

# Oracle® Communications

## Cloud Native Core Automated Testing Suite

### Guide



Release 24.2.7  
F99365-21  
October 2025

ORACLE®

Copyright © 2019, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## 1 Introduction

---

|     |                  |   |
|-----|------------------|---|
| 1.1 | Overview         | 1 |
| 1.2 | Deployment Model | 2 |
| 1.3 | References       | 3 |

## 2 ATS Framework Features

---

|         |                                                                    |    |
|---------|--------------------------------------------------------------------|----|
| 2.1     | ATS API                                                            | 3  |
| 2.1.1   | Generating an API Token for a User                                 | 3  |
| 2.1.2   | Use the RESTful Interfaces                                         | 5  |
| 2.1.2.1 | Configuring Host                                                   | 5  |
| 2.1.2.2 | Starting Jobs                                                      | 6  |
| 2.1.2.3 | Monitoring Jobs                                                    | 15 |
| 2.1.2.4 | Stopping Jobs                                                      | 17 |
| 2.1.2.5 | Getting Test Suite Artifacts                                       | 19 |
| 2.2     | ATS Feature Activation and Deactivation                            | 22 |
| 2.3     | ATS GUI Enhancements                                               | 24 |
| 2.4     | ATS Health Check                                                   | 26 |
| 2.5     | ATS Jenkins Job Queue                                              | 36 |
| 2.6     | Application Log Collection                                         | 37 |
| 2.6.1   | Application Log Collection and Parallel Test Execution Integration | 39 |
| 2.7     | ATS Maintenance Scripts                                            | 40 |
| 2.7.1   | ATS Scripts                                                        | 41 |
| 2.7.2   | Updating ats_install.sh                                            | 42 |
| 2.7.3   | Restarting Jenkins without Restarting Pod                          | 42 |
| 2.7.4   | Updating Stub Scripts                                              | 43 |
| 2.7.5   | Running ATS and Stub Deployment Scripts                            | 44 |
| 2.8     | ATS System Name and Version Display on the ATS GUI                 | 44 |
| 2.9     | ATS Tagging Support                                                | 45 |
| 2.9.1   | Combination of Tags and their Results                              | 47 |
| 2.10    | Custom Folder Implementation                                       | 49 |
| 2.11    | Individual Stage Group Selection                                   | 50 |
| 2.12    | Lightweight Performance                                            | 51 |
| 2.12.1  | Configure <NF>-Performance Pipeline                                | 51 |

|          |                                                                    |    |
|----------|--------------------------------------------------------------------|----|
| 2.13     | Managing Final Summary Report, Build Color, and Application Log    | 52 |
| 2.14     | Modifying Login Password                                           | 59 |
| 2.15     | Multiselection Capability for Features and Scenarios               | 60 |
| 2.15.1   | Feature Level Selection                                            | 60 |
| 2.15.2   | Scenario Selection                                                 | 61 |
| 2.16     | Parallel Test Execution                                            | 62 |
| 2.16.1   | ATS GUI Page Changes                                               | 63 |
| 2.16.2   | ATS Console Log Changes                                            | 64 |
| 2.16.3   | Downloading or Viewing Individual Group Logs                       | 65 |
| 2.17     | Parameterization                                                   | 68 |
| 2.17.1   | Running Test Cases                                                 | 69 |
| 2.18     | PCAP Log Collection                                                | 71 |
| 2.18.1   | Application Log Collection and Parallel Test Execution Integration | 71 |
| 2.19     | Persistent Volume for 5G ATS                                       | 72 |
| 2.19.1   | Processing Flow                                                    | 72 |
| 2.19.2   | Deploying Persistent Volume                                        | 72 |
| 2.19.3   | Backward Porting                                                   | 77 |
| 2.20     | Single Click Job Creation                                          | 77 |
| 2.20.1   | Configuring Single Click Job                                       | 77 |
| 2.21     | Support for ATS Deployment in OCI                                  | 80 |
| 2.21.1   | Accessing ATS GUI in OCI                                           | 80 |
| 2.21.2   | Adding Ingress and Egress Rules to Access the OCI Console          | 81 |
| 2.22     | Support for Transport Layer Security                               | 85 |
| 2.22.1   | Deploy ATS with TLS Enabled                                        | 86 |
| 2.22.1.1 | Generate JKS File for Jenkins Server                               | 86 |
| 2.22.1.2 | Enable ATS GUI with HTTPS                                          | 91 |
| 2.23     | Test Results Analyzer                                              | 93 |
| 2.23.1   | Accessing Test Results Analyzer Feature                            | 93 |
| 2.24     | Support for Test Case Mapping and Count                            | 96 |
| 2.24.1   | Access Test Case Mapping and Count Feature                         | 96 |

### 3 Installing ATS for Different Network Functions

---

|         |                                                |    |
|---------|------------------------------------------------|----|
| 3.1     | Installing ATS for BSF                         | 1  |
| 3.1.1   | Resource Requirements                          | 1  |
| 3.1.2   | Downloading the ATS Package                    | 4  |
| 3.1.3   | Deploy ATS with TLS Enabled                    | 5  |
| 3.1.3.1 | Generate JKS File for Jenkins Server           | 5  |
| 3.1.3.2 | Enable TLS on Python Stubs                     | 9  |
| 3.1.3.3 | Enable ATS GUI with HTTPS                      | 11 |
| 3.1.4   | Pushing the Images to Customer Docker Registry | 12 |
| 3.1.5   | Configuring ATS                                | 14 |



|         |                                                           |    |
|---------|-----------------------------------------------------------|----|
| 3.1.5.1 | Enabling Static Port                                      | 14 |
| 3.1.5.2 | Enable Static API Node Port                               | 14 |
| 3.1.5.3 | Service Account Requirements                              | 15 |
| 3.1.5.4 | Enabling Aspen Service Mesh                               | 15 |
| 3.1.5.5 | Enabling Health Check                                     | 17 |
| 3.1.5.6 | Enabling Persistent Volume                                | 19 |
| 3.1.5.7 | ATS-BSF API Extended Support                              | 22 |
| 3.1.6   | Deploying ATS and Pods                                    | 22 |
| 3.1.6.1 | Deploying ATS in Kubernetes Cluster                       | 22 |
| 3.1.6.2 | Deploying Stub Pod in Kubernetes Cluster                  | 23 |
| 3.1.6.3 | Deploying DNS Stub in Kubernetes Cluster                  | 25 |
| 3.1.6.4 | Deploying ocdiam Simulator in Kubernetes Cluster          | 27 |
| 3.1.7   | Post-Installation Steps                                   | 28 |
| 3.2     | Installing ATS for NEF                                    | 30 |
| 3.2.1   | Resource Requirements                                     | 30 |
| 3.2.2   | Downloading the ATS Package                               | 33 |
| 3.2.3   | Pushing the Images to Customer Docker Registry            | 35 |
| 3.2.4   | Configuring ATS                                           | 36 |
| 3.2.4.1 | Enabling Static Port                                      | 36 |
| 3.2.5   | Deploying ATS, Stub and CNC Console in Kubernetes Cluster | 37 |
| 3.2.5.1 | Deploy and Configure CNC Console                          | 38 |
| 3.2.5.2 | Creating Console secrets                                  | 39 |
| 3.2.6   | Verifying ATS Deployment                                  | 39 |
| 3.3     | Installing ATS for NRF                                    | 39 |
| 3.3.1   | Resource Requirements                                     | 40 |
| 3.3.2   | Downloading the ATS Package                               | 41 |
| 3.3.3   | Pushing the Images to Customer Docker Registry            | 42 |
| 3.3.4   | Configuring ATS                                           | 43 |
| 3.3.4.1 | Enabling Static Port                                      | 43 |
| 3.3.4.2 | Enabling Aspen Service Mesh                               | 43 |
| 3.3.4.3 | Enabling Persistent Volume                                | 45 |
| 3.3.4.4 | Enabling NF FQDN Authentication                           | 46 |
| 3.3.5   | Deploying ATS and Stub in Kubernetes Cluster              | 46 |
| 3.3.6   | Verifying ATS Deployment                                  | 47 |
| 3.3.7   | Post-Installation Steps (if Persistent Volume is Used)    | 49 |
| 3.4     | Installing ATS for NSSF                                   | 49 |
| 3.4.1   | Resource Requirements                                     | 49 |
| 3.4.2   | Locating and Downloading ATS and Simulator Images         | 51 |
| 3.4.3   | Deploying ATS in Kubernetes Cluster                       | 53 |
| 3.5     | Installing ATS for Policy                                 | 60 |
| 3.5.1   | Resource Requirements                                     | 60 |
| 3.5.2   | Downloading the ATS Package                               | 64 |

|         |                                                      |     |
|---------|------------------------------------------------------|-----|
| 3.5.3   | Pushing the Images to Customer Docker Registry       | 66  |
| 3.5.4   | Configuring ATS                                      | 67  |
| 3.5.4.1 | Enabling Static Port                                 | 67  |
| 3.5.4.2 | Enabling Static API Node Port                        | 68  |
| 3.5.4.3 | Service Account Requirements                         | 68  |
| 3.5.4.4 | Enabling Aspen Service Mesh                          | 69  |
| 3.5.4.5 | Enabling Persistent Volume                           | 72  |
| 3.5.4.6 | Enabling Health Check                                | 75  |
| 3.5.4.7 | ATS-Policy API Extended Support                      | 76  |
| 3.5.5   | Deploying ATS and Pods                               | 77  |
| 3.5.5.1 | Deploying ATS in Kubernetes Cluster                  | 77  |
| 3.5.5.2 | Deploying Stub Pod in Kubernetes Cluster             | 77  |
| 3.5.5.3 | Deploying DNS Stub in Kubernetes Cluster             | 82  |
| 3.5.5.4 | Deploying AMF Stub in Kubernetes Cluster             | 83  |
| 3.5.5.5 | Deploying LDAP Stub in Kubernetes Cluster            | 84  |
| 3.5.5.6 | Deploying ocdiam Simulator in Kubernetes Cluster     | 85  |
| 3.5.6   | Post-Installation Steps                              | 87  |
| 3.6     | Installing ATS for SCP                               | 89  |
| 3.6.1   | Prerequisites                                        | 89  |
| 3.6.1.1 | Software Requirements                                | 89  |
| 3.6.1.2 | Environment Setup Requirements                       | 90  |
| 3.6.1.3 | Resource Requirements                                | 90  |
| 3.6.1.4 | Downloading the ATS Package                          | 91  |
| 3.6.1.5 | Pushing the Images to Customer Docker Registry       | 100 |
| 3.6.1.6 | Preinstall Preparation of SCP for SCP-ATS            | 102 |
| 3.6.1.7 | Preinstallation Preparation for SCP-ATS              | 106 |
| 3.6.2   | Configuring SCP-ATS and SCP                          | 109 |
| 3.6.2.1 | Updating ATS Configuration                           | 110 |
| 3.6.3   | Deploying ATS and Stub in the Kubernetes Cluster     | 126 |
| 3.6.4   | Post Installation and Deployment Steps               | 127 |
| 3.6.4.1 | Verifying ATS Deployment                             | 127 |
| 3.6.4.2 | Modifying the scpc-alternate-resolution Microservice | 128 |
| 3.6.4.3 | ATS Testcase Parametrization on User Input           | 128 |
| 3.6.5   | Appendix                                             | 138 |
| 3.6.5.1 | Creating Custom Service Account                      | 138 |
| 3.6.5.2 | Adding New Stubs to SCP-ATS                          | 138 |
| 3.7     | Installing ATS for SEPP                              | 139 |
| 3.7.1   | Resource Requirements                                | 139 |
| 3.7.1.1 | SEPP ATS Compatibility Matrix                        | 142 |
| 3.7.2   | Downloading the ATS Package                          | 142 |
| 3.7.3   | Pushing the Images to Customer Docker Registry       | 143 |
| 3.7.4   | Creating Secrets and Support for TLSv1.2 and TLSv1.3 | 144 |

|          |                                                                                                             |     |
|----------|-------------------------------------------------------------------------------------------------------------|-----|
| 3.7.4.1  | Configuring Root Certificate                                                                                | 144 |
| 3.7.4.2  | Generating ATS Certificate                                                                                  | 146 |
| 3.7.4.3  | Creating ATS Secret and Configuring Helm chart                                                              | 149 |
| 3.7.4.4  | Create ATS Health Check secret                                                                              | 151 |
| 3.7.5    | Configuring ATS                                                                                             | 153 |
| 3.7.5.1  | Enabling Aspen Service Mesh                                                                                 | 153 |
| 3.7.5.2  | ATS API                                                                                                     | 154 |
| 3.7.5.3  | Enabling Static Port                                                                                        | 155 |
| 3.7.5.4  | Enabling Roaming Hub Mode                                                                                   | 155 |
| 3.7.5.5  | Enabling Hosted SEPP Mode                                                                                   | 155 |
| 3.7.5.6  | Configuring Egress Rate Limiting Feature                                                                    | 156 |
| 3.7.5.7  | Configuring Ingress Rate Limiting Feature                                                                   | 156 |
| 3.7.5.8  | Configuring the Cache Refresh Timeout Value                                                                 | 156 |
| 3.7.5.9  | Configuring the Topology Cache Refresh Timeout Value                                                        | 157 |
| 3.7.5.10 | Configuring the Security Counter Measure Cache Refresh Timeout                                              | 157 |
| 3.7.5.11 | Configuring the n32cHandshakePlmnIdListValidationEnabled                                                    | 158 |
| 3.7.5.12 | Request Timeout                                                                                             | 161 |
| 3.7.5.13 | Idle Timeout                                                                                                | 162 |
| 3.7.5.14 | EvictSanHeaderCacheDelay                                                                                    | 162 |
| 3.7.5.15 | Configuring the Reroute Attempts for Egress Gateway                                                         | 163 |
| 3.7.5.16 | NRF Discovery Cache Refresh Timeout                                                                         | 163 |
| 3.7.5.17 | Configuring Alternate Routing based on the DNS SRV Record for Home Network Functions                        | 163 |
| 3.7.5.18 | Configuring Load Sharing among Multiple Remote SEPP Nodes                                                   | 165 |
| 3.7.5.19 | Enabling Persistent Volume Storage                                                                          | 166 |
| 3.7.6    | Deploying ATS in Kubernetes Cluster                                                                         | 166 |
| 3.7.7    | Verifying ATS Deployment                                                                                    | 167 |
| 3.7.8    | Post Installation Steps (If persistent volume is used)                                                      | 168 |
| 3.8      | Installing ATS for UDR                                                                                      | 168 |
| 3.8.1    | Resource Requirements                                                                                       | 168 |
| 3.8.2    | Locating and Downloading ATS Image                                                                          | 184 |
| 3.8.3    | Preparing to Deploy ATS and Stub Pods                                                                       | 186 |
| 3.8.4    | Loading UDR ATS Image                                                                                       | 186 |
| 3.8.5    | Loading UDR Stub Images in the SLF-NewFeatures, EIR-NewFeatures, SLF-Regression, or EIR-Regression Pipeline | 188 |
| 3.8.6    | Loading UDR Stub Images in the UDR-NewFeatures or UDR-Regression Pipeline                                   | 190 |
| 3.8.7    | Configuring ATS                                                                                             | 192 |
| 3.8.7.1  | Configuring Docker Registry                                                                                 | 193 |
| 3.8.7.2  | Enabling Static Port                                                                                        | 193 |
| 3.8.7.3  | Enabling Persistent Volume                                                                                  | 193 |
| 3.8.7.4  | Settings for OAuth2 Test Cases                                                                              | 194 |
| 3.8.7.5  | Enabling IPv6 on ATS                                                                                        | 195 |

|         |                                                   |     |
|---------|---------------------------------------------------|-----|
| 3.8.7.6 | Configuring ATS to Run Health-Check Pipeline      | 195 |
| 3.8.7.7 | Creating Service Account                          | 196 |
| 3.8.7.8 | Enabling Service Mesh                             | 197 |
| 3.8.7.9 | Configuring Stubs                                 | 199 |
| 3.8.8   | Deploying ATS in Kubernetes Cluster               | 203 |
| 3.8.8.1 | Deploying ATS Pod and Stubs in Kubernetes Cluster | 203 |
| 3.8.9   | Verifying ATS Deployment                          | 204 |
| 3.8.10  | Post Installation Steps                           | 209 |

## 4 Running NF Test Cases Using ATS

---

|       |                                     |    |
|-------|-------------------------------------|----|
| 4.1   | Running BSF Test Cases using ATS    | 1  |
| 4.1.1 | Prerequisites                       | 1  |
| 4.1.2 | Logging into ATS                    | 5  |
| 4.1.3 | Running BSF_NewFeatures Pipeline    | 7  |
| 4.1.4 | Running BSF_HealthCheck Pipeline    | 11 |
| 4.1.5 | BSF_NewFeatures Documentation       | 12 |
| 4.1.6 | Running BSF Regression Pipeline     | 13 |
| 4.1.7 | BSF_Regression Documentation        | 14 |
| 4.2   | Running NEF Test Cases using ATS    | 14 |
| 4.2.1 | Prerequisites                       | 15 |
| 4.2.2 | Logging into ATS                    | 23 |
| 4.2.3 | NEF-NewFeatures Pipeline            | 25 |
| 4.2.4 | NEF-NewFeatures Documentation       | 32 |
| 4.2.5 | NEF-Regression Pipeline             | 32 |
| 4.2.6 | NEF-Regression Documentation        | 37 |
| 4.3   | Running NRF Test Cases using ATS    | 38 |
| 4.3.1 | Prerequisites                       | 38 |
| 4.3.2 | Logging into ATS                    | 48 |
| 4.3.3 | NRF-NewFeatures Pipeline            | 50 |
| 4.3.4 | NRF-NewFeatures Documentation       | 60 |
| 4.3.5 | NRF-Regression Pipeline             | 62 |
| 4.3.6 | NRF-Regression Documentation        | 64 |
| 4.4   | Running NSSF Test Cases using ATS   | 67 |
| 4.4.1 | Prerequisites                       | 67 |
| 4.4.2 | Logging into ATS                    | 67 |
| 4.4.3 | NSSF-NewFeatures Pipeline           | 69 |
| 4.4.4 | NSSF-NewFeatures Documentation      | 79 |
| 4.4.5 | NSSF-Regression Pipeline            | 80 |
| 4.4.6 | NSSF-Regression Documentation       | 88 |
| 4.5   | Running Policy Test Cases using ATS | 89 |
| 4.5.1 | Prerequisites                       | 89 |

|         |                                                                   |     |
|---------|-------------------------------------------------------------------|-----|
| 4.5.2   | Logging into ATS                                                  | 95  |
| 4.5.3   | Running Policy-HealthCheck Pipeline                               | 96  |
| 4.5.4   | Running Policy-NewFeatures Pipeline                               | 97  |
| 4.5.5   | Policy-NewFeatures Documentation                                  | 104 |
| 4.5.6   | Running Policy-Regression Pipeline                                | 106 |
| 4.5.7   | Policy-Regression Documentation                                   | 107 |
| 4.6     | Running SCP Test Cases using ATS                                  | 108 |
| 4.6.1   | Logging in to ATS                                                 | 109 |
| 4.6.2   | SCP-NewFeatures Pipeline                                          | 111 |
| 4.6.2.1 | Configuring New Feature Pipelines                                 | 111 |
| 4.6.2.2 | Running SCP New Feature Pipelines                                 | 115 |
| 4.6.2.3 | SCP-NewFeatures Documentation                                     | 117 |
| 4.6.3   | SCP-Regression Pipeline                                           | 118 |
| 4.6.3.1 | Configuring Regression Pipelines                                  | 119 |
| 4.6.3.2 | Running Regression Pipelines                                      | 122 |
| 4.6.3.3 | SCP-Regression Documentation                                      | 123 |
| 4.7     | Running SEPP Test Cases using ATS                                 | 132 |
| 4.7.1   | Prerequisites                                                     | 132 |
| 4.7.2   | Logging into ATS                                                  | 134 |
| 4.7.3   | SEPP-NewFeatures Pipeline                                         | 137 |
| 4.7.4   | NewFeatures - Documentation                                       | 140 |
| 4.7.5   | SEPP Regression Pipeline                                          | 141 |
| 4.7.6   | SEPP Regression Documentation                                     | 142 |
| 4.7.7   | Running SEPP Health Check Pipeline                                | 143 |
| 4.8     | Running UDR Test Cases using ATS                                  | 145 |
| 4.8.1   | Prerequisites                                                     | 145 |
| 4.8.1.1 | Prerequisites for SLF Pipelines                                   | 145 |
| 4.8.1.2 | Prerequisites for UDR Pipelines                                   | 155 |
| 4.8.1.3 | Prerequisites for EIR Pipelines                                   | 168 |
| 4.8.2   | UDR Golden Configuration Support                                  | 174 |
| 4.8.3   | UDR Application Log Collection                                    | 178 |
| 4.8.4   | Parallel Test Execution                                           | 181 |
| 4.8.5   | Logging into ATS                                                  | 211 |
| 4.8.6   | Running SLF Pipelines                                             | 212 |
| 4.8.6.1 | Running SLF-NewFeatures Pipeline                                  | 213 |
| 4.8.6.2 | Running SLF Regression Pipeline - Single Site Deployment          | 218 |
| 4.8.6.3 | Running SLF Regression Pipeline - Multiple Site Deployment        | 222 |
| 4.8.6.4 | Running SLF HealthCheck Pipeline                                  | 226 |
| 4.8.6.5 | Running SLF-Performance Pipeline: Model 2: Single Site Deployment | 228 |
| 4.8.6.6 | SLF NewFeatures Documentation - Single Site Scenarios             | 230 |
| 4.8.6.7 | SLF Regression Documentation - Single Site Scenarios              | 231 |
| 4.8.6.8 | SLF Regression Documentation - Multiple Site Scenarios            | 232 |

|         |                                  |     |
|---------|----------------------------------|-----|
| 4.8.7   | Running UDR Pipelines            | 232 |
| 4.8.7.1 | Running UDR NewFeatures Pipeline | 233 |
| 4.8.7.2 | Running UDR Regression Pipeline  | 239 |
| 4.8.7.3 | Running UDR HealthCheck Pipeline | 247 |
| 4.8.7.4 | UDR NewFeatures Documentation    | 249 |
| 4.8.7.5 | UDR Regression Documentation     | 250 |
| 4.8.8   | Running EIR Pipelines            | 251 |
| 4.8.8.1 | Running EIR NewFeatures Pipeline | 251 |
| 4.8.8.2 | Running EIR Regression Pipeline  | 255 |
| 4.8.8.3 | Running EIR HealthCheck Pipeline | 259 |
| 4.8.8.4 | EIR NewFeatures Documentation    | 260 |
| 4.8.8.5 | EIR Regression Documentation     | 261 |

# My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

- For Technical issues such as creating a new Service Request (SR), select **1**.
- For Non-technical issues such as registration or assistance with My Oracle Support, select **2**.
- For Hardware, Networking and Solaris Operating System Support, select **3**.

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

# Acronyms

The following table lists the acronyms and the terminologies used in the document:

**Table    Acronyms**

| Acronym | Meaning                                                                                                                                                                                                                                                         |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ATS     | Oracle Communications Cloud Native Core, Automated Test Suite                                                                                                                                                                                                   |
| BDD     | Behavior Driven Development                                                                                                                                                                                                                                     |
| BSF     | Oracle Communications Cloud Native Core, Binding Support Function                                                                                                                                                                                               |
| CI      | Continuous Integration                                                                                                                                                                                                                                          |
| EIR     | Equipment Identity Register                                                                                                                                                                                                                                     |
| Policy  | Oracle Communications Cloud Native Core, Converged Policy                                                                                                                                                                                                       |
| NEF     | Oracle Communications Cloud Native Core, Network Exposure Function                                                                                                                                                                                              |
| NRF     | Oracle Communications Cloud Native Core, Network Repository Function                                                                                                                                                                                            |
| NSSF    | Oracle Communications Cloud Native Core, Network Slice Selection Function                                                                                                                                                                                       |
| CNE     | Oracle Communications Cloud Native Core, Cloud Native Environment                                                                                                                                                                                               |
| OL      | Oracle Linux is a Linux distribution packaged and freely distributed by Oracle, available partially under the GNU (General Public License) since late 2006. It is compiled from Red Hat Enterprise Linux source code, replacing Red Hat branding with Oracle's. |
| PCF     | Oracle Communications Cloud Native Core, Policy Control Function                                                                                                                                                                                                |
| cnPCRF  | Oracle Communications Cloud Native Core, Policy and Charging Rules Function                                                                                                                                                                                     |
| SAN     | Subject Alternative Name                                                                                                                                                                                                                                        |
| SCP     | Oracle Communications Cloud Native Core, Service Communication Proxy                                                                                                                                                                                            |
| SEPP    | Oracle Communications Cloud Native Core, Security Edge Protection Proxy                                                                                                                                                                                         |
| SLF     | Subscriber Location Function                                                                                                                                                                                                                                    |
| UDR     | Oracle Communications Cloud Native Core, Unified Data Repository                                                                                                                                                                                                |



# What's New in This Guide

This section introduces the documentation updates for release 24.2.x.

## ATS Framework Release 24.2.7 - F99365-21, October 2025

### NRF Release 24.2.6

- ATS release tag for NRF is changed to 24.2.6.
- Updated the following sections with the new images for 24.2.6:
  - [Logging into ATS](#)
  - [NRF-NewFeatures Pipeline](#)
  - [NRF-Regression Pipeline](#)
- **New Test Cases added:** Yes.
- **Number of new Test Cases added to pipeline:** New Features: Provides a total of **37** features files with **98** new scenarios.
- **Previous Release Test Cases:** Provides a total of **585** feature files with **1649** scenarios.
  - "2-Site-Geo" cases: These are part of Regression pipeline. It has **7** feature files with **19** scenarios. These are already provided 2 Site Geo test cases.
  - "3-Site-Geo" cases: These are part of Regression pipeline. There are **10** feature files with **14** scenarios.
  - "NF-FQDN-Authentication-Feature" cases: These are also part of Regression pipeline. It has **6** feature files with **28** scenarios.
  - "CCA-Header" cases: These are part of Regression pipeline. It has **6** feature files with **18** scenarios.
  - "NRF-Growth" cases: Provides a total of **21** features files with **28** new scenarios.
  - "All-Except-Above-Options" suite: Provides a total of **585** feature files with **1649** scenarios.

## ATS Framework Release 24.2.7 - F99365-20, October 2025

### SCP Release 24.2.6

- ATS release tags for SCP is changed to 24.2.6.
- Updated the supported ATS framework version in the [Table 1-1](#).
- Number of test cases in SCP\_NewFeatures pipeline: No additional feature files from the last release.
- Number of test cases in the SCP\_Regression pipeline: No additional feature files from the last release.

### UDR Release 24.2.7

- ATS release tags for UDR is changed to 24.2.7.
- There are no new test cases added for this release.

## ATS Framework Release 24.2.6 - F99365-19, July 2025

### NRF Release 24.2.5

- ATS release tag for NRF is changed to 24.2.5.
- Updated the following sections with the new images for 24.2.5:
  - [Logging into ATS](#)
  - [NRF-NewFeatures Pipeline](#)
  - [NRF-Regression Pipeline](#)
- **New Test Cases added:** Yes.
- **Number of new Test Cases added to pipeline:** New Features: Provides a total of **36** features files with **95** new scenarios.
- **Previous Release Test Cases:** Provides a total of **632** feature files with **1747** scenarios.
  - "2-Site-Geo" cases: These are part of Regression pipeline. It has **7** feature files with **19** scenarios. These are already provided 2 Site Geo test cases.
  - "3-Site-Geo" cases: These are part of Regression pipeline. There are **6** feature files with **15** scenarios.
  - "NF-FQDN-Authentication-Feature" cases: These are also part of Regression pipeline. It has **5** feature files with **25** scenarios.
  - "CCA-Header" cases: These are part of Regression pipeline. It has **6** feature files with **18** scenarios (1 new scenario is added to the regression pipeline).
  - "NRF-Growth" cases: Provides a total of **22** features files with **30** new scenarios (1 new scenario is added to the regression pipeline).
  - "All-Except-Above-Options" suite: Provides a total of **585** feature files with **1649** scenarios.

#### UDR Release 24.2.6

- ATS release tags for UDR is changed to 24.2.6.
- There are no new test cases added for this release.

#### ATS Framework Release 24.2.6 - F99365-18, July 2025

#### SCP Release 24.2.5

- ATS release tags for SCP is changed to 24.2.5.
- Number of test cases in SCP\_NewFeatures pipeline: No additional feature files from the last release.
- Number of test cases in the SCP\_Regression pipeline: No additional feature files from the last release.

#### SEPP Release 24.2.4

- ATS release tags for SEPP is changed to 24.2.4.
- Number of test cases in SEPP\_NewFeatures pipeline: No additional feature files from the last release.
- Number of test cases in the SEPP\_Regression pipeline: No additional feature files from the last release.

#### Policy Release 24.2.7

- ATS release tags for Policy is changed to 24.2.7.
- There are no new test cases added for this release.

#### BSF Release 24.2.4

- ATS release tag for BSF is changed to 24.2.4.
- There are no new test cases added for this release.

#### ATS Framework Release 24.2.5 - F99365-17, June 2025

##### UDR Release 24.2.5

- ATS release tags for UDR is changed to 24.2.5.
- There are no new test cases added for this release.

#### ATS Framework Release 24.2.5 - F99365-16, June 2025

##### Policy Release 24.2.6

- ATS release tags for Policy is changed to 24.2.6.
- There are no new test cases added for this release.

#### ATS Framework Release 24.2.5 - F99365-15, April 2025

##### Policy Release 24.2.5

- ATS release tags for Policy is changed to 24.2.5.
- Number of new Test Cases added to pipeline (PCF): Provides a total of **24 feature files** and **41 scenarios** of Policy\_NewFeatures pipeline.
- Number of new Test Cases added to pipeline (cnPCRF): Provides a total of **2 feature file** and **3 scenarios** of Policy\_NewFeatures pipeline.
- Number of new Test Cases added to pipeline (Converged Policy): Provides a total of **27 feature files** and **48 scenarios** of Policy\_NewFeatures pipeline.
- Previous Release Test Cases (PCF): Provides a total of **198 feature files** and **595 scenarios** of Policy\_Regression pipeline.
- Previous Release Test Cases (cnPCRF): Provides a total of **23 feature files** and **80 scenarios** of Policy\_Regression pipeline.
- Previous Release Test Cases (Converged Policy): Provides a total of **251 feature files** and **772 scenarios** of Policy\_Regression pipeline.

##### BSF Release 24.2.3

- ATS release tag for BSF is changed to 24.2.3.
- Number of new Test Cases added to pipeline: Provides a total of **1 feature file** and **12 scenario** of BSF\_NewFeatures pipeline.
- Previous Release Test Cases: Provides a total of **28 feature files** and **89 scenarios** of BSF\_Regression pipeline.

#### ATS Framework Release 24.2.4 - F99365-14, April 2025

##### SEPP Release 24.2.3

- ATS release tag for SEPP is changed to 24.2.3.
- Number of test cases in SEPP\_NewFeatures pipeline: No additional feature files from the last release.
- Number of test cases in the SEPP\_Regression pipeline: No additional feature files from the last release.

##### SCP Release 24.2.4

- ATS release tag for SCP is changed to 24.2.4.
- Number of test cases in SCP\_NewFeatures pipeline: No additional feature files from the last release.
- Number of test cases in the SCP\_Regression pipeline: No additional feature files from the last release.
- Number of sanity features: No sanity features.

#### UDR Release 24.2.4

- ATS release tag for UDR is changed to 24.2.4.
- **Number of Test Cases in UDR-NewFeatures pipeline:** Provides a total of **8** test cases with **2** MultiSite scenarios.
- Updated multiple images according to release 24.2.4.
- Updated [Table 4-19](#) to add UDR\_PCF\_Notification\_Subs\_Delete.feature.

#### ATS Framework Release 24.2.4 - F99365-13, April 2025

##### NRF Release 24.2.4

- ATS release tag for NRF is changed to 24.2.4.
- Updated the following sections with the new images for 24.2.4:
  - [Logging into ATS](#)
  - [NRF-NewFeatures Pipeline](#)
  - [NRF-Regression Pipeline](#)
- **New Test Cases added:** Yes.
- **Number of new Test Cases added to pipeline:** New Features: Provides a total of **33** features files with **82** new scenarios.
- **Previous Release Test Cases:** Provides a total of **632** feature files with **1747** scenarios.
  - "2-Site-Geo" cases: These are part of Regression pipeline. It has **7** feature files with **19** scenarios. These are already provided 2 Site Geo test cases.
  - "3-Site-Geo" cases: These are part of Regression pipeline. There are **6** feature files with **15** scenarios.
  - "NF-FQDN-Authentication-Feature" cases: These are also part of Regression pipeline. It has **5** feature files with **25** scenarios.
  - "CCA-Header" cases: These are part of Regression pipeline. It has **6** feature files with **18** scenarios (1 new scenario is added to the regression pipeline).
  - "NRF-Growth" cases: Provides a total of **22** features files with **30** new scenarios (1 new scenario is added to the regression pipeline).
  - "All-Except-Above-Options" suite: Provides a total of **585** feature files with **1649** scenarios.

#### ATS Framework Release 24.2.4 - F99365-12, March 2025

##### Policy Release 24.2.4

- ATS release tags for Policy is changed to 24.2.4.
- There are no new test cases added for this release.

## ATS Framework Release 24.2.4 - F99365-11, February 2025

### SCP Release 24.2.3

- ATS release tag for SCP is changed to 24.2.3.
- Number of test cases in SCP\_NewFeatures pipeline: No additional feature files from the last release.
- Number of test cases in the SCP\_Regression pipeline: No additional feature files from the last release.
- Number of sanity features: No sanity features.

## ATS Framework Release 24.2.4 - F99365-10, January 2025

### BSF Release 24.2.2

- ATS release tag for BSF is changed to 24.2.2.
- Number of new Test Cases added to pipeline: Provides a total of **1 feature file** and **12 scenario** of BSF\_NewFeatures pipeline.
- Previous Release Test Cases: Provides a total of **34 feature files** and **97 scenarios** of BSF\_Regression pipeline.

### Policy Release 24.2.3

- ATS release tags for Policy is changed to 24.2.3.
- Number of new Test Cases added to pipeline (PCF): Provides a total of **40 feature files** and **73 scenarios** of Policy\_NewFeatures pipeline.
- Number of new Test Cases added to pipeline (cnPCRF): Provides a total of **4 feature file** and **7 scenarios** of Policy\_NewFeatures pipeline.
- Number of new Test Cases added to pipeline (Converged Policy): Provides a total of **47 feature files** and **88 scenarios** of Policy\_NewFeatures pipeline.
- Previous Release Test Cases (PCF): Provides a total of **260 feature files** and **769 scenarios** of Policy\_Regression pipeline.
- Previous Release Test Cases (cnPCRF): Provides a total of **32 feature files** and **103 scenarios** of Policy\_Regression pipeline.
- Previous Release Test Cases (Converged Policy): Provides a total of **333 feature files** and **1004 scenarios** of Policy\_Regression pipeline.

## ATS Framework Release 24.2.4 - F99365-09, January 2025

### UDR Release 24.2.3

- ATS release tags for UDR is changed to 24.2.3.
- Updated multiple images according to release 24.2.3.
- There are no new test cases added for this release.

## ATS Framework Release 24.2.4 - F99365-08, January 2025

### NRF Release 24.2.3

- ATS release tag for NRF is changed to 24.2.3.
- Updated the following sections with the new images for 24.2.3:
  - [Logging into ATS](#)

- [NRF-NewFeatures Pipeline](#)
- [NRF-Regression Pipeline](#)
- **New Test Cases added:** Yes.
- **Number of new Test Cases added to pipeline:** New Features: Provides a total of **32** features files with **77** new scenarios.
- **Previous Release Test Cases:** Provides a total of 585 feature files with 1649 scenarios.
  - "2-Site-Geo" cases: These are part of Regression pipeline. It has 6 feature files with 15 scenarios. These are already provided 2 Site Geo test cases.
  - "3-Site-Geo" cases: There are 10 feature files with 14 scenarios.
  - "NF-FQDN-Authentication-Feature" cases: These are also part of Regression pipeline. It has 5 feature files with 25 scenarios.
  - "CCA-Header" cases: These are part of Regression pipeline. It has 6 feature files with 18 scenarios (1 new scenario is added to the regression pipeline).
  - "NRF-Growth" cases: Provides a total of 21 features files with 28 new scenarios (1 new scenario is added to the regression pipeline).
  - "All-Except-Above-Options" suite: Provides a total of 585 feature files with 1649 scenarios.

#### ATS Framework Release 24.2.3 - F99365-07, January 2025

##### SEPP Release 24.2.3

- ATS release tags for SEPP is changed to 24.2.3.
- Updated multiple images according to release 24.2.3.

#### ATS Framework Release 24.2.3 - F99365-06, December 2024

##### UDR Release 24.2.2

- ATS release tags for UDR is changed to 24.2.2.
- **Number of Test Cases in UDR-NewFeatures pipeline:** Provides a total of **54** test cases with **2** MultiSite scenarios.
- Updated multiple images according to release 24.2.2.
- Added UDR\_POST\_existing\_subscription.feature in the [Table 4-19](#).

#### ATS Framework Release 24.2.3 - F99365-05, November 2024

##### Policy Release 24.2.2

- ATS release tags for Policy is changed to 24.2.2.
- There are no new test cases added for this release.

#### ATS Framework Release 24.2.3 - F99365-04, October 2024

##### UDR Release 24.2.1

- ATS release tag for UDR is changed to 24.2.1.
- Updated multiple images according to release 24.2.1.
- There are no new test cases added for this release.

##### SCP Release 24.2.2

- ATS release tag for SCP is changed to 24.2.2.
- Number of test cases in SCP\_NewFeatures pipeline: No additional feature files from the last release.
- Number of test cases in the SCP\_Regression pipeline: No additional feature files from the last release.
- Number of sanity features: No sanity features.

#### SEPP Release 24.2.1

- ATS release tag for SEPP is changed to 24.2.1.
- Number of test cases in SEPP\_NewFeatures pipeline (in SEPP mode): 7 new feature files and 102 new scenarios.
- Number of test cases in SEPP\_Regression pipeline (in SEPP mode): 150 feature files and 862 scenarios.
- Number of test cases in SEPP\_NewFeatures pipeline (in Roaming Hub mode): 1 new feature files and 1 new scenarios.
- Number of test cases in SEPP\_Regression pipeline (in Roaming Hub mode): 135 feature files and 662 scenarios.

#### NRF Release 24.2.2

- ATS release tag for NRF is changed to 24.2.2.
- Updated the following sections with the new images for 24.2.2
  - [Logging into ATS](#)
  - [NRF-NewFeatures Pipeline](#)
  - [NRF-Regression Pipeline](#)
- **New Test Cases added:** Yes.
- **Number of new Test Cases added to pipeline:**
  - **NewFeatures:** Provides a total of **32** features files with **77** new scenarios.
  - **Previous Release Test Cases:** Provides a total of **582** feature files with **1639** scenarios.
    - \* "2-Site-Geo" cases: These are part of Regression pipeline. It has 6 feature files with 15 scenarios. These are already provided 2 Site Geo test cases.
    - \* "3-Site-Geo" cases: There are 10 feature files with 14 scenarios.
    - \* "NF-FQDN-Authentication-Feature" cases: These are also part of Regression pipeline. It has 5 feature files with 25 scenarios.
    - \* "CCA-Header" cases: These are part of Regression pipeline. It has 6 feature files with 18 scenarios (1 new scenario is added to the regression pipeline).
    - \* "NRF-Growth" cases: Provides a total of 21 features files with 28 new scenarios (1 new scenario is added to the regression pipeline).
    - \* "All-Except-Above-Options" suite: Provides a total of 582 feature files with 1639 scenarios (2 scenarios are added as part of bug fix.)

#### ATS Framework Release 24.2.2 - F99365-03, October 2024

##### Policy Release 24.2.1

- ATS release tags for Policy is changed to 24.2.1.

- Number of new Test Cases added to pipeline (PCF): Provides a total of **40 feature files** and **73 scenarios** of Policy\_NewFeatures pipeline.
- Number of new Test Cases added to pipeline (cnPCRF): Provides a total of **4 feature file** and **7 scenarios** of Policy\_NewFeatures pipeline.
- Number of new Test Cases added to pipeline (Converged Policy): Provides a total of **47 feature files** and **88 scenarios** of Policy\_NewFeatures pipeline.
- Previous Release Test Cases (PCF): Provides a total of **256 feature files** and **746 scenarios** of Policy\_Regression pipeline.
- Previous Release Test Cases (cnPCRF): Provides a total of **32 feature files** and **103 scenarios** of Policy\_Regression pipeline.
- Previous Release Test Cases (Converged Policy): Provides a total of **327 feature files** and **974 scenarios** of Policy\_Regression pipeline.
- Updated the following sections with 24.2.1 release updates:
  - [Downloading the ATS Package](#)
  - [Pushing the Images to Customer Docker Registry](#)

#### BSF Release 24.2.1

- ATS release tag for BSF is changed to 24.2.1.
- Number of new Test Cases added to pipeline: Provides a total of **47 feature file** and **88 scenario** of BSF\_NewFeatures pipeline.
- Previous Release Test Cases: Provides a total of **327 feature files** and **974 scenarios** of BSF\_Regression pipeline.
- Updated the following sections with the new images for 24.2.1:
  - [Downloading the ATS Package](#)
  - [Pushing the Images to Customer Docker Registry](#)

#### ATS Framework Release 24.2.2 - F99365-02, September 2024

##### NRF Release 24.2.1

- ATS release tag for NRF is changed to 24.2.1.
- Updated the following sections with the new images for 24.2.1
  - [Logging into ATS](#)
  - [NRF-NewFeatures Pipeline](#)
  - [NRF-Regression Pipeline](#)
- **New Test Cases added:** Yes.
- **Number of new Test Cases added to pipeline:**
  - **NewFeatures:** Provides a total of **28** features files with **67** new scenarios.
  - **Previous Release Test Cases:** Provides a total of **582** feature files with **1639** scenarios.
    - \* "2-Site-Geo" cases: These are part of Regression pipeline. It has 6 feature files with 15 scenarios. These are already provided 2 Site Geo test cases.
    - \* "3-Site-Geo" cases: There are 10 feature files with 14 scenarios.
    - \* "NF-FQDN-Authentication-Feature" cases: These are also part of Regression pipeline. It has 5 feature files with 25 scenarios.



- \* "CCA-Header" cases: These are part of Regression pipeline. It has 6 feature files with 18 scenarios (1 new scenario is added to the regression pipeline).
- \* "NRF-Growth" cases: Provides a total of 21 features files with 28 new scenarios (1 new scenario is added to the regression pipeline).
- \* "All-Except-Above-Options" suite: Provides a total of 582 feature files with 1639 scenarios (2 scenarios are added as part of bug fix.)

### SCP Release 24.2.1

- ATS release tag for SCP is changed to 24.2.1.
- Number of test cases in SCP\_NewFeatures pipeline: 10 new feature files with 28 new scenarios for Release 16 and no new feature file with no new scenarios for Release 15 SCP deployments.
- Number of test cases in the SCP\_Regression pipeline: 329 feature files with 2129 scenarios for Release 16, and 39 feature files with 366 scenarios for Release 15 SCP deployments.
- Number of sanity features: 27 sanity features and 46 test cases for Release 16.

### ATS Framework Release 24.2.2 - F99365-01, August 2024

#### BSF Release 24.2.0

- ATS release tag for BSF is changed to 24.2.0.
- Updated [ATS Framework Features](#) section for BSF 24.2.0 features.
- Number of new Test Cases added to pipeline: Provides a total of **1 feature file** and **10 scenario** of BSF\_NewFeatures pipeline.
- Previous Release Test Cases: Provides a total of **28 feature files** and **88 scenarios** of BSF\_Regression pipeline.
- Added details of [Deploy ATS with TLS Enabled](#) section to access the ATS BSF GUI with the HTTPS protocol.
- Updated the following sections with 24.2.0 release updates under **Installing ATS for BSF**:
  - [Downloading the ATS Package](#)
  - [Pushing the Images to Customer Docker Registry](#)
- Updated the following sections with 24.2.0 release updates under **Running BSF Test Cases using ATS**:
  - [Logging into ATS](#)
  - [Running BSF\\_HealthCheck Pipeline](#)
  - [Running BSF\\_NewFeatures Pipeline](#)
  - [BSF\\_NewFeatures Documentation](#)
  - [Running BSF Regression Pipeline](#)
  - [BSF\\_Regression Documentation](#)

#### Policy Release 24.2.0

- ATS release tags for Policy is changed to 24.2.0.
- Number of new Test Cases added to pipeline (PCF): Provides a total of **23 feature files** and **40 scenarios** of Policy\_NewFeatures pipeline.

- Number of new Test Cases added to pipeline (cnPCRF): Provides a total of **2 feature file** and **3 scenarios** of Policy\_NewFeatures pipeline.
- Number of new Test Cases added to pipeline (Converged Policy): Provides a total of **26 feature files** and **47 scenarios** of Policy\_NewFeatures pipeline.
- Previous Release Test Cases (PCF): Provides a total of **194 feature files** and **572 scenarios** of Policy\_Regression pipeline.
- Previous Release Test Cases (cnPCRF): Provides a total of **23 feature files** and **80 scenarios** of Policy\_Regression pipeline.
- Previous Release Test Cases (Converged Policy): Provides a total of **247 feature files** and **749 scenarios** of Policy\_Regression pipeline.
- Updated the following sections with 24.2.0 release updates:
  - [Downloading the ATS Package](#)
  - [Pushing the Images to Customer Docker Registry](#)
- Updated the following sections with 24.2.0 release updates under Running Policy Test Cases using ATS:
  - [Logging into ATS](#)
  - [Running Policy-HealthCheck Pipeline](#)
  - [Running Policy-NewFeatures Pipeline](#)
  - [Policy-NewFeatures Documentation](#)
  - [Running Policy-Regression Pipeline](#)
  - [Policy-Regression Documentation](#)

#### UDR Release 24.2.0

- ATS release tag for UDR is changed to 24.2.0.
- **Number of Test Cases in UDR-NewFeatures pipeline:** Provides a total of **47** test cases with **2** MultiSite scenarios.
- **Number of Test Cases in EIR-NewFeatures pipeline:** Provides a total of **4** test cases.
- **Number of Test Cases in Single and Multiple Site SLF-NewFeatures pipeline:** **12** test cases.
- **Number of Test Cases in SLF-Regression pipeline:** **365** test cases with **21** MultiSite scenarios.
- **Number of Test Cases in UDR-Regression pipeline:** **1413** test cases with **22** MultiSite scenarios.
- **Number of Test Cases in EIR-Regression pipeline:** **280** test cases.
- Updated the vCPUs and Memory in UDR - Total Number of Resources table. For more information, see [Table 3-27](#).
- Updated the Notify-Stub Replicas (ATS deployment) in ATS Resource Requirements for UDR mode table. For more information, see [Table 3-33](#).

#### NEF Release 24.2.0

- ATS release tag for NEF is changed to 24.2.0.
- Updated the following sections with 24.2.0 release updates:
  - [Resource Requirements](#)
  - [Downloading the ATS Package](#)

- [Pushing the Images to Customer Docker Registry](#)
- [Deploying ATS, Stub and CNC Console in Kubernetes Cluster](#)
- The following sections are updated for the CAPIF Integration with the CNC Console feature:
  - [Prerequisites](#)
  - [NEF-NewFeatures Pipeline](#)
  - [Resource Requirements](#)
- Number of test cases in NEF\_NewFeatures pipeline: 5 new feature files and 19 new scenarios
- Number of test cases in NEF\_Regression pipeline: 124 feature files and 691 scenarios

#### SCP Release 24.2.0

- ATS release tag for SCP is changed to 24.2.0.
- Number of test cases in SCP\_NewFeatures pipeline: 10 new feature files with 28 new scenarios for Release 16 and no new feature file with no new scenarios for Release 15 SCP deployments.
- Number of test cases in the SCP\_Regression pipeline: 329 feature files with 2129 scenarios for Release 16, and 39 feature files with 366 scenarios for Release 15 SCP deployments.
- Number of sanity features: 27 sanity features and 46 test cases for Release 16.
- Updated the following sections with 24.2.0 release updates:
  - [Logging in to ATS](#)
  - [SCP-NewFeatures Pipeline](#)
  - [SCP-Regression Pipeline](#)
  - [Downloading the ATS Package](#)
  - [Modifying the scpc-alternate-resolution Microservice](#)

#### SEPP Release 24.2.0

- ATS release tag for SEPP is changed to 24.2.0.
- Updated multiple images according to release 24.2.0.
- Updated the [SEPP ATS Compatibility Matrix](#) section.
- Updated the [Resource Requirements](#) section.
- Added the following section:
  - [ATS API](#)
- Updated the following section:
  - [Enabling Aspen Service Mesh](#)
- Number of test cases in SEPP\_NewFeatures pipeline (in SEPP mode): 7 new feature files and 102 new scenarios.
- Number of test cases in SEPP\_Regression pipeline (in SEPP mode): 150 feature files and 862 scenarios.
- Number of test cases in SEPP\_NewFeatures pipeline (in Roaming Hub mode): 1 new feature files and 1 new scenarios.

- Number of test cases in SEPP\_Regression pipeline (in Roaming Hub mode): 135 feature files and 662 scenarios.

#### NSSF Release 24.2.0

- ATS release tag for NSSF is changed to 24.2.0.
- Updated the following sections with the new images for 24.2.0
  - [Prerequisites](#)
  - [Logging into ATS](#)
  - [NSSF-NewFeatures Pipeline](#)
  - [NSSF-Regression Pipeline](#)
- **New Test Cases added:** Yes.
- **Number of new Test Cases added to pipeline:**
  - **NewFeatures:** Provides a total of 3 features files with 55 new scenarios.
  - **Regression:** Provides a total of 76 feature files with 730 scenarios.

#### NRF Release 24.2.0

- ATS release tag for NRF is changed to 24.2.0.
- Updated the following sections with the new images for 24.2.0
  - [Logging into ATS](#)
  - [NRF-NewFeatures Pipeline](#)
  - [NRF-NewFeatures Documentation](#)
  - [NRF-Regression Pipeline](#)
- **New Test Cases added:** Yes.
- **Number of new Test Cases added to pipeline:**
  - **NewFeatures:** Provides a total of **21** features files with **44** new scenarios.
  - **Previous Release Test Cases:** Provides a total of **628** feature files with **1750** scenarios.
    - \* "2-Site-Geo" cases: These are part of Regression pipeline. It has 6 feature files with 15 scenarios. These are already provided 2 Site Geo test cases.
    - \* "3-Site-Geo" cases: There are 10 feature files with 14 scenarios.
    - \* "NF-FQDN-Authentication-Feature" cases: These are also part of Regression pipeline. It has 5 feature files with 25 scenarios.
    - \* "CCA-Header" cases: These are part of Regression pipeline. It has 5 feature files with 18 scenarios (1 new scenario is added to the regression pipeline).
    - \* "NRF-Growth" cases: Provides a total of 20 features files with 28 new scenarios (1 new scenario is added to the regression pipeline).
    - \* "All-Except-Above-Options" suite: Provides a total of 582 feature files with 1639 scenarios (2 scenarios are added as part of bug fix.)
- Updated the [Prerequisites](#) section with a requirement for running the NRF ATS test cases with CNE HA Prometheus.

# 1

## Introduction

This document provides information about Automated Testing Suite (ATS) deployment model for 5G Network Functions (NFs).

ATS allows you to run software test cases using an automated testing tool. It compares the actual results with the expected or predicted results.

### 1.1 Overview

Using ATS, you can deploy and test 5G NFs.

This document provides information to implement ATS for the following 5G NFs:

- Oracle Communications Cloud Native Core, Binding Support Function (BSF)
- Oracle Communications Cloud Native Core, Converged Policy (Policy)
- Oracle Communications Cloud Native Core, Network Exposure Function (NEF)
- Oracle Communications Cloud Native Core, Network Repository Function (NRF)
- Oracle Communications Cloud Native Core, Network Slice Selection Function (NSSF)
- Oracle Communications Cloud Native Core, Service Communication Proxy (SCP)
- Oracle Communications Cloud Native Core, Security Edge Protection Proxy (SEPP)
- Oracle Communications Cloud Native Core, Unified Data Repository (UDR)

#### **ATS for 5G Network Functions**

For 5G NFs, ATS is developed using Oracle Linux 8-slim as the base image. Jenkins is a part of the ATS image, and it provides a graphical user interface (GUI) to test either a single NF or multiple NFs independently in the same network environment.

ATS comprises NF docker images, ATS image, simulator images, and test cases of the specific NF. All these images and test cases constitute a fully automated suite to deploy and test NFs. You can combine it with any other Continuous Integration (CI) pipeline with minimal changes because 5G ATS uses Jenkins as GUI.

The ATS package contains the following elements:

- Test scripts and docker images of test container. The docker images have complete framework and libraries installed, which are common for all NFs working with the Behavior Driven Development (BDD) framework.
- Docker image of HTTP Server simulator.
- Helm chart to deploy the ATS (delivered as a tar file).
- Readme text file (.txt file).

ATS provides basic environment, framework, and a GUI (Jenkins) to run all the functional test cases.

## ATS Framework Version with Supporting NF Version

Table 1-1 ATS Framework Version with Supporting NF

| ATS Framework Version | BSF    | NEF    | NRF            | NSSF   | Policy         | SCP            | SEPP           | UDR            |
|-----------------------|--------|--------|----------------|--------|----------------|----------------|----------------|----------------|
| 24.2.2                | 24.2.1 | 24.2.0 | 24.2.0, 24.2.1 | 24.2.0 | 24.2.1         | 24.2.1         | 24.2.0         | 24.2.0         |
| 24.2.3                | -      | -      | 24.2.2         | 24.2.2 | 24.2.2         | 24.2.1, 24.2.2 | 24.2.1, 24.2.2 | 24.2.2         |
| 24.2.4                | 24.2.2 | -      | 24.2.3         | -      | 24.2.4         | 24.2.3         | -              | 24.2.3         |
| 24.2.5                | 24.2.3 | -      | 24.2.4         | -      | 24.2.5, 24.2.6 | 24.2.4         | -              | 24.2.4, 24.2.5 |
| 24.2.6                | 24.2.4 | -      | 24.2.5         | -      | 24.2.7         | 24.2.5         | 24.2.5         | 24.2.6, 24.2.7 |
| 24.2.7                | -      | -      | 24.2.6         | -      | -              | 24.2.6         | -              | -              |

## 1.2 Deployment Model

According to the In-Cluster deployment model, ATS can coexist in the same cluster where the NFs are deployed. This deployment model is useful for In-Cluster testing.

Figure 1-1 In-Cluster Deployment Model in OCCNE

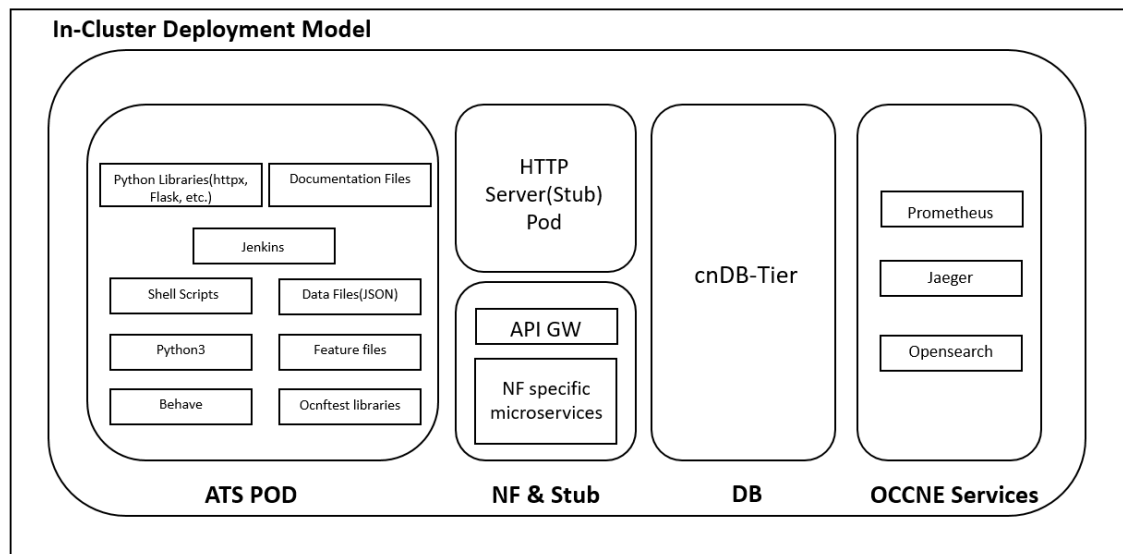
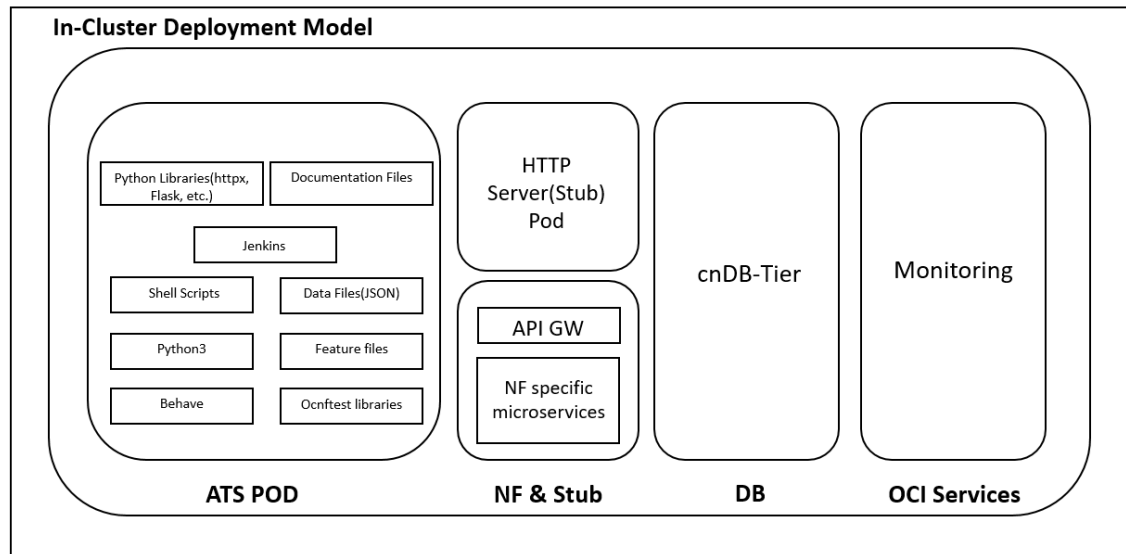


**Figure 1-2 In-Cluster Deployment Model in OCI**

## 1.3 References

For more information about NFs and their deployment processes, refer to the following documents:

- *Oracle Communications Cloud Native Core, Binding Support Function Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Configuration Console Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Network Exposure Function Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Network Repository Function Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Network Slice Selection Function Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Networks Data Analytics Function Installation Guide*
- *Oracle Communications Cloud Native Core, Policy Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Provisioning Gateway Guide*
- *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Security Edge Protection Proxy Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*

# 2

## ATS Framework Features

This chapter describes ATS Framework features.

The following table lists ATS framework features supported by different NFs:

**Table 2-1 ATS Framework Features Compliance Matrix**

| Features                                                           | BSF | NEF                                               | NRF | NSSF | Policy | SCP | SEPP | UDR                                                                                |
|--------------------------------------------------------------------|-----|---------------------------------------------------|-----|------|--------|-----|------|------------------------------------------------------------------------------------|
| <a href="#">ATS API</a>                                            | Yes | No                                                | Yes | No   | Yes    | No  | Yes  | Partially compliant (In starting jobs, executing all test cases is only supported) |
| <a href="#">ATS Feature Activation and Deactivation</a>            | Yes | Yes                                               | No  | No   | Yes    | No  | Yes  | Yes                                                                                |
| <a href="#">ATS GUI Enhancements</a>                               | Yes | Yes                                               | Yes | Yes  | Yes    | Yes | Yes  | Yes                                                                                |
| <a href="#">ATS Health Check</a>                                   | Yes | No                                                | No  | Yes  | Yes    | No  | Yes  | Yes                                                                                |
| <a href="#">ATS Jenkins Job Queue</a>                              | Yes | Yes                                               | No  | No   | Yes    | Yes | Yes  | Yes                                                                                |
| <a href="#">Application Log Collection</a>                         | Yes | Yes                                               | No  | No   | Yes    | Yes | Yes  | Yes                                                                                |
| <a href="#">ATS Maintenance Scripts</a>                            | Yes | Yes                                               | Yes | Yes  | Yes    | Yes | Yes  | Yes                                                                                |
| <a href="#">ATS System Name and Version Display on Jenkins GUI</a> | Yes | Yes                                               | Yes | Yes  | Yes    | Yes | Yes  | Yes                                                                                |
| <a href="#">ATS Tagging Support</a>                                | No  | Yes                                               | No  | No   | Yes    | No  | No   | No                                                                                 |
| <a href="#">Custom Folder Implementation</a>                       | Yes | Yes                                               | Yes | Yes  | Yes    | Yes | Yes  | Yes                                                                                |
| <a href="#">Individual Stage Group Selection</a>                   | Yes | Partially compliant (functionality not supported) | No  | No   | Yes    | Yes | Yes  | No                                                                                 |
| <a href="#">Lightweight Performance</a>                            | No  | No                                                | No  | No   | No     | No  | No   | Yes                                                                                |



Table 2-1 (Cont.) ATS Framework Features Compliance Matrix

| Features                                                                        | BSF                                                                                                        | NEF                                                                                                        | NRF                                                        | NSSF                                                                                                       | Policy | SCP                                                        | SEPP                                                                                                                                          | UDR                                                        |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|--------|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| <a href="#">Managing Final Summary Report, Build Color, and Application Log</a> | Yes                                                                                                        | Yes                                                                                                        | Partially compliant (Application Log is not supported.)    | Yes                                                                                                        | Yes    | Yes                                                        | Yes                                                                                                                                           | Yes                                                        |
| <a href="#">Modifying Login Password</a>                                        | Yes                                                                                                        | Yes                                                                                                        | Yes                                                        | Yes                                                                                                        | Yes    | Yes                                                        | Yes                                                                                                                                           | Yes                                                        |
| <a href="#">Multiselection Capability for Features and Scenarios</a>            | Yes                                                                                                        | Yes                                                                                                        | Partially compliant (Feature level selection is supported) | No                                                                                                         | Yes    | Partially compliant (Feature level selection is supported) | Partially compliant (Feature level selection is supported)                                                                                    | Partially compliant (Feature level selection is supported) |
| <a href="#">Parallel Test Execution</a>                                         | Partially compliant (Parallel Test Execution Framework integrated, but only supports sequential execution) | Partially compliant (Parallel Test Execution Framework integrated, but only supports sequential execution) | No                                                         | Partially compliant (Parallel Test Execution Framework integrated, but only supports sequential execution) | Yes    | Yes                                                        | Partially compliant (Parallel Test Execution Framework integrated, but ATS test cases need to be organized to utilize the parallel execution) | Yes (UDR, SLF, and EIR)                                    |
| <a href="#">Parameterization</a>                                                | Yes                                                                                                        | Yes                                                                                                        | Partially compliant (Supports only new features)           | No                                                                                                         | Yes    | Yes                                                        | Yes                                                                                                                                           | Yes                                                        |
| <a href="#">PCAP Log Collection</a>                                             | No                                                                                                         | No                                                                                                         | No                                                         | No                                                                                                         | No     | Yes                                                        | Yes                                                                                                                                           | Yes                                                        |
| <a href="#">Persistent Volume</a>                                               | Yes                                                                                                        | Yes                                                                                                        | Yes                                                        | Yes                                                                                                        | Yes    | Yes                                                        | Yes                                                                                                                                           | Yes                                                        |
| <a href="#">Single Click Job Creation</a>                                       | Yes                                                                                                        | Yes                                                                                                        | Yes                                                        | Yes                                                                                                        | Yes    | Yes                                                        | Yes                                                                                                                                           | Yes                                                        |

**Table 2-1 (Cont.) ATS Framework Features Compliance Matrix**

| Features                                             | BSF | NEF | NRF | NSSF | Policy | SCP | SEPP | UDR |
|------------------------------------------------------|-----|-----|-----|------|--------|-----|------|-----|
| <a href="#">Support for ATS Deployment in OCI</a>    | No  | No  | No  | No   | No     | Yes | Yes  | No  |
| <a href="#">Support for Transport Layer Security</a> | No  | Yes | No  | No   | No     | Yes | Yes  | No  |
| <a href="#">Test Result Analyzer</a>                 | Yes | Yes | Yes | Yes  | Yes    | Yes | Yes  | Yes |
| <a href="#">Test Case mapping and Count</a>          | Yes | Yes | No  | No   | Yes    | Yes | Yes  | Yes |

## 2.1 ATS API

The Application Programming Interface (API) feature provides APIs to perform routine ATS tasks as follows:

- **Start:** To initiate one of the three test suites, such as Regression, New Features, or Performance.
- **Monitor:** To obtain the progress of a test suite's execution.
- **Stop:** To cancel an active test suite.
- **Get Artifacts:** To retrieve the JUNIT format XML test result files for a completed test suite.

For more information about configuring the tasks, see [Use the RESTful Interfaces](#).

### 2.1.1 Generating an API Token for a User

An API token that has to be generated for the user to perform routine ATS tasks using the Restful Interfaces API. Any API call requires the use of an API token for authentication. You can generate the API token, and it works until it is revoked or deleted.

Perform the following procedure to generate an API token for a user:

1. Log in to Jenkins as an NF API user to generate an API token.

Figure 2-1   ATS Login Page

Oracle Communications Cloud Native Core - Automated Test Suite

Welcome to ATS!

Username

policyapiuser

Password

.....

☐ Keep me signed in

Sign in

2. Click user name from the drop-down list at the top right of the Jenkins GUI, and then click **Configure**.

Figure 2-2   Configure to Add Token

Dashboard

+ New Item

Build History

Build Queue

No builds in the queue.

Build Executor Status

0/1

Oracle Communications Cloud Native Core

Automated Test Suite

CNCATS POLICY : 24.2.6

All

| S   | W | Name ↓             | Last Success | Last Failure | Last Duration | F   |
|-----|---|--------------------|--------------|--------------|---------------|-----|
| ... | ☀ | Policy-HealthCheck | N/A          | N/A          | N/A           | ▶ ☆ |
| ... | ☀ | Policy-NewFeatures | N/A          | N/A          | N/A           | ▶ ☆ |
| ... | ☀ | Policy-Performance | N/A          | N/A          | N/A           | ▶ ☆ |
| ... | ☀ | Policy-Regression  | N/A          | N/A          | N/A           | ▶ ☆ |

3. In the **API Token** section, click **Add New Token**.

Figure 2-3   Add New Token

API Token

Current token(s) ?

There are no registered tokens for this user.

Add new Token

4. Enter a suitable name for the token, such as policy, and then click **Generate**.

**Figure 2-4 Generate Token**

API Token

Current token(s) ?

There are no registered tokens for this user.

policy Generate Cancel

Add new Token

5. Copy and save the generated token.  
You cannot retrieve the token after closing the prompt.

**Figure 2-5 Save Generated Token**

API Token

Current token(s) ?

policy 1171eda238dc75119765021d448a15d36e 📄 ✖

⚠️ Copy this token now, because it cannot be recovered in the future.

Add new Token

6. Click **Save**.  
An API token is generated and can be used for starting, monitoring, and stopping a job using the REST API.

## 2.1.2 Use the RESTful Interfaces

This section provides an overview of each RESTful interface.

### 2.1.2.1 Configuring Host

The host to access the ATS GUI will remain the same in non-OCI setup.

#### For OCI Setup

The following two ways are supported to access the ATS API in OCI:

#### Using Loadbalancer IP

1. Add proper Ingress/Egress security rules for ATS API port (5001) and ATS service nodeport corresponding to ATS API port in loadbalancer (nf\_lb\_subnet) and node subnet (nf\_node\_subnet). To add ingress and egress security rules, see the [Adding Ingress and Egress Rules to Access the OCI Console](#) section.
2. If this step is not performed to access GUI, then insert the following annotations under the **Metadata** section to assign an external IP (Loadbalancer IP):

```
oci-network-load-balancer.oraclecloud.com/security-list-management-mode:
None
oci.oraclecloud.com/load-balancer-type: nlb
```

3. Edit and save the ATS service after ATS deployment:

For example,

```
kubectl edit svc ats-service-name -n
    ats-namespace
```

4. Access the GUI using URL: <http/https>://<Loadbalancer IP>:5001

#### Note

The assignment of Loadbalancer IP to the ATS service is subject to availability. If the Loadbalancer IP is not assigned to the ATS service even after applying the required annotations, try to debug on the OCI side.

### Using Tunneling

1. Add an ingress security rule for the node subnet (nf\_node\_subnet) to allow TCP traffic on all ports from the operator subnet. To add ingress and egress security rules, see the [Adding Ingress and Egress Rules to Access the OCI Console](#) section.
2. Run the following ssh tunneling command from a bash terminal on your local PC:

```
ssh -f -N -i <operator instance private key> -o StrictHostKeyChecking=no -o ProxyCommand="ssh -i <bastion private key> -o StrictHostKeyChecking=no -W %h:%p <bastion username>@<bastion IP>" <operator instance username>@<operator instance IP> -L <desired system port>:<Worker Node IP>:<ATS API NodePort> -o ServerAliveInterval=60 -o ServerAliveCountMax=300
```

For example, ssh -f -N -i id\_rsa -o StrictHostKeyChecking=no -o ProxyCommand="ssh -i id\_rsa -o StrictHostKeyChecking=no -W %h:%p opc@129.287.66.123" opc@10.1.76.7 -L 5009:10.9.60.118:32018 -o ServerAliveInterval=60 -o ServerAliveCountMax=300

Here, ATS GUI URL is http://localhost:5009

### TROUBLESHOOTING

If the ATS API returns an error stating "Network is unreachable," ensure that there is a proper ingress security rule in the loadbalancer subnet (nf\_lb\_subnet) allowing traffic from the system where the ATS API is being utilized.

## 2.1.2.2 Starting Jobs

To start a job, use the following RESTful interfaces:

- Default Jenkins API: The default Jenkins API to start a pipeline job
- Custom API: To start a job forcibly

#### Starting a Job using Default Jenkins API

If any other job is already running, the job started with this API goes to Jenkins' job queue.

- Run the following command to start a job (Default Jenkins method):

```
curl --request POST <Jenkins_host_port>/job/<Pipeline_name>/buildWithParameters -user <username>:<API_token> --verbose
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST <Jenkins_host_port>/job/<Pipeline_name>/
buildWithParameters --user <username>:<API_token> --verbose --cacert
<path_to_root_certificate>
```

For example,

```
curl --request POST http://10.123.154.163:30427/job/Policy-NewFeatures/
buildWithParameters
--user policyapiuser:111ad02d7471cec9ca689696e9c7a55c62 --verbose
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST https://10.75.217.25:30301/job/SCP-Regression/
buildWithParameters --user
scpapiuser:11c2fde49cea6eb8f332ad23a7877ea2de --verbose --cacert
caroot.cer
```

### Starting a Job Forcibly using Custom API

If another job is already running and has not been started by an API user, the running job is aborted, along with all other jobs in the queue that have not been started by an API user, and a new job is started.

If the running job is started by the API user, the new job does not start, and the start job request fails, returning a message in response: Build <job\_id> of pipeline <pipeline\_name> is already running, triggered by an API user.

Builds are aborted gracefully by a forceful API, such as when a running scenario completes its execution and cleanup before the corresponding build is aborted.

The forceful API now returns an aborted-builds parameter in response, which contains job IDs for all the aborted builds. It also returns a parameter called `cancelled_builds_in_queue`, which contains queue IDs for all the builds aborted in queue.

If a job ID is assigned to a build in queue, it contains a list of two values: [queueid, jobid] rather than just the queue ID.

Run the following command to start a job forcibly:

```
curl -s --request POST <Startjob_host_port>/build -H "Content-Type:
application/json" -d '{"pipelineName": "<Pipeline_name>", "pageAndQuery":
"<pageAndQuery>"}' --user <username>:<token> --verbose
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl -s --request POST
<Startjob_host_port>/build -H "Content-Type: application/json" -d
'{"pipelineName": "<Pipeline_name>", "pageAndQuery":
"<pageAndQuery>"}' --user <username>:<token> --verbose
--cacert <path_to_root_certificate>
```

For example,

```
curl --request POST http://10.75.217.25:31170/build -H "Content-Type:
application/json" -d
  '{"pipelineName": "Policy-Regression",
  "pageAndQuery": "buildWithParameters"}'
--user policyapiuser:11c1a628f808972c846c510151afa13ba2 --verbose
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST https://10.75.217.25:30170/build -H "Content-Type:
application/json" -d
  '{"pipelineName": "Policy-Regression",
  "pageAndQuery": "buildWithParameters"}'
--user policyapiuser:11c1a628f808972c846c510151afa13ba2 --verbose --cacert
caroot.cer
```

The details of the parameters for the API are as follows:

**Table 2-2 API Parameters**

| Parameters         | Mandatory | Default Value | Description                                                                                                                                                                                                                                             |
|--------------------|-----------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| username           | YES       | NA            | This parameter indicates the name of API user.                                                                                                                                                                                                          |
| token              | YES       | NA            | This parameter indicates the API token for API user.                                                                                                                                                                                                    |
| Startjob_host_port | YES       | NA            | This parameter's format is <code>&lt;host&gt;:&lt;port&gt;</code> <ul style="list-style-type: none"> <li><code>&lt;host&gt;</code> will be same as Jenkins host</li> <li><code>&lt;port&gt;</code> will be different( 5001 or its nodeport )</li> </ul> |
| pipelineName       | YES       | NA            | This parameter indicates the name of the pipeline for which build is to be triggered.                                                                                                                                                                   |
| pageAndQuery       | YES       | NA            | This parameter can have two values: <ul style="list-style-type: none"> <li><code>buildWithParameters</code>: for parametrized pipelines</li> <li><code>build</code>: for non-parametrized pipelines</li> </ul>                                          |

Table 2-2 (Cont.) API Parameters

| Parameters        | Mandatory | Default Value | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-----------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| jenkins_wait_time | NO        | 5             | <p>This parameter indicates the wait time for Jenkins in seconds.</p> <ul style="list-style-type: none"> <li>If Jenkins is very slow in responding and the API response is not as expected, this wait time can be increased.</li> <li>It is required when multiple running builds must be aborted before starting a new API build.</li> <li>This value can be provided along with the parameters "pipelineName" and "pageAndQuery" in a similar way. For example:</li> </ul> <pre>{"jenkins_wait_time": "10"}</pre> |

### Customizing Job Parameters

Both of the Start APIs start the pipeline job with default parameter values. You can provide a different value for a parameter in an API call, such as paramx=valuex.

1. Append paramx=value to buildWithParameters?.

Example 1,

```
curl --request POST 10.75.217.40:31378/job/Policy-NewFeatures/
buildWithParameters?paramx=valuex --user
policyapiuser:110ed65222b9e63445689314998ff8c3bk -- verbose
```

Example 2,

```
curl --request POST 10.75.217.4:32476/build -H "Content-Type: application/
json" -d '{
  "pipelineName": "Policy-NewFeatures", "pageAndQuery":
  "buildWithParameters?paramx=valuex" }' --user <username>:<token>
--verbose
```

2. To add more than 1 parameter, such as paramx=valuex and paramy=value, append the other parameters to the API call using &.

Example 1,

```
curl --request POST 10.75.217.40:31378/job/Policy-NewFeatures/
buildWithParameters?paramx=valuex&paramy=value
--user policyapiuser:110ed65222b9e63445689314998ff8c3bk -- verbose
```

Example 2,

```
curl --request POST 10.75.217.4:32476/build -H "Content-Type: application/
json" -d '{"pipelineName": "Policy-NewFeatures", "pageAndQuery":
```



```
"buildWithParameters?paramx=valuex&paramy=aluey" }' --user
<username>:<token> --verbose
```

3. Replace buildWithParameters? with build for non-parametrized pipeline jobs.
4. Start the pipeline by using the default Jenkins API or by changing the pageAndQuery parameter's value to build in the following way:

```
curl --request POST <Jenkins_host_port>/job/<Pipeline_name>/build --user
<username>:<API_token> --verbose
```

Example 1,

```
curl --request POST 10.75.217.40:31378/job/Policy-NewFeatures/build --user
policyapiuser:110ed65222b9e63445689314998ff8c3bk --
verbose
```

Example 2,

```
curl --request POST 10.75.217.4:32476/build -H "Content-Type: application/
json" -d '{
    "pipelineName": "Policy-NewFeatures", "pageAndQuery": "build" }'--
user <username>:<token> -verbose
```

Currently, the ATS API has enhanced capabilities to include triggering builds for running individual or multiple features, scenarios, stages, groups, and tagged executions.

```
curl --request
POST <IP>:<PORT>/build -H
"Content-Type: application/json" -d '{"pipelineName": "<NF PIPELINE>",
"pageAndQuery": "buildWithParameters", "otherBuildParameters": { } }' --user
<NF>apiuser:<token> --verbose
```

When the value of atsGuiTLSEnabled parameter is set to true:

```
curl --request POST <IP>:<PORT>/build \
-H "Content-Type: application/json" \
-d '{
    "pipelineName": "<NF PIPELINE>",
    "pageAndQuery": "buildWithParameters",
    "otherBuildParameters": {
    }
}' \
--user <NF>apiuser:<Token> \
--verbose
```

#### Note

The API continues to support the same functionality as in the previous release. In addition, to provide extended support, a new key "otherBuildParameters" has been introduced. This key can be included in the JSON payload sent to the server.

The following table lists the details of "otherBuildParameters" for the API request:

**Table 2-3 otherBuildParameters Details**

| Parameter            | Mandatory/Optional | Default Value | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------|--------------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| otherBuildParameters | Optional           | NA            | <p>"otherBuildParameters" is a dictionary of build parameters. You can add key-value pairs to customize the build process. For example: "otherBuildParameters" :</p> <pre>{ "Features" :   "YamlSchema_Import_Export_Custom_Jsons",   "Stages" :   "stage2,stage3",   "Groups" :   { "stage1" :     "group1,group4",     "stage4" :     "group4,group5" } }</pre> <p>This dictionary supports the following keys:</p> <ul style="list-style-type: none"> <li>• Features</li> <li>• Scenarios</li> <li>• FeaturesAndScenarios</li> <li>• Stages</li> <li>• Groups</li> <li>• Feature_Include_Tags</li> <li>• Feature_Exclude_Tags</li> <li>• Scenario_Include_Tags</li> <li>• Scenario_Exclude_Tags</li> </ul> |

**Note**

If none of the keys in "otherBuildParameters" are included in the API request, all the test cases with the given execution options will be triggered.

Parameters that are static in the UI should not be included in the "pageAndQuery" parameter of the request. Only parameters with multiple options should be passed. For example, in the UDR pipeline image below, the variables highlighted in red should not be included in the API request, while the parameters highlighted in green can be passed.

**Figure 2-6 Execution Option**

| EXECUTION OPTIONS   |                        |                                                                                                              |                    |
|---------------------|------------------------|--------------------------------------------------------------------------------------------------------------|--------------------|
| TestSuite           | SUT                    | SUTSuite                                                                                                     | Configuration_Type |
| Regression          | UDR                    | All                                                                                                          | Product_Config     |
| Include_NewFeatures | Fetch_Log_Upon_Failure | Log_Type                                                                                                     | Log_Level          |
| NO                  | NO                     | For PcapLog collection debug container must be running<br><input checked="" type="checkbox"/> Not Applicable | Not Applicable     |

The following is the format for the API request:

- Example format for executing features, stages, scenarios, or groups through the API request:

```
curl --request POST <IP>:<PORT>/build \
-H "Content-Type: application/json" \
-d '{
  "pipelineName": "<NF PIPELINE>",
  "pageAndQuery": "buildWithParameters",
  "otherBuildParameters": {
    "Features": "<Feature List>",
    "Stages": "<stages>",
    "Groups": { "stage-n": "<group-a,group-b>", "stage-m": "<group-
p,group-q>" },
    "Scenarios": "",
    "Featuresandscenarios": {
      "<Feature 1>": "<Scenario1>",
      "<Feature2>": "<Scenario1>,<Scenario2>"
    }
  }
}' \
--user <NF>apiuser:<Token> \
--verbose
```

- Example format for executing test cases based on provided tags. If tags are specified, other keys such as "Features", "Scenarios", "Stages", and so on, should not be included.

```
curl --request POST <IP>:<PORT>/build \
-H "Content-Type: application/json" \
-d '{
  "pipelineName": "<NF PIPELINE>",
  "pageAndQuery": "buildWithParameters",
  "otherBuildParameters": {
    "Feature_Include_Tags": "<tags>",
    "Feature_Exclude_Tags": "<tags>",
    "Scenario_Include_Tags": "<Tags>",
    "Scenario_Exclude_Tags": "<Tags>"
  }
}' \
--user <NF>apiuser:<Token> \
--verbose
```

## Starting a job with otherBuildParameters

### Execute Features

In the API request, the user can include all parameters such as SUT, Fetch\_Log\_Upon\_Failure, and so on, within the "pageAndQuery" key. Features can be specified in the request using the "otherBuildParameters" dictionary as shown below:

```
"otherBuildParameters" : { "Features" : "<Comma separated FeatureList>" }
```

For example:

```
curl --request POST 10.75.217.25:30100/build \
-H "Content-Type: application/json" \
-d '{
  "pipelineName": "Policy-Regression",
  "pageAndQuery": "buildWithParameters",
  "otherBuildParameters": {
    "Features":
      "NF_Scoring,ManualGetDeleteSession_DeleteSelectivepcfBindingswithSUPI",
  }
}' \
--user policyapiuser:11c1a628f808972c846c510151afa13ba2 \
--verbose
```

### Execute Scenarios

- Using "Scenarios" key  
In the API request, the user can include all parameters such as SUT, Fetch\_Log\_Upon\_Failure, and so on, under the "pageAndQuery" key. Scenarios can be specified in the request using the "otherBuildParameters" dictionary as follows:

```
"otherBuildParameters" : { "Scenarios" : "<Comma separated Scenarios List>" }
```

For example:

```
curl --request POST 10.75.217.25:30100/build \
-H "Content-Type: application/json" \
-d '{
  "pipelineName": "Policy-Regression",
  "pageAndQuery": "buildWithParameters",
  "otherBuildParameters": {
    "Scenarios":
      "Re_Import_YamlSchema_Verify_SMPolicy,AM_Terminate_Notify_Timeout,AM_Notify_With_Header_Timeout"
  }
}' \
--user policyapiuser:11c1a628f808972c846c510151afa13ba2 \
--verbose
```

- Using "Featuresandscenarios" key  
The API request allows the user to include all parameters such as SUT, Fetch\_Log\_Upon\_Failure, and so on, using the "pageAndQuery" key. Scenarios can be specified within the "otherBuildParameters" dictionary, as follows:

```
"otherBuildParameters" : { "Featuresandscenarios" : { "<Feature -1>" :
  "<Comma separated scenarios from Feature -1>" , "Feature -2" : "<Comma
  separated scenarios from Feature -2>" } }
```

For example:

```
curl --request POST 10.75.217.25:30100/build \
-H "Content-Type: application/json" \
```

```
-d '{
  "pipelineName": "Policy-Regression",
  "pageAndQuery": "buildWithParameters",
  "otherBuildParameters": {
    "Featuresandscenarios":{
      "YamlSchema_Import_Export" :
"Re_Import_YamlSchema_Verify_SMPolicy"
    }
  }
}' \
--user policyapiuser:11c1a628f808972c846c510151afa13ba2 \
--verbose
```

### Execute Stages

In the API request, the user can provide all parameters such as SUT, Fetch\_Log\_Upon\_Failure, etc., using the "pageAndQuery" key. Stages can be specified within the "otherBuildParameters" dictionary, as shown below:

```
"otherBuildParameters" : { "Stages" : "<Comma separated Stages list>" }
```

For example:

```
curl --request POST 10.75.217.25:30100/build \
-H "Content-Type: application/json" \
-d '{
  "pipelineName": "Policy-Regression",
  "pageAndQuery": "buildWithParameters?Configuration_Type=Custom_Config",
  "otherBuildParameters": {
    "Stages" : "stage2,stage4"
  }
}' \
--user policyapiuser:11c1a628f808972c846c510151afa13ba2 \
--verbose
```

### Execute Groups

In the API request, the user can include all parameters such as SUT, Fetch\_Log\_Upon\_Failure, and so on, under the "pageAndQuery" key. Groups can be specified within the "otherBuildParameters" dictionary, as follows:

```
"otherBuildParameters" : { "Groups" : { "<stage n>" : "<Comma
separated Groups List from stage n>", "<stage m>" : "<Comma separated
Group list from
stage m>" } }
```

For example:

```
curl --request POST 10.75.217.25:30100/build \
-H "Content-Type: application/json" \
-d '{
  "pipelineName": "Policy-Regression",
  "pageAndQuery": "buildWithParameters",
  "otherBuildParameters": {
    "Groups":{"stage1":"group1" , "stage2" : "group3,group6"}
  }
}' \
--user policyapiuser:11c1a628f808972c846c510151afa13ba2 \
--verbose
```

```

    }
  }' \
  --user policyapiuser:11c1a628f808972c846c510151afa13ba2 \
  --verbose

```

### Execute with Tags

In the API request, the user can specify all parameters such as SUT, Fetch\_Log\_Upon\_Failure, and so on, using the "pageAndQuery" key. When using tags, it is mandatory to include "FilterWithTags" in the "pageAndQuery". If tags are provided by the user, any other parameters such as features, scenarios, stages, or groups will not be considered. Only tags will be considered as input.

Tags can be specified in the request within the "otherBuildParameters" dictionary, as shown below:

```

"otherBuildParameters": {  "Feature_Include_Tags": "<tags>",
"Feature_Exclude_Tags": "<tags>", "Scenario_Include_Tags": "<Tags>" ,
"Scenario_Exclude_Tags": "<Tags>" }

```

#### Note

The provided tags must be separated by commas.

for example:

```

curl --request POST 10.75.217.25:30100/build \
-H "Content-Type: application/json" \
-d '{
  "pipelineName": "Policy-Regression",
  "pageAndQuery": "buildWithParameters",
  "otherBuildParameters": {
    "Feature_Include_Tags": "cne-common,cm-service",
    "Scenario_Include_Tags": "cleanup,sanity"
  }
}' \
--user policyapiuser:11c1a628f808972c846c510151afa13ba2 \
--verbose

```

#### Note

The API behaves in a manner similar to that of the UI. For instance, when running a set of scenarios, the user selects them, and only those chosen are executed upon triggering the build. If any stages, groups, or features are also selected in the features section, they are ignored. Similarly, if stages, groups, or features are included alongside scenarios in the API request, only the scenarios will be executed.

## 2.1.2.3 Monitoring Jobs

This Default Jenkins API is used to monitor the progress of the job that was started.

For monitoring, the following APIs are used:

- A `qid` is obtained from the Location header in the response for starting a job. The first API uses this `qid` to get queue status about the corresponding job, including its `job_id`.
- The second API uses the `job_id` to obtain further information about the job status.

### Monitoring a Job

To monitor jobs, run the following commands in a sequence:

1. `curl --request POST <Jenkins_host_port>/queue/item/<qid>/api/json --user <username>:<API_token> --verbose`

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST
      <Jenkins_host_port>/queue/item/<qid>/api/json --user
<username>:<API_token> --verbose --cacert
      <path_to_root_certificate>
```

For example,

```
curl --request POST http://10.123.154.163:30427/queue/item/5/api/json--
user policyapiuser:111ad02d7471cec9ca689696e9c7a55c62
      --verbose
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST https://10.75.217.25:30301/queue/item/27/api/json --user
      scpapiuser:11c2fde49cea6eb8f332ad23a7877ea2de --verbose --cacert
      caroot.cer
```

2. `curl --request POST <Jenkins_host_port>/job/<Pipeline_name>/<job_id>/api/json --user <username>:<API_token> --verbose`

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST
      <Jenkins_host_port>/job/<Pipeline_name>/<job_id>/api/json --user
<username>:<API_token> --verbose
      --cacert<path_to_root_certificate>
```

For example,

```
curl --request POST http://10.123.154.163:30427/job/Policy-
NewFeatures/3/api/json--user
policyapiuser:111ad02d7471cec9ca689696e9c7a55c62
      --verbose
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST https://10.75.217.25:30301/job/SCP-Regression/2/api/
json --user
      scpapiuser:11c2fde49cea6eb8f332ad23a7877ea2de --verbose --cacert
      caroot.cer
```

The following screenshot shows an example of monitoring the progress of the job:

### Figure 2-7 Monitoring a Job

```

root@blurr5-bastion-1 ~# curl --request POST http://10.123.154.163:30427/job/Policy-NewFeatures/3/api/json --user policyapiuser:11la0d2d7471cc9c9a689969e9c7a55c62 --verbose
* Using proxy env variable no_proxy == 'blurr5-bastion-1,blurr5-bastion-1,localhost,'
* Trying 10.123.154.163...
* TCP_NODELAY set
* Connected to 10.123.154.163 (10.123.154.163) port 30427 (#0)
* Server aut using Basic with user 'policyapiuser'
* POST /job/Policy-NewFeatures/3/api/json HTTP/1.1
* Host: 10.123.154.163:30427
* Authorization: Basic cG9saWNSYXpjdXNlcjoxMThZdApyZDc6NzFjZWMSY2E2ODk2OTZlOWM3YU1yYy
* User-Agent: curl/7.61.1
* Accept: */*
*
* HTTP/1.1 200 OK
* Date: Tue, 08 Nov 2022 10:08:29 GMT
* X-Content-Type-Options: nosniff
* X-Jenkins: 2.363
* X-Jenkins-Session: 7969f471
* X-Frame-Options: deny
* Content-Type: application/json;charset=utf-8
* Content-Length: 1875
* Server: Jetty(10.0.11)
{
  "class": "org.jenkinsci.plugins.workflow.job.WorkflowRun", "actions": [{"class": "hudson.model.ParametersAction", "parameters": [{"class": "hudson.model.StringParameterValue", "name": "...", "value": "..."}, {"class": "hudson.model.StringParameterValue", "name": "TestSuite", "value": "..."}, {"class": "hudson.model.StringParameterValue", "name": "SUT", "value": "PCF"}, {"class": "hudson.model.StringParameterValue", "name": "Configuration Type", "value": "Product Config"}, {"class": "hudson.model.StringParameterValue", "name": "Select Option", "value": "All"}, {"class": "hudson.model.StringParameterValue", "name": "Features", "value": "..."}, {"class": "hudson.model.StringParameterValue", "name": "TestCases", "value": "..."}, {"class": "hudson.model.StringParameterValue", "name": "Fetch Log Upon Failure", "value": "YES"}], {"class": "hudson.model.CauseAction", "causes": [{"class": "hudson.model.CauseUserIdCause", "shortDescription": "Started by user policyapiuser", "userId": "policyapiuser", "fullName": "policyapiuser"}], {"class": "org.jenkinsci.plugins.workflow.libs.LibraryConfiguration", "name": "10.123.154.163 left intact", "actions": [{"class": "org.jenkinsci.plugins.workflow.cps.EnvActionImpl", "(), (), ()", {"class": "org.jenkinsci.plugins.displayurlapi.actions.RunDisplayAction"}, {"class": "org.jenkinsci.plugins.pipeline.modeldefinition.actions.RestartDeclarativePipelineAction"}, {"(), (), ()", {"class": "org.jenkinsci.plugins.workflow.job.views.FlowGraphAction"}, {"(), (), {}}, {"artifacts": [], "building": true, "description": null, "displayName": "#3", "duration": 0, "estimatedDuration": 1, "executor": {"class": "hudson.model.OneOffExecutor"}, "fullDisplayName": "Policy-NewFeatures #3", "id": "#3", "keepLog": false, "number": 3, "queued": 5, "result": null, "timestamp": 1667981546337, "url": "http://10.123.154.163:30427/job/Policy-NewFeatures/3/", "changeSets": [], "culprits": [], "inProgress": true, "nextBuild": null, "previous": null}]}]}

```

#### 2.1.2.4 Stopping Jobs

Stop API is used to stop the currently running job using its `job_id`. It is also a default Jenkins API.

## Stopping a Job

For ATS without Parallel Test Execution framework integrated:

```
curl --request POST
      <Jenkins_host_port>/job/<Pipeline_name>/<job_id>/stop --user
<username>:<API_token>
      --verbose
```

When the `atsGuiTLSEnabled` parameter is set to `true`:

```
curl --request POST
      <Jenkins_host_port>/job/<Pipeline_name>/<job_id>/stop --user
<username>:<API_token> --verbose -cacert
      <path_to_root_certificate>
```

For example,

```
curl --request POST http://10.75.217.4:31881/job/UDR-Regression/21/stop --user udrapiuser:1139a72213e0a686972cbff4a2f9333a9f --verbose
```

When the `atsGuiTLSEnabled` parameter is set to `true`:

```
curl --request POST https://10.75.217.25:30301/job/SCP-Regression/2/stop --
user
scapiuser:11c2fde49cea6eb8f332ad23a7877ea2de --verbose --cacert
caroot.cer
```



**Note**

- If the rerun count is greater than zero, the job must be stopped twice.
- This Stop API call does not abort the build gracefully.

For ATS with Parallel Test Execution framework integrated:

```
curl --request POST
      <Stopjob_host_port>/job/<Pipeline_name>/<job_id>/stop --user
<username>:<API_token>
      --verbose
```

When the atsGuiTLSEnabled parameter is set to true:

```
curl --request POST
      <Stopjob_host_port>/job/<Pipeline_name>/<job_id>/stop --user
<username>:<API_token> --verbose --cacert
      <path_to_root_certificate>
```

For example.

```
curl --request POST http://10.75.217.4:32476/job/UDR-Regression/21/stop --user
      udrapiuser:1139a72213e0a686972cbff4a2f9333a9f --verbose
```

When the atsGuiTLSEnabled parameter is set to true:

```
curl --request POST https://10.75.217.25:30170/job/SCP-Regression/2/stop --
user
      scpapiuser:11c2fde49cea6eb8f332ad23a7877ea2de --verbose --cacert
      caroot.cer
```

The following table lists the parameter details for Stop API:

**Table 2-4 Stop API Details**

| Parameter         | Mandatory | Default Value | Description                                                                                                                                                                        |
|-------------------|-----------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| userName          | Yes       | NA            | Name of API user                                                                                                                                                                   |
| token             | Yes       | NA            | The API token for the API user                                                                                                                                                     |
| Stopjob_host_port | Yes       | NA            | Format is <host>:<port> <ul style="list-style-type: none"> <li>• &lt;host&gt; is same as Jenkins host</li> <li>• &lt;port&gt; is different such as 5001 or its nodeport</li> </ul> |
| pipelineName      | Yes       | NA            | Name of the pipeline for which build is to be stopped                                                                                                                              |

Table 2-4 (Cont.) Stop API Details

| Parameter | Mandatory | Default Value | Description                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------|-----------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| immediate | No        | False         | <p>To stop the build immediately, send a query parameter ("immediate=true") with API call.</p> <p>For example,</p> <pre>curl --request POST &lt;Stopjob_host_port&gt;/j ob/&lt;Pipeline_name&gt;/ &lt;job_id&gt;/stop? <b>immediate=true</b> --user &lt;username&gt;:&lt;API_token &gt; --verbose</pre> <ul style="list-style-type: none"> <li>immediate can also have values such as yes or 1. These values work similar to the true value.</li> </ul> |

### 2.1.2.5 Getting Test Suite Artifacts

Default Jenkins API is used to get the JUNIT-formatted XML test result files for a completed test suite.

For getting artifacts for any completed test suite, the following APIs are used:

- For getting an overall build summary
- For getting a JUNIT XML test result file for every feature file that ran

For getting an overall build summary:

```
curl --request POST <Jenkins_host_port>/job/<Pipeline_name>/<job_id>/
testReport/api/xml?exclude=testResult/suite --user <username>:<API_token> --
verbose
```

When the atsGuiTLSEnabled parameter is set to true:

```
curl --request POST
<Jenkins_host_port>/job/<Pipeline_name>/<job_id>/testReport/api/xml?
exclude=testResult/suite --user
<username>:<API_token> --verbose --cacert <path_to_root_certificate>
```

For example,

```
curl --request POST http://10.123.154.163:30427/job/Policy-NewFeatures/4/
testReport/api/xml?exclude=testResult/suite--user
policyapiuser:111ad02d7471cec9ca689696e9c7a55c62 --verbose
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST https://10.75.217.25:30301/job/SCP-Regression/1/
testReport/api/xml?exclude=testResult/suite
--user scpapiuser:11c2fde49cea6eb8f332ad23a7877ea2de --verbose --cacert
caroot.cer
```

For getting Feature-wise XML, `Select_Option = All`:

```
curl --request POST
<Jenkins_host_port>/job/<Pipeline_name>/<job_id>/artifact/test-results/
reports/*zip*/test-results.zip
--user <username>:<API_token> --verbose --output test-results.zip
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST
<Jenkins_host_port>/job/<Pipeline_name>/<job_id>/artifact/test-results/
reports/*zip*/test-results.zip
--user <username>:<API_token> --verbose --output test-results.zip --
cacert
<path_to_root_certificate>
```

For example,

```
curl --request POST http://
10.75.217.4:31881/job/Policy-NewFeatures/21/artifact/test-results/
reports/*zip*/test-results.zip --user
policyapiuser:11c3344996c4fda01ded2124bec4f9aa17
--verbose --output test-results.zip
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST https://10.75.217.25:30301/job/SCP-Regression/1/artifact/
test-results/reports/*zip*/test-results.zip
--user scpapiuser:11c2fde49cea6eb8f332ad23a7877ea2de --verbose --cacert
caroot.cer
```

For getting Feature-wise XML, `Select_Option = Single/MultipleFeatures`:

```
curl --request POST
<Jenkins_host_port>/job/<Pipeline_name>/<job_id>/artifact/test-results/
reports/
*.<Feature1_name>.xml,*.<Feature2_name>.xml/*zip*/test-results.zip --
user <username>:<API_token>
--verbose --output test-results.zip
```

When the `atsGuiTLSEnabled` parameter is set to true:

```
curl --request POST
<Jenkins_host_port>/job/<Pipeline_name>/<job_id>/artifact/test-results/
reports/
```

```
*.<Feature1_name>.xml,*.<Feature2_name>.xml/*zip*/test-results.zip --
user <username>:<API_token>
--verbose --output test-results.zip --cacert
<path_to_root_certificate>
```

For example,

```
curl --request POST http://
10.75.217.4:31881/job/Policy-NewFeatures/21/artifact/test-results/
reports/*.goldenfeature.xml,*.<AMPolicy.xml/*zip*/test-results.zip
--user policyapiuser:11c3344996c4fda01ded2124bec4f9aa17 --verbose --
output test-results.zip
```

When the `atsGuiTLSEnabled` parameter is set to `true`:

```
curl --request POST https://10.75.217.25:30301/job/SCP-Regression/1/artifact/
test-results/reports/*.SCP_Registration_With_PLMNList.xml/*zip*/test-
results.zip
--user scpapiuser:11c2fde49cea6eb8f332ad23a7877ea2de --verbose --cacert
caroot.cer
```

API calls for `Select_Option = All` and `Select_Option = Single/MultipleFeatures` return a zip file with JUNIT XMLs, one XML for each feature.

### Figure 2-8 Sample XML Output for AMPolicy.feature

```
<testsuite name="features.regression.templ.AMPolicy.AMPolicy.This feature is to refactor and/or redesign the Access and Mobility Management Service of PCF and to test Policy Establishment/Termination for AMF" tests="3" errors="0" failures="3" skipped="0" time="61.424786" timestamp="2022-03-24T07:11:12.693986" host name="ocsa-ocsa-policy-5366d44c-11c4"><properties><property name="vendor.name" value="Oracle" /><property name="vendor.product" value="Automated Test Suite" /></properties><testcase classname="features.regression.templ.AMPolicy.AMPolicy.This feature is to refactor and/or redesign the Access and Mobility Management Service of PCF and to test Policy Establishment/Termination for AMF" name="AM_Policy_Create_Query_User_Subscribe_True" status="failed" time="17.291319"><failure type="AssertionError" message="Maximum number of retries exhausted!!!">
<![CDATA[
Failing step: Then Cleanup before test run ... failed in 12.130s
location: features/regression/templ/AMPolicy/AMPolicy.feature:23
Assertion Failed: Maximum number of retries exhausted!!!
]]>
</failure>
</testcase>
</testsuite>
```

In the API call, specify other selected features in comma-separated form as /  
\*.<Feature1\_name>.xml,\*.<Feature2\_name>.xml,\*.<Feature3\_name>.xml,\*.<Feature4\_name>.xml/ for `Select_Option = Single/MultipleFeatures`.

The API call for getting the overall build summary returns an XML with values for duration, failCount, passCount, and skipCount for the current build.

### Figure 2-9 Sample Output

```
<?xml version="1.0" encoding="UTF-8" standalone="yes">
<testResult _class="hudson.tasks.junit.TestResult">
  <duration>61.424786</duration>
  <empty>false</empty>
  <failCount>12</failCount>
  <passCount>0</passCount>
  <skipCount>294</skipCount>
</testResult>
```

It is recommended to maintain a gap of at least a few seconds between two API calls. This gap depends on the time Jenkins takes to complete the API request.

## 2.2 ATS Feature Activation and Deactivation

ATS Feature Activation and Deactivation feature allows users to activate or deactivate specific features within the ATS using Helm charts.

### Note

Once these features are removed, they cannot be reinstated in the deployed ATS. However, users have the option to reinstall the ATS to restore the disabled features.

The following table lists the features to enable or disable using Helm charts.

### Note

These parameters can be edited in the ATS deployment file (`values.yaml`).

**Table 2-5 Enable or Disable ATS Feature**

| Features                                           | Parameter                          | Description                                                                                                                                                                                                                                     |
|----------------------------------------------------|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Support for Test Case Mapping and Count            | testCaseMapping                    | Set this parameter to <code>true</code> to activate the feature in the ATS GUI.                                                                                                                                                                 |
| Application Log Collection and PCAP Log Collection | logging                            | Set this parameter to <code>true</code> to collect the ATS logs. If the parameter is set to <code>false</code> , the logs will not be collected.                                                                                                |
| Lightweight Performance                            | lightWeightPerformance             | Set this parameter to <code>true</code> to activate the feature in the ATS GUI. If the parameter is set to <code>false</code> , the performance pipeline will not be accessible.                                                                |
| ATS Health Check                                   | healthcheck                        | Set this parameter to <code>true</code> to activate the feature in the ATS GUI. If the parameter is set to <code>false</code> , the health check pipeline will not be accessible.                                                               |
| ATS API                                            | atsApi                             | Set this parameter to <code>true</code> to activate the feature. If the parameter is set to <code>false</code> , the ATS API feature on the 5001 port will be disabled.                                                                         |
| Parameterization                                   | parameterization                   | Set this parameter to <code>true</code> to activate the feature in the ATS GUI. If the parameter is set to <code>false</code> , the <code>Configuration_Type</code> parameter on the GUI will not be available.                                 |
| Parallel Test Execution                            | parallelFrameworkChangesIntegrated | Set this parameter to <code>true</code> if all parallel test case execution features are picked by NF and changes are made to files.<br><b>Note:</b> Do not change the values provided in the <code>values.yaml</code> file for this parameter. |

Table 2-5 (Cont.) Enable or Disable ATS Feature

| Features                             | Parameter                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parallel Test Execution              | parallelTestCaseExecution     | Set this parameter to <code>true</code> to activate the feature in the ATS GUI. If set to <code>false</code> , all the features will be copied into a single stage or group, resulting in sequential execution.<br><b>Note:</b> It is not advisable to edit the default value given in the <code>values.yaml</code> file for this parameter.                                                                                                                                                                        |
| Parallel Test Execution              | mergedExecution               | Set this parameter to <code>true</code> to activate the feature in the ATS GUI. If set to <code>false</code> , the option to include other pipelines for <code>mergedExecution</code> will not be available.<br><b>Note:</b> It is not advisable to edit the default value given in the <code>values.yaml</code> file for this parameter.                                                                                                                                                                           |
| ATS Support to Execute Scenarios     | scenarioSelection             | Set this parameter to <code>true</code> to activate the feature in the ATS GUI. If set to <code>false</code> , the ability to select single or multiple scenarios will be removed. It is dependent on the <code>testCaseMapping</code> parameter. If this parameter is set to <code>false</code> , the <code>scenarioSelection</code> parameter will be set to <code>false</code> too.<br><b>Note:</b> It is not advisable to edit the default value given in the <code>values.yaml</code> file for this parameter. |
| ATS Tagging Support                  | executionWithTagging          | Set this parameter to <code>true</code> to activate the feature in the ATS GUI. If set to <code>false</code> , the ability to execute test cases based on tags will be removed. It is dependent on the <code>testCaseMapping</code> parameter. If this parameter is set to <code>false</code> , the <code>executionWithTagging</code> parameter will be set to <code>false</code> too.                                                                                                                              |
| Stage or Group Level Execution       | individualStageGroupSelection | Set this parameter to <code>true</code> to activate the feature in the ATS GUI. If set to <code>false</code> , the ability to select all test cases from individual stages or groups using a single checkbox will be removed.<br><b>Note:</b> It is not advisable to edit the default value given in the <code>values.yaml</code> file for this parameter.                                                                                                                                                          |
| Support for Transport Layer Security | atsGUI TLS Enabled            | Set this parameter to <code>true</code> to activate the feature in the ATS GUI. If set to <code>false</code> , ATS will work in HTTP mode.                                                                                                                                                                                                                                                                                                                                                                          |

**Note**

- You can edit the parameters relating to the features that NF supports. Keep the default value for the remaining parameters.
- For the current release, mergedExecution, individualStageGroupSelection, and parallelTestCaseExecution parameters value should not be modified.

## 2.3 ATS GUI Enhancements

With this enhancement, the ATS Graphical User Interface (GUI) layout is redesigned to streamline user interaction by segregating execution options and features or test cases into distinct compartments, allowing the users to navigate effortlessly between different functionalities.

**Figure 2-10 Layout Enhancement**

### Pipeline UDR-Regression

This build requires parameters:

The screenshot displays the Oracle Communications Cloud Native Core Automated Test Suite - UDR GUI. The interface is divided into two main sections: EXECUTION OPTIONS and FEATURES AND TESTCASES.

**EXECUTION OPTIONS**


|                           |                              |                            |                                      |
|---------------------------|------------------------------|----------------------------|--------------------------------------|
| TestSuite<br>Regression   | SUT<br>UDR                   | SUTSuite<br>All            | Configuration_Type<br>Product_Config |
| Include_NewFeatures<br>NO | Fetch_Log_Upon_Failure<br>NO | Log_Type<br>Not Applicable | Log_Level<br>Not_Applicable          |

**FEATURES AND TESTCASES**

|                  |
|------------------|
| Features<br>All  |
| TestCases<br>All |

At the bottom, there are two buttons: Build and Cancel.

Test cases now feature a display of fixed length, ensuring that even lengthier test cases remain visually manageable. Additionally, the inclusion of hover-scroll functionality allows for easy access to content beyond the visible area, enhancing readability and user friendliness.

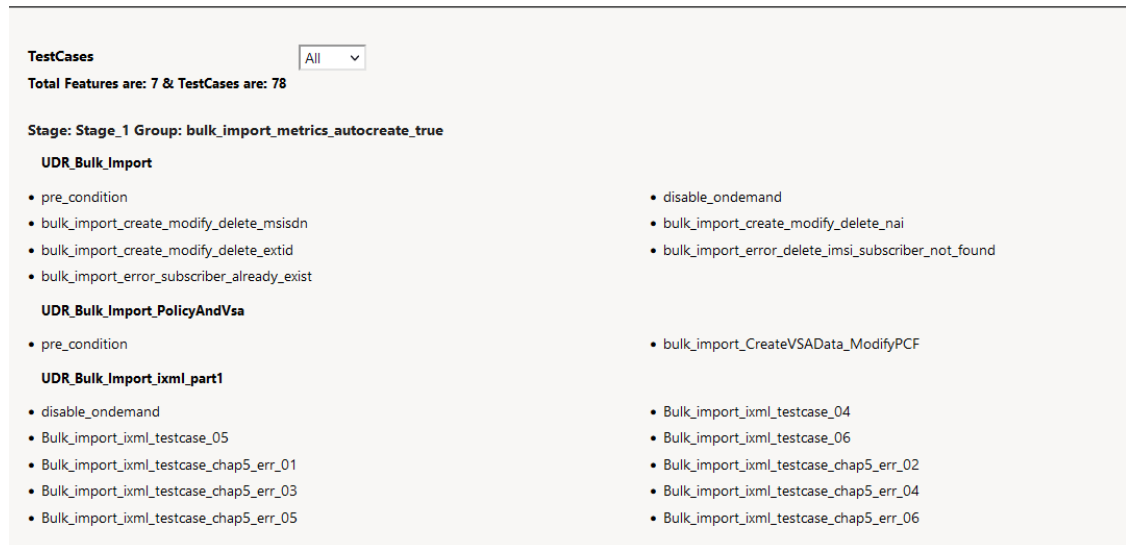**Figure 2-11 Test Cases Visibility**

Tooltips have been introduced to allow user to have quick insights into the grouping and staging of individual test cases, thereby improving overall understanding and navigation within the ATS environment.

**Figure 2-12 Tooltips**

To facilitate the use of multiselect features and scenarios, distinct drop down menus have been introduced. This enables users to efficiently choose and manage multiple options simultaneously, thereby improving flexibility and productivity in selecting test cases.



**Figure 2-13 Multiselect Features and Scenarios**

The screenshot displays a web interface titled "FEATURES AND TESTCASES". It is divided into two main sections: "Features" and "TestCases".

**Features Section:**

- A "Select" dropdown menu is at the top.
- Group: bulk\_import\_metrics\_autocreate\_true**
  - ☐ UDR\_Bulk\_Import
  - ☐ UDR\_Bulk\_Import\_ixml\_part1
  - ☐ UDR\_Bulk\_Import\_PolicyAndVsa
- Stage: Stage\_2**
  - Group: bulk\_import\_autocreate\_false**
    - ☒ UDR\_Bulk\_Import\_ixml\_part2
- Stage: Stage\_4**
  - Group: sequential\_execution**
    - ☐ UDR\_Bulk\_Import\_All\_metrics
    - ☐ UDR\_Bulk\_Import\_ixml\_bug\_fixes
    - ☐ UDR\_Bulk\_Import\_VSA

**TestCases Section:**

- A "Select" dropdown menu is at the top.
- Total Test Cases are : 25**
- Stage: Stage\_2 Group: bulk\_import\_autocreate\_false**
  - UDR\_Bulk\_Import\_ixml\_part2**
    - ☐ disable\_ondemand
    - ☐ Bulk\_import\_ixml\_testcase\_chap7\_09
    - ☐ Bulk\_import\_ixml\_testcase\_chap7\_11
    - ☐ Bulk\_import\_ixml\_testcase\_chap7\_13
    - ☐ Bulk\_import\_ixml\_testcase\_chap7\_08
    - ☐ Bulk\_import\_ixml\_testcase\_chap7\_10
    - ☐ Bulk\_import\_ixml\_testcase\_chap7\_12
    - ☐ Bulk\_import\_ixml\_testcase\_chap7\_14

At the bottom, there are two buttons: "Build" (with a play icon) and "Cancel".

## 2.4 ATS Health Check

ATS Health Check functionality is to check the health of the System Under Test (SUT)

Earlier, ATS used Helm test functionality to check the health of the System Under Test (SUT). With the implementation of the ATS Health Check pipeline, the SUT health check process has been automated. ATS health checks can be performed on webscale and non-webscale environments.

### Convert a Value in Base64

The following command can be utilized to convert any value into base64 encoding:

```
echo-n "value" | base64
```

For example,

```
echo-n "126.98.76.43" | base64
```

### Deploying ATS Health Check in a Webscale Environment

- Set the Webscale to 'true' and the following parameters by encoding them with [base64](#) in the ATS values.yaml file:
- Set the following parameter to encrypted data:

```
webscalejumpserverip: encrypted-data
webscalejumpserverusername: encrypted-data
```

```
webscalejumpserverpassword: encrypted-data  
webscaleprojectname: encrypted-data  
webscalelabserverFQDN: encrypted-data  
webscalelabserverport: encrypted-data  
webscalelabserverusername: encrypted-data  
webscalelabserverpassword: encrypted-data
```

Encrypted data is the value of parameters encrypted in base64. Fundamentally, Base64 is used to encode the parameters.

For example:

```
webscalejumpserverip=$(echo -n '10.75.217.42' | base64), Where Webscale Jump  
server ip needs to be provided  
webscalejumpserverusername=$(echo -n 'cloud-user' | base64), Where Webscale  
Jump server Username needs to be provided  
webscalejumpserverpassword=$(echo -n '*****' | base64), Where Webscale Jump  
server Password needs to be provided  
webscaleprojectname=$(echo -n '*****' | base64), Where Webscale Project Name  
needs to be provided  
webscalelabserverFQDN=$(echo -n '*****' | base64), Where Webscale Lab Server  
FQDN needs to be provided  
webscalelabserverport=$(echo -n '*****' | base64), Where Webscale Lab Server  
Portneeds to be provided  
webscalelabserverusername=$(echo -n '*****' | base64), Where Webscale Lab  
Server Username needs to be provided  
webscalelabserverpassword=$(echo -n '*****' | base64), Where Webscale Lab  
Server Password needs to be provided
```


### Running ATS Health Check Pipeline in an Webscale Environment

To run ATS Health Check pipeline:

1. Log in to ATS using respective <NF> login credentials.
2. Click <NF>HealthCheck pipeline and then click **Configure**.

#### Note

<NF> denotes the network function. For example, in Policy, it is called as Policy-HealthCheck pipeline.

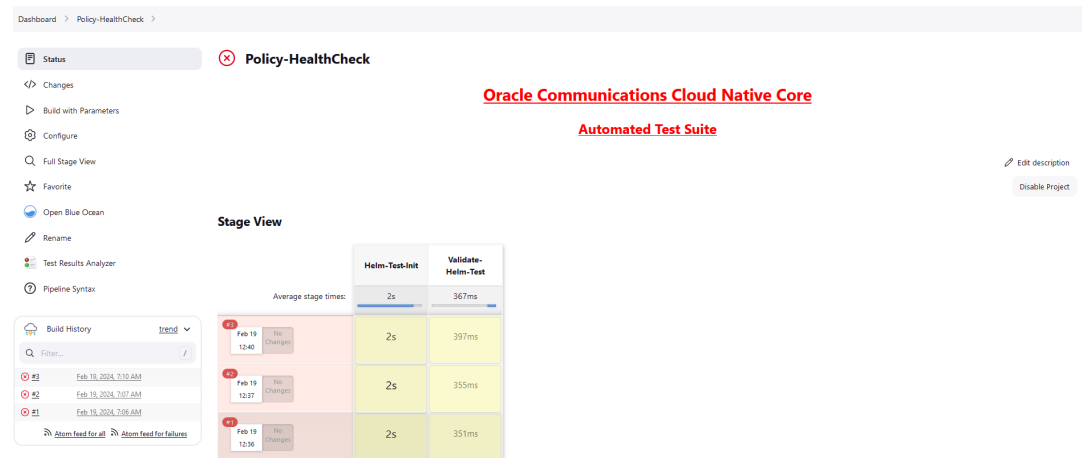**Figure 2-14 Configure Healthcheck**

- Provide parameter a with Helm release name deployed. If there are multiple releases, use comma to provide all Helm release names.

//a = helm releases [Provide Release Name with Comma Separated if more than 1 ]

Provide parameter c with the appropriate Helm command, such as helm, helm3, or helm2.

//c = helm command name [helm or helm2 or helm3]

Figure 2-15 Save the Changes

Pipeline script

Script ?


```
1 node{
2   def myVar = 'initial_value'
3   def buildVar = 'initial_value'
4   properties(
5     [
6       parameters(
7         [string(defaultValue: '', name: 'Helm_releases',description: "Provide Rel
8           string(defaultValue: '', name: 'Namespace', description: "Provide the nan
9         )
10      ]
11    )
12  )
13  stage('Helm-Test-Init') {
14    catchError(buildResult: 'SUCCESS', stageResult: 'UNSTABLE') {
15
16      //a = helm releases [Provide Release Name with Comma Seperated if more than 1 ]
17      //b= Namespace, If not applicable then remove the argument
18      //c= helm command name [helm or helm2 or helm3]
```

☒ Use Groovy Sandbox ?

[Pipeline Syntax](#)

**Save** Apply

4. Save the changes and click **Build Now**. ATS runs the health check on respective network function.

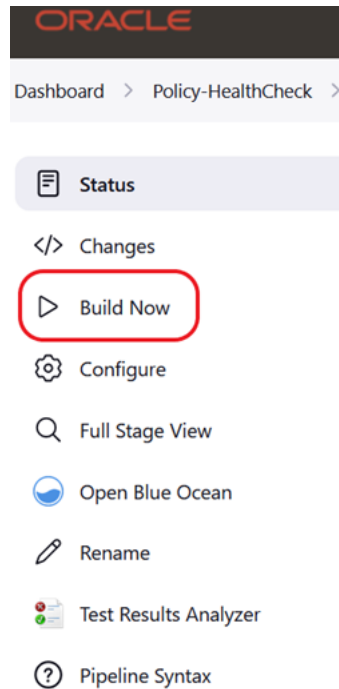**Figure 2-16 Build Now**

### Deploying ATS Health Check Pipeline in an OCI Environment

To use a ssh private key, create healthcheck-oci-secret and set the value of the key "passwordAuthenticationEnabled" to false.

#### Creating healthcheck-oci-secret

Create healthcheck-oci-secret to use ssh private keys instead of passwords using the following command:

```
kubectl create secret generic healthcheck-oci-secret --from-  
file=bastion_key_file='<path of bastion ssh private key file>' --from-  
file=operator_instance_key_file='<path of operator instance ssh private key  
file>' -n <ATS namespace>
```

For example,

```
kubectl create secret generic healthcheck-oci-secret --from-  
file=bastion_key_file='/tmp/bastion_private_key' --from-  
file=operator_instance_key_file='/tmp/operator_instance_private_key' -n  
seppsvc
```

**Note**

- Maintain the name of the secret as "healthcheck-oci-secret".
- Ensure that the '--from-file' keys retain the same names: "bastion\_key\_file" and "operator\_instance\_key\_file".
- If the SSH private key is identical for both the bastion and operator instance, you can use the same path for both in the secret creation command.

Perform the following procedure to deploy ATS Health Check in a OCI environment:

Set the webscale parameter set to 'false' and following parameters by encoding it with [base64](#) in the ATS values.yaml file.

- To use password, provide [base64](#) encoded values for key "password" for both bastion and operator instances, and set the value of key **passwordAuthenticationEnabled** to "true".
- Set the following parameter to encrypted data:

```
envtype: encrypted-data
ociHealthCheck:
  passwordAuthenticationEnabled: true or false
  bastion:
    ip: encrypted-data
    username: encrypted-data
    password: encrypted-data
  operatorInstance:
    ip: encrypted-data
    username: encrypted-data
    password: encrypted-data
```

**Note**

All fields are mandatory except for passwords. When the "passwordAuthenticationEnabled" field is set to true, only the "password" field needs to be updated; otherwise, it can remain with its default value.


**Running ATS Health Check Pipeline in an OCI Environment**

To run ATS Health Check pipeline:

1. Log in to ATS using respective <NF> login credentials.
2. Click <NF>HealthCheck pipeline and then click **Configure**.

**Note**

<NF> denotes the network function. For example, in Policy, it is called as Policy-HealthCheck pipeline.

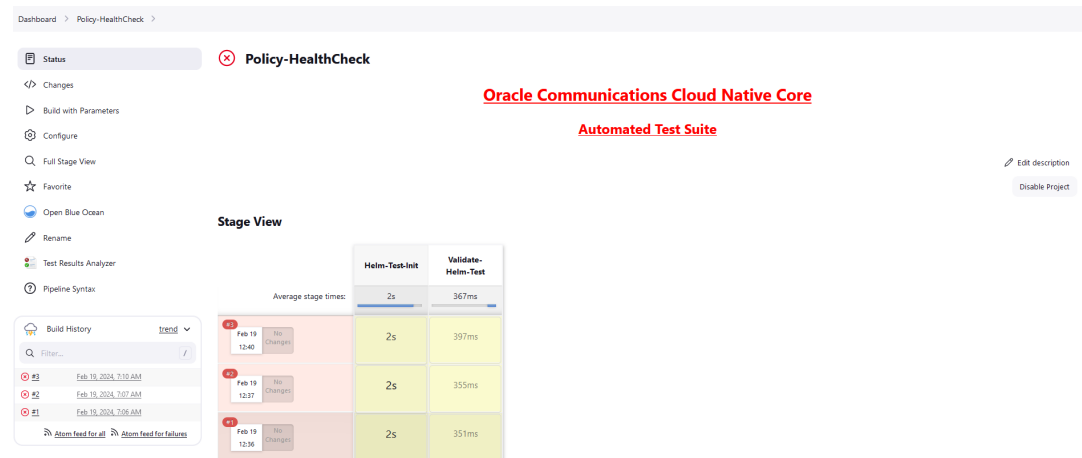**Figure 2-17 Configure Healthcheck**

- Provide parameter a with Helm release name deployed. If there are multiple releases, use comma to provide all Helm release names.

//a = helm releases [Provide Release Name with Comma Separated if more than 1 ]

Provide parameter c with the appropriate Helm command, such as helm, helm3, or helm2.

//c = helm command name [helm or helm2 or helm3]

**Figure 2-18 Save the Changes**

Pipeline script

Script ?

```
1 node{
2   def myVar = 'initial_value'
3   def buildVar = 'initial_value'
4   properties(
5     [
6       parameters(
7         [string(defaultValue: '', name: 'Helm_releases',description: "Provide Rel
8           string(defaultValue: '', name: 'Namespace', description: "Provide the nan
9         )
10      ]
11    )
12  )
13  stage('Helm-Test-Init') {
14    catchError(buildResult: 'SUCCESS', stageResult: 'UNSTABLE') {
15
16      //a = helm releases [Provide Release Name with Comma Seperated if more than 1 ]
17      //b= Namespace, If not applicable then remove the argument
18      //c= helm command name [helm or helm2 or helm3]
```

☒ Use Groovy Sandbox ?


[Pipeline Syntax](#)

Save

Apply

4. Save the changes and click **Build Now**. ATS runs the health check on respective network function.

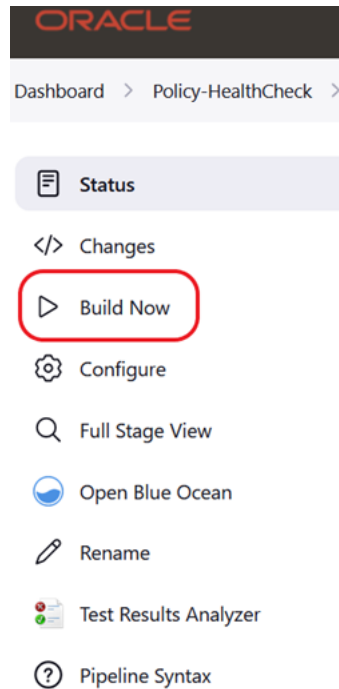

**Figure 2-19 Build Now**

### Deploying ATS Health Check in a Non-Webscale or Non-OCI Environment

Perform the following procedure to deploy ATS Health Check in a non-webscale or non-OCI environment such as OCCNE:

Set the Webscale parameter set to 'false' and following parameters by encoding it with [base64](#) in the ATS values.yaml file:

```
occnehostip: encrypted-data
occnehostusername: encrypted-data
occnehostpassword: encrypted-data
```

Example:

```
occnehostip=$(echo -n '10.75.217.42' | base64) , Where occne host ip needs to
be provided
occnehostusername=$(echo -n 'cloud-user' | base64), Where occne host username
needs to be provided
occnehostpassword=$(echo -n '*****' | base64), Where password of host needs to
be provided
```

### Running ATS Health Check Pipeline in a Non-Webscale or Non-OCI Environment

Perform the following procedure to run the ATS Health Check pipeline in a non-webscale or non-OCI environment such as OCCNE:

1. Log in to ATS using respective <NF> login credentials.
2. Click <NF>HealthCheck pipeline and then click **Configure**.
3. Provide parameter a with Helm release name deployed. If there are multiple releases, use comma to provide all Helm release names.

Provide parameter b with SUT deployed namespace name.

Provide parameter c with the appropriate Helm command, such as helm, helm3, or helm2.

```
//a = helm releases [Provide Release Name with Comma Separated if more
than 1 ]
//b = Namespace, If not applicable to WEBSCALE environment then remove the
argument
//c = helm command name [helm or helm2 or helm3]
```

**Figure 2-20 Save the Changes**

Pipeline script

Script
?

```

1 node{
2     def myVar = 'initial_value'
3     def buildVar = 'initial_value'
4     properties(
5         [
6             parameters(
7                 [string(defaultValue: '', name: 'Helm_releases',description: "Provide Re]
8                 string(defaultValue: '', name: 'Namespace', description: "Provide the nan
9             )
10        ]
11    )
12    stage('Helm-Test-Init') {
13        catchError(buildResult: 'SUCCESS', stageResult: 'UNSTABLE') {
14
15            //a = helm releases [Provide Release Name with Comma Separated if more than 1 ]
16            //b= Namespace, If not applicable then remove the argument
17            //c= helm command name [helm or helm2 or helm3]
18        }
19    }
20 }
```


☒ Use Groovy Sandbox ?

[Pipeline Syntax](#)

Save

Apply

4. Save the changes and click **Build Now**. ATS runs the health check on respective network function.

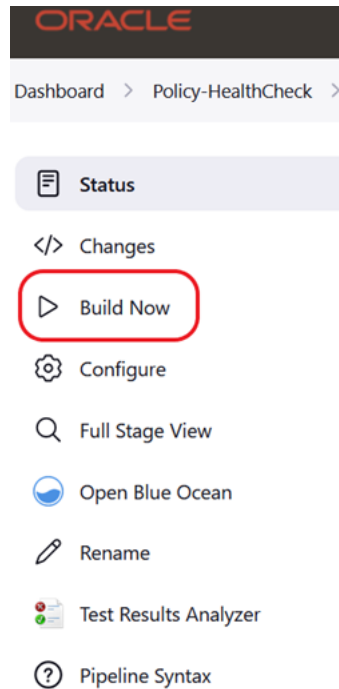**Figure 2-21 Build Now**


By clicking **Build Now**, you can run the health check on ATS and store the result in the console logs.

## 2.5 ATS Jenkins Job Queue

The ATS Jenkins Job Queue feature places the second job in a queue if the current job is already running from the same or different pipelines to prevent jobs from running in parallel to one another.

Job/build queue status can be viewed in the left navigation pane on the ATS home page. The following image shows the build queue status when a user has tried to run the NewFeatures pipeline when the Regression pipeline is already running.

Figure 2-22 Build Executor Status

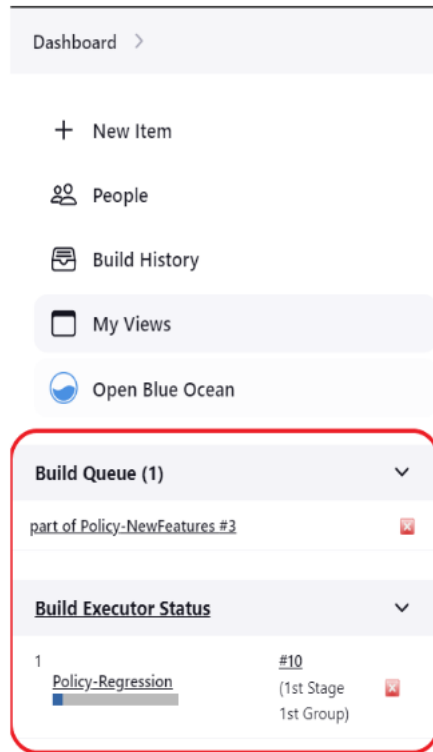

## 2.6 Application Log Collection

Using Application Log Collection, you can debug a failed test case by collecting the application logs for NF System Under Test (SUT). Application logs are collected for the duration that the failed test case was run.

Application Log Collection can be implemented by using ElasticSearch or Kubernetes Logs. In both these implementations, logs are collected per scenario for the failed scenarios.

### Application Log Collection Using ElasticSearch

To access the option to collect logs using ElasticSearch:

1. Log in to ATS using respective <NF> login credentials.
2. On the NF home page, click any new feature or regression pipeline, from where you want to collect the logs.
3. In the left navigation pane, click **Build with Parameters**.
4. Select YES or NO from the drop-down menu of **Fetch\_Log\_Upon\_Failure** to select whether the log collection is required for a particular run.

**Figure 2-23 Fetch\_Log\_Upon\_Failure**

The screenshot shows the 'EXECUTION OPTIONS' section of the ATSS configuration page. The 'Fetch\_Log\_Upon\_Failure' option is highlighted with a red box and set to 'YES'. Other visible options include 'TestSuite' (Regression), 'Execute\_Suite' (R15), 'Configuration\_Type' (Product\_Config), 'FilterWithTags' (NO), 'Include\_NewFeatures' (NO), 'Log\_Type' (AppLog), 'Log\_Level' (DEFAULT), and 'HTTPX\_LOG\_LEVEL' (Disabled). The 'FEATURES AND TESTCASES' section shows 'Features' and 'TestCases' both set to 'All'.

5. If option **Log\_Type** is also available, select value **AppLog** for it.
6. Select the Log Level from the drop-down menu of Log\_Level to set the log level for all the microservices. The possible values for Log\_Level are as follows:
  - **WARN:** Designates potentially harmful situations.
  - **INFO:** Designates informational messages that highlight the progress of the application at coarse-grained level.
  - **DEBUG:** Designates fine-grained informational events that are most useful to debug an application.
  - **ERROR:** Designates error events that might still allow the application to continue running.
  - **TRACE:** The TRACE log level captures all the details about the behavior of the application. It is mostly diagnostic and is more granular and finer than DEBUG log level.

**Note**

Log\_Level values are NF dependent.

7. After the build execution is complete, go into the ATS pod, then navigate to following path to find the applogs: `.jenkins/jobs/<Pipeline Name>/builds/<build number>/`  
For example, `.jenkins/jobs/SCP-Regression/builds/5/`  
Applogs is present in zip form. Unzip it to get the log files.

The following tasks are carried out in the background to collect logs:

- ElasticSearch API is used to access and fetch logs.
- Logs are fetched from ElasticSearch for the failed scenarios
- Hooks (after scenario) within the cleanup file initiate an API call to Elasticsearch to fetch Application logs.
- Duration of the failed scenario is calculated based on the time stamp and passed as a parameter to fetch the logs from ElasticSearch.
- Filtered query is used to fetch the records based on Pod name, Service name, and timestamp (Failed Scenario Duration).

- For ElasticSearch, there is no rollover or rotation of logs over time.
- The maximum records that the ElasticSearch API can fetch per microservice in a failed scenario is limited to 10K.
- The following configuration parameters are used for collecting logs using Elastic Search:
  - ELK\_WAIT\_TIME: Wait time to connect to Elastic Search
  - ELK\_HOST: Elastic Search HostName
  - ELK\_PORT: Elastic Search Port

### Application Log Collection Using Kubernetes Logs

To access the option to collect logs using Kubernetes Logs:

1. On the NF home page, click any new feature or regression pipeline, from where you want to collect the logs.
2. In the left navigation pane, click **Build with Parameters**.
3. Select YES or NO from the drop-down menu of **Fetch\_Log\_Upon\_Failure** to select whether the log collection is required for a particular run.
4. Select the Log Level from the drop-down menu of Log\_Level to set the log level for all the microservices. The possible values for Log\_Level are as follows:
  - WARN: Designates potentially harmful situations.
  - INFO: Designates informational messages that highlight the progress of the application at coarse-grained level.
  - DEBUG: Designates fine-grained informational events that are most useful to debug an application.
  - ERROR: Designates error events that might still allow the application to continue running.

#### Note

Log\_Level values are NF dependent.

The following tasks are carried out in the background to collect logs:

- Kube API is used to access and fetch logs.
- For failed scenarios, logs are directly fetched from microservices.
- Hooks (after scenario) within the cleanup file initiate an API call to Elasticsearch to fetch Application logs.
- The duration of the failed scenario is calculated based on the time stamp and passed as a parameter to fetch the logs from microservices.
- Logs roll can occur while fetching the logs for a failed scenario. The maximum loss of logs is confined to a single scenario.

## 2.6.1 Application Log Collection and Parallel Test Execution Integration

A new stage, "Logging/Rerun", has been added at the end of the Execute-Tests stage to collect rerun logs, such as applog and PCAP logs, by running the failed test cases in a sequence.

**Figure 2-24 Logging/Rerun new stage****Stage View**

|                                                       | Preparation | Execute-Tests | 1st Stage | 1st Stage 1st Group | 1st Stage 2nd Group | 1st Stage 3rd Group | 2nd Stage | 2nd Stage 1st Group | 2nd Stage 2nd Group | 3rd Stage | 3rd Stage 1st Group | Logging / Rerun | Archive logs | Consolidated Output | Declarative: Post Actions |
|-------------------------------------------------------|-------------|---------------|-----------|---------------------|---------------------|---------------------|-----------|---------------------|---------------------|-----------|---------------------|-----------------|--------------|---------------------|---------------------------|
| Average stage times:<br>(Average full run time: ~54s) | 5s          | 59ms          | 1s        | 31s                 | 2s                  | 26s                 | 1s        | 999ms               | 1s                  | 1s        | 997ms               | 33s             | 487ms        | 2s                  | 6s                        |
| 992<br>Feb 07 14:10<br>No Changes                     | 5s          | 46ms          | 1s        | 1s                  | 1s                  | 27s                 | 1s        | 1s                  | 1s                  | 1s        | 887ms               | 2s              | 580ms        | 2s                  | 5s                        |

If the `Fetch_Log_Upon_Failure` parameter is set to YES and if any test case fails in the initial run, then:

- The failed test case reruns and log collection start in the Logging/Rerun stage after the initial run is completed for all the test cases.
- The logs from the initial execution are collected, but they might be incorrect.
- Even if the rerun parameter is set to 0, the failed test case reruns in the Logging/Rerun stage and the log is collected.

**Note**

Not applicable for all the NFs.

- If the `Fetch_Log_Upon_Failure` parameter is set to NO and if any test case fails in the initial run, then the failed test case rerun starts in the same stage after the initial execution is over for all the test cases in its group.

## 2.7 ATS Maintenance Scripts

ATS maintenance scripts are used to perform the following operations:

- Taking a backup of the ATS custom folders and Jenkins pipeline.
- Viewing the configuration and restoring the Jenkins pipeline.
- Viewing the configuration and installing or uninstalling ATS and stubs.

ATS maintenance scripts are present in the ATS image at the following path: `/var/lib/jenkins/ocats_maint_scripts`

Run the following command to copy the scripts to a local system (bastion):

```
kubectl cp <NAMESPACE>/<POD_NAME>:/var/lib/jenkins/ocats_maint_scripts
<DESTINATION_PATH_ON_BASTION> pod
```

For example,

```
kubectl cp ocpcf/ocats-ocats-policy-694c589664-js267:/var/lib/Jenkins/
ocats_maint_scripts /home/meta-user/ocats_maint_scripts pod
```

## 2.7.1 ATS Scripts

ATS maintenance scripts are used to perform various task related to ATS and Jenkin pipeline.

The following are the types of scripts:

- **ats\_backup.sh**: This script requires the user's input and takes a backup of the ATS custom folders, Jenkins jobs, and user's folders on the user's system. The backup can be of the Jenkins jobs and user's folder, the custom folders, or both. The custom folders include `cust_regression`, `cust_newfeatures`, `cust_performance`, `cust_data`, and `custom_config`. For a Jenkins job or a user's folder, the script only takes a backup of the `config.xml` file. Also, the script requires the user to store a backup on the user's system (the default path is the location from where the script is being run) and to create a backup folder on the system and take the backup of the chosen folder from the corresponding ATS into the backup folder. The backup folder name can be of the following notation: `ats_<version>_backup_<date>_<time>`.
- **ats\_uninstall.sh**: This script requires the user's input and uninstalls the corresponding ATS.
- **ats\_install.sh**: This script requires the user's input and installs a new ATS. If `PVEnabled` is set to `true`, the script also reads the PVC name from `values.yaml` and creates `values.yaml` before installation. Also, if needed, the script performs the postinstallation steps, such as copying tests and Jenkins jobs' folders from the `ats_data` tar file to the ATS pod when PV is deployed, and then restarts the pod.
- **ats\_restore.sh**: This script requires the user's inputs, restores the new release ATS pipeline, and views the configuration by referring to the last release ATS Jenkins jobs and the user's configuration. It depends on the user whether to use the backup folders from the user's system to restore the ATS configuration. If the user instructs the script to use the backup from the system, the script requires the path of the backup and uses the backup to restore. Otherwise, the script requires the last ATS Helm release name to refer to its Jenkins jobs and the user's configuration to restore.  
The script refers to the last release of ATS Jenkins pipelines and sets the `Discard old builds` property if this property is set in the last release of ATS for a pipeline but not in the current release. If this property is set in both releases, the script just updates the values according to the last release. Also, the script restores the `pipeline environment variables` values as per the last release of ATS. If any custom pipeline (created by the user) was present in the last release of ATS, the script restores that as well. It also restores the extra views created by NF users, for example, policy users, SCP users, and NRF users. Moreover, the script displays messages about the pending configuration that the user needs to perform manually. For example, a new pipeline or a new environment variable (for a pipeline) is introduced in the new release.

While deploying ATS without PV, Jenkins needs to be restarted for the restore process to complete. If the last release ATS contains the `Configuration_Type` parameter, the `Configuration_Type` script needs to be approved with the **In Process Script Approval** setting under **Manage ATS** in Jenkins for the restore process to complete.



## 2.7.2 Updating ats\_install.sh

Currently, the `ats_install.sh` script copies the tests folder and Jenkins jobs folder into the ATS pod and then restarts the pod when deployed with PV.

### How to Update ats\_install.sh

Other NFs can also use the `ats_install.sh` scripts. However, additional post installation steps may have to be performed manually for a few NFs.

For the additional post installation commands, perform the following steps:

1. In the `ats_install.sh` script, there is a post install section between `#####POST_INSTALL_START#####` and `##### POST_INSTALL_END #####`.
  - a. Add the required post install commands.

#### Note

These commands are NF-specific.


- b. Use the following commands:
    - `$namespace` for the namespace value
    - `$pod_name` for the pod name
    - `$ats_data_path` for the `ats_data` folder path (it has tests folder and Jenkins jobs folder provided as tar file in ATS package)
  - c. In the if-else block related to whether PV is enabled or not, add the following:
    - Add a command specific to `PVEnabled=true` in the `if` block.
    - Add a command specific to `PVEnabled=false` in the `else` block.
2. For additional inputs, enter the required code between `##### INPUT_START #####` and `##### INPUT_END #####`.

## 2.7.3 Restarting Jenkins without Restarting Pod


Perform the following procedure to restart Jenkins without restarting pods:

1. Log in as the Jenkins admin.
2. Go to the `<Jenkins_IP>:<port>/safeRestart`, for example, `10.87.73.32:32156/safeRestart`.

**Figure 2-25 Safe Restart**



3. Click **Yes**.

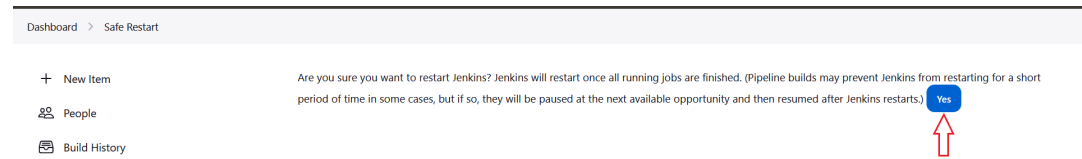**Figure 2-26 Restart Jenkins**

## 2.7.4 Updating Stub Scripts

The following stubs can be updated:

- **stub\_uninstall.sh**: This script requires the user's inputs and uninstalls all the stubs.
- **stub\_install.sh**: This script requires the user's inputs and installs all the stubs.

### Note

Currently, `stub_uninstall.sh` and `stub_install.sh` work.

Perform the following procedure to update the stub scripts for other NFs (NRF in this case):

1. Go to the stub folder.
2. From each script:
  - a. Remove the CNC Policy-specific stubs inputs (dns, amf, and ldap), and add the input code blocks for NRF-specific stubs.
  - b. For the stubs to uninstall, change the value of the `stubUninstallList` variable, and delete the variables for the CNC Policy-specific stubs below it.

### Note

`stubUninstallList` contains the Helm release names of the common stubs that are deployed generally.

- c. Declare the variables for the NRF-specific stubs below the `stubUninstallList` line.
- d. Remove the Helm uninstallation commands of the policy-specific stubs, and add the Helm uninstallation commands of the NRF-specific stubs.
- e. For the stubs to install, change the value of the `stubInstallList` variable, and delete the variables for the CNC Policy-specific stubs below it.

### Note

`stubInstallList` contains the Helm release names of the common stubs that are deployed generally.

- f. Declare the variables for the NRF-specific stubs below the `stubInstallList` line.
- g. Remove the Helm installation commands of the CNC Policy-specific stubs, and add the Helm installation commands of the NRF-specific stubs.

## 2.7.5 Running ATS and Stub Deployment Scripts

Perform the following procedure to run ATS and stub deployment scripts:

### ① Note

If you want to take a backup of the custom folders or Jenkins jobs and user's configuration or both, run the `ats_backup.sh` script.

1. Run the `ats_install.sh` script to install the new release ATS (values.yaml of the ATS Helm chart must be updated before this step).
2. Run the `ats_restore.sh` script to restore the new ATS pipeline and view configuration.

### ① Note

- You might perform the manual steps required for the restore script.
- You must copy all the necessary changes to the new release ATS from the last release ATS. To get the changes in the last release, you must refer to the custom folders in the last release ATS backup on the system with an existing backup using `ats_backup.sh` before this step.
- You can remove the last release ATS pod using the `ats_uninstall.sh` script while continuing to retain the last release PVC. You can use the last release PVC to port backward. Delete the last release PVC when you do not require the backward porting.

3. Run the `stub_install.sh` script to install all the new release stubs values.yaml of the stub Helm charts must be updated before this step.
4. Run the `stub_uninstall.sh` script to uninstall all the last release stubs.


## 2.8 ATS System Name and Version Display on the ATS GUI

This feature displays the ATS system name and version on the ATS GUI.

You can log in to the ATS application using the login credentials to view the following:

- ATS system name: Abbreviated product name followed by NF name.
- ATS Version: Release version of ATS.

Figure 2-27 ATS System Name and Version

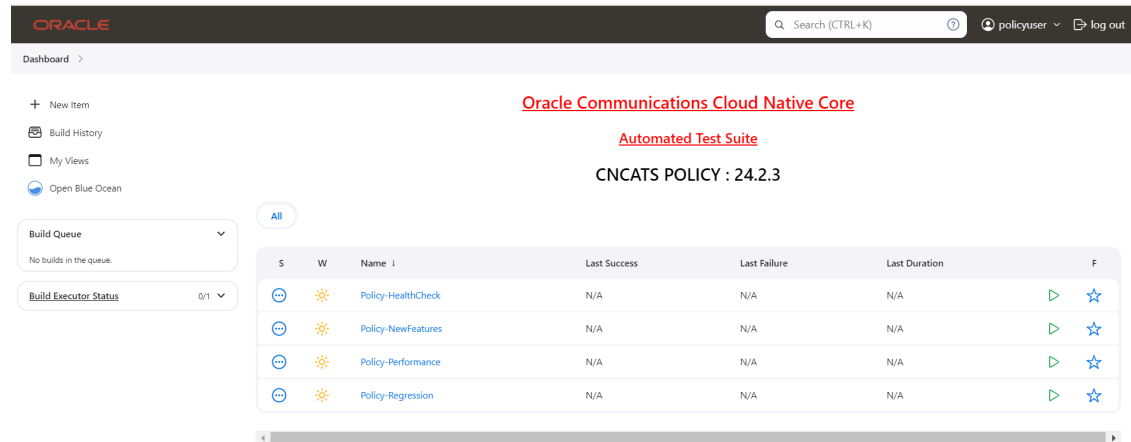

## 2.9 ATS Tagging Support

The ATS Tagging Support feature assists in running the feature files after filtering features and scenarios based on tags. Instead of manually navigating through several feature files, the user can save time by using this feature.

The GUI offers the following four options for selecting tag types:

- Feature\_Include\_Tags:** The features that contain either of the tags available in the **Feature\_Include\_Tags** field are considered for tagging.
  - For example, "cne-common", "config-server". All the features that have either "cne-common" or "config-server" tags are taken into consideration.
- Feature\_Exclude\_Tags:** The features that contain neither of the tags available in the **Feature\_Exclude\_Tags** field are considered for tagging.
  - For example, "cne-common", "config-server". All the features that have neither "cne-common" nor "config-server" as tags are taken into consideration.
- Scenario\_Include\_Tags:** The scenarios that contain either of the tags available in the **Scenario\_Include\_Tags** field are considered.
  - For example, "sanity", "cleanup". The scenarios that have either "sanity" or "cleanup" tags are taken into consideration.
- Scenario\_Exclude\_Tags:** The features that contain neither of the tags available in the **Scenario\_Exclude\_Tags** field are considered.
  - For example, "sanity", "cleanup". The scenarios that have neither "sanity" nor "cleanup" as tags are taken into consideration.

### Filter with Tags

The procedure to filter feature files and scenarios based on tags are as follows:

- On the NF home page, click any new feature or regression pipeline, where you want to use this feature.
- In the left navigation pane, click **Build with Parameters**. The following image appears.

Figure 2-28 Filter with Tags

Dashboard > SCP-Regression >

Favorite  
Open Blue Ocean  
Rename  
Test Results Analyzer  
Pipeline Syntax

Build History trend  
No builds  
Atom feed for all Atom feed for failures

**EXECUTION OPTIONS**

TestSuite: Regression  
Execute\_Suite: R15  
Configuration\_Type: Product\_Config  
FilterWithTags: NO  
Include\_NewFeatures: NO  
Fetch\_Log\_Upon\_Failure: YES  
Log\_Type: AppLog  
Log\_Level: DEFAULT  
HTTPX\_LOG\_LEVEL: Disabled

**FEATURES AND TESTCASES**

Features: All  
TestCases: All

3. Select **Yes** from the **FilterWithTags** drop-down menu. The result shows four input fields. The default value of **FilterWithTags** field is "No".
4. The input fields serve as a search or filter, displaying all tags that match the prefix entered. You can select one or multiple tags.

Figure 2-29 Tags Matching with Entered Prefix

Dashboard > Policy-Regression >

Favorite  
Open Blue Ocean  
Stages  
Rename  
Test Results Analyzer  
Pipeline Syntax

Build History trend  
Filter...  
Feb 20, 2024, 7:02 AM  
Atom feed for all Atom feed for failures

**EXECUTION OPTIONS**

TestSuite: Regression  
SUT: PCF  
Configuration\_Type: Product\_Config  
FilterWithTags: Yes  
Feature\_Include\_Tags: c  
Feature\_Exclude\_Tags:  
cmservice (checked)  
config-service (checked)  
one-common (checked)  
config-server (unchecked)  
Scenario\_Include\_Tags:  
Scenario\_Exclude\_Tags:  
Submit

5. Select the required tags from the different tags list and click **Submit**.

The specified feature-level tags are used to filter out features that contain any one of the include tags and none of the exclude tags. Here, any or both the fields may be left empty. All features are automatically taken into consideration when both fields are empty.

The scenario level tags are used to filter out the scenarios from the features filtered above. Only scenarios with any of the include tags and none of the exclude tags are considered. Any or both fields can be empty. When both fields are empty, all the scenarios from the above filtered feature files are considered.

**Note**

- If you select the Select\_Option as 'All', all the displayed features and scenarios will run.
- If you select the Select\_Option as 'Single/MultipleFeatures', it enables you to select some features, and only those features and respective scenarios are going to run.

## 2.9.1 Combination of Tags and their Results

The combination of tags and expected results are as follows.

**Table 2-6 Result of Filtered Tags**

| Feature_Include | Feature_Exclude | Scenario_Include | Scenario_Exclude | Results                                                                                                                                   |
|-----------------|-----------------|------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| -               | -               | -                | -                | All the features and scenarios are taken into consideration.                                                                              |
| "abc","def"     | -               | -                | -                | Features with either "abc" or "def" tags and all scenarios from the filtered features are taken into consideration.                       |
| -               | "abc","def"     | -                | -                | All the features with neither "abc" nor "def" tags and all scenarios from the filtered features are taken into consideration.             |
| -               | -               | "sanity","cne"   | -                | Scenarios with either "sanity" or "cne" tags and features having these scenarios are taken into consideration.                            |
| -               | -               | -                | "sanity","cne"   | Scenarios with neither "sanity" nor "cne" tags and features having these filtered scenarios are taken into consideration.                 |
| "abc","def"     | "ghi"           | -                | -                | Features with either "abc" or "def" tags but without the "ghi" tag and all scenarios from filtered features are taken into consideration. |

Table 2-6 (Cont.) Result of Filtered Tags

| Feature_Include | Feature_Exclude | Scenario_Include | Scenario_Exclude | Results                                                                                                                                                                                                    |
|-----------------|-----------------|------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "abc","def"     | -               | "sanity","cne"   | -                | Scenarios only with either "sanity" or "cne" tags and only features that contain these scenarios and have either "abc" or "def" as feature tags are taken into consideration.                              |
| "abc","def"     | -               | -                | "sanity","cne"   | Scenarios with neither "sanity" nor "cne" tags and only features that contain the filtered scenarios and have either "abc" or "def" feature tags are taken into consideration.                             |
| -               | "ghi"           | "sanity","cne"   | -                | Features without the "ghi" tag and scenarios with either "sanity" or "cne" tags from the filtered features are taken into consideration.                                                                   |
| -               | "ghi"           | -                | "sanity","cne"   | Features without the "ghi" tag and scenarios without the "sanity" and "cne" tags from filtered features are taken into consideration.                                                                      |
| -               | -               | "sanity","cne"   | "cleanup"        | Scenarios with either the "sanity" or "cne" tags and without the "cleanup" tag and features with filtered scenarios are taken into consideration.                                                          |
| "abc","def"     | "ghi"           | "sanity","cne"   | -                | Scenarios with either the "sanity" or "cne" tags and features that have these scenarios and have either the "abc" or "def" tags but not the "ghi" tag are taken into consideration.                        |
| "abc","def"     | -               | "sanity","cne"   | "cleanup"        | Scenarios with either the "sanity" or "cne" tags and without the "cleanup" tag, and features having the filtered scenarios and having the feature tags either "abc" or "def" are taken into consideration. |

Table 2-6 (Cont.) Result of Filtered Tags

| Feature_Include | Feature_Exclude | Scenario_Include | Scenario_Exclude | Results                                                                                                                                                                                                         |
|-----------------|-----------------|------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "abc","def"     | "ghi"           | -                | "cleanup"        | Scenarios without the tag "cleanup", and features with filtered scenarios and having either "abc" or "def" as feature tags but not the "ghi" tag are taken into consideration.                                  |
| -               | "ghi"           | "sanity","cne"   | "cleanup"        | Scenarios with either the "sanity" or "cne" tags and without the "cleanup" tag, and features with filtered scenarios and not the tag "ghi," are taken into consideration.                                       |
| "abc","def"     | "ghi"           | "sanity","cne"   | "cleanup"        | Scenarios with either "sanity" or "cne" tags and without the "cleanup" tag, and features with filtered scenarios and feature tags either "abc" or "def" but without the tag "ghi" are taken into consideration. |

 **Note**

- The tags mentioned in the table are just examples; they may or may not be actually used.
- The **Replay** option in the Jenkins GUI is not supported for tag-related test case execution. Always trigger builds related to tagging from the **Build with Parameter** step, and do not replay any previous builds.
- 

## 2.10 Custom Folder Implementation

The Custom Folder Implementation feature allows the user to update, add, or delete test cases without affecting the original product test cases in the new features, regression, and performance folders. The implemented custom folders are cust\_newfeatures, cust\_regression, and cust\_performance. The custom folders contain the newly created, customised test cases.

Initially, the product test case folders and custom test case folders will have the same set of test cases. The user can perform customization in the custom test case folders, and ATS always runs the test cases from the custom test case folders. If the option "Configuration\_Type" is present on the GUI, the user needs to set its value to "Custom\_Config" to populate test cases from the custom test case folders.



Figure 2-30 Custom Config Folder

**Automated Test Suite - POLICY**


**EXECUTION OPTIONS**

|                                  |                                      |                                                                                |                             |
|----------------------------------|--------------------------------------|--------------------------------------------------------------------------------|-----------------------------|
| <b>TestSuite</b><br>Regression   | <b>SUT</b><br>PCF                    | <b>Configuration_Type</b><br>Product_Config<br>Product_Config<br>Custom_Config | <b>FilterWithTags</b><br>No |
| <b>Include_NewFeatures</b><br>NO | <b>Fetch_Log_Upon_Failure</b><br>YES |                                                                                |                             |

### Summary of Custom Folder Implementation

- Separate folders such as cust\_newfeatures, cust\_regression, and cust\_performance are created to hold the custom cases.
- The prepackaged test cases are available in the newfeature and regression Folder.
- The user copies the required test cases to the cust\_newfeatures and cust\_regression folders, respectively.
- Jenkins always points to the cust\_newfeatures and cust\_regression folders to populate them in the menu.  
If someone initially launches ATS, they will not see any test cases in the menu if the cust folders are not populated. To avoid this, it is recommended to prepopulate both the folders, cust and original, and ask the user to modify only the cust folder if needed.

Figure 2-31 Summary of Custom Folder Implementation

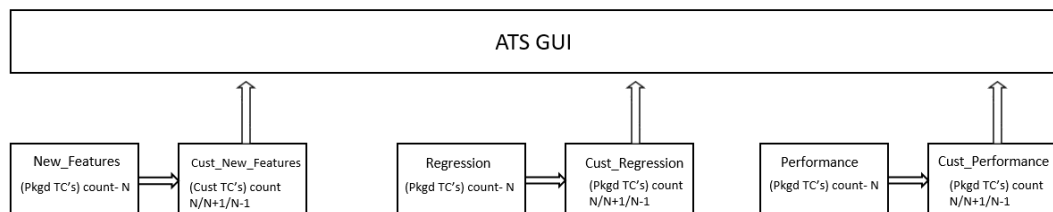

## 2.11 Individual Stage Group Selection

The Individual Stage Group Selection feature allows you to select and execute a single or multiple stages or groups by selecting a check box for the corresponding stage or group.

Follow the steps to select an individual stage or group:

1. Click NF-Regression or NF-NewFeatures, and then click **Build with Parameters**.
2. On the FEATURE and TESTCASES section, click **Select** from the **Features** drop-down menu.
3. Select the corresponding check box to select any number of stages or groups you want to run from the list available for execution.

Figure 2-32 Stages or Groups Selection

Dashboard > Policy-NewFeatures >

Favorite

Open Blue Ocean

Rename

Test Results Analyzer

Pipeline Syntax

Build History trend

No builds

Atom feed for all Atom feed for failures

**EXECUTION OPTIONS**

TestSuite: NewFeatures

SUT: PCF

Configuration\_Type: Product\_Config

FilterWithTags: No

Include\_Regression: NO

Fetch\_Log\_Upon\_Failure: YES

**FEATURES AND TESTCASES**

Features: Select

Stage: stage1

Group: group1

Bulwark\_Support\_SM\_Create\_Delete\_UpdateNotify\_PDSNotification\_RedCap\_verify

internal\_Binding\_Header\_AMPolicy\_Svname\_nf\_instance

internal\_SM\_Multi\_ServerHeader\_with\_Retry\_using\_SCP

internal\_SM\_Rc\_AAR-L\_without\_MCD

Stage: stage2

Group: group3

Pending\_Transaction\_N7\_Fast\_Lock\_Bulwark

Stage: stage3

Group: group3

internal\_max\_n\_session

TestCases: All

Total Test Cases are : 14

Build Cancel

4. Scroll down to click **Build**.

## 2.12 Lightweight Performance

The Lightweight Performance feature allows you to run performance test cases. In ATS, a new pipeline known as "<NF>-Performance", where NF stands for Network Function, is introduced, for example, Policy-Performance.

Figure 2-33 Sample Screen: Home Page

Dashboard >

+ New Item

People

Build History

My Views

Open Blue Ocean

Build Queue

No builds in the queue.

Build Executor Status

1 title

**Oracle Communications Cloud Native Core**

**Automated Test Suite**

**CNCATS POLICY : 24.1.0**

| S | W | Name               | Last Success | Last Failure | Last Duration | F   |
|---|---|--------------------|--------------|--------------|---------------|-----|
| ⊙ | ⚠ | Policy-HealthCheck | N/A          | 13 days #3   | 3.6 sec       | ▶ ☆ |
| ⊙ | ⚡ | Policy-NewFeatures | N/A          | N/A          | N/A           | ▶ ☆ |
| ⊙ | ⚡ | Policy-Performance | N/A          | N/A          | N/A           | ▶ ☆ |
| ⊙ | ⚡ | Policy-Regression  | 16 days #1   | N/A          | 3 min 32 sec  | ▶ ☆ |

Icon: S M L

Icon legend

Atom feed for all

Atom feed for failures

Atom feed for just latest builds

The <NF>-Performance pipeline verifies from 500 to 1k TPS (Transactions per Second) of traffic using the http-go tool, a tool used to run the traffic on the backend. It also helps to monitor the CPU and memory of microservices while running lightweight traffic.


The duration of the traffic run can be configured on the pipeline.

### 2.12.1 Configure <NF>-Performance Pipeline

Perform the following to configure the performance pipeline:

1. On the NF home page, click **<NF>-Performance** pipeline, and then click **Configure**. The **General** tab appears. The user must wait for the page to load completely.
2. Click the **Advanced Project Options** tab. Scroll down to reach the **Pipeline** configuration section.

Figure 2-34 Advanced Project Options

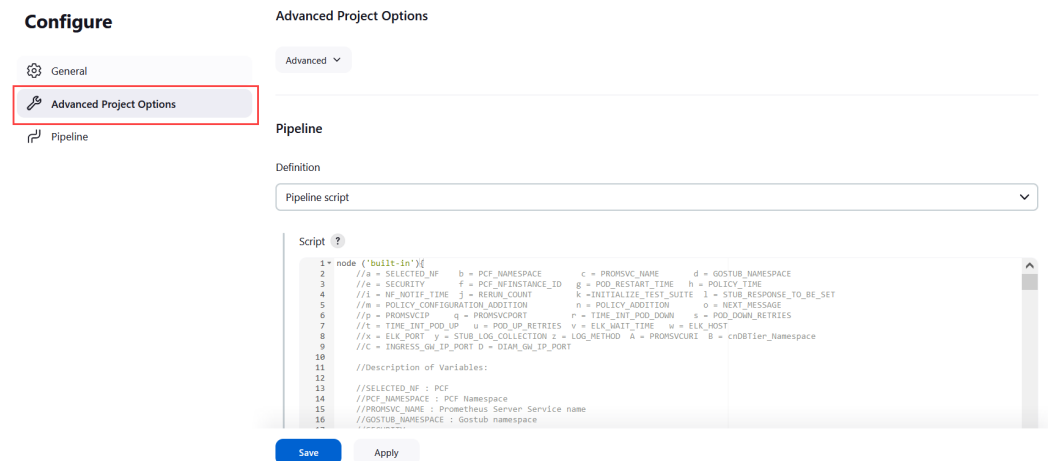

3. Update the configurations as per your NF requirements and click **Save**. The **Pipeline <NF>-Performance** page appears.
4. Click **Build Now**. This triggers lightweight traffic for the respective network function. For more information, see [Running SLF-Performance Pipeline: Model 2: Single Site Deployment](#).

## 2.13 Managing Final Summary Report, Build Color, and Application Log


This feature displays an overall execution summary, such as the total run count, pass count, and fail count.

### Supports Implementation of Total-Features

ATS supports implementation of **Total-Features** in the final summary report. Based on the rerun value set, the **Final Result** section in the final summary report displays the Total-Features output.

- If rerun is set to 0, the test result report shows the following result:

Figure 2-35 Total-Features = 1, and Rerun = 0

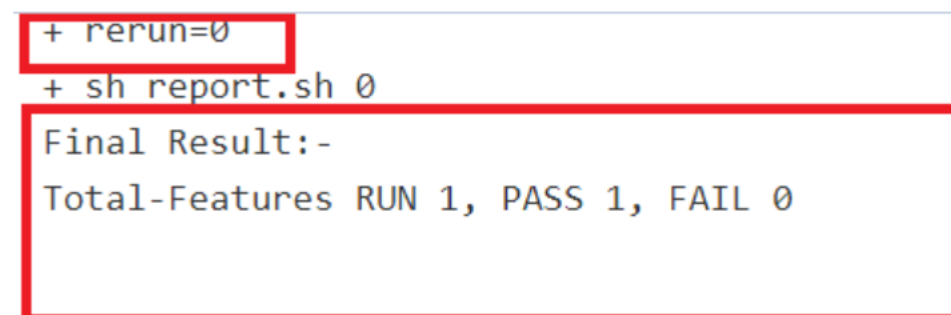

- If rerun is set to non-zero, the test result report shows the following result:

**Figure 2-36 Total-Features = 1, and Rerun = 2**

```
+ rerun=2
+ sh report.sh 2
Initial Run :-
Features RUN 1, PASS 0, FAIL 1

1st Rerun:-
Features RUN 1, PASS 0, FAIL 1

2nd Rerun:-
Features RUN 1, PASS 0, FAIL 1

Final Result:-
Total-Features RUN 1, PASS 0, FAIL 1
```

### Changes After Parallel Test Execution Framework Feature Integration

After incorporating the Parallel Test Execution feature, the following results were obtained:

### Final Summary Report Implementations

**Figure 2-37 Group Wise Results**

```
*****Stage: stage1 Group: group3 Result*****
Initial Run :-
Features RUN 1, PASS 0, FAIL 1

1st Rerun:-
Features RUN 1, PASS 0, FAIL 1

2nd Rerun:-
Features RUN 1, PASS 0, FAIL 1

stage1 group3
Final Result:-
Total-Features RUN 1, PASS 0, FAIL 1
```

**Figure 2-38 Overall Result When Selected Feature Tests Pass**

```
*****Overall Result*****
Took 0h0m50s

Final Result:-
Total-Features RUN 1, PASS 1, FAIL 0
```

**Figure 2-39 Overall Result When Any of the Selected Feature Tests Fail**

```

*****Overall Result*****
Failing scenarios:
Stage:stage1 Group:group3
  SCP_Registration_With_PLMNList.feature:45  Static configuration to NRF for all nfType

Took 0h1m59s

Initial Run:-
Features RUN 1, PASS 0, FAIL 1

1st Rerun:-
Features RUN 1, PASS 0, FAIL 1

2nd Rerun:-
Features RUN 1, PASS 0, FAIL 1

Final Result:-
Total-Features RUN 1, PASS 0, FAIL 1

```

### Implementing Build Colors

ATS supports implementation of build color. The details are as follows:

**Table 2-7 Build Color Details**

| Rerun Values   | Rerun set to zero         |                                                                                                      | Rerun set to non-zero     |                                                  |                                                                                                     |
|----------------|---------------------------|------------------------------------------------------------------------------------------------------|---------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------------------------|
|                | All Passed in Initial Run | Some Failed in Initial Run                                                                           | All Passed in Initial Run | Some Passed in Initial Run, Rest Passed in Rerun | Some Passed in Initial Run, Some Failed Even After Rerun                                            |
| Build Status   | SUCCESS                   | FAILURE                                                                                              | SUCCESS                   | SUCCESS                                          | FAILURE                                                                                             |
| Pipeline Color | GREEN                     | Execution Stage where test cases failed shows YELLOW color, rest of the successful stages are GREEN. | GREEN                     | GREEN                                            | Execution Stage where test cases failed shows YELLOW color, rest of the successful stages are GREEN |
| Status Color   | BLUE                      | RED                                                                                                  | BLUE                      | BLUE                                             | RED                                                                                                 |

### Changes After Integrating Parallel Test Execution Framework Feature

In sequential execution, the build color or overall pipeline status of any run was mainly dependent on the following parameters:

- the rerun count and the pass or fail status of test cases in the initial run
- the rerun count and the pass or fail status of test cases in the final run

For the parallel test case execution, the pipeline status also depends on another parameter, "Fetch\_Log\_Upon\_Failure," which is given in the **build with parameters** page. If the parameter Fetch\_Log\_Upon\_Failure is not there, its default value is considered "NO".

**Table 2-8 Pipeline Status When Fetch\_Log\_Upon\_Failure = NO**

| Rerun Values  | Rerun set to zero         |                            | Rerun set to non-zero     |                                                  |                                                          |
|---------------|---------------------------|----------------------------|---------------------------|--------------------------------------------------|----------------------------------------------------------|
| Passed/Failed | All Passed in Initial Run | Some Failed in Initial Run | All Passed in Initial Run | Some Passed in Initial Run, Rest Passed in Rerun | Some Passed in Initial Run, Some Failed Even After Rerun |
| Status        | SUCCESS                   | FAILURE                    | SUCCESS                   | SUCCESS                                          | FAILURE                                                  |


**Table 2-9 Pipeline Status When Fetch\_Log\_Upon\_Failure = YES**

| Rerun Values  | Rerun set to zero         |                                                |                                                | Rerun set to non-zero     |                                                  |                                                          |
|---------------|---------------------------|------------------------------------------------|------------------------------------------------|---------------------------|--------------------------------------------------|----------------------------------------------------------|
| Passed/Failed | All Passed in Initial Run | Some Failed in Initial Run and Failed in Rerun | Some Failed in Initial Run and Passed in Rerun | All Passed in Initial Run | Some Passed in Initial Run, Rest Passed in Rerun | Some Passed in Initial Run, Some Failed Even After Rerun |
| Status        | SUCCESS                   | FAILURE                                        | SUCCESS                                        | SUCCESS                   | SUCCESS                                          | FAILURE                                                  |


Some common combinations of these parameters, such as rerun\_count, Fetch\_Log\_Upon\_Failure, and pass/fail status of test cases in initial and final run and the corresponding build colors are as follows:

- When Fetch\_Log\_Upon\_Failure is set to YES and rerun\_count is set to 0, test cases pass in the initial run. The pipeline will be green, and its status will show as blue.


**Figure 2-40 Fetch\_Log\_Upon\_Failure is set to YES and rerun\_count is set to 0, test cases pass**

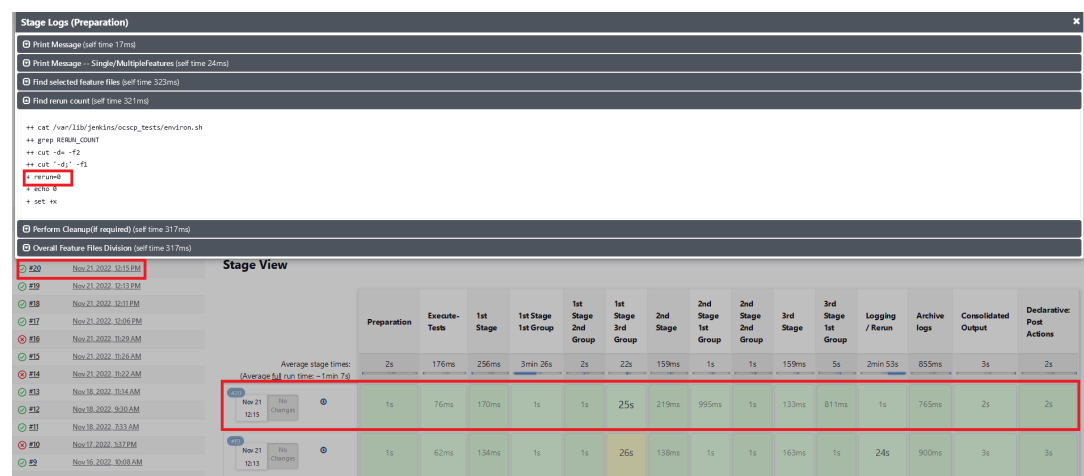

- When Fetch\_Log\_Upon\_Failure is set to YES and rerun\_count is set to 0, test cases fail on the initial run but pass during the rerun. The initial execution stage is yellow and all subsequent successful stages will be green, and the status will be blue.

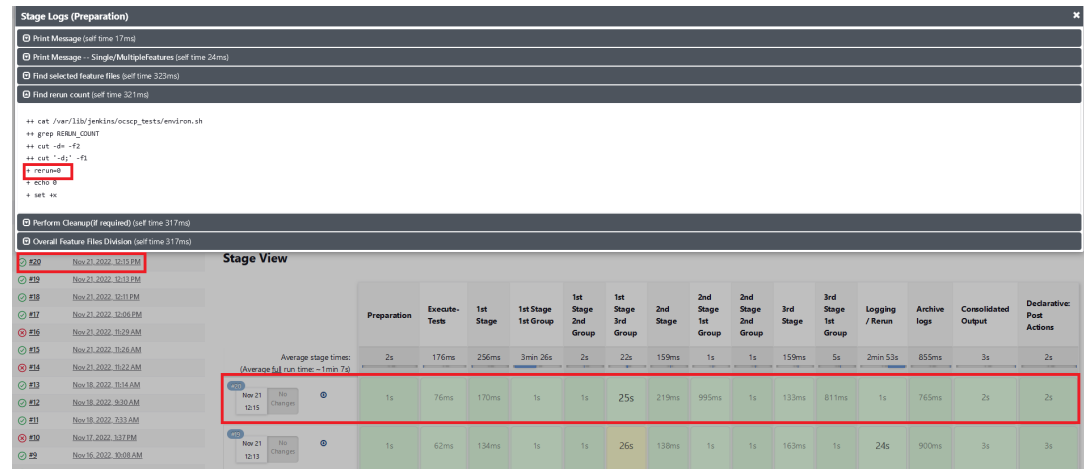
**Figure 2-41 Test Cases Fail on the Initial Run but Pass in the Rerun**

- When Fetch\_Log\_Upon\_Failure is set to YES and rerun\_count is set to 0, test cases fail in both the initial and the rerun. Execution stages will show as yellow, all other successful stages will be shown as green, and the overall pipeline status will be red.

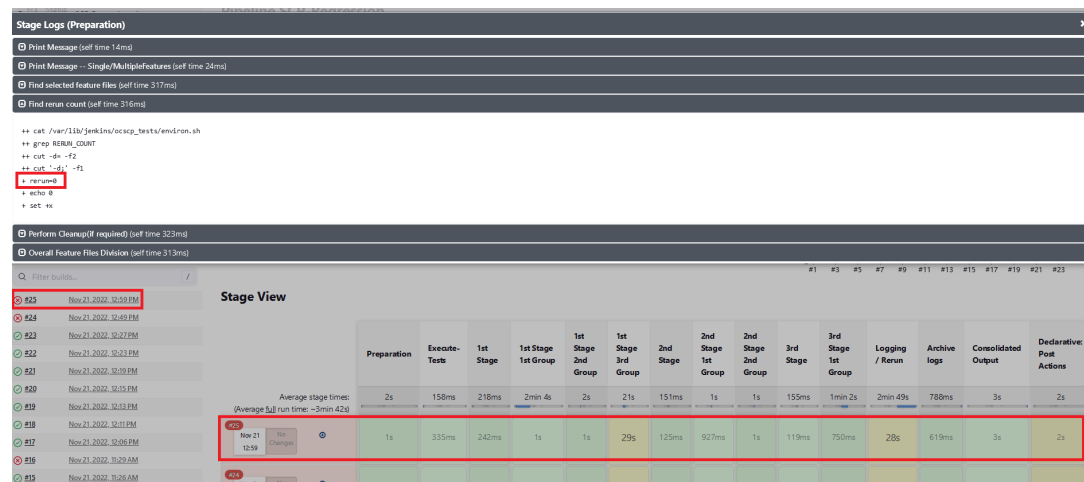**Figure 2-42 Test Cases Fail in Both the initial and the Rerun**

- When Fetch\_Log\_Upon\_Failure is set to YES and the rerun count is set to non-zero. If all of the test cases pass in the first run, no rerun will be initiated because the cases have already been passed. The pipeline will be green, and the status will be indicated in blue.

Figure 2-43 All of the Test cases Pass in the Initial Run

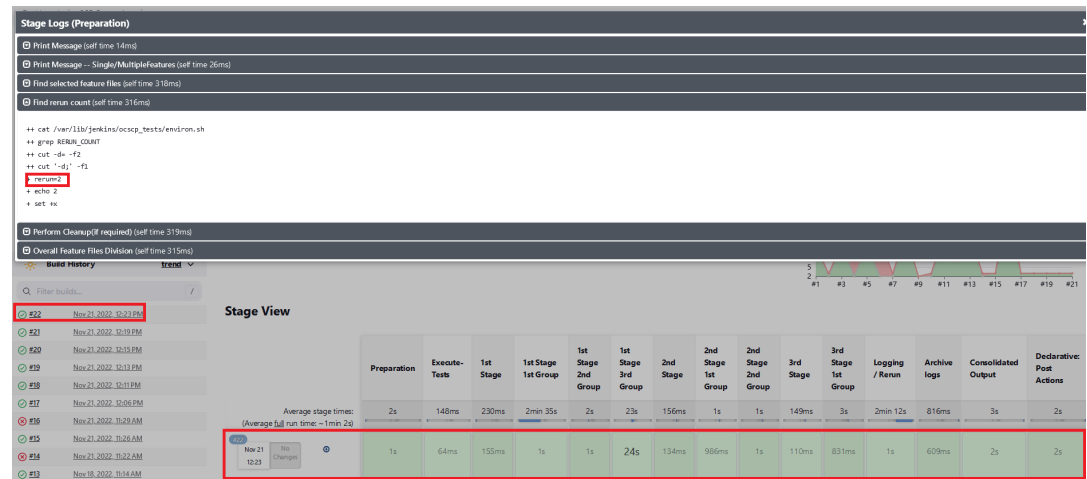

- When Fetch\_Log\_Upon\_Failure is set to YES and the rerun count is set to non-zero. If some of the test cases fail in the initial run and the remaining ones pass in one of the remaining reruns, then the initial test case execution stages will show as yellow, the remaining stages as green, and the overall pipeline status as blue.


Figure 2-44 Test Cases Fail in the Initial Run and the Remaining Ones Pass



- When Fetch\_Log\_Upon\_Failure is set to YES and the rerun count is set to non-zero. If some of the test cases fail in the initial run and the remaining ones fail in all the remaining reruns, the stages of test case execution will be shown in yellow, the remaining stages in green, and the overall pipeline status in red.



**Figure 2-45 Test Cases Fail in the Initial and Remaining Reruns**

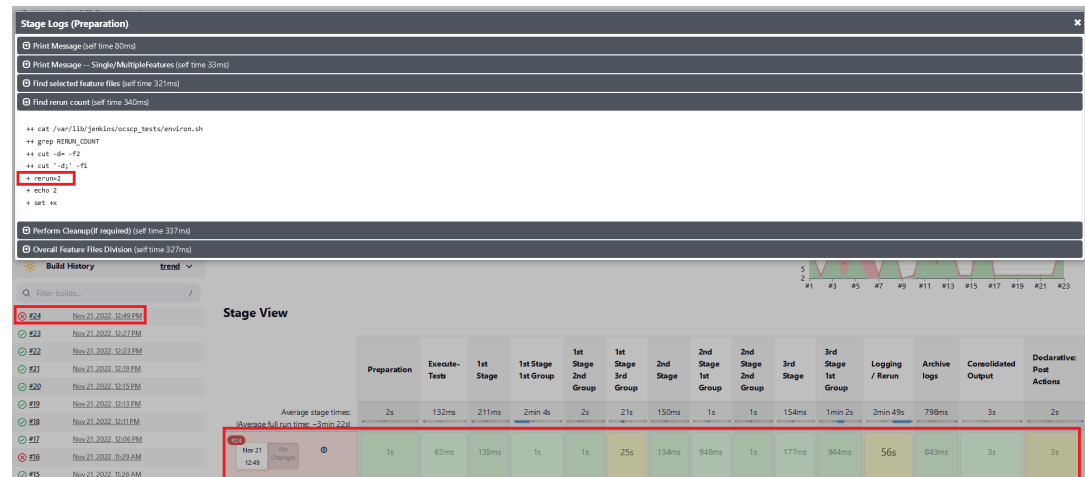

- Whenever any of the multiple Behave processes that are running in the ATS are exited without completion, the stage in which the process exited and the consolidated output stage are shown as yellow, and the overall pipeline status will be yellow. Also in the consolidated output stage, near the respective stage result, the exact run in which the Behave processes exited without completion will be printed.

**Figure 2-46 Stage View When Behave Process is Incomplete**


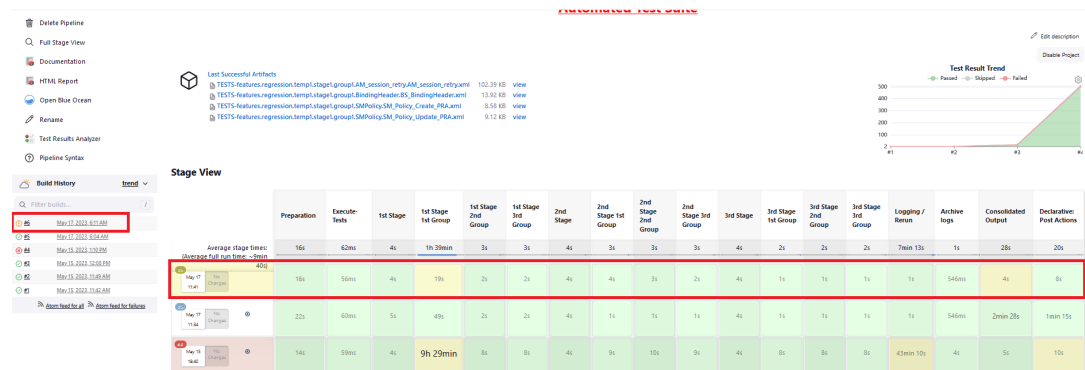


**Figure 2-47 Consolidated Report for a Group When a Behave Process was Incomplete**

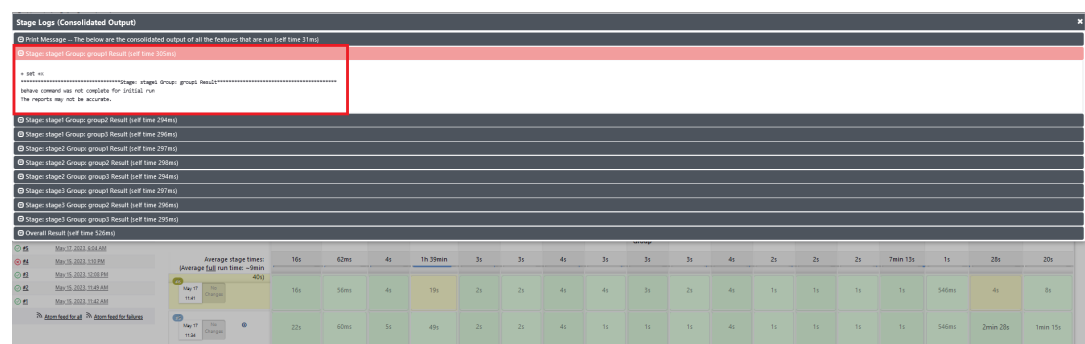

### Implementing Application Log

ATS automatically fetches the SUT Debug logs during the rerun cycle if it encounters any failures and saves them in the same location as the build console logs. The logs are fetched for the rerun time duration only using the timestamps. If, for some microservices, there are no log entries in that time duration, it does not capture them. Therefore, the logs are fetched only for the microservices that have an impact or are associated with the failed test cases.

**Location of SUT Logs:** /var/lib/jenkins/.jenkins/jobs/PARTICULAR-JOB-NAME/builds/BUILD-NUMBER/date-timestamp-BUILD-N.txt

#### ① Note

The file name of the SUT log is added as a suffix with the date, timestamp, and build number (for which the logs are fetched). These logs share the same retention period as build console logs, set in the ATS configuration. It is recommended to set the retention period to optimal owing to the Persistent Volume Claim (PVC) storage space availability.

## 2.14 Modifying Login Password

You can log in to the ATS application using the default login credentials. The default login credentials are shared for each NF in the respective chapter of this guide.

Perform the following procedure to modify the default password:

1. Log in to the ATS application using the default login credentials. The home page of the respective NF appears.
2. Click the down arrow next to the user name.
3. Click **Configure**.
4. In the Password section, enter the new password in the **Password** and **Confirm Password** fields..

Figure 2-48 Logged-in User Details

The screenshot displays the 'Logged-in User Details' page in the Oracle Cloud Native Core Automated Testing Suite. The page is organized into several sections:

- Full Name:** infuser
- Description:** (Empty text area)
- API Token:** Current token: There are no registered tokens for this user. (Add new token button)
- Credentials:** Credentials are only available to the user they belong to.
- E-mail:** E-mail address: infuser@oracle.com. (Note: You can't add a new e-mail address, but you can add a new one.)
- My Views:** Default view: (Empty dropdown)
- Notification URL:** Default (dropdown)
- Password:** (Highlighted with a red box) Includes fields for Password, Confirm Password, and New Password.
- SSH Public Keys:** (Empty text area)
- Session Termination:** (Terminate All Sessions button)
- Settings for search:** (Save, Apply buttons)

5. Click **Save**.  
A new password is set for you.

## 2.15 Multiselection Capability for Features and Scenarios

ATS allows you to select and run single or multiple features and scenarios by selecting a check box for the corresponding features or scenarios.

### 2.15.1 Feature Level Selection

Perform the following procedure to run the single or multiple features:

1. Log in to ATS using the respective <NF> login credentials.
2. On the NF home page, click any new feature or regression pipeline from where you want to run the feature.
3. In the left navigation pane, click **Build with Parameters**.
4. Scroll down to the FEATURES AND TEST CASES section.
5. Click **Select** from the **Features** drop-down.

**Figure 2-49 Feature Selection**

Dashboard > Policy-NewFeatures >

**Oracle Communications Cloud Native Core**  
**Automated Test Suite - POLICY**

**EXECUTION OPTIONS**

|                          |                               |                                      |                      |
|--------------------------|-------------------------------|--------------------------------------|----------------------|
| TestSuite<br>NewFeatures | SUT<br>PCF                    | Configuration_Type<br>Product_Config | FilterWithTags<br>No |
| Include_Regression<br>NO | Fetch_Log_Upon_Failure<br>YES |                                      |                      |

**FEATURES AND TESTCASES**

Features: Select

Stage: stage1 ☐

Group: group1 ☐

- ☒ Bulwark\_Support\_SM\_Create\_Delete\_UpdateNotify\_PDSNotification\_RedCap\_verify
- ☒ Internal\_SM\_Multi\_ServerHeader\_with\_Retry\_using\_SCP

Stage: stage2 ☐

Group: group3 ☐

- ☐ Internal\_Binding\_Header\_AMPolicy\_Svname\_nf\_instance
- ☐ Internal\_SM\_Rx\_AAR-I\_without\_MCD

Stage: stage3 ☐

Group: group3 ☐

☐ Pending\_Transaction\_N7\_Fast\_Lock\_Bulwark

6. Select any number of features by selecting the check box for the corresponding feature you want to run from the list available for execution.
7. Click **Build**.

## 2.15.2 Scenario Selection

Perform the following procedure to run the single or multiple test cases or scenarios related to features:

1. Log in to ATS using the respective <NF> login credentials.
2. On the NF home page, click any new feature or regression pipeline from where you want to run the feature.
3. In the left navigation pane, click **Build with Parameters**.
4. Scroll down to the FEATURES AND TEST CASES section.
5. Click **Select** from the **Features** drop-down.
6. Select any number of features by selecting the check box for the corresponding feature to view the TestCases details mapped to each feature.
7. Click **Select** from the **TestCases** drop-down.

Figure 2-50 Scenario or Testcase Selection

**TestCases** Select ▼

Total Test Cases are : 2

Stage: stage1 Group: group1

Bulwark\_Support\_SM\_Create\_Delete\_UpdateNotify\_PDSNotification\_RedCap\_verify

☒ Bulwark\_CHF\_UDR\_notification\_RedCap\_verify

▶ Build Cancel

8. Select the check box for the corresponding test case or scenario to run the test cases mapped to the feature.
9. Click **Build**.

## 2.16 Parallel Test Execution

Parallel test execution allows you to perform multiple logically grouped tests simultaneously on the same System Under Test (SUT) to reduce the overall execution time of ATS.

ATS currently runs all its tests in a sequential manner, which is time-consuming. With parallel test execution, tests can be run concurrently rather than sequentially or one at a time. Test cases or feature files are now separated into different folders, such as stages and groups, for concurrent test execution. Different stages, such as stage 1, stage 2, and stage 3, run the test cases in a sequential order, and each stage has its own set of groups. Test cases or feature files available in different groups operate in parallel. When all the groups within one stage have completed their execution, only then the next stage will start the execution.

### Pipeline Stage View

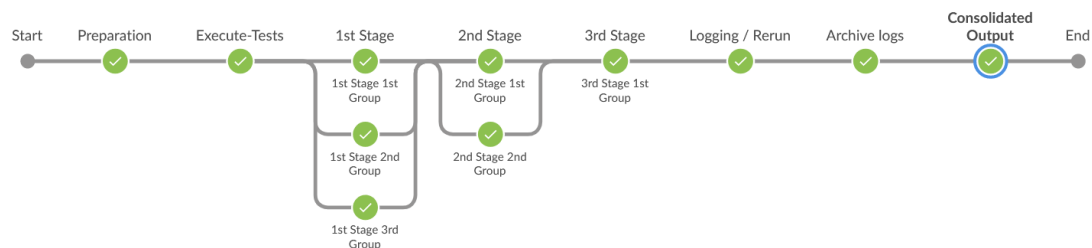
The pipeline stage view appears as follows:

**Figure 2-51 Pipeline Stage View****Stage View**

|                                                       | Preparation | Execute-Tests | 1st Stage | 1st Stage 1st Group | 1st Stage 2nd Group | 1st Stage 3rd Group | 2nd Stage | 2nd Stage 1st Group | 2nd Stage 2nd Group | 3rd Stage | 3rd Stage 1st Group | Logging / Rerun | Archive logs | Consolidated Output | Declarative: Post Actions |
|-------------------------------------------------------|-------------|---------------|-----------|---------------------|---------------------|---------------------|-----------|---------------------|---------------------|-----------|---------------------|-----------------|--------------|---------------------|---------------------------|
| Average stage times:<br>(Average full run time: ~54s) | 5s          | 59ms          | 1s        | 31s                 | 2s                  | 26s                 | 1s        | 999ms               | 1s                  | 1s        | 997ms               | 33s             | 487ms        | 2s                  | 6s                        |
| #92<br>Feb 07 14:10<br>No Changes                     | 5s          | 46ms          | 1s        | 1s                  | 1s                  | 27s                 | 1s        | 1s                  | 1s                  | 1s        | 887ms               | 2s              | 580ms        | 2s                  | 5s                        |

**Pipeline Blue Ocean View**

Blue Ocean is a Jenkins plugin that provides a better representation of concurrent execution with stages and groups. The pipeline blue ocean view appears as follows:

**Figure 2-52 Pipeline Blue Ocean View****Impact on Other Framework Features**

The integration of the parallel test framework feature has an impact on the following framework features. See the following sections for more details:


- [Application Log Collection](#)
- [ATS API](#)
- [Managing Final Summary Report, Build Color, and Application Log](#)
- [PCAP Log Collection](#)

## 2.16.1 ATS GUI Page Changes

This section describes the changes to the ATS GUI page to trigger a build.

**Changes in ATS GUI Page to Trigger a Build**

The feature name, file name, and test case name are displayed under their stage and group names.

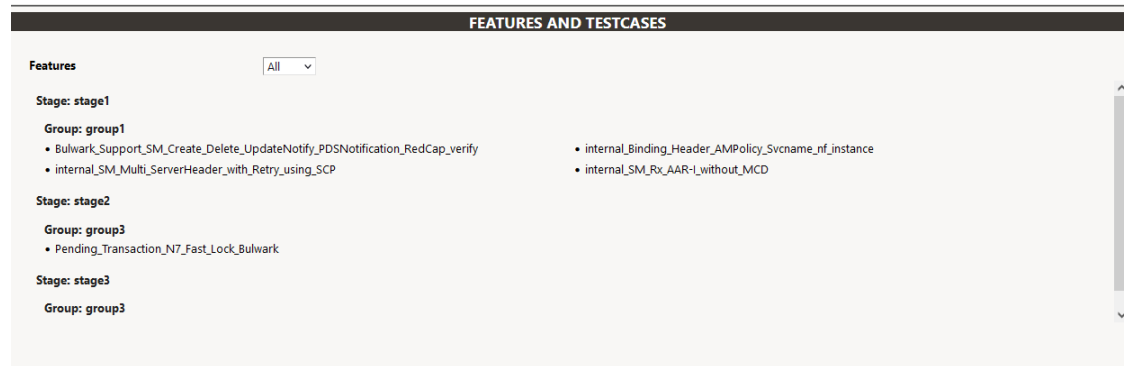**Figure 2-53** Displays Stages and Groups

## 2.16.2 ATS Console Log Changes

This section describes the changes to the ATS console log. The ATS console log contains logs of all the stages and groups. For more details, see [Downloading or Viewing Individual Group Logs](#).

- A test case's stage and group names are listed in the logger statements for that test case.

**Figure 2-54** Logger Statement

```
2022-12-06 09:34:53,762[32m INFO LOG: stage2.group1 STEP:5453 [0m] [32m10.233.109.13[0m
2022-12-06 09:34:53,762[32m INFO LOG: stage2.group1 STEP:5454 [0m] [32mudm1svc.scpsvc.svc.galaxy[0m
2022-12-06 09:34:53,893[32m INFO LOG: stage2.group1 STEP:5459 [0m] [32m{"url":"/USEast/nudm-uecm/v1/imsi
```

- When a test case fails, a list of test cases running in parallel gets printed to make the debugging easier. The name of the test case and the absolute path to the feature file it belongs to are listed in this list.

**Figure 2-55** Absolute Path of Feature File

```
2022-12-06 11:27:19,253[32m INFO LOG: stage1.group3.CleanUP:2317 [0m] [32mBelow feature(s)/scenario(s) were found
to be running in parallel at the time of failure:
{
  "feature_path": "/var/lib/jenkins/ocscp_tests/features/regression/release16features/allfeatures/stage1/group3
/SCP_Registration_With_PLMNList.feature",
  "scenario_name": "Static configuration to NRF for all nfType"
}
{
  "feature_path": "/var/lib/jenkins/ocscp_tests/features/regression/release16features/allfeatures/stage1/group1
/Version_support.feature",
  "scenario_name": "Scenario-1_To test Forward route for notification request UECM AMF Registration messages with
3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding header bl=nfset, when the apiVersionInUri is set to v2 and the
message is also sent to v2"
}
```


- The test result summary contains a summary for each group and an overall summary, along with the details of failing scenarios (stage-groupwise) and the total time taken by any pipeline execution. For further information, see the [Final Summary Report, Build Colour Changes](#).

### 2.16.3 Downloading or Viewing Individual Group Logs

To download individual group logs:


1. On the Jenkins pipeline page, click **Open Blue Ocean** in the left navigation pane.

Figure 2-56 Jenkins Pipeline Page

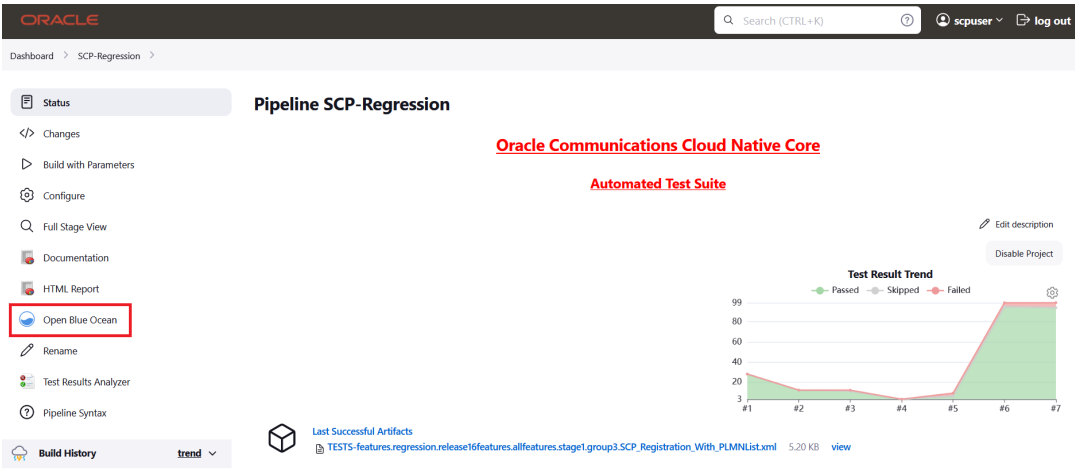

2. Click the desired build row on the Blue Ocean page.


Figure 2-57 Run the Build

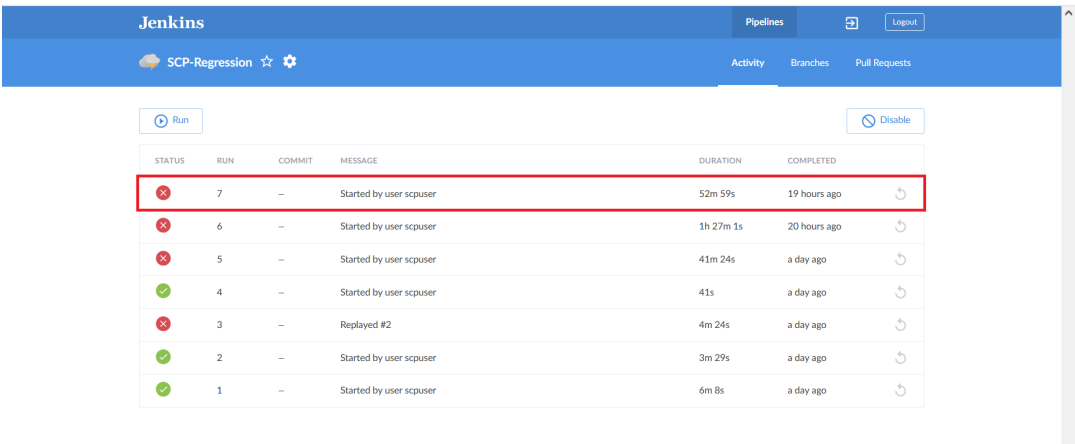

3. The selected build appears. The diagram displays the order in which the different stages, or groups, are executed.




Figure 2-58 Stage Execution

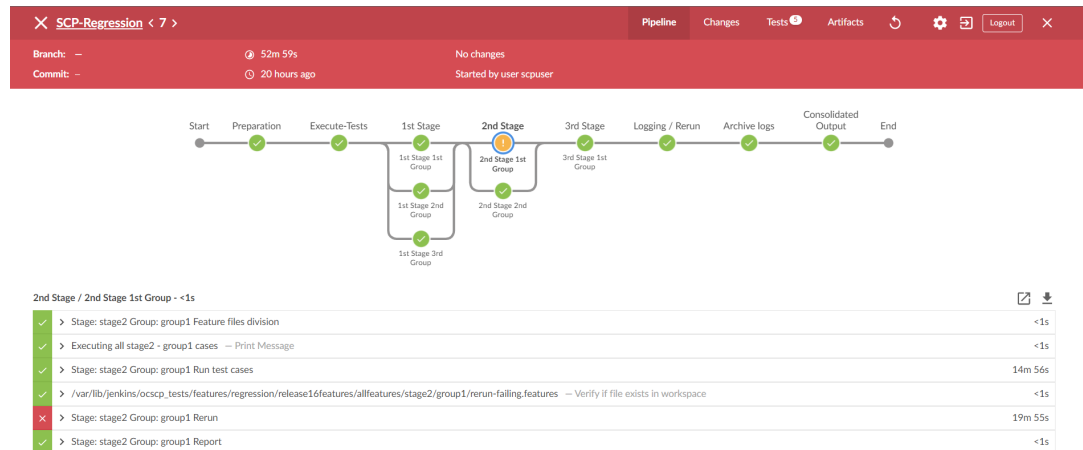

- Click the desired group to download the logs.

Figure 2-59 Executed Groups

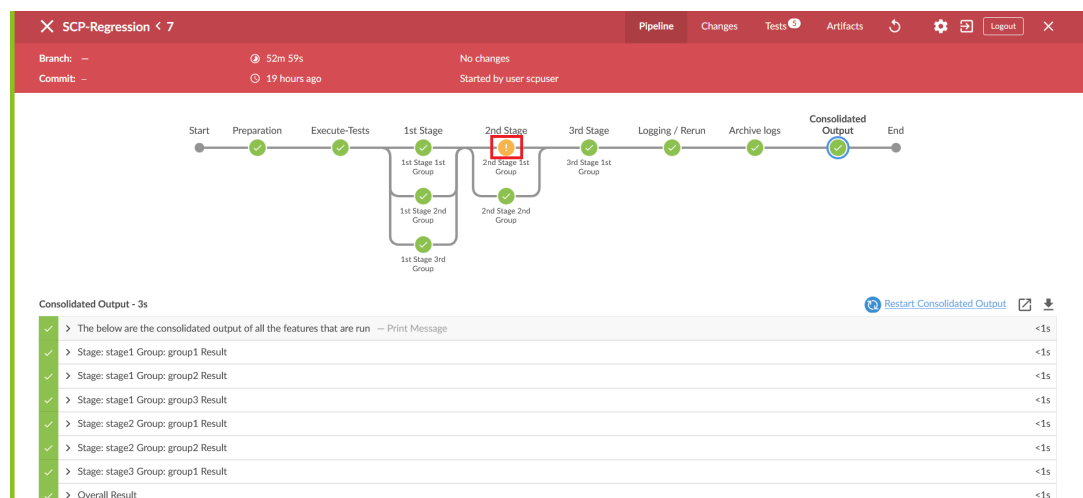

- Click the **Download** icon on the bottom right of the pipeline. The log for the selected group is downloaded to the local system.

Figure 2-60 Download Logs

The screenshot shows the Jenkins pipeline interface for 'SCP-Regression'. The pipeline status is 'No changes' and 'Started by user scpuser'. The pipeline consists of several stages: Start, Preparation, Execute-Tests, 1st Stage, 2nd Stage, 3rd Stage, Logging / Rerun, Archive logs, Consolidated Output, and End. The '2nd Stage' is currently selected, showing a list of steps. A red arrow points to the 'Download the log' icon (a document with a download arrow) in the top right corner of the step list.

| Step                                                                                                                                                         | Duration |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| > Stage: stage2 Group: group1 Feature files division                                                                                                         | <1s      |
| > Executing all stage2 - group1 cases -- Print Message                                                                                                       | <1s      |
| > Stage: stage2 Group: group1 Run test cases                                                                                                                 | 14m 56s  |
| > /var/lib/jenkins/ocscp_tests/features/regression/release16/features/allfeatures/stage2/group1/rerun-failing.features -- Verify if file exists in workspace | <1s      |
| > Stage: stage2 Group: group1 Rerun                                                                                                                          | 19m 55s  |

- To view the log, click the **Display Log** icon. The logs are displayed in a new window.

Figure 2-61 Display Logs

This screenshot is similar to Figure 2-60, showing the same Jenkins pipeline interface. However, the red arrow points to the 'Display Log' icon (a document with a magnifying glass) in the top right corner of the step list.

| Step                                                                                                                                                         | Duration |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| > Stage: stage2 Group: group1 Feature files division                                                                                                         | <1s      |
| > Executing all stage2 - group1 cases -- Print Message                                                                                                       | <1s      |
| > Stage: stage2 Group: group1 Run test cases                                                                                                                 | 14m 56s  |
| > /var/lib/jenkins/ocscp_tests/features/regression/release16/features/allfeatures/stage2/group1/rerun-failing.features -- Verify if file exists in workspace | <1s      |
| > Stage: stage2 Group: group1 Rerun                                                                                                                          | 19m 55s  |
| > Stage: stage2 Group: group1 Report                                                                                                                         | <1s      |

## Viewing Individual Group Logs without using Blue Ocean

There are two alternate ways to view individual group logs:

- Using Stage View
  - On the Jenkins pipeline page, hover the cursor over the group in stage view to view the logs.
  - Click the label **Logs** which appears in a pop-up. There will be a new pop-up window. It contains many rows, where each row corresponds to the execution of one Jenkins step.
  - Click the row labeled **Stage: stage\_name>."Group: <group\_name> Run test cases** to view the log for this group's execution.
  - Click the row labeled **Stage: stage\_name>." "group\_name> Rerun** to display the rerun logs.
- Using Pipeline Steps Page

1. On the Jenkins pipeline page, click the desired build number under the **Build History** drop down.
2. Click the **Pipeline Steps** button on the left pane.  
A table with columns for step, arguments, and status appears.
3. Under the Arguments column, find the label for the desired stage and group.
4. Click the step with the label **Stage: <stage\_name>Group: <group\_name>**.
5. Run test cases under it, or click the **Console output** icon near the status to view the log for this group execution.
6. To see rerun logs, find the step with the label **Stage: <stage\_name> Group: <group\_name>Rerun** under it.


## 2.17 Parameterization

This feature allows you to provide or adjust values for the input and output parameters needed for the test cases to be compatible with the SUT configuration. You can update or adjust the key-value pair values in the `global.yaml` and `feature.yaml` files for each of the feature files so that they are compatible with SUT configuration. In addition to the existing custom test case folders (Cust New Features, Cust Regression, and Cust Performance), this feature enables folders to accommodate custom data, default product configuration, and custom configuration. You can maintain multiple versions or copies of the custom data folder to suit varied or custom SUT configurations. With this feature, the ATS GUI has the option to either execute test cases with the default product configuration or with a custom configuration.

This feature enables you to perform the following tasks:

- Define parameters and assign or adjust values to make them compatible with SUT configuration.
- Execute test cases either with default product configurations or custom configurations and multiple custom configurations to match varied SUT configurations.
- Assign or adjust values for input or output parameters through custom or default configuration yaml files (key-value pair files).
- Define or adjust the input or output parameters for each feature file with its corresponding configuration.
- Create and maintain multiple configuration files to match multiple SUT configurations.


**Figure 2-62 SUT Design Summary**

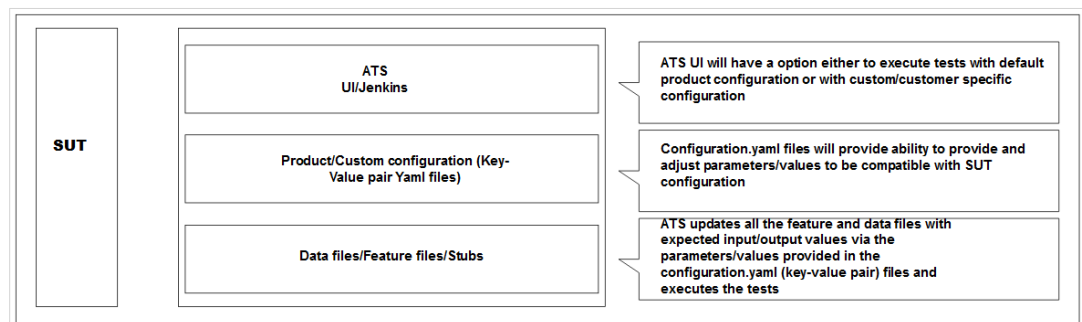

In the folder structure:

- The Product Config folder contains default product configuration files (feature-wise yaml per key-value pair), which are compatible with default product configuration.
- New features, Regression and Performance, Data folder, and Product Config folders are replicated or copied into custom folders and delivered as part of the ATS package in every release.
- You can customize custom folders by:
  - Removing test cases not needed or as appropriate for your use.
  - Adding new test cases as needed or as appropriate for your use.
  - Removing or adding data files in the cust\_data folder or as appropriate for your use.
  - Adjusting the parameters or values in the key-value pair per yaml file in the custom config folder for test cases to run or pass with a custom configured SUT.
- The product folders are always intact (unchanged) and you can update the Custom folders
- You can maintain multiple copies of Custom Configurations and bring them to use as needed or as appropriate for the SUT configuration.

**Figure 2-63 Folder Structure**

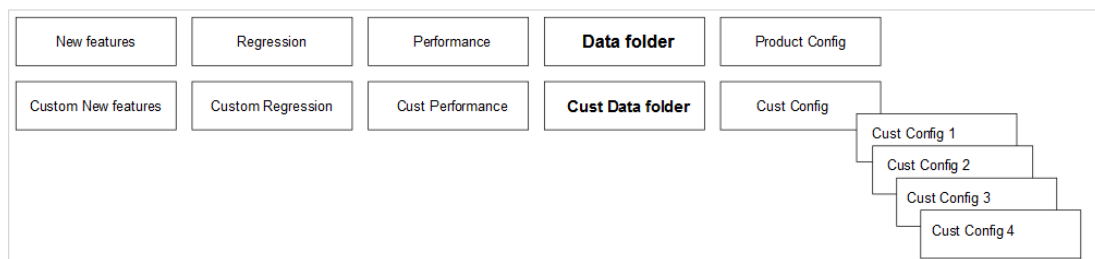

## 2.17.1 Running Test Cases

### Enable

Rename or copy the Cust Config [1/2/3/N] folder to the Cust Config folder in order for ATS to run the test cases with a specific custom configuration. When the option to run test cases with custom configuration is chosen, it always points to the Cust Config folder.

### To Run ATS Test Cases

ATS has the option to run test cases with default or custom configuration.

- If custom configuration is selected, then test cases from custom folders are populated on the ATS UI, and custom configuration is applied to them through the key-value pair per yaml file defined or present in the "Cust Config" folder.
- If product configuration is selected, then the test cases from product folders are populated on the ATS UI, and product configuration is applied to them through key-value pairs per yaml file defined or present in the Product Config folder.

Figure 2-64 ATS Execution Flow

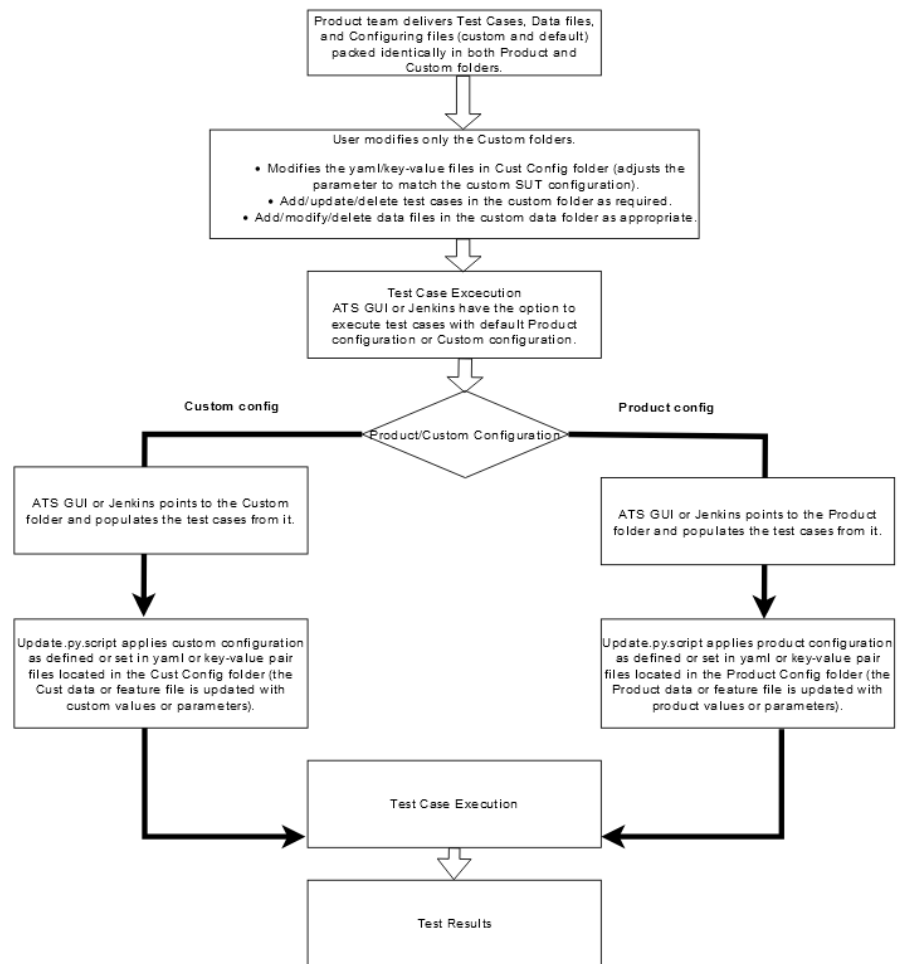


Figure 2-65 Sample: Configuration\_Type

**Oracle Communications Cloud Native Core**

**Automated Test Suite - POLICY**

**EXECUTION OPTIONS**

|                                  |                                      |                                                                                |                             |
|----------------------------------|--------------------------------------|--------------------------------------------------------------------------------|-----------------------------|
| <b>TestSuite</b><br>Regression   | <b>SUT</b><br>PCF                    | <b>Configuration_Type</b><br>Product_Config<br>Product_Config<br>Custom_Config | <b>FilterWithTags</b><br>No |
| <b>Include_NewFeatures</b><br>NO | <b>Fetch_Log_Upon_Failure</b><br>YES |                                                                                |                             |

## 2.18 PCAP Log Collection

PCAP Log Collection allows collecting the NF, SUT, or PCAP logs from the debug tool sidecar container. This feature can be integrated and delivered as a standalone or along with the Application Log Collection feature. For information, see [Application Log Collection](#).

### PCAP Log Integration


1. The Debug tool should be enabled on SUT Pods while deploying the NF. The name of the Debug container must be "tools".  
For example, in SCP, the debug tool should be enabled for all the SCP microservice pods.
2. Update the following parameters in the values.yaml file, under the resource section, with ATS minimum resource requirements:
  - a. CPU: 3
  - b. memory: 3Gi
3. On the home page, click any new feature or regression pipeline.
4. In the left navigation pane, click **Build with Parameters**.
5. Select **YES** from the **Fetch\_Log\_Upon\_Failure** drop-down menu.
6. If option **Log\_Type** is available, select value **PcapLog [Debug Container Should be Running]** for it.
7. Select **PcapLog [Debug Container Should be Running]** to activate PCAP Log Collection in ATS-NF.
8. After the build execution is complete, go into the ATS pod, then navigate to below path to find the pcaplogs: `.jenkins/jobs/<Pipeline Name>/builds/<build number>/`  
For example, `.jenkins/jobs/SCP-Regression/builds/5/`  
Pcaplogs is present in zip form. Unzip it to get the log files.

### 2.18.1 Application Log Collection and Parallel Test Execution Integration

A new stage, "Logging/Rerun", has been added at the end of the Execute-Tests stage to collect rerun logs, such as applog and PCAP logs, by running the failed test cases in a sequence.

**Figure 2-66 Logging/Rerun new stage**

Stage View

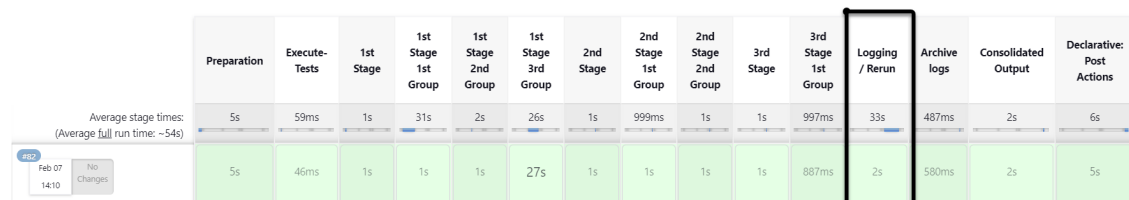

If the `Fetch_Log_Upon_Failure` parameter is set to YES and if any test case fails in the initial run, then:

- The failed test case reruns and log collection start in the Logging/Rerun stage after the initial run is completed for all the test cases.

- The logs from the initial execution are collected, but they might be incorrect.
- Even if the rerun parameter is set to 0, the failed test case reruns in the Logging/Rerun stage and the log is collected.

**Note**

Not applicable for all the NFs.

- If the `Fetch_Log_Upon_Failure` parameter is set to NO and if any test case fails in the initial run, then the failed test case rerun starts in the same stage after the initial execution is over for all the test cases in its group.

## 2.19 Persistent Volume for 5G ATS

The Persistent Volume (PV) feature allows ATS to retain historical build execution data, test cases, and ATS environment configurations.

### ATS Packaging When Using Persistent Volume

- **Without the Persistent Volume option:** ATS package includes an ATS image with test cases.
- **With Persistent Volume option:** ATS package includes the ATS image and test cases separately. The new test cases are provided between the releases.  
To support both with and without Persistent Volume options, test cases and execution job data are packaged in the ATS image as well as a tar file.

### 2.19.1 Processing Flow

#### First Time Deployment

Initially, when you deploy ATS, for example, the PI-A ATS pod, you use PVC-A, which is provisioned and mounted to the PI-A ATS pod. By default, PVC-A is empty. So, you have to copy the data (`ocslf_tests` and `jobs` folders) from the PI-A tar file to the pod after the pod is up and running. Then restart the PI-A pod. At this point, you can change the number of build logs to maintain in the ATS GUI.

#### Subsequent Deployments

When you deploy ATS for the subsequent time, for example, in a PI-B ATS pod, you use PVC-B, which is provisioned and mounted to the PI-B ATS pod. By default, the PVC-B is empty, and you have to copy the data (`ocslf_tests` and `jobs` folders) from the PI-B tar file to the pod after the pod is up and running. At this point, copy all the necessary changes to the PI-B pod from the PI-A pod and restart the PI-B pod. You can change the number of build logs to maintain in the ATS GUI. After updating the number of builds, you can delete the PI-A pod and continue to retain the PVC-A. If you do not want backward porting, you can delete PVC-A.

### 2.19.2 Deploying Persistent Volume

#### Preinstallation Steps for Non-OCI setup

1. Before deploying Persistent Volume, create a PVC in the same namespace where you have deployed ATS. You have to provide values for the following parameters to create a PVC:
  - PVC Name

- Namespace
  - Storage Class Name
  - Size of the PV
2. Run the following command to create a PVC:

```
kubectl apply -f - <<EOF

apiVersion: v1
kind: PersistentVolumeClaim
metadata:
  name: <Please Provide the PVC Name>
  namespace: <Please Provide the namespace>
  annotations:
spec:
  storageClassName: <Please Provide the Storage Class Name>
  accessModes:
    - ReadWriteOnce
  resources:
    requests:
      storage: <Please Provide the size of the PV>
EOF
```

**Note**

It is recommended to suffix the PVC name with the release version to avoid confusion during subsequent releases. For example: ocats-slf-pvc-1.9.0

The output of the above command with parameters is as follows:

```
[cloud-user@atscne-bastion-1 templates]$ kubectl apply -f - <<EOF
>
> apiVersion: v1
> kind: PersistentVolumeClaim
> metadata:
>   name: ocats-slf-1.9.0-pvc
>   namespace: ocslf
>   annotations:
> spec:
>   storageClassName: standard
>   accessModes:
>     - ReadWriteOnce
>   resources:
>     requests:
>       storage: 1Gi
> EOF
```

The persistentvolumeclaim/ocats-slf-1.9.0-pvc is created.



3. To verify whether PVC is bound to PV and is available for use, run the following command:

```
kubectl get pvc -n <namespace used for pvc creation>
```

The output of the above command is as follows:

**Figure 2-67 Verifying PVC**

```
[cloud-user@atscne-bastion-1 templates]$ kubectl get pvc -n ocslf
NAME                STATUS    VOLUME                                     CAPACITY   ACCESS MODES  STORAGECLASS  AGE
ocats-slf-1.9.0-pvc Bound     pvc-lee50daf-2eb7-4289-b541-51c111270513  1Gi        RWO           standard      8s
policy-pvc-test     Bound     pvc-d346d5c4-129e-4f13-8bd0-a7b7555e0e2f  1Gi        RWO           standard      31d
slf-pvc             Bound     pvc-0b0bce8c-b856-4e0e-b4d8-0f981250adbd  1Gi        RWO           standard      12d
```

Check that the STATUS is **Bound** and that the rest of the parameters, such as NAME, CAPACITY, ACCESS MODES, STORAGECLASS, and so on, are the same as specified in the PVC creation command.

#### Note

Do not proceed further if there is any issue with PVC creation. Contact your administrator to create a PV.

4. After creating persistent volume, change the following parameters in the values.yaml file to deploy persistent volume.
  - Set the **PVEnabled** parameter to "true".
  - Provide the value for the **PVClaimName** parameter. The PVClaimName value should be the same as the value used to create a PVC.

### Preinstallation Steps for OCI setup

1. Before deploying persistent volumes, create a PVC in the same namespace where you have deployed ATS. You have to provide values for the following parameters to create a PVC:
  - PVC Name
  - Namespace
  - Storage Class Name
  - Size of the PV
2. Run the following command to create a PVC:

```
kubectl apply -f - <<EOF

apiVersion: v1
kind: PersistentVolumeClaim
metadata:
  name: <Please Provide the PVC Name>
  namespace: <Please Provide the namespace>
  annotations:
spec:
  storageClassName: <Please Provide the Storage Class Name>
  accessModes:
    - ReadWriteOnce
```

```
resources:
  requests:
    storage: <Please Provide the size of the PV>
EOF
```

- When creating Persistent Volume Claim in OCI, add the storageClassName "oci-bv" and maintain the 50 gigabyte storage value.

#### Note

The minimum allowed value for parameter "resources.requests.storage" is 50Gi. If the storage is set to any value less than 50Gi, it will be ignored.

For example, the output of the above command with parameters is as follows:

```
[cloud-user@atscne-bastion-1 templates]$ kubectl apply -f - <<EOF
>
> apiVersion: v1
> kind: PersistentVolumeClaim
> metadata:
>   name: ocats-slf-1.9.0-pvc
>   namespace: ocslf
>   annotations:
> spec:
>   storageClassName: oci-bv
>   accessModes:
>     - ReadWriteOnce
>   resources:
>     requests:
>       storage: 50Gi
> EOF
```

The persistentvolumeclaim/ocats-slf-1.9.0-pvc is created.

- To verify whether PVC is bound to PV and is available for use, run the following command:

```
kubectl get pvc -n <namespace used for pvc creation>
```

The output of the above command is as follows:

**Figure 2-68 Verifying PVC**

```
[opc@operatorinstance Scripts]$ kubectl get pvc ocsepp3
```

| NAME                  | STATUS | VOLUME                                   | CAPACITY | ACCESS MODES | STORAGECLASS | AGE   |
|-----------------------|--------|------------------------------------------|----------|--------------|--------------|-------|
| ocats-sepp-24.1.0-pvc | Bound  | csl-48a73509-c08a-4ff1-ba2e-c2a6e1245cd9 | 50Gi     | RWO          | oci-bv       | 5m16s |

- After creating persistent volume, the STATUS will be Pending and when the ATS pod is deployed with that PVC, its status will become "BOUND".
- Change the following parameters in the values.yaml file to deploy persistent volume.
  - Set the **PVEnabled** parameter to "true".
  - Provide the value for the **PVClaimName** parameter. The PVClaimName value should be the same as the value used to create a PVC.

## Postinstallation Steps

1. After deploying ATS, copy the <nf\_main\_folder> and <jenkins jobs> folders from the tar file to their ATS pod, and then restart the pod as a one-time activity.

- a. Run the following command to extract the tar file:

```
ocats-<nf_name>-data-<release-number>.tgz
```

**Note**

The ats\_data.tar file is the name of the tar file containing <nf\_main\_folder> and jobs folders. It can be different for different NFs.

- b. Run the following set of commands to copy the required folders:

```
kubectl cp ats_data/jobs <namespace>/<pod-name>:/var/lib/  
jenkins/.jenkins/
```

```
kubectl cp ats_data/<nf_main_folder> <namespace>/<pod-name>:/var/lib/  
jenkins/
```

- c. Run the following command to restart the pods as one-time activity:

```
kubectl delete po <pod-name> -n <namespace>
```

**Note**

Before running the following command, copy the changes done on the new release pod from the old release pod using the `kubectl cp` command.  
**[Applicable in the case of subsequent deployment only]**

2. When the pod is up and running, log in to the ATS GUI and go to your NF specific pipeline. Click **Configure** in the left navigation pane. The **General** tab appears. Configure the **Discard old Builds** option. This option allows you to configure the number of builds you want to retain in the persistent volume.

**Figure 2-69 Discard Old Builds**

☒ Discard old builds ?

Strategy: Log Rotation

Days to keep builds:

if not empty, build records are only kept up to this number of days

Max # of builds to keep: 4

if not empty, only up to this number of build records are kept

Advanced...

**Note**

It is recommended to configure this option. If you do not input a value for this option, the application will take into account all builds, which could be a large number, and will completely consume the Persistent Volume.

## 2.19.3 Backward Porting

The following deployment steps apply to the old release of PVC-supported ATS Pod.

**Prerequisite:** You should have the old PVC that contains the old release of POD data.

**Note**

This procedure is for backward porting purposes only and should not be considered a subsequent release of the POD deployment procedure.

The deployment procedure for the old release PVC-supported ATS pod is the same; however, while deploying the ATS pod, you have to update the values.yaml file with the following:

- Change the **PVEnabled** parameter to "true".
- Provide the name of the old PVC as the value for parameter **PVClaimName**.

## 2.20 Single Click Job Creation

With the help of Single Click Job Creation feature, ATS users can easily create a job to run TestSuite with a single click.

### 2.20.1 Configuring Single Click Job

**Prerequisite:** The network function specific user should have 'Create Job' access.

Perform the following procedure to configure the single-click feature:

1. Log in to ATS using network function specific log-in credentials..
2. Click **New Item** in the left navigation pane of the ATS application. The following page appears:

Figure 2-70 New Item Window

3. In the **Enter an item name** text box, enter the job name. Example: <NF-Specific-name>-NewFeatures.
4. In the **Copy from** text box, enter the actual job name for which you need single-click execution functionality. Example: <NF-Specific-name>-NewFeatures.
5. Click **OK**. You are automatically redirected to edit the newly created job's configuration.
6. Under the **General** group, deselect the **This Project is Parameterised** option.
7. Under the **Pipeline** group, make the corresponding changes to remove the 'Active Choice Parameters' dependency.
8. Provide the default values for the **TestSuite**, **SUT**, **Select\_Option**, **Configuration\_Type**, and other parameters, as required, on the **BuildWithParameters** page.  
Example: Pipeline without Active Choice Parameter Dependency

```
node ('built-in'){
  //a = SELECTED_NF      b = PCF_NAMESPACE      c = PROMSVC_NAME      d
= GOSTUB_NAMESPACE
  //e = SECURITY        f = PCF_NFINSTANCE_ID   g = POD_RESTART_TIME   h
= POLICY_TIME
  //i = NF_NOTIF_TIME   j = RERUN_COUNT        k =INITIALIZE_TEST_SUITE
l = STUB_RESPONSE_TO_BE_SET
  //m = POLICY_CONFIGURATION_ADDITION          n = POLICY_ADDITION
o = NEXT_MESSAGE
  //p = PROMSVCIP       q = PROMSVCPORT        r = TIME_INT_POD_DOWN    s
= POD_DOWN_RETRIES
  //t = TIME_INT_POD_UP   u = POD_UP_RETRIES   v = ELK_WAIT_TIME    w =
ELK_HOST
  //x = ELK_PORT        y = STUB_LOG_COLLECTION z = LOG_METHOD A =
enable_snapshot B = svc_cfg_to_be_read C = PCF_API_ROOT
```

```

//Description of Variables:

//SELECTED_NF : PCF
//PCF_NAMESPACE : PCF Namespace
//PROMSVC_NAME : Prometheus Server Service name
//GOSTUB_NAMESPACE : Gostub namespace
//SECURITY : secure or unsecure
//PCF_NFINSTANCE_ID : nfInstanceId in PCF application-config config map
//POD_RESTART_TIME : Greater or equal to 60
//POLICY_TIME : Greater or equal to 120
//NF_NOTIF_TIME : Greater or equal to 140
//RERUN_COUNT : Rerun failing scenario count
//TIME_INT_POD_DOWN : The interval after which we check the POD status
if its down
//TIME_INT_POD_UP : The interval after which we check the POD status
if its UP
//POD_DOWN_RETRIES : Number of retry attempt in which will check the
pod down status
//POD_UP_RETRIES : Number of retry attempt in which will check the
pod up status
//ELK_WAIT_TIME : Wait time to connect to Elastic Search
//ELK_HOST : Elastic Search HostName
//ELK_PORT : Elastic Search Port
//STUB_LOG_COLLECTION : To Enable/Disable Stub logs collection
//LOG_METHOD : To select Log collection method either elasticsearch or
kubernetes
//enable_snapshot: Enable or disable snapshots that are created at the
start and restored at the end of each test run
//svc_cfg_to_be_read: Timer to wait for importing service
configurations
//PCF_API_ROOT: PCF_API_ROOT information to set Ingress gateway
service name and port
withEnv([
'TestSuite=NewFeatures',
'SUT=PCF',
'Select_Option=All',
'Configuration_Type=Custom_Config'
]){
sh '''
    sh /var/lib/jenkins/ocpcf_tests/preTestConfig-NewFeatures-PCF.sh \
    -a PCF \
    -b ocpcf \
    -c occne-prometheus-server \
    -d ocpcf \
    -e unsecure \
    -f fe7d992b-0541-4c7d-ab84-c6d70b1b0123 \
    -g 60 \
    -h 120 \
    -i 140 \
    -j 2 \
    -k 0 \
    -l 1 \
    -m 1 \
    -n 15 \
    -o 1 \
    -p occne-prometheus-server.occne-infra\

```

```

-q 80\
-r 30\
-s 5\
-t 30\
-u 5\
-v 0\
-w occne-elastic-elasticsearch-master.occne-infra\
-x 9200\
-y yes\
-z kubernetes\
-A no\
-B 15\
-C ocpcf-occpn-ingress-gateway:80\

...
load "/var/lib/jenkins/ocpcf_tests/jenkinsData/Jenkinsfile-Policy-
NewFeatures"
}
}

```

9. Click **Save**. The ATS application is ready to run TestSuite with 'SingleClick' using the newly created job.

## 2.21 Support for ATS Deployment in OCI

Oracle Cloud Infrastructure (OCI) is a set of complementary cloud services that enable you to build and run a range of applications and services in a highly-available, consistently high-performance environment. OCI offers powerful computing capabilities and storage capacity in a flexible virtual network that can be accessed from your on-premises network.

OCI infrastructure consists of Compartments, Network Load balancer, Bastion Host, Dynamic Routing Gateway (DRG), Remote Peering Connection (RPC), Service Gateway, Internet Gateway, and Oracle Kubernetes Engine (OKE) cluster, all in an OKE VCN.

ATS deployment is also supported in OCI.

### 2.21.1 Accessing ATS GUI in OCI

The following two ways are supported to access the ATS GUI in OCI:

#### Using Loadbalancer IP

1. Add proper Ingress or Egress security rules for ports (8080/8443) and ATS service Node port in loadbalancer (nf\_lb\_subnet) and Node subnet (nf\_node\_subnet). To add ingress and egress security rules, see the [Adding Ingress and Egress Rules to Access the OCI Console](#).
2. Insert the following annotations under the **Metadata** section in ATS service object to assign an external IP (Loadbalancer IP):

```

oci-network-load-balancer.oraclecloud.com/security-list-management-mode:
None
oci.oraclecloud.com/load-balancer-type: nlb

```

**Note**

This can be done by editing and saving ATS service object after ATS deployment:  
For example,

```
kubectl edit svc ats-service-name -n ats-namespace
```

3. Access the GUI using URL: <http/https>://<Loadbalancer IP>:<8080/8443>

**Note**

- To open ATS GUI with https (TLS enabled), Load balancer IP must be known before deployment and listed down in the alt\_names section of the ssl.conf file while generating the application or client certificate. Otherwise, the ATS GUI will open, but it will show "Not Secure" in the browser address bar. For more information, see the [Support for Transport Layer Security](#) section.
- The assignment of Loadbalancer IP to the ATS service is subject to availability. If the Loadbalancer IP is not assigned to the ATS service even after applying the required annotations, try to debug on the OCI side.

**Using Tunneling**

1. Add an ingress security rule for the node subnet (nf\_node\_subnet) to allow TCP traffic on all ports from the operator subnet. To add ingress and egress security rules, see the [Adding Ingress and Egress Rules to Access the OCI Console](#) section.
2. Run the following command from a bash terminal on your local PC:

```
ssh -f -N -i <operator instance private key> -o StrictHostKeyChecking=no -o ProxyCommand="ssh -i <bastion private key> -o StrictHostKeyChecking=no -W %h:%p <bastion username>@<bastion IP>" <operator instance username>@<operator instance IP> -L <local PC port>:<Worker Node IP>:<ATS NodePort> -o ServerAliveInterval=60 -o ServerAliveCountMax=300
```

3. Access the GUI using URL: <http/https>://<localhost/127.0.0.1>:<local PC port>  
For example, ssh -f -N -i id\_rsa -o StrictHostKeyChecking=no -o ProxyCommand="ssh -i id\_rsa -o StrictHostKeyChecking=no -W %h:%p opc@129.287.66.123" opc@10.1.76.7 -L 5009:10.9.60.118:32071 -o ServerAliveInterval=60 -o ServerAliveCountMax=300

Here, ATS GUI URL is http://localhost:5009

## 2.21.2 Adding Ingress and Egress Rules to Access the OCI Console

Perform the following procedure to add ingress and egress rules:

1. Log in to the OCI Console using your login credentials.
2. On the OCI Console Dashboard, click **Navigation menu**.



Figure 2-71 Navigation menu



- Click **Networking**, and then click **Virtual cloud networks** on the preview pane.

Figure 2-72 Virtual cloud networks

- Click the required OKE cluster VCN.  
A list of all subnets in that VCN is displayed.
- Save the value of the "IPv4 CIDR Block" field for **nf\_lb\_subnet**.  
This information can be used in the subsequent steps as value of <CIDR for Load balancer subnet>.
- Save the value of the "IPv4 CIDR Block" field for **nf\_node\_subnet**.  
This information can be used in the subsequent steps as value of <CIDR for Node subnet>.

### Updating Security List for Node Subnet

- To update security list for Node subnet, do the following:
  - Navigate to **nf\_node\_subnet**, and then to **nf\_node\_security\_list**.
  - Click **Add Ingress Rules**.

Figure 2-73 Add Ingress Rules

- Add ingress rule if it is unavailable to access the OCI Console in **nf\_node\_subnet** as described in the following table:

Table 2-10 Adding Ingress Rules for Node Subnet

| Option Name            | Description                                                                                                                                                                  |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source Type            | Indicates the source type.<br>Value: CIDR                                                                                                                                    |
| Source CIDR            | Indicates the source of CIDR.<br>Value: <CIDR for Load balancer subnet><br><b>Note:</b> The value for the variable <CIDR for Node subnet> was determined in a previous step. |
| IP Protocol            | Indicates the internet protocol for which this rule is applicable.<br>Value: TCP                                                                                             |
| Source Port Range      | Keep this option at its default value.                                                                                                                                       |
| Destination Port Range | Keep this option at its default value.                                                                                                                                       |
| Description            | Keep this option at its default value.                                                                                                                                       |

**Note**

To access ATS API, you can use the above mentioned ingress rule.

**Updating Security List for Load Balancer Subnet**

1. To update security list for Load balancer subnet, do the following:
  - a. Navigate to **nf\_lb\_subnet**, and then to **nf\_lb\_security\_list**.
  - b. Click **Add Ingress Rules**.
  - c. Add ingress rule if it is unavailable to access the OCI Console in **nf\_lb\_subnet** by configuring the options as described in the following table:

Table 2-11 Adding Ingress Rules Load Balancer Subnet

| Option Name            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source Type            | Indicates the source type.<br>Value: CIDR                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Source CIDR            | Indicates the source of CIDR.<br>Value: <CIDR for Network which will be used to access ATS GUI><br><b>Note:</b> Avoid setting its value to 0.0.0.0/0, as it may result in granting access to ATS GUI from all networks, posing a considerable security risk.<br>If you intend for ATS GUI to only be accessible within the Corporate Proxy (VPN), using a Source CIDR value of 0.0.0.0/0 would allow access from outside the Corporate Proxy (VPN) as well. |
| IP Protocol            | Indicates the internet protocol for which this rule is applicable.<br>Value: TCP                                                                                                                                                                                                                                                                                                                                                                            |
| Source Port Range      | Keep this option at its default value.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Destination Port Range | Indicates the ATS GUI port number. Port 8080 is used for HTTP and 8443 is used for HTTPS.<br>Value: <ATS service Port>                                                                                                                                                                                                                                                                                                                                      |
| Description            | Keep this option at its default value.                                                                                                                                                                                                                                                                                                                                                                                                                      |

- d. To access ATS API, create one more ingress rule if it is unavailable by following the previous step with the following changes:

- In the **Source CIDR** option, provide the <CIDR for Network which will be used to access ATS API> value.
  - In the **Destination Port Range** option, provide the <ATS Service API Port> value, which refers to the ATS API port, that is, 5001.
2. To add egress rule if it is unavailable to access the OCI Console in **nf\_lb\_subnet**, do the following:
    - a. In the left navigation pane, click **Egress Rules**.
    - b. Click **Add Egress Rules**.
    - c. Configure the following options as described in this table:

**Table 2-12 Adding Egress Rules Load Balancer Subnet**

| Option Name                   | Description                                                                                                                                                                |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Destination Type</b>       | Indicates the destination type.<br>Value: CIDR                                                                                                                             |
| <b>Destination CIDR</b>       | Indicates the destination of CIDR.<br>Value: <CIDR for Node subnet><br><b>Note:</b> The value for the variable <CIDR for Node subnet> was determined in the previous step. |
| <b>IP Protocol</b>            | Indicates the internet protocol for which this rule is applicable.<br>Value: TCP                                                                                           |
| <b>Source Port Range</b>      | Keep this option at its default value.                                                                                                                                     |
| <b>Destination Port Range</b> | Keep this option at its default value.                                                                                                                                     |
| <b>Description</b>            | Keep this option at its default value.                                                                                                                                     |

**Note**

To access ATS API, you can use the above mentioned egress rule.

**Updating Security List for Tunneling**

1. Log in to the OCI Console using your login credentials.
2. On the OCI Console Dashboard, click **Navigation menu**.

**Figure 2-74 Navigation menu**

3. Click **Networking**, and then click **Virtual cloud networks** on the preview pane.
4. Click the required OKE cluster VCN.  
A list of all subnets in that VCN is displayed.
5. Save the value of the "IPv4 CIDR Block" field for **nf\_operator\_subnet**.  
This information can be used in the subsequent steps as value of <CIDR for Operator subnet>.

### Updating Security list of Node Subnet

1. To update security list of Node subnet, do the following:
  - a. Navigate to **nf\_node\_subnet**, and then to **nf\_node\_security\_list**.
  - b. Click **Add Ingress Rules**.
  - c. Add ingress rule if it is unavailable to access the OCI Console in **nf\_node\_subnet** by configuring the options as described in the following table:

**Table 2-13 Adding Ingress Rules for Node Subnet Tunneling**

| Option Name            | Description                                                                                                                                                                   |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source Type            | Indicates the source type.<br>Value: CIDR                                                                                                                                     |
| Source CIDR            | Indicates the source of CIDR.<br>Value: <CIDR for Operator subnet><br><b>Note:</b> The value for the variable <CIDR for Operator subnet> was determined in the previous step. |
| IP Protocol            | Indicates the internet protocol for which this rule is applicable.<br>Value: TCP                                                                                              |
| Source Port Range      | Keep this option at its default value.                                                                                                                                        |
| Destination Port Range | Keep this option at its default value.                                                                                                                                        |
| Description            | Keep this option at its default value.                                                                                                                                        |

**Note**

To access ATS API, you can use the above mentioned ingress rule.

## 2.22 Support for Transport Layer Security

Currently, ATS is accessible through HTTP, which can raise security risks.

With the support of the TLS feature, Jenkins servers have been upgraded to support HTTPS, ensuring a secure and encrypted connection when accessing the ATS dashboard.

To provide encryption, HTTPS uses an encryption protocol known as Transport Layer Security (TLS), which is a widely accepted standard protocol that provides authentication, privacy, and data integrity between two communicating computer applications.

Now, users can access the ATS GUI with the HTTPS protocol instead of the previously used HTTP protocol.

**Figure 2-75 Access with TLS**

← → ↻ https://100.77.50.249:31311/login?from=%2F Guest

**Oracle Communications Cloud Native Core - Automated Test Suite**

Welcome to ATS!

Username

Password

☐ Keep me signed in

**Sign in**

**Note**

If this feature is not enabled before installation, HTTP will continue to operate.

## 2.22.1 Deploy ATS with TLS Enabled

Follow the steps in this section to create a Java KeyStore (JKS) file and enable the ATS GUI with HTTPS during installation.

### 2.22.1.1 Generate JKS File for Jenkins Server

A JKS file needs to be created in order for Jenkins to provide ATS GUI access through HTTPS.

Perform the following steps to generate a JKS file:

#### Generate the Root Certificate

If a root certificate, for example, `caroot.cert`, is not already available, a user can generate one. Users may use their own files if they have a CA-signed root certificate and key or their own root certificates. The root certificate is used to sign the application, or ATS certificate.

Follow the steps to create and use self-signed certificates:

1. Generate a root key with the following command:

```
openssl genrsa 2048 > <path_to_root_key>
```

For example,

```
openssl genrsa 2048 > caroot.key
```

2. Generate a "caroot" certificate with the following command:

```
openssl req -new -x509 -nodes -days 1000 -key
    <path_to_root_key> > <path_to_root_certificate>
```

For example,

```
[cloud-user@star23-bastion-1 cert]$ openssl req -new -x509 -nodes -days
1000 -key caroot.key > caroot.cer
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [XX]:IN
State or Province Name (full name) []:KA
Locality Name (eg, city) [Default City]:BLR
Organization Name (eg, company) [Default Company Ltd]:ORACLE
Organizational Unit Name (eg, section) []:CGBU
Common Name (eg, your name or your server's hostname) []:ocats
Email Address []:
[cloud-user@star23-bastion-1 cert]$
```

### Generate Application or Client Certificate

Follow the steps to create and edit the `ssl.conf` file:

1. In the **alt\_names** section, list the IPs, such as IP.1, IP.2, and so on, that are used to access the ATS GUI:

```
[ req ]
default_bits          = 4096
distinguished_name    = req_distinguished_name
req_extensions        = req_ext

[ req_distinguished_name ]
countryName           = Country Name (2 letter code)
countryName_default   = <Country_Name>
stateOrProvinceName   = State or Province Name (full name)
stateOrProvinceName_default = <State_Name>
localityName          = Locality Name (eg, city)
localityName_default  = <Locality_Name>
organizationName      = Organization Name (eg, company)
organizationName_default = <Org_Name>
commonName            = Common Name (e.g. server FQDN or YOUR name)
commonName_max        = 64
commonName_default    = <helm_name>.<namespace>.svc.cluster.local

[ req_ext ]
keyUsage = critical, digitalSignature, keyEncipherment
extendedKeyUsage = serverAuth, clientAuth
basicConstraints = critical, CA:FALSE
subjectAltName = critical, @alt_names
```

```
[alt_names]
IP.1 = 127.0.0.1
IP.2 = <IP1>
IP.3 = <IP2>
DNS.1 = <helm_name>.<namespace>.svc.cluster.local
```

For example,

```
[ req ]
default_bits          = 4096
distinguished_name = req_distinguished_name
req_extensions        = req_ext

[ req_distinguished_name ]
countryName           = Country Name (2 letter code)
countryName_default   = <Country_Name>
stateOrProvinceName   = State or Province Name (full name)
stateOrProvinceName_default = <State_Name>
localityName          = Locality Name (eg, city)
localityName_default  = <Locality_Name>
organizationName      = Organization Name (eg, company)
organizationName_default = <Org_Name>
commonName            = Common Name (e.g. server FQDN or YOUR name)
commonName_max        = 64
commonName_default    = ocats.scpsvc.svc.cluster.local

[ req_ext ]
keyUsage = critical, digitalSignature, keyEncipherment
extendedKeyUsage = serverAuth, clientAuth
basicConstraints = critical, CA:FALSE
subjectAltName = critical, @alt_names

[alt_names]
IP.1 = 127.0.0.1
IP.2 = 10.75.217.5
IP.3 = 10.75.217.76
DNS.1 = localhost
DNS.2 = ocats.scpsvc.svc.cluster.local
```

### Note

- To access the GUI with DNS, make sure that the commonName\_default is the same as the DNS name being used.
  - The /etc/hosts file in the local system should also be updated with the assigned IP and the DNS mentioned above to open the ATS with DNS. Otherwise, it is not required.
- Ensure the DNS is in this format:  
<service\_name>.<namespace>.svc.cluster.local
- Multiple DNSs, such as DNS.1, DNS.2, and so on, can be added.
- To support the ATS API, add the IP 127.0.0.1 to the list of IPs.

2. Create a Certificate Signing Request (CSR) with the following command:

```
openssl req -config ssl.conf -newkey rsa:2048 -days 1000 -nodes -keyout
<path_to_application_certificate_key> >
<path_to_certificate_signing_request>
```

For example,

```
[cloud-user@star23-bastion-1 cert]$ openssl req -config ssl.conf -newkey
rsa:2048 -days 1000 -nodes -keyout rsa_private_key_pkcs1.key >
ssl_rsa_certificate.csr
Ignoring -days; not generating a certificate
Generating a RSA private key
...+++++
.....+++++
writing new private key to 'rsa_private_key_pkcs1.key'
-----
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [IN]:
State or Province Name (full name) [KA]:
Locality Name (eg, city) [BLR]:
Organization Name (eg, company) [ORACLE]:
Common Name (e.g. server FQDN or YOUR name) [ocats]:
[cloud-user@star23-bastion-1 cert]$
```

3. Use the command to display the components of the file and verify the configurations:

```
openssl req -text -noout -verify -in
ssl_rsa_certificate.csr
```

4. Sign in to this CSR file with the root certificate:

```
openssl x509 -extfile ssl.conf -extensions req_ext -req -in
<path_to_certificate_signing_request> -days 1000 -CA
<path_to_root_certificate> -CAkey <path_to_root_key> -set_serial 04 >
<path_to_application_certificate>
```

For example,

```
[cloud-user@star23-bastion-1 cert]$ openssl x509 -extfile ssl.conf -
extensions req_ext -req -in ssl_rsa_certificate.csr -days 1000 -CA ../
caroot.cer -CAkey ../caroot.key -set_serial 04 > ssl_rsa_certificate.crt
Signature ok
subject=C = IN, ST = KA, L = BLR, O = ORACLE, CN = ocats
Getting CA Private Key
[cloud-user@star23-bastion-1 cert]$
```



5. Use the command to verify that the certificate is properly signed by the root certificate:

```
openssl verify -CAfile <path_to_root_certificate>
               <path_to_application_certificate>
```

For example,

```
[cloud-user@star23-bastion-1 cert]$ openssl verify -CAfile caroot.cer
ssl_rsa_certificate.crt
ssl_rsa_certificate.crt: OK
```

6. Save the generated application certificates and the root certificates.
7. Add the caroot.cer to the browser as a trusted author. For more information, see [Enable ATS GUI with HTTPS](#)
8. Generate the .p12 keystore file with the following command:

```
openssl pkcs12 -inkey <path_to_application_key> -in
               <path_to_application_certificate> -export -out <path_to_p12_certificate>
```

For example,

```
[cloud-user@star23-bastion-1 ocats]$ openssl pkcs12 -inkey
rsa_private_key_pkcs1.key -in ssl_rsa_certificate.crt -export -out
certificate.p12
Enter Export Password:
Verifying - Enter Export Password:
```

9. In the prompt, create a password and save it for future use.
10. Convert the .p12 keystore file into a JKS format file:

```
keytool -importkeystore -srckeystore <path_to_p12_certificate> -
srcstoretype pkcs12 -destkeystore <path_to_jks_file> -deststoretype JKS
```

For example,

```
[cloud-user@star23-bastion-1 cert]$ keytool -importkeystore -srckeystore ./
certificate.p12 -srcstoretype pkcs12 -destkeystore jenkinsserver.jks -
deststoretype JKS
Importing keystore ./certificate.p12 to jenkinsserver.jks...
Enter destination keystore password:
Re-enter new password:
Enter source keystore password:
Entry for alias 1 successfully imported.
Import command completed: 1 entries successfully imported, 0 entries
failed or cancelled
```

11. In the prompt, use the same password used while creating .p12 keystore file.

**Note**

Verify that the passwords linked to the .p12 keystore and JKS files are the same.

12. The generated file, `jenkinserver.jks`, is provided to the Jenkins server.

## 2.22.1.2 Enable ATS GUI with HTTPS

Follow the steps to secure or enable TLS on the server.

1. Create a Kubernetes secret by adding the above created files:

```
kubectl create secret generic <secret_name> --from-file=<path_to_jks_file>
--from-file=<path_to_application_certificate> --from-
file=<path_to_application_key> --from-file=<path_to_root_certificate> -n
<namespace>
```

For example,

```
kubectl create secret generic ocats-tls-secret --from-
file=jenkinsserver.jks --from-file=ssl_rsa_certificate.crt --from-
file=rsa_private_key_pkcs1.key --from-file=caroot.cer -n scpsvc
```

Where,

**jenkinsserver.jks:** This file is needed when `atsGuiTLSEnabled` is set to true. This is necessary to open ATS GUI with secured TLS protocol.

**ssl\_rsa\_certificate.crt:** This is client application certificate.

**rsa\_private\_key\_pkcs1.key:** This is RSA private key.

**caroot.cer:** This file used during creation of jks file needs to be passed for Jenkins/ATS API communication.

The sample of created secret:

```
[cloud-user@star23-bastion-1 cert]$ kubectl describe secret ocats-tls-
secret -n scpsvc
```

```
Name:          ocats-tls-secret
Namespace:     scpsvc
Labels:        <none>
Annotations:   <none>
```

Type: Opaque

Data

====

```
caroot.cer:          1147 bytes
ssl_rsa_certificate.crt: 1424 bytes
jenkinsserver.jks:   2357 bytes
rsa_private_key_pkcs1.key: 1675 bytes
```

2. Apply the following changes in values.yaml file.

```
certificates:
  cert_secret_name: "ocats-tls-secret"
  ca_cert: "caroot.cer"
  client_cert: "ssl_rsa_certificate.crt"
  private_key: "rsa_private_key_pkcs1.pem"
  jks_file: "jenkinsserver.jks"
  jks_password: "123456" #This is the password given to the jks file
while creation.
```

The user can install the ATS, using the helm install command. Change the atsGuiTLSEnabled Helm parameter value to true for ATS to get the certificates and support HTTPS for GUI.

3. A user can now start ATS with HTTPS the protocol.  
The link to open the ATS GUI format is https://<IP>:<port>, for example, https://10.75.217.25:30301

The lock symbol in the browser indicates that the server is secured or TLS enabled.

### Adding a Certificate in Browser

The created root certificate is added to the browser, either Mozilla Firefox or Chrome.

#### ① Note

Future versions of these browsers may involve different menu options. For more information on importing root certificate, see the browser documentation to add a self-signed certificate to the browser as a trusted certificate.

Adding in Windows laptops

1. In the Chrome browser, navigate to the settings and search for security.
2. Click the **security** option that appears next to search.
3. Click the **Manage Device Certificate** option. The Certificate window opens.
4. Click the Trusted root certification authorities bar.
5. Import the caroot certificate.
6. Save and restart the browser.

Adding in Mac laptop

1. In the Chrome browser, navigate to the settings and search for security.
2. Click the **security** option that appears next to search.
3. Click the **Manage Device Certificate** option. The Keychain Access window opens.
4. Search the tab certificate and drag and drop the downloaded caroot certificate.
5. Find the uploaded certificate in the list, usually listed by a temporary name.
6. Double click the certificate and expand the Trust option.
7. In **When using this certificate** option, assign it to "always trust".

8. Close the window and validate if it asks for the password.
9. Save and restart the browser.

Adding for Windows and Mac laptop

1. In the Mozilla Firefox browser, navigate to the settings and search for certificates.
2. Click the **View Certificate** that appears next to search. This opens a Certificate Manager window.
3. Navigate to the Authorities section, click the **Import** button, and upload the caroot certificate.
4. Click the **Trust** options in the pop-up window and click OK.
5. Save and restart the browser.

## 2.23 Test Results Analyzer

The Test Results Analyzer is a plugin available in ATS to view pipeline test results based on XML reports. It provides the test results report in a graphical format, which includes consolidated and detailed stack trace results in case of any failures. It allows you to navigate to each and every test.

The test result report shows any one of the following statuses for each test case:


- **PASSED:** If the test case passes.
- **FAILED:** If the test case fails.
- **SKIPPED:** If the test case is skipped.
- **N/A:** If the test cases are not executed in the current build.

### 2.23.1 Accessing Test Results Analyzer Feature

To access the test results analyzer feature:

1. From the NF home page, click any new feature pipeline or regression pipeline where you want to run this plugin.
2. In the left navigation pane, click **Test Results Analyzer**.

Figure 2-76 Test Results Analyzer Option

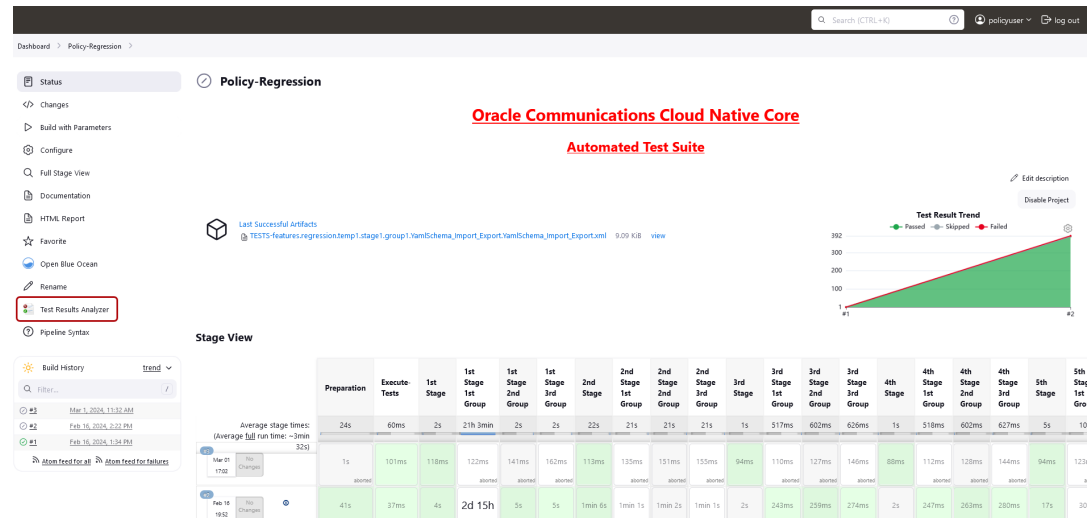

When the build completes, the test result report appears. A sample test result report is shown below:

Figure 2-77 Sample Test Result Report

| Chart                    | Package/Class/Testmethod                                                                                                                                                                       | Passed      | Transitions | 5      | 4      | 3       | 2       | 1   |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|--------|--------|---------|---------|-----|
| <input type="checkbox"/> | features.cust_newfeatures.temp1.Binding_Service.Binding_Service                                                                                                                                | 0% (0%)     | 0           | FAILED | N/A    | N/A     | N/A     | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.Bulk_Import_Export.Bulk_Import_Export                                                                                                                          | 100% (100%) | 0           | PASSED | PASSED | SKIPPED | SKIPPED | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.Diameter_GW_Error_Handling.Diameter_GW_Error_Handling                                                                                                          | 0% (0%)     | 0           | FAILED | N/A    | N/A     | N/A     | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.Dynamic_Policy_Override.Dynamic_Policy_Override.This feature aims to dynamically override the parameters of pcc and session rules during SM Policy Association | 100% (100%) | 0           | PASSED | PASSED | SKIPPED | SKIPPED | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.IMS_Emergency_Call.IMS_Emergency_Call                                                                                                                          | 0% (0%)     | 0           | FAILED | N/A    | N/A     | N/A     | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.Operators.Operators                                                                                                                                            | 0% (0%)     | 0           | FAILED | N/A    | N/A     | N/A     | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.PolicyActionForBulkPccRuleRemoval.Policy_Action_Bulk_Pccrule_Removal                                                                                           | 100% (100%) | 0           | PASSED | PASSED | SKIPPED | SKIPPED | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.Policy_Conditions_And_Actions.Policy_Conditions_And_Actions                                                                                                    | 0% (0%)     | 0           | FAILED | N/A    | N/A     | N/A     | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.Policy_Table.Policy_Table                                                                                                                                      | 100% (100%) | 0           | PASSED | PASSED | PASSED  | SKIPPED | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.Request_AVP.Request_AVP                                                                                                                                        | 0% (0%)     | 0           | FAILED | N/A    | N/A     | N/A     | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.Sanity.Sanity                                                                                                                                                  | 0% (0%)     | 0           | FAILED | N/A    | N/A     | N/A     | N/A |
| <input type="checkbox"/> | features.cust_newfeatures.temp1.SessionRetry.SessionRetry.To verify that SM or User-service retry to alternate FQDN if the                                                                     | 0% (0%)     | 0           | FAILED | FAILED | SKIPPED | FAILED  | N/A |

- Click any one of the statuses (PASSED, FAILED, SKIPPED) to view the respective feature detail status report.

### Note

For N/A status, a detailed status report is not available.

Figure 2-78 Test Result


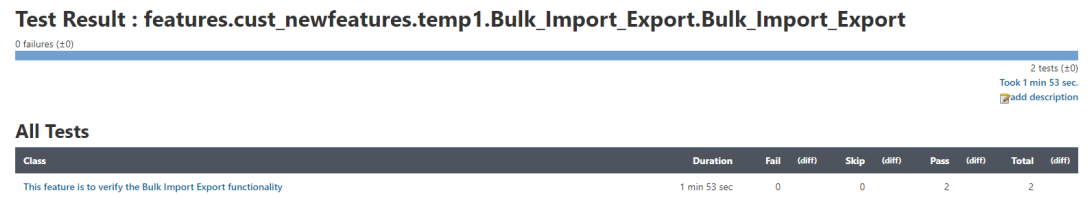


Figure 2-79 Test Result

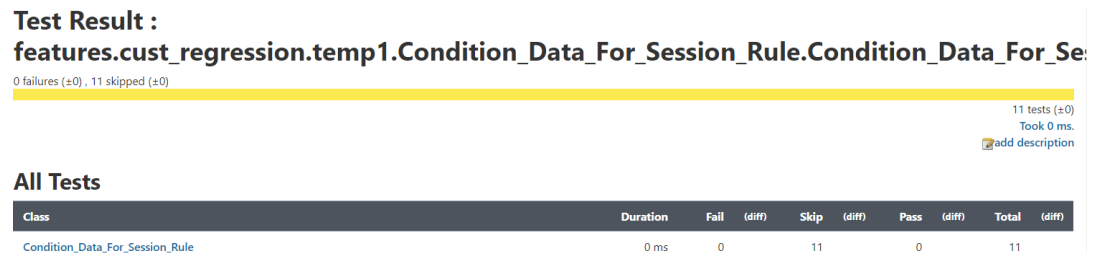

4. In the case of a rerun, the test cases that passed in the initial run but were skipped in the rerun are considered "passed" in the Test Results Analyzer Report. The following screenshot depicts the scenario: "Variant2\_equal\_smPolicySnssaiData,Variant2\_exist\_smPolicyData,Variant2\_exist\_smPolicyDnnData\_dnn" where the test cases passed in the initial run but skipped in the rerun are considered "passed" in general.

Figure 2-80 Test Results

|                          |                                            |             |   |        |
|--------------------------|--------------------------------------------|-------------|---|--------|
| <input type="checkbox"/> | Variant2_UDR                               | 13% (20%)   | 2 | FAILED |
| <input type="checkbox"/> | Variant2_Multi_Block_In_Different_Position | 0% (0%)     | 0 | FAILED |
| <input type="checkbox"/> | Variant2_contain_smPolicyData              | 0% (0%)     | 0 | FAILED |
| <input type="checkbox"/> | Variant2_contain_smPolicyDnnData_dnn       | 0% (0%)     | 0 | FAILED |
| <input type="checkbox"/> | Variant2_contain_smPolicySnssaiData        | 0% (0%)     | 0 | FAILED |
| <input type="checkbox"/> | Variant2_equal_smPolicyDnnData_dnn         | 0% (0%)     | 0 | FAILED |
| <input type="checkbox"/> | Variant2_equal_smPolicySnssaiData          | 100% (100%) | 0 | PASSED |
| <input type="checkbox"/> | Variant2_exist_smPolicyData                | 100% (100%) | 0 | PASSED |
| <input type="checkbox"/> | Variant2_exist_smPolicyDnnData_dnn         | 100% (100%) | 0 | PASSED |
| <input type="checkbox"/> | Variant2_exist_smPolicySnssaiData          | 0% (0%)     | 0 | FAILED |

5. Click **PASSED**. The following highlighted message means the test case was passed in the main run but skipped in the rerun.

Figure 2-81 Test Result Info

**Passed**

features.cust\_regression.temp1.Variant2.Variant2.Variant2\_UDR.Variant2\_equal\_smPolicySnssaiData

**Standard Output**

Passed in Initial Run, hence Skipped here. Please see console logs for more information

```
@scenario.begin

@Variant2_equal_smPolicySnssaiData
Scenario: Variant2_equal_smPolicySnssaiData
  Given Initialize Test Suite ... skipped in 0.000s
  Then Waiting for test_suite_to_initialize ... skipped in 0.000s
  Then Wait 5 ... skipped in 0.000s

@scenario.end
```

## 2.24 Support for Test Case Mapping and Count

The Test Case Mapping and Count feature displays the total number of features, test cases, or scenarios and their mapping to each feature in the ATS GUI.

### 2.24.1 Access Test Case Mapping and Count Feature

1. On the NF home page, click any new feature or regression pipeline where you want to use this feature.
2. In the left navigation pane, click **Build with Parameters**.
3. On the FEATURE AND TESTCASES section, click **All** from the Features drop-down menu to view the TestCases details mapped to each feature.

Figure 2-82 Test Case Mapping

**Oracle Communications Cloud Native Core**  
**Automated Test Suite - POLICY**

**EXECUTION OPTIONS**

TestSuite: NewFeatures SUT: PC2 Configuration\_Type: Product\_Config FilterWithTags: No

Include\_Regression: NO Fetch\_Log\_Upon\_Failure: YES

**FEATURES AND TESTCASES**

Features: All

Stage: stage1

- Group: group1
  - Bulwark\_Support\_SM\_Create\_Delete\_UpdateNotify\_PDSNotification\_RedCap\_verify
  - internal\_SM\_Multi\_ServerHeader\_with\_Retry\_using\_SCP
- Group: group2
  - Pending\_Transaction\_N7\_Fast\_Lock\_Bulwark
- Group: group3
  - internal\_max\_rx\_session

TestCases: All

Total Features are: 6 & TestCases are: 17

Stage: stage1 Group: group1

- Bulwark\_Support\_SM\_Create\_Delete\_UpdateNotify\_PDSNotification\_RedCap\_verify
- Bulwark\_CHF\_UDR\_notification\_RedCap\_verify
- internal\_Binding\_Header\_AMPolicy\_Svcname\_nf\_instance
- internal\_SM\_Multi\_ServerHeader\_with\_Retry\_using\_SCP
- internal\_SM\_Rx\_AAR-L\_without\_MCD

reverting\_pds\_settings

**Build** **Cancel**

- Click **Select** from the **Features** drop-down menu to view the the test cases details.

Figure 2-83 Test Cases Details When Select a Single/MultipleFeatures

**FEATURES AND TESTCASES**

Features: Select

Stage: stage1

Group: group1

- ☒ Bulwark\_Support\_SM\_Create\_Delete\_UpdateNotify\_PDSNotification\_RedCap\_verify
- ☐ internal\_SM\_Multi\_ServerHeader\_with\_Retry\_using\_SCP

Stage: stage2

Group: group3

- ☐ Pending\_Transaction\_N7\_Fast\_Lock\_Bulwark

Stage: stage3

Group: group3

- ☐ internal\_max\_rx\_session

TestCases: All

Total Test Cases are: 1

Stage: stage1 Group: group1

- Bulwark\_Support\_SM\_Create\_Delete\_UpdateNotify\_PDSNotification\_RedCap\_verify
- Bulwark\_CHF\_UDR\_notification\_RedCap\_verify

**Build** **Cancel**



# 3

## Installing ATS for Different Network Functions

This section describes how to install ATS for different network functions. It includes:

- [Installing ATS for BSF](#)
- [Installing ATS for NEF](#)
- [Installing ATS for NRF](#)
- [Installing ATS for NSSF](#)
- [Installing ATS for Policy](#)
- [Installing ATS for SCP](#)
- [Installing ATS for SEPP](#)
- [Installing ATS for UDR](#)

### 3.1 Installing ATS for BSF

The BSF ATS installation procedure covers two steps:

1. Locating and downloading the ATS package for BSF.
2. Deploying ATS and stub pods in Kubernetes cluster

This includes installation of three stubs (nf1stub, nf11stub, and nf12stub), ocdns-bind stub, and BSF ATS in BSF namespace.

#### 3.1.1 Resource Requirements

This section describes the ATS resource requirements for Binding Support Function.

##### Overview - Total Number of Resources

The following table describes the overall resource usage in terms of CPUs, memory, and storage:

**Table 3-1 BSF - Total Number of Resources**

| Resource Name       | Non-ASM CPU | Non-ASM Memory (GB) | ASM CPU | ASM Memory (GB) |
|---------------------|-------------|---------------------|---------|-----------------|
| BSF Total           | 41          | 36                  | 73      | 52              |
| ATS Total           | 11          | 11                  | 23      | 17              |
| cnDBTier Total      | 107.1       | 175.2               | 137.1   | 190.2           |
| Grand Total BSF ATS | 159.1       | 222.2               | 233.1   | 259.2           |

##### BSF Pods Resource Requirements Details

This section describes the resource requirements, which are needed to deploy BSF ATS successfully.

**Table 3-2 BSF Pods Resource Requirements Details**

| BSF Microservices      | Max CPU | Memory (GB) | Max Replica | Isito ASM CPU | Isito ASM Memory (GB) | Non-ASM Total CPU | Non-ASM Memory (GB) | ASM Total CPU | ASM Total Memory (GB) |
|------------------------|---------|-------------|-------------|---------------|-----------------------|-------------------|---------------------|---------------|-----------------------|
| oc-app-info            | 1       | 1           | 1           | 2             | 1                     | 1                 | 1                   | 3             | 2                     |
| oc-diam-gateway        | 4       | 2           | 1           | 2             | 1                     | 4                 | 2                   | 6             | 3                     |
| alternate-route        | 2       | 4           | 1           | 2             | 1                     | 2                 | 4                   | 4             | 5                     |
| oc-config-server       | 4       | 2           | 1           | 2             | 1                     | 4                 | 2                   | 6             | 3                     |
| ocgresss_gateway       | 4       | 6           | 1           | 2             | 1                     | 4                 | 6                   | 6             | 7                     |
| ocingress_gateway      | 4       | 6           | 1           | 2             | 1                     | 4                 | 6                   | 6             | 7                     |
| nrf-client-mngt        | 1       | 1           | 2           | 2             | 1                     | 2                 | 2                   | 6             | 4                     |
| oc-audit               | 2       | 1           | 1           | 2             | 1                     | 2                 | 1                   | 4             | 2                     |
| oc-config-mgmt         | 4       | 2           | 2           | 2             | 1                     | 8                 | 4                   | 12            | 6                     |
| oc-query               | 2       | 1           | 2           | 2             | 1                     | 4                 | 2                   | 8             | 4                     |
| oc-perf-info           | 1       | 1           | 2           | 2             | 1                     | 2                 | 2                   | 6             | 4                     |
| bsf-management-service | 4       | 4           | 1           | 2             | 1                     | 4                 | 4                   | 6             | 5                     |
| BSF Totals             |         |             |             |               |                       | 41                | 36                  | 73            | 52                    |

**ATS Resource Requirements details for BSF**

This section describes the ATS resource requirements, which are needed to deploy BSF ATS successfully.

**Table 3-3 ATS Resource Requirements Details**

| ATS Microservices | Max CPU | Max Memory (GB) | Max Replica | Isito ASM CPU | Isito ASM Memory (GB) | Non-ASM Total CPU | Non-ASM Total Memory (GB) | ASM Total CPU | ASM Total Memory (GB) |
|-------------------|---------|-----------------|-------------|---------------|-----------------------|-------------------|---------------------------|---------------|-----------------------|
| ocstub1-py        | 2       | 2               | 1           | 2             | 1                     | 2                 | 2                         | 4             | 3                     |
| ocstub2-py        | 2       | 2               | 1           | 2             | 1                     | 2                 | 2                         | 4             | 3                     |

**Table 3-3 (Cont.) ATS Resource Requirements Details**

| ATS Microservices | Max CPU | Max Memory (GB) | Max Replica | Isito ASM CPU | Isito ASM Memory (GB) | Non-ASM Total CPU | Non-ASM Total Memory (GB) | ASM Total CPU | ASM Total Memory (GB) |
|-------------------|---------|-----------------|-------------|---------------|-----------------------|-------------------|---------------------------|---------------|-----------------------|
| ocstub3-py        | 2       | 2               | 1           | 2             | 1                     | 2                 | 2                         | 4             | 3                     |
| ocats-bsf         | 3       | 3               | 1           | 2             | 1                     | 3                 | 3                         | 5             | 4                     |
| ocdns-bind        | 1       | 1               | 1           | 2             | 1                     | 1                 | 1                         | 3             | 2                     |
| ocdiam-sim        | 1       | 1               | 1           | 2             | 1                     | 1                 | 1                         | 3             | 2                     |
| ATS Totals        |         |                 |             |               |                       | 11                | 11                        | 23            | 17                    |

**cnDBTier Resource Requirements Details for BSF ATS**

This section describes the cnDBTier resource requirements, which are needed to deploy BSF ATS successfully.

**Note**

For cnDBTier pods, a minimum of 4 worker nodes are required.

**Table 3-4 cnDBTier Resource Requirements Details**

| cnDBTier Microservices | Min CPU | Min Memory (GB) | Min Replica | Isito ASM CPU | Isito ASM Memory (GB) | Total CPU | Total Memory (GB) | ASM Total CPU | ASM Total Memory (GB) |
|------------------------|---------|-----------------|-------------|---------------|-----------------------|-----------|-------------------|---------------|-----------------------|
| db_monitor_svc         | 1       | 1               | 1           | 2             | 1                     | 1         | 1                 | 3             | 2                     |
| db_replication_svc     | 2       | 12              | 1           | 2             | 1                     | 2         | 12                | 4             | 13                    |
| db_backup_manager_svc  | 0.1     | 0.2             | 1           | 2             | 1                     | 0.1       | 0.2               | 2.1           | 1.2                   |
| ndbappmysqld           | 8       | 10              | 4           | 2             | 1                     | 32        | 40                | 40            | 44                    |
| ndbmngmd               | 4       | 10              | 2           | 2             | 1                     | 8         | 20                | 12            | 22                    |
| ndbmtl                 | 10      | 18              | 4           | 2             | 1                     | 40        | 72                | 48            | 76                    |
| ndbmysqld              | 8       | 10              | 2           | 2             | 1                     | 16        | 20                | 20            | 22                    |
| db_infra_monitor_svc   | 8       | 10              | 1           | 2             | 1                     | 8         | 10                | 8             | 10                    |
| cnDBTier Total         |         |                 |             |               |                       | 107.1     | 175.2             | 137.1         | 190.2                 |

## 3.1.2 Downloading the ATS Package

This section provides information on how to locate and download BSF ATS package file from My Oracle Support (MOS).

### Locating and Downloading BSF ATS Package

To locate and download the ATS Image from MOS, perform the following steps:

1. Log in to [My Oracle Support](#) using the appropriate credentials.
2. Select the **Patches and Updates** tab.
3. In the **Patch Search** window, click **Product or Family (Advanced)**.
4. Enter *Oracle Communications Cloud Native Core - 5G* in the **Product** field.
5. Select *Oracle Communications Cloud Native Binding Support Function <release\_number>* from **Release** drop-down.
6. Click **Search**. The **Patch Advanced Search Results** list appears.
7. Select the required patch from the search results. The Patch Details window appears.
8. Click **Download**. The File Download window appears.
9. Click the **<p\*\*\*\*\*>\_<release\_number>\_Tekelec.zip** file to download the BSF ATS package file.
10. Untar the gzip file `ocats-bsf-tools-24.2.4.0.0.tgz` to access the following files:

```
ocats-bsf-pkg-24.2.4.0.0.tgz
ocdns-pkg-24.2.17.tgz
ocstub-pkg-24.2.6.tgz
ocdiam-sim-24.2.17.tgz
```

The contents included in each of these files are as follow:

```
ocats-bsf-tools-24.2.4.0.0.tgz
|
|_ _ _ _ _ ocats-bsf-pkg-24.2.4.tgz
| | _ _ _ _ _ ocats-bsf-24.2.4.tgz (Helm Charts)
| | _ _ _ _ _ ocats-bsf-images-24.2.4.tar (Docker Images)
| | _ _ _ _ _ ocats-bsf-data-24.2.4.tgz (BSF ATS and Jenkins job Data)
|
|_ _ _ _ _ ocstub-pkg-24.2.6.0.0.tgz
| | _ _ _ _ _ ocstub-py-24.2.6.tgz (Helm Charts)
| | _ _ _ _ _ ocstub-py-image-24.2.6.tar (Docker Images)
|
|_ _ _ _ _ ocdns-pkg-24.2.17.0.0.tgz
| | _ _ _ _ _ ocdns-bind-24.2.17.tgz (Helm Charts)
| | _ _ _ _ _ ocdns-bind-image-24.2.17.tar (Docker Images)
|
|_ _ _ _ _ ocdiam-pkg-24.2.17.0.0.tgz
| | _ _ _ _ _ ocdiam-sim-24.2.17.tgz (Helm Charts)
| | _ _ _ _ _ ocdiam-sim-image-24.2.17.tar (Docker Images)
```

11. Copy the tar file from the downloaded package to OCCNE, OCI, or Kubernetes cluster where you want to deploy ATS.

### 3.1.3 Deploy ATS with TLS Enabled

#### Note

- OCATS and Python stubs support both TLS 1.2. and TLS 1.3.
- DiamSim pod do not support secure calls.

Follow the steps in this section to create a Java KeyStore (JKS) file and enable the BSF ATS GUI with HTTPS during installation.

#### 3.1.3.1 Generate JKS File for Jenkins Server

To access Jenkins ATS GUI access through HTTPS, a JKS file should be created.

Perform the following steps to generate the JKS file:

##### Generate the Root Certificate

1. If the user has a Certificate Authority (CA) signed root certificate such as `caroot.cert` and key, then the user can use those files.
2. If the root certificate is not already available, the user can generate one self signed root certificate. This root certificate created needs to be added to the truststore such as a Browser like Firefox or Chrome. User can follow the Browser specific documentation to upload the root certificate. The root certificate is used to sign the application, or ATS certificate.
3. Generate a root key with the following command:

```
openssl genrsa 2048 > caroot.key
```

This will generate a key called `caroot.key`

4. Generate a `caroot` certificate with the following command:

```
openssl req -new -x509 -nodes -days 1000 -key <root_key> >  
<root_certificate>
```

For example,

```
[cloud-user@platform-bastion-1]$ openssl req -new -x509 -nodes -days 1000 -  
key caroot.key > caroot.cer  
You are about to be asked to enter information that will be incorporated  
into your certificate request.  
What you are about to enter is what is called a Distinguished Name or a DN.  
There are quite a few fields but you can leave some blank  
For some fields there will be a default value,  
If you enter '.', the field will be left blank.  
-----  
Country Name (2 letter code) [XX]:IN
```

```
State or Province Name (full name) []:KA
Locality Name (eg, city) [Default City]:BLR
Organization Name (eg, company) [Default Company Ltd]:ORACLE
Organizational Unit Name (eg, section) []:CGBU
Common Name (eg, your name or your server's hostname) []:ocats
Email Address []:
[cloud-user@platform-bastion-1]$
```

### Generate Application or Client Certificate

1. Create a `ssl.conf` file.
2. Edit the `ssl.conf` file. In the "[alt\_names]" section, list the IPs that are used to access ATS GUI as shown in the following sample `ssl.conf` file:

```
[ req ]
default_bits          = 4096
distinguished_name    = req_distinguished_name
req_extensions        = req_ext

[ req_distinguished_name ]
countryName           = Country Name (2 letter code)
countryName_default   = IN
stateOrProvinceName   = State or Province Name (full name)
stateOrProvinceName_default = KN
localityName          = Locality Name (eg, city)
localityName_default  = BLR
organizationName      = Organization Name (eg, company)
organizationName_default = ORACLE
commonName            = Common Name (e.g. server FQDN or YOUR name)
commonName_max        = 64
commonName_default    = ocats.ocbsf.svc.cluster.local

[ req_ext ]
keyUsage = critical, digitalSignature, keyEncipherment
extendedKeyUsage = serverAuth, clientAuth
basicConstraints = critical, CA:FALSE
subjectAltName = critical, @alt_names

[alt_names]
IP.1 = 127.0.0.1
IP.2 = 10.75.217.5
IP.3 = 10.75.217.76
DNS.1 = localhost
DNS.2 = ocats.ocbsf.svc.cluster.local
```

**Note**

- To access the GUI with DNS, make sure that the commonName\_default is the same as the DNS name being used.
  - Ensure the DNS is in this format:<service\_name>.<namespace>.svc.cluster.local

Multiple DNSs, such as DNS.1, DNS.2, and so on, can be added.
- To support the ATS API, it is necessary to add the IP 127.0.0.1 to the list of IPs.

**3. Create a Certificate Signing Request (CSR) with the following command:**

```
openssl req -config ssl.conf -newkey rsa:2048 -days 1000 -nodes -keyout
rsa_private_key_pkcs1.key > ssl_rsa_certificate.csr
```

Output:

```
[cloud-user@platform-bastion-1 ocbsf]$ openssl req -config ssl.conf -
newkey rsa:2048 -days 1000 -nodes -keyout rsa_private_key_pkcs1.key >
ssl_rsa_certificate.csr
Ignoring -days; not generating a certificate
Generating a RSA private key
...+++++
.....+++++
writing new private key to 'rsa_private_key_pkcs1.key'
-----
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [IN]:
State or Province Name (full name) [KA]:
Locality Name (eg, city) [BLR]:
Organization Name (eg, company) [ORACLE]:
Common Name (e.g. server FQDN or YOUR name) [ocbsf]:
[cloud-user@platform-bastion-1 ocbsf]$
```

**4. To display all the components of the CSR file and to verify the configurations run the following command:**

```
openssl req -text -noout -verify -in ssl_rsa_certificate.csr
```

**5. Sign the CSR file with root certificate by running the following command:**

```
openssl x509 -extfile ssl.conf -extensions req_ext -req -
inssl_rsa_certificate.csr -days 1000 -CA ../caroot.cer -CAkey ../
caroot.key -set_serial 04 > ssl_rsa_certificate.crt
```

Output:

```
[cloud-user@platform-bastion-1 ocbsf]$ openssl x509 -extfile ssl.conf -  
extensions req_ext -req -in ssl_rsa_certificate.csr -days 1000 -CA ../  
caroot.cer -CAkey ../caroot.key -set_serial 04 > ssl_rsa_certificate.crt  
Signature ok  
subject=C = IN, ST = KA, L = BLR, O = ORACLE, CN = ocbsf  
Getting CA Private Key  
[cloud-user@platform-bastion-1 ocbsf]$
```

6. Verify if the certificate is signed by the root certificate by running the following command:

```
[cloud-user@platform-bastion-1 ocbsf]$ openssl verify -CAfile caroot.cer  
ssl_rsa_certificate.crt
```

Output:

```
[cloud-user@platform-bastion-1 ocbsf]$ openssl verify -CAfile caroot.cer  
ssl_rsa_certificate.crt  
ssl_rsa_certificate.crt: OK
```

7. Save the generated application certificate and root certificate.
8. Add the caroot.cer to the browser as a trusted author.
9. The generated application/client certificates cannot be directly given to the Jenkins server. Hence generate the .p12 keystore file for the client certificate with the following command:

```
[cloud-user@platform-bastion-1 ocbsf]$ openssl pkcs12 -inkey  
rsa_private_key_pkcs1.key -inssl_rsa_certificate.crt -export-out  
certificate.p12  
Enter Export Password:  
Verifying - Enter Export Password:
```

10. In the prompt, create a password and save it for future use.
11. Convert the .p12 keystore file into a JKS format file using the following command:

```
[cloud-user@platform-bastion-1 ocbsf]$ keytool -importkeystore -  
srckeystore ./certificate.p12 -srcstoretype pkcs12 -destkeystore  
jenkinsserver.jks -deststoretype JKS
```

Output:

```
[cloud-user@platform-bastion-1 ocbsf]$ keytool -importkeystore -  
srckeystore ./certificate.p12 -srcstoretype pkcs12 -destkeystore  
jenkinsserver.jks -deststoretype JKS  
Importing keystore ./certificate.p12 to jenkinsserver.jks...  
Enter destination keystore password:
```



```

Re-enter new password:
Enter source keystore password:
Entry for alias 1 successfully imported.
Import command completed: 1 entries successfully imported, 0 entries
failed or cancelled

```

12. In the prompt, use the same password used while creating .p12 keystore file.

#### Note

Ensure that the .p12 keystore and JKS files has the same passwords.

13. The generated JKS file, jenkinserver.jks is added to the Jenkins path, where Jenkins server can access it.

For more details about the ATS TLS feature, refer to [Deploy ATS with TLS Enabled](#) section.

### 3.1.3.2 Enable TLS on Python Stubs

Before starting the creation of certificate, user should have the path details of caroot.cer file.

1. Create a ssl.conf file.
2. Edit ssl.conf file. Ensure that the DNS is in the format of \*.<namespace>.svc  
A Sample **stub\_ssl.conf** file:

```

[ req ]
default_bits          = 4096
distinguished_name    = req_distinguished_name
req_extensions        = req_ext

[ req_distinguished_name ]
countryName            = Country Name (2 letter code)
countryName_default    = IN
stateOrProvinceName    = State or Province Name (full name)
stateOrProvinceName_default = KN
localityName           = Locality Name (eg, city)
localityName_default   = BLR
organizationName       = Organization Name (eg, company)
organizationName_default = ORACLE
commonName             = svc.cluster.local

[ req_ext ]
keyUsage = critical, digitalSignature, keyEncipherment
extendedKeyUsage = serverAuth, clientAuth
basicConstraints = critical, CA:FALSE
subjectAltName = critical, @alt_names

[alt_names]
IP.1 = 127.0.0.1
DNS.1 = *.ocats.svc

```

3. Create a Certificate Signing Request (CSR) for the stubs using the following command:

```
openssl req -config stub_ssl.conf -newkey rsa:2048 -days 1000 -nodes -
keyout rsa_private_key_stub_pkcs2.key > stub_ssl_rsa_certificate1.csr
```

Output:

```
[cloud-user@platform-bastion-1 stub_certs]$ openssl req -config
stub_ssl.conf -newkey rsa:2048 -days 1000 -nodes -keyout
rsa_private_key_stub_pkcs2.key > stub_ssl_rsa_certificate1.csr
Ignoring -days; not generating a certificate
Generating a RSA private key
.....+++++
...+++++
writing new private key to 'rsa_private_key_stub_pkcs2.key'
-----
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [IN]:
State or Province Name (full name) [KN]:
Locality Name (eg, city) [BLR]:
Organization Name (eg, company) [ORACLE]:
svc.cluster.local []:*.ocbsf.svc
```

4. Sign the certificate with the CA root using the following command:

```
openssl x509 -extfile stub_ssl.conf -extensions req_ext -req -in
stub_ssl_rsa_certificate1.csr -days 1000 -CA ../ocbsf-caroot.cer -
CAkey ../ocbsf-caroot.key -set_serial 05 > stub_ssl_rsa_certificate1.crt
```

Output:

```
[cloud-user@platform-bastion-1 stub_certs]$ openssl x509 -extfile
stub_ssl.conf -extensions req_ext -req -in stub_ssl_rsa_certificate1.csr -
days 1000 -CA ../ocbsf-caroot.cer -CAkey ../ocbsf-caroot.key -set_serial
05 > stub_ssl_rsa_certificate1.crt
Signature ok
subject=C = IN, ST = KN, L = BLR, O = ORACLE, CN = *.ocbsf.svc
Getting CA Private Key
```

5. Create a secret for the stub and associate it with the namespace using the following command:

```
kubectl create secret generic ocats-stub-secret1 --from-
file=stub_ssl_rsa_certificate1.crt --from-
file=rsa_private_key_stub_pkcs2.key --from-file=../ocbsf-caroot.cer -n
ocbsf
```

Output:

```
[cloud-user@platform-bastion-1 ocbsf]$ kubectl create secret generic ocbsf-
stub-secret1 --from-file=stub_ssl_rsa_certificate1.crt --from-
file=rsa_private_key_stub_pkcs2.key --from-file=./ocbsf-caroot.cer -n
ocbsf
secret/ocats-stub-secret1 created
```

6. Update values.yaml file of each Python stub in specific NF namespace with following details:

```
NF: "<NF-Name>"
cert_secret_name: "ocats-stub-secret"
ca_cert: "ocbsf-caroot.cer"
client_cert: "ocbsf-stub_ssl_rsa_certificate.crt"
private_key: "ocbsf-rsa_private_key_stub_pkcs1.key"
expose_tls_service: true
CLIENT_CERT_REQ: true
```

#### Note

If the Helm, cert\_secret\_name parameter, is null, then ca\_cert, client\_cert, and private\_key values are not considered by the TLS.

7. Ensure to update the deployment of all the Python stubs installed on the setup.

For more details about the ATS TLS feature, refer to [Support for Transport Layer Security](#) section.

### 3.1.3.3 Enable ATS GUI with HTTPS

Follow the steps to secure or enable TLS on the server.

1. Create a Kubernetes secret by adding the above created files:

```
kubectl create secret generic ocats-tls-secret --from-
file=jenkinsserver.jks --from-file=ssl_rsa_certificate.crt --from-
file=rsa_private_key_pkcs1.key --from-file=caroot.cer -n ocbsf
```

Where,

**jenkinsserver.jks:** This file is needed when atsGuiTLSEnabled is set to true. This is necessary to open ATS GUI with secured TLS protocol.

**ssl\_rsa\_certificate.crt:** This is client application certificate.

**rsa\_private\_key\_pkcs1.key:** This is RSA private key.

**caroot.cer:** This file used during creation of jks file needs to be passed for Jenkins/ATS API communication.

The sample of created secret:

```
[cloud-user@platform-bastion-1 ~]$ kubectl describe secret ocats-tls-secret -n ocbsf
Name:          ocats-tls-secret
Namespace:     ocats
Labels:        <none>
Annotations:   <none>

Type: Opaque

Data
====
caroot.cer:          1147 bytes
ssl_rsa_certificate.crt: 1424 bytes
jenkinsserver.jks:   2357 bytes
rsa_private_key_pkcs1.key: 1675 bytes
```

2. Apply the following changes in values.yaml file.

```
certificates:
  cert_secret_name: "ocats-tls-secret"
  ca_cert: "caroot.cer"
  client_cert: "ssl_rsa_certificate.crt"
  private_key: "rsa_private_key_pkcs1.pem"
  jks_file: "jenkinsserver.jks" # This parameter is needed when
atsGuiTLSEnabled
  is set to true. This file is necessary for ATS GUI to be opened with
  secured TLS protocol.
  jks_password: "123456" #This is the password given to the jks file
  while creation.
```

The user can install the ATS, using the helm install command. Change the `atsGuiTLSEnabled` Helm parameter value to true for ATS to get the certificates and support HTTPS for GUI.

3. Upload the `caroot.cer` file to the browser, before accessing it using https protocol. For more details about the uploading the file to the browser, refer to *Adding a Certificate in Browser* section in [Enable ATS GUI with HTTPS](#).
4. A user can now start ATS with HTTPS the protocol. The link to open the ATS GUI format is `https://<IP>:<port>`, for example, `https://10.75.217.25:30301`. The lock symbol in the browser indicates that the server is secured or TLS enabled.

### 3.1.4 Pushing the Images to Customer Docker Registry

This section describes the pre-deployment steps for deploying ATS and stub pods.

#### Preparing to deploy ATS and Stub Pods in Kubernetes Cluster

To deploy ATS and Stub pods in a Kubernetes Cluster, perform the following steps:

1. Run the following command to extract the tar file content:
 

```
tar -zxvf ocats-bsf-tools-24.2.4.0.0.tgz
```

The output of this command is:

```
ocats-bsf-pkg-24.2.4.tgz
ocstub-pkg-24.2.6.tgz
ocdns-pkg-24.2.17.tgz
ocdiam-pkg-24.2.17.0.0.tgz
```

2. Go to the ocats-bsf-tools-24.2.4.0.0 folder and run the following command to extract the helm charts and docker images of ATS:  
tar -zxvf ocats-bsf-pkg-24.2.4.0.0.tgz

The output of this command is:

```
ocats-bsf-24.2.4.tgz
ocats-bsf-images-24.2.4.tar
ocats-bsf-data-24.2.4.tgz
```

3. Run the following command in your cluster to load the ATS docker image:  
docker load --input ocats-bsf-images-24.2.4.tar
4. Run the following commands to tag and push the ATS images

```
docker tag ocats-bsf:24.2.4 <registry>/ocats-bsf:24.2.4
docker push <registry>/ocats-bsf:24.2.4
```

#### Example:

```
docker tag ocats-bsf:24.2.4 localhost:5000/ocats-bsf:24.2.4
docker push localhost:5000/ocats-bsf:24.2.4
```

5. Run the following command to untar the helm charts, in ocats-bsf-24.2.4.tgz  
  
tar -zxvf ocats-bsf-24.2.4.tgz
6. Update the registry name, image name and tag in the ocats-bsf/values.yaml file as required. For this, you need to update the image.repository and image.tag parameters in the ocats-bsf/values.yaml file.
7. In the ocats-bsf/values.yaml file, the atsFeatures parameter is configured to control ATS feature deliveries.

```
atsFeatures: ## DO NOT UPDATE this section without My Oracle Support
team's support
  testCaseMapping: true           # To display Test cases on GUI along
with Features
  logging: true                   # To enable feature to collect
applogs in case of failure
  lightWeightPerformance: false   # The Feature is not implemented yet
  executionWithTagging: true      # To enable Feature/Scenario
execution with Tag
  scenarioSelection: false        # The Feature is not implemented yet
  parallelTestCaseExecution: true  # To run ATS features parallel
  parallelFrameworkChangesIntegrated: true # To run ATS features parallel
```

```
mergedExecution: false           # To execute ATS Regression and
NewFeatures pipelines together in merged manner
individualStageGroupSelection: false # The Feature is not implemented
yet
parameterization: true           # When set to false, the
Configuration_Type parameter on the GUI will not be available.
atsApi: true                     # To trigger ATS using ATS API
healthcheck: true                # TO enable/disable ATS Health Check.
atsGuiTLSEnabled: false          # To run ATS GUI in https mode.
atsCommunicationTLSEnabled: false #If set to true, ATS will get
necessary variables to communicate with SUT, Stub or other NFs with TLS
enabled. It is not required in ASM environment.
```

#### Note

It is recommended to avoid altering atsFeatures flags.

## 3.1.5 Configuring ATS

### 3.1.5.1 Enabling Static Port

To enable static port, in the `ocats-bsf/values.yaml` file under the `service` section, set the value of `staticNodePortEnabled` parameter to `true` and enter a valid `nodePort` value for `staticNodePort` parameter.

```
service:
  customExtension:
    labels: {}
    annotations: {}
  type: LoadBalancer
  ports:
    http:
      port: "8080"
      staticNodePortEnabled: false
      staticNodePort: ""
```

### 3.1.5.2 Enable Static API Node Port

To enable static API node port, in the `ocats-bsf/values.yaml` file under the **service** section, set the value of **staticNodePortEnabled** parameter to `true` and enter a valid `nodePort` value for **staticNodePort** parameter. The following is a snippet of the service section in the `yaml` file:

```
service:
  customExtension:
    labels: {}
    annotations: {}
  type: LoadBalancer
  ports:
    api:
      port: "5001"
```

```
staticNodePortEnabled: false
staticNodePort: ""
```

### 3.1.5.3 Service Account Requirements

To run BSF-ATS, use the following rules to create a service account:

```
rules:
- apiGroups: ["extensions"]
  resources: ["deployments", "replicasets"]
  verbs: ["watch", "get", "list", "update"]
- apiGroups: ["apps"]
  resources: ["deployments", "replicasets"]
  verbs: ["watch", "get", "list", "update"]
- apiGroups: [""]
  resources: ["pods", "services", "secrets", "configmaps"]
  verbs: ["watch", "get", "list", "delete", "update", "create"]
- apiGroups: [""]
  resources: ["pods/log"]
  verbs: ["get", "list"]
```

### 3.1.5.4 Enabling Aspen Service Mesh

This section provides information on how to enable Aspen service mesh while deploying ATS for Binding Support Function. The configurations mentioned in this section are optional and should be performed only if ASM is required.

To enable service mesh for BSF ATS, perform the following steps:

1. In the **service** section of the `values.yaml` file, the **serviceMeshCheck** parameter is set to `false` by default. To enable service mesh, set the value for **serviceMeshCheck** to `true`. The following is a snippet of the service section in the `yaml` file:

```
service:
  customExtension:
    labels: {}
    annotations: {}
  type: LoadBalancer
  ports:
    https:
      port: "8443"
      staticNodePortEnabled: false
      staticNodePort: ""
    http:
      port: "8080"
      staticNodePortEnabled: false
      staticNodePort: ""
    api:
      port: "5001"
      staticNodePortEnabled: false
      staticNodePort: ""
  serviceMeshCheck: true
```

2. If the ASM is not enabled on the global level for the namespace, run the following command to enable it before deploying the ATS:

```
kubectl label --overwrite namespace <namespace_name> istio-
injection=enabled
```

For example:

```
kubectl label --overwrite namespace ocbsf istio-injection=enabled
```

3. Uncomment and add the following annotation under the **lbDeployments** and **nonlbDeployments** section of the global section in `values.yaml` file as follows:

```
traffic.sidecar.istio.io/excludeInboundPorts: "9000"
traffic.sidecar.istio.io/excludeOutboundPorts: "9000"
```

The following is a snippet from the `values.yaml` of BSF:

```
/home/cloud-user/ocats-bsf/ocats-bsf-tools-24.2.4.0.0/ocats-bsf-
pkg-24.2.4.0.0/ocats-bsf/
vim values.yaml
```

```
customExtension:
  allResources:
    labels: {}
    annotations: {
      #Enable this section for service-mesh based installation
      traffic.sidecar.istio.io/excludeInboundPorts: "9000",
      traffic.sidecar.istio.io/excludeOutboundPorts: "9000"
    }
```

```
lbDeployments:
  labels: {}
  annotations: {
    traffic.sidecar.istio.io/excludeInboundPorts: "9000",
    traffic.sidecar.istio.io/excludeOutboundPorts: "9000"}
}
```

4. If service mesh is enabled, then create a destination rule for fetching the metrics from the Prometheus. In most of the deployments, Prometheus is kept outside the service mesh so you need a destination rule to communicate between TLS enabled entity (ATS) and non-TLS entity (Prometheus). You can create a destination rule using the following sample `yaml` file:

```
kubectl apply -f - <<EOF

apiVersion: networking.istio.io/v1alpha3
kind: DestinationRule
metadata:
  name: prometheus-dr
  namespace: ocats
spec:
  host: oso-prometheus-server.pcf.svc.cluster.local
  trafficPolicy:
    tls:
```



```
mode: DISABLE
EOF
```

In the destination rule:

- **name** indicates the name of destination rule.
  - **namespace** indicates where the ATS is deployed.
  - **host** indicates the hostname of the prometheus server.
5. Update the `ocbsf_custom_values_servicemesh_config_24.2.4.yaml` with the below additional configuration under `virtualService` section for Egress Gateway:

```
virtualService:
- name: nrfvirtual1
  host: ocbsf-ocbsf-egress-gateway
  destinationhost: ocbsf-ocbsf-egress-gateway
  port: 8000
  exportTo: |-
    [ "." ]
  attempts: "0"
```

Where,

host or destination name uses the format - `<release_name>-<egress_svc_name>`.

You must update the host or destination name as per the deployment.

6. Perform helm upgrade on the `ocbsf-servicemesh-config` release using the modified `ocbsf_custom_values_servicemesh_config_24.2.4.yaml` file.

```
helm upgrade <helm_release_name_for_servicemesh> -n <namespace>
<servicemesh_charts> -f <servicemesh-custom.yaml>
```

For example,

```
helm upgrade ocbsf-servicemesh-config ocbsf-servicemesh-config-24.2.4.tgz -
n ocbsf -f ocbsf_custom_values_servicemesh_24.2.4.yaml
```

7. Configure DNS for Alternate Route service. For more information, see [Post-Installation Steps](#).

### 3.1.5.5 Enabling Health Check

This section describes how to enable Health Check for ATS.

To enable Health Check, in the `ocats-bsf/values.yaml` file, set the value of `healthcheck` parameter to `true` and enter a valid value to select either **Webscale** or **OCCNE** environment.

To select OCCNE environment, set the `envtype` to **OCCNE** and update the values of the following parameters:

- `webscale` - Update the value as `false`
- `envtype` - `T0NDTkU=` (i.e `envtype=$(echo -n 'OCCNE' | base64)`)
- `occnehostip` - OCCNE Host IP address

- occnehostusername - OCCNE Host Username
- occnehostpassword - OCCNE Host Password

To select OCCNE environment, update the values of the following two parameters:

- webscale - Update the value as true
- envtype - T0NDTKU= (i.e envtype=\$(echo -n 'OCCNE' | base64))

After the configurations are done, encrypt the parameters and provide the values as shown in the following snippet:

```
atsFeatures: ## DO NOT UPDATE this section without Engineering team's
permission
  healthcheck: true                # TO enable/disable ATS Health Check.

webscale: false
healthchecksecretname: "healthchecksecret"
occnehostip: "MTAuMTcuMjE5LjY1"
occnehostusername: "dXNlcm5hbWU="
occnehostpassword: "KioqKg=="
envtype: "T0NDTKU="
```

To select WEBSCALE environment, update the values of the following two parameters:

- webscale - Update the value as true
- envtype - V0VCU0NBTEU= (i.e envtype=\$(echo -n '**WEBSCALE**' | base64))

After the configurations are done, encrypt the parameters and provide the values as shown in the following snippet:

```
atsFeatures: ## DO NOT UPDATE this section without Engineering team's
permission
  healthcheck: true                # TO enable/disable ATS Health Check.

webscale: true
healthchecksecretname: "healthchecksecret"
occnehostip: ""
occnehostusername: ""
occnehostpassword: ""
envtype: "V0VCU0NBTEU="
webscalejumpip: "MTAuNzAuMTE3LjQy"
webscalejumpusername: "dXNlcm5hbWU="
webscalejumppassword: "KioqKg=="
webscaleprojectname: "KioqKg=="
webscalelabserverFQDN: "KioqKg=="
webscalelabserverport: "KioqKg=="
webscalelabserverusername: "KioqKg=="
webscalelabserverpassword: "KioqKg=="
```

**Note**

Once the ATS is deployed with HealthCheck feature enabled or disabled, then it cannot be changed. To change the configuration, you are required to re-install.

### 3.1.5.6 Enabling Persistent Volume

**Note**

The steps provided in this section are optional and required only if Persistent Volume needs be to enabled.

ATS supports Persistent storage to retain ATS historical build execution data, test cases and one-time environment variable configurations. With this enhancement, the user can decide whether to use persistent volume based on their resource requirements. By default, the persistent volume feature is not enabled.

To enable persistent storage, perform the following steps:

1. Create a PVC using PersistentVolumeClaim.yaml file and associate the same to the ATS pod.

Sample PersistentVolumeClaim.yaml file:

```
apiVersion: v1
kind: PersistentVolumeClaim
metadata:
  name: <Enter the PVC Name>
  annotations:
spec:
  storageClassName: <Provide the Storage Class Name>
  accessModes:
    - ReadWriteOnce
  resources:
    requests:
      storage: <Provide the size of the PV>
```

- a. Set **PersistentVolumeClaim** to the PVC file name.
- b. Enter the **storageClassName** to the Storage Class Name.
- c. Set **storage** to and size of the persistent volume.  
Sample PVC configuration:

```
apiVersion: v1
kind: PersistentVolumeClaim
metadata:
  name: bsf-pvc-24.2.4
  annotations:
spec:
  storageClassName: standard
  accessModes:
    - ReadWriteOnce
  resources:
```

```
requests:
  storage: 1Gi
```

2. Run the following command to create PVC:

```
kubectl apply -f <filename> -n <namespace>
```

For example:

```
kubectl apply -f PersistentVolumeClaim.yaml -n ocbsf
```

Output:

```
persistentvolumeclaim/bsf-pvc-24.2.4 created
```

3. Once the PVC is created, run the following command to verify that it is bound to the persistent volume and is available.

```
kubectl get pvc -n <namespace used for pvc creation>
```

For example:

```
kubectl get pvc -n ocbsf
```

Sample output:

| NAME           | CAPACITY | ACCESS MODES | STATUS | VOLUME                                   |
|----------------|----------|--------------|--------|------------------------------------------|
|                |          |              |        | STORAGECLASS AGE                         |
| bsf-pvc-24.2.4 | 1Gi      | Bound        |        | pvc-65484045-3805-4064-9fc3-f9eeeaccc8b8 |
|                |          | RWO          |        | standard 11s                             |

Verify that the STATUS is Bound and rest of the parameters like NAME, CAPACITY, ACCESS MODES, and STORAGECLASS are as mentioned in the PersistentVolumeClaim.yaml file.

#### Note

Do not proceed further with the next step if there is an issue with the PV creation and contact your administrator to get the PV Created.

4. Enable PVC:
  - a. Set the **PVEnabled** flag to **true**.
  - b. Set **PVClaimName** to the PVC created in Step 1.

```
deployment:
  customExtension:
    labels: {}
    annotations: {}
    PVEnabled: true
```

PVCclaimName: "ocbsf-pvc-24.2.4"

### Note

Make sure that ATS is deployed before proceeding to the further steps.

5. Copy the <nf\_main\_folder> and <jenkins jobs> folders from the tar file to their ATS pod and restart the pod.

- a. Extract the tar file.

```
tar -xvf ocats-bsf-data-24.2.4.tgz
```

- b. Run the following commands to copy the desired folder.

```
kubectl cp ocats-bsf-data-24.2.4/ocbsf_tests <namespace>/<pod-name>:/var/lib/jenkins/
```

```
kubectl cp ocats-bsf-data-24.2.4/jobs <namespace>/<pod-name>:/var/lib/jenkins/.jenkins/
```

- c. Restart the pod.

```
kubectl delete po <pod-name> -n <namespace>
```

6. Once the Pod is up and running, log in to the Jenkins console and configure the **Discard old Builds** option to configure the number of Jenkins builds, which must be retained in the persistent volume.

**Figure 3-1 Discarding Old Builds**

☒ Discard old builds

Strategy: Log Rotation

Days to keep builds:

if not empty, build records are only kept up to this number of days

Max # of builds to keep:

if not empty, only up to this number of build records are kept

Advanced...

### Note

If **Discard old Builds** is not configured, Persistent Volume can get filled when there are huge number of builds.

For more details on Persistent Volume Storage, see [Persistent Volume for 5G ATS](#).

### 3.1.5.7 ATS-BSF API Extended Support

The ATS application programming interface (API) feature provides APIs, to perform routine ATS tasks such as starting the ATS suite, monitoring and stopping the ATS suite etc.

By default, this feature is enabled in `values.yaml` file.

```
atsFeatures:  
  atsApi: true
```

For more details about the ATS API feature, refer to [ATS API](#) section.

This ATS feature is extended to provide the ability of running single features, or scenarios, or stages, or groups, or based on tags execution using the API. This also allows running of test cases by providing the features, or scenarios, or stages, or groups, or tags in the `curl` request to the server.

For more details about the API interfaces, refer to [Use the RESTful Interfaces](#) section.

## 3.1.6 Deploying ATS and Pods

### 3.1.6.1 Deploying ATS in Kubernetes Cluster

#### ! Important

This Procedure is for Backwards porting purpose only and should not be considered as the Subsequent Release POD Deployment Procedure.

**Prerequisite:** Make sure that the old PVC, which contains the old release POD data is available.

To deploy ATS, perform the following steps:

1. Run the following command to deploy ATS using the updated helm charts:

#### i Note

Ensure that all the the components, that is, ATS, stub pods and CNC BSF are deployed in the same namespace.

#### Using Helm

```
helm install -name <release_name> ocats-bsf-24.2.4.tgz --namespace  
<namespace_name> -f <values-yaml-file>
```

For example:

```
helm install -name ocats ocats-bsf-24.2.4.tgz --namespace ocbsf -f ocats-bsf/values.yaml
```

2. Run the following command to verify ATS deployment:

```
helm ls -n ocbsf
```

The output of the command is as follows:

| NAME     | REVISION         | UPDATED                  |           |
|----------|------------------|--------------------------|-----------|
| STATUS   | CHART            | APP VERSION              | NAMESPACE |
| ocats    | 1                | Mon Nov 14 14:56:11 2020 |           |
| DEPLOYED | ocats-bsf-24.2.4 | 1.0                      | ocbsf     |

If the deployment is successful, the status is **Deployed**.

### 3.1.6.2 Deploying Stub Pod in Kubernetes Cluster

To deploy Stub Pod in Kubernetes cluster, perform the following steps:

1. Navigate to ocats-bsf-tools-24.2.4.0.0 folder and run the following command:

```
tar -zxvf ocstub-pkg-24.2.6.0.0.tgz
```

The output of the command shows:

- ocstub-py-24.2.6.tgz
  - ocstub-py-image-24.2.6.tar
2. Deploy the additional stubs required to validate the session retry feature. You can use nf11stub or nf12stub as alternate FQDN for nf1stub.

- a. Run the following command to load the stub image.

```
docker load --input ocstub-py-image-24.2.6.tar
```

- b. Tag and push the image to your docker registry using below commands.

```
docker tag ocats-bsf:24.2.4 localhost:5000/ocats-bsf:23.4.0
docker push localhost:5000/ocats-bsf:24.2.4
```

- c. Untar the helm charts ocstub-py-24.2.6.tgz and update the registry name, image name and tag (if required) in ocstub-py/values.yaml file.

**Note**

From 24.2.0 onwards, service port names are configurable in ocstub-py. But as per Istio standard, it's advisable to keep the default values as it as.  
Example:

```
names:
  http: "http"
  h2c: "http2-h2c"
  h2: "http2-h2"
```

- d. If required, change apiVersion to apps/v1 in ocstub-py/templates/deployment.yaml file.

```
apiVersion: apps/v1
```

- e. Deploy the stub:

```
helm install -name <release_name> ocstub-py --set env.NF=<NF> --setenv.LOG_LEVEL=<DEBUG/INFO> --set service.name=<service_name> --set service.appendReleaseName=false --namespace=<namespace_name> -f <valuesyaml-file>
```

For example:

```
helm install -name nf1stub ocstub-py --set env.NF=BSF --set env.LOG_LEVEL=DEBUG --set service.name=nf1stub --set service.appendReleaseName=false --namespace=ocbsf -f ocstub-py/values.yaml
```

```
helm install -name nf11stub ocstub-py --set env.NF=BSF --set env.LOG_LEVEL=DEBUG --set service.name=nf11stub --set service.appendReleaseName=false --namespace=ocbsf -f ocstub-py/values.yaml
```

```
helm install -name nf12stub ocstub-py --set env.NF=BSF --set env.LOG_LEVEL=DEBUG --set service.name=nf12stub --set service.appendReleaseName=false --namespace=ocbsf -f ocstub-py/values.yaml
```

- f. Run the following command to verify the stub deployment:

```
helm ls -n ocbsf
```

Sample output:

```
[cloud-user@platform-bastion-1 ocstub-pkg-24.2.6.0.0]$ helm ls -n ocbsf
NAME                REVISION    UPDATED
STATUS             CHART        APP VERSION    NAMESPACE
nf11stub            1            Thu Jul 29 05:55:48 2021
```



```

DEPLOYED      ocstub-py-24.2.6      1.0      ocbsf
nf12stub      1      Thu Jul 29 05:55:50 2021
DEPLOYED      ocstub-py-24.2.6      1.0      ocbsf
nf1stub       1      Thu Jul 29 05:55:47 2021
DEPLOYED      ocstub-py-24.2.6      1.0      ocbsf

```

- g. Run the following command to verify the ATS and Stubs deployment status:

```
helm status -n ocbsf
```

- h. Run the following command to verify if all the services are installed.

```
kubectl get po -n ocbsf
```

Sample output:

```

[cloud-user@platform-bastion-1 ocstub-pkg-24.2.6.0.0]$ kubectl get po -
n ocbsf
NAME                                READY   STATUS
RESTARTS   AGE
nf11stub-ocstub-py-7bffd6dcd7-ftm5f 1/1     Running
0      3d23h
nf12stub-ocstub-py-547f7cb99f-7mpll 1/1     Running
0      3d23h
nf1stub-ocstub-py-bdd97cb9-xjrkx    1/1     Running
0      3d23h

```

### 3.1.6.3 Deploying DNS Stub in Kubernetes Cluster

#### Note

Ensure there are sufficient resources and limit for DNS Stub. Set the resource request and limit values in the **resources** section of the **values.yaml** file as follows:

```

resources: {}
# We usually recommend not to specify default resources and to leave
this as a conscious
# choice for the user. This also increases chances charts run on
environments with little
# resources, such as Minikube. If you do want to specify resources,
uncomment the following
# lines, adjust them as necessary, and remove the curly braces after
'resources:'. # limits:
#   cpu: 1000m
#   memory: 1024Mi
# requests:
#   cpu: 500m
#   memory: 500Mi

```

To deploy DNS Stub in Kubernetes cluster, perform the following steps:

1. Go to the `ocats-bsf-tools-24.2.4.0.0` folder and run the following command to extract the `ocstub` tar file content:

```
tar -zxvf ocdns-pkg-24.2.17.0.0.tgz
```

Sample output:

```
[cloud-user@platform-bastion-1 ocdns-pkg-24.2.17.0.0]$ ls -ltrh
total 211M
-rw----- . 1 cloud-user cloud-user 211M Mar 14 14:49 ocdns-bind-
image-24.2.17.tar
-rw-r--r-- . 1 cloud-user cloud-user 2.9K Mar 14 14:49 ocdns-
bind-24.2.17.tgz
```

2. Run the following command in your cluster to load the DNS STUB image:  
`docker load --input ocdns-bind-image-24.2.17.tar`
3. Run the following commands to tag and push the DNS STUB image:

```
docker tag ocdns-bind:24.2.17 localhost:5000/ocdns-bind:24.2.17
docker push localhost:5000/ocdns-bind:24.2.17
```

4. Run the following command to untar the helm charts, `ocdns-bind-24.2.17.tgz`.  
`tar -zxvf ocdns-bind-24.2.17.tgz`
5. Update the registry name, image name and tag (if required) in the `ocdns-bind/values.yaml` file as required. For this, open the **values.yaml** file and update the `image.repository` and `image.tag` parameters.

6. Run the following command to deploy the DNS Stub.

**Using Helm:**

```
helm install -name ocdns ocdns-bind-24.2.17.tgz --namespace ocbsf -f ocdns-
bind/values.yaml
```

7. Capture the `cluster` name of the deployment , namespace where `nfstubs` are deployed, and the cluster IP of DNS Stub.

To capture the DNS Stub cluster IP:

```
kubectl get svc -n ocbsf | grep dns
```

Sample output:

```
[cloud-user@platform-bastion-1 ocdns-pkg-24.2.17.0.0]$ kubectl get svc -n
ocbsf | grep dns
NAME          TYPE          CLUSTER-IP      EXTERNAL-IP
PORT(S)      AGE
ocdns        ClusterIP     10.233.11.45    <none>        53/
UDP, 6236/TCP 19h
```

To capture the cluster name:

```
kubectl -n kube-system get configmap kubeadm-config -o yaml | grep
clusterName
```

Sample output:

```
clusterName: platform
```

### 3.1.6.4 Deploying occliam Simulator in Kubernetes Cluster

To deploy occliam Simulator in Kubernetes cluster, perform the following steps:

1. Go to the ocats-bsf-tools-24.2.4.0.0 folder and run the following command to extract the ocstub tar file content:

```
tar -zxvf occliam-pkg-24.2.17.0.0.tgz
```

Sample output:

```
[cloud-user@platform-bastion-1 occliam-pkg-24.2.17.0.0]$ ls -ltrh
total 908M
-rw-----. 1 cloud-user cloud-user 908M Mar 14 14:49 occliam-sim-
image-24.2.17.tar
-rw-r--r--. 1 cloud-user cloud-user 3.8K Mar 14 14:49 occliam-
sim-24.2.17.tgz
```

2. Run the following command in your cluster to load the DNS STUB image:

```
docker load --input occliam-sim-image-24.2.17.tar
```

3. Run the following commands to tag and push the DNS STUB image:

```
docker tag occliam-sim:24.2.17 localhost:5000/occliam-sim:24.2.17
docker push localhost:5000/occliam-sim:24.2.17
```

4. Run the following command to untar the helm charts, occliam-sim-24.2.17.tgz.

```
tar -zxvf occliam-sim-24.2.17.tgz
```

5. Update the registry name, image name and tag (if required) in the occliam-sim/values.yaml file as required. For this, open the **values.yaml** file and update the image.repository and image.tag parameters.

6. Run the following command to deploy the Diam Sim.

**Using Helm:**

```
helm install -name occliam-sim occliam-sim --namespace ocbscf -f occliam-sim/
values.yaml
```

Output:

```
occliam-sim-69968444b6-fg6ks          1/1      Running    0
5h47m
```

Sample of BSF namespace with BSF and ATS after installation:

```
[cloud-user@platform-bastion-1 ocstub-pkg-24.2.6.0.0]$ kubectl get po -n ocbsf
NAME                                READY   STATUS
RESTARTS   AGE
ocbsf-appinfo-6fc99ffb85-f96j2      1/1     Running
1         3d23h
ocbsf-bsf-management-service-df6b68d75-m77dv  1/1     Running
0         3d23h
ocbsf-oc-config-79b5444f49-7pwzx     1/1     Running
0         3d23h
ocbsf-oc-diam-connector-77f7b855f4-z2p88  1/1     Running
0         3d23h
ocbsf-oc-diam-gateway-0              1/1     Running
0         3d23h
ocbsf-ocats-bsf-5d8689bc77-cxdvx     1/1     Running
0         3d23h
ocbsf-ocbsf-egress-gateway-644555b965-pkxsb  1/1     Running
0         3d23h
ocbsf-ocbsf-ingress-gateway-7558b7d5d4-lfs5s  1/1     Running
4         3d23h
ocbsf-ocbsf-nrf-client-nfmanagement-d6b955b48-4pptk  1/1     Running
0         3d23h
ocbsf-ocdns-ocdns-bind-75c964648-j5fsd     1/1     Running
0         3d23h
ocbsf-ocpm-cm-service-7775c76c45-xgztj     1/1     Running
0         3d23h
ocbsf-ocpm-queryservice-646cb48c8c-d72x4    1/1     Running
0         3d23h
ocbsf-performance-69fc459ff6-frrvs         1/1     Running
4         3d23h
ocbsfnf11stub-7bffd6dcd7-ftm5f             1/1     Running
0         3d23h
ocbsfnf12stub-547f7cb99f-7mpll             1/1     Running
0         3d23h
ocbsfnf1stub-bdd97cb9-xjrkx                1/1     Running
0         3d23h
ocdiam-sim-69968444b6                      1/1     Running
0         3d23h
```

## 3.1.7 Post-Installation Steps

The section describes post-installation steps that users should perform after deploying ATS and stub pods.

### Alternate Route Service Configurations

To edit the Alternate Route Service deployment file (ocbcf-ocbsf-alternate-route) that points to DNS Stub, perform the following steps:

1. Run the following command to get searches information from dns-bind pod to enable communication between Alternate Route and dns-bind service:

```
kubectl exec -it <dns-bind pod> -n <NAMESPACE> -- /bin/bash -c 'cat /etc/
resolv.conf' | grep search | tr ' ' '\n' | grep -v 'search'
```

The following output is displayed after running the command:

**Figure 3-2 Sample Output**

```
flanders@bastion-1 ~]$ kubectl exec -it ocdns-stub-ocdns-bind-7467cf56c8-5d9g2 -n flanders-ns -- /bin/bash -c 'cat /etc/resolv.conf | grep search | tr
'\n' | grep -v 'search'
flanders-ns.svc.inferno.lab.us.oracle.com
svc.inferno.lab.us.oracle.com
inferno.lab.us.oracle.com
```

By default alternate service will point to CoreDNS and you will see following settings in deployment file:

**Figure 3-3 Alternate Route Service Deployment File**

```
terminationMessagePolicy: File
dnsPolicy: ClusterFirst
restartPolicy: Always
```

2. Run the following command to edit the deployment file and add the following content in alternate service to query DNS stub:

```
$kubectl edit deployment ocpcf-occpn-alternate-route -n ocpcf
```

- a. Add the IP Address of the nameserver that you have recorded after installing the DNS stub (cluster IP Address of DNS Stub).
- b. Add the search information one by one which you recorded earlier.
- c. Set dnsPolicy to "None".

```
dnsConfig:
  nameservers:
    - 10.233.33.169      // cluster IP of DNS Stub
  searches:
    - ocpcf.svc.occne15-ocpcf-ats
    - svc.occne15-ocpcf-ats
    - occne15-ocpcf-ats
dnsPolicy: None
```

For example:

**Figure 3-4 Example**

```
terminationMessagePath: /dev/termination-log
terminationMessagePolicy: File
dnsConfig:
  nameservers:
    - 10.233.31.245
  searches:
    - flanders-ns.svc.inferno.lab.us.oracle.com
    - svc.inferno.lab.us.oracle.com
    - inferno.lab.us.oracle.com
dnsPolicy: None
restartPolicy: Always
schedulerName: default-scheduler
```

**NRF client configmap**

1. In the **application-config** configmap, configure the following parameters with the respective values:
  - `primaryNrfApiRoot=nf1stub.<namespace_gostubs_are_deployed_in>.svc:8080`  
**Example:** `primaryNrfApiRoot=nf1stub.ocats.svc:8080`
  - `secondaryNrfApiRoot=nf11stub.<namespace_gostubs_are_deployed_in>.svc:8080`  
**Example:** `secondaryNrfApiRoot=nf11stub.ocats.svc:8080`
  - `virtualNrfFqdn = nf1stub.<namespace_gostubs_are_deployed_in>.svc`  
**Example:** `virtualNrfFqdn=nf1stub.ocats.svc`

**Note**

To get all configmaps in your namespace, run the following command:  
`kubectl get configmaps -n <BSF_namespace>`

2. (Optional) If persistent volume is used, follow the post-installation steps provided in the [Persistent Volume for 5G ATS](#) section.

## 3.2 Installing ATS for NEF

Following are the ATS installation procedures for NEF:

1. [Downloading the ATS Package](#)
2. [Pushing the Images to Customer Docker Registry](#)
3. [Configuring ATS](#)
  - a. [Enabling Static Port](#)
4. [Deploying ATS, Stub and CNC Console in Kubernetes Cluster](#)
5. [Verifying ATS Deployment](#)

### 3.2.1 Resource Requirements

This section describes the ATS resource requirements for NEF.

**Overview - Total Number of Resources**

The following table describes the overall resource usage in terms of CPUs, memory, and storage for the following:

- NEF SUT
- cnDBTier
- ATS

**Table 3-5 NEF - Total Number of Resources**

| Resource Name   | CPU  | Memory (GB) | Storage (GB) |
|-----------------|------|-------------|--------------|
| NEF SUT Totals  | 21.6 | 21.6        | 4            |
| cnDBTier Totals | 40   | 40          | 20           |

**Table 3-5 (Cont.) NEF - Total Number of Resources**

| Resource Name              | CPU  | Memory (GB) | Storage (GB) |
|----------------------------|------|-------------|--------------|
| ATS Totals                 | 4    | 3           | 0            |
| <b>Grand Total NEF ATS</b> | 65.6 | 64.6        | 24           |

**NEF Pods Resource Requirements Details**

This section describes the resource requirements, which are needed to deploy NEF ATS successfully.

**Table 3-6 NEF Pods Resource Requirements Details**

| Microservice                  | CPUs<br>Require<br>d per<br>Pod | Memory<br>Require<br>d per<br>Pod<br>(GB) | Storage<br>PVC<br>Require<br>d per<br>Pod<br>(GB) | #<br>Replica<br>s<br>(regular<br>deploy<br>ment) | #<br>Replica<br>s (ATS<br>deploy<br>ment) | CPUs<br>Require<br>d - Total | Memory<br>Require<br>d - Total<br>(GB) | Storage<br>PVC<br>Require<br>d - Total<br>(GB) |
|-------------------------------|---------------------------------|-------------------------------------------|---------------------------------------------------|--------------------------------------------------|-------------------------------------------|------------------------------|----------------------------------------|------------------------------------------------|
| oc_nef_ccfclient_m<br>anager  | 0.7                             | 0.7                                       | 0                                                 | 2                                                | 1                                         | 0.7                          | 0.7                                    | 0                                              |
| oc_nef_monitoring<br>_events  | 1                               | 1                                         | 0                                                 | 2                                                | 1                                         | 1                            | 1                                      | 0                                              |
| oc_nef_quality_of_<br>service | 1                               | 1                                         | 0                                                 | 2                                                | 1                                         | 1                            | 1                                      | 0                                              |
| oc_nef_aef_apirout<br>er      | 1                               | 1                                         | 0                                                 | 2                                                | 1                                         | 1                            | 1                                      | 0                                              |
| oc_nef_apd_mana<br>ger        | 0.7                             | 0.7                                       | 0                                                 | 1                                                | 1                                         | 0.7                          | 0.7                                    | 0                                              |
| oc_nef_5gcagent               | 0.7                             | 0.7                                       | 0                                                 | 2                                                | 1                                         | 0.7                          | 0.7                                    | 0                                              |
| oc_nef_expiry_audi<br>tor     | 0.7                             | 0.7                                       | 0                                                 | 2                                                | 1                                         | 0.7                          | 0.7                                    | 0                                              |
| oc_capif_afmgr                | 0.7                             | 0.7                                       | 0                                                 | 2                                                | 1                                         | 0.7                          | 0.7                                    | 0                                              |
| oc_capif_apimgr               | 0.7                             | 0.7                                       | 0                                                 | 2                                                | 1                                         | 0.7                          | 0.7                                    | 0                                              |
| oc_capif_eventmgr             | 0.7                             | 0.7                                       | 0                                                 | 2                                                | 1                                         | 0.7                          | 0.7                                    | 0                                              |
| ocingress_gateway             | 1                               | 1                                         | 0                                                 | 2                                                | 1                                         | 1                            | 1                                      | 0                                              |
| ocgress_gateway               | 1                               | 1                                         | 0                                                 | 2                                                | 1                                         | 1                            | 1                                      | 0                                              |
| nrf-client                    | 1                               | 1                                         | 0                                                 | 1                                                | 1                                         | 1                            | 1                                      | 0                                              |
| oc-app-info                   | 1                               | 1                                         | 0                                                 | 1                                                | 1                                         | 1                            | 1                                      | 0                                              |
| oc-perf-info                  | 1                               | 1                                         | 0                                                 | 1                                                | 1                                         | 1                            | 1                                      | 0                                              |
| oc-config-server              | 1                               | 1                                         | 0                                                 | 1                                                | 1                                         | 1                            | 1                                      | 0                                              |
| ocnef-<br>trafficinfluence    | 0.5                             | 0.5                                       | 0                                                 | 1                                                | 1                                         | 0.5                          | 0.5                                    | 0                                              |
| nrf-client-discovery          | 1                               | 1                                         | 0                                                 | 1                                                | 1                                         | 1                            | 1                                      | 0                                              |
| oc_nef_diam_gate<br>way       | 1                               | 1                                         | 0                                                 | 1                                                | 1                                         | 1                            | 1                                      | 0                                              |
| oc_nef_device_trig<br>ger     | 1                               | 1                                         | 0                                                 | 1                                                | 1                                         | 1                            | 1                                      | 0                                              |
| poolmanager                   | 1                               | 1                                         | 0                                                 | 1                                                | 1                                         | 1                            | 1                                      | 0                                              |
| msisdlessmosms                | 1                               | 1                                         | 0                                                 | 1                                                | 1                                         | 1                            | 1                                      | 0                                              |

**Table 3-6 (Cont.) NEF Pods Resource Requirements Details**

| Microservice          | CPUs<br>Require<br>d per<br>Pod | Memory<br>Require<br>d per<br>Pod<br>(GB) | Storage<br>PVC<br>Require<br>d per<br>Pod<br>(GB) | # Replica<br>s<br>(regular<br>deploy<br>ment) | # Replica<br>s (ATS<br>deploy<br>ment) | CPUs<br>Require<br>d - Total | Memory<br>Require<br>d - Total<br>(GB) | Storage<br>PVC<br>Require<br>d - Total<br>(GB) |
|-----------------------|---------------------------------|-------------------------------------------|---------------------------------------------------|-----------------------------------------------|----------------------------------------|------------------------------|----------------------------------------|------------------------------------------------|
| consoledataservice    | 0.5                             | 0.5                                       | 0                                                 | 1                                             | 1                                      | 0.5                          | 0.5                                    | 0                                              |
| <b>NEF SUT Totals</b> |                                 |                                           |                                                   |                                               |                                        | <b>19.9</b>                  | <b>19.9</b>                            | <b>0</b>                                       |

**ATS Resource Requirements details for NEF**

This section describes the ATS resource requirements, which are needed to deploy NEF ATS successfully.

**Table 3-7 ATS Resource Requirements Details**

| Microservice      | CPUs<br>Require<br>d per<br>Pod | Memory<br>Require<br>d per<br>Pod<br>(GB) | Storage<br>PVC<br>Require<br>d per<br>Pod<br>(GB) | # Replica<br>s<br>(regular<br>deploy<br>ment) | # Replica<br>s (ATS<br>deploy<br>ment) | CPUs<br>Require<br>d - Total | Memory<br>Require<br>d - Total<br>(GB) | Storage<br>PVC<br>Require<br>d - Total<br>(GB) |
|-------------------|---------------------------------|-------------------------------------------|---------------------------------------------------|-----------------------------------------------|----------------------------------------|------------------------------|----------------------------------------|------------------------------------------------|
| ATS Behave        | 2                               | 1                                         | 0                                                 | 0                                             | 1                                      | 2                            | 1                                      | 0                                              |
| ocstub-nef-af     | 0.5                             | 1                                         | 0                                                 | 0                                             | 1                                      | 0.5                          | 1                                      | 0                                              |
| ocstub-nef-nrf    | 0.5                             | 0.5                                       | 0                                                 | 0                                             | 1                                      | 0.5                          | 0.5                                    | 0                                              |
| ocstub-nef-udm    | 0.5                             | 1                                         | 0                                                 | 0                                             | 1                                      | 0.5                          | 1                                      | 0                                              |
| ocstub-nef-gmlc   | 0.5                             | 1                                         | 0                                                 | 0                                             | 1                                      | 0.5                          | 1                                      | 0                                              |
| ocstub-nef-bsf    | 1                               | 1                                         | 0                                                 | 2                                             | 1                                      | 1                            | 1                                      | 0                                              |
| ocstub-nef-pcf    | 1                               | 1                                         | 0                                                 | 2                                             | 1                                      | 1                            | 1                                      | 0                                              |
| ocstub-nef-udr    | 1                               | 1                                         | 0                                                 | 2                                             | 1                                      | 1                            | 1                                      | 0                                              |
| ocstub-diam-nef   | 1                               | 0.5                                       | 0                                                 | 2                                             | 1                                      | 1                            | 1                                      | 0                                              |
| <b>ATS Totals</b> |                                 |                                           |                                                   |                                               |                                        | <b>8</b>                     | <b>8.5</b>                             | <b>0</b>                                       |

**cnDBTier Resource Requirements Details for NEF**

This section describes the cnDBTier resource requirements, which are needed to deploy NEF ATS successfully.

**Note**

For cnDBTier pods, a minimum of 4 worker nodes are required.



Table 3-8 cnDBTier Resource Requirements

| Microservice                             | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | # Replicas (regular deployment) | # Replicas (ATS deployment) | CPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|------------------------------------------|-----------------------|------------------------------|-----------------------------------|---------------------------------|-----------------------------|-----------------------|------------------------------|-----------------------------------|
| virt-launcher-dt-1.cluster.local         | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| virt-launcher-dt-2.cluster.local         | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| virt-launcher-dt-3.cluster.local         | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| virt-launcher-dt-4.cluster.local         | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| virt-launcher-mt-1.cluster.local         | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| virt-launcher-mt-2.cluster.local         | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| virt-launcher-mt-3.cluster.local         | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| virt-launcher-sq-1.cluster.local         | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| virt-launcher-sq-2.cluster.local         | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| virt-launcher-db-installer.cluster.local | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| <b>cnDBTier Totals</b>                   |                       |                              |                                   |                                 |                             | 40                    | 40                           | 20                                |

## 3.2.2 Downloading the ATS Package

### Locating and Downloading ATS Images

To locate and download the ATS Image from MOS:

1. Log in to [My Oracle Support](#) using the appropriate credentials.
2. Select the **Patches & Updates** tab.
3. In the **Patch Search** window, click **Product or Family (Advanced)**.
4. Enter *Oracle Communications Cloud Native Core - 5G* in the **Product** field.
5. Select *Oracle Communications Cloud Native Network Exposure Function <release\_number>* from the **Release** drop-down.
6. Click **Search**. The **Patch Advanced Search Results** list appears.
7. Select the required ATS patch from the list. The Patch Details window appears.
8. Click **Download**. The File Download window appears.
9. Click the **<p>\*\*\*\*\*\_<release\_number>\_Tekelec</p>.zip** file to download the NEF ATS package file.

10. Untar the zip file to access all the ATS Images. The `<p*****_<release_number>_Tekelec>.zip` directory has following files:

```
ocats-nef-tools-pkg-24.2.0.0.0.tgz
ocats-nef-tools-pkg-24.2.0.0.0-README.txt
ocats-nef-tools-pkg-24.2.0.0.0.tgz.sha256
ocats-nef-custom-configtemplates-24.2.0.0.0.zip
ocats-nef-custom-configtemplates-24.2.0.0.0-README.txt
```

The `ocats-nef-tools-pkg-24.2.0.0.0-README.txt` file has all the information required for the package.

The `ocats-nef-tools-pkg-24.2.0.0.0.tgz` file has following images and charts packaged as tar files:

```
ocats-nef-tools-pkg-24.2.0.0.0.tgz
|
|_ _ _ _ _ ocats-nef-pkg-24.2.0.0.0.tgz
|         |_ _ _ _ _ ocats-nef-24.2.0.tgz (Helm Charts)
|         |_ _ _ _ _ ocats-nef-image-24.2.0.tar (Docker Images)
|         |_ _ _ _ _ OCATS-NEF-Readme.txt
|         |_ _ _ _ _ ocats-nef-24.2.0.tgz.sha256
|         |_ _ _ _ _ ocats-nef-image-24.2.0.tar.sha256
|         |_ _ _ _ _ ats_data-24.2.0.tar (ATS test scripts and Jenkins
data)
|         |_ _ _ _ _ ats_data-24.2.0.tar.sha256
|
|
|_ _ _ _ _ ocstub-nef-pkg-24.2.0.0.0.tgz
|         |_ _ _ _ _ ocstub-nef-24.2.0.tgz (Helm Charts)
|         |_ _ _ _ _ ocstub-nef-image-24.2.0.tar (Docker Images)
|         |_ _ _ _ _ ocstub-diam-nef-image-24.2.0.tar
|         |_ _ _ _ _ ocstub-diam-nef-image-24.2.0.tar.sha256
|         |_ _ _ _ _ OCSTUB-NEF-Readme.txt
|         |_ _ _ _ _ ocstub-nef-24.2.0.tgz.sha256
|         |_ _ _ _ _ ocstub-nef-image-24.2.0.tar.sha256
```

In addition to the above images and charts, there is a **ocats-nef-custom-configtemplates-24.2.0.0.0.zip** file in the package zip file. The **ocats-nef-custom-configtemplates-24.2.0.0.0-README.txt** file has information about this zip file.

ocats-nef-custom-configtemplates-24.2.0.0.0.zip

```
|
|
|_ _ _ocats-nef-custom-values.yaml (Custom values file for
installation)
|
|
|_ _ _ocats-nef-custom-serviceaccount.yaml (Template to create
custom service account)
|
|
|_ _ _ocstub-nef-custom-values.yaml (Custom values file for stub
installation)
```

11. Copy the tar file to the CNE, OCI, or Kubernetes cluster where you want to deploy ATS.

### 3.2.3 Pushing the Images to Customer Docker Registry

#### Preparing to deploy ATS and Stub Pod in Kubernetes Cluster

To deploy ATS and Stub Pod in Kubernetes Cluster:

1. Verify the checksums of tarballs mentioned in file Readme.txt.
2. Run the following command to extract tar file content.  
tar -xvf ocats-nef-tools-pkg-24.2.0.0.0.tgz

The output of this command is:

```
ocats-nef-pkg-24.2.0.0.0.tgz
ocstub-nef-pkg-24.2.0.0.0.tgz
```

3. Run the following command to extract the helm charts and docker images of ATS.  
tar -xvf ocats-nef-pkg-24.2.0.0.0.tgz

The output of this command is:

```
ocats-nef-image-24.2.0.tar
ocats-nef-24.2.0.tgz
OCATS-NEF-Readme.txt
```

#### Note

The OCATS-NEF-Readme.txt file has all the information required for the package.

4. Run the following command to untar the ocstub package.  
tar -xvf ocstub-nef-pkg-24.2.0.0.0.tgz

The output of this command is:

```
ocstub-nef-image-24.2.0.tar
ocstub-nef-24.2.0.tgz
ocstub-diam-nef-image-24.2.0.tar
OCSTUB-NEF-Readme.txt
```

5. Run the following command to extract the content of the custom configuration templates:  
unzip ocats-nef-custom-configtemplates-24.2.0.0.0.zip

The output of this command is:

```
ocats-nef-custom-values.yaml (Custom yaml file for deployment of OCATS-NEF)
ocats-nef-custom-serviceaccount.yaml (Custom yaml file for service account
creation to help the customer if required)
ocstub-nef-custom-values.yaml (Custom yaml file for deployment of OCSTUB-
NEF)
```

6. Run the following commands in your cluster to load the ATS docker image, 'ocats-nef-image-24.2.0.tar', and push it to your registry.

```
$ docker load -i ocats-nef-image-24.2.0.tar

$ docker tag ocats/ocats-nef:24.2.0 <local_registry>/ocats/ocats-nef:24.2.0

$ docker push <local_registry>/ocats/ocats-nef:24.2.0
```

7. Run the following commands in your cluster to load the ATS docker image, Stub docker image, 'ocstub-nef-image-24.2.0.tar' and push it to your registry.

```
$ docker load -i ocstub-nef-image-24.2.0.tar

$ docker tag ocats/ocstub-nef:24.2.0 <local_registry>/ocats/ocstub-
nef:24.2.0

$ docker push <local_registry>/ocats/ocstub-nef:24.2.0

$ docker load -i ocstub-diam-nef-image-24.2.0.tar

$ docker tag ocats/ocstub-diam-nef:24.2.0 <local_registry>/ocats/ocstub-
diam-nef:24.2.0

$ docker push <local_registry>/ocats/ocstub-diam-nef:24.2.0
```

8. Update the image name and tag in the ocats-nef-custom-values.yaml and ocstub-nef-custom-values.yaml files as required. For this, open the ocats-nef-custom-values.yaml and ocstub-nef-custom-values.yaml file and update the image.repository and image.tag parameters.

## 3.2.4 Configuring ATS

### 3.2.4.1 Enabling Static Port

1. To enable static port:

**Note**

ATS supports static port. By default, this feature is not available.

- In the **ocats-nef-custom-values.yaml** file under service section, set the **staticNodePortEnabled** parameter value to 'true' and **staticNodePort** parameter value with valid nodePort.

```
service:
  customExtension:
    labels: {}
    annotations: {}
  type: LoadBalancer
  port: "8080"
  staticNodePortEnabled: true
  staticNodePort: "32385"
```

### 3.2.5 Deploying ATS, Stub and CNC Console in Kubernetes Cluster

**Note**

It is important to ensure that all the four components; ATS, Stub, NEF and CNC Console are in the same namespace.

To run NEF test cases, you need **seven** stubs. The service name of the stubs should be `ocnefsim-ocstub-svc-af`, `ocnefsim-ocstub-svc-nrf`, `ocnefsim-ocstub-svc-bsf`, `ocnefsim-ocstub-svc-gmlc`, `ocnefsim-ocstub-svc-pcf`, `ocnefsim-ocstub-svc-udm`, and `ocnefsim-ocstub-svc-udr`.

ATS and Stub supports Helm2 and Helm3 for deployment.

If the namespace does not exist, run the following command to create a namespace:

```
kubectl create namespace ocnef
```

**Important**

- It is mandatory to use the `<release_name>` as `ocnefsim` while installing stubs.
- The ATS deployment with NEF does not support the Persistent Volume (PV) feature. Therefore, the default value of the deployment `.PVEnabled` parameter in the `ocats-nef-custom-values.yaml` must not be changed. By default, the parameter value is set to **false**.

#### Using Helm 2 for Deploying ATS:

```
helm install ocats-nef-24.2.0.tgz --name <release_name> --namespace
<namespace_name> -f <values-yaml-file>
```

Example:

```
helm install ocats-nef-24.2.0.tgz --name ocats --namespace ocnef -f ocats-nef-custom-values.yaml
```

#### Using Helm 2 for Deploying Stubs:

```
helm install ocstub-nef-24.2.0.tgz --name <release_name> --namespace <namespace_name> -f <values-yaml-file>
```

Example:

```
helm install ocstub-nef-24.2.0.tgz --name ocnefsim --namespace ocnef -f ocstub-nef-custom-values.yaml
```

#### Using Helm 3 for Deploying ATS:

```
helm3 install -name <release_name> ocats-nef-24.2.0.tgz --namespace <namespace_name> -f <values-yaml-file>
```

Example:

```
helm3 install -name ocats ocats-nef-24.2.0.tgz --namespace ocnef -f ocats-nef-custom-values.yaml
```

#### Using Helm 3 for Deploying Stubs:

```
helm3 install -name <release_name> ocstub-nef-24.2.0.tgz --namespace <namespace_name> -f <values-yaml-file>
```

Example:

```
helm3 install -name ocnefsim ocstub-nef-24.2.0.tgz --namespace ocnef -f ocstub-nef-custom-values.yaml
```

### 3.2.5.1 Deploy and Configure CNC Console

Perform the following steps to deploy and configure the CNC Console:

1. Install the CNC Console 24.2.0 in the same namespace where NEF ATS is installed. For further information, see *Oracle Communications Cloud Native Configuration Console Installation, Upgrade, and Fault Recovery Guide*.
2. Create user and assign the necessary roles to access the NEF CNC Console GUI.

**Note**

Following are the different roles to be assigned:

- ADMIN
- NEF\_WRITE
- NEF\_READ
- default-roles-cncc

### 3.2.5.2 Creating Console secrets

Run the following command to create the console secrets that contains **iam** and **console** passwords created in [Deploy and Configure CNC Console](#).

**Command:**

```
kubectl create secret generic ocats-console-secret --from-literal=cnc_console_password=<cncc-console-password> --from-literal=cnc_iam_password=<cnc_iam_password> -n <namespace>
```

**For example:**

```
kubectl create secret generic ocats-console-secret --from-literal=cnc_console_password=Nefuser@1 --from-literal=cnc_iam_password=abc123 -n ocnef
```

### 3.2.6 Verifying ATS Deployment

Run the following command to verify ATS deployment.

```
helm status <release_name>
```

Once ATS and Stub are deployed, run the following commands to check the pod and service deployment:

To check pod deployment:

```
kubectl get pod -n ocnef
```

To check service deployment:

```
kubectl get service -n ocnef
```

## 3.3 Installing ATS for NRF

Following are the ATS installation procedures for NRF:

1. [Downloading the ATS Package](#)
2. [Pushing the Images to Customer Docker Registry](#)

3. [Configuring ATS](#)
  - a. [Enabling Static Port](#)
  - b. [Enabling Aspen Service Mesh](#)
  - c. [Enabling Persistent Volume](#)
  - d. [Enabling NF FQDN Authentication](#)
4. [Deploying ATS and Stub in Kubernetes Cluster](#)
5. [Verifying ATS Deployment](#)
6. [Post-Installation Steps \(if Persistent Volume is Used\)](#)

### 3.3.1 Resource Requirements

This section describes the ATS resource requirements for NRF.

#### Overview - Total Number of Resources

The following table describes the overall resource usage in terms of CPUs, memory, and storage for the following:

- NRF SUT
- cnDBTier
- ATS

**Table 3-9 NRF - Total Number of Resources**

| Resource Name              | CPU          | Memory (Gi)  | Storage (Mi) |
|----------------------------|--------------|--------------|--------------|
| NRF SUT Totals             | 61           | 69           | 0            |
| DBTier Totals              | 40.5         | 50.5         | 720          |
| ATS Totals                 | 7            | 6            | 0            |
| <b>Grand Total NRF ATS</b> | <b>108.5</b> | <b>125.5</b> | <b>720</b>   |

#### NRF Pods Resource Requirements Details

For NRF Pods resource requirements, see *Oracle Communications Cloud Native Core, Network Repository Function Installation, Upgrade, and Fault Recovery Guide*.

#### ATS Resource Requirements details for NRF

This section describes the ATS resource requirements, which are needed to deploy NRF ATS successfully.

**Table 3-10 ATS Resource Requirements Details**

| Microservice      | CPUs<br>Require<br>d per<br>Pod | Memory<br>Require<br>d per<br>Pod<br>(GB) | Storage<br>PVC<br>Require<br>d per<br>Pod<br>(GB) | #<br>Replica<br>s<br>(regular<br>deploy<br>ment) | #<br>Replica<br>s (ATS<br>deploy<br>ment) | CPUs<br>Require<br>d - Total | Memory<br>Require<br>d - Total<br>(GB) | Storage<br>PVC<br>Require<br>d - Total<br>(GB) |
|-------------------|---------------------------------|-------------------------------------------|---------------------------------------------------|--------------------------------------------------|-------------------------------------------|------------------------------|----------------------------------------|------------------------------------------------|
| ATS Behave        | 2                               | 1                                         | 1                                                 | 1                                                | 1                                         | 2                            | 1                                      | 0                                              |
| ATS Stub (Python) | 1                               | 1                                         | 1                                                 | 1                                                | 5                                         | 5                            | 5                                      | 0                                              |



Table 3-10 (Cont.) ATS Resource Requirements Details

| Microservice | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | # Replicas (regular deployment) | # Replicas (ATS deployment) | CPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|--------------|-----------------------|------------------------------|-----------------------------------|---------------------------------|-----------------------------|-----------------------|------------------------------|-----------------------------------|
| ATS Totals   |                       |                              |                                   |                                 |                             | 7                     | 6                            | 0                                 |

**cnDBTier Resource Requirements Details for NRF**

This section describes the cnDBTier resource requirements, which are needed to deploy NRF ATS successfully.

**Note**

For cnDBTier pods, a minimum of 4 worker nodes are required.

Table 3-11 cnDBTier Services Resource Requirements

| Service Name                                   | Min Pod Replica # | Min CPU/Pod | Min Memory/Pod (in Gi) | PVC Size (in Gi) | Min Ephemeral Storage (Mi) |
|------------------------------------------------|-------------------|-------------|------------------------|------------------|----------------------------|
| MGMT (ndbmgmd)                                 | 2                 | 4           | 6                      | 15               | 90                         |
| DB (ndbmt)                                     | 4                 | 5           | 5                      | 4                | 90                         |
| SQL (ndbmysqld)                                | 2                 | 4           | 5                      | 8                | 90                         |
| SQL (ndbappmysqld)                             | 2                 | 2           | 3                      | 1                | 90                         |
| Monitor Service (db-monitor-svc)               | 1                 | 0.4         | 490 (Mi)               | NA               | 90                         |
| Backup Manager Service (db-backup-manager-svc) | 1                 | 0.1         | 130(Mi)                | NA               | 90                         |
| Replication Service - Leader                   | 1                 | 2           | 2                      | 2                | 90                         |
| Replication Service - Other                    | 0                 | 1           | 2                      | 0                | 90                         |

## 3.3.2 Downloading the ATS Package

**Locating and Downloading ATS Images**

To locate and download the ATS image from MOS:

1. Log in to [My Oracle Support](#) using the appropriate credentials.
2. Select the **Patches & Updates** tab.
3. In the **Patch Search** window, click **Product or Family (Advanced)**.
4. Enter *Oracle Communications Cloud Native Core - 5G* in the **Product** field.
5. Select *Oracle Communications Cloud Native Core Network Repository Function <release\_number>* from the **Release** drop-down.
6. Click **Search**. The **Patch Advanced Search Results** list appears.

7. Select the required ATS patch from the list. The Patch Details window appears.
8. Click **Download**. The File Download window appears.
9. Click the `<p*****_<release_number>_Tekelec>.zip` file to download the NRF ATS package file.
10. Untar the zip file to access all the ATS images. The `<p*****_<release_number>_Tekelec>.zip` directory has the following files:

```
ocats_ocnrf_csar_24_2_6_0_0.zip
ocats_ocnrf_csar_24_2_6_0_0.zip.sha256
ocats_ocnrf_csar_mcafee-24.2.6.0.0.log
```

11. **Note**

The above zip file contains all the images and custom values required for 24.2.6 release of OCATS-OCNRF.

The `ocats_ocnrf_csar_24_2_6_0_0.zip` file has the following files and folders:

```

├── Definitions
│   ├── ocats_ocnrf_ats_tests.yaml
│   └── ocats_ocnrf.yaml
├── Files
│   ├── ChangeLog.txt
│   ├── Helm
│   │   └── ocats-ocnrf-24.2.6.tgz
│   ├── Licenses
│   ├── ocats-nrf-24.2.6.tar
│   ├── Oracle.cert
│   ├── ocstub-py-24.2.7.tar
│   └── Tests
├── ocats_ocnrf.mf
├── Scripts
│   ├── ocats_ocnrf_custom_serviceaccount_24.2.6.yaml
│   ├── ocats_ocnrf_custom_values_24.2.6.yaml
│   └── ocats_ocnrf_tests_jenkinsjobs_24.2.6.tgz
├── TOSCA-Metadata
└── TOSCA.meta
```

12. Copy the zip file to Kubernetes cluster where you want to deploy ATS.

### 3.3.3 Pushing the Images to Customer Docker Registry

#### Preparing to Deploy ATS and Stub Pod in Kubernetes Cluster

To deploy ATS and Stub Pod in Kubernetes Cluster:

1. Run the following command to extract tar file content:

```
unzip ocats_ocnrf_csar_24_2_6_0_0.zip
```

The following docker image tar files are located at **Files** folder:

- ocats-nrf-24.2.6.tar
  - ocstub-py-24.2.7.tar
2. Run the following commands in your cluster to load the ATS docker image, 'ocats-nrf-24.2.6.tar' and Stub docker image 'ocstub-py-24.2.7.tar', and push it to your registry.

```
$ docker load -i ocats-nrf-24.2.6.tar
```

```
$ docker load -i ocstub-py-24.2.7.tar
```

```
$ docker tag ocats/ocats-nrf:24.2.6 <local_registry>/ocats/ocats-nrf:24.2.6
```

```
$ docker tag ocats/ocstub-py:24.2.7 <local_registry>/ocats/ocstub-py:24.2.7
```

```
$ docker push <local_registry>/ocats/ocats-nrf:24.2.6
```

```
$ docker push <local_registry>/ocats/ocstub-py:24.2.7
```

3. Create a copy of the custom values located at **Scripts/ocats\_ocrf\_custom\_values\_24.2.6.yaml** and update it for image name, tag and other parameters as per the requirement.

## 3.3.4 Configuring ATS

### 3.3.4.1 Enabling Static Port

1. To enable static port:

#### Note

ATS supports static port. By default, this feature is not available.

- In the **ocats-ocrf-custom-values.yaml** file under service section, set the **staticNodePortEnabled** parameter value to 'true' and **staticNodePort** parameter value with valid nodePort.

```
service:
  customExtension:
    labels: {}
    annotations: {}
  type: LoadBalancer
  port: "8080"
  staticNodePortEnabled: true
  staticNodePort: "32385"
```

### 3.3.4.2 Enabling Aspen Service Mesh

To enable service mesh for ATS:

1. To enable service mesh, set the value for **serviceMeshCheck** to **true**. The following is a snippet of the service section in the yaml file:

```
ocats-nrf:
  serviceMeshCheck: true
```

2. If the ASM is not enabled on the global level for the namespace, run the following command to enable it before deploying the ATS:

```
kubectl label --overwrite namespace <namespace_name> istio-
injection=enabled
```

For example:

```
kubectl label --overwrite namespace ocnrf istio-injection=enabled
```

3. Add the following annotations under the **lbDeployments** and **nonlbDeployments** section of the global section in **ocats-nrf-custom-values.yaml** file for ATS deployment as follows:

```
traffic.sidecar.istio.io/excludeInboundPorts: "8080"
```

```
traffic.sidecar.istio.io/excludeOutboundPorts: "9090"
```

For example:

```
lbDeployments:
  labels: {}
  annotations:
    traffic.sidecar.istio.io/excludeInboundPorts: "8080"
    traffic.sidecar.istio.io/excludeOutboundPorts: "9090"
```

```
lbDeployments:
  labels: {}
  annotations:
    traffic.sidecar.istio.io/excludeInboundPorts: "8090"
    traffic.sidecar.istio.io/excludeOutboundPorts: "9090"
```

```
nonlbServices:
  labels: {}
  annotations: {}
```

```
nonlbDeployments:
  labels: {}
  annotations:
    traffic.sidecar.istio.io/excludeInboundPorts: "8090"
    traffic.sidecar.istio.io/excludeOutboundPorts: "9090"
```

4. Add the following annotations in NRF deployment to work with ATS in service mesh environment:  
For example:

```
oracle.com/cnc: "true"
traffic.sidecar.istio.io/excludeInboundPorts: "9090,8095,8096,7,53"
traffic.sidecar.istio.io/excludeOutboundPorts: "9090,8095,8096,7,53"
```

```

lbDeployments:
  labels: {}
  annotations:
    oracle.com/cnc: "true"
    traffic.sidecar.istio.io/excludeInboundPorts: "9090,8095,8096,7,53"
    traffic.sidecar.istio.io/excludeOutboundPorts:
"9090,8095,8096,7,53"

nonlbServices:
  labels: {}
  annotations: {}

nonlbDeployments:
  labels: {}
  annotations:
    oracle.com/cnc: "true"
    traffic.sidecar.istio.io/excludeInboundPorts: "9090,8095,8096,7,53"
    traffic.sidecar.istio.io/excludeOutboundPorts:
"9090,8095,8096,7,53"

```

#### Note

If the above annotations are not provided in NRF deployment under lbDeployments and nonlbDeployments, all the metrics and alerts related test cases will fail.

### 3.3.4.3 Enabling Persistent Volume

ATS supports Persistent storage to retain ATS historical build execution data, test cases, and one-time environment variable configurations.

To enable persistent storage:

1. Create a PVC and associate the same to the ATS pod.
2. Set the **PVEnabled** flag to **true**.
3. Set **PVClaimName** to PVC that is created for ATS.

```

deployment:
  customExtension:
    labels: {}
    annotations: {}
    PVEnabled: true
    PVClaimName: "ocats-nrf-24.2.6-pvc"

```

For more details on Persistent Volume Storage, you can refer to [Persistent Volume for 5G ATS](#).

### 3.3.4.4 Enabling NF FQDN Authentication

#### Note

This procedure is applicable only if the NF FQDN Authentication feature is being tested else, proceed to the ["Deploying ATS and Stub in Kubernetes Cluster"](#) section.

You must enable this feature while deploying Service Mesh. For more information on how to enable NF FQDN Authentication feature, see *Oracle Communications Cloud Native Core, Network Repository Function User Guide*.

However, there is some change in the ATS deployment process, which is as follows:

1. Use previously unzipped file **"ocats-nrf-custom-serviceaccount-24.2.6.yaml"** to create a service account. Add the following annotation in the **"ocats-nrf-custom-serviceaccount-24.2.6.yaml"** file where the kind is ServiceAccount.  
"certificate.aspenmesh.io/customFields": '{ "SAN": { "DNS": [ "<NF-FQDN>" ] } }'

Sample format:

```
apiVersion: v1
kind: ServiceAccount
metadata:
  name: ocats-custom-serviceaccount
  namespace: ocnrf
  annotations:
    "certificate.aspenmesh.io/customFields": '{ "SAN": { "DNS":
[ "AMF.d5g.oracle.com" ] } }'
```

#### Note

"AMF.d5g.oracle.com" is the NF FQDN that you must provide in the serviceaccount DNS field.

2. Run the following command to create a service account:  
kubectl apply -f ocats-nrf-custom-serviceaccount-24.2.6.yaml
3. Update the service account name in the **ocats-ocnrf-custom-values-24.2.6.yaml** file as follows:

```
ocats-nrf:
  serviceAccountName: "ocats-custom-serviceaccount"
```

### 3.3.5 Deploying ATS and Stub in Kubernetes Cluster

#### Note

It is important to ensure that all the three components; ATS, Stub and NRF are in the same namespace.

ATS and Stub supports Helm3 for deployment.

If the namespace does not exists, run the following command to create a namespace:

```
kubectl create namespace ocnrf
```

### Using Helm for Deploying ATS:

```
helm install <release_name> ocats-ocnrf-24.2.6.tgz --namespace  
<namespace_name> -f <values-yaml-file>
```

Example:

```
helm install ocats ocats-ocnrf-24.2.6.tgz --namespace ocnrf -f ocats-ocnrf-  
custom-values.yaml
```

#### Note

The above helm install command will deploy ATS along with the stub servers required for ATS executions, which include 1 ATS pod and 5 stub server pods.

## 3.3.6 Verifying ATS Deployment

Run the following command to verify ATS deployment.

```
helm status <release_name>
```

Once ATS and Stub are deployed, run the following command to check the pod and service deployment.

#### Checking Pod Deployment:

```
kubectl get pod -n ocnrf
```

#### Checking Service Deployment:

```
kubectl get service -n ocnrf
```

**Figure 3-5 Checking Pod Deployment without Service Mesh**

| NAME                                    | READY | STATUS  | RESTARTS | AGE   |
|-----------------------------------------|-------|---------|----------|-------|
| ocats-ocats-nrf-658df6b9c9-vn9jv        | 1/1   | Running | 0        | 2d2h  |
| ocnrf-alternate-route-688cb7bbc5-82whg  | 1/1   | Running | 0        | 7m34s |
| ocnrf-appinfo-74d5cf9c75-kvffz          | 1/1   | Running | 0        | 7m35s |
| ocnrf-egressgateway-6f94cc46cf-qxzjc    | 1/1   | Running | 0        | 7m29s |
| ocnrf-ingressgateway-5bd6779bc6-4z296   | 1/1   | Running | 0        | 7m24s |
| ocnrf-nfaccess-token-7676857798-7fw8h   | 1/1   | Running | 0        | 7m35s |
| ocnrf-nfdiscovery-7ffdcdbd865-bgnqj     | 1/1   | Running | 0        | 7m28s |
| ocnrf-nfregistration-68b597df4c-tz8rj   | 1/1   | Running | 0        | 7m26s |
| ocnrf-nfsubscription-65f89d7cc7-klxns   | 1/1   | Running | 0        | 7m28s |
| ocnrf-nrfartisan-d56dc784-bq7tp         | 1/1   | Running | 0        | 7m37s |
| ocnrf-nrfauditor-6bb5c8fb87-896xs       | 1/1   | Running | 0        | 7m38s |
| ocnrf-nrfcachedata-695985f988-jp7h9     | 1/1   | Running | 0        | 7m29s |
| ocnrf-nrfconfiguration-6dbcd88f97-22s14 | 1/1   | Running | 0        | 7m36s |
| stub1-7bd7bf7574-nkjnm                  | 1/1   | Running | 0        | 2d2h  |
| stub2-7b9ddcbc49-579fv                  | 1/1   | Running | 0        | 2d2h  |
| stub3-f7794fbfb-gg5fm                   | 1/1   | Running | 0        | 2d2h  |
| stub4-7bdcd98667-f2gbn                  | 1/1   | Running | 0        | 2d2h  |
| stub5-899bcb978-2gh6m                   | 1/1   | Running | 0        | 2d2h  |

Figure 3-6 Checking Service Deployment without Service Mesh

| NAME                                                     | TYPE         | CLUSTER-IP    | EXTERNAL-IP | PORT(S)                                        | AGE  |
|----------------------------------------------------------|--------------|---------------|-------------|------------------------------------------------|------|
| amf1-cluster1-net2-amf-5gc-mnc016-mcc310-3gppnetwork-org | LoadBalancer | 10.233.3.237  | <pending>   | 8080:32014/TCP, 8081:30259/TCP, 8443:31359/TCP | 3d2h |
| notify-stub-service                                      | LoadBalancer | 10.233.58.68  | <pending>   | 8080:31969/TCP, 8081:32610/TCP, 8443:32356/TCP | 3d2h |
| notify-stub-service02                                    | LoadBalancer | 10.233.43.100 | <pending>   | 8080:30213/TCP, 8081:32087/TCP, 8443:30194/TCP | 3d2h |
| notify-stub-service03                                    | LoadBalancer | 10.233.31.107 | <pending>   | 8080:30238/TCP, 8081:31109/TCP, 8443:32255/TCP | 3d2h |
| ocats-ocats-nrf                                          | LoadBalancer | 10.233.16.95  | <pending>   | 8080:32653/TCP                                 | 3d2h |
| ocnrf-alternate-route                                    | ClusterIP    | 10.233.40.203 | <none>      | 80/TCP                                         | 45h  |
| ocnrf-altsvc-cache                                       | ClusterIP    | None          | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-egressgateway                                      | ClusterIP    | 10.233.23.211 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-egw-cache                                          | ClusterIP    | None          | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-igw-cache                                          | ClusterIP    | None          | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-ingressgateway                                     | LoadBalancer | 10.233.41.30  | <pending>   | 80:31501/TCP                                   | 90d  |
| ocnrf-nfaccess token                                     | ClusterIP    | 10.233.49.192 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nfdiscovery                                        | ClusterIP    | 10.233.31.176 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nfregistration                                     | ClusterIP    | 10.233.47.105 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nfsubscription                                     | ClusterIP    | 10.233.56.47  | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nrfartisan                                         | ClusterIP    | 10.233.49.170 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nrfauditor                                         | ClusterIP    | 10.233.5.30   | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nrfcachedata                                       | ClusterIP    | 10.233.28.20  | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nrfconfiguration                                   | LoadBalancer | 10.233.27.134 | <pending>   | 8080:31941/TCP                                 | 90d  |
| ocnrf-ocnrf-app-info                                     | ClusterIP    | 10.233.25.191 | <none>      | 5906/TCP                                       | 45h  |
| ocnrf-ocnrf-perf-info                                    | ClusterIP    | 10.233.5.8    | <none>      | 5905/TCP                                       | 45h  |
| slf-stub-service01                                       | LoadBalancer | 10.233.62.84  | <pending>   | 80:30178/TCP, 8081:30891/TCP, 8443:30223/TCP   | 3d2h |

If ATS is deployed with side car of service mesh, ensure that both ATS and Stub pods have two containers in ready state and shows "2/2" as follows:

Figure 3-7 ATS and Stub Deployed with Service Mesh

| NAME                                    | READY | STATUS  | RESTARTS | AGE  |
|-----------------------------------------|-------|---------|----------|------|
| ocats-ocats-nrf-855d874786-6w7n8        | 2/2   | Running | 0        | 3d2h |
| ocnrf-alternate-route-57f4978469-ffn9w  | 2/2   | Running | 0        | 45h  |
| ocnrf-appinfo-857c79bdc4-ngb5t          | 2/2   | Running | 0        | 45h  |
| ocnrf-egressgateway-7d5dc479b-tfjffj    | 2/2   | Running | 0        | 45h  |
| ocnrf-ingressgateway-6bfb85865f-d29xr   | 2/2   | Running | 0        | 45h  |
| ocnrf-nfaccess token-5bbdb6f4c9-f5c6q   | 2/2   | Running | 0        | 45h  |
| ocnrf-nfdiscovery-68db8f4c8d-dwfgw      | 2/2   | Running | 0        | 45h  |
| ocnrf-nfregistration-759c668c77-rrk7q   | 2/2   | Running | 0        | 45h  |
| ocnrf-nfsubscription-7c54b77669-v8msn   | 2/2   | Running | 0        | 45h  |
| ocnrf-nrfartisan-5b8f48bff7-z985q       | 2/2   | Running | 0        | 45h  |
| ocnrf-nrfauditor-6cdb597c67-qmmp7       | 2/2   | Running | 0        | 45h  |
| ocnrf-nrfcachedata-7c8967fbc8-npbwh     | 2/2   | Running | 0        | 45h  |
| ocnrf-nrfcachedata-7c8967fbc8-sp4pl     | 2/2   | Running | 0        | 45h  |
| ocnrf-nrfconfiguration-75b8c67dfb-r8qht | 2/2   | Running | 0        | 45h  |
| ocnrf-performance-5cf895dc75-4252k      | 2/2   | Running | 0        | 45h  |
| ocnrf-performance-5cf895dc75-g9f8x      | 2/2   | Running | 0        | 45h  |
| stub1-7698cf45d5-hncsh                  | 2/2   | Running | 0        | 3d2h |
| stub2-58bd5bfb4-h6xq9                   | 2/2   | Running | 0        | 3d2h |
| stub3-5b596bbb59-488rm                  | 2/2   | Running | 0        | 3d2h |
| stub4-5b84bc67d6-gmnqs                  | 2/2   | Running | 0        | 3d2h |
| stub5-66cd68f97c-1s5kn                  | 2/2   | Running | 0        | 3d2h |

Figure 3-8 ATS and Stub Deployed with Service Mesh

| NAME                                                     | TYPE         | CLUSTER-IP    | EXTERNAL-IP | PORT(S)                                        | AGE  |
|----------------------------------------------------------|--------------|---------------|-------------|------------------------------------------------|------|
| amf1-cluster1-net2-amf-5gc-mnc016-mcc310-3gppnetwork-org | LoadBalancer | 10.233.3.237  | <pending>   | 8080:32014/TCP, 8081:30259/TCP, 8443:31359/TCP | 3d2h |
| notify-stub-service                                      | LoadBalancer | 10.233.58.68  | <pending>   | 8080:31969/TCP, 8081:32610/TCP, 8443:32356/TCP | 3d2h |
| notify-stub-service02                                    | LoadBalancer | 10.233.43.100 | <pending>   | 8080:30213/TCP, 8081:32087/TCP, 8443:30194/TCP | 3d2h |
| notify-stub-service03                                    | LoadBalancer | 10.233.31.107 | <pending>   | 8080:30238/TCP, 8081:31109/TCP, 8443:32255/TCP | 3d2h |
| ocats-ocats-nrf                                          | LoadBalancer | 10.233.16.95  | <pending>   | 8080:32653/TCP                                 | 3d2h |
| ocnrf-alternate-route                                    | ClusterIP    | 10.233.40.203 | <none>      | 80/TCP                                         | 45h  |
| ocnrf-altsvc-cache                                       | ClusterIP    | None          | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-egressgateway                                      | ClusterIP    | 10.233.23.211 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-egw-cache                                          | ClusterIP    | None          | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-igw-cache                                          | ClusterIP    | None          | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-ingressgateway                                     | LoadBalancer | 10.233.41.30  | <pending>   | 80:31501/TCP                                   | 90d  |
| ocnrf-nfaccess token                                     | ClusterIP    | 10.233.49.192 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nfdiscovery                                        | ClusterIP    | 10.233.31.176 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nfregistration                                     | ClusterIP    | 10.233.47.105 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nfsubscription                                     | ClusterIP    | 10.233.56.47  | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nrfartisan                                         | ClusterIP    | 10.233.49.170 | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nrfauditor                                         | ClusterIP    | 10.233.5.30   | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nrfcachedata                                       | ClusterIP    | 10.233.28.20  | <none>      | 8080/TCP                                       | 45h  |
| ocnrf-nrfconfiguration                                   | LoadBalancer | 10.233.27.134 | <pending>   | 8080:31941/TCP                                 | 90d  |
| ocnrf-ocnrf-app-info                                     | ClusterIP    | 10.233.25.191 | <none>      | 5906/TCP                                       | 45h  |
| ocnrf-ocnrf-perf-info                                    | ClusterIP    | 10.233.5.8    | <none>      | 5905/TCP                                       | 45h  |
| slf-stub-service01                                       | LoadBalancer | 10.233.62.84  | <pending>   | 80:30178/TCP, 8081:30891/TCP, 8443:30223/TCP   | 3d2h |



### 3.3.7 Post-Installation Steps (if Persistent Volume is Used)

If persistent volume is used, follow the post-installation steps mentioned in the [Persistent Volume for 5G ATS](#) section.

## 3.4 Installing ATS for NSSF

The procedure to install ATS for NSSF covers three steps:

1. [Resource Requirements](#)
2. [Locating and downloading ATS Images](#)
3. [Deploying ATS and Stub Pod in Kubernetes Cluster](#)

### 3.4.1 Resource Requirements

#### Total Number of Resources

The total number of resource requirements are as follows:

**Table 3-12 Total Number of Resources**

| Resource             | CPUs | Memory(GB) | Storage(GB) |
|----------------------|------|------------|-------------|
| NSSF SUT Total       | 30.2 | 22         | 4           |
| cnDBTier Total       | 40   | 40         | 20          |
| ATS Total            | 5    | 5          | 0           |
| Grand Total NSSF ATS | 75.2 | 67         | 24          |

#### Resource Details

The details of resources required to install NSSF-ATS are as follows:

**Table 3-13 Resource Details**

| Microservice     | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | CPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|------------------|-----------------------|------------------------------|-----------------------------------|-------------------------------|---------------------------|-----------------------|------------------------------|-----------------------------------|
| <b>NSSF Pods</b> |                       |                              |                                   |                               |                           |                       |                              |                                   |
| ingressgateway   | 4                     | 4                            | 0                                 | 2                             | 1                         | 4                     | 4                            | 0                                 |
| egressgateway    | 4                     | 4                            | 0                                 | 2                             | 1                         | 4                     | 4                            | 0                                 |
| nsselection      | 4                     | 2                            | 0                                 | 2                             | 1                         | 4                     | 2                            | 0                                 |
| nsavailability   | 4                     | 2                            | 0                                 | 2                             | 1                         | 4                     | 2                            | 0                                 |
| nsconfig         | 2                     | 2                            | 0                                 | 1                             | 1                         | 2                     | 2                            | 0                                 |
| nssubscription   | 2                     | 2                            | 0                                 | 1                             | 1                         | 2                     | 2                            | 0                                 |

Table 3-13 (Cont.) Resource Details

| Microservice                                              | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | CPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|-----------------------------------------------------------|-----------------------|------------------------------|-----------------------------------|-------------------------------|---------------------------|-----------------------|------------------------------|-----------------------------------|
| nrf-client-discovery                                      | 1                     | 1                            | 0                                 | 2                             | 1                         | 1                     | 1                            | 0                                 |
| nrf-client-management                                     | 1                     | 1                            | 0                                 | 1                             | 1                         | 1                     | 1                            | 0                                 |
| appinfo                                                   | 0.2                   | 1                            | 0                                 | 2                             | 1                         | 0.2                   | 1                            | 0                                 |
| perinfo                                                   | 0.2                   | 0.5                          | 0                                 | 1                             | 1                         | 0.2                   | 0.5                          | 0                                 |
| config-server                                             | 0.2                   | 0.5                          | 0                                 | 1                             | 1                         | 0.2                   | 0.5                          | 0                                 |
| <b>NSSF SUT Totals</b>                                    |                       |                              |                                   |                               |                           | <b>22.6 CPU</b>       | <b>20 GB</b>                 | <b>0</b>                          |
| <b>ATS</b>                                                |                       |                              |                                   |                               |                           |                       |                              |                                   |
| ATS Behave                                                | 2                     | 2                            | 0                                 | 0                             | 1                         | 2                     | 2                            | 0                                 |
| ATS AMF Stub (Python)                                     | 2                     | 2                            | 0                                 | 0                             | 1                         | 2                     | 2                            | 0                                 |
| ATS NRF Stub (Python)                                     | 1                     | 1                            | 0                                 | 0                             | 1                         | 2                     | 2                            | 0                                 |
| <b>ATS Totals</b>                                         |                       |                              |                                   |                               |                           | <b>4</b>              | <b>3</b>                     | <b>0</b>                          |
| <b>cnDBTier Pods (minimum of 4 worker nodes required)</b> |                       |                              |                                   |                               |                           |                       |                              |                                   |
| virt-launcher-dt-1.cluster.local                          | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |
| virt-launcher-dt-2.cluster.local                          | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |
| virt-launcher-dt-3.cluster.local                          | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |
| virt-launcher-dt-4.cluster.local                          | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |
| virt-launcher-mt-1.cluster.local                          | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |
| virt-launcher-mt-2.cluster.local                          | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |

Table 3-13 (Cont.) Resource Details

| Microservice                             | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | CPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|------------------------------------------|-----------------------|------------------------------|-----------------------------------|-------------------------------|---------------------------|-----------------------|------------------------------|-----------------------------------|
| virt-launcher-mt-3.cluster.local         | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |
| virt-launcher-sq-1.cluster.local         | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |
| virt-launcher-sq-2.cluster.local         | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |
| virt-launcher-db-installer.cluster.local | 4                     | 4                            | 2                                 | 2                             | 1                         | 4                     | 4                            | 2                                 |
| <b>cnDBTier Totals</b>                   |                       |                              |                                   |                               |                           | <b>40</b>             | <b>40</b>                    | <b>20</b>                         |

### 3.4.2 Locating and Downloading ATS and Simulator Images

To locate and download the ATS Image from MOS:

1. Log in to [My Oracle Support](#) using the appropriate credentials.
2. Select the **Patches and Updates** tab.
3. In the **Patch Search** window, click **Product or Family (Advanced)**.
4. Enter *Oracle Communications Cloud Native Core - 5G* in the **Product** field.
5. Select *Oracle Communications Cloud Native Core Network Slice Selection Function <release\_number>* from **Release** drop-down.
6. Click **Search**. The **Patch Advanced Search Results** list appears.
7. Select the required ATS patch from the search results. The Patch Details window appears.
8. Click **Download**. The File Download window appears.
9. Click the **<p>\*\*\*\*\*<release\_number>\_Tekelec>.zip** file to download the NSSF ATS package file.
10. Untar the zip file to get *ocats-nssf* directory, which consists of all the ATS Images. The *ocats-nssf* directory has the following files:

**Note****Prerequisites:**

- NSSF ATS release should be "ocats".
- To run oauth test cases for NSSF, oauth secrets needs to be generated. For more information, see "Configuring Secrets to Enable Access Token " section in *Oracle communications Cloud Native Core, Network Slice Selection Function Installation, Upgrade, Fault Recovery Guide*.
- NSSF needs to point to NRF and Stub Servers.

The required changes in NSSF custom-values.yaml file are mentioned below

```
ocats-nssf
├── ocats-nssf-24.2.0.0.0-mcafee.log
├── ocats-nssf-custom-configtemplates-24.2.0.0.0-README.txt  file
contains all the information required for the package.
├── ocats-nssf-custom-configtemplates-24.2.0.0.0.zip  contains
serviceaccount,PVC File and Custom values file
├── ocats-nssf-tools-pkg-24.2.0.0.0-README.txt          file contains all the
information required for the package.
└── ocats-nssf-tools-pkg-24.2.0.0.0.tgz                file has the following
images and charts packaged as tar files
```

**11.** Untar the ocats-nssf-tools-pkg-24.2.0.0.0.tgz tar file

The structure of the file looks as given below:

```
ocats-nssf-tools-pkg-24.2.0.0.0
├── amfstub-24.2.0.tar          -AMF Stub Server Docker image
├── amfstub-24.2.0.tar.sha256
├── ats_data-24.2.0.tar        - ATS data, After untar "ocnssf_tests"
folder will gets created in which ATS feature files present
├── ats_data-24.2.0.tar.sha256
├── ocats-nssf-24.2.0.tar      - NSSF ATS Docker Image
├── ocats-nssf-24.2.0.tar.sha256
├── ocats-nssf-24.2.0.tgz      - ATS Helm Charts, after untar "ocats-
nssf" ats charts folder gets created.
├── ocats-nssf-24.2.0.tgz.sha256
└── README.md
```

**12.** Copy the ocats-nssf-tools-pkg-24.2.0.0.0.tgz tar file to the CNE or Kubernetes cluster where you want to deploy ATS.

**13.** Along with the above packages, there is ocats-nssf-custom-configtemplates-24.2.0.0.0.zip at the same location. The readme file ocats-nssf-custom-configtemplates-24.2.0.0.0-README.txt contains information about the content of this zip file.

Content of ocats-nssf-custom-configtemplates-24.2.0.0.0.zip is as below:

```
nssf_ats_pvc_.yaml          - NSSF ATS PVC file
```

```

ocats_nssf_custom_values_.yaml          - NSSF ATS custom values file
which needs to be used while installing ATS
ocats_ocnssf_custom_serviceaccount_.yaml- Template to Create ATS service
account

```

Copy these files to OCCNE or Kubernetes cluster where you want to deploy ATS.

```

ocats-nssf-custom-configtemplates-24.2.0.0.0.zip
-----nssf_ats_pvc_.yaml                - NSSF ATS PVC file
-----ocats_nssf_custom_values_.yaml    - NSSF ATS custom values file
which needs to be used while installing ATS
-----ocats_ocnssf_custom_serviceaccount_.yaml- Template to Create ATS
service account

```

```

ocats-nssf-tools-pkg-24.2.0.0.0
├── amfstub-24.2.0.tar.                -AMF Stub Server Docker image
├── ats_data-24.2.0.tar.                - ATS data, After untar "ocnssf_tests"
folder will gets created in which ATS feature files present
├── ocats-nssf-24.2.0.tar.              - NSSF ATS Docker Image
├── ocats-nssf-24.2.0.tgz.              - ATS Helm Charts, after untar "ocats-
nssf" ats charts folder gets created.

```

### 3.4.3 Deploying ATS in Kubernetes Cluster

To deploy ATS in Kubernetes Cluster:

1. Verify checksums of the tarballs mentioned in the file Readme.txt.
2. Run the following commands to extract tar file content, Helm charts, and Docker images of ATS:

```
tar -xvzf ocats-nssf-tools-pkg-24.2.0.0.0.tgz
```

The output of this command will return the following files:

```

amfstub-24.2.0.tar
amfstub-24.2.0.tar.sha256
ats_data-24.2.0.tar
ats_data-24.2.0.tar.sha256
ocats-nssf-24.2.0.tar
ocats-nssf-24.2.0.tar.sha256
ocats-nssf-24.2.0.tgz
ocats-nssf-24.2.0.tgz.sha256
Readme.txt

```

3. **NSSF-ATS and Stub Images Load and Push:** Run the following commands in your cluster to load the ocats image and amf stubserver image:

**Docker Commands:**

```
docker load -i ocats-nssf-<version>.tar
```

```
docker load -i amfstub-<version>.tar
```

Examples:

```
docker load -i ocats-nssf-24.2.0.tar
```

```
docker load -i amfstub-24.2.0.tar
```

**Podman Commands:**

```
podman load -i ocats-nssf-<version>.tar
```

```
podman load -i amfstub-<version>.tar
```

Examples:

```
podman load -i ocats-nssf-24.2.0.tar
```

```
podman load -i amfstub-24.2.0.tar
```

4. Run the following commands to tag and push the ATS image registry.

- a. Run the following commands to grep the image:

```
docker images | grep ocats-nssf
```

```
docker images | grep amfstub
```

- b. Copy the Image ID from the output of the grep command and change the tag (version number) to your registry.

**Docker Commands:**

```
docker tag <Image_ID> <your-registry-name/ocats-nssf:<tag>>
```

```
docker push <your-registry-name/ocats-nssf:<tag>>
```

```
docker tag <Image_ID> <your-registry-name/amfstub:<tag>>
```

```
docker push <your-registry-name/amfstub:<tag>>
```

**Podman Commands:**

```
podman tag <Image_ID> <your-registry-name/ats/ocats-nssf:<tag>>
```

```
podman push <your-registry-name/ocats-nssf:<tag>>
```

```
podman tag <Image_ID> <your-registry-name/amfstub:<tag>>
```

```
podman push <your-registry-name/amfstub:<tag>>
```

5. **ATS Helm Charts** : Run the following command to get "ATS" Helm charts as shown below:

```
tar -xvzf ocats-nssf-24.2.0.tgz
```

The above command creates "ocats-nssf" helm charts of ATS.

6. **ATS Data**: Run the following command to get ATS data, which contains feature files and data:

```
tar -xvf ats_data-24.2.0.tar
```

The above command creates "ocnssf\_tests" ATS feature files data, which needs to be copied inside after the ATS installation is complete.

7. <Optional> Go to certificate folder inside ocats-nssf and run the following command:

```
kubectl create secret generic ocnssf-secret --from-file=certificates/rsa_private_key_pkcs1.pem --from-file=certificates/trust.txt --from-file=certificates/key.txt --from-file=certificates/ocnssf.cer --from-file=certificates/caroot.cer -n ocnssf
```

8. **ATS Custom Values File Changes**: Update the image name and tag in the ocats\_nssf\_custom\_values\_.yaml file as required.
- For this, open the ocats\_nssf\_custom\_values\_.yaml file
  - Update the image.repository and image.tag parameters for ocats-nssf, ocats-amf, and ocats-nrf.
  - Save and close the file after making the updates.
9. <Optional> **To enable static port**:

**Note**

ATS supports static port. By default, this feature is not available. In the ocats-nssf/values.yaml file under service section, set the value of staticNodePortEnabled parameter as 'true' and provide a valid nodePort value for staticNodePort.

- 10. ATS Service Account Creation:** In `ocats-nssf-custom-serviceaccount_.yaml`, change namespace as below:

```
sed -i "s/changeme-ocats/${namespace}/g"
ocats_ocnssf_custom_serviceaccount_.yaml
```

- 11.** Run the following command to apply `ocats-nssf-custom-serviceaccount_.yaml` file:
- ```
kubectl apply -f <serviceaccount.yaml file> -n <namespace_name>
```

**For example:**

```
kubectl apply -f ocats-nssf-custom-serviceaccount_.yaml -n ocnssf
```

- 12. ATS Helm Release Name Update:** If NSSF ATS helm release name is changed from "ocats" to any other value while installing ATS, that needs to be updated in NSSF custom-values.yaml file. Here is a NSSF custom-values.yaml file snippet where ATS helm release name is "ocats":

```
#Static virtual FQDN Config
staticVirtualFqdns:
  - name: https://abc.test.com
    alternateFqdns:
      - target: ocats-amf-stubserver.changeme-ocats
        port: 8080
        priority: 10
      - target: ocats-amf-stubserver.changeme-ocats
        port: 8080
        priority: 20
  - name: http://xyz.test.com
    alternateFqdns:
      - target: ocats-amf-stubserver.changeme-ocats
        port: 8080
        priority: 10
      - target: ocats-amf-stubserver.changeme-ocats
        port: 8080
        priority: 20

nrf-client:
  # This config map is for providing inputs to NRF-Client
  configmapApplicationConfig:
    &configRef
    # Config-map to provide inputs to Nrf-Client
    # primaryNrfApiRoot - Primary NRF Hostname and Port
    # SecondaryNrfApiRoot - Secondary NRF Hostname and Port
    # retryAfterTime - Default downtime(in Duration) of an NRF detected
    to be unavailable.
    # nrfClientType - The NfType of the NF registering
    # nrfClientSubscribeTypes - the NfType for which the NF wants to
    subscribe to the NRF.
    # appProfiles - The NfProfile of the NF to be registered with NRF.
    # enableF3 - Support for 29.510 Release 15.3
    # enableF5 - Support for 29.510 Release 15.5
    # renewalTimeBeforeExpiry - Time Period(seconds) before the
    Subscription Validity time expires.
    # validityTime - The default validity time(days) for subscriptions.
    # enableSubscriptionAutoRenewal - Enable Renewal of Subscriptions
    automatically.
```



```

# acceptAdditionalAttributes - Enable additionalAttributes as part
of 29.510 Release 15.5
# retryForCongestion - The duration(seconds) after which nrf-client
should retry to a NRF server found to be congested.
profile: |-
  [appcfg]
  primaryNrfApiRoot=ocats-nrf-stubserver.changeme-ocats:8080
  secondaryNrfApiRoot=ocats-nrf-stubserver.changeme-ocats:8080
  nrfScheme=http

```

sbiRouting:

```

sbiRoutingDefaultScheme: http
peerConfiguration:
- id: peer1
  host: ocats-amf-stubserver.changeme-ocats
  port: 8080
  apiPrefix: "/"
  healthApiPath: "/health/v1"
- id: peer2
  host: ocats-amf-stubserver.changeme-ocats
  port: 8080
  apiPrefix: "/"
  healthApiPath: "/health/v2"
- id: peer3
  host: ocats-nrf-stubserver.changeme-ocats
  port: 8080
  apiPrefix: "/"
  healthApiPath: "/health/v3"

```

In above snippet, ATS Helm release name is "ocats". For example, if ATS helm release name is changed from "ocats" to "ocatsnssf" while installing, NSSF custom-values.yaml file should be updated as below snippet:

```

#Static virtual FQDN Config
staticVirtualFqdns:
- name: https://abc.test.com
  alternateFqdns:
    - target:ocatsnssf-amf-stubserver.changeme-ocats
      port: 8080
      priority: 10
    - target:ocatsnssf-amf-stubserver.changeme-ocats
      port: 8080
      priority: 20
- name: http://xyz.test.com
  alternateFqdns:
    - target:ocatsnssf-amf-stubserver.changeme-ocats
      port: 8080
      priority: 10
    - target:ocatsnssf-amf-stubserver.changeme-ocats
      port: 8080
      priority: 20

```

nrf-client:

```

# This config map is for providing inputs to NRF-Client
configmapApplicationConfig:
  &configRef
  # Config-map to provide inputs to Nrf-Client
  # primaryNrfApiRoot - Primary NRF Hostname and Port
  # SecondaryNrfApiRoot - Secondary NRF Hostname and Port
  # retryAfterTime - Default downtime(in Duration) of an NRF detected
to be unavailable.
  # nrfClientType - The NfType of the NF registering
  # nrfClientSubscribeTypes - the NfType for which the NF wants to
subscribe to the NRF.
  # appProfiles - The NfProfile of the NF to be registered with NRF.
  # enableF3 - Support for 29.510 Release 15.3
  # enableF5 - Support for 29.510 Release 15.5
  # renewalTimeBeforeExpiry - Time Period(seconds) before the
Subscription Validity time expires.
  # validityTime - The default validity time(days) for subscriptions.
  # enableSubscriptionAutoRenewal - Enable Renewal of Subscriptions
automatically.
  # acceptAdditionalAttributes - Enable additionalAttributes as part
of 29.510 Release 15.5
  # retryForCongestion - The duration(seconds) after which nrf-client
should retry to a NRF server found to be congested.
  profile: |-
    [appcfg]
    primaryNrfApiRoot=ocatsnssf-nrf-stubserver.changeme-ocats:8080
    secondaryNrfApiRoot=ocatsnssf-nrf-stubserver.changeme-ocats:8080
    nrfScheme=http

sbiRouting:

sbiRoutingDefaultScheme: http
peerConfiguration:
  - id: peer1
    host:ocatsnssf-amf-stubserver.changeme-ocats
    port: 8080
    apiPrefix: "/"
    healthApiPath: "/health/v1"
  - id: peer2
    host:ocatsnssf-amf-stubserver.changeme-ocats
    port: 8080
    apiPrefix: "/"
    healthApiPath: "/health/v2"
  - id: peer3
    host:ocatsnssf-nrf-stubserver.changeme-ocats
    port: 8080
    apiPrefix: "/"
    healthApiPath: "/health/v3"

```

- 13. Pointing NSSF to Stub Servers:** Follow this step to point out NSSF to NRF-Stubserver and AMF-Stubserver in NSSF custom values file:

```
sed -i "s/changeme-ocats/${namespace}/g" $NSSF_CUSTOM_DEPLOY_FILE
```

For example:

```
sed -i "s/changeme-ocats/${namespace}/g" ocnsf_custom_values_24.2.0.yaml
```

The NSSF custom values snippet is as follows:

```
nrf-client:
  # This config map is for providing inputs to NRF-Client
  configmapApplicationConfig:
    &configRef
    # primaryNrfApiRoot - Primary NRF Hostname and Port
    # SecondaryNrfApiRoot - Secondary NRF Hostname and Port
    profile: |-
      [appcfg]
      primaryNrfApiRoot=ocats-nrf-stubserver.changeme-ocats:8080
      secondaryNrfApiRoot=ocats-nrf-stubserver.changeme-ocats:8080

staticVirtualFqdns:
  - name: https://abc.test.com
    alternateFqdns:
      - target: ocats-amf-stubserver.changeme-ocats
        port: 8080
        priority: 10
      - target: ocats-amf-stubserver.changeme-ocats
        port: 8080
        priority: 20
  - name: http://xyz.test.com
    alternateFqdns:
      - target: ocats-amf-stubserver.changeme-ocats
        port: 8080
        priority: 10
      - target: ocats-amf-stubserver.changeme-ocats
        port: 8080
        priority: 20
```

14. Deploy ATS as shown below. NSSF ATS Helm release name should be "ocats".  
`helm install <release_name> <charts> -n <namespace_name> -f <custom_values file> --version <helm-chart-version>`

**For example:**

```
helm install ocats ocats-nssf -n ocnsf -f
ocats_nssf_custom_values_24.2.0.yaml --version 24.2.0
```

Running the above command creates the following three pods:

```
ocats-amf-stubserver
ocats-nrf-stubserver
ocats-nssf
```

15. Run the following command to verify the ATS deployment:  
`helm status <release_name>`

The following screenshot is an example of a successful ATS deployment, where STATUS:DEPLOYED is an indicator of the same.

```
[opc@ocnssf-oci-phx-einstein-bastion-01 ~]$ helm status ocats
```

```
NAME: ocats
LAST DEPLOYED: Thu May 30 10:21:40 2024
NAMESPACE: cicdnssf-240530102024
STATUS: deployed
REVISION: 1
TEST SUITE: None
```

## 3.5 Installing ATS for Policy

Installing ATS for Policy procedure consists of the following two steps:

1. Locating and downloading the ATS package
2. Deploying ATS and stub pods in Kubernetes cluster

This includes installation of nine stubs (nf1stub, nf11stub, nf12stub, nf2stub, nf21stub, nf22stub, nf3stub, nf31stub, nf32stub), ocamf stub, ocdns-bind stub, ocldap-stub, and Policy ATS in the namespace where CNC Policy is deployed.

### 3.5.1 Resource Requirements

This section describes the ATS resource requirements for CNC Policy.

#### Overview - Total Number of Resources

The following table describes the overall resource usage in terms of CPUs, and memory for the following:

- PCF SUT
- cnDBTier
- ATS

**Table 3-14 PCF - Total Number of Resources**

| Resource Name       | Non-ASM CPU | Non-ASM Memory (GB) | ASM CPU | ASM Memory (GB) |
|---------------------|-------------|---------------------|---------|-----------------|
| PCF SUT Total       | 219         | 197                 | 293     | 244             |
| ATS Total           | 26          | 28                  | 54      | 42              |
| CnDBTier Total      | 107.1       | 175.2               | 137.1   | 190.2           |
| Grand Total PCF ATS | 352.1       | 400.2               | 484.1   | 476.2           |

#### PCF Pods Resource Requirements Details

This section describes the resource requirements, which are needed to deploy Policy ATS successfully.

**Table 3-15 PCF Pods Resource Requirements Details**

| Policy Microservices | Max CPU | Memory (GB) | Max Replica | Non-ASM Total CPU | Non-ASM Memory (GB) | ASM Total CPU | ASM Total Memory (GB) | Isito ASM CPU | Isito ASM Memory (GB) |
|----------------------|---------|-------------|-------------|-------------------|---------------------|---------------|-----------------------|---------------|-----------------------|
| oc-app-info          | 2       | 2           | 1           | 2                 | 2                   | 4             | 3                     | 2             | 1                     |
| oc-bulwark           | 8       | 6           | 2           | 16                | 12                  | 20            | 14                    | 2             | 1                     |
| oc-diam-connector    | 4       | 2           | 2           | 8                 | 4                   | 12            | 6                     | 2             | 1                     |
| oc-diam-gateway      | 4       | 2           | 1           | 4                 | 2                   | 6             | 3                     | 2             | 1                     |
| alternate-route      | 2       | 4           | 1           | 2                 | 4                   | 4             | 5                     | 2             | 1                     |
| oc-config-server     | 4       | 2           | 1           | 4                 | 2                   | 6             | 3                     | 2             | 1                     |
| ocegress_gateway     | 4       | 6           | 1           | 4                 | 6                   | 6             | 7                     | 2             | 1                     |
| ocingress_gateway    | 5       | 6           | 1           | 5                 | 6                   | 7             | 7                     | 2             | 1                     |
| nrf-client-disc      | 4       | 2           | 2           | 8                 | 4                   | 12            | 6                     | 2             | 1                     |
| nrf-client-mngt      | 1       | 1           | 2           | 2                 | 2                   | 6             | 4                     | 2             | 1                     |
| oc-audit             | 2       | 4           | 1           | 2                 | 4                   | 4             | 5                     | 2             | 1                     |
| oc-config-mgmt       | 4       | 2           | 2           | 8                 | 4                   | 12            | 6                     | 2             | 1                     |
| oc-ldap-gateway      | 4       | 2           | 2           | 8                 | 8                   | 12            | 10                    | 2             | 1                     |
| oc-policy-ds         | 7       | 8           | 2           | 14                | 16                  | 18            | 18                    | 2             | 1                     |
| oc-pre               | 4       | 4           | 2           | 8                 | 8                   | 12            | 10                    | 2             | 1                     |
| oc-query             | 2       | 1           | 2           | 4                 | 2                   | 8             | 4                     | 2             | 1                     |
| oc-soap-connector    | 4       | 4           | 2           | 8                 | 8                   | 12            | 10                    | 2             | 1                     |
| oc-pcf-am            | 8       | 8           | 2           | 16                | 16                  | 20            | 18                    | 2             | 1                     |
| oc-pcf-sm            | 7       | 10          | 2           | 14                | 20                  | 18            | 22                    | 2             | 1                     |
| oc-pcf-ue            | 8       | 6           | 2           | 16                | 12                  | 20            | 24                    | 2             | 1                     |
| oc-pcrf-core         | 8       | 8           | 2           | 16                | 16                  | 0             | 18                    | 2             | 1                     |

**Table 3-15 (Cont.) PCF Pods Resource Requirements Details**

| Policy Microservices | Max CPU | Memory (GB) | Max Replica | Non-ASM Total CPU | Non-ASM Memory (GB) | ASM Total CPU | ASM Total Memory (GB) | Isito ASM CPU | Isito ASM Memory (GB) |
|----------------------|---------|-------------|-------------|-------------------|---------------------|---------------|-----------------------|---------------|-----------------------|
| oc-perf-info         | 2       | 2           | 2           | 4                 | 4                   | 8             | 6                     | 2             | 1                     |
| oc-binding           | 6       | 8           | 1           | 6                 | 8                   | 8             | 9                     | 2             | 1                     |
| oc-udr-connect or    | 6       | 4           | 2           | 12                | 8                   | 16            | 10                    | 2             | 1                     |
| oc-chf-connect or    | 6       | 4           | 2           | 12                | 8                   | 16            | 10                    | 2             | 1                     |
| usage-mon            | 5       | 4           | 2           | 10                | 8                   | 14            | 10                    | 2             | 1                     |
| nwdaf-agent          | 2       | 1           | 1           | 2                 | 1                   | 4             | 2                     | 2             | 1                     |
| notifier             | 2       | 1           | 2           | 4                 | 2                   | 8             | 4                     | 2             | 1                     |
| Policy Totals        |         |             |             | 219               | 197                 | 293           | 244                   |               |                       |

**ATS Resource Requirements details for Policy**

This section describes the ATS resource requirements, which are needed to deploy Policy ATS successfully.

**Table 3-16 ATS Resource Requirements Details**

| ATS Microservices | Max CPU | Max Memory (GB) | Max Replica | Non-ASM Total CPU | Non-ASM Total Memory (GB) | ASM Total CPU | ASM Total Memory (GB) | Isito ASM CPU | Isito ASM Memory (GB) |
|-------------------|---------|-----------------|-------------|-------------------|---------------------------|---------------|-----------------------|---------------|-----------------------|
| ocstub1-py        | 2       | 2               | 1           | 2                 | 2                         | 4             | 3                     | 2             | 1                     |
| ocstub2-py        | 2       | 2               | 1           | 2                 | 2                         | 4             | 3                     | 2             | 1                     |
| ocstub3-py        | 2       | 2               | 1           | 2                 | 2                         | 4             | 3                     | 2             | 1                     |
| ocstub1 1-py      | 2       | 2               | 1           | 2                 | 2                         | 4             | 3                     | 2             | 1                     |
| ocstub1 2-py      | 2       | 2               | 1           | 2                 | 2                         | 4             | 3                     | 2             | 1                     |
| ocstub2 1-py      | 2       | 2               | 1           | 2                 | 2                         | 4             | 3                     | 2             | 1                     |
| ocstub2 2-py      | 2       | 2               | 1           | 2                 | 2                         | 4             | 3                     | 2             | 1                     |
| ocstub3 1-py      | 2       | 2               | 1           | 2                 | 2                         | 4             | 3                     | 2             | 1                     |
| ocstub3 2-py      | 2       | 2               | 1           | 2                 | 2                         | 4             | 3                     | 2             | 1                     |

**Table 3-16 (Cont.) ATS Resource Requirements Details**

| ATS Microservices | Max CPU | Max Memory (GB) | Max Replica | Non-ASM Total CPU | Non-ASM Total Memory (GB) | ASM Total CPU | ASM Total Memory (GB) | Isito ASM CPU | Isito ASM Memory (GB) |
|-------------------|---------|-----------------|-------------|-------------------|---------------------------|---------------|-----------------------|---------------|-----------------------|
| ocamf-stub        | 1       | 1               | 1           | 1                 | 1                         | 3             | 2                     | 2             | 1                     |
| ocats-policy      | 4       | 6               | 1           | 4                 | 6                         | 6             | 7                     | 2             | 1                     |
| ocdns-bind        | 1       | 1               | 1           | 1                 | 1                         | 3             | 2                     | 2             | 1                     |
| oc-ldap-org1      | 1       | 1               | 1           | 1                 | 1                         | 3             | 2                     | 2             | 1                     |
| ocdiam-sim        | 1       | 1               | 1           | 1                 | 1                         | 3             | 2                     | 2             | 1                     |
| ATS Totals        |         |                 |             | 26                | 28                        | 54            | 42                    |               |                       |

**cnDBTier Resource Requirements Details for Policy ATS**

This section describes the cnDBTier resource requirements, which are needed to deploy Policy ATS successfully.

**Note**

For cnDBTier pods, a minimum of 4 worker nodes are required.

**Table 3-17 cnDBTier Resource Requirements Details**

| cnDBTier Microservices | Min CPU | Min Memory (GB) | Min Replica | Total CPU | Total Memory (GB) | ASM Total CPU | ASM Total Memory (GB) | Isito ASM CPU | Isito ASM Memory (GB) |
|------------------------|---------|-----------------|-------------|-----------|-------------------|---------------|-----------------------|---------------|-----------------------|
| db_monitor_svc         | 1       | 1               | 1           | 1         | 1                 | 3             | 2                     | 2             | 1                     |
| db_replication_svc     | 2       | 12              | 1           | 2         | 12                | 4             | 13                    | 2             | 1                     |
| db_backup_manager_svc  | 0.1     | 0.2             | 1           | 0.1       | 0.2               | 2.1           | 1.2                   | 2             | 1                     |
| ndbappmysqld           | 8       | 10              | 4           | 32        | 40                | 40            | 44                    | 2             | 1                     |
| ndbmgmmd               | 4       | 10              | 2           | 8         | 20                | 12            | 22                    | 2             | 1                     |
| ndbmttd                | 10      | 18              | 4           | 40        | 72                | 48            | 76                    | 2             | 1                     |
| ndbmysqld              | 8       | 10              | 2           | 16        | 20                | 20            | 22                    | 2             | 1                     |

**Table 3-17 (Cont.) cnDBTier Resource Requirements Details**

| cnDBTier<br>Microservices      | Min<br>CPU | Min<br>Memory<br>(GB) | Min<br>Replica | Total<br>CPU | Total<br>Memory<br>(GB) | ASM<br>Total<br>CPU | ASM<br>Total<br>Memory<br>(GB) | Isito<br>ASM<br>CPU | Isito<br>ASM<br>Memory<br>(GB) |
|--------------------------------|------------|-----------------------|----------------|--------------|-------------------------|---------------------|--------------------------------|---------------------|--------------------------------|
| db_infra_<br>_moditor_<br>_svc | 8          | 10                    | 1              | 8            | 10                      | 8                   | 10                             |                     |                                |
| DB Tier Total                  |            |                       |                | 107.1        | 175.2                   | 137.1               | 190.2                          |                     |                                |

**Note**

The requirements shown in the above table for CnDBTier are the default numbers and must be changed as per the deployment requirements.

## 3.5.2 Downloading the ATS Package

This section provides information on how to locate and download the Policy ATS package file from My Oracle Support (MOS).

### Locating and Downloading Policy ATS Package

To locate and download the ATS package from MOS, perform the following steps:

1. Log in to [My Oracle Support](#) using the valid credentials.
2. Select the **Patches & Updates** tab.
3. In the **Patch Search** window, click **Product or Family (Advanced)**.
4. Enter Oracle Communications Cloud Native Core - 5G in the **Product** field.
5. Select Oracle Communications Cloud Native Core Policy <release\_number> using the drop-down menu of the **Release** field.
6. Click **Search**. The list of **Patch Advanced Search Results** appears.
7. Select the required ATS patch from the list. The Patch Details window appears.
8. Click **Download**. The File Download window appears.
9. Click the <p\*\*\*\*\*>\_<release\_number>\_Tekelec>.zip file to download the CNC Policy ATS package file.
10. Untar the gzip file ocats-policy-tools-24.2.7.0.0.tgz to access the following files:

```
ocats-policy-pkg-24.2.7.0.0.tgz
ocdns-pkg-24.2.17.0.0.tgz
ocamf-pkg-24.2.17.0.0.tgz
oc-ldap-org1-pkg-24.2.17.0.0.tgz
ocstub-pkg-24.2.6.0.0.tgz
ocdiam-pkg-24.2.17.0.0.tgz
```



The contents included in each of these files are as follow:

```
|
|_ _ _ocats-policy-pkg-24.2.7.0.0.tgz
|     |_ _ _ _ _ ocats-policy-24.2.7.tgz (Helm Charts)
|     |_ _ _ _ _ ocats-policy-image-24.2.7.tar (Docker Images)
|     |_ _ _ _ _ ocats-policy-data-24.2.7.tgz (Policy ATS and Jenkins
job Data)
|
|_ _ _ocstub-pkg-24.2.6.0.0.tgz
|     |_ _ _ _ _ ocstub-py-24.2.6.tgz(Helm Charts)
|     |_ _ _ _ _ ocstub-py-image-24.2.6.tar (Docker Images)
|
|_ _ _ocdns-pkg-24.2.17.0.0.tgz
|     |_ _ _ _ _ ocdns-bind-24.2.17.tgz(Helm Charts)
|     |_ _ _ _ _ ocdns-bind-image-24.2.17.tar (Docker Images)
|
|_ _ _ocamf-pkg-24.2.17.0.0.tgz
|     |_ _ _ _ _ ocamf-stub-24.2.17.tgz(Helm Charts)
|     |_ _ _ _ _ ocamf-stub-image-24.2.17.tar (Docker Images)
|
|_ _ _oc-ldap-org1-pkg-24.2.17.0.0.tgz
|     |_ _ _ _ _ oc-ldap-org1-24.2.17.tgz(Helm Charts)
|     |_ _ _ _ _ oc-ldap-org1-image-24.2.17.tar (Docker Images)
|
|_ _ _ocdiam-pkg-24.2.17.0.0.tgz
|     |_ _ _ _ _ ocdiam-sim-24.2.17.tgz(Helm Charts)
|     |_ _ _ _ _ ocdiam-sim-image-24.2.17.tar (Docker Images)
```

11. Copy the tar file from the downloaded package to OCCNE, OCI, or Kubernetes cluster where you want to deploy ATS.

### 3.5.3 Pushing the Images to Customer Docker Registry

#### Preparing to deploy ATS and Stub Pods in Kubernetes Cluster

To deploy ATS and stub pods in Kubernetes Cluster, perform the following steps:

1. Run the following command to extract tar file content.  
`tar -zxvf ocats-policy-tools-24.2.7.0.0.tgz`

The following is the output of this command:

```
ocats-policy-pkg-24.2.7.0.0.tgz
ocstub-pkg-24.2.6.0.0.tgz
ocdns-pkg-24.2.17.0.0.tgz
ocamf-stub-24.2.17.0.0.tgz
oc-ldap-org1-24.2.17.tgz
ocdiam-pkg-24.2.17.0.0.tgz
```

2. Run the following command to extract the helm charts and docker images of Policy ATS:  
`tar -zxvf ocats-policy-pkg-24.2.7.0.0.tgz`

The following is the output:

```
ocats-policy-24.2.7.tgz
ocats-policy-images-24.2.7.tar
ocats-policy-data-24.2.7.tgz
```

3. Run the following command to load the ATS docker image:  
`docker load --input ocats-policy-images-24.2.7.tar`
4. Run the following commands to tag and push the ATS images:

```
docker tag ocats-policy:24.2.7 <registry>/ocats-policy:24.2.7
docker push <registry>/ocats-policy:24.2.7
```

#### Example:

```
docker tag ocats-policy:24.2.7 localhost:5000/ocats-policy:24.2.7
docker push localhost:5000/ocats-policy:24.2.7
```

#### Note

If you are using Podman instead of Docker, replace docker with podman in all the docker commands given in this document.

5. Run the following command to untar the helm charts – 24.2.7.  
`tar -zxvf ocats-policy-24.2.7.tgz`

**Note**

atsFeatures section is newly introduced in values.yaml which helps Engineering team to control feature deliveries over the releases. It is not advisable to update any of the following flags without Engineering team's permission.

```
atsFeatures: ## DO NOT UPDATE this section without Engineering
team's permission
  testCaseMapping: true           # To display Test cases on
GUI along with Features
  logging: true                   # To enable feature to
collect applogs in case of failure
  lightweightPerformance: false   # The Feature is not
implemented yet
  executionWithTagging: true       # To enable Feature/Scenario
execution with Tag
  scenarioSelection: false        # The Feature is not
implemented yet
  parallelTestCaseExecution: true  # To run ATS features parallel
parallelFrameworkChangesIntegrated: true # To run ATS features
parallel
  mergedExecution: false          # To execute ATS Regression
and NewFeatures pipelines together in merged manner
  individualStageGroupSelection: false # The Feature is not
implemented yet
  parameterization: true          # When set to false, the
Configuration_Type parameter on the GUI will not be available.
  atsApi: true                    # To trigger ATS using ATS API
  healthcheck: true               # TO enable/disable ATS
Health Check.
  atsGuiTLSEnabled: false         # To run ATS GUI in https
mode.
  atsCommunicationTLSEnabled: false #If set to true, ATS will get
necessary variables to communicate with SUT, Stub or other NFs with
TLS enabled. It is not required in ASM environment.
```

6. Update the registry name, image name and tag in the ocats-policy/values.yaml file as required. For this, you need to update the image.repository and image.tag parameters in the ocats-policy/values.yaml file.

## 3.5.4 Configuring ATS

### 3.5.4.1 Enabling Static Port

To enable static port, in the ocats-policy/values.yaml file under the service section, set the value of staticNodePortEnabled parameter to true and enter a valid nodePort value for staticNodePort parameter.

```
service:
  customExtension:
    labels: {}
```

```

    annotations: {}
    type: LoadBalancer
    ports:
      http:
        port: "8080"
        staticNodePortEnabled: false
        staticNodePort: ""

```

### 3.5.4.2 Enabling Static API Node Port

To enable static API node port, in the ocats-policy/values.yaml file under the service section, set the value of staticAPINodePortEnabled parameter to true and enter a valid nodePort value for staticAPINodePortEnabled parameter.

```

service:
  customExtension:
    labels: {}
    annotations: {}
  type: LoadBalancer
  ports:
    api:
      port: "5001"
      staticNodePortEnabled: false
      staticNodePort: ""

```

### 3.5.4.3 Service Account Requirements

To run Policy-ATS, use the following rules to create a service account:

```

rules:
- apiGroups: ["extensions"]
  resources: ["deployments", "replicasets", "statefulsets"]
  verbs: ["watch", "get", "list", "update"]
- apiGroups: ["apps"]
  resources: ["deployments", "replicasets", "statefulsets"]
  verbs: ["watch", "get", "list", "update"]
- apiGroups: [""]
  resources: ["pods", "services", "secrets", "configmaps"]
  verbs: ["watch", "get", "list", "delete", "update", "create"]
- apiGroups: [""]
  resources: ["pods/log"]
  verbs: ["get", "list"]

```

To run oc-ldap ATS, use the following rules to create a service account:

| PolicyRule:                            |                   |                    |       |
|----------------------------------------|-------------------|--------------------|-------|
| Resources                              | Non-Resource URLs | Resource Names     | Verbs |
| -----                                  | -----             | -----              | ----- |
| deployments.apps                       | []                | [rc1-oc-ldap-org1] | [get  |
| list watch create update patch delete] |                   |                    |       |
| deployments.extensions                 | []                | [rc1-oc-ldap-org1] | [get  |

```
list watch create update patch delete]
podsecuritypolicies.policy [] [1org1-rc1] [use]
```

#### ① Note

For information about creating service account, see the *Oracle Communications Cloud Native Core, Converged Policy Installation, Upgrade, and Fault Recovery Guide* available on MOS.

### 3.5.4.4 Enabling Aspen Service Mesh

This section provides information on how to enable Aspen service mesh while deploying ATS for CNC Policy. The configurations mentioned in this section are optional and should be performed only if ASM is required.

To enable service mesh for CNC Policy ATS, perform the following steps:

1. In the **service** section of the `values.yaml` file, the **serviceMeshCheck** parameter is set to `false` (default configuration). To enable service mesh, set the value for **serviceMeshCheck** to `true`. The following is a snippet of the service section in the yaml file:

```
service:
  customExtension:
    labels: {}
    annotations: {}
  type: LoadBalancer
  ports:
    https:
      port: "8443"
      staticNodePortEnabled: false
      staticNodePort: ""
    http:
      port: "8080"
      staticNodePortEnabled: false
      staticNodePort: ""
    api:
      port: "5001"
      staticNodePortEnabled: false
      staticNodePort: ""
  serviceMeshCheck: true
```

2. If the ASM is not enabled on the global level for the namespace, run the following command to enable it before deploying the ATS:

```
kubectl label --overwrite namespace <namespace_name> istio-
injection=enabled
```

For example:

```
kubectl label --overwrite namespace ocpf istio-injection=enabled
```

- Uncomment and add the following annotation under the **customExtension** section of the global section in values.yaml file and deploy the ATS Pods:

```
customExtension:
  allResources:
    labels: {}
    annotations: {
      #Enable this section for service-mesh based installation
      traffic.sidecar.istio.io/excludeInboundPorts: "9000",
      traffic.sidecar.istio.io/excludeOutboundPorts: "9000"
    }
```

After making this update in the values.yaml file, make sure that all the ATS and stub pods come up with istio container.

- For ServerHeader and SessionRetry features, the user needs to perform the following configurations under the envoyFilters for nf1stub, nf11stub, nf12stub, nf2stub, nf21stub, nf22stub, nf3stub, nf31stub, and nf32stub in the occnp-servicemesh-config-custom-values-24.2.7.yaml:

#### Note

occnp\_custom\_values\_servicemesh\_config yaml file and helm charts version names would differ based on the deployed Policy NF version. For example, "occnp\_custom\_values\_servicemesh\_config\_24.2.0.yaml" or "occnp\_custom\_values\_servicemesh\_config\_24.2.1.yaml".

```
envoyFilters:
  - name: serverheaderfilter-nf1stub
    labelselector: "app: nf1stub-ocstub-py"
    configpatch:
      - applyTo: NETWORK_FILTER
        filtername: envoy.filters.network.http_connection_manager
        operation: MERGE
        typeconfig: type.googleapis.com/
envoy.extensions.filters.network.http_connection_manager.v3.HttpConnectionM
anager
      configkey: server_header_transformation
      configvalue: PASS_THROUGH
  - name: serverheaderfilter-nf11stub
    labelselector: "app: nf11stub-ocstub-py"
    configpatch:
      - applyTo: NETWORK_FILTER
        filtername: envoy.filters.network.http_connection_manager
        operation: MERGE
        typeconfig: type.googleapis.com/
envoy.extensions.filters.network.http_connection_manager.v3.HttpConnectionM
anager
      configkey: server_header_transformation
      configvalue: PASS_THROUGH
  - name: serverheaderfilter-nf12stub
    labelselector: "app: nf12stub-ocstub-py"
    configpatch:
      - applyTo: NETWORK_FILTER
```

```

        filtername: envoy.filters.network.http_connection_manager
        operation: MERGE
        typeconfig: type.googleapis.com/
envoy.extensions.filters.network.http_connection_manager.v3.HttpConnectionM
anager
        configkey: server_header_transformation
        configvalue: PASS_THROUGH
    - name: serverheaderfilter-nf2stub
      labelselector: "app: nf2stub-ocstub-py"
      configpatch:
        - applyTo: NETWORK_FILTER
          filtername: envoy.filters.network.http_connection_manager
          operation: MERGE
          typeconfig: type.googleapis.com/
envoy.extensions.filters.network.http_connection_manager.v3.HttpConnectionM
anager
        configkey: server_header_transformation
        configvalue: PASS_THROUGH
    - name: serverheaderfilter-nf21stub
      labelselector: "app: nf21stub-ocstub-py"
      configpatch:
        - applyTo: NETWORK_FILTER
          filtername: envoy.filters.network.http_connection_manager
          operation: MERGE
          typeconfig: type.googleapis.com/
envoy.extensions.filters.network.http_connection_manager.v3.HttpConnectionM
anager
        configkey: server_header_transformation
        configvalue: PASS_THROUGH
    - name: serverheaderfilter-nf22stub
      labelselector: "app: nf22stub-ocstub-py"
      configpatch:
        - applyTo: NETWORK_FILTER
          filtername: envoy.filters.network.http_connection_manager
          operation: MERGE
          typeconfig: type.googleapis.com/
envoy.extensions.filters.network.http_connection_manager.v3.HttpConnectionM
anager
        configkey: server_header_transformation
        configvalue: PASS_THROUGH
    - name: serverheaderfilter-nf3stub
      labelselector: "app: nf3stub-ocstub-py"
      configpatch:
        - applyTo: NETWORK_FILTER
          filtername: envoy.filters.network.http_connection_manager
          operation: MERGE
          typeconfig: type.googleapis.com/
envoy.extensions.filters.network.http_connection_manager.v3.HttpConnectionM
anager
        configkey: server_header_transformation
        configvalue: PASS_THROUGH
    - name: serverheaderfilter-nf31stub
      labelselector: "app: nf31stub-ocstub-py"
      configpatch:
        - applyTo: NETWORK_FILTER
          filtername: envoy.filters.network.http_connection_manager

```

```

        operation: MERGE
        typeconfig: type.googleapis.com/
envoy.extensions.filters.network.http_connection_manager.v3.HttpConnectionM
anager
        configkey: server_header_transformation
        configvalue: PASS_THROUGH
    - name: serverheaderfilter-nf32stub
      labelselector: "app: nf32stub-ocstub-py"
      configpatch:
        - applyTo: NETWORK_FILTER
          filtername: envoy.filters.network.http_connection_manager
          operation: MERGE
          typeconfig: type.googleapis.com/
envoy.extensions.filters.network.http_connection_manager.v3.HttpConnectionM
anager
          configkey: server_header_transformation
          configvalue: PASS_THROUGH

```

5. Perform helm upgrade on the occnp-servicemesh-config release using the modified occnp-servicemesh-config-custom-values-24.2.7.yaml.

```

helm upgrade <helm_release_name_for_servicemesh> -n <namespace>
<servicemesh_charts> -f <servicemesh-custom.yaml>

```

Example

```

helm upgrade occnp-servicemesh-config occnp-servicemesh-config-24.2.7.tgz -
n <namespace> -f occnp-servicemesh-config-custom-values-24.2.7.yaml

```

6. Configure DNS for Alternate Route service. For more information, see [Post-Installation Steps](#).

### 3.5.4.5 Enabling Persistent Volume

#### ① Note

The steps provided in this section are optional and required only if Persistent Volume needs be to enabled.

ATS supports Persistent storage to retain ATS historical build execution data, test cases and one-time environment variable configurations. With this enhancement, the user can decide whether to use persistent volume based on their resource requirements. By default, the persistent volume feature is not enabled.

To enable persistent storage, perform the following steps:

1. Create a PVC and associate the same to the ATS pod.
  - a. Edit pvc.yaml file.
  - b. Set **PVClaimName** to the PVC created in Step 1.

deployment:



```

customExtension:
  labels: {}
  annotations: {}
PVEEnabled: true
PVClaimName: "ocpcf-pvc-24.2.7"

```

- c. Enter the **storageClassName** to the Storage Class Name.
- d. Set storage to and size of the persistent volume.  
Sample PVC:

```

apiVersion: v1
kind: PersistentVolumeClaim
metadata:
  name: policy-pvc-24.2.7  annotations:
spec:
  storageClassName: standard
  accessModes:
    - ReadWriteOnce
  resources:
    requests:
      storage: 1Gi

```

**Note**

It is recommended to suffix the pvc name with the release version to avoid confusion during the subsequent releases. For example, policy-pvc-24.2.7.

- e. Run the following command to create the PVC.

```
kubectl apply -f <filename> -n <namespace>
```

For example:

```
kubectl apply -f PersistentVolumeClaim.yaml -n ocpcf
```

- f. Once the PVC is created , run the following command to verify that it is bound to the persistent volume and is available.

```
kubectl get pvc -n <namespace used for pvc creation>
```

Sample output:

```

[cloud-user@platform-bastion-1 ocats-policy]$ kubectl get pvc -n ocpcf
NAME                STATUS  VOLUME                                     CAPACITY  ACCESS MODES  STORAGECLASS  AGE
policy-pvc-24.2.7   Bound   pvc-65484045-3805-4064-9fc3-f9eeeaccc8b8  1Gi       RWO           standard      11s

```

**Note**

Do not proceed further with the next step if there is an issue with the PV creation and contact your administrator to get the PV Created

2. Enable PVC.
  - a. Set the **PVEnabled** flag to **true**.
  - b. Set **PVClaimName** to the PVC created in Step 1.

```
PVEnabled: false  
PVClaimName: "policy-pvc-24.2.7"
```

**Note**

Make sure that ATS is deployed before proceeding to the further steps.

3. Copy the `<nf_main_folder>` and `<jenkins jobs>` folders from the tar file to their ATS pod and restart the pod.
  - a. Extract the tar file.

```
tar -xvf ocats-policy-data-24.2.7.tgz
```

- b. Run the following commands to copy the desired folder.

```
kubectl cp ocats-policy-data-24.2.7/ocpcf_tests <namespace>/<pod-name>:/var/lib/jenkins/
```

```
kubectl cp ocats-policy-data-24.2.7/jobs <namespace>/<pod-name>:/var/lib/jenkins/.jenkins/
```

- c. Restart the pod.

```
kubectl delete po <pod-name> -n <namespace>
```

4. Once the Pod is up and running, log in to the Jenkins console and configure the **Discard old Builds** option to configure the number of Jenkins builds, which must be retained in the persistent volume.

**Figure 3-9 Discarding Old Builds**
**Note**

If **Discard old Builds** is not configured, Persistent Volume can get filled when there are huge number of builds.

For more details on Persistent Volume Storage, see [Persistent Volume for 5G ATS](#).

### 3.5.4.6 Enabling Health Check

This section describes how to enable Health Check for ATS.

To enable Health Check, in the `ocats-policy/values.yaml` file, set the value of `healthcheck` parameter to `true` and enter a valid value to select the environment.

```
webscale: false
healthchecksecretname: "healthchecksecret"
occnehostip: ""
occnehostusername: ""
occnehostpassword: ""
envtype: ""
webscalejumpip: ""
webscalejumpusername: ""
webscalejumppassword: ""
webscaleprojectname: ""
webscalelabserverFQDN: ""
webscalelabserverport: ""
webscalelabserverusername: ""
webscalelabserverpassword: ""
```

To select OCCNE environment, update the values of the following two parameters:

- `webscale` - Update the value as `false`
- `envtype` - `T0NDTkU=` (i.e `envtype=$(echo -n 'OCCNE' | base64)`)
- `occnehostip` - OCCNE Host IP address
- `occnehostusername` - OCCNE Host Username
- `occnehostpassword` - OCCNE Host Password

The following is the sample configuration for OCCNE environment:

```
atsFeatures: ## DO NOT UPDATE this section without Engineering team's
permission
  healthcheck: true                # TO enable/disable ATS Health Check.

webscale: false
healthchecksecretname: "healthchecksecret"
occnehostip: "MTAuMTcuMjE5LjY1"
occnehostusername: "dXNlcm5hbWU="
occnehostpassword: "KioqKg=="
envtype: "T0NDTKU="
```

To select WEBSCALE environment, update the values of the following two parameters:

- webscale - Update the value as true
- envtype - V0VCU0NBTEU= (i.e envtype=\$(echo -n 'WEBSCALE' | base64))

After the configurations are done, encrypt below parameters and provide the values as shown in the following snippet:

The following is the sample configuration for WEBSCALE environment:

```
atsFeatures: ## DO NOT UPDATE this section without Engineering team's
permission
  healthcheck: true                # TO enable/disable ATS Health Check.

webscale: true
healthchecksecretname: "healthchecksecret"
occnehostip: ""
occnehostusername: ""
occnehostpassword: ""
envtype: "V0VCU0NBTEU="
webscalejumpip: "MTAuNzAuMTE3LjQy"
webscalejumpusername: "dXNlcm5hbWU="
webscalejumppassword: "KioqKg=="
webscaleprojectname: "KioqKg=="
webscalelabserverFQDN: "KioqKg=="
webscalelabserverport: "KioqKg=="
webscalelabserverusername: "KioqKg=="
webscalelabserverpassword: "KioqKg=="
```

#### Note

Once the ATS is deployed with HealthCheck feature enabled or disabled, then it cannot be changed. To change the configuration, you are required to re-install.

### 3.5.4.7 ATS-Policy API Extended Support

The ATS application programming interface (API) feature provides APIs, to perform routine ATS tasks such as starting the ATS suite, monitoring and stopping the ATS suite etc.

By default, this feature is enabled in `values.yaml` file.

```
atsFeatures:
  atsApi: true
```

For more details about the ATS API feature, refer to [ATS API](#) section.

This ATS feature is extended to provide the ability of running single features, or scenarios, or stages, or groups, or based on tags execution using the API. This also allows running of test cases by providing the features, or scenarios, or stages, or groups, or tags in the `curl` request to the server.

For more details about the API interfaces, refer to [Use the RESTful Interfaces](#) section.

## 3.5.5 Deploying ATS and Pods

### 3.5.5.1 Deploying ATS in Kubernetes Cluster

To deploy ATS, perform the following steps:

1. Run the following command using the updated helm charts.

#### Note

Ensure that all the components, ATS, go-Stub, dns-bind, ocamp, and CNC Policy are deployed in the same namespace.

**Using Helm** `helm install -name <release_name> ocats-policy-24.2.7.tgz --namespace <namespace_name> -f <values-yaml-file>`

**Example:** `helm install -name ocats ocats-policy-24.2.7.tgz --namespace ocpf -f ocats-policy/values.yaml`

2. Run the following command to verify ATS deployment:  
`helm ls -n ocpf`

The sample output is as follows:

| NAME     | REVISION            | UPDATED                      | STATUS |
|----------|---------------------|------------------------------|--------|
| CHART    | APP VERSION         | NAMESPACE                    |        |
| ocats    | 1                   | Mon November 6 14:56:11 2023 |        |
| DEPLOYED | ocats-policy-24.2.7 | 1.0                          | ocpcf  |

The status appears as **DEPLOYED** after the deployment is successful.

### 3.5.5.2 Deploying Stub Pod in Kubernetes Cluster

To deploy Stub Pod in Kubernetes cluster, perform the following steps:

1. Go to the `ocats-policy-tools-24.2.7.0.0` folder and run the following command to extract the `ocstub` tar file content.  
`tar -zxvf ocstub-pkg-24.2.6.0.0.tgz`

The output of this command is:

- ocstub-py-24.2.6.tgz
- ocstub-py-image-24.2.6.tar

#### ① Note

To deploy additional stubs required for session retry feature validation:

- nf11stub, nf12stub → Alternate FQDN for nf1stub
- nf21stub, nf22stub → Alternate FQDN for nf2stub
- nf31stub, nf32stub → Alternate FQDN for nf3stub

2. Run the following command in your cluster to load the STUB image.

```
docker load --input ocstub-py-image-24.2.6.tar
```

3. Run the following commands to tag and push the STUB image.

```
docker tag ocstub-py:24.2.6 <registry>/ocstub-py:24.2.6
docker push <registry>/ocstub-py:24.2.6
```

4. Run the following command to untar the helm charts, ocstub-py-24.2.6.tgz.

```
tar -zxvf ocstub-py-24.2.6.tgz
```

5. Update the registry name, image name and tag (if required) in the ocstub-py/values.yaml file as required. For this, open the **values.yaml** file and update the image.repository and image.tag parameters.

#### ① Note

From 24.2.0 onwards, service port names are configurable in ocstub-py. But as per Istio standard, it's advisable to keep the default values as it is. Example:

```
names:
  http: "http"
  h2c: "http2-h2c"
  h2: "http2-h2"
```

6. If required, change the apiVersion to apps/v1 in the **ocstub-py/templates/deployment.yaml** file as follows:

```
apiVersion: apps/v1
```

7. Deploy Stub.

#### Using Helm:

```
helm install -name <release_name> ocstub-py --set env.NF=<NF> --set
env.LOG_LEVEL=<DEBUG/INFO> --set service.name=<service_name> --set
service.appendReleaseName=false --namespace=<namespace_name> -f <valuesyaml-
file>
```

**Example:**

```
helm install -name nf1stub ocstub-py --set env.NF=PCF --set
env.LOG_LEVEL=DEBUG --set service.name=nf1stub --set
service.appendReleaseName=false --namespace=ocpcf -f ocstub-py/values.yaml
helm install -name nf2stub ocstub-py --set env.NF=PCF --set
env.LOG_LEVEL=DEBUG --set service.name=nf2stub --set
service.appendReleaseName=false --namespace=ocpcf -f ocstub-py/values.yaml
helm install -name nf3stub ocstub-py --set env.NF=PCF --set
env.LOG_LEVEL=DEBUG --set service.name=nf3stub --set
service.appendReleaseName=false --namespace=ocpcf -f ocstub-py/values.yaml
helm install -name nf11stub ocstub-py --set env.NF=PCF --set
env.LOG_LEVEL=DEBUG --set service.name=nf11stub --set
service.appendReleaseName=false --namespace=ocpcf -f ocstub-py/values.yaml
helm install -name nf12stub ocstub-py --set env.NF=PCF --set
env.LOG_LEVEL=DEBUG --set service.name=nf12stub --set
service.appendReleaseName=false --namespace=ocpcf -f ocstub-py/values.yaml
helm install -name nf21stub ocstub-py --set env.NF=PCF --set
env.LOG_LEVEL=DEBUG --set service.name=nf21stub --set
service.appendReleaseName=false --namespace=ocpcf -f ocstub-py/values.yaml
helm install -name nf22stub ocstub-py --set env.NF=PCF --set
env.LOG_LEVEL=DEBUG --set service.name=nf22stub --set
service.appendReleaseName=false --namespace=ocpcf -f ocstub-py/values.yaml
helm install -name nf31stub ocstub-py --set env.NF=PCF --set
env.LOG_LEVEL=DEBUG --set service.name=nf31stub --set
service.appendReleaseName=false --namespace=ocpcf -f ocstub-py/values.yaml
helm install -name nf32stub ocstub-py --set env.NF=PCF --set
env.LOG_LEVEL=DEBUG --set service.name=nf32stub --set
service.appendReleaseName=false --namespace=ocpcf -f ocstub-py/values.yaml
```

8. Run the following command to verify stub deployment.

```
helm ls -n ocpcf
```

The sample output is as follows:

| NAME     | REVISION         | UPDATED                    |             |           |
|----------|------------------|----------------------------|-------------|-----------|
| STATUS   | CHART            |                            | APP VERSION | NAMESPACE |
| nf11stub | 1                | Tue March 14 10:05:59 2024 |             |           |
| DEPLOYED | ocstub-py-24.2.6 | 1.0                        | ocpcf       |           |
| nf12stub | 1                | Tue March 14 10:06:00 2024 |             |           |
| DEPLOYED | ocstub-py-24.2.6 | 1.0                        | ocpcf       |           |
| nf1stub  | 1                | Tue March 14 10:05:57 2024 |             |           |
| DEPLOYED | ocstub-py-24.2.6 | 1.0                        | ocpcf       |           |
| nf21stub | 1                | Tue March 14 10:06:01 2024 |             |           |
| DEPLOYED | ocstub-py-24.2.6 | 1.0                        | ocpcf       |           |
| nf22stub | 1                | Tue March 14 10:06:02 2024 |             |           |
| DEPLOYED | ocstub-py-24.2.6 | 1.0                        | ocpcf       |           |
| nf2stub  | 1                | Tue March 14 10:05:58 2024 |             |           |
| DEPLOYED | ocstub-py-24.2.6 | 1.0                        | ocpcf       |           |
| nf31stub | 1                | Tue March 14 10:06:03 2024 |             |           |
| DEPLOYED | ocstub-py-24.2.6 | 1.0                        | ocpcf       |           |
| nf32stub | 1                | Tue March 14 10:06:11 2024 |             |           |
| DEPLOYED | ocstub-py-24.2.6 | 1.0                        | ocpcf       |           |
| nf3stub  | 1                | Tue March 14 10:05:59 2024 |             |           |
| DEPLOYED | ocstub-py-24.2.6 | 1.0                        | ocpcf       |           |

The status changes to **DEPLOYED** after the deployment is successful.  
Similarly, install all other stubs.

9. Run the following command to check the status of Stub deployment.  
helm status <release\_name> -n ocpcf

The sample output is as follows:

| NAME                                 | READY | STATUS | RESTARTS |
|--------------------------------------|-------|--------|----------|
| AGE                                  |       |        |          |
| nf11stub-ocstub-py-66449ddb94-qg2j90 | 19h   | 1/1    | Running  |
| nf12stub-ocstub-py-6b8575487-l8pxv0  | 19h   | 1/1    | Running  |
| nf1stub-ocstub-py-5ff485954c-prc2x0  | 19h   | 1/1    | Running  |
| nf21stub-ocstub-py-56cf5b77fc-x8wkr0 | 19h   | 1/1    | Running  |
| nf22stub-ocstub-py-547dfdf476-4j2sn0 | 19h   | 1/1    | Running  |
| nf2stub-ocstub-py-6fb6f786d6-bc9fr0  | 19h   | 1/1    | Running  |
| nf31stub-ocstub-py-c6c6d5584-5m48z0  | 19h   | 1/1    | Running  |
| nf32stub-ocstub-py-848dfc7757-q797z0 | 19h   | 1/1    | Running  |
| nf3stub-ocstub-py-6cb769ccd9-4fv9b0  | 19h   | 1/1    | Running  |

A sample output of Policy namespace with Policy and ATS after installation is as follows:

| NAME                                               | READY | STATUS | RESTARTS | AGE  |
|----------------------------------------------------|-------|--------|----------|------|
| ocpcf-appinfo-6c74cccd47-zsbb20                    |       | 1/1    | Running  | 155m |
| ocpcf-oc-binding-77fbb9b79c-jv7kd0                 |       | 1/1    | Running  | 155m |
| ocpcf-oc-diam-connector-6c6fd868bd-4zfrn0          |       | 1/1    | Running  | 155m |
| ocpcf-oc-diam-gateway-0                            |       | 1/1    | Running  | 147m |
| ocpcf-oc-oc-stub-595bb858d4-smzj80                 |       | 1/1    | Running  | 147m |
| ocpcf-ocats-ocats-policy-667d8cf78-b8bc80          |       | 1/1    | Running  | 147m |
| ocpcf-ocnp-alternate-route-75455c858d-f6qs80       |       | 1/1    | Running  | 146m |
| ocpcf-ocnp-alternate-route-75455c858d-sqvlg0       |       | 1/1    | Running  | 147m |
| ocpcf-ocnp-chf-connector-6b8b8bfcd6-jjch60         |       | 1/1    | Running  | 155m |
| ocpcf-ocnp-config-server-77bd99f96-mpscn0          |       | 1/1    | Running  | 155m |
| ocpcf-ocnp-egress-gateway-59c4b784cc-6dx4w0        |       | 1/1    | Running  | 16m  |
| ocpcf-ocnp-ingress-gateway-75c47c57bc-pljtc0       |       | 1/1    | Running  | 39m  |
| ocpcf-ocnp-nrf-client-nfdiscovery-74b854956b-s6blq |       | 1/1    | Running  |      |



|                                                      |      |         |  |
|------------------------------------------------------|------|---------|--|
| 0                                                    | 155m |         |  |
| ocpcf-occpn-nrf-client-nfmanagement-76cb55b8b8-tdjkj | 1/1  | Running |  |
| 0                                                    | 49m  |         |  |
| ocpcf-occpn-udr-connector-75ffb9db9b-7xz9v           | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-ocdns-ocdns-bind-57fbcd95dc-h4dtl              | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcf-ocpm-audit-service-5cc46665c4-j6vhh            | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-ocpm-cm-service-7795bb4c6c-446rb               | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-ocpm-policyds-75cbc9fc9d-7lbl5                 | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-ocpm-pre-59b94d979-jzkv4                       | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-ocpm-pre-test-84d9c89dd8-fqlpg                 | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-ocpm-queryservice-94895bf88-bhwcc              | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-pcf-amservice-56cddb75c9-ph7tt                 | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-pcf-smsservice-64b899d766-jfhjm                | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-pcf-ueservice-7c6bd7ccc9-mrnxn                 | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-pcrf-core-7594dbb7f8-z95vt                     | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcf-performance-689dd556b-7vblc                    | 1/1  | Running |  |
| 0                                                    | 155m |         |  |
| ocpcfnf11stub-5bb6b4f95d-v6fbb                       | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcfnf12stub-59fb974f5d-2qr42                       | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcfnf1stub-5bdf545fcb-zgbjb                        | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcfnf21stub-ff6db9d86-5hvj6                        | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcfnf22stub-794456fd66-sxq8q                       | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcfnf2stub-656755dc46-hnr8m                        | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcfnf31stub-68c6596b6-jdsgj                        | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcfnf32stub-f49b57d86-rklc8                        | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcfnf3stub-6c4c697648-lj6q7                        | 1/1  | Running |  |
| 0                                                    | 147m |         |  |
| ocpcf-ocpm-ldap-gateway-5fd489b8fd-52dqn             | 1/1  | Running |  |
| 0                                                    | 147m |         |  |

### 3.5.5.3 Deploying DNS Stub in Kubernetes Cluster

#### ① Note

Ensure there is sufficient resource requests and limit is configured for DNS Stub. Set the resource request and limit values in the **resources** section in the **values.yaml** file as follows:

```
resources: {}
# We usually recommend not to specify default resources and to leave
this as a conscious
# choice for the user. This also increases chances charts run on
environments with little
# resources, such as Minikube. If you do want to specify resources,
uncomment the following
# lines, adjust them as necessary, and remove the curly braces after
'resources:'. # limits:
#   cpu: 1000m
#   memory: 1024Mi
# requests:
#   cpu: 500m
#   memory: 500Mi
```

To deploy DNS stub in Kubernetes cluster, perform the following steps:

1. Go to the **ocats-policy-tools-24.2.7.0.0** folder and run the following command:  
`tar -zxvf ocdns-pkg-24.2.17.0.0.tgz`

The output of this command is:

```
[cloud-user@platform-bastion-1 ocdns-pkg-24.2.17.0.0]$ ls -ltrh
total 211M
-rw-----. 1 cloud-user cloud-user 211M Mar 14 14:49 ocdns-bind-
image-24.2.17.tar
-rw-r--r--. 1 cloud-user cloud-user 2.9K Mar 14 14:49 ocdns-
bind-24.2.17.tgz
```

2. Run the following command in your cluster to load the DNS Stub image:  
`docker load --input ocdns-bind-image-24.2.17.tar`
3. Run the following commands to tag and push the DNS stub to the registry:  
  
`docker tag ocdns-bind:24.2.17 localhost:5000/ocdns-bind:24.2.17`  
`docker push localhost:5000/ocdns-bind:24.2.17`
4. Run the following command to untar the helm charts (ocdns-bind-24.2.17.tgz):  
`tar -zxvf ocdns-bind-24.2.17.tgz`
5. Update the registry name, image name and tag (if required) in the ocdns-bind/  
values.yaml file as required. Open the **values.yaml** file and update the  
image.repository and image.tag parameters.

- Run the following command to install DNS Stub:

```
helm :
[cloud-user@platform-bastion-1 ocdns-bind]$ helm install -name ocdns
ocdns-bind-24.2.17.tgz --namespace ocpfc -f ocdns-bind/values.yaml
```

- Run the following command to capture the cluster name of the pcf deployment, namespace where nfstubs are deployed and cluster IP of DNS Stub.  
`kubectl get svc -n ocpfc | grep dns`

| NAME          | TYPE      | CLUSTER-IP   | EXTERNAL-IP |
|---------------|-----------|--------------|-------------|
| ocdns         | ClusterIP | 10.233.11.45 | <none>      |
| UDP, 6236/TCP |           | 19h          | 53/         |

#### Note

This information is required to configure DNS stub.

**Figure 3-10 Cluster Name**

```
kubectl -n kube-system get configmap kubeadm-config -o yaml | grep
clusterName
clusterName: platform
```

### 3.5.5.4 Deploying AMF Stub in Kubernetes Cluster

To deploy OCAMF stub in Kubernetes cluster:

- Go to the **ocats-policy-tools-24.2.7.0.0** folder and run the following command:  
`tar -zxvf ocamf-pkg-24.2.17.0.0.tgz`

The output of this command is:

```
[cloud-user@platform-bastion-1 ocamf-pkg-24.2.17.0.0]$ ls -ltrh
total 211M
-rw-----. 1 cloud-user cloud-user 211M Mar 14 14:49 ocamf-stub-
image-24.2.17.tar
-rw-r--r--. 1 cloud-user cloud-user 2.9K Mar 14 14:49 ocamf-
stub-24.2.17.tgz
```

- Run the following command in your cluster to load the AMF Stub image:  
`docker load --input ocamf-stub-image-24.2.17.tar`
- Run the following command to tag and push the DNS stub to the registry:

```
docker tag ocamf-stub:24.2.17 localhost:5000/ocamf-stub:24.2.17
docker push localhost:5000/ocamf-stub:24.2.17
```

- Run the following command to untar the helm charts (ocamf-stub-24.2.17.tgz):  
`tar -zxvf ocamf-stub-24.2.17.tgz`

5. Update the registry name, image name and tag (if required) in the `ocamf-stub/values.yaml` file as required. Open the **values.yaml** file and update the registry name, image name, and tag (if required) in the file.
6. Run the following command to install AMF Stub:  
**Using Helm:**

```
[cloud-user@platform-bastion-1 ocamf-stub]$ helm install-name ocamf2 ocamf-
stub-24.2.17.tgz --set service.name=ocamf2 --namespace ocpf -f ocamf-stub/
values.yaml
```

The status changes to **RUNNING** after the deployment is successful.

The following is a sample output for a successful deployment:

```
ocamf2-ocamf-ocamf-stub-79c8fbd6f7-qp5cl      1/1      Running
0          5h47m
```

### 3.5.5.5 Deploying LDAP Stub in Kubernetes Cluster

To deploy `oc-ldap` stub in the Kubernetes cluster, perform the following steps:

1. Go to the `ocats-policy-tools-24.2.7.0.0` folder and run the following command:  
`tar -zxvf oc-ldap-org1-pkg-24.2.17.0.0`

The following is the output:

```
[cloud-user@platform-bastion-1 oc-ldap-org1-pkg-24.2.17.0.0]$ ls -ltrh
total 211M
-rw----- 1 cloud-user cloud-user 211M Mar 14 14:49 oc-ldap-org1-
image-24.2.17.tar
-rw-r--r-- 1 cloud-user cloud-user 2.9K Mar 14 14:49 oc-ldap-
org1-24.2.17.tgz
```

2. Run the following command in your cluster to load the LDAP Stub image:  
`docker load --input oc-ldap-org1-image-24.2.17.tar`
3. Run the following command to tag and push the DNS stub to the registry:  
  
`docker tag oc-ldap-org1:24.2.17 localhost:5000/oc-ldap-org1:24.2.17`  
`docker push localhost:5000/oc-ldap-org1:24.2.17`
4. Run the following command to untar the helm charts (`oc-ldap-org1-24.2.17.tgz`):  
`tar -zxvf oc-ldap-org1-24.2.17.tgz`
5. Update the registry name, image name and tag (if required) in the `oc-ldap-org1/values.yaml` file as required. Open the **values.yaml** file and update the registry name, image name, and tag (if required) in the file.
6. Run the following command to install AMF Stub:  
**Using Helm:**

```
[cloud-user@platform-bastion-1 oc-ldap-org1]$ helm upgrade --install --
namespace ocpf --set image.repository=localhost:5000/ocnp/oc-ldap-org1
oc-ldap-org1 oc-ldap-org1-24.2.17.tgz
```

The status changes to **RUNNING** after the deployment is successful.

The following is a sample output for a successful deployment:

```
ocpcf-oc-ldap-org1-7b9d957bc6-ngtrl      1/1      Running
0          5h47m
```

**Note**

oc-ldap-org1-secret of the OC-LDAP Stub is being created by Helm chart that comes with ATS package.

### 3.5.5.6 Deploying ocdiam Simulator in Kubernetes Cluster

To deploy ocdiam Simulator in the Kubernetes cluster, perform the following steps:

1. Go to the ocats-policy-tools-24.2.7.0.0 folder and run the following command:

```
tar -zxvf ocdiam-pkg-24.2.17.0.0
```

The following is the output:

```
[cloud-user@platform-bastion-1 ocdiam-pkg-24.2.17.0.0]$ ls -ltrh
total 908M
-rw-----. 1 cloud-user cloud-user 908M Mar 14 14:49 ocdiam-sim-
image-24.2.17.tar
-rw-r--r--. 1 cloud-user cloud-user 3.8K Mar 14 14:49 ocdiam-
sim-24.2.17.tgz
```

2. Run the following command in your cluster to load the Diameter Simulator Image using the command :

```
docker load --input ocdiam-sim-image-24.2.17.tar
```

3. Run the following command to tag and push the DNS stub to the registry:

```
docker tag ocdiam-sim:24.2.17 localhost:5000/ocdiam-sim:24.2.17
docker push localhost:5000/ocdiam-sim:24.2.17
```

4. Run the following command to untar the helm charts (ocdiam-sim-24.2.17.tgz):

```
tar -zxvf ocdiam-sim-24.2.17.tgz
```

5. Update the registry name, image name and tag (if required) in the ocdiam-sim/values.yaml file as required. Open the **values.yaml** file and update the registry name, image name, and tag (if required) in the file.

6. Run the following command to install Diameter Simulator:  
**Using Helm:**

```
[cloud-user@platform-bastion-1 ocdiam-sim]$ helm install-name ocdiam-sim
ocdiam-sim --namespace ocpcf -f ocdiam-sim/values.yaml
```

The status changes to **RUNNING** after the deployment is successful.

The following is a sample output for a successful deployment:

```
ocdiam-sim-69968444b6-fg6ks    1/1    Running    0    5h47m
```

Sample of Policy namespace with Policy and ATS after installation:

```
[cloud-user@platform-bastion-1 ocstub-pkg-24.2.6.0.0]$ kubectl get po -n ocpcf
NAME                                READY   STATUS
RESTARTS   AGE
ocpcf-appinfo-6c74cccd47-zsbb2      1/1     Running
0         155m
ocpcf-oc-binding-77fbb9b79c-jv7kd   1/1     Running
0         155m
ocpcf-oc-diam-connector-6c6fd868bd-4zfrn 1/1     Running
0         155m
ocpcf-oc-diam-gateway-0             1/1     Running
0         147m
ocamf2-ocamf-stub-595bb858d4-smzj8   1/1     Running
0         147m
ocpcf-ocats-ocats-policy-667d8cf78-b8bc8 1/1     Running
0         147m
ocpcf-occnp-alternate-route-75455c858d-f6qs8 1/1     Running
0         146m
ocpcf-occnp-chf-connector-6b8b8bfd6-jjch6 1/1     Running
0         155m
ocpcf-occnp-config-server-77bd99f96-mpscn 1/1     Running
0         155m
ocpcf-occnp-egress-gateway-59c4b784cc-6dx4w 1/1     Running
0         16m
ocpcf-occnp-ingress-gateway-75c47c57bc-pljtc 1/1     Running
0         39m
ocpcf-occnp-nrf-client-nfdiscovery-74b854956b-s6blq 1/1     Running
0         155m
ocpcf-occnp-nrf-client-nfmanagement-76cb55b8b8-tdjkj 1/1     Running
0         49m
ocpcf-occnp-udr-connector-75ffb9db9b-7xz9v 1/1     Running
0         155m
ocpcf-ocdns-ocdns-bind-57fbcd95dc-h4dtl 1/1     Running
0         147m
ocpcf-ocpm-audit-service-5cc46665c4-j6vhh 1/1     Running
0         155m
ocpcf-ocpm-cm-service-7795bb4c6c-446rb 1/1     Running
0         155m
ocpcf-ocpm-policyds-75cbc9fc9d-7lbl5 1/1     Running
0         155m
ocpcf-ocpm-pre-59b94d979-jzkhv4 1/1     Running
0         155m
ocpcf-ocpm-pre-test-84d9c89dd8-fqlpg 1/1     Running
0         155m
ocpcf-ocpm-queryservice-94895bf88-bhwcc 1/1     Running
0         155m
ocpcf-pcf-amservice-56cbbb75c9-ph7tt 1/1     Running
ocpcf-pcf-smsservice-64b899d766-jfhjm 1/1     Running
0         155m
```

|                                          |     |         |
|------------------------------------------|-----|---------|
| ocpcf-pcf-ueservice-7c6bd7ccc9-mrnxn     | 1/1 | Running |
| 0 155m                                   |     |         |
| ocpcf-pcrf-core-7594dbb7f8-z95vt         | 1/1 | Running |
| 0 155m                                   |     |         |
| ocpcf-performance-689dd556b-7vblc        | 1/1 | Running |
| 0 155m                                   |     |         |
| ocpcf-fnf11stub-5bb6b4f95d-v6fbb         | 1/1 | Running |
| 0 147m                                   |     |         |
| ocpcf-fnf12stub-59fb974f5d-2qr42         | 1/1 | Running |
| 0 147m                                   |     |         |
| ocpcf-fnf1stub-5bdf545fcb-zgbjb          | 1/1 | Running |
| 0 147m                                   |     |         |
| ocpcf-fnf21stub-ff6db9d86-5hvj6          | 1/1 | Running |
| 0 147m                                   |     |         |
| ocpcf-fnf22stub-794456fd66-sxq8q         | 1/1 | Running |
| 0 147m                                   |     |         |
| ocpcf-fnf2stub-656755dc46-hnr8m          | 1/1 | Running |
| 0 147m                                   |     |         |
| ocpcf-fnf31stub-68c6596b6-jdsgj          | 1/1 | Running |
| 0 147m                                   |     |         |
| ocpcf-fnf32stub-f49b57d86-rklc8          | 1/1 | Running |
| 0 147m                                   |     |         |
| ocpcf-fnf3stub-6c4c697648-lj6q7          | 1/1 | Running |
| 0 147m                                   |     |         |
| ocpcf-ocpm-ldap-gateway-5fd489b8fd-52dqn | 1/1 | Running |
| 0 147m                                   |     |         |
| ocdiam-sim-69968444b6                    | 1/1 | Running |
| 0 147m                                   |     |         |

## 3.5.6 Post-Installation Steps

This section describes the post-installation steps for Policy.

### Alternate Route Service Configurations

To edit the Alternate Route Service deployment file (ocpcf-ocnp-alternate-route) that points to DNS Stub, perform the following steps:

1. Run the following command to get searches information from dns-bind pod to enable communication between Alternate Route and dns-bind service:

```
kubectl exec -it <dns-bind pod> -n <NAMESPACE> -- /bin/bash -c 'cat /etc/resolv.conf' | grep search | tr ' ' '\n' | grep -v 'search'
```

The following output is displayed after running the command:

**Figure 3-11 Sample Output**

```
[flanders@bastion-1 ~]$ kubectl exec -it ocdns-stub-ocdns-bind-7467cf56c8-5dgg2 -n flanders-ns -- /bin/bash -c 'cat /etc/resolv.conf' | grep search | tr ' ' '\n' | grep -v 'search'
flanders-ns.svc.inferno.lab.us.oracle.com
svc.inferno.lab.us.oracle.com
inferno.lab.us.oracle.com
```

By default alternate service will point to CoreDNS and you will see following settings in deployment file:

**Figure 3-12 Alternate Route Service Deployment File**

```

terminationMessagePolicy: File
dnsPolicy: ClusterFirst
restartPolicy: Always

```

2. Run the following command to edit the deployment file and add the following content in alternate service to query DNS stub:

```
$kubectl edit deployment ocpcf-occpn-alternate-route -n ocpcf
```

- a. Add the IP Address of the nameserver that you have recorded after installing the DNS stub (cluster IP Address of DNS Stub).
- b. Add the search information one by one which you recorded earlier.
- c. Set dnsPolicy to "None".

```

dnsConfig:
  nameservers:
    - 10.233.33.169      // cluster IP of DNS Stub
  searches:
    - ocpcf.svc.occne15-ocpcf-ats
    - svc.occne15-ocpcf-ats
    - occne15-ocpcf-ats
dnsPolicy: None

```

For example:

**Figure 3-13 Example**

```

terminationMessagePath: /dev/termination-log
terminationMessagePolicy: File
dnsConfig:
  nameservers:
    - 10.233.31.245
  searches:
    - flanders-ns.svc.inferno.lab.us.oracle.com
    - svc.inferno.lab.us.oracle.com
    - inferno.lab.us.oracle.com
dnsPolicy: None
restartPolicy: Always
schedulerName: default-scheduler

```

### NRF client configmap

In the -application-config configmap, configure the following parameters with the respective values:

- primaryNrfApiRoot=nf1stub.<namespace\_gostubs\_are\_deployed\_in>.svc:8080  
**Example:** primaryNrfApiRoot=nf1stub.ocats.svc:8080
- secondaryNrfApiRoot=nf1stub.ocats.svc:8080 (Remove the secondaryNrfApiRoot)
- nrfClientSubscribeTypes=UDR, CHF, NWDAF
- supportedDataSetId=POLICY (Remove the supportedDataSetId)



**Note**

Configure these values at the time of Policy deployment.

**Note**

To get all configmaps in your namespace, execute the following command:  
`kubectl get configmaps -n <Policy_namespace>`

**Persistent Volume (Optional)**

If persistent volume is used, follow the post-installation steps provided in the [Persistent Volume for 5G ATS](#) section.

## 3.6 Installing ATS for SCP

This section describes Automated Testing Suite (ATS) installation procedures for Service Communication Proxy (SCP) in a cloud native environment.

You must perform ATS installation procedures for SCP in the same sequence as outlined in the following sections.

### 3.6.1 Prerequisites

To run SCP test cases, the following prerequisites are required.

#### 3.6.1.1 Software Requirements

This section lists the software that must be installed before installing ATS.

**Table 3-18 Preinstalled Software**

| Software   | Version                        |
|------------|--------------------------------|
| Kubernetes | 1.29.x, 1.28.x, 1.27.x, 1.26.x |
| Helm       | 3.13.2                         |
| Podman     | 4.6.1                          |

To check the versions of the preinstalled software in the cloud native environment, run the following commands:

```
kubectl version
```

```
helm version
```

```
podman version
```

### 3.6.1.2 Environment Setup Requirements

This section describes the requirements for the client machine, that is, the machine used by the user to run deployment commands.

The client machine should have:

- Helm repository configured.
- Network access to the Helm repository and Docker image repository.
- Network access to the Kubernetes cluster.
- Required environment settings to run `kubectl`, `docker`, and `podman` commands. The environment should have privileges to create a namespace in the Kubernetes cluster.
- Helm client is installed with the push plugin. Configure the environment in such a manner that the `helm install` command deploys the software in the Kubernetes cluster.

### 3.6.1.3 Resource Requirements

This section describes ATS resource requirements for SCP.

#### Overview - Total Number of Resources

The following table describes the total resource usage by different resource types:

- SCP SUT
- cnDB Tier
- ATS

**Table 3-19 SCP - Total Number of Resources**

| Resource Name              | CPU        | Memory (GB) | Storage (GB) |
|----------------------------|------------|-------------|--------------|
| SCP SUT Totals             | 56         | 61          | 0            |
| cnDBTier Totals            | 40         | 40          | 20           |
| ATS Totals                 | 100        | 106         | 4            |
| <b>Grand Total SCP ATS</b> | <b>196</b> | <b>207</b>  | <b>24</b>    |

#### SCP Pods Resource Requirements

This section describes the resources required to deploy SCP ATS.

**Table 3-20 SCP Pods Resource Requirements**

| Microservice      | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | # Replicas (regular deployment) | # Replicas (ATS deployment) | CPUs Required (ATS) - Total | Memory Required (ATS) - Total (GB) | Storage PVC Required - Total (GB) |
|-------------------|-----------------------|------------------------------|-----------------------------------|---------------------------------|-----------------------------|-----------------------------|------------------------------------|-----------------------------------|
| SCP Pods          |                       |                              |                                   |                                 |                             |                             |                                    |                                   |
| scpc-subscription | 1                     | 1                            | 0                                 | 1                               | 1                           | 1                           | 1                                  | 0                                 |
| scpc-notification | 4                     | 4                            | 0                                 | 1                               | 1                           | 4                           | 4                                  | 0                                 |
| scpc-audit        | 3                     | 4                            | 0                                 | 1                               | 1                           | 3                           | 4                                  | 0                                 |

Table 3-20 (Cont.) SCP Pods Resource Requirements

| Microservice              | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | # Replicas (regular deployment) | # Replicas (ATS deployment) | CPUs Required (ATS) - Total | Memory Required (ATS) - Total (GB) | Storage PVC Required - Total (GB) |
|---------------------------|-----------------------|------------------------------|-----------------------------------|---------------------------------|-----------------------------|-----------------------------|------------------------------------|-----------------------------------|
| scpc-configuration        | 2                     | 2                            | 0                                 | 1                               | 1                           | 2                           | 2                                  | 0                                 |
| scp-worker                | 4                     | 8                            | 0                                 | 2                               | 1                           | 4                           | 8                                  | 0                                 |
| scpc-alternate-resolution | 2                     | 2                            | 0                                 | 1                               | 1                           | 2                           | 2                                  | 0                                 |
| scp-nrfproxy              | 8                     | 8                            | 0                                 | 2                               | 1                           | 8                           | 8                                  | 0                                 |
| scp-cache                 | 8                     | 8                            | 0                                 | 3                               | 1                           | 8                           | 8                                  | 0                                 |
| scp-mediation             | 8                     | 8                            | 0                                 | 2                               | 1                           | 8                           | 8                                  | 0                                 |
| scp-load-manager          | 8                     | 8                            | 0                                 | 2                               | 1                           | 8                           | 8                                  | 0                                 |
| scp-oauth-nrfproxy        | 8                     | 8                            | 0                                 | 2                               | 1                           | 8                           | 8                                  | 0                                 |
| <b>SCP SUT Totals</b>     |                       |                              |                                   |                                 |                             | <b>56</b>                   | <b>61</b>                          | <b>0</b>                          |

**ATS Resource Requirements for SCP**

This section describes the ATS resources required to deploy SCP-ATS.

Table 3-21 ATS Resource Requirements

| Microservice                     | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | # Replicas (regular deployment) | # Replicas (ATS deployment) | CPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|----------------------------------|-----------------------|------------------------------|-----------------------------------|---------------------------------|-----------------------------|-----------------------|------------------------------|-----------------------------------|
| ATS Behave                       | 6                     | 12                           | 4                                 | -                               | 1                           | 6                     | 12                           | 4                                 |
| ATS pystub                       | 1                     | 1                            | -                                 | -                               | 90                          | 91                    | 91                           | 0                                 |
| DNS Stub                         | 1                     | 1                            | -                                 | -                               | 1                           | 1                     | 1                            | 0                                 |
| Global Egress Rate Limiting Stub | 1                     | 1                            | -                                 | -                               | 1                           | 1                     | 1                            | 0                                 |
| ATS DD Client stub               | 1                     | 1                            | -                                 | -                               | 1                           | 1                     | 1                            | 0                                 |
| <b>ATS Totals</b>                |                       |                              |                                   |                                 |                             | <b>100</b>            | <b>106</b>                   | <b>0</b>                          |

### 3.6.1.4 Downloading the ATS Package

This section provides information about how to download the ATS package.

To locate and download the ATS Image from MOS:

1. Log in to [My Oracle Support](#) using the appropriate login credentials.
2. Click the **Patches & Updates** tab.
3. In the Patch Search section, click **Product or Family (Advanced)**.
4. Enter Oracle Communications Cloud Native Core - 5G in the **Product** field.

5. Select Oracle Communications Cloud Native Core Service Communication Proxy <release\_number> from the **Release** drop-down list.
6. Click **Search**.  
The Patch Advanced Search Results list appears.
7. Select the required ATS patch from the list.  
The Patch Details window appears.
8. Click **Download**.  
The File Download window appears.
9. Click the `ocats_ocscp_csar_24_2_6_0_0.pkg` file to download the CNC SCP ATS package file.  
The `ocats_ocscp_csar_24_2_6_0_0.pkg` package contains the following files:

`ocats_ocscp_csar_24_2_6_0_0.zip`  
`mcafee-gen-ats-csar-24.2.6.log`

**Note**

The above zip file contains all the images and custom values required for 24.2.6 release of OCATS-OCSCP.

Unzip the `ocats_ocscp_csar_24_2_6_0_0.zip` file to get the following files and folders:

```
.
|-- Definitions
|   |-- ocats_ocscp_ats_tests.yaml
|   |-- ocats_ocscp_cne_compatibility.yaml
|   `-- ocats_ocscp.yaml
|-- Files
|   |-- ChangeLog.txt
|   |-- Helm
|   |   |-- ocats-ocscp-24.2.6.tgz
|   |-- Licenses
|   |-- ocats-ddclientstub-24.2.6.tar
|   |-- ocats-dnsstub-24.2.6.tar (Docker Image)
|   |-- ocats-pystub-24.2.6.tar (Docker Image)
|   |-- ocats-scp-24.2.6.tar (Docker Image)
|   |-- ocats-scpglbratelimitstub-24.2.6.tar (Docker Image)
|   |-- Oracle.cert
|   `-- Tests
|-- ocats_ocscp_csar_24_2_6_0_0.zip
|-- ocats_ocscp.mf
|-- Scripts
|   |-- ocats_ocscp_custom_serviceaccount_24.2.6.yaml (Template to create
custom service account)
|   |-- ocats_ocscp_tests_jenkinsjobs_24.2.6.tgz. ( ocscp_tests and jenkins
jobs folder to be copied if persistent volume is deployed)
|   `-- ocats_ocscp_values_24.2.6.yaml (Custom values file for installation)
`-- TOSCA-Metadata
    `-- TOSCA.meta
```

10. Copy the umbrella Helm chart `ocats-ocscp-24.2.6.tgz` file from the **Files** folder to Kubernetes cluster where you want to deploy ATS.  
The following table describes ATS parameters in the `ocats_ocscp_values_24.2.6.yaml` file:

**Table 3-22** ATS Parameters of the YAML File

| Parameter                                                  | Default Value | Possible Values                          | Description                                                                                                                                                                                                                                                                                                             |
|------------------------------------------------------------|---------------|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>ocatsdnsstubService</code>                           | true          | true, false                              | Set it to true or false depending on the need of user.<br>Setting these values to true to deploy <code>ocats-dnsstub</code> , <code>ocats-scp stub</code> , <code>ocats-scpglbratelimitstub</code> , <code>ocats-ddclientStub</code> , <code>ocats-pystubs</code> ( <code>ausf1</code> , <code>udm3</code> etc.)        |
| <code>ocatsscpService</code>                               | true          | true, false                              | Set it to true or false depending on the requirement.<br>Setting these values to true to deploy <code>ocats-dnsstub</code> , <code>ocats-scp stub</code> , <code>ocats-scpglbratelimitstub</code> , <code>ocats-ddclientStub</code> , <code>ocats-pystubs</code> ( <code>ausf1</code> , <code>udm3</code> , and so on)  |
| <code>ocatsscpglbratelimitstubService</code>               | true          | true, false                              | Set it to true or false depending on the requirement.<br>Setting these values to true to deploy <code>ocats-dnsstub</code> , <code>ocats-scp stub</code> , <code>ocats-scpglbratelimitstub</code> , <code>ocats-ddclientStub</code> , <code>ocats-pystubs</code> ( <code>ausf1</code> , <code>udm3</code> , and so on.) |
| <code>ocatsddclientstubService</code>                      | true          | true, false                              | Set it to true or false depending on the requirement.<br>Setting these values to true to deploy <code>ocats-dnsstub</code> , <code>ocats-scp stub</code> , <code>ocats-scpglbratelimitstub</code> , <code>ocats-ddclientStub</code> , <code>ocats-pystubs</code> ( <code>ausf1</code> , <code>udm3</code> , and so on.) |
| <code>ausf1Stubs</code>                                    | true          | true, false                              | Set it to true or false depending on the requirement.<br>Setting these values to true to deploy all the <code>ocats-pystubs</code> ( <code>ausf1</code> , <code>udm3</code> , <code>chf1</code> , <code>scp3</code> , and so on.)                                                                                       |
| <code>sutScpIPFamiliesforATSRUN</code>                     | [IPv4]        | [IPv4], [IPv6], [IPv4,IPv6], [IPv6,IPv4] | The parameter is used to specify the IP families that ATS will consider when running test cases.<br><b>Note:</b> If any value other than those specified is provided, ATS will proceed with the assumption that the deployment supports IPv4 only.                                                                      |
| <code>traffic.sidecar.istio.io/excludeOutboundPorts</code> | 8091          | -                                        | This annotation under <code>lbDeployment</code> is required for fetching metrics from soothsayer pods, which are required for a few FT's of ATS. When ATS runs in an ASPEN MESH environment, do not change this port.                                                                                                   |

Table 3-22 (Cont.) ATS Parameters of the YAML File

| Parameter                                                                                                                                                                                                                          | Default Value                           | Possible Values                                                                                  | Description                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| traffic.sidecar.istio.io/excludeInboundPorts                                                                                                                                                                                       | 8080                                    | -                                                                                                | This annotation under lbDeployment is required for fetching metrics from soothsayer pods, which are required for a few FT's of ATS. When ATS runs in an ASPEN MESH environment, do not change this port.                                                                                                                                                        |
| tokenConsumptionIntervalInMillis                                                                                                                                                                                                   | 50                                      | Count in milliseconds                                                                            | Token Consumption Simulation Parameters.                                                                                                                                                                                                                                                                                                                        |
| scpStubNflInstanceId                                                                                                                                                                                                               | 2faf1bbc-6e4a-4454-a507-a14ef8e1bc22    | nflInstanceId of SCP                                                                             | NF Instance ID of SCP.                                                                                                                                                                                                                                                                                                                                          |
| rateDataReporterStartingOffset                                                                                                                                                                                                     | 35                                      | Value in milliseconds                                                                            | -                                                                                                                                                                                                                                                                                                                                                               |
| coherence.clusterName                                                                                                                                                                                                              | scpstub-coherence-cluster               | Local Coherence Cluster name, size not more than 66 characters                                   | Local Coherence Cluster name size must not be more than 66 characters.                                                                                                                                                                                                                                                                                          |
| coherence.clusterName.federation.remoteScpOne.fqdnOrIp                                                                                                                                                                             | ocscp-scp-cache.scpvc.svc.cluster.local | -                                                                                                | FQDN or IP of federation configuration.                                                                                                                                                                                                                                                                                                                         |
| coherence.clusterName.federation.remoteScpOne.port                                                                                                                                                                                 | 30001                                   | -                                                                                                | Port number of federation configuration.                                                                                                                                                                                                                                                                                                                        |
| coherence.clusterName.federation.remoteScpOne.clusterName                                                                                                                                                                          | scp-coherence-cluster                   | Ensure that the cluster name is unique among all participants. Size not more than 66 characters. | remoteScpOne Coherence Cluster name.                                                                                                                                                                                                                                                                                                                            |
| serviceIpFamilyPolicy.ocatsdnsstubService<br>serviceIpFamilyPolicy.ocatsscpService<br>serviceIpFamilyPolicy.ocatsscpglbratelimitstubService<br>serviceIpFamilyPolicy.ocatsddclientstubService<br>serviceIpFamilyPolicy.stubService | SingleStack                             | SingleStack,<br>PreferDualStack,<br>RequireDualStack                                             | IpFamilyPolicy of ocatsdnsstubService, ocatsscpService, ocatsscpglbratelimitstubService, ocatsddclientstubService and pyStubs.<br><b>Note:</b> PreferDualStack and RequireDualStack values can only be used if the setup is dual stack.                                                                                                                         |
| serviceIpFamilies.ocatsdnsstubService<br>serviceIpFamilies.ocatsscpService<br>serviceIpFamilies.ocatsscpglbratelimitstubService<br>serviceIpFamilies.ocatsddclientstubService<br>serviceIpFamilies.stubService                     | [IPv4]                                  | [IPv4], [IPv6], [IPv4,IPv6], [IPv6,IPv4]                                                         | IpFamilies of ocatsdnsstubService, ocatsscpService, ocatsscpglbratelimitstubService, ocatsddclientstubService and pyStubs.<br><b>Note:</b> If serviceIpFamilyPolicy is SingleStack, then serviceIpFamilies can be [IPv4] or [IPv6]. If serviceIpFamilyPolicy is PreferDualStack or RequireDualStack, then serviceIpFamilies can be [IPv4,IPv6] or [IPv6, IPv4]. |
| PVEnabled                                                                                                                                                                                                                          | false                                   | true, false                                                                                      | Enabling persistent volume.                                                                                                                                                                                                                                                                                                                                     |
| PVClaimName                                                                                                                                                                                                                        | false                                   | Name                                                                                             | Persistent volume claim name.                                                                                                                                                                                                                                                                                                                                   |
| atsGuiTLSEnabled                                                                                                                                                                                                                   | false                                   | true, false                                                                                      | Enabling Https in Jenkins GUI.                                                                                                                                                                                                                                                                                                                                  |
| atsCommunicationTLSEnabled                                                                                                                                                                                                         | false                                   | true, false                                                                                      | Enabling Https communication.                                                                                                                                                                                                                                                                                                                                   |

**Table 3-22 (Cont.) ATS Parameters of the YAML File**

| Parameter                                               | Default Value                                           | Possible Values                                                                     | Description                                                                                                                                                                             |
|---------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocats-scp.image.repository                              | <docker-registryIP:docker-registryport>/ocats/ocats-scp | <Image repository name:port>/ocats/ocats-scp                                        | Image repository and port of ocats scp image.                                                                                                                                           |
| ocats-scp.image.tag                                     | helm-tag                                                | Value of tag to be deployed                                                         | Tag of ocats-scp image.                                                                                                                                                                 |
| ocats-scp.image.pullPolicy                              | Always                                                  | Always, IfNotPresent, Never                                                         | Tag of ocats-scp image.                                                                                                                                                                 |
| ocats-scp.replicaCount                                  | 1                                                       | Positive integers                                                                   | Replica count of ocats-scp stub.                                                                                                                                                        |
| ocats-scp.resources.limits.cpu                          | 6                                                       | CPU value that is allocated                                                         | Limit to CPU allocated to ocats-scp pod.                                                                                                                                                |
| ocats-scp.resources.limits.memory                       | 12Gi                                                    | Memory values that is allocated (in Gi or mi)                                       | Limit to memory allocated to ocats-scp pod .                                                                                                                                            |
| ocats-scp.resources.requests.cpu                        | 6                                                       | CPU value that is allocated (must be less than or equal to limits)                  | Request of CPU allocation for ocats-scp.                                                                                                                                                |
| ocats-scp.resources.requests.memory                     | 12Gi                                                    | Memory value that is allocated (in Gi or mi) (must be less than or equal to limits) | Request of memory allocation for ocats-scp.                                                                                                                                             |
| ocats-scp.service.customExtension.labels                | {}                                                      | Label of node                                                                       | Node labels for node allocation during deployment.                                                                                                                                      |
| ocats-scp.service.customExtension.type                  | LoadBalancer                                            | ClusterIP, NodePort, LoadBalancer                                                   | Service type of ocats-scp pod                                                                                                                                                           |
| ocats-scp.service.customExtension.port                  | 8080                                                    | Port number                                                                         | Port number of ocats-scp service.                                                                                                                                                       |
| ocats-scp.service.customExtension.staticNodePortEnabled | false                                                   | true, false                                                                         | Enabling of static node port.                                                                                                                                                           |
| ocats-scp.service.customExtension.staticNodePort        | false                                                   | Port number                                                                         | Port number of static node port.                                                                                                                                                        |
| ocats-scp.service.ports.http.port                       | 8080                                                    | Port number                                                                         | Port number of the ocats-scp service if https is not enabled.                                                                                                                           |
| ocats-scp.service.ports.http.staticNodePortEnabled      | false                                                   | true, false                                                                         | Enabling of static node port.                                                                                                                                                           |
| ocats-scp.service.ports.http.staticNodePort             | false                                                   | Port number                                                                         | Port number of static node port.                                                                                                                                                        |
| ocats-scp.service.ipFamilyPolicy                        | SingleStack                                             | SingleStack, PreferDualStack, RequireDualStack                                      | ipFamilyPolicy to be allocated to the ocats-scp service.<br><br>This value will be referred to as whatever is defined at serviceIpFamilyPolicy.ocatsscpService under global parameters. |

Table 3-22 (Cont.) ATS Parameters of the YAML File

| Parameter                                  | Default Value                                               | Possible Values                                  | Description                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------|-------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocats-scp.service.ipFamilies               | [IPv4]                                                      | [IPv4], [IPv6], [IPv4,IPv6], [IPv6,IPv4]         | ipFamilies to be allocated to the ocats-scp service.<br>This value will be referred to as the value defined at serviceIpFamilies.ocatsscpService under global parameters.                                                                                                                                                                                                                                         |
| SELECTED_NF                                | SCP                                                         | NF name                                          | ATS parameters are set with default values in the ocats_ocscp_values_23.3.0.yaml file. Update ATS parameters with the actual value based on the environment, and then deploy the OCATS_OCSCP chart using this ocats_ocscp_values_23.3.0.yaml file. The updated ATS parameters are automatically applied during the deployment process, and the ATS will come up with the configuration as mentioned in this file. |
| NFNAMESPACE                                | scpsvc                                                      | Update the SCP namespace                         | -                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CLUSTERDOMAIN                              | cluster.local                                               | Cluster Domain where SCP is Deployed             | -                                                                                                                                                                                                                                                                                                                                                                                                                 |
| DESTNAMESPACE                              | scpsvc                                                      | Test Stubs NameSpace same as SCP Namespace       | -                                                                                                                                                                                                                                                                                                                                                                                                                 |
| ocats-dnsstub.image.repository             | <docker-registryIP:docker-registryport>/ocats/ocats-dnsstub | <Image repository name:port>/ocats/ocats-dnsstub | Image repository and port of ocats-dnsstub.                                                                                                                                                                                                                                                                                                                                                                       |
| ocats-dnsstub.image.tag                    | helm-tag                                                    | Value of tag to be deployed                      | Tag of ocats-dnsstub image.                                                                                                                                                                                                                                                                                                                                                                                       |
| ocats-dnsstub.image.pullPolicy             | Always                                                      | Always, IfNotPresent, Never                      | Image pull policy of ocats-dnsstub image.                                                                                                                                                                                                                                                                                                                                                                         |
| ocats-dnsstub.replicaCount                 | 1                                                           | Positive integers                                | Replica count of ocats-dnsstub.                                                                                                                                                                                                                                                                                                                                                                                   |
| ocats-dnsstub.service.customExtension.type | ClusterIP                                                   | ClusterIP, NodePort, LoadBalancer                | Service type of ocats-dnsstub pod.                                                                                                                                                                                                                                                                                                                                                                                |
| ocats-dnsstub.service.customExtension.port | 53                                                          | Port                                             | Port of ocats-dnsstub.                                                                                                                                                                                                                                                                                                                                                                                            |
| ocats-dnsstub.service.ipFamilyPolicy       | SingleStack                                                 | SingleStack, PreferDualStack, RequireDualStack   | ipFamilyPolicy to be allocated to the ocats-dnsstub service.<br>This value will be referred to as whatever is defined at serviceIpFamilyPolicy.ocatsdnsstubService under global parameters.                                                                                                                                                                                                                       |
| ocats-dnsstub.service.ipFamilies           | [IPv4]                                                      | [IPv4], [IPv6], [IPv4,IPv6], [IPv6,IPv4]         | ipFamilies to be allocated to the ocats-dnsstub service.<br>This value will be referred to as whatever is defined at serviceIpFamilies.ocatsdnsstubService under global parameters.                                                                                                                                                                                                                               |



**Table 3-22 (Cont.) ATS Parameters of the YAML File**

| Parameter                                    | Default Value                                                    | Possible Values                                                                       | Description                                                                                                                                                                                              |
|----------------------------------------------|------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocats-dnsstub.resources.limits.cpu           | 1                                                                | CPU value that is allocated                                                           | Limit to CPU allocated to ocats-dnsstub pod.                                                                                                                                                             |
| ocats-dnsstub.resources.limits.memory        | 1Gi                                                              | Memory value that is allocated (in Gi or mi)                                          | Limit to memory allocated to ocats-dnsstub pod .                                                                                                                                                         |
| ocats-dnsstub.resources.requests.cpu         | 1                                                                | CPU value that is allocated (must be less than or equal to limits)                    | Request of CPU allocation for ocats-dnsstub.                                                                                                                                                             |
| ocats-dnsstub.resources.requests.memory      | 1Gi                                                              | Memory values that is allocated (in Gi or mi) (must be less than or equal to limits)  | Request of memory allocation for ocats-dnsstub.                                                                                                                                                          |
| ocats-ddclientstub.image.repository          | <docker-registryIP:docker-registryport>/ocats/ocats-ddclientstub | <Image repository name:port>/ocats/ocats-ddclientstub                                 | Image repository and port of ocats-ddclientstub.                                                                                                                                                         |
| ocats-ddclientstub.image.tag                 | helm-tag                                                         | Value of tag to be deployed                                                           | Tag of ocats-ddclientstub image.                                                                                                                                                                         |
| ocats-ddclientstub.image.pullPolicy          | Always                                                           | Always, IfNotPresent, Never                                                           | Image pull policy of ocats-ddclientstub image.                                                                                                                                                           |
| ocats-ddclientstub.replicaCount              | 1                                                                | Positive integers                                                                     | Replica count of ocats-ddclientstub.                                                                                                                                                                     |
| ocats-ddclientstub.service.type              | LoadBalancer                                                     | ClusterIP, NodePort, LoadBalancer                                                     | Service type of ocats-ddclientstub.                                                                                                                                                                      |
| ocats-ddclientstub.ipFamilyPolicy            | SingleStack                                                      | SingleStack, PreferDualStack, RequireDualStack                                        | ipFamilyPolicy to be allocated to the ocatsddclientstubService service. This value will be referred to as whatever is defined at serviceIpFamilyPolicy.ocatsddclientstubService under global parameters. |
| ocats-ddclientstub.ipFamilies                | [IPv4]                                                           | [IPv4], [IPv6], [IPv4,IPv6], [IPv6,IPv4]                                              | ipFamilies to be allocated to the ocatsddclientstubService service. This value will be referred to as whatever is defined at serviceIpFamilies.ocatsddclientstubService under global parameters.         |
| ocats-ddclientstub.resources.limits.cpu      | 1                                                                | CPU value that is allocated                                                           | Limit to CPU allocated to ocats-ddclientstub pod.                                                                                                                                                        |
| ocats-ddclientstub.resources.limits.memory   | 1Gi                                                              | Memory value that is allocated (in Gi or mi)                                          | Limit to memory allocated to ocats-ddclientstub pod.                                                                                                                                                     |
| ocats-ddclientstub.resources.requests.cpu    | 1                                                                | CPU value that is allocated (should be less than or equal to limits)                  | Request of CPU allocation for ocats-ddclientstub.                                                                                                                                                        |
| ocats-ddclientstub.resources.requests.memory | 1Gi                                                              | Memory value that is allocated (in Gi or mi) (should be less than or equal to limits) | Request of memory allocation for ocats-ddclientstub.                                                                                                                                                     |
| ocats-ddclientstub.log.level                 | INFO                                                             | INFO, WARN, DEBUG                                                                     | Log level of ddclientstub pod.                                                                                                                                                                           |

Table 3-22 (Cont.) ATS Parameters of the YAML File

| Parameter                                                   | Default Value                                                             | Possible Values                                                                       | Description                                                                                                                                                                                                           |
|-------------------------------------------------------------|---------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocats-ddclientstub.kafka_broker                             | "kafka-broker-0.kafka-broker.ddkafkanamespace.svc.cluster.local:9092"     | Kafka broker fqdn and port                                                            | Kafka broker fqdn or port for ddClientStub.                                                                                                                                                                           |
| ocats-ddclientstub.string_topic_name                        | "string_topic"                                                            | String topic                                                                          | ddClientStub string topic name.                                                                                                                                                                                       |
| ocats-ddclientstub.json_topic_name                          | "json_topic"                                                              | Json topic                                                                            | ddClientStub json topic name.                                                                                                                                                                                         |
| ocats-scpglbratelimitstub.image.repository                  | <docker-registry IP:docker-registry port>/ocats/ocats-scpglbratelimitstub | <Image repository name:port>/ocats/ocats-scpglbratelimitstub                          | Image repository and port of ocats-scpglbratelimitstub.                                                                                                                                                               |
| ocats-scpglbratelimitstub.image.tag                         | helm-tag                                                                  | Value of tag to be deployed                                                           | Tag of ocats-scpglbratelimitstub.                                                                                                                                                                                     |
| ocats-scpglbratelimitstub.image.pullPolicy                  | Always                                                                    | Always, IfNotPresent, Never                                                           | Image pull policy of ocats-scpglbratelimitstub.                                                                                                                                                                       |
| ocats-scpglbratelimitstub.replicaCount                      | 1                                                                         | Positive integers                                                                     | Replica count of ocats-scpglbratelimitstub.                                                                                                                                                                           |
| ocats-scpglbratelimitstub.service.type                      | ClusterIP                                                                 | ClusterIP, NodePort, LoadBalancer                                                     | Service type of ocats-scpglbratelimitstub.                                                                                                                                                                            |
| ocats-scpglbratelimitstub.service.ipFamilyPolicy            | SingleStack                                                               | SingleStack, PreferDualStack, RequireDualStack                                        | ipFamilyPolicy to be allocated to the ocatsscpglbratelimitstubService.<br><br>This value will be referred to as whatever is defined at serviceIpFamilyPolicy.ocatsscpglbratelimitstubService under global parameters. |
| ocats-scpglbratelimitstub.service.ipFamilies                | [IPv4]                                                                    | [IPv4], [IPv6], [IPv4,IPv6], [IPv6,IPv4]                                              | ipFamilies to be allocated to the ocatsscpglbratelimitstubService.<br><br>This value will be referred to as whatever is defined at serviceIpFamilies.ocatsscpglbratelimitstubService under global parameters.         |
| ocats-scpglbratelimitstub.deployment.customExtension.labels | {}                                                                        | Label of node                                                                         | Node labels for node allocation during deployment.                                                                                                                                                                    |
| ocats-scpglbratelimitstub.resources.limits.cpu              | 1                                                                         | CPU value that is allocated                                                           | Limit to CPU allocated to ocats-scpglbratelimitstub.                                                                                                                                                                  |
| ocats-scpglbratelimitstub.resources.limits.memory           | 1Gi                                                                       | Memory values that is allocated (in Gi or mi)                                         | Limit to memory allocated to ocats-scpglbratelimitstub.                                                                                                                                                               |
| ocats-scpglbratelimitstub.resources.requests.cpu            | 1                                                                         | CPU value that is allocated (should be less than or equal to limits)                  | Request of CPU allocation for ocats-scpglbratelimitstub.                                                                                                                                                              |
| ocats-scpglbratelimitstub.resources.requests.memory:        | 1Gi                                                                       | Memory value that is allocated (in Gi or mi) (should be less than or equal to limits) | Request of memory allocation for ocats-scpglbratelimitstub.                                                                                                                                                           |

**Table 3-22 (Cont.) ATS Parameters of the YAML File**

| Parameter                                   | Default Value                                                | Possible Values                                                              | Description                                                                                                                                                                                 |
|---------------------------------------------|--------------------------------------------------------------|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocats-scpglbratelimitstub.minreplicas       | 1                                                            | Positive integer                                                             | Minimum replicas of ocats-scpglbratelimitstub.                                                                                                                                              |
| ocats-scpglbratelimitstub.maxreplicas       | 1                                                            | Positive integer                                                             | Maximum replicas of ocats-scpglbratelimitstub.                                                                                                                                              |
| ocats-scpglbratelimitstub.maxPdbUnavailable | 1                                                            | Positive integer                                                             | -                                                                                                                                                                                           |
| ocats-scpglbratelimitstub.log.level         | INFO                                                         | INFO, WARN, DEBUG                                                            | Log level of ocats-scpglbratelimitstub.                                                                                                                                                     |
| ocats-pystub.image.repository               | <docker-registry IP:docker-registry port>/ocats/ocats-pystub | <Image repository name:port>/ocats/ocats-pystub                              | Image repository and port of ocats-pystub.                                                                                                                                                  |
| ocats-pystub.image.tag                      | helm-tag                                                     | Value of tag to be deployed                                                  | Tag of ocats-pystub.                                                                                                                                                                        |
| ocats-pystub.image.pullPolicy               | Always                                                       | Always, IfNotPresent, Never                                                  | Image pull policy of ocats-pystub.                                                                                                                                                          |
| ocats-pystub.replicaCount                   | 1                                                            | Positive integers                                                            | Replica count of ocats-pystub.                                                                                                                                                              |
| ocats-pystub.service.type                   | ClusterIP                                                    | ClusterIP, NodePort, LoadBalancer                                            | Service type of ocats-pystub                                                                                                                                                                |
| ocats-pystub.service.ports.https.port       | 8443                                                         | port number                                                                  | Indicates the port number to allocate for HTTPS to ocats-pystub.                                                                                                                            |
| ocats-pystub.service.ports.http.port        | 8080                                                         | port number                                                                  | Indicates the port number to allocate for HTTP to ocats-pystub.                                                                                                                             |
| ocats-pystub.service.ipFamilyPolicy         | SingleStack                                                  | SingleStack, PreferDualStack, RequireDualStack                               | Indicates the allocation of "ipFamilyPolicy" to pystub services. This value will be referenced from whatever is defined under "serviceIpFamilyPolicy.stubService" within global parameters. |
| ocats-pystub.service.ipFamilies             | [IPv4]                                                       | [IPv4], [IPv6], [IPv4,IPv6], [IPv6,IPv4]                                     | Indicates the allocation of "ipFamilies" to pystub services. This value will be referenced from whatever is defined under "serviceIpFamilies.stubService" within global parameters.         |
| RESPONSE_FROM_HEADER                        | true                                                         | true, false                                                                  | When true pystub returns podname.                                                                                                                                                           |
| ocats-pystub.resources.limits.cpu           | 1                                                            | CPU value that is allocated                                                  | Indicates the CPU allocation limit for ocats-pystub.                                                                                                                                        |
| ocats-pystub.resources.limits.memory        | 1Gi                                                          | Memory values allocated in Gi or Mi.                                         | Indicates the memory allocation limit for ocats-pystub.                                                                                                                                     |
| ocats-pystub.resources.requests.cpu         | 1                                                            | CPU value allocated (should be less than or equal to limits).                | Indicates the CPU allocation request for ocats-pystub.                                                                                                                                      |
| ocats-pystub.resources.limits.memory        | 1Gi                                                          | Memory value allocated (in Gi or Mi) should be less than or equal to limits. | Indicates the memory allocation request for ocats-pystub.                                                                                                                                   |
| ausf1.service.name:*                        | ausf1svc                                                     | Service name of ausf1                                                        | Indicates the service name allocated to ausf1.                                                                                                                                              |
| ausf1.deploymentName:*                      | ausf1                                                        | Deployment name of ausf1                                                     | Indicates the deployment name allocated to ausf1.                                                                                                                                           |

**Note**

"" indicates that all NF stubs will follow the same pattern.

### 3.6.1.5 Pushing the Images to Customer Docker Registry

#### Preparing to Deploy ATS and Stub Pod in Kubernetes Cluster

To deploy ATS and Stub Pods in the Kubernetes Cluster:

1. Click the file to download the CNC SCP ATS package file:

ocats\_ocscp\_csar\_24\_2\_6\_0\_0.pkg

The package contains the following files:

ocats\_ocscp\_csar\_24\_2\_6\_0\_0.zip  
mcafee-gen-ats-csar-24.2.6.log

Unzip the ocats\_ocscp\_csar\_24\_2\_6\_0\_0.zip file to get the following files and folders:

The output of this command is:

```
.
|-- Definitions
| |-- ocats_ocscp_ats_tests.yaml
| |-- ocats_ocscp_cne_compatibility.yaml
| `-- ocats_ocscp.yaml
|-- Files
| |-- ChangeLog.txt
| |-- Helm
| | `-- ocats-ocscp-24.2.6.tgz
| |-- Licenses
| |-- ocats-ddclientstub-24.2.6.tar
| |-- ocats-dnsstub-24.2.6.tar (Docker Image)
| |-- ocats-pystub-24.2.6.tar (Docker Image)
| |-- ocats-scp-24.2.6.tar (Docker Image)
| |-- ocats-scpglbratelimitstub-24.2.6.tar (Docker Image)
| |-- Oracle.cert
| `-- Tests
|-- ocats_ocscp_csar_24_2_6_0_0.zip
|-- ocats_ocscp.mf
|-- Scripts
| |-- ocats_ocscp_custom_serviceaccount_24.2.6.yaml (Template to create
custom service account)
| |-- ocats_ocscp_tests_jenkinsjobs_24.2.6.tgz. ( ocscp_tests and jenkins
jobs folder to be copied if persistent volume is deployed)
| `-- ocats_ocscp_values_24.2.6.yaml (Custom values file for installation)
`-- TOSCA-Metadata
   `-- TOSCA.meta
```

2. Run the following commands in your cluster to load the ATS and stubs docker images, ocats-scp-image-24.2.6.tar, and push it to your registry:

```
docker load --input ocats-scp-24.2.6.tar
docker load --input ocats-dnsstub-24.2.6.tar
docker load --input ocats-pystub-24.2.6.tar
docker load --input ocats-scpglbratelimitstub.tar
docker load --input ocats-ddclientstub-24.2.6.tar
```

3. Run the following command in your cluster to load the ATS image:

```
docker load --input ocats-scp-images-24.2.6.tar
```

4. Run the following commands to push the ATS image to the registry:

```
docker tag ocats/ocats-scp:24.2.6 <local_registry>/ocats/ocatsscp:24.2.6
docker push <local_registry>/ocats/ocats-scp:24.2.6
```

Where, <local\_registry> indicates the registry where you can push the downloaded images.

5. Run the following commands to push the Stub image to the registry:

```
docker tag ocats/ocats-pystub:24.2.6 <local_registry>/ocats/ocats-
pystub:24.2.6
docker push <local_registry>/ocats/ocats-pystub:24.2.6
```

6. Run the following command to push the DNS Stub Image to the registry:

```
docker tag ocats/ocats-dnsstub:24.2.6 <local_registry>/ocats/ocats-
dnsstub:24.2.6
docker push <local_registry>/ocats/ocats-dnsstub:24.2.6
```

7. Run the following command to push the Global Rate Limiting Stub Image to the registry:

```
docker tag ocats/ocats-scpglbratelimitstub:24.2.6 <local_registry>/ocats/
ocats-scpglbratelimitstub:24.2.6
docker push <local_registry>/ocats/ocats-scpglbratelimitstub:24.2.6
```

8. Run the following command to push the Data Director Stub Image to the registry:

```
docker tag ocats/ocats-ddclientstub:24.2.6 <local_registry>/ocats/ocats-
ddclientstub:24.2.6
docker push <local_registry>/ocats/ocats-ddclientstub:24.2.6
```

9. In the **Scripts** folder, extract the following content:

```
ocats-ocscp-values-24.2.6.yaml
ocats-ocscp-custom-serviceaccount-24.2.6.yaml
ocats-ocscp-tests-jenkinsjobs-24.2.6.tgz
```

10. Update the image name and tag in the ocats-ocscp-values-24.2.6.yaml file as required.

### 3.6.1.6 Preinstall Preparation of SCP for SCP-ATS

Complete the following steps before performing an installation:

- When deploying default ATS with role binding, deploy ATS and test stubs in the same namespace as SCP.
- The SCP stub for the Global Egress Rate Limiting feature must be deployed by setting the required Helm parameters as described in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide* to support the Global Egress Rate Limiting test cases.
- In the `ocats_ocscp_values_24.2.6.yaml`, add the following for Prometheus that is required for alert test case:

```
traffic.sidecar.istio.io/excludeInboundPorts: "9090"
```

- If ASM is adding additional XFCC headers, the `certExtractIndex` and `extractIndex` of the `xfccHeaderDecode` value must be `-1`, otherwise `certExtractIndex` and `extractIndex` of `xfccHeaderDecode` value must be `0`.
- If ASM is enabled, for fetching the metrics from Prometheus, a destination rule must be created. In most deployments, Prometheus is kept outside of the service mesh, so a destination rule is required to communicate between a TLS enabled entity (ATS) and a non-TLS entity (Prometheus). The rule can be created as follows:

```
kubectl apply -f - <<EOF
```

```
apiVersion:networking.istio.io/v1alpha3
kind:DestinationRule
metadata:
  name:prometheus-dr
  namespace:ocscp
spec:
  host:oso-prometheus-server.ocscp.svc.cluster.local
  trafficPolicy:
    tls:
      mode:DISABLE
EOF
```

Where,

- name indicates the name of the destination rule.
- namespace indicates where ATS is deployed.
- host indicates the hostname of the Prometheus server.
- FQDN and `interPlmnFqdn` must be the same for both `nfServices` for NRF profile NRF1.  
**Sample**

```
# NRF profiles for primary(Priority=0) and secondary(Priority=1) NRF. Note
that these NRFs needs to be backend DB Synced.
# For Secondary NRF profile always make it priority lesser than First
priority NRF, currently we set secondary NRF priority to 1.
# In case of no secondary NRF user can comment the secondary NRF Profile.
# Service level FQDN's of NRF are from the same namespace as that of SCP,
```

this is put for SCP ATS cases. Otherwise, NRF's can be part of other namespaces or even other k8s clusters.

```

nrfProfiles:
- capacity: 10000
  locality: USEast
  nfInstanceId: 6faf1bbc-6e4a-2828-a507-a14ef8e1bc5a
  nfStatus: REGISTERED
  nfType: NRF
  priority: '0'
  # with rel15 flag is enabled, below mentioned NRF region to be
  specified.
#   nfSetIdList: ["Reg1"]
  # with rel16 flag is enabled, below mentioned NRF set Id to be
  specified.
  nfSetIdList: ["setnrfl1.nrfset.5gc.mnc012.mcc345"]
  # Uncomment below section to configure interPlmnFqdn, plmnList or
  snpnList
  #NRF-Change-3
  interPlmnFqdn: nrf1.5gc.mnc213.mcc410.3gppnetwork.org
  plmnList:
  - mcc: 410
    mnc: 213
  - mcc: 410
    mnc: 214
  #snpnList:
  #- mcc: 345
  # mnc: 445
  # nid: 000007ed9d5
  customInfo:
    preferredNrfForOnDemandDiscovery: true

nfServices:
- capacity: 5000
  #apiPrefix: USEast
  #NRF-Change-4
  fqdn: nrf1svc.scpsvc.svc.cluster.local
  interPlmnFqdn: nrf1svc.scpsvc.svc.cluster.local
  # Sample IP endpoint with all the fields and it is commented out.
  #NRF-Change-5
  #ipEndpoints: [{"ipv4Address": "NRF-IP", "port": "NRF-PORT"}]
  #ipEndpoints: [{"ipv4Address": "10.75.213.56", "port": "31014"}]
  # ATS test cases need 8080 port with FQDN. Hence, in order to run
  ATS cases, below "ipEndpoints" field is left uncommented.
  #NRF-Change-6
  ipEndpoints: [{"port": "8080"}]
  load: 0
  nfServiceStatus: REGISTERED
  scheme: http
  serviceInstanceId: fe137ab7-740a-46ee-aa5c-951806d77b01
  serviceName: nnrf-nfm
  priority: 0
  versions:
  - apiFullVersion: 1.0.0
    apiVersionInUri: v1

```

```

- capacity: 5000
  #apiPrefix: USEast
  #NRF-Change-4
  fqdn: nrf1svc.scpsvc.svc.cluster.local
  interPlmnFqdn: nrf1svc.scpsvc.svc.cluster.local
  # Sample IPEndpoint with all the fields and it is commented out.
  #NRF-Change-5
  #ipEndpoints: [{"ipv4Address": "NRF-IP", "port": "NRF-PORT"}]
  #ipEndpoints: [{"ipv4Address": "10.75.213.56", "port": "31014"}]
  # ATS test cases need 8080 port with FQDN. Hence, in order to run
ATS cases, below "ipEndpoints" field is left uncommented.
  #NRF-Change-6
  ipEndpoints: [{"port": "8080"}]
  load: 0
  nfServiceStatus: REGISTERED
  scheme: http
  serviceInstanceId: fe137ab7-740a-46ee-aa5c-951806d77b02
  serviceName: nnrf-disc
  priority: 0
  versions:
  - apiFullVersion: 1.0.0
    apiVersionInUri: v1

```

```

- capacity: 5000
  #apiPrefix: USEast
  #NRF-Change-4
  fqdn: nrf1svc.scpsvc.svc.cluster.local
  interPlmnFqdn: nrf1.5gc.mnc213.mcc410.3gppnetwork.org
  # Sample IPEndpoint with all the fields and it is commented out.
  #NRF-Change-5
  #ipEndpoints: [{"ipv4Address": "NRF-IP", "port": "NRF-PORT"}]
  #ipEndpoints: [{"ipv4Address": "10.75.213.56", "port": "31014"}]
  # ATS test cases need 8080 port with FQDN. Hence, in order to run
ATS cases, below "ipEndpoints" field is left uncommented.
  #NRF-Change-6
  ipEndpoints: [{"port": "8080"}]
  load: 0
  nfServiceStatus: REGISTERED
  scheme: http
  serviceInstanceId: fe137ab7-740a-46ee-aa5c-951806d77b03
  serviceName: nnrf-oauth2
  priority: 0
  versions:
  - apiFullVersion: 1.0.0
    apiVersionInUri: v1

```

- Ensure SCP is deployed with the following parameters:
  - Make sure that while providing NRF information at the time of SCP deployment, stub NRF details like **nrf1svc** and **nrf2svc** should also be provided at the time of ATS deployment before running these test cases. For example, if the teststub namespace is **scpsvc**, then SCP should have been deployed with primary NRF as **nrf1svc.scpsvc.svc.<clusterDomain>** and secondary NRF as **nrf2svc.scpsvc.svc.<clusterDomain>** for NRF test cases to work.
  - Ensure the **defaultTopologySource** parameter is set to **NRF** in the **ocscp\_values.yaml** file.



- Ensure the `preventiveAuditOnLastNFInstanceDeletion` parameter is set to `false` in the `ocscp_values.yaml` file.
- The number of replicas of all SCP microservices pods must be set to 1 during SCP deployment as ATS is enabled to perform metric validations for metrics obtained from a single pod.
- When you deploy, make sure to define the additional NRF stubs needed for InterSCP cases as `nrfr2l1svc` (preferred NRF of Reg2), `nrfr2l2svc` (non-preferred NRF of Reg2), `nrfr3l1svc` (non-preferred NRF of Reg3), and `nrfr3l2svc` (preferred NRF of Reg3), which are provided in the default custom value file. Also, in the SCP deployment file, ensure that the namespace of all these NRFs is the same as the deployed SCP namespace. `Reg1`, `Reg2`, and `Reg3` are replaced with `setnrfl1.nrfset.5gc.mnc012.mcc345`, `setnrfr1.nrfset.5gc.mnc012.mcc345`, and `setnrfr2.nrfset.5gc.mnc012.mcc345` for Release 16 SCP deployment.
- Ensure the `supportedNRFRegionOrSetIdList` must have `Reg1`, `Reg2`, and `Reg3` for Release 15 SCP deployment or `setnrfl1.nrfset.5gc.mnc012.mcc345`, `setnrfr1.nrfset.5gc.mnc012.mcc345`, and `setnrfr2.nrfset.5gc.mnc012.mcc345` for Release 16 SCP deployment.
- Ensure only `Loc7`, `Loc8`, `Loc9`, and `USEast` should be part of the `servingLocalities` for Release 15 SCP deployment and the `servingScope` for Release 16 SCP deployment.
- Recommended `auditInterval` is 60 seconds and `guardTime` is 10 seconds in the SCP deployment file.
- The regions such as `Reg2` and `Reg3` are the corresponding values for Release 15 SCP deployment, while NRF setIDs such as `servingLocalities` and `setnrfr2.nrfset.5gc.mnc012.mcc345` are the corresponding values for Release 16 SCP deployment. The NRF belonging to either regions or the NRF set IDs's localities must not match with the SCP `servingLocalities` or SCP `servingScope`.
- SCP deployment file should have the attribute `scpToRegisterWithNrfRegions` set to `Reg1` for Release 15 SCP deployment and `setnrfl1.nrfset.5gc.mnc012.mcc345` for Release 16 SCP deployment. For information about Release 15 and Release 16, see 3GPP TS 23.501.
- To run CCA Validation feature tests, see the [Configuring ATS for CCA Test Cases](#) section.
- To enable OAuth support while deploying SCP, see the [Configuring SCP to Run OAuth Test Cases in ATS](#) section.
- To enable alternate resolution service support while deploying SCP, see the [Configuring SCP to Run DNS SRV Test Cases in ATS](#) section.
- To enable mediation support while deploying SCP, see the [Configuring SCP to Run Mediation Test Cases in ATS](#) section.
- To enable `nrfproxy` support, see the [Configuring SCP to Run Model D Test Cases in ATS](#) section.
- To enable load manager support, see the [Configuring SCP to Run LCI Test Cases in ATS](#) section.
- To enable the Global Egress Rate Limiting feature for ATS environment, see the [Updating the Global Egress Rate Limiting Changes in the SCP Deployment File for ATS](#) section.

- By default, the ATS suite runs HTTPS test cases if the "ALL" option is selected, and SCP must be deployed with HTTPS support enabled to support the same. To enable HTTPS for ATS, see the [Enabling HTTPS for ATS, pystubs and Jenkins](#) section.

```
# If ingress gateway is available then set ingressGWAvaliable flag to
true
```

```
# and provide ingress gateway IP and Port in publicSignalingIP and
publicSignalingPort respectively.
```

```
    publicSignalingPort: &publicSignalingPort 8000    #Signaling PORT
    publicSignalingPortHttps: &publicSignalingPortHttps 9443
#Signaling PORT for HTTPS
    # uncomment below lines when deployed with release 16. Also, take a
note that http port for SCP should be same as "publicSignalingPort" of
SCP mentioned above.
    scpInfo:
        scpPrefix: scpPrefix
        scpPorts:
            http: *publicSignalingPort
        #Uncomment below key-value(https) to enable https for ingress
connections for rel16 deployment. this port should be same as
"publicSignalingPortHttps" of SCP mentioned above.
        # https: *publicSignalingPortHttps
        # Note: If this flag is false, then by default all connections to
PNF will be made using http protocol.
        nativeEgressHttpsSupport: false
```

If SCP is deployed with HTTP support, either the single or multiple feature execution option must be selected, excluding all https test cases. Otherwise, make sure in an ASM environment where HTTPS is not enabled; in that case, manually remove the HTTPS-related test cases from the features directory on the ATS pod.

### 3.6.1.7 Preinstallation Preparation for SCP-ATS

Complete the following steps before performing an installation of SCP-ATS.

#### 3.6.1.7.1 Enabling Aspen Service Mesh

To enable Aspen Service Mesh (ASM) for ATS, complete the following procedure:

##### ① Note

By default, this feature is disabled.

1. If ASM is not enabled on the global level for the namespace, run the following command before deploying ATS:

```
kubectl label --overwrite namespace <namespace_name> istio-
injection=enabled
```

Example:

```
kubectl label --overwrite namespace scpsvc istio-injection=enabled
```

2. Add the following annotations in the lbDeployments section of the global section in the ocats\_scp\_values\_24.2.6.yaml file:

```
traffic.sidecar.istio.io/excludeOutboundPorts: "8091"
traffic.sidecar.istio.io/excludeInboundPorts: "8080"
```

Sample file with annotations:

```
lbDeployments:
  labels: {}
  annotations:
    traffic.sidecar.istio.io/excludeOutboundPorts: "8091"
    traffic.sidecar.istio.io/excludeInboundPorts: "8080"
```

3. Add Envoy Filter to enable the XFCC header forwarding by ASM sidecar.  
Envoy Filter for ATS:

```
apiVersion: networking.istio.io/v1alpha3
kind: EnvoyFilter
metadata:
  name: <name>
  namespace: <namespace>
spec:
  workloadSelector:
    labels:
      app: ocats-scp
  configPatches:
    - applyTo: NETWORK_FILTER
      match:
        listener:
          filterChain:
            filter:
              name: "envoy.http_connection_manager"
      patch:
        operation: MERGE
        value:
          typed_config:
            '@type': type.googleapis.com/
            envoy.config.filter.network.http_connection_manager.v2.HttpConnectionManager
            forward_client_cert_details: ALWAYS_FORWARD_ONLY
            use_remote_address: true
            xff_num_trusted_hops: 1
```

Envoy filter to enable the XFCC header forwarding on the application sidecar:

```
apiVersion: networking.istio.io/v1alpha3
kind: EnvoyFilter
metadata:
```

```

    name: <name>
    namespace: <namespace>
  spec:
    workloadSelector:
      labels:
        app.kubernetes.io/instance: ocscp
    configPatches:
      - applyTo: NETWORK_FILTER
        match:
          listener:
            filterChain:
              filter:
                name: "envoy.http_connection_manager"
        patch:
          operation: MERGE
          value:
            typed_config:
              '@type': type.googleapis.com/
envoy.config.filter.network.http_connection_manager.v2.HttpConnectionManage
r
            forward_client_cert_details: ALWAYS_FORWARD_ONLY
            use_remote_address: true
            xff_num_trusted_hops: 1

```

Envoy filter to enable server header pass through on sidecar:

```

apiVersion: networking.istio.io/v1alpha3
kind: EnvoyFilter
metadata:
  name: <name>
  namespace: <namespace>
spec:
  configPatches:
    - applyTo: NETWORK_FILTER
      match:
        listener:
          filterChain:
            filter:
              name: envoy.filters.network.http_connection_manager
      patch:
        operation: MERGE
        value:
          typed_config:
            '@type': type.googleapis.com/
envoy.config.filter.network.http_connection_manager.v2.HttpConnectionManage
r
            server_header_transformation: PASS_THROUGH

```

**Note**

- The sidecar configuration for response timeout or stream timeout should not be applied for any of the SCP microservices.
- For virtual service CRD, when the destinationhost is any SCP microservice, do not configure the timeout value.

**Updating Virtual Services**

Disabling retry attempts in virtual services:

For all SCP and ATS pods in the virtual services, the retry attempt should be set to 0.

```
retries:  
  attempts: 0
```

### 3.6.1.7.2 Enabling Persistent Volume

ATS supports persistent storage to retain ATS historical build execution data, test cases, and one-time environment variable configurations.

To enable persistent storage:

1. Create a PVC and associate it with the ATS pod.
2. Set the **PVEnabled** flag to **true** in the `ocats_ocscp_values_24.2.6.yaml` file.
3. Set **PVClaimName** to PVC that is created for ATS.

```
ocats-scp:  
  PVEnabled: false  
  PVClaimName: "ocats-scp-24.2.6-pvc"
```

**Note**

In the event that Persistent Volume (PV) is enabled, ATS starts up with the parameter values specified in the `ocats_ocscp_values_24.2.6.yaml` file. If the ATS pod is restarted, the PV restores the configuration, ensuring that the new ATS pod will have the same configuration settings as the previous pod.

For more details on Persistent Volume Storage, you can refer to [Persistent Volume for 5G ATS](#).

## 3.6.2 Configuring SCP-ATS and SCP

This section provides information about updating ATS deployment configuration, enabling and disabling stubs, configuring SCP to run test cases, and so on.

**Note**

Make sure to follow the steps mentioned in the [Preinstall Preparation of SCP for SCP-ATS](#) to deploy SCP. For more information on SCP deployment, refer to the *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

### 3.6.2.1 Updating ATS Configuration

The following section covers updating the ATS deployment configuration and ATS input parameter configuration.

#### 3.6.2.1.1 Updating ATS Deployment Configuration

Previously, manual modification of the ATS configuration parameters for New feature and Regression jobs was required in the ATS graphical user interface (GUI). Now, with the introduction of a section "ATS\_Config" in the `ocats_ocscp_values_24.2.6.yaml` file, you can update the values for ATS parameters and then deploy the OCATS\_OCSCP charts using this modified `ocats_ocscp_values_24.2.6.yaml` file. The updated ATS parameters are automatically applied during the deployment process, and the ATS will come up with the configuration as mentioned in the `ocats_ocscp_values_24.2.6.yaml` file.

The `ocats_ocscp_values_24.2.6.yaml` file can be modified to update the ATS parameters according to their environment. To illustrate this, here's an example of how you can update the ATS parameters in the `ocats_ocscp_values_24.2.6.yaml` file:

**Figure 3-14 ATS Deployment Configuration**

```

450
451   extraContainers: USE_GLOBAL_VALUE
452
453   ATS_Config:
454     SELECTED_NF: SCP
455     NF_NAMESPACE: scpsvc
456     CLUSTERDOMAIN: cluster.local
457     DEST_NAMESPACE: scpsvc
458     #Do not add a trailing / at the end of ATS_REGISTRY
459     ATS_REGISTRY: ocsdp-registry.us.oracle.com:5000/ocats
460     AUDIT_INTERVAL: 60
461     GUARDTIME: 10
462     SCPSVCNAME: ocsdp-scp-worker
463     SCP_CONFIGSVNAME: ocsdp-scp-configuration
464     SCP_NOTIFYSVNAME: ocsdp-scp-notification
465     SCPSUBSVNAME: ocsdp-scp-subscription
466     DB_SECRETNAME: appuser-secret
467     MYSQLHOST: mysql.default.svc.cluster.local
468     ATSTUBIMAGE: ocats-pystub:tag
469     ATSTUBCPU: 1
470     ATSTUBMEMORY: 1G
471     SCP_AUDITSVNAME: ocsdp-scp-audit
472     RERUN_COUNT: 2
473     SCPSVCPORT: 8000
474     PROMSVNAME: ocne-prometheus-server.ocne-infra
475     PROMSVCPORT: 80
476     STUBWAITTIME: 300
477     PROMSV_URI: /api/
478     SUBVALIDITYTIME: 120
479     OPENSEARCH_WAIT_TIME: 0
480     RERUNLOGS: false
481     OPENSEARCH_HOST: ocne-opensearch-cluster-master.ocne-infra
482     OPENSEARCH_PORT: 9200
483     #Please add STUB_LOG_COLLECTION value in quotes
484     STUB_LOG_COLLECTION: "no"
485     OPENSEARCH_LOGS: opensearch
486     SCPSVCHTTPSPORT: 9443
487     SCPNRFPROXYSVNAME: ocsdp-scp-nrfproxy
488     KUBERNETES_HOST: kubernetes.default
489     KAFKANAMESPACE: scpsvc
490     SCPDDCLIENTSVNAME: ocats-scpddclientstub
491     SCGPLBRATELIMITSVNAME: ocats-scpglbratelimitstub
492     SCP_CONFIGSVCPORT: 8081
493
494   ocats_descstub:

```

**Note**

Initially, at the time of deployment, you can configure or modify the parameter in the `ocats_ocscp_values_24.2.6.yaml` file or you can also update or modify the parameters post deployment by following the process described in the [Configuring New Feature Pipelines](#) section.

### 3.6.2.1.2 Configuring SCP-ATS for OCI Setup

To leverage the existing infrastructure of Oracle Cloud, SCP which was only deployed on CNE, can now be integrated on the Oracle Cloud Infrastructure (OCI).

#### Creating Secret for Alarm(Alerts)

When deploying ATS within the OCI environment, users are required to provide the following inputs in the form of a Kubernetes secret named `ocats-oci-secret`:

```
user="<your user ocid>"
tenancy="<your tenancy ocid>"
region="<your oci region>"
fingerprint="<fingerprint of your public key>"
key_file="<full path to your private key>"
metric_namespace="<metric_namespace under which all the metrics and alarms of
SUT NF will be captured>"
nf_compartment_id="<Compartment Id of SUT NF>"
```

Run the command to create the secret for alarm or alerts related to test cases:

```
kubectl
  create secret generic ocats-oci-secret --from-
literal=user='<your_user_ocid>'--from-literal=tenancy='<your_tenancy_ocid>'--
from-literal=region='<your_oci_region>'--from-
literal=fingerprint='<fingerprint_of_your_oci_api_public_key>'--from-
literal=metric_namespace='<metric_namespace under which all the metrics and
alarms of SUT NF will be
  captured>'--from-literal=nf_compartment_id='Compartment Id of SUT
NF'--from-file=key_file='<full_path_to_your_oci_api_private_key
  on_the_host_machine_where_you_are_running_this_command>' -n
<namespace>
```

For example,

```
kubectl
  create secret generic ocats-oci-secret --from-
literal=user='ocid1.user.oc1..aaaaaaaajjxlzew3e76aufhdjfhdkfjkl6ea3aaazg7cx
g74ljs5an3a'--from-
literal=tenancy='ocid1.tenancy.oc1..aaaaaaa5oqwziy4bngiebry6letze4hdjskjsdkd
lksurhc6pojwe4wxe34a'--from-literal=region='us-ashburn-1'--from-
literal=fingerprint='79:17:f2:89:76:d6:82:b2:13:b9:1d:9f:ff:92:28:3b'--from-
literal=metric_namespace=scpdemons
  --from-
literal=nf_compartment_id='ocid1.compartment.oc1..aaaaaaa6crdjhkkdkldlxbi7e'
```

```
rwtmo3wa7jy6q6ldjjskddnmitot4smcczgq'--from-file=key_file='/tmp/
oci_api_key.pem'-n scpvc
```

### ATS Deployment Configuration in OCI Setup

Update the values for ATS parameters and then deploy the OCATS\_OCSCP charts using this modified `ocats_ocscp_values_24.2.6.yaml` file. To update the ATS parameters in the `ocats_ocscp_values_24.2.6.yaml` file, see the [Updating ATS Deployment Configuration](#) section.

Modify the `scpMetricVersion` parameter to "v2" in the `ocats_ocscp_values_24.2.6.yaml` file. For more information, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

## 3.6.2.1.3 Updating ATS Input Parameter Configuration

This section provides information about how to modify different services in SCP and configure SCP test cases in ATS.

### 3.6.2.1.3.1 Enabling or Disabling Stubs

By default, all the stubs are enabled.

#### Note

Deploy NRF stubs with port 8080. NRF details of SCP should specify the **ipEndpoints** port as 8080 without any **ipv4Address** field. For example, `ipEndpoints: [{"port": "8080"}]}`.

To enable or disable the stubs or pods, set the variable to `true` or `false`, respectively. You can install the required stubs or pods during `ocats-ocscp` deployments.

The following sample parameters show how the stub is enabled by setting different variables to `true` in the `ocats_ocscp_values_24.2.6.yaml` file:

```
global:
# ***** Sub-Section Start: Custom Extension Global Parameters *****
#*****
ocatsdnsstubService: true
ocatsscpService: true
ocatsscpglbratelimitstubService: true
ocatsddclientstubService: true
ausf1Stubs: true
ausf2Stubs: true
ausf3Stubs: true
ausf4Stubs: true
ausf5Stubs: true
ausf6Stubs: true
ausf7Stubs: true
ausf11Stubs: true
ausf12Stubs: true
ausf13Stubs: true
ausf14Stubs: true
ausf15Stubs: true
```



```
ausf16Stubs: true
ausf21Stubs: true
ausf22Stubs: true
ausf23Stubs: true
chf1Stubs: true
chf2Stubs: true
nrf1Stubs: true
nrf2Stubs: true
nrfr2l1Stubs: true
nrfr2l2Stubs: true
nrfr3l1Stubs: true
nrfr3l2Stubs: true
pcf1Stubs: true
pcf1cStubs: true
pcf2Stubs: true
pcf3Stubs: true
pcf4Stubs: true
pcf5Stubs: true
pcf6Stubs: true
pcf7Stubs: true
pcf8Stubs: true
pcf10Stubs: true
pcf11Stubs: true
pcf12Stubs: true
pcf13Stubs: true
pcf14Stubs: true
pcf15Stubs: true
pcf16Stubs: true
pcf21Stubs: true
pcf22Stubs: true
pcf23Stubs: true
pcf24Stubs: true
pcf25Stubs: true
pcf26Stubs: true
pcf27Stubs: true
pcf28Stubs: true
scp1Stubs: true
scp2Stubs: true
scp3Stubs: true
scp11Stubs : true
scp12Stubs: true
scp51Stubs: true
scp52Stubs: true
scp61Stubs: true
smf1Stubs: true
smf2Stubs: true
smf3Stubs: true
smf4Stubs: true
smf5Stubs: true
smf11Stubs: true
udm1Stubs: true
udm2Stubs: true
udm3Stubs: true
udm4Stubs: true
udm5Stubs: true
udm22Stubs: true
```

```
udm23Stubs: true
udm33Stubs: true
udm21Stubs: true
udm31Stubs: true
udm32Stubs: true
udr1Stubs: true
udr2Stubs: true
scp51svcxxxxStubs: true
scp52svcxxxxStubs: true
scp61svcxxxxStubs: true
sepp1Stubs: true
sepp2Stubs: true
sepp3Stubs: true
nef1Stubs: true
nef2Stubs: true
nef3Stubs: true
nef4Stubs: true
nef5Stubs: true
nef6Stubs: true
nef7Stubs: true
nef8Stubs: true
gen1Stubs: true
gen2Stubs: true
```

**Note**

Replica count of 'scp51svcxxxx' 'scp52svcxxxx' 'scp61svcxxxx' stubs must be set to Zero.

#### 3.6.2.1.3.1.1 Modifying IpFamilyPolicy or IpFamilies of Stubs

The deployment of all stubs can adhere to the following:

- If IpFamilyPolicy is set to "SingleStack," then the value of IpFamilies can either be [IPv4] or [IPv6] only.
- If IpFamilyPolicy is set as "PreferDualStack" or "RequireDualStack", then the values of IpFamilies can either be [IPv4,IPv6] or [IPv6,IPv4] only.

**Note**

All the pyStubs should be deployed with the same combination of IpFamilyPolicy and IpFamilies.

#### 3.6.2.1.3.2 Configuring ATS YAML File for Deployment

##### **Umbrella Chart**

Helm charts contain different charts that are referred to as subcharts through their dependencies section in the `requirements.yaml` file. When a chart is created for the purpose of grouping related subcharts or services, such as composing a whole application or deployment, it is known as umbrella chart.

Perform the following procedure to create umbrella charts and add stubs to the umbrella charts:

1. To add stubs to the umbrella chart, do the following:
  - a. Below parameters can be updated to `ocats_ocscp_values_24.2.6.yaml` file:

**ocats-scp**

```
ocats-scp:
  image:
    repository: cgbu-ocscp-dev-docker.dockerhub-phx.oci.oraclecorp.com/
ocats/ocats-scp
    tag: 24.2.6
    pullPolicy: Always
  replicaCount: 1
  resources:
    limits:
      cpu: 3
      memory: 23Gi
      #ephemeral-storage: 4Gi
    requests:
      cpu: 3
      memory: 3Gi
```

**ocats-dnsstub**

```
ocats-dnsstub:
  image:
    repository: cgbu-ocscp-dev-docker.dockerhub-phx.oci.oraclecorp.com/
ocats/ocats-dnsstub
    tag: helm-tag
    pullPolicy: Always
  replicaCount: 1
  service:
    customExtension:
      labels: {}
      annotations: {}
    type: ClusterIP
    port: 53

  deployment:
    customExtension:
      labels: {}
      annotations: {}

  resources:
    limits:
      cpu: 1
      memory: 1Gi
    requests:
      cpu: 1
      memory: 1Gi
```

**ocats-pystub**

```
ocats-pystub:
  image:
    repository: cgbu-ocscp-dev-docker.dockerhub-phx.oci.oraclecorp.com/
```

```

ocats/ocats-pystub
  tag: helm-tag
  pullPolicy: Always
  replicaCount: 1
  resources:
    limits:
      cpu: 1
      memory: 1Gi
    requests:
      cpu: 1
      memory: 1Gi
  ausf1:
    service:
      name: ausf1svc
      type: ClusterIP
      ports:
        port: 8080
    deploymentName: ausf1
  ausf2:
    service:
      name: ausf2svc
      type: ClusterIP
      ports:
        port: 8080
    deploymentName: ausf2

```

### **ocats-scpglbratelimitstub**

```

ocats-scpglbratelimitstub:
  image:
    repository: <docker-registry IP:docker-registry port>/ocats/ocats-
scpglbratelimitstub
    tag: helm-tag
    pullPolicy: Always
    replicaCount: 1
  service:
    type: ClusterIP
  deployment:
    customExtension:
      labels: {}
      annotations: {}
  resources:
    limits:
      cpu: 1
      memory: 1Gi
    requests:
      cpu: 1
      memory: 1Gi
  minreplicas: 1
  maxreplicas: 1
  maxPdbUnavailable: 11:27
ocats-ddclientstub:
  image:
    repository: <docker-registry IP:docker-registry port>/ocats/ocats-
ddclientstub

```

```

    tag: helm-tag
    pullPolicy: Always
    replicaCount: 1
    service:
      type: LoadBalancer
    resources:
      limits:
        cpu: 1
        memory: 1Gi
        #ephemeral-storage: 55Mi
      requests:
        cpu: 1
        memory: 1Gi
        #ephemeral-storage: 55Mi
    log:
      level: INFO
    extraContainers: USE_GLOBAL_VALUE

    kafka_broker: "kafka-broker1-0.kafka-
broker1.ddkafkanamespace.svc.cluster.local:9092"
    string_topic_name: "string_topic"
    json_topic_name: "json_topic"

```

### ocats-dnsstub

```

ocats-dnsstub:
  image:
    repository: <docker-registry IP:docker-registry port>/ocats/ocats-
dnsstub
    tag: helm-tag
    pullPolicy: Always
    replicaCount: 1
    service:
      customExtension:
        labels: {}
        annotations: {}
      type: ClusterIP
      port: 53

  deployment:
    customExtension:
      labels: {}
      annotations: {}

  resources:
    limits:
      cpu: 1
      memory: 1Gi
    requests:
      cpu: 1
      memory: 1Gi
    extraContainers: USE_GLOBAL_VALUE

```

### 3.6.2.1.3.3 Dual Stack Support

Using the dual stack mechanism, applications or NFs can establish connections with pods and services in a Kubernetes cluster using IPv4 or IPv6 or both simultaneously.

With the introduction of the Dual Stack IPv6 support feature, there will be two categories of features performing the same tests. However, they are categorized differently based on the type of endpoint the stack supports (single endpoint or multiple endpoints). It is important to consider the IP endpoint support of the stack while running these tests.

For example:

- **SCP\_22.3.0\_BugFixes\_MultipleIpEndpoint\_P0.feature:** Shall run on stacks supporting multiple endpoints (IPv4 and IPv6)
- **SCP\_22.3.0\_BugFixes\_SingleIpEndpoint\_P0.feature:** Shall run on stacks supporting single endpoints (IPv4 or IPv6)

Feature files with "SingleIpEndpoint" in the name:

These test cases run on a single IP stack setup or a dual IP stack setup, where ipFamilies should be [IPv4] or [IPv6] in the ATS deployment file.

Feature files with "MultipleIpEndpoint" in name:

These test cases run only on a dual IP stack setup, where ipFamilies should be [IPv4, IPv6] or [IPv6, IPv4] in the ATS deployment file.

All other feature files can run on both setups.

### 3.6.2.1.3.4 Enabling HTTPs for ATS, pystubs and Jenkins

Perform the following procedure to enable HTTPs for ATS. These steps can be avoided if your environment does not require HTTPS by adhering to the [Preinstall Preparation of SCP for SCP-ATS](#).

Ensure that you have the below file generated before you proceed with deployment:

- Private key
  - Client certificate
  - Certificate Authority Root certificate
1. To enable HTTPS for ATS, run the following command to create the Kubernetes secret:

```
kubectl create secret generic ocats-scp-secret
  --from-file=rsa_private_key_pkcs1_client.pem --from-file=client.pem
  --from-file=caroot.pem
  --from-file=jenkinsserver.jks -n scpsvc
```

#### Note

Name of the secret, private key, client certificate, and CA root certificate must be the same as mentioned in the above mentioned command.

- a. Uncomment the private key, client certificate, and CA root certificate in the `ocats_ocscp_values.yaml` as follows:

Existing value:

```
#certificates:
# cert_secret_name: "ocats-scp-secret"
# ca_cert: "caroot.pem"
# client_cert: "client.pem"
# private_key: "rsa_private_key_pkcs1_client.pem"
# jks_file: "jenkinsserver.jks"
# jks_password: "123456" #This is the password given to the jks file
while creation.
```

Updated values

```
certificates:
  cert_secret_name: "ocats-scp-secret"
  ca_cert: "caroot.pem"
  client_cert: "client.pem"
  private_key: "rsa_private_key_pkcs1_client.pem"
  jks_file: "jenkinsserver.jks"
  jks_password: "123456" #This is the password given to the jks file
while creation.
```

- b. Set the `atsGuiTLSEnabled` and `atsCommunicationTLSEnabled` parameters to true in `ocats_ocscp_values.yaml`, as shown below:

Generate Certificate

```
cat >>$SERVER_EXT<<EOF
authorityKeyIdentifier=keyid,issuer
basicConstraints=CA:FALSE
keyUsage = digitalSignature, nonRepudiation, keyEncipherment,
dataEncipherment
extendedKeyUsage = serverAuth, clientAuth
subjectAltName = @alt_names

[alt_names]
IP.1 = 127.0.0.1
# replace IP.2 with local setup IP when enabling https Gui for jenkins
IP.2 = 10.75.226.134
DNS.1 = *.${NAMESPACE}.${COMMON_NAME}
DNS.2 = localhost
EOF
```

- c. Make changes to the `SERVER_EXT`. Set the `IP.2` value as the local setup IP as mentioned below:

Updated Value

```
atsGuiTLSEnabled: true
atsCommunicationTLSEnabled: true
```

- d. Deploy ATS pod with above mentioned changes.

2. To enable HTTPS for pystubs, run the following command to create the Kubernetes secret:

```
kubectl create secret generic ocats-pystub-secret
--from-file=rsa_private_key_pkcs1_server.pem --from-file=server.pem
--from-file=caroot.pem -n
scpsvc
```

**Note**

Name of the secret, private key, client certificate, and CA root certificate must be the same as mentioned in the above mentioned command.

- a. Run the following command to create role and role binding for GET access to the pystub pod:

```
kubectl create role scpsvc-pystub-scp-role --verb=get --
resource=secrets -n scpsvc
kubectl create rolebinding --role=scpsvc-pystub-scp-role scpsvc-pystub-
scp-rolebinding --serviceaccount=scpsvc:default -n scpsvc
```

- b. Uncomment the private key, server certificate, and CA root certificate in the ocats\_pystub\_values.yaml file as follows:

Existing value:

```
#certificates:
# cert_secret_name: "ocats-pystub-secret"
# ca_cert: "caroot.pem"
# client_cert: "server.pem"
# private_key: "rsa_private_key_pkcs1_server.pem"
```

Updated values in ocats\_ocscp\_values\_24.2.6.yaml file.

```
certificates:
cert_secret_name: "ocats-pystub-secret"
ca_cert: "caroot.pem"
client_cert: "server.pem"
private_key: "rsa_private_key_pkcs1_server.pem"
```

- c. Deploy pystub pods with above mentioned changes.

### 3.6.2.1.3.5 Configuring SCP to Run OAuth Test Cases in ATS

By default, the ATS suite runs oauth test cases if the "ALL" option is selected, and SCP must be deployed with oauth support enabled to support the same.

```
# Enable nrfproxy-oauth service (only for Rel16)
nrfProxyAuthService: true
```

If SCP is deployed without oauth support, either the single or multiple feature execution option must be selected, excluding all oauth test cases, or these options must be manually removed from the feature directory on the ATS pod.



### 3.6.2.1.3.6 Configuring ATS for CCA Test Cases

Run CCA Validation feature tests with ATS.

- Enable HTTPS to run these feature tests.
- Generate 9 client certificates (using the `gen_certificates.sh` script) before running the feature tests and write these certificates inside the `ocats-scp-secret` kubernetes secret. This script is to be executed when SCP-ATS deployments have IP families such as [IPv4] or [IPv4, IPv6]. The following lists the sample SANs that must be used while creating certificates:

— **client2.pem**

```
[alt_names]
IP = 10.75.213.1

DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}

URI.1 = urn:uuid:11111111-aaaa-aaaa-aaaa-111111111177

URI.2 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443

URI.3 = https://10.75.213.1:443
```

— **client3.pem**

```
[alt_names]
URI.1 = urn:uuid:11111111-aaaa-aaaa-aaaa-111111111177
```

— **client4.pem**

```
[
alt_names]
DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}
```

— **client5.pem**

```
[alt_names]
IP = 10.75.213.1
```

— **client6.pem**

```
[alt_names]
URI.1 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443
```

---

— **client7.pem**

```
[alt_names]
URI.1 = https://10.75.213.1:443
```

— **client8.pem**

```
[alt_names]
IP = 10.75.213.1
DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}
URI.1 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443
URI.2 = https://10.75.213.1:443
```

— **client9.pem**

```
[alt_names]
IP.1 = 10.75.213.2
IP.2 = 10.75.213.3
IP.3 = 10.75.213.4
IP.4 = 10.75.213.5
IP.5 = 10.75.213.6
IP.6 = 10.75.213.7
IP.7 = 10.75.213.8
IP.8 = 10.75.213.9
IP.9 = 10.75.213.10
IP.10 = 10.75.213.11
IP.11 = 10.75.213.1
DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}
URI.1 = urn:uuid:11111111-aaaa-aaaa-aaaa-111111111177
URI.2 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443
URI.3 = https://10.75.213.10:443
```

— **client10.pem**

```
[alt_names]
IP = 10.75.213.1
DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}
URI.1 = urn:uuid:11111111-aaaa-aaaa-aaaa-111111111177
URI.2 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443
URI.3 = https://10.75.213.10:443
URI.4 = https://10.75.213.2:443
URI.5 = https://10.75.213.3:443
URI.6 = https://10.75.213.4:443
URI.7 = https://10.75.213.5:443
URI.8 = https://10.75.213.6:443
URI.9 = https://10.75.213.7:443
URI.10 = https://10.75.213.8:443
URI.11 = https://10.75.213.1:443
```

- Generate 9 client certificates before running the feature tests, and write these certificates inside the ocats-scp-secret Kubernetes secret. Run the `gen_certificates_ipv6.sh` script when SCP-ATS deployment is either [IPv6] or [IPv6,IPv4].  
The following lists the sample SANs that must be used while creating certificates:

- **client2.pem**

```
[alt_names]
IP = 2001:db8:85a3:0:0:8a2e:370:7334

DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}

URI.1 = urn:uuid:11111111-aaaa-aaaa-aaaa-11111111177

URI.2 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443

URI.3 = https://[2001:db8:85a3:0:0:8a2e:370:7334]:443
```

- **client3.pem**

```
[alt_names]
URI.1 = urn:uuid:11111111-aaaa-aaaa-aaaa-11111111177
```

- **client4.pem**

```
[
alt_names]
DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}
```

- **client5.pem**

```
[alt_names]
IP = 2001:db8:85a3:0:0:8a2e:370:7334
```

- **client6.pem**

```
[alt_names]
URI.1 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443
```

- **client7.pem**

```
[alt_names]
URI.1 =https://[2001:db8:85a3:0:0:8a2e:370:7334]:443
```

- **client8.pem**

```
[alt_names]
IP = 2001:db8:85a3:0:0:8a2e:370:7334
DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}
```

```
URI.1 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443
URI.2 = https://[2001:db8:85a3:0:0:8a2e:370:7334]:443
```

#### — client9.pem

```
[alt_names]
IP.1 = 2002:db8:85a3:0:0:8a2e:370:7334
IP.2 = 2003:db8:85a3:0:0:8a2e:370:7334
IP.3 = 2004:db8:85a3:0:0:8a2e:370:7334
IP.4 = 2005:db8:85a3:0:0:8a2e:370:7334
IP.5 = 2006:db8:85a3:0:0:8a2e:370:7334
IP.6 = 2007:db8:85a3:0:0:8a2e:370:7334
IP.7 = 2008:db8:85a3:0:0:8a2e:370:7334
IP.8 = 2009:db8:85a3:0:0:8a2e:370:7334
IP.9 = 2010:db8:85a3:0:0:8a2e:370:7334
IP.10 = 2011:db8:85a3:0:0:8a2e:370:7334
IP.11 = 2001:db8:85a3:0:0:8a2e:370:7334
DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}
URI.1 = urn:uuid:11111111-aaaa-aaaa-aaaa-111111111177
URI.2 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443
URI.3 = https://[2010:db8:85a3:0:0:8a2e:370:7334]:443
```

#### — client10.pem

```
[alt_names]
IP = 2001:db8:85a3:0:0:8a2e:370:7334
DNS.1 = chf1svc.${NAMESPACE}.${COMMON_NAME}
URI.1 = urn:uuid:11111111-aaaa-aaaa-aaaa-111111111177
URI.2 = https://chf1svc.${NAMESPACE}.${COMMON_NAME}:443
URI.3 = https://[2010:db8:85a3:0:0:8a2e:370:7334]:443
URI.4 = https://[2002:db8:85a3:0:0:8a2e:370:7334]:443
URI.5 = https://[2003:db8:85a3:0:0:8a2e:370:7334]:443
URI.6 = https://[2004:db8:85a3:0:0:8a2e:370:7334]:443
URI.7 = https://[2005:db8:85a3:0:0:8a2e:370:7334]:443
URI.8 = https://[2006:db8:85a3:0:0:8a2e:370:7334]:443
URI.9 = https://[2007:db8:85a3:0:0:8a2e:370:7334]:443
URI.10 = https://[2008:db8:85a3:0:0:8a2e:370:7334]:443
URI.11 = https://[2001:db8:85a3:0:0:8a2e:370:7334]:443
```

### 3.6.2.1.3.7 Updating the Global Egress Rate Limiting Changes in the SCP Deployment File for ATS

Perform the following procedure to enable the Global Egress Rate Limiting feature for ATS environment.

1. In the SCP custom-values.yaml file, update the following:
  - federation.remoteScpOne.fqdnOrIp: FQDN of the scpglbratelimitstub pod.
  - federation.remoteScpOne.clusterName: Coherence Cluster Name of global rate limit Stub [Example: scpstub-coherence-cluster].
  - federation.remoteScpOne.nfInstanceId: NFInstanceId of global rate limit Stub [Example: 2faf1bbc-6e4a-4454-a507-a14ef8e1bc22].

### 3.6.2.1.3.8 Configuring SCP to Run DNS SRV Test Cases in ATS

By default, the ATS suite runs alternate resolution (DNS SRV) if the "ALL" option is selected, and SCP must be deployed with alternate resolution service support enabled in order to support the same.

```
# Enable DNS SRV Alternate Routing Feature
dnsSRVAlternateRouting: false
```

If SCP is deployed without alternate resolution support, either single or multiple feature execution options must be selected, excluding all DNS SRV test cases, or these options must be manually removed from the feature directory on the ATS pod.

### 3.6.2.1.3.9 Configuring SCP to Run Mediation Test Cases in ATS

By default, the ATS suite runs Mediation test cases if the "ALL" option is selected, and SCP must be deployed with Mediation support enabled to support the same.

```
# Enable mediation service
mediationService: false
```

If SCP is deployed without the Mediation support, then either a single or multiple feature execution option can be selected, excluding all Mediation test cases, or these options must be manually removed from the feature directory on the ATS pod.

### 3.6.2.1.3.10 Configuring SCP to Run Model D Test Cases in ATS

By default, the ATS suite runs delegated discovery ( Model D) if the "ALL" option is selected, and SCP must be deployed with nrfproxy support enabled to support the same.

```
# Enable Nrf Proxy service (only for Rel16)
nrfProxyService: false
```

If SCP is deployed without nrfproxy support, either single or multiple feature execution options must be selected, excluding all Model D test cases, or these options must be manually removed from the feature directory on the ATS pod.

### 3.6.2.1.3.11 Configuring ATS for Traffic Feed Test Cases

1. To run Traffic Feed ATS testcases, install the kafka broker.
2. In the ATS deployment file, update the following parameters:
  - kafka\_broker: <kafka broker host>:<kafka broker host> (Example, "kafka-broker-0.kafka-broker.scpsvc.svc.cluster.local:9092")
  - string\_topic\_name: <topic name for string serialization> (Example, "string\_topic")
  - json\_topic\_name: <topic name for json serialization> (Example, "json\_topic")
3. In the global.yaml file, update the following parameters:
  - global\_traffic\_feed\_key\_Serializer: <key serialization> (Example, string)
  - global\_traffic\_feed\_value\_Serializer: <value serialization> (Example, string)
  - global\_traffic\_feed\_topic\_name: <topic name for selected serialization> (Example, string\_topic)

- `global_traffic_feed_bootstrap_server_host`: <kafka broker host> (Example, `kafka-broker1-0.kafka-broker1.scpsvc.svc.cluster.local`)
- `global_traffic_feed_bootstrap_server_port`: <kafka broker port> (Example, 9092)  
For more information on `global.yaml` file, see [ATS Testcase Parametrization on User Input](#).

For installation of the Data Director Kafka broker, perform the following:

- Update the `ocnadd-custom-values.yaml` as documented in the Data Director Installation and Upgrade Guide.
- Disable all services apart from `ocnaddkafka` by marking them as false.
- Keep `ocnaddkafka` as true.

For more information, see *Oracle Communications Network Analytics Data Director Installation and Upgrade Guide*.

#### Note

Kafka broker should be deployed with 3 partitions under `string_topic`.

### 3.6.2.1.3.12 Configuring SCP to Run LCI Test Cases in ATS

By default, the ATS suite runs load manager test cases if the "ALL" option is selected, and SCP must be deployed with load manager support enabled to support the same.

```
# Enable load-manager service (only for Rel16)
loadManagerService: true
```

If SCP is deployed without load manager support, either the single or multiple feature execution option must be selected, excluding all load manager test cases, or these options must be manually removed from the feature directory on the ATS pod.

## 3.6.3 Deploying ATS and Stub in the Kubernetes Cluster

This section provides information about how to deploy ATS and stubs.

To deploy ATS in the Kubernetes Cluster:

#### Note

Deploy ATS, SCP, and stubs in the same namespace.

1. Ensure the `ocats-ocscp-values-24.2.6.yaml` file has been updated with correct repository, image tag, and parameters as per requirements.
2. In the Files or Helm folder, find the `ocats-ocscp` charts for version 23.3.0, which have to be used for installation.
3. Run the following command to deploy ATS:

```
helm install ocats-ocscp-24.2.6.tgz --name <release_name> --namespace
<namespace_name> -f ocats-ocscp-values-24.2.6.yaml
```

Example:

```
helm install ocats-ocscp-24.2.6.tgz --name ocats-ocscp --namespace scpsvc-f
ocats-ocscp-values-24.2.6.yaml
```

#### Note

Update image name, tag, service name, and deployment name in ocats-pystub of the ocats\_pystub\_values\_24.2.6.yaml file before deploying.

4. Verify whether all stub pods are up and running in the deployed namespace as updated in the ocats\_ocscp\_values\_24.2.6.yaml.

## 3.6.4 Post Installation and Deployment Steps

This section describes the post-installation steps for SCP.

### 3.6.4.1 Verifying ATS Deployment

Run the following command to verify the ATS deployment status:

```
helm status <release_name>
```

#### Note

If ATS is deployed in the service mesh environment, the **Ready** field for pods displays 2/2.

The following image displays that the deployment is complete because the **STATUS** field has changed to deployed.

**Figure 3-15** Checking ATS Helm Release and ATS related Pod Status

```
[opc@ocscp-ocncc-oci-phx-bell-bastion-01 ~]$ helm status ocats-ocscp -n scp-46754295-dev
NAME: ocats-ocscp
LAST DEPLOYED: Mon Oct 16 08:45:05 2023
NAMESPACE: scp-46754295-dev
STATUS: deployed
REVISION: 1
TEST SUITE: None
NOTES:
# Copyright 2020 (C), Oracle and/or its affiliates. All rights reserved.

Thank you for installing ocats-ocscp.

Your release is named ocats-ocscp , Release Revision: 1.
To learn more about the release, try:

$ helm status ocats-ocscp
$ helm get ocats-ocscp
[opc@ocscp-ocncc-oci-phx-bell-bastion-01 ~]$ kubectl get pods -n scp-46754295-dev | grep "ocats\|udr1"
ocats-ocscp-ocats-ddclientstub-7f894b65c9-gjqlm      2/2      Running    0          26h
ocats-ocscp-ocats-dnsstub-5d5fcfcf9f-bp8w2          2/2      Running    0          26h
ocats-ocscp-ocats-scp-6f44bbdfdc-wkbpq             2/2      Running    0          26h
ocats-ocscp-ocats-scpglbratelimitstub-55d7dc5b74-2njzn 2/2      Running    0          26h
udr1-59d4d694c4-gzqqc                               2/2      Running    0          26h
[opc@ocscp-ocncc-oci-phx-bell-bastion-01 ~]$
```


### 3.6.4.2 Modifying the scpc-alternate-resolution Microservice

Perform the following procedure to modify the scpc-alternate-resolution microservice to point to the DNS Stub for the Alternate Routing based on the Domain Name System (DNS) Service Record (SRV) Records feature.

1. Capture the cluster IP of DNS Stub service.

By default, scpc-alternate-resolution points to CoreDNS and displays the following settings in the `ocscp_values.yaml` deployment file.

**Figure 3-16 CoreDNS**



```

terminationMessagePolicy: File
dnsPolicy: ClusterFirst
restartPolicy: Always

```

2. Run the following command to change the deployment file to add content in scpc-alternate-resolution to query the DNS Stub.

Uncomment `ocscp-alternate-resolution's dnsConfig` and `dnsPolicy` before deployment to allow editing.

```
$kubectl edit deployment ocscp-scpc-alternate-resolution -n
scpsvc
```

Sample deployment file:

```

dnsConfig:
  nameservers:
    - 10.96.77.54
  searches:
    - cidscpsvc-230228133808.svc.cluster.local
    - svc.cluster.local
    - cluster.local
dnsPolicy: None

```

Add the following content:

- `nameservers`: Add the IP address that you recorded after installing the DNS Stub (cluster IP of the DNS Stub).
- `searches`: Add all the search based on the cluster name.
  - `scpsvc`  
This is the namespace.
  - `cluster.local`  
This is the cluster name.
- `dnsPolicy`: Set it to "None" if it is not already set by default.

### 3.6.4.3 ATS Testcase Parametrization on User Input

Parameterization is an approach to decoupling the data from the feature files in ATS so that ATS test cases can be run against some predefined configuration that contains customer-specific data and service configurations. Parameterization allows you to provide or adjust values



for the input and output parameters needed for the test cases to be compatible with the SUT configuration. You can update or adjust the key-value pair values in the `global.yaml` and `feature.yaml` files for each of the feature files so that they are compatible with SUT configuration. For more information, see the [Parameterization](#) section.

Three new folders "cust\_data", "product\_config" and "custom\_config" are added to the base path inside ATS pod `/var/lib/jenkins/ocscp_tests`. Where the `cust_data` folder is a replica of the already existing data folder, the `product_config` folder contains configuration files that are compatible with the default product configurations, and the `cust_config` folder is a replica of the `product_config` folder. You can update the custom folders, such as `cust_data` and `custom_config`.

### Product Config folder

The product config folder contains two types of YAML files: `global.yaml` and `feature_name>.yaml` (feature file-specific yaml).

### Global File

The `global.yaml` contains global variable names and their corresponding default values that can be used across all the feature files. The variable name declared in `global.yaml` should start with `global_Var_` as prefix.

For example, `<key_name>: &<variable_name> <default_value_of_variable>`

```
#START_GLOBAL
  global:
    File_Parameters:
      global_Var_SUT_apiPrefix1: &global_Var_SUT_apiPrefix1
USEast
      global_Var_SUT_ServingLocality1:
&global_Var_SUT_ServingLocality1 USEast
      global_Var_localNrfSetId1: &global_Var_localNrfSetId1
setnrfl1.nrfset.5gc.mnc012.mcc345
      global_Var_stubPort: &global_Var_stubPort 8080
#END_GLOBAL
```

Sample:

```
#START_GLOBAL
global:
  File_Parameters:
    global_Var_SUT_apiPrefix1: &global_Var_SUT_apiPrefix1 USEast
    # Following Serving Localities if needs to be changed are also to be
changed while deploying SCP before running ATS
    global_Var_SUT_ServingLocality1: &global_Var_SUT_ServingLocality1 USEast
    global_Var_SUT_ServingLocality2: &global_Var_SUT_ServingLocality2 Loc7
    global_Var_SUT_ServingLocality3: &global_Var_SUT_ServingLocality3 Loc8
    global_Var_SUT_ServingLocality4: &global_Var_SUT_ServingLocality4 Loc9

    # Following SetId's if needs to be changed are also to be changed while
deploying SCP before running ATS
    global_Var_localNrfSetId1: &global_Var_localNrfSetId1
setnrfl1.nrfset.5gc.mnc012.mcc345
    global_Var_remoteNrfSetId1: &global_Var_remoteNrfSetId1
setnrfr1.nrfset.5gc.mnc012.mcc345
    global_Var_remoteNrfSetId2: &global_Var_remoteNrfSetId2
setnrfr2.nrfset.5gc.mnc012.mcc345
```

```

# If stubPort has to be changed then stub has to be deployed with the
same port number before running ATS
global_Var_stubPort: &global_Var_stubPort 8080
global_Var_stubErrorCode: &global_Var_stubErrorCode 404

global_Var_udm_nfSetIdList1: &global_Var_udm_nfSetIdList1
set1.udmset.5gc.mnc012.mcc345
global_Var_udm_nfSetIdList2: &global_Var_udm_nfSetIdList2
set2.udmset.5gc.mnc012.mcc345
global_Var_udm_nfSetIdList3: &global_Var_udm_nfSetIdList3
set3.udmset.5gc.mnc012.mcc345

global_Var_smf_nfSetIdList1: &global_Var_smf_nfSetIdList1
set1.smfset.5gc.mnc012.mcc345
global_Var_smf_nfSetIdList2: &global_Var_smf_nfSetIdList2
set2.smfset.5gc.mnc012.mcc345
global_Var_smf_nfSetIdList3: &global_Var_smf_nfSetIdList3
set3.smfset.5gc.mnc012.mcc345

global_Var_pcf_nfSetIdList1: &global_Var_pcf_nfSetIdList1
set1.pcfset.5gc.mnc012.mcc345
global_Var_pcf_nfSetIdList2: &global_Var_pcf_nfSetIdList2
set2.pcfset.5gc.mnc012.mcc345
global_Var_pcf_nfSetIdList3: &global_Var_pcf_nfSetIdList3
set3.pcfset.5gc.mnc012.mcc345

global_Var_udm1_nfInstanceId: &global_Var_udm1_nfInstanceId 11111111-aaaa-
aaaa-aaaa-111111111111
global_Var_udm2_nfInstanceId: &global_Var_udm2_nfInstanceId 21111111-aaaa-
aaaa-aaaa-111111111111
global_Var_udm3_nfInstanceId: &global_Var_udm3_nfInstanceId 11111111-aaaa-
aaaa-aaaa-111111111122
global_Var_smf1_nfInstanceId: &global_Var_smf1_nfInstanceId 11111111-aaaa-
aaaa-aaaa-111111111111
global_Var_smf2_nfInstanceId: &global_Var_smf2_nfInstanceId 11111111-aaaa-
aaaa-aaaa-111111111122
global_Var_smf3_nfInstanceId: &global_Var_smf3_nfInstanceId 11111111-aaaa-
aaaa-aaaa-111111111133
global_Var_smf4_nfInstanceId: &global_Var_smf4_nfInstanceId 11111111-aaaa-
aaaa-aaaa-111111111144
global_Var_smf5_nfInstanceId: &global_Var_smf5_nfInstanceId 11111111-aaaa-
aaaa-aaaa-111111111155
global_Var_pcf1_nfInstanceId: &global_Var_pcf1_nfInstanceId
1faf1bbc-6e4a-3994-a507-a14ef8e1bc5a
global_Var_pcf2_nfInstanceId: &global_Var_pcf2_nfInstanceId
1faf1bbc-6e4a-3994-a507-a14ef8e1bc6b
global_Var_scp51_nfInstanceId: &global_Var_scp51_nfInstanceId
2fbf1bbc-6e4b-3994-b507-b14ef8e1bc51
global_Var_scp61_nfInstanceId: &global_Var_scp61_nfInstanceId
2fbf1bbc-6e4b-3994-b507-b14ef8e1bc61

# If svc name has to be changed then stub has to be deployed with the
same svc name before running ATS
global_Var_udm1_svc_name: &global_Var_udm1_svc_name udm1svc
global_Var_udm2_svc_name: &global_Var_udm2_svc_name udm2svc

```

```

global_Var_udm3_svc_name: &global_Var_udm3_svc_name udm3svc
global_Var_smf1_svc_name: &global_Var_smf1_svc_name smf1svc
global_Var_smf2_svc_name: &global_Var_smf2_svc_name smf2svc
global_Var_smf3_svc_name: &global_Var_smf3_svc_name smf3svc
global_Var_smf4_svc_name: &global_Var_smf4_svc_name smf4svc
global_Var_smf5_svc_name: &global_Var_smf5_svc_name smf5svc
global_Var_pcf1_svc_name: &global_Var_pcf1_svc_name pcf1svc
global_Var_pcf2_svc_name: &global_Var_pcf2_svc_name pcf2svc
global_Var_scp51_svc_name: &global_Var_scp51_svc_name scp51svc
global_Var_scp61_svc_name: &global_Var_scp61_svc_name scp61svc
global_Var_nrf1_svc_name: &global_Var_nrf1_svc_name nrf1svc
#END_GLOBAL

```

## Feature File

The <Feature\_name>.yaml file contains feature-specific variables that can be parameterized. For example, if the name of the feature file that needs to be parameterized is "ModelC\_NF\_Set.feature", then the YAML file corresponding to it will be named ModelC\_NF\_Set.yaml. This yaml file contains the #START\_GLOBAL and #END\_GLOBAL tags without any data in between, as the data is copied over from the global.yaml file to this section during test execution. The variable name in feature.yaml should have feature\_Var\_ as prefix.

For example:- <key\_name>: &<variable\_name> <default\_value\_of\_variable>

```

#START_GLOBAL
#END_GLOBAL

ModelC_NF_Set.feature:

File_Parameters:

feature_Var_udm1_Priority:
&feature_Var_udm1_Priority 0
feature_Var_smf1_Priority:
&feature_Var_smf1_Priority 0
feature_Var_traffic_rate:
&feature_Var_traffic_rate 100

```

## Scenario

The variables are referenced under the scenario tag to use in the feature file; for this, the scenario tag has to be concatenated with Scenario\_ and enclosed within double commas.

The variables defined under the scenario tag should have sc\_ as its prefix.

For example:- "Scenario\_<Scenario\_tag>":

```

"Scenario_Scenario-1- <Scenario_tag>":
  Input:
    File_Parameters:
      sc_http_requests_total_udm1: 100

```

Sample:

```
#START_GLOBAL
#END_GLOBAL

ModelC_NFSet.feature:
  File_Parameters:
    # The priorities can be changed without having the impact on the order of
    the priorities
    feature_Var_udm1_Priority: &feature_Var_udm1_Priority 0
    feature_Var_udm2_Priority: &feature_Var_udm2_Priority 1
    feature_Var_udm3_Priority: &feature_Var_udm3_Priority 1

    feature_Var_smf1_Priority: &feature_Var_smf1_Priority 0
    feature_Var_smf2_Priority: &feature_Var_smf2_Priority 0
    feature_Var_smf3_Priority: &feature_Var_smf3_Priority 1
    feature_Var_smf4_Priority: &feature_Var_smf4_Priority 3
    feature_Var_smf5_Priority: &feature_Var_smf5_Priority 4

    feature_Var_pcf1_Priority: &feature_Var_pcf1_Priority 0
    feature_Var_pcf2_Priority: &feature_Var_pcf2_Priority 0

    feature_Var_supiOfPathURI: &feature_Var_supiOfPathURI imsi-100000001

    feature_Var_traffic_rate: &feature_Var_traffic_rate 100

    # The traffic for the below metrics to be configured in the same
    proportionate as the traffice sent
    feature_Var_scp_http_rx_req_total_cnt: *feature_Var_traffic_rate
    feature_Var_scp_http_tx_req_total_cnt: *feature_Var_traffic_rate
    feature_Var_scp_http_tx_req_total_cnt_alternate_route:
    &feature_Var_scp_http_tx_req_total_cnt_alternate_route 200
    feature_Var_http_requests_total_udm1:
    &feature_Var_http_requests_total_udm1 0
    feature_Var_http_requests_total_udm2:
    &feature_Var_http_requests_total_udm2 0
    feature_Var_http_requests_total_udm3:
    &feature_Var_http_requests_total_udm3 0
    feature_Var_http_requests_total_smf1:
    &feature_Var_http_requests_total_smf1 0
    feature_Var_http_requests_total_smf2:
    &feature_Var_http_requests_total_smf2 0
    feature_Var_http_requests_total_smf3:
    &feature_Var_http_requests_total_smf3 0
    feature_Var_http_requests_total_smf4:
    &feature_Var_http_requests_total_smf4 0
    feature_Var_http_requests_total_pcf1:
    &feature_Var_http_requests_total_pcf1 0
    feature_Var_scp_http_rx_res_total_cnt: *feature_Var_traffic_rate
    feature_Var_scp_http_tx_res_total_cnt: *feature_Var_traffic_rate

    "Scenario_Scenario-1- Forward route initial UECM AMF Registration messages
    with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Discovery-target-NfSetid Header":
    Input:
      File_Parameters:
        sc_http_requests_total_udm1: 100      #To be configured in the same
```

proportionate as the traffice sent

"Scenario\_Scenario-2- Alternate route initial UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Discovery-target-NfSetid Header":

Input:

File\_Parameters:

sc\_http\_requests\_total\_udm1: 100 #To be configured in the same proportionate as the traffice sent  
sc\_http\_requests\_total\_udm2: 100 #To be configured in the same proportionate as the traffice sent

"Scenario\_Scenario-3- Load Balance initial UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Disocvery-target-NfSetid Header":

Input:

File\_Parameters:

sc\_http\_requests\_total\_udm1: 100 #To be configured in the same proportionate as the traffice sent  
sc\_http\_requests\_total\_udm2: 50 #To be configured in the same proportionate as the traffice sent  
sc\_http\_requests\_total\_udm3: 50 #To be configured in the same proportionate as the traffice sent

"Scenario\_Scenario-4- Alternate route initial UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot missing and 3GPP-Sbi-Disocvery-target-NfSetid Header present":

Input:

File\_Parameters:

sc\_http\_requests\_total\_udm1: 100 #To be configured in the same proportionate as the traffice sent

"Scenario\_Scenario-5- Forward route subsequent UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding Header with bl=nfset":

Input:

File\_Parameters:

sc\_http\_requests\_total\_udm1: 100 #To be configured in the same proportionate as the traffice sent

"Scenario\_Scenario-6- Alternate route subsequent UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding Header with bl=nfset":

Input:

File\_Parameters:

sc\_udm3\_Priority: 30 #Priority can be changed without having the impact on the order of the priorities  
sc\_http\_requests\_total\_udm1: 100 #To be configured in the same proportionate as the traffice sent  
sc\_http\_requests\_total\_udm2: 100 #To be configured in the same proportionate as the traffice sent

"Scenario\_Scenario-7- Load Balance subsequent UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding Header with bl=nfset":

Input:

File\_Parameters:

```

        sc_http_requests_total_udm1: 100      #To be configured in the same
proportionate as the traffice sent
        sc_http_requests_total_udm2: 50      #To be configured in the same
proportionate as the traffice sent
        sc_http_requests_total_udm3: 50      #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-8- Alternate route subsequent UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot missing and 3gpp-sbi-routing-binding Header with bl=nfset is present":

Input:

File\_Parameters:

```

        sc_http_requests_total_udm1: 100      #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-9- To test when Forward route for notification request UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding header bl=nfset":

Input:

File\_Parameters:

```

        sc_http_requests_total_udm1: 100      #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-10- To test when Forward route fails for notification request UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding header,alternate route should happen on NfSet":

Input:

File\_Parameters:

```

        sc_http_requests_total_udm1: 100      #To be configured in the same
proportionate as the traffice sent
        sc_http_requests_total_udm2: 100      #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-11- To test Forward route for notification request UECM AMF Registration messages with 3gpp-Sbi-Discovery-target-nf-set-id,3gpp-Sbi-Target-apiRoot":

Input:

File\_Parameters:

```

        sc_http_requests_total_udm1: 100      #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-12- To test when Forward route fails for notification request UECM AMF Registration messages with 3gpp-Sbi-Discovery-target-nf-set-id and 3gpp-Sbi-Target-apiRoot,alternate route should happen on NfSet":

Input:

File\_Parameters:

```

        sc_http_requests_total_udm1: 100      #To be configured in the same
proportionate as the traffice sent
        sc_http_requests_total_udm2: 100      #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-13- To test when Forward route fails for notification request UECM AMF Registration messages with 3gpp-Sbi-Discovery-target-nf-set-id and 3gpp-Sbi-Target-apiRoot,load balancing should happen on NfSet on NFs with similar priority":

```

Input:
  File_Parameters:
    sc_http_requests_total_udm1: 100    #To be configured in the same
proportionate as the traffice sent
    sc_http_requests_total_udm2: 50     #To be configured in the same
proportionate as the traffice sent
    sc_http_requests_total_udm3: 50     #To be configured in the same
proportionate as the traffice sent

"Scenario_Scenario-14- Forward route initial SMF PduSession sm-contexts
create messages with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Disocvery-target-
NfSetid Header":
  Input:
    File_Parameters:
      sc_http_requests_total_smf1: 100    #To be configured in the same
proportionate as the traffice sent

"Scenario_Scenario-15- Alternate route SMF PduSession sm-contexts create
messages with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Disocvery-target-NfSetid
Header":
  Input:
    File_Parameters:
      sc_http_requests_total_smf1: 100    #To be configured in the same
proportionate as the traffice sent
      sc_http_requests_total_smf2: 100    #To be configured in the same
proportionate as the traffice sent

"Scenario_Scenario-16- Error response code received when SMF PduSession sm-
contexts create message is sent with missing information in 3gpp-sbi-routing-
binding header and 3gpp-Sbi-Target-apiRoot header is missing":
  Input:
    File_Parameters:
      sc_scp_http_tx_req_total_cnt: 0     #To be configured in the same
proportionate as the traffice sent
      sc_ocscp_metric_scp_generated_response_total: 100    #To be
configured in the same proportionate as the traffice sent

"Scenario_Scenario-17-Error response code received when SMF PduSession sm-
contexts create message is sent with missing information in 3gpp-Sbi-
Discovery-target-nf-set-id header and 3gpp-Sbi-Target-apiRoot header":
  Input:
    File_Parameters:
      sc_targetNfSetId_Send: 1
      sc_http_requests_total_smf1: 100    #To be configured in the same
proportionate as the traffice sent

"Scenario_Scenario-18- Alternate route SMF PduSession sm-contexts create
messages with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Disocvery-target-NfSetid
Header":
  Input:
    File_Parameters:
      sc_smf1_Priority: 2    #Priority can be changed without having the
impact on the order of the priorities
      sc_scp_http_tx_req_total_cnt_alternate_route: 400    #To be
configured in the same proportionate as the traffice sent
      sc_http_requests_total_smf1: 100    #To be configured in the same

```

```

proportionate as the traffice sent
    sc_http_requests_total_smf4: 100    #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-19- No Alternate route for initial UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Discovery-target-NfSetid Header as reroute Policy is disabled":

Input:

File\_Parameters:

```

    sc_http_requests_total_udm1: 100    #To be configured in the same
proportionate as the traffice sent
    sc_scp_http_rx_res_total_cnt: 0      #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-20- Forward route PCF SMPolicyControl Create SMPolicyAssociation with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Disocvery-target-NfSetid Header and verify that 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-producer-id headers are not present in response":

Input:

File\_Parameters:

```

    sc_pcf1_Service_Priority: 80        #Priority can be changed
without having the impact on the order of the priorities
    sc_http_requests_total_pcf1: 100    #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-21- Alternate route PCF SMPolicyControl Create SMPolicyAssociation messages with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Disocvery-target-NfSetid Header and verify that 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-producer-id headers are present in response":

Input:

File\_Parameters:

```

    sc_pcf1_Priority: 2                #Priority can be changed without having the
impact on the order of the priorities
    sc_http_requests_total_pcf2: 100    #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-22- Alternate route initial UECM AMF Registration messages with 3gpp-Sbi-Target-apiRoot missing and 3GPP-Sbi-Disocvery-target-NfSetid Header present and verify that only 3gpp-sbi-producer-id header is present in response since location header is present":

Input:

File\_Parameters:

```

    sc_http_requests_total_udm1: 100    #To be configured in the same
proportionate as the traffice sent

```

"Scenario\_Scenario-23- Alternate route PCF SMPolicyControl Create messages with 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Disocvery-target-NfSetid Header and verify that 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-producer-id headers are present in response":

Input:

File\_Parameters:

```

    sc_pcf1_Priority: 2                #Priority can be changed without having the
impact on the order of the priorities
    sc_http_requests_total_pcf2: 100    #To be configured in the same
proportionate as the traffice sent

```



"Scenario\_Scenario-24- Alternate route PCF SMPolicyControl Create messages with 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding Header and verify that 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-producer-id headers are present in response":

Input:

File\_Parameters:

sc\_Var\_pcf1\_Priority: 2 #Priority can be changed without having the impact on the order of the priorities  
sc\_http\_requests\_total\_pcf2: 100 #To be configured in the same proportionate as the traffice sent

### Updates in Feature Files

The variables are defined in either global.yaml or <feature\_name>.yaml is used in the feature files by enclosing the variable name in curly brackets. The steps in a feature file without parameterization are as follows:

**Figure 3-17 Feature File without Parameterization**

```
Then Update File /var/lib/jenkins/ocscp_tests/data/udm1_nfset_reg.json For Key nfProfile.nfSetIdList.0 With Value set1.udmset.5gc.mmc012.mcc345
Then Update File /var/lib/jenkins/ocscp_tests/data/udm1_nfset_reg.json For Key nfProfile.nfSetIdList.1 With Value set3.udmset.5gc.mmc012.mcc345
Then Update Json /var/lib/jenkins/ocscp_tests/data/udm1_nfset_reg.json With Key nfProfile.locality:USEast,nfProfile.nfInstanceId:11111111-aaaa-aaaa-aaaa-111111111111, nfProfile.nfServices.ipEndPoints.port:null, nfProfile.nfServices.fqdn:udm1svc.default.svc.cluster.local,nfProfile.priority:0 For Service udm1svc
Then Soothsayer NF With Serving Scope Register ss2 setnrfl1.nrfset.5gc.mmc012.mcc345 /var/lib/jenkins/ocscp_tests/data/udm1_nfset_reg.json
```

The steps in a feature file when it is parameterized:

**Figure 3-18 Feature File when it is Parameterized**

```
Then Update File /var/lib/jenkins/ocscp_tests/data/udm1_nfset_reg.json For Key nfProfile.nfSetIdList.0 With Value {global_Var_udm1_nfSetIdList1}
Then Update File /var/lib/jenkins/ocscp_tests/data/udm1_nfset_reg.json For Key nfProfile.nfSetIdList.1 With Value {global_Var_udm1_nfSetIdList3}
Then Update Json /var/lib/jenkins/ocscp_tests/data/udm1_nfset_reg.json With Key nfProfile.nfServices.apiPrefix:{global_Var_SUT_apiPrefix1}, nfProfile.locality:{global_Var_SUT_ServingLocality1},nfProfile.nfInstanceId:{global_Var_udm1_nfInstanceId}, nfProfile.nfServices.ipEndPoints.port:null, nfProfile.nfServices.fqdn:{global_Var_udm1_svc_name}.default.svc.cluster.local,nfProfile.priority:{feature_Var_udm1_Priority} For Service {global_Var_udm1_svc_name}
Then Soothsayer NF With Serving Scope Register ss2 {global_Var_localNrfSetId1} /var/lib/jenkins/ocscp_tests/data/udm1_nfset_reg.json
```

### Running Feature Files

The changes are made in the product config folder, so the same configuration type can be chosen from the Jenkins UI and the test case can be run, and in the logs, it can be seen that the values of variables are being replaced with the ones that are provided in global.yaml or <feature\_name>.yaml.

#### Note

Only variables that bring in some value addition require parameterization, and a change in the value of those variables does not affect the test case. A variable that can have an effect across all the feature files should be kept under global.yaml, a variable that is specific to a feature file has to be kept under <feature\_name>.yaml, and a variable that is related to a specific scenario must be kept under scenario level.

## 3.6.5 Appendix

This section provides supplementary information that may be helpful for a more comprehensive understanding of installing and running SCP test cases in ATS.

### 3.6.5.1 Creating Custom Service Account

By default, ATS will create a service account with the below rules. If the user does not want to use the default service account, then the service account needs to be manually created with the below permission, and the created custom service account name needs to be specified in the `ocats_ocscp_values_24.2.6.yaml` file.

To run SCP-ATS, use the following rules to create a custom service account:

```
rules:
- apiGroups: ["apps"]
  resources: ["deployments", "replicasets"]
  verbs: ["watch", "get", "list", "create", "delete", "update", "patch"]
- apiGroups: [""]
  resources: ["pods", "services", "pod/logs"]
  verbs: ["watch", "get", "list", "create", "delete"]
- apiGroups: [""]
  resources: ["secrets"]
  verbs: ["get", "list"]
- apiGroups: [""]
  resources: ["configmaps"]
  verbs: ["watch", "get", "list", "create", "delete", "update", "patch"]
```

### 3.6.5.2 Adding New Stubs to SCP-ATS

For adding new stubs related to pystub, add deployment, and service yaml files inside the template folder of `ocats-pystub` charts and update the deployment name in the stub deployment file as follows:

```
name- .Values.ausf11.deploymentName
```

```
app- .Values.ausf11.deploymentName
```

Update service name, label and selectors, and ports in the `service.yaml` file.

```
name: {{ .Values.ausf11.service.name }}
```

```
app: {{ .Values.ausf11.deploymentName }}
```

```
port: {{ .Values.ausf11.service.ports.port }}
```

Update the `ocats_ocscp_values_24.2.6.yaml` file with new information:

```
ausf1:
service:
name: ausf1svc
```

```
type: ClusterIP
ports:
port: 8080
```

The images represent pystub service and deployment files for each stubs:

**Figure 3-19 Sample Deployment File**

```
-rw-r--r--. 1 root root 782 Oct 25 14:36 ausf12-service.yaml
-rw-r--r--. 1 root root 2597 Oct 25 14:36 ausf12-deployment.yaml
-rw-r--r--. 1 root root 782 Oct 25 14:36 ausf11-service.yaml
-rw-r--r--. 1 root root 2597 Oct 25 14:36 ausf11-deployment.yaml
```

## 3.7 Installing ATS for SEPP

This section describes Automated Testing Suite (ATS) installation procedures for Security Edge Protection Proxy (SEPP) in a cloud native environment.

### 3.7.1 Resource Requirements

#### Total Number of Resources

The resources required to install SEPP-ATS are as follows:

**Table 3-23 Total Number of Resources**

| Resource             | CPUs | Memory(GB) | Storage(GB) |
|----------------------|------|------------|-------------|
| SEPP SUT Total       | 15.1 | 24.128     | 0           |
| cnDBTier Total       | 40   | 40         | 20          |
| ATS Total            | 4.5  | 4.5        | 1           |
| Grand Total SEPP ATS | 59.6 | 68.628     | 21          |

#### Resource Details

The details of resources required to install SEPP-ATS are as follows:

**Table 3-24 Resource Details**

| Microservice        | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | # Replicas (regular deployment) | # Replicas (ATS deployment) | CPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|---------------------|-----------------------|------------------------------|-----------------------------------|---------------------------------|-----------------------------|-----------------------|------------------------------|-----------------------------------|
| SEPP Pods           |                       |                              |                                   |                                 |                             |                       |                              |                                   |
| n32-ingress-gateway | 1.5                   | 2                            | 0                                 | 1                               | 1                           | 1.5                   | 2                            | 0                                 |

Table 3-24 (Cont.) Resource Details

| Microservice            | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | # Replicas (regular deployment) | # Replicas (ATS deployment) | CPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|-------------------------|-----------------------|------------------------------|-----------------------------------|---------------------------------|-----------------------------|-----------------------|------------------------------|-----------------------------------|
| n32-egress-gateway      | 1.5                   | 2                            | 0                                 | 1                               | 1                           | 1.5                   | 2                            | 0                                 |
| plmn-ingress-gateway    | 1.5                   | 2                            | 0                                 | 1                               | 1                           | 1.5                   | 2                            | 0                                 |
| plmn-egress-gateway     | 1.5                   | 2                            | 0                                 | 1                               | 1                           | 1.5                   | 2                            | 0                                 |
| pn32f-svc               | 1                     | 2                            | 0                                 | 1                               | 1                           | 1                     | 2                            | 0                                 |
| cn32f-svc               | 1                     | 2                            | 0                                 | 1                               | 1                           | 1                     | 2                            | 0                                 |
| cn32c-svc               | 0.5                   | 1                            | 0                                 | 1                               | 1                           | 0.5                   | 1                            | 0                                 |
| pn32c-svc               | 0.5                   | 1                            | 0                                 | 1                               | 1                           | 0.5                   | 1                            | 0                                 |
| config-mgr-svc          | 1                     | 2                            | 0                                 | 1                               | 1                           | 1                     | 2                            | 0                                 |
| nrf-client-nfdiscovery  | 1                     | 2                            | 0                                 | 1                               | 1                           | 1                     | 2                            | 0                                 |
| nrf-client-nfmanagement | 1                     | 1                            | 0                                 | 1                               | 1                           | 1                     | 1                            | 0                                 |
| ocpm-config-server      | 0.5                   | 1                            | 0                                 | 1                               | 1                           | 0.5                   | 1                            | 0                                 |
| appinfo                 | 0.5                   | 1                            | 0                                 | 1                               | 1                           | 0.5                   | 1                            | 0                                 |
| perfinfo                | 0.1                   | 0.128                        | 0                                 | 1                               | 1                           | 0.1                   | 0.128                        | 0                                 |
| nf-mediation            | 1                     | 1                            | 0                                 | 1                               | 1                           | 1                     | 1                            | 0                                 |
| alternate-route         | 1                     | 1                            | 0                                 | 1                               | 1                           | 1                     | 1                            | 0                                 |
| coherence-svc           | 1                     | 2                            | 0                                 | 1                               | 1                           | 1                     | 2                            | 0                                 |
| SEPP SUT Totals         |                       |                              |                                   |                                 |                             | 15.1 CPU              | 24.128 GB                    | 0                                 |
| ATS                     |                       |                              |                                   |                                 |                             |                       |                              |                                   |
| ATS Behave              | 3                     | 3                            | 1 (Optional)                      | 1                               | 1                           | 3                     | 3                            | 1                                 |
| ATS Stub (Python)       | .5                    | .5                           | 0                                 | 1                               | 1                           | .5                    | .5                           | 0                                 |
| ATS Stub-2 (Python)     | .5                    | .5                           | 0                                 | 1                               | 1                           | .5                    | .5                           | 0                                 |
| ATS Stub-3 (Python)     | .5                    | .5                           | 0                                 | 1                               | 1                           | .5                    | .5                           | 0                                 |

Table 3-24 (Cont.) Resource Details

| Microservice                                      | CPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | # Replicas (regular deployment) | # Replicas (ATS deployment) | CPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|---------------------------------------------------|-----------------------|------------------------------|-----------------------------------|---------------------------------|-----------------------------|-----------------------|------------------------------|-----------------------------------|
| ATS Totals                                        |                       |                              |                                   |                                 |                             | 4.5                   | 4.5                          | 1                                 |
| DB Tier Pods (minimum of 4 worker nodes required) |                       |                              |                                   |                                 |                             |                       |                              |                                   |
| vrt-launcher-dt-1.cluster.local                   | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| vrt-launcher-dt-2.cluster.local                   | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| vrt-launcher-dt-3.cluster.local                   | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| vrt-launcher-dt-4.cluster.local                   | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| vrt-launcher-mt-1.cluster.local                   | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| vrt-launcher-mt-2.cluster.local                   | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| vrt-launcher-mt-3.cluster.local                   | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| vrt-launcher-sq-1.cluster.local                   | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| vrt-launcher-sq-2.cluster.local                   | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| vrt-launcher-db-installer.cluster.local           | 4                     | 4                            | 2                                 | 2                               | 1                           | 4                     | 4                            | 2                                 |
| DB Tier Totals                                    |                       |                              |                                   |                                 |                             | 40                    | 40                           | 20                                |

### 3.7.1.1 SEPP ATS Compatibility Matrix

The following table lists the versions SEPP ATS and the compatibility with the SEPP and ATS framework:

**Table 3-25 SEPP ATS Compatibility Matrix**

| SEPP ATS Release | SEPP Release | ATS Framework version |
|------------------|--------------|-----------------------|
| 24.2.4           | 24.2.5       | 24.2.6                |
| 24.2.3           | 24.2.4       | 24.2.4                |
| 24.2.2           | 24.2.3       | 24.2.3                |
| 24.2.1           | 24.2.1       | 24.2.3                |
| 24.2.0           | 24.2.0       | 24.2.2                |
| 24.1.0           | 24.1.0       | 24.1.1                |
| 23.4.2           | 23.4.2       | 23.4.2                |
| 23.4.1           | 23.4.1       | 23.4.1                |
| 23.4.0           | 23.4.0       | 23.4.0                |
| 23.3.1           | 23.3.1       | 23.3.1                |
| 23.3.0           | 23.3.0       | 23.3.0                |
| 23.2.1           | 23.2.1       | 23.2.2                |
| 23.2.0           | 23.2.0       | 23.2.0                |

## 3.7.2 Downloading the ATS Package

### Locating and Downloading ATS and Simulator Images

To locate and download the ATS Image from MOS:

1. Log in to [My Oracle Support](#) with your credentials.
2. Select the **Patches and Updates** tab to locate the patch.
3. In the **Patch Search** window, click **Product or Family (Advanced)**.
4. Enter *Oracle Communications Cloud Native Core - 5G* in the **Product** field.
5. Select *Oracle Communications Cloud Native Core Security Edge Protection Proxy <release\_number>* from **Release** drop-down.
6. Click **Search**. The **Patch Advanced Search Results** list appears.
7. Select the required ATS patch from the search results. The Patch Details window appears.
8. Click **Download**. The File Download window appears.
9. Click the **<p\*\*\*\*\*\_<release\_number>\_Tekelec>.zip** file to download the CNC SEPP ATS package file.
10. Untar the zip file to access all the ATS Images. The ocsepp-ats directory has the following files:

The csar directory has following files:

```
ocats_ocsepp_csar_24_2_4_0_0.zip
ocats_ocsepp_csar_24_2_4_0_0.zip.sha256
```

**Note**

The above zip file contains all the images and custom values required for 24.2.4 release of OCATS-OCSEPP.

11. The ocats\_ocsepp\_csar\_24\_2\_4\_0\_0.zip file has following definitions:

```
├── Definitions
│   ├── ocats_ocsepp_cne_compatibility.yaml
│   └── ocats_ocsepp.yaml
├── Files
│   ├── ChangeLog.txt
│   ├── Helm
│   │   └── ocats-sepp-24.2.4.tgz (Helm Charts)
│   ├── Licenses
│   ├── ocats-sepp-24.2.4.tar (BDD client image)
│   ├── Oracle.cert
│   ├── seppstub-24.2.4.tar (Stub server image)
│   └── Tests
├── Scripts/
│   ├── ocats_ocsepp_tests_jenkinsjobs_24.2.4.tgz
│   │   ├── jobs (For Persistent Volume)
│   │   └── ocsepp_tests (For Persistent Volume)
│   └── ocats_ocsepp_values_24.2.4.yaml (Custom values file for
installation)
├── ocats_ocsepp.mf
├── TOSCA-Metadata
└── TOSCA.meta
```

12. Copy the zip file to Kubernetes cluster where you want to deploy ATS.

### 3.7.3 Pushing the Images to Customer Docker Registry

#### Preparing to Deploy ATS and Stub Pod in Kubernetes Cluster

To deploy ATS and Stub Pod in Kubernetes Cluster:

1. Run the following command to extract tar file content:

```
unzip ocats_ocsepp_csar_24_2_4_0_0.zip
```

The following docker image tar files are located at **Files** folder:

- ocats-sepp-24.2.4.tar
- seppstub-24.2.4.tar

2. Run the following commands in your cluster to load the ATS docker image, 'ocats-sepp-24.2.4.tar' and Stub docker image seppstub-24.2.4.tar, and push it to your registry.

```
$ docker load -i ocats-sepp-24.2.4.tar
$ docker load -i seppstub-24.2.4.tar

$ docker tag ocats/ocats-sepp:24.2.4 <local_registry>/ocats/ocats-sepp:24.2.4

$ docker tag ocats/seppstub:24.2.4 <local_registry>/ocats/seppstub:24.2.4

$ docker push <local_registry>/ocats/ocats-sepp:24.2.4

$ docker push <local_registry>/ocats/seppstub:24.2.4
```

3. Run the following command to get the helm charts are located in Helm directory of files folder:

```
tar -xvf ocats-sepp-24.2.4.tgz
```

The output of this command is:

```
ocats-sepp/
ocats-sepp/Chart.yaml
ocats-sepp/charts/
ocats-sepp/values.yaml
```

4. Create a copy of the custom values located at **Scripts/ocats\_ocsepp\_values\_24.2.4.yaml** and update it for image name, tag and other parameters as per the requirement.

## 3.7.4 Creating Secrets and Support for TLSv1.2 and TLSv1.3

### 3.7.4.1 Configuring Root Certificate

The following are the steps to configure the root certificate (caroot.cer):

#### Note

- Use the same root certificate (caroot.cer) and key which is used for creating the SEPP certificates.
- If the user has already generated the caroot.cer and cakey.pem file while deploying SEPP then user can skip to Generate ATS certificate step.
- Both the ATS and SEPP must have same root certificate.



1. In case caroot.cer is not available for SEPP, Create ssl.conf file for SEPP using the following format:

```
# Creation of CSEPP Certs, Fqdn should be changed

#ssl.conf
[ req ]default_bits = 4096
distinguished_name = req_distinguished_name
req_extensions = req_ext
[ req_distinguished_name ]
countryName = Country Name (2 letter code)
countryName_default = IN
stateOrProvinceName = State or Province Name (full name)
stateOrProvinceName_default = Karnataka
localityName = Locality Name (eg, city)
localityName_default = Bangalore
organizationName = Organization Name (eg, company)
organizationName_default = Oracle
commonName = sepp1.inter.oracle.com
commonName_max = 64
commonName_default = sepp1.inter.oracle.com
[ req_ext ]
subjectAltName = @alt_names
[alt_names]
IP = 127.0.0.1
DNS.1 = sepp1.inter.oracle.com
```

2. Set the following environment variables:

```
export PEM_PHRASE=NextGen1
export DEPLOYMENT_NAMESPACE=sepp1
```

3. Run the following command to create the required files:

```
openssl req -new -keyout cakey.pem -out careq.pem -passout pass:$
{PEM_PHRASE} -subj "/C=IN/ST=Karnataka/L=Bangalore/O=Oracle/
CN=sepp1.inter.oracle.com/emailAddress=xyz@oracle.com"

openssl x509 -signkey cakey.pem -req -days 3650 -in careq.pem -out
caroot.cer -extensions v3_ca -passin pass:${PEM_PHRASE}

openssl req -x509 -nodes -sha256 -days 365 -newkey rsa:2048 -keyout
rsa_private_key -out rsa_certificate.crt -subj '/C=IN/ST=Karnataka/
L=Bangalore/O=Oracle/CN=sepp1.inter.oracle.com/emailAddress=xyz@oracle.com'

openssl rsa -in rsa_private_key -outform PEM -out rsa_private_key_pkcs1.pem

openssl req -new -key rsa_private_key -out ocsepp.csr -config ssl.conf -
subj '/C=IN/ST=Karnataka/L=Bangalore/O=Oracle/CN=sepp1.inter.oracle.com/
emailAddress=xyz@oracle.com'

openssl x509 -CA caroot.cer -CAkey cakey.pem -CAserial serial.txt -req -in
ocsepp.csr -out ocsepp.cer -days 365 -extfile ssl.conf -extensions req_ext
```

```

-passin pass:${PEM_PHRASE}

openssl ecparam -genkey -name prime256v1 -noout -out ec_private_key.pem

openssl pkcs8 -topk8 -in ec_private_key.pem -inform pem -out
ecdsa_private_key.pem -outform pem -nocrypt

openssl req -new -key ecdsa_private_key.pem -x509 -nodes -days 365 -out
ecdsa_certificate_pkcs1.crt -subj '/C=IN/ST=Karnataka/L=Bangalore/O=Oracle/
CN=sepp1.inter.oracle.com/emailAddress=xyz@oracle.com'

openssl req -new -key ecdsa_private_key.pem -out ecdsa_certificate.csr -
subj '/C=IN/ST=Karnataka/L=Bangalore/O=Oracle/CN=sepp1.inter.oracle.com/
emailAddress=xyz@oracle.com'

echo NextGen1 > trust.txt
echo NextGen1 > key.txt
echo 1234 > serial.txt

```

### 3.7.4.2 Generating ATS Certificate

The following are the steps to configure the ATS certificate:

1. Create and edit the `ssl.conf` file as follows:

#### Note

- While trying to access the GUI with DNS, ensure that the common Name\_default is the same as the DNS name being used.
- Ensure that the DNS is in the format `<service_name>.<namespace>.<cluster_domain>`
- The user can add multiple DNS like DNS.1, DNS.2 so on.
- The `ATS_HELM_RELEASE_NAME` is the release name which will be used to deploy ATS.

- a. In the `alt_names` section of the `ssl.conf`, IPs has to be listed down through which ATS GUI will be opened. We can add multiple IPs like IP.1, IP.2 so on.
- b. All stubserver service names (`{{ATS_HELM_RELEASE_NAME}}-stubserver.{ats-namespace}`, `{{ATS_HELM_RELEASE_NAME}}-stubserver-2.{ats-namespace}`, `{{ATS_HELM_RELEASE_NAME}}-stubserver-3.{ats-namespace}`) must be in Subject Alternative Name in certificate.
- c. Update `bddclient` service name (`{{ATS_HELM_RELEASE_NAME}}-bddclient.${DEPLOYMENT_NAMESPACE}.svc.cluster.local`) in the `commonName`, `commonName_default` and DNS name in `alt_names` section.

**Sample code:**

```
#ssl.conf
```

```
[ req ]
default_bits = 4096
distinguished_name = req_distinguished_name
req_extensions = req_ext

[ req_distinguished_name ]
countryName = Country Name (2 letter code)
countryName_default = IN
stateOrProvinceName = State or Province Name (full name)
stateOrProvinceName_default = Karnataka
localityName = Locality Name (eg, city)
localityName_default = Bangalore
organizationName = Organization Name (eg, company)
organizationName_default = Oracle
commonName = ${ATS_HELM_RELEASE_NAME}-bddclient.${
DEPLOYMENT_NAMESPACE}.svc.cluster.local
commonName_max = 64
commonName_default = ${ATS_HELM_RELEASE_NAME}-bddclient.${
DEPLOYMENT_NAMESPACE}.svc.cluster.local

[ req_ext ]
subjectAltName = @alt_names

[alt_names]
IP.1 = 127.0.0.1
IP.2 = 10.75.217.5

#Mandatory values
DNS.1 = ${ATS_HELM_RELEASE_NAME}-bddclient.${
DEPLOYMENT_NAMESPACE}.svc.cluster.local
DNS.2 = ${ATS_HELM_RELEASE_NAME}-stubserver.${DEPLOYMENT_NAMESPACE}
DNS.3 = ${ATS_HELM_RELEASE_NAME}-stubserver-2.${DEPLOYMENT_NAMESPACE}
DNS.4 = ${ATS_HELM_RELEASE_NAME}-stubserver-3.${DEPLOYMENT_NAMESPACE}
DNS.5 = localhost
```

2. Run the following command to create a certificate signing request or csr:

```
$ openssl req -config ssl.conf -newkey rsa:2048 -days 1000 -nodes -keyout
rsa_private_key_pkcs1.key > ssl_rsa_certificate.csr
```

Output:

```
Ignoring -days; not generating a certificate
Generating a RSA private key
...+++++
.....+++++
writing new private key to 'rsa_private_key_pkcs1.key'
-----
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
```

```
Country Name (2 letter code) [IN]:  
State or Province Name (full name) [KA]:  
Locality Name (eg, city) [BLR]:  
Organization Name (eg, company) [ORACLE]:  
Common Name (e.g. server FQDN or YOUR name) [ocats]:  
[cloud-user@star23-bastion-1 ocats]$
```

3. Run the following command to verify whether all configurations are done:

```
openssl req -text -noout -verify -in ssl_rsa_certificate.csr
```

4. Run the following command to sign the certificate signing request or csr file with root certificate:

```
$ openssl x509 -extfile ssl.conf -extensions req_ext -req -in  
ssl_rsa_certificate.csr -days 1000 -CA caroot.cer -CAkey cakey.pem -  
set_serial 04 > ssl_rsa_certificate.crt
```

Output:

```
Signature ok  
subject=C = IN, ST = KA, L = BLR, O = ORACLE, CN = sepp-ats-rel-  
bddclient.testns.svc.cluster.local  
Getting CA Private Key  
[cloud-user@star23-bastion-1 ocats]$
```

#### Note

When the output prompts for the current password, enter the password was used to create cakey.pem file.

5. Verify whether the certificate is properly signed by root certificate:

```
$ openssl verify -CAfile caroot.cer ssl_rsa_certificate.crt
```

Output:

```
ssl_rsa_certificate.crt:OK
```

6. For then jenkins to support GUI access through https, a jks file has to be created. Perform the following steps to generate jks file for Jenkins Server:

- a. Run the following command to generate the .p12 keystore file:

```
$ openssl pkcs12 -inkey rsa_private_key_pkcs1.key -in  
ssl_rsa_certificate.crt -export -out certificate.p12
```

Output:

Enter Export Password:  
Verifying - Enter Export Password:

**Note**

When the output prompts for the password, enter the password and note it down, as it is required for creating the jks file.

7. Run the following command to convert .p12 file in jks format file to be used in Jenkins Server:

**Note**

- Ensure to use the same password used for creating jks file and for creating the .p12 file.
- Java should be pre-installed to run the keytool utility.

```
$ keytool -importkeystore -srckeystore ./certificate.p12 -srcstoretype pkcs12 -destkeystore jenkinsserver.jks -deststoretype JKS
```

Output:

```
Importing keystore ./certificate.p12 to jenkinsserver.jks...
Enter destination keystore password:
Re-enter new password:
Enter source keystore password:
Entry for alias 1 successfully imported.
Import command completed: 1 entries successfully imported, 0 entries
failed or cancelled
```

The generated file, jenkinsserver.jks must be given to the jenkins server.

### 3.7.4.3 Creating ATS Secret and Configuring Helm chart

The following are the steps to create ATS Secret and configure the Helm chart:

**Note**

The user can decide whether to use the generated CA signed certificate or self-signed certificate.

1. Run the following command to create secret:

```
kubectl create secret generic ocats-sepp-secret --from-
file=jenkinsserver.jks --from-file=ssl_rsa_certificate.crt
--from-file=rsa_private_key_pkcs1.key --from-file=caroot.cer -n
<deployment_namespace>
```

2. Run the following command to verify the secret:

```
$ kubectl describe secret ocats-sepp-secret -n testns
```

Output:

```
Name:          ocats-sepp-secret
Namespace:     testns
Labels:        <none>
Annotations:   <none>

Type: Opaque

Data
====
caroot.cer:          1147 bytes
ssl_rsa_certificate.crt: 1424 bytes
jenkinsserver.jks:   2357 bytes
rsa_private_key_pkcs1.key: 1675 bytes
```

### Changes to the Helm charts:

The following changes must be updated in the `ocats_ocsepp_values_<version>.yaml` file:

- The Helm parameter `atsGuiTLSEnabled` must set to `true` for ATS to get the certificates and support HTTPS for GUI. If the user does not want to open ATS GUI in HTTPS mode, then `atsGuiTLSEnabled` flag should be set to `false`.

```
atsGuiTLSEnabled: false
```

- The Helm parameter `atsCommunicationTLSEnabled` must set to `true` for necessary context variable to be created which can be later used to communicate with other services in HTTPS.
  - For non-asm deployment `atsCommunicationTLSEnabled` flag should be set to `true`.
  - For asm deployment `atsCommunicationTLSEnabled` flag should be set to `false`.

```
atsCommunicationTLSEnabled: true #If set to true, ATS will get necessary
variables to communicate with SUT, Stub
or other NFs with TLS enabled. It is not required in ASM
environment.
```

- The certificates section of the `bddclient` and `stubserver` section of the `ats` custom values file must be updated as follows:

```
certificates:
```

```
cert_secret_name: "ocats-sepp-secret"
a_cert: "caroot.cer"
client_cert: "ssl_rsa_certificate.crt"
private_key: "rsa_private_key_pkcs1.key"

# This parameter is needed when atsGuiTLSEnabled is set to true. This
# file is necessary for ATS GUI to be opened with secured TLS protocol. The
# file caroot.pem, used during creation of jks file needs to be passed for
# Jenkins/ATS API communication.
jks_file: "jenkinsserver.jks"

jks_password: "123456" #This is the password given to the jks file
while creation.
```

Add caroot certificate in browser to access the ATS GUI. The caroot.cer file certificate created by us will be added to Truststore, in this case the browser.

The following are the steps to add caroot certificate in the browser to access the ATS GUI, either Mozilla Firefox or Chrome:

#### Note

Future versions of these browsers may involve different menu options. For more information on importing root certificate, see the browser documentation to add a self-signed certificate to the browser as a trusted certificate.

1. In the Chrome browser, navigate to the settings and search for certificates.
2. Click the **security** option that appears next to search.
3. Click the **Manage Device Certificate** option. The Keychain Access window opens.
4. Search the tab certificate and drag and drop the downloaded caroot certificate.
5. Find the uploaded certificate in the list, usually listed by a temporary name.
6. Double click the certificate and expand the Trust option.
7. In **When using this certificate** option, assign it to "always trust".
8. Close the window and validate if it asks for the password.
9. Save and restart the browser.
1. In the Mozilla Firefox browser, navigate to the settings and search for certificates.
2. Click the **View Certificate** that appears next to search. This opens a Certificate Manager window.
3. Navigate to the Authorities section, click the **Import** button, and upload the caroot certificate.
4. Click the **Trust** options in the pop-up window and click OK.
5. Save and restart the browser.

### 3.7.4.4 Create ATS Health Check secret

To enable the ATS health check pipeline, the following configurations need to be updated in the ocats\_ocsepp\_values\_<version>.yaml file:

**Non OCI Environment**

1. The following parameters needs to be updated in the base64 encoded version format, occnehostip, occnehostusername, occnehostpassword, envtype.
2. On installing ATS, health check secret will be created, and the health check pipeline will be shown in the ATS GUI. If healthcheck parameter is set to false, then the health check pipeline will not be visible in the ATS GUI.

```
bddclient
  atsFeatures:
    healthcheck: true

    sshDetails:
      secretname: "healthchecksecret"
      occnehostip: "" # $(echo -n '10.75.217.42' | base64), Where occne host ip
needs to be provided
      occnehostusername: "" # $(echo -n 'cloud-user' | base64), Where occne
host username needs to be provided
      occnehostpassword: "" # $(echo -n '*****' | base64), Where password of host
needs to be provided
      envtype: "" # $(echo -n 'OCCNE' | base64), Where occne keyword needs to
be provided
```

**OCI Environment**

For key based health check support in OCI, refer to [ATS Health Check](#) section under the ATS Framework Features.

1. The following parameters needs to be updated in the base64 encoded version in the ocats\_ocsepp\_values\_<version>.yaml file:

```
bddclient
  atsFeatures:
    healthcheck: true    envtype: "" # $(echo -n 'OCCNE' | base64), Where
occne keyword needs to be provided

    sshDetails
      ociHealthCheck:
        passwordAuthenticationEnabled: false
        bastion:
          ip: "" # $(echo -n '10.75.217.42' | base64), Where occne host ip
needs to be provided
          username: "" # $(echo -n '10.75.217.42' | base64), Where occne host
ip needs to be provided
          password: ""
          operatorInstance:
            ip: "" # $(echo -n '10.75.217.42' | base64), Where occne host ip
needs to be provided
            username: "" # $(echo -n '10.75.217.42' | base64), Where occne host
ip needs to be provided
            password: ""
```



## 3.7.5 Configuring ATS

This section describes how to configure ATS for SEPP.

### 3.7.5.1 Enabling Aspen Service Mesh

To enable Aspen Service Mesh (ASM) for ATS, complete the following procedure:

**Note**

By default, this feature is disabled.

1. If ASM is not enabled on the global level for the namespace, run the following command before deploying ATS:

```
kubectl label --overwrite namespace <namespace_name> istio-  
injection=enabled
```

Example:

```
kubectl label --overwrite namespace seppsvc istio-injection=enabled
```

2. Add the following annotations in the **BDD client** section in the `ocats-sepp-custom-values.yaml` file to support ASM:  
To enable or disable the ASM, update the `asmEnabled` flag to true or false.

```
asmEnabled: false  
asm:  
  configMgrPort: 9092  
  stubServerPort: 8080  
  plmnIgWPort: 80  
  n32IgWPort: 80
```

3. Add the following value in the **stub-server** section in the `ocats-sepp-custom-values.yaml` file to support ASM:  
To enable or disable the ASM, update the `asmEnabled` flag to true or false.

```
asmEnabled: false
```

4. For asm deployment, set the `atsCommunicationTLSEnabled` flag to false as given below:

```
atsCommunicationTLSEnabled: false  
#If set to true, ATS will get necessary variables to communicate with  
SUT, Stub or other NFs with TLS enabled. It is not required in ASM  
environment.
```

5. (Optional) The user can configure the resources assigned to the Aspen Mesh (istio-proxy) sidecars in `ocats_ocsepp_values_<version>.yaml` file sections as follows:

```
asm:
istioResources:
  limits:
    cpu: 2
    memory: 1Gi
  requests:
    cpu: 100m
    memory: 128Mi
```

**Note**

It is recommended to use the default values of the resources.

6. In `ocats_ocsepp_values_<version>.yaml` file, parameter `expose_tls_service` in `stubserver` section should be configured to `false` in ASM mode to deploy stub server in HTTP mode.

```
stubserver:
  service:
    expose_tls_service: false
```

**Note**

- If the SEPP is deployed with ASM enabled and user disables the ASM on the global level, then user needs to redeploy the setup to work without ASM.
- At present, SEPP is not supporting the mediation in ASM environment. If user has deployed the mediation service, run the following command before triggering the ATS suite to delete the mediation service:

```
kubectl delete svc <release-name>-nf-mediation -n <namespace>
kubectl delete deploy <release-name>-nf-mediation -n
<namespace>
```

### 3.7.5.2 ATS API

The application programming interface (API) feature provides APIs to perform routine ATS tasks such as starting the ATS suite, monitoring and stopping the ATS suite etc.

By default, this feature is enabled in `ocats_ocsepp_values_<version>.yaml` file.

```
bddclient:
  atsFeatures:
    atsApi: true
```

For more details about the ATS API feature, refer to [ATS API](#) feature section.

### 3.7.5.3 Enabling Static Port

To enable static port:

**Note**

ATS supports static port. By default, this feature is disabled.

- In the `ocats_ocsepp_values_<version>.yaml` file under service section, set the **staticNodePortEnabled** parameter value to 'true' and **staticNodePort** parameter value with valid nodePort.

```
service:
  customExtension:
    labels: {}
    annotations: {}
  type: LoadBalancer
  ports:
    https:
      port: "8443"
      staticNodePortEnabled: false
      staticNodePort: ""
    http:
      port: "8080"
      staticNodePortEnabled: false
      staticNodePort: ""
```

### 3.7.5.4 Enabling Roaming Hub Mode

SEPP ATS supports two types deployment modes:

- SEPP
- Roaming Hub or Hosted SEPP Mode

Flag has been introduced to select the deployment mode.

#Flag to enable Roaming Hub mode

RHenabled: True

### 3.7.5.5 Enabling Hosted SEPP Mode

The Hosted SEPP Mode can be enabled as follows:

#Flag to enable Hosted SEPP mode

RHenabled: True

### Customizing Error Code Variable in Hosted SEPP Mode

For handling failure scenarios in Hosted SEPP mode, the following customized error code variable has been introduced:

#Customized error code variable for Hosted SEPP

```
HSErrCode: "400"
```

## 3.7.5.6 Configuring Egress Rate Limiting Feature

If the Egress Rate Limiting feature is enabled in SEPP deployment, to run the Egress Rate Limiter test cases in ATS, `EgressRateLimiterFlag` parameter has been introduced in the `ocats-sepp-custom-values.yaml` file. If the Egress Rate Limiting feature is disabled in SEPP deployment, ensure to set `EgressRateLimiterFlag` parameter to false.

```
EgressRateLimiterFlag: true/false
```

For more information about the feature, see the "Rate Limiting for Egress Roaming Signaling per PLMN" section in *Oracle Communications Cloud Native Core, Security Edge Protection Proxy User Guide* and the "Configuration Parameters" section in *Oracle Communications Cloud Native Core, Security Edge Protection Proxy Installation, Upgrade, and Fault Recovery Guide*.

## 3.7.5.7 Configuring Ingress Rate Limiting Feature

If the Ingress rate limiting feature is enabled in SEPP deployment, to run the Ingress rate limiter test cases in ATS, `IngressRateLimiterFlag` parameter has been introduced in the `ocats_ocsepp_values_<version>.yaml` file. If the Ingress rate limiting feature is disabled in SEPP deployment, ensure to set `IngressRateLimiterFlag` parameter to false.

Flag to enable or disable Egress Rate Limiter:

```
IngressRateLimiterFlag: true/false
```

For more information about the feature, see the "Rate Limiting for Ingress Roaming Signaling per Remote SEPP Set" section in *Oracle Communications Cloud Native Core, Security Edge Protection Proxy User Guide* and the "Configuration Parameters" section in *Oracle Communications Cloud Native Core, Security Edge Protection Proxy Installation, Upgrade, and Fault Recovery Guide*.

## 3.7.5.8 Configuring the Cache Refresh Timeout Value

SEPP supports Refresh ahead cache. To run the ATS cases, `cacheRefreshTimeout` value must be set to 1000 (ms) so that cache can be updated automatically after every test case is executed when ATS suite is triggered.

To set the cache refresh timeout value:

In the *ocsepp-custom-values.yaml* file, under *cn32f-svc* and *pn32f-svc* microservices, set the *cacheRefreshTimeout* parameter value to 1000 (ms).

```
configs:
  cacheRefreshTimeout: 1000 #(ms)
  cacheRefreshInitTimeout: 50000 #(ms)
```

**Note**

If ATS is not configured, the *cacheRefreshTimeout* value must be 30000 (ms).

### 3.7.5.9 Configuring the Topology Cache Refresh Timeout Value

SEPP supports Refresh ahead cache. To run the ATS cases, *topologycacheRefreshTimeout* value must be set to 1000 (ms) so that cache can be updated automatically after every test case is executed when ATS suite is triggered.

In the *ocsepp-custom-values.yaml* file, under *cn32f-svc* and *pn32f-svc* microservices, set the *topologycacheRefreshTimeout* parameter value to 1000 (ms).

```
topologyHiding:
  timerConfig:
    topologyhidingCacheRefreshTimeout: 30000
    topologyhidingCacheRefreshInitTimeout: 50000
    topologyhidingHistoryUpdateTimeout: 30000
    topologyhidingHistoryRefreshSeconds: 60
  config:
    topologyHidingStateCheck: true
```

### 3.7.5.10 Configuring the Security Counter Measure Cache Refresh Timeout

SEPP supports Refresh ahead cache. To run the ATS cases, you must set the value of the *securityCacheRefreshTimeout* parameter to 10 (ms) so that cache can be automatically updated after every test case is run when ATS suite is triggered.

In the *ocsepp-custom-values.yaml* file, under *cn32f-svc* and *pn32f-svc* microservices, set the *Security Counter Measure Cache Refresh Timeout* parameter value to 1000 (ms).

```
configs:
  securityCacheRefreshTimeout: 1000 #(ms)
```

```
securityCacheRefreshInitTimeout: 50000 #(ms)
```

### 3.7.5.11 Configuring the n32cHandshakePlmnIdListValidationEnabled

SEPP supports validation of PLMN ID List in n32c capability exchange message which can be turned off. To run the ATS cases, n32cHandshakePlmnIdListValidationEnabled value must be set to true so that testcases validating PLMN ID List in n32c capability exchange message can be run successfully when ATS suite is triggered.

To set the n32cHandshakePlmnIdListValidationEnabled value:

In the ocsepp\_custom\_values\_<version>.yaml file, under localProfile, set the n32cHandshakePlmnIdListValidationEnabled parameter value to true.

```
localProfile:
  name: "SEPP-3"
  plmnIdList: [{"mcc": "111", "mnc": "100"}, {"mcc": "111", "mnc": "101"},
{"mcc": "111", "mnc": "102"}, {"mcc": "111", "mnc": "103"}, {"mcc": "111", "mnc": "104"},
{"mcc": "111", "mnc": "105"}, {"mcc": "111", "mnc": "106"}, {"mcc": "111", "mnc": "107"},
{"mcc": "111", "mnc": "108"}, {"mcc": "111", "mnc": "109"}, {"mcc": "111", "mnc": "110"},
{"mcc": "111", "mnc": "111"}, {"mcc": "111", "mnc": "112"}, {"mcc": "111", "mnc": "113"},
{"mcc": "111", "mnc": "114"}, {"mcc": "111", "mnc": "115"}, {"mcc": "111", "mnc": "116"},
{"mcc": "111", "mnc": "117"}, {"mcc": "111", "mnc": "118"}, {"mcc": "111", "mnc": "119"},
{"mcc": "111", "mnc": "120"}, {"mcc": "111", "mnc": "121"}, {"mcc": "111", "mnc": "122"},
{"mcc": "111", "mnc": "123"}, {"mcc": "111", "mnc": "124"}, {"mcc": "111", "mnc": "125"},
{"mcc": "111", "mnc": "126"}, {"mcc": "111", "mnc": "127"}, {"mcc": "111", "mnc": "128"},
{"mcc": "111", "mnc": "129"}]
  # Do not change this value, this will be always true
  sbiTargetApiRootSupported: true
  # Enable PLMN ID List Validation in Exchange Capability Request, Default
  set to true
  n32cHandshakePlmnIdListValidationEnabled: true
  # PLMN ID List Validation Type in Exchange Capability Request, can be
  SUBSET or STRICT only
  n32cHandshakePlmnIdListValidationType: "SUBSET"
```

Update following PLMN ID list in localProfile section for SEPP mode to run the ATS testcases:

```
[{"mcc": "111", "mnc": "100"}, {"mcc": "111", "mnc": "101"},
{"mcc": "111", "mnc": "102"}, {"mcc": "111", "mnc": "103"}, {"mcc": "111", "mnc": "104"},
{"mcc": "111", "mnc": "105"}, {"mcc": "111", "mnc": "106"}, {"mcc": "111", "mnc": "107"},
{"mcc": "111", "mnc": "108"}, {"mcc": "111", "mnc": "109"}, {"mcc": "111", "mnc": "110"},
{"mcc": "111", "mnc": "111"}, {"mcc": "111", "mnc": "112"}, {"mcc": "111", "mnc": "113"},
{"mcc": "111", "mnc": "114"}, {"mcc": "111", "mnc": "115"}, {"mcc": "111", "mnc": "116"},
{"mcc": "111", "mnc": "117"}, {"mcc": "111", "mnc": "118"}, {"mcc": "111", "mnc": "119"},
{"mcc": "111", "mnc": "120"}, {"mcc": "111", "mnc": "121"}, {"mcc": "111", "mnc": "122"},
{"mcc": "111", "mnc": "123"}, {"mcc": "111", "mnc": "124"}, {"mcc": "111", "mnc": "125"},
```

```
{ "mcc": "111", "mnc": "126"}, { "mcc": "111", "mnc": "127"}, { "mcc": "111", "mnc": "128"},  
{ "mcc": "111", "mnc": "129"}]
```

Update following PLMN ID list in localProfile section for Roaming Hub mode to run the ATS testcases:

[illegible]

[illegible]



```
{
  "mcc": "111", "mnc": "514"}, {"mcc": "111", "mnc": "515"}, {"mcc": "111", "mnc": "516"},
  {"mcc": "111", "mnc": "517"}, {"mcc": "111", "mnc": "518"}, {"mcc": "111", "mnc": "519"},
  {"mcc": "111", "mnc": "520"}, {"mcc": "111", "mnc": "521"}, {"mcc": "111", "mnc": "522"},
  {"mcc": "111", "mnc": "523"}, {"mcc": "111", "mnc": "524"}, {"mcc": "111", "mnc": "525"},
  {"mcc": "111", "mnc": "526"}, {"mcc": "111", "mnc": "527"}, {"mcc": "111", "mnc": "528"},
  {"mcc": "111", "mnc": "529"}, {"mcc": "111", "mnc": "530"}, {"mcc": "111", "mnc": "531"},
  {"mcc": "111", "mnc": "532"}, {"mcc": "111", "mnc": "533"}, {"mcc": "111", "mnc": "534"},
  {"mcc": "111", "mnc": "535"}, {"mcc": "111", "mnc": "536"}, {"mcc": "111", "mnc": "537"},
  {"mcc": "111", "mnc": "538"}, {"mcc": "111", "mnc": "539"}, {"mcc": "111", "mnc": "540"},
  {"mcc": "111", "mnc": "541"}, {"mcc": "111", "mnc": "542"}, {"mcc": "111", "mnc": "543"},
  {"mcc": "111", "mnc": "544"}, {"mcc": "111", "mnc": "545"}, {"mcc": "111", "mnc": "546"},
  {"mcc": "111", "mnc": "547"}, {"mcc": "111", "mnc": "548"}, {"mcc": "111", "mnc": "549"},
  {"mcc": "111", "mnc": "550"}, {"mcc": "111", "mnc": "551"}, {"mcc": "111", "mnc": "552"},
  {"mcc": "111", "mnc": "553"}, {"mcc": "111", "mnc": "554"}, {"mcc": "111", "mnc": "555"},
  {"mcc": "111", "mnc": "556"}, {"mcc": "111", "mnc": "557"}, {"mcc": "111", "mnc": "558"},
  {"mcc": "111", "mnc": "559"}, {"mcc": "111", "mnc": "560"}, {"mcc": "111", "mnc": "561"},
  {"mcc": "111", "mnc": "562"}, {"mcc": "111", "mnc": "563"}, {"mcc": "111", "mnc": "564"},
  {"mcc": "111", "mnc": "565"}, {"mcc": "111", "mnc": "566"}, {"mcc": "111", "mnc": "567"},
  {"mcc": "111", "mnc": "568"}, {"mcc": "111", "mnc": "569"}, {"mcc": "111", "mnc": "570"},
  {"mcc": "111", "mnc": "571"}, {"mcc": "111", "mnc": "572"}, {"mcc": "111", "mnc": "573"},
  {"mcc": "111", "mnc": "574"}, {"mcc": "111", "mnc": "575"}, {"mcc": "111", "mnc": "576"},
  {"mcc": "111", "mnc": "577"}, {"mcc": "111", "mnc": "578"}, {"mcc": "111", "mnc": "579"},
  {"mcc": "111", "mnc": "580"}, {"mcc": "111", "mnc": "581"}, {"mcc": "111", "mnc": "582"},
  {"mcc": "111", "mnc": "583"}, {"mcc": "111", "mnc": "584"}, {"mcc": "111", "mnc": "585"},
  {"mcc": "111", "mnc": "586"}, {"mcc": "111", "mnc": "587"}, {"mcc": "111", "mnc": "588"},
  {"mcc": "111", "mnc": "589"}, {"mcc": "111", "mnc": "590"}, {"mcc": "111", "mnc": "591"},
  {"mcc": "111", "mnc": "592"}, {"mcc": "111", "mnc": "593"}, {"mcc": "111", "mnc": "594"},
  {"mcc": "111", "mnc": "595"}, {"mcc": "111", "mnc": "596"}, {"mcc": "111", "mnc": "597"},
  {"mcc": "111", "mnc": "598"}, {"mcc": "111", "mnc": "599"}]
```

### 3.7.5.12 Request Timeout

SEPP Supports requestTimeout parameter to avoid the request timeout of services. The requestTimeout is increased in the given services to avoid any request timeout that may happen due to the processing of response by the stub server.

- The user has to set requestTimeout to 2000 in the cn32f-svc, pn32f-svc, plmn-egress-gateway, n32-egress-gateway, and n32-ingress-gateway sections of the ocsepp\_custom\_values\_<version>.yaml file.
- The user has to set requestTimeout to 5000 in the n32-ingress-gateway section of the ocsepp\_custom\_values\_<version>.yaml file.

requestTimeout: 2000 #(ms)

#### Note

- If the ATS cases are failing due to the request timeout, increase the request timeout of a particular service which is creating the issue. For example set request timeout to "5000".
- If ATS is not configured, requestTimeout must be set to the following values:

**Table 3-26 requestTimeout**

| Service             | REQUEST TIMEOUT |
|---------------------|-----------------|
| cn32f-svc           | 2000            |
| pn32f-svc           | 1100            |
| plmn-egress-gateway | 1000            |
| n32-egress-gateway  | 1500            |
| n32-ingress-gateway | 700             |

**Updating n32-ingress-gateway config map**

In the `ocsepp_custom_values.yaml` file, under `n32-ingress-gateway` section, set the `requestTimeout` parameter value to 5000 (ms) for updating the config map.

```

routesConfig:
- id: n32f
  #Below field is used to provide an option to enable/disable route level
  xfccHeaderValidation, it will override global configuration for
  xfccHeaderValidation.enabled
  metadata:
    requestTimeout: 1200

```

### 3.7.5.13 Idle Timeout

The Idle timeout must be increased in the given services to avoid any pending request transaction to timeout due to its idle state in the request queue.

In the `ocsepp_custom_values_<version>.yaml` file, under `n32-ingress-gateway` section, set the `jettyIdleTimeout` parameter value to 5000(ms).

```

#Jetty Idle Timeout Settings (ms)
jettyIdleTimeout: 5000 #(ms)

```

**Note**

- If the ATS is not configured, the `jettyIdleTimeout` value should be 3000 (ms).
- If the ATS cases are failing due to the request timeout, increase idle timeout of a particular service which is failing. For example set idle timeout to "5000".

### 3.7.5.14 EvictSanHeaderCacheDelay

The SEPP supports `evictSanHeaderCacheDelay` to update the cache on the PN32F service with the updated values of Remote SEPP and Remote SEPP set associated with the SAN header.

The user has to set `evictSanHeaderCacheDelay` parameter to 100 in `pn32f-svc` microservice section of custom yaml file.

```
configs:
  evictSanHeaderCacheDelay: 100 #(ms)
```

**Note**

If ATS is not configured `evictSanHeaderCacheDelay` must be set to 50000 in the `pn32f-svc` section of `ocsepp_custom_values_<version>.yaml` file.

### 3.7.5.15 Configuring the Reroute Attempts for Egress Gateway

The `attempts` parameter is used in alternate routing, when the request has to be routed to multiple SEPP.

Under config manager section in `ocsepp_custom_values_<version>.yaml` file, the default value for `attempts` is set to 0. Set `attempts` to 3 before running ATS test execution.

```
alternateRoute:
  sbiReRoute:
    sbiRoutingErrorActionSets: [{"id": "action_0", "action": "reroute",
    "attempts": 3, "blacklist": {"enabled": false, "duration": 60000}}]
```

### 3.7.5.16 NRF Discovery Cache Refresh Timeout

The `nrfDiscoveryCacheRefreshTimeout` parameter defines the timer value when the UDR Discovery request is triggered if coherence map containing UDR Profile information is empty. After this timer expiry, UDR Discovery request will be initiated by NRF Client towards NRF.

In `ocsepp_custom_values_<version>.yaml` file, under `pn32f-svc` section, set the `nrfDiscoveryCacheRefreshTimeout` parameter value to 1000 (ms).

```
configs:
  nrfDiscoveryCacheRefreshTimeout: 1000 #(ms)
```

**Note**

To run the Cat-3 testcases, user must have preinstalled coherence service while SEPP installation.

### 3.7.5.17 Configuring Alternate Routing based on the DNS SRV Record for Home Network Functions

The Alternate Routing based on the DNS SRV Record for Home Network Functions feature can be enabled as follows:

Update the following parameters in `ocsepp_custom_values.yaml` file to configure the DNS SRV feature:

At Global Section:

```
global:
  alternateRouteServiceEnable : true
```

At Alternate route section:

```
alternate-route:
  global:
    alternateRouteServiceEnable: true
```

Update the Target host:

```
alternate-route:  #Static virtual FQDN Config
  staticVirtualFqdns:
    - name: https://sepp.ats.test.routing.com
      alternateFqdns:
        #Below Target FQDNs needs to be updated for ATS DNS SRV scenarios
        - target: <ats-release-name>-stubserver
          port: 8443
          priority: 100
          weight: 90
        - target: <ats-release-name>-stubserver-2
          port: 8443
          priority: 100
          weight: 10
        - target: <ats-release-name>-stubserver-3
          port: 8443
          priority: 1
          weight: 90
```

Here, update the target parameter with the user-specific ATS release name.

Example: If the user defines the <ats-release-name> as sepp-ats-rel and <stub-server-name> as stubserver, then update the target as sepp-ats-rel-stubserver.

#### ① Note

For DNS SRV and SOR features, the plmn-egress-gateway must be deployed in REST mode. In the `ocsepp_custom_values.yaml` file, update:

```
plmn-egress-gateway:
  routeConfigMode: REST
```

**Note**

In DNS SRV feature, the rerouting to next peer is decided on the basis of error codes or exceptions. If some exception arises which is not present in the json file `DNSSRVCriteriaSet.json` (may cause scenario failures), user must add those exceptions in the exceptions list at the following paths:

In the file `/var/lib/jenkins/ocsepp_tests/data/DNSSRVCriteriaSet.json`, update

```
"exceptions": [
  "java.net.SocketException",
  "java.nio.channels.ClosedChannelException"
]
```

In the file `/var/lib/jenkins/ocsepp_tests/cust_data/DNSSRVCriteriaSet.json`, update

```
"exceptions": [
  "java.net.SocketException",
  "java.nio.channels.ClosedChannelException"
]
```

### 3.7.5.18 Configuring Load Sharing among Multiple Remote SEPP Nodes

The load sharing among multiple Remote SEPP nodes feature can be configured as follows:

1. Enable the following parameters in `ocsepp_custom_values.yaml` file to configure the load sharing feature:

- a. Enable the following flag at `alternate_route` section:

```
alternate-route:
  global:
    alternateRouteServiceEnable: true
```

- b. Replace the release name of the Target host:

```
alternate-route:  #Static virtual FQDN Config
staticVirtualFqdns:
- name: http://sepp.ats.loadsharing.com
  alternateFqdns:
  #Below Target FQDNs needs to be updated for ATS DNS SRV scenarios
- target: <ats-release-name>-stubserver
  port: 8443
  priority: 100
  weight: 90
- target: <ats-release-name>-stubserver-2
  port: 8443
  priority: 100
  weight: 10
- target: <ats-release-name>-stubserver-3
  port: 8443
```

```
priority: 1  
weight: 90
```

**Note**

If the user has chosen the ats release name as sepp-ats-rel  
Modify  
target: <release-name>-stubserver with actual release name of ATS  
deployment.  
Example: sepp-ats-rel-stubserver

2. Enable the following parameter at NrfClient Global parameters:

```
alternateRouteServiceEnable: true
```

### 3.7.5.19 Enabling Persistent Volume Storage

ATS supports Persistent storage to retain ATS historical build execution data, test cases, and one-time environment variable configurations.

**Note**

By default, this feature is disabled.

To enable persistent storage:

1. Create a PVC and associate the same to the ATS pod.
2. Set the **PVEnabled** flag to **true**.
3. Set **PVClaimName** to PVC that is created for ATS.

```
bddclient:  
  PVEnabled: false  
  PVClaimName: "sepp-pvc"
```

For more details on Persistent Volume Storage, you can refer to [Persistent Volume for 5G ATS](#)

### 3.7.6 Deploying ATS in Kubernetes Cluster

**Note**

It is important to ensure that all the three components; ATS, Stub and SEPP are in the same namespace.

If the namespace does not exist, run the following command to create a namespace:

```
kubectl create namespace ocsepp
```

### Deploying ATS:

```
helm install -name <release_name> ocats-sepp-23.4.0.tgz --namespace  
<namespace_name> -f <values-yaml-file>
```

Example:

```
helm install -name ocats ocats-sepp-23.4.0.tgz --namespace ocsepp -f ocats-  
sepp-custom-values.yaml
```

## 3.7.7 Verifying ATS Deployment

Run the following command to verify ATS deployment:

```
helm status <release_name>
```

Checking Pod Deployment:

```
kubectl get pod -n seppsvc
```

Checking Service Deployment:

```
kubectl get service -n seppsvc
```

**Figure 3-20 Checking Pod and Service Deployment**

```
sepp-ats-rel-bddclient          LoadBalancer  10.233.24.74    10.75.152.26    8080:32385/TCP
sepp-ats-rel-bddclient          21h
sepp-ats-rel-stubserver        LoadBalancer  10.233.32.171   10.75.153.203    8080:32312/TCP,8091:32115/T
CP,8443:32550/TCP  21h
sepp-ats-rel-stubserver-2      LoadBalancer  10.233.27.4     10.75.153.146    8080:32045/TCP,8091:32171/T
CP,8443:30155/TCP  21h
sepp-ats-rel-stubserver-3      LoadBalancer  10.233.29.122   10.75.152.153    8080:31926/TCP,8091:31699/T
CP,8443:32407/TCP  21h
```

**Figure 3-21 Checking Service Deployment**

```
[root@ocne-1-8-4-cluster-mohit184-bastion-1 cloud-user]# kubectl get po -n sepp | grep ats
sepp-ats-rel-bddclient-595b7d66b9-k76zj      1/1      Running      0      31s
sepp-ats-rel-stubserver-2-d9f6dc6f-4f4t5     1/1      Running      0      21s
sepp-ats-rel-stubserver-3-6cb9f99f6-wxf8k     1/1      Running      0      16s
sepp-ats-rel-stubserver-6f4785b7d4-7tbq9     1/1      Running      0      11d
[root@ocne-1-8-4-cluster-mohit184-bastion-1 cloud-user]#
```

### 3.7.8 Post Installation Steps (If persistent volume is used)

If persistent volume is used, follow the post-installation steps as mentioned in the [Persistent Volume for 5G ATS](#) section.

## 3.8 Installing ATS for UDR

Before installing ATS for UDR, it is important to ensure the resource requirements are met. For information about the resource requirements, see [Resource Requirements](#).

The UDR ATS installation procedure includes:

1. [Locating and downloading the ATS images](#)
2. [Preparing to Deploy ATS and Stub Pods](#)
3. [Loading UDR ATS Images](#)
4. [Loading UDR Stub Images in the SLF-NewFeatures or SLF-Regression Pipeline](#)
5. [Loading UDR Stub Images in the UDR-NewFeatures or UDR-Regression Pipeline](#)
6. [Configuring ATS](#)
  - [Configuring static port](#)
  - [Configuring UDR Part of Label](#)
  - [Enabling Persistent Storage](#)
  - [Settings for Oauth2 test cases](#)
  - [IPv6 on ATS and NRF-Stub](#)
  - [Configuring Health-Check pipeline](#)
  - [Service account requirements](#)
  - [Configuring service mesh](#)
7. [Deploying ATS in Kubernetes Cluster](#)
8. [Deploying Stub Pods in Kubernetes Cluster](#)
9. [Verifying UDR-ATS Deployment](#)
10. [Post-Installation Steps](#)

### 3.8.1 Resource Requirements

ATS resource requirements for UDR, SLF, and EIR are as follows:

**Table 3-27 UDR - Total Number of Resources**

| Resource Name       | vCPUs | Memory (GB) | Storage (GB) |
|---------------------|-------|-------------|--------------|
| UDR SUT Totals      | 39    | 39          | 34           |
| DB Tier Totals      | 20    | 41          | 37           |
| ATS Totals          | 17    | 12          | 0            |
| Grand Total UDR-ATS | 76    | 92          | 71           |



**Table 3-28 SLF - Total Number of Resources**

| Resource Name       | vCPUs (excluding sidecar) | vCPUs (including sidecar) | Memory (GB) (excluding sidecar) | Memory (including sidecar) | Storage (GB) |
|---------------------|---------------------------|---------------------------|---------------------------------|----------------------------|--------------|
| SLF-SUT Totals      | 83                        | 113                       | 83                              | 114                        | 64           |
| DB Tier Totals      | 20                        | 41                        | 28                              | 53                         | 37           |
| ATS Totals          | 8                         | 11                        | 6                               | 8                          | 0            |
| Grand Total SLF-ATS | 111                       | 165                       | 117                             | 175                        | 98           |

**Table 3-29 EIR - Total Number of Resources**

| Resource Name       | vCPUs | Memory (GB) | Storage (GB) |
|---------------------|-------|-------------|--------------|
| EIR SUT Totals      | 25    | 25          | 19           |
| DB Tier Totals      | 20    | 41          | 37           |
| ATS Totals          | 7     | 6           | 0            |
| Grand Total EIR-ATS | 52    | 72          | 59           |

**Table 3-30 UDR Operational Resource Requirements**

| Microservice               | vCPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|----------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|---------------------------|------------------------|------------------------------|-----------------------------------|
| ocudr-ingressgateway-sig   | 2                      | 2                            | 1 GB                              | 2                             | 1                         | 2                      | 2                            | 1                                 |
| ocudr-ingressgateway-prov  | 2                      | 2                            | 1 GB                              | 2                             | 1                         | 2                      | 2                            | 1                                 |
| ocudr-nudr-dr-service      | 1                      | 1                            | 1 GB                              | 2                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-dr-prov-service | 1                      | 1                            | 1 GB                              | 2                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-notify-service  | 1                      | 1                            | 1 GB                              | 2                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-oc-diam-gateway      | 1                      | 1                            | 1 GB                              | 2                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-diameter-proxy  | 1                      | 1                            | 1 GB                              | 2                             | 1                         | 1                      | 1                            | 1                                 |

Table 3-30 (Cont.) UDR Operational Resource Requirements

| Microservice                                            | vCPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|---------------------------------------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|---------------------------|------------------------|------------------------------|-----------------------------------|
| ocudr-egressgateway                                     | 2                      | 2                            | 1 GB                              | 1                             | 1                         | 2                      | 2                            | 1                                 |
| ocudr-nudr-config                                       | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-config-server                                | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-nrf-client-nfmanagement                      | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-appinfo                                           | 0.5                    | 1                            | 1 GB                              | 1                             | 1                         | 0.5                    | 1                            | 1                                 |
| ocudr-alternate-route                                   | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-migration                                    | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-bulk-import                                  | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-ondemand-migration                           | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-performance                                       | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-performance-prov                                  | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| UDR Additional Resources (Hooks/Init/Update Containers) | -                      | -                            | -                                 | -                             | -                         | 6                      | 6                            | 6                                 |
| provgw-prov-ingressgateway                              | 2                      | 2                            | 0                                 | 2                             | 1                         | 2                      | 2                            | 1                                 |

Table 3-30 (Cont.) UDR Operational Resource Requirements

| Microservice                                               | vCPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|------------------------------------------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|---------------------------|------------------------|------------------------------|-----------------------------------|
| provgw-provgw-service                                      | 1                      | 1                            | 0                                 | 2                             | 1                         | 1                      | 1                            | 1                                 |
| provgw-provgw-config                                       | 1                      | 1                            | 0                                 | 1                             | 1                         | 1                      | 1                            | 1                                 |
| provgw-provgw-config-server                                | 1                      | 1                            | 0                                 | 1                             | 1                         | 1                      | 1                            | 1                                 |
| provgw-prov-egressgateway                                  | 2                      | 2                            | 0                                 | 2                             | 1                         | 2                      | 2                            | 1                                 |
| Provgw Additional Resources (Hooks/Init/Update Containers) | -                      | -                            | -                                 | -                             | -                         | 5                      | 5                            | 5                                 |
| UDR-SUT Total (UDR and ProvGw)                             | -                      | -                            | -                                 | -                             | -                         | 39                     | 39                           | 34                                |

Table 3-31 SLF Operational Resource Requirements

| Microservice             | vCPUs Required per Pod (excluding sidecar) | vCPUs required for sidecar container per pod | Memory Required per Pod (GB) (excluding sidecar) | Memory required for sidecar container per pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total (excludes sidecar) | vCPUs Required - Total (includes sidecar) | Memory Required - Total (GB) (excludes sidecar) | Memory Required - Total (GB) (includes sidecar) | Storage PVC Required - Total (GB) |
|--------------------------|--------------------------------------------|----------------------------------------------|--------------------------------------------------|----------------------------------------------------|-----------------------------------|-------------------------------|---------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------------|-------------------------------------------------|-----------------------------------|
| ocudr-ingressgateway-sig | 2                                          | 0.5                                          | 2                                                | 0.5                                                | 1 GB                              | 2                             | 1                         | 2                                         | 2.5                                       | 2                                               | 2.5                                             | 1                                 |

Table 3-31 (Cont.) SLF Operational Resource Requirements

| Micro service                      | vCPUs Required per Pod (excluding sidecar) | vCPUs required for sidecar container per pod | Memory Required per Pod (GB) (excluding sidecar) | Memory required for sidecar container per pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total (excludes sidecar) | vCPUs Required - Total (includes sidecar) | Memory Required - Total (GB) (excludes sidecar) | Memory Required - Total (GB) (includes sidecar) | Storage PVC Required - Total (GB) |
|------------------------------------|--------------------------------------------|----------------------------------------------|--------------------------------------------------|----------------------------------------------------|-----------------------------------|-------------------------------|---------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------------|-------------------------------------------------|-----------------------------------|
| ocudr-ingressgateway-prov          | 2                                          | 0.5                                          | 2                                                | 0.5                                                | 1 GB                              | 2                             | 1                         | 2                                         | 2.5                                       | 2                                               | 2.5                                             | 1                                 |
| ocudr-nudr-dr-service              | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 2                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| ocudr-nudr-dr-prov-service         | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 2                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| ocudr-ingressgateway               | 2                                          | 0.5                                          | 2                                                | 0.5                                                | 1 GB                              | 2                             | 1                         | 2                                         | 2.5                                       | 2                                               | 2.5                                             | 1                                 |
| ocudr-nudr-config                  | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| ocudr-nudr-config-server           | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| ocudr-nudr-nrf-client-nfmanagement | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| ocudr-appinfo                      | 0.5                                        | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 0.5                                       | 1                                         | 1                                               | 1.5                                             | 1                                 |
| ocudr-alternate-route              | 2                                          | 0.5                                          | 2                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 2                                         | 2.5                                       | 2                                               | 2.5                                             | 1                                 |

Table 3-31 (Cont.) SLF Operational Resource Requirements

| Micro service                                           | vCPUs Required per Pod (excluding sidecar) | vCPUs required for sidecar container per pod | Memory Required per Pod (GB) (excluding sidecar) | Memory required for sidecar container per pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total (excludes sidecar) | vCPUs Required - Total (includes sidecar) | Memory Required - Total (GB) (excludes sidecar) | Memory Required - Total (GB) (includes sidecar) | Storage PVC Required - Total (GB) |
|---------------------------------------------------------|--------------------------------------------|----------------------------------------------|--------------------------------------------------|----------------------------------------------------|-----------------------------------|-------------------------------|---------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------------|-------------------------------------------------|-----------------------------------|
| ocudr-nudr-bulk-import                                  | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| ocudr-performanc                                        | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| ocudr-performanc-prov                                   | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| ocudr-nudr-export-tool                                  | 2                                          | 1                                            | 2                                                | 1                                                  | 3 GB                              | 1                             | 1                         | 2                                         | 3                                         | 2                                               | 3                                               | 3                                 |
| SLF Additional Resources (Hooks/Init/Update Containers) | -                                          | -                                            | -                                                | -                                                  | -                                 | -                             | -                         | 6                                         | 7                                         | 6                                               | 7                                               | 3                                 |
| provgw-prov-ingressgateway                              | 2                                          | 0.5                                          | 2                                                | 0.5                                                | 1 GB                              | 2                             | 1                         | 2                                         | 2.5                                       | 2                                               | 2.5                                             | 1                                 |
| provgw-prov-egressgateway                               | 2                                          | 0.5                                          | 2                                                | 0.5                                                | 1 GB                              | 2                             | 1                         | 2                                         | 2.5                                       | 2                                               | 2.5                                             | 1                                 |

Table 3-31 (Cont.) SLF Operational Resource Requirements

| Micro service                                               | vCPUs Required per Pod (excluding sidecar) | vCPUs required for sidecar container per pod | Memory Required per Pod (GB) (excluding sidecar) | Memory required for sidecar container per pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total (excludes sidecar) | vCPUs Required - Total (includes sidecar) | Memory Required - Total (GB) (excludes sidecar) | Memory Required - Total (GB) (includes sidecar) | Storage PVC Required - Total (GB) |
|-------------------------------------------------------------|--------------------------------------------|----------------------------------------------|--------------------------------------------------|----------------------------------------------------|-----------------------------------|-------------------------------|---------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------------|-------------------------------------------------|-----------------------------------|
| provg w-provg w-service                                     | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 2                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| provg w-provg w-config                                      | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| provg w-provg w-config - server                             | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| provg w-auditor-service                                     | 1                                          | 0.5                                          | 1                                                | 0.5                                                | 1 GB                              | 1                             | 1                         | 1                                         | 1.5                                       | 1                                               | 1.5                                             | 1                                 |
| Provg w Additional Resources (Hooks/Init/Update Containers) | -                                          | -                                            | -                                                | -                                                  | -                                 | -                             | -                         | 5                                         | 6                                         | 5                                               | 6                                               | 3                                 |

**Table 3-31 (Cont.) SLF Operational Resource Requirements**

| Microservice                             | vCPUs Required per Pod (excluding sidecar) | vCPUs required for sidecar container per pod | Memory Required per Pod (GB) (excluding sidecar) | Memory required for sidecar container per pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total (excludes sidecar) | vCPUs Required - Total (includes sidecar) | Memory Required - Total (GB) (excludes sidecar) | Memory Required - Total (GB) (includes sidecar) | Storage PVC Required - Total (GB) |
|------------------------------------------|--------------------------------------------|----------------------------------------------|--------------------------------------------------|----------------------------------------------------|-----------------------------------|-------------------------------|---------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------------|-------------------------------------------------|-----------------------------------|
| SLF-SUT Total Required (SLFs and ProvGw) | -                                          | -                                            | -                                                | -                                                  | -                                 | -                             | -                         | 83                                        | 113                                       | 83                                              | 114                                             | 64                                |

**Table 3-32 EIR Operational Resource Requirements**

| Microservice               | vCPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|----------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|---------------------------|------------------------|------------------------------|-----------------------------------|
| ocudr-ingressgateway-sig   | 2                      | 2                            | 1 GB                              | 2                             | 1                         | 2                      | 2                            | 1                                 |
| ocudr-ingressgateway-prov  | 2                      | 2                            | 1 GB                              | 2                             | 1                         | 2                      | 2                            | 1                                 |
| ocudr-nudr-dr-service      | 1                      | 1                            | 1 GB                              | 2                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-dr-prov-service | 1                      | 1                            | 1 GB                              | 2                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-ingressgateway       | 2                      | 2                            | 1 GB                              | 2                             | 1                         | 2                      | 2                            | 1                                 |
| ocudr-nudr-config          | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-config-server   | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |

Table 3-32 (Cont.) EIR Operational Resource Requirements

| Microservice                                            | vCPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|---------------------------------------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|---------------------------|------------------------|------------------------------|-----------------------------------|
| ocudr-nudr-nrf-client-nfmanagement                      | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-appinfo                                           | 0.5                    | 1                            | 1 GB                              | 1                             | 1                         | 0.5                    | 1                            | 1                                 |
| ocudr-alternate-route                                   | 2                      | 2                            | 1 GB                              | 1                             | 1                         | 2                      | 2                            | 1                                 |
| ocudr-nudr-bulk-import                                  | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-performance                                       | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-performance-prov                                  | 1                      | 1                            | 1 GB                              | 1                             | 1                         | 1                      | 1                            | 1                                 |
| ocudr-nudr-export-tool                                  | 2                      | 2                            | 3 GB                              | 1                             | 1                         | 2                      | 2                            | 3                                 |
| EIR Additional Resources (Hooks/Init/Update Containers) | -                      | -                            | -                                 | -                             | -                         | 6                      | 6                            | 3                                 |
| EIR-SUT Total Required                                  | -                      | -                            | -                                 | -                             | -                         | 25                     | 25                           | 19                                |

Table 3-33 ATS Resource Requirements for UDR mode

| Microservice           | vCPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment)    | vCPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|------------------------------|------------------------|------------------------------|-----------------------------------|
| ATS Behave             | 4                      | 4                            | 0                                 | -                             | 1                            | 4                      | 4                            | 0                                 |
| NRF-Stub (python stub) | 2                      | 1                            | 0                                 | -                             | 2 (Two separate deployments) | 4                      | 2                            | 0                                 |



Table 3-33 (Cont.) ATS Resource Requirements for UDR mode

| Microservice              | vCPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment)      | vCPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|---------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|--------------------------------|------------------------|------------------------------|-----------------------------------|
| Notify-Stub (python stub) | 2                      | 1                            | 0                                 | -                             | 3 (Three separate deployments) | 6                      | 3                            | 0                                 |
| diam-stub                 | 1                      | 1                            | 0                                 | -                             | 2 (Two separate deployments)   | 2                      | 2                            | 0                                 |
| fourg-stub                | 1                      | 1                            | 0                                 | -                             | 1                              | 1                      | 1                            | 0                                 |
| ATS Totals                | -                      | -                            | -                                 | -                             | -                              | 17                     | 12                           | 0                                 |

Table 3-34 ATS Resource Requirements for SLF Mode

| Microservice       | vCPUs Required per Pod (excluding sidecar) | vCPUs required for sidecar container per pod | Memory Required per Pod (GB) (excluding sidecar) | Memory required for sidecar container per pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment)    | vCPUs Required - Total (excludes sidecar) | vCPUs Required - Total (includes sidecar) | Memory Required - Total (GB) (excludes sidecar) | Memory Required - Total (GB) (includes sidecar) | Storage PVC Required - Total (GB) |
|--------------------|--------------------------------------------|----------------------------------------------|--------------------------------------------------|----------------------------------------------------|-----------------------------------|-------------------------------|------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------------|-------------------------------------------------|-----------------------------------|
| ocats-udr          | 4                                          | 2                                            | 4                                                | 1                                                  | 0                                 | 1                             | 1                            | 4                                         | 6                                         | 4                                               | 5                                               | 0                                 |
| nrf-ocstub-python  | 2                                          | .5                                           | 1                                                | .5                                                 | 0                                 | 1                             | 2 (Two separate deployments) | 4                                         | 5                                         | 2                                               | 3                                               | 0                                 |
| ATS Total required | -                                          | -                                            | -                                                | -                                                  | -                                 | -                             | -                            | 8                                         | 11                                        | 6                                               | 8                                               | 0                                 |

Table 3-35 ATS Resource Requirements for EIR mode

| Microservice | vCPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|--------------|------------------------|------------------------------|-----------------------------------|-------------------------------|---------------------------|------------------------|------------------------------|-----------------------------------|
| ocats-udr    | 3                      | 4                            | 0                                 | 1                             | 1                         | 3                      | 4                            | 0                                 |

Table 3-35 (Cont.) ATS Resource Requirements for EIR mode

| Microservice                        | vCPUs Required per Pod | Memory Required per Pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment)    | vCPUs Required - Total | Memory Required - Total (GB) | Storage PVC Required - Total (GB) |
|-------------------------------------|------------------------|------------------------------|-----------------------------------|-------------------------------|------------------------------|------------------------|------------------------------|-----------------------------------|
| nrf-ocstub-python (For deployments) | 2                      | 1                            | 0                                 | 1                             | 2 (Two separate deployments) | 4                      | 2                            | 0                                 |
| ATS Total required                  | -                      | -                            | -                                 | -                             | -                            | 7                      | 6                            | 0                                 |

**Note**

ATS total resource calculation includes 2 nrf-stub deployments and 1 ATS deployment.

Table 3-36 UDR DB Tier Pods

| Micro service name              | Container name         | Number of Pods | vCPUs Requirement Per Pod | Memory Requirement Per Pod | PVC Requirement                | Total Resources           |
|---------------------------------|------------------------|----------------|---------------------------|----------------------------|--------------------------------|---------------------------|
| Management node                 | mysqlndbcluster        | 2              | 2 CPUs                    | 5 GB                       | 3*2 → 6 GB                     | 4 CPUs<br>10 GB Memory    |
| Data node                       | mysqlndbcluster        | 2              | 2 CPUs                    | 4 GB                       | 8*2 → 16 GB                    | 5 CPUs<br>9 GB Memory     |
|                                 | db-backup-executor-svc |                | 100m CPU                  | 128 MB                     |                                |                           |
| APP SQL node                    | mysqlndbcluster        | 2              | 2 CPUs                    | 5 GB                       | 3*2 → 6 GB                     | 5 CPUs<br>10.5 GB Memory  |
|                                 | init-sidecar           |                | 100m CPU                  | 256 MB                     |                                |                           |
| SQL node (Used for Replication) | mysqlndbcluster        | 2              | 2 CPUs                    | 5 GB                       | 3*2 → 6 GB                     | 5 CPUs<br>10.5 GB Memory  |
|                                 | init-sidecar           |                | 100m CPU                  | 256 MB                     |                                |                           |
| DB Monitor Service              | db-monitor-svc         | 1              | 200m CPUs                 | 500 MB                     | -                              | 0.5 CPUs<br>0.5 GB Memory |
| DB Backup Manager Service       | replication-svc        | 1              | 200m CPU                  | 500 MB                     | -                              | 0.5 CPUs<br>0.5 GB Memory |
| Total                           | -                      | -              | -                         | -                          | 34+3 (Replication Svc) → 37 GB | 20 CPUs<br>41 GB Memory   |

**Table 3-37 SLF DB Tier Pods**

| Micro service name              | Container name         | Number of Pods | vCPUs Requirement Per Pod | Memory Requirement Per Pod | PVC Requirement                | Total Resources         |
|---------------------------------|------------------------|----------------|---------------------------|----------------------------|--------------------------------|-------------------------|
| Management node                 | mysqlndbcluster        | 2              | 2 CPUs                    | 5 GB                       | 3*2 → 6 GB                     | 8 CPUs<br>12 GB Memory  |
|                                 | istio-proxy            |                | 2 CPUs                    | 1 GB                       |                                |                         |
| Data node                       | mysqlndbcluster        | 2              | 2 CPUs                    | 4 GB                       | 8*2 → 16 GB                    | 9 CPUs<br>11 GB Memory  |
|                                 | istio-proxy            |                | 2 CPUs                    | 1 GB                       |                                |                         |
|                                 | db-backup-executor-svc |                | 100m CPU                  | 128 MB                     |                                |                         |
| APP SQL node                    | mysqlndbcluster        | 2              | 2 CPUs                    | 5 GB                       | 3*2 → 6 GB                     | 9 CPUs<br>13 GB Memory  |
|                                 | init-sidecar           |                | 100m CPU                  | 256 MB                     |                                |                         |
|                                 | istio-proxy            |                | 2 CPUs                    | 1 GB                       |                                |                         |
| SQL node (Used for Replication) | mysqlndbcluster        | 2              | 2 CPUs                    | 5 GB                       | 3*2 → 6 GB                     | 9 CPUs<br>13 GB Memory  |
|                                 | init-sidecar           |                | 100m CPU                  | 256 MB                     |                                |                         |
|                                 | istio-proxy            |                | 2 CPUs                    | 1 GB                       |                                |                         |
| DB Monitor Service              | db-monitor-svc         | 1              | 200m CPUs                 | 500 MB                     | -                              | 3 CPUs<br>2 GB Memory   |
|                                 | istio-proxy            |                | 2 CPUs                    | 1 GB                       |                                |                         |
| DB Backup Manager Service       | replication-svc        | 1              | 200m CPU                  | 500 MB                     | -                              | 3 CPUs<br>2 GB Memory   |
|                                 | istio-proxy            |                | 2 CPUs                    | 1 GB                       |                                |                         |
| Total                           | -                      | -              | -                         | -                          | 34+3 (Replication Svc) → 37 GB | 41 CPUs<br>53 GB Memory |

**Table 3-38 EIR DB Tier Pods**

| Micro service name              | Container name         | Number of Pods | vCPUs Requirement Per Pod | Memory Requirement Per Pod | PVC Requirement | Total Resources          |
|---------------------------------|------------------------|----------------|---------------------------|----------------------------|-----------------|--------------------------|
| Management node                 | mysqlndbcluster        | 2              | 2 CPUs                    | 5 GB                       | 3*2 → 6 GB      | 4 CPUs<br>10 GB Memory   |
| Data node                       | mysqlndbcluster        | 2              | 2 CPUs                    | 4 GB                       | 8*2 → 16 GB     | 5 CPUs<br>9 GB Memory    |
|                                 | db-backup-executor-svc |                | 100m CPU                  | 128 MB                     |                 |                          |
| APP SQL node                    | mysqlndbcluster        | 2              | 2 CPUs                    | 5 GB                       | 3*2 → 6 GB      | 5 CPUs<br>10.5 GB Memory |
|                                 | init-sidecar           |                | 100m CPU                  | 256 MB                     |                 |                          |
| SQL node (Used for Replication) | mysqlndbcluster        | 2              | 2 CPUs                    | 5 GB                       | 3*2 → 6 GB      | 5 CPUs<br>10.5 GB Memory |
|                                 | init-sidecar           |                | 100m CPU                  | 256 MB                     |                 |                          |

Table 3-38 (Cont.) EIR DB Tier Pods

| Micro service name        | Container name  | Number of Pods | vCPUs Requirement Per Pod | Memory Requirement Per Pod | PVC Requirement                   | Total Resources         |
|---------------------------|-----------------|----------------|---------------------------|----------------------------|-----------------------------------|-------------------------|
| DB Monitor Service        | db-monitor-svc  | 1              | 200m CPUs                 | 500 MB                     | -                                 | 1 CPUs<br>1 GB Memory   |
| DB Backup Manager Service | replication-svc | 1              | 200m CPU                  | 500 MB                     | -                                 | 1 CPUs<br>1 GB Memory   |
| Total                     | -               | -              | -                         | -                          | 34+3<br>(Replication Svc) → 37 GB | 20 CPUs<br>41 GB Memory |

Table 3-39 SLF Performance based Resource Details

| -                        | vCPUs (excluding sidecar)                 | vCPUs (including sidecar)           | Memory (GB) (excluding sidecar)                  | Memory (GB) (including sidecar)                    | Storage (GB)                      | -                             | -                         | -                                         | -                                         | -                                                | -                                                | -                                 |
|--------------------------|-------------------------------------------|-------------------------------------|--------------------------------------------------|----------------------------------------------------|-----------------------------------|-------------------------------|---------------------------|-------------------------------------------|-------------------------------------------|--------------------------------------------------|--------------------------------------------------|-----------------------------------|
| SLF-SUT Totals           | 58                                        | 105                                 | 46                                               | 93                                                 | 22                                | -                             | -                         | -                                         | -                                         | -                                                | -                                                | -                                 |
| DB Tier Totals           | 40                                        | 80                                  | 40                                               | 80                                                 | 20                                | -                             | -                         | -                                         | -                                         | -                                                | -                                                | -                                 |
| ATS Totals               | 6                                         | 4                                   | 1                                                | 3                                                  | 0                                 | -                             | -                         | -                                         | -                                         | -                                                | -                                                | -                                 |
| Grand Total SLF-ATS      | 104                                       | 193                                 | 94                                               | 183                                                | 42                                | -                             | -                         | -                                         | -                                         | -                                                | -                                                | -                                 |
| Micro service            | CPUs Required per Pod (excluding sidecar) | CPUs required for sidecar container | Memory Required per Pod (GB) (excluding sidecar) | Memory required for sidecar container per pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | CPUs Required - Total (excluding sidecar) | CPUs Required - Total (including sidecar) | Memory Required - Total (GB) (excluding sidecar) | Memory Required - Total (GB) (including sidecar) | Storage PVC Required - Total (GB) |
| ocudr-ingressgateway-sig | 6                                         | 4                                   | 4                                                | 4                                                  | 1 GB                              | 2                             | 2                         | 12                                        | 20                                        | 8                                                | 16                                               | 2                                 |

Table 3-39 (Cont.) SLF Performance based Resource Details

| -                                                          | vCPU<br>s<br>(excl<br>uding<br>sidec<br>ar) | vCPU<br>s<br>(inclu<br>ding<br>sidec<br>ar) | Mem<br>ory<br>(GB)<br>(excl<br>uding<br>sidec<br>ar) | Mem<br>ory<br>(GB)<br>(inclu<br>ding<br>sidec<br>ar) | Stora<br>ge<br>(GB) | - | - | -  | -  | - | -  | - |
|------------------------------------------------------------|---------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------|---------------------|---|---|----|----|---|----|---|
| ocudr-<br>ingres<br>sgate<br>way-<br>prov                  | 6                                           | 4                                           | 4                                                    | 4                                                    | 1 GB                | 2 | 2 | 12 | 20 | 8 | 16 | 2 |
| ocudr-<br>nudr-<br>drserv<br>ice                           | 5                                           | 4                                           | 4                                                    | 4                                                    | 1 GB                | 2 | 2 | 10 | 18 | 8 | 16 | 2 |
| ocudr-<br>nudr-<br>dr-<br>provs<br>ervice                  | 5                                           | 4                                           | 4                                                    | 4                                                    | 1 GB                | 2 | 2 | 10 | 18 | 8 | 16 | 2 |
| ocudr-<br>egres<br>sgate<br>way                            | 1                                           | 2                                           | 1                                                    | 2                                                    | 1 GB                | 1 | 1 | 1  | 3  | 1 | 3  | 1 |
| ocudr-<br>nudr-<br>config                                  | 1                                           | 1                                           | 1                                                    | 1                                                    | 1 GB                | 1 | 1 | 1  | 2  | 1 | 2  | 1 |
| ocudr-<br>nudr-<br>config<br>-<br>server                   | 1                                           | 1                                           | 1                                                    | 1                                                    | 1 GB                | 1 | 1 | 1  | 2  | 1 | 2  | 1 |
| ocudr-<br>nudr-<br>nrf-<br>client-<br>nfman<br>agem<br>ent | 1                                           | 1                                           | 1                                                    | 1                                                    | 1 GB                | 1 | 1 | 1  | 2  | 1 | 2  | 1 |
| ocudr-<br>appinf<br>o                                      | 1                                           | 1                                           | 1                                                    | 1                                                    | 1 GB                | 1 | 1 | 1  | 2  | 1 | 2  | 1 |
| ocudr-<br>altern<br>ate-<br>route                          | 1                                           | 1                                           | 1                                                    | 1                                                    | 1 GB                | 1 | 1 | 1  | 2  | 1 | 2  | 1 |
| ocudr-<br>perfor<br>manc<br>e                              | 1                                           | 1                                           | 1                                                    | 1                                                    | 1 GB                | 1 | 1 | 1  | 2  | 1 | 2  | 1 |

Table 3-39 (Cont.) SLF Performance based Resource Details

| -                                                                                           | vCPU<br>s<br>(excl<br>uding<br>sidec<br>ar) | vCPU<br>s<br>(inclu<br>ding<br>sidec<br>ar) | Mem<br>ory<br>(GB)<br>(excl<br>uding<br>sidec<br>ar) | Mem<br>ory<br>(GB)<br>(inclu<br>ding<br>sidec<br>ar) | Stora<br>ge<br>(GB)        | -                                | - | -  | -   | -  | -  | -  |
|---------------------------------------------------------------------------------------------|---------------------------------------------|---------------------------------------------|------------------------------------------------------|------------------------------------------------------|----------------------------|----------------------------------|---|----|-----|----|----|----|
| ocudr-<br>perfor<br>manc<br>e-prov                                                          | 1                                           | 1                                           | 1                                                    | 1                                                    | 1 GB                       | 1                                | 1 | 1  | 2   | 1  | 2  | 1  |
| Additi<br>onal<br>SLF<br>Resou<br>rces<br>(Hook<br>s/Init/<br>Updat<br>e<br>Contai<br>ners) | -                                           | -                                           | -                                                    | -                                                    | -                          | -                                | - | 6  | 12  | 6  | 12 | 6  |
| SLF<br>SUT<br>Totals                                                                        | -                                           | -                                           | -                                                    | -                                                    | -                          | -                                | - | 58 | 105 | 46 | 93 | 22 |
| Micro<br>servic<br>e                                                                        | Contai<br>ner                               | Numb<br>er of<br>Pods                       | CPU<br>Requi<br>remen<br>t Per<br>Pod                | Memo<br>ry<br>Requi<br>remen<br>t Per<br>Pod         | PVC<br>Requi<br>remen<br>t | Total<br>Resou<br>rces           | - | -  | -   | -  | -  | -  |
| Mana<br>geme<br>nt<br>node                                                                  | mysql<br>ndbcl<br>uster                     | 2                                           | 2<br>CPUs                                            | 5 GB                                                 | 3*2 →<br>6 GB              | 8<br>CPUs<br>12 GB<br>Memo<br>ry | - | -  | -   | -  | -  | -  |
|                                                                                             | istio-<br>proxy                             |                                             | 2<br>CPUs                                            | 1 GB                                                 |                            |                                  |   |    |     |    |    |    |
| Data<br>node                                                                                | mysql<br>ndbcl<br>uster                     | 2                                           | 2<br>CPUs                                            | 4 GB                                                 | 8*2 →<br>16 GB             | 9<br>CPUs<br>11 GB<br>Memo<br>ry | - | -  | -   | -  | -  | -  |
|                                                                                             | istio-<br>proxy                             |                                             | 2<br>CPUs                                            | 1 GB                                                 |                            |                                  |   |    |     |    |    |    |
|                                                                                             | db-<br>backu<br>p-<br>execut<br>or-svc      |                                             | 100m<br>CPU                                          | 128<br>MB                                            |                            |                                  |   |    |     |    |    |    |
| APP<br>SQL<br>node                                                                          | mysql<br>ndbcl<br>uster                     | 2                                           | 2<br>CPUs                                            | 5 GB                                                 | 3*2 →<br>6 GB              | 9<br>CPUs<br>13 GB<br>Memo<br>ry | - | -  | -   | -  | -  | -  |
|                                                                                             | init-<br>sideca<br>r                        |                                             | 100m<br>CPU                                          | 256<br>MB                                            |                            |                                  |   |    |     |    |    |    |
|                                                                                             | istio-<br>proxy                             |                                             | 2<br>CPUs                                            | 1 GB                                                 |                            |                                  |   |    |     |    |    |    |

Table 3-39 (Cont.) SLF Performance based Resource Details

| -                                                | vCPUs<br>(excluding<br>sidecar) | vCPUs<br>(including<br>sidecar) | Memory<br>(GB)<br>(excluding<br>sidecar) | Memory<br>(GB)<br>(including<br>sidecar) | Storage<br>(GB) | -                                 | - | - | - | - | -                                               | -                                  |
|--------------------------------------------------|---------------------------------|---------------------------------|------------------------------------------|------------------------------------------|-----------------|-----------------------------------|---|---|---|---|-------------------------------------------------|------------------------------------|
| SQL<br>node<br>(Used<br>for<br>Replica-<br>tion) | mysql<br>ndbcl<br>uster         | 2                               | 2<br>CPUs                                | 5 GB                                     | 3*2 →<br>6 GB   | 9<br>CPUs<br>13 GB<br>Memo-<br>ry | - | - | - | - | -                                               | -                                  |
|                                                  | init-<br>sidecar                |                                 | 100m<br>CPU                              | 256<br>MB                                |                 |                                   |   |   |   |   |                                                 |                                    |
|                                                  | istio-<br>proxy                 |                                 | 2<br>CPUs                                | 1 GB                                     |                 |                                   |   |   |   |   |                                                 |                                    |
| DB<br>Monit<br>or<br>Servic<br>e                 | db-monit<br>or-svc              | 1                               | 200m<br>CPUs                             | 1 GB                                     | -               | 3<br>CPUs<br>2 GB<br>Memo-<br>ry  | - | - | - | - | -                                               | -                                  |
|                                                  | istio-<br>proxy                 |                                 | 2<br>CPUs                                | 500<br>MB                                |                 |                                   |   |   |   |   |                                                 |                                    |
| DB<br>Backu<br>p<br>Mana<br>ger<br>Servic<br>e   | replic-<br>ation-<br>svc        | 1                               | 200m<br>CPU                              | 500<br>MB                                | -               | 3<br>CPUs<br>2 GB<br>Memo-<br>ry  | - | - | - | - | -                                               | -                                  |
|                                                  | istio-<br>proxy                 |                                 | 2<br>CPUs                                | 1 GB                                     |                 |                                   |   |   |   |   |                                                 |                                    |
| Total                                            | -                               | -                               | -                                        | -                                        | -               | -                                 | - | - | - | - | 34+3(<br>Replica-<br>tion<br>Svc)<br>→ 37<br>GB | 41<br>CPUs<br>53 GB<br>Memo-<br>ry |

Table 3-40 ATS and stub requirement for SLF Performance

| Micro<br>servi-<br>ce | vCPUs<br>Requi-<br>red<br>per<br>Pod<br>(excl-<br>uding<br>sidecar) | vCPUs<br>requi-<br>red<br>for<br>sidecar<br>conta-<br>iner<br>per<br>pod | Mem-<br>ory<br>Requi-<br>red<br>per<br>Pod<br>(GB)<br>(excl-<br>uding<br>sidecar) | Mem-<br>ory<br>requi-<br>red<br>for<br>sidecar<br>conta-<br>iner<br>per<br>pod(<br>GB) | Stora-<br>ge<br>PVC<br>Requi-<br>red<br>per<br>Pod<br>(GB) | Repli-<br>cas<br>(regul-<br>ar<br>deplo-<br>ymen-<br>t) | Repli-<br>cas<br>(ATS<br>deplo-<br>ymen-<br>t) | vCPUs<br>Requi-<br>red -<br>Total<br>(excl-<br>udes<br>sidecar) | vCPUs<br>Requi-<br>red -<br>Total<br>(inclu-<br>des<br>sidecar) | Mem-<br>ory<br>Requi-<br>red -<br>Total<br>(GB)<br>(inclu-<br>des<br>sidecar) | Mem-<br>ory<br>Requi-<br>red -<br>Total<br>(GB)<br>(inclu-<br>des<br>sidecar) | Stora-<br>ge<br>PVC<br>Requi-<br>red -<br>Total<br>(GB) |
|-----------------------|---------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------|
| ocats-<br>udr         | 6                                                                   | 2                                                                        | 8                                                                                 | 2                                                                                      | 0                                                          | 1                                                       | 1                                              | 6                                                               | 8                                                               | 8                                                                             | 10                                                                            | 0                                                       |

Table 3-40 (Cont.) ATS and stub requirement for SLF Performance

| Micro service      | vCPUs Required per Pod (excluding sidecar) | vCPUs required for sidecar container per pod | Memory Required per Pod (GB) (excluding sidecar) | Memory required for sidecar container per pod (GB) | Storage PVC Required per Pod (GB) | Replicas (regular deployment) | Replicas (ATS deployment) | vCPUs Required - Total (excludes sidecar) | vCPUs Required - Total (includes sidecar) | Memory Required - Total (GB) (includes sidecar) | Memory Required - Total (GB) (includes sidecar) | Storage PVC Required - Total (GB) |
|--------------------|--------------------------------------------|----------------------------------------------|--------------------------------------------------|----------------------------------------------------|-----------------------------------|-------------------------------|---------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------------|-------------------------------------------------|-----------------------------------|
| ATS Total required | -                                          | -                                            | -                                                | -                                                  | -                                 | -                             |                           | 6                                         | 8                                         | 8                                               | 10                                              | 0                                 |

## 3.8.2 Locating and Downloading ATS Image

To locate and download the ATS Image from MOS:

1. Log in to [My Oracle Support](#) using appropriate credentials.
2. Select the **Patches & Updates** tab.
3. In the **Patch Search** window, click **Product or Family (Advanced)**.
4. Enter *Oracle Communications Cloud Native Core - 5G* in the **Product** field.
5. Select *Oracle Communications Cloud Native Core Unified Data Repository <release\_number>* from the **Release** drop-down.
6. Click **Search**. The **Patch Advanced Search Results** list appears.
7. Select the required ATS patch from the list. The **Patch Details** window appears.
8. Click **Download**. The **File Download** window appears.
9. Click the **<p\*\*\*\*\*\_<release\_number>\_Tekelec>.zip** file.
10. Untar the zip file to access all the ATS images. The `ocats_udr_pkg_24_2_7_0_0.tgz` file has following files:
  - `ocats_udr_pkg_24_2_7_0_0.tgz`
  - `ocats_udr_pkg_24_2_7_0_0-README.txt`
  - `ocats_udr_pkg_24_2_7_0_0.tgz.sha256`
  - `ocats-udr-custom-configtemplates-24.2.7.0.0.zip`
  - `ocats-udr-custom-configtemplates-24.2.7.0.0-README.txt`
  - `ocats_udr_pkg_24_2_7_0_0.mcafee.sw_packaging.log`

The `ocats_udr_pkg_24_2_7_0_0.tgz` file contains:

```
|_ _ ocats-udr-ats-pkg-24.2.7.tgz
|
|      |_ _ _ _ _ ocats-udr-24.2.7.tgz (Helm Charts)
```



```

|      |_ _ _ _ _ ocats-udr-images-24.2.7.tar(Docker Images)
|      |_ _ _ _ _ OCATS-UDR-Readme.txt
|      |_ _ _ _ _ ocats-udr-24.2.7.tgz.sha256
|      |_ _ _ _ _ ocats-udr-images-24.2.7.tar.sha256
|      |_ _ _ _ _ ocats-udr-data-24.2.7.tgz
|      |_ _ _ _ _ ocats-udr-data-24.2.7.tgz.sha256
|_ _ ocats-udr-stub-pkg-24.2.7.tgz
      |_ _ _ _ _ ocstub-py-24.2.7.tgz (Helm Charts)
      |_ _ _ _ _ fourg-stub-24.2.7.tgz (Helm Charts)
      |_ _ _ _ _ diam-stub-24.2.7.tgz (Helm Charts)
      |_ _ _ _ _ ocstub-py-24.2.7.tar(Docker Images)
      |_ _ _ _ _ ocats-udr-fourg-stub-images-24.2.7.tar(Docker Images)
      |_ _ _ _ _ ocats-udr-diam-stub-images-24.2.7.tar(Docker Images)
      |_ _ _ _ _ OCATS-UDR-STUB-Readme.txt
      |_ _ _ _ _ ocstub-py-24.2.7.tgz.sha256
      |_ _ _ _ _ fourg-stub-24.2.7.tgz.sha256
      |_ _ _ _ _ diam-stub-24.2.7.tgz.sha256
      |_ _ _ _ _ ocstub-py-24.2.7.tar.sha256
      |_ _ _ _ _ ocats-udr-fourg-stub-images-24.2.7.tar.sha256
      |_ _ _ _ _ ocats-udr-diam-stub-images-24.2.7.tar.sha256

```

The ocats-udr-custom-configtemplates-24.2.7.0.0.zip file contains:

ocats-udr-custom-configtemplates-24.2.7.0.0.zip

```

      |_ _ _ _ _ ocats-udr-custom-values-24.2.7.yaml(Custom values for
UDR-ATS)

```

```

      |_ _ _ _ _ ocstub-py-custom-values-24.2.7.yaml (Custom values for
COMMON-PYTHON-STUB)

```

```

      |_ _ _ _ _ fourg-stub-custom-values-24.2.7.yaml (Custom values for
FOURG-STUB)

```

```

      |_ _ _ _ _ diam-stub-custom-values-24.2.7.yaml(Custom values for
DIAMETER-STUB)

```

Copy the `ocats_uds_pkg_24_2_7_0_0.tgz` tar file and `ocats-uds-custom-configtemplates-24.2.7.0.0.zip` file to OCCNE, OCI, or Kubernetes cluster, where you want to deploy ATS.

### 3.8.3 Preparing to Deploy ATS and Stub Pods

To deploy ATS and stub pods in Kubernetes cluster:

#### ① Note

Deploy ATS and Subscriber Location Function (SLF) in the same namespace.

- [Loading UDR ATS Images](#)
- Loading UDR Stub Images
  - [SLF-NewFeatures or SLF-Regression pipeline](#)
  - [UDR-NewFeatures or UDR-Regression](#)

### 3.8.4 Loading UDR ATS Image

To load UDR ATS image:

1. Run the following command to extract the tar file content.  

```
tar -xvf ocats_uds_pkg_24_2_7_0_0.tgz
```

The output of this command is:

  - `ocats-uds-ats-pkg-24.2.7.tgz`
  - `ocats-uds-stub-pkg-24.2.7.tgz`
2. Run the following command to extract the helm charts and docker images of ATS.  

```
tar -xvf ocats-uds-ats-pkg-24.2.7.tgz
```

The output of this command is:

  - `ocats-uds-24.2.7.tgz`
  - `ocats-uds-images-24.2.7.tar`
  - `ocats-uds-data-24.2.7.tgz`
3. Run the following command to extract the helm charts and docker images of ATS.  

```
tar -xvf ocats-uds-stub-pkg-24.2.7.tgz
```

The output of this command is:

  - `ocstub-py-24.2.7.tgz` (Helm charts)
  - `fourg-stub-24.2.7.tgz` (Helm charts)
  - `diam-stub-24.2.7.tgz` (Helm charts)
  - `ocats-uds-notify-stub-images-24.2.7.tar` (Docker image)
  - `ocats-uds-fourg-stub-images-24.2.7.tar` (Docker Images)
  - `ocats-uds-diam-stub-images-24.2.7.tar` (Docker Images)
  - `ocstub-py-24.2.7.tar` (Docker image)

The `ocats-udr-images-24.2.7.tar` file contains docker images (`ocats-udr-images-24.2.7.tar`) of ATS for UDR 24.2.7.

4. Run the following command in your cluster to load the ATS image.

```
docker load --input ocats-udr-images-24.2.7.tar
```

**Note**

For CNE 1.8.0 and above, you can use Podman instead of Docker. See the following sample Podman command:

```
sudo podman load --input ocats-udr-images-24.2.7.tar
```

5. Run the following commands to tag and push the ATS image to your registry.

```
docker tag ocats-udr-images:24.2.7 <registry>/ocats-udr-images:24.2.7
```

```
docker push <registry>/ocats-udr-images:24.2.7
```

In the previous command, `<registry>` is the name of docker image repository.

**Note**

For CNE 1.8.0 and above, you can use Podman instead of Docker to tag and push the Docker image. Run the following sample Podman command to tag and push Docker image:

```
sudo podman tag ocats-udr-images:24.2.7 <customer repo>/ <image name>:<image version>
```

```
sudo podman push <customer repo>/<image name>:<image version>
```

6. Run the following command to untar the helm charts (`ocats-udr-24.2.7.tgz`) and update the registry name, image name, and tag (if required) in the `ocats-udr-custom-values-24.2.7.yaml` file.

```
tar -xvf ocats-udr-24.2.7.tgz
```

Output:

```
ocats-udr/Chart.yaml
```

```
ocats-udr/values.yaml
```

```
ocats-udr/templates/NOTES.txt
```

```
ocats-udr/templates/_helpers.tpl
```

```
ocats-udr/templates/deployment.yaml
ocats-udr/templates/ingress.yaml
ocats-udr/templates/service.yaml
ocats-udr/templates/serviceaccount.yaml
```

Output:

```
ocats-udr
├── Chart.yaml
├── templates
│   ├── deployment.yaml
│   ├── _helpers.tpl
│   ├── ingress.yaml
│   ├── NOTES.txt
│   ├── serviceaccount.yaml
│   └── service.yaml
└── values.yaml
```

### 3.8.5 Loading UDR Stub Images in the SLF-NewFeatures, EIR-NewFeatures, SLF-Regression, or EIR-Regression Pipeline

To load the UDR stub images:

#### ① Note

For the SLF-NewFeatures, EIR-NewFeatures, or SLF-Regression pipeline, deploy only ocstub-py Helm chart. The ocstub-py-24.2.7.tar contains common-python-stub image (ocstub-py:24.2.7).

1. Run the following command to extract the tar file content.  
`tar -xvf ocats_udr_pkg_24_2_7_0_0.tgz`

The output of this command is:

- ocats-udr-ats-pkg-24.2.7.tgz
- ocats-udr-stub-pkg-24.2.7.tgz

2. Run the following command to extract the stub tar file content.  
`tar -xvf ocats-udr-stub-pkg-24.2.7.tgz`

The output of this command is:

- ocstub-py-24.2.7.tgz (Helm charts)
  - fourg-stub-24.2.7.tgz (Helm charts)
  - diam-stub-24.2.7.tgz (Helm charts)
  - ocats-udr-notify-stub-images-24.2.7.tar (Docker image)
  - ocats-udr-fourg-stub-images-24.2.7.tar (Docker Images)
  - ocats-udr-diam-stub-images-24.2.7.tar (Docker Images)
  - ocstub-py-24.2.7.tar (Docker image)
3. To load the UDR stub images (ocstub-py-24.2.7.tar) in the SLF-NewFeatures, EIR-NewFeatures, or SLF-Regression pipeline, run the following command in your cluster.

```
docker load --input ocstub-py-24.2.7.tar
```

4. Run the following commands to tag and push the stub image to your registry.

```
docker tag ocstub-py:24.2.7 <registry>/ocstub-py:24.2.7
```

```
docker push <registry>/ocstub-py:24.2.7
```

In the previous command, <registry> is the name of docker image repository.

5. Run the following command to untar the common python stub helm charts (ocstub-py-24.2.7.tgz) to get ocstub-py charts:

```
tar -xvf ocstub-py-24.2.7.tgz
```

Output:

```
ocstub-py/Chart.yaml
ocstub-py/values.yaml
ocstub-py/templates/_helpers.tpl
ocstub-py/templates/deployment.yaml
ocstub-py/templates/ingress.yaml
ocstub-py/templates/service.yaml
ocstub-py/templates/serviceaccount.yaml
ocstub-py/README.md
```

**Output:**

```
ocstub-py
├── Chart.yaml
├── templates
│   ├── deployment.yaml
│   ├── _helpers.tpl
│   ├── ingress.yaml
│   └── serviceaccount.yaml
```

```

|   └── service.yaml
|
└── values.yaml
|
└── README.md

```

### 3.8.6 Loading UDR Stub Images in the UDR-NewFeatures or UDR-Regression Pipeline

#### **Note**

- To run UDR-NewFeatures/UDR-Regression, ocstub-py, fourg-stub, and diam-stub must be deployed
- ocstub-py-24.2.7.tar contains common-python-stub image (ocstub-py:24.2.7)
- ocats-udr-fourg-stub-images-24.2.7.tar contains fourg-stub image (ocats-udr-fourg-stub-images:24.2.7)
- ocats-udr-diam-stub-images-24.2.7.tar contains diam-stub image (ocats-udr-diam-stub-images:24.2.7)

To load the UDR Stub Images:

1. Run the following command to extract the tar file content.  
tar -xvf ocats-udr-ats-pkg-24.2.7.tgz

The output of this command is:

- ocats-udr-ats-pkg-24.2.7.tgz
  - ocats-udr-stub-pkg-24.2.7.tgz
2. Run the following command to extract the stub tar file content.  
tar -xvf ocats-udr-stub-pkg-24.2.7.tgz
    - ocstub-py-24.2.7.tgz (Helm charts)
    - fourg-stub-24.2.7.tgz (Helm charts)
    - diam-stub-24.2.7.tgz (Helm charts)
    - ocats-udr-notify-stub-images-24.2.7.tar (Docker image)
    - ocats-udr-fourg-stub-images-24.2.7.tar(Docker Images)
    - ocats-udr-diam-stub-images-24.2.7.tar(Docker Images)
    - ocstub-py-24.2.7.tar (Docker image)
  3. Run the following commands in your cluster to load the stub images.

```

docker load --input ocstub-py-24.2.7.tar
docker load --input ocats-udr-fourg-stub-images-24.2.7.tar
docker load --input ocats-udr-diam-stub-images-24.2.7.tar

```

4. Run the following commands to tag and push the stub image to your registry.

```
docker tag ocstub-py:24.2.7 <registry>/ocstub-py:24.2.7
docker push <registry>/ocstub-py:24.2.7
docker tag ocats-udr-fourg-stub-images:24.2.7 <registry>/ocats-udr-
fourg-stub-images:24.2.7
docker push <registry>/ocats-udr-fourg-stub-images:24.2.7
docker tag ocats-udr-diam-stub-images:24.2.7 <registry>/ocats-udr-diam-
stub-images:24.2.7
docker push <registry>/ocats-udr-diam-stub-images:24.2.7
```

5. Run the following command to untar all the stub charts:

```
tar -xvf ocstub-py-24.2.7.tgz
tar -xvf fourg-stub-24.2.7.tgz
tar -xvf diam-stub-24.2.7.tgz
```

Output of each helm chart is as follows:

ocstub-py:

```
├── Chart.yaml
├── templates
│   ├── deployment.yaml
│   ├── _helpers.tpl
│   ├── ingress.yaml
│   ├── serviceaccount.yaml
│   └── service.yaml
├── values.yaml
└── README.md
```

fourg-stub

```
├── Chart.yaml
├── templates
│   ├── deployment.yaml
│   ├── _helpers.tpl
│   ├── ingress.yaml
│   ├── NOTES.txt
│   └── service.yaml
```

```
└── values.yaml

diam-stub
├── Chart.yaml
├── templates
│   ├── deployment.yaml
│   ├── _helpers.tpl
│   ├── ingress.yaml
│   ├── NOTES.txt
│   └── service.yaml
└── values.yaml
```

### 3.8.7 Configuring ATS

It is important to configure the following features before deploying ATS for UDR:

- [Configuring Docker Registry](#)
- [Enabling Static Port](#)
- [Enabling Persistent Volume](#)
- [Settings for OAuth2 Test Cases](#)
- [Enabling IPv6 on ATS](#)
- [Configuring ATS to Run Health-Check Pipeline](#)
- [Creating Service Account](#)
- [Enabling Service Mesh](#)
- [Configuring NRF Stub](#)
- [Configuring Notify Stub](#)
- [Configuring Fourg Stub](#)
- [Configuring Diameter Stub](#)

#### Note

- The deployment of notify-stub, fourg-stub, and diam-stub are not applicable to SLF pipelines.
- Service name used by each of the stubs must be unique for successful deployment.



### 3.8.7.1 Configuring Docker Registry

Update the docker registry file as follows:

```
image:  
  repository: <docker registry>:<docker port>/ocats-udr-images
```

### 3.8.7.2 Enabling Static Port

To enable static port:

#### ① Note

ATS supports static port. By default, this feature is not enabled.

In the ocats-udr-custom-values-24.2.7.yaml file under **service** section, set the `staticNodePortEnabled` parameter as `true` and `staticNodePort` parameter with valid `nodePort` value.

Here is a sample configuration for enabling static port in the ocats-udr-custom-values-24.2.7.yaml file:

```
service:  
  customExtension:  
    labels: {}  
    annotations: {}  
  type: LoadBalancer  
  port: "8080"  
  staticNodePortEnabled: true  
  staticNodePort: "31083"
```

### 3.8.7.3 Enabling Persistent Volume

To enable persistent volume, create a PVC and associate the same to the ATS pod.

#### ① Note

- For information about creating PVC, see [Persistent Volume for 5G ATS](#).
- For information about PVC size calculation, see [UDR Application Log Collection](#).

To enable persistent volume, set the following parameters in the values.yaml file:

1. Set the **PVEnabled** flag to 'true'.
2. Set **PVClaimName** to 'PVC' that user has created for ATS.

```
deployment:  
  customExtension:  
    labels: {}  
    annotations: {}
```

```
PVEnabled: true
PVClaimName: "ocats-udr-pvc"
```

### 3.8.7.4 Settings for OAuth2 Test Cases

UDR-ATS supports test cases that verifies OAuth2 validation scenarios at both UDR Provisioning Ingress Gateway and UDR Signaling Ingress Gateway. To run the OAuth2 related test cases on ATS:

1. Generate four ECDSA private keys in pem format (two each for UDR Provisioning Ingress Gateway and UDR Signaling Ingress Gateway) and enter the keys name in the **privateKey** field.
2. Generate four public certificates using the private keys (two each for UDR Provisioning Ingress Gateway and UDR Signaling Ingress Gateway) and enter the certificate names under **publicKey**.

#### Sample Commands to Generate ECDSA Private Keys and Certificates

```
openssl ecparam -genkey -name prime256v1 -noout -out ec_private_key1.pem
openssl pkcs8 -topk8 -in ec_private_key1.pem -inform pem -out
ec_private_key_pkcs8.pem -outform pem -nocrypt
openssl req -new -key ec_private_key_pkcs8.pem -x509 -nodes -days 365 -out
4bc0c762-0212-416a-bd94-b7f1fb348bd4.crt -subj "/C=IN/ST=KA/L=BLR/O=ORACLE/
OU=CGBU/CN=ocnrf-endpoint.ocnrf.svc.cluster.local"
```

#### Note

- You can configure the above mentioned inputs only if OAuth2 is configured on UDR. For information to configure OAuth2 on UDR, see the "Configuring OAuth2.0" section in the *Oracle Communications Cloud Native Core Unified Data Repository User Guide*.
- ATS configures Ingress Gateway with secret name, keyId, certificate name, and instanceId based on the inputs provided in the ocats-udr-custom-values-24.2.7.yaml file.
- ATS supports only ES256 algorithm to generate token for this release. User should generate ECDSA private key to test OAuth2 feature.

3. Update the ocats-udr-custom-values-24.2.7.yaml file with the public and private keys generated in the previous steps. A sample code snippet is as follows:

#### Sample: OAuth Configuration

```
deployment:  oauthKeys:
  - keyId: '664b344e74294c8fa5d2e7dffaaba407'
    udrSecret: 'oauthsecret1'
    privateKey: 'ec_private_key1.pem'
    publicKey: '4bc0c762-0212-416a-bd94-b7f1fb348bd4.crt'
    issuerId: '4bc0c762-0212-416a-bd94-b7f1fb348bd4'
    reqType: 'igw-sig'
  - keyId: '664b344e74294c8fa5d2e7dffaaba408'
    udrSecret: 'oauthsecret2'
    privateKey: 'ec_private_key2.pem'
    publicKey: '4bc0c762-0212-416a-bd94-b7f1fb348bd5.crt'
    issuerId: '4bc0c762-0212-416a-bd94-b7f1fb348bd5'
```

```

    reqType: 'igw-sig'
  - keyId: '664b344e74294c8fa5d2e7dfaaaba409'
    udrSecret: 'oauthsecret3'
    privateKey: 'ec_private_key3.pem'
    publicKey: '4bc0c762-0212-416a-bd94-b7f1fb348bd6.crt'
    issuerId: '4bc0c762-0212-416a-bd94-b7f1fb348bd6'
    reqType: 'igw-prov'
  - keyId: '664b344e74294c8fa5d2e7dfaaaba410'
    udrSecret: 'oauthsecret4'
    privateKey: 'ec_private_key4.pem'
    publicKey: '4bc0c762-0212-416a-bd94-b7f1fb348bd7.crt'
    issuerId: '4bc0c762-0212-416a-bd94-b7f1fb348bd7'
    reqType: 'igw-prov'

```

In the above code snippet,

- **issuerId** is any uuid that follows NfInstanceId format.
  - **keyId** is user-defined value.
  - **reqType** indicates the mapping between secret created and Ingress Gateway. igw-sig indicates secrets are to be used for UDR Signaling Ingress Gateway and igw-prov indicates UDR Provisioning Ingress Gateway.
4. Create four secrets in the namespace where ATS and UDR are installed, with public certificate and enter the value for the **udrSecret** field.

### 3.8.7.5 Enabling IPv6 on ATS

If you are deploying ATS setup on IPv6 system, then enable the following flag in the ocats-udr-custom-values.yaml file:

#### Enabling IPv6 on ATS

```

deployment:
  ipv6enabled: true

```

### 3.8.7.6 Configuring ATS to Run Health-Check Pipeline

To run the SLF-Health-Check, UDR-Health-Check, or EIR-HealthCheck features, provide the following inputs in the values.yaml file if ATS is being deployed on OCCNE.

```

deployment:
  webscale: false
  occnehostip: <base64 encoded occne bastion ip>
  occnehostusername: <base64 encoded occne login user name>
  occnehostpassword: <base64 encoded occne login password>

```

And, provide the following inputs to run the SLF-Health-Check, UDR-Health-Check, or EIR-HealthCheck features, if ATS is being deployed on Webscale.

```

deployment:
  webscale: true
  #Provide Webscale Environment details with base64 encoding
  webscalejumpserverip: <base64 encoded jump server ip>
  webscalejumpserverusername: <base64 encoded jump server username>

```

```

webscalejumpserverpassword: <base64 encoded jump server password>
webscaleprojectname: <base64 encoded webscale project name>
webscalelabserverFQDN: <base64 encoded lab server fqdn>
webscalelabserverport: <base64 encoded lab server port>
webscalelabserverusername: <base64 encoded lab server username>
webscalelabserverpassword: <base64 encoded lab server password>

```

You can configure the name of the secret that the ATS creates for healthcheck pipeline:

```
healthchecksecretname: ats-healthcheck-secret
```

For more information, see [ATS Health Check](#).

#### Note

UDR-ATS creates a secret with the name 'healthcheck-secret' on Kubernetes to store the above inputs.

### 3.8.7.7 Creating Service Account

To run SLF-ATS, it is mandatory to create a service account using the following inputs:

```

rules:
- apiGroups: ["apps"]
  resources: ["deployments", "replicasets", "deployments/scale", "statefulsets/
scale"]
  verbs: ["get", "watch", "list", "update"]
- apiGroups: [""]
  resources: ["pods", "deployments", "pods/log", "configmaps", "pods/exec"]
  verbs: ["get", "watch", "list", "update", "create"]

```

To run UDR-ATS, it is mandatory to create a service account using the following inputs:

```

rules:
- apiGroups: ["apps"]
  resources: ["deployments", "replicasets", "deployments/scale", "statefulsets/
scale"]
  verbs: ["get", "watch", "list", "update"]
- apiGroups: [""]
  resources: ["pods", "deployments", "pods/log", "configmaps", "pods/
exec", "services"]
  verbs: ["get", "watch", "list", "update", "create", "delete"]
- apiGroups: ["batch"]
  resources: ["jobs"]
  verbs: ["get", "create", "delete", "update", "list"]

```

**Note**

For information about creating service account, see the *Oracle Communications Cloud Native Core Unified Data Repository Installation and Upgrade Guide* available on MOS.

### 3.8.7.8 Enabling Service Mesh

**Note**

The UDR-NewFeatures, UDR-Regression, EIR-NewFeatures, and EIR-Regression pipelines do not support deployment on service mesh enabled system.

To enable service mesh:

1. If service mesh is not enabled at the global level for namespace, then run the following command to enable service mesh at the namespace level before deploying UDR-ATS.  
`kubectl label --overwrite namespace <namespace_name> istio-injection=enabled`

**Example:**

```
kubectl label --overwrite namespace ocudr istio-injection=enabled
```

2. Add the following annotation in the **lbDeployment** section under global section of the `ocats-udr-custom-values-24.2.7.yaml` file:

```
global:
  # ***** Sub-Section Start: Custom Extension Global Parameters
  *****

#*****

customExtension:
  allResources:
    labels: {}
    annotations: {}

  lbServices:
    labels: {}
    annotations: {}

  lbDeployments:
    labels: {}
    annotations:
      traffic.sidecar.istio.io/excludeInboundPorts: "8080"
      traffic.sidecar.istio.io/excludeOutboundPorts: "443,9000,22,9090"

  nonlbServices:
    labels: {}
    annotations: {}

  nonlbDeployments:
    labels: {}
    annotations: {}
```

3. Use the following code snippet to create an envoy filter for both UDR and ATS:

```

apiVersion: networking.istio.io/v1alpha3
kind: EnvoyFilter
metadata:
  name: <user defined name for envoy filter>
  namespace: <namespace where ATS is deployed>
spec:
  workloadSelector:
    labels:
      app: ocats-udr
  configPatches:
    - applyTo: NETWORK_FILTER
      match:
        listener:
          filterChain:
            filter:
              name: "envoy.http_connection_manager"
      patch:
        operation: MERGE
        value:
          typed_config:
            '@type': type.googleapis.com/
envoy.config.filter.network.http_connection_manager.v2.HttpConnectionManage
r
              server_header_transformation: PASS_THROUGH

---
apiVersion: networking.istio.io/v1alpha3
kind: EnvoyFilter
metadata:
  name: <user defined name for envoy filter>
  namespace: <namespace where ATS is deployed>
spec:
  workloadSelector:
    labels:
      app: ocats-udr
  configPatches:
    - applyTo: NETWORK_FILTER
      match:
        listener:
          filterChain:
            filter:
              name: "envoy.http_connection_manager"
      patch:
        operation: MERGE
        value:
          typed_config:
            '@type': type.googleapis.com/
envoy.config.filter.network.http_connection_manager.v2.HttpConnectionManage
r
              forward_client_cert_details: ALWAYS_FORWARD_ONLY

```

For more information about envoy filter and service mesh configuration, see the *Oracle Communications Cloud Native Core Unified Data Repository Installation and Upgrade Guide*.

4. After deploying service mesh, create Peer Authentication on the pods for inter pod communication. A sample template is as follows:

```
apiVersion: security.istio.io/v1beta1
kind: PeerAuthentication
metadata:
  name: <ATS Peer Authentication name>
  namespace: <ATS deployment namespace>
spec:
  selector:
    matchLabels:
      app: ocats-udr
  mtls:
    mode: PERMISSIVE
---
```

```
apiVersion: security.istio.io/v1beta1
kind: PeerAuthentication
metadata:
  name: <ATS Stubs Peer Authentication name>
  namespace: <ATS Stubs deployment namespace>
spec:
  selector:
    matchLabels:
      app: ocstub-py    mtls:
      mode: PERMISSIVE
```

5. ATS sidecar must have at least 2 CPUs and 2 Gi memory. ATS sidecar is configured as follows:

```
deployment:
  customExtension:
    annotations:
      sidecar.istio.io/proxyCPU: "2000m"
      sidecar.istio.io/proxyCPULimit: "2000m"
      sidecar.istio.io/proxyMemory: "2Gi"
      sidecar.istio.io/proxyMemoryLimit: "2Gi"
      proxy.istio.io/config: |
        concurrency: 4
```

### 3.8.7.9 Configuring Stubs

From ATS release 24.2.0:

- The common python stub chart and image must be used for two NRF-stubs, Notify-stub, TLS notify stub (TLS notify must be deployed separately), and SCP stub.
- Two different deployments of NRF (primary and secondary) using common python stub chart and image must be deployed for SLF-ATS and EIR-ATS.
- Two different deployments of NRF (primary and secondary), one deployment for notify stub (non-TLS scenarios), one deployment for tls-notify-stub (TLS scenarios) and one deployment for SCP stub must be deployed for UDR-ATS.

### 3.8.7.9.1 Configuring NRF Stub

UDR-ATS, SLF-ATS, and EIR-ATS requires two NRF stubs, one as primary NRF and other as secondary NRF. These NRF stubs is deployed using ocstub-py-custom-values-24.2.7.yaml.

To configure NRF stub:

- Provide the docker registry details with ocstub-py-custom-values-24.2.7.yaml file where images are pushed as follows:

```
image:
  repository: <docker registry>:<docker port>
```

- Set the env.NF to SLF, UDR, or 5G EIR depending upon the deployed NF:

```
env:
  ...
  NF: SLF
```

```
env:
  ...
  NF: UDR
```

```
env:
  ...
  NF: 5G_EIR
```

- Set the appendReleaseName parameter to false for backward compatibility and bypass\_additional\_port parameter to true to avoid creating HTTP1 port. Each deployment should have unique service name:

```
service:
  ...
  name: <user-defined nrf stub service name> #Example nrf-stub-service1
  for primary NRF stub and nrf-stub-service2 for secondary NRF stub
  appendReleaseName: false #this is to avoid adding release name at the
  beginning of the service name thereby supporting backward compatibility
  ...
  bypass_additional_port: true #to avoid creating HTTP1 port.
```

### 3.8.7.9.2 Configuring Notify Stub

UDR-ATS requires notify-stub to be deployed in two modes using ocstub-py-custom-values-24.2.7.yaml:

- HTTP mode: To receive non-TLS notifications from UDR
- HTTPS mode: To receive TLS notifications from UDR
- SCP mode: To validate SCP routing scenarios

To configure notify stub for Notify (TLS and non-TLS) and SCP stub modes:



- Update the docker registry where common python stub image is pushed as follows:

```
image:
  repository: <docker registry>:<docker port>
```

- Set the env.NF to UDR depending upon the whether the deployed NF is UDR:

```
env:
  ...
  NF: UDR
```

- Set the appendReleaseName parameter to false for backward compatibility and bypass\_additional\_port parameter to true to avoid creating HTTP1 port and expose\_tls\_service parameter to false to disable TLS mode of stub deployment. Common python stub deployed as HTTP and TLS server must have unique service name:

```
service:
  ...
  name: <user-defined notify stub service name> #Example notify-stub-
service for non-TLS stub
  appendReleaseName: false #this is to avoid adding release name at the
beginning of the service name thereby supporting backward compatibility
  ...
  bypass_additional_port: true #to avoid creating HTTP1 port.
  expose_tls_service: false
```

- Set the appendReleaseName parameter to false for backward compatibility and bypass\_additional\_port parameter to true to avoid creating HTTP1 port. Common python stub deployed as HTTP server must have unique service name:

```
service:
  ...
  name: <user-defined TLS notify stub service name> #Example tlstestify-
stub-service for TLS stub
  appendReleaseName: false #this is to avoid adding release name at the
beginning of the service name thereby supporting backward compatibility
  ...
  bypass_additional_port: true #to avoid creating HTTP1 port.
```

- Configure the stub with private key, certificates. and secret that is used by UDR Egress Gateway for TLS notification validation and set expose\_tls\_service to true:

```
env:
  ...
  cert_secret_name: <TLS secret of UDR egressgateway> #E.g., ocudr-gateway-
secret
  ca_cert: <CA certificate used for UDR egressgateway deployment> #E.g.,
caroot.cer
  client_cert: <Client certificate used for UDR egressgateway deployment>
#E.g., apigatewayrsa.cer
  private_key: <Private key used for UDR egressgateway deployment> #E.g.,
rsa_private_key_pkcs1.pem
  ...
  CLIENT_CERT_REQ: true
  APACHE_KEEP_ALIVE_TIMEOUT: 1000
```

```
...
service:
  ...
  expose_tls_service: true
```

- To deploy notify-stub as SCP set the appendReleaseName parameter to false for backward compatibility and bypass\_additional\_port parameter to true to avoid creating HTTP1 port and set expose\_tls\_service to false. Common python stub deployed as HTTP and TLS server must have unique service name:

```
service:
  ...
  name: <user-defined scp stub service name> #Example scp-stub-service for
  SCP stub
  appendReleaseName: false #this is to avoid adding release name at the
  beginning of the service name thereby supporting backward compatibility
  ...
  bypass_additional_port: true #to avoid creating HTTP1 port.
  expose_tls_service: false
```

### 3.8.7.9.3 Configuring Fourg Stub

UDR-ATS requires one fourg stub to test the migration scenarios. Configure the docker registry where diameter stub image is pushed as follows:

```
image:
  repository: <docker registry>:<docker port>/ocats-udr-fourg-stub-images
```

### 3.8.7.9.4 Configuring Diameter Stub

UDR-ATS requires two diameter stubs as two different diameter peers.

- diam-toola: peernode1 (seagull1a.seagull.com)
- diam-toolb: peernode2 (seagull1b.seagull.com)

#### Note

UDR-ATS uses diam-stub-24.2.7.yaml file for diameter stub configuration.

To configure diameter stubs:

- Update the docker registry where diameter stub image is pushed as follows:

```
image:
  repository: <docker registry>:<docker port>/ocats-udr-diam-stub-images
```

- Configure diam-toola as follows:

```
deployment:
  SourceIdentity: seagull1a.seagull.com
  SourceRealm: seagulla.com
```

- Configure diam-toolb as follows:

```
deployment:  
  SourceIdentity: seagull1b.seagull.com  
  SourceRealm: seagullb.com
```

## 3.8.8 Deploying ATS in Kubernetes Cluster

You can deploy ATS Pod in Kubernetes cluster using Helm commands.

Run the following command to deploy ATS.

```
helm install --name <release_name> --namespace <namespace_name> -f <values-yaml-  
file> ocats-udr
```

### Example:

```
helm install --name ocats-udr-24.2.7 --namespace ocudr -f ocats-udr-custom-  
values-24.2.7.yaml ocats-udr
```

### 3.8.8.1 Deploying ATS Pod and Stubs in Kubernetes Cluster

ATS resource allocation must be done by referring to the [Resource Requirements](#) section to support parallel test execution feature. For more information on Parallel Test Execution, see [Parallel Test Execution](#). If you must enable the Application Log Collection, see [UDR Application Log Collection](#).

The CPU and memory utilization depends on the number of behave command executed at given point of time. UDR-ATS runs six behave commands at a time and SLF-ATS runs seven behave commands at a time.

You can deploy stub pod in Kubernetes cluster using Helm commands.

Run the following command to deploy to deploy ATS and stubs:

```
helm install --name <release_name> --namespace <namespace_name> -f <values-  
yaml-file> ocats-udr
```

### Example:

```
helm install --name ocats-udr-24.2.7 --namespace ocudr -f ocats-udr-custom-  
values-24.2.7.yaml ocats-udr
```

### SLF-NewFeatures, EIR-NewFeatures, SLF-Regression, or EIR-Regression Pipeline

Run the following command to deploy NRF-STUB:

```
helm install --name <release_name> --namespace <namespace_name> -f <values-  
yaml-file> ocstub-py
```

### Example:

```
helm install --name stub1 --namespace ocudr -f ocstub-py-custom-  
values-24.2.7.yaml ocstub-py
```

```
helm install --name stub2 --namespace ocudr -f ocstub-py-custom-values-24.2.7.yaml ocstub-py
```

**Note**

To test DNS SRV feature in SLF-Regression and EIR-NewFeatures, NRF stub needs to be deployed two times to act as primary and secondary NRF.

**UDR-NewFeatures or UDR-Regression Pipelines using Helm**

Run the following commands to deploy each of the required stubs using Helm:

```
helm install --name <release_name> --namespace <namespace_name> -f <values-yaml-file> ocstub-py
```

```
helm install --name <release_name> --namespace <namespace_name> -f <fourg-stub-values-yaml-file> fourg-stub
```

```
helm install --name <release_name> --namespace <namespace_name> -f <diam-tool-values-yaml-file> diam-stub
```

**Example:**

```
helm install --name nrfstub --namespace ocudr -f ocstub-py-custom-values-24.2.7.yaml ocstub-py
```

```
helm install --name notify --namespace ocudr -f ocstub-py-custom-values-24.2.7.yaml ocstub-py
```

```
helm install --name tlsnotify --namespace ocudr -f ocstub-py-custom-values-24.2.7.yaml ocstub-py
```

```
helm install --name scp --namespace ocudr -f ocstub-py-custom-values-24.2.7.yaml ocstub-py
```

```
helm install --name fourgstub --namespace ocudr -f fourg-stub-custom-values-24.2.7.yaml fourg-stub
```

```
helm install --name diamtoola --namespace ocudr -f diam-tool-custom-values-24.2.7.yaml diam-stub
```

```
helm install --name diamtoolb --namespace ocudr -f diam-tool-custom-values-24.2.7.yaml diam-stub
```

## 3.8.9 Verifying ATS Deployment

To verify ATS deployment, run the following command:

```
helm status <release_name>
```

**Figure 3-22 Verifying ATS Deployment**

```
[cloud-user@cne-23-3-bastion-1 ~]$ helm status ats-rc3 -n ats-rc3
NAME: ats-rc3
LAST DEPLOYED: Tue Jun 11 14:44:33 2024
NAMESPACE: ats-rc3
STATUS: deployed
REVISION: 1
TEST SUITE: None
NOTES:
# Copyright 2018 (C), Oracle and/or its affiliates. All rights reserved.

Thank you for installing ocats-udr.

Your release is named ats-rc3 , Release Revision: 1.
To learn more about the release, try:

    $ helm status ats-rc3
    $ helm get ats-rc3
```

To view UDR, four UDRs, Provisioning Gateway, two NRF stubs, one bulk import and ATS deployed in the SLF namespace, run `kubectl get pods -n <ns>` command. The output is as follows:

Figure 3-23 Sample SLF Namespace

```
[cloud-user@cne-23-4-rc2-bastion-1 5G-UDR]$ kubectl get pods -n udr-aiddya
```

| NAME                                               | READY | STATUS    | RESTARTS | AGE |
|----------------------------------------------------|-------|-----------|----------|-----|
| bulk-import-nudr-bulk-import-0                     | 2/2   | Running   | 0        | 24h |
| oso-prom-aiddya-alm-0                              | 2/2   | Running   | 0        | 25h |
| oso-prom-aiddya-alm-1                              | 2/2   | Running   | 0        | 25h |
| oso-prom-aiddya-svr-857b89fc46-4bsq8               | 2/2   | Running   | 0        | 25h |
| provgw-auditor-service-0                           | 2/2   | Running   | 0        | 20h |
| provgw-prov-egressgateway-789ff5bc44-2ln5p         | 2/2   | Running   | 0        | 20h |
| provgw-prov-ingressgateway-6b77c89768-lvtmk        | 2/2   | Running   | 0        | 20h |
| provgw-provgw-config-65f6674b78-xfdq2              | 2/2   | Running   | 0        | 25h |
| provgw-provgw-config-server-8596bfd99b-rhtzs       | 2/2   | Running   | 0        | 25h |
| provgw-provgw-service-55cf5d8989-kmzs              | 2/2   | Running   | 0        | 20h |
| provgw-test                                        | 0/1   | Completed | 0        | 24h |
| slfats-ocats-udr-5f7867d8fb-q4b9n                  | 2/2   | Running   | 0        | 24h |
| slfexport-nudr-export-tool-0                       | 2/2   | Running   | 0        | 24h |
| stub1-ocstub-py-7b5f595b45-ltrzt                   | 2/2   | Running   | 0        | 25h |
| stub2-ocstub-py-5c7b78dc8f-9fddj                   | 2/2   | Running   | 0        | 25h |
| udr1-alternate-route-6945dc565-dwfvt               | 2/2   | Running   | 0        | 21h |
| udr1-appinfo-866568579b-n4s2m                      | 2/2   | Running   | 0        | 21h |
| udr1-egressgateway-c975fc64b-ppkbt                 | 2/2   | Running   | 0        | 19h |
| udr1-ingressgateway-prov-6b49c5658d-bff5m          | 2/2   | Running   | 0        | 19h |
| udr1-ingressgateway-prov-6b49c5658d-zsrfn          | 2/2   | Running   | 0        | 19h |
| udr1-ingressgateway-sig-84ccd7d44f-18jzg           | 2/2   | Running   | 0        | 21h |
| udr1-ingressgateway-sig-84ccd7d44f-xmq2c           | 2/2   | Running   | 0        | 21h |
| udr1-nudr-config-c46df86c8-x5hsq                   | 2/2   | Running   | 0        | 21h |
| udr1-nudr-config-server-7848ccb59f-zlrgv           | 2/2   | Running   | 0        | 21h |
| udr1-nudr-dr-provservice-7c8bdd7dcc-2b2jq          | 2/2   | Running   | 0        | 19h |
| udr1-nudr-dr-provservice-7c8bdd7dcc-cw9km          | 2/2   | Running   | 0        | 19h |
| udr1-nudr-dr-service-74956dbb6b-54vhl              | 2/2   | Running   | 0        | 19h |
| udr1-nudr-dr-service-74956dbb6b-qmubv              | 2/2   | Running   | 0        | 19h |
| udr1-nudr-nrf-client-nfmanagement-68d4b64c86-v6ht9 | 2/2   | Running   | 0        | 21h |
| udr1-performance-f66f95f9c-1f2wv                   | 2/2   | Running   | 0        | 21h |
| udr1-test                                          | 0/1   | Completed | 0        | 24h |
| udr2-alternate-route-6447648587-vz8kq              | 2/2   | Running   | 0        | 21h |
| udr2-appinfo-6b8d9b667d-85tbq                      | 2/2   | Running   | 0        | 21h |
| udr2-egressgateway-75fb795fc8-4sm4s                | 2/2   | Running   | 0        | 19h |
| udr2-ingressgateway-prov-656d9f9b98-q4s7h          | 2/2   | Running   | 0        | 21h |
| udr2-ingressgateway-sig-5f45dcd795-mqvs4           | 2/2   | Running   | 0        | 21h |
| udr2-nudr-config-6469b86f6f-wnztt                  | 2/2   | Running   | 0        | 21h |
| udr2-nudr-config-server-7b8ccc64f5-brrhf           | 2/2   | Running   | 0        | 21h |
| udr2-nudr-dr-provservice-64cc7c77f9-tfkt5          | 2/2   | Running   | 0        | 21h |
| udr2-nudr-dr-service-5d58d9cb68-p4x6b              | 2/2   | Running   | 0        | 19h |
| udr2-performance-75d784d8c4-5mlz4                  | 2/2   | Running   | 0        | 21h |
| udr2-test                                          | 0/1   | Completed | 0        | 24h |
| udr3-alternate-route-d9b86b87b-m7bx7               | 2/2   | Running   | 0        | 21h |
| udr3-appinfo-6c5b4dd775-w5pd7                      | 2/2   | Running   | 0        | 21h |
| udr3-egressgateway-64948d4947-sff4m                | 2/2   | Running   | 0        | 19h |
| udr3-ingressgateway-prov-fd85bc94-2jjn2            | 2/2   | Running   | 0        | 19h |
| udr3-ingressgateway-sig-7b889b6847-8kh79           | 2/2   | Running   | 0        | 21h |
| udr3-nudr-config-546686bb44-xzp8d                  | 2/2   | Running   | 0        | 21h |
| udr3-nudr-config-server-847d5859f-q4j54            | 2/2   | Running   | 0        | 21h |
| udr3-nudr-dr-provservice-74b9c48fc8-gghdf          | 2/2   | Running   | 0        | 19h |
| udr3-nudr-dr-service-79df4485cb-gkbj7              | 2/2   | Running   | 0        | 19h |
| udr3-performance-594d75fbd6-gr5gl                  | 2/2   | Running   | 0        | 21h |
| udr3-test                                          | 0/1   | Completed | 0        | 24h |
| udr4-alternate-route-dcbcdff97-b2xtc               | 2/2   | Running   | 0        | 21h |
| udr4-appinfo-57b8c8f94d-7fqbc                      | 2/2   | Running   | 0        | 21h |
| udr4-egressgateway-76b97b44d4-skw9n                | 2/2   | Running   | 0        | 19h |
| udr4-ingressgateway-prov-6c7b4f7964-rv4b5          | 2/2   | Running   | 0        | 21h |
| udr4-ingressgateway-sig-79c9ff47b8-vhc28           | 2/2   | Running   | 0        | 21h |
| udr4-nudr-config-7cd7f585d-nr18v                   | 2/2   | Running   | 0        | 21h |
| udr4-nudr-config-server-58ddb5f5f9-c5rgm           | 2/2   | Running   | 0        | 21h |
| udr4-nudr-dr-provservice-56bbd8d65c-7tm8q          | 2/2   | Running   | 0        | 21h |
| udr4-nudr-dr-service-68dd78c99c-m6gvv              | 2/2   | Running   | 0        | 19h |
| udr4-performance-75cd7bc46-ln59w                   | 2/2   | Running   | 0        | 21h |
| udr4-test                                          | 0/1   | Completed | 0        | 24h |

Following is the sample output of the command, 'kubectl get pods -n <ns>'. It shows OCUDR namespace with one UDR, one Provisioning Gateway, two diam-tool stubs, one http-server stub, one SCP stub, one bulk import, two NRF stubs, one fourg-stub and ATS after installing UDR-ATS for UDR-Pipelines:

**Figure 3-24 Sample UDR Namespace**

```
[cloud-user@cne-23-3-bastion-1 ~]$ kubectl get pods -n ats-rc3
```

| NAME                                                    | READY | STATUS    | RESTARTS      | AGE   |
|---------------------------------------------------------|-------|-----------|---------------|-------|
| ats-rc3-ocats-udr-678b675dbd-7nx25                      | 1/1   | Running   | 0             | 22h   |
| bulk-import-nudr-bulk-import-0                          | 2/2   | Running   | 0             | 22h   |
| diamtoola-rc3-diam-stub-6b969f9c7-76pmx                 | 1/1   | Running   | 0             | 22h   |
| diamtoolb-rc3-diam-stub-594fff9456-lk2x6                | 1/1   | Running   | 0             | 22h   |
| fourgstub-rc3-fourg-stub-6c978df77f-hj7tk               | 1/1   | Running   | 0             | 22h   |
| migration-tool-nudr-migration-tool-0                    | 1/1   | Running   | 0             | 18h   |
| notifystub-rc3-ocstub-py-fdc99d96f-wpw8t                | 1/1   | Running   | 0             | 22h   |
| nrfstub1-rc3-ocstub-py-69cb65d96f-rvfpq                 | 1/1   | Running   | 0             | 22h   |
| nrfstub2-rc3-ocstub-py-667785dfdf-qpb1p                 | 1/1   | Running   | 0             | 22h   |
| ocudr-rc3-alternate-route-8f8b487db-b2z5p               | 1/1   | Running   | 0             | 22h   |
| ocudr-rc3-appinfo-648848f659-8scvq                      | 1/1   | Running   | 0             | 22h   |
| ocudr-rc3-appinfo-648848f659-xm6r6                      | 1/1   | Running   | 0             | 22h   |
| ocudr-rc3-egressgateway-75875787d6-v5dpk                | 1/1   | Running   | 0             | 5h38m |
| ocudr-rc3-ingressgateway-prov-75b666f484-vn9d7          | 1/1   | Running   | 0             | 5h38m |
| ocudr-rc3-ingressgateway-sig-74745cc7bd-22fvn           | 1/1   | Running   | 0             | 5h38m |
| ocudr-rc3-nudr-config-f97d944cb-nn7rf                   | 1/1   | Running   | 0             | 5h38m |
| ocudr-rc3-nudr-config-server-5f6b964c44-9rl82           | 1/1   | Running   | 0             | 5h38m |
| ocudr-rc3-nudr-config-server-5f6b964c44-f52rh           | 1/1   | Running   | 0             | 5h38m |
| ocudr-rc3-nudr-diam-gateway-0                           | 1/1   | Running   | 0             | 22h   |
| ocudr-rc3-nudr-diameterproxy-5bd5879df-mlrt6            | 1/1   | Running   | 0             | 22h   |
| ocudr-rc3-nudr-dr-provservice-5cf684bcb6-w7pkp          | 1/1   | Running   | 1 (5h32m ago) | 5h33m |
| ocudr-rc3-nudr-drservice-5968c6cb59-bmx2s               | 1/1   | Running   | 0             | 5h38m |
| ocudr-rc3-nudr-notify-service-5765f74d85-hzxhv          | 1/1   | Running   | 0             | 12h   |
| ocudr-rc3-nudr-nrf-client-nfmanagement-589cf4b8c8-5jlmc | 1/1   | Running   | 0             | 12h   |
| ocudr-rc3-nudr-ondemand-migration-6b6f857b9c-ljr4b      | 1/1   | Running   | 0             | 12h   |
| ocudr-rc3-performance-664bfd6d6-rtldf                   | 1/1   | Running   | 0             | 5h56m |
| ocudr-rc3-test                                          | 0/1   | Completed | 0             | 22h   |
| provgw-prov-egressgateway-56445b8c9c-zpgz2              | 1/1   | Running   | 0             | 5h56m |
| provgw-prov-ingressgateway-9f8d7c45d-67nz4              | 1/1   | Running   | 0             | 5h56m |
| provgw-provgw-config-54d647995d-6k8cm                   | 1/1   | Running   | 0             | 5h56m |
| provgw-provgw-config-server-775965d599-dt75p            | 1/1   | Running   | 0             | 5h56m |
| provgw-provgw-config-server-775965d599-zvnwg            | 1/1   | Running   | 0             | 5h56m |
| provgw-provgw-service-c4ff85d8-f7q6g                    | 1/1   | Running   | 0             | 22h   |
| scpstub-rc3-ocstub-py-5bf4bbd499-zemr7                  | 1/1   | Running   | 0             | 22h   |
| tlsnotifystub-rc3-ocstub-py-65dffffc56-2flh5            | 1/1   | Running   | 0             | 22h   |
| udrexport-nudr-export-tool-0                            | 1/1   | Running   | 0             | 22h   |

Following is the sample output of the command, 'kubectl get pods -n <ns>'. It shows OCUDR namespace with one UDR, two nrf stubs, one bulk import and ATS after installation for EIR pipeline:

**Figure 3-25 Sample EIR Namespace**

```
[cloud-user@cne-cicd-223-bastion-1 ~]$ kubectl get pods -n eir-5801444
```

| NAME                                                        | READY | STATUS  | RESTARTS | AGE |
|-------------------------------------------------------------|-------|---------|----------|-----|
| bulk-import-nudr-bulk-import-0                              | 2/2   | Running | 0        | 19m |
| eirats-ocats-udr-794b8bd9f8-m7pjb                           | 1/1   | Running | 0        | 26m |
| export-tool-nudr-export-tool-0                              | 1/1   | Running | 0        | 19m |
| oceir-5801444-alternate-route-5c5c44c9db-dbgrr              | 1/1   | Running | 0        | 21m |
| oceir-5801444-appinfo-7c9747d-zkj94                         | 1/1   | Running | 0        | 21m |
| oceir-5801444-egressgateway-787f8fc947-nxqgm                | 1/1   | Running | 0        | 21m |
| oceir-5801444-ingressgateway-prov-fcf49477d-kf4k8           | 2/2   | Running | 0        | 21m |
| oceir-5801444-ingressgateway-sig-7b9bb5c687-9gfjr           | 2/2   | Running | 0        | 21m |
| oceir-5801444-nudr-config-f5b6bb68f-qkqx6                   | 1/1   | Running | 0        | 21m |
| oceir-5801444-nudr-config-server-7b764d6d9c-rdn8g           | 1/1   | Running | 0        | 21m |
| oceir-5801444-nudr-dr-provservice-6c4cdc6cc6-scxjt          | 1/1   | Running | 0        | 21m |
| oceir-5801444-nudr-drservice-85bf7c5b9d-kwpjf               | 1/1   | Running | 0        | 21m |
| oceir-5801444-nudr-nrf-client-nfmanagement-6fdd454844-t7ndl | 1/1   | Running | 0        | 21m |
| oceir-5801444-performance-bbb875b9b-b69cs                   | 1/1   | Running | 0        | 21m |
| oceir-5801444-performance-bbb875b9b-pcst5                   | 1/1   | Running | 0        | 21m |
| stub1-nrf-ocstub-python-fff7b85fb-sh9rn                     | 1/1   | Running | 0        | 26m |
| stub2-nrf-ocstub-python-7d756758f-f2hhd                     | 1/1   | Running | 0        | 26m |

If you have installed ATS with sidecar, ensure ATS shows two containers in the READY state as "2/2". A sample output of the command, 'kubectl get pods -n <ns>' for SLF-Pipelines is as follows:

Figure 3-26 ATS Deployed with Sidecar

```
[cloud-user@cne-23-4-rc2-bastion-1 5G-UDR]$ kubectl get pods -n udr-aiddya
```

| NAME                                               | READY | STATUS    | RESTARTS | AGE |
|----------------------------------------------------|-------|-----------|----------|-----|
| bulk-import-nudr-bulk-import-0                     | 2/2   | Running   | 0        | 24h |
| oso-prom-aiddya-alm-0                              | 2/2   | Running   | 0        | 25h |
| oso-prom-aiddya-alm-1                              | 2/2   | Running   | 0        | 25h |
| oso-prom-aiddya-svr-857b89fc46-4bsq8               | 2/2   | Running   | 0        | 25h |
| provgw-auditor-service-0                           | 2/2   | Running   | 0        | 20h |
| provgw-prov-egressgateway-789ff5bc44-2ln5p         | 2/2   | Running   | 0        | 20h |
| provgw-prov-ingressgateway-6b77c89768-lvtmk        | 2/2   | Running   | 0        | 20h |
| provgw-provgw-config-65f6674b78-xfdq2              | 2/2   | Running   | 0        | 25h |
| provgw-provgw-config-server-8596bfd99b-rhtzs       | 2/2   | Running   | 0        | 25h |
| provgw-provgw-service-55cf5d8989-kmzs              | 2/2   | Running   | 0        | 20h |
| provgw-test                                        | 0/1   | Completed | 0        | 24h |
| slfats-ocats-udr-5f7867d8fb-q4b9n                  | 2/2   | Running   | 0        | 24h |
| slfexport-nudr-export-tool-0                       | 2/2   | Running   | 0        | 24h |
| stub1-ocstub-py-7b5f595b45-1trzt                   | 2/2   | Running   | 0        | 25h |
| stub2-ocstub-py-5c7b78dc8f-9fddj                   | 2/2   | Running   | 0        | 25h |
| udr1-alternate-route-6945dc565-dwfut               | 2/2   | Running   | 0        | 21h |
| udr1-appinfo-866568579b-n4s2m                      | 2/2   | Running   | 0        | 21h |
| udr1-egressgateway-c975fc64b-ppkbt                 | 2/2   | Running   | 0        | 19h |
| udr1-ingressgateway-prov-6b49c5658d-bff5m          | 2/2   | Running   | 0        | 19h |
| udr1-ingressgateway-prov-6b49c5658d-zsrfn          | 2/2   | Running   | 0        | 19h |
| udr1-ingressgateway-sig-84ccd7d44f-18jzg           | 2/2   | Running   | 0        | 21h |
| udr1-ingressgateway-sig-84ccd7d44f-xmq2c           | 2/2   | Running   | 0        | 21h |
| udr1-nudr-config-c46df86c8-x5hsq                   | 2/2   | Running   | 0        | 21h |
| udr1-nudr-config-server-7848ccb59f-zlrgv           | 2/2   | Running   | 0        | 21h |
| udr1-nudr-dr-provservice-7c8bdd7dcc-2b2jq          | 2/2   | Running   | 0        | 19h |
| udr1-nudr-dr-provservice-7c8bdd7dcc-cw9km          | 2/2   | Running   | 0        | 19h |
| udr1-nudr-dr-service-74956dbb6b-54vhl              | 2/2   | Running   | 0        | 19h |
| udr1-nudr-dr-service-74956dbb6b-qmubv              | 2/2   | Running   | 0        | 19h |
| udr1-nudr-nrf-client-nfmanagement-68d4b64c86-v6ht9 | 2/2   | Running   | 0        | 21h |
| udr1-performance-f66f95f9c-1f2wv                   | 2/2   | Running   | 0        | 21h |
| udr1-test                                          | 0/1   | Completed | 0        | 24h |
| udr2-alternate-route-6447648587-vz8kq              | 2/2   | Running   | 0        | 21h |
| udr2-appinfo-6b8d9b667d-85tbq                      | 2/2   | Running   | 0        | 21h |
| udr2-egressgateway-75fb795fc8-4sm4s                | 2/2   | Running   | 0        | 19h |
| udr2-ingressgateway-prov-656d9f9b98-q4s7h          | 2/2   | Running   | 0        | 21h |
| udr2-ingressgateway-sig-5f45dcd795-mqvs4           | 2/2   | Running   | 0        | 21h |
| udr2-nudr-config-6469b86f6f-wnztt                  | 2/2   | Running   | 0        | 21h |
| udr2-nudr-config-server-7b8ccc64f5-brrhf           | 2/2   | Running   | 0        | 21h |
| udr2-nudr-dr-provservice-64cc7c77f9-tfkt5          | 2/2   | Running   | 0        | 21h |
| udr2-nudr-dr-service-5d58d9cb68-p4x6b              | 2/2   | Running   | 0        | 19h |
| udr2-performance-75d784d8c4-5mlz4                  | 2/2   | Running   | 0        | 21h |
| udr2-test                                          | 0/1   | Completed | 0        | 24h |
| udr3-alternate-route-d9b86b87b-m7bx7               | 2/2   | Running   | 0        | 21h |
| udr3-appinfo-6c5b4dd775-w5pd7                      | 2/2   | Running   | 0        | 21h |
| udr3-egressgateway-64948d4947-sff4m                | 2/2   | Running   | 0        | 19h |
| udr3-ingressgateway-prov-fd85bc94-2jjn2            | 2/2   | Running   | 0        | 19h |
| udr3-ingressgateway-sig-7b889b6847-8kh79           | 2/2   | Running   | 0        | 21h |
| udr3-nudr-config-546686bb44-xzp8d                  | 2/2   | Running   | 0        | 21h |
| udr3-nudr-config-server-847d5859f-q4j54            | 2/2   | Running   | 0        | 21h |
| udr3-nudr-dr-provservice-74b9c48fc8-gghdf          | 2/2   | Running   | 0        | 19h |
| udr3-nudr-dr-service-79df4485cb-gkbj7              | 2/2   | Running   | 0        | 19h |
| udr3-performance-594d75fbd6-gr5gl                  | 2/2   | Running   | 0        | 21h |
| udr3-test                                          | 0/1   | Completed | 0        | 24h |
| udr4-alternate-route-dcbcdf97-b2xtc                | 2/2   | Running   | 0        | 21h |
| udr4-appinfo-57b8c8f94d-7fqbc                      | 2/2   | Running   | 0        | 21h |
| udr4-egressgateway-76b97b44d4-skwn9                | 2/2   | Running   | 0        | 19h |
| udr4-ingressgateway-prov-6c7b4f7964-rv4b5          | 2/2   | Running   | 0        | 21h |
| udr4-ingressgateway-sig-79c9ff47b8-vhc28           | 2/2   | Running   | 0        | 21h |
| udr4-nudr-config-7cd7f585d-nr18v                   | 2/2   | Running   | 0        | 21h |
| udr4-nudr-config-server-58ddb5ff9-c5rgm            | 2/2   | Running   | 0        | 21h |
| udr4-nudr-dr-provservice-56bbd8d65c-7tm8q          | 2/2   | Running   | 0        | 21h |
| udr4-nudr-dr-service-68dd78c99c-m6gvv              | 2/2   | Running   | 0        | 19h |
| udr4-performance-75cd7bc46-1n59w                   | 2/2   | Running   | 0        | 21h |
| udr4-test                                          | 0/1   | Completed | 0        | 24h |



## 3.8.10 Post Installation Steps

### If Provisioning Gateway is upgraded using helm upgrade command

Following are the post installation steps:

1. Perform the post installation steps as described in Cloud Native Core Provisioning Gateway Guide to change segDetails to UDR Provisioning Ingress Gateway fqdn and port. For more information, see *Cloud Native Core Provisioning Gateway Guide*.

2. Run the following command:

```
kubectl exec -it -n <ns> <ATS pod> bash
```

3. Run the following command:

```
curl -X PUT http://<provgw helm release>-provgw-config.<ns>:5001/provgw-config/v1/udr.provgwservice.cfg/PROVGW-SERVICE -d '{"tracingEnabled": false, "soapService_udrIp": "ocudr-ingressgateway-prov.ocudr", "soapService_udrSignallingIp": "ocudr-ingressgateway-sig.ocudr", "retryErrorCodes": [500, 503], "retryCount": 3, "retryInterval": 2}'
```

4. Run the exit command.

### If PV (Persistent Volume) is enabled for UDR ATS

Following are the post installation steps:

1. Run the following command to extract the ocslf\_tests (for SLF Pipelines), ocudr\_tests (for UDR Pipelines), or oceir\_tests (for EIR Pipeline) and jobs from ocats-udr-data-24.2.7.tgz..  
tar -xvf ocats-udr-data-24.2.7.tgz
2. Run the following command to create certs and oauth\_keys in ocslf\_tests folder (for SLF pipeline runs), oceir\_tests (for EIR pipeline runs), or ocudr\_tests (for UDR pipeline runs):

```
mkdir -p ocslf_tests/certs ocslf_tests/oauth_keys
```

```
mkdir -p oceir_tests/certs oceir_tests/oauth_keys
```

```
mkdir -p ocudr_tests/certs ocudr_tests/oauth_keys
```

3. Run the following commands to copy the ocslf\_tests and jobs folder to the ATS pod only if it is intended to run SLF Pipelines.

```
kubectl cp ocslf_tests <namespace>/<pod-name>:/var/lib/jenkins
kubectl cp jobs <namespace>/<pod-name>:/var/lib/jenkins/.jenkins
```

4. Run the following commands to copy the ocudr\_tests and jobs folder to the ATS pod only if it is intended to run UDR Pipelines.

```
kubectl cp ocudr_tests <namespace>/<pod-name>:/var/lib/jenkins
kubectl cp jobs <namespace>/<pod-name>:/var/lib/jenkins/.jenkins
```

5. Run the following commands to copy the oceir\_tests and jobs folder to the ATS pod only if it is intended to run EIR Pipelines.

```
kubectl cp oceir_tests <namespace>/<pod-name>:/var/lib/jenkins
kubectl cp jobs <namespace>/<pod-name>:/var/lib/jenkins/.jenkins
```

6. Run the following command to restart the pod:  
kubectl delete pod <pod-name> -n <namespace>

7. For SLF-NewFeatures and SLF-Regression pipelines, copy the root certificate authority (CA), signed server certificate with root CA private key, and private keys used to create secret for TLS support on Provisioning Gateway to ocsf\_tests/certs folder in the path as follows:

**Note**

Provisioning Gateway must use all three files as part of TLS support.

- a. kubectl cp <root CA> <namespace>/<pod-name>:/var/lib/jenkins/ocsf\_tests/certs  
**Example:** kubectl cp caroot.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocsf\_tests/certs
- b. kubectl cp <server certificate> <namespace>/<pod-name>:/var/lib/jenkins/ocsf\_tests/certs  
**Example:** kubectl cp apigatewayrsa.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocsf\_tests/certs
- c. kubectl cp <private key> <namespace>/<pod-name>:/var/lib/jenkins/ocsf\_tests/certs  
**Example:** kubectl cp rsa\_private\_key\_pkcs1.pem ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocsf\_tests/certs

**Note**

Provisioning Gateway should use the above three files as part of TLS support.

8. For UDR-NewFeatures and UDR-Regression pipelines, copy the root certificate authority (CA), signed server certificate with root CA private key, and private key that are used to create secret for TLS support on Provisioning Gateway to ocudr\_tests or ocudr\_certs folder in the path as follows:

**Note**

For TLS validation, use the same set of copied certificates for Provisioning Gateway Ingress Gateway, UDR Ingress Gateway, and UDR Egress Gateway.

- a. `kubectl cp <root CA> <namespace>/<pod-name>:/var/lib/jenkins/ocudr_tests/certs`  
**Example:** `kubectl cp caroot.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocudr_tests/certs`
  - b. `kubectl cp <server certificate> <namespace>/<pod-name>:/var/lib/jenkins/ocudr_tests/certs`  
**Example:** `kubectl cp apigatewayrsa.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocudr_tests/certs`
  - c. `kubectl cp <private key> <namespace>/<pod-name>:/var/lib/jenkins/ocudr_tests/certs`  
**Example:** `kubectl cp rsa_private_key_pkcs1.pem ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocudr_tests/certs`
9. For EIR-NewFeatures and EIR-Regression pipelines, copy the root certificate authority (CA), signed server certificate with root CA private key, and private key that are used to create secret for TLS support on UDR ingressgateway-prov and ingressgateway-sig to oceir\_tests/certs folder in the path as follows:
- a. `kubectl cp <root CA> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`  
**Example:** `kubectl cp caroot_sig.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`
  - b. `kubectl cp <server certificate> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`  
**Example:** `kubectl cp apigatewayrsa_sig.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`
  - c. `kubectl cp <private key> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`  
**Example:** `kubectl cp rsa_private_key_pkcs1_sig.pem ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`
  - d. `kubectl cp <root CA> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`  
**Example:** `kubectl cp caroot_prov.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`
  - e. `kubectl cp <server certificate> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`  
**Example:** `kubectl cp apigatewayrsa_prov.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`
  - f. `kubectl cp <private key> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`  
**Example:** `kubectl cp rsa_private_key_pkcs1_prov.pem ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`
10. To run Oauth2 validation scenarios on SLF-Regression, copy each private keys in pem format to oauth\_keys folder in /var/lib/jenkins/ocslf\_tests path.

```
kubectl cp <private key pem file> <namespace>/<pod-name>:/var/lib/jenkins/ocslf_tests/oauth_keys
```

Example:

```
kubectl cp ec_private_key1.pem ocudr/ats-ocats-
udr-696df7c84d-2qc7h:/var/lib/jenkins/ocslf_tests/oauth_keys
```

11. To run OAuth2 validation scenarios on UDR-Regression, copy each private keys in pem format to oauth\_keys folder in /var/lib/jenkins/ocudr\_tests path.

```
kubectl cp <private key pem file> <namespace>/<pod-name>:/var/lib/jenkins/
ocudr_tests/oauth_keys
```

Example:

```
kubectl cp ec_private_key1.pem ocudr/ats-ocats-
udr-696df7c84d-2qc7h:/var/lib/jenkins/ocudr_tests/oauth_keys
```

12. To run OAuth2 validation scenarios on EIR-Regression, copy each private keys in pem format to oauth\_keys folder in /var/lib/jenkins/oceir\_tests path.

```
kubectl cp <private key pem file> <namespace>/<pod-name>:/var/lib/jenkins/
oceir_tests/oauth_keys
```

Example:

```
kubectl cp ec_private_key1.pem ocudr/ats-ocats-
udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/oauth_keys
```

#### If PV is disabled:

Following are the post installation steps:

1. For SLF-NewFeatures and SLF-Regression pipelines, copy the root certificate authority (CA), signed server certificate with root CA private key, and private key used to create secret for TLS support on Provisioning Gateway to ocslf\_tests/certs folder in the path as follows:

#### Note

Provisioning Gateway must use all three files as part of TLS support.

- a. `kubectl cp <root CA> <namespace>/<pod-name>:/var/lib/jenkins/ocslf_tests/certs`  
**Example:** `kubectl cp caroot.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocslf_tests/certs`
- b. `kubectl cp <server certificate> <namespace>/<pod-name>:/var/lib/jenkins/ocslf_tests/certs`  
**Example:** `kubectl cp apigatewayrsa.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocslf_tests/certs`
- c. `kubectl cp <private key> <namespace>/<pod-name>:/var/lib/jenkins/ocslf_tests/certs`

**Example:** `kubectl cp rsa_private_key_pkcs1.pem ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocslf_tests/certs`

2. For UDR-NewFeatures and UDR-Regression pipelines, copy the root certificate authority (CA), signed server certificate with root CA private key, and private keys used to create secret for TLS support on Provisioning Gateway to `ocslf_tests/certs` folder in the path as follows:

**Note**

For TLS validation, use the same set of copied certificates for Provisioning Gateway Ingress Gateway, UDR Ingress Gateway, and UDR Egress Gateway.

- a. `kubectl cp <root CA> <namespace>/<pod-name>:/var/lib/jenkins/ocudr_tests/certs`  
**Example:** `kubectl cp caroot.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocudr_tests/certs`
- b. `kubectl cp <server certificate> <namespace>/<pod-name>:/var/lib/jenkins/ocudr_tests/certs`  
**Example:** `kubectl cp apigatewayrsa.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocudr_tests/certs`
- c. `kubectl cp <private key> <namespace>/<pod-name>:/var/lib/jenkins/ocudr_tests/certs`  
**Example:** `kubectl cp rsa_private_key_pkcs1.pem ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/ocudr_tests/certs`

**Note**

The Ingress Gateway of UDR should use the above three files as part of TLS support.

3. For EIR-NewFeatures and EIR-Regression pipelines, copy the root certificate authority (CA), signed server certificate with root CA private key, and private keys used to create secret for TLS support on UDR ingressgateway-prov and ingressgateway-sig to `oceir_tests/certs` folder in the path as follows:
  - a. `kubectl cp <root CA> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`  
**Example:** `kubectl cp caroot_sig.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`
  - b. `kubectl cp <server certificate> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`  
**Example:** `kubectl cp apigatewayrsa_sig.cer ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`
  - c. `kubectl cp <private key> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`  
**Example:** `kubectl cp rsa_private_key_pkcs1_sig.pem ocudr/ats-ocats-udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`
  - d. `kubectl cp <root CA> <namespace>/<pod-name>:/var/lib/jenkins/oceir_tests/certs`

**Example:** `kubectl cp caroot_prov.cer ocudr/ats-ocats-  
udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`

- e. `kubectl cp <server certificate> <namespace>/<pod-name>:/var/lib/jenkins/  
oceir_tests/certs`

**Example:** `kubectl cp apigatewayrsa_prov.cer ocudr/ats-ocats-  
udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`

- f. `kubectl cp <private key> <namespace>/<pod-name>:/var/lib/jenkins/  
oceir_tests/certs`

**Example:** `kubectl cp rsa_private_key_pkcs1_prov.pem ocudr/ats-ocats-  
udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/certs`

4. To run OAuth2 validation scenarios on SLF-Regression, copy each private keys in pem format to `oauth_keys` folder in `/var/lib/jenkins/ocslf_tests` path.

```
kubectl cp <private key pem file>
      <namespace>/<pod-name>:/var/lib/jenkins/ocslf_tests/oauth_keys
```

**Example:**

```
kubectl cp ec_private_key1.pem ocudr/ats-ocats-  
udr-696df7c84d-2qc7h:/var/lib/jenkins/ocslf_tests/oauth_keys
```

5. To run OAuth2 validation scenarios on UDR-Regression, copy each private keys in pem format to `oauth_keys` folder in `/var/lib/jenkins/ocudr_tests` path.

```
kubectl cp <private key pem file>
      <namespace>/<pod-name>:/var/lib/jenkins/ocudr_tests/oauth_keys
```

**Example:**

```
kubectl cp ec_private_key1.pem ocudr/ats-ocats-  
udr-696df7c84d-2qc7h:/var/lib/jenkins/ocudr_tests/oauth_keys
```

6. To run OAuth2 validation scenarios on EIR-Regression, copy each private keys in pem format to `oauth_keys` folder in `/var/lib/jenkins/oceir_tests` path.

```
kubectl cp <private key pem file> <namespace>/<pod-name>:/var/lib/jenkins/  
oceir_tests/oauth_keys
```

**Example:**

```
Example: kubectl cp ec_private_key1.pem ocudr/ats-ocats-  
udr-696df7c84d-2qc7h:/var/lib/jenkins/oceir_tests/oauth_keys
```

# 4

## Running NF Test Cases Using ATS

This section describes how to run NF test cases using ATS. It includes:

- [Running BSF Test Cases using ATS](#)
- [Running NEF Test Cases using ATS](#)
- [Running NRF Test Cases using ATS](#)
- [Running NSSF Test Cases using ATS](#)
- [Running Policy Test Cases using ATS](#)
- [Running SCP Test Cases using ATS](#)
- [Running SEPP Test Cases using ATS](#)
- [Running UDR Test Cases using ATS](#)

### 4.1 Running BSF Test Cases using ATS

This section describes how to run BSF test cases using ATS.

#### Note

Restart the NRF-client pod of BSF for UDR and CHF discovery as part of each test case.

#### 4.1.1 Prerequisites

To run Binding Support Function test cases, ensure that the following prerequisites are met:

- Deploy BSF 24.2.4 with default helm configurations using helm charts to run all test cases. The ATS version must be compatible with BSF 24.2.4. For more information on how to install BSF, see *Oracle Communications Cloud Native Core, Binding Support Function Installation, Upgrade, and Fault Recovery Guide*.
- Go-STUB must be installed in the same namespace where ocbf is installed.
- Add the following to Kubernetes namespace to grant role access:

PolicyRule:

| Resources                  | Non-Resource URLs | Resource Names | Verbs      |
|----------------------------|-------------------|----------------|------------|
| -----                      | -----             | -----          | -----      |
| pods/log                   | [ ]               | [ ]            | [get list] |
| configmaps                 | [ ]               | [ ]            | [watch get |
| list delete update create] |                   |                |            |
| pods                       | [ ]               | [ ]            | [watch get |
| list delete update create] |                   |                |            |
| secrets                    | [ ]               | [ ]            | [watch get |
| list delete update create] |                   |                |            |

|                            |    |    |            |
|----------------------------|----|----|------------|
| services                   | [] | [] | [watch get |
| list delete update create] |    |    |            |
| deployments.apps           | [] | [] | [watch get |
| list update]               |    |    |            |
| replicasets.apps           | [] | [] | [watch get |
| list update]               |    |    |            |
| deployments.extensions     | [] | [] | [watch get |
| list update]               |    |    |            |
| replicasets.extensions     | [] | [] | [watch get |
| list update]               |    |    |            |

- ATS Prometheus metrics validation works only when:
  - the metrics suffixes are not configured
  - installation has a single pod for each microservice in the BSF deployment
- You can customize test cases in the custom test case folders (cust\_newfeatures, cust\_regression and cust\_performance). You can add new test cases, remove unwanted test cases and modify existing test cases. It does not impact the original product packaged test cases available in the newfeatures, regression and performance folders respectively. For more details about custom test case folders, see [Custom Folder Implementation](#).
- Install Prometheus server in the cluster.
- Database cluster is in the running state with all required tables. Verify that there are no previous entries in the database before running test cases.
- Do not initiate a job in two different pipelines at the same time.
- For using Controlled Shutdown feature, ensure that enableControlledShutdown parameter is enabled on BSF during installation. If this parameter is not enabled, the test case for this feature will fail.
- In the application-config configmap, configure the following parameters with the respective values:
  - primaryNrfApiRoot=nf1stub.<namespace\_gostubs\_are\_deployed\_in>.svc:8080  
For example:  
primaryNrfApiRoot=nf1stub.ocats.svc:8080
  - secondaryNrfApiRoot=nf11stub.<namespace\_gostubs\_are\_deployed\_in>.svc:8080  
For example:  
secondaryNrfApiRoot=nf11stub.ocats.svc:8080
  - virtualNrfFqdn = nf1stub.<namespace\_gostubs\_are\_deployed\_in>.svc  
For example:  
virtualNrfFqdn=nf1stub.ocats.svc
- To enable ATS BSF GUI with the HTTPS protocol, the above mentioned application-config configmap related following parameters should be configured with the respective values:

```
# Please edit the object below. Lines beginning with '#' will be ignored,
# and an empty file will abort the edit. If an error occurs while saving
this file will be
# reopened with the relevant failures.
#
```



```

apiVersion: v1
data:
  profile: | -
    [appcfg]
    primaryNrfApiRoot=nf1stub.ocats.svc:8443
    secondaryNrfApiRoot=nf11stub.ocats.svc:8443
    nrfScheme=https
    virtualNrfPort=8443
    virtualNrfScheme=https

```

- Before running ATS Test suite, restart nrf-client-nfdiscovery and nrf-client-nfmanagement pods.

- Run the following command to get all the configmaps in your namespace.

```
kubectl get configmaps -n <BSF_namespace>
```


- Edit the alternate route service deployment pointing towards DNS Stub.

Run the following command to get searches information from dns-bind pod to enable communication between Alternate Route and dns-bind service.

```
kubectl exec -it <dns-bind pod> -n <NAMESPACE> -- /bin/bash -c
'cat /etc/resolv.conf' | grep search | tr ' ' '\n' | grep -v 'search'
```

Example:

**Figure 4-1 Editing Alternate Route Service deployment pointing towards DNS Stub**




```

[flanders@bastion-1 ~]$ kubectl exec -it ocdns-stub-ocdns-bind-7467cf56c8-5d9g2 -n flanders-ns -- /bin/bash -c 'cat /etc/resolv.conf' | grep search | tr
' ' '\n' | grep -v 'search'
flanders-ns.svc.inferno.lab.us.oracle.com
svc.inferno.lab.us.oracle.com
inferno.lab.us.oracle.com

```

By default, Alternate Route Service points to CoreDNS.

**Figure 4-2 Alternate Route Service settings in deployment file**



```

terminationMessagePolicy: File
dnsPolicy: ClusterFirst
restartPolicy: Always

```

Change the deployment file to add following content in alternate service to query DNS stub.


```
kubectl edit deployment ocsbf-occpn-alternate-route -n ocsbf
```

- \* Add the nameservers IPaddress.
- \* Add all the search information.

- \* Set dnsPolicy to None.

```
dnsConfig:
  nameservers:
    - <dns_stub_cluster_ip_address>
  searches:
    - dns-bind search
    - dns-bind search
    - dns-bind search
  dnsPolicy: None
```

**Figure 4-3 dnsConfig**



```
terminationMessagePolicy: File
dnsPolicy: ClusterFirst
restartPolicy: Always
```

- If Service Mesh check is enabled, create a destination rule to fetch the metrics from the Prometheus. For destination rule to communicate between TLS enabled entity (ATS) and non-TLS entity (Prometheus), Prometheus is kept outside of the service mesh. The rule can be created as follows:

```
kubectl apply -f - <<EOF

apiVersion:networking.istio.io/v1alpha3
kind:DestinationRule
metadata:
  name:prometheus-dr
  namespace:ocats
spec:
  host:oso-prometheus-server.ocbsf.svc.cluster.local
  trafficPolicy:
    tls:
      mode:DISABLE
EOF
```

- \* name: indicates the name of destination rule.
- \* namespace: indicates where the ATS is deployed.
- \* host: indicates the hostname of the prometheus server.
- For Bsf\_To\_Nrf\_Late\_Arrival feature file to be executed, nfInstanceId should be configured in Bsf\_To\_Nrf\_Late\_Arrival.yaml parameterization file. This nfInstanceId must be the same as the one under BSF nfInstanceId, that is configured during BSF installation. The nfInstanceId must to be configured in ATS UI under pipeline configuration (BSF\_NFINSTANCE\_ID).
- To ensure consistent functioning of ATS related to the audit service, modify the Audit deployment by reducing the value of

AUDIT\_NOTIFY\_SCHEDULER\_POLLING\_INTERVAL\_MILLISEC from 30000 to 1000 (changing from 30 seconds to 1 second).

```
$ kubectl get deploy -n ocbsf | grep 'audit' ocbsf-ocpm-audit-service
1/1      1      1      10h
```

```
$ kubectl edit deploy ocbsf-ocpm-audit-service -n ocbsf
```

The deployment will open. Scroll down until below fields are seen

- name: AUDIT\_NOTIFY\_SCHEDULER\_POLLING\_INTERVAL\_MILLISEC value: "30000"

Update the value of AUDIT\_NOTIFY\_SCHEDULER\_POLLING\_INTERVAL\_MILLISEC to 1000 if it isn't already.

## 4.1.2 Logging into ATS

Before logging into ATS GUI, it is important to get the worker node external IP and node port of the service, 'ocats-bsf'.

Run the following command to get the external IP for the worker node:

**Example:**

```
kubectl get nodes -owide
```

The output of the command is:

```
ocbsf-k8s-node-1      Ready    <none>    111d    v1.16.7    192.168.200.26
10.75.152.111    Oracle Linux Server 7.8
4.14.35-1902.303.5.3.el7uek.x86_64    containerd://1.2.10
```

Run the following command to get the nodeport:

```
kubectl get svc -n <BSF_namespace>
```

**Example:**

```
kubectl get svc -n ocbsf
```

The output of the command is:

```
ocbsf-ocats-ocats-bsf    LoadBalancer    10.233.53.144    10.75.225.49
8080:31944/TCP          19h
```

To log in to ATS, open the web browser and type the following URL:

`http://<Worker-Node-IP>:<Node-Port-of-ATS>`

If the 'ocats-bsf' Service has an external IP available, <SVC external IP> can also be used to log in to ATS.

http://<External IP of ATS Service>:8080

**Example:**

http://10.75.225.49:8080

## Running ATS

To run ATS test cases, perform the following steps:

1. Enter the **username** as bsfuser and **password** as bsfpasswd.
2. Click **Sign in**.

### Note

To modify default login password, see [Modifying Login Password](#).

**Figure 4-4 Pre-configured Pipelines**

**Oracle Communications Cloud Native Core**

**Automated Test Suite**

**CNCATS BSF : 24.2.0**

All

| S   | W | Name            | Last Success  | Last Failure | Last Duration | F   |
|-----|---|-----------------|---------------|--------------|---------------|-----|
| ... | ☀ | BSF_HealthCheck | N/A           | N/A          | N/A           | ▶ ☆ |
| ✓   | ☀ | BSF_NewFeatures | 15 hr #1      | N/A          | 7 min 35 sec  | ▶ ☆ |
| ✓   | ☁ | BSF_Regression  | 2 hr 5 min #3 | 13 hr #2     | 5 min 0 sec   | ▶ ☆ |

Icon: S M L

On successful log in, users should see the following pipelines:

- **BSF-NewFeatures:** This pipeline has all the new test cases delivered for BSF 24.2.4.
- **BSF-Performance:** This pipeline is not operational as of now. It is reserved for future releases of ATS.
- **BSF-HealthCheck:** This pipeline checks if BSF and ATS are deployed correctly. This shows only when the user has enabled this feature at the time of installing BSF ATS.
- **BSF-Regression:** This pipeline has all the test cases delivered in BSF ATS - 24.1.0


## 4.1.3 Running BSF\_NewFeatures Pipeline

### BSF\_NewFeatures Pipeline

This is a pre-configured pipeline where users can run all the BSF new test cases. To configure its parameters, which is a one time activity, perform the following steps:

1. Click **BSF\_NewFeatures** in the **Name** column and then, click **Configure** in the left navigation pane as shown below:

Figure 4-5 BSF New Feature Pipeline

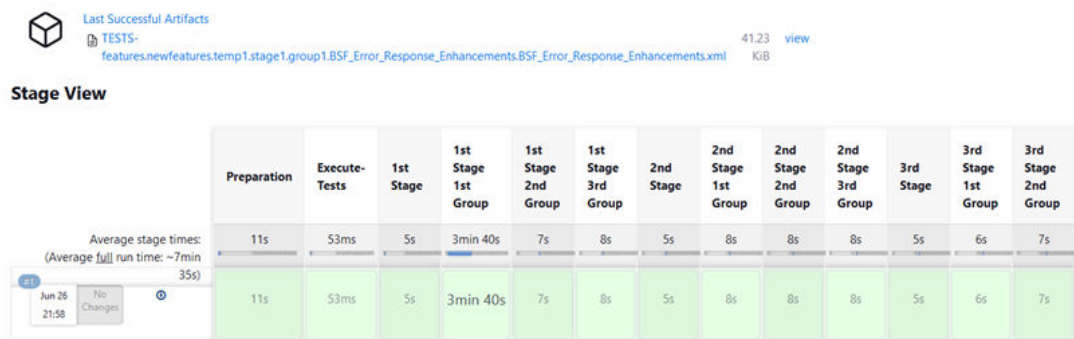

2. The BSF\_NewFeatures, **General** tab appears. Make sure that the screen loads completely.
3. Scroll-down to the end. The control moves from **General** tab to the **Pipeline** tab as shown below:

Script ?

```

7 //t = TIME_INT_POD_UP u = POD_UP_RETRIES v = ELK_WAIT_TIME w = ELK_HOST
8 //x = ELK_PORT y = STUB_LOG_COLLECTION z = LOG_METHOD A = svc_cfg_to_be_read B = bulk_import_to_complete
9
10 //Description of Variables:
11
12 //SELECTED_NF : BSF
13 //BSF_NAMESPACE : BSF Namespace:
14 //PROMSVC_NAME : Prometheus Server Service name
15 //GOSTUB_NAMESPACE : Gostub namespace
16 //SECURITY : secure or insecure
17 //BSF_NFINSTANCE_ID : nfInstanceId in BSF application-config config map
18 //POD_RESTART_TIME : Greater or equal to 45
19 //BSF_TIME : Greater or equal to 60
20 //NF_NOTIF_TIME : Greater or equal to 140
21 //PEER_CONNECTION_ESTABLISHMENT : Greater or equal to 30
22 //RERUN_COUNT : Rerun failing scenario count
23 //TIME_INT_POD_DOWN : The interval after which we check the POD status if its down

```

You can change the parameter values from "a" - to - "x" as per user requirement. The parameter details are available as comments from line number 2 - to - 7. In the **Script** area of the Pipeline section, you can change the values of the following parameters:

- **b:** Change this parameter to update the namespace where BSF was deployed in your bastion.
- **d:** Change this parameter to update the namespace where your gostubs are deployed in your bastion.
- **e:** Set this parameter as 'insecure', if you intend to run ATS in TLS disabled mode. Else, set this parameter as 'secure'.

- **f:** Configure this parameter to set BSF\_NFINSTANCE\_ID.
- **g:** Set a value more than 45 seconds for this parameter. The default wait time for the pod to come up is 45 seconds. Every TC requires restart of the nrf-client-management pod.
- **h:** Set a value more than 60 seconds for this parameter. The default wait time to add a configurations to the database is 60 secs.
- **i:** Set this parameter to more than 140 secs. The default wait time for Nf\_Notification Test Cases is given as 140 secs.
- **k:** Use this parameter to set the waiting time to initialize Test Suite.
- **l:** Use this parameter to set the waiting time to get response from Stub.
- **m:** Use this parameter to set the waiting time after adding BSF Configuration.
- **n:** Use this parameter to set the waiting time for Peer connection establishment.
- **o:** Use this parameter to set the waiting time before sending next message.
- **p:** Use this parameter to set Prometheus Server IP.
- **q:** Use this parameter to set Prometheus Server Port.
- **r:** Use this parameter to set the interval after which the POD status is checked when it is down.
- **s:** Use this parameter to set number of retry attempt in which will check the pod down status
- **t:** Use this parameter to set the interval after which we check the POD status if its UP.
- **u:** Use this parameter to set number of retry attempt in which will check the pod up status.
- **v:** Use this parameter to set Wait time to connect to Elastic Search.
- **w:** Use this parameter to set Elastic Search HostName.
- **x:** Use this parameter to set Elastic Search Port.
- **y:** Use this parameter to set To Enable/Disable Stub logs collection.
- **z:** Use this parameter to set Log collection endpoint either Elasticsearch or Kubernetes.
- **A:** Use this parameter to set Timer to wait for importing service configurations.
- **B:** Use bulk\_import\_to\_complete to add custom time in Jenkins post bulk imports.
- **C:** Use this parameter to set TLS version (1.2 or 1.3). The default value is 1.2.

(Optional) To collect application logs per failed scenario, user can configure the values for the following parameter:

- **z:** If you want log collection to happen through Elastic search, set the value for this parameter as Elasticsearch. If not, specify the value as Kubernetes. If you want to collect logs through Elastic search, it is required to configure the values for the following parameters:
  - **v:** Specifies the wait time to connect to Elastic search (ELK\_WAIT\_TIME).
  - **w:** Specifies the host name of Elastic search (ELK\_HOST). For example, occne-elastic-elasticsearch-master.occne-infra/
  - **x:** Specifies the port for Elastic search (ELK\_PORT). For example, 9200.

- **y**: If you want to collect stub logs, set the value for this parameter as yes. If not, specify the value as no.
4. Click **Save** after updating the parameter values. The **BSF\_NewFeatures** Pipeline page appears.

**Note**

It is recommended to save a copy of the pipeline script in your local machine that you may refer while restarting ATS pods.

**NOT\_SUPPORTED**

Do not modify anything other than the parameter values described in this section.

**Extracting Application Logs**

If any scenarios fail after running the pipeline job, perform the following steps:

1. Log in to the ATS pod:

```
kubectl exec -it pod/ocats-bsf-6f6dfc76b5-jbgzt -n ocbsf bash
```

2. Go to Jenkins build directory:

```
cd /var/lib/jenkins/.jenkins/jobs/BSF_Regression/builds/2
```

For example:

```
cd $JENKINS_HOME/jobs/$JOB_NAME/builds/$BUILD_NUMBER/
```

3. Extract the applogs.zip file:

```
unzip applogs.zip
```

4. After successfully unzipping the file, open the applog folder to view the pod logs for failed scenarios:

```
(env) [jenkins@ocats-bsf-6f6dfc76b5-jbgzt applog]$ pwd
/var/lib/jenkins/.jenkins/jobs/BSF_Regression/builds/2/applog
(env) [jenkins@ocats-bsf-6f6dfc76b5-jbgzt applog]$ ls -ltrh
total 760K
-rw-r--r--. 1 jenkins jenkins 250K Nov 19 11:08 Initial_Run-
Register_BSF_With_NFSetIDList.log
-rw-r--r--. 1 jenkins jenkins 249K Nov 19 11:08 1st_Rerun-
Register_BSF_With_NFSetIDList.log
-rw-r--r--. 1 jenkins jenkins 255K Nov 19 11:09 2nd_Rerun-
Register_BSF_With_NFSetIDList.log
```

**Running BSF Test Cases**

To run BSF test cases, perform the following steps:

1. Click the **Build with Parameters** link available in the left navigation pane of the **BSF\_NewFeatures** Pipeline screen. The following page appears.

**Figure 4-6 BSF New Features Build with Parameters**

Dashboard > BSF\_NewFeatures >

**Oracle Communications Cloud Native Core**

**Automated Test Suite - BSF**

**EXECUTION OPTIONS**

|                               |                                      |                      |                          |
|-------------------------------|--------------------------------------|----------------------|--------------------------|
| TestSuite<br>NewFeatures      | Configuration_Type<br>Product_Config | FilterWithTags<br>NO | Include_Regression<br>NO |
| Fetch_Log_Upon_Failure<br>YES |                                      |                      |                          |

**FEATURES AND TESTCASES**

Features: All

Stage: stage1

Group: group1

- BSF\_Error\_Response\_Enhancements

**Build** Cancel

**Note**

Make sure that the value of **FilterWithTags** and **Include\_NewFeatures** is selected as **NO**.

2. If you want to collect logs for any given build, select YES from the drop-down menu of **Fetch\_Log\_Upon\_Failure**.
3. Click **Build** and select **Console Output** to view the test results. The following is a sample test result output:

**Figure 4-7 Sample: Test Result Output in Console**

**Console Output**

```
Started by user bsfuser
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/.jenkins/workspace/BSF_NewFeatures
[Pipeline] {
[Pipeline] withEnv
[Pipeline] {
[Pipeline] sh
+ sh /var/lib/jenkins/ocbsf_tests/preTestConfig-NewFeatures-BSF.sh -a BSF -b o-devops-bsf11 -c ocne-prometheus-server -d o-devops-bsf11 -e secure -f fe7d992b-0541-4c7d-ab84-c6d70b1b0666 -g 45 -h 60 -i 140 -j 2 -k 0 -l 1 -m 1 -n 30 -o 1 -p ocne-prometheus-server.ocne-infra -q 80 -r 30 -s 5 -t 30 -u 10 -v 0 -w ocne-elastic-elasticsearch-master.ocne-infra -x 9200 -y yes -z kubernetes -A 15 -B 120 -C 1.2
export NF=BSF
export BSF_Namespace=o-devops-bsf11
export gostub_namespace=o-devops-bsf11
export SECURITY=secure
export bsf_nInstanceId=fe7d992b-0541-4c7d-ab84-c6d70b1b0666
export pod_restart_wait=45
export bsf_add_wait=60
export nrif_notif_wait=140
export RERUN_COUNT=2
export test_suite_to_initialize=0
export stub_response_to_be_set=1
export bsf_configuration_addition=1
```



**Note**

For more details on consolidated test report, see [Managing Final Summary Report, Build Color, and Application Log](#).

**Queuing Jenkins Jobs**

Using this feature, you can queue a second job even when current job is still running. The second job can be triggered either from the same or a different pipeline.

The following table lists various scenarios on how queuing works:

**Table 4-1 Queuing Jenkins Jobs**

| Concurrent Builds | New Features Current Build | New Features New Build | Regression Current Build | Regression New Build Build | Result                                       |
|-------------------|----------------------------|------------------------|--------------------------|----------------------------|----------------------------------------------|
| Enabled           | Running                    | Triggered              | NA                       | NA                         | New-Build of New-Features is added to queue. |
| Enabled           | Running                    | NA                     | NA                       | Triggered                  | New-Build of Regression is added to queue.   |
| Disabled          | NA                         | NA                     | Running                  | Triggered                  | New-Build of Regression is added to queue.   |
| Disabled          | NA                         | Triggered              | Running                  | NA                         | New-Build of New-Features is added to queue. |

## 4.1.4 Running BSF\_HealthCheck Pipeline

This is a pre-configured pipeline where ATS performs a test probe with SUT. It triggers helm test & provides the results in Jenkins Console Logs.

You can run BSF\_HealthCheck pipeline to check if all BSF pods are up and running. If yes, it provides the status as successful. If any pod is down due to any reason, then the pipeline fails.

To configure the parameters for **BSF\_HealthCheck** pipeline, perform the following steps:

1. Click **BSF\_HealthCheck** in the **Name** column.
2. Click **Configure** in the left navigation pane.
3. When you scroll-down, the **General** tab becomes active. Be sure that the screen loads completely.
4. Continue scrolling down until the **Pipeline** tab becomes active. The following is a screen capture that shows the Pipeline script:

**Figure 4-8 Helm Test Script**

```

1 node{
2   def myVar = 'initial_value'
3   def buildVar = 'initial_value'
4   properties{
5     [
6       parameters{
7         [string(defaultValue: '', name: 'Helm_releases',description: "Provide Release Name with Comma Separated if more than 1"),
8         string(defaultValue: '', name: 'Namespace', description: "Provide the namespace")]
9       ]
10    ]
11  }
12  stage('Helm-Test-Init') {
13    catchError(buildResult: 'SUCCESS', stageResult: 'UNSTABLE') {
14      //a = helm releases [Provide Release Name with Comma Separated if more than 1 ]
15      //b= Namespace, If not applicable then remove the argument
16      //c= helm releases [Provide Release Name with Comma Separated if more than 1 ]
17    }
18  }

```

- In the Script area under the Pipeline section, users may customize the values for the following parameters:

**NOT\_SUPPORTED**

Do not modify values of parameters other than the ones described in this section.


- a:** Change this parameter to update the helm release name where BSF is deployed in your bastion.
  - b:** Change this parameter to update the namespace where BSF is deployed in your bastion.
- Click **Save** to update the values.

**Running Helm Test**

To run BSF test cases, click **Build Now**.

## 4.1.5 BSF\_NewFeatures Documentation

To view BSF functionalities, go to **BSF\_NewFeatures** pipeline. and click **Documentation** link in the left navigation pane.

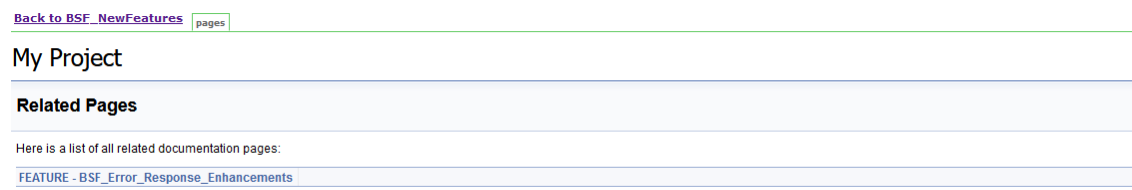**Figure 4-9 BSF\_NewFeatures Feature List Documentation**

Click any functionality to view its test cases and scenarios of each test case. For example, when you click **FEATURE - BSF\_Error\_Response\_Enhancements**, the following test description appears:

**Figure 4-10 Test Cases and Scenarios of Feature - BSF\_Error\_Response\_Enhancements**

[Back to BSF\\_NewFeatures](#) [pages](#) [Zin](#)

My Project

**FEATURE - BSF\_Error\_Response\_Enhancements**

This feature aims to provide error details framework and BSF as a producer.

**Pre-conditions:**

- #1.Create Test setup to run the test
- #2.Setup the BSF service clients
- #3.Set logging levels to debug
- #4.Import Error Handling Configuration
- #5.Disabled the Subscriber activity logging

**SCENARIO: To verify when we send a POST request with an invalid message format, the error response generated has error code 400.**

- #1.Send a pcfBinding Register request with IpV4Addr and MacAddr
- #2.Validate error code 400 is generated and no binding created
- #3.Validation of the metrics

**SCENARIO: To verify when we send a POST request with an Mandatoy IE Incorrect, the error response generated has error code 400 and cause Mandatory IE Incorrect**

**1.Send a pcfBinding Register request with IpV4Addr and MacAddr**

Based on the functionalities covered under **Documentation**, the **Build Requires Parameters** screen displays test cases. To navigate back to the pipeline BSF-NewFeatures screen, click **Back to BSF\_NewFeatures** link available on top left corner of the screen.

### Test Result Analyzer

Using the Test Result Analyzer plug-in available in ATS, user can view consolidated and detailed reports. For more information, see [Test Results Analyzer](#) section.

### Test Case Mapping to Features and Display Total Counts

With this feature, users can view Total Count of Features, TestCases/Scenarios and TestCase mapping to each Feature of BSF in ATS View. For more information, see [Support for Test Case Mapping and Count](#) section.

## 4.1.6 Running BSF Regression Pipeline

This section describes how to run test cases for Binding Support Function (BSF) Regression pipeline.

The **BSF\_Regression** pipeline is a pre-configured pipeline where all the test cases of previous releases are available. For example, for BSF 24.2.3, this pipeline has all the test cases released till BSF 24.1.0.


To view **BSF\_Regression** pipeline details, perform the following steps:

1. Click **BSF\_Regression** in the **Name** column.
2. Click **Build with Parameters** in the left navigation pane.

Copy the required test cases that are available in the BSF folder and place them appropriately within the **custom** folder for BSF\_Regression. Reload the page to view the test cases available in the **custom** Regression folder.

Click **Build**.

Figure 4-11 BSF\_Regression Pipeline

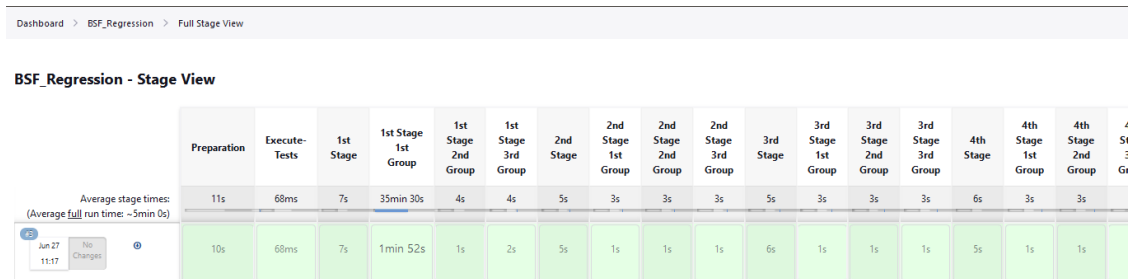

### Note

The Regression pipeline does not have any sanity option. However, users must perform all the steps performed in the **BSF\_NewFeatures** pipeline. Ensure that the pipeline script is configured according to the environment variables.

## 4.1.7 BSF\_Regression Documentation

This section describes the documentation for **BSF\_Regression** pipeline.

To view the documentation for any of the BSF features, on the ATS home page, click **BSF\_Regression**. Then, click **Documentation** in the left navigation pane.

This page shows features of only those test cases that are released in previous releases.

Figure 4-12 BSF\_Regression Features Documentation



## 4.2 Running NEF Test Cases using ATS

This section describes how to run Network Exposure Function (NEF) test cases using ATS. It includes:

- [Prerequisites](#)
- [Logging into ATS](#)
- [NEF-NewFeatures Pipeline](#)
- [NEF-NewFeatures Documentation](#)

## 4.2.1 Prerequisites

To run NEF test cases, ensure that the following prerequisites are met:

- The ATS version must be compatible with the NEF release.
- The NEF, ATS, Stub, and CNC Console must be deployed in the same namespace.
- The NEF must be deployed using the appropriate custom values.yaml file as per the configuration to be tested. The custom values.yaml file is available with the NEF documentation package. Ensure that you deploy the NEF for ATS using the correct custom value file based on the selected NEF configuration. For more information about the ATS configurations for different NEF feature test cases, see [NEF-NewFeatures Pipeline](#) and [NEF-Regression Pipeline](#).

### Note

The following feature is added in **NEF-NewFeaturesPipeline** for the release 24.2.0:

- CAPIF Integration with the CNC Console
- Wrapper APIs to Support CAPIF Functionality in CNC Console

NEF provides a set of nineteen custom value files that can be used to customize the NEF deployment for ATS. The following table describes the mapping between the combination of the selected communication model and feature configurations for running NEF testcases and the custom value file to be used for NEF deployment for ATS:

### New Feature Pipeline

**Table 4-2 Custom Value File for NewFeaturesPipeline for NEF deployment**

| NEF Execute Suite | NEF Suite Configuration | Custom Values File to be used for NEF Deployment |
|-------------------|-------------------------|--------------------------------------------------|
| CNCC              | CNCC-Capif              | oc-nef-custom-values-ats-cncc.yaml               |
| CAPIF             | CAPIF-API               | oc-capif-custom-values-ats.yaml                  |

### Regression Pipeline

**Table 4-3 Custom Value File for Regression Pipeline for NEF deployment**

| Supported Communication Model | NEF Suite Configuration | Custom Values File to be used for NEF Deployment |
|-------------------------------|-------------------------|--------------------------------------------------|
| CAPIF                         | CAPIF-Event Manager     | oc-capif-custom-values-ats.yaml                  |
|                               | CAPIF-Functionality     | oc-capif-custom-values-ats.yaml                  |
| CNCC                          | CNCC-NEF                | oc-nef-custom-values-ats-cncc.yaml               |

Table 4-3 (Cont.) Custom Value File for Regression Pipeline for NEF deployment

| Supported Communication Model | NEF Suite Configuration                 | Custom Values File to be used for NEF Deployment                                                                                                                                                                                                                                                                                                                                |
|-------------------------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Nef Model-A                   | ME-Location Reporting-GMLC              | oc-nef-custom-values-ats-gmlc-bsf-modelA.yaml                                                                                                                                                                                                                                                                                                                                   |
|                               | ME-Location Reporting-UDM               | oc-nef-custom-values-ats-udm-udr-modelA.yaml                                                                                                                                                                                                                                                                                                                                    |
|                               | ME-Location Reporting-GMLC-Failover-UDM | oc-nef-custom-values-ats-pcf-gmlcfailoverudm-modelA.yaml                                                                                                                                                                                                                                                                                                                        |
|                               | AsQos+CHF_PCF                           | oc-nef-custom-values-ats-pcf-gmlcfailoverudm-modelA.yaml                                                                                                                                                                                                                                                                                                                        |
|                               | AsQos+CHF_BSF                           | oc-nef-custom-values-ats-gmlc-bsf-modelA.yaml                                                                                                                                                                                                                                                                                                                                   |
|                               | TI_PCF                                  | oc-nef-custom-values-ats-pcf-gmlcfailoverudm-modelA.yaml                                                                                                                                                                                                                                                                                                                        |
|                               | TI_BSF                                  | oc-nef-custom-values-ats-gmlc-bsf-modelA.yaml                                                                                                                                                                                                                                                                                                                                   |
|                               | TI_UDR                                  | oc-nef-custom-values-ats-udm-udr-modelA.yaml                                                                                                                                                                                                                                                                                                                                    |
|                               | ME - SCEF+NEF                           | oc-nef-custom-values-ats-udm-udr-modelA.yaml<br>In oc-nef-custom-values-ats-udm-udr-modelA.yaml file update the parameter as below:<br><br>convergedScefNef:<br>&diamGatewayEnable true<br><br>convergedME: &convergedME true<br><br><b>Simulator update:</b><br>In ocstub-nef-custom-values.yaml file, update the parameter as below:<br><br>ocstub-diam-nef:<br>enabled: true |
|                               | ME - PDU Session                        | oc-nef-custom-values-ats-udm-udr-modelA.yaml                                                                                                                                                                                                                                                                                                                                    |
|                               | ME - Loss of Connectivity               | oc-nef-custom-values-ats-udm-udr-modelA.yaml                                                                                                                                                                                                                                                                                                                                    |
|                               | ME - UeReachability                     | oc-nef-custom-values-ats-udm-udr-modelA.yaml                                                                                                                                                                                                                                                                                                                                    |

Table 4-3 (Cont.) Custom Value File for Regression Pipeline for NEF deployment

| Supported Communication Model | NEF Suite Configuration | Custom Values File to be used for NEF Deployment                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | Qos+CHF - SCEF+NEF      | <p>oc-nef-custom-values-ats-udm-udr-modelA.yaml<br/>In oc-nef-custom-values-ats-udm-udr-modelA.yaml file update the parameter as below:</p> <pre>convergedScefNef: &amp;diamGatewayEnable true</pre> <p><b>Simulator update:</b><br/>In ocstub-nef-custom-values.yaml file, update the parameter as below:</p> <pre>ocstub-diam-nef: enabled: true</pre> <pre>pcf:   throwexception: true   switchToPCRFOnAuthFailure: true</pre>                     |
|                               | Device Trigger          | <p>oc-nef-custom-values-ats-udm-udr-modelA.yaml<br/>In oc-nef-custom-values-ats-udm-udr-modelA.yaml file update the parameter as below:</p> <pre>convergedScefNef: &amp;diamGatewayEnable true deviceTrigger: true</pre> <p><b>Simulator update:</b><br/>In ocstub-nef-custom-values.yaml file, update the parameter as below:</p> <pre>ocstub-diam-nef: enabled: true</pre> <pre>pcf:   throwexception: true   switchToPCRFOnAuthFailure: true</pre> |

Table 4-3 (Cont.) Custom Value File for Regression Pipeline for NEF deployment

| Supported Communication Model | NEF Suite Configuration                                                                                                                                                                                                       | Custom Values File to be used for NEF Deployment                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | Msisdnless-MO-SMS                                                                                                                                                                                                             | <p>oc-nef-custom-values-ats-udm-udr-modelA.yaml<br/>In the above file update the parameters as below:</p> <pre>msisdnless_mo_sms: true uncomment # -"ocnef-msisdnlessmosms" under appinfo: section</pre> <p>convergedScefNef:<br/>&amp;diamGatewayEnable true</p> <p><b>Simulator update:</b><br/>In ocstub-nef-custom-values.yaml file, update the parameter as below:</p> <pre>ocstub-diam-nef: enabled: true</pre> |
| Nef Model-B                   | ME-Location Reporting-GMLC                                                                                                                                                                                                    | oc-nef-custom-values-ats-gmlc-bsf-modelB.yaml                                                                                                                                                                                                                                                                                                                                                                         |
|                               | ME-Location Reporting-UDM                                                                                                                                                                                                     | oc-nef-custom-values-ats-udm-udr-modelB.yaml                                                                                                                                                                                                                                                                                                                                                                          |
|                               | ME-Location Reporting-GMLC-Failover-UDM<br><b>Note:</b> When this configuration is selected, the simulators must be re-installed by changing the gmlc fqdn to some random values under the nrf configurations as shown below: | oc-nef-custom-values-ats-pcf-gmlcfailoverudm-modelB.yaml                                                                                                                                                                                                                                                                                                                                                              |
|                               | <pre>nrf:   gmlcHost: "http:// ocnefsim-ocstub-svc-gmlc- wrong:1010"</pre> <p>Then, revert back to the value made under the nrf stub.</p>                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                               | AsQos+CHF_PCF                                                                                                                                                                                                                 | oc-nef-custom-values-ats-pcf-gmlcfailoverudm-modelB.yaml                                                                                                                                                                                                                                                                                                                                                              |
|                               | AsQos+CHF_BSF                                                                                                                                                                                                                 | oc-nef-custom-values-ats-gmlc-bsf-modelB.yaml                                                                                                                                                                                                                                                                                                                                                                         |
|                               | TI_PCF                                                                                                                                                                                                                        | oc-nef-custom-values-ats-pcf-gmlcfailoverudm-modelB.yaml                                                                                                                                                                                                                                                                                                                                                              |
|                               | TI_BSF                                                                                                                                                                                                                        | oc-nef-custom-values-ats-gmlc-bsf-modelB.yaml                                                                                                                                                                                                                                                                                                                                                                         |
|                               | TI_UDR                                                                                                                                                                                                                        | oc-nef-custom-values-ats-udm-udr-modelB.yaml                                                                                                                                                                                                                                                                                                                                                                          |



Table 4-3 (Cont.) Custom Value File for Regression Pipeline for NEF deployment

| Supported Communication Model | NEF Suite Configuration   | Custom Values File to be used for NEF Deployment                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | ME - SCEF+NEF             | oc-nef-custom-values-ats-udm-udr-modelB.yaml<br>In oc-nef-custom-values-ats-udm-udr-modelB.yaml file update the parameter as below:<br><br>convergedScefNef:<br>&diamGatewayEnable true<br><br><b>Simulator update:</b><br>In ocstub-nef-custom-values.yaml file, update the parameter as below:<br><br>ocstub-diam-nef:<br>enabled: true                                                                        |
|                               | ME - PDU Session          | oc-nef-custom-values-ats-udm-udr-modelB.yaml                                                                                                                                                                                                                                                                                                                                                                     |
|                               | ME - Loss of Connectivity | oc-nef-custom-values-ats-udm-udr-modelB.yaml                                                                                                                                                                                                                                                                                                                                                                     |
|                               | ME - UeReachability       | oc-nef-custom-values-ats-udm-udr-modelB.yaml                                                                                                                                                                                                                                                                                                                                                                     |
|                               | Qos+CHF - SCEF+NEF        | oc-nef-custom-values-ats-udm-udr-modelB.yaml<br>In oc-nef-custom-values-ats-udm-udr-modelB.yaml file update the parameter as below:<br><br>convergedScefNef:<br>&diamGatewayEnable true<br><br><b>Simulator update:</b><br>In ocstub-nef-custom-values.yaml file, update the parameter as below:<br><br>ocstub-diam-nef:<br>enabled: true<br><br>pcf:<br>throwexception: true<br>switchToPCRFOnAuthFailure: true |

Table 4-3 (Cont.) Custom Value File for Regression Pipeline for NEF deployment

| Supported Communication Model | NEF Suite Configuration                 | Custom Values File to be used for NEF Deployment                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | Device Trigger                          | <p>oc-nef-custom-values-ats-udm-udr-modelB.yaml<br/>In oc-nef-custom-values-ats-udm-udr-modelB.yaml file update the parameter as below:</p> <pre>convergedScefNef: &amp;diamGatewayEnable true deviceTrigger: true</pre> <p><b>Simulator update:</b><br/>In ocstub-nef-custom-values.yaml file, update the parameter as below:</p> <pre>ocstub-diam-nef: enabled: true</pre> <pre>pcf:   throwexception: true   switchToPCRFOnAuthFailure: true</pre> |
|                               | Msisdnless-MO-SMS                       | <p>oc-nef-custom-values-ats-udm-udr-modelB.yaml<br/>In the above file update the parameters as below:</p> <pre>msisdless_mo_sms: true uncomment # - "ocnef-msisdlessmosms" under appinfo: section</pre> <pre>convergedScefNef: &amp;diamGatewayEnable true</pre> <p><b>Simulator update:</b><br/>In ocstub-nef-custom-values.yaml file, update the parameter as below:</p> <pre>ocstub-diam-nef: enabled: true</pre>                                  |
| Nef Model-D                   | ME-Location Reporting-GMLC              | oc-nef-custom-values-ats-gmlc-bsf-modelD.yaml                                                                                                                                                                                                                                                                                                                                                                                                         |
|                               | ME-Location Reporting-UDM               | oc-nef-custom-values-ats-udm-udr-modelD.yaml                                                                                                                                                                                                                                                                                                                                                                                                          |
|                               | ME-Location Reporting-GMLC-Failover-UDM | oc-nef-custom-values-ats-pcf-gmlcfailoverudm-modelD.yaml                                                                                                                                                                                                                                                                                                                                                                                              |
|                               | AsQos+CHF_PCF                           | oc-nef-custom-values-ats-pcf-gmlcfailoverudm-modelD.yaml                                                                                                                                                                                                                                                                                                                                                                                              |
|                               | AsQos+CHF_BSF                           | oc-nef-custom-values-ats-gmlc-bsf-modelD.yaml                                                                                                                                                                                                                                                                                                                                                                                                         |

Table 4-3 (Cont.) Custom Value File for Regression Pipeline for NEF deployment

| Supported Communication Model | NEF Suite Configuration   | Custom Values File to be used for NEF Deployment                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | TI_PCF                    | oc-nef-custom-values-ats-pcf-gmlcfailoverudm-modelID.yaml                                                                                                                                                                                                                                                                                                                                                                                   |
|                               | TI_BSF                    | oc-nef-custom-values-ats-gmlc-bsf-modelID.yaml                                                                                                                                                                                                                                                                                                                                                                                              |
|                               | TI_UDR                    | oc-nef-custom-values-ats-udm-udr-modelID.yaml                                                                                                                                                                                                                                                                                                                                                                                               |
|                               | ME - SCEF+NEF             | <p>oc-nef-custom-values-ats-udm-udr-modelID.yaml<br/>In oc-nef-custom-values-ats-udm-udr-modelID.yaml file update the parameter as below:</p> <p>convergedScefNef:<br/>&amp;diamGatewayEnable true</p> <p><b>Simulator update:</b><br/>In ocstub-nef-custom-values.yaml file, update the parameter as below:</p> <p>ocstub-diam-nef:<br/>enabled: true</p>                                                                                  |
|                               | ME - PDU Session          | oc-nef-custom-values-ats-udm-udr-modelID.yaml                                                                                                                                                                                                                                                                                                                                                                                               |
|                               | ME - Loss of Connectivity | oc-nef-custom-values-ats-udm-udr-modelID.yaml                                                                                                                                                                                                                                                                                                                                                                                               |
|                               | ME - UeReachability       | oc-nef-custom-values-ats-udm-udr-modelID.yaml                                                                                                                                                                                                                                                                                                                                                                                               |
|                               | Qos+CHF - SCEF+NEF        | <p>oc-nef-custom-values-ats-udm-udr-modelID.yaml<br/>In oc-nef-custom-values-ats-udm-udr-modelID.yaml file update the parameter as below:</p> <p>convergedScefNef:<br/>&amp;diamGatewayEnable true</p> <p><b>Simulator update:</b><br/>In ocstub-nef-custom-values.yaml file, update the parameter as below:</p> <p>ocstub-diam-nef:<br/>enabled: true</p> <p>pcf:<br/>    throwexception: true<br/>    switchToPCRFOnAuthFailure: true</p> |

Table 4-3 (Cont.) Custom Value File for Regression Pipeline for NEF deployment

| Supported Communication Model | NEF Suite Configuration | Custom Values File to be used for NEF Deployment                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | Device Trigger          | <p>oc-nef-custom-values-ats-udm-udr-modelID.yaml<br/>In oc-nef-custom-values-ats-udm-udr-modelID.yaml file update the parameter as below:</p> <pre> convergedScefNef: &amp;diamGatewayEnable true deviceTrigger: true </pre> <p><b>Simulator update:</b><br/>In ocstub-nef-custom-values.yaml file, update the parameter as below:</p> <pre> ocstub-diam-nef: enabled: true </pre> <pre> pcf:   throwexception: true   switchToPCRFOnAuthFailure: true </pre> |
|                               | Msisdnless-MO-SMS       | <p>oc-nef-custom-values-ats-udm-udr-modelID.yaml<br/>In the above file update the parameters as below:</p> <pre> msisdnless_mo_sms: true uncomment # - "ocnef-msisdnlessmosms" under appinfo: section </pre> <pre> convergedScefNef: &amp;diamGatewayEnable true </pre> <p><b>Simulator update:</b><br/>In ocstub-nef-custom-values.yaml file, update the parameter as below:</p> <pre> ocstub-diam-nef: enabled: true </pre>                                 |

For more information about the NEF installation, see *Oracle Communications Cloud Native Core, Network Exposure Function Installation, Upgrade, and Fault Recovery Guide*.

- ATS Prometheus metrics validation works only when the installation has a single pod for each microservice in the NEF deployment.
- You can customize test cases in the custom test case folders (cust\_newfeatures, cust\_regression and cust\_performance). You can add new test cases, remove unwanted

test cases, and modify existing test cases. It does not impact the original product packaged test cases available in the newfeatures, regression, and performance folders respectively. For more details about custom test case folders, see [Custom Folder Implementation](#).

- Install Prometheus server in the cluster.
- Database cluster is in the running state with all required tables. Verify that there are no previous entries in the database before running test cases.
- Do not initiate a job in two different pipelines at the same time.

## 4.2.2 Logging into ATS

Before logging into ATS, you need to ensure that ATS is deployed successfully using HELM charts as shown below:

### Note

To modify default log in password, refer to [Modifying Login Password](#).

**Figure 4-13 Verifying ATS Pod**

|                                                 |     |         |             |       |
|-------------------------------------------------|-----|---------|-------------|-------|
| mysql-ocnef-6c6cf46765-xwtbq                    | 1/1 | Running | 1 (18d ago) | 40d   |
| nefats-ocats-78f58df796-nv68f                   | 1/1 | Running | 0           | 11d   |
| occapif-afmgr-cc5944c84-bt5d5                   | 1/1 | Running | 0           | 7d3h  |
| occapif-apimgr-7df5d59887-c866p                 | 1/1 | Running | 0           | 7d8h  |
| occapif-eventmgr-6c5cc74949-728k6               | 1/1 | Running | 0           | 7d8h  |
| occapif-ext-egress-gateway-757fcb8f67-8grmc     | 1/1 | Running | 0           | 7d8h  |
| occapif-ext-ingress-gateway-6c5fbc8bdd-2g79v    | 1/1 | Running | 0           | 7d8h  |
| occapif-network-egressgateway-8688974b8d-qgwg6  | 1/1 | Running | 0           | 7d8h  |
| occapif-network-ingressgateway-5fbfdb5755-s76ck | 1/1 | Running | 0           | 7d8h  |
| occncc-acore-ingress-gateway-8c47c6685-kqrzn    | 1/1 | Running | 0           | 7d1h  |
| occncc-iam-ingress-gateway-5598c65fb6-g5tpl     | 1/1 | Running | 0           | 7d21h |
| occncc-iam-kc-0                                 | 2/2 | Running | 0           | 7d21h |
| occncc-mcore-cmservice-84dd4754c5-985gg         | 1/1 | Running | 0           | 7d1h  |
| occncc-mcore-ingress-gateway-59c7cb7478-whp89   | 1/1 | Running | 0           | 7d1h  |
| ocnef-aef-apirouter-579bc98bb4-v7wqv            | 1/1 | Running | 0           | 7d7h  |
| ocnef-apdmanager-56cbb758b4-stkhh               | 1/1 | Running | 0           | 6d17h |
| ocnef-appinfo-5f96955868-bh585                  | 1/1 | Running | 0           | 7d7h  |
| ocnef-config-server-64648d5d69-qppjt            | 1/1 | Running | 0           | 7d7h  |
| ocnef-consoledataservice-856b897875-55xwj       | 1/1 | Running | 0           | 19h   |
| ocnef-devicetrigger-5699f8994b-shh5v            | 1/1 | Running | 0           | 6d17h |
| ocnef-ext-nef-egress-gateway-547bccdc9-4rhs5    | 1/1 | Running | 0           | 7d7h  |
| ocnef-ext-nef-ingress-gateway-6cff9fd75d-4vvgm  | 1/1 | Running | 0           | 7d7h  |
| ocnef-fivegc-egress-gateway-79df4dff7-2z97h     | 1/1 | Running | 0           | 7d7h  |
| ocnef-fivegc-ingress-gateway-5f4ff45fb4-qt7fl   | 1/1 | Running | 0           | 7d7h  |
| ocnef-fivegcagent-686b49d77-xpxsr               | 1/1 | Running | 0           | 19h   |
| ocnef-monitoringevents-c47c769bf-mqr5f          | 1/1 | Running | 0           | 19h   |
| ocnef-msisdnlessmosms-58cd864998-lvdw4          | 1/1 | Running | 0           | 19h   |

**Figure 4-14 Verifying ATS Pod for Stubs**

|                                           |     |         |   |     |
|-------------------------------------------|-----|---------|---|-----|
| ocnefsim-ocstub-diam-nef-7d8b7fd6c7-x8qqL | 1/1 | Running | 0 | 61m |
| ocnefsim-ocstub-nef-af-5764f446fc-v45g7   | 1/1 | Running | 0 | 61m |
| ocnefsim-ocstub-nef-bsf-69d8c95d7f-jfh5   | 1/1 | Running | 0 | 61m |
| ocnefsim-ocstub-nef-chf-5668c59456-kclqr  | 1/1 | Running | 0 | 61m |
| ocnefsim-ocstub-nef-gmlc-65865c5d6d-wfnx8 | 1/1 | Running | 0 | 61m |
| ocnefsim-ocstub-nef-nrf-78cfc96dd4-4tmx5  | 1/1 | Running | 0 | 61m |
| ocnefsim-ocstub-nef-pcf-68f7f89df6-djrf2  | 1/1 | Running | 0 | 61m |
| ocnefsim-ocstub-nef-udm-787dccfb78-2tth8  | 1/1 | Running | 0 | 61m |
| ocnefsim-ocstub-nef-udr-78589cc4b5-7crns  | 1/1 | Running | 0 | 61m |

For more information on verifying ATS deployment, see [Verifying ATS Deployment](#).

To log in to ATS, open a browser and provide the IP Address and port details as <Worker-Node-IP>:<Node-Port-of-ATS>.

**Figure 4-15 ATS Login**

### Oracle Communications Cloud Native Core - Automated Test Suite

Welcome to ATS!

Username:

Password:

☐

Keep me signed in

### Running ATS

To run ATS:

1. Enter the login credentials. Click **Sign in**. The following screen appears.

**Figure 4-16 NEF Pre-Configured Pipelines**

Dashboard >

+ New Item

People

Build History

My Views

All

**Build Queue**

No builds in the queue.

**Build Executor Status**

1 Idle

2 Idle

3 Idle

Icon: S M L

Icon legend

Atom feed for all

Atom feed for failures

Atom feed for just latest builds

**Oracle Communications Cloud Native Core**

**Automated Test Suite**

| S | W | Name            | Last Success | Last Failure | Last Duration |
|---|---|-----------------|--------------|--------------|---------------|
|   |   | NEF-NewFeatures | N/A          | N/A          | N/A           |
|   |   | NEF-Performance | N/A          | N/A          | N/A           |
|   |   | NEF-Regression  | N/A          | N/A          | N/A           |

NEF ATS has three pre-configured pipelines.

- **NEF-NewFeatures:** This pipeline has all the test cases delivered as part of NEF ATS - 24.2.0.

#### Note

The following feature is added in **NEF-NewFeaturesPipeline** for the release 24.2.0:

- CAPIF Integration with the CNC Console
- Wrapper APIs to Support CAPIF Functionality in CNC Console

- **NEF-Performance:** This pipeline is not operational as of now. It is reserved for future releases of ATS.
- **NEF-Regression:** This pipeline has all the test cases delivered so far in the previous releases, along with Monitoring Event support for update operation added under UDM functionality.


## 4.2.3 NEF-NewFeatures Pipeline

### NEF-NewFeatures Pipeline

This is a pre-configured pipeline where users can run all the NEF new test cases. To configure its parameters, which is a one time activity, perform the following steps:

1. Click **NEF-NewFeatures** in the **Name** column. The following screen appears:

**Figure 4-17 Configuring NEF-New Features**

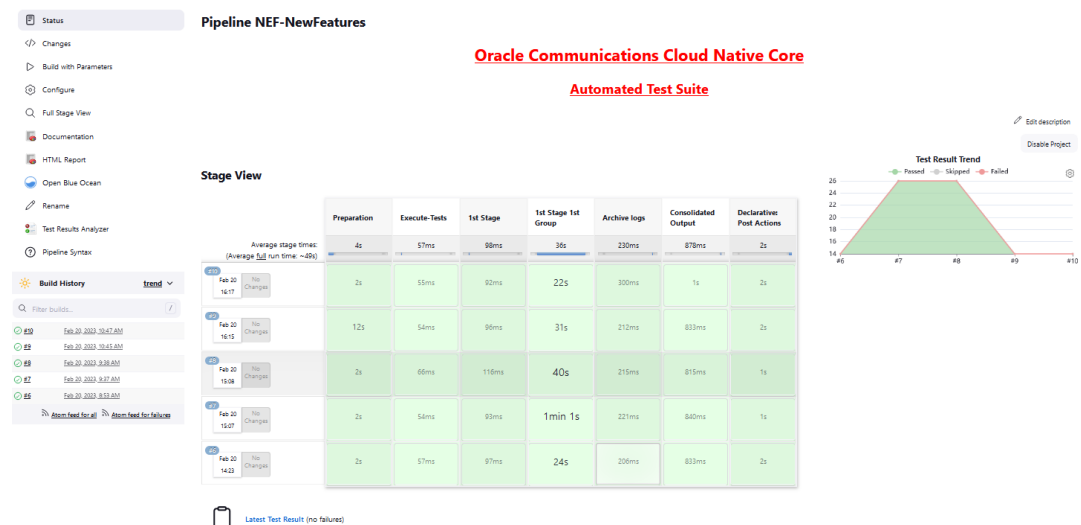


In the above screen:

- Click **Configure** to configure NEF-New Features.
  - Click **Documentation** to view the documented test cases, which are part of this NEF release.
  - Click the blue dots inside **Build History** box to view the success console logs of the "Sanity", "All-NewFeatures" respectively.
  - The **Stage View** represents the already deployed pipeline for the customer reference.
2. Click **Configure**. User must wait for the page to load completely. Once the page loads completely, click the **Pipeline** tab:

#### Note

Make sure that the following page loads completely before you perform any action on it. Also, do not modify any configuration other than shown below.

Figure 4-18 Pipeline Tab

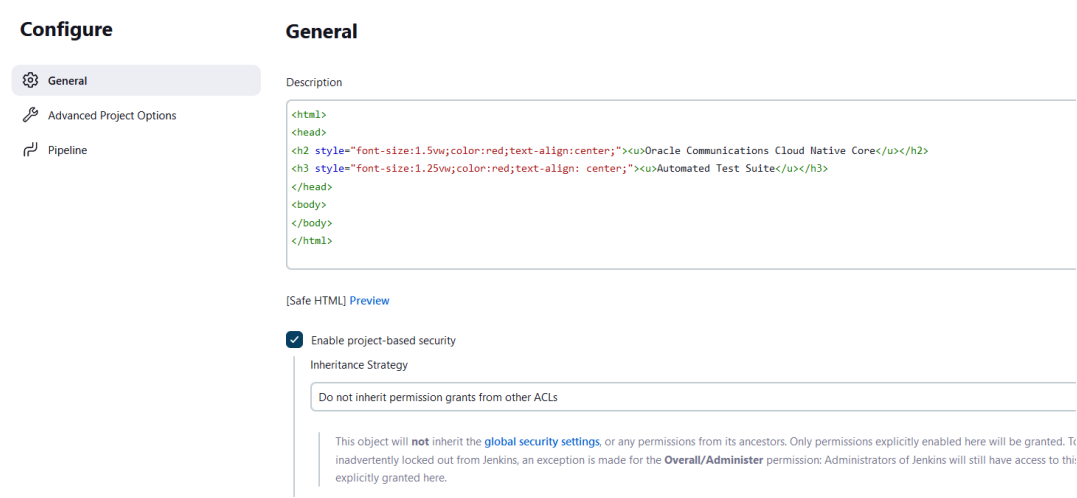

The **Pipeline** section of the configuration page appears as follows:  
The content of the pipeline script is as follows:



Figure 4-19 Pipeline Script

```

1 node ('built-in'){
2   //a = SELECTED_NF b = NEF_Namespace c = ingress_gateway_svc d = ingress_gateway_port
3   //e = prometheus_ip f = prometheus_port g = nef_name h = RERUN_COUNT
4   //i = AF_SIM_NAME j = AF_SIM_PORT k = AF_SIM_SVC
5   //l = UDR_SIM_NAME m = UDR_SIM_PORT n = UDR_SIM_SVC o = fivegc_ingress_gateway_svc p = fivegc_ingress_gateway_port
6   //q = gmlc_SIM_NAME r = gmlc_port s = gmlc_SIM_SVC t = capif_ingressgw_svc u = capif_ingressgw_port v = EventMgr_capif_SVC
7   //w = qos_svc x = pcf_sim_name y = pcf_port z = pcf_svc A = ME_SVC B = fivegcagent_SVC C = API_MGR_SVC D = AF_MGR_SVC
8   //E = TL_SVC F = Diam_Gw_name G = Diam_Gw_port H = Diam_Gw_sim_svc I = Diam_Gw_svc J = DT_svc K = CHF_Name L = CHF_Port M = CHF_svc
9   //N = MTSIDNLESS_MO_SMS_SVC O = Cncc_Namespace P = ENABLE_CNCC_UI_INT Q = CNC_IAM_USERNAME R = CNC_Console_USERNAME
10  //S = NF_Dropdown T = CNC_Release_Name U = CNC_Roles V = Sleep_time W = max_entry X = wait_time Y = cncc_json_data_path
11  //Z = capif_Network_ingressgw_svc I = capif_network_ingressgw_port
12
13  withEnv([
14
15  ]){
16
17    sh '''
18    sh /var/lib/jenkins/ocnef_tests/preTestConfig.sh \
19    -a NEF \
20    -b default \
21    -c ocnef-ext-nef-ingress-gateway \
22    -d 80 \
23    -e prometheus.cne-infra \
24    -f 9090 \
25    -g ocnef \
26    -h 0 \
27    -i af1 \
28    -j 1010 \
29    -k ocnefsim-ocstub-svc-af \
30    -l udm1 \
31    -m 1010 \
32    -n ocnefsim-ocstub-svc-udm \
33    -o ocnef-fivegc-ingress-gateway \
34    -p 80 \
35    -q gmlc1 \
36    -r 1010 \
37    -s ocnefsim-ocstub-svc-gmlc \
38    -t occapif-ext-ingress-gateway \
39    -u 80 \
40    -v occapif-eventmgr.default \
41    -w ocnef-qualityofservice.default \
42    -x pcf1 \
43    -y 1010 \
44    -z ocnefsim-ocstub-svc-pcf \
45    -A ocnef-monitoringevents.default \
46    -B ocnef-fivegcagent.default \
47    -C occapif-apimgr.default \
48    -D occapif-afmgr.default \
49    -E ocnef-trafficinfluence.default \
50    -F diamgw1 \
51    -G 1010 \
52    -H ocnefsim-ocstub-diam-svc.default \
53    -I ocnef-oc-diam-gateway.default \
54    -J ocnef-devicetrigger.default \
55    -K chf1 \
56    -L 1010 \
57    -M ocnefsim-ocstub-svc-chf.default \
58    -N ocnef-msisdnllessmosms.default \
59    -O CNCC \
60    -P yes \
61    -Q admin \
62    -R nefuser \
63    -S Cluster1.NEF.nef \
64    -T 24.1.0-beta.43 \
65    -U ADMIN \
66    -V 2 \
67    -W 5 \
68    -X 150 \
69    -Y /var/lib/jenkins/ocnef_tests/data/cncc \
70    -Z occapif-network-ingressgateway \
71    -1 80 \
72    ...

```

**Note**

As required by the setup details, the user can change any value except **line number 18**.

You can change the parameter values from "**a**" - to - "**z**", "**A**" - to - "**Z**", and "**1**" as per user requirement. The parameter details are available as comments from line number **2** - to - **11**.

- **a:** Name of the NF to be tested in capital (NEF).
- **b:** Namespace in which the NEF is deployed.
- **c:** endPointIP (NEF ingress gateway service )value used while deploying NEF with the help of helm chart.
- **d:** endPointPort (NEF ingress gateway port) value used while deploying NEF with the help of helm chart.

- **e:** Name\_of\_Prometheus\_service.namespace (ocnef-prometheus-server.ocnef-infra).
- **f:** Port of Prometheus service (80).
- **g:** Helm\_release\_name used to deploy NEF (ocnef).
- **h:** Number of times the re-run of failed case is allowed (default as 2).
- **i:** AF Simulator Name used to install simulator (Af1)
- **j:** AF Simulator Port(1010).
- **k:** AF Simulator service used to install.
- **l:** UDM Simulator Name used to install simulator (udm1)
- **m:** UDM Simulator Port(1010).
- **n:** UDM Simulator service used to install.
- **o:** fivegc endPointIP (NEF fivegc ingress gateway service )value used while deploying NEF with the help of helm chart.
- **p:** five gc endPointPort (NEF fivegc ingress gateway port) value used while deploying NEF with the help of helm chart.
- **q:** GMLC Simulator Name used to install simulator (udm1)
- **r:** GMLC Simulator Port(1010).
- **s:** GMLC Simulator service used to install.
- **t:** OCCAPIF External Gateway
- **u:** endPointPort (OCCAPIF ingress gateway port) value used while deploying occapif with the help of helm chart.
- **v:** OCCAPIF Event manager service
- **w:** QoS service
- **x:** PCF simulator
- **y:**PCF simulator port
- **z:** PCF Simulator service used to install.
- **A:** OCNEF ME Service
- **B:** OCNEF FiveGCAgent Service
- **C:** OCCAPIF API Manager service
- **D:** OCCAPIF AF Manager service
- **E:** OCNEF Traffic Influence service
- **F:** Diameter Gateway name
- **G:** Diameter Gateway port number
- **H:** Diameter Gateway Simulator service
- **I:** Diameter Gateway service
- **J:** Device Trigger service
- **K:** Charging Function Name
- **L:** Charging Function SIM Port
- **M:** Charging Function SIM service
- **N:** MSISDNLess MO SMS service


- **O:** CNC Console Namespace
- **P:** Enable CNC Console UI
- **Q:** CNC User name
- **R:** CNC Console User
- **S:** NF Dropdown
- **T:** CNC Release version
- **U:** CNC Roles
- **V:** Sleep Time
- **W:** Maximum Entry
- **X:** Wait Time
- **Y:** CNCC JSON Data Path
- **Z:** CAPIF Network Ingress Gateway service
- **1:** CAPIF Network Ingress Gateway Port

#### Note

- If user is using OCCNE1.6/OSO-1.6.1 or earlier, change the Prometheus service URI (-n) to "/api/" and Prometheus service name and port to appropriate values. For OCCNE 1.7.0/OSO 1.6.2 or later, retain the default value **"/prometheus/api/"**
- When CNC functionalities are required to be used, enable CNC Console by setting the CNC Console UI to "Yes".

3. Click **Save** after making necessary changes. The NEF-NewFeatures screen appears. Click the **Build with Parameters** link available in the left navigation pane of the **NEF-NewFeatures** Pipeline screen. The following screen appears.

**Figure 4-20 Pipeline NEF\_NewFeatures**

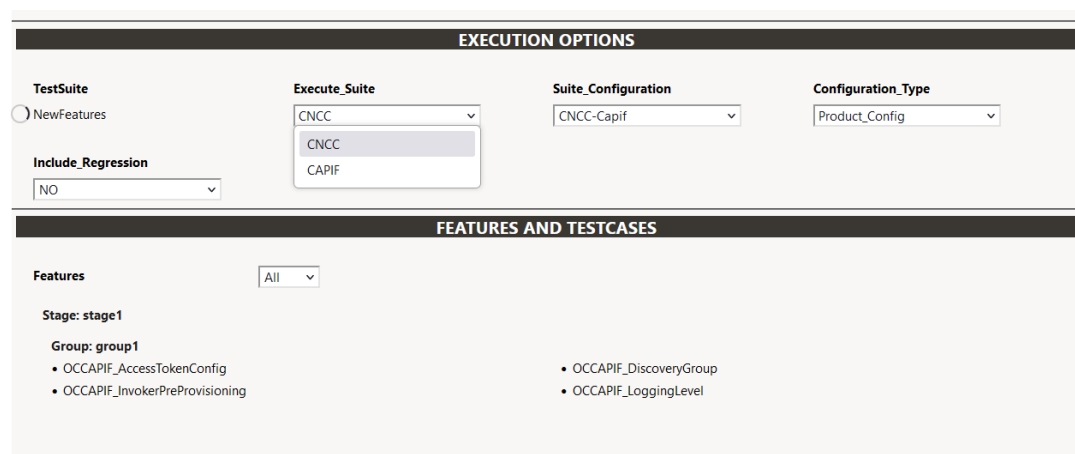

| EXECUTION OPTIONS                 |               |                     |                    |
|-----------------------------------|---------------|---------------------|--------------------|
| TestSuite                         | Execute_Suite | Suite_Configuration | Configuration_Type |
| <input type="radio"/> NewFeatures | CNCC          | CNCC-Capif          | Product_Config     |
| Include_Regression                |               |                     |                    |
| NO                                |               |                     |                    |

| FEATURES AND TESTCASES                                                                                              |                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Features                                                                                                            | All                                                                                                    |
| Stage: stage1                                                                                                       |                                                                                                        |
| Group: group1                                                                                                       |                                                                                                        |
| <ul style="list-style-type: none"> <li>OCCAPIF_AccessTokenConfig</li> <li>OCCAPIF_InvokerPreProvisioning</li> </ul> | <ul style="list-style-type: none"> <li>OCCAPIF_DiscoveryGroup</li> <li>OCCAPIF_LoggingLevel</li> </ul> |

4. Select an option from the **Execute\_Suite** section:

**Note**

Based on the option selected in this section, the values under **Suite\_Configuration** sections get populated.

5. Select the applicable configuration under the **Suite\_Configuration** section based on the selected value for **Execute\_Suite** and the custom configuration file used for NEF deployment for ATS. For more information about the NEF `custom_values.yaml` files for ATS, see "Download NEF Package" in the *Oracle Communications Cloud Native Core, Network Exposure Function Installation, Upgrade, and Fault Recovery Guide*.

**Important**

Ensure that the ATS configurations match with the `custom_values.yaml` file used for NEF deployment. A mismatch between the NEF for ATS deployment configurations and the selected Suite configurations results in build failure.

The following table describes the mapping between the options selected for **Execute\_Suite** and **Suite\_Configuration** and the respective feature test cases that can be run:

**Table 4-4 Execution Suite Configuration Mapping**

| Execute_Suite | Suite_Configuration | Supported NEF Custom yaml file     | Features                                                                                                   |
|---------------|---------------------|------------------------------------|------------------------------------------------------------------------------------------------------------|
| CNCC          | CNCC-Capif          | oc-nef-custom-values-ats-cncc.yaml | OCCAPIF_AccessTokenConfig<br>OCCAPIF_DiscoveryGroup<br>OCCAPIF_InvokerProvisioning<br>OCCAPIF_LoggingLevel |
| CAPIF         | CAPIF-API           | oc-capif-custom-values-ats.yaml    | OCNEF_CAPIF_Discovery_Group_Wrapper_Api                                                                    |

6. Select any of following valid values from **Configuration\_Type**:
  - **Product\_Config**: On selecting this option, test cases from product folders are populated on ATS UI and product configuration is applied to them via the key-value pair and yaml files defined or present in the "Product Config" folder.
  - **Custom\_Config**: On selecting this option, test cases from custom folders are populated on ATS UI and custom configuration is applied to them via the key-value pair and yaml files defined or present in the "Custom Config" folder.
7. Select any of the following options under the **Select\_Option** section:
  - **All**: This is the default option. It runs all the NEF test cases. Scroll down and click **Build** to execute all the test cases.
  - **Single/MultipleFeatures**: This option allows you to select any number of test cases that you want to run from the list of total test cases available for execution.
8. After selecting the test cases, click **Build** and select **Console Output** to view the test results. The following is a sample test result output:

**Figure 4-21 Sample Test Cases Result - New Feature**

```

3 features passed, 0 failed, 0 skipped
14 scenarios passed, 0 failed, 0 skipped
386 steps passed, 0 failed, 0 skipped, 0 undefined
Took 0m17.286s
+ set +x
[Pipeline] fileExists
[Pipeline] echo
File /var/lib/jenkins/ocnef_tests/features/cust_newfeatures/TI_BSF/stage1/group1/rerun-failing.features does not exist!
[Pipeline] sh (Stage: stage1 Group: group1 Report)
+ set +x
stage1 group1
Final Result:-
Total-Features RUN 3, PASS 3, FAIL 0

The report displayed here is same as the one displayed at the end of group execution
[Pipeline] echo
The below are the consolidated output of all the features that are run
[Pipeline] sh (Stage: stage1 Group: group1 Result)
+ set +x
*****Stage: stage1 Group: group1 Result*****
stage1 group1
Final Result:-
Total-Features RUN 3, PASS 3, FAIL 0

[Pipeline] sh (Overall Result)
+ set +x
*****Overall Result*****

```

**Note**

For more details on consolidated test report, see [Managing Final Summary Report, Build Color, and Application Log](#).

**Extracting Application Logs**

If any scenarios fail after running the pipeline job, perform the following steps:

1. Log in to the ATS pod:

```
kubectl exec -it pod/ocats-nef-6f6dfc76b5-jbgzt -n ocnef bash
```

2. Go to Jenkins build directory:

```
cd /var/lib/jenkins/.jenkins/jobs/NEF_NewFeatures/builds/2
```

For example:

```
cd $JENKINS_HOME/jobs/$JOB_NAME/builds/$BUILD_NUMBER/
```

3. Extract the applogs.zip file:

```
unzip applogs.zip
```

4. After successfully unzipping the file, open the applog folder to view the pod logs for failed scenarios:

```
(env) [jenkins@ocats-nef-6f6dfc76b5-jbgzt applog]$ pwd
/var/lib/jenkins/.jenkins/jobs/NEF_NewFeatures/builds/2/applog
(env) [jenkins@ocats-nef-6f6dfc76b5-jbgzt applog]$ ls -ltrh
total 760K
-rw-r--r--. 1 jenkins jenkins 250K Nov 19 11:08 ME_Subscription_case.log
-rw-r--r--. 1 jenkins jenkins 249K Nov 19 11:08 1st_Rerun-
ME_Subscription_case.log
-rw-r--r--. 1 jenkins jenkins 255K Nov 19 11:09 2nd_Rerun-
ME_Subscription_case.log
```

### Running NEF Test Cases

The following feature is added for the release 24.2.0:

- CAPIF Integration with the CNC Console
- Wrapper APIs to Support CAPIF Functionality in CNC Console

For running this release feature, see [NEF-NewFeatures Pipeline](#). For running the previous release features, see [NEF-Regression Pipeline](#).

## 4.2.4 NEF-NewFeatures Documentation

To view NEF test cases, go to **NEF-NewFeatures** pipeline and click the **Documentation** link in the left navigation pane. The following feature is added for the release 24.2.0:

- CAPIF Integration with the CNC Console
- Wrapper APIs to Support CAPIF Functionality in CNC Console

### Test Result Analyzer

Using the Test Result Analyzer plug-in available in ATS, user can view consolidated and detailed reports. For more information, see [Test Results Analyzer](#) section.

### Test Case Mapping to Features and Display Total Counts

With this feature, users can view Total Count of Features, TestCases/Scenarios and TestCase mapping to each Feature of NEF in ATS View. For more information, see [Support for Test Case Mapping and Count](#) section.

## 4.2.5 NEF-Regression Pipeline

This section describes how to run test cases for Network Exposure Function (NEF) Regression pipeline.

The NEF-Regression pipeline is a pre-configured pipeline where all the test cases of previous releases are available. For example, for NEF 24.2.0, this pipeline has all the test cases released till NEF 24.2.x.

To view NEF-Regression pipeline details, perform the following steps:

1. Click **NEF-Regression** in the **Name** column.
2. Click the **Build with Parameters** link available in the left navigation pane of the **NEF-Regression** Pipeline screen.

- Click **Build** and select **Console Output** to view the test results.

### Note

The Regression pipeline does not have any sanity option. However, you must perform all the steps performed in the **NEF-Regression** pipeline. Ensure that the pipeline script is configured according to the environment variables.

## Running Regression Test Cases

To run NEF test cases, perform the following steps:

- Click the **Build with Parameters** link available in the left navigation pane of the **NEF-Regression** Pipeline screen. The following page appears.

Figure 4-22 Pipeline NEF\_Regression

- Select an option from the **Execute\_Suite** section:

### Note

Based on the option selected in this section, the values under **Suite\_Configuration** sections get populated.

- Select the applicable configuration under the **Suite\_Configuration** section based on the selected value for **Execute\_Suite** and the custom configuration file used for NEF deployment for ATS. For more information about the NEF `custom_values.yaml` files for ATS, see "Download NEF Package" in the *Oracle Communications Cloud Native Core, Network Exposure Function Installation, Upgrade, and Fault Recovery Guide*.

### Important

Ensure that the ATS configurations match with the `custom_values.yaml` file used for NEF deployment. A mismatch between the NEF for ATS deployment configurations and the selected Suite configurations results in build failure.

The following table describes the mapping between the options selected for **Execute\_Suite** and **Suite\_Configuration** and the respective feature test cases that can be run:

**Table 4-5 Execution Suite Configuration Mapping**

| Execute_Suite | Suite_Configuration        | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAPIF         | CAPIF-Event Manager        | OCNEF_CAPIF_Event_Mgr<br>OCNEF_CAPIF_Event_Mgr_Creation_Failure<br>OCNEF_CAPIF_Event_Mgr_Duration_Based<br>OCNEF_CAPIF_Event_Mgr_Metrics<br>OCNEF_CAPIF_Event_Mgr_Notification<br>OCNEF_CAPIF_Event_Mgr_Publish<br>OCNEF_CAPIF_Event_Mgr_Unsubscribe<br>OCNEF_CAPIF_Event_Mgr_With_Filters                                                                                                                                                                                                                                                                                                                                                        |
|               | CAPIF-Functionality        | OCNEF_CAPIF_Discovery_Group<br>OCNEF_CAPIF_OAuth<br>OCNEF_CAPIF_On_Off_boarding_Invoker<br>OCNEF_CAPIF_Preprovisioning_Invoker<br>OCNEF_CAPIF_SecurityContext                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| CNCC          | CNCC-NEF                   | OCNEF_Console_Home_Screen_Validation<br>OCNEF_Global_Af_Config<br>OCNEF_Global_Comm_Profile_Mapping<br>OCNEF_Global_ModelID_Profile_Config<br>OCNEF_Global_NC_AfServiceid_Config<br>OCNEF_Global_NC_EcgiMap_Config<br>OCNEF_Global_NC_GeoZoneIdToSpatialValidityMap_Config<br>OCNEF_Global_NC_GlobalRanNodeIdMap_Config<br>OCNEF_Global_NC_GnbidMap_Config<br>OCNEF_Global_NC_NcgiMap_Config<br>OCNEF_Global_NC_PlmnidMap_Config<br>OCNEF_Global_NC_Qosprofile_Config<br>OCNEF_Global_NC_SCS_SME<br>OCNEF_Global_NC_TaiMap_Config<br>OCNEF_Global_System_Configuration<br>OCNEF_Gmlc_Config<br>OCNEF_Logging_Config<br>OCNEF_MenuItems            |
| Nef Model-A   | ME-Location Reporting-GMLC | OCNEF_ME_GMLC_Additional                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Nef Model-B   |                            | OCNEF_ME_GMLC_Deferred_Area_MaxReports_Expiry<br>OCNEF_ME_GMLC_Deferred_Motion_MaxReports_Expiry<br>OCNEF_ME_GMLC_Deferred_Periodic_MaxReports_Expiry<br>OCNEF_ME_GMLC_Deferred_Periodic_error_exceeds_range<br>OCNEF_ME_GMLC_Deferred_report<br>OCNEF_ME_GMLC_Deferred_report_area<br>OCNEF_ME_GMLC_Deferred_report_area_onlyExpiry<br>OCNEF_ME_GMLC_Deferred_report_explicitCancellation_set<br>OCNEF_ME_GMLC_Deferred_report_inside_area<br>OCNEF_ME_GMLC_Deferred_report_leaving_area<br>OCNEF_ME_GMLC_Deferred_report_leaving_area_more_reports<br>OCNEF_ME_GMLC_Deferred_report_motion<br>OCNEF_ME_GMLC_Deferred_report_motion_more_reports |



Table 4-5 (Cont.) Execution Suite Configuration Mapping

| Execute_Suite | Suite_Configuration                     | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Nef Model-D   |                                         | OCNEF_ME_GMLC_Deferred_report_motion_onlyExpiry<br>OCNEF_ME_GMLC_Deferred_report_negative_reports<br>OCNEF_ME_GMLC_Deferred_report_periodic<br>OCNEF_ME_GMLC_Deferred_report_periodic_more_reports<br>OCNEF_ME_GMLC_Deferred_report_periodic_onlyExpiry<br>OCNEF_ME_GMLC_Deferred_report_unknown<br>OCNEF_ME_GMLC_Immediate_report_currOrLastLocation<br>OCNEF_ME_GMLC_Immediate_report_currentLocation<br>OCNEF_ME_GMLC_Immediate_report_initialLocation<br>OCNEF_ME_GMLC_Immediate_report_lastKnownLocation<br>OCNEF_ME_GMLC_Immediate_report_unknown_monitorType<br>OCNEF_ME_GMLC_LocQos_Absent_destIfLocQosAbsent_gmlc<br>OCNEF_ME_GMLC_Notification_EnteringIntoArea_sendLocationInfo_false<br>OCNEF_ME_GMLC_Notification_EnteringIntoArea_sendLocationInfo_false_expiry<br>OCNEF_ME_GMLC_Notification_Motion_sendLocationInfo_false<br>OCNEF_ME_GMLC_Notification_Motion_sendLocationInfo_false_expiry<br>OCNEF_ME_GMLC_Notification_Periodic_sendLocationInfo_false<br>OCNEF_ME_GMLC_Notification_Periodic_sendLocationInfo_false_explicitCancel_false<br>OCNEF_ME_GMLC_Notification_Periodic_sendLocationInfo_false_explicitCancel_true<br>OCNEF_ME_GMLC_Notification_sendLocationInfo_set<br>OCNEF_ME_GMLC_PUT<br>OCNEF_ME_GMLC_Reports_Errors<br>OCNEF_ME_MODEL_D_gmlc_enabled |
| Nef Model-A   | ME-Location Reporting-UDM               | OCNEF_EFC_ME_AF_Unavailable<br>OCNEF_EFC_ME_Errors_Scenarios<br>OCNEF_EFC_ME_MultipleNotifications<br>OCNEF_EFC_ME_OneTimeNotification<br>OCNEF_GET_ME<br>OCNEF_GET_ME_Scenarios<br>OCNEF_ME_LocationReport_PUT<br>OCNEF_ME_Sub_UnSub                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Nef Model-B   |                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Nef Model-D   |                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Nef Model-A   | ME-Location Reporting-GMLC-Failover-UDM | OCNEF_ME_GMLC_Not_Available_switchToUdmOnFailure_set<br>OCNEF_ME_MODEL_D_gmlc_enabled                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Nef Model-B   |                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Nef Model-D   |                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Nef Model-A   | AsQos+CHF_PCF                           | OCNEF_Additional_Qos<br>OCNEF_CHF_QOS_Create<br>OCNEF_CHF_QOS_Delete<br>OCNEF_CHF_QOS_Metrics<br>OCNEF_CHF_QOS_Notification<br>OCNEF_CHF_QOS_Update<br>OCNEF_Qos_Create_Subscription<br>OCNEF_Qos_Delete_Subscription<br>OCNEF_Qos_Get_Subscription<br>OCNEF_Qos_Metrics<br>OCNEF_Qos_Notification<br>OCNEF_Qos_Update_with_PUT_PATCH                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Nef Model-B   |                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Nef Model-D   |                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Nef Model-A   | AsQos+CHF_BSF                           | OCNEF_Additional_Qos<br>OCNEF_CHF_QOS_Create<br>OCNEF_CHF_QOS_Delete<br>OCNEF_CHF_QOS_Metrics<br>OCNEF_CHF_QOS_Notification<br>OCNEF_CHF_QOS_Update<br>OCNEF_Qos_Create_Subscription                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Nef Model-B   |                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Table 4-5 (Cont.) Execution Suite Configuration Mapping

| Execute_Suite | Suite_Configuration       | Features                                                                                                                                                                                                                                                                                                                  |
|---------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Nef Model-D   |                           | OCNEF_Qos_Delete_Subscription<br>OCNEF_Qos_Get_Subscription<br>OCNEF_Qos_Metrics<br>OCNEF_Qos_Notification<br>OCNEF_Qos_Update_with_PUT_PATCH                                                                                                                                                                             |
| Nef Model-A   | TI_PCF                    | OCNEF_TI_Create_Subscription                                                                                                                                                                                                                                                                                              |
| Nef Model-B   |                           | OCNEF_TI_Delete_Subscription                                                                                                                                                                                                                                                                                              |
| Nef Model-D   |                           | OCNEF_TI_Get_Subscription<br>OCNEF_TI_Notification<br>OCNEF_TI_Update_with_PUT_PATCH                                                                                                                                                                                                                                      |
| Nef Model-A   | TI_BSF                    | OCNEF_TI_Create_Subscription                                                                                                                                                                                                                                                                                              |
| Nef Model-B   |                           | OCNEF_TI_Delete_Subscription                                                                                                                                                                                                                                                                                              |
| Nef Model-D   |                           | OCNEF_TI_Get_Subscription                                                                                                                                                                                                                                                                                                 |
| Nef Model-A   | TI_UDR                    | OCNEF_TI_Create_Subscription                                                                                                                                                                                                                                                                                              |
| Nef Model-B   |                           | OCNEF_TI_Get_Subscription                                                                                                                                                                                                                                                                                                 |
| Nef Model-D   |                           | OCNEF_TI_Metrics<br>OCNEF_TI_Update_with_PUT_PATCH                                                                                                                                                                                                                                                                        |
| Nef Model-A   | ME - SCEF+NEF             | OCNEF_SCEF_EPC_Notification                                                                                                                                                                                                                                                                                               |
| Nef Model-B   |                           | OCNEF_SCEF_NEF_GET_ME                                                                                                                                                                                                                                                                                                     |
| Nef Model-D   |                           | OCNEF_SCEF_NEF_GET_ME_Scenarios<br>OCNEF_SCEF_NEF_ME_AF_Unavailable<br>OCNEF_SCEF_NEF_ME_Errors_Scenarios<br>OCNEF_SCEF_NEF_ME_MultipleNotifications<br>OCNEF_SCEF_NEF_ME_OneTimeNotification<br>OCNEF_SCEF_NEF_ME_Sub_UnSub                                                                                              |
| Nef Model-A   | ME - PDU Session          | OCNEF_ME_PDU_Notification                                                                                                                                                                                                                                                                                                 |
| Nef Model-B   |                           | OCNEF_ME_PDU_PUT                                                                                                                                                                                                                                                                                                          |
| Nef Model-D   |                           | OCNEF_ME_PDU_SUBSCRIPTION                                                                                                                                                                                                                                                                                                 |
| Nef Model-A   | ME - Loss of Connectivity | OCNEF_ME_LossOfCon                                                                                                                                                                                                                                                                                                        |
| Nef Model-B   |                           | OCNEF_ME_LossOfCon_PUT                                                                                                                                                                                                                                                                                                    |
| Nef Model-D   |                           | OCNEF_ME_LossOfConn_MultipleNotifications<br>OCNEF_ME_LossOfConn_OneTimeNotification                                                                                                                                                                                                                                      |
| Nef Model-A   | ME - UeReachability       | OCNEF_ME_UE_REACHABILITY_MultipleNotifications                                                                                                                                                                                                                                                                            |
| Nef Model-B   |                           | OCNEF_ME_UE_REACHABILITY_OneTimeNotification                                                                                                                                                                                                                                                                              |
| Nef Model-D   |                           | OCNEF_ME_UE_Reachability<br>OCNEF_ME_UE_Reachability_PUT                                                                                                                                                                                                                                                                  |
| Nef Model-A   | Qos+CHF - SCEF+NEF        | OCNEF_CHF_SCEF_Qos_Create_Subscription                                                                                                                                                                                                                                                                                    |
| Nef Model-B   |                           | OCNEF_CHF_SCEF_Qos_Delete_Subscription                                                                                                                                                                                                                                                                                    |
| Nef Model-D   |                           | OCNEF_CHF_SCEF_Qos_Metrics<br>OCNEF_CHF_SCEF_Qos_Notification<br>OCNEF_CHF_SCEF_Qos_Update_with_PUT_PATCH<br>OCNEF_SCEF_Qos_Create_Subscription<br>OCNEF_SCEF_Qos_Delete_Subscription<br>OCNEF_SCEF_Qos_Get_Subscription<br>OCNEF_SCEF_Qos_Metrics<br>OCNEF_SCEF_Qos_Notification<br>OCNEF_SCEF_Qos_Update_with_PUT_PATCH |
| Nef Model-A   | Device Trigger            | Ocnf_DT_Notification                                                                                                                                                                                                                                                                                                      |
| Nef Model-B   |                           | Ocnf_DT_Sub_Unsub                                                                                                                                                                                                                                                                                                         |
| Nef Model-D   |                           |                                                                                                                                                                                                                                                                                                                           |
| Nef Model-A   | Msisdnless-MO-SMS         | Ocnf_MO-Sms_Notification                                                                                                                                                                                                                                                                                                  |
| Nef Model-B   |                           |                                                                                                                                                                                                                                                                                                                           |
| Nef Model-D   |                           |                                                                                                                                                                                                                                                                                                                           |

4. Select any of following valid values from **Configuration\_Type**:
  - **Product\_Config**: On selecting this option, test cases from product folders are populated on ATS UI and product configuration is applied to them via the key-value pair and yaml files defined or present in the "Product Config" folder.
  - **Custom\_Config**: On selecting this option, test cases from custom folders are populated on ATS UI and custom configuration is applied to them via the key-value pair and yaml files defined or present in the "Custom Config" folder.
5. Select any of the following options under the **Select\_Option** section:
  - **All**: This is the default option. It runs all the NEF test cases. Scroll down and click **Build** to execute all the test cases.
  - **Single/MultipleFeatures**: This option allows you to select any number of test cases that you want to run from the list of total test cases available for execution.
6. After selecting the test cases, click **Build** and select **Console Output** to view the test results. The following is a sample test result output:

**Figure 4-23 Sample Test Cases Result - All-Regression**

```

9 features passed, 0 failed, 0 skipped
53 scenarios passed, 0 failed, 0 skipped
1456 steps passed, 0 failed, 0 skipped, 0 undefined
Took 0m42.237s
[Pipeline] sh
+ cd /var/lib/jenkins/ocnef_tests
++ cat /var/lib/jenkins/ocnef_tests/envIRON.sh
++ grep RERUN
++ cut -d= -f2
++ cut '-d;' -f1
+ rerun=0
+ export nef_data_path=/var/lib/jenkins/ocnef_tests/data/
+ nef_data_path=/var/lib/jenkins/ocnef_tests/data/
+ sh re-run.sh 0
1
Scenario passed
[Pipeline] sh
+ cd /var/lib/jenkins/ocnef_tests
++ cat /var/lib/jenkins/ocnef_tests/envIRON.sh
++ grep RERUN
++ cut -d= -f2
++ cut '-d;' -f1
+ rerun=0
+ export nef_data_path=/var/lib/jenkins/ocnef_tests/data/
+ nef_data_path=/var/lib/jenkins/ocnef_tests/data/
+ sh report.sh 0 file_name=outputresult
Final Result:-
Total-Features RUN 9, PASS 9, FAIL 0

```

#### ① Note

For more details on consolidated test report, see [Managing Final Summary Report, Build Color, and Application Log](#).

## 4.2.6 NEF-Regression Documentation

This section describes the documentation for NEF-Regression pipeline.

To view the documentation for any of the NEF features, click **NEF-Regression** on the ATS home page. Then, click **Documentation** in the left navigation pane.

This page shows features of only those test cases that are released in previous releases.

The NEF-Regression test cases are divided into multiple groups based on the functionality.

- ME Location Reporting-GMLC
- ME Location Reporting-UDM
- ME Location Reporting-GMLC-Failover-UDM
- AsQos+CHF\_PCF
- AsQos+CHF\_BSF
- TI\_PCF
- TI\_BSF
- TI\_UDR
- ME - SCEF+NEF
- ME - PDU Session
- ME - Loss of Connectivity
- ME - UeReachability
- Qos+CHF - SCEF+NEF
- Device Trigger
- Msisdnless-MO-SMS

## 4.3 Running NRF Test Cases using ATS

This section describes how to run NRF test cases using ATS. It includes:

- [Prerequisites](#)
- [Logging into ATS](#)
- [NRF-NewFeatures Pipeline](#)
- [NRF-NewFeatures Documentation](#)
- [NRF-Regression Pipeline](#)
- [NRF-Regression Documentation](#)

### 4.3.1 Prerequisites

To run NRF test cases using NRF ATS 24.2.x, you need to ensure that following prerequisites are fulfilled.

- For running three-site georedundancy test cases, NRF 24.2.x should be deployed on three sites with DB replication enabled. Georedundancy feature **must** be enabled on all the NRF sites before running these test cases.
- For running two-site georedundancy test cases, NRF 24.2.x should be deployed on two sites with DB replication enabled. These test cases are executed separately as it requires two different NRFs. These can be executed on a three-site georedundancy setup as well. Georedundancy feature **must** be enabled on all the NRF sites before running these test cases.

- All the ATS pipelines other than georedundancy, three-site georedundancy, and NRF Growth must be executed with only one NRF deployment (standalone NRF).
- The following NRF database tables should not have any entries:
  - nrfApplicationDB.NfInstances
  - nrfApplicationDB.NfStatusMonitor
  - nrfApplicationDB.NfSubscriptions
- NRF/s should be deployed with the default helm and REST configurations, other than ocnrfHost and ocnrfPort.
- To run NF-FQDN-Authentication-Feature test cases, deploy NRF and NRF ATS, both with NF Authentication feature changes.
- All microservices of NRF must be up and running including **Alternate route** and **Artisan** microservice.
- For running Alerts test cases, configure NRF Alerts on the AlertManager on the Prometheus Server. For more details on configuring alerts, see *Oracle Communications Cloud Native Core, Network Repository Function Installation, Upgrade, and Fault Recovery Guide*.
- Before deploying NRF, user should create RSA and ECDSA certificates and keys (public and private) for AccessToken microservice.
- Deploy NRF 24.2.x with default helm configurations using helm charts to run all test cases except **NF-FQDN-Authentication-Feature** cases.
- Ensure all microservices of NRF should be up and running including Accesstoken microservice. A key with RSA and another with ECDSA algorithm is mandatory.
- Copy the public keys (RSA and ECDSA) to the ATS pod at the `/var/lib/jenkins/ocnrf_tests/public_keys` location, with the names `ec_public.pem` and `rs_public.pem` respectively for ECDSA and RSA public keys. Create a copy of `rs_public.pem` and save it as `new_public.pem` in the same location.
- Create JSON files for key and certificate details and copy them to ATS at `/var/lib/jenkins/ocnrf_tests/` location. Refer to [KID feature specific Prerequisite](#).
- Deploy ATS using helm charts.
- For NRF 24.2.x, deploy five stub servers for running Roaming, SLF, Forwarding, and SLF via SCP functionality test cases. The service name for the stub servers must be **notify-stub-service**, **notify-stub-service02**, **notify-stub-service03**, **amf1-cluster1-net2-amf-5gc-mnc016-mcc310-3gppnetwork-org**, and **slf-stub-service01**.
- The **slf-stub-service01** stub must be deployed with **service port as 80**. For more information, see [Installing ATS for NRF](#).
- Replace the existing content with the following content in the alternate-route section of the `ocnrf_custom_values.yaml` file:  
The following configuration changes are required to accommodate alternate routing test cases based on the latest configuration.

```
staticVirtualFqdns:
  - name: https://abc.test.com
    alternateFqdns:
      - target: notify-stub-service03
        port: 8080
        priority: 10
      - target: notify-stub-service03
```

```

        port: 8080
        priority: 20
    - name: http://xyz.test.com
      alternateFqdns:
        - target: notify-stub-service03
          port: 8080
          priority: 10
        - target: notify-stub-service03
          port: 8080
          priority: 20

```

```
dnsSrvEnabled: false
```

- Ensure Prometheus service is up and running.
- Deploy ATS and Stubs in the same namespace as NRF, as default ATS deployment is with role binding. In addition, deploy test stubs in the same namespace as NRF.
- User must not initiate a job in two different pipelines at the same time.
- User must not abort a running job, this may lead to data corruption in database.
- For getting PVC support to retain NRF ATS environment variables and pipeline console histories, follow the [installation step](#). By default PVC support is disabled.
- If installation is done with Service mesh, the NRF must be deployed with below annotation in **IbDeployments** and **nonIbDeployments** section:

```

oracle.com/cnc: "true"
traffic.sidecar.istio.io/excludeInboundPorts: "9090,8095,8096,7,53"
traffic.sidecar.istio.io/excludeOutboundPorts: "9090,8095,8096,7,53"

```

where, first one is for connecting to Operations Services Overlay (OSO) for Alerts test cases. Second one is for connecting to ATS for fetching the metrics from pods.

- If Service Mesh is enabled, then create a destination rule to fetch the metrics from the Prometheus. In most of the deployments, Prometheus is kept outside the service mesh and a destination rule is required to communicate between TLS enabled entity (ATS) and non-TLS enabled entity (Prometheus).  
To create a rule:

```

kubectl apply -f - <<EOF
apiVersion: networking.istio.io/v1alpha3
kind: DestinationRule
metadata:
  name: prometheus-dr
  namespace: ocnrf
spec:
  host: oso-prometheus-server.ocnrf.svc.cluster.local
  trafficPolicy:
    tls:
      mode: DISABLE
EOF

```

In the above rule,

- **name** indicates the name of destination rule.
- **namespace** indicates where the ATS is deployed.

- **host** indicates the hostname of the Prometheus server.
- In case of NRF is deployed with network policy enabled, then before NRF-ATS execution a new network policy must be created to access NRF-ATS Jenkins GUI. Following is the sample:
 

```
kubectl apply -f nodePort.yaml -n ocnrf
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: allow-from-node-port
spec:
  podSelector:
    matchLabels:
      app: ocats-nrf
  policyTypes:
  - Ingress
  ingress:
  - ports:
    - protocol: TCP
      port: 8080
```
- To run with CNE HA Prometheus, update the **prom\_type** value in product\_config/global.yaml and custom\_config/global.yaml file to "**cne**".

### Custom Folder Implementation

ATS provides custom test case folders (cust\_newfeatures, cust\_regression, and cust\_performance) using which you can add new test cases, remove unwanted test cases, and modify existing test cases. It does not impact the original product packaged test cases available in the newfeatures, regression and performance folders. For more details, refer to [Custom Folder Implementation](#).

Apart from cust\_newfeatures and cust\_regression, NRF ATS has cust\_FQDNauthentication, cust\_GeoRedundancy, and cust\_3SiteGeo directories that contains test cases related to NF-FQDN and georedundancy respectively.

### Key Identifier (KID) feature specific Prerequisite

User should create the following files with exact names and update the file content as per the naming convention used for keys and certificate along with secret name and namespace. The file names are:

- set\_keyDetailsList.json
- set\_currenKeyId.json
- tokenSigningDetails.json

### Sample Files

```
$ cat set_keyDetailsList.json
{
  "tokenSigningDetails": {
    "defaultK8SecretDetails": {
      "k8SecretNameSpace": "ocnrf",
      "k8SecretName": "ocnrffacesstoken-secret"
    },
    "keyDetailsList": [{
```

```

        "keyID": "EcdsaKid",
        "algorithm": "ES256",
        "privateKey": {
            "k8SecretName": "ocnrfaccesstoken-
secret",
            "k8SecretNameSpace": "ocnrf",
            "fileName": "ecdsa_private_key.pem"
        },
        "certificate": {
            "k8SecretName": "ocnrfaccesstoken-
secret",
            "k8SecretNameSpace": "ocnrf",
            "fileName": "ecdsa_certificate.crt"
        }
    },
    {
        "keyID": "RsaKid",
        "algorithm": "RS256",
        "privateKey": {
            "k8SecretName": "ocnrfaccesstoken-
secret",
            "k8SecretNameSpace": "ocnrf",
            "fileName": "rsa_private_key.pem"
        },
        "certificate": {
            "k8SecretName": "ocnrfaccesstoken-
secret",
            "k8SecretNameSpace": "ocnrf",
            "fileName": "rsa_certificate.crt"
        }
    },
    {
        "keyID": "newKey",
        "algorithm": "RS256",
        "privateKey": {
            "k8SecretName": "ocnrfaccesstoken-
secret",
            "k8SecretNameSpace": "ocnrf",
            "fileName": "rsa_private_key.pem"
        },
        "certificate": {
            "k8SecretName": "ocnrfaccesstoken-
secret",
            "k8SecretNameSpace": "ocnrf",
            "fileName": "rsa_certificate.crt"
        }
    }
}
]
}

```



**Note**

Update the following parameters in the above files:

- k8SecretName
- k8SecretNameSpace
- fileName (name of the private keys and corresponding certificates)

For more information about parameter values, see *Oracle Communications Cloud Native Core, Network Repository Function Installation, Upgrade, and Fault Recovery Guide*.

After updating the files, copy them under the `/var/lib/jenkins/ocnrf_tests/` directory.

```
$ cat set_currentKeyId.json
{
    "tokenSigningDetails":
        {"currentKeyId": "EcdsaKid"
    }
}
```

**Note**

User need not update the currentKeyId name (for example: EcdsaKid), if the same file name as in keyID is used while configuring the set\_currentKeyId.json file.

```
$ cat tokenSigningDetails.json
{
    "presentCurrentKey" : {
        "algorithm" : "ES256",
        "privateKey" : {
            "k8sSecretName" : "ocnrfacesstoken-secret",
            "fileName" : "ecdsa_private_key.pem"
        },
        "certificate" : {
            "k8sSecretName" : "ocnrfacesstoken-secret",
            "fileName" : "ecdsa_certificate.crt"
        }
    },
    "newCurrentKey" : {
        "algorithm" : "RS256",
        "privateKey" : {
            "k8sSecretName" : "ocnrfacesstoken-secret",
            "fileName" : "rsa_private_key.pem"
        },
        "certificate" : {
            "k8sSecretName" : "ocnrfacesstoken-secret",
            "fileName" : "rsa_certificate.crt"
        }
    }
}
```

```
}  
}  
  
$ cat set_currentKeyId.json  
{  
  "tokenSigningDetails":  
    {"currentKeyId": "EcdsaKid"  
    }  
}
```

**Note**

User doesn't want to update the name of the key if the same name was used while configuring.

```
$ cat tokenSigningDetails.json  
{  
  "presentCurrentKey" : {  
    "algorithm" : "ES256",  
    "privateKey" : {  
      "k8sSecretName" : "ocnrfacesstoken-secret",  
      "fileName" : "ecdsa_private_key.pem"  
    },  
    "certificate" : {  
      "k8sSecretName" : "ocnrfacesstoken-secret",  
      "fileName" : "ecdsa_certificate.crt"  
    }  
  },  
  "newCurrentKey" : {  
    "algorithm" : "RS256",  
    "privateKey" : {  
      "k8sSecretName" : "ocnrfacesstoken-secret",  
      "fileName" : "rsa_private_key.pem"  
    },  
    "certificate" : {  
      "k8sSecretName" : "ocnrfacesstoken-secret",  
      "fileName" : "rsa_certificate.crt"  
    }  
  }  
}
```

**Note**

Here, user should update k8SecretName fileName (name of private keys and the corresponding certificates).

**Note**

Update the following parameters in the above code snippet:

- k8SecretName
- fileName (name of the private keys and corresponding certificates)

For more information about parameter values, see *Oracle Communications Cloud Native Core, Network Repository Function Installation, Upgrade, and Fault Recovery Guide*.

After updating all the files, copy them to the ATS pod using "**kubectl cp**" command. Refer to the following sample commands:

```
$ kubectl cp tokenSigningDetails.json ocats-ocats-nrf-58fc5dcbb9-zjsks:/var/lib/jenkins/ocnrf_tests/tokenSigningDetails.json -n ocnrf
$ kubectl cp set_keyDetailsList.json ocats-ocats-nrf-58fc5dcbb9-zjsks:/var/lib/jenkins/ocnrf_tests/set_keyDetailsList.json -n ocnrf
$ kubectl cp set_currentKeyId.json ocats-ocats-nrf-58fc5dcbb9-zjsks:/var/lib/jenkins/ocnrf_tests/set_currentKeyId.json -n ocnrf
$ kubectl cp ec_public.pem ocats-ocats-nrf-58fc5dcbb9-zjsks:/var/lib/jenkins/ocnrf_tests/public_keys/ec_public.pem -n ocnrf
$ kubectl cp rs_public.pem ocats-ocats-nrf-58fc5dcbb9-zjsks:/var/lib/jenkins/ocnrf_tests/public_keys/rs_public.pem -n ocnrf
$ kubectl cp rs_public.pem ocats-ocats-nrf-58fc5dcbb9-zjsks:/var/lib/jenkins/ocnrf_tests/public_keys/new_public.pem -n ocnrf
```

### Prerequisites to Run Testcases for the CCA-Header Feature

To run the pipeline for the CCA-Header feature, NRF must be deployed with the following changes:

1. During installation of NRF, the namespace, secret name and the caroot.cer file name must be provided in NRF's custom values, in ingress-gateway section, as follows:

```
ingress-gateway:
  ccaHeaderValidation:
    k8SecretName: ocingress-secret
    k8Namespace: ocnrf
    fileName: caroot.cer
```

2. In NRF's custom values, metadata.ccaHeaderValidation.enabled should be set to true in the '**accesstoken\_mapping**' object from the ingress-gateway.routesConfig list.

**Note**

If `ccaHeaderValidation` is enabled in NRF, only **CCA-Header** pipeline should be run. The other pipelines (Newfeatures, Regression, 2SiteGeo, 3SiteGeo, or FQDN-Authentication) will not work with the feature enabled.

```
ingress-gateway:
  routesConfig:
    - id: accesstoken_mapping
      uri: http://{ template "accesstoken.service.fullname" . } }:
    {{ template "accesstoken.service.port" . }}
    path: /oauth2/token
    order: 4
    filters:
      controlledShutdownFilter:
        applicableShutdownStates:
          - COMPLETE_SHUTDOWN
    metadata:
      ccaHeaderValidation:
        enabled: true
```

3. Create a secret with the `caroot.cer` file provided in the `ocats_ocnrf_tests_jenkinsjobs_24.2.6.tgz`, using the following command. This same `caroot.cer` file is required to be configured in the secret to execute the CCA-Header cases.

```
kubectl create secret generic <secret name> --from-file=<ca root file name> -n <namespace>
```

For example:

```
kubectl create secret generic ocingress-secret --from-file=caroot.cer -n ocnrf
```

4. Update the secret name from step 3 in `global.yaml` file in either `/var/lib/jenkins/ocnrf_tests/product_config` or `/var/lib/jenkins/ocnrf_tests/custom_config` based on the whether the pipeline will be executed with **Product\_Config** option or **Custom\_Config** option, under the `ccaHeaderSecretName` parameter.

### Prerequisites to Run Testcases for the NRF Growth Features

To run the pipeline for the NRF Growth feature, the following prerequisites have to be done.

1. Install two NRFs that are not georedundant with each other.
2. The pipeline configuration has to be set to the below before running the pipeline. The values of options "u" to "x" have to be set to 0.1.

```
node ('master'){
  //a = SELECTED_NF      b = NF_NAMESPACE      c = FT_ENDPOINT      d =
  GATEWAY_IP            e = GATEWAY_PORT
  //f = CONFIG_IP        g = CONFIG_PORT        h = STUB_IP          i =
  STUB_PORT             j = NFINSTANCEID
  //k = PROMETHEUS_IP    l = PROMETHEUS_PORT    m = RERUN_COUNT      n =
```

```

PROMETHEUS_URI      o = HELM_RELEASE_NAME
//p = MYSQL_HOST      q = PRIVILEGED_USER_SECRET_NAME      r =
DISCOVERY_WAIT_TIME
//s = REPLICATION_STATUS_URI      t = CLUSTER_DOMAIN      u =
REGISTER_WRITE_WAIT_TIME
//v = SUBSCRIPTION_WAIT_TIME      w =
ACCESSTOKEN_WAIT_TIME      x = REGISTER_READ_WAIT_TIME
sh '''
    sh /var/lib/jenkins/ocnrf_tests/preTestConfig.sh \
    -a NRF \
    -b occne-cndbtierone,occne-cndbtiertwo \
    -c ocnrf-ingressgateway.ocnrf.svc.cluster.local:80,ocnrf-1-
ingressgateway.ocnrf.svc.cluster.local:80 \
    -d ocnrf-ingressgateway.occne-cndbtierone,ocnrf-1-
ingressgateway.occne-cndbtiertwo \
    -e 80,80 \
    -f ocnrf-nrfconfiguration.occne-cndbtierone,ocnrf-1-
nrfconfiguration.occne-cndbtiertwo \
    -g 8080,8080 \
    -h notify-stub-service.occne-cndbtierone,notify-stub-
service02.occne-cndbtierone \
    -i 8080,8080 \
    -j 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c,6faf1bbc-6e4a-4454-a507-
a14ef8e1bc5d \
    -k oso-prom-svr.oso \
    -l 80 \
    -m 2 \
    -n /prometheus/api/ \
    -o ocnrf,ocnrf-1 \
    -p mysql-connectivity-service.occne-cndbtierone,mysql-connectivity-
service.occne-cndbtiertwo \
    -q privilegeduser-secret \

    -r 0.5 \
    -s http://ocnrf-ocnrf-app-info:5906/status/category/
replicationstatus,http://ocnrf-1-ocnrf-app-info:5906/status/category/
replicationstatus \
    -t svc.cluster.local \
    -u 0.1 \
    -v 0.1 \
    -w 0.1 \
    -x 0.1
'''
if(env.Include_NewFeatures && "${Include_NewFeatures}" == "YES"){
    sh '''sh /var/lib/jenkins/common_scripts/merge_jenkinsfile.sh'''
    load "/var/lib/jenkins/ocnrf_tests/jenkinsData/Jenkinsfile-Merged"
}
else{
    load "/var/lib/jenkins/ocnrf_tests/jenkinsData/Jenkinsfile-
Regression"
}

}
}

```

## 4.3.2 Logging into ATS

Before logging into ATS, you need to ensure that ATS is deployed successfully using HELM charts as shown below:

### Note

To modify default log in password, refer to [Modifying Login Password](#).

Figure 4-24 Verifying ATS Pod

```
[root@master ~]# kubectl get pods -n ocnrf -owide
```

| NAME                                     | READY | STATUS  | RESTARTS | AGE  | IP              | NODE   | NOMINATED NODE | READINESS GATES |
|------------------------------------------|-------|---------|----------|------|-----------------|--------|----------------|-----------------|
| ocats-ocats-nrf-66f9cc5c64-xxldt         | 2/2   | Running | 0        | 105m | 192.168.140.111 | slave2 | <none>         | <none>          |
| ocnrf-appinfo-8e949e0bdc-1vjsp           | 2/2   | Running | 0        | 105m | 192.168.179.112 | slave5 | <none>         | <none>          |
| ocnrf-egressgateway-6c6bf9b6bf-9pf44     | 2/2   | Running | 0        | 166m | 192.168.179.111 | slave5 | <none>         | <none>          |
| ocnrf-ingressgateway-64574bbb85-w5rxb    | 2/2   | Running | 0        | 166m | 192.168.179.109 | slave5 | <none>         | <none>          |
| ocnrf-nfaccess-token-fb8dc566d-2cjzs     | 3/3   | Running | 0        | 166m | 192.168.140.124 | slave2 | <none>         | <none>          |
| ocnrf-nfdiscovery-bbf8c4c7b-m46cs        | 2/2   | Running | 0        | 166m | 192.168.77.44   | slave3 | <none>         | <none>          |
| ocnrf-nfregistration-6cd3df76dc-8vst8    | 2/2   | Running | 0        | 166m | 192.168.77.30   | slave3 | <none>         | <none>          |
| ocnrf-nfsubscription-76f5c9f4b7-mjq7t    | 2/2   | Running | 0        | 166m | 192.168.140.84  | slave2 | <none>         | <none>          |
| ocnrf-nrf-auditor-74deb9f7fc-2xdp6       | 2/2   | Running | 0        | 166m | 192.168.77.26   | slave3 | <none>         | <none>          |
| ocnrf-nrf-configuration-65fc5fffb-drt45f | 2/2   | Running | 0        | 166m | 192.168.77.46   | slave3 | <none>         | <none>          |
| ocstub-ocstub-python-7c7d4865-flsc8      | 2/2   | Running | 0        | 103m | 192.168.140.112 | slave2 | <none>         | <none>          |
| ocstub1-ocstub-python-7b7cfcdcc4-cng5g   | 2/2   | Running | 0        | 103m | 192.168.179.115 | slave5 | <none>         | <none>          |

```
[root@master ~]# kubectl get svc -n ocnrf
```

| NAME                                | TYPE         | CLUSTER-IP     | EXTERNAL-IP | PORT(S)                      | AGE   |
|-------------------------------------|--------------|----------------|-------------|------------------------------|-------|
| mysql-connectivity-service          | ExternalName | <none>         | <none>      | <none>                       | 3d19h |
| mysql-connectivity-service-headless | ClusterIP    | None           | <none>      | 3306/TCP                     | 3d19h |
| notify-stub-service                 | ClusterIP    | 10.99.89.123   | <none>      | 8080/TCP, 8091/TCP, 8443/TCP | 103m  |
| notify-stub-service02               | ClusterIP    | 10.110.95.204  | <none>      | 8080/TCP, 8091/TCP, 8443/TCP | 103m  |
| ocats-ocats-nrf                     | LoadBalancer | 10.105.39.88   | <pending>   | 8080:30348/TCP               | 107m  |
| ocnrf-egressgateway                 | ClusterIP    | 10.106.98.158  | <none>      | 8080/TCP                     | 166m  |
| ocnrf-ingressgateway                | ClusterIP    | 10.103.128.84  | <none>      | 80/TCP                       | 166m  |
| ocnrf-nfaccess-token                | ClusterIP    | 10.99.116.111  | <none>      | 8080/TCP                     | 166m  |
| ocnrf-nfdiscovery                   | ClusterIP    | 10.97.51.196   | <none>      | 8080/TCP                     | 166m  |
| ocnrf-nfregistration                | ClusterIP    | 10.99.114.145  | <none>      | 8080/TCP                     | 166m  |
| ocnrf-nfsubscription                | ClusterIP    | 10.110.182.193 | <none>      | 8080/TCP                     | 166m  |
| ocnrf-nrf-auditor                   | ClusterIP    | 10.103.17.95   | <none>      | 8080/TCP                     | 166m  |
| ocnrf-nrf-configuration             | ClusterIP    | 10.110.125.184 | <none>      | 8080/TCP                     | 166m  |
| ocnrf-ocnrf-app-info                | ClusterIP    | 10.111.114.179 | <none>      | 5906/TCP                     | 166m  |

```
[root@master ~]# kubectl get nodes -owide
```

| NAME   | STATUS | ROLES  | AGE | VERSION | INTERNAL-IP   | EXTERNAL-IP | OS-IMAGE                | KERNEL-VERSION                | CONTAINER-RUNTIME |
|--------|--------|--------|-----|---------|---------------|-------------|-------------------------|-------------------------------|-------------------|
| master | Ready  | master | 45d | v1.17.1 | 10.75.225.192 | <none>      | Oracle Linux Server 7.5 | 4.1.12-112.16.4.el7uek.x86_64 | docker://19.3.11  |
| slave1 | Ready  | <none> | 45d | v1.17.1 | 10.75.225.43  | <none>      | Oracle Linux Server 7.5 | 4.1.12-112.16.4.el7uek.x86_64 | docker://19.3.11  |
| slave2 | Ready  | <none> | 45d | v1.17.1 | 10.75.225.227 | <none>      | Oracle Linux Server 7.5 | 4.1.12-112.16.4.el7uek.x86_64 | docker://19.3.11  |
| slave3 | Ready  | <none> | 45d | v1.17.1 | 10.75.225.57  | <none>      | Oracle Linux Server 7.5 | 4.1.12-112.16.4.el7uek.x86_64 | docker://19.3.11  |
| slave4 | Ready  | <none> | 45d | v1.17.1 | 10.75.226.104 | <none>      | Oracle Linux Server 7.5 | 4.1.12-112.16.4.el7uek.x86_64 | docker://19.3.11  |
| slave5 | Ready  | <none> | 45d | v1.17.1 | 10.75.225.50  | <none>      | Oracle Linux Server 7.5 | 4.1.12-112.16.4.el7uek.x86_64 | docker://19.3.11  |

```
[root@master ~]#
```

For more information on verifying ATS deployment, see [Verifying ATS Deployment](#).

### Note

In the **Verifying ATS Pod** screen, **slave2** is the node where ATS is deployed, **30348** is the ATS nodeport and **10.75.225.227** is the worker node IP, highlighted in red. For more details on ATS deployment, refer to [Installing ATS for NRF](#).

To log in to ATS, open a browser and provide the IP Address and port details as <Worker-Node-IP>:<Node-Port-of-ATS>. As per above screen, it is **10.75.225.227:30348**.

Figure 4-25   ATS Login

Oracle Communications Cloud Native Core - Automated Test Suite

Welcome to ATS!

Username

Password

☐

Keep me signed in

Sign in

Running ATS

To run ATS:

- 1. Enter the login credentials. Click **Sign in**. The following screen appears.

Figure 4-26   NRF Pre-Configured Pipelines

Dashboard

+ New Item

Build History

Build Queue

No builds in the queue.

Build Executor Status

0/1

Oracle Communications Cloud Native Core

Automated Test Suite

CNCATS NRF : 24.2.6

| S | W | Name ↓          | Last Success  | Last Failure | Last Duration | F   |
|---|---|-----------------|---------------|--------------|---------------|-----|
| ✓ | ☀ | NRF-NewFeatures | 17 hr #3      | N/A          | 54 min        | ▶ ☆ |
| ⌛ | ☀ | NRF-Performance | N/A           | N/A          | N/A           | ▶ ☆ |
| ✓ | ☀ | NRF-Regression  | 8 hr 8 min #3 | N/A          | 7 min 49 sec  | ▶ ☆ |

Icon: S M L

NRF ATS has three pre-configured pipelines.


- **NRF-NewFeatures:** This pipeline has all the test cases delivered as part of NRF ATS - 24.2.6.
- **NRF-Performance:** This pipeline is not operational as of now. It is reserved for future releases of ATS.
- **NRF-Regression:** This pipeline has all the test cases delivered so far in the previous releases.

### 4.3.3 NRF-NewFeatures Pipeline

After identifying the NRF pipelines, configure ATS as one-time activity as per NRF deployment. In this pipeline, all the new testcases related to NRF are deployed. To configure its parameters:

1. Click **NRF-NewFeatures** in the **Name** column. The following screen appears:

**Figure 4-27 Configuring NRF-New Features**

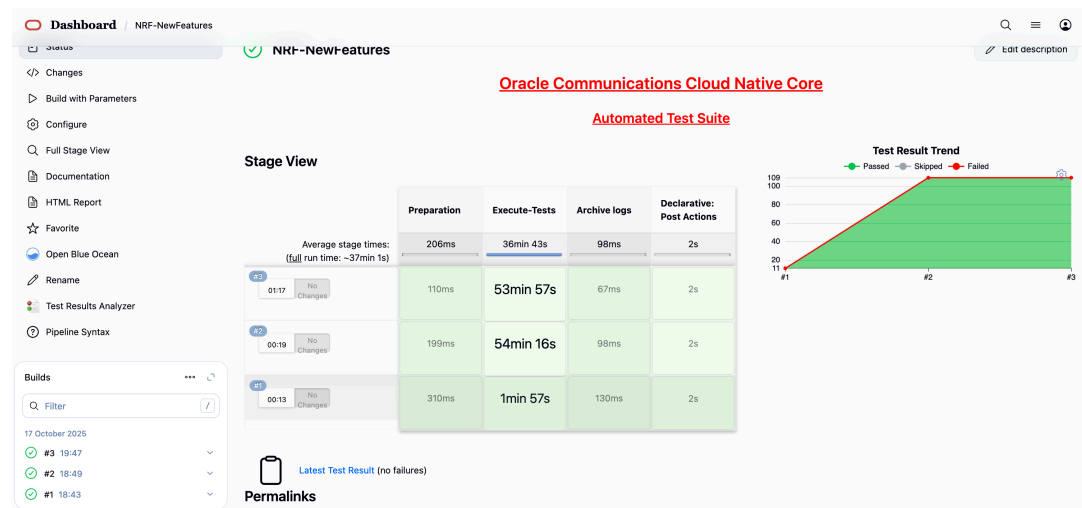

In the above screen:


- Click **Configure** to configure NRF-New Features.
  - Click **Documentation** to view the documented test cases, which are part of this NRF release.
  - Click the blue dots inside **Build History** box to view the success console logs of the "Sanity", "All-NewFeatures" respectively.
  - The **Stage View** represents the already deployed pipeline for the customer reference.
  - The **Test Results Analyzer** is the new plugin integrated in the NRF-ATS. This option can be used to display the previous history of all the execution build-wise. It will provide a graphical representation of the past execution together.
2. Click **Configure**. User must wait for the page to load completely. Once the page loads completely, click the **Pipeline** tab:

#### **Note**

Make sure that the following page loads completely before you perform any action on it. Also, do not modify any configuration other than shown below.



Figure 4-28 Pipeline Tab

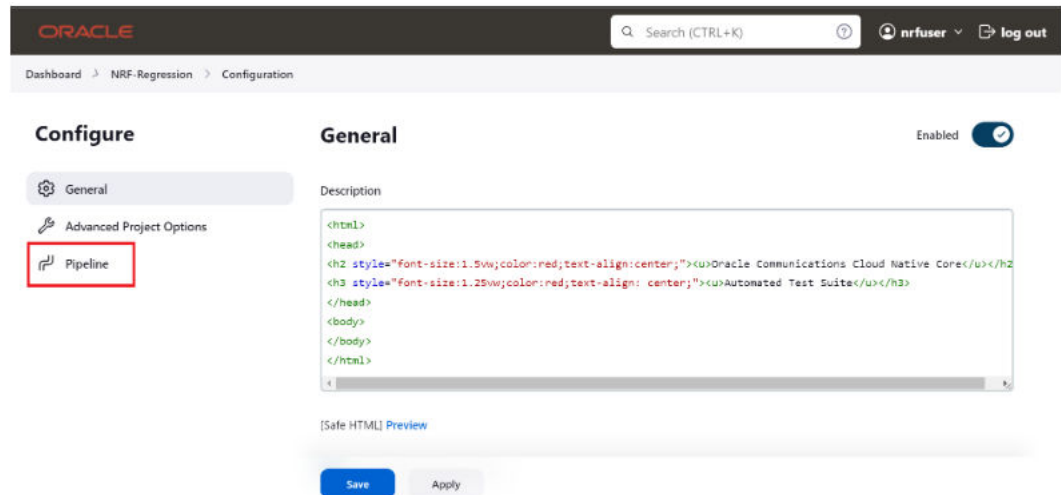

The **Pipeline** section of the configuration page appears as follows:

Figure 4-29 Pipeline Section

```
node ('built-in'){
  //a = SELECTED_NF      b = NF_NAMESPACE      c = FT_ENDPOINT      d = GATEWAY_IP      e = GATEWAY_PORT
  //f = CONFIG_IP        g = CONFIG_PORT        h = STUB_IP          i = STUB_PORT        j = NFINSTANCEID
  //k = PROMETHEUS_IP    l = PROMETHEUS_PORT    m = RERUN_COUNT      n = PROMETHEUS_URI   o = HELM_RELEASE_NAME
  //p = MYSQL_HOST      q = PRIVILEGED_USER_SECRET_NAME  r = DISCOVERY_WAIT_TIME
  //s = REPLICATION_STATUS_URI  t = CLUSTER_DOMAIN  u = REGISTER_WRITE_WAIT_TIME
  //v = SUBSCRIPTION_WAIT_TIME  w = ACCESSTOKEN_WAIT_TIME  x = REGISTER_READ_WAIT_TIME
  withEnv([

  ]){

  sh '''
    sh /var/lib/jenkins/ocnrf_tests/preTestConfig.sh \
    -a NRF \
    -b ocnrf \
    -c ocnrf-ingressgateway.ocnrf.svc.cluster.local:80 \
    -d ocnrf-ingressgateway.ocnrf \
    -e 80 \
    -f ocnrf-nrfconfiguration.ocnrf \
    -g 8080 \
    -h notify-stub-service.ocnrf \
    -i 8080 \
    -j 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c \
    -k oso-prom-svr.oso \
    -l 80 \
    -m 2 \
    -n /prometheus/api/ \
    -o ocnrf \
    -p mysql-connectivity-service.ocnrf \
    -q privilegeduser-secret \
    -r 0.5 \
    -s http://ocnrf-ocnrf-app-info:5906/status/category/replicationstatus \
    -t svc.cluster.local \
    -u 0 \
    -v 0 \
    -w 0 \
    -x 0
  '''
}
```

In the above screenshot, change the values of the '**Pipeline script**'. The content of the pipeline script is as follows:

Figure 4-30 Pipeline Script

```

1 node ('built-in'){
2   //a = SELECTED_NF    b = NF_NAMESPACE    c = FT_ENDPOINT    d = GATEWAY_IP    e = GATEWAY_PORT
3   //f = CONFIG_IP      g = CONFIG_PORT    h = STUB_IP      i = STUB_PORT      j = NFINSTANCEID
4   //k = PROMETHEUS_IP  l = PROMETHEUS_PORT m = RERUN_COUNT  n = PROMETHEUS_URI o = HELM_RELEASE_NAME
5   //p = MYSQL_HOST     q = PRIVILEGED_USER_SECRET_NAME  r = DISCOVERY_WAIT_TIME
6   //s = REPLICATION_STATUS_URI    t = CLUSTER_DOMAIN    u = REGISTER_WRITE_WAIT_TIME
7   //v = SUBSCRIPTION_WAIT_TIME    w = ACCESS_TOKEN_WAIT_TIME    x = REGISTER_READ_WAIT_TIME
8   withEnv([
9     ])
10 }
11
12 sh '''
13   sh /var/lib/jenkins/ocnrf_tests/preTestConfig.sh \
14   -a NRF \
15   -b ocats \
16   -c ocnrf-ingressgateway.ocats:80 \
17   -d ocnrf-ingressgateway.ocats \
18   -e 80 \
19   -f ocnrf-nrfconfiguration.ocats \
20   -g 8080 \
21   -h notify-stub-service.ocats \
22   -i 8080 \
23   -j 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c \
24   -k oso-prom-svr.oso \
25   -l 80 \
26   -m 0 \
27   -n /prometheus/api/ \
28   -o ocnrf \
29   -p database-mysql-cne \
30   -q privilegeduser-secret \
31   -r 0.5 \
32   -s http://ocnrf-ocnrf-app-info:5906/status/category/replicationstatus \
33   -t thruato \
34   -u 0 \
35   -v 0 \
36   -w 0 \
37   -x 0
38   ...
39   if([env.Include_Regression == "${Include_Regression}"]) == "YES"{
40     sh '''sh /var/lib/jenkins/common_scripts/merge_jenkinsfile.sh'''
41     load "/var/lib/jenkins/ocnrf_tests/jenkinsData/Jenkinsfile-Merged"
42   }
43   else{
44     load "/var/lib/jenkins/ocnrf_tests/jenkinsData/Jenkinsfile-NewFeatures"
45   }
46 }
47 }
48 }

```

**Note**

The user must not change any other value apart from **line number 15 to line 37**.

You can change the parameter values from "a" - to - "x" as per user requirement. The parameter details are available as comments from line number 2 - to - 7.

- **a:** Name of the NF to be tested in capital (NRF).
- **b:** Namespace in which the NRF is deployed.
- **c:** endPointIP: endPointPort value used while deploying NRF with the help of helm chart.
- **d:** Comma separated values of NRF1 and NRF2 ingress gateway service (For example: ocnrf-ingressgateway.ocnrf,1.1.1.1). It is also known as cluster\_domain.
- **e:** Comma separated values of NRF1 and NRF2 port of ingressgateway service (For example: 80,31000).
- **f:** Comma separated values of NRF1 and NRF2 configuration service (For example: ocnrf-nrfconfiguration.ocnrf,1.1.1.1). It is also known as cluster\_domain.
- **g:** Comma separated values of NRF1 and NRF2 port of configuration service (For example: 8080, 31001).
- **h:** Name\_of\_stub\_service.namespace (notify-stub-service.ocnrf).
- **i:** Port of stub service (8080).
- **j:** NRF\_Instance ID (6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c).

- **k:** Name\_of\_Prometheus\_service.namespace (occne-prometheus-server.occne-infra).
- **l:** Port of Prometheus service (80).
- **m:** Number of times the re-run of failed case is allowed (default as 2).
- **n:** URI of Prometheus service (/api/) -
  - Use "/api/" for CNE version till 1.6.0 and "/prometheus/api/" for CNE version 1.7.0 and 1.8.0.
  - For, **CNE 1.9.x**, **CNE 1.10.x**, and **CNE 22.1.0**, cluster name is needed in the URI. The URI must be **<cluster\_name>/prometheus/api**. For example: **/bmw/prometheus/api** (For more details on the Prometheus URI, check corresponding CNE version's user guide.)
  - If OSO is being used, use **"/api/"** for OSO-1.6.1 or earlier and use **"/prometheus/api/"** for OSO-1.6.2 or later.
  - For OSO-1.10.0, the URI must be **<cluster\_name>/prometheus/api**. For example: **/bmw/prometheus/api** (For more details on the Prometheus URI, check corresponding OSO version's user guide)
- **o:** Helm\_release\_name used to deploy NRF
- **p:** Host name of MySQL (For example: mysql-connectivity-service)
- **q:** Privileged User secret name (For example: privilegeduser-secret)
- **r:** wait time before sending discovery request (0.5)
- **s:** comma-separated values of replicationStatusUri(s) of the appinfo(s).
- **t:** the cluster domain
- **u:** wait time before sending registration requests for write operations
- **v:** wait time before sending subscription requests
- **w:** wait time before sending accesstoken requests
- **x:** wait time before sending registration requests for read operation

**Note**

- If the **2-Site-Geo** cases are run, the user has to provide values for NRF2 in corresponding environment variables in the above script as per the deployment. A sample configuration is given as below:

```
node ('master'){
    //a = SELECTED_NF      b = NF_NAMESPACE      c =
FT_ENDPOINT      d = GATEWAY_IP      e = GATEWAY_PORT
    //f = CONFIG_IP      g = CONFIG_PORT      h =
STUB_IP      i = STUB_PORT      j = NFINSTANCEID
    //k = PROMETHEUS_IP  l = PROMETHEUS_PORT  m =
RERUN_COUNT      n = PROMETHEUS_URI      o = HELM_RELEASE_NAME
    //p = MYSQL_HOST      q =
PRIVILEGED_USER_SECRET_NAME      r = DISCOVERY_WAIT_TIME
    //s = REPLICATION_STATUS_URI      t =
CLUSTER_DOMAIN      u = REGISTER_WRITE_WAIT_TIME
    //v = SUBSCRIPTION_WAIT_TIME      w =
ACCESSTOKEN_WAIT_TIME      x =
REGISTER_READ_WAIT_TIME
    sh '''
        sh /var/lib/jenkins/ocnrf_tests/preTestConfig.sh \
        -a NRF \
        -b occne-cndbtierone,occne-cndbtiertwo \
        -c ocnrf-
ingressgateway.ocnrf.svc.cluster.local:80,ocnrf-1-
ingressgateway.ocnrf.svc.cluster.local:80 \
        -d ocnrf-ingressgateway.occne-cndbtierone,ocnrf-1-
ingressgateway.occne-cndbtiertwo \
        -e 80,80 \
        -f ocnrf-nrfconfiguration.occne-cndbtierone,ocnrf-1-
nrfconfiguration.occne-cndbtiertwo \
        -g 8080,8080 \
        -h notify-stub-service.occne-cndbtierone,notify-stub-
service02.occne-cndbtierone \
        -i 8080,8080 \
        -j 6faf1bbc-6e4a-4454-a507-
a14ef8e1bc5c,6faf1bbc-6e4a-4454-a507-a14ef8e1bc5d \
        -k oso-prom-svr.oso \
        -l 80 \
        -m 2 \
        -n /prometheus/api/ \
        -o ocnrf,ocnrf-1 \
        -p mysql-connectivity-service \
        -q privilegeduser-secret \

        -r 0.5 \
        -s http://ocnrf-ocnrf-app-info:5906/status/category/
replicationstatus,http://ocnrf-1-ocnrf-app-info:5906/status/
category/replicationstatus \
        -t svc.cluster.local \
        -u 0 \
        -v 0 \
        -w 0 \
        -x 0
```

```

'''
    if(env.Include_NewFeatures && "${Include_NewFeatures}" ==
"YES"){
        sh '''sh /var/lib/jenkins/common_scripts/
merge_jenkinsfile.sh'''
        load "/var/lib/jenkins/ocnrf_tests/jenkinsData/
Jenkinsfile-Merged"
    }
    else{
        load "/var/lib/jenkins/ocnrf_tests/jenkinsData/
Jenkinsfile-Regression"
    }
}
}
}

```

- If **3SiteGeo** and georedundancy suite in Regression pipeline cases are run, the user has to provide values for NRF2, NRF3 in corresponding environment variables in the above script as per the deployment. A sample configuration is given as below:

```

node ('master'){
    //a = SELECTED_NF      b = NF_NAMESPACE      c =
FT_ENDPOINT      d = GATEWAY_IP      e = GATEWAY_PORT
    //f = CONFIG_IP      g = CONFIG_PORT      h =
STUB_IP      i = STUB_PORT      j = NFINSTANCEID
    //k = PROMETHEUS_IP  l = PROMETHEUS_PORT      m =
RERUN_COUNT      n = PROMETHEUS_URI      o = HELM_RELEASE_NAME
    //p = MYSQL_HOST      q =
PRIVILEGED_USER_SECRET_NAME      r = DISCOVERY_WAIT_TIME
    //s = REPLICATION_STATUS_URI      t =
CLUSTER_DOMAIN      u = REGISTER_WRITE_WAIT_TIME
    //v = SUBSCRIPTION_WAIT_TIME      w =
ACCESSTOKEN_WAIT_TIME      x =
REGISTER_READ_WAIT_TIME
    sh '''
        sh /var/lib/jenkins/ocnrf_tests/preTestConfig.sh \
        -a NRF \
        -b occne-cndbtierone,occne-cndbtiertwo,occne-
cndbtierthree \
        -c ocnrf-
ingressgateway.ocnrf.svc.cluster.local:80,ocnrf-1-
ingressgateway.ocnrf.svc.cluster.local:80,ocnrf-2-
ingressgateway.ocnrf.svc.cluster.local:80 \
        -d ocnrf-ingressgateway.occne-cndbtierone,ocnrf-1-
ingressgateway.occne-cndbtiertwo,ocnrf-2-ingressgateway.occne-
cndbtierthree \
        -e 80,80,80 \
        -f ocnrf-nrfconfiguration.occne-cndbtierone,ocnrf-1-
nrfconfiguration.occne-cndbtiertwo,ocnrf-2-
nrfconfiguration.occne-cndbtierthree \
        -g 8080,8080,8080 \
        -h notify-stub-service.occne-cndbtierone,notify-stub-
service02.occne-cndbtierone,notify-stub-service03.occne-
cndbtierone \
        -i 8080,8080,8080 \
    '''
}

```

```

        -j 6faf1bbc-6e4a-4454-a507-
a14ef8e1bc5c,6faf1bbc-6e4a-4454-a507-
a14ef8e1bc5d,6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e \
        -k oso-prom-svr.oso \
        -l 80 \
        -m 2 \
        -n /prometheus/api/ \
        -o ocnrf,ocnrf-1,ocnrf-2 \
        -p mysql-connectivity-service \
        -q privilegeduser-secret \

        -r 0.5 \
        -s http://ocnrf-ocnrf-app-info:5906/status/category/
replicationstatus,http://ocnrf-1-ocnrf-app-info:5906/status/
category/replicationstatus,http://ocnrf-2-ocnrf-app-info:5906/
status/category/replicationstatus \
        -t svc.cluster.local \
        -u 0 \
        -v 0 \
        -w 0 \
        -x 0
    ...
    if(env.Include_NewFeatures && "${Include_NewFeatures}" ==
"YES"){
        sh '''sh /var/lib/jenkins/common_scripts/
merge_jenkinsfile.sh'''
        load "/var/lib/jenkins/ocnrf_tests/jenkinsData/
Jenkinsfile-Merged"
    }
    else{
        load "/var/lib/jenkins/ocnrf_tests/jenkinsData/
Jenkinsfile-Regression"
    }
}
}
}

```

### Note

If user is using CNE1.6 or OSO 1.6.1 or earlier, change the Prometheus service URI (-n) to "/api/" and Prometheus service name and port to appropriate values. For CNE 1.7.0 or OSO 1.6.2 or later, retain the default value **"/prometheus/api/"**. If OSO 1.10.0 is used, use the URI along with the cluster\_name (for example: **/bmw/prometheus/api**).

3. Click **Save** after making necessary changes. The NRF-NewFeatures screen appears. Click the **Build with Parameters** link available in the left navigation pane of the **NRF-NewFeatures** Pipeline screen.

In the Pipeline screen, there are three **Select\_Option(s)**, which are:


- **All:** This is the default option. It runs all the NRF test cases. Scroll down and click **Build** to execute all the test cases.

- **Sanity:** It is recommended to run sanity before running any test case. It ensures all the deployments are done properly.
  - **Single/MultipleFeatures:** This option allows you to select any number of test cases that you want to run from the list of total test cases available for execution. After selecting the test cases, scroll down and click **Build** to run the selected NRF test cases.
4. Select one of the following configuration types:
- **Product\_Config:** On selecting this option, test cases from product folders are populated on ATS UI and product configuration is applied to them via the key-value pair and yaml files defined or present in the "Product Config" folder.
  - **Custom\_Config:** On selecting this option, test cases from custom folders are populated on ATS UI and custom configuration is applied to them via the key-value pair and yaml files defined or present in the "Custom Config" folder. To use the [Parameterization](#) feature, always select the Custom\_Config option. User can copy, add, or delete the required test cases that are available for the NRF and place them appropriately within the custom folder for NRF-NewFeatures. Reload the page to view the test cases available in the custom NewFeatures folder. For more information, see [Parameterized approach for SUT custom configuration](#).

Based on the requirement, user can select any of the above option and click on "**Build**". The NRF testcases are divided into NRF Service operations. The classification is as follows:

- **NRF Sanity** - This feature file contains all the basic sanity cases for NRF ATS to validate the deployment is correct or not. It is advisable for user to run these cases before starting a complete suite.
- **Discovery** - These feature files are listed with a prefix as "**Disc**". All the discovery microservice related cases will be listed once this option is selected.
- **NRF Functional** - These feature files are listed with a prefix as "**Feat**". All the functional cases will be listed once this option is selected.
- **Registration** - These feature files are listed with a prefix as "**Upd**". These are related to update operation of registered profiles. All the registration cases will be listed once this option is selected.
- **Subscription** - These feature files are listed with a prefix as "**Subs**". All the subscription microservice related cases will be listed once this option is selected.
- **Roaming** - These feature files are listed with a prefix as "**Roaming**". All the roaming cases will be listed once this option is selected.

Figure 4-31 Sample Screen: NRF-ATS Full Execution

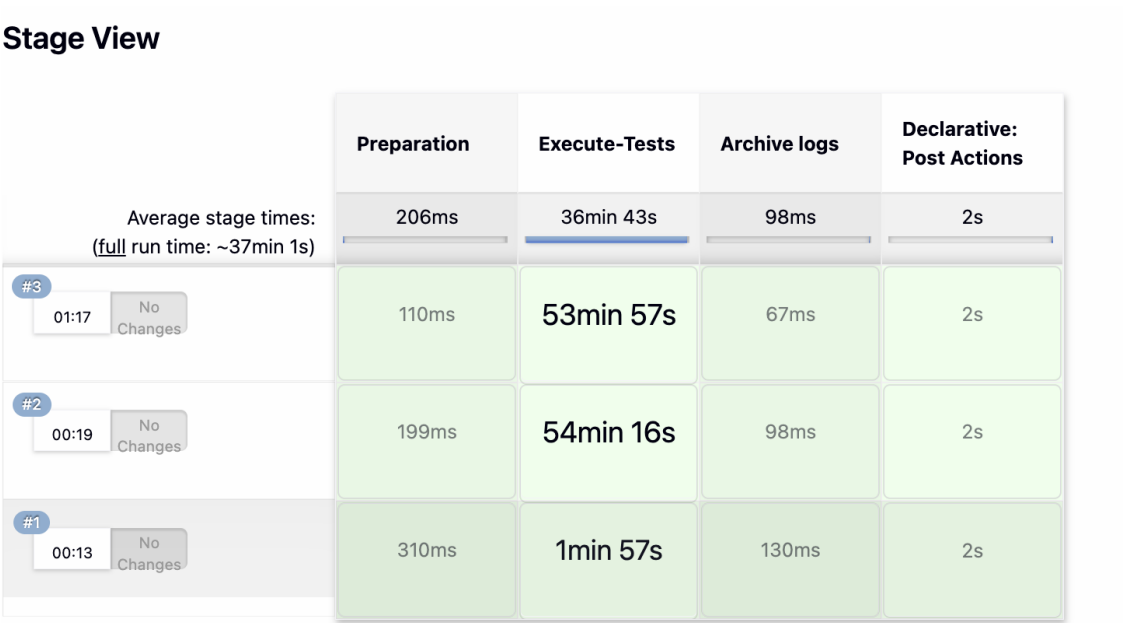

A sample consolidated test report is shown below, when rerun is set to 2:

Figure 4-32 Test Cases Result - Sanity

```
1 feature passed, 0 failed, 0 skipped
11 scenarios passed, 0 failed, 0 skipped
193 steps passed, 0 failed, 0 skipped, 0 undefined
Took 1m1.068s
[Pipeline] sh
+ cd /var/lib/jenkins/ocnrf_tests
++ cat /var/lib/jenkins/ocnrf_tests/environ.sh
++ grep RERUN
++ cut '-d;' -f1
++ cut -d= -f2
+ rerun=0
+ sh re-run.sh 0 /var/lib/jenkins/.jenkins/workspace/NRF-NewFeatures
1
Scenario passed
```

**Note**

For more details on consolidated test report, see [Managing Final Summary Report, Build Color, and Application Log](#).



**Figure 4-33 Test Cases Result - All-NewFeatures**

```

2025-10-17 19:43:28,751 [32m      INFO LOG.AllHooks:256 [0m| [32mInside after_all [0m
2025-10-17 19:43:28,751 [32m      INFO LOG.AllHooks:331 [0m| [32mExiting after_all [0m
38 features passed, 0 failed, 0 skipped
109 scenarios passed, 0 failed, 0 skipped
2218 steps passed, 0 failed, 0 skipped, 0 undefined
Took 28m59.621s
[Pipeline] sh
+ cd /var/lib/jenkins/ocnrf_tests
++ cat /var/lib/jenkins/ocnrf_tests/envirion.sh
++ grep RERUN
++ cut -d= -f2
++ cut '-d;' -f1
+ rerun=1
+ sh re-run.sh 1 /var/lib/jenkins/.jenkins/workspace/NRF-NewFeatures
/var/lib/jenkins/ocnrf_tests/rerun_failing.features does not exist
1
Scenario passed

```

### Parameterized approach for SUT custom configuration

Using this feature, user can make the following customizations to custom folders

- Add new test cases by adding datafiles
- Remove test cases
- Modify the parameters and their values in the key-value pair or <feature>.yaml files

To run ATS test cases, user can maintain as many versions of **Custom\_Config** folder by using the following naming convention:

Cust ConfigN

where N can be any number

At the time of execution, ensure to rename the required folder to **Cust Config** folder as Jenkins always retrieves data from this folder when user selects **Custom\_Config**.

### Updating Global Parameters

To use Custom\_Config, it is required to change the value of **cust\_folder** from **data** to **cust\_data** in global.yaml file. In addition, you can customize the parameters and their respective values in the global.yaml as per the requirements.

### Updating Feature Parameters

Consider the following points when customizing <feature>.yaml files for parameterized feature:

- In addition to global.yaml parameters, feature files may also contain parameters for which user can update values at the time of running pipelines.
- Changing the values of parameters tagged as "Feature Specific Value" may cause failures at the time of running pipelines.
- Values for parameters tagged with #START\_GLOBAL and #END\_GLOBAL tags take values from global.yaml.

**Note**

For NRF-ATS release 24.2.6, parameterization is supported for NRF NewFeatures pipeline only.

## 4.3.4 NRF-NewFeatures Documentation

To view NRF test cases, go to **NRF-NewFeatures** pipeline and click the **Documentation** link in the left navigation pane. It lists all the test cases provided as part of NRF ATS -24.2.x along with sanity cases.

The NRF test cases are divided into multiple groups based on the functionality.

- **NF\_ACCESSTOKEN\_CASES** - All the test cases for validating accesstoken operation will be listed once this option is selected.
- **NF\_CONFIGURATION\_CASES**- All the cases related to NRF configuration will be listed once this option is selected.
- **NF\_DISCOVERY\_CASES** - All the discovery microservice related cases will be listed once this option is selected.
- **NF\_FUNCTIONAL\_CASES** - All the functional cases will be listed once this option is selected.
- **NF\_REGISTRATION\_FT\_CASES**- All the registration cases will be listed once this option is selected.
- **NF\_ROAMING\_CASES** - All the roaming cases will be listed once this option is selected.
- **NF\_SUBSCRIPTION\_CASES** - All the subscription microservice related cases will be listed once this option is selected.
- **NF\_SLF\_CASES** - All the SLF related cases will be listed once this option is selected.

The following screenshot shows all the NRF features:

Figure 4-34 NRF-NewFeatures Documentation

[Back to NRF-NewFeatures](#)

pages

# My Project

## Related Pages

Here is a list of all related documentation pages:

|                        |  |
|------------------------|--|
| NF_ACCESSTOKEN_CASES   |  |
| NF_CONFIGURATION_CASES |  |
| NF_DISCOVERY_CASES     |  |
| NF_FUNCTIONAL_CASES    |  |
| NF_REGISTRATION_CASES  |  |
| NF_ROAMING_CASES       |  |
| NF_SANITY_CASES        |  |
| NF_SLF_CASES           |  |
| NF_SUBSCRIPTION_CASES  |  |

Click any functionality to view its test cases and scenarios of each test case as shown below:

Figure 4-35 Sample Feature: NF\_BASIC\_SANITY\_CASES

**NF\_BASIC\_SANITY\_CASES****Sanity.feature**

**Description :** This feature file validates successful scenarios for all the basic operations performed by NRF

**Scenario-1 : Plmn Configuration**

**Objective :** Validate the successful configuration of nrfPlmnList

**Pre-requisite :** NRF is already deployed with latest images and ATS client is up and running.

| Procedure                                                                   | Expected Result                                        |
|-----------------------------------------------------------------------------|--------------------------------------------------------|
| 1.) Send a configuration request to NRF to set nrfPlmnList with valid value | 1.) Configuration is successful with response code 200 |
| 2.) Validate the response body.                                             | 2.) Response body should have the configured plmn.     |

**Scenario-2 : Registration**

**Objective :** Validate the successful registration of an NF with mandatory and conditional parameters

**Pre-requisite :** NRF is already deployed with latest images and ATS client is up and running.

| Procedure                                                                                              | Expected Result                                                         |
|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| 1.) Send registration request for an NF to NRF with mandatory and conditional parameters in nrfProfile | 1.) Registration should be successful with response code 201            |
| 2.) Perform a GET operation to fetch the registered NF information                                     | 2.) Verify that GET operation provides the registered profile of the NF |

Based on the functionalities covered under **Documentation**, the **Build Requires Parameters** screen displays test cases. To navigate back to the Pipeline **NRF-NewFeatures** screen, click the **Back to NRF-NewFeatures** link available on top left corner of the screen.

## 4.3.5 NRF-Regression Pipeline

This pre-configured pipeline contains all the test cases delivered till NRF ATS 24.2.x. However, some test cases are updated as per new implementation of NRF.

The configuration method and parameters are same as the **NewFeatures** pipeline.

Only difference in this pipeline is, while executing **2-Site-Geo** and **3-Site-Geo** test cases, user has to provide appropriate values for NRF2 and NRF 3 in the Pipeline script. In this pipeline, user will not get option to run **Sanity**.


The NRF-Regression test cases are divided into following service operations:

- **2-Site-Geo** - These feature files are listed with a prefix as **"Geo\_Redundancy"**.
- **3-Site-Geo** - These feature files contain all the cases which are executed on 3 Site GEO NRF.
- **CCA-Header** - These feature files contain all cases related to CCA Header feature.
- **NF-FQDN-Authentication** - These feature files are listed with a prefix as **"NfAuthentication"**.
- **AccessToken** - These feature files are listed with a prefix as **"oAuth"** and **"AccessToken"**.
- **Alerts** - These feature files are list with a prefix as **"Alert"**.
- **Configuration** - These feature files are listed with a prefix as **"Config"** and **"SystemOptions"**.
- **Discovery** - These feature files are listed with a prefix as **"Disc"**.
- **NRF Forwarding** - These feature files are listed with a prefix as **"Forwarding"**.
- **NRF Functional** - These feature files are listed with a prefix as **"Feat"**.

- **Key-ID** - These feature files are listed with a prefix as "**Kid**".
- **NRF State Data** - These feature files are listed with a prefix as "**State**".
- **Preferred Locality** - These feature files are listed with a prefix as "**Pref**".
- **Registration** - These feature files are listed with a prefix as "**HBTimerEnhancement**", "**Reg**" and "**Upd**". These are related to update operation of registered profiles.
- **NRF SLF** - These feature files are listed with a prefix as "**SLF**".
- **Subscription** - These feature files are listed with a prefix as "**Subs**".
- **NRF Growth** - These feature files contain all cases related to NRF Growth feature.

The following screenshot shows the NRF-Regression.

**Figure 4-36 NRF-Regression**

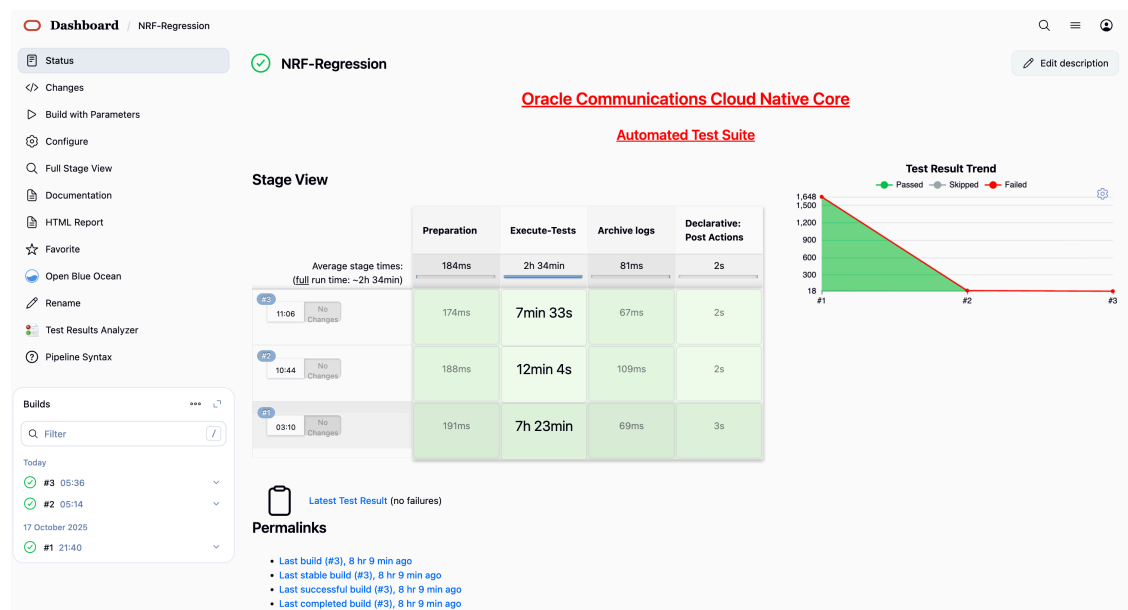

The following screenshot shows successful execution as part of ATS image.

**Figure 4-37 NRF-Regression - All-default-Regression**

```

585 features passed, 0 failed, 0 skipped
1649 scenarios passed, 0 failed, 0 skipped
26401 steps passed, 0 failed, 0 skipped, 0 undefined
Took 248m13.552s
[Pipeline] sh
+ cd /var/lib/jenkins/ocnrf_tests
++ cat /var/lib/jenkins/ocnrf_tests/envron.sh
++ grep RERUN
++ cut '-d;' -f1
++ cut -d= -f2
+ rerun=1
+ sh re-run.sh 1 /var/lib/jenkins/.jenkins/workspace/NRF-Regression
/var/lib/jenkins/ocnrf_tests/rerun_failing.features does not exist
1
Scenario passed
[Pipeline] sh
+ cd /var/lib/jenkins/ocnrf_tests
++ cat /var/lib/jenkins/ocnrf_tests/envron.sh
++ grep RERUN
++ cut -d= -f2
++ cut '-d;' -f1
+ rerun=1
+ sh report.sh 1
Final Result:-
Total-Features RUN 585, PASS 585, FAIL 0

```

### 4.3.6 NRF-Regression Documentation

Click **Documentation** in the left navigation pane of the **NRF-Regression** pipeline to view all the test cases provided till NRF ATS 24.2.x.

The NRF test cases are divided into multiple groups based on following functionalities:

- **NF\_ALERT\_CASES** - Test case for validating alerts will be listed once this option is selected.
- **NF\_CCA\_HEADER\_CASES** - Cases related to CCAHeader feature will be listed once this option is selected.
- **NF\_CHFINFO\_CASES** - All the ChfInfo enhancement cases will be listed once this option is selected.
- **NF\_CONFIGURATION\_CASES** - Cases related to NRF configuration will be listed once this option is selected.
- **NF\_DISCOVERY\_CASES** - All the discovery microservice related cases will be listed once this option is selected.

- **NRF\_FORWARDING\_CASES** - All the forwarding related cases will be listed once this option is selected.
- **NF\_FQDN\_AUTHENTICATION\_CASES** - All the NF FQDN authentication cases will be listed once this option is selected.
- **NF\_FUNCTIONAL\_CASES** - All the functional cases will be listed once this option is selected.
- **NF\_GEO\_REDUNDANCY\_CASES** - All the Geo-Redundancy related cases (2-Site-GEO and 3-Site-Geo both) will be listed once this option is selected.
- **NF\_KEY\_ID\_FEATURE\_CASES** - All the K-ID feature related cases will be listed once this option is selected.
- **NF\_OAUTH\_CASES** - All the accesstoken related cases will be listed once this option is selected.
- **NRF\_PREFERRED\_LOCALITY\_CASES** - All the preferred locality feature related cases will be listed once this option is selected.
- **NF\_REGISTRATION\_FT\_CASES** - All the registration related cases will be listed once this option is selected.
- **NRF\_ROAMING\_CASES** - All the roaming related cases will be listed once this option is selected.
- **NF\_SLF\_FEATURE\_CASES** - All the SLF related cases will be listed once this option is selected.
- **NF\_STATE\_DATA\_CASES** - All the nfStateData related cases will be listed once this option is selected.
- **NF\_SUBSCRIPTION\_CASES** - All subscription related cases will be listed once this option is selected.
- **NF\_NRF\_GROWTH** - All growth related cases will be listed once this option is selected.

Figure 4-38 NRF-Regression Documentation

# My Project

| Main Page                                                 | Related Pages |  |
|-----------------------------------------------------------|---------------|--|
| <h2>Related Pages</h2>                                    |               |  |
| <p>Here is a list of all related documentation pages:</p> |               |  |
| <a href="#">NF_ALERT_CASES</a>                            |               |  |
| <a href="#">NF_BASIC_SANITY_CASES</a>                     |               |  |
| <a href="#">NF_CCA_HEADER_CASES</a>                       |               |  |
| <a href="#">NF_CHFINFO_CASES</a>                          |               |  |
| <a href="#">NF_CONFIGURATION_CASES</a>                    |               |  |
| <a href="#">NF_DISCOVERY_CASES</a>                        |               |  |
| <a href="#">NF_FQDN_AUTHENTICATION_CASES</a>              |               |  |
| <a href="#">NF_FUNCTIONAL_CASES</a>                       |               |  |
| <a href="#">NF_GEO_REDUNDANCY_CASES</a>                   |               |  |
| <a href="#">NF_KEY_ID_FEATURE_CASES</a>                   |               |  |
| <a href="#">NF_NRF_GROWTH</a>                             |               |  |
| <a href="#">NF_OAUTH_CASES</a>                            |               |  |
| <a href="#">NF_REGISTRATION_FT_CASES</a>                  |               |  |
| <a href="#">NF_SLF_FEATURE_CASES</a>                      |               |  |
| <a href="#">NF_STATE_DATA_CASES</a>                       |               |  |
| <a href="#">NF_SUBSCRIPTION_CASES</a>                     |               |  |
| <a href="#">NRF_FORWARDING_CASES</a>                      |               |  |
| <a href="#">NRF_PREFERRED_LOCALITY_CASES</a>              |               |  |
| <a href="#">NRF_ROAMING_CASES</a>                         |               |  |

The following sample screen shows documentation of Regression pipeline for NRF ATS.



Figure 4-39 Sample Screen: NRF-Regression Documentation

## NF\_CONFIGURATION\_CASES

## Config01\_NfCallbackUri.feature

**Description :** This feature file validates the NRF configurations with CALLBACK\_URI

**Scenario-1 : With correct fqdn**

**Objective :** Validate the configuration request for CALLBACK\_URI with correct fqdn

**Pre-requisite :** NRF is already deployed with latest images and ATS client is up and running.

| Procedure                                                                         | Expected Result                                                              |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| 1.) Send a request to NRF to GET existing configuration                           | 1.) Configuration GET request should be successful                           |
| 2.) Send a request to NRF to set configuration with correct fqdn for callback uri | 2.) Configuration request should be successful with response code 200        |
| 3.) Send a request to NRF to GET configuration                                    | 3.) Configuration GET request should successfully return updated information |

**Scenario-2 : With valid pattern**

**Objective :** Validate the configuration request for CALLBACK\_URI with valid pattern

**Pre-requisite :** NRF is already deployed with latest images and ATS client is up and running.

| Procedure                                                                          | Expected Result                                                              |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| 1.) Send a request to NRF to GET existing configuration                            | 1.) Configuration GET request should be successful                           |
| 2.) Send a request to NRF to set configuration with valid pattern for callback uri | 2.) Configuration request should be successful with response code 200        |
| 3.) Send a request to NRF to GET configuration                                     | 3.) Configuration GET request should successfully return updated information |

## 4.4 Running NSSF Test Cases using ATS

### 4.4.1 Prerequisites

The prerequisites to run NSSF Test Cases using NSSF ATS 24.2.0 are:

- Deploy NSSF 24.2.0 with default helm configurations using helm charts.
- All NSSF microservices must be up and running.
- Both NSSF ATS and ATS Deployment needs to be same namespace.
- For NSSF ATS 24.2.0, deploy one stub server and the service name should be "**amf-stubserver**". It is required to run AMF-subscription Notification functionality test cases.
- For NSSF ATS 24.2.0, deploy one stub server and the service name should be "**nrf-stubserver**". It is required to run NRF-subscription Notification functionality test cases.

### 4.4.2 Logging into ATS

Before logging into ATS, [deploy ATS](#) using HELM charts as shown below:

Verify ATS deployment

```
[opc@ocnssf-oci-phx-einstein-bastion-01 ~]$ helm status ocats
```

```
NAME: ocats
LAST DEPLOYED: Thu May 30 10:21:40 2024
NAMESPACE: cicdnssf-240530102024
STATUS: deployed
```

REVISION: 1  
TEST SUITE: None

There are two ways to log in to ATS GUI.

- When an external load balancer (metalLB in case of OCCNE) is available and you provide an external IP to the ATS service, the user can log in to ATS GUI using <External-IP>:8080.
- When you do not provide an external IP to the ATS service, open the browser and enter the external IP of the worker node and nodeport of the ATS service to log in to the ATS GUI.  
<Worker-Node-IP>:<Node-Port-of-ATS>

**Note**

In the **Verifying ATS Deployment** screenshot, the ATS nodeport is highlighted in red as 32013. For more details on ATS deployment, refer to **NSSF ATS Installation Procedure**.

Open a browser and enter the IP Address and port details as <Worker-Node-IP>:<NodePort-of-ATS> (In the above example, the Worker-Node-IP and NodePort-of-ATS are 10.98.101.177:32013, which are shown as highlighted in the screenshot above).

The ATS login screen appears.

Oracle Communications Cloud Native Core - Automated Test Suite

Welcome to ATS!

Username

Password

☐ Keep me signed in

Sign in

To run ATS:

1. Enter the username as 'nssfuser' and password as 'nssfpaswd'. Click **Sign in**. A page with preconfigured pipelines appears.

**Note**

To modify the default login password, refer to [Modifying Login Password](#).

A page with preconfigured pipelines appears.

Oracle Communications Cloud Native Core

Automated Test Suite

CNCATS NSSF : 24.2.0

| S | W | Name ↓           | Last Success   | Last Failure | Last Duration | F   |
|---|---|------------------|----------------|--------------|---------------|-----|
| ☐ | ☐ | NSSF-HealthCheck | N/A            | N/A          | N/A           | ▶ ☆ |
| ☑ | ☐ | NSSF-NewFeatures | 4 hr 2 min #1  | N/A          | 17 min        | ▶ ☆ |
| ☐ | ☐ | NSSF-Performance | N/A            | N/A          | N/A           | ▶ ☆ |
| ☑ | ☐ | NSSF-Regression  | 3 hr 43 min #1 | N/A          | 1 hr 10 min   | ▶ ☆ |

Icon: S M L

- **NSSF-Healthcheck:** This pipeline does a test probe with SUT- trigger helm test and provides the results in Console Logs.
- **NSSF-New-Features:** This pipeline has all the test cases delivered as part of NSSF ATS - 24.2.0.
- **NSSF-Performance:** This pipeline is not operational as of now. It is reserved for future releases of ATS.
- **NSSF-Regression:** This pipeline has the test cases of all the previous releases.

### 4.4.3 NSSF-NewFeatures Pipeline

In this pipeline, you can configure ATS, which is a one-time activity as per System Under Test (SUT) deployment. You can also run all the new NSSF test cases using the pipeline. To configure its parameters:

1. Click **NSSF-NewFeatures** in the **Name** column. The following screen appears:

Dashboard > NSSF-NewFeatures >

Status ✓ NSSF-NewFeatures

Oracle Communications Cloud Native Core  
Automated Test Suite

Test Result Trend

55  
50  
45  
40  
35  
30  
27.5

#1

Stage View

Average stage times:  
(Average full run time: ~17min 28s)

| Preparation | Execute-Tests | 1st Stage | 1st Stage 1st Group | Logging / Rerun | Archive logs | Consolidated Output | Declarative: Post Actions |
|-------------|---------------|-----------|---------------------|-----------------|--------------|---------------------|---------------------------|
| 3s          | 45ms          | 80ms      | 17min 13s           | 159ms           | 144ms        | 737ms               | 4s                        |

Build History

Filter...

#1

30-May-2024, 8:02 am

Atom feed for all Atom feed for failures

May 30 13:32 No Changes

Latest Test Result (no failures)

Permalinks


- Last build (#1), 4 hr 4 min ago
- Last stable build (#1), 4 hr 4 min ago
- Last successful build (#1), 4 hr 4 min ago
- Last completed build (#1), 4 hr 4 min ago

In the above screen:

- Click **Configure** to access the configuration screen.
  - Click **Documentation** to view the documented test cases.
  - Click blue dots inside the **Build History** box to view the success console logs of the "All" and "Sanity" respectively.
  - The **Stage View** represents the already run pipeline for customer reference.
2. Click **Configure**. Users MUST wait for the page to load completely. Once the page loads completely, click the **Pipeline** tab to reach the Pipeline configuration as shown below:

### Warning

Make sure that the screen shown above loads completely before you perform any action on it. Also, do not modify any configuration other than that discussed below.

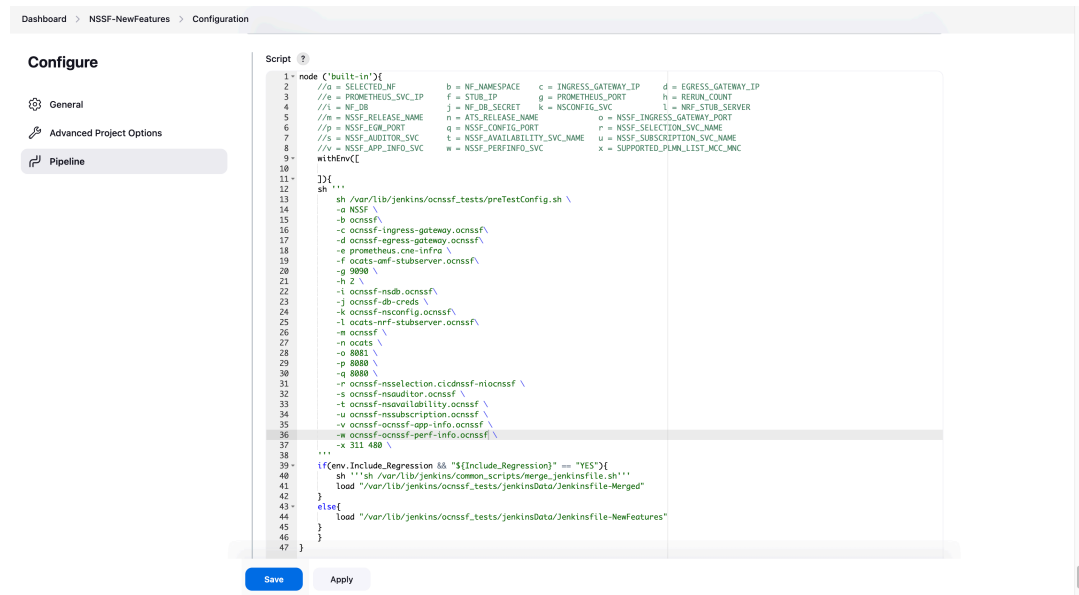

3. You can modify script pipeline parameters from "a" to "w" on the basis of your deployment environment and click Save. The content of the pipeline script is as follows:

```
node ('built-in'){
    //a = SELECTED_NF          b = NF_NAMESPACE      c =
    INGRESS_GATEWAY_IP        d = EGRESS_GATEWAY_IP
    //e = PROMETHEUS_SVC_IP    f = STUB_IP          g =
    PROMETHEUS_PORT           h = RERUN_COUNT
    //i = NF_DB                j = NF_DB_SECRET      k =
    NSCONFIG_SVC              l = NRF_STUB_SERVER
    //m = NSSF_RELEASE_NAME    n = ATS_RELEASE_NAME    o =
    NSSF_INGRESS_GATEWAY_PORT
    //p = NSSF_EGW_PORT        q = NSSF_CONFIG_PORT    r =
    NSSF_SELECTION_SVC_NAME
    //s = NSSF_AUDITOR_SVC     t = NSSF_AVAILABILITY_SVC_NAME u =
    NSSF_SUBSCRIPTION_SVC_NAME
    //v = NSSF_APP_INFO_SVC    w = NSSF_PERFINFO_SVC      x =
    SUPPORTED_PLMN_LIST_MCC_MNC
    withEnv([

    ]){
    sh '''
        sh /var/lib/jenkins/ocnssf_tests/preTestConfig.sh \
        -a NSSF \
        -b ocnssf\
        -c ocnssf-ingress-gateway.ocnssf\
        -d ocnssf-egress-gateway.ocnssf\
        -e prometheus.cne-infra \
        -f ocats-amf-stubserver.ocnssf\
        -g 9090 \
        -h 2 \
        -i ocnssf-nsdb.ocnssf\
        -j ocnssf-db-creds \
        -k ocnssf-nsconfig.ocnssf\
        -l ocats-nrf-stubserver.ocnssf\
        -m ocnssf \
```

```

        -n ocats \
        -o 8081 \
        -p 8080 \
        -q 8080 \
        -r ocnssf-nsselection.ocnssf \
        -s ocnssf-nsauditor.ocnssf \
        -t ocnssf-nsavailability.ocnssf \
        -u ocnssf-nssubscription.ocnssf \
        -v ocnssf-ocnssf-app-info.ocnssf \
        -w ocnssf-ocnssf-perf-info.ocnssf \
        -x 311 480 \
    ...
    if(env.Include_Regression && "${Include_Regression}" == "YES"){
        sh '''sh /var/lib/jenkins/common_scripts/merge_jenkinsfile.sh'''
        load "/var/lib/jenkins/ocnssf_tests/jenkinsData/Jenkinsfile-Merged"
    }
    else{
        load "/var/lib/jenkins/ocnssf_tests/jenkinsData/Jenkinsfile-
NewFeatures"
    }
}
}

```

**Note**

The User MUST NOT change any other value apart from these parameters.

The description of these parameters is as follows:

- a: Name of the NF to be tested in capital (NSSF).
- b: Namespace in which the NSSF is deployed (default is ocnssf)
- c: Ingress Gateway IP address (default is ocnssf-ingress-gateway.ocnssf)
- d: Egress Gateway IP address (default is ocnssf-egress-gateway.ocnssf)
- e: Prometheus service IP address (default is prometheus.cne-infra)
- f: Stub service IP address (default is ocats-amf-stubserver.ocnssf)
- g: Port of Prometheus service (default is 80)
- h: Number of times the re-run of failed case is allowed (default is 2).
- i: Database name (default is ocnssf-nsdb.ocnssf)
- j Database secrets (default ocnssf-db-creds)
- k: NSSF config ip address (ocnssf-nsconfig.ocnssf)
- l: NRF stub server IP address (ocats-nrf-stubserver.ocnssf)
- m: NSSF release name (ocnssf)
- n: ATS release name (ocats)
- o: NSSF Ingress Gateway Port
- p: NSSF Egress Gateway Port
- q: NSSF Config Port

- r: NSSF Selection Service Name
- s: NSSF Auditor Service Name
- t: NSSF Availability Service Name
- u: NSSF Subscription Service Name
- v: APP Info Service Name
- w: Perf info Service Name
- x: NSSF Supported PLMN

**Note**

- Do not change any value if the OCCNE cluster is used and NSSF, ATS, and STUB are deployed in the ocnssf namespace.
- In the above image NSSF Helm release name is "ocnssf", ATS Helm Release Name is "ocats" and namespace is "ocnssf". If any change in helm release name of NSSF, ATS and namespace needs to be updated accordingly. For example, NSSF Helm release name is "ocnssfats" and ATS Helm release name is "ocatsnssf" and namespace is "ocnssf2410", then above Pipeline Configuration should be edited as shown below.
- NSSF Helm release name should be updated in "c d i k m r s t u v w" if any change in NSSF helm release name apart from "ocnssf".
- ATS Helm release name Should be updated in "f l n", if any change in ATS Helm release name apart from "ocats".

```
node ('built-in'){
    //a = SELECTED_NF          b = NF_NAMESPACE      c =
    INGRESS_GATEWAY_IP        d = EGRESS_GATEWAY_IP
    //e = PROMETHEUS_SVC_IP    f = STUB_IP          g =
    PROMETHEUS_PORT           h = RERUN_COUNT
    //i = NF_DB                j = NF_DB_SECRET      k =
    NSCONFIG_SVC              l = NRF_STUB_SERVER
    //m = NSSF_RELEASE_NAME    n = ATS_RELEASE_NAME
    o = NSSF_INGRESS_GATEWAY_PORT
    //p = NSSF_EGW_PORT        q = NSSF_CONFIG_PORT
    r = NSSF_SELECTION_SVC_NAME
    //s = NSSF_AUDITOR_SVC     t = NSSF_AVAILABILITY_SVC_NAME
    u = NSSF_SUBSCRIPTION_SVC_NAME
    //v = NSSF_APP_INFO_SVC    w = NSSF_PERFINFO_SVC
    x = SUPPORTED_PLMN_LIST_MCC_MNC
    withEnv([

    ]){
    sh '''
        sh /var/lib/jenkins/ocnssf_tests/preTestConfig.sh \
        -a NSSF \
        -b ocnssf2410\
        -c ocnssfats-ingress-gateway.ocnssf2410\
        -d ocnssfats-egress-gateway.ocnssf2410\
        -e prometheus.cne-infra \
        -f ocatsnssf-amf-stubserver.ocnssf2410\
        -g 9090 \
        -h 2 \
        -i ocnssfats-nsdb.ocnssf\
        -j ocnssf-db-creds \
        -k ocnssfats-nsconfig.ocnssf2410\
        -l ocatsnssf-nrf-stubserver.ocnssf2410\
        -m ocnssfats \
        -n ocatsnssf \
        -o 8081 \
        -p 8080 \
        -q 8080 \
        -r ocnssfats-nsselection.ocnssf2410 \
        -s ocnssfats-nsauditor.ocnssf2410\
```



```

-t ocnssfats-nsavailability.ocnssf2410\
-u ocnssfats-nssubscription.ocnssf2410\
-v ocnssfats-ocnssf-app-info.ocnssf2410\
-w ocnssfats-ocnssf-perf-info.ocnssf2410\
-x 311 480 \

...
if(env.Include_Regression && "${Include_Regression}" ==
"YES"){
    sh '''sh /var/lib/jenkins/common_scripts/
merge_jenkinsfile.sh'''
    load "/var/lib/jenkins/ocnssf_tests/jenkinsData/
Jenkinsfile-Merged"
}
else{
    load "/var/lib/jenkins/ocnssf_tests/jenkinsData/
Jenkinsfile-NewFeatures"
}
}
}

```

- Click **Save** after making necessary changes. The **Pipeline NSSF-NewFeatures** screen appears.

## Running NSSF New Features Test Cases

To run NSSF New Features test cases:

- Click on **Build with Parameters** present on the NSSF-NewFeatures screen in the extreme left column corresponding to NSSF-NewFeatures row as shown below:

**Oracle Communications Cloud Native Core**  
**Automated Test Suite**

**Test Result Trend**

Legend: ● Passed ● Skipped ● Failed

**Stage View**

| Preparation | Execute-Tests | 1st Stage | 1st Stage 1st Group | Logging / Rerun | Archive logs | Consolidated Output | Declarative: Post Actions |
|-------------|---------------|-----------|---------------------|-----------------|--------------|---------------------|---------------------------|
| 3s          | 45ms          | 80ms      | 17min 13s           | 159ms           | 144ms        | 737ms               | 4s                        |

**Build History**

| Build | Status     | Timestamp            |
|-------|------------|----------------------|
| #1    | No Changes | 30-May-2024, 8:02 am |

**Permalinks**

- Last build (#1), 4 hr 4 min ago
- Last stable build (#1), 4 hr 4 min ago
- Last successful build (#1), 4 hr 4 min ago
- Last completed build (#1), 4 hr 4 min ago

2. The following screen appears:

ORACLE

Dashboard > NSSF-NewFeatures >

Status

Changes

Build with Parameters

Configure

Full Stage View

Documentation

HTML Report

Favorite

Open Blue Ocean

Rename

Test Results Analyzer

Pipeline Syntax

Build History

trend

Filter...

30-May-2024, 8:02 am

Atom feed for all

Atom feed for failures

Pipeline NSSF-NewFeatures

This build requires parameters:

Oracle Communications Cloud Native Core

Automated Test Suite - NSSF

EXECUTION OPTIONS

TestSuite

Configuration\_Type

Include\_Regression

NewFeatures

Product\_Config

NO

FEATURES AND TESTCASES

Features

All

Stage: stage1 Group: group1

- NSSF\_AMF\_TrustedListing
- NSSF\_Authorization\_NonTrustedAMF\_NsAvailPUT

TestCases

All

Total Features are: 3 & TestCases are: 55

Stage: stage1 Group: group1



NSSF\_AMF\_TrustedListing

- Validate\_that\_NSSF\_receive\_POST\_request\_to\_configure\_AMF\_whitelist\_
- Validate\_that\_NSSF\_receive\_POST\_request\_to\_configure\_AMF\_whitelist\_
- WhiteListing\_is\_enabled\_and\_PUT\_request\_from\_new\_AMF\_that\_is\_conf
- WhiteListing\_is\_enabled\_and\_PUT\_request\_comes\_in\_multiple\_times\_fr
- Enabling\_enabledWhiteListingAmf\_flag\_via\_systemOptions\_api\_and\_ther
- WhiteListingsEnabled\_OnssaiEnabledPUT\_Scenario02\_PutWithMultiple!
- WhiteListingsEnabled\_OnssaiEnabledPUT\_Scenario04\_RestrictedTA\_For
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_add\_op\_on\_h
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_replace\_op\_o
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_remove\_op\_o
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_add\_op\_on\_h
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_replace\_op\_o
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_remove\_op\_o

- Validate\_that\_NSSF\_receive\_POST\_request\_to\_configure\_AMF\_whitelist\_
- WhiteListing\_is\_enabled\_and\_PUT\_request\_from\_new\_AMF\_that\_is\_conf
- WhiteListing\_is\_enabled\_and\_PUT\_request\_from\_new\_AMF\_that\_is\_conf
- Enabling\_enabledWhiteListingAmf\_flag\_via\_systemOptions\_api
- WhiteListingsEnabled\_OnssaiEnabledPUT\_Scenario01\_SinglePUT\_WithN
- WhiteListingsEnabled\_OnssaiEnabledPUT\_Scenario03\_RestrictedTA\_For
- WhiteListingsEnabled\_OnssaiEnabledPUT\_Scenario05\_RestrictedPlmn\_P
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_remove\_op\_o
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_add\_op\_on\_h
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_replace\_op\_o
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_remove\_op\_o
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_add\_op\_on\_h
- Validate\_NSSF\_supports\_Whitelisted\_PATCH\_request\_with\_replace\_op\_o

In the above screen, there are three **Select\_Option(s)**, which are:

- By default, features 'ALL', configuration type 'Product\_config', include regression 'NO' will be selected, and all test cases will be executed once clicked on BUILD, as shown above.
- Features: ALL. Once you click on ALL, a dropdown 'Select' option will appear. After selecting 'Select,' options will appear to choose feature files. To run the selected feature files, click on 'Build,' as shown below.

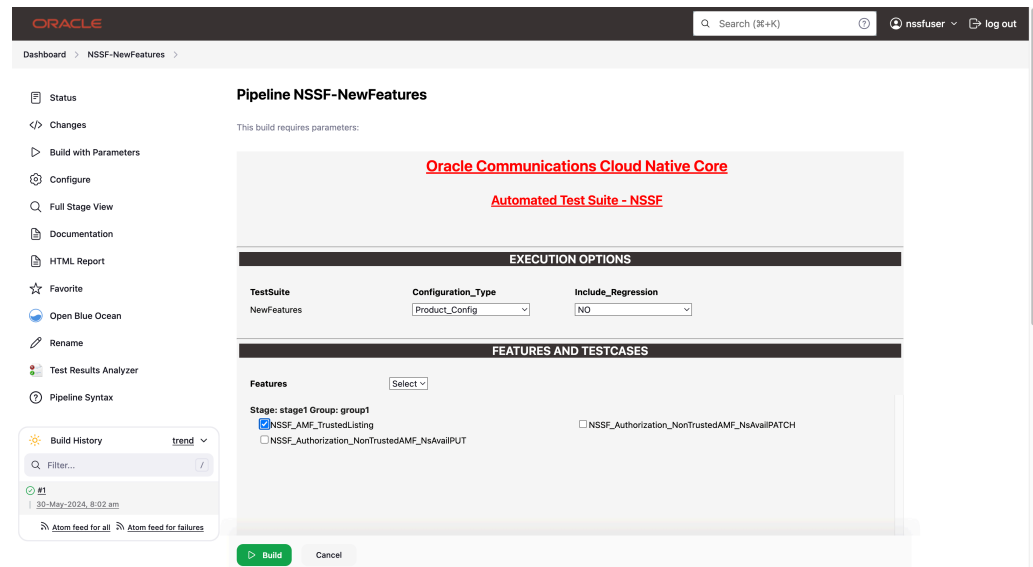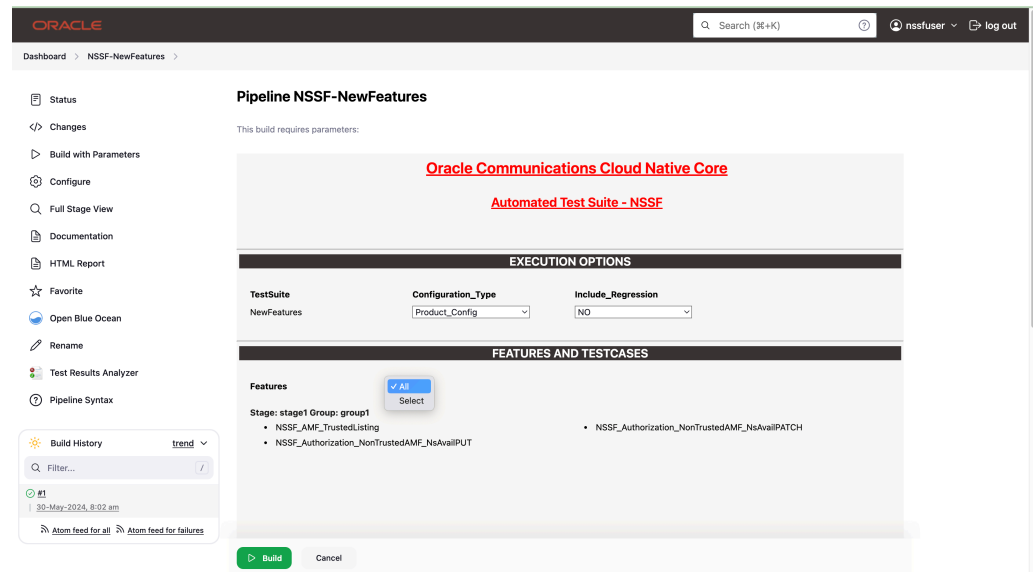


### 3. Select one of the following configuration types:

- **Product\_Config:** On selecting this option, test cases from product folders are populated on ATS UI and product configuration is applied to them via the keyvalue pair and yaml files defined or present in the "Product Config" folder.
- **Custom\_Config:** On selecting this option, test cases from custom folders are populated on ATS UI and custom configuration is applied to them via the keyvalue pair and yaml files defined or present in the "Custom Config" folder. To use the [Parameterization](#) feature, always select the Custom\_Config option. User can copy, add, or delete the required test cases that are available for the NSSF and place them appropriately within the custom folder for NSSF-NewFeatures. Reload the page to view the test cases available in the custom NewFeatures folder. For more information, see Parameterized approach for SUT custom configuration.

The NSSF test cases are divided into NSSF Service operations as follows:

- **AMF\_TrustedListing**- This feature file contains test cases related to Trusted of AMFs and Configuration of NsAvailability PUT request.
- **NSSF\_Authorization\_NonTrustedAMF\_NsAvailPATCH**- This feature file contains test cases related to PATCH request for Update operation of NSSAI Availability in cases of Non Trusted AMFs.
- **NSSF\_Authorization\_NonTrustedAMF\_NsAvailPUT**- This feature file contains test cases related to PUT request for Update operation of NSSAI Availability in cases of Non Trusted AMFs.

If you want to run `custom_config`, select below parameter as `custom_config`, where the framework automatically points out to `custom_config` and `cust_data`.

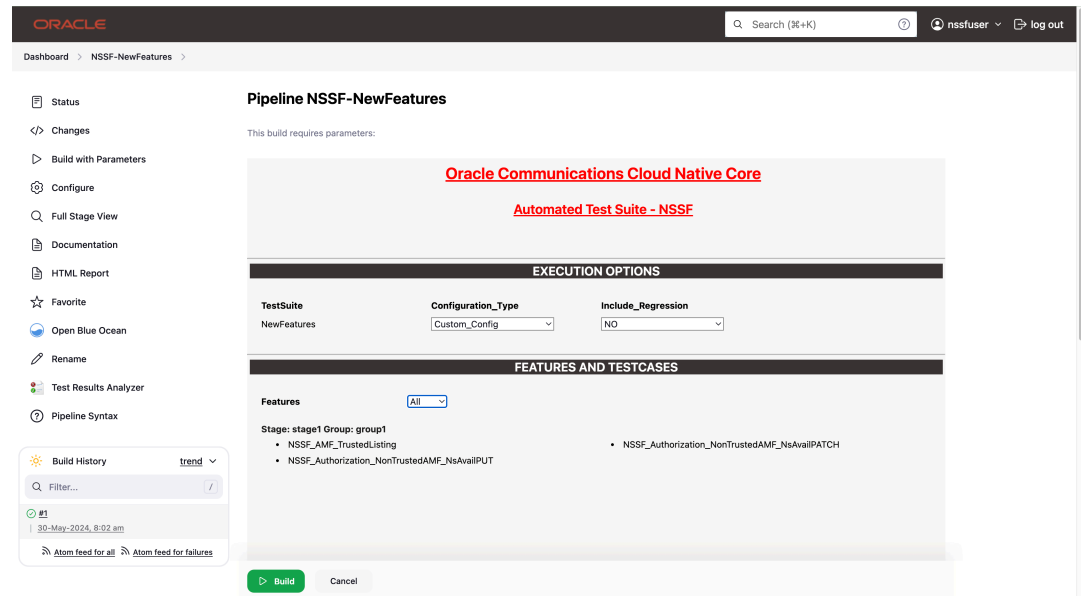

3 features passed, 0 failed, 0 skipped  
 55 scenarios passed, 0 failed, 0 skipped  
 979 steps passed, 0 failed, 0 skipped, 0 undefined  
 Took 17m4.195s

### Parameterized approach for SUT custom configuration

Using this feature, user can make the following customizations to custom folders:

- Add new test cases by adding datafiles
- Remove test cases
- Modify the parameters and their values in the key-value pair or `<feature>.yaml` files

To run ATS test cases, user can maintain as many versions of `Custom_Config` folder by using the following naming convention:

Cust ConfigN

where N can be any number

At the time of execution, ensure to rename the required folder to `Custom Config` folder as Jenkins always retrieves data from this folder when user selects `Custom_Config`.

## Updating Global Parameters

To use Custom\_Config, it is required to change the value of cust\_folder from data to cust\_data in global.yaml file. In addition, you can customize the parameters and their respective values in the global.yaml as per the requirements.

## Updating Feature Parameters

Consider the following points when customizing <feature>.yaml files for parameterized feature:


- In addition to global.yaml parameters, feature files may also contain parameters for which user can update values at the time of running pipelines.
- Changing the values of parameters tagged as "Feature Specific Value" may cause failures at the time of running pipelines.
- Values for parameters tagged with #START\_GLOBAL and #END\_GLOBAL tags take values from global.yaml.

### Note

For NSSF-ATS release 24.2.0, parameterization is supported for NSSF NewFeatures pipeline only.

## 4.4.4 NSSF-NewFeatures Documentation

To view NSSF functionalities, go to **NSSF-NewFeatures** pipeline latest build and click the **Documentation** link in the left navigation pane. The following screen appears. Click any functionality to view its test cases and scenarios of each test case as shown below:

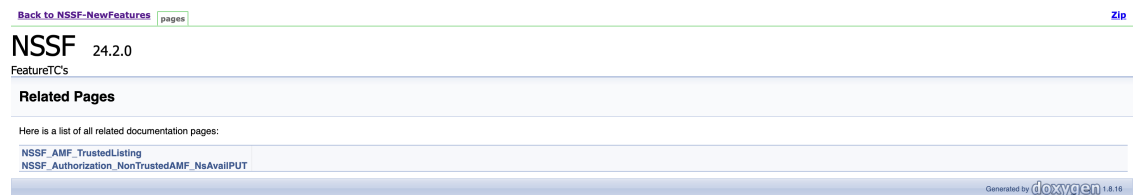

A sample of a few documentation features are as follows:

| <a href="#">Back to NSSF-NewFeatures</a> <a href="#">pages</a> <a href="#">Zip</a>                                                                    |                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| <b>NSSF</b>                                                                                                                                           |                                              |
| <b>NSSF_AMF_TrustedListing</b>                                                                                                                        |                                              |
| <b>NSSF_AMF_TrustedListing.feature</b>                                                                                                                |                                              |
| Description : This feature file is about Trusted of AMFs and Configuration of NsAvailability PUT request                                              |                                              |
| <b>Scenario-1 : Validate_that_NSSF_receive_POST_PUT_request_to_configure_AMF_Trusted_and_be_validated_via_subsequent_GET_request</b>                  |                                              |
| Objective : Validate_that_NSSF_receive_POST_PUT_request_to_configure_AMF_Trusted_and_be_validated_via_subsequent_GET_request                          |                                              |
| Pre-requisite : NSSF is already deployed with latest images and ATS client is up and running.                                                         |                                              |
| Procedure                                                                                                                                             | Expected Result                              |
| 1.) Send POST AMF Set configuration request to nsf                                                                                                    | 1.) Verify successful response 201           |
| 2.) Send POST AMF Set Trusted configuration request to nsf                                                                                            | 2.) Verify successful response 201 with body |
| 3.) Send GET AMF Set Trusted configuration request to nsf                                                                                             | 3.) Verify successful response 200           |
| 4.) Send PUT/GET AMF Set Trusted configuration request to nsf                                                                                         | 4.) Verify successful response 200 with body |
| 5.) Send DELETE AMF Set Trusted configuration request to nsf                                                                                          | 5.) Verify successful response 204           |
| 6.) Send DELETE AMF Set Trusted configuration request to nsf                                                                                          | 6.) Verify response 404                      |
| 7.) Send PUT/GET AMF Set Trusted configuration request to nsf                                                                                         | 7.) Verify successful response 200 with body |
| <b>Scenario-2 : Validate_that_NSSF_receive_POST_Followed_By_POST_request_to_configure_AMF_Trusted_and_be_validated_via_subsequent_GET_request_Neg</b> |                                              |
| Objective : Validate_that_NSSF_receive_POST_Followed_By_POST_request_to_configure_AMF_Trusted_and_be_validated_via_subsequent_GET_request_Neg         |                                              |
| Pre-requisite : NSSF is already deployed with latest images and ATS client is up and running.                                                         |                                              |
| Procedure                                                                                                                                             | Expected Result                              |
| 1.) Send POST AMF Set configuration request to nsf                                                                                                    | 1.) Verify successful response 201           |
| 2.) Send POST AMF Set Trusted configuration request to nsf                                                                                            | 2.) Verify successful response 201           |
| 3.) Send GET AMF Set Trusted configuration request to nsf                                                                                             | 3.) Verify successful response 200           |
| 4.) Send PUT/GET AMF Set Trusted configuration request to nsf                                                                                         | 4.) Verify successful response 200           |
| 5.) Send POST AMF Set Trusted configuration requests to nsf                                                                                           | 5.) Verify response 409                      |
| 6.) Send GET AMF Set Trusted configuration request to nsf                                                                                             | 6.) Verify successful response 200           |

## 4.4.5 NSSF-Regression Pipeline

This pipeline contains test cases from the previous versions.

Some of the test cases are updated as per the new implementation of NSSF.

The configuration method and parameters are the same as the **NewFeatures** pipeline.

The NSSF test cases are divided into NSSF Service operations. The classification is as follows:

- **Availability Update:** These feature files are listed with a prefix as "Update".
- **Configuration:** These feature files are listed with a prefix as "failure".
- **Registration:** These feature files are listed with a prefix as "NsSelection\_Registration".
- **PDU Session:** These feature files are listed with a prefix as "NsSelection\_PDU".
- **SuportedFeatures:** This feature file has Feature Negotiation test cases.
- **subscription\_patch:** This feature file has SUBMOD test cases.
- **eanan:** This feature file has EANAN test cases.
- **TAI Range:** This feature file has TAI Range supported NsAvailability and NsSelection test cases.
- **NSSF\_Sending\_Notification\_via\_ARS\_SCP:** This feature file has test cases related to NRF discovery and subscription.
- **NSSF Sanity:** This feature file contains all the basic sanity cases for NSSF ATS 24.2.0.
- **NSSF\_Allowed\_NSSAI\_computation\_RegUeConf:** This feature file contains test cases related to NSSF Allowed SNSSAI Computation based on enabling and disabling of System Options PLMN based.
- **NSSF\_Allowed\_NSSAI\_computation\_ueconfig\_update:** This feature file contains test cases related to NSSF Allowed SNSSAI Computation based on enabling and disabling of System Options PLMN based.


The screenshot displays the Oracle NSSF-Regression dashboard. The top navigation bar includes the Oracle logo, a search bar, and user information (nssfuser, log out). The left sidebar contains a list of navigation items: Status, Changes, Build with Parameters, Configure, Full Stage View, Documentation, HTML Report, Favorite, Open Blue Ocean, Rename, Test Results Analyzer, and Pipeline Syntax. The main content area is titled "NSSF-Regression" and features a "Test Result Trend" chart showing a single data point for build #1. Below the chart is a "Stage View" table showing the execution times for various stages of the pipeline. The table has columns for Preparation, Execute-Tests, 1st Stage, 1st Stage 1st Group, Logging / Rerun, Archive logs, Consolidated Output, and Declarative: Post Actions. The values for each stage are: Preparation (2s), Execute-Tests (42ms), 1st Stage (91ms), 1st Stage 1st Group (1h 10min), Logging / Rerun (145ms), Archive logs (125ms), Consolidated Output (707ms), and Declarative: Post Actions (4s). Below the table, there is a "Latest Test Result" section indicating no failures, and a "Permalinks" section with links to the last build, last stable build, last successful build, and last completed build.

| Stage  | Preparation | Execute-Tests | 1st Stage | 1st Stage 1st Group | Logging / Rerun | Archive logs | Consolidated Output | Declarative: Post Actions |
|--------|-------------|---------------|-----------|---------------------|-----------------|--------------|---------------------|---------------------------|
| Values | 2s          | 42ms          | 91ms      | 1h 10min            | 145ms           | 125ms        | 707ms               | 4s                        |

- In the above screen:
  - Click **Configure** to access the configuration screen.
  - Click **Documentation** to view the documented test cases.
  - Click blue dots inside the **Build History** box to view the success console logs of the "All" and "Sanity" respectively.
  - The **Stage View** represents the already run pipeline for customer reference.
- Click **Configure**. Users MUST wait for the page to load completely. Once the page loads completely, click the **Pipeline** tab to reach the Pipeline configuration as shown below:

### Warning

Make sure that the screen shown above loads completely before you perform any action on it. Also, do not modify any configuration other than that discussed below.

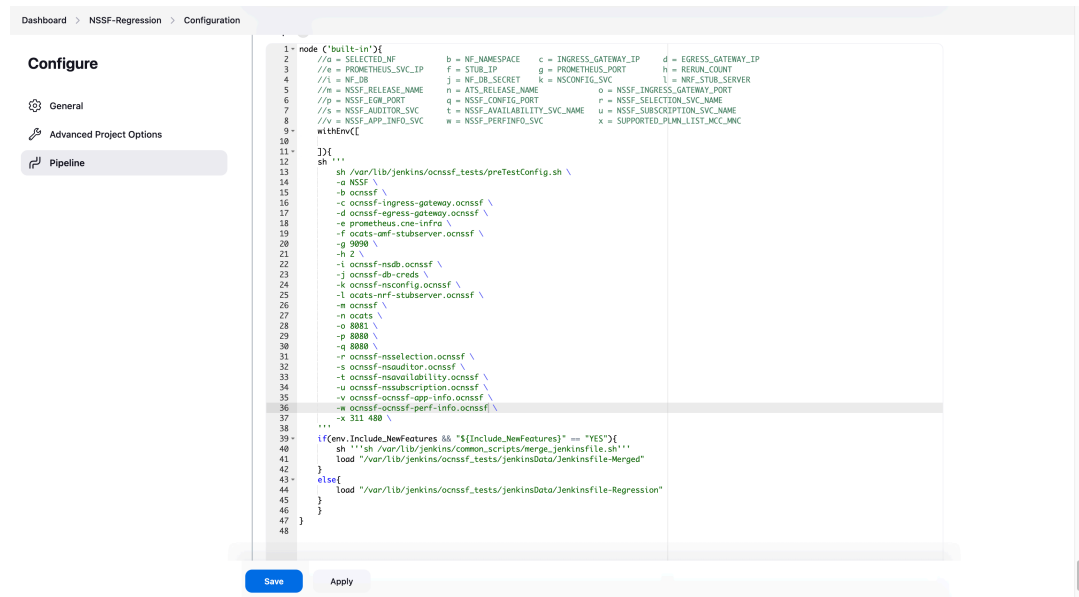

3. You can modify script pipeline parameters from "a" to "w" on the basis of your deployment environment and click Save. The content of the pipeline script is as follows:

```

node('built-in'){
    //a = SELECTED_NF      b = NF_NAMESPACE      c =
INGRESS_GATEWAY_IP      d = EGRESS_GATEWAY_IP
    //e = PROMETHEUS_SVC_IP  f = STUB_IP      g =
PROMETHEUS_PORT      h = RERUN_COUNT
    //i = NF_DB              j = NF_DB_SECRET      k =
NSCONFIG_SVC      l = NRF_STUB_SERVER
    //m = NSSF_RELEASE_NAME  n = ATS_RELEASE_NAME      o =
NSSF_INGRESS_GATEWAY_PORT
    //p = NSSF_EGW_PORT      q = NSSF_CONFIG_PORT      r =
NSSF_SELECTION_SVC_NAME
    //s = NSSF_AUDITOR_SVC   t = NSSF_AVAILABILITY_SVC_NAME  u =
NSSF_SUBSCRIPTION_SVC_NAME
    //v = NSSF_APP_INFO_SVC  w = NSSF_PERFINFO_SVC      x =
SUPPORTED_PLMN_LIST_MCC_MNC
    withEnv([

    ]){
    sh '...'
    sh /var/lib/jenkins/ocnssf_tests/preTestConfig.sh \
    -a NSSF \
    -b ocnssf \
    -c ocnssf-ingress-gateway.ocnssf \
    -d ocnssf-egress-gateway.ocnssf \
    -e prometheus.cne-infra \
    -f ocats-amf-stubserver.ocnssf \
    -g 9090 \
    -h 2 \
    -i ocnssf-nsdb.ocnssf \
    -j ocnssf-db-creds \
    -k ocnssf-nsconfig.ocnssf \
    -l ocats-nrf-stubserver.ocnssf \

```



```

        -m ocnsf \
        -n ocats \
        -o 8081 \
        -p 8080 \
        -q 8080 \
        -r ocnsf-nsselection.ocnsf \
        -s ocnsf-nsauditor.ocnsf \
        -t ocnsf-nsavailability.ocnsf \
        -u ocnsf-nssubscription.ocnsf \
        -v ocnsf-ocnsf-app-info.ocnsf \
        -w ocnsf-ocnsf-perf-info.ocnsf \
        -x 311 480 \
    ...
    if(env.Include_NewFeatures && "${Include_NewFeatures}" == "YES"){
        sh '''sh /var/lib/jenkins/common_scripts/merge_jenkinsfile.sh'''
        load "/var/lib/jenkins/ocnsf_tests/jenkinsData/Jenkinsfile-Merged"
    }
    else{
        load "/var/lib/jenkins/ocnsf_tests/jenkinsData/Jenkinsfile-
Regression"
    }
}
}

```

**Note**

The User MUST NOT change any other value apart from these parameters.

The description of these parameters is as follows:

- a: Name of the NF to be tested in capital (NSSF).
- b: Namespace in which the NSSF is deployed (default is ocnsf)
- c: Ingress Gateway IP address (default is ocnsf-ingress-gateway.ocnsf)
- d: Egress Gateway IP address (default is ocnsf-egress-gateway.ocnsf)
- e: Prometheus service IP address (default is prometheus.cne-infra)
- f: Stub service IP address (default is ocats-amf-stubserver.ocnsf)
- g: Port of Prometheus service (default is 80)
- h: Number of times the re-run of failed case is allowed (default is 2).
- i: Database name (default is ocnsf-nsdb.ocnsf)
- j Database secrets (default ocnsf-db-creds)
- k: NSSF config ip address (ocnsf-nsconfig.ocnsf)
- l: NRF stub server IP address (ocats-nrf-stubserver.ocnsf)
- m: NSSF release name (ocnsf)
- n: ATS release name (ocats)
- o: NSSF Ingress Gateway Port
- p: NSSF Egress Gateway Port

- q: NSSF Config Port
- r: NSSF Selection Service Name
- s: NSSF Auditor Service Name
- t: NSSF Availability Service Name
- u: NSSF Subscription Service Name
- v: APP Info Service Name
- w: Perf info Service Name
- x: NSSF Supported PLMN

**Note**

- Do not change any value if the OCCNE cluster is used, and NSSF, ATS, and STUB are deployed in the ocnssf namespace.
- In the above image, the NSSF Helm Release Name is "ocnssf", ATS Helm Release Name is "ocats", and Namespace is "ocnssf". If any change in the helm release name of NSSF, ATS, and namespace needs to be updated accordingly.
- For example, if the NSSF Helm Release Name is "ocnssfats" and ATS Helm Release Name is "ocatsnssf", and Namespace is "ocnssf2410", then the above Pipeline Configuration should be edited as shown below:
  - NSSF Helm Release Name should be updated in "c d i k m r s t u v w" if any change in NSSF helm release name apart from "ocnssf".
  - ATS Helm Release Name should be updated in "f l n" if any change in ATS Helm Release Name apart from "ats".

```
node ('built-in'){
  //a = SELECTED_NF          b = NF_NAMESPACE      c =
INGRESS_GATEWAY_IP        d = EGRESS_GATEWAY_IP
  //e = PROMETHEUS_SVC_IP    f = STUB_IP          g =
PROMETHEUS_PORT           h = RERUN_COUNT
  //i = NF_DB                j = NF_DB_SECRET      k =
NSCONFIG_SVC              l = NRF_STUB_SERVER
  //m = NSSF_RELEASE_NAME    n = ATS_RELEASE_NAME  o
= NSSF_INGRESS_GATEWAY_PORT
  //p = NSSF_EGW_PORT        q = NSSF_CONFIG_PORT  r
= NSSF_SELECTION_SVC_NAME
  //s = NSSF_AUDITOR_SVC     t = NSSF_AVAILABILITY_SVC_NAME u
= NSSF_SUBSCRIPTION_SVC_NAME
  //v = NSSF_APP_INFO_SVC    w = NSSF_PERFINFO_SVC  x
= SUPPORTED_PLMN_LIST_MCC_MNC
  withEnv([

  ]){
    sh '''
      sh /var/lib/jenkins/ocnssf_tests/preTestConfig.sh \
      -a NSSF \
      -b ocnssf2410\
      -c ocnssfats-ingress-gateway.ocnssf2410\
      -d ocnssfats-egress-gateway.ocnssf2410\
      -e prometheus.cne-infra \
      -f ocatsnssf-amf-stubserver.ocnssf2410\
      -g 9090 \
      -h 2 \
      -i ocnssfats-nsdb.ocnssf\
      -j ocnssf-db-creds \
      -k ocnssfats-nsconfig.ocnssf2410\
      -l ocatsnssf-nrf-stubserver.ocnssf2410\
      -m ocnssfats \
      -n ocatsnssf \
      -o 8081 \
      -p 8080 \
      -q 8080 \
    '''
  }
}
```

```

-r ocnssfats-nsselection.ocnssf2410 \
-s ocnssfats-nsauditor.ocnssf2410\
-t ocnssfats-nsavailability.ocnssf2410\
-u ocnssfats-nssubscription.ocnssf2410\
-v ocnssfats-ocnssf-app-info.ocnssf2410\
-w ocnssfats-ocnssf-perf-info.ocnssf2410\
-x 311 480 \

...
if(env.Include_Regression && "${Include_Regression}" == "YES"){
    sh '''sh /var/lib/jenkins/common_scripts/
merge_jenkinsfile.sh'''
    load "/var/lib/jenkins/ocnssf_tests/jenkinsData/Jenkinsfile-
Merged"
}
else{
    load "/var/lib/jenkins/ocnssf_tests/jenkinsData/Jenkinsfile-
Regression"
}
}
}

```

- Click **Save** after making necessary changes. The **Pipeline NSSF-Regression** screen appears.

### NSSF-Regression - Build with Parameters

The screenshot displays the 'Pipeline NSSF-Regression' configuration interface. At the top, it says 'This build requires parameters:'. Below this, there are two main sections: 'EXECUTION OPTIONS' and 'FEATURES AND TESTCASES'.

**EXECUTION OPTIONS:**

- TestSuite:** Regression
- Configuration\_Type:** Product\_Config (selected from a dropdown)
- Include\_NewFeatures:** NO (selected from a dropdown)

**FEATURES AND TESTCASES:**

**TestCases:** All (selected from a dropdown)



**Stage: stage1 Group: group1**

- AMF\_Autopopulating\_Config\_NSAavailability\_PUT
- Ue\_Registration\_AMF\_Autopopulate
- MappingofNssai\_MO\_RestAPI
- positive\_indirect\_communication
- NSSF\_Allowed\_NSSAI\_computation\_RegUeConf
- NSSF\_AutoPopulating\_NRFContent
- NSSF\_IQW\_Pod\_Protection
- NSSF\_OAuth\_Response\_Header
- NSSF\_Sending\_Notification\_via\_ARS\_SCP
- NSSF\_Get\_AMF\_Subscriptions
- NssfConfIn\_Dns
- Subscription\_Notification\_Availability\_Put
- UnsupportedPLMN\_NSAavailability\_PUT
- negative\_indirect\_communication
- MultiplePLMN
- NSSF\_Allowed\_NSSAI\_computation\_ueconfig\_update
- NSSF\_DeleteOnSubscriptionNotFound
- Metric\_DefaultNssai
- NSSF\_SCP\_Monitoring\_OPTIONS
- NSSF\_Server\_Header
- NSSF\_User\_Agent\_Header
- nssf\_cat

At the bottom, there are 'Build' and 'Cancel' buttons.

- By default, features "ALL," configuration type "Product\_config," and include new features "NO" will be selected. All test cases will be executed once you click on BUILD, as shown above.

- Features: ALL. Once you click on ALL, a dropdown "Select" option will appear. After selecting the "Select" option, as shown below, options will appear to select feature files. To run the selected feature files, click on "Build," as shown below.

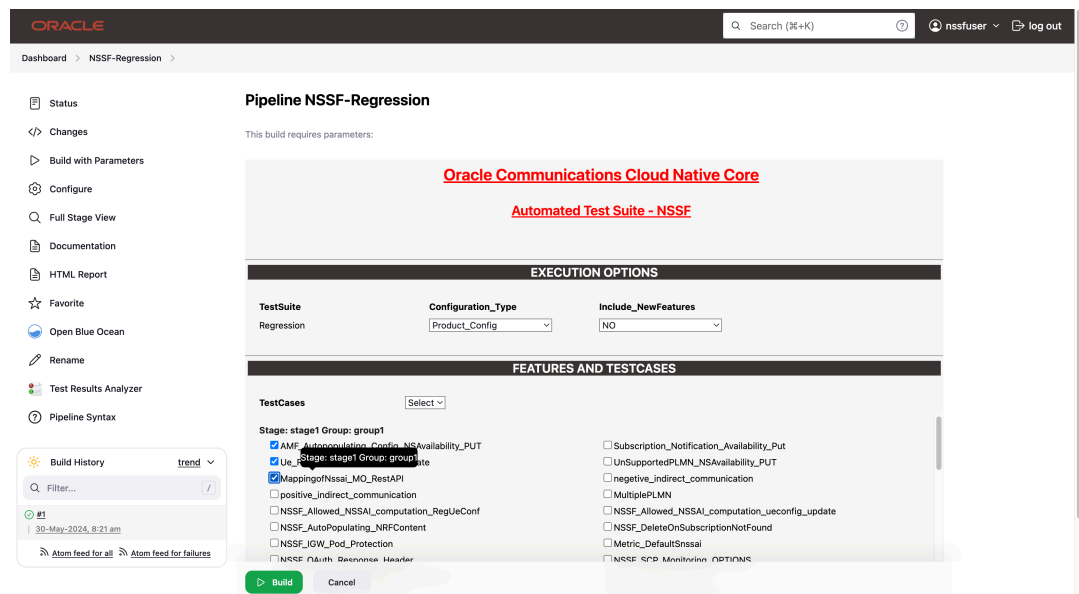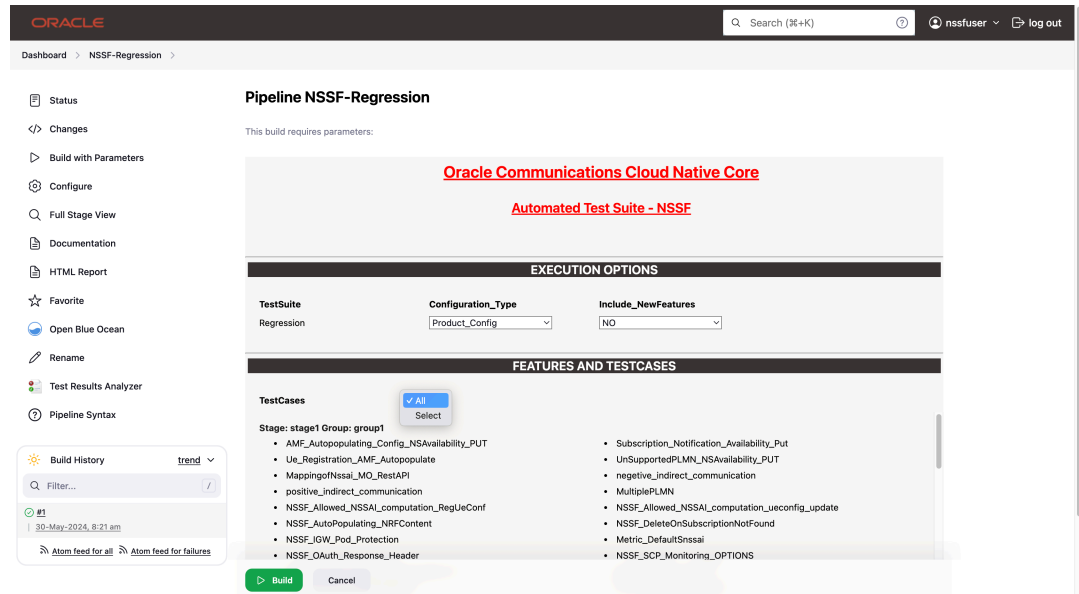

76 features passed, 0 failed, 0 skipped  
 730 scenarios passed, 0 failed, 0 skipped  
 8361 steps passed, 0 failed, 0 skipped, 0 undefined  
 Took 67m18.912s

## 4.4.6 NSSF-Regression Documentation

To view NSSF Regression cases, go to **NSSF-Regression** latest pipeline build and click the **Documentation** link in the left navigation pane. The following screen appears. Click any functionality to view its test cases and scenarios of each test case as shown below:

[Back to NSSF-Regression](#) [pages](#) [Zip](#)

### NSSF

#### Related Pages

Here is a list of all related documentation pages:

|                                                      |  |
|------------------------------------------------------|--|
| MappingOfNssai_MO_RestAPI                            |  |
| NsSelection_Registration_EPS_to_5G_Handover          |  |
| PlmnLevelNSIPProfile                                 |  |
| Ue_Registration_AMF_Autopopulate                     |  |
| AMF_Autopopulation_Configuration_NSAavailability_PUT |  |
| NSSF_AutoPopulating_NRFContent                       |  |
| nssf_OAuth_INSTANCEIDToken                           |  |
| NSSF_AVAILABILITY_PATCH_AND_NEGATIVE_CASES           |  |
| NSSF_BASIC_SANITY_CASES                              |  |
| NSSF_BASIC_SUBSCRIBE_CASES                           |  |
| NSSF_BASIC_UPDATE_CASES                              |  |
| NSSF_CONFIG_CASES                                    |  |
| NSSF_NsSelection_Failure_CASES                       |  |
| NSSF_NsSelection_PDU_CASES                           |  |
| NSSF_NsSelection_Registration_CASES                  |  |
| NSSF_IndirectComm_Negative_CASES                     |  |
| NSSF_IndirectComm_Positive_CASES                     |  |
| NSSF_MultiplePLMN_CASES                              |  |
| NSSF_EANAN_CASES                                     |  |
| NSSF_SUBS_PATCH_CASES                                |  |
| NsSelection_Registration_TaiRange                    |  |
| NsSubscription_Notification_TaiRange                 |  |
| NsAvailability_Put_TacRange                          |  |
| NsAvailability_Subscription_TacRange                 |  |
| NsSelection_PDU_TaiRange                             |  |
| NSSF_Server_Header                                   |  |
| NSSF_User_Agent_Header                               |  |
| NSSF_Allowed_NSSAI_computation                       |  |

Generated by  1.8.15

A sample of a few documentation features are as follows:

[Back to NSSF-Regression](#) [pages](#) [Zip](#)

### NSSF

#### NSSF\_User\_Agent\_Header

##### NSSF\_User\_Agent\_Header.feature

**Description :** This feature file validates the User-Agent headers based on the feature Enabled/Disabled

**Scenario-1 : If User-Agent feature is enabled, and overwrite is enabled, oc\_egressgateway\_user\_agent\_consumer metric with consumerInstanceid as a dimension should be pegged**

**Objective :** Validate oc\_egressgateway\_user\_agent\_consumer\_total metric when User-Agent feature is enabled, and overwrite is enabled.

**Pre-requisite :** NSSF is already deployed with latest images and ATS client is up and running.

| Procedure                                                                                            | Expected Result                           |
|------------------------------------------------------------------------------------------------------|-------------------------------------------|
| 1.) Perform Agent Support Configuration by Configuration PUT request to NSSF                         | 1.) Verify successful response            |
| 2.) Perform Configuration by setting http response to 201 for notification in amf-stub server        | 2.) Verify successful response            |
| 3.) Perform subscription Configuration by sending create subscription request to NSSF                | 3.) Verify successful response            |
| 4.) Perform Snsai Auth Configuration by sending create Auth configuration request to NSSF            | 4.) Verify successful response 201        |
| 5.) Perform Fetch HTTP messages from amf stub server                                                 | 5.) Verify successful response            |
| 6.) Perform Fetch User-agent header from amf stub server                                             | 6.) Verify successful response            |
| 7.) Perform Post Fetch metrics for oc_egressgateway_user_agent_consumer_total                        | 7.) Validate with successful metric count |
| 8.) Perform Agent Support Configuration for disable the feature by Configuration PUT request to NSSF | 8.) Verify successful response            |

**Scenario-2 : If User-Agent feature is disabled, oc\_egressgateway\_user\_agent\_consumer metric shouldn't be pegged.**

**Objective :** Validate oc\_egressgateway\_user\_agent\_consumer\_total metric when User-Agent feature is disabled, and overwrite is enabled.

**Pre-requisite :** NSSF is already deployed with latest images and ATS client is up and running.

| Procedure                                                                                     | Expected Result                    |
|-----------------------------------------------------------------------------------------------|------------------------------------|
| 1.) Perform Agent Support Configuration by Configuration PUT request to NSSF                  | 1.) Verify successful response     |
| 2.) Perform Configuration by setting http response to 201 for notification in amf-stub server | 2.) Verify successful response     |
| 3.) Perform subscription Configuration by sending create subscription request to NSSF         | 3.) Verify successful response     |
| 4.) Perform Snsai Auth Configuration by sending create Auth configuration request to NSSF     | 4.) Verify successful response 201 |
| 5.) Perform delete http response for notification in amf-stub server                          | 5.) Verify successful response     |

## 4.5 Running Policy Test Cases using ATS

This section describes how to run CNC Policy test cases using ATS.

For this ATS-Policy release, scenarios or test cases are included for the following three deployment modes:

- Converged Policy
- PCF only for both TLS enabled (server side) and disabled mode
- PCRF only

### Note

Restart the NRF-client pod of CNC Policy for UDR and CHF discovery as part of each test case.

### 4.5.1 Prerequisites

#### PCF only deployment

To run CNC Policy test cases in PCF mode, ensure that the following prerequisites are met:

- Deploy CNC Policy 24.2.7 with default helm configurations using helm charts to run all test cases. The ATS version must be compatible with CNC Policy 24.2.7. For more information on how to install CNC Policy, see *Oracle Communications Cloud Native Core Policy Installation, Upgrade and Fault Recovery Guide*.
- For running ATS features for optional services such as LDAP, Notifier, and Usage Monitoring, ensure that the respective service is enabled on CNC Policy. If this service is not enabled, the test case for this feature will fail.
- For running SOAP notification service, ensure that the SOAP connector service is enabled on CNC Policy. If this service is not enabled, the test case for this feature will fail.
- For using Controlled Shutdown feature, ensure that enableControlledShutdown parameter is enabled on CNC Policy. If this parameter is not enabled, the test case for this feature will fail.
- Install `py-stub`, `ocamf-stub`, `ocdns-bind stub`, and `oc-ldap stub` for Converged Policy and PCF deployment modes.
- Ensure there is a single pod for each microservice in the CNC Policy deployment for ATS Prometheus metrics validation to work.
- Users can add new test cases, remove unwanted test cases, and modify existing test cases in the custom test case folders (**cust\_newfeatures**, **cust\_regression**, and **cust\_performance**). It does not impact the original test cases packaged with the product under newfeatures, regression, and performance folders. For more details about custom test case folders, see [Custom Folder Implementation](#).
- The ATS prometheus metrics validation works only when:
  - the metrics suffixes are not configured
  - installation has a single pod for each microservice in the BSF deployment

- For PRE and Policy\_addition timer, Update PRE deployment to reduce the value of POLLING\_INTERVAL from 10s to 5s and POLLING\_INTERVAL\_POLICYTABLE from 30s to 10s.

**Figure 4-40 PRE and Policy\_addition timer**

```
[cloud-user@platform-bastion-1 ~]$ kubectl get deploy -n ocpcf | grep 'pre'
ocpcf-ocpm-pre          1/1      1          1          10h
```

Run the following command to reduce the value of polling deployment:

```
[cloud-user@platform-bastion-1 ~]$ kubectl edit deploy ocpcf-ocpm-pre -n ocpcf
```

- The following deployment is displayed:

**Figure 4-41 POLLING\_INTERVAL and POLLING\_INTERVAL\_POLICYTABLE Deployment**

```
- name: POLLING_INTERVAL
  value: "5000"
- name: POLLING_INTERVAL_POLICYTABLE
  value: "10000"
```

#### Note

The value of POLLING\_INTERVAL can be updated to 5000 and POLLING\_INTERVAL\_POLICYTABLE to 10000 if it is not updated.

For the policy\_additon timer, the following changes have been made in the config.xml file for NewFeatures, Performance, and Regression.

**Figure 4-42 Policy Addition Timer**

```
//a = SELECTED_INF      b = PCF_NAMESPACE      c = PROMSVCS_NAME      d = GOSTUB_NAMESPACE
//e = SECURITY           f = PCF_NFINSTANCE_ID    g = POD_RESTART_TIME   h = POLICY_TIME
//i = NF_NOTIF_TIME      j = RERUN_COUNT      k = INITIALIZE_TEST_SUITE l = STUB_RESPONSE_TO_BE_SET
//m = POLICY_CONFIGURATION_ADDITION  n = POLICY_ADDITION    o = NEXT_MESSAGE
//p = PROMSVCSIP         q = PROMSVCS_PORT     r = TIME_INT_POD_DOWN   s = POD_DOWN_RETRIES
//t = TIME_INT_POD_UP     u = POD_UP_RETRIES    v = ELK_WAIT_TIME       w = ELK_HOST
//x = ELK_PORT           y = STUB_LOG_COLLECTION z = LOG_METHOD  A = enable_snapshot B = svc_cfg_to_be_read C = PCF_API_ROOT
```

For every SUT, change the of value of -n from 15 to 7, as follows:



**Figure 4-43 Change in SUT Value**

```

-k 0 \
-l 1 \
-m 1 \
-n 7 \
-o 1 \
-p occne-prometheus-
-q 80\
-r 30\
-

```

- In the application-config configmap, configure the following parameters with the respective values:
  - Set the value of primaryNrfApiRoot as  
primaryNrfApiRoot=nf1stub.<namespace\_pystubs\_are\_deployed\_in>.svc:8080.  
For example:  
primaryNrfApiRoot=nf1stub.ocats.svc:8080
  - Remove secondaryNrfApiRoot.  
For example: secondaryNrfApiRoot=nf1stub.ocats.svc:8080
  - Set the value of nrfClientSubscribeTypes to UDR, CHF, NWDAF.
  - Remove supportedDataSetId.  
For example: supportedDataSetId=POLICY

**Note**

These values can also be configured during Policy deployment.  
Run the following command to get all configmaps in your namespace:  
kubectl get configmaps -n <Policy\_namespace>

- Before running Policy test cases using ATS, restart nrf-client-nfdiscovery and nrf-client-nfmanagement pods.
- Edit the Alternate Route Service deployment pointing towards DNS Stub.
- 1. Run the following command to get searches information from dns-bind pod to enable communication between Alternate Route and dns-bind service:

```

kubectl exec -it <dns-bind pod> -n <NAMESPACE> -- /bin/bash -c
'cat /etc/resolv.conf' | grep search | tr ' ' '\n' | grep -v 'search'

```

The following output is displayed after running the command:

**Figure 4-44 Sample Output**

```

[flanders@bastion-1 ~]$ kubectl exec -it ocdns-stub-ocdns-bind-7467cf56c8-5d9q2 -n flanders-ns -- /bin/bash -c 'cat /etc/resolv.conf' | grep search | tr
' ' '\n' | grep -v 'search'
flanders-ns.svc.inferno.lab.us.oracle.com
svc.inferno.lab.us.oracle.com
inferno.lab.us.oracle.com

```

By default alternate service will point to CoreDNS and you will see following settings in deployment file:

**Figure 4-45 Alternate Route Service Deployment File**

```
terminationMessagePolicy: File
dnsPolicy: ClusterFirst
restartPolicy: Always
```

2. Run the following command to edit the deployment file and add the following content in alternate service to query DNS stub:

```
$kubectl edit deployment ocpcf-occpn-alternate-route -n ocpcf
```

- a. Add the IP Address of the nameserver that you have recorded after installing the DNS stub (cluster IP Address of DNS Stub).
- b. Add the search information one by one which you recorded earlier.
- c. Set dnsPolicy to "None".

```
dnsConfig:
  nameservers:
    - 10.233.33.169      // cluster IP of DNS Stub
  searches:
    - ocpcf.svc.occne15-ocpcf-ats
    - svc.occne15-ocpcf-ats
    - occne15-ocpcf-ats
dnsPolicy: None
```

For example:

**Figure 4-46 Example**

```
terminationMessagePath: /dev/termination-log
terminationMessagePolicy: File
dnsConfig:
  nameservers:
    - 10.233.31.245
  searches:
    - flanders-ns.svc.inferno.lab.us.oracle.com
    - svc.inferno.lab.us.oracle.com
    - inferno.lab.us.oracle.com
dnsPolicy: None
restartPolicy: Always
schedulerName: default-scheduler
```

### PCRF only deployment

To run CNC Policy test cases in PCRF mode, ensure that the following prerequisites are met:

- Run the following command to set the log level to Debug in Diam-GW statefulset:

```
kubectl edit statefulset <diam-gw statefulset name> -n <namespace>
```

```
name: LOGGING_LEVEL_APP
```

```
value: DEBUG
```

- Set the peer Configuration using configuration map for backend peers. Edit and set the default configuration of Diameter peer in the diam configuration map and set responseOnly flag to true.

```
kubectl edit cm oc-diam-gateway-config-peers -n <namespace>
```

```
nodes:
```

```
- name: 'ocpcf-occp-pcrf-core'
  type: 'pcrf'
  responseOnly: true
  host: ocpcf-occp-pcrf-core-headless
  port: 3868
  realm: ''
  identity: ''
```

### Converged mode deployment

To run CNC Policy test cases in Converged mode, ensure that the following prerequisites are also met:

- Deploy CNC Policy 24.2.7 with default helm configurations using helm charts to run all test cases. The ATS version must be compatible with CNC Policy 24.2.7. For more information on how to install CNC Policy, see *Oracle Communications Cloud Native Core Policy Installation and Upgrade Guide*.
- For running ATS features for optional services such as LDAP, Notifier, and Usage Monitoring, ensure that the respective service is enabled on CNC Policy.
- Install Prometheus server in cluster.
- Database cluster should be in a running state with all the required tables. Ensure there are no previous entries in database before executing test cases.
- Deploy ATS in the same namespace as Policy using Helm Charts.
- User must not initiate a job in two different pipelines at the same time.
- The installation should have only one pod for each microservice related to ATS Prometheus Metrics validation to work in the CNC Policy deployment.
- If Service Mesh check is enabled, apply the below settings:  
For fetching the metrics from the Prometheus, create a destination rule. In most deployments, Prometheus is kept outside of the service mesh. Hence, a destination rule is required to communicate between TLS enabled entity (ATS) and non-TLS entity (Prometheus). Created the rule as follows:

```
kubectl apply -f - <<EOF
```

```
apiVersion: networking.istio.io/v1alpha3
kind: DestinationRule
metadata:
  name: prometheus-dr
  namespace: ocats
spec:
  host: oso-prometheus-server.pcf.svc.cluster.local
  trafficPolicy:
    tls:
```

```
mode:DISABLE
EOF
```

Here,

- 1.) name, indicates the name of destination rule.
- 2.) namespace, indicates where the ATS is deployed.
- 3.) host, this indicates the hostname of the prometheus server.

- For running ATS features for Model D Indirect Communication Model, ensure that the custom values yaml of CNC Policy has the following parameters with the specified values:

```
routeConfigMode: REST
configureDefaultRoute: true
```

- Update the occnp-servicemesh-config-custom-values-24.2.7.yaml of CNC Policy with the following virtualService configuration for Egress Gateway:

```
virtualService:
# - name: nrftvirtual1
#   host: ocpf-occp-egress-gateway
#   destinationhost: ocpf-occp-egress-gateway
#   port: 8000
#   exportTo: |-
#     [ "." ]
#   attempts: "0"
```

- Restart the ocpm-ldap-gateway pod manually before running the LDAP-specific ATS test cases.
- To ensure the consistent functioning of ATS related to the audit service, modify the audit deployment by reducing the value of AUDIT\_NOTIFY\_SCHEDULER\_POLLING\_INTERVAL\_MILLISEC from 30000 to 1000 (changing from 30 seconds to 1 second).

```
$ kubectl get deploy -n ocpf | grep 'audit' ocpf-ocpm-audit-service
1/1      1      1      10h
```

```
$ kubectl edit deploy ocpf-ocpm-audit-service -n ocpf
```

The deployment will open. Scroll down until below fields are seen.

```
- name: AUDIT_NOTIFY_SCHEDULER_POLLING_INTERVAL_MILLISEC value: "30000"
```

Update the value of AUDIT\_NOTIFY\_SCHEDULER\_POLLING\_INTERVAL\_MILLISEC to 1000 if it isn't already.

**Note**

In order to run stage2 or stage3 cases using configuration\_type of custom\_config, replace the "data" folder with "cust\_data" folder in stage<x>.txt under /var/lib/jenkins/ocpcf\_tests/cust\_data/common/stage\_hooks/stage<x>. directory.

## 4.5.2 Logging into ATS

Before logging into ATS GUI, it is important to get the nodeport of the service, 'ocats-Policy'.

To get the nodeport, perform the following steps:

```
kubectl get svc -n <Policy_namespace>
```

**Example:**

```
kubectl get svc -n ocpcf
```

The output of the command is:

|                 |              |              |              |
|-----------------|--------------|--------------|--------------|
| ocats-ocats-pcf | LoadBalancer | 10.233.56.56 | 10.75.225.49 |
| 8080:31944/TCP  | 19h          |              |              |

To log in to ATS, open the web browser and type the following URL:

`http://<Worker-Node-IP>:<Node-Port-of-ATS>`

If the ocats-policy Service has an external IP available, <SVC external IP> can also be used to log in to ATS.

`http://<SVC external IP>:8080`

**Example:** `http://10.75.225.49:8080`

**Running ATS**

To run ATS test cases, perform the following steps:

1. Enter the **username** as policyuser and **password** as policypasswd.
2. Click **Sign in**.

**Note**

To modify default login password, see [Modifying Login Password](#).

The following page appears showing policy pre-configured pipelines:

**Figure 4-47 Pre-configured Pipelines**

The screenshot displays the Oracle Communications Cloud Native Core Automated Test Suite (CNCATS) dashboard. The top navigation bar includes 'Dashboard', 'New Item', 'Build History', 'My Views', and 'Open Blue Ocean'. The main header indicates 'Oracle Communications Cloud Native Core' and 'Automated Test Suite' with the version 'CNCATS POLICY : 24.2.0'. On the left, there are sections for 'Build Queue' (showing 'No builds in the queue.') and 'Build Executor Status' (showing a build for 'Policy-Regression' in the '#1 (1st Stage 1st Group)'). The main area features a table of pre-configured pipelines:

| S   | W | Name               | Last Success | Last Failure | Last Duration | F   |
|-----|---|--------------------|--------------|--------------|---------------|-----|
| ... | ☀ | Policy-HealthCheck | N/A          | N/A          | N/A           | ▶ ☆ |
| ... | ☀ | Policy-NewFeatures | N/A          | N/A          | N/A           | ▶ ☆ |
| ... | ☀ | Policy-Regression  | N/A          | N/A          | N/A           | ▶ ☆ |

At the bottom, there are filters for 'Icon: S M L' and a '...' menu icon.

The description of each pipeline is as follows:

- **Policy-HealthCheck:** This pipeline checks if CNC Policy and ATS are deployed correctly. This shows only when the user has enabled this feature at the time of installing CNC Policy ATS.
- **Policy-NewFeatures:** This pipeline has all the new test cases delivered for CNC Policy 24.2.7.
- **Policy-Regression:** This pipeline has all the test cases delivered in Policy ATS - 24.1.0.
- **Policy-Performance:** This pipeline is not operational as of now. It is reserved for future releases of ATS.


### 4.5.3 Running Policy-HealthCheck Pipeline

This is a pre-configured pipeline where ATS performs a test probe with SUT. It triggers helm test & provides the results in Jenkins Console Logs.

You can run Policy-HealthCheck pipeline to check if all CNC Policy pods are up and running. If yes, it provides the status as successful. If any pod is down due to any reason, then the pipeline fails.

To configure the parameters for **Policy-HealthCheck** pipeline, perform the following steps:

1. Click **Policy-HealthCheck** in the **Name** column.
2. Click **Configure** in the left navigation pane.
3. When you scroll-down, the **General** tab becomes active. Be sure that the screen loads completely.
4. Continue scrolling down until the **Pipeline** tab becomes active. The following is a screen capture that shows the Pipeline script:

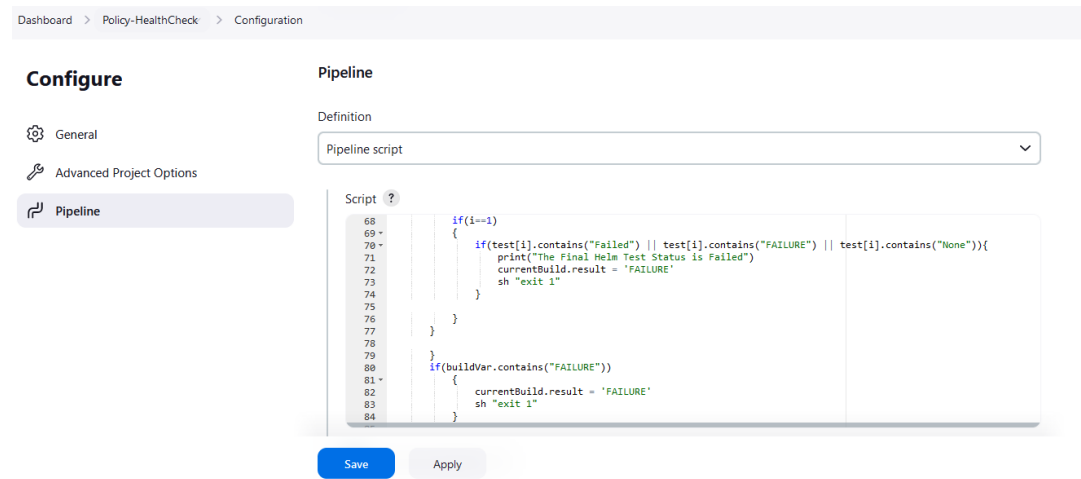**Figure 4-48 Helm Test Script**

- In the **Script** area under the Pipeline section, users may customize the values for the following parameters:

**NOT\_SUPPORTED**

Do not modify values of parameters other than the ones described in this section.

- a:** Change this parameter to update the helm release name where Policy is deployed in your bastion.
  - b:** Change this parameter to update the namespace where Policy is deployed in your bastion.
- Click **Save** to update the values.

**Running Helm Test**

To run CNC Policy test cases, click **Build Now**.

## 4.5.4 Running Policy-NewFeatures Pipeline

**Policy-New Features Pipeline**

This is a pre-configured pipeline where all the Policy new test cases are executed.

To configure the parameters for **Policy-NewFeatures** pipeline, perform the following steps:


**Note**

Configuring the parameters is a one-time activity.

- Click **Policy-NewFeatures** in the **Name** column.
- Click **Configure** in the left navigation pane.
- When you scroll-down, the **General** tab becomes active. Be sure that the screen loads completely.

4. (Optional) If you want to retain a specified number of builds in the persistent volume, select the check box for **Discard old Builds**. It is recommended to configure this option; otherwise, Persistent Volume may fail when the builds are exceedingly high. Enter values for the following parameters:
  - **Days to keep builds**: Specifies the number of days for which build records are stored.
  - **Max # of builds to keep**: Specifies the number of build records to store.
5. Continue scrolling down until the **Pipeline** tab becomes active. The following is a screen capture that shows the Pipeline script:

Figure 4-49 Policy Pipeline Script

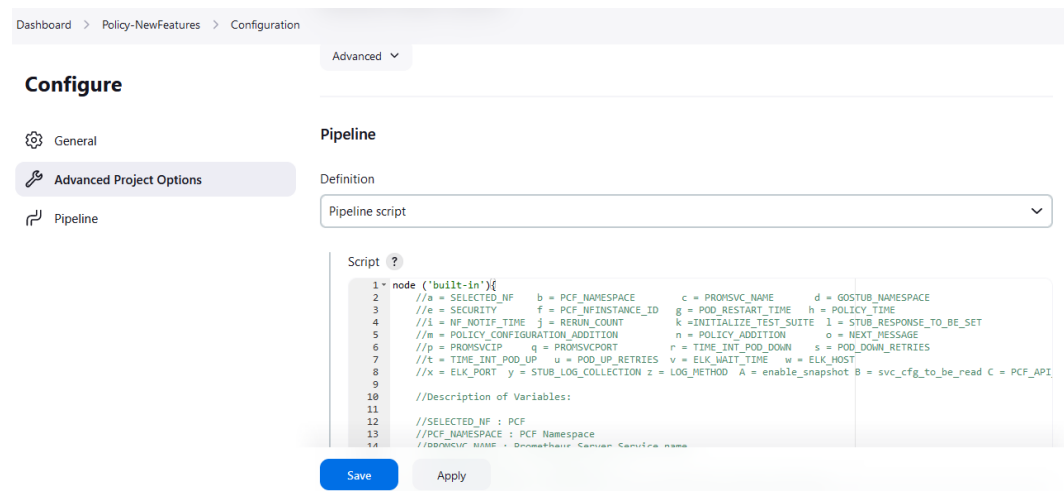

6. In the Script area under the Pipeline section, users may customize the values for the following parameters:

**NOT\_SUPPORTED**

Do not modify values of parameters other than the ones described in this section.

- **b**: Change this parameter to update the namespace where Policy is deployed in your bastion.
- **d**: Change this parameter to update the namespace where gostubs are deployed in your bastion.
- **e**: Set this parameter as 'unsecure', if you intend to run ATS in TLS disabled mode. Else, set this parameter as 'secure'.
- **g**: Set this parameter to more than 45 secs. The default wait time for the pod is 45 secs. Every TC requires restart of the nrf-client-management pod.
- **h**: Set this parameter to more than 60 secs. The default wait time to add a configured policy to the database is 60 secs.
- **i**: Set this parameter to more than 140 secs. The default wait time for Nf\_Notification Test Cases is given as 140 secs.
- **k**: Use this parameter to set the waiting time to initialize Test Suite.
- **l**: Use this parameter to set the waiting time to get response from Stub.



- **m:** Use this parameter to set the waiting time after adding Policy Configuration.
- **n:** Use this parameter to set the waiting time after adding Policy.
- **o:** Use this parameter to set the waiting time before sending next message.
- **p:** Use this parameter to set Prometheus Server IP.
- **q:** Use this parameter to set Prometheus Server Port.
- **r:** Use this parameter to set the interval after which the POD status is checked when it is down.
- **s:** Use this parameter to set number of retry attempt in which will check the pod down status
- **t:** Use this parameter to set the interval after which we check the POD status if its UP.
- **u:** Use this parameter to set number of retry attempt in which will check the pod up status.
- **v:** Use this parameter to set Wait time to connect to Elastic Search
- **w:** Use this parameter to set Elastic Search HostName
- **x:** Use this parameter to set Elastic Search Port
- **y:** Use this parameter to set To Enable/Disable Stub logs collection
- **z:** Use this parameter to set Log collection endpoint either Elasticsearch or Kubernetes
- **A:** Use this parameter to enable or disable snapshots that are created at the start and restored at the end of each test run
- **B:** Use this parameter to for timer to wait for importing service configurations
- **C:** Use this parameter to set PCF\_API\_ROOT information for Ingress gateway service name and port.
- **D:** Use this parameter to set bulk\_import\_to\_complete to add custom time in Jenkins post bulk imports.

(Optional) To collect application logs per failed scenario, user can configure the values for the following parameter:

- **z:** If you want log collection to happen through Elastic search, set the value for this parameter as `Elasticsearch`. If not, specify the value as `Kubernetes`. If you want to collect logs Elastic search, it is required to configure the values for the following parameters:
    - **v:** Specifies the wait time to connect to Elastic search (`ELK_WAIT_TIME`).
    - **w:** Specifies the host name of Elastic search (`ELK_HOST`). For example, `occne-elastic-elasticsearch-master.occne-infra/`
    - **x:** Specifies the port for Elastic search (`ELK_PORT`). For example, `9200`.
  - **y:** If you want to collect stub logs, set the value for this parameter as `yes`. If not, specify the value as `no`.
7. **A:** To enable or disable snapshots that are created at the start and restored at the end of each test run.
  8. Click **Save** to update the values. The Policy\_NewFeatures Pipeline page appears.

**Note**

It is recommended to save the pipeline script in your local machine as it is needed at the time of ATS pod restart.

**Extracting Application Logs**

If any scenarios failed after running the pipeline job, perform the following steps:

1. Log in to the ATS pod:

```
kubectl exec -it pod/ocnp1-ocats-ocats-policy-xxxxxxx -n ocpcf bash
```

2. Go to build directory:

```
cd /var/lib/jenkins/.jenkins/jobs/Policy-Regression/builds/1
```

For example:

```
cd $JENKINS_HOME/jobs/$JOB_NAME/builds/$BUILD_NUMBER/
```

3. Extract the applogs.zip file:

```
unzip applogs.zip
```

4. After successfully unzipping the file, open the applog folder to view pod logs for failed scenarios:

```
(env) [jenkins@gapcf-ocats-ocats-policy-6df5cd84c-c6cm4 applog]$ pwd
/var/lib/jenkins/.jenkins/jobs/Policy-Regression/builds/3/applog
(env) [jenkins@gapcf-ocats-ocats-policy-6df5cd84c-c6cm4 applog]$ ls -ltrh
total 1.4M
-rw-r--r--. 1 jenkins jenkins 461K Sep  1 14:49 Initial_Run-
Send_Npcf_SMPolicyControl_Create_request_message_to_PCF_and_verify_the_praI
nfos_structure_is_downloaded_in_the_response_message_to_SMF_also_check_requ
ests_total_metric_incremented_in_the_PCF.log
-rw-r--r--. 1 jenkins jenkins 459K Sep  1 14:49 1st_Rerun-
Send_Npcf_SMPolicyControl_Create_request_message_to_PCF_and_verify_the_praI
nfos_structure_is_downloaded_in_the_response_message_to_SMF_also_check_requ
ests_total_metric_incremented_in_the_PCF.log
-rw-r--r--. 1 jenkins jenkins 459K Sep  1 14:49 2nd_Rerun-
Send_Npcf_SMPolicyControl_Create_request_message_to_PCF_and_verify_the_praI
nfos_structure_is_downloaded_in_the_response_message_to_SMF_also_check_requ
ests_total_metric_incremented_in_the_PCF.log
```

**Running Policy Test Cases**

To run CNC Policy test cases, perform the following steps:

1. Click the **Build with Parameters** link available in the left navigation pane of the **Policy-NewFeatures** Pipeline screen. The following screen appears.

Figure 4-50 Pipeline Policy-NewFeatures

2. Select any of following valid values from the drop-down for **SUT**:
  - PCF
  - cnPCRF
  - Converged Policy
3. Select any of following valid values from the drop-down for **Configuration\_Type**:
  - **Product\_Config**: On selecting this option, test cases from product folders are populated on ATS UI and product configuration is applied to them via the key-value pair and yaml files defined or present in the "Product Config" folder.
  - **Custom\_Config**: On selecting this option, test cases from custom folders are populated on ATS UI and custom configuration is applied to them via the key-value pair and yaml files defined or present in the "Custom Config" folder.  
To use the parameterization feature, always select the **Custom\_Config** option. User can copy, add, or delete the required test cases that are available for the Converged Policy, PCF or PCRF and place them appropriately within the **custom** folder for **Policy-NewFeatures**. Reload the page to view the test cases available in the **custom** NewFeatures folder.

For more information, see [Parameterized approach for SUT custom configuration](#).
4. For the **Select\_Option** field, select any of the following drop-down values:
  - **All**: By default, all the Policy test cases are selected for execution.
  - **Single/MultipleFeatures**: This option allows you to select any number of test cases you want to run from the list of total test cases. Select the check-box for each feature you want to run.

Based on your selection, related **Test Cases** appear on the page.

5. To collect logs for any given build, select YES from the drop-down menu of **Fetch\_Log\_Upon\_Failure**.
6. Click **Build** and select **Console Output** to view the test results. The following is a sample test result output:

**Figure 4-51 Test Result Output in Console**

```
# ../../../../../../../../../../env/lib64/python3.9/site-packages/ocnftest/common_steps.py:194
2023-06-22 05:43:21,589[32m INFO LOG.stage1.group1.STEP:331 [0m] [32mocng[0m
2023-06-22 05:43:21,596[31m ERROR LOG.stage1.group1.Prometheus_Client:71 [0m] [31mCould not fetch scrapeInterval from prometheus[0m
2023-06-22 05:43:21,599[31m ERROR LOG.stage1.group1.Prometheus_Client:91 [0m] [31mCould not fetch target_namespace from prometheus[0m
Then Waiting for test_suite_to_initialize
# ../../../../../../../../../../env/lib64/python3.9/site-packages/ocnftest/pcf_steps.py:2515
2023-06-22 05:43:21,606[32m INFO LOG.stage1.group1.STEP:2532 [0m] [32mWait for 0s[0m
Then Unset Variable
# ../../../../../../../../../../env/lib64/python3.9/site-packages/ocnftest/pcf_steps.py:286
Given Check And Set Policy Namespace
# ../../../../../../../../../../env/lib64/python3.9/site-packages/ocnftest/pcf_steps.py:105
2023-06-22 05:43:21,608[32m INFO LOG.stage1.group1.STEP:110 [0m] [32mPCF Namespace set to vega-ns5[0m
Given Create Service Client
# ../../../../../../../../../../env/lib64/python3.9/site-packages/ocnftest/pcf_steps.py:115
2023-06-22 05:43:21,883[32m INFO LOG.stage1.group1.STEP:133 [0m] [32mATS Pod IP 10.233.102.218[0m
2023-06-22 05:43:21,883[32m INFO LOG.stage1.group1.STEP:128 [0m] [32mDiam pod name vega-ns5-oc-diam-gateway-0[0m
2023-06-22 05:43:21,884[32m INFO LOG.stage1.group1.STEP:130 [0m] [32mvega-ns5-oc-diam-gateway-0[0m
2023-06-22 05:43:21,884[32m INFO LOG.stage1.group1.STEP:134 [0m] [32mDiam gw pod info - {'vega-ns5-oc-diam-gateway-0': '10.233.70.70'}[0m
2023-06-22 05:43:21,886[32m INFO LOG.stage1.group1.STEP:140 [0m] [32mATS svc name ocats-policy[0m
2023-06-22 05:43:21,888[32m INFO LOG.stage1.group1.STEP:212 [0m] [32mLdap org1 service name is: vega-ns5-oc-ldap-org1-service[0m
2023-06-22 05:43:21,889[32m INFO LOG.stage1.group1.STEP:214 [0m] [32mLdap org1 service cluster IP is: 10.233.56.158[0m
2023-06-22 05:43:21,889[32m INFO LOG.stage1.group1.STEP:218 [0m] [32mLdap org1 service port is: 8080[0m
2023-06-22 05:43:21,889[32m INFO LOG.stage1.group1.STEP:221 [0m] [32mLdap org1 service secure port is: 8081[0m
```

**Note**

For more details on consolidated test report, see [Managing Final Summary Report, Build Color, and Application Log](#).

**Parameterized approach for SUT custom configuration**

Using this feature, user can make the following customizations to custom folders

- Add new test cases by adding datafiles
- Remove test cases
- Modify the parameters and their values in the key-value pair or <feature>.yaml files

To run ATS test cases, user can maintain as many versions of Custom Config folder by using the following naming convention:

Cust ConfigN

where N can be any number

At the time of execution, ensure to rename the required folder to **Cust Config** folder as Jenkins always retrieves data from this folder when user selects **Custom\_Config**.

**Updating Global Parameters**

To use Custom\_Config, it is required to change the value of **cust\_folder** from **data** to **cust\_data** in global.yaml file. In addition, you can customize the parameters and their respective values in the global.yaml as per the requirements.

To use custom diameter identity, update the value of parameter "diam\_gw\_id" under global.yaml file to the one configured for "DIAMETER\_Identity" under diam-gw's statefulset.

**Updating Feature Parameters**

Consider the following points when customizing <feature>.yaml files for parameterized feature:

- In addition to global.yaml parameters, feature files may also contain parameters for which user can update values at the time of running pipelines.

- Changing the values of parameters tagged as "Feature Specific Value" may cause failures at the time of running pipelines.
- Values for parameters tagged with #START\_GLOBAL and #END\_GLOBAL tags take values from `global.yaml`.

#### **Note**

For CNC Policy-ATS release 24.2.7, parameterization is supported for PCF features only.

### **Incorrect Values**

If the value to be parameterized is incorrect or not updated correctly, the following error is generated:

```
2021-12-17 09:02:43,908[32m      INFO LOG.featureHooks:14 [0m] [32mInside
before_feature[0m
2021-12-17 09:02:43,908[32m      INFO LOG.goldenConfig:305 [0m] [32mInside
goldenConfig.py[0m
2021-12-17 09:02:43,912[31m      ERROR LOG.goldenConfig:93 [0m] [31mPlease
check if the key metricsEnabled is valid or if it is present under correct
section[0m
2021-12-17 09:02:43,913[32m      INFO LOG.goldenConfig:324 [0m] [32mExiting
goldenConfig.py[0m
2021-12-17 09:02:43,913[32m      INFO LOG.featureHooks:27 [0m] [32mExiting
before_feature[0m
```

The execution continues to happen without any changes to the data files.

### **Config-Rollback (Snapshot Backup and Restore)**

Using this feature, user can take a snapshot of initial configuration of the system, and then restore it at a later stage. On enabling this feature, a snapshot of system configurations is taken before ATS run starts and is reverted on completion of ATS job.

### **Queuing Jenkins Jobs**

Using this feature, you can queue a second job even when current job is still running. The second job can be triggered either from the same or a different pipeline.

The following table lists various scenarios on how queuing works:

**Table 4-6 Queuing Jenkins Jobs**

| Concurrent Builds | New Features Current Build | New Features New Build | Regression Current Build | Regression New Build Build | Result                                       |
|-------------------|----------------------------|------------------------|--------------------------|----------------------------|----------------------------------------------|
| Enabled           | Running                    | Triggered              | NA                       | NA                         | New-Build of New-Features is added to queue. |
| Enabled           | Running                    | NA                     | NA                       | Triggered                  | New-Build of Regression is added to queue.   |

Table 4-6 (Cont.) Queuing Jenkins Jobs

| Concurrent Builds | New Features Current Build | New Features New Build | Regression Current Build | Regression New Build Build | Result                                       |
|-------------------|----------------------------|------------------------|--------------------------|----------------------------|----------------------------------------------|
| Disabled          | NA                         | NA                     | Running                  | Triggered                  | New-Build of Regression is added to queue.   |
| Disabled          | NA                         | Triggered              | Running                  | NA                         | New-Build of New-Features is added to queue. |

### Test Result Analyzer

Using the Test Result Analyzer plug-in, user can view consolidated and detailed reports. For more information, see [Test Results Analyzer](#) section.

### Test Case Mapping to Features and Display Total Counts

With this feature, users can view total count of features, test cases, and TestCase mapping for each feature of CNC Policy on ATS GUI. For more information, see [Support for Test Case Mapping and Count](#).

## 4.5.5 Policy-NewFeatures Documentation

This section describes the documentation for **Policy-NewFeatures** pipeline.

To view the documentation for any of the CNC Policy features, on the ATS home page, click Policy-NewFeatures. Then, click **Documentation** in the left navigation pane.

On clicking Documentation, the following page opens with the list of new features:

Figure 4-52 Policy-NewFeatures Feature List

[Back to Policy-NewFeatures](#) [pages](#)

## My Project

### Related Pages

Here is a list of all related documentation pages:

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| FEATURE - AM_Error_Response_Enhancement                                             |  |
| FEATURE - AM_UDR_Data_change_notification                                           |  |
| FEATURE - Binding_Error_Response_Enhancement                                        |  |
| FEATURE - nCHF_Connector_Consumer_Error_Response_Enhancement_SM                     |  |
| FEATURE - nCHF_Connector_Producer_Error_Response_Enhancement                        |  |
| FEATURE - NetLoc_SM_Rx_AAR_ocLogId                                                  |  |
| FEATURE - NF_Service_Status_Auto_Reg_and_Error_Mapping_NF_Producer                  |  |
| FEATURE - NRF_Error_Response_Enhancement_PCF_as_Producer                            |  |
| FEATURE - NRFClient_Partial_Update                                                  |  |
| FEATURE - nUDR_Connector_Consumer_Error_Response_Enhancement_SM                     |  |
| FEATURE - nUDR_Connector_Producer_Error_Response_Enhancement_AM                     |  |
| FEATURE - PCF_Support_BSF_Stale_Session_ocLogId                                     |  |
| FEATURE - Pending_Transaction_AM_Err_Resp_En                                        |  |
| FEATURE - Pending_Transaction_N7_Fast_Lock_Bulwark_with_SM_Error_handler            |  |
| FEATURE - Pending_Transaction_UE_Err_Resp_En                                        |  |
| FEATURE - RAA_Error_handling_with_SM_PA_audit                                       |  |
| FEATURE - SM_Create_Ctx_Info_On_Failure                                             |  |
| FEATURE - SM Service for error mapping when PCF is producer and consumer of errors. |  |
| FEATURE - SMF_retry_ODD_svcname_SM_Error_handler                                    |  |
| FFATUIRF - IIF Error Response Enhancement                                           |  |

**Example:** On clicking **FEATURE - AM\_Error\_Response\_Enhancement**, the following screen opens:

Figure 4-53 FEATURE - AM\_Error\_Response\_Enhancement

[Back to Policy-NewFeatures](#) [pages](#)

## My Project

### FEATURE - AM\_Error\_Response\_Enhancement

**This feature aims to support error responses sent by PCF where PCF-AM Service working as Error Producer.**

**Pre-conditions:** The background scenario sets up the pre-requisites and basic configurations needed to run the tests

```
#1.Initialize test suite, check namespace and create clients
#2.Enable debug loglevel
#3.Set NRF stub response for NF subscription & un-subscription
#4.Subscribe to NRF
#5.Registering UDRs
#6.Importing the am-service error handler configuration and user service configuration
```

**SCENARIO:** Verify that PCF-AM service sends "400 BAD\_REQUEST" with cause "MANDATORY IE MISSING" error code and enhanced detail when AM create request is sent

Based on the features covered under Documentation, the **Build Requires Parameters** screen displays test cases.

To navigate back to the Policy-NewFeatures pipeline, click **Back to Policy-NewFeatures** link available on the top left corner of the screen.

## 4.5.6 Running Policy-Regression Pipeline

This section describes how to run test cases for CNC Policy Regression pipeline.


The **Policy-Regression** pipeline is a pre-configured pipeline where all the test cases of previous releases are available. For an example, for Policy 24.2.7, this pipeline has all the test cases released till Policy 24.1.0.

### Running Policy Test Cases

To run CNC Policy test cases in regression pipeline, perform the following steps:

1. Click **Policy-Regression** in the **Name** column.
2. Click the **Build with Parameters** link available in the left navigation pane of the **Policy-Regression** Pipeline screen. The following screen appears.

**Figure 4-54 Regression Pipeline**

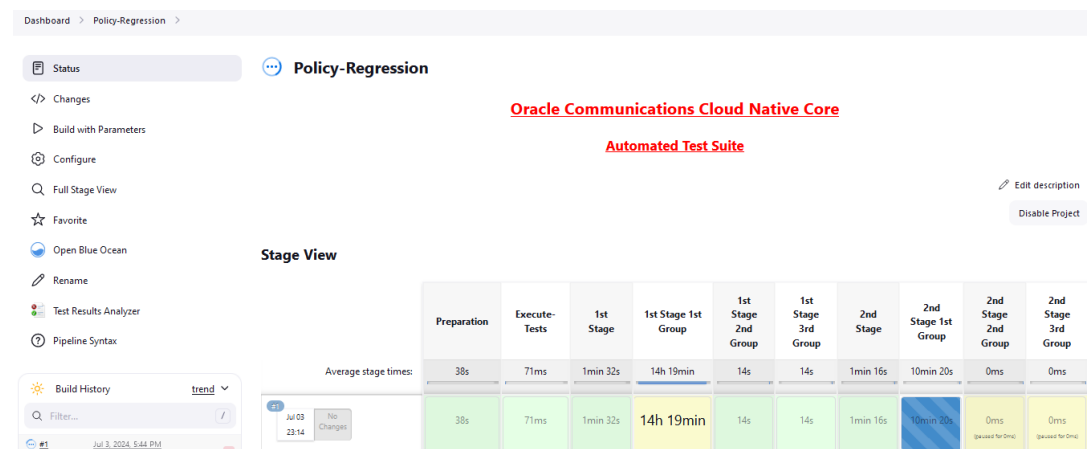

### Note

ATS display empty list for test cases as it is referring to the **custom** folder for **Policy-Regression** pipeline.

3. Select any of following valid values from the drop-down for **SUT**:
  - PCF
  - CN-PCRF
  - Converged Policy
4. Select any of following valid values from the drop-down for **Configuration\_Type**:
  - **Product\_Config**: On selecting this option, test cases from product folders are populated on ATS UI and product configuration is applied to them via the key-value pair and yaml files defined or present in the "Product Config" folder.
  - **Custom\_Config**: On selecting this option, test cases from custom folders are populated on ATS UI and custom configuration is applied to them via the key-value pair and yaml files defined or present in the "Custom Config" folder.



To use the parameterization feature, always select the **Custom\_Config** option. User can copy, add, or delete the required test cases that are available for the Converged Policy, PCF or PCRF and place them appropriately within the **custom** folder for **Policy-NewFeatures**. Reload the page to view the test cases available in the **custom NewFeatures** folder.

5. For the **Select\_Option** field, select any of the following drop-down values:
  - **All:** By default, all the Policy test cases are selected for execution.
  - **Single/MultipleFeatures:** This option allows you to select any number of test cases you want to run from the list of total test cases. Select the check-box for each feature you want to run.

Based on your selection, related **Test Cases** appear on the page.

6. To collect logs for any given build, select YES from the drop-down menu of **Fetch\_Log\_Upon\_Failure**.
7. Click **Build** and select **Console Output** to view the test results. The following is a sample test result output:

**Figure 4-55 Policy-Regression Console Output**

```
# ...../lib64/python3.9/site-packages/ocnftest/ocnf_steps.py:14571
2023-06-23 09:13:01,012[32m INFO LOG.stage1.group1.STEP:14625 [0m] [32mFetched metrics in 0.26s[0m
2023-06-23 09:13:01,014[32m INFO LOG.stage1.group1.STEP:14631 [0m] [32mPostFetch metrics for policy-ds service are saved to '/tmp/group1-Post-policy-ds'[0m
Then Waiting for next_message
# ...../lib64/python3.9/site-packages/ocnftest/pcf_steps.py:2515
2023-06-23 09:13:01,023[32m INFO LOG.stage1.group1.STEP:2532 [0m] [32mWait for 1s[0m
Then Validate policy-ds metric client_response_total containing method="SEARCH",(*)response="200 OK",(*)workflow="SSV-GET" is greater_than_or_equal_to 1
# ...../lib64/python3.9/site-packages/ocnftest/ocnf_steps.py:14678
2023-06-23 09:13:02,031[32m INFO LOG.stage1.group1.STEP:14711 [0m] [32mPrefetch value for metric client_response_total method="SEARCH",(*)response="200 OK",(*)workflow="SSV-GET" : 299[0m
2023-06-23 09:13:02,034[32m INFO LOG.stage1.group1.STEP:14731 [0m] [32mPostFetch value for metric client_response_total method="SEARCH",(*)response="200 OK",(*)workflow="SSV-GET" : 300[0m
2023-06-23 09:13:02,035[32m INFO LOG.stage1.group1.STEP:14763 [0m] [32mMetrics incremented successfully[0m
Then Validate policy-ds metric client_response_total containing method="UPDATE",(*)response="200 OK",(*)workflow="SSV-UPDATE" is greater_than_or_equal_to 1
# ...../lib64/python3.9/site-packages/ocnftest/ocnf_steps.py:14678
```

#### **Note**

The Regression pipeline does not have any sanity option. However, users must perform all the steps performed in the **Policy-NewFeatures** pipeline. Ensure that the pipeline script is configured according to the environment variables.

#### **Note**

For more details on consolidated test report, see [Managing Final Summary Report, Build Color, and Application Log](#).

## 4.5.7 Policy-Regression Documentation

This section describes the documentation for **Policy-Regression** pipeline.

To view the documentation for any of the CNC Policy features, on the ATS home page, click PolicyRegression. Then, click **Documentation** in the left navigation pane.

The following screen appears:

**Figure 4-56 Policy-Regression Feature List**[Back to #1](#) pages

## My Project

### Related Pages

Here is a list of all related documentation pages:

[FEATURE - Add\\_NFSetIDList](#)  
[FEATURE - Bulk\\_Import\\_Export](#)  
[FEATURE - 3GPP\\_User\\_Location\\_Info\\_Support](#)  
[FEATURE - AM\\_CHF\\_ServerHeader\\_MExx](#)  
[FEATURE - AM\\_Collision\\_Detection](#)  
[FEATURE - AM\\_Concurrency](#)  
[FEATURE - AM\\_Concurrency\\_Extended\\_ID](#)  
[FEATURE - AM\\_Error\\_mapping](#)  
[FEATURE - AM\\_Late\\_Arrival](#)  
[FEATURE - AM\\_Notify\\_SessRetry\\_ODD](#)  
[FEATURE - AM\\_Policy\\_Audit](#)  
[FEATURE - AM Policy UPDATE-NOTIFY-RETRY and TERMINATE-NOTIFY-RETRY](#)  
[FEATURE - AM\\_SR\\_Enable\\_DNS\\_Resolution](#)  
[FEATURE - AM\\_UDR\\_SessRetry\\_ServerHeader](#)  
[FEATURE - AM\\_UpdateNotify\\_terminate](#)  
[FEATURE - AM Service Refactoring](#)  
[FEATURE - Asynchronous\\_Access\\_nCHF](#)  
[FEATURE - Asynchronous\\_Access\\_nCHF\\_Multi\\_Session](#)  
[FEATURE - Asynchronous\\_Access\\_nCHF](#)  
[FEATURE - Support for 3GPP NF Sets and Binding in SBI interfaces - AM Service.](#)

**Example:** On clicking **FEATURE - Add\_NFSetIDList**, the following screen opens:

**Figure 4-57 FEATURE - Add\_NFSetIDList**[Back to #1](#) pages

2

## My Project

### FEATURE - Add\_NFSetIDList

**On Adding the NFSetID List in PCF NF Profile, NRF will be able to discover PCF with NfSetID of PCF as query parameter, also this feature will verify the registration of PCF with NRF and perform autonomous discovery of UDR and CHF after the nrf client is restarted**

#### PRE-CONDITIONS

#1.Bringing up Gostubs to simulate NRF,CHF,UDR,SMF  
 #2.Register these PCF,CHF,UDR with NRF  
 #3.Send a discover UDR Request from PCF to NRF and receive response  
 #4.Send a discover CHF Request from PCF to NRF and receive response  
 #5.Send a subscribe UDR Request from PCF to NRF and receive response  
 #6.Send a subscribe CHF Request from PCF to NRF and receive response

#7.To set HTTP response when PCF discovers UDR and CHF NF

#8.To add the NFSetID List in pcf application-config

#9.To restart the NRF Client POD

**SCENARIO - Add NFSetID List to PCF NF Profile and check PCF registration with NRF is**

This page shows features of only those test cases that are released in previous releases.

## 4.6 Running SCP Test Cases using ATS

This section describes how to run SCP test cases using ATS.

## 4.6.1 Logging in to ATS

### Logging in to ATS GUI in Non-OCI Setup

Before logging in to ATS, ensure that ATS and Stubs are deployed using Helm charts. A sample screenshot is provided as follows:

**Figure 4-58 Verifying ATS Pod**

```
[root@master ocats]# helm status ocats-ocscp -n scpsvc
NAME: ocats-ocscp
LAST DEPLOYED: Thu Aug 31 05:16:22 2023
NAMESPACE: scpsvc
STATUS: deployed
REVISION: 1
TEST SUITE: None
NOTES:
# Copyright 2020 (C), Oracle and/or its affiliates. All rights reserved.

Thank you for installing ocats-ocscp.

Your release is named ocats-ocscp , Release Revision: 1.
To learn more about the release, try:

$ helm status ocats-ocscp
$ helm get ocats-ocscp

[root@master ocats]# kubectl get pods -n scpsvc | grep ocats
ocats-ocscp-ocats-scp-778f449f9d-lxfwz 1/1 Running 0 2m52s
[root@master ocats]# kubectl get svc -n scpsvc | grep ocats
ocats-ocscp-ocats-scp LoadBalancer 10.101.29.158 <pending> 8080:30345/TCP 2m56s
```

#### Note

In the Verifying ATS Pod image, the ATS nodeport is highlighted in red as **30345**. For more information about ATS deployment, see [Deploying ATS and Stub in the Kubernetes Cluster](#). Similarly, verify Stub deployments.


To log in to the ATS GUI, open the browser and either provide the external IP address of the worker node and nodeport of the ATS service as <Worker-Node-IP>:<Node-Port-of-ATS> or provide the IP address of the load balancer and serviceport of the ATS service as <ATS-LB-IP>:<Service-Port-of-ATS>.

The ATS login screen appears.

Figure 4-59 Logging in to ATS GUI

**Oracle Communications Cloud Native Core - Automated Test Suite**

Welcome to ATS!

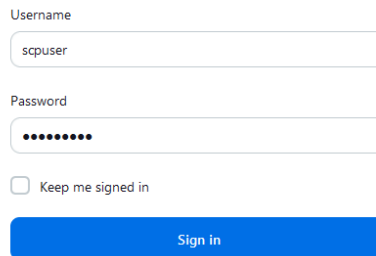

The screenshot shows the login interface for the Oracle Communications Cloud Native Core Automated Test Suite (ATS). It features a 'Username' field with the text 'scpuser', a 'Password' field with masked characters, a checkbox labeled 'Keep me signed in', and a blue 'Sign in' button.

**Running ATS****Note**

It is recommended to keep the rerun count to minimum 1 for running ATS testcases.

To run ATS:


1. Enter the login credentials and click **Sign in**.

**Note**

To modify default login password, see [Modifying Login Password](#).

The following screens appear to display preconfigured pipelines for SCP individually.

Figure 4-60 ATS SCP First Login Screen

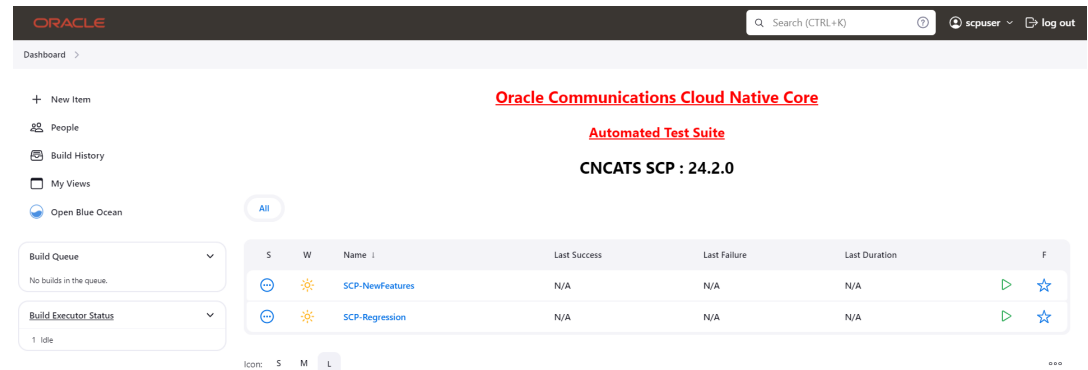

The different pre-configured pipelines for SCP are as follows:

- **SCP-NewFeatures:** This pipeline has all the test cases delivered as part of this release.
- **SCP-Regression:** This pipeline covers all the test cases from the previous releases.

### Logging in to ATS GUI in OCI Setup

To access the ATS GUI in OCI, see the [Accessing ATS GUI in OCI](#) section.

### Logging in to ATS GUI with HTTPS Enabled

To access the ATS GUI, see the [Enable ATS GUI with HTTPS](#) section.

#### Note

For more information, see the [Support for Transport Layer Security](#).

## 4.6.2 SCP-NewFeatures Pipeline

This section describes how to configure new feature pipeline parameters, run SCP test cases, and view functionalities.


### 4.6.2.1 Configuring New Feature Pipelines

This is a pre-configured pipeline where all the SCP test cases are executed.

To configure its parameters, do the following:

1. Click **SCP-NewFeatures** in the **Name** column.  
The SCP-NewFeatures screen appears.

**Figure 4-61 SCP-NewFeatures**

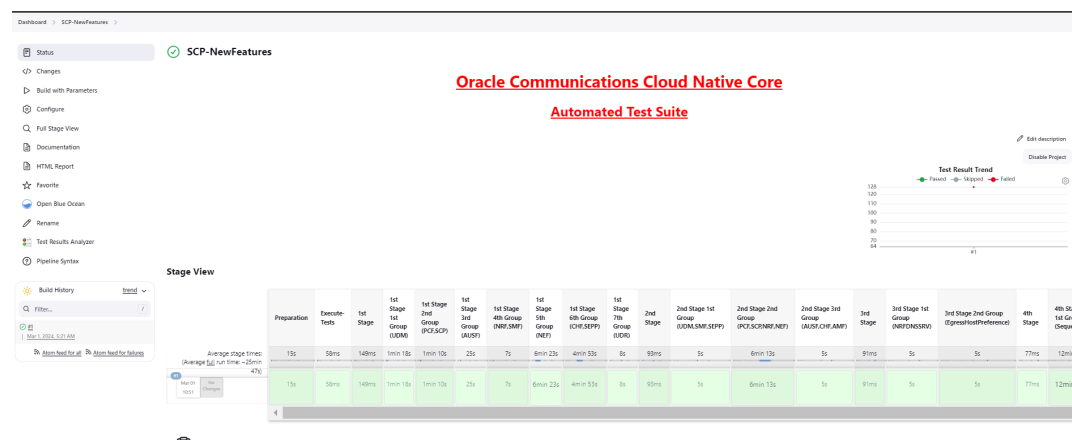

According to the installation guide, the configuration parameters can be modified in the `ocats_ocscp_values.yaml` file before deployment. If you are executing SCP test cases for the first time without enabling the parameters in the deployment file, then you have to set the input parameters before executing any test case. There is no need to set these parameters again unless there is a change in the configuration.

2. In the left navigation pane, click **Configure** to provide input parameters and scroll down to the pipeline script as shown in the following image:  
The General tab appears.

**Note**

Ensure that the following screen loads completely before you perform any action on it. Also, do not modify any other configuration than what is specified in the subsequent steps.

The control moves from the **General** tab to the **Pipeline** tab, as shown in the following screenshot:

Figure 4-62 Pipeline Tab

Dashboard > SCP-NewFeatures > Configuration

**Configure**

General

Advanced Project Options

Pipeline

Advanced Project Options

Pipeline

Definition

Pipeline script

Script

```

1 node('built-in'){
2   //a = SELECTED_NF b = NFNAMESPACE c = CLUSTERDOMAIN d = DESTNAMESPACE
3   //e = ATSESTRY f = AUDITINTERVAL g = GUARDTIME h = SCPSVCNAME
4   //i = SCPCONFIGSVNAME j = SCPNOTIFYSVNAME k = SCPSUBSVNAME l = DBSECRETNAME
5   //m = MYSQLHOST n = ATSTUBIMAGE o = ATSTUBCPU p = ATSTUBMEMORY q = SCPAUDITSVCNAME
6   //r = RERUN_COUNT s = SCPSVCPORT t = PROMSVNAME u = PROMSVCPOR v = STUBWAITTIME
7   //w = PROMSV_URI x = SUBVALIDITYTIME z = OPENSEARCH_WAIT_TIME A = OPENSEARCH_HOST
8   //B = OPENSEARCH_PORT C = STUB_LOG_COLLECTION D = OPENSEARCH_LOGS E = SCPSVCHTTPSPORT F = SCPNRFPROXYSVCNAME
9   //G = KUBERNETES_HOST H = KAFKANAMESPACE I = SCPDDCLIENTSVNAME J = SCPLBRATELIMITSTUBSVNAME K = SCPCONFIGSVCPOR
10  //L = SCP_METRICS_VERSION
11  withEnv([
12    ])
13  sh '''
14    sh /var/lib/jenkins/ocscp_tests/preTestConfig.sh \
15    -a SCP \
16    -b scpsvc \
17    -c cluster.local \
18    -d scpsvc \
19    -e cgbu-ocscp-dev-docker.dockerhub-phx.oci.oraclecorp.com/ocats \
20    -f 60 \
21    -g 10 \
22    -h ocscp-scp-worker \
23    -i ocscp-scp-configuration \
24    -j ocscp-scp-notification \

```

☒ Use Groovy Sandbox

Pipeline Syntax

Save Apply

3. Modify the values of the pipeline script as required, and then click **Save**. Parameter "-l" must be changed as part of "Pipeline script". The content of the pipeline script is as follows:

```

node('built-in'){
  //a = SELECTED_NF b = NFNAMESPACE c = CLUSTERDOMAIN d =
DESTNAMESPACE
  //e = ATSESTRY f = AUDITINTERVAL g = GUARDTIME h = SCPSVCNAME
  //i = SCPCONFIGSVNAME j = SCPNOTIFYSVNAME k = SCPSUBSVNAME l =
DBSECRETNAME
  //m = MYSQLHOST n = ATSTUBIMAGE o = ATSTUBCPU p = ATSTUBMEMORY
q = SCPAUDITSVCNAME
  //r = RERUN_COUNT s = SCPSVCPORT t = PROMSVNAME u = PROMSVCPOR v =
STUBWAITTIME
  //w = PROMSV_URI x = SUBVALIDITYTIME z = OPENSEARCH_WAIT_TIME A =
OPENSEARCH_HOST
  //B = OPENSEARCH_PORT C = STUB_LOG_COLLECTION D = OPENSEARCH_LOGS E =
SCPSVCHTTPSPORT F = SCPNRFPROXYSVCNAME
  //G = KUBERNETES_HOST H = KAFKANAMESPACE I = SCPDDCLIENTSVNAME J =
SCPLBRATELIMITSTUBSVNAME K = SCPCONFIGSVCPOR
  //L = SCP_METRICS_VERSION
  withEnv([

  ]){

  sh '''
    sh /var/lib/jenkins/ocscp_tests/preTestConfig.sh \
    -a SCP \
    -b scpsvc \
    -c cluster.local \
    -d scpsvc \
    -e cgbu-ocscp-dev-docker.dockerhub-phx.oci.oraclecorp.com/ocats \
    -f 60 \
    -g 10 \
    -h ocscp-scp-worker \
    -i ocscp-scp-configuration \
    -j ocscp-scp-notification \

```

```

-k ocscp-scpc-subscription \
-l appuser-secret \
-m mysql.default.svc.cluster.local \
-n ocats-pystub:tag \
-o 0.5 \
-p 0.5G \
-q ocscp-scpc-audit \
-r 2 \
-s 8000 \
-t occne-prometheus-server.occne-infra \
-u 80 \
-v 300 \
-w /api/ \
-x 120 \
-z 0 \
-A occne-opensearch-cluster-master.occne-infra \
-B 9200 \
-C no \
-D opensearch \
-E 9443 \
-F ocscp-scp-nrfproxy \
-G kubernetes.default \
-H scpsvc \
-I ocats-ocscp-ocats-ddclientstub \
-J ocats-ocscp-ocats-scpglbratelimitstub \
-K 8081 \
-L v1 \
...
if(env.Include_Regression && "${Include_Regression}" == "YES"){
    sh '''sh /var/lib/jenkins/common_scripts/merge_jenkinsfile.sh'''
    load "/var/lib/jenkins/ocscp_tests/jenkinsData/Jenkinsfile-Merged"
}
else{
    load "/var/lib/jenkins/ocscp_tests/jenkinsData/Jenkinsfile-
NewFeatures"
}
}
}

```

The description of these parameters is as follows:

#### Note

Do not modify anything other than these parameters.

- **a:** Selected NF
- **b:** NameSpace in which SCP is deployed
- **c:** K8s Cluster Domain where SCP is deployed
- **d:** Test Stubs NameSpace - **Must be same as SCP Namespace**
- **e:** Docker registry where test stub image is available




- **f:** Audit Interval provided in SCP Deployment file
- **g:** Guard Time provided SCP Deployment file
- **h:** SCP-Worker microservice name as provided during deployment
- **i:** SCPC-Configuration microservice name as provided during deployment
- **j:** SCPC-Notification microservice name as provided during deployment
- **k:** SCPC-Subscription microservice name as provided during deployment
- **l:** DB Secret name as provided during deployment
- **m:** Mysql Host name as provided during deployment
- **n:** Test Stub Image Name with tag
- **o:** Test Stub CPU requests and limit
- **p:** Test Stub Memory requests and limit
- **q:** SCPC-Audit microservice name as provided during deployment
- **r:** re-run count
- **s:** SCPSVCPORT with which SCP is deployed
- **t:** PROMSVCNAME with which Prometheus server is deployed. **Note:** Prometheus service name is followed by namespace in which Prometheus service is existing. Prometheus service is in a different namespace related to deployed SCP namespace.
- **u:** PROMSVCPORT with which Prometheus server is deployed
- **v:** Time to wait for Stub Creation
- **w:** API URI of Prometheus (/api/) - For examples, use **/api/** or **/prometheus/api/**
- **x:** Subscription Validity Time to set by ATS in response to subscription request from SCP
- **y:** Application Debug Logs collection on Rerun if set to true. The default value is false
- **z:** Opensearch connection timeout
- **A:** Opensearch host/service name
- **B:** Opensearch port
- **C:** Stub log collection
- **D:** Opensearch API Path Prefix
- **E:** SCP HTTPS Signaling Port
- **F:** SCP NRF Proxy service name
- **G:** Kubernetes Host
- **I:** scpddclientstub name as provided during deployment
- **J:** scpglobalratelimitstub name as provided during deployment
- **K:** port of configuration pod in SCP deployment
- **L:** scp metrics version

### 4.6.2.2 Running SCP New Feature Pipelines

To run SCP test cases, perform the following steps

1. Click **Build with Parameters** link available in the left navigation pane of the Pipeline SCP-NewFeatures screen.
2. Select the required option from the **Execute\_Suite** drop-down menu to run Suite for R16 or R15 test cases:
  - **R15**: To execute Release 15 test cases for SCP.
  - **R16**: To execute Release 16 test cases for SCP.
3. Select the required option from the **Features** drop-down menu to run the test cases:
  - **All**: To execute all the test cases for SCP based on Release15 or Release16 selection.
  - **Sanity**: Enabled for SCP. Sanity cases are run to do a quick sanity check on SCP SUT features.
  - **Select**: This option allows users to individually select specific features for separate execution. Additionally, users can select the run for an entire stage or group instead of running all feature files.
4. Select one of the following configuration types from the **Configuration\_Type** drop-down menu:
  - **Product\_Config**: To run test cases from the features or regression directory. Test cases in this directory should not be modified.
  - **Custom\_Config**: To run test cases from the features or cust\_regression directory. Any test case customization required should be done in this directory.
5. Select an appropriate option and click **Build** to start test execution.

Figure 4-63 Build

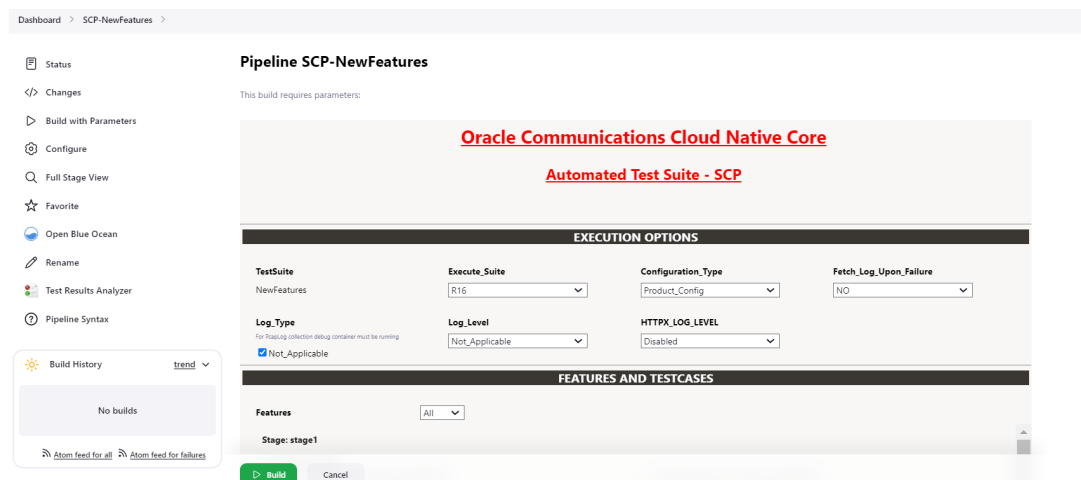

6. Click **Full Stage View** in the left navigation pane to view the status of the run.
7. Hover over values of **Execute Tests** and then click **Logs** to check execution results and logs.

#### Note

A sample consolidated test report is shown in the following image when rerun is set to 2, which is the default value. All the features passed within the first rerun, therefore, the second rerun stage has not been run in this case.

**Figure 4-64 Sample consolidated report**

```
Initial Run :-  
Features RUN 21, PASS 20, FAIL 1  
  
1st Rerun:-  
Features RUN 1, PASS 1, FAIL 0  
  
Final Result:-  
Total-Features RUN 21, PASS 21, FAIL 0
```

For more information about consolidated test report, see [Managing Final Summary Report, Build Color, and Application Log](#).

**Note**

- The New Feature tests in this release have been written according to SCP-ATS parameterization method (Golden Configuration). The individual features are not populated with direct values for the parameters, however, with variable names. While performing the tests, these variables are mapped according to the data provided adjacent to them in the feature specific `<feature_name>.yaml` and `global.yaml` that can be found in the `product_config` directory. This method allows the decoupling of data that can be customer specific from the features. For more information about parameterization (Golden Configuration), see [Parameterization](#).

To view the detail view of the respective group, rerun logs, and the consolidated report summary:

- a. Click **Open Blue Ocean Homepage** from the left navigation pane.
- b. Click the build number in the run column to view the consolidated output of all the feature that are run.
- c. Click **Download icon** to download the log files.

### 4.6.2.3 SCP-NewFeatures Documentation

This pipeline has an HTML report of all the feature files that you can test as part of the SCP ATS release.


1. To view SCP functionalities, go to the **SCP-NewFeatures** pipeline and click the **Documentation** option in the left navigation pane. It lists all the test cases provided as part of SCP ATS -24.2.6.

**Note**

The **Documentation** option appears only if the **SCP-NewFeatures** pipeline test cases are executed at least once.


The following screen appears:

**Figure 4-65 SCP-NewFeatures Documentation**

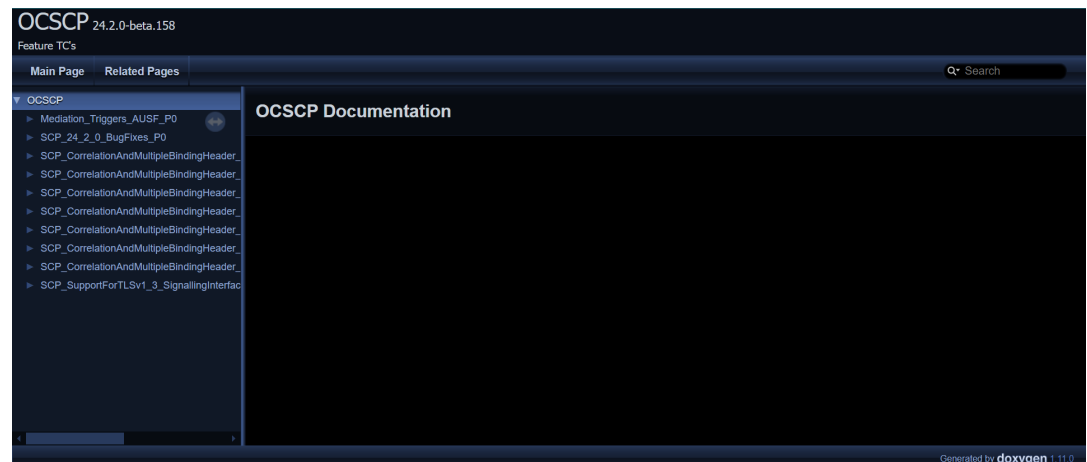

- Click any functionality to view its test cases and scenarios for each test case.

**Figure 4-66 Sample Scenario**

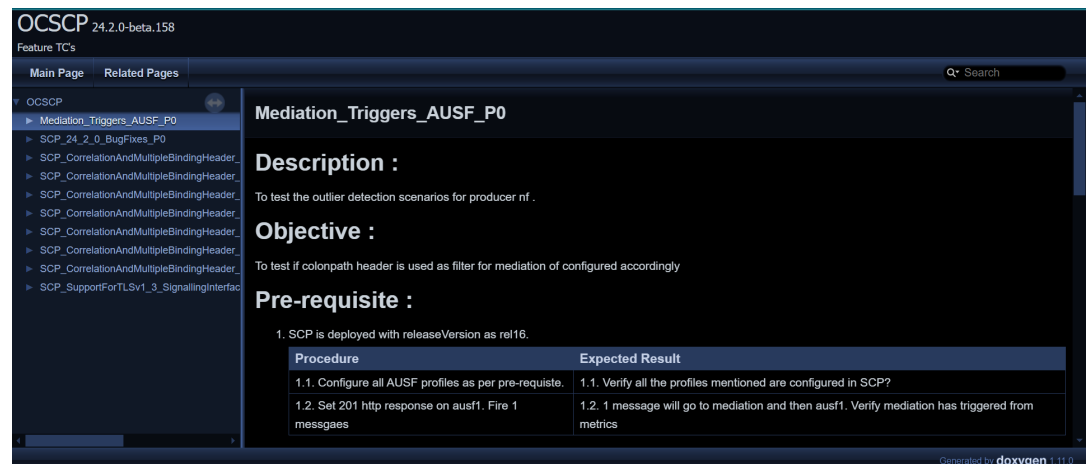

Based on the functionalities covered under Documentation, the screen displays test cases.

- To navigate back to the Pipeline SCP-NewFeatures screen, click the **Back to SCP-NewFeatures** link available in the upper left corner of the screen.

### 4.6.3 SCP-Regression Pipeline


This section describes how to configure regression pipeline parameters, run SCP test cases, and view functionalities.

### 4.6.3.1 Configuring Regression Pipelines

This pre-configured pipeline has all the test cases from previous releases.

1. Click **SCP-Regression Pipeline**:


**Figure 4-67 SCP-Regression Pipeline**

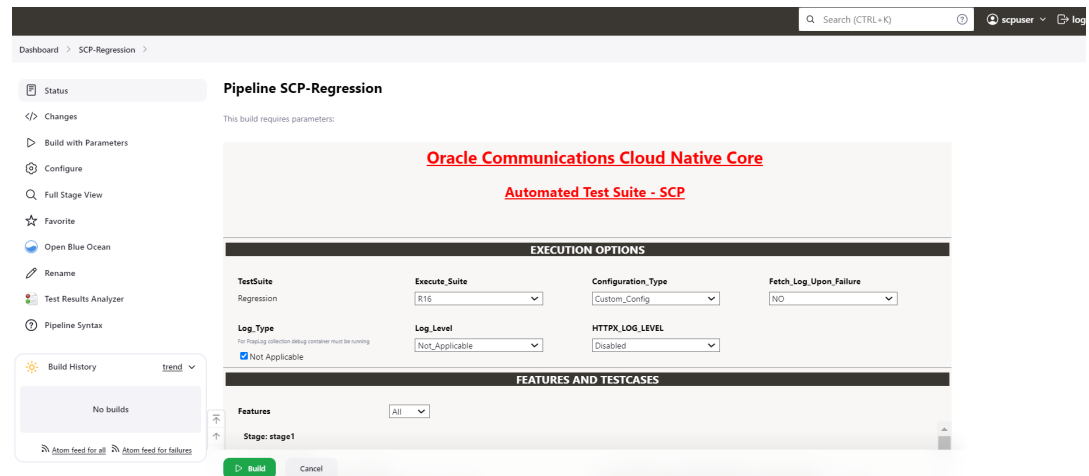

According to the installation guide, the configuration parameters can be modified in the `ocats_ocscp_values.yaml` file before deployment. If you are executing SCP-Regression pipeline test cases for the first time without enabling the parameters in the deployment file, you have to set the input parameters before execution. Subsequent execution does not require any input unless there is a need to change any configuration.

2. In the left navigation pane, click **Configure** to provide input parameters and scroll-down to the pipeline script as shown in the following image:

**Figure 4-68 Regression - Pipeline Script**

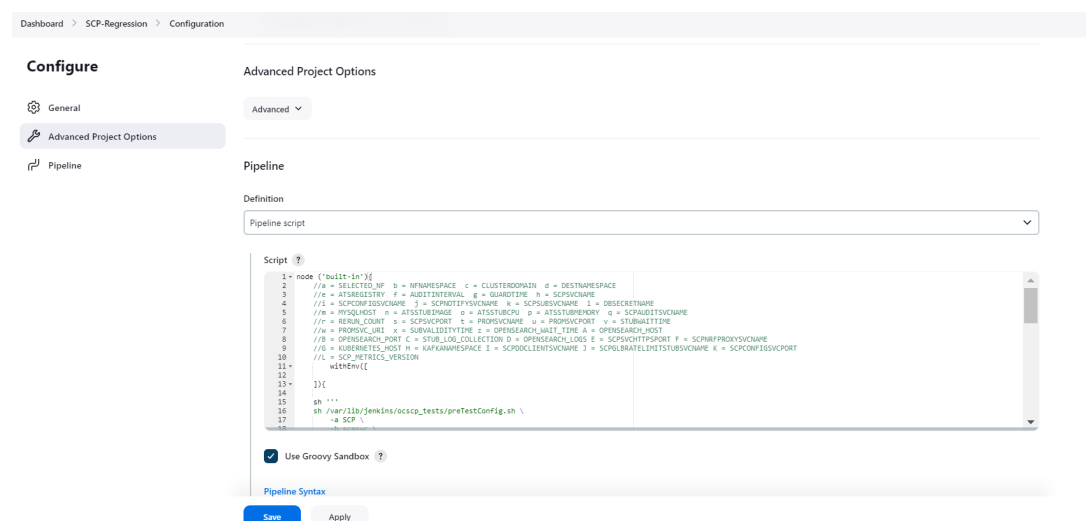

3. Modify the values of the Pipeline script as required, and then click **Save**. Parameter "-I" should be changed as part of "Pipeline script". The content of the pipeline script is as follows:

```
node ('built-in'){
  //a = SELECTED_NF b = NFNAMESPACE c = CLUSTERDOMAIN d =
DESTNAMESPACE
  //e = ATSREGISTRY f = AUDITINTERVAL g = GUARDTIME h = SCPSVCNAME
  //i = SCPCONFIGSVCNAME j = SCPNOTIFYSVCNAME k = SCPSUBSVCNAME l =
DBSECRETNAME
  //m = MYSQLHOST n = ATSSTUBIMAGE o = ATSSTUBCPU p = ATSSTUBMEMORY
q = SCPAUDITSVCNAME
  //r = RERUN_COUNT s = SCPSVCPORT t = PROMSVCNAME u = PROMSVCPORT v
= STUBWAITTIME
  //w = PROMSVC_URI x = SUBVALIDITYTIME z = OPENSEARCH_WAIT_TIME A =
OPENSEARCH_HOST
  //B = OPENSEARCH_PORT C = STUB_LOG_COLLECTION D = OPENSEARCH_LOGS E =
SCPSVCHTTPSPORT F = SCPNRFPROXYSVCNAME
  //G = KUBERNETES_HOST H = KAFKANAMESPACE I = SCPDDCLIENTSVCNAME J =
SCPGLBRATELIMITSTUBSVCNAME K = SCPCONFIGSVCPORT
  //L = SCP_METRICS_VERSION
  withEnv([

  ]){

sh '''
sh /var/lib/jenkins/ocscp_tests/preTestConfig.sh \
  -a SCP \
  -b scpsvc \
  -c cluster.local \
  -d scpsvc \
  -e cgbu-ocscp-dev-docker.dockerhub-phx.oc1.oraclecorp.com/ocats \
  -f 60 \
  -g 10 \
  -h ocscp-scp-worker \
  -i ocscp-scp-configuration \
  -j ocscp-scp-notification \
  -k ocscp-scp-subscription \
  -l appuser-secret \
  -m mysql.default.svc.cluster.local \
  -n ocats-pystub:tag \
  -o 0.5 \
  -p 0.5G \
  -q ocscp-scp-audit \
  -r 0 \
  -s 8000 \
  -t occne-prometheus-server.occne-infra \
  -u 80 \
  -v 300 \
  -w /api/ \
  -x 120 \
  -z 0 \
  -A occne-opensearch-cluster-master.occne-infra \
  -B 9200 \
  -C no \
  -D opensearch \
```

```

        -E 9443 \
        -F ocscp-scp-nrfproxy \
        -G kubernetes.default \
        -H scpsvc \
        -I ocats-ocscp-ocats-ddclientstub \
        -J ocats-ocscp-ocats-scpoglbratelimitstub \
        -K 8081 \
        -L v1 \
    ...
    if(env.Include_NewFeatures && "${Include_NewFeatures}" == "YES"){
        sh '''sh /var/lib/jenkins/common_scripts/merge_jenkinsfile.sh'''
        load "/var/lib/jenkins/ocscp_tests/jenkinsData/Jenkinsfile-Merged"
    }
    else{
        load "/var/lib/jenkins/ocscp_tests/jenkinsData/Jenkinsfile-
Regression"
    }

}
}

```

The description of these parameters is as follows:

- **a:** Selected NF
- **b:** NameSpace in which SCP is deployed
- **c:** K8s Cluster Domain where SCP is deployed
- **d:** Test Stubs NameSpace - **Must be same as SCP Namespace**
- **e:** Docker registry where test stub image is available
- **f:** Audit Interval provided in SCP Deployment file
- **g:** Guard Time provided SCP Deployment file
- **h:** SCP-Worker microservice name as provided during deployment
- **i:** SCPC-Configuration microservice name as provided during deployment
- **j:** SCPC-Notification microservice name as provided during deployment
- **k:** SCPC-Subscription microservice name as provided during deployment
- **l:** DB Secret name as provided during deployment
- **m:** Mysql Host name as provided during deployment
- **n:** Test Stub Image Name with tag
- **o:** Test Stub CPU requests and limit
- **p:** Test Stub Memory requests and limit
- **q:** SCPC-Audit microservice name as provided during deployment
- **r:** re-run count
- **s:** SCPSVCPORT with which SCP is deployed
- **t:** PROMSVCTYPENAME with which prometheus server is deployed. **Note:** Prometheus service name is followed by namespace in which Prometheus service is existing. Prometheus service is in a different namespace related to deployed SCP namespace.
- **u:** PROMSVCTYPEPORT with which prometheus server is deployed

- **v:** Time to wait for Stub Creation
- **w:** API URI of Prometheus (/api/) - Use **"/api/"** or **"/prometheus/api/"**
- **x:** Subscription Validity Time to set by ATS in response to subscription request from SCP
- **y:** Application Debug Logs collection on Rerun if set to true. The default value is false
- **z:** Opensearch connection timeout
- **A:** Opensearch host/service name
- **B:** Opensearch port
- **C:** Stub log collection
- **D:** Opensearch API Path Prefix
- **E:** SCP HTTPS Signaling Port
- **F:** SCP NRF Proxy service name
- **G:** Kubernetes Host
- **I:** scpddclientstub name as provided during deployment
- **J:** scpglobalratelimitstub name as provided during deployment
- **K:** port of configuration pod in scp deployment
- **L:** scp metrics version

### 4.6.3.2 Running Regression Pipelines


This section describes how to run test cases for SCP Regression pipeline.

1. To run the pipeline, click **Build with Parameters** in the left navigation pane.
2. Select the required option from the **Execute\_Suite** drop-down menu to run Suite for R16 or R15 test cases:
  - **R15:** To run Release 15 test cases for SCP.
  - **R16:** To run Release 16 test cases for SCP.
3. Select the required regression option from the **Features** drop-down menu to run the test cases:
  - **All:** To run all the test cases for SCP based on Release15 or Release16 selection. This runs all the cases except SCP\_Audit\_nnrfdisc. If SCP is deployed with nnrfdisc for audit or registration with NRF is disabled, then the **All** option should not be used and instead Single or MultipleFeatures option can be used to select appropriate cases for execution.
  - **Sanity:** Enabled for SCP. Sanity cases are run to do a quick sanity check on SCP SUT features.
  - **Select:** This option allows users to individually select specific features for separate execution. Additionally, users can select the run for an entire stage or group instead of running all feature files.
4. Select one of the following configuration types from the **Configuration\_Type** drop-down menu:
  - **Product\_Config:** To run test cases from the features or regression directory. Test cases in this directory should not be modified.



- **Custom\_Config:** To run test cases from the features or cust\_regression directory. Any test case customization required should be done in this directory.
5. Select an appropriate option and click **Build** to start test execution.

Figure 4-69 Build

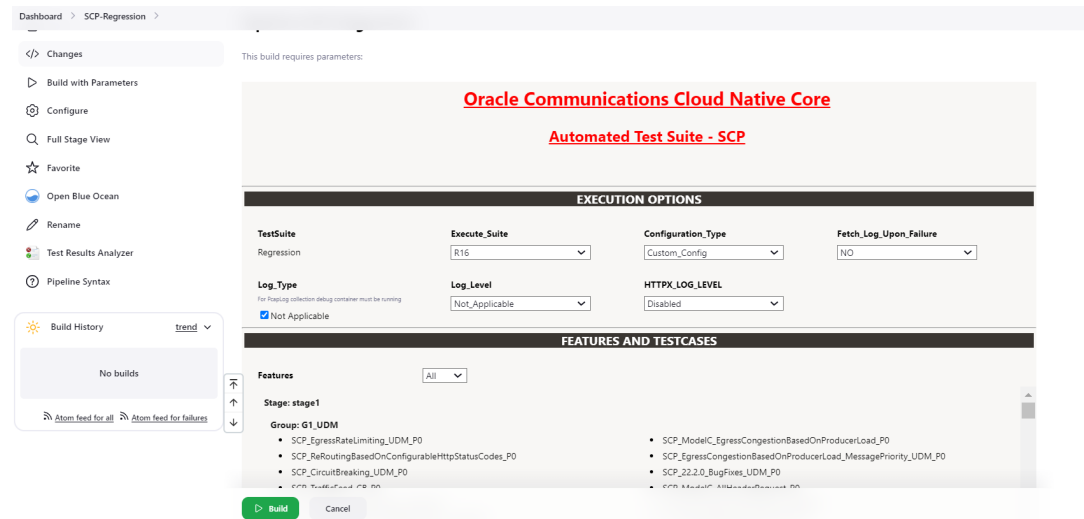

6. Click **Full Stage View** in the left navigation pane to view the status of the run.
7. Hover over the **Execute-Tests** stage of the pipeline, and then click **Logs** to check execution results and logs.  
To view the detail view of the respective group, rerun logs, and the consolidated report summary:
  - a. Click **Open Blue Ocean Homepage** from the left navigation pane.
  - b. Click the build number in the run column to view the consolidated output of all the feature that are run.
  - c. Click **Download icon** to download the log files.

### 4.6.3.3 SCP-Regression Documentation

This pipeline has an HTML report of all the feature files that you can test as part of the SCP ATS release.


1. To view SCP functionalities, go to the **SCP-Regression** pipeline and click the **Documentation** option in the left navigation pane. It lists all the test cases provided as part of SCP ATS -24.2.6.

#### Note

The **Documentation** option appears only if the **SCP-Regression** pipeline test cases are executed at least once.  
In SCP 24.2.6, the feature files are renamed as per the naming convention. For more information, see [Renaming of Regression Feature Files](#)

The following screen appears:

Figure 4-70 SCP-Regression Documentation

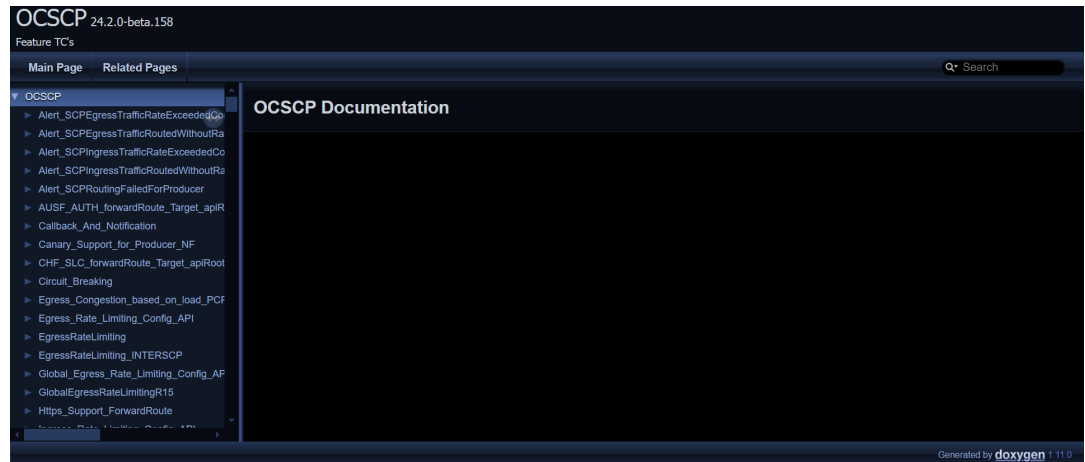

2. Click any functionality to view its test cases and scenarios for each test case.

Figure 4-71 Sample Scenario



Based on the functionalities covered under Documentation, the screen displays test cases.

3. To navigate back to the Pipeline SCP-Regression screen, click the **Back to SCP-Regression** link available in the upper left corner of the screen.

#### 4.6.3.3.1 Renaming of Regression Feature Files

The following tables detail the feature file that has been renamed in alignment with the naming convention:

Table 4-7 Regression Feature File

| Feature Names prior to SCP 24.1.0                  | New Feature Names for SCP 24.1.0                      |
|----------------------------------------------------|-------------------------------------------------------|
| Route_group_static_config_api_validation           | SCP_AlternateRoutingUsingStaticConfig_API_P0          |
| Alternate_Routing_Using_Static_Config_EgressRL_SMF | SCP_AlternateRoutingUsingStaticConfig_EgressRL_SMF_P0 |

Table 4-7 (Cont.) Regression Feature File

| Feature Names prior to SCP 24.1.0                                          | New Feature Names for SCP 24.1.0                                            |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Alternate_Routing_Using_Static_Configuration_Https_SMF                     | SCP_AlternateRoutingUsingStaticConfig_HTTPS_SMF_P0                          |
| Alternate_Routing_Using_Static_Configuration_Notification_CircuitBreaking. | SCP_AlternateRoutingUsingStaticConfig_NotificationMessageCircuitBreaking_P0 |
| Alternate_Routing_Using_Static_Configuration_SMF                           | SCP_AlternateRoutingUsingStaticConfig_SMF_P0                                |
| Alternate_Routing_Using_Static_Config_Overload_Control                     | SCP_AlternateRoutingUsingStaticConfig_OverloadControl_P0                    |
| SCP_Audit_nnrf_disc_SMF                                                    | SCP_Audit_nnrf-disc_SMF_P0                                                  |
| SCP_Audit_nnrf_nfm_SMF                                                     | SCP_Audit_nnrf-nfm_SMF_P0                                                   |
| SCP_Audit_nnrf_nfm_SMF_user_agent                                          | SCP_Audit_nnrfnfmSCPsUserAgentHeaderValidation_P0                           |
| Dns_Srv_Call_Back_Notification_CD_OD_Cases                                 | SCP_CallBackNotification_DNSSRVbasedCBOD_P0                                 |
| Callback_And_Notification                                                  | SCP_CallBackNotification_P0                                                 |
| SCP_CCA_Header_Validation_API_P0                                           | SCP_CCAvalidation_API_P0                                                    |
| CCA_validation_AUSF_P0                                                     | SCP_CCAvalidation_AUSF_P0                                                   |
| CCA_validation_AUSF_P1                                                     | SCP_CCAvalidation_AUSF_P1                                                   |
| CCA_validation_InterPLMN_CHF_P0                                            | SCP_CCAvalidation_InterPLMNRouting_CHF_P0                                   |
| CCA_validation_InterSCP_CHF_P0                                             | SCP_CCAvalidation_InterSCP_CHF_P0                                           |
| CCA_validation_ModelID_CHF_P0                                              | SCP_CCAvalidation_ModelID_CHF_P0                                            |
| CCA_validation_ModelID_CHF_P1                                              | SCP_CCAvalidation_ModelID_CHF_P1                                            |
| SCP_Circuit_Breaking_Config_API                                            | SCP_CircuitBreaking_ConfigAPI_P0                                            |
| Circuit_Breaking_PCF                                                       | SCP_CircuitBreaking_PCF_P0                                                  |
| Circuit_Breaking_SMF                                                       | SCP_CircuitBreaking_SMF_P0                                                  |
| SCP_Congestion_Control_Config_API                                          | SCP_CongestionControl_ConfigAPI_P0                                          |
| S_Correlation_Header_interplmn_model_C                                     | SCP_CorrelationHeader_InterPLMNModelC_P0                                    |
| Correlation_Headersepp_model_D_Inter_PLMN_and_Mediation                    | SCP_CorrelationHeader_InterPLMNRoutingBasedOnModelDandMediation_P0          |
| Interscp_Correlation_Header_model_C                                        | SCP_CorrelationHeader_InterSCP_P0                                           |
| Correlation_Header_model_C_cases                                           | SCP_CorrelationHeader_ModelC_P0                                             |
| Notification_Correlation_Header_model_C                                    | SCP_CorrelationHeader_ModelCNotificationRequest_P0                          |
| Correlation_Header_SCP_generated_error                                     | SCP_CorrelationHeader_SCPGeneratedError_P0                                  |
| DefaultNotificationCallbackInitialRouteAndDiscovery_p0                     | SCP_DefaultNotificationCallback_InitialRouteAndDiscovery_P0                 |
| Dns_Srv_Call_Back_Notification_Https                                       | SCP_DefaultNotificationCallbackUri_DNSSRV_HTTPS_P0                          |
| Dns_Srv_Call_Back_Notification                                             | SCP_DefaultNotificationCallbackUri_DNSSRV_P0                                |
| DefaultNotificationCallbackUriModelC_Https_p1                              | SCP_DefaultNotificationCallbackUri_ModelC_HTTPS_P1                          |
| DefaultNotificationCallbackUriModelC_p0                                    | SCP_DefaultNotificationCallbackUri_ModelC_P0                                |
| DefaultNotificationCallbackUriModelC_p1                                    | SCP_DefaultNotificationCallbackUri_ModelC_P1                                |
| DefaultNotificationCallbackUriModelC_CB_p0                                 | SCP_DefaultNotificationCallbackUri_ModelCCB_P0                              |
| DefaultNotificationCallbackUriModelC_SEPP_p1                               | SCP_DefaultNotificationCallbackUri_ModelCInterPLMNRouting_P1                |
| DefaultNotificationCallbackUriModelC_SEPP_p1                               | SCP_DefaultNotificationCallbackUri_ModelCInterPLMNRouting_P1                |
| Alternate_resolution_api_validation                                        | SCP_DNSSRV_AlternateResolution_API_P0                                       |
| Dns_Srv_Based_Routing_For_ModelC_Headers_PCF_cases                         | SCP_DNSSRV_ModelCHeaders_PCF_P0                                             |

Table 4-7 (Cont.) Regression Feature File

| Feature Names prior to SCP 24.1.0                                        | New Feature Names for SCP 24.1.0                                           |
|--------------------------------------------------------------------------|----------------------------------------------------------------------------|
| Dns_Srv_Based_Routing_For_ModelC_Headers_UDM_cases                       | SCP_DNSSRV_ModelCHeaders_UDM_P0                                            |
| Dns_Srv_Producer_Overload_Control                                        | SCP_DNSSRV_ProducerBasedOverloadControl_P0                                 |
| Alert_egress_congestion_based_on_producer_load_and_message_priority_CHF  | SCP_EgressCongestionBasedOnProducerLoad_AlertMessagePriority_CHF_P0        |
| Egress_congestion_based_on_producer_load_and_message_priority_PCF        | SCP_EgressCongestionBasedOnProducerLoad_MessagePriority_PCF_P0             |
| Egress_congestion_based_on_producer_load_and_message_priority_UDM        | SCP_EgressCongestionBasedOnProducerLoad_MessagePriority_UDM_P0             |
| SCP_Egress_Host_Preference_alternate_routing_SMF_P0_P1                   | SCP_EgressHostPreference_AlternateRouting_SMF_P1                           |
| SCP_Egress_Host_Preference_alternate_routing_withoutHeader_AUSF_P1       | SCP_EgressHostPreference_AlternateRoutingWithoutHeader_AUSF_P1             |
| SCP_Egress_Host_Preference_API_P0                                        | SCP_EgressHostPreference_API_P0                                            |
| SCP_Egress_Host_Preference_CHF_P0                                        | SCP_EgressHostPreference_CHF_P0                                            |
| SCP_Egress_Host_Preference_CHF_P1                                        | SCP_EgressHostPreference_CHF_P1                                            |
| SCP_Egress_Host_Preference_InterPLMN_Routing_P0                          | SCP_EgressHostPreference_InterPLMNRouting_P0                               |
| SCP_Egress_Host_Preference_InterPLMN_Routing_P1                          | SCP_EgressHostPreference_InterPLMNRouting_P1                               |
| SCP_Egress_Host_Preference_InterPLMN_Routing_Non_ASM_P0                  | SCP_EgressHostPreference_InterPLMNRoutingNonASM_P0                         |
| SCP_Egress_Host_Preference_InterSCP_Routing_CHF_P0                       | SCP_EgressHostPreference_InterSCP Routing_CHF_P0                           |
| SCP_Egress_Host_Preference_InterSCP_Routing_CHF_P1                       | SCP_EgressHostPreference_InterSCP Routing_CHF_P1                           |
| SCP_Egress_Host_Preference_InterSCP_Routing_CHF_Non_ASM_P0               | SCP_EgressHostPreference_InterSCP RoutingNonASM_CHF_P0                     |
| SCP_Egress_Host_Preference_ModelID_routing_CHF_NRF_P0                    | SCP_EgressHostPreference_ModelIDRoutingCHF_NRF_P0                          |
| SCP_Egress_Host_Preference_ModelID_routing_CHF_NRF_P1                    | SCP_EgressHostPreference_ModelIDRoutingCHF_NRF_P1                          |
| SCP_Egress_Host_Preference_ModelID_routing_without_apiRootHdr_CHF_NRF_P1 | SCP_EgressHostPreference_ModelIDRoutingWithoutAPIRootHdrCHFandNRF_P1       |
| SCP_Egress_Host_Preference_Notification_PCF                              | SCP_EgressHostPreference_NotificationRequest_PCF_P0                        |
| SCP_Egress_Host_Preference_SCP_Generated_Audit_SMF_NRF_P1                | SCP_EgressHostPreference_SCPGeneratedAuditSMF_NRF_P1                       |
| SCP_Egress_Host_Preference_SMF_P0_P1                                     | SCP_EgressHostPreference_SMF_P1                                            |
| SCP_Egress_Host_Preference_SCP_Generated_Subscription_SCP_NRF_P1         | SCP_EgressHostPreference_SCPgeneratedSubscription_NRF_P1                   |
| Alert_SCPEgressTrafficRateExceededConfiguredLimit_AUSF                   | SCP_EgressRateLimiting_AlertTrafficRateExceededConfiguredLimit_AUSF_P0     |
| Alert_SCPEgressTrafficRoutedWithoutRateLimitTreatment_AUSF               | SCP_EgressRateLimiting_AlertTrafficRoutedWithoutRateLimitTreatment_AUSF_P0 |
| Egress_Rate_Limiting_Config_API                                          | SCP_EgressRateLimiting_Config_API_P0                                       |
| EgressRateLimiting_INTERSCP                                              | SCP_EgressRateLimiting_InterSCP_P0                                         |
| EgressRateLimiting                                                       | SCP_EgressRateLimiting_P0                                                  |
| EgressRateLimiting_UDM_Cases                                             | SCP_EgressRateLimiting_UDM_P0                                              |
| RateLimitingRelease16_AUSF                                               | SCP_EgressRateLimitingRelease16_AUSF_P0                                    |
| SCP_EgressRateLimiting_DNSSRV.feature                                    | SCP_EgressRateLimiting_DNSSRV_P0.feature                                   |

Table 4-7 (Cont.) Regression Feature File

| Feature Names prior to SCP 24.1.0                                                       | New Feature Names for SCP 24.1.0                                             |
|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------|
| Enhanced_Suspended_State_Routing_API_Validation                                         | SCP_EnhancedSuspendedStateRouting_API_P0                                     |
| Enhanced_Suspended_State_Routing_Alternate_Routing_Using_Static_Config_DNS_SRV          | SCP_EnhancedSuspendedStateRouting_ARusingStaticConfigandDNSSRV_P0            |
| Enhanced_Suspended_State_Routing_Inter_PLMN                                             | SCP_EnhancedSuspendedStateRouting_InterPLMNRouting_P0                        |
| Enhanced_Suspended_State_Routing_Mode2_API_Validation_P0                                | SCP_EnhancedSuspendedStateRouting_Mode2_API_P0                               |
| Enhanced_Suspended_State_Routing_Mode2_Alternate_Routing_Using_Static_Config_DNS_SRV_P0 | SCP_EnhancedSuspendedStateRouting_Mode2AlternateRoutingStaticConfigDNSSRV_P0 |
| Enhanced_Suspended_State_Routing_Mode2_ModelC_SMF_P1                                    | SCP_EnhancedSuspendedStateRouting_Mode2ModelC_SMF_P1                         |
| Enhanced_Suspended_State_Routing_Mode2_ModelC_Inter_PLMN_P0                             | SCP_EnhancedSuspendedStateRouting_Mode2ModelCInterPLMN_P0                    |
| Enhanced_Suspended_State_Routing_Mode2_ModelC_InterSCP_P0                               | SCP_EnhancedSuspendedStateRouting_Mode2ModelCInterSCP_P0                     |
| Enhanced_Suspended_State_Routing_Mode2_ModelC_Overload_Congestion_SMF_P1                | SCP_EnhancedSuspendedStateRouting_Mode2ModelCOverloadCongestion_SMF_P1       |
| Enhanced_Suspended_State_Routing_Mode2_ModelID_P0                                       | SCP_EnhancedSuspendedStateRouting_Mode2ModelID_P0                            |
| Enhanced_Suspended_State_Routing_Mode2_ModelID_Inter_PLMN_P0                            | SCP_EnhancedSuspendedStateRouting_Mode2ModelIDInterPLMNRouting_P0            |
| Enhanced_Suspended_State_Routing_Mode2_ModelID_InterSCP_P0                              | SCP_EnhancedSuspendedStateRouting_Mode2ModelIDInterSCP_P0                    |
| Enhanced_Suspended_State_Routing_ModelC_SMF                                             | SCP_EnhancedSuspendedStateRouting_ModelC_SMF_P0                              |
| Enhanced_Suspended_State_Routing_Parallel_ModelC_SMF_UDM_P0                             | SCP_EnhancedSuspendedStateRouting_ModelC_SMFandUDM_P0                        |
| Enhanced_Suspended_State_Routing_ModelC_UDM                                             | SCP_EnhancedSuspendedStateRouting_ModelC_UDM_P0                              |
| Enhanced_Suspended_State_Routing_Model_C_Inter_SCP                                      | SCP_EnhancedSuspendedStateRouting_ModelCInterSCP_P0                          |
| Enhanced_Suspended_State_Routing_ModelID                                                | SCP_EnhancedSuspendedStateRouting_ModelID_P0                                 |
| Enhanced_Suspended_State_Routing_ModelID_InterSCP                                       | SCP_EnhancedSuspendedStateRouting_ModelIDInterSCP_P0                         |
| Enhanced_NF_Status_Processing_SUSPENDED                                                 | SCP_EnhancedSuspendedStateRouting_SuspendedMode2_P0                          |
| Enhanced_NF_Status_Processing_SUSPENDED_SMF                                             | SCP_EnhancedSuspendedStateRouting_SuspendedMode2_SMF_P0                      |
| Enhanced_NF_Status_Processing_UNDISCOVERABLE                                            | SCP_EnhancedSuspendedStateRouting_UNDISCOVERABLE_P0                          |
| SCP_Error_Profile_Config_API_P0                                                         | SCP_ErrorProfile_ConfigAPI_P0                                                |
| SCPFailureHandling_default_behavior_serverheader_AUSF                                   | SCP_FailureHandling_DefaultBehaviorServerHeader_AUSF_P0                      |
| SCPFailureHandling_default_behavior_serverheader                                        | SCP_FailureHandling_DefaultBehaviorServerHeader_P0                           |
| SCPFailureHandling_DNSSRV_based_EnhancedServerHeaderV2_NEF_p0                           | SCP_FailureHandling_DNSSRVbasedEnhancedServerHeaderV2_NEF_P0                 |
| SCPFailureHandling_EnhancedServerHeader                                                 | SCP_FailureHandling_EnhancedServerHeader_P0                                  |
| SCPFailureHandling_EnhancedServerHeaderV2_API                                           | SCP_FailureHandling_EnhancedServerHeaderV2_API_P0                            |
| SCPFailureHandling_EnhancedServerHeaderV2_p0                                            | SCP_FailureHandling_EnhancedServerHeaderV2_P0                                |
| SCPFailureHandling_EnhancedServerHeaderV2_p1                                            | SCP_FailureHandling_EnhancedServerHeaderV2_P1                                |

Table 4-7 (Cont.) Regression Feature File

| Feature Names prior to SCP 24.1.0                                             | New Feature Names for SCP 24.1.0                                       |
|-------------------------------------------------------------------------------|------------------------------------------------------------------------|
| FailureHandling_InterSCP_EnhancedServerHeader                                 | SCP_FailureHandling_InterSCPEnhancedServerHeader.P0                    |
| FormUrlEncoded                                                                | SCP_FormUrlEncoded_P0                                                  |
| Global_Egress_Rate_Limiting_Config_API                                        | SCP_GlobalEgressRateLimiting_API_P0                                    |
| GlobalEgressRateLimiting_P0                                                   | SCP_GlobalEgressRateLimiting_P0                                        |
| SCP_HealthCheck_Support_API_P0                                                | SCP_HealthCheckSupport_API_P0                                          |
| SCP_HealthCheck_Support_HTTPS_P0                                              | SCP_HealthCheckSupport_HTTPS_P0                                        |
| SCP_HealthCheckInterSCPModelC_HTTPS_P0                                        | SCP_HealthCheckSupport_InterSCPModelC_HTTPS_P0                         |
| SCP_HealthCheckInterSCPModelC_P0                                              | SCP_HealthCheckSupport_InterSCPModelC_P0                               |
| SCP_HealthCheckInterSCPModelD_P0                                              | SCP_HealthCheckSupport_InterSCPModelD_P0                               |
| Alert_SCPIngressTrafficRateExceededConfiguredLimit                            | SCP_IngressRateLimiting_AlertTrafficRateExceededConfiguredLimit_P      |
| Alert_SCPIngressTrafficRoutedWithoutRateLimitTreatment                        | SCP_IngressRateLimiting_AlertTrafficRoutedWithoutRateLimitTreatment_P0 |
| Ingress_Rate_Limiting_Config_API                                              | SCP_IngressRateLimiting_API_P0                                         |
| Ingress_Rate_Limiting_Config_API_SC1                                          | SCP_IngressRateLimiting_ConfigAPI_P0                                   |
| Ingress_Rate_Limiting_Config_API_enhancement_for_nflnstanceId                 | SCP_IngressRateLimiting_ConfigAPIenhancementNFInstanceId_P0            |
| Ingress_Rate_Limiting_enhancement_for_nflnstanceId_to_support_UserAgentHeader | SCP_IngressRateLimiting_NFInstanceIdEnhancementUserAgentHeader_P0      |
| SEPP_Audit_nnrf_nfm                                                           | SCP_InterPLMNRouting_Audit_nnrf-nfm_P0                                 |
| SCP-SEPP_ModelID_Routing                                                      | SCP_InterPLMNRouting_ModelIDBased_P0                                   |
| SEPP_Routing_NRF                                                              | SCP_InterPLMNRouting_NRF_P0                                            |
| OutlierDetectionSepp_P0                                                       | SCP_InterPLMNRouting_OutlierDetection_P0                               |
| SCP-SEPP_Routing                                                              | SCP_InterPLMNRouting_P0                                                |
| SEPP_plmnInfo_DELETE_API                                                      | SCP_InterPLMNRouting_PLMNInfoDeleteAPI_P0                              |
| SEPP_plmnInfo_GET_API                                                         | SCP_InterPLMNRouting_PLMNInfoGetAPI_P0                                 |
| SEPP_plmnInfo_PATCH_API                                                       | SCP_InterPLMNRouting_PLMNInfoPatchAPI_P0                               |
| SEPP_plmnInfo_PUT_API                                                         | SCP_InterPLMNRouting_PLMNInfoPutAPI_P0                                 |
| SCP-SEPP_Routing_UDM                                                          | SCP_InterPLMNRouting_UDM_P0                                            |
| Rel16_Inter_SCP_Audit_nnrf_nfm_p0                                             | SCP_InterSCP_Audit_nnrf-nfm_P0                                         |
| InterSCP_MateInfoListRouting                                                  | SCP_InterSCP_MateInfoListRouting_P0                                    |
| Inter_SCP_Routing_NplusK_p0                                                   | SCP_InterSCP_NplusKRouting_P0                                          |
| Inter_SCP_Subscription_SMF_NRF                                                | SCP_InterSCP_SubscriptionWithForeignNRFforNFTypeSMF_P0                 |
| Inter_SCP_Routing                                                             | SCP_InterSCP Routing_P0                                                |
| Jaeger_Api_Validation                                                         | SCP_Jaeger_API_P0                                                      |
| SCP_LCI_Support_Config_API                                                    | SCP_LCIsupport_API_P0                                                  |
| Scp_Lci_Support_InterPLMN                                                     | SCP_LCIsupport_InterPLMNRouting_P0                                     |
| SCP_Lci_Support_InterSCP                                                      | SCP_LCIsupport_InterSCP_P0                                             |
| SCP_Lci_Support_InterSCP_PCF_SCP                                              | SCP_LCIsupport_InterSCP_PCF_P0                                         |
| SCP_Lci_Support_InterSCP_UDM                                                  | SCP_LCIsupport_InterSCP_UDM_P0                                         |
| SCP_Lci_Support_Miscellaneous                                                 | SCP_LCIsupport_Miscellaneous_P0                                        |
| Scp_Lci_Support_ModelID                                                       | SCP_LCIsupport_ModelID_P0                                              |
| Scp_Lci_Support_ModelID_notification_cases                                    | SCP_LCIsupport_ModelIDNotificationRequest_P0                           |

Table 4-7 (Cont.) Regression Feature File

| Feature Names prior to SCP 24.1.0                                        | New Feature Names for SCP 24.1.0                                        |
|--------------------------------------------------------------------------|-------------------------------------------------------------------------|
| SCP_Lci_Support                                                          | SCP_LCIsupport_P0                                                       |
| Local_N_Plus_K                                                           | SCP_LocalNplusK_P0                                                      |
| Location_hdr_update_for_host_mismatch_API_validation                     | Location_hdr_update_for_host_mismatch_API_validation                    |
| App_Routing_Options_Config_API                                           | SCP_Mediation_AppRoutingOptionsConfig_API_P0                            |
| SCP_Mediation_Config_API                                                 | SCP_Mediation_ConfigAPI_P0                                              |
| SCP_Mediation_Worker_side_cases_PCF_Cases                                | SCP_Mediation_FunctionalCases_PCF_P0                                    |
| SCP_Mediation_Cases_AUSF                                                 | SCP_Mediation_FunctionalCasesPart1_AUSF_P0                              |
| SCP_Mediation_Worker_side_cases_AUSF                                     | SCP_Mediation_FunctionalCasesPart2_AUSF_P0                              |
| SCP_Mediation_Worker_side_cases_UDM_SMF                                  | SCP_Mediation_FunctionalTestCases_UDMandSMF_P0                          |
| SCP_Mediation_Worker_side_cases_UDM_AUSF_SMF_Notification_cases          | SCP_Mediation_FunctionalTestCasesForUDMnAUSFnSMFnNotificationRequest_P0 |
| SCP_Mediation_Cases_PCF                                                  | SCP_Mediation_PCF_P0                                                    |
| Alert_SCPRoutingFailedForProducer_CHF                                    | SCP_ModelC_AlertSCPRoutingFailedForProducer_CHF_P0                      |
| ModelC_allheaderRequest                                                  | SCP_ModelC_AllHeaderRequest_P0                                          |
| PCF_AMPolicy_forwardRoute_Target_apiRoot                                 | SCP_ModelC_AMPolicyTargetAPIRoot_PCF_P0                                 |
| ModelC_CatchAll_Routing_Configuration_AUSF                               | SCP_ModelC_CatchAllRoutingConfiguration_AUSF_P0                         |
| ModelC_Direct_Routing_Configuration_AUSF                                 | SCP_ModelC_DirectRoutingConfiguration_AUSF_P0                           |
| ModelC_ProducerOverloadControl                                           | SCP_ModelC_EgressCongestionBasedOnProducerLoad_P0                       |
| Egress_Congestion_based_on_load_PCF_SMPolicy_forwardRoute_Target_apiRoot | SCP_ModelC_EgressCongestionBasedOnProducerLoad_PCF_P0                   |
| Https_Routing_For_ModelC_Headers                                         | SCP_ModelC_HTTPS_P0                                                     |
| ModelC_IngressRateLimiting                                               | SCP_ModelC_IngressRateLimiting_P0                                       |
| Model-C_based_Inter_SCP_Routing                                          | SCP_ModelC_InterSCProuing_P0                                            |
| ModelC_Inter_SCP_Routing_Options_Notification_Cases                      | SCP_ModelC_InterSCPRoutingOptionsNotificationCases_P0                   |
| InterSCP_VersionSupport                                                  | SCP_ModelC_InterSCPVersionSupport_P0                                    |
| ModelC_NFInstance_AUSF_Cases                                             | SCP_ModelC_NFInstance_AUSF_P0                                           |
| ModelC_NFInstance_NEF_Cases                                              | SCP_ModelC_NFInstance_NEF_P0                                            |
| NF_Notification                                                          | SCP_ModelC_NFprofileNotificationWithMultipleVersions_P                  |
| ModelC_NFSet_NEF_Cases                                                   | SCP_ModelC_NFSet_NEF_P0                                                 |
| ModelC_NFSet_PCF_Cases                                                   | SCP_ModelC_NFSet_PCF_P0                                                 |
| ModelC_NFSet_SMF_Cases                                                   | SCP_ModelC_NFSet_SMF_P0                                                 |
| ModelC_ReverseLookup_CHF_Cases                                           | SCP_ModelC_ReverseLookup_CHF_P0                                         |
| ModelC_ReverseLookup_UDM_Cases                                           | SCP_ModelC_ReverseLookup_UDM_P0                                         |
| ModelC_ReverseLookup_UDR_Cases                                           | SCP_ModelC_ReverseLookup_UDR_P0                                         |
| ModelC_Inter_SCP_Routing_Options                                         | SCP_ModelC_RoutingOptionsInterSCP_P0                                    |
| AUSF_AUTH_forwardRoute_Target_apiRoot                                    | SCP_ModelC_TargetAPIRoot_AUSF_P0                                        |
| CHF_SLC_forwardRoute_Target_apiRoot                                      | SCP_ModelC_TargetAPIRoot_CHF_P0                                         |
| SMF_forwardRoute_Target_apiRoot                                          | SCP_ModelC_TargetAPIRoot_SMF_P0                                         |
| UDM_SDM_forwardRoute_Target_apiRoot                                      | SCP_ModelC_TargetAPIRootSDM_UDM_P0                                      |
| UDM_UECM_forwardRoute_Target_apiRoot                                     | SCP_ModelC_TargetAPIRootUECM_UDM_P0                                     |
| Version_support                                                          | SCP_ModelC_VersionSupport_P0                                            |
| ModelD_Config_API                                                        | SCP_ModelID_API_P0                                                      |
| ModelD_enforceReqSpecificSvcDiscovery                                    | SCP_ModelID_EnforceReqSpecificSvcDiscovery_P0                           |



Table 4-7 (Cont.) Regression Feature File

| Feature Names prior to SCP 24.1.0                                    | New Feature Names for SCP 24.1.0                                                            |
|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| ModelID_based_Routing_implicit_notification_p0                       | SCP_ModelID_ImplicitNotificationRouting_P0                                                  |
| ModelID_based_Routing                                                | SCP_ModelID_Routing_P0                                                                      |
| Notification_Patch_Profile_Support_SMF                               | SCP_NotificationRequest_PatchProfileSupport_SMF_P0                                          |
| SCP_Oauth2_Access_Token_Granularity_Config_API_P0                    | SCP_Oauth2Support_AccessTokenGranularity_API_P0                                             |
| SCP_Oauth2_Support_Alternative_Config_ModelID_SMF_NRF_P0             | SCP_Oauth2Support_AlternativeConfigModelID_SMFandNRF_P0                                     |
| SCP_Oauth2_Granularity_config_ModelID_SMF_NRF_P0                     | SCP_Oauth2Support_GranularityConfigModelID_SMFandNRF_P0                                     |
| SCP_Oauth2_Local-PLMN-required-config_API_P0                         | SCP_Oauth2Support_LocalPLMNRequiredConfig_API_P0                                            |
| SCP_OAuth2_support_ModelIC_CHF_P0                                    | SCP_Oauth2Support_ModelIC_CHF_P0                                                            |
| Scp_Oauth2_Support_ModelIC_SMF_NRF_P0                                | SCP_Oauth2Support_ModelIC_SMFandNRF_P0                                                      |
| SCP_OAuth2_Support_Config_API_P0                                     | SCP_OAuth2Support_ConfigAPI_P0                                                              |
| SCP_Oauth2_Support_ModelIC_Error_Handling_CHF_NRF_P1                 | SCP_Oauth2Support_ModelICErrorHandling_CHFandNRF_P1                                         |
| SCP_Oauth2_Support_ModelID_SMF_NRF_P0_P1                             | SCP_Oauth2Support_ModelID_SMFandNRF_P1                                                      |
| SCP_Oauth2_Support_ModelID_interSCP_P0                               | SCP_Oauth2Support_ModelIDinterSCP_P0                                                        |
| SCP_Oauth2_NRF_Configuration_Config_API_P0                           | SCP_Oauth2Support_NRFConfiguration_API_P0                                                   |
| SCP_Observability_And_Inter_Microservice_Resilience_P0               | SCP_ObservabilityAndInterMicroserviceResilience_P0                                          |
| SCP_OutlierDetection_API                                             | SCP_OutlierDetection_API_P0                                                                 |
| OutlierDetectionInterSCP_P0                                          | SCP_OutlierDetection_InterSCP_P0                                                            |
| OutlierDetectionProducer_AUSF_P0                                     | SCP_OutlierDetection_ProducerAUSF_P0                                                        |
| PseudoHeadersModification                                            | SCP_PseudoHeadersModification_P0                                                            |
| PseudoHeadersModificationHttps                                       | SCP_PseudoHeadersModification_HTTPS_P0                                                      |
| NRF_Registration                                                     | SCP_RegistrationWithNRF_P0                                                                  |
| SCP_Registration_With_PLMNList                                       | SCP_RegistrationWithNRF_PLMNList_P0                                                         |
| Scp_profile_mateScplInfo_update                                      | SCP_RegistrationWithNRF_ProfileMateSCPInfoUpdate_P0                                         |
| Rel16_Canary_support_PCF_Cases                                       | SCP_Rel16CanarySupport_PCF_P0                                                               |
| Rel16_Canary_support_SMF_Cases                                       | SCP_Rel16CanarySupport_SMF_P0                                                               |
| Rel16_Canary_support_UDM_Cases                                       | SCP_Rel16CanarySupport_UDM_P0                                                               |
| Re_routing_based_on_configurable_http_status_codes_api_validation_p0 | SCP_ReroutingBasedonConfigurableHttpStatusCodes_API_P0                                      |
| Re_routing_based_on_configurable_http_status_codes_p0                | SCP_ReRoutingBasedOnConfigurableHttpStatusCodes_P0                                          |
| SCP_Ro_Enhancments_For_CB_CC_SMF_P0                                  | SCP_RoutingOptionEnhancements_CBAndCongestionControl_SMF_P0                                 |
| SCP_Ro_Enhancments_For_CB_CC_InterSCP_InterPLMN_SMF_PCF_P0           | SCP_RoutingOptionEnhancements_CBAndCongestionControlForInterPLMNandSCP_Routing_SMFandPCF_P0 |
| SCP_Ro_Enhancment_For_CC_CB_Notification_PCF_P0                      | SCP_RoutingOptionEnhancements_CBAndCongestionControlForNotificationReq_PCF_P0               |
| SCP_Notification_Routing_Option_Config_API                           | SCP_RoutingOptionForNotificationReq_API_P0                                                  |
| SCP_Routing_Option_Set_API                                           | SCP_RoutingOptionForNotificationReq_RoutingConfigSet_API_P0                                 |
| Routing_Rules_API_R16                                                | SCP_RoutingRules_R16_API_P0                                                                 |
| Sbi_Message_Priority_Config_API                                      | SCP_SBImessagePriority_ConfigAPI_P0                                                         |
| SbiMessagePriority                                                   | CP_SBImessagePriority_P0                                                                    |
| SCP_Features_API                                                     | SCP_SCPFeatures_API_P0                                                                      |



**Table 4-7 (Cont.) Regression Feature File**

| Feature Names prior to SCP 24.1.0                             | New Feature Names for SCP 24.1.0                             |
|---------------------------------------------------------------|--------------------------------------------------------------|
| SCP_Generated_Error_Codes_SMF                                 | SCPGeneratedErrorCodes_SMF_P0                                |
| SCP_Generated_Error_Codes_UDM                                 | SCP_SCPGeneratedErrorCodes_UDM_P0                            |
| NRF_Subscription                                              | SCP_Subscription_SubscriptionWithNRFforNfTypeUDM_P0          |
| Configurataion_Support_For_NEF_services_NEF_P1                | SCP_SupportForNEFservices_Configuration_APIs_P1              |
| Support_For_NEF_services_NEF_Enhanced_NF_Status_P0            | SCP_SupportForNEFservices_EnhancedSuspendedStateRouting_P0   |
| Support_For_NEF_services_NEF_SEPP_P0                          | SCP_SupportForNEFservices_InterPLMNRouting_P0                |
| Support_For_NEF_services_NEF_P0                               | SCP_SupportForNEFservices_NEF_P0                             |
| Support_For_NEF_services_NEF_NRF_SCP_p0                       | SCP_SupportForNEFservices_NRF_P0                             |
| Traffic_Feed_REST_API                                         | SCP_TrafficFeed_API_P0                                       |
| TrafficFeed_CB                                                | SCP_TrafficFeed_CB_P0                                        |
| TrafficFeed_Notification                                      | SCP_TrafficFeed_NotificationRequest_P0                       |
| TrafficFeed_PCF                                               | SCP_TrafficFeed_PCF_P0                                       |
| TrafficFeed_UDM                                               | SCP_TrafficFeed_UDM_P0                                       |
| Consumer_Info_API                                             | SCP_UserAgent_ConsumerInfo_API_P0                            |
| Scp_User_Agent_Info_API                                       | SCP_UserAgent_Info_API_P0                                    |
| Worker_Pod_Overload_Action_Policy_Config_API                  | SCP_WorkerPodOverLoadControl_ActionPolicy_API_P0             |
| CPUOverloadCtrlByNoAction                                     | SCP_WorkerPodOverLoadControl_CPUbasedNoAction_P0             |
| Worker_Pod_Overload_Ctrl_Policy_Config_API                    | SCP_WorkerPodOverLoadControl_CtrlPolicy_API_P0               |
| Worker_Pod_Overload_Discard_Policy_Config_API                 | SCP_WorkerPodOverLoadControl_DiscardPolicy_API_P0            |
| Worker_Traffic_Pod_Overload_P0                                | SCP_WorkerPodOverLoadControl_PendingTransaction_P0           |
| Worker_Traffic_Pod_Overload_P1                                | SCP_WorkerPodOverLoadControl_PendingTransaction_P1           |
| API_Worker_Pod_Pending_Transaction_Overload_Config_P0.feature | SCP_WorkerPodOverLoadControl_PendingTransactionConfig_API_P0 |
| SCP_1_12_0_Bug_Fixes                                          | SCP_1_12_0_BugFixes_P0                                       |
| SCP_1.9.0_Bug_Fixes_SMF                                       | SCP_1.9.0_BugFixes_SMF_P0                                    |
| SCP_1.9.0_Bug_Fixes_UDR                                       | SCP_1.9.0_BugFixes_UDR_P0                                    |
| SCP_22.2.0_Bug_Fixes_PCF_Cases                                | SCP_22.2.0_BugFixes_PCF_P0                                   |
| SCP_22.2.0_Bug_Fixes_UDM_Cases                                | SCP_22.2.0_BugFixes_UDM_P0                                   |
| SCP_22.3.0_Bug_Fixes                                          | SCP_22.3.0_BugFixes_P0                                       |
| SCP_22.3.1_Bug_Fixes                                          | SCP_22.3.1_BugFixes_P0                                       |
| 22.4.0_Bug_Fixes                                              | SCP_22.4.0_BugFixes_P0                                       |
| 22.4.0_Bug_Fixes_Mediation                                    | SCP_22.4.0_Bug_Fixes_Mediation                               |
| 22.4.4_Bug_Fixes                                              | SCP_22.4.4_BugFixes_PCF_P0                                   |
| 23.1.0_Bug_Fixes                                              | SCP_23.1.0_BugFixes_P0                                       |
| 23.2.0_Bug_Fixes_HTTPS                                        | SCP_23.2.0_BugFixes_HTTPS_P0                                 |
| 23.2.0_Bug_Fixes                                              | SCP_23.2.0_BugFixes_P0                                       |

The following table displays the ATS Regression feature tests that have been split into SingleIpEndpoint and MultipleIpEndpoint categories, and renamed accordingly:

**Table 4-8 ATS Regression Feature Tests**

| Feature Test Name before Splitting                          | Feature Test Name after Splitting                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCP_SupportForNEFservices_EnhancedSuspendedStateRouting_P0  | <ul style="list-style-type: none"> <li>SCP_SupportForNEFservices_SingleIpEndpoint_EnhancedSuspendedStateRouting_P0</li> <li>SCP_SupportForNEFservices_MultipleIpEndpoint_EnhancedSuspendedStateRouting_P0</li> </ul>                                                                        |
| SCP_RoutingOptionEnhancements_CBAndCongestionControl_SMF_P0 | <ul style="list-style-type: none"> <li>SCP_RoutingOptionEnhancements_CBAndCongestionControl_SMF_P0</li> <li>SCP_RoutingOptionEnhancements_SingleIpEndpoint_CBAndCongestionControl_SMF_P0</li> <li>SCP_RoutingOptionEnhancements_MultipleIpEndpoint_CBAndCongestionControl_SMF_P0</li> </ul> |
| SCP_OutlierDetection_AUSF_P0                                | <ul style="list-style-type: none"> <li>SCP_OutlierDetection_MultipleIpEndpoint_AUSF_P0</li> <li>SCP_OutlierDetection_SingleIpEndpoint_AUSF_P0</li> </ul>                                                                                                                                    |
| SCP_Oauth2Support_GranularityConfigModelID_SMFandNRF_P0     | <ul style="list-style-type: none"> <li>SCP_Oauth2Support_GranularityConfigModelID_SMFandNRF_P0</li> <li>SCP_Oauth2Support_SingleIpEndpoint_GranularityConfigModelID_SMFandNRF_P0</li> <li>SCP_Oauth2Support_MultipleIpEndpoint_GranularityConfigModelID_SMFandNRF_P0</li> </ul>             |
| SCP_ModelC_NFInstance_NEF_P0                                | <ul style="list-style-type: none"> <li>SCP_ModelC_NFInstance_NEF_P0</li> <li>SCP_ModelC_SingleIpEndpoint_NFInstance_NEF_P0</li> <li>SCP_ModelC_MultipleIpEndpoint_NFInstance_NEF_P0</li> </ul>                                                                                              |
| SCP_LCIsupport_Miscellaneous_P0                             | <ul style="list-style-type: none"> <li>SCP_LCIsupport_Miscellaneous_P0</li> <li>SCP_LCIsupport_SingleIpEndpoint_Miscellaneous_P0</li> <li>SCP_LCIsupport_MultipleIpEndpoint_Miscellaneous_P0</li> </ul>                                                                                     |
| SCP_EgressHostPreference_InterSCPRoutingNonASM_CHF_P0       | <ul style="list-style-type: none"> <li>SCP_EgressHostPreference_SingleIpEndpointInterSCPRoutingNonASM_CHF_P0</li> <li>SCP_EgressHostPreference_MultipleIpEndpointInterSCPRoutingNonASM_CHF_P0</li> </ul>                                                                                    |
| SCP_DNSSRV_ModelCHeaders_PCF_P0                             | <ul style="list-style-type: none"> <li>SCP_DNSSRV_ModelC_SingleIpEndpoint_PCF_P0</li> <li>SCP_DNSSRV_ModelC_MultipleIpEndpoint_PCF_P0</li> </ul>                                                                                                                                            |
| SCP_AlternateRoutingUsingStaticConfig_SMF_P0                | <ul style="list-style-type: none"> <li>SCP_AlternateRoutingUsingStaticConfig_SMF_P0</li> <li>SCP_AlternateRoutingUsingStaticConfig_SingleIpEndpoint_SMF_P0</li> <li>SCP_AlternateRoutingUsingStaticConfig_MultipleIpEndpoint_SMF_P0</li> </ul>                                              |
| SCP_22.3.0_BugFixes_P0                                      | <ul style="list-style-type: none"> <li>SCP_22.3.0_BugFixes_SingleIpEndpoint_P0</li> <li>SCP_22.3.0_BugFixes_MultipleIpEndpoint_P0</li> </ul>                                                                                                                                                |

## 4.7 Running SEPP Test Cases using ATS

This section describes how to run SEPP test cases using ATS.

### 4.7.1 Prerequisites

To run SEPP Test Cases using SEPP ATS 24.2.4, you need to ensure that following prerequisites are fulfilled:

- Debug container should be DISABLED for all microservices during ATS runs.

- To run the ATS testcases, the user should not configure any value for apiPrefix key in ocsepp-custom-values.yaml file. It should be empty.
- The number of replicas of all SEPP microservices pods must be set to 1 as ATS is enabled to perform the metric validations for metrics obtained from a single pod.
- Create Kubernetes secret with certificates/keys (public and private) for both PLMN and N32 gateways before deploying SEPP.
- Deploy SEPP 24.2.4 with default helm configurations using helm charts.
- Ensure all microservices of SEPP are up and running.
- Create Kubernetes secret with certificates/keys (public and private) for ATS client and stub server microservices before deploying SEPP ATS.
- Update ocats\_ocsepp\_values\_24.2.4.yaml file with the latest secrets and certificates.
- Deploy ATS using helm charts.
- Ensure Prometheus service is up and running.(Optional)
- The user must not initiate a job in two different pipelines at the same time.
- User must not abort a running job, this may lead to data corruption in the database.
- The user needs to edit cn32f-svc and pn32f-svc deployment yaml. Set CACHE\_REFRESH\_TIMEOUT to 1000.
- User need to set n32cHandshakePlmnIdListValidationEnabled to true in localProfile section of ocsepp-custom-values.yaml file. Or n32cHandshakePlmnIdListValidationEnabled Parameter can also be changed after SEPP deployment by editing cn32c-svc and pn32c-svc deployment yaml.
- User needs to update the plmnIdList provided in the ATS installation guide to run the ATS testcases.
- The user needs to edit cn32f-svc and pn32f-svc deployment yaml. Set "TOPOLOGY\_HIDING\_CACHE\_REFRESH\_TIMEOUT" to 1000.
- The user needs to edit cn32f-svc and pn32f-svc deployment yaml. Set "SECURITY\_CACHE\_REFRESH\_TIMEOUT" to 1000.
- All the features are set to disable by default. Ensure that the features must be disabled while configuring SEPP ATS.
- The user needs to edit cn32f-svc, pn32f-svc, plmn-egress-gateway, and n32-egress-gateway deployment yaml. Set "REQUEST\_TIMEOUT" to 2000.
- The user needs to edit n32-ingress-gateway deployment yaml. Set "REQUEST\_TIMEOUT" to 5000.
- The user needs to edit configmap of n32-ingress-gateway. Set "requestTimeout" to 5000.
- The user needs to edit n32-ingress-gateway deployment yaml. SET "IDLE\_TIMEOUT" to 5000.
- The user needs to edit pn32f-svc deployment yaml. SET "EVICT\_SAN\_HEADER\_CACHE\_DELAY" to 100.
- The user needs to edit pn32f-svc deployment yaml. SET "NRF\_DISCOVERY\_CACHE\_REFRESH\_TIMEOUT" to 1000.
- To run the CAT3 testcases, user must have pre-installed coherence-svc while SEPP installation.
- For DNS SRV and SOR, plmn-egress-gateway should be deployed in REST mode.

- To run the DNS SRV testcases, user must have pre-installed alternate-route service while SEPP installation.
- To run the Load Sharing among Multiple Remote SEPP Nodes testcases, user must have pre-installed alternate-route service while SEPP installation.
- To run the Egress Rate Limiter testcases user must have enabled the Egress Rate Limiter feature while SEPP deployment. Also SET "EgressRateLimiterFlag" to true in `ocats_ocsepp_values_24.2.4.yaml`.
- To run the Ingress Rate Limiter testcases user must have enabled the Ingress Rate Limiter feature while SEPP deployment. Also SET "IngressRateLimiterFlag" to true in `ocats_ocsepp_values_24.2.4.yaml`.
- In case of ASM, update config manager port at the following path inside the BDD client pod:
  - In the `/var/lib/jenkins/ocsepp_tests/product_config/global.yaml` file, update config manager port to **9092**.
  - In the `/var/lib/jenkins/ocsepp_tests/custom_config/global.yaml` file, update config manager port to **9092**.
- In ASM mode, set `expose_tls_service` parameter to false in stubserver section of `ocats_ocsepp_values_24.2.4.yaml` file.

### Custom Folder Implementation

ATS provides custom test case folders (`cust_newfeatures`, `cust_regression` and `cust_performance`) using which you can add new test cases, remove unwanted test cases and modify existing test cases. It does not impact the original product packaged test cases available in the newfeatures, regression and performance folders. For more details, refer to [Custom Folder Implementation](#).

## 4.7.2 Logging into ATS

Before logging into ATS, you need to ensure that ATS is deployed successfully using Helm charts as shown below:

### ① Note

To modify default log in password, refer to [Modifying Login Password](#).

Figure 4-72 Pods

```
[root@general-cluster-master ~]# kubectl get po $n
```

| NAME                                                 | READY | STATUS  | RESTARTS | AGE |
|------------------------------------------------------|-------|---------|----------|-----|
| ocsepp-release-cn32c-svc-5f46898d8d-htf68            | 1/1   | Running | 0        | 89s |
| ocsepp-release-cn32f-svc-78798dd6fb-2fwnr            | 1/1   | Running | 0        | 89s |
| ocsepp-release-config-mgr-svc-647d8c845f-xh47s       | 1/1   | Running | 0        | 89s |
| ocsepp-release-n32-egress-gateway-7745b6746b-9dtcl   | 2/2   | Running | 0        | 89s |
| ocsepp-release-n32-egress-gateway-7745b6746b-mtfk6   | 2/2   | Running | 0        | 89s |
| ocsepp-release-n32-ingress-gateway-5b4dc467cc-87wzh  | 2/2   | Running | 0        | 89s |
| ocsepp-release-n32-ingress-gateway-5b4dc467cc-8td78  | 2/2   | Running | 0        | 88s |
| ocsepp-release-plmn-egress-gateway-568ffcdcc7-7zm7j  | 2/2   | Running | 0        | 88s |
| ocsepp-release-plmn-egress-gateway-568ffcdcc7-t9hbd  | 2/2   | Running | 0        | 89s |
| ocsepp-release-plmn-ingress-gateway-6b54cb9cfc-5bkz9 | 2/2   | Running | 0        | 88s |
| ocsepp-release-plmn-ingress-gateway-6b54cb9cfc-t2mc4 | 2/2   | Running | 0        | 88s |
| ocsepp-release-pn32c-svc-84c978bcd-5nn47             | 1/1   | Running | 0        | 88s |
| ocsepp-release-pn32f-svc-78c558947c-vfhnp            | 1/1   | Running | 0        | 87s |
| sepp-ats-rel-bddclient-76745c5547-wp28r              | 1/1   | Running | 0        | 12h |
| sepp-ats-rel-stubserver-2-7d56d9887c-smfkr           | 1/1   | Running | 0        | 89s |
| sepp-ats-rel-stubserver-3-77f7cc8688-r246j           | 1/1   | Running | 0        | 89s |
| sepp-ats-rel-stubserver-57c998d5b4-rc56f             | 1/1   | Running | 0        | 89s |
| sepp-mysql-54b7c5b99d-jzbt5                          | 1/1   | Running | 0        | 14h |

For more information on verifying ATS deployment, see [Verifying ATS Deployment](#).  
There are following ways to login to ATS GUI.

- When an external load balancer (metalLB in case of OCCNE) is available and an external IP Address is provided to the ATS service, login to ATS GUI using <External-IP>:8080.
- When an external IP Address is not provided to the ATS service, open the browser and provide the external IP Address of the worker node and nodeport of the ATS service to login to ATS GUI.  
<Worker-Node-IP>:<Node-Port-of-ATS>

#### Note

In the **Verifying ATS Deployment** screen, ATS nodeport is highlighted in red as 30076. For more details on ATS deployment, refer to **SEPP ATS Installation Procedure**.

- When ATS is installed with TLS enabled:
  - If the external load balancer IP is used in the ssl.conf file to open the ATS GUI then the URL will be "https://<IP>:<https\_nodeport>".
  - If the external load balancer IP or worker node IP is not present on the setup, then with the common name provided in the ssl.conf file, the user can open the ATS GUI. The user needs to do the ssh port forwarding and then need to update the common name (CN) in the etc/hosts/ file of the local machine against the localhost IP (127.0.0.1).
  - ATS GUI URL format:
    - \* https://127.0.0.1:<port-forwarding-port>
    - \* https://<common name>:<port-forwarding-port>

Open a browser and provide IP Address and port details as <Worker-Node-IP>:<NodePort-of-ATS> (As per the above example: 10.98.101.171:32013). The ATS login screen appears.

Figure 4-73 ATS Login

Oracle Communications Cloud Native Core - Automated Test Suite

Welcome to ATS!

Username

Password

☐ Keep me signed in

Sign in

To run ATS:

- Enter the **username** as 'seppuser' and **password** as 'sepppasswd'. Click **Sign in**. The following screen appears showing pre-configured pipelines for SEPP individually (3 Pipelines).

Figure 4-74 Pre-Configured Pipelines

Dashboard
 

[+ New Item](#)
[Build History](#)

Build Queue

No builds in the queue.

Build Executor Status

0/1

[Oracle Communications Cloud Native Core](#)
[Automated Test Suite](#)

CNCATS SEPP : 24.2.4

All

| S | W | Name ↓           | Last Success | Last Failure | Last Duration | F |
|---|---|------------------|--------------|--------------|---------------|---|
|   |   | SEPP-NewFeatures | N/A          | N/A          | N/A           |   |
|   |   | SEPP-Regression  | N/A          | N/A          | N/A           |   |

Icon: S M L

- SEPP-NewFeatures:** This pipeline has all the test cases that are delivered as part of SEPP ATS - 24.2.x

- **SEPP-Regression:** This pipeline has all the test cases of previous releases.
- **SEPP-HealthCheck:** This pipeline has the utility to run the helm test functionality.

**Note**


Currently, SEPP does not have any performance pipeline.

### 4.7.3 SEPP-NewFeatures Pipeline

After identifying the SEPP pipelines, the user needs to do one-time configuration in ATS as per their SUT deployment. In this pipeline, all the new test cases related to SEPP are run. To configure its parameters:


1. Click **SEPP-NewFeatures** in the Name column. The following screen appears:

**Figure 4-75 SEPP-NewFeatures Pipeline**

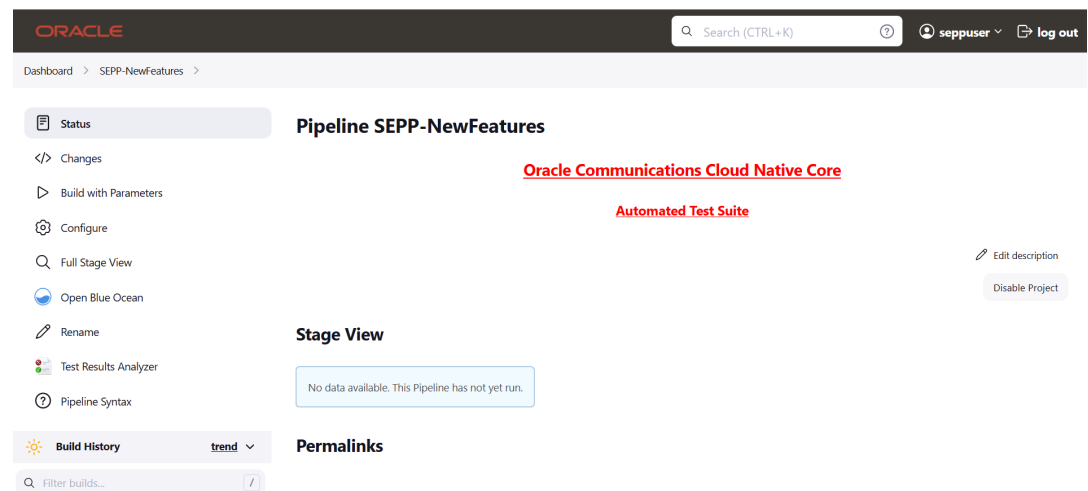

In the above screen:

- Click **Configure** to configure SEPP-New Features.
  - Click **Documentation** to view the documented test cases which are part of this SEPP release.
  - Click blue dots inside **Build History** box to view the success console logs of the "All" and "Sanity" respectively.
  - The **Stage View** shows pipeline that is already run for the customer reference.
  - Click **Open Blue Ocean** to view the respective group, re-run logs and the consolidated report summary.
2. Click **Configure**. Users must wait for the page to load completely. Once the page loads completely, click the **Pipeline** tab to reach the Pipeline configuration as shown below: The Pipeline section of the configuration page appears as follows:

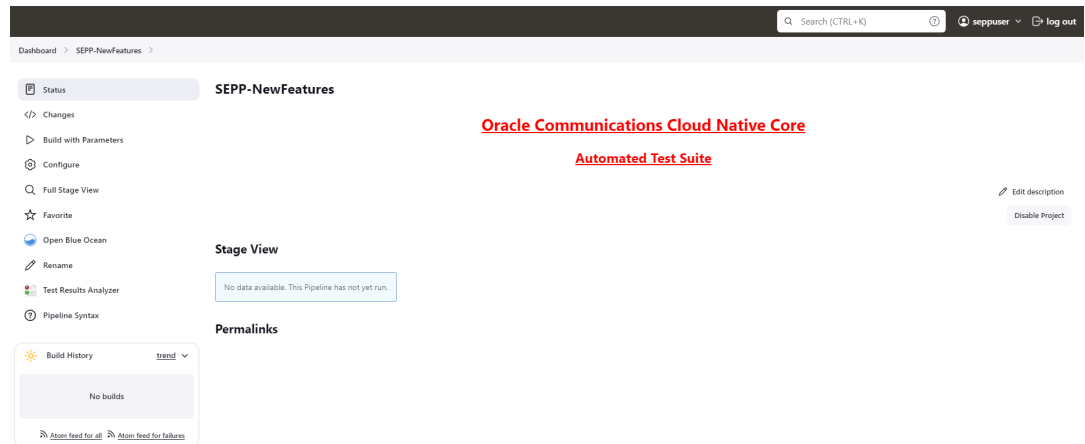**Figure 4-76 Newfeature Pipeline****Figure 4-77 Pipeline script**

```
node ('built-in'){
//a = SELECTED_NF b = SEPPCONFIGSVNAME c = CSEPPIGWNAME d = PSEPPIGWNAME
//e = SEPPSTUBNAME f = NFINSTANCEID g = PROMSVCIIP h = PROMSVCPOR h = PROMSVCPOR i = PROMSVCUR j = RERUN_COUNT
//k = ELK_WAIT_TIME l = ELK_HOSTNAME m = ELK_PORT n = STUB_LOGS o = LOG_TYPE p = GLOBAL_WAIT_TIME
withenv([

]){

sh '''
sh /var/lib/jenkins/ocsepp_tests/preTestConfig.sh \
-a SEPP \
-b ocsepp-release-config-mgr-svc.csepp \
-c ocsepp-release-plmn-ingress-gateway.csepp \
-d ocsepp-release-n32-ingress-gateway.csepp \
-e sepp-ats-rel-stubserver.csepp \
-f 9faf1bbc-6e4a-4454-a507-aef01a101a06 \
-g prometheus.cne-infra \
-h 9090 \
-i /api/ \
-j 1 \
-k 10 \
-l occne-elastic-elasticsearch-master.occne-infra \
-m 9200 \
-n yes \
-o kubernetes \
-p 5
'''

if(env.Include_Regression && "${Include_Regression}" == "YES"){
sh '''sh /var/lib/jenkins/common_scripts/merge_jenkinsfile.sh'''
load "/var/lib/jenkins/ocsepp_tests/jenkinsData/Jenkinsfile-Merged"
}
else{
load "/var/lib/jenkins/ocsepp_tests/jenkinsData/Jenkinsfile-NewFeatures"
}
}
}
```

In the above screen, you can change the values of the 'Pipeline script'.

- The user must not change any other value apart from line number 12 to line 20 and line number 26.
- User can change only those parameters that are marked as "a" to "h" as per your requirement.
- A new parameter "p" has been introduced to customize the global wait time for the scale up and scale down of pods test cases. Pods scaling time is different on different



setups. Sometimes pods take longer than usual for scaling up or scaling down operations. To handle this situation you can increase the global wait time parameter as required. Recommended value is 60.

- Recommended value for rerun count is "3".

a: Name of the NF to be tested in capital (SEPP).  
b: Config manager service name and namespace  
c: Plmn ingress service name and namespace  
d: N32 ingress service name and namespace  
e: Stub server service name and namespace  
f: SEPP Instance ID configured  
g: Prometheus hostname and namespace  
h: Prometheus port  
i: Prometheus API endpoint  
j: Re run count  
k: ELK wait time before logs are fetched  
l: ELK hostname and namespace  
m: ELK port  
n: Stub log collection enable  
o: Type of log collection method ( kubernetes/Elasticsearch)  
p: GLOBAL WAIT TIME

 **Note**

Do not change any value if OCCNE cluster is used and SEPP, ATS and STUB are deployed in ocsepp namespace.

3. Click **Save** after making necessary changes. The **Pipeline SEPP-NewFeatures** screen appears.

### Running SEPP Test Cases

To run SEPP test cases:

1. Click the **Schedule a Build with parameters** icon present on the SEPP-NewFeatures screen in the extreme right column corresponding to SEPP-NewFeatures row. The following screen appears:

Figure 4-78 SEPP-NewFeatures

**Oracle Communications Cloud Native Core**  
**Automated Test Suite - SEPP**

**EXECUTION OPTIONS**

|                                                                    |                             |                                      |                              |
|--------------------------------------------------------------------|-----------------------------|--------------------------------------|------------------------------|
| TestSuite<br>NewFeatures                                           | Execute_Suite<br>SEPP       | Configuration_Type<br>Product_Config | Fetch_Log_Upon_Failure<br>NO |
| Log_Type<br>No TestLog collection during container must be running | Log_Level<br>Not Applicable |                                      |                              |

☒ Not Applicable

**FEATURES AND TESTCASES**

Features  
All

Stage: sequential\_stage

Group: group1

- CN32C\_PORT\_SEGREGATION\_REINIT\_IPX
- PN32F\_SI\_2340\_IPX

- In the above screen, there is an option **Execute\_Suite** to select SEPP or Roaming\_Hub. If you have deployed SUT as SEPP, select **SEPP** option and if you have deployed SUT as Roaming\_Hub, select **Roaming\_Hub** option.
- In the above screen, there is an option **Configuration\_Type** to select product/custom configuration.
- In the above screen, there are three **Select\_Option(s)**, which are:
  - All:** This is the default option. It runs all the SEPP test cases. Scroll-down and click **Build** to run all the test cases.
  - Sanity:** It is recommended to run Sanity before running any test case. It ensures all the deployments are done properly.
  - Single/Multiple Feature:** This option allows you to select any number of test cases you want to run from total number of test cases available for execution. After selecting the test cases, scroll-down and click **Build** to run the selected SEPP test cases.
- Click **Build** to execute the ATS run.

In the above screen, the feature files are now shown in the respective stage and group.

## 4.7.4 NewFeatures - Documentation

To view SEPP functionalities, go to SEPP-NewFeatures pipeline and click the **Documentation** link in the left navigation pane. The following screen appears:

Figure 4-79 Documentation

**Related Pages**

Here is a list of all related documentation pages:

|                                               |  |
|-----------------------------------------------|--|
| <a href="#">CN32C_PORT_SEGREGATION_REINIT</a> |  |
| <a href="#">CN32F_SI_2340</a>                 |  |

Click any functionality to view its test cases and scenarios of each test case. A sample screen is given below:

**Figure 4-80 Test cases and Scenarios**

| CN32f_SI_2340                                                                                                                                                                                                  |                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| #Copyright 2020 (C), Oracle and/or its affiliates. All rights reserved.                                                                                                                                        |                                                                                                            |
| <b>Description :</b>                                                                                                                                                                                           |                                                                                                            |
| To Validate PLMNIngress Gateway successfully performs the egress rate limiting based on the configured Bucket options and N32 EGW routes the non discarded messages on the basis of virtualHost or N32f Param. |                                                                                                            |
| <b>Pre-requisite :</b>                                                                                                                                                                                         |                                                                                                            |
| 1. All components of SEPP are deployed - plmn gateways, n32 gateways, config-mgr, n32c and n32f microservices.                                                                                                 |                                                                                                            |
| 2. Test stubs (bddclient, stubserver) are deployed.                                                                                                                                                            |                                                                                                            |
| <b>cn32f_eri_message_priority_greater_routing_to_high_priority</b>                                                                                                                                             |                                                                                                            |
| <b>Objective :</b>                                                                                                                                                                                             |                                                                                                            |
| Verify incoming request at plmn ingress gateway is dropped when bucket capacity is exhausted and msg priority header value is greater or equal to cutoff priority.                                             |                                                                                                            |
| Procedure                                                                                                                                                                                                      | Expected Result                                                                                            |
| 1. Enable global egress rate limiting with both 3gpp-sbi-target-approval and authority headers.                                                                                                                | 1. Request should be successful                                                                            |
| 2. Create egress rate limiting list with bucket capacity as 1, refill rate as 1, duration as 100, request token as 1.                                                                                          | 2. Request should be successful                                                                            |
| 3. Send message from bdd client with 3gpp-sbi-target-approval header                                                                                                                                           | 3. Request is sent successfully and token in bucket would be exhausted                                     |
| 4. Consumer NF(bddclient) sends request with 3gpp-sbi-target-approval header and message priority greater than or equal to cutoff priority to producer NF                                                      | 4. Verify plmn ingress gateway rejects the message as its priority is greater or equal to cutoff priority. |
| 5. N32 Egress Gateway routes to the highest priority Producer SEPP                                                                                                                                             | 5. Verify n32 egress gateway forwards request to the highest priority producer sepp.                       |

Based on the functionalities covered under the documentation, the build Requires parameter screen displays test cases. To navigate back to the Pipeline SEPP-NewFeatures screen, click the Back to SEPP-NewFeatures link available on top left corner of the screen.

## 4.7.5 SEPP Regression Pipeline

This section describes how to run test cases for SEPP Regression pipeline.

The **SEPP\_Regression** pipeline is a pre-configured pipeline where all the test cases of previous releases are available. For example, for SEPP 23.4.x, this pipeline has all the test cases released till SEPP 23.3.x.

To view **SEPP\_Regression** pipeline details, perform the following steps:

1. Click **SEPP\_Regression** in the **Name** column. The following screen appears:

**Figure 4-81 SEPP Regression**

The screenshot displays the Oracle Cloud Native Core Automated Test Suite interface. At the top, there's a header with the Oracle logo, a search bar, and user information (seppuser, log out). Below the header, the breadcrumb trail shows 'Dashboard > SEPP-Regression'. The main content area is titled 'Pipeline SEPP-Regression'. On the left, there's a sidebar with navigation options: Status (selected), Changes, Build with Parameters, Configure, Full Stage View, Open Blue Ocean, Rename, Test Results Analyzer, and Pipeline Syntax. The main area shows the 'Stage View' for the 'SEPP-Regression' pipeline, which currently displays 'No data available. This Pipeline has not yet run.' Below this, there's a 'Build History' section with a search bar and a table showing 'No builds'. At the bottom, there's a 'Permalinks' section with two links: 'All builds' and 'All builds for failures'.

2. Click **Build with Parameters** in the left navigation pane.
3. Click **Documentation** to view the documented test cases which are part of this SEPP release.
4. Click blue dots in the **Build History** box to view the success console logs of the "All" and "Sanity" respectively.
5. The **Stage View** shows pipeline that is already run for the customer reference.
6. Click **Configure** to configure SEPP Regression. Users must wait for the page to load completely. Once the page loads completely.
7. click the **Pipeline** tab to see the Pipeline configuration.

Copy the required test cases that are available in the SEPP folder and place them appropriately within the **custom** folder for SEPP\_Regression. Reload the page to view the test cases available in the **custom** Regression folder.

The configuration method and parameters are same as the **NewFeatures** pipeline.

## 4.7.6 SEPP Regression Documentation

This section describes the documentation for **SEPP-Regression** pipeline.

To view the documentation for any of the SEPP features, on the ATS home page, click SEPP-Regression. Then, click **Documentation** in the left navigation pane.

This page shows features of only those test cases that are released in previous releases.

The following screen shows all the documentation features:

**Figure 4-82 SEPP-Regression documentation**



| My Project                                         |               |
|----------------------------------------------------|---------------|
| Main Page                                          | Related Pages |
| Related Pages                                      |               |
| Here is a list of all related documentation pages: |               |
| CN32C_FAILURE_REMOTE_SEPP_DISABLED                 |               |
| CN32C_FAILURE_SECURITY_CAPABILITY_MISMATCH         |               |
| CN32C_HANDSHAKE_TCP_CONNECTION_FAILURE             |               |
| CN32C_SUCCESS_SECURITY_CAPABILITY_TLS              |               |
| CN32C_SUCCESS_SECURITY_CAPABILITY_TLS_API_PREFIX   |               |
| CN32F_FAILURE_HTTPS_3GPP_SBI_MISSING               |               |
| CN32F_FAILURE_HTTPS_3GPP_SBI_WITH_INCORRECT_PLMN   |               |
| CN32F_FAILURE_HTTPS_3GPP_SBI_WITH_NO_PLMN          |               |
| CN32F_FAILURE_REMOTE_SEPP_NOT_FOUND                |               |
| CN32F_FAILURE_RSS_NOT_FOUND                        |               |

Click any functionality to view its test cases and scenarios of each test case.

The following screen appears if the **CN32C\_SUCCESS\_SECURITY\_CAPABILITY\_TLS** is selected.

Figure 4-83 CN32C\_SUCCESS\_SECURITY\_CAPABILITY\_TLS

| CN32C_SUCCESS_SECURITY_CAPABILITY_TLS                                                                                                                                                                                                  |                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>Description :</b><br>To validate Successful N32c Security capability exchange procedure from consumer SEPP.                                                                                                                         |                                                                                                                                  |
| <b>Pre-requisite :</b><br>1. All components of SEPP are deployed - plmn gateways, n32 gateways, config-mgr, n32c and n32f microservices.<br>2. Test stubs (bddclient, stubserver as P-SEPP, Ingress and egress gateways) are deployed. |                                                                                                                                  |
| <b>cn32c_security_capability_tls_001</b>                                                                                                                                                                                               |                                                                                                                                  |
| <b>Objective :</b><br>Verify Consumer SEPP Initiate Security Capability Exchange when a roaming partner profile is configured and enabled with security capability as TLS.                                                             |                                                                                                                                  |
| Procedure                                                                                                                                                                                                                              | Expected Result                                                                                                                  |
| 1. Configure Roaming Partner Profile with Security Capability as TLS and Status as Enabled along with Remote SEPP FQDN and Port.                                                                                                       | 1. Verify Profile is added successfully and Consumer SEPP Initiate Security capability procedure towards configured remote SEPP? |
| 2. Producer SEPP (Stub Server) receives capability exchange messages and respond with Security capability as TLS.                                                                                                                      | 2. Verify Security Capability recieved is TLS on Producer SEPP and Handshake is successful?                                      |

Generated by doxygen 1.8.16

## 4.7.7 Running SEPP Health Check Pipeline

To run health check on SEPP:

1. Navigate to **SEPP-HealthCheck** pipeline and click **Configure**.
2. The **General** tab appears. The user must wait for the page to load completely.
3. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:

### ! Important

Ensure that the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Figure 4-84 SEPP-HealthCheck

Pipeline script

Script ?

```

5  catchError(buildResult: 'SUCCESS', stageResult: 'UNSTABLE') {
6
7      //a = helm releases [Provide Release Name with Comma Seperated if more than 1 ]
8      //b= Namespace, If not applicable then remove the argument
9      //c= helm command name [helm or helm2 or helm3]
10
11      try
12      {
13
14          sh '''
15              set +x
16              sh /var/lib/jenkins/ocsepp_tests/helmtest-PreConfig.sh \
17              -a ocsepp-release \
18              -b seppsvc\
19              -c helm\

```

Do not change any value other than line numbers 17, 18, and 19. You can change the parameters marked as "a","b",and "c" as per user requirement. The parameters details are provided as comments in line number 7, 8, and 9. The parameters description is as follows:

- a - helm releases [Provide Release Name with Comma Separated if more than 1 ]
  - b - namespace of SUT.
  - c - helm version supported
4. Click **Save**. The **Pipeline SEPP-HealthCheck** page appears.
  5. Click **Build Now**. This triggers health check for SUT.

Example output:

```

Started by user seppuser
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/.jenkins/workspace/SEPP-HealthCheck
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Helm-Test-Init)
[Pipeline] catchError
[Pipeline] {
[Pipeline] sh
+ set +x
export HelmTestRelease=ocsepp-release-naman
export HelmTestNamespace=sepp2
export HelmCmd=helm
[Pipeline] sh
+ export NF=SEPP
+ NF=SEPP
+ /env/bin/python3 /env/lib/python3.9/site-packages/ocnftest_lib/
helmtest_with_secret.py
[Pipeline] }
[Pipeline] // catchError
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Validate-Helm-Test)
[Pipeline] catchError
[Pipeline] {
[Pipeline] echo
2022-08-29 05:14:23,045[32m      INFO LOG.HELM-TEST:108 [0m] [32mhelm test
ocsepp-release-naman -n sepp2[0m
2022-08-29 05:14:53,006[32m      INFO LOG.HELM-TEST:120 [0m] [32m
NAME: ocsepp-release-naman
LAST DEPLOYED: Wed Aug 24 10:08:10 2022
NAMESPACE: sepp2
STATUS: deployed
REVISION: 1
TEST SUITE:      ocsepp-release-naman-test
Last Started:    Mon Aug 29 05:14:36 2022
Last Completed:  Mon Aug 29 05:15:00 2022
Phase:          Succeeded[0m
[Pipeline] }
[Pipeline] // catchError
[Pipeline] }
[Pipeline] // stage
[Pipeline] }

```

```
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

## 4.8 Running UDR Test Cases using ATS

This section describes how to run UDR test cases using ATS. It includes:

- [Prerequisites](#)
- [Logging into ATS](#)
- [Running SLF Pipelines](#)
- [Running UDR Pipelines](#)
- [Running EIR Pipelines](#)

### 4.8.1 Prerequisites

This section describes prerequisites for Subscriber Location Function (SLF) pipelines, Unified Data Repository (UDR) pipelines, and Equipment Identity Register (EIR) pipelines.

- [Prerequisites for SLF Pipelines](#)
  - [UDR Custom Values File Configuration for SLF Pipelines](#)
  - [Provisioning Gateway Custom Values File Configuration for SLF Pipelines](#)
- [Prerequisites for UDR Pipelines](#)
  - [UDR Custom Values File Configuration for UDR Pipelines](#)
- [Prerequisites for EIR Pipelines](#)
  - [UDR Custom Values File Configuration for EIR Pipelines](#)

#### 4.8.1.1 Prerequisites for SLF Pipelines

The prerequisites to run SLF pipelines are:

- Select any one of the following System Under Test (SUT) deployment models, depending on your requirements.
  - **Model 1:** To run all the scenarios (SUTSuite: 'All') in the SLF-Regression and SLF-NewFeatures pipeline, deploy UDR with the following configurations:
    - \* Four UDRs like UDR1, UDR2, UDR3, and UDR4 where UDR1 and UDR2 are in segment1 and UDR3 and UDR4 in segment2.
    - \* Deploy one Provisioning Gateway along with Provisioning Gateway Auditor service.
    - \* Deploy two NRF-Stubs
    - \* Deploy one ATS in same namespace as UDRs, ProvGW, NRF-Stubs

To deploy four UDRs in same namespace as ProvGw, ATS, and NRF stubs, create four secrets, such as each UDR has unique configuration database (configdb), but UDRs in same segment shares the subscriber database.

Configure the Provisioning Gateway segment so that the UDR1 and UDR3 are preferred SLFs in their segment 1 and segment 2 respectively. You must also deploy bulk import tool, export tool, and OSO.

- **Model 2:** To run the SLF-Performance pipeline, deploy UDR with the resources defined in the [Resource Requirements](#) section.

The UDR must be deployed with the following replica counts:

**Table 4-9 Replica Count**

| Service name        | Setup type | CPU/Pod | Memory/Pod | Number of pods |
|---------------------|------------|---------|------------|----------------|
| ingressgateway-sig  | UDR        | 6       | 4          | 2              |
| ingressgateway-prov | UDR        | 6       | 4          | 2              |
| nudr-drservice      | UDR        | 5       | 4          | 2              |
| nudr-provservice    | UDR        | 5       | 4          | 2              |

The ATS pod must be installed with the following configuration for 1K TPS:

**Table 4-10 ATS Pod Installation for 1K TPS**

| Service name | Setup type | CPU/Pod | Memory/Pod | Number of pods |
|--------------|------------|---------|------------|----------------|
| ocats-udr    | ATS        | 4       | 6          | 1              |

The ATS pod must be installed with the following configuration for 2K TPS:

**Table 4-11 ATS Pod Installation for 2K TPS**

| Service name | Setup type | CPU/Pod | Memory/Pod | Number of pods |
|--------------|------------|---------|------------|----------------|
| ocats-udr    | ATS        | 8       | 16         | 1              |

**Note**

OSO must also be deployed on the same namespace.

**Note**

The above configuration is tested for both, constant 1K TPS and varying TPS between 1K and 2K, for a duration of 15 minutes.

- **Model 3:** To run the **Multi\_Site** option of the **SUTSuite** field in the SLF Regression pipeline, deploy two UDRs in two different namespaces having two different cnDBTier with database site replication feature enabled between the two. Provisioning Gateway also needs to be deployed on each namespace. Bulk Import tool and export tool needs to be deployed on first namespace. You must also deploy OSO on each namespace.

#### 4.8.1.1.1 UDR Custom Values File Configuration for SLF Pipelines

This section highlights only the necessary changes to be done in the UDR custom-values.yaml file to run ATS.



**Note**

- Deploy UDR in the SLF mode. For more information about UDR installation, see *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*.
- To configure ASM with UDR (including setting istio-proxy, CPU, and memory), see the **ASM Specific Configuration** and **UDR Configuration Parameters** sections in the *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*. The UDR custom-values.yaml file is available with documentation package on MOS.

- Configure the global section of the OCUDR custom values file as follows:

```
global:
  dockerRegistry: <docker-registry>:<docker port>/ocudr
  mysql:
    dbServiceName: <db service to which UDR should be connected>
    port: &dbPortNumber "3306"
    configdbname: &configdbname <config db name>
    dbname: &dbname <subscriber db name>
  ...
  createNetworkPolicy: true #only if network policy is supported in the
environment. SLF pipeline to validate network policy supports only default
policy
  dbCredSecretName: <udr secret name>
  ...
  alternateRouteServiceEnable: true
  alternateRouteServiceHost: <udr-helm-release-name>-alternate-route
  ...
  performanceServiceEnable: true
  ...
  udrServices: "nudr-group-id-map"
  ...
  diamGatewayEnable: false
  ...
  appInfoBaseUrl: "<udr-helm-release-name>-nudr-app-info:5906"
  ...
  nrfClientNfManagementEnable: true # value is true for UDR1 deployment;
UDR2, UDR3 and UDR4 should be deployed with false
  deploymentNrfClientService:
    envNfNamespace: <namespace where UDR is to be deployed>
  ...
  enableControlledShutdown: &enableControlledShutDown true
  ...
  serviceMeshCheck: &serviceMeshFlag true #if UDR is intended to be
deployed with ASM.
```

**Note**

- If UDR is installed with ASM, then use the annotations defined in the *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*.
- Database names provided in the SLF custom.values files must match with the names created in the corresponding database secrets.
- The nfnInstanceId for each of SLF must be unique for all model.

- Update the **config-server** section as follows:

```
config-server:
  fullnameOverride: <udr-helm-release-name>-config-server
```

- Update the **ingressgateway-sig** section as follows:

```
ingressgateway-sig:
  global:
    istioIngressTlsSupport:
      ingressGateway: true #only if UDR is being deployed with ASM.
    ...
    lciHeaderConfig:
      enabled: true
      loadThreshold: 30
      localLciHeaderValidity: 10000
    ...
    svcToSvcInstanceIdMapping:
      - svcName: "<udr-helm-release-name>-nudr-drservice"
        serviceInstanceId: <serviceInstanceId-defined-in-appProfiles-for-nudr-group-id-map>
    ...
    xfccHeaderValidation:
      validation:
        enabled: &xfccValidationEnabled true #should be disabled for Model 2 and Model 3.
    ...
    serverHeaderDetails:
      enabled: true
    ...
    oauthValidatorEnabled: true #should be disabled for model 2 and model 3.
    nrfsPublicKeyKubeSecret: <oauth secret name for sig>
    nrfsPublicKeyKubeNamespace: <UDR namespace>
    validationType: relaxed
    ...
    enableControlledShutdown: true
    controlledShutdownConfigMode: REST
    ...
    userAgentHeaderValidationConfigMode: REST
```

- Update the **ingressgateway-prov** section as follows:

```
ingressgateway-prov:
  global:
```

```

istioIngressTlsSupport:
  ingressGateway: true #only if UDR is being deployed with ASM.
xfccHeaderValidation:
  validation:
    enabled: &xfccValidationEnabled false
...
serverHeaderDetails:
  enabled: false
...
oauthValidatorEnabled: true #should be disabled for model 2 and model 3.
nrfPublicKeyKubeSecret: <oauth secret name for prov>
nrfPublicKeyKubeNamespace: <UDR namespace>
validationType: relaxed
...
enableControlledShutdown: true
controlledShutdownConfigMode: REST

```

- Configure targets and ports in the **alternate-route.staticVirtualFqdns** section with the NRF stubs FQDNs and ports.

#### Note

This is applicable only for Model 1.

```

alternate-route:
  staticVirtualFqdns:
    - name: http://abc.test.com
      alternateFqdns:
        - target: <stub1 fqdn>
          port: <stub1 port>
          priority: 10
        - target: <stub2 fqdn>
          port: <stub2 port>
          priority: 20

```

- Update the **appinfo** section as follows:

```

appinfo:
  ...
  dbStatusUri: http://<DB monitoring SVC>:<DB monitoring svc port>/db-tier/
status/local
  realtimeDbStatusUri: http://<DB monitoring SVC>:<DB monitoring svc
port>/db-tier/status/cluster/local/realtime
  replicationUri: http://<DB monitoring SVC>:<DB monitoring svc port>/db-
tier/status/replication
  ...
  prometheusUrl: "http://<Prometheus fqdn or IP>:<prometheus port>/<domain-
name>/prometheus"
  alertmanagerUrl: "http://<alertmanager fqdn or IP>:<prometheus port>/
<domain-name>/alertmanager"
  tagNamespace: kubernetes_namespace # change this field only if it is
being deployed with OS0. Please refer to UDR User Guide for more
information.
  ...

```

```
core_services:
  udr: *slf
...
fullnameOverride: <udr-helm-release-name>-app-info
```

Run the below curl command from ATS pod to find domain name of OSO:

```
curl -i http://<OSO FQDN or IP>:<OSO PORT>/
```

Example:

```
(env) [jenkins@ocats-udr-5c55f59d66-jkzml ~]$ curl -i http://oso-svr:80/
HTTP/1.1 302 Found
Content-Type: text/html; charset=utf-8
Location: /cne-23-1/prometheus
Date: Thu, 20 Apr 2023 06:28:48 GMT
Content-Length: 48
```

```
<a href="/cne-23-1/prometheus">Found</a>.
```

Prometheus URL is `http://oso-svr:80/cne-23-1/prometheus`.

- Update the **nrf-client** section as follows:

**Note**

This is applicable only for Model 1.

```
nrf-client:
  profile: |
    #uncomment appProfiles that is dedicated to used for SLF mode (nudr-
    group-id-map) and comment the rest of the appProfiles.
    enableVirtualNrfResolution=true
    #virtualNrfFqdn value must be same as that of alternate-
    route.staticVirtualFqdns.name[0] without the url scheme as shown below
    virtualNrfFqdn=abc.test.com
  nrf-client-nfmanagement:
    ...
    replicas: 1
    ...
    enablePDBSupport: false
```

- Update the **perf-info** section as follows:

```
perf-info:
  envMySQLDatabase: <configdb name used for UDR>
  ...
  configmapPerformance:
    prometheus: "http://<Prometheus fqdn or IP>:<prometheus port>/<domain-
    name>/prometheus"
  log:
```

```
level:
  perfinfo: "WARN"
```

#### Note

The values for namespace, container name, and servicename depend on CNE or OSO versions. For information, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*.

- Update the **egressgateway** section as follows:

```
egressgateway:
  userAgentHeaderConfigMode: REST
```

- Configure the following parameters in the bulk-import tool yaml file:

#### Note

To test the bulk import tool, it is important to install the bulk import tool as a separate helm deployment in the same namespace as that of UDR. For information about the bulk import tool installation and sample bulk import yaml file, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*. This is applicable for Model 1 only.

- Ensure the secret is used to install subscriber bulk import tool is same as UDR1. The Bulk Import tool should communicate with UDR1.

#### **bulk import deployment**

```
global:
  mysql:
    dbServiceName: "<DB Endpoint provided for UDR deployment>"
    port: "<PORT Used provided UDR deployment>"
    ...
    dbCredSecretName: '<UDR1 Secret>'
    ...
  xmlToCsv:
    enabled: false
    ...
  customExtension:
    allResources:
      labels: {}
      annotations:
        oracle.com/cnc: "true"
    ...
  serviceMeshCheck: true #if exprt tool is intended to be deployed with
  ASM ...
  ...
  ocudrReleaseName: '<UDR1 Helm name>'
```

**Note**

- \* To run the bulk import scenarios, disable **xmlToCsv**.
- \* Subscriber bulk import tool must always be clean installed.

**Subscriber Export tool Configuration**

Configure the following parameters in the nudr-export-tool yaml file:

**Note**

To test the subscriber export tool, it is important to install the subscriber export tool as a separate helm deployment in the same namespace as that of UDR. For information about the subscriber export tool, see Subscriber Export Tool section in *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*.

- Ensure the secret is used to install the subscriber export tool is same as UDR1. The subscriber export tool should communicate with UDR1. Update the **nudr-export-tool deployment** section as follows

```
global:
  dockerRegistry: <docker-registry>:<docker port>/ocudr
  mysql:
    dbServiceName: "<DB Endpoint provided for UDR deployment>"
    port: "<PORT Used provided UDR deployment>"
    ...
    dbCredSecretName: '<UDR1 Secret>'
    ...
  sftpDetails:
    ...
    sftpExportEnabled: false
    ...
    ...
  serviceMeshCheck: true #if export tool is intended to be deployed with ASM
  ...
  ocudrReleaseName: '<UDR1 Helm name>'
  ...
  batch:
    corePoolSize: 1
    maxPoolSize: 1
  exportMode: SLF_EXPORT
```

**Note**

Subscriber export tool must always be clean installed.

**Other configuration details**

- Configure Prometheus with UDR and Provisioning Gateway default alerts. For more information about UDR alerts, see *Oracle Communications Cloud Native Core, Unified*

*Data Repository User Guide* and for Provisioning Gateway alerts, see *Oracle Communications Cloud Native Core, Provisioning Gateway Installation Guide*.

- Certificates used for Provisioning Gateway TLS should be provided in `/var/lib/jenkins/ocslf_tests/certs` in pod.
- Create Envoy Filter for both, UDR1 setup and ATS as described in [Enabling Service Mesh](#) for XFCC header validation scenarios and server header scenarios if installed with ASM.
- Create Peer Authentication as described in [Enabling Service Mesh](#) and *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*, if installed with ASM.

#### 4.8.1.1.2 Provisioning Gateway Custom Values File Configuration for SLF Pipelines

##### **Note**

For more information about Provisioning Gateway installation, see *Oracle Communications Cloud Native Core Provisioning Gateway Installation Guide*. The ProvGW custom-values.yaml file is available with documentation package on MOS.

- Update the global section of the ProvGW custom-values.yaml file as follows:

```
global:
  dockerRegistry: <docker-registry>:<docker port>/provgw
  mysql:
    dbServiceName: <db service to which UDR should be connected>
    port: &dbPortNumber "3306"
    configdbname: &configdbname <ProvGw DB name>
    dbname: &dbname <ProvGw DB name>
  ...
  createNetworkPolicy: true #only if network policy is supported in the
  environment. SLF pipeline to validate network policy supports only default
  policy
  ...
  serviceMeshCheck: &serviceMeshFlag true #if UDR is intended to be
  deployed with ASM.
  ...
  usageMode: "SLF"
  udr:
    httpsEnabled: false
    segDetails:
      - name: SEG-1
        fqdnValues: <UDR1 fqdn>,<UDR2 fqdn>
        preferred: <UDR1 fqdn>
      - name: SEG-2
        fqdnValues: <UDR3 fqdn>,<UDR4 fqdn>
        preferred: <UDR3 fqdn>
```

##### **Note**

Database names provided in the Provisioning Gateway custom values files must match with the names created in the corresponding database secret.

- Database monitoring fqdn and port must provided under provgw-service:  
**provgw-service**

```
provgw-service:
...
  probes:
    dbStatusCheckUrl: "http://<DB Monitoring svc>:<DB monitoring port>/db-
tier/status/local"
```

- Enable the **auditor-service** parameter as follows:

```
auditor-service:
  enabled: true
...
  sftpDetails:
    secrets:
      privatekey:
        name: <private key secret created for SFTP from export tool>
      publickey:
        name: <public key secret created for SFTP from export tool>
...
  usePersistentVolume: true
...
  probes:
    dbStatusCheckUrl: "http://<DB Monitoring svc>:<DB monitoring port>/db-
tier/status/local"
```

- Configure **provgw-config** as below:

```
provgw-config:
...
  probes:
    dbStatusCheckUrl: "http://<DB Monitoring svc>:<DB monitoring port>/db-
tier/status/local"
```

- Under the **prov-ingressgateway annotations** section, set the **traffic.sidecar.istio.io/excludeInboundPorts** as '8443'. Ensure the ssl section has secret names and namespace that are created as part of Transport Layer Security (TLS) support. Set the **initssl** and **enableIncomingHttps** parameters as 'true'.

```
prov-ingressgateway:
  deployment:
    customExtension:
      labels: {}
      annotations:
        traffic.sidecar.istio.io/excludeInboundPorts: "8443"
    ssl:
      tlsVersion: TLSv1.2,TLSv1.3
      privateKey:
        k8SecretName: <TLS support secret name>
        k8Namespace: <ProvGw Namespace>
      rsa:
        fileName: <RSA private key pem file>
      ecdsa:
```



```

        fileName: <ECDSA private key pem file>

certificate:
  k8SecretName: <TLS support secret name>
  k8Namespace: <ProvGw Namespace>
  rsa:
    fileName: <RSA certificate>
  ecdsa:
    fileName: <ECDSA certificate>

caBundle:
  k8SecretName: <TLS support secret name>
  k8Namespace: <ProvGw namespace>
  fileName: <caBundle file name>

keyStorePassword:
  k8SecretName: <TLS support secret name>
  k8Namespace: <ProvGw namespace>
  fileName: <key txt file>

trustStorePassword:
  k8SecretName: <TLS support secret name>
  k8Namespace: <ProvGw namespace>
  fileName: <trust txt file>
...
  initssl: true
...
  enableIncomingHttps: true

```

#### ① Note

For information about Provisioning Gateway installation and ASM configuration for Provisioning Gateway, see *Oracle Communications Cloud Native Core Provisioning Gateway Installation Guide*. This section highlights the necessary changes that you are required to do in the Provisioning Gateway custom-values.yaml file to run ATS.

### 4.8.1.2 Prerequisites for UDR Pipelines

The prerequisites to run UDR pipelines are:

- Select any one of the following SUT deployment models depending on your requirements.
  - **Model 1: Single Site Deployment**  
To run UDR-NewFeatures, select **SUTSuite:** as 'All' and for UDR-Regression, select **SUTSuite:** 'ALL', Features: All (Except UDR\_Multisite). For this, you must deploy one UDR, one Provisioning Gateway in UDR mode, two diameter stubs, one Fourg stub, one NOTIFY Stub, two NRF-stubs, one SCP stub, and one ATS in same namespace.
  - **Model 2: Multiple Site Deployment:** To run UDR-Regression pipeline where **SUTSuite:** is 'MULTISITE', you must deploy:
    - \* Two UDRs in two different namespaces that has two different cnDBTier with database site replication enabled between the two.
    - \* ATS in any one namespace.

- \* Namespace-1 with one UDR, two diameter stubs, one Fourg stub, one NOTIFY stub, two NRF-Stubs, one SCP stub, and one ATS.
- \* Namespace-2 with one UDR.

#### 4.8.1.2.1 UDR Custom Values File Configuration for UDR Pipelines

This section highlights only the necessary changes that you are required to do in the UDR custom-values.yaml file to run ATS.

##### Note

For information about UDR installation and ASM configuration for UDR, see the *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide* available on [My Oracle Support](#).

- Update the global section as follows:

```
global:
  dockerRegistry: <docker-registry>:<docker port>/ocudr
  mysql:
    dbServiceName: <db service to which UDR should be connected>
    port: &dbPortNumber "3306"
    configdbname: &configdbname <config db name>
    dbname: &dbname <subscriber db name>
  ...
  createNetworkPolicy: true #only if network policy is supported in the
environment. SLF pipeline to validate network policy supports only default
policy
  ...
  dbCredSecretName: <udr secret name>
  ...
  alternateRouteServiceEnable: true
  alternateRouteServiceHost: <udr-helm-release-name>-alternate-route
  performanceServiceEnable: true
  ...
  autoCreateSubscriber: false
  FourGPolicyConfiguration:
    ondemandMigration:
      enabled: &onDemandMigrationEnabled true
  ...
  appInfoBaseUrl: "<udr-helm-release-name>-nudr-app-info:5906"
  ...
  deploymentNrfClientService:
    envNfNamespace: <UDR namespace>
  ...
  egressHttpsEnabled: &egressHttpsFlag true
```

##### Note

Database names provided in the UDR custom values files must match with the names created in the corresponding database secret.

- Update the ingressgateway-sig section as follows:

```

ingressgateway-sig:
  global:
  ...
    lciHeaderConfig:
      enabled: true
      loadThreshold: 30
      localLciHeaderValidity: 10000
  ...
    svcToSvcInstanceIdMapping:
      - svcName: "<udr-helm-release-name>-nudr-drservice"
  ...
    xfccHeaderValidation:
      validation:
        enabled: &xfccValidationEnabled false
  ...
  service:
    ...
    ssl:
      tlsVersion: TLSv1.2,TLSv1.3
      privateKey:
        k8SecretName: <TLS support secret name>
        k8Namespace: <UDR Namespace>
      rsa:
        fileName: <RSA private key pem file>
      ecdsa:
        fileName: <ECDSA private key pem file>

    certificate:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR Namespace>
      rsa:
        fileName: <RSA certificate>
      ecdsa:
        fileName: <ECDSA certificate>

    caBundle:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR namespace>
      fileName: <caBundle file name>

    keyStorePassword:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR namespace>
      fileName: <key txt file>

    trustStorePassword:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR namespace>
      fileName: <trust txt file>
  ...
  serverHeaderDetails:
    enabled: true
  ...
  initssl: true

```

- ```

...
  oauthValidatorEnabled: &oauthEnabled true
  ...
  nrftPublicKeyKubeSecret: <oauth secret name>
  nrftPublicKeyKubeNamespace: <UDR namespace>
  validationType: relaxed
  ...
...
  enableIncomingHttps: true
...
  userAgentHeaderValidationConfigMode: REST

```
- Update the ingressgateway-prov section as follows:
 

```

ingressgateway-prov:
  global:
    xfccHeaderValidation:
      validation:
        enabled: &xfccValidationEnabled false
  ...
  service:
    ...
    ssl:
      tlsVersion: TLSv1.2,TLSv1.3
      privateKey:
        k8SecretName: <TLS support secret name>
        k8NameSpace: <UDR Namespace>
      rsa:
        fileName: <RSA private key pem file>
      ecdsa:
        fileName: <ECDSA private key pem file>

      certificate:
        k8SecretName: <TLS support secret name>
        k8NameSpace: <UDR Namespace>
      rsa:
        fileName: <RSA certificate>
      ecdsa:
        fileName: <ECDSA certificate>

      caBundle:
        k8SecretName: <TLS support secret name>
        k8NameSpace: <UDR namespace>
        fileName: <caBundle file name>

      keyStorePassword:
        k8SecretName: <TLS support secret name>
        k8NameSpace: <UDR namespace>
        fileName: <key txt file>

      trustStorePassword:
        k8SecretName: <TLS support secret name>
        k8NameSpace: <UDR namespace>
        fileName: <trust txt file>
    ...
  serverHeaderDetails:

```

```

        enabled: false
    ...
    initssl: true
    ...
    oauthValidatorEnabled: &oauthEnabled true
    ...
    nrfPublicKeyKubeSecret: <oauth secret name>
    nrfPublicKeyKubeNamespace: <UDR namespace>
    validationType: relaxed
    ...
    ...
    enableIncomingHttps: true

```

- Update the alternate-route section as follows:

```

alternate-route:
  staticVirtualFqdns:
    - name: http://abc.test.com
      alternateFqdns:
        - target: <nrf stub1 fqdn>
          port: <nrf stub1 port>
          priority: 10
        - target: <nrf stub2 fqdn>
          port: <nrf stub2 port>
          priority: 20

```

- Update the nrf-client section as follows:

```

nrf-client:
  configmapApplicationConfig:
    ...
    profile:
      ...
      enableVirtualNrfResolution=true
      #virtualNrfFqdn value must be same as that of alternate-
route.staticVirtualFqdns.name[0] without the url scheme as shown below
      virtualNrfFqdn=abc.test.com
    ...

nrfRetryConfig=[{"serviceRequestType":"ALL_REQUESTS","primaryNRFRetryCount":1,"nonPrimaryNRFRetryCount":1,"alternateNRFRetryCount":1,"errorReasonsForFailure":["503","504","500","SocketTimeoutException","JsonProcessingException","UnknownHostException","NoRouteToHostException","IOException"],"gatewayErrorCodes":["503"],"requestTimeout":10},
{"serviceRequestType":"AUTONOMOUS_NFREGISTER","primaryNRFRetryCount":1,"nonPrimaryNRFRetryCount":1,"alternateNRFRetryCount":-1,"errorReasonsForFailure":["503","504","500","SocketTimeoutException","JsonProcessingException","UnknownHostException","NoRouteToHostException","IOException"],"gatewayErrorCodes":["503"],"requestTimeout":10}]
    ...
    nrf-client-nfmanagement:
      enablePDBSupport: false

```

- Update the egressgateway section to run SCP routing and TLS notification scenarios as follows:

```
egressgateway:
...
  global:
    lciHeaderConfig:
      enabled: true
      localLciHeaderValidity: 1000
...
  svcToSvcInstanceIdMapping:
    - svcName: "<udr-helm-release-name>-nudr-drservice"
...
  sbiRouting:
    peerConfiguration:
      - id: peer1
        host: '<scp stub svc and this should match with scp stub
expectedAuthorityHeader in scp stub custom values>'
        port: '<scp stub port>'
        apiPrefix: "/"
    peerSetConfiguration:
      - id: set0
        httpConfiguration:
          - priority: 1
            peerIdentifier: peer1
...
  routesConfig:
    ...
    - id: scp_route
      ...
      path: /scp/**
      order: 2
      metadata:
        ...
        sbiRoutingEnabled: true
...
  initssl: true
  enableOutgoingHttps: *egressHttpsFlag
...
  service:
    ...
    ssl:
      tlsVersion: TLSv1.2,TLSv1.3
      privateKey:
        k8SecretName: <TLS support secret name>
        k8NameSpace: <UDR Namespace>
      rsa:
        fileName: <RSA private key pem file>
      ecdsa:
        fileName: <ECDSA private key pem file>

    certificate:
      k8SecretName: <TLS support secret name>
      k8NameSpace: <UDR Namespace>
      rsa:
        fileName: <RSA certificate>
```

```

ecdsa:
  fileName: <ECDSA certificate>

caBundle:
  k8SecretName: <TLS support secret name>
  k8Namespace: <UDR namespace>
  fileName: <caBundle file name>

keyStorePassword:
  k8SecretName: <TLS support secret name>
  k8Namespace: <UDR namespace>
  fileName: <key txt file>

trustStorePassword:
  k8SecretName: <TLS support secret name>
  k8Namespace: <UDR namespace>
  fileName: <trust txt file>
...
userAgentHeaderConfigMode: REST

```

- Update the perf-info section as follows:

```

perf-info:
  envMySQLDatabase: <configdb name used for UDR>
...
  configmapPerformance:
    prometheus: "http://<Prometheus fqdn or IP>:<prometheus port>/<domain-
name>/prometheus"
    log:
      level:
        perfinfo: "WARN"

```

Formation of Prometheus URL is as below:

```

(env) [jenkins@ocats-udr-5c55f59d66-jkzml ~]$ curl -i http://oso-svr:80/
HTTP/1.1 302 Found
Content-Type: text/html; charset=utf-8
Location: /cne-23-1/prometheus
Date: Thu, 20 Apr 2023 06:28:48 GMT
Content-Length: 48

```

```
<a href="/cne-23-1/prometheus">Found</a>.
```

Prometheus url would be: `http://oso-svr:80/cne-23-1/prometheus`

#### Note

The values for namespace, container name and service name depend on CNE versions. For more information, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*.

- Update the app-info section as follows:

```

appinfo:
  ...
  dbStatusUri: http://<DB monitoring SVC>:<DB monitoring svc port>/db-tier/
status/local
  realtimeDbStatusUri: http://<DB monitoring SVC>:<DB monitoring svc
port>/db-tier/status/cluster/local/realtime
  replicationUri: http://<DB monitoring SVC>:<DB monitoring svc port>/db-
tier/status/replication
  ...
  prometheusUrl: "http://<Prometheus fqdn or IP>:<prometheus port>/<domain-
name>/prometheus"
  alertmanagerUrl: "http://<alertmanager fqdn or IP>:<prometheus port>/
<domain-name>/alertmanager"
  ...
  fullnameOverride: <udr-helm-release-name>-app-info

```

- Configure the following parameters in the bulk-import tool yaml file:

#### Note

To test the bulk import tool, it is important to install the bulk import tool as part of UDR. For information about Bulk Import tool installation and sample bulk import yaml file, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*.

- Ensure the secret used to install bulk import tool is same as UDR. Configure the Bulk Import deployment values.yaml file as follows:

```

global:
  mysql:
    dbServiceName: "<DB Endpoint provided for UDR deployment>"
    port: "<PORT Used provided UDR deployment>"
    ...
    dbCredSecretName: '<UDR Secret>'
    ...
  batchConfig:
    asynchronous: false
    ...
  xmlToCsv:
    enabled: true
    ...
  ocudrReleaseName: '<UDR Helm name>'

```

- Do not change the containers name. It should be 'nudr-bulk-import' and 'nudr-xmltocsv'.

#### Note

Subscriber bulk import tool must always be clean installed.



- Configure the following parameters in the `ocudr_nudr_migration_tool_custom_values.yaml` file:

**Note**

Migration tool must be installed as a separate helm deployment. For information about Migration tool installation, see "Migration Tool" section in *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*.

- Ensure the secret used to install the migration tool is same as UDR. Configure the `ocudr_nudr_migration_tool_custom_values.yaml` file as follows:

```
global:
  mysql:
    dbServiceName: "<DB Endpoint provided for UDR deployment>"
    port: "<PORT Used provided UDR deployment>"
    ...
    dbCredSecretName: '<UDR Secret>'
    ...
  preInstall:
    ...
    config:
      additionalErrorLogging: ENABLED
      logSubscriberInfo: ENABLED
    ...
  fourG:
    realm: "oracle.com"
    identity: "tekelec.oracle.com"
    nodePort: 3000
    nodeHost: "fourgstub-stub-service"
    maxConnectionRetry: 100
    ...
  hikari:
    queryTimeout: "-1"
    ...
  ocudrReleaseName: '<UDR Helm name>'
  ...
  sourceEndPointURL: 'http://10.75.229.43:3868'
  udrServiceBaseURL: '<UDR Helm name>-ingressgateway-prov:80'
  ...
  gracefulShutdown:
    gracePeriod: 30s
```

- Configure the following parameters in the `ocudr_nudr_export_tool_custom_values.yaml` file:

**Note**

The subscriber export tool must be installed as a separate helm deployment. For information about Migration tool installation, see "Subscriber Export Tool " section in *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*.

- Ensure the secret used to install the subscriber export tool is same as UDR. Configure the `ocudr_nudr_export_tool_custom_values.yaml` file as follows:

```
global:
  dockerRegistry: <docker-registry>:<docker port>/ocudr
  mysql:
    dbServiceName: "<DB Endpoint provided for UDR deployment>"
    port: "<PORT Used provided UDR deployment>"
    ...
  dbCredSecretName: '<UDR Secret>'
  ...
createExportToolPVC:
  ...
  fileExtension: ".exml"
  ...
  ...
sftpDetails:
  ...
  sftpExportEnabled: false
  ...
  ...
ocudrReleaseName: '<UDR Helm name>'
  ...
batch:
  corePoolSize: 1
  maxPoolSize: 1
  exportMode: EXML_EXPORT
```

#### Note

Subscriber export tool must always be clean installed.

- Other configuration details:
  - Configure Prometheus with UDR default alerts. For more information about UDR alerts, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*.
  - Certificates used for UDR-TLS should be provided in `/var/lib/jenkins/ocudr_tests/certs` in ATS pod as defined for `serverheaderFlag` in `values.yaml` file (must be true during UDR installation). For more information, see [Installing ATS for UDR](#).

### 4.8.1.2.2 Provisioning Gateway Custom Values File Configuration for UDR Pipelines

#### Note

For more information about Provisioning Gateway installation and ASM installation for Provisioning Gateway, see *Oracle Communications Cloud Native Core Provisioning Gateway Installation Guide*. The `ProvGW custom-values.yaml` file is available with documentation package on MOS. This section highlights only the necessary changes that are required in the `ProvGW custom-values.yaml` file to run ATS.

- Update the global section of the ProvGW custom-values.yaml file as follows:

```
global:
  dockerRegistry: <docker-registry>:<docker port>/provgw
  mysql:
    dbServiceName: <db service to which UDR should be connected>
    port: &dbPortNumber "3306"
    configdbname: &configdbname <ProvGw DB name>
    dbname: &dbname <ProvGw DB name>
  ...
  createNetworkPolicy: true #only if network policy is supported in the
environment. SLF pipeline to validate network policy supports only default
policy
  ...
  usageMode: "UDR"
```

**Note**

Database names provided in the Provisioning Gateway custom values files must match with the names created in the corresponding database secret.

- Enable the provgw-service parameter as follows:

```
provgw-service:
  ...
  soapService:
    udrIp: <UDR-Prov fqdn>
    udrSignallingIp: <UDR-Sig Fqdn>
    convertToSec: false
    secEntity: |
      - name: QuotaEntity
      elementString: usage
      innerElemenString: quota
    outerFields:
      - version
      - quota
      - SequenceNumber
    innerFields:
      - name
      - cid
      - time
      - totalVolume
      - inputVolume
      - outputVolume
      - serviceSpecific
      - nextResetTime
      - Type
      - grantedTotalVolume
      - grantedInputVolume
      - grantedOutputVolume
      - grantedTime
      - grantedServiceSpecific
      - QuotaState
      - RefInstanceId
```

```
- custom1
- name: DynamicQuotaEntity
elementString: definition
innerElementString: DynamicQuota
outerFields:
  - version
  - DynamicQuota
  - SequenceNumber
innerFields:
  - Type
  - name
  - InstanceId
  - Priority
  - InitialTime
  - InitialTotalVolume
  - InitialInputVolume
  - InitialOutputVolume
  - InitialServiceSpecific
  - activationdatetime
  - expirationdatetime
  - purchaseddatetime
  - Duration
  - InterimReportingInterval
  - custom1
- name: Subscriber
elementString: subscriber
outerFields:
  - IMSI
  - MSISDN
  - NAI
  - EXTID
  - ACCOUNTID
  - BillingDay
  - Entitlement
  - Tier
  - SequenceNumber
  - custom1
  - custom2
  - custom3
  - custom4
  - custom5
  - custom6
  - custom7
  - custom8
  - custom9
  - custom10
  - custom11
  - custom12
  - custom13
  - custom14
  - custom15
- name: StateEntity
elementString: state
innerElementString: property
outerFields:
  - version
```

```

        - property
        - SequenceNumber
    innerFields:
        - name
        - value
    - name: CustomEntity
    elementString: customusage
    innerElementString: customent
    outerFields:
        - version
        - customent
        - SequenceNumber
    innerFields:
        - name
        - custcid
        - custtotal
...
    probes:
        dbStatusCheckUrl: "http://<DB Monitoring svc>:<DB monitoring port>/db-
tier/status/local"

```

- Disable auditor-service and configure auditor-service section as follows:

```

auditor-service:
  enabled: false

```

- Enable the **provgw-config** section as below:

```

provgw-config:
...
  probes:
    dbStatusCheckUrl: "http://<DB Monitoring svc>:<DB monitoring port>/db-
tier/status/local"

```

- Under the **prov-ingressgateway annotations** section, set the **routesConfig** for provgw-service port as '62001'. Ensure the ssl section has secret names and namespace that are created as part of Transport Layer Security (TLS) support. Set the **initssl** and **enableIncomingHttps** parameters as 'true'.

```

prov-ingressgateway:
  deployment:
    ...
    ssl:
      tlsVersion: TLSv1.2,TLSv1.3
      privateKey:
        k8SecretName: <TLS support secret name>
        k8Namespace: <UDR Namespace>
      rsa:
        fileName: <RSA private key pem file>
      ecdsa:
        fileName: <ECDSA private key pem file>

    certificate:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR Namespace>
      rsa:

```

```
    fileName: <RSA certificate>
  ecdsa:
    fileName: <ECDSA certificate>

  caBundle:
    k8SecretName: <TLS support secret name>
    k8Namespace: <UDR namespace>
    fileName: <caBundle file name>

  keyStorePassword:
    k8SecretName: <TLS support secret name>
    k8Namespace: <UDR namespace>
    fileName: <key txt file>

  trustStorePassword:
    k8SecretName: <TLS support secret name>
    k8Namespace: <UDR namespace>
    fileName: <trust txt file>
...
  initssl: true
...
  enableIncomingHttps: true
...
  routesConfig:
  - id: traffic_mapping_rest_group_prov
    uri: http://{{ .Release.Name }}-provgw-service:62001
```

#### Note

For information about Provisioning Gateway installation and ASM configuration for Provisioning Gateway, see *Oracle Communications Cloud Native Core Provisioning Gateway Installation Guide*. This section highlights the necessary changes that you are required to do in the Provisioning Gateway custom-values.yaml file to run ATS.

### 4.8.1.3 Prerequisites for EIR Pipelines

To run EIR Pipelines, you must deploy one EIR, two NRF-stubs, one ATS, subscriber bulk import tool, and subscriber export tool in same namespace.

#### 4.8.1.3.1 UDR Custom Values File Configuration for EIR Pipelines

#### Note

Deploy UDR in the EIR mode. For more information about UDR installation, see *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*. This section highlights only the necessary changes that you are required to do in the UDR custom-values.yaml file to run ATS.

- Update the global section as follows:

```
global:
  dockerRegistry: <docker-registry>:<docker port>/ocudr
  mysql:
    dbServiceName: <db service to which UDR should be connected>
    port: &dbPortNumber "3306"
    configdbname: &configdbname <config db name>
    dbname: &dbname <subscriber db name>
  ...
  dbCredSecretName: <udr secret name>
  ...
  alternateRouteServiceEnable: true
  alternateRouteServiceHost: <udr-helm-release-name>-alternate-route
  ...
  performanceServiceEnable: true
  ...
  udrServices: "n5g-eir-eic"
  ...
  diamGatewayEnable: false
  ...
  appInfoBaseUrl: "<udr-helm-release-name>-nudr-app-info:5906"
  ...
  nrfClientNfManagementEnable: true # value is true for UDR1 deployment;
  UDR2, UDR3 and UDR4 should be deployed with false
  deploymentNrfClientService:
    envNfNamespace: <namespace where UDR is to be deployed>
```

**Note**

Database names provided in the Provisioning Gateway custom values files must match with the names created in the corresponding database secret.

- Update the config-server as follows:

```
config-server:
  fullnameOverride: <udr-helm-release-name>-config-server
```

- Update the ingressgateway-sig as follows:

```
ingressgateway-sig:
  global:
  ...
    lciHeaderConfig:
      enabled: true
      loadThreshold: 30
      localLciHeaderValidity: 10000
  ...
    svcToSvcInstanceIdMapping:
      - svcName: "<udr-helm-release-name>-nudr-drservice"
  ...
    xfccHeaderValidation:
      validation:
        enabled: &xfccValidationEnabled true
```

```

...
service:
  ...
  ssl:
    tlsVersion: TLSv1.2,TLSv1.3
    privateKey:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR Namespace>
      rsa:
        fileName: <RSA private key pem file>
      ecdsa:
        fileName: <ECDSA private key pem file>

    certificate:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR Namespace>
      rsa:
        fileName: <RSA certificate>
      ecdsa:
        fileName: <ECDSA certificate>

    caBundle:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR namespace>
      fileName: <caBundle file name>

    keyStorePassword:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR namespace>
      fileName: <key txt file>

    trustStorePassword:
      k8SecretName: <TLS support secret name>
      k8Namespace: <UDR namespace>
      fileName: <trust txt file>
  ...
serverHeaderDetails:
  enabled: true
...
initssl: true
...
oauthValidatorEnabled: &oauthEnabled true
nfType: 5G_EIR
producerScope: n5g-eir-eic
...
nrfPublicKeyKubeSecret: <oauth secret name>
nrfPublicKeyKubeNamespace: <UDR namespace>
validationType: relaxed
...
...
enableIncomingHttps: true
...
userAgentHeaderValidationConfigMode: REST

```



- Update the ingressgateway-prov as follows:

```

ingressgateway-prov:
  global:
    xfccHeaderValidation:
      validation:
        enabled: &xfccValidationEnabled false
    ...
    serverHeaderDetails:
      enabled: false
    ...
    initssl: true
    ...
    oauthValidatorEnabled: &oauthEnabled true
    nfType: 5G_EIR
    producerScope: n5g-eir-prov
    ...
    nrfPublicKeyKubeSecret: <oauth secret name>
    nrfPublicKeyKubeNamespace: <UDR namespace>
    validationType: relaxed
    ...
    ...
    enableIncomingHttps: true

```

- Configure targets and ports in the alternate-route.staticVirtualFqdns section with the NRF stubs FQDNs and ports.

```

alternate-route:
  staticVirtualFqdns:
    - name: http://abc.test.com
      alternateFqdns:
        - target: <nrf stub1 fqdn>
          port: <nrf stub1 port>
          priority: 10
        - target: <nrf stub2 fqdn>
          port: <nrf stub2 port>
          priority: 20

```

- Update the appinfo section as follows:

```

appinfo:
  ...
  dbStatusUri: http://<DB monitoring SVC>:<DB monitoring svc port>/db-tier/
status/local
  realtimeDbStatusUri: http://<DB monitoring SVC>:<DB monitoring svc
port>/db-tier/status/cluster/local/realtime
  replicationUri: http://<DB monitoring SVC>:<DB monitoring svc port>/db-
tier/status/replication
  ...
  prometheusUrl: "http://<Prometheus fqdn or IP>:<prometheus port>/<domain-
name>/prometheus"
  alertmanagerUrl: "http://<alertmanager fqdn or IP>:<prometheus port>/
<domain-name>/alertmanager"
  ...
  core_services:

```

```
5g_eir: *eir
fullnameOverride: <udr-helm-release-name>-app-info
```

- Update the nrf-client section as follows:

```
nrf-client:
  profile: |
    #uncomment appProfiles that is dedicated to used for EIR mode (n5g-eir-
    eic) and comment the rest of the appProfiles.
    enableVirtualNrfResolution=true
    #virtualNrfFqdn value must be same as that of alternate-
    route.staticVirtualFqdns.name[0] without the url scheme as shown below
    virtualNrfFqdn=abc.test.com
  nrf-client-nfmanagement:
    ...
    replicas: 1
    ...
    enablePDBSupport: false
```

- Update the perf-info section as follows:

```
pperf-info:
  envMySQLDatabase: <configdb name used for UDR>
  ...
  configmapPerformance:
    prometheus: "http://<Prometheus fqdn or IP>:<prometheus port>/<domain-
    name>/prometheus"
  log:
    level:
      perfinfo: "WARN"
```

#### Note

The values for namespace, container name, and servicename depend on CNE or OSO versions. For information, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*..

- Update the egressgateway section as follows:

```
egressgateway:
  userAgentHeaderConfigMode: REST
```

- Configure the following parameters in the bulk-import tool yaml file:

#### Note

To test the subscriber bulk import tool, it is important to install the bulk import tool as a separate helm deployment in the same namespace as that of EIR. For information about the bulk import tool installation and sample bulk import yaml file, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*..

- Ensure the secret is used to install subscriber bulk import tool is same as EIR. Configure the Bulk Import deployment values.yaml file as follows:

```
global:
  mysql:
    dbServiceName: "<DB Endpoint provided for UDR deployment>"
    port: "<PORT Used provided UDR deployment>"
    ...
    dbCredSecretName: '<EIR Secret>'
    ...
  batchConfig:
    asynchronous: false
    ...
  xmlToCsv:
    enabled: false
    ...
  pdbiToCsv:
    enabled: true
    ...
  ocudrReleaseName: '<EIRHelm name>'
```

**Note**

Subscriber bulk import tool must always be clean installed.

- Configure the following parameters in the nudr-export-tool deployment yaml file:

**Note**

To test the subscriber export tool, it is important to install the subscriber export tool as a separate helm deployment in the same namespace as that of UDR. For information about the subscriber export tool installation, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide..*

- Ensure the secret is used to install subscriber export tool is same as EIR. Configure the subscriber export tool deployment values.yaml file as follows:

```
global:
  dockerRegistry: <docker-registry>:<docker port>/ocudr
  mysql:
    dbServiceName: "<DB Endpoint provided for EIR deployment>"
    port: "<PORT Used provided UDR deployment>"
    ...
    dbCredSecretName: '<EIR Secret>'
    ...
  sftpDetails:
    ...
    sftpExportEnabled: false
    ...
  ocudrReleaseName: '<EIR Helm name>'
```

```
...
exportMode: EIR_EXPORT
```

### Note

Subscriber export tool must always be clean installed.

- Other configuration details:
  - Configure Prometheus with EIR default alerts. For more information about EIR alerts, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*.

## 4.8.2 UDR Golden Configuration Support

The ATS golden configuration feature will facilitate the provisioning of customer specific configuration to run test cases. UDR ATS has been integrated with the ATS golden configuration feature. This feature enables the customer to provide their own configuration and save the configuration once the ATS runs are completed.

When running a test, ATS detects the existence of a `<feature_name>.yaml` configuration file within the `<conf_type>_config` directory. ATS will populate the parameterized steps and data files with the values present in the global and feature-specific configuration files. The two configuration types are:

- Product configuration
- Custom configuration

You must use the `custom_config` directory files for provisioning the golden configuration data.

### To Configure ATS Golden Configuration

- Modify the parameter values in the `/ocslf_tests/custom_config/global.yaml` and/or feature config file (`/ocslf_tests/custom_config/<feature>.yaml`).
- Select the `custom_config` in the jenkins pipeline GUI to run the test cases with data provided in the `custom_config` directory.

### ATS Golden Configuration Directory

ATS golden configuration uses the below directories located within the `/var/lib/jenkins/ocslf_tests` directory:

- Parameterized features
  - `features/`
    - \* `cust_newfeatures/`
    - \* `cust_regression/Singlesite/`
- Configuration files
  - `custom_config/`
    - \* `yaml`
    - \* `<feature_name>.yaml`
- Test data
  - `cust_data/`

## Parameterized features

New and regression feature configuration files use the same custom\_config directory.

## ATS Golden Configuration Feature Configuration files

This section describes the ATS golden configuration files:

- The global.yaml configuration file contains Key-Value pair parameters. The Key-Value pair parameters applies to more than one parameterized feature file.
- The Key-Value pair parameters in the <feature>.yaml configuration file includes the following fields:
  - subscriber profile data information
  - cust\_data payload file values
  - data folder name
  - other feature specific fields
- The <feature>.yaml file is divided into scenario specific sections, containing Key-Value pair parameters. Each parameter in the parameterized feature file takes values only from its own scenario File\_Parameters dictionary. You can use the same parameter name in more than one scenario with different scenario specific values.
- When goldenConfig.py is running, each feature config yaml contains the global section at the top between #START\_GLOBAL and #END\_GLOBAL strings.
- Each SLF <feature>.yaml file allows to make the following changes, if applicable:
  - Use global.yaml anchors to copy the values to scenario specific sections that uses the yalm alias. The data folder name is taken from the global section and is used when a behave step is needed to open a json payload file.
  - Provisioning the subscriber profile data.
  - Overwrite data\_folder payload file values. The payload file values will be overwritten in the specified path. The golden configuration feature will overwrite data string with cust\_data even if each path is written with the data directory.
  - Provisioning custom values to feature specific fields.

## Test data

The test data files includes the json payload files used by each feature. A new cust\_data directory, which is a copy of the original data directory, is created to maintain the data directory with product configuration unchanged because the golden configuration feature allows to overwrite data in these json files.

## ATS Golden Configuration backup for SLF and Provisioning Gateway

The SLF and Provisioning Gateway backup process is implemented in the before\_all and after\_all behave hooks to allow ATS pipeline runs to implement feature specific configuration and revert them to the customer specific golden configuration at the end.

ATS Golden Configuration backup Considerations for SLF:

- Backup will be automatically executed for SLF and Provisioning Gateway deployments.
- If failure to export SLF or Provisioning Gateway golden configuration, pipeline execution will be aborted and feature test will not be performed.

- If you fail to import SLF or Provisioning Gateway golden configuration then you are required to manually backup by using 'slfgoldenconfig.zip' and 'provgwgoldenconfig.zip' that is located in ATS pod in the /var/lib/jenkins/ocslf\_tests/ directory.

### Selective Run of Features and Scenarios

For SLF ATS golden configuration support, test execution of certain features is depended on the values set for fields in the ocslf\_tests/custom\_config/global.yaml file. The values provided in the global.yaml must match with the SUT configurations (SLF values.yaml).

```
#START_GLOBAL
global:
  data_folder: &data_folder cust_data
  # To select an appropriate retries value take from SLF values.yaml the
  localLciHeaderValidity value (value in
  # milliseconds) and perform the following formula:
  (localLciHeaderValidity/5000)+1.
  # It is recommended to use 6 as the minimum retries value for igw-sig-
  lciHeaderRequestRetries.
  igw-sig-lciHeaderRequestRetries: &igw-sig-lciHeaderRequestRetries '6'
  # Values provided in this global.yaml should match with the SUT
  configurations (SLF values.yaml).
  alternateRouteServiceEnable: true #true/false
  performanceServiceEnable: true #true/false
  igw-sig-lciheader-enabled: true #true/false
  igw-sig-oauth-enabled: true #true/false
  igw-sig-userAgentHeaderValidationConfigMode: REST #HELM/REST
  igw-sig-userAgentHeaderValidation-enabled: true #true/false
  igw-sig-userAgentHeader-validationType: &igw-sig-userAgentHeader-
  validationType relaxed #relaxed/strict
  igw-prov-oauth-enabled: true #true/false
  nrf-client-enableVirtualNrfResolution: true #true/false
  egw-userAgentHeaderConfigMode: REST #HELM/REST
  egw-userAgentHeader-enabled: true #true/false
  egw-addFqdnToHeader: true #true/false
  egressgateway_nffqdn: &egressgateway_nffqdn udr.oracle.com
  error_logging_enabled: true
#END_GLOBAL
```

### List of Parameterized Features

The below tables provide the list of parameterized features for EIR, SLF, and UDR:

**Table 4-12 Parameterized Features for EIR**

| EIR Feature                      |
|----------------------------------|
| Prometheus_Scenarios.feature     |
| EIR_XFCC.feature                 |
| EIR_User_Agent_Header.feature    |
| EIR_User_AgentHeader_Nrf.feature |
| EIR_TLS_Signalling.feature       |
| EIR_TLS_Provisioning.feature     |
| EIR_Subscriber_Prov.feature      |
| EIR_Signalling.feature           |

**Table 4-12 (Cont.) Parameterized Features for EIR**

| <b>EIR Feature</b>                          |
|---------------------------------------------|
| EIR_Server_Header.feature                   |
| EIR_Provisioning_Err.feature                |
| EIR_PDBI_Import.feature                     |
| EIR_OAuth2_Signalling.feature               |
| EIR_OAuth2_Provisioning.feature             |
| EIR_MGM_API.feature                         |
| EIR_Default_Response.feature                |
| EIR_CSV_Import.feature                      |
| EIR_AccessLog.feature                       |
| EIR_IMEISV.feature                          |
| EIR_IMEISV_Default_Response.feature         |
| EIR_IMEISV_AccessLog.feature                |
| EIR_PDBI_IMEISV_Import.feature              |
| EIR_Subscriber_Export_Tool.feature          |
| EIR_22_4_x_Patch_PDBI_Import.feature        |
| EIR_Validation_Additional_Scenarios.feature |
| EIR_PDBI_Synchronous_Scenarios.feature      |
| EIR_Subscriber_Export_Tool_New.feature      |

**Table 4-13 Parameterized Features for SLF**

| <b>SLF Feature</b>                                 |
|----------------------------------------------------|
| SLF_BulkImport.feature                             |
| ProvGw_Config_ImportExport.feature                 |
| SLF_CHFGroupId.feature                             |
| SLF_DefaultGroupId.feature                         |
| SLF_User_Agent_Header.feature                      |
| SLF_LCI_Header.feature                             |
| SLF_Prov_OAuth2_Validation.feature                 |
| SLF_User_AgentHeader_Nrf.feature                   |
| SLF_LCI_Via_Header.feature                         |
| SLF_Subscriber_Activity_Logging.feature            |
| SLF_Subscriber_Export_Tool.feature                 |
| SLF_Singlesite_NFCS_BulkImport.feature             |
| SLF_Singlesite_NFCS_Nrf_Client_Scenarios.feature   |
| SLF_Singlesite_NFCS_Prometheus_Scenarios.feature   |
| SLF_Singlesite_NFCS_Scenarios.feature              |
| SLF_Singlesite_NFCS_Subscriber_Export_Tool.feature |
| ProvGw_Auditor_Status_API.feature                  |
| SLF_NF_Scoring_Multisite.feature                   |
| SLF_Network_Policy_Validation.feature              |

**Table 4-14 Parameterized Features for UDR**

| UDR Feature                                          |
|------------------------------------------------------|
| UDR_LCI_Header_Via.feature                           |
| UDR_Subscriber_Activity_Logging.feature              |
| UDR_VSA_PCF_Validation.feature                       |
| UDR_PCF_ETag_Validation.feature                      |
| UDR_PCF_ETag_Notify_Validation.feature               |
| UDR_AUTO_Enroll_policy_Data.feature                  |
| UDR_22.4.x_PCF_VSA_GET_DELETE.feature                |
| ProvGw_SOAP_Additional_scenarios.feature             |
| 23_1_1_ProvGw_fixes.feature                          |
| UDR_Mgm_Attribute_Mapping.feature                    |
| UDR_PCF_Auto_Enrollment_New.feature                  |
| UDR_ProvGw_Prov-Headers.feature                      |
| UDR_Quota_Migration_Policy_Sh_Soap.feature           |
| UDR_Network_Policy_Validation.feature                |
| UDR_VSA_Delete_All_Validation.feature                |
| UDR_Quota_Migration_Sh_interface.feature             |
| UDR_Quota_Migration_OnDemand_VSA.feature             |
| UDR_Quota_Migration_OnDemand_Sh.feature              |
| UDR_Quota_Migration_OnDemand_SOAP_ProvPolicy.feature |
| UDR_Quota_Migration_OnDemand_NudrPolicy.feature      |
| UDR_Quota_Migration_OnDemand_Misc.feature            |
| UDR_Network_Policy_Validation.feature                |

### 4.8.3 UDR Application Log Collection

Application log collection enables ATS to collect logs from System Under Test (SUT) when there are scenario failures. User can set log level to one of values mentioned below:

- WARN
- INFO
- DEBUG
- ERROR
- TRACE

Application log collection is enabled or disabled from the Jenkins Graphical User Interface (GUI). By default application log collection is disabled. When the application log collection is enabled you must follow the ATS Persistent Volume Claim (PVC) guidelines to deploy the ATS with appropriate PVC size. Depending on the log type, the PVC size for the ATS will vary. For storing PCAP logs ATS requires more PVC size than the application logs. Logs can be collected for application logs or PCAP logs or both based on the selection provided through the Jenkins GUI. For more information, see [Application Log Collection](#) and [PCAP Log Collection](#).



**Note**

- If the application log collection feature is enabled, it will increase the execution time of the pipeline because some of the steps are executed before and after each scenario. It is recommended to enable the application log collection only if there are consistent failures and pod logs are required to further debug the issues.
- Do not provide any values for Values.k8sResource.container.prefix and Values.k8sResource.container.suffix in the UDR custom values file and do not modify debug tools container name when PCAP logs are collected.

**Configuration**

To configure application log collection before installing ATS follow the steps below:

1. ATS must be deployed with PVC enabled. For more information on PVC configurations. For more information, see [Enabling Persistent Volume](#).
2. For PVC size refer to [ATS PVC Size Calculation](#).
3. SUT must be deployed with debug tools to capture PCAP logs on SLF, UDR, and EIR. For more information, see Pod Security Policy, Role, and Role Binding Creation section in *Oracle Communications Cloud Native Core, Unified Data Repository Installation, Upgrade, and Fault Recovery Guide*.
4. To enable a debug tool containers for UDR and Provision Gateway edit the global section of the custom-values.yaml file of UDR and Provision Gateway. For more information, see Using Debug Tools in *Oracle Communications Cloud Native Core, Unified Data Repository Troubleshooting Guide* and *Oracle Communications Cloud Native Core, Provisioning Gateway Guide*.

To configure application log collection after installing ATS follow the steps below:

1. When the ATS and SUT are installed enable the log collection from the ATS Jenkins GUI. This is available on each pipelines on the BuildWithParameters screen of the UDR ATS. This is currently provided only for NewFeatures and Regression Pipelines.

**Figure 4-85 SLF-NewFeatures BuildWithParameters**

Dashboard > SLF-NewFeatures >

- SLF\_Singlesite\_NFCS\_Scenarios\_01
  - SLF\_Singlesite\_NFCS\_Scenarios\_02\_SBI\_incoming
  - SLF\_Singlesite\_NFCS\_Scenarios\_03\_Prov\_incoming
  - SLF\_Singlesite\_NFCS\_Scenarios\_04\_operationalHistory
  - SLF\_Singlesite\_NFCS\_Scenarios\_05\_Err\_operationalstate
  - SLF\_Singlesite\_NFCS\_Scenarios\_06\_Err
  - SLF\_Singlesite\_NFCS\_Scenarios\_07\_Err\_config
  - SLF\_Singlesite\_NFCS\_Scenarios\_08\_metrics
  - SLF\_Singlesite\_NFCS\_Subscriber\_Export\_Tool
- SLF\_Singlesite\_NFCS\_Subscriber\_Export\_Tool\_01

Fetch\_Log\_Upon\_Failure  
YES

Log\_Type  
☒ AppLog  
☐ PcapLog [Debug Container Should be Running]

Log\_Level  
WARN

Build

2. To enable the application log collection follow the below steps
  - a. From the **Fetch\_Log\_Upon\_Failure** select **YES** from the dropdown list.

- b. From the **Log\_Type** select the required options, **AppLog** or **PcapLog** or both. Follow the below steps depending on the selection and requirement:
  - i. ATS must be deployed with the corresponding PVC size if **AppLog** is selected from the **Log\_Type**.
  - ii. SUT must be deployed with debug tools container and ATS must be deployed with corresponding PVC size if **PcapLog** is selected from the **Log\_Type** or if both **AppLog** and **PcapLog** are selected.
3. Application log collection provides **Log\_Level** values from the dropdown. The log level can be set for all the microservices to capture the SUT log for failure. The possible values for **Log\_Level** are as follows:
  - WARN
  - INFO
  - DEBUG
  - ERROR
  - TRACE

The captured logs for AppLogs, PcapLogs, or both are stored on the PVC and can be accessed from the ATS builds path as follows:

- Run the following command to log in to the ATS pod:

```
$kubectl exec -it <ATS_POD> -n <NAMESPACE> bash
```

- Select the builds path to capture AppLogs and PcapLogs :

```
(env) [jenkins@slfats-ocats-udr-56f76cd668-jzj4d ~]$cd /var/lib/
jenkins/.jenkins/jobs/<JOB-NAME>/builds/<BUILD-NUM>/
```

```
(env) [jenkins@slfats-ocats-udr-56f76cd668-jzj4d ~]$ls -lrt
```

### ATS PVC Guidelines

ATS must be deployed with required PVC storage to store the application logs collected during the ATS pipeline runs for the failed scenarios. The PVC size can vary depending on the following selections:

- ATS\_Type, Pipeline\_Type
- Log\_Type
- Log\_Level
- Number\_of\_pipeline\_runs

The PVC requirement size per scenario for ATS\_Type (SLF-ATS, UDR-ATS, and EIR-ATS) and Log\_Type (AppLogs, PcapLogs, or both), and the minimum memory requirements to store the logs on the PVC are given below:

1. SLF-ATS:
  - AppLogs only: Per failure scenario: 72MB
  - PcapLogs only: Per failure scenario: 554MB
  - AppLogs and PcapLogs: Per failure scenario: 626MB

**2. UDR-ATS:**

- AppLogs only: Per failure scenario: 1MB
- PcapLogs only: Per failure scenario: 12GB
- AppLogs and PcapLogs: Per failure scenario: 13GB

**3. EIR-ATS:**

- AppLogs only: Per failure scenario: 500KB
- PcapLogs only: Per failure scenario: 10GB
- AppLogs and PcapLogs: Per failure scenario: 11GB

**ATS PVC Size Calculation**

The maximum PVC size for a given ATS\_Type, Pipeline\_Type, and Log\_Type are calculated using the below formula:

**Note**

The maximum PVC size must be able to store the logs even if all the scenarios fail in all the runs.

$PVC\_size = \text{Number of scenarios in Pipeline Type} * PVC \text{ requirement per scenario for given type [ATS\_Type or Log\_Type]} * \text{Total runs to be executed.}$

**Example 1:** To capture the application logs for SLF-ATS-NewFeatures and the Log\_Type is set as AppLogs only for 10 pipeline runs, the PVC for ATS is calculated as:

The given SLF-ATS-NewFeatures has 19 scenarios. The memory requirement per scenario is 72MB.

$PVC\_size = 19 * 72MB * 10 = 13GB$ . The maximum PVC size required for ATS is 13 GB.

**Example 2:** To capture the application logs for EIR-ATS-Regression and the Log\_Type is set as PcapLogs only for 1 pipeline run, the PVC for ATS is calculated as:

The given EIR-ATS-Regression has 242 scenarios. The memory requirement per scenario is 10GB.

$PVC\_size = 242 * 10GB * 1 = 2420GB$ . The maximum PVC size required for ATS is 2420 GB.

## 4.8.4 Parallel Test Execution

Parallel test execution allows you to perform multiple logically grouped tests simultaneously on the same System Under Test (SUT) to reduce the overall execution time of ATS.

ATS currently runs all its tests in a sequential manner, which is time-consuming. With parallel test execution, tests can be run concurrently rather than sequentially or one at a time. Test cases or feature files are now separated into different folders, such as stages and groups, for concurrent test execution. Different stages, such as stage 1, stage 2, and stage 3, run the test cases in a sequential order, and each stage has its own set of groups. For more information about Parallel Test Execution, see [Parallel Test Execution](#).

**SLF ATS Stages and Groups**

Following table provides different stages and groups for SLF ATS:

**Table 4-15 SLF ATS Stages and Groups**

| Single Site Stages and Groups                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Multiple Site Stages and Groups                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Singlesite/<br>├── Stage_1<br>├── bulk_import_basics<br>├── behave.ini<br>└── SLF_BulkImport.feature<br>├── export_tool_basics<br>├── behave.ini<br>└── SLF_Subscriber_Export_Tool.feature<br>├── independent_features<br>├── behave.ini<br>└── SLF_Network_Policy_Validation.feature<br>├── SLF_Sbi_Correlation_Header.feature<br>├── ingressgateway_features<br>├── behave.ini<br>└── SLF_Ingress_XFCC_Header.feature<br>├── SLF_LCI_Via_Header.feature<br>├── SLF_OAuth2_Validation.feature<br>├── SLF_Prov_OAuth2_Validation.feature<br>├── SLF_Server_Header.feature<br>├── nrf-client<br>└── behave.ini | Multisite/<br>├── Multi_Site<br>├── two_site<br>├── behave.ini<br>├── SLF_Multisite.feature<br>├── SLF_Multisite_NFCS_Scenarios.feature<br>└── SLF_NF_Scoring_Multisite.feature |

Table 4-15 (Cont.) SLF ATS Stages and Groups

| Single Site Stages and Groups                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Multiple Site Stages and Groups |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| <pre>               Prometheus_Scenarios_NrfClient.feature                             SLF_Dns_Srv.feature               SLF_Nrf_Client_Scenarios.feature               SLF_User_AgentHeader_Nrf.feature                             provgw                             behave.ini               Prometheus_Scenarios_ProvGw.feature               ProvGw_Basic_Func_Error.feature               ProvGw_Basic_Func_Success.feature               ProvGw_CHFGroupId.feature               ProvGw_Data_Mismatch.feature               ProvGw_SSL_Enabled.feature                             slf_basics                             behave.ini                             SLF_CHFGroupId.feature               SLF_Prov_and_Lookup_NonMetric.feature                             Stage_2                             provgw_config                             behave.ini </pre> |                                 |

Table 4-15 (Cont.) SLF ATS Stages and Groups

| Single Site Stages and Groups                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Multiple Site Stages and Groups |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| <ul style="list-style-type: none"> <li>    └─ Provgw_Config.feature</li> <li>  └─ slf_config</li> <li>  └─ behave.ini</li> <li>  └─</li> <li>SLF_DefaultGroupId.feature</li> <li>  └─ SLF_Mgm_Apis.feature</li> <li>  └─</li> <li>SLF_Subscriber_Activity_Logging.feature</li> <li>└─ Stage_3 <ul style="list-style-type: none"> <li>└─ sequential_execution <ul style="list-style-type: none"> <li>└─ behave.ini</li> <li>└─</li> </ul> </li> </ul> </li> <li>Prometheus_Scenarios.feature <ul style="list-style-type: none"> <li>└─ ProvGw_Auditor.feature</li> <li>└─</li> </ul> </li> <li>ProvGw_Auditor_Status_API.feature <ul style="list-style-type: none"> <li>└─</li> </ul> </li> <li>ProvGw_Config_ImportExport.feature <ul style="list-style-type: none"> <li>└─ ProvGw_Loglevel.feature</li> <li>└─ ProvGw_Segdown.feature</li> <li>└─</li> </ul> </li> <li>SLF_Config_Import_Export.feature <ul style="list-style-type: none"> <li>└─ SLF_LCI_Header.feature</li> <li>└─ SLF_LogLevels.feature</li> <li>└─ SLF_NF_Scoring.feature</li> <li>└─</li> </ul> </li> <li>SLF_Prov_and_Lookup_Metric.feature</li> </ul> |                                 |

Table 4-15 (Cont.) SLF ATS Stages and Groups

| Single Site Stages and Groups                                                                                                                                                                                                                                                                                                                                                                  | Multiple Site Stages and Groups |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| <div>SLF_Singlesite_NFCS_BulkImport.feature</div> <div>SLF_Singlesite_NFCS_Nrf_Client_Scenarios.feature</div> <div>SLF_Singlesite_NFCS_Prometheus_Scenarios.feature</div> <div>SLF_Singlesite_NFCS_Scenarios.feature</div> <div>SLF_Singlesite_NFCS_Subscriber_Export_Tool.feature</div> <div>SLF_Subscriber_Activity_Logging_Loglevels.feature</div> <div>SLF_User_Agent_Header.feature</div> |                                 |

UDR ATS Stages and Groups

Following table provides different stages and groups for UDR ATS:

### Table 4-16 UDR ATS Stages and Groups

| UDR New Feature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | UDR Regression (Single Site) | UDR Regression (Multiple Site) |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|--------------------------------|
| <div><div>Singlesite/<div><div>└─ All</div><div>└─ Stage_1</div></div><div>sequential_execution</div><div>behave.ini</div><div>UDR_Bulk_Import_PNR_Vali<br/>dation.feature</div><div>UDR_PUR_Scenarios.featur<br/>e</div><div>UDR_Quota_Dq_Additional_<br/>Scenarios.feature</div><div>UDR_Sm_Data_Dnn_Schema_V<br/>alidation.feature</div><div>UDR_Subscriber_Export_To<br/>ol.feature</div><div>└─ MISCELLANEOUS</div><div>└─ Stage_1</div><div>sequential_execution</div><div>behave.ini</div><div>UDR_Bulk_Import_PNR_Vali<br/>dation.feature</div><div>UDR_PUR_Scenarios.featur<br/>e</div></div></div> <div><div>Singlesite/<div><div>└─ All</div><div>└─ Stage_1</div></div><div>bulk_import_metrics_auto<br/>create_true</div><div>behave.ini</div><div>UDR_Bulk_Import.feature</div><div>UDR_Bulk_Import_ixml_par<br/>t1.feature</div><div>UDR_Bulk_Import_PolicyAn<br/>dVsa.feature</div><div>UDR_ProvGw_Prov-Headers.<br/>feature</div><div>diameter_only_metrics</div><div>behave.ini</div><div>Diameter_All_Entities.fe<br/>ature</div><div>Diameter_Config.feature</div><div>Diameter_Misc.feature</div><div>Diameter_User_Data.featu<br/>re</div><div>UDR_22_4_1_Diameter.featur<br/>e</div><div>UDR_23_1_0_Diameter.featur<br/>e</div><div>UDR_23_2_0_Diameter.featur<br/>e</div><div>UDR_All_Migration_State_<br/>Entity_part1.feature</div><div>UDR_Migration_tool_Addit<br/>ional_scenarios.feature</div></div></div> <div><div>Multisite/<div><div>└─ Multi_Site</div><div>└─ two_site</div><div>└─ behave.ini</div></div><div>UDR_Multisite.feature</div></div></div> |                              |                                |



Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature                           | UDR Regression (Single Site)                   | UDR Regression (Multiple Site) |
|-------------------------------------------|------------------------------------------------|--------------------------------|
| UDR_Quota_Dq_Additional_Scenarios.feature | UDR_Migration_tool_part1.feature               |                                |
|                                           | nrf_only_metrics                               |                                |
| UDR_Sm_Data_Dnn_Schema_Validation.feature | behave.ini                                     |                                |
|                                           | UDR_NRFclient_DNS_Srv.feature                  |                                |
| UDR_Subscriber_Export_Tool.feature        | UDR_NRFclient_Scenarios.feature                |                                |
|                                           | UDR_User_AgentHeader_Nrf.feature               |                                |
|                                           | oauth2_only_metrics                            |                                |
|                                           | behave.ini                                     |                                |
|                                           | UDR_OAuth2_Validation.feature                  |                                |
|                                           | UDR_PCF_Prov_OAuth2_Validation.feature         |                                |
|                                           | UDR_UDM_Prov_OAuth2_Validation.feature         |                                |
|                                           | pcf_subscription_no_metrics                    |                                |
|                                           | behave.ini                                     |                                |
|                                           | UDR_PCF_DELETE.feature                         |                                |
|                                           | UDR_PCF_SMDData_Patch.feature                  |                                |
|                                           | UDR_Subscriber_Policy_Data.feature             |                                |
|                                           | UDR_UDM_API_SDM_Subscription.feature           |                                |
|                                           | UDR_UDM_Subscription_Data_Subscription.feature |                                |
|                                           | vsa_no_metrics                                 |                                |

**Table 4-16 (Cont.) UDR ATS Stages and Groups**

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | UDR Regression (Multiple Site) |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | <div><div></div><div>behave.ini</div><div></div><div>UDR_22.4.x_PCF_VSA_GET_D<br/>ELETE.feature</div><div></div><div>UDR_VSA_PATCH_Fix.featur<br/>e</div><div></div><div>UDR_VSA_PCF_Validation.f<br/>eature</div><div></div><div>Stage_2</div><div></div><div>bulk_import_autocreate_f<br/>alse</div><div></div><div>behave.ini</div><div></div><div>UDR_Bulk_Import_ixml_par<br/>t2.feature</div><div></div><div>no_igw_dr_metrics</div><div></div><div>behave.ini</div><div></div><div>UDR_PCF_ETag_Notify_Vali<br/>dation.feature</div><div></div><div>UDR_PCF_Notification_New<br/>_API.feature</div><div></div><div>UDR_PCF_User_Agent_Heade<br/>r.feature</div><div></div><div>UDR_Suppressed_Notificat<br/>ions.feature</div><div></div><div>UDR_UDM_Notification.fea<br/>ture</div><div></div><div>UDR_UDM_UserAgent_Header<br/>.feature</div><div></div><div>UDR_User_AgentHeader_Not<br/>ification.feature</div><div></div><div>Stage_3</div><div></div><div>provgw_no_igw_dr_metrics</div><div></div></div> |                                |

**Table 4-16 (Cont.) UDR ATS Stages and Groups**





| UDR New Feature | UDR Regression (Single Site)                                                                                                             | UDR Regression (Multiple Site) |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | 23_1_1_ProvGw_fixes.feature<br>                        |                                |
|                 | behave.ini<br>                                         |                                |
|                 | ProvGw_SOAP_Additional_s<br>cenarios.feature<br>       |                                |
|                 | ProvGw_SOAP_CNCEsUDR82_m<br>isc.feature<br>            |                                |
|                 | ProvGw_SOAP_ConvertToSec<br>_strict.feature<br>        |                                |
|                 | ProvGw_SOAP_Custom_Entit<br>ies.feature<br>            |                                |
|                 | ProvGw_SOAP_Custom_Field<br>s.feature<br>              |                                |
|                 | ProvGw_SOAP_Format_Tags.<br>feature<br>              |                                |
|                 | ProvGw_SOAP_GetSubscript<br>ion.feature<br>          |                                |
|                 | ProvGw_SOAP_Misc.feature<br>                         |                                |
|                 | ProvGw_SOAP_Reset_Quota.<br>feature<br>              |                                |
|                 | ProvGw_SOAP_SSL.feature<br>                          |                                |
|                 | ProvGw_SOAP_Subscriber_E<br>ntities.feature<br>      |                                |
|                 | ProvGw_SOAP_Subscriber_E<br>ntity_Fields.feature<br> |                                |
|                 | ProvGw_SOAP_Subscriber_F<br>ields.feature<br>        |                                |
|                 | ProvGw_SOAP_Subscriber_P<br>rofile.feature<br>       |                                |
|                 | UDM_SUBS_Enhancements_No<br>n_Metrics.feature<br>    |                                |
|                 | udr_no_igw_dr_metrics<br>                            |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | UDR Regression (Multiple Site) |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | <br>behave.ini<br> <br>UDR_EGW_LCI_Header.feature<br> <br>UDR_LCI_Header_Via.feature<br> <br>UDR_SCP_Routing.feature<br> <br>UDR_SM_Data_Custom_Data_Enhancements.feature<br> <br>UDR_VSA_Notifications.feature<br> <br> <br> <br>sequential_execution<br> <br>behave.ini<br> <br>ProvGw_SOAP_AndUDR_VSA_New.feature<br> <br>ProvGw_SOAP_Bug_Fixes.feature<br> <br>UDM_SUBS_Enhancements_Metrics.feature<br> <br>UDR_23_2_0_Bug_fixes.feature<br> <br>UDR_All_Migration_State_Entity_rest_metric.feature<br> <br>UDR_AUTO_Enroll_policy_Data.feature<br> <br>UDR_Bulk_Import_All_metrics.feature<br> <br>UDR_Bulk_Import_Configuration_validation.feature<br> <br>UDR_Bulk_Import_ixml_bug_fixes.feature |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)           | UDR Regression (Multiple Site) |
|-----------------|----------------------------------------|--------------------------------|
|                 | UDR_Bulk_Import_VSA.feature            |                                |
|                 | UDR_Config_Import_Export.feature       |                                |
|                 | UDR_Config_Service.feature             |                                |
|                 | UDR_Custom_Fields_Profile.feature      |                                |
|                 | UDR_Diameter_CER_Changes.feature       |                                |
|                 | UDR_Diameter_Ondemand_Mig.feature      |                                |
|                 | UDR_Egw_TLS.feature                    |                                |
|                 | UDR_IGW_LCI_Header.feature             |                                |
|                 | UDR_Log_Level.feature                  |                                |
|                 | UDR_Mgm_Attribute_Mapping.feature      |                                |
|                 | UDR_Migration_tool_part2.feature       |                                |
|                 | UDR_Misc_Metrics_Alerts.feature        |                                |
|                 | UDR_NEF_AM_Data.feature                |                                |
|                 | UDR_NEF_MGM_APIs.feature               |                                |
|                 | UDR_NEF_Misc.feature                   |                                |
|                 | UDR_NEF_Notification.feature           |                                |
|                 | UDR_NEF_Prov.feature                   |                                |
|                 | UDR_NEF_Prov_OAuth2_Validation.feature |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | UDR Regression (Multiple Site) |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | UDR_NEF_SM_Data.feature<br> <br>UDR_NEF_Subscription.fe<br>ature<br> <br>UDR_Network_Policy_Valid<br>ation.feature<br> <br>UDR_New_Log_Level.featur<br>e<br> <br>UDR_PCF_Auto_Enrollment_<br>New.feature<br> <br>UDR_PCF_ETag_Validation.<br>feature<br> <br>UDR_PCF_MGM_APIs.feature<br> <br>UDR_PCF_New_API_AllData.<br>feature<br> <br>UDR_PCF_New_API_AM.featu<br>re<br> <br>UDR_PCF_New_API_SM.featu<br>re<br> <br>UDR_PCF_New_API_Subscrip<br>tion.feature<br> <br>UDR_PCF_New_API_UeData.f<br>eature<br> <br>UDR_PCF_New_API_UMD.featu<br>re<br> <br>UDR_PCF_New_Server_Heade<br>r.feature<br> <br>UDR_PCF_Ondemand.feature<br> <br>UDR_PCF_Sbi_Correlation_<br>Header.feature<br> <br>UDR_PCF_User_Agent_Heade<br>r_New.feature<br> <br>UDR_PCF_VSA_Diameter.fea |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | UDR Regression (Multiple Site) |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | ture<br> <br>UDR_PCF_VSA_ETag_New.fea<br>ture<br> <br>UDR_Profile_Data_New.fea<br>ture<br> <br>UDR_Prov_Policy_Ondemand<br>.feature<br> <br>UDR_Quota_Migration_OnDe<br>mand_Misc.feature<br> <br>UDR_Quota_Migration_OnDe<br>mand_NudrPolicy.feature<br> <br>UDR_Quota_Migration_OnDe<br>mand_Sh.feature<br> <br>UDR_Quota_Migration_OnDe<br>mand_SOAP_ProvPolicy.fea<br>ture<br> <br>UDR_Quota_Migration_OnDe<br>mand_VSA.feature<br> <br>UDR_Quota_Migration_Poli<br>cy_Sh_Soap.feature<br> <br>UDR_Quota_Migration_Sh_i<br>nterface.feature<br> <br>UDR_SMDData_Custom_Fields<br>.feature<br> <br>UDR_Subscriber_Activity_<br>Logging.feature<br> <br>UDR_TLS_Enable.feature<br> <br>UDR_UDM_API_Additional_E<br>rr.feature<br> <br>UDR_UDM_API_Authenticati<br>on_Data.feature<br> <br>UDR_UDM_API_Context_Data<br>.feature |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                          | UDR Regression (Multiple Site) |
|-----------------|-------------------------------------------------------|--------------------------------|
|                 | UDR_UDM_API_EE_Profile_Data.feature                   |                                |
|                 | UDR_UDM_API_Identity_Data.feature                     |                                |
|                 | UDR_UDM_API_Operator_Determined_Barring_Data.feature  |                                |
|                 | UDR_UDM_API_Operator_Specific_Data.feature            |                                |
|                 | UDR_UDM_API_Provisioned_Data.feature                  |                                |
|                 | UDR_UDM_API_Provisioned_parameter_Data.feature        |                                |
|                 | UDR_UDM_API_UE_Update_Confirmation_Data.feature       |                                |
|                 | UDR_UDM_Mgm_Apis.feature                              |                                |
|                 | UDR_UDM_Prov_Authentication_Data.feature              |                                |
|                 | UDR_UDM_Prov_Context_Data.feature                     |                                |
|                 | UDR_UDM_Prov_EE_Profile_Data.feature                  |                                |
|                 | UDR_UDM_Prov_Identity_Data.feature                    |                                |
|                 | UDR_UDM_Prov_Operator_Determined_Barring_Data.feature |                                |
|                 | UDR_UDM_Prov_Operator_Specific_Data.feature           |                                |
|                 | UDR_UDM_Prov_Provisioned_Data.feature                 |                                |
|                 | UDR_UDM_Prov_Provisioned_Parameter_Data.feature       |                                |



Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | UDR Regression (Multiple Site) |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | UDR_UDM_Prov_UE_Update_Confirmation_Data.feature<br>UDR_UDM_Sbi_Correlation_Header.feature<br>UDR_VSA_Delete_All_Validation.feature<br>UDR_Vsa_Ondemand.feature<br>UDR_XFCC.feature<br>VSA_SMPOLICY.feature<br>BULK-IMPORT<br>Stage_1<br>bulk_import_metrics_auto_create_true<br>behave.ini<br>UDR_Bulk_Import.feature<br>UDR_Bulk_Import_ixml_part1.feature<br>UDR_Bulk_Import_PolicyAndVsa.feature<br>Stage_2<br>bulk_import_autocreate_false<br>behave.ini<br>UDR_Bulk_Import_ixml_part2.feature<br>Stage_4<br>sequential_execution<br>behave.ini<br>UDR_Bulk_Import_All_metrics.feature<br>UDR_Bulk_Import_ixml_bug |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | UDR Regression (Multiple Site) |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | _fixes.feature<br> <br>UDR_Bulk_Import_VSA.feature<br> <br> —— CONFIG<br>       —— Stage_4<br> <br>sequential_execution<br> <br>behave.ini<br> <br>UDR_Bulk_Import_Configuration_validation.feature<br> <br>UDR_Config_Import_Export.feature<br> <br>UDR_Config_Service.feature<br> <br>UDR_New_Log_Level.feature<br> <br> —— DIAMETER<br>       —— Stage_1<br> <br>diameter_only_metrics<br> <br>behave.ini<br> <br>Diameter_All_Entities.feature<br> <br>Diameter_Config.feature<br> <br>Diameter_Misc.feature<br> <br>Diameter_User_Data.feature<br> <br>UDR_22_4_1_Diameter.feature<br> <br>UDR_23_1_0_Diameter.feature<br> <br>UDR_23_2_0_Diameter.feature<br> <br> —— MISCELLANEOUS<br>       —— Stage_1 |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | UDR Regression (Multiple Site) |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | <br>bulk_import_metrics_auto<br>create_true<br>                   <br>behave.ini<br>                   <br>UDR_ProvGw_Prov-Headers.<br>feature<br>                   <br>diameter_only_metrics<br>                   <br>behave.ini<br>                   <br>UDR_All_Migration_State_<br>Entity_part1.feature<br>                   <br>UDR_Migration_tool_Addit<br>ional_scenarios.feature<br>                   <br>UDR_Migration_tool_part1<br>.feature<br>                   <br>nrf_only_metrics<br>                   <br>behave.ini<br>                   <br>UDR_User_AgentHeader_Nrf<br>.feature<br>                   <br>oauth2_only_metrics<br>                   <br>behave.ini<br>                   <br>UDR_OAuth2_Validation.fe<br>ature<br>                   <br>                    Stage_2<br>                   <br>no_igw_dr_metrics<br>                   <br>behave.ini<br>                   <br>UDR_Suppressed_Notificat<br>ions.feature<br>                   <br>UDR_User_AgentHeader_Not<br>ification.feature<br>                   <br>                    Stage_3<br>                   <br>provgw_no_igw_dr_metrics |                                |

**Table 4-16 (Cont.) UDR ATS Stages and Groups**

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | UDR Regression (Multiple Site) |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | <br>23_1_1_ProvGw_fixes.feature<br>       <br>behave.ini<br>       <br>ProvGw_SOAP_Additional_scenarios.feature<br>       <br>ProvGw_SOAP_CNCEsUDR82_misc.feature<br>       <br>ProvGw_SOAP_ConvertToSec_strict.feature<br>       <br>ProvGw_SOAP_Custom_Entities.feature<br>       <br>ProvGw_SOAP_Custom_Fields.feature<br>       <br>ProvGw_SOAP_Format_Tags.feature<br>       <br>ProvGw_SOAP_GetSubscription.feature<br>       <br>ProvGw_SOAP_Misc.feature<br>       <br>ProvGw_SOAP_Reset_Quota.feature<br>       <br>ProvGw_SOAP_SSL.feature<br>       <br>ProvGw_SOAP_Subscriber_Entities.feature<br>       <br>ProvGw_SOAP_Subscriber_Entity_Fields.feature<br>       <br>ProvGw_SOAP_Subscriber_Fields.feature<br>       <br>ProvGw_SOAP_Subscriber_Profile.feature<br>       <br>udr_no_igw_dr_metrics<br>       <br>behave.ini |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                       | UDR Regression (Multiple Site) |
|-----------------|----------------------------------------------------|--------------------------------|
|                 | UDR_EGW_LCI_Header.feature                         |                                |
|                 | UDR_LCI_Header_Via.feature                         |                                |
|                 | UDR_SCP_Routing.feature                            |                                |
|                 | Stage_4                                            |                                |
|                 | sequential_execution                               |                                |
|                 | behave.ini                                         |                                |
|                 | ProvGw_SOAP_AndUDR_VSA_New.feature                 |                                |
|                 | ProvGw_SOAP_Bug_Fixes.feature                      |                                |
|                 | UDR_23_2_0_Bug_fixes.feature                       |                                |
|                 | UDR_All_Migration_State_Entity_rest_metric.feature |                                |
|                 | UDR_Custom_Fields_Profile.feature                  |                                |
|                 | UDR_Diameter_CER_Changes.feature                   |                                |
|                 | UDR_Egw_TLS.feature                                |                                |
|                 | UDR_IGW_LCI_Header.feature                         |                                |
|                 | UDR_Log_Level.feature                              |                                |
|                 | UDR_Migration_tool_part2.feature                   |                                |
|                 | UDR_Misc_Metrics_Alerts.feature                    |                                |
|                 | UDR_Network_Policy_Validation.feature              |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                         | UDR Regression (Multiple Site) |
|-----------------|------------------------------------------------------|--------------------------------|
|                 | UDR_PCF_VSA_Diameter.feature                         |                                |
|                 |                                                      |                                |
|                 | UDR_PCF_VSA_ETag_New.feature                         |                                |
|                 |                                                      |                                |
|                 | UDR_Quota_Migration_OnDemand_Misc.feature            |                                |
|                 |                                                      |                                |
|                 | UDR_Quota_Migration_OnDemand_NudrPolicy.feature      |                                |
|                 |                                                      |                                |
|                 | UDR_Quota_Migration_OnDemand_Sh.feature              |                                |
|                 |                                                      |                                |
|                 | UDR_Quota_Migration_OnDemand_SOAP_ProvPolicy.feature |                                |
|                 |                                                      |                                |
|                 | UDR_Quota_Migration_OnDemand_VSA.feature             |                                |
|                 |                                                      |                                |
|                 | UDR_Quota_Migration_Policy_Sh_Soap.feature           |                                |
|                 |                                                      |                                |
|                 | UDR_Quota_Migration_Sh_interface.feature             |                                |
|                 |                                                      |                                |
|                 | UDR_Subscriber_Activity_Logging.feature              |                                |
|                 |                                                      |                                |
|                 | UDR_UDM_Mgm_Apis.feature                             |                                |
|                 |                                                      |                                |
|                 | UDR_VSA_Delete_All_Validation.feature                |                                |
|                 |                                                      |                                |
|                 | UDR_XFCC.feature                                     |                                |
|                 |                                                      |                                |
|                 | NEF                                                  |                                |
|                 |                                                      |                                |
|                 | Stage_4                                              |                                |
|                 |                                                      |                                |
|                 | sequential_execution                                 |                                |
|                 |                                                      |                                |
|                 | behave.ini                                           |                                |
|                 |                                                      |                                |
|                 | UDR_NEF_AM_Data.feature                              |                                |
|                 |                                                      |                                |
|                 | UDR_NEF_MGM_APIs.feature                             |                                |
|                 |                                                      |                                |
|                 | UDR_NEF_Misc.feature                                 |                                |

**Table 4-16 (Cont.) UDR ATS Stages and Groups**

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | UDR Regression (Multiple Site) |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | <div><div>UDR_NEF_Notification.feature</div><div>UDR_NEF_Prov.feature</div><div>UDR_NEF_Prov_OAuth2_Validation.feature</div><div>UDR_NEF_SM_Data.feature</div><div>UDR_NEF_Subscription.feature</div><div><div>NRF-CLIENT</div><div>Stage_1</div></div><div>nrf_only_metrics</div><div>behave.ini</div><div>UDR_NRFclient_DNS_Srv.feature</div><div>UDR_NRFclient_Scenarios.feature</div><div><div>ONDEMAND</div><div>Stage_4</div></div><div>sequential_execution</div><div>behave.ini</div><div>UDR_Diameter_Ondemand_Mig.feature</div><div>UDR_PCF_Ondemand.feature</div><div>UDR_Prov_Policy_Ondemand.feature</div><div>UDR_Vsa_Ondemand.feature</div><div><div>PCF</div><div>Stage_1</div></div><div>oauth2_only_metrics</div><div>behave.ini</div><div>UDR_PCF_Prov_OAuth2_Vali</div></div> |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | UDR Regression (Multiple Site) |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | dation.feature<br>             <br>pcf_subscription_no_metr<br>ics<br>                         <br>behave.ini<br>                         <br>UDR_PCF_DELETE.feature<br>                         <br>UDR_PCF_SMDData_Patch.fea<br>ture<br>                         <br>UDR_Subscriber_Policy_Da<br>ta.feature<br>                                     <br>                                                                         <br>no_igw_dr_metrics<br>                         <br>behave.ini<br>                         <br>UDR_PCF_ETag_Notify_Vali<br>dation.feature<br>                         <br>UDR_PCF_Notification_New<br>_API.feature<br>                         <br>UDR_PCF_User_Agent_Heade<br>r.feature<br>                                     <br>                                                                         <br>udr_no_igw_dr_metrics<br>                         <br>behave.ini<br>                         <br>UDR_SM_Data_Custom_Data_<br>Enhancements.feature<br>                                     <br>                                                                         <br>sequential_execution<br>                         <br>behave.ini<br>                         <br>UDR_AUTO_Enroll_policy_D<br>ata.feature<br>                         <br>UDR_Mgm_Attribute_Mappin<br>g.feature<br>                         <br>UDR_PCF_Auto_Enrollment_ |                                |



**Table 4-16 (Cont.) UDR ATS Stages and Groups**

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | UDR Regression (Multiple Site) |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | <div>New.feature<br/> <br/>UDR_PCF_ETag_Validation.feature<br/> <br/>UDR_PCF_MGM_APIs.feature<br/> <br/>UDR_PCF_New_API_AllData.feature<br/> <br/>UDR_PCF_New_API_AM.feature<br/> <br/>UDR_PCF_New_API_SM.feature<br/> <br/>UDR_PCF_New_API_Subscription.feature<br/> <br/>UDR_PCF_New_API_UeData.feature<br/> <br/>UDR_PCF_New_API_UMD.feature<br/> <br/>UDR_PCF_New_Server_Header.feature<br/> <br/>UDR_PCF_Sbi_Correlation_Header.feature<br/> <br/>UDR_PCF_User_Agent_Header_New.feature<br/> <br/>UDR_Profile_Data_New.feature<br/> <br/>UDR_SMDData_Custom_Fields.feature<br/> <br/>UDR_TLS_Enable.feature<br/>  UDM<br/>    Stage_1<br/>     <br/>oauth2_only_metrics<br/>     <br/>behave.ini<br/>     <br/>UDR_UDM_Prov_OAuth2_Vali</div> |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | UDR Regression (Multiple Site) |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | dation.feature<br> <br>pcf_subscription_no_metr<br>ics<br> <br>behave.ini<br> <br>UDR_UDM_API_SDM_Subscrip<br>tion.feature<br> <br>UDR_UDM_Subscription_Dat<br>a_Subscription.feature<br> <br> <br>Stage_2<br> <br>no_igw_dr_metrics<br> <br>behave.ini<br> <br>UDR_UDM_Notification.fea<br>ture<br> <br>UDR_UDM_UserAgent_Header<br>.feature<br> <br> <br>Stage_3<br> <br>provgw_no_igw_dr_metrics<br> <br>behave.ini<br> <br>UDM_SUBS_Enhancements_No<br>n_Metrics.feature<br> <br> <br>Stage_4<br> <br>sequential_execution<br> <br>behave.ini<br> <br>UDM_SUBS_Enhancements_Me<br>trics.feature<br> <br>UDR_UDM_API_Additional_E<br>rr.feature<br> <br>UDR_UDM_API_Authenticati<br>on_Data.feature<br> <br>UDR_UDM_API_Context_Data<br>.feature<br> |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                          | UDR Regression (Multiple Site) |
|-----------------|-------------------------------------------------------|--------------------------------|
|                 | UDR_UDM_API_EE_Profile_Data.feature                   |                                |
|                 | UDR_UDM_API_Identity_Data.feature                     |                                |
|                 | UDR_UDM_API_Operator_Determined_Barring_Data.feature  |                                |
|                 | UDR_UDM_API_Operator_Specific_Data.feature            |                                |
|                 | UDR_UDM_API_Provisioned_Data.feature                  |                                |
|                 | UDR_UDM_API_Provisioned_parameter_Data.feature        |                                |
|                 | UDR_UDM_API_UE_Update_Confirmation_Data.feature       |                                |
|                 | UDR_UDM_Prov_Authentication_Data.feature              |                                |
|                 | UDR_UDM_Prov_Context_Data.feature                     |                                |
|                 | UDR_UDM_Prov_EE_Profile_Data.feature                  |                                |
|                 | UDR_UDM_Prov_Identity_Data.feature                    |                                |
|                 | UDR_UDM_Prov_Operator_Determined_Barring_Data.feature |                                |
|                 | UDR_UDM_Prov_Operator_Specific_Data.feature           |                                |
|                 | UDR_UDM_Prov_Provisioned_Data.feature                 |                                |
|                 | UDR_UDM_Prov_Provisioned_Parameter_Data.feature       |                                |
|                 | UDR_UDM_Prov_UE_Update_Confirmation_Data.feature      |                                |

Table 4-16 (Cont.) UDR ATS Stages and Groups

| UDR New Feature | UDR Regression (Single Site)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | UDR Regression (Multiple Site) |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
|                 | <div><div></div><div>UDR_UDM_Sbi_Correlation_Header.feature</div><div><div>VSA</div><div><div>Stage_1</div></div></div><div>vsa_no_metrics</div><div><div>behave.ini</div></div><div>UDR_22.4.x_PCF_VSA_GET_DELETE.feature</div><div><div>UDR_VSA_PATCH_Fix.feature</div></div><div>UDR_VSA_PCF_Validation.feature</div><div><div>Stage_3</div></div><div>udr_no_igw_dr_metrics</div><div><div>behave.ini</div></div><div>UDR_VSA_Notifications.feature</div><div><div>Stage_4</div></div><div>sequential_execution</div><div><div>behave.ini</div></div><div>VSA_SMPOLICY.feature</div></div> |                                |

EIR ATS Stages and Groups

Following table provides different stages and groups for EIR ATS:

Table 4-17 EIR ATS Stages and Groups

| EIR NewFeatures                                                                                            | EIR Regression                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| cust_newfeatures/<br>└─ Stage_1<br>└─ eir_basics<br>└─ behave.ini<br>└─<br>EIR_ErrorResponseDetail.feature | cust_regression/<br>└─ Stage_1<br>└─ bulk_import_basics<br>└─ behave.ini<br>└─<br>EIR_22_4_x_Patch_PDBI_Import.feature<br>└─ EIR_CSV_Import.feature<br>└─<br>EIR_PDBI_IMEISV_Import.feature<br>└─<br>EIR_PDBI_Import.feature<br>└─<br>Prometheus_bulk_import.feature<br>└─ eir_basics<br>└─ behave.ini<br>└─<br>EIR_Provisioning_Err.feature<br>└─<br>EIR_TLS_Provisioning.feature<br>└─<br>EIR_TLS_Signalling.feature<br>└─<br>EIR_Validation_Additional_Scenarios.f<br>eature<br>└─ export_tool_basics<br>└─ behave.ini<br>└─<br>EIR_Subscriber_Export_Tool.feature<br>└─<br>EIR_Subscriber_Export_Tool_New.featur<br>e |

**Table 4-17 (Cont.) EIR ATS Stages and Groups**

| EIR NewFeatures | EIR Regression                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 | <div><div>ingressgateway_features</div><div>behave.ini</div><div>EIR_OAuth2_Provisioning.feature</div><div>EIR_OAuth2_Signalling.feature</div><div>EIR_Server_Header.feature</div><div>EIR_XFCC.feature</div><div>nrf-client</div><div>behave.ini</div><div>EIR_Dns_Srv.feature</div><div>EIR_Nrf_Client_Scenarios.feature</div><div>EIR_User_AgentHeader_Nrf.feature</div><div>Prometheus_nrfclient.feature</div><div>Stage_2</div><div>sequential_execution</div><div>behave.ini</div><div>EIR_22_4_x_Patch_PDBI_Import_part2.feature</div><div>EIR_AccessLog.feature</div><div>EIR_Config_Import_Export.feature</div><div>EIR_CSV_Import_part2.feature</div></div> |

Table 4-17 (Cont.) EIR ATS Stages and Groups

| EIR NewFeatures | EIR Regression                                    |
|-----------------|---------------------------------------------------|
|                 | EIR_DefaultIMEINotFound_Response.feature          |
|                 | EIR_Default_Response.feature                      |
|                 | EIR_Export_Configuration_validation.feature       |
|                 | EIR_IMEISV_AccessLog.feature                      |
|                 | EIR_IMEISV_Default_Response.feature               |
|                 | EIR_IMEISV.feature                                |
|                 | EIR_LogLevels.feature                             |
|                 | EIR_MGM_API.feature                               |
|                 | EIR_PDBI_IMEISV_Import_part2.feature              |
|                 | EIR_PDBI_Import_part2.feature                     |
|                 | EIR_PDBI_Synchronous_Scenarios.feature            |
|                 | EIR_Provisioning_Err_part2.feature                |
|                 | EIR_Signalling.feature                            |
|                 | EIR_Subscriber_Prov.feature                       |
|                 | EIR_User_Agent_Header.feature                     |
|                 | EIR_Validation_Additional_Scenarios_part2.feature |

Table 4-17 (Cont.) EIR ATS Stages and Groups

| EIR NewFeatures | EIR Regression               |
|-----------------|------------------------------|
|                 | Prometheus_Scenarios.feature |

Viewing Console Logs for Specific Group

When parallel test execution feature is enabled and ATS runs are triggered, you can view the progress of each stage and group on the corresponding pipeline dashboard.

Figure 4-86 Sample SLF Regression


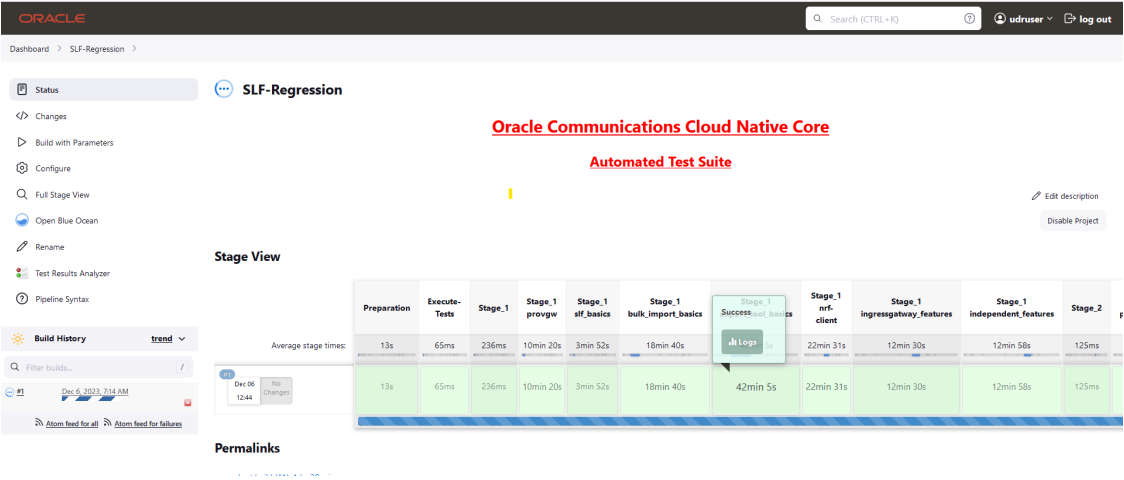


Figure 4-87 Sample Stage Logs



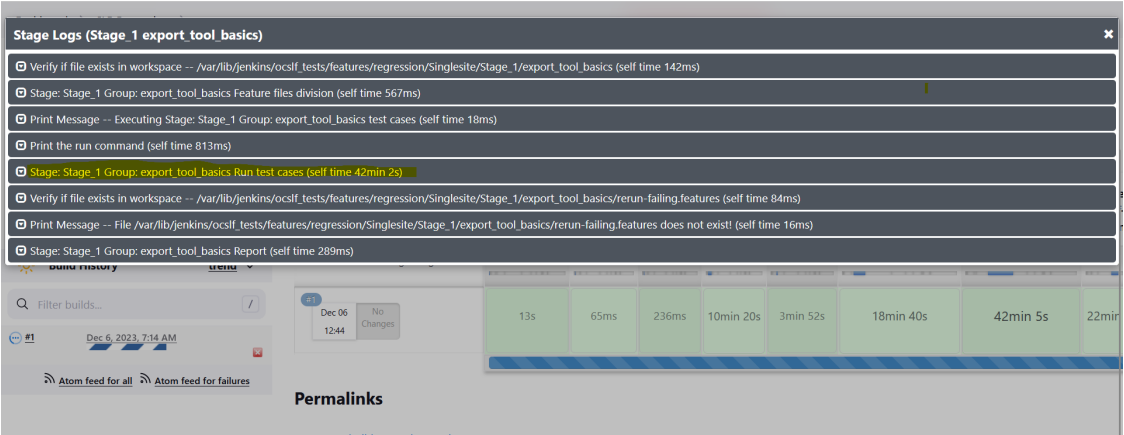

## 4.8.5 Logging into ATS

Before logging into ATS, it is important to know the nodeport of the "-ocats-UDR" service. To get the nodeport detail, run the following command:

```
kubectl get svc -n <slf_namespace>
```

**Example:** `kubectl get svc -n ocudr ocats-udr-ga`

**Figure 4-88 UDR Nodeport**

|               |              |              |           |                               |     |
|---------------|--------------|--------------|-----------|-------------------------------|-----|
| ats-ocats-udr | LoadBalancer | 10.233.22.95 | <pending> | 8080:30156/TCP,5001:31175/TCP | 57s |
|---------------|--------------|--------------|-----------|-------------------------------|-----|

In the previous image, 31788 is the nodeport.

Run the following command to get the worker node IP address:

```
kubectl get nodes -o wide
```

To log in to ATS:

1. In the web browser, type **http://<Worker IP>:nodeport** and press **Enter**.

**Example:** `http://10.75.229.87:30156`


The log in page appears.

2. Enter the username and password. Click **Sign in**. A page with pre-configured pipelines appears.

**Figure 4-89 SLF, EIR, and UDR Pre-configured Pipelines**

| S | W | Name            | Last Success | Last Failure | Last Duration | F   |
|---|---|-----------------|--------------|--------------|---------------|-----|
| ☺ | ☀ | SLF-HealthCheck | N/A          | N/A          | N/A           | ▶ ☆ |
| ☺ | ☀ | SLF-NewFeatures | N/A          | N/A          | N/A           | ▶ ☆ |
| ☺ | ☀ | SLF-Regression  | N/A          | N/A          | N/A           | ▶ ☆ |
| ☺ | ☀ | UDR-HealthCheck | N/A          | N/A          | N/A           | ▶ ☆ |
| ☺ | ☀ | UDR-NewFeatures | N/A          | N/A          | N/A           | ▶ ☆ |
| ☺ | ☀ | UDR-Regression  | N/A          | N/A          | N/A           | ▶ ☆ |

Figure 4-90 EIR ATS Pipeline

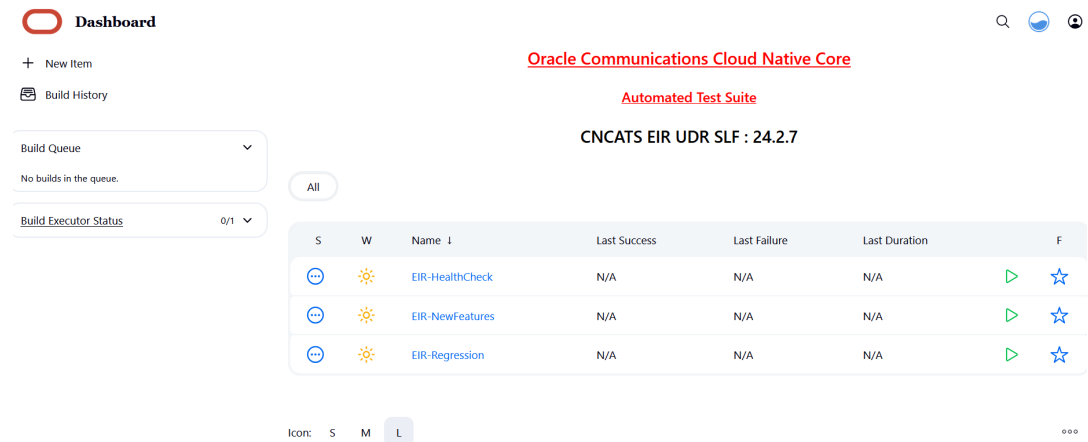**Note**

To modify the default log in password, see [Modifying Login Password](#).

- **SLF-HealthCheck:** This pipeline does a test probe with SUT - trigger Helm test and provide the results in Console Logs.
- **SLF-NewFeatures:** This pipeline has all the test cases delivered as part of SLF ATS - 24.2.7 release.
- **SLF-Performance:** This pipeline provides a means to run 1K TPS of lightweight traffic.
- **SLF-Regression:** This pipeline has all the test cases of previous releases.
- **UDR-HealthCheck:** This pipeline does a test probe with SUT - trigger helm test and provide the results in Console Logs.
- **UDR-NewFeatures:** This pipeline has all the test cases delivered as part of UDR ATS - 24.2.7 release.
- **UDR-Regression:** This pipeline has all the UDR test cases of previous releases.
- **EIR-HealthCheck:** This pipeline does a test probe with SUT - trigger Helm test and provide the results in Console Logs.
- **EIR-NewFeatures:** This pipeline has all the test cases delivered as part of EIR ATS - 24.2.7 release.
- **EIR-Regression:** This pipeline has all the EIR test cases of previous releases.

## 4.8.6 Running SLF Pipelines

This section describes how to run SLF related pipelines. It includes:

- [Running SLF-NewFeatures Pipeline](#)
- [Running SLF Regression Pipeline - Single Site Deployment](#)
- [Running SLF Regression Pipeline - Multiple Site Deployment](#)
- [Running SLF HealthCheck Pipeline](#)
- [Running SLF-Performance Pipeline: Model 2: Single Site Deployment](#)


- [SLF NewFeatures Documentation - Single Site Scenarios](#)
- [SLF Regression Documentation - Single Site Scenarios](#)
- [SLF Regression Documentation - Multiple Site Scenarios](#)

### 4.8.6.1 Running SLF-NewFeatures Pipeline

To run the test cases:

1. Click **SLF-NewFeatures**. The following page appears:

**Figure 4-91 SLF-NewFeatures Configure**

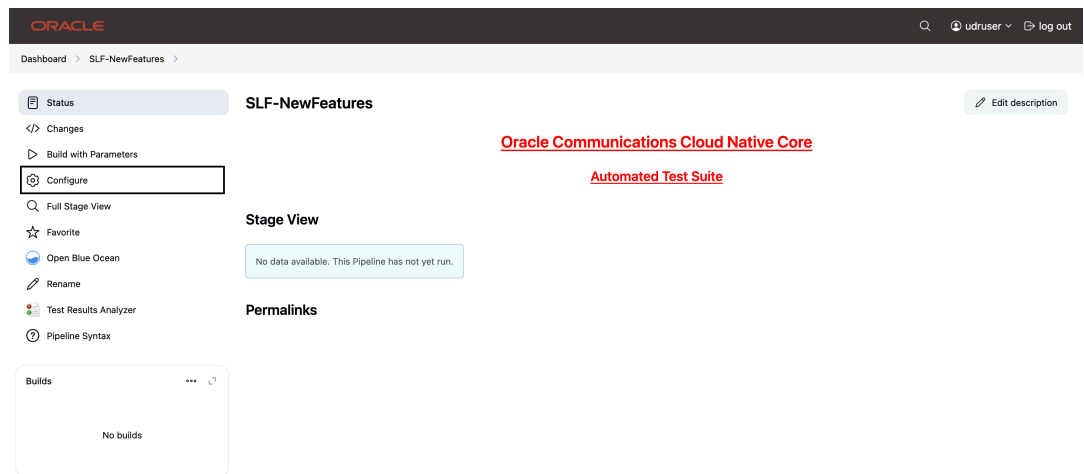

2. Click **Configure** in the left navigation pane. The **General** tab appears. You must wait for the page to load completely.
3. Select the **Discard old Builds**. This option allows you to configure the number of builds you want to retain in the persistent volume.

#### **Note**

It is recommended to configure this option. If there is large number of builds, the [Persistent Volume](#) may be utilized completely.

Figure 4-92 Discard Old Builds

- Click the **Advanced Project Options** tab. Scroll down to reach the **Pipeline** configuration section as follows:

### ! Important

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Figure 4-93 SLF Configuration page

In the pipeline script, do not change any value other than from line number **67 to line 110**. You can change the parameters marked as **"b" - to - "S"** as per user requirement. The parameters details are provided as comments in line number **15 to 59**. The parameters description is as follows:

- a - Selected NF
- b - NameSpace in which UDR is Deployed (Mandatory)

Cloud Native Core Automated Testing Suite Guide  
F99365-21  
Copyright © 2019, 2025, Oracle and/or its affiliates.

October 30, 2025  
Page 214 of 262

- c - NameSpace in which ProvGw is Deployed (Mandatory)
- d - Preferred UDR1 FQDN and PORT of segment 1 in the format FQDN:PORT
- e - UDR2 FQDN and PORT of segment 1 in the format FQDN:PORT
- f - Preferred UDR3 FQDN and PORT of segment 2 in the format FQDN:PORT
- g - UDR4 FQDN and PORT of segment 2 in the format FQDN:PORT
- h - ProvGw FQDN and PORT in the format FQDN:PORT
- i - prometheus\_ip and port of prometheus server in the format FQDN:PORT
- j - re-run count
- k - Name and Port of Kubernetes Host server in the format FQDN:PORT
- l - Mode of Communication (Can be either IP or fqdn)
- m - Helm Name for UDR1
- n - Helm Name for UDR2
- o - Helm Name for UDR3
- p - Helm Name for UDR4
- q - Helm Name for ProvGw
- r - FQDN:PORT format for primary nrf-stub
- s - primary nrf-stub metrics port
- t - nudr-config FQDN:PORT format
- u - prometheus uri apiName and apiVersion
- v - FQDN:PORT format for secondary nrf-stub
- w - secondary nrf-stub metrics port
- x - primary nrf-stub deployment name
- y - secondary nrf-stub deployment name
- z - ProvGw HTTPS port
- A - root certificate authority
- B - Server certificate signed with root CA private key
- C - private key in .pem format
- D - Number of retries to check if pod down is successful
- E - Number of retries to check if pod up is successful
- F - Number of retries when ATS detects tcp connection failures
- G - Time interval in seconds between tcp connection retries
- H - UDR2 FQDN:PORT for multi-site scenarios
- I - UDR2 nudr-config FQDN:PORT for multi-site scenarios
- J - ProvGateway Config service host and port in the format FQDN:PORT
- K - Bulk import helm name
- L - true if CNE VERSION is 1.9 or above or OSO version is 1.10.x or above, else false.
- M - Preferred UDR1 PROV FQDN and PORT of segment 1 in the format FQDN:PORT
- N - UDR2 PROV FQDN and PORT of segment 1 in the format FQDN:PORT

- O - Preferred UDR3 PROV FQDN and PORT of segment 2 in the format FQDN:PORT
- P - UDR4 PROV FQDN and PORT of segment 2 in the format FQDN:PORT
- Q - MultiSite UDR2 PROV FQDN and PORT in the format FQDN:PORT
- R - Helm Release name of SLF export tool (slfexport)
- S - Enable Error Response Logging Validation (true)

#### Note

Setting rerun count, number of retries to check pod status and segment details:

- Rerun count can be set to any desired value by changing option 'j' in the pipeline script.
- Number of retries to check if pod is down can be set by providing option 'D' in the pipeline script.
- Number of retries to check if pod is up can be set by providing option 'E' in the pipeline script.
- If ProvGw is deployed with segment details having UDR fqdn/IP:port, provide option 'I' as "IP". If ProvGw is deployed with segment details having only UDR fqdn/IP, provide option 'I' as "fqdn". If any value other than "IP" and "fqdn" is provided, ATS assumes that the segment details in ProvGw is in "IP" mode.
- Option 'u' shall take value '/<domain name>/prometheus/api/v1 for CNE version 1.9 or above or OSO version is 1.10.x or above. If domain name is not known, then domain name can be found after executing the command from ATS pod:  
`curl http://<prometheus fqdn>:<port>/`

Example:

```
curl http://occne-kube-prom-stack-kube-prometheus.occne-infra/  
<a href="/udr-cne/prometheus">Found</a>
```

5. Click **Save**. The SLF-NewFeatures page appears.
6. Click **Build with Parameters**. The following page displays all the newly added features and total count of the features, counts of scenarios in each feature, name of each feature and scenarios in each feature:

Figure 4-94 SLF Build with Parameters

The screenshot shows the Oracle Communications Cloud Native Core Automated Test Suite - UDR interface. The main heading is "Pipeline SLF-NewFeatures". Below it, a note states "This build requires parameters:". The interface is divided into two main sections: "EXECUTION OPTIONS" and "FEATURES AND TESTCASES".

**EXECUTION OPTIONS**

| TestSuite   | SUT     | SUTSuite | Configuration_Type |
|-------------|---------|----------|--------------------|
| NewFeatures | UDR-SLF | All      | Product_Config     |

Below the table, there are two rows of options:

| Fetch_Log_UpOn_Failure | Log_Type                                           | Log_Level      |
|------------------------|----------------------------------------------------|----------------|
| NO                     | <input checked="" type="checkbox"/> Not Applicable | Not Applicable |

**FEATURES AND TESTCASES**

Features: All

Stages: Stage\_1 Group: Group\_1

- SLF\_Error\_Response\_Enhancement

Stages: Stage\_1 Group: Group\_2

- Provision\_Auditor\_Enhancements

Provision\_Auditor\_Prometheus\_Scenarios

On the left side, there is a navigation pane with options: Status, Changes, Build with Parameters, Configure, Full Stage View, Favorite, Open Blue Ocean, Rename, Test Results Analyzer, and Pipeline Syntax. The "Build History" section is expanded, showing a list of builds with a filter and a "Trend" button.

In the previous image,

- Select the **Configuration\_Type**. For information about this feature, see [Parameterization](#).
- There are two **Select\_Option(s)**, which are:
  - **All**: By default, it selects all the SLF test cases to run. Scroll-down and click **Build** to run all the test cases.
  - **Single/MultipleFeatures**: This option allows you to select the test cases you want to run. After selecting the test cases, scroll-down and click **Build**.

If the **Select\_Option** is selected as 'All', the **TestCases** details are mapped to each feature and if the **Select\_Option** is selected as 'Single/MultipleFeatures', only the TestCases details corresponding to those test cases appear. For more information, see [Support for Test Case Mapping and Count](#).

To view consolidated and detailed stack trace results in case of any failures, click **Test Results Analyzer** in the left navigation pane. The test results analyzer report appears. For more information, see [Test Results Analyzer](#).

A sample consolidated test report, when rerun is set to 0, is as follows:

**Figure 4-95 Consolidated Test Report - Rerun is 0**

```

*****Stage: Stage_1 Group: Group_1 Result*****
Final Result:-
Total-Features RUN 1, PASS 1, FAIL 0

[Pipeline] }
[Pipeline] // catchError
[Pipeline] catchError
[Pipeline] {
[Pipeline] sh (Stage: Stage_1 Group: Group_2 Result)
+ set +x
*****Stage: Stage_1 Group: Group_2 Result*****
Final Result:-
Total-Features RUN 2, PASS 2, FAIL 0

[Pipeline] }
[Pipeline] // catchError
[Pipeline] catchError
[Pipeline] {
[Pipeline] sh (Stage: Stage_2 Group: Group_1 Result)
+ set +x
*****Stage: Stage_2 Group: Group_1 Result*****
Final Result:-
Total-Features RUN 0, PASS 0, FAIL 0

[Pipeline] }
[Pipeline] // catchError
[Pipeline] sh (Overall Result)
+ set +x
*****Overall Result*****

Took 1h21m21s

Final Result:-
Total-Features RUN 3, PASS 3, FAIL 0

```

For more details on consolidated test report, see [Final Summary Report, Build Color and Application Logs](#).

### 4.8.6.2 Running SLF Regression Pipeline - Single Site Deployment


This pre-configured pipeline consists of all the test cases delivered till SLF ATS 24.2.7. However, some test cases are updated as per new implementation of SLF. To run the single site scenarios:

#### ① Note

Model 1 deployment is required for this pipeline. For more information, see [Prerequisites for SLF Pipelines](#).

1. Click **SLF-Regression** and then, click **Configure**.

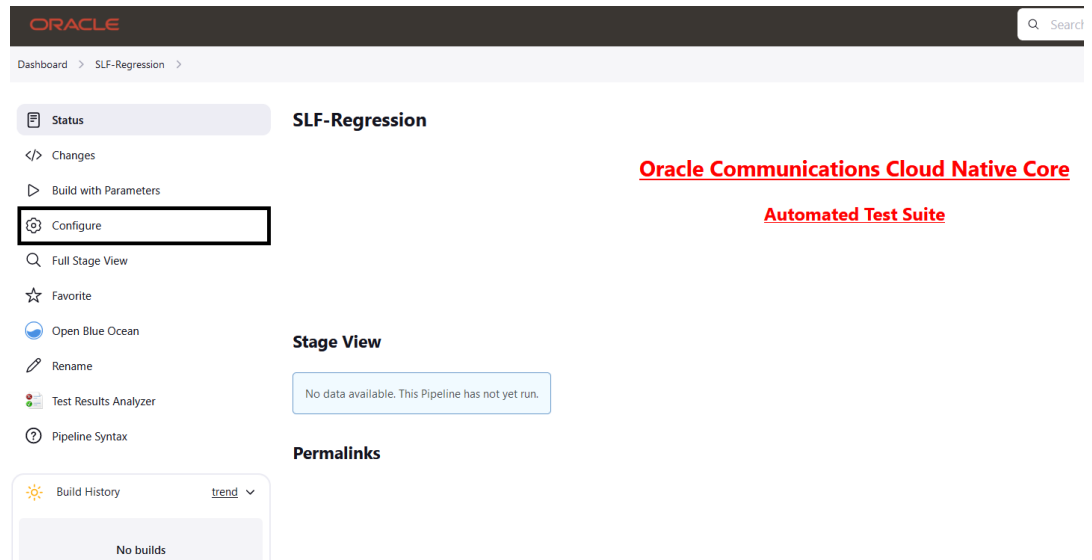

**Figure 4-96 SLF-Regression Pipeline**

2. The **General** tab appears. The user must wait for the page to load completely.
3. Select the **Discard old Builds**. This option allows you to configure the number of builds you want to retain in the persistent volume.

**Note**

It is recommended to configure this option. If there is a large number of builds, the [Persistent Volume](#) may be utilized completely.

4. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:

**Important**

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Do not change any value other than from line number **67 to 110**. You can change the parameters marked as "**b**" - to - "**S**" as per user requirement. The parameters details are provided as comments in line number **15 to 59**. The parameters description is as follows:

- a - Selected NF
- b - NameSpace in which UDR is Deployed (Mandatory)
- c - NameSpace in which ProvGw is Deployed (Mandatory)
- d - Preferred UDR1 FQDN and PORT of segment 1 in the format FQDN:PORT
- e - UDR2 FQDN and PORT of segment 1 in the format FQDN:PORT
- f - Preferred UDR3 FQDN and PORT of segment 2 in the format FQDN:PORT
- g - UDR4 FQDN and PORT of segment 2 in the format FQDN:PORT
- h - ProvGw FQDN and PORT in the format FQDN:PORT

- i - prometheus\_ip and port of prometheus server in the format FQDN:PORT
- j - re-run count
- k - Name and Port of Kubernetes Host server in the format FQDN:PORT
- l - Mode of Communication (Can be either IP or fqdn)
- m - Helm Name for UDR1
- n - Helm Name for UDR2
- o - Helm Name for UDR3
- p - Helm Name for UDR4
- q - Helm Name for ProvGw
- r - FQDN:PORT format for primary nrf-stub
- s - primary nrf-stub metrics port
- t - nudr-config FQDN:PORT format
- u - prometheus uri apiName and apiVersion
- v - FQDN:PORT format for secondary nrf-stub
- w - secondary nrf-stub metrics port
- x - primary nrf-stub deployment name
- y - secondary nrf-stub deployment name
- z - ProvGw HTTPS port
- A - root certificate authority
- B - Server certificate signed with root CA private key
- C - private key in .pem format
- D - Number of retries to check if pod down is successful
- E - Number of retries to check if pod up is successful
- F - Number of retries when ATS detects tcp connection failures
- G - Time interval in seconds between tcp connection retries
- H - UDR2 FQDN:PORT for multi-site scenarios
- I - UDR2 nudr-config FQDN:PORT for multi-site scenarios
- J - ProvGateway Config service host and port in the format FQDN:PORT
- K - Bulk import helm name
- L - true if CNE VERSION is 1.9 or above or OSO version is 1.10.x or above, else false.
- M - Preferred UDR1 PROV FQDN and PORT of segment 1 in the format FQDN:PORT
- N - UDR2 PROV FQDN and PORT of segment 1 in the format FQDN:PORT
- O - Preferred UDR3 PROV FQDN and PORT of segment 2 in the format FQDN:PORT
- P - UDR4 PROV FQDN and PORT of segment 2 in the format FQDN:PORT
- Q - MultiSite UDR2 PROV FQDN and PORT in the format FQDN:PORT
- R - Helm Release name of SLF export tool (slfexport)
- S - Enable Error Response Logging Validation (true)

**Note**

Setting rerun count, number of retries to check pod status and segment details:

- Rerun count can be set to any desired value by changing option 'j' in the pipeline script.
- Number of retries to check if pod is down can be set by providing option 'D' in the pipeline script.
- Number of retries to check if pod is up can be set by providing option 'E' in the pipeline script.
- If ProvGw is deployed with segment details having UDR fqdn/IP:port, provide option 'I' as "IP". If ProvGw is deployed with segment details having only UDR fqdn/IP, provide option 'I' as "fqdn". If any value other than "IP" and "fqdn" is provided, ATS assumes that the segment details in ProvGw is in "IP" mode.
- Option 'u' shall take value '/<domain name>/prometheus/api/v1' for CNE version 1.9 or above or OSO version is 1.10.x or above. If domain name is not known, then domain name can be found after executing the command from ATS pod:

```
curl http://<prometheus fqdn>:<port>/
```

Example:

```
curl http://ocne-kube-prom-stack-kube-prometheus.ocne-infra/  
<a href="/udr-cne-190/prometheus">Found</a>
```

5. Click **Save**. The **Pipeline SLF-Regression** page appears.
6. Click **Build with Parameters**.

**Figure 4-97 Build with Parameters**

**Oracle Communications Cloud Native Core**  
**Automated Test Suite - UDR**

**EXECUTION OPTIONS**

|                              |                            |                             |                                      |
|------------------------------|----------------------------|-----------------------------|--------------------------------------|
| TestSuite<br>Regression      | SUT<br>UDR-SLF             | SUTSuite<br>All             | Configuration_Type<br>Product_Config |
| Fetch_Log_Upon_Failure<br>NO | Log_Type<br>Not Applicable | Log_Level<br>Not Applicable |                                      |

**FEATURES AND TESTCASES**

Features: All

Stages: Stage\_1 Group: bulk\_import\_basics  
• SLF\_BulkImport

Stages: Stage\_1 Group: export\_tool\_basics  
• SLF\_Subscriber\_Export\_Tool

Stages: Stage\_1 Group: independent\_features  
• SLF\_Network\_Policy\_Validation

Stages: Stage\_1 Group: ingressgateway\_features  
• SLF\_Ingressgateway\_Header

Stages: Stage\_1 Group: SLF\_Sbi\_Correlation\_Header  
• SLF\_Sbi\_Correlation\_Header

Stages: Stage\_1 Group: SLF\_Sbi\_Vis\_Monitor  
• SLF\_Sbi\_Vis\_Monitor

**Build** Cancel

7. Select the Configuration\_Type. For more information about this feature, see [Parameterization](#).

8. Select **SUTSuite** as 'All'. This lists all regression features and displays the total count of the features, counts of scenarios in each feature, name of each feature, and scenarios in each feature.
9. Click **Build**.  
For more details on consolidated test report, see [Final Summary Report, Build Color and Application Logs](#).

A sample consolidated test report, when rerun is set to 0, is as follows:

**Figure 4-98 Consolidated Test Report Rerun**

```
Dashboard > SLF-Regression > #2

[Pipeline] }
[Pipeline] // catchError
[Pipeline] catchError
[Pipeline] {
[Pipeline] sh (Stage: Stage_2 Group: provgw_config Result)
+ set +x
*****Stage: Stage_2 Group: provgw_config Result*****
Final Result:-
Total-Features RUN 1, PASS 1, FAIL 0

[Pipeline] }
[Pipeline] // catchError
[Pipeline] catchError
[Pipeline] {
[Pipeline] sh (Stage: Stage_2 Group: slf_config Result)
+ set +x
*****Stage: Stage_2 Group: slf_config Result*****
Final Result:-
Total-Features RUN 3, PASS 3, FAIL 0

[Pipeline] }
[Pipeline] // catchError
[Pipeline] catchError
[Pipeline] {
[Pipeline] sh (Stage: Stage_3 Group: sequential_execution Result)
+ set +x
*****Stage: Stage_3 Group: sequential_execution Result*****
Final Result:-
Total-Features RUN 16, PASS 16, FAIL 0

[Pipeline] }
[Pipeline] // catchError
[Pipeline] sh (Overall Result)
+ set +x
*****Overall Result*****

Took 3h33m13s

Final Result:-
Total-Features RUN 41, PASS 41, FAIL 0
```

### 4.8.6.3 Running SLF Regression Pipeline - Multiple Site Deployment

This pre-configured pipeline consists of all the test cases delivered till SLF ATS 24.2.7. However, some test cases are updated as per new implementation of SLF. To run the multiple site scenarios:

#### **Note**

Model 3 deployment is required for this pipeline. For more information, see [Prerequisites for SLF Pipelines](#).

1. Click **SLF-Regression** and then, click **Configure**.
2. The **General** tab appears. The user must wait for the page to load completely.
3. Select the **Discard old Builds**. This option allows you to configure the number of builds you want to retain in the persistent volume.

**Note**

It is recommended to configure this option. If there are large number of builds, the [Persistent Volume](#) may be utilized completely.

4. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:

**Important**

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Do not change any value other than from **line number 16 to line 58**. You can change the parameters marked as "b" - to - "R" as per user requirement. The parameters details are provided as comments in line number 14 to 56. The parameters description is as follows:

- a - Selected NF
- b - NameSpace in which UDR is Deployed (Mandatory)
- c - NameSpace in which ProvGw is Deployed (Mandatory)
- d - Preferred UDR1 FQDN and PORT of segment 1 in the format FQDN:PORT
- e - UDR2 FQDN and PORT of segment 1 in the format FQDN:PORT
- f - Preferred UDR3 FQDN and PORT of segment 2 in the format FQDN:PORT
- g - UDR4 FQDN and PORT of segment 2 in the format FQDN:PORT
- h - ProvGw FQDN and PORT in the format FQDN:PORT
- i - prometheus\_ip and port of prometheus server in the format FQDN:PORT
- j - re-run count
- k - Name and Port of Kubernetes Host server in the format FQDN:PORT
- l - Mode of Communication (Can be either IP or fqdn)
- m - Helm Name for UDR1
- n - Helm Name for UDR2
- o - Helm Name for UDR3
- p - Helm Name for UDR4
- q - Helm Name for ProvGw
- r - FQDN:PORT format for primary nrf-stub
- s - primary nrf-stub metrics port
- t - nudr-config FQDN:PORT format
- u - prometheus uri apiName and apiVersion
- v - FQDN:PORT format for secondary nrf-stub
- w - secondary nrf-stub metrics port
- x - primary nrf-stub deployment name
- y - secondary nrf-stub deployment name

- z - ProvGw HTTPS port
- A - root certificate authority
- B - Server certificate signed with root CA private key
- C - private key in .pem format
- D - Number of retries to check if pod down is successful
- E - Number of retries to check if pod up is successful
- F - Number of retries when ATS detects tcp connection failures
- G - Time interval in seconds between tcp connection retries
- H - UDR2 FQDN:PORT for multi-site scenarios
- I - UDR2 nudr-config FQDN:PORT for multi-site scenarios
- J - ProvGateway Config service host and port in the format FQDN:PORT
- K - Bulk import helm name
- L - true if CNE VERSION is 1.9 or above or OSO version is 1.10.x or above, else false.
- M - Preferred UDR1 PROV FQDN and PORT of segment 1 in the format FQDN:PORT
- N - UDR2 PROV FQDN and PORT of segment 1 in the format FQDN:PORT
- O - Preferred UDR3 PROV FQDN and PORT of segment 2 in the format FQDN:PORT
- P - UDR4 PROV FQDN and PORT of segment 2 in the format FQDN:PORT
- Q - MultiSite UDR2 PROV FQDN and PORT in the format FQDN:PORT
- R - Helm Release name of SLF export tool (slfexport)
- S - Enable Error Response Logging Validation (true)

**Note**

Setting rerun count, number of retries to check pod status, and segment details:

- Rerun count can be set to any desired value by changing option 'j' in the pipeline script.
- Number of retries to check if pod is down can be set by providing option 'D' in the pipeline script.
- Number of retries to check if pod is up can be set by providing option 'E' in the pipeline script.
- If ProvGw is deployed with segment details having UDR fqdn/IP:port, provide option 'l' as "IP". If ProvGw is deployed with segment details having only UDR fqdn/IP, provide option 'l' as "fqdn". If any value other than "IP" and "fqdn" is provided, ATS assumes that the segment details in ProvGw is in "IP" mode.
- Option 'u' shall take value '/<domain name>/prometheus/api/v1' for CNE version 1.9 or above or OSO version is 1.10.x or above. If domain name is not known, then domain name can be found after executing the command from ATS pod:

```
curl http://<prometheus fqdn>:<port>/
```

```
curl http://ocne-kube-prom-stack-kube-prometheus.ocne-infra/
<a href="/udr-cne-190/prometheus">Found</a>
```

5. Click **Save**. The **Pipeline SLF-Regression** page appears.
6. Click **Build with Parameters**. Select the **Configuration\_Type**.

**Note**

For information about the Configuration\_Type, see [Parameterization](#).

7. Select **SUTSuite** as 'Multi\_Site'. This lists all the regression features and displays the total count of the features, counts of scenarios in each feature, name of each feature, and scenarios in each feature.
8. Click **Build**.  
A sample consolidated test report, when rerun is set to 0 is as follows:

**Figure 4-99 SLF- Regression to run Multiple Site Scenarios - Consolidated Test Report - Rerun is 0**

```

3 features passed, 0 failed, 0 skipped
21 scenarios passed, 0 failed, 0 skipped
794 steps passed, 0 failed, 0 skipped, 0 undefined
Took 17m58.722s
[Pipeline] sh
+ cd /var/lib/jenkins/ocslf_tests
++ cat /var/lib/jenkins/ocslf_tests/envirion.sh
++ grep RERUN
++ cut -d= -f2
++ cut '-d;' -f1
+ rerun=0
+ [[ 0 -ne 0 ]]
+ sh re-run.sh 0
1
Scenario passed

```

For more details on consolidated test report, see [Final Summary Report, Build Color and Application Logs](#).

#### 4.8.6.4 Running SLF HealthCheck Pipeline

To run health check on SLF or Provisioning Gateway:

1. Navigate to **SLF-HealthCheck** pipeline and click **Configure**.

**Figure 4-100 UDR - SLF-HealthCheck Pipeline**

The screenshot shows the Oracle Cloud Native Core Automated Test Suite (ATS) interface. The top navigation bar includes the Oracle logo and a search bar. Below the navigation bar, the breadcrumb trail indicates the current location: Dashboard > SLF-HealthCheck >. The main content area is divided into a sidebar on the left and a main panel on the right. The sidebar contains a list of actions: Status, Changes, Build Now, Configure (highlighted with a red box), Full Stage View, Favorite, Open Blue Ocean, Rename, Test Results Analyzer, and Pipeline Syntax. The main panel displays the 'SLF-HealthCheck' pipeline status as 'Success' with a green checkmark. Below the status, the 'Stage View' is shown, which includes a table of stage times for the 'Helm-Test-Init' and 'Validate-Helm-Test' stages. The table shows that the 'Helm-Test-Init' stage took 2min 51s and the 'Validate-Helm-Test' stage took 215ms. The 'Configure' button is highlighted with a red box.

2. The **General** tab appears. The user must wait for the page to load completely.
3. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:




**! Important**

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Do not change any value other than **line numbers 16 and 17**. You can change the parameters marked as "**a**" "**b**" and "**c**" as per user requirement. The parameters details are provided as comments in **line number 7 and 9**. The parameters description is as follows:

- a - helm releases [Provide Release Name with Comma Separated if more than 1 ]
- b - namespace of SUT.
- c - helm command alias that is being used on the CNE (helm or helm2 or helm3)

**Figure 4-101 SLF-HealthCheck Pipeline configuration**

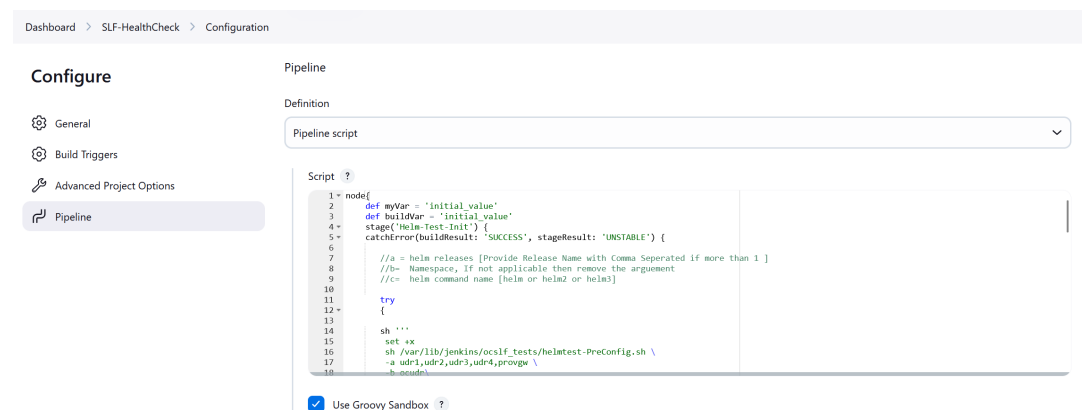

4. Click **Save**. The **Pipeline SLF-HealthCheck** page appears.
5. Click **Build Now**. This triggers health check for SUT.

**Figure 4-102 SLF-HealthCheck Pipeline Build**

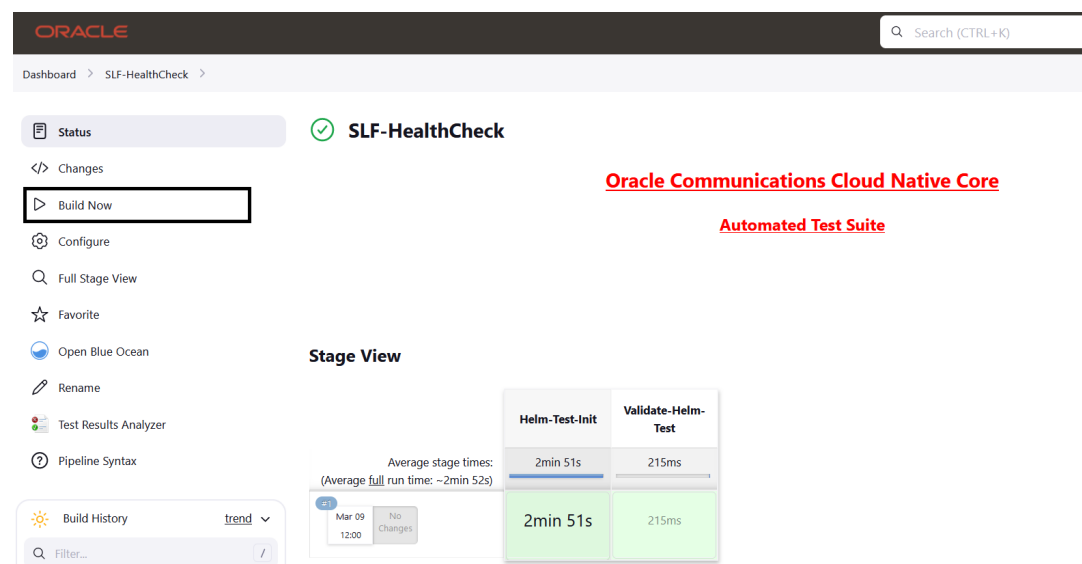


**Figure 4-103 Sample Output - SLF Health Check**

```

Dashboard > SLF-HealthCheck > #1

Your release is named udr4 , Release Revision: 1.
To learn more about the release, try:

$ helm status udr4
$ helm get udr4
[0m
2024-03-09 06:32:42,735[32m INFO LOG.HELM-TEST:176 [0m] [32mhelm test provgw -n udr-arjun[0m
2024-03-09 06:33:10,827[32m INFO LOG.HELM-TEST:191 [0m] [32m
NAME: provgw
LAST DEPLOYED: Fri Mar 8 12:34:26 2024
NAMESPACE: udr-arjun
STATUS: deployed
REVISION: 1
TEST SUITE: provgw-test
Last Started: Sat Mar 9 06:32:43 2024
Last Completed: Sat Mar 9 06:33:10 2024
Phase: Succeeded
NOTES:
# Copyright 2019 (C), Oracle and/or its affiliates. All rights reserved.

Thank you for installing provgw.

Your release is named provgw , Release Revision: 1.
To learn more about the release, try:

$ helm status provgw
$ helm get provgw
[0m

[Pipeline] }
[Pipeline] // catchError
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS

```


### 4.8.6.5 Running SLF-Performance Pipeline: Model 2: Single Site Deployment

To run light weight performance scenarios:

#### **Note**

Model 2 deployment is required for this pipeline. For more information, see [Prerequisites for SLF Pipelines](#).

1. Navigate to the **SLF-Performance** pipeline and click **Configure**.

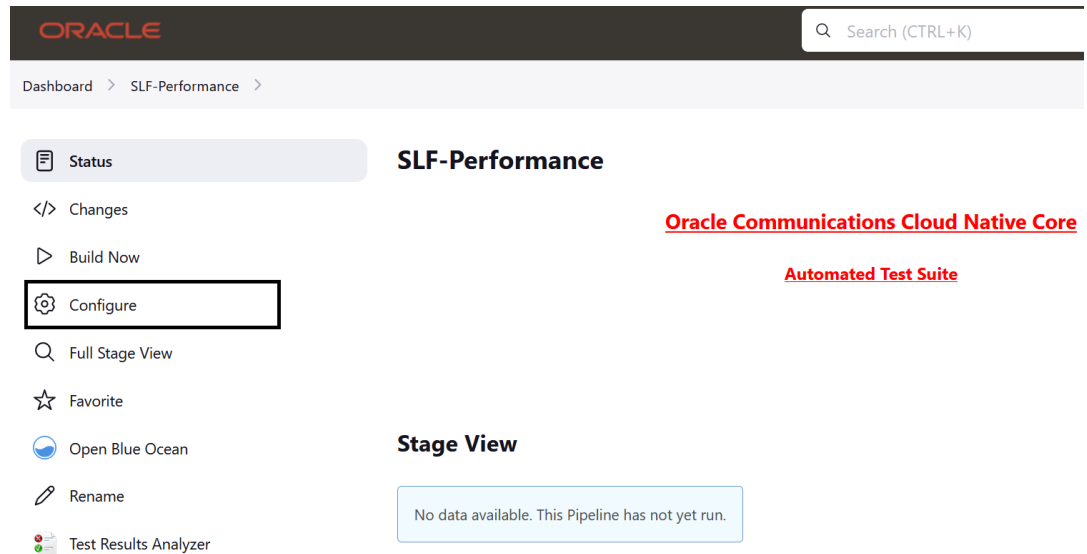**Figure 4-104 SLF Single Site Performance Model 2**

2. The **General** tab appears. The user must wait for the page to load completely.
3. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:


### ! Important

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Do not change any value other than line number **22** and line number **31**. You can change the parameters marked as "b" and "k" as per user requirement. The parameters details are provided as comments in line number 7 and 21. The parameters description is as follows:

- a - Selected NF (should always be SLF)
- b - UDR ingressgateway provisioning FQDN and port for performance testing (ocudr-ingressgateway-prov.ocudr:80)
- c - UDR ingressgateway signalling FQDN and port for performance testing (ocudr-ingressgateway-sig.ocudr:80)
- d - Prometheus Server FQDN and port (occne-prometheus-server.occne-infra:80)
- e - Prometheus URI (/prometheus/api/v1)
- f - Namespace in which UDR is deployed for performance testing (ocudr)
- g - Helm Name of UDR (ocudr)
- h - Kubernetes host FQDN (kubernetes.default)
- i - Kubernetes host port number (443)
- j - Duration for which performance needs to be tested (in seconds) (900)
- k - Whether scenario with ramping up of TPS from 1K to 2K and back, needs to be run (false)

Figure 4-105 SLF-Performance Pipeline Configuration

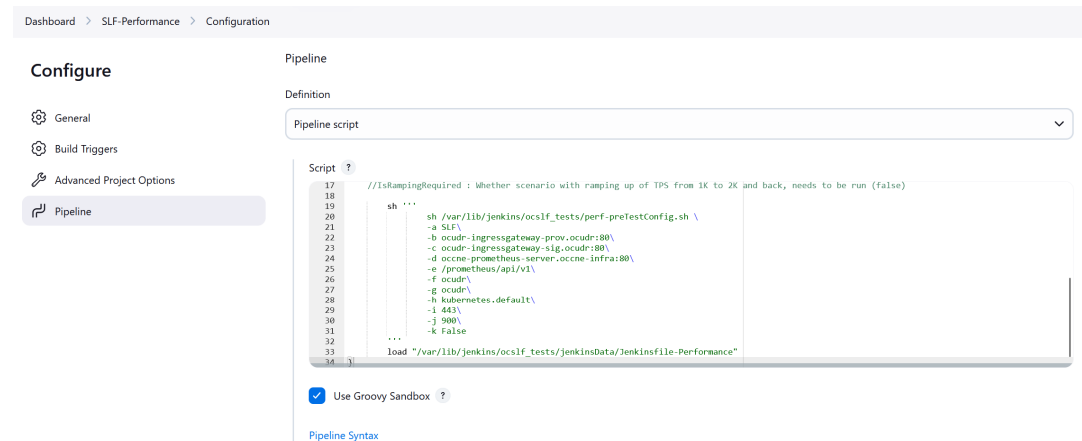

4. Click **Save**. The **Pipeline SLF-Performance** page appears.
5. Click **Build Now**. This triggers lightweight traffic on UDR-SLF.

Figure 4-106 Sample Output - SLF Performance

```


1 feature passed, 0 failed, 0 skipped
1 scenario passed, 0 failed, 1 skipped
30 steps passed, 0 failed, 29 skipped, 0 undefined
Took 21m47.747s

```

## 4.8.6.6 SLF NewFeatures Documentation - Single Site Scenarios

To view the documentation of SLF-NewFeatures, click the **Documentation** link in the left navigation pane (present inside the build), as follows:

Figure 4-107 SLF-New Features Documentation

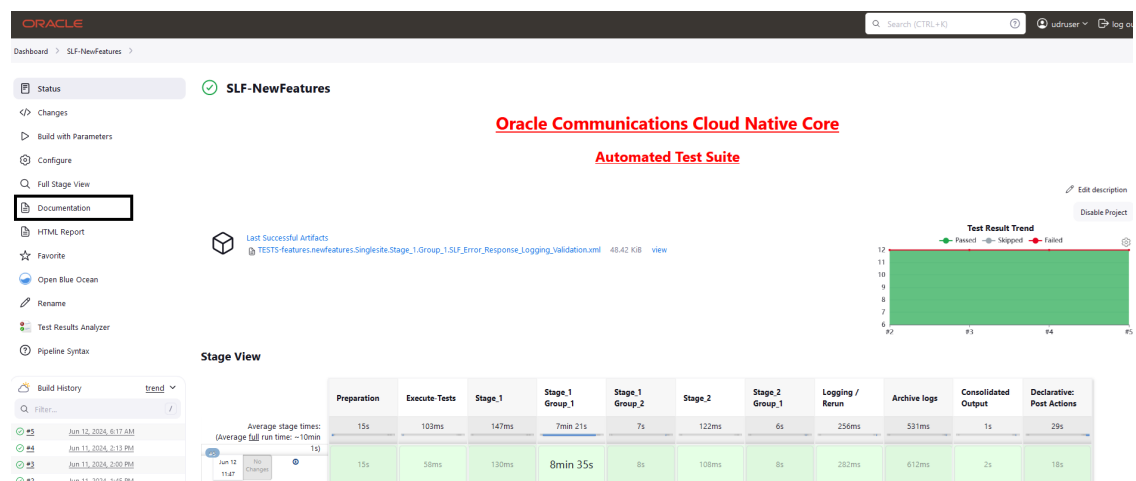

The page lists all the features. Click any feature to view description of that test case.

[Back to SLF-NewFeatures](#) pages

# My Project

## Related Pages

Here is a list of all related documentation pages:

[SLF\\_Error\\_Response\\_Logging\\_Validation](#)

The SLF new features list along with its description is as follows:

**Table 4-18 SLF New Features**

| Feature                                       | Description                                                                                               |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| SLF_Error_Response_Logging_Validation.feature | Validate the error response details on the pod logs when the additionalErrorLogging parameter is enabled. |
| ProvGw_TLS_V12_Verification.feature           | Validate backward compatibility of TLS with TLSv1.2 request to Provisioning Gateway.                      |


**Note**

The Documentation option appears only if you have run the SLF-NewFeatures pipeline test cases atleast once.

Based on the functionalities covered under Documentation, the **Build Requires Parameters** page displays test cases. To navigate back to the Pipeline SLF-NewFeatures page, click **Back to SLF-NewFeatures** link available on top left corner of the page.

### 4.8.6.7 SLF Regression Documentation - Single Site Scenarios


Click **Documentation** in the left navigation pane of the SLF-Regression pipeline to view all the test cases.

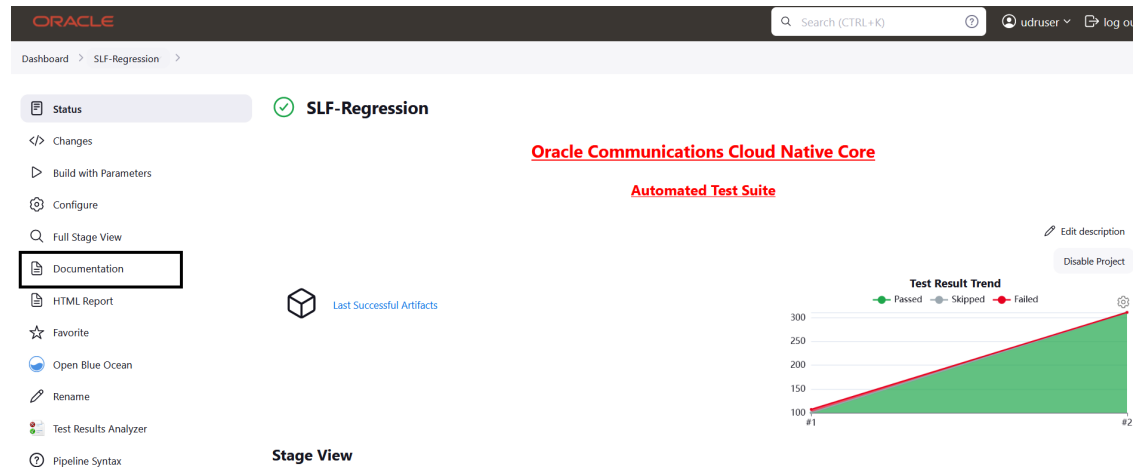**Figure 4-108 SLF-Regression Documentation**

Click any feature to see the description of that test case.

#### 4.8.6.8 SLF Regression Documentation - Multiple Site Scenarios

Click **Documentation** in the left navigation pane of the SLF-Regression pipeline to view all the test cases provided.

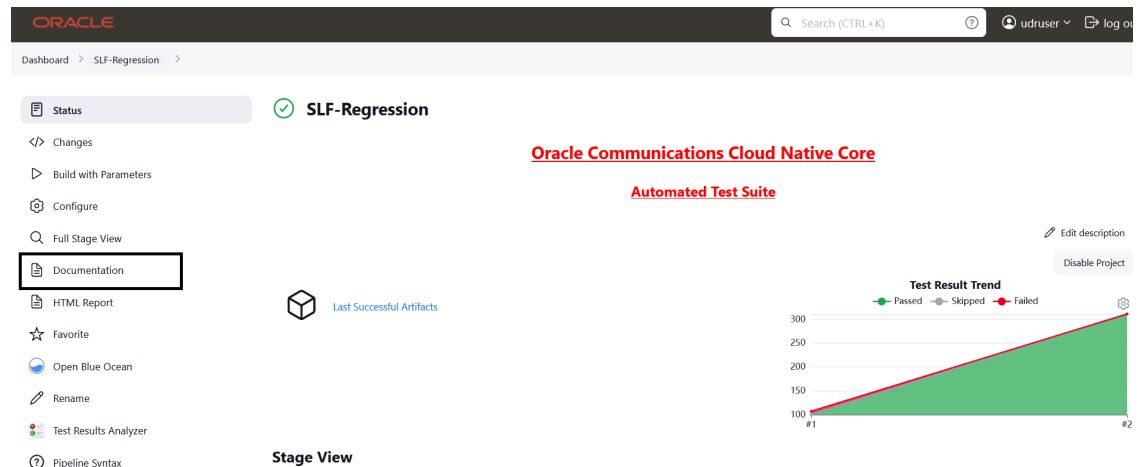**Figure 4-109 SLF-Regression Documentation**

Click any feature to view its details.

#### 4.8.7 Running UDR Pipelines

This section describes how to run UDR related pipelines. It includes:

- [Running UDR NewFeatures Pipeline](#)
- [Running UDR Regression Pipeline](#)

- [Running UDR HealthCheck Pipeline](#)
- [UDR NewFeatures Documentation](#)
- [UDR Regression Documentation](#)


### 4.8.7.1 Running UDR NewFeatures Pipeline

To run the UDR-NewFeatures (Model 1) pipeline test cases:

#### Running UDR-NewFeatures (Model 1) pipeline test cases

1. Click **UDR-NewFeatures**. Click **Configure** in the left navigation pane. The **General** tab appears. The user must wait for the page to load completely.

**Figure 4-110 UDR NewFeatures Pipeline**

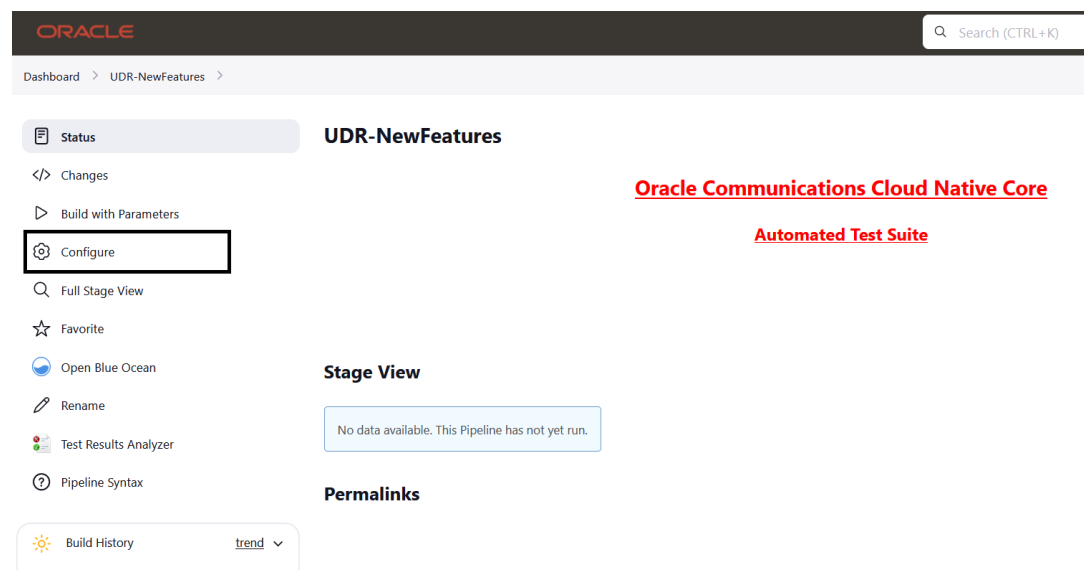

2. Once the page loads completely, select the **Discard old Builds**. This option allows you to configure the number of builds you want to retain in the persistent volume.

#### Note

It is recommended to configure this option. If there is large number of build, the [Persistent Volume](#) may be utilized completely.

3. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration as follows:

#### Important

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

You should not change any other value apart from **line number 65 to 107**. It means you can change the parameters marked as **"b"** - to - **"R"** as per user requirement. The

parameters details are provided as comments in **line number 14 to 57**. The parameters description is as follows:

- a - Name of the NF to be tested in capital (UDR).
- b - Namespace in which the udr is deployed.
- c - Name of signalling UDR1\_ingressgateway\_service.namespace and port (ocudr-ingressgateway-sig.ocudr:80).
- d - Helm release name of UDR (ocudr)
- e - FQDN and Port UDR's nudr-config in the format fqdn:port (ocudr-nudr-config.ocudr:5001)
- f - Name\_of\_Prometheus\_service.namespace and port(occne-prometheus-server.occne-infra:80).
- g - If this option is not provided, Prometheus URI shall be /api/v1 (Default: /prometheus/api/v1) (if CNE 1.9+ /<cne-cluster-name>/prometheus/api/v1)
- h - Number of times the re-run of failed case is allowed (default as 2).
- i - Name of Kubernetes Host server and port (kubernetes.default:443)
- j - diameter endpoint fqdn and port in the form fqdn:port (ocudr-nudr-diam-gateway.ocudr:3868)
- k - fqdn or IP of http2-server in the format <ip/fqdn> (fqdn) (notify-stub-service.ocudr:80)
- l - fqdn or IP for primary nrf stub and port in the format <ip/fqdn>:<port> (nrf-stub-server.ocudr:8080)
- m - fqdn or IP for secondary nrf stub and port in the format <ip/fqdn>:<port> (nrf-stub-server2.ocudr:8080)
- n - primary stub deployment name (nrfstub-ocstub-py)
- o - secondary stub deployment name (nrfstub2-ocstub-py)
- p - HTTPS port for UDR (443)
- q - root certificate authority (CA) (caroot.cer)
- r - Server certificate signed with root CA private key (apigatewayrsa.cer)
- s - private key to .pem format (rsa\_private\_key\_pkcs1.pem)
- t - fqdn and port for 2nd diameter tool endpoint
- u - MYSQL SERVICE ENDPOINT
- v - NOTIFY STUB deployment name
- w - Name of signaling in the format fqdn:port (ocudr-s2-ingressgateway-sig.ocudr-s2:80)
- x - fqdn and port for UDR2 nudr-config (ocudr2-nudr-config.ocudr:5001)
- y - fqdn and port for UDR2 DIAMETER\_ENDPOINT (fqdn:port) (ocudr-s2-nudr-diam-gateway.ocudr-s2:3868)
- z - FQDN and port for SCP stub (scp-stub-service:8080)
- A - Deployment name for SCP stub (scpstub-notify-ocstub-py)
- B - Bulk import helm name
- C - ProvGw namespace (ocudr)



- D - ProvGw endpoint in format fqdn:port (provgw-prov-ingressgateway.ocudr:80)
- E - ProvGw endpoint https port(443)
- F - ProvGw helm name
- G - ProvGw config host in the format fqdn:port(provgw-provgw-config.ocudr:5001)
- H - true if OCCNE is 1.9.x and above, else false (true)
- I - fqdn and port for fourg stub in the form (fqdn:port)
- J - fqdn and port for 1st diameter tool endpoint
- K - fqdn and port for notify stub for TLS scenarios (tlsnotify-stub-service.ocudr:8443)
- L - Service name of UDR1 provisioning ingressgateway in the format FQDN:PORT(ocudr-ingressgateway-prov.ocudr:80)
- M - Service name of site2 UDR provisioning ingressgateway in the format FQDN:PORT(ocudr2-ingressgateway-prov.ocudr-s2:80)
- N - Diameter Stub Tool1 Deploy Name (diamtoola-diam-stub)
- O - Diameter Stub Tool2 Deploy Name (diamtoolb-diam-stub)
- P - Migration tool Helm release name (migration-tool)
- Q - Deployment name of the TLS notify stub (tlsnotifystub-ocstub-py)
- R - Enable error response logging validation (true)

**Figure 4-111 UDR NewFeatures Pipeline Configuration**

Dashboard > UDR-NewFeatures > Configuration

**Configure**

- General
- Build Triggers
- Advanced Project Options
- Pipeline**

**Pipeline**

Definition

Pipeline script

Script ?

```

1 = node('built-in'){
2   //a = NF
3   //e = UDR_CONFIG_ENDPOINT
4   //i = KUBERNETES_HOST_PORT
5   //m = NRF_STUB2_DATA
6   //q = CAPTIVE
7   //u = DR_SVC_ENDPOINT
8   //v = UDR2_DIAM_ENDPOINT
9   //c = PROVGW_NAMESPACE
10  //g = PROVGW_CONFIG_HOST_PORT
11  //k = TLS_STUB_FQDN_PORT
12  //o = DIAM_STUB2_DEPLOY_NAME
13  //Description of Variables:
14  //SELECTED_NF : UDR
15  //UDR_NAMESPACE : UDR Namespace
16  //UDR1_SIG_FQDN_PORT : Name of signalling UDR ingressgateway service.namespace and port in the format FQDN:PORT(ocudr-ingressgateway-sig.ocudr:80)
17  //UDR1_Helm_Name : Helm Name for UDR1 (ocudr)
18  //UDR2_CONFIG_ENDPOINT : FQDN and port for UDR2 config in the format FQDN:PORT(ocudr2-ingressgateway-prov.ocudr-s2:80)
19
20  b = UDR_NAMESPACE
21  f = PROVGW_SVC_FQDN_PORT
22  j = DIAM_ENDPOINT
23  n = NRF_STUB_DEPLOY_NAME
24  r = CERTFILE
25  v = HTTP_STUB_DEPLOY_NAME
26  w = UDR2_SIG_FQDN_PORT
27  z = SCP_STUB_DEPLOY_NAME
28  A = SCP_STUB_DEPLOY_NAME
29  D = Provgw_FQDN_PORT
30  H = CNF_VERSION_19
31  L = UDR1_PROV_FQDN_PORT
32  P = MIGRATION_TOOL_RELEASE_NAME
33
34  c = UDR1_SIG_FQDN_PORT
35  g = PROVGW_SVC_URI
36  k = HTTP_STUB_FQDN_PORT
37  o = NRF_STUB2_DEPLOY_NAME
38  s = KEYFILE
39  w = UDR2_SIG_FQDN_PORT
40  A = SCP_STUB_DEPLOY_NAME
41  D = Provgw_HTTPS_Port
42  I = FOURG_SIG_STUB_ENDPOINT
43  M = UDR2_PROV_FQDN_PORT
44  Q = TLS_STUB_DEPLOY_NAME
45
46  d = UDR1_Helm_Name
47  h = REFIN_COUNT
48  l = NRF_STUB_DATA
49  p = UDR1_HTTPS_PORT
50  t = DIAM_TOOL2_ENDPOINT
51  x = UDR2_NDR_CONFIG_ENDPOINT
52  B = BULK_HELM_NAME
53  F = Provgw_Helm_Name
54  Z = DIAM_TOOL1_ENDPOINT
55  N = DIAM_STUB1_DEPLOY_NAME
56  R = ERROR_RESPONSE_LOGGING

```

☒ Use Groovy Sandbox ?

[Pipeline Syntax](#)

4. Click **Save** after making necessary changes. The **Pipeline UDR-NewFeatures** page appears.
5. Click **Build with Parameters**. The page lists all the newly added features and displays the total number of features and the scenarios in each feature, name of each feature, and scenarios in each feature.

Figure 4-112 UDR NewFeatures Pipeline Build with Parameter


- Select the Configuration\_Type. For more information, see [Parameterization](#).
  - Choose the **Select\_Option(s)**, which are:
    - **All:** By default, it selects all the UDR test cases to run. Scroll-down and click **Build** to run all the test cases.
    - **Single/MultipleFeatures:** This option allows you to select any number of test cases you want to run from the list of total test cases available for execution.
6. After selecting the test cases, scroll-down and click **Build** to run the selected UDR test cases.

Sample output with expected failures are as follows:

```
Stage:Stage_2 Group:no_igw_dr_metrics
UDR_IGW_LCI_Header.feature:81  UDR_LCI_03_UserAgent_Err
UDR_PCF_User_Agent_Header_New.feature:74  UDR_USER_AGENT_HEADER_02
UDR_PCF_User_Agent_Header_New.feature:140  UDR_USER_AGENT_HEADER_03
```

### Running UDR-NewFeatures (Model 2) pipeline test cases

1. Click **UDR-NewFeatures**. Click **Configure** in the left navigation pane. The **General** tab appears. The user must wait for the page to load completely.

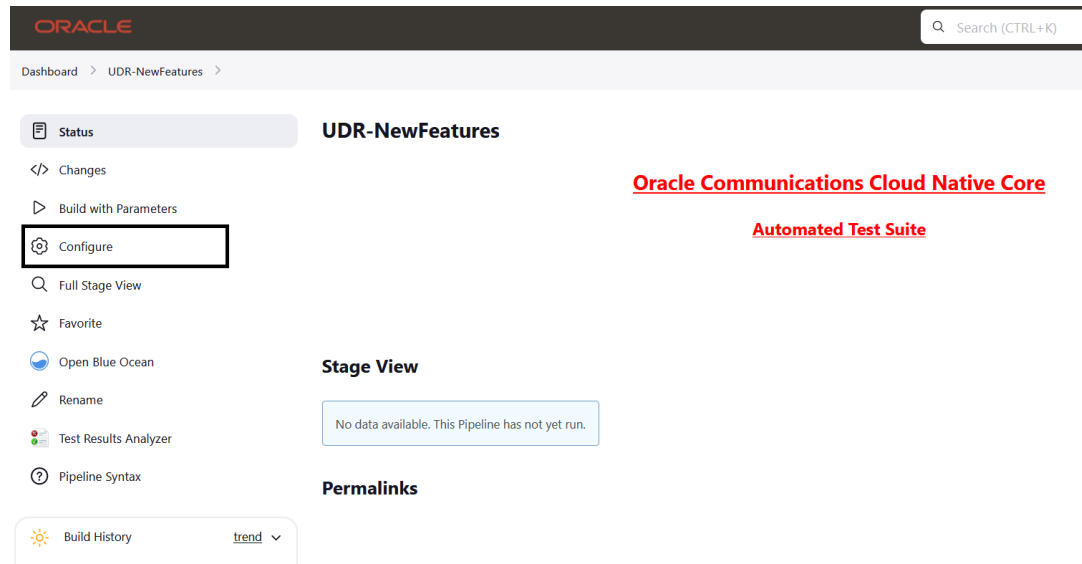**Figure 4-113 UDR NewFeatures Pipeline**

2. Once the page loads completely, select the **Discard old Builds**. This option allows you to configure the number of builds you want to retain in the persistent volume.

#### Note

It is recommended to configure this option. If there is large number of build, the [Persistent Volume](#) may be utilized completely.

3. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration as follows:

#### Important

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.


You should not change any other value apart from **line number 65 to 107**. It means you can change the parameters marked as "**b**" - to - "**R**" as per user requirement. The parameters details are provided as comments in **line number 14 to 57**. The parameters description is as follows:

- a - Name of the NF to be tested in capital (UDR).
- b - Namespace in which the udr is deployed.
- c - Name of signalling UDR1\_ingressgateway\_service.namespace and port (ocudr-ingressgateway-sig.ocudr:80).
- d - Helm release name of UDR (ocudr)
- e - FQDN and Port UDR's nudr-config in the format fqdn:port (ocudr-nudr-config.ocudr:5001)
- f - Name\_of\_Prometheus\_service.namespace and port(occne-prometheus-server.occne-infra:80).

- g - If this option is not provided, Prometheus URI shall be /api/v1 (Default: /prometheus/api/v1) (if CNE 1.9+ /<cne-cluster-name>/prometheus/api/v1)
- h - Number of times the re-run of failed case is allowed (default as 2).
- i - Name of Kubernetes Host server and port (kubernetes.default:443)
- j - diameter endpoint fqdn and port in the form fqdn:port (ocudr-nudr-diam-gateway.ocudr:3868)
- k - fqdn or IP of http2-server in the format <ip/fqdn> (fqdn) (notify-stub-service.ocudr:80)
- l - fqdn or IP for primary nrf stub and port in the format <ip/fqdn>:<port> (nrf-stub-server.ocudr:8080)
- m - fqdn or IP for secondary nrf stub and port in the format <ip/fqdn>:<port> (nrf-stub-server2.ocudr:8080)
- n - primary stub deployment name (nrfstub-ocstub-py)
- o - secondary stub deployment name (nrfstub2-ocstub-py)
- p - HTTPS port for UDR (443)
- q - root certificate authority (CA) (caroot.cer)
- r - Server certificate signed with root CA private key (apigatewayrsa.cer)
- s - private key to .pem format (rsa\_private\_key\_pkcs1.pem)
- t - fqdn and port for 2nd diameter tool endpoint
- u - MYSQL SERVICE ENDPOINT
- v - NOTIFY STUB deployment name
- w - Name of signaling in the format fqdn:port (ocudr-s2-ingressgateway-sig.ocudr-s2:80)
- x - fqdn and port for UDR2 nudr-config (ocudr2-nudr-config.ocudr:5001)
- y - fqdn and port for UDR2 DIAMETER\_ENDPOINT (fqdn:port) (ocudr-s2-nudr-diam-gateway.ocudr-s2:3868)
- z - FQDN and port for SCP stub (scp-stub-service:8080)
- A - Deployment name for SCP stub (scpstub-notify-ocstub-py)
- B - Bulk import helm name
- C - ProvGw namespace (ocudr)
- D - ProvGw endpoint in format fqdn:port (provgw-prov-ingressgateway.ocudr:80)
- E - ProvGw endpoint https port(443)
- F - ProvGw helm name
- G - ProvGw config host in the format fqdn:port(provgw-provgw-config.ocudr:5001)
- H - true if OCCNE is 1.9.x and above, else false (true)
- I - fqdn and port for fourg stub in the form (fqdn:port)
- J - fqdn and port for 1st diameter tool endpoint
- K - fqdn and port for notify stub for TLS scenarios (tlsnotify-stub-service.ocudr:8443)
- L - Service name of UDR1 provisioning ingressgateway in the format FQDN:PORT(ocudr-ingressgateway-prov.ocudr:80)

- M - Service name of site2 UDR provisioning ingressgateway in the format FQDN:PORT(ocudr2-ingressgateway-prov.ocudr-s2:80)
- N - Diameter Stub Tool1 Deploy Name (diamtoola-diam-stub)
- O - Diameter Stub Tool2 Deploy Name (diamtoolb-diam-stub)
- P - Migration tool Helm release name (migration-tool)
- Q - Deployment name of the TLS notify stub (tlsnotifystub-ocstub-py)
- R - Enable error response logging validation (true)

**Figure 4-114 UDR NewFeatures Pipeline Configuration**

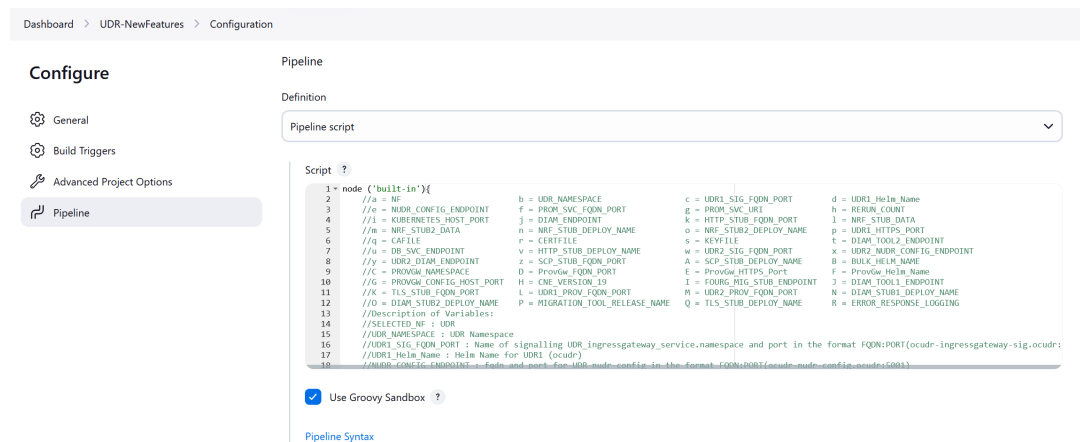

4. Click **Save** after making necessary changes. The **Pipeline UDR-NewFeatures** page appears.
5. Click **Build with Parameters**. The page lists all the newly added features and displays the total number of features and the scenarios in each feature, name of each feature, and scenarios in each feature.
  - Select the Configuration\_Type. For more information, see [Parameterization](#).
  - Choose the **Select\_Option(s)**, which are:
    - **All:** By default, it selects all the UDR test cases to run. Scroll-down and click **Build** to run all the test cases.
    - **Single/MultipleFeatures:** This option allows you to select any number of test cases you want to run from the list of total test cases available for execution.
6. After selecting the test cases, scroll-down and click **Build** to run the selected UDR test cases.

### 4.8.7.2 Running UDR Regression Pipeline

To run the UDR-Regression pipeline test cases:

#### Running UDR Regression Pipeline: Model 1: Single Site Deployment

1. Click **UDR-Regression** and then, click **Configure**.

**Figure 4-115 UDR Regression Pipeline**

2. The **General** tab appears. The user must wait for the page to load completely.
3. Select the **Discard old Builds**. This option allows you to configure the number of builds you want to retain in the persistent volume.

**Note**

It is recommended to configure this option. If there are large number of builds, the [Persistent Volume](#) may be utilized completely.

4. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:

**Important**

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Do not change any value other than from **line number 65 to 107**. You can change the parameters marked as "**b**" - to - "**R**" as per user requirement. The parameters details are provided as comments in **line number 14 to 57c**. The parameters description is as follows:

- a - Name of the NF to be tested in capital (UDR).
- b - Namespace in which the udr is deployed.
- c - Name of signalling UDR1\_ingressgateway\_service.namespace and port (ocudr-ingressgateway-sig.ocudr:80).
- d - Helm release name of UDR (ocudr)
- e - FQDN and Port UDR's nudr-config in the format fqdn:port (ocudr-nudr-config.ocudr:5001)

- f - Name\_of\_Prometheus\_service.namespace and port(occne-prometheus-server.occne-infra:80).
- g - If this option is not provided, Prometheus URI shall be /api/v1 (Default: /prometheus/api/v1) (if CNE 1.9+ /<cne-cluster-name>/prometheus/api/v1)
- h - Number of times the re-run of failed case is allowed (default as 1).
- i - Name and port of Kubernetes Host server in the format FQDN:PORT(kubernetes.default:443).
- j - fqdn and port for DIAMETER\_ENDPOINT in the format FQDN:PORT (ocudr-nudr-diam-gateway:3868)
- k - fqdn or IP of http2-server in the format <ip/fqdn> (fqdn) (notify-stub-service.ocudr:80)
- l - fqdn or IP for primary nrf stub and port in the format <ip/fqdn>:<port> (nrf-stub-server.ocudr:8080)
- m - fqdn or IP for secondary nrf stub and port in the format <ip/fqdn>:<port> (nrf-stub-server2.ocudr:8080)
- n - primary stub deployment name (nrfstub-ocstub-py)
- o - secondary stub deployment name (nrfstub2-ocstub-py)
- p - HTTPS port for UDR (443)
- q - root certificate authority (CA) (caroot.cer)
- r - Server certificate signed with root CA private key (apigatewayrsa.cer)
- s - private key to .pem format (rsa\_private\_key\_pkcs1.pem)
- t - fqdn and port for 2nd diameter tool endpoint
- u - MYSQL SERVICE ENDPOINT
- v - NOTIFY STUB deployment name
- w - Name of signaling in the format fqdn:port (ocudr-s2-ingressgateway-sig.ocudr-s2:80)
- x - fqdn and port for UDR2 nudr-config (ocudr2-nudr-config.ocudr:5001)
- y - fqdn and port for UDR2 DIAMETER\_ENDPOINT (fqdn:port) (ocudr-s2-nudr-diam-gateway.ocudr-s2:3868)
- z - FQDN and port for SCP stub (scp-stub-service:8080)
- A - Deployment name for SCP stub (scpstub-notify-ocstub-py)
- B - Bulk import helm name
- C - ProvGw namespace (ocudr)
- D - ProvGw endpoint in format fqdn:port (provgw-prov-ingressgateway.ocudr:80)
- E - ProvGw endpoint https port(443)
- F - ProvGw helm name
- G - ProvGw config host in the format fqdn:port(provgw-provgw-config.ocudr:5001)
- H - true if OCCNE is 1.9.x and above, else false (true)
- I - fqdn and port for fourg stub in the form (fqdn:port)
- J - fqdn and port for 1st diameter tool endpoint
- K - port for notify stub for TLS scenarios (8443)

- L - Service name of UDR1 provisioning ingressgateway in the format FQDN:PORT(ocudr-ingressgateway-prov.ocudr:80)
  - M - Service name of site2 UDR provisioning ingressgateway in the format FQDN:PORT(ocudr2-ingressgateway-prov.ocudr-s2:80)
  - N - Diameter Stub Tool1 Deploy Name (diamtoola-diam-stub)
  - O - Diameter Stub Tool2 Deploy Name (diamtoolb-diam-stub)
  - P - Migration tool helm release name (migration-tool)
  - Q - Deployment name of the TLS notify stub (tlsnotifystub-ocstub-py)
  - R - Enable error response logging validation (true)
5. Click **Save**. The **Pipeline UDR-Regression** page appears.
  6. Click **Build with Parameters**. A page listing all the regression features and displays the total count of the features and displays the total count of the features, count of scenarios in each feature, name of each feature, and scenarios in each feature.

**Figure 4-116 UDR Regression Pipeline Site Deployment**

The screenshot displays the 'Pipeline UDR-Regression' page in the Oracle Communications Cloud Native Core Automated Test Suite. The page is titled 'Oracle Communications Cloud Native Core Automated Test Suite - UDR'. It features a sidebar with navigation options: Status, Changes, Build with Parameters, Configure, Full Stage View, Favorite, Open Blue Ocean, Rename, Test Results Analyzer, Pipeline Syntax, Build History, and Trend. The main content area is divided into two sections: 'EXECUTION OPTIONS' and 'FEATURES AND TESTCASES'. The 'EXECUTION OPTIONS' section includes fields for TestSuite (Regression), SUT (UDR), SUTSuite (All), Configuration\_Type (Product\_Config), Include\_NewFeatures (NO), Fetch\_Log\_Upon\_Failure (NO), Log\_Type (Not Applicable), and Log\_Level (Not Applicable). The 'FEATURES AND TESTCASES' section lists features for Stage 1, including bulk\_import\_metrics\_autocreate\_true, UDR\_Bulk\_Import, UDR\_Bulk\_Import\_xml\_part1, UDR\_Bulk\_Import\_PolicyAndVia, UDR\_ProvGix\_Prov-Headers, and Diameter\_All\_Entities. A 'Build' button is visible at the bottom.

7. Click **Build** to run the test cases.



**Figure 4-117 Consolidated Test Report**

```

[Pipeline] catchError
[Pipeline] {
[Pipeline] sh (Stage: Stage_3 Group: provgw_no_igw_dr_metrics Result)
+ set +x
*****Stage: Stage_3 Group: provgw_no_igw_dr_metrics Result*****
Final Result:-
Total-Features RUN 15, PASS 15, FAIL 0

[Pipeline] }
[Pipeline] // catchError
[Pipeline] catchError
[Pipeline] {
[Pipeline] sh (Stage: Stage_3 Group: udr_no_igw_dr_metrics Result)
+ set +x
*****Stage: Stage_3 Group: udr_no_igw_dr_metrics Result*****
Final Result:-
Total-Features RUN 5, PASS 5, FAIL 0

[Pipeline] }
[Pipeline] // catchError
[Pipeline] catchError
[Pipeline] {
[Pipeline] sh (Stage: Stage_4 Group: sequential_execution Result)
+ set +x
*****Stage: Stage_4 Group: sequential_execution Result*****

```

**Note**

- For information about Configuration\_Type, see [Parameterization](#).
- The **SUITSuite** option selected as 'ALL' will run all suites except multiple site scenarios.

Sample output with expected failures are as follows:

```

Stage:Stage_2 Group:no_igw_dr_metrics
  UDR_Error_Response_log_validation.feature:299
  UDR_Error_Response_log_Ondemand_05
  UDR_Suppressed_notification_to_the_initiator.feature:255
  UDR_Suppressed_notification_to_the_initiator_05

```

**Running UDR Regression Pipeline: Model 2: Multiple Site Deployment**

1. Click **UDR-Regression** and then, click **Configure**.

**Figure 4-118 UDR Regression Pipeline**

2. The **General** tab appears. The user must wait for the page to load completely.
3. Select the **Discard old Builds**. This option allows you to configure the number of builds you want to retain in the persistent volume.

#### **Note**

It is recommended to configure this option. If there are large number of builds, the [Persistent Volume](#) may be utilized completely.

4. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:

#### **Important**

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Do not change any value other than from **line number 63 to 103**. You can change the parameters marked as "**b**" - to - "**R**" as per user requirement. The parameters details are provided as comments in line number **14 to 57**. The parameters description is as follows:

- a - Name of the NF to be tested in capital (UDR).
- b - Namespace in which the udr is deployed.
- c - Name of signalling UDR1\_ingressgateway\_service.namespace and port (ocudr-ingressgateway-sig.ocudr:80).
- d - Helm release name of UDR (ocudr)
- e - FQDN and Port UDR's nudr-config in the format fqdn:port (ocudr-nudr-config.ocudr:5001)
- f - Name\_of\_Prometheus\_service.namespace and port(occne-prometheus-server.occne-infra:80).

- g - If this option is not provided, Prometheus URI shall be /api/v1 (Default: /prometheus/api/v1) (if CNE 1.9+ /<cne-cluster-name>/prometheus/api/v1)
- h - Number of times the re-run of failed case is allowed (default as 1).
- i - Name and port of Kubernetes Host server in the format FQDN:PORT(kubernetes.default:443).
- j - fqdn and port for DIAMETER\_ENDPOINT in the format FQDN:PORT (ocudr-nudr-diam-gateway:3868)
- k - fqdn or IP of http2-server in the format <ip/fqdn> (fqdn) (notify-stub-service.ocudr:80)
- l - fqdn or IP for primary nrf stub and port in the format <ip/fqdn>:<port> (nrf-stub-server.ocudr:8080)
- m - fqdn or IP for secondary nrf stub and port in the format <ip/fqdn>:<port> (nrf-stub-server2.ocudr:8080)
- n - primary stub deployment name (nrfstub-ocstub-py)
- o - secondary stub deployment name (nrfstub2-ocstub-py)
- p - HTTPS port for UDR (443)
- q - root certificate authority (CA) (caroot.cer)
- r - Server certificate signed with root CA private key (apigatewayrsa.cer)
- s - private key to .pem format (rsa\_private\_key\_pkcs1.pem)
- t - fqdn and port for 2nd diameter tool endpoint
- u - MYSQL SERVICE ENDPOINT
- v - NOTIFY STUB deployment name
- w - Name of signaling in the format fqdn:port (ocudr-s2-ingressgateway-sig.ocudr-s2:80)
- x - fqdn and port for UDR2 nudr-config (ocudr2-nudr-config.ocudr:5001)
- y - fqdn and port for UDR2 DIAMETER\_ENDPOINT (fqdn:port) (ocudr-s2-nudr-diam-gateway.ocudr-s2:3868)
- z - FQDN and port for SCP stub (scp-stub-service:8080)
- A - Deployment name for SCP stub (scpstub-notify-ocstub-py)
- B - Bulk import helm name
- C - ProvGw namespace (ocudr)
- D - ProvGw endpoint in format fqdn:port (provgw-prov-ingressgateway.ocudr:80)
- E - ProvGw endpoint https port(443)
- F - ProvGw helm name
- G - ProvGw config host in the format fqdn:port(provgw-provgw-config.ocudr:5001)
- H - true if OCCNE is 1.9.x and above, else false (true)
- I - fqdn and port for fourg stub in the form (fqdn:port)
- J - fqdn and port for 1st diameter tool endpoint
- K - port for notify stub for TLS scenarios (8443)
- L - Service name of UDR1 provisioning ingressgateway in the format FQDN:PORT(ocudr-ingressgateway-prov.ocudr:80)

- M - Service name of site2 UDR provisioning ingressgateway in the format FQDN:PORT(ocudr2-ingressgateway-prov.ocudr-s2:80)
  - N - Diameter Stub Tool1 Deploy Name (diamtoola-diam-stub)
  - O - Diameter Stub Tool2 Deploy Name (diamtoolb-diam-stub)
  - P - Migration tool helm release name (migration-tool)
  - Q - Deployment name of the TLS notify stub (tlsnotifystub-ocstub-py)
  - R - Enable error response logging validation (true)
5. Click **Save**. The **Pipeline UDR-Regression** page appears.
  6. Click **Build with Parameters**. A page listing all the regression features and displays the total count of the features and displays the total count of the features, count of scenarios in each feature, name of each feature, and scenarios in each feature.

**Figure 4-119 UDR Regression Pipeline Multiple Site Deployment**

The screenshot shows the 'Pipeline UDR-Regression' page. The left sidebar contains navigation links: Status, Changes, Build with Parameters, Configure, Full Stage View, Favorite, Open Blue Ocean, Rename, Test Results Analyzer, and Pipeline Syntax. The main content area is titled 'Pipeline UDR-Regression' and includes a search bar. Below the title, it states 'This build requires parameters:'. The 'EXECUTION OPTIONS' section contains several dropdown menus and checkboxes: TestSuite (Regression), SUT (UDR), SUTSuite (Multi\_Site), Configuration\_Type (Product\_Config), Include\_NewFeatures (NO), Fetch\_Log\_Upon\_Failure (NO), Log\_Type (Not Applicable), and Log\_Level (Not Applicable). The 'FEATURES AND TESTCASES' section shows a dropdown for Features (All) and a list of features: Stage: Multi\_Site Group: two\_site, and UDR\_Multisite. At the bottom, there are 'Build' and 'Cancel' buttons.

7. Click **Build** to run the test cases.

**Note**

- For information about Configuration\_Type, see [Parameterization](#).
- The **SUTSuite** option selected as 'MULTISITE' will run multiple site scenarios only.

**Figure 4-120 Consolidated Test Report**

```
*****Overall Result*****

Took 0h7m14s


Final Result:-
Total-Features RUN 1, PASS 1, FAIL 0
```

### 4.8.7.3 Running UDR HealthCheck Pipeline

To run health check on UDR:


1. Navigate to **UDR-HealthCheck** pipeline and click **Configure**.

**Figure 4-121 UDR-HealthCheck Pipeline**

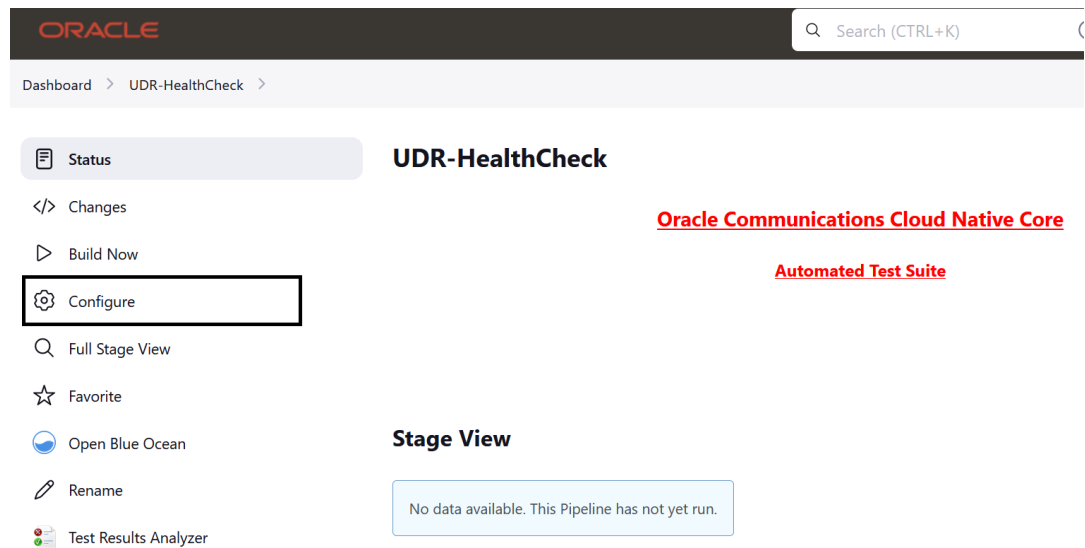

2. The **General** tab appears. The user must wait for the page to load completely.
3. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:

**Figure 4-122 UDR-HealthCheck Configuration**

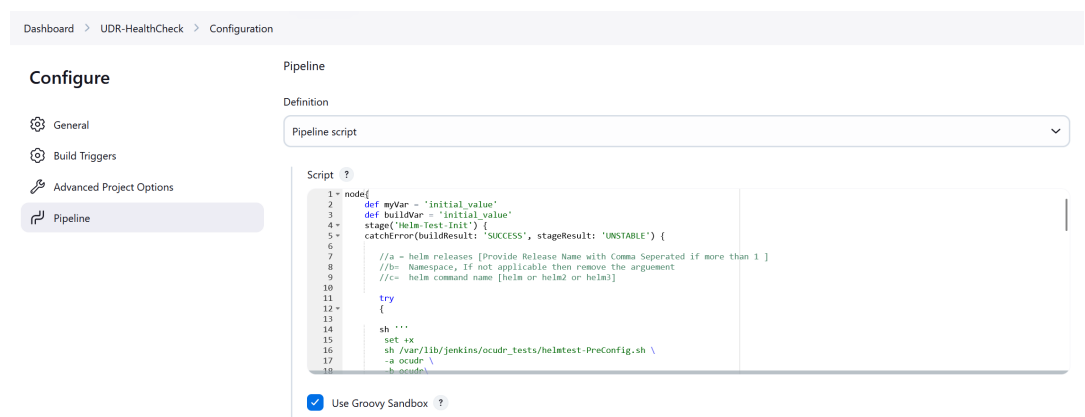

#### ! Important

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Do not change any value other than **line numbers 17 and 18**. You can change the parameters marked as "**a**", "**b**" and "**c**" as per user requirement. The parameters details are provided as comments in **line number 7 and 9**. The parameters description is as follows:

- a - helm releases [Provide Release Name with Comma Separated if more than 1 ]
  - b - namespace of SUT
  - c - helm command alias (helm or helm2 or helm3)
4. Click **Save**. The **Pipeline UDR-HealthCheck** page appears.
  5. Click **Build Now**. This triggers health check for SUT.

**Figure 4-123 UDR-HealthCheck Build Now**

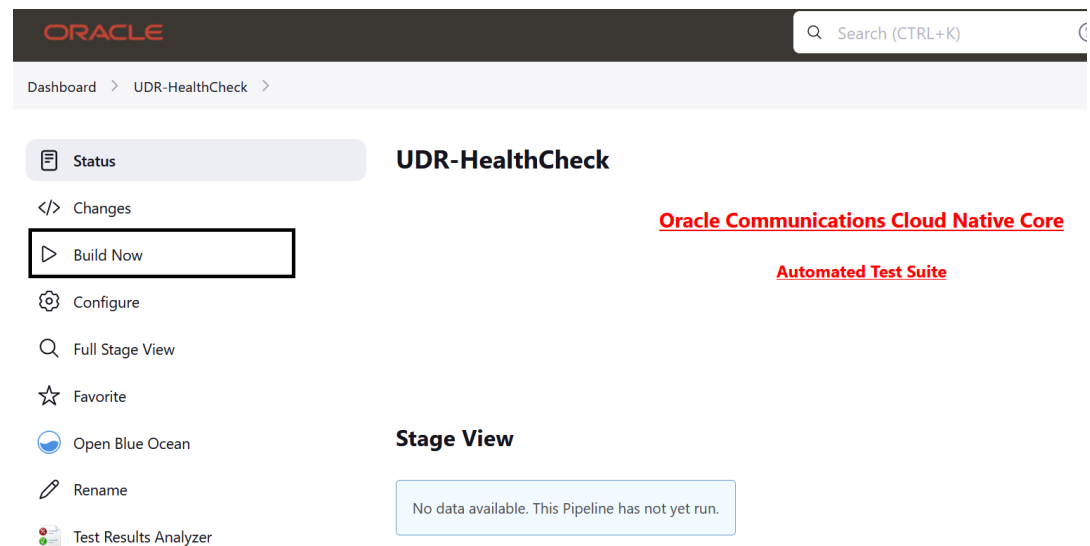


**Figure 4-124 Sample Output**

```

NAME: ocudr-ravi
LAST DEPLOYED: Sun Oct 15 19:15:05 2023
NAMESPACE: ats-ravi
STATUS: deployed
REVISION: 1
TEST SUITE:   ocudr-ravi-test
Last Started: Wed Oct 18 17:47:13 2023
Last Completed: Wed Oct 18 17:47:38 2023
Phase:        Succeeded
NOTES:
# Copyright 2019 (C), Oracle and/or its affiliates. All rights reserved.

Thank you for installing ocudr.

Your release is named ocudr-ravi , Release Revision: 1.
To learn more about the release, try:

$ helm status ocudr-ravi
$ helm get ocudr-ravi
[0m

[Pipeline] }
[Pipeline] // catchError
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS

```

#### 4.8.7.4 UDR NewFeatures Documentation

To view the documentation of UDR-NewFeatures, click **Documentation** in the left navigation pane of the UDR-NewFeatures pipeline to view all the UDR new features test cases.

**Figure 4-125 UDR-NewFeatures Documentation**

The screenshot displays the Oracle Communications Cloud Native Core Automated Test Suite (ATS) interface. The top navigation bar includes the Oracle logo, a search bar, and user information (udruser). The main content area shows the 'UDR-NewFeatures' pipeline with a green checkmark icon. The left sidebar contains a list of navigation items: Status, Changes, Build with Parameters, Configure, Full Stage View, Documentation (highlighted with a red box), HTML Report, Favorite, Open Blue Ocean, Rename, and Test Results Analyzer. The right sidebar shows the 'Test Result Trend' graph, which is currently empty, and a 'Last Successful Artifacts' section at the bottom.

UDR new features list along with its description is as follows:

**Table 4-19 UDR New Features List**


| Feature                                                                   | Description                                                                                          |
|---------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| UDR_Suppressed_notification_to_the_initiator.feature                      | Validates the Suppress Notification feature on UDR.                                                  |
| UDR_Bulk_Import_Error_Logging.feature                                     | Validates the Error Response Logging on subscriber bulk import tool.                                 |
| UDR_Bulk_import_ixml_new.feature                                          | Validates the additional scenarios for bulk import with IXML files.                                  |
| UDR_Config_Error_Logging_Validation.feature                               | Validates the logging of error responses for configuration updates.                                  |
| UDR_Error_Response_log_validation.feature                                 | Validates the Error Response Logging feature.                                                        |
| UDR_Migration_Tool_Error_Logging.feature                                  | Validates the Error Response Logging on migration tool.                                              |
| UDR_Notification_Retry.feature                                            | Validates the changes done to notification service.                                                  |
| UDR_Subscriber_Activity_Logging_Additional_scenarios.feature              | Validates the additional scenarios for subscriber activity logging feature.                          |
| UDR_Multisite_Suppressed_notification_to_the_initiator.feature(Multisite) | Validates the Suppress Notification feature on UDR for a Multiple site setup.                        |
| ProvGw_TLS_V12_Validation.feature                                         | Validates backward compatibility of TLS with TLSv1.2 request to Provisioning Gateway.                |
| UDR_TLS_V12_Validation.feature                                            | Validates the backward compatibility of TLS with TLSv1.2 provisioning and signaling requests to UDR. |
| UDR_POST_existing_subscription.feature                                    | Validates the UDR POST operation on existing subscriptions for PCF.                                  |
| UDR_PCF_Notification_Subs_Delete.feature                                  | Validates the UDR notifications when subscriber is deleted.                                          |

Click any feature to view its description.

### 4.8.7.5 UDR Regression Documentation

Click **Documentation** in the left navigation pane of the UDR-Regression pipeline to view all the UDR regression test cases.

**Figure 4-126 UDR-Regression Documentation**

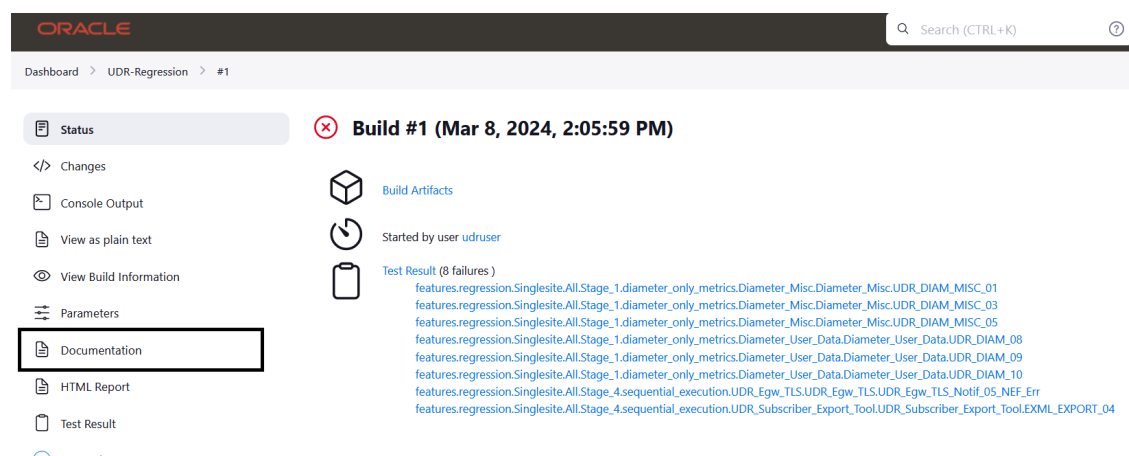



Click any feature to view its description.

## 4.8.8 Running EIR Pipelines

This section describes how to run EIR related pipelines. It includes:


- [Running EIR NewFeatures Pipeline](#)
- [Running EIR HealthCheck Pipeline](#)
- [EIR NewFeatures Documentation](#)

### 4.8.8.1 Running EIR NewFeatures Pipeline

To run the EIR-NewFeatures pipeline test cases:

1. Click **EIR-NewFeatures**. Click **Configure** in the left navigation pane. The **General** tab appears. The user must wait for the page to load completely.

**Figure 4-127 EIR NewFeatures Pipeline**

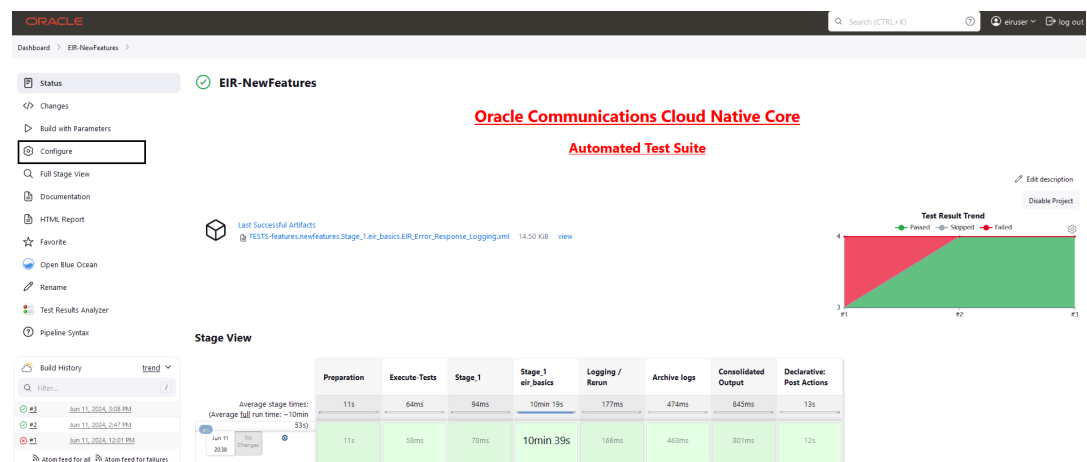

2. Once the page loads completely, select the **Discard old Builds**. This option allows you to configure the number of builds you want to retain in the persistent volume.

#### Note

It is recommended to configure this option. If there is large number of build, the [Persistent Volume](#) may be utilized completely.

3. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration as follows:

#### Important

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

You should not change any other value apart from **line number 48 to 76**. It means you can change the parameters marked as "**b**" - to - "**D**" as per user requirement. The parameters

details are provided as comments in **line number 11 to 40**. The parameters description is as follows:

- a - Selected NF.
- b - NameSpace in which UDR is Deployed.
- c - EIR signaling FQDN and PORT in the format FQDN:POR.
- d - EIR provisioning FQDN and PORT in the format FQDN:PORT.
- e - EIR config service FQDN and PORT in the format FQDN:PORT.
- f - FQDN:PORT format for primary nrf-stub.
- g - FQDN:PORT format for secondary nrf-stub.
- h - FQDN and PORT of Kubernetes Host server in the format FQDN:PORT.
- i - Helm name of EIR.
- j - primary nrf-stub deployment name.
- k - secondary nrf-stub deployment name.
- l - primary nrf-stub metric port
- m - secondary nrf-stub metric port
- n - bulk import Helm name
- o - Number of retries to check if pod down is successful.
- p - Number of retries to check if pod up is successful.
- q - Number of retries when ATS detects tcp connection failures.
- r - Time interval in seconds between tcp connection retries.
- s - re-run count.
- t - FQDN and PORT of Prometheus server in the format FQDN:PORT.
- u - prometheus uri apiName and apiVersion.
- v - EIR HTTPS port.
- w - root certificate authority for signalling ingressgateway.
- x - Server certificate signed with root CA private key for signalling ingressgateway.
- y - private key in .pem format for signalling ingressgateway.
- z - root certificate authority for provisioning ingressgateway.
- A - Server certificate signed with root CA private key for provisioning ingressgateway.
- B - Private key in .pem format for provisioning ingressgateway.
- C - True if HA prometheus else false (default: true)
- D - Enable error response logging validation (true)

**Figure 4-128 EIR NewFeatures Pipeline Configuration**

Dashboard > EIR-NewFeatures > Configuration

**Configure**

- General
- Build Triggers
- Advanced Project Options
- Pipeline**

**Pipeline**

Definition

Pipeline script

Script ?

```

1 = node ('built-in'){
2   //a = SELECTED_NF      b = EIR_NAMESPACE      c = EIR_SIG_FQDN_PORT      d = EIR_PROV_FQDN_PORT
3   //e = EIR_CONF_FQDN_PORT f = STUB1_FQDN_PORT      g = STUB2_FQDN_PORT      h = KUBERNETES_FQDN_PORT
4   //i = EIR_HELP_NAME      j = STUB1_DEPLOY_NAME      k = STUB2_DEPLOY_NAME      l = STUB1_METRICS_PORT
5   //m = STUB2_METRICS_PORT n = BULK_IMPORT_DEP_NAME o = POD_DOWN_RETRIES      p = POD_UP_RETRIES
6   //q = HTTP_CONNECT_RETRY r = HTTP_RETRY_INTERVAL      s = RERUN_COUNT      t = PROXY_FQDN_PORT
7   //u = PROMSEVCURI      v = EIR_HTTPS_PORT      w = CAFILE      x = CERTFILE
8   //y = KEYFILE      z = CAFILE_PROV      A = CERTFILE_PROV      B = KEYFILE_PROV
9   //C = HA_Prov      D = ERROR_RESPONSE_LOGGING
10  //Description of Variables:
11  //SELECTED_NF : EIR
12  //EIR_NAMESPACE : EIR Namespace (ocnr)
13  //EIR_SIG_FQDN_PORT : EIR signaling fqdn and port in the format FQDN:PORT (ocnr-ingressgateway-sig.ocnr:80)
14  //EIR_PROV_FQDN_PORT : EIR signaling fqdn and port in the format FQDN:PORT (ocnr-ingressgateway-sig.ocnr:80)
15  //EIR_CONF_FQDN_PORT : EIR nads-config fqdn and port in the format FQDN:PORT (ocnr-nads-config.ocnr:5001)
16  //STUB1_FQDN_PORT : Primary NRF Stub fqdn and port in the format FQDN:PORT (nrf-stub-service1.ocnr:8080)
17  //STUB2_FQDN_PORT : Secondary NRF Stub fqdn and port in the format FQDN:PORT (nrf-stub-service2.ocnr:8080)
18  //BULK_IMPORT_DEP_NAME : Name and port of subordinates stub services in the format FQDN:PORT (subordinate-defn:443)

```

☒ Use Groovy Sandbox

Pipeline Syntax

**Note**

Setting rerun count, number of retries to check pod status and segment details:

- Rerun count can be set to any desired value by changing option 's' in the pipeline script.
- Number of retries to check if pod is down can be set by providing option 'o' in the pipeline script.
- Number of retries to check if pod is up can be set by providing option 'p' in the pipeline script.
- If ProvGw is deployed with segment details having UDR fqdn and port, provide option 'l' as port.
- Option 'u' will take the value '/<domain name>/prometheus/api/v1' for CNE version 1.9 and above or OSO version 1.10.x and above. Run the below command, If domain name is not known. The domain name can be found after executing the command from ATS pod:  
curl http://<prometheus fqdn>:<port>/

Example:

```
curl http://occne-kube-prom-stack-kube-prometheus.occne-infra/
<a href="/udr-cne/prometheus">Found</a>
```

4. Click **Save** after making necessary changes. The **Pipeline EIR-NewFeatures** page appears.

Figure 4-129 EIR Build with Parameters

The figure consists of two screenshots of the Oracle Cloud Native Core Automated Test Suite (ATS) interface, specifically the 'Pipeline EIR-NewFeatures' configuration page.

**Top Screenshot:** This view shows the configuration parameters for the pipeline. The left sidebar contains navigation options: Status, Changes, Build with Parameters, Configure, Full Stage View, Rename, Test Results Analyzer, and Pipeline Syntax. The 'Build History' section shows 'No builds'. The main area displays the pipeline configuration with the following parameters:

- TestSuite:** NewFeatures
- SUT:** EIR
- Configuration\_Type:** ☒ Product\_Config, ☐ Custom\_Config
- Select\_Option:** ☒ All, ☐ Single/MultipleFeatures
- Features:** EIR\_IMDSV, EIR\_IMDSV\_AccessLog

**Bottom Screenshot:** This view shows the 'EXECUTION OPTIONS' and 'FEATURES AND TESTCASES' sections. The 'EXECUTION OPTIONS' section includes:

- TestSuite:** NewFeatures
- SUT:** EIR
- Configuration\_Type:**
- Include\_Regression:**
- Fetch\_Log\_Upon\_Failure:**
- Log\_Type:** ☒ Not Applicable
- Log\_Level:**

The 'FEATURES AND TESTCASES' section shows:

- Features:**
- Stage:** Stage\_1 Group: eir\_basics
- TestCases:** EIR\_Error\_Response\_Logging

At the bottom of the bottom screenshot, there are 'Build' and 'Cancel' buttons.

5. Click **Build with Parameters**. The page lists all the newly added features and displays the total count of features, counts of scenarios in each feature, name of each feature, and scenarios in each feature.
6. To view consolidated and detailed stack trace results in case of any failures, click Test Results Analyzer in the left navigation pane. The test results analyzer report appears. For more information, see [Test Results Analyzer](#).

Figure 4-130 EIR-NewFeatures Pipeline Consolidated Automation Suite Test Report

```
The below are the consolidated output of all the features that are run
[Pipeline] catchError
[Pipeline] { (hide)
[Pipeline] sh (Stage: Stage_1 Group: eir_basics Result)
+ set +x
*****Stage: Stage_1 Group: eir_basics Result*****

Final Result:-
Total-Features RUN 1, PASS 1, FAIL 0

[Pipeline] }
[Pipeline] // catchError
[Pipeline] sh (Overall Result)
+ set +x
*****Overall Result*****

Took 0h1m3s

Final Result:-
Total-Features RUN 1, PASS 1, FAIL 0
```


For more details on consolidated test report, see [Final Summary Report, Build Color and Application Logs](#).

4.8.8.2 Running EIR Regression Pipeline

Perform the below steps to run the EIR-Regression pipeline test cases:

- 1. Click **EIR-Regression** and then, click **Configure**.

Figure 4-131 EIR Regression Pipeline

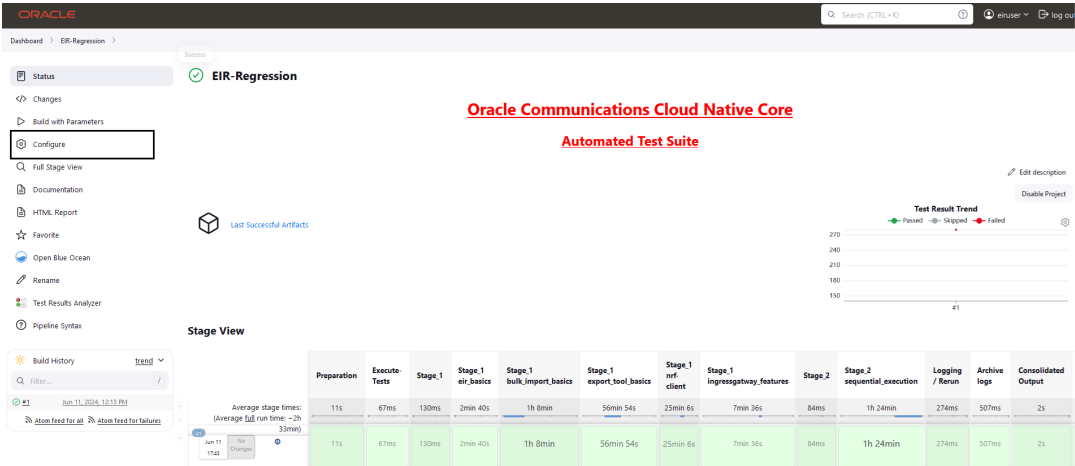

- 2. The **General** tab appears. The user must wait for the page to load completely.
- 3. Select the **Discard old Builds**. This option allows you to configure the number of builds you want to retain in the persistent volume.

**Note**

It is recommended to configure this option. If there are large number of builds, the [Persistent Volume](#) may be utilized completely.

**Figure 4-132 Discard Builds**

4. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:

**Important**

Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Do not change any value other than from **line number 48 to 76**. You can change the parameters marked as "**b**" - **to** - "**D**" as per user requirement. The parameters details are provided as comments in **line number 11 to 40**. The parameters description is as follows:

- a - Selected NF
- b - NameSpace in which UDR is Deployed
- c - EIR signaling FQDN and PORT in the format FQDN:PORT
- d - EIR provisioning FQDN and PORT in the format FQDN:PORT
- e - EIR config service FQDN and PORT in the format FQDN:PORT
- f - FQDN:PORT format for primary nrf-stub
- g - FQDN:PORT format for secondary nrf-stub
- h - FQDN and PORT of Kubernetes Host server in the format FQDN:PORT
- i - helm name of EIR
- j - primary nrf-stub deployment name
- k - secondary nrf-stub deployment name
- l - primary nrf-stub metric port
- m - secondary nrf-stub metric port

- n - bulk import Helm name
  - o - Number of retries to check if pod down is successful
  - p - Number of retries to check if pod up is successful
  - q - Number of retries when ATS detects tcp connection failures
  - r - Time interval in seconds between tcp connection retries
  - s - re-run count
  - t - FQDN and PORT of Prometheus server in the format FQDN:PORT
  - u - prometheus uri apiName and apiVersion
  - v - EIR HTTPS port
  - w - root certificate authority for signalling ingressgateway
  - x - Server certificate signed with root CA private key for signalling ingressgateway
  - y - private key in .pem format for signalling ingressgateway
  - z - root certificate authority for provisioning ingressgateway
  - A - Server certificate signed with root CA private key for provisioning ingressgateway
  - B - Private key in .pem format for provisioning ingressgateway
  - C - True if HA prometheus else false(default: true)
  - D - Enable error response logging validation (true)
5. Click **Save**. The **Pipeline EIR-Regression** page appears.

**Figure 4-133 EIR Regression Configuration**

Dashboard > EIR-Regression > Configuration

### Configure

- General
- Build Triggers
- Advanced Project Options
- Pipeline**

Pipeline

Definition

Pipeline script

```

1 = node ('built-in') {
2     //a = SELECTED_NF          b = EIR_NAMESPACE          c = EIR_SIG_FQDN_PORT          d = EIR_PROV_FQDN_PORT
3     //e = EIR_CONF_FQDN_PORT  f = STUB1_FQDN_PORT          g = STUB2_FQDN_PORT          h = KUBERNETES_FQDN_PORT
4     //l = EIR_HELP_NAME       j = STUB1_DEPLOY_NAME       k = STUB2_DEPLOY_NAME       l = STUB1_METRICS_PORT
5     //m = STUB2_METRICS_PORT  n = BULK_IMPORT_DEP_NAME  o = POD_DOWN_RETRIES        p = POD_UP_RETRIES
6     //q = HTTP_CONNECT_RETRY  r = HTTP_RETRY_INTERVAL  s = RERUN_COUNT             t = PROM_FQDN_PORT
7     //u = PROMSCURL           v = EIR_HTTPS_PORT        w = CAFILE                   x = CERTFILE
8     //y = KEYFILE             z = CAFILE_PROV           A = CERTFILE_PROV           B = KEYFILE_PROV
9     //C = HA_Prom
10    //Description of Variables:
11    //SELECTED_NF : EIR
12    //EIR_NAMESPACE : EIR Namespace (ocair)
13    //EIR_SIG_FQDN_PORT : EIR signaling fqdn and port in the format FQDN:PORT (ocair-ingressgateway-sig.ocair:80)
14    //EIR_PROV_FQDN_PORT : EIR signaling fqdn and port in the format FQDN:PORT (ocair-ingressgateway-sig.ocair:80)
15    //EIR_CONF_FQDN_PORT : EIR nldr-config fqdn and port in the format FQDN:PORT (ocair-nldr-config.ocair:5001)
16    //STUB1_FQDN_PORT : Primary NRF Stub fqdn and port in the format FQDN:PORT (nrf-stub-service1.ocair:8080)
17    //STUB2_FQDN_PORT : Secondary NRF Stub fqdn and port in the format FQDN:PORT (nrf-stub-service2.ocair:8080)
18    //KUBERNETES_FQDN_PORT : Name and Port of Kubernetes Host server in the format FQDN:PORT (kubernetes.default.svc:443)

```

☒ Use Groovy Sandbox ?

Pipeline Syntax

**Note**

Setting rerun count and the number of retries to check the pod status and segment details is given below:

- Rerun count can be set to any desired value by changing option 's' in the pipeline script.
- Number of retries to check if pod is down can be set by providing option 'o' in the pipeline script.
- Number of retries to check if pod is up can be set by providing option 'p' in the pipeline script.
- If ProvGw is deployed with segment details having UDR fqdn/IP:port, provide option 'l' as "IP". If ProvGw is deployed with segment details having only UDR fqdn/IP, provide option 'l' as "fqdn". If any value other than "IP" and "fqdn" is provided, ATS assumes that the segment details in ProvGw is in "IP" mode.
- Option 'u' shall take value '/<domain name>/prometheus/api/v1 for CNE version 1.9 or above or OSO version is 1.10.x or above. Run the below command from ATS pod to find the domain name, if the domain name is not known:

```
curl http://<prometheus fqdn>:<port>/
```

Example:

```
curl http://ocne-kube-prom-stack-kube-prometheus.ocne-infra/  
<a href="/udr-cne/prometheus">Found</a>
```

6. Click **Save**. The **Pipeline EIR-Regression** page appears.
7. Click **Build with Parameters**. A page listing all the regression features and displays the total count of the features and displays the total count of the features, count of scenarios in each feature, name of each feature, and scenarios in each feature.

**Figure 4-134 EIR Regression Build with Parameters**

The screenshot shows the Oracle Communications Cloud Native Core Automated Test Suite - UDR interface. The main heading is "Pipeline EIR-Regression". Below it, a section titled "EXECUTION OPTIONS" contains several configuration fields: "TestSuite" (Regression), "SUT" (EIR), "Configuration\_Type" (Product\_Config), "Include\_NewFeatures" (NO), "Fetch\_Log\_Upon\_Failure" (NO), "Log\_Type" (Not Applicable), and "Log\_Level" (Not Applicable). Below this, a section titled "FEATURES AND TESTCASES" lists features for "Stage: Stage\_1 Group: built\_import\_basics" and "Stage: Stage\_1 Group: eir\_basics". The features include EIR\_CSV\_import, EIR\_CSV\_import, EIR\_PDBI\_IMPORT, and Prometheus\_bulk\_import. At the bottom, there are "Build" and "Cancel" buttons.



8. A sample consolidated automation suite test report, when re-run is set to 0 is as follows

**Figure 4-135 EIR-Regression Consolidated Automation Suite Test Report**


```
31 features passed, 0 failed, 0 skipped
262 scenarios passed, 0 failed, 0 skipped
6690 steps passed, 0 failed, 0 skipped, 0 undefined
Took 232m49.448s
```

### 4.8.8.3 Running EIR HealthCheck Pipeline

To run health check on EIR:

1. Navigate to **EIR-HealthCheck** pipeline and click **Configure**.

**Figure 4-136 EIR HealthCheck Pipeline**

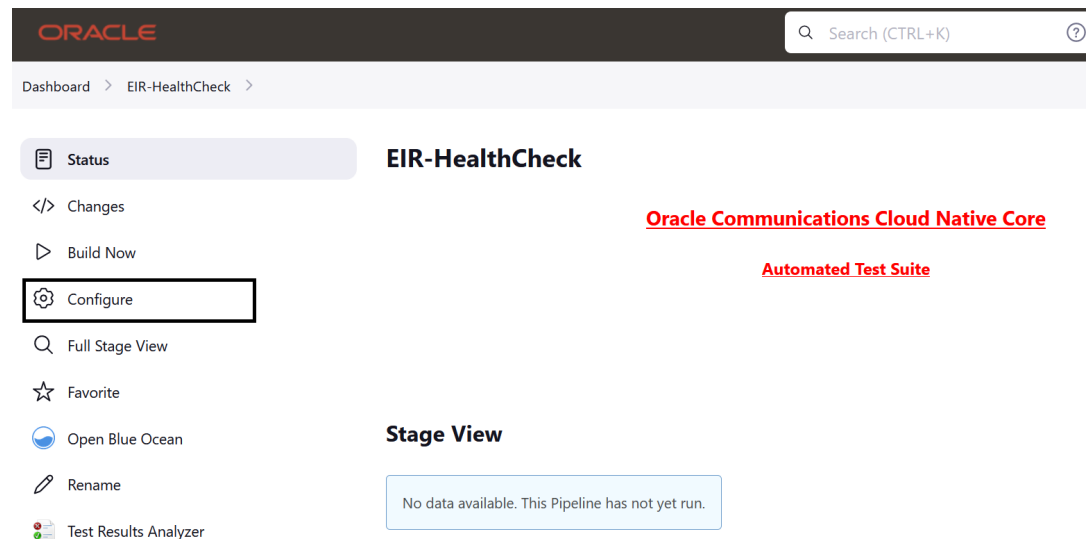


2. The **General** tab appears. The user must wait for the page to load completely.
3. Click the **Advanced Project Options** tab. Scroll-down to reach the **Pipeline** configuration section as follows:

#### **! Important**


Make sure the page loads completely before you perform any action on it. Do not modify any configuration except the one discussed below.

Do not change any value other than **line numbers 16 and 17**. You can change the parameters marked as "a" "b" and "c" as per user requirement. The parameters details are provided as comments in **line number 7 and 9**. The parameters description is as follows:

- a - helm releases [Provide Release Name with Comma Separated if more than 1 ]
- b - namespace of SUT.
- c - helm command alias (helm, helm2, or helm3)

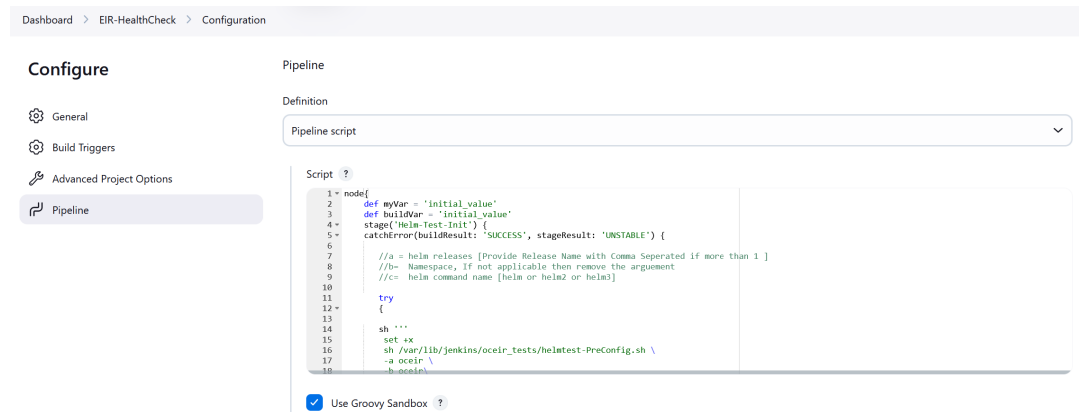**Figure 4-137 EIR-HealthCheck Pipeline configuration**


4. Click **Save**. The **Pipeline EIR-HealthCheck** page appears.
5. Click **Build Now**. This triggers health check for SUT.

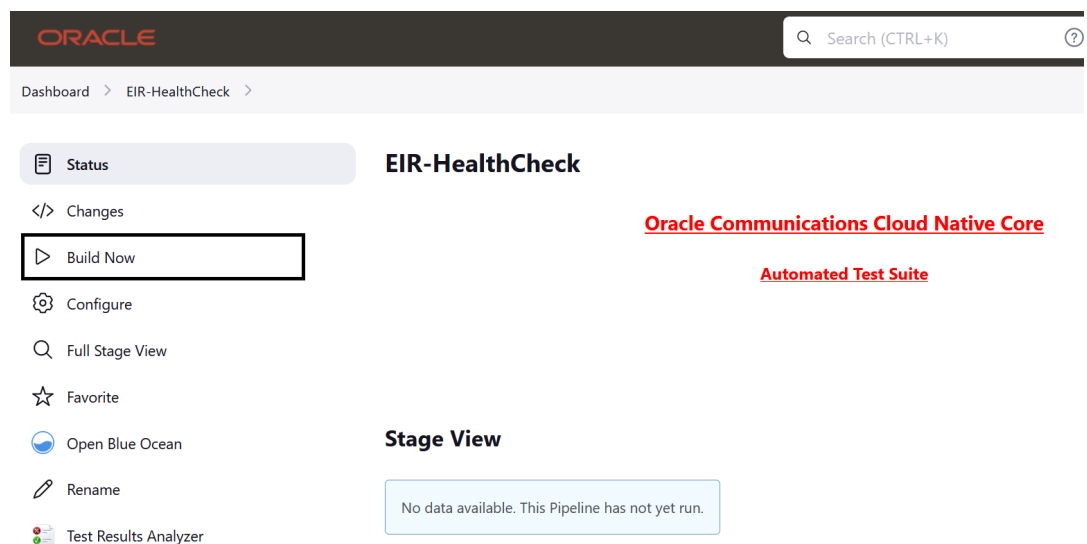**Figure 4-138 EIR-HealthCheck Build Now**

## 4.8.8.4 EIR NewFeatures Documentation

To view the documentation of EIR-NewFeatures, click the **Documentation** link in the left navigation pane (present inside the build), as follows:

Figure 4-139 EIR-New Features Documentation

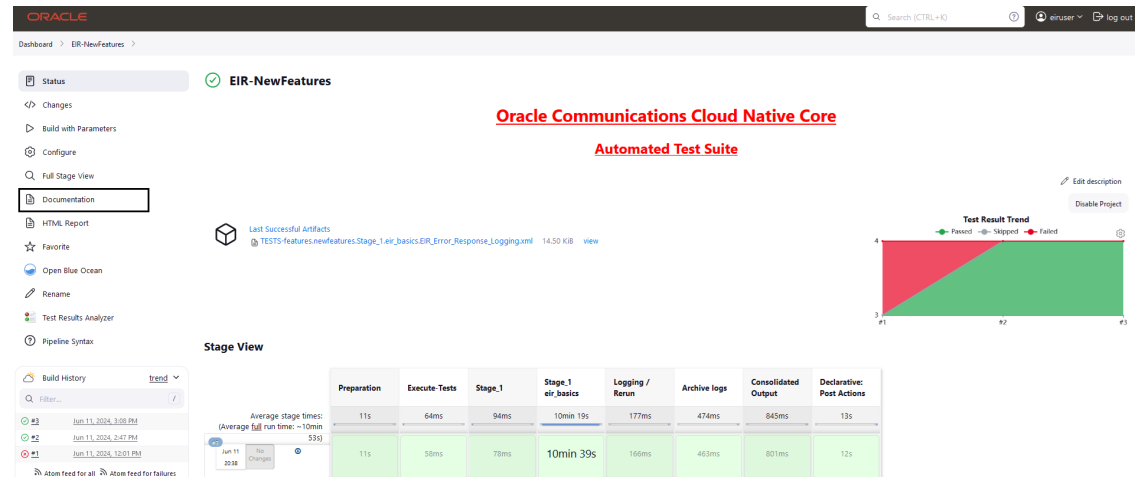

The page lists all the features. Click any feature to view description of that test case.

EIR new features list along with its description is as follows:

Table 4-20 EIR New Features List

| Feature                             | Description                                                                       |
|-------------------------------------|-----------------------------------------------------------------------------------|
| EIR_Error_Response_Logging.feature  | Validates Error Response Logging feature for EIR mode.                            |
| EIR_Sig_TLS_V12_Validation.feature  | Validate backward compatibility of TLS with TLSv1.2 signaling requests to UDR.    |
| EIR_Prov_TLS_V12_Validation.feature | Validate backward compatibility of TLS with TLSv1.2 provisioning requests to UDR. |

#### Note


The Documentation option appears only if you have run the EIR-NewFeatures pipeline test cases atleast once.

Based on the functionalities covered under **Documentation**, the **Build Requires Parameters** page displays test cases. To navigate back to the Pipeline EIR-NewFeatures page, click **Back to EIR-NewFeatures** link available on top left corner of the page.

### 4.8.8.5 EIR Regression Documentation

Click **Documentation** in the left navigation pane of the EIR Regression pipeline to view all the test cases provided.

Figure 4-140 EIR Regression Documentation

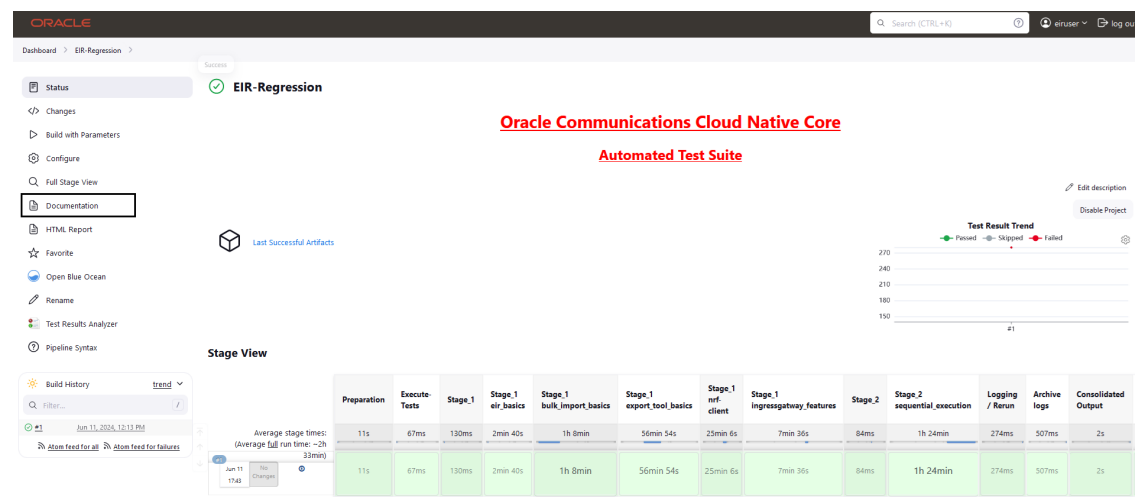

Click any feature to see the description of that test case.