

# Oracle® Communications

## Cloud Native Core, Service Communication Proxy User Guide



Release 25.2.100  
G41309-01  
November 2025

ORACLE®

Copyright © 2019, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## Preface

---

|                             |   |
|-----------------------------|---|
| Documentation Accessibility | i |
| Diversity and Inclusion     | i |
| Conventions                 | i |

## 1 Introduction

---

|                |   |
|----------------|---|
| 1.1 References | 3 |
|----------------|---|

## 2 Service Communication Proxy Architecture

---

|                                                  |   |
|--------------------------------------------------|---|
| 2.1 5G SBI Message Processing and Trigger Points | 3 |
|--------------------------------------------------|---|

## 3 Service Communication Proxy Features

---

|                                                                                                                             |    |
|-----------------------------------------------------------------------------------------------------------------------------|----|
| 3.1 Routing Options Enhancement                                                                                             | 1  |
| 3.1.1 Support for Default Notification Message Routing                                                                      | 1  |
| 3.1.1.1 Default Notification Routing Behavior at SCP                                                                        | 2  |
| 3.1.2 Routing Options Enhancement for Notification Messages                                                                 | 34 |
| 3.1.3 Routing Options Enhancement to Control SCP Routing Features                                                           | 37 |
| 3.1.3.1 Alternate Routing Configuration Based on Received Status Code 504,<br>Expired Response Timeout and Connection Error | 38 |
| 3.1.4 Routing Options Enhancements for Next Hop SCP and Notification or Callback<br>Messages                                | 39 |
| 3.2 Support for 3GPP Defined NFs, Custom NFs, and Custom NF Services                                                        | 42 |
| 3.3 Traffic Segregation                                                                                                     | 58 |
| 3.4 TLS 1.3 Support for Kubernetes API                                                                                      | 61 |
| 3.5 LCM Automation                                                                                                          | 61 |
| 3.6 Error Response Enhancement                                                                                              | 63 |
| 3.6.1 SCP Error IDs                                                                                                         | 66 |
| 3.7 Log Enhancement for 5G SBI Error Responses Generated by SCP                                                             | 78 |
| 3.8 NFProfile Processing Enhancements                                                                                       | 82 |
| 3.9 Support for cnDBTier APIs on the CNC Console                                                                            | 84 |
| 3.10 NRF Configuration Using DNS SRV Resolution                                                                             | 85 |

|          |                                                                                   |     |
|----------|-----------------------------------------------------------------------------------|-----|
| 3.11     | Support for Kubernetes Resources                                                  | 88  |
| 3.11.1   | Support for Dual Stack                                                            | 88  |
| 3.11.2   | Network Policies                                                                  | 90  |
| 3.11.3   | Pod Disruption Budget                                                             | 91  |
| 3.11.4   | SCP Microservices and Probes                                                      | 91  |
| 3.11.5   | Horizontal Pod Autoscaler                                                         | 100 |
| 3.12     | SCP Response Timeout Extension                                                    | 101 |
| 3.13     | Overload Control Based on the Overload Control Information Header                 | 103 |
| 3.14     | Support for HTTPS                                                                 | 106 |
| 3.14.1   | TLS Certificate Configuration Enhancement                                         | 108 |
| 3.14.2   | Support for TLS                                                                   | 109 |
| 3.14.3   | Support for Automated Certificate Lifecycle Management                            | 114 |
| 3.15     | Support for HTTP2 Header                                                          | 114 |
| 3.15.1   | Support for 3GPP Timestamp Related Headers                                        | 114 |
| 3.15.2   | Support for Multiple 3gpp-Sbi-Binding Headers                                     | 118 |
| 3.15.3   | Support for 3gpp-Sbi-Custom-UDR-Nf-Group-Id                                       | 119 |
| 3.16     | Enhanced NF Status Processing                                                     | 119 |
| 3.17     | Location Header for Host Mismatch                                                 | 121 |
| 3.18     | Support for the Client Credentials Assertion Header                               | 122 |
| 3.19     | Support for 5G SBI Message Correlation using the 3gpp-Sbi-Correlation-Info Header | 123 |
| 3.20     | SCP Health Check API                                                              | 124 |
| 3.21     | Verbose Logging for SCP                                                           | 127 |
| 3.22     | Support for OAuth2.0                                                              | 147 |
| 3.23     | Pod Overload Control                                                              | 151 |
| 3.24     | Host Preference for Egress Message Requests                                       | 152 |
| 3.25     | Enhanced 5G SBI Message Failure Handling                                          | 154 |
| 3.26     | Extension of HTTP Status Code List for Rerouting                                  | 162 |
| 3.27     | Load Balancing                                                                    | 163 |
| 3.28     | 5G SBI Message Mediation Support                                                  | 164 |
| 3.28.1   | Mediation Rules Configuration                                                     | 167 |
| 3.28.1.1 | Mediation Rule Migration Process                                                  | 176 |
| 3.28.2   | Mediation Log Level Configuration                                                 | 181 |
| 3.28.3   | Mediation Support for User Defined Variables in Rules and Trigger Points          | 182 |
| 3.29     | 5G SBI Message Routing                                                            | 184 |
| 3.29.1   | 5G SBI Notification Requests Processing                                           | 187 |
| 3.29.1.1 | Enhanced Notifications Handling                                                   | 192 |
| 3.29.2   | 5G SBI Service Requests Processing                                                | 194 |
| 3.30     | Message Priority Assignment and Override                                          | 197 |
| 3.31     | Outlier Detection                                                                 | 198 |
| 3.32     | Circuit Breaking                                                                  | 199 |
| 3.33     | Canary Release                                                                    | 200 |
| 3.34     | Static Configuration of NF Profiles                                               | 201 |

|          |                                                                                   |     |
|----------|-----------------------------------------------------------------------------------|-----|
| 3.35     | Preventive Audit on Last NF Instance                                              | 202 |
| 3.36     | Rate Limiting                                                                     | 203 |
| 3.36.1   | Local Rate Limit Feature                                                          | 204 |
| 3.36.2   | Global Rate Limit Feature                                                         | 205 |
| 3.36.3   | Ingress Rate Limiting                                                             | 206 |
| 3.36.4   | Egress Rate Limiting                                                              | 209 |
| 3.36.4.1 | Global Egress Rate Limiting                                                       | 210 |
| 3.36.5   | Egress and Ingress Key Combinations                                               | 213 |
| 3.37     | Support for Multus Container Network Interface                                    | 213 |
| 3.38     | Support for Model C Indirect 5G SBI Communication                                 | 215 |
| 3.39     | Multiple SCP Deployment in the Same Kubernetes Cluster                            | 217 |
| 3.40     | Support for SCP Triplet Deployment                                                | 218 |
| 3.41     | Alternate Routing based on the DNS SRV Records                                    | 219 |
| 3.42     | Support for Multiple Signaling Service IPs                                        | 221 |
| 3.43     | Egress Congestion Control Support at SCP                                          | 223 |
| 3.44     | Support for Model D Indirect 5G SBI Communication with Delegated Discovery        | 224 |
| 3.44.1   | Managing Delegated Discovery Response Caching Based on Discovery Query Parameters | 227 |
| 3.44.2   | NF Discovery Response Cache Update Based on the Received Notifications            | 228 |
| 3.45     | Support for 5G SBI Roaming                                                        | 232 |
| 3.46     | Support for Alternate Routing Using Static Configuration                          | 235 |
| 3.47     | Support for Thread Watchdog                                                       | 236 |
| 3.48     | Message Feed Enhancements                                                         | 236 |
| 3.49     | Observability Enhancements for SCP Inter-microservice Connectivity                | 241 |
| 3.50     | Load Control based on the Load Control Information Header                         | 241 |
| 3.51     | Support for Three-site Georedundancy                                              | 243 |
| 3.52     | Automated Test Suite Support                                                      | 243 |

## 4 Configuring Service Communication Proxy using the CNC Console

---

|         |                                                           |    |
|---------|-----------------------------------------------------------|----|
| 4.1     | Support for Multicluster Deployment                       | 1  |
| 4.2     | CNC Console Interface                                     | 1  |
| 4.2.1   | Configuring SCP Features                                  | 3  |
| 4.2.1.1 | Configuring the Log Enhancement Feature                   | 4  |
| 4.2.1.2 | Configuring Error Response Enhancement                    | 6  |
| 4.2.1.3 | Configuring Enhanced NF Status Processing                 | 6  |
| 4.2.1.4 | Configuring Global Egress Rate Limiting                   | 7  |
| 4.2.1.5 | Configuring Support for 5G SBI Roaming                    | 8  |
| 4.2.1.6 | Configuring Mediation                                     | 9  |
| 4.2.1.7 | Configuring Model D Indirect 5G SBI Communication feature | 10 |
| 4.2.1.8 | Configuring SCP User Agent Info                           | 11 |
| 4.2.1.9 | Configuring Message Feed                                  | 12 |

|          |                                                                               |    |
|----------|-------------------------------------------------------------------------------|----|
| 4.2.1.10 | Configuring Load Control Information (LCI)                                    | 12 |
| 4.2.1.11 | Configuring Host Preference for Egress Message Requests                       | 14 |
| 4.2.1.12 | Configuring CCA Header Validation                                             | 15 |
| 4.2.1.13 | Configuring Location Header Update for Host Mismatch                          | 17 |
| 4.2.1.14 | Configuring Support for OAuth2.0                                              | 18 |
| 4.2.1.15 | Configuring SCP Health Check API                                              | 20 |
| 4.2.1.16 | NRF Configuration using DNS SRV Resolution                                    | 22 |
| 4.2.1.17 | Configuring Overload Control Based on the Overload Control Information Header | 23 |
| 4.2.1.18 | Configuring Enhanced NFProfile Processing                                     | 26 |
| 4.2.1.19 | Configuring 3GPP Timestamp Headers Support                                    | 26 |
| 4.2.1.20 | Configuring Enhanced Notifications Handling                                   | 28 |
| 4.2.1.21 | Configuring Ingress Rate Limiting                                             | 29 |
| 4.2.1.22 | Configuring Egress Rate Limiting                                              | 29 |
| 4.2.2    | Configuring OCI                                                               | 30 |
| 4.2.3    | Configuring OCI Threshold Levels                                              | 30 |
| 4.2.4    | Viewing cnDBTier APIs on the CNC Console                                      | 31 |
| 4.2.4.1  | Backup List                                                                   | 32 |
| 4.2.4.2  | cnDBTier Backup Status                                                        | 32 |
| 4.2.4.3  | cnDBTier Version                                                              | 32 |
| 4.2.4.4  | Database Statistics Report                                                    | 33 |
| 4.2.4.5  | Georeplication Recovery                                                       | 33 |
| 4.2.4.6  | Georeplication Status                                                         | 35 |
| 4.2.4.7  | Replication HeartBeat Status                                                  | 36 |
| 4.2.4.8  | Local Cluster Status                                                          | 37 |
| 4.2.4.9  | On Demand Backup                                                              | 37 |
| 4.2.4.10 | cnDBTier Health                                                               | 38 |
| 4.2.5    | Configuring NRF SRV                                                           | 40 |
| 4.2.5.1  | Mapping NFinstanceId and ServiceInstanceId                                    | 42 |
| 4.2.6    | Configuring NRF                                                               | 43 |
| 4.2.7    | Configuring Upgrade and Rollback Event                                        | 44 |
| 4.2.8    | OAuth2.0 Configurations                                                       | 44 |
| 4.2.8.1  | Configuring Access Token Granularity                                          | 44 |
| 4.2.8.2  | Configuring OAuth2.0 Local PLMN Required                                      | 46 |
| 4.2.9    | Configuring Error Profile                                                     | 47 |
| 4.2.10   | Configuring Canary Release                                                    | 48 |
| 4.2.11   | Configuring Global Options                                                    | 50 |
| 4.2.12   | Mediation Configuration                                                       | 53 |
| 4.2.12.1 | Configuring Mediation Trigger Point                                           | 53 |
| 4.2.12.2 | Configuring Routing Options for Mediation                                     | 56 |
| 4.2.12.3 | Configuring Mediation Rules                                                   | 57 |
| 4.2.12.4 | Configuring Mediation Log Levels                                              | 60 |

|          |                                                                                   |     |
|----------|-----------------------------------------------------------------------------------|-----|
| 4.2.12.5 | Configuring Mediation Support for User Defined Variables                          | 61  |
| 4.2.13   | Configuring NF Rule Profile                                                       | 63  |
| 4.2.13.1 | Fetching NF Rule Profile Data                                                     | 69  |
| 4.2.14   | Configuring SCP Profile                                                           | 70  |
| 4.2.15   | Configuring Topology Source Info                                                  | 72  |
| 4.2.16   | Fetching Routing Rules                                                            | 73  |
| 4.2.17   | Configuring Ingress Rate Limiting                                                 | 74  |
| 4.2.18   | Configuring Egress Rate Limiting                                                  | 74  |
| 4.2.19   | Configuring Server Header                                                         | 75  |
| 4.2.20   | Configuring Pod Overload Control Policies                                         | 76  |
| 4.2.21   | Configuring SBI Message Priority                                                  | 78  |
| 4.2.22   | Configuring DNS SRV based Alternate Routing                                       | 79  |
| 4.2.22.1 | Configuring Routing Modes                                                         | 79  |
| 4.2.22.2 | Configuring the Default TTL Value                                                 | 80  |
| 4.2.22.3 | Configuring Alternate NF Group                                                    | 81  |
| 4.2.22.4 | Configuring Refresh DNS SRV Data                                                  | 82  |
| 4.2.23   | Configuring SBI Message Priority and Error Profiles for Egress Congestion Control | 83  |
| 4.2.24   | Configuring the nextHopSCP Routing Option                                         | 84  |
| 4.2.25   | Configuring SEPP Inter PLMN Routing                                               | 86  |
| 4.2.26   | Configuring Route Groups                                                          | 88  |
| 4.2.27   | Configuring Ingress Rate Limiter Consumer Info                                    | 89  |
| 4.2.28   | Configuring SCP Services                                                          | 91  |
| 4.2.29   | Configuring Outlier Detection                                                     | 94  |
| 4.2.30   | Configuring Traffic Feed                                                          | 95  |
| 4.2.31   | Congestion Control Configurations                                                 | 95  |
| 4.2.32   | Configuring Routing Options                                                       | 97  |
| 4.2.33   | Configuring Routing Config Set                                                    | 98  |
| 4.2.34   | Configuring NFTypes-NFServices                                                    | 99  |
| 4.2.35   | Configuring NF Service Feature Config                                             | 100 |
| 4.2.36   | Configuring NF Service Feature Config Set                                         | 101 |
| 4.2.37   | Circuit Breaking Configurations                                                   | 102 |
| 4.2.38   | Viewing SCP Feature Status                                                        | 102 |
| 4.2.39   | Get NF Discovery Response Cache Configuration Data                                | 103 |
| 4.2.40   | Configuring NF Profile Level Attribute                                            | 104 |
| 4.2.41   | Configuring NF Profile Level Attribute Configuration Data                         | 105 |
| 4.2.42   | Configuring NF Delegated Discovery Response Cache                                 | 106 |

## 5 Metrics

|     |                           |   |
|-----|---------------------------|---|
| 5.1 | SCP OCI Metrics Dashboard | 1 |
| 5.2 | Dimension Description     | 1 |

|       |                   |     |
|-------|-------------------|-----|
| 5.2.1 | Metrics           | 10  |
| 5.2.2 | Mediation Metrics | 127 |

## 6 Alerts

|        |                                                  |    |
|--------|--------------------------------------------------|----|
| 6.1    | Configuring Alerts                               | 2  |
| 6.2    | System level alerts                              | 2  |
| 6.2.1  | SCPNotificationPodMemoryUsage                    | 2  |
| 6.2.2  | SCPWorkerPodMemoryUsage                          | 3  |
| 6.2.3  | SCPInstanceDown                                  | 4  |
| 6.3    | Application level alerts                         | 5  |
| 6.3.1  | SCPCcaFeatureEnabledWithoutHttps                 | 5  |
| 6.3.2  | SCPIngressTrafficRateAboveMinorThreshold         | 6  |
| 6.3.3  | SCPIngressTrafficRateAboveMajorThreshold         | 6  |
| 6.3.4  | SCPIngressTrafficRateAboveCriticalThreshold      | 7  |
| 6.3.5  | SCPRoutingFailedForProducer                      | 8  |
| 6.3.6  | SCPAuditErrorResponse                            | 9  |
| 6.3.7  | SCPAuditEmptyNFArrayResponse                     | 10 |
| 6.3.8  | DuplicateLocalityFoundInForeignNF                | 11 |
| 6.3.9  | ForeignNFLocalityNotServed                       | 12 |
| 6.3.10 | UnknownLocalityFoundInForeignNF                  | 12 |
| 6.3.11 | SCPUpsstreamResponseTimeout                      | 13 |
| 6.3.12 | SCPSingleNfInstanceAvailableForNFType            | 13 |
| 6.3.13 | SCPNoNfInstanceForNFType                         | 14 |
| 6.3.14 | SCPIngressTrafficRateExceededConfiguredLimit     | 15 |
| 6.3.15 | SCPIngressTrafficRoutedWithoutRateLimitTreatment | 15 |
| 6.3.16 | SCPEgressTrafficRateExceededConfiguredLimit      | 16 |
| 6.3.17 | SCPEgressTrafficRoutedWithoutRateLimitTreatment  | 17 |
| 6.3.18 | SCPNotificationRejectTopologySourceLocal         | 18 |
| 6.3.19 | SCPNotificationProcessingFailureForNF            | 18 |
| 6.3.20 | SCPSubscriptionFailureForNFType                  | 20 |
| 6.3.21 | SCPReSubscriptionFailureForNFType                | 22 |
| 6.3.22 | SCPNrRegistrationFailureForRegionOrSetId         | 22 |
| 6.3.23 | SCPNrHeartbeatFailureForRegionOrSetId            | 24 |
| 6.3.24 | SCPDOOperationFailure                            | 24 |
| 6.3.25 | SCPGeneratedErrorsResponseForNFService           | 25 |
| 6.3.26 | SCPCircuitBreakingAppliedForNF                   | 25 |
| 6.3.27 | SCPUgradeStarted                                 | 26 |
| 6.3.28 | SCPUgradeFailed                                  | 26 |
| 6.3.29 | SCPUgradeSuccessful                              | 27 |
| 6.3.30 | SCPRollbackStarted                               | 27 |
| 6.3.31 | SCPRollbackFailed                                | 28 |



|        |                                                             |    |
|--------|-------------------------------------------------------------|----|
| 6.3.32 | SCPRollbackSuccessful                                       | 28 |
| 6.3.33 | ScpWorkerPodCpuUtilizationAboveWarnThreshold                | 29 |
| 6.3.34 | ScpWorkerPodCpuUtilizationAboveMinorThreshold               | 30 |
| 6.3.35 | ScpWorkerPodCpuUtilizationAboveMajorThreshold               | 30 |
| 6.3.36 | ScpWorkerPodCpuUtilizationAboveCriticalThreshold            | 31 |
| 6.3.37 | SCPUnhealthyPeerSCPDetected                                 | 32 |
| 6.3.38 | SCPDnsSrvQueryFailure                                       | 32 |
| 6.3.39 | SCPProducerOverloadThrottled                                | 33 |
| 6.3.40 | SCPProducerOverloadAlternateRouted                          | 34 |
| 6.3.41 | SCPSeppNotConfigured                                        | 34 |
| 6.3.42 | SCPSeppRoutingFailed                                        | 35 |
| 6.3.43 | SCPGlobalEgressRLRemoteParticipantConnectivityFailure       | 36 |
| 6.3.44 | SCPGlobalEgressRLRemoteParticipantWithDuplicateNFInstanceId | 37 |
| 6.3.45 | SCPMediationConnectivityFailure                             | 38 |
| 6.3.46 | SCPNotificationQueuesUtilizationAboveMinorThreshold         | 39 |
| 6.3.47 | SCPNotificationQueuesUtilizationAboveMajorThreshold         | 40 |
| 6.3.48 | SCPNotificationQueuesUtilizationAboveCriticalThreshold      | 41 |
| 6.3.49 | SCPnrfProxyQueuesUtilizationAboveMinorThreshold             | 41 |
| 6.3.50 | SCPnrfProxyQueuesUtilizationAboveMajorThreshold             | 42 |
| 6.3.51 | SCPnrfProxyQueuesUtilizationAboveCriticalThreshold          | 43 |
| 6.3.52 | SCPWorkerQueuesUtilizationAboveMinorThreshold               | 43 |
| 6.3.53 | SCPWorkerQueuesUtilizationAboveMajorThreshold               | 44 |
| 6.3.54 | SCPWorkerQueuesUtilizationAboveCriticalThreshold            | 45 |
| 6.3.55 | SCPCacheQueuesUtilizationAboveMinorThreshold                | 45 |
| 6.3.56 | SCPCacheQueuesUtilizationAboveMajorThreshold                | 46 |
| 6.3.57 | SCPCacheQueuesUtilizationAboveCriticalThreshold             | 47 |
| 6.3.58 | SCPLoadManagerQueuesUtilizationAboveMinorThreshold          | 47 |
| 6.3.59 | SCPLoadManagerQueuesUtilizationAboveMajorThreshold          | 48 |
| 6.3.60 | SCPLoadManagerQueuesUtilizationAboveCriticalThreshold       | 49 |
| 6.3.61 | SCPProducerNfSetUnhealthy                                   | 49 |
| 6.3.62 | SCPPeerSeppUnhealthy                                        | 50 |
| 6.3.63 | SCPMicroServiceUnreachable                                  | 51 |
| 6.3.64 | SCPTrafficFeedSendFailed                                    | 52 |
| 6.3.65 | SCPTrafficFeedKafkaClusterUnhealthy                         | 52 |
| 6.3.66 | SCPTrafficFeedPartitionUnhealthy                            | 53 |
| 6.3.67 | SCPServiceMeshFailure                                       | 53 |
| 6.3.68 | SCPHealthCheckFailedForPeerSCP                              | 54 |
| 6.3.69 | SCPHealthCheckFailed                                        | 54 |
| 6.3.70 | ScpWorkerPodPendingTransUtilizationAboveWarnThreshold       | 55 |
| 6.3.71 | ScpWorkerPodPendingTransUtilizationAboveMinorThreshold      | 55 |
| 6.3.72 | ScpWorkerPodPendingTransUtilizationAboveMajorThreshold      | 56 |
| 6.3.73 | ScpWorkerPodPendingTransUtilizationAboveCriticalThreshold   | 57 |

|         |                                                         |    |
|---------|---------------------------------------------------------|----|
| 6.3.74  | ScpWorkerPodResourceUtilizationAboveMinorThreshold      | 57 |
| 6.3.75  | ScpWorkerPodResourceUtilizationAboveMajorThreshold      | 58 |
| 6.3.76  | ScpWorkerPodResourceUtilizationAboveWarnThreshold       | 58 |
| 6.3.77  | ScpWorkerPodResourceUtilizationAboveCriticalThreshold   | 59 |
| 6.3.78  | SCPDNSSRVNRFMigrationTaskFailure                        | 60 |
| 6.3.79  | SCPDNSSRVNRFNonMigrationTaskFailure                     | 60 |
| 6.3.80  | SCPDNSSRVNRFDuplicateTargetDetected                     | 61 |
| 6.3.81  | SCPHighResponseTimeFromProducer                         | 61 |
| 6.3.82  | SCPCGroupVersionDetectionFailed                         | 62 |
| 6.3.83  | SCPCPUUsageFileReadFailed                               | 62 |
| 6.3.84  | SCPIgnoreUnknownService                                 | 63 |
| 6.3.85  | SCPWorkerSSLCertificateOnCriticalExpiry                 | 63 |
| 6.3.86  | SCPWorkerSSLCertificateOnMajorExpiry                    | 64 |
| 6.3.87  | SCPWorkerSSLCertificateOnMinorExpiry                    | 64 |
| 6.3.88  | SCPIngressConnectionEstablishmentFailure                | 65 |
| 6.3.89  | SCPEgressConnectionEstablishmentFailure                 | 65 |
| 6.3.90  | SCPNrfProxyOAuthQueuesUtilizationAboveMinorThreshold    | 66 |
| 6.3.91  | SCPNrfProxyOAuthQueuesUtilizationAboveMajorThreshold    | 66 |
| 6.3.92  | SCPNrfProxyOAuthQueuesUtilizationAboveCriticalThreshold | 67 |
| 6.3.93  | ScpSelfOCIThresholdAboveWarn                            | 67 |
| 6.3.94  | ScpSelfOCIThresholdAboveMinor                           | 68 |
| 6.3.95  | ScpSelfOCIThresholdAboveMajor                           | 68 |
| 6.3.96  | ScpSelfOCIThresholdAboveCritical                        | 69 |
| 6.3.97  | SCPWorkerSSLPartialSecret                               | 69 |
| 6.3.98  | SCPWorkerAndNFTimeSyncFailure                           | 70 |
| 6.3.99  | SCPCoherenceCacheHitsRateAboveThreshold                 | 70 |
| 6.3.100 | SCPNotificationRequestsRateAboveThreshold               | 71 |
| 6.3.101 | SCPLciRxRateAboveThreshold                              | 72 |
| 6.3.102 | SCPOciRxRateAboveThreshold                              | 72 |
| 6.3.103 | SCPTrafficRateAboveRatedThreshold                       | 73 |
| 6.3.104 | SCPMaxNFProfilesLimitExceeded                           | 73 |
| 6.4     | Mediation Alerts                                        | 74 |
| 6.4.1   | NFMediationUserDefinedVariablesMaxSizeLimitExceeded     | 74 |

## 7 KPIs and Traces

|       |                            |    |
|-------|----------------------------|----|
| 7.1   | Key Performance Indicators | 1  |
| 7.1.1 | Platform KPIs              | 1  |
| 7.1.2 | Application KPIs           | 3  |
| 7.1.3 | Feature KPIs               | 5  |
| 7.2   | Traces                     | 10 |

## 8 SCP Interactions with NRF

---

## 9 Supported Query Parameters

---

## 10 Supported NF Types and Services

---

## 11 Supported 3GPP Headers

---

## A HTTP Status Codes and Applicability for Rerouting

---

## B Error Codes Generated by SCP

---

# Preface

- [Documentation Accessibility](#)
- [Diversity and Inclusion](#)
- [Conventions](#)

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

## Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

## Conventions

The following text conventions are used in this document:

| Convention      | Meaning                                                                                                                                |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>boldface</b> | Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.         |
| <i>italic</i>   | Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.                          |
| monospace       | Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter. |

# My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

- For Technical issues such as creating a new Service Request (SR), select **1**.
- For Non-technical issues such as registration or assistance with My Oracle Support, select **2**.
- For Hardware, Networking and Solaris Operating System Support, select **3**.

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

# Acronyms

The following table provides information about the acronyms and the terminology used in the document.

**Table 1 Acronyms**

| Acronym     | Description                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------|
| 0-RTT       | Zero Round Trip Time                                                                                                                     |
| 3GPP        | 3rd Generation Partnership Project                                                                                                       |
| 5GC         | 5G Core Network                                                                                                                          |
| 5GS         | 5G System                                                                                                                                |
| AEAD        | Authenticated Encryption with Associated Data                                                                                            |
| AF          | Application Function                                                                                                                     |
| API         | Application Programming Interface                                                                                                        |
| AUSF        | Authentication Server Function                                                                                                           |
| CCA         | Client Credentials Assertion, 3gpp-Sbi-Client-Credentials header is defined by 3GPP. The header contains a client credentials assertion. |
| CNC Console | Oracle Communications Cloud Native Configuration Console                                                                                 |
| CNE         | Oracle Communications Cloud Native Core, Cloud Native Environment                                                                        |
| CNI         | Container Network Interface                                                                                                              |
| CNLB        | Cloud Native Load Balancer                                                                                                               |
| CRD         | Custom Resource Definition                                                                                                               |
| DNS         | Domain Name System                                                                                                                       |
| FQDN        | Fully Qualified Domain Name                                                                                                              |
| GPSI        | Generic Public Subscription Identifier                                                                                                   |
| HPLMN       | Home Public Land Mobile Network                                                                                                          |
| HR          | Home Routing                                                                                                                             |
| HTTP        | Hypertext Transfer Protocol                                                                                                              |
| HTTPS       | Hypertext Transfer Protocol Secure                                                                                                       |
| IMSI        | International Mobile Subscriber Identity                                                                                                 |
| IWF         | InterWorking and Mediation Function                                                                                                      |
| K8s         | Kubernetes                                                                                                                               |
| LBVM        | Load Balancer Virtual Machine                                                                                                            |
| LBO         | Local Breakout                                                                                                                           |
| LCM         | Lifecycle Management                                                                                                                     |
| MAC         | Message Authentication Code                                                                                                              |
| MCC         | Mobile Country Code                                                                                                                      |
| MNC         | Mobile Network Code                                                                                                                      |
| MSISDN      | Mobile Station International Subscriber Directory Number                                                                                 |
| NAD         | Network Attachment Definition                                                                                                            |
| NF          | Network Function                                                                                                                         |
| NRF         | Oracle Communications Cloud Native Core, Network Repository Function                                                                     |
| NTP         | Network Time Protocol                                                                                                                    |

**Table 1 (Cont.) Acronyms**

| Acronym | Description                                                                           |
|---------|---------------------------------------------------------------------------------------|
| OAM     | Operations, Administration, and Maintenance                                           |
| OCCM    | Oracle Communications Cloud Native Core, Certificate Management                       |
| OCI     | Oracle Cloud Infrastructure                                                           |
| OCNADD  | Oracle Communications Network Analytics Data Director                                 |
| PFS     | Provide Forward Secrecy                                                               |
| PLMN    | Public Land Mobile Network                                                            |
| PSK     | Pre-Shared Keys                                                                       |
| QoS     | Quality of Service                                                                    |
| RTT     | Round Trip Time                                                                       |
| SASL    | Simple Authentication and Security Layer                                              |
| SBA     | Service Based Architecture                                                            |
| SBI     | Service Based Interface                                                               |
| SCP     | Oracle Communications Cloud Native Core, Service Communication Proxy                  |
| SCPC    | Service Communication Proxy Control                                                   |
| SEPP    | Oracle Communications Cloud Native Core, Security Edge Protection Proxy               |
| SMF     | Session Management Function                                                           |
| SPN     | Service Proto Name                                                                    |
| SSL     | Secure Sockets Layer                                                                  |
| SUPI    | Subscription Permanent Identifier                                                     |
| SRV     | Service                                                                               |
| TLS     | Transport Layer Security                                                              |
| UDR     | Oracle Communications Cloud Native Core, Unified Data Repository                      |
| UDSF    | Unstructured Data Storage Function                                                    |
| URI     | Uniform Resource Identifier                                                           |
| UDM     | Unified Data Management                                                               |
| VPLMN   | Visited Public Land Mobile Network                                                    |
| XFCC    | x-forwarded-client-cert is a proxy header that indicates TLS certificate information. |
| LCI     | Load Control Information                                                              |
| LC-H    | Load Control based on LCI Header                                                      |
| OCI     | Overload Control Information                                                          |
| OLC-H   | Overload Control based on OCI Header                                                  |
| UDV     | User Defined Variables                                                                |

# What's New in This Guide

This section introduces the documentation updates for release 25.2.1xx.

## Release 25.2.100 - G41309-01, October 2025

### Feature Updates

- New Features:
  - Updated the following sections for the Routing Options Enhancement for Notification Messages feature:
    - \* Added the [Routing Options Enhancement for Notification Messages](#) section to describe how SCP has enhanced its routing options configuration with new parameters to identify consumer NFs and services.
    - \* Updated the [Configuring Routing Options](#) section with **Service Operation** and **API Name Ax Heading** fields to configure service and operation types of consumer NFs.
    - \* Updated the [Configuring NFTypes-NFServices](#) section with the **API Name Ax Heading** field to configure service type of consumer NFs.
  - Added the [LCM Automation](#) section to describe optimization of deployment and upgrade processes of SCP by automating service account creation.
  - Added the [TLS 1.3 Support for Kubernetes API](#) section to describe TLS 1.3 support for the Kubernetes API server.
- Enhancements:

There are no new enhancements done in this release.

### General Updates

- The consumerNFType REST API parameter is renamed to senderNFType in the [Support for 3GPP Defined NFs, Custom NFs, and Custom NF Services](#) section.
- Added the following metrics in the [Metrics](#) section:
  - ocscp\_notification\_db\_read\_time\_total
  - ocscp\_audit\_completion\_time\_total
- Added the following alerts:
  - [SCPMaxNFProfilesLimitExceeded](#)
  - [SCPCoherenceCacheHitsRateAboveThreshold](#)
  - [SCPNotificationRequestsRateAboveThreshold](#)
  - [SCPOciRxRateAboveThreshold](#)
  - [SCPLciRxRateAboveThreshold](#)
  - [SCPTrafficRateAboveRatedThreshold](#)
- Renamed the ocscp\_notification\_duplicate\_profile\_ignored\_total metric to ocscp\_notification\_profile\_ignored\_total in the [Metrics](#) section.
- Added the following event IDs in the [Verbose Logging for SCP](#) section:
  - RESPONSE\_TIMEOUT
  - OCI\_HEADER\_VALIDATION



- OPTIONAL\_CACHING\_MODEL\_ERROR
- NF\_PROFILE\_IGNORED
- TASK\_SCHEDULE\_FAILURE
- The OIDs of the following alerts have been updated:
  - SCPNotificationQueuesUtilizationAboveMinorThreshold
  - SCPNotificationQueuesUtilizationAboveMajorThreshold
  - SCPNotificationQueuesUtilizationAboveCriticalThreshold
  - SCPNrfProxyQueuesUtilizationAboveMinorThreshold
  - SCPNrfProxyQueuesUtilizationAboveMajorThreshold
  - SCPNrfProxyQueuesUtilizationAboveCriticalThreshold
  - SCPWorkerQueuesUtilizationAboveMinorThreshold
  - SCPWorkerQueuesUtilizationAboveMajorThreshold
  - SCPWorkerQueuesUtilizationAboveCriticalThreshold
  - ScpWorkerPodPendingTransUtilizationAboveWarnThreshold
  - ScpWorkerPodPendingTransUtilizationAboveMinorThreshold
  - ScpWorkerPodPendingTransUtilizationAboveMajorThreshold
  - ScpWorkerPodPendingTransUtilizationAboveCriticalThreshold
  - ScpWorkerPodResourceUtilizationAboveWarnThreshold
  - ScpWorkerPodResourceUtilizationAboveMinorThreshold
  - ScpWorkerPodResourceUtilizationAboveMajorThreshold
  - ScpWorkerPodResourceUtilizationAboveCriticalThreshold
  - SCPCacheQueuesUtilizationAboveMinorThreshold
  - SCPCacheQueuesUtilizationAboveMajorThreshold
  - SCPCacheQueuesUtilizationAboveCriticalThreshold
  - SCPLoadManagerQueuesUtilizationAboveMinorThreshold
  - SCPLoadManagerQueuesUtilizationAboveMajorThreshold
  - SCPLoadManagerQueuesUtilizationAboveCriticalThreshold
  - SCPNrfProxyOAuthQueuesUtilizationAboveMinorThreshold
  - SCPNrfProxyOAuthQueuesUtilizationAboveMajorThreshold
  - SCPNrfProxyOAuthQueuesUtilizationAboveCriticalThreshold
- The `ocscp_metric_coherence_request_processing_time_total` metric is removed from the [Metrics](#) section.
- Moved the "Configuring Alerts" and "Configuring SCP Alerts for OCI" sections to *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.
- Added the [Configuring Alerts](#) section to refer to *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide* for configuring the alerts.

# 1

## Introduction


This document provides information about how to use Oracle Communications Cloud Native Core, Service Communication Proxy (SCP) in the cloud native 5G core network.

SCP installation is supported over the following platforms:

- Oracle Communications Cloud Native Core, Cloud Native Environment (CNE)
- Oracle Cloud Infrastructure (OCI)  
For more information, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

SCP is a 3GPP-defined network entity that works as an HTTP/HTTPS proxy in the 5G SBA control plane. 5G NFs communicate indirectly via the SCP in the indirect communication models.

**Figure 1-1 Service Based Architecture (SBA) for 5G Core**

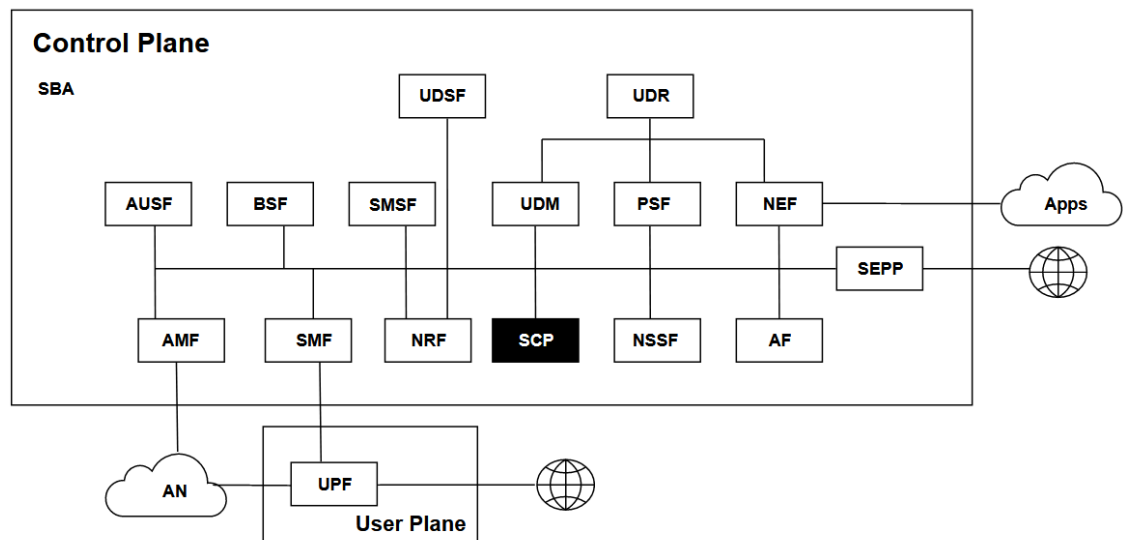

The core network in 5G follows a service-based architecture, where network functions provide services that can be utilized using REST APIs by other functions. This allows the adoption of web-scale technologies and software that are used by different organizations in the telecommunications network.

SCP provides the following functionalities in the 5G core:

- **Routing/Selection:** Routing rules, refresh cache, and handle application failures and redirects.
  - **Dynamic Discovery:** The 5G topology is learned from Network Repository Function (NRF) and routing rules are created automatically based on the learned NF profiles.
  - **Static Configuration:** SCP allows the configuration of NF profiles.

- **Load Balancing:** Load balancing based on NF set, priority, and capacity published in the NF profile.
- **NF Subscription:** Subscription for all NF types to learn the network topology.
- **Circuit Breaking:** Pro-active method to detect the degraded producer NF instances in the network. Implemented on a per FQDN basis when outstanding transactions exceed a configurable value.
- **Message Priority:** Message Priority assignment and override based on the 3GPP-SBI-Message-Priority header.
- **Congestion Control:** Congestion control for producer NF instances based on their published NF load.
- **Overload Control:** Avoids SCP failures by providing overload control for SCP-worker pods based on CPU usage. Uniform load balancing and routing strategy across the network and protects the pod from overload related to various system resources.

### SCP Availability

Oracle Communications Cloud Native Core, Service Communication Proxy (SCP) availability depends on many factors. SCP applications are designed to achieve 99.999% availability according to the applicable Telecommunications Industry Association TL9000 standards with the following deployment requirements:

- Deploy on a Cloud Native Environment with at least 99.999% availability.
- Deploy with  $n + k$  (up to 2) application redundancy, where  $k$  is greater than or equal to one.
- Maintain production software within  $n-3$  software releases, where  $n$  is the current general availability release.
- Apply bug fixes, critical patches, and configuration recommendations provided by Oracle promptly.
- Maintain fault recovery procedures external to the applications for the reconstruction of lost or altered files, data, programs, or Cloud Native environment.
- Install, configure, operate, and maintain SCP as per Oracle's applicable installation, operation, administration, and maintenance specifications.
- Maintain an active support contract and provide access to the deployed SCP and your personnel to assist Oracle in addressing any outage.

#### Note

The performance and capacity of the SCP system may vary based on the call model, feature or interface configuration, network conditions, and underlying CNE and hardware environment.

SCP availability is measured for each calendar year and is calculated as follows:

**Table 1-1 Measuring SCP Availability**

| Availability                        | Description                                                                                        |
|-------------------------------------|----------------------------------------------------------------------------------------------------|
| <b>Planned Product Availability</b> | (Product available time in each month) less ( <b>Excluded Time</b> (defined below) in each month). |

Table 1-1 (Cont.) Measuring SCP Availability

| Availability                       | Description                                                                                                                                 |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Actual Product Availability</b> | (Planned Product Availability) less (any Unscheduled Outage)                                                                                |
| <b>Product Availability Level</b>  | (Actual Product Availability across all Production instances divided by Planned Product Availability across all Production instances) x 100 |

**Note****Excluded Time** means:

- Scheduled maintenance time.
- Lack of power or backhaul connectivity, except to the extent that such lack of backhaul connectivity was caused directly by the CNC NF.
- Hardware failure.
- Issues arising out of configuration errors or omissions.
- Failures caused by third-party equipment or software not provided by Oracle.
- Occurrence of any event under Force Majeure.
- Any time associated with failure to maintain the recommended architecture and redundancy model requirements above.

## 1.1 References

- *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*
- *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*
- *Oracle Communications Cloud Native Core Automated Testing Suite Guide*
- *Oracle Communications Cloud Native Configuration Console Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Network Repository Function User Guide*
- *Oracle Communications Cloud Native Core, Network Repository Function Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Cloud Native Environment User Guide*
- *Oracle Communications Network Analytics Data Director User Guide*
- *Oracle Communications Cloud Native Core, Certificate Management Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Certificate Management User Guide*
- *Oracle Communications Cloud Native Core, OCI Deployment Guide*

- <https://github.com/k8snetworkplumbingwg/multus-cni>.


# 2

## Service Communication Proxy Architecture

This section explains the Oracle Communications Cloud Native Core, Service Communication Proxy (SCP) system architecture.

SCP is a decentralized solution composed of control plane and data plane. This solution is deployed with 5G Network Functions (NFs) for providing routing control, resiliency, and observability to the core network.

**Figure 2-1 Service Communication Proxy Architecture**

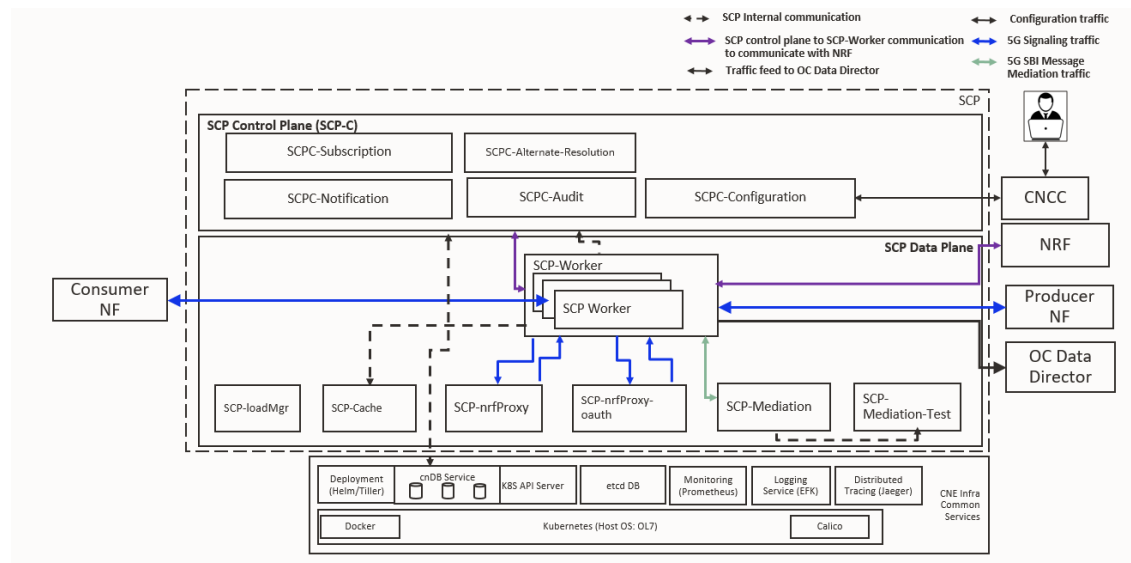

The SCP solution is deployed either as a default outbound proxy to NF instances or as a router model, where SCP is configured as HTTP2 outbound proxy at each NF in cloud native environments.

### SCP Microservices

The list of SCP microservices is as follows:

**Table 2-1 SCP Microservices**

| Microservices     | Description                                                                                                                                                                                                                                                                                                                          |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCPC-Notification | It configures routing rules as per 5G NF topology information obtained from NRF, or as result of audit. It tracks the 5G NF topology for any change and updates in the route rules or configuration. It translates the topology into low-level SCP-Worker configuration and provides the configuration to the Worker when requested. |

Table 2-1 (Cont.) SCP Microservices

| Microservices             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCPC-Audit                | It performs periodic audit with NRF to synchronize the 5G NF topology information and updates routing rules through notifications if required.                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| SCPC-Configuration        | It provides an interface for SCP configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| SCPC-Subscription         | It performs NRF management and NRF discovery service operation for SCP registration and subscription for NF change notification.                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| SCPC-Alternate-Resolution | It finds an alternate NF service by performing DNS SRV queries with the DNS server and receives the DNS SRV responses. <ul style="list-style-type: none"> <li>Refreshes DNS SRV records to get update in DNS SRV records.</li> <li>Provides DNS SRV records to scp-worker when required.</li> </ul>                                                                                                                                                                                                                                                                                       |
| SCP-Worker                | It receives 5G signaling traffic and controls communication and routing among 5G NFs and services. <ul style="list-style-type: none"> <li>5G NF selection for routing and rerouting across available 5G NFs</li> <li>Endpoint selection based on NF profile information registered with NRF</li> <li>Congestion control and traffic throttling using Ingress and Egress</li> <li>Load balancing and overload control</li> <li>5G SBI message priority assignment</li> <li>5G SBI Mediation</li> <li>5G Observability data</li> </ul>                                                      |
| SCP-NrfProxy              | It operates as an intermediate proxy between SCP-Worker and NRF for NF Discovery service requests originated by SCP. <ul style="list-style-type: none"> <li>It stores NF Discovery responses received from NRF through SCP-Worker.</li> <li>It receives NF Discovery requests, along with query parameters from SCP-Worker, and forwards the created NF Discover requests to NRF through SCP-Worker. After receiving the NF Discovery responses from NRF through SCP-Worker, the nrfproxy service sends the response to SCP-Worker and stores the response for subsequent use.</li> </ul> |
| SCP-Cache                 | It maintains the present status of ingress and egress traffic rate limiting and serves to the SCP-Worker microservice by storing the keys of rate limiting when required.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SCP-Mediation             | It allows the modification of 5G SBI message content such as HTTP2 header values or JSON message body or the both, based on user-defined mediation rule sets to solve any inter-op issues. It applies user configured message mediation policy rules on ingress 5G SBI messages to execute message mediation transformation.                                                                                                                                                                                                                                                              |
| SCP-Mediation-Test        | It enables to test the user configured message mediation policy test rules on ingress 5G SBI messages without actual execution on messages and mediation transformation.                                                                                                                                                                                                                                                                                                                                                                                                                  |

Table 2-1 (Cont.) SCP Microservices

| Microservices      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCP-LoadManager    | It manages the load and overload control information of peer NFs and SCPs on its own. It determines the latest load information from NRF or the LCI header using timestamp and shares the updated information with SCP-Worker pods using distributed cache. SCP-Worker pods process the received LCI information, update the routing rules, and use it for 5G SBI request routing and selection.                                                                                                                                |
| SCP-NrfProxy-Oauth | It is an intermediary proxy between SCP-Worker and NRF for processing OAuth2.0 access token service requests. It caches the OAuth2.0 access token received from NRF through SCP-Worker. It receives the OAuth2.0 access token request from SCP-Worker and forwards the created OAuth2.0 access token service request to NRF through SCP-Worker. After receiving the OAuth2.0 access token response from NRF through SCP-Worker, SCP-nrfProxy-Oauth sends the response to SCP-Worker and caches the response for subsequent use. |


### Ingress and Egress Gateway Traffic Management

For more information about Ingress and Egress Gateway Traffic Management, see *Oracle Communications Cloud Native Core, Cloud Native Environment User Guide*.

## 2.1 5G SBI Message Processing and Trigger Points

The following image represents how SCP processes ingress 5G SBI message requests from consumer NFs.

Figure 2-2 5G SBI Message Processing and Trigger Points

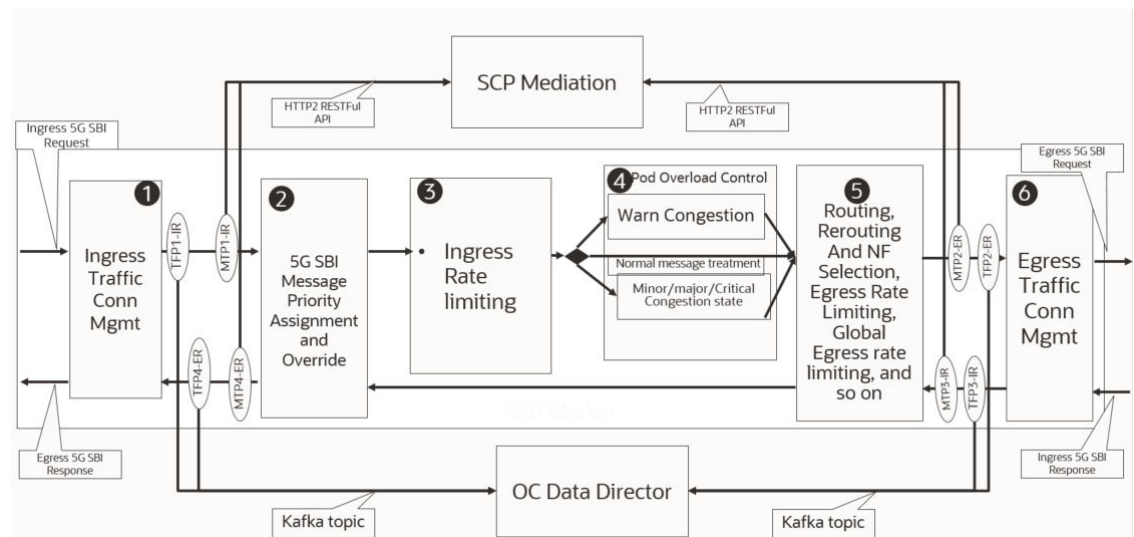



# 3

## Service Communication Proxy Features

This chapter describes the features of Oracle Communications Cloud Native Core, Service Communication Proxy (SCP).

### Note

The performance and capacity of the SCP system may vary based on the call model, feature or interface configuration, network conditions, and underlying CNE and hardware environment.

## 3.1 Routing Options Enhancement

This section provides information about routing options enhancements for SBI messages, notification, and next hop SCP.

### 3.1.1 Support for Default Notification Message Routing

During NF profile registration or update, NF has the ability to publish the Notification URI for default notifications. This is crucial due to the expected default Subscriptions in NF profiles. SCP plays a vital role in this process by creating routing rules for the purpose of routing 5G SBI messages. SCP achieves this by obtaining knowledge of the 5G topology from the NRF through NF status notifications. Previously, the SCP's topology learning did not include the default notification callback URI information published in the defaultNotificationSubscription attribute of the NF profile. Consequently, SCP remained unaware of these default notification callback URIs and was unable to do alternate routing of received default notification messages.

SCP has now significantly improved its topology learning process by incorporating the default notification URI and endpoint from both the NF profile and NF service level. As a result, SCP is now fully informed about these default notification callback URIs and possesses the capability to efficiently do routing and alternate routing of received default notification messages.

#### Managing Default Notification Message Routing

##### Enable

This feature is enabled by default in SCP at the time of deployment.

##### Configure

You can view or edit the default notification message subscription feature using the CNC Console. For information about this feature, see "Viewing or Editing the Default Notification Subscriptions section" in [Configuring NF Rule Profile](#) to view the default notification message subscriptions that are present under NF service level or NF profile level.

##### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

### 3.1.1.1 Default Notification Routing Behavior at SCP

The expected behavior at SCP based on the presence of various headers is as follows:

**Table 3-1 Default Notification Routing Behavior**

| Pseudo Header                 | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                         |
|-------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                |
| "/scp-default-sub-notify-uri" | Absent                         | Present                  | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | NA                              | SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type.<br><b>Note:</b> Only apiversion is considered from 3gpp-Sbi-Callback. |
| "/scp-default-sub-notify-uri" | Absent                         | Present                  | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | NA                              | 400 Bad request cause: query parameter missing (TS29.500)                                                                                                                                        |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                 | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                             |
| "/scp-default-sub-notify-uri" | Absent                         | Absent                   | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | NA                              | <p>SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type at the NF profile level defaultnotification/subscription parameters.</p> <p>This is the default notification due to the presence of the 3gpp-Sbi-Discovery-notification-type header. apiversion =1</p> <p><b>Note:</b> Only apiversion is considered from 3gpp-Sbi-Callback.</p> |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                     | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                            |
|-----------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                           | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                   |
|                                   |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | If not, the apiversion will be assumed to be 1.                                                                                                                                                     |
| "/scp-default-sub-notify-uri"     | Absent                         | Absent                   | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | NA                              | 400 Bad request cause: query parameter is missing (TS29.500)                                                                                                                                        |
| non "/scp-default-sub-notify-uri" | Absent                         | Present                  | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Absent                          | SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type. SCP modifies the :path header as per the selected notification endpoint. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                       | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                             | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                  |
| non "/" scp-default-sub-notify-uri" | Absent                         | Present                  | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Absent                          | <p>Selection of NF is dependent on the discovery response. The path will remain the same as it was when the consumer made their original request. Furthermore, the notification processing is non-default. For example, explicit notification since 3gpp-Sbi-Callback header is present.</p> <p><b>Note:</b> The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the</p> |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                 |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                        |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | typical rule match.<br>For more information, see Note at the bottom of this table if the notification message is without a service name. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                       | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                              |
|-------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                             | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                     |
| non "/" scp-default-sub-notify-uri" | Absent                         | Absent                   | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Absent                          | SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type at the NF profile level defaultnotification/subscription parameters. This is the default notification due to the presence of the 3gpp-Sbi-Discovery-notification-type header. apiversion =1 |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                       | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                             | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| non "/" scp-default-sub-notify-uri" | Absent                         | Absent                   | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Absent                          | <p>Selection of NF is dependent on the discovery response. The path will remain the same as it was when the consumer made their original request. Moreover, non-default notification processing, normal discovery, and NF selection processing is applied.</p> <p><b>Note:</b> The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match.</p> <p>For more information, see Note at</p> |



Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                       | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                           |
|-------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                             | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                  |
|                                     |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | the bottom of this table if the notification message is without a service name.                                                    |
| non "/" scp-default-sub-notify-uri" | Absent                         | Present                  | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Present                         | SCP does callback URI selection based on 3gpp-Sbi-Routing-Binding header information along with other received header information. |
| non "/" scp-default-sub-notify-uri" | Absent                         | Present                  | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Present                         | NF selection is based on 3gpp-Sbi-Routing-Binding header information along with other received header information.                 |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                       | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                           |
|-------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                             | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                  |
| non "/" scp-default-sub-notify-uri" | Absent                         | Absent                   | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Present                         | SCP does callback URI selection based on 3gpp-Sbi-Routing-Binding header information along with other received header information. |
| non "/" scp-default-sub-notify-uri" | Absent                         | Absent                   | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Present                         | NF selection is based on 3gpp-Sbi-Routing-Binding header information along with other received header information.                 |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                 | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                       |
|-------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                              |
| "/scp-default-sub-notify-uri" | Present                        | Present                  | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | NA                              | First Attempt: Normal route to the selected producer with the received :path header.<br>Alternate Attempt: SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type. SCP modifies the :path header as per the selected notification endpoint. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                 | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "/scp-default-sub-notify-uri" | Present                        | Present                  | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | NA                              | <p>First Attempt: Normal route to the selected producer with the received :path header.</p> <p>Alternate Attempt: Non-default notification processing , normal discovery, and NF selection processing</p> <p><b>Note:</b> The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match.</p> <p>For more information, see Note at the bottom of this table if the notification</p> |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                 | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                      |
|-------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                             |
|                               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | message is without a service name                                                                                                                                                                                                                                                                             |
| "/scp-default-sub-notify-uri" | Present                        | Absent                   | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | NA                              | First Attempt: Normal route to the selected producer with the received :path header.<br>Alternate Attempt: SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type. SCP modifies the :path header as per the selected notification endpoint |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                 | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| "/scp-default-sub-notify-uri" | Present                        | Absent                   | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | NA                              | <p>First Attempt: Normal route to the selected producer with the received :path header.</p> <p>Alternate Attempt: Non-default notification processing , normal discovery, and NF selection processing</p> <p><b>Note:</b> The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match.</p> <p>For more information, see Note at the bottom of this table if the notification</p> |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP           |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                  |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | message is without a service name. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                                                      | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                                                            | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                |
| non "/" scp-default-sub-notify-uri"i.e., notification/callback URI | Present                        | Present                  | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Absent                          | Model C Default notification processing with selected notification endpoint. First Attempt: Normal route to the selected producer with the received :path header. Alternate route: SCP performs the discovery and gets the callback URI from the selected consumer's profile for the given notification type and apiversion in the callback header. SCP modifies |



Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                    |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|-------------------------------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                           |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | the :path header as per the selected notification endpoint. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                                                                   | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                                                                         | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| non "/"<br>scp-default-sub-notify-uri"i.e.,<br>notification/<br>callback<br>URI | Present                        | Present                  | Absent                                                 | Present                                  | Present                                     | Optional<br>(don't<br>care)            | Optional<br>(don't<br>care)             | Optional<br>(don't<br>care) | Absent                          | Explicit notification processing<br><br>The first routing is based on the 3gpp-target-apiRoot header.<br><br>Alternate routing is based on normal discovery and NF selection processing, as applicable.<br><b>Note:</b> The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match.<br><br>For more information, see Note at the bottom of this table if the notification message |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP   |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|----------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                          |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | is without a service name. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                                                                   | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                                                                         | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                             |
| non "/"<br>scp-default-sub-notify-uri"i.e.,<br>notification/<br>callback<br>URI | Present                        | Absent                   | Present                                                | Present                                  | Present                                     | Optional<br>(don't care)               | Optional<br>(don't care)                | Optional<br>(don't care)    | Absent                          | Model C Default notification processing with selected notification endpoint.<br><br>First Attempt: Normal route to the selected producer with the received :path header.<br><br>Alternate route: SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type at the NF profile level defaultnotification/subscription parameter |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                  |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                         |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | <p>s. In the absence of a callback header, apiversion =1 is considered.</p> <p>This is the default notification due to the presence of the 3gpp-Sbi-Discovery-notification-type header. apiversion =1</p> |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                                                     | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                                                           | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| non "/" scp-default-sub-notify-uri"i.e., notification/callback UR | Present                        | Absent                   | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Absent                          | <p>Non Default notification processing</p> <p>The first routing is based on the 3gpp-target-apiRoot header.</p> <p>Alternate routing is based on normal discovery and NF selection processing , as applicable.</p> <p><b>Note:</b> The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match.</p> <p>For more information, see Note at the bottom of this table if the notification</p> |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP           |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                  |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | message is without a service name. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                                                       | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                                                             | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                        |
| non "/" scp-default-sub-notify-uri" i.e., notification/callback URI | Present                        | Present                  | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Present                         | Model C Default notification processing with selected notification endpoint.<br><br>First Attempt: Normal route to the selected producer with the received :path header.<br><br>Alternate route: SCP does callback uri selection based on 3gpp-Sbi-Routing-Binding header information along with other received header information. SCP gets the callback URI from the selected consumer |



Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | <p>'s profile for the given notification type and a version in the callback header. SCP modifies the :path header as per the selected notification endpoint.</p> <p><b>Note:</b></p> <ol style="list-style-type: none"> <li>1. If servName is present in the 3gpp-sbi-Routing-binding header, then SCP gets the callback URI from the selected consumer's profile for the given notification type for that service name.</li> <li>2. If servName</li> </ol> |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                            |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                   |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | is absent in the 3gpp-sbi-Routing-binding header, then SCP gets the callback URI from the selected consumer's profile for the given notification type from service level. If it is not found at the service level, it gets the callback URI from the profile level. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                                                                 | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                                                                       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| non "/"<br>scp-default-sub-notify-uri"<br>i.e., notification/<br>callback URI | Present                        | Present                  | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Present                         | Explicit notification processing<br>The first routing is based on the 3gpp-target-apiRoot header.<br>Alternate routing is based on 3gpp-Sbi-Routing-Binding header information along with other received header information and NF selection processing as applicable.<br><b>Note:</b> The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match.<br>For more information |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                     |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                            |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | n, see Note at the bottom of this table if the notification message is without a service name.<br>Note: Alternate routing is only performed when servName is present in the 3gpp-sbi-Routing-binding header. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                                                       | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                                                             | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                  |
| non "/" scp-default-sub-notify-uri" i.e., notification/callback URI | Present                        | Absent                   | Present                                                | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Present                         | Model C Default notification processing with selected notification endpoint.<br><br>First Attempt: Normal route to the selected producer with the received :path header.<br><br>Alternate route: SCP does callback uri selection based on 3gpp-Sbi-Routing-Binding header info along with other received header info. SCP gets the callback URI from the selected producer's profile for the given |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                   |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | <p>notification type at the NF profile level defaultnotification/subscription parameters. In the absence of a callback header, apiversion =1 will be considered.</p> <p>This is the default notification due to the presence of the 3gpp-Sbi-Discovery-notification-type header. apiversion =1</p> <p><b>Note:</b><br/>If servName is absent in the 3gpp-sbi-Routing-binding header, then SCP gets the callback</p> |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                              |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                     |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | URI from the selected consumer's profile for the given notification type from service level. If it is not found at the service level, it gets the callbackURI from the profile level. |

Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header                                                       | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"                                                             | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| non "/" scp-default-sub-notify-uri" i.e., notification/callback URI | Present                        | Absent                   | Absent                                                 | Present                                  | Present                                     | Optional (don't care)                  | Optional (don't care)                   | Optional (don't care)       | Present                         | <p>Non-default notification processing</p> <p>The first routing is based on the 3GPP-target-apiRoot header.</p> <p>Alternate routing is based on 3gpp-Sbi-Routing-Binding header information along with other received header information and NF selection processing as applicable.</p> <p><b>Note:</b> The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match.</p> |



Table 3-1 (Cont.) Default Notification Routing Behavior

| Pseudo Header | 3GPP 5G SBI Custom Header      |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | Expected Behavior at SCP                                                                                                                                                                                                                              |
|---------------|--------------------------------|--------------------------|--------------------------------------------------------|------------------------------------------|---------------------------------------------|----------------------------------------|-----------------------------------------|-----------------------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ":path"       | 3gpp-sbi-target-apiRoot Header | 3gpp-Sbi-Callback Header | 3gpp-Sbi-Discovery-notification-type(Mandatory) Header | 3gpp-Sbi-Discovery-target-nf-type Header | 3gpp-Sbi-Discovery-requester-nf-type Header | 3gpp-Sbi-Discovery-n1-msg-class Header | 3gpp-Sbi-Discovery-n2-info-class Header | 3gpp-Sbi-Discovery-* Header | 3gpp-sbi-Routing-binding Header | -                                                                                                                                                                                                                                                     |
|               |                                |                          |                                                        |                                          |                                             |                                        |                                         |                             |                                 | <p>For more information, see Note at the bottom of this table if the notification message is without a service name.</p> <p><b>Note:</b> Alternate Routing is only performed in case when servName is present in 3gpp-sbi-Routing-binding header.</p> |

**Note**

SCP behavior for Notification message without service name is as follows:

- SCP does the rule match or delegated discovery based on available information from the service request.
- SCP selects profile level FQDN for routing.
- SCP uses 80 as the default port for routing.
- SCP uses "http" as the default port for routing.

### 3.1.2 Routing Options Enhancement for Notification Messages

In SCP 25.1.200 and earlier releases, a generic routing options configuration was available to match the values of configured routing option parameters with the corresponding header attributes of ingress message requests or notification messages. This generic matching process was used to identify the most suitable routing option for forwarding the notification message.

From SCP 25.2.100, SCP enhances its routing options configuration to identify the consumer NF type and services to apply routing options. SCP creates routing rules to route ingress message requests or notifications from consumer NFs to producer NFs. The Routing Options REST API uses the following parameters to provide match criteria for selecting a routing option:

- `messageType`
- `notificationType`
- `nfType`
- `nfServiceName`
- `method`
- `apiSpecificResourceUri`
- `senderNFType`
- `notificationSender`

SCP-Worker matches the parameters configured through the Routing Options Config REST API with the consumer and producer NF details obtained from the ingress message request headers, such as `3gpp-Sbi-Callback`, `User-Agent`, `XFCC`, `3gpp-Sbi-Target-apiRoot`, and so on, to determine the best matched routing options.

SCP uses `senderNFType` and `notificationSender` to identify the consumer NF and the API (service operation) that sends notifications. SCP then applies the configured routing option based on the identified notification message sender.

`senderNFType` identifies the consumer NF type by matching the configured NF type with values extracted from `XFCC`, `User-Agent`, or `3gpp-sbi-callback` headers in the ingress message request. If `senderNFType` is not set to any specific value or NF type, `""` can be configured to accept any value during the routing option matching. Ensure that any NF type configured for `senderNFType` is also listed as one of the values for the `nfType` parameter in the `NFTypes-NFServices` REST API.

`notificationSender` specifies the details of the notification sender and is used to identify the API sending the notification. It matches the configured values of `apiNameAxHeading` and `serviceOperation` with the values in the `3gpp-Sbi-Callback` header to identify the consumer NF service and operation types. To configure `notificationSender` in the Routing Options REST API, you must register `apiNameAxHeading` with `NFTypes-NFServices` REST API using the PUT operation. After the registration is done, the service type of the consumer NF can be configured using the registered `apiNameAxHeading`.

For more information about `senderNFType` and `notificationSender` parameters, see the "Configuring Routing Options Config" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

**Matching Notification Message Header Attributes with Routing Options Config Parameters Configured at SCP**

This subsection explains how the parameters configured through the Routing Options Config REST API in SCP are matched with corresponding header attributes from notification messages to determine the best routing option match.

Sample header attributes obtained from a notification message:

```
3gpp-Sbi-Callback=Nudm_UECM_Update,
User-Agent=UDM-udm1svc.scpsvc.svc.cluster.local,
3gpp-Sbi-Target-apiRoot=http://ausf1svc.scpsvc.svc.cluster.local:8080/USEast,
3gpp-sbi-routing-binding=bl=nf-set;nfset=set1.ausfset.5gc.mnc012.mcc345;servName=nausf-auth
```

The following table describes the header attribute values:

**Table 3-2 Notification Message Header Attributes**

| Notification Headers     | Attributes                                                         |
|--------------------------|--------------------------------------------------------------------|
| 3gpp-Sbi-Callback        | Nudm_UECM_Update                                                   |
| User-Agent               | UDM-udm1svc.scpsvc.svc.cluster.local                               |
| 3gpp-Sbi-Target-apiRoot  | http://ausf1svc.scpsvc.svc.cluster.local:8080/USEast               |
| 3gpp-sbi-routing-binding | bl=nf-set;nfset=set1.ausfset.5gc.mnc012.mcc345;servName=nausf-auth |

The following table provides a sample Routing Options Config REST API configuration at SCP:

**Table 3-3 Routing Options Config Parameters Configured at SCP**

| Parameter                           | Configuration 1      | Configuration 2      | Configuration 3      | Configuration 4      |
|-------------------------------------|----------------------|----------------------|----------------------|----------------------|
| messageType                         | notification-message | notification-message | notification-message | notification-message |
| notificationType                    | *                    | *                    | *                    | *                    |
| nfType                              | AUSF                 | AUSF                 | AUSF                 | AUSF                 |
| nfServiceName                       | nausf-auth           | nausf-auth           | nausf-auth           | nausf-auth           |
| senderNFType                        | UDM                  | UDM                  | UDM                  | UDM                  |
| notificationSender.apiNameAxHeading | nudm_uecm            | nudm-ee              | Not configured       | nudm_uecm            |
| notificationSender.serviceOperation | Not configured       | notify               | Not configured       | update               |
| method                              | POST                 | POST                 | POST                 | POST                 |
| apiSpecificResourceUri              | *                    | *                    | *                    | *                    |

In the above table, all the header attributes of the notification message are matched with the parameters of Routing Options Config REST API. Where, Configuration 1, Configuration 2, Configuration 3, and Configuration 4 are different routing options configured at SCP. The key

parameters that are considered for matching are nfType, nfServiceName, senderNFType, apiNameAxHeading, and serviceOperation.

The inference drawn after matching the values of the routing options parameters with the corresponding header attributes from the above tables is as follows:

- Configuration 1 is considered a partial match for the routing option because all key parameters except for serviceOperation, which is not configured, match the header attributes. Even if serviceOperation is configured with a mismatched value, for example, notify, Configuration 1 will still be considered a partial match because the value of serviceOperation does not align with the value of 3gpp-Sbi-Callback. In this case, a configuration where serviceOperation is not set (no value) will take precedence over the configuration with a mismatched value.
- Configuration 2 is considered a no match for the routing option because values of two key parameters, apiNameAxHeading and serviceOperation, mismatch the 3gpp-Sbi-Callback header attributes. In this case, SCP will consider the default routing option.
- Configuration 3 is considered a no match for the routing option because two key parameters, apiNameAxHeading and serviceOperation, which are not configured, mismatch the 3gpp-Sbi-Callback header attributes. In this case, Configuration 3 will take precedence over Configuration 2 and SCP will consider the default routing option.
- Configuration 4 is considered the best match for the routing option because all key parameters match the header attributes.

Sample Configuration 4:

```
{
  "configName": "config1_S1G3",
  "routingOptionsConfigData": {
    "messageType": ["notification-message"],
    "notificationType": ["*"],
    "nfType": "AUSF",
    "nfServiceName": "nausf-auth",
    "method": ["POST"],
    "apiSpecificResourceUri": ".*",
    "senderNFType": "UDM",
    "notificationSender": {
      "apiNameAxHeading": "nudm_uecm",
      "serviceOperation": "update"
    },
  },
  "routingConfigSetName": "configsetname1_S1G3"
}
```

## Managing Routing Options Enhancement for Notification Messages

### Enable

This feature is enabled automatically at the time of SCP deployment.

### Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see the following sections:
  - [Configuring Routing Options](#)
  - [Configuring NFTypes-NFServices](#)

- **Configure using REST APIs:** For information about configuring REST APIs, see "Configuring Routing Options Config" and "Configuring NFTypes-NFServices" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

There are no specific metrics and alerts required for this feature.

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.1.3 Routing Options Enhancement to Control SCP Routing Features

At SCP, there are a number of routing features such as Circuit Breaking, Outlier Detection and so on that proactively track the producer NF to determine the load conditions and health status of the producer NF and perform alternate routing of incoming SBI messages that are targeted towards the degraded producer NFs.

With this enhancement, SCP supports proactive rerouting, in which a user can control the applicability of routing features at the NF service level by providing options to enable or disable rerouting.

The following routing features at the NF service level can be enabled or disabled:

- Congestion control based on Producer load
  - Using producer load from NRF
  - Using producer load in the LCI header
- Circuit Breaking
- Outlier Detection

#### Note

Alternate routing based on the following conditions are not impacted by this enhancement:

- Error received from the producer
- Request a timeout at the SCP
- Transport error at SCP during connection creation

## Managing Routing Options Enhancements

### Enable

You can enable this feature by setting `odEnabled`, `loadBasedCongestionControlEnabled`, `cbEnabled` parameters to true. For more information, see [Configuring Global Options](#), [Configuring Routing Options](#), and [Configuring Routing Config Set](#) respectively.

### Configure

You can configure this feature using REST APIs as described in "Routing Option Configuration", "Congestion Control Configuration", "Routing Config Set", "Circuit Breaking Configuration", "Configuring Routing Option", and "Configuring System Option" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.1.3.1 Alternate Routing Configuration Based on Received Status Code 504, Expired Response Timeout and Connection Error

SCP enhances the routing of Service-Based Interface (SBI) requests by allowing configurable error code-based rerouting. This improvement allows users to configure retries based on timeouts received from upstream producers, locally detected timeouts, or both.

Previously, SCP rerouted requests based on HTTP response codes from upstream NF, SCP, or SEPP. If a request timed out and no response was received, SCP automatically rerouted the request when retries were enabled, using the configured error code of 504.

The following enhancements allow better error handling capabilities:

- **Customizing Configuration for Rerouting on Timeout:** It allows you to enable or disable rerouting of requests that encounter a local timeout, such as response timeouts detected by SCP, providing flexibility to manage routing based on operational requirements.
- **Timeout Differentiation Functionality:** It distinguishes between local timeouts (indicated by a local 504 response) and 504 responses received from upstream components.
- **Support for Error Conditions for Alternate Routing:** If SCP faces other errors such as `connectionError` or `timeout`, while routing to the upstream server, and if these errors are configured, SCP tries rerouting based on the configured alternate routing mechanism. The following error condition parameters can be used in `rerouteConditionList`:
  - `connectionError`: When SCP tries to send requests but fails due to any connection error, SCP relies on lower layers for getting exceptions on any connection error.
  - `timeout`: When SCP sends requests but does not receive any response from upstream, SCP timeout occurs locally waiting for a response.

For more information about `connectionError` and `timeout`, see "Configuring Routing Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Managing Alternate Routing Configuration

#### Enable

This feature is integrated with the alternate routing functionality.

### Configure

You can configure this feature using REST API and the CNC Console.

- Configure using CNC Console: For information about CNC Console configurations, see [Configuring Routing Config Set](#).
- Configure using REST API: For information about configuring REST APIs, see "Routing Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*

### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.1.4 Routing Options Enhancements for Next Hop SCP and Notification or Callback Messages

The existing configuration of routing options supports 3GPP defined 5G NF services types, such as nudm-uecm, nudm-sdm, nsmsf-sms, and so on. However, there is no routing option defined for the following:

- 5G SBI notification or callback requests
- Inter-SCP or next hop SCP routing

With the introduction of this feature, the existing 5G SBI message routing option is enhanced to support:

- 5G SBI notification or callback message requests: SCP uses the "3gpp-sbi-callback" header to identify whether a 5G SBI request is a notification or callback.
- Inter-SCP or next hop SCP routing: When a consumer SCP routes a 5G SBI service request to the next hop SCP, the consumer SCP must have configurable routing options for SCP to SCP interface for each 3GPP defined 5G NF Service types, such as nudm-uecm, nudm-sdm, nsmsf-sms, and so on, if more than one SCP instance is involved in routing the 5G SBI service request. A new parameter known as nextHopSCP is introduced to the existing routing configurations to support this functionality.

This feature provides flexibility to configure inter-SCP or next hop SCP routing options for all services.

SCP derives an incoming message type from both "3gpp-sbi-callback" header and servicename in path to identify if it is a notification or callback request, or service request.

SCP uses the nextHopSCP routing configuration when routing messages towards the next hop SCP. The nextHopSCP routing parameters are set in SCP to define the message processing time to get a response from the producer NF instance in the same network or from another SCP instance in a different region.

**Identification of 5G SBI Notification or Callback Messages**

SCP identifies whether the ingress message request is a notification or callback, or service specific request based on the "3gpp-sbi-callback" header and the servicename in path present in the Uniform Resource Identifier (URI).

The following table describes different scenarios to identify a message request based on the availability of the "3gpp-sbi-callback" header and servicename in path.

**Table 3-4 Identifying a Message Request**

| 3gpp-sbi-callback | servicename in path | Description                                                                                                                                                                                                                    | Expected Routing at SCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Present           | Absent              | The message request is considered as a 5G SBI notification or callback.<br>Routing option configured for "5g-sbi-notification" is applicable.<br>For more information about "5g-sbi-notification", see 3GPP TS 29.500 v16.6.0. | The expected notification message routing is as follows: <ul style="list-style-type: none"> <li>• If the 3gpp-Sbi-Routing-Binding header is present, then the alternate routing as per Model C, Model D, and interPLMN traffic routing feature support at SCP.</li> <li>• If an alternate routing configuration is configured at SCP, then the alternate routing as per DNSSRV or route group configuration is supported at SCP.</li> <li>• If both alternate notification endpoint selection information is unavailable, SCP cannot perform notification message alternate routing.</li> </ul> |
| Present           | Present             | The message request is considered as a 5G SBI notification or callback.<br>Routing option configured for "5g-sbi-notification" is applicable.                                                                                  | The expected notification message routing is as follows: <ul style="list-style-type: none"> <li>• If the 3gpp-Sbi-Routing-Binding header is present, then the alternate routing as per Model C, Model D, and interPLMN traffic routing feature support at SCP.</li> <li>• If an alternate routing configuration is configured at SCP, then the alternate routing as per DNSSRV or route group configuration is supported at SCP.</li> <li>• If both alternate notification endpoint selection information is unavailable, SCP cannot perform notification message alternate routing.</li> </ul> |



Table 3-4 (Cont.) Identifying a Message Request

| 3gpp-sbi-callback | servicename in path | Description                                                                                                                                   | Expected Routing at SCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Absent            | Absent              | The message request is considered as a 5G SBI notification or callback.<br>Routing option configured for "5g-sbi-notification" is applicable. | The expected notification message routing is as follows: <ul style="list-style-type: none"> <li>If the 3gpp-Sbi-Routing-Binding header is present, then the alternate routing as per Model C, Model D, and interPLMN traffic routing feature support at SCP.</li> <li>If an alternate routing configuration is configured at SCP, then the alternate routing as per DNSSRV or route group configuration is supported at SCP.</li> <li>If both alternate notification endpoint selection information is unavailable, SCP cannot perform notification message alternate routing.</li> </ul>                                                 |
| Absent            | Present             | The message request is considered as a 5G SBI service specific request.<br>Routing option configured to specific 5G NF service is applicable. | The expected service request message routing is as follows: <ul style="list-style-type: none"> <li>If the 3gpp-Sbi-Routing-Binding header is present, then the alternate routing as per Model C, Model D, and interPLMN traffic routing feature support at SCP.</li> <li>If an alternate routing configuration is configured at SCP, then the alternate routing feature as per DNSSRV or route group configuration is supported at SCP.</li> <li>If both alternate notification endpoint selection information is unavailable, SCP will be unable to perform alternate routing based on reverse lookup feature support at SCP.</li> </ul> |

### Managing Routing Options Enhancements for Next Hop SCP and Notification or Callback Messages

#### Enable

This feature is enabled automatically at the time of SCP deployment.

#### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using REST API:** For information about the REST API configurations, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **Configure using CNC Console:** For information about configuring NF instance IDs, see [Configuring the nextHopSCP Routing Option](#).

#### Observe

For information about metrics, see [Metrics](#).

## Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.2 Support for 3GPP Defined NFs, Custom NFs, and Custom NF Services

In SCP 24.3.0 and earlier releases, SCP supported only 3GPP defined NFs and NF services (a set of 3GPP defined NFs supported by SCP). To add any new NF or NF services, SCP required a software update.

From SCP 25.1.100, SCP enhances its capability to support the addition of new 3GPP defined NFs, custom NFs, and custom NF services at runtime using REST APIs. Any NF type or NF service that is not configured in SCP remains UNKNOWN. SCP creates routing rules for the newly added NF types and NF services without any software update. These routing rules are created to route any service message request or notification from consumer NFs to producer NFs.

### Routing Options Selection

Any new 3GPP defined NFs, custom NF types, or custom NF services can be configured using the NFTypes-NFServices REST API. The `apiName` parameter is also configured with NFType and NFService REST API parameters to uniquely identify NFType and NFService pair. The `apiName` parameter is obtained from the service message request URI. For more information about the NFTypes-NFServices REST API, see "Configuring NFTypes-NFServices" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

SCP-Worker identifies the NF type and NF service of the request using the `apiName` REST API parameter from the received path URI [Request URI structure: `{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>`].

### Sample NFTypes-NFServices REST API configuration

```
{
  "configName": "config1",
  "nfServiceData": {
    "nfType": "UDM",
    "serviceName": "nudm-uecm",
    "apiName": "apiName1",
    "serviceType": ["notification-message-service", "request-message-
service"]
  },
  "createdTimestamp": "2024-04-24 14:50:56.0",
  "updatedTimestamp": "2024-04-24 14:50:56.0"
}
```

The existing Routing Options REST API has been enhanced to include the following REST API parameters, along with `nfServiceName`, to provide match criteria for selecting a routing option:

- `messageType`
- `nfType`
- `senderNFType`
- `method`
- `notificationType`
- `apiSpecificResourceUri`

SCP-Worker extracts the above mentioned parameters from ingress message requests and matches them with the parameters of the Routing Options Config REST API configured at SCP to determine the best matched routing options. From the selected routing options, the `routingConfigSetName` parameter is obtained which points to the routing related parameters, such as `maxRoutingAttempts`, `responseTimeout`, and so on, to route message requests to producer NFs with the configured values obtained from `routingConfigSetName`. For more information about routing options and routing related parameters, see "Configuring Routing Options Config" and "Configuring Routing Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Matching Routing Options Config Parameters of Ingress Message Request with Routing Options Config Parameters Configured at SCP

This subsection describes how the Routing Options Config parameters of ingress message requests are matched with Routing Options Config parameters configured at SCP to determine the best match. The following table provides a sample Routing Options Config parameter configuration received from the ingress message request:

**Table 3-5 Routing Options Config Parameters in the Ingress Message Request**

| Parameter                           | Value                                           |
|-------------------------------------|-------------------------------------------------|
| <code>messageType</code>            | <code>svc-request-message</code>                |
| <code>nfType</code>                 | <code>PCF</code>                                |
| <code>senderNFType</code>           | <code>AMF</code>                                |
| <code>nfServiceName</code>          | <code>npcf-am-policy-control</code>             |
| <code>method</code>                 | <code>POST</code>                               |
| <code>apiSpecificResourceUri</code> | <code>npcf-am-policy-control/v1/policies</code> |
| <code>notificationType</code>       | <code>NA</code>                                 |

The following table provides a sample Routing Options Config configuration at SCP:

**Table 3-6 Routing Options Config Parameters Configured at SCP**

| Parameter                 | Rule1                            | Rule2                                                  | Rule3                             | Rule4                            |
|---------------------------|----------------------------------|--------------------------------------------------------|-----------------------------------|----------------------------------|
| <code>messageType</code>  | <code>svc-request-message</code> | <code>svc-request-message, notification-message</code> | <code>notification-message</code> | <code>svc-request-message</code> |
| <code>nfType</code>       | <code>PCF</code>                 | <code>*</code>                                         | <code>PCF</code>                  | <code>PCF</code>                 |
| <code>senderNFType</code> | <code>AMF</code>                 | <code>*</code>                                         | <code>*</code>                    | <code>*</code>                   |

**Table 3-6 (Cont.) Routing Options Config Parameters Configured at SCP**

| Parameter              | Rule1                  | Rule2                              | Rule3 | Rule4                |
|------------------------|------------------------|------------------------------------|-------|----------------------|
| nfServiceName          | npcf-am-policy-control | npcf-am-policy-control             | *     | npcf-smpolicycontrol |
| method                 | POST                   | *                                  | POST  | POST                 |
| apiSpecificResourceUri | *                      | npcf-am-policy-control/v1/policies | *     | *                    |
| notificationType       | *                      | *                                  | NA    | *                    |

The inference drawn from the above mentioned tables is as follows:

- All the parameters of Routing Options Config received from the message request are matched with the parameters configured for Rule1, Rule2, Rule3, and Rule4 at SCP.
- Rule1 is the best match because all its parameters match with the message request.
- Rule2 is the second best match due to mismatch of the values of nfType and senderNFType parameters.
- Rule3 and Rule4 are not the best matches because values of messageType and nfServiceName parameters did not match.

### Service Level Features Configuration

NF Service level features, such as Outlier Detection, Circuit Breaking, Canary Release, Next Hop SCP, Overload Control Information, and so on, can be configured, and rule names can be defined by matching NFType and nfServiceName parameters of ingress message requests with the parameters of the NF Service Feature Config REST API configured at SCP. From the matched records, the nfServiceConfigSetName parameter is obtained, which points to cbEnabled, odEnabled, cbRuleName, odRuleName, and so on, to configure service level features. For information about NF Service Feature Config and NF Service Feature Config Set REST APIs, see "Configuring NF Service Feature Config" and "Configuring NF Service Feature Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

The following is a sample NF Service Feature Config Set REST API configuration:

```
{
  "configName": "udm_nudm_uecm_config1",
  "nfServiceConfigSetData": {
    "defaultPriority": 1,
    "defaultCapacity": 65535,
    "altRoutingDnsSrvModeSupported": false,
    "loadBasedCongestionControlEnabled": true,
    "nfServiceLoadBasedCongestionControlCfg": "defaultRule",
    "cbEnabled": false,
    "cbRuleName": "defaultRule",
    "odEnabled": false,
    "odRuleName": "defaultRule",
    "ociEnabled": false,
    "ociRuleName": "defaultOciConfigRule",
    "canaryReleaseEnabled": false,
    "canaryReleaseConfigName": "default",
    "nextHopSCP": {
```

```

        "loadBasedCongestionControlEnabled": true,
        "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopScp"
    },
    "nextHopSEPP": {
        "loadBasedCongestionControlEnabled": true,
        "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopSepp"
    }
},

"createdTimestamp": "2024-05-02 02:26:30.0",
"updatedTimestamp": "2024-05-02 02:26:30.0"
}

```

### Matching NF Service Feature Config Parameters of Ingress Message Request with NF Service Feature Config Parameters Configured at SCP

This subsection describes how NF Service Feature Config parameters of ingress message requests are matched with NF Service Feature Config parameters configured at SCP to determine the best match. The following table provides a sample NF Service Feature Config parameter configuration received from the ingress message request:

**Table 3-7 NF Service Feature Config Parameters in the Ingress Message Request**

| Parameter     | Value                  |
|---------------|------------------------|
| NFType        | PCF                    |
| nfServiceName | npcf-am-policy-control |

The following table provides a sample NF Service Feature Config parameters configuration at SCP:

**Table 3-8 NF Service Feature Config Parameters Configured at SCP**

| Parameter     | RuleA                  | RuleB                  | RuleC | RuleD                |
|---------------|------------------------|------------------------|-------|----------------------|
| NFType        | PCF                    | *                      | PCF   | PCF                  |
| nfServiceName | npcf-am-policy-control | npcf-am-policy-control | *     | npcf-smpolicycontrol |

The inference drawn from the above mentioned tables is as follows:

- All the parameters of NF Service Feature Config received from the message request are matched with the parameters configured for RuleA, RuleB, RuleC, and RuleD at SCP.
- RuleA is the best match because all its parameters match with the message request.
- RuleC is the second best match due to mismatch of the nfServiceName parameter value.
- RuleB and RuleD are not the best matches because the nfServiceName parameter value did not match.

### Behavior of SCP when ignore\_unknown\_nfservice is Modified

The following scenarios describes behavior of SCP when NfType-NfService is added or removed and the ignore\_unknown\_nfservice parameter is enabled or disabled:

- ignore\_unknown\_nfservice is enabled and NfType-NfService is added: The existing NFProfiles are checked to detect the newly added NfType-NfService combinations. If any

match is found, those NFProfiles are processed as reconfigured candidates, and routing rules are created. An on-demand audit is triggered for the new NFType from SCPC-Configuration.

- `ignore_unknown_nfservice` is enabled and `NfType-NfService` is removed: The existing NFProfiles are checked to detect the removed `NfType-NfService`. If any match is found, those NFProfiles are processed as reconfigured candidates, and the matching rule is removed only for the removed `NfType-NfService`.  
When the last `NfService` under `NfType` is removed and if `NFType` is also removed from SCP's configuration, then the matching NFProfiles are deregistered. When the profile level FQDN is present, the rule is updated to have only the default service (profile level rule). When the profile level FQDN is absent, deregister the instance for any such profile.
- `ignore_unknown_nfservice` is disabled and `NfType-NfService` is added: The rule is added through an on-demand audit for added `NfType-NfService`.
- `ignore_unknown_nfservice` is disabled and `NfType-NfService` is removed: Deregister NFInstances for any matching NFProfile containing the removed `NfType-NfService`.

### Managing Support for 3GPP Defined NFs, Custom NFs, and Custom NF Services

#### Enable

By default, this feature is enabled at the time of SCP deployment.

#### Configure

You can configure this feature using REST APIs and CNC Console.

The following table describes the sequence of REST API and CNC Console configurations:

**Table 3-9 Configuration Sequence**

| Configuration Sequence | Description                                                                                                                                                                                                                                                                                                                                                                                                | Sample Configuration                                                                                                                                                                                                                                       |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                      | <p>Configure new 3GPP defined NFs, custom NF types, or custom NF services in SCP. For more information, see:</p> <ul style="list-style-type: none"> <li>• the "Configuring NFTypes-NFServices" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>• the <a href="#">Configuring NFTypes-NFServices</a> section.</li> </ul> | <pre>{   "configName": "udm_nudm-uecm",   "nfServiceData": {     "nfType": "UDM",     "serviceName": "nudm-uecm",     "apiName": "nudm-uecm",     "serviceType": [       "notification-message-service",       "request-message-service"     ]   } }</pre> |

Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sample Configuration                                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| 2                      | <p>Define the topology source of the NFType by adding a new entry for this NFType or continue using the default entry if the Topology source is identical. For more information, see:</p> <ul style="list-style-type: none"> <li>the "Configuring NF Topology Groups" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>the <a href="#">Configuring Topology Source Info</a> section.</li> </ul>    | <pre>{   "nftype": "*",   "topologysource": "NRF" }</pre>                                                                           |
| 3                      | <p>Feature configuration for both NFType and nfServiceName is done in the following sequence:</p> <ol style="list-style-type: none"> <li>1. Configure feature set, such as Circuit Breaking, Outlier Detection, Egress Congestion Control, and Canary Release.</li> <li>2. Bind the feature configuration set with NFType and nfServiceName.</li> </ol> <p><b>Note:</b> The above mentioned configurations were part of the RoutingOptions table in 24.3.0 and earlier releases.</p> |                                                                                                                                     |
| 3.1                    | <p>Define Canary Release configuration as described in:</p> <ul style="list-style-type: none"> <li>the "Configuring CanaryRelease Options" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>the <a href="#">Configuring Canary Release</a> section.</li> </ul>                                                                                                                                     | <pre>{   "configName": "udm-uecm- cr-config",   "canaryData": {     "apiFullVersion": "1.0.0",     "canaryTraffic": 100   } }</pre> |

Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description                                                                                                                                                                                                                                                                                                                                                                                                                           | Sample Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3.1.1                  | <p>Define NF Service Feature Config Set for newly configured NFType and nfServiceName configurations as described in:</p> <ul style="list-style-type: none"> <li>the "Configuring NF Service Feature Config Set" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>the <a href="#">Configuring NF Service Feature Config Set</a> section.</li> </ul> | <pre>{   "configName": "udm-uecm-feature-config-set",   "nfServiceConfigSetData": {     {       "defaultPriority": 1,       "defaultCapacity": 65535,        "altRoutingDnsSrvModeSupported": false,        "loadBasedCongestionControlEnabled": false,        "nfServiceLoadBasedCongestionControlCfg": "ss",         "cbEnabled": false,         "cbRuleName": "defaultRule",         "odEnabled": false,         "odRuleName": "defaultRule",         "ociEnabled": false,         "ociRuleName": "defaultOciConfigRule",        "canaryReleaseEnabled": true,        "canaryReleaseConfigName": "udm-uecm-cr-config",         "nextHopSCP": {        "loadBasedCongestionControlEnabled": true,        "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopScp"         },         "nextHopSEPP": {        "loadBasedCongestionControlEnabled": true,</pre> |



Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Sample Configuration                                                                                                                                                                                      |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <pre> "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopSepp "     }   } } </pre>                                                                                                           |
| 3.2                    | <p>Bind the above mentioned NF Service Feature Config Set with newly configured NFType and nfServiceName as described in:</p> <ul style="list-style-type: none"> <li>the "Configuring NF Service Feature Config" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>the <a href="#">Configuring NF Service Feature Config</a> section.</li> </ul>                            | <pre> {   "configName": "udm-uecm-feature-config",   "nfServiceConfig": {     "nfType": "udm",     "nfServiceName": "nudm-uecm",     "nfServiceConfigSetName": "udm-uecm-feature-config-set"   } } </pre> |
| 4                      | <p>Routing Options REST API configuration is done in the following sequence to add new NF types and NF services:</p> <ol style="list-style-type: none"> <li>1. Configure Routing Options REST API parameters for different features in SCP.</li> <li>2. Bind the Routing Options Config Set with the match criteria.</li> </ol> <p><b>Note:</b> The above mentioned configurations were part of the RoutingOptions table in 24.3.0 and earlier releases.</p> |                                                                                                                                                                                                           |

Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description                                                                                                                                                                                                                                                                                                                                     | Sample Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4.1                    | <p>Define Routing Options Config Set as described in:</p> <ul style="list-style-type: none"> <li>the "Configuring Routing Config Set" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>the <a href="#">Configuring Routing Config Set</a> section.</li> </ul> | <pre>{   "routingConfigSetName":     "defaultRoutingConfigSet",   "configureRoutingOptions":     {       "pod": {         "maxRoutingAttempts": 1,         "alternateRouting": true       },       "alternateNFGroupRoutingOptions": {         "mode": "NF_SET"       },       "srv": {         "name": "5g-sbi- notification",         "maxRoutingAttempts": 3,         "alternateRouting": true       },       "totalTransactionLifetime"         : "6s",       "reRouteConditionList": [         {           "statusCode":             "307"         },         {           "statusCode":             "308"         },         {           "statusCode":             "429"         },         {           "statusCode":             "5xx"         }       ]     } }</pre> |

Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description | Sample Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        |             | <pre>         "statusCode": "connectionError"       },       {         "statusCode": "timeout"       }     ],     "responseTimeout": "1s",     "exceptionErrorResponses": [   {     "name": "Destination_Exhausted",     "action": "Send_Answer",     "error_code": 504,     "error_response": "Gateway Timeout",     "error_profile": "default_exception_error_d estination_exhausted"   },   {     "name": "No_Response",     "action": "Send_Answer",     "error_code": 504,     "error_response": "Gateway Timeout",     "error_profile": "default_exception_error_n o_response"   },   {     "name": "Connect_Failure",     "action": "Send_Answer", </pre> |

Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description | Sample Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        |             | <pre>                 "error_code": 504,  "error_response": "Gateway Timeout",  "error_profile": "default_exception_error_c onnect_failure"             },             {                 "name": "No_Host",                 "action": "Send_Answer",                 "error_code": 400,  "error_response": "Bad Request",  "error_profile": "default_exception_error_n o_host"             },             {                 "name": "Insufficient_Time",                 "action": "Send_Answer",                 "error_code": 504,  "error_response": "Gateway Timeout",  "error_profile": "timeHdrInsufficientTimeEr rorProfile"             }         ],         "deploymentModel": "SITE_WIDE",         "name": "5g-sbi- notification",  "assignPreferredLocality": false, </pre> |

Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description | Sample Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        |             | <pre> "overridePreferredLocality": false,  "forwardRevisedPreferredLocality": false,   "nextHopSEPP": {  "totalTransactionLifetime": "7s",  "responseTimeout": "4s",   "service": {  "maxRoutingAttempts": 2   },  "serviceEndpoint": {  "maxRoutingAttempts": 1   },  "loadBasedCongestionControlEnabled": true,  "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopSepp",  "reRouteConditionList": [   {     "statusCode": "307"   },   {     "statusCode": "308"   },   {     "statusCode": "429"   },   {     "statusCode": "5xx"   },   { </pre> |

Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description | Sample Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        |             | <pre>         "statusCode": "connectionError"         },         {         "statusCode": "timeout"         }     ],     "exceptions": [         {             "name": "No_Host",             "action": "Send_Answer",             "error_code": 400,             "error_response": "Bad Request",             "error_profile": "default_exception_error_n o_host"         },         {             "name": "Destination_Exhausted",             "action": "Send_Answer",             "error_code": 504,             "error_response": "Gateway Timeout",             "error_profile": "default_exception_error_d estination_exhausted"         }     ] },     "nextHopScp": {         "totalTransactionLifetime" : "7s",         "responseTimeout": "4s", </pre> |

Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description | Sample Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        |             | <pre> "reRouteConditionList": [{   "statusCode": "connectionError"   } ],   "service": {     "maxRoutingAttempts": 2   },   "serviceEndpoint": {     "maxRoutingAttempts": 1   },   "loadBasedCongestionControlEnabled": true,   "nfServiceLoadBasedCongestionControlCfg":   "defaultRuleForNextHopScp" ,   "exceptions": [     {       "name": "Destination_Exhausted",       "action": "Send_Answer",       "error_code": 504,       "error_response": "Gateway Timeout",       "error_profile": "default_exception_error_destination_exhausted"     }   ] } </pre> |

Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Sample Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4.2                    | <p>Bind the Routing Options Config Set with match criteria:</p> <ul style="list-style-type: none"> <li><b>Config_One:</b> This Routing Options is applied for any message request from UDM/numd-uecm. If there is any notification message from UDM/numd-uecm, the default Routing Option preconfigured for the notification message ("defaultSvcNotificationConfig") is applied.</li> <li><b>Config_Two:</b> This Routing Option is applied for any service request message from UDM/numd-uecm with HTTP Method as PUT. Create Routing Options Config Set "ro_config_set_two" as mentioned in sequence 4.1.</li> <li><b>Config_Three:</b> This Routing Option is applied for service message requests from UDM/numd-uecm with HTTP Method as PATCH.</li> <li>Create Routing Options Config Set "ro_config_set_three" as mentioned in Sequence 4.1 or any existing Routing Config Set if that satisfies the routing parameter configuration values.</li> </ul> <p>For more information about this configuration, see:</p> <ul style="list-style-type: none"> <li>the "Configuring Routing Options Config" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>the <a href="#">Configuring Routing Options</a> section.</li> </ul> | <p><b>Config_One</b></p> <pre>{   "configName":   "ro_config_one",    "routingOptionsConfigData" : {     "messageType": [       "svc-request- message"     ],     "notificationType":     [],     "nfType": "UDM",     "nfServiceName":     "nudm-uecm",     "method": [       "*"     ],      "apiSpecificResourceUri":     ".*",     "senderNFType": "*",      "routingConfigSetName":     "ro_config_set_one"   } }</pre> <p><b>Config_Two</b></p> <pre>{   "configName":   "ro_config_two",    "routingOptionsConfigData" : {     "messageType": [       "svc-request- message"     ],     "notificationType":     [],     "nfType": "UDM",     "nfServiceName":     "nudm-uecm",     "method": [</pre> |



Table 3-9 (Cont.) Configuration Sequence

| Configuration Sequence | Description | Sample Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        |             | <pre>         "PUT"       ],        "apiSpecificResourceUri":       ".*",       "senderNFType": ".*",        "routingConfigSetName":       "ro_config_set_two"     }   }    Config_Three    {     "configName":     "ro_config_three",      "routingOptionsConfigData"     : {       "messageType": [         "svc-request- message"       ],       "notificationType":       [],       "nfType": "UDM",       "nfServiceName":       "nudm-uecm",       "method": [         "PATCH"       ],        "apiSpecificResourceUri":       ".*",       "senderNFType": ".*",        "routingConfigSetName":       "ro_config_set_three"     }   } </pre> |

**Note**

To remove NFTypes-NFServices and related configurations from SCP, follow the steps mentioned in the above table in reverse order.

### Observe

The `ocscp_worker_routing_options_selected_total` metric is added in the [Metrics](#) section.

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.3 Traffic Segregation

In SCP 24.3.x and earlier releases, SCP did not have an end-to-end network segregation mechanism based on traffic types. SCP was using the Load Balancer Virtual Machine (LBVM) and MetalLB features of Oracle Communications Cloud Native Core, Cloud Native Environment (CNE) to load balance the traffic received from consumer NFs and other components of Cloud Native Core (CNC).

From SCP 25.1.100, SCP uses Cloud Native Load Balancer (CNLB) of CNE to load balance traffic by segregating different traffic types, such as Operations, Administration, and Maintenance (OAM) traffic from CNC Console and Service Based Interface (SBI) signaling traffic from consumer NFs. CNE provides the CNLB functionality to manage load balancing as an alternative to the existing LBVM or MetalLB solutions. SCP continues to use LBVM or MetalLB and cannot enable CNLB if the CNE setup does not have CNLB enabled. Use of CNLB requires fresh installation of SCP if prior deployment is not using CNLB.

#### Note

CNLB is supported for both vCNE and BareMetal deployments of CNE.

For more information about CNLB, see *Oracle Communications Cloud Native Core, Cloud Native Environment User Guide*.

This feature enables SCP to:

- use dedicated subnetwork for different traffic types that improves security, reduces latency, and reduces congestion.
- address the challenge of logically separating different traffic types, which are typically handled through a single network (Kubernetes overlay).

The feature requires configuration of Network Attachment Definitions (NADs) and CNLB to facilitate traffic segregation and optimize load distribution in SCP.

CNLB uses Multus Container Network Interface (CNI), which creates different interfaces for the same or different traffic types. CNLB exposes its IP addresses and ports to consumer NFs to establish communication with SCP-Worker using the Network Attachment Definition (NAD) configuration. SCP registers with NRF using these IP addresses to enable other NFs to discover SCP in the network and notify their profile events to SCP through NRF. For more information about Multus and NAD, see [Support for Multus Container Network Interface](#).

## Managing Traffic Segregation

### Enable

By default, this feature is disabled at the time of SCP deployment. To enable this feature, perform the following procedure:

#### Note

If CNE is installed with CNLB, this feature should be enabled in SCP.

1. Open the `ocscp_values.yaml` file and set the `cnlbInfo.cnlbEnable` Helm parameter to `true`.
2. Configure the exposed external IPv4 and IPv6 addresses of CNLB using `cnlbInfo.cnlbIPv4` and `cnlbInfo.cnlbIPv6` parameters to enable other NFs to establish communication with SCP.

#### Note

You can configure either IPv4 or IPv6 or both.

For more information about `cnlbInfo.cnlbEnable`, `cnlbInfo.cnlbIPv4`, and `cnlbInfo.cnlbIPv6`, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Sample configuration:

```
cnlbInfo:
  # Enable/Disable cnlb, possible values are true or false. Default value
  # is false.
  cnlbEnable: true
  # CNLB IPv4 addresses
  cnlbIPv4:
    - 10.123.0.0
    - 10.123.0.1
    - 10.123.0.2
  # CNLB IPv6 addresses
  cnlbIPv6:
    - d678:f81d:a355:6794:658a:7e50:c208:7f0d
    - 0b3e:a0da:6c7f:ec79:75e7:40b2:3411:392e
    - 0d68:4f2b:649b:f97d:52e4:2036:d96c:8bad
```

3. Configure the 'network attachment' and 'cnlb' annotations in the `scp-worker.deployment.customExtension.annotations` Helm parameter. For more information about annotation values, see *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

Sample single network annotation:

```
scp-worker:
...
.
```

```

deployment:
  ..
  # Labels and Annotations that are specific to deployment are added
  here.
  customExtension:
    labels: {}
    annotations:
      k8s.v1.cni.cncf.io/networks: default/nf-sig-ie3@nf-sig-ie3
      oracle.com/cnlb: '[{"backendPortName": "http2-5gsig",
"cnlbIp": "10.75.181.55", "cnlbPort": "8000"},
                        {"backendPortName": "https-5gsig",
"cnlbIp": "10.75.181.55", "cnlbPort": "9443"}]'

```

4. Save the `ocscp_values.yaml` file.
5. Run the following command to install SCP using charts from the Helm repository:

```

helm install <release name> -f <custom_values.yaml> --namespace
<namespace> <helm-repo>/chart_name --version <helm_version>

```

In case charts are extracted:

```

helm install <release name> -f <custom_values.yaml> --namespace
<namespace> <chartpath>

```

## Configure

You can configure this feature using the following Helm parameters:

- `containerPortNames.scp-worker.http`
- `containerPortNames.scp-worker.https`
- `containerPortNames.scp-cache.coherence`
- `containerPortNames.scp-config.http`
- `cnlbInfo.cnlbEnable`
- `cnlbInfo.cnlbIPv4`
- `cnlbInfo.cnlbIPv6`
- `scpc-configuration.deployment.customExtension.annotations`
- `scp-cache.deployment.customExtension.annotations`
- `scp-worker.deployment.customExtension.annotations`

For information about the above mentioned Helm parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

## Observe

There are no specific metrics and alerts required for this feature.

## Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.4 TLS 1.3 Support for Kubernetes API

In a Kubernetes-based 5G Core deployment, SCP communicates with the Kubernetes API server (Kube-API-Server) to retrieve Kubernetes secrets and configmap information.

With the implementation of this feature, SCP supports TLS 1.3 in addition to TLS 1.2 for establishing secure communication with the Kubernetes API server.

### Managing TLS 1.3 Support for Kubernetes API

#### Enable

This feature is enabled by default as it depends on the configuration of the Kubernetes cluster if it's using TLS 1.2 or TLS 1.3.

#### Configure

There is not specific configuration required for this feature.

#### Observe

There are no alerts and metrics for this feature.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.5 LCM Automation

In SCP 25.1.200 and earlier releases, there was an option to provide a value for `scpServiceAccountName` or leave it blank. If the name was provided, service account, role, and rolebinding used to be configured before providing the name in the `custom-values.yaml` file. If the name was not provided, SCP used to create the default service account, role, and rolebinding based on the release name.

The Lifecycle Management (LCM) Automation feature optimizes deployment and upgrade processes of SCP by automating service account creation. This enhancement allows you to automatically create user-defined service accounts without any manual intervention. The automation process includes:

- **Creating Service Account:** An automated resource service account creation has been introduced in this release to streamline the management of Kubernetes resources through Helm charts.

- Applying NF Alert Configuration rules: SCP leverages the `oso-alr-config` Helm chart, introduced as part of the Operational Service Overlay (OSO) package, to apply alert rules using Helm upgrades. SCP can apply the alert file during the installation of `oso-alr-config` using Helm install. SCP can use Helm upgrade to update or clear the alerts. Both manual and automated configurations are supported.

### OSO Alerts Automation

Alerts are automated by using the Helm upgrade command with the Helm chart provided as part of the OSO software package. For more information, see [OSO Alerts Automation](#).

## Managing LCM Automation

### Enable

You can enable this feature using the following methods:

- Manual: see the "Manually Creating Service Account, Role, and Rolebinding" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.
- Automatic: see the "Automatically Creating Service Account, Role, and Rolebinding" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

### Configure

You can configure this feature using the following Helm parameters as described in the "Global Parameters" section of *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*:

- `scpServiceAccountName`
- `autoCreateResources.enabled`
- `serviceAccounts.create`
- `serviceAccounts.accounts.scpServiceAccountName`
- `serviceAccounts.accounts.type`

Sample Helm configuration:

```
global:

  #Keyname to give custom service account name
  scpServiceAccountName: &scpServiceAccountName ""

  #Flag for auto-creation of resource, disabled by default
  autoCreateResources:
    enabled: false

  serviceAccounts:
    create: true #internal flag to decide if the following resources should
    be automated
    accounts:
      - scpServiceAccountName: *scpServiceAccountName
        type: SCP
```

### Observe

There are no metrics, KPIs, or alerts available for this feature.

## Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.6 Error Response Enhancement

SCP used to send error responses to consumer NFs while processing message requests from or to consumer NFs. SCP used to generate these error responses in conditions, such as connection failure, timeout, an unknown host at SCP, and so on. The error responses generated by SCP comprised the error description in the detail parameter of ProblemDetails, which was inadequate to troubleshoot an error.

The following sample ProblemDetails displays various parameters:

```
{
  "title": "Service Unavailable",
  "status": "503",
  "detail": "Currently Congested. Could not process request.",
  "cause": "NF_CONGESTION"
}
```

With the enhanced error response mechanism, SCP sends additional information, such as server FQDN, NF service name, vendor name, and error ID, in the detail parameter of ProblemDetails to find the specific cause of the error. This helps in error identification and reduces troubleshooting time.

SCP has enhanced ProblemDetails for all the SCP generated 5G SBI message responses to identify the cause of the errors and troubleshoot them in the production environment.

The detail parameter in ProblemDetails includes information about problem details and error IDs in the following format, which is applicable only for SCP generated error responses:

<SCP FQDN>: <SCP specific problem detail>: <OSCP-scp error Id>

Where,

- <SCP FQDN> is the FQDN of SCP.
- <SCP specific problem detail> is the problem details.
- <OSCP-scp error Id> is the error ID with respect to SCP. It follows this format:

OSCP-<Service code>-<Category>-<3 digit error code>

- <Service code> is the microservice code that generates the error.
- <Category> is the error type for a particular microservice.
- <3 digit error code> is the error code prefixed by the alphabet E.

For more information about supported error IDs, see [SCP Error IDs](#).

Example of a sample error response:

```
ProblemDetails
{
  "title": "Access Token Denied",
  "status": 403,
  "detail": "scp1.e.com: OAuth token denied for Server1-FQDN: OSCP-OAU-
TKNRSP-E001",
  "cause": ACCESS_TOKEN_DENIED
}
```

SCP combines all the error responses from both internal and external sources, such as error responses generated by SCP and error responses received from producer NFs while performing alternate routing. SCP uses the `enhanced_error_rsp` attribute to combine all the error responses from both internal and external sources. For more information about `enhanced_error_rsp`, see [Configuring Error Response Enhancement](#).

#### Note

- When the `enhanced_error_rsp` parameter is disabled, `ProblemDetails` includes information about the last routing attempt made by SCP.
- When the `enhanced_error_rsp` parameter is enabled, `ProblemDetails` includes information about all the routing attempts made by SCP.

When SCP receives a message request from a consumer NF, SCP routes the request to the target producer NF. If the target producer NF is unavailable, SCP performs alternate routing to the next available producer NF. If SCP does not receive a success response from any producer NF after performing all the routing attempts, SCP generates an error response by updating the `detail` parameter with all the routing attempts made in the following format:

```
Latest attempt error string ; Status Code of previous attempt; Previous
attempt error string
```

Sample detail format:

```
"detail" : "<Server-NF FQDN>: <NF Service>: <Application specific problem
description>: <VendorNF-error-ID>; StatusCode; <SCP FQDN>: <Problem
Description>: <OSCP-scp error Id>"
```

Where,

- `<Server-NF FQDN>` is the FQDN of the NF that sends this error response. For example, `NRF-d5g.oracle.com`.
- `<NF Service>` is the NF service name applicable for 3GPP service operation. For example, `nnrf-disc`.
- `<Application specific problem description>` is a short description of the error. For example, `requesterNfType` should be present.



- <VendorNF-error-ID> is the error code generated by any vendor NF. For example, 0NRF-DIS-DISC-E0006.
- StatusCode is the HTTP status code for the previous routing attempt made by SCP. For example, 403.
- <SCP FQDN> is the FQDN of SCP. For example, ocscp-scp-worker.scpsvc.svc.cluster.local.
- <Problem Description> is the problem details. For example, Request cannot be routed due to rejection of access token request by NRF.
- <0SCP-scp error Id> is the ID of SCP. For example, 0SCP-0AU-TKNRSP-E001.

The following sample ProblemDetails is based on the scenario when SCP has made two retry attempts to two different Producer NFs and both resulted in error responses (first attempt: 503 and second attempt: 400) returned by producer NFs. SCP returns the last error response (400) to the consumer NF:

ProblemDetails

```
{
  "title": "Bad Request",
  "status": 400,
  "detail": "Server2-FQDN: [NF Service]:Application specific problem detail:
VendorNF-App-Error ID ; 503; Server1-FQDN: Application specific problem
detail: VendorNF-App-Error ID",
  "cause": INVALID_API
}
```

The title, status, and cause parameters in ProblemDetails provide information about the last routing attempt made. The detail parameter provides information about all the routing attempts in the reverse order.

#### Note

The error response sent by producer NFs is forwarded as it is to the consumer NF.

The detail parameter in ProblemDetails has a length restriction managed by the **Error Detail Max Size** field as described in [Configuring Error Response Enhancement](#). The extra length leads to truncation of data in the detail parameter from the end.

The following sample ProblemDetails is based on the scenario when a timeout has occurred at SCP during inter SCP communication:

```
{
  "title":"Timeout at SCP","status":504,
  "detail":"ocscp-scp-worker.scpsvc.svc.cluster.local:Service Unavailable for
pcf6svc.scpsvc.svc.cluster.local via scp61svc.scpsvc.svc.cluster.local:0SCP-
WRK-ROUTE-E001;504;ocscp-scp-worker.scpsvc.svc.cluster.local:Service
Unavailable for pcf6svc.scpsvc.svc.cluster.local via
scp51svcxyz.scpsvc.svc.cluster.local due to UnknownHostException:0SCP-WRK-
ROUTE-E002",
  "cause":"TIMED_OUT_REQUEST"}
```

The cause parameter of ProblemDetails provides a reason for the occurrence of the error, such as overload, access token denied, timeout, and so on. The cause parameter in ProblemDetails is managed as defined in Section 5.2.7 of 3GPP TS 29.500 v16.6.0. If this section does not mention the cause value for any specific error condition, SCP leaves the value of this parameter empty.

The following sample ProblemDetails does not specify the cause of the error:

```
ProblemDetails
{
  "title": "Unauthorized",
  "status": 401,
  "detail": "SCP-FQDN: Application specific problem detail: SCP-App-Error
ID",
  "cause": <empty>
}
```

## Managing Error Response Enhancement

### Enable

This feature is enabled automatically at the time of SCP deployment. You can enable or disable this feature using the CNC Console as described in [Configuring Error Response Enhancement](#).

### Configure

You can configure this feature using REST APIs, CNC Console, and Helm.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Error Response Enhancement](#).
- **Configure using REST APIs:** For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **Configure using Helm:** For information about configuring the SCP-Mediation microservice, see "SCP-Mediation Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

### Observe

The `ocscp_worker_problemdetails_details_maxlengthexceeded_total` metric is added in the [Metrics](#) section.

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.6.1 SCP Error IDs

The following table describes error IDs supported by SCP while generating error responses:

Table 3-10 SCP-Worker Microservice Error IDs

| Error Details                                                                                                                                                                                                                 | Description                                                                                                                              | Possible Causes and Corrective Actions                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Header Validation</b><br><b>Error ID:</b> OSCP-WRK-HDRVLD-E001<br><b>HTTP Response Code:</b> The HTTP status code is populated based on the configured value in the ErrorProfileConfiguration REST API<br>OR<br>403 | This ID indicates that the received CCA header failed validation.                                                                        | The <b>Cause</b> field is set based on the configured value in the ErrorProfileConfiguration REST API (such as, <code>errorProfile.getCause()</code> ).<br>OR<br>CCA_VERIFICATION_FAILURE<br><b>Corrective Actions</b><br>The Consumer NF should send a valid CCA header.                                                                                                                             |
| <b>Issue: Header Validation</b><br><b>Error ID:</b> OSCP-WRK-HDRVLD-E002<br><b>HTTP Response Code:</b> 400                                                                                                                    | This ID indicates that the received SBI request does not contain all mandatory discovery headers required for Delegated NF Discovery.    | Mandatory discovery headers were not received, resulting in missing required headers.<br>MANDATORY_QUERY_PARAM_MISSING<br><b>Corrective Actions</b><br>The Consumer NF must send all mandatory discovery headers in Model-D SBI messages.                                                                                                                                                             |
| <b>Issue: Header Validation</b><br><b>Error ID:</b> OSCP-WRK-HDRVLD-E003<br><b>HTTP Response Code:</b> 400                                                                                                                    | This ID indicates that the SBI request received has a malformed 3gpp-sbi-routing-binding header.                                         | A malformed Routing Binding header was received: <code>&lt;malformed-hdr&gt;</code> .<br>MANDATORY_IE_INCORRECT<br><b>Corrective Actions</b><br>The Consumer NF should send a valid 3gpp-sbi-routing-binding header.                                                                                                                                                                                  |
| <b>Issue: Header Validation</b><br><b>Error ID:</b> OSCP-WRK-HDRVLD-E004<br><b>HTTP Response Code:</b> 400                                                                                                                    | This ID indicates that the received SBI request has imperfectly formed target PLMN.                                                      | A malformed Target PLMN was received.<br>MANDATORY_IE_INCORRECT<br><b>Corrective Actions</b><br>The Consumer NF should send a valid value for the target PLMN in the Inter-PLMN SBI message.                                                                                                                                                                                                          |
| <b>Issue: Header Validation</b><br><b>Error ID:</b> OSCP-WRK-HDRVLD-E005<br><b>HTTP Response Code:</b> 400                                                                                                                    | This ID indicates that the received SBI request has a malformed default notification request.                                            | A malformed default notification request was received.<br>MANDATORY_IE_INCORRECT<br><b>Corrective Actions</b><br>Consumer NF should send a valid header and URI for the default notification request.                                                                                                                                                                                                 |
| <b>Issue: Header Validation</b><br><b>Error ID:</b> OSCP-WRK-HDRVLD-E006<br><b>HTTP Response Code:</b> 400                                                                                                                    | This ID indicates that the message could not be routed due to the absence of expected headers required to select a producer for routing. | Insufficient routing details were received in the request.<br>MANDATORY_IE_MISSING<br><b>Corrective Actions</b><br>Consumer NF should send the appropriate headers for the 5G SBI message to be routed. For a Model-C request, either the 3gpp-sbi-target-apiroot or 3gpp-sbi-routing-binding header should be present.<br>For a Model-D request, the 3gpp-sbi-discovery-* headers should be present. |
| <b>Issue: Header Validation</b><br><b>Error ID:</b> OSCP-WRK-HDRVLD-E007<br><b>HTTP Response Code:</b> 400                                                                                                                    | This ID indicates that the message could not be routed due to an invalid host value received in the 3gpp-sbi-target-apiroot header.      | An invalid host value was received in the 3gpp-sbi-target-apiroot header.<br>MANDATORY_IE_INCORRECT<br><b>Corrective Actions</b><br>Consumer NF should send a valid value for the host in the 3gpp-sbi-target-apiroot header.                                                                                                                                                                         |

Table 3-10 (Cont.) SCP-Worker Microservice Error IDs

| Error Details                                                                                                                                                                                                               | Description                                                                                                                                                                                                            | Possible Causes and Corrective Actions                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: NF Selection</b><br><b>Error ID:</b> OSCP-WRK-NFSEL-E001<br><b>HTTP Response Code:</b> 404                                                                                                                        | This ID indicates that the message could not be routed due to the absence of a learnt producer for the received 3gpp-sbi-routing-binding header and the absence of the 3gpp-sbi-target-apiroot header.                 | No routing rule was found for the received SBI request.<br><b>Corrective Actions</b><br>The Consumer NF should either send the 3gpp-sbi-target-apiroot header or a different binding value for the 3gpp-sbi-routing-binding header to route the SBI message.                                                                                                                                                      |
| <b>Issue: NF Selection</b><br><b>Error ID:</b> OSCP-WRK-NFSEL-E002<br><b>HTTP Response Code:</b> 400                                                                                                                        | This ID indicates that the message could not be routed due to the presence of an API version in the incoming SBI request that is not supported by the NF producer, as per the learned NF profile available at the SCP. | NF selection failed due to an API version mismatch.<br>INVALID_API<br><b>Corrective Actions</b><br>The Consumer NF should send the correct API version in the SBI message URI that is supported by the Producer NF providing the NF service.                                                                                                                                                                      |
| <b>Issue: NF Selection</b><br><b>Error ID:</b> OSCP-WRK-NFSEL-E003<br><b>HTTP Response Code:</b> 400                                                                                                                        | This error ID indicates that the message could not be routed due to unavailability of producer NFs with valid mcc-mnc host (found after Delegated NF Discovery). Therefore, it could not fetch SEPP details.           | Next hop SEPP details were not found after NF discovery for <targetPlmn>.<br>UNSPECIFIED_MSG_FAILURE<br><b>Corrective Actions</b><br>The Consumer NF should send a different value for the 3gpp-sbi-discovery-* headers to enable Inter-PLMN routing.                                                                                                                                                             |
| <b>Issue: NF Selection</b><br><b>Error ID:</b> OSCP-WRK-NFSEL-E004<br>HttpStatusCode is populated based on the configured value for ocscp.http.routing_failure.no_host in RoutingOptions.                                   | This ID indicates that the message could not be routed due to unavailability of serving SEPP for the inter-plmn. This is applicable for both Model-C and Model-D request routing models.                               | The <b>Detail</b> field is set based on the configured value in RoutingOptions against ocscp.http.routing_failure.no_host (for example, eer.getError_response())<br><b>Corrective Actions</b><br>The Consumer NF should send a different value for the 3gpp-sbi-target-apiroot header to enable Inter-PLMN routing.                                                                                               |
| <b>Issue: NF Selection</b><br><b>Error ID:</b> OSCP-WRK-NFSEL-E005<br>HttpStatusCode is populated based on the configured value in the ErrorProfileConfiguration REST API                                                   | This ID indicates that the message could not be routed because the selected producer is congested and there is no other eligible producer available for routing.                                                       | The <b>Cause</b> field is set based on the configured value in the ErrorProfileConfiguration REST API (for example, NFSvcLoadBasedErrorProfileConfiguration.getErrCause())<br><b>Corrective Actions</b><br>The Consumer NF should either send a different value for the headers to enable routing, or resend the request with the same header value once the load on the producer NF returns to a normal level.   |
| <b>Issue: NF Selection</b><br><b>Error ID:</b> OSCP-WRK-NFSEL-E006<br>HttpStatusCode is populated based on the configured value for ocscp.http.routing_failure.resource_exhausted in RoutingOptions, or it defaults to 500. | This ID indicates that the message could not be routed because eligible producers were proactively filtered out due to circuit breaking, outlier detection, egress rate limiting, and so on.                           | The <b>Detail</b> field is populated based on the configured value for ocscp.http.routing_failure.resource_exhausted in RoutingOptions or Destination unreachable due to exhausted destination search.<br><b>Corrective Actions</b><br>Consumer NF should either send a different value for the headers to enable routing, or resend the request with the same header value once the producer NF becomes healthy. |

Table 3-10 (Cont.) SCP-Worker Microservice Error IDs

| Error Details                                                                                                                                                                                                                                                                     | Description                                                                                                                                                              | Possible Causes and Corrective Actions                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: OCI</b><br><b>Error ID:</b> OSCP-WRK-OCI-E001<br>The HttpStatusCode is populated based on the configured value in the ErrorProfile Configuration, if available, or, from the value of <code>ocscp.http.routing_failure.resource_exhausted</code> in the RoutingOptions. | This ID indicates that the message could not be routed because the eligible producer was filtered out for OCI.                                                           | The <b>Detail</b> field is populated based on the configured value in the ErrorProfile Configuration, if available. Alternatively, it is populated using the value for <code>ocscp.http.routing_failure.resource_exhausted</code> in RoutingOptions.<br><b>Corrective Actions</b><br>The consumer NF should either send different header values to facilitate routing or resend the request with the same header values once the OCI reduction criteria are removed from the producer NF. |
| <b>Issue: SCP-W Mediation Interface Errors</b><br><b>Error ID:</b> OSCP-WRK-MEDITN-E001<br>The HttpStatusCode is populated based on the value configured in the ErrorProfile, or 500.                                                                                             | This ID indicates that an error response was received by the SCP-Worker client from the Mediation service.                                                               | The <b>Cause</b> field is populated based on the value configured in <b>AppRoutingOptionsConfig</b> (for example, <code>errorProfileConfig.getErrorCause()</code> ), or <code>continue_processing</code> , or<br>Mediation client errors.<br><b>Corrective Actions</b><br>Ensure that the Mediation service is running and accessible.                                                                                                                                                    |
| <b>Issue: SCP-W Mediation Interface Errors</b><br><b>Error ID:</b> OSCP-WRK-MEDITN-E005<br><b>HTTP Response Code:</b> 500                                                                                                                                                         | This ID indicates that a decode failure occurred when processing the response received from the mediation.                                                               | Failure to decode the mediation message.<br>or<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the appropriate rules are correctly configured in the Mediation.                                                                                                                                                                                                                                                                                                     |
| <b>Issue: Oauth Request</b><br><b>Error ID:</b> OSCP-WRK-OAUTH-E001<br><b>HTTP Response Code:</b> 400                                                                                                                                                                             | This ID indicates that the message could not be routed because the discovery headers, required to obtain the OAuth2 access token, are missing from the received request. | The request cannot be routed due to missing required OAuth2 access token information in the received request.<br>MISSING_ACCESS_TOKEN_INFO<br><b>Corrective Actions</b><br>The consumer NF must include all mandatory headers required for the OAuth token request.                                                                                                                                                                                                                       |
| <b>Issue: Oauth Request</b><br><b>Error ID:</b> OSCP-WRK-OAUTH-E002<br><b>HTTP Response Code:</b> 400                                                                                                                                                                             | This ID indicates that the request could not be routed because OAuth2 access token was not received from consumer NF.                                                    | The request cannot be routed because the OAuth2 access token was not received from the consumer NF.<br>ACCESS_TOKEN_NOT_RECEIVED<br><b>Corrective Actions</b><br>The consumer NF must include the OAuth token when sending an SBI message.                                                                                                                                                                                                                                                |
| <b>Issue: Oauth Request</b><br><b>Error ID:</b> OSCP-WRK-OAUTH-E003<br><b>HTTP Response Code:</b> 400                                                                                                                                                                             | This ID indicates that the message could not be routed due to an invalid OAuth2 access token.                                                                            | The request cannot be routed because the OAuth2 access token is invalid.<br>INVALID_ACCESS_TOKEN<br><b>Corrective Actions</b><br>Ensure that the mandatory headers required to obtain the access token from the NRF are valid.                                                                                                                                                                                                                                                            |
| <b>Issue: Oauth Request</b><br><b>Error ID:</b> OSCP-WRK-OAUTH-E004<br><b>HTTP Response Code:</b> 403                                                                                                                                                                             | This ID indicates that the message could not be routed due to OAuth2 access token being denied.                                                                          | The request cannot be routed because the OAuth2 access token has been denied.<br>ACCESS_TOKEN_DENIED<br><b>Corrective Actions</b><br>The consumer NF should send the SBI message with updated header values in order to request the access token.                                                                                                                                                                                                                                         |

Table 3-10 (Cont.) SCP-Worker Microservice Error IDs

| Error Details                                                                                                                                                                     | Description                                                                                                                                                                                                                            | Possible Causes and Corrective Actions                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: OAuth Request</b><br><b>Error ID:</b> OSCP-WRK-OAUTH-E005<br><b>HTTP Response Code:</b> 500                                                                             | This ID indicates that the message could not be routed because the access token request from the SCP-worker to the SCP-NrfProxy-Oauth service timed out.                                                                               | The access token request timed out from SCP-worker to the SCP-NrfProxy-OAuth service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the scp-nrfproxy-oauth service responds within the specified timeout limit.                                                                                                                                                                       |
| <b>Issue: OAuth Request</b><br><b>Error ID:</b> OSCP-WRK-OAUTH-E006<br><b>HTTP Response Code:</b> 500                                                                             | This ID indicates that the message could not be routed because the access token request from the SCP-worker to the SCP-NrfProxy-Oauth service encountered a transport error.                                                           | The access token request could not be processed due to a transport error between SCP-worker and the SCP-NrfProxy-OAuth service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the scp-nrfproxy-oauth service is running and accessible.                                                                                                                                               |
| <b>Issue: OAuth Request</b><br><b>Error ID:</b> OSCP-WRK-OAUTH-E008<br><b>HTTP Response Code:</b> 500                                                                             | This ID indicates that the message could not be routed because the access token request from SCP-worker to SCP-NrfProxy-Oauth encountered an exception other than TimeoutException, ConnectException, or UnknownHostException.         | The access token request could not be processed due to unknown errors when connecting SCP-worker to the SCP-NrfProxy-OAuth service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the scp-nrfproxy-oauth service is running and accessible.                                                                                                                                           |
| <b>Issue: OAuth Request</b><br><b>Error ID:</b> OSCP-WRK-OAUTH-E009<br><b>HTTP Response Code:</b> 500                                                                             | This ID indicates that the message could not be routed because the access token request from SCP-Worker to SCP-NrfProxy-Oauth failed due to decoding exception in the access token error response body to the ProblemDetails instance. | A failure in decoding the response body into a ProblemDetails instance for the access token request.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the scp-nrfproxy-oauth service returns an error response with the ProblemDetails information element (IE) in the response body.                                                                                                    |
| <b>Issue: Ingress Rate Limiting</b><br><b>Error ID:</b> OSCP-WRK-IRTLMT-E001<br>The HttpStatusCode is populated based on the configured value in the IngressRateLimiter REST API. | This ID indicates that the message could not be routed because the ingress rate was more than the allowed rate configured for the consumer as specified by the rules configured in the Ingress Rate Limiter REST API.                  | The <b>Detail</b> field is populated based on the configured value in the IngressRateLimiter REST API (for example, <code>configData.getErrorResponse().getErrorResponse().NF_CONGESTION_RISK</code> ).<br><b>Corrective Actions</b><br>To address the issue, either reduce the ingress rate or increase the allowed rate in the Ingress Rate Limiter REST API configuration.                                 |
| <b>Issue: Egress Rate Limiting</b><br><b>Error ID:</b> OSCP-WRK-ERTLMT-E001<br>The HttpStatusCode is populated based on the configured value in the EgressRateLimiter REST API.   | This ID indicates that the message could not be routed because the ingress rate was more than the allowed rate configured for the consumer as specified by the rules configured in the Egress Rate Limiter REST API.                   | The <b>Detail</b> field is populated based on the configured value in the EgressRateLimiter REST API (for example, <code>streamInfo.getEgressRateLimitconfigData().getErrorResponse().getErrorResponse()</code> ).<br>NF_CONGESTION_RISK<br><b>Corrective Actions</b><br>To address the issue, either reduce the ingress rate or increase the allowed rate in the Egress Rate Limiter REST API configuration. |



Table 3-10 (Cont.) SCP-Worker Microservice Error IDs

| Error Details                                                                                                                                     | Description                                                                                                                                                                                                                                                                                                                                            | Possible Causes and Corrective Actions                                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Routing</b><br><b>Error ID:</b> OSCP-WRK-ROUTE-E001<br>The HttpStatusCode is populated based on the value configured in RoutingOptions. | This ID indicates that the message could not be routed because a TimeoutException was encountered at the Worker Client while reaching the upstream producer.                                                                                                                                                                                           | The <b>Detail</b> field is populated based on the configured value in RoutingOptions, along with the attempted NF FQDN or IP.<br>TIMED_OUT_REQUEST<br><b>Corrective Actions</b><br>Ensure that the producer NF responds within the timeout limit at SCP, or increase the response timeout limit at SCP. |
| <b>Issue: Routing</b><br><b>Error ID:</b> OSCP-WRK-ROUTE-E002<br>The HttpStatusCode is populated based on the value configured in RoutingOptions. | This ID indicates that the message could not be routed because WebClientRequestException was encountered at the Worker Client while reaching upstream the producer NF. The WebClient exception could be a timeout, a connection failure, or any other error from WebClient.                                                                            | The <b>Detail</b> field is populated based on the configured value in RoutingOptions, including the attempted NF FQDN or IP address.<br>TARGET_NF_NOT_REACHABLE<br><b>Corrective Actions</b><br>Ensure that the producer NF is running and accessible.                                                  |
| <b>Issue: Routing</b><br><b>Error ID:</b> OSCP-WRK-ROUTE-E003<br>The HttpStatusCode is populated based on the value configured in RoutingOptions. | This ID indicates that the message could not be routed due to an exception other than WebClientResponseException, WebClientRequestException, or TimeoutException encountered at the Worker Client while reaching upstream the producer NF.                                                                                                             | The <b>Detail</b> field is populated using the configured value in RoutingOptions, along with the attempted NF FQDN or IP address.<br>TARGET_NF_NOT_REACHABLE<br><b>Corrective Actions</b><br>Ensure that the producer NF is running and accessible.                                                    |
| <b>Issue: Routing</b><br><b>Error ID:</b> OSCP-WRK-ROUTE-E004<br><b>HTTP Response Code:</b> 508                                                   | This ID indicates that the message could not be routed due to the presence of the SCP's self FQDN in the incoming SBI request's <b>Via</b> header. It also suggests that required headers or information, such as target-apiroot, binding headers, discovery headers, or any other necessary routing information, are missing from the request header. | A message loop has been detected.<br><b>Corrective Actions</b><br>Ensure that the SBI message does not contain the self FQDN in the "Via" header.                                                                                                                                                       |
| <b>Issue: Routing</b><br><b>Error ID:</b> OSCP-WRK-ROUTE-E005<br><b>HTTP Response Code:</b> 307 or 308 (as received from upstream NF)             | This ID indicates that the SBI message has been redirected                                                                                                                                                                                                                                                                                             | A 3xx redirection was received from the upstream producer at ` <code>&lt;producer fqdn or IP&gt;</code> `.                                                                                                                                                                                              |

Table 3-10 (Cont.) SCP-Worker Microservice Error IDs

| Error Details                                                                                                                                                                                                         | Description                                                                                                                                                     | Possible Causes and Corrective Actions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Routing</b><br><b>Error ID:</b> OSCP-WRK-ROUTE-E006<br>The HttpStatusCode is populated based on the error response received from the platform service mesh.                                                 | This ID indicates that the message could not be routed due to an error response received from the platform service mesh.                                        | An error response was received from the platform service mesh at <service mesh fqdn or IP>.<br>TARGET_NF_NOT_REACHABLE<br><b>Corrective Actions</b><br>Ensure that the producer NF is online and accessible, and confirm that the platform's service mesh is configured properly.                                                                                                                                                                                                                                                       |
| <b>Issue: Routing</b><br><b>Error ID:</b> OSCP-WRK-ROUTE-E007<br>The HttpStatusCode is set based on the value configured in the RoutingOptions.                                                                       | This ID indicates that the message could not be routed because the total transaction timeout for the service was reached.                                       | The <b>Detail</b> field is populated based on the configured value in RoutingOptions, along with the attempted NF FQDN or IP address.<br>TIMED_OUT_REQUEST<br><b>Corrective Actions</b><br>Ensure that the total transaction timeout is configured correctly and ensure there are no exceptions in the worker logs.                                                                                                                                                                                                                     |
| <b>Issue: Routing</b><br><b>Error ID:</b> OSCP-WRK-ROUTE-E008<br><b>HTTP Response Code:</b> HttpStatusCode is populated based on 'Insufficient_Time' exceptionErrorResponse configured in relevant Routing Config Set | This ID indicates that the message could not be routed due to a request timeout at SCP based on the timeout value received in the 3GPP-sbi-max-rsp-time header. | The request timed out at SCP based on the 3GPP-sbi-max-rsp-time header.<br>TIMED_OUT_REQUEST<br><b>Corrective Actions</b> <ul style="list-style-type: none"> <li>Ensure that the 3gpp-sbi-max-rsp-time value in the ingress SBI request is correct.</li> <li>Verify that the configured responseTimeout value is accurate.</li> <li>Confirm that SCP and NFs are properly time synchronized.</li> <li>Check if the producer NF responds within the time specified in the 3gpp-sbi-max-rsp-time header of the egress request.</li> </ul> |
| <b>Issue: Routing</b><br><b>Error ID:</b> OSCP-WRK-ROUTE-E009<br><b>HTTP Response Code:</b> 500                                                                                                                       | This error indicates that SCP has received a nonstandard HTTP status code from a producer NF.                                                                   | Unknown Status Code<br>UNKNOWN_STATUS_CODE<br><b>Corrective Actions</b><br>No corrective actions available.                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Issue: Delegated Discovery</b><br><b>Error ID:</b> OSCP-WRK-DELDISC-E001<br><b>HTTP Response Code:</b> 500                                                                                                         | This ID indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to TimeoutException.                                          | The delegated discovery request timed out from SCP-worker to the SCP-NrfProxy service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure the scp-nrf-proxy service responds within the specified timeout limit.                                                                                                                                                                                                                                                                                                          |
| <b>Issue: Delegated Discovery</b><br><b>Error ID:</b> OSCP-WRK-DELDISC-E002<br><b>HTTP Response Code:</b> 500                                                                                                         | This ID indicates that the delegated discovery request from the SCP-worker to the SCP-NrfProxy service failed due to a WebClientRequestException.               | Delegated discovery from SCP-worker to the SCP-NrfProxy service failed due to a transport error.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure the scp-nrf-proxy service is running and accessible.                                                                                                                                                                                                                                                                                                                  |



Table 3-10 (Cont.) SCP-Worker Microservice Error IDs

| Error Details                                                                                                                                                      | Description                                                                                                                                                                                               | Possible Causes and Corrective Actions                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Delegated Discovery</b><br><b>Error ID:</b> OSCP-WRK-DELDISC-E004<br><b>HTTP Response Code:</b> 500                                                      | This ID indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to an exception other than TimeoutException, ConnectException, or UnknownHostException.                 | Delegated discovery from SCP-worker to the SCP-NrfProxy service failed due to an unknown error.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure the scp-nrf-proxy service is operational and reachable.                                                                                                                                                                                                                  |
| <b>Issue: Delegated Discovery</b><br><b>Error ID:</b> OSCP-WRK-DELDISC-E005<br><b>HTTP Response Code:</b> 500                                                      | This ID indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to decoding exception in the delegated NF discovery error response body to the ProblemDetails instance. | Failure in decoding the response body into a ProblemDetails instance for delegated discovery.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensures that the scp-nrf-proxy service returns an error response with a problemdetails information element in the response body.                                                                                                                                                  |
| <b>Issue: Pod Overload</b><br><b>Error ID:</b> OSCP-WRK-OVERLD-E001<br>The HttpStatusCode is populated based on the configured value in the ErrorProfile REST API. | This ID indicates that the SCP-worker pod is overloaded due to CPU overload or pending transactions.                                                                                                      | The <b>Cause</b> field is populated based on the configured value in the ErrorProfile REST API, using the method <code>errorProfileConfiguration.getErrorCause()</code> .<br><b>Corrective Actions</b><br>The Consumer NF should send an SBI message to the SCP once it has recovered from the overload situation (either due to CPU usage or pending transactions). This recovery can be verified by monitoring the relevant SCP alerts. |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-WRK-INTRNL-E001<br><b>HTTP Response Code:</b> 500                                                    | This ID indicates that the message could not be routed due to downstream task queue being full.                                                                                                           | The downstream task queue is full.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>The Consumer NF may send the request after some time, once the SCP is able to process the message.                                                                                                                                                                                                                                           |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-WRK-INTRNL-E002<br><b>HTTP Response Code:</b> 500                                                    | This ID indicates that message could not be routed due to an exception caused failure of downstream asynchronous call.                                                                                    | The downstream asynchronous call failed.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the request contains valid data to prevent any exceptions from occurring.                                                                                                                                                                                                                                                  |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-WRK-INTRNL-E003<br><b>HTTP Response Code:</b> 500                                                    | This ID indicates that the message could not be routed due to an exception encountered on the request processing path.                                                                                    | An uncaught exception occurred on the request path, resulting in an internal server error.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the request contains valid data to prevent any exceptions from occurring.                                                                                                                                                                                                |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-WRK-INTRNL-E004<br><b>HTTP Response Code:</b> 500                                                    | This ID indicates that the message could not be routed due to an exception encountered on the response processing path.                                                                                   | An uncaught exception occurred on the response path, leading to an internal server error.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the response contains valid data to prevent any exceptions from occurring.                                                                                                                                                                                                |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-WRK-INTRNL-E005<br><b>HTTP Response Code:</b> 500                                                    | This ID indicates that the message could not be routed due to an exception encountered during SBI message processing.                                                                                     | Unable to process the message due to an unknown error.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that both the request and response contain valid data to prevent any exceptions from occurring.                                                                                                                                                                                                                   |

Table 3-10 (Cont.) SCP-Worker Microservice Error IDs

| Error Details                                                                                                                                  | Description                                                                                                                                                         | Possible Causes and Corrective Actions                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-WRK-INTRNL-E006<br><b>HTTP Response Code:</b> The status code from the producer. | This ID indicates that error rsp(4xx or 5xx) is received from upstream, and the content-type is problem-json but the response body is not in problemdetails format. | Failure in decoding the response body into a ProblemDetails instance.<br><b>Corrective Actions</b><br>Ensure that the producer NF sends a valid ProblemDetails information element in the error response body when the <b>Content-Type</b> is application/problem+json.   |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-WRK-INTRNL-E007<br><b>HTTP Response Code:</b> The status code from the producer. | This ID indicates that error rsp(4xx or 5xx) is received from upstream, but the content-type is not problem-json, application/json, or any other allowed format.    | The Content-Type of the error response is not application/problem+json.<br><b>Corrective Actions</b><br>Ensure that the producer NF sends a valid ProblemDetails information element in the error response body when the <b>Content-Type</b> is application/problem+json. |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-WRK-INTRNL-E008<br><b>HTTP Response Code:</b> 500                                | This ID indicates that Live Object pool is exhausted.                                                                                                               | The live object pool is exhausted.<br><b>Corrective Actions</b><br>Ensure the object pool can adjust to instance creation and reclamation requests, or increase the pool size as needed.                                                                                  |

Table 3-11 SCP OAUTH MICROSERVICE

| Error Details                                                                                                 | Description                                                                                                                                                                                                 | Possible Causes and Corrective Actions                                                                                                                                                                                               |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Access Token Request</b><br><b>Error ID:</b> OSCP-OAU-TKNREQ-E001<br><b>HTTP Response Code:</b> 500 | This ID indicates that NrfProxy-OAuth timed out while attempting to connect to the Worker to initiate the OAuth request towards NRF.                                                                        | The access token request timed out at the NrfProxy-OAuth service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the worker sends a response within the response timeout limit at the NrfProxy-OAuth service. |
| <b>Issue: Access Token Request</b><br><b>Error ID:</b> OSCP-OAU-TKNREQ-E002<br><b>HTTP Response Code:</b> 500 | This ID indicates that NrfProxy-OAuth failed to connect to the Worker to initiate the OAuth request towards NRF due to a WebClientRequestException.                                                         | The access token request failed due to a transport error at the NrfProxy-OAuth service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the worker is up and reachable for successful communication.           |
| <b>Issue: Access Token Request</b><br><b>Error ID:</b> OSCP-OAU-TKNREQ-E004<br><b>HTTP Response Code:</b> 500 | This ID indicates that NrfProxy-OAuth failed to connect to the Worker to initiate the OAuth request towards NRF due to an exception other than TimeoutException, ConnectException, or UnknownHostException. | The access token request failed due to an unknown error at the NrfProxy-OAuth service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the worker is up and reachable.                                         |

Table 3-11 (Cont.) SCP OAUTH MICROSERVICE

| Error Details                                                                                                   | Description                                                                                                                                                                                                                  | Possible Causes and Corrective Actions                                                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Access Token Response</b><br><b>Error ID:</b> OSCP-OAU-TKNRSP-E001<br><b>HTTP Response Code:</b> 403  | This ID indicates that the NrfProxy-OAuth service received a 400 Bad Request with an AccessTokenError payload from NRF for the access token request, and SCP converts it to a 403 with a ProblemDetails information element. | The request cannot be routed due to the rejection of the access token request by the NRF.<br><b>ACCESS_TOKEN_DENIED</b><br><b>Corrective Actions</b><br>Ensure that the Consumer NF sends the access token request with valid headers and parameters.                |
| <b>Issue: Access Token Response</b><br><b>Error ID:</b> OSCP-OAU-TKNRSP-E002<br><b>HTTP Response Code:</b> 403  | This ID indicates that the NrfProxy-OAuth service received a 200 response from NRF with an access token payload that is expired, and SCP converts it to a 403 with a ProblemDetails information element.                     | An expired access token was received from the NRF, with an expiration time of <exp-time>.<br><b>ACCESS_TOKEN_DENIED</b><br><b>Corrective Actions</b><br>Ensure that valid request and response data is received by the NrfProxy-OAuth service for proper processing. |
| <b>Issue: Access Token Response</b><br><b>Error ID:</b> OSCP-OAU-TKNRSP-E003<br><b>HTTP Response Code:</b> 504  | This ID indicates that the NrfProxy-OAuth service received a 307 response from NRF via the worker. SCP converts it to a 504, NRF_NOT_REACHABLE with `ProblemDetails` information element.                                    | The SCP could not obtain access from the NRF. The access token request failed because NRFs were not reachable.<br><b>NRF_NOT_REACHABLE</b><br><b>Corrective Actions</b><br>Ensure that the NRFs configured for the access token procedure are reachable.             |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-OAU-INTRNL-E001<br><b>HTTP Response Code:</b> 500 | This ID indicates that an exception was encountered while processing the access token request.                                                                                                                               | An uncaught exception occurred on the server, leading to an internal server error.<br><b>UNSPECIFIED_NF_FAILURE</b><br><b>Corrective Actions</b><br>Ensure that valid request and response data is received by the NrfProxy-OAuth service for correct processing.    |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-OAU-INTRNL-E002<br><b>HTTP Response Code:</b> 500 | This ID indicates that a downstream thread in the NrfProxy-OAuth service is stuck while processing the access token request.                                                                                                 | The downstream thread for the Nrf-Proxy-OAuth service experienced a timeout.<br><b>UNSPECIFIED_NF_FAILURE</b><br><b>Corrective Actions</b><br>Ensure that the NrfProxy-OAuth service receives valid request and response data for proper processing.                 |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-OAU-INTRNL-E003<br><b>HTTP Response Code:</b> 500 | This ID indicates that an exception was encountered while processing the access token request or response.                                                                                                                   | The message could not be processed due to an unknown error.<br><b>UNSPECIFIED_NF_FAILURE</b><br><b>Corrective Actions</b><br>Ensure that the NrfProxy-OAuth service receives valid request and response data to ensure correct processing and avoid errors.          |

Table 3-12 SCP NRF-PROXY MICROSERVICE

| Error Details                                                                                                         | Description                                                                                                                                                                                                             | Possible Causes and Corrective Actions                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Delegated Discovery Request</b><br><b>Error ID:</b> OSCP-NPY-DISREQ-E001<br><b>HTTP Response Code:</b> 500  | This ID indicates that the NrfProxy timed out while attempting to connect to the Worker to initiate the delegated discovery request towards NRF.                                                                        | The delegated NF discovery request timed out at the NrfProxy service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure the worker sends a response within the specified response timeout limit.                                                                                  |
| <b>Issue: Delegated Discovery Request</b><br><b>Error ID:</b> OSCP-NPY-DISREQ-E002<br><b>HTTP Response Code:</b> 500  | This ID indicates that the NrfProxy failed to connect to the Worker to initiate the delegated discovery request towards NRF due to a WebClientRequestException.                                                         | The delegated NF discovery request failed due to a transport error at the NrfProxy service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the worker is up and reachable.                                                                                                |
| <b>Issue: Delegated Discovery Request</b><br><b>Error ID:</b> OSCP-NPY-DISREQ-E004<br><b>HTTP Response Code:</b> 500  | This ID indicates that the NrfProxy failed to connect to the Worker to initiate the delegated discovery request towards NRF due to an exception other than TimeoutException, ConnectException, or UnknownHostException. | The delegated NF discovery request failed due to an unknown error at the NrfProxy service.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the worker is up and reachable.                                                                                                 |
| <b>Issue: Delegated Discovery Request</b><br><b>Error ID:</b> OSCP-NPY-DISREQ-E005<br><b>HTTP Response Code:</b> 500  | This ID indicates that the NrfProxy could not find the cache key, and as a result, was unable to process the delegated discovery request.                                                                               | The cache key was not received from the SCP-Worker.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that the cache key is generated at the scp-worker and sent to the scp-nrfproxy service.                                                                                     |
| <b>Issue: Delegated Discovery Request</b><br><b>Error ID:</b> OSCP-NPY-DISREQ-E006<br><b>HTTP Response Code:</b> 500  | This ID indicates that the NrfProxy could not find the cache for the delegated discovery response due to an exception encountered during JSON parsing.                                                                  | An exception occurred while parsing the delegated NF discovery cached response into a JSON array.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that valid response data is cached in the scp-nrfproxy service.                                                               |
| <b>Issue: Delegated Discovery Response</b><br><b>Error ID:</b> OSCP-NPY-DISRSP-E001<br><b>HTTP Response Code:</b> 400 | This ID indicates that an empty list of NF profiles was received in the delegated NF discovery response.                                                                                                                | An empty list of NF profiles was received in the delegated NF discovery response.<br>NF_DISCOVERY_FAILURE<br><b>Corrective Actions</b><br>The Consumer NF should send different values for the 3gpp-sbi-discovery-* headers to ensure that the delegated discovery returns a non-empty response. |
| <b>Issue: Delegated Discovery Response</b><br><b>Error ID:</b> OSCP-NPY-DISRSP-E002<br><b>HTTP Response Code:</b> 500 | This ID indicates that no response was received for the delegated NF discovery.                                                                                                                                         | No response was received for the delegated NF discovery.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that valid response data is received by the scp-nrfproxy service.                                                                                                      |
| <b>Error ID:</b> OSCP-NPY-DISRSP-E003<br><b>HTTP Response Code:</b> 500                                               | This ID indicates that the NrfProxy failed to build the delegated NF discovery response.                                                                                                                                | Failed to build the delegated NF discovery response.<br>UNSPECIFIED_NF_FAILURE<br><b>Corrective Actions</b><br>Ensure that valid response data is received by the scp-nrfproxy service for processing.                                                                                           |

Table 3-12 (Cont.) SCP NRF-PROXY MICROSERVICE

| Error Details                                                                                                         | Description                                                                                                           | Possible Causes and Corrective Actions                                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Delegated Discovery Response</b><br><b>Error ID:</b> OSCP-NPY-DISRSP-E004<br><b>HTTP Response Code:</b> 500 | This ID indicates that validation failed for the NF profiles received in the delegated NF discovery response.         | Validation of the NF profiles received in the delegated NF discovery response failed.<br><b>UNSPECIFIED_NF_FAILURE</b><br><b>Corrective Actions</b><br>Ensure that a response with valid NF profiles data is received by the scp-nrfproxy service. |
| <b>Issue: Delegated Discovery Response</b><br><b>Error ID:</b> OSCP-NPY-DISRSP-E005<br><b>HTTP Response Code:</b> 500 | This ID indicates that there was a failure in deserializing the delegated NF discovery response.                      | Failed to deserialize the delegated NF discovery response.<br><b>UNSPECIFIED_NF_FAILURE</b><br><b>Corrective Actions</b><br>Ensure that valid response data is properly cached in the scp-nrfproxy service.                                        |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-NPY-INTRNL-E001<br><b>HTTP Response Code:</b> 500       | This ID indicates that the asynchronous call failed in the NrfProxy service for the delegated NF discovery request.   | The asynchronous call for the delegated NF discovery request failed.<br><b>UNSPECIFIED_NF_FAILURE</b><br><b>Corrective Actions</b><br>Ensure that valid response data is successfully received by the scp-nrfproxy service for processing.         |
| <b>Issue: Internal Server Errors</b><br><b>Error ID:</b> OSCP-NPY-INTRNL-E002<br><b>HTTP Response Code:</b> 500       | This ID indicates that the NrfProxy service failed to process the delegated NF discovery request due to an exception. | The NrfProxy service failed to process the delegated NF discovery request.<br><b>UNSPECIFIED_NF_FAILURE</b><br><b>Corrective Actions</b><br>Ensure that valid response data is received by the scp-nrfproxy service and processed correctly.       |

Table 3-13 SCP NOTIFICATION MICROSERVICE

| Error Details                                                                                                | Description                                                                                                                                           | Possible Causes and Corrective Actions                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Issue: Profile Validations</b><br><b>Error ID:</b> OSCP-NTF-PRFVLD-E001<br><b>HTTP Response Code:</b> 400 | This ID indicates that NF profile received from NRF is invalid as it contains both nfProfile and profileChange elements for NF_PROFILE_CHANGED event. | <b>Problem Cause:</b> The NF profile received from the NRF is invalid because it contains both nfProfile and profileChange for the NF_PROFILE_CHANGED event.<br><b>INVALID_REQUEST_BODY</b><br><b>Corrective Actions</b><br>NRF should send only the <b>profileChange</b> attribute for the NF_PROFILE_CHANGED event. |
| <b>Issue: Profile Validations</b><br><b>Error ID:</b> OSCP-NTF-PRFVLD-E002<br><b>HTTP Response Code:</b> 400 | This ID indicates that NF profile received from NRF is missing some mandatory parameters amongst event, nfType, nfStatus, and nfInstanceId.           | The NF profile received from the NRF is missing some mandatory parameters, including event, nfType, nfStatus, and nfInstanceId.<br><b>MANDATORY_IE_MISSING</b><br><b>Corrective Actions</b><br>NF profiles sent by NRF must include all mandatory fields.                                                             |
| <b>Issue: Profile Validations</b><br><b>Error ID:</b> OSCP-NTF-PRFVLD-E003<br><b>HTTP Response Code:</b> 400 | This ID indicates that the NF profile received from NRF has an invalid JSON format.                                                                   | The NF profile received from the NRF has an invalid JSON format.<br><b>INVALID_MSG_FORMAT</b><br><b>Corrective Actions</b><br>NF profiles sent by NRF must contain valid JSON content.                                                                                                                                |



## 3.7 Log Enhancement for 5G SBI Error Responses Generated by SCP

SCP generates error responses for all the routing attempts made on the producer NFs when SCP does not receive any response after performing alternate routing on all the available producer NFs. The `ProblemDetails` parameter of the error response contains the required pieces of information to find the cause of the error. For more information about error response enhancement, see [Error Response Enhancement](#).

With the introduction of the Log Enhancement for 5G SBI Error Responses Generated by SCP feature, error response logs have been enhanced to include information, such as sender of the response and the User Equipment (UE) identifier received from the `3gpp-Sbi-Correlation-Info` header, in the error logs. These details, along with the problem details, identify the cause of the error responses generated by SCP.

SCP generates error responses, and SCP-Worker generates error logs by adding additional attributes to the logs during the following scenarios:

- When there is no eligible producer NF available to route the message request.
- When all the routing attempts lead to request timeouts.
- When connection between SCP and producer NFs fails.
- When SCP disqualifies producer NFs because the `Overload-Reduction-Metric` value is less than 100.
- When SCP returns bad requests to consumer NFs due to discovery failure.
- When SCP returns error responses to consumer NF due to Access Token denial by NRF for a producer NF.

SCP-Worker adds additional log attributes, such as `errorStatus`, `errorTitle`, `errorDetails`, `errorCause`, and `sender`, to error logs to identify the cause of the error responses generated by SCP for WARN level logs. These attributes can be used to refine the search option to identify the cause of an error by analyzing any log on Kibana and Opensearch. These attributes are managed by the `additional_logging` REST API parameter as described in "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. By default, `additional_logging` is disabled. For more information about additional log attributes, see [Table 3-14](#).

**Note**

- This feature is not applicable if the log level is updated from the default WARN level to ERROR.
- The additional log attributes are added only to SCP-Worker logs.
- When CPU usage of SCP reaches Critical state, additional logging is not performed.
- The errorDetails attribute provides a summary of all the routing attempts made by SCP, whether the Error Response Enhancement feature is enabled or disabled.
- When additional\_logging is enabled, SCP logs might spillover because repeated errors could be logged, leading to spillover and loss of other log information from other transactions. It is recommended to use log rate control or enable this feature only when required.

The following sample log contains additional attributes present in the error logs generated by SCP:

```
{"errorStatus":"504",  
  
  "errorTitle":"Transport failure at SCP",  
  
  "errorDetails":"ocscp-scp-worker.scpsvc.svc.cluster.local:Gateway Timeout  
for smf12svc.scpsvc.svc.cluster.local due to UnknownHostException:OSCP-WRK-  
ROUTE-E002",  
  
  "errorCause":"TARGET_NF_NOT_REACHABLE",  
  
  "sender":"SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"}
```

Subscriber ID (UE identifier) is added to all logs, irrespective of the log generated by SCP or any other component. It is derived from the subscriberId attribute of the log. The value of subscriberId is obtained from the 3gpp-Sbi-Correlation-Info header if it is present in the message request received from the consumer NF. Otherwise, subscriberId is automatically removed from the logs. For more information about 3gpp-Sbi-Correlation-Info, see *3GPP TS 29.500 v17.12.0*.

The subscriberId attribute is managed by the log\_subscriber\_info REST API parameter as described in "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. subscriberId is appended to all the SCP logs for that particular transaction if the 3gpp-Sbi-Correlation-Info header is present in the message request and log\_subscriber\_info is enabled.

**Note**

- subscriberId is applicable only for SCP-Worker, SCP-nrfProxy, and SCP-nrfproxy-oauth logs.
- Any sensitive information in the form of a UE identifier (ex. SUPI) is published when log\_subscriber\_info is enabled. It is not recommended to enable this feature. You can secure the logs accordingly in the deployment environment when this feature is enabled.

**Sample Logs**

When both log\_subscriber\_info and additional\_logging parameters are enabled:

```
{
  "instant": {
    "epochSecond": 1716451983,
    "nanoOfSecond": 70825540
  },
  "thread": "scp-wk-nrfproxy-downstream-19",
  "level": "WARN",

  "loggerName": "com.oracle.cgbu.cne.scp.router.common.logging.WorkerLogBuilder",
  "message": "Category: ROUTING, Event: ROUTING_MISCELLANEOUS, Details: SCP  
Generated Error Details in Final Response to Consumer NF",

  "endOfBatch": false, "loggerFqn": "org.apache.logging.log4j.spi.AbstractLogger",
  "threadId": 927, "threadPriority": 5,
  "messageId": "a5322c9c-f110-4b77-8665-ec54ee76dee4", "scpFqdn": "ocscp-scp-  
worker.scpsvc.svc.cluster.local", "scpAuthority": "",

  "messageTimestamp": "2024-05-23T08:13:03.070+0000", "application": "ocscp", "micro  
service": "scp-worker", "engVersion": "24.2.0-OCSPF-23002-  
elog-240522144106-181a1bc6",

  "mktgVersion": "24.2.0.0.0", "vendor": "oracle", "namespace": "scpsvc", "node": "100.  
77.4.253",
  "pod": "ocscp-scp-worker-6c5b88b795-  
xlqgj", "subsystem": "router", "instanceType": "prod", "processId": "1",
  "subscriberId": "imsi-345012123123123",
  "errorStatus": "500",
  "errorTitle": "Internal Server Error",
  "errorDetails": "ocscp-scp-worker.scpsvc.svc.cluster.local:Access Token  
request failed due to transport error at NrfProxy-Oauth service:OSCP-OAU-  
TKNREQ-E002",
  "errorCause": "UNSPECIFIED_NF_FAILURE",
  "sender": "SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"
}
```

When log\_subscriber\_info is disabled, but additional\_logging is enabled:

```
{
  "instant": {
    "epochSecond": 1716451983,
    "nanoOfSecond": 70825540
  },
  "thread": "scp-wk-nrfproxy-downstream-19",
  "level": "WARN",

  "loggerName": "com.oracle.cgbu.cne.scp.router.common.logging.WorkerLogBuilder",
  "message": "Category: ROUTING, Event: ROUTING_MISCELLANEOUS, Details: SCP  
Generated Error Details in Final Response to Consumer NF",

```



```

"endOfBatch":false,"loggerFqn":"org.apache.logging.log4j.spi.AbstractLogger",
"threadId":927,"threadPriority":5,
"messageId":"a5322c9c-f110-4b77-8665-ec54ee76dee4","scpFqdn":"ocscp-scp-
worker.scpsvc.svc.cluster.local","scpAuthority":"","

"messageTimestamp":"2024-05-23T08:13:03.070+0000","application":"ocscp","micro
service":"scp-worker","engVersion":"24.2.0-OCSPF-23002-
elog-240522144106-181a1bc6",

"mktgVersion":"24.2.0.0.0","vendor":"oracle","namespace":"scpsvc","node":"100.
77.4.253",
"pod":"ocscp-scp-worker-6c5b88b795-
xlqgj","subsystem":"router","instanceType":"prod","processId":"1",
"errorStatus":"500",
"errorTitle":"Internal Server Error",
"errorDetails":"ocscp-scp-worker.scpsvc.svc.cluster.local:Access Token
request failed due to transport error at NrfProxy-Oauth service:OSCP-OAU-
TKNREQ-E002",
"errorCause":"UNSPECIFIED_NF_FAILURE",
"sender":"SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"}

```

### Additional Log Attributes

The following table describes additional log attributes that are appended to the error logs:

**Table 3-14 Additional Log Attributes**

| Attribute    | Description                                                                                                                                                                                                                                                                                 |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| subscriberId | Indicates the User Equipment (UE) identifier and the value of this parameter is determined from the 3gpp-Sbi-Correlation-Info header in the message request.<br><b>Example:</b> "subscriberId": "imsi-345012123123123"<br><b>Note:</b> The value of subscriberId cannot be modified by SCP. |
| sender       | This is SCP FQDN.<br><b>Example:</b> "sender":"SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"                                                                                                                                                                                               |
| errorStatus  | Indicates the status code of the error response.<br><b>Example:</b> "errorStatus":"500"                                                                                                                                                                                                     |
| errorTitle   | Indicates the error title of the error response.<br><b>Example:</b> "errorTitle":"Internal Server Error"                                                                                                                                                                                    |
| errorDetails | Indicates the error details of the error response.<br><b>Example:</b> "errorDetails":"ocscp-scp-worker.scpsvc.svc.cluster.local:Access Token request failed due to transport error at NrfProxy-Oauth service:OSCP-OAU-TKNREQ-E002"                                                          |
| errorCause   | Indicates the error cause of the error response.<br><b>Example:</b> "errorCause":"UNSPECIFIED_NF_FAILURE"                                                                                                                                                                                   |

### Managing Log Enhancements

#### Enable

This feature is disabled at the time of SCP deployment. You can enable or disable this feature using the CNC Console as described in [Configuring the Log Enhancement Feature](#).

#### Configure

You can configure this feature using CNC Console and REST APIs.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring the Log Enhancement Feature](#).
- **Configure using REST APIs:** For information about configuring additional\_logging and log\_subscriber\_info REST API parameters, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

There are no specific metrics and alerts required for this feature.

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).


## 3.8 NFProfile Processing Enhancements

In the previous releases, SCP did not support custom NF services. When SCP receives a notification from NRF about an NF profile that has 3GPP-defined supported NF services along with custom, unknown, or unsupported NF services, it will reject the whole NF profile. Therefore, routing rules were not generated for 3GPP-defined supported NF services when a custom, unknown, or unsupported NF service was present in the NF profile.

With this enhancement, whenever SCP receives a notification regarding an NF profile that includes 3GPP-defined supported NF services, custom, unknown, or unsupported NF services, SCP ignores the presence of custom, unknown, or unsupported NF services within the NF profile. Routing rules are generated by SCP for 3GPP-defined SCP supported NF services that are present in the NF profile. Consequently, SCP enhanced the process of handling NF profiles by streamlining the routing process and ensuring efficient and reliable communication between NFs.

SCP can receive custom, unknown, or unsupported NF services in the NF profile for 3GPP-defined NF types in the following cases:

- Notification from NRF: This is within the scope of this feature.
- Audit functionality using NRF management or discovery service: This is within the scope of this feature.
- Response for delegated discovery from NRF: This is outside the scope of this feature.

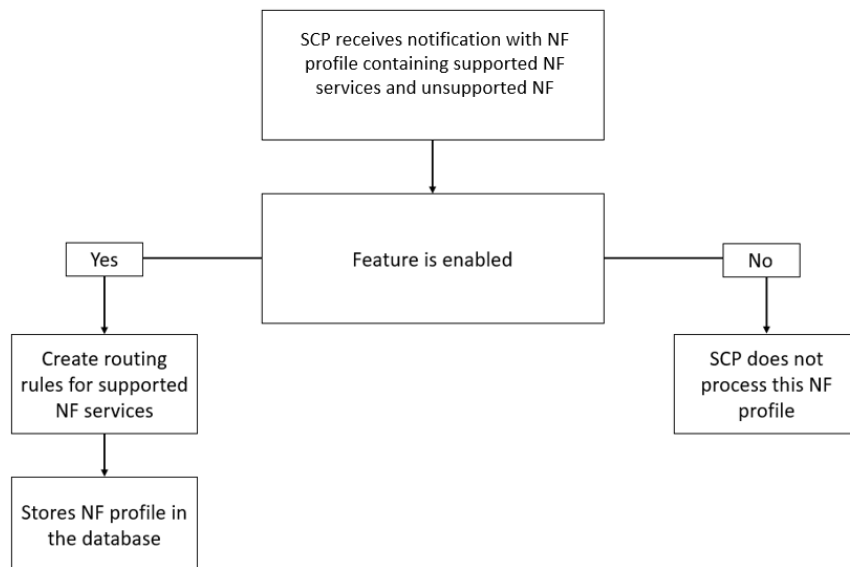**Figure 3-1 Call Flow of NFProfile Processing**

1. SCP receives a notification with an NF profile including 3GPP-defined supported NF services, custom, unknown, or unsupported NF services.
2. If the feature is enabled, then SCP creates routing rules for the 3GPP-defined supported NF services and ignores the custom, unknown, or unsupported NF services present in the NF profile.
3. SCP stores the NF profile in the database.
4. If the feature is disabled, then SCP does not process that NF profile and no routing rules will be created for that NF profile.  
This call flow ensures that SCP appropriately handles notifications and routing rules procedures with supported NF services while disregarding unsupported services.

## Managing NFProfile Processing Enhancements

### Enable

You can enable this feature by setting the **ignore\_unknown\_nfservice** parameter to true. For more information, see [Configuring Enhanced NFProfile Processing](#)

### Configure

You can enable this feature using the CNC Console or REST API.

- **Configure using CNC Console:** For more information about CNC Console configurations, see [Configuring Enhanced NFProfile Processing](#).
- **Configure using REST API:** For information about REST API configurations, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

- Added the `ocscp_ignore_unknown_service_total` metric in the [SCP Metrics](#) section.
- Added the [SCPIgnoreUnknownService](#) in the [Alerts](#) section.

## Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.9 Support for cnDBTier APIs on the CNC Console

With the implementation of this feature, cnDBTier APIs are integrated into the CNC Console, and SCP users can view specific cnDBTier APIs, such as checking the cnDBTier version, status of cnDBTier clusters, and georeplication status on the CNC Console.

The following cnDBTier APIs are read only and can be viewed in CNC Console:

- **Backup List:** This API displays the details of stored backups, such as the ID and size of the backup.
- **cnDBTier Backup Status:** This API checks the cnDBTier backup status.
- **cnDBTier version:** This API displays the cnDBTier version.
- **Database Statistics Report:** This API displays the number of available database.
- **Georeplication Recovery:** This API provides the recovery status of georeplication for the cnDBTier cluster:
  - **Update Cluster As Failed:** This API is used to mark a disrupted cluster as failed.
  - **Start Georeplication Recovery:** This API is used to start the georeplication recovery process.
  - **Georeplication Recovery Status:** This API is used to monitor the recovery status of georeplication for both FAILED and ACTIVE cnDBTier sites.
- **Georeplication Status:**
  - **Real Time Overall Replication Status:** This API displays the overall replication status in multisite deployments. For example, in a four-site deployment, it provides the replication status between the following sites: site1-site2, site1-site3, site1-site4, site2-site3, site2-site4, and site2-site1. This is applicable for all other sites.
  - **Site Specific Real Time Replication Status:** This API displays the site-specific replication status.
- **Replication HeartBeat Status:** This API displays the connectivity status between the local site and the remote site name to which SCP is connected.
- **Local Cluster Status:** This API displays the status of the local cluster.
- **On-Demand Backup:** This API displays the status of initiated on-demand backups.
- **cnDBTier Health:** This API displays the health status of the following services:
  - **Replication Health Status:** This API displays the health status of the replication service. It checks the following:
    - \* if the replication service is up or not
    - \* if the replication service can connect to database or not

- Monitor Health Status: This API displays the health status of the monitor service. It checks the following:
  - \* if the monitor service is up or not
  - \* if the service can connect to database or not
  - \* if the metrics are fetched or not (the metrics are fetched when the service is up and vice versa)
- NDB Health Status: This API displays the health status of the NDB service pods like (data pods, sql pods, app-my-sql pods, mgmt pods). It checks the following:
  - \* if the pod is connected to PVC or not
  - \* if the pods status is up or not

#### Note

PVC Health Status attribute is set to NA when some of the database pods are not connected to the PVC.

- Backup Manager Health Status: This API displays the health status of the backup manager service. It checks the following:
  - \* if the backup manager service is up or not
  - \* if the service can connect to database or not

### Managing cnDBTier APIs at CNC Console

#### Enable

This feature is enabled automatically when cnDBTier is configured as an instance during the CNC Console deployment. For more information about integrating cnDBTier APIs in CNC Console, see *Oracle Communications Cloud Native Core, cnDBTier User Guide*.

#### Configure

You can view cnDBTier APIs at CNC Console in the [Viewing cnDBTier APIs on the CNC Console](#) section.

#### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.10 NRF Configuration Using DNS SRV Resolution

Currently, SCP supports the static configuration (helm configuration) of NRF profiles from the `custom-values.yaml` file and uses them for registration, subscription, discovery, and audit.

With the introduction of this feature, SCP supports the configuration (RESTful) of NRF Service (SRV) FQDN at SCP. SCP uses this Domain Name System Service (DNS) SRV Resource record, known as Service Proto Name (SPN), to query the DNS server to locate the actual

target NRF FQDNS (DNS SRV NRF FQDN). Thus, the user can configure primary (mandatory), secondary, and tertiary NRFs based on their priority and weights from different regions in the DNS server against a NRF SRV FQDN.

During migration, SCP deregisters and unsubscribes from static NRFs to update the NRF details stored statically at SCP with DNS SRV NRFs. Hence, it creates new rules for DNS SRV NRFs and deletes old static NRF rules. SCP instructs Audit microservice to perform an on-demand audit. The user can configure the DNS SRV and update all the data in the database for subscription, registration, discovery, and audit services. Configuration of different NRF SRV FQDN's with duplicate nfsetIds is not allowed. SCP allows users to configure multiple nfsetIDs, provided they are unique, but SCP will support only the 0th nfsetID.

To use the same NFInstance ID from the static NRF config, the following conditions must be met:

- The NF set ID should match
- NF service counts should match, and NF service FQDNs should also match

Hence, if the LCI comes from NRF against a different nfinstanceID, SCP will ignore the received LCI header as unknown.

NRFs are configured on the DNS server or stub against the NRF SRV FQDN. These NRFs should have PLMN IDs in the FQDN value matching the serving PLMN IDs of SCP. Setting the `isInterPLMnfqdn` to true will enable InterPLMN request routing coming from a foreign PLMN to SUT SCP. SCP will be able to perform intra-PLMN routing to local NRFs based on the `interplmnFQDN`. If `isInterPLMnfqdn` is set to false, the above-mentioned routing will not be performed if the Inter-PLMN request for Intra-PLMN routing is received with only 3gpp-Sbi-Target-apiRoot and no additional information, such as a routing binding header.

#### Note

SCP never performs InterPLMN routing through SEPP for NRF as a destination, which is learned through DNSSRV.

#### Note

To avoid the loss of service, it is recommended that the user configure the same static target FQDN and NFSetID in the DNS SRV configuration, which are configured for Support for Model D and Support for OAuth2.0 Feature.

If the same target NRF FQDN is detected against different NRF SRV FQDNs, the `ocscp_configuration_dnssrv_nrf_duplicate_target_detected` metric is pegged, where the value of `nrfSrvFqdn` indicates the NRF SRV FQDN against which a duplicate target NRF is detected.

## Managing NRF Configuration using DNS SRV Resolution

### Enable

During deployment:

Set the `enableDnsBasedNrfBootstrapInfoFeature` to true and provide the NRF SRV Config under the `nrfSrvConfiguration` field of the deployment file to enable the DNS SRV NRF feature during fresh deployment.

Sample of changes in deployment file:

```
#-----NRF Bootstrapping based on DNS SRV-----#
#Enable/Disable nrf_bootstrap_info feature
  enableDnsBasedNrfBootStrapInfoFeature : false
  deRegisterScpDuringMigration: false

#Preferred DNSSRV NrfSetId to be used for on demand discovery when
nrf_bootstrap_info feature is enabled during deployment
  preferredDNSSRVNrfSetIdForOnDemandDiscovery:
["setnrf11.nrfset.5gc.mnc012.mcc345"]

#Configure NRF Configuration using DNS SRV Resolution when the
nrf_bootstrap_info feature is enabled.
  nrfSrvConfiguration:
    - nrfSrvFqdn: nrf1svc.scpsvc.svc.cluster.local
      data:
        "v1":
          nfSetIdList:
            - "setnrf11.nrfset.5gc.mnc012.mcc345"
          #plmnList:
          # - mcc: 330
          #   mnc: 143
          performSubscription: true
          performAudit: true
          registerScp: true
          scheme: http
          #apiPrefix: USEast
          versions:
            - apiVersionInUri: v1
              apiFullVersion: 1.0.0
          serviceNames:
            - nnrf-nfm
            - nnrf-disc
            - nnrf-oauth2
          isInterPlmnFqdn: false
```

For more information, refer *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

By default, this feature is disabled. You can use the `nrf_bootstrap_info` option to enable or disable NRF configuration using the DNS SRV resolution feature and its configurations as described in [Configuring NRF SRV](#).

#### ① Note

DNS SRV alternate routing feature should be enabled to enable NRF Configuration using DNS SRV Resolution feature.

## Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about configuring this feature, see the [Configuring NRF SRV](#) and [Mapping NFIstanceld and ServiceInstanceld](#) sections. To view the runtime status of NRF migration task, see the [Viewing SCP Feature Status](#) Status section.
- **Configure using REST API:**  
You can configure this feature using REST APIs as described in "Configuring SCP Features", "SCP NRF SRV Configuration", and "SCP NRF FQDN InstanceId Mapping". You can view the runtime status of NRF migration task in the "Viewing SCP Feature Status" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_configuration_dnssrv_nrf_non_migration_task_failure_count_total`
- `ocscp_configuration_dnssrv_nrf_non_migration_task_success_count_total`
- `ocscp_configuration_dnssrv_nrf_non_migration_task_failure`
- `ocscp_configuration_dnssrv_nrf_migration_task_failure`
- `ocscp_configuration_dnssrv_nrf_duplicate_target_detected`

The following alerts are added in the [Alerts](#) section:

- [SCPDNSSRVNRFMigrationTaskFailure](#)
- [SCPDNSSRVNRFNonMigrationTaskFailure](#)
- [SCPDNSSRVNRFDuplicateTargetDetected](#)

### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.11 Support for Kubernetes Resources

This section provides you with information about the Network Policies feature and the Pod Disruption Budget feature.

### 3.11.1 Support for Dual Stack

Using the dual stack mechanism, applications or NFs can establish connections with pods and services in a Kubernetes cluster using IPv4 or IPv6 or both simultaneously. Dual stack provides:

- coexistence strategy that allows hosts to reach IPv4 and IPv6 simultaneously.
- IPv4 and IPv6 allocation to the Kubernetes clusters during cluster creation. This allocation is applicable for all the Kubernetes resources unless explicitly specified during the cluster creation.



SCP can be deployed on CNE that supports dual stack networking. In case both IPv4 and IPv6 addresses are present in the IPADDRESS route group REST API configuration or NFService's IPEndpoint, the load balancing mechanism is used to route the traffic between IPv4 and IPv6. For more information about IPADDRESS, see "Configuring Route Groups" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

SCP supports dual stack networking on the Aspen Service Mesh (ASM) setup so that SCP with sidecar can establish connections with pods and services using IPv4 or IPv6 or both simultaneously. For more information about enabling dual stack for ASM, see "Enabling Dual Stack Networking for ASM" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

## Managing Dual Stack

### Enable

To enable Dual Stack, perform a fresh installation of SCP. An upgrade from a single stack to a dual stack is not supported.

### Configuring IpFamilyPolicy and IpFamilies

1. To configure IpFamilyPolicy and IpFamilies, the following Helm parameters can be configured:
  - serviceIpFamilyPolicy.scpcAudit
  - serviceIpFamilyPolicy.scpcConfiguration
  - serviceIpFamilyPolicy.scpcSubscription
  - serviceIpFamilyPolicy.scpcNotification
  - serviceIpFamilyPolicy.scpcAlternateResolution
  - serviceIpFamilyPolicy.scpCache
  - serviceIpFamilyPolicy.scpNrfProxyOAuth
  - serviceIpFamilyPolicy.scpNrfproxy
  - serviceIpFamilyPolicy.scpWorker
  - serviceIpFamilyPolicy.scpMediation
  - serviceIpFamilyPolicy.scpMediationTest
  - serviceIpFamilyPolicy.scpcLoadManager
  - serviceIpFamilies.scpcAudit
  - serviceIpFamilies.scpcConfiguration
  - serviceIpFamilies.scpcSubscription
  - serviceIpFamilies.scpcNotification
  - serviceIpFamilies.scpcAlternateResolution
  - serviceIpFamilies.scpCache
  - serviceIpFamilies.scpNrfProxyOAuth
  - serviceIpFamilies.scpNrfproxy
  - serviceIpFamilies.scpWorker
  - serviceIpFamilies.scpMediation

- `serviceIpFamilies.scpMediationTest`
  - `serviceIpFamilies.scpLoadManager`
  - `serviceSpecifications.workerServices.ipFamilyPolicy`
  - `serviceSpecifications.workerServices.ipFamilies`
  - `serviceSpecifications.workerServices.publicSignalingIPv6`
  - `serviceSpecifications.workerServices.publicSignalingIPv6Specified`
  - `scpPreferEgressTrafficOnIPv6`
2. To configure IPv4 or IPv6 used for constructing callback URI for NF profile notification from NRF, use the following parameter:

```
serviceSpecifications.scpSubscriptionInfo.ip
```

3. To configure NRF profiles with ipEndpoints having either IPv4 or IPv6 or both IPv4 and IPv6, use the following parameter:

```
nrfProfiles.nfServices.ipEndPoints
```

For more information about above mentioned Helm parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

### Observe

The `ocscp_worker_5gsbi_upstream_connect_failure_total` metric is added in the [Metrics](#) section.

### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.11.2 Network Policies

Network Policies are an application-centric construct that allows you to specify how a pod communicates with various network entities. It creates pod-level rules to control communication between the cluster's pods and services, and to determine which pods and services can access one another inside a cluster.

Previously, the pods under deployment can be contacted by any other pods in the Kubernetes cluster without any restrictions. Now, Network Policy provides namespace-level isolation, which allows secured communications to and from SCP with rules defined in respective Network Policies. The network policies enforce access restrictions for all the applicable data flows except communication from Kubernetes node to pod for invoking container probe. For example, SCP internal microservices cannot be contacted directly by any other pods; The scp-workers in the data plane have special privileges to communicate with other NFs. Pods in the control plane can communicate with other pods only within their namespace.

### Managing Support for Network Policies

#### Enable

To use this feature, network policies need to be applied to the namespace wherein SCP is applied.

#### Configure

You can configure this feature using Helm. For information about Configuring Network Policies for SCP Deployment, see *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

#### Observe

There are no specific metrics and alerts required for the Network Policy feature.

## 3.11.3 Pod Disruption Budget

PodDisruptionBudget (PDB) is a Kubernetes resource that helps to achieve the high availability of scalable application services in voluntary disruptions performed by cluster administrators to manage the cluster nodes. It is defined for highly available and scalable SCP services such as scp-worker, scp-cache, and scp-nrfproxy microservices. PDB restricts the number of pods of a highly available application that are down simultaneously from voluntary disruptions, and allows safe eviction of pods when a node is drained of pods to perform maintenance. The `maxPdbUnavailable` parameter is specified in the Helm chart to determine the maximum number of pods that can remain unavailable during a voluntary disruption.

### Managing Pod Disruption Budget

#### Enable

This feature is enabled automatically if you're deploying SCP with release 16.

#### Configure

You can configure this feature using Helm. For information about configuring PDB, see *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

#### Observe

There is no specific metrics and alerts required for the Support of PDB functionality.

## 3.11.4 SCP Microservices and Probes

SCP microservices uses Kubernetes probes to monitor and manage the SCP application's initialization, health, and status. These are HTTP probes that provide a mechanism to identify the health status of the application. This probing occurs on a regular basis at a fixed interval, and appropriate action is taken if the probes fail.

The Kubernetes probes are as follows:

- **Liveness probes:** These probes allow you to evaluate whether an application that is running in a container is in a healthy state. If not, Kubernetes terminates the container, and the container is subjected to its restart policy.  
If a container doesn't provide a liveness probe, the default state is success.

- **Readiness probes:** These probes continuously verify whether a container is ready to serve requests. If the probe returns a failed state, Kubernetes removes the IP address for the pod from the endpoints of all services.  
The default state of readiness before the initial delay is failure. If a container doesn't provide a readiness probe, the default state is success.  
  
A pod is deemed ready when all of its containers have reached a state of readiness. The use of the signal is to regulate the selection of pods that serve as backends for services. When a pod is in an unready state, it's removed from the load balancer service. The stable support of the readiness probe has been available since the release of Kubernetes 1.0.
- **Startup probes:** These probes verify whether an application within a container has started. All other probes are disabled if a startup probe is provided until it succeeds, and if a container fails this probe, the container is terminated and follows the restart policy for the pod.  
This can be used to adopt liveness checks on slow-starting containers, avoiding them getting killed by the kubelet before they're up and running. The stable support of the startup probe has been available since the release of Kubernetes 1.0.

The following table describes the probes used by SCP microservices and their details.

Table 3-15 SCP Microservices and Startup Probes

| SCP Microservice | Startup Probe Support | Startup Probe Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Startup Probe Configuration                                                                                                    | Action on Failure |
|------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------|
| SCP-Worker       | Yes                   | <p>If all of the conditions listed below are met, the starting probe succeeds; otherwise, the probe fails:</p> <ul style="list-style-type: none"> <li>Routing rules received from the Notification microservice.</li> <li>Routing options received from Configurations</li> <li>The following data objects are received from the Configuration microservice: <ul style="list-style-type: none"> <li>WORKER_POD_OVERLOAD_ACTION_POLICY</li> <li>WORKER_POD_OVERLOAD_CTRL_POLICY</li> <li>WORKER_POD_OVERLOAD_DISCARD_POLICY</li> <li>SERVICE_SPECIFICATIONS</li> <li>SCP_NF_PROFILES</li> <li>SCP_FEATURES</li> <li>LOCAL_NF_AUTH2_REQUIRED</li> <li>ACCESS_TO_KEN_GRANULARITY_CONFIG</li> </ul> </li> <li>The scp-worker is able to access the scp-cache if rate limiting is enabled.</li> </ul> | <ul style="list-style-type: none"> <li>Initial delay: 35s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul> | Pod Restart       |

**Note**

Startup probes are only implemented for SCP\_worker as of the current release.

Table 3-16 SCP Microservices and Readiness Probes

| SCP Microservice | Readiness Probe Support | Readiness Probe Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Readiness Probe Configuration                                                                                                                                                                            | Action on Failure                                                                                                                                                             |
|------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCP-Worker       | Yes                     | <p>The scp-worker service is marked as ready if all the below conditions are met; otherwise, it is marked as not ready:</p> <ul style="list-style-type: none"> <li>Routing rules received from the Notification microservice.</li> <li>Routing options received from Configurations</li> <li>The following data objects are received from the Configuration microservice: <ul style="list-style-type: none"> <li>WORKER_POD_OVERLOAD_ACTION_POLICY</li> <li>WORKER_POD_OVERLOAD_CTRL_POLICY</li> <li>WORKER_POD_OVERLOAD_DISCARD_POLICY</li> <li>SERVICE_SPECIFICATIONS</li> <li>SCP_NF_PROFILES</li> <li>SCP_FEATURES</li> <li>LOCAL_NF_OAUTH2_REQUIRED</li> <li>ACCESS_TO_KEN_GRANULARITY_CONFIG</li> </ul> </li> <li>The scp-worker is able to access the scp-cache if rate limiting is enabled.</li> </ul> | <ul style="list-style-type: none"> <li>The readiness probe starts after the startup probe is successful.</li> <li>Initial delay: 1s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul> | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |

Table 3-16 (Cont.) SCP Microservices and Readiness Probes

| SCP Microservice   | Readiness Probe Support | Readiness Probe Condition                                                                                                                                                                                                                                                                                                                                                       | Readiness Probe Configuration                                                                                                   | Action on Failure                                                                                                                                                             |
|--------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCP-nrfproxy       | Yes                     | <p>The SCP-nrfproxy service is marked as ready if all the below conditions are met; otherwise, it is marked as not ready.</p> <ul style="list-style-type: none"> <li>Check if the NRF configuration is available and can be read from the NRF Profiles table in the cnDBtier service.</li> <li>Check if the list of prioritized NRFs is available as per preference.</li> </ul> | <ul style="list-style-type: none"> <li>Initial delay: 30s</li> <li>Probe interval: 10s</li> <li>Failure threshold: 5</li> </ul> | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |
| SCP-loadManager    | Yes                     | The readiness probe for the SCP-loadManager service returns false during application initialization, and after the application is initialized, it starts returning the true value.                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Initial delay: 5s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul>   | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |
| SCP-nrfProxy-Oauth | Yes                     | The readiness probe for the scp-nrfproxy-oauth service returns false during application initialization, and after the application is initialized, it starts returning the true value.                                                                                                                                                                                           | <ul style="list-style-type: none"> <li>Initial delay: 5s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul>   | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |
| SCP-Cache          | Yes                     | <p>The scp-cache service is marked as ready if the below conditions are met; otherwise, it is marked as not ready.</p> <ul style="list-style-type: none"> <li>Check if application maps in scp-cache service are initialized.</li> </ul>                                                                                                                                        | <ul style="list-style-type: none"> <li>Initial delay: 5s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul>   | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |

Table 3-16 (Cont.) SCP Microservices and Readiness Probes

| SCP Microservice   | Readiness Probe Support | Readiness Probe Condition                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Readiness Probe Configuration                                                                                                   | Action on Failure                                                                                                                                                             |
|--------------------|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCPC-Notification  | Yes                     | <p>The scpc-notification service is marked as ready if the below conditions are met; otherwise, it is marked as not ready.</p> <ul style="list-style-type: none"> <li>Check whether the following tables have been created and populated: <ul style="list-style-type: none"> <li>SCP_NF_PROFILES</li> <li>NRF_NF_DETAILS</li> <li>CANARY_RELEASES</li> <li>ROUTING_OPTIONS</li> <li>SYSTEM_OPTIONS</li> <li>VIRTUAL_SERVICES</li> <li>SERVICE_ENTRIES</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>Initial delay: 30s</li> <li>Probe interval: 10s</li> <li>Failure threshold: 5</li> </ul> | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |
| SCPC-Audit         | Yes                     | <p>The scp-audit service is marked as ready if the below condition is met; otherwise, it is marked as not ready.</p> <ul style="list-style-type: none"> <li>Check if the NRF configuration is available and can be read from the NRF Profiles table in the cnDBtier service.</li> </ul>                                                                                                                                                                                      | <ul style="list-style-type: none"> <li>Initial delay: 30s</li> <li>Probe interval: 10s</li> <li>Failure threshold: 5</li> </ul> | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |
| SCPC-Configuration | Yes                     | <p>The scpc-configuration service is marked as ready if the below conditions are met; otherwise, it is marked as not ready.</p> <ul style="list-style-type: none"> <li>Check if the cnDBtier service is accessible and the required DB tables are available or created.</li> </ul>                                                                                                                                                                                           | <ul style="list-style-type: none"> <li>Initial delay: 30s</li> <li>Probe interval: 10s</li> <li>Failure threshold: 5</li> </ul> | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |



Table 3-16 (Cont.) SCP Microservices and Readiness Probes

| SCP Microservice          | Readiness Probe Support | Readiness Probe Condition                                                                                                                                                                                                                                                                                                                                                                                                             | Readiness Probe Configuration                                                                                                   | Action on Failure                                                                                                                                                             |
|---------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCPC-Subscription         | Yes                     | <p>The scpc-subscription service is marked as ready if all the below conditions are met; otherwise, it is marked as not ready.</p> <ul style="list-style-type: none"> <li>Check if the cnDBteir service is accessible and if NRF and SCP profiles are available or created in the cnDBteir service.</li> </ul>                                                                                                                        | <ul style="list-style-type: none"> <li>Initial delay: 30s</li> <li>Probe interval: 10s</li> <li>Failure threshold: 5</li> </ul> | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |
| SCPC-Alternate-resolution | Yes                     | <p>The scpc-alternate resolution service is marked as ready if all the below conditions are met; otherwise, it is marked as not ready.</p> <ul style="list-style-type: none"> <li>Check if the cnDBtier service is accessible and if DNS SRV configuration for alternate route groups is available or created in the cnDBtier service.</li> <li>Validate if system options are synced from the scpc-configuration service.</li> </ul> | <ul style="list-style-type: none"> <li>Initial delay: 30s</li> <li>Probe interval: 10s</li> <li>Failure threshold: 5</li> </ul> | Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, <a href="#">Readiness probes</a> |

Table 3-17 SCP Microservices and Liveness Probes

| SCP Microservice | Liveness Probe Support | Liveness Probe Condition                                                                                                                                                                                                                                                                          | Liveness Probe Configuration                                                                                                                                                                            | Liveness Action on Failure |
|------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| SCP-Worker       | Yes                    | <ul style="list-style-type: none"> <li>Threadwatchdog controls the Liveness probe.</li> <li>ThreadWatchDog monitors all the threads running in the pod at a fixed interval.</li> <li>If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.</li> </ul> | <ul style="list-style-type: none"> <li>The liveness probe starts after the startup probe is successful.</li> <li>Initial delay: 1s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul> | Pod restart                |

Table 3-17 (Cont.) SCP Microservices and Liveness Probes

| SCP Microservice   | Liveness Probe Support | Liveness Probe Condition                                                                                                                                                                                                                                                                          | Liveness Probe Configuration                                                                                                    | Liveness Action on Failure |
|--------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| SCP-nrfproxy       | Yes                    | <ul style="list-style-type: none"> <li>Threadwatchdog controls the Liveness probe.</li> <li>ThreadWatchDog monitors all the threads running in the pod at a fixed interval.</li> <li>If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.</li> </ul> | <ul style="list-style-type: none"> <li>Initial delay: 180s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul> | Pod restart                |
| SCP-loadManager    | Yes                    | <ul style="list-style-type: none"> <li>Threadwatchdog controls the Liveness probe.</li> <li>ThreadWatchDog monitors all the threads running in the pod at a fixed interval.</li> <li>If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.</li> </ul> | <ul style="list-style-type: none"> <li>Initial delay: 180s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul> | Pod restart                |
| SCP-nrfProxy-Oauth | Yes                    | <ul style="list-style-type: none"> <li>Threadwatchdog controls the Liveness probe.</li> <li>ThreadWatchDog monitors all the threads running in the pod at a fixed interval.</li> <li>If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.</li> </ul> | <ul style="list-style-type: none"> <li>Initial delay: 180s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul> | Pod restart                |
| SCP-Cache          | Yes                    | The liveness probe for scp-cache always returns true.                                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Initial delay: 180s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul> | N/A                        |

Table 3-17 (Cont.) SCP Microservices and Liveness Probes

| SCP Microservice   | Liveness Probe Support | Liveness Probe Condition                                                                                                                                                                                                                                                                          | Liveness Probe Configuration                                                                                                    | Liveness Action on Failure |
|--------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| SCPC-Notification  | Yes                    | <ul style="list-style-type: none"> <li>Threadwatchdog controls the Liveness probe.</li> <li>ThreadWatchDog monitors all the threads running in the pod at a fixed interval.</li> <li>If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.</li> </ul> | <ul style="list-style-type: none"> <li>Initial delay: 180s</li> <li>Probe interval: 2s</li> <li>Failure threshold: 5</li> </ul> | Pod restart                |
| SCPC-Audit         | Yes                    | <ul style="list-style-type: none"> <li>Threadwatchdog controls the Liveness probe.</li> <li>ThreadWatchDog monitors all the threads running in the pod at a fixed interval.</li> <li>If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.</li> </ul> | N/A                                                                                                                             | Pod restart                |
| SCPC-Configuration | Yes                    | <ul style="list-style-type: none"> <li>Threadwatchdog controls the Liveness probe.</li> <li>ThreadWatchDog monitors all the threads running in the pod at a fixed interval.</li> <li>If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.</li> </ul> | N/A                                                                                                                             | Pod restart                |

Table 3-17 (Cont.) SCP Microservices and Liveness Probes

| SCP Microservice          | Liveness Probe Support | Liveness Probe Condition                                                                                                                                                                                                                                                                          | Liveness Probe Configuration | Liveness Action on Failure |
|---------------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|----------------------------|
| SCPC-Subscription         | Yes                    | <ul style="list-style-type: none"> <li>Threadwatchdog controls the Liveness probe.</li> <li>ThreadWatchDog monitors all the threads running in the pod at a fixed interval.</li> <li>If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.</li> </ul> | N/A                          | Pod restart                |
| SCPC-Alternate-resolution | Yes                    | <ul style="list-style-type: none"> <li>Threadwatchdog controls the Liveness probe.</li> <li>ThreadWatchDog monitors all the threads running in the pod at a fixed interval.</li> <li>If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.</li> </ul> | N/A                          | Pod restart                |

### 3.11.5 Horizontal Pod Autoscaler

You can use the Kubernetes Horizontal Pod Autoscaler to automatically scale the number of pods in a deployment, replication controller, replica set, or stateful set, based on that resource's CPU or memory utilization or on other metrics. Using Horizontal Pod Autoscaler, applications can be scaled out to meet increased demands or scaled in when resources are no longer required. You can set a target metric percentage for Horizontal Pod Autoscaler to meet when scaling applications. For more information about Horizontal Pod Autoscaler, see <https://kubernetes.io/docs/tasks/run-application/horizontal-pod-autoscale/>.

A new service pod accepts new HTTP2 connection requests when the pod status is "Ready". Otherwise, the new HTTP2 connection requests are distributed among service pods with the status "Ready". After an HTTP2 connection is established, the 5G SBI messages are routed on the same established HTTP2 connection with a particular service pod. So, when a service pod is restarted or a new pod is spawned due to an upgrade or scaling, the newly created service pod starts accepting new HTTP2 connection requests from the consumer NFs, and the existing HTTP2 connections will continue to manage traffic. If any existing connection is terminated due to idle timeout or any other reason, and when the consumer NF initiates a new connection attempt, this connection can be established with any existing or new service pod with the status "Ready". To avoid scaling in and scaling out of the SCP service pods, it is recommended to have minimum and maximum replica count for the rated capacity of the SCP deployment. For more information about replica count, see "Resource Requirements" in *Oracle*

*Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide.*

### Managing Horizontal Pod Autoscaler

#### Enable

This feature is automatically enabled in SCP at the time of deployment.

#### Configure

There are no specific configurations required for this feature.

#### Observe

There are no specific metrics and alerts required for this feature.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.12 SCP Response Timeout Extension

Previously, users could configure a response timeout interval of up to 15 seconds for receiving a response from SCP.

The SCP Response Timeout Extension feature enhances the SCP's capability to manage network requests more effectively, ensuring consistent service even when Producer NFs require additional processing time.

The enhanced feature allows users to extend the maximum response timeout to 50 seconds. This improvement provides configuration options to handle response timeouts for NFs that require more time to serve a request.


The SCP allows users to configure a maximum timeout of up to 50 seconds for receiving responses from the Producer NF. If the response is not received within this timeframe, the SCP will automatically initiate rerouting to an available alternate NF or pod.

The SCP monitors the total forwarded request rate, specifically targeting requests with response times exceeding 50 seconds. A single SCP deployment supports up to 200 messages per second (MPS) for all NF Service-Based Interface (SBI) traffic through multiple interfaces. An alert is raised when the traffic exceeds 200 MPS and the response delay from the Producer NF takes more than 50 seconds.

#### Call Flow

The following call flow diagram illustrates the scenario:

Figure 3-2 Call Flow for SCP Response Timeout Extension

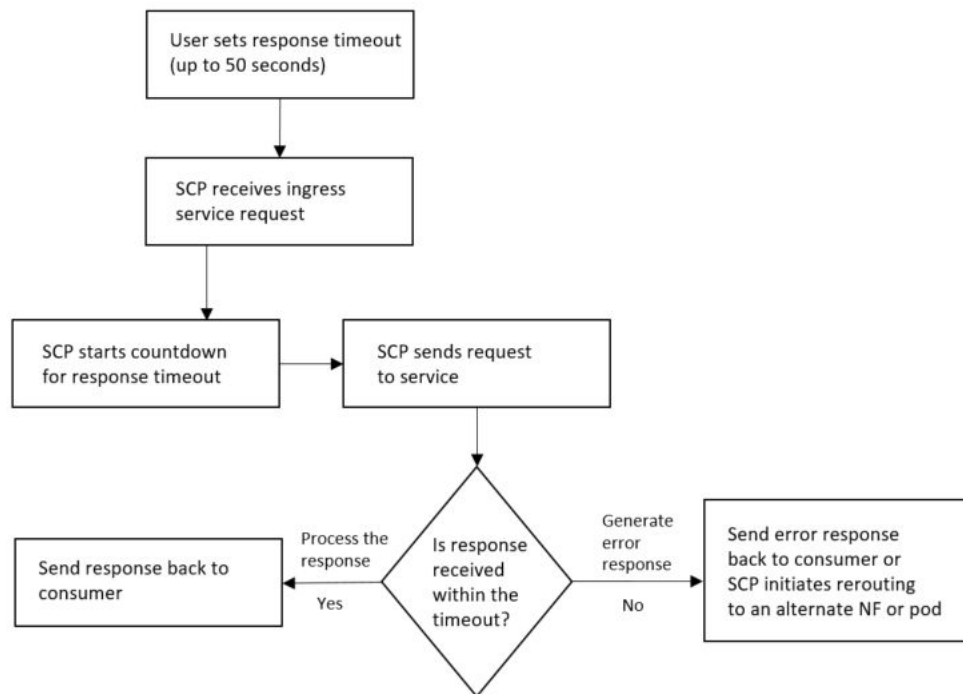

1. The user sets the response timeout with a maximum limit of up to 50 seconds for a service.
2. SCP receives the ingress service request for the same service and starts the countdown for the response timeout before sending the request out.
3. SCP checks if the response is received within the timeout period:
  - a. If the response is received within the timeout, SCP will process the response and send it back to the Consumer NF.
  - b. If not, SCP will generate its own error response and send it back to the Consumer NF.
4. If SCP receives more than 200 responses with a response time of 50 seconds or greater from the Producer NF, SCP will generate an alert.

### Managing SCP Response Timeout in Routing Option Configuration

#### Enable

This feature is enabled automatically at the time of SCP deployment.

#### Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Routing Options](#).
- **Configure using REST APIs:** For more information about configuring REST APIs, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

- The `ocscp_metric_upstream_service_time_total` metric is updated with new buckets for response timeout in the [Metrics](#) section.
- Added [SCPHighResponseTimeFromProducer](#) alert in the [Alerts](#) section.

### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.13 Overload Control Based on the Overload Control Information Header

SCP, SEPP, producer NFs, and consumer NFs get overloaded when they operate beyond their signaling capacity. An enhancement is required to include Overload Control Information (OCI) in 5G Service Based Interface (SBI) messages to convey the overload capacity of NFs to their peers.

Using the Overload Control Based on the Overload Control Information Header feature, SCP, SEPP, consumer NFs, and producer NFs can gracefully reduce their incoming signaling traffic by conveying consumer NFs to reduce sending service requests or by conveying producer NFs to reduce sending notification requests, respectively, so that these entities or peer NFs can process the traffic according to their configured capacities. After receiving the 3gpp-Sbi-Oci header from consumer NFs, producer NFs perform the signaling reduction toward the consumer NF only for the notifications or callback requests according to the overload scope and not for any NF services that may be produced by the same NF.

Depending on SCP's configuration, SCP can:

- send its load information in the OCI header with reduction metrics based on the REST API configuration.
- reduce traffic toward the peer based on the OCI received from a peer.

OCI is conveyed within the 3gpp-Sbi-Oci header. When SCP, SEPP, consumer NF, or producer NF experiences overload conditions, it sends overload condition information through the 3gpp-Sbi-Oci header, which is tagged along with the messages to peers.

OCI contains Overload Timestamp, Overload-Reduction-Metric, Period-of-Validity, and Scope attributes in the 3gpp-Sbi-Oci header.

A sample format of the 3gpp-Sbi-Oci header for an NF instance is as follows:

```
Timestamp: "Mon, 04 Dec 2023 08:49:37 GMT"; Period-of-Validity: 75s; Overload-Reduction-Metric: 50%; NF-Instance: 54804518-4191-46b3-955c-ac631f953ed8
```

The following table describes attributes of the 3gpp-Sbi-Oci header format:

**Table 3-18 3gpp-Sbi-Oci Header Attributes**

| Attribute                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Timestamp                 | Indicates the time when the OCI was generated. This attribute is used by the OCI recipient such as peers or SCP, to decide whether the newly received OCI is the same as the previously received OCI or different. The OCI recipient can overwrite any stored OCI for a peer NF, NF set, NF service, NF service set, Callback URI, SCP, or SEPP with the newly received OCI if the new OCI is more recent than the previously stored OCI.<br>Example: Timestamp: "Mon, 04 Dec 2023 08:49:37 GMT".                                                                                                                                                                                                                                                                                                                                                              |
| Period-of-Validity        | Indicates the duration during which the overload condition specified by the 3gpp-Sbi-Oci header is considered valid until overridden by subsequent new OCIs.<br>Example: Period-of-Validity: 75s.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Overload-Reduction-Metric | Indicates the percentage of traffic reduction requested by the OCI sender to the OCI recipient. This value can range from 0 to 100.<br>Example: Overload-Reduction-Metric: 50%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Scope                     | Indicates the message requests or notification requests to which the OCI is applicable. It identifies the traffic that the OCI sender requests the receiver to process in accordance with the OCI.<br>Example: NF-Instance: 54804518-4191-46b3-955c-ac631f953ed8.<br>List of supported olcScope in the OCI header at SCP: <ul style="list-style-type: none"> <li>• nfProducerScope <ul style="list-style-type: none"> <li>– NF-Instance</li> <li>– NF-Service-Instance</li> </ul> </li> <li>• nfConsumerScope <ul style="list-style-type: none"> <li>– Callback-Uri</li> <li>– NF-Instance</li> <li>– NF-Service-Instance</li> <li>– NF-Instance and Service-Name</li> </ul> </li> <li>• scpScope <ul style="list-style-type: none"> <li>– SCP-FQDN</li> </ul> </li> <li>• seppScope <ul style="list-style-type: none"> <li>– SEPP-FQDN</li> </ul> </li> </ul> |

### Conveyance of OCI

The following scenarios explain the conveyance of OCI:

#### Peer OCI Enforcement

SCP performs OCI enforcement based on the OCI header received from the peer and the REST API configuration.

When a peer NF is overloaded, it sends OCI to SCP so that SCP can throttle the traffic destined for that peer NF. Based on the `ociEnforcementAction` REST API parameter configuration, SCP can perform alternate routing to another equivalent peer NF or directly send an error response to the peer consumer NF. SCP relays the OCI received from the peer NF to other peer NFs based on the `relayPeerOci` REST API parameter configuration as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. For example, if the Overload-Reduction-Metric attribute of the OCI header is 10%, the producer NF conveys SCP to reduce the message rate by 10%. If SCP has 100 messages to be routed to that producer NF, SCP will route 90 messages to the target producer NF. To process the pending 10 messages, SCP can reroute the messages to another equivalent NF or send an error response to the consumer NF based on the `ociEnforcementAction` REST API parameter.



After the expiry of peer OCI Period-of-Validity attribute, SCP can continue sending traffic toward the peer immediately or incrementally based on the `ociTrafficRecoveryPolicy` REST API parameter.

### Self-OCI Generation and Conveyance

SCP conveys its overload control information, which is known as self-OCI, with its peer NFs when SCP is overloaded.

The overload condition of SCP is determined by the CPU utilization of all SCP-Worker pods. SCP is overloaded when the average CPU utilization of all the pods exceeds the configured OCI threshold levels.

When SCP is overloaded, SCP generates OCI based on the threshold levels such as WARN, MINOR, MAJOR, and CRITICAL, configured using the `ociThresholdConfig` REST API parameter as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. SCP sends the self-generated OCI only when there is any message to be routed to the peer NF.

SCP starts conveying OCI to peers when it gets overloaded based on the configured threshold level. OCI is conveyed for the following scenarios:

- When OCI threshold changes: Whenever SCP's traffic load changes resulting in OCI threshold changes, SCP creates a new OCI based on the current threshold level configuration values and current timestamp.
- When the Period-of-Validity attribute expires: When the Period-of-Validity attribute of the last sent OCI expires, SCP creates a new OCI based on the current threshold level configuration values and current timestamp.
- Periodically: After every `scpOciConveyanceInterval` interval, SCP sends the same OCI that was sent last time to the peer NF.

### Managing Overload Control Information

#### Enable

By default, this feature is disabled. You can use the `oci` option to enable or disable this feature as described in [Configuring SCP Features](#).

#### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see
  - [Configuring OCI](#)
  - [Configuring OCI Threshold Levels](#)
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features", "Configuring Overload Configuration Information Threshold" and "Configuring Overload Configuration Information" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_peer_oci_conveyance_total`
- `ocscp_worker_oci_conveyance_total`
- `ocscp_worker_oci_enforced_total`

- `ocscp_worker_rx_unsupported_oci_scope_total`
- `ocscp_metric_nf_oci_rx_total`

The following metrics are added in the [Alerts](#) section:

- [ScpSelfOCIThresholdAboveWarn](#)
- [ScpSelfOCIThresholdAboveMinor](#)
- [ScpSelfOCIThresholdAboveMajor](#)
- [ScpSelfOCIThresholdAboveCritical](#)

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.14 Support for HTTPS

Hypertext Transfer Protocol Secure (HTTPS) is an extension of Hypertext Transfer Protocol (HTTP). HTTPS establishes a secure connection between Network Functions (NFs) in a 5G network and uses Transport Layer Security (TLS) to encrypt the communication protocols.

With the support of HTTPS connections, SCP accepts secured ingress connection requests from a consumer NF and establishes a secured egress connection with a producer NF. HTTPS provides confidentiality and integrity protection to 5G Service Based Interface (SBI) messages.

SCP processes 5G SBI messages over HTTPS connection based on the `sbiProxySslConfigurations` parameter configuration as specified in the `custom-values.yaml` file. For more information, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*. The `sbiProxySslConfigurations` configuration authorizes both ingress and egress connections from consumer NFs and producer NFs, respectively with SCP.

SCP supports a single and multiple TLS certificates to enable HTTPS as described in [TLS Certificate Configuration Enhancement](#). SCP supports two-way TLS authentication for HTTPS connections and accesses Certificate Authority (CA) from Kubernetes secret.

### Note

- This feature supports HTTPS for inter-NF communication but not intra-NF communication, that is, communication between two microservices within SCP.
- SCP supports both HTTP and HTTPS concurrently. You can select to expose service IP for HTTP, HTTPS, or both.
- This feature supports TLSv1.2 and TLSv1.3.

### Managing Support for HTTPS

#### Enable

This feature is enabled by setting the following Helm parameters in the `custom-values.yaml` file:

- Enabling HTTPS for ingress connections:
  - For Release 16 deployment: The `scpProfileInfo.scpInfo.scpPorts.https` parameter enables SCP to establish ingress connection with consumer NFs. You must set the `https` port to the same value as the `publicSignallingPortHttps` parameter. Example of NF Service for HTTPS:

```
# - serviceInstanceId: f86b54b7-aef9-4c78-b346-3bfb7f380813
#   serviceName: nscp-5g-sbi-proxy
#   fqdn: <scprel>-scp-worker.scpsvc.svc.cluster.local
#   scheme: https
#   priority: 0 # Default value is 0
#   capacity: 100 # Default value is 100
#   load: 0
#   nfServiceStatus: REGISTERED
#   ipEndpoints:
#     - ipv4Address: 10.104.121.240 # this IP should be same as
#       "publicSignalingIPHttps" of SCP mentioned above.
#       port: '9443' # this port should be same as
#       "publicSignalingPortHttps" of SCP mentioned above.
#   apiPrefix: # Ignored in SCP processing
#   versions: # Ignored in SCP processing, but kept for
#             registering with NRF
#   - apiFullVersion: 1.0.0
#     apiVersionInUri: v1
```

- Enabling HTTPS for egress connections: The `nativeEgressHttpsSupport` parameter must be set to `true` to enable SCP to establish a connection with producer NFs over HTTPS. By default, this value is set to `false`. If this value is set to `false`, then all the connections with producer NFs are established through HTTP.

For more information about above mentioned parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

#### ① Note

- You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 25.2.100 to 25.2.100.
- TLS certificates for both egress and ingress are mandatory when enabling HTTPS.

## Configure

`sbiProxySslConfigurations` and `ddSslConfiguration` Helm parameters are introduced as part of this feature. To use this feature, complete the configuration as described in "Global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

## Observe

The `ocscp_metric_ssl_certificate_expire_total` metric is updated in the [Metrics](#) section.

## Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

### 3.14.1 TLS Certificate Configuration Enhancement

SCP uses Hypertext Transfer Protocol Secure (HTTPS) to establish secured ingress and egress connections with consumer NFs and producer NFs, respectively. These communication protocols are encrypted using Transport Layer Security (TLS).

In SCP 23.2.0, SCP used to support a single TLS certificate configuration to enable HTTPS.

From 23.3.0, this enhancement enables SCP to configure different Transport Layer Security (TLS) certificates on ingress and egress interfaces. It also allows users to provide primary and secondary certificates for each interface.

Multiple TLS certificates can be configured across the following communication interfaces:

- Egress connections on 5G Service Based Architecture (SBA): SCP acts as a client while sending message requests to producer NFs, producer SCP-P, or NRF. For example:
  - A consumer 'SCP-C' sends health check request to a producer 'SCP-P'.
  - SCP forwards notifications to consumer NFs.
  - SCP forwards Service, Discovery, or Access Token requests to NRF or producer NFs.
- Ingress connections on 5G SBA: SCP acts as a server to process message requests received from consumer NFs, SCP-C, or NRF. For example:
  - SCP-P receives health check request from SCP-C.
  - SCP receives notifications from NRF or NF producer.
  - SCP receives service or health check requests from consumer NFs.
- Oracle Communications Network Analytics Data Director (OCNADD) connection on message feed: SCP acts as a client toward OCNADD on message feed interfaces, for example, SCP sends message feed data to OCNADD.

#### Note

You can use a single or multiple TLS certificates to enable HTTPS.

If the primary TLS certificate expires or is about to expire, SCP switches to an alternate or secondary TLS certificate. If there is no alternate TLS certificate configured, SCP uses a single certificate to enable HTTPS. At each communication interface such as ingress, egress, and OCNADD, you can configure the `caBundle` Helm parameter to manage the Certificate Authority (CA) bundle. The CA can be the same or different at these interfaces. For example, CA signing the TLS certificate at the ingress communication interface can be the same or different from the CA at the egress communication interface.

**Note**

It is recommended to maintain multiple TLS certificates with overlapping expiry time to avoid service interruption during certificate expiry. For example, if the primary certificate validity is changed from T0 and T1, then the validity of the secondary certificate must be changed from T0 to T2 so that when the primary certificate expires, the secondary certificate gets activated within the expiry period of the primary certificate, where,  $T0 < T1 < T2$ .

By default, SCP uses a single TLS certificate to enable HTTPS. To enable support for multiple TLS certificates, you can modify the `sbiProxySslConfigurations` Helm parameter configurations for ingress and egress connections and the `ddSslConfiguration` Helm parameter for OCNADD connections.

SCP uses the Helm parameters `sslCertExpiryMinorThreshold`, `sslCertExpiryMajorThreshold`, and `sslCertExpiryCriticalThreshold` to set up minor, major, and critical alerts for TLS certificate expiration. These alerts are triggered at the specified times to signal the impending expiry of the certificates.

SCP provides the `terminateTLSConnsOnCertExpiry` Helm configuration at the egress communication interface to determine whether to terminate or maintain the existing HTTPS connections when the configured TLS certificate is updated or renewed. When the TLS certificate expires, then SCP:

- maintains the existing HTTPS connections that were using the expired certificates.
- creates new HTTPS connections which uses the updated or renewed TLS certificate.

For more information about configuring Helm parameters for multiple TLS certificates, see "Global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

## 3.14.2 Support for TLS

SCP uses Hypertext Transfer Protocol Secure (HTTPS) to establish secure connections with consumer NFs and producer NFs, respectively. These communication protocols are encrypted using Transport Layer Security (TLS).

TLS comprises the following components:


- **Handshake Protocol:** Exchanges the security parameters of a connection. Handshake messages are supplied to the TLS record layer.
- **Record Protocol:** Receives the messages to be transmitted, fragments the data into multiple blocks, secures the records, and then transmits the result. Received data is delivered to consumer NFs and producer NFs.

This feature enables the support for TLS 1.3 to all consumer NFs, producer NFs, the Data Director, SBI Interfaces, and any interfaces previously supporting TLS 1.2. Support for TLS 1.2 will remain available.

### TLS 1.2 and TLS 1.3 Handshake

This section describes the differences between TLS 1.3 and TLS 1.2, as well as the advantages of TLS 1.3 over TLS 1.2 and earlier versions.

Figure 3-3 TLS 1.2 and TLS 1.3 Handshake

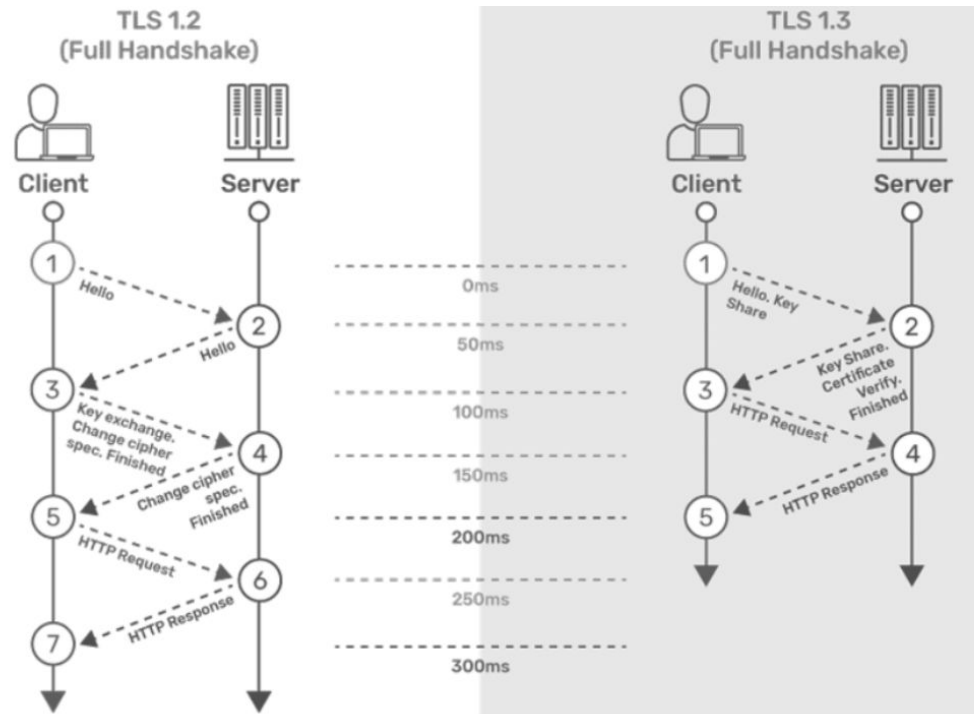**TLS 1.2**

**Step 1:** The connection or handshake starts when the client sends a "client hello" message to the server. This message consists of cryptographic information such as supported protocols and cipher suites. It also contains a random value or random byte string.

**Step 2:** To respond to the "client hello" message, the server sends a 'server hello' message. This message contains the CipherSuite that the server has selected from the options provided by the client. The server also sends its certificate, along with the session ID and another random value.

**Step 3:** The client verifies the certificate sent by the server. When the verification is complete, it sends a byte string encrypted using the public key of the server's certificate.

**Step 4:** When the server receives the secret, both the client and server generate a master key along with session keys (ephemeral keys). These session keys are used for symmetrically encrypting the data.

**Step 5:** The client sends an "HTTP Request" message to the server to enable the server to transition to symmetric encryption using the session keys.

**Step 6:** To respond to the client's "HTTP Request" message, the server does the same and switches its security state to symmetric encryption. The server concludes the handshake by sending an HTTP response.

**Step 7:** The client-server handshake is completed in two round trips.

**TLS 1.3**

**Step 1:** The connection or handshake begins when the client sends a "client hello" message to the server, which includes the list of supported cipher suites and the client's key share for the specific key agreement protocol.

**Step 2:** To respond to the "client hello" message, the server sends the key agreement protocol that it has chosen. The "Server Hello" message includes the server key share, server certificate, and the "Server Finished" message.

**Step 3:** The client verifies the server certificate, generates keys since it has the server's key share, and then sends the "Client Finished" message along with an HTTP request.

**Step 4:** The server completes the handshake by sending an HTTP response.

### Comparison Between TLS 1.3 and TLS 1.2

The following table provides the comparison of TLS 1.3 and TLS 1.2:

**Table 3-19 Comparison of TLS 1.3 and TLS 1.2**

| Feature                              | TLS 1.3                                                                                                                                                                                                                                                                                                                                                                                                                    | TLS 1.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>TLS Handshake</b>                 | <ul style="list-style-type: none"> <li>The initial handshake involves the exchange of key shares, ensuring cryptographic security.</li> <li>A typical handshake in TLS 1.3 involves the exchange of up to 3 packets, thereby facilitating quicker and more responsive connections.</li> </ul>                                                                                                                              | <ul style="list-style-type: none"> <li>The initial handshake occurs in clear text.</li> <li>A typical handshake in TLS 1.2 involves a more extended process, typically requiring 5-7 packets for completion, resulting in slower connection establishment times.</li> </ul>                                                                                                                                                                                                                                           |
| <b>Cipher Suites and Privacy</b>     | <ul style="list-style-type: none"> <li>Improving security by narrowing the selection of cipher suites, which streamlines configuration and reduces errors. Supported algorithms are free from known vulnerabilities, thus making the cipher suites more secure. <ul style="list-style-type: none"> <li>TLS_AES_128_GCM_SHA256</li> <li>TLS_AES_256_GCM_SHA384</li> <li>TLS_CHACHA20_POLY1305_SHA256</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>Supporting a wide range of cipher suites that are vulnerable to attacks results in less secure cipher suites. <ul style="list-style-type: none"> <li>TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384</li> <li>TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384</li> <li>TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256</li> <li>TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256</li> <li>TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256</li> <li>TLS_ECDHE_ECDSA_WITH_CHACHA20_POLY1305_SHA256</li> </ul> </li> </ul> |
| <b>Round-Trip Time</b>               | Efficient session resumption modes, such as Zero Round Trip Time (0-RTT), enable clients to resume sessions without additional round trips. Data can be transmitted in the initial message using Pre-Shared Keys (PSK), further enhancing the efficiency of the communication process.                                                                                                                                     | TLS 1.2 does not support a 0-RTT mode for resuming sessions with reduced round-trip time.                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Perfect Forward Secrecy (PFS)</b> | TLS 1.3 supports Provide Forward Secrecy (PFS). PFS ensures that each session key is entirely independent of long-term private keys, which are used over an extended period for decrypting encrypted data.                                                                                                                                                                                                                 | TLS 1.2 does not provide PFS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Performance</b>                   | The handshake process is optimized to reduce latency by minimizing the number of required round trips, resulting in a more responsive connection.                                                                                                                                                                                                                                                                          | The handshake process involves multiple round trips between the client and server, may result in increased latency and a less responsive connection.                                                                                                                                                                                                                                                                                                                                                                  |

TLS 1.3 handshake offers the following improvements over earlier versions:



- The symmetric encryption algorithms are removed and Authenticated Encryption with Associated Data (AEAD) algorithms are supported.
- In TLS 1.3, all handshake messages after the ServerHello are encrypted.
- A zero round-trip time (0-RTT) mode is added in the handshake process, enabling fewer round trips compared to TLS 1.2. Additionally, it utilizes cryptographic algorithms that are faster.
- Static Rivest-Shamir-Adleman (RSA) and Diffie-Hellman cipher suites are removed, ensuring that all public-key-based key exchange mechanisms now Provide Forward Secrecy (PFS).
- TLS 1.3 has better security than TLS 1.2, addressing known vulnerabilities in the handshake process.
- TLS 1.3 eliminates data compression.
- Version Downgrade Protection in TLS 1.3 is a security mechanism that prevents attackers from using an older, potentially less secure version of the TLS protocol. This protection is achieved through the exchange of a "Finished" message between the client and server, which includes a Message Authentication Code (MAC) covering all preceding handshake messages. This mutual verification process ensures that negotiated parameters remain unaltered by potential attackers. This helps ensure that connections are established using the latest, most secure version of TLS available, reducing the risk of vulnerabilities associated with older protocol versions.

## Managing Support for TLS

### Enable

If you want to use TLS 1.3, perform the following procedure:

1. In the `custom_values.yaml` file, configure the following Helm parameters:
  - `sbiProxySslConfigurations.server` to `TLSV1_3`
  - `sbiProxySslConfigurations.client[0]` to `TLSV1_3`

#### Note

By default, the helm parameter is set to TLS 1.3,TLS 1.2.

2. Add the following ciphers to the `cipherSuitesTlsV1_3` parameter:
  - `TLS_AES_128_GCM_SHA256`
  - `TLS_AES_256_GCM_SHA384`
  - `TLS_CHACHA20_POLY1305_SHA256`

### Using TLS for OCNADD

By default, SCP uses a single TLS certificate to enable HTTPS. To enable support for multiple TLS certificates, you can modify the `sbiProxySslConfigurations` Helm parameter configurations for ingress and egress connections and the `ddSslConfiguration` Helm parameter for OCNADD connections.

### Using TLS 1.2

If you want to use only TLS 1.2, perform the following procedure:

1. In the `custom_values.yaml` file, configure the following Helm parameter:



- `sslEnabledProtocol` to TLSv1.2

**Note**

By default, the `helm` parameter is set to TLS 1.3

2. Add the following ciphers to the `cipherSuitesTlsV1_2` parameter:
  - TLS\_ECDHE\_ECDSA\_WITH\_AES\_256\_GCM\_SHA384
  - TLS\_ECDHE\_RSA\_WITH\_AES\_256\_GCM\_SHA384
  - TLS\_ECDHE\_RSA\_WITH\_CHACHA20\_POLY1305\_SHA256
  - TLS\_ECDHE\_ECDSA\_WITH\_AES\_128\_GCM\_SHA256
  - TLS\_ECDHE\_RSA\_WITH\_AES\_128\_GCM\_SHA256
  - TLS\_ECDHE\_ECDSA\_WITH\_CHACHA20\_POLY1305\_SHA256

**Configure**

You can configure this feature using Helm. For information about Helm configurations, see "Global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

**Observe**

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_https_ingress_connection_success_total`
- `ocscp_worker_https_ingress_connection_failure_total`
- `ocscp_worker_https_egress_connection_success_total`
- `ocscp_worker_https_egress_connection_failure_total`
- `ocscp_metric_ssl_certificate_expire_total`

The following alerts are added in the [Alerts](#) section:

- [SCPWorkerSSLCertificateOnCriticalExpiry](#)
- [SCPWorkerSSLCertificateOnMajorExpiry](#)
- [SCPWorkerSSLCertificateOnMinorExpiry](#)
- [SCPIngressConnectionEstablishmentFailure](#)
- [SCPEgressConnectionEstablishmentFailure](#)

**Maintain**

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

### 3.14.3 Support for Automated Certificate Lifecycle Management

In SCP 23.3.x and earlier releases, X.509 and Transport Layer Security (TLS) certificates were managed manually. When multiple instances of SCP were deployed in a 5G network, certificate management, such as certificate creation, renewal, removal, and so on, was tedious and error-prone.

Using the Support for Automated Certificate Lifecycle Management feature, you can integrate SCP with OCCM to support automation of certificate lifecycle management. OCCM manages TLS certificates stored in Kubernetes secrets by integrating with Certificate Authority (CA) using the Certificate Management Protocol Version 2 (CMPv2) protocol. OCCM obtains and signs TLS certificates and stores them in Kubernetes secrets of SCP namespace. For more information about OCCM, see *Oracle Communications Cloud Native Core, Certificate Management User Guide*.

Using this feature, you can monitor, create, recreate, and renew TLS certificates based on their validity. For information about creating Kubernetes secrets, see "Configuring SSL or TLS Certificates to Enable HTTPS" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

## 3.15 Support for HTTP2 Header

To improve efficiency across converged networks and optimize 5G core traffic, 3GPP-defined headers at the SCP have been introduced.

### 3.15.1 Support for 3GPP Timestamp Related Headers

The 3GPP TS 29.500 and TS 29.502 specifications define several headers that are used by 5G Core Network Functions (NFs) to manage timeouts, delays, and responses in 5G Core NFs. These headers provide critical information about the timing of requests and the expected responses.

**Prerequisite:** Time synchronization between NFs and the SCP, as well as among SCP services, is required for this feature to function properly.

The following are the three types of headers and their functionality:

- **3gpp-Sbi-Sender-Timestamp:** This header indicates the exact time, with millisecond granularity, at which an HTTP request or response was initiated by the sender. This timestamp is crucial for tracking when the request was sent, enabling the measurement of signaling delays between different NF service instances within the network.  
For example: 3gpp-Sbi-Sender-Timestamp: Sun, 04 Aug 2019 08:49:37.845 GMT
- **3gpp-Sbi-Origination-Timestamp:** This header captures the exact time, with millisecond granularity, when the originating entity (such as initial NF) initiated the HTTP request.  
For example: 3gpp-Sbi-Origination-Timestamp: Sun, 04 Aug 2019 08:49:37.845 GMT
- **3gpp-Sbi-Max-Rsp-Time:** This header specifies the maximum duration, in milliseconds, that the sender is willing to wait for a response after sending the request.  
For example: 3gpp-Sbi-Max-Rsp-Time: 10000

This feature allows SCP to calculate the response timeout and total transaction lifetime by using the 3GPP-defined SBI Timestamp headers included in the SBI request messages.

When the Timestamp Header Support and Dynamic Response Timeout features are enabled, the SCP will consistently add or modify the 3gpp-Sbi-Sender-Timestamp and 3gpp-Sbi-Max-Rsp-Time headers. However, it will not modify the 3gpp-Sbi-Origination-Timestamp, as this

header represents the original sender's timestamp. The SCP updates the 3gpp-Sbi-Sender-Timestamp to the current time before forwarding the request and adjusts the 3gpp-Sbi-Max-Rsp-Time to reflect the remaining time that the SCP will wait for a response.

Upon receiving a request with both the 3gpp-Sbi-Sender-Timestamp and 3gpp-Sbi-Max-Rsp-Time headers, SCP checks whether the request has already timed out.

For the first routing attempt, the ResponseTimeout is determined by taking the minimum value between the ConfiguredResponseTimeout and the RemainingTimeBudget.

- **Configured Timeout:** The maximum timeout value configured for the service request. This refers to the 'responseTimeout' value configured in the Routing Config Set. For more information, see the "Routing Config Set" in the *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **RemainingTimeBudget:** The amount of time left for the request to be processed is based on the maximum allowable response time (3gpp-Sbi-Max-Rsp-Time) minus the time that has already passed and the downstream response transit time.

```
ResponseTimeout = minimum(
    ConfiguredResponseTimeout, RemainingTimeBudget )
```

The calculation of the timeout value for the 3GPP-defined SBI Timestamp headers also considers the network transit time required to send the SBI response back to the downstream NF, SCP or SEPP in roaming scenarios. This network transit time is configurable. If the user does not wish to include downstream transit time in the above calculations, they can set the relevant value to 0. For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### ① Note

In an inter-SCP case (when an SCP routes a request to another SCP), no alternate routing occurs in the consumer SCP, except in the case of a connection failure. Therefore, use Consumer SCP to allocate the full RemainingTimeBudget as the ResponseTimeout to the next-hop SCP, even if a secondary SCP is available.

SCP will allocate the entire remaining time budget for the last routing attempt:

```
ResponseTimeout = RemainingTimeBudget
```

### Timestamp Header Combinations and SCP Behavior

For this feature to function correctly, it is expected to receive the 3gpp-Sbi-Max-Rsp-Time header and the 3gpp-Sbi-Sender-Timestamp and/or 3gpp-Sbi-Origination-Timestamp headers in the request. However, if the expected headers are not received, SCP will forward the routing request and apply the existing routing behavior.

The following table summarizes the various combinations of the 3GPP SBI Timestamp headers and the corresponding behavior of the SCP when forwarding or processing SBI requests:

Table 3-20 Timestamp Header Combinations and SCP Behavior

| 3gpp-Sbi-Max-Rsp-Time | 3gpp-Sbi-Sender-Timestamp | 3gpp-Sbi-Origination-Timestamp | Feature Enabled and Dynamic Response Timeout = True                                                                                                                                                                        | Feature Enabled and Dynamic Response Timeout = False and Update Timestamp Headers = True |
|-----------------------|---------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Yes                   | Yes                       | Yes                            | Applies the feature as outlined above.                                                                                                                                                                                     | Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers                      |
| Yes                   | Yes                       | No                             | Applies the feature as outlined above.                                                                                                                                                                                     | Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers                      |
| Yes                   | No                        | Yes                            | Applies the feature as outlined above.                                                                                                                                                                                     | Adds or Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers              |
| Yes                   | No                        | No                             | Applies the feature with the assumption that the 3gpp-Sbi-Sender-Timestamp reflects the timestamp at which SCP receives the request at the ingress.                                                                        | Adds or Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers              |
| No                    | Yes                       | Yes                            | Applies the existing routing behavior, SCP will use the configured values to set the total transaction timeout and response timeouts, and adds or updates the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers. | Adds or Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers              |
| No                    | Yes                       | No                             | Applies the existing routing behavior, SCP will use the configured values to set the total transaction timeout and response timeouts, and adds or updates the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers. | Adds or Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers              |

Table 3-20 (Cont.) Timestamp Header Combinations and SCP Behavior

| 3gpp-Sbi-Max-Rsp-Time | 3gpp-Sbi-Sender-Timestamp | 3gpp-Sbi-Origination-Timestamp | Feature Enabled and Dynamic Response Timeout = True                                                                                                                                                                        | Feature Enabled and Dynamic Response Timeout = False and Update Timestamp Headers = True                     |
|-----------------------|---------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| No                    | No                        | Yes                            | Applies the existing routing behavior, SCP will use the configured values to set the total transaction timeout and response timeouts, and adds or updates the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers. | Applies existing behavior. SCP does not add the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers. |
| No                    | No                        | No                             | Applies the existing routing behavior, SCP will use the configured values to set the total transaction timeout and response timeouts, and adds or updates the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers. | Applies existing behavior. SCP does not add the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers. |

**Note**

If any of the expected headers is malformed, the SCP will not reject the request and will instead fall back to the existing routing behavior.

**Managing 3GPP Timestamp Related Headers****Enable**

To enable this feature, you must set the Timestamp Header Support option to true as described in [Configuring SCP Features](#).

**Configure**

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring 3GPP Timestamp Headers Support](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

**Observe**

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_transaction_time_exhausted_total`
- `ocscp_worker_timestamp_headers_validation_fail_total`
- `ocscp_nrfproxy_transaction_time_exhausted_total`
- `ocscp_oauth_transaction_time_exhausted_total`

This feature depends on accurate time synchronization between network functions (NFs) and the SCP. If the time between them is not synchronized, it can result in request routing failures due to incorrect calculations of timeout values.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.15.2 Support for Multiple 3gpp-Sbi-Binding Headers

SCP enhanced its capabilities to support multiple 3GPP-SBI-binding headers within a single Service-Based Interface (SBI) message. In accordance with the support for additional standard HTTP2 headers specified in 3GPP TS 29.500, the SCP routes SBI request and response messages that contain multiple 3GPP-SBI-binding headers. It ensures the headers in the messages are forwarded to the producer exactly as received, without any additional processing or interpretation of the headers. The request and response messages includes:

- Notification messages
- Service messages

The feature supports the following header formats:

- Simple key-value pairs: `k=v1`, `k=v2`
- Array format: `k=[v1,v2]`

This feature is applicable to both Model C and Model D call flows and is implemented for the R16 deployment only.

#### Managing Support for Multiple 3gpp-Sbi-Binding Headers

##### Enable

Not applicable

##### Configure

Not applicable

##### Observe

There are no specific metrics and alerts required for the Multiple 3gpp-Sbi-Binding Headers.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

### 3.15.3 Support for 3gpp-Sbi-Custom-UDR-Nf-Group-Id

When an NF sends a SBI message request or response with the custom header, 3gpp-Sbi-Custom-UDR-Nf-Group-Id, SCP sends the message request or response, including the custom header, to the target NF.

#### Managing 3gpp-Sbi-Custom-UDR-Nf-Group-Id Header Support at SCP

##### Enable

This feature doesn't require a flag to be enabled or disabled and is enabled by default.

##### Configure

There's no specific configuration required for this feature.

##### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.16 Enhanced NF Status Processing

In older SCP releases, SCP removes routing rules when SCP receives an NFProfile with the SUSPENDED status.

With the enhanced NF Status Processing feature, Service Communication Proxy (SCP) provides the following 5G Service Based Interface (SBI) message request routing modes when an NFProfile is in the SUSPENDED state:

- Mode 1: SCP does not route message requests to producer NFs that are in the SUSPENDED state.
- Mode 2: SCP routes the message request to the target producer NF even if it is in the SUSPENDED state.
- Mode 3: SCP routes the message request to producer NFs that are in the SUSPENDED state only if alternate REGISTERED producer NFs are unavailable.

#### ① Note

When an NFProfile is SUSPENDED, it remains in the SUSPENDED state for an infinite duration unless NRF marks it as REGISTERED, or it gets DE-REGISTERED.

In case of Mode 2 routing, when SCP receives a 5G SBI message request from a consumer NF, SCP considers all NFs that are configured using the `suspendedStateRouting` REST API parameter to route the message request.

In case of Mode 3 routing, when SCP receives a 5G SBI message request from a consumer NF, if the target producer NF is `SUSPENDED`, SCP routes the message to the first alternate producer NF, which is in the `REGISTERED` state. If the alternate `REGISTERED` producer NF is unavailable or responds with an error response, SCP routes the message request to the next available producer NF, which is in the `REGISTERED` state.

After exhausting all the routing attempts on `REGISTERED` producer NFs, if alternate routing attempts are available, SCP routes the message request to the `SUSPENDED` producer NFs if the `enhanced_nf_status_processing.enhancedSuspendedStateRouting` REST API parameter is set for a particular NF type. Otherwise, SCP returns the same error response to the consumer NF that it received due to the routing attempted on the last producer NF. SCP determines the target producer NF using the "3gpp-Sbi-Target-apiRoot" header and NF Set ID in the message request.

#### Note

You must not configure the same NF type for `enhancedSuspendedStateRouting` and `suspendedStateRouting` for both Mode 2 and Mode 3.

## Managing Enhanced NF Status Processing

### Enable

You can enable this feature using the CNC Console as described in [Configuring SCP Features](#).

### Configure

You can enable and configure one of the following routing modes of this feature:

- Mode 1: Set `enhanced_nf_status_processing` to `false`.
- Mode 2: Set `enhanced_nf_status_processing` to `true` and configure `suspendedStateRouting`.
- Mode 3: Set `enhanced_nf_status_processing` to `true` and `enhancedSuspendedStateRouting` must be present.

For more information about the above mentioned REST API parameters, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

For information about metrics, see [Metrics](#).

### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).




## 3.17 Location Header for Host Mismatch

According to 3GPP, a consumer NF is expected to use the received "Location" header content while sending subsequent message requests. After receiving a subsequent request, consumer SCP extracts the producer NF details from the API prefix in the "3gpp-Sbi-Target-Apiroot" header and selects an appropriate inter-SCP path to route the request.

SCP matches the authority (FQDN or IP) in "Location" header of the "201 Created" response with the producer's authority (FQDN or IP) where the message request was sent. If the FQDN or IP in the response is different, producer SCP provides the producer's NF details as an API prefix in the "Location" header of the "201 Created" response. If the FQDN or IP is the same, the "Location" header does not perform any modification.

This feature has been introduced to correct inter-SCP routing in the above scenario.

**Figure 3-4 Initial and Subsequent Request Routing Supported at SCP**

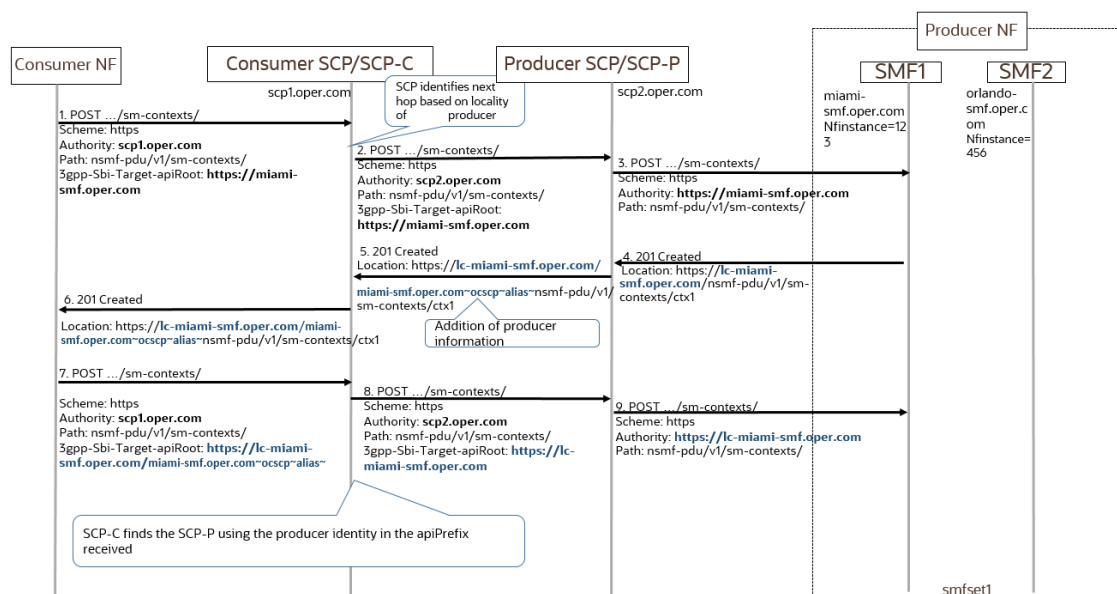

### Managing Location Header for Host Mismatch

#### Enable

By default, this feature is disabled. To enable this feature, you must set the `location_hdr_update_for_host_mismatch` option to true as described in [Configuring SCP Features](#).

#### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about configuring this feature, see [Configuring SCP Features](#) to enable the location header update for host mismatch feature.
- **Configure using REST API:**  
Previously, SCP used to support the above scenario through a Helm configuration in `values.yaml` using the `fqdnAliasingEnabled` field. Now a REST API parameter, `location_hdr_update_for_host_mismatch`, is introduced to enable this feature.

For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.18 Support for the Client Credentials Assertion Header

The 3GPP introduced Client Credentials Assertion (CCA) enables the NRF or the producer NF to authenticate the consumer NF when using indirect communication through SCP. The CCAs are JSON web tokens and are secured with digital signatures based on JSON Web Signature (JWS). The consumer NF adds the 3gpp-Sbi-Client-Credentials header containing the CCA. The CCA contains the following:

- The NF instance ID of the consumer NF (subject)
- A timestamp (iat) and an expiration time (exp)
- The NF type of the expected audience, such as the NRF type or the NF type of the producer NF

The consumer NF digitally signs the generated CCA based on its private key. The signed CCA contains one of the following fields:

- The X.509 URL (x5u) to refer to a resource for the X.509 public key certificate or certificate chain used for signing the client authentication assertion
- The X.509 Certificate Chain (x5c) includes the X.509 public key certificate or certificate chain used for signing the client authentication assertion

### Note

SCP supports the 3gpp-Sbi-Client-Credentials header with x5c - X.509 URL, not x5u - X.509 URL.

**Table 3-21 CCA Contents**

| Claim                                 | Description                                                                                                                                                                                                                                                     |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| audience (aud)                        | NF type of the producer NF whose services are requested and/or NRF                                                                                                                                                                                              |
| expiration time (exp)                 | Timestamp of CCA expiration                                                                                                                                                                                                                                     |
| subject (sub)                         | NF instance ID of consumer NF                                                                                                                                                                                                                                   |
| timestamp (iat)                       | Timestamp of CCA generation                                                                                                                                                                                                                                     |
| Security details used for signing CCA | <ul style="list-style-type: none"> <li>• x5u - X.509 URL that refers to a resource for the X.509 public key certificate or certificate chain</li> <li>• x5c - X.509 Certificate Chain includes the X.509 public key certificate or certificate chain</li> </ul> |

The NRF, or producer NF, performs the CCA verification. It verifies that the public key certificate used to sign the CCA contains the same NF instance ID as the consumer's NF instance ID in the CCA. If the verification of the CCA fails at the receiving entity, a "403" response is returned with the cause attribute set to CCA\_VERIFICATION\_FAILURE.

If some rouge consumer NF acquires a valid CCA from some other consumer NF and uses it as its own CCA, then the CCA validation by the NRF or producer NF creates a security gap. Therefore, additional CCA validations on SCP are needed to mitigate this security impact. The NF instance ID of the NFs in the CCA must match the NF instance ID in the certificate used in the TLS connection by the consumer NF as part of the SCP validations.

### Managing Client Credentials Assertion Header

#### Enable

By default, this feature is disabled. To enable this feature, you must complete the configuration as described in the following configuration section.

#### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about configuring this feature, see:
  - [Configuring SCP Features](#) to enable the CCA Header Validation feature
  - [Configuring Error Profile](#) to edit the error profiles
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features" and "Configuring Error Profile" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_cca_validation_failed_total`
- `ocscp_worker_cca_validation_feature_enabled_without_https`
- `ocscp_worker_cca_validation_performed_total`

Added the `SCPCcaFeatureEnabledWithoutHttps` alert in the [Alerts](#) section.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.19 Support for 5G SBI Message Correlation using the 3gpp-Sbi-Correlation-Info Header

The 3gpp-Sbi-Correlation-Info header contains correlation information, User Equipment (UE) identity that is used by an operator in various offline network management, performance

analysis, and troubleshooting tools and applications to identify messages (requests, responses, subscriptions, and notifications) related to a particular subscriber.

In this header, the UE identifier used is Subscription Permanent Identifier (SUPI), and the SUPI type is an International Mobile Subscriber Identity (IMSI). For example, 3gpp-Sbi-Correlation-Info: imsi-345012123123123

SCP efficiently routes message requests, along with the 3gpp-Sbi-Correlation-Info header, to the designated producer NFs. In cases where the correlation header is absent in the response from the target producer NF, SCP forwards the response to the consumer NF while appending the same 3gpp-Sbi-Correlation-Info header received in the request message. Additionally, when the correlation header is present in the request message and SCP generates an error response, SCP includes the correlation header in the response to the consumer NF. This ensures smooth and consistent correlation of 5G SBI messages throughout the system.

SCP adds the correlation header in the following cases if the request from the consumer contains this header:

- Access token requests toward NRF received from Model-C consumer NF.
- Discovery requests or access token requests toward NRF received in service request for delegated discovery in Model-D.
- During alternate routing.
- All the transaction in SCP is forwarded with correlation header toward traffic feed server to save the data in Traffic Feed OCNADD.

### Managing Support for 3gpp-Sbi-Correlation-Info Header

#### Enable

Not applicable

#### Configure

Not applicable

#### Observe

There is no specific metrics and alerts required for the Support for 3gpp-Sbi-Correlation-Info Header.

## 3.20 SCP Health Check API

In the previous release, consumer NFs used to send Service Based Interface (SBI) message requests to SCP without checking the status of SCP because there was no health check mechanism implemented at SCP.

Using the SCP Health Check Application Programming Interface (API) feature, consumer NFs can determine the health status of SCP before forwarding any SBI message request to SCP. This feature allows consumer NFs or SCP-C, which is a consumer SCP, to perform the following health check verification on SCP:

- SCP Reachable: Determines if SCP is reachable through the transport path.
- SCP Available: Determines if SCP is available to provide responses to SBI message requests.

**Note**

- This feature supports HTTP/2
- Health check fails if either of the above mentioned requirements is not achieved.

SCP provides the RESTful health check service Uniform Resource Identifier (URI) (`{scpapiRoot}/{apiVersion}/status`) to consumer NFs to confirm its availability to process the message requests. Consumer NFs can use the following URI to get the status of SCP:

- Method: OPTIONS
- Resource URIs:
  - `<scheme>://<Scp-worker Fqdn>:<Port>/{apiVersion}/status`
  - `<scheme>://<Scp-worker Fqdn>:<Port>/{apiPrefix}/{apiVersion}/status`

This feature facilitates consumer NFs to determine the health status of SCPs by sending the health query request to SCPs. Based on the health query response, consumer NFs decide whether to send SBI message requests to that SCP or perform alternate routing on other healthy SCP.

SCP uses the following process to provide its health status to a consumer NF:

1. When SCP receives a health query request, it calculates its overall average load by considering the load of each SCP-Worker instance present in that SCP.
2. SCP compares the overall average load with the configured values of the `avgScpLoadThresholdValue` REST API parameter as described in "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
3. If the overall average load value is more than the value of `avgScpLoadThresholdValue`, SCP is considered as unhealthy and SCP sends error responses to the consumer NF based on the `healthCheckErrorProfile` parameter as described in "Configuring Error Profiles" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
4. If the overall average load value is less than or equal to the value of `avgScpLoadThresholdValue`, SCP is considered as healthy and SCP sends one of the following responses to the consumer NF based on the configuration:
  - **200WithPayload:** Sends 200 OK response code with the overall average load information of SCP.
  - **200WithEmptyPayload:** Sends 200 OK response code without the overall average load information of SCP.
  - **204WithNoContent:** Send only 204 response code with no other information.

### Inter-SCP Health Check

In inter-SCP health check scenarios, a consumer SCP-C performs health check query on peer SCP instances before sending any SBI message request.

When a consumer SCP-C receives a health query request from a consumer NF, it checks for the availability of a healthy SCP-P to which the SBI message request can be forwarded.

The following procedure describes how a consumer SCP-C checks the status of peer producer SCP-P instances:

1. SCPC-Notification sends the InterScpList to SCPC-Audit through REST APIs if the isScpHealthCheckSvcEnabled REST API parameter is enabled. For more information about this parameter, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
2. SCPC-Configuration sends the configuration information, such as isScpHealthCheckSvcEnabled, time interval to trigger periodic health query polls, number of consecutive positive responses, number of negative responses, and so on, to SCPC-Audit.
3. SCPC-Audit periodically triggers health check query polls to SCP-P through SCP-Worker of SCP-C with 3gppapiroot: scp-pfqdn+ruriPath of health query if the isScpHealthCheckSvcEnabled REST API parameter is enabled.
4. SCP-Worker forward the health query request received from SCPC-Audit toward SCP-P.
5. SCP-P responds with its health query status.
6. SCPC-Audit obtains the response for the health query request from SCP-P through SCP-Worker.
7. SCPC-Configuration sends the configuration information, such as isScpHealthCheckSvcEnabled, time interval to trigger periodic health query polls, number of consecutive positive responses, number of negative responses, and so on, to SCP-Worker.
8. SCPC-Audit sends the health status of the inter-SCPs to SCP-Worker for the inter-SCP messages processing.

## Managing SCP Health Check API

### Enable

By default, this feature is enabled at the ingress side. However, in case of inter-SCP scenarios, this feature is disabled by default. To enable this feature, you must set the health\_check option to true as described in [Configuring SCP Features](#).

### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Features](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features" and "Configuring Error Profiles" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

The following metrics are added in the [Metrics](#) section:

- ocscp\_worker\_health\_check\_rx\_req\_total
- ocscp\_worker\_health\_check\_success\_res\_total
- ocscp\_worker\_health\_check\_error\_res\_total
- ocscp\_interscp\_health\_check\_status\_success\_total
- ocscp\_interscp\_health\_check\_status\_failure\_total
- ocscp\_health\_check\_status\_failed
- ocscp\_interscp\_health\_check\_status\_failed

- ocsdp\_audit\_interscp\_health\_check\_tx\_req\_total
- ocsdp\_audit\_interscp\_health\_check\_rx\_res\_total

The following alerts are added in the [Alerts](#) section:

- [SCPHealthCheckFailedForPeerSCP](#)
- [SCPHealthCheckFailed](#)

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.21 Verbose Logging for SCP

SCP warn and error level logs are enhanced to display more information to ease the troubleshooting process for various issues in the production environment.

The Verbose Logging for SCP feature defines a common log format to include required information to enhance debugging process for WARN and ERROR level logs. Using the following log format, ERROR and WARN level logs are modified to standardize the log format, add more details, and enhance readability:

The following is the log level format for SCP-Worker and SCP-nrfProxy microservices:

- WARN: Category: <<category>>, Event: <<Event>>, Details: <<Message\_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, Details: <<Message\_Details>>, Exception: {Cause:<<Exception\_cause>>, Message: <<Exception\_Message>>, StackTrace: <<Exception\_Stacktrace>>}

The following is the log level format for SCPC-Notification microservice:

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message\_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message\_Details>>, Exception:{Cause:<<Exception\_cause>>, Message: <<Exception\_Message>>, StackTrace: <<Exception\_Stacktrace>>}

The following is the log level format for SCPC-Audit microservice:

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message\_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message\_Details>>, Exception:{Cause:<<Exception\_cause>>, Message: <<Exception\_Message>>, StackTrace: <<Exception\_Stacktrace>>}

OR

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, CustomString: <<Audit-Type>>, Details: <<Message\_Details>>



- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, CustomString: <<Audit-Type>>, Details: <<Message\_Details>>, Exception: {Cause:<<Exception\_cause>>, Message: <<Exception\_Message>>, StackTrace: <<Exception\_Stacktrace>>}

The following is the log level format for SCP-Load-Manager microservice:

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message\_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message\_Details>>, Exception:{Cause:<<Exception\_cause>>, Message: <<Exception\_Message>>, StackTrace: <<Exception\_Stacktrace>>}

The following is the log level format for the SCP-Cache microservice:

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message\_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message\_Details>>, Exception:{Cause:<<Exception\_cause>>, Message: <<Exception\_Message>>, StackTrace: <<Exception\_Stacktrace>>}

#### Note

- This feature supports SCP-Worker and SCP-nrfProxy microservice with WARN and ERROR level logs.
- SCP is deployed with WARN level log in the production environment. This is applicable for SCP-Worker and SCP-nrfProxy microservice.
- SCP is deployed with INFO level log in the production environment. This is applicable for SCPC-Notification, SCPC-Audit, SCP-Load-Manager, and SCP-Cache microservices.

The SCP log format is made verbose to follow a common format for WARN and ERROR log levels to determine and investigate issues in various events as described in the following table:

**Table 3-22 Log Attributes**

| Log Attribute        | Description                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Category             | Determines the category of log messages.                                                                                                                                                                                                                                                                                                                                                                                    |
| Event                | Represents logged message event type.                                                                                                                                                                                                                                                                                                                                                                                       |
| EventID              | Unique ID to identify associated category and sub category for logged message. EventID format: OSCP-XXX-YY-ZZZ, where <ul style="list-style-type: none"> <li>• XXX: Represents Micro service codes</li> <li>• YY: Represents Category</li> <li>• ZZZ: Represents Event TYPE</li> </ul> <b>Note:</b> This log attribute is only applicable for SCPC-Notification, SCPC-Audit, SCP-Load-Manager, and SCP-Cache microservices. |
| Message_Details      | Represents the actual message defining the error.                                                                                                                                                                                                                                                                                                                                                                           |
| Exception_cause      | Returns the cause of an error.                                                                                                                                                                                                                                                                                                                                                                                              |
| Exception_Message    | Represents actual exception message.                                                                                                                                                                                                                                                                                                                                                                                        |
| Exception_Stacktrace | Contains complete stack trace which is causing the error.                                                                                                                                                                                                                                                                                                                                                                   |



Table 3-22 (Cont.) Log Attributes

| Log Attribute | Description                                                                                                                                                                                                                                         |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CustomString  | Represents a custom string field with enumerated valid values.<br><b>Note:</b> This log attribute is only applicable for SCPC-Audit microservice. In Audit microservice, the AuditType can have specific values such as SCHEDULED or OnDemandAudit. |

The new log format provides comprehensive information about an issue comprising issue category, event name, and detailed description of the issue to help you identify and resolve errors.

The following table describes log levels for SCP-Worker for various event types:

Table 3-23 Log Levels for SCP-Worker

| Category     | Event                          | Log Level | Description                                                                                                                                          |
|--------------|--------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| UP_STREAM    | CONNECTION_TIME_OUT            | ERROR     | This event is raised when the connection fails due to connect timeout expiry.                                                                        |
|              | REQUEST_TIMEOUT                | WARN      | This event is raised when message request processing fails due to the message response not being received within the configured time.                |
|              | RESPONSE_TIMEOUT               | WARN      | This event is raised when the response processing time is more than the configured time.                                                             |
|              | RETRY_COUNT_EXHAUSTED          | WARN      | This event is raised when message request routing fails because all retry attempts are exhausted. All retry attempts lead to unsuccessful responses. |
| OVERLOAD     | POD_OVERLOAD                   | WARN      | This event specifies the transition of pod overload state from one state to another.                                                                 |
|              | PENDING_TRANSACTION_OVERLOAD   | ERROR     | This event is raised when the pending transaction count reaches the configured threshold level.                                                      |
| HEALTH_CHECK | READINESS_FAILURE              | ERROR     | This event is raised when cache members or routing options are unavailable or the rule engine is down.                                               |
|              | THREAD_STATUS                  | ERROR     | This event is raised when thread watchdog detects a thread is stuck.                                                                                 |
| ROUTING      | DESTINATION_SEARCH_EXHAUSTED   | WARN      | This event is raised when no further valid destination is found for routing, all eligible producer NFs are attempted.                                |
|              | RULE_NOT_FOUND                 | WARN      | This event is raised when routing rules are not found for the selected producer NFs to route messages.                                               |
|              | INVALID_API_VERSION_IN_REQUEST | WARN      | This event is raised when no matching rule is found for the API version received in request.                                                         |
|              | RELEASE16_VALIDATION_FAILED    | WARN      | This event is raised when any Rel16 message validation fails.                                                                                        |
|              | MESSAGE_LOOP_DETECTED          | WARN      | This event is raised when SCP detects a message loop for a request if it has a VIA header containing SCP's self FQDN.                                |

Table 3-23 (Cont.) Log Levels for SCP-Worker

| Category           | Event                          | Log Level | Description                                                                                                                                                                                     |
|--------------------|--------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                    | DESTINATION_CONGESTED          | WARN      | This event is raised when SCP detects that the selected destination is congested.                                                                                                               |
|                    | DESTINATION_CONNECTION_FAILURE | WARN      | This event is raised when the upstream connection fails.                                                                                                                                        |
|                    | INVALID_OR_EMPTY_DETAILS       | ERROR     | This event is raised when any routing related data is empty or contains invalid data.                                                                                                           |
|                    | MISCELLANEOUS                  | WARN      | This event is raised when any warning is raised due to miscellaneous reasons, such as failure in inter-plmn rule creation, handling routing failure responses, and so on.                       |
| INTERNAL           | INTERNAL_SERVER_ERROR          | ERROR     | This event is raised when an internal error, such as monitoring of Kubernetes resources, failure to load or validate SSL certificates, object invocation, pegging of metrics, and so on, occur. |
|                    | CONVERSION_FAILURE             | ERROR     | This event is raised due to unsupported formats, type cast, object formation, and parsing failures.                                                                                             |
|                    | INITIALIZATION_FAILED          | ERROR     | This event is raised when any class initialization fails, such as Jetty client and Kafka admin client creation.                                                                                 |
|                    | MISCELLANEOUS                  | WARN      | This event is raised when any failure in retrieval or updating of values to an object or due to unexpected event method execution.                                                              |
| DATA_SYNC          | SSE_FAILURE                    | ERROR     | This event is raised due to connectivity issue with the SCPC-Configuration or SCPC-Notification microservice that impacts data retrieval.                                                       |
|                    | CONFIG_DATA_PARSE              | ERROR     | This event is raised when parsing failed for the received config data.                                                                                                                          |
|                    | RULE_ENGINE                    | ERROR     | This event is raised when routing rules fail to synchronize and update routing rules from the SCPC-Notification microservice.                                                                   |
|                    | KEEP_ALIVE                     | WARN      | This informational event is raised when the received Keep Alive and Config connectivity are up.                                                                                                 |
|                    | INVALID_DATA                   | WARN      | This event is raised when any incorrect configuration data is received due to missing parameters in any configuration.                                                                          |
|                    | CONFIG_UPDATE                  | WARN      | This event is raised when any failure occurs while fetching or updating configuration values received from the SCPC-Configuration microservice.                                                 |
| CACHE              | CACHE_INITIALIZATION           | ERROR     | This event is raised when the initialization of the coherence cache fails.                                                                                                                      |
|                    | CACHE_READ_WRITE_FAILURE       | WARN      | This event is raised when any read or write operation fails for the cache.                                                                                                                      |
|                    | CACHE_INVALID_OR_EMPTY_DETAILS | WARN      | This event is raised when any incorrect or empty data from the cache is received.                                                                                                               |
| MESSAGE_VALIDATION | CCA_HEADER_VALIDATION          | ERROR     | This event is raised when the validation for the CCA header fails.                                                                                                                              |
|                    | OCI_HEADER_VALIDATION          | ERROR     | This event is raised when parsing the OCI Header data.                                                                                                                                          |

**Table 3-23 (Cont.) Log Levels for SCP-Worker**

| Category        | Event                    | Log Level | Description                                                                                      |
|-----------------|--------------------------|-----------|--------------------------------------------------------------------------------------------------|
| TASK_PROCESSING | MODEL_CACHE_UPDATE_ERROR | ERROR     | This event is raised when updating the modelD cache fails upon receiving a profile notification. |
|                 | DATA_POLLING_FAILURE     | ERROR     | This event is raised when polling data from the Notification MS fails.                           |

The following table describes log levels for SCP-nrfProxy for various event types:

**Table 3-24 Log Levels for SCP-nrfProxy**

| Category     | Event                                    | Log Level | Description                                                                                                                                                               |
|--------------|------------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UP_STREAM    | REQUEST_TIMEOUT                          | WARN      | This event is raised when request processing fails due to response not received within configured time.                                                                   |
|              | RETRY_COUNT_EXHAUSTED                    | WARN      | This event is raised when message request routing fails because all retry attempts are exhausted. All retry attempts lead to unsuccessful responses.                      |
| HEALTH_CHECK | READINESS_FAILURE                        | ERROR     | This event is raised when cache members or routing options are unavailable or the rule engine is down.                                                                    |
|              | THREAD_STATUS                            | ERROR     | This event is raised when thread watchdog detects a thread is stuck.                                                                                                      |
| ROUTING      | DESTINATION_SEARCH_EXHAUSTED             | WARN      | This event is raised when no further valid destination is found for routing, all eligible producer NFs are attempted.                                                     |
|              | RULE_NOT_FOUND                           | WARN      | This event is raised when routing rules are not found for the selected producer NFs to route messages.                                                                    |
|              | DESTINATION_WEBCLIENT_CONNECTION_FAILURE | WARN      | This event is raised when upstream connection establishment fails.                                                                                                        |
|              | INVALID_OR_EMPTY_DETAILS                 | ERROR     | This event is raised when any routing related data is empty or contains invalid data.                                                                                     |
|              | MISCELLANEOUS                            | WARN      | This event is raised when any warning is raised due to miscellaneous reasons, such as failure in inter-plmn rule creation, handling routing failure responses, and so on. |
| INTERNAL     | INTERNAL_SERVER_ERROR                    | ERROR     | This event is raised when an internal error occurs, such as a failure to read the application.properties file or a failure in the registration of NRF-specific details.   |
|              | CONVERSION_FAILURE                       | ERROR     | This event is raised due to unsupported formats, type cast, object formation, and parsing failures.                                                                       |
|              | INITIALIZATION_FAILED                    | ERROR     | This event is raised when any class initialization fails, such as Jetty client and Kafka admin client creation.                                                           |
|              | MISCELLANEOUS                            | WARN      | This event is raised when any failure in retrieval or updating of values to an object or due to unexpected event method execution.                                        |

**Table 3-24 (Cont.) Log Levels for SCP-nrfProxy**

| Category        | Event                         | Log Level | Description                                                                                                                                     |
|-----------------|-------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| DATA_SYNC       | SSE_FAILURE                   | ERROR     | This event is raised due to connectivity issue with the SCPC-Configuration or SCPC-Notification microservice that impacts data retrieval.       |
|                 | CONFIG_DATA_PARSE             | ERROR     | This event is raised when parsing failed for the received config data.                                                                          |
|                 | KEEP_ALIVE                    | WARN      | This informational event is raised when the received Keep Alive and Config connectivity are up.                                                 |
|                 | INVALID_DATA                  | WARN      | This event is raised when any incorrect configuration data is received due to missing parameters in any configuration.                          |
|                 | CONFIG_UPDATE                 | WARN      | This event is raised when any failure occurs while fetching or updating configuration values received from the SCPC-Configuration microservice. |
| TASK_PROCESSING | OPTIONAL_CACHING_MODELD_ERROR | ERROR     | This event is raised when an exception occurs during the execution of the optional caching logic.                                               |
|                 | MODEL_CACHE_UPDATE_ERROR      | ERROR     | This event is raised when the Model D cache update fails after receiving a profile notification.                                                |
|                 | DATA_POLLING_FAILURE          | ERROR     | This event is raised when polling data from the Notification microservice.                                                                      |

The following table describes log levels for SCPC-Notification for various event types:

**Table 3-25 Log Levels for SCPC-Notification**

| Category          | Event                    | EventID               | Description                                                             | Cause                                                                                                                                                                                                                                                                                                                                           | Action                                                                                                 |
|-------------------|--------------------------|-----------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| READINESS_FAILURE | DB_RECORDS_NOT_AVAILABLE | OSCP-NTF-RDYNES-EV001 | This event is raised when the default database records are not created. | This event is raised when default database records for the following are not created: <ul style="list-style-type: none"> <li>• Canary Release</li> <li>• SCP Profile</li> <li>• NRF Details</li> <li>• Routing Options</li> <li>• System Options</li> <li>• Virtual Services</li> <li>• Service Entries</li> <li>• Destination Rules</li> </ul> | Check if the database is up and running and if the connection to the database is functioning properly. |

Table 3-25 (Cont.) Log Levels for SCPC-Notification

| Category                         | Event                         | EventID               | Description                                                                                                                             | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Action                                                                                                                                           |
|----------------------------------|-------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
|                                  | REQUIRE_D_DATA_NOT_AVAILABLE  | OSCP-NTF-RDYNES-EV002 | This event is raised due to a readiness check failure.                                                                                  | <p>This event is raised if the readiness check fails due to any of the following data being unavailable in the database:</p> <ul style="list-style-type: none"> <li>• Canary Release</li> <li>• SCP Profile</li> <li>• NRF Details</li> <li>• Routing Options</li> <li>• System Options</li> <li>• Virtual Services</li> <li>• Service Entries</li> <li>• Destination Rules</li> </ul>                                                                                                                                                                                                                                                                                                      | Check if the database is up and running, if the connection to the database is successful, and if the required data is available in the database. |
| LIVENESS_FAILURE                 | THREAD_WATCHDOG_FAILURE       | OSCP-NTF-LIVNES-EV001 | This event is raised whenever any threads become stuck.                                                                                 | This event is raised whenever the liveness check fails due to one or more threads being stuck.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Check if there are any threads stuck.                                                                                                            |
|                                  | QUEUE_FULL                    | OSCP-NTF-LIVNES-EV002 | This event is raised whenever the liveness probe condition fails and the application restarts due to the notification queue being full. | This event is triggered whenever the liveness probing condition fails and the application restarts due to the notification queue being full.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Check whether the notification queue is full.                                                                                                    |
| NF_RULE_CREATE_OR_UPDATE_FAILURE | NF_PROFILE_VALIDATION_FAILURE | OSCP-NTF-RULUPD-EV001 | This event is raised when NF profile validation fails.                                                                                  | <p>NF profile validation can fail due to:</p> <ul style="list-style-type: none"> <li>• Missing mandatory fields such as nfType, event, nfStatus, nfInstanceId</li> <li>• Invalid nfInstanceId</li> <li>• Any exception occurring while checking for duplicate locality in the NF profile</li> <li>• Load Balancer IP is enabled but missing in the NF profile</li> <li>• Invalid HOST</li> <li>• Invalid serviceName</li> <li>• Invalid IPAddress</li> <li>• Invalid NfServiceFqdn</li> <li>• Duplicate IpEndPoints/ServiceInstanceIDs</li> <li>• SCP receives a notification of a duplicate SCP NF profile</li> <li>• SCP receives a notification of a duplicate NRF NF profile</li> </ul> | Check the NF profile data.                                                                                                                       |

Table 3-25 (Cont.) Log Levels for SCPC-Notification

| Category | Event                               | EventID               | Description                                                                                                                                                                                                                                                                            | Cause                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Action                                                                                                                    |
|----------|-------------------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
|          | RULE_PROCESSING_FAILURE             | OSCP-NTF-RULUPD-EV002 | This event is raised when rule creation fails.                                                                                                                                                                                                                                         | Rule creation or update can fail due to: <ul style="list-style-type: none"> <li>Notification received for partial profile updates for an unknown nfnInstanceId</li> <li>NF_PROFILE_CHANGED event contains both NFProfile and ProfileChanges</li> <li>Exception occurs while handling events for DNS SRV</li> <li>Failed to trigger GET request to NRF to retrieve the latest profile or received a null or error response</li> <li>Any other unknown error occurs while processing the notification</li> </ul> | Check the logs for more detailed information                                                                              |
|          | NF_PROFILE_REFINEMENT_ERROR         | OSCP-NTF-RULUPD-EV003 | This event is raised when: <ul style="list-style-type: none"> <li>IOException or ApiException occurs during data refinement in NFService</li> <li>An exception is encountered due to incorrect configuration for the profile while creating a refined version of NFProfile.</li> </ul> | This event is raised when: <ul style="list-style-type: none"> <li>IOException or ApiException occurs during data refinement in NFService</li> <li>An exception is encountered due to incorrect configuration for the profile while creating a refined version of NFProfile.</li> </ul>                                                                                                                                                                                                                         | Check the NF profile configuration.                                                                                       |
|          | DB_UPDATE_FAILURE                   | OSCP-NTF-RULUPD-EV004 | This event is raised when saving data to the database fails.                                                                                                                                                                                                                           | This event is raised when saving to the database fails during the creation or update of NF rules.                                                                                                                                                                                                                                                                                                                                                                                                              | Check the database connection.                                                                                            |
|          | DB_READ_FAILURE                     | OSCP-NTF-RULUPD-EV005 | This event is raised when reading data from the database fails.                                                                                                                                                                                                                        | This event is raised if reading data from the database fails during the creation or update of NF rules.                                                                                                                                                                                                                                                                                                                                                                                                        | Check the database connection.                                                                                            |
|          | DB_DELETE_FAILURE                   | OSCP-NTF-RULUPD-EV006 | This event is raised when a database deletion operation fails.                                                                                                                                                                                                                         | This event is raised when deleting from the database fails during the creation or update of NF rules.                                                                                                                                                                                                                                                                                                                                                                                                          | Check the database connection.                                                                                            |
|          | RULE_CREATE_OR_UPDATE_MISCELLANEOUS | OSCP-NTF-RULUPD-EV007 | This event is raised when rule creation fails due to miscellaneous reasons.                                                                                                                                                                                                            | This event is raised when rule creation fails due to various issues, such as a notification from the audit microservice having a timestamp earlier than the SCP processed timestamp.                                                                                                                                                                                                                                                                                                                           | Check whether the timestamp of the notification pushed from the audit microservice is behind the SCP processed timestamp. |

Table 3-25 (Cont.) Log Levels for SCPC-Notification

| Category                  | Event                              | EventID               | Description                                                                                                  | Cause                                                                                                                                                                                                           | Action                                                                                                                                   |
|---------------------------|------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
|                           | RULE_CREATE_OR_UPDATE_ABORTED      | OSCP-NTF-RULUPD-EV008 | This event is raised when rule creation is aborted due to failures.                                          | This event is raised when rule creation is aborted due to a notification pushed from the configuration microservice, and the timestamp of the configuration notification is behind the SCP processed timestamp. | Check the timestamps and verify if the notification microservice has already processed the received notification from the configuration. |
|                           | QUEUE_FULL_WHEN_PROFILE_RECEIVED   | OSCP-NTF-RULUPD-EV009 | This event is raised when the notification queue is full.                                                    | This event is raised when the notification queue is full.                                                                                                                                                       | Check the notification queue size.                                                                                                       |
|                           | NF_PROFILE_IGNORED                 | OSCP-NTF-RULUPD-EV010 | This event is raised when the NF profile is ignored during the process.                                      | This event is raised when a received NF profile notification is ignored and not processed, such as when the profile is identified as a duplicate or does not meet the processing criteria.                      | Check the logs for the specific reasons.                                                                                                 |
| NF_RULE_DELETION_FAILURE  | RULE_DELETION_PROCESSING_FAILURE   | OSCP-NTF-RULDEL-EV001 | This event is raised when rule deletion fails due to certain errors or failures.                             | This event is triggered when the deletion of the rules fails due to miscellaneous reasons.                                                                                                                      | Check the logs for the specific reasons.                                                                                                 |
|                           | RULE_DELETION_ALREADY_DEREGISTERED | OSCP-NTF-RULDEL-EV002 | This event is raised when a deregistration request is received for an NF that has already been deregistered. | This event is raised when a deregistration request is received for an NF that has already been deregistered.                                                                                                    | Check if the received deregistration request is for an NF that has already been deregistered.                                            |
|                           | RULE_DELETION_ABORTED              | OSCP-NTF-RULDEL-EV003 | This event is raised when the deletion of a rule is aborted due to miscellaneous reasons.                    | This event is raised when rule deletion is aborted due to miscellaneous reasons, such as receiving a deregistration notification for the last NF instance.                                                      | Verify whether the received deregistration notification is for the last NF instance.                                                     |
|                           | RULE_DELETION_DB_READ_FAILURE      | OSCP-NTF-RULDEL-EV004 | This event is raised when there is a failure to delete a rule while reading from the database.               | This event is raised when an exception occurs while reading from the database during rule deletion.                                                                                                             | Check the database connection.                                                                                                           |
|                           | RULE_DELETION_DB_DELETE_FAILURE    | OSCP-NTF-RULDEL-EV005 | This event is raised when there is a failure to delete a rule from the database.                             | This event is raised when an exception occurs while reading from the database during rule deletion.                                                                                                             | Check the database connection.                                                                                                           |
| NF_RULE_PROCESSOR_FAILURE | RULE_PROCESSOR_MISCELLANEOUS       | OSCP-NTF-RULPRC-EV001 | This event is raised when rule processing fails due to miscellaneous reasons.                                | This event is raised when rule processing fails due to various reasons.                                                                                                                                         | Check the logs to identify the miscellaneous reasons.                                                                                    |
|                           | RULE_PROCESSOR_DB_READ_FAILURE     | OSCP-NTF-RULPRC-EV002 | This event is raised when rule processing fails due to a database read failure.                              | This event is raised when an exception occurs while reading from the database during rule deletion.                                                                                                             | Check the database connection.                                                                                                           |



Table 3-25 (Cont.) Log Levels for SPC-Notification

| Category  | Event                      | EventID               | Description                                                                                                                                    | Cause                                                                                                                                                | Action                                                                              |
|-----------|----------------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|           | RULE_PROCD_DELETE_FAILURE  | OSCP-NTF-RULPRC-EV003 | This event is raised when rule processing fails due to a database deletion failure.                                                            | This event is raised when rule processing fails due to a database delete operation failure.                                                          | Check the database connection.                                                      |
|           | RULE_PROCD_ABORTED         | OSCP-NTF-RULPRC-EV004 | This event is raised when rule processing fails due to receiving a notification from NRF for an NF configured as local.                        | This event is raised when rule processing fails due to receiving a notification from NRF for an NF configured as local.                              | Verify whether the received notification from NRF is for an NF configured as local. |
| INTERNAL  | INTERNAL_ERROR             | OSCP-NTF-INTRNL-EV001 | This event is raised whenever there is an internal error such as monitoring of Kubernetes resources, object invocation, or pegging of metrics. | This event is raised whenever there is an internal error, such as issues with monitoring Kubernetes resources, object invocation, or metric pegging. | Check the logs for more detailed information.                                       |
|           | CONVERSION_FAILURE         | OSCP-NTF-INTRNL-EV002 | This event is raised whenever there are failures in unsupported format/type casting, object formation, or parsing.                             | This event is raised whenever there are failures related to unsupported formats, type casting, object formation, or parsing.                         | Check the logs for more detailed information.                                       |
|           | INITIALIZATION_FAILURE     | OSCP-NTF-INTRNL-EV003 | This event is raised when there is a failure during class initialization.                                                                      | This event is raised whenever there is a failure in class initialization, loading, or queue initialization.                                          | Check the logs for more detailed information.                                       |
|           | MISCELLANEOUS              | OSCP-NTF-INTRNL-EV004 | This event is raised whenever there are failures in retrieving or updating values to an object, or during unexpected method execution.         | This event is raised whenever there is a failure in class initialization, loading, or queue initialization.                                          | Check the logs for more detailed information.                                       |
|           | DB_READ_FAILURE_AT_STARTUP | OSCP-NTF-INTRNL-EV005 | This event is raised whenever there is a database read failure during application startup.                                                     | This event is triggered whenever a database read failure occurs during application startup.                                                          | Check the database connection.                                                      |
|           | INTERNAL_DATA_NOT_FOUND    | OSCP-NTF-INTRNL-EV006 | This event is raised whenever required internal data is missing.                                                                               | This event is raised whenever required internal data, such as FQDN or IP addresses for the SCP profile, is missing.                                  | Check the SCP profile to ensure that all required internal data is provided.        |
| DATA_SYNC | CONFIG_DATA_PARSE_FAILURE  | OSCP-NTF-DATSYN-EV001 | This event is raised when parsing fails for received config data.                                                                              | This event is raised when parsing fails for the received configuration data.                                                                         | Check the logs for more detailed information.                                       |
|           | CONFIG_UPDATE_FAILURE      | OSCP-NTF-DATSYN-EV002 | This event is raised whenever there is a failure while fetching or updating configuration values received from the Config MS                   | This event is raised whenever SCP encounters a virtual service with empty or null host values.                                                       | Check if the virtual service has empty or null hosts.                               |



**Table 3-25 (Cont.) Log Levels for SCPC-Notification**

| Category                   | Event                                 | EventID                           | Description                                                                                                           | Cause                                                                                                                                         | Action                                                                                 |
|----------------------------|---------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
|                            | DATA_SY<br>NC_DB_R<br>EAD_FAIL<br>URE | OSCP-<br>NTF-<br>DATSYN-<br>EV003 | This event is raised when reading the data from DB fails in Server Sent Events (SSE) communications.                  | This event is raised when reading data from the database fails during SSE communications.                                                     | Check the connection to the database.                                                  |
|                            | CONFIG_<br>DATA_NO<br>T_FOUND         | OSCP-<br>NTF-<br>DATSYN-<br>EV004 | This event is raised when the configured data is not found in DB sync.                                                | This event is raised when the configured data is not found in the database synchronization.                                                   | Check the logs to verify if the requested feature-specific configurations are present. |
|                            | INVALID_<br>DATA                      | OSCP-<br>NTF-<br>DATSYN-<br>EV005 | This event is raised when the configured data is not found during database synchronization.                           | This event is raised whenever bad configuration data is received or parameters are missing in the configuration.                              | Check the logs for more detailed information.                                          |
| DBSNAPS<br>HOT_UPD<br>ATER | DB_SNAP<br>SHOT_RE<br>AD_FAILU<br>RE  | OSCP-<br>NTF-<br>DBSNH-<br>EV001  | This event is raised whenever an exception occurs while reading virtual services or serviceEntries from the database. | This event is raised whenever an exception occurs while reading Virtual Services or ServiceEntries from the database.                         | Check the database connection.                                                         |
| TASK_FAI<br>LURES          | TASK_SC<br>HEDULE_<br>FAILURE         | OSCP-<br>NTF-TSK-<br>EV001        | This event is raised when the system fails to schedule a data fetch task.                                             | This event is raised when the system fails due to internal errors, resource constraints, or unexpected exceptions during task initialization. | Check the logs for more detailed information.                                          |

The following table describes log levels for SCPC-Audit for various event types:

**Table 3-26 Log Levels for SCPC-Audit**

| Category                  | Event                                | EventID                           | Description                                                             | Cause                                                                                                                                                                                | Action                                                                                                 |
|---------------------------|--------------------------------------|-----------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| READINE<br>SS_FAILU<br>RE | DB_RECO<br>RDS_NOT<br>_AVAILAB<br>LE | OSCP-<br>AUD-<br>RDYNES-<br>EV001 | This event is raised when the default database records are not created. | This event is raised when default database records for the following are not created: <ul style="list-style-type: none"> <li>NRF Details</li> <li>VirtualServices for NRF</li> </ul> | Check if the database is up and running and if the connection to the database is functioning properly. |
| LIVENES<br>S_FAILUR<br>E  | THREAD_<br>WATCHD<br>OG_FAILU<br>RE  | OSCP-<br>NTF-<br>LIVNES-<br>EV001 | This event is raised whenever any threads become stuck.                 | This event is raised whenever the liveness check fails due to one or more threads being stuck.                                                                                       | Check if there are any threads stuck.                                                                  |

Table 3-26 (Cont.) Log Levels for SCPC-Audit

| Category         | Event                   | EventID               | Description                                                                                                                                                                                                                                                               | Cause                                                                                                                                                                                                                                                                     | Action                                                                 |
|------------------|-------------------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| AUDIT_FAILURE    | ERROR_RESPONSE_RECEIVED | OSCP-AUD-AUDFR-EV001  | This event is triggered whenever there is a failure in: <ul style="list-style-type: none"> <li>Parsing the response body from NRF</li> <li>Processing the NF profile</li> <li>Obtaining the NF profile from NRF</li> <li>Response processing failures from NRF</li> </ul> | This event is triggered whenever there is a failure in: <ul style="list-style-type: none"> <li>Parsing the response body from NRF</li> <li>Processing the NF profile</li> <li>Obtaining the NF profile from NRF</li> <li>Response processing failures from NRF</li> </ul> | Check the connection with NRF and verify the response coming from NRF. |
|                  | AUDIT_INTERNAL_FAILURE  | OSCP-AUD-AUDFR-EV002  | This event is raised whenever an exception occurs due to miscellaneous reasons while handling an AUDIT request.                                                                                                                                                           | This event is raised whenever an exception occurs due to miscellaneous reasons while handling an AUDIT request.                                                                                                                                                           | Check the logs for more detailed information.                          |
|                  | NRF_COMMUNICATION_ERROR | OSCP-AUD-AUDFR-EV003  | This event is raised whenever the connection with NRF fails while sending the AUDIT request.                                                                                                                                                                              | This event is raised whenever the connection with NRF fails while sending the AUDIT request.                                                                                                                                                                              | Check the connection with NRF.                                         |
|                  | DB_READ_FAILURE         | OSCP-AUD-AUDFR-EV004  | This event is raised when reading data from the database fails.                                                                                                                                                                                                           | This event is raised when reading data from the database fails.                                                                                                                                                                                                           | Check the connection with NRF.                                         |
| NRF_HEALTH_CHECK | HEALTH_CHECK_FAILED     | OSCP-AUD-HLTCHK-EV001 | This event is raised when the connection with NRF fails while sending the Health Check request to NRF as part of the AUDIT.                                                                                                                                               | This event is raised when the connection with NRF fails while sending the Health Check request to NRF as part of the AUDIT.                                                                                                                                               | Check the connection with NRF.                                         |
|                  | AUDIT_ABORTED           | OSCP-AUD-HLTCHK-EV002 | This event is raised when no NF is configured to learn from NRF.                                                                                                                                                                                                          | This event is raised when there are no NF configured to learn from the NRF.                                                                                                                                                                                               | Check if any NFs are configured to learn from the NRF.                 |
|                  | NO_REGION_FOUND         | OSCP-AUD-HLTCHK-EV003 | This event is raised when no NRF is found to be healthy at the moment.                                                                                                                                                                                                    | This event is raised when no NRF is found to be healthy at the moment.                                                                                                                                                                                                    | Check if there are any healthy NRFs available.                         |
| INTERNAL         | INTERNAL_ERROR          | OSCP-AUD-INTRNL-EV001 | This event is raised whenever an internal error occurs, such as issues with monitoring Kubernetes resources, object invocation, pegging of metrics, and so on.                                                                                                            | This event is raised whenever there is an internal error, such as issues with monitoring Kubernetes resources, object invocation, or pegging of metrics.                                                                                                                  | Check the logs for more detailed information.                          |

Table 3-26 (Cont.) Log Levels for SCPC-Audit

| Category | Event                               | EventID               | Description                                                                                                                                                                                                   | Cause                                                                                                                                                                                                         | Action                                                                                                       |
|----------|-------------------------------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
|          | MISCELLANEOUS                       | OSCP-AUD-INTRNL-EV002 | This event is raised whenever an NF Profile record for the specified Instance ID does not exist in the database table while adding it to the Missed De-Register notification list as part of the AUDIT.       | This event is raised whenever an NF profile record for this instance ID does not exist in the database table while adding it to the missed de-register notification list as part of the audit.                | Check the logs for more detailed information.                                                                |
|          | NRF_SRV_EVENT_ENQUEUE_FAILURE       | OSCP-AUD-INTRNL-EV003 | This event is raised whenever an exception occurs while enqueueing an NRF SRV task in the event queue.                                                                                                        | This event is raised whenever an exception occurs while enqueueing an NRF service task in the event queue.                                                                                                    | Check the logs for more detailed information.                                                                |
|          | NRF_SRV_HANDLE_EVENT_FAILURE        | OSCP-AUD-INTRNL-EV004 | This event is triggered whenever there is a failure in handling the following NRF SRV events:<br><br>1. HOLD_AUDIT<br>2. START_ON_DEMAND_AUDIT<br>3. CANCELLATION                                             | This event is triggered whenever there is a failure in handling the following NRF SRV events:<br><br>1. HOLD_AUDIT<br>2. START_ON_DEMAND_AUDIT<br>3. CANCELLATION                                             | Check the logs for more detailed information.                                                                |
|          | INITIALIZATION_FAILURE              | OSCP-AUD-INTRNL-EV005 | This event is raised whenever an exception occurs while reading the property file.                                                                                                                            | This event is raised whenever an exception occurs while reading the application properties file.                                                                                                              | Check the logs for more detailed information about issues with the <code>application.properties</code> file. |
|          | DNS_SRV_NRF_TASK_RESUMPTION_FAILURE | OSCP-AUD-INTRNL-EV006 | This event is raised whenever an exception occurs while resuming an in-progress DNS SRV task.                                                                                                                 | This event is raised whenever an exception occurs while resuming an in-progress DNS SRV task.                                                                                                                 | Check the logs for more detailed information about the issue with resuming the in-progress DNS SRV task.     |
|          | PARSE_FAILURE                       | OSCP-AUD-INTRNL-EV007 | This event is triggered whenever an exception occurs while reading the following environment variables:<br><br>• AUDIT_INTERVAL<br>• ALTERNATE_RESOLUTION_AUDIT_INTERVAL<br>• INITIAL_DELAY_SECONDS_READINESS | This event is triggered whenever an exception occurs while reading the following environment variables:<br><br>• AUDIT_INTERVAL<br>• ALTERNATE_RESOLUTION_AUDIT_INTERVAL<br>• INITIAL_DELAY_SECONDS_READINESS | Check the configuration of the environment variables.                                                        |

**Table 3-26 (Cont.) Log Levels for SCPC-Audit**

| Category                 | Event                                          | EventID                           | Description                                                                                               | Cause                                                                                                     | Action                                                                                               |
|--------------------------|------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| DATA_SY<br>NC            | CONFIG_<br>DATA_PA<br>RSE_FAIL<br>URE          | OSCP-<br>AUD-<br>DATSYN-<br>EV001 | This event is raised whenever a failure occurs while parsing the received configuration data.             | This event is raised whenever a failure occurs while parsing the received configuration data.             | Check the logs for more details.                                                                     |
| SCP_HEA<br>LTH_CHE<br>CK | SCP_HC_<br>INTERNA<br>L_ERROR                  | OSCP-<br>AUD-<br>HLCAPI-<br>EV001 | This event is raised whenever an exception occurs while sending the health query request to the peer SCP. | This event is raised whenever an exception occurs while sending the health query request to the peer SCP. | Check the connection between scp-worker and scpc-audit, as well as between scp-worker and nextHopScp |
|                          | SCP_HC_<br>HANDLE_<br>RESPON<br>SE_FAILU<br>RE | OSCP-<br>AUD-<br>HLCAPI-<br>EV002 | This event is raised whenever an exception occurs while handling the health query response.               | This event is raised whenever an exception occurs while handling the health query response.               | Check the logs for more details.                                                                     |

The following table describes log levels for SCP-Load-Manager for various event types:

**Table 3-27 Log Levels for SCP-Load-Manager**

| Category                  | Event                               | EventID                           | Description                                                                                                                                            | Cause                                                                                                                                                                       | Action                                                                                                                                                           |
|---------------------------|-------------------------------------|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| READINE<br>SS_FAILU<br>RE | HEALTH_<br>CHECK_F<br>AILED         | OSCP-<br>LMG-<br>RDYNES-<br>EV001 | This event is raised when the Load-Manager readiness probe fails.                                                                                      | This event is raised when the coherence cache initialization check fails, indicating that the health check has failed.                                                      | Check the logs for more detailed information.                                                                                                                    |
| LIVENES<br>S_FAILUR<br>E  | THREAD_<br>WATCHD<br>OG_FAILU<br>RE | OSCP-<br>LMG-<br>LIVNES-<br>EV001 | This event is raised whenever any threads become stuck.                                                                                                | The thread remains stuck for a few seconds.                                                                                                                                 | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                  |
|                           | HEALTH_<br>CHECK_F<br>AILED         | OSCP-<br>LMG-<br>LIVNES-<br>EV002 | This event is raised when the Load-Manager liveness probe fails.                                                                                       | This event is raised when the coherence cache initialization check fails, indicating that the health check has failed.                                                      | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                  |
| INTERNA<br>L              | INTERNA<br>L_ERROR                  | OSCP-<br>LMG-<br>INTRNL-<br>EV001 | This event is raised whenever an internal error occurs, such as issues with monitoring Kubernetes resources, object invocation, or pegging of metrics. | This event is raised whenever an internal error occurs, such as issues with monitoring Kubernetes resources, object invocation, pegging of metrics, and similar operations. | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                  |
|                           | INITIALIZ<br>ATION_FA<br>ILURE      | OSCP-<br>LMG-<br>INTRNL-<br>EV002 | This event is raised whenever an exception occurs while reading the property file.                                                                     | This event is raised whenever an exception occurs while reading the application properties file.                                                                            | Check the logs for more detailed information about the issue in the application.properties file. For any assistance, contact <a href="#">My Oracle Support</a> . |

Table 3-27 (Cont.) Log Levels for SCP-Load-Manager

| Category  | Event                    | EventID               | Description                                                                                                                        | Cause                                                                                                                                                                                                                                                                                                                            | Action                                                                                                                                         |
|-----------|--------------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
|           | MISCELLANEOUS            | OSCP-LMG-INTRNL-EV003 | This event is raised whenever an exception occurs while creating Load Manager queue configurations.                                | This event is raised whenever an exception occurs while enqueueing a task to the event queue.                                                                                                                                                                                                                                    | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                |
|           | CONVERSION_FAILURE       | OSCP-LMG-INTRNL-EV004 | This event is raised whenever an exception occurs while monitoring the queue size of the Load Manager queue configurations.        | This event is raised whenever an exception occurs related to the queue size issue.                                                                                                                                                                                                                                               | Check the queue size and collect the logs for more information.                                                                                |
| DATA_SYNC | CONFIG_UPDATE            | OSCP-LMG-DATSYN-EV001 | This event is raised whenever SCP encounters a virtual service with empty or null hosts.                                           | This event is raised whenever SCP encounters a virtual service with empty or null hosts.                                                                                                                                                                                                                                         | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                |
|           | INVALID_DATA             | OSCP-LMG-DATSYN-EV002 | This event is raised whenever invalid configuration data is received or when required parameters are missing in the configuration. | This event is raised whenever invalid configuration data is received or when parameters are missing in the configuration.                                                                                                                                                                                                        | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                |
|           | CONFIG_DATA_PARSE        | OSCP-LMG-DATSYN-EV003 | This event is raised whenever a failure occurs while parsing the received configuration data.                                      | This event is raised whenever a failure occurs while parsing the following received configuration data: <ul style="list-style-type: none"> <li>SystemOptionsClient</li> <li>ScpFeatures</li> <li>ScpServiceConfigs</li> <li>OciConfig</li> <li>OciThresholdConfig</li> <li>EngConfig</li> <li>CongestionControlConfig</li> </ul> | Check the database records and collect the logs for more detailed information. For any assistance, contact <a href="#">My Oracle Support</a> . |
|           | SSE_FAILURE              | OSCP-LMG-DATSYN-EV004 | This event is raised when the connection to the server cannot be established during the startup of the Load Manager.               | This event is raised when the connection to the Notification service fails during application startup.                                                                                                                                                                                                                           | Check the connectivity for the Routing Option Client and collect the logs for more details.                                                    |
| CACHE     | CACHE_INITIALIZATION     | OSCP-LMG-CACHEF-EV001 | This event is raised whenever cache initialization fails.                                                                          | This event is raised whenever cache initialization fails.                                                                                                                                                                                                                                                                        | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                |
|           | CACHE_READ_WRITE_FAILURE | OSCP-LMG-CACHEF-EV002 | This event is raised whenever an exception occurs during a read or write operation on the cache data.                              | This event is raised whenever an exception occurs while reading, writing, or updating cache data.                                                                                                                                                                                                                                | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                |

**Table 3-27 (Cont.) Log Levels for SCP-Load-Manager**

| Category     | Event                          | EventID               | Description                                                                   | Cause                                                                         | Action                                                                          |
|--------------|--------------------------------|-----------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
|              | CACHE_INVALID_OR_EMPTY_DETAILS | OSCP-LMG-CACHEF-EV003 | This event is raised when incorrect or empty data is received from the cache. | This event is raised when incorrect or empty data is received from the cache. | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
| HEALTH_CHECK | THREAD_STATUS                  | OSCP-LMG-HLTCHK-EV001 | This event is triggered when an ongoing thread operation is interrupted.      | This event is triggered when an ongoing thread operation is interrupted.      | Check the logs for more detailed information.                                   |

The following table describes log levels for SCP-Cache for various event types:

**Table 3-28 Log Levels for SCP-Cache**

| Category          | Event                  | EventID               | Description                                                                                 | Cause                                                                                                                                                                                                                                                                        | Action                                                                                                                                                               |
|-------------------|------------------------|-----------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| READINESS_FAILURE | HEALTH_CHECK_FAILED    | OSCP-CCH-RDYNES-EV001 | This event is raised when the cache readiness probe fails.                                  | This event occurs when: <ul style="list-style-type: none"> <li>the Coherence cache storage is enabled and the pod count obtained is zero.</li> <li>the Coherence cache initialization fails.</li> <li>the Global Rate Limit coherence cache initialization fails.</li> </ul> | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                      |
| LIVENESS_FAILURE  | HEALTH_CHECK_FAILED    | OSCP-CCH-LIVNES-EV001 | This event is raised when the cache liveness probe fails.                                   | This event occurs due to the cache liveness and liveness recovery failure.                                                                                                                                                                                                   | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                      |
| INTERNAL          | INTERNAL_ERROR         | OSCP-CCH-INTRNL-EV001 | This event is raised when any internal error occurs in the cache.                           | This event occurs due to internal error while pegging metrics.                                                                                                                                                                                                               | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                      |
|                   | INITIALIZATION_FAILURE | OSCP-CCH-INTRNL-EV002 | This event is raised when any exception occurs while reading the application property file. | This event occurs when any exception occurs while reading the application properties file.                                                                                                                                                                                   | Check the logs for detailed information about issue in the <code>application.properties</code> file. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                   | MISCELLANEOUS          | OSCP-CCH-INTRNL-EV003 | This event is raised when any exception occurs while populating the cache queue configs.    | This event occurs when the cache queue configs are not populated.                                                                                                                                                                                                            | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                      |
|                   | CONVERSION_FAILURE     | OSCP-CCH-INTRNL-EV004 | This event is raised when any exception occurs while monitoring the cache executor queues.  | This event occurs when the cache executor queue monitoring fails.                                                                                                                                                                                                            | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                      |

Table 3-28 (Cont.) Log Levels for SCP-Cache

| Category                  | Event                                          | EventID                           | Description                                                                                                                        | Cause                                                                                                                                                                                                                                                 | Action                                                                          |
|---------------------------|------------------------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| DATA_SY<br>NC             | INVALID_<br>DATA                               | OSCP-<br>CCH-<br>DATSYN-<br>EV001 | This event is raised when any invalid SSE is received.                                                                             | This event occurs when an invalid SSE is received.                                                                                                                                                                                                    | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                           | CONFIG_<br>DATA_PA<br>RSE                      | OSCP-<br>CCH-<br>DATSYN-<br>EV002 | This event is raised when any failure occurs while parsing the received SSE data.                                                  | This event is raised when any failure occurs while parsing the received SSE data which are as follows: <ul style="list-style-type: none"> <li>• ScpFeatures</li> <li>• ScpServiceConfigs</li> <li>• SystemOptionsClient</li> </ul>                    | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
| CACHE                     | CACHE_I<br>NITIALIZA<br>TION_FAI<br>LURE       | OSCP-<br>CCH-<br>CACHEF-<br>EV001 | This event is raised when the cache initialization has failed.                                                                     | This event occurs when the Coherence cache initialization fails.                                                                                                                                                                                      | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                           | CACHE_R<br>EAD_WRI<br>TE_FAI<br>LURE           | OSCP-<br>CCH-<br>CACHEF-<br>EV002 | This event is raised when any exception occurs while performing read or write operation on the Cache data.                         | This event is raised when the following operations fail: <ul style="list-style-type: none"> <li>• Populating the local config data into the global config cache.</li> <li>• Populating the global config cache data into the local config.</li> </ul> | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                           | CACHE_E<br>VENT_HA<br>NDLING_<br>FAILURE       | OSCP-<br>CCH-<br>CACHEF-<br>EV003 | This event is raised when any exception occurs while handling local or global config cache update.                                 | This event occurs due to the failure of handling of local or global config cache update.                                                                                                                                                              | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                           | INITIALIZ<br>ATION_AL<br>READY_D<br>ONE        | OSCP-<br>CCH-<br>CACHEF-<br>EV004 | This event indicates initialization of the component is complete                                                                   | This is not an error log, so no cause is available.                                                                                                                                                                                                   | Not Applicable                                                                  |
|                           | INITIALIZ<br>ING                               | OSCP-<br>CCH-<br>CACHEF-<br>EV005 | This event indicates that the initialization of the component has started.                                                         | This is not an error log, so no cause is available.                                                                                                                                                                                                   | Not Applicable                                                                  |
| ACCESS_<br>TOKEN          | INVALID_<br>OR_EMPT<br>Y_DATA_<br>RECEIVE<br>D | OSCP-<br>CCH-<br>ACSTKN-<br>EV001 | This event is raised when an invalid or empty data is received in the cache event.                                                 | This event occurs when an invalid or empty data is received in the cache event.                                                                                                                                                                       | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
| HEALTH_<br>CHECK          | THREAD_<br>STATUS                              | OSCP-<br>CCH-<br>HLTCHK-<br>EV001 | This event is raised when any thread is stuck.                                                                                     | This event occurs when the thread is blocked in some operation for a long duration.                                                                                                                                                                   | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
| GLOBAL_<br>RATE_LIM<br>IT | INTERNA<br>L_ERROR                             | OSCP-<br>CCH-<br>GBLRLF-<br>EV001 | This event is raised when an exception occurs due to some miscellaneous reasons while performing operations for Global Rate Limit. | This event occurs when an exception occurs while Global Rate Limiting rate calculation update and reporting.                                                                                                                                          | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |



Table 3-28 (Cont.) Log Levels for SCP-Cache

| Category                          | Event                                    | EventID               | Description                                                                                                | Cause                                                                                                                                                                                                                                                                    | Action                                                                          |
|-----------------------------------|------------------------------------------|-----------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
|                                   | DATA_READ_FAILURE                        | OSCP-CCH-GBLRLF-EV002 | This event is raised when any exception occurs while performing read operation on Global Rate Limit Cache. | This event is raised when any exception occurs while performing the following operations: <ul style="list-style-type: none"> <li>Fetching remote SCP data to populate the local data structure.</li> <li>Adjusting the rate calculator data on config update.</li> </ul> | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                                   | DATA_WRITE_FAILURE                       | OSCP-CCH-GBLRLF-EV003 | This event is raised when any exception occurs while performing write operation on Global Rate Limit Data. | This event occurs when any exception occurs while populating rate limiting data in the global cache.                                                                                                                                                                     | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                                   | FEDERATION_CONFIG_CACHE_EVENT_RECEIVED   | OSCP-CCH-GBLRLF-EV004 | This event indicates the successful receipt of the config changes of federation cache event.               | This is not an error log, so no cause is available.                                                                                                                                                                                                                      | Not Applicable                                                                  |
|                                   | LOCAL_CONFIG_CACHE_EVENT_RECEIVED        | OSCP-CCH-GBLRLF-EV005 | This event indicates the successful receipt of the config changes of the local cache event.                | This is not an error log, so no cause is available.                                                                                                                                                                                                                      | Not Applicable                                                                  |
|                                   | TOKEN_CONSUMPTION_FAILURE                | OSCP-CCH-GBLRLF-EV006 | This event is raised when rate quota control fails for Global Rate Limit.                                  | This event occurs due to the rate quota control failure.                                                                                                                                                                                                                 | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                                   | HIGH_TOKEN_CONSUMPTION_DETECTED          | OSCP-CCH-GBLRLF-EV007 | This event is raised when a high rate quota control is detected for Global Rate Limit.                     | This event occurs when the rate quota control value is more than the configured rate.                                                                                                                                                                                    | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                                   | INVALID_TOKEN_CONSUMPTION_VALUE_DETECTED | OSCP-CCH-GBLRLF-EV008 | This event is raised when an invalid or negative value is detected for rate quota control.                 | This event occurs when the rate quota control value is negative.                                                                                                                                                                                                         | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                                   | INITIALIZATION_ALREADY_DONE              | OSCP-CCH-GBLRLF-EV009 | This event indicates that initialization of the component is complete.                                     | This is not an error log, so no cause is available.                                                                                                                                                                                                                      | Not Applicable                                                                  |
|                                   | INITIALIZING                             | OSCP-CCH-GBLRLF-EV010 | This event indicates that initialization of the component has started.                                     | This is not an error log, so no cause is available.                                                                                                                                                                                                                      | Not Applicable                                                                  |
| REMOTE_SCP_PARTICIPANT_MANAGEMENT | INTERNAL_ERROR                           | OSCP-CCH-RSCPPM-EV001 | This event is raised when an exception occurs while managing the remote SCP participant state.             | This event occurs when an exception occurs while invoking REST APIs to manage the remote SCP participant state.                                                                                                                                                          | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |



Table 3-28 (Cont.) Log Levels for SCP-Cache

| Category | Event                            | EventID               | Description                                                                                                                 | Cause                                                                                                                                                                                | Action                                                                                                                                                                                                                                                                                                                                             |
|----------|----------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | SCHEDULER_INITIALIZATION_FAILURE | OSCP-CCH-RSCPPM-EV002 | This event is raised when an exception occurs while starting the scheduler for the remote SCP participant state management. | This event occurs when an exception occurs while scheduling tasks for the remote SCP participant state management.                                                                   | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                                                                                                                                                                                                    |
|          | INVALID_OR_EMPTY_STATE_RESPONSE  | OSCP-CCH-RSCPPM-EV003 | This event is raised when an invalid or empty state is found for the remote SCP participants.                               | This event occurs when an invalid or empty state is found for the remote SCP participants.                                                                                           | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                                                                                                                                                                                                    |
|          | DUPLICATE_CONFIGURATION_FOUND    | OSCP-CCH-RSCPPM-EV004 | This event is raised when a duplicate configuration is found for the remote SCP participants.                               | This event occurs when a duplicate configuration is found either between two remote SCP participants or between a remote SCP participants and a local SCP participant configuration. | <ul style="list-style-type: none"> <li>• Ensure that the Global Rate Limit feature is enabled.</li> <li>• Check whether the clusterName and NFInstanceID of local SCP and remote SCPs are not duplicate.</li> <li>• Check whether the clusterName and NFInstanceID of the first remote SCP and the second remote SCP are not duplicate.</li> </ul> |
|          | ERROR_RESPONSE_RECEIVED          | OSCP-CCH-RSCPPM-EV005 | This event is raised whenever error response received while managing remote SCP participant.                                | This event occurs when a failure response is received for a REST API query of a remote SCP participant.                                                                              | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                                                                                                                                                                                                    |
|          | EMPTY_RESPONSE_DATA_RECEIVED     | OSCP-CCH-RSCPPM-EV006 | This event is raised when an empty response is received while fetching remote SCP participant state.                        | This event occurs when an empty response is received for a REST API query of a remote SCP participant state.                                                                         | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                                                                                                                                                                                                    |
|          | REPLICATE_ALL_COMMAND_FAILURE    | OSCP-CCH-RSCPPM-EV007 | This event is raised when a failure response is received while replicating cache data to remote SCP participant.            | This event occurs when a failure response is received while replicating the cache data to the remote SCP participant.                                                                | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> .                                                                                                                                                                                                                                                                    |
|          | STATE_CHANGED_SUCCESSFULLY       | OSCP-CCH-RSCPPM-EV008 | This event indicates a successful update of the state for remote SCP participant.                                           | This is not an error log, so no cause is available.                                                                                                                                  | Not Applicable                                                                                                                                                                                                                                                                                                                                     |

Table 3-28 (Cont.) Log Levels for SCP-Cache

| Category                                   | Event                                                                  | EventID                           | Description                                                                                                                                    | Cause                                                                                                                                           | Action                                                                          |
|--------------------------------------------|------------------------------------------------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
|                                            | REPLICAT<br>E_ALL_C<br>OMMAND<br>_SUCCES<br>SFULLY_S<br>UBMITTE<br>D   | OSCP-<br>CCH-<br>RSCPPM-<br>EV009 | This event indicates a successful replication of all cache data to the remote SCP participant.                                                 | This is not an error log, so no cause is available.                                                                                             | Not Applicable                                                                  |
|                                            | PARTICIP<br>ANT_REM<br>OVED_FR<br>OM_ACTI<br>VE_SET                    | OSCP-<br>CCH-<br>RSCPPM-<br>EV010 | This event is raised when a remote SCP participant's NFInstanceID is removed from the active NF instance ID set, which is already operational. | This event occurs when the remote SCP participant's state changes to unhealthy. Its NFInstanceID is removed from the active NF instance ID set. | Not Applicable                                                                  |
|                                            | PARTICIP<br>ANT_ADD<br>ED_TO_A<br>CTIVE_SE<br>T                        | OSCP-<br>CCH-<br>RSCPPM-<br>EV011 | This event is raised when the remote SCP participant's NFInstanceID is added to the active NF instance ID set.                                 | This event occurs when the remote SCP participant's state changes to healthy. Its NFInstanceID is added to the active NF instance ID set.       | Not Applicable                                                                  |
|                                            | ALREADY<br>_ACTIVE_<br>PARTICIP<br>ANT_ADD<br>ED_TO_A<br>CTIVE_SE<br>T | OSCP-<br>CCH-<br>RSCPPM-<br>EV012 | This event indicates addition of already present remote SCP participant's NFInstanceID is again added to the active NFInstanceID set.          | This event occurs when a remote SCP participant is healthy, but its NFInstanceID is not present in an active NF instance ID set.                | Not Applicable                                                                  |
|                                            | INITIALIZ<br>ATION_AL<br>READY_D<br>ONE                                | OSCP-<br>CCH-<br>RSCPPM-<br>EV013 | This event indicates that initialization of the component is complete.                                                                         | This is not an error log, so no cause is available.                                                                                             | Not Applicable                                                                  |
|                                            | INITIALIZI<br>NG                                                       | OSCP-<br>CCH-<br>RSCPPM-<br>EV014 | This event indicates that initialization of the component has started.                                                                         | This is not an error log, so no cause is available.                                                                                             | Not Applicable                                                                  |
| GLOBAL_<br>RATE_LIM<br>IT_CONFI<br>G_AUDIT | INITIALIZ<br>ATION_FA<br>ILURE                                         | OSCP-<br>CCH-<br>GBRLCA-<br>EV001 | This event is raised when an exception occurs when an initialization has failed for the Global Rate Limit Config audit.                        | This event occurs when a periodic Global Rate Limiting Config audit initialization fails.                                                       | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                                            | READ_W<br>RITE_FAIL<br>URE                                             | OSCP-<br>CCH-<br>GBRLCA-<br>EV002 | This event is raised when an exception occurs while performing a periodic Global Rate Limiting Config audit.                                   | This event occurs when a periodic Global Rate Limiting Config audit fails.                                                                      | Check the logs. For any assistance, contact <a href="#">My Oracle Support</a> . |
|                                            | INITIALIZ<br>ATION_AL<br>READY_D<br>ONE                                | OSCP-<br>CCH-<br>GBRLCA-<br>EV003 | This event indicates that initialization of the component is complete.                                                                         | This is not an error log, so no cause is available.                                                                                             | Not Applicable                                                                  |

Table 3-28 (Cont.) Log Levels for SCP-Cache

| Category | Event        | EventID               | Description                                                            | Cause                                               | Action         |
|----------|--------------|-----------------------|------------------------------------------------------------------------|-----------------------------------------------------|----------------|
|          | INITIALIZING | OSCP-CCH-GBRLCA-EV004 | This event indicates that initialization of the component has started. | This is not an error log, so no cause is available. | Not Applicable |

### Managing Verbose Logging

#### Enable

This feature is enabled automatically at the time of SCP deployment.

#### Configure

There is no specific configuration required for this feature.

Support for the Trace log level has been introduced for the SCPC-Notification, SCPC-Audit, SCP-Load-Manager, and SCP-Cache microservices. For more information, see the [Configuring Global Options](#) section and the "Configuring Dynamic Logging" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

There is no specific metrics and alerts required for this feature.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:


1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.22 Support for OAuth2.0

Access tokens are credentials used by consumer NFs to access protected resources provided by producer NFs. These credentials are issued by NRF. These tokens represent specific scope and duration of access. SCP supports OAuth2.0 (Open Authorization) access tokens in 5G indirect communication models such as Model C and Model D.

In the 5G SBI Model D indirect communication (with delegated discovery) mode, SCP obtains access tokens from NRF for 5G SBI message requests except notification or callback messages. SCP uses the acquired access tokens to forward SBI message requests to the selected producer NFs.

The following call flow represents how SCP obtains access tokens from NRF:

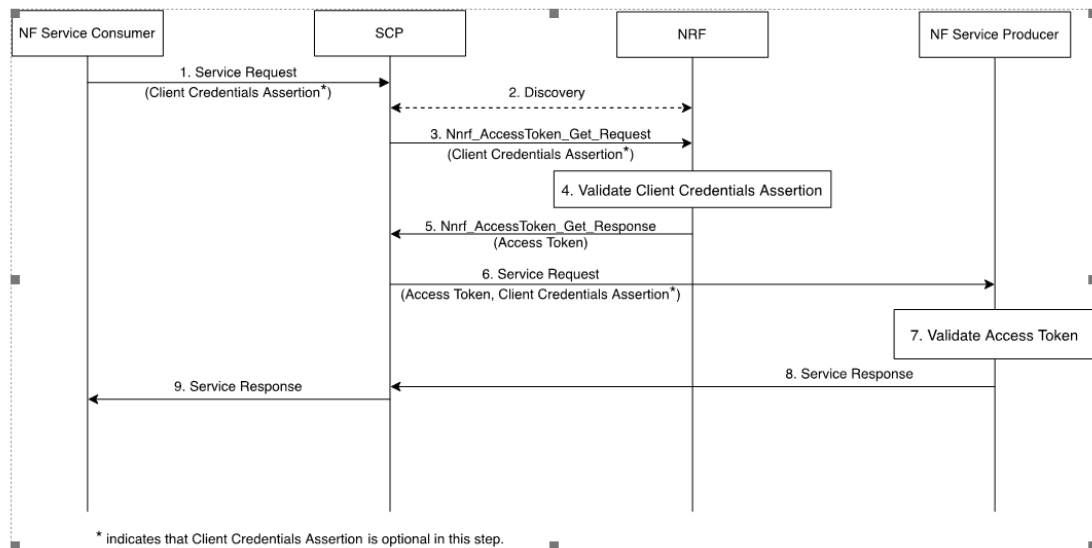
**Figure 3-5 SCP Obtains Access Tokens from NRF**

The above mentioned call flow describes the process to use the Discovery parameter to send a request to NRF for obtaining the access token:

1. NF Service Consumer sends a service request to SCP.
2. If SCP does not get an access token in the service request, it uses the Discovery parameter to send the access token request to NRF.
3. SCP sends Nnrf\_AccessToken\_Get\_Request to NRF.
4. NRF validates the access token request using Client Credential Assertion (CCA).
5. NRF sends Nnrf\_AccessToken\_Get\_Response to SCP.
6. SCP forwards the service request, along with CCA and access token, to NF Service Producer.
7. NF Service Producer validates the access token.
8. NF Service Producer sends the service response to SCP.
9. SCP relays the service response to NF Service Consumer.

In the 5G SBI Model C indirect communication (without delegated discovery) mode, consumer NFs obtain access tokens from NRF except notification or callback messages. SCP uses the access tokens received from consumer NFs and forward SBI message requests to the selected producer NFs.

The following call flow represents how NF Service Consumer obtains access tokens from NRF:

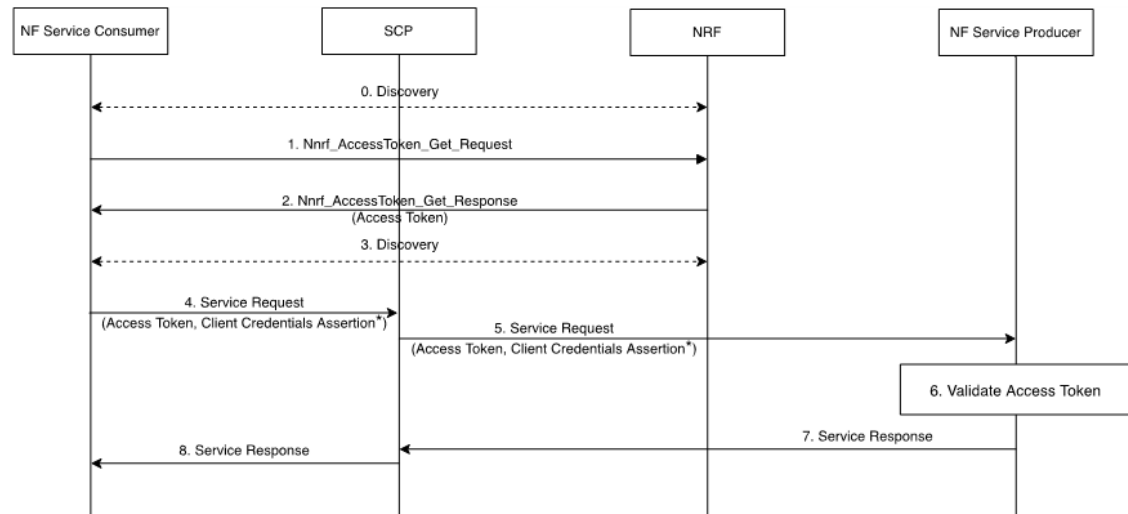**Figure 3-6 NF Consumer Obtains Access Tokens from NRF**

\* Indicates that Client Credentials Assertion is optional in this step.

The above mentioned call flow describes the process that NF Service Consumer uses to obtain access token from NRF and how SCP uses this access token to forward the service request.

1. When there is no mutual authentication between NF Service Consumer and NRF, NF Service Consumer sends Nnrf\_AccessToken\_Get\_Request to NRF.
2. NRF sends Nnrf\_AccessToken\_Get\_Response to NF Service Consumer.
3. NF Service Consumer sends Discovery service requests to NRF.
4. After receiving the discovery response with NF profiles, NF Service Consumer sends the service request to SCP.
5. SCP uses the access token received from NF Service Consumer and forwards the service request, along with CCA and access token, to NF Service Producer.
6. NF Service Producer validates the access token.
7. NF Service Producer sends the service response to SCP.
8. SCP relays the service response to NF Service Consumer.

#### **Note**

SCP supports 5G SBI Client Credentials Assertion (CCA) custom header for Model C and Model D indirect communication routing. It is an optional header that can be sent by consumer NFs, along with the service request for enabling consumer NFs authentication. For more information about CCA header, see [Support for the Client Credentials Assertion Header](#).

This feature enables SCP to perform the following tasks:

- SCP determines the status of OAuth2 support of producer NFs deployed in the network using the following:
  - Learnt 5G NF service topology from NRF

- NF discovery response during delegated service request
- Configurations at SCP
- In Model D indirect communication, SCP is responsible for access token lifecycle (initiate, maintain, and delete). SCP caches the access tokens and reuses them during initial, subsequent, or alternate routing.
- SCP validates access tokens as per the configuration.
- SCP returns the access token received from NRF to consumer NFs using the "3gpp-Sbi-Access-Token" header.
- SCP determines service level scope information in the access token from the "3gpp-Sbi-Access-Scope" header
- SCP regulates and avoids duplicate access token requests for the same consumer NF and producer NF pair.
- SCP supports OAuth2.0 in inter-SCP scenarios.
- SCP proactively attempts to refresh the access tokens when required.
- SCP supports NF type and NF instance type of access tokens.

SCP has introduced the SCP-nrfProxy-Oauth microservice to manage requests initiated to NRF for its nnrf-oauth2 service that considers various parameters as body and CCA header to provide an authentication token as response to the consumer NF. This microservice interacts with SCP-Worker when it receives request from SCP-Worker. When SCP-Worker initiates the access token request to NRF, Oauth2.0 service sends a request to SCP-Worker with NRF details in the routing binding header. Coherence cache is integrated with this service where the values of tokens are stored based on the cache configuration at SCP. To avoid duplicate requests to NRF, an internal cache is also maintained. This service is capable of handling various states of access tokens received, such as expiration, and acts accordingly.

## Managing Support for OAuth2.0

### Enable

By default, this feature is disabled. To enable this feature, do the following tasks:

1. Set the nrfProxyOauthService Helm parameter to true in the `ocscp_values.yaml` file.
2. Set the `oauth2_support` option to true as described in [Configuring SCP Features](#).

### Configure

You can configure this feature using Helm, REST APIs, and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Features](#) and [OAuth2.0 Configurations](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features", "Configuring NRF", "Configuring OAuth2.0 Access Token Granularity", and "Configuring OAuth2.0 Local PLMN Required" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **Configure using Helm:** For information about configuring the SCP-nrfProxy-Oauth microservice, see "SCP-nrfProxy-oauth Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

### Observe

The following metrics are added in the [Metrics](#) section:

- ocsdp\_oauth\_access\_token\_cache\_match\_total
- ocsdp\_worker\_access\_token\_forwarded\_in\_tx\_res\_total
- ocsdp\_worker\_access\_token\_forwarded\_in\_tx\_req\_total
- ocsdp\_worker\_access\_token\_cache\_match\_total
- ocsdp\_nrf\_oauth\_error\_counts\_total
- ocsdp\_oauth\_access\_token\_tx\_rsp\_total
- ocsdp\_oauth\_access\_token\_rx\_res\_total
- ocsdp\_oauth\_access\_token\_tx\_req\_total
- ocsdp\_oauth\_access\_token\_rx\_req\_total
- ocsdp\_worker\_access\_token\_rx\_res\_total
- ocsdp\_worker\_access\_token\_tx\_req\_total

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.23 Pod Overload Control

SCP processes 5G Service Based Interface (SBI) messages using its microservices. To protect scp-worker pods from the overload, SCP has introduced the Pod Overload Control feature.

This feature throttles only ingress 5G SBI message requests based on:

- CPU utilization of the scp-worker microservice pods.
- Pending Transactions for which responses from producer NFs are awaited by SCP.

SCP provides the following pod overload configurations for scp-worker:

- **Pod Overload Action Policy:** To configure action to be taken by scp-worker pods for CPU overload.
- **Pod Overload Control Policy:** To configure CPU and pending transactions onset threshold, abatement threshold, and abatement time for scp-worker.
- **Pod Overload Discard Policy:** To configure the percentage of messages to be discarded based on the discardPercentage parameter or discard messages based on the sbiMsgPriorityDiscardFrom parameter.

For more information about the aforementioned configurations, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

When CPU utilization or pending transactions of the scp-worker pod exceeds the configured threshold level, SCP responds based on the configured overload Action Policy as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Message Priority

SCP assigns and updates the "3gpp-Sbi-Message-Priority" header to prioritize ingress 5G SBI messages during the overload control task. For more information about message priority, see [Message Priority Assignment and Override](#).

### Managing Pod Overload Control

#### Enable

This feature is enabled automatically in SCP at the time of deployment.

#### Configure

You can configure the Pod Overload Control feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about 5G SBI message priority and pod overload policies configurations, see [Configuring Pod Overload Control Policies](#) and [Configuring SBI Message Priority](#).
- **Configure using REST API:** For information about 5G SBI message priority and pod overload policies configurations, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

For information about metrics, see [Metrics](#).

The following alerts are added in the [Alerts](#) section:

- [SCPCPUUsageFileReadFailed](#)
- [SCPCGroupVersionDetectionFailed](#)

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.24 Host Preference for Egress Message Requests

Although Fully Qualified Domain Name (FQDN) is present in the ingress message requests, SCP uses IP as the host in the egress message request if IP is present in the learned Network Function (NF) profile of the producer NF.

Using the Host Preference for Egress Message Requests feature, SCP can determine the host type to be included in the egress messages. SCP uses one of the host types such as FQDN or IP, in the egress message request.

The host type in the egress message request is determined by the following:

- 3gpp-Sbi-Target-apiRoot header



- hostPreference of egress\_host\_preference as described in the "Configuring SCP Features" section of *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*
- Learned NF profile from NRF

If the 3gpp-Sbi-Target-apiRoot header is present in the ingress message request, the host type is determined by the `hostPreference.request.apiRootHdrPresent` REST API parameter. If this parameter value is set to `passThrough`, which is the default value, SCP uses the same type of host in the egress message request as received through the ingress message request. For more information about the `hostPreference.request.apiRootHdrPresent` REST API parameter, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

If the 3gpp-Sbi-Target-Apiroot header is absent in the ingress message request, SCP uses the `hostPreference.request.apiRootHdrNotPresent` REST API configuration to determine the host type. By default, SCP uses IP as the host type.

In case of alternate routing, SCP determines the host type of another equivalent producer NF by using the same method as used for the target producer NF.

If the selected host type is FQDN, SCP provides the `fqdnResolution.fqdn` REST API parameter to choose whether to resolve the FQDN in the egress message request with the IPs (from IP Endpoints) present in learned NF profiles of the target producer NF or trigger a Domain Name System (DNS) query.

SCP tries to get the same host type as configured in the `hostPreference` REST API parameter, however, if the corresponding information such as FQDN or IP, is unavailable, then SCP uses other available information for routing.

## Managing Host Preference for Egress Message Requests

### Enable

By default, this feature is disabled. To enable this feature, you must complete the configuration as described in the following configuration section.

### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Features](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_fqdn_resolution_total`
- `ocscp_worker_interplmn_fqdn_resolution_total`
- `ocscp_worker_http_req_host_type_total`

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.25 Enhanced 5G SBI Message Failure Handling

SCP adds server header to all SCP generated error responses as defined in 3GPP TS 29.500. SCP forwards error responses received from producer NFs to consumer NFs without modifying the server header. In case of alternate routing, SCP forwards the last received error response to the consumer NF.

In SCP 1.15.0, the 5G SBI Message Failure Handling functionality is enhanced to enable SCP to send information of all the routing attempts made on producer NFs by SCP. The server header format is enhanced to include all the routing information while forwarding error responses with server header to consumer NFs.

The server header format includes information of all the attempted producer NFs in the reverse order of attempts made. For example: If NF1 and NF2 are attempted in that order, the server header formats are:

- In forwarded responses: "Server: <NF2 Type>-<NF2 instance id> <NF1 Type>-<NF1 instance id>"
- In self-generated responses: "Server: SCP-<scp-fqdn> <NF2 Type>-<NF2 instance id> <NF1 Type>-<NF1 instance id>"

In SCP 23.1.0, when SCP does not receive a server header in an error response from a producer NF, SCP adds a server header with its FQDN while forwarding the response to the consumer NF.

SCP generates error responses in the following scenarios:

### ① Note

The server header, using SCP's own FQDN, will apply to all error responses generated by SCP. This includes errors caused by discards due to ingress or egress rate limiting, pod overload control, destination exhausted, no host, and so on. For more information about error codes generated by SCP, see [Error Codes Generated by SCP](#).

- Connection issue with producer NF: When the producer NF is unhealthy or SCP is unable to establish connection with the producer NF.
- Timeout at SCP: When the producer NF fails to reply to SCP within the specified time as configured in the `responseTimeout` REST API parameter or if the configured `totalTransactionLifetime` expires.
- Service unavailable: When the connection is unavailable between SCP and producer NF.

### ① Note

If an IP address is provided in the SCP FQDN deployment field, the same is mentioned in the server header introduced by SCP for the above mentioned scenarios.

SCP adds a server header with its FQDN in the error responses received from the service mesh sidecar. The server header format is: "Server": "SCP-<SCP FQDN>".

SCP forwards the server header received in the error response from the producer NF as it is to the consumer NF.

When SCP receives an error response from sidecar or service mesh, then SCP adds a server header with its FQDN and relays them to the consumer NF. SCP detects an error generated by sidecar or service mesh failure when the received response has server header matching one of the configured server header strings in the `sideCarProxyServerHeader` REST API parameter. For example, "envoy", "istio-envoy", and custom string configured in SCP, and the status code in the received error response matches the status code configured in the `sideCarProxyStatusCode` REST API parameter.

SCP appends its FQDN in the server header if it has received a response from at least one producer NF (also known as the last error response), and SCP could not try other NFs due to the following:

- Connection issue, unknown host exception or unknown error
- Service mesh reported errors
- Timeout at SCP
- Received error response from the producer NF without server header

The error response for the above scenarios has the server header as follows: "Server": "SCP-<SCP Fqdn> NFTYPE-<NfInstanceId>".

In SCP 23.2.0, the 5G SBI Message Failure Handling functionality is enhanced. SCP forwards the last or latest error response received from producer NFs to consumer NFs, and server header content is populated with the details of the producer NF from which the error response is received.

SCP does not append SCP FQDN in returned server header to downstream if it has received an error response from at least one producer and SCP could not try other producer NFs due to the following:

- Connection issue, unknown host exception or unknown error
- Service mesh reported errors
- Timeout at SCP
- Received error response from the producer NF without server header

The error response for the above scenarios has the server header as follows: "Server": "NFTYPE-<NfInstanceId>".

The following table describes differences between the server header behavior in SCP 23.1.0 and SCP 23.2.0:

**Table 3-29 Implemented Behavior**

| Scenario                                                                                                                                                                | Server Header in SCP 23.1.0                     | Server Header in SCP 23.2.0      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|----------------------------------|
| When SCP sends a message request to UDM1, UDM1 sends an error response with a server header. Then, SCP performs alternate routing on UDM2, and a timeout occurs at SCP. | "Server": "SCP-<scp-fqdn> UDM-udm1-instance-id" | "Server": "UDM-udm1-instance-id" |

Table 3-29 (Cont.) Implemented Behavior

| Scenario                                                                                                                                                                                                                                                                                                                     | Server Header in SCP 23.1.0                     | Server Header in SCP 23.2.0      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|----------------------------------|
| When SCP sends a message request to UDM1, SCP receives an error response from the service mesh or sidecar. Then, SCP performs alternate routing on UDM2 and receives an error response without a server header, and when SCP performs another alternate routing on UDM3, it receives an error response with a server header. | "Server": "SCP-<scp-fqdn> UDM-udm3-instance-id" | "Server": "UDM-udm3-instance-id" |

The following table describes the server header behavior in different error scenarios between SCP and producer NFs.

**Note**

In all the scenarios, SCP attempts to establish connections with producer NFs (UDM1, UDM2, and UDM3) as mentioned in the scenarios.

Example Scenario 19: UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue, and the pod is down.

In the above mentioned scenario and as specified in the note, SCP attempts to establish connection with UDM1 first followed by UDM2, and then UDM3.

Table 3-30 Server Header Behavior

| Serial No. | Scenario                                                            | Server Header Behavior                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1          | UDM1 and UDM2 services are unavailable.                             | <ul style="list-style-type: none"> <li>Default behavior when addServerHeaderInProducerResponse is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>— false: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                                         |
| 2          | Timeout has occurred at UDM1 and UDM2.                              | <ul style="list-style-type: none"> <li>Default behavior when addServerHeaderInProducerResponse is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>— false: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "SCP-&lt;SCP FQDN&gt; UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> |
| 3          | UDM1 and UDM2 have generated error responses without server header. | <ul style="list-style-type: none"> <li>Default behavior when addServerHeaderInProducerResponse is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm2-instanceid"</li> <li>— false: SCP won't add any server header</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                         |

Table 3-30 (Cont.) Server Header Behavior

| Serial No. | Scenario                                                                                                | Server Header Behavior                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4          | UDM1 and UDM2 have generated error responses with server header.                                        | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm2-instanceid"</li> <li>— false: "Server" : "UDM-udm2-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> </ul> |
| 5          | UDM1 sends an error response without server header and timeout has occurred at UDM2.                    | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm1-instanceid"</li> <li>— false: SCP won't add any server header</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP_FQDN&gt;"</li> </ul>                     |
| 6          | UDM1 sends an error response with server header and timeout has occurred at UDM2.                       | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm1-instanceid"</li> <li>— false: "Server" : "UDM-udm1-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm1-instanceid"</li> </ul>                     |
| 7          | UDM1 and UDM2 send error responses without server header.                                               | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm2-instanceid"</li> <li>— false: SCP won't add any server header</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP_FQDN&gt;"</li> </ul>                     |
| 8          | UDM1 and UDM2 send error responses with server header.                                                  | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm2-instanceid"</li> <li>— false: "Server" : "UDM-udm2-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> </ul> |
| 9          | UDM1 sends an error response with server header and UDM2 sends an error response without server header. | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm2-instanceid"</li> <li>— false: SCP won't add any server header</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm1-instanceid"</li> </ul>                      |

Table 3-30 (Cont.) Server Header Behavior

| Serial No. | Scenario                                                                                                       | Server Header Behavior                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------|----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10         | UDM1 sends an error response without server header.                                                            | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm1-instanceid"</li> <li>— false: SCP won't add any server header</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                         |
| 11         | UDM1 sends an error response with server header.                                                               | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm1-instanceid"</li> <li>— false: "Server" : "UDM-udm1-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm1-instanceid"</li> </ul>                         |
| 12         | UDM1 sends an error response with server header and UDM2 SCP couldn't do Alternate route due to some issue.    | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm1-instanceid"</li> <li>— false: "Server" : "UDM-udm1-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm1-instanceid"</li> </ul>                         |
| 13         | UDM1 sends an error response without server header and UDM2 SCP couldn't do Alternate route due to some issue. | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm1-instanceid"</li> <li>— false: SCP won't add any server header</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                         |
| 14         | SCP is unable to connect with UDM1 and UDM2 due to connection issue.                                           | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>— false: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                     |
| 15         | Timeout has occurred at UDM1.                                                                                  | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>— false: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "SCP-&lt;SCP FQDN&gt; UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> |

Table 3-30 (Cont.) Server Header Behavior

| Serial No. | Scenario                                                                                                                             | Server Header Behavior                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 16         | UDM1, UDM2, and UDM3 send error responses without server header.                                                                     | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm3-instanceid"</li> <li>— false: SCP won't add any server header</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm3-instanceid UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                                         |
| 17         | UDM1, UDM2, and UDM3 send error responses with server header.                                                                        | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm3-instanceid"</li> <li>— false: "Server" : "UDM-udm3-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm3-instanceid UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm3-instanceid UDM-udm2-instanceid UDM-udm1-instanceid"</li> </ul> |
| 18         | UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response without server header.                      | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm2-instanceid"</li> <li>— false: SCP won't add any server header</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                                                                                 |
| 19         | UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response with server header.                         | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm2-instanceid"</li> <li>— false: "Server" : "UDM-udm2-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm2-instanceid"</li> </ul>                                                                                 |
| 20         | UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.    | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm1-instanceid"</li> <li>— false: "Server" : "UDM-udm1-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm1-instanceid"</li> </ul>                                                             |
| 21         | UDM1 sends an error response without server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down. | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to:               <ul style="list-style-type: none"> <li>— true: "Server" : "UDM-udm1-instanceid"</li> <li>— false: SCP won't add any server header</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                                                             |



Table 3-30 (Cont.) Server Header Behavior

| Serial No. | Scenario                                                                                                                                                                                                                    | Server Header Behavior                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 22         | Loop detection (508) occurred.                                                                                                                                                                                              | <ul style="list-style-type: none"> <li>Default behavior when addServerHeaderInProducerResponse is set to:               <ul style="list-style-type: none"> <li>– true: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>– false: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                                                                                                 |
| 23         | UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.                                                                                           | <ul style="list-style-type: none"> <li>Default behavior when addServerHeaderInProducerResponse is set to:               <ul style="list-style-type: none"> <li>– true: "Server" : "UDM-udm1-instanceid"</li> <li>– false: "Server" : "UDM-udm1-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm1-instanceid"</li> </ul>                                                                                 |
| 24         | UDM1 Sidecar returns special server headers.                                                                                                                                                                                | <ul style="list-style-type: none"> <li>Default behavior when addServerHeaderInProducerResponse is set to:               <ul style="list-style-type: none"> <li>– true: SCP forwards the special server headers as it is to the Consumer.</li> <li>– false: SCP forwards the special server headers as it is to the Consumer.</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): SCP forwards the special server headers as it is to the Consumer.</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> |
| 25         | <b>Ingress Rate Limiting:</b> SCP Generates an error message because the ingress rate was more than the allowed rate configured for the consumer as specified by the rules configured in the Ingress Rate Limiter REST API. | <ul style="list-style-type: none"> <li>Default behavior when addServerHeaderInProducerResponse is set to:               <ul style="list-style-type: none"> <li>– true: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>– false: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                                                                                                 |
| 26         | <b>Pod Overload:</b> SCP-worker pod is overloaded due to CPU overload or pending transactions.                                                                                                                              | <ul style="list-style-type: none"> <li>Default behavior when addServerHeaderInProducerResponse is set to:               <ul style="list-style-type: none"> <li>– true: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>– false: "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt;"</li> </ul>                                                                                                 |
| 27         | <b>OCI:</b> UDM1 SCP doesn't attempt on UDM1 due to 100% OCI UDM2 SCP receives error response with server header.                                                                                                           | <ul style="list-style-type: none"> <li>Default behavior when addServerHeaderInProducerResponse is set to:               <ul style="list-style-type: none"> <li>– true: "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>– false: "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"</li> </ul>                     |



Table 3-30 (Cont.) Server Header Behavior

| Serial No. | Scenario                                                                                                              | Server Header Behavior                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 28         | <b>OCI:</b><br>UDM1 SCP doesn't attempt on UDM1 due to 100% OCI.<br>UDM2 SCP doesn't attempt on UDM2 due to 100% OCI. | <ul style="list-style-type: none"> <li>Default behavior when <code>addServerHeaderInProducerResponse</code> is set to: <ul style="list-style-type: none"> <li>— true: "Server" : "SCP-&lt;SCP FQDN&gt; UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>— false: "Server" : "SCP-&lt;SCP FQDN&gt; UDM-udm2-instanceid UDM-udm1-instanceid"</li> </ul> </li> <li>Behavior in SCP 23.1.0 (Enhancement 1): "Server" : "SCP-&lt;SCP FQDN&gt; UDM-udm2-instanceid UDM-udm1-instanceid"</li> <li>Behavior in SCP 23.2.0 (Enhancement 2): "Server" : "SCP-&lt;SCP FQDN&gt; UDM-udm2-instanceid UDM-udm1-instanceid"</li> </ul> |

## Managing Enhanced 5G SBI Message Failure Handling

### Enable

This default behavior, which is specified in 3GPP TS 29.500, of this feature is enabled automatically in SCP at the time of deployment. To enable the enhanced server header behavior introduced in SCP 1.15.0, set **Enable Enhance Server Header Behavior** to true. To enable the enhanced server header behavior introduced in SCP 23.1.0 and later, set **Enable Enhance Server Header Behavior V2** to true. For more information, see [Configuring Server Header](#).

#### Note

The enhanced server header behavior of SCP 1.15.0 and SCP 23.1.0 are mutually exclusive.

### Configure

You can configure the Enhanced 5G SBI Message Failure Handling feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about server header parameters configuration, see [Configuring Server Header](#).
- **Configure using REST API:** For information about server header configurations, see "Configuring Server Header" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

Updated the `ocscp_metric_sidecarproxy_failures_total` metric with the `ocscp_server_header` dimension in the [Metrics](#) section.

Added the [SCPServiceMeshFailure](#) alert in the [Alerts](#) section.

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.26 Extension of HTTP Status Code List for Rerouting

SCP can reroute a request when a producer responds with an error code. Prior to this release, rerouting took place based on the configurable response codes. However, the list of configurable error codes was limited to a smaller set of enumerations (ENUMs), such as GATEWAY\_ERROR, few other status codes and ENUMs.

With this enhancement, SCP now supports rerouting a request based on an extended list of configurable HTTP Status codes. The user-provided configurable list of error codes serves as the basis for rerouting. A wider set of numerical response codes is supported with the introduction of the new attribute "reRouteConditionList," which replaced the old attribute "reRouteOnResponseCodeList" in the Routing Options REST API. When a received error code matches a status code in the configurable list, the SCP reroutes the request based on the configured alternate routing mechanism.

### Managing Configurable HTTP Status Codes for Rerouting

#### Enable

You can enable this feature using REST API by setting the reRouteConditionList routing option parameter. For more information about this parameter, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Configure

You can configure the HTTP Status Codes for Rerouting functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure HTTP Status Codes for Rerouting, see [Configuring Routing Options](#).
- **Configure using REST API:** For information about how to configure HTTP Status Codes for Rerouting, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

There is no specific metrics and alerts required for the Extension of HTTP Status Code List for Rerouting functionality.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.27 Load Balancing

The 5G core network is a service-based architecture that does not lend itself to an efficient load balancing of provider NFs. By introducing Service Communication Proxy (SCP) in the midst, the load balancing across available NFs can be significantly improved. SCP has a complete view of all the messages arriving for a given NF type and supports traffic distribution patterns, such as round-robin, based on its capacity and availability by enabling uniform load balancing strategy across the network.

SCP supports Load Balancing Algorithm: Priority and Capacity. Load balancing across the equivalent NF or NF Services is based on the priority and capacity.

### Managing Load Balancing

#### Enable

The Load Balancing feature is a core functionality of SCP.

You can enable this feature using REST API by setting the routePolicy routing option parameter to Load\_Balance. For more information about this parameter, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Note

This feature is enabled automatically if you are deploying SCP with Release 16 of Model C. For more information about Model C, see [Support for Model C Indirect 5G SBI Communication](#).

#### Configure

You can configure the Load Balancing functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure load balancing, see [Configuring Routing Options](#).
- **Configure using REST API:** For information about how to configure load balancing, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

There is no specific metrics and alerts required for the Load Balancing functionality.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.28 5G SBI Message Mediation Support

SCP supports Mediation as an independent service to modify 5G Service Based Interface (SBI) message content, which includes HTTP2 header values and JSON message body, based on the user-defined mediation rule sets.

SCP uses microservice, scp-mediation, that applies user configured message mediation policy rules to ingress 5G SBI messages to perform message mediation transformation. The scp-worker microservice applies mediation invocation filter criteria according to the mediation trigger point configuration and forwards 5G SBI messages to the scp-mediation microservice.

The following parameters are configured to forward SBI messages to Mediation from the trigger points:

- **nfType:** It routes all message requests for this nfType to the scp-mediation microservice.
- **serviceName:** It routes all message requests for this serviceName to the scp-mediation microservice.
- **httpMethods:** It routes all messages of a particular HTTP method type, which corresponds to the methods specified in this list, to the scp-mediation microservice.
- **triggerPoints:** It contains the list of trigger points that must be enabled to forward message requests from SCP to the scp-mediation microservice from the enabled trigger point. It has four values, requestIngress, requestEgress, responseIngress, and responseEgress.
- **match:** This block specifies the criteria required to match HTTP headers or JSON body or the both to route to the scp-mediation microservice.

### Note

- Mediation is supported only in Release 16 SCP deployment.
- Mediation does not support multipart messages.

### Pseudo Headers

Pseudo headers in service requests can be used in mediation rules to meet the condition, modify, or assign values to the user-defined variables.

SCP-Worker sends pseudo header values in the x-original-\* headers, which can be used at mediation to modify the corresponding pseudo headers. If SCP detects any change in any of the x-original-\* header value that SCP-Worker has passed to the mediation service, SCP-Worker will use the modified value of that x-original-\* header to forward the message to peers.

The following sample represents pseudo header values of "x-original-path", "x-original-method", "x-scp-authority", "x-message-type", and "x-original-status" that can be used in the mediation rule to assign the values to the user-defined variables:

```
rule "RuleS1"
  agenda-group "groupId1-requestIngress"
  when
    req : Request(headers.get("3gpp-sbi-routing-binding") == "bl=nf-
    set;nfset=set1.chfset.5gc.mnc012.mcc345")
  then
```

```

    req.variable.add("x-original-path", req.headers.get("x-original-path"))
    req.variable.add("x-original-scheme", req.headers.get("x-original-scheme"))
    req.variable.add("x-original-method", req.headers.get("x-original-method"))
    req.variable.add("x-scp-authority", req.headers.has("x-scp-authority"))
    req.variable.add("x-message-type", "response")
    req.variable.add("authorityValue", "http://
chf2svc.default.svc.cluster.local:8080/USEast/nchf-convergedcharging/v1/
chargingdata/"))

    req.variable.add("supi", req.body.get("$.subscriberIdentifier.supi").toString()
)
    req.variable.add("fqdn", "http://chf1svc.default.svc.cluster.local:8080/
USEast")
end

```

The following sample represents pseudo header values that can be updated and set based on the user-defined variables or any other conditions in the mediation rule:

```

rule "RuleS10_1"
  agenda-group "groupId1-requestEgress"
  when
    req : Request(variable.get("x-original-path") == "/USEast/nchf-
convergedcharging/v1/chargingdata/"
    && variable.get("x-original-scheme") == "http"
    && variable.get("x-original-method") == "POST"
    && variable.get("x-scp-authority") == true
    && variable.get("supi") == "imsi-1234567814"
    && variable.get("authorityValue") == "http://
chf2svc.default.svc.cluster.local:8080/USEast/nchf-convergedcharging/v1/
chargingdata/"
  then
    req.setUri(req.variable.get("uri").toString())
    req.headers.put("x-original-scheme", "https")
  end

rule "PseudoHeader3"
  agenda-group "groupId3-responseIngress"
  when
    res : Response(headers.get("x-original-status") == "201")
  then
    res.headers.put("x-original-status", "204")
  end

```

The following table describes different pseudo headers:

**Table 3-31 Pseudo Headers**

| Header Name     | Description                                                                                                                                                                                                                           |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| x-original-path | Carries the original path that is received in the request, that is, value of ":path" header of original message.<br>x-original-path - ":path" header of original message.<br>Example: /USEast/nchf-convergedcharging/v1/chargingdata/ |

Table 3-31 (Cont.) Pseudo Headers

| Header Name                                      | Description                                                                                                                                                                                                                                     |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| x-original-scheme                                | Indicates the scheme of the received service request, that is, value of “:scheme” header of original message.<br>x-original-scheme - “:scheme” header of original message.<br>Example: http or https                                            |
| x-original-method                                | Indicates the type of method for the received service request, that is, value of “:method” header of original message.<br>Example: POST, GET, PUT                                                                                               |
| x-message-type                                   | Indicates the value of message type, which can be “request” or “response”. By default, if this header is absent, it will be treated as a “request”.<br>x-message-type - Value can be “request” or “response”<br>Example: response or request    |
| x-original-status                                | Indicates the response status in terms of status code, that is, value of “:status” header of original message.<br>x-original-status - “:status” header of original message.<br>Example: response status code ex:201, 200                        |
| setUri or “:authority” or “x-original-authority” | Indicates the correct target NF service in the PLMN, that is, value of “:authority” header of original message.<br>x-original-authority- “:authority” header of original message.<br>Example: :authority: udm1svc.scpsvc.svc.cluster.local:8080 |

## Managing Mediation Support Feature

### Enable

To enable 5G SBI Message Mediation Support feature, set the `mediationService` parameter to `true` in the `global parameters` section of the `custom-values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

#### Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version.

### Configure

You can configure the Mediation features using REST API and the CNC Console:

- Configure using CNC Console:** You can enable the 5G SBI Message Mediation Support feature by setting `mediation` to `true`. For more information, see [Configuring SCP Features](#). To configure trigger points, see [Configuring Mediation](#) and to configure mediation routing options, see [Configuring Routing Options for Mediation](#).  
To configure the mediation rules, see [Configuring Mediation Rules](#).  
To configure mediation at the log level, see [Configuring Mediation Log Levels](#) section.
- Configure using REST API:** For information about configuring trigger points, see "Configuring Mediation Trigger Point", and for configuring mediation routing options, see "Configuring App Routing Options".

To configure mediation rules using the REST API, see "Configuring Mediation Rules".

To configure mediation at the log level using the REST API, see "Configuring Mediation Rules" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.


In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.28.1 Mediation Rules Configuration

Mediation rules stored in the database can be retrieved, new rules can be added, and existing rules can be modified using the CCNC GUI and RESTful API. In addition, the storage capacity has improved.

**Figure 3-7 Rule Status Flow**

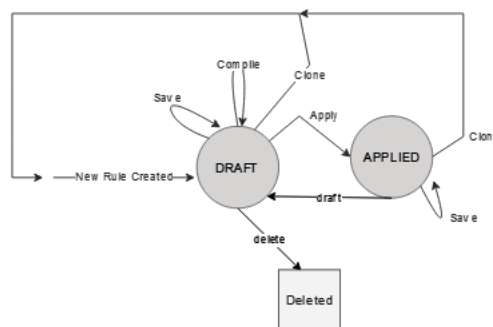

The following table lists the state of rules and its description

**Table 3-32 Types of State**

| State   | Description                                                                                                                                                                                           |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Clone   | To create a new rule, the values of the rule already created and stored in the database are used. This newly created rule has a name followed by a term draft. A new name must be provided as a rule. |
| Compile | This state precompiles, takes the rule source, and builds an executable rule base.                                                                                                                    |
| Draft   | This state moves a rule from APPLIED status to DRAFT status.                                                                                                                                          |
| Apply   | This state moves a rule from DRAFT status to APPLY status.                                                                                                                                            |
| Save    | This state saves the changes in database.                                                                                                                                                             |

The table lists the modifications allowed to be configured in rule status:

**Table 3-33 Rule Status**

| Field Name     | DRAFT status | Applied status |
|----------------|--------------|----------------|
| Rule Name      | Not Allowed  | Not Allowed    |
| Format         | Not Allowed  | Not Allowed    |
| Status         | Not Allowed  | Not Allowed    |
| Mediation Mode | Allowed      | Allowed        |
| Code           | Allowed      | Not Allowed    |
| State          | Allowed      | Allowed        |

**Note**

The Rule Name must be unique. The status of a rule can be DRAFT or APPLIED. Only DRAFT status can be deleted, edited, or viewed.

This section describes APIs that are used to define Mediation rules.

**Header Rule APIs**

The following are the header APIs used to create header rules supported in Mediation.

**Table 3-34 Header Rule APIs**

| API Name                        | Return Type | Description                                                                                                                                                                                                                                 |
|---------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| get(String key)                 | String      | Returns the header value for the key specified.<br>Example:<br>Request(headers.get("x-number"))                                                                                                                                             |
| has(String key)                 | Boolean     | Returns true or false depending on whether the header specified by the key attribute is present or absent.<br>Example:<br>Request(headers.has("3gpp-Sbi-Producer-Id"))                                                                      |
| has(String key, String value)   | Boolean     | Returns true or false depending on whether the header specified by the key and value attribute is present.<br>Example:<br>Request(headers.has("3gpp-Sbi-Producer-Id","nfinst=1faf1bbc-6e4a-3994-a507-a14ef8e1bc23"))                        |
| put( String key, String value)  | Boolean     | Creates the header with the specified key value pair if the key is absent. If the key is present, it updates the value of the header with the specified value.<br>Example:<br>req.headers.put("x-original-authority", "10.172.19.110:8080") |
| add( String key, String value); | Boolean     | Adds the header with the provided key and value if it does not find the key.<br>Example:<br>req.headers.add("Content-type", "application/json")                                                                                             |
| set( String key, String value); | Boolean     | Updates the header with the value if the provided key is found.<br>Example:<br>req.headers.set("3gpp-Sbi-Producer-Id","nfinst=1faf1bbc-6e4a-3994-a507-a14ef8e1bc25")                                                                        |



**Table 3-34 (Cont.) Header Rule APIs**

| API Name                                            | Return Type | Description                                                                                                                                                                                |
|-----------------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| set( String key, String oldValue, String newValue); | Boolean     | Updates the header with a newVa lue if the existing value of the header matches with the value specified by the o ldVa lue attribute.<br>Example:<br>req.headers.set("x-number", "2", "3") |
| del(String key)                                     | Boolean     | Removes the header specified by the key attribute.<br>Example:<br>req.headers.del("3gpp-Sbi-Message-Priority")                                                                             |
| del(String key, String value)                       | Boolean     | Removes the header if it matches with the provided key and va lue.<br>Example:<br>req.headers.del("x-forwarded-NF","NRF")                                                                  |
| count();                                            | Integer     | Returns the total count of all the headers.<br>Example:<br>Request(headers.count())                                                                                                        |
| count(String key);                                  | Integer     | Returns the total count of headers with the key.<br>Example:<br>Request(headers.count("Accept"))                                                                                           |
| count(String key, String value)                     | Integer     | Returns the total count of headers with the key and va lue.<br>Example:<br>Request(headers.count("Accept","application/json"))                                                             |

**APIs for Modifying Request Body**

The following table describes the rule APIs to update and delete HTTP message body that are supported in mediation:

**Note**

The paths in all the parameters must be in the JSONPa th format.

**Table 3-35 APIs for Modifying Request Body**

| API Name                       | Return Type  | Description                                                                                                         |
|--------------------------------|--------------|---------------------------------------------------------------------------------------------------------------------|
| get(String path)               | Object       | Returns the value present at the specified pa th.<br>Example:<br>body.get("\$.serviceName")                         |
| getAll(String path)            | List<Object> | Returns the list of objects present at the specified pa th.<br>Example:<br>body.getAll("\$.serviceName")            |
| has(String path);              | boolean      | Checks whether the key is present at the pa th or not.<br>Example:<br>body.has("\$.serviceName")                    |
| has(String path, Object value) | boolean      | Checks whether the key has the value present at the pa th or not.<br>Example:<br>body.has("\$.serviceName","value") |

**Table 3-35 (Cont.) APIs for Modifying Request Body**

| API Name                                             | Return Type | Description                                                                                                                                                                                                                                                                     |
|------------------------------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| absPath(String arrayPath, String elem, Object value) | Object      | Returns the whole path from the head to the element if the value is present.<br>Example:<br>req.body.absPath("\$.payload", "iePath", "/a")                                                                                                                                      |
| indexOf(String arrayPath, String elem, Object value) | Integer     | Returns the index of the value in that JSONArray.<br>Example:<br>req.body.indexOf("\$.dataToIntegrityProtectBlock.payload", "value", 100)                                                                                                                                       |
| put(String path, String key, T value)                | boolean     | Adds the body with the provided key and value at the path if the key is absent. Otherwise, update the body with the value at the path.<br>Example:<br>req.body.put("\$", "key", "value")<br><b>Note:</b> It is recommended to use the PUT method while trying to add a new key. |
| add(String path, T value)                            | boolean     | Adds the key embedded in the path with the provided value if the element is absent.<br>Example:<br>req.body.add("\$.ipEndpoints", "value")<br><b>Note:</b> When adding a new key, the PUT method is always preferred over the ADD method.                                       |
| set(String path, T value)                            | boolean     | Updates the key embedded in the path with the provided value if the element is present.<br>Example:<br>rsp.body.set("\$.ipEndpoints", "value")                                                                                                                                  |
| del(String path, T value)                            | boolean     | Removes the element at that path with the value present. Not supported.<br>Example:<br>req.body.del("\$.path", "value")                                                                                                                                                         |
| del(String path)                                     | boolean     | Removes the element at that path.<br>Example:<br>req.body.del("\$.path")                                                                                                                                                                                                        |

**HTTP Message Common APIs**

The following are the common HTTP message APIs supported by both request and response body.

**Table 3-36 HTTP Message Common APIs**

| API Name            | Return Type | Description                                                                                  |
|---------------------|-------------|----------------------------------------------------------------------------------------------|
| getUri()            | String      | Returns the URI of the request.<br>Example:<br>req.getUri()                                  |
| setUri(String URI)  | void        | Sets the URI in the body of the request.<br>Example:<br>req.setUri("http://oracle.com")      |
| getHttpStatusCode() | Integer     | Returns the StatusCode from the body of the response.<br>Example:<br>rsp.getHttpStatusCode() |

**Table 3-36 (Cont.) HTTP Message Common APIs**

| API Name                                  | Return Type | Description                                                                                         |
|-------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------|
| setHttpStatusCode(Integer httpStatusCode) | void        | Sets the StatusCode in the body of the response.<br>Example:<br>rsp.setHttpStatusCode(201)          |
| getRejectMessage()                        | String      | Returns the Reject Message from the body of the response.<br>Example:<br>rsp.getRejectMessage()     |
| setRejectMessage(String rejectMessage)    | void        | Sets the Reject Message in the body of the response.<br>Example:<br>rsp.setRejectMessage("Message") |

The following User Defined Variable APIs are supported in mediation:

**Table 3-37 User Defined Variable APIs**

| API Name                                                                                                                                                     | Return Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| get(String key)                                                                                                                                              | Object      | Returns the value of a user-defined variable associated with the specified key.<br>Example: req.variable.get("key") or rsp.variable.get("key")                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| getAll()                                                                                                                                                     | String      | Returns all user-defined variables and their values that have been configured through mediation rules.<br>Example:<br>req.variable.getAll() or rsp.variable.getAll()                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| has(String key)                                                                                                                                              | Boolean     | Returns true or false based on the presence of the user-defined variable.<br>Example: req.variable.has("key") or rsp.variable.has("key")                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <ul style="list-style-type: none"> <li>has(String key, Long value)</li> <li>has(String key, Boolean value)</li> <li>has(String key, String value)</li> </ul> | Boolean     | Returns true or false depending on whether the user-defined variable is present with the specified value.<br>Example: req.variable.has("key", 1243456789) or<br>rsp.variable.has("key", 1243456789)<br>req.variable.has("key", true) or rsp.variable.has("key", true)<br>req.variable.has("key", "value") or<br>rsp.variable.has("key", "value")<br>req.variable.has("key", "{\"test-key\": \"test-value\", \"test-key2\": {\"test-key2-key\": \"test-val\"}}") or<br>rsp.variable.has("key", "{\"test-key\": \"test-value\", \"test-key2\": {\"test-key2-key\": \"test-val\"}}")                                 |
| <ul style="list-style-type: none"> <li>put(String key, long value)</li> <li>put(String key, Boolean value)</li> <li>put(String key, String value)</li> </ul> | Boolean     | Adds the user-defined variable with the specified key and value if it doesn't exist, or updates the variable's value if the key is found.<br>Example: req.variable.put("key", 1243456789) or<br>rsp.variable.put("key", 1243456789)<br>req.variable.put("key", true) or rsp.variable.put("key", true)<br>req.variable.put("key", "value") or<br>rsp.variable.put("key", "value")<br>req.variable.put("key", "{\"test-key\": \"test-value\", \"test-key2\": {\"test-key2-key\": \"test-val\"}}") or<br>rsp.variable.put("key", "{\"test-key\": \"test-value\", \"test-key2\": {\"test-key2-key\": \"test-val\"}}") |

Table 3-37 (Cont.) User Defined Variable APIs

| API Name                                                                                                                                                                                                                | Return Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>add(String key, Long value)</li> <li>add(String key, Boolean value)</li> <li>add(String key, String value)</li> </ul>                                                            | Boolean     | <p>Adds the user-defined variable with the specified key and value if it does not already exist.</p> <p>Example: req.variable.add("key", 1243456789) or<br/>         rsp.variable.add("key", 1243456789)</p> <p>req.variable.add("key", true) or rsp.variable.add("key", true)</p> <p>req.variable.add("key", "value") or<br/>         rsp.variable.add("key", "value")</p> <p>req.variable.add("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}") or<br/>         rsp.variable.add("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}")</p>                                                                                                                                                                                                                                                                                              |
| <ul style="list-style-type: none"> <li>set(String key, Long value)</li> <li>set(String key, Boolean value)</li> <li>set(String key, String value)</li> </ul>                                                            | Boolean     | <p>Updates the user-defined variable with the specified value if the given key is found.</p> <p>Example: req.variable.set("key", 1243456789) or<br/>         rsp.variable.set("key", 1243456789)</p> <p>req.variable.set("key", true) or rsp.variable.set("key", true)</p> <p>req.variable.set("key", "value") or<br/>         rsp.variable.set("key", "value")</p> <p>req.variable.set("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}") or<br/>         rsp.variable.set("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}")</p>                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>set(String key, Long oldValue, Long newValue)</li> <li>set(String key, Boolean oldValue, Boolean newValue)</li> <li>set(String key, String oldValue, String newValue)</li> </ul> | Boolean     | <p>Updates the user-defined variable with a new value if the existing value matches the specified old value.</p> <p>Example: req.variable.set("header", 1243456789, 124345678999) or<br/>         rsp.variable.set("header", 1243456789, 124345678999)</p> <p>req.variable.set("header", true, false) or<br/>         rsp.variable.set("header", true, false)</p> <p>req.variable.set("header", " old value", "new value") or<br/>         rsp.variable.set("header", " old value", "new value")</p> <p>req.variable.set("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}", "{\"test-key1\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}") or<br/>         rsp.variable.set("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}", "{\"test-key1\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}")</p> |
| del(String key)                                                                                                                                                                                                         | Boolean     | <p>Deletes the user-defined variable if it matches the specified key.</p> <p>Example: req.variable.del("header") or<br/>         rsp.variable.del("header")</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Table 3-37 (Cont.) User Defined Variable APIs**

| API Name                                                                                                                                                     | Return Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>del(String key, Long value)</li> <li>del(String key, Boolean value)</li> <li>del(String key, String value)</li> </ul> | Boolean     | <p>Deletes the user-defined variable if it matches both the specified key and value.<br/>Example: req.variable.del("key",1243456789) or<br/>rsp.variable.del("key",1243456789)<br/>req.variable.del("key",true) or rsp.variable.del("key",true)<br/>req.variable.del("header","value") or<br/>rsp.variable.del("header","value")<br/>req.variable.del("key","{\"test-key\":\"test-value\",\"test-key2\":{\"test-key2-key\":\"test-val\"}}") or<br/>rsp.variable.del("key","{\"test-key\":\"test-value\",\"test-key2\":{\"test-key2-key\":\"test-val\"}}")</p> |
| count();                                                                                                                                                     | Integer     | <p>Returns the total count of all user-defined variables.<br/>Example: req.variable.count() or rsp.variable.count()</p>                                                                                                                                                                                                                                                                                                                                                                                                                                       |

**Mediation Service Rule Configuration with Scenarios**

This section captures various types of mediation rule configuration with scenarios.

**Use Case 1**

To update the headers for specific requests.

**Scenario**

The mediation rule is configured when headers get ("pduSessionId"="23476") and add the header (X-Service-Name=PCF) value to the request.

**Mediation Rule**

```
rule "Rule2_PCF"
  agenda-group "CUSTOM_ORACLE_SCP-requestEgress"
  when
    req : Request(headers.get("pduSessionId") == "23476")
  then
    req.headers.put("x-service-name", "PCF")
  end
```

**Use Case 2**

To add, update, or delete any attribute in the JSON payload in the request or response.

**Scenario**

Mediation rule is configured as when incoming response payload got servingNetworkName="5G:nmc310.mcc310.3gppnetwork.org" then delete the "traceData" attribute and add TP="ResIngressAusf" in json payload.

**Mediation Rule**

```
rule "Rule7_AUSF"
  agenda-group "CUSTOM_ORACLE_SCP-responseIngress"
  when
    res : Response(body.get("$.servingNetworkName")=="5G:nmc310.mcc
310.3gppnetwork.org")
  then
```

```

        res.body.del("$.traceData")
        res.body.put("$", "TP", "ResIngressAusf")
    end

```

### Use Case 3

To update URI components such as apiRoot, apiName, apiVersion, and apiSpecificResourceUriPart in the request or response.

#### Scenario

Mediation rule is configured as when request payload got "3gpp-sbi-target-apiroot"="http://ausf1svc.default.svc.cluster.local:8080/USEast" then update the URI to "http://ausf2svc.scpsvc.svc.cluster.local:8080/USEast/nausf-auth/v1/ue-authentications".

#### Mediation Rule

```

rule "Rule5_AUSF"
    agenda-group "CUSTOM_ORACLE_SCP-requestEgress"
when
    req : Request(headers.get("3gpp-sbi-target-apiroot") == "http://
ausf1svc.default.svc.cluster.local:8080/USEast")
then
    req.setUri("http://ausf2svc.default.svc.cluster.local:8080/USEast/nausf-
auth/v1/ue-authentications")
end

```

### Use Case 4

To update the authority in apiRoot coming in the request or response.

#### Scenario

Mediation rule is configured as when request header got 3gpp-Sbi-Target-apiRoot="http://pcf1svc.default.svc.cluster.local:8080/USEast" update the authority to pcf3 from pcf1.

#### Mediation Rule

```

rule "Rule6_PCF"
    agenda-group "CUSTOM_ORACLE_SCP-requestEgress"
when
    req : Request(headers.get("3gpp-sbi-target-apiroot") == "http://
pcf1svc.scpsvc.svc.cluster.local:8080/USEast")
then
    req.setUri("http://pcf3svc.scpsvc.svc.cluster.local:8080/USEast/npcf-
smpolicycontrol/v1/sm-policies")
end

```

### Use Case 5

To add any vendor-specific header.

#### Scenario

Mediation rule is configured as when response payload got "sliceInfo"=="adfg127" then add the vendor-specific header ("\$, "x-service-name", "PCF").

**Mediation Rule**

```
rule "Rule2_PCF"
    agenda-group "CUSTOM_ORACLE_SCP_requestEgress"
when
    req : Request(body.get("$.sliceInfo") == "adfg127")
then
    req.headers.put("x-service-name", "PCF")
end
```

**Use Case 6**

To convert the response status code that it received to any specific status code.

**Scenario**

The mediation rule is configured; if mediation receives an HTTP response code of 401, it should update the response code to 402.

**Mediation Rule**

```
rule "status rule_responseEgress"
    agenda-group "CUSTOM_ORACLE_SCP_responseEgress"
when
    rsp : Response(getHttpStatusCode() == "402")
then
    rsp.setHttpStatusCode(401)
end
```

**Use Case 7**

To update authority in apiRoot based on a JSON-nested object from the body.

**Scenario**

The mediation rule is configured to segregate NF Producer based on MSISDN.

To retrieve the nested parameter, servedGPSI, from the below structure:

```
"pduSessionChargingInformation":{
  "chargingId":747941933,
  "pduSessionInformation":{},
  "uetimeZone":"+00:00+0",
  "userInformation":{
    "servedGPSI":"msisdn-447432982860",
    "servedPEI":"imeisv-3528878115855501",
    "unauthenticatedFlag":false
  },
  "
```

**Mediation Rule**

```
rule "G_N40_odd"
    agenda-group "G_N40_odd-requestIngress"
when
    req :
```

```

Request(body.get("$.pDUSessionChargingInformation.userInformation.servedGPSI"
)=="msisdn-447432982860")
then
    req.headers.put("3gpp-sbi-target-apiroot",http://10.251.132.183:8080)
end

```

### 3.28.1.1 Mediation Rule Migration Process


Previously, rules were used from the Kubernetes config map. Currently, the rules present in the config map are migrated to the database table (mediation\_rule table).

This section describes the procedure to execute the migration of rules from the existing config-map based implementation into the new REST API.

The following are the config-map related to mediation:

- `ocscp-nf-mediation-config-boot`: It contains all the configuration related to the spring boot application and is used in both modes (test and active).
- `ocscp-nf-mediation-config-active`: It contains rule entries and is only applicable to active mode.
- `ocscp-nf-mediation-config-test`: It contains rule entries and is only applicable to test mode.
- The following image illustrates the migration process:

**Figure 3-8 Migration to Database table**

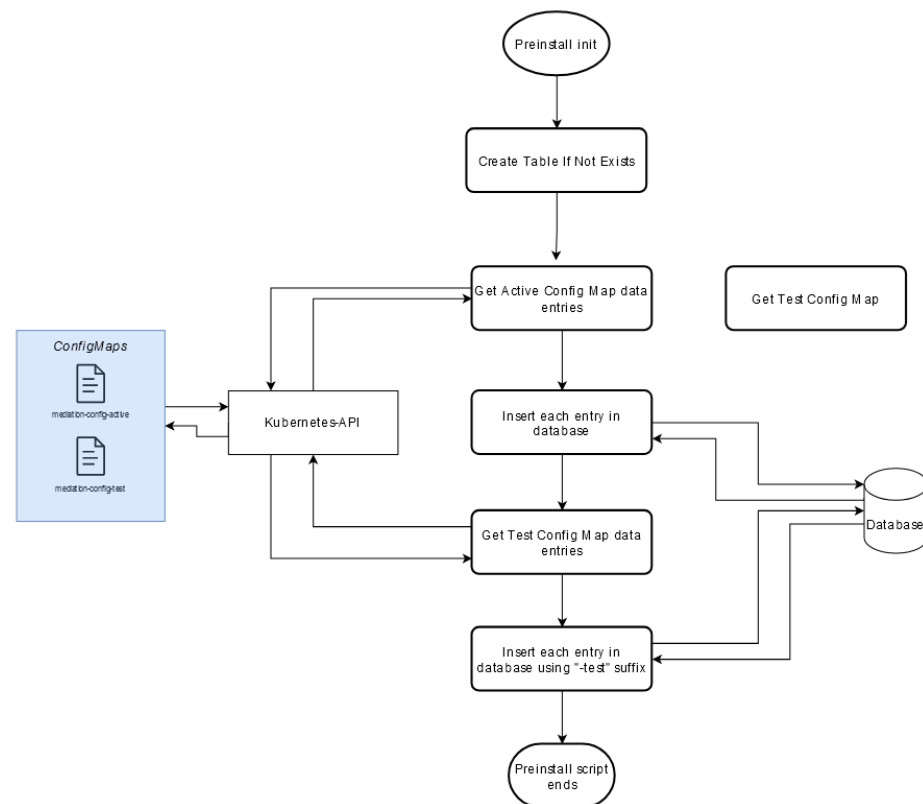



**Note**

To successfully migrate to database table, all the rules in the Config map must be valid.

**Generate Rule Entries**

1. Read ocscp-nf-mediation-config-active configuration map.
2. For each entry in key-value map structure, create entry in Rule table with the following:
  - a. Rule.name: entry.key removing .drl extension
  - b. Rule.code: entry.value
  - c. Rule.status: APPLIED
  - d. Rule.mode: MEDIATION\_ACTIVE
3. Read ocscp-nf-mediation-config-test configuration map.
4. Create entry in Rule table with the following:
  - a. Rule.name: entry.key removing .drl extension adding "-test" as suffix to avoid name conflicts with active configmap
  - b. Rule.code: entry.value
  - c. Rule.status: APPLIED
  - d. Rule.mode: MEDIATION\_TEST

**Migration of Rule Entries**

The following examples details about the rule migrated from configmap to database table.

Example of ocscp-nf-mediation-config-active configuration map:

```
apiVersion: v1
kind: ConfigMap
metadata:
  creationTimestamp: "2022-11-11T13:15:14Z"
  name: nf-mediation-nf-mediation-config-active
  namespace: scpsvc
data:
  rule_1.drl: |
    package com.oracle.cgbu.ocmediation.nfmediation;

    import com.oracle.cgbu.ocmediation.nfruleengine.NFDroolsRuleEngine;
    import com.oracle.cgbu.ocmediation.factdetails.Request;
    import com.oracle.cgbu.ocmediation.factdetails.Response;
    import java.util.Map;
    import java.util.HashMap;

    dialect "mvel"

    rule "Rule_show_add_header"
    when
      req : Request(headers.has("header-test") == true)
    then
```

```

        req.headers.add("3gpp-Sbi-Message-Priority","10")
        req.headers.del("x-test-req-header1")
    end

    rule "Rule_show_delete_header"
    when
        req : Request(headers.has("header-test2") == true)
    then
        req.headers.del("header-test2")
    end

rule_2.drl: |
package com.oracle.cgbu.ocmediation.nfmediation;

import com.oracle.cgbu.ocmediation.nfruleengine.NFDroolsRuleEngine;
import com.oracle.cgbu.ocmediation.factdetails.Request;
import com.oracle.cgbu.ocmediation.factdetails.Response;
import java.util.Map;
import java.util.HashMap;

dialect "mvel"

rule "Rule_show_add_headerv2"
when
    req : Request(headers.has("another-header") == true)
then
    req.headers.add("new-header2","10")
end

```

Example of ocscp-nf-mediation-config-test configuration map:

```

apiVersion: v1
kind: ConfigMap
metadata:
  creationTimestamp: "2022-11-11T13:15:14Z"
  name: nf-mediation-nf-mediation-config-test
  namespace: scpsvc
data:
  rule_1.drl: |
    package com.oracle.cgbu.ocmediation.nfmediation;

    import com.oracle.cgbu.ocmediation.nfruleengine.NFDroolsRuleEngine;
    import com.oracle.cgbu.ocmediation.factdetails.Request;
    import com.oracle.cgbu.ocmediation.factdetails.Response;
    import java.util.Map;
    import java.util.HashMap;

    dialect "mvel"

    rule "Rule_show_add_header"
    when
        req : Request(headers.has("header-test") == true)
    then
        req.headers.add("3gpp-Sbi-Message-Priority","10")
        req.headers.del("x-test-req-header1")
    end

```

```

end

rule "Rule_show_delete_header"
when
    req : Request(headers.has("header-test2") == true)
then
    req.headers.del("header-test2")
end

```

In this examples, the ocscp-nf-mediation-config-active configuration map has two different entries (rule\_1.drl and rule\_2.drl) and rule\_1.drl has the definition of two different rules, Rule\_show\_add\_header and Rule\_show\_delete\_header, it is important to consider that rule\_1 will have a single rule entry in the database containing all the code for its two rules.

In this case, the database entries are as follows:

**Table 3-38 Database Entries**

| Name   | Status  | Mode             | Code                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------|---------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| rule_1 | APPLIED | MEDIATION_ACTIVE | <pre> package com.oracle.cgbu.ocmediation.nfmediation;  import com.oracle.cgbu.ocmediation.nfruleengine.NFDrools RuleEngine; import com.oracle.cgbu.ocmediation.factdetails.Request; import com.oracle.cgbu.ocmediation.factdetails.Response; import java.util.Map; import java.util.HashMap;  dialect "mvel"  rule "Rule_show_add_header" when     req : Request(headers.has("header-test") == true) then     req.headers.add("3gpp-Sbi-Message- Priority","10")     req.headers.del("x-test-req-header1") end  rule "Rule_show_delete_header" when     req : Request(headers.has("header-test2") == true) then     req.headers.del("header-test2") end </pre> |

Table 3-38 (Cont.) Database Entries

| Name   | Status  | Mode                 | Code                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------|---------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| rule_2 | APPLIED | MEDIATION_ACTIVATIVE | <pre> package com.oracle.cgbu.ocmediation.nfmediation;  import com.oracle.cgbu.ocmediation.nfruleengine.NFDrools RuleEngine; import com.oracle.cgbu.ocmediation.factdetails.Request; import com.oracle.cgbu.ocmediation.factdetails.Response; import java.util.Map; import java.util.HashMap;  dialect "mvel"  rule "Rule_show_add_headerv2" when     req : Request(headers.has("another-header") == true) then     req.headers.add("new-header2", "10") end </pre> |

Table 3-38 (Cont.) Database Entries

| Name        | Status  | Mode           | Code                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------|---------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| rule_1-test | APPLIED | MEDIATION_TEST | <pre> package com.oracle.cgbu.ocmediation.nfmediation;  import com.oracle.cgbu.ocmediation.nfruleengine.NFDrools RuleEngine; import com.oracle.cgbu.ocmediation.factdetails.Request; import com.oracle.cgbu.ocmediation.factdetails.Response; import java.util.Map; import java.util.HashMap;  dialect "mvel"  rule "Rule_show_add_header" when     req : Request(headers.has("header-test") == true) then     req.headers.add("3gpp-Sbi-Message- Priority","10")     req.headers.del("x-test-req-header1") end  rule "Rule_show_delete_header" when     req : Request(headers.has("header-test2") == true) then     req.headers.del("header-test2") end </pre> |

## 3.28.2 Mediation Log Level Configuration

The Mediation Log Level Configuration feature allows users to fetch and update the log level settings of the mediation service. Through the REST API, users can control the mediation log level, enhancing the operational efficiency of the mediation service.

### Managing Log Level Configuration

#### Enable

To enable 5G SBI Message Mediation Support feature, set the `mediationService` parameter to `true` in the `global parameters` section of the `custom-values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

**Note**

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version.

**Configure**

You can configure the Mediation features using REST API and the CNC Console.

- **Configure using CNC Console:** You can enable the 5G SBI Message Mediation Support feature by setting mediation to true. For more information, see [Configuring SCP Features](#). To configure mediation at the log level, see [Configuring Mediation Log Levels](#) section.
- **Configure using REST API:** To configure mediation at the log level using the REST API, see "Configuring Mediation Rules" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

**Maintain**

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.28.3 Mediation Support for User Defined Variables in Rules and Trigger Points

Mediation Support for User Defined Variables in Rules and Trigger Points functionality in SCP allows users to store information in a mediation trigger point and then pass that information to another mediation trigger point for the same transaction. This is particularly useful when dealing with complex message manipulations, such as modifying a response based on the content of the initial request.

This feature supports the storage of various types of information, including header values, values from JSON payloads, modified values based on mediation rules, or custom values derived from specific conditions. Users can store information with a custom name using User Defined Variables (UDVs) REST API, which can then be read or written within the mediation rules. Additionally, these variables and their values will be transmitted to the SCP-Worker as a mediation response header, with the header name med-user-defined-var-list.

For example:

```
med-user-defined-var-list=[{"serviceName\":\"npcf-smpolicycontrol\", \"targetNfType\":\"PCF\", \"requesterNfType\":\"AMF\", \"supi\":\"imsi-1234567814\", \"pduSession\":23476}]
```

Use cases examples:

- **Update Discovery Response Based on Requester NF Type:** The discovery response does not contain details about the requester NF, making it challenging to mediate the response based on the requester NF. This feature allows users to store the requester NF information

at the RxRequest trigger point and use the stored requester NF type information to mediate the discovery response at the RxResponse trigger point.

- **Update Response Based on Derived Information from the Request:** Users can define mediation rules to identify and store the user category as prepaid or postpaid at the RxRequest trigger point. The stored user category information can then be used to mediate the response at the RxResponse trigger point.

### Usage of User Defined Variables in Mediation Rules

The user-defined variables can be used in both the conditions and actions of mediation rules, as well as in the matching configurations based on mediation trigger points at SCP to qualify messages for mediation. The stored information about UDVs at the mediation trigger points will not be included in the communication to the SCP peer.

### Managing User Defined Variables in Mediation Rules and Trigger Points

#### Enable

To enable 5G SBI Message Mediation Support feature, set the `mediation Service` parameter to true in the global parameters section of the `custom_values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

#### Configure

You can configure the Mediation features using REST API and the CNC Console.

- **Configure using CNC Console:** You can enable the Mediation Support for User Defined Variables in Rules and Trigger Points feature by setting `mediation` and `User Defined Variable` to true. For more information, see [Configuring Mediation](#). To configure Mediation Support for User Defined Variables in Rules and Trigger Points, see [Configuring Mediation Support for User Defined Variables](#) section. For instructions on setting up trigger points, see [Configuring Mediation Trigger Point](#). To set up mediation rules, see [Configuring Mediation Rules](#).
- **Configure using REST API:** For information on configuring mediation, see the "Configuring SCP Features" section. For instructions on setting up trigger points, see "Configuring Mediation Trigger Points". To configure mediation routing options, see "Configuring App Routing Options". To set up mediation rules using the REST API, see "Configuring Mediation Rules". For details on configuring mediation at the log level through the REST API, see "Configuring Mediation Rules" in the *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

- Added the following metrics in the [Metrics](#) section:
  - `ocscp_worker_med_udv_read_failure_total`
  - `ocscp_worker_med_udv_usage_count_limit_exceeded_total`
- Added the following metrics in the [Mediation Metrics](#) section:
  - `ocscp_med_udv_storage_failure_total`
  - `ocscp_med_udv_read_failure_total`
  - `ocscp_med_udv_used_total`
  - `ocscp_med_udv_size_mismatch_total`
  - `ocscp_med_udv_type_mismatch_total`

- `ocscp_med_udv_not_configured_total`
- `ocscp_med_udvs_max_size_limit_exceeded_total`
- Added the following alert in the [Mediation Alerts](#) section:
  - [NFMediationUserDefinedVariablesMaxSizeLimitExceeded](#)

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.29 5G SBI Message Routing

SCP provides 5G Service Based Interface (SBI) message routing control and brings resiliency to the network. It relieves consumer NFs from remembering and interpreting complex routing rules associated with the next hop selection. Concurrently, it makes rerouting decisions based on the load conditions and health status of producer NFs within the configured time period.

SCP acts as a proxy and forwards and routes any 5G ingress service request to the host (5G NF) present in the request's URI.

For Release 16, SCP supports:

- 5G SBI Model C indirect communication
- 5G SBI Model D indirect communication
- Learns 5G NF topology from NRF
- Static configuration of 5G NF topology
- Load Control based on the Load Control Information Header and so on.
- IPv4 IP family
- Every NF deployed in the network is expected to register with NRF as SCP learns the deployed network's NF topology from NRF.

### Alternate Routing

SCP performs alternate routing by forwarding the message request to the next available producer NF if the target producer NF:

- is unavailable.
- does not respond due to a timeout.
- responds with an error.

An alternate routing attempt is considered when a connection is established and a message request is sent out. If SCP fails to establish a connection, it is not counted as an attempt.

After receiving a message request, if SCP does not find any routing rules, SCP uses a default routing rule to route the request directly to the target producer NF. In such scenarios, alternate routing and load balancing functionalities are not applicable.



SCP provides circuit breaking functionality by rejecting message requests for failed or degraded NFs when alternate routing is unavailable. This process prevents consumer NFs from using their resources because they wait for responses from producer NFs. SCP attempts to get a response from producer NFs on behalf of consumer NFs by allowing the service user to focus on the application.

SCP also reroutes message requests with one of the configured HTTP status codes. For more information about the status codes, see "HTTP Status Code and Applicability for Rerouting" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

When one of the following nexthop SCP or SEPP routing failure conditions occurs, SCP performs alternative routing:

- Error received from nextHop SCP or SEPP
- Request timeout at SCP
- Transport error

### Types of Routing Options Supported by SCP

The types of routing options are:

- Pod Level Routing: Controls routing across the pods of selected NF
- Service Level Routing: Controls routing of selected NF services

### InterSCP Routing

SCP supports Inter-SCP routing for scenarios where routing across regions is required.

The network can be divided into different geographical regions, with each region deploying redundant NF instances. Each of these regions can be deployed with their own georedundant NRFs. There are scenarios when traffic routing is required across the regions.

In such cases, SCP has to learn the network topology by interacting with NRFs in different regions. SCP also discovers other SCPs in the network. To enable routing to producer NF instances in other regions, the consumer SCP in a region is aware of the producer SCP in other regions.

SCP defines its serving Locality in the servingScope parameter in its profile registered with NRF and learns the NF topology from NRF. SCP learns other SCPs from NRF in the same way as it learns from any other producer.

When consumer NF's SCP receives a request, it finds the locality of the selected producer NF instance.

If the producer NF locality is not served by the consumer SCP, the consumer NF's SCP finds the SCP serving the producer NF's locality and routes the request to that SCP. The producer's SCP forwards the request to the producer NF within its served locality.

If the consumer SCP serves the producer locality, it is routed by the consumer SCP. If not, the request is forwarded to the producer SCP serving the NF locality for routing in its served region.

If the selected producer's locality is not served by the consumer SCP but by multiple SCPs with the same priority, the consumer SCP load balances requests to the producer SCPs with the same priority for the selected producer, using weights based on the capacity of those producer SCPs.

## "User-Agent" Header Formats

SCP adds the "User-Agent" header to SCP originated message requests to NRF.

SCP uses the `userAgentHeaderFormat` REST API parameter to define the format of the "User-Agent" header that is added in the SCP originated message requests towards NRF. SCP supports the following formats of the "User-Agent" header:

- NFTYPE-NFINSTANCEID FQDN
- NFTYPE-NFINSTANCEID-FQDN
- NFTYPE-FQDN NFINSTANCEID
- NFTYPE-FQDN-NFINSTANCEID
- NFTYPE-NFINSTANCEID
- NFTYPE-FQDN
- NFTYPE
- NFTYPE-UNIQUEID

This enhancement enables SCP to support above mentioned "User-Agent" formats and includes consumer NFs identity as dimensions in SCP metrics, alerts, and logs. The following dimension are introduced as part of this enhancement to filter SCP metrics based on the consumer NF information: `ocscp_consumer_host`, `ocscp_consumer_nf_instance_id`, and `ocscp_consumer_nf_type`.

SCP uses the `scp_user_agent_info` REST API parameter to enable or disable the addition of the "User-Agent" header in the SCP originated messages towards NRF. For more information about the `scp_user_agent_info` parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

## Loop Detection

The loop detection feature is used to identify the loops in the 5G control plane network. SCP detects loops using the `via` header in the incoming request. SCP looks for its own FQDN presence in `via` header. If such a case occurs, this implies that the same SCP is invoked twice in the same request sequence, which means there is a loop. Hence, SCP rejects such a request. The loop detection feature is enabled by default.

## Managing 5G SBI Message Routing

### Enable

SCP determines 5G NF topology information from NRF. You can enable the 5G SBI Message Routing functionality by providing all the NRF profiles' information in the YAML file as described in the global parameters section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

**Note**

- This feature is enabled automatically if you are deploying SCP with Release 16 of Model C. For more information about Model C, see [Support for Model C Indirect 5G SBI Communication](#).
- You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

**Configure**

You can configure the 5G SBI Message Routing functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure routing options, see [Configuring Routing Options](#).
- **Configure using REST API:** For information about configuring routing options, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

**Observe**

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

**Maintain**

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.29.1 5G SBI Notification Requests Processing

The following table describes ApiPrefix usage in notification messages at SCP:

Table 3-39 5G SBI Notification Requests Processing

| Notification Message Received at SCP   |                   |                               | Forwarded Notification Message to NextHop SCP (SCP-P) |                     |                                                                                 | Forwarded Notification Message to Target NF |                         |                                   | Description                                                                                        |
|----------------------------------------|-------------------|-------------------------------|-------------------------------------------------------|---------------------|---------------------------------------------------------------------------------|---------------------------------------------|-------------------------|-----------------------------------|----------------------------------------------------------------------------------------------------|
| 3gpp-sbi-target-apiRoot Header         | :authority Header | :path Header                  | 3gpp-sbi-target-apiRoot Header                        | :authority Header   | :path Header<br>If the next hop SCP has published ApiPrefix in the SCP profile. | Routing Attempt                             | :authority Header       | :path Header                      | -                                                                                                  |
| scheme://NF-C1.com:port/NF-C1ApiPrefix | scp.com:port      | scpApiPrefix/notification Uri | scheme://NF-C1.com:port/NF-C1ApiPrefix                | nextHopScp.com:port | {nextHopScpApiPrefix}/notification Uri                                          | Primary routing                             | scheme://NF-C1.com:port | NF-C1ApiPrefix/notification Uri   | While registering with NRF, the notification handling service published apiPrefix in NFProfile.    |
|                                        |                   |                               |                                                       |                     |                                                                                 | Alternate routing                           | scheme://NF-C2.com:port | {NF-C2ApiPrefix}/notification Uri | NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service. |
| scheme://NF-C1.com:port/               | scp.com:port      | scpApiPrefix/notification Uri | scheme://NF-C1.com:port/                              | nextHopScp.com:port | {nextHopScpApiPrefix}/notification Uri                                          | Primary routing                             | scheme://NF-C1.com:port | /notification Uri                 | NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service. |

Table 3-39 (Cont.) 5G SBI Notification Requests Processing

| Notification Message Received at SCP   |                   |                   | Forwarded Notification Message to NextHop SCP (SCP-P) |                     |                                                                                 | Forwarded Notification Message to Target NF |                         |                                   | Description                                                                                        |
|----------------------------------------|-------------------|-------------------|-------------------------------------------------------|---------------------|---------------------------------------------------------------------------------|---------------------------------------------|-------------------------|-----------------------------------|----------------------------------------------------------------------------------------------------|
| 3gpp-sbi-target-apiRoot Header         | :authority Header | :path Header      | 3gpp-sbi-target-apiRoot Header                        | :authority Header   | :path Header<br>If the next hop SCP has published ApiPrefix in the SCP profile. | Routing Attempt                             | :authority Header       | :path Header                      | -                                                                                                  |
|                                        |                   |                   |                                                       |                     |                                                                                 | Alternate routing                           | scheme://NF-C2.com:port | {NF-C2ApiPrefix}/notification Uri | NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service. |
| scheme://NF-C1.com:port/NF-C1ApiPrefix | scp.com:port      | /notification Uri | scheme://NF-C1.com:port/                              | nextHopScp.com:port | {nextHopScpApiPrefix}/notification Uri                                          | Primary routing                             | scheme://NF-C1.com:port | NF-C1ApiPrefix/notification Uri   | SCP is deployed without apiPrefix in SCP profile.                                                  |
|                                        |                   |                   |                                                       |                     |                                                                                 | Alternate routing                           | scheme://NF-C2.com:port | {NF-C2ApiPrefix}/notification Uri | NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service. |
| scheme://NF-C1.com:port/               | scp.com:port      | /notification Uri | scheme://NF-C1.com:port/                              | nextHopScp.com:port | {nextHopScpApiPrefix}/notification Uri                                          | Primary routing                             | scheme://NF-C1.com:port | /notification Uri                 | SCP and the notification handling service are deployed without an apiPrefix in the NFProfile.      |

Table 3-39 (Cont.) 5G SBI Notification Requests Processing

| Notification Message Received at SCP     |                   |                                           | Forwarded Notification Message to NextHop SCP (SCP-P)           |                     |                                                                                 | Forwarded Notification Message to Target NF |                         |                                  | Description                                                                                        |
|------------------------------------------|-------------------|-------------------------------------------|-----------------------------------------------------------------|---------------------|---------------------------------------------------------------------------------|---------------------------------------------|-------------------------|----------------------------------|----------------------------------------------------------------------------------------------------|
| 3gpp-sbi-target-apiRoot Header           | :authority Header | :path Header                              | 3gpp-sbi-target-apiRoot Header                                  | :authority Header   | :path Header<br>If the next hop SCP has published ApiPrefix in the SCP profile. | Routing Attempt                             | :authority Header       | :path Header                     | -                                                                                                  |
|                                          |                   |                                           |                                                                 |                     |                                                                                 | Alternate routing                           | scheme://NF-C2.com:port | {NF-C2ApiPrefix}/notificationUri | NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service. |
| Delegated Discovery notification request | scp.com:port      | {scpApiPrefix}/scp-default-sub-notify-uri | scheme://NF-C1.com:port/<br>• Select ed target notification URI | nextHopScp.com:port | {nextHops cpApiPrefix}/notificationUri                                          | Primary routing                             | scheme://NF-C1.com:port | {NF-C1ApiPrefix}/notificationUri | Notification URI is used according to the published NFProfile based on discovery responses .       |
|                                          |                   |                                           |                                                                 |                     |                                                                                 | Alternate routing                           | scheme://NF-C2.com:port | {NF-C2ApiPrefix}/notificationUri | Notification URI is used according to the published NFProfile based on discovery responses .       |

Table 3-39 (Cont.) 5G SBI Notification Requests Processing

| Notification Message Received at SCP     |                   |                             | Forwarded Notification Message to NextHop SCP (SCP-P)          |                     |                                                                                 | Forwarded Notification Message to Target NF |                         |                                   | Description                                                                                 |
|------------------------------------------|-------------------|-----------------------------|----------------------------------------------------------------|---------------------|---------------------------------------------------------------------------------|---------------------------------------------|-------------------------|-----------------------------------|---------------------------------------------------------------------------------------------|
| 3gpp-sbi-target-apiRoot Header           | :authority Header | :path Header                | 3gpp-sbi-target-apiRoot Header                                 | :authority Header   | :path Header<br>If the next hop SCP has published ApiPrefix in the SCP profile. | Routing Attempt                             | :authority Header       | :path Header                      | -                                                                                           |
| Delegated Discovery notification request | scp.com:port      | /scp-default-sub-notify-uri | scheme://NF-C1.com:port/<br>• Selected target notification URI | nextHopScp.com:port | {nextHopScpApiPrefix}/notification Uri                                          | Primary routing                             | scheme://NF-C1.com:port | {NF-C1ApiPrefix}/notification Uri | Notification URI is used according to the published NFProfile based on discovery responses. |
|                                          |                   |                             |                                                                |                     |                                                                                 | Alternate routing                           | scheme://NF-C2.com:port | {NF-C2ApiPrefix}/notification Uri | Notification URI is used according to the published NFProfile based on discovery responses. |

### Obtaining NF Information from Notification Requests

SCP obtains the target producer NF information from `nfset` and `nfinst` attributes of the notification request even if the `3gpp-Sbi-Routing-Binding` header does not contain the `servname` attribute. In this case, SCP pegs the exact values of the producer NF type in `ocscp_nf_type` and `ocscp_nf_service_type` dimensions of the respective metrics. The format of dimension values are as follows:

- `ocscp_nf_type=<extracted_nftype>`
- `ocscp_nf_service_type=<extracted_nftype>-unknown`

Where,

- `<extracted_nftype>` is the target producer NF type.
- `unknown` indicates that the `servname` attribute is absent in the `3gpp-Sbi-Routing-Binding` header.

In case the `servname` attribute is present in the `3gpp-Sbi-Routing-Binding` header, SCP pegs the exact values of the producer NF type in `ocscp_nf_type` and `ocscp_nf_service_type` dimensions of the respective metrics. The format of dimension values are as follows:

- `ocscp_nf_type=<extracted_nftype_fromservname>`
- `ocscp_nf_service_type=<extracted_nftype_fromservname>-<service name>`

Where,

- `<extracted_nftype_fromservname>` is the target producer NF type extracted from the `servname` attribute.
- `<service name>` is the service name present in the 3gpp-Sbi-Routing-Binding header.

### 3.29.1.1 Enhanced Notifications Handling

In SCP 25.1.100 and earlier releases, SCP was able to alternate route notification requests when the incoming request contained the `servName` attribute in the 3gpp-Sbi-Routing-Binding header.

The `servName` attribute identifies the service name of the producer NF, for example, in the following 3gpp-Sbi-Routing-Binding header content, `servName` is `nsmf-pdusession` for the producer NF type SMF:

```
3gpp-Sbi-Routing-Binding:bl=nf-  
instance;nfinst=smf1;nfset=smfset1;servname=nsmf-pdusession
```

When the 3gpp-Sbi-Routing-Binding header did not contain the `servName` attribute, SCP was unable to alternate route the notification requests. In the absence of the `servName` attribute, SCP relied on NF profile level information to route to the alternate destinations or producer NFs. However, the information in NF profile at the profile level was insufficient to perform routing.

With the Enhanced Notification Handling feature, SCP can alternate route notification requests in the following conditions:

- If the 3gpp-Sbi-Target-apiRoot header is absent but the 3gpp-Sbi-Routing-Binding header is present without the `servName` attribute, SCP can alternate route notification requests by determining alternate NF either by using `NFInstanceID` or `NFSet` present in the 3gpp-Sbi-Routing-Binding header.
- If the 3gpp-Sbi-Routing-Binding header is absent but the 3gpp-Sbi-Target-apiRoot header is present in the notification request, SCP can alternate route notification requests using reverse lookup.

Sample 3gpp-Sbi-Routing-Binding header content without the `servName` attribute:

```
3gpp-Sbi-Routing-Binding:bl=nf-instance;nfinst=smf1;nfset=smfset1
```

SCP selects an equivalent producer NF using the `nfset` attribute in the 3gpp-Sbi-Routing-Binding header for alternate routing. If SCP is unable to determine the service type of the notification requests, SCP uses profile level information from the registered profiles of the producer NFs for routing and alternate routing the requests.

When SCPC-Notification processes NF profiles, it uses the `nfProfile-level-attribute-config-data` REST API parameters to configure scheme, port, capacity, and priority to create profile level default service objects while creating routing rules. SCP uses these profile level routing rules to alternate route notification requests without service names. SCP uses these parameters from the REST API config if they are absent in the NF profile at the profile level. If present, that will get priority.



Sample nfProfile-level-attribute-config-data REST API configuration:

```
{,
  "notificationAttributes": {
    "scheme": "http",
    "port": 80,
    "capacity": 65535,
    "priority": 1
  },
}
```

The following table describes the handling of notification requests with different header combinations:

**Table 3-40 Alternate Routing Behavior Using Different Header Combinations**

| Notification Contains 3gpp-Sbi-Target-apiRoot | Notification Contains 3gpp-Sbi-Routing-Binding | SCP's Behavior in 25.1.100 and Earlier                                                                                                                      | SCP's Behavior in 25.1.200 and Later                                                                                                                                                                                                                                                                 |
|-----------------------------------------------|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Yes                                           | Yes                                            | <ul style="list-style-type: none"> <li>SCP alternate routes if servName is present.</li> <li>SCP does not alternate route if servName is absent.</li> </ul> | SCP alternate routes whether servName is present or absent.                                                                                                                                                                                                                                          |
| Yes                                           | No                                             | SCP does not alternate route.                                                                                                                               | SCP alternate routes if alternateRoutingWithoutServname is set to true.<br><b>Note:</b> In case the 3gpp-Sbi-Routing-Binding header is absent but the 3gpp-Sbi-Target-apiRoot header is present in the notification request, SCP can alternate route notification requests using the reverse lookup. |
| No                                            | Yes                                            | <ul style="list-style-type: none"> <li>SCP alternate routes if servName is present.</li> <li>SCP does not alternate route if servName is absent.</li> </ul> | SCP alternate routes whether servName is present or absent.<br>In case servName is absent, SCP alternate routes if alternateRoutingWithoutServname is set to true.                                                                                                                                   |
| No                                            | No                                             | Routing fails with "400: Insufficient Routing details" response.                                                                                            | Routing fails with "400: Insufficient Routing details" response.                                                                                                                                                                                                                                     |

## Managing Enhanced Notifications Handling

### Enable

This feature is disabled at the time of SCP deployment. You can enable or disable this feature using the CNC Console as described in [Configuring Enhanced Notifications Handling](#).

### Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see
  - [Configuring Enhanced Notifications Handling](#) to enable the feature.
  - [Configuring NF Profile Level Attribute Configuration Data](#) to configure NF profile level attribute configurations data.

- [Configuring NF Profile Level Attribute](#) to configure NF profile level attributes for a specific NFType.
- **Configure using REST APIs:** For information about configuring REST APIs, see "Configuring NF Profile Level Attribute" and "Configuring NF Profile Level Attribute Configuration Data" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

The `ocscp_worker_rx_notification_req_total` metric is added in the [Metrics](#) section.

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.29.2 5G SBI Service Requests Processing

The ApiPrefix usage in service request messages at SCP are as follows:

**Table 3-41 5G SBI Service Requests Processing**

| 5G SBI Request Message Received at SCP |                   |                                                           | SBI Service Request to NextHop SCP     |                     |                                                                                                                                        | Forwarded SBI Service Request Message to Target NF |                         |                                                              | Description                                                                  |
|----------------------------------------|-------------------|-----------------------------------------------------------|----------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------|--------------------------------------------------------------|------------------------------------------------------------------------------|
| 3gpp-sbi-target-apiRoot Header         | :authority Header | :path Header                                              | 3gpp-sbi-target-apiRoot Header         | :authority Header   | :path Header                                                                                                                           | Routing Attempt                                    | :authority Header       | :path Header                                                 | -                                                                            |
| scheme://NF-P1.com:port/NF-P1ApiPrefix | scp.com:port      | scpApiPrefix/<apiName>/<apiVersion>apiSpecificResourceURI | scheme://NF-P1.com:port/NF-P1ApiPrefix | nextHopScp.com:port | {nextHopScpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI<br>If the next hop SCP has published ApiPrefix in the SCP profile. | Primary routing                                    | scheme://NF-P1.com:port | NF-P1ApiPrefix/<apiName>/<apiVersion>/apiSpecificResourceURI | While registering with NRF, the NF service published apiPrefix in NFProfile. |

Table 3-41 (Cont.) 5G SBI Service Requests Processing

| 5G SBI Request Message Received at SCP |                   |                                                            | SBI Service Request to NextHop SCP |                     |                                                                                                                                        | Forwarded SBI Service Request Message to Target NF |                         |                                                                | Description                                                                                              |
|----------------------------------------|-------------------|------------------------------------------------------------|------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| 3gpp-sbi-target-apiRoot Header         | :authority Header | :path Header                                               | 3gpp-sbi-target-apiRoot Header     | :authority Header   | :path Header                                                                                                                           | Routing Attempt                                    | :authority Header       | :path Header                                                   | -                                                                                                        |
|                                        |                   |                                                            |                                    |                     |                                                                                                                                        | Alternate routing                                  | scheme://NF-P2.com:port | {NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI | NF-P2ApiPrefix is used according to deployment and the apiPrefix value in the NFProfile for the service. |
| scheme://NF-P1.com:port/               | scp.com:port      | scpApiPrefix/<apiName>/<apiVersion>/apiSpecificResourceURI | scheme://NF-P1.com:port/           | nextHopScp.com:port | {nextHopScpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI<br>If the next hop SCP has published ApiPrefix in the SCP profile. | Primary routing                                    | scheme://NF-P1.com:port | /<apiName>/<apiVersion>/apiSpecificResourceURI                 | NF service is not supporting apiPrefix and not published in NF Profile.                                  |
|                                        |                   |                                                            |                                    |                     |                                                                                                                                        | Alternate routing                                  | scheme://NF-P2.com:port | {NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI | NF-P2ApiPrefix is used according to deployment and the apiPrefix value in the NFProfile for the service. |
| scheme://NF-P1.com:port/NF-P1ApiPrefix | scp.com:port      | /<apiName>/<apiVersion>/apiSpecificResourceURI             | scheme://NF-P1.com:port/           | nextHopScp.com:port | {nextHopScpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI<br>If the next hop SCP has published                               | Primary routing                                    | scheme://NF-P1.com:port | NF-P1ApiPrefix/<apiName>/<apiVersion>/apiSpecificResourceURI   | SCP is deployed without apiPrefix in SCP profile.                                                        |

Table 3-41 (Cont.) 5G SBI Service Requests Processing

| 5G SBI Request Message Received at SCP           |                   |                                                               | SBI Service Request to NextHop SCP                         |                     |                                                                                                                                          | Forwarded SBI Service Request Message to Target NF |                          |                                                                 | Description                                                                                              |
|--------------------------------------------------|-------------------|---------------------------------------------------------------|------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|--------------------------|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| 3gpp-sbi-target-apiRoot Header                   | :authority Header | :path Header                                                  | 3gpp-sbi-target-apiRoot Header                             | :authority Header   | :path Header                                                                                                                             | Routing Attempt                                    | :authority Header        | :path Header                                                    | -                                                                                                        |
|                                                  |                   |                                                               |                                                            |                     | ApiPrefix in the SCP profile.                                                                                                            | Alternate routing                                  | scheme:// NF-P2.com:port | {NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResource URI | NF-P2ApiPrefix is used according to deployment and the apiPrefix value in the NFProfile for the service. |
| scheme:// NF-P1.com:port/                        | scp.com:port      | / <apiName>/<apiVersion>/apiSpecificResource URI              | scheme:// NF-P1.com:port/                                  | nextHopScp.com:port | {nextHops cpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResource URI<br>If the next hop SCP has published ApiPrefix in the SCP profile. | Primary routing                                    | scheme:// NF-C1.com:port | / <apiName>/<apiVersion>/apiSpecificResource URI                | SCP and NF service are deployed without an api prefix in the NFProfile.                                  |
|                                                  |                   |                                                               |                                                            |                     |                                                                                                                                          | Alternate routing                                  | scheme:// NF-C2.com:port | {NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResource URI | NF-P2ApiPrefix is used according to deployment and the apiPrefix value in the NFProfile for the service. |
| Delegated Discovery 5G SBI request (Not Present) | scp.com:port      | {scpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResource URI | scheme:// NF-P1.com:port/ Selected target notification URI | nextHopScp.com:port | {nextHops cpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResource URI<br>If the next hop SCP has published                               | Primary routing                                    | scheme:// NF-P1.com:port | {NF-P1ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResource URI | apiRoot is created according to the published NFProfile based on discovery responses.                    |

Table 3-41 (Cont.) 5G SBI Service Requests Processing

| 5G SBI Request Message Received at SCP           |                   |                             | SBI Service Request to NextHop SCP                       |                     |                                                                                                                                         | Forwarded SBI Service Request Message to Target NF |                         |                                                                | Description                                                                           |
|--------------------------------------------------|-------------------|-----------------------------|----------------------------------------------------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------|----------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 3gpp-sbi-target-apiRoot Header                   | :authority Header | :path Header                | 3gpp-sbi-target-apiRoot Header                           | :authority Header   | :path Header                                                                                                                            | Routing Attempt                                    | :authority Header       | :path Header                                                   | -                                                                                     |
|                                                  |                   |                             |                                                          |                     | ApiPrefix in the SCP profile.                                                                                                           | Alternate routing                                  | scheme://NF-P2.com:port | {NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI | apiRoot is created according to the published NFProfile based on discovery responses. |
| Delegated Discovery 5G SBI request (Not Present) | scp.com:port      | /scp-default-sub-notify-uri | scheme://NF-P1.com:port/Selected target notification URI | nextHopScp.com:port | {nextHops cpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI<br>If the next hop SCP has published ApiPrefix in the SCP profile. | Primary routing                                    | scheme://NF-P1.com:port | {NF-P1ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI | apiRoot is created according to the published NFProfile based on discovery responses. |
|                                                  |                   |                             |                                                          |                     |                                                                                                                                         | Alternate routing                                  | scheme://NF-P2.com:port | {NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI | apiRoot is created according to the published NFProfile based on discovery responses. |

## 3.30 Message Priority Assignment and Override

The "3gpp-Sbi-Message-Priority" header is defined to carry the message priority of 5G messages. Service Communication Proxy (SCP) includes or modifies the header based on the configuration parameters.

The operator can assign or override the message priority of 5G messages as per their network requirements. SCP uses the message priority in prioritising the message in congestion or overload features.

### Managing Message Priority Assignment and Override

#### Enable

Not applicable.

## Configure

You can configure the Message Priority Assignment and Override functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure message priority options, see [Configuring SBI Message Priority](#).
- **Configure using REST API:** For information about how to configure message priority options, see "Configuring SBI Message Priority for Pod Overload Control" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

## Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

## Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.31 Outlier Detection

The Outlier Detection feature monitors the status of each endpoint of the producer NF or NF services. Upstream producer endpoints that continuously return the service responses with non-2xx status codes are removed from the routing pool for a predefined period based on the configured non-2xx status codes, counts, and ejection time.

In SCP 22.4.0, this feature is enhanced to support outlier detection for upstream NFs, which includes local producer NFs, next-hop SCP, and next-hop SEPP.

When SCP receives a message request from a consumer NF, it routes the message request to the target upstream NFs if the upstream NF is healthy. When SCP receives non-2xx status codes consecutively from the target upstream NF, SCP marks the upstream NF unhealthy after the number of error responses exceeds the preconfigured value. For example, if the `consecutiveErrors` parameter range is set to 5, after receiving five consecutive errors from upstream NF1, SCP marks the upstream NF1 as degraded or unhealthy. When SCP receives the sixth message request from the consumer NF, it routes the message request to upstream NF2 or any other available upstream NF without considering upstream NF1, which is marked unhealthy. SCP starts forwarding message requests to upstream NF1 after the configured time period as defined in the `baseEjectionTime` parameter. For more information about `consecutiveErrors` and `baseEjectionTime` parameters, see "Configuring Outlier Detection" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

For the next hop, SCP or SEPP, these error codes are SCP or SEPP-generated errors. These error responses contain a server header that includes the FQDN of SCP or SEPP.

**Note**

SCP resets outlier detection data for producer NF profile updates.

## Managing Outlier Detection

### Enable

To enable the Outlier Detection feature, complete the following configurations as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*:

- For specific NF service, set `odEnabled` to `true`, and then configure `odRuleName` as described in the "Configuring Routing Options" section.
- For Inter SCP scenarios, set `odEnabled` to `true` and configure `odScpRuleName` as described in the "Configuring System Options" section.
- For Inter PLMN routing scenarios, set `odSeppEnabled` to `true` and configure `odSeppRuleName` as described in the "Configuring System Options" section.

### Configure

You can configure Outlier Detection feature using the CNC Console and REST API.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Global Options](#) and [Configuring Outlier Detection](#).
- **Configure using REST API:** For information about REST API configurations, see "Outlier Detection Configuration", "Configuring System Options", and "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.32 Circuit Breaking

The Circuit Breaking feature is triggered on a per NF service instance (including all of the service's IP endpoints or FQDNs) when its outstanding transactions exceed a preconfigured value. If outstanding transaction exceeds the preconfigured value and alternate routing is configured, the message requests are routed to alternate NFs. When Circuit Breaking is activated, message requests are routed alternatively or rejected.

## Managing Circuit Breaking

### Enable

This feature is enabled using REST API parameters as per the following scenarios:

- For routing SBI messages directly to producer NFs, set `cbEnabled` to true in Routing Options REST APIs as described in "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- For routing notification messages directly to producer NFs, set `cbEnabled` to true in Routing Config Set REST APIs as described in "Routing Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- For InterPLMN and InterSCP routing, set `cbScpEnabled` and `cbSeppEnabled` to true in System Options REST APIs as described in "Configuring System Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Configure

You can configure this feature using the CNC Console and REST APIs.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Global Options](#) and [Circuit Breaking Configurations](#).
- **Configure using REST API:** For information about REST API configurations, see "Circuit Breaking Configurations", "Configuring System Options", "Routing Config Set", and "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.33 Canary Release

The Canary Release feature inspects the API version attribute of the NF service profile published by the NFs during NF registration or update. In case there is a new version of the API, Service Communication Proxy (SCP) identifies the version as a canary version if the version matches the configured value.

The older version is considered as the Production version and the new version of the service instance is considered as the Canary version. SCP distributes traffic between Production version and Canary version based on the operator configuration.



When the canary version's deployment is complete, the production version is upgraded to the canary version.

### Managing Canary Release

#### Enable

You can enable the Canary Release functionality using the CNC Console or REST API.

- **Enable using CNC Console:** To enable the Canary Release feature, set the **Canary Release Flag** switch to **Enabled** as described in [Configuring Canary Release](#).
- **Enable using REST API:** To enable the Canary Release feature using REST API, set the `canaryReleaseFlag` parameter to `true` as described in "Configuring Canary Release Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Note

Canary Release must be enabled for each service.

#### Configure

You can configure the Canary Release functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure Canary Release, see [Configuring Canary Release](#).
- **Configure using REST API:** For information about how to configure Canary Release, see "Configuring Canary Release Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.34 Static Configuration of NF Profiles

The Static Configuration Fallback feature provides a static configuration of NF profiles when georedundant NRFs in the network fail. Under failure conditions, when NRF is not configured, or when static configurable routing is preferred, Service Communication Proxy (SCP) uses the user configured or updated NF profiles. SCP retains the 5G topology information from NRF for further operations. It allows fallback to a static mode of operation for modifying the previously discovered NF producer profiles through NRF and adds any new NF producer profile while the NRFs are unavailable.

The following configurations are used for the Static Configuration Fallback feature:

- **TopologySourceInfo:** This is the configuration used by SCP to determine the 5G topology source. SCP learns and creates the routing rules accordingly.
- **5G NF topology information:** This information is available with SCP after learning the 5G topology from the defined source as per the previous section configuration either from NRF or a static method.
- You can create or modify the 5G NF profile information using REST APIs.

## Managing Static Configuration

### Enable

You can enable the Static Configuration feature by setting the `scpcconfiguration.defaultTopologySource` parameter to `LOCAL` in the `scpc` configuration section of the `values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

#### Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

### Configure

You can configure the Static Configuration feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure the Static Configuration feature, see [Configuring Topology Source Info](#).
- **Configure using REST API:** For information about how to configure the Static Configuration feature, see "Configuring NF Topology Groups" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.35 Preventive Audit on Last NF Instance

SCP determines the network topology from NRF by subscribing to each NF type. When a new NF instance is registered in the network, SCP receives a registration notification from the NRF and creates a routing rule based on the NF profile in the notification.

SCP removes the routing rule for an NF instance after receiving a deregistration notification from NRF.

When the primary NRF communication breaks, the producer NF registers with the configured secondary NRF. In case the primary NRF is not notified about this reregistration, then it sends a deregistration notification to SCP. This results in the removal of the routing rule at SCP. Also, it causes network failure if repeated for multiple NF instances.

With the introduction of the Preventive Audit on Last NF Instance feature, SCP can control NRF failure scenarios in the network by performing the preventive audit (discovery). This audit is performed with all the configured regional NRFs before removing the last NF instance of a particular NF type. If any NRF returns the success discovery response with NF profiles, SCP creates the routing rules based on the discovery response. SCP raises an alert to notify operators about such NRF failure scenarios.

### Managing Preventive Audit on Last NF Instance

#### Enable

You can enable the Preventive Audit on Last NF Instance feature by setting the `preventiveAuditOnLastNFInstanceDeletion` parameter to `true` in the global parameters section of the `values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

#### Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

#### Configure

There is no specific configuration required for the Preventive Audit on Last NF Instance feature.

#### Observe

There is no specific metrics and alerts required for the Preventive Audit on Last NF Instance feature.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.36 Rate Limiting

Service Communication Proxy (SCP) provides the Rate Limiting feature to:

- protect the network from consumer NFs that might overload the network with service requests.
- protect the producer NF instance from getting overloaded.

### 3.36.1 Local Rate Limit Feature

SCP uses the token bucket algorithm in the Rate Limit feature functionality to track the allowed and consumed tokens in a given time period as per rate limit configuration.


In the following ways SCP uses the distributed cache to aggregate the token consumption across scp-worker pods of an SCP instance:

1. Over a 1 second time period, the rate limit framework divides the configured rate into smaller slots of 100milliseconds each.
2. SCP monitors the difference between the actual request message rate received and the total request messages, i.e., allowed to send in the 100 milliseconds window as calculated.
3. Each SCP worker pod also calculates its own share of the total request message sent and accordingly decides on a batch of tokens to be preconsumed.
4. If at any time the scp-worker POD is not able to get a token, the request message is treated with rate limit treatment as per rate limit configuration.

#### Note

- The prediction of token batch count depends on the traffic rate detected in scp-worker PODs; hence, irregular traffic may lead to more token consumption by scp-workers. This may result in a difference between the overall message rate allowed and the configured rate.
- The rate limit framework expects a uniform traffic pattern over a second period for a configured rate.

**Figure 3-9 Local Rate Limit Feature Functional View**

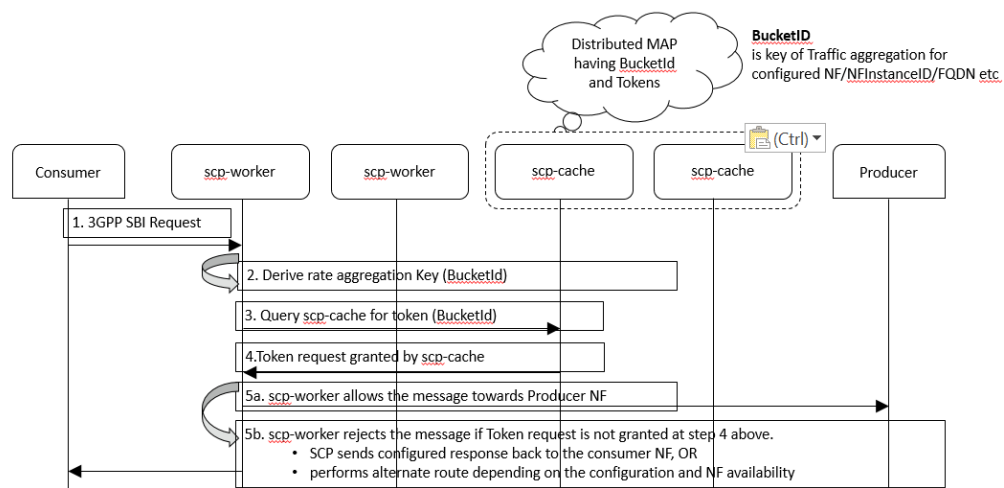

## 3.36.2 Global Rate Limit Feature

The global rate limit feature aggregates traffic rate data across multiple SCP instances and applies traffic rate control based on the configured aggregated rate.

The aggregated rate is configured at each SCP instance in the following way:

1. Each SCP instance monitors its own traffic routed count against the configured NF, NFInstanceID, FQDN, and so on, and reports the same to all other SCP instances.
2. Each SCP instance aggregates the total traffic routed against the configured NF, NFInstanceID, and FQDN from all SCP instances.
3. Each SCP also calculates its own share of routed traffic in the aggregated total routed traffic count, as well as the status of the difference between total routed traffic and the configured aggregated rate.
4. Global Rate Limit Control actions such as allowing or disallowing traffic are decided based on the data collected in the steps above.

### Note


Convergence of global rate data aggregation depends on network latency among the SCP instances, and higher latency can impact rate-limiting performance.

### Global Rate Working Principle

The working principle are as follows:

1. Each SCP instance has an aggregation cache, which syncs its own traffic route count with other SCP instances.
2. In this aggregation cache, a routed traffic rate count is maintained for each SCP instance.
3. Each SCP instance calculates the total traffic routed towards the configured NF, NFInstanceID, FQDN, and so on.
4. For example, the diagram depicts the aggregated routed traffic count for a FQDN, "udm.test.com," across all 3 SCP instances.
  - Sample configuration 1: A global rate limit is configured in 3 SCP instances for FQDN "udm.test.com" with a rate of 15000 per sec.
  - Sample configuration 2: A global rate limit is configured in 3 SCP instances for FQDN "udm.test.com" with a rate of 13000 per sec.
5. The global rate limit control action, such as allowing or disallowing the traffic, is decided based on the aggregated routed traffic count collected.
  - Action for configuration 1: Traffic is allowed since the total traffic routed rate is less than 15000 per sec.
  - Action for configuration 2: Traffic is throttled since the total traffic routed rate is greater than 13000 per sec.

Figure 3-10 Global Rate Limit Working Principle

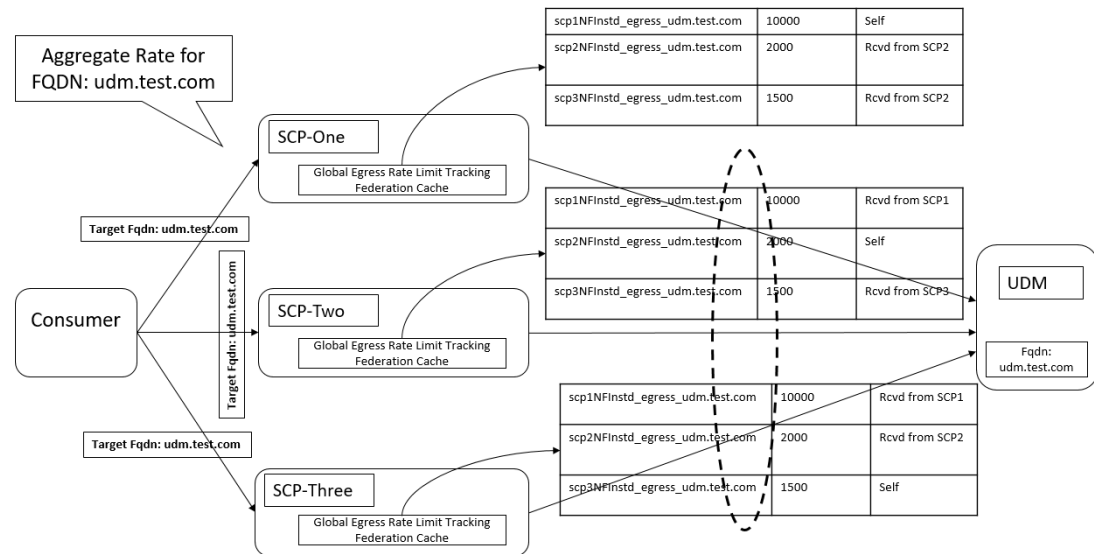

SCP supports rate limiting at the ingress and egress side.

If the SCP-cache service is unavailable, then SCP-worker continues to process service requests, however, rate limiting is not applied. If any SCP-worker is unavailable, it cannot move to the Ready state until SCP-cache initializes the rate limiting.

#### Note

- The Rate Limit framework depends on the ingress traffic pattern at SCP, and its variation reflects in traffic rate detection and applies throttling of messages in a distributed environment since it involves convergence of message rate for a specific rate limit configuration, for example, a configured allowed rate value for a specific FQDN of an NF service instance across multiple scp-worker service pods.
- The average allowed traffic rate with rate control may be achieved as per the configured allowed traffic rate over a few seconds. The instantaneous allowed traffic rate with rate control may have some variation with respect to the configured allowed traffic rate on a short time scale.

The following sections explain how the SCP Rate Limiting feature controls ingress and egress traffic.

### 3.36.3 Ingress Rate Limiting

The Ingress Rate Limiting feature protects the network from unsecured consumer NFs that might overload the network with message requests. SCP secures the network when aggregated ingress traffic from any registered NF instance exceeds the allowed traffic rate limit. If the traffic exceeds the allowed traffic rate limit, SCP does not process the traffic and responds with an error code. Operators can configure the error code. Otherwise, the default error code 429 is set.

With the enhanced Ingress Rate Limiting functionality, SCP can use the User-Agent or XFCC header in the ingress message request to identify the consumer NF and apply ingress rate limiting at the ingress side.

The traffic rate limit is set at the NF type level that is applicable for all NF instances. SCP obtains the FQDN of consumer NF from the x-forwarded-client-cert (XFCC) header in the incoming message request. SCP provides the configuration for ingress "allowed requests/sec" per NF type. This configuration is applicable for all NF instances of the NF type.

As most of the network do not provide XFCC header in the ingress message requests, SCP cannot rely on the XFCC header to fetch consumer NFs' identity. Therefore, as recommended by 3GPP, the User-Agent header can be added to service request by the consumer NF to communicate its identity. The User-Agent header is added to each ingress message request irrespective of the network type. This header contains consumer NF identity in the different formats.

SCP supports the following types of User-Agent header formats to retrieve the consumer NF identity:

- **Format1:** NFTYPE-NFINSTANCEID FQDN or NFTYPE-NFINSTANCEID-FQDN
- **Format2:** NFTYPE-FQDN NFINSTANCEID or NFTYPE-FQDN-NFINSTANCEID
- **Format3:** NFTYPE-NFINSTANCEID
- **Format4:** NFTYPE-FQDN

Where,

- NFTYPE indicates the type of consumer NF.
- NFINSTANCEID indicates the instance ID of the consumer NF.
- FQDN indicates the FQDN of the consumer NF.

Using the aforementioned parameters of User-Agent header, SCP obtains the consumer NF information and applies ingress rate limiting at the ingress side. SCP uses the ConsumerInfo REST API parameter to determine the header type such as XFCC or User-Agent, in the ingress message request. For more information about the ConsumerInfo REST API parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

SCP determines consumer NF identity such as NFTYPE, NFINSTANCEID, or FQDN, from the User-Agent header and applies the ingress rate limiting configurations in the following sequence:

1. NFINSTANCEID
2. FQDN
3. NFTYPE

If SCP determines any one of the configurations as per the order, SCP stops searching for the remaining configurations and uses the retrieved configurations for ingress rate limiting.

### Example of Ingress Rate Limiting Configuration

You can configure ingress request rate for all NF instances of an NFType so that this configuration is applicable for all NF instances. You can configure MPS for a single NF instance identified by FQDN.

There are 10 Session Management Functions (SMFs) determined by SCP. The maximum traffic limit for all SMFs except for SMF3, SMF4, and SMF7 is 1000 MPS.

1. The maximum ingress requests limit from SMF3 is 600 MPS.

2. The maximum ingress requests limit from SMF4 with instance ID 26740918-e9cd-0205-aada-71a76214d33c is 200 MPS.
3. The maximum ingress requests limit from SMF7 is 400 MPS.

**Table 3-42 Example of Ingress Rate Limiting Configuration**

| Exception | NFType | FQDN             | NF Instance ID                       | MPS      |
|-----------|--------|------------------|--------------------------------------|----------|
| NA        | SMF    | -                | -                                    | 1000 MPS |
| 1         | -      | smf3.example.com | -                                    | 600 MPS  |
| 2         | -      | smf7.example.com | -                                    | 400 MPS  |
| 3         | -      | -                | 26740918-e9cd-0205-aada-71a76214d33c | 200 MPS  |

**Note**

The NF Instance ID parameter is used only in the User-Agent header.

**Ingress Rate Limiting Process Using the User-Agent or XFCC Header Parameter**

SCP uses the values of `primaryHeaderName` and `secondaryHeaderName` in the `ConsumerInfo` REST API parameter to identify the consumer NF in an ingress message request. When SCP receives an ingress message request, it searches for the `primaryHeaderName` value and follows the following methods to apply ingress rate limiting:

- If SCP finds `primaryHeaderName`, it considers the configured value such as XFCC header or User-Agent header, to identify the consumer NF and uses the configurations that match the consumer NF identity to apply ingress rate limiting. If SCP does not find any configurations for consumer NF, it does not apply ingress rate limiting.
- If SCP does not find `primaryHeaderName`, it searches for `secondaryHeaderName` and considers the configured value such as XFCC header or User-Agent header, to obtain the identity of the consumer NF and uses the configurations that match the consumer NF identity to apply ingress rate limiting. If SCP does not find any configurations for consumer NF, it does not apply ingress rate limiting.
- If SCP does not find `secondaryHeaderName`, it does not apply ingress rate limiting.

**Managing Ingress Rate Limiting****Enable**

The Ingress Rate Limiting feature is a core functionality of SCP. This feature is automatically enabled in SCP at the time of deployment.

**Configure**

You can configure the Ingress Rate Limiting feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about configuring the Ingress Rate Limiting feature, see [Configuring Ingress Rate Limiter Consumer Info](#) and [Configuring Ingress Rate Limiting](#).
- **Configure using REST API:** For information about configuring the Ingress Rate Limiting feature, see "Configuring Ingress Rate Limiting" and "Configuring Consumer NF Info" in



*Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide.*

### Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.36.4 Egress Rate Limiting

The Egress Rate Limiting feature protects the registered producer NF instance from getting overloaded. With this feature, SCP secures the network when aggregated egress traffic towards an NF instance exceeds the allowed traffic rate limit.

If the traffic exceeds the allowed limit, then SCP performs alternate routing by default. In case alternate routing is not configured, SCP responds with an error code.

Operators can configure the error code. Otherwise, the default error code 503 is set.

To determine the destination of the request, SCP checks the API root and authority information in the request header. SCP also checks the service name and path to identify the service type in the request header. Considering this information, SCP provides the configuration for "egress allowed requests/sec" per NF type. This configuration is applicable for all NF instances of the NF type.

### Example of Egress Rate Limiting Configuration

You can configure Messages Per Second (MPS) for all NF instances of an NFType so that this configuration is applicable for all NF instances. You can configure MPS for single NF instance identified by FQDN.

There are 4 UDMs determined by SCP. The maximum traffic limit for all UDMs with the following exceptions is 400 MPS:

1. The maximum traffic limit for UDM3 is 500 MPS.
2. The maximum traffic limit for SDM service for all UDMs is 200 MPS.
3. The maximum traffic limit for UMD1 UECM service is 100 MPS.
4. The maximum traffic limit for UDM4 UEAU service is 600 MPS.

**Table 3-43 Example of Egress Rate Limiting Configuration**

| Exception | NFType | FQDN             | Service Name | MPS |
|-----------|--------|------------------|--------------|-----|
| NA        | UDM    | -                | -            | 400 |
| 1         | -      | Udm3.example.com | -            | 500 |
| 2         | -      | -                | Nudm_sdm     | 200 |

**Table 3-43 (Cont.) Example of Egress Rate Limiting Configuration**

| Exception | NFType | FQDN             | Service Name | MPS |
|-----------|--------|------------------|--------------|-----|
| 3         | -      | Udm1.example.com | Nudm_uecm    | 100 |
| 4         | -      | Udm4.example.com | Nudm_ueau    | 600 |

### Managing Egress Rate Limiting

#### Enable

The Egress Rate Limiting feature is a core functionality of SCP. This feature is automatically enabled in SCP at the time of deployment. To allow rate limit to occur, you must enable either per NF rate limit or make entries in the Egress table using the CNC Console.

#### Configure

You can configure the Egress Rate Limiting feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about configuring the Egress Rate Limiting feature, see [Configuring Egress Rate Limiting](#).
- **Configure using REST API:** For information about configuring the Egress Rate Limiting feature, see "Configuring Egress Rate Limiting" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.36.4.1 Global Egress Rate Limiting


The existing egress rate limiting functionality aggregates traffic rate for a target producer NF within one SCP instance across multiple pods of SCP-worker service. It does not aggregate the overall traffic rate towards the producer NF across multiple SCP instances. Therefore, the Global Rate Limiting feature is implemented so that a group of SCP instances coordinates among each other to ensure traffic rates for common destinations, that is, producer NFs, are aggregated and the egress rate limit is applied to the overall traffic rate.

The Global Egress Rate Limiting feature synchronizes and aggregates the egress rate data for multiple producer NFs among multiple SCP instances (up to three SCP instances). Based on the aggregated rate data, each SCP controls its traffic to ensure the global configured egress rate is achieved.

The SCP-cache microservice synchronizes egress rate data among multiple SCP instances. The participating SCP instances for the egress rate limiting aggregation details are configured

using Helm as described in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*. SCP uses an Oracle product called Oracle Coherence which offers federated caching to link multiple clusters so that cache data is automatically synchronized between clusters.

**Figure 3-11 Role of SCP-Cache**

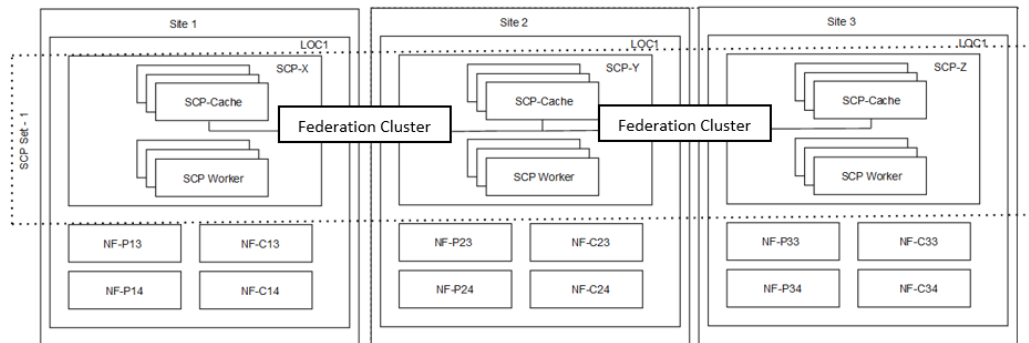

By default, the egress rate aggregation is disabled. After enabling the Global Egress Limiting feature using the `global_egress_ratelimit` parameter on the CNC Console, the egress rate aggregation uses `remoteScpOneEnabled` and `remoteScpTwoEnabled` parameters to enable rate data synchronization and aggregation with the corresponding remote instances of SCP. If the rate aggregation and synchronization are disabled or the communication fails with a remote SCP instance, the Global Egress Rate Limiting feature does not consider that remote SCP as part of the Global Federation cluster. Therefore, Global Rate Limit Algorithm does not consider any message rate related updates from that remote SCP while applying the rate limit.

## Managing Global Egress Rate Limiting

### Enable

You can enable this feature by setting `global_egress_ratelimit` to true. For more information, see [Configuring SCP Features](#).

### Configuring Participating SCP for Global Egress Rate Limit

Perform the following configuration while deploying SCP.

1. If the following Helm parameters of the participating SCP instances are available, add the required Helm parameters in case a single instance of SCP is used or add all the parameters in case both the instances of SCP are used to the `custom-values.yaml` file:
  - `coherence.federation.remoteScpOne.fqdnOrIp`
  - `coherence.federation.remoteScpOne.port`
  - `coherence.federation.remoteScpOne.clusterName`
  - `coherence.federation.remoteScpOne.nfInstanceId`
  - `coherence.federation.remoteScpTwo.fqdnOrIp`
  - `coherence.federation.remoteScpTwo.port`
  - `coherence.federation.remoteScpTwo.clusterName`

- `coherence.federation.remoteScpTwo.nfInstanceId`
- 2. Deploy SCP as described in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.
- 3. Enable global egress rate aggregation and control with the participating SCP instances using the CNC Console as described in [Configuring SCP Features](#).

Perform the following configuration if SCP is deployed.

1. Perform the same release upgrade using the following Helm parameters for the participating SCP instances in the `custom-values.yaml` file. Add the required parameters if one instance of SCP is used, otherwise add all the parameters if both the instances of SCP are used.
  - `coherence.federation.remoteScp0ne.fqdn0rIp`
  - `coherence.federation.remoteScp0ne.port`
  - `coherence.federation.remoteScp0ne.clusterName`
  - `coherence.federation.remoteScp0ne.nfInstanceId`
  - `coherence.federation.remoteScpTwo.fqdn0rIp`
  - `coherence.federation.remoteScpTwo.port`
  - `coherence.federation.remoteScpTwo.clusterName`
  - `coherence.federation.remoteScpTwo.nfInstanceId`

Only the `scp-cache` microservice restarts.

2. Enable global egress rate aggregation and control with the participating SCP instances using the CNC Console as described in [Configuring SCP Features](#).

## Configure

You can configure this feature using Helm and REST API.

- **Configure using Helm:** For information about Helm configurations, see "global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

### Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

- **Configure using REST API:** For information about REST API configurations, see "Configuring Egress Rate Limiting and Global Egress Rate Limiting" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

## Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

## Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

### 3.36.5 Egress and Ingress Key Combinations

This section provides information about different key combinations and key formats required to configure ingress and egress rate limiting entries.

Operators can use these key combinations for aggregating traffic to apply rate limit. The key format is obtained from the JSON body of the Rate Limiting configuration request.

#### Note

Operators must perform the search in the same sequence as mentioned in the following tables.

**Table 3-44 Egress Key Combination**

| Sequence | Key Combination    | Key Format                                                                                       |
|----------|--------------------|--------------------------------------------------------------------------------------------------|
| 1        | FQDN & ServiceType | FQDN_ServiceType                                                                                 |
| 2        | FQDN & NFType      | FQDN_NFType                                                                                      |
| 3        | FQDN               | FQDN                                                                                             |
| 4        | ServiceType        | NFInstanceID_serviceType<br><b>Note:</b> Look up NFInstanceID from Learnt NFProfiles using FQDN. |
| 5        | NFType             | NFInstanceID<br><b>Note:</b> Look up NFInstanceID from Learnt NFProfiles using FQDN.             |

**Table 3-45 Ingress Key Combination**

| Sequence | Key Combination | Key Format                                                                           |
|----------|-----------------|--------------------------------------------------------------------------------------|
| 1        | NfInstanceID    | NfInstanceID of the consumer NF.                                                     |
| 2        | FQDN            | FQDN                                                                                 |
| 3        | NFType          | NFInstanceID<br><b>Note:</b> Look up NFInstanceID from Learnt NFProfiles using FQDN. |

## 3.37 Support for Multus Container Network Interface

Multus Container Network Interface (CNI) is a plug-in that allows you to connect multiple network interfaces to pods in Kubernetes.

Each Kubernetes pod contains only one network interface. After integrating Multus CNI with SCP, you can create multiple interfaces in a pod and perform the following tasks:

- Create multiple signaling interfaces for routing the signaling traffic
- Create different interfaces for Operations, Administration, and Maintenance (OAM) and Signaling (SIG) traffic to enable traffic segregation


This feature configures the pods to use different network interfaces for different types of traffic. These interface IPs and routing information, such as range of IPs and gateways, are provided by Network Attachment Definition (NAD) Kubernetes custom resource. Multus CNI configures the IP routing rules based on this routing information.

For more information about Multus CNI, see <https://github.com/k8snetworkplumbingwg/multus-cni>.

#### **Note**

Default Pod IPs assigned by Kubernetes are used for establishing pod-to-pod and egress communication. When Multus CNI adds other network interfaces to pods, these interface IPs can be used for egress communication.

**Figure 3-12 Networking-Multus Support**

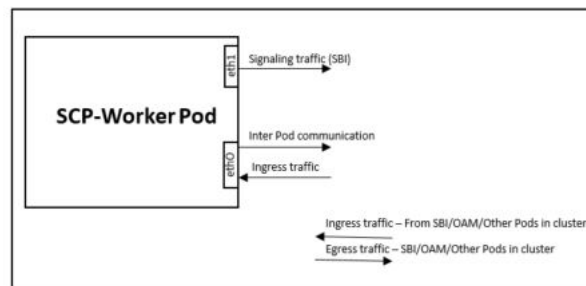

The diagram shows how support for Multus helps SCP to support multiple interfaces on egress traffic from the scp-worker pod.

#### **Note**

The Multus requirement is not applicable for SCP Control Pods.

The scp-worker pod is handling the following types of traffic:

- 5G SBI traffic
- Inter-pod communication traffic
- OAM traffic is communication traffic between observability components and scp-worker

The directions of this traffic are to and fro via SCP, and hence they are present in ingress and egress directions. There is no segregated ingress traffic. Only egress traffic is separated over multiple interfaces by dedicating Virtual network interface controllers (vNICs) to manage each type of traffic:

- Eth0 vNIC manages Egress (inter-pod communication traffic).

- Eth1 vNIC manages Egress 5G SBI traffic.

It is not required to separate OAM traffic from signaling traffic.

### Managing Multus Container Network Interface

#### Enable

The Multus CNI plug-in can be integrated with Service Communication Proxy (SCP) at the time of SCP installation.

#### Configure

To use this feature, complete the configuration as described in "Configuring Multus Container Network Interface" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

#### Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

#### Observe

There is no specific metrics and alerts required for Multus Container Network Interface.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.38 Support for Model C Indirect 5G SBI Communication

5G Service Based Interface (SBI) communication models are used to establish connections among NFs and NF services. These communication models facilitate consumer NFs to route service requests to producer NFs either directly or indirectly through Service Communication Proxy (SCP). For more information about different communication models, such as Model A, Model B, Model C, and Model D, see 3GPP TS 23.501 version 16.6.0 Release 16.

With the introduction of the Model C Indirect 5G SBI Communication format in SCP, the consumer NF sends NF discovery service requests to NRF. After receiving the discovery response with NF profiles, the consumer NF does the following:

- Selects an NF Set or a specific NF instance from the NF Set
- Sends a service request to SCP with the address of the selected service producer NF
- Creates multiple network interfaces for different subnet IPs

Where,

- NF Set is a group of interchangeable NF instances of the same type that supports the same services and the same Network Slices. NF instances in the same NF Set may be geographically distributed but have access to the same context data.
- NF instance is an instance of the NF that can be identified.
- NF Set Identifier (NF Set ID) is a globally unique identifier of a set of equivalent and interchangeable CP NFs from a given network that provides distribution, redundancy, and scalability.

Then, SCP selects an NF service instance and routes the service requests to the selected producer NF. In case of failure if reselection is required, SCP selects the producer NF instance based on the NF Set. The reselection is based on the binding header, if available.

### Support for Binding Headers in Model C Indirect 5G SBI Communication

SCP supports the following 5G SBI custom headers in Model C Indirect 5G SBI Communication:

- 3gpp-Sbi-Binding: This header contains a comma-delimited list of Binding Indications from an HTTP server for storage and use of HTTP clients. The absence of this parameter in a Binding Indication in a service request is interpreted as "callback".
- 3gpp-Sbi-Routing-Binding: This header contains a Routing Binding Indication to direct service request to an HTTP server which has the targeted NF service resource context.

SCP does not update the value of the "3gpp-Sbi-Binding" header in the HTTP/2 request or response. It supports reading value of the "3gpp-Sbi-Routing-Binding" header in the service request and uses the binding level in the "3gpp-Sbi-Routing-Binding" header to perform routing.

#### Note

Binding level NF service Set and NF service instance are not supported.

### Support for Load Balancing and Alternate Routing in Model C Indirect 5G SBI Communication

When the target producer NF is unavailable, then SCP determines the NF Set ID of the target producer NF and performs alternate routing on the NF ID set instances in a sequence until SCP completes all the configured routing attempts.

SCP uses the NF set or NF instance for load balancing and alternate routing.

### Support for Reverse Lookup in Model C Indirect 5G SBI Communication

When forward routing fails due to unavailability of the producer NF or the message does not have the NF Set ID, SCP performs reverse lookup in learned NF profiles. It performs alternate routing by obtaining destination information from the Set IDs. Reverse Lookup occurs when "3gpp-Sbi-Discovery-Target-Nfset" and "3gpp-Sbi-Routing-Binding" headers are absent in the message.

### Model C Indirect 5G SBI Communication Response Headers

Additional response headers supported by Model C Indirect 5G SBI Communication in case of alternate routing are as follows:

- "3gpp-Sbi-Producer-Id"
- Either "3gpp-Sbi-Target-apiRoot" or Location header



**Note**

Load Balancing or Forward Routing from routing options can not be configured with Release 16 of Model C Indirect 5G SBI Communication because forward routing occurs based on the "3gpp-Sbi-Target-apiRoot" header. If the "3gpp-Sbi-Target-apiRoot" header is unavailable, then only load balancing occurs based on NF Set ID in the binding header.

**Managing Model C Indirect 5G SBI Communication****Enable**

You can enable the Model C feature by adding `- rel16` under `releaseVersion` in the `ocscp-custom-values-<scp_release_number>.yaml` file. For more information about enabling this feature, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

**Note**

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

**Configure**

You must complete the fetching routing information configuration as described in "Fetching Release 16 Routing Rules" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

**Observe**

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

**Maintain**

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.39 Multiple SCP Deployment in the Same Kubernetes Cluster

This feature allows operators to deploy multiple SCP instances in the same Kubernetes cluster. Each SCP instance is deployed in a different namespace and is independent of each other. These SCP instances can use the same `cnDBTier` with a unique database name or a dedicated `cnDBTier` during the installation. `scpFqdn` is included as part of the SCP logs, metrics, and alerts to identify and filter logs, metrics, and alerts at Grafana or Kibana when multiple SCP instances are deployed in the same Kubernetes cluster.

## Managing Multiple SCP Deployment in the Same Kubernetes Cluster

### Enable

Not applicable.

### Configure

There is no specific configuration required for this feature. The following new dimensions are added to the respective metrics in the [Metrics](#) section:

- scpFqdn (for data plane)
- scp\_fqdn (for control plane)

### Observe

There is no specific metrics and alerts required for this feature.

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.40 Support for SCP Triplet Deployment

Using the Service Communication Proxy (SCP) Triplet Deployment model, operators can configure three SCP instances as mates for georedundancy. Each SCP instance in a triplet is configured to manage the overall traffic expected for the triplet so that when two SCP instances are unavailable, the single SCP instance can manage the overall traffic. For example, if the first and the second SCP instances are unavailable, then the third instance is dimensioned to manage the load of the first two instances.

With this feature, SCP can:

- configure two mated SCP.
- support forward routing, load balancing, and alternate routing to producers in its serving localities and serving localities of its mates.
- route the service request directly to any producer in its serving localities and serving localities of its mates.
- support inter-SCP routing to producers which are not in its serving localities and serving localities of its mates.
  - When SCP serving a particular locality is unavailable, then service requests are routed to mated SCPs based on priority.
  - When multiple SCPs with the same priority are serving the producer's locality, SCP supports load balancing.

## Managing SCP Triplet Deployment

### Enable

Not applicable.

### Configure

To use this feature, complete the configuration as described in "global Parameters" in *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

#### Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

### Observe

For information about metrics, see [Metrics](#).

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.41 Alternate Routing based on the DNS SRV Records

Using the Alternate Routing based on the Domain Name System (DNS) Service (SRV) Records feature, SCP performs alternate routing by querying SRV records with the DNS server to find an alternate producer NF and route the service request.

#### Note

- SCP uses either NF Set or DNS SRV Records to perform alternate routing.
- This feature is supported only in SCP Release 16 deployment with Model C Indirect 5G SBI Communication. For more information about Release 16, see 3GPP TS 23.501.

SCP performs the DNS SRV query for the FQDNs determined from NF profiles to find an alternate NF instance and route the services requests to the newly discovered alternate producer NF. These FQDNs are sourced from Network Repository Function (NRF) notifications received at SCP and from operator's configuration, which is statically configured through *scpc-configuration* as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

The DNS SRV Resource record known as Service Proto Name (SPN) is used to identify the target NF type. If there are multiple instances of the same alternate NF profiles in a DNS resolution response for handling the same service request, then the appropriate target producer NF is selected using priority and weight attributes provided in the *DNSSRVRecord*

data model as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

This feature introduces the `scpc-alternate-resolution` microservice to perform the following tasks:

- Find alternate NF services by sending DNS SRV queries to the DNS server and receive the DNS SRV responses.
- Refresh DNS SRV records to get update in DNS SRV records.
- Provide DNS SRV records to `scp-worker` when required.

### DNS SRV Default Scheme

SCP obtains FQDNs from the NF profiles and creates alternate routing records for each FQDN. Alternate routes are obtained by querying the configured DNS server. To query the DNS server, SCP creates an SPN entry for each FQDN by determining the scheme, such as `http` or `https`, for each FQDN.

Example of an SPN entry is as follows:

```
_http._tcp.udm1svc.scpsvc.svc.cluster.local
```

In an NF profile, FQDNs are available at the profile level and service level. For service level FQDNs, the scheme is defined at the service level. However, for profile level FQDNs, the scheme is not defined in the profile. Earlier, SCP used `"http"` as the default scheme for profile level FQDNs when creating SPNs. However, for operators who use `"https"`, this results in not getting alternate routes for the profile level FQDN from the DNS server.

Therefore, the following Helm configuration is introduced to determine the scheme to be used for SPN creation for profile level FQDNs:

```
dnsSrvSchemeConfig:  
  defaultScheme: "https"  
  exceptionList: [""]
```

`defaultScheme` is the default scheme used for creating Domain Name System (DNS) Service (SRV) Service Proto Name (SPN) from NF profile level FQDN. SCP also supports per NF type scheme selection. This is achieved by `exceptionList`, which defines the NF types that use a non-default scheme. For example, if `defaultScheme` is `"https"` and `exceptionList` has `["UDM", "AUSF"]`, then SPNs created from profile level FQDNs of UDM and AUSF will have `"http"` as the scheme, and all other NF types will have `"https"` as the scheme. For more information about `defaultScheme` and `exceptionList`, see *"Global Parameters"* in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

#### Note

The default value in the Helm configuration indicates that the previously used value of `"http"` has been changed to `"https"`.

## Managing Alternate Routing based on the DNS SRV Records

### Enable

This feature is enabled by setting the `dnsSRVAlternateRouting` parameter to `true` in the `custom-values.yaml` file. For more information, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

**Note**

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

## Configure

You can configure the Alternate Routing based on the DNS SRV Records feature using Helm, REST API, and the CNC Console.

- **Configure using Helm:**
  - For information about configuring `defaultScheme` and `exceptionList`, see "Global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.
  - For information about configuring the `scpc-alternate-resolution` microservice parameters, see "scpc-alternate-resolution Parameter" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.
- **Configure using CNC Console:** For information about the **Routing Options** tab to enable alternate routing configuration and set alternate route modes, see [Configuring DNS SRV based Alternate Routing](#).
- **Configure using REST API:** For information about the `alternatenfgroup` parameter to manage the alternate NF group configuration data that is configured for the corresponding query parameters, see "Configuring Alternate NF Group" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

## Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

## Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.42 Support for Multiple Signaling Service IPs

In the previous release, SCP supported only one signaling IP from a given network. This IP was exposed to all NFs to establish 5G Service Based Interface (SBI) communications.

With the support for multiple signaling IPs, SCP can expose multiple signaling service IPs from the same or a different network to all NFs to accept 5G SBI signaling traffic (ingress connections).

**Note**

SCP supports 8 signaling IPs.

This feature provides the flexibility to achieve maximum redundancy in the IP path. 5G NFs can have more than one SCP's destination IPs for the transport network to select different paths for each of the IPs. Therefore, a single SCP instance is available through more than one IP path if one of the transport network paths fails.

Using this feature, you can do the following:

- Improve resiliency in 5G core network during transport failure by enabling multiple signaling paths.
- Create dedicated signaling service paths by configuring multiple service signaling IPs.

### Managing Multiple Signaling IPs

#### Enable

This feature is enabled automatically in SCP at the time of deployment.

#### Configure

The `serviceSpecifications` Helm parameter is introduced as part of this feature. To use this feature, complete the configuration as described in "Configuration Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

**Note**

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

To add or remove signaling services, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

#### Observe

For information about metrics, see [Metrics](#).

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.43 Egress Congestion Control Support at SCP

When Service Communication Proxy (SCP) receives a 5G Service Based Interface (SBI) message request from a consumer NF, SCP forwards the message request to a target producer NF. If the producer NF is overloaded, then SCP performs alternate routing to find another equivalent producer NF. In case no equivalent producer NF is available, then SCP sends an error response to the consumer NF with the configured error code. For more information about configuring error codes, see [Configuring SBI Message Priority and Error Profiles for Egress Congestion Control](#).

### Support for 3GPP SBI Message Priority

With the introduction of this feature, SCP uses the SBI message priority value present in the "3gpp-Sbi-Message-Priority" header to categorize a 5G SBI message request as high or low priority. The message request is prioritized based on the value of the "3gpp-Sbi-Message-Priority" header. By default, SCP considers 24 as the priority for the ingress message request if the message does not have the "3gpp-Sbi-Message-Priority" header. If the priority of the ingress message request is less than the value of the SBI Message Priority Discard From parameter, which is defined in [Configuring SBI Message Priority and Error Profiles for Egress Congestion Control](#), then these messages are considered as high priority messages.

When SCP receives a high priority message request and the target producer NF is overloaded, SCP performs alternate routing to find an equivalent producer NF. If no equivalent producer NF is available, then SCP forwards the high priority message to the same target producer NF that is overloaded.

When SCP receives a low priority message request, SCP forwards the message request to a target producer NF. If the producer NF is overloaded, then SCP performs alternate routing to find another equivalent producer NF. In case no equivalent producer NF is available, then SCP sends an error response to the consumer NF with the configured error code.

### Egress Congestion Control for Producer NF

The following subsections describe the egress congestion control for producer NFs.

#### Egress Congestion Control based on Busy Producer NF

SCP, based on the response status codes 503, 429, and 307 with the Retry-After header in the response, removes the producer NF from its routing list for a period specified in the Retry-After header. This behavior is applicable if the Retry-After header is present in the response.

#### Egress Congestion Control based on Reported Producer NF Service Load

The NRF reports the load of a producer NF through a notification. After detecting that the producer NF load is at or above the alternate routing onset threshold but below the throttle onset threshold, SCP attempts to alternate route message requests designated for the producer NFs to other NFs wherever possible.

If message requests cannot be alternate routed, they are routed to the producer NF. The behavior continues until the producer NF load reported decreases below the abatement threshold. If the load reported by the NF exceeds the throttle onset threshold, all requests are alternate routed wherever possible and if requests cannot be alternate routed, they are rejected with a configurable error response code. SCP supports a configurable error response code that is to be sent when requests are being throttled and cannot be alternate routed. The default code is 500. For more information on utilizing LCI for obtaining producer load, see [Load Control based on the Load Control Information Header](#).



**Note**

Currently, if load is not present at service level, it is not picked from the NF profile level.

**Egress Congestion Control for Reported Load of NextHop SCP or SEPP**

SCP protects the next-hop SCP or SEPP from congestion. SCP monitors the load reported by nexthop SCP or SEPP in the LCI header. When the load exceeds the threshold, congestion control steps are taken. Alternate routes or traffic throttling are utilized based on the request's priority.

**Managing Egress Congestion Control Support at SCP****Enable**

This feature is enabled automatically in SCP at the time of deployment.

**Configure**

You can configure this feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about SBI message priority and error profile configurations, see [Configuring SBI Message Priority and Error Profiles for Egress Congestion Control](#).
- **Configure using REST API:** For information about message priority discard threshold and error code configurations in the `nfServiceLoadBasedCongestionControl` parameter, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

**Observe**

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

**Maintain**

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.44 Support for Model D Indirect 5G SBI Communication with Delegated Discovery

5G Service Based Interface (SBI) communication models are used to establish connections among NFs and NF services. These communication models facilitate consumer NFs to route service requests to producer NFs either directly or indirectly through Service Communication Proxy (SCP). For more information about different communication models, such as Model A, Model B, Model C, and Model D, see 3GPP TS 23.501 version 16.6.0 Release 16.



Using the Model D Indirect 5G SBI Communication with Delegated Discovery feature, consumer NFs delegate the producer NF discovery procedure to SCP by adding discovery parameters to the service requests.

SCP performs NF discovery with NRF using the received discovery parameters. The NRF indicated in the `preferredNrfForOnDemandDiscovery` parameter is used for the discovery procedure, which specifies the NRF preferred by `scp-nrfproxy` for delegated discovery. When the indicated NRF is not available, SCP does alternate routing to the `NRFSet`, which has the `preferredNrfForOnDemandDiscovery` parameter.

When SCP receives service requests with NF discovery parameters by including "3gpp-Sbi-Discovery" headers for the target producer NF selection, then SCP:

- extracts "3gpp-Sbi-Discovery" headers from the ingress service requests and initiates the discovery procedure based on these headers. For more information about the "3gpp-Sbi-Discovery" header, see 3GPP TS 29.500 version 16.6.0.
- selects the producer NF instance from the discovery response based on priority and capacity.
- stores NF discovery responses using the cache-control directives from NRF in NF discovery response messages.
- removes all "3gpp-Sbi-Discovery" headers from the service requests and forwards the service requests to the selected target producer NF. In case of inter-SCP routing, SCP forwards all the "3gpp-Sbi-Discovery" headers to the next hop SCP.
- reselects with the use of the discovery headers and results from delegated discovery responses are used to do initial selection and reselection.

#### Note

SCP is not expected to receive a discovery response from NRF containing both LOCAL and FOREIGN NF profiles. All NF profiles in a discovery response should be either FOREIGN or LOCAL. FOREIGN NF profiles' locality is not in SCP's serving localities list, allowing inter-SCP routing. LOCAL NF profiles' locality is within the SCP's serving localities list, enabling direct routing to producer NFs.

### Service Specific Discovery Request in Model D

The Model D discovery request that SCP sends to NRF has the `3gpp-sbi-discovery-service-names` header. The path URI of the ingress message is used to extract the service name, such as `nudm_uecm`. As a result, the rule creating takes less time since SCP just needs to parse a smaller NF profile. The NF profile returned by NRF contains the requested NF service-specific information only.

### NF Selection based on Preferred Locality

A consumer NF selects the target producer NF closest to it by setting the preferred locality to the value of the locality of the producer NF. When the preferred locality query parameter is present in the NF discovery service request, NRF prefers NF profiles with a locality attribute that matches the preferred locality. NRF returns additional NFs in the response that does not match the preferred target NF location. NRF sets a lower priority for any additional NFs on the response that does not match the preferred target NF location than those matching the preferred target NF location.

SCP configures preferred locality query parameters based on the received "3gpp-Sbi-Discovery-preferred-locality" header in the service request. SCP assigns its own locality as a

preferred-locality for NF discovery if the `assignPreferredLocality` parameter is enabled and the "3gpp-Sbi-Discovery-preferred-locality" header is absent in ingress service requests. SCP overrides the "3gpp-Sbi-Discovery-preferred-locality" header received in the service request and uses its own locality as preferred locality for NF discovery if the `overridePreferredLocality` parameter is enabled and the "3gpp-Sbi-Discovery-preferred-locality" header is present in ingress service requests. SCP controls the forwarding of assigned or overridden value of "3gpp-Sbi-Discovery-preferred-locality" headers to next hop SCP.

Model D Indirect 5G SBI Communication supports the following routing functionalities as described in [Support for Model C Indirect 5G SBI Communication](#) :

- Binding Headers
- Load Balancing and Alternate Routing
- Reverse Lookup

### Load Balancing Support for Delegated Discovery

Users can change the preferred NRF instance ID or NRF Set ID for delegated discovery at runtime using the REST API. If only NRF `nfSetId` is configured, then SCP does load balancing for the matching NRFs selected by `nfSetId`. For more information, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Managing Model D Indirect 5G SBI Communication

#### Enable

You can enable the Model D feature by setting `modeld_routing` to `true`. For more information, see [Configuring SCP Features](#).

#### Note

You can enable this feature if SCP is deployed with Release 16.

#### Configure

You can configure this feature using Helm, REST API, and the CNC Console.

- **Configure using Helm:** For information about configuring the `scp-nrfproxy` microservice parameters, `nrfProxyService`, and `nrfProfiles.customInfo.preferredNrfForOnDemandDiscovery`, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

#### Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

- **Configure using CNC Console:** For information about configuring this feature, see:
  - [Configuring SCP Features](#) to enable the feature and cache discovery responses.
  - [Configuring Global Options](#) to verify the **Forward Nf Discovery Headers** status.
  - [Configuring Routing Options](#) to manage the "3gpp-Sbi-Discovery-preferred-locality" header.

- **Configure using REST API:** For information about the REST API configurations, see "Configuring System Options" and "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

For information about metrics, see [Metrics](#).

### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.44.1 Managing Delegated Discovery Response Caching Based on Discovery Query Parameters

In Model D, the responsibility of NF discovery has been delegated to the Service Communication Proxy (SCP). When Model D cache is enabled at SCP, SCP caches all the NF discovery responses received from NRF. These cached responses are then used for further Model D delegated discovery service requests, where applicable.

Currently, when caching is enabled at SCP, all NF discovery responses received from NRF are cached by SCP. The service request often contains query parameters that change frequently, such as subscriber IDs, for example, Subscription Permanent Identifier (SUPI), Global Permanent Subscriber Identity (GPSI), and so on. This dynamic nature of query parameters may prevent the reuse of cached responses at SCP. Since SCP maintains a defined cache size, frequent cache filling could lead to inefficient utilization of the discovery response cache.

With this feature enhancement, SCP can do selective caching of the discovery responses based on the user-configurable discovery query parameter list, which will be avoided or ignored for discovery response caching at SCP. Thus, the selective caching control helps the user reduce the risk of cache overflow. This caching mechanism helps to optimize the performance while reducing latency.

### Managing Delegated Discovery Response Caching

#### Prerequisite

This feature will be enabled if Model D feature and caching in Model D are both enabled.

#### Enable

You can enable the Managing Delegated Discovery Response Caching Based on Query Parameters feature by setting `modeld_routing` to true and `Caching` is set to true to enable caching to store discovery responses. For more information, see [Support for Model D Indirect 5G SBI Communication with Delegated Discovery](#).

#### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see

- [Get NF Discovery Response Cache Configuration Data](#)
- [Configuring NF Delegated Discovery Response Cache](#)
- **Configure using REST API:** For information about configuring REST APIs, see the "Discovery Cache Response Configuration" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_ondemand_discovery_response_cache_skipped_total`
- `ocscp_worker_ondemand_discovery_response_cache_added_total`
- `ocscp_worker_ondemand_discovery_response_cache_removed_total`
- `ocscp_nrfproxy_ondemand_discovery_response_cache_skipped_total`
- `ocscp_nrfproxy_ondemand_discovery_response_cache_added_total`
- `ocscp_nrfproxy_ondemand_discovery_response_cache_removed_total`

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.44.2 NF Discovery Response Cache Update Based on the Received Notifications

The current SCP Model D discovery response cache functionality helps reduce latency, network bandwidth usage, and overall load on the NRF. However, the refresh of these cache records depends on the validity time value received in the discovery response. A Notification update or Deregister event for an NF may cause records containing the same NF to become outdated. Without timely cache updates, SCP may rely on outdated information, potentially leading to incorrect or inefficient routing decisions.

The NF Discovery Response Cache Update enhancement allows SCP to automatically update its Model D discovery response cache or invalidate the relevant cache based on real-time notifications from the NRF whenever there are changes or updates to NF profile information. In the case of record invalidation, SCP will initiate a discovery request to the NRF upon receiving a new request with the same query parameters. This ensures that SCP always works with the most current data, preventing issues related to outdated cache entries.

The following benefits highlight how this feature enhances system performance:

- **Reduced Latency and Network Bandwidth:** By ensuring the discovery cache is always up-to-date, this feature minimizes the need for redundant discovery operations, resulting in faster communication responses.

- **Reduced NRF Discovery Traffic:** With the cache being frequently updated based on NRF notifications, unnecessary discovery requests to the NRF are minimized, leading to lower overall traffic.
- **Improved Processing Time at SCP:** Real-time updates to the discovery response cache prevent delays caused by outdated information, allowing for faster processing within SCP.
- **Prevent Improper SBI Routing:** This feature ensures that the correct and most current NF profile data is always used, avoiding errors in Service-Based Interface (SBI) routing decisions.

#### Attributes for Cache Refresh and Invalidation

The following table lists the NF profile parameters that trigger cache refresh and those that trigger cache invalidation:

**Table 3-46 NF Profile Attributes for Cache Management**

| Attribute Name (as per 3GPP 29.510) | Impact on NF Profile and SCP Routing Consideration | Impact on NF Discovery Response and NRF Refresh                                                                      |
|-------------------------------------|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| nfInstanceId                        | NA                                                 | NA                                                                                                                   |
| nfType                              | NA                                                 | NA                                                                                                                   |
| nfStatus                            | Yes                                                | No                                                                                                                   |
| nfInstanceName                      | NA                                                 | NA                                                                                                                   |
| heartBeatTimer                      | NA                                                 | NA                                                                                                                   |
| plmnList                            | No                                                 | Yes                                                                                                                  |
| snpnList                            | No                                                 | Yes                                                                                                                  |
| sNssais                             | No                                                 | Yes                                                                                                                  |
| perPlmnSnssaiList                   | No                                                 | Yes                                                                                                                  |
| nsiList                             | No                                                 | Yes                                                                                                                  |
| fqdn                                | Yes                                                | No<br>If the discovery header, 3gpp-sbi-discovery-target-nf-fqdn, is present in the request, it will be invalidated. |
| interPlmnFqdn                       | Yes                                                | No                                                                                                                   |
| ipv4Addresses                       | Yes                                                | No                                                                                                                   |
| ipv6Addresses                       | Yes                                                | No                                                                                                                   |
| allowedPlmns                        | No                                                 | Yes                                                                                                                  |
| allowedSnpns                        | No                                                 | Yes                                                                                                                  |
| allowedNfTypes                      | No                                                 | Yes                                                                                                                  |
| allowedNfDomains                    | No                                                 | Yes                                                                                                                  |
| allowedNssais                       | No                                                 | Yes                                                                                                                  |
| priority                            | No                                                 | Yes<br>SCP must contact NRF to obtain the updated prioritized list of NFs.                                           |
| capacity                            | Yes                                                | No                                                                                                                   |
| load                                | Yes                                                | No                                                                                                                   |
| loadTimeStamp                       | Yes                                                | No                                                                                                                   |
| locality                            | No                                                 | Yes                                                                                                                  |
| udrInfo                             | No                                                 | Yes                                                                                                                  |
| udrInfoList                         | No                                                 | Yes                                                                                                                  |
| udmInfo                             | No                                                 | Yes                                                                                                                  |

**Table 3-46 (Cont.) NF Profile Attributes for Cache Management**

| Attribute Name (as per 3GPP 29.510) | Impact on NF Profile and SCP Routing Consideration | Impact on NF Discovery Response and NRF Refresh |
|-------------------------------------|----------------------------------------------------|-------------------------------------------------|
| udmInfoList                         | No                                                 | Yes                                             |
| ausfInfo                            | No                                                 | Yes                                             |
| ausfInfoList                        | No                                                 | Yes                                             |
| amfInfo                             | No                                                 | Yes                                             |
| amfInfoList                         | No                                                 | Yes                                             |
| smfInfo                             | No                                                 | Yes                                             |
| smfInfoList                         | No                                                 | Yes                                             |
| upfInfo                             | No                                                 | Yes                                             |
| upfInfoList                         | No                                                 | Yes                                             |
| pcfInfo                             | No                                                 | Yes                                             |
| pcfInfoList                         | No                                                 | Yes                                             |
| bsfInfo                             | No                                                 | Yes                                             |
| bsfInfoList                         | No                                                 | Yes                                             |
| chfInfo                             | No                                                 | Yes                                             |
| chfInfoList                         | No                                                 | Yes                                             |
| nefInfo                             | No                                                 | Yes                                             |
| nrfInfo                             | No                                                 | Yes                                             |
| udsfInfo                            | No                                                 | Yes                                             |
| udsfInfoList                        | No                                                 | Yes                                             |
| nwdafInfo                           | No                                                 | Yes                                             |
| pcscfInfoList                       | No                                                 | Yes                                             |
| hssInfoList                         | No                                                 | Yes                                             |
| customInfo                          | NA                                                 | NA                                              |
| recoveryTime                        | NA                                                 | NA                                              |
| nfServicePersistence                | NA                                                 | NA                                              |
| nfServices                          | Refer <a href="#">NF Service Table</a>             | Refer <a href="#">NF Service Table</a>          |
| nfServiceList                       | Refer <a href="#">NF Service Table</a>             | Refer <a href="#">NF Service Table</a>          |
| nfProfile Changes Support Ind       | NA                                                 | NA                                              |
| nfProfile Changes Ind               | NA                                                 | NA                                              |
| default Notification Subscriptions  | No                                                 | Yes                                             |
| lmfInfo                             | No                                                 | Yes                                             |
| gmlcInfo                            | No                                                 | Yes                                             |
| nfSetIdList                         | No                                                 | Yes                                             |
| servingScope                        | No                                                 | Yes                                             |
| lcHSupportInd                       | Yes                                                | No                                              |
| olcHSupportInd                      | Yes                                                | No                                              |
| NF Set Recovery Time List           | NA                                                 | NA                                              |
| Service Set Recovery Time List      | NA                                                 | NA                                              |
| scpDomains                          | Not supported in ocscf                             | Not supported in ocscf                          |
| scpInfo                             | Yes<br>Update the inter-SCP routing rules          | No                                              |

**Table 3-47 NF Service Attributes for Cache Management**

| Attribute Name (as per 3GPP 29.510) | Impact on NF Profile and SCP Routing Consideration | Impact on NF Discovery Response and NRF Refresh                                                                      |
|-------------------------------------|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| serviceInstanceId                   | NA                                                 | Yes                                                                                                                  |
| serviceName                         | NA                                                 | NA                                                                                                                   |
| versions                            | No                                                 | Yes                                                                                                                  |
| scheme                              | Yes                                                | No                                                                                                                   |
| nfServiceStatus                     | Yes                                                | No                                                                                                                   |
| fqdn                                | Yes                                                | No<br>If the discovery header, 3gpp-sbi-discovery-target-nf-fqdn, is present in the request, it will be invalidated. |
| interPlmnFqdn                       | Yes                                                | No                                                                                                                   |
| ipEndpoints                         | Yes                                                | No                                                                                                                   |
| apiPrefix                           | Yes                                                | No                                                                                                                   |
| default Notification Subscriptions  | No                                                 | Yes                                                                                                                  |
| allowedPlmns                        | No                                                 | Yes                                                                                                                  |
| allowedSnpsns                       | No                                                 | Yes                                                                                                                  |
| allowedNfTypes                      | No                                                 | Yes                                                                                                                  |
| allowedNfDomains                    | No                                                 | Yes                                                                                                                  |
| allowedNssais                       | No                                                 | Yes                                                                                                                  |
| allowed Operations Per NfType       | No                                                 | Yes                                                                                                                  |
| allowed Operations Per NfInstance   | No                                                 | Yes                                                                                                                  |
| priority                            | No                                                 | Yes                                                                                                                  |
| capacity                            | Yes                                                | No                                                                                                                   |
| load                                | Yes                                                | No                                                                                                                   |
| loadTimeStamp                       | Yes                                                | No                                                                                                                   |
| recoveryTime                        | NA                                                 | NA                                                                                                                   |
| supportedFeatures                   | No                                                 | Yes                                                                                                                  |
| nfServiceSetIdList                  | No                                                 | Yes                                                                                                                  |
| sNssais                             | No                                                 | Yes                                                                                                                  |
| perPlmnSnssaiList                   | No                                                 | Yes                                                                                                                  |
| vendorId                            | NA                                                 | NA                                                                                                                   |
| supported Vendor Specific Features  | NA                                                 | NA                                                                                                                   |
| oauth2Required                      | Yes                                                | No                                                                                                                   |

**Note**

SCP performs NRF refresh when any service is added or removed from a profile.

**Managing NF Discovery Response Cache Update****Enable**

You can enable the NF Discovery Response Cache Update Based on the Received Notifications feature by setting both `modeld_routing` and `Caching` to true, and updating the `cacheUpdateMode` parameter. For more information, see [Configuring SCP Features](#).

## Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see the [Configuring Model D Indirect 5G SBI Communication feature](#) section.
- **Configure using REST API:** For information about configuring REST APIs, see the "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

## Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_nrfproxy_ondemand_discovery_cache_notif_local_refresh_total`
- `ocscp_nrfproxy_ondemand_discovery_cache_invalid_notif_nrf_refresh_total`
- `ocscp_worker_ondemand_discovery_cache_notif_local_refresh_total`
- `ocscp_worker_ondemand_discovery_cache_invalid_notif_nrf_refresh_total`
- `ocscp_nrfproxy_ondemand_discovery_cache_nrf_refreshed_status_total`
- `ocscp_worker_ondemand_discovery_cache_nrf_refreshed_status_total`

## Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:


1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.45 Support for 5G SBI Roaming

3GPP specifies Local Breakout (LBO) and Home Routing (HR) roaming architectures. SCP can be used for indirect communications such as Model C or Model D between NFs within Visited Public Land Mobile Network (VPLMN) or Home Public Land Mobile Network (HPLMN) or within both VPLMN and HPLMN.

The following image depicts the 5G system roaming architecture in the case of a home routed scenario with service-based interfaces within the Control Plane. For more information, see 3GPP TS 23.501 v16.6.0.

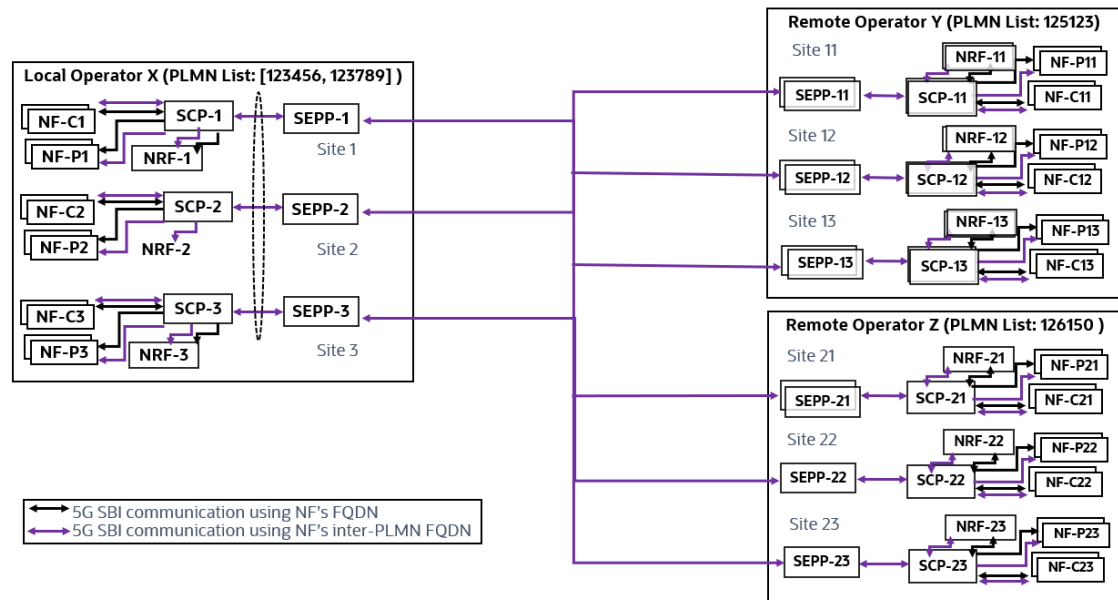

**Figure 3-13 Local and Remote Routing**

Local PLMN consumer NFs can be V-SMF, V-AMF, or V-PCF, and so on. Remote PLMN producer NFs can be H-SMF, H-UDM, or H-PCF, and so on.

This feature enables 5G SBI indirect communication for 5G SBI roaming signaling traffic, which includes roaming ingress traffic to local operator's network and egress traffic to remote operator's network.

The PLMN network ID for a mobile network identifies the roaming location uniquely. The ID contains Mobile Country Code (MCC) and Mobile Network Code (MNC) to identify a mobile network operator.

If an NF wants to be discovered by other NFs in a different PLMN, it registers inter PLMN FQDN in NRF. The format of inter PLMN FQDN is as follows:

<labels separated by dots>.5gc.mnc<MNC>.mcc<MCC>.3gppnetwork.org

Example of of Inter PLMN FQDN UDM belonging to PLMN MNC 12 and MCC 345:

udm.5gc.mnc012.mcc345.3gppnetwork.org

#### **Note**

Telescopic FQDN is not supported in this release.

Intra-PLMN (non-roaming) traffic is routed based on 5G NF topology determined from NRF using FQDN (local) present in NFs. 5G SBI roaming traffic received from SEPP, that is, ingress to local operator network site and with inter-PLMN or self constructed FQDN, is routed using inter-PLMN FQDN present in NFs.

If SCP receives a "3gpp-Sbi-Target-apiRoot" HTTP header in the ingress service request, it determines the target PLMN from the inter PLMN FQDN specified in this header. If the "3gpp-Sbi-Target-apiRoot" HTTP header is not present, SCP performs delegated discovery for NF selection based on the received "3gpp-Sbi-Discovery" headers.

To support the 5G SBI roaming subscriber inter-PLMN traffic routing for different remote PLMNs, SCP identifies whether the ingress 5G SBI service request is for local PLMN IDs or remote PLMN IDs. To differentiate between intra-PLMN and inter-PLMN service requests, SCP uses local supported PLMN IDs.

For a network, local supported PLMN IDs include SCP supported PLMN IDs. Other than locally supported PLMN IDs, all PLMN IDs are considered as remote PLMN IDs by SCP. A network consists of multiple PLMN IDs, and network deployment is based on PLMN IDs.

SCP determines the SEPP topology from NRF or locally configured SEPP profile at SCP. SCP selects a SEPP instance based on PLMN serving the target NF. SCP performs load balancing and alternate routing between SEPP instances based on priority and capacity available in the SEPP profile.

To use InterPLMN routing with Oracle NRF, you must enable the `scp_user_agent_info` REST API parameter to add the "User-Agent" header in the format starting with the keyword "SCP-" so that SCP originated messages towards NRF include the "User-Agent" header required by Oracle NRF.

## Managing Support for 5G SBI Roaming

### Enable

You can enable this feature by setting `interplmn_routing` to true. For more information, see [Configuring SCP Features](#).

### Configure

You can configure this feature using Helm, REST API, and the CNC Console.

- **Configure using Helm:** For information about Helm configurations, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

#### Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

- **Configure using CNC Console:** For information about configuring NF instance IDs, see [Configuring SEPP Inter PLMN Routing](#).
- **Configure using REST API:** For information about the REST API configurations, see "Configuring SCP Features" and "Configuring SEPP InterPlmn Info" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.46 Support for Alternate Routing Using Static Configuration

5G Service Based Interface (SBI) communication models establish connections among NFs and NF services. These communication models facilitate consumer NFs to route service requests to producer NFs directly or indirectly through Service Communication Proxy (SCP).

If the target producer NF is unavailable, SCP determines the NF Set ID of the target producer NF and performs alternate routing on the NF Set ID instances in a sequence until SCP completes all the configured routing attempts. In the absence of NF Set, SCP allows operators to configure FQDNs and use the Domain Name System (DNS) Service (SRV) method to find the equivalent NFs. In case the DNS SRV method is not availed by operators, then static configuration is used for alternate routing.

With the introduction of the static configuration, SCP allows operators to configure a pair or combination of primary NFs and their alternate NFs to define alternate producer NFs, which can be used in alternate NF selection when routing attempt to the primary NF fails.

The static alternate route feature prioritizes the settings in the static routing configuration over any NF profile for the alternate destination.

### Managing Support for Alternate Routing Using Static Configuration

#### Enable

By default, this feature is disabled. To enable alternate routing using static configuration, you must complete the configuration as described in the following configuration section.

#### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Routing Options](#) and [Configuring Route Groups](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring Route Groups" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.47 Support for Thread Watchdog

The Thread Watchdog feature enables SCP to monitor whether any SCP microservice threads are stuck or nonresponsive at regular intervals. If the thread watchdog reports any thread as nonresponsive or stuck, then the pod's liveness fails. If the pod's liveness failure count exceeds the failure threshold value, then the pod is restarted. If a thread doesn't respond within a specified duration, it is marked as nonresponsive or stuck. This time interval is configurable.

The failure threshold for the thread watchdog is also configurable. It determines how often the watchdog attempts to retry in case the watchdog detects a thread stuck or nonresponsiveness before declaring whether a thread is stuck or nonresponsive. Pod liveness fails when the watchdog failure count exceeds the configured threshold. These values are tuned and are not recommended to be changed.

### Managing Support for Thread Watchdog

#### Enable

This feature is enabled automatically in SCP at the time of deployment. To disable this feature, set the `enableThreadWatchDog` parameter to `false` as described in "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Configure

You can configure this feature using REST API parameters as described in "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. To view thread watchdog configurations on the CNC Console, see [Configuring SCP Services](#).

#### Observe

There is no specific metric and alert required for this feature.

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.48 Message Feed Enhancements

The Message Feed feature allows copying of both request and response messages routed through SCP toward Oracle Communications Network Analytics Data Director (OCNADD) based on the configuration at SCP. Along with request and response messages, metadata, as described in [Table 3-48](#), is also sent to OCNADD.

The Message Copy feature provides SSL and SASL as a security mechanism for encryption and authentication. SSL can be configured for encryption, and it also serves as two way authentication between the scp-worker and the Kafka broker. SASL can be configured to achieve authentication of connections to brokers from scp-worker. Configuration of both SSL

and SASL can be done on SCP with secret creation and specifying them under the `ddSslConfiguration` and `ddSaslConfiguration` sections of the SCP deployment file.

From SCP 23.4.1, SCP is enhanced to select Kafka partitions based on the `kafkaPartitionSelectionLogic` REST API configuration that provides the following methods to distribute the messages:

- **RoundRobin:** All the messages are distributed across all the available partitions in a round-robin order.
- **KeyBased:** Messages with the same correlation-id are routed to the same partition. This ensures the same transaction messages are routed to the same partition.  
For more information about `kafkaPartitionSelectionLogic`, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

OCNADD aggregates the data for monitoring and analytical purposes. For more information about OCNADD, see *Oracle Communications Network Analytics Data Director User Guide*.

The following table describes metadata sent to OCNADD:

**Table 3-48 Metadata Table**

| Metadata       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| correlation-id | Identifies transactions such as ingress downstream request, all corresponding upstream requests and responses, and downstream response.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| consumer-id    | <p>Indicates the 5G NF instance ID of the originator NF, which is retrieved from the User-Agent header in the received request message.</p> <p><b>Conditions:</b></p> <ul style="list-style-type: none"> <li>• For SCP initiated request and response messages, for example, delegated Discovery and OAuth access token requests, consumer-id metadata must be present, and the value should be the same as the feed-source-&gt;nf-instance-id metadata value.</li> </ul> <p><b>Note:</b> As this is an SCP instance-id, there should not be any dependency on the User-Agent header to retrieve the nf-instance-id information.</p> <ul style="list-style-type: none"> <li>• For consumer NF initiated messages, consumer-id metadata depends on the presence of the User-Agent header in the received service request. The recommended User-Agent header format is &lt;NF Type&gt;-&lt;NF Instance ID&gt; &lt;NF FQDN&gt;.</li> </ul> |
| producer-id    | Indicates the 5G NF instance ID of the destination NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| consumer-fqdn  | <p>Indicates FQDN of the originator NF, which is retrieved from the User-Agent header in the received request message.</p> <p><b>Conditions:</b></p> <ul style="list-style-type: none"> <li>• For SCP initiated request and response messages, for example, delegated Discovery and OAuth access token requests, consumer-fqdn metadata must be present, and the value should be the same as the feed-source-&gt;nf-fqdn metadata value.</li> </ul> <p><b>Note:</b> As this is an SCP FQDN, there should not be any dependency on the User-Agent header to retrieve the FQDN information.</p> <ul style="list-style-type: none"> <li>• For consumer NF initiated messages, consumer-id metadata depends on the presence of the User-Agent header in the received service request. The recommended User-Agent header format is &lt;NF Type&gt;-&lt;NF Instance ID&gt; &lt;NF FQDN&gt;.</li> </ul>                                        |
| producer-fqdn  | Indicates FQDN of the destination NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

Table 3-48 (Cont.) Metadata Table

| Metadata      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| hop-by-hop-id | <p>Uniquely identifies a request-response pairs within a transaction. The hop-by-hop-id uses a maximum substring length of 30 characters for the following fields as part of the identifier:</p> <ul style="list-style-type: none"> <li>• producerFqdn: Use the first 30 characters</li> <li>• consumerFqdn: Use the first 30 characters</li> <li>• podInstanceID: Use the last 30 characters</li> </ul> <p>The hop-by-hop-id uses the following format to identify request-response pairs:</p> <ul style="list-style-type: none"> <li>• Consumer NF to SCP or SCP to Consumer NF (RxRequest/TxResponse) <ul style="list-style-type: none"> <li>– When the consumer NF is specified in the request: <p><b>Format:</b></p> <p>&lt;First 30 characters of consumerFqdn&gt;_&lt;Last 30 characters of worker-pod-instance-Id&gt;</p> <p><b>Example:</b></p> <p>udm12.oracle.com_cp-scp-worker-56df9944b6-kxthp</p> </li> <li>– When the consumer NF is not specified: <p><b>Format:</b></p> <p>NA_&lt;Last 30 characters of worker-pod-instanceId&gt;</p> <p>Where, NA indicates the absence of a consumer NF FQDN in the request.</p> <p><b>Example:</b></p> <p>NA_cp-scp-worker-56df9944b6-kxthp</p> </li> </ul> </li> <li>• SCP to Producer NF or Producer NF to SCP (TxRequest/RxResponse): <p><b>Format:</b></p> <p>&lt;Last 30 characters of worker-pod-instance-Id&gt;_&lt;First 30 characters of producerFqdn&gt;_Suffix</p> <p>Where, Suffix indicates an incrementing integer that increases with each hop.</p> <p><b>Example:</b></p> <p>cp-scp-worker-56df9944b6-kxthp_udm1svc.scpsvc.svc.cluster.loc_2</p> </li> </ul> |

Table 3-48 (Cont.) Metadata Table

| Metadata          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| reroute-cause     | <p>Indicates the reroute cause.<br/>It contains one of the following parameters:</p> <ul style="list-style-type: none"> <li>• Circuit breaking: Indicates that a message is an alternate attempt due to circuit breaking functionality at SCP.</li> <li>• Outlier detection: Indicates that a message is an alternate attempt due to outlier detection functionality at SCP.</li> <li>• Egress-rate-limit: Indicates that a message is an alternate attempt due to egress rate limiting functionality at SCP</li> <li>• producer-nf-congestion: Indicates that a message is an alternate attempt due to producer NF congestion</li> <li>• Error received</li> <li>• Timeout</li> <li>• Not Applicable</li> </ul> |
| timestamp         | Indicates timestamp (in nanoseconds) when message is received or forwarded by SCP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| message-direction | <p>Indicates whether a message is an ingress message sent to SCP or an egress message forwarded by SCP.<br/>It can be indicated by putting the following traffic feed trigger point name:</p> <ul style="list-style-type: none"> <li>• RxRequest</li> <li>• TxRequest</li> <li>• RxResponse</li> <li>• TxResponse</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                     |
| feed-source       | <p>Indicates the source of this traffic feed.<br/>This contains the key-value of different identity of the node sending the traffic feed.</p> <ul style="list-style-type: none"> <li>• Feed-source</li> <li>• nf-type = SCP</li> <li>• nf-fqdn = SCP's FQDN</li> <li>• nf-instance-id = SCP's NF instance id</li> <li>• pod-instance-id = SCP-worker's pod instance id</li> </ul>                                                                                                                                                                                                                                                                                                                                |

Sample traffic feed generated by SCP:

```
{
  "version": "1.0.0",
  "metadata-list": {
    "correlation-id": "19645510-4698-4303-84f9-41c5414822e0",
    "consumer-id": "26740918-e9cd-0205-aada-71a76214d33c",
    "consumer-fqdn": "udm121.oracle.com",
    "producer-fqdn": "udm1svc.default.svc.cluster.local",
    "hop-by-hop-id": "1",
    "reroute-cause": "ErrorReceived",
    "timestamp": "1659959278583551367",
    "message-direction": "RESPONSE_EGRESS",
    "feed-source": {
      "nf-type": "SCP",
      "nf-fqdn": "ocscp-scp-worker.scpsvc.svc.cluster.local",
      "nf-instance-id": "6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e",
      "pod-instance-id": "ocscp-scp-worker-65df786b4d-qv7hs"
    }
  }
},
```

```

"header-list": {
  "server": [
    "SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"
  ],
  "content-type": [
    "application/problem+json"
  ]
},
"5g-sbi-message": "{\"title\":\"Service
Unavailable\", \"status\":\"503\", \"detail\":\"Service Unavailable:: Service
Unavailable\"}"
}

```

## Managing Message Copy

### Enable

By default, this feature is disabled. To enable this feature, you must complete the configuration as described in the following configuration section.

### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Features](#) and [Configuring Traffic Feed](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features", "Configuring Traffic Feed Data Director", and "Configuring Traffic Feed Trigger Point Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Observe

The following metrics are added in the [Metrics](#) section:

- ocscp\_metric\_trafficfeed\_attempted\_total
- ocscp\_metric\_trafficfeed\_failed\_total
- ocscp\_metric\_trafficfeed\_not\_attempted\_total
- ocscp\_metric\_trafficfeed\_partition\_unhealthy
- ocscp\_metric\_trafficfeed\_success\_total
- ocscp\_metric\_trafficfeed\_cluster\_unhealthy

The following alerts are added in the [Alerts](#) section:

- [SCPTrafficFeedSendFailed](#)
- [SCPTrafficFeedPartitionUnhealthy](#)
- [SCPTrafficFeedKafkaClusterUnhealthy](#)

### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.



2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.49 Observability Enhancements for SCP Inter-microservice Connectivity

In the previous releases, SCP microservices communicated with each other to perform various tasks, however, there was no mechanism to determine communication failures between any two SCP microservices.

This enhancement enables SCP to improve the SCP observability by introducing observability parameters to monitor inter-microservices communication failures.

SCP microservices communicate with each other through Hypertext Transfer Protocol (HTTP). To monitor any communication failure between SCP microservices, SCP observability services are enhanced with a new metric and an alert. This observability enhancement checks inter-microservice connectivity at regular intervals. If there is any communication failure, it raises an alert based on the threshold configurations. The alert is automatically cleared when the connection is restored.

### Managing Observability Enhancements for SCP Inter-microservice Connectivity

#### Enable

This enhancement is automatically enabled in SCP at the time of deployment.

#### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Services](#).
- **Configure using REST API:** For information about configuring using REST APIs, see "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

#### Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.50 Load Control based on the Load Control Information Header

In the previous release, SCP was only relying on the producer NF's load information obtained from Network Repository Function (NRF) through NF status notifications, as SCP has subscribed for load status with NRF. This process might delay the availability of the instantaneous load information value at SCP.

With the introduction of Load Control based on the Load Control Information (LCI) Header feature, SCP has enhanced the existing load control functionality by enabling a direct exchange of the load information between 5G NFs and SCP using the "3gpp-Sbi-Lci" HTTP header.

When Service Communication Proxy (SCP) receives a "3gpp-Sbi-Lci" HTTP header, SCP calculates the effective available capacity based on the load reported by the peer NFs in LCI header or NF status notification from NRF. When SCP receives a 5G Service Based Interface (SBI) message request from a consumer NF, SCP forwards the message request to a selected target NF based on the priority and effective available capacity. If the load of the producer NF is equal to or above the throttle onset threshold percent, SCP doesn't consider that producer NF for routing; instead, it goes for alternate routing options to other equivalent producer NFs.

SCP can also convey its own load control information to its peers so that the 5G NFs can take appropriate action based on its implementation. Thus, Load Control Information assists the receiver 5G NF in target NF reselection and load balancing.

#### Note

SCP supports the LCI header with scope at the NF-instance or NF-service-instance level.

## Managing Load Control based on the Load Control Information Header

### Enable

To enable the Load Control based on the Load Control Information Header feature, set the **lci** option to **true** on the CNC Console. For more information, see [Configuring SCP Features](#).

### Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using REST API:** For information about the REST API configurations, see "Configuring Load Control Information" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **Configure using CNC Console:** For information about configuring NF instance IDs, see [Configuring SCP Features](#).

### Observe

For information about metrics, see [Metrics](#).

### Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

## 3.51 Support for Three-site Georedundancy

Geographical Redundant (Georedundant) deployments ensure high availability and redundancy of NFs. SCP supports a three-site georedundancy deployment of cnDBTier to ensure service availability when one of the SCP sites is down.

When the primary SCP is available, NFs send service requests to the primary SCP. When SCP at the primary site is unavailable, NFs redirect service requests to the secondary SCP or tertiary SCP until the primary SCP's active status is restored.

The SCP database consists of the following:

- **Configuration Data:** The configuration data is exclusive for a given SCP instance. Therefore, an exclusive logical database is created and used by an SCP instance to store its configuration data. You can configure SCP instance specific configurations using RESTful config API exposed by SCPC-Configuration microservice through the CNC Console.
- **Routing Data:** This is the routing rules data that SCP determines from NRF in 5G Core network topology.
- **Status Data:** This data provides the status of upgrade or rollback.

In a three-site deployment, each SCP instance uses its database. The data gets replicated to all other sites of the cnDBTier cluster so that the data is available on all the cnDBTier cluster sites in case of a cnDBTier instance failure. SCP data gets replicated between the georedundant sites by using cnDBTier replication services. cnDBTier can be supported in the following modes:

- **Two-site cnDBTier georeplication mode:** The database backup from one of the sites can be used for fault recovery of SCP.
- **Three-site cnDBTier georeplication mode:** The database backup from one of the sites can be used for fault recovery of SCP.
- **One-site cnDBTier deployment mode:** The georeplication is unavailable.

For more information about database replication in a georedundant environment, see *Oracle Communications Cloud Native Core cnDBTier User Guide*.

## 3.52 Automated Test Suite Support

SCP provides Automated Test Suite (ATS) for validating the functionalities. ATS allows you to execute SCP test cases using an automated testing tool, and then compares the actual results with the expected or predicted results. In this process, there is no intervention from the user. For more information about installing and configuring ATS, see *Oracle Communications Cloud Native Core Automated Testing Suite Guide*.

# 4

## Configuring Service Communication Proxy using the CNC Console

This chapter provides information about how to configure and modify different services in Service Communication Proxy (SCP) using the Oracle Communications Cloud Native Configuration Console (CNC Console).

The REST API configurations can also be performed using the CNC Console.

### 4.1 Support for Multiclustert Deployment

The CNC Console supports both single and multiple cluster deployments.


In a single cluster deployment, the CNC Console can manage NFs and Oracle Communications Cloud Native Environment (OCCNE) common services deployed in the local Kubernetes clusters.

In a multiclustert deployment, the CNC Console can manage NFs and OCCNE common services deployed in the remote Kubernetes clusters. For more information about single and multiple cluster deployments, see *Oracle Communications Cloud Native Configuration Console Installation, Upgrade, and Fault Recovery Guide* .

With the support of multiclustert deployment, a single instance of the CNC Console can configure two or multiple instances of SCP deployments if both CNC Console and SCP instances are deployed in the same Kubernetes cluster with different namespaces.

The following image represents a Kubernetes cluster with one instance of CNC Console and two instances of SCP. The single instance of the CNC Console is configuring two instances of SCP with different namespaces.

**Figure 4-1 Support for Multiclustert Deployment**

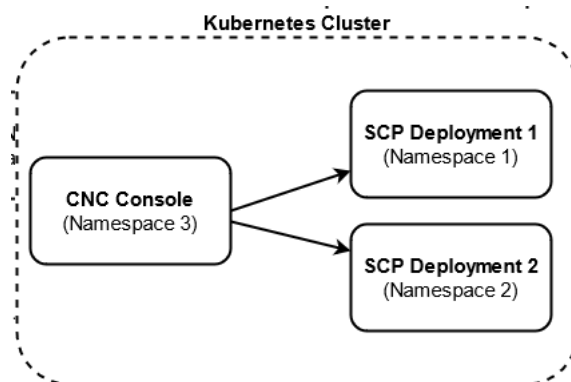

### 4.2 CNC Console Interface

This section provides an overview of the CNC Console to configure SCP features.

You can use SCP integrated with the CNC Console after logging in to CNC Console. To log in to the CNC Console, you must make the following updates to the hosts file at the C:\Windows\System32\drivers\etc location.

1. In the Windows system, open the hosts file in the notepad as an Administrator and append the following set of lines at the end:

```
<CNCC Node IP> cncc-iam-ingress-gateway.cncc.svc.cluster.local
<CNCC Node IP> cncc-core-ingress-gateway.cncc.svc.cluster.local
```

Example:

```
10.75.212.88 cncc-iam-ingress-gateway.cncc.svc.cluster.local
10.75.212.88 cncc-core-ingress-gateway.cncc.svc.cluster.local
```

#### Note

The IP Address in the above lines may change when deployment cluster changes.


2. Save and close the hosts file.  
Before logging in to the CNC Console, create a CNC user and password. Log in to the CNC Console using the same credentials. For information about creating a CNC Console user and password, see *Oracle Communications Cloud Native Configuration Console Installation, Upgrade, and Fault Recovery Guide*.

### Logging in to the CNC Console and Selecting an SCP Instance

Perform the following procedure to log in to the CNC Console and select the required SCP instance to configure SCP features.


1. Open any web browser.
2. Enter the URL: http://<host name>:<port number>.  
Where, <host name> is cncc-iam-ingress-ip and <port number> is cncc-iam-ingressport.
3. Enter the login credentials.
4. Click **Log in**.  
The CNC Console Home page appears.

**Figure 4-2 CNC Console Welcome Screen**

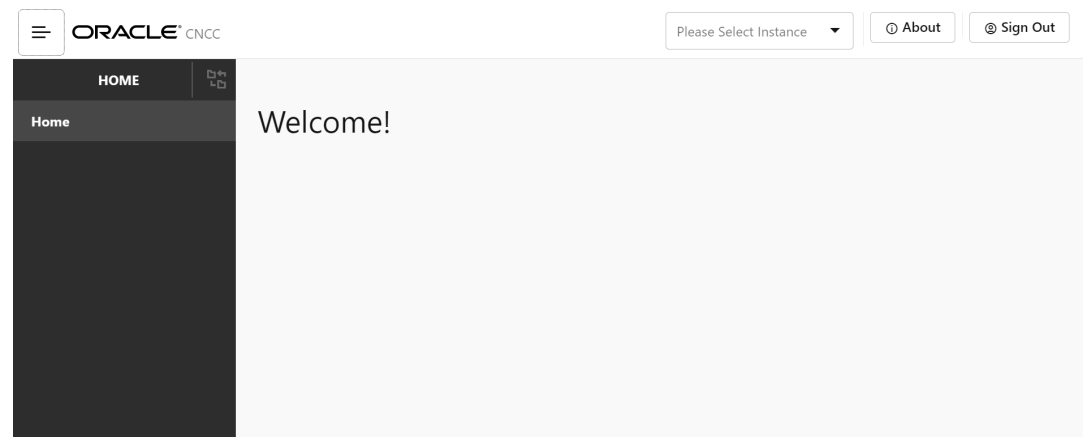

5. In the upper pane, from the **Please Select Instance** drop-down list, select the required SCP instance.  
The SCP tab appears in the left navigation pane.

**Figure 4-3 Select NF Instance**

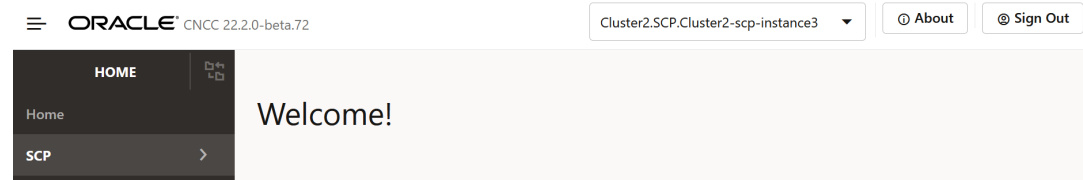

The **Please Select Instance** drop-down list provides NF instances to configure corresponding NF features. You must select an appropriate SCP instance to configure SCP features. Alternatively, you can click one of the following interface elements on the Welcome screen:

- **About:** This element provides the CNC Console product name and version.
- **Sign Out:** This element exits the CNC Console.

**Note**

In all the **Query Parameters** fields, do not enter keys or values in single or double quotes. For example, the "nfType"="UDM" query parameter must be entered as nfType=UDM.

## 4.2.1 Configuring SCP Features

This section provides information about enabling the following features of SCP:

**Note**

You must log in to the CNC Console while performing the procedures described in the subsequent subsections.

- Configuring Enhanced NF Status Processing
- Configuring Global Egress Rate Limiting
- Configuring Support for 5G SBI Roaming
- Configuring Mediation
- Configuring Model D Indirect 5G SBI Communication
- Configuring SCP User Agent Info
- Configuring Message Feed
- Configuring Load Control Information (LCI)
- Configuring Host Preference for Egress Message Requests
- Configuring CCA Header Validation

- Configuring Location Header Update for Host Mismatch
- Configuring Support for OAuth2.0
- Configuring SCP Health Check API
- NRF Configuration using DNS SRV Resolution
- Configuring Overload Control Based on the Overload Control Information Header
- Configuring Enhanced NFProfile Processing
- Configuring Error Response Enhancement
- Enhanced Notifications Handling
- Ingress Rate Limiting
- Egress Rate Limiting

### 4.2.1.1 Configuring the Log Enhancement Feature

Perform the following procedure to enable additional logging and subscriber ID in error logs.

1. From the left navigation pane, click the SCP tab, and then click the SCP Features tab.
2. To enable additional logging, from the SCP Features list, click the **Additional Logging** tab.
  - a. On the Additional Logging Feature page, click the **Edit** icon.

**Figure 4-4 Additional Logging Feature**

Edit Additional Logging Feature

Feature Name: additional\_logging

Enabled: ☐

▼ Feature Specific Config

▼ SCP Generated Error Response Logging

Enabled: ☐

SCP Service Names:

Save Cancel

- b. To enable additional logging and add additional log attributes to error logs, set the **Enabled** option to true for additional\_logging.

By default, the **Enabled** option is set to false.
- c. In the SCP Generated Error Logging section, set the **Enabled** option to true.

**Note**

Additional log attributes are appended to error response logs generated by SCP when the **Enabled** options of additional\_logging and SCP Generated Error Logging are set to true.

- d. Set the **SCP Service Name** field to one of the following options:
  - **scp-worker**: Adds additional logging attributes to SCP-Worker logs.

- **ALL**: Adds additional logging attributes to all services logs when SCP enhances this feature to support all microservices. In this release, it supports only SCP-Worker.

**Note**

- This field value cannot be null.
- Do not set this field to any other microservice when it is set to **ALL**.

- e. Click **Save**.
3. To enable log subscriber information, do the following:
  - a. From the SCP Features list, click the **Log Subscriber Info** tab.
  - b. On the Log Subscriber Info Feature page, click the **Edit** icon.

**Figure 4-5 Log Subscriber Info Feature**

**Edit Log Subscriber Info Feature**

Feature Name: log\_subscriber\_info

Enabled: ☐

▼ **Feature Specific Config**

SCP Service Names: ALL x

- scp-worker
- scp-nrfproxy
- scp-nrfproxy-oauth

- c. To enable log subscriber info and add subscriber ID to error logs, set the **Enabled** option to true for log\_subscriber\_info. By default, the **Enabled** option is set to false.
- d. Set the **SCP Service Name** field to **ALL** or to any one or combinations of the following options:
  - **scp-worker**: Adds subscriber ID to SCP-Worker logs.
  - **scp-nrfproxy**: Adds subscriber ID to SCP-nrfProxy logs.
  - **scp-nrfproxy-oauth**: Adds subscriber ID to SCP-nrfproxy-oauth logs.



**Note**

- This field value cannot be null.
- Do not set this field to any other microservice when it is set to **ALL**.

4. Click **Save**.

### 4.2.1.2 Configuring Error Response Enhancement

Perform the following procedure to enable or disable the Error Response Enhancement feature.

1. From the left navigation pane, click the SCP tab, and then click the SCP Features tab.
2. From the SCP Features list, click the Enhanced Error Response tab.
3. On the Enhanced Error Response page, click the **Edit** icon.

By default, the **Enabled** option is set to false for enhanced\_error\_rsp. If this option is set to true, SCP combines all the error responses from both internal and external sources.

**Figure 4-6 Error Response Enhancement**

| Feature Name       | Enabled |
|--------------------|---------|
| enhanced_error_rsp | true    |

Feature Name: enhanced\_error\_rsp

Enabled: true

Feature Specific Config

Problem Details Enhancement

Error Detail Max Size: 2100

4. In the **Error Detail Max Size**, set the limit of the error string.

This field manages the maximum length limit of the compiled error string in the detail parameter of problemDetails as described in "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. SCP truncates the error string from end if the compiled string is greater than the maximum limit. The default value is 2100.

5. Click **Save**.

### 4.2.1.3 Configuring Enhanced NF Status Processing

Perform the following procedure to enable the support for creating or retaining SCP routing rules for NF Profiles with NF Status as SUSPENDED.

**Note**

The Enhanced NF Status Processing feature is applicable only when nnrf-nfm (NRF Management) service is used as an audit service for SCP.

1. In the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP Features list, click **Enhanced Nf Status Processing**.
3. In the Enhanced NF Status section, click **Edit**.

**Figure 4-7 Editing Enhanced Nf Status Processing**

The screenshot displays the 'Enhanced NF Status' configuration interface. It includes a header 'Enhanced NF Status' and a form with the following fields:

| Field Label                       | Value                         |
|-----------------------------------|-------------------------------|
| Feature Name:                     | enhanced_nf_status_processing |
| Enabled:                          | false                         |
| <b>Feature Specific Config</b>    |                               |
| Enhanced Suspended State Routing: | UDM                           |
| Suspended State Routing:          | PCF                           |

4. Set **Enabled** to true.  
By default, this option is set to false.
5. In the **Feature Specific Config** section, configure the following fields as required:
  - **Enhanced Suspended State Routing:** Enter the list of valid NF types for Mode 3 routing.
  - **Suspended State Routing:** Enter the list of valid NF types for Mode 2 routing.
6. Click **Save**.

#### 4.2.1.4 Configuring Global Egress Rate Limiting

Perform the following procedure to configure global egress rate limiting.

1. In the left navigation pane, click the **Global Egress Rate Limiting** tab.
2. In the Global Egress Rate Limit section, click **Edit**.  
The Edit Global Egress Rate Limit screen appears.

Figure 4-8 Enabling the Global Egress Rate Limiting

## Edit Global Egress Rate Limit

|                      |                                         |
|----------------------|-----------------------------------------|
| <b>Feature Name:</b> | Feature Name<br>global_egress_ratelimit |
| <b>Enabled:</b>      | <input type="checkbox"/>                |

**Feature Specific Config**

|                               |                                |
|-------------------------------|--------------------------------|
| <b>Remote ScpOne Enabled:</b> | Remote ScpOne Enabled<br>false |
| <b>Remote ScpTwo Enabled:</b> | Remote ScpTwo Enabled<br>false |

- Set **Enabled** to true.  
By default, this option is set to false.
- In the Feature Specific Config section, configure the following fields:
  - Remote ScpOne Enabled:** Set this field to true if you want to enable egress rate aggregation with the SCP instance as defined in the `coherence.federation.remoteScpOne` parameter of the `ocscp-custom-values.yaml` file. By default, this value is set to false.
  - Remote ScpTwo Enabled:** Set this field to true if you want to enable egress rate aggregation with the SCP instance as defined in the `coherence.federation.remoteScpTwo` parameter of the `ocscp-custom-values.yaml` file. By default, this value is set to false.
- Click **Save**.

### 4.2.1.5 Configuring Support for 5G SBI Roaming

Perform the following procedure to configure support for 5G SBI roaming.

#### Note

Ensure that one local and one remote PLMNs are configured before enabling this feature. To configure a remote PLMN, see [Configuring SEPP Inter PLMN Routing](#). A local PLMN is configured at the time of SCP deployment or by editing the **CUSTOM\_ORACLE\_SCP** NF type as described in [Configuring NF Rule Profile](#).

1. In the left navigation pane, click the **Interplmn Routing** tab.
2. In the Interplmn Routing section, click **Edit**.  
The Edit Interplmn Routing screen appears.

**Figure 4-9 Inter PLMN Routing**

Feature Name: interplmn\_routing

Enabled: ☐

Save Cancel

3. Set **Enabled** to true.  
By default, this option is set to false.
4. Click **Save**.

### 4.2.1.6 Configuring Mediation

Perform the following to configure mediation.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. To enable mediation, from the SCP Features list, click the **Mediation** tab.
3. In the Mediation section, click **Edit**.  
The Edit Mediation screen appears.

**Figure 4-10 Enable Mediation**

Mediation

Feature Name: mediation

Enabled: ☐

Feature Specific Config

User Defined Variable

Enabled: ☐

Max User Defined Variable Size: 1024

Max User Defined Variable Count: 100

createdTimestamp: 2024-12-02 06:16:27.0

updatedTimestamp: 2024-12-02 06:16:27.0

4. Set **Enabled** to true.  
By default, this option is set to false.
5. In the Feature Specific Config section, configure the following fields:
  - Set the **Enabled** true for enabling the User Defined Variable feature.

**Note**

If the User Defined Variable feature is enabled and any mediation rules are in the Applied state, the enabled field cannot be set back to false until all Applied rules are returned to DRAFT state.

- Set the **maxUserDefinedVariableSize** field to define the overall max size of all user defined variables included in the request or response body for mediation.
  - Default Value: 1024
  - Range: 512 - 4096
- Set the **maxUserDefinedVariableCount** field to define the total number of user defined variables that can be configured for usage at User Defined Variables API.
  - Default Value: 100
  - Range: 1-250

**Note**

If userDefinedVariables are added through the User Defined Variables API, the maxUserDefinedVariableCount cannot be set to a value lower than the number of userDefinedVariables currently stored in the database.

- Click **Save**.

### 4.2.1.7 Configuring Model D Indirect 5G SBI Communication feature

Perform the following to configure Model D indirect 5G SBI communication feature.

- In the left navigation pane, click the **Modeld Routing** tab.
- In the Modeld Routing section, click **Edit**.

**Figure 4-11 Enabling ModelD Routing**

The screenshot shows the Oracle CNC Console interface for the 'ModelD Routing' feature. The left sidebar contains a navigation menu with items like 'Global Egress RateLimit', 'Health Check', 'Interplmn Routing', 'LCI', 'Location Header Update F...', 'Log Subscriber Info', 'Mediation', 'Modeld Routing' (selected), 'OAuth2 Support', 'OCI', 'SCP User Agent Info', 'Traffic Feed', and 'NRF Bootstrap Info'. The main content area is titled 'ModelD Routing' and includes an 'Edit' button and a 'Refresh' button. The configuration details are as follows:

|                                          |                           |
|------------------------------------------|---------------------------|
| Feature Name:                            | modeld_routing            |
| Enabled:                                 | false                     |
| <b>Feature Specific Config</b>           |                           |
| Caching:                                 | true                      |
| enforceReqSpecificSvcDiscovery:          | true                      |
| <b>Cache Config For NRF Notification</b> |                           |
| cacheUpdateMode:                         | LOCAL_REFRESH,NRF_REFRESH |
| useCachedRecordOnError:                  | 307,308,429,5xx,empty2xx  |
| createdTimestamp:                        | 2024-08-21 15:26:07.0     |
| updatedTimestamp:                        | 2024-08-21 15:26:07.0     |

The Edit Modeld Routing screen appears.

3. Set **Enabled** to true.  
By default, this option is set to false.
4. Set **Caching** to true or false to enable or disable caching to store discovery responses. By default, this option is set to true.
5. Set **enforceReqSpecificSvcDiscovery** to true or false to enable or disable NF Service specific Discovery Requests when possible. By default, this option is set to true.
6. In the **Cache Config For NRF Notification** section, configure the **cacheUpdateMode** and **useCachedRecordOnError** fields accordingly:  
**cacheCfgForNrfNotification**: Configuration for model-based D cache updates using NRF information.

It includes two fields: **cacheUpdateMode** and **useCachedRecordOnError**.

- **cacheUpdateMode** field is a list with three possible values:
  - **NONE**: No cache update will occur, and the notification will be ignored. Setting the value to "NONE" disables this feature.
  - **LOCAL\_REFRESH**: The cache is updated locally if the NF-profile attribute being modified belongs to the local cache update category. If **cacheUpdateMode** is set to **LOCAL\_REFRESH** only and the modified attribute requires an NRF discovery update, the notification is ignored.
  - **NRF\_REFRESH**: The cache is refreshed through a new discovery request to NRF if the NF-profile attribute being modified requires an NRF discovery update. If **cacheUpdateMode** is set to **NRF\_REFRESH** only and the modified attribute requires a local update, the notification is ignored.
- **useCachedRecordOnError** field indicates that SCP uses the existing invalid cached response for the defined error codes if it receives an error response from NRF, if the request times out, or if it receives a 2xx response with no profiles.
  - **Allowed values**: NONE, 5xx, empty2xx, and any valid reroutable error codes defined in the Routing Options section. These include: 301, 302, 303, 304, 307, 308, 400, 401, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 421, 422, 425, 426, 428, 429, 431, 451, 500, 501, 502, 503, 504, 505, 506, 507, 508, 510, 511.
  - **Default values**: "307", "308", "429", "5xx", "empty2xx".
  - **NONE**: This value indicates that no error codes are configured. No other error codes can be used when "NONE" is set.
  - **5xx**: Indicates all supported error codes starting with 5.
  - **empty2xx**: This custom string is defined to handle cases where the NRF discovery response returns a 200 OK status with an empty list of profiles. If this value is configured, SCP will use the old invalid cached response.

7. Click **Save**.

### 4.2.1.8 Configuring SCP User Agent Info

Perform the following to configure SCP User Agent Info.

1. In the left navigation pane, click the **SCP User Agent Info** tab.
2. In the SCP User Agent Info section, click **Edit**.  
The SCP User Agent Info screen appears.

**Figure 4-12 SCP User Agent Info**

SCP User Agent Info

Feature Name: scp\_user\_agent\_info

Enabled: false

Feature Specific Config

User Agent Header Format: NFType-NFInstanceID FQDN

3. Set **Enabled** to true.  
By default, this option is set to false.
4. Expand the Feature Specific Config option, in the **User Agent Header Format** field, select the required format to set the "User-Agent" header format.  
For more information about the "User-Agent" header formats, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
5. Click **Save**.

### 4.2.1.9 Configuring Message Feed

Perform the following to configure message feed.

1. In the left navigation pane, click the **Traffic Feed** tab.
2. In the Traffic Feed section, click **Edit**.  
The Traffic Feed screen appears.

**Figure 4-13 Message Feed**

Traffic Feed

Feature Name: traffic\_feed

Enabled: false

3. Set **Enabled** to true.  
By default, this option is set to false.
4. Click **Save**.

### 4.2.1.10 Configuring Load Control Information (LCI)

Perform the following procedure to enable configuring load control information (LCI).

1. In the left navigation pane, click the **LCI** tab.
2. In the LCI section, click **Edit**.

**Figure 4-14 Editing LCI**

The screenshot shows the 'Edit LCI' configuration page. At the top, there's a 'Feature Name' field containing 'lci'. Below it is an 'Enabled' toggle switch. The main section is titled 'Feature Specific Config' and contains several configuration items, each with a label and a value field or toggle:

- SCP LCI Conveyance Enable:** A toggle switch.
- Relay Peer Lci:** A toggle switch.
- SCP LCI Conveyance Interval:** A text input field containing '3600'.
- SCP LCI Minimum Load Change:** A text input field containing '25'.
- SCP LCI Conveyance Minimum Load Threshold:** A text input field containing '25'.
- SCP LCI Conveyance to Unknown peer:** A toggle switch.
- Peer LCI Processing Minimum Load Change:** A text input field containing '25'.
- Unknown peer LCI Expiry time:** A text input field containing '900'.

At the bottom right, there are 'Save' and 'Cancel' buttons.

3. Set Enabled to true.  
By default, this option is set to false.
4. In the **Feature Specific Config** section, complete the following configurations:

**Note**

All the parameters are mandatory to configure the LCI feature.

- **SCP LCI Conveyance Enable:** Set to true to enable SCP to add its LCI in request and response.
- **Relay Peer Lci:** Set to true to allow SCP to forward the received LCI header from producer NF.
- **SCP LCI Conveyance Interval:** Enter a value from 100 milliseconds to 3600000 milliseconds to report the SCP LCI update interval.
- **SCP LCI Minimum Load Change:** Enter a value from 0 to 25 to report the minimum delta value when reporting LCI based on load change.
- **SCP LCI Conveyance Minimum Load Threshold:** Enter a value from 0 to 60 to set a minimum load change threshold to trigger the generation of an LCI header and its reporting to peers if allowed.

**Note**

If the SCP load value is less than the configured SCP LCI Conveyance Minimum Load Threshold value, SCP sends its load value as 0%.

- **SCP LCI Conveyance to Unknown peer:** Set to true to allow SCP to send its LCI to an unknown peer NF, a peer NF that is not registered with SCP.



**Note**

- SCP sends its LCI in all the messages that go to peer NFs that are not registered with SCP.
- If the SCP load value is less than the configured SCP LCI Conveyance Minimum Load Threshold value, SCP sends its load value as 0%.

- **Peer LCI Processing Minimum Load Change:** Enter a value from 0 to 25 to define a minimum load change threshold in peer NF's load as indicated in LCI, which can trigger a re-evaluation of routing rules.
- **Unknown peer LCI Expiry time:** Enter a value between 30 seconds to 900 second to set the minimum number of seconds required to remove an unknown peer's LCI from cache.

5. Click **Save**.

### 4.2.1.11 Configuring Host Preference for Egress Message Requests

Perform the following procedure to configure host preference for egress message requests.

1. In the left navigation pane, click the **Egress Host Preference** tab.
2. In the Egress Host Preference section, click **Edit**.

**Figure 4-15 Editing Egress Host Preference**

The screenshot displays the 'Editing Egress Host Preference' configuration page. It is divided into two main sections: 'Request' and 'Response'. The 'Request' section contains three dropdown menus: 'Api Root Header Present' (set to 'PASSTHROUGH'), 'Api Root Header Not Present' (set to 'IP'), and 'SCP Generated NRF Message' (set to 'IP'). The 'Response' section contains one dropdown menu: 'Headers' (set to 'FOLLOWREQUEST'). Below these sections is the 'Fqdn Resolution' section, which contains two dropdown menus: 'Fqdn' (set to 'NFPROFILE') and 'InterPlmn Fqdn' (set to 'DNS').

3. Set **Enabled** to true.  
By default, this option is set to false.
4. In the **Feature Specific Config** section, to configure the host preference, set the following fields as described in the following table:

Table 4-1 Host Preference

| Field Name                         | Description                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Api Root Header Present</b>     | This parameter indicates the host preference (":authority" header) for egress message requests if the 3gpp-Sbi-Target-apiRoot header is present in the ingress message request.<br>You can set this field to PASSTHROUGH to use the same type of host in egress message requests as received through ingress message requests.<br>Default value: PASSTHROUGH<br>Range: IP, FQDN, or PASSTHROUGH |
| <b>Api Root Header Not Present</b> | This parameter indicates the host preference (":authority" header) for egress message requests if the 3gpp-Sbi-Target-apiRoot header is absent in ingress message requests.<br>Default value: IP<br>Range: IP or FQDN                                                                                                                                                                           |
| <b>SCP Generated NRF Message</b>   | This parameter indicates the host preference (":authority" header) for SCP generated NRF messages.<br>Default value: IP<br>Range: IP or FQDN                                                                                                                                                                                                                                                    |
| <b>Fqdn</b>                        | This parameter indicates the resolution preference of egress message requests host FQDN if present.<br>Default value: NFPROFILE<br>Range: DNS or NFPROFILE                                                                                                                                                                                                                                      |
| <b>InterPlmn Fqdn</b>              | This parameter indicates the resolution preference of egress message requests inter-plmn FQDN if present.<br>Default value: DNS<br>Range: DNS or NFPROFILE                                                                                                                                                                                                                                      |

5. Click **Save**.

#### 4.2.1.12 Configuring CCA Header Validation

Perform the following option to configure CCA Header validation.

1. In the left navigation pane, click the **CCA Header Validation** tab.
2. In the CCA Header Validation section, click **Edit**.

Figure 4-16 Edit CCA Header Validation

Oracle CNC 23.2.0 Cluster1.SCP.Cluster1-scp-instance1 About Sign Out

CCA Header Validation Edit Refresh

Feature Name: cca\_header\_validation  
Enabled: false

Feature Specific Config

Validations:

| Type    | Error Profile Name   | Producer NFType |                 |
|---------|----------------------|-----------------|-----------------|
| subject | ccaVerificationError |                 | Add Edit Delete |

tls.crt.san

preferred\_validation\_order: URI-ID-URN,DNS-ID,IP-ADDRESS,URI-ID-APIROOT  
max\_entries\_to\_process: 30

- Set Enabled to true.  
By default, this option is set to false.

**Note**

SCP supports the 3gpp-Sbi-Client-Credentials header with x5c - X.509 URL, not x5u - X.509 URL.

- In the **Feature Specific Config** section, to configure the validations, set the following fields as described in the following table:

Table 4-2 Validations


| Field Name         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type               | <p>Type of validation:</p> <ul style="list-style-type: none"> <li>headerPresence: SCP checks the presence of the 3gpp-Sbi-Client-Credentials header in the ingress request. <ul style="list-style-type: none"> <li>Validation will pass if the header is present.</li> <li>Validation will fail if the header is not present.</li> </ul> </li> <li>subject: SCP checks the NF instance ID from the "sub" parameter in the 3gpp-Sbi-Client-Credentials header with the NF instance ID from the list of SANs in the client's TLS certificate. SANs directly have the NF Instance Id or the client's other identity, like the FQDN or IP address, which will be used to get the NF Instance Id. If the 3gpp-Sbi-Client-Credentials header is not present, then this validation will not be performed. <ul style="list-style-type: none"> <li>Validation will pass if the NF instance ID from the "sub" parameter matches the NF instance ID from the SAN.</li> <li>Validation will fail if the NF instance ID from the "sub" parameter doesn't match the NF instance ID from the SAN.</li> </ul> </li> </ul> |
| Error Profile Name | The error profile name is used to generate an error response if the corresponding validation fails. Error profiles can be configured using the REST API: /ocscp/scpc-configuration/{version}/errorProfileConfig.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Table 4-2 (Cont.) Validations

| Field Name                        | Description                                                                                                                                                                                                           |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product NF Type</b>            | Default Value: Null                                                                                                                                                                                                   |
| <b>preferred_validation_order</b> | An order format-wise from which the SCP picks SAN from the client's TLS certificate for verification of the "subject" type of validation.<br><b>Note:</b> Applicable only when validation type "subject" is selected. |
| <b>max_entries_to_process</b>     | Maximum number of SANs from the client's TLS certificate that SCP picks for validation.<br><b>Note:</b> Applicable only when validation type "subject" is selected.                                                   |

- Click **Add** to add validations:

Figure 4-17 Add Validations

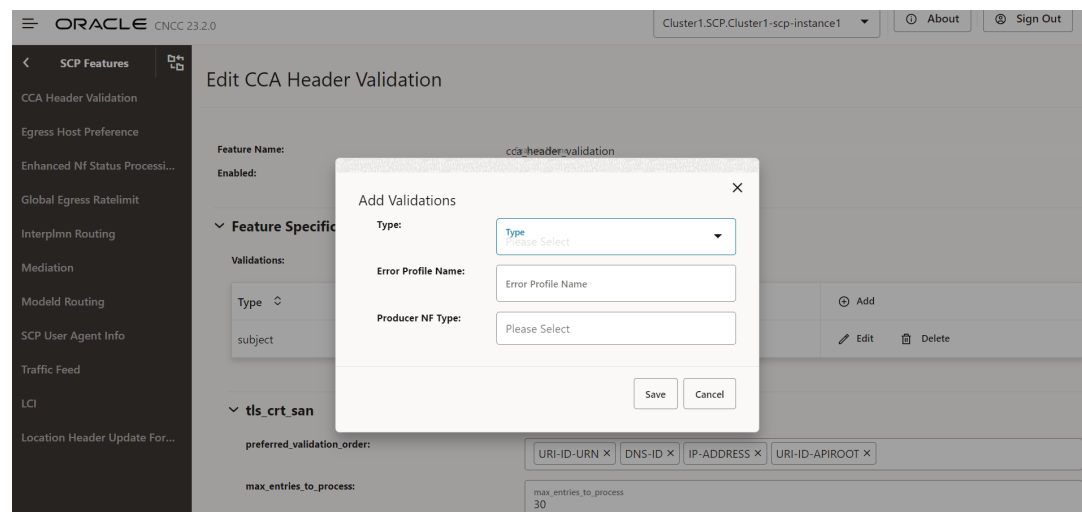


- Click **Save**.

#### 4.2.1.13 Configuring Location Header Update for Host Mismatch

Perform the following the procedure to configure location header update for host mismatch.

- In the left navigation pane, click the **Location Header Update For Host Mismatch** tab.
- In the Location Header Update For Host Mismatch section, click **Edit**.

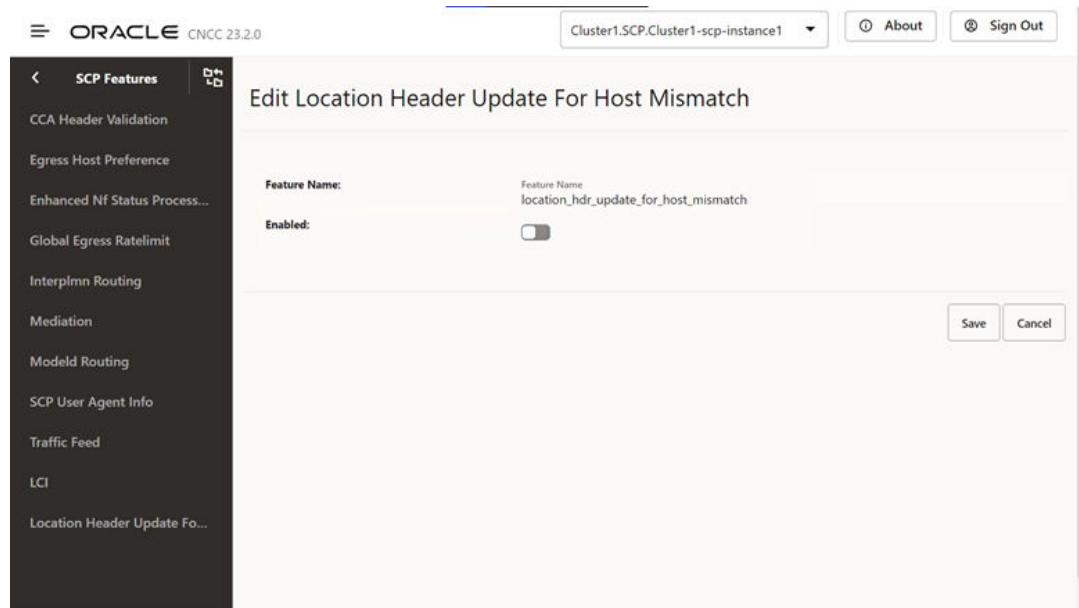**Figure 4-18 Edit Location Header Update For Host Mismatch**

3. Set Enabled to true.  
By default, this option is set to false.
4. Click **Save**.

#### 4.2.1.14 Configuring Support for OAuth2.0

Perform the following the procedure to configure support for OAuth2.0.

1. In the left navigation pane, click the **OAuth2 Support** tab.
2. In the OAuth2 Support section, click **Edit**.

Figure 4-19 OAuth2 Support

|                                    |                                   |
|------------------------------------|-----------------------------------|
| Feature Name:                      | Feature Name                      |
| Enabled:                           | <input type="checkbox"/>          |
| <b>Feature Specific Config</b>     |                                   |
| SCP Access Token Capability:       | SCP Access Token Capability       |
| Access Token Conveyance:           | <input type="checkbox"/>          |
| OAuth2 Access Token Validation:    | <input type="checkbox"/>          |
| Access Token Validation Types:     | Access Token Validation Types     |
| Access Token Refresh Guard Time:   | Access Token Refresh Guard Time   |
| Access Token Validity Guard Time:  | Access Token Validity Guard Time  |
| Access Token Clean Up Post Expiry: | Access Token Clean Up Post Expiry |
| Access Token History Size:         | Access Token History Size         |
| Access Token Cache Size:           | Access Token Cache Size           |
| Requester Info:                    | Requester Info                    |

- Set Enabled to true.  
By default, this option is set to false.
- In the **Feature Specific Config** section, complete the following configurations:

Table 4-3 Configure Access Token

| Field Name                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SCP Access Token Capability | <p>This field indicates Access token support for the listed indirect communication modes at SCP. (ENUM).</p> <p>Possible values: [INDIRECT_COM_WITH_DELEG_DISC, INDIRECT_COM_WITHOUT_DELEG_DISC]</p> <ul style="list-style-type: none"> <li>INDIRECT_COM_WITH_DELEG_DISC: SCP initiates access token request toward NRF in delegated discovery service request.</li> <li>INDIRECT_COM_WITHOUT_DELEG_DISC: SCP is expected to forward the service request with or without access token as per configuration at SCP. SCP is not expected to initiate access token request toward NRF.</li> </ul> |

Table 4-3 (Cont.) Configure Access Token

| Field Name                               | Description                                                                                                                                                                                                                                                                                                    |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Access Token Conveyance</b>           | This field conveys acquired access token in the "3gpp-Sbi-Access-Token" header in service response to consumer NFs. <ul style="list-style-type: none"> <li>Default value: true</li> <li>Range: true or false</li> </ul>                                                                                        |
| <b>OAuth2 Access Token Validation</b>    | This field enables or disables validation of OAuth2 access token from consumer NFs. <ul style="list-style-type: none"> <li>Default value: Disabled</li> <li>Range: Disabled or Enabled</li> </ul>                                                                                                              |
| <b>Access Token Validation Types</b>     | This field configures the list of required validation types in the network. <ul style="list-style-type: none"> <li>Default value: empty as default</li> <li>Range: Disabled or Enabled</li> </ul>                                                                                                              |
| <b>Access Token Refresh Guard Time</b>   | This field initiates proactive refresh of cached access token when the configured time expires. The proactive refresh occurs if the relevant SBI messages are in exchange. <ul style="list-style-type: none"> <li>Default value: 60000ms</li> <li>Range: 100ms - 300000ms</li> </ul>                           |
| <b>Access Token Validity Guard Time</b>  | This field indicates the time before the access token expiry when SCP considers not to use the existing access token and obtains new access token in the service request forwarded to producer NFs. <ul style="list-style-type: none"> <li>Default value: 30000ms</li> <li>Range: 100ms - 300000ms</li> </ul>  |
| <b>Access Token Clean Up Post Expiry</b> | This field indicates the duration to purge the token from cache. <ul style="list-style-type: none"> <li>Default value: 900000ms</li> <li>Range: 0ms - 3600000ms</li> </ul>                                                                                                                                     |
| <b>Access Token History Size</b>         | This field indicates the number of access tokens signature history to identify whether the access token initiated by SCP or not. <ul style="list-style-type: none"> <li>Default value: 10 records</li> <li>Range: 0 - 20 records</li> </ul>                                                                    |
| <b>Access Token Cache Size</b>           | This field indicates the number of access tokens that can be cached in SCP. <ul style="list-style-type: none"> <li>Default value: 50000 records</li> <li>Range: 5000 - 100000 records</li> </ul>                                                                                                               |
| <b>Requester Info</b>                    | This field indicates access token requester (consumer NF) Info to generate the access token request. <ul style="list-style-type: none"> <li>Prioritized list of default values: <ol style="list-style-type: none"> <li>DISCOVERY-HEADERS</li> <li>CCA-HEADER</li> <li>USER-AGENT-HEADER</li> </ol> </li> </ul> |
| <b>Cache Enabled</b>                     | This option enables or disables caching of access tokens. <ul style="list-style-type: none"> <li>Default value: true</li> <li>Range: true or false</li> </ul>                                                                                                                                                  |

5. Click **Save**.

#### 4.2.1.15 Configuring SCP Health Check API

Perform the following the procedure to configure SCP health check API.

1. In the left navigation pane, click the **Health Check** tab.
2. In the Health Check section, click **Edit**.

Figure 4-20 Health Check

Feature Name: health\_check

Enabled: ☒

✓ **Feature Specific Config**

✓ **SCP Health API**

Success Response Type: Success Response Type  
200\_WITH\_EMPTY\_PAYLOAD

✓ **Overload**

Average SCP Load Threshold Value: Average SCP Load Threshold Value  
75

Overload Response Profile: Overload Response Profile  
healthCheckErrorProfile

✓ **Next Hop SCP**

SCP Health Check Service Enabled: ☐

Request Timeout: Request Timeout  
1000

Polling Interval: Polling Interval  
1000

3. Ensure that Enabled is set to true. This is the default configuration.
4. In the **Feature Specific Config** section, you can modify the following configurations:

Table 4-4 Configure Health Check API

| Field Name                              | Description                                                                                                                                                                                                                              |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Success Response Type</b>            | This field indicates successful responses for a healthy SCP. <ul style="list-style-type: none"> <li>• Default value: 200StatusCodeAndEmptyPayload</li> <li>• Range: 200WithPayload, 200WithEmptyPayload, and 204WithNoContent</li> </ul> |
| <b>Average SCP Load Threshold Value</b> | This field provides the overall average SCP load threshold value. <ul style="list-style-type: none"> <li>• Default value: 75%</li> <li>• Range: 75% - 90%</li> </ul>                                                                     |



Table 4-4 (Cont.) Configure Health Check API

| Field Name                              | Description                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Overload Response Profile</b>        | This field indicates the error profile configuration for the health query response in the exception conditions. <ul style="list-style-type: none"> <li>Default value: healthCheckErrorProfile. For more information about this option, see "Configuring Error Profiles" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> </ul> |
| <b>SCP Health Check Service Enabled</b> | This option enables or disables the SCP health check API feature in inter-scp scenarios. <ul style="list-style-type: none"> <li>Default value: false</li> <li>Range: true or false</li> </ul>                                                                                                                                                                                               |
| <b>Request Timeout</b>                  | This field indicates the timer to monitor the waiting time for health check response in inter-scp scenarios. <ul style="list-style-type: none"> <li>Default value: 1000ms</li> <li>Range: 300ms -60000ms</li> </ul>                                                                                                                                                                         |
| <b>Polling Interval</b>                 | This field indicates the duration to control the periodicity of health check requests in inter-scp scenarios. <ul style="list-style-type: none"> <li>Default value: 1000ms</li> <li>Range: 300ms -60000ms</li> </ul>                                                                                                                                                                        |
| <b>Consecutive Error Response</b>       | This field indicates the total number of consecutive failure responses that leads to failover in inter-scp scenarios. <ul style="list-style-type: none"> <li>Default value: 3</li> <li>Range: 1 - 20</li> </ul>                                                                                                                                                                             |
| <b>Consecutive Success Response</b>     | This field indicates the total number of consecutive successful responses that leads to fallback in inter-scp scenarios. <ul style="list-style-type: none"> <li>Default value: 3</li> <li>Range: 1 - 20</li> </ul>                                                                                                                                                                          |

- Click **Save**.

#### 4.2.1.16 NRF Configuration using DNS SRV Resolution

Perform the following procedure to NRF configuration using DNS SRV resolution.

- In the left navigation pane, click the **NRF Bootstrap Info** tab.
- In the NRF Bootstrap Info section, click **Edit**.

Figure 4-21 Edit NRF Bootstrap Info

The screenshot displays the 'Edit NRF Bootstrap Info' configuration interface. It includes a 'Feature Name' field with the value 'nrf\_bootstrap\_info' and an 'Enabled' toggle switch that is currently disabled. Below this, the 'Feature Specific Config' section is expanded, showing a 'Source' dropdown menu set to 'DNS\_SRV' and a 'DeRegister Scp During Migration' toggle switch that is also disabled. At the bottom right of the form, there are 'Save' and 'Cancel' buttons.

- Set Enabled to true.  
By default, this option is set to false.

4. In the **Feature Specific Config** section, enter the following input for the following configurations:

**Table 4-5 Configure NRF Source Configuration**

| Field Name                          | Description                                                                                                                                                                                                                                                                                  |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Source</b>                       | This field is used to select whether the NRF Configuration Using DNS SRV Resolution feature should be enabled or disabled. SCP will enable the feature if the source is DNS_SRV.<br>The default value is DNS_SRV.                                                                            |
| <b>deRegisterScpDuringMigration</b> | In the migration from static to DNS SRV task, if static and DNS SRV NRF configurations are the same, then this parameter will be used to deregister SCP with the old or static NRFset. <ul style="list-style-type: none"><li>• Default value: false</li><li>• Range: true or false</li></ul> |

5. Click **Save**.

#### 4.2.1.17 Configuring Overload Control Based on the Overload Control Information Header

Perform the following procedure to configure overload control based on the overload control information header.

1. From the SCP Features list, click the OCI tab.
2. On the OCI page, click the **Edit** icon.

Figure 4-22 Edit OCI

## Edit OCI

|               |                          |
|---------------|--------------------------|
| Feature Name: | Feature Name<br>oci      |
| Enabled:      | <input type="checkbox"/> |

▼ Feature Specific Config

|                                   |                                           |
|-----------------------------------|-------------------------------------------|
| olcHSupportInd:                   | <input checked="" type="checkbox"/>       |
| SCP OCI Conveyance Interval:      | SCP OCI Conveyance Interval<br>2,000      |
| SCP OCI Recovery Validity Period: | SCP OCI Recovery Validity Period<br>3,600 |
| Next Hop SCP OCI Enabled:         | <input checked="" type="checkbox"/>       |

3. In the Edit OCI section, set **Enabled** to true.  
By default, this option is set to false.

**Figure 4-23 Enabling OCI**

Next Hop SCP OCI Rule Name:

Next Hop SEPP OCI Enabled: ☒

Next Hop SEPP OCI Rule Name:

▼ **scpOciConveyance**

enable: ☒

▼ **unknownPeer**

request: ☒

response: ☒

Save Cancel

4. To configure OCI, in the Feature Specific Config section, set the following fields:

**Table 4-6 Configure OCI**

| Field Name                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| olcHSupportInd                   | This option indicates that SCP supports the Overload Control Information (OCI) feature based on the 3gpp-Sbi-Oci header. By default, this option is enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| SCP OCI Conveyance Interval      | This field indicates the interval for reporting SCP OCI to peer NFs. For every interval until the validity period, the last sent OCI is reported to peer NF irrespective of any change to SCP OCI. Sending SCP OCI periodically ensures that the peer NF has not missed an earlier reported SCP OCI. The same OCI header as sent on the last OCI threshold change or validity period expiry is sent. <ul style="list-style-type: none"> <li>Default value: 2000 milliseconds</li> <li>Range: 2000 to 3600000 milliseconds</li> </ul> <b>Note:</b> OCI is sent to peer NFs only if there is a message for that NF. |
| SCP OCI Recovery Validity Period | This field indicates the validity period to send OCI headers to peers when SCP recovers from an overloaded state. SCP sends OCI to peers with reduction metric as 0. <ul style="list-style-type: none"> <li>Default value: 3600 seconds</li> <li>Range: 5 to 3600 seconds</li> </ul>                                                                                                                                                                                                                                                                                                                              |
| Next Hop SCP OCI Enabled         | This option enables or disables the OCI feature between SCP instances and SCP scope OCI. By default, this option is enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Next Hop SCP OCI Rule Name       | If the Next Hop SCP OCI Enabled option is enabled, the OCI feature enforcement is done based on the ociConfigRule REST API configuration with the name provided as the value for this option. By default, this value is NextHopScpOciRuleName.                                                                                                                                                                                                                                                                                                                                                                    |
| Next Hop SEPP OCI Enabled        | This option enables or disables OCI enforcement between SCP and SEPP interfaces and SEPP scope OCI. By default, this option is enabled.                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

Table 4-6 (Cont.) Configure OCI

| Field Name                  | Description                                                                                                                                                                                                                                                                   |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Next Hop SEPP OCI Rule Name | If the Next Hop SEPP OCI Rule Name option is enabled, the OCI feature enforcement is done based on the ociConfigRule REST API configuration with the name provided as the value for this option.<br>By default, this value is NextHopSeppOciRuleName.                         |
| scpOciConveyance            | If this option is set to true, SCP starts conveying the 3gpp-Sbi-Oci header based on self-overload information.<br>By default, this option is enabled.                                                                                                                        |
| unknownPeer<br>• request    | If this field is set to true, SCP starts conveying the 3gpp-Sbi-Oci header based on self-overload information to requests to unknown peers. For unknown peers, identification of peer NFs is done based on the message request's FQDN.<br>By default, this option is enabled. |
| unknownPeer<br>• response   | If this option is set to true, SCP starts conveying the 3gpp-Sbi-Oci header based on self-overload information to responses to unknown peers. If this parameter is set to true, SCP adds self-OCI header in every response message.<br>By default, this option is disabled.   |


- Click **Save**.

#### 4.2.1.18 Configuring Enhanced NFProfile Processing

Perform the following procedure to enable the NFProfile Processing enhancements supported by SCP using Cloud Native Configuration Console (CNC Console).

- In the left navigation pane, click the **Ignore Unknown Nf Service** tab.  
The Ignore Unknown Nf Service page appears.

Figure 4-24 Ignore Unknown Nf Service

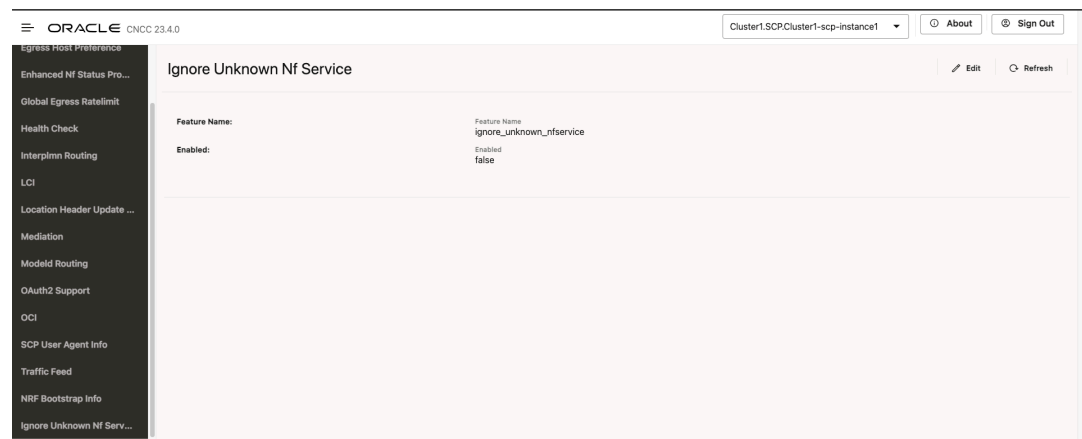

- On the Ignore Unknown Nf Service page, click the **Edit** icon.
- In the **Edit Ignore Unknown Nf Service** section, set **Enabled** to true.  
By default, this option is set to false.

#### 4.2.1.19 Configuring 3GPP Timestamp Headers Support

Perform the following procedure to enable or disable the 3GPP Timestamp Related Headers Support feature and configure its settings.

1. In the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP Features list, click **Timestamp Header Support**.
3. In the Timestamp Header Support section, click **Edit**.

**Figure 4-25 Edit Timestamp Headers Support**

The screenshot shows the 'Edit Timestamp Headers Support' configuration page. The form includes the following sections:

- Feature Name:** A label and a disabled toggle switch.
- Feature Specific Config:** A section containing two toggle switches:
  - Dynamic Response Timeout:** A toggle switch.
  - Update Timestamp Headers:** A toggle switch.
- Response Transit Time:** A section containing three text input fields:
  - Downstream NF:** A text input field with the placeholder 'Downstream NF' and a 'Required' label.
  - Downstream SCP:** A text input field with the placeholder 'Downstream SCP' and a 'Required' label.
  - Downstream SEPP:** A text input field with the placeholder 'Downstream SEPP' and a 'Required' label.
- Created Timestamp:** A text input field with the placeholder 'Created Timestamp'.
- Updated Timestamp:** A text input field with the placeholder 'Updated Timestamp'.

At the bottom right, there are 'Save' and 'Cancel' buttons.

4. Set **Enabled** to true.  
By default, this option is set to false.
5. In the **Feature Specific Config** section, configure the following fields as required:
  - **Dynamic Response Timeout:** This field, when set to true, enables SCP to perform dynamic response time calculations based on the received timestamp headers. It updates or adds the 3gpp-Sbi-Sender-Timestamp and 3gpp-Sbi-Max-Rsp-Time headers in the egress SBI request.
    - Date Type: Boolean
    - Default Value: true
    - Range: true or false
  - **Update Timestamp Headers:** This field, when set to true and dynamicResponseTimeout is false, allows SCP to add or update the 3gpp-Sbi-Sender-Timestamp and 3gpp-Sbi-Max-Rsp-Time headers in the egress SBI request. The 3gpp-Sbi-Sender-Timestamp is set to reflect the current timestamp at scp-worker, while the 3gpp-Sbi-Max-Rsp-Time will be set to the configured responseTimeout value for the specific service.
    - Date Type: Boolean
    - Default Value: true
    - Range: true or false

**Note**

When `dynamicResponseTimeout` is true, the value of `updateTimestampHeaders` will not have any impact and should be set to true. In this case, SCP will always add or update the `3gpp-Sbi-Sender-Timestamp` and `3gpp-Sbi-Max-Rsp-Time` headers in the egress SBI request.

- **Response Transit Time:** This field specifies the minimum estimated transit time required (in milliseconds) for the response to reach back from SCP to the original sender, whether it's the Consumer NF, SCP, or SEPP.
  - Default Value:

```
"responseTransitTime": {
  "downstreamNF": 50,
  "downstreamSCP": 100,
  "downstreamSEPP": 300
}
```
  - Range: NA
- **Downstream NF:** This field specifies the minimum estimated transit time required (in milliseconds) for the response to return to the original requester NF.
  - Date Type: Integer
  - Default Value: 50
  - Range: 0 - 10000
- **Downstream SCP:** This field specifies the minimum estimated transit time required (in milliseconds) for the response to return to the original requester SCP.
  - Date Type: Integer
  - Default Value: 100
  - Range: 0 - 10000
- **Downstream SEPP:** This field specifies the minimum estimated transit time required (in milliseconds) for the response to return to the original requester SEPP.
  - Date Type: Integer
  - Default Value: 300
  - Range: 0 - 10000

6. Click **Save**.

**Note**

For optimal functionality, this feature requires NTP (Network Time Protocol) synchronization across all nodes communicating with the SCP, including the SCP itself.

## 4.2.1.20 Configuring Enhanced Notifications Handling

Perform the following procedure to enable or disable the Enhanced Notifications Handling feature.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP features' list, click the **Enhanced Notifications Handling** tab.
3. In the Enhanced Notifications Handling section, click **Edit**.
4. Set **Enabled** to true.  
By default, this option is set to false.
5. In the Feature Specific Config section, set **Alternate Routing Without Servname** to true.  
By default, this option is set to false.
6. Ensure that the following fields display the time of occurrence of the records:
  - **Created Timestamp**: Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
  - **Updated Timestamp**: Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

#### 4.2.1.21 Configuring Ingress Rate Limiting

Perform the following procedure to enable or disable the Ingress Rate Limiting feature.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP features' list, click the **Ingress Rate Limiting** tab.
3. In the Ingress Rate Limiting section, click **Edit**.
4. Ensure that **Enabled** is set to true.  
By default, this option is set to true.
5. Ensure that the following fields display the time of occurrence of the records:
  - **createdTimestamp**: Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
  - **updatedTimestamp**: Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

#### 4.2.1.22 Configuring Egress Rate Limiting

Perform the following procedure to enable or disable the Egress Rate Limiting feature.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP features' list, click the **Egress Rate Limiting** tab.
3. In the Egress Rate Limiting section, click **Edit**.
4. Ensure that **Enabled** is set to true.  
By default, this option is set to true.
5. Ensure that the following fields display the time of occurrence of the records:
  - **createdTimestamp**: Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
  - **updatedTimestamp**: Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.




## 4.2.2 Configuring OCI

Perform the following procedure to retrieve, modify, and remove OCI configuration data.

1. From the left navigation pane, click the **SCP** tab, and then click the **OCI** tab.
2. From the left navigation pane, click the **OCI Config** tab.
3. In the OCI Config section, click **Get** to retrieve OCI configuration data based on the query parameters.

**Figure 4-26 OCI Config**

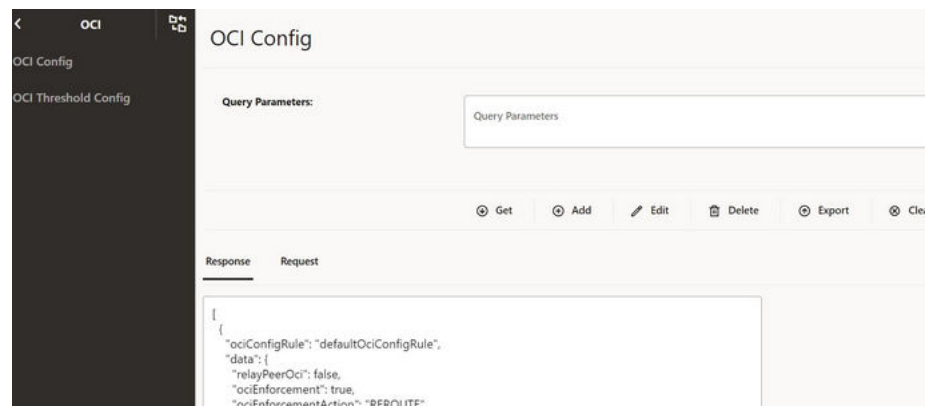

4. To add a new request, click **Add** and enter the request body information in the **Request** field.
5. Click **Submit**.

The request body message appears in the **Response** field.

To edit, export, delete, or clear the data, click the required buttons as described in the following table:

**Table 4-7 Button and Field Descriptions of OCI**

| Button and Field Names  | Description                                                                                                   |
|-------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Query Parameters</b> | Allows to enter parameters to retrieve, add, and update OCI configuration data based on the query parameters. |
| <b>Get</b>              | Retrieves OCI configuration data. You can modify this data using the <b>Edit</b> button.                      |
| <b>Add</b>              | Adds new message requests in the <b>Request</b> field.                                                        |
| <b>Edit</b>             | Modifies any existing data by updating mandatory query parameters in the <b>Query Parameters</b> field.       |
| <b>Delete</b>           | Removes any message request.                                                                                  |
| <b>Export</b>           | Exports existing records in the JSON format.                                                                  |
| <b>Clear</b>            | Refreshes the existing screen by removing the data.                                                           |


## 4.2.3 Configuring OCI Threshold Levels

Perform the following procedure to retrieve, modify, and remove OCI threshold configuration data.

1. From the left navigation pane, click the **SCP** tab, and then click the **OCI** tab.

2. From the left navigation pane, click the **OCI Threshold Config** tab.
3. In the OCI Threshold Config section, click **Get** to retrieve OCI threshold configuration data based on the query parameters.

**Figure 4-27 OCI Threshold Config**

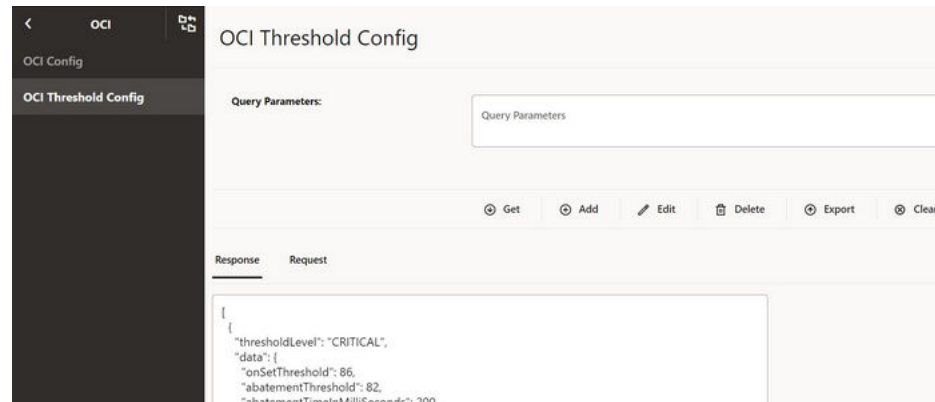

4. To add a new request, click **Add** and enter the request body information in the **Request** field.
5. Click **Submit**.

The request body message appears in the **Response** field.

To edit, export, delete, or clear the data, click the required buttons as described in the following table:

**Table 4-8 Button and Field Descriptions of OCI Threshold Configuration**

| Button and Field Names  | Description                                                                                                             |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Query Parameters</b> | Allows to enter parameters to retrieve, add, and update OCI threshold configuration data based on the query parameters. |
| <b>Get</b>              | Retrieves OCI threshold configuration data. You can modify this data using the <b>Edit</b> button.                      |
| <b>Add</b>              | Adds new message requests in the <b>Request</b> field.                                                                  |
| <b>Edit</b>             | Modifies any existing data by updating mandatory query parameters in the <b>Query Parameters</b> field.                 |
| <b>Delete</b>           | Removes any message request.                                                                                            |
| <b>Export</b>           | Exports existing records in the JSON format.                                                                            |
| <b>Clear</b>            | Refreshes the existing screen by removing the data.                                                                     |

## 4.2.4 Viewing cnDBTier APIs on the CNC Console

Perform the following procedure to view the cnDBTier version, the status of cnDBTier clusters, georeplication status, and georeplication recovery status on the CNC Console.

### **Note**

The following cnDBTier APIs are read only.

### 4.2.4.1 Backup List

Perform the following procedure to view the list of completed backups:

- From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
- Click the **Backup List** to view the list of completed backups along with Backup ID, Backup size, and Creation Timestamp.  
The **Backup List** screen is displayed.

**Table 4-9 Backup List**

| Fields              | Description                                                                                    |
|---------------------|------------------------------------------------------------------------------------------------|
| Backup Details      | This field displays information such as backup Id, backup size, and backup creation timestamp. |
| Site Name           | This field displays the name of the current site to which SCP is connected.                    |
| Backup Id           | This field displays the ID of the stored backup.                                               |
| Backup Size (bytes) | This field displays the size of the stored backup.                                             |
| Creation TimeStamp  | This field displays the time recorded when the backup was stored.                              |

### 4.2.4.2 cnDBTier Backup Status

Perform the following procedure to check the cnDBTier backup status:

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier Backup Status** tab.
2. On the cnDBTier Backup Status page, click **Refresh** to view the latest cnDBTier backup status as described in the following table:

**Table 4-10 cnDBTier Backup Status**

| Fields                          | Description                                                   |
|---------------------------------|---------------------------------------------------------------|
| Current Timestamp               | This field displays the current system time.                  |
| Is Backup In Progress           | This field displays whether any backup is in progress or not. |
| Next Backup Scheduled Timestamp | This field displays the time for the next scheduled backup.   |

### 4.2.4.3 cnDBTier Version

Perform the following procedure to view the version:

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **cnDBTier Version** to view the version.

**Table 4-11 cnDBTier Version Attributes**

| Fields           | Description                                             |
|------------------|---------------------------------------------------------|
| cnDBTier Version | This field displays the cnDBTier version.               |
| NDB Version      | This field displays the network database (NDB) version. |

## 4.2.4.4 Database Statistics Report

Perform the following procedure to view the available database.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **Database Statistics Report** to view the available database.

**Table 4-12 Database Statistics Report**

| Fields                    | Description                                                             |
|---------------------------|-------------------------------------------------------------------------|
| Database Count            | This field displays the number of available database.                   |
| Database Tables Count     | This field displays the available database names and their table count. |
| Database Name             | This field displays the database name.                                  |
| Table Count               | This field displays the table count for each database.                  |
| Database Table Rows Count | This field displays the table rows present in each table.               |

Click on **View** icon available next to the database name to view the **View Database Table Rows Count** screen.

**Table 4-13 View Database Table Rows Count**

| Fields        | Description                                                                   |
|---------------|-------------------------------------------------------------------------------|
| Database Name | This field displays the database name.                                        |
| Tables        | This field displays the table names and the corresponding rows in each table. |
| Table Name    | This field displays the table name.                                           |
| Row Count     | This field displays the table rows present in each table.                     |

## 4.2.4.5 Georeplication Recovery

Perform the following procedure to mark cnDBTier cluster as failed, execute georeplication recovery, and monitor their status:

1. From the left navigation menu, navigate to **SCP** and then click **cnDBTier** tab.
2. Click **Georeplication Recovery** to access the Georeplication Recovery Status of the cnDBTier cluster. This includes options such as Update Cluster As Failed, Start Georeplication Recovery, and Georeplication Recovery Status.
  - Click the **Update Cluster As Failed** to mark the cluster as FAILED. The **Update Cluster As Failed** page is displayed.

**Table 4-14 Update Cluster As Failed**

| Fields               | Description                                                                   |
|----------------------|-------------------------------------------------------------------------------|
| Cluster Names        | This field displays a list of cnDBTier clusters that can be marked as failed. |
| Failed Cluster Names | This field displays a cnDBTier cluster that is marked as failed.              |

Click **Update Cluster**. The selected cluster name is updated in the **Failed Cluster Names** field.

- Click the **Start Georeplication Recovery** to start the georeplication recovery process for a failed site.  
The **Start Georeplication Recovery** page is displayed.

**Table 4-15 Start Georeplication Recovery**

| Attribute                      | Description                                                                                                                                            |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Failed Cluster Name            | This field displays a list of all the clusters that have been marked as failed.                                                                        |
| Backup Cluster Name (Optional) | This field displays a list of all the healthy clusters. If no cluster is selected, the system uses the first available healthy cluster for the backup. |

Click **Start Georeplication Recovery** to initiate georeplication recovery.

- Click the **Georeplication Recovery Status** to view the status of georeplication recovery for cnDBTier clusters.  
The **Georeplication Recovery Status** page is displayed.

**Table 4-16 Georeplication Recovery Status**

| Attribute                             | Description                                                                                  |
|---------------------------------------|----------------------------------------------------------------------------------------------|
| Local Cluster Name                    | This field displays the name of the local cluster.                                           |
| Georeplication Recover Status Details | This field displays the details of the georeplication recovery status of cnDBTier clusters.  |
| Cluster Name                          | This field displays the clusters by name.                                                    |
| Georeplication Recovery Status        | This field displays the current georeplication recovery status of the corresponding cluster. |

The following are the statuses of Georeplication Recovery:

**Table 4-17 Georeplication Recovery Status**

| Georeplication Recovery Status | Description                                                                                                                                                                               |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ACTIVE                         | The cluster is in a healthy state, and replication is up and running with its respective mate cluster.                                                                                    |
| REINSTALLED                    | The cluster enters this state during fatal error recovery when the end user reinstalls the cluster.                                                                                       |
| STARTDRRESTORE                 | When Georeplication recovery is started, the cluster will transition into this state.                                                                                                     |
| INITIATEBACKUP                 | When Georeplication recovery is started, the cluster will identify a healthy cluster for backup initiation and transition into this state.                                                |
| CHECKBACKUP                    | When the backup is initiated, the georeplication recovery cluster will monitor the progress of the backup until its completion. If the backup fails, the cluster will restart the backup. |
| COPY_BACKUP                    | Upon completion of the backup, the georeplication recovery cluster will request the transfer of the backup from the healthy cluster to the georeplication recovery cluster.               |

**Table 4-17 (Cont.) Georeplication Recovery Status**

| Georeplication Recovery Status | Description                                                                                                                                                                                                                                                                                       |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CHECK_BACKUP_COPY              | When backup copy is started georeplication recovery cluster will monitor for the backup transfer progress till it's completion and if it's fails the cluster will re-initiates the backup transfer.                                                                                               |
| BACKUPCOPIED                   | When the backup copy is started, the georeplication recovery cluster will monitor the progress of the backup transfer until its completion. If the transfer fails, the cluster will restart the backup transfer.                                                                                  |
| BACKUPEXTRACTED                | This state indicates that the backup has been successfully extracted at the georeplication recovery cluster, allowing the restoration of the backup to start.                                                                                                                                     |
| FAILED                         | This state is used by end user to mark specific cluster as failed and hence georeplication recovery is essential to recover the cluster. This state can also indicates that georeplication recovery started and the database is restored using the healthy cluster backup.                        |
| UNKNOWN                        | This state is used by the end user to mark a specific cluster as failed, necessitating georeplication recovery for cluster recovery. Additionally, this state can indicate that georeplication recovery has started and the database has been restored using the backup from the healthy cluster. |
| RECONNECTSQLNODES              | This state is used to instruct SQL nodes to be offline during backup restoration to prevent any records from entering the binlog of the georeplication recovery cluster.                                                                                                                          |
| BACKUPRESTORE                  | This state indicates that the backup, successfully copied from the healthy cluster, is currently being used to restore the georeplication recovery cluster.                                                                                                                                       |
| RESTORED                       | When the backup is successfully restored in the georeplication recovery cluster, the cluster will enter this state to start the reestablishment of replication channels.                                                                                                                          |
| BINLOGINITIALIZED              | This state indicates the start of binlogs for the restoration of replication channels, necessary to start the restore process                                                                                                                                                                     |
| RECONFIGURE                    | When the binlog is restarted, the georeplication recovery cluster will reestablish the replication channels with respect to all its mate clusters.                                                                                                                                                |

#### 4.2.4.6 Georeplication Status

Perform the following procedure to view the local site and remote site name to which SCP is connected.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **Georeplication Status** to view the local site and remote site name to which SCP is connected.

**Table 4-18 Georeplication Status**

| Fields           | Description                                                        |
|------------------|--------------------------------------------------------------------|
| Local Site Name  | This field displays the local site name to which SCP is connected. |
| Remote Site Name | This field displays the remote site name.                          |

**Table 4-18 (Cont.) Georeplication Status**

| Fields                     | Description                                                                                                                                                                  |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Replication Status         | This field displays the replication status with corresponding sites.                                                                                                         |
| Seconds Behind Remote Site | This field displays the number of seconds that the last record read by the local site is behind the latest record written by the remote site for all the replication groups. |

- a. Click the **View** icon in the **Actions** menu to view the **View Georeplication Status** screen.

**Table 4-19 Georeplication Status**

| Fields                       | Description                                                                                                                                                                     |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Replication Group Delay      | This field displays the number of seconds that the last record read by the local site is behind the latest record written by the remote site for individual replication groups. |
| Replication Channel Group Id | This field displays the ID of the replication channel group.                                                                                                                    |

- b. Click the **View** icon to view the **Replication Group Delay** attributes.

**Table 4-20 View Replication Group Delay**

| Fields                | Description                                                                     |
|-----------------------|---------------------------------------------------------------------------------|
| Channel Details       | This field displays the channel details such as Remote Replication IP and Role. |
| Remote Replication IP | This field displays the IP of the remote replication channel.                   |
| Role                  | This field displays the role of the replication channel IP.                     |

### 4.2.4.7 Replication HeartBeat Status

Perform the following procedure to view the connectivity between local site and remote site name to which SCP is connected.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **Replication HeartBeat Status** to view the connectivity between local site and remote site name to which SCP is connected.

**Table 4-21 Replication HeartBeat Status Details**

| Fields            | Description                                                                                                                      |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Site Name         | This field displays the name of the current site to which SCP is connected.                                                      |
| HeartBeat Details | This field displays information such as the remote site name, heartbeat status, heartbeat lag, and replication channel group id. |
| Remote Site Name  | This field displays the remote site name.                                                                                        |
| Heartbeat Status  | This field displays the connectivity status with corresponding sites.                                                            |
| Heartbeat Lag     | This field displays the delay or latency in seconds it took to synchronize between sites.                                        |

Table 4-21 (Cont.) Replication HeartBeat Status Details

| Fields                       | Description                                                  |
|------------------------------|--------------------------------------------------------------|
| Replication Channel Group Id | This field displays the ID of the replication channel group. |

#### 4.2.4.8 Local Cluster Status

Perform the following procedure to view the local cluster status for the current site.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **Local Cluster Status** to view the local cluster status for the current site:

Table 4-22 Local Cluster Status

| Fields         | Description                                                                    |
|----------------|--------------------------------------------------------------------------------|
| Cluster Name   | This field displays the name of the current cluster to which SCP is connected. |
| Cluster Status | This field displays the local cluster status for the current site.             |

#### 4.2.4.9 On Demand Backup

Perform the following procedure to view the available database.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **On Demand Backup** to create a new backup and view the status of initiated on-demand backups.

Table 4-23 On Demand Backup Details

| Fields                 | Description                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------|
| Site Name              | This field displays the name of the current site in which the cnDBTier cluster is deployed. |
| DR Status              | This field displays the disaster recovery status.                                           |
| Backup Id              | This field displays the ID of the stored backup.                                            |
| Backup Status          | This field displays the status of backup.                                                   |
| Transfer Status        | The field displays the status of the local transfer.                                        |
| Remote Transfer Status | The field displays the status of remote transfer.                                           |
| Initiate Backup        | The field displays whether the backup is initiated or not.                                  |

- a. Click the **Edit** icon.  
The **Edit** On Demand Backup screen appears.

 **Note**

The **Edit** mode is available only for Initiate Backup.

- b. Enable the Initiate Backup option click **Save**.  
A confirmation message "Save successfully" appears.
- c. Click the **Cancel** to navigate back to the On Demand Backup screen.



- d. Click the **Refresh** to reload the On Demand Backup screen.

#### 4.2.4.10 cnDBTier Health

Perform the following procedure to view the health status of the microservices:

1. From the left navigation menu, navigate to **SCP** and then click **cnDBTier** tab.  
The **cnDBTier** page is displayed.
2. Click **cnDBTier Health** to view the health status of the microservices like replication, backup manager, monitor services, and NDB services.  
The **cnDBTier Health** page is displayed.
  - Click the **Backup Manager Health Status** to view the health status of the backup manager.  
The **Backup Manager Health Status** page is displayed.

#### Note

The following APIs are read-only.

**Table 4-24 Backup Manager Health Status**

| Fields                                | Description                                                                                                                    |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Service Name                          | This attribute displays the service name of the backup manager microservice.                                                   |
| Service Status                        | This attribute displays the service status of the backup manager microservice.<br>Possible values are UP and DOWN.             |
| DB Connection Status                  | This attribute displays the database connection status of the backup manager microservice.<br>Possible values are UP and DOWN. |
| Overall Backup Manager Service Health | This attribute displays the overall health status of the backup manager microservice.<br>Possible values are UP and DOWN.      |
| Backup Executor Health Status         | This attribute displays the following information like node id and DB connection status of the backup executor.                |
| Node Id                               | This attribute displays the id of the node.                                                                                    |
| DB Connection Status                  | This attribute displays the backup executor database connection status with the nodes.<br>Possible values are UP and DOWN.     |

- Click the **Monitor Health Status** to view the health status of the services.  
The **Monitor Health Status** page is displayed.

#### Note

The following APIs are read-only.

**Table 4-25 Monitor Health Status details**

| Attribute                      | Description                                                                                                                                                                                            |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Service Name                   | This attribute displays the service name of the monitor microservice.                                                                                                                                  |
| DB Connection Status           | This attribute displays the database connection status of the monitor microservice. Possible values are UP and DOWN.                                                                                   |
| Metric Scrape Status           | This attribute displays the status of the metric scrape, that is if the metrics are fetched or not. If the metrics are fetched then the service is up and vice versa. Possible values are UP and DOWN. |
| Overall Monitor Service Health | This attribute displays the overall health status of the monitor microservice. Possible values are UP and DOWN.                                                                                        |

- Click the **NDB Health Status** to view the health status of the network database. The **NDB Health Status** page is displayed.

**Note**

The following APIs are read-only.

**Table 4-26 NDB Health Status details**

| Attribute                 | Description                                                                                                                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Local Site Name           | This attribute displays the name of the current site. For example, site 1, site 2.                                                                                                                   |
| NDB Health Status Details | This attribute displays the health status of the network database like name of the NDB service, status of the service, health status of PVC.                                                         |
| Service Name              | This attribute displays the service name. For example, ndbmgmd-0, ndbmttd-0, ndbmyappsqld-1, ndbmysqld-2.                                                                                            |
| Service Status            | This attribute displays the status of the service. Possible values are UP and DOWN.                                                                                                                  |
| PVC Health Status         | This attribute displays the health status of the PVC. Possible values are UP, DOWN, and NA.<br><b>Note:</b> This attribute is set to NA when some of the database pods are not connected to the PVC. |

- Click the **Replication Health Status** to view the health status of the replication sites. The **Replication Health Status** page is displayed.

**Note**

The following APIs are read-only.

**Table 4-27 Replication Health Status details**

| Attribute                          | Description                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Local Site Name                    | This attribute displays the name of the current site (site 1, site 2 ).                                                                                                                                                                                                                                                                                                            |
| Health Status Details              | This attribute displays the health status details of the local site like replication service name, replication service status, database connection status of the replication service, and the overall health status of the replication microservices. The number of rows in this table varies depending on the type of deployment (for example, two-site, three-site deployments). |
| Service Name                       | This attribute displays the name of the available replication service.                                                                                                                                                                                                                                                                                                             |
| Service Status                     | This attribute displays the status of the available replication service.<br>Possible values are UP and DOWN.                                                                                                                                                                                                                                                                       |
| DB Connection Status               | This attribute displays the database connection status of the replication microservice.<br>Possible values are UP and DOWN.                                                                                                                                                                                                                                                        |
| Overall Replication Service Health | This attribute displays the overall health status of the replication microservice.<br>Possible values are UP and DOWN.                                                                                                                                                                                                                                                             |

## 4.2.5 Configuring NRF SRV

Perform the following procedure to configure NRF using DNS SRV Resolution.

1. From the left navigation pane, navigate to **SCP** and click the **NRF SRV Configuration** tab.
2. In the NRF SRV FQDN section, click the **Add** button to create the new NRF SRV configuration for the given NRF SRV FQDN.  
You can configure the NRF configurations at run time, and this NRF SRV FQDN shall be mapped to target NRF FQDNs. SCP uses this NRF SRV FQDN to query the DNS SRV server to get the actual target NRF FQDNs. NRF SRV FQDN

**Figure 4-28 Add NRF SRV Configuration**

The screenshot shows the 'Add NRF SRV Configuration' interface. On the left is a dark sidebar with navigation links: Routing Options, Routing Config Set, Routing Options Configura..., SBI Message Priority, SCP Features, SCP Profile, SCP Service Configurat..., SEPP Info, Service Groups, Topology Source Info, Traffic Feed, Upgrade Status, **NRF SRV Configuration**, SCP Feature Status, and NfinstanceId And Servicel... The main panel is titled 'Add NRF SRV Configuration'. It contains the following fields: 'NRF SRV FQDN' (text input), 'NF SetId List' (text input), 'Perform Subscription' (toggle switch), 'Perform Audit' (toggle switch), 'Register Scp' (toggle switch), 'ApiPrefix' (text input), 'Scheme' (dropdown menu), and a 'PLMN List' table. The table has columns for 'MCC' and 'MNC', each with a dropdown arrow, and an 'Add' button. Below the table, it says 'No data to display.'

- To configure the NRF SRV, enter the input for the following fields:

**Table 4-28 NRF SRV Configuration**

| Field Name                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>NF SetId List</b>        | This is the SetId list for this NRF SRV configuration.<br>You can configure multiple nfSetIds, but the NRF profile and rule creation will only take into account the nfSetId from the 0th index.<br>This setId must be unique for each NRF SRV configuration; that is, this setId must not be present in any other NRF SRV configuration.                                                                                                                                                                               |
| <b>Perform Subscription</b> | This field allows to decide whether NRF from this NRF SRV should be used for a subscription or not.<br>The possible values are true or false.                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Perform Audit</b>        | This field allows to decide whether NRF from this NRF SRV should be used for a audit or not.<br>The possible values are true or false.                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Register SCP</b>         | This field allows to decide whether to register SCP with the NRF from the NRF Set.<br>The possible values are true or false.                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Scheme</b>               | This field is used for the URI Scheme. The supported value is http/https.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>PLMN List</b>            | This field indicates the list of NRFs serving Public Land Mobile Network (PLMN). A PLMN has a unique PLMN code, which consists of a MCC (Mobile Country Code) and an MNC (Mobile Network Code).<br>Click the <b>Add</b> button to add MCC and MNC, respectively.                                                                                                                                                                                                                                                        |
| <b>Versions</b>             | This field lists the NFServiceVersion.<br>Configuring multiple API versions is permissible, but at least one entry in the version list must have its apiVersionInUri set to "v1." This is because SCP currently utilizes "v1" for its self-generated requests towards NRF. <ul style="list-style-type: none"> <li>Click the <b>Add</b> button to add NFServiceVersion.</li> <li>The supported value of apiVersionInUri is v1/v2.</li> <li>The apiFullVersion should be in format x.y.z., for example, 1.0.0.</li> </ul> |
| <b>apiPrefix</b>            | This field is used in the URI while communicating with NRF.                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

Table 4-28 (Cont.) NRF SRV Configuration

| Field Name             | Description                                                                                                                                                                                                               |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>serviceNames</b>    | Indicates the service name of the NRF SRV configuration.<br>The nnrf-nfm and nnrf-disc are mandatory for NRF SRV configurations.<br>The supported value is nnrf-nfm/nnrf-disc/nnrf-oauth2.                                |
| <b>isInterPlmnFqdn</b> | When isInterPLMNfqdn is true, it enables InterPLMN request routing. This means requests coming from foreign PLMNs to the SCP can be routed. SCP will perform intra-PLMN routing to local NRFs based on the interplmnFQDN. |


4. In the NRF SRV FQDN section, click the **Edit** icon to update the existing NRF SRV configuration.
5. Click **Save**.

### 4.2.5.1 Mapping NFInstanceId and ServiceInstanceId

Perform the following procedure to map the NRF FQDN InstanceId.

1. In the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP Features list, click **NFInstanceId And ServiceInstanceId Mapping**.
3. In the NFInstanceId And ServiceInstanceId Mapping section, click **Get** to retrieve the NRF FQDN and corresponding instanceId mapping details.

Figure 4-29 NFInstanceId And ServiceInstanceId Mapping

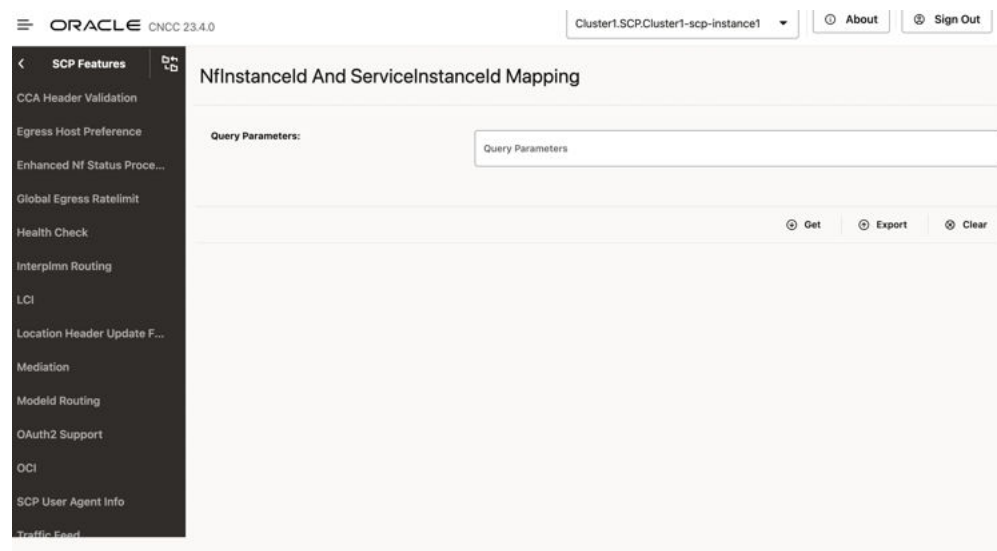

4. To retrieve, export, or clear the data, click the required buttons as described in the following table:

Table 4-29 Buttons and Descriptions of Mapping NRF FQDN InstanceId

| Button and Field Names  | Description                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------|
| <b>Query Parameters</b> | Allows to enter parameters to retrieve and update data required for mapping NRF FQDN InstanceId. |

Table 4-29 (Cont.) Buttons and Descriptions of Mapping NRF FQDN InstanceId

| Button and Field Names | Description                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| <b>Get</b>             | Retrieves the NRF FQDN and corresponding instanceId mapping details. You can modify this data using the <b>Edit</b> button. |
| <b>Export</b>          | Exports existing records in the JSON format.                                                                                |
| <b>Clear</b>           | Refreshes the existing screen by removing the data.                                                                         |

## 4.2.6 Configuring NRF

Perform the following procedure to configure NRF preferred by SCP for access token requests.

1. From the left navigation pane, click the SCP tab, and then click the NRF Configuration tab.
2. In the NRF CONFIGURATION section, click **Get** to retrieve NRF configuration information.

Figure 4-30 NRF Configuration

The screenshot shows the 'NRF CONFIGURATION' section of the console. At the top, there's a 'Query Parameters' input field. Below it, a toolbar contains four buttons: 'Get' (with a magnifying glass icon), 'Edit' (with a pencil icon), 'Export' (with a download icon), and 'Clear' (with an 'X' icon). Below the toolbar, there are two tabs: 'Response' and 'Request'. The 'Response' tab is active, showing a large, empty rectangular area for displaying data.

3. To edit, export, or clear the data, click the required buttons as described in the following table:

Table 4-30 Button and Field Descriptions of NRF Configuration

| Button and Field Names  | Description                                                                                             |
|-------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Query Parameters</b> | Allows to enter parameters to retrieve, add, and update NRF configuration data.                         |
| <b>Get</b>              | Retrieves NRF configurations. You can modify this data using the <b>Edit</b> button.                    |
| <b>Edit</b>             | Modifies any existing data by updating mandatory query parameters in the <b>Query Parameters</b> field. |
| <b>Export</b>           | Exports existing records in the JSON format.                                                            |
| <b>Clear</b>            | Refreshes the existing screen by removing the data.                                                     |

### Note

This configuration is only applicable to the OAuth service.

## 4.2.7 Configuring Upgrade and Rollback Event

Perform the following procedure to fetch upgrade and rollback event information.

1. From the left navigation pane, click the **SCP** tab, and then click the **Upgrade Status** tab.
2. On the Upgrade Status page, the following columns display upgrade and rollback events:

**Figure 4-31 Upgrade and Rollback Events**

**Table 4-31 Upgrade and Rollback Events**

| Column Name               | Description                                                                                                                                                                                                                                               |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Service Name</b>       | Displays the names of the services, such as SCPC-Audit, SCPC-Configuration, SCPC-Notification, and so on.                                                                                                                                                 |
| <b>Event</b>              | Displays the names of the upgrade and rollback events, such as Pre_Upgrade_Started, Pre_Upgrade_Completed, Pre_Upgrade_Failed, and so on.                                                                                                                 |
| <b>Source Release</b>     | Displays the source release version for performing upgrade and rollback. The convention to identify a release is as follows: <ul style="list-style-type: none"> <li>• 1.12.0 is identified as 101200</li> <li>• 1.14.0 is identified as 101400</li> </ul> |
| <b>Target Release</b>     | Displays the target release version for performing upgrade and rollback. The convention to identify a release is as follows: <ul style="list-style-type: none"> <li>• 1.15.0 is identified as 101500</li> <li>• 22.1.0 is identified as 221000</li> </ul> |
| <b>Creation Timestamp</b> | Displays the time of creation of the event, for example, creationTimestamp": "2021-05-26T01:17:15.000+00:00                                                                                                                                               |

## 4.2.8 OAuth2.0 Configurations

This section provides information about configuring access token granularity and requests for NF types or NF service instances.

You must log in to the CNC Console while performing the procedures described in the subsequent subsections. Using these procedures, you can perform the followings tasks:

- Configure access token granularity
- Configure OAuth2.0 Local PLMN

### 4.2.8.1 Configuring Access Token Granularity

Perform the following procedure to configure access token granularity and access token requests for NFType, specific NF, or NF instance ID.

1. From the left navigation pane, click the SCP tab, and then click the OAuth Services tab.
2. From the left navigation pane, click the **Access Token Granularity Configuration** tab.
3. In the Access Token Granularity Configuration section, click **Get** to retrieve access token granularity configurations data based on the query parameters.

**Figure 4-32 Access Token Granularity**

Access Token Granularity Configuration

Query Parameters:

Query Parameters

Get Add Edit Delete Export Clear

Response Request

```
{
  "ruleName": "Config1",
  "data": {
    "requesterPimnlds": [
      {
        "mcc": "325",
        "mnc": "13"
      },
      {
        "mcc": "326",
        "mnc": "14"
      }
    ]
  }
}
```

4. To add a new request, click **Add** and enter the request body information in the **Request** field.
5. Click **Submit**.  
The request body message appears in the **Response** field.
6. To edit, export, delete, or clear the data, click the required buttons as described in the following table:

**Table 4-32 Button and Field Descriptions of Access Token Granularity**

| Button and Field Names  | Description                                                                                                                        |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Query Parameters</b> | Allows to enter parameters to retrieve, add, and update access token granularity configuration data based on the query parameters. |
| <b>Get</b>              | Retrieves access token granularity configuration data. You can modify this data using the <b>Edit</b> button.                      |
| <b>Add</b>              | Adds new message requests in the <b>Request</b> field.                                                                             |
| <b>Edit</b>             | Modifies any existing data by updating mandatory query parameters in the <b>Query Parameters</b> field.                            |
| <b>Delete</b>           | Removes any message request.                                                                                                       |
| <b>Export</b>           | Exports existing records in the JSON format.                                                                                       |
| <b>Clear</b>            | Refreshes the existing screen by removing the data.                                                                                |



## 4.2.8.2 Configuring OAuth2.0 Local PLMN Required

Perform the following procedure to configure local PLMN OAuth2.0.

1. From the left navigation pane, click the SCP tab, and then click the OAuth Services tab.
2. From the left navigation pane, click the OAuth2Required Configuration tab.
3. In the OAuth2Required Configuration section, click **Get** to retrieve OAuth2Required configurations data based on the query parameters.

**Figure 4-33 OAuth2Required Configuration**

The screenshot shows the 'OAuth2Required Configuration' page. At the top, there's a 'Query Parameters' input field. Below it is a toolbar with icons for 'Get', 'Add', 'Edit', 'Delete', 'Export', and 'Clear'. The 'Response' tab is selected, showing a JSON object:

```
{
  "ruleName": "default",
  "data": {
    "nfType": "NF",
    "oauth2Required": false,
    "defaultScope": {
      "scopeSource": "NF-TYPE"
    }
  }
}
```

4. To add a new request, click **Add** and enter the request body information in the **Request** field.
5. Click **Submit**.

The request body message appears in the **Response** field.

6. To edit, export, delete, or clear the data, click the required buttons as described in the following table:

**Table 4-33 Button and Field Descriptions of OAuth2Required Configuration**


| Button and Field Names  | Description                                                                                                              |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Query Parameters</b> | Allows to enter parameters to retrieve, add, and update OAuth2Required configuration data based on the query parameters. |
| <b>Get</b>              | Retrieves OAuth2Required configuration data. You can modify this data using the <b>Edit</b> button.                      |
| <b>Add</b>              | Adds new message requests in the <b>Request</b> field.                                                                   |
| <b>Edit</b>             | Modifies any existing data by updating mandatory query parameters in the <b>Query Parameters</b> field.                  |
| <b>Delete</b>           | Removes any message request.                                                                                             |
| <b>Export</b>           | Exports existing records in the JSON format.                                                                             |
| <b>Clear</b>            | Refreshes the existing screen by removing the data.                                                                      |

## 4.2.9 Configuring Error Profile

Perform the following procedure to configure different error profiles, which can be used to build "ProblemDetails" sent in the response body to the consumer.


1. From the left navigation pane, click the **SCP** tab, and then click the **Error Profile** tab.

**Figure 4-34 Error Profile**

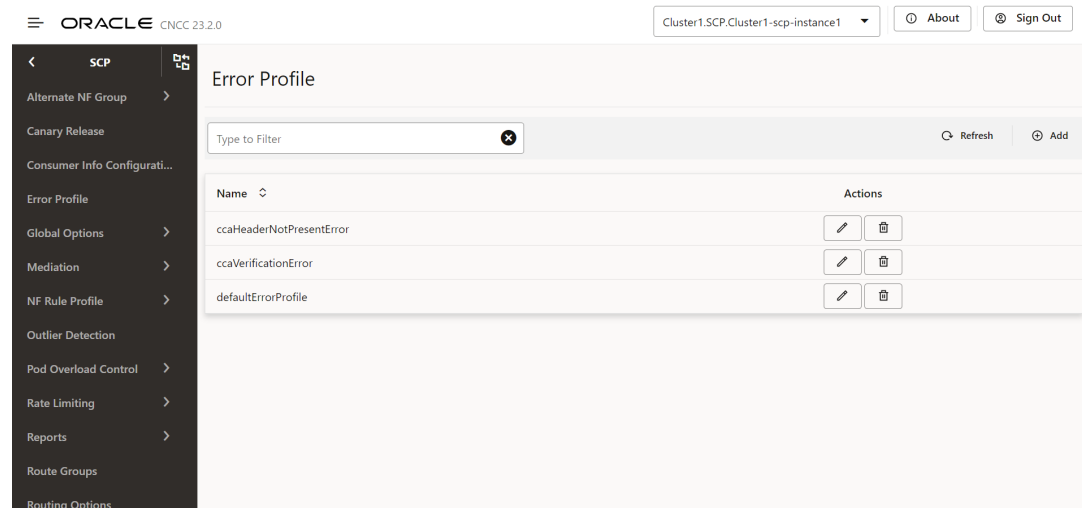

2. Click **Edit** icon from the **Actions** column for the error profiles that must be modified. The **Edit Error Profile** screen appears.

**Figure 4-35 Edit Error Profile**

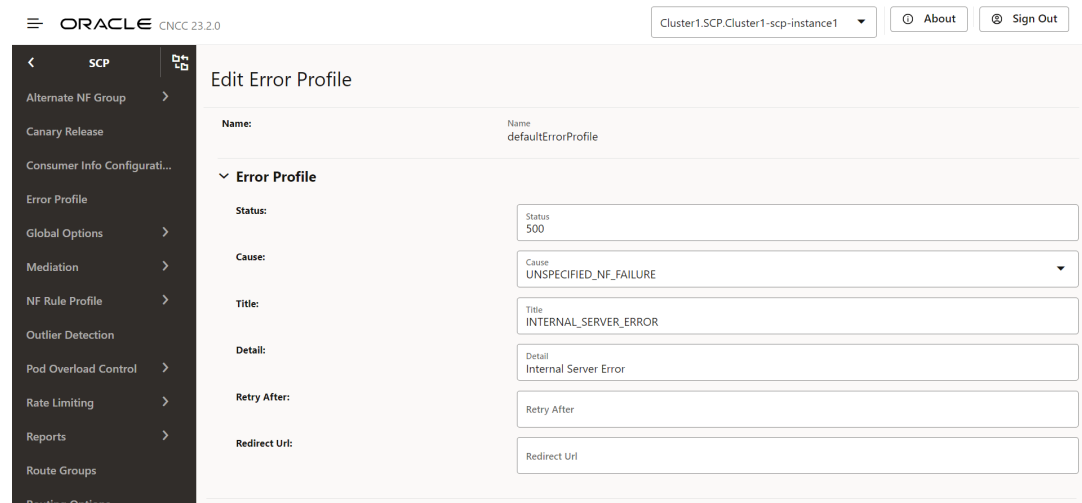

3. If the required cause is not available in the **Cause** drop-down list, select **CUSTOM** to customize the cause:

**Figure 4-36 Customize the Cause**

The screenshot shows the 'Edit Error Profile' interface in the CNC Console. On the left is a dark sidebar with a navigation menu. The 'Error Profile' option is highlighted. The main content area is titled 'Edit Error Profile' and shows the configuration for a profile named 'defaultErrorProfile'. The 'Error Profile' section is expanded, revealing several input fields: 'Status' is set to '500'; 'Cause' is a dropdown menu currently showing 'CUSTOM'; 'Custom Cause' is a text field containing 'Custom Cause'; 'Title' is 'INTERNAL\_SERVER\_ERROR'; 'Detail' is 'Internal Server Error'; 'Retry After' is an empty field; and 'Redirect Url' is an empty field. A 'Required' label is visible next to the 'Custom Cause' field.

4. Make the required modifications for the following parameters:

**Table 4-34 Edit Error Profile**

| Field        | Description                                                                                      |
|--------------|--------------------------------------------------------------------------------------------------|
| Status       | HTTP Status Code                                                                                 |
| Cause        | The list of error causes that are specific to the occurrence of the problem.                     |
| Custom Cause | User defined custom cause. This field will be used only if cause field value is set to "CUSTOM". |
| Title        | If this field is null, a standard HTTP status code description is added.                         |
| Detail       | If present, the same data is used; otherwise, the application can add it optionally.             |
| Retry After  | Indicates the number of seconds after client should retry.                                       |
| Redirect URL | Indicates the AbsoluteURL of the resource to which the message is redirected to.                 |

For information about configuring error profiles, see "Configuring Error Profile" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

5. Click **Save**.

## 4.2.10 Configuring Canary Release

Following is the procedure to configure Canary Release parameters:

1. From the left navigation menu, navigate to **SCP** and then select **Canary Release**.
2. Click **Edit** from the **Actions** column for the required service that must be modified. The **Edit Canary Release** Screen appears.

Figure 4-37 Canary Release

Canary Release

Global Options >

Mediation

Message Priority

NF Rule Profile

Rate Limiting >

Reports >

Routing Options

SCP Profile

Service Groups

Topology Source Info

Canary Release

Type to Filter

Refresh

| Service Name        | Canary Release Flag | API Full Version | Canary Traffic (%) | Actions |
|---------------------|---------------------|------------------|--------------------|---------|
| n5g-eir-eic         | false               | 2.0.0            | 5                  |         |
| namf-comm           | false               | 2.0.0            | 5                  |         |
| namf-evts           | false               | 2.0.0            | 5                  |         |
| namf-loc            | false               | 2.0.0            | 5                  |         |
| namf-mt             | false               | 2.0.0            | 5                  |         |
| nausf-auth          | false               | 2.0.0            | 5                  |         |
| nausf-someintention | false               | 2.0.0            | 5                  |         |

3. Make the required modifications for the following parameters:
- a. **Canary Release Flag:** Enable/Disable the flag using toggle.

b. **API Release Version:** Provide the release version of the API.

c. **Canary Traffic:** Set the value for the traffic that should be distributed to Canary Release.

Figure 4-38 Edit Canary Release

7.0

AboutSign Out

Edit Canary Release

Help

Service Name:

Service Name

n5g-eir-eic

Canary Release Flag:

☐

API Full Version:

API Full Version

2.0.0

Canary Traffic (%):

Canary Traffic (%)

5

Save

Cancel

For more information about the configuration parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

4. Click **Save**.
5. Click **Refresh** to view the updated values on the screen.


## 4.2.11 Configuring Global Options

Perform the following procedure to configure global options.

### Logging Config

1. From the left navigation menu, navigate to **SCP** and select **Global Options**.
2. Select **Logging Config**.
3. Click **Edit** from the top right side to edit or update Logging Config parameters.

**Figure 4-39 Logging Config**

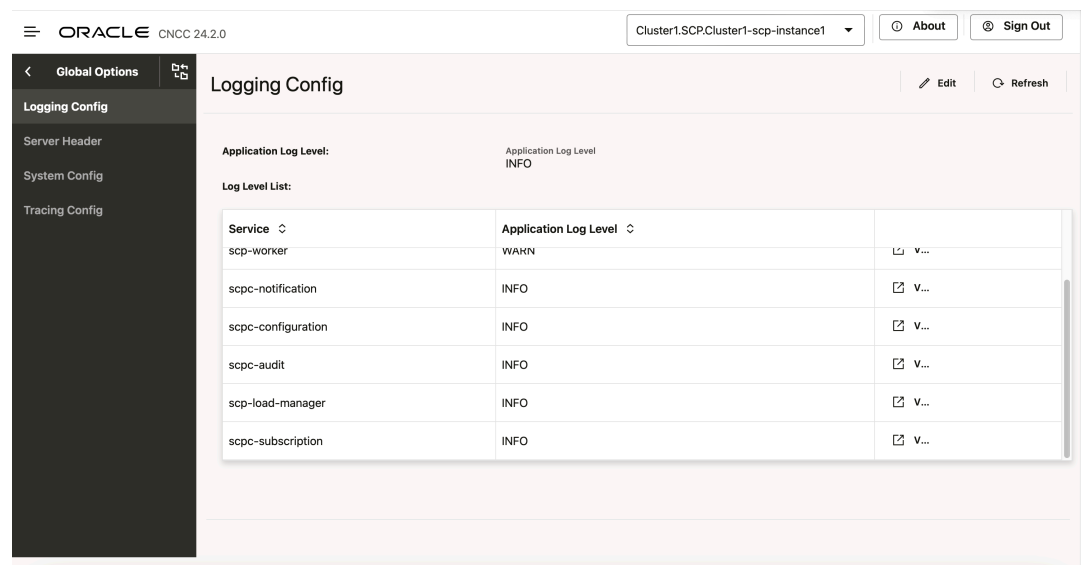


4. Select **Service Type** from the drop-down list to select any one of the following service type:
  - **scpc-audit**
  - **scpc-alternate-resolution**
  - **scpc-subscription**
  - **scpc-configuration**
  - **scpc-notification**
  - **scp-worker**
  - **scp-cache**
  - **scp-nrfproxy**
  - **scp-loadmanager**
5. Select the **Application Log Level** from the drop-down list to set the constraints of the log. The description of each logging level is as follows:

Table 4-35 Logging Level

| Logging Level | Description                                                                                                                                                                                                                                                                                     |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DEBUG         | A log level used for events considered to be useful during software debugging when more granular information is required.                                                                                                                                                                       |
| INFO          | The standard log level indicating that something happened, the application entered a certain state, and so on.                                                                                                                                                                                  |
| WARN          | Indicates that something unexpected happened in the application, a problem, or a situation that might disturb one of the processes. But that doesn't mean that the application has failed. The WARN level should be used in situations that are unexpected, but the code can continue the work. |
| ERROR         | The log level that should be used when the application reaches an issue preventing one or more functionalities from properly functioning.                                                                                                                                                       |
| TRACE         | The TRACE log level captures all the details about the behavior of the application. It is mostly diagnostic and is more granular and finer than DEBUG log level.<br><b>Note:</b> The scpc-notification, scpc-audit, and scpc-loadmanager microservices supports the TRACE log level.            |

For instance, when you select "scpc-notification" as the service type from the **Service** drop-down list, the **Application Log Level** drop-down list will display the "TRACE" log level.

Figure 4-40 TRACE Log Level

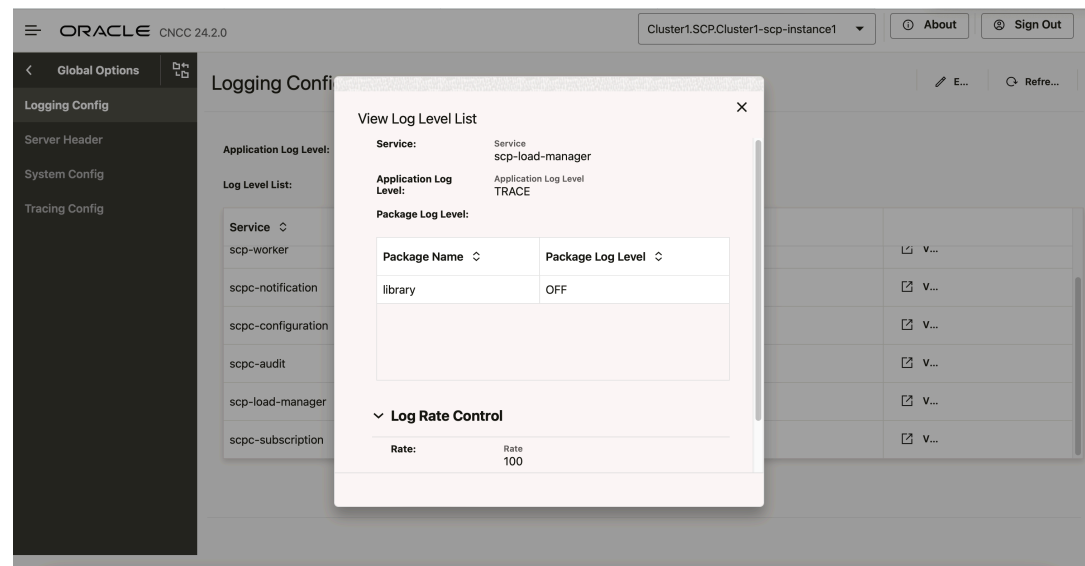

6. Click **Add** provided under **Package Log Level** section to specify the name of the package and its log level.
7. Click **Save**.

#### **Note**


You can also **Edit** and **Delete** the packages under **Package Log Level**.

## System Config

Perform the following procedure to edit the system config parameters.

1. From the left navigation menu, navigate to **SCP** and select **Global Options**.
2. Select **System Config**.
3. Click **Edit** from the top right side to edit or update **System Config** parameters.

**Figure 4-41 System Config**

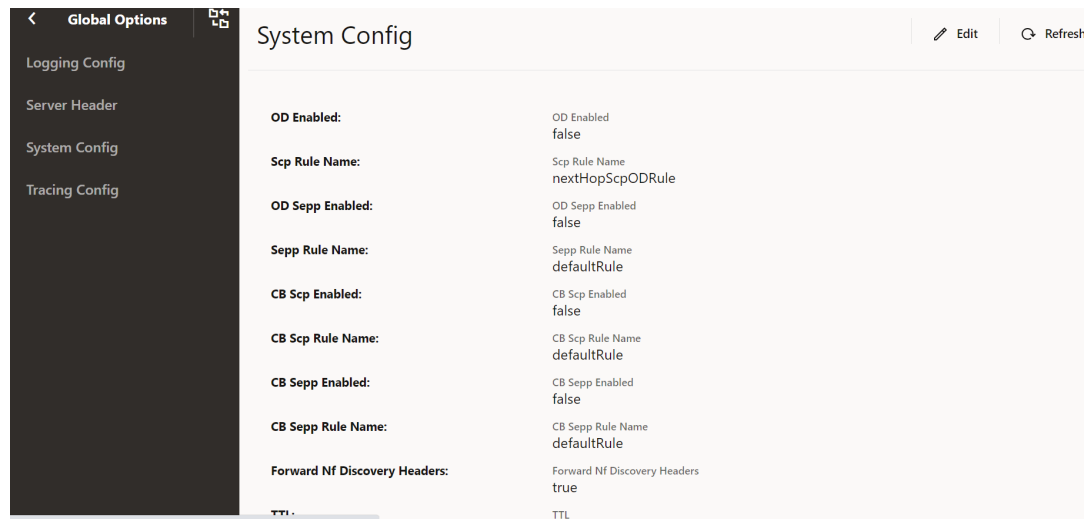

4. Update the attributes as described in "Configuring System Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Note


Ensure that **Forward Nf Discovery Headers** is set to true to forward discovery headers to Nexthop SCP as part of the Model D Indirect 5G SBI Communication feature.  
The default value is true.

5. Click **Save** after performing the modifications.

## Tracing Config

Perform the following procedure to edit tracing config options.

1. From the left navigation menu, navigate to **SCP** and select **Global Options**.
2. Select **Tracing Config**.
3. Click **Edit** from the top right side to edit or update **Tracing Config** options.

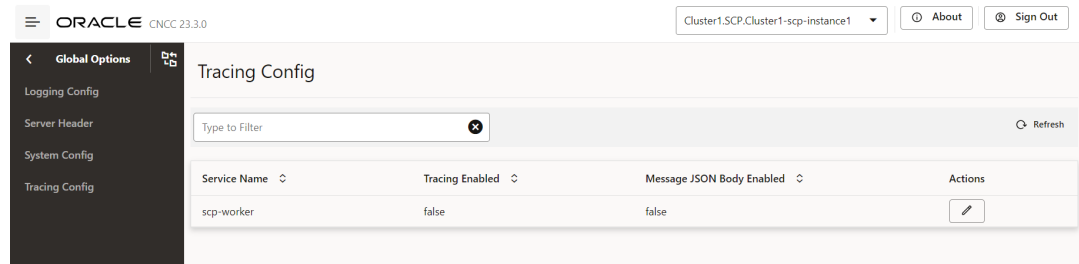**Figure 4-42 Tracing Config**

- Set the following switches as required:

- Tracing Enabled**
- Message JSON Body Enabled**

For information about tracing parameters, see "Updating HELM Configurable Parameters with REST APIs" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- Click **Save** after performing the modifications.

## 4.2.12 Mediation Configuration

This section outlines procedures for setting up trigger points to define filter criteria, configuring routing options, creating mediation rules, adjusting log levels, and defining user variables.

### 4.2.12.1 Configuring Mediation Trigger Point

Perform the following procedure to configure trigger points for defining the filter criteria for a message to decide whether to invoke mediation or not.

#### **Note**

For each trigger point configuration, the combination of `NfType`, `serviceName`, `httpMethods`, `messageType` and `triggerPoints` methods must be unique. No new records can be added with the same combination.

- From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
- To configure trigger points for defining the filter criteria for a message, in the left navigation pane, click the **Trigger Points** tab.
- In the Trigger Points section, click **Add**.
- In the Add Trigger Points section and add the fields as described in the following table:

**Table 4-36 Trigger Points Field Description**

| Field            | Description                                                                                                                                                                                                                                                                                                                                      |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Group Id</b>  | Enter the group ID for which the mediation configuration is required.<br>The Mediation configuration for a specific group is applicable to the mediation requests or responses received only from the same group. The HTTP Mediation service consumer NFs, which requires the same mediation rules, can be grouped together using this group ID. |
| <b>Rule Name</b> | Enter a unique rule name for each mediation configuration, which will serve as the primary key.                                                                                                                                                                                                                                                  |



Table 4-36 (Cont.) Trigger Points Field Description

| Field                           | Description                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Message Type</b>             | Select whether the message is a notification or a service request.<br>The allowed message types are svc-request-message, notification-message, or both notification-message, svc-request-message. |
| <b>Service Name</b>             | Select the service of NFType for which mediation configuration is required.                                                                                                                       |
| <b>NF Type</b>                  | Select the NFType for which mediation configuration is required.                                                                                                                                  |
| <b>Http Methods</b>             | Select the HTTP methods, such as GET, POST, PUT, PATCH, DELETE, and OPTIONS.                                                                                                                      |
| <b>Mediation Trigger Points</b> | Select trigger points to be enabled based on matches with one or more of the following: requestIngress, requestEgress, responseIngress, and responseEgress.                                       |
| <b>Match</b>                    | Indicates the list of match blocks to be satisfied for the rule to be activated.<br>Minimum number of blocks = 1<br>Maximum number of blocks = 20                                                 |
| <b>Add</b>                      | Option to add HTTP headers, JSON body, and User Defined Variables criteria.                                                                                                                       |

### Match Parameter Semantics

- **Match Blocks using OR Semantics:**  
The match wrapper consists of multiple match blocks, which are evaluated using **OR semantics**. This means that for the overall match wrapper to evaluate to true, it is sufficient for any one match block to satisfy the conditions.  
  
For example, if the match wrapper contains three match blocks, the entire wrapper will be considered a match as long as at least one of the blocks matches the conditions.
- **Internal Components of a Match Block (AND Semantics)**  
Each match block contains three components:
  - **Body:** A list of match conditions for body fields.
  - **Headers:** A list of match conditions for headers.
  - **userDefinedVariables (UDVs):** A list of match conditions for user-defined variables.

These components are evaluated using AND semantics:

  - All conditions within each component (for example, all body conditions, all header conditions, and all UDV conditions) must be satisfied.
  - Furthermore, all three components (body, headers, and userDefinedVariables) must match in order for the block to be considered a match.

5. In the Match section, click **Add**.  
The Add Match dialog box appears.
6. In the Header section, click **Add** to set the header details as follows:
  - **Name:** Enter a name for the header.
  - **Value:** Enter a value of the header.
  - **Match Type:** Select a range type from the **Match Type** drop-down.
7. In the Body section, click **Add** to set the JSON body details as follows:
  - **Name:** Enter a name for the body.
  - **Value:** Enter a value for the header.
  - **Match Type:** Select a range type from the **Match Type** drop-down.

8. In the User Defined Variables section, click **Add** to set the user defined variable details as follows:
  - **Name:** Select the user-defined variable names from the **Name** drop-down.
  - **Value:** Enter a value for the header.
  - **Match Type:** Select a range type from the **Match Type** drop-down.
  - In the Range section, if the header type has a numeric value, enter the range of that value in **Start** and **End** fields.
  - Click **Remove** to discard the changes made to the Range section.
9. In the Action section, select the action type from the **Action Type** drop-down. This field allows you to select the action for the trigger point rules that match the configured trigger point rules setup. The allowed values are `forwardToMediationService` and `setTriggerPointsInvocation`.

The significance of `setTriggerPointInvocation` is to avoid extra SCP-Worker to mediation service hop at `requestIngress` or `requestEgress` trigger points for the scenarios where response message mediation is required based on request message content.

For more information, see the "Configuring Mediation Trigger Point" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
10. In the **Trigger Point List**, select the list of trigger points to be invoked for matching the configured trigger point rule.

For more information about the order of invocation, see the "Configuring Mediation Trigger Point" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

#### Note

This is only applicable for Action Type = `setTriggerPointsInvocation`. Additionally, the first value in the `triggerPointList` should not precede the first value in the parent `triggerPoints`.

Example (not allowed)  
`triggerPoints: ["requestEgress"], "action": { "actionType": "setTriggerPointsInvocation", "triggerPointList": [ "requestIngress" ] }`

In this example, `"requestIngress"` is listed after `"requestEgress"`, which violates the rule that the first trigger point in the `triggerPointList` should not occur before the first trigger point in the parent `triggerPoints`.

11. In the Trigger Points section, click **Edit** and configure the fields as required.

Figure 4-43 Edit Mediation Trigger Points

The screenshot shows the 'Edit Mediation Trigger Points' configuration page. On the left is a navigation menu with options: Trigger Points, Routing Options, Mediation Rules Configuration..., Log Level Configuration, and User Defined Variables. The main area contains the following fields:

- Group ID:** group-1
- Rule Name:** rule-1
- Message Type:** notification-message (selected), with a link to view request-message.
- Service Name:** mediation
- NF Type:** UDM
- HTTP Methods:** POST (selected), PUT (link)
- Mediation Trigger Points:** requestprogress (selected)
- Match:** A table with columns: Header, Body, User Defined Variables, and an 'Add' button. The 'User Defined Variables' column contains '[object Object]'.
- Action:**
  - Action Type:** setTriggerPointInvocation
  - Trigger Point List:** requestprogress (selected)

At the bottom right are 'Save' and 'Cancel' buttons.

12. Click **Save** to save the changes.
13. Click **Cancel** to reset all the fields.

## 4.2.12.2 Configuring Routing Options for Mediation

Perform this procedure to configure routing options with Mediation.

1. From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
2. On Mediation tab, click the **Routing Options** subtab.
3. In the Routing Options section, click **Edit**.

The Edit Routing Options screen appears.

Figure 4-44 Editing Routing Options

The screenshot shows the 'Edit Routing Options' configuration page. On the left is a navigation menu with options: Trigger Points, Routing Options, Mediation Rules Configuration..., Log Level Configuration, and User Defined Variables. The main area contains the following fields:

- App Name:** mediation
- Routing Options:**
  - Retry:** ☒
  - Max Retry Attempts:** 1
  - Response Timeout:** 1
- Exception Error Responses:**

| Status Code       | Action              | ⊕ Add           |
|-------------------|---------------------|-----------------|
| DEFAULT           | continue_processing | ✎ Edit ✖ Delete |
| MSGDCODEFAILURE   | continue_processing | ✎ Edit ✖ Delete |
| MAXHRSIZEEXCEEDED | continue_processing | ✎ Edit ✖ Delete |

4. In the Edit Routing Options section, set **Retry** to true to enable retry attempt.
5. In the **Max Retry Attempts** field, enter a value to set the number of retry attempts. Minimum value is 1, Maximum value is 10.
6. In the **Response Timeout** field, enter a time interval to respond to a message request. This value must be in seconds.

7. In the Exception Error Responses section, click **Add** to add exception error responses.

This option enables you to send an error message to the consumer NF or process the message request to the producer NF when the Mediation service is unavailable. This option specifies how exceptions should be handled. In the Exception Error Responses of Routing Options, three exception configurations will be created by default during deployment. These configurations will include the status codes DEFAULT, MSGDECODEFAILURE, and MAXHDRSIZEEXCEEDED, with the action set to continue\_processing. This means that if an exception occurs during mediation invocation, the process will continue. To change this behavior, the user must create their own exception configuration by specifying actions for specific status codes.

8. In the Add Exception Error Responses dialog box, configure the fields as described in the following table:

**Table 4-37 Add Exception Error Responses**

| Field                    | Description                                                                                                                                                                                                                                                                                                                   |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Status Code</b>       | Indicates the list of status codes that matches with the status code received from the application, the required action specified by action field is taken.<br>This value can be any HTTP Status Codes, HTTP Status with other defined custom status (RESPONSE_TIMEOUT and CONNECTION_FAILURE)                                |
| <b>Action</b>            | Indicates the action to be taken when the above mentioned status code is received.<br>It can have the following values: <ul style="list-style-type: none"> <li>• send_error_response: Sends the error code to the consumer NF.</li> <li>• continue_processing: Continues processing the message in case of errors.</li> </ul> |
| <b>Error Code</b>        | Indicates configurable error codes to be sent by SCP to consumer NFs.<br>It is a valid HTTP status code or allowed custom code.                                                                                                                                                                                               |
| <b>Error Cause</b>       | Indicates the error cause that is specific to the occurrence of the problem.                                                                                                                                                                                                                                                  |
| <b>Error Title</b>       | Indicates the title of the error.                                                                                                                                                                                                                                                                                             |
| <b>Error Description</b> | Indicates an explanation specific to the occurrence of the problem.                                                                                                                                                                                                                                                           |
| <b>Retry After</b>       | Indicates the retry interval.                                                                                                                                                                                                                                                                                                 |
| <b>Redirect Url</b>      | Indicates the AbsoluteURL of the resource to which the message is redirected to.                                                                                                                                                                                                                                              |


9. Click **Save**.

### 4.2.12.3 Configuring Mediation Rules

Perform this procedure to configure mediation rules.

1. From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
2. On Mediation tab, click the **Mediation Rules Configuration** subtab.

The Mediation Rules Configuration screen with a list of rules saved in database appears.

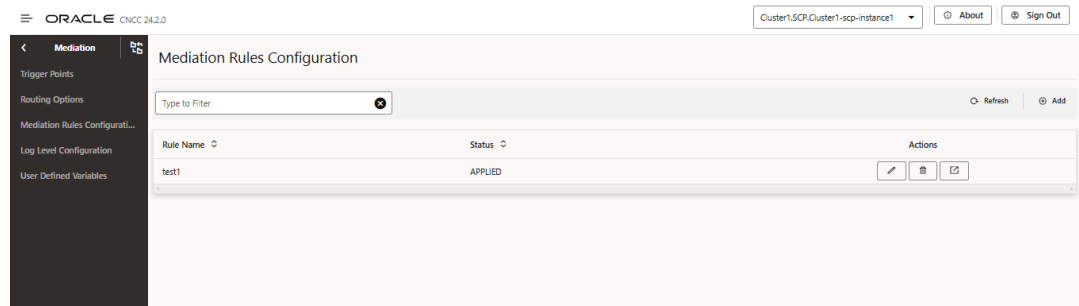**Figure 4-45 Mediation Rules Configuration**

3. Click the **View** icon to view the mediation rules.
4. Click the **Add** to create a mediation rule.

The Add Mediation Rule screen allows you to configure the fields to create new rules as described in the following table:

**Table 4-38 Add Mediation Rules**

| Field                 | Description                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rule Name</b>      | Indicates the name of the rule.<br>This value should be unique.                                                                                                                                                                                                                                                                                                                           |
| <b>Format</b>         | Indicates the Format in which the rules are defined, such as DRL.                                                                                                                                                                                                                                                                                                                         |
| <b>Status</b>         | Indicates the status of the rule.<br>It can have the following values: <ul style="list-style-type: none"> <li>DRAFT</li> <li>APPLIED</li> </ul> The status must always be in DRAFT to create a new rule.                                                                                                                                                                                  |
| <b>Mediation Mode</b> | Indicated whether the rule applies to mediation active or mediation test. <ul style="list-style-type: none"> <li>Mediation Active allows actual messages to be manipulated according to configured mediation rules.</li> <li>Mediation Test executes the mediation rule on message copy instead of the actual message and verifies the behavior of the mediation rule.</li> </ul>         |
| <b>Code</b>           | Indicates the configurable drool expression that matches the request/response headers and body sent by SCP.<br>For example, <pre> package com.oracle.cgbu.ocmediation.nfmediation; import com.oracle.cgbu.ocmediation.factdetails.Request; dialect "mvel" rule "newRuleTest" when   req : Request(headers.has("header") == true) then   req.headers.add("NewHeader", "132465") end </pre> |
| <b>State</b>          | Indicates the state. The value of State must be SAVE to create a new rule. For more information, see <a href="#">Table 3-32</a>                                                                                                                                                                                                                                                           |

**Note**

Special characters are not supported and can lead to a compilation error.

- Click the **Edit** icon to edit the existing rule.

Add a Mediation Rule with user-defined variables that have not been configured.

**Note**

User-defined variables must be configured before they can be used in a mediation rule.

The Edit Mediation Rule screen allows you to configure the fields as described in the following table:

**Table 4-39 Edit Mediation Rules**

| Field                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rule Name</b>      | Indicates the name of the rule.<br>This value should be unique.                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Format</b>         | Indicates the Format in which the rules are defined, such as DRL.                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Status</b>         | Indicates the status of the rule.<br>It can have the following values: <ul style="list-style-type: none"> <li>DRAFT</li> <li>APPLIED</li> </ul> The following fields are allowed to be modified in DRAFT status: <b>Mediation Mode</b> , <b>Code</b> , and <b>State</b> . The valid values for state are SAVE, CLONE, COMPILE, and APPLY.<br>The <b>Mediation Mode</b> can only be modified in APPLIED status. The valid values for state are SAVE, CLONE, or DRAFT. |
| <b>Mediation Mode</b> | Indicated whether the rule applies to mediation active or mediation test. <ul style="list-style-type: none"> <li>Mediation Active allows actual messages to be manipulated according to configured mediation rules.</li> <li>Mediation Test executes the mediation rule on message copy instead of the actual message and verifies the behavior of the mediation rule.</li> </ul>                                                                                    |
| <b>Code</b>           | Indicates the configurable drool expression that matches the request/response headers and body sent by SCP.                                                                                                                                                                                                                                                                                                                                                          |
| <b>State</b>          | Indicates the action to be applied to the rule.<br>The default value is SAVE<br><b>Note:</b> The DRAFT state is an invalid transition that could lead to an error.                                                                                                                                                                                                                                                                                                   |
| <b>New Rule Name</b>  | Indicates the new name of the rule.<br>This field appears when a CLONE state is selected.                                                                                                                                                                                                                                                                                                                                                                            |

**Note**

If the User Defined Variables field is not enabled, rules using userDefinedVariables can only be saved in a DRAFT state and cannot be moved to the COMPILE or APPLY state.

- Click the **Delete** icon to delete the existing rule.

The status of the rule must always be in DRAFT to delete an existing rule.

7. Click **Save**.

#### 4.2.12.4 Configuring Mediation Log Levels

Perform this procedure to configure the log levels of mediation.

1. From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
2. On Mediation tab, click the **Log Level Configuration** subtab.  
The Log Level Configuration screen with a list of default log level type of mediation and mediation-test service assigned during deployment appears.
3. Click the **View** icon to view the log level of mediation or mediation test service.
4. Click the **Edit** icon to edit or update the log level of mediation or mediation test service.  
The Edit Log Level Configuration screen allows you to configure the fields as described in the following table:

**Table 4-40 Edit Log Level Configuration**

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Service Type</b>          | Indicates the name of the type of service. For examples, mediation and mediation-test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Application Log Level</b> | Indicates the type of log level.<br>The following are the supported log levels: <ul style="list-style-type: none"> <li>• <b>WARN</b>: Designates potentially harmful situations.</li> <li>• <b>INFO</b>: Designates informational messages that highlight the progress of the application at coarse-grained level.</li> <li>• <b>ERROR</b>: Designates error events that might still allow the application to continue running.</li> <li>• <b>DEBUG</b>: Designates fine-grained informational events that are most useful to debug an application.</li> </ul> The default value is <b>WARN</b> . |
| <b>Package Log Level</b>     | Indicates the package level log information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Log Rate Control</b>      | Indicates the log rate control information.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

5. Select the application log level from the **Application Log Level** drop-down list to collect the logs as per the requirement.
6. Click **Save** to update the log level of service.

#### Package Log level Configuration

To update the package level information, perform the following:

1. On the Package Log level section, click the **EDIT** icon next to the package name.  
The Edit Package Log Level screen allows you to configure the fields as described in the following table:

**Table 4-41 Edit Package Log Level**

| Field               | Description                                                                                                                                                                                                                                                            |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Package Name</b> | Indicates the name of the package. It should be a valid library name. <ul style="list-style-type: none"> <li>• The valid package names are org, io, springfox, com.zaxxer, reactor, validator, and library.</li> <li>• The default package name is library.</li> </ul> |

Table 4-41 (Cont.) Edit Package Log Level

| Field                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Package Log Level</b> | <p>Indicates the type of package log level.<br/>The following are the supported log levels:</p> <ul style="list-style-type: none"> <li>• <b>WARN:</b> Designates potentially harmful situations.</li> <li>• <b>INFO:</b> Designates informational messages that highlight the progress of the application at a coarse-grained level.</li> <li>• <b>ERROR:</b> Designates error events that might still allow the application to continue running.</li> <li>• <b>DEBUG:</b> Designates fine-grained informational events that are most useful to debug an application</li> <li>• <b>OFF:</b> Disables the log rate.<br/>The default value is OFF</li> </ul> |

2. Edit the package name and Package Log Level from the drop-down menu and click **Save**.

### Log Rate Control Configuration

To configure the average number of logs allowed per second, perform the following:

1. The Log Rate Control section allows you to configure the fields as described in the following table:

Table 4-42 Log Rate Control

| Field            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rate</b>      | <p>Indicates the average number of logs allowed per second.</p> <ul style="list-style-type: none"> <li>• The default rate is 1.</li> <li>• The range is in between 1 and 10000</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Log Level</b> | <p>Indicates the type of log level where rate control is applied.<br/>The following are the supported log levels:</p> <ul style="list-style-type: none"> <li>• <b>WARN:</b> Designates potentially harmful situations.</li> <li>• <b>INFO:</b> Designates informational messages that highlight the progress of the application at a coarse-grained level.</li> <li>• <b>ERROR:</b> Designates error events that might still allow the application to continue running.</li> <li>• <b>DEBUG:</b> Designates fine-grained informational events that are most useful to debug an application</li> <li>• <b>OFF:</b> Designates to turn off logging.<br/>The default value is OFF</li> </ul> |


2. Select the log level from the **Log Level** drop-down to change the log level type, and click **Save**.

## 4.2.12.5 Configuring Mediation Support for User Defined Variables

Perform this procedure to configure the user defined variables of mediation.

1. From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
2. On Mediation tab, click the **User Defined Variables** subtab.  
The **User Defined Variables** screen displays a list of user-defined variables saved in the database. A user-defined variable can be edited, deleted, or viewed.

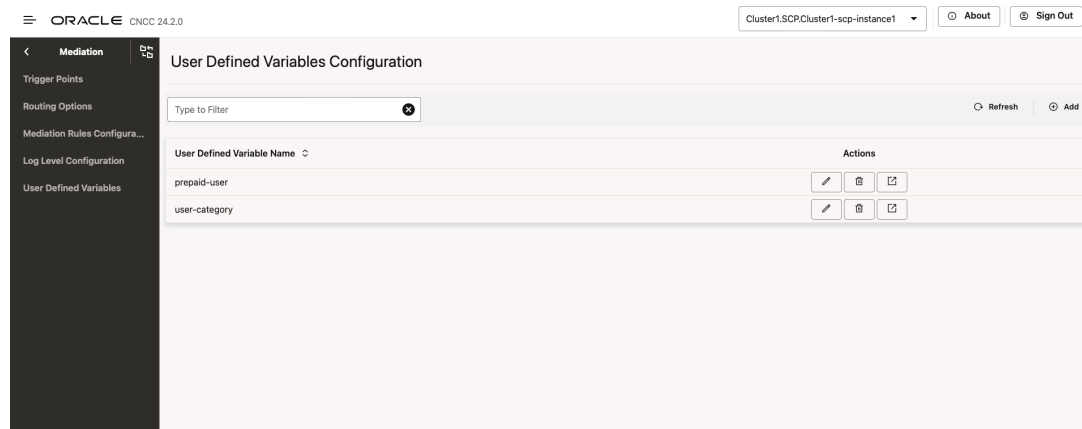

**Figure 4-46 User Defined Variables Configuration**

3. Click the **View** icon to view the configured user-defined variable.
4. Click the **Add** to create a user-defined variable.  
The Add User Defined Variable screen allows you to configure the fields to create user defined variables to configure rules as described in the following table:

**Table 4-43 Add User Defined Variable**

| Field                             | Description                                                                                                                                                                                                           |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>User Defined Variable Name</b> | This field is used to specify the name of the user-defined variable. Ensure the name is unique.                                                                                                                       |
| <b>Data</b>                       | This section allows to define and configure user-defined variable data-related settings.                                                                                                                              |
| <b>Type</b>                       | This field is used to specify the data type (for example, STRING, LONG, JSON, BOOLEAN).                                                                                                                               |
| <b>Size</b>                       | This field is used to define the size limit for the user-defined variable data. This field is conditional and required only when the type is STRING or JSON. The allowed size range is between 1 and 1024 bytes only. |
| <b>Description</b>                | This field is used to provide a brief explanation for the data being defined.                                                                                                                                         |

**Note**

Ensure that no special characters are used.

5. Click the **Edit** icon to edit the configured user-defined variable.  
The Edit User Defined Variable screen allows you to configure the fields as described in the following table:

**Table 4-44 Edit User Defined Variable**

| Field                             | Description                                                                                                                                                                                     |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>User Defined Variable Name</b> | This field specifies the name of the user-defined variable.<br><b>Note:</b> The name of the user-defined variable cannot be edited.                                                             |
| <b>Data</b>                       | This section allows users to define and configure user-defined variable data-related settings.                                                                                                  |
| <b>Type</b>                       | This field specifies the data type (for example, STRING, LONG, JSON, BOOLEAN).                                                                                                                  |
| <b>Size</b>                       | This field is used to define the size limit for the data. This field is conditional and required only when the type is STRING or JSON. The allowed size range is between 1 and 1024 bytes only. |

Table 4-44 (Cont.) Edit User Defined Variable

| Field       | Description                                                         |
|-------------|---------------------------------------------------------------------|
| Description | This field provides a brief explanation for the data being defined. |

**Note**

If a user-defined variable is **APPLIED** in any rules or configured at trigger points, it cannot be deleted. In this case, the only editable field is the **size**, which can only be incremented.

- Click **Save** to update changes.  
Users can use these user-defined variables in SCP trigger points and mediation rules.

## 4.2.13 Configuring NF Rule Profile

Perform the following procedure to configure NF Rule Profile parameters.

**Note**

When the learning source is set to "Local", users can modify the 5G NF profile regardless of whether it was learned from NRF (source='NRF') or configured statically (source='Local'). By setting the source to Local, the system does not delete already determined profiles.

- From the left navigation, navigate to **SCP**, and then click **NF Rule Profile**.
- To add or configure an NF rule profile, click the **NF Rule Profile Configuration** tab in the left navigation pane.

Figure 4-47 NF Rule Profile Configuration

| NF Instance Id                      | NF Type | NF Status  | FQDN                                      | Actions |
|-------------------------------------|---------|------------|-------------------------------------------|---------|
| 3fa2bbc-6e4a-2828-a507-a14ef8e1bc7b | NRF     | REGISTERED |                                           |         |
| 3fa2bbc-6e4a-2828-a507-b14ef8e1bc7a | NRF     | REGISTERED |                                           |         |
| 3fa3bbc-6e4a-2828-a507-a14ef8e1bc6a | NRF     | REGISTERED |                                           |         |
| 3fa3bbc-6e4a-2828-a507-a14ef8e1bc6b | NRF     | REGISTERED |                                           |         |
| 6fa1bbc-6e4a-2828-a507-a14ef8e1bc5a | NRF     | REGISTERED |                                           |         |
| 6fa1bbc-6e4a-2828-a507-a14ef8e1bc5b | NRF     | REGISTERED |                                           |         |
| 6fa1bbc-6e4a-4454-a507-a14ef8e1bc5e | SCP     | REGISTERED | ocscp-scp-worker.scpssc.svc.cluster.local |         |

- Click **Add** to add NF rule profile.

**Figure 4-48 Add NF Rule Profile**

| Add NF Rule Profile Configuration |                                              |
|-----------------------------------|----------------------------------------------|
| NF Instance Id:                   | <input type="text" value="NF Instance Id"/>  |
| NF Type:                          | <input type="text" value="NF Type"/>         |
| NF Status:                        | <input type="text" value="NF Status"/>       |
| FQDN:                             | <input type="text" value="FQDN"/>            |
| Inter PLMN FQDN:                  | <input type="text" value="Inter PLMN FQDN"/> |
| IPv4 Addresses:                   | <input type="text" value="IPv4 Addresses"/>  |
| IPv6 Addresses:                   | <input type="text" value="IPv6 Addresses"/>  |
| Priority:                         | <input type="text" value="Priority"/>        |
| Capacity:                         | <input type="text" value="Capacity"/>        |
| Load:                             | <input type="text" value="Load"/>            |

4. Add the following parameters for all the NF Info:
  - **Group Id:** Identity of the NF info.
  - **Routing Indicators:** List of Routing Indicator information.
  - Click **Add** to add the SUPI Ranges.
  - Click **Save** to save the SUPI Ranges.
  - Click **Remove** if you want to remove the NF Info.
  - Click **Add** to add the NF info details.
5. Click **Save** to save the NF Rule Info.
6. Click **Refresh** to view the updated values on the screen.
7. To configure a local PLMN, in the PLMN List section, click **Add** and enter the required Mobile Country Code (MCC) and Mobile Network Code (MNC) values in the displayed fields.

#### Modifying IP Addresses

Perform the following procedure to edit the IP addresses which are present under NF service level:

1. In the NF Service section, to modify any NF service, click the corresponding **Edit** icon.
2. In the IP End Points section, click **Add** to add IP end points.

Figure 4-49 Adding IP End Points

**Add IP End Points** [X]

**IPv4Address:**

**IPv6Address:**

**Port:**

[Save] [Cancel]

3. Enter IP address in one of the following fields:

- **IPv4Address**
- **IPv6Address**


**Note**

The system displays an error message if you enter IP address in both the above mentioned fields.

For more information about **IPv4Address** and **IPv6Address** configurations, see "Configuring Route Groups" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

4. In the **Port** field, enter the port number.
5. Click the **Edit** icon to edit or add the API full versions.

Figure 4-50 Edit NF Services

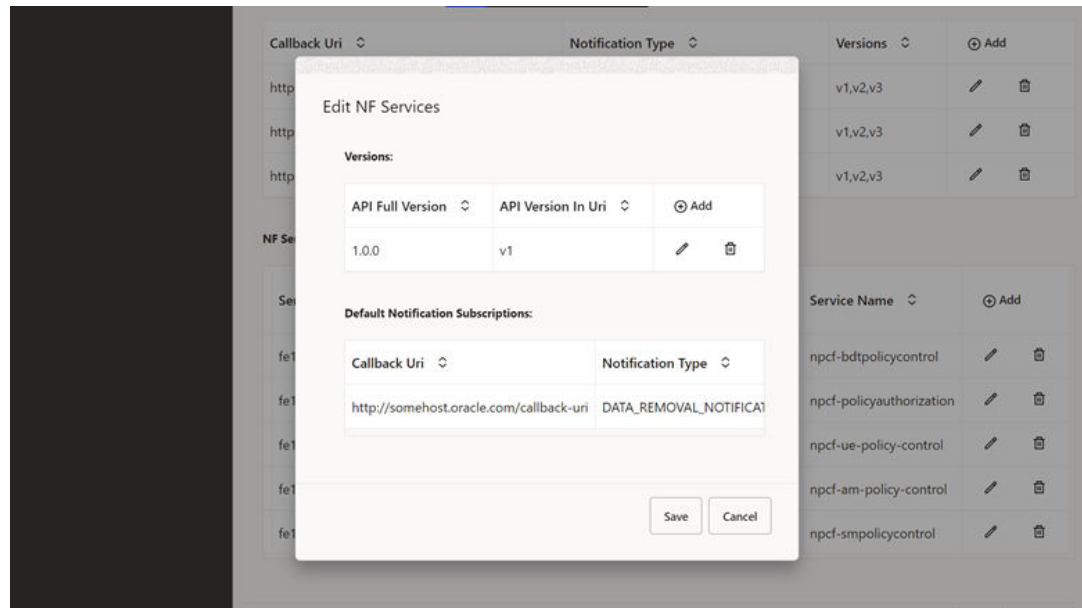

6. Click **Save** to save the NF Rule Info.

#### Viewing or Editing the Default Notification Subscriptions

Perform the following procedure to view or edit the default notification subscription which are present under NF service level or NF profile level:

#### ① Note

Users cannot modify values for profiles in Default Notification Subscription if the learning source is set to NRF. They can only view it. Editing is only possible when the learning source is set to "Local".

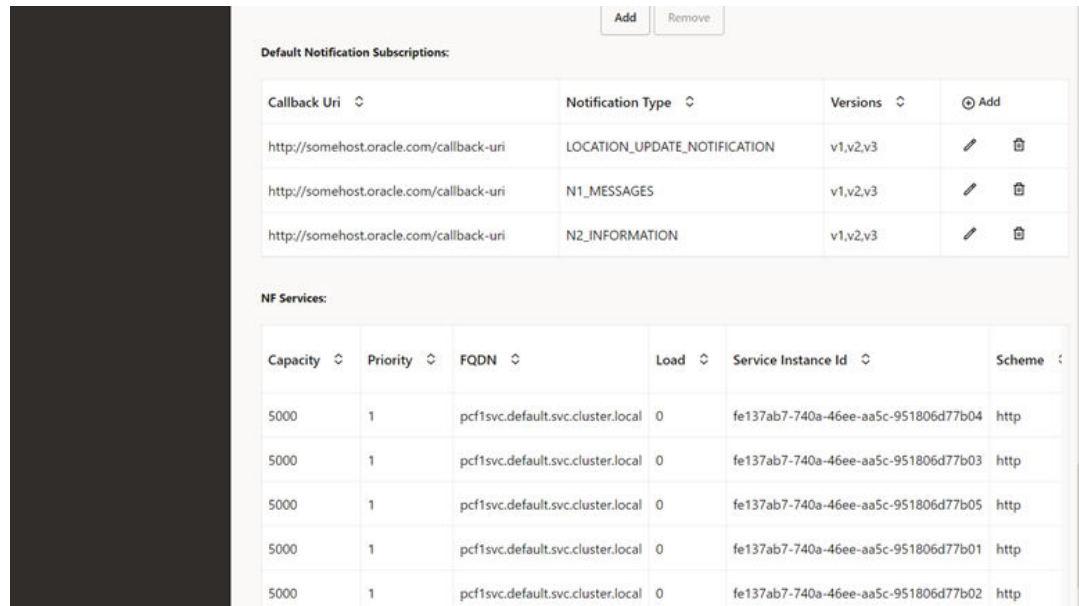
1. In the NF Rule Profile Configuration section, click **Edit** from Actions. The **Edit NF Rule Profile Configuration** screen appears.

Figure 4-51 Edit NF Rule Profile Configuration

### Edit NF Rule Profile Configuration

|                  |                                                              |
|------------------|--------------------------------------------------------------|
| NF Instance Id:  | NF Instance Id<br>7faf2bbc-6e4a-2828-a507-a14ef8e1bc7b       |
| NF Type:         | NF Type<br>UDM                                               |
| NF Status:       | NF Status<br>REGISTERED                                      |
| FQDN:            | FQDN                                                         |
| Inter PLMN FQDN: | Inter PLMN FQDN<br>nrfr2l2.5gc.mnc215.mcc410.3gppnetwork.org |
| IPV4 Addresses:  | IPV4 Addresses                                               |
| IPV6 Addresses:  | IPV6 Addresses                                               |
| Priority:        | Priority<br>10                                               |
| Capacity:        | Capacity<br>10000                                            |
| Load:            | Load                                                         |
| Locality:        | Locality<br>Loc2r2                                           |

2. In the Default Notification Subscription section, click the **Edit** icon for the required callback URI that must be modified. The **Edit Default Notification Subscription** screen appears.

**Figure 4-52 Default Notification Subscription**


The screenshot displays the CNC Console interface for managing Default Notification Subscriptions. It features two main sections: 'Default Notification Subscriptions' and 'NF Services'.

**Default Notification Subscriptions:**

| Callback Uri                            | Notification Type            | Versions | ⊕ Add |
|-----------------------------------------|------------------------------|----------|-------|
| http://somehost.oracle.com/callback-uri | LOCATION_UPDATE_NOTIFICATION | v1,v2,v3 |       |
| http://somehost.oracle.com/callback-uri | N1_MESSAGES                  | v1,v2,v3 |       |
| http://somehost.oracle.com/callback-uri | N2_INFORMATION               | v1,v2,v3 |       |

**NF Services:**

| Capacity | Priority | FQDN                              | Load | Service Instance Id                  | Scheme |
|----------|----------|-----------------------------------|------|--------------------------------------|--------|
| 5000     | 1        | pcf1svc.default.svc.cluster.local | 0    | fe137ab7-740a-46ee-aa5c-951806d77b04 | http   |
| 5000     | 1        | pcf1svc.default.svc.cluster.local | 0    | fe137ab7-740a-46ee-aa5c-951806d77b03 | http   |
| 5000     | 1        | pcf1svc.default.svc.cluster.local | 0    | fe137ab7-740a-46ee-aa5c-951806d77b05 | http   |
| 5000     | 1        | pcf1svc.default.svc.cluster.local | 0    | fe137ab7-740a-46ee-aa5c-951806d77b01 | http   |
| 5000     | 1        | pcf1svc.default.svc.cluster.local | 0    | fe137ab7-740a-46ee-aa5c-951806d77b02 | http   |

3. Make the required modifications for the following fields:

**Table 4-45 Default Notification Subscriptions**

| Attribute name       | Description                                                                                                                                                                                                                                                      |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Callback Uri         | This attribute contains a default notification endpoint to be used by a NF service producer towards an NF service consumer that has not explicitly registered a callback URI with the NF service producer, for example, as a result of an implicit subscription. |
| Notification Type    | Type of notification for which the corresponding callback URI is provided.                                                                                                                                                                                       |
| Versions             | API versions, for example, v1, are supported for the default notification type.                                                                                                                                                                                  |
| N1 Message Class     | If the notification type is N1_MESSAGES, this IE must be present to identify the class of N1 messages to be notified.                                                                                                                                            |
| N2 Information Class | If the notification type is N2_INFORMATION, this IE must be present to identify the class of N2 information to be notified.                                                                                                                                      |
| Binding              | When present, this IE contains the value of the binding indication for the default subscription notification, which is the value part of the 3gpp-Sbi-Binding header. See the note for details.                                                                  |

### Note

When delivering a notification for a default subscription to a specific NF consumer but the latter is not reachable, a NF service producer uses the binding indication for default subscription to reselect an alternative NF service consumer instance. For example, an AMF notifies corresponding uplink LPP or NRPPa messages through a default subscription to the LMF instance that previously sent downlink LPP or NRPPa messages during a location procedure. If the original LMF instance is not reachable, the AMF selects an alternative LMF instance using the binding indication and delivers the notification to the selected LMF instance.

**Figure 4-53 Edit Default Notification Subscriptions**

4. Click **Save** to save the NF Rule Info.
5. Click **Refresh** to view the updated values on the screen.

#### 4.2.13.1 Fetching NF Rule Profile Data


Following is the procedure to retrieve a collection of NF rule profile data configured at SCP:

1. From the left navigation menu, navigate to **SCP** and then click **NF Rule Profile**.
2. To retrieve the default notification subscription data for a specific NF rule profile, click on the **NF Rule Profile Data** tab in the left navigation pane.
3. The NF Rule Profile Data screen is displayed as follows:

**Figure 4-54 NF Rule Profile Data**

4. Enter the **Query Parameters** in the field. These parameters may include NFType, ServiceName, NF instance ID, Maximum number of NF profiles (limit), or max-payload-size. For more information, see the "Configuring NF Topology Groups" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
5. Click **Get** to fetch the response data. The data is displayed in the **Response** pane.

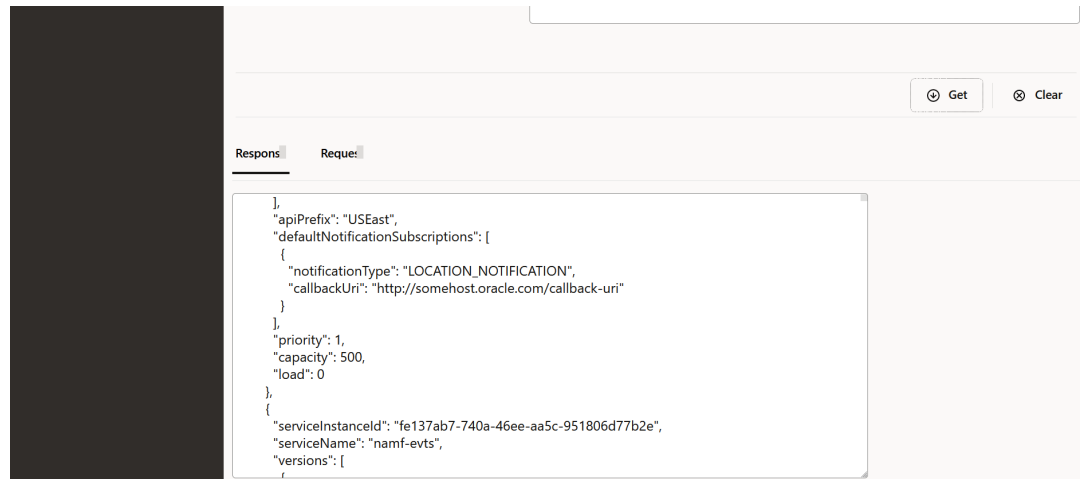

**Figure 4-55 Response data**

6. Click **Clear** to clear the response data.

## 4.2.14 Configuring SCP Profile

Following is the procedure to configure SCP Profile parameters:

### Editing SCP Profile

1. From the left navigation menu, navigate to **SCP** and then select **SCP Profile**.

Figure 4-56 SCP Profile

SCP Profile

Refresh

FQDN:

FQDN  
ocscp-scp-worker.scpsvc.svc.cluster.local

NF Instance Id:

NF Instance Id  
6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e

NF Status:

NF Status  
REGISTERED

NF Type:

NF Type  
SCP

NF Set Id List:

NF Set Id List  
setscpl1.scpset.5gc.mnc012.mcc345

Serving Scope:

Serving Scope  
Loc7,Loc8,Loc9,USEast

Locality:

Locality  
Loc7

NF Service Persistence:

NF Service Persistence  
false

SCP Info

SCP Prefix:

SCP Prefix  
scpPrefix

SCP Ports

Http:

Http  
8000

Custom Info

Serving Localities:

Serving Localities

Supported NRF Region or Set ID List:

Supported NRF Region or Set ID List  
setnrfl1.nrfset.5gc.mnc012.mcc345,setnrfl1.nrfset.5gc.mnc012.mcc345,setnrfl2.nrfset.5gc.mnc012.mcc345

Mate SCP Info List (Rel 16):

| Capacity | Priority | SCP FQDN                                   | SCP InstanceId                       | Mate SCP Localities |
|----------|----------|--------------------------------------------|--------------------------------------|---------------------|
| 500      | 5        | ocscp-scp-worker.scpsvc1.svc.cluster.local | 8faf1bbc-6e4a-4454-a507-a14ef8e1bc5e | Loc10               |
| 501      | 6        | ocscp-scp-worker.scpsvc2.svc.cluster.local | 8faf1bbc-6e4a-4454-a507-a14ef8e1bc5f | Loc11               |

Mate Site Info

- Click **Edit** under **NF Services** section. The **Edit SCP Profile** Screen appears. For more information about configuration parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

### Note

- To add a new location to Remaining Localities and Serving Localities, type the new location name, and then click **Enter**.
- Use **Edit** or **Delete** buttons available in the next column to update or delete the NF services.

### 4.2.15 Configuring Topology Source Info

Following is the procedure to configure Topology Group Info parameters:

1. From the left navigation menu, navigate to **SCP** and then select **Topology Source Info**.

Figure 4-57 Topology Source Info

Topology Source Info

Help

Type to Filter

Refresh

| NF Type           | Status | Actions |
|-------------------|--------|---------|
| 5G_EIR            | NRF    |         |
| AF                | NRF    |         |
| AMF               | NRF    |         |
| AUSF              | NRF    |         |
| BSF               | NRF    |         |
| CHF               | NRF    |         |
| CUSTOM_ORACLE_SCP | NRF    |         |
| GMLC              | NRF    |         |
| LMF               | NRF    |         |

2. Click **Edit** from the **Actions** column for the required service that must be modified. The **Edit Topology Source Info** Screen appears.
3. Update the **Status** of the specific **NF Type** in the **Edit Topology Source Info** as per your requirement.

Figure 4-58 Edit Topology Source Info

Edit Topology Source Info

Help

NF Type:

NF Type

5G\_EIR

Status:

Status

LOCAL

Save

Cancel


4. Click **Save** to save the **Topology Source Info**.
5. Click **Refresh** to view the updated values on the screen.

## 4.2.16 Fetching Routing Rules

Following is the procedure to retrieve a collection of routing rules configured at SCP:


1. From the left navigation menu, navigate to **SCP** and then select **Reports**.
2. Select **Routing Rules R16**. The **Routing Rules R16** screen is displayed as follows:

**Figure 4-59 Routing Rules R16**

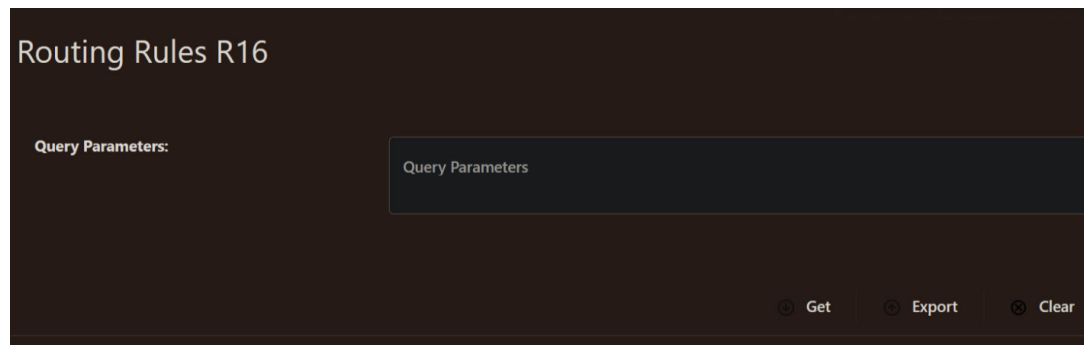

3. Enter the **Query Parameters** in the field.
4. Click **Get** to fetch the response data. The data is displayed in the **Response** pane.

**Figure 4-60 Response data**

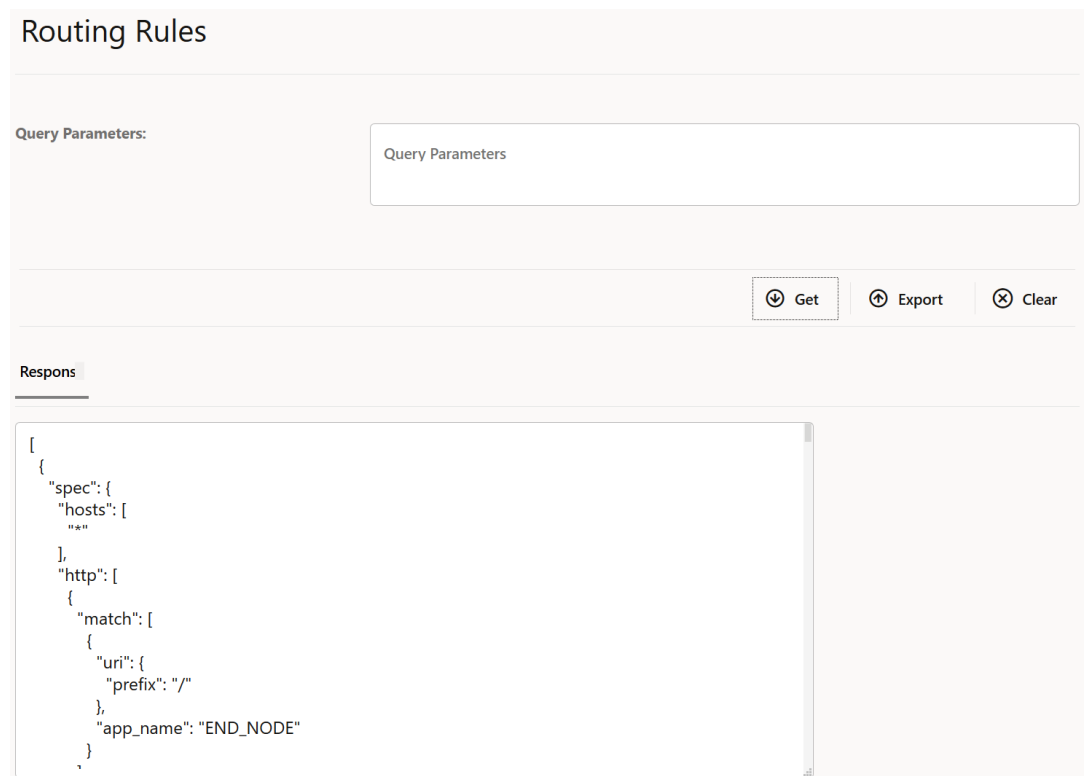

**Note**

In case the response data is above the configured display limit, a message is displayed stating "Response data has crossed the configured display limit (5 MB), please click on **Export** to download it as a file.". Currently, the display limit cannot be modified, it is set to 5 MB.


5. Click **Export** to download of the response data file.
6. Click **Clear** to clear the response data.

## 4.2.17 Configuring Ingress Rate Limiting

Following is the procedure to configure ingress rate limiting parameters:

1. From the left navigation menu, navigate to **SCP** and then select **Rate Limiting**.
2. Select **Ingress Rate Limiting**. The screen is displayed.

**Figure 4-61 Ingress Rate Limiting**

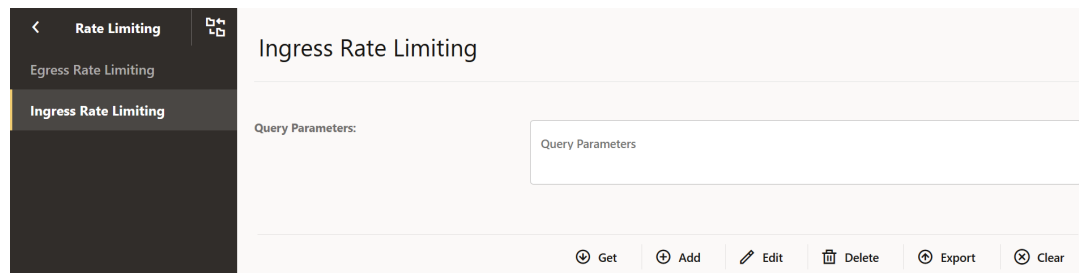

3. Enter the **Query Parameters** in the field.
4. Click **Get** to fetch the response data. The data is displayed in the **Response** pane.

**Note**


In case the response data is above the configured display limit, a message is displayed stating "Response data has crossed the configured display limit (5 MB), please click on **Export** to download it as a file.". Currently, the display limit cannot be modified, it is set to 5 MB.

5. Click **Add** to add the ingress rate limiting configuration using the Request Body.
6. Click **Edit** to edit the Request Body of the ingress rate limiting configuration.
7. Click **Delete** to delete the ingress rate limiting configuration based on the query parameters.

## 4.2.18 Configuring Egress Rate Limiting

Following is the procedure to configure egress rate limiting parameters:

1. From the left navigation menu, navigate to **SCP** and then select **Rate Limiting**.
2. Select **Egress Rate Limiting**. The screen is displayed.

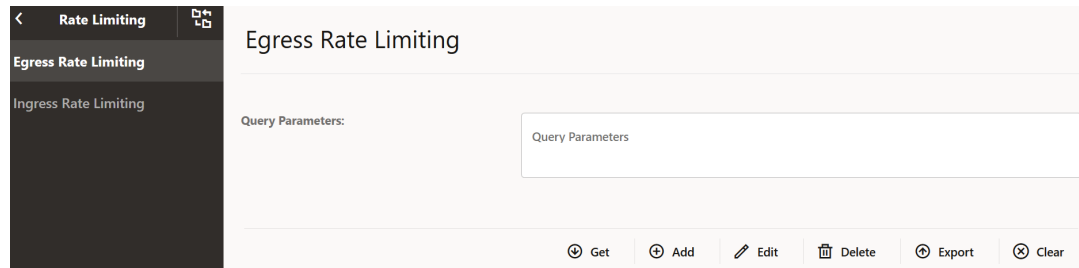**Figure 4-62 Egress Rate Limiting**

3. Enter the **Query Parameters** in the field.
4. Click **Get** to fetch the response data. The data is displayed in the **Response** pane.

**Note**

In case the response data is above the configured display limit, a message is displayed stating "Response data has crossed the configured display limit (5 MB), please click on **Export** to download it as a file.". Currently, the display limit cannot be modified, it is set to 5 MB.

5. Click **Add** to add the egress rate limiting configuration using the Request Body.
6. Click **Edit** to edit the Request Body of the egress rate limiting configuration.
7. Click **Delete** to delete the egress rate limiting configuration based on the query parameters.

## 4.2.19 Configuring Server Header

Perform the following procedure to configure server header parameters to include server header in the producer NF error responses.

1. From the left navigation pane, click the **SCP** tab, and then click the **Global Options** tab.
2. Click the **Server Header** tab.
3. In the Server Header section, click **Edit**.

The Edit Server Header screen appears.

**Figure 4-63 Edit Server Header**

**Edit Server Header**

Enable Enhance Server Header Behavior: ☐

Side Car Proxy Server Header:

Add Server Header In Producer Response: ☐

Enable Enhance Server Header Behavior V2: ☐

Side Car Proxy Status Code:

4. To enable the enhanced server header behavior introduced in SCP 1.15.0, set **Enable Enhance Server Header Behavior** to true.  
By default, this option is disabled. For information about server header configurations, see "Configuring Server Header" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
5. In the **Side Car Proxy Server Header** field, enter the strings to identify server header values if error response is generated by side car proxy.  
A sample value is envoy.
6. To enable addition of server header in producer NF generated error responses, set **Enable Enhance Server Header Behavior** to true.  
By default, this option is disabled.
7. To enable the enhanced server header behavior introduced in SCP 23.1.0, set **Enable Enhance Server Header Behavior V2** to true.
8. Enter status codes in the **Side Car Proxy Server Header Status Code** field.
9. Click **Save**.

## 4.2.20 Configuring Pod Overload Control Policies

Perform the following procedure to configure pod overload policies to control and discard request messages sent to scp-worker.

For more information about pod overload policies, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

1. From the left navigation pane, navigate to **SCP** and click **Pod Overload Control**, and then click **Worker**.
2. To configure Pod Overload Control Policy, in the left navigation pane, click the **Overload Control Policy** tab.
  - a. In the Overload Control Policy section, click **Get** to retrieve the scp-worker Pod Overload Control Policy data configured based on the threshold level.

**Figure 4-64 Overload Control Policy**

- b. To add a new request, click **Add** and enter the request body information in the **Request** field.
- c. Click **Submit**.  
The request body message appears in the **Response** field.
- d. To edit, export, delete, or clear the data, click the required buttons as described in the following table:

**Table 4-46 Buttons and Field Descriptions on Overload Control Policy page**

| Button and Field Names  | Description                                                                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Query Parameters</b> | Allows to enter parameters to retrieve, add, and update different pod overload policies data.                                                    |
| <b>Get</b>              | Retrieve the scp-worker Pod Overload Policy data configured based on the threshold level. You can modify this data using the <b>Edit</b> button. |
| <b>Add</b>              | Adds new message requests in the <b>Request</b> field.                                                                                           |
| <b>Edit</b>             | Modifies any existing data by updating mandatory query parameters in the <b>Query Parameters</b> field.                                          |
| <b>Delete</b>           | Removes any message request.                                                                                                                     |
| <b>Export</b>           | Exports existing records in the JSON format.                                                                                                     |
| <b>Clear</b>            | Refreshes the existing screen by removing the data.                                                                                              |

3. To configure Pod Overload Action Policy, in the left navigation pane, click the **Overload Action Policy** tab.
  - a. In the Overload Action Policy section, click **Get** to retrieve the scp-worker Pod Overload Action Policy data configured based on the threshold level.
  - b. To add a new request, click **Add** and enter the request body information in the **Request** field.
  - c. Click **Submit**.

The request body message appears in the **Response** field.



- d. To edit, export, delete, or clear the data, click the required buttons as described in [Table 4-46](#).
4. To configure Pod Overload Discard Policy, in the left navigation pane, click the **Overload Discard Policy** tab.
  - a. In the Overload Discard Policy section, click **Get** to retrieve the scp-worker Pod Overload Discard Policy data configured based on the threshold level.
  - b. To add a new request, click **Add** and enter the request body information in the **Request** field.
  - c. Click **Submit**.  
The request body message appears in the **Response** field.
  - d. To edit, export, delete, or clear the data, click the required buttons as described in [Table 4-46](#).


## 4.2.21 Configuring SBI Message Priority

Perform the following procedure to configure Service Based Interface (SBI) Message Priority parameters supported by the Pod Overload Control feature. You can retrieve SCP\_SBI Message Priority configured in SCP and modify the data. Also, add a new SBI message request.

For more information about SBI Message Priority parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

1. From the left navigation pane, navigate to **SCP** and click the **SBI Message Priority** tab.
2. In the **SBI Message Priority** section, click **Get** to retrieve the SCP\_SBI Message Priority configured in SCP.

**Figure 4-65 SBI Message Priority**

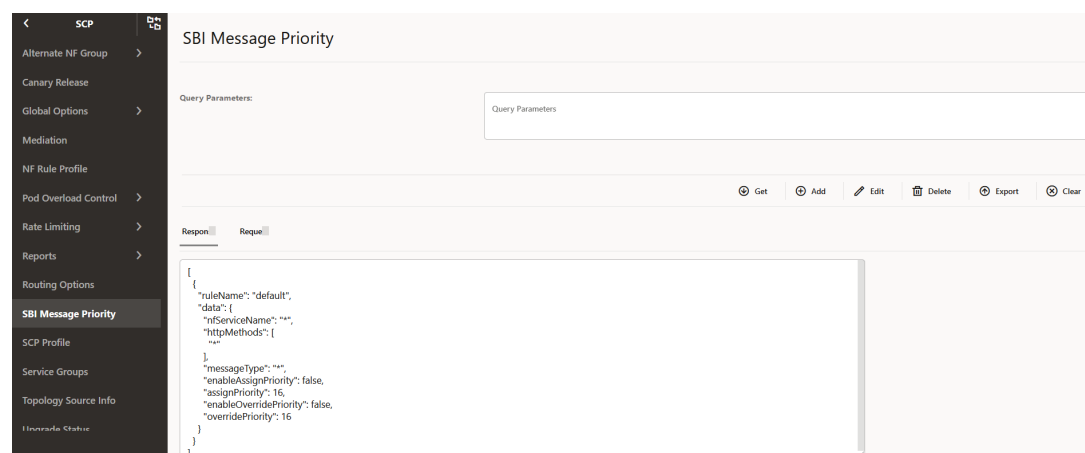

3. To add a new SBI message request, click **Add** and enter the request body information in the **Request** field.
4. Click **Submit**.  
The request body message appears in the **Response** field.
5. To edit, export, delete, or clear the data, click the required buttons as described in the following table:

**Table 4-47 Buttons and Field Descriptions of SBI Message Priority**

| Button and Field Names  | Description                                                                                                      |
|-------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Query Parameters</b> | Allows to enter parameters to retrieve, add, and update SBI message priority information.                        |
| <b>Get</b>              | Retrieves the SCP_SBI Message Priority configured in SCP. You can modify this data using the <b>Edit</b> button. |
| <b>Add</b>              | Adds new message requests in the <b>Request</b> field.                                                           |
| <b>Edit</b>             | Modifies any existing data by updating mandatory query parameters in the <b>Query Parameters</b> field.          |
| <b>Delete</b>           | Removes any message request.                                                                                     |
| <b>Export</b>           | Exports existing records in the JSON format.                                                                     |
| <b>Clear</b>            | Refreshes the existing screen by removing the data.                                                              |

## 4.2.22 Configuring DNS SRV based Alternate Routing

This section provides information to enable different options to use the Alternate Routing based on the DNS SRV Records feature.

You must log in to the CNC Console while performing the procedures described in the subsequent subsections. Using these procedures, you can perform the followings tasks:

- Set the routing mode.
- Configure the default Time To Live (TTL) value.
- Refresh the DNS SRV records in DB.
- Add and fetch DNS SRV records from DB.

### 4.2.22.1 Configuring Routing Modes

Perform the following procedure to enable alternate routing and set the routing mode to NF Set, DNS SRV, or both when the forward routing fails.

1. From the left navigation pane, navigate to **SCP** and click the **Routing Options** tab.  
The Routing Options screen appears with the list of services.
2. To set alternate route modes, in the **Actions** column, click the **Edit** icon for the corresponding service name.

### Figure 4-66 Setting Alternate Routing Mode

Mediation >  
NF Rule Profile  
Outlier Detection  
Pod Overload Control >  
Rate Limiting >  
Reports >  
Route Groups  
**Routing Options**  
SBI Message Priority  
SCP Features >  
SCP Profile  
SCP Service Configuration... >  
SEFP Info  
Service Groups  
Topology Source Info

## Edit Routing Options

Service Name  
nf-e2e-test-pocout

OO Enable: ☐

Rule Name  
nf-rule-001

Deployment Model  
Deployment Model  
SITE\_WIDE

Total Transaction Lifetime  
65

Response Timeout  
14

Remote Condition List

| Status Code | ⊗ Add                                                        |
|-------------|--------------------------------------------------------------|
| 307         | <input checked="" type="checkbox"/> <input type="checkbox"/> |
| 308         | <input checked="" type="checkbox"/> <input type="checkbox"/> |
| 429         | <input checked="" type="checkbox"/> <input type="checkbox"/> |
| 5xx         | <input checked="" type="checkbox"/> <input type="checkbox"/> |

Alternate Route

Model  
NF\_SET

Service Level Routing Options

Service Name

- In the **DNS SRV Based Alternate Route** section, set the **Mode** of the selected specific services as required:
  - NF\_SET**: SCP performs alternate routing based on the Model C Indirect 5G SBI Communication format. This is the default mode.
  - DNS\_SRV**: SCP performs alternate routing based on the DNS SRV query.
  - NF\_SET\_FOLLOWED\_BY\_DNSSRV**: SCP performs alternate routing based on NF Set and then with DNS SRV.
- Click **Save**.

#### 4.2.22.2 Configuring the Default TTL Value

Perform the following procedure to configure the default Time To Live (TTL) value.

1. From the left navigation pane, navigate to **SCP** and click the **Global Options** tab.
2. To configure the **TTL** value, click the **System Config** tab.
3. In the **System Config** section, click the **Edit** icon and set the **TTL** value as required.  
By default, this value is set to 900s. The range is from 30s to 86400s.

Figure 4-67 Setting TTL Value

Forward Nf Discovery Headers: ☒

TTL:

DnsQueryTimeout:

▼ Traffic Policy

▼ Connection Pool

▼ HTTP

Idle Timeout:

▼ HTTPS

Idle Timeout:

4. Click **Submit**.

### 4.2.22.3 Configuring Alternate NF Group

Perform the following procedure to add and fetch DNS SRV records from DB.

1. From the left navigation pane, navigate to **SCP** and click the **Alternate NF Group** tab.
2. To configure DNS records using query parameters, click the **Configuration** tab.
3. In the **Configuration** section, click **Add** to add query parameters in the **Request** field.

Figure 4-68 Alternate NF Group Options

Alternate NF Group

Configuration

Refresh DNS SRV Data

Query Parameters:

Get Add Delete Export Clear

4. Click **Submit**.  
Query parameters automatically appear in the **Response** field.
5. Click **Get** to view all the records of the query parameter in the **Response** field.
6. To export, delete, or clear the data, click the required buttons as described in the following table:

**Table 4-48 Configuration Query Parameters**

| Button and Field Names  | Description                                                                                                                                                                                                                 |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Query Parameters</b> | FQDN of an NF profile.<br>Example:<br>serviceProtoName=_http._tcp.pcf4svc.scpsvc.svc.cluster.local&apiPrefix=USEast                                                                                                         |
| <b>Get</b>              | Fetches DNS SRV records from DB.                                                                                                                                                                                            |
| <b>Add</b>              | Adds DNS SRV records to DB by querying the DNS server with the combination of apiPrefix and Service Proto Name.<br>Example:<br>{ "apiPrefix": "USEast", "serviceProtoName": "_http._tcp.pcf2svc.scpsvc.svc.cluster.local" } |
| <b>Delete</b>           | Removes a particular record from DB based on Service Proto Name (SPN).<br>Example:<br>serviceProtoName=_http._tcp.udm1svc.scpsvc.svc.cluster.local                                                                          |
| <b>Export</b>           | Exports DNS SRV records in the JSON format.                                                                                                                                                                                 |
| <b>Clear</b>            | Resets all the fields in the <b>Configuration</b> section.                                                                                                                                                                  |
| <b>Response</b>         | Displays the required DNS SRV records.                                                                                                                                                                                      |
| <b>Request</b>          | Allows you to add a query parameter when you click the <b>Add</b> button.                                                                                                                                                   |

- Click **Submit**.

#### 4.2.22.4 Configuring Refresh DNS SRV Data

Perform the following procedure to refresh the DNS SRV records in DB.

- From the left navigation pane, navigate to **SCP** and click the **Alternate NF Group** tab.
- To refresh DB records, click the **Refresh DNS SRV Data** tab in the left navigation pane.
- Click **Refresh**.
- In the **Request** field, enter one of the following parameters:

**Table 4-49 Request Parameters**

| Parameter                | Description                                                                                                                                                                                   |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| { "spnlist": [ ] }       | This parameter refreshes only specific records that are provided within []. For example:<br>{ "spnlist": [ "_http._tcp.pcf4svc.scpsvc.svc.cluster.local", "_http._tcp.nf1stub.scpsvc.svc" ] } |
| { "refreshAll": "true" } | This parameter refreshes all the records.                                                                                                                                                     |

- Click **Submit**.

## 4.2.23 Configuring SBI Message Priority and Error Profiles for Egress Congestion Control

Perform the following procedure to configure values for determining the priority of ingress messages and create error profiles.

1. From the left navigation pane, navigate to **SCP** and click the **Routing Options** tab.
2. In the Routing Options section, select a service name from the Service Name column and click the corresponding edit icon.
3. In the NFService Load Based Congestion Control section, in the **SBI Message Priority Discard From** field, enter a value to determine the priority of the ingress message.

### Note

- The value of the **SBI Message Priority Discard From** field is compared with the "3gpp-Sbi-Message-Priority" header to categorize an ingress message request as high or low priority. By default, SCP considers 24 as the priority for the ingress message request if the message does not have the "3gpp-Sbi-Message-Priority" header. If the priority of the ingress message request is less than the value of **SBI Message Priority Discard From**, then the message is considered as high priority message.
- SCP discards all the 5G SBI messages whose "3gpp-Sbi-Message-Priority" header value is equal to or greater than this configuration.

**Figure 4-69 Configuring SBI Message Priority and Error Profiles for Egress Congestion Control**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| SBI Message Priority Discard From:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SBI Message Priority Discard From<br>24 |
| <div> <div>▼ Error Profile Configuration</div> <div> <div>Error Code:</div> <div>Error Code<br/>503</div> </div> <div> <div>Error Cause:</div> <div>Error Cause<br/>NF_CONGESTION</div> </div> <div> <div>Error Title:</div> <div>Error Title<br/>NF service is overloaded/congested</div> </div> <div> <div>Retry After:</div> <div>Retry After<br/>5</div> </div> <div> <div>Redirect Url:</div> <div>Redirect Url</div> </div> <div> <div>Error Description:</div> <div>Error Description<br/>NF service is overloaded/congested</div> </div> </div> |                                         |

4. To configuring nextHopSCP and SEPP, see [Configuring the nextHopSCP Routing Option](#) section.

- To configure the error profiles, complete the following fields:

**Table 4-50 Error Profile Configuration**

| Field Name               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Error Code</b>        | Indicates configurable error codes to be sent by SCP to consumer NFs when the producer NF is congested or throttled in case of a low priority message.<br>The default value is 500, which indicates: Service Unavailable.                                                                                                                                                                                                                                                                                               |
| <b>Error Cause</b>       | Indicates the error cause that is specific to the occurrence of the problem.<br>The default value is NF_CONGESTION.                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Error Title</b>       | Indicates the title of the error type.<br>The default value is NF service is overloaded or congested.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Retry After</b>       | Indicates the time during which the service is unavailable. It is applicable when the error code is 503.<br>When the error code is 3xx, where x indicates any numeric value, it specifies the minimum time that the user must wait before issuing the redirected request.<br>The default value is 5. The unit of this value can be HTTP-date or delta-seconds. For example: <ul style="list-style-type: none"> <li>Fri, 31 Dec 2001 23:59:59 GMT</li> <li>120</li> </ul> In the latter example, the delay is 2 minutes. |
| <b>Redirect Url</b>      | Retries the request towards the directed resource referred in the Location header using the same request method.<br>Example:<br><br>https://udm1.udmsvc.domain/USEast/nudm-sdm/v1/path2                                                                                                                                                                                                                                                                                                                                 |
| <b>Error Description</b> | Indicates an explanation specific to the occurrence of the problem.<br>The default value is NF service is overloaded or congested.                                                                                                                                                                                                                                                                                                                                                                                      |

- Click **Save**.

## 4.2.24 Configuring the nextHopSCP Routing Option

Perform the following procedure to configure the nextHopSCP routing options.

- From the left navigation pane, navigate to **SCP** and click the **Routing Options** tab.  
The Routing Options screen appears with the list of services.
- To edit the Next Hop SCP section, click the **Edit** icon for the corresponding service name.
- Expand the **Next Hop SCP Routing Options** option.

Figure 4-70 NextHopSCP

Next Hop SCP Routing Options

Response Timeout: 4s

Total Transaction Lifetime: 7s

Service Level

Max Routing Attempts: 2

Service Endpoint Level

Max Routing Attempts: 1

NFService Load Based Congestion Control

Alternate Routing Onset Threshold Percent: 80

Alternate Routing Abatement Threshold Percent: 75

Throttle Onset Threshold Percent: 90

Throttle Abatement Threshold Percent: 85

Error Profile Configuration

Reroute On Response Code List:

Exceptions:

| Name    | Action      | Error Code | Error Response      |
|---------|-------------|------------|---------------------|
| No_Host | Send_Answer | 503        | Service Unavailable |

4. Configure the following fields as required:

Table 4-51 Configuring Next Hop SCP Routing Options

| Field Name                                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Response Timeout</b>                     | Indicates the allotted time to respond to a message request. When the response timeout expires, SCP performs alternate rerouting to the available alternate NF or pod.<br>If no alternate NFs or pods are available, SCP sends an error message.<br>The default value is 4 seconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Total Transaction lifetime</b>           | Indicates the total time allowed to forward a request, including initial and all subsequent routing attempts.<br><b>Note:</b> The total time consumed in processing all retries must not exceed the total transaction lifetime.<br>The default value is 7 seconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Max Routing Attempts (Service Level)</b> | Indicates the maximum number of forward routing attempts made at a service level. <ul style="list-style-type: none"> <li>Maximum number of times SCP is allowed to forward a request message. If the Max Routing attempts value is set to 1 for both service and pod level, the total transaction lifetime field value is not required. If the Max Routing attempts value is set to greater than 1 for both service and pod level, then the total transaction lifetime field value is considered for rerouting processing.</li> <li>Rerouting of request messages is always considered as Max Routing attempts value minus one (-1), that is, Rerouting of request messages = (Max Routing attempts value) -1</li> </ul> The default routing attempt is 2. |



**Table 4-51 (Cont.) Configuring Next Hop SCP Routing Options**

| Field Name                                                                                              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Max Routing Attempts</b><br>(Service Endpoint Level)                                                 | Indicates the maximum number of forward routing attempts at NF or pod level. <ul style="list-style-type: none"> <li>Maximum number of times SCP is allowed to forward a request message. If the Max Routing attempts value is set to 1 for both service and pod level, the total transaction lifetime field value is not required. If the Max Routing attempts value is set to greater than 1 for both service and pod level, then the total transaction lifetime field value is considered for rerouting processing.</li> <li>Rerouting of request messages is always considered as Max Routing attempts value minus one (-1), that is, Rerouting of request messages = (Max Routing attempts value) -1</li> </ul> The default routing attempt is 1. |
| <b>Alternate Routing Onset Threshold Percent</b><br>(NFService Load Based Congestion Control Level)     | Indicates the percentage of Alternate Routing Onset Threshold Percent.<br>The default value is 80%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Alternate Routing Abatement Threshold Percent</b><br>(NFService Load Based Congestion Control Level) | Indicates the percentage of Alternate Routing Abatement Threshold Percent.<br>The default value is 75%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Throttle Onset Threshold Percent</b><br>(NFService Load Based Congestion Control Level)              | Indicates the percentage of Throttle Onset Threshold Percent.<br>The default value is 90%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Throttle Abatement Threshold Percent</b><br>(NFService Load Based Congestion Control Level)          | Indicates the percentage of Throttle Abatement Threshold Percent.<br>The default value is 85%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

5. Click **Save**.

## 4.2.25 Configuring SEPP Inter PLMN Routing

Perform the following procedure to add an NF instance ID and configure Public Land Mobile Network (PLMN) IDs supported by Security Edge Protection Proxy (SEPP).

1. From the left navigation pane, navigate to **SCP** and click the **SEPP Info** tab.
2. To filter or add an NF instance ID in the SEPP Info section, click the required buttons as described in the following table:

**Table 4-52 Filtering and Adding NF Instance IDs**

| Button, Column, and Field Names | Description                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Type to Filter</b>           | This field allows you to search for an NF instance ID and displays it in the NF Instance ID column. |
| <b>Refresh</b>                  | This button refreshes information in the SEPP Info section.                                         |
| <b>Add</b>                      | This button allows you to add a new NF instance ID.                                                 |
| <b>NF Instance ID</b>           | This column displays the available NF instance IDs.                                                 |

**Table 4-52 (Cont.) Filtering and Adding NF Instance IDs**

| Button, Column, and Field Names | Description                                                                      |
|---------------------------------|----------------------------------------------------------------------------------|
| <b>Actions</b>                  | This column allows you to edit an existing NF instance ID using the edit option. |

3. To add a new NF instance ID, click **Add**.

**Figure 4-71 Adding a New NF Instance ID**

NF Instance ID:  Required

▼ SEPP Info

▼ SEPP Ports

Http:

Https:

Remote PLMN List:

| MCC | MNC |       |
|-----|-----|-------|
|     |     | ⊕ Add |

No data to display.

4. In the **NF Instance ID** field, enter an instance ID, for example, 8faf1bbc-6e4a-4454-a507-aef01a101a06.
5. Expand the **SEPP Info** option to configure SEPP ports as follows:
  - a. In the **Http** field, enter a value between 0 and 65535.  
This field is applicable for the HTTP connection.
  - b. In the **Https** field, enter a value between 0 and 65535.  
This field is applicable for the HTTPS connection.

**Note**

If both the fields are configured, then the HTTPS connection is preferred.

6. To configure PLMN IDs supported by SEPP, in the Remote PLMN List section, click **Add**.

**Figure 4-72 Supported PLMN by SEPP**

Add Remote PLMN List

MCC:

MCC

MNC:

MNC

Save

Cancel

- a. In the **MCC** field, enter the required mobile country code.  
Mobile Country Code (MCC) is a three digit number ranging from 0 to 9.
  - b. In the **MNC** field, enter the required mobile network code.  
Mobile Network Code (MNC) can be of two or three digits ranging from 0 to 9.
  - c. Click **Save**.
7. Click **Save**.

## 4.2.26 Configuring Route Groups

Perform the following procedure to configure Route Groups parameters.

1. From the left navigation pane, click the **SCP** tab, and then click the **Route Groups** tab.  
The Route Groups screen appears.

**Figure 4-73 Route Groups**

Route Groups

Query Parameters:

Query Parameters

Get

Add

Delete

Export

Clear

2. In the Route Groups section, click **Add** to add request body in the **Request** field.  
Query parameters are applicable only for DELETE and GET resource types.
3. Click **Submit**.  
Response body automatically appears in the **Response** field.

4. Click **Get** to view all the records of the response body in the **Response** field.
5. To export, delete, or clear the data, click the required buttons as described in the following table, and then click **Submit**.

Table 4-53 Route Groups Buttons and Field Descriptions

| Button and Field Name   | Description                                                                                                                    |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>Response</b>         | Displays the required Route Groups records.                                                                                    |
| <b>Request</b>          | Allows you to add a query parameter when you click the <b>Add</b> button.                                                      |
| <b>Query Parameters</b> | Processes routeGroupId, routeGroupType, or primaryRoute parameters.                                                            |
| <b>Get</b>              | Retrieves configured route groups based on the supplied query parameters as filtering criteria.                                |
| <b>Export</b>           | Exports Route Groups records in the JSON format.                                                                               |
| <b>Delete</b>           | Removes the configuration of an existing route group.                                                                          |
| <b>Clear</b>            | Resets all the fields in this screen.                                                                                          |
| <b>Add</b>              | Configures a new route group or replaces an existing route group by providing a route group configuration in the request body. |

## 4.2.27 Configuring Ingress Rate Limiter Consumer Info

Perform the following procedure to configure consumer information for ingress rate limiting.

1. From the left navigation pane, click the **SCP** tab, and then click the **Ingress Rate Limiter Consumer Info** tab.

The Ingress Rate Limiter Consumer Info screen appears:

Figure 4-74 Ingress Rate Limiter Consumer Info

The screenshot shows the 'Consumer Info Configuration' screen. The left sidebar has a dark theme with the following items: < SCP, Alternate NF Group, Canary Release, Consumer Info Configurati..., Global Options, Mediation, NF Rule Profile, Outlier Detection, Pod Overload Control, Rate Limiting, Reports, Route Groups, and Routing Options. The main content area has a light gray background and is titled 'Consumer Info Configuration'. It contains the following fields and values:

| Field                           | Value                                          |
|---------------------------------|------------------------------------------------|
| XFCC Certificate Extract Index: | XFCC Certificate Extract Index<br>0            |
| XFCC Extract Field:             | XFCC Extract Field<br>DNS                      |
| XFCC Extract Index:             | XFCC Extract Index<br>0                        |
| User Agent Format:              | User Agent Format                              |
| Primary Header Name:            | Primary Header Name<br>X-Forwarded-Client-Cert |
| User Agent Separator:           | User Agent Separator                           |
| Secondary Header Name:          | Secondary Header Name                          |

2. In the Ingress Rate Limiter Consumer Info section, click **Edit**, and then configure the fields as described in the following table:

Table 4-54 Configuring Consumer Information

| Field Name                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>XFCC Certificate Extract Index</b> | <p>The certificate extract index contains certificate information in the XFCC header.</p> <p>This parameter is used to decode "X-Forwarded-Client-Cert" for the FQDN.</p> <p>The default value is 0.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>XFCC Extract Field</b>             | <p>This is the name of the field that has to be retrieved from the XFCC header.</p> <p>The default value is DNS.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>XFCC Extract Index</b>             | <p>Index where the field configured in 'extractField' is present in the XFCC header for extraction.</p> <p>The default value is 0.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>User Agent Format</b>              | <p>The header format to identify the consumer NF according to the ingress rate limiting configurations.</p> <p>It supports the following formats:</p> <ul style="list-style-type: none"> <li>• Format1: NFTYPE-NFINSTANCEID FQDN or NFTYPE-NFINSTANCEID-FQDN</li> <li>• Format2: NFTYPE-FQDN NFINSTANCEID or NFTYPE-FQDN-NFINSTANCEID</li> <li>• Format3: NFTYPE-NFINSTANCEID</li> <li>• Format4: NFTYPE-FQDN</li> </ul> <p>Where,</p> <ul style="list-style-type: none"> <li>• NFTYPE indicates the type of consumer NF.</li> <li>• NFINSTANCEID indicates the instance ID of the consumer NF.</li> <li>• FQDN indicates the FQDN of the consumer NF.</li> </ul> <p>In the aforementioned example, "-" is a separator and NFInstanceId, FQDN, and Hostname are supported IDs.</p> |
| <b>Primary Header Name</b>            | <p>The header name to identify the consumer NF according to the ingress rate limiting configurations.</p> <p>This is a mandatory parameter. This parameter is given priority over the secondaryHeaderName parameter.</p> <p>The default value is "X-Forwarded-Client-Cert".</p> <p>It can use the following values:</p> <ul style="list-style-type: none"> <li>• "User-Agent"</li> <li>• "X-Forwarded-Client-Cert"</li> </ul>                                                                                                                                                                                                                                                                                                                                                      |
| <b>User Agent Separator</b>           | <p>This is the separator that the User-Agent header uses to separate NFINSTANCEID and FQDN.</p> <p>The default value is "SPACE".</p> <p>It can use the following values:</p> <ul style="list-style-type: none"> <li>• "SPACE"</li> <li>• "HYPHEN"</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Secondary Header Name</b>          | <p>The header name to identify the consumer NF according to the ingress rate limiting configurations.</p> <p>This is an optional parameter.</p> <p>The default value is "".</p> <p>It can use the following values:</p> <ul style="list-style-type: none"> <li>• "User-Agent"</li> <li>• "X-Forwarded-Client-Cert"</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

3. Click **Save**.

## 4.2.28 Configuring SCP Services

Perform the following procedure to view thread watchdog and queue alerts threshold configurations required for SCP microservices.

1. From the left navigation pane, click the SCP tab, and then click the SCP Service Configuration tab.
2. In the left navigation pane, click the SCPC-AlternateResolution tab and do the following:
  - a. In the SCPC-AlternateResolution Service Configuration section, expand the SCP Service Configuration option.
  - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
  - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
3. In the left navigation pane, click the SCPC-Audit tab and do the following:
  - a. In the SCPC-Audit Service Configuration section, expand the SCP Service Configuration option.
  - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
  - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
4. In the left navigation pane, click the SCPC-Configuration tab and do the following:
  - a. In the SCPC-Configuration Service Configuration section, expand the SCP Service Configuration option.
  - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
  - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
5. In the left navigation pane, click the SCPC-Configuration tab and do the following:
  - a. In the SCPC-Configuration Service Configuration section, expand the SCP Service Configuration option.
  - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
  - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
6. In the left navigation pane, click the SCPC-Notification tab and do the following:
  - a. In the SCPC-Notification Service Configuration section, expand the SCP Service Configuration option.
  - b. To view the threshold values of different queues, expand the Queue Utilization Alert Thresholds option.

The SCPC-Notification Service Configuration screen displays the queue values for critical, major, and minor threshold.

**Figure 4-75 SCPC-Notification Service Configuration**

| Queue Name        | Critical Queue Threshold | Major Queue Threshold | Minor Queue Threshold |                      |
|-------------------|--------------------------|-----------------------|-----------------------|----------------------|
| notificationQueue | 86%                      | 76%                   | 66%                   | <a href="#">View</a> |
| waitingQueue      | 85%                      | 75%                   | 65%                   | <a href="#">View</a> |
| runQueue          | 85%                      | 75%                   | 65%                   | <a href="#">View</a> |

The following table describes the significance of each column to determine the values of critical, major, and minor threshold.

**Note**

The critical, major, and minor threshold values are automatically populated in the CNC Console and cannot be modified. These values are configured using REST APIs as described in "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

**Table 4-55 Queue Utilization Alert Thresholds**

| Column Name                     | Description                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Queue Name</b>               | Indicates the name of the queue for which these configurations are applicable.                                 |
| <b>Critical Queue Threshold</b> | Indicates the percentage (%) value for queue usage threshold upon reaching which a "critical" alert is raised. |
| <b>Major Queue Threshold</b>    | Indicates the percentage (%) value for queue usage threshold upon reaching which a "major" alert is raised.    |
| <b>Minor Queue Threshold</b>    | Indicates the percentage (%) value for queue usage threshold upon reaching which a "minor" alert is raised.    |

7. In the left navigation pane, click the SCPC-Subscription tab and do the following:
  - a. In the SCPC-Subscription Service Configuration section, expand the SCP Service Configuration option.
  - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
  - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
8. In the left navigation pane, click the SCP-NrfProxy tab and do the following:
  - a. In the SCP-NrfProxy Service Configuration section, expand the SCP Service Configuration option.

- b. To view the threshold values of different queues, expand the Queue Utilization Alert Thresholds option.

The SCP-NrfProxy Service Configuration screen displays the queue values for critical, major, and minor threshold.

**Figure 4-76 SCP-NrfProxy Service Configuration**

| Queue Name                 | Critical Queue Threshold | Major Queue Threshold | Minor Queue Threshold |                      |
|----------------------------|--------------------------|-----------------------|-----------------------|----------------------|
| scpDownstreamExecutorQueue | 85%                      | 75%                   | 65%                   | <a href="#">View</a> |
| scpUpstreamExecutorQueue   | 85%                      | 75%                   | 65%                   | <a href="#">View</a> |

The queue utilization alerts threshold values are automatically populated in the CNC Console as described in [Table 4-55](#).

- c. Expand the Thread Watchdog Configuration option to view the values of thread watchdog configurations:

The following table describes the fields required to configure the Thread Watchdog feature:

**Note**

Thread watchdog field values are automatically populated in the CNC Console and cannot be modified. These values are configured using REST APIs as described in "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

**Table 4-56 Thread Watchdog Configuration**

| Field Name                          | Description                                                                                                                                                                                                                                                                                    |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Enable Thread Watchdog</b>       | Specifies whether to enable or disable liveness failures. If this parameter is set to <code>true</code> , liveness fails whenever the watchdog reports a stuck or deadlocked thread.                                                                                                           |
| <b>Watchdog Monitoring Interval</b> | Indicates the time interval used by the watchdog to monitor if any threads are stuck.                                                                                                                                                                                                          |
| <b>Watchdog Interval</b>            | Indicates the maximum time allowed for threads to be nonresponsive. Watchdog uses this time to determine if a thread is stuck.<br>For example, if this value is set to 10 seconds and a thread does not respond for 10 seconds, then the watchdog marks that thread as stuck or nonresponsive. |
| <b>Watchdog Failure Count</b>       | Indicates the maximum number of times thread watchdog attempts to check if a thread is stuck before marking the thread as hung or stuck.<br>For example, if this value is set to 3, then the watchdog checks if a thread is stuck 3 times continuously before marking it as stuck or hung.     |



9. In the left navigation pane, click the SCP-Worker tab and do the following:
  - a. In the SCP-Worker Service Configuration section, expand the SCP Service Configuration option.
  - b. To view the threshold values of different queues, expand the Queue Utilization Alert Thresholds option.

The SCP-Worker Service Configuration screen displays the queue values for critical, major, and minor threshold.

**Figure 4-77 SCP-Worker Service Configuration**

| SCP-Worker Service Configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                       |                       | Refresh              |            |                          |                       |                       |  |                            |     |     |     |                      |                                    |     |     |     |                      |                          |     |     |     |                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------|-----------------------|----------------------|------------|--------------------------|-----------------------|-----------------------|--|----------------------------|-----|-----|-----|----------------------|------------------------------------|-----|-----|-----|----------------------|--------------------------|-----|-----|-----|----------------------|
| <div> <div>SCP Service Configuration</div> <div> <div>Queue Utilization Alert Thresholds</div> <div>Value:</div> <table> <tr> <th>Queue Name</th><th>Critical Queue Threshold</th><th>Major Queue Threshold</th><th>Minor Queue Threshold</th><th></th></tr> <tr> <td>scpDownstreamExecutorQueue</td><td>85%</td><td>75%</td><td>65%</td><td><a href="#">View</a></td></tr> <tr> <td>scpNrfProxyDownstreamExecutorQueue</td><td>85%</td><td>75%</td><td>65%</td><td><a href="#">View</a></td></tr> <tr> <td>scpUpstreamExecutorQueue</td><td>85%</td><td>75%</td><td>65%</td><td><a href="#">View</a></td></tr> </table> </div> </div> |                          |                       |                       |                      | Queue Name | Critical Queue Threshold | Major Queue Threshold | Minor Queue Threshold |  | scpDownstreamExecutorQueue | 85% | 75% | 65% | <a href="#">View</a> | scpNrfProxyDownstreamExecutorQueue | 85% | 75% | 65% | <a href="#">View</a> | scpUpstreamExecutorQueue | 85% | 75% | 65% | <a href="#">View</a> |
| Queue Name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Critical Queue Threshold | Major Queue Threshold | Minor Queue Threshold |                      |            |                          |                       |                       |  |                            |     |     |     |                      |                                    |     |     |     |                      |                          |     |     |     |                      |
| scpDownstreamExecutorQueue                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 85%                      | 75%                   | 65%                   | <a href="#">View</a> |            |                          |                       |                       |  |                            |     |     |     |                      |                                    |     |     |     |                      |                          |     |     |     |                      |
| scpNrfProxyDownstreamExecutorQueue                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 85%                      | 75%                   | 65%                   | <a href="#">View</a> |            |                          |                       |                       |  |                            |     |     |     |                      |                                    |     |     |     |                      |                          |     |     |     |                      |
| scpUpstreamExecutorQueue                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 85%                      | 75%                   | 65%                   | <a href="#">View</a> |            |                          |                       |                       |  |                            |     |     |     |                      |                                    |     |     |     |                      |                          |     |     |     |                      |

The queue utilization alerts threshold values are automatically populated in the CNC Console as described in [Table 4-55](#).

- c. Expand the Thread Watchdog Configuration option to view the values of thread watchdog configurations that are automatically populated in the CNC Console as described in [Table 4-56](#).

## 4.2.29 Configuring Outlier Detection

Perform the following procedure to add, edit, or remove any existing rule name for outlier detection.

1. From the left navigation pane, click the SCP tab, and then click the Outlier Detection tab.  
The Outlier Detection screen appears.

**Figure 4-78 Outlier Detection**

| Outlier Detection                                                                                                 |                           |
|-------------------------------------------------------------------------------------------------------------------|---------------------------|
| <div> <input type="text" value="Type to Filter"/> <span>✕</span> <span>↻ Refresh</span> <span>⊕ Add</span> </div> |                           |
| Rule Name ↕                                                                                                       | Actions                   |
| defaultRule                                                                                                       | <div>✎</div> <div>🗑</div> |
| nextHopScpODRule                                                                                                  | <div>✎</div> <div>🗑</div> |

2. If you want to edit or remove any existing rule name from the Rule Name column, click **Edit** or **Delete** icon in the Actions column.
3. To add new rule names, click **Add**.
4. In the Add Outlier Detection section, configure the following fields:
  - **Rule Name:** Enter a unique rule name that is available in the outlier detection table.
  - **Consecutive Errors:** Enter a value between from 5 to 500 to define the number of consecutive errors after which an endpoint is considered unhealthy.
  - **Interval:** Enter a value from 30 seconds to 86400 seconds to set the interval after which stale records are removed from the outlier data cache.
  - **Base Ejection Time:** Enter a value between 1 second and 500 seconds to set the of duration endpoint ejection.
  - **Error List:** Select the required error name from the available error list to be considered for outlier detection.
5. Click **Save**.

## 4.2.30 Configuring Traffic Feed

Perform the following procedure to configure OCNADD and Trigger Points.

1. From the left navigation pane, click the SCP tab, and then click the Traffic Feed tab.
2. To configure OCNADD fields, in the left navigation pane, click the Data Director tab.
3. In the Traffic Feed Data Director Configuration section, click **Edit** and configure the fields as described in the "Configuring Traffic Feed Data Director" section of the *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
4. To configure Trigger Points, in the left navigation pane, click the Trigger Points tab.
5. In the Trigger Points section, click **Add** and configure the fields as described in the "Configuring Traffic Feed Trigger Point Config" section of the *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
6. Click **Save**.

## 4.2.31 Congestion Control Configurations

Perform the following steps to configure congestion control parameters:

1. From the left navigation menu, navigate to **SCP** and then select **Congestion Control**.

- Click **Edit** icon from the **Actions** column for the required service that must be modified.

**Note**

The default rule name cannot be deleted. The new rule name can be added, modified, or deleted.

The **Edit Congestion Control** screen appears.

**Figure 4-79 Congestion Control**

- Make the required modifications for the following parameters:
  - Alternate Routing Onset Threshold Percent:** Set the threshold percentage for onset alternate routing.
  - Alternate Routing Abatement Threshold Percent:** Set the threshold percentage for alternate routing abatement.
  - Throttle Onset Threshold Percent:** Set the threshold percentage for onset throttling.
  - Throttle Abatement Threshold Percent:** Set the threshold percentage for throttle abatement.
  - SBI Msg Priority Discard From:** Set the priority for message, after which the messages can be discarded. For example, if the value is 30, then messages with priority 0-29 are high priority, and other low-priority messages will be throttled.

**Note**

All the parameters are mandatory.

For more information about the configuration parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- Click **Save**.
- Click **Cancel** to reset all the fields.
- Click **Delete** from the **Actions** column to delete the record.

## 4.2.32 Configuring Routing Options

Perform the following procedure to configure routing options.

1. From the left navigation menu, navigate to **SCP**, and then click the **Routing Options** tab.
2. From the left navigation menu, click the **Routing Options Config** tab.
3. In the **Routing Options Config** section, perform one of the following steps:
  - To configure a new routing option, click **Add** and configure the following fields:

**Table 4-57** Field Name

| Field Name                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Config Name</b>               | Unique configuration name to identify the records.<br>Number of characters is 256. Allowed character combinations should be alpha-numeric, hyphen, and underscore.                                                                                                                                                                                                                                                                                                                                            |
| <b>Message Type</b>              | List of types of messages, such as notifications and SBI-messages, for which the routing configurations will apply.                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Notification Type</b>         | Indicates the notification type.                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>NF Type</b>                   | The NF type of the producer NF or server for which routing options are configured. This is either 3GPP defined NFType as per TS 29.510 or custom NFType.                                                                                                                                                                                                                                                                                                                                                      |
| <b>NF Service Name</b>           | The NF service name of producer NF or server for which routing options are configured.<br>This is either 3GPP defined serviceName as per TS29.510 or any custom service name.                                                                                                                                                                                                                                                                                                                                 |
| <b>Method</b>                    | Indicates the method type. If no value is provided, '*' is configured in this field. This indicates that SCP-Worker will match any method type from following list: <ul style="list-style-type: none"> <li>– GET</li> <li>– PUT</li> <li>– POST</li> <li>– PATCH</li> <li>– OPTIONS</li> <li>– TRACE</li> <li>– HEAD</li> <li>– CONNECT</li> <li>– DELETE</li> </ul> <b>Note:</b> Both <b>Method</b> and <b>API Specific Resource Uri</b> should be configured for service operation specific configurations. |
| <b>API Specific Resource Uri</b> | REGEX expression which is used to validate resource URI in the RX request.<br><b>Note:</b> Both <b>Method</b> and <b>API Specific Resource Uri</b> should be configured for service operation specific configurations.                                                                                                                                                                                                                                                                                        |
| <b>Sender NFType</b>             | Configures consumer NFType, for example, client or sender. It decides routing options based on the consumer NFType that sends the message to SCP for routing.<br>In the current implementation, this field supports "*" as value, which means match all.                                                                                                                                                                                                                                                      |
| <b>Routing Config Set Name</b>   | Name of the Routing Config set record. For more information, see "Configuring Routing Options Config" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i> .                                                                                                                                                                                                                                                                                               |

Table 4-57 (Cont.) Field Name

| Field Name                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Service Operation</b>   | <p>Indicates the service operation type.</p> <p>The value of this field is compared with the second part of the callback type values in the 3gpp-Sbi-Callback header when the NF service sends a notification message.</p> <p>For example, when nudm-uecm sends DeregistrationNotification, then callback type value in the 3gpp-Sbi-Callback header will have Nudm_UECM_DeregistrationNotification, where DeregistrationNotification is callback service operation.</p> <p>If this parameter is not configured, only values that match the range regular expression are permitted.</p> |
| <b>API Name Ax Heading</b> | <p>Indicates the service type of the consumer NF.</p> <p>The value of this field is the first part of the callback type values in the 3gpp-Sbi-Callback header in a notification message.</p> <p>For example, when nudm-uecm sends DeregistrationNotification, then callback type value in 3gpp-Sbi-Callback header will have Nudm_UECM_DeregistrationNotification. Where Nudm_UECM is the apiNameAxHeading and DeregistrationNotification is callback service operation.</p>                                                                                                           |
| <b>Created Timestamp</b>   | Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Updated Timestamp</b>   | Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

For more information about the above mentioned fields, see "Configuring Routing Options Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To edit or remove any existing routing option configurations, select an existing routing options instance from the **Config Name** column, and click the corresponding **Edit** or **Delete** icon.
- Click **Save**.
  - To retrieve the query parameters, from the left navigation pane, click the **Routing Options Config Query** tab.
  - In the **Query Parameters** field, enter the query parameter, such as nftype=UDM, and click **Get**.  
Response and request configuration information appears in **Response** and **Request** fields.

## 4.2.33 Configuring Routing Config Set

Perform the following procedure to define routing options fields. These fields are mapped with service operation related fields as described in [Configuring Routing Options](#). These routing options fields are applied to a certain message routing when matched with service operation fields.

- From the left navigation menu, navigate to **SCP**, and then click the **Routing Options** tab.
- From the left navigation menu, click the **Routing Config Set** tab.
- In the Routing Config Set section, click **Edit** from the Actions column for the required service that must be modified.

4. Enter or modify the required values as described in "Configuring Routing Config Set" and "Configuring Routing Options Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
5. In the Reroute Condition List, configure the list of error codes for rerouting:
  - Click **Add** to add new status code.
  - Click **Edit** or **Delete** icon to edit or remove any existing error code from the reroute condition list.
6. Click **Save**.
7. Click **Cancel** to reset all the fields.

## 4.2.34 Configuring NFTypes-NFServices

Perform the following procedure to configure any new 3GPP defined NFs, custom NF types, and custom NF services in SCP.

1. From the left navigation pane, click the **SCP** tab, and then click the **NFTypes-NFServices** tab.
2. From the left navigation pane, click the **NFTypes-NFServices Config** tab.
3. In the **NF Service Data** section, do one of the following:
  - To add any new NF type or NF service, click **Add** and configure the following fields:

**Table 4-58 Field Name**

| Field Name             | Description                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Config Name</b>     | Indicates the name of the new configuration that fetches configuration information for the newly added NF service.                                                                                                                                     |
| <b>NF Type</b>         | Indicates the name of the new NF type for which routing options are configured. This is either 3GPP defined NF type as per TS 29.510 or custom NF type.                                                                                                |
| <b>NF Service Name</b> | Indicates the name of the new NF service for which routing options are configured. This is either 3GPP defined serviceName as per TS29.510 or any custom service name.                                                                                 |
| <b>API Name</b>        | Indicates the unique API name across all records.<br>In the absence of <b>API Name</b> , its value is automatically configured as <b>NF Service Name</b> . This must be configured if <b>API Name</b> and <b>NF Service Name</b> values are different. |
| <b>Service Type</b>    | Indicates the service type. When this field is blank, service type is automatically configured for both NOTIFICATION-MESSAGE-SERVICE and REQUEST-MESSAGE-SERVICE.                                                                                      |

Table 4-58 (Cont.) Field Name

| Field Name                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>API Name Ax Heading</b> | <p>Configures the <b>API Name Ax Heading</b> field of <a href="#">Configuring Routing Options</a>. The value of this field is the first part of the callback type values in the 3gpp-Sbi-Callback header in a notification message.</p> <p>For example, when nudm-uecm sends DeregistrationNotification, then callback type value in 3gpp-Sbi-Callback header will have Nudm_UECM_DeregistrationNotification. Where Nudm_UECM is the apiNameAxHeading and DeregistrationNotification is callback service operation.</p> <p>Validations:</p> <ul style="list-style-type: none"> <li>– Empty and null values are allowed.</li> <li>– Default entries are populated for all supported 3GPP NFTypes.</li> <li>– If the value of this parameter is not provided, the API attempts to populate it from a static YAML file, provided that apiName is configured.</li> <li>– API allows the configuration of this parameter even when serviceName is set to noservice.</li> <li>– The API returns 400 responses if the following values are configured: <ul style="list-style-type: none"> <li>* a duplicate value that is already configured in SCP for a different NFType-NFService.</li> <li>* a reserved value for a different 3GPP NF irrespective of whether the specified NF is supported by SCP or is currently registered using the NFType-NFService REST API. The reserved value for NFs is taken from the static YAML file.</li> <li>* a value not aligned to the allowed regex of alpha-numeric, hyphen, and underscore characters.</li> <li>* a value for SCP and SEPP NFs.</li> </ul> </li> </ul> |
| <b>Created Timestamp</b>   | Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Updated Timestamp</b>   | Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

For more information about the above mentioned fields, see "Configuring NFTypes-NFServices" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To edit or remove any existing NF service data, select an NF type or NF service from the Config Name column, and click the corresponding **Edit** or **Delete** icon.
4. Click **Save**.
  5. To retrieve the query parameters, from the left navigation pane, click the **NFTypes-NFServices Config Query** tab.
  6. In the **Query Parameters** field, enter the query parameter, such as nftype=UDM, and click **Get**.

Response and request configuration information appears in **Response** and **Request** fields.

## 4.2.35 Configuring NF Service Feature Config

Perform the following procedure to configure NF service level features.

1. From the left navigation pane, click the SCP tab, and then click the NF Service Features tab.

2. From the left navigation pane, click the NF Service Config tab.
3. In the NF Service Config section, do one of the following:
  - To add any new NF service, click **Add** and configure the following fields:

Table 4-59 Field Name

| Field Name                        | Description                                                                                                                                                                                                                                                                                                             |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Config Name</b>                | Unique configName key to identify the record.<br>Number of characters is 256. Allowed character combinations should be alphanumeric, hyphen, and underscore.                                                                                                                                                            |
| <b>NF Type</b>                    | The NF type for which routing options are configured. This is either 3GPP defined NFType as per TS 29.510 or custom NFType.<br>The '*' value is accepted to indicate any match.                                                                                                                                         |
| <b>NF Service Name</b>            | The NF service name for which routing options are configured.<br>This is either 3GPP defined serviceName as per TS29.510 or any custom service name.<br><br>If a particular NFType does not have NF Service, the '*' keyword should be provided for this field.<br><br>The '*' value is accepted to indicate any match. |
| <b>NF Service Config Set Name</b> | Indicates available config name records. For more information, see the nfServiceConfigSetName parameter in "Configuring NF Service Feature Config" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i> .                                                            |
| <b>Created Timestamp</b>          | Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.                                                                                                                                                                                                  |
| <b>Updated Timestamp</b>          | Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.                                                                                                                                                                                                  |

For more information about the above mentioned fields, see "Configuring NF Service Feature Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To edit or remove any existing NF service, select an NF service from the Config Name column, and click the corresponding **Edit** or **Delete** icon.
4. Click **Save**.
  5. To retrieve the query parameters, from the left navigation pane, click the NF Service Config Query tab.
  6. In the **Query Parameters** field, enter the query parameter, such as nftype=UDM, and click **Get**.  
  
Response and request configuration information appears in **Response** and **Request** fields.

## 4.2.36 Configuring NF Service Feature Config Set

Perform the following procedure to configure service level features. This configuration is mapped with **NF Type** and **NF Service Name** combination as described in [Configuring NF Service Feature Config](#).

1. From the left navigation menu, navigate to **SCP**, and then click the NF Service Features tab.
2. From the left navigation menu, click the NF Service Config Set tab.



3. In the NF Service Config Set section, do one of the following:
  - Click **Add** to configure a new service level feature.
  - Select a service type from the Config Name column and click the corresponding **Edit** icon to modified the existing configuration.

Enter or modify the required values for the fields as described in "Configuring NF Service Feature Config Set" and "Configuring NF Service Feature Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

4. Click **Save**.

## 4.2.37 Circuit Breaking Configurations

Perform the following procedure to configure circuit breaking data.

1. From the left navigation menu, navigate to **SCP**, and then click the **Circuit Breaking** tab.
2. In the Circuit Breaking section, click **Edit** icon from the Actions column for the required service that must be modified.  
The Edit Circuit Breaking screen appears.

**Figure 4-80 Edit Circuit Breaking**

3. In the **HTTP2 Max Requests** field, set the maximum number of requests SCP routes to an NF service instance (peer destination) and waiting for their responses before stopping further routing requests to it. The maximum allowed value is 1000.
4. Enter or modify the required values as described in "Circuit Breaking Configurations" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
5. Click **Save**.
6. Click **Cancel** to reset the field.

## 4.2.38 Viewing SCP Feature Status

Perform the following procedure to fetch the runtime status of NRF migration task.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Feature Status** tab.
2. On the SCP Feature Status page, the following columns display the SCP feature status.


Table 4-60 SCP Feature Status

| Column Name               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Feature Name</b>       | Displays the names of the features, such as <code>nrf_bootstrap_info</code> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Admin State</b>        | Displays the admin state of the feature. Possible statuses are mentioned below: <ul style="list-style-type: none"> <li>• <b>ENABLED</b>: This indicates that the user has enabled the feature.</li> <li>• <b>DISABLED</b>: This indicates that the user has disabled the feature.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Runtime Status</b>     | Displays the current runtime status of the feature. Possible statuses are mentioned below: <ul style="list-style-type: none"> <li>• <b>DISABLED</b>: This indicates that the feature is disabled.<br/>For example, in the <code>nrf_bootstrap_info</code> feature, this state means SCP is running with a statically configured NRF. If the user has changed the 'Admin State' from <b>ENABLED</b> to <b>DISABLED</b>, this state means the feature is successfully disabled.</li> <li>• <b>IN_PROGRESS</b>: This indicates the enabling or disabling of the feature is currently in progress when the 'Admin State' is set to <b>ENABLED</b> or <b>DISABLED</b>.<br/>For example, in the <code>nrf_bootstrap_info</code> feature, when the 'Admin State' is <b>ENABLED</b>, the migration from static to DNS SRV based NRF topology is in progress. In the <code>nrf_bootstrap_info</code> feature, when the 'Admin State' is <b>DISABLED</b>, the migration from a DNS SRV based NRF topology to static NRF topology is in progress.</li> <li>• <b>FAILED_RETRY</b>: This indicates that the process of enabling or disabling the feature (as indicated by the 'Admin State') has encountered failure and is undergoing retries.<br/>For example, in the <code>nrf_bootstrap_info</code> feature, this state means either of the migration tasks has failed and going through retries.</li> <li>• <b>ENABLED</b>: This indicates the feature is successfully enabled.<br/>For example, in the <code>nrf_bootstrap_info</code> feature, this state means the migration from static to a DNS SRV based NRF topology is successful.</li> </ul> |
| <b>Creation Timestamp</b> | Displays the time of creation of the event, for example, <code>creationTimestamp</code> :<br>"2021-05-26T01:17:15.000+00:00"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Update Timestamp</b>   | Displays the time of updation of the event, for example, <code>creationTimestamp</code> :<br>"2021-05-26T06:24:15.000+00:00"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

## 4.2.39 Get NF Discovery Response Cache Configuration Data

Perform the following procedure to get the delegated discovery response caching configuration data using Cloud Native Configuration Console (CNC Console).

1. Log in to the CNC Console using your login credentials as described in *Oracle Communications Cloud Native Core, Service Communication Proxy User Guide*.
2. On the CNC Console Home page, in the upper pane, select the required SCP instance from the **Please Select Instance** drop-down list.
3. From the left navigation pane, click the **SCP** tab, and then click the **NF Discovery Response Cache Configuration** tab. The SCP Features section displays the list of two subtabs to be configured using the CNC Console:
  - a. NF Discovery Response Cache Configuration
  - b. NF Discovery Response Cache Configuration Data
4. In the **NF Discovery Response Cache Configuration Data** subtab, click **Get** to retrieve NF discovery cache configuration data based on the query parameters.

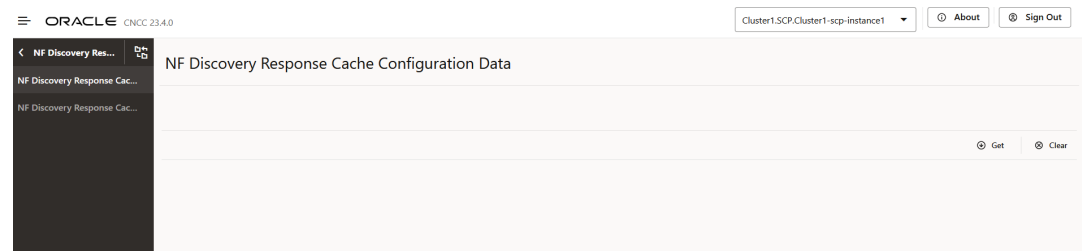**Figure 4-81 NF Discovery Response Cache Configuration Data****Table 4-61 Button and Field Description**

| Button and Field Names | Description                                                                                               |
|------------------------|-----------------------------------------------------------------------------------------------------------|
| Get                    | Retrieves NF discovery response cache configuration data. You can modify this data using the Edit button. |
| Clear                  | Refreshes the existing screen by removing the data.                                                       |

## 4.2.40 Configuring NF Profile Level Attribute

Perform the following procedure to configure NF profile level attributes for a specific NfType. These configuration are used in notification alternative requests.

1. From the left navigation pane, click the **SCP** tab, and then click the **NF Profile Level Attribute** tab.
2. From the left navigation pane, click the **NF Profile Level Attribute Configuration** tab.
3. To modify an existing configuration, select the configuration name from the **Config Name** column and click one of the following options for the corresponding configuration name:
  - **Edit**: Opens the Edit NF Profile Level Attribute Configuration Data dialog box to make modifications to the existing values of the fields. If you want to save your changes, click **Save**.
  - **Delete**: Removes the existing configuration from the **Config Name** list.
4. In the NF Profile Level Attribute Configuration section, click **Add** to add new DNS SRV and notification attributes.
5. In the Add NF Profile Level Attribute Configuration section, configure the following fields:

**Table 4-62 Field Name**

| Field Name         | Description                                                                                                                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Config Name</b> | Indicates unique configuration name to configure the NF profile level attribute configuration.<br>The allowed values must be alphanumeric with hyphen and underscore special characters.<br>Example: defaultNfProfileLevelAttrConfig |
| <b>NF Type</b>     | Describes NfType to which this configuration is applicable.<br>Default value: *<br>* indicates all valid NF types.                                                                                                                   |

Table 4-62 (Cont.) Field Name

| Field Name                                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Nf Instance Ids List</b>                   | <p>Indicates configuration list of nfInstance IDs separated by comma.</p> <p>When nfInstaceld is provided, it is used with nfType to extract the missing profile level data to be used while processing NF profiles for creating rules.</p> <p>When nfInstanceID is not provided, it is automatically set to '*'. Then, this configuration is applicable for any NF instance of a given NFType.</p> <p>The allowed values must be alphanumeric with hyphen and underscore special characters.</p> <p>Default value: *</p> <p>* indicates all valid NF instance IDs.</p> |
| <b>NF Profile Level Attr Config Data Name</b> | <p>Indicates an NF profile level attribute configuration data item that is already configured.</p> <p>When SCP processes NF profiles, relevant NF profile level attribute configuration data items are selected based on nfType or nfInstanceID combinations, and they are used for creating default rules. Then, those default rules will be used for routing and alternate routing of notification requests when the service name is unknown.</p> <p>Default value: defaultNfProfileLevelAttrConfigData</p>                                                           |
| <b>Save</b>                                   | Saves the configured values of all the fields.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Cancel</b>                                 | Exits from the current configuration page.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## 4.2.41 Configuring NF Profile Level Attribute Configuration Data

Perform the following procedure to configure NF profile level attribute configurations data. These configurations are used in notification alternative requests when NF profile data is unavailable.

1. From the left navigation pane, click the **SCP** tab, and then click the **NF Profile Level Attribute** tab.
2. From the left navigation pane, click the **NF Profile Level Attribute Configuration Data** tab.
3. To modify an existing configuration, select the configuration name from the **Config Name** column and click one of the following options for the corresponding configuration name:
  - **Edit**: Opens the Edit NF Profile Level Attribute Configuration Data dialog box to make modifications to the existing values of the fields. If you want to save your changes, click **Save**.
  - **Delete**: Removes the existing configuration from the **Config Name** list.
4. In the NF Profile Level Attribute Configuration Data section, click **Add** to add new DNS SRV and notification attributes.
5. In the Add NF Profile Level Attribute Configuration Data section, configure the following fields:

Table 4-63 Field Name

| Field Name                     | Description                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Config Name</b>             | Indicates unique configuration name to configure the NF profile level attribute configuration data.<br>The default value cannot be deleted, but it can be modified.<br>The allowed values must be alphanumeric with hyphen and underscore special characters.<br>Example: defaultNfProfileLevelAttrConfigData                                                                            |
| <b>Dns Srv</b>                 | This subsection provides information about DNS SRV scheme and port.                                                                                                                                                                                                                                                                                                                      |
| <b>Scheme</b>                  | Defines the default scheme to form the query for DNS SRV profile level FQDN.<br>Default value: https<br>Range: http or https                                                                                                                                                                                                                                                             |
| <b>Port Preference</b>         | Defines the path to retrieve the port values either from the DNS SRV record or from the configured notification attributes.<br>Default value: SRV_RECORD<br>Range: SRV_RECORD or STATIC_CONFIG <ul style="list-style-type: none"> <li>STATIC_CONFIG: Uses static configuration defined in notificationAttributes.port</li> <li>SRV_RECORD: Uses port from the DNS SRV record.</li> </ul> |
| <b>Notification Attributes</b> | This subsection provides information about notification attributes such as scheme, port, capacity, and priority, to create profile level default service objects.                                                                                                                                                                                                                        |
| <b>Scheme</b>                  | Defines the scheme to be used while creating default routing rules for notification requests when the scheme is not provided in the NF profile at profile level.<br>Default value: http<br>Range: http or https                                                                                                                                                                          |
| <b>Port</b>                    | Defines the port to be used while creating default routing rules for notification request when the port is not provided in the NF profile at profile level.<br>Default value: 80<br>Range: 1-65535                                                                                                                                                                                       |
| <b>Capacity</b>                | Defines the capacity to be used while creating default routing rules for notification requests when the capacity is not provided in the NF profile at profile level.<br>Default value: 65535<br>Range: 0-65535                                                                                                                                                                           |
| <b>Priority</b>                | Defines the priority to be used while creating default routing rules for notification requests when the priority is not provided in the NF profile at profile level.<br>Default value: 1<br>Range: 0-65535                                                                                                                                                                               |
| <b>Save</b>                    | Saves the configured values of all the fields.                                                                                                                                                                                                                                                                                                                                           |
| <b>Cancel</b>                  | Exits from the current configuration page.                                                                                                                                                                                                                                                                                                                                               |


## 4.2.42 Configuring NF Delegated Discovery Response Cache

Perform the following procedure to create, edit, and delete the rules for delegated discovery response caching configuration using the Cloud Native Configuration Console (CNC Console).

1. Log in to the CNC Console using your login credentials as described in *Oracle Communications Cloud Native Core, Service Communication Proxy User Guide*.
2. On the CNC Console Home page, in the upper pane, select the required SCP instance from the **Please Select Instance** drop-down list.

3. From the left navigation pane, click the **SCP** tab, and then click the **NF Discovery Response Cache Configuration** tab. The SCP Features section displays the list of two subtabs to be configured using the CNC Console:
  - a. NF Discovery Response Cache Configuration
  - b. NF Discovery Response Cache Configuration Data
4. From the left navigation pane, click the **NF Discovery Response Cache Configuration** subtab.
5. The **NF Discovery Response Cache Configuration** screen displays a list of rules saved in database.

**Figure 4-82 NF Discovery Response Cache Configuration**

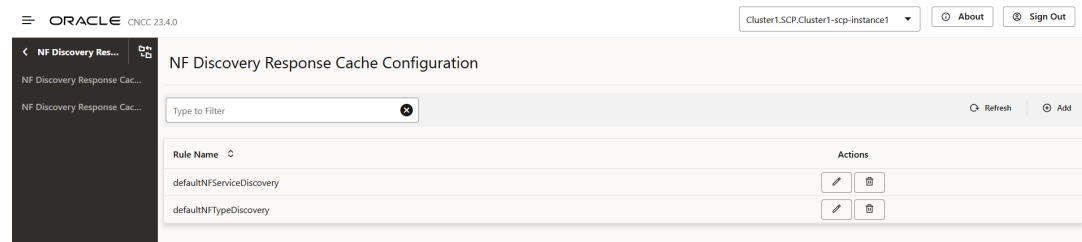

6. Click **Add** to create NF discovery response cache configuration rule. The **Add NF Discovery Response Cache Configuration Rule** screen allows you to configure the fields to create new rule as described in the following table:

**Table 4-64 Field Description**

| Field Names                        | Description                                                                                                                                                                                                                                                                                                                               |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rule Name                          | Indicates the name of the rule. This value should be unique.                                                                                                                                                                                                                                                                              |
| Target NF Type                     | Indicates the NF type of producer for which delegated discovery is being made. The allowed values for this field are: <ul style="list-style-type: none"> <li>* : This value denotes all the valid NF types.</li> <li>or</li> <li>a valid NF type that SCP supports.</li> </ul>                                                            |
| Service Names                      | Indicates the list of service names supported by producer NF for which delegated discovery is being made. The allowed values for this field are: <ul style="list-style-type: none"> <li>* : This value denotes all the service names for that target NF type.</li> <li>or</li> <li>a valid NF service that a NF type supports.</li> </ul> |
| Exclude Discovery Query Parameters | Indicates the list of Exclude Query Info objects. Maximum size of this list is 20.                                                                                                                                                                                                                                                        |

**Note**

For more information about valid NF type and services supported by SCP, see [Supported NF Types and Services](#) chapter in the *Oracle Communications Cloud Native Core, Service Communication Proxy User Guide*.

7. In the **Exclude Discovery Query Parameters** section, click **Add** to define the query header to exclude as described in the following table:

**Table 4-65 Field Description**

| Field              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Exclude Query Info | Exclude Query Info has one field called query Header. The value of this query header is one of the query parameters that is forwarded along with the discovery request to NRF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Query Header       | <p>Indicates the query parameters that is forwarded along with the discovery request to NRF.</p> <p>The allowed values for this field are:</p> <ul style="list-style-type: none"> <li>• None: This value denotes that caching is done for all the discovery responses.</li> <li>• *: This value denotes that caching will not be done for all the discovery responses.</li> <li>• SubscriberIds: An UE ID-related NF discovery query parameters.</li> <li>• Supported Query Parameters: The query parameters that is forwarded along with the discovery request to NRF. For more information, see '<a href="#">Supported Query Parameters</a>' chapter.</li> </ul> |

The following table lists the eight subscriber IDs covered by the keyword "SubscriberIds":

**Table 4-66 SubscriberIds**

| SubscriberIds           | Description                                                                                                                                                                                                                                                           |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| supi                    | If included, this Information Element (IE) shall contain the SUPI of the requester UE to search for an appropriate NF. SUPI may be included if the target NF type is "PCF," "CHF," "AUSF," "UDM," or "UDR."                                                           |
| ue-ipv4-address         | The IPv4 address of the UE for which a BSF or P-CSCF needs to be discovered.                                                                                                                                                                                          |
| ip-domain               | The IPv4 address domain of the UE for which a BSF needs to be discovered.                                                                                                                                                                                             |
| ue-ipv6-prefix          | The IPv6 prefix of the UE for which a BSF or P-CSCF needs to be discovered.                                                                                                                                                                                           |
| gpsi                    | If included, this IE shall contain the GPSI of the requester UE to search for an appropriate NF. GPSI may be included if the target NF type is "CHF," "PCF," "UDM," or "UDR."                                                                                         |
| external-group-identity | If included, this IE shall contain the external group identifier of the requester UE to search for an appropriate NF. This may be included if the target NF type is "UDM" or "UDR."                                                                                   |
| routing-indicator       | <p>Routing indicator information that allows to route network signaling with SUCI (see 3GPP 23.003 [12]) to an AUSF and UDM instance capable of serving the subscriber. May be included if the target NF type is "AUSF" or "UDM."</p> <p>Pattern: "^[0-9]{1,4}\$"</p> |
| msisdn                  | If included, this IE shall contain the external group identifier of the requester UE to search for an appropriate NF. This may be included if the target NF type is "UDM" or "UDR."                                                                                   |

8. Click **Add** to add the created rules.
9. Click **Remove** to remove the created or existing rules.
10. Click **Save** to save the updates.
11. Click **Cancel** to reset all the fields.
12. Click the **Edit** icon to edit the existing rule.  
The Edit NF Discovery Response Cache Configuration Rule screen allows you to configure the fields as described in the following table:

**Table 4-67 Field Description**

| Field                              | Description                                                                                                                                                                                                                   |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rule Name                          | Indicates the name of the rule. This value should be unique.                                                                                                                                                                  |
| Target NF Type                     | Indicates the NF type of producer for which delegated discovery is being made. The default value for this field is *, which denotes that caching will not be done for all the discovery responses.                            |
| Service Names                      | Indicates the list of service names supported by producer NF for which delegated discovery is being made. The default value for this field is *, which denotes that caching will not be done for all the discovery responses. |
| Exclude Discovery Query Parameters | Indicates the list of ExcludeQueryInfo objects. Maximum size of this list is 20.                                                                                                                                              |

**Note**

- **defaultNFTypeDiscovery** rule is applicable to any Model D request where discovery is happening without service names (in these requests, the 3gpp-sbi-discovery-service-names header is not present) and no other custom rule match is found. For this rule, caching will not happen for the list of query headers mentioned in the ExcludeQueryInfo.
- **defaultNFServiceDiscovery** rule is applicable to a Model D request where the request 3gpp-sbi-discovery-service-names header is also present in the incoming request and no other custom rule match is found. For this rule, caching will not happen for the list of query headers mentioned in the ExcludeQueryInfo.
- You cannot delete the default rules, but the exclude query info for these rules can be edited.

13. Click **Save**.

**Note**

By default, users can configure up to 100 rules using this API.



# 5

## Metrics

This chapter provides information about newly introduced and updated metrics and its dimensions.

The following table describes the SCP metric types used to measure the health and performance of SCP and its core functionalities:

**Table 5-1 Metric Type**

| Metric Type | Description                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Counter     | Represents the total number of occurrences of an event or traffic, such as measuring the total amount of traffic received and transmitted by SCP, and so on.         |
| Gauge       | Represents a single numerical value that changes randomly. This metric type is used to measure various parameters, such as SCP load values, memory usage, and so on. |
| Histogram   | Represents the number of occurrences that fall into predefined intervals, or buckets, such as those used for measuring response times.                               |

### 5.1 SCP OCI Metrics Dashboard

To upload the `ocscp_oci_metric_dashboard_25.2.100.zip` file on OCI Logging Analytics Dashboard Service, see *Oracle Communications Cloud Native Core, OCI Deployment Guide*. OCI does not support Grafana, OCI uses the Logging Analytics Dashboard Service for visualizing the metrics and logs.

### 5.2 Dimension Description

The following table provides information on Dimension of Metrics.

**Table 5-2 SCP Dimension Descriptions**

| Dimension             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocscp_nf_type         | Includes the producer NF type that is extracted from the URI of the message.<br>The sample values are UDM, PCF, AMF, and so on.                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| ocscp_nf_service_type | Service name of the producer NF in delegated discovery metrics. Includes the producer NF Service type that is extracted from the URI of the message.<br>The sample values are nudm-uecm, nudm-sdm, scpc-notification, and so on.<br><b>Note:</b> <ul style="list-style-type: none"><li>Notifications from NRF to scpc-notification will be pegged with the service type as scpc-notification.</li><li>The <code>ocscp_nf_service_type</code> dimension for notifications can be <code>n&lt;nfType&gt;-unknown</code> or <code>NA-unknown</code>, where <code>&lt;nfType&gt;</code> is any NF name.</li></ul> |

Table 5-2 (Cont.) SCP Dimension Descriptions

| Dimension                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocscp_req_msg_size            | Indicates the request message size buckets.<br>The sample values are 1(size < 1k bytes), 2 (1k < size < 2k bytes), 4 (2k < size < 4k ), and so on.                                                                                                                                                                                                                                                                                                                                         |
| ocscp_locality                | Indicates the SCP site name or locality name with which SCP is deployed.<br>The sample values are Loc6, Loc7, and so on.                                                                                                                                                                                                                                                                                                                                                                   |
| ocscp_fqdn                    | Includes the FQDN of SCP, which is used to deploy SCP.                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| plmn_id                       | It represents the PLMN of the destination where the request needs to be routed.                                                                                                                                                                                                                                                                                                                                                                                                            |
| ocscp_authority               | Includes the authority of SCP.<br>The sample value is FQDN:PORT or IP:PORT.<br><b>Note:</b> This dimension will get pegged only when it is enabled using <code>values.yaml</code> .<br><br><code>scpAuthorityMetricLabelDisabled: false</code>                                                                                                                                                                                                                                             |
| ocscp_message_type            | Includes the message type received at SCP. It can be of any of the following types: <ul style="list-style-type: none"> <li>• SERVICE_SPECIFIC_REQUEST</li> <li>• NOTIFICATION_OR_CALLBACK_REQUEST</li> </ul>                                                                                                                                                                                                                                                                               |
| ocscp_consumer_host           | Includes the consumer host details extracted from the user-agent header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.<br><b>Note:</b> The <code>ocscp_consumer_host</code> dimension will include the value <code>OCSCP-INITIATED-MSG</code> only in the case of SCP self-generated requests. These requests can be identified based on the header ( <code>x-ocscp-initiated-msg=true</code> ). |
| ocscp_consumer_nf_instance_id | Includes the consumer NF Instance ID details extracted from the user-agent header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.                                                                                                                                                                                                                                                                 |
| ocscp_consumer_nf_type        | Includes consumer NF type details extracted from the user-agent header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.                                                                                                                                                                                                                                                                            |
| ocscp_consumer_nf_unique_id   | Includes the consumer NF's Unique ID details extracted from the user-agent header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.                                                                                                                                                                                                                                                                 |
| ocscp_peer_nf_instance_id     | NF Instance ID of the peer to which message (request or response) is routed.<br>For requests, the NF instance ID is obtained from information on a known NF producer or consumer.<br><br>For responses, the NF Instance ID is obtained from the User-Agent/XFCC header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.                                                                            |

Table 5-2 (Cont.) SCP Dimension Descriptions

| Dimension                  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocscp_peer_nf_service_type | NF service type of peer to which message (request or response) is routed.<br><br>For requests, the NF service type is obtained from information on a known NF producer or consumer.<br><br>For responses, service type is obtained from learned information about NF extracted from the User-Agent/XFCC header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| action                     | Action taken ("error_sent" or "rerouted") on request throttling because of OCI enforcement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| scope                      | The OCI scope received in the OCI header.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| auditMode                  | The mode of Audit in which SCP performs with NRF using NRF discovery or management services.<br>The possible values are "nnrf-disc" Or "nnrf-mgmt"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| auditType                  | Type of audit triggered by the audit microservice. It can be an on-demand audit or a regular audit, depending on what triggered the audit. Example: A change in TSI from local to NRF will trigger an on-demand audit.<br>The possible values are "OnDemand" and "Scheduled".                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| bodyModified               | This dimension is used to know if the response received from mediation has any changes in the body that is sent in the request towards mediation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| bucketKey                  | The key used to maintain the value of the message rate in egress or ingress rate limit functionality.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| cause                      | The reason for the event's occurrence. The value can vary from one metric to another.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| cca_consumer_nflInstanceId | The NF instance ID of the consumer sending the CCA header.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| certificate_type           | The type of certificate used, such as primary server, secondary server, etc.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| certificate_type           | Indicates the type of certificates that are about to expire. The following are the valid applicable certificate types: <ul style="list-style-type: none"> <li>5G_SBI_SERVER_PRIMARY - Applicable for 5G SBI Server Primary certificate, used for Ingress traffic.</li> <li>5G_SBI_SERVER_SECONDARY - Applicable for 5G SBI Server Secondary certificate, used for Ingress traffic.</li> <li>5G_SBI_CLIENT_PRIMARY - Applicable for 5G SBI Client Primary certificate, used for Egress traffic.</li> <li>5G_SBI_CLIENT_SECONDARY - Applicable for 5G SBI Client Secondary certificate, used for Egress traffic.</li> <li>5G_SBI_TRAFFIC_FEED_PRIMARY - Applicable for 5G SBI Traffic Feed primary certificate, used for Data Director (kafka).</li> <li>5G_SBI_TRAFFIC_FEED_SECONDARY - Applicable for 5G SBI Traffic Feed secondary certificate, used for Data Director (kafka).</li> </ul> |
| coherenceCluster           | The name of the coherence cluster used in the SCP deployment.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| configurationName          | The name of the configuration that has changed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

Table 5-2 (Cont.) SCP Dimension Descriptions

| Dimension                 | Description                                                                                                                                                                                                             |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| cpu_level                 | The level for CPU utilization, whether it is under minor, major, or critical utilization levels based on the configurations.                                                                                            |
| dbOperation               | The DB operation that happened on a DB table. Example: find, findAll, save, saveAll, get, count, delete, deleteAll.                                                                                                     |
| destination               | Indicates the destination SVC, like scpc-notification, scp-nrfproxy, and so on.                                                                                                                                         |
| destination (TLS)         | Contains the destination address details involved in HTTPS connection.                                                                                                                                                  |
| detail                    | This dimension contains details about the issue that has happened.                                                                                                                                                      |
| duplicateTargetFqdn       | When a duplicate target fqdn is detected across different NRF SRV fqdns.                                                                                                                                                |
| error-reason              | Reason for ingress or egress connection failures.                                                                                                                                                                       |
| errorType                 | The error reason that caused notification processing to fail.                                                                                                                                                           |
| eventName                 | Showing the migration state of the NRF DNS SRV feature. Possible values are: <ul style="list-style-type: none"> <li>FEATURE_ENABLED</li> <li>START_NRF_RULE_PROCESSING</li> </ul>                                       |
| eventType                 | It shows the status of the egress requests on the Jetty client or the event type received in notification requests from NRF. This is used in different metrics, thus refer to the respective metric for interpretation. |
| failureReason             | Reasons for the failure of the NRF DNS SRV feature migration.                                                                                                                                                           |
| failureReason (TLS)       | Contains HTTPS connection failure reason (Handshake failure reason)                                                                                                                                                     |
| headerModified            | Indicates whether any header is modified by the mediation service in response.                                                                                                                                          |
| host_type                 | Indicates the host type used for sending the request. For example, "IP" or "FQDN".                                                                                                                                      |
| http_method               | Indicates the HTTP method of the request getting treatment for overload. For example, PUT, PATCH, POST, and so on.                                                                                                      |
| interScpHost              | Contains the host of the SCP to which the request is being sent.                                                                                                                                                        |
| is_from_local_cache       | Defines whether the NRF discovery response is retrieved from local cache (true) or NRF (false)                                                                                                                          |
| is_inter_plmn             | Defines whether NRF Delegated Discovery made is for inter plmn (true) or for intra plmn (false)                                                                                                                         |
| locality                  | The locality of the foreign NF.                                                                                                                                                                                         |
| lockEvent                 | The notification cache lock event (released or acquired)                                                                                                                                                                |
| msName                    | The name of the scp microservice.                                                                                                                                                                                       |
| nfInstanceId              | The producer NF instance ID.                                                                                                                                                                                            |
| nfProfileProcessingStatus | The status of the notification profile processing.                                                                                                                                                                      |
| nf_status                 | The status of NF, for example, REGISTERED.                                                                                                                                                                              |
| nfType                    | The NF type, for example, UDM.                                                                                                                                                                                          |
| notificationSource        | Indicates the source of notification received at the Notification microservice. It can be NRF or some SCP microservice.                                                                                                 |

Table 5-2 (Cont.) SCP Dimension Descriptions

| Dimension                                    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| rule_name                                    | Denotes the rule that matches one of the discovery headers in the excludeDiscoveryQuery List, and hence caching is skipped.                                                                                                                                                                                                                                                                                                                                                                         |
| ocscp_producer_nf_type                       | Includes the producer NF type.                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| nrfHost                                      | NRF FQDN or IP address configured for audit.                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| nrfRegionOrSetId                             | NRF region or SetId configured for audit                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| nrfSrvFqdn                                   | NRF Fqdn configured in DNS SRV                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| ocscp_alternate_nf_end_point                 | Selected alternate producer NF's end point.                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| ocscp_alternate_producer_host                | Selected alternate producer NF FQDN.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ocscp_alternate_producer_nf_instance_id      | Selected alternate producer NF's instance Id.                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| ocscp_alternate_producer_service_instance_id | Selected alternate producer NF's service instance Id.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ocscp_alternate_route_type                   | Alternate routing mechanism selected.                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ocscp_attempted_producers                    | List of attempted producers before sending back an error response to the consumer.                                                                                                                                                                                                                                                                                                                                                                                                                  |
| ocscp_sub                                    | Requester NF instance ID in the oauth2 token request.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ocscp_aud                                    | Target NF instance ID in the oauth2 token request.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| ocscp_cause                                  | <p>Traffic Feed Metrics: Provides information on the cause of traffic feed failures (for example, unreachable, noleader, incorrect data director configuration).</p> <p>Routing Metrics: Provides information on the cause of routing failures. (for example, UnknowHostException, Circuit Breaking)</p> <p>Rate limit Metrics: Provides information on the cause for the rate limit not being applied (for example, configuration not found).</p>                                                  |
| ocscp_configured_egress_rate                 | Configured rate of egress rate limit for a NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| ocscp_configured_ingress_rate                | Configured rate of ingress rate limit for a NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| ocscp_egress_rl_bucketkey                    | Key name for egress rate limit bucket.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| ocscp_error_condition                        | Error Condition resulting in routing attempt failure.                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ocscp_error_group                            | <p>Error group for error condition resulting in Routing Attempt Failure (for example, Destination webclient connection failure).</p> <p>Possible values:</p> <ul style="list-style-type: none"> <li>• Destination webclient response timeout</li> <li>• Destination webclient Connection Failure</li> <li>• Destination webclient unknow exception</li> <li>• NRFProxy Client Response Timeout</li> <li>• NRFProxy Client Connection Failed</li> <li>• NRFProxy Client Unknown Exception</li> </ul> |
| ocscp_ingress_rl_bucketkey                   | Key name for the ingress rate limit bucket.                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| ocscp_ingress_rl_headerformat                | The User Agent header format used by SCP to extract consumer host information to apply an ingress rate limit.                                                                                                                                                                                                                                                                                                                                                                                       |
| ocscp_ingress_rl_headername                  | Headers used to apply the ingress rate limit.                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| ocscp_med_upstream_service_time              | Time taken for mediation processing in milliseconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ocscp_mediation_filtername                   | Name of the filter applied to send a request towards mediation.                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| ocscp_mediation_triggerpoint                 | Trigger point used to send requests toward mediation.                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Table 5-2 (Cont.) SCP Dimension Descriptions

| Dimension                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocscp_nexthop_scp_fqdn             | FQDN of the selected SCP for interscp requests.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| ocscp_nf_end_point                 | <ul style="list-style-type: none"> <li>The endpoint details of producer NF or SEPP for interplmn scenario.</li> <li>The endpoint details of producer NF or SCP for interscp scenario.<br/>The endpoint can be an FQDN or IP address.</li> </ul> <p>The value of the ocscp_nf_end_point dimension can be "fqdn:port" if SCP routes the request using FQDN or "IP:port" if SCP routes the request using IP.</p> <ul style="list-style-type: none"> <li>If the profile does not have an IP address, the value is "fqdn:port".</li> <li>If the profile has both IP address and FQDN, the value is "IP:port" as SCP provides preference to IP if the egress_host_preference feature is disabled.</li> <li>If the egress_host_preference feature is enabled, SCP can use either an IP address or FQDN based on the configuration.</li> <li>If the egress_host_preference feature is enabled and if FQDN is configured for routing, SCP uses resolved "IP:port" if the fqdnResolution is nfProfile or "FQDN:port" if the fqdnResolution is DNS.</li> </ul> |
| ocscp_nf_instance_id               | Producer NF instance ID for health check metrics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| ocscp_nf_setid                     | The NF setid of selected producer NF. If nfsetid is present in the discovery headers or routing binding headers, retrieve it from there; otherwise, it should be extracted from the nfprofile of producer.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ocscp_nrf_service_type             | Service name of the NRF NF in delegated discovery metrics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| ocscp_peer_scp_fqdn                | The FQDN of peer SCP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ocscp_peer_scp_instance_id         | The NF instance Id of peer SCP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| ocscp_primary_producer_fqdn        | The FQDN of the selected primary producer NF, in the case of alternate routing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| ocscp_processing_time              | The bucket list of SCP requests or response processing times.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| ocscp_producer_host                | The FQDN of selected producer NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| ocscp_producer_nf_fqdn             | The FQDN of producer NF for InterSCP Metrics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| ocscp_producer_nf_instance_id      | <ul style="list-style-type: none"> <li>The NF Instance Id of producer NF or SEPP for interplmn scenario.</li> <li>The NF Instance Id of producer NF or SCP for interscp scenario.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ocscp_producer_nf_type             | The NF Type of producer NF selected by SCP.(For example, UDM, PCF and so on)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ocscp_producer_service_instance_id | <ul style="list-style-type: none"> <li>The service instance ID of producer NF or SEPP for interplmn scenario.</li> <li>The service instance ID of producer NF or SCP for interscp scenario.</li> </ul> <p>Possible Values:<br/>Service instance ID format as defined in the specification.<br/>"NA" if service instance ID is unavailable.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

Table 5-2 (Cont.) SCP Dimension Descriptions

| Dimension                   | Description                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocscp_res_msg_size          | Message size of the response sent by SCP to the consumer.<br>Message size buckets. for example, 1 (size < 1k bytes), 2 (1k < size < 2k bytes), 4 (2k < size < 4k), etc.                                                                                                                                                                                                      |
| ocscp_response_code         | Response code sent by SCP to the consumer (for example, a success response such as 200 or 201, an error response such as 503, 400, and so on.)                                                                                                                                                                                                                               |
| ocscp_response_code_class   | Response code class of response code sent by SCP to the consumer. (For example, response code class 2xx for success responses, 5xx, 4xx, or 3xx for error responses.)                                                                                                                                                                                                        |
| ocscp_scope                 | Scope NF Load received is applicable to nfiInstance or serviceInstance.                                                                                                                                                                                                                                                                                                      |
| ocscp_scp_end_point         | Producer SCP endpoint details for interSCP metrics.<br>Endpoint details can contain a FQDN or IP address.                                                                                                                                                                                                                                                                    |
| ocscp_scp_instance_id       | Producer SCP instance ID for interSCP metrics.                                                                                                                                                                                                                                                                                                                               |
| ocscp_sepp_end_point        | Selected SEPP endpoint details for InterPLMN metrics.<br>Endpoint details can contain a FQDN or IP address.                                                                                                                                                                                                                                                                  |
| ocscp_sepp_fqdn             | Selected SEPP FQDN details for InterPLMN metrics.                                                                                                                                                                                                                                                                                                                            |
| ocscp_sepp_instance_id      | Selected SEPP instance ID for InterPLMN metrics.                                                                                                                                                                                                                                                                                                                             |
| ocscp_server_header         | Server header received in case of failure received from side car.                                                                                                                                                                                                                                                                                                            |
| ocscp_threshold_level       | The CPU threshold level.                                                                                                                                                                                                                                                                                                                                                     |
| ocscp_upstream_service_time | The time taken to receive a response from producer NF.                                                                                                                                                                                                                                                                                                                       |
| peer_info                   | The NF instance ID of the peer for which the load is reported.                                                                                                                                                                                                                                                                                                               |
| pod_name                    | The pod name for which metric is pegged.                                                                                                                                                                                                                                                                                                                                     |
| PrimaryEndPoint             | Primary end point selected by SCP for routing before alternate routing.                                                                                                                                                                                                                                                                                                      |
| processingTimeInMs          | Total time taken for notification processing in milliseconds.                                                                                                                                                                                                                                                                                                                |
| queueCapacity               | Notification Metrics: Maximum Notification queue size (runQueue:40, notificationQueue:5000, waitingQueue: 5000)<br>Nrf Proxy Metrics: Maximum size is 10000.<br>Load Manager Metrics: Maximum size is 10000.<br>Cache Metrics: The maximum size of the queue is 30000 for scpCacheExecutorQueue and 10000 for others.<br>Worker Metrics: Metrics: The maximum size is 10000. |

Table 5-2 (Cont.) SCP Dimension Descriptions

| Dimension                             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| queueName                             | Notification Queue Name (runQueue, notificationQueue, waitingQueue)<br><br>NRF Proxy Metrics: Name of the nrf-proxy queue (scpDownstreamExecutorQueue, scpUpstreamExecutorQueue)<br><br>Load Manager Metrics: Name of the queue (sutLciCohEvExecutorQueue, sutLciAppEvExecutorQueue, peerLciCohEvExecutorQueue, peerLciAppEvExecutorQueue, loadCohEvExecutorQueue, loadAppEvExecutorQueue)<br><br>Cache Metrics: Name of the queue (scpCacheExecutorQueue, accessTokenAppEvExecutorQueue, accessTokenCohEvExecutorQueue)<br><br>Worker Metrics: Name of the queue (scpDownstreamExecutorQueue, scpUpstreamExecutorQueue, scpNrfProxyDownstreamExecutorQueue, scpClientExecutorQueue, scpUpdateSSLCertsQueue, scpMediationDownstreamExecutorQueue, scpReconfigureEgressRLExecutorQueue) |
| reqType                               | The request type for the oauth token request (for example, ondemand or proactive).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| requester_nfType                      | The requester NF Type received the request for oauth token.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| requestType                           | The HTTP method of request received on configuration (for example, GET, PUT, or DELETE).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| responseCode                          | The HTTP status code in the response from SCP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| responseCodeClass                     | The HTTP status code class in response to SCP (For example, the response code is 2xx for success responses, 5xx, 4xx, or 3xx for error responses.)<br>The possible values are "OnDemand" and "Scheduled".                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| sbi_message_priority                  | The value of the sbi_message_priotiy header in the request received.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| scheme                                | The scheme received in the rx request or the scheme of the selected producer for the tx request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| scp_local_coh_cluster_name            | The SCP local coherence cluster name.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| scp_nf_instance_id                    | The NF instance ID of SCP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| scp_remote_coh_cluster_fqdn           | The remote SCP coherence cluster FQDN.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| scp_remote_coh_cluster_name           | The remote SCP coherence cluster name.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| scp_remote_coh_cluster_nf_instance_id | The remote SCP coherence cluster NF instance ID.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| scp_remote_coh_cluster_port           | The remote SCP coherence cluster port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| scp_service                           | The SCP microservice name for which metric is pegged.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| service_proto_name                    | The service proto-name used for DNS SRV resolution.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| severity                              | The severity of the condition.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| source                                | The Microservice from which the request was originated.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| source (TLS)                          | Contains the source address details involved in HTTPS connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| status                                | The health check status code.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| status_code                           | The response status code.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



Table 5-2 (Cont.) SCP Dimension Descriptions

| Dimension                                    | Description                                                                                                                                                                                                                                                      |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| subscriber_info_present                      | If any of the following discovery headers are present in the request: 3gpp-sbi-discovery-supi, 3gpp-sbi-discovery-gpsi, 3gpp-sbi-discovery-external-group-identity, 3gpp-sbi-discovery-routing-indicator, 3gpp-sbi-discovery-msisdn, or 3gpp-sbi-discovery-imsi. |
| subscriber_info_present_in_discovery_headers | If any of the following discovery headers are present in the request: 3gpp-sbi-discovery-supi, 3gpp-sbi-discovery-gpsi, 3gpp-sbi-discovery-external-group-identity, 3gpp-sbi-discovery-routing-indicator, 3gpp-sbi-discovery-msisdn, or 3gpp-sbi-discovery-ims.  |
| successRspType                               | The success response code received for the health check.                                                                                                                                                                                                         |
| tableName                                    | The table name indicates which operation is performed. For example, SERVICE_ENTRIES.                                                                                                                                                                             |
| target_nfType                                | The NF type in oauth access token request.                                                                                                                                                                                                                       |
| targetFqdn                                   | The NF FQDN in an oauth access token request.                                                                                                                                                                                                                    |
| taskId                                       | The NRF DNS SRV migration task ID.                                                                                                                                                                                                                               |
| taskName                                     | The NRF DNS SRV migration task name.                                                                                                                                                                                                                             |
| taskState                                    | The NRF DNS SRV migration task state.                                                                                                                                                                                                                            |
| timeInMs                                     | The time taken in Notification queues.                                                                                                                                                                                                                           |
| title                                        | The error reason for Health check failure.                                                                                                                                                                                                                       |
| triggerpoint                                 | The mediation triggerpoint                                                                                                                                                                                                                                       |
| tls_version                                  | Indicates the TLS version used to establish the HTTPS connection.<br><b>Note:</b> In some failure cases, the TLS version will not be available and will be displayed as "NA"                                                                                     |
| refresh_status                               | Indicates whether the invalidated cache record at the scp-worker is successfully refreshed.                                                                                                                                                                      |
| valid_NRF_response_to_fail                   | Whether SCP converts 200 OK (NRF) to 400 error due to an empty profile list.                                                                                                                                                                                     |
| validation_type                              | The validation type for CCA.                                                                                                                                                                                                                                     |
| kafka_partition_id                           | Partition ID of the Kafka partition, which is selected for traffic feed messages For the partition selection strategy "RoundRobin," partitions are not known to the SCP application, thus the partition ID is used as "NA".                                      |
| kafka_broker_id                              | The broker ID of the Kafka partition leader is selected for the traffic feed message. For the partition selection strategy "RoundRobin," broker IDs are not known to the SCP application, thus the broker ID is used as "NA".                                    |
| ocscp_object_pool_name                       | The name of the object pool in the case of multiple object pool implementations.                                                                                                                                                                                 |
| ocscp_worker_client_name                     | The name of the async client for identification of pool objects paraphrase.                                                                                                                                                                                      |
| ocscp_object_trans_state                     | The transaction status of pool objects during the transaction timeout for pool objects.                                                                                                                                                                          |
| clash_type                                   | The cause of clash for pool objects.                                                                                                                                                                                                                             |
| ocscp_attempted_producers                    | This is a list of producer FQDNs or IPs attempted for a particular SBI message.                                                                                                                                                                                  |
| ocscp_timeout_point                          | Indicates the location where the metric was recorded.                                                                                                                                                                                                            |

Table 5-2 (Cont.) SCP Dimension Descriptions

| Dimension                           | Description                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ocscp_requester_nfType              | Specifies the type of requester NF that was received in the request for the OAuth token.                                                                                                                                                                                                                                                                                                                                  |
| ocscp_target_nfType                 | Specifies the target NF type in the OAuth access token request.                                                                                                                                                                                                                                                                                                                                                           |
| ocscp_validation_failure            | Indicates the type of validation failure for the timestamp header.                                                                                                                                                                                                                                                                                                                                                        |
| ocscp_mediation_udv_name            | This dimension indicates the name of the user-defined mediation variable.                                                                                                                                                                                                                                                                                                                                                 |
| ocscp_mediation_udv_max_usage_limit | The integer limit for the maximum per transaction usage of mediation user-defined variables.                                                                                                                                                                                                                                                                                                                              |
| ocscp_nf_type_nf_service_type       | The concatenated value of nfType and nfService.                                                                                                                                                                                                                                                                                                                                                                           |
| alternate_route_cause               | This dimension indicates the cause of alternate routing when SCP initiates alternate routing, such as ErrorReceived, Timeout, or ConnectionError.                                                                                                                                                                                                                                                                         |
| producer_nf_info                    | <p>This dimension provides information about the destination producer NF Type and the destination NF service name of the request message, separated by a hyphen.</p> <p><b>Format:</b> &lt;NF Type&gt;-&lt;NF Service Name&gt;<b>Example:</b> UDM-nudn-uecm</p> <p>The value of the dimension follows the format &lt;NFTYPE&gt;-&lt;NFSERVICE&gt;, where NFTYPE is always in uppercase and NFSERVICE is in lowercase.</p> |

**Note**

- The values for these dimensions, such as ocscp\_consumer\_host, ocscp\_consumer\_nf\_instance\_id, and ocscp\_consumer\_nf\_type are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats.
- In the notification message type, certain dimension values such as ocscp\_nf\_service\_type, ocscp\_nf\_setid, and ocscp\_nf\_type may not qualify for pegging. In the scenario where the service name cannot be derived from the PATH URI, pegging will not take place, and if these dimensions are identified through headers, pegging will occur.

## 5.2.1 Metrics

The following table provides information about metrics for SCP.

**Caution**

User, computer and applications, and character encoding settings may cause an issue when copy-pasting commands or any content from PDF. The PDF reader version also affects the copy-pasting functionality. It is recommended to verify the pasted content when the hyphens or any special characters are part of the copied content.

**Note**

- Note that Kubernetes-based dimensions, such as pod name or namespace, require updates based on the Prometheus deployment.
- All the metrics with HTTP in their names are pegged for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
- All the counter metrics of SCP can achieve a maximum value of 1.7976931348623157E308, that is,  $1.7976931348623157 \times 10^{308}$ . When the maximum value is achieved, it gets reset to 0. To achieve this maximum value, it requires unlimited time.

**Table 5-3** ocscp\_metric\_http\_rx\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>The total number of incoming HTTP requests at the scp-worker service. The ocscp_nf_service_type dimension for notification is "n&lt;nfType&gt;-unknown or NA-unknown".</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Dimension   | <p><b>Non OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>• ocscp_nf_type (for example, UDM, PCF, AMF, and so on)</li> <li>• ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on)</li> <li>• ocscp_req_msg_size (The request message size buckets, for example, 1 (size &lt; 1k bytes), 2 (1k &lt; size &lt; 2k bytes), 4 (2k &lt; size &lt; 4k), and so on.)</li> <li>• ocscp_locality (SCP site name, for example, Loc6, Loc7, and so on)</li> <li>• ocscp_fqdn (contains fqdn of scp)</li> <li>• plmn_id(mnc123-mcc254)</li> <li>• ocscp_authority</li> <li>• ocscp_message_type</li> <li>• ocscp_consumer_host</li> <li>• ocscp_consumer_nf_instance_id</li> <li>• ocscp_consumer_nf_type</li> <li>• ocscp_consumer_nf_unique_id</li> <li>• These dimensions are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats.</li> <li>• The ocscp_consumer_host dimension for the metric can have an "OCSCP-INITIATED-MSG" value if the request is an SCP self-generated request.</li> </ul> <p><b>OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>• NFSERVICETYPE</li> <li>• REQUESTMSGSIZE</li> <li>• PLMNID</li> <li>• SCPAUTHORITY</li> <li>• MSGTYPE</li> <li>• consumerInfo</li> <li>• CONSUMERUNIQUEID</li> </ul> |

Table 5-3 (Cont.) ocscp\_metric\_http\_rx\_req\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_http_rx_req_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_req_msg_size="2"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}</li> <li>ocscp_message_type="SERVICE_SPECIFIC_REQUEST"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_consumer_nf_type="SMF"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_consumer_nf_unique_id="SE1SMSF1"}</li> <li>ocscp_metric_http_rx_req_total{ocscp_message_type="NOTIFICATION_OR_CALLBACK_REQUEST", ocscp_nf_type="NA", ocscp_nf_service_type="NA-unknown"}</li> </ul> |

Table 5-4 ocscp\_metric\_http\_tx\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>The total number of HTTP requests forwarded by SCP to the upstream cluster. Each SCP-worker pod will peg this metric.</p> <p>The ocscp_nf_service_type dimension for notification is "n&lt;nfType&gt;-unknown or NA-unknown".</p> <p><b>Note:</b> The ocscp_authority dimension will get pegged only when it is enabled using the value.yaml file. scpAuthorityMetricLabelDisabled: false</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

Table 5-4 (Cont.) ocscp\_metric\_http\_tx\_req\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <p><b>Non OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>• ocscp_nf_type (for example, UDM, PCF, AMF, and so on)</li> <li>• ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on)</li> <li>• ocscp_nf_end_point (Default value = NA)</li> <li>• ocscp_locality (SCP site name for example, Loc6, Loc7, and so on)</li> <li>• ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, and so on. Default value = NA)</li> <li>• ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, and so on. Default value = NA)</li> <li>• ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>• ocscp_nf_setid (set1.udmset.5gc.mnc012.mcc345, default value = "UNKNOWN")</li> <li>• plmn_id(mnc123-mcc254)</li> <li>• ocscp_fqdn(contains fqdn of scp)</li> <li>• ocscp_authority</li> <li>• ocscp_message_type</li> <li>• ocscp_consumer_host</li> <li>• ocscp_consumer_nf_instance_id</li> <li>• ocscp_consumer_nf_type</li> <li>• ocscp_consumer_nf_unique_id</li> <li>• These dimensions are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats.</li> <li>• The ocscp_consumer_host dimension for the metric can have an "OCSCP-INITIATED-MSG" value if the request is an SCP self-generated request.</li> </ul> <p><b>OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>• NFSERVICETYPE</li> <li>• producerHost</li> <li>• Nfid</li> <li>• NFSETID</li> <li>• PLMNID</li> <li>• SCPAUTHORITY</li> <li>• MSGTYPE</li> <li>• consumerInfo</li> <li>• CONSUMERUNIQUEID</li> </ul> |

Table 5-4 (Cont.) ocscp\_metric\_http\_tx\_req\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_http_tx_req_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_nf_end_point="10.96.166.65:80"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_nf_setid="set1.udmset.5gc.mnc012.mcc345"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}</li> <li>ocscp_message_type="NOTIFICATION_OR_CALLBACK_REQUEST"</li> <li>ocscp_metric_http_tx_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_consumer_nf_type="SMF"}</li> <li>ocscp_metric_http_tx_req_total{ocscp_consumer_nf_unique_id="SE1SMSF1"}</li> </ul> |

Table 5-5 ocscp\_metric\_http\_rx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Total number of HTTP responses received by SCP with specific HTTP response codes (for example, 201, 503, and so on). Each SCP-Worker pod will peg this metric.</p> <p>The ocscp_nf_service_type dimension for notification is "n&lt;nfType&gt;-unknown or NA-unknown".</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                              |

Table 5-5 (Cont.) ocscp\_metric\_http\_rx\_res\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <p><b>Non OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>• ocscp_response_code (for example, 201, 503, 404, and so on.)</li> <li>• ocscp_nf_type (for example, UDM, PCF, AMF, and so on.)</li> <li>• ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>• ocscp_nf_end_point (Default value = 0.0:00)</li> <li>• ocscp_locality (SCP site name for example, Loc6, Loc7, and so on.)</li> <li>• ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, and so on. Default value = NA)</li> <li>• ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, and so on. Default value = NA)</li> <li>• ocscp_res_msg_size (The response message size buckets. For example, 1 (size &lt; 1k bytes), 2 (1k &lt; size &lt; 2k bytes), 4 (2k &lt; size &lt; 4k ), and so on.)</li> <li>• ocscp_response_code_class (e.g., 2, 5, and so on.)</li> <li>• ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>• ocscp_nf_setid(e.g, set1.udmset.5gc.mnc012.mcc345, default value = "UNKNOWN")</li> <li>• plmn_id(mnc123-mcc254)</li> <li>• ocscp_fqdn(contains fqdn of scp)</li> <li>• ocscp_authority</li> <li>• routing_options_config</li> </ul> <p><b>Note:</b> These dimensions are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats.</p> <p><b>OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>• NFSERVICETYPE</li> <li>• producerHost</li> <li>• Nfid</li> <li>• RESPONSECODE</li> <li>• RESPONSEMSGSIZE</li> <li>• NFSETID</li> <li>• PLMNID</li> <li>• SCPAUTHORITY</li> </ul> |

Table 5-5 (Cont.) ocscp\_metric\_http\_rx\_res\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_http_rx_res_total{ocscp_response_code="201"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_nf_end_point="10.96.166.65:80"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_res_msg_size="2"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_response_code_class="2"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_nf_setid="set1.udmset.5gc.mnc012.mcc345"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_http_rx_res_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}</li> </ul> |

Table 5-6 ocscp\_metric\_http\_tx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Total number of HTTP responses forwarded by SCP back to the consumer or request originator with specific HTTP response codes (For example, 201, 503, and so on) Each SCP-worker pod will peg this metric when sending the response back to the consumer.</p> <p>The ocscp_nf_service_type dimension for notification is "n&lt;nfType&gt;-unknown or NA-unknown".</p> <p><b>Note:</b> The ocscp_authority dimension will get pegged only when it is enabled using the <code>value.yaml</code> file. <code>scpAuthorityMetricLabelDisabled: false</code></p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



Table 5-6 (Cont.) ocscp\_metric\_http\_tx\_res\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <p><b>Non OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>ocscp_response_code (for example, 201, 503, 404, and so on.)</li> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_locality (SCP site name for example, Loc6, Loc7, and so on.)</li> <li>ocscp_response_code_class (for example, 2, 5, and so on.)</li> <li>ocscp_fqdn(contains fqdn of scp)</li> <li>ocscp_authority</li> <li>plmn_id(mnc123-mcc254)</li> <li>ocscp_consumer_host</li> <li>ocscp_consumer_nf_instance_id</li> <li>ocscp_consumer_nf_type</li> <li>ocscp_consumer_nf_unique_id</li> </ul> <p><b>Note:</b> The ocscp_consumer_host dimension for the metric can have an "OCSCP-INITIATED-MSG" value if the request is an SCP self-generated request.</p> <p><b>OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>NFSERVICETYPE</li> <li>RESPONSECODE</li> <li>PLMNID</li> <li>SCPAUTHORITY</li> <li>consumerInfo</li> <li>CONSUMERUNIQUEID</li> </ul> |
| Example   | <ul style="list-style-type: none"> <li>ocscp_metric_http_tx_res_total{ocspf_response_code="201"}</li> <li>ocscp_metric_http_tx_res_total{ocspf_nf_type="UDM"}</li> <li>ocscp_metric_http_tx_res_total{ocspf_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_http_tx_res_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_http_tx_res_total{ocscp_response_code_class="2"}</li> <li>ocscp_metric_http_tx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_http_tx_res_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}</li> <li>ocscp_metric_http_tx_res_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_http_tx_res_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_metric_http_tx_res_total{ocscp_consumer_nf_type="SMF"}</li> <li>ocscp_metric_http_tx_res_total{ocscp_consumer_nf_unique_id="SE1SMSF1"}</li> </ul>                                                                                            |

Table 5-7 ocscp\_metric\_attempts\_to\_forward\_route\_total

| Field       | Details                                                                 |
|-------------|-------------------------------------------------------------------------|
| Description | Total number of requests that matched the catch-all-route routing rule. |
| Type        | Counter                                                                 |

Table 5-7 (Cont.) ocscp\_metric\_attempts\_to\_forward\_route\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_nf_end_point (Default value = 0.0:00)</li> <li>ocscp_locality (SCP site name for example, Loc6, Loc7, and so on.)</li> <li>ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_fqdn(contains fqdn of scp)</li> </ul>                                                                                                                                                   |
| Example   | <ul style="list-style-type: none"> <li>ocscp_metric_attempts_to_forward_route_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_attempts_to_forward_route_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_attempts_to_forward_route_total{ocscp_nf_end_point="10.96.166.65:80"}</li> <li>ocscp_metric_attempts_to_forward_route_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_attempts_to_forward_route_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_attempts_to_forward_route_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_attempts_to_forward_route_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-8 ocscp\_metric\_routing\_attempt\_fail\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Total number of request that SCP failed to route due to any reason.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on).</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on).</li> <li>ocscp_nf_end_point (default value = NA)</li> <li>ocscp_locality (SCP site name, for example, Loc6, Loc7, and so on.)</li> <li>ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc., default value = NA)</li> <li>ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b01, etc., default value = NA)</li> <li>ocscp_error_group</li> <li>ocscp_producer_host (default value = NA, contains the fqdn of the producer)</li> <li>ocscp_fqdn (contains the fqdn of scp)</li> </ul> |

Table 5-8 (Cont.) ocscp\_metric\_routing\_attempt\_fail\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_routing_attempt_fail_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_routing_attempt_fail_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_routing_attempt_fail_total{ocscp_nf_end_point="10.96.166.65:80"}</li> <li>ocscp_metric_routing_attempt_fail_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_routing_attempt_fail_total{ocscp_producer_nf_instance_id="6faf1b-bc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_routing_attempt_fail_total{ocscp_producer_service_instance_id="f-e137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_routing_attempt_fail_total{ocscp_error_group="ocscp.http.routing_failure.connect_failure"}</li> <li>ocscp_metric_routing_attempt_fail_total(ocscp_producer_host="udm1svc.default.svc.cluster.local")</li> <li>ocscp_metric_routing_attempt_fail_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-9 ocscp\_metric\_request\_processing\_time\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric captures the processing time by SCP for ingress requests into the time buckets, for example, 1ms, 2ms, 4ms, 8ms and so on.                                                                                                                                                                                                   |
| Type        | Histogram                                                                                                                                                                                                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_processing_time (for example, 1ms, 2ms, 4ms, 8ms, 16ms, 32ms, 64ms, 128ms, 256ms, 500ms, 1000ms, 2000ms, 3000ms, 5000ms, 10000ms, 15000ms, &gt;15000ms)</li> <li>ocscp_fqdn (contains fqdn of scp)</li> </ul> |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_request_processing_time_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_request_processing_time_total{ocscp_processing_time="1ms"}</li> <li>ocscp_metric_request_processing_time_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul>             |

Table 5-10 ocscp\_metric\_response\_processing\_time\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                   |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric captures the processing time by SCP for ingress responses into the time buckets (for example, 1ms, 2ms, 4ms, 8ms and so on).                                                                                                                                                                                                  |
| Type        | Histogram                                                                                                                                                                                                                                                                                                                                 |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_processing_time (for example, 1ms, 2ms, 4ms, 8ms, 16ms, 32ms, 64ms, 128ms, 256ms, 500ms, 1000ms, 2000ms, 3000ms, 5000ms, 10000ms, 15000ms, &gt;15000ms.)</li> <li>ocscp_fqdn (contains fqdn of scp)</li> </ul> |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_response_processing_time_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_response_processing_time_total{ocscp_processing_time="1ms"}</li> <li>ocscp_metric_response_processing_time_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul>           |

**Table 5-11 ocscp\_metric\_request\_per\_try\_timeout\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric captures the number of incoming request whose per try timeout expired.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_nf_end_point (Default value = NA)</li> <li>ocscp_locality (SCP site name for example, Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>ocscp_nf_setid(e.g, set1.udmset.5gc.mnc012.mcc345, default value = "UNKNOWN")</li> <li>ocscp_fqdn (contains fqdn of scp)</li> </ul>                                                                                                                                                                                           |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_request_per_try_timeout_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_request_per_try_timeout_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_request_per_try_timeout_total{ocscp_nf_end_point="10.96.166.65:80"}</li> <li>ocscp_metric_request_per_try_timeout_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_request_per_try_timeout_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_request_per_try_timeout_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_request_per_try_timeout_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_request_per_try_timeout_total{ocscp_nf_setid="set1.udmset.5gc.mnc012.mcc345"}</li> <li>ocscp_metric_request_per_try_timeout_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-12 ocscp\_metric\_transaction\_timeout\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric captures the total number of request whose transaction timed out.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_nf_end_point (Default value = NA)</li> <li>ocscp_locality (SCP site name for example, Loc6, Loc7, and so on.)</li> <li>ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, and so on. Default value = NA)</li> <li>ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, and so on. Default value = NA)</li> <li>ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>ocscp_fqdn (contains fqdn of scp)</li> </ul> |

Table 5-12 (Cont.) ocscp\_metric\_transaction\_timeout\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_transaction_timeout_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_transaction_timeout_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_transaction_timeout_total{ocscp_nf_end_point="10.96.166.65:80"}</li> <li>ocscp_metric_transaction_timeout_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_transaction_timeout_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_transaction_timeout_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_transaction_timeout_total(ocscp_producer_host="udm1svc.default.svc.cluster.local")</li> <li>ocscp_metric_transaction_timeout_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-13 ocscp\_metric\_max\_routing\_attempts\_exhausted\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric captures the total number of requests whose maximum routing attempts expired during alternate routing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_locality (SCP site name for example, Loc6, Loc7, and so on.)</li> <li>ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, and so on. Default value = NA)</li> <li>ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_fqdn (contains fqdn of scp)</li> </ul>                                                                                                                                   |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_max_routing_attempts_exhausted_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_max_routing_attempts_exhausted_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_max_routing_attempts_exhausted_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_max_routing_attempts_exhausted_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_max_routing_attempts_exhausted_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_max_routing_attempts_exhausted_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-14 ocscp\_notifications\_rejected\_topologysource\_local\_total

| Field       | Details                                                                                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Number of NF notification messages rejected because "learning from NRF" was configured as "not allowed".</p> <p>Metrics Pegging Condition:</p> <p>This metrics will be pegged whenever notification is received for NF configured as LOCAL.</p> |
| Type        | Counter                                                                                                                                                                                                                                            |

**Table 5-14 (Cont.) ocscp\_notifications\_rejected\_topologysource\_local\_total**

| Field     | Details                                                                                                                                                                                         |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>nfType (for example: UDM, AMF)</li> <li>ocscp_fqdn</li> </ul>                                                                                            |
| Example   | <ul style="list-style-type: none"> <li>scp_local_topology_source_total{nfType = "UDM"}</li> <li>scp_local_topology_source_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-15 ocscp\_topologysource\_toggle\_nrf\_to\_local\_total**

| Field       | Details                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times topology source changed from "NRF" to "Local" for given NF.                                                                                                                                               |
| Type        | Counter                                                                                                                                                                                                                   |
| Dimension   | <ul style="list-style-type: none"> <li>nfType (for example: UDM, AMF)</li> <li>ocscp_fqdn</li> </ul>                                                                                                                      |
| Example     | <ul style="list-style-type: none"> <li>scp_topologysource_toggle_nrf_to_local_total{nfType = "UDM"}</li> <li>scp_topologysource_toggle_nrf_to_local_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-16 ocscp\_topologysource\_toggle\_local\_to\_nrf\_total**

| Field       | Details                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times topology source changed from "Local" to "NRF" for given NF.                                                                                                                                               |
| Type        | Counter                                                                                                                                                                                                                   |
| Dimension   | <ul style="list-style-type: none"> <li>nfType (for example: UDM, AMF)</li> <li>ocscp_fqdn</li> </ul>                                                                                                                      |
| Example     | <ul style="list-style-type: none"> <li>scp_topologysource_toggle_local_to_nrf_total{nfType = "UDM"}</li> <li>scp_topologysource_toggle_local_to_nrf_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-17 ocscp\_db\_operation\_failure\_total**

| Field       | Details                                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times audit failed due to database failure.                                                                                                                                                                         |
| Type        | Counter                                                                                                                                                                                                                       |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>dbOperation (eg: find, findAll, save, saveAll, get, count, delete, deleteAll)</li> <li>tableName (eg: VIRTUAL_SERVICES, SERVICES_ENTRIES, NF_PROFILES.)</li> </ul> |

Table 5-17 (Cont.) ocscp\_db\_operation\_failure\_total

| Field   | Details                                                                                                                                                                                                                                                                         |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_db_operation_failure_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_db_operation_failure_total{dbOperation="findAll"}</li> <li>ocscp_db_operation_failure_total{tableName="SERVICE_ENTRIES"}</li> </ul> |

Table 5-18 ocscp\_notification\_nf\_profile\_processing\_failure\_total

| Field       | Details                                                                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times notification process failure.                                                                                                                                   |
| Type        | Counter                                                                                                                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>nfType (eg., AMF)</li> <li>nfInstanceId</li> <li>ocscp_fqdn</li> </ul>                                                                   |
| Example     | ocscp_notification_nf_profile_processing_failure_total{nfType="UDM",nfInstanceId="6faf3abc-6e4a-4454-a507-a14ef8e1bc4b",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} |

Table 5-19 ocscp\_patch\_subscription\_nf\_success\_total

| Field       | Details                                                                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of successful patch operation of subscription based on nfType and nrfRegionOrSetId.                                                                                                                                                                                                     |
| Type        | Counter                                                                                                                                                                                                                                                                                        |
| Dimension   | <ul style="list-style-type: none"> <li>nfType (eg: UDM, AMF)</li> <li>nrfRegionOrSetId (eg:Reg1,Reg2)</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                           |
| Example     | <ul style="list-style-type: none"> <li>ocscp_patch_subscription_nf_success_total{nfType="A USF"</li> <li>ocscp_patch_subscription_nf_success_total{nrfRegionOrSetId="Reg1"}</li> <li>ocscp_patch_subscription_nf_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-20 ocscp\_patch\_subscription\_nf\_failure\_total

| Field       | Details                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of failure patch operation of subscription based on nfType and nrfRegionOrSetId.                                              |
| Type        | Counter                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>nfType (eg: UDM, AMF)</li> <li>nrfRegionOrSetId (eg:Reg1,Reg2)</li> <li>ocscp_fqdn</li> </ul> |

**Table 5-20 (Cont.) ocscp\_patch\_subscription\_nf\_failure\_total**

| Field   | Details                                                                                                                                                                                                                                                                                        |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_patch_subscription_nf_failure_total{nfType="AUSF"}</li> <li>ocscp_patch_subscription_nf_failure_total{nrfRegionOrSetId="Reg1"}</li> <li>ocscp_patch_subscription_nf_failure_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-21 ocscp\_unsubscription\_nf\_success\_total**

| Field       | Details                                                                                                                                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of successful operations of unsubscription based on nfType and nrfRegionOrSetId.                                                                                                                                                                                            |
| Type        | Counter                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>nfType (for example: UDM, AMF)</li> <li>nrfRegionOrSetId(eg:Reg1,Reg2)</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                       |
| Example     | <ul style="list-style-type: none"> <li>ocscp_unsubscription_nf_success_total{nfType="AUSF"}</li> <li>ocscp_unsubscription_nf_success_total{nrfRegionOrSetId="Reg1"}</li> <li>ocscp_unsubscription_nf_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-22 ocscp\_unsubscription\_nf\_failure\_total**

| Field       | Details                                                                                                                                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of failure operations of unsubscription based on nfType and nrfRegionOrSetId.                                                                                                                                                                                               |
| Type        | Counter                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>nfType (for example: UDM, AMF)</li> <li>nrfRegionOrSetId(eg:Reg1,Reg2)</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                       |
| Example     | <ul style="list-style-type: none"> <li>ocscp_unsubscription_nf_failure_total{nfType="AUSF"}</li> <li>ocscp_unsubscription_nf_failure_total{nrfRegionOrSetId="Reg1"}</li> <li>ocscp_unsubscription_nf_failure_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-23 ocscp\_subscription\_nf\_success\_total**

| Field       | Details                                                                                                                                      |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of successful operations of subscription based on nfType and nrfRegionOrSetId.                                                        |
| Type        | Counter                                                                                                                                      |
| Dimension   | <ul style="list-style-type: none"> <li>nfType (for example: UDM, AMF)</li> <li>nrfRegionOrSetId(eg:Reg1,Reg2)</li> <li>ocscp_fqdn</li> </ul> |



Table 5-23 (Cont.) ocscp\_subscription\_nf\_success\_total

| Field   | Details                                                                                                                                                                                                                                                                      |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_subscription_nf_success_total{nftype="AUSF"}</li> <li>ocscp_subscription_nf_success_total{nrfRegionOrSetId="Reg1"}</li> <li>ocscp_subscription_nf_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-24 ocscp\_subscription\_nf\_failure\_total

| Field       | Details                                                                                                                                                                                                                                                                      |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of failure operations of subscription based on nfType and nrfRegionOrSetId.                                                                                                                                                                                           |
| Type        | Counter                                                                                                                                                                                                                                                                      |
| Dimension   | <ul style="list-style-type: none"> <li>nfType (for example: UDM, AMF)</li> <li>nrfRegionOrSetId (eg: Reg1, set1.nrfset.5gc.mnc014.mcc310)</li> <li>ocscp_fqdn</li> </ul>                                                                                                     |
| Example     | <ul style="list-style-type: none"> <li>ocscp_subscription_nf_failure_total{nftype="AUSF"}</li> <li>ocscp_subscription_nf_failure_total{nrfRegionOrSetId="Reg1"}</li> <li>ocscp_subscription_nf_failure_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-25 ocscp\_audit\_2xx\_empty\_nf\_array

| Field       | Details                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The state of metrics is 1 when SCP audit receives empty NF array response for nfType. Then, state of metrics is changes to 0 when audit receives non empty NF array.                                                      |
| Type        | Gauge                                                                                                                                                                                                                     |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>nfType (eg: UDM, AMF)</li> <li>auditMethod</li> <li>nrfRegionOrSetId(eg:Reg1,Reg2)</li> </ul>                                                                  |
| Example     | ocscp_audit_2xx_empty_nf_array_rx_total{nrfRegionOrSetId="Reg2"}<br>ocscp_audit_2xx_empty_nf_array_rx_total{nftype="UDM"}<br>ocscp_audit_2xx_empty_nf_array_rx_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} |

Table 5-26 ocscp\_audit\_error\_response

| Field       | Details                                                                                                                                                                |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The state of metrics is 1 when SCP audit receives error response for nfType. Then, state of metrics is changed to 0 when audit receives non error response for nfType. |
| Type        | Gauge                                                                                                                                                                  |

**Table 5-26 (Cont.) ocscp\_audit\_error\_response**

| Field     | Details                                                                                                                                                  |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>nfType (eg: UDM, AMF)</li> <li>auditMethod</li> <li>nrfRegionOrSetId(eg:Reg1,Reg2)</li> </ul> |
| Example   | ocscp_audit_error_response{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}                                                                       |

**Table 5-27 ocscp\_subscription\_nrf\_registration\_success\_total**

| Field       | Details                                                                                                                                                                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metrics pegs the number of times registration successful for a particular nrfRegionOrSetId.                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                       |
| Dimension   | nrfRegionOrSetId<br>For example: (Reg11,Reg1,set1.nrfset.5gc.mnc014.mcc310)<br>ocscp_fqdn                                                                                                                                                     |
| Example     | <ul style="list-style-type: none"> <li>ocscp_subscription_nrf_registration_success_total{nrfRegionOrSetId="Reg11"}</li> <li>ocscp_subscription_nrf_registration_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-28 ocscp\_subscription\_nrf\_registration\_failure\_total**

| Field       | Details                                                                                                                                                                                                                                     |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metrics pegs the number of times registration failed for a particular nrfRegionOrSetId.                                                                                                                                                |
| Type        | Counter                                                                                                                                                                                                                                     |
| Dimension   | nrfRegionOrSetId<br>For example: (Reg11,Reg1,set1.nrfset.5gc.mnc014.mcc310)<br>ocscp_fqdn                                                                                                                                                   |
| Example     | <ul style="list-style-type: none"> <li>ocscp_subscription_nrf_registration_failure_total{nrfRegionOrSetId="Reg11"}</li> <li>ocscp_subscription_nrf_heartbeat_failures_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-29 ocscp\_subscription\_nrf\_heartbeat\_success\_total**

| Field       | Details                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------|
| Description | This metrics pegs the number of times heartbeat successful for a particular nrfRegionOrSetId. |
| Type        | Counter                                                                                       |
| Dimension   | nrfRegionOrSetId<br>For example: (Reg11,Reg1,set1.nrfset.5gc.mnc014.mcc310)<br>ocscp_fqdn     |

Table 5-29 (Cont.) ocscp\_subscription\_nrf\_heartbeat\_success\_total

| Field   | Details                                                                                                                                                                                                                                 |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_subscription_nrf_heartbeat_success_total{nrfRegionOrSetId="Reg11"}</li> <li>ocscp_subscription_nrf_heartbeat_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-30 ocscp\_subscription\_nrf\_heartbeat\_failures\_total

| Field       | Details                                                                                                                                                                                                                                   |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metrics pegs the number of times heartbeat failed for a particular nrfRegionOrSetId.                                                                                                                                                 |
| Type        | Counter                                                                                                                                                                                                                                   |
| Dimension   | nrfRegionOrSetId<br>For example: (Reg11,Reg1,set1.nrfset.5gc.mnc014.mcc310)<br>ocscp_fqdn                                                                                                                                                 |
| Example     | <ul style="list-style-type: none"> <li>ocscp_subscription_nrf_heartbeat_failures_total{nrfRegionOrSetId="Reg11"}</li> <li>ocscp_subscription_nrf_heartbeat_failures_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-31 ocscp\_metric\_upstream\_service\_time\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric captures the time taken by upstream host is responding the request in time buckets, for example, 1ms, 2ms, 4ms, 8ms, and so on.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Type        | Histogram                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_nf_end_point (Default value = NA)</li> <li>ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, and so on. Default value = NA)</li> <li>ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, and so on. Default value = NA)</li> <li>ocscp_upstream_service_time (for example, 1ms, 2ms, 4ms, 8ms, 16ms, 32ms, 64ms, 128ms, 256ms, 500ms, 1000ms, 2000ms, 3000ms, 5000ms, 10000ms, 15000ms, 20000ms, 30000ms, 40000ms, 50000ms, &gt;50000ms" time buckets.)</li> <li>ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>ocscp_fqdn</li> <li>ocscp_metric_upstream_service_time_total{ocscp_authn="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}</li> </ul> |

Table 5-31 (Cont.) ocscp\_metric\_upstream\_service\_time\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_upstream_service_time{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_upstream_service_time{ocscp_nf_end_point="10.96.166.65:80"}</li> <li>ocscp_metric_upstream_service_time{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_upstream_service_time{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_upstream_service_time{ocscp_upstream_service_time="1ms"}</li> <li>ocscp_metric_upstream_service_time{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_upstream_service_time_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_upstream_service_time_total{ocscp_auth="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}</li> </ul> |

Table 5-32 ocscp\_metric\_scp\_generated\_response\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Captures the error response generated by SCP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example: UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (for example: nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_response_code (for example: 503, 404, 408, etc.)</li> <li>ocscp_error_group (for example: ocscp.http.config_error.cluster_not_found, ocscp.http.routing_failure.connect_failure, etc)</li> <li>ocscp_fqdn</li> <li>ocscp_nf_end_point(nrf2svc.scpsvc.svc.cluster.local:8080)</li> <li>ocscp_producer_nf_instance_id(3faf3bbc-6e4a-2828-a507-a14ef8e1bc6a)</li> <li>ocscp_producer_host(nrf2svc.scpsvc.svc.cluster.local)</li> </ul>                                                                                                                                       |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_scp_generated_response_total{ocscp_nf_type="UDM",ocscp_nf_service_type="nudm-uecm",</li> <li>ocscp_metric_scp_generated_response_total{ocscp_response_code="503",ocscp_error_group="ocscp.http.routing_failure.connect_failure",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",ocscp_auth="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}</li> <li>ocscp_metric_scp_generated_response_total{ocscp_error_group="Destination webclient Connection Failure",ocscp_nf_end_point="nrf2l2svc.scpsvc.svc.cluster.local:8080",ocscp_producer_nf_instance_id="3faf2bbc-6e4a-2828-a507-a14ef8e1bc7b",ocscp_producer_host="nrf2l2svc.scpsvc.svc.cluster.local",ocscp_response_code="503"}</li> </ul> |

**Table 5-33 ocscp\_notification\_failure\_type\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of Notification failed to process.                                                                                                                                                                                                                                                                                            |
| Type        | Counter                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>errorType (for example: Invalid Supi Range, Invalid Identity Range, Notification Failure)</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                      |
| Example     | <ul style="list-style-type: none"> <li>ocscp_notification_failure_type_total{errorType="Invalid Identity Range"}</li> <li><b>Note:</b> errorType like Invalid Supi Range, Invalid Identity Range, Notification Failure</li> <li>ocscp_notification_failure_type_total{ocscp_fqdn="ocscpworker. scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-34 ocscp\_nrf\_notifications\_requests\_nf\_total**

| Field       | Details                                                                                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of NF profile notification requests from NRF specific to NFs per NF Type or NF profiles configured statically when TSI is set to LOCAL.                                                         |
| Type        | Counter                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>nftype (for example: UDM and AMF)</li> <li>ocscp_fqdn</li> </ul>                                                                                                              |
| Example     | <ul style="list-style-type: none"> <li>ocscp_nrf_notifications_requests_nf_total{nftype="UDM"}</li> <li>ocscp_nrf_notifications_requests_nf_total{ocscp_fqdn="ocscp-scpworker. scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-35 ocscp\_notification\_nf\_profile\_processing\_success\_total**

| Field       | Details                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of processed notifications that include the notifications from NRF, AUDIT, and Reconfiguration.                                                                                                                           |
| Type        | Counter                                                                                                                                                                                                                                        |
| Dimension   | <ul style="list-style-type: none"> <li>nftype (for example: UDM, AMF)</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                           |
| Example     | <ul style="list-style-type: none"> <li>ocscp_notification_nf_profile_processing_success_total{nftype="UDM"}</li> <li>ocscp_notification_nf_profile_processing_success_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-36 ocscp\_config\_tsi\_change\_ondemand\_audit\_invoke\_success\_total**

| Field       | Details                                                               |
|-------------|-----------------------------------------------------------------------|
| Description | Number of successful On-Demand Audit invocations when TSI is changed. |
| Type        | Counter                                                               |

**Table 5-36 (Cont.) ocscp\_config\_tsi\_change\_ondemand\_audit\_invoke\_success\_total**

| Field     | Details                                                                                                                                                                                                                                                              |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | nrfRegionOrSetId<br>For example: (Reg11,Reg1,Reg2)<br>ocscp_fqdn                                                                                                                                                                                                     |
| Example   | <ul style="list-style-type: none"> <li>ocscp_config_tsi_change_ondemand_audit_invoke_success_total{nrfRegionOrSetId="Reg11"}</li> <li>ocscp_config_tsi_change_ondemand_audit_invoke_success_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-37 ocscp\_config\_tsi\_change\_ondemand\_audit\_invoke\_failure\_total**

| Field       | Details                                                                                                                                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of failed On-Demand Audit invocations when TSI is changed.                                                                                                                                                                                                    |
| Type        | Counter                                                                                                                                                                                                                                                              |
| Dimension   | nrfRegionOrSetId<br>For example: (Reg11,Reg1,Reg2)<br>ocscp_fqdn                                                                                                                                                                                                     |
| Example     | <ul style="list-style-type: none"> <li>ocscp_config_tsi_change_ondemand_audit_invoke_failure_total{nrfRegionOrSetId="Reg11"}</li> <li>ocscp_config_tsi_change_ondemand_audit_invoke_failure_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-38 ocscp\_notification\_profile\_ignored\_total**

| Field       | Details                                                                                                                                                                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of profiles ignored by notification.                                                                                                                                                                                                            |
| Type        | Counter                                                                                                                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>notificationSource (for example, NRF, AUDIT)</li> <li>cause (for example, Duplicate Profile, Older Timestamp)</li> </ul>                                                                                        |
| Example     | <ul style="list-style-type: none"> <li>ocscp_notification_profile_ignored_total{notificationSource="NRF", cause="Duplicate Profile"}</li> <li>ocscp_notification_profile_ignored_total{notificationSource="AUDIT", cause="Older Timestamp"}</li> </ul> |

**Table 5-39 ocscp\_notification\_foreign\_nf\_locality\_absent**

| Field       | Details                                                                                                            |
|-------------|--------------------------------------------------------------------------------------------------------------------|
| Description | Sets to 1 if a foreign NF is registered from an unknown locality that is locality is not present in the foreign NF |
| Type        | Gauge                                                                                                              |

Table 5-39 (Cont.) ocscp\_notification\_foreign\_nf\_locality\_absent

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | locality (for example: UNKNOWN_LOCALITY)<br>nfInstanceId (for example: 1faf1bbc-6e4a-4454-a507-a14ef8e1bb6a)<br>nftype (for example: UDM, AMF)<br>nrregionorsetid (for example: Reg1,Reg2)<br>ocscp_fqdn                                                                                                                                                                                                                                                                                                    |
| Example   | <ul style="list-style-type: none"> <li>ocscp_notification_foreign_nf_locality_absent{locality="UNKNOWN_LOCALITY"}</li> <li>ocscp_notification_foreign_nf_locality_absent{nfInstanceId="4947a69a-f61b-4bc1-b9da-47c9c5d14b64"}</li> <li>ocscp_notification_foreign_nf_locality_absent{nftype="UDM"}</li> <li>ocscp_notification_foreign_nf_locality_absent{nrregionorsetid="Reg2"}</li> <li>ocscp_notification_foreign_nf_locality_absent{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-40 ocscp\_notification\_foreign\_nf\_locality\_unserved

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Sets to 1 if a foreign NF is registered and its locality is not served by any SCP                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Dimension   | locality (for example: Loc80)<br>nfInstanceId (for example: 1faf1bbc-6e4a-4454-a507-a14ef8e1bb6a)<br>nftype (for example: UDM, AMF)<br>nrregionorsetid (for example: Reg1, Reg2)<br>ocscp_fqdn                                                                                                                                                                                                                                                                                                             |
| Example     | <ul style="list-style-type: none"> <li>ocscp_notification_foreign_nf_locality_unserved{locality="Loc80"}</li> <li>ocscp_notification_foreign_nf_locality_unserved{nfInstanceId="4947a69a-f61b-4bc1-b9da-47c9c5d14b64"}</li> <li>ocscp_notification_foreign_nf_locality_unserved{nftype="UDM"}</li> <li>ocscp_notification_foreign_nf_locality_unserved{nrregionorsetid="Reg2"}</li> <li>ocscp_notification_foreign_nf_locality_unserved{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-41 ocscp\_notification\_duplicate\_foreign\_location

| Field       | Details                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Description | Sets to 1 if Locality of foreign NF(mate/serving locality in case of foreign SCP) is same as one of locality present in the local SCP. |
| Type        | Gauge                                                                                                                                  |

**Table 5-41 (Cont.) ocscp\_notification\_duplicate\_foreign\_location**

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | locality (for example: Loc83)<br>nflInstanceId (for example: 1faf1bbc-6e4a-4454-a507-a14ef8e1bb6a)<br>nftype (for example: UDM, AMF)<br>nrfregionorsetid (for example: Reg1, Reg2)<br>ocscp_fqdn                                                                                                                                                                                                                                                                                                   |
| Example   | <ul style="list-style-type: none"> <li>ocscp_notification_duplicate_foreign_location{locality="Loc83"}</li> <li>ocscp_notification_duplicate_foreign_location{nflInstanceId="4947a69a-f61b-4bc1-b9da-47c9c5d14b64"}</li> <li>ocscp_notification_duplicate_foreign_location{nftype="UDM"}</li> <li>ocscp_notification_duplicate_foreign_location{nrfregionorsetid="Reg2"}</li> <li>ocscp_notification_duplicate_foreign_location{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-42 ocscp\_interscp\_downstream\_rq\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Keeps track of ingress message received from another SCP                                                                                                                                                                                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                               |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn (for example: site2-ocscp-scp-worker.scpsvc.svc.cluster.local)</li> <li>ocscp_nf_service_type (for example:"nudm-uecm")</li> <li>ocscp_nf_type (for example:"UDM")</li> <li>ocscp_fqdn</li> <li>ocscp_peer_scp_fqdn (for example, "scp100svc.scpsvc.svc.cluster.local")</li> </ul>                                  |
| Example     | <ul style="list-style-type: none"> <li>ocscp_interscp_downstream_rq_total{ocscp_fqdn="site2-ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_interscp_downstream_rq_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000",ocscp_peer_scp_fqdn="scp100svc.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-43 ocscp\_metric\_rule\_engine\_processing\_time\_total**

| Field       | Details                                             |
|-------------|-----------------------------------------------------|
| Description | Captures the processing time by SCP for rule engine |
| Type        | Counter                                             |



**Table 5-43 (Cont.) ocscp\_metric\_rule\_engine\_processing\_time\_total**

| Field     | Details                                                                                                                                                                                                                                                                                                                                                           |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_locality (SCP site name for example, Loc6, Loc7, etc.)</li> <li>ocscp_processing_time (for example, 1ms, 2ms, 4ms, 8ms, etc)</li> <li>ocscp_fqdn (contains fqdn of scp)</li> </ul> |
| Example   | ocscp_metric_rule_engine_processing_time_total{ocscp_locality="Loc7"}<br>ocscp_metric_rule_engine_processing_time_total{ocscp_nf_service_type=" nudm-uecm"}<br>ocscp_metric_rule_engine_processing_time_total{ ocscp_nf_type="UDM"}<br>ocscp_metric_rule_engine_processing_time_total{ocscp_processing_time="29"}                                                 |

**Table 5-44 ocscp\_metric\_upstream\_response\_timeout\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Contains information of timeout for every attempt made by producer to get a response.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_locality (SCP site name for example, Loc6, Loc7, etc.)</li> <li>ocscp_producer_host (for example, udm1svc.default.svc.cluster.local)</li> <li>ocscp_response_code (for example, 503 SERVICE_UNAVAILABLE, 504 GATEWAY_TIMEOUT)</li> <li>ocscp_nf_setid(e.g, set1.udmset.5gc.mnc012.mcc345, default value = "UNKNOWN")</li> <li>ocscp_fqdn</li> </ul>                                                                            |
| Example     | ocscp_metric_upstream_response_timeout_total{ ocscp_nf_type="UDM"}<br>ocscp_metric_upstream_response_timeout_total{ocscp_locality="Loc7"}<br>ocscp_metric_upstream_response_timeout_total{ocscp_nf_service_type=" nudm-uecm"}<br>ocscp_metric_upstream_response_timeout_total{ocscp_processing_time="29"}<br>ocscp_metric_upstream_response_timeout_total{ocscp_response_code="504 GATEWAY_TIMEOUT"}<br>ocscp_metric_upstream_response_timeout_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}<br>ocscp_metric_upstream_response_timeout_total{ocscp_nf_setid="set1.udmset.5gc.mnc012.mcc345"} |

**Table 5-45 ocscp\_metric\_http\_streaminfo\_create\_total**

| Field       | Details                                                                                                                                                                                                                                                          |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Captures information of application, microservice, fqdn and vendor whenever StreamInfo Object is initialized.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP. |
| Type        | Counter                                                                                                                                                                                                                                                          |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                     |
| Example     | ocscp_metric_http_streaminfo_create_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}                                                                                                                                                                |

**Table 5-46 ocscp\_metric\_http\_streaminfo\_delete\_total**

| Field       | Details                                                                                                                                                                                                                                                                                         |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Captures information of application, microservice, fqdn and vendor just before StreamInfo Object is destroyed before the garbage collection.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP. |
| Type        | Counter                                                                                                                                                                                                                                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                    |
| Example     | ocscp_metric_http_streaminfo_delete_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}                                                                                                                                                                                               |

**Table 5-47 ocscp\_upstream\_rq\_pending\_overflow\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Captures total number of requests for which circuit has been broken due to http2MaxLimit reached for outstanding requests.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type( for example, UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_locality( SCP site name for example, Loc6, Loc7, etc.)</li> <li>ocscp_producer_host( for example, udm1svc.default.svc.cluster.local)</li> <li>ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_fqdn (contains fqdn of scp)</li> </ul> |

Table 5-47 (Cont.) ocscp\_upstream\_rq\_pending\_overflow\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <pre>ocscp_upstream_rq_pending_overflow_total{ ocscp_nf_type="UDM"} ocscp_upstream_rq_pending_overflow_total{ocscp_nf_service_type=" nudm-uecm"} ocscp_upstream_rq_pending_overflow_total{ocscp_locality="Loc7"} ocscp_upstream_rq_pending_overflow_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} ocscp_upstream_rq_pending_overflow_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} ocscp_upstream_rq_pending_overflow_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} ocscp_upstream_rq_pending_overflow_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</pre> |

Table 5-48 ocscp\_circuit\_breaking\_applied

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the circuit breaking state. If outstanding request limit has been reached then gauge will show 1 otherwise 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type( for example, UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_locality (SCP site name for example, Loc6, Loc7, etc.)</li> <li>ocscp_producer_host (for example, udm1svc.default.svc.cluster.local)</li> <li>ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_fqdn (contains fqdn of scp)</li> </ul> |
| Example     | <pre>ocscp_circuit_breaking_applied{ ocscp_nf_type="UDM"} ocscp_circuit_breaking_applied{ocscp_nf_service_type=" nudm-uecm"} ocscp_circuit_breaking_applied{ocscp_locality="Loc7"} ocscp_circuit_breaking_applied{ocscp_producer_host="udm1svc.default.svc.cluster.local"} ocscp_circuit_breaking_applied{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} ocscp_circuit_breaking_applied{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</pre>                                                                                                                                           |

Table 5-49 ocscp\_configuration\_tx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of times the configuration microservice receives request from users.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Dimension   | <ul style="list-style-type: none"> <li>configurationName(GatewayDetails, LogLevels, MediationTriggerPointConfig, MessagePriority, NrfDetails, ScpProfile, ServerHeader, SystemOptions, TracingOptions, AlternateNFGroup, canary_release_config_set, CircuitBreakingConfigs, IngressRateLimitConsumerInfo, EgressRateLimiter, ErrorProfileConfig, nftype_nfservice_config, IngressRateLimiter, MediationTriggerPointConfiguration, NfServiceConfig, NfServiceConfigSet, NrfConfiguration, NRF_FQDN_InstanceId_Mapping, NrfSrvConfig, oauth2, support, OciConfig, OciThresholdConfig, OcscpRoutingConfigSet, ocscp_routing_options_config, OutlierDetectionConfigs, RouteGroup, RoutingOptionsConfig, SbiMessagePriority, ScpFeaturesInfo, ScpFeatureStatus, ScpServiceConfigs, SeppInterPlmnInfo, 5gsbitrafficfeed, traffic_feed_data_director_config, traffic_feed_trigger_point_config, WorkerPodOverloadActionPolicy, WorkerPodOverloadCtrlPolicy, WorkerPodOverloadDiscardPolicy)</li> <li>requestType(GET, PUT, DELETE)</li> <li>responseCode</li> <li>ocscp_fqdn</li> </ul> |
| Example     | ocscp_configuration_tx_res_total{configurationName="SystemOptions"}<br>ocscp_configuration_tx_res_total{requestType="PUT"}<br>ocscp_configuration_tx_res_total{responseCode="200"}<br>ocscp_configuration_tx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

Table 5-50 ocscp\_rx\_configuration\_total

| Field       | Details                                                                                                                      |
|-------------|------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of times the configuration microservice responds to users either with a successful or failure response. |
| Type        | Counter                                                                                                                      |

Table 5-50 (Cont.) ocscp\_rx\_configuration\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>configurationName (GatewayDetails, LogLevels, MediationTriggerPointConfig, MessagePriority, NrfDetails, ScpProfile, ServerHeader, SystemOptions, TracingOptions, AlternateNFGroup, canary_release_config_set, CircuitBreakingConfigs, IngressRateLimitConsumerInfo, EgressRateLimiter, ErrorProfileConfig, nftype_nfservice_config, IngressRateLimiter, MediationTriggerPointConfiguration, NfServiceConfig, NfServiceConfigSet, NrfConfiguration, NRF_FQDN_InstanceId_Mapping, NrfSrvConfig, oauth2_support, OciConfig, OciThresholdConfig, OcscpRoutingConfigSet, ocscp_routing_options_config, OutlierDetectionConfigs, RouteGroup, RoutingOptionsConfig, SbiMessagePriority, ScpFeaturesInfo, ScpFeatureStatus, ScpServiceConfigs, SepplnterPlmnInfo, 5gsbitrafficfeed, traffic_feed_data_director_config, traffic_feed_trigger_point_config, WorkerPodOverloadActionPolicy, WorkerPodOverloadCtrlPolicy, WorkerPodOverloadDiscardPolicy)</li> <li>requestType(GET, PUT, DELETE)</li> <li>ocscp_fqdn</li> </ul> |
| Example   | <pre>ocscp_rx_configuration_total{configurationName="SystemOptions"} ocscp_rx_configuration_total{requestType="PUT"} ocscp_rx_configuration_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</pre>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

Table 5-51 ocscp\_notification\_all\_routing\_rules\_deleted\_total

| Field       | Details                                                                                                                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates no of times all routing rules are deleted.                                                                                                                                                                                   |
| Type        | Counter                                                                                                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>nftype (for example: UDM, AMF)</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                   |
| Example     | <ul style="list-style-type: none"> <li>ocscp_notification_all_routing_rules_deleted_total{nftype="UDM"}</li> <li>ocscp_notification_all_routing_rules_deleted_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-52 ocscp\_no\_nf\_instance

| Field       | Details                                                                                                                                                                                                                                    |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Indicates the number of NF instances available for NFType.</p> <ul style="list-style-type: none"> <li>0 indicates a single NF instance is available for nftype.</li> <li>1 indicates no NF instance is available for nftype.</li> </ul> |
| Type        | Gauge                                                                                                                                                                                                                                      |

Table 5-52 (Cont.) ocscp\_no\_nf\_instance

| Field     | Details                                                                                                                                                                        |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>• nftype (for example: UDM, AMF)</li> <li>• ocscp_fqdn</li> </ul>                                                                       |
| Example   | <ul style="list-style-type: none"> <li>• ocscp_no_nf_instance{nftype="UDM"}</li> <li>• ocscp_no_nf_instance{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-53 ocscp\_metric\_egress\_rate\_limiting\_not\_applied\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of requests routed without egress rate limiting treatment.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Dimension   | <ul style="list-style-type: none"> <li>• ocscp_nf_type</li> <li>• ocscp_nf_service_type</li> <li>• ocscp_producer_nf_instance_id</li> <li>• ocscp_producer_host</li> <li>• ocscp_cause</li> <li>• ocscp_egress_rl_bucketkey</li> <li>• ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Example     | <ul style="list-style-type: none"> <li>• ocscp_metric_egress_rate_limiting_not_applied_req_total{ocscp_nf_type="UDM"}</li> <li>• ocscp_metric_egress_rate_limiting_not_applied_req_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>• ocscp_metric_egress_rate_limiting_not_applied_req_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>• ocscp_metric_egress_rate_limiting_not_applied_req_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>• ocscp_metric_egress_rate_limiting_not_applied_req_total{ocscp_cause="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>• ocscp_metric_egress_rate_limiting_not_applied_req_total{ocscp_egress_rl_bucketkey="egress_6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>• ocscp_metric_egress_rate_limiting_not_applied_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-54 ocscp\_metric\_egress\_rate\_limiting\_alternate\_routed\_req\_total

| Field       | Details                                                              |
|-------------|----------------------------------------------------------------------|
| Description | Number of requests alternate routed because of egress rate limiting. |
| Type        | Counter                                                              |

Table 5-54 (Cont.) ocscp\_metric\_egress\_rate\_limiting\_alternate\_routed\_req\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_producer_nf_instance_id</li> <li>ocscp_producer_host</li> <li>ocscp_egress_rl_bucketkey</li> <li>ocscp_fqdn</li> <li>ocscp_consumer_host</li> <li>ocscp_consumer_nf_instance_id</li> <li>ocscp_consumer_nf_type</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Example   | <ul style="list-style-type: none"> <li>ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ ocscp_nf_type="UDM"}</li> <li>ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_nf_service_type=" nudm-uecm"}</li> <li>ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp.egress.rl.bucketkey="egress_6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_consumer_nf_type="SMF"}</li> </ul> |

Table 5-55 ocscp\_metric\_egress\_rate\_limiting\_throttle\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of requests throttled due to egress rate limiting                                                                                                                                                                                                                                                                                                                                         |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                          |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_producer_nf_instance_id</li> <li>ocscp_producer_host</li> <li>ocscp_consumer_fqdn</li> <li>ocscp_configured_egress_rate</li> <li>ocscp_egress_rl_bucketkey</li> <li>ocscp_fqdn</li> <li>ocscp_consumer_host</li> <li>ocscp_consumer_nf_instance_id</li> <li>ocscp_consumer_nf_type</li> </ul> |

Table 5-55 (Cont.) ocscp\_metric\_egress\_rate\_limiting\_throttle\_req\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>• ocscp_metric_egress_rate_limiting_throttle_req_total{ ocscp_nf_type="UDM"}</li> <li>• ocscp_metric_egress_rate_limiting_throttle_req_total{ ocscp_nf_service_type="nudm-uecm"}</li> <li>• ocscp_metric_egress_rate_limiting_throttle_req_total{ ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>• ocscp_metric_egress_rate_limiting_throttle_req_total{ ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>• ocscp_metric_egress_rate_limiting_throttle_req_total{ ocscp_egress_rl_bucketkey="egress_6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>• ocscp_metric_egress_rate_limiting_throttle_req_total{ ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>• ocscp_metric_egress_rate_limiting_throttle_req_total{ ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>• ocscp_metric_egress_rate_limiting_throttle_req_total{ ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>• ocscp_metric_egress_rate_limiting_throttle_req_total{ ocscp_consumer_nf_type="SMF"}</li> </ul> |

Table 5-56 ocscp\_metric\_ingress\_rate\_limiting\_not\_applied\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of requests routed without ingress rate limiting treatment                                                                                                                                                                                                                                                     |
| Type        | Counter                                                                                                                                                                                                                                                                                                               |
| Dimension   | <ul style="list-style-type: none"> <li>• ocscp_consumer_nf_type</li> <li>• ocscp_consumer_host</li> <li>• ocscp_consumer_nf_instance_id</li> <li>• ocscp_ingress_rl_headername</li> <li>• ocscp_ingress_rl_headerformat</li> <li>• ocscp_cause</li> <li>• ocscp_ingress_rl_bucketkey</li> <li>• ocscp_fqdn</li> </ul> |



Table 5-56 (Cont.) ocscp\_metric\_ingress\_rate\_limiting\_not\_applied\_req\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_ingress_rl_headername="User-Agent"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_ingress_rl_headerformat="NFTYPE-FQDN NFINSTANCEID"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_cause="CONFIGURATION_NOT_FOUND"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp.ingress.rl.bucketkey="ingress_6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{app="ocscp-scp-worker",app_kubernetes_io_component="microService",app_kubernetes_io_instance="ocscp",app_kubernetes_io_managed_by="Helm",app_kubernetes_io_name="scp-worker",app_kubernetes_io_part_of="ocscp",app_kubernetes_io_version="22.4.0.0",application_name="ocscp",coherenceCluster="scp-coherence-cluster",exported_vendor="Oracle",helm_sh_chart="scp-worker-22.4.0",instance="192.168.141.38:8091",job="kubernetes-pods",kubernetes_namespace="scpsvc",kubernetes_pod_name="ocscp-scp-worker-5897bd5b76-wvbm",microservice="scp-worker",ocscp_cause="CONFIGURATION_NOT_FOUND",ocscp_consumer_fqdn="NA",ocscp_consumer_nf_instance_id="NA",ocscp_consumer_nf_type="NA",ocscp_ingress_rl_bucketkey="NA",ocscp_ingress_rl_headerformat="NFTYPE-FQDN NFINSTANCEID",ocscp_ingress_rl_headername="User-Agent",pod_template_hash="5897bd5b76",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="oracle"}</li> </ul> |

Table 5-57 ocscp\_metric\_ingress\_rate\_limiting\_throttle\_req\_total

| Field       | Details                                                   |
|-------------|-----------------------------------------------------------|
| Description | Number of requests throttled due to ingress rate limiting |
| Type        | Counter                                                   |

Table 5-57 (Cont.) ocscp\_metric\_ingress\_rate\_limiting\_throttle\_req\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                        |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"><li>• ocscp_consumer_nf_type</li><li>• ocscp_consumer_nf_instance_id</li><li>• ocscp_consumer_host</li><li>• ocscp_configured_ingress_rate</li><li>• ocscp_ingress_rl_bucketkey</li><li>• ocscp_fqdn</li><li>• ocscp_ingress_rl_headername</li><li>• ocscp_ingress_rl_headerformat</li></ul> |

Table 5-57 (Cont.) ocscp\_metric\_ingress\_rate\_limiting\_throttle\_req\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_ingress_rl_headername="User-Agent"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_ingress_rl_headerformat="NFTYPE-FQDN-NFINSTANCEID"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_configured_ingress_rate="40 messages per 1 seconds with Burst of 100 %"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp.ingress.rl.bucketkey="ingress_6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_ingress_rate_limiting_throttle_req_total{app="ocscp-scp-worker",app_kubernetes_io_component="microService",app_kubernetes_io_instance="ocscp",app_kubernetes_io_managed_by="Helm",app_kubernetes_io_name="ocscp-scp-worker",app_kubernetes_io_part_of="ocscp",app_kubernetes_io_version="22.4.0.0",application_name="ocscp",coherenceCluster="scp-coherence-cluster",exported_vendor="Oracle",helm_sh_chart="scp-worker-22.4.0",instance="192.168.141.38:8091",job="kubernetes-pods",kubernetes_namespace="scpsvc",kubernetes_pod_name="ocscp-scp-worker-5897bd5b76-wvbm",microservice="scp-worker",ocscp_configured_ingress_rate="40 messages per 1 seconds with Burst of 100 %",ocscp_consumer_fqdn="smf1svc.scpsvc.svc.cluster.local",ocscp_consumer_nf_instance_id="2faf1bbc-6e4a-4454-acd7-a14ef8efbc6b",ocscp_consumer_nf_type="SMF",ocscp_ingress_rl_bucketkey="ingress_2faf1bbc-6e4a-4454-acd7-a14ef8efbc6b",ocscp_ingress_rl_headerformat="NFTYPE-FQDN",ocscp_ingress_rl_headername="User-Agent",pod_template_hash="5897bd5b76",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="oracle"}</li> </ul> |

**Table 5-58 ocscp\_notification\_received\_different\_nrfregionorsetid\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of duplicate notifications skipped with the nrfRegionOrSetId update                                                                                                                                                                                                                                                                                                                                        |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                           |
| Dimension   | <ul style="list-style-type: none"> <li>• nfType</li> <li>• nflInstanceId</li> <li>• nrfRegionOrSetId</li> <li>• ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                                             |
| Example     | ocscp_notification_received_different_nrfregionorsetid_total{nfType="UDM"}<br>ocscp_notification_received_different_nrfregionorsetid_total{nflInstanceId="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}<br>ocscp_notification_received_different_nrfregionorsetid_total{nrfRegionOrSetId="Reg1"}<br>ocscp_notification_received_different_nrfregionorsetid_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} |

**Table 5-59 ocscp\_audit\_2xx\_empty\_nf\_array\_rx\_total**

| Field       | Details                                                                                                                                                                                                                      |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of 2xx responses with empty body                                                                                                                                                                                      |
| Type        | Counter                                                                                                                                                                                                                      |
| Dimension   | <ul style="list-style-type: none"> <li>• nrfRegionOrSetId</li> <li>• nfType</li> <li>• ocscp_fqdn</li> </ul>                                                                                                                 |
| Example     | ocscp_audit_2xx_empty_nf_array_rx_total{nrfRegionOrSetId="Reg2"}<br>ocscp_audit_2xx_empty_nf_array_rx_total{nfType="UDM"}<br>ocscp_audit_2xx_empty_nf_array_rx_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} |

**Table 5-60 ocscp\_audit\_nrf\_failure\_response\_rx\_total**

| Field       | Details                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of failed responses received from NRF for SCP audit                                                                                                                                                                          |
| Type        | Counter                                                                                                                                                                                                                             |
| Dimension   | <ul style="list-style-type: none"> <li>• nrfRegionOrSetId</li> <li>• nfType</li> <li>• ocscp_fqdn</li> </ul>                                                                                                                        |
| Example     | ocscp_audit_nrf_failure_response_rx_total{nrfRegionOrSetId="Reg1"}<br>ocscp_audit_nrf_failure_response_rx_total{nfType="AUSF"}<br>ocscp_audit_nrf_failure_response_rx_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} |

**Table 5-61 ocscp\_notification\_request\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Pegs the number of notifications received on the notification module, which includes notifications from sources NRF, AUDIT, and RECONFIGURATION, except for the NF profile notification with invalid JSON.                                                                                                                                                                                                                                                                               |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Dimension   | <ul style="list-style-type: none"> <li>• eventType</li> <li>• nfStatus</li> <li>• nfType</li> <li>• nfInstanceId</li> <li>• notificationSource</li> <li>• nrfRegionOrSetId</li> <li>• ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                                              |
| Example     | <pre>ocscp_notification_request_total {eventType="NF_REGISTERED"} ocscp_notification_request_total {nfStatus="REGISTERED"} ocscp_notification_request_total {nfType="UDM"} ocscp_notification_request_total {nfInstanceId="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} ocscp_notification_request_total {notificationSource="NRF"} ocscp_notification_request_total {nrfRegionOrSetId="Reg1"} ocscp_notification_request_total{ocscp_fqdn="ocscp-scp- worker.scpsvc.svc.cluster.local"}</pre> |

**Table 5-62 ocscp\_audit\_tx\_req\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric pegs the number of times audit requests are initiated for particular NFType, nrfRegionOrSetId, and nrfHost by the scpc-Audit service. This metric is pegged for the scheduled Audit cycle.                                                                                                                                         |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                        |
| Dimension   | <ul style="list-style-type: none"> <li>• auditType</li> <li>• nrfHost</li> <li>• nfType</li> <li>• auditMode</li> <li>• nrfRegionOrSetId</li> <li>• ocscp_fqdn</li> </ul>                                                                                                                                                                      |
| Example     | <pre>ocscp_audit_tx_req_total{auditType="onDemand"} ocscp_audit_tx_req_total{nrfHost="nrf.svc.cluster.local"} ocscp_audit_tx_req_total{nfType="AMF"} ocscp_audit_tx_req_total{auditMode="nnrf-disc"} ocscp_audit_tx_req_total{nrfRegionOrSetId="Reg1"} ocscp_audit_tx_req_total{ocscp_fqdn="ocscp-scp- worker.scpsvc.svc.cluster.local"}</pre> |

Table 5-63 ocscp\_audit\_rx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric pegs the number of times a response has been received for an initiated audit request. This metric is pegged for the scheduled Audit cycle.                                                                                                                                                                                                                                                                                                 |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>• auditType</li> <li>• nrfHost</li> <li>• nfType</li> <li>• auditMode</li> <li>• nrfRegionOrSetId</li> <li>• responseCodeClass</li> <li>• responseCode</li> <li>• ocscp_fqdn</li> </ul>                                                                                                                                                                                                                         |
| Example     | ocscp_audit_rx_res_total{auditType="onDemand"}<br>ocscp_audit_rx_res_total{nrfHost="nrf.svc.cluster.local"}<br>ocscp_audit_rx_res_total{nfType="AMF"}<br>ocscp_audit_rx_res_total{auditMode="nnrf-disc"}<br>ocscp_audit_rx_res_total{nrfRegionOrSetId="Reg1"}<br>ocscp_audit_rx_res_total{responseCodeClass="2xx"}<br>ocscp_audit_rx_res_total{responseCode="201"}<br>ocscp_audit_rx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} |

Table 5-64 ocscp\_metric\_interscp\_http\_tx\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Number of HTTP requests forwarded to the next hop SCP</p> <p>Here, the dimension ocscp_producer_nf_instance_id indicates the ninstanceid of nexthopscp, and the dimension ocscp_producer_service_instance_id indicates the service instance ID of nexthopscp.</p> <p>The ocscp_nf_service_type dimension for notification is "n&lt;nfType&gt;-unknown or NA-unknown".</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

Table 5-64 (Cont.) ocscp\_metric\_interscp\_http\_tx\_req\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <p><b>Non OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>• ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>• ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>• ocscp_scp_end_point (Default value = NA, scp51svc.default.svc.cluster.local:8080)</li> <li>• ocscp_locality (SCP own locality e.g., Loc6, Loc7, etc.)</li> <li>• ocscp_producer_nf_instance_id (e.g., 2fbf1bbc-6e4b-3994-b507-b14ef8e1bc51, etc. Default value = NA)</li> <li>• ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>• ocscp_producer_nf_fqdn(default value = NA, Contains fqdn of NF pcf1svc.default.svc.cluster.local )</li> <li>• ocscp_nf_setid( default value = "UNKNOWN")</li> <li>• ocscp_nexthop_ocscp_fqdn(contains fqdn of other scp scp51svc.default.svc.cluster.local)</li> <li>• ocscp_fqdn(contains fqdn of scp ocscp-scp-worker.scpsvc.svc.cluster.local)</li> </ul> <p><b>Non OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>• NFSERVICETYPE</li> <li>• SCPENDPOINT</li> <li>• NfId</li> <li>• PRODUCERNFFQDN</li> <li>• NEXTHOPSCPFQDN</li> <li>• NFSETID</li> <li>• SCPAUTHORITY</li> </ul> |
| Example   | <ul style="list-style-type: none"> <li>• ocscp_metric_interscp_http_tx_req_total{ocscp_nf_type="PCF"}</li> <li>• ocscp_metric_interscp_http_tx_req_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>• ocscp_metric_interscp_http_tx_req_total{ocscp_scp_end_point="10.96.166.65:80"}</li> <li>• ocscp_metric_interscp_http_tx_req_total{ocscp_locality="Loc7"}</li> <li>• ocscp_metric_interscp_http_tx_req_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>• ocscp_metric_interscp_http_tx_req_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>• ocscp_metric_interscp_http_tx_req_total{ocscp_producer_nf_fqdn="pcf1svc.default.svc.cluster.local"}</li> <li>• ocscp_metric_interscp_http_tx_req_total{ocscp_nexthop_ocscp_fqdn="scp51svc.default.svc.cluster.local"}</li> <li>• ocscp_metric_interscp_http_tx_req_total{ocscp_fqdn="scp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul>                                                                                                                                                                                                                      |

Table 5-65 ocscp\_metric\_interscp\_http\_rx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Number of HTTP responses received from SCP with specific HTTP response codes, for example, 201, 503, and so on. Here, the dimension ocscp_producer_nf_instance_id indicates the ninstanceid of the nexthopscp, and the dimension ocscp_producer_service_instance_id indicates the service instance ID of the nexthopscp.</p> <p>The ocscp_nf_service_type dimension for notification is "n&lt;nfType&gt;-unknown or NA-unknown".</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Dimension   | <p><b>Non OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>ocscp_response_code (e.g., 201, 503, 404, etc.)</li> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, npcf-smpolicycontrol etc.)</li> <li>ocscp_scp_end_point (Default value = NA, scp52svc.default.svc.cluster.local:8080)</li> <li>ocscp_locality (SCP own locality e.g., Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_res_msg_size (The response message size buckets. e.g., 1 (size &lt; 1k bytes), 2 (1k &lt; size &lt; 2k bytes), 4 (2k &lt; size &lt; 4k ), etc.)</li> <li>ocscp_response_code_class (e.g., 2, 5, etc.)</li> <li>ocscp_producer_nf_fqdn (default value = NA, Contains fqdn of NF pcf1svc.default.svc.cluster.local )</li> <li>ocscp_nf_setid(default value ="UNKNOWN")</li> <li>ocscp_nexthop_ocscp_fqdn(contains fqdn of other scp scp51svc.default.svc.cluster.local)</li> <li>ocscp_fqdn(contains fqdn of scp)</li> </ul> <p><b>OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>NFSERVICETYPE</li> <li>SCPENDPOINT</li> <li>Nfid</li> <li>RESPONSECODE</li> <li>RESPONSEMSGSIZE</li> <li>PRODUCERNFFQDN</li> <li>NEXTHOPSCPFQDN</li> <li>NFSETID</li> <li>SCPAUTHORITY</li> </ul> |



Table 5-65 (Cont.) ocscp\_metric\_interscp\_http\_rx\_res\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_response_code="201"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_nf_type="PCF"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_scp_end_point="scp52svc.default.svc.cluster.local:8080"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_res_msg_size="2"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_response_code_class="2"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_producer_nf_fqdn="pcf1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_nexthop_ocscp_fqdn="scp51svc.default.svc.cluster.local"}</li> <li>ocscp_metric_interscp_http_rx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-66 ocscp\_metric\_jetty\_client\_requests\_total

| Field       | Details                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of HTTP requests sent to producer NFs by the Jetty client.                                                                                                                                                         |
| Type        | Counter                                                                                                                                                                                                                   |
| Dimension   | <ul style="list-style-type: none"> <li>eventtype(eg., onQueued, onBegin, onHeaders, onCommit, onContent, onSuccess, onFailure)</li> <li>ocscp_fqdn(contains fqdn of scp)</li> </ul>                                       |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_jetty_client_requests_total(eventtype="onBegin")</li> <li>ocscp_metric_jetty_client_requests_total(ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local")</li> </ul> |

Table 5-67 ocscp\_worker\_pod\_overload\_discard\_req\_total

| Field       | Details                                                                                                                                                                    |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of requests discarded with error responses through overload control treatment of SCP-worker service when CPU utilization or Pending Transactions exceeds threshold. |
| Type        | Counter                                                                                                                                                                    |

Table 5-67 (Cont.) ocscp\_worker\_pod\_overload\_discard\_req\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>Consumer NF type</li> <li>Consumer NF instance</li> <li>Producer NF FQDN (if available)</li> <li>CPU threshold level (Minor/Major/Critical)</li> <li>HTTP method</li> <li>SMP priority</li> <li>ocscp_fqdn</li> <li>ocscp_consumer_host</li> <li>ocscp_consumer_nf_instance_id</li> <li>ocscp_consumer_nf_type</li> <li>ocscp_consumer_nf_unique_id</li> </ul>                                                                                                                                  |
| Example   | <ul style="list-style-type: none"> <li>ocscp_metric_overload_discard_with_error_res_total{cpu_level="MINOR"}</li> <li>ocscp_metric_overload_discard_with_error_res_total{http_method="PATCH"}</li> <li>ocscp_metric_overload_discard_with_error_res_total{ocscp_producer_host="pcf1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_overload_discard_with_error_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_overload_discard_with_error_res_total{sbimessage_priority="19"}</li> </ul> |

Table 5-68 ocscp\_alternate\_resolution\_dnssrv\_req\_total

| Field       | Details                                                                                                                                                                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the total number of requests sent to DNS SRV.                                                                                                                                                                                                       |
| Type        | Counter                                                                                                                                                                                                                                                       |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>service_proto_name</li> </ul>                                                                                                                                                                      |
| Example     | <ul style="list-style-type: none"> <li>ocscp_alternate_resolution_dnssrv_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_alternate_resolution_dnssrv_req_total{service_proto_name="_http._tcp.nf2stub.scpsvc.sv"}</li> </ul> |

Table 5-69 ocscp\_alternate\_resolution\_dnssrv\_res\_total

| Field       | Details                                                                                                                                                                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the total number of DNS SRV queries received from the DNS server.                                                                                                                                                                      |
| Type        | Counter                                                                                                                                                                                                                                          |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>service_proto_name</li> <li>status(success/failure)</li> <li>cause(timed_out, host_not_found, network_error, referral, name_too_long, na, error_at_scp, unknown, servfail)</li> </ul> |

Table 5-69 (Cont.) ocscp\_alternate\_resolution\_dnssrv\_res\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_alternate_resolution_dnssrv_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_alternate_resolution_dnssrv_res_total{service_protocol_name="_http._tcp.nf2stub.scpsvc.sv"}</li> <li>ocscp_alternate_resolution_dnssrv_res_total{status="success"}</li> <li>ocscp_alternate_resolution_dnssrv_res_total{cause="timed_out", "host_not_found", "network_error", "referral", "name_too_long", "na", "error_at_scp", "unknown", "servfail"}</li> </ul> |

Table 5-70 ocscp\_metric\_http\_ar\_tx\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Indicates the total number of alternate route attempts made by SCP.</p> <p><b>Note:</b> Here, the instanceid of SEPP is used for interplmn scenarios, the instanceid of SCP is used for inter-scp scenarios, otherwise, the instanceid of the producer is utilized.</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p>                                                                                                                                                                                                                                                                                                                                                                                                                |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_primary_producer_fqdn</li> <li>ocscp_primary_nf_end_point</li> <li>ocscp_alternate_producer_host</li> <li>ocscp_alternate_nf_end_point</li> <li>ocscp_locality</li> <li>ocscp_alternate_producer_nf_instance_id</li> <li>ocscp_alternate_producer_service_instance_id</li> <li>ocscp_nf_setid</li> <li>ocscp_alternate_route_type</li> <li>alternate_route_cause</li> </ul> <p><b>Note:</b> In the notification message type, certain dimension values such as ocscp_nf_service_type, ocscp_nf_setid, and ocscp_nf_type may not qualify for pegging. In the scenario where the service name cannot be derived from the PATH URI, pegging will not take place, and if these dimensions are identified through headers, pegging will occur.</p> |

Table 5-70 (Cont.) ocscp\_metric\_http\_ar\_tx\_req\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_http_ar_tx_req_total{ocscp_alternate_route_type="DNS_SRV"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_alternate_route_type="STATIC_CONFIG"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_nf_type="PCF"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_alternate_nf_end_point="pcf2svc.default.svc.cluster.local:8080"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_primary_producer_fqdn="pcf1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_alternate_producer_host="pcf2svc.default.svc.cluster.local"}</li> <li>ocscp_metric_http_ar_tx_req_total{ocscp_nf_setid="Loc7"}</li> </ul> |

Table 5-71 ocscp\_metric\_sidecarproxy\_failures\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of error responses received from service mesh sidecar proxy because of transport error towards producer NFs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>ocscp_fqdn</li> <li>response_code</li> <li>ocscp_server_header</li> </ul> |

Table 5-71 (Cont.) ocscp\_metric\_sidecarproxy\_failures\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_sidecarproxy_failures_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_sidecarproxy_failures_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_sidecarproxy_failures_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_sidecarproxy_failures_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_sidecarproxy_failures_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_sidecarproxy_failures_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_sidecarproxy_failures_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_sidecarproxy_failures_total{ocscp_response_code="503"}</li> <li>ocscp_metric_sidecarproxy_failures_total{ocscp_server_header="envoy"}</li> </ul> |

Table 5-72 ocscp\_metric\_remote\_response\_without\_server\_header\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times SCP adds the server header in the error response received from producer NFs without server header.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>ocscp_fqdn</li> </ul> |

Table 5-72 (Cont.) ocscp\_metric\_remote\_response\_without\_server\_header\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_remote_response_without_server_header_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_remote_response_without_server_header_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_remote_response_without_server_header_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_remote_response_without_server_header_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_remote_response_without_server_header_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_remote_response_without_server_header_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_remote_response_without_server_header_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-73 ocscp\_metric\_add\_or\_update\_server\_header\_custom\_behavior\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times SCP adds or updates the server header in the error response received from producer NFs.                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>ocscp_fqdn</li> </ul> |

Table 5-73 (Cont.) ocscp\_metric\_add\_or\_update\_server\_header\_custom\_behavior\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-74 ocscp\_metric\_add\_or\_update\_server\_header\_custom\_behavior\_v2\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Number of times SCP adds or updates the server header for the enhancement V2 behavior in the following scenarios:</p> <ul style="list-style-type: none"> <li>In all the error scenarios when SCP attempts on multiple producer NFs or alternate routes.</li> <li>SCP attempts on a single producer NF and observed a connection error/timeout, error/unknown, error/received an error response without the server header.</li> </ul>                                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on)</li> <li>ocscp_locality (SCP site name, for example, Loc6, Loc7, and so on)</li> <li>ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c. Default value = NA)</li> <li>ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02. Default value = NA)</li> <li>ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>ocscp_fqdn</li> </ul> |

Table 5-74 (Cont.) ocscp\_metric\_add\_or\_update\_server\_header\_custom\_behavior\_v2\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_v2_total(ocscp_producer_host="udm1svc.default.svc.cluster.local")</li> <li>ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-75 ocscp\_metric\_add\_server\_header\_default\_behavior\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times SCP adds the server header in the error response received from producer NFs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>ocscp_fqdn</li> </ul> |



Table 5-75 (Cont.) ocscp\_metric\_add\_server\_header\_default\_behavior\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_add_server_header_default_behavior_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_add_server_header_default_behavior_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_add_server_header_default_behavior_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_add_server_header_default_behavior_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</li> <li>ocscp_metric_add_server_header_default_behavior_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> <li>ocscp_metric_add_server_header_default_behavior_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_add_server_header_default_behavior_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-76 ocscp\_metric\_failure\_from\_peer\_scp\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times SCP receives error responses with server header containing only the next hop FQDN of SCP.                                                                                                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_peer_scp_fqdn (default value = NA, Contains fqdn of producer)</li> <li>ocscp_fqdn</li> </ul>                                                                                                                               |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_failure_from_peer_scp_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_failure_from_peer_scp_total{ocscp_peer_scp_fqdn="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_metric_failure_from_peer_scp_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-77 ocscp\_peer\_scp\_unhealthy

| Field       | Details                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times (as gauge) the peer SCP is marked as unavailable.                                                                                                                                        |
| Type        | Gauge                                                                                                                                                                                                    |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_peer_scp_fqdn (default value = NA, Contains fqdn of producer)</li> <li>ocscp_fqdn</li> </ul> |

Table 5-77 (Cont.) ocscp\_peer\_scp\_unhealthy

| Field   | Details                                                                                                                                                                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_peer_scp_unhealthy{ocscp_locality="Loc7"}</li> <li>ocscp_peer_scp_unhealthy(ocscp_peer_scp_fqdn="udm1svc.default.svc.cluster.local")</li> <li>ocscp_peer_scp_unhealthy{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-78 ocscp\_alternate\_resolution\_dnssrv\_rx\_error\_res

| Field       | Details                                                                                                                                                                                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates failed DNS SRV query responses.                                                                                                                                                                                                                                                                                                          |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>cause (network_error, servfail, timed_out)</li> <li>ocscp_fqdn (ocscp-scp-worker.scpsvc.svc.cluster.local)</li> </ul>                                                                                                                                                                                       |
| Example     | <ul style="list-style-type: none"> <li>ocscp_alternate_resolution_dnssrv_rx_error_res {cause="timed_out", "host_not_found", "network_error", "referral", "name_too_long", "na", "error_at_scp", "unknown", "servfail"}</li> <li>ocscp_alternate_resolution_dnssrv_rx_error_res {ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-79 ocscp\_load\_manager\_peer\_load\_throttled\_threshold

| Field       | Details                                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates that the peer load has exceeded the Throttled threshold. This metric is pegged by the load manager pod.                                                                                                                                                                     |
| Type        | Gauge                                                                                                                                                                                                                                                                                 |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_peer_fqdn</li> <li>ocscp_peer_nf_instance_id</li> <li>ocscp_peer_service_instance_id</li> <li>ocscp_peer_service_name</li> </ul>                                                                                                         |
| Example     | ocscp_load_manager_peer_load_throttled_threshold{ocscp_peer_fqdn="smf1svc.scpsvc.svc.cluster.local",ocscp_peer_nf_instance_id="11111112-aaaa-aaaa-aaaa-111111111111",ocscp_peer_service_instance_id="3aad8c63-0cc0-4b74-9582-4e6475214ae8",ocscp_peer_service_name="nsmf-pdusession"} |

Table 5-80 ocscp\_load\_manager\_peer\_load\_alternateRoute\_threshold

| Field       | Details                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates that the peer load has exceeded the Alternate Route state threshold. This metric is pegged by the load manager pod. |
| Type        | Gauge                                                                                                                         |

Table 5-80 (Cont.) ocscp\_load\_manager\_peer\_load\_alternateRoute\_threshold

| Field     | Details                                                                                                                                                                                                                                                                                    |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_peer_fqdn</li> <li>ocscp_peer_nf_instance_id</li> <li>ocscp_peer_service_instance_id</li> <li>ocscp_peer_service_name</li> </ul>                                                                                                              |
| Example   | ocscp_load_manager_peer_load_alternateRoute_threshold{ocscp_peer_fqdn="smf1svc.scpsvc.svc.cluster.local",ocscp_peer_nf_instance_id="11111112-aaaa-aaaa-aaaa-111111111111",ocscp_peer_service_instance_id="3aad8c63-0cc0-4b74-9582-4e6475214ae8",ocscp_peer_service_name="nsmf-pdusession"} |

Table 5-81 ocscp\_metric\_ondemand\_discovery\_tx\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times SCP worker sends on-demand discovery request to nrfproxy.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_fqdn</li> <li>subscriber_info_present_in_discovery_headers<br/>(If any of the following discovery headers is present in the request: 3gpp-sbi-discovery-supi, 3gpp-sbi-discovery-gpsi, 3gpp-sbi-discovery-external-group-identity, 3gpp-sbi-discovery-routing-indicator, 3gpp-sbi-discovery-msisdn, 3gpp-sbi-discovery-imsi)</li> </ul> |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_ondemand_discovery_tx_req_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_ondemand_discovery_tx_req_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_ondemand_discovery_tx_req_total{ocscp_requester_nf_type="UDM"}</li> </ul>                                                                                                                                                                                                                                                                     |

Table 5-82 ocscp\_metric\_ondemand\_discovery\_rx\_res\_total

| Field       | Details                                                                         |
|-------------|---------------------------------------------------------------------------------|
| Description | Number of times SCP worker receives on-demand discovery response from nrfproxy. |
| Type        | Counter                                                                         |

Table 5-82 (Cont.) ocscp\_metric\_ondemand\_discovery\_rx\_res\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_fqdn</li> <li>ocscp_response_code</li> <li>ocscp_response_code_class</li> <li>subscriber_info_present_in_discovery_headers</li> </ul>                                                                                                          |
| Example   | <ul style="list-style-type: none"> <li>ocscp_metric_ondemand_discovery_rx_res_to tal{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_ondemand_discovery_rx_res_to tal{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_ondemand_discovery_rx_res_to tal{ocscp_requester_nf_type="AMF"}</li> <li>ocscp_metric_ondemand_discovery_rx_res_to tal{ocscp_response_code="201"}</li> <li>ocscp_metric_ondemand_discovery_rx_res_to tal{ocscp_response_code_class="2"}</li> </ul> |

Table 5-83 ocscp\_metric\_ondemand\_discovery\_cache\_match\_total

| Field       | Details                                                                                                                                                                                                                                                                                                            |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times SCP worker is able to resolve discovery requests using local cache.                                                                                                                                                                                                                                |
| Type        | Counter                                                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_consumer_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_fqdn</li> <li>subscriber_info_present_in_discovery_headers</li> </ul>                 |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_ondemand_discovery_cache_match_tota l{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_ondemand_discovery_cache_match_tota l{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_ondemand_discovery_cache_match_tota l{ocscp_consumer_nf_type="AMF"}</li> </ul> |

Table 5-84 ocscp\_nrf\_nf\_discovery\_tx\_req\_total

| Field       | Details                                                         |
|-------------|-----------------------------------------------------------------|
| Description | The total number of discovery requests sent to NRF by nrfproxy. |
| Type        | Counter                                                         |

Table 5-84 (Cont.) ocscp\_nrf\_nf\_discovery\_tx\_req\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_fqdn</li> <li>subscriber_info_present (If any of the following discovery headers present in the request: 3gpp-sbi-discovery-supi, 3gpp-sbi-discovery-gpsi, 3gpp-sbi-discovery-external-group-identity, 3gpp-sbi-discovery-routing-indicator, 3gpp-sbi-discovery-msisd, 3gpp-sbi-discovery-imsi)</li> <li>is_inter_plmn (e.g.: true for inter plmn; false for intra plmn)</li> </ul> |
| Example   | <ul style="list-style-type: none"> <li>ocscp_nrf_nf_discovery_tx_req_total{ocscp_producer_nf_type="UDM"}</li> <li>ocscp_nrf_nf_discovery_tx_req_total{ocscp_requester_nf_type="AMF"}</li> <li>ocscp_nrf_nf_discovery_tx_req_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_nrf_nf_discovery_tx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul>                                                                                                                                                                                                                                       |

Table 5-85 ocscp\_nrf\_nf\_discovery\_rx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of discovery responses received from NRF by nrfproxy.                                                                                                                                                                                                                                                                                                                                                                               |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_fqdn</li> <li>subscriber_info_present</li> <li>is_inter_plmn</li> <li>status_code</li> </ul>                                                                                                                  |
| Example     | <ul style="list-style-type: none"> <li>ocscp_nrf_nf_discovery_rx_res_total{ocscp_producer_nf_type="UDM"}</li> <li>ocscp_nrf_nf_discovery_rx_res_total{ocscp_requester_nf_type="AMF"}</li> <li>ocscp_nrf_nf_discovery_rx_res_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_nrf_nf_discovery_rx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_nrf_nf_discovery_rx_res_total{status_code="200"}</li> </ul> |

**Table 5-86 ocscp\_nrf\_nf\_discovery\_rx\_req\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of discovery requests received by nrfproxy from SCP worker.                                                                                                                                                                                                                                                                                                         |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_fqdn</li> <li>subscriber_info_present</li> <li>is_inter_plmn</li> </ul>                                                                       |
| Example     | <ul style="list-style-type: none"> <li>ocscp_nrf_nf_discovery_rx_req_total{ocscp_producer_nf_type="UDM"}</li> <li>ocscp_nrf_nf_discovery_rx_req_total{ocscp_requester_nf_type="AMF"}</li> <li>ocscp_nrf_nf_discovery_rx_req_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_nrf_nf_discovery_rx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-87 ocscp\_nrf\_nf\_discovery\_tx\_res\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of discovery responses sent by nrfproxy to SCP worker.                                                                                                                                                                                                                                                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_fqdn</li> <li>subscriber_info_present</li> <li>is_inter_plmn</li> <li>status_code</li> <li>is_from_local_cache (Whether the discovery process was made from local cache (true) or NRF (false))</li> </ul>     |
| Example     | <ul style="list-style-type: none"> <li>ocscp_nrf_nf_discovery_tx_res_total{ocscp_producer_nf_type="UDM"}</li> <li>ocscp_nrf_nf_discovery_tx_res_total{ocscp_requester_nf_type="AMF"}</li> <li>ocscp_nrf_nf_discovery_tx_res_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_nrf_nf_discovery_tx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_nrf_nf_discovery_tx_res_total{status_code="200"}</li> </ul> |

Table 5-88 ocscp\_nrfproxy\_generated\_error\_response\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of error responses generated by nrfproxy excluding NRF returned errors.                                                                                                                                                                                                                                                                                                                                                                                                               |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_fqdn</li> <li>subscriber_info_present</li> <li>is_inter_plmn</li> <li>status_code</li> <li>valid_NRF_response_to_fail (Whether SCP convert 200 OK (NRF) to 400 error, due to empty profile list or not)</li> </ul>                                              |
| Example     | <ul style="list-style-type: none"> <li>ocscp_nrfproxy_generated_error_response_total{ocscp_producer_nf_type="UDM"}</li> <li>ocscp_nrfproxy_generated_error_response_total{ocscp_requester_nf_type="AMF"}</li> <li>ocscp_nrfproxy_generated_error_response_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_nrfproxy_generated_error_response_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_nrfproxy_generated_error_response_total{status_code="200"}</li> </ul> |

Table 5-89 ocscp\_metric\_sepp\_http\_rx\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of HTTP requests routed towards SEPP.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_nf_end_point (Default value = NA)ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer)</li> <li>plmn_id(mnc123-mcc254)</li> <li>ocscp_authority</li> </ul> |

Table 5-89 (Cont.) ocscp\_metric\_sepp\_http\_rx\_req\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                            |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_sepp_http_tx_req_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_sepp_http_tx_req_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_sepp_http_tx_req_total{ocscp_sepp_fqdn="sepp1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_sepp_http_tx_req_total{plmn_id="mnc123-mcc100"}</li> </ul> |

Table 5-90 ocscp\_metric\_sepp\_http\_rx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>The total number of HTTP responses received from SEPP. The ocscp_nf_service_type dimension for notification is "n&lt;nfType&gt;-unknown or NA-unknown".</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Dimension   | <p><b>Non OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>ocscp_response_code (e.g., 201, 503, 404, etc.)</li> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_nf_end_point (Default value = NA)</li> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_res_msg_size (The response message size buckets. e.g., 1 (size &lt; 1k bytes), 2 (1k &lt; size &lt; 2k bytes), 4 (2k &lt; size &lt; 4k), etc.)</li> <li>ocscp_response_code_class (e.g., 2, 5, etc.)</li> <li>ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer)</li> <li>plmn_id(mnc123-mcc254)</li> <li>ocscp_authority</li> </ul> <p><b>OCI Dimensions</b></p> <ul style="list-style-type: none"> <li>NFSERVICETYPE</li> <li>NFENDPOINT</li> <li>NFINSTANCEID</li> <li>SERVICEINSTANCEID</li> <li>RESPONSECODE</li> <li>RESPONSEMSGSIZE</li> <li>SEPP_FQDN</li> <li>PLMNID</li> <li>SCPAUTHORITY</li> </ul> |



Table 5-90 (Cont.) ocscp\_metric\_sepp\_http\_rx\_res\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                            |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_sepp_http_rx_res_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_sepp_http_rx_res_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_sepp_http_rx_res_total{ocscp_sepp_fqdn="sepp1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_sepp_http_rx_res_total{plmn_id="mnc123-mcc100"}</li> </ul> |

Table 5-91 ocscp\_metric\_sepp\_http\_tx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of HTTP responses routed towards SEPP.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.                                                                                                                                                                                                                                                                   |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_response_code (e.g., 201, 503, 404, etc.)</li> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_response_code_class (e.g., 2, 5, etc.)</li> <li>ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer)</li> <li>plmn_id(mnc123-mcc254)</li> <li>ocscp_authority</li> </ul> |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_sepp_http_tx_res_total{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_sepp_http_tx_res_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_sepp_http_tx_res_total{ocscp_sepp_fqdn="sepp1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_sepp_http_tx_res_total{plmn_id="mnc123-mcc100"}</li> </ul>                                                                                                           |

Table 5-92 ocscp\_metric\_sepp\_routing\_attempt\_fail\_total

| Field       | Details                                                              |
|-------------|----------------------------------------------------------------------|
| Description | The total number of inter-PLMN requests routing failed towards SEPP. |
| Type        | Counter                                                              |

Table 5-92 (Cont.) ocscp\_metric\_sepp\_routing\_attempt\_fail\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_nf_end_point (Default value = NA)</li> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer)</li> <li>plmn_id(mnc123-mcc254)</li> <li>ocscp_authority</li> <li>ocscp_error_group</li> </ul> |
| Example   | <ul style="list-style-type: none"> <li>ocscp_metric_sepp_routing_attempt_fail_current{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_sepp_routing_attempt_fail_current{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_sepp_routing_attempt_fail_current{ocscp_sepp_fqdn="sepp1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_sepp_routing_attempt_fail_current{plmn_id="mnc123-mcc100"}</li> </ul>                                                                                                                                                                                                                                                           |

Table 5-93 ocscp\_metric\_sepp\_routing\_attempt\_fail\_current

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Set to 1 if inter-plmn requests routing failed towards SEPP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_nf_end_point (Default value = NA)</li> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA)</li> <li>ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA)</li> <li>ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer)</li> <li>plmn_id(mnc123-mcc254)</li> <li>ocscp_authority</li> <li>ocscp_error_group</li> </ul> |

**Table 5-93 (Cont.) ocscp\_metric\_sepp\_routing\_attempt\_fail\_current**

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_sepp_routing_attempt_fail_current{ocscp_nf_type="UDM"}</li> <li>ocscp_metric_sepp_routing_attempt_fail_current{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_sepp_routing_attempt_fail_current{ocscp_sepp_fqdn="sepp1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_sepp_routing_attempt_fail_current{plmn_id="mnc123-mcc100"}</li> </ul> |

**Table 5-94 ocscp\_metric\_sepp\_not\_configured\_total**

| Field       | Details                                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of inter-PLMN requests failed because SEPP is not configured for target PLMN received in interPlmnFqdn from 3gpp-Sbi-Target-apiRoot HTTP header or interPlmnFqdn after discovery response. |
| Type        | Counter                                                                                                                                                                                                     |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>plmn_id(mnc123-mcc254)</li> <li>ocscp_authority</li> </ul>                                            |
| Example     | ocscp_metric_sepp_not_configured_total{plmn_id="mnc123-mcc254"}                                                                                                                                             |

**Table 5-95 ocscp\_metric\_sepp\_not\_configured\_current**

| Field       | Details                                                                                                                                                                                             |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Set to 1 if inter-plmn requests failed because SEPP is not configured for target PLMN received in interPlmnFqdn from 3gpp-Sbi-Target-apiRoot HTTP header or interPlmnFqdn after discovery response. |
| Type        | Gauge                                                                                                                                                                                               |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.)</li> <li>plmn_id(mnc123-mcc254)</li> <li>ocscp_authority</li> </ul>                                    |
| Example     | ocscp_metric_sepp_not_configured_current{plmn_id="mnc123-mcc254"}                                                                                                                                   |

**Table 5-96 ocscp\_metric\_5gsbi\_rx\_req\_total**

| Field       | Details                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of incoming requests. This metric can be used to segregate the ingress requests based on scheme, such as HTTP or HTTPS. |
| Type        | Counter                                                                                                                                  |

**Table 5-96 (Cont.) ocscp\_metric\_5gsbi\_rx\_req\_total**

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_nf_end_point (Default value = NA)</li> <li>ocscp_authority</li> <li>scheme(for example, https)</li> <li>ocscp_consumer_host</li> </ul>                                                                                                   |
| Example   | <ul style="list-style-type: none"> <li>ocscp_metric_5gsbi_rx_req_total{ocscp_nf_type="PCF"}</li> <li>ocscp_metric_5gsbi_rx_req_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>ocscp_metric_5gsbi_rx_req_total{scheme="https"}</li> <li>ocscp_metric_5gsbi_rx_req_total{ocscp_nf_end_point="NA"}</li> <li>ocscp_metric_5gsbi_rx_req_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}</li> </ul> |

**Table 5-97 ocscp\_metric\_5gsbi\_tx\_req\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>The total number of requests forwarded by Service Communication Proxy to the upstream cluster.</p> <p>This metric can be used to segregate the egress requests based on the scheme, such as HTTP or HTTPS.</p>                                                                                                                                                                                                                   |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_nf_end_point (default value = NA)</li> <li>ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>ocscp_authority</li> <li>scheme(for example, https)</li> <li>ocscp_consumer_host</li> </ul>                      |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_5gsbi_tx_req_total{ocscp_nf_type="PCF"}</li> <li>ocscp_metric_5gsbi_tx_req_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>ocscp_metric_5gsbi_tx_req_total{scheme="https"}</li> <li>ocscp_metric_5gsbi_tx_req_total{ocscp_nf_end_point="NA"}</li> <li>ocscp_metric_5gsbi_tx_req_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}</li> </ul> |

Table 5-98 ocscp\_metric\_5gsbi\_tx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>The total number of responses forwarded by SCP with specific HTTP response codes (for example, 201, 503, and so on).</p> <p>This metric can be used to segregate the egress responses based on a scheme, such as HTTP or HTTPS.</p> <p><b>Note:</b>The ocscp_authority dimension will get pegged only when it is enabled using the value.yaml file.<br/>scpAuthorityMetricLabelDisabled: false</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                               |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_response_code(e.g., 201, 503, 404, etc.)</li> <li>ocscp_response_code_class (e.g., 2, 5, etc.)</li> <li>ocscp_authority</li> <li>scheme(e.g., https)</li> </ul>                                                                      |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_5gsbi_tx_res_total{ocscp_nf_type="PCF"}</li> <li>ocscp_metric_5gsbi_tx_res_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>ocscp_metric_5gsbi_tx_res_total{scheme="https"}</li> <li>ocscp_metric_5gsbi_tx_res_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}</li> </ul>                                     |

Table 5-99 ocscp\_metric\_5gsbi\_rx\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>The total number of responses received by SCP with specific HTTP response codes (for example, 201, 503, and so on.)</p> <p>This metric can be used to segregate the ingress responses based on a scheme, such as HTTP or HTTPS.</p>                                                                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_nf_end_point (Default value = NA)</li> <li>ocscp_response_code(e.g., 201, 503, 404, etc.)</li> <li>ocscp_response_code_class (e.g., 2, 5, etc.)</li> <li>ocscp_authority</li> <li>scheme(e.g., https)</li> </ul>                                                   |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_5gsbi_rx_res_total{ocscp_nf_type="PCF"}</li> <li>ocscp_metric_5gsbi_rx_res_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>ocscp_metric_5gsbi_rx_res_total{scheme="https"}</li> <li>ocscp_metric_5gsbi_rx_res_total{ocscp_nf_end_point="NA"}</li> <li>ocscp_metric_5gsbi_rx_res_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}</li> </ul> |

**Table 5-100 ocscp\_metric\_ssl\_certificate\_expire\_total**

| Field       | Details                                                                                                                                                                                                                                                          |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The state of metric becomes 1 when the server or client certificate is about to expire.                                                                                                                                                                          |
| Type        | Gauge                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>certificate_type (for example, 5G_SBI_SERVER_PRIMARY, 5G_SBI_CLIENT_PRIMARY, 5G_SBI_SERVER_SECONDARY, 5G_SBI_CLIENT_SECONDARY, 5G_SBI_TRAFFIC_FEED_PRIMARY, 5G_SBI_TRAFFIC_FEED_SECONDARY)</li> </ul> |
| Example     | ocscp_metric_ssl_certificate_expire_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}                                                                                                                                                                |

**Table 5-101 ocscp\_metric\_scp\_cache\_service\_unreachable\_total**

| Field       | Details                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times SCP worker is unable to find SCP cache service.                                                                                |
| Type        | Counter                                                                                                                                        |
| Dimension   | <ul style="list-style-type: none"> <li>coherenceCluster</li> <li>ocscp_fqdn</li> </ul>                                                         |
| Example     | ocscp_metric_scp_cache_service_unreachable_total{coherenceCluster="scp-coherence-cluster"scp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} |

**Table 5-102 ocscp\_missed\_nf\_notifications\_total**

| Field       | Details                                                  |
|-------------|----------------------------------------------------------|
| Description | Number of times the notifications are missed.            |
| Type        | Counter                                                  |
| Dimension   | nfType                                                   |
| Example     | ocscp_missed_nf_notifications_total{ocscp_nf_type="UDM"} |

**Table 5-103 ocscp\_notifications\_rejected\_topologysource\_nrf\_total**

| Field       | Details                                                                    |
|-------------|----------------------------------------------------------------------------|
| Description | Number of notifications rejected from NRF as topology source.              |
| Type        | Counter                                                                    |
| Dimension   | nfType                                                                     |
| Example     | ocscp_notifications_rejected_topologysource_nrf_total{ocscp_nf_type="UDM"} |

**Table 5-104 ocscp\_nrf\_notifications\_requests\_total**

| Field       | Details                                                                                 |
|-------------|-----------------------------------------------------------------------------------------|
| Description | Number of NRF notifications accepted at notification for further NF profile processing. |
| Type        | nfType                                                                                  |
| Dimension   | Counter                                                                                 |
| Example     | ocscp_nrf_notifications_requests_total{ocscp_nf_type="UDM"}                             |

**Table 5-105 ocscp\_soothsayer\_audit\_db\_fetch**

| Field       | Details                                              |
|-------------|------------------------------------------------------|
| Description | Indicates the database fetched for audit.            |
| Type        | Counter                                              |
| Dimension   | ocscp_soothsayer_audit_db_fetch                      |
| Example     | ocscp_soothsayer_audit_db_fetch{ocscp_nf_type="UDM"} |

**Table 5-106 ocscp\_update\_topology\_source\_failure\_total**

| Field       | Details                                                         |
|-------------|-----------------------------------------------------------------|
| Description | Number of times the topology source information is toggled.     |
| Type        | Counter                                                         |
| Dimension   | nfType                                                          |
| Example     | ocscp_update_topology_source_failure_total{ocscp_nf_type="UDM"} |

**Table 5-107 ocscp\_worker\_pod\_overload\_control\_cpu\_utilization\_warn**

| Field       | Details                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates CPU utilization of SCP worker at Warn level.                                                                        |
| Type        | Gauge                                                                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>                                               |
| Example     | ocscp_worker_pod_overload_control_cpu_utilization_warn{pod_name="ocscp-scp-worker-6fcc755f9b-5hckw",scp_service="scp-worker"} |

**Table 5-108 ocscp\_worker\_pod\_overload\_control\_cpu\_utilization\_minor**

| Field       | Details                                                                         |
|-------------|---------------------------------------------------------------------------------|
| Description | Indicates CPU utilization of SCP worker at Minor level.                         |
| Type        | Gauge                                                                           |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul> |

**Table 5-108 (Cont.) ocscp\_worker\_pod\_overload\_control\_cpu\_utilization\_minor**

| Field   | Details                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------|
| Example | ocscp_worker_pod_overload_control_cpu_utilization_minor{<br>pod_name="ocscp-scp-<br>worker-6fcc755f9b-5hckw",scp_service="scp-worker"} |

**Table 5-109 ocscp\_worker\_pod\_overload\_control\_cpu\_utilization\_major**

| Field       | Details                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates CPU utilization of SCP worker at Major level.                                                                                |
| Type        | Gauge                                                                                                                                  |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>                                                        |
| Example     | ocscp_worker_pod_overload_control_cpu_utilization_major{<br>pod_name="ocscp-scp-<br>worker-6fcc755f9b-5hckw",scp_service="scp-worker"} |

**Table 5-110 ocscp\_notifications\_suspended\_topologysource\_nrf\_total**

| Field       | Details                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------|
| Description | Indicates the number of times SUSPEND notifications are received by SCP.                          |
| Type        | Counter                                                                                           |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>ocscp_producer_nf_instance_id</li> </ul> |
| Example     | ocscp_notifications_suspended_topologysource_nrf_total{st<br>atus="suspended"}                    |

**Table 5-111 ocscp\_notifications\_profile\_deleted\_deregistration\_total**

| Field       | Details                                                                                        |
|-------------|------------------------------------------------------------------------------------------------|
| Description | Indicates the number of times NF profile is removed due to DEREGISTER ED notification.         |
| Type        | Counter                                                                                        |
| Dimension   | <ul style="list-style-type: none"> <li>event</li> <li>ocscp_producer_nf_instance_id</li> </ul> |
| Example     | ocscp_notifications_profile_deleted_deregistration_total{eve<br>nt="deregistered"}             |

**Table 5-112 ocscp\_metric\_ar\_attempt\_fail\_total**

| Field       | Details                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------|
| Description | Indicates the total number of failed alternate routing attempts made using static configuration. |
| Type        | Counter                                                                                          |



**Table 5-112 (Cont.) ocscp\_metric\_ar\_attempt\_fail\_total**

| Field     | Details                                                                                                                                                |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_alternate_route_type</li> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_fqdn</li> </ul> |
| Example   | ocscp_metric_ar_attempt_fail_total{ocscp_alternate_route_type="STATIC_CONFIG"}                                                                         |

**Table 5-113 ocscp\_nrf\_nf\_discovery\_request\_processing\_time\_total**

| Field       | Details                                                                                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the NRF request processing time by the scp-nrfproxy microservice.                                                                                                                                                      |
| Type        | Counter                                                                                                                                                                                                                          |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_producer_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_consumer_nf_type</li> <li>subscriber_info_present</li> <li>ocscp_nrf_service_type</li> <li>is_inter_plmn</li> </ul>  |
| Example     | <ul style="list-style-type: none"> <li>ocscp_nrf_nf_discovery_request_processing_time_total{ocscp_producer_nf_type="PCF"}</li> <li>ocscp_nrf_nf_discovery_request_processing_time_total{ocscp_consumer_nf_type="PCF"}</li> </ul> |

**Table 5-114 ocscp\_nrf\_nf\_discovery\_response\_processing\_time\_total**

| Field       | Details                                                                                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the NRF response processing time by the scp-nrfproxy microservice.                                                                                                                                                       |
| Type        | Counter                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_producer_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_consumer_nf_type</li> <li>subscriber_info_present</li> <li>is_inter_plmn</li> <li>ocscp_nrf_service_type</li> </ul>    |
| Example     | <ul style="list-style-type: none"> <li>ocscp_nrf_nf_discovery_response_processing_time_total{ocscp_producer_nf_type="PCF"}</li> <li>ocscp_nrf_nf_discovery_response_processing_time_total{ocscp_consumer_nf_type="PCF"}</li> </ul> |

Table 5-115 ocscp\_global\_egress\_rl\_bucketkey\_not\_rate\_controlled\_total

| Field       | Details                                                                                                                                                                                                                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates when the local SCP is not performing global rate control while other SCP instances in the scp-cache cluster are performing the rate control.                                                                                                                                        |
| Type        | Counter                                                                                                                                                                                                                                                                                       |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>ocscp_egress_rl_bucketkey</li> </ul>                                                                                                                                                                                               |
| Example     | <ul style="list-style-type: none"> <li>ocscp_global_egress_rl_bucketkey_not_rate_controlled_total(bucketKey="egress_udm3svc.scpsvc.svc.cluster.local")</li> <li>ocscp_global_egress_rl_bucketkey_not_rate_controlled_total(ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local")</li> </ul> |

Table 5-116 ocscp\_global\_egress\_rl\_remote\_participant\_connectivity\_failure

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Monitors the remote coherence participant connectivity status.                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>scp_local_coh_cluster_name</li> <li>scp_remote_coh_cluster_name</li> <li>scp_remote_coh_cluster_fqdn</li> <li>scp_remote_coh_cluster_port</li> <li>scp_remote_coh_cluster_nf_instance_id</li> </ul>                                                                                                                                                                                                                                                                       |
| Example     | ocscp_global_egress_rl_remote_participant_connectivity_failure{applicationName="ocscp",microservice="scp-cache",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",scp_local_coh_cluster_name="scp-coherence-cluster",scp_remote_coh_cluster_fqdn="ocscp-scp-cache.fedsvc.svc.cluster.local",scp_remote_coh_cluster_name="scp-coherence-cluster-fedsvc",scp_remote_coh_cluster_port="30001",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",scp_remote_coh_cluster_nf_instance_id="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"} |

Table 5-117 ocscp\_mediation\_http\_tx\_total

| Field       | Details                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates that the request is forwarded to Mediation.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP. |
| Type        | Counter                                                                                                                                                                                                  |

Table 5-117 (Cont.) ocscp\_mediation\_http\_tx\_total

| Field     | Details                                                                                                                                                                  |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_mediation_triggerpoint</li> <li>ocscp_mediation_filtername</li> </ul> |
| Example   | ocscp_mediation_http_tx_total(ocscp_mediation_filtername="PCFsmpolicy",ocscp_mediation_triggerpoint="requestIngress")                                                    |

Table 5-118 ocscp\_mediation\_http\_rx\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                            |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Indicates that the response is received by SCP from Mediation when Mediation is invoked from the request trigger point and producer NF when Mediation is triggered from the response trigger points.</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_mediation_triggerpoint</li> <li>ocscp_mediation_filtername</li> <li>responseCode</li> <li>responseCodeClass</li> <li>headerModified</li> <li>bodyModified</li> </ul>                                                                                            |
| Example     | ocscp_mediation_http_rx_total(ocscp_mediation_filtername="PCFsmpolicy",ocscp_mediation_triggerpoint="requestIngress")                                                                                                                                                                                                                                              |

Table 5-119 ocscp\_mediation\_upstream\_service\_time\_ms

| Field       | Details                                                                                                                                                                                                                                                                                                                     |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the time taken for Mediation processing.                                                                                                                                                                                                                                                                          |
| Type        | Counter                                                                                                                                                                                                                                                                                                                     |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_mediation_triggerpoint</li> <li>ocscp_med_upstream_service_time</li> <li>ocscp_fqdn</li> </ul>                                                                                                                           |
| Example     | ocscp_mediation_upstream_service_time_ms_total(applicationName="ocscp", microservice="scp-worker",ocscp_med_upstream_service_time="128ms",ocscp_mediation_triggerpoint="requestEgress",ocscp_nf_service_type="nsmf-pdusession",ocscp_nf_type="SMF", ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle") |

**Table 5-120 ocscp\_mediation\_http\_not\_reachable**

| Field       | Details                                                                                                                                                                                                                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates that the request to Mediation has failed or connection is not established.                                                                                                                                                                                                                   |
| Type        | Gauge                                                                                                                                                                                                                                                                                                  |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_mediation_triggerpoint</li> <li>ocscp_response_code</li> <li>ocscp_fqdn</li> </ul>                                                                                                                  |
| Example     | ocscp_mediation_http_not_reachable{applicationName="ocscp",microservice="scp-worker",ocscp_mediation_triggerpoint="requestIngress",ocscp_nf_service_type="npcf-smpolicycontrol",ocscp_nf_type="PCF",ocscp_response_code="503",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle",} |

**Table 5-121 ocscp\_notification\_queue\_utilization**

| Field       | Details                                                                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates Notification queue utilization.                                                                                                                                                                                                                  |
| Type        | Gauge                                                                                                                                                                                                                                                      |
| Dimension   | <ul style="list-style-type: none"> <li>queueName</li> <li>queueCapacity</li> </ul>                                                                                                                                                                         |
| Example     | <ul style="list-style-type: none"> <li>ocscp_notification_queue_utilization{queueName="waitingQueueUDM"}</li> <li>ocscp_notification_queue_utilization &gt; 0</li> <li>ocscp_notification_queue_utilization{queueName="waitingQueueUDM"} &gt; 0</li> </ul> |

**Table 5-122 ocscp\_notification\_queue\_alert**

| Field       | Details                                                                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates Notification queue alert.                                                                                                                                                                                                      |
| Type        | Gauge                                                                                                                                                                                                                                    |
| Dimension   | <ul style="list-style-type: none"> <li>queueName</li> <li>severity</li> <li>queueCapacity</li> </ul>                                                                                                                                     |
| Example     | <ul style="list-style-type: none"> <li>ocscp_notification_queue_alert{queueName="waitingQueueUDM"}</li> <li>ocscp_notification_queue_alert &gt; 0</li> <li>ocscp_notification_queue_alert{queueName="waitingQueueUDM"} &gt; 0</li> </ul> |

**Table 5-123 ocscp\_nrfproxy\_queue\_utilization**

| Field       | Details                               |
|-------------|---------------------------------------|
| Description | Indicates NrfProxy queue utilization. |

**Table 5-123 (Cont.) ocscp\_nrfproxy\_queue\_utilization**

| Field     | Details                                                                                                                                                                                                                                    |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type      | Gauge                                                                                                                                                                                                                                      |
| Dimension | <ul style="list-style-type: none"> <li>queueName</li> <li>queueCapacity</li> </ul>                                                                                                                                                         |
| Example   | <ul style="list-style-type: none"> <li>ocscp_nrfproxy_queue_utilization{queueName="scpUpstreamExecutorQueue"}</li> <li>ocscp_nrfproxy_queue_utilization{queueCapacity="10000"}</li> <li>ocscp_nrfproxy_queue_utilization &gt; 0</li> </ul> |

**Table 5-124 ocscp\_nrfproxy\_queue\_alert**

| Field       | Details                                                                                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates NrfProxy queue alert<br>Metrics Pegging Condition: This metric value will either be 0 or 1. Based on the severity value, it will be 1 for high severity, and correspondingly, for other severity values, it will be 0.                   |
| Type        | Gauge                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>queueName: Name of the queue (scpDownstreamExecutorQueue, scpUpstreamExecutorQueue)</li> <li>severity: CRITICAL, MAJOR, MINOR, NORMAL</li> <li>queueCapacity: The maximum size of queue is 10000</li> </ul> |
| Example     | <ul style="list-style-type: none"> <li>ocscp_nrfproxy_queue_alert{queueName="scpDownstreamExecutorQueue"}</li> <li>ocscp_nrfproxy_queue_alert &gt; 0</li> <li>ocscp_nrfproxy_queue_alert{severity="CRITICAL"}</li> </ul>                           |

**Table 5-125 ocscp\_worker\_queue\_utilization**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                        |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates Worker queue utilization.                                                                                                                                                                                                                                                                                                                            |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                          |
| Dimension   | <ul style="list-style-type: none"> <li>queueName: name of the queue (scpDownstreamExecutorQueue, scpUpstreamExecutorQueue, scpNrfProxyDownstreamExecutorQueue, scpClientExecutorQueue, scpUpdateSSLCertsQueue, scpMediationDownstreamExecutorQueue, scpReconfigureEgressRLExecutorQueue)</li> <li>queueCapacity: The maximum size of queue is 10000</li> </ul> |

Table 5-125 (Cont.) ocscp\_worker\_queue\_utilization

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <p>Below example will return worker queue utilization metric for scpClientExecutorQueue:</p> <ul style="list-style-type: none"> <li>ocscp_worker_queue_utilization{queueName="scpClientExecutorQueue"}</li> </ul> <p>Below example will returns all worker queues utilization metric with queueCapacity:</p> <ul style="list-style-type: none"> <li>ocscp_worker_queue_utilization{queueCapacity="10000"}</li> </ul> <p>Below example will return all worker queue utilization metrics with utilization greater than 0:</p> <ul style="list-style-type: none"> <li>ocscp_worker_queue_utilization &gt; 0</li> </ul> |

Table 5-126 ocscp\_worker\_queue\_alert

| Field       | Details                                                                                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates Worker queue alert.                                                                                                                                                                                |
| Type        | Gauge                                                                                                                                                                                                        |
| Dimension   | <ul style="list-style-type: none"> <li>queueName</li> <li>severity</li> <li>queueCapacity</li> </ul>                                                                                                         |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_queue_alert{queueName="scpUpdateSSL CertsQueue"}</li> <li>ocscp_worker_queue_alert &gt; 0</li> <li>ocscp_worker_queue_alert{severity="MAJOR"}</li> </ul> |

Table 5-127 ocscp\_metric\_nf\_lci\_rx\_total

| Field       | Details                                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Indicates the number of messages received with NF's LCI header.</p> <p>Here, "ocscp_peer_nf_instance_id" denotes the instance ID of the producer from which it has received the LCI header.</p>                            |
| Type        | Counter                                                                                                                                                                                                                       |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>ocscp_peer_nf_instance_id</li> </ul>                                                                                                                               |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_nf_lci_rx_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_nf_lci_rx_total{ocscp_peer_nf_instance_id="instance-id-example"}</li> </ul> |

**Table 5-128 ocscp\_metric\_nf\_lci\_tx\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of messages forwarded with NF's LCI header.<br>Here, "ocscp_peer_nf_instance_id" denotes the instance ID of the NF where it is sending LCI. When sending a request to the producer, it represents the producer instance ID, while when sending a response to the consumer, it represents the consumer instance ID |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>ocscp_peer_nf_instance_id</li> </ul>                                                                                                                                                                                                                                        |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_nf_lci_tx_total{ocscp_fqdn= "ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_nf_lci_tx_total{ocscp_peer_nf_instance_id="instance-id-example"}</li> </ul>                                                                                                         |

**Table 5-129 ocscp\_metric\_scp\_lci\_tx\_total**

| Field       | Details                                                                                                                                                                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of messages forwarded with SCP's LCI header.<br>Here, "ocscp_peer_nf_instance_id" denotes the instance ID of the producer to which SCP sends this request with LCI header.                                                   |
| Type        | Counter                                                                                                                                                                                                                                           |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>ocscp_peer_nf_instance_id</li> </ul>                                                                                                                                                   |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_scp_lci_tx_total{ocscp_fqdn= "ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_scp_lci_tx_total{ocscp_peer_nf_instance_id="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"}</li> </ul> |

**Table 5-130 ocscp\_metric\_nf\_lci\_cache\_update\_total**

| Field       | Details                                                                                         |
|-------------|-------------------------------------------------------------------------------------------------|
| Description | Indicates the number of cache updates done by peer load change.                                 |
| Type        | Counter                                                                                         |
| Dimension   | ocscp_fqdn                                                                                      |
| Example     | ocscp_metric_nf_lci_cache_update_total{ocscp_fqdn= "ocscp-scp-worker.scpsvc.svc.cluster.local"} |

**Table 5-131 ocscp\_scp\_load**

| Field       | Details                          |
|-------------|----------------------------------|
| Description | Metric to record SCP load value. |
| Type        | Gauge                            |

**Table 5-131 (Cont.) ocscp\_scp\_load**

| Field     | Details                                                                                                                                                                                                       |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>ocscp_scp_instance_id</li> </ul>                                                                                                                   |
| Example   | <ul style="list-style-type: none"> <li>ocscp_nf_load{ocscp_fqdn= "ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_nf_load{ocscp_scp_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> </ul> |

**Table 5-132 ocscp\_nf\_load**

| Field       | Details                                                                                                                                                                                                                                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Records the peer NF load value.                                                                                                                                                                                                                                                                                                                       |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                 |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>peer_info</li> <li>ocscp_scope</li> <li>ocscp_producer_service_instance_id</li> </ul>                                                                                                                                                                                                      |
| Example     | <ul style="list-style-type: none"> <li>ocscp_nf_load{ocscp_fqdn= "ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_nf_load{peer_info="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"}</li> <li>ocscp_nf_load{ocscp_scope="nf-instance"}</li> <li>ocscp_nf_load{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</li> </ul> |

**Table 5-133 ocscp\_modeld\_cache\_key\_size**

| Field       | Details                                                                                                                                                                  |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Metric to indicate modelD cache Key size in worker and nrfproxy.                                                                                                         |
| Type        | Gauge                                                                                                                                                                    |
| Dimension   | <ul style="list-style-type: none"> <li>scp_service</li> <li>ocscp_fqdn</li> </ul>                                                                                        |
| Example     | <ul style="list-style-type: none"> <li>ocscp_modeld_cache_key_size{scp_service="scp-nrfproxy"}</li> <li>ocscp_modeld_cache_key_size{scp_service="scp-worker"}</li> </ul> |

**Table 5-134 ocscp\_cache\_egress\_grl\_local\_worker\_token\_consumption\_total**

| Field       | Details                                                                         |
|-------------|---------------------------------------------------------------------------------|
| Description | The local SCP worker token consumption in global egress rate limit.             |
| Type        | Counter                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>bucketKey</li> <li>ocscp_fqdn</li> </ul> |



**Table 5-134 (Cont.) ocscp\_cache\_egress\_grl\_local\_worker\_token\_consumption\_total**

| Field   | Details                                                                                                                                                                                                                                                                                       |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_cache_egress_grl_local_worker_token_consumption_total{bucketKey="egress_pcf1svc.ny-ocscp-01.svc.thrust2"}</li> <li>ocscp_cache_egress_grl_local_worker_token_consumption_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> </ul> |

**Table 5-135 ocscp\_cache\_egress\_grl\_remote\_worker\_token\_consumption\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The remote SCP worker token consumption in global egress rate limit.                                                                                                                                                                                                                                                                 |
| Type        | Counter                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>bucketKey</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                      |
| Example     | <ul style="list-style-type: none"> <li>ocscp_cache_egress_grl_remote_worker_token_consumption_total{bucketKey="6faf1bbc-6e4a-4a54-a507-a14ef8e1bc5d_egress_pcf1svc.ny-ocscp-01.svc.thrust2"}</li> <li>ocscp_cache_egress_grl_remote_worker_token_consumption_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> </ul> |

**Table 5-136 ocscp\_cache\_egress\_grl\_local\_worker\_msg\_consumption\_percentage\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                         |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The local SCP worker token consume percentage in global egress rate limit.                                                                                                                                                                                                                                      |
| Type        | Counter                                                                                                                                                                                                                                                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>bucketKey</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                 |
| Example     | <ul style="list-style-type: none"> <li>ocscp_cache_egress_grl_local_worker_msg_consumption_percentage_total{bucketKey="egress_pcf1svc.ny-ocscp-01.svc.thrust2"}</li> <li>ocscp_cache_egress_grl_local_worker_msg_consumption_percentage_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> </ul> |

**Table 5-137 ocscp\_cache\_egress\_grl\_controller\_token\_consumption\_total**

| Field       | Details                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------|
| Description | The number of tokens consumed by the global rate controller to adjust token availability for cache services. |
| Type        | Counter                                                                                                      |
| Dimension   | <ul style="list-style-type: none"> <li>bucketKey</li> <li>ocscp_fqdn</li> </ul>                              |

**Table 5-137 (Cont.) ocscp\_cache\_egress\_gri\_controller\_token\_consumption\_total**

| Field   | Details                                                                                                                                                                                                                                                                                   |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_cache_egress_gri_controller_token_consumption_total{bucketKey="egress_pcf1svc.ny-ocscp-01.svc.thrust2"}</li> <li>ocscp_cache_egress_gri_controller_token_consumption_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> </ul> |

**Table 5-138 ocscp\_metric\_svc\_unreachable**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged whenever there is a communication failure between microservices. Once the communication between the source and the destination is reestablished, this metric is cleared.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>source: indicates the source svc, such as scp-worker, scpc-configuration, and so on.</li> <li>destination: indicates the destination svc, such as scpc-notification, scp-nrfproxy, and so on.</li> </ul> <p>Possible list of values:</p> <ul style="list-style-type: none"> <li>source: scp-worker, scp-nrfproxy, scpc-audit, scpc-alternate-resolution, scpc-configuration, scpc-notification, scpc-subscription</li> <li>destination: scp-worker, scp-nrfproxy, scpc-audit, scpc-alternate-resolution, scpc-configuration, scpc-notification, scpc-subscription, scp-mediation, scp-cache</li> </ul> |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_svc_unreachable{source="scp-worker", destination="scpc-notification"}</li> <li>ocscp_metric_svc_unreachable{source="scpc-audit", destination="scp-worker"}</li> <li>ocscp_metric_svc_unreachable{source="scpc-subscription", destination="scp-worker"}</li> </ul>                                                                                                                                                                                                                                                                                                                         |

**Table 5-139 ocscp\_metric\_nf\_unhealthy\_total**

| Field       | Details                                                                                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times a producer NF is marked unhealthy.                                                                                                                                                                  |
| Type        | Counter                                                                                                                                                                                                             |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_producer_nf_instance_id</li> <li>ocscp_nf_end_point</li> <li>ocscp_producer_host</li> <li>ocscp_nf_service_type</li> <li>ocscp_locality</li> <li>ocscp_fqdn</li> </ul> |

Table 5-139 (Cont.) ocscp\_metric\_nf\_unhealthy\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_nf_unhealthy_total{ocscp_producer_nf_instance_id="123-ffb"}</li> <li>ocscp_metric_nf_unhealthy_total{ocscp_nf_end_point="10.23.34.54:8080"}</li> <li>ocscp_metric_nf_unhealthy_total{ocscp_producer_host="udm1.svc.cluster.local.com"}</li> <li>ocscp_metric_nf_unhealthy_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_nf_unhealthy_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_nf_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-140 ocscp\_metric\_req\_nf\_unhealthy\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of message requests not routed to the selected producer NF because it is marked unhealthy.                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_producer_nf_instance_id</li> <li>ocscp_nf_end_point</li> <li>ocscp_producer_host</li> <li>ocscp_nf_service_type</li> <li>ocscp_locality</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                                                                                                                        |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_req_nf_unhealthy_total{ocscp_producer_nf_instance_id="123-44b"}</li> <li>ocscp_metric_req_nf_unhealthy_total{ocscp_nf_end_point="10.23.34.54:8080"}</li> <li>ocscp_metric_req_nf_unhealthy_total{ocscp_producer_host="udm1.svc.cluster.local.com"}</li> <li>ocscp_metric_req_nf_unhealthy_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_req_nf_unhealthy_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_req_nf_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-141 ocscp\_metric\_req\_peer\_scp\_unhealthy\_total

| Field       | Details                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of message requests not routed to the selected peer SCP because it is marked unhealthy.                                                                                       |
| Type        | Counter                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_service_type</li> <li>ocscp_peer_scp_instance_id</li> <li>ocscp_peer_scp_fqdn</li> <li>ocscp_fqdn</li> <li>ocscp_locality</li> </ul> |

**Table 5-141 (Cont.) ocscp\_metric\_req\_peer\_scp\_unhealthy\_total**

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_req_peer_scp_unhealthy_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_req_peer_scp_unhealthy_total{ocscp_peer_scp_instance_id="123-23b"}</li> <li>ocscp_metric_req_peer_scp_unhealthy_total{ocscp_peer_scp_fqdn="scp51svc.cluster.local.com"}</li> <li>ocscp_metric_req_peer_scp_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_req_peer_scp_unhealthy_total{ocscp_locality="Loc7"}</li> </ul> |

**Table 5-142 ocscp\_metric\_sepp\_unhealthy\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of times SEPP is marked unhealthy.                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_sepp_intance_id</li> <li>ocscp_sepp_end_point</li> <li>ocscp_sepp_fqdn</li> <li>ocscp_locality</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                                                              |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_sepp_unhealthy_total{ocscp_sepp_intance_id="123-55b"}</li> <li>ocscp_metric_sepp_unhealthy_total{ocscp_sepp_end_point="10.23.34.54:8080"}</li> <li>ocscp_metric_sepp_unhealthy_total{ocscp_sepp_fqdn="sepp1.svc.cluster.local.com"}</li> <li>ocscp_metric_sepp_unhealthy_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_sepp_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-143 ocscp\_metric\_req\_sepp\_unhealthy\_total**

| Field       | Details                                                                                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of message requests not routed to the selected SEPP because SEPP is marked unhealthy.                                                                                                              |
| Type        | Counter                                                                                                                                                                                                   |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_service_type</li> <li>ocscp_sepp_intance_id</li> <li>ocscp_sepp_end_point</li> <li>ocscp_sepp_fqdn</li> <li>ocscp_locality</li> <li>ocscp_fqdn</li> </ul> |

**Table 5-143 (Cont.) ocscp\_metric\_req\_sepp\_unhealthy\_total**

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_metric_req_sepp_unhealthy_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_metric_req_sepp_unhealthy_total{ocscp_sepp_instance_id="123-455b"}</li> <li>ocscp_metric_req_sepp_unhealthy_total{ocscp_sepp_endpoint="10.23.34.54:8080"}</li> <li>ocscp_metric_req_sepp_unhealthy_total{ocscp_sepp_fqdn="sepp1.svc.cluster.local.com"}</li> <li>ocscp_metric_req_sepp_unhealthy_total{ocscp_locality="Loc7"}</li> <li>ocscp_metric_req_sepp_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpvc.svc.cluster.local"}</li> </ul> |

**Table 5-144 ocscp\_metric\_nf\_set\_unhealthy**

| Field       | Details                                                             |
|-------------|---------------------------------------------------------------------|
| Description | Indicates whether all the producer NFs in the NF SET are unhealthy. |
| Type        | Gauge                                                               |
| Dimension   | ocscp_nf_setid                                                      |
| Example     | ocscp_metric_nf_set_unhealthy{ocscp_nf_setid="123-445-363"}         |

**Table 5-145 ocscp\_sepp\_unhealthy**

| Field       | Details                                                                                                                                                                                                                                     |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicate whether all the SEPP instances are unhealthy.                                                                                                                                                                                      |
| Type        | Gauge                                                                                                                                                                                                                                       |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_sepp_instance_id</li> <li>ocscp_sepp_fqdn</li> <li>ocscp_locality</li> </ul>                                                                                                                   |
| Example     | <ul style="list-style-type: none"> <li>ocscp_sepp_unhealthy{ocscp_sepp_instance_id="123-455b"}</li> <li>ocscp_sepp_unhealthy{ocscp_sepp_fqdn="sepp1.svc.cluster.local.com"}</li> <li>ocscp_sepp_unhealthy{ocscp_locality="Loc7"}</li> </ul> |

**Table 5-146 ocscp\_metric\_trafficfeed\_not\_attempted\_total**

| Field       | Details                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of messages selected for traffic feed based on the trigger point configuration filter criteria but not attempted to send because of some condition. |
| Type        | Counter                                                                                                                                                    |

**Table 5-146 (Cont.) ocscp\_metric\_trafficfeed\_not\_attempted\_total**

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_nf_type (for example, UDM, PCF, AMF, and so on.)</li> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_trafficfeed_triggerpoint (for example, requestIngress, requestEgress, responseIngress, responseEgress)</li> <li>ocscp_cause (for example, CRITICAL Pod Overload, Incorrect Data Director Information, Send Failed)</li> <li>kafka_partition_id</li> <li>kafka_broker_id</li> <li>ocscp_fqdn</li> </ul> |
| Example   | ocscp_metric_trafficfeed_not_attempted_total{ocscp_nf_type="UDM",ocscp_cause="Incorrect Data Director Information",ocscp_nf_service_type="nudm-uecm",ocscp_trafficfeed_triggerpoint="requestEgress",kafka_partition_id="NA",kafka_broker_id="NA"}                                                                                                                                                                                                                                                 |

**Table 5-147 ocscp\_metric\_trafficfeed\_failed\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of messages failed to send to traffic feed.                                                                                                                                                                                                                                                                                                                                                                                 |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_trafficfeed_triggerpoint (for example, requestIngress, requestEgress, responseIngress, responseEgress.)</li> <li>ocscp_cause(for example, CRITICAL Pod Overload, Incorrect Data Director Information, Send Failed.)</li> <li>kafka_partition_id</li> <li>kafka_broker_id</li> <li>ocscp_fqdn</li> </ul> |
| Example     | ocscp_metric_trafficfeed_failed_total{ocscp_cause="Incorrect Data Director Information",ocscp_nf_service_type="nudm-uecm",ocscp_trafficfeed_triggerpoint="requestEgress"}                                                                                                                                                                                                                                                          |

**Table 5-148 ocscp\_metric\_trafficfeed\_attempted\_total**

| Field       | Details                                  |
|-------------|------------------------------------------|
| Description | Number of messages sent to traffic feed. |
| Type        | Counter                                  |

**Table 5-148 (Cont.) ocscp\_metric\_trafficfeed\_attempted\_total**

| Field     | Details                                                                                                                                                                                                                                                                                                                |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.)</li> <li>ocscp_trafficfeed_triggerpoint (for example, requestIngress, requestEgress, responseIngress, responseEgress.)</li> <li>kafka_partition_id</li> <li>kafka_broker_id</li> <li>ocscp_fqdn</li> </ul> |
| Example   | ocscp_metric_trafficfeed_total{ocscp_nf_service_type="naus-f-auth",ocscp_trafficfeed_triggerpoint="requestEgress"}                                                                                                                                                                                                     |

**Table 5-149 ocscp\_worker\_fqdn\_resolution\_total**

| Field       | Details                                                                                                                                                                                                                                                                                             |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of messages for which fqdn is resolved by DNS or from nfProfile.                                                                                                                                                                                                                             |
| Type        | Counter                                                                                                                                                                                                                                                                                             |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_service_type</li> <li>ocscp_fqdn_resolution</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                          |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_fqdn_resolution_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_worker_fqdn_resolution_total{ocscp_fqdn_resolution="dns"}</li> <li>ocscp_worker_fqdn_resolution_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> </ul> |

**Table 5-150 ocscp\_worker\_interplmn\_fqdn\_resolution\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                           |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of messages for which inter-plmn fqdn is resolved by DNS or from nfProfile.                                                                                                                                                                                                                                                |
| Type        | Counter                                                                                                                                                                                                                                                                                                                           |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_service_type</li> <li>ocscp_fqdn_resolution</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                        |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_interplmn_fqdn_resolution_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_worker_interplmn_fqdn_resolution_total{ocscp_fqdn_resolution="dns"}</li> <li>ocscp_worker_interplmn_fqdn_resolution_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> </ul> |

Table 5-151 ocscp\_worker\_http\_req\_host\_type\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Number of messages with http host as IP or FQDN.</p> <p><b>Note:</b> When a message request is implicit or of default notification type, the value of the ocscp_worker_http_req_host_type_total metric is updated based on the host of the message request, with value IP or FQDN that is independent of the configuration of the Egress Host Preference feature.</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_consumer_host</li> <li>ocscp_consumer_nf_instance_id</li> <li>ocscp_consumer_nf_type</li> <li>ocscp_nf_service_type</li> <li>host_type</li> <li>ocscp_fqdn</li> </ul> <p><b>Note:</b> These dimensions are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats.</p>                                  |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_http_req_host_type_total{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_worker_http_req_host_type_total{host_type="fqdn"}</li> <li>ocscp_worker_http_req_host_type_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> </ul>                                                                                                                                                                                                                               |

Table 5-152 ocscp\_worker\_cpu\_pod\_overload\_control\_status

| Field       | Details                                                                                                                                                                                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates CPU utilization of SCP worker at any level.                                                                                                                                                                                                                                                                            |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> <li>ocscp_threshold_level</li> </ul>                                                                                                                                                                                                                   |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_cpu_pod_overload_control_status{pod_name="ocscp-scp-worker-647595788d-7tbx9",scp_service="scp-worker",ocscp_threshold_level="major"}</li> <li>ocscp_worker_cpu_pod_overload_control_status{pod_name="ocscp-scp-worker-647595788d-7tbx9",scp_service="scp-worker"}</li> </ul> |



**Table 5-153 ocscp\_worker\_pod\_overload\_control\_pendingTrans\_utilization\_minor**

| Field       | Details                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates pending transaction utilization of SCP worker at minor level.                                                                 |
| Type        | Gauge                                                                                                                                   |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>                                                         |
| Example     | ocscp_worker_pod_overload_control_pendingTrans_utilization_minor{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} |

**Table 5-154 ocscp\_worker\_pod\_overload\_control\_pendingTrans\_utilization\_major**

| Field       | Details                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates pending transaction utilization of SCP worker at major level.                                                                 |
| Type        | Gauge                                                                                                                                   |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>                                                         |
| Example     | ocscp_worker_pod_overload_control_pendingTrans_utilization_major{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} |

**Table 5-155 ocscp\_worker\_pod\_overload\_control\_pendingTrans\_utilization\_critical**

| Field       | Details                                                                                                                                    |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates pending transaction utilization of SCP worker at critical level.                                                                 |
| Type        | Gauge                                                                                                                                      |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>                                                            |
| Example     | ocscp_worker_pod_overload_control_pendingTrans_utilization_critical{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} |

**Table 5-156 ocscp\_worker\_pod\_overload\_control\_pendingTrans\_utilization\_warn**

| Field       | Details                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates pending transaction utilization of SCP worker at warn level.                                                                 |
| Type        | Gauge                                                                                                                                  |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>                                                        |
| Example     | ocscp_worker_pod_overload_control_pendingTrans_utilization_warn{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} |

**Table 5-157 ocscp\_worker\_pendingTrans\_pod\_overload\_control\_status**

| Field       | Details                                                                                                                                                                                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates pending transaction utilization of SCP worker at any level.                                                                                                                                                                                                                                                                              |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> <li>ocscp_threshold_level</li> </ul>                                                                                                                                                                                                                                     |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_pendingTrans_pod_overload_control_status{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}</li> <li>ocscp_worker_pendingTrans_pod_overload_control_status{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker",ocscp_threshold_level="major"}</li> </ul> |

**Table 5-158 ocscp\_worker\_pod\_overload\_control\_resource\_utilization\_minor**

| Field       | Details                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates overload control resource utilization of SCP worker at minor level.                                                       |
| Type        | Gauge                                                                                                                               |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>                                                     |
| Example     | ocscp_worker_pod_overload_control_resource_utilization_minor{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} |

**Table 5-159 ocscp\_worker\_pod\_overload\_control\_resource\_utilization\_major**

| Field       | Details                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates overload control resource utilization of SCP worker at major level.                                                       |
| Type        | Gauge                                                                                                                               |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>                                                     |
| Example     | ocscp_worker_pod_overload_control_resource_utilization_major{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} |

**Table 5-160 ocscp\_worker\_pod\_overload\_control\_resource\_utilization\_critical**

| Field       | Details                                                                          |
|-------------|----------------------------------------------------------------------------------|
| Description | Indicates overload control resource utilization of SCP worker at critical level. |
| Type        | Gauge                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>  |

**Table 5-160 (Cont.) ocscp\_worker\_pod\_overload\_control\_resource\_utilization\_critical**

| Field   | Details                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------|
| Example | ocscp_worker_pod_overload_control_resource_utilization_critical{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} |

**Table 5-161 ocscp\_worker\_pod\_overload\_control\_resource\_utilization\_warn**

| Field       | Details                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates overload control resource utilization of SCP worker at warn level.                                                       |
| Type        | Gauge                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> </ul>                                                    |
| Example     | ocscp_worker_pod_overload_control_resource_utilization_warn{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} |

**Table 5-162 ocscp\_worker\_pod\_overload\_control\_status**

| Field       | Details                                                                                                                                                                                                                                                                                                                  |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates overload control resource utilization of SCP worker at any level.                                                                                                                                                                                                                                              |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                    |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>scp_service</li> <li>ocscp_threshold_level</li> </ul>                                                                                                                                                                                                           |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_pod_overload_control_status{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}</li> <li>ocscp_worker_pod_overload_control_status{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker",ocscp_threshold_level="major"}</li> </ul> |

**Table 5-163 ocscp\_worker\_cca\_validation\_performed\_total**

| Field       | Details                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------|
| Description | Indicates the number of requests on which CCA validation is performed.                             |
| Type        | Counter                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> </ul>                                       |
| Example     | ocscp_worker_cca_validation_performed_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"} |

**Table 5-164 ocscp\_worker\_cca\_validation\_failed\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of requests that failed CCA validation.                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>cca_consumer_nflInstanceId (not_available in case header is not present)</li> <li>san_consumer_nflInstanceId</li> <li>validation_type (subject/headerpresence)</li> </ul>                                                                                                                                                                                                                                            |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_cca_validation_failed_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> <li>ocscp_worker_cca_validation_failed_total{cca_consumer_nflInstanceId="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"}</li> <li>ocscp_worker_cca_validation_failed_total{san_consumer_nflInstanceId="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"}</li> <li>ocscp_worker_cca_validation_failed_total{validation_type="headerpresence"}</li> </ul> |

**Table 5-165 ocscp\_worker\_cca\_validation\_feature\_enabled\_without\_https**

| Field       | Details                                                                                                          |
|-------------|------------------------------------------------------------------------------------------------------------------|
| Description | The CCA header validation feature is enabled without SCP HTTPS deployment.                                       |
| Type        | Gauge                                                                                                            |
| Dimension   | ocscp_fqdn                                                                                                       |
| Example     | ocscp_worker_cca_validation_feature_enabled_without_https{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"} |

**Table 5-166 ocscp\_cache\_queue\_alert**

| Field       | Details                                                                                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the cache queue alert.<br>Metrics Pegging Condition: This metric value is either 0 or 1. Based on severity, the value will be 1 for that severity, and correspondingly, for other severities, the value will be 0.                                                                                                          |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                 |
| Dimension   | <ul style="list-style-type: none"> <li>queueName : name of the queue (scpCacheExecutorQueue, accessTokenAppEvExecutorQueue, accessTokenCohEvExecutorQueue)</li> <li>queueCapacity : The maximum size of queue is 30000 for scpCacheExecutorQueue and for others it 10000</li> <li>severity: CRITICAL, MAJOR, MINOR, NORMAL</li> </ul> |

Table 5-166 (Cont.) ocscp\_cache\_queue\_alert

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>The following example returns the cache queue alert metric for scpCacheExecutorQueue; for severity one instance will be 1, and all others will be either 0 or not pegged: <ul style="list-style-type: none"> <li>ocscp_cache_queue_alert{queueName="scpUpdateSSLCertsQueue"}</li> </ul> </li> <li>The following example returns all cache queue alert metrics with a value of 1: <ul style="list-style-type: none"> <li>ocscp_cache_queue_alert&gt; 0</li> </ul> </li> <li>The following example returns the cache queue alert metric for severity MAJOR: <ul style="list-style-type: none"> <li>ocscp_cache_queue_alert{severity="MAJOR"}</li> </ul> </li> </ul> |

Table 5-167 ocscp\_load\_manager\_queue\_utilization

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the load manager queue utilization.<br>Metrics Pegging Condition: This metric value shows the current utilisation of the queue.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Dimension   | <ul style="list-style-type: none"> <li>queueName : name of the queue (sutLciCohEvExecutorQueue, sutLciAppEvExecutorQueue, peerLciCohEvExecutorQueue, peerLciAppEvExecutorQueue, loadCohEvExecutorQueue, loadAppEvExecutorQueue)</li> <li>queueCapacity : 10000</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Example     | <ul style="list-style-type: none"> <li>The following example returns the load manager queue utilization metric for sutLciCohEvExecutorQueue: <ul style="list-style-type: none"> <li>ocscp_load_manager_queue_utilization{queueName="sutLciCohEvExecutorQueue"}</li> </ul> </li> <li>The following example returns all load manager queues utilization metric with queueCapacity: <ul style="list-style-type: none"> <li>ocscp_load_manager_queue_utilization{queueCapacity="10000"}</li> </ul> </li> <li>The following example returns all load manager queue utilization metrics with utilization greater than 0: <ul style="list-style-type: none"> <li>ocscp_load_manager_queue_utilization&gt; 0</li> </ul> </li> </ul> |

Table 5-168 ocscp\_load\_manager\_queue\_alert

| Field       | Details                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the load manager queue alert.<br>Metrics Pegging Condition: This metric value is either 0 or 1. Based on severity, the value will be 1 for that severity, and correspondingly, for other severities, the value will be 0. |
| Type        | Gauge                                                                                                                                                                                                                               |

Table 5-168 (Cont.) ocscp\_load\_manager\_queue\_alert

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>• queueName : name of the queue (sutLciCohEvExecutorQueue, sutLciAppEvExecutorQueue, peerLciCohEvExecutorQueue, peerLciAppEvExecutorQueue, loadCohEvExecutorQueue, loadAppEvExecutorQueue)</li> <li>• queueCapacity : 10000</li> <li>• severity: CRITICAL, MAJOR, MINOR, NORMAL</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Example   | <ul style="list-style-type: none"> <li>• The following example returns the load manager queue alert metric for sutLciCohEvExecutorQueue; for severity one instance will be 1, and all others will be either 0 or not pegged: <ul style="list-style-type: none"> <li>– ocscp_load_manager_queue_alert{queueName="sutLciCohEvExecutorQueue"}</li> </ul> </li> <li>• The following example returns all load manager queue alert metrics with a value of 1: <ul style="list-style-type: none"> <li>– ocscp_load_manager_queue_alert&gt; 0</li> </ul> </li> <li>• The following example returns the load manager queue alert metric for severity MAJOR: <ul style="list-style-type: none"> <li>– ocscp_load_manager_queue_alert{severity="MAJOR"}</li> </ul> </li> </ul> |

Table 5-169 ocscp\_global\_egress\_rl\_remote\_participant\_is\_duplicate

| Field       | Details                                                                                                                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric keeps track of duplicate remote coherence participants.                                                                                                                                                                                                                                      |
| Type        | Gauge                                                                                                                                                                                                                                                                                                    |
| Dimension   | <ul style="list-style-type: none"> <li>• ocscp_fqdn</li> <li>• scp_nf_instance_id</li> <li>• scp_local_coh_cluster_name</li> <li>• scp_remote_coh_cluster_name</li> <li>• scp_remote_coh_cluster_nf_instance_id</li> <li>• scp_remote_coh_cluster_fqdn</li> <li>• scp_remote_coh_cluster_port</li> </ul> |

Table 5-169 (Cont.) ocscp\_global\_egress\_rl\_remote\_participant\_is\_duplicate

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <pre>ocscp_global_egress_rl_remote_participant_is_duplicate{ap p="ocscp-scp-cache", app_kubernetes_io_component="microService", app_kubernetes_io_instance="ocscp", app_kubernetes_io_managed_by="Helm", app_kubernetes_io_name="scp-cache", app_kubernetes_io_part_of="ocscp", app_kubernetes_io_version="&lt;SCP release version&gt;", coherenceCluster="scp-coherence-cluster", helm_sh_chart="scp-cache-25.2.100-beta.22", instance="192.168.140.194:8091", job="kubernetes-pods", microservice="scp-cache", namespace="scpsvc", pod="ocscp-scp-cache-dc9b4775b-vhmtx", pod_template_hash="dc9b4775b", ocscp_fqdn="ocscp-scp- worker.scpsvc.svc.cluster.local", scp_local_coh_cluster_name="scp-coherence-cluster", scp_nf_instance_id="6faf1bbc-6e4a-4454-a507- a14ef8e1bc5e", scp_remote_coh_cluster_fqdn="ocats-scp- ocats-scpglbratelimitstub.scpsvc.svc.cluster.local", scp_remote_coh_cluster_name="scpstub-coherence- cluster", scp_remote_coh_cluster_nf_instance_id="6faf1bbc-6e4a-44 54-a507-a14ef8e1bc5e", scp_remote_coh_cluster_port="30001", vendor="oracle"}</pre> |

Table 5-170 ocscp\_worker\_health\_check\_rx\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of health check requests received by SCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>ocscp_fqdn</li> <li>ocscp_nf_instance_id</li> <li>ocscp_consumer_host</li> <li>ocscp_consumer_nf_instance_id</li> <li>ocscp_consumer_nf_type</li> <li>ocscp_consumer_nf_unique_id</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_health_check_rx_req_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"}</li> <li>ocscp_worker_health_check_rx_req_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> <li>ocscp_worker_health_check_rx_req_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_health_check_rx_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_worker_health_check_rx_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_health_check_rx_req_total{ocscp_consumer_nf_type="SMF"}</li> <li>ocscp_worker_health_check_rx_req_total{ocscp_consumer_nf_unique_id="SE1SMSF1"}</li> </ul> |

**Table 5-171 ocscp\_worker\_health\_check\_success\_res\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of success responses sent by SCP in response to the health check status query                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>ocscp_fqdn</li> <li>ocscp_nf_instance_id</li> <li>ocscp_consumer_host</li> <li>ocscp_consumer_nf_instance_id</li> <li>ocscp_consumer_nf_type</li> <li>ocscp_consumer_nf_unique_id</li> <li>successRspType</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Example     | <ul style="list-style-type: none"> <li>ocscp_worker_health_check_success_res_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"}</li> <li>ocscp_worker_health_check_success_res_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> <li>ocscp_worker_health_check_success_res_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_health_check_success_res_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_worker_health_check_success_res_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_health_check_success_res_total{ocscp_consumer_nf_type="SMF"}</li> <li>ocscp_worker_health_check_success_res_total{ocscp_consumer_nf_unique_id="SE1SMSF1"}</li> <li>ocscp_worker_health_check_success_res_total{successRspType="200"}</li> </ul> |

**Table 5-172 ocscp\_worker\_health\_check\_error\_res\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of error responses sent by SCP in response to the health check status query                                                                                                                                                                                                                                  |
| Type        | Counter                                                                                                                                                                                                                                                                                                             |
| Dimension   | <ul style="list-style-type: none"> <li>pod_name</li> <li>ocscp_fqdn</li> <li>ocscp_nf_instance_id</li> <li>ocscp_consumer_host</li> <li>ocscp_consumer_nf_instance_id</li> <li>ocscp_consumer_nf_type</li> <li>ocscp_consumer_nf_unique_id</li> <li>status</li> <li>cause</li> <li>detail</li> <li>title</li> </ul> |



Table 5-172 (Cont.) ocscp\_worker\_health\_check\_error\_res\_total

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_worker_health_check_error_res_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"}</li> <li>ocscp_worker_health_check_error_res_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> <li>ocscp_worker_health_check_error_res_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_health_check_error_res_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_worker_health_check_error_res_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_health_check_error_res_total{ocscp_consumer_nf_type="SMF"}</li> <li>ocscp_worker_health_check_error_res_total{cause="NF_CONGESTION_RISK"}</li> <li>ocscp_worker_health_check_error_res_total{detail="NF service is overloaded/congested"}</li> <li>ocscp_worker_health_check_error_res_total{status="503"}</li> <li>ocscp_worker_health_check_error_res_total{title="NF service is overloaded/congested"}</li> </ul> |

Table 5-173 ocscp\_interscp\_health\_check\_status\_success\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of health check success status of peer SCP based on Outlier Detection and Health Check features                                                                                                                                                                                                                                                                                                                                                                                                |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Dimension   | <ul style="list-style-type: none"> <li>interScpHost</li> <li>pod_name</li> <li>ocscp_nf_instance_id</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                                                                                                                                    |
| Example     | <ul style="list-style-type: none"> <li>ocscp_interscp_health_check_status_success_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_interscp_health_check_status_success_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_interscp_health_check_status_success_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"}</li> <li>ocscp_interscp_health_check_status_success_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-174 ocscp\_interscp\_health\_check\_status\_failure\_total

| Field       | Details                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------|
| Description | Number of health check failure status of peer SCP based on Outlier Detection and Health check features |
| Type        | Counter                                                                                                |

Table 5-174 (Cont.) ocscp\_interscp\_health\_check\_status\_failure\_total

| Field     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>• interScpHost</li> <li>• pod_name</li> <li>• ocscp_nf_instance_id</li> <li>• ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                                                                                                                                    |
| Example   | <ul style="list-style-type: none"> <li>• ocscp_interscp_health_check_status_failure_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"}</li> <li>• ocscp_interscp_health_check_status_failure_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>• ocscp_interscp_health_check_status_failure_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"}</li> <li>• ocscp_interscp_health_check_status_failure_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-175 ocscp\_health\_check\_status\_failed

| Field       | Details                                                                                                                                                                                                                                                                                                                                   |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>SCP health check status.</p> <p>The value can be either 0 or 1.</p> <p>0 indicates SCP health check status is successful.</p> <p>1 indicates SCP health check status has failed.</p>                                                                                                                                                   |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                     |
| Dimension   | <ul style="list-style-type: none"> <li>• pod_name</li> <li>• ocscp_fqdn</li> <li>• ocscp_nf_instance_id</li> <li>• ocscp_consumer_host</li> <li>• ocscp_consumer_nf_instance_id</li> <li>• ocscp_consumer_nf_type</li> <li>• ocscp_consumer_nf_unique_id</li> <li>• status</li> <li>• cause</li> <li>• detail</li> <li>• title</li> </ul> |

Table 5-175 (Cont.) ocscp\_health\_check\_status\_failed

| Field   | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example | <ul style="list-style-type: none"> <li>ocscp_health_check_status_failed{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"}</li> <li>ocscp_health_check_status_failed{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}</li> <li>ocscp_health_check_status_failed{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_health_check_status_failed{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"}</li> <li>ocscp_health_check_status_failed{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_health_check_status_failed{ocscp_consumer_nf_type="SMF"}</li> <li>ocscp_health_check_status_failed{cause="NF_CONGESTION_RISK"}</li> <li>ocscp_health_check_status_failed{detail="NF service is overloaded/congested"}</li> <li>ocscp_health_check_status_failed{status="503"}</li> <li>ocscp_health_check_status_failed{title="NF service is overloaded/congested"}</li> </ul> |

Table 5-176 ocscp\_interscp\_health\_check\_status\_failed

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Inter-SCP health check status based on Outlier Detection and Health Check features</p> <p>The value can be either 0 or 1.</p> <p>0 indicates inter-SCP health check status is successful.</p> <p>1 indicates inter-SCP health check status has failed.</p>                                                                                                                                                                                                                    |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>interScpHost</li> <li>pod_name</li> <li>ocscp_nf_instance_id</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                                                                                                               |
| Example     | <ul style="list-style-type: none"> <li>ocscp_interscp_health_check_status_failure_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_interscp_health_check_status_failed{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_interscp_health_check_status_failed{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"}</li> <li>ocscp_interscp_health_check_status_failed{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-177 ocscp\_oauth\_access\_token\_cache\_match\_total

| Field       | Details                                                                           |
|-------------|-----------------------------------------------------------------------------------|
| Description | Number of times requests fetched by access token from cache in SCP-nrfProxy-oauth |
| Type        | Counter                                                                           |

**Table 5-177 (Cont.) ocscp\_oauth\_access\_token\_cache\_match\_total**

| Field     | Details    |
|-----------|------------|
| Dimension | ocscp_fqdn |
| Example   | -          |

**Table 5-178 ocscp\_worker\_access\_token\_forwarded\_in\_tx\_res\_total**

| Field       | Details                                                 |
|-------------|---------------------------------------------------------|
| Description | Number of responses in the 3gpp-Sbi-Access-Token header |
| Type        | Counter                                                 |
| Dimension   | ocscp_fqdn                                              |
| Example     | -                                                       |

**Table 5-179 ocscp\_worker\_access\_token\_forwarded\_in\_tx\_req\_total**

| Field       | Details                                                |
|-------------|--------------------------------------------------------|
| Description | Number of requests in the 3gpp-Sbi-Access-Token header |
| Type        | Counter                                                |
| Dimension   | ocscp_fqdn                                             |
| Example     | -                                                      |

**Table 5-180 ocscp\_worker\_access\_token\_cache\_match\_total**

| Field       | Details                                                                |
|-------------|------------------------------------------------------------------------|
| Description | Number of times requests fetched access token from cache in SCP-Worker |
| Type        | Counter                                                                |
| Dimension   | ocscp_fqdn                                                             |
| Example     | -                                                                      |

**Table 5-181 ocscp\_nrf\_oauth\_error\_counts\_total**

| Field       | Details                                                                        |
|-------------|--------------------------------------------------------------------------------|
| Description | Error responses received from NRF                                              |
| Type        | Counter                                                                        |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_sub</li> <li>ocscp_aud</li> </ul> |
| Example     | -                                                                              |

**Table 5-182 ocscp\_oauth\_access\_token\_tx\_rsp\_total**

| Field       | Details                                          |
|-------------|--------------------------------------------------|
| Description | Responses from SCP-nrfProxy-oauth to SCP-Worker. |
| Type        | Counter                                          |

**Table 5-182 (Cont.) ocscp\_oauth\_access\_token\_tx\_rsp\_total**

| Field     | Details                                                                                                                                    |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>ocscp_response_code</li> <li>requester_nfType</li> <li>target_nfType</li> </ul> |
| Example   | -                                                                                                                                          |

**Table 5-183 ocscp\_oauth\_access\_token\_rx\_res\_total**

| Field       | Details                                                                                                                                    |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Responses from NRF to SCP-nrfProxy-oauth through SCP-Worker.                                                                               |
| Type        | Counter                                                                                                                                    |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>ocscp_response_code</li> <li>requester_nfType</li> <li>target_nfType</li> </ul> |
| Example     | -                                                                                                                                          |

**Table 5-184 ocscp\_oauth\_access\_token\_tx\_req\_total**

| Field       | Details                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------|
| Description | Requests generated by SCP-nrfProxy-oauth toward NRF through SCP-Worker.                                       |
| Type        | Counter                                                                                                       |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>requester_nfType</li> <li>target_nfType</li> </ul> |
| Example     | -                                                                                                             |

**Table 5-185 ocscp\_oauth\_access\_token\_rx\_req\_total**

| Field       | Details                                                      |
|-------------|--------------------------------------------------------------|
| Description | Requests received in the SCP-nrfProxy-oauth from SCP-Worker. |
| Type        | Counter                                                      |
| Dimension   | ocscp_fqdn                                                   |
| Example     | -                                                            |

**Table 5-186 ocscp\_worker\_access\_token\_rx\_res\_total**

| Field       | Details                                                      |
|-------------|--------------------------------------------------------------|
| Description | Access token response from SCP-nrfProxy-oauth to SCP-Worker. |
| Type        | Counter                                                      |

**Table 5-186 (Cont.) ocscp\_worker\_access\_token\_rx\_res\_total**

| Field     | Details                                                                                                                                                                                                                                         |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_consumer_nf_type</li> <li>ocscp_response_code</li> <li>ocscp_response_code_class</li> </ul>                              |
| Example   | ocscp_worker_access_token_rx_res_total{ocscp_consumer_nf_type="AMF",ocscp_nf_service_type="nsmf-pdusession",ocscp_nf_type="SMF",ocscp_response_code="200",ocscp_response_code_class="2",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} |

**Table 5-187 ocscp\_worker\_access\_token\_tx\_req\_total**

| Field       | Details                                                                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Access token request from SCP-Worker to SCP-nrfProxy-oauth.                                                                                                                             |
| Type        | Counter                                                                                                                                                                                 |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_consumer_nf_type</li> </ul>                                      |
| Example     | ocscp_worker_access_token_tx_req_total{ocscp_consumer_nf_type="AMF",ocscp_nf_service_type="nsmf-pdusession",ocscp_nf_type="SMF",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} |

**Table 5-188 ocscp\_audit\_interscp\_health\_check\_tx\_req\_total**

| Field       | Details                                                                                                                                                                                                                                                            |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of inter-SCP health check requests triggered by SCPC-Audit to SCP-Worker                                                                                                                                                                                    |
| Type        | Counter                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>interScpHost</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                 |
| Example     | <ul style="list-style-type: none"> <li>ocscp_audit_interscp_health_check_tx_req_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_audit_interscp_health_check_tx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

**Table 5-189 ocscp\_audit\_interscp\_health\_check\_rx\_res\_total**

| Field       | Details                                                                           |
|-------------|-----------------------------------------------------------------------------------|
| Description | Number of inter-SCP health check responses received by SCPC-Audit from SCP-Worker |
| Type        | Counter                                                                           |

**Table 5-189 (Cont.) ocscp\_audit\_interscp\_health\_check\_rx\_res\_total**

| Field     | Details                                                                                                                                                                                                                                                                                                                                        |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>interScpHost</li> <li>ocscp_fqdn</li> <li>responseCode</li> </ul>                                                                                                                                                                                                                                       |
| Example   | <ul style="list-style-type: none"> <li>ocscp_audit_interscp_health_check_rx_res_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_audit_interscp_health_check_rx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_audit_interscp_health_check_rx_res_total{responseCode="200"}</li> </ul> |

**Table 5-190 ocscp\_notification\_lock\_operation\_time**

| Field       | Details                                                                                                                                                                                                                                                           |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the time taken to acquire and release the lock                                                                                                                                                                                                          |
| Type        | Counter                                                                                                                                                                                                                                                           |
| Dimension   | <ul style="list-style-type: none"> <li>nfInstanceId: NfInstanceId of the notification for which the lock operation is performed</li> <li>lockEvent: lock event (Released or Acquire)</li> <li>timeInMs: time taken by the lock event</li> </ul>                   |
| Example     | <ul style="list-style-type: none"> <li>ocscp_notification_lock_operation_time{namespace="ocscp"}</li> <li>ocscp_notification_lock_operation_time{lockEvent="ACQUIRED_LOCK"}</li> <li>ocscp_notification_lock_operation_time{lockEvent="RELEASED_LOCK"}</li> </ul> |

**Table 5-191 ocscp\_ignored\_processed\_nf\_notification\_total**

| Field       | Details                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the notifications that are not processed (ignored) because another notification with the same nfInstanceId is processed by another thread.                                     |
| Type        | Counter                                                                                                                                                                                  |
| Dimension   | <ul style="list-style-type: none"> <li>nfType: NfType of the notification</li> <li>nfInstanceId: NfInstanceId of the notification</li> </ul>                                             |
| Example     | <ul style="list-style-type: none"> <li>ocscp_ignored_processed_nf_notification_total{namespace="ocscp"}</li> <li>ocscp_ignored_processed_nf_notification_total{nfType="AUSF"}</li> </ul> |

**Table 5-192 ocscp\_notification\_queue\_waiting\_time**

| Field       | Details                                                            |
|-------------|--------------------------------------------------------------------|
| Description | Indicates the time taken by the notification in the waiting queue. |
| Type        | Counter                                                            |

**Table 5-192 (Cont.) ocscp\_notification\_queue\_waiting\_time**

| Field     | Details                                                                                                                                                                                                   |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension | <ul style="list-style-type: none"> <li>• nfType: NfType of the notification</li> <li>• nfInstanceId: NfInstanceId of the notification</li> <li>• time: time taken by the notification in queue</li> </ul> |
| Example   | ocscp_notification_queue_waiting_time {namespace="ocscp"}                                                                                                                                                 |

**Table 5-193 ocscp\_notification\_profile\_processing\_time**

| Field       | Details                                                                                                                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the total time taken to process notifications.                                                                                                                                                                                                                                                 |
| Type        | Counter                                                                                                                                                                                                                                                                                                  |
| Dimension   | <ul style="list-style-type: none"> <li>• nfType: NfType of the notification</li> <li>• nfInstanceId: NfInstanceId of the notification</li> <li>• nfProfileProcessingStatus: Status of the notification processing</li> <li>• processingTimeInMs: Total Time taken for notification processing</li> </ul> |
| Example     | ocscp_notification_profile_processing_time {nfType = "AUSF"}                                                                                                                                                                                                                                             |

**Table 5-194 ocscp\_metric\_5gsbi\_upstream\_destination\_rejection\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Tracks the total number of upstream destinations rejected by SCP due to certain unhealthy conditions of the host, such as CircuitBreaker, Producer Congestion Control, etc.                                                                                                                                                                                                                                                                                                                                                                                                          |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Dimension   | <ul style="list-style-type: none"> <li>• ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>• ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>• ocscp_nf_end_point (Default value = NA)</li> <li>• ocscp_producer_host (default value = NA, Contains fqdn of producer)</li> <li>• ocscp_authority</li> <li>• ocscp_cause</li> </ul>                                                                                                                                                                                                                                 |
| Example     | <ul style="list-style-type: none"> <li>• ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_nf_type="PCF"}</li> <li>• ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>• ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_cause="CircuitBreaking"}</li> <li>• ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_nf_end_point="NA"}</li> <li>• ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}</li> </ul> |



**Table 5-195 ocscp\_metric\_5gsbi\_rx\_res\_failure\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Tracks the total number of upstream response failures at SCP with a specific cause, such as ConnectionTimeout and UnknownHostException so on.                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Dimension   | <ul style="list-style-type: none"> <li>ocscp_nf_type (e.g., UDM, PCF, AMF, etc.)</li> <li>ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.)</li> <li>ocscp_nf_end_point (Default value = NA)</li> <li>ocscp_response_code(e.g., 201, 503, 404, etc.)</li> <li>ocscp_response_code_class (e.g., 2, 5, etc.)</li> <li>ocscp_authority</li> <li>scheme(e.g., https)</li> <li>ocscp_cause</li> </ul>                                                                                                                                                           |
| Example     | <ul style="list-style-type: none"> <li>ocscp_metric_5gsbi_rx_res_failure_total{ocscp_nf_type="PCF"}</li> <li>ocscp_metric_5gsbi_rx_res_failure_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>ocscp_metric_5gsbi_rx_res_failure_total{scheme="https"}</li> <li>ocscp_metric_5gsbi_rx_res_failure_total{ocscp_nf_end_point="NA"}</li> <li>ocscp_metric_5gsbi_rx_res_failure_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}</li> <li>ocscp_metric_5gsbi_rx_res_failure_total{ocscp_cause="UnknownHostException"}</li> </ul> |

**Table 5-196 ocscp\_configuration\_dnssrv\_nrf\_non\_migration\_task\_failure\_count\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                        |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Indicates the number of failed nonmigrated tasks of the DNS SRV-based NRF Info feature.</p> <p>The nonmigrated tasks are as follows:</p> <ul style="list-style-type: none"> <li>Capacity or priority update of target FQDN</li> <li>New NRF SRV FQDN addition or deletion</li> <li>NF Set update</li> </ul> |
| Type        | Counter                                                                                                                                                                                                                                                                                                        |
| Dimensions  | <ul style="list-style-type: none"> <li>nrfSrvFqdn</li> <li>failureReason</li> </ul>                                                                                                                                                                                                                            |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_failure_count={nrfSrvFqdn="nrf1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_failure_count={failureReason="START_NRF_RULE_PROCESSING"}</li> </ul>                         |

Table 5-197 ocscp\_configuration\_dnssrv\_nrf\_non\_migration\_task\_success\_count\_total

| Field       | Details                                                                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Indicates the number of successful nonmigrated tasks. The nonmigrated tasks are as follows:</p> <ul style="list-style-type: none"> <li>Capacity or priority update of the target FQDN</li> <li>New NRF SRV FQDN addition or deletion</li> <li>NF Set update</li> </ul> |
| Type        | Counter                                                                                                                                                                                                                                                                   |
| Dimensions  | <ul style="list-style-type: none"> <li>nrfSrvFqdn</li> </ul>                                                                                                                                                                                                              |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_success_count_total={nrfSrvFqdn="nrf1svc.scpsvc.svc.cluster.local"}</li> </ul>                                                                                                   |

Table 5-198 ocscp\_configuration\_dnssrv\_nrf\_non\_migration\_task\_failure

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Indicates the status of the nonmigrated task of the DNS SRV based NRF Info feature. The status of nonmigrated tasks will be either 0 or 1.</p> <p>The nonmigrated tasks are as follows:</p> <ul style="list-style-type: none"> <li>Capacity or priority update of target FQDN</li> <li>New NRF SRV FQDN addition or deletion</li> <li>NF Set update</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Dimensions  | <ul style="list-style-type: none"> <li>nrfSrvFqdn</li> <li>failureReason</li> <li>taskId</li> <li>taskName</li> <li>taskState</li> <li>eventName</li> <li>msName</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_failure={nrfSrvFqdn="nrf1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_failure={failureReason="RETRY_EVENT_COUNT_EXPIRED"}</li> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_failure={taskId=1234}</li> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_failure={taskName="NRF_SET_DELETED_TASK"}</li> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_failure={eventName="START_NRF_RULE_PROCESSING"}</li> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_failure={msName="scpc-notification"}</li> <li>ocscp_configuration_dnssrv_nrf_non_migration_task_failure={taskState="UNSUB_DEREG_COMPLETED"}</li> </ul> |

Table 5-199 ocscp\_configuration\_dnssrv\_nrf\_migration\_task\_failure

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>Indicates the status of the migrated task of the DNS SRV based NRF Info feature. The status of migrated tasks will be either 0 or 1.</p> <p>The migrated tasks are as follows:</p> <ul style="list-style-type: none"> <li>Static(custom.values.yaml file) to DNS SRV based NRF migration</li> <li>DNS SRV based NRF to static(custom.values.yaml) migration</li> </ul> <p>If there is any failure in the following migration task, then the value will become 1, otherwise the value will be 0.</p>                                                                                                                                                                                     |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Dimensions  | <ul style="list-style-type: none"> <li>failureReason</li> <li>taskId</li> <li>taskName</li> <li>taskState</li> <li>eventName</li> <li>msName</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_configuration_dnssrv_nrf_migration_task_failure={failureReason=WAIT_TIME_FOR_COMPLETION_RESP_ELAPSED, RETRY_EVENT_COUNT_EXPIRED}</li> <li>ocscp_configuration_dnssrv_nrf_migration_task_failure={taskId=1234}</li> <li>ocscp_configuration_dnssrv_nrf_migration_task_failure={taskName="MIGRATION_OF_NRF_INFO_FROM_STATIC_TO_DNS"}</li> <li>ocscp_configuration_dnssrv_nrf_migration_task_failure={eventName="FEATURE_ENABLED"}</li> <li>ocscp_configuration_dnssrv_nrf_migration_task_failure={msName="scpc-configuration"}</li> <li>ocscp_configuration_dnssrv_nrf_migration_task_failure={taskState="WAITING_FOR_DNS_SRV_DATA"}</li> </ul> |

Table 5-200 ocscp\_configuration\_dnssrv\_nrf\_duplicate\_target\_detected

| Field       | Details                                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates when duplicate target FQDNs are detected across different NRF SRV FQDNs.                                                                                                                                                                                                    |
| Type        | Gauge                                                                                                                                                                                                                                                                                 |
| Dimensions  | <ul style="list-style-type: none"> <li>nrfSrvFqdn</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                      |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_configuration_dnssrv_nrf_duplicate_target_detected={nrfSrvFqdn="nrf1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_configuration_dnssrv_nrf_duplicate_target_detected={ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-201 ocscp\_subscription\_nrf\_deregistration\_success\_total

| Field       | Details                                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of successful deregistrations with NRF.                                                                                                 |
| Type        | Counter                                                                                                                                                      |
| Dimensions  | <ul style="list-style-type: none"> <li>nrfRegionOrSetId</li> </ul>                                                                                           |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_subscription_nrf_deregistration_success_total={nrfRegionOrSetId="setnrf11.nrfset.5gc.mnc012.mcc345"}</li> </ul> |

Table 5-202 ocscp\_subscription\_nrf\_deregistration\_failure\_total

| Field       | Details                                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of failed deregistrations with NRF.                                                                                                     |
| Type        | Counter                                                                                                                                                      |
| Dimensions  | <ul style="list-style-type: none"> <li>nrfRegionOrSetId</li> </ul>                                                                                           |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_subscription_nrf_deregistration_failure_total={nrfRegionOrSetId="setnrf11.nrfset.5gc.mnc012.mcc345"}</li> </ul> |

Table 5-203 ocscp\_worker\_peer\_oci\_conveyance\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of messages routed by SCP with peer NF's Overload Control Information (OCI) header.                                                                                                                                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                               |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_peer_nf_instance_id</li> <li>ocscp_peer_nf_service_type</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                   |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_peer_oci_conveyance_total{ocscp_peer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_peer_oci_conveyance_total{ocscp_peer_nf_service_type="npcf-smpolicycontrol"}</li> <li>ocscp_worker_peer_oci_conveyance_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-204 ocscp\_worker\_oci\_conveyance\_total

| Field       | Details                                                                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of messages routed by SCP with SCP's OCI header.                                                                                                                                                                                    |
| Type        | Counter                                                                                                                                                                                                                                                  |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_peer_nf_instance_id</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                          |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_oci_conveyance_total{ocscp_peer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_oci_conveyance_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-205 ocscp\_worker\_oci\_enforced\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of messages on which OCI is enforced causing those messages to be responded with error or alternate routed.                                                                                                                                                                                                                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_producer_nf_instance_id</li> <li>ocscp_nf_service_type</li> <li>action <ul style="list-style-type: none"> <li>error_sent</li> <li>rerouted</li> </ul> </li> <li>ocscp_smp_priority</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_oci_enforced_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_oci_enforced_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> <li>ocscp_worker_oci_enforced_total{action="rerouted"}</li> <li>ocscp_worker_oci_enforced_total{ocscp_smp_priority="10"}</li> <li>ocscp_worker_oci_enforced_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-206 ocscp\_worker\_rx\_unsupported\_oci\_scope\_total

| Field       | Details                                                                                                                                                                                                                                                                                   |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of messages received with unsupported OCI scope from peer.                                                                                                                                                                                                           |
| Type        | Counter                                                                                                                                                                                                                                                                                   |
| Dimensions  | <ul style="list-style-type: none"> <li>scope</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                               |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_rx_unsupported_oci_scope_total{scope="S-NSSAI: {"sst": 1, "sd": "A08923"}; DNN: internet.mnc012.mcc345.gprs"}</li> <li>ocscp_worker_rx_unsupported_oci_scope_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-207 ocscp\_metric\_nf\_oci\_rx\_total

| Field       | Details                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of messages received with OCI.                                                                                                                                                                                            |
| Type        | Counter                                                                                                                                                                                                                                        |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_peer_nf_instance_id</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_metric_nf_oci_rx_total{ocscp_peer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_metric_nf_oci_rx_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-208 ocscp\_metric\_trafficfeed\_partition\_unhealthy

| Field       | Details                                                                                                                                                                                             |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | No leader is available for Kafka partition.                                                                                                                                                         |
| Type        | Gauge                                                                                                                                                                                               |
| Dimensions  | <ul style="list-style-type: none"> <li>kafka_partition_id</li> <li>topic</li> <li>cause               <ul style="list-style-type: none"> <li>no_leader</li> <li>unreachable</li> </ul> </li> </ul>  |
| Examples    | ocscp_metric_trafficfeed_partition_unhealthy{ocscp_cause="no_leader",ocscp_nf_service_type="nudm-uecm",ocscp_trafficfeed_triggerpoint="requestEgress",kafka_partition_id="NA",kafka_broker_id="NA"} |

Table 5-209 ocscp\_metric\_trafficfeed\_success\_total

| Field       | Details                                                                                                                                                                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of messages sent to traffic feed.<br>This metric is unavailable when "acks" is set to "0".<br>To make it available, change "acks" to "1" or "all".                                                                                         |
| Type        | Counter                                                                                                                                                                                                                                           |
| Dimensions  | <ul style="list-style-type: none"> <li>nfServiceType (e.g. nudm-uecm, nudm-sdm, etc.)</li> <li>triggerpoint (e.g. requestIngress, requestEgress, responseIngress, responseEgress)</li> <li>kafka_partition_id</li> <li>kafka_broker_id</li> </ul> |
| Examples    | ocscp_metric_trafficfeed_success_total{ocscp_nf_service_type="nausf-auth",ocscp_trafficfeed_triggerpoint="requestEgress",kafka_partition_id="NA",kafka_broker_id="NA"}                                                                            |

Table 5-210 ocscp\_metric\_trafficfeed\_cluster\_unhealthy

| Field       | Details                                                             |
|-------------|---------------------------------------------------------------------|
| Description | The whole traffic feed Kafka cluster is down.                       |
| Type        | Gauge                                                               |
| Dimensions  | cause (unreachable)                                                 |
| Examples    | ocscp_metric_trafficfeed_cluster_unhealthy{ocscp_cause=unreachable} |

Table 5-211 ocscp\_ignore\_unknown\_service\_total

| Field       | Details                                                                                             |
|-------------|-----------------------------------------------------------------------------------------------------|
| Description | The total number of unknown services ignored in the NF profile.                                     |
| Type        | Counter                                                                                             |
| Dimensions  | <ul style="list-style-type: none"> <li>nfInstanceId</li> <li>nfType</li> <li>serviceName</li> </ul> |

Table 5-211 (Cont.) ocscp\_ignore\_unknown\_service\_total

| Field    | Details                                                                                                                                                                                                                                                               |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Examples | <ul style="list-style-type: none"> <li>ocscp_ignore_unknown_service_total{nfInstanceId=6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e}</li> <li>ocscp_ignore_unknown_service_total{nfType=UDM}</li> <li>ocscp_ignore_unknown_service_total{serviceName=nudm_unknown}</li> </ul> |

Table 5-212 ocscp\_worker\_ondemand\_discovery\_response\_cache\_skipped\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of discovery responses from NRF to SCP-Worker that are skipped from being cached due to the configured rule (the configured rule is specified by the RuleName dimension).                                                                                                                                                                                                                                                                                                                                                                 |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Dimensions  | <ul style="list-style-type: none"> <li>rule_name</li> <li>ocscp_nf_type</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_ondemand_discovery_response_cache_skipped_total{applicationName="ocscp"}</li> <li>ocscp_worker_ondemand_discovery_response_cache_skipped_total{microservice="scp-worker"}</li> <li>ocscp_worker_ondemand_discovery_response_cache_skipped_total{ocscp_nf_type="PCF"}</li> <li>ocscp_worker_ondemand_discovery_response_cache_skipped_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_worker_ondemand_discovery_response_cache_skipped_total{rule_name="rule2"}</li> </ul> |

Table 5-213 ocscp\_worker\_ondemand\_discovery\_response\_cache\_added\_total

| Field       | Details                                                                                                                                                                                                                                                     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of discovery responses from NRF to SCP-Worker that are cached.                                                                                                                                                                             |
| Type        | Counter                                                                                                                                                                                                                                                     |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                         |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_ondemand_discovery_response_cache_added_total{applicationName="ocscp",microservice="scp-worker",ocscp_nf_type="PCF",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle",}</li> </ul> |

Table 5-214 ocscp\_worker\_ondemand\_discovery\_response\_cache\_removed\_total

| Field       | Details                                                                                                                                      |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of discovery responses from NRF to SCP-Worker that were removed from the cache either due to expiry time or queue overflow. |
| Type        | Counter                                                                                                                                      |

Table 5-214 (Cont.) ocscp\_worker\_ondemand\_discovery\_response\_cache\_removed\_total

| Field      | Details                                                                                                                                                                                                                                                       |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_fqdn</li> </ul>                                                                                                                                                                           |
| Examples   | <ul style="list-style-type: none"> <li>ocscp_worker_ondemand_discovery_response_cache_removed_total{applicationName="ocscp",microservice="scp-worker",ocscp_nf_type="PCF",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle",}</li> </ul> |

Table 5-215 ocscp\_nrfproxy\_ondemand\_discovery\_response\_cache\_skipped\_total

| Field       | Details                                                                                                                                                                                   |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of discovery responses from NRF to nrf-proxy that are skipped from being cached due to the configured rule (the configured rule is specified by the RuleName dimension). |
| Type        | Counter                                                                                                                                                                                   |
| Dimensions  | <ul style="list-style-type: none"> <li>rule_name</li> <li>ocscp_producer_nf_type</li> </ul>                                                                                               |
| Examples    | ocscp_nrfproxy_ondemand_discovery_response_cache_skipped_total{microservice="scp-nrfproxy",ocscp_producer_nf_type="PCF",rule_name="rule1",}                                               |

Table 5-216 ocscp\_nrfproxy\_ondemand\_discovery\_response\_cache\_added\_total

| Field       | Details                                                                                                                |
|-------------|------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of discovery responses from NRF to nrf-proxy that are cached.                                         |
| Type        | Counter                                                                                                                |
| Dimensions  | ocscp_producer_nf_type                                                                                                 |
| Examples    | ocscp_nrfproxy_ondemand_discovery_response_cache_added_total{microservice="scp-nrfproxy",ocscp_producer_nf_type="PCF"} |

Table 5-217 ocscp\_nrfproxy\_ondemand\_discovery\_response\_cache\_removed\_total

| Field       | Details                                                                                                                                     |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of discovery responses from NRF to nrf-proxy that were removed from the cache either due to expiry time or queue overflow. |
| Type        | Counter                                                                                                                                     |
| Dimensions  | ocscp_producer_nf_type                                                                                                                      |
| Examples    | ocscp_nrfproxy_ondemand_discovery_response_cache_removed_total{microservice="scp-nrfproxy",ocscp_producer_nf_type="PCF"}                    |

Table 5-218 ocscp\_worker\_problemdetails\_details\_maxlengthexceeded\_total

| Field       | Details                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of messages for which the ProblemDetails.detail parameter in the error response exceeded the configured value for errorDetailMaxSize in SCP Features REST API for enhanced_error_rsp configuration. |
| Type        | Counter                                                                                                                                                                                                    |



Table 5-218 (Cont.) ocscp\_worker\_problemdetails\_details\_maxlengthexceeded\_total

| Field      | Details                                                                                                                                                                                                                                                                               |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions | ocscp_attempted_producers                                                                                                                                                                                                                                                             |
| Examples   | ocscp_worker_problemdetails_details_maxlengthexceeded_total{applicationName="ocscp",microservice="scp-worker",ocscp_attempted_producers="[udm1svc.scpsvc.svc.cluster.local,udm2svc.scpsvc.svc.cluster.local]",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle"} |

Table 5-219 ocscp\_worker\_object\_pool\_in\_use\_objects

| Field       | Details                                                                                 |
|-------------|-----------------------------------------------------------------------------------------|
| Description | The total number of pool objects currently in use.                                      |
| Type        | Gauge                                                                                   |
| Dimensions  | ocscp_object_pool_name                                                                  |
| Examples    | ocscp_worker_object_pool_in_use_objects{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL} |

Table 5-220 ocscp\_worker\_object\_pool\_ready\_to\_use\_objects

| Field       | Details                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------|
| Description | The total number of pool objects present in the pool is ready to be used.                     |
| Type        | Gauge                                                                                         |
| Dimensions  | ocscp_object_pool_name                                                                        |
| Examples    | ocscp_worker_object_pool_ready_to_use_objects{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL} |

Table 5-221 ocscp\_worker\_object\_pool\_created\_objects

| Field       | Details                                                                                  |
|-------------|------------------------------------------------------------------------------------------|
| Description | The total number of pool objects created.                                                |
| Type        | Gauge                                                                                    |
| Dimensions  | ocscp_object_pool_name                                                                   |
| Examples    | ocscp_worker_object_pool_created_objects{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL} |

Table 5-222 ocscp\_metric\_http\_egress\_res\_total

| Field       | Details                                                                                                                                                                                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of egress 5G SBI responses from SCP, including 5G SBI service responses, notification responses, and SCP health check response messages.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP. |
| Type        | Counter                                                                                                                                                                                                                                                                                                      |
| Dimensions  | NA                                                                                                                                                                                                                                                                                                           |

Table 5-222 (Cont.) ocscp\_metric\_http\_egress\_res\_total

| Field    | Details                                                                                                                                                      |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Examples | ocscp_metric_http_egress_res_total{applicationName="ocscp",microservice="scp-worker",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle"} |

Table 5-223 ocscp\_metric\_http\_ingress\_req\_total

| Field       | Details                                                                                                                                                                                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of ingress 5G SBI requests at SCP includes 5G SBI service requests, notification requests, and SCP health check request messages.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP. |
| Type        | Counter                                                                                                                                                                                                                                                                                               |
| Dimensions  | NA                                                                                                                                                                                                                                                                                                    |
| Examples    | ocscp_metric_http_ingress_req_total{applicationName="ocscp",microservice="scp-worker",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle"}                                                                                                                                         |

Table 5-224 ocscp\_worker\_object\_pool\_denied\_total

| Field       | Details                                                                               |
|-------------|---------------------------------------------------------------------------------------|
| Description | The total count of pool objects denied once MAX_POOL_SIZE is reached.                 |
| Type        | Counter                                                                               |
| Dimensions  | NA                                                                                    |
| Examples    | ocscp_worker_object_pool_denied_total{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL} |

Table 5-225 ocscp\_worker\_object\_pool\_tran\_timeout\_objects\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                          |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total counts of pool objects getting total transaction timeouts during different async transaction states in the callflow.                                                                                                                                                                                                                                   |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                          |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_object_pool_name</li> <li>ocscp_worker_client_name</li> <li>ocscp_object_trans_state</li> </ul>                                                                                                                                                                                                                     |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_object_pool_tran_timeout_objects_total{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL}</li> <li>ocscp_worker_object_pool_tran_timeout_objects_total{ocscp_worker_client_name=NRF_PROXY_CLIENT}</li> <li>ocscp_worker_object_pool_tran_timeout_objects_total{ocscp_object_trans_state=ON_PROGRESS}</li> </ul> |

Table 5-226 ocscp\_worker\_object\_pool\_clash\_in\_callback\_total

| Field       | Details                                                                                                                     |
|-------------|-----------------------------------------------------------------------------------------------------------------------------|
| Description | The total counts of pool objects getting clashed due to an unexpected async flow sequence conflict or usage time ambiguity. |

Table 5-226 (Cont.) ocscp\_worker\_object\_pool\_clash\_in\_callback\_total

| Field      | Details                                                                                                                                                                                                                                                                                                                                |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type       | Counter                                                                                                                                                                                                                                                                                                                                |
| Dimensions | <ul style="list-style-type: none"> <li>ocscp_object_pool_name</li> <li>ocscp_worker_client_name</li> <li>clash_type</li> </ul>                                                                                                                                                                                                         |
| Examples   | <ul style="list-style-type: none"> <li>ocscp_worker_object_pool_clash_in_callback_total{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL}</li> <li>ocscp_worker_object_pool_clash_in_callback_total{ocscp_worker_client_name=NRF_PROXY_CLIENT}</li> <li>ocscp_worker_object_pool_clash_in_callback_total{clash_type = BY_SEQ}</li> </ul> |

Table 5-227 ocscp\_metric\_message\_current\_request\_rate\_total

| Field       | Details                                                                                                                                                                                                                                                                |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of current request rate per rate limit bucket key.                                                                                                                                                                                                    |
| Type        | Counter                                                                                                                                                                                                                                                                |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_fqdn</li> <li>bucketKey</li> </ul>                                                                                                                                                                                        |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_metric_message_current_request_rate_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</li> <li>ocscp_metric_message_current_request_rate_total{bucketKey="egress_pcf1svc.ny-ocscp-01.svc.thrust2"}</li> </ul> |

Table 5-228 coherence\_cache\_hits

| Field       | Details                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of cache hits since the last statistics reset. A cache hit refers to a read operation invocation for which an entry exists in this map. |
| Type        | Counter                                                                                                                                                  |
| Dimensions  | <ul style="list-style-type: none"> <li>coherenceCluster</li> <li>name (cache name)</li> </ul>                                                            |
| Examples    | coherence_cache_hits{coherenceCluster="scp-coherence-cluster"}                                                                                           |

Table 5-229 coherence\_cache\_size

| Field       | Details                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------|
| Description | The total number of entries in cache.                                                         |
| Type        | Counter                                                                                       |
| Dimensions  | <ul style="list-style-type: none"> <li>coherenceCluster</li> <li>name (cache name)</li> </ul> |
| Examples    | coherence_cache_size{coherenceCluster="scp-coherence-cluster"}                                |

Table 5-230 ocscp\_worker\_https\_ingress\_connection\_success\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric will be pegged upon the successful establishment of an Ingress HTTPS connection.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.                                                                           |
| Type        | Counter                                                                                                                                                                                                                                                                                                                   |
| Dimensions  | <ul style="list-style-type: none"> <li>• tls_version</li> <li>• source</li> <li>• destination</li> </ul>                                                                                                                                                                                                                  |
| Examples    | <ul style="list-style-type: none"> <li>• ocscp_worker_https_ingress_connection_success_total{tls_version="TLSv1.3"}</li> <li>• ocscp_worker_https_ingress_connection_success_total{source="192.168.219.122"}</li> <li>• ocscp_worker_https_ingress_connection_success_total{destination="192.168.219.88:9443"}</li> </ul> |

Table 5-231 ocscp\_worker\_https\_ingress\_connection\_failure\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric will be pegged by Ingress connection failures, where failure refers to the inability to establish a connection due to handshake failure.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.                                                                                                                                                                                                                  |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Dimensions  | <ul style="list-style-type: none"> <li>• failureReason</li> <li>• tls_version</li> <li>• source</li> <li>• destination</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                        |
| Examples    | <ul style="list-style-type: none"> <li>• ocscp_worker_https_ingress_connection_failure_total{destination="192.168.219.88:9443"}</li> <li>• ocscp_worker_https_ingress_connection_failure_total{tls_version="TLSv1.3"}</li> <li>• ocscp_worker_https_ingress_connection_failure_total{source="192.168.219.122"}</li> <li>• ocscp_worker_https_ingress_connection_failure_total{ failureReason="TLS Handshake failed. Reason: Client requested protocol TLSv1.2 is not enabled or supported in server context"}</li> </ul> |

Table 5-232 ocscp\_worker\_https\_egress\_connection\_success\_total

| Field       | Details                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric will be pegged upon the successful establishment of an egress HTTPS connection.<br><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP. |
| Type        | Counter                                                                                                                                                                                                                                        |
| Dimensions  | <ul style="list-style-type: none"> <li>• tls_version</li> <li>• destination</li> </ul>                                                                                                                                                         |

Table 5-232 (Cont.) ocscp\_worker\_https\_egress\_connection\_success\_total

| Field    | Details                                                                                                                                                                                                                   |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Examples | <ul style="list-style-type: none"> <li>ocscp_worker_https_egress_connection_success_total{tls_version="TLSv1.3"}</li> <li>ocscp_worker_https_egress_connection_success_total{destination="10.98.212.210:8443"}</li> </ul> |

Table 5-233 ocscp\_worker\_https\_egress\_connection\_failure\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>This metric will be pegged in the case of egress HTTPS connection failures. Here, failure refers to the inability to establish a connection due to handshake failure.</p> <p><b>Note:</b> Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                                             |
| Dimensions  | <ul style="list-style-type: none"> <li>failureReason</li> <li>tls_version</li> <li>destination</li> </ul>                                                                                                                                                                                                                           |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_https_egress_connection_failure_total{tls_version="TLSv1.3"}</li> <li>ocscp_worker_https_egress_connection_failure_total{destination="10.98.212.210:8443"}</li> <li>ocscp_worker_https_egress_connection_failure_total{failureReason="certificate expired"}</li> </ul>          |

Table 5-234 ocscp\_worker\_5gsbi\_upstream\_connect\_failure\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged when an upstream connection with a producer NF fails.                                                                                                                                                                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                                                  |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_producer_host (default value = unkown, Contains fqdn of producer)</li> <li>ocscp_nf_end_point (default value =unkown, Contains IPAddress and Port of producer)</li> </ul>                                                                                                                                                   |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_5gsbi_upstream_connect_failure_total{ocscp_nf_end_point="10.233.19.102:8080",ocscp_producer_host="udm1svc.scpsvc.svc.cluster.local"}</li> <li>ocscp_worker_5gsbi_upstream_connect_failure_total{ocscp_nf_end_point="[fd00:0:0:2:0:0:0:6978]:8080",ocscp_producer_host="udm1svc.scpsvc.svc.cluster.local"}</li> </ul> |

Table 5-235 ocscp\_nrfproxy\_oauth\_queue\_alert

| Field       | Details                                                                                                                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged when the metric value is either 0 or 1. If the severity reaches Minor, Major, or Critical, the value is 1, else 0.                                                                                                                                                                 |
| Type        | Gauge                                                                                                                                                                                                                                                                                                    |
| Dimensions  | <ul style="list-style-type: none"> <li>queueName: name of the queue (accessTokenCohEvExecutorQueue, accessTokenAppEvExecutorQueue, scpUpstreamExecutorQueue, scpDownstreamExecutorQueue)</li> <li>queueCapacity: The maximum size of queue is 10000</li> <li>severity: CRITICAL, MAJOR, MINOR</li> </ul> |

Table 5-235 (Cont.) ocscp\_nrfproxy\_oauth\_queue\_alert

| Field    | Details                                                                                                                                                                                                                         |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Examples | <ul style="list-style-type: none"> <li>ocscp_nrfproxy_oauth_queue_alert{severity="CRITICAL"}</li> <li>ocscp_nrfproxy_oauth_queue_alert{severity="MAJOR"}</li> <li>ocscp_nrfproxy_oauth_queue_alert{severity="MINOR"}</li> </ul> |

Table 5-236 ocscp\_worker\_pod\_overload\_control\_cpu\_utilization\_total

| Field       | Details                                                                                |
|-------------|----------------------------------------------------------------------------------------|
| Description | This metric is pegged when the CPU threshold exceeds the configured overload levels.   |
| Type        | Counter                                                                                |
| Dimensions  | ocscp_threshold_level                                                                  |
| Examples    | ocscp_worker_pod_overload_control_cpu_utilization_total{ocscp_threshold_level="MINOR"} |

Table 5-237 ocscp\_worker\_self\_oci\_above\_oci\_conveyance\_threshold\_total

| Field       | Details                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------|
| Description | This metric is pegged when SCP's load exceeds the configured load for self OCI conveyance.       |
| Type        | Counter                                                                                          |
| Dimensions  | ocscp_oci_threshold_level                                                                        |
| Examples    | ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_threshold_level="CRITICAL"} |

Table 5-238 ocscp\_worker\_outstanding\_requests

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric tracks the number of requests for which SCP is waiting for a response after routing to the upstream peer. It will be pegged regardless of whether Circuit Breaker (CB) is enabled or not.                                                                                                                                                                                                                            |
| Type        | Gauge                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_producer_host</li> <li>ocscp_nf_service_type</li> <li>ocscp_nf_id</li> <li>ocscp_locality</li> </ul>                                                                                                                                                                                                                                                                                |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_worker_outstanding_requests{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_worker_outstanding_requests{ocscp_nf_service_type="nudm-uecm"}</li> <li>ocscp_worker_outstanding_requests{ocscp_nf_id="2fbf1bbc-6e4b-3994-b507-b14ef8e1bc51#f86b54b7-aef9-4c78-b346-3bfb7f380811"}</li> <li>ocscp_worker_outstanding_requests{ocscp_locality="Loc7"}</li> </ul> |

Table 5-239 ocscp\_nrfproxy\_ondemand\_discovery\_cache\_notif\_local\_refresh\_total

| Field       | Details                                                                                                                                                                                                           |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged at the scp-nrfproxy when the received NF profile causes the cache at scp-nrfproxy to be updated locally.                                                                                    |
| Type        | Counter                                                                                                                                                                                                           |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_producer_nf_instance_id</li> <li>ocscp_producer_service_instance_id</li> </ul>                                                                                       |
| Examples    | ocscp_nrfproxy_ondemand_discovery_cache_notif_local_refresh_total{ocscp_producer_nf_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27",ocscp_producer_service_instance_id="8faf1bbc-6e4a-4454-a507-aef01a101a33"} |

Table 5-240 ocscp\_nrfproxy\_ondemand\_discovery\_cache\_invalid\_notif\_nrf\_refresh\_total

| Field       | Details                                                                                                                                                                                                                 |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged at the scp-nrfproxy when the received NF profile causes a cache record at scp-nrfproxy to be marked as invalid.                                                                                   |
| Type        | Counter                                                                                                                                                                                                                 |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_producer_nf_instance_id</li> <li>ocscp_producer_service_instance_id</li> </ul>                                                                                             |
| Examples    | ocscp_nrfproxy_ondemand_discovery_cache_invalid_notif_nrf_refresh_total{ocscp_producer_nf_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27",ocscp_producer_service_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27"} |

Table 5-241 ocscp\_worker\_ondemand\_discovery\_cache\_notif\_local\_refresh\_total

| Field       | Details                                                                                                                                                                                                         |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged at the scp-worker when the received NF profile causes a cache record at the scp-worker to be updated locally.                                                                             |
| Type        | Counter                                                                                                                                                                                                         |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_producer_nf_instance_id</li> <li>ocscp_producer_service_instance_id</li> </ul>                                                                                     |
| Examples    | ocscp_worker_ondemand_discovery_cache_notif_local_refresh_total{ocscp_producer_nf_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27",ocscp_producer_service_instance_id="8faf1bbc-6e4a-4454-a507-aef01a101a11"} |

Table 5-242 ocscp\_worker\_ondemand\_discovery\_cache\_invalid\_notif\_nrf\_refresh\_total

| Field       | Details                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged at the scp-worker when the received NF profile causes a cache record at the scp-worker to be marked as invalid. |
| Type        | Counter                                                                                                                               |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_producer_nf_instance_id</li> <li>ocscp_producer_service_instance_id</li> </ul>           |

Table 5-242 (Cont.) ocscp\_worker\_ondemand\_discovery\_cache\_invalid\_notif\_nrf\_refresh\_total

| Field    | Details                                                                                                                                                                                                               |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Examples | ocscp_worker_ondemand_discovery_cache_invalid_notif_nrf_refresh_total{ocscp_producer_nf_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27",ocscp_producer_service_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27"} |

Table 5-243 ocscp\_nrfproxy\_ondemand\_discovery\_cache\_nrf\_refreshed\_status\_total

| Field       | Details                                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged at scp-nrfproxy when the invalid cache entry is refreshed after getting a discovery response from the NRF. |
| Type        | Counter                                                                                                                          |
| Dimensions  | <ul style="list-style-type: none"> <li>refresh_status</li> <li>ocscp_response_code</li> </ul>                                    |
| Examples    | ocscp_nrfproxy_ondemand_discovery_cache_nrf_refreshed_status_total{refresh_status="Success",ocscp_response_code="200"}           |

Table 5-244 ocscp\_worker\_ondemand\_discovery\_cache\_nrf\_refreshed\_status\_total

| Field       | Details                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged at scp-worker when the invalid cache entry is refreshed upon receiving a discovery response from the NRF. |
| Type        | Counter                                                                                                                         |
| Dimensions  | <ul style="list-style-type: none"> <li>refresh_status</li> <li>ocscp_response_code</li> </ul>                                   |
| Examples    | ocscp_worker_ondemand_discovery_cache_nrf_refreshed_status_total{ocscp_response_code="200",refresh_status="Success"}            |

Table 5-245 ocscp\_worker\_transaction\_time\_exhausted\_total

| Field       | Details                                                                                                                                                                                                   |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric indicates that the available time for SCP to further process a given request has exhausted at the scp-worker, based on the timestamp headers.                                                 |
| Type        | Counter                                                                                                                                                                                                   |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_producer_host</li> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_consumer_info</li> <li>ocscp_fqdn</li> <li>ocscp_timeout_point</li> </ul> |



Table 5-245 (Cont.) ocscp\_worker\_transaction\_time\_exhausted\_total

| Field    | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Examples | <ul style="list-style-type: none"> <li>ocscp_worker_transaction_time_exhausted_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_worker_transaction_time_exhausted_total{ocscp_nf_type="UDM"}</li> <li>ocscp_worker_transaction_time_exhausted_total{ocscp_consumer_info="AMF#s3g1svc.scpsvc.svc.cluster.local#6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> <li>ocscp_worker_transaction_time_exhausted_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",ocscp_nf_type="UDM",ocscp_producer_host="udm1svc.default.svc.cluster.local"}</li> <li>ocscp_worker_transaction_time_exhausted_total{ocscp_timeout_point="NRF_PROXY"}</li> </ul> <p><b>Note:</b> ocscp_consumer_info = (ocscp_consumer_nf_type#ocscp_consumer_host#ocscp_consumer_nf_instance_id)</p> |

Table 5-246 ocscp\_worker\_timestamp\_headers\_validation\_fail\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                                        |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>This metric indicates the number of requests received with either invalid timestamp header values (for example, an invalid 3gpp-Sbi-Max-Rsp-Time header value) or invalid combinations of timestamp headers, but still processed by SCP.</p> <p><b>Note:</b> SCP continues to route such requests using the configured routing options.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                                                        |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_producer_host</li> <li>ocscp_nf_type</li> <li>ocscp_nf_service_type</li> <li>ocscp_consumer_info</li> <li>ocscp_fqdn</li> <li>ocscp_validation_failure</li> </ul>                                                                                                                                 |
| Examples    | ocscp_worker_timestamp_headers_validation_fail_total{ocscp_nf_service_type="npcf-smpolicycontrol", ocscp_validation_failure="INVALID_HDR_COMBINATION"}                                                                                                                                                                                         |

Table 5-247 ocscp\_nrfproxy\_transaction\_time\_exhausted\_total

| Field       | Details                                                                                                                                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric indicates that the available time for SCP to further process a given request has exhausted at the nrf-proxy service, based on the timestamp headers.                                                                                                                                                              |
| Type        | Counter                                                                                                                                                                                                                                                                                                                       |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_consumer_nf_type</li> <li>ocscp_producer_nf_type</li> <li>ocscp_nf_service_type</li> </ul>                                                                                                                                                                                       |
| Examples    | <ul style="list-style-type: none"> <li>ocscp_nrfproxy_transaction_time_exhausted_total{ocscp_consumer_nf_type="AMF"}</li> <li>ocscp_nrfproxy_transaction_time_exhausted_total{ocscp_producer_nf_type="PCF"}</li> <li>ocscp_nrfproxy_transaction_time_exhausted_total{ocscp_nf_service_type="npcf-smpolicycontrol"}</li> </ul> |

**Table 5-248 ocscp\_oauth\_transaction\_time\_exhausted\_total**

| Field       | Details                                                                                                                                                                |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This metric indicates that the available time for SCP to further process a given request has exhausted at the nrf-proxy-oauth service, based on the timestamp headers. |
| Type        | Counter                                                                                                                                                                |
| Dimensions  | <ul style="list-style-type: none"> <li>ocscp_requester_nfType</li> <li>ocscp_target_nfType</li> </ul>                                                                  |
| Examples    | ocscp_oauth_transaction_time_exhausted_total{ocscp_requester_nfType="AMF", ocscp_target_nfType="PCF"}                                                                  |

**Table 5-249 ocscp\_worker\_med\_udv\_read\_failure\_total**

| Field                                                          | Details                                                                                                                            |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | This metric indicates that the read, access, or decode of user-defined variables in mediation has failed.                          |
| Type                                                           | Counter                                                                                                                            |
| Dimension                                                      | <ul style="list-style-type: none"> <li>ocscp_mediation_triggerpoint</li> <li>ocscp_mediation_udv_name</li> </ul>                   |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_worker_med_udv_read_failure_total{ocscp_mediation_triggerpoint="requestIngress",ocscp_mediation_udv_name="userDefined-var2"} |

**Table 5-250 ocscp\_worker\_med\_udv\_usage\_count\_limit\_exceeded\_total**

| Field                                                          | Details                                                                                                                                                                                       |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | This metric indicates that the count of user-defined variables in mediation for a particular transaction exceeds the configured maximum usage limit for a single transaction.                 |
| Type                                                           | Counter                                                                                                                                                                                       |
| Dimension                                                      | <ul style="list-style-type: none"> <li>ocscp_mediation_udv_max_usage_limit</li> <li>ocscp_mediation_triggerpoint</li> <li>ocscp_nf_type_nf_service_type</li> </ul>                            |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_worker_med_udv_usage_count_limit_exceeded_total{ocscp_mediation_triggerpoint="requestIngress",ocscp_mediation_udv_max_usage_limit="5",ocscp_nf_type_and_nf_service_type="UDM-nudm-sdm"} |

**Table 5-251 ocscp\_worker\_routing\_options\_selected\_total**

| Field       | Details                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------|
| Description | This metric indicates the number of requests matching with the specific Routing Options configuration. |
| Type        | Counter                                                                                                |

**Table 5-251 (Cont.) ocscp\_worker\_routing\_options\_selected\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension                                                      | <ul style="list-style-type: none"> <li>producer_nf_info</li> <li>message_info<br/>This dimension contains three sections: <ul style="list-style-type: none"> <li>Message type</li> <li>Method</li> <li>Notification type. (This is applicable only for notification messages. When notification type is empty or '*', append "NA" to this field.)</li> </ul> </li> <li>consumer_nf_info</li> <li>api_specific_resource_uri</li> <li>routing_options_config</li> <li>ocscp_authority</li> </ul>                                                                                                                      |
| Example usage to filter metric by dimension on the Grafana GUI | <ul style="list-style-type: none"> <li>ocscp_worker_routing_options_selected_total{producer_nf_info="UDM-nudm-uecm"}</li> <li>ocscp_worker_routing_options_selected_total{message_info="svc-request-message-PUT"}</li> <li>ocscp_worker_routing_options_selected_total{consumer_nf_info="AMF"}</li> <li>ocscp_worker_routing_options_selected_total{api_specific_resource_uri="NA"}</li> <li>ocscp_worker_routing_options_selected_total{routing_options_config="configsetname1"}</li> <li>ocscp_worker_routing_options_selected_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}</li> </ul> |

**Table 5-252 ocscp\_notification\_duplicate\_profile\_detected\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | <p>This metric indicates whether SCP has received any duplicate SCP or NRF instanceID for another nfType. This metric is pegged when:</p> <ul style="list-style-type: none"> <li>Notification is received with NFProfile with self SCP's NFInstance Id.</li> <li>Notification is received with NFProfile with configured NRF's NFInstance Id.</li> </ul> |
| Type                                                           | Counter                                                                                                                                                                                                                                                                                                                                                  |
| Dimension                                                      | <ul style="list-style-type: none"> <li>receivedNfType</li> <li>duplicateWithNfType</li> <li>nfInstanceId</li> </ul>                                                                                                                                                                                                                                      |
| Example usage to filter metric by dimension on the Grafana GUI | <ul style="list-style-type: none"> <li>ocscp_notification_duplicate_profile_detected_total{receivedNfType="PCF"}</li> <li>ocscp_notification_duplicate_profile_detected_total{duplicateWithNfType="SCP"}</li> <li>ocscp_notification_duplicate_profile_detected_total{nfInstanceId="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}</li> </ul>                    |

**Table 5-253 ocscp\_worker\_pod\_overload\_control\_pending\_transaction\_total**

| Field                                                          | Details                                                                                          |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Description                                                    | This metric is pegged when the pending transaction overload threshold is above the normal level. |
| Type                                                           | Counter                                                                                          |
| Dimension                                                      | ocscp_threshold_level                                                                            |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_worker_pod_overload_control_pending_transaction_total{ocscp_threshold_level="MINOR"}       |

**Table 5-254 ocscp\_configuration\_rejected\_request\_total**

| Field                                                          | Details                                                                                                           |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Description                                                    | This metric is pegged when the number of requests to the Configuration service exceeds the configured rate limit. |
| Type                                                           | Counter                                                                                                           |
| Dimension                                                      | cause                                                                                                             |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_configuration_rejected_request_total{cause="TOO_MANY_REQUESTS"}                                             |

**Table 5-255 ocscp\_notification\_nf\_profile\_rejected\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | <p>This metric is pegged in the following scenarios:</p> <ul style="list-style-type: none"> <li>When the number of NF Profile notifications to the scpc-notification service from NRF exceeds the configured rate limit.</li> <li>When the notification queue reaches its maximum capacity.</li> <li>When an internal exception occurs while adding notified NF Profile to notification queue.</li> </ul> |
| Type                                                           | Counter                                                                                                                                                                                                                                                                                                                                                                                                   |
| Dimension                                                      | cause                                                                                                                                                                                                                                                                                                                                                                                                     |
| Example usage to filter metric by dimension on the Grafana GUI | <ul style="list-style-type: none"> <li>ocscp_notification_nf_profile_rejected_total{cause="MSG_RATE_EXCEEDED"}</li> <li>ocscp_notification_nf_profile_rejected_total{cause="QUEUE_FULL"}</li> <li>ocscp_notification_nf_profile_rejected_total{cause="INTERNAL_ERROR"}</li> <li>ocscp_notification_nf_profile_rejected_total{cause="MANDATORY_PARAM_MISSING"}</li> </ul>                                  |

**Table 5-256 ocscp\_worker\_object\_pool\_uuid\_conflict\_total**

| Field       | Details                                                                                                        |
|-------------|----------------------------------------------------------------------------------------------------------------|
| Description | This metric is pegged when there is reuse of transaction context, which is either cleaned or currently in use. |
| Type        | Counter                                                                                                        |

**Table 5-256 (Cont.) ocscp\_worker\_object\_pool\_uuid\_conflict\_total**

| Field                                                          | Details                                                                                                                                                                             |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension                                                      | <ul style="list-style-type: none"> <li>ocscp_object_pool_name</li> <li>ocscp_worker_client_name</li> <li>operation_type</li> </ul>                                                  |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_worker_object_pool_uuid_conflict_total{ocscp_object_pool_name="STREAM_INFO_OBJECT_POOL",ocscp_worker_client_name="addRequestTotalTimeoutHandler"operation_type="BY_CONFLICT"} |

**Table 5-257 ocscp\_worker\_object\_pool\_operation\_failure\_total**

| Field                                                          | Details                                                                                                                                                                                                                       |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | This metric is pegged when there is an object pool state operation failure.                                                                                                                                                   |
| Type                                                           | Counter                                                                                                                                                                                                                       |
| Dimension                                                      | <ul style="list-style-type: none"> <li>ocscp_object_pool_name</li> <li>ocscp_worker_client_name</li> <li>operation_type</li> <li>ocscp_object_status_code</li> </ul>                                                          |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_worker_object_pool_operation_failure_total{ocscp_object_pool_name="STREAM_INFO_OBJECT_POOL",ocscp_worker_client_name="DestForwardClient::destCallback",operation_type="POST_ACR", ocscp_object_status_code="OP_DENIED"} |

**Table 5-258 ocscp\_worker\_rx\_notification\_req\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | This metric indicates the total number of notification requests received by SCP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Type                                                           | Counter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Dimension                                                      | <ul style="list-style-type: none"> <li>ocscp_nf_type</li> <li>ocscp_notification_type</li> <li>ocscp_rbh_present</li> <li>ocscp_rbh_svc_name_present</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Example usage to filter metric by dimension on the Grafana GUI | <ul style="list-style-type: none"> <li>ocscp_worker_rx_notification_req_total {ocscp_notification_type="EXPLICIT_NOTIFICATION", ocscp_rbh_present="true", ocscp_rbh_svc_name_present="false"}</li> <li>ocscp_worker_rx_notification_req_total {ocscp_nf_type="UDM", ocscp_rbh_present="true", ocscp_rbh_svc_name_present="false"}</li> <li>ocscp_worker_rx_notification_req_total {ocscp_rbh_present="true"}</li> <li>ocscp_worker_rx_notification_req_total {ocscp_notification_type="EXPLICIT_NOTIFICATION", ocscp_nf_type="NA", ocscp_rbh_present="false", ocscp_rbh_svc_name_present="false"}</li> </ul> |

**Table 5-259 ocscp\_notification\_nf\_profiles\_count**

| Field       | Details                                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Indicates the number of NF profiles received by SCP.                                                                                                 |
| Type        | Gauge                                                                                                                                                |
| Dimension   | <ul style="list-style-type: none"> <li>nftype (for example, UDM, AMF)</li> <li>nfStatus(for example, REGISTERED/SUSPENDED/UNDISCOVERABLE)</li> </ul> |

**Table 5-259 (Cont.) ocscp\_notification\_nf\_profiles\_count**

| Field                                                          | Details                                                                                                                                                                   |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example usage to filter metric by dimension on the Grafana GUI | <ul style="list-style-type: none"> <li>ocscp_notification_nf_profiles_count{nftype="UDM"}</li> <li>ocscp_notification_nf_profiles_count{nfStatus="REGISTERED"}</li> </ul> |

**Table 5-260 ocscp\_worker\_pod\_cpu\_load**

| Field                                                          | Details                                                                                                                                             |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Indicates SCP-Worker pod CPU load.                                                                                                                  |
| Type                                                           | Gauge                                                                                                                                               |
| Dimension                                                      | <ul style="list-style-type: none"> <li>applicationName</li> <li>ocscp_fqdn</li> <li>vendor</li> </ul>                                               |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_worker_pod_cpu_load{applicationName="ocscp",microservice="scp-worker",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle"} |

**Table 5-261 ocscp\_metric\_notif\_to\_worker\_data\_fetching\_time\_total**

| Field                                                          | Details                                                                                                                                                                                                       |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Records the routing rule data fetching time from SCPC-Notification to SCP-Worker into the time buckets, for example, 150ms, 300ms, 450s, 600ms, >600ms.                                                       |
| Type                                                           | Counter                                                                                                                                                                                                       |
| Dimension                                                      | ocscp_processing_time (for example, 150ms, 300ms, 450s, 600ms, >600ms)                                                                                                                                        |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_metric_notif_to_worker_data_fetching_time_total{applicationName="ocscp",microservice="scp-worker",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",ocscp_processing_time="150ms",vendor="Oracle"} |

**Table 5-262 ocscp\_audit\_completion\_time\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Captures the audit process completion time into the time buckets, for example, 150 ms, 300 ms, 450 ms, 600 ms, and more than 600 ms.                                                                                                                                                               |
| Type                                                           | Counter                                                                                                                                                                                                                                                                                            |
| Dimension                                                      | <ul style="list-style-type: none"> <li>processingTime(for example, 150 ms, 300 ms, 450 ms, 600 ms, ....&gt;5m)</li> <li>audit_type('Scheduled' or 'On-demand')</li> <li>nrfRegionOrSetId</li> </ul>                                                                                                |
| Example usage to filter metric by dimension on the Grafana GUI | <ul style="list-style-type: none"> <li>ocscp_audit_completion_time_total{auditType="scheduled",nrfRegionOrSetId="ALL",processingTime="16s"}</li> <li>ocscp_audit_completion_time_total{auditType="scheduled",nrfRegionOrSetId="setnrf11.nrfset.5gc.mnc012.mcc345",processingTime="16s"}</li> </ul> |

**Table 5-263 ocscp\_notification\_db\_read\_time\_total**

| Field       | Details                                                                                                                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Captures the time taken to fetch NF profile data between the database and the notification microservice into time buckets, for example, 150 ms, 300 ms, 450 ms, 600 ms, and more than 600 ms. |

**Table 5-263 (Cont.) ocscp\_notification\_db\_read\_time\_total**

| Field                                                          | Details                                                                  |
|----------------------------------------------------------------|--------------------------------------------------------------------------|
| Type                                                           | Counter                                                                  |
| Dimension                                                      | processingTimeInMs(for example, 150 ms, 300 ms, 450 ms, 600 ms, >600 ms) |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_metric_notification_db_read_time_total{processingTimeInMs="150ms"} |

## 5.2.2 Mediation Metrics

The following table describes metric supported by the Mediation feature:

**Table 5-264 ocscp\_med\_total\_rule\_count**

| Field                                                          | Details                                                                                                                                                                                                                |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of Mediation rules configured.                                                                                                                                                                            |
| Type                                                           | Counter                                                                                                                                                                                                                |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (nf-mediation,ocscp_med_active_rule_count_totalnf-mediation-test, iwfw-mediation, iwfw-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_med_total_rule_count{app= "nf-mediation",vendor="oracle"}                                                                                                                                                        |

**Table 5-265 ocscp\_med\_active\_rule\_count**

| Field                                                          | Details                                                                                                                                                                               |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of rules executed when a rule match is found for a particular message.                                                                                                   |
| Type                                                           | Counter                                                                                                                                                                               |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (nf-mediation,nf-mediation-test, iwfw-mediation, iwfw-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_med_active_rule_count_total{app="nf-mediation",vendor="oracle"}                                                                                                                 |

**Table 5-266 ocscp\_med\_individual\_rule\_exec\_count\_total**

| Field       | Details                                               |
|-------------|-------------------------------------------------------|
| Description | Total number of times a particular rule gets invoked. |
| Type        | Counter                                               |

**Table 5-266 (Cont.) ocscp\_med\_individual\_rule\_exec\_count\_total**

| Field                                                          | Details                                                                                                                                                                                                                                |
|----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app (nf-mediation,nf-mediation-test, iwf-mediation, iwf-mediation-test)</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> <li>• ruleName</li> <li>• ruleGroupName</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | sum(ocscp_med_individual_rule_exec_count_total{app="nf-mediation"}) by (ruleName,ruleGroupName)                                                                                                                                        |

**Table 5-267 ocscp\_med\_http\_req\_total**

| Field                                                          | Details                                                                                                                                                                                                             |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of ingress messages to NF.                                                                                                                                                                             |
| Type                                                           | Counter                                                                                                                                                                                                             |
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app (nf-mediation, iwf-mediation)</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> <li>• ruleGroupName</li> <li>• msgType (request, response)</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_med_req_total{msgType="request",app="nf-mediation",ruleGroupName="scp-agenda"}                                                                                                                                |

**Table 5-268 ocscp\_med\_http\_rsp\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of egress messages.                                                                                                                                                                                                                                                    |
| Type                                                           | Counter                                                                                                                                                                                                                                                                             |
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app (nf-mediation, iwf-mediation)</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> <li>• ruleGroupName</li> <li>• statusCode (supports specific codes:: 200, 500, 503)</li> <li>• msgType (request, response)</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_med_rsp_total{msgType="request",ruleGroupName="scp-agenda",statusCode=~"2.*"}                                                                                                                                                                                                 |

**Table 5-269 ocscp\_med\_test\_req\_total**

| Field       | Details                                                |
|-------------|--------------------------------------------------------|
| Description | Total number of incoming messages to the NF Test mode. |
| Type        | Counter                                                |



**Table 5-269 (Cont.) ocscp\_med\_test\_req\_total**

| Field                                                          | Details                                                                                                                                                                                                             |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (nf-mediation-test, iwf-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> <li>ruleGroupName</li> <li>msgType (request, response)</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_med_test_req_total{msgType="request",app="nf-mediation-test",ruleGroupName="scp-agenda"}                                                                                                                      |

**Table 5-270 ocscp\_med\_test\_rsp\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of response by the Test mode.                                                                                                                                                                                                                                                                    |
| Type                                                           | Counter                                                                                                                                                                                                                                                                                                       |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (nf-mediation,nf-mediation-test, iwf-mediation, iwf-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> <li>ruleGroupName</li> <li>statusCode (supports specific codes:: 200, 500, 503)</li> <li>msgType (request, response)</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_med_test_rsp_total{msgType="request"}                                                                                                                                                                                                                                                                   |

**Table 5-271 ocscp\_med\_msg\_forwarded\_to\_test\_mode\_total**

| Field                                                          | Details                                         |
|----------------------------------------------------------------|-------------------------------------------------|
| Description                                                    | Total Number of Requests forwarded to Test mode |
| Type                                                           | Counter                                         |
| Dimension                                                      | app(nf-mediation, iwf-mediation)                |
| Example usage to filter metric by dimension on the Grafana GUI | sum(ocscp_med_msg_forwarded_to_test_mode_total) |

**Table 5-272 ocscp\_med\_rule\_update\_status**

| Field                                                          | Details                                                                                                                                                                              |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | If rules reloading failed or successful.<br>Value = 0 {failed}<br>Value = 1 {successful}                                                                                             |
| Type                                                           | Gauge                                                                                                                                                                                |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (nf-mediation, nf-mediation-test, iwf-mediation, iwf-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | ocscp_med_rule_update_status{app="nf-mediation"}                                                                                                                                     |

**Table 5-273 ocsdp\_med\_individual\_rule\_processing\_time\_seconds**

| Field                                                          | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Processing time of the every rule invoked.                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Type                                                           | Histogram                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app (nf-mediation, nf-mediation-test, iwfw-mediation, iwfw-mediation-test)</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> <li>• ruleName</li> <li>• ruleGroupName</li> <li>• quantile</li> </ul> <p><b>quantile:</b> A quantile in histogram metrics is a statistical measure that estimates the value below which a given percentage of observations fall, based on the distribution of data across predefined buckets.</p> |
| Example usage to filter metric by dimension on the Grafana GUI | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

**Table 5-274 ocsdp\_med\_msg\_processing\_time\_seconds**

| Field                                                          | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Processing time of messages received by Mediation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Type                                                           | Histogram                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app (nf-mediation, nf-mediation-test, iwfw-mediation, iwfw-mediation-test)</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> <li>• statusCode</li> <li>• quantile</li> </ul> <p><b>quantile:</b> A quantile in histogram metrics is a statistical measure that estimates the value below which a given percentage of observations fall, based on the distribution of data across predefined buckets.</p> <p><b>statusCode:</b> The response code for the transactions</p> |
| Example usage to filter metric by dimension on the Grafana GUI | -                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Table 5-275 ocsdp\_med\_forward\_to\_ext\_total**

| Field                                                          | Details                                                                                                                                                     |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of messages forwarded to external.                                                                                                             |
| Type                                                           | Counter                                                                                                                                                     |
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app (iwfw-mediation, iwfw-mediation-test)</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | -                                                                                                                                                           |

**Table 5-276 ocscp\_med\_incoming\_rsp\_from\_ext\_total**

| Field                                                          | Details                                                                                                                                             |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of responses from external.                                                                                                            |
| Type                                                           | Counter                                                                                                                                             |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (iwf-mediation, iwf-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | -                                                                                                                                                   |

**Table 5-277 ocscp\_med\_incoming\_d2h\_req\_total**

| Field                                                          | Details                                                                                                                                             |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of requests from D2H service as a part of the protocol translation mode.                                                               |
| Type                                                           | Counter                                                                                                                                             |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (iwf-mediation, iwf-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | -                                                                                                                                                   |

**Table 5-278 ocscp\_med\_outgoing\_rsp\_to\_d2h\_total**

| Field                                                          | Details                                                                                                                                             |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of responses to D2H service as a part of protocol translation mode.                                                                    |
| Type                                                           | Counter                                                                                                                                             |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (iwf-mediation, iwf-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | -                                                                                                                                                   |

**Table 5-279 ocscp\_med\_forward\_to\_h2d\_total**

| Field                                                          | Details                                                                                                                                             |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of messages forwarded to H2D as a part of protocol translation mode.                                                                   |
| Type                                                           | Counter                                                                                                                                             |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (iwf-mediation, iwf-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | -                                                                                                                                                   |

**Table 5-280 ocscp\_med\_incoming\_rsp\_from\_h2d\_total**

| Field                                                          | Details                                                                                                                                             |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | Total number of responses received from H2D as a part of protocol translation as a service.                                                         |
| Type                                                           | Counter                                                                                                                                             |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app (iwf-mediation, iwf-mediation-test)</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> </ul> |
| Example usage to filter metric by dimension on the Grafana GUI | -                                                                                                                                                   |

**Table 5-281 ocscp\_med\_udv\_storage\_failure\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | <p>This metric tracks the total number of write operation failures encountered for a user-defined variable when a mediation rule is invoked during a transaction.</p> <p>Condition: The metric is incremented whenever a failure or exception occurs during write operations such as put, add, set, or del.</p> |
| Type                                                           | Counter                                                                                                                                                                                                                                                                                                         |
| Dimension                                                      | <ul style="list-style-type: none"> <li>app ("ocscp-scp-mediation", "ocscp-scp-mediation-test")</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> <li>userDefinedVariable</li> <li>triggerPoint</li> <li>operation</li> </ul>                                                                       |
| Example usage to filter metric by dimension on the Grafana GUI | <code>ocscp_med_udv_storage_failure_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", userDefinedVariable="user-imsi", triggerPoint="requestIngress", operation="set"}</code>                                                                                                    |

**Table 5-282 ocscp\_med\_udv\_read\_failure\_total**

| Field       | Details                                                                                                                                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>This metric represents the total number of read operation failures that occur for a user-defined variable when a mediation rule is invoked for a transaction.</p> <p>Condition: This metric is pegged if any failure or exception occurs during read operations, such as the get operation.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                            |
| Dimension   | <ul style="list-style-type: none"> <li>app ("ocscp-scp-mediation", "ocscp-scp-mediation-test")</li> <li>vendor</li> <li>kubernetes_namespace / namespace</li> <li>userDefinedVariable</li> <li>triggerPoint</li> <li>operation</li> </ul>                                                          |

**Table 5-282 (Cont.) ocscp\_med\_udv\_read\_failure\_total**

| Field                                                          | Details                                                                                                                                                                                                   |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Example usage to filter metric by dimension on the Grafana GUI | <code>ocscp_med_udv_read_failure_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", userDefinedVariable="user-imsi", triggerPoint="requestIngress", operation="has"}</code> |

**Table 5-283 ocscp\_med\_udv\_used\_total**

| Field                                                          | Details                                                                                                                                                                                                                                  |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | This metric represents the total number of transactions in which a Write or Delete operation was performed on user-defined variables.<br>Condition: This metric is pegged whenever a write or delete operation occurs for a transaction. |
| Type                                                           | Counter                                                                                                                                                                                                                                  |
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app ("ocscp-scp-mediation","ocscp-scp-mediation-test")</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> <li>• triggerPoint</li> <li>• operation</li> </ul>                    |
| Example usage to filter metric by dimension on the Grafana GUI | <code>ocscp_med_udv_used_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", triggerPoint="requestIngress", operation="WRITE"}</code>                                                                       |

**Table 5-284 ocscp\_med\_udv\_size\_mismatch\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | This metric represents the total number of times the size of the value assigned to a user-defined variable exceeds the configured size.<br>Condition: This metric is pegged whenever the size of the value assigned to a user-defined variable exceeds the configured size limit. |
| Type                                                           | Counter                                                                                                                                                                                                                                                                           |
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app ("ocscp-scp-mediation","ocscp-scp-mediation-test")</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> <li>• userDefinedVariable</li> </ul>                                                                           |
| Example usage to filter metric by dimension on the Grafana GUI | <code>ocscp_med_udv_size_mismatch_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", userDefinedVariable="user-imsi"}</code>                                                                                                                        |

**Table 5-285 ocscp\_med\_udv\_type\_mismatch\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | <p>This metric represents the total number of times the type of the value assigned to a user-defined variable differs from the configured data type.</p> <p>Condition: This metric is pegged whenever the type of the value assigned to a user-defined variable does not match the configured data type.</p> |
| Type                                                           | Counter                                                                                                                                                                                                                                                                                                      |
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app ("ocscp-scp-mediation","ocscp-scp-mediation-test")</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> <li>• userDefinedVariable</li> </ul>                                                                                                      |
| Example usage to filter metric by dimension on the Grafana GUI | <code>ocscp_med_udv_type_mismatch_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", userDefinedVariable="user-imsi"}</code>                                                                                                                                                   |

**Table 5-286 ocscp\_med\_udv\_not\_configured\_total**

| Field                                                          | Details                                                                                                                                                                                                                                                                  |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description                                                    | <p>This metric represents the total number of times a user-defined variable is used in a mediation rule without being configured.</p> <p>Condition: This metric is pegged whenever a user-defined variable that is not configured is still used in a mediation rule.</p> |
| Type                                                           | Counter                                                                                                                                                                                                                                                                  |
| Dimension                                                      | <ul style="list-style-type: none"> <li>• app ("ocscp-scp-mediation","ocscp-scp-mediation-test")</li> <li>• vendor</li> <li>• kubernetes_namespace / namespace</li> <li>• userDefinedVariable</li> <li>• triggerPoint</li> </ul>                                          |
| Example usage to filter metric by dimension on the Grafana GUI | <code>ocscp_med_udv_not_configured_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", triggerPoint="requestIngress", userDefinedVariable="user-imsi"}</code>                                                                               |

**Table 5-287 ocscp\_med\_udvs\_max\_size\_limit\_exceeded\_total**

| Field       | Details                                                                                                                                                                                                                                                                                                 |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | <p>This metric represents the total number of times the combined size of all user-defined variables and their values exceeds the configured size limit.</p> <p>Condition: This metric is pegged whenever the total size of all user-defined variables and their values exceeds the configured size.</p> |
| Type        | Counter                                                                                                                                                                                                                                                                                                 |

**Table 5-287 (Cont.) ocscp\_med\_udvs\_max\_size\_limit\_exceeded\_total**

| Field                                                          | Details                                                                                                                                                                                     |
|----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimension                                                      | <ul style="list-style-type: none"><li>• app ("ocscp-scp-mediation","ocscp-scp-mediation-test")</li><li>• vendor</li><li>• kubernetes_namespace / namespace</li><li>• triggerPoint</li></ul> |
| Example usage to filter metric by dimension on the Grafana GUI | <code>ocscp_med_udvs_max_size_limit_exceeded_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", triggerPoint="requestIngress"}</code>                         |

# 6

## Alerts

This section provides information about the supported alerts and how to configure the alerts.

### **Note**

The performance and capacity of the SCP system may vary based on the call model, feature or interface configuration, network conditions, and underlying CNE and hardware environment.

You can configure alerts in Prometheus and ScpAlertrules.yaml file.

The following table describes the various severity types of alerts generated by SCP:

**Table 6-1 Alerts Levels or Severity Types**

| Alerts Levels / Severity Types | Definition                                                                                                                                                                                                                                           |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Critical                       | Indicates a severe issue that poses a significant risk to safety, security, or operational integrity. It requires immediate response to address the situation and prevent serious consequences. Raised for conditions may affect the service of SCP. |
| Major                          | Indicates a more significant issue that has an impact on operations or poses a moderate risk. It requires prompt attention and action to mitigate potential escalation. Raised for conditions may affect the service of SCP.                         |
| Minor                          | Indicates a situation that is low in severity and does not pose an immediate risk to safety, security, or operations. It requires attention but does not demand urgent action. Raised for conditions may affect the service of SCP.                  |
| Info or Warn (Informational)   | Provides general information or updates that are not related to immediate risks or actions. These alerts are for awareness and do not typically require any specific response. WARN and INFO alerts may not impact the service of SCP.               |

### **Caution**

User, computer and applications, and character encoding settings may cause an issue when copy-pasting commands or any content from PDF. The PDF reader version also affects the copy-pasting functionality. It is recommended to verify the pasted content when the hyphens or any special characters are part of the copied content.



**Note**

- `kubectl` commands might vary based on the platform deployment. Replace `kubectl` with Kubernetes environment-specific command line tool to configure Kubernetes resources through kube-api server. The instructions provided in this document are as per the Oracle Communications Cloud Native Environment (OCCNE) version of kube-api server.
- The alert file can be customized as required by the deployment environment. For example, namespace can be added as a filtered criteria to the alert expression to filter alerts only for a specific namespace.

## 6.1 Configuring Alerts

This section describes how to configure alert rules for SCP in both Prometheus and OCI environments. It provides guidance on setting up measurement-based alert rules, where the alerting system evaluates metrics reported by SCP microservices against specified rule conditions to generate alerts as required.

### Prometheus Alert Configuration

In a Prometheus environment, SCP alert rules are configured based on metrics reported by SCP components. The alerting workflow monitors these metrics and issues notifications when the defined conditions are met.

For more information about configuring SCP alerts in Prometheus, see the "Alert Configuration" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

### OCI Alert Configuration

In OCI environments, SCP alert rules are defined using Metric Query Language (MQL). Configuring these alerts requires creating a dedicated SCP alert file for use with the OCI observability platform.

For more information about configuring SCP alerts in OCI, see the "Configuring SCP Alerts for OCI" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

## 6.2 System level alerts

This section lists the system level alerts.

### 6.2.1 SCPNotificationPodMemoryUsage

**Table 6-2 SCPNotificationPodMemoryUsage**

| Field       | Description                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Notify Notification service Pod memory usage if it is above threshold<br>Threshold value is 85% of allocated (4GB) memory: <b>3.4 GB</b> |

Table 6-2 (Cont.) SCPNotificationPodMemoryUsage

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Summary             | Memory usage is above 85% for podname: {{ \$labels.kubernetes_pod_name }}, instance: {{ \$labels.instance }}, namespace: {{ \$labels.kubernetes_namespace }} with current value {{ \$value }}, scpfqdn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}                                                                                                                                                                                                                                                                                                                         |
| Severity            | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Conditions          | sum(container_memory_usage_bytes{image!="",pod=~".*scpc-notification.+"}) by (kubernetes_pod_name,kubernetes_namespace,instance) > 3650722201                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| OID                 | 1.3.6.1.4.1.323.5.3.35.1.2.3001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Metric Used         | ocscp_nrf_notifications_requests_nf_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Recommended Actions | <p><b>Cause:</b> When high notification rate or very large NF profile size is present in notifications.</p> <p><b>Diagnostic Information:</b> Monitor the notification metric: ocscp_nrf_notifications_requests_nf_total.</p> <p>Notification usage reduces after some time when it crosses 2.5 GB or 3 GB.</p> <p><b>Recovery:</b> This alert is cleared automatically when the scpc-notification pod memory usage reduces below the defined threshold.</p> <p>Reduce the notification rate. These notifications are generated by NRF and can be controlled through NRF.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.2.2 SCPWorkerPodMemoryUsage

Table 6-3 SCPWorkerPodMemoryUsage

| Field                   | Description                                                                                                                                                                                                                                                                                                                 |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description             | Notify Worker per Pod memory usage is above threshold Threshold value is 85% of allocated (16GB) memory: 13.6 GB                                                                                                                                                                                                            |
| Summary                 | Memory usage is above 85% for podname: {{ \$labels.kubernetes_pod_name }}, instance: {{ \$labels.instance }}, namespace: {{ \$labels.kubernetes_namespace }} with current value {{ \$value }}, scpfqdn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }} |
| Severity                | major                                                                                                                                                                                                                                                                                                                       |
| Conditions              | sum(container_memory_usage_bytes{image!="",pod=~".*scp-worker.+"}) by (kubernetes_pod_name,kubernetes_namespace,instance) > 14602888806                                                                                                                                                                                     |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.7004                                                                                                                                                                                                                                                                                             |
| Metric Used             | <ul style="list-style-type: none"> <li>ocscp_metric_http_rx_req_total</li> <li>ocscp_metric_http_tx_req_total</li> <li>ocscp_metric_http_rx_res_total</li> <li>ocscp_metric_http_tx_res_total</li> </ul>                                                                                                                    |

Table 6-3 (Cont.) SCPWorkerPodMemoryUsage

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When there is high traffic rate, alternate routing, more number of routing rules and rules size, and due to network or producer NF latency.</p> <p><b>Diagnostic Information:</b> Monitor traffic rate, alerts, and latency on the KPI Dashboard.</p> <p>Check the traffic rates of the following metrics if they are too high:</p> <ul style="list-style-type: none"> <li>ocscp_metric_http_rx_req_total</li> <li>ocscp_metric_http_tx_req_total</li> <li>ocscp_metric_http_rx_res_total</li> <li>ocscp_metric_http_tx_res_total</li> </ul> <p>Check the upstream response time by using the following command and ensure whether upstream is taking too long to respond:<br/>ocscp_metric_upstream_service_time_total.</p> <p>Check the following platform metric for current memory usage by the scp-worker pod: container_memory_usage_bytes.</p> <p><b>Recovery:</b> This alert is cleared automatically when the scp-worker pod memory usage reduces below the defined threshold. Reduce the traffic rate and improve the latency.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.2.3 SCPIInstanceDown

Table 6-4 SCPIInstanceDown

| Field                   | Description                                                                                                                                                                                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description             | Notify that if any pod in ocscp release is down. Provides information like pod name, instance id and app name.                                                                                                                                                  |
| Summary                 | Pod with podname: {{\$labels.kubernetes_pod_name}} is Down , timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}                                                                                                           |
| Severity                | Critical                                                                                                                                                                                                                                                        |
| Conditions              | kube_pod_status_ready{pod =~ '*scp-worker.*'.*scpc-notification.*'.*scpc-subscription.*'.*scpc-configuration.*'.*scpc-audit.*'.*scpc-nrfproxy.*'.*scpc-load-manager.*'.*scpc-cache.*'.*scpc-alternate-resolution.*'.*scpc-mediation.*',condition =~ 'true'} !=1 |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.7006                                                                                                                                                                                                                                 |

Table 6-4 (Cont.) SCPIInstanceDown

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When the following issues occur:</p> <ul style="list-style-type: none"> <li>The Control plane pods, such as configuration, subscription, notification, audit, and alternate-resolution are down due to connection failure with DB.</li> <li>Pod restarts due to kubernetes liveness or readiness probe failures.</li> <li>Application restarts or starts failure.</li> </ul> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Check if DB services are active by running the following command:</li> </ul> <pre>kubectl describe pod &lt;podname&gt; -n &lt;namespace&gt;</pre> <ul style="list-style-type: none"> <li>Check kubernetes events for probe failures in the platform logs.</li> <li>Check if any exception is reported in the SCP application logs.</li> </ul> <p><b>Recovery:</b> This alert is cleared automatically when the inactive pod is active. Recover DB services if down. Collect the application logs and contact <a href="#">My Oracle Support</a> for any assistance.</p> |

## 6.3 Application level alerts

This section lists the application level alerts.

### 6.3.1 SCPCcaFeatureEnabledWithoutHttps

Table 6-5 SCPCcaFeatureEnabledWithoutHttps

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Info                                                                                                                                                                                                                                                                                                                                                               |
| Condition               | ocscp_worker_cca_validation_feature_enabled_without_https > 0                                                                                                                                                                                                                                                                                                      |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.9022                                                                                                                                                                                                                                                                                                                                    |
| Description             | An alert is raised when the CCA validation feature is enabled without enabling HTTPS.                                                                                                                                                                                                                                                                              |
| Recommended Actions     | <p><b>Cause:</b> CCA validation feature is enabled without enabling HTTPS.</p> <p><b>Diagnostic Information:</b></p> <p>Deploy HTTPS SCP deployment.</p> <p><b>Recovery:</b> The alert is cleared automatically if either the CCA feature is disabled or deployment is changed to HTTPS.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.2 SCPIngressTrafficRateAboveMinorThreshold

**Table 6-6 SCPIngressTrafficRateAboveMinorThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | This alert notifies that the traffic rate has increased from 9800 to 11200 Mbps, based on the user-configured minor threshold value. It also includes the locality and the current traffic rate value.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Summary</b>            | namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpfdn: {{ \$labels.ocscp_fqdn }}, scpauthority: {{ \$labels.ocscp_authority }}, timestamp: {{ with query "time()" }} {{ .   first   value   humanizeTimestamp }} {{ end }}: Current Ingress Traffic Rate is {{ \$value   printf "%.2f" }} mps which is above 70 Percent of Max MPS(14000)                                                                                                                                                                                                                                                       |
| <b>Severity</b>           | minor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Condition</b>          | sum(rate(ocscp_metric_http_rx_req_total{app_kubernetes_io_name="scp-worker"}[2m])) by (kubernetes_namespace,ocscp_locality,kubernetes_pod_name,ocscp_fqdn,ocscp_authority) >= 9800 < 11200                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.7001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Metric Used</b>        | ocscp_metric_http_rx_req_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Recommended Action</b> | <p><b>Cause:</b> When the Consumer NF sends more traffic than expected.</p> <p><b>Diagnostic Information:</b></p> <p>Monitor the ingress traffic to pod using the KPI Dashboard.</p> <p>Refer to the rate of ocscp_metric_http_rx_req_total metric on the Grafana GUI.</p> <p><b>Recovery:</b> This alert is cleared automatically when the ingress traffic reduces below the minor threshold or exceeds the major threshold. If this alert is not cleared, then check the Consumer NF for an uneven distribution of traffic per connection or for any other issue.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

### ① Note

The alert expression is configured for the SCP profile (12 vCPUs and 16 Gi of memory). For a smaller resource profile (for example, 8 vCPUs and 12 Gi of memory), the per-worker pod MPS should be evaluated based on the dimensioning sheet, and the alert file must be updated accordingly.

## 6.3.3 SCPIngressTrafficRateAboveMajorThreshold

**Table 6-7 SCPIngressTrafficRateAboveMajorThreshold**

| Field              | Details                                                                                                                                                                                                 |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | This alert notifies that the traffic rate has increased from 11200 to 13300 Mbps, based on the user-configured major threshold value. It also includes the locality and the current traffic rate value. |

Table 6-7 (Cont.) SCPIngressTrafficRateAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Summary            | namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpfdqn: {{ \$labels.ocscp_fqdn }}, scpauthority: {{ \$labels.ocscp_authority }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}: Current Ingress Traffic Rate is {{ \$value   printf "%.2f" }} mps which is above 80 Percent of Max MPS(14000)                                                                                                                                                                                                                                                                                                                                                              |
| Severity           | major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Condition          | sum(rate(ocscp_metric_http_rx_req_total{app_kubernetes_io_name="scp-worker"}[2m])) by (kubernetes_namespace,ocscp_locality,kubernetes_pod_name,ocscp_fqdn,ocscp_authority) >= 11200 < 13300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.7001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Metric Used        | ocscp_metric_http_rx_req_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Recommended Action | <p><b>Cause:</b> When the Consumer NF sends more traffic than expected.</p> <p><b>Diagnostic Information:</b> Monitor the ingress traffic to pod using the KPI Dashboard.</p> <p>Refer to the rate of ocscp_metric_http_rx_req_total metric on the Grafana GUI.</p> <p><b>Recovery:</b> This alert is cleared automatically when the ingress traffic reduces below the major threshold or exceeds the critical threshold. If this alert is not cleared, then check the Consumer NF for an uneven distribution of traffic per connection or for any other issue.</p> <p>If this alert continues for a long duration, then reduce the ingress traffic from consumer to pod.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

**Note**

The alert expression is configured for the SCP profile (12 vCPUs and 16 Gi of memory). For a smaller resource profile (for example, 8 vCPUs and 12 Gi of memory), the per-worker pod MPS should be evaluated based on the dimensioning sheet, and the alert file must be updated accordingly.

## 6.3.4 SCPIngressTrafficRateAboveCriticalThreshold

Table 6-8 SCPIngressTrafficRateAboveCriticalThreshold

| Field       | Details                                                                                                                                                                                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This alert notifies that the traffic rate has increased above 13300 mps, based on the user-configured major threshold value. It also includes the locality and the current traffic rate value.                                                                                                                                                     |
| Summary     | namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpauthority: {{ \$labels.ocscp_authority }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}: Current Ingress Traffic Rate is {{ \$value   printf "%.2f" }} mps which is above 95 Percent of Max MPS(14000) |

Table 6-8 (Cont.) SCPIngressTrafficRateAboveCriticalThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity           | critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Condition          | sum(rate(ocscp_metric_http_rx_req_total{app_kubernetes_io_name="scp-worker"}[2m])) by (kubernetes_namespace,ocscp_locality,kubernetes_pod_name,ocscp_fqdn,ocscp_authority) >= 13300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.7001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Metric Used        | ocscp_metric_http_rx_req_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Recommended Action | <p><b>Cause:</b> When the Consumer NF sends more traffic than expected.</p> <p><b>Diagnostic Information:</b> Monitor the ingress traffic to pod using the KPI Dashboard.</p> <p>Refer to the rate of the ocscp_metric_http_rx_req_total metric on the Grafana GUI.</p> <p><b>Recovery:</b> This alert is cleared automatically when the ingress traffic reduces below the critical threshold. If this alert is not cleared, then check the Consumer NF for an uneven distribution of traffic per connection or for any other issue.</p> <p>If this alert continues for a long duration, then reduce the ingress traffic from consumer to pod.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

**Note**

The alert expression is configured for the SCP profile (12 vCPUs and 16 Gi of memory). For a smaller resource profile (for example, 8 vCPUs and 12 Gi of memory), the per-worker pod MPS should be evaluated based on the dimensioning sheet, and the alert file must be updated accordingly.

## 6.3.5 SCPRoutingFailedForProducer

Table 6-9 SCPRoutingFailedForProducer

| Field                   | Description                                                                                                                 |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Severity                | Info                                                                                                                        |
| Conditions              | increase(ocscp_metric_routing_attempt_fail_total{app_kubernetes_io_name="scp-worker"}[2m]) > 0                              |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.7005                                                                                             |
| Description             | Notify that Routing failed for producer. Provides detail such as NFService Type, NFType, Locality, producer FQDN and value. |

Table 6-9 (Cont.) SCPRoutingFailedForProducer

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When routing fails to select a producer NF due to unavailability of routing rules for an NF service or producer.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>• Check whether the routing rules are configured for the NF for which routing failed.</li> <li>• Check the notification logs for any error while processing the notification of the NF for which routing failed. Then, run the following command to get the notification logs: <code>kubectl logs &lt;podname&gt; -n &lt;namespace&gt;</code></li> <li>• Check whether the NF is reachable or not by using one of the following steps: <ul style="list-style-type: none"> <li>– Run the ping command from primary/secondary nodes using IP of service. Example of a ping command: <code>ping &lt;IPAddress&gt;</code>.</li> <li>– Run the ping command from inside the pod, if FQDN of service is used.</li> <li>– Instead of using the ping command, you can collect tcpdump for ensuring the connectivity. tcpdump must be run on the debug container for scp-worker microservice. Example of a tcpdump: <code>tcpdump -w capture.pcap -i &lt;pod interface&gt;</code>.</li> </ul> </li> </ul> <p><b>Recovery:</b> This alert is cleared automatically when the routing is complete for a producer NF or no more traffic is received in the next Prometheus scrape interval.</p> <p>Check if the NF is deregistered. Register the NF to create routing rules if rules do not exist.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.6 SCPAuditErrorResponse

Table 6-10 SCPAuditErrorResponse

| Field                   | Description                                                                                                                                                                                                                       |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Info                                                                                                                                                                                                                              |
| Conditions              | ocscp_audit_error_response > 0                                                                                                                                                                                                    |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.4001                                                                                                                                                                                                   |
| Description             | <p>Alert is raised when Audit module receives a 3xx, 4xx, or 5xx error from NRF. This alert is labeled with specific nftype, nrfRegionOrSetId, and auditmethod.</p> <p><b>Note:</b> Alert is cleared on the next audit cycle.</p> |



Table 6-10 (Cont.) SCPAuditErrorResponse

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When the configured NRF sends error responses, down, or not reachable.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Check if NRF is up and reachable. To check the NRF status, see <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>.</li> <li>Check if the NF is reachable or not using one of the following steps: <ul style="list-style-type: none"> <li>Run the ping command from primary/secondary nodes using IP of NRF. Example of a ping command: <code>ping &lt;IpAddress&gt;</code>.</li> <li>Run the ping command from inside the pod if FQDN of NRF is used.</li> <li>Instead of using ping, you can collect tcpdump for ensuring connectivity. Example of a tcpdump: <code>tcpdump -w capture.pcap -i &lt;pod interface&gt;</code>.</li> </ul> </li> <li>Monitor audit and worker service logs: <code>kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;</code></li> <li>Check jaeger traces for scp-worker.</li> </ul> <p><b>Recovery:</b> The alert is cleared automatically during the next audit cycle and when no more errors are received. Collect audit and worker service logs and contact <a href="#">My Oracle Support</a> for any assistance.</p> |

## 6.3.7 SCPAuditEmptyNFArrayResponse

Table 6-11 SCPAuditEmptyNFArrayResponse

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description             | <p>Alert is generated when Audit module receives a 2xx response with empty NFInstance array from NRF. Alert is labeled with specific nfType, nrfRegionOrSetId, and auditmethod.</p> <p>Alert is cleared if Audit receives a success response with non-empty NFInstance array or on next audit cycle if topology source is changed to LOCAL.</p>                                                                                                                            |
| Summary                 | <p>SCP Audit received Empty NF Array Response for nfType <code>{{labels.nfType}}</code>, nrfRegionOrSetId: <code>{{labels.nrfRegionOrSetId}}</code>, auditmethod: <code>{{labels.auditmethod}}</code>, namespace: <code>{{labels.kubernetes_namespace}}</code>, podname: <code>{{labels.kubernetes_pod_name}}</code>, scpFqdn: <code>{{labels.ocscp_fqdn}}</code>, timestamp: <code>{{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{ end }}</code></p> |
| Severity                | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Conditions              | <code>ocscp_audit_2xx_empty_nf_array &gt; 0</code>                                                                                                                                                                                                                                                                                                                                                                                                                         |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.4002                                                                                                                                                                                                                                                                                                                                                                                                                                            |

Table 6-11 (Cont.) SCPAuditEmptyNFArrayResponse

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When NRF does not have any NF registered or due to any error condition on NRF.</p> <p><b>Diagnostic Information:</b> Check if NRF contains any registered NF and validate as required. For more information, refer to NRF documents.</p> <p><b>Recovery:</b> This alert is cleared automatically if Audit receives a success response with non-empty NFInstance array or during the next audit cycle when the topology source is changed to LOCAL.</p> <p>Register a NF with NRF or change the topology source to LOCAL.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.8 DuplicateLocalityFoundInForeignNF

Table 6-12 DuplicateLocalityFoundInForeignNF

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Conditions              | ocscp_notification_duplicate_foreign_location > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.3002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Description             | Alert is raised when an unknown NF or SCP is registered with duplicate locality from the present region.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Recommended Actions     | <p><b>Cause:</b> When SCP discovers a duplicate locality of an NF from an unknown region.</p> <p><b>Diagnostic Information:</b> Check logs for NF notification received by running the following command: <code>kubectl -n &lt;namespace&gt; logs &lt;pod name&gt;</code>.</p> <p>Check the following metric to get the NFInstanceId information for which this alert is raised: <code>ocscp_notification_duplicate_foreign_location (nfInstanceId)</code>.</p> <p>From the metric, get the NF Instance ID, Locality, and serving_scope.</p> <p>Check the NF Profile of the corresponding NF in the unknown region as identified by the serving_scope.</p> <p>Check and correct the locality in the NF Profile to ensure it aligns with localities of that unknown region that should be different from locality of SCP which reported this alert.</p> <p><b>Recovery:</b> This alert is cleared automatically if an unknown NF or SCP is deregistered or registers update with the correct locality.</p> <p>Re-register NF with correct locality information.</p> <p>Collect logs for notification and audit service.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.9 ForeignNFLocalityNotServed

**Table 6-13 ForeignNFLocalityNotServed**

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Conditions              | ocscp_notification_foreign_nf_locality_unserved > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.3003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Description             | Alert is raised when a Foreign Producer NF's locality is not served by any SCP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Recommended Actions     | <p><b>Cause:</b> When SCP discovers an unknown Producer NF's without any locality served by an SCP.</p> <p><b>Diagnostic Information:</b> Check logs for received NF notification by running the following command: <code>kubectl get pods -n &lt;namespace&gt;</code>.</p> <p><b>Note:</b> Use the complete name of notification pod in the following command: <code>kubectl logs &lt;pod&gt; -n &lt;namespace&gt;</code>.</p> <p>Check the following metric to get the NFInstanceId information for which this alert is raised: <code>ocscp_notification_foreign_nf_locality_unserved(nfInstanceId)</code>.</p> <p><b>Recovery:</b> This alert is cleared automatically if the unknown NF is deregistered or registers update received with locality served by SCP. Re-register NF with correct locality information.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.10 UnknownLocalityFoundInForeignNF

**Table 6-14 UnknownLocalityFoundInForeignNF**

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Conditions              | ocscp_notification_foreign_nf_locality_absent > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.3004                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Description             | Alert will be raised when a Foreign Producer NF's locality is unknown.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Recommended Actions     | <p><b>Cause:</b> When SCP discovers an unknown Producer NF's without locality information.</p> <p><b>Diagnostic Information:</b> Check logs for the received NF notification by running the following command: <code>kubectl get pods -n &lt;namespace&gt;</code>.</p> <p>Use the complete name of notification pod in the following command: <code>kubectl logs &lt;pod&gt; -n &lt;namespace&gt; -f --tail=0</code></p> <p>Check the following metric to get the NFInstanceId information for which this alert is raised: <code>ocscp_notification_foreign_nf_locality_absent(nfInstanceId)</code>.</p> <p><b>Recovery:</b> This alert is cleared automatically if unknown NF is deregistered or registers update received with locality known to SCP. Re-register NF with correct locality information.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.11 SCPUpstreamResponseTimeout

**Table 6-15 SCPUpstreamResponseTimeout**

| Field                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>             | Alert is raised when Upstream connection to a producer NF fails                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Summary</b>                 | SCP SUpstream Response Timeout for nfservicetype: <code>{{labels.ocscp_nf_service_type}}</code> , nftype <code>{{labels.ocscp_nf_type}}</code> , responsecode <code>{{labels.ocscp_response_code}}</code> , nfclustername <code>{{labels.ocscp_producer_host}}</code> , namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , timestamp: <code>{{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Severity</b>                | info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Conditions</b>              | <code>increase(ocscp_metric_upstream_response_timeout_total[2m]) &gt; 0</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>OID used for SNMP Traps</b> | 1.3.6.1.4.1.323.5.3.35.1.2.7011                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Recommended Actions</b>     | <p><b>Cause:</b> When a producer NF is down, not reachable, or latency is high.</p> <p><b>Diagnostic Information:</b> Check whether the producer NF is up and network connectivity to the producer NF is established by using one of the following steps:</p> <ul style="list-style-type: none"> <li>Run the ping command from primary/secondary nodes by using IP of producer NF. Example of a ping command: <code>ping &lt;IPAddress&gt;</code>.</li> <li>Run the ping command from inside the pod, if FQDN of producer NF is used.</li> <li>Instead of using the ping command, you can collect tcpdump for ensuring the connectivity. tcpdump must be run on the debug container for scp-worker microservice. Example of a tcpdump: <code>tcpdump -w capture.pcap -i &lt;pod interface&gt;</code>.</li> </ul> <p>Check the upstream response time by using the following metric and determine if upstream is taking too long to respond: <code>ocscp_metric_upstream_service_time</code> (producer FQDN)</p> <p><b>Recovery:</b> This alert is cleared automatically in the next scrape interval if the system does not observe any error.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.12 SCPSingleNfInstanceAvailableForNFType

**Table 6-16 SCPSingleNfInstanceAvailableForNFType**

| Field                          | Description                                                                         |
|--------------------------------|-------------------------------------------------------------------------------------|
| <b>Severity</b>                | Major                                                                               |
| <b>Conditions</b>              | <code>ocscp_no_nf_instance == 0</code>                                              |
| <b>OID used for SNMP Traps</b> | 1.3.6.1.4.1.323.5.3.35.1.2.3005                                                     |
| <b>Description</b>             | Alert is raised when there is a single NFInstance available with SCP for an NFType. |

Table 6-16 (Cont.) SCPSingleNFInstanceAvailableForNFType

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When the preventiveAuditOnLastNFInstanceDeletion attribute is set to true, SCP has single NFInstance available for an NFType.</p> <p><b>Diagnostic Information:</b> Check all SCP NRFs for specific NFType in the alert if only one NFInstance is available.</p> <p>For information about registered NFs, see <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>.</p> <p>Check the number of NFs of a particular type by using API or CNC console of SCP. For information about procedures to check the NFs available with SCP, see "Configuring Service Communication Proxy using the CNC Console" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy User Guide</i>.</p> <p><b>Recovery:</b> This alert is cleared automatically in the next scrape interval if more than one NFInstance is available for a specified NFType in the alert.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

### 6.3.13 SCPNoNFInstanceForNFType

Table 6-17 SCPNoNFInstanceForNFType

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Conditions              | ocscp_no_nf_instance == 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.3006                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Description             | Alert is raised when there is a no NFInstance available with SCP for a NFType                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Recommended Actions     | <p><b>Cause:</b> When the preventiveAuditOnLastNFInstanceDeletion flag is set to true, SCP has no NFInstance available for a NFType.</p> <p><b>Diagnostic Information:</b> Check all SCP NRFs for specific NFType in the alert if no NFInstance is available.</p> <p>For information about registered NFs, see <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>.</p> <p>Check the number of NFs of a particular type by using API or CNC console of SCP. For information about procedures to check the NFs available with SCP, see "Configuring Service Communication Proxy using the CNC Console" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy User Guide</i>.</p> <p><b>Recovery:</b> This alert is cleared automatically in the next scrape interval if at least one NFInstance is available for a specified NFType in the alert.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.14 SCPIngressTrafficRateExceededConfiguredLimit

**Table 6-18 SCPIngressTrafficRateExceededConfiguredLimit**

| Alert Parameters           | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>         | Ingress traffic rate exceeds configured rate limit for consumer fqdn: <code>{{labels.ocscp_consumer_fqdn}}</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Summary</b>             | 'Ingress traffic rate exceeds configured rate limit for consumer fqdn: ocscpconsumerfqdn = <code>{{labels.ocscp_consumer_host}},consumernfinstanceid = {{labels.ocscp_consumer_nf_instance_id}}, consumernftype = {{labels.ocscp_consumer_nf_type}}, configuredingressrate = {{labels.ocscp_configured_ingress_rate}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}},scp_fqdn: ' {{labels.scp_fqdn}} ',timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}</code> and value = <code>{{ \$value }}</code> '                                                                                                                                                                                           |
| <b>Severity</b>            | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Condition</b>           | This alert is raised when the ingress traffic rate exceeds the configured rate for consumer FQDN.<br><code>increase(ocscp_metric_ingress_rate_limiting_throttle_req_total[2m]) &gt; 0</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>OID</b>                 | 1.3.6.1.4.1.323.5.3.35.1.2.7012                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Metric Used</b>         | ocscp_metric_ingress_rate_limiting_throttle_req_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Recommended Actions</b> | <p><b>Cause:</b><br/>When the ingress traffic rate exceeds the configured rate limit for the consumer FQDN.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Check the ingress traffic rate from the consumer FQDN.</li> <li>To check the ingress rate, refer to the following metrics:<br/><code>cscp_metric_http_rx_req_total</code></li> <li>Check the ingress rate limit configuration as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> </ul> <p><b>Recovery:</b><br/>This alert is cleared when no more requests get suppressed due to ingress rate limiting in the next scrape interval.<br/>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.15 SCPIngressTrafficRoutedWithoutRateLimitTreatment

**Table 6-19 SCPIngressTrafficRoutedWithoutRateLimitTreatment**

| Alert Parameters   | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | Ingress traffic routed without rate limit treatment                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Summary</b>     | 'Ingress traffic routed without rate limit treatment: consumernftype = <code>{{labels.ocscp_consumer_nf_type}},consumernfinstanceid = {{labels.ocscp_consumer_nf_instance_id}}, consumerfqdn = {{labels.ocscp_consumer_host}}, cause = {{labels.ocscp_cause}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}},scp_fqdn: ' {{labels.scp_fqdn}} ', timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}</code> and value = <code>{{ \$value }}</code> ' |
| <b>Severity</b>    | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Table 6-19 (Cont.) SCPIngressTrafficRoutedWithoutRateLimitTreatment

| Alert Parameters    | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Condition           | This alert is raised when the ingress traffic routes without rate limiting treatment.<br>increase(ocscp_metric_ingress_rate_limiting_not_applied_req_total[2m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| OID                 | 1.3.6.1.4.1.323.5.3.35.1.2.7013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Metric Used         | ocscp_metric_ingress_rate_limiting_not_applied_req_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Recommended Actions | <p><b>Cause:</b><br/>When the ingress traffic routes without rate limiting treatment.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Check the ingress rate limiting configurations for the untreated FQDNs that can be obtained from the following metric:<br/>ocscp_metric_ingress_rate_limiting_not_applied_req_total(ocscp_consumer_fqdn)</li> <li>Check the ingress rate limit configuration as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> </ul> <p><b>Recovery:</b><br/>This alert is cleared when no more requests get routed without ingress rate limiting treatment in the next scrape interval.<br/>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.16 SCPEgressTrafficRateExceededConfiguredLimit

Table 6-20 SCPEgressTrafficRateExceededConfiguredLimit

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description             | Alert is raised when the egress traffic rate exceed the configured rate.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Summary                 | Egress traffic rate exceeds configured rate limit: consumerntype = {{ \$labels.ocscp_consumer_nf_type }}, consumerntypeinstanceid = {{ \$labels.ocscp_consumer_nf_instance_id }}, consumerfqdn = {{ \$labels.ocscp_consumer_host }}, producerntype = {{ \$labels.ocscp_nf_type }}, producerntypeserviceid = {{ \$labels.ocscp_nf_service_type }}, producerntypeinstanceid = {{ \$labels.ocscp_nf_instance_id }}, producerfqdn = {{ \$labels.ocscp_producer_host }}, configuredegressrate = {{ \$labels.ocscp_configured_egress_rate }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpfqdn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }} and value = {{ \$value }} |
| Severity                | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Conditions              | increase(ocscp_metric_egress_rate_limiting_throttle_req_total{app_kubernetes_io_name="scp-worker"}[2m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.7014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

Table 6-20 (Cont.) SCPEgressTrafficRateExceededConfiguredLimit

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When the egress traffic rate exceeds the configured rate.</p> <p><b>Diagnostic Information:</b> Check the egress traffic rate by using the following metric: <code>ocscp_metric_http_tx_req_total</code>.</p> <p>Check the egress rate limit configuration as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</p> <p><b>Recovery:</b> This alert is cleared when no more requests get suppressed due to egress rate limiting in the next scrape interval.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

### 6.3.17 SCPEgressTrafficRoutedWithoutRateLimitTreatment

Table 6-21 SCPEgressTrafficRoutedWithoutRateLimitTreatment

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description             | Alert is raised when egress traffic routes without rate limiting.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Summary                 | Egress traffic routed without rate limiting: <code>producerntype = {{labels.ocscp_nf_type}}, producerntservicetype = {{labels.ocscp_nf_service_type}}, producerninstanceid = {{labels.ocscp_nf_instance_id}}, producerfqdn = {{labels.ocscp_producer_host}}, cause = {{labels.ocscp_cause}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}}, scpfqdn: {{labels.ocscp_fqdn}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }} and value = {{ \$value }}</code>                                                                                                                                                                                                                        |
| Severity                | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Conditions              | <code>increase(ocscp_metric_egress_rate_limiting_not_applied_req_total{app_kubernetes_io_name="scp-worker"}[2m]) &gt; 0</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.7015                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Recommended Actions     | <p><b>Cause:</b> When the egress traffic routes without rate limiting treatment.</p> <p><b>Diagnostic Information:</b> Check the egress rate limiting configurations for the untreated producer FQDN.</p> <p>Obtain the producer FQDN by using the following metric: <code>ocscp_metric_egress_rate_limiting_not_applied_req_total(ocscp_producer_fqdn)</code></p> <p>Check the egress rate limit configuration as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</p> <p><b>Recovery:</b> This alert is cleared when no more requests get routed without egress rate limiting treatment in the next scrape interval.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |



## 6.3.18 SCPNotificationRejectTopologySourceLocal

**Table 6-22 SCPNotificationRejectTopologySourceLocal**

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Conditions              | increase(ocscp_notifications_rejected_topologysource_local_total[15m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.3007                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Description             | Alert is raised when SCP rejects a notification from NRF due to topology source set to LOCAL for NF Type.                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Recommended Actions     | <p><b>Cause:</b> When NF Topology Source Info is set to LOCAL.</p> <p><b>Diagnostic Information:</b> Check the topology source information of an NF Type.</p> <p>For information about the topology source APIs, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy User Guide</i>.</p> <p><b>Recovery:</b> This alert is cleared automatically after 15 minutes when NF Topology Source Info is set to NRF from LOCAL.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.19 SCPNotificationProcessingFailureForNF

**Table 6-23 SCPNotificationProcessingFailureForNF**

| Field                   | Description                                                                                                                                                                                                                                                                                                                                 |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description             | Alerts is raised when Notification processing has failed on SCP.                                                                                                                                                                                                                                                                            |
| Summary                 | SCP Notification Processing failure for nfInstanceId: {{ \$labels.nfInstanceId }}, nfType: {{ \$labels.nfType }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpfqdn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }} |
| Severity                | Major                                                                                                                                                                                                                                                                                                                                       |
| Conditions              | increase(ocscp_notification_nf_profile_processing_failure_total[15m]) > 0                                                                                                                                                                                                                                                                   |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.3008                                                                                                                                                                                                                                                                                                             |

Table 6-23 (Cont.) SCPNotificationProcessingFailureForNF

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When Notification processing has failed on SCP.</p> <p><b>Diagnostic Information:</b> Check notification pod logs for any errors by running the following command:</p> <pre>kubectl logs &lt;notification pod name&gt; -n &lt;scp namespace&gt;</pre> <p>To get the list of pods, run the following command:</p> <pre>kubectl get pod -n &lt;scp namespace&gt;</pre> <p>Sample logs:</p> <pre>{   "instant":   {     "epochSecond":1620272241,"nanoOfSecond":609935406},   "thread":"runQueueThreadPool1","level":"ERROR","loggerName":"com.oracle.cgbu.cne.scp.soothsayer.Process","message":"{logMsg=Notified profile IP endpoints already present in stored profile, logMsgCode=DUPLICATE_IPENDPOINT_OR_FQDN_FOUND_IN_STORED_PROFILE, rootCause=Notified Profile contains an ipEndPoint {\\"ipv4Address\\":\\"10.75.203.74\\",\\"transport\\":\\"TCP\\",\\"port\\":32673} which is already present in stored Profile with nfInstanceId 93ED74AA-A29C-4450-9D7A-9278CAF6266D for serviceInstanceId audmcl08nv08-udmueauthn-589d6d5bcc-4dslh}", "endOfBatch":false, "loggerFqcn":"org.apache.logging.log4j.spi.AbstractLogger", "threadId":34, "threadPriority":5, "messageTimestamp":"21-05-06 03:37:21.609+0000", "application":"ocscp-soothsayer", "microservice":"ocscp-scp-notification", "engVersion":"25.2.100", "mktgVersion":"25.2.100.0.0", "vendor":"oracle", "namespace":"scpsvc", "node":"worker1", "pod":"ocscp-scp-notification-547f699c96-m7nc8", "subsystem":"notification", "instanceType":"prod", "processId":"1"}   {     "instant":     {       "epochSecond":1620272241,"nanoOfSecond":734873890},     "thread":"runQueueThreadPool1","level":"WARN","loggerName":"com.oracle.cgbu.cne.scp.soothsayer.scheduler.RunQueueConsumer","message":"{logMsg=Profile Processing failed, nfInstanceId=93ED74AA-A29C-4450-9D7A-9278CAF6266D}", "endOfBatch":false, "loggerFqcn":"org.apache.logging.log4j.spi.AbstractLogger", "threadId":34, "threadPriority":5, "messageTimestamp":"21-05-06 03:37:21.734+0000", "application":"ocscp-soothsayer", "microservice":"ocscp-scp-</pre> |

Table 6-23 (Cont.) SCPNotificationProcessingFailureForNF

| Field | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>notification", "engVersion": "25.2.100", "mktgVersion": "25.2.100.0.0", "vendor": "oracle", "namespace": "scpsvc", "node": "worker1", "pod": "ocscp-scpc-notification-547f699c96-m7nc8", "subsystem": "notification", "instanceType": "prod", "processId": "1"}"</p> <p>For information about the topology source APIs, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</p> <p><b>Recovery:</b> This alert is cleared automatically after 15 minutes.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.20 SCPSubscriptionFailureForNFType

Table 6-24 SCPSubscriptionFailureForNFType

| Field                          | Description                                                                                                                              |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Severity</b>                | Critical                                                                                                                                 |
| <b>Conditions</b>              | increase(ocscp_subscription_nf_failure_total[2m]) > 0                                                                                    |
| <b>OID used for SNMP Traps</b> | 1.3.6.1.4.1.323.5.3.35.1.2.2001                                                                                                          |
| <b>Description</b>             | Alerts is raised when SCP subscription to NRF has failed. This alert is labeled with specific nfType, nrfRegionOrSetId, and auditMethod. |

Table 6-24 (Cont.) SCPSubscriptionFailureForNFType

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When the subscription fails for an NF Type with NRF.</p> <p><b>Diagnostic Information:</b></p> <p>Check whether NRF is up. To check NRF status, see <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>.</p> <p>Check whether the NRF is reachable or not by using one of the following steps:</p> <ul style="list-style-type: none"> <li>Run the ping command from primary or secondary nodes using IP of NRF. Example of a ping command: ping &lt;IPAddress&gt;.</li> <li>Run the ping command from inside the pod if FQDN of NRF is used.</li> <li>Instead of using ping, you can collect tcpdump for ensuring the connectivity. Example of a tcpdump: tcpdump -w capture.pcap -i &lt;pod interface&gt;.</li> </ul> <p>If NRF is up, check scp-worker logs to find any error response from NRF. If there are error responses, monitor NRF logs: kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;.</p> <p>Sample logs:</p> <pre>{   "instant":   {"epochSecond":1620275506,"nanoOfSecond":134773910},   "thread":"pool-8- thread-1","level":"ERROR","loggerName":"com.oracle.cgbu.cne.scp.soothsayer.subscription.processor.SubscriptionDataConsumer","message":"{logMsg=Exception occurred while handling action for subscriber data, action=TO_BE_RENEWED, stackTrace=com.oracle.cgbu.cne.scp.soothsayer.subscription.operations.NrfSubscriptionClient.triggerPatchRequest(NrfSubscriptionClient.java:177)\ncom.oracle.cgbu.cne.scp.soothsayer.subscription.processor.SubscriptionDataConsumer.handleAction(SubscriptionsDataConsumer.java:322)\ncom.oracle.cgbu.cne.scp.soothsayer.subscription.processor.SubscriptionDataConsumer.consumeSQ(SubscriptionsDataConsumer.java:140)\ncom.oracle.cgbu.cne.scp.soothsayer.subscription.processor.SubscriptionDataConsumer.run(SubscriptionsDataConsumer.java:84)\njava.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1130)\njava.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:630)\njava.base/java.lang.Thread.run(Thread.java:832)}",   "endOfBatch":false,   "loggerFqn":"org.apache.logging.log4j.spi.AbstractLogger",   "threadId":33,   "threadPriority":5,   "messageTimestamp":"21-05-06 04:31:46.134+0000",   "application":"ocscp-soothsayer",   "microservice":"ocscp-scpc-subscription",   "engVersion":"1.15.0",   "mktgVersion":"1.15.0.0.0",   "vendor":"oracle",   "namespace":"scpsvc",   "node":"primary",   "pod":"ocscp-scpc-</pre> |

Table 6-24 (Cont.) SCPSubscriptionFailureForNFType

| Field | Description                                                                                                                                                                                                                                                                                                                       |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>subscription-55cfb57cc6-2qp2g", "subsystem": "subscription", "instanceType": "prod", "processId": "1"}<br/><br/> <b>Recovery:</b> This alert is cleared automatically when NRF is up and running or errors are corrected for received error responses.<br/> For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.21 SCPReSubscriptionFailureForNFType

Table 6-25 SCPReSubscriptionFailureForNFType

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Conditions              | increase(ocscp_patch_subscription_nf_failure_total[2m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.2002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Description             | Alerts is raised when SCP re-subscription to NRF has failed. This alert is labeled with specific nftype, nrfRegionOrSetId, and auditmethod.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Recommended Actions     | <p><b>Cause:</b> When the re-subscription fails for an NF Type with NRF.</p> <p><b>Diagnostic Information:</b></p> <p>Check whether NRF is up. To check the NRF status, see the <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>.</p> <p>Check whether the NRF is reachable or not by using one of the following steps:</p> <ul style="list-style-type: none"> <li>Run the ping command from primary/secondary nodes by using IP of NRF. Example of a ping command: ping &lt;IPAddress&gt;.</li> <li>Run the ping command from inside the pod, if FQDN of NRF is used.</li> <li>Instead of using ping, you can collect tcpdump for ensuring the connectivity. Example of a tcpdump: tcpdump -w capture.pcap -i &lt;pod interface&gt;.</li> </ul> <p>Check scp-worker logs to find any error response from NRF. If there are error responses, monitor NRF logs: kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;.</p> <p><b>Recovery:</b> This alert is cleared automatically when NRF is up and running or errors are corrected for received error responses.<br/> For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.22 SCPNrfRegistrationFailureForRegionOrSetId

Table 6-26 SCPNrfRegistrationFailureForRegionOrSetId

| Field       | Description                                                                   |
|-------------|-------------------------------------------------------------------------------|
| Description | 'SCP Registration Failure for Region Or SetId: {{\$labels.nrfRegionOrSetId}}' |

Table 6-26 (Cont.) SCPNrfRegistrationFailureForRegionOrSetId

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Summary                 | 'SCP Registration Failure for Region Or SetId: {{\$labels.nrfRegionOrSetId}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, scpFqdn: '{{\$labels.scpFqdn}}', timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Severity                | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Conditions              | This alert is raised when SCP registration fails. This alert is labeled with specific nftype, nrfRegionOrSetId, and auditmethod.<br>increase(ocscp_subscription_nrf_registration_failure_total[2m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.2003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Metric Used             | ocscp_subscription_nrf_registration_failure_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Recommended Actions     | <p><b>Cause:</b> When the registration fails for an NF Type with NRF.</p> <p><b>Diagnostic Information:</b></p> <p>Check whether NRF is up. To check the NRF status, see the <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>.</p> <p>Check whether the NRF is reachable or not by using one of the following steps:</p> <ul style="list-style-type: none"> <li>Run the ping command from primary or secondary nodes by using IP of NRF.<br/>Example of a ping command: ping &lt;IPAddress&gt;.</li> <li>Run the ping command from inside the pod if FQDN of NRF is used.</li> <li>Instead of using ping, you can collect tcpdump for ensuring the connectivity.<br/>Example of a tcpdump: tcpdump -w capture.pcap -i &lt;pod interface&gt;.</li> </ul> <p>Check scp-worker logs to find any error response from NRF. If there are error responses, monitor NRF logs: kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;.</p> <p>Sample logs:</p> <pre>{   "instant":   {     "epochSecond":1620638888,     "nanoOfSecond":78728229,     "thread":"reg     istration-0",     "level":"ERROR",     "loggerName":"com.oracle.cgbu.cne.s     cp.soothsayer.subscription.processor.NrfRegistrationProcessor",     "message":"{logMsg=Registration will be retried after configured     interval,     configuredIntervalInSec=6}",     "endOfBatch":false,     "loggerFqcn":"org     .apache.logging.log4j.spi.AbstractLogger",     "threadId":33,     "threadP     riority":5,     "messageTimestamp":"21-05-10     09:28:08.078+0000",     "application":"ocscp-     soothsayer",     "microservice":"ocscp-scp-     subscription",     "engVersion":"25.2.100",     "mktgVersion":"25.2.100.0.     0",     "vendor":"oracle",     "namespace":"scpsvc",     "node":"worker1",     "pod":     "ocscp-scp-     subscription-66c68b9db6-6g582",     "subsystem":"subscription",     "insta     nceType":"prod",     "processId":"1"   } }</pre> <p><b>Recovery:</b> This alert is cleared automatically when NRF is up and running or errors are corrected for received error responses.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.23 SCPNrfHeartbeatFailureForRegionOrSetId

**Table 6-27 SCPNrfHeartbeatFailureForRegionOrSetId**

| Field                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>             | Alerts is raised when SCP Heartbeat fails.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Summary</b>                 | SCP Heartbeat to NRF Failure for Region Or SetId:<br>{{ \$labels.nrfRegionOrSetId }}, namespace:<br>{{ \$labels.kubernetes_namespace }}, podname:<br>{{ \$labels.kubernetes_pod_name }}, scp fqdn: {{ \$labels.ocscp_fqdn }},<br>timestamp: {{ with query "time()" }}{{ .   first   value  <br>humanizeTimestamp }}{{ end }}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Severity</b>                | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Conditions</b>              | increase(ocscp_subscription_nrf_heartbeat_failures_total[2m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>OID used for SNMP Traps</b> | 1.3.6.1.4.1.323.5.3.35.1.2.2004                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Recommended Actions</b>     | <p><b>Cause:</b> When the Heartbeat fails for an NF Type with NRF.</p> <p><b>Diagnostic Information:</b></p> <p>Check whether NRF is up. To check the NRF status, see the <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>.</p> <p>Check whether the NRF is reachable or not by using one of the following steps:</p> <ul style="list-style-type: none"> <li>Run the ping command from primary or secondary nodes by using IP of NRF. Example of a ping command: ping &lt;IPAddress&gt;.</li> <li>Run the ping command from inside the pod if FQDN of NRF is used.</li> <li>Instead of using ping, you can collect tcpdump for ensuring the connectivity. Example of a tcpdump: tcpdump -w capture.pcap -i &lt;pod interface&gt;.</li> </ul> <p>Check scp-worker logs to find any error response from NRF. If there are error responses, monitor NRF logs: kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;.</p> <p><b>Recovery:</b> This alert is cleared automatically when NRF is up and running or errors are corrected for received error responses.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.24 SCPDBOperationFailure

**Table 6-28 SCPDBOperationFailure**

| Field                          | Description                                        |
|--------------------------------|----------------------------------------------------|
| <b>Severity</b>                | Warning                                            |
| <b>Conditions</b>              | increase(ocscp_db_operation_failure_total[2m]) > 0 |
| <b>OID used for SNMP Traps</b> | 1.3.6.1.4.1.323.5.3.35.1.2.2005                    |
| <b>Description</b>             | Alert is raised for any DB operation failures.     |

Table 6-28 (Cont.) SCPDBOperationFailure

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When the SCP DB operation fails.</p> <p><b>Diagnostic Information:</b><br/>Check whether the DB service is up.<br/>Check the status/age of the mysql pod by using the following command: <code>kubectl get pods -n &lt;namespace&gt;</code>. Where, &lt;namespace&gt; is the namespace in which mysql pod is deployed.</p> <p><b>Recovery:</b> This alert is cleared automatically when the DB service is up and running.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.25 SCPGeneratedErrorsResponseForNFService

Table 6-29 SCPGeneratedErrorsResponseForNFService

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Conditions              | <code>increase(ocscp_metric_scp_generated_response_total[2m]) &gt; 0</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.7016                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description             | Alert is raised for NF type for which SCP generated response is triggered.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Recommended Actions     | <p><b>Cause:</b> When the error response is generated for NF Service Type by SCP.</p> <p><b>Diagnostic Information:</b><br/>Monitor scp-worker logs to determine the reason for error responses generated by SCP. Check for error reason in the logs: <code>kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;</code>.</p> <p><b>Recovery:</b> This alert is cleared automatically when the cause for error response at SCP worker is corrected and configured.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.26 SCPCircuitBreakingAppliedForNF

Table 6-30 SCPCircuitBreakingAppliedForNF

| Field                   | Description                                              |
|-------------------------|----------------------------------------------------------|
| Severity                | Info                                                     |
| Conditions              | <code>ocscp_circuit_breaking_applied &gt; 0</code>       |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.7017                          |
| Description             | Alert is raised for NF when circuit breaking is applied. |



Table 6-30 (Cont.) SCPCircuitBreakingAppliedForNF

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When Circuit Breaking applies for producer NF FQDN based on the configured http2MaxRequests value.</p> <p><b>Diagnostic Information:</b></p> <p>Monitor scp-worker logs for number of error responses when outstanding requests exceed the configured http2MaxRequests value: <code>kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;</code>.</p> <p>Check the latency to upstream producer from SCP. Use the following metric to check the same: <code>ocscp_metric_upstream_service_time_total(ocscp_producer_host or ocscp_nf_end_point)</code>.</p> <p><b>Recovery:</b> This alert is cleared automatically when the configuration for http2MaxRequests for circuit breaking is configured beyond the traffic at worker or lower the traffic than the value configured for circuit breaking.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.27 SCPUpgradeStarted

Table 6-31 SCPUpgradeStarted

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Conditions              | When the SCP upgrade process for an SCP microservice starts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.6001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Description             | Alert is raised when the SCP upgrade process for an SCP microservice starts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Recommended Actions     | <p><b>Cause:</b> When SCP upgrade is performed for a particular microservice.</p> <p><b>Diagnostic Information:</b> Not applicable.</p> <p><b>Recovery:</b> This alert is cleared automatically in 5 minutes when the customAlertExpiryEnabled parameter is set to false in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the customAlertExpiryDuration parameter when the customAlertExpiryEnabled value is true.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.28 SCPUpgradeFailed

Table 6-32 SCPUpgradeFailed

| Field                   | Description                                                         |
|-------------------------|---------------------------------------------------------------------|
| Severity                | Critical                                                            |
| Conditions              | When any SCP microservice upgrade fails during the upgrade process. |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.6002                                     |
| Description             | Alert is raised when any SCP microservice upgrade fails.            |

Table 6-32 (Cont.) SCPUpgradeFailed

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> When any SCP microservice upgrade fails during the upgrade process.</p> <p><b>Diagnostic Information:</b> Monitor new hook-jobs that might have failed after multiple attempts. Also, monitor any failed log.</p> <p>Run the following command to check the pod of hook-job: <code>kubectl get pods -n &lt;namespace&gt;</code>.</p> <p>Run the following command to check the logs: <code>kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;</code>.</p> <p><b>Recovery:</b> This alert is cleared automatically in 5 minutes when the <code>customAlertExpiryEnabled</code> parameter is set to <code>false</code> in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the <code>customAlertExpiryDuration</code> parameter when the <code>customAlertExpiryEnabled</code> value is <code>true</code>.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.29 SCPUpgradeSuccessful

Table 6-33 SCPUpgradeSuccessful

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Conditions              | When any SCP microservice upgrade is completed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.6003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description             | Alert is raised when any SCP microservice upgrade is completed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Recommended Actions     | <p><b>Cause:</b> When any SCP microservice upgrade is completed.</p> <p><b>Diagnostic Information:</b> Not applicable.</p> <p>Run the following command to check the pod of hook-job: <code>kubectl get pods -n &lt;namespace&gt;</code>.</p> <p>Run the following command to check the logs: <code>kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;</code>.</p> <p><b>Recovery:</b> This alert is cleared automatically in 5 minutes when the <code>customAlertExpiryEnabled</code> parameter is set to <code>false</code> in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the <code>customAlertExpiryDuration</code> parameter when the <code>customAlertExpiryEnabled</code> value is <code>true</code>.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.30 SCPRollbackStarted

Table 6-34 SCPRollbackStarted

| Field                   | Description                                               |
|-------------------------|-----------------------------------------------------------|
| Severity                | Info                                                      |
| Conditions              | When the rollback process for an SCP microservice starts. |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.6004                           |

Table 6-34 (Cont.) SCPRollbackStarted

| Field                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>         | Alert is raised when the rollback process for an SCP microservice starts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Recommended Actions</b> | <p><b>Cause:</b> When the rollback process for an SCP microservice starts.</p> <p><b>Diagnostic Information:</b> Not applicable.</p> <p><b>Recovery:</b> This alert is cleared automatically in 5 minutes when the <code>customAlertExpiryEnabled</code> parameter is set to <code>false</code> in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the <code>customAlertExpiryDuration</code> parameter when the <code>customAlertExpiryEnabled</code> value is <code>true</code>.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.31 SCPRollbackFailed

Table 6-35 SCPRollbackFailed

| Field                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Severity</b>                | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Conditions</b>              | When any SCP microservice rollback fails during the rollback process.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>OID used for SNMP Traps</b> | 1.3.6.1.4.1.323.5.3.35.1.2.6005                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Description</b>             | Alert is raised when any SCP microservice rollback fails.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Recommended Actions</b>     | <p><b>Cause:</b> When any SCP microservice rollback fails during the rollback process.</p> <p><b>Diagnostic Information:</b> Monitor new hook-jobs that might have failed after multiple attempts. Also, monitor any failed log.</p> <p>Run the following command to check the pod of hook-job:</p> <pre>kubectl get pods -n &lt;namespace&gt;</pre> <p>Run the following command to check the logs:</p> <pre>kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;</pre> <p><b>Recovery:</b> This alert is cleared automatically in 5 minutes when the <code>customAlertExpiryEnabled</code> parameter is set to <code>false</code> in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the <code>customAlertExpiryDuration</code> parameter when the <code>customAlertExpiryEnabled</code> value is <code>true</code>.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.32 SCPRollbackSuccessful

Table 6-36 SCPRollbackSuccessful

| Field           | Description |
|-----------------|-------------|
| <b>Severity</b> | Info        |

Table 6-36 (Cont.) SCPRollbackSuccessful

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Conditions              | When any SCP microservice rollback is completed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.6006                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Description             | Alert is raised when any SCP microservice rollback is completed.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Recommended Actions     | <p><b>Cause:</b> When any SCP microservice rollback is completed.</p> <p><b>Diagnostic Information:</b> Not applicable.</p> <p><b>Recovery:</b> This alert is cleared automatically in 5 minutes when the customAlertExpiryEnabled parameter is set to false in the ocscp_values.yaml file. Otherwise, it is cleared after a specific duration as specified in the customAlertExpiryDuration parameter when the customAlertExpiryEnabled value is true. For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

### 6.3.33 ScpWorkerPodCpuUtilizationAboveWarnThreshold

Table 6-37 ScpWorkerPodCpuUtilizationAboveWarnThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | CPU utilization of SCP worker at warn level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Summary            | CPU utilization of SCP worker at warn level. namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }} and value = {{ \$value }}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Severity           | Warning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Condition          | This alert is raised when CPU utilization of SCP-Worker reaches the WARN level.<br>increase(ocscp_worker_pod_overload_control_cpu_utilization_total{ocscp_threshold_level="WARN"}[2m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.7018                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Metric Used        | ocscp_worker_pod_overload_control_cpu_utilization_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Recommended Action | <p><b>Cause:</b> When CPU utilization of scp-worker reaches the WARN level.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Get the configured threshold level values using Pod Overload Control Policy REST APIs. For more information about Pod Overload Control Policy, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>2. Check the CPU threshold level status from the scp-worker pod logs under the warn level.</li> </ol> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>• Reduce the incoming service request rate.</li> <li>• This alert is automatically cleared when CPU utilization is reduced to below WARN threshold level.</li> </ul> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.34 ScpWorkerPodCpuUtilizationAboveMinorThreshold

**Table 6-38 ScpWorkerPodCpuUtilizationAboveMinorThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | CPU utilization of SCP worker at minor level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Summary</b>            | CPU utilization of SCP worker at minor level. namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , timestamp: <code>{{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}</code> and value = <code>{{ \$value }}</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Severity</b>           | Minor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Condition</b>          | This alert is raised when CPU utilization of scp-worker reaches the MINOR level.<br><code>increase(ocscp_worker_pod_overload_control_cpu_utilization_total{ocs_cp_threshold_level="MINOR"}[2m]) &gt; 0</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.7019                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Metric Used</b>        | <code>ocscp_worker_pod_overload_control_cpu_utilization_total</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Recommended Action</b> | <p><b>Cause:</b> When CPU utilization of SCP-Worker reaches the MINOR level.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Get the configured threshold level values using Pod Overload Control Policy REST APIs. For more information about Pod Overload Control Policy, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>2. Check the CPU threshold level status from the scp-worker pod logs under the warn level.</li> </ol> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>• Reduce the incoming service request rate.</li> <li>• This alert is automatically cleared when CPU utilization is reduced to below MINOR threshold level.</li> </ul> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.35 ScpWorkerPodCpuUtilizationAboveMajorThreshold

**Table 6-39 ScpWorkerPodCpuUtilizationAboveMajorThreshold**

| Field              | Details                                                                                                                                                                                                                                                            |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | CPU utilization of SCP worker at major level                                                                                                                                                                                                                       |
| <b>Summary</b>     | Worker CPU utilization lead to major level. namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , timestamp: <code>{{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}</code> |
| <b>Severity</b>    | Major                                                                                                                                                                                                                                                              |
| <b>Condition</b>   | This alert is raised when CPU utilization of scp-worker reaches the MAJOR level.<br><code>increase(ocscp_worker_pod_overload_control_cpu_utilization_total{ocs_cp_threshold_level="MAJOR"}[2m]) &gt; 0</code>                                                      |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.7020                                                                                                                                                                                                                                    |
| <b>Metric Used</b> | <code>ocscp_worker_pod_overload_control_cpu_utilization_total</code>                                                                                                                                                                                               |

Table 6-39 (Cont.) ScpWorkerPodCpuUtilizationAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> When CPU utilization of SCP-Worker reaches the MAJOR level.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Get the configured threshold level values using Pod Overload Control Policy REST APIs. For more information about Pod Overload Control Policy, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>2. Check the CPU threshold level status from the scp-worker pod logs under the warn level.</li> </ol> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>• Reduce the incoming service request rate.</li> <li>• This alert is automatically cleared when CPU utilization is reduced to below MAJOR threshold level.</li> </ul> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

### 6.3.36 ScpWorkerPodCpuUtilizationAboveCriticalThreshold

Table 6-40 ScpWorkerPodCpuUtilizationAboveCriticalThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | CPU utilization of SCP worker at critical level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Summary            | Worker CPU utilization lead to critical level. namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , timestamp: <code>{{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Severity           | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Condition          | This alert is raised when CPU utilization of scp-worker reaches the CRITICAL level.<br><code>increase(ocscp_worker_pod_overload_control_cpu_utilization_total{ocscp_threshold_level="CRITICAL"}[2m]) &gt; 0</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.7021                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Metric Used        | ocscp_worker_pod_overload_control_cpu_utilization_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Recommended Action | <p><b>Cause:</b> When CPU utilization of scp-worker reaches the CRITICAL level.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Get the configured threshold level values using Pod Overload Control Policy REST APIs. For more information about Pod Overload Control Policy, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>2. Check the CPU threshold level status from the scp-worker pod logs under the warn level.</li> </ol> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>• Reduce the incoming service request rate.</li> <li>• This alert is automatically cleared when CPU utilization is reduced to below CRITICAL threshold level.</li> </ul> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.37 SCPUnhealthyPeerSCPDetected

**Table 6-41 SCPUnhealthyPeerSCPDetected**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | Next hop SCP is marked unhealthy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Summary</b>            | 'Next hop SCP is marked unhealthy. peerscp host: {{labels.peerScpName}}, scpFqdn: {{labels.scpFqdn}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }} and value = {{ \$value }}'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Severity</b>           | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Condition</b>          | This alert is raised when peer SCP is marked as unhealthy.<br>ocscp_peer_scp_unhealthy > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.7022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Metric Used</b>        | ocscp_peer_scp_unhealthy                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Recommended Action</b> | <p><b>Cause:</b> The peer SCP is marked as unhealthy because of consecutive failure responses.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Check transport failures and routing errors on the peer SCP.</li> <li>2. Run the ping command from primary or worker nodes using IP of Service.<br/>Sample command: ping &lt;IPAddress&gt;.</li> <li>3. If FQDN of service is used, run the ping command from inside the pod.</li> <li>4. If the pod does not support the ping command, get the debug container of SCP pod.</li> <li>5. If you do not want to use the ping command, collect tcpdump to establish the connection.<br/>Sample command: tcpdump -w capture.pcap -i &lt;pod interface&gt;</li> </ol> <p><b>Recovery:</b> This alert is automatically cleared after the degradation time is over. Degradation time = Number of consecutive degradations multiplied by configured base ejection.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.38 SCPDnsSrvQueryFailure

**Table 6-42 SCPDnsSrvQueryFailure**

| Field              | Details                                                                                                                                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | DNS SRV Query failed with cause {{labels.cause}}                                                                                                                                                                                  |
| <b>Summary</b>     | 'DNS SRV Query failed with cause {{labels.cause}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}' |
| <b>Severity</b>    | Critical                                                                                                                                                                                                                          |

Table 6-42 (Cont.) SCPDnsSrvQueryFailure

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Condition          | This alert is raised when the DNS server lookup for SRV fails due to network, servfail, or timed-out errors.<br>ocscp_alternate_resolution_dnssrv_rx_error_res == 1                                                                                                                                                                                                                                                                               |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.8001                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Metric Used        | ocscp_alternate_resolution_dnssrv_rx_error_res                                                                                                                                                                                                                                                                                                                                                                                                    |
| Recommended Action | <p><b>Cause:</b> When the dnsSRVAlternateRouting flag is set to true, if the DNS SRV lookup fails due to network, servfail, or timed-out errors.</p> <p><b>Diagnostic Information:</b> Check the DNS SRV server status and re-establish the status to normal.</p> <p><b>Recovery:</b> This alert is automatically cleared when SCP performs a successful DNS SRV query.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

### 6.3.39 SCPProducerOverloadThrottled

Table 6-43 SCPProducerOverloadThrottled

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | Producer is in Throttled Overload state                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Summary            | Producer is in Throttled Overload state.ocscp_peer_fqdn: {{labels.ocscp_peer_fqdn}}, ocscp_peer_nf_instance_id: {{labels.ocscp_peer_nf_instance_id}}, ocscp_peer_service_instance_id: {{labels.ocscp_peer_service_instance_id}}, scpfdn: {{labels.ocscp_fqdn}}, podname: {{labels.kubernetes_pod_name}}, namespace: {{labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Severity           | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Condition          | ocscp_load_manager_peer_load_throttled_threshold == 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.7023                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Metric Used        | ocscp_load_manager_peer_load_throttled_threshold                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Recommended Action | <p><b>Cause:</b> When the load of producer NF is higher than the throttled threshold configured for the service.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Check and configure the throttled threshold for each service using Routing Options REST APIs configurations as described in "Configuring Routing Options" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>2. Check the load for each service using the NF Profile REST APIs as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> </ol> <p><b>Recovery:</b> This alert clears automatically when the NF profile is deregistered or changed with load less than the throttled abatement threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |



## 6.3.40 SCPPProducerOverloadAlternateRouted

**Table 6-44 SCPPProducerOverloadAlternateRouted**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | Producer is in Alternate Route Overload state                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Summary</b>            | Producer is in Alternate Route Overload state.ocscp_peer_fqdn: {{labels.ocscp_peer_fqdn}}, ocscp_peer_nf_instance_id: {{labels.ocscp_peer_nf_instance_id}}, ocscp_peer_service_instance_id: {{labels.ocscp_peer_service_instance_id}}, scpfdn: {{labels.ocscp_fqdn}}, podname: {{labels.kubernetes_pod_name}}, namespace: {{labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Severity</b>           | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Condition</b>          | ocscp_load_manager_peer_load_alternateRoute_threshold == 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.7024                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Metric Used</b>        | ocscp_load_manager_peer_load_alternateRoute_threshold                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Recommended Action</b> | <p><b>Cause:</b> When the load of producer NF is higher than alternate routing threshold configured for the service.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Check and configure the alternate routing threshold for each service using Routing Options REST APIs configurations as described in "Configuring Routing Options" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> <li>2. Check the load for each service using the NF Profile REST APIs as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.</li> </ol> <p><b>Recovery:</b> This alert clears automatically when the NF profile is deregistered or changed with load less than the alternate routing abatement threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.41 SCPSeppNotConfigured

**Table 6-45 SCPSeppNotConfigured**

| Field              | Details                                                                                                                                                                                                                                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | SEPP is not configured for PLMN                                                                                                                                                                                                                                                                                     |
| <b>Summary</b>     | 'SEPP is not configured for PLMN'Summary: 'SEPP is not configured for PLMN. plmnid: {{labels.plmn_id}}, scpfdn: {{labels.scp_fqdn}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}' |
| <b>Severity</b>    | Major                                                                                                                                                                                                                                                                                                               |
| <b>Condition</b>   | This alert is raised when Security Edge Protection Proxy (SEPP) is not configured.<br>ocscp_metric_sepp_not_configured_current == 1                                                                                                                                                                                 |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.7025                                                                                                                                                                                                                                                                                     |

Table 6-45 (Cont.) SCPSeppNotConfigured

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Metric Used</b>        | cscp_metric_sepp_not_configured_current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Recommended Action</b> | <p><b>Cause:</b> When SEPP routing related rules are not configured at SCP for selected PLMN in the inter-PLMN routing.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Check whether SEPP profile is registered or SEPP related configuration is made at SCP.</li> <li>2. Verify the routing rules created for selected inter-PLMN in the PLMN_SEPP_MAPPING table.</li> </ol> <p><b>Recovery:</b> This alert clears automatically when the SEPP related routing rules are created at SCP for selected PLMN in the inter-PLMN routing.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.42 SCPSeppRoutingFailed

Table 6-46 SCPSeppRoutingFailed

| Field              | Details                                                                                                                                                                                                                                                                                 |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | Routing towards SEPP failed                                                                                                                                                                                                                                                             |
| <b>Summary</b>     | Routing towards SEPP failed. sepp_fqdn: {{\$labels.ocscp_sepp_fqdn}}, scpfqdn: {{\$labels.scp_fqdn}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }} |
| <b>Severity</b>    | Minor                                                                                                                                                                                                                                                                                   |
| <b>Condition</b>   | This alert is raised when routing towards SEPP fails.<br>ocscp_metric_sepp_routing_attempt_fail_current == 1                                                                                                                                                                            |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.7026                                                                                                                                                                                                                                                         |
| <b>Metric Used</b> | ocscp_metric_sepp_routing_attempt_fail_current                                                                                                                                                                                                                                          |

Table 6-46 (Cont.) SCPSeppRoutingFailed

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> Inter-PLMN routing failed for the selected SEPP instances.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Check whether selected SEPP is up and healthy.</li> <li>2. Check if selected SEPP is reachable.</li> <li>3. Use the ping command from primary or secondary nodes using IP of SEPP.<br/>Sample ping command is ping &lt;IpAddress&gt;</li> <li>4. If FQDN of SEPP is used, try ping command from inside the pod.</li> <li>5. Alternative to ping, collect tcpdump for ensuring proper connectivity.<br/>Sample command: tcpdump -w capture.pcap -i &lt;pod interface&gt;</li> <li>6. Check scp-worker logs for any error response from selected SEPP.<br/>If there are error responses, monitor selected SEPP logs by running this command: kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;</li> </ol> <p><b>Recovery:</b> This alert clears automatically when routing is successful for selected SEPP.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.43 SCPGlobalEgressRLRemoteParticipantConnectivityFailure

Table 6-47 SCPGlobalEgressRLRemoteParticipantConnectivityFailure

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | 'SCP Global Egress RL Remote Participant Connectivity Failure for participant                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Summary     | 'SCP Global Egress RL Remote Participant Connectivity Failure for participant: {{ \$labels.scp_remote_coh_cluster_name }}, scp_fqdn: {{ \$labels.scp_fqdn }}, scp_local_coh_cluster_name: {{ \$labels.scp_local_coh_cluster_name }}, scp_remote_coh_cluster_fqdn: {{ \$labels.scp_remote_coh_cluster_fqdn }}, scp_remote_coh_cluster_port: {{ \$labels.scp_remote_coh_cluster_port }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}' |
| Severity    | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Condition   | This alert is raised when the remote participant SCP connection is not established or goes down.<br>ocscp_global_egress_rl_remote_participant_connectivity_failure == 1                                                                                                                                                                                                                                                                                                                                                                                                       |
| OID         | 1.3.6.1.4.1.323.5.3.35.1.2.9001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Metric Used | ocscp_global_egress_rl_bucketkey_not_rate_controlled_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

Table 6-47 (Cont.) SCPGlobalEgressRLRemoteParticipantConnectivityFailure

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> When the remote participant SCP connection is not established or down.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Check whether the FQDN or IP port are properly configured with remote SCP's scp-cache microservice.</li> <li>2. Check whether clusterName and NFInstanceId are configured for the remote SCP.</li> <li>3. Check whether communication path is active between the two SCP's scp-cache microservice.</li> <li>4. Run the following command to monitor scp-cache logs: <code>kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;</code></li> </ol> <p><b>Recovery:</b> This alert clears automatically if the connection is established with the remote participant SCP.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.44 SCPGlobalEgressRLRemoteParticipantWithDuplicateNFInstanceId

Table 6-48 SCPGlobalEgressRLRemoteParticipantWithDuplicateNFInstanceId

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | This alert is raised when a duplicate remote coherence participant is found.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Summary     | SCP Global Egress RL Remote Participant Configured With Duplicate NFInstanceId for participant: {{ \$labels.scp_remote_coh_cluster_name }}, scp_fqdn: {{ \$labels.ocscp_fqdn }}, scp_nf_instance_id: {{ \$labels.scp_nf_instance_id }}, scp_local_coh_cluster_name: {{ \$labels.scp_local_coh_cluster_name }}, scp_remote_coh_cluster_fqdn: {{ \$labels.scp_remote_coh_cluster_fqdn }}, scp_remote_coh_cluster_port: {{ \$labels.scp_remote_coh_cluster_port }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{ end }} |
| Severity    | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Condition   | ocscp_global_egress_rl_remote_participant_is_duplicate == 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| OID         | 1.3.6.1.4.1.323.5.3.35.1.2.9002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Metric Used | ocscp_global_egress_rl_remote_participant_is_duplicate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

**Table 6-48 (Cont.) SCPGlobalEgressRLRemoteParticipantWithDuplicateNFInstanceId**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Recommended Action</b> | <p><b>Cause:</b> Duplicate configuration of remote coherence participants with local SCP.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Ensure Global Rate Limit feature is enabled.</li> <li>2. Check whether the clusterName and NFInstanceId of local SCPs and remote SCPs are not duplicates.</li> <li>3. Check whether the clusterName and NFInstanceId of the first remote SCP and the second remote SCP are not duplicates.</li> <li>4. Configure unique values for clusterName and NFInstanceId for local SCPs as well as remote SCPs.</li> </ol> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>This alert is cleared automatically if no duplicate configurations between local and remote SCPs are found.</li> </ul> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.45 SCPMediationConnectivityFailure

**Table 6-49 SCPMediationConnectivityFailure**

| Field              | Details                                                                                                                                                                                                                                              |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | 'SCP Mediation Connectivity Failed, scp_fqdn                                                                                                                                                                                                         |
| <b>Summary</b>     | 'SCP Mediation Connectivity Failed, scp_fqdn: {{\$labels.scp_fqdn}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{ end }' |
| <b>Severity</b>    | Major                                                                                                                                                                                                                                                |
| <b>Condition</b>   | This alert is raised when Mediation connection is not established or request to Mediation is not successful.<br>ocscp_mediation_http_not_reachable == 1                                                                                              |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.9002                                                                                                                                                                                                                      |
| <b>Metric Used</b> | ocscp_mediation_http_not_reachable                                                                                                                                                                                                                   |

Table 6-49 (Cont.) SCPMediationConnectivityFailure

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> The remote Mediation connection is not established or request to Mediation is not successful.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Check the errors of the <code>ocscp_mediation_http_not_reachable</code> metric on the Grafana dashboard.</li> <li>2. Run the following command to check the status of the mediation pod: <pre>kubectl get pods -n &lt;namespace&gt;</pre> </li> </ol> <p><b>Recovery:</b></p> <ol style="list-style-type: none"> <li>1. If the mediation pod is not in the ready state, run the following command to check the scp-mediation logs: <pre>kubectl logs &lt;pod name&gt; -n &lt;namespace&gt;</pre> </li> <li>2. If the mediation pod is absent, then redeploy or upgrade SCP with <code>mediationService</code> set to <code>true</code>.</li> </ol> <p>This alert clears automatically when the connection is established with Mediation when Mediation is invoked from any of the trigger points.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.46 SCPNotificationQueuesUtilizationAboveMinorThreshold

Table 6-50 SCPNotificationQueuesUtilizationAboveMinorThreshold

| Field       | Details                                                                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Notification Queues Utilization Above Minor Threshold'                                                                                           |
| Summary     | 'SCP Notification Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}' |
| Severity    | Minor                                                                                                                                                                                                                                                                               |
| Condition   | This alert is raised when the queues in the notification service are utilized above 65% of the maximum size (user configure minor threshold value).<br><code>ocscp_notification_queue_alert{severity="MINOR"} == 1</code>                                                           |
| OID         | 1.3.6.1.4.1.323.5.3.35.1.2.3009                                                                                                                                                                                                                                                     |
| Metric Used | <code>ocscp_notification_queue_alert</code>                                                                                                                                                                                                                                         |

Table 6-50 (Cont.) SCPNotificationQueuesUtilizationAboveMinorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> The Notification module is getting more traffic than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor Notification traffic to pod using the KPI dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard:<br/>ocscp_notification_queue_utilization</li> </ol> <p><b>Recovery:</b> This alert clears automatically when notification traffic goes below minor threshold or exceeds major threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.47 SCPNotificationQueuesUtilizationAboveMajorThreshold

Table 6-51 SCPNotificationQueuesUtilizationAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'instancetype: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Notification Queues Utilization Above Major Threshold'                                                                                                                                                                                                                                                                                                                                                                                              |
| Summary            | 'SCP Notification Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{ end }'                                                                                                                                                                                                                                                                                                       |
| Severity           | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Condition          | This alert is raised when the queues in the notification service is utilized above 75% of the maximum size (user configure major threshold value).<br>ocscp_notification_queue_alert{severity="MAJOR"} == 1                                                                                                                                                                                                                                                                                                                                                                            |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.3009                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Metric Used        | ocscp_notification_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Recommended Action | <p><b>Cause:</b> The Notification module is getting more traffic than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor Notification traffic to pod using the KPI dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard:<br/>ocscp_notification_queue_utilization</li> </ol> <p><b>Recovery:</b> This alert clears automatically when notification traffic goes below major threshold or above critical major threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.48 SCPNotificationQueuesUtilizationAboveCriticalThreshold

**Table 6-52 SCPNotificationQueuesUtilizationAboveCriticalThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Notification Queues Utilization Above Critical Threshold'                                                                                                                                                                                                                                                                                                                                                            |
| <b>Summary</b>            | 'SCP Notification Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                  |
| <b>Severity</b>           | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Condition</b>          | This alert is raised when the queues in notification service are utilized above 85% of the maximum size (user configure critical threshold value).<br>ocscp_notification_queue_alert{severity="CRITICAL"} == 1                                                                                                                                                                                                                                                                                                                                          |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.3009                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Metric Used</b>        | ocscp_notification_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Recommended Action</b> | <p><b>Cause:</b> The Notification module is getting more traffic than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor Notification traffic to pod using the KPI dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard:<br/>ocscp_notification_queue_utilization</li> </ol> <p><b>Recovery:</b> This alert clears automatically when notification traffic goes below critical threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.49 SCPNrfProxyQueuesUtilizationAboveMinorThreshold

**Table 6-53 SCPNrfProxyQueuesUtilizationAboveMinorThreshold**

| Field              | Details                                                                                                                                                                                                                                                                         |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Nrfproxy Queues Utilization Above Minor Threshold'                                                                                           |
| <b>Summary</b>     | 'SCP Nrfproxy Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}' |
| <b>Severity</b>    | Minor                                                                                                                                                                                                                                                                           |
| <b>Condition</b>   | This alert is raised when the task queues in scp-nrfproxy service are utilized above 65% of the maximum size (user configure minor threshold value).<br>ocscp_nrfproxy_queue_alert{severity="MINOR"} == 1                                                                       |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.9010                                                                                                                                                                                                                                                 |
| <b>Metric Used</b> | ocscp_nrfproxy_queue_alert                                                                                                                                                                                                                                                      |



Table 6-53 (Cont.) SCPNrfProxyQueuesUtilizationAboveMinorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> NrfProxy task queues are getting filled and the traffic is more than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards nrfProxy to pod using the KPI dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard:<br/>ocscp_nrfproxy_queue_utilization</li> </ol> <p><b>Recovery:</b> This alert clears automatically when the traffic goes below minor threshold or above major threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

### 6.3.50 SCPNrfProxyQueuesUtilizationAboveMajorThreshold

Table 6-54 SCPNrfProxyQueuesUtilizationAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'instancetype: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Nrfproxy Queues Utilization Above Major Threshold'                                                                                                                                                                                                                                                                                                                                                                                                   |
| Summary            | 'SCP Nrfproxy Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                                          |
| Severity           | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Condition          | This alert is raised when the task queues in scp-nrfproxy service are utilized above 75% of the maximum size (user configure major threshold value).<br>ocscp_nrfproxy_queue_alert{severity="MAJOR"} == 1                                                                                                                                                                                                                                                                                                                                                                               |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Metric Used        | ocscp_nrfproxy_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Recommended Action | <p><b>Cause:</b> NrfProxy task queues are getting filled and the traffic is more than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards nrfProxy to pod using the KPI dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard:<br/>ocscp_nrfproxy_queue_utilization</li> </ol> <p><b>Recovery:</b> This alert clears automatically when the traffic goes below major threshold or above critical threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.51 SCPNrfProxyQueuesUtilizationAboveCriticalThreshold

**Table 6-55 SCPNrfProxyQueuesUtilizationAboveCriticalThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Nrfproxy Queues Utilization Above Critical Threshold'                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Summary</b>            | 'SCP Nrfproxy Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                             |
| <b>Severity</b>           | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Condition</b>          | This alert is raised when the task queues in scp-nrfproxy service are utilized above 85% of the maximum size (user configure critical threshold value).<br>ocscp_nrfproxy_queue_alert{severity="CRITICAL"} == 1                                                                                                                                                                                                                                                                                                                                                |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.9010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Metric Used</b>        | ocscp_nrfproxy_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Recommended Action</b> | <p><b>Cause:</b> NrfProxy task queues are getting filled and the traffic is more than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards nrfProxy to pod using the KPI dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard:<br/>ocscp_nrfproxy_queue_utilization</li> </ol> <p><b>Recovery:</b> This alert clears automatically when the traffic goes below critical threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.52 SCPWorkerQueuesUtilizationAboveMinorThreshold

**Table 6-56 SCPWorkerQueuesUtilizationAboveMinorThreshold**

| Field              | Details                                                                                                                                                                                                                                                                       |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Worker Queues Utilization Above Minor Threshold'                                                                                           |
| <b>Summary</b>     | 'SCP Worker Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}' |
| <b>Severity</b>    | Minor                                                                                                                                                                                                                                                                         |
| <b>Condition</b>   | This alert is raised when task queues in scp-worker service are utilized above 65% of the maximum size (user configure minor threshold value).<br>ocscp_worker_queue_alert{severity="MINOR"} == 1                                                                             |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.9007                                                                                                                                                                                                                                               |
| <b>Metric Used</b> | ocscp_worker_queue_alert                                                                                                                                                                                                                                                      |

Table 6-56 (Cont.) SCPWorkerQueuesUtilizationAboveMinorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> Worker task queues are getting filled and the traffic is more than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards nrfProxy to pod using the KPI dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard:<br/>ocscp_worker_queue_utilization</li> </ol> <p><b>Recovery:</b> This alert clears automatically when the traffic goes below minor threshold or above major threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

### 6.3.53 SCPWorkerQueuesUtilizationAboveMajorThreshold

Table 6-57 SCPWorkerQueuesUtilizationAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'instancetype: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Worker Queues Utilization Above Major Threshold'                                                                                                                                                                                                                                                                                                                                                                                                      |
| Summary            | 'SCP Worker Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{ end }{'                                                                                                                                                                                                                                                                                                              |
| Severity           | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Condition          | This alert is raised when task queues in scp-worker service are utilized above 75% of the maximum size (user configure major threshold value).<br>ocscp_worker_queue_alert{severity="MAJOR"} == 1                                                                                                                                                                                                                                                                                                                                                                                        |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9007                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Metric Used        | ocscp_worker_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Recommended Action | <p><b>Cause:</b> Worker task queues are getting filled and the traffic is more than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards nrfProxy to pod using the KPI dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard:<br/>ocscp_worker_queue_utilization</li> </ol> <p><b>Recovery:</b> This alert clears automatically when the traffic goes below major threshold or goes above critical threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.54 SCPWorkerQueuesUtilizationAboveCriticalThreshold

**Table 6-58 SCPWorkerQueuesUtilizationAboveCriticalThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Worker Queues Utilization Above Critical Threshold'                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Summary</b>            | 'SCP Worker Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                           |
| <b>Severity</b>           | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Condition</b>          | This alert is raised when task queues in scp-worker service are utilized above 85% of the maximum size (user configure critical threshold value).<br>ocscp_worker_queue_alert{severity="CRITICAL"} == 1                                                                                                                                                                                                                                                                                                                                                    |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.9007                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Metric Used</b>        | ocscp_worker_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Recommended Action</b> | <p><b>Cause:</b> Worker task queues are getting filled and the traffic is more than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards nrfProxy to pod using the KPI dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard:<br/>ocscp_worker_queue_utilization</li> </ol> <p><b>Recovery:</b> This alert clears automatically when the traffic goes below critical threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.55 SCPCacheQueuesUtilizationAboveMinorThreshold

**Table 6-59 SCPCacheQueuesUtilizationAboveMinorThreshold**

| Field              | Details                                                                                                                                                                                                                                                                      |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Cache Queues Utilization Above Minor Threshold'                                                                                           |
| <b>Summary</b>     | 'SCP Cache Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}' |
| <b>Severity</b>    | Minor                                                                                                                                                                                                                                                                        |
| <b>Condition</b>   | This alert is raised when the task queues in the scp-cache service are utilized above 65% of their maximum size (the user-configured minor threshold value).<br>ocscp_cache_queue_alert{severity="MINOR"} == 1                                                               |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.13000                                                                                                                                                                                                                                             |
| <b>Metric Used</b> | ocscp_cache_queue_alert                                                                                                                                                                                                                                                      |

Table 6-59 (Cont.) SCPCacheQueuesUtilizationAboveMinorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> When the cache task queues are getting filled, and traffic is higher than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards the cache pod using the KPI Dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard: ocsdp_cache_queue_utilization.</li> </ol> <p><b>Recovery:</b> The alert is cleared automatically when minor threshold or goes above major threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.56 SCPCacheQueuesUtilizationAboveMajorThreshold

Table 6-60 SCPCacheQueuesUtilizationAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Cache Queues Utilization Above Major Threshold'                                                                                                                                                                                                                                                                                                                                                                                                            |
| Summary            | SCP Cache Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}                                                                                                                                                                                                                                                                                                                     |
| Severity           | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Condition          | This alert is raised when the task queues in the scp-cache service are utilized above 75% of their maximum size (the user-configured major threshold value).<br>ocsdp_cache_queue_alert{severity="MAJOR"} == 1                                                                                                                                                                                                                                                                                                                                                                                |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.13000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Metric Used        | ocsdp_cache_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Recommended Action | <p><b>Cause:</b> When the cache task queues are getting filled, and traffic is higher than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards the cache pod using the KPI Dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard: ocsdp_cache_queue_utilization.</li> </ol> <p><b>Recovery:</b> The alert is cleared automatically when traffic falls below a major threshold or goes above a critical threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.57 SCPCacheQueuesUtilizationAboveCriticalThreshold

**Table 6-61 SCPCacheQueuesUtilizationAboveCriticalThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Cache Queues Utilization Above Critical Threshold'                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Summary</b>            | 'SCP Cache Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                               |
| <b>Severity</b>           | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Condition</b>          | This alert is raised when the task queues in the scp-cache service are utilized above 85% of their maximum size (the user-configured critical threshold value).<br>ocscp_cache_queue_alert{severity="CRITICAL"} == 1                                                                                                                                                                                                                                                                                                                                          |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.13000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Metric Used</b>        | ocscp_cache_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Recommended Action</b> | <p><b>Cause:</b> When the cache task queues are getting filled, and traffic is higher than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards the cache pod using the KPI Dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard: ocscp_cache_queue_utilization.</li> </ol> <p><b>Recovery:</b> The alert is cleared automatically when traffic falls below a critical threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.58 SCPLoadManagerQueuesUtilizationAboveMinorThreshold

**Table 6-62 SCPLoadManagerQueuesUtilizationAboveMinorThreshold**

| Field              | Details                                                                                                                                                                                                                                                                            |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Load Manage Queues Utilization Above Minor Threshold'                                                                                           |
| <b>Summary</b>     | SCP Load Manager Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}' |
| <b>Severity</b>    | Minor                                                                                                                                                                                                                                                                              |
| <b>Condition</b>   | This alert is raised when the task queues in the scp-load-manager service are utilized above 65% of their maximum size (the user-configured major threshold value).<br>ocscp_load_manager_queue_alert{severity="MINOR"}                                                            |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.11000                                                                                                                                                                                                                                                   |
| <b>Metric Used</b> | ocscp_load_manager_queue_alert                                                                                                                                                                                                                                                     |

Table 6-62 (Cont.) SCPLoadManagerQueuesUtilizationAboveMinorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> When the cache task queues are getting filled, and traffic is higher than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards the cache pod using the KPI Dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard: <code>ocscp_load_manager_queue_utilization</code>.</li> </ol> <p><b>Recovery:</b> The alert is cleared automatically when traffic falls below a minor threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.59 SCPLoadManagerQueuesUtilizationAboveMajorThreshold

Table 6-63 SCPLoadManagerQueuesUtilizationAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Load Manage Queues Utilization Above Major Threshold'                                                                                                                                                                                                                                                                                                                                                                                       |
| Summary            | 'SCP Load Manager Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                             |
| Severity           | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Condition          | This alert is raised when the task queues in the scp-load-manager service are utilized above 75% of their maximum size (the user-configured major threshold value).<br><code>ocscp_load_manager_queue_alert{severity="MAJOR"} == 1</code>                                                                                                                                                                                                                                                                                                                                      |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.11000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Metric Used        | <code>ocscp_load_manager_queue_alert</code>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Recommended Action | <p><b>Cause:</b> When the cache task queues are getting filled, and traffic is higher than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards the cache pod using the KPI Dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard: <code>ocscp_load_manager_queue_utilization</code>.</li> </ol> <p><b>Recovery:</b> The alert is cleared automatically when traffic falls below a major threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.60 SCPLoadManagerQueuesUtilizationAboveCriticalThreshold

**Table 6-64 SCPLoadManagerQueuesUtilizationAboveCriticalThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Load Manager Queues Utilization Above Critical Threshold'                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Summary</b>            | 'SCP Load Manager Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                               |
| <b>Severity</b>           | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Condition</b>          | This alert is raised when the task queues in the scp-load-manager service are utilized above 85% of their maximum size (the user-configured critical threshold value).<br>ocscp_load_manager_queue_alert{severity="CRITICAL"} == 1                                                                                                                                                                                                                                                                                                                                   |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.11000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Metric Used</b>        | ocscp_load_manager_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Recommended Action</b> | <p><b>Cause:</b> When the cache task queues are getting filled, and traffic is higher than expected.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Monitor traffic towards the cache pod using the KPI Dashboard.</li> <li>2. Refer to rate of the following metric on the Grafana dashboard: ocscp_load_manager_queue_utilization.</li> </ol> <p><b>Recovery:</b> The alert is cleared automatically when traffic falls below a critical threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.61 SCPProducerNfSetUnhealthy

**Table 6-65 SCPProducerNfSetUnhealthy**

| Field              | Details                                                                                                                                                                                                                                                                                |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | All producer NFs in NF set are marked unhealthy                                                                                                                                                                                                                                        |
| <b>Summary</b>     | Summary: 'All producer NFs in NF set are marked unhealthy. nfSet: {{\$labels.ocscp_nf_setid}}, scpFqdn: {{\$labels.scp_fqdn}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}' |
| <b>Severity</b>    | Info                                                                                                                                                                                                                                                                                   |
| <b>Condition</b>   | This alert is raised when all producer NFs in an NF Set are marked unhealthy.<br>ocscp_metric_nf_set_unhealthy == 1                                                                                                                                                                    |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.7027                                                                                                                                                                                                                                                        |
| <b>Metric Used</b> | ocscp_metric_nf_set_unhealthy                                                                                                                                                                                                                                                          |



Table 6-65 (Cont.) SCPProducerNfSetUnhealthy

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> All the producer NFs are marked unhealthy because of consecutive failure responses.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Check transport failures and routing errors on producer NFs.</li> <li>2. Run the ping command from primary or secondary nodes using IP of Service. Sample command: ping &lt;IPAddress&gt;.</li> <li>3. If FQDN of service is used, run the ping command from inside the pod.</li> <li>4. If the pod does not support the ping command, get the debug container of SCP pod.</li> <li>5. If you do not want to use the ping command, collect tcpdump to establish the connection. Sample command: tcpdump -w capture.pcap -i &lt;pod interface&gt;</li> </ol> <p><b>Recovery:</b> This alert is automatically cleared after the degradation time is over. Degradation time = Number of consecutive degradations multiplied by configured base ejection.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.62 SCPPeerSeppUnhealthy

Table 6-66 SCPPeerSeppUnhealthy

| Field       | Details                                                                                                                                                                                                                                            |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Peer Sepp is marked unhealthy                                                                                                                                                                                                                      |
| Summary     | Peer Sepp is marked unhealthy. seppFqdn: {{labels.ocscp_sepp_fqdn}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }} |
| Severity    | Info                                                                                                                                                                                                                                               |
| Condition   | ocscp_sepp_unhealthy == 1                                                                                                                                                                                                                          |
| OID         | 1.3.6.1.4.1.323.5.3.35.1.2.7028                                                                                                                                                                                                                    |
| Metric Used | ocscp_sepp_unhealthy                                                                                                                                                                                                                               |

Table 6-66 (Cont.) SCPPeerSeppUnhealthy

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> The peer SEPP is marked unhealthy because of consecutive failure responses.</p> <p><b>Diagnostic Information:</b></p> <ol style="list-style-type: none"> <li>1. Check transport failures and routing errors on peer SCP.</li> <li>2. Run the ping command from primary or secondary nodes using IP of Service.<br/>Sample command: ping &lt;IPAddress&gt;.</li> <li>3. If FQDN of service is used, run the ping command from inside the pod.</li> <li>4. If the pod does not support the ping command, get the debug container of SCP pod.</li> <li>5. If you do not want to use the ping command, collect tcpdump to establish the connection.<br/>Sample command: tcpdump -w capture.pcap -i &lt;pod interface&gt;</li> </ol> <p><b>Recovery:</b> This alert is automatically cleared after the degradation time is over. Degradation time = Number of consecutive degradations multiplied by configured base ejection.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.63 SCPMicroServiceUnreachable

Table 6-67 SCPMicroServiceUnreachable

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}: SCP communication between the micro-services indicated by source and destination has failed'                                                                                                                                                                                                                   |
| Summary            | Summary: 'SCP communication between the micro-services indicated by source and destination has failed: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, source:{{\$labels.source}}, destination: {{\$labels.destination}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{ end }{'                                                             |
| Severity           | Critical                                                                                                                                                                                                                                                                                                                                                                                                           |
| Condition          | This alert is raised when the communication between SCP microservices indicated by source and destination has failed.<br>ocscp_metric_svc_unreachable==1                                                                                                                                                                                                                                                           |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.7029                                                                                                                                                                                                                                                                                                                                                                                    |
| Metric Used        | ocscp_metric_svc_unreachable                                                                                                                                                                                                                                                                                                                                                                                       |
| Recommended Action | <p><b>Cause:</b> Communication between SCP microservices has failed.</p> <p><b>Diagnostic Information:</b> Verify whether endpoints of all the services are in Running and Ready state. If not, restart the services.</p> <p><b>Recovery:</b> This alert clears automatically when the required services are in Running and Ready state.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.64 SCPTrafficFeedSendFailed

Table 6-68 SCPTrafficFeedSendFailed

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | Sending messages to Traffic Feed failed. Cause : {{\$labels.ocscp_cause}}                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Summary            | Sending messages to Traffic Feed failed, cause: {{\$labels.ocscp_cause}}, scp_fqdn: {{\$labels.ocscp_fqdn}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}                                                                                                                                                                                                                        |
| Severity           | Minor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Condition          | increase(ocscp_metric_trafficfeed_failed_total{app_kubernetes_io_name="scp-worker"}[1h]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                          |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Metric Used        | ocscp_metric_trafficfeed_failed_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Recommended Action | <p><b>Cause:</b> Sending of message to traffic feed failed.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>• Check failure reason.</li> <li>• Check if the traffic feed OCNADD configuration is correct.</li> <li>• Check if the OCNADD server is reachable and available.</li> </ul> <p><b>Recovery:</b> This alert clears automatically after 24 hrs if sending messages to traffic feed stops failing.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.65 SCPTrafficFeedKafkaClusterUnhealthy

Table 6-69 SCPTrafficFeedKafkaClusterUnhealthy

| Field              | Details                                                                                                                                                                                                                                                                                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'Kafka cluster is marked unhealthy, Cause : {{\$labels.ocscp_cause}}'                                                                                                                                                                                                                                                                                               |
| Summary            | 'Kafka cluster is marked unhealthy, cause: {{\$labels.ocscp_cause}}, scp_fqdn: {{\$labels.ocscp_fqdn}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                          |
| Severity           | Critical                                                                                                                                                                                                                                                                                                                                                            |
| Condition          | This alert is raised when the Kafka cluster is unhealthy.<br>ocscp_metric_trafficfeed_cluster_unhealthy == 1                                                                                                                                                                                                                                                        |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9026                                                                                                                                                                                                                                                                                                                                     |
| Metric Used        | ocscp_metric_trafficfeed_cluster_unhealthy                                                                                                                                                                                                                                                                                                                          |
| Recommended Action | <p><b>Cause:</b> The Kafka cluster is unhealthy.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>• Check and diagnose OCNADD Kafka cluster.</li> </ul> <p><b>Recovery:</b> This alert clears when the Kafka cluster recovers from the failure condition.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.66 SCPTrafficFeedPartitionUnhealthy

Table 6-70 SCPTrafficFeedPartitionUnhealthy

| Field              | Details                                                                                                                                                                                                                                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'Kafka partition {{labels.kafka_partition_id}} is marked unhealthy, Cause : {{labels.ocscp_cause}}'                                                                                                                                                                                                                                              |
| Summary            | 'Kafka cluster is marked unhealthy, cause: {{labels.ocscp_cause}}, partition_id: {{labels.kafka_partition_id}}, topic: {{labels.topic}}, scp_fqdn: {{labels.ocscp_fqdn}}, namespace: {{labels.namespace}}, podname: {{labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'    |
| Severity           | Major                                                                                                                                                                                                                                                                                                                                            |
| Condition          | This alert is raised when the Kafka partition is unhealthy.<br>ocscp_metric_trafficfeed_partition_unhealthy == 1                                                                                                                                                                                                                                 |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9025                                                                                                                                                                                                                                                                                                                  |
| Metric Used        | ocscp_metric_trafficfeed_partition_unhealthy                                                                                                                                                                                                                                                                                                     |
| Recommended Action | <b>Cause:</b> The Kafka partition is unhealthy.<br><b>Diagnostic Information:</b> <ul style="list-style-type: none"> <li>Check and diagnose OCNADD Kafka cluster.</li> </ul> <b>Recovery:</b> This alert clears when the Kafka partition recovers from the failure condition.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.67 SCPServiceMeshFailure

Table 6-71 SCPServiceMeshFailure

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | 'SCP servicemesh failure encountered'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Summary     | 'SCP servicemesh failure encountered for nfservicetype: {{labels.ocscp_nf_service_type}}, nftype: {{labels.ocscp_nf_type}}, nfinstanceid: {{labels.ocscp_nf_instance_id}}, serviceinstanceid: {{labels.ocscp_service_instance_id}}, producerfqdn: {{labels.ocscp_producer_host}}, responsecode: {{labels.ocscp_response_code}}, serverheader: {{labels.ocscp_server_header}}, namespace: {{labels.namespace}}, podname: {{labels.pod}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'SeverityInfo |
| Severity    | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Condition   | This alert is raised when service mesh failure occurs.<br>increase(ocscp_metric_sidecarproxy_failures_total[2m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                          |
| OID         | 1.3.6.1.4.1.323.5.3.35.1.2.7030                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Metric Used | ocscp_metric_sidecarproxy_failures_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

Table 6-71 (Cont.) SCPServiceMeshFailure

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> Service mesh failure observed at SCP.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Service mesh is unable to reach peer NF due to connection failures or host is not known to service mesh or some other errors at service mesh.</li> <li>Verify the service mesh logs to detect error details.</li> <li>Check sidecar status of peer NF.</li> </ul> <p><b>Recovery:</b> This alert clears automatically after 2 minutes if there is no service mesh failure observed by SCP with the same dimensions.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.68 SCPHealthCheckFailedForPeerSCP

Table 6-72 SCPHealthCheckFailedForPeerSCP

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'SCP HealthCheck failed for peer SCP'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Summary            | 'SCP HealthCheck failed for peer SCP. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                                                                                                                               |
| Severity           | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Condition          | This alert is raised when peer SCP or inter-SCP becomes unhealthy due to health check status and outlier detection.<br>ocscp_interscp_health_check_status_failed == 1                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9023                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Metric Used        | ocscp_interscp_health_check_status_failed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Recommended Action | <p><b>Cause:</b> When peer SCP is unhealthy to receive any SBI message requests due to health check and outlier detection.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Monitor if the overall average load of peer SCP is greater than the configured threshold value.</li> <li>Check outlier detection.</li> </ul> <p><b>Recovery:</b> This alert clears automatically if SCP-C decides SCP-P is healthy or available based on the current and previous status of outlier detection and health check.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.69 SCPHealthCheckFailed

Table 6-73 SCPHealthCheckFailed

| Field       | Details                                                                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | 'SCP HealthCheck failed'                                                                                                                                                                                   |
| Summary     | 'SCP HealthCheck failed. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}' |

Table 6-73 (Cont.) SCPHealthCheckFailed

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity           | Info                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Condition          | This alert is raised when SCP is unhealthy because the overall average load of SCP is greater than the configured threshold.<br>ocscp_health_check_status_failed == 1                                                                                                                                                                                                                                                                          |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9024                                                                                                                                                                                                                                                                                                                                                                                                                |
| Metric Used        | ocscp_health_check_status_failed                                                                                                                                                                                                                                                                                                                                                                                                               |
| Recommended Action | <b>Cause:</b> When SCP is unhealthy to receive any SBI message requests due to the overall average load.<br><b>Diagnostic Information:</b> Monitor if the overall average load of SCP is greater than the configured threshold value.<br><b>Recovery:</b> This alert clears automatically when the overall average load of SCP is less than the configured threshold value.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.70 ScpWorkerPodPendingTransUtilizationAboveWarnThreshold

Table 6-74 ScpWorkerPodPendingTransUtilizationAboveWarnThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | Worker Pending Transaction lead to Warn level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Summary            | 'Worker Pending Transaction lead to warn level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                                                                                                                               |
| Severity           | Warn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Condition          | This alert is raised when pending transaction utilization of SCP-Worker reaches WARN level.<br>ocscp_worker_pod_overload_control_pendingTrans_utilization_warn > 0                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Metric Used        | ocscp_worker_pod_overload_control_pendingTrans_utilization_warn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Recommended Action | <b>Cause:</b> When pending transactions utilization of SCP-Worker reaches WARN level.<br><b>Diagnostic Information:</b> <ul style="list-style-type: none"> <li>Monitor pending transactions usage while processing traffic. The threshold value of warn pending transaction utilization can be checked from database.</li> <li>Check WARN level logs of SCP-Worker for pending transaction status.</li> </ul> <b>Recovery:</b> This alert clears automatically when pending transaction utilization is below WARN threshold level.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.71 ScpWorkerPodPendingTransUtilizationAboveMinorThreshold

Table 6-75 ScpWorkerPodPendingTransUtilizationAboveMinorThreshold

| Field       | Details                                        |
|-------------|------------------------------------------------|
| Description | Worker Pending Transaction lead to minor level |

Table 6-75 (Cont.) ScpWorkerPodPendingTransUtilizationAboveMinorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Summary            | 'Worker Pending Transaction lead to minor level.namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                                                                                                                                   |
| Severity           | Minor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Condition          | This alert is raised when pending transaction utilization of SCP-Worker reaches MINOR level.<br>ocscp_worker_pod_overload_control_pendingTrans_utilization_minor > 0                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Metric Used        | ocscp_worker_pod_overload_control_pendingTrans_utilization_minor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Recommended Action | <b>Cause:</b> When pending transactions utilization of SCP-Worker reaches MINOR level.<br><b>Diagnostic Information:</b> <ul style="list-style-type: none"> <li>Monitor pending transactions usage while processing traffic. The threshold value of minor pending transaction utilization can be checked from database.</li> <li>Check MINOR level logs of SCP-Worker for pending transaction status.</li> </ul> <b>Recovery:</b> This alert clears automatically when pending transaction utilization is below MINOR threshold level.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.72 ScpWorkerPodPendingTransUtilizationAboveMajorThreshold

Table 6-76 ScpWorkerPodPendingTransUtilizationAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | Worker Pending Transaction lead to major level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Summary            | Worker Pending Transaction lead to major level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                                                                                                                                   |
| Severity           | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Condition          | This alert is raised when pending transaction utilization of SCP-Worker reaches MAJOR level.<br>ocscp_worker_pod_overload_control_pendingTrans_utilization_major > 0                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Metric Used        | ocscp_worker_pod_overload_control_pendingTrans_utilization_major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Recommended Action | <b>Cause:</b> When pending transactions utilization of SCP-Worker reaches MAJOR level.<br><b>Diagnostic Information:</b> <ul style="list-style-type: none"> <li>Monitor pending transactions usage while processing traffic. The threshold value of major pending transaction utilization can be checked from database.</li> <li>Check MAJOR level logs of SCP-Worker for pending transaction status.</li> </ul> <b>Recovery:</b> This alert clears automatically when pending transaction utilization is below MAJOR threshold level.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.73 ScpWorkerPodPendingTransUtilizationAboveCriticalThreshold

**Table 6-77 ScpWorkerPodPendingTransUtilizationAboveCriticalThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | Worker Pending Transaction lead to critical level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Summary</b>            | 'Worker Pending Transaction lead to critical level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Severity</b>           | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Condition</b>          | This alert is raised when pending transaction utilization of SCP-Worker reaches CRITICAL level.<br>ocscp_worker_pod_overload_control_pendingTrans_utilization_critical > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.9014                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Metric Used</b>        | ocscp_worker_pod_overload_control_pendingTrans_utilization_critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Recommended Action</b> | <p><b>Cause:</b> When pending transactions utilization of SCP-Worker reaches CRITICAL level.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Monitor pending transactions usage while processing traffic. The threshold value of critical pending transaction utilization can be checked from database.</li> <li>Check CRITICAL level logs of SCP-Worker for pending transaction status.</li> </ul> <p><b>Recovery:</b> This alert clears automatically when pending transaction utilization is below CRITICAL threshold level.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.74 ScpWorkerPodResourceUtilizationAboveMinorThreshold

**Table 6-78 ScpWorkerPodResourceUtilizationAboveMinorThreshold**

| Field              | Details                                                                                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | Worker overload control lead to minor level                                                                                                                                                         |
| <b>Summary</b>     | 'Worker overload control lead to minor level.namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}' |
| <b>Severity</b>    | Minor                                                                                                                                                                                               |
| <b>Condition</b>   | This alert is raised when overload control resource utilization of SCP-Worker reaches MINOR level.<br>ocscp_worker_pod_overload_control_resource_utilization_minor > 0                              |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.9018                                                                                                                                                                     |
| <b>Metric Used</b> | ocscp_worker_pod_overload_control_resource_utilization_minor                                                                                                                                        |



Table 6-78 (Cont.) ScpWorkerPodResourceUtilizationAboveMinorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> When overload control resource utilization of SCP-Worker reaches MINOR level.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Monitor pending transactions usage while processing traffic. The threshold value of minor overload control resource utilization can be checked from database.</li> <li>Check MINOR level logs of SCP-Worker for overload control resource utilization status.</li> </ul> <p><b>Recovery:</b> This alert clears automatically when overload control resource utilization is below MINOR threshold level.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.75 ScpWorkerPodResourceUtilizationAboveMajorThreshold

Table 6-79 ScpWorkerPodResourceUtilizationAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | Worker overload control lead to major level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Summary            | 'Worker overload control lead to major level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Severity           | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Condition          | This alert is raised when overload control resource utilization of SCP-Worker reaches MAJOR level.<br>ocscp_worker_pod_overload_control_resource_utilization_major > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9018                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Metric Used        | ocscp_worker_pod_overload_control_resource_utilization_major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Recommended Action | <p><b>Cause:</b> When overload control resource utilization of SCP-Worker reaches MAJOR level.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Monitor pending transactions usage while processing traffic. The threshold value of major overload control resource utilization can be checked from database.</li> <li>Check MAJOR level logs of SCP-Worker for overload control resource utilization status.</li> </ul> <p><b>Recovery:</b> This alert clears automatically when overload control resource utilization is below MAJOR threshold level.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.76 ScpWorkerPodResourceUtilizationAboveWarnThreshold

Table 6-80 ScpWorkerPodResourceUtilizationAboveWarnThreshold

| Field       | Details                                                                                                                                                                                             |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | 'Worker overload control lead to Warn level'                                                                                                                                                        |
| Summary     | 'Worker overload control lead to warn level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}' |

Table 6-80 (Cont.) ScpWorkerPodResourceUtilizationAboveWarnThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity           | Warning                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Condition          | This alert is raised when overload control resource utilization of SCP-Worker reaches WARN level.<br>ocscp_worker_pod_overload_control_resource_utilization_warn > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9018                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Metric Used        | ocscp_worker_pod_overload_control_resource_utilization_warn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Recommended Action | <p><b>Cause:</b> When overload control resource utilization of SCP-Worker reaches WARN level.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Monitor pending transactions usage while processing traffic. The threshold value of warn overload control resource utilization can be checked from database.</li> <li>Check WARN level logs of SCP-Worker for overload control resource utilization status.</li> </ul> <p><b>Recovery:</b> This alert clears automatically when overload control resource utilization is below WARN threshold level.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.77 ScpWorkerPodResourceUtilizationAboveCriticalThreshold

Table 6-81 ScpWorkerPodResourceUtilizationAboveCriticalThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | Worker overload control lead to critical level                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Summary            | "Worker overload control lead to critical level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}"                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Severity           | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Condition          | This alert is raised when overload control resource utilization of SCP-Worker reaches CRITICAL level.<br>ocscp_worker_pod_overload_control_resource_utilization_critical > 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.9018                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Metric Used        | ocscp_worker_pod_overload_control_resource_utilization_critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Recommended Action | <p><b>Cause:</b> When overload control resource utilization of SCP-Worker reaches CRITICAL level.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Monitor pending transactions usage while processing traffic. The threshold value of critical overload control resource utilization can be checked from database.</li> <li>Check CRITICAL level logs of SCP-Worker for overload control resource utilization status.</li> </ul> <p><b>Recovery:</b> This alert clears automatically when overload control resource utilization is below CRITICAL threshold level.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.78 SCPDNSSRVNRFMigrationTaskFailure

**Table 6-82 SCPDNSSRVNRFMigrationTaskFailure**

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Condition               | ocscp_configuration_dnssrv_nrf_migration_task_failure == 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Description             | An alert is raised to notify that migration from static to DNS has failed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Recommended Actions     | <p><b>Cause:</b></p> <ul style="list-style-type: none"> <li>If migration to DNS task was waiting for DNS SRV data and wait time elapsed.</li> <li>If any migration task fails due to no acknowledgement from other microservices.</li> <li>Wait time elapsed in task completion response for any migration task.</li> </ul> <p><b>Diagnostic Information:</b></p> <p>Monitor that all the DNS SRV configurations are proper and that all SCP pods are up and running in the proper state.</p> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>DNS SRV data, wait time elapsed: Once data is received from DNS, the alert will be cleared.</li> <li>No acknowledgement: Keep retrying for success acknowledgement and clear or remove the alert on receiving success acknowledgement.</li> <li>Wait time elapsed for completion response: Resend the event and wait. Repeat this until a completion response is received, and on receiving a completion response, clear the alert.</li> </ul> <p>In all the raised conditions, the alert will also be cleared on receiving the new migration task.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.79 SCPDNSSRVNRFNonMigrationTaskFailure

**Table 6-83 SCPDNSSRVNRFNonMigrationTaskFailure**

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Condition               | ocscp_configuration_dnssrv_nrf_non_migration_task_failure == 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15003                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Description             | An alert is raised to notify that the non-migrated task has failed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Recommended Actions     | <p><b>Cause:</b></p> <ul style="list-style-type: none"> <li>If a non-migrated task fails due to no acknowledgement from other microservices.</li> <li>Wait time elapsed in task completion response.</li> </ul> <p><b>Diagnostic Information:</b></p> <p>Monitor that all the DNS SRV configurations are proper and that all SCP pods are up and running in the proper state.</p> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>No acknowledgement: Keep retrying for success acknowledgement and clear or remove the alert on receiving success acknowledgement.</li> <li>Wait time elapsed: When a new task is submitted for the same SPN, this alert is immediately cleared; if subsequent task processing fails, again, the alert will be raised.</li> </ul> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.80 SCPDNSSRVNRFDuplicateTargetDetected

**Table 6-84 SCPDNSSRVNRFDuplicateTargetDetected**

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Condition               | ocscp_configuration_dnssrv_nrf_duplicate_target_detected == 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Description             | An alert is raised to notify that a duplicate target NRF has been detected in the DNS SRV records.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Recommended Actions     | <p><b>Cause:</b> This alert is raised when a duplicate target FQDN is received from the DNS SRV for different NRF SRV FQDN(s). In this case, the target FQDNs received against the first NRF SRV FQDN in the scpc-configuration service from the scpc-alternate-resolution service shall be processed, but the target FQNDs received against the subsequent NRF SRV FQDN will be ignored, and this alert shall be raised.</p> <p><b>Diagnostic Information:</b><br/>Monitor that all the DNS SRV configurations are proper and that all SCP pods are up and running in the proper state.</p> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>If for the same NRF SRV FQDN receives non-overlapping target FQDNs, then the alert will be cleared.</li> </ul> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.81 SCPHighResponseTimeFromProducer

**Table 6-85 SCPHighResponseTimeFromProducer**

| Field                   | Description                                                                                                                                                                                                                                                                                    |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description             | It notifies when the traffic exceeds 200 messages per second and the response delay from the Producer NF takes more than 50 seconds.                                                                                                                                                           |
| Summary                 | More than 200 responses received by the SCP have a response time exceeding 50,000 milliseconds. Instance name: {{\$labels.instance}}, Namespace: {{\$labels.namespace}}, Pod name: {{\$labels.pod}}, Timestamp: {{ with query "time()" }} {{ .   first   value   humanizeTimestamp }}{{ end }} |
| Severity                | Info                                                                                                                                                                                                                                                                                           |
| Condition               | (sum(rate(ocscp_metric_upstream_service_time_total{ocscp_upstream_service_time="50000ms"}[2m])) by (kubernetes_namespace) + sum(rate(ocscp_metric_upstream_service_time_total{ocscp_upstream_service_time=">50000ms"}[2m])) by (kubernetes_namespace)) > 200                                   |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15004                                                                                                                                                                                                                                                               |
| Metric Used             | ocscp_metric_upstream_service_time_total                                                                                                                                                                                                                                                       |

Table 6-85 (Cont.) SCPHighResponseTimeFromProducer

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> More than 200 messages per second have an upstream response time above 50 seconds.</p> <p><b>Diagnostic Information:</b><br/>Monitor metric metricocscp_metric_upstream_service_time_total with ocscp_upstream_service_time="50000ms" and ocscp_upstream_service_time="&gt;50000ms".</p> <p><b>Recovery:</b> The alert is cleared automatically when the number of responses with delays exceeding 50 seconds falls below 200 messages per second. If the alert does not clear, check for any producer NFs or specific service request types that are taking more than 50 seconds to respond and take corrective actions if necessary. Note that immediate action may not be required, as this alert is informational. However, a high number of requests with long response delays could lead to performance degradation at the SCP.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.82 SCPCGroupVersionDetectionFailed

Table 6-86 SCPCGroupVersionDetectionFailed

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Condition               | ocscp_worker_cgroup_version_detection_failed == 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15005                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Description             | Notify that cgroup version detection has failed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Recommended Actions     | <p><b>Cause:</b> SCP is unable to detect the cgroup version from the underlying kernel with the command "stat -fc %T /sys/fs/cgroup/." The possible expected value is either tmpfs or cgroup2fs.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Option 1: Check worker error level logs for failure of cgroup version detection.</li> <li>Option 2: <ul style="list-style-type: none"> <li>Login to the worker pod and run the command "stat -fc %T /sys/fs/cgroup."</li> <li>Verify whether it outputs either tmpfs or cgroup2fs.</li> </ul> </li> </ul> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>Make sure the cgroup has either tmpfs or cgroup2fs.</li> <li>Do same version upgrade on SCP.</li> </ul> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.83 SCPCPUUsageFileReadFailed

Table 6-87 SCPCPUUsageFileReadFailed

| Field                   | Description                                  |
|-------------------------|----------------------------------------------|
| Severity                | critical                                     |
| Condition               | ocscp_worker_cpu_usage_file_read_failed == 1 |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15006             |

Table 6-87 (Cont.) SCPCPUUsageFileReadFailed

| Field                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>         | Notify that the CPU usage file read operation failed within the detected cgroup version.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Recommended Actions</b> | <p><b>Cause:</b> SCP encountered a failure in performing a read operation for the CPU usage file within the detected cgroup version. The file path is determined based on the detected cgroup version.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Option 1: Check worker warn level logs for failure in performing a read operation for the CPU usage file.</li> <li>Option 2: <ul style="list-style-type: none"> <li>Log in to the worker pod and run the command "stat -fc %T /sys/fs/cgroup" to confirm whether it outputs either 'tmpfs' or 'cgroup2fs'.</li> <li>Depending on the detected cgroup version, inspect the file located at /sys/fs/cgroup/cpu/cpuacct.usage for 'tmpfs' or /sys/fs/cgroup/cpu.stat for 'cgroup2fs'.</li> <li>Ensure that the file exists at the specified path and possesses the required permissions for read operations.</li> </ul> </li> </ul> <p><b>Recovery:</b></p> <ul style="list-style-type: none"> <li>Verify that the files are appropriate according to the cgroup version and possess the necessary permissions for read operations.</li> <li>Perform the same version upgrade on the SCP.</li> </ul> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.84 SCPIgnoreUnknownService

Table 6-88 SCPIgnoreUnknownService

| Field                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Severity</b>                | Info                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Condition</b>               | increase(ocscp_ignore_unknown_service_total[24h]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>OID used for SNMP Traps</b> | 1.3.6.1.4.1.323.5.3.35.1.2.15000                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Description</b>             | An alert is raised to notify that SCP ignored an unknown service in the NF profile.                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Recommended Actions</b>     | <p><b>Cause:</b> SCP has received the NF profile with an unknown service and processed the profile by ignoring this unknown service.</p> <p><b>Diagnostic Information:</b></p> <p>Check the received NF profile for the unknown services.</p> <p><b>Recovery:</b> If the unknown services are not present in the NF profile in the next scrapping interval, then the alert will be cleared.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.85 SCPWorkerSSLCertificateOnCriticalExpiry

Table 6-89 SCPWorkerSSLCertificateOnCriticalExpiry

| Field            | Description                                    |
|------------------|------------------------------------------------|
| <b>Severity</b>  | Critical                                       |
| <b>Condition</b> | ocscp_metric_ssl_certificate_expire_total == 1 |

Table 6-89 (Cont.) SCPWorkerSSLCertificateOnCriticalExpiry

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OID used for SNMP Traps | 11.3.6.1.4.1.323.5.3.35.1.2.15010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description             | An alert is raised whenever the SCP SSL certificate is about to expire, based on the configured threshold values.                                                                                                                                                                                                                                                                                                                                                                                                       |
| Recommended Actions     | <p><b>Cause:</b> The SSL certificate expiration is approaching the configured critical expiry time.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Whenever this alert is raised, it indicates that the SSL certificates configured for SCP are about to expire.</li> <li>Verify the certificate expiry date.</li> </ul> <p><b>Recovery:</b> The SCP SSL secret needs to be updated with renewed SSL certificates. For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.86 SCPWorkerSSLCertificateOnMajorExpiry

Table 6-90 SCPWorkerSSLCertificateOnMajorExpiry

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Condition               | ocscp_metric_ssl_certificate_expire_total == 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15011                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Description             | An alert is raised whenever the SCP SSL certificate is about to expire, based on the configured threshold values.                                                                                                                                                                                                                                                                                                                                                                                                    |
| Recommended Actions     | <p><b>Cause:</b> The SSL certificate expiration is approaching the configured major expiry time.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Whenever this alert is raised, it indicates that the SSL certificates configured for SCP are about to expire.</li> <li>Verify the certificate expiry date.</li> </ul> <p><b>Recovery:</b> The SCP SSL secret needs to be updated with renewed SSL certificates. For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.87 SCPWorkerSSLCertificateOnMinorExpiry

Table 6-91 SCPWorkerSSLCertificateOnMinorExpiry

| Field                   | Description                                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------------------------------------|
| Severity                | minor                                                                                                             |
| Condition               | ocscp_metric_ssl_certificate_expire_total == 3                                                                    |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15012                                                                                  |
| Description             | An alert is raised whenever the SCP SSL certificate is about to expire, based on the configured threshold values. |

Table 6-91 (Cont.) SCPWorkerSSLCertificateOnMinorExpiry

| Field               | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Actions | <p><b>Cause:</b> The SSL certificate expiration is approaching the configured minor expiry time.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Whenever this alert is raised, it indicates that the SSL certificates configured for SCP are about to expire.</li> <li>Verify the certificate expiry date.</li> </ul> <p><b>Recovery:</b> The SCP SSL secret needs to be updated with renewed SSL certificates. For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.88 SCPIngressConnectionEstablishmentFailure

Table 6-92 SCPIngressConnectionEstablishmentFailure

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | info                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Condition               | increase(ocscp_worker_https_ingress_connection_failure_total[2m]) > 0                                                                                                                                                                                                                                                                                                                                                                  |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15007                                                                                                                                                                                                                                                                                                                                                                                                       |
| Description             | An alert is raised whenever any ingress HTTPS connection is failed.                                                                                                                                                                                                                                                                                                                                                                    |
| Recommended Actions     | <p><b>Cause:</b> Whenever an Ingress HTTPS connection establishment fails.</p> <p><b>Diagnostic Information:</b></p> <p>This alert may be raised if any connection establishment fails or if a handshake fails.</p> <p><b>Recovery:</b> The alert will be cleared if there are no ingress HTTPS connection failures in the next scrape interval (2 minutes).</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.89 SCPEgressConnectionEstablishmentFailure

Table 6-93 SCPEgressConnectionEstablishmentFailure

| Field                   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Severity                | info                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Condition               | increase(ocscp_worker_https_egress_connection_failure_total[2m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                      |
| OID used for SNMP Traps | 1.3.6.1.4.1.323.5.3.35.1.2.15008                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Description             | An alert is raised whenever any egress HTTPS connection is failed.                                                                                                                                                                                                                                                                                                                                                                                                        |
| Recommended Actions     | <p><b>Cause:</b> Whenever an egress HTTPS connection establishment fails to send the request to producer NFs.</p> <p><b>Diagnostic Information:</b></p> <p>This alert may be raised if any connection establishment fails or if a handshake fails.</p> <p><b>Recovery:</b> The alert will be cleared if there are no engress HTTPS connection failures in the next scrape interval (2 minutes).</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |



## 6.3.90 SCPNrfProxyOauthQueuesUtilizationAboveMinorThreshold

**Table 6-94 SCPNrfProxyOauthQueuesUtilizationAboveMinorThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | description: 'instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}: SCP NrfProxyOauth Queues Utilization Above Minor Threshold'                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Summary</b>            | 'SCP NrfProxy Oauth Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                     |
| <b>Severity</b>           | Minor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Condition</b>          | This alert is raised when SCP NrfProxy Oauth Queues Utilization is above the minor threshold.<br>ocscp_nrfproxy_oauth_queue_alert{severity="MINOR"} == 1                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.14000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Metric Used</b>        | ocscp_nrfproxy_oauth_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Recommended Action</b> | <p><b>Cause:</b> When NrfProxy Task queues are filled, the traffic exceeds the limit.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Monitor the traffic toward nrfProxy to pod using the Grafana dashboard.</li> <li>Refer to the rate of ocscp_nrfproxy_oauth_queue_alert metric on the Grafana dashboard.</li> </ul> <p><b>Recovery:</b> This alert clears automatically when the traffic decreases below the Major threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.91 SCPNrfProxyOauthQueuesUtilizationAboveMajorThreshold

**Table 6-95 SCPNrfProxyOauthQueuesUtilizationAboveMajorThreshold**

| Field              | Details                                                                                                                                                                                                                                                   |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b> | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}: SCP NrfProxyOauth Queues Utilization Above Major Threshold'                                                                                           |
| <b>Summary</b>     | 'SCP NrfProxy Oauth Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}' |
| <b>Severity</b>    | Major                                                                                                                                                                                                                                                     |
| <b>Condition</b>   | This alert is raised when SCP NrfProxy Oauth Queues Utilization is above the major threshold.<br>ocscp_nrfproxy_oauth_queue_alert{severity="MAJOR"} == 1                                                                                                  |
| <b>OID</b>         | 1.3.6.1.4.1.323.5.3.35.1.2.14000                                                                                                                                                                                                                          |
| <b>Metric Used</b> | ocscp_nrfproxy_oauth_queue_alert                                                                                                                                                                                                                          |

Table 6-95 (Cont.) SCPNrfProxyOauthQueuesUtilizationAboveMajorThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended Action | <p><b>Cause:</b> When NrfProxy Task queues are filled, the traffic exceeds the limit.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Monitor the traffic toward nrfProxy to pod using the Grafana dashboard.</li> <li>Refer to the rate of ocscp_nrfproxy_oauth_queue_alert metric on the Grafana dashboard.</li> </ul> <p><b>Recovery:</b> This alert clears automatically when the traffic decreases below the Major threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.92 SCPNrfProxyOauthQueuesUtilizationAboveCriticalThreshold

Table 6-96 SCPNrfProxyOauthQueuesUtilizationAboveCriticalThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}: SCP NrfProxy Oauth Queues Utilization Above Critical Threshold'                                                                                                                                                                                                                                                                                                                                                                              |
| Summary            | 'SCP NrfProxy Oauth Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                                                                                                     |
| Severity           | Critical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Condition          | This alert is raised when SCP NrfProxy Oauth Queues Utilization is above the critical threshold.<br>ocscp_nrfproxy_oauth_queue_alert{severity="CRITICAL"} == 1                                                                                                                                                                                                                                                                                                                                                                                   |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.14000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Metric Used        | ocscp_nrfproxy_oauth_queue_alert                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Recommended Action | <p><b>Cause:</b> When NrfProxy Task queues are filled, the traffic exceeds the limit.</p> <p><b>Diagnostic Information:</b></p> <ul style="list-style-type: none"> <li>Monitor the traffic toward nrfProxy to pod using the Grafana dashboard.</li> <li>Refer to the rate of ocscp_nrfproxy_oauth_queue_alert metric on the Grafana dashboard.</li> </ul> <p><b>Recovery:</b> This alert clears automatically when the traffic decreases below the critical threshold.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.93 ScpSelfOCIThresholdAboveWarn

Table 6-97 ScpSelfOCIThresholdAboveWarn

| Field       | Details                                                                                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | An alert is raised whenever the configured self-OCI for SCP reaches a warn level.                                                                                                                                   |
| Summary     | SCP load level lead to Warn level. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }} |
| Severity    | warning                                                                                                                                                                                                             |

Table 6-97 (Cont.) ScpSelfOCIThresholdAboveWarn

| Field              | Details                                                                                                                                                                                                                                                                                                                                                  |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Condition          | increase(ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_t<br>hreshold_level="WARN"}[2m]) > 0                                                                                                                                                                                                                                       |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.15013                                                                                                                                                                                                                                                                                                                         |
| Metric Used        | ocscp_worker_self_oci_above_oci_conveyance_threshold_total                                                                                                                                                                                                                                                                                               |
| Recommended Action | <b>Cause:</b> Whenever the configured self-OCI for SCP reaches a warn level.<br><b>Diagnostic Information:</b><br>SCP may be experiencing high load.<br><b>Recovery:</b> The alert will clear automatically when the load on SCP decreases and falls below the configured warn level.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.94 ScpSelfOCIThresholdAboveMinor

Table 6-98 ScpSelfOCIThresholdAboveMinor

| Field              | Details                                                                                                                                                                                                                                                                                                                                                    |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | An alert is raised whenever the configured self-OCI for SCP reaches a minor level.                                                                                                                                                                                                                                                                         |
| Summary            | SCP load level lead to Minor level. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}                                                                                                                                      |
| Severity           | minor                                                                                                                                                                                                                                                                                                                                                      |
| Condition          | increase(ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_t<br>hreshold_level="MINOR"}[2m]) > 0                                                                                                                                                                                                                                        |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.15014                                                                                                                                                                                                                                                                                                                           |
| Metric Used        | ocscp_worker_self_oci_above_oci_conveyance_threshold_total                                                                                                                                                                                                                                                                                                 |
| Recommended Action | <b>Cause:</b> Whenever the configured self-OCI for SCP reaches a minor level.<br><b>Diagnostic Information:</b><br>SCP may be experiencing high load.<br><b>Recovery:</b> The alert will clear automatically when the load on SCP decreases and falls below the configured minor level.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.95 ScpSelfOCIThresholdAboveMajor

Table 6-99 ScpSelfOCIThresholdAboveMajor

| Field       | Details                                                                                                                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | An alert is raised whenever the configured self-OCI for SCP reaches a major level.                                                                                                                                    |
| Summary     | SCP load level lead to Major level. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }} |
| Severity    | major                                                                                                                                                                                                                 |
| Condition   | increase(ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_t<br>hreshold_level="MAJOR"}[2m]) > 0                                                                                                   |

Table 6-99 (Cont.) ScpSelfOCIThresholdAboveMajor

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.15015                                                                                                                                                                                                                                                                                                                                              |
| Metric Used        | ocscp_worker_self_oci_above_oci_conveyance_threshold_total                                                                                                                                                                                                                                                                                                                    |
| Recommended Action | <p><b>Cause:</b> Whenever the configured self-OCI for SCP reaches a major level.</p> <p><b>Diagnostic Information:</b><br/>SCP may be experiencing high load.</p> <p><b>Recovery:</b> The alert will clear automatically when the load on SCP decreases and falls below the configured major level.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.96 ScpSelfOCIThresholdAboveCritical

Table 6-100 ScpSelfOCIThresholdAboveCritical

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | This alert will be activated whenever the configured self-OCI for SCP reaches a critical level.                                                                                                                                                                                                                                                                                     |
| Summary            | SCP load level lead to Critical level. namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }} {{ .   first   value   humanizeTimestamp }} {{ end }}                                                                                                                                                      |
| Severity           | critical                                                                                                                                                                                                                                                                                                                                                                            |
| Condition          | increase(ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_threshold_level="CRITICAL"}[2m]) > 0                                                                                                                                                                                                                                                                  |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.15016                                                                                                                                                                                                                                                                                                                                                    |
| Metric Used        | ocscp_worker_self_oci_above_oci_conveyance_threshold_total                                                                                                                                                                                                                                                                                                                          |
| Recommended Action | <p><b>Cause:</b> Whenever the configured self-OCI for SCP reaches a critical level.</p> <p><b>Diagnostic Information:</b><br/>SCP may be experiencing high load.</p> <p><b>Recovery:</b> The alert will clear automatically when the load on SCP decreases and falls below the configured critical level.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.97 SCPWorkerSSLPartialSecret

Table 6-101 SCPWorkerSSLPartialSecret

| Field       | Details                                                                                                                                                                                                                                                                                                                        |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | SCP Worker SSL Secret is Invalid or Partial'                                                                                                                                                                                                                                                                                   |
| Summary     | SCP Worker SSL Secret is Invalid or Partial, ocscp_worker_fqdn: {{ \$labels.ocscp_producer_host }}, scpfdn: {{ \$labels.ocscp_fqdn }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }} {{ .   first   value   humanizeTimestamp }} {{ end }} |
| Severity    | Major                                                                                                                                                                                                                                                                                                                          |

Table 6-101 (Cont.) SCPWorkerSSLPartialSecret

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                 |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Condition          | This alert is raised when any SCP-Worker secret is patched with partial data.<br>ocscp_worker_ssl_partial_secret == 1                                                                                                                                                                                                                                                                   |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.15017                                                                                                                                                                                                                                                                                                                                                        |
| Metric Used        | ocscp_worker_ssl_partial_secret                                                                                                                                                                                                                                                                                                                                                         |
| Recommended Action | <p><b>Cause:</b> Whenever any SCP-Worker secret is patched with the partial data.</p> <p><b>Diagnostic Information:</b> Verify the patched secret whether it contains all the required data.</p> <p><b>Recovery:</b> Alert is cleared automatically when valid secret is patched which contains all the data.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.98 SCPWorkerAndNFTimeSyncFailure

Table 6-102 SCPWorkerAndNFTimeSyncFailure

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'Consumer NF and SCP are not time synchronized'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Summary            | Consumer NF and SCP are not time synchronized: consumernftype = {{ \$labels.ocscp_consumer_nf_type }}, consumernfinstanceid = {{ \$labels.ocscp_consumer_nf_instance_id }}, namespace: {{ \$labels.namespace }}, podname: {{ \$labels.pod }}, scpfdn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{ .   first   value   humanizeTimestamp }}{{ end }}                                                                                                                                                                             |
| Severity           | Major                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Condition          | <p>This alert is raised when there is a time synchronization difference between SCP-Worker and the consumer NF received request with the timestamp_headers_support feature is enabled.</p> <p>increase(ocscp_worker_timestamp_headers_validation_fail_total{ocscp_validation_failure="TIME_SYNC_FAILURE"}[2m]) &gt; 0</p>                                                                                                                                                                                                                            |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.15019                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Metric Used        | ocscp_worker_timestamp_headers_validation_fail_total                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Recommended Action | <p><b>Cause:</b> When there is a time synchronization difference between SCP-Worker and the consumer NF received request with the timestamp_headers_support feature is enabled.</p> <p><b>Diagnostic Information:</b> SCP may have received a request from the consumer NF which is not in time sync when the timestamp_headers_support is enabled.</p> <p><b>Recovery:</b> Alert is cleared automatically when no such read failure occurs over the next scrape interval.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

## 6.3.99 SCPCoherenceCacheHitsRateAboveThreshold

Table 6-103 SCPCoherenceCacheHitsRateAboveThreshold

| Field       | Details                                                         |
|-------------|-----------------------------------------------------------------|
| Description | 'SCP Coherence Cache Hits Rate above threshold (i.e. 2200 mps)' |

Table 6-103 (Cont.) SCPCoherenceCacheHitsRateAboveThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Summary            | 'namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value   printf "%.2f" }} mps which is above 2200'                                                                                                                       |
| Severity           | Critical                                                                                                                                                                                                                                                                                                                                                                                 |
| Condition          | This alert is raised when SCP Coherence cache rate exceeds the threshold (2200 MPS).<br>sum(rate(coherence_cache_hits{app_kubernetes_io_name="scp-cache"}[2m])) by (kubernetes_namespace) > 2200                                                                                                                                                                                         |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.7034                                                                                                                                                                                                                                                                                                                                                          |
| Metric Used        | coherence_cache_hits                                                                                                                                                                                                                                                                                                                                                                     |
| Recommended Action | <b>Cause:</b> When SCP Coherence cache rate exceeds the threshold (2200 MPS).<br><b>Diagnostic Information:</b> SCP Coherence cache rate exceeds the threshold (2200 MPS).<br><b>Recovery:</b> Alert is cleared automatically when SCP Coherence cache rate goes below the threshold during the next scrape interval.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.100 SCPNotificationRequestsRateAboveThreshold

Table 6-104 SCPNotificationRequestsRateAboveThreshold

| Field              | Details                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description        | 'SCP Notification Requests are above threshold (i.e. 40 mps)'                                                                                                                                                                                                                                                                                                                                                      |
| Summary            | 'namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value   printf "%.2f" }} mps which is above 40'                                                                                                                                                   |
| Severity           | Critical                                                                                                                                                                                                                                                                                                                                                                                                           |
| Condition          | This alert is raised when the number of SCP notification requests exceeds the threshold (40 MPS).<br>sum(rate(ocscp_notification_request_total{app_kubernetes_io_name="scpc-notification"}[2m])) by (kubernetes_namespace) > 40                                                                                                                                                                                    |
| OID                | 1.3.6.1.4.1.323.5.3.35.1.2.3012                                                                                                                                                                                                                                                                                                                                                                                    |
| Metric Used        | ocscp_notification_request_total                                                                                                                                                                                                                                                                                                                                                                                   |
| Recommended Action | <b>Cause:</b> When the number of SCP notification requests exceeds the threshold (40 MPS).<br><b>Diagnostic Information:</b> SCP notification requests exceed the threshold (40 MPS).<br><b>Recovery:</b> Alert is cleared automatically when the number of SCP notification requests goes below the threshold during the next scrape interval.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.101 SCPLciRxRateAboveThreshold

**Table 6-105 SCPLciRxRateAboveThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | description: 'LCI Rx Rate is above threshold (i.e. 150)'                                                                                                                                                                                                                                                                                                |
| <b>Summary</b>            | 'namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value   printf "%.2f" }} mps which is above 150'                                                                                       |
| <b>Severity</b>           | Critical                                                                                                                                                                                                                                                                                                                                                |
| <b>Condition</b>          | This alert is raised when LCI Rx rate exceeds the threshold, that is, 150.<br>sum(rate(ocscp_metric_nf_lci_rx_total{app_kubernetes_io_name="scp-worker"}[2m])) by (kubernetes_namespace) > 150                                                                                                                                                          |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.7032                                                                                                                                                                                                                                                                                                                         |
| <b>Metric Used</b>        | ocscp_metric_nf_lci_rx_total                                                                                                                                                                                                                                                                                                                            |
| <b>Recommended Action</b> | <b>Cause:</b> When LCI Rx rate exceeds the threshold, that is, 150.<br><b>Diagnostic Information:</b> LCI Rx rate exceeds the threshold, that is, 150.<br><b>Recovery:</b> Alert is cleared automatically when LCI Rx rate goes below the threshold during the next scrape interval.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.102 SCPOciRxRateAboveThreshold

**Table 6-106 SCPOciRxRateAboveThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                             |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | 'OCI Rx Rate is above threshold (i.e. 5)'                                                                                                                                                                                                                                                                                                           |
| <b>Summary</b>            | 'namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value   printf "%.2f" }} mps which is above 5'                                                                                     |
| <b>Severity</b>           | Critical                                                                                                                                                                                                                                                                                                                                            |
| <b>Condition</b>          | This alert is raised when OCI Rx rate exceeds the threshold, that is, 5.<br>sum(rate(ocscp_metric_nf_oci_rx_total{app_kubernetes_io_name="scp-worker"}[2m])) by (kubernetes_namespace) > 5                                                                                                                                                          |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.7033                                                                                                                                                                                                                                                                                                                     |
| <b>Metric Used</b>        | ocscp_metric_nf_oci_rx_total                                                                                                                                                                                                                                                                                                                        |
| <b>Recommended Action</b> | <b>Cause:</b> When OCI Rx rate exceeds the threshold, that is, 5.<br><b>Diagnostic Information:</b> OCI Rx rate exceeds the threshold, that is, 5.<br><b>Recovery:</b> Alert is cleared automatically when OCI Rx rate goes below the threshold during the next scrape interval.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.103 SCPTrafficRateAboveRatedThreshold

**Table 6-107 SCPTrafficRateAboveRatedThreshold**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | 'Traffic Rate at SCP is above threshold (i.e. 730000 mps)'                                                                                                                                                                                                                                                                                                                                         |
| <b>Summary</b>            | 'namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value   printf "%.2f" }} mps which is above 730000'                                                                                                                           |
| <b>Severity</b>           | Critical                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Condition</b>          | This alert is raised when the traffic rate at SCP exceeds the threshold, that is, 730000 MPS.<br>(sum(rate(ocscp_metric_http_rx_req_total{app_kubernetes_io_name="scp-worker", ocscp_consumer_host!="OCSCP-INITIATED-MSG"}[2m])) by (kubernetes_namespace) + sum(rate(ocscp_metric_http_tx_req_total{app_kubernetes_io_name="scp-worker"}[2m])) by (kubernetes_namespace)) > 730000                |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.7031                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Metric Used</b>        | ocscp_metric_http_rx_req_total                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Recommended Action</b> | <b>Cause:</b> When the traffic rate at SCP exceeds the threshold, that is, 730000 MPS.<br><b>Diagnostic Information:</b> The traffic rate at SCP exceeds the threshold, that is, 730000 MPS.<br><b>Recovery:</b> Alert is cleared automatically when the traffic rate goes below the threshold during the next scrape interval.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |

## 6.3.104 SCPMaxNFProfilesLimitExceeded

**Table 6-108 SCPMaxNFProfilesLimitExceeded**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | 'NFs registered are more than the rated capacity (1200 NFs)'                                                                                                                                                                                                                                                                                                                                                        |
| <b>Summary</b>            | 'NFs registered are more than the rated capacity (1200 NFs) for namespace: {{ \$labels.kubernetes_namespace }}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}'                                                                                                                                                                                                           |
| <b>Severity</b>           | Major                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Condition</b>          | This alert is raised when the number of registered NFs exceeds the rated capacity (1200 NFs).<br>sum(ocscp_notification_nf_profiles_count) by (kubernetes_namespace) > 1200                                                                                                                                                                                                                                         |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.35.1.2.3013                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Metric Used</b>        | ocscp_notification_nf_profiles_count                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Recommended Action</b> | <b>Cause:</b> When registered NFs are more than the rated capacity (1200 NFs).<br><b>Diagnostic Information:</b> NFs registered are more than the rated capacity (1200 NFs).<br><b>Recovery:</b> The alert is cleared automatically when the number of registered NFs falls below the rated capacity (1200 NFs) during the next scrape interval.<br>For any assistance, contact <a href="#">My Oracle Support</a> . |



## 6.4 Mediation Alerts

This section provides detailed information on all mediation alerts, including their descriptions, severity, and recommended actions.

### 6.4.1 NFMediationUserDefinedVariablesMaxSizeLimitExceeded

**Table 6-109 NFMediationUserDefinedVariablesMaxSizeLimitExceeded**

| Field                     | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Description</b>        | This alert is raised when the total size of all user-defined variables and their values exceeds the configured size.                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Summary</b>            | namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ .   first   value   humanizeTimestamp }}{{ end }}: Currently user defined variables maximum size limit exceeded the configured limit {{ \$value   printf "%.2f" }} times                                                                                                                                                                                                                           |
| <b>Severity</b>           | minor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Condition</b>          | increase(ocscp_med_udvs_max_size_limit_exceeded_total[5m]) > 0                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>OID</b>                | 1.3.6.1.4.1.323.5.3.47.1.2.1005                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Metric Used</b>        | ocscp_med_udvs_max_size_limit_exceeded_total                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Recommended Action</b> | <p><b>Cause:</b> This alert is raised when the total size of all user-defined variables and their values exceeds the configured limit.</p> <p><b>Diagnostic Information:</b> The size of the user-defined variables list (med-user-defined-var-list) during mediation may have exceeded the configured limit.</p> <p><b>Recovery:</b> Reduce the size or number of user-defined variables to bring the size within the limit.</p> <p>For any assistance, contact <a href="#">My Oracle Support</a>.</p> |

# 7

## KPIs and Traces

This chapter provides information about newly introduced and updated Key Performance Indicators (KPIs) and Traces.

### 7.1 Key Performance Indicators

This section provides information about Key Performance Indicators (KPIs) for Service Communication Proxy (SCP).

In the Grafana SCP dashboard, you can select a namespace from the dropdown menu.

If the dropdown menu does not populate with options, perform the following steps:

1. Navigate to **Settings** and then to **Variables** and **Data Source**.
2. Ensure the correct Data Source is selected.
3. Verify that namespaces are being populated correctly by running the query.

#### 7.1.1 Platform KPIs

The following table provides information on Platform metrics.

**Table 7-1 SCP CPU Usage**

| Field       | Details                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------|
| Description | The total SCP CPU utilization per pod.                                                                        |
| Expression  | <code>sum(rate(container_cpu_usage_seconds_total{image!="",namespace="ocscp"}[2m])) by (pod,container)</code> |

**Table 7-2 SCP Memory Usage**

| Field       | Details                                                                                                                |
|-------------|------------------------------------------------------------------------------------------------------------------------|
| Description | The total SCP memory utilization per pod.                                                                              |
| Expression  | <code>(avg_over_time(container_memory_working_set_bytes{namespace="ocscp",container=~"istio-proxy scp.*"}[2m]))</code> |

**Table 7-3 SCP Memory Usage Percentage**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total percentage of SCP memory utilization per pod.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Expression  | <code>round( 100 * avg_over_time(container_memory_working_set_bytes{image!="",container_name!="POD",namespace="ocscp", container=~"scp-nrfproxy"}[2m]) / (8*1073741824) )</code><br><b>Note:</b> Here, scp-nrfproxy is taken as an example; the same holds true for all the other microservices. The hardcoded memory value of 8GB (for nrfproxy) must be replaced in the Grafana dashboard file with the value that is assigned in the deployment environment, and this holds true for all the other microservices. |

**Table 7-4 SCP CPU Usage Percentage**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total percentage of SCP CPU utilization per pod.                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Expression  | <code>sum(rate(container_cpu_usage_seconds_total{image!="",namespace="ocscp",container="scpc-audit"}[2m])) by (pod,container)*100/3</code><br><b>Note:</b> Here, scp-worker is taken as an example; the same holds true for all the other microservices. The hardcoded CPU value of 8 (for scp-worker) must be replaced in the Grafana dashboard file with the value that is assigned in the deployment environment, and this holds true for all the other microservices. |

**Table 7-5 CPU Usage**

| Field       | Details                                                                                                              |
|-------------|----------------------------------------------------------------------------------------------------------------------|
| Description | The total percentage of SCP CPU utilization by primary and worker pod.                                               |
| Expression  | <code>sum (rate (container_cpu_usage_seconds_total{image!="",node=~"k8s.*",namespace="ocscp"}[2m])) by (node)</code> |

**Table 7-6 Memory Usage**

| Field       | Details                                                                                                 |
|-------------|---------------------------------------------------------------------------------------------------------|
| Description | The total percentage of SCP memory utilization by primary and worker pod.                               |
| Expression  | <code>sum (container_memory_working_set_bytes{id="/",node=~"k8s.*",namespace="ocscp"}) by (node)</code> |

**Table 7-7 Prometheus CPU Utilization**

| Field       | Details                                                                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | CPU utilization of Prometheus pods.                                                                                                                           |
| Expression  | <code>sum(rate(container_cpu_usage_seconds_total{pod="ocne-prometheus-server-5f48d747b8-lx4zn",container="prometheus-server",namespace="ocscp"} [5m]))</code> |

**Table 7-8 Prometheus Memory Utilization**

| Field       | Details                                                                                    |
|-------------|--------------------------------------------------------------------------------------------|
| Description | Memory Utilization of Prometheus Pods.                                                     |
| Expression  | <code>container_memory_usage_bytes{container="prometheus-server",namespace="ocscp"}</code> |

**Table 7-9 Samples\_scraped\_time**

| Field       | Details                                                                    |
|-------------|----------------------------------------------------------------------------|
| Description | Total number of Metrics samples scraped by Prometheus in give time.        |
| Expression  | <code>avg_over_time(scrape_samples_scraped{namespace="ocscp"}[10m])</code> |

## 7.1.2 Application KPIs

The following table provides information on Application KPIs.

**Table 7-10 Ingress Request Rate**

| Field       | Details                                                                                                                                                    |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Total number of ingress requests sent to SCP by consumer NFs.                                                                                              |
| Expression  | sum(irate(ocscp_metric_http_rx_req_total{namespace="ocscp", ocscp_consumer_host!="OCSCP-INITIATED-MSG"}[5m])) by (ocscp_nf_type,ocscp_service_instance_id) |

**Table 7-11 Egress Request Rate**

| Field       | Details                                                                              |
|-------------|--------------------------------------------------------------------------------------|
| Description | Total number of egress requests sent to producer NFs by SCP.                         |
| Expression  | sum(irate(ocscp_metric_http_tx_req_total{namespace="ocscp"}[2m])) by (ocscp_nf_type) |

**Table 7-12 Ingress Response Rate**

| Field       | Details                                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------------------------------|
| Description | Total number of ingress responses sent to SCP by producer NFs.                                                        |
| Expression  | sum(irate(ocscp_metric_http_rx_res_total{namespace="ocscp"}[2m])) by (ocscp_response_code_class, ocscp_producer_host) |

**Table 7-13 Egress Response Rate**

| Field       | Details                                                                                                       |
|-------------|---------------------------------------------------------------------------------------------------------------|
| Description | Total number of egress responses sent to consumer NFs by SCP.                                                 |
| Expression  | sum(irate(ocscp_metric_http_tx_res_total{namespace="ocscp", ocscp_consumer_host!="OCSCP-INITIATED-MSG"}[2m])) |

**Table 7-14 Response Processing Time**

| Field       | Details                                                                                                 |
|-------------|---------------------------------------------------------------------------------------------------------|
| Description | The rate of processing time by SCP for ingress responses into the time buckets.                         |
| Expression  | sum(irate(ocscp_metric_response_processing_time_total{namespace="ocscp"}[2m]))by(ocscp_processing_time) |

**Table 7-15 Request Processing Time**

| Field       | Details                                                                                                |
|-------------|--------------------------------------------------------------------------------------------------------|
| Description | The rate of processing time by SCP for ingress requests into the time buckets.                         |
| Expression  | sum(irate(ocscp_metric_request_processing_time_total{namespace="ocscp"}[2m]))by(ocscp_processing_time) |

**Table 7-16 Transaction Success Rate**

| Field       | Details                                                                                                                                                                                                                                                                                                                                                  |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The rate of successful transaction response sent by SCP for a request.                                                                                                                                                                                                                                                                                   |
| Expression  | $\frac{((\text{sum}(\text{irate}(\text{ocscp\_metric\_http\_tx\_res\_total}\{\text{ocscp\_response\_code\_class}=\text{"2"}, \text{kubernetes\_namespace}=\sim\text{"$namespace"}\}\{2\text{m}\})))}{(\text{sum}(\text{irate}(\text{ocscp\_metric\_http\_tx\_res\_total}\{\text{kubernetes\_namespace}=\sim\text{"$namespace"}\}\{2\text{m}\})))} * 100$ |

**Table 7-17 Response Code Rate**

| Field       | Details                                                                                                                                                                                   |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The rate of different response codes class on SCP.                                                                                                                                        |
| Expression  | $\text{sum}(\text{irate}(\text{ocscp\_metric\_http\_rx\_res\_total}\{\text{kubernetes\_namespace}=\text{"$namespace"}\}\{2\text{m}\})) \text{ by } (\text{ocscp\_response\_code\_class})$ |

**Table 7-18 scp-worker replicas**

| Field       | Details                                                                                                                                   |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Description | The total number of ready replicas for the scp-worker service.                                                                            |
| Expression  | $\text{kube\_replicaset\_status\_ready\_replicas}\{\text{replicaset}=\sim\text{"*.scp-worker.*"}, \text{namespace}=\text{"$namespace"}\}$ |

**Table 7-19 NF Notifications Success**

| Field       | Details                                                                           |
|-------------|-----------------------------------------------------------------------------------|
| Description | The total number of notifications successfully processed by SCP.                  |
| Expression  | $\text{sum}(\text{ocscp\_notification\_nf\_profile\_processing\_success\_total})$ |

**Table 7-20 NF Notifications Failures**

| Field       | Details                                                                           |
|-------------|-----------------------------------------------------------------------------------|
| Description | The total number of notifications failed to be processed by SCP.                  |
| Expression  | $\text{sum}(\text{ocscp\_notification\_nf\_profile\_processing\_failure\_total})$ |

**Table 7-21 Audit Requests Total**

| Field       | Details                                                                              |
|-------------|--------------------------------------------------------------------------------------|
| Description | The total number of audit requests sent by SCP.                                      |
| Expression  | $\text{sum}(\text{ocscp\_audit\_tx\_req\_total}\{\text{namespace}=\text{"ocscp"}\})$ |

**Table 7-22 Audit Responses Total**

| Field       | Details                                                                              |
|-------------|--------------------------------------------------------------------------------------|
| Description | The total number of audit responses received by SCP.                                 |
| Expression  | $\text{sum}(\text{ocscp\_audit\_rx\_res\_total}\{\text{namespace}=\text{"ocscp"}\})$ |

**Table 7-23 NF Subscription Success**

| Field       | Details                                                          |
|-------------|------------------------------------------------------------------|
| Description | The total number of successful subscriptions on SCP per NF type. |
| Expression  | sum(ocscp_subscription_nf_success_total)                         |

**Table 7-24 NF Subscription Failures**

| Field       | Details                                                      |
|-------------|--------------------------------------------------------------|
| Description | The total number of failed subscriptions on SCP per NF type. |
| Expression  | sum(ocscp_subscription_nf_failure_total)                     |

**Table 7-25 NRF Registration Success**

| Field       | Details                                                  |
|-------------|----------------------------------------------------------|
| Description | The total number of successful NRF registrations on SCP. |
| Expression  | sum(ocscp_subscription_nrf_registration_success_total)   |

**Table 7-26 NRF Registration Failure**

| Field       | Details                                                |
|-------------|--------------------------------------------------------|
| Description | The total number of failed NRF registrations on SCP.   |
| Expression  | sum(ocscp_subscription_nrf_registration_failure_total) |

**Table 7-27 NRF Heartbeat Success**

| Field       | Details                                                                |
|-------------|------------------------------------------------------------------------|
| Description | The total number of successful NRF Heartbeats on SCP.                  |
| Expression  | sum(ocscp_subscription_nrf_heartbeat_success_total{namespace="ocscp"}) |

**Table 7-28 NRF Heartbeat Failures**

| Field       | Details                                                                 |
|-------------|-------------------------------------------------------------------------|
| Description | The total number of failed NRF Heartbeats on SCP.                       |
| Expression  | sum(ocscp_subscription_nrf_heartbeat_failures_total{namespace="ocscp"}) |

## 7.1.3 Feature KPIs

The following table provides information on Feature KPIs.

**Table 7-29 Access Token Count in Response**

| Field       | Details                                                          |
|-------------|------------------------------------------------------------------|
| Description | The rate of responses contains the 3gpp-Sbi-Access-Token header. |

**Table 7-29 (Cont.) Access Token Count in Response**

| Field      | Details                                                                                |
|------------|----------------------------------------------------------------------------------------|
| Expression | sum(irate(ocscp_worker_access_token_forwarded_in_tx_res_total{namespace="ocscp"}[2m])) |

**Table 7-30 Received Response count for nnrf-oauth2 service**

| Field       | Details                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Description | Rate of nnrf-oaut2 service responses from NRF.                                                                                         |
| Expression  | sum(irate(ocscp_metric_http_rx_res_total{namespace="ocscp",ocscp_nf_service_type="nnrf-oauth2",ocscp_response_code="200"}[2m]))by(pod) |

**Table 7-31 Coherence Cache Size for AccessToken**

| Field       | Details                                                       |
|-------------|---------------------------------------------------------------|
| Description | Number of access tokens in the cache.                         |
| Expression  | coherence_cache_size{namespace="ocscp",name="accessTokenMap"} |

**Table 7-32 Access Token Count in Transmitted Request**

| Field       | Details                                                                                |
|-------------|----------------------------------------------------------------------------------------|
| Description | Rate of SCP sending the 3gpp-Sbi-Access-Token header in the request.                   |
| Expression  | sum(irate(ocscp_worker_access_token_forwarded_in_tx_req_total{namespace="ocscp"}[2m])) |

**Table 7-33 SCP Worker - Discovery Tx Requests Rate to NRF Proxy**

| Field       | Details                                                                         |
|-------------|---------------------------------------------------------------------------------|
| Description | Rate of worker sends an on-demand discovery request to nrfproxy.                |
| Expression  | sum(irate(ocscp_metric_ondemand_discovery_tx_req_total{namespace="ocscp"}[2m])) |

**Table 7-34 SCP Worker - Discovery Rx Response Rate from NRF Proxy**

| Field       | Details                                                                         |
|-------------|---------------------------------------------------------------------------------|
| Description | Rate of worker receives on-demand discovery response from nrfproxy.             |
| Expression  | sum(irate(ocscp_metric_ondemand_discovery_rx_res_total{namespace="ocscp"}[2m])) |

**Table 7-35 NRF Proxy - Discovery Tx Requests Rate to NRF**

| Field       | Details                                                                       |
|-------------|-------------------------------------------------------------------------------|
| Description | Rate of discovery requests sent to the NRF by nrfproxy.                       |
| Expression  | sum(irate(ocscp_nrf_nf_discovery_tx_req_total{namespace="ocscp"}[2m]))by(pod) |

**Table 7-36 NRF Proxy - Discovery Rx Response Rate from NRF**

| Field       | Details                                                                       |
|-------------|-------------------------------------------------------------------------------|
| Description | Rate of discovery responses received on nrfproxy from NRF.                    |
| Expression  | sum(irate(ocscp_nrf_nf_discovery_rx_res_total{namespace="ocscp"}[2m]))by(pod) |

**Table 7-37 SCP-Worker - Local Discovery Requests Resolution Rate(Cache Hits)**

| Field       | Details                                                                                     |
|-------------|---------------------------------------------------------------------------------------------|
| Description | Rate of worker was able to resolve discovery request using local cache.                     |
| Expression  | sum(irate(ocscp_metric_ondemand_discovery_cache_match_total{namespace="ocscp"}[2m]))by(pod) |

**Table 7-38 NRF Proxy Generated Error response Rate**

| Field       | Details                                                                                 |
|-------------|-----------------------------------------------------------------------------------------|
| Description | Rate of error responses generated by nrfproxy (excluding nrf-returned errors).          |
| Expression  | sum(irate(ocscp_nrfproxy_generated_error_response_total{namespace="ocscp"}[2m]))by(pod) |

**Table 7-39 SCP LCI Tx Rate**

| Field       | Details                                                           |
|-------------|-------------------------------------------------------------------|
| Description | Rate of messages forwarded with SCP's LCI header.                 |
| Expression  | sum(irate(ocscp_metric_scp_lci_tx_total{namespace=~"ocscp"}[2m])) |

**Table 7-40 Per NF Load**

| Field       | Details                           |
|-------------|-----------------------------------|
| Description | The current load of peer NF.      |
| Expression  | ocscp_nf_load{namespace=~"ocscp"} |

**Table 7-41 Peer LCI Rx Rate**

| Field       | Details                                                          |
|-------------|------------------------------------------------------------------|
| Description | Rate of messages received with NF's LCI header.                  |
| Expression  | sum(irate(ocscp_metric_nf_lci_rx_total{namespace=~"ocscp"}[2m])) |

**Table 7-42 Peer LCI Tx Rate**

| Field       | Details                                                          |
|-------------|------------------------------------------------------------------|
| Description | Rate of messages forwarded with NF's LCI header.                 |
| Expression  | sum(irate(ocscp_metric_nf_lci_tx_total{namespace=~"ocscp"}[2m])) |



**Table 7-43 Ingress Rate Limit - Request Throttle Rate**

| Field       | Details                                                                                                                                                                    |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of requests throttled due to ingress rate limitations.                                                                                                              |
| Expression  | sum(irate(ocscp_metric_ingress_rate_limiting_throttle_req_total{namespace="ocscp"}[2m]))by(ocscp_consumer_fqdn, ocscp_configured_ingress_rate, ocscp_ingress_rl_bucketkey) |

**Table 7-44 Ingress Rate Limit - Rate Limit Not Applied Rate**

| Field       | Details                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of requests routed without ingress rate limiting treatment.                                                              |
| Expression  | sum(irate(ocscp_metric_ingress_rate_limiting_not_applied_req_total{namespace="ocscp"}[2m]))by(ocscp_consumer_fqdn, ocscp_cause) |

**Table 7-45 Egress Rate Limit - Request Throttle Rate**

| Field       | Details                                                                                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of requests throttled due to egress rate limiting.                                                                                                                                                                           |
| Expression  | sum(irate(ocscp_metric_egress_rate_limiting_throttle_req_total{namespace="ocscp"}[2m]))by(ocscp_nf_type, ocscp_producer_host, ocscp_nf_service_type, ocscp_configured_egress_rate, ocscp_egress_rl_bucketkey, ocscp_nf_instance_id) |

**Table 7-46 Egress Rate Limit - Rate Limit Not Applied Rate**

| Field       | Details                                                                                                                                       |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Description | Number of requests routed without egress rate limiting treatment.                                                                             |
| Expression  | sum(irate(ocscp_metric_egress_rate_limiting_not_applied_req_total{namespace="ocscp"}[2m]))by(ocscp_nf_type, ocscp_producer_host, ocscp_cause) |

**Table 7-47 SCP Cache Size**

| Field       | Details                                    |
|-------------|--------------------------------------------|
| Description | Coherence cache size for different caches. |
| Expression  | coherence_cache_size                       |

**Table 7-48 SCP Cache Hits**

| Field       | Details                                                           |
|-------------|-------------------------------------------------------------------|
| Description | Number of coherence cache hits.                                   |
| Expression  | sum(irate(coherence_cache_hits{namespace="ocscp"}[2m])) by (name) |

**Table 7-49 Message Request Rate Per Rate Limit Bucket Key**

| Field       | Details                                      |
|-------------|----------------------------------------------|
| Description | Rate of request received per rate limit key. |

**Table 7-49 (Cont.) Message Request Rate Per Rate Limit Bucket Key**

| Field      | Details                                                                                          |
|------------|--------------------------------------------------------------------------------------------------|
| Expression | sum(irate(ocscp_metric_message_current_request_rate_total{namespace="ocscp"}[2m]))by (bucketKey) |

**Table 7-50 SCP OCI Conveyance Rate**

| Field       | Details                                                               |
|-------------|-----------------------------------------------------------------------|
| Description | Number of messages with SCP's OCI conveyed to peers.                  |
| Expression  | sum(irate(ocscp_worker_oci_conveyance_total{namespace=~"ocscp"}[2m])) |

**Table 7-51 Peer OCI Conveyance Rate**

| Field       | Details                                                                    |
|-------------|----------------------------------------------------------------------------|
| Description | Number of messages with a peer's OCI conveyed to peers.                    |
| Expression  | sum(irate(ocscp_worker_peer_oci_conveyance_total{namespace=~"ocscp"}[2m])) |

**Table 7-52 OCI Enforced Rate**

| Field       | Details                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------|
| Description | Number of messages on which OCI is enforced that are either rerouted to alternate NFs or an error response is sent. |
| Expression  | sum(irate(ocscp_worker_oci_enforced_total{namespace=~"ocscp"}[2m]))                                                 |

**Table 7-53 OCI Unsupported Rx Rate**

| Field       | Details                                                                         |
|-------------|---------------------------------------------------------------------------------|
| Description | Number of messages received with unsupported scope.                             |
| Expression  | sum(irate(ocscp_worker_rx_unsupported_oci_scope_total{namespace=~"ocscp"}[2m])) |

**Table 7-54 SCP Worker - Mediation Tx Requests Rate**

| Field       | Details                                                                        |
|-------------|--------------------------------------------------------------------------------|
| Description | The total number of messages that forwarded to the mediation service from SCP. |
| Expression  | sum(irate(ocscp_mediation_http_tx_total{namespace="ocscp"}[2m])) by (pod)      |

**Table 7-55 SCP Worker -Mediation Rx Response Rate**

| Field       | Details                                                                                  |
|-------------|------------------------------------------------------------------------------------------|
| Description | The total number of messages that the mediation service sends back as a response to SCP. |
| Expression  | sum(irate(ocscp_mediation_http_rx_total{namespace="ocscp"}[2m])) by (pod)                |

**Table 7-56 SCP Worker - Mediation Upstream Service Time**

| Field       | Details                                                                                                                |
|-------------|------------------------------------------------------------------------------------------------------------------------|
| Description | This indicates the total time taken by the mediation to process the request.                                           |
| Expression  | sum(irate(ocscp_mediation_upstream_service_time_ms_total{namespace="ocscp"}[2m])) by (ocscp_med_upstream_service_time) |

## 7.2 Traces

The following table provides information of traces for SCP.

**Table 7-57 SCP Traces**

| Field Name                | Description                                                                                                                                                        |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| component                 | The software package, framework, library, or module that generated the associated Span.<br><b>Request or Response Type</b><br>: common                             |
| node_id                   | Local information.<br><b>Request or Response Type</b><br>: common                                                                                                  |
| method                    | HTTP method of the request for the associated Span. Example: "GET", "POST".<br><b>Request or Response Type</b><br>: request,common                                 |
| scheme                    | Url scheme is http.<br><b>Request or Response Type</b><br>: request                                                                                                |
| authority                 | Authority give you details about registered name or server address, along with optional port and user information.<br><b>Request or Response Type</b><br>: request |
| path                      | A path consists of a sequence of path segments separated by a slash ("/") character.<br><b>Request or Response Type</b><br>: request                               |
| 3gpp-sbi-message-priority | This header shall be included in HTTP/2 messages when a priority for the message needs to be conveyed.<br><b>Request or Response Type</b><br>: request             |
| x-forwarded-for           | To identify the originating IP address of a client.<br><b>Request or Response Type</b><br>: request                                                                |
| x-forwarded-proto         | To determine the protocol used between the client and SCP.<br><b>Request or Response Type</b><br>: request                                                         |
| x-envoy-internal          | service wants to know whether a request is internal origin or not.<br><b>Request or Response Type</b><br>: request                                                 |

Table 7-57 (Cont.) SCP Traces

| Field Name                    | Description                                                                                                                                                                                              |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| via                           | It is used for tracking message forwards, avoiding request loops, and identifying the protocol capabilities of senders along the request/response chain.<br><b>Request or Response Type</b><br>: request |
| x-request-id                  | The x-request-idheader is used to uniquely identify a request as well as perform stable access logging and tracing.<br><b>Request or Response Type</b><br>: common                                       |
| payload                       | http request body.<br><b>Request or Response Type</b><br>: request, common                                                                                                                               |
| status                        | To determine the http request has been succeeded or not.<br><b>Request or Response Type</b><br>: response                                                                                                |
| content-type                  | The Content-Type entity header is used to indicate the media type of the resource.<br><b>Request or Response Type</b><br>: response                                                                      |
| content-length                | The Content-Length header indicates the size of the entity body in the message, in bytes.<br><b>Request or Response Type</b><br>: response                                                               |
| server                        | The Server response-header field contains information about the software used by the origin server to handle the request.<br><b>Request or Response Type</b><br>: response                               |
| date                          | The time and date, when the request is processed.<br><b>Request or Response Type</b><br>: response                                                                                                       |
| x-envoy-upstream-service-time | Contains the time in milliseconds spent by the upstream host processing the request.<br><b>Request or Response Type</b><br>: response                                                                    |
| location                      | To provide information about the location of a newly created resource.<br><b>Request or Response Type</b><br>: response                                                                                  |
| payload                       | http response body.<br><b>Request or Response Type</b><br>: response                                                                                                                                     |
| http.url                      | Specifies the request's URL.<br><b>Request or Response Type</b><br>: request, common                                                                                                                     |
| downstream_cluster            | A downstream host connects to Envoy, sends requests, and receives responses.<br><b>Request or Response Type</b><br>: common                                                                              |

Table 7-57 (Cont.) SCP Traces

| Field Name       | Description                                                                                                                                                                                                                          |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| user_agent       | When your browser connects to a website, it includes a User-Agent field in its HTTP header.<br><b>Request or Response Type</b><br>: request, common                                                                                  |
| http.protocol    | The communication between client and server over HTTP/2.<br><b>Request or Response Type</b><br>: common                                                                                                                              |
| request_size     | HTTP header size.<br><b>Request or Response Type</b><br>: common                                                                                                                                                                     |
| upstream_cluster | An upstream host receives connections and requests from Envoy and returns responses.<br><b>Request or Response Type</b><br>: common                                                                                                  |
| http.status_code | HTTP response status code for the associated Span. Example: 200, 503, 404<br><b>Request or Response Type</b><br>: common                                                                                                             |
| response_size    | HTTP header size.<br><b>Request or Response Type</b><br>: common                                                                                                                                                                     |
| response_flag    | Additional details about the response or connection, if any.<br><b>Request or Response Type</b><br>: common                                                                                                                          |
| span.kind        | Specifies the role of the span in a RPC communication. In case of HTTP communication it is searching client and server values for this tag.<br><b>Request or Response Type</b><br>: common                                           |
| error            | True, if and only if, the application considers the operation represented by the Span to have failed.<br><b>Request or Response Type</b><br>: common                                                                                 |
| x-request-id     | The x-request-id header is used by Envoy to uniquely identify a request as well as perform stable access logging and tracing<br><b>Request or Response Type</b><br>: request                                                         |
| x-b3-traceid     | The x-b3-traceid HTTP header is used by the Zipkin tracer in Envoy. The TraceId is 64-bit in length and indicates the overall ID of the trace. Every span in a trace shares this ID.<br><b>Request or Response Type</b><br>: request |
| x-b3-spanid      | The x-b3-spanid HTTP header is used by the Zipkin tracer in Envoy. The SpanId is 64-bit in length and indicates the position of the current operation in the trace tree.<br><b>Request or Response Type</b><br>: request             |

Table 7-57 (Cont.) SCP Traces

| Field Name                     | Description                                                                                                                                                                                                                    |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| x-b3-sampled                   | The x-b3-sampledHTTP header is used by the Zipkin tracer in Envoy. When the sampled flag is either not specified or set to 1, the span will be reported to the tracing system.<br><b>Request or Response Type</b><br>: request |
| ueidentitytype                 | NF type.<br><b>Request or Response Type</b><br>: request                                                                                                                                                                       |
| ueidentityvalue                | SUPI range for NF type.<br><b>Request or Response Type</b><br>: request                                                                                                                                                        |
| x-envoy-expected-rq-timeout-ms | This is the time in milliseconds the router expects the request to be completed.<br><b>Request or Response Type</b><br>: request                                                                                               |

# 8

## SCP Interactions with NRF

SCP allows configuration of multiple NRF sets and determines the network topology with all the configured NRF sets.

SCP can register with an NRF instance as per priority and capacity in each configured NRF set. You can configure an SCP profile at the time of deployment. SCP sends NF details for heartbeat with NRF and updates the mate SCP information in the NF profile after the deployment.

SCP subscribes to any NF status change notification for all the 5G NF types with one of the available NRF instances as per priority and capacity in each configured NRF set using NFStatusSubscribe, NFStatusUnsubscribe, and NFStatusNotify service operations of the Nnrf\_NFManagement service. NF suspended and deregistered notification removes the detected NF information and updates the routing information as required.


SCP performs periodic 5G NF topology audits with one of the available NRF instances as per priority and capacity in each configured NRF set using the NFListRetrieval and NFProfileRetrieval service operations of the Nnrf\_NFManagement service if nnrf-mgmt services is configured for audit, or SCP can learn profiles using the NRF discovery service if nnrf-disc is configured for audit.

SCP maintains servingScope (serving locality) to SCP instance mapping when it gets NF status change notification from NRF for any other SCP instance that can be used for routing or forwarding the service request between SCP instances wherever applicable.

SCP determines all the SCP instances from NF-SetId published in the SCP profile. SCP instances are identified and grouped based on their respective NFSetId published.

### **Producer NF Registration Notification from NRF to SCP**

The following image is an example of a scenario that describes how SCP receives producer NF registration notifications from NRF instances.

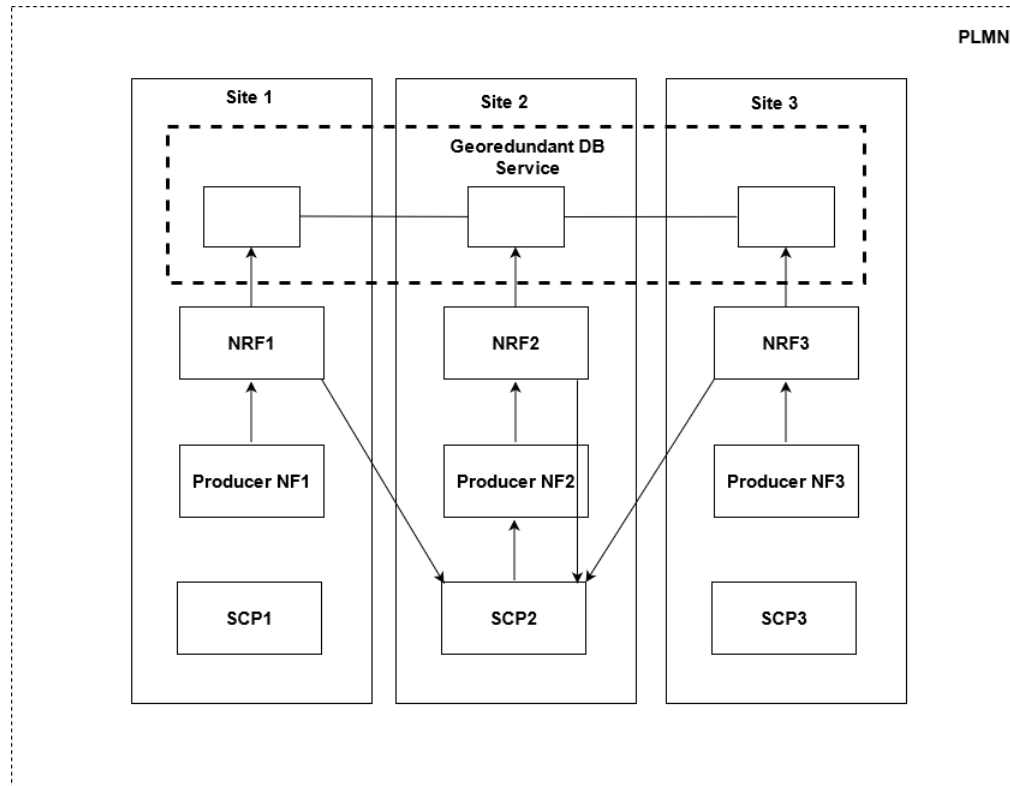**Figure 8-1 Producer NF Registration Notification from NRF to SCP**

There are three NRF instances, NRF1, NRF2, and NRF3, which are deployed as georedundant NRFs across three sites, in an NRF set. SCP1 and SCP3 do not establish communication with the corresponding NRF instances such as NRF1 and NRF3. However, SCP2 subscribes with NRF2 for all changes for 5G NF types. When producer NF1, NF2, and NF3 register with NRF1, NRF2, and NRF3, respectively, SCP2 receives notification regarding producer NF1, NF2, and NF3 registration from NRF1, NRF2, and NRF3.

SCP uses the `nfStatusNotificationUri` callback URI to receive notifications from NRF. `nfStatusNotificationUri` notifies SCP about registrations, deregistrations, or profile changes of any NF profile. To subscribe to NRF notifications, SCP uses the POST method.

The following format of the callback URI is used by SCP in Subscription requests:

```
http://<scp-worker FQDN or IP>:<scp-worker
Port>/ocscp/scpc-notification/v1/notification/<nrfRegionSetID>/<nftype>/
<UUID>
```

Where,

- The FQDN or IP address is determined by the deployment configuration.
- scp-worker Port indicates the service port of SCP-Worker.




- `nrfRegionSetID` indicates the NRF's region or SetID based on the NRF configuration used during deployment.
- `nfType` indicates the NF type to which the Subscription is sent.
- `UUID` is the Universally Unique ID.

SCP can process notifications containing full NFProfiles that is `nfProfile` or partial profiles that is `profileChanges`. For more information about `nfStatusNotificationUri`, see 3GPP 29.510.

### 5G NF Topology Audit Response from NRF

The following image is an example of a scenario that describes how SCP receives 5G NF topology audit response from NRF.

**Figure 8-2 5G NF Topology Audit Response from NRF**

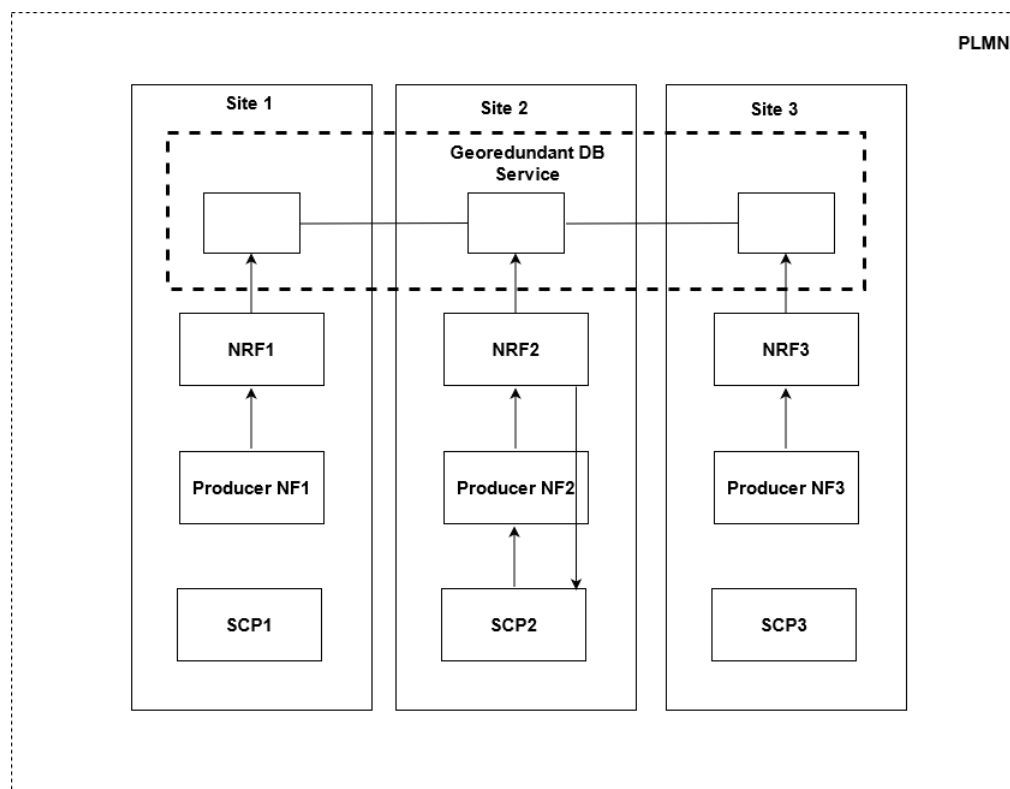

There are three NRF instances, NRF1, NRF2, and NRF3, which are deployed as georedundant NRFs across three sites, in an NRF set. Producer NF1, NF2, and NF3 register with NRF1, NRF2, and NRF3, respectively. SCP1 and SCP3 do not establish communication with the corresponding NRF instances such as NRF1 and NRF3. When SCP2 performs period audit for 5G NF types with NRF2, SCP2 receives audit response from NRF2 with all producer NF1, NF2, and NF3 irrespective of where they are registered.

## 9

# Supported Query Parameters

This section is applicable for the Managing Delegated Discovery Response Caching for Subscriber IDs feature.

**Table 9-1 Supported Query Parameter**

| Name                       | Data Type          | Subscriber Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------|--------------------|---------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| target-nf-type             | NFType             | No                        | M | This Information Element (IE) contains the NF type of the target NF being discovered.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| requester-nf-type          | NFType             | No                        | M | This IE contains the NF type of the Requester NF invoking the Nnrf_NFDiscovery service.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| requester-nf-instance-id   | NfInstanceId       | No                        | O | If present, this IE contains the NF instance ID of the Requester NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| service-names              | array(ServiceName) | No                        | O | If this IE is included, it will contain an array of service names for which the NRF is requested to provide the list of NF profiles. The NRF will return the NF profiles that have at least one NF service matching the service names specified in this list. The returned NF service names from the NRF will be an interclause of the requested NF service names and the NF service names registered in the NF profile.<br><br>If this IE is not included, the NRF will return all the NF service names registered in the NF profile. The list contains unique items.                                                                                                                                                                                                                              |
| requester-nf-instance-fqdn | Fqdn               | No                        | O | This IE might be present for an NF discovery request within the same PLMN as the NRF. If included, this IE must contain the Fully Qualified Domain Name (FQDN) of the Requester NF that is invoking the Nnrf_NFDiscovery service. The NRF must use this to return only those NF profiles that include at least one NF service containing an entry in the 'allowedNfDomains' list (see clause 6.1.6.2.3) that matches the domain of the requester NF. This IE is ignored by the NRF if received from a requester NF belonging to a different PLMN.                                                                                                                                                                                                                                                   |
| target-plmn-list           | array(PlmnId)      | No                        | C | This IE is included when NF services in a different PLMN, or NF services of specific PLMN IDs in the same PLMN comprising multiple PLMN IDs, need to be discovered. When included, this IE will contain the target NF's PLMN ID. If more than one PLMN ID is included, NFs from any PLMN ID present in the list match the query parameter.<br><br>When inter-PLMN service discovery occurs, the list should contain no more than one PLMN ID. This ID should appear in the service discovery request from the NF in the source PLMN to the NRF in the same PLMN, but it might not appear in the service discovery request from the source NRF to the target NRF. In such a case, if the NRF receives more than 1 PLMN ID, it will only consider the first element of the array and ignore the rest. |

Table 9-1 (Cont.) Supported Query Parameter

| Name                  | Data Type        | Subscriber Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------|------------------|---------------------------|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| requester-plmn-list   | array(PlmnId)    | No                        | C | This IE is included when NF services in a different PLMN need to be discovered. When included, this IE shall contain the PLMN ID(s) of the requester NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| requester-snpn-list   | array(PlmnIdNid) | No                        | C | <p>This IE is included when the requester NF belongs to one or several SNPNs and the NF services of a specific SNPN need to be discovered.</p> <p>When present, this IE shall contain the requester NF's SNPN ID(s).</p> <p>The NRF uses this to return only those NF profiles of NF instances that are allowed to be discovered from the SNPNs identified by this IE, according to the "allowedSnpons" list in the NF Profile and NF Service (see clauses 6.1.6.2.2 and 6.1.6.2.3).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| target-nf-instance-id | NfInstanceId     | No                        | O | Identity of the NF instance being discovered.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| target-nf-fqdn        | Fqdn             | No                        | O | FQDN of the target NF instance being discovered.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| hnrf-uri              | Uri              | No                        | C | If included, this IE shall contain the API URI of the home NRF's NFDISCOVERY Service (see clause 6.2.1). It shall be included if the Requester NF has previously received such an API URI to be used for service discovery (e.g., from the NSSF in the home PLMN).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| snssais               | array(Snssai)    | No                        | O | <p>If included, this IE shall contain the list of S-NSSAIs that are served by the NF (service) instances being discovered. The NRF shall return those NF profiles or NF services of NF (service) instances that have at least one of the S-NSSAIs in this list. The S-NSSAIs included in the NF profiles or NF services of NF (service) instances returned by the NRF shall be an interclause of the S-NSSAIs requested and the S-NSSAIs supported by those NF (service) instances. (NOTE 10)</p> <p>When the NF Profile of the NF Instances being discovered has defined the list of supported S-NSSAIs in the "perPlmnSnssaiList", the discovered NF Instances shall be those having any of the S-NSSAIs included in this "snssais" parameter in any of the PLMNs included in the "target-plmn-list" attribute, if present; if the "target-plmn-list" is not included, the NRF shall assume that the discovery request is for any of the PLMNs it supports.</p> |
| requester-snssais     | array(Snssai)    | No                        | O | <p>If included, this IE shall contain the list of S-NSSAI of the requester NF. If this IE is included in a service discovery in a different PLMN, the requester NF shall provide S-NSSAI values of the target PLMN that correspond to the S-NSSAI values of the requester NF.</p> <p>The NRF shall use this to return only those NF profiles of NF instances allowed to be discovered from at least one network slice identified by this IE, according to the "allowedNssais" list in the NF Profile and NF Service (see clauses 6.1.6.2.2 and 6.1.6.2.3). (NOTE 12)</p>                                                                                                                                                                                                                                                                                                                                                                                          |

Table 9-1 (Cont.) Supported Query Parameter

| Name                                | Data Type          | Subscriber Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------|--------------------|---------------------------|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| plmn-specific-snssai-list           | array(Plmn Snssai) | No                        | O | If included, this IE shall contain the list of S-NSSAI that are served by the NF service being discovered for the corresponding PLMN provided. The NRF shall use this to identify the NF services that have registered their support for the S-NSSAIs for the corresponding PLMN given. The NRF shall return the NF profiles that have at least one S-NSSAI supported in any of the PLMNs provided in this list. The per PLMN list of S-NSSAIs included in the NF profile returned by the NRF shall be an interclause of the list requested and the list registered in the NF profile. (NOTE 10). |
| requester-plmn-specific-snssai-list | array(Plmn Snssai) | No                        | O | If included, this IE shall contain the list of S-NSSAI of the requester NF for each of the PLMNs it supports. The NRF shall use this to return only those NF profiles of NF instances allowed to be discovered from at least one network slice identified by this IE, according to the "allowedNssais" and "allowedPlmns" attributes in the NF Profile and NF Service (see clauses 6.1.6.2.2 and 6.1.6.2.3). (NOTE 12)                                                                                                                                                                            |
| nsi-list                            | array(string)      | No                        | O | If included, this IE shall contain the list of NSI IDs that are served by the services being discovered.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| dnn                                 | Dnn                | -                         | O | If included, this IE shall contain the DNN for which NF services serving that DNN were discovered. DNN may be included if the target NF type is, for example, "BSF," "SMF," "PCF," "PCSCF," or "UPF".<br><br>The DNN shall contain the network identifier, and it may additionally contain an operator identifier. (NOTE 11).<br><br>If the Snssai(s) are also included, the NF services serving the DNN will be available in the network slice(s) identified by the Snssai(s).                                                                                                                   |
| smf-serving-area                    | string             | No                        | O | If included, this IE shall contain the serving area of the SMF. It may be included if the target NF type is "UPF".                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| tai                                 | Tai                | No                        | O | Tracking Area Identity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| amf-region-id                       | AmfRegionId        | No                        | O | AMF Region Identity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| amf-set-id                          | AmfSetId           | No                        | O | AMF Set Identity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| guami                               | Guami              | No                        | O | Guami used to search for an appropriate AMF. (NOTE 1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| supi                                | Supi               | Yes                       | O | If included, this IE shall contain the SUPI of the requester UE to search for an appropriate NF. SUPI may be included if the target NF type is, for example, "PCF," "CHF," "AUSF," "UDM," or "UDR."                                                                                                                                                                                                                                                                                                                                                                                               |
| ue-ipv4-address                     | Ipv4Addr           | Yes                       | O | The IPv4 address of the UE for which a BSF or P-CSCF needs to be discovered.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| ip-domain                           | string             | Yes                       | O | The IPv4 address domain of the UE for which a BSF needs to be discovered.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| ue-ipv6-prefix                      | Ipv6Prefix         | Yes                       | O | The IPv6 prefix of the UE for which a BSF or P-CSCF needs to be discovered.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

Table 9-1 (Cont.) Supported Query Parameter

| Name                    | Data Type        | Subscriber Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------|------------------|---------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| pgw-ind                 | boolean          | No                        | O | When present, this IE indicates whether a combined SMF/PGW-C or a standalone SMF needs to be discovered.<br>true: A combined SMF/PGW-C is requested to be discovered;<br>false: A standalone SMF is requested to be discovered.                                                                                                                                                      |
| pgw                     | Fqdn             | No                        | O | If included, this IE shall contain the PGW FQDN, which is received by the AMF from the MME to find the combined SMF or PGW.                                                                                                                                                                                                                                                          |
| gpsi                    | Gpsi             | Yes                       |   | If included, this IE shall contain the GPSI of the requester UE to search for an appropriate NF. GPSI may be included if the target NF type is "CHF," "PCF," "UDM," or "UDR."                                                                                                                                                                                                        |
| external-group-identity | ExtGroupId       | Yes                       | O | If included, this IE shall contain the external group identifier of the requester UE to search for an appropriate NF. This may be included if the target NF type is "UDM" or "UDR."                                                                                                                                                                                                  |
| pfd-data                | PfdData          | No                        | O | When present, this IE shall contain the application identifiers and/or application function identifiers in PFD management. This may be included if the target NF type is "NEF".<br>The NRF shall return those NEF instances that can provide the PFDs for at least one of the provided application identifiers or for at least one of the provided application function identifiers. |
| data-set                | DataSetId        | No                        | O | Indicates the data set to be supported by the NF to be discovered. May be included if the target NF type is "UDR."                                                                                                                                                                                                                                                                   |
| routing-indicator       | string           | Yes                       | O | Routing indicator information that allows to route network signaling with SUCI (see 3GPP 23.003 [12]) to an AUSF and UDM instance capable of serving the subscriber. May be included if the target NF type is "AUSF" or "UDM."<br>Pattern: "^[0-9]{1,4}\$"                                                                                                                           |
| group-id-list           | array(NfGroupId) | No                        |   | Identity of the groups of the NFs of the target NF type to be discovered. May be included if the target NF type is "UDR," "UDM," "HSS," "PCF," "AUSF," or "CHF."                                                                                                                                                                                                                     |
| dnai-list               | array(Dnai)      | No                        |   | If included, this IE shall contain the data network access identifiers. It may be included if the target NF type is "UPF."                                                                                                                                                                                                                                                           |
| upf-iwk-eps-ind         | Boolean          | No                        | O | When present, this IE indicates whether a UPF supporting interworking with EPS needs to be discovered.<br>true: A UPF supporting interworking with EPS is requested to be discovered;<br>false: A UPF not supporting interworking with EPS is requested to be discovered.                                                                                                            |
| chf-supported-plmn      | PlmnId           | No                        | O | If included, this IE shall contain the PLMN ID that a CHF supports (for example, in the PlmnRange of ChfInfo attribute in the NFProfile). This IE may be included when the target NF type is "CHF."                                                                                                                                                                                  |

Table 9-1 (Cont.) Supported Query Parameter

| Name               | Data Type                | Subscribe Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------|--------------------------|--------------------------|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| preferred-locality | string                   | No                       | O | Preferred target NF location (for example, geographic location, data center).<br>When present, the NRF shall prefer NF profiles with a locality attribute that matches the preferred locality.<br>The NRF may return additional NFs in the response not matching the preferred target NF location, for example, if no NF profile is found matching the preferred target NF location.<br>The NRF should set a lower priority for any additional NFs on the response not matching the preferred target NF location than those matching the preferred target NF location.<br>(NOTE 6)                                      |
| access-type        | AccessType               | No                       | C | If included, this IE shall contain the access type that is required to be supported by the target NF, such as SMF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| supported-features | Supported Features       | No                       | O | List of features required to be supported by the target NF.<br>This IE may be present only if the service-names attribute is present and if it contains a single service name. Otherwise, the NRF will ignore it.<br>(NOTE 4)                                                                                                                                                                                                                                                                                                                                                                                           |
| required-features  | array(SupportedFeatures) | No                       | O | List of features required to be supported by the target Network Function, as defined by the supportedFeatures attribute in NFService (see clauses 6.1.6.2.3 and 6.2.6.2.4).<br>This IE may be present only if the service-names attribute is present.<br>When present, the required-features attribute shall contain as many entries as the number of entries in the service-names attribute. The nth entry in the required-features attribute shall correspond to the nth entry in the service-names attribute. An entry corresponding to a service for which no specific feature is required shall be encoded as "0." |
| complex-query      | ComplexQuery             | No                       | O | This query parameter is used to override the default logical relationship of query parameters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| limit              | integer                  | No                       | O | The maximum number of NFProfiles to be returned in the response.<br>Minimum: 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| max-payload-size   | integer                  | No                       | O | Maximum payload size (before compression, if any) of the response, expressed in kilo octets.<br>When present, the NRF shall limit the number of NF profiles returned in the response so as not to exceed the maximum payload size indicated in the request.<br>Default: 124. Maximum: 2000 (such as 2 million octets).                                                                                                                                                                                                                                                                                                  |

Table 9-1 (Cont.) Supported Query Parameter

| Name                 | Data Type              | Subscribe Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------|------------------------|--------------------------|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| max-payload-size-ext | integer                | No                       | O | Maximum payload size (before compression, if any) of the response, expressed in kilo octets.<br>When present, the NRF shall limit the number of NF profiles returned in the response so as not to exceed the maximum payload size indicated in the request.<br>This query parameter is used when the consumer supports payload sizes larger than 2 million octets.<br>Default: 124 |
| pdu-session-types    | array(Pdu SessionType) | No                       | O | List of the PDU session types requested to be supported by the target Network Function (such as UPF).                                                                                                                                                                                                                                                                              |
| event-id-list        | array(EventId)         | No                       | O | If present, this attribute shall contain the list of events requested to be supported by the Nnwdaf AnalyticsInfo Service, and the NRF shall return NF, which supports all the requested events.                                                                                                                                                                                   |
| nwdaf-event-list     | array(NwdafEvent)      | No                       | O | If present, this attribute shall contain the list of events requested to be supported by the Nnwdaf_EventsSubscription service, and the NRF shall return NF, which supports all the requested events.                                                                                                                                                                              |
| atsss-capability     | AtsssCapability        | No                       | O | When present, this IE indicates the ATSSS capability of the target UPF needs to be supported.                                                                                                                                                                                                                                                                                      |
| upf-ue-ip-addr-ind   | boolean                | No                       | O | When present, this IE indicates whether a UPF supporting allocating UE IP addresses or prefixes needs to be discovered.<br>true: a UPF supporting UE IP addresses and prefixes is requested to be discovered;<br>false: a UPF not supporting UE IP addresses or prefix allocation is requested to be discovered.                                                                   |
| client-type          | ExternalClientType     | No                       | O | When present, this IE indicates that NF(s) dedicatedly serving the specified client type need to be discovered. This IE may be included when the target NF type is "LMF" or "GMLC".<br>If no NF profile is found dedicatedly serving the requested client type, the NRF may return NF(s) not dedicatedly serving the requested client type in the response.                        |
| lmf-id               | LMFIdentification      | No                       | O | When present, this IE shall contain LMF identification to be discovered. This may be included if the target NF type is "LMF."                                                                                                                                                                                                                                                      |
| an-node-type         | AnNodeType             | No                       | O | If included, this IE shall contain the AN Node type, which is required to be supported by the target Network Function (such as LMF).                                                                                                                                                                                                                                               |
| rat-type             | RatType                | No                       | O | If included, this IE shall contain the RAT type that is required to be supported by the target Network Function (such as LMF).                                                                                                                                                                                                                                                     |
| target-snpn          | PlmnIdNid              | No                       | C | This IE shall be included when the NF services of a specific SNPN need to be discovered. When included, this IE shall contain the PLMN ID and NID of the target NF.                                                                                                                                                                                                                |

Table 9-1 (Cont.) Supported Query Parameter

| Name                     | Data Type           | Subscriber Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------|---------------------|---------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| af-ee-data               | AfEventExposureData | No                        | O | When present, this shall contain the application events and, optionally, application function identifiers and application identifiers of the AF(s). This may be included if the target NF type is "NEF."                                                                                                                                                                                                                                                                          |
| w-agf-info               | WAgfInfo            | No                        | O | If included, this IE shall contain the W-AGF identifiers of N3 terminations which is received by the SMF to find the combined W-AGF/UPF.                                                                                                                                                                                                                                                                                                                                          |
| tngf-info                | TngfInfo            | No                        | O | If included, this IE shall contain the TNGF identifiers of N3 terminations which is received by the SMF to find the combined TNGF or UPF.                                                                                                                                                                                                                                                                                                                                         |
| twif-info                | TwifInfo            | No                        | O | If included, this IE shall contain the TWIF identifiers of N3 terminations which is received by the SMF to find the combined TWIF or UPF.                                                                                                                                                                                                                                                                                                                                         |
| target-nf-set-id         | NfSetId             | No                        | O | When present, this IE shall contain the target NF Set ID (as defined in clause 28.12 of 3GPP TS 23.003 [12]) of the NF instances being discovered.                                                                                                                                                                                                                                                                                                                                |
| target-nf-service-set-id | NfServiceSetId      | No                        | O | When present, this IE shall contain the target NF Service Set ID (as defined in clause 28.13 of 3GPP TS 23.003 [12]) of the NF service instances being discovered.                                                                                                                                                                                                                                                                                                                |
| preferred-tai            | Tai                 | No                        | O | When present, the NRF shall prefer NF profiles that can serve the TAI, or the NRF shall return NF profiles not matching the TAI if no NF profile is found matching the TAI. (NOTE 5)                                                                                                                                                                                                                                                                                              |
| nef-id                   | NefId               | No                        | O | When present, this IE shall contain the NEF ID of the NEF to be discovered. This may be included if the target NF type is "NEF." (NOTE 7)                                                                                                                                                                                                                                                                                                                                         |
| preferred-nf-instances   | array(NfInstanceId) | No                        | O | When present, this IE shall contain a list of preferred candidate NF instance IDs. (NOTE 8)                                                                                                                                                                                                                                                                                                                                                                                       |
| notification-type        | NotificationType    | No                        | O | If included, this IE shall contain the notification type of default notification subscriptions that shall be registered in the NFProfile or NFService of the NF Instances being discovered. The NF profiles returned by the NRF shall contain all the registered default notification subscriptions, including the one corresponding to the notification-type parameter. (NOTE 9)                                                                                                 |
| n1-msg-class             | N1MessageClass      | No                        | O | This IE may be included when the "notification-type" IE is present with the value "N1_MESSAGES".<br>When included, this IE shall contain the N1 message class of default notification subscriptions that shall be registered in the NFProfile or NFService of the NF Instances being discovered. The NF profiles returned by the NRF shall contain all the registered default notification subscriptions, including the one corresponding to the n1-msg-class parameter. (NOTE 9) |



Table 9-1 (Cont.) Supported Query Parameter

| Name                    | Data Type          | Subscribe Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------|--------------------|--------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| n2-info-class           | N2InformationClass | No                       | O | This IE may be included when the "notification-type" IE is present with the value "N2_INFORMATION."<br>If included, this IE shall contain the notification type of default notification subscriptions that shall be registered in the NFProfile or NFService of the NF Instances being discovered. The NF profiles returned by the NRF shall contain all the registered default notification subscriptions, including the one corresponding to the n2-info-class parameter.<br>(NOTE 9) |
| serving-scope           | array(string)      | No                       | O | If present, this attribute shall contain the list of areas that can be served by the NF instances to be discovered. The NRF shall return NF profiles of NFs that can serve all the areas requested in this query parameter.                                                                                                                                                                                                                                                             |
| imsi                    | string             | No                       | O | If included, this IE shall contain the IMSI of the requester UE to search for an appropriate NF. IMSI may be included if the target NF type is "HSS".<br>pattern: "[0-9]{5,15}"                                                                                                                                                                                                                                                                                                         |
| ims-private-identity    | string             | No                       | O | If included, this IE shall contain the IMS private identity of the requester UE to search for an appropriate NF. IMS Private Identity may be included if the target NF type is "HSS."                                                                                                                                                                                                                                                                                                   |
| ims-public-identity     | string             |                          |   | If included, this IE shall contain the IMS public identity of the requester UE to search for an appropriate NF. IMS Public Identity may be included if the target NF type is "HSS."                                                                                                                                                                                                                                                                                                     |
| msisdn                  | string             |                          |   | If included, this IE shall contain the MSISDN of the requester UE to search for an appropriate NF. IMS Public Identity may be included if the target NF type is "HSS".                                                                                                                                                                                                                                                                                                                  |
| internal-group-identity | GroupId            | No                       | O | If included, this IE shall contain the internal group identifier of the UE to search for an appropriate NF. This may be included if the target NF type is "UDM."                                                                                                                                                                                                                                                                                                                        |

Table 9-1 (Cont.) Supported Query Parameter

| Name                   | Data Type   | Subscriber Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------|-------------|---------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| preferred-api-versions | map(string) | No                        | O | <p>When present, this IE indicates the preferred API version of the services that are supported by the target NF instances. The key of the map is the service name (see clause 6.1.6.3.11) for which the preferred API version is indicated. Each element carries the API version indication for the service indicated by the key. The NRF may return additional NFs in the response not matching the preferred API versions, for example, if no NF profile is found matching the preferred- API -versions.</p> <p>An API Version Indication is a string formatted as {operator}{API Version}.</p> <p>The following operators will be supported:</p> <ul style="list-style-type: none"> <li>"=" matches a version equal to the version value indicated.</li> <li>"=" matches a version equal to the version value indicated.</li> <li>"&gt;" matches any version greater than the version value indicated.</li> <li>"&gt;=" matches any version greater than or equal to the version value indicated.</li> <li>"&lt;" matches any version less than the version value indicated.</li> <li>"&lt;=" matches any version less than or equal to the version value indicated.</li> <li>"^" matches any version compatible with the version indicated, such as, any version with the same major version as the version indicated.</li> </ul> <p>Precedence between versions is identified by comparing the Major, Minor, and Patch version fields numerically, from left to right.</p> <p>If no operator or an unknown operator is provided in API Version Indication, "=" operator is applied.</p> <p>Example of API Version Indication:</p> <p>Case1: "=1.2.4.operator-ext" or "1.2.4.operator-ext" means matching the service with API version "1.2.4.operator-ext"</p> <p>Case2: "&gt;1.2.4" means matching the service with API versions greater than "1.2.4"</p> <p>Case3: "^2.3.0" or "^2" means matching the service with all API versions with major version "2".</p> |
| v2x-support-ind        | boolean     | No                        | O | <p>When present, this IE indicates whether a PCF supporting V2X policy or parameter provisioning needs to be discovered.</p> <p>true: a PCF supporting V2X policy or parameter provisioning is requested to be discovered;</p> <p>false: a PCF not supporting V2X policy or parameter provisioning is requested to be discovered.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

Table 9-1 (Cont.) Supported Query Parameter

| Name                | Data Type     | Subscriber Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------|---------------|---------------------------|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| redundant-gtpu      | boolean       | No                        | O | When present, this IE indicates whether a UPF supporting redundant GTP-U paths needs to be discovered.<br>true: a UPF supporting redundant GTP-U paths is requested to be discovered;<br>false: a UPF not supporting redundant GTP-U paths is requested to be discovered.                                                                                                                                                                                                                                                                                                            |
| redundant-transport | boolean       | No                        | O | When present, this IE indicates whether a UPF supporting redundant transport paths on the transport layer in the corresponding network slice needs to be discovered.<br>true: a UPF supporting redundant transport paths on the transport layer is requested to be discovered;<br>false: a UPF not supporting redundant transport paths on the transport layer is requested to be discovered.<br><br>If the Snssai(s) are also included, the UPF supporting redundant transport paths on the transport layer shall be available in the network slice(s) identified by the Snssai(s). |
| ipups               | boolean       | No                        | O | When present, this IE indicates whether a UPF that is configured for IPUPS is requested to be discovered.<br>true: a UPF that is configured for IPUPS is requested to be discovered;<br>false: a UPF that is not configured for IPUPS is requested to be discovered.                                                                                                                                                                                                                                                                                                                 |
| scp-domain-list     | array(string) | No                        | O | When present, this IE shall contain the SCP domains the target NF or SCP belongs to. The NRF shall return NF or SCP profiles that belong to all the SCP domains provided in this list.                                                                                                                                                                                                                                                                                                                                                                                               |
| address-domain      | Fqdn          | No                        | O | If included, this IE shall contain the address domain that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP."                                                                                                                                                                                                                                                                                                                                                                                                                             |
| ipv4-addr           | Ipv4Addr      | No                        | O | If included, this IE shall contain the IPv4 address that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP."                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ipv6-prefix         | Ipv6Prefix    | No                        | O | If included, this IE shall contain the IPv6 prefix that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP".                                                                                                                                                                                                                                                                                                                                                                                                                                |
| served-nf-set-id    | NfSetId       | No                        | O | When present, this IE shall contain the NF Set ID that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP".                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| remote-plmn-id      | PlmnId        | No                        | O | If included, this IE shall contain the remote PLMN ID that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP".                                                                                                                                                                                                                                                                                                                                                                                                                             |

Table 9-1 (Cont.) Supported Query Parameter

| Name                | Data Type          | Subscriber Id (Yes or No) | P | Description                                                                                                                                                                                                                                                                                                                                    |
|---------------------|--------------------|---------------------------|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| data-forwarding     | boolean            | No                        | O | This may be included if the target NF type is "UPF." (NOTE 13)<br>When present, the IE indicates whether UPFs configured for data forwarding need to be discovered.<br>true: UPF(s) configured for data forwarding are requested to be discovered;<br>false: UPF(s) not configured for data forwarding are requested to be discovered.         |
| preferred-full-plmn | boolean            | No                        | O | When present, the NRF shall prefer NF profile(s) that can serve the full PLMN (can serve any TAI in the PLMN), or the NRF shall return other NF profiles if no NF profile serving the full PLMN is found:<br>true: NF instances serving the full PLMN are preferred;<br>false: NF instances serving the full PLMN are not preferred. (NOTE 14) |
| requester-features  | Supported Features | No                        | C | Nnrf_NFDiscovery features are supported by the Requester NF that is invoking the Nnrf_NFDiscovery service.<br>The Requester NF shall include this IE if it supports at least one of the following features:<br>- Service-Map<br>This IE may be included elsewhere.                                                                             |
| realm-id            | string             | No                        | O | May be included if the target NF type is "UDSF." If included, this IE shall contain the realm- ID for which a UDSF shall be discovered.                                                                                                                                                                                                        |
| storage-id          | string             | No                        | O | May be included if the target NF type is "UDSF" and realm-id is included. If included, this IE shall contain the storage-id for the realm-id indicated in the realm-id IE for which a UDSF shall be discovered.                                                                                                                                |
| vsmf-support-ind    | boolean            | No                        | O | If included, this IE shall indicate that target SMF(s) that support V-SMF capability are preferred.<br>This IE may be included when the target NF type is "SMF." (NOTE 15)                                                                                                                                                                     |
| gmlc-number         | string             | No                        | O | If included, this IE shall contain the GMLC number, which should be supported by the target GMLC. It may be included if the target NF type is "GMLC."<br>Pattern: "[0-9]{5,15}\$"                                                                                                                                                              |

# 10

## Supported NF Types and Services

SCP supports the following NF types and service types. These services can be managed using routing options.

**Table 10-1 Supported NF Types and Services**

| Network Function | Service Types                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5G_EIR           | n5g-eir-eic                                                                                                                                                                                                                                                                                                                                                                                                          |
| AMF              | namf-comm, namf-evts, namf-loc, namf-mt                                                                                                                                                                                                                                                                                                                                                                              |
| AUSF             | nausf-auth, nausf-sorprotection, nausf-upuprotection                                                                                                                                                                                                                                                                                                                                                                 |
| BSF              | nbsf-management                                                                                                                                                                                                                                                                                                                                                                                                      |
| CHF              | nchf-convergedcharging, nchf-spendinglimitcontrol, nchf-spendinglimitcontrol                                                                                                                                                                                                                                                                                                                                         |
| LMF              | nlmf-loc                                                                                                                                                                                                                                                                                                                                                                                                             |
| NEF              | nnef-pfdmanagement, nnef-eventexposure, nnef-afsessionwithqos <ul style="list-style-type: none"> <li>Nnef_EventExposure: Allows NF service consumers to subscribe to and modify application events and to notify NF service consumers about observed events on the NEF.</li> <li>Nnef_AFsessionWithQoS: Allows an AF to request the network to provide a specific Quality of service (QoS) for a session.</li> </ul> |
| NRF              | nnrf-disc, nnrf-nfm, nnrf-oauth2                                                                                                                                                                                                                                                                                                                                                                                     |
| NSSF             | nssf-nssaiavailability, nssf-nsselection                                                                                                                                                                                                                                                                                                                                                                             |
| NWDAF            | nnwdaf-analyticsinfo, nnwdaf-eventssubscription                                                                                                                                                                                                                                                                                                                                                                      |
| PCF              | npcf-am-policy-control, npcf-bdtpolicycontrol, npcf-eventexposure, npcf-policyauthorization, npcf-smpolicycontrol, npcf-ue-policy-control                                                                                                                                                                                                                                                                            |
| SEPP             | NA                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SMF              | nsmf-event-exposure, nsmf-pdusession                                                                                                                                                                                                                                                                                                                                                                                 |
| SMSF             | nsmsf-sms                                                                                                                                                                                                                                                                                                                                                                                                            |
| UDM              | nudm-ee, nudm-pp, nudm-sdm, nudm-ueau, nudm-uecm                                                                                                                                                                                                                                                                                                                                                                     |
| UDR              | nudr-dr, nudr-group-id-map                                                                                                                                                                                                                                                                                                                                                                                           |
| NA               | 5g-sbi-notification, nmediation-http, ocscp-sds, scpc-notification<br><b>Note:</b> Notifications from NRF to scpc-notification will be pegged with the service type as scpc-notification.                                                                                                                                                                                                                            |

# Supported 3GPP Headers

The following table lists the headers supported by SCP:

**Table 11-1 Supported 3GPP Custom Headers**

| Custom Header Name          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3gpp-Sbi-Message-Priority   | This header is used to specify the HTTP/2 message priority for 3GPP service based interfaces.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 3gpp-Sbi-Callback           | The header is used to identify a particular type of callback, for example, notification.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 3gpp-Sbi-Target-apiRoot     | <p>The header contains the apiRoot of the target URI in a message request sent to an SCP instance when using indirect communication such as Model C and Model D. SCP uses this header to indicate the apiRoot of the target URI if a new HTTP server is selected or reselected and if there is no location header in the message response. SCP adds this header to message responses when:</p> <ul style="list-style-type: none"> <li>3gpp-Sbi-Discovery-target-nf-set-id is present in the message request and producer selection is done by SCP.</li> <li>3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Discovery-target-NfSetid are present in the message request and SCP has done producer reselection.</li> <li>3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding are present in the message request and SCP has done producer reselection.</li> </ul> |
| 3gpp-Sbi-Routing-Binding    | This header is used in a service request to signal binding information to direct the service request to an HTTP server that has the targeted NF service resource context.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 3gpp-Sbi-Binding            | This header is used to signal binding information related to an NF service resource to a future consumer, such as an HTTP client, of that resource.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3gpp-Sbi-Discovery-*        | This header, which begins with the prefix 3gpp-Sbi-Discovery, is used in indirect communication mode for discovery and selection of a suitable producer by the SCP. Such headers can be included in any SBI message and include information allowing an SCP to find a suitable producer based on the consumer's included delegated discovery parameters.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 3gpp-Sbi-Oci                | This header is utilized by overloaded SCPs, SEPPs, consumer NFs, and producer NFs to transmit Overload Control Information (OCI) within message requests and responses to peers. The OCI includes attributes such as Overload Timestamp, Overload-Reduction-Metric, Period-of-Validity, and Scope within the 3gpp-Sbi-Oci header.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 3gpp-Sbi-Producer-Id        | <p>This header contains Instance ID of the producer NF. In case of producer selection or reselection (i.e. alternate routing) in indirect communication modes such as Model C or Model D, this header is used in a message response from SCP to the consumer NF to identify the producer NF.</p> <p>SCP adds this header to message responses when:</p> <ul style="list-style-type: none"> <li>3gpp-Sbi-Discovery-target-nf-set-id is present in the message request and producer selection is done by SCP.</li> <li>3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Discovery-target-NfSetid are present in the message request and SCP has done producer reselection.</li> <li>3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding are present in the message request and SCP has done producer reselection.</li> </ul>                                        |
| 3gpp-Sbi-Lci                | This header is used by a producer NF to send Load Control Information (LCI) to the consumer NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 3gpp-Sbi-Client-Credentials | This header is used by a consumer NF to send a Client Credential Assertion (CCA) to the NRF or to the producer NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

**Table 11-1 (Cont.) Supported 3GPP Custom Headers**

| Custom Header Name        | Description                                                                                                                                                                                                                                                                                                                           |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3gpp-Sbi-Target-Nf-Id     | This header is used in a 307 Temporary Redirect or 308 Permanent Redirect response to identify the target NF service instance towards which the request is redirected.                                                                                                                                                                |
| 3gpp-Sbi-Access-Scope     | This header is used in a service request for indirect communication to indicate the access scope of the service request for NF service access authorization.                                                                                                                                                                          |
| 3gpp-Sbi-Access-Token     | This header is used in a service response forwarded by the SCP to an NF service consumer to provide an access token for possible reuse in subsequent service requests.                                                                                                                                                                |
| 3gpp-Sbi-Correlation-Info | This header may be used to contain correlation information, for example, UE identity, that may be used by an operator in various offline network management, performance analysis and troubleshooting tools/applications to identify messages (requests, responses, subscriptions, notifications) related to a particular subscriber. |

SCP also supports the HTTP standard headers. For more information, see *3GPP TS 29.500 V16.10.0, Table 5.2.2.2-1*.

# A

## HTTP Status Codes and Applicability for Rerouting

This section describes the HTTP status codes usage on SBI. HTTP status codes are carried in the ":status" pseudo header field in HTTP/2, as defined in subclause 8.1.2.4 in IETF RFC 7540.

The following table specifies HTTP status codes per HTTP method that is supported on SBI. The support of the HTTP status code is:

- Mandatory, which is marked in table as "**M**". This signifies that all 3GPP NFs support the processing of the specific HTTP status code for the specific HTTP method, when received in a HTTP response message. In such cases, the 3GPP NF also supports the handling of the "ProblemDetails" JSON object with the Content-Type header field set to the value "application/problem+json" for HTTP status codes 4xx and 5xx if the corresponding API definition in the related technical specification does not specify another response body for the corresponding status code.
- Service specific, which is marked in table as "**SS**" and means that the requirement to process the HTTP status code depends on the definition of the specific API.
- Not applicable, which is marked in table as "**N/A**". This means that the specific HTTP status code shall not be used for the specific HTTP method within the 3GPP NFs.
- The Applicable for Rerouting column describes if the status code is applicable for rerouting at SCP. These status codes can be configured in routing options for each NF services.

NOTE 1: "200 OK" response used on SBI shall contain body.

NOTE 2: If the NF acting as an HTTP Client receives 2xx response code not appearing in table, the NF shall treat the received 2xx response: - as "204 No Content" if 2xx response does not contain body; and - as "200 OK" if 2xx response contains body.

### HTTP Status Code Supported on SBI

The following tables describe HTTP status codes supported on SBI:

- [Table A-1](#)
- [Table A-2](#)

**Table A-1 HTTP Status Codes Supported on SBI as Defined in 3GPP TS29.500**

| HTTP Status Code        | HTTP Method (DELETE) | HTTP Method (GET) | HTTP Method (PATCH) | HTTP Method (POST) | HTTP Method (PUT) | Applicable for Rerouting |
|-------------------------|----------------------|-------------------|---------------------|--------------------|-------------------|--------------------------|
| 100 Continue            | N/A                  | N/A               | N/A                 | N/A                | N/A               | No                       |
| 200 OK (NOTE 1)         | SS                   | M                 | SS                  | SS                 | SS                | No                       |
| 201 Created             | N/A                  | N/A               | N/A                 | SS                 | SS                | No                       |
| 202 Accepted            | SS                   | N/A               | SS                  | SS                 | SS                | No                       |
| 204 No Content (NOTE 2) | M                    | N/A               | SS                  | SS                 | SS                | No                       |
| 300 Multiple Choices    | N/A                  | N/A               | N/A                 | N/A                | N/A               | No                       |



**Table A-1 (Cont.) HTTP Status Codes Supported on SBI as Defined in 3GPP TS29.500**

| HTTP Status Code                                                               | HTTP Method (DELETE) | HTTP Method (GET) | HTTP Method (PATCH) | HTTP Method (POST) | HTTP Method (PUT) | Applicable for Rerouting |
|--------------------------------------------------------------------------------|----------------------|-------------------|---------------------|--------------------|-------------------|--------------------------|
| 303 See Other                                                                  | SS                   | SS                | N/A                 | SS                 | SS                | Yes                      |
| 307 Temporary Redirect<br>307 (Should be included as part of 3xx)              | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 308 Permanent Redirect<br>308 (Should be included as part of 3xx)              | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 400 Bad Request                                                                | M                    | M                 | M                   | M                  | M                 | Yes                      |
| 401 Unauthorized                                                               | M                    | M                 | M                   | M                  | M                 | Yes                      |
| 403 Forbidden                                                                  | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 404 Not Found                                                                  | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 405 Method Not Allowed                                                         | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 406 Not Acceptable                                                             | N/A                  | N/A               | N/A                 | N/A                | N/A               | Yes                      |
| 408 Request Timeout                                                            | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 409 Conflict<br>409 (should be included as part of "retriable-4xx" )           | N/A                  | N/A               | SS                  | SS                 | SS                | Yes                      |
| 410 Gone                                                                       | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 411 Length Required                                                            | N/A                  | N/A               | M                   | M                  | M                 | Yes                      |
| 412 Precondition Failed                                                        | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 413 Payload Too Large                                                          | N/A                  | N/A               | M                   | M                  | M                 | Yes                      |
| 414 URI Too Long                                                               | N/A                  | M                 | N/A                 | N/A                | N/A               | Yes                      |
| 415 Unsupported Media Type                                                     | N/A                  | N/A               | M                   | M                  | M                 | Yes                      |
| 429 Too Many Requests                                                          | N/A                  | N/A               | N/A                 | N/A                | N/A               | Yes                      |
| 500 Internal Server Error                                                      | M                    | M                 | M                   | M                  | M                 | Yes                      |
| 501 Not Implemented                                                            | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 502 Bad Gateway<br>502 (Should be included as part of gateway error and "5xx") | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |
| 503 Service Unavailable<br>503 (Should be included as part of "5xx")           | M                    | M                 | M                   | M                  | M                 | Yes                      |
| 504 Gateway Timeout<br>504 (Should be included as part of "5xx")               | SS                   | SS                | SS                  | SS                 | SS                | Yes                      |

**Table A-2 Additional Status Codes Applicable for Reroute Condition List (reRouteConditionList)**

| HTTP Status Code or Local Condition | Applicable for Rerouting |
|-------------------------------------|--------------------------|
| 301 Moved Permanently               | Yes                      |
| 302 Found                           | Yes                      |
| 304 Not Modified                    | Yes                      |
| 407 Proxy Authentication Required   | Yes                      |

**Table A-2 (Cont.) Additional Status Codes Applicable for Reroute Condition List (reRouteConditionList)**

| HTTP Status Code or Local Condition | Applicable for Rerouting |
|-------------------------------------|--------------------------|
| 416 Range Not Satisfiable           | Yes                      |
| 417 Expectation Failed              | Yes                      |
| 421 Misdirected Request             | Yes                      |
| 422 Unprocessable Entity            | Yes                      |
| 425 Too Early                       | Yes                      |
| 426 Upgrade Required                | Yes                      |
| 428 Precondition Required           | Yes                      |
| 431 Request Header Fields Too Large | Yes                      |
| 451 Unavailable For Legal Reasons   | Yes                      |
| 505 HTTP Version Not Supported      | Yes                      |
| 506 Variant Also Negotiates         | Yes                      |
| 507 Insufficient Storage            | Yes                      |
| 508 Loop Detected                   | Yes                      |
| 510 Not Extended                    | Yes                      |
| 511 Network Authentication Required | Yes                      |
| 5xx Server Errors                   | Yes                      |
| timeout                             | Yes                      |
| connectionError                     | Yes                      |

### NF as HTTP Client

Besides the HTTP Status Codes defined in the API specification, a NF as HTTP client should support handling of 1xx, 3xx, 4xx and 5xx HTTP Status Codes specified in above table, following the client behavior in corresponding IETF RFC where the received HTTP Status Code is defined.

When receiving a not recommended or not recognized 1xx, 3xx, 4xx or 5xx HTTP Status Code, a NF as HTTP client should treat it as x00 status code of the class, as described in clause 6 of IETF RFC 7231.

If 100, 200/204, 300, 400 or 500 response code is not defined by the API specification, the client may follow guidelines below:

- For 1xx (Informational):
  - Discard the response and wait for final response.
- For 2xx (Successful):
  - Consider the service operation is successful if no mandatory information is expected from the response payload in subsequent procedure.
  - If mandatory information is expected from response payload in subsequent procedure, parse the payload following description in subclause 6.2.1 of IETF RFC 7231 [11]. If parse is successful and mandatory information is extracted, continue with subsequent procedure.
  - Otherwise, consider service operation has failure and start failure handling.
- For 3xx (Redirection):
  - Retry the request towards the directed resource referred in the Location header, using same request method.

- For 4xx (Client Error):
  - Validate the request message and make correction before resending. Otherwise, stop process and go to error handling procedure.
- For 5xx (Server Error):
  - Stop process and go to error handling process.

### NF as HTTP Server

A NF acting as an HTTP server is able to generate HTTP status codes specified in above table per indicated HTTP method.

An HTTP method which is not supported by 5GC SBI API specification is rejected with the HTTP status code "501 Not Implemented".

NOTE 1: In this case, the NF does not need to include in the HTTP response the "cause" attribute indicating corresponding error since the HTTP status code "501 Not Implemented" itself provides enough information of the error, that is, the NF does not recognize the HTTP method.

If the specified target resource does not exist, the NF rejects the HTTP method with the HTTP status code "404 Not Found".

If the NF supports the HTTP method but not by a target resource, the NF rejects the HTTP method with the HTTP status code "405 Method Not Allowed" and includes in the response an Allow header field containing the supported method(s) for that resource.

NOTE 2: In this case, the NF does not need to include in the HTTP response the "cause" attribute indicating corresponding error since the HTTP status code "405 Method Not Allowed" itself provides enough information of the error and hence the Allow header field lists HTTP method(s) supported by the target resource.

If the received HTTP request contains incorrect optional IE, the NF discards the incorrect IE.

If the NF supports the HTTP method by a target resource but the NF cannot successfully fulfill the received request, the following requirements apply.

A NF as HTTP Server should map application errors to the most similar 3xx/4xx/5xx HTTP status code specified in table 5.2.7.1-1. If no such code is applicable, it should use "400 Bad Request" status code for errors caused by client side or "500 Server Internal Error" status code for errors caused on server side.

If the received HTTP request contains unsupported payload format, the NF rejects the HTTP request with the HTTP status code "415 Unsupported Media Type". If the HTTP PATCH method is rejected, the NF includes the Accept-Patch header field set to the value of supported patch document media types for a target resource i.e. to "application/merge-patch+json" if the NF supports "JSON Merge Patch" and to "application/json-patch+json" if the NF supports "JSON Patch". If the received HTTP PATCH request contains both "JSON Merge Patch" and "JSON Patch" documents and the NF supports only one of them, the NF ignores unsupported patch document.

NOTE 3: The format problem might be due to the request's indicated Content-Type or Content-Encoding header fields, or as a result of inspecting the payload body directly.

If the received HTTP request contains payload body larger than the NF is able to process, the NF rejects the HTTP request with the HTTP status code "413 Payload Too Large".

If the result of the received HTTP POST request used for a resource creation is equivalent to the existing resource, the NF rejects the HTTP request with the HTTP status code "303 See

Other" and includes in the HTTP response a Location header field set to the URI of the existing resource.

Protocol and application errors common to several 5GC SBI API specifications for which the NF includes in the HTTP response a payload body ("ProblemDetails" data structure or application specific error data structure) with the "cause" attribute indicating corresponding error are listed in below table.

**Table A-3 Protocol and Application Errors**

| Parameters                       | HTTP status code    | Description                                                                                                                                                                                                                                                                                                                         |
|----------------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INVALID_API                      | 400 Bad Request     | The HTTP request contains an unsupported API name or API version in the URI.                                                                                                                                                                                                                                                        |
| INVALID_MSG_FORMAT               | 400 Bad Request     | The HTTP request has an invalid format.                                                                                                                                                                                                                                                                                             |
| INVALID_QUERY_PARAM              | 400 Bad Request     | The HTTP request contains an unsupported query parameter in the URI.                                                                                                                                                                                                                                                                |
| MANDATORY_IE_INCORRECT           | 400 Bad Request     | A mandatory IE or conditional IE in data structure, but mandatory required, for an HTTP method was received with a semantically incorrect value. (NOTE 1)                                                                                                                                                                           |
| MANDATORY_IE_MISSING             | 400 Bad Request     | IE which is defined as mandatory or as conditional in data structure, but mandatory required, for an HTTP method is not included in the payload body of the request. (NOTE 1)                                                                                                                                                       |
| UNSPECIFIED_MSG_FAILURE          | 400 Bad Request     | The request is rejected due to unspecified client error. (NOTE 2)                                                                                                                                                                                                                                                                   |
| MODIFICATION_NOT_ALLOWED         | 403 Forbidden       | The request is rejected because the contained modification instructions attempt to modify IE which is not allowed to be modified.                                                                                                                                                                                                   |
| SUBSCRIPTION_NOT_FOUND           | 404 Not Found       | The request for modification or deletion of subscription is rejected because the subscription is not found in the NF.                                                                                                                                                                                                               |
| RESOURCE_URI_STRUCTURE_NOT_FOUND | 404 Not Found       | The request is rejected because a fixed part after the first variable part of an "apiSpecificResourceUriPart" (as defined in subclause 4.4.1 of 3GPP TS 29.501) is not found in the NF. This fixed part of the URI may represent a sub-resource collection (e.g. contexts, subscriptions, policies) or a custom operation. (NOTE 5) |
| INCORRECT_LENGTH                 | 411 Length Required | The request is rejected due to incorrect value of a Content-length header field.                                                                                                                                                                                                                                                    |

**Table A-3 (Cont.) Protocol and Application Errors**

| Parameters             | HTTP status code          | Description                                                                                                                          |
|------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| NF_CONGESTION_RISK     | 429 Too Many Requests     | The request is rejected due to excessive traffic which, if continued over time, may lead to (or may increase) an overload situation. |
| INSUFFICIENT_RESOURCES | 500 Internal Server Error | The request is rejected due to insufficient resources.                                                                               |
| UNSPECIFIED_NF_FAILURE | 500 Internal Server Error | The request is rejected due to unspecified reason at the NF. (NOTE 3)                                                                |
| SYSTEM_FAILURE         | 500 Internal Server Error | The request is rejected due to generic error condition in the NF.                                                                    |
| NF_CONGESTION          | 503 Service Unavailable   | The NF experiences congestion and performs overload control, which does not allow the request to be processed. (NOTE 4)              |

NOTE 1: "invalidParams" attribute is included in the "ProblemDetails" data structure indicating missing or incorrect IE.

NOTE 2: This application error indicates error in the HTTP request and there is no other application error value that can be used instead.

NOTE 3: This application error indicates error condition in the NF and there is no other application error value that can be used instead.

NOTE 4: If the reason for rejection is a temporary overload, the NF may include in the response a Retry-After header field to indicate how long the service is expected to be unavailable.

NOTE 5: If the request is rejected because of an error in the URI before the first variable part of "apiSpecificResourceUriPart", then the "404 Not Found" HTTP status code may be sent without the "ProblemDetails" data structure indicating protocol or application error.

# B

## Error Codes Generated by SCP

The following table describes HTTP error codes generated by SCP:

### Note

In the following table, consumer NF refers to the client, and producer NF refers to the server.

**Table B-1 SCP Generated Error Codes**

| HTTP Status Code | Protocol or Application Error | Sample Error Scenarios at SCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 400 Bad Request  | NF_DISCOVERY_FAILURE          | Indicates that an empty list of NF profiles is received in the delegated NF discovery response.                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 400 Bad Request  | UNSPECIFIED_MSG_FAILURE       | <ul style="list-style-type: none"> <li>Indicates that the message could not be routed due to the unavailability of routing destinations for the incoming Inter-PLMN request after Delegated NF Discovery.</li> <li>Indicates that the message could not be routed due to the unavailability of routing destinations for the incoming InterPLmn request with the received 3gpp-sbi-target-apiroot header.</li> <li>Indicates that the message could not be routed because the eligible producer NF was filtered out for OCI.</li> </ul> |
| 400 Bad Request  | INVALID_ACCESS_TOKEN          | Indicates that the message could not be routed due to an invalid OAuth2 access token.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 400 Bad Request  | ACCESS_TOKEN_NOT_RECEIVED     | Indicates that the request could not be routed because OAuth2 access token was not received from consumer NF.                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 400 Bad Request  | MISSING_ACCESS_TOKEN_INFO     | Indicates that the message could not be routed because the discovery headers, required to obtain the OAuth2 access token, are missing from the received request.                                                                                                                                                                                                                                                                                                                                                                       |
| 400 Bad Request  | MANDATORY_QUERY_PARAM_MISSING | Indicates that the received SBI request does not contain all mandatory discovery headers required for Delegated NF Discovery.                                                                                                                                                                                                                                                                                                                                                                                                          |
| 400 Bad Request  | MANDATORY_IE_INCORRECT        | <ul style="list-style-type: none"> <li>Indicates that the SBI request received has a malformed 3gpp-sbi-routing-binding header.</li> <li>Indicates that the received SBI request has imperfectly formed target PLMN.</li> <li>Indicates that the received SBI request has a malformed default notification request.</li> <li>Indicates that the message could not be routed due to an invalid host value received in the 3gpp-sbi-target-apiroot header.</li> </ul>                                                                    |
| 400 Bad Request  | MANDATORY_IE_MISSING          | Indicates that the message could not be routed due to the absence of expected headers required to select a producer NF for routing.                                                                                                                                                                                                                                                                                                                                                                                                    |
| 400 Bad Request  | INVALID_API                   | Indicates that the message could not be routed due to the presence of an API version in the incoming SBI request that is not supported by the producer NF, as per the learned NF profile available at SCP.                                                                                                                                                                                                                                                                                                                             |
| 403 Forbidden    | ACCESS_TOKEN_DENIED           | Indicates that the message could not be routed due to OAuth2 access token being denied.                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Table B-1 (Cont.) SCP Generated Error Codes

| HTTP Status Code                    | Protocol or Application Error | Sample Error Scenarios at SCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 403 Forbidden                       | CCA_VERIFICATION_FAILURE      | Indicates that the received CCA header failed validation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 404 Not Found                       | -                             | Indicates that the message could not be routed due to the absence of a learnt producer NF for the received 3gpp-sbi-routing-binding header and the absence of the 3gpp-sbi-target-apiroot header.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 429 Too Many Requests               | NF_CONGESTION_RISK            | <p>This error code is sent in any of the following conditions:</p> <ul style="list-style-type: none"> <li>The message could not be routed due to pod overload.</li> <li>The message could not be routed because the ingress rate was more than the allowed rate configured for the consumer NF as specified by the rules configured in the Ingress Rate Limiter REST API.</li> <li>The message could not be routed because the egress rate was more than the allowed rate configured for the producer NF as specified by the rules configured in the Egress Rate Limiter REST API.</li> </ul>                                                                                                                                                                                |
| 431 Request Header Fields Too Large | -                             | For HTTP/2, SCP sends 431 responses with no details when the header size is greater than 8 KB.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 500 Internal Server Error           | -                             | <ul style="list-style-type: none"> <li>Indicates that an error response was received by the SCP-Worker client from the Mediation service.</li> <li>When the response is greater than the configured value of <code>maxPayloadSizeInKb</code> in the <code>ocscp_values.yaml</code> file. For example, if <code>maxPayloadSizeInKb</code> value is set to 512, error 500 is received when the response size exceeds 512 Kb.</li> <li>Indicates that the current object pool is exhausted and no <code>streamInfo</code> objects are available.</li> <li>Indicates that a request is received with an incorrect value of a Content-Length header field.</li> <li>Indicates that a request payload size (Content-Length) has exceeded the allowed threshold (256KB).</li> </ul> |

Table B-1 (Cont.) SCP Generated Error Codes

| HTTP Status Code          | Protocol or Application Error | Sample Error Scenarios at SCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 500 Internal Server Error | UNSPECIFIED_NF_FAILURE        | <ul style="list-style-type: none"> <li>Indicates that a decode failure occurred when processing the response received from the mediation.</li> <li>Indicates that the message could not be routed because the access token request from the SCP-worker to the SCP-NrfProxy-Oauth service timed out.</li> <li>Indicates that the message could not be routed because the access token request from the SCP-worker to the SCP-NrfProxy-Oauth service encountered a transport error.</li> <li>Indicates that the message could not be routed because the access token request from SCP-worker to SCP-NrfProxy-Oauth encountered an exception other than TimeoutException, ConnectException, or UnknownHostException.</li> <li>Indicates that the message could not be routed because the access token request from SCP-Worker to SCP-NrfProxy-Oauth failed due to decoding exception in the access token error response body to the ProblemDetails instance.</li> <li>Indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to an exception other than TimeoutException, ConnectException, or UnknownHostException.</li> <li>Indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to decoding exception in the delegated NF discovery error response body to the ProblemDetails instance.</li> <li>Indicates that the message could not be routed due to downstream task queue being full.</li> <li>Indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to TimeoutException.</li> <li>Indicates that the delegated discovery request from the SCP-worker to the SCP-NrfProxy service failed due to a WebClientRequestException.</li> <li>Indicates that message could not be routed due to an exception caused failure of downstream asynchronous call.</li> <li>Indicates that the message could not be routed due to an exception encountered on the request processing path.</li> <li>Indicates that the message could not be routed due to an exception encountered during SBI message processing.</li> <li>Indicates that the message could not be routed due to an exception encountered on the response processing path.</li> </ul> |
| 500 Internal Server Error | UNKNOWN_STATUS_CODE           | Indicates that SCP has received a nonstandard HTTP status code from a producer NF.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 500 Internal Server Error | NF_SERVICE_FAILURE            | <ul style="list-style-type: none"> <li>SCP sends this error by default when OCI is enabled, the selected producer NF is overloaded, and no alternate is available.</li> <li>Indicates that the message could not be routed because the selected producer NF is congested and there is no other eligible producer NF available for routing.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 504 Gateway Timeout       | TIMED_OUT_REQUEST             | <ul style="list-style-type: none"> <li>Indicates that the message could not be routed due to a response timeout at SCP, based on the 3GPP-sbi-max-rsp-time header.</li> <li>Indicates that the message could not be routed because a TimeoutException was encountered at the Worker Client while reaching the upstream producer NF.</li> <li>Indicates that the message could not be routed because the total transaction timeout for the service was reached.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |



Table B-1 (Cont.) SCP Generated Error Codes

| HTTP Status Code    | Protocol or Application Error | Sample Error Scenarios at SCP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 504 Gateway Timeout | TARGET_NF_NOT_REACHABLE       | <ul style="list-style-type: none"> <li>• Unable to connect to the producer NF, and alternate routing is disabled (service unavailable). <ul style="list-style-type: none"> <li>– Indicates that the message could not be routed because WebClientRequestException was encountered at the Worker Client while reaching upstream the producer NF.</li> <li>– Indicates that the message could not be routed due to an exception other than WebClientResponseException, WebClientRequestException, or TimeoutException encountered at the Worker Client while reaching upstream the producer NF.</li> </ul> </li> <li>• HTTP2 stream resets on the upstream connection (upstream connect error or disconnect).</li> <li>• DNS resolution failure for producer NF FQDN.</li> <li>• Indicates that the message could not be routed due to an error response received from the platform service mesh.</li> <li>• Indicates that the message could not be routed because eligible producer NFs were proactively filtered due to circuit breaking, outlier detection, egress rate limiting, and so on.</li> </ul> |
| 508 Loop Detected   | -                             | Indicates that the message could not be routed due to the presence of the SCP's self FQDN in the incoming SBI request's <b>Via</b> header. It also suggests that required headers or information, such as target-apiproxy, binding headers, discovery headers, or any other necessary routing information, are missing from the request header.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |