

Oracle® Communications

Cloud Native Core, Service Communication Proxy User Guide



Release 26.1.201
G59078-01
July 2026

ORACLE®

Copyright © 2019, 2026, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface

Documentation Accessibility	i
Diversity and Inclusion	i
Conventions	i

1 Introduction

1.1 References	3

2 Service Communication Proxy Architecture

2.1 5G SBI Message Processing and Trigger Points	3

3 Service Communication Proxy Features

3.1 Runtime Update for SCP Profile Parameters	6
3.2 Support for Subscriber ID to Group ID Resolution	9
3.3 Routing Options Enhancements	12
3.3.1 Support for Default Notification Message Routing	12
3.3.1.1 Default Notification Routing Behavior at SCP	12
3.3.2 Support for Sender NF Type based Routing Option Selection	45
3.3.3 Routing Options Enhancement to Control SCP Routing Features	49
3.3.3.1 Alternate Routing Configuration Based on Received Status Code 504, Expired Response Timeout and Connection Error	50
3.3.4 Routing Options Enhancements for Next Hop SCP and Notification or Callback Messages	51
3.4 Support for 3GPP Defined NFs, Custom NFs, and Custom NF Services	54
3.5 Traffic Segregation	70
3.6 TLS 1.3 Support for Kubernetes API	73
3.7 Disabling mTLS to Establish Communication between SCP and cnDBTier	73
3.8 TLS Support for SCP to cnDBTier Traffic	75
3.9 LCM Automation	77
3.10 Error Response Enhancement	79
3.10.1 SCP Error IDs	82

3.11	Log Enhancement for 5G SBI Error Responses Generated by SCP	94
3.12	NFProfile Processing Enhancements	98
3.13	Support for cnDBTier APIs on the CNC Console	100
3.14	NRF Configuration Using DNS SRV Resolution	102
3.15	Support for Kubernetes Resources	104
3.15.1	Support for Dual Stack	105
3.15.2	Network Policies	111
3.15.3	Pod Disruption Budget	111
3.15.4	SCP Microservices and Probes	112
3.15.5	Horizontal Pod Autoscaler	120
3.16	SCP Response Timeout Extension	121
3.17	Overload Control Based on the Overload Control Information Header	123
3.18	Support for HTTPS	126
3.18.1	TLS Certificate Configuration Enhancement	128
3.18.2	Support for TLS	129
3.18.3	Support for Automated Certificate Lifecycle Management	134
3.19	Support for HTTP2 Header	134
3.19.1	Support for 3GPP Timestamp Related Headers	134
3.19.2	Support for Multiple 3gpp-Sbi-Binding Headers	138
3.19.3	Support for 3gpp-Sbi-Custom-UDR-Nf-Group-Id	139
3.20	Enhanced NF Status Processing	139
3.21	Location Header for Host Mismatch	141
3.22	Support for the Client Credentials Assertion Header	142
3.23	Support for 5G SBI Message Correlation using the 3gpp-Sbi-Correlation-Info Header	143
3.24	SCP Health Check API	144
3.25	Verbose Logging for SCP	147
3.26	Support for OAuth2.0	176
3.27	Pod Overload Control	180
3.28	Host Preference for Egress Message Requests	181
3.29	Enhanced 5G SBI Message Failure Handling	183
3.30	Extension of HTTP Status Code List for Rerouting	196
3.31	Load Balancing	197
3.32	5G SBI Message Mediation Support	198
3.32.1	Mediation Rules Configuration	201
3.32.1.1	Mediation Rule Migration Process	211
3.32.2	Mediation Log Level Configuration	216
3.32.3	Mediation Support for User Defined Variables in Rules and Trigger Points	217
3.33	5G SBI Message Routing	219
3.33.1	5G SBI Notification Requests Processing	222
3.33.1.1	Enhanced Notifications Handling	227
3.33.2	5G SBI Service Requests Processing	229
3.34	Message Priority Assignment and Override	232

3.35	Outlier Detection	233
3.35.1	Next Hop SCP Outlier Detection	234
3.36	Circuit Breaking	236
3.37	Canary Release	237
3.38	Static Configuration of NF Profiles	238
3.39	Preventive Audit on Last NF Instance	239
3.40	Rate Limiting	240
3.40.1	Local Rate Limit Feature	240
3.40.2	Global Rate Limit Feature	241
3.40.3	Ingress Rate Limiting	243
3.40.4	Egress Rate Limiting	246
3.40.4.1	Global Egress Rate Limiting	247
3.40.5	Egress and Ingress Key Combinations	250
3.41	Support for Multus Container Network Interface	251
3.42	Support for Model C Indirect 5G SBI Communication	252
3.43	Multiple SCP Deployment in the Same Kubernetes Cluster	255
3.44	Support for SCP Triplet Deployment	255
3.45	Alternate Routing based on the DNS SRV Records	256
3.46	Support for Multiple Signaling Service IPs	259
3.47	Egress Congestion Control Support at SCP	260
3.48	Support for Model D Indirect 5G SBI Communication with Delegated Discovery	261
3.48.1	Managing Delegated Discovery Response Caching Based on Discovery Query Parameters	264
3.48.2	NF Discovery Response Cache Update Based on the Received Notifications	265
3.49	NF Discovery Enhancements	269
3.50	NF Selection Enhancements	280
3.51	Topology Source Information Enhancements	283
3.52	5G SBI Roaming	285
3.52.1	SEPP Support for 5G SBI Roaming	285
3.52.2	Support for Custom Roaming Proxy	288
3.53	Support for Alternate Routing Using Static Configuration	301
3.54	Support for Thread Watchdog	302
3.55	Message Feed Enhancements	302
3.56	Observability Enhancements for SCP Inter-microservice Connectivity	307
3.57	Load Control based on the Load Control Information Header	307
3.58	SCP Capacity Enhancements	308
3.59	Support for Three-site Georedundancy	310
3.60	Automated Test Suite Support	311

4 Configuring Service Communication Proxy using the CNC Console

4.1	Support for Multicluster Deployment	1

4.2	CNC Console Interface	1
4.2.1	Configuring SCP Features	3
4.2.1.1	Configuring the Log Enhancement Feature	4
4.2.1.2	Configuring Error Response Enhancement	6
4.2.1.3	Configuring Enhanced NF Status Processing	6
4.2.1.4	Configuring Global Egress Rate Limiting	7
4.2.1.5	Configuring Support for 5G SBI Roaming	8
4.2.1.6	Configuring Mediation	9
4.2.1.7	Configuring Model D Indirect 5G SBI Communication feature	10
4.2.1.8	Configuring SCP User Agent Info	12
4.2.1.9	Configuring Message Feed	12
4.2.1.10	Configuring Load Control Information (LCI)	13
4.2.1.11	Configuring Host Preference for Egress Message Requests	14
4.2.1.12	Configuring CCA Header Validation	16
4.2.1.13	Configuring Location Header Update for Host Mismatch	18
4.2.1.14	Configuring Support for OAuth2.0	18
4.2.1.15	Configuring SCP Health Check API	20
4.2.1.16	NRF Configuration using DNS SRV Resolution	22
4.2.1.17	Configuring Overload Control Based on the Overload Control Information Header	23
4.2.1.18	Configuring Enhanced NFProfile Processing	26
4.2.1.19	Configuring 3GPP Timestamp Headers Support	26
4.2.1.20	Configuring Enhanced Notifications Handling	28
4.2.1.21	Configuring Ingress Rate Limiting	29
4.2.1.22	Configuring Egress Rate Limiting	29
4.2.1.23	Configuring NF Discovery Enhancement	30
4.2.1.24	Configuring NF Selection Enhancements	30
4.2.1.25	Configuring SubscriberId to NF GroupId Resolution	30
4.2.2	Configuring OCI	31
4.2.3	Configuring OCI Threshold Levels	32
4.2.4	Viewing cnDBTier APIs on the CNC Console	33
4.2.4.1	Backup List	33
4.2.4.2	cnDBTier Backup Status	33
4.2.4.3	cnDBTier Version	34
4.2.4.4	Database Statistics Report	34
4.2.4.5	Georeplication Recovery	35
4.2.4.6	Georeplication Status	37
4.2.4.7	Viewing cnDBTier Replication Status	38
4.2.4.8	Replication HeartBeat Status	38
4.2.4.9	Local Cluster Status	39
4.2.4.10	On Demand Backup	39
4.2.4.11	cnDBTier Health	40

4.2.5	Configuring NRF SRV	42
4.2.5.1	Mapping NfInstanceId and ServiceInstanceId	44
4.2.6	Configuring NRF	45
4.2.7	Configuring Upgrade and Rollback Event	46
4.2.8	OAuth2.0 Configurations	46
4.2.8.1	Configuring Access Token Granularity	46
4.2.8.2	Configuring OAuth2.0 Local PLMN Required	48
4.2.9	Configuring Error Profile	49
4.2.10	Configuring Canary Release	50
4.2.11	Configuring Global Options	52
4.2.12	Mediation Configuration	57
4.2.12.1	Configuring Mediation Trigger Point	57
4.2.12.2	Configuring Routing Options for Mediation	60
4.2.12.3	Configuring Mediation Rules	61
4.2.12.4	Configuring Mediation Log Levels	64
4.2.12.5	Configuring Mediation Support for User Defined Variables	65
4.2.13	Configuring NF Profile	67
4.2.14	Configuring SCP Profile	68
4.2.15	Configuring Topology Source Info	69
4.2.16	Configuring NF Selection Mode Configuration	70
4.2.17	Fetching Routing Rules	71
4.2.18	Configuring Ingress Rate Limiting	73
4.2.19	Configuring Egress Rate Limiting	73
4.2.20	Configuring Server Header	74
4.2.21	Configuring Pod Overload Control Policies	75
4.2.22	Configuring SBI Message Priority	76
4.2.23	Configuring DNS SRV based Alternate Routing	77
4.2.23.1	Configuring Routing Modes	78
4.2.23.2	Configuring the Default TTL Value	78
4.2.23.3	Configuring Alternate NF Group	79
4.2.23.4	Configuring Refresh DNS SRV Data	80
4.2.24	Configuring SBI Message Priority and Error Profiles for Egress Congestion Control	81
4.2.25	Configuring the nextHopSCP Routing Option	82
4.2.26	Configuring SEPP Inter PLMN Routing	84
4.2.27	Configuring Route Groups	86
4.2.28	Configuring Ingress Rate Limiter Consumer Info	87
4.2.29	Configuring SCP Services	89
4.2.30	Configuring Outlier Detection	92
4.2.31	Configuring Traffic Feed	93
4.2.32	Congestion Control Configurations	93
4.2.33	Configuring Routing Options	95

4.2.34	Configuring Routing Config Set	99
4.2.35	Configuring NFTypes-NFServices	100
4.2.36	Configuring NF Service Feature Config	101
4.2.37	Configuring NF Service Config Set	102
4.2.38	Configuring Next Hop Proxy and Roaming Proxy NF Service Config	104
4.2.39	Circuit Breaking Configurations	105
4.2.40	Viewing SCP Feature Status	106
4.2.41	Get NF Discovery Response Cache Configuration Data	107
4.2.42	Configuring NF Profile Level Attribute	108
4.2.43	Configuring NF Profile Level Attribute Configuration Data	109
4.2.44	Configuring NF Delegated Discovery Response Cache	110
4.2.45	Configuring Roaming Proxy and Proxy Selection Routing Mode	113
4.2.46	Configuring IE Registry	118
4.2.47	Configuring NF Topology Audit	120
4.2.48	Configuring Exception Config Set	121
4.2.49	Configuring NF Group ID Retrieval	122

5 Metrics

5.1	SCP OCI Metrics Dashboard	1
5.2	Dimension Description	1
5.2.1	Metrics	15
5.2.2	Mediation Metrics	148

6 Alerts

6.1	Configuring Alerts	2
6.2	System level alerts	2
6.2.1	SCPNotificationPodMemoryUsage	2
6.2.2	SCPWorkerPodMemoryUsage	3
6.2.3	SCPInstanceDown	4
6.3	Application level alerts	5
6.3.1	SCPCcaFeatureEnabledWithoutHttps	5
6.3.2	SCPIngressTrafficRateAboveMinorThreshold	6
6.3.3	SCPIngressTrafficRateAboveMajorThreshold	7
6.3.4	SCPIngressTrafficRateAboveCriticalThreshold	8
6.3.5	SCPRoutingFailedForProducer	9
6.3.6	SCPAuditErrorResponse	10
6.3.7	SCPAuditEmptyNFArrayResponse	10
6.3.8	DuplicateLocalityFoundInForeignNF	11
6.3.9	ForeignNFLocalityNotServed	12
6.3.10	UnknownLocalityFoundInForeignNF	13

6.3.11	SCPUpsstreamResponseTimeout	13
6.3.12	SCPSingleNflInstanceAvailableForNFType	14
6.3.13	SCPNoNflInstanceForNFType	15
6.3.14	SCPIngressTrafficRateExceededConfiguredLimit	16
6.3.15	SCPIngressTrafficRoutedWithoutRateLimitTreatment	16
6.3.16	SCPEgressTrafficRateExceededConfiguredLimit	17
6.3.17	SCPEgressTrafficRoutedWithoutRateLimitTreatment	18
6.3.18	SCPNotificationRejectTopologySourceLocal	19
6.3.19	SCPNotificationProcessingFailureForNF	19
6.3.20	SCPSubscriptionFailureForNFType	21
6.3.21	SCPReSubscriptionFailureForNFType	23
6.3.22	SCPNrRegistrationFailureForRegionOrSetId	23
6.3.23	SCPNrHeartbeatFailureForRegionOrSetId	25
6.3.24	SCPDOperationFailure	25
6.3.25	SCPGeneratedErrorsResponseForNFService	26
6.3.26	SCPCircuitBreakingAppliedForNF	26
6.3.27	SCPUpsgradeStarted	27
6.3.28	SCPUpsgradeFailed	27
6.3.29	SCPUpsgradeSuccessful	28
6.3.30	SCPRollbackStarted	28
6.3.31	SCPRollbackFailed	29
6.3.32	SCPRollbackSuccessful	29
6.3.33	ScpWorkerPodCpuUtilizationAboveWarnThreshold	30
6.3.34	ScpWorkerPodCpuUtilizationAboveMinorThreshold	31
6.3.35	ScpWorkerPodCpuUtilizationAboveMajorThreshold	31
6.3.36	ScpWorkerPodCpuUtilizationAboveCriticalThreshold	32
6.3.37	SCPUnhealthyPeerSCPDetected	33
6.3.38	SCPDnsSrvQueryFailure	33
6.3.39	SCPProducerOverloadThrottled	34
6.3.40	SCPProducerOverloadAlternateRouted	35
6.3.41	SCPSeppNotConfigured	35
6.3.42	SCPSeppRoutingFailed	36
6.3.43	SCPGlobalEgressRLRemoteParticipantConnectivityFailure	37
6.3.44	SCPGlobalEgressRLRemoteParticipantWithDuplicateNFInstanceId	38
6.3.45	SCPMediationConnectivityFailure	39
6.3.46	SCPNotificationQueuesUtilizationAboveMinorThreshold	40
6.3.47	SCPNotificationQueuesUtilizationAboveMajorThreshold	41
6.3.48	SCPNotificationQueuesUtilizationAboveCriticalThreshold	42
6.3.49	SCPNrProxyQueuesUtilizationAboveMinorThreshold	42
6.3.50	SCPNrProxyQueuesUtilizationAboveMajorThreshold	43
6.3.51	SCPNrProxyQueuesUtilizationAboveCriticalThreshold	44
6.3.52	SCPWorkerQueuesUtilizationAboveMinorThreshold	44

6.3.53	SCPWorkerQueuesUtilizationAboveMajorThreshold	45
6.3.54	SCPWorkerQueuesUtilizationAboveCriticalThreshold	46
6.3.55	SCPCacheQueuesUtilizationAboveMinorThreshold	46
6.3.56	SCPCacheQueuesUtilizationAboveMajorThreshold	47
6.3.57	SCPCacheQueuesUtilizationAboveCriticalThreshold	48
6.3.58	SCPLoadManagerQueuesUtilizationAboveMinorThreshold	48
6.3.59	SCPLoadManagerQueuesUtilizationAboveMajorThreshold	49
6.3.60	SCPLoadManagerQueuesUtilizationAboveCriticalThreshold	50
6.3.61	SCPProducerNfSetUnhealthy	50
6.3.62	SCPPeerSeppUnhealthy	51
6.3.63	SCPMicroServiceUnreachable	52
6.3.64	SCPTrafficFeedSendFailed	53
6.3.65	SCPTrafficFeedKafkaClusterUnhealthy	53
6.3.66	SCPTrafficFeedPartitionUnhealthy	54
6.3.67	SCPServiceMeshFailure	54
6.3.68	SCPHealthCheckFailedForPeerSCP	55
6.3.69	SCPHealthCheckFailed	55
6.3.70	ScpWorkerPodPendingTransUtilizationAboveWarnThreshold	56
6.3.71	ScpWorkerPodPendingTransUtilizationAboveMinorThreshold	56
6.3.72	ScpWorkerPodPendingTransUtilizationAboveMajorThreshold	57
6.3.73	ScpWorkerPodPendingTransUtilizationAboveCriticalThreshold	58
6.3.74	ScpWorkerPodResourceUtilizationAboveMinorThreshold	58
6.3.75	ScpWorkerPodResourceUtilizationAboveMajorThreshold	59
6.3.76	ScpWorkerPodResourceUtilizationAboveWarnThreshold	59
6.3.77	ScpWorkerPodResourceUtilizationAboveCriticalThreshold	60
6.3.78	SCPDNSSRVNRFMigrationTaskFailure	61
6.3.79	SCPDNSSRVNRFNonMigrationTaskFailure	61
6.3.80	SCPDNSSRVNRFDuplicateTargetDetected	62
6.3.81	SCPHighResponseTimeFromProducer	62
6.3.82	SCPCGroupVersionDetectionFailed	63
6.3.83	SCPCPUUsageFileReadFailed	63
6.3.84	SCPIgnoreUnknownService	64
6.3.85	SCPWorkerSSLCertificateOnCriticalExpiry	64
6.3.86	SCPWorkerSSLCertificateOnMajorExpiry	65
6.3.87	SCPWorkerSSLCertificateOnMinorExpiry	65
6.3.88	SCPIngressConnectionEstablishmentFailure	66
6.3.89	SCPEgressConnectionEstablishmentFailure	66
6.3.90	SCPNrfProxyOAuthQueuesUtilizationAboveMinorThreshold	67
6.3.91	SCPNrfProxyOAuthQueuesUtilizationAboveMajorThreshold	67
6.3.92	SCPNrfProxyOAuthQueuesUtilizationAboveCriticalThreshold	68
6.3.93	ScpSelfOCIThresholdAboveWarn	68
6.3.94	ScpSelfOCIThresholdAboveMinor	69

6.3.95	ScpSelfOCIThresholdAboveMajor	69
6.3.96	ScpSelfOCIThresholdAboveCritical	70
6.3.97	SCPWorkerSSLPartialSecret	70
6.3.98	SCPWorkerAndNFTimeSyncFailure	71
6.3.99	SCPCoherenceCacheHitsRateAboveThreshold	72
6.3.100	SCPNotificationRequestsRateAboveThreshold	72
6.3.101	SCPLciRxRateAboveThreshold	73
6.3.102	SCPOciRxRateAboveThreshold	73
6.3.103	SCPTrafficRateAboveRatedThreshold	74
6.3.104	SCPMaxNFProfilesLimitExceeded	74
6.3.105	SCPCustomRoamingProxyRoutingNotFound	75
6.3.106	SCPPeerCustomRoamingProxyUnhealthy	75
6.3.107	SCPCustomRoamingProxyMaxViaHeaderProcessingCountExceeded	76
6.3.108	SCPCustomRoamingProxyRoutingFailed	77
6.3.109	SCPWorkerNFSelectionHeaderMatchListDuplicates	77
6.3.110	ScpWorkerServiceRequestRoutingInfoAbsent	78
6.3.111	ScpWorkerNotificationRequestRoutingInfoAbsent	78
6.3.112	SCPWorkerNFProfileSyncFailure	79
6.3.113	SCPnfTopologyForceRefreshAuditFailure	79
6.3.114	SCPnfGroupIdDiscoveryFailure	80
6.3.115	SCPAuditDurationExceeded	81
6.3.116	SCPSelfProfileUpdateSuccess	82
6.3.117	SCPEgressRateLimitActiveKeyCountAboveCriticalThreshold	82
6.3.118	SCPEgressRateLimitActiveKeyCountAboveMajorThreshold	83
6.3.119	SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold	84
6.3.120	SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold	85
6.3.121	SCPIngressRateLimitActiveKeyCountAboveMajorThreshold	86
6.3.122	SCPIngressRateLimitActiveKeyCountAboveCriticalThreshold	87
6.3.123	SCPGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold	88
6.3.124	SCPGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold	89
6.4	Mediation Alerts	90
6.4.1	NFMediationUserDefinedVariablesMaxSizeLimitExceeded	90

7 KPIs and Traces

7.1	Key Performance Indicators	1
7.1.1	Platform KPIs	1
7.1.2	Application KPIs	3
7.1.3	Feature KPIs	5
7.2	Traces	10

8 SCP Interactions with NRF

9 Supported Query Parameters

10 Natively Supported NF Types and Services

11 Supported Headers

A HTTP Status Codes and Applicability for Rerouting

B Error Codes Generated by SCP

Preface

- [Documentation Accessibility](#)
- [Diversity and Inclusion](#)

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which user supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that user enter.

My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs.

Use My Oracle Support to access support resources, create and manage Service Requests (SRs), and get assistance with product issues.

For help with My Oracle Support registration, Service Request creation, or other support access questions, use the available support options in My Oracle Support, including MOSFS and MOS Chat.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

Acronyms

The following table provides information about the acronyms and the terminology used in the document.

Table 1 Acronyms

Acronym	Description
0-RTT	Zero Round Trip Time
3GPP	3rd Generation Partnership Project
5GC	5G Core Network
5GS	5G System
AEAD	Authenticated Encryption with Associated Data
AF	Application Function
API	Application Programming Interface
AUSF	Authentication Server Function
CCA	Client Credentials Assertion, 3gpp-Sbi-Client-Credentials header is defined by 3GPP. The header contains a client credentials assertion.
CNC Console	Oracle Communications Cloud Native Configuration Console
CNE	Oracle Communications Cloud Native Core, Cloud Native Environment
CNI	Container Network Interface
CNLB	Cloud Native Load Balancer
CRD	Custom Resource Definition
DNS	Domain Name System
FQDN	Fully Qualified Domain Name
GPSI	Generic Public Subscription Identifier
HPLMN	Home Public Land Mobile Network
HR	Home Routing
HTTP	Hypertext Transfer Protocol
HTTPS	Hypertext Transfer Protocol Secure
IE	Information Element
IMSI	International Mobile Subscriber Identity
IWF	InterWorking and Mediation Function
K8s	Kubernetes
LBO	Local Breakout
LBVM	Load Balancer Virtual Machine
LC-H	Load Control based on LCI Header
LCI	Load Control Information
LCM	Lifecycle Management
MAC	Message Authentication Code
MCC	Mobile Country Code
MNC	Mobile Network Code
MSISDN	Mobile Station International Subscriber Directory Number
NAD	Network Attachment Definition

Table 1 (Cont.) Acronyms

Acronym	Description
NF	Network Function
NRF	Oracle Communications Cloud Native Core, Network Repository Function
NTP	Network Time Protocol
OAM	Operations, Administration, and Maintenance
OCCM	Oracle Communications Cloud Native Core, Certificate Management
OCI	Oracle Cloud Infrastructure
OCI	Overload Control Information
OCNADD	Oracle Communications Network Analytics Data Director
OLC-H	Overload Control based on OCI Header
PFS	Provide Forward Secrecy
PLMN	Public Land Mobile Network
PSK	Pre-Shared Keys
QoS	Quality of Service
RTT	Round Trip Time
SASL	Simple Authentication and Security Layer
SBA	Service Based Architecture
SBI	Service Based Interface
SCP	Oracle Communications Cloud Native Core, Service Communication Proxy
SCPC	Service Communication Proxy Control
SEPP	Oracle Communications Cloud Native Core, Security Edge Protection Proxy
SMF	Session Management Function
SNAT	Source Network Address Translation
SPN	Service Proto Name
SRV	Service
SSL	Secure Sockets Layer
SUPI	Subscription Permanent Identifier
TLS	Transport Layer Security
UDM	Unified Data Management
UDR	Oracle Communications Cloud Native Core, Unified Data Repository
UDSF	Unstructured Data Storage Function
UDV	User Defined Variables
URI	Uniform Resource Identifier
VPLMN	Visited Public Land Mobile Network
XFCC	x-forwarded-client-cert is a proxy header that indicates TLS certificate information.

What's New in This Guide

This section introduces the documentation updates for release 26.1.2xx.

Release 26.1.201 - G59078-01, July 2026

Feature Updates

- New Features:
 - Updated the following sections for the Runtime Update for SCP Profile Parameters feature:
 - * Added the [Runtime Update for SCP Profile Parameters](#) section to explain how SCP updates some of its Helm parameters at runtime.
 - * Added the following sections for the CNC Console configuration:
 - * [Configuring NF Profile](#): To configure self SCP profiles.
 - * [Configuring Global Options](#): To configure service state of SCP.
 - * Added the `ocscp_self_profile_update_success_total` metric in the [Metrics](#) section.
 - * Added the [SCPSelfProfileUpdateSuccess](#) alert.
 - Updated the following sections for the Next Hop SCP Outlier Detection feature:
 - * Added the [Next Hop SCP Outlier Detection](#) section to explain how SCP-C determines the status of SCP-P in inter-SCP scenarios.
 - * Added the following sections for the CNC Console configuration:
 - * [Configuring Global Options](#): To configure service status of SCP in the **System Config** section.
 - * [Configuring Routing Options](#): To configure reroute conditions using the **Reroute Condition List** field in the "Next Hop Proxy" tab.
 - * Added the `ocscp_worker_odh_response_tx_total` metric in the [Metrics](#) section.
 - Updated the following sections for the Support for Subscriber ID to Group ID Resolution feature:
 - * Added the [Support for Subscriber ID to Group ID Resolution](#) section to explain how SCP supports subscriber ID to group ID resolution through SLF lookup and performs NF discovery from NRF using the group ID instead of the subscriber ID.
 - * Added the following sections for the CNC Console configuration:
 - * [Configuring SubscriberId to NF GroupId Resolution](#): To enable or disable the subscriber ID to group ID resolution.
 - * [Configuring IE Registry](#): To configure Information Element (IE) Registry and create a new custom discovery query parameter.
 - * [Configuring Exception Config Set](#): To configure exception conditions.
 - * [Configuring NF Group ID Retrieval](#): To configure NF group ID retrieval IE binding information.
 - * Added the following metrics in the [Metrics](#) section:
 - * `ocscp_worker_nfgroupid_resolution_total`

- * `ocscp_worker_nfgroupid_resolution_failure_total`
 - * `ocscp_worker_scp_originated_http_tx_req_total`
 - * `ocscp_worker_scp_originated_http_rx_res_total`
 - * `ocscp_metric_ondemand_discovery_tx_req_total`
 - * `ocscp_metric_ondemand_discovery_rx_res_total`
 - * Added the [SCPnfGroupldDiscoveryFailure](#) alert.
- Updated the following sections as part of the SCP Capacity enhancements:
 - * Added the [SCP Capacity Enhancements](#) section to explain how SCP enhances SCPC-Notification and SCPC-Audit microservices to process 3,000 NF profiles.
 - * Added the [Configuring NF Topology Audit](#) section to configure audit interval for each NRF set.
 - * Added the [SCPAuditDurationExceeded](#) alert.
- Updated the [Verbose Logging for SCP](#) section with information about the log levels and event IDs for SCP-Worker, SCP-nrfProxy, and SCPC-Notification. This is part of the Verbose Logging enhancements.
- Added the following alerts as part of the Rate Limiting enhancements:
 - * [SCPGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold](#)
 - * [SCPGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold](#)
 - * [SCPEgressRateLimitActiveKeyCountAboveMajorThreshold](#)
 - * [SCPIngressRateLimitActiveKeyCountAboveMajorThreshold](#)
 - * [SCPIngressRateLimitActiveKeyCountAboveCriticalThreshold](#)
 - * [SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold](#)
 - * [SCPEgressRateLimitActiveKeyCountAboveCriticalThreshold](#)
 - * [SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold](#)
- Made the following changes as part of the TLS Support for SCP to cnDBTier Traffic feature:
 - Added the [TLS Support for SCP to cnDBTier Traffic](#) section to describe how SCP supports secure database connections by using TLS 1.2 or TLS 1.3 and the corresponding cipher suites for the selected TLS version.
 - Added the following metrics in the [Metrics](#) section:
 - * `ocscp_alternate_resolution_db_connection_success_total`
 - * `ocscp_configuration_db_connection_success_total`
 - * `ocscp_notification_db_connection_success_total`
 - * `ocscp_subscription_db_connection_success_total`
 - * `ocscp_audit_db_connection_success_total`
 - * `ocscp_alternate_resolution_db_connection_failure_total`
 - * `ocscp_configuration_db_connection_failure_total`
 - * `ocscp_notification_db_connection_failure_total`
 - * `ocscp_subscription_db_connection_failure_total`
 - * `ocscp_audit_db_connection_failure_total`

General Updates

- Removed the `maxPayloadSizeInKb` parameter from the [Error Codes Generated by SCP](#) section because it is deprecated.
- Updated the [Dimension Description](#) section with information about the `ocscp_alternate_route_type` dimension to support a new value, `NF_DISCOVERY`.
- Made the following changes in the [Metrics](#) section:
 - The `eventType` dimension in the `ocscp_notification_request_total` metric supports `NF_REGISTERED`, `NF_PROFILE_CHANGED`, `NF_DEREGISTERED`, `NF_DELETED`, and `NF_CLEARED`.
 - Removed the `ocscp_consumer_info` dimension from the `ocscp_worker_transaction_time_exhausted_total` metric.
 - Removed the `ocscp_consumer_host` dimension from the following metrics:
 - * `ocscp_metric_http_tx_req_total`
 - * `ocscp_worker_pod_overload_discard_req_total`
 - * `ocscp_metric_5gsbi_tx_req_total`
 - Removed the following dimensions from the `ocscp_worker_custom_roaming_proxy_http_tx_req_total` metric:
 - * `ocscp_producer_service_instance_id`
 - * `ocscp_producer_nf_instance_id`
 - Removed the following dimensions from the `ocscp_metric_http_tx_req_total` metric:
 - * `ocscp_locality`
 - * `ocscp_producer_service_instance_id`
 - * `ocscp_producer_nf_instance_id`
 - * `ocscp_nf_setid`
 - * `ocscp_consumer_host`
 - * `ocscp_consumer_nf_instance_id`
 - * `ocscp_consumer_nf_type`
 - * `ocscp_consumer_nf_unique_id`
 - Removed the `ocscp_locality` dimension from the `ocscp_metric_http_rx_req_total` metric.
 - Removed the following dimensions from the `ocscp_metric_http_ar_tx_req_total` metric:
 - * `ocscp_locality`
 - * `ocscp_nf_setid`
 - * `ocscp_alternate_producer_nf_instance_id`
 - * `ocscp_alternate_producer_service_instance_id`
 - Removed the following dimensions from the `ocscp_metric_interscp_http_rx_res_total` metric:
 - * `ocscp_producer_nf_instance_id`
 - * `ocscp_nf_setid`

- * ocscp_res_msg_size
- * ocscp_producer_service_instance_id
- Removed the following dimensions from the ocscp_metric_sepp_http_rx_res_total metric:
 - * ocscp_locality
 - * ocscp_res_msg_size
 - * ocscp_producer_service_instance_id
 - * ocscp_producer_nf_instance_id
- Removed the following dimensions from the ocscp_worker_custom_roaming_proxy_http_rx_res_total metric:
 - * ocscp_res_msg_size
 - * ocscp_producer_service_instance_id
 - * ocscp_producer_nf_instance_id
- Removed the following dimensions from the ocscp_worker_custom_roaming_proxy_routing_attempt_fail_total metric:
 - * ocscp_locality
 - * ocscp_producer_service_instance_id
 - * ocscp_producer_nf_instance_id
- Removed the following dimensions from the ocscp_worker_custom_roaming_proxy_routing_attempt_fail_current metric:
 - * ocscp_locality
 - * ocscp_nf_type
 - * ocscp_nf_service_type
 - * ocscp_producer_service_instance_id
 - * ocscp_producer_nf_instance_id
- Removed the following dimensions from the ocscp_metric_egress_rate_limiting_throttle_req_total metric:
 - * ocscp_producer_nf_instance_id
 - * ocscp_consumer_nf_instance_id
 - * ocscp_consumer_nf_type
 - * ocscp_consumer_host
- Removed the following dimensions from the ocscp_metric_interscp_http_tx_req_total metric:
 - * ocscp_locality
 - * ocscp_producer_service_instance_id
 - * ocscp_producer_nf_instance_id
 - * ocscp_nf_setid
- Removed the following dimensions from the ocscp_metric_sepp_routing_attempt_fail_total metric:

- * ocscp_locality
- * ocscp_producer_service_instance_id
- * ocscp_producer_nf_instance_id
- Removed the following dimensions from the ocscp_metric_sepp_routing_attempt_fail_current metric:
 - * ocscp_locality
 - * ocscp_nf_type
 - * ocscp_nf_service_type
 - * ocscp_producer_service_instance_id
 - * ocscp_producer_nf_instance_id
- Removed the following dimensions from the ocscp_metric_upstream_service_time_total metric:
 - * ocscp_producer_service_instance_id
 - * ocscp_producer_nf_instance_id
- Removed the following dimensions from the ocscp_metric_routing_attempt_fail_total metric:
 - * ocscp_locality
 - * ocscp_producer_service_instance_id
 - * ocscp_producer_nf_instance_id
- Removed the ocscp_locality dimension from the ocscp_worker_custom_roaming_proxy_http_tx_res_total metric.
- Removed the ocscp_consumer_host dimension from the ocscp_metric_5gsbi_tx_req_total metric.
- Removed the following dimensions from the ocscp_metric_http_rx_res_total metric:
 - * ocscp_producer_service_instance_id
 - * ocscp_producer_nf_instance_id
 - * ocscp_nf_setid
- Added the ocscp_consumer_host dimension to ocscp_metric_ondemand_discovery_tx_req_total.
- Added the ocscp_consumer_host dimension to ocscp_metric_ondemand_discovery_rx_res_total.
- Added operation and scpinstanceid dimensions to ocscp_audit_tx_req_total.
- Added the scpinstanceid dimension to ocscp_audit_completion_time_total .
- Replaced the ocscp_requester_nf_type dimension with ocscp_consumer_nf_type in ocscp_worker_req_priority_capacity_enhanced_total.
- Renamed ocscp_metric_ssl_certificate_expire_total to ocscp_metric_ssl_certificate_expire.
- Updated the ocscp_nfdiscovery_req_type dimension with a new possible value, NEXT_HOP_DISCOVERY, in the [Dimension Description](#) section.

-
- Updated the `ocscp_metric_http_rx_req_total` metric description to state that this metric continues to include the `ocscp_authority` dimension even when `scpAuthorityMetricLabelDisabled` is set to true.
 - Added the following metrics in the [Metrics](#) section:
 - `ocscp_audit_request_total`
 - `ocscp_audit_response_total`
 - `ocscp_subscription_requests_total`
 - `ocscp_subscription_responses_total`
 - `ocscp_alternate-resolution_request_total`
 - `ocscp_alternate-resolution_response_total`
 - Added information about SCP features, configuration type, and the corresponding SKU names in the [Service Communication Proxy Features](#) section.
 - Added the `SCP_PROFILE_IMMUTABLE_FIELD_MISMATCH` event in the [Verbose Logging for SCP](#) section.

1

Introduction


This document provides information about how to use Oracle Communications Cloud Native Core, Service Communication Proxy (SCP) in the cloud native 5G core network.

SCP installation is supported over the following platforms:

- Oracle Communications Cloud Native Core, Cloud Native Environment (CNE)
- Oracle Cloud Infrastructure (OCI)
For more information, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

SCP is a 3GPP-defined network entity that works as an HTTP/HTTPS proxy in the 5G SBA control plane. 5G NFs communicate indirectly via the SCP in the indirect communication models.

Figure 1-1 Service Based Architecture (SBA) for 5G Core

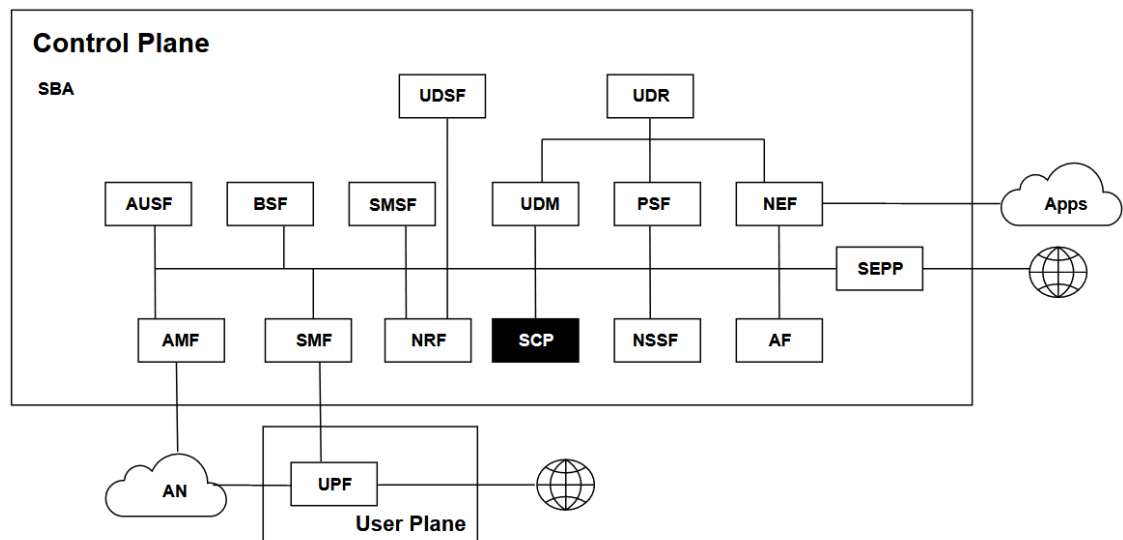

The core network in 5G follows a service-based architecture, where network functions provide services that can be utilized using REST APIs by other functions. This allows the adoption of web-scale technologies and software that are used by different organizations in the telecommunications network.

SCP provides the following functionalities in the 5G core:

- **Routing/Selection:** Routing rules, refresh cache, and handle application failures and redirects.
 - **Dynamic Discovery:** The 5G topology is learned from Network Repository Function (NRF) and routing rules are created automatically based on the learned NF profiles.
 - **Static Configuration:** SCP allows the configuration of NF profiles.

- **Load Balancing:** Load balancing based on NF set, priority, and capacity published in the NF profile.
- **NF Subscription:** Subscription for all NF types to learn the network topology.
- **Circuit Breaking:** Pro-active method to detect the degraded producer NF instances in the network. Implemented on a per FQDN basis when outstanding transactions exceed a configurable value.
- **Message Priority:** Message Priority assignment and override based on the 3GPP-SBI-Message-Priority header.
- **Congestion Control:** Congestion control for producer NF instances based on their published NF load.
- **Overload Control:** Avoids SCP failures by providing overload control for SCP-worker pods based on CPU usage. Uniform load balancing and routing strategy across the network and protects the pod from overload related to various system resources.

① Note

The following terms are not used interchangeably in this document. They define SCP's routing behavior for different scenarios:

- **Alternate Routing:** This term is used for the scenarios when SCP sends a request to an upstream producer and does not receive a successful response from the target upstream producer NF due to a request timeout, an error response, and so on. In such cases, SCP selects another equivalent available producer NF and performs routing to that producer NF. This routing to another equivalent available producer NF after the initial or prior routing failure is referred to as alternate routing.
- **Reselection:** This term is used when SCP selects an alternate producer NF different from the initially selected producer NF, without attempting to send the request to the initially selected producer NF.

SCP Availability

Oracle Communications Cloud Native Core, Service Communication Proxy (SCP) availability depends on many factors. SCP applications are designed to achieve 99.999% availability according to the applicable Telecommunications Industry Association TL9000 standards with the following deployment requirements:

- Deploy on a Cloud Native Environment with at least 99.999% availability.
- Deploy with $n + k$ (up to 2) application redundancy, where k is greater than or equal to one.
- Maintain production software within $n-3$ software releases, where n is the current general availability release.
- Apply bug fixes, critical patches, and configuration recommendations provided by Oracle promptly.
- Maintain fault recovery procedures external to the applications for the reconstruction of lost or altered files, data, programs, or Cloud Native environment.
- Install, configure, operate, and maintain SCP as per Oracle's applicable installation, operation, administration, and maintenance specifications.
- Maintain an active support contract and provide access to the deployed SCP and your personnel to assist Oracle in addressing any outage.

Note

The performance and capacity of the SCP system may vary based on the call model, feature or interface configuration, network conditions, and underlying CNE and hardware environment.

SCP availability is measured for each calendar year and is calculated as follows:

Table 1-1 Measuring SCP Availability

Availability	Description
Planned Product Availability	(Product available time in each month) less (Excluded Time (defined below) in each month).
Actual Product Availability	(Planned Product Availability) less (any Unscheduled Outage)
Product Availability Level	(Actual Product Availability across all Production instances divided by Planned Product Availability across all Production instances) x 100

Note

Excluded Time means:

- Scheduled maintenance time.
- Lack of power or backhaul connectivity, except to the extent that such lack of backhaul connectivity was caused directly by the CNC NF.
- Hardware failure.
- Issues arising out of configuration errors or omissions.
- Failures caused by third-party equipment or software not provided by Oracle.
- Occurrence of any event under Force Majeure.
- Any time associated with failure to maintain the recommended architecture and redundancy model requirements above.

1.1 References

- *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*
- *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*
- *Oracle Communications Cloud Native Core Automated Testing Suite Guide*
- *Oracle Communications Cloud Native Configuration Console Installation, Upgrade, and Fault Recovery Guide*

- *Oracle Communications Cloud Native Core, Network Repository Function User Guide*
- *Oracle Communications Cloud Native Core, Network Repository Function Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Cloud Native Environment User Guide*
- *Oracle Communications Network Analytics Data Director User Guide*
- *Oracle Communications Cloud Native Core, Certificate Management Installation, Upgrade, and Fault Recovery Guide*
- *Oracle Communications Cloud Native Core, Certificate Management User Guide*
- *Oracle Communications Cloud Native Core, OCI Deployment Guide*
- <https://github.com/k8snetworkplumbingwg/multus-cni>.


2

Service Communication Proxy Architecture

This section explains the Oracle Communications Cloud Native Core, Service Communication Proxy (SCP) system architecture.

SCP is a decentralized solution composed of control plane and data plane. This solution is deployed with 5G Network Functions (NFs) for providing routing control, resiliency, and observability to the core network.

Figure 2-1 Service Communication Proxy Architecture

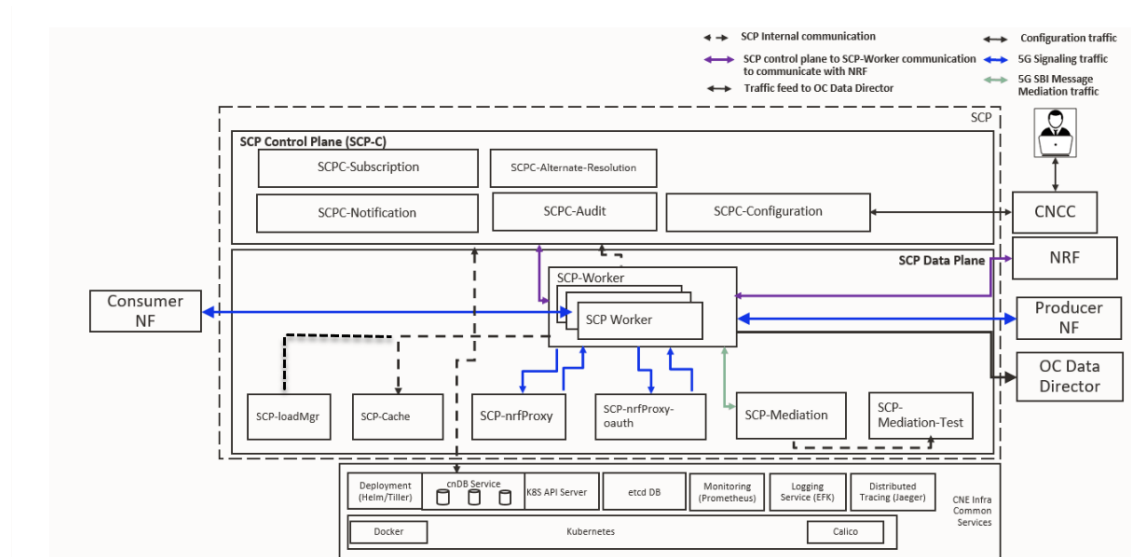

The SCP solution is deployed either as a default outbound proxy to NF instances or as a router model, where SCP is configured as HTTP2 outbound proxy at each NF in cloud native environments.

SCP Microservices

The list of SCP microservices is as follows:

Table 2-1 SCP Microservices

Microservices	Description
SCPC-Notification	It configures routing rules as per 5G NF topology information obtained from NRF, or as result of audit. It tracks the 5G NF topology for any change and updates in the route rules or configuration. It translates the topology into low-level SCP-Worker configuration and provides the configuration to the Worker when requested.

Table 2-1 (Cont.) SCP Microservices

Microservices	Description
SCPC-Audit	It performs periodic audit with NRF to synchronize the 5G NF topology information and updates routing rules through notifications if required.
SCPC-Configuration	It provides an interface for SCP configuration.
SCPC-Subscription	It performs NRF management and NRF discovery service operation for SCP registration and subscription for NF change notification.
SCPC-Alternate-Resolution	It finds an alternate NF service by performing DNS SRV queries with the DNS server and receives the DNS SRV responses. - Refreshes DNS SRV records to get update in DNS SRV records. - Provides DNS SRV records to scp-worker when required.
SCP-Worker	It receives 5G signaling traffic and controls communication and routing among 5G NFs and services. 5G NF selection for routing and rerouting across available 5G NFs - Endpoint selection based on NF profile information registered with NRF - Congestion control and traffic throttling using Ingress and Egress - Load balancing and overload control 5G SBI message priority assignment 5G SBI Mediation 5G Observability data
SCP-NrfProxy	It operates as an intermediate proxy between SCP-Worker and NRF for NF Discovery service requests originated by SCP. - It stores NF Discovery responses received from NRF through SCP-Worker. - It receives NF Discovery requests, along with query parameters from SCP-Worker, and forwards the created NF Discover requests to NRF through SCP-Worker. After receiving the NF Discovery responses from NRF through SCP-Worker, the nrfproxy service sends the response to SCP-Worker and stores the response for subsequent use.
SCP-Cache	It maintains the present status of ingress and egress traffic rate limiting and serves to the SCP-Worker microservice by storing the keys of rate limiting when required.
SCP-Mediation	It allows the modification of 5G SBI message content such as HTTP2 header values or JSON message body or the both, based on user-defined mediation rule sets to solve any inter-op issues. It applies user configured message mediation policy rules on ingress 5G SBI messages to execute message mediation transformation.
SCP-Mediation-Test	It enables to test the user configured message mediation policy test rules on ingress 5G SBI messages without actual execution on messages and mediation transformation.

Table 2-1 (Cont.) SCP Microservices

Microservices	Description
SCP-LoadManager	It manages the load and overload control information of peer NFs and SCPs on its own. It determines the latest load information from NRF or the LCI header using timestamp and shares the updated information with SCP-Worker pods using distributed cache. SCP-Worker pods process the received LCI information, update the routing rules, and use it for 5G SBI request routing and selection.
SCP-NrfProxy-Oauth	It is an intermediary proxy between SCP-Worker and NRF for processing OAuth2.0 access token service requests. It caches the OAuth2.0 access token received from NRF through SCP-Worker. It receives the OAuth2.0 access token request from SCP-Worker and forwards the created OAuth2.0 access token service request to NRF through SCP-Worker. After receiving the OAuth2.0 access token response from NRF through SCP-Worker, SCP-nrfProxy-Oauth sends the response to SCP-Worker and caches the response for subsequent use.


Ingress and Egress Gateway Traffic Management

For more information about Ingress and Egress Gateway Traffic Management, see *Oracle Communications Cloud Native Core, Cloud Native Environment User Guide*.

2.1 5G SBI Message Processing and Trigger Points

The following image represents how SCP processes ingress 5G SBI message requests from consumer NFs.

Figure 2-2 5G SBI Message Processing and Trigger Points

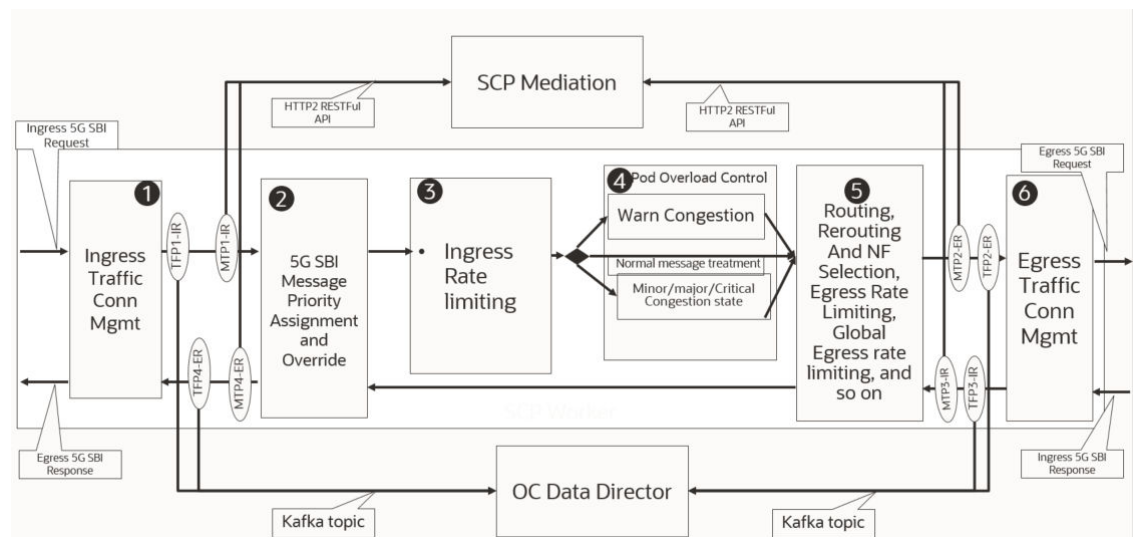

3

Service Communication Proxy Features

This chapter describes the features of Oracle Communications Cloud Native Core, Service Communication Proxy (SCP).

Note

The performance and capacity of the SCP system may vary based on the call model, feature or interface configuration, network conditions, and underlying CNE and hardware environment.

SCP Features List with Configuration Status

The following table describes SCP features, configuration type, and the corresponding SKU names:

Table 3-1 SCP Features List with Configuration Status

Feature Name	Enabled or Disabled by Default	Configuration Type (Helm, REST API, CNC Console, None)	Licensing SKU Name
Next Hop SCP Outlier Detection	Enabled	REST API and CNC Console	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Runtime Update for SCP Profile Parameters	Enabled	REST API, CNC Console, and Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for Subscriber ID to Group ID Resolution	Disabled	REST API and CNC Console	Oracle Communications Cloud Native Core, Enhanced Signaling Resiliency - 25K Active Subscribers Perpetual
Runtime Update for SCP Profile Parameters	Disabled	REST	Oracle Communications Cloud Native Core, Advanced Routing - 25K Active Subscribers Perpetual
Runtime Update for SCP Profile Parameters	Disabled	Helm	Oracle Communications Cloud Native Core, Advanced Cloud Native Environment – 25K Active Subscribers Perpetual
NF Discovery Enhancements	Disabled	REST API	Oracle Communications Cloud Native Core, Enhanced Signaling Resiliency - 25K Active Subscribers Perpetual

Table 3-1 (Cont.) SCP Features List with Configuration Status

Feature Name	Enabled or Disabled by Default	Configuration Type (Helm, REST API, CNC Console, None)	Licensing SKU Name
NF Selection Enhancements	Disabled	REST API	Oracle Communications Cloud Native Core, Enhanced Signaling Resiliency - 25K Active Subscribers Perpetual
Runtime Update for SCP Profile Parameters	Disabled	Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Runtime Update for SCP Profile Parameters	Disabled	Helm	Oracle Communications Cloud Native Core, Automated Test Tools and Scripts Suite - Node Perpetual
Runtime Update for SCP Profile Parameters	Enabled	CNC Console	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Topology Source Information Enhancements	Enabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for Default Notification Message Routing	Enabled	CNC Console	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for Sender NF Type based Routing Option Selection	Enabled	REST API and CNC Console	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for 3GPP Defined NFs, Custom NFs, and Custom NF Services	Enabled	REST API and CNC Console	Oracle Communications Cloud Native Core, Advanced Routing - 25K Active Subscribers Perpetual
Routing Options Enhancement to Control SCP Routing Features	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Runtime Update for SCP Profile Parameters	Enabled	REST API and CNC Console	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Routing Options Enhancements for Next Hop SCP and Notification or Callback Messages	Enabled	REST API and CNC Console	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Runtime Update for SCP Profile Parameters	Enabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual

Table 3-1 (Cont.) SCP Features List with Configuration Status

Feature Name	Enabled or Disabled by Default	Configuration Type (Helm, REST API, CNC Console, None)	Licensing SKU Name
Traffic Segregation	Disabled	REST API	Oracle Communications Cloud Native Core, Advanced Cloud Native Environment – 25K Active Subscribers Perpetual
TLS 1.3 Support for Kubernetes API	Enabled	Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Disabling mTLS to Establish Communication between SCP and cnDBTier	Disabled	Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
LCM Automation	Optional	Helm	Oracle Communications Cloud Native Core, Automated Lifecycle Management - 25K Active Subscribers
Error Response Enhancement	Enabled	REST API, CNC Console, and Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Log Enhancement for 5G SBI Error Responses Generated by SCP	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
NFProfile Processing Enhancements	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for cnDBTier APIs on the CNC Console	Enabled	REST API and CNC Console	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
NRF Configuration Using DNS SRV Resolution	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for Dual Stack	Disabled	Helm	Oracle Communications Cloud Native Core, Advanced Networking – 25K Active Subscribers Perpetual
Network Policies	Disabled	Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Pod Disruption Budget	Enabled	Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual

Table 3-1 (Cont.) SCP Features List with Configuration Status

Feature Name	Enabled or Disabled by Default	Configuration Type (Helm, REST API, CNC Console, None)	Licensing SKU Name
Horizontal Pod Autoscaler	Enabled	Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
SCP Response Timeout Extension	Enabled	REST API	Oracle Communications Cloud Native Core, Advanced Routing – 25K Active Subscribers Perpetual
Overload Control Based on the Overload Control Information Header	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for HTTPS	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
TLS Certificate Configuration Enhancement	Enabled	Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Runtime Update for SCP Profile Parameters	Enabled	Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for Automated Certificate Lifecycle Management	Enabled	Helm	Oracle Communications Cloud Native Core, Certificate Management - 25K Active Subscribers
Support for 3GPP Timestamp Related Headers	Disabled	REST API	Oracle Communications Cloud Native Core, Advanced Routing – 25K Active Subscribers Perpetual
Support for Multiple 3gpp-Sbi-Binding Headers	Enabled	None	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for Custom Roaming Proxy	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Enhanced NF Status Processing	Disabled	CNC Console	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Location Header for Host Mismatch	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual

Table 3-1 (Cont.) SCP Features List with Configuration Status

Feature Name	Enabled or Disabled by Default	Configuration Type (Helm, REST API, CNC Console, None)	Licensing SKU Name
Support for the Client Credentials Assertion Header	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for 5G SBI Message Correlation using the 3gpp-Sbi-Correlation-Info Header	Enabled	None	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
SCP Health Check API	Enabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Verbose Logging for SCP	Enabled	None	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Support for OAuth2.0	Disabled	Helm	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Pod Overload Control	Enabled	REST API and CNC Console	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Host Preference for Egress Message Requests	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Enhanced 5G SBI Message Failure Handling	Enabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
Extension of HTTP Status Code List for Rerouting	Disabled	REST API	Oracle Communications Cloud Native Core, Service Communication Proxy - 25K Active Subscribers Perpetual
5G SBI Message Mediation Support	Disabled	Helm	Oracle Communications Cloud Native Core, Interworking and Mediation Function - 25K Active Subscribers
SCP Health Check API	Disabled	REST API and CNC Console	Oracle Communications Cloud Native Core, Interworking and Mediation Function - 25K Active Subscribers

3.1 Runtime Update for SCP Profile Parameters

In SCP 25.2.201 and earlier releases, SCP Helm parameters could be configured only once during SCP installation. When it was required to update these parameters at runtime for SCP profile information, such as serving scope and mate site information, after deployment due to changes in the network architecture, SCP could not modify or reconfigure these Helm parameters using REST APIs, the CNC Console, or Helm updates.

From SCP 26.1.201, SCP can update some of its profile related Helm parameters that are part of the `scpProfileInfo` Helm parameter at runtime through REST APIs and the CNC Console. SCP supports runtime modification of the following SCP profile information parameters:

- `capacity`
- `customInfo.mateSiteInfo`
- `load`
- `locality`
- `nfStatus`
- `plmnList`
- `priority`
- `servingScope`

Note

- Runtime update for `plmnList` and `customInfo.mateScpInfoList` are already supported in earlier releases.
- It is recommended not to remove mandatory SCP profile information and global configuration Helm parameters that are required for SCP NF functional performance.

To update SCP profile (`nfStatus`) at runtime, you can use the `scpServiceStatus` REST API parameter, which indicates the service state of SCP and the error profiles it uses while rejecting SBI traffic.

Sample `scpServiceStatus` configuration:

```
"scpServiceStatus": {  
  "serviceStatus": "inService/deRegistered/outOfService/suspended",  
  "trafficRejectionErrorProfile": "defaultScpTrafficRejectionErrorProfile",  
  "fwdVendorSpecificIEInErrorRsp": "false",  
  "trafficRejectionDelay": "10s"  
}
```

`serviceStatus` configures the service state of SCP and can have the following values:

- `inService`: SCP registers with NRF with `nfStatus` set to `SUSPENDED`. It does not affect traffic processing by SCP-Worker. It continues to route traffic using existing rules.

- **suspended:** SCP registers with NRF with `nfStatus` set to `SUSPENDED`. SCP-Worker stops SBI traffic processing after the `trafficRejectionDelay` period. SBI traffic is rejected with a configurable (`trafficRejectionErrorProfile`) error response.
- **deregistered:** SCP deregisters or unsubscribes from all registered or subscribed NRFs. It does not affect traffic processing by SCP-Worker. It continues to route traffic using existing rules.
- **outOfService:** SCP deregisters or unsubscribes from all registered or subscribed NRFs. Additionally, SCP-Worker stops SBI traffic processing after the `trafficRejectionDelay` period. SBI traffic is rejected with a configurable (`trafficRejectionErrorProfile`) error response.

The following tables describe the behavior of SCP for different values of `serviceStatus`:

Table 3-2 Status for Control Plane Components

Status	Registration with NRF	NRF Heartbeat	Subscriptions	Audit
<code>inService</code>	Yes <code>nfStatus</code> is set to <code>REGISTERED</code>	Yes	Yes	Yes
<code>deregistered</code>	No <code>nfStatus</code> is set to <code>REGISTERED</code>	No	No	No
<code>outOfService</code>	No <code>nfStatus</code> is set to <code>REGISTERED</code>	No	No	No
<code>suspended</code>	Yes <code>nfStatus</code> is set to <code>SUSPENDED</code>	No	Yes	Yes

Table 3-3 Status for Data Plane Components

Status	SBI Requests	Internal Requests	Health Check Response	Upstream Health Check Enabled
<code>inService</code>	Yes	Yes	Yes Load Based Response	Yes
<code>deregistered</code>	Yes	Yes	Yes Load Based Response	Yes
<code>outOfService</code>	No	Yes	No Failure Response	No
<code>suspended</code>	No	Yes	No Failure Response	Yes

The columns in the above table represent the following:

- **Registration with NRF:** SCP registers with NRF.
- **NRF Heartbeat:** SCP intimates NRF that it is active.
- **Subscriptions:** SCP subscribes to various events of NRF.
- **Audit:** The SCP-Audit microservice performs periodic audit with NRF to synchronize the 5G NF topology information and updates routing rules through notifications if required.

- **SBI Requests:** SCP receives SBI messages from consumer NFs.
- **Internal Requests:** SCP microservices generate and send internal requests to NRF and other NFs or components within the network.
- **Health Check Response:** Error profiles are configured for the health query response when SCP is in the overload condition.
- **Upstream Health Check Enabled:** SCP health check API feature is activated for inter-scp scenarios.

SCP's serving localities are defined by `servingScope` and `mateSiteInfo` parameters. When you update these parameters, SCP might perform the following tasks:

- Reprocess external SCP profiles.
- Reprocess impacted NF profiles (based on the locality of the NF profiles).
- The above reprocessing is performed through on-demand audit.

Managing Runtime Update for SCP Profile Parameters

Enable

By default, this feature is enabled at the time of SCP deployment.

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about the CNC Console configurations, see the following sections:
 - [Configuring NF Profile](#): To configure self SCP profiles.
 - [Configuring Global Options](#): To configure service state of SCP.
- **Configure using REST APIs:** To configure this feature using the REST APIs, see the following sections in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*:
 - "Configuring System Options": Configure `scpServiceStatus` to define the service state of SCP.
 - "Configuring NF Profile": Configure self SCP profile parameters.
 - "Configuring SCP Features": Configure `suspendedRspProfile` for error profiles for the health query responses.

Observe

The `ocscp_self_profile_update_success_total` metric is used for this feature.

For more information about metrics, see [Metrics](#).

The [SCPSelfProfileUpdateSuccess](#) alert is used for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.

2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.2 Support for Subscriber ID to Group ID Resolution

In SCP 25.2.201 and earlier releases, SCP forwarded the discovery query parameters received from consumer NFs to NRF. These query parameters contained subscriber IDs, which NRF converted to group IDs while generating discovery responses by performing Oracle Communications Cloud Native Core, Unified Data Repository (UDR) lookups through SCP. This process of resolving subscriber IDs to group IDs led to additional hops between NRF and SCP, resulting in increased latency.

From SCP 26.1.201, SCP supports subscriber ID to group ID resolution through the Subscriber Location Function (SLF) lookup functionality of UDR. SCP performs NF discovery from NRF using the group ID instead of the subscriber ID. This feature relieves NRF from performing SLF lookups and enhances SBI message latency by removing additional SBI message hops between NRF, SCP, and SLF. For more information about SLF, see *Oracle Communications Cloud Native Core, Unified Data Repository User Guide*


In addition, this feature enables SCP to support caching of Model D discovery responses using the group ID instead of the subscriber ID, allowing efficient reuse of Model D discovery responses for subsequent SBI requests associated with the same group ID.

After receiving a service request or discovery request from the consumer NF, SCP initiates a request towards UDR to obtain the required group ID corresponding to the subscribed ID present in the discovery request query parameters, and then replaces the subscriber ID with the group ID before forwarding the discovery request to NRF. NRF uses this group ID to generate a discovery response with the profiles of producer NFs.

Note

SCP supports subscriber ID to group ID resolution only for Model D delegated discovery requests.

The following image represents the subscriber ID to group ID resolution process initiated by SCP in a next hop SCP scenario:

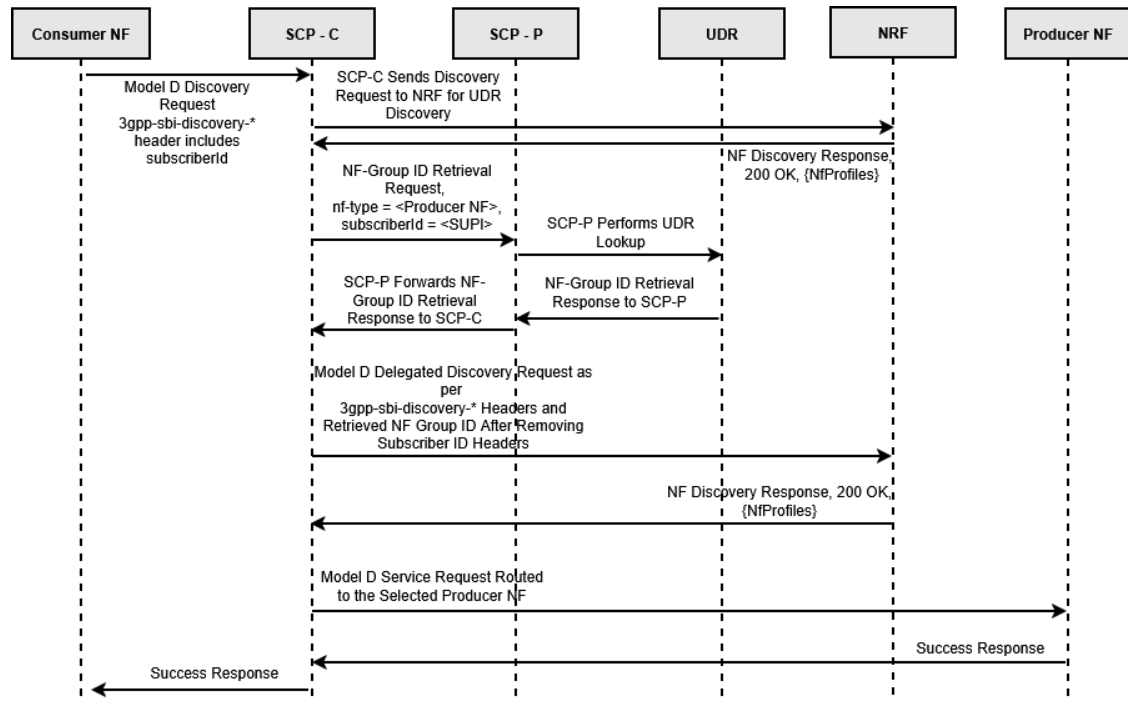Figure 3-1 SUPI to Group ID Resolution

The above mentioned image describes how SCP maps a subscriber ID to the required group ID by performing UDR lookup:

1. Consumer NF sends a Model D service request to the consumer SCP-C with discovery query parameter containing subscriber IDs.
2. SCP-C sends discovery requests to NRF to obtain details of the target producer UDR.
3. Based on the received UDR details from NRF, SCP-C selects the target SCP-P.
4. SCP-C retrieves the subscriber ID from the query parameters and sends a group ID retrieval request, containing NF type and subscriber ID, to the producer SCP-P.
5. SCP-P performs a UDR lookup to map the subscriber ID to the required group ID.
6. After retrieving the group ID, SCP-P sends the group ID information to SCP-C. The conversion of subscriber ID to group ID is known as subscriber ID to group ID resolution.
7. SCP-C replaces the subscriber ID with the group ID in the query parameters before forwarding the discovery request to NRF.
8. NRF receives the group ID information along with other discovery parameters and fetches the target producer NF details. Then, NRF sends the the target producer NF details to SCP-C.
9. Based on the received target producer NF details from NRF, SCP-C routes the request to the target producer NF.
10. The successful response from the producer NF is relayed to the consumer NF.

Managing Support for Subscriber ID to Group ID Resolution

Enable

By default, this feature is disabled at the time of SCP deployment. You can enable it by setting the `subid_to_nfgrp_id_resolution` parameter to true.

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about the CNC Console configurations, see the following sections:
 - [Configuring SubscriberId to NF GroupId Resolution](#): To enable or disable the subscriber ID to group ID resolution.
 - [Configuring IE Registry](#): To configure Information Element (IE) Registry and create a new custom discovery query parameter.
 - [Configuring Exception Config Set](#): To configure exception conditions.
 - [Configuring NF Group ID Retrieval](#): To configure NF group ID retrieval IE binding information.
- **Configure using REST APIs:** To configure this feature using the REST APIs, see the following sections in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*:
 - "Configuring SCP Features": Configure `subid_to_nfgrp_id_resolution` to enable or disable the subscriber ID to group ID resolution.
 - "Configuring IE Binding Info": Configure `nfgrp_idretrieval-cfg` to support dynamic headers for `queryMatch`.
 - "Configuring IE Registry": Configure `ims-domainname` for IP Multimedia Subsystem (IMS) domain name.
 - "Configuring NF Group ID Retrieval": Configure the `nf-grp-id-retrieval-rule-cfg` REST API for subscriber ID to group ID resolution.
 - "Configuring Exception Config Set": Configure the `exception-config-set` REST API for handling different error scenarios instead of returning an error response.

Observe

The following metrics are used for this feature:

- `ocscp_worker_nfgroupid_resolution_total`
- `ocscp_worker_nfgroupid_resolution_failure_total`
- `ocscp_worker_scp_originated_http_tx_req_total`
- `ocscp_worker_scp_originated_http_rx_res_total`
- `ocscp_metric_ondemand_discovery_tx_req_total`
- `ocscp_metric_ondemand_discovery_rx_res_total`

For more information about metrics, see [Metrics](#).

The [SCPNfGroupIdDiscoveryFailure](#) alert is used for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.

2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.3 Routing Options Enhancements

This section provides information about routing options enhancements for SBI messages, notifications, and next hop SCP.

3.3.1 Support for Default Notification Message Routing

During NF profile registration or update, NF has the ability to publish the Notification URI for default notifications. This is crucial due to the expected default Subscriptions in NF profiles. SCP plays a vital role in this process by creating routing rules for the purpose of routing 5G SBI messages. SCP achieves this by obtaining knowledge of the 5G topology from the NRF through NF status notifications. Previously, the SCP's topology learning did not include the default notification callback URI information published in the defaultNotificationSubscription attribute of the NF profile. Consequently, SCP remained unaware of these default notification callback URIs and was unable to do alternate routing of received default notification messages.

SCP has now significantly improved its topology learning process by incorporating the default notification URI and endpoint from both the NF profile and NF service level. As a result, SCP is now fully informed about these default notification callback URIs and possesses the capability to efficiently do routing and alternate routing of received default notification messages.

Managing Default Notification Message Routing

Enable

This feature is enabled by default in SCP at the time of deployment.

Configure

You can view or edit the default notification message subscription feature using the CNC Console. For information about this feature, see "Viewing or Editing the Default Notification Subscriptions section" in [Configuring NF Profile](#) to view the default notification message subscriptions that are present under NF service level or NF profile level.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.3.1.1 Default Notification Routing Behavior at SCP

The expected behavior at SCP based on the presence of various headers is as follows:

Table 3-4 Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
"/scp-default-sub-notify-uri"	Absent	Present	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	NA	SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type. Note: Only apiversion is considered from 3gpp-Sbi-Callback.
"/scp-default-sub-notify-uri"	Absent	Present	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	NA	400 Bad request cause: query parameter missing (TS29.500)

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
"/scp-default-sub-notify-uri"	Absent	Absent	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	NA	SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type at the NF profile level defaultnotification/subscription parameters. This is the default notification due to the presence of the 3gpp-Sbi-Discovery-notification-type header. apiversion =1 Note: Only apiversion is considered from 3gpp-Sbi-Callback.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										If not, the apiversion will be assumed to be 1.
"/scp-default-sub-notify-uri"	Absent	Absent	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	NA	400 Bad request cause: query parameter is missing (TS29.500)
non "/scp-default-sub-notify-uri"	Absent	Present	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Absent	SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type. SCP modifies the :path header as per the selected notification endpoint.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
non "/" scp-default-sub-notify-uri"	Absent	Present	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Absent	Selection of NF is dependent on the discovery response. The path will remain the same as it was when the consumer made their original request. Furthermore, the notification processing is non-default. For example, explicit notification since 3gpp-Sbi-Callback header is present. Note: The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										typical rule match. For more information, see Note at the bottom of this table if the notification message is without a service name.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	
":path"										-
non "/" scp-default-sub-notify-uri"	Absent	Absent	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Absent	SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type at the NF profile level defaultnotification/subscription parameters. This is the default notification due to the presence of the 3gpp-Sbi-Discovery-notification-type header. apiversion =1

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
non "/" scp-default-sub-notify-uri"	Absent	Absent	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Absent	Selection of NF is dependent on the discovery response. The path will remain the same as it was when the consumer made their original request. Moreover, non-default notification processing, normal discovery, and NF selection processing is applied. Note: The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match. For more information, see Note at

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										the bottom of this table if the notification message is without a service name.
non "/" scp-default-sub-notify-uri"	Absent	Present	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Present	SCP does callback URI selection based on 3gpp-Sbi-Routing-Binding header information along with other received header information.
non "/" scp-default-sub-notify-uri"	Absent	Present	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Present	NF selection is based on 3gpp-Sbi-Routing-Binding header information along with other received header information.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
non "/" scp-default-sub-notify-uri"	Absent	Absent	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Present	SCP does callback URI selection based on 3gpp-Sbi-Routing-Binding header information along with other received header information.
non "/" scp-default-sub-notify-uri"	Absent	Absent	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Present	NF selection is based on 3gpp-Sbi-Routing-Binding header information along with other received header information.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
"/scp-default-sub-notify-uri"	Present	Present	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	NA	First Attempt: Normal route to the selected producer with the received :path header. Alternate Attempt: SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type. SCP modifies the :path header as per the selected notification endpoint.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
"/scp-default-sub-notify-uri"	Present	Present	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	NA	First Attempt: Normal route to the selected producer with the received :path header. Alternate Attempt: Non-default notification processing , normal discovery, and NF selection processing Note: The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match. For more information, see Note at the bottom of this table if the notification

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										message is without a service name
"/scp-default-sub-notify-uri"	Present	Absent	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	NA	First Attempt: Normal route to the selected producer with the received :path header. Alternate Attempt: SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type. SCP modifies the :path header as per the selected notification endpoint

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
"/scp-default-sub-notify-uri"	Present	Absent	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	NA	First Attempt: Normal route to the selected producer with the received :path header. Alternate Attempt: Non-default notification processing , normal discovery, and NF selection processing Note: The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match. For more information, see Note at the bottom of this table if the notification

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										message is without a service name.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	
":path"										-
non "/" scp-default-sub-notify-uri"i.e., notification/ callback URI	Present	Present	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Absent	Model C Default notification processing with selected notification endpoint. First Attempt: Normal route to the selected producer with the received :path header. Alternate route: SCP performs the discovery and gets the callback URI from the selected consumer 's profile for the given notification type and apiversion in the callback header. SCP modifies

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										the :path header as per the selected notification endpoint.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
non "/" scp-default-sub-notify-uri"i.e., notification/ callback URI	Present	Present	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Absent	Explicit notification processing The first routing is based on the 3gpp-target-apiRoot header. Alternate routing is based on normal discovery and NF selection processing , as applicable. Note: The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match. For more information, see Note at the bottom of this table if the notification message

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										is without a service name.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
non "/" scp-default-sub-notify-uri"i.e., notification/ callback URI	Present	Absent	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Absent	Model C Default notification processing with selected notification endpoint. First Attempt: Normal route to the selected producer with the received :path header. Alternate route: SCP performs the discovery and gets the callback URI from the selected producer's profile for the given notification type at the NF profile level defaultnotification/subscription parameter

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										s. In the absence of a callback header, apiversion =1 is considered. This is the default notification due to the presence of the 3gpp-Sbi-Discovery-notification-type header. apiversion =1

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
non "/" scp-default-sub-notify-uri"i.e., notification/callback UR	Present	Absent	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Absent	Non Default notification processing The first routing is based on the 3gpp-target-apiRoot header. Alternate routing is based on normal discovery and NF selection processing , as applicable. Note: The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match. For more information, see Note at the bottom of this table if the notification

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										message is without a service name.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
non "/" scp-default-sub-notify-uri" i.e., notification/callback URI	Present	Present	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Present	Model C Default notification processing with selected notification endpoint. First Attempt: Normal route to the selected producer with the received :path header. Alternate route: SCP does callback uri selection based on 3gpp-Sbi-Routing-Binding header information along with other received header information. SCP gets the callback URI from the selected consumer

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										's profile for the given notification type and apiversion in the callback header. SCP modifies the :path header as per the selected notification endpoint. Note: 1. If servName is present in the 3gpp-sbi-Routing-binding header, then SCP gets the callback URI from the selected consumer 's profile for the given notification type for that service name. 2. If servName

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										is absent in the 3gpp-sbi-Routing-binding header, then SCP gets the callback URI from the selected consumer's profile for the given notification type from service level. If it is not found at the service level, it gets the callback URI from the profile level.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	
non "/" scp-default-sub-notify-uri" i.e., notification/callback URI	Present	Present	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Present	Explicit notification processing The first routing is based on the 3gpp-target-apiRoot header. Alternate routing is based on 3gpp-Sbi-Routing-Binding header information along with other received header information and NF selection processing as applicable. Note: The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match. For more information

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										n, see Note at the bottom of this table if the notification message is without a service name. Note: Alternate routing is only performed when servName is present in the 3gpp-sbi-Routing-binding header.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	
non "/" scp-default-sub-notify-uri" i.e., notification/callback URI	Present	Absent	Present	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Present	Model C Default notification processing with selected notification endpoint. First Attempt: Normal route to the selected producer with the received :path header. Alternate route: SCP does callback uri selection based on 3gpp-Sbi-Routing-Binding header info along with other received header info. SCP gets the callback URI from the selected producer's profile for the given

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										notification type at the NF profile level defaultnotification/subscription parameters. In the absence of a callback header, apiversion=1 will be considered. This is the default notification due to the presence of the 3gpp-Sbi-Discovery-notification-type header. apiversion=1 Note: If servName is absent in the 3gpp-sbi-Routing-binding header, then SCP gets the callback

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										URI from the selected consumer's profile for the given notification type from service level. If it is not found at the service level, it gets the callbackURI from the profile level.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
non "/" scp-default-sub-notify-uri" i.e., notification/callback URI	Present	Absent	Absent	Present	Present	Optional (don't care)	Optional (don't care)	Optional (don't care)	Present	Non-default notification processing The first routing is based on the 3GPP-target-apiRoot header. Alternate routing is based on 3gpp-Sbi-Routing-Binding header information along with other received header information and NF selection processing as applicable. Note: The callbackUri from defaultNotificationSubscriptions section is not considered. It goes with the typical rule match.

Table 3-4 (Cont.) Default Notification Routing Behavior

Pseudo Header	3GPP 5G SBI Custom Header									Expected Behavior at SCP
":path"	3gpp-sbi-target-apiRoot Header	3gpp-Sbi-Callback Header	3gpp-Sbi-Discovery-notification-type(Mandatory) Header	3gpp-Sbi-Discovery-target-nf-type Header	3gpp-Sbi-Discovery-requester-nf-type Header	3gpp-Sbi-Discovery-n1-msg-class Header	3gpp-Sbi-Discovery-n2-info-class Header	3gpp-Sbi-Discovery-* Header	3gpp-sbi-Routing-binding Header	-
										For more information, see Note at the bottom of this table if the notification message is without a service name. Note: Alternate Routing is only performed in case when servName is present in 3gpp-sbi-Routing-binding header.

Note

SCP behavior for Notification message without service name is as follows:

- SCP does the rule match or delegated discovery based on available information from the service request.
- SCP selects profile level FQDN for routing.
- SCP uses 80 as the default port for routing.
- SCP uses "http" as the default port for routing.

3.3.2 Support for Sender NF Type based Routing Option Selection

In SCP 25.1.200 and earlier releases, a generic routing options configuration was available to match the values of configured routing option parameters with the corresponding header attributes of ingress service requests or notification messages. This generic matching process was used to determine the most suitable routing path to forward the ingress service requests and notification messages. In addition, when applying routing options, SCP previously used the default consumer NF type to route SBI and notification messages. As a result, SCP was unable to identify the services sending notification messages. Routing options could not consider the sender NF type when selecting the routing options for SBI requests or notifications. Therefore, SCP routed messages using the default routes based on the consumerNfType REST API configuration.

From SCP 25.2.100, SCP enhances its routing options configuration to identify the consumer NF type and services to apply routing options. SCP creates routing rules to route ingress message requests or notifications from consumer NFs to producer NFs. The Routing Options REST API uses the following parameters to provide match criteria for selecting a routing option:

- messageType
- notificationType
- nfType
- nfServiceName
- method
- apiSpecificResourceUri
- senderNFType
- notificationSender

SCP-Worker matches the parameters configured through the Routing Options Config REST API with the consumer and producer NF details obtained from the ingress message request headers, such as 3gpp-Sbi-Callback, User-Agent, XFCC, 3gpp-Sbi-Target-apiRoot, and so on, to determine the best matched routing options.

SCP uses the senderNFType parameter to identify the consumer NF for SBI and notification messages. The notificationSender parameter is used to identify the API (service operation) that sends notifications. Based on the identified message sender, SCP applies the configured routing options.

senderNFType identifies the consumer NF type by matching the configured NF type with values extracted from XFCC, User-Agent, or 3gpp-sbi-callback headers in the ingress message request. If senderNFType is not set to any specific value or NF type, "*" can be configured to accept any value during the routing option matching. Ensure that any NF type configured for senderNFType is also listed as one of the values for the nfType parameter in the NFTypes-NFServices REST API.

Extracting senderNFType from the REST API Message Body

You can extract the senderNFType information by querying the ConsumerInfo source, the ApiNameAxHeading REST API parameter, or the 3gpp-Sbi-Callback header in the following order, based on their availability or fallback for nfType:

1. If the ConsumerInfo source is available, nfType can be obtained from the User-Agent header or the XFCC header. The source depends on the primary and secondary header configuration in the ConsumerInfo REST API:

- If the primary header is configured as the XFCC header, extract nfType from the XFCC header.
 - If the primary header is configured as the User-Agent, extract nfType from the User-Agent header.
2. If the ApiNameAxHeading REST API parameter is available, use the ApiNameAxHeading value from the 3gpp-sbi-callback header. Perform a lookup in the NFTypes-NFServices REST API (SSE data) to find the corresponding nfType.
 3. If the 3gpp-Sbi-Callback header is available, extract nfType by splitting the header value on underscore (_). You must remove the first character from the output segment to get the nfType.
 4. If nfType cannot be determined using the above mentioned steps, a default value of "*" will be returned.

notificationSender specifies the details of the notification sender and is used to identify the API sending the notification. It matches the configured values of apiNameAxHeading and serviceOperation with the values in the 3gpp-Sbi-Callback header to identify the consumer NF service and operation types. To configure notificationSender in the Routing Options REST API, you must register apiNameAxHeading with NFTypes-NFServices REST API using the PUT operation. After the registration is done, the service type of the consumer NF can be configured using the registered apiNameAxHeading.

For more information about senderNFType and notificationSender parameters, see the "Configuring Routing Options Config" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Matching Notification Message Header Attributes with Routing Options Config Parameters Configured at SCP

This subsection explains how the parameters configured through the Routing Options Config REST API in SCP are matched with corresponding header attributes from notification messages to determine the best routing option match.

Sample header attributes obtained from a notification message:

```
3gpp-Sbi-Callback=Nudm_UECM_Update,
User-Agent=UDM-udm1svc.scpsvc.svc.cluster.local,
3gpp-Sbi-Target-apiRoot=http://ausf1svc.scpsvc.svc.cluster.local:8080/USEast,
3gpp-sbi-routing-binding=bl=nf-set;nfset=set1.ausfset.5gc.mnc012.mcc345;servName=nausf-auth
```

The following table describes the header attribute values:

Table 3-5 Notification Message Header Attributes

Notification Headers	Attributes
3gpp-Sbi-Callback	Nudm_UECM_Update
User-Agent	UDM-udm1svc.scpsvc.svc.cluster.local
3gpp-Sbi-Target-apiRoot	http://ausf1svc.scpsvc.svc.cluster.local:8080/USEast
3gpp-sbi-routing-binding	bl=nf-set;nfset=set1.ausfset.5gc.mnc012.mcc345;servName=nausf-auth

The following table provides a sample Routing Options Config REST API configuration at SCP:

Table 3-6 Routing Options Config Parameters Configured at SCP

Parameter	Configuration 1	Configuration 2	Configuration 3	Configuration 4
messageType	notification-message	notification-message	notification-message	notification-message
notificationType	*	*	*	*
nfType	AUSF	AUSF	AUSF	AUSF
nfServiceName	nausf-auth	nausf-auth	nausf-auth	nausf-auth
senderNFType	UDM	UDM	UDM	UDM
notificationSender.apiNameAxHeading	nudm_uecm	nudm-ee	Not configured	nudm_uecm
notificationSender.serviceOperation	Not configured	notify	Not configured	update
method	POST	POST	POST	POST
apiSpecificResourceUri	*	*	*	*

In the above table, all the header attributes of the notification message are matched with the parameters of Routing Options Config REST API. Where, Configuration 1, Configuration 2, Configuration 3, and Configuration 4 are different routing options configured at SCP. The key parameters that are considered for matching are nfType, nfServiceName, senderNFType, apiNameAxHeading, and serviceOperation.

The inference drawn after matching the values of the routing options parameters with the corresponding header attributes from the above tables is as follows:

- Configuration 1 is considered a partial match for the routing option because all key parameters except for serviceOperation, which is not configured, match the header attributes. Even if serviceOperation is configured with a mismatched value, for example, notify, Configuration 1 will still be considered a partial match because the value of serviceOperation does not align with the value of 3gpp-Sbi-Callback. In this case, a configuration where serviceOperation is not set (no value) will take precedence over the configuration with a mismatched value.
- Configuration 2 is considered a no match for the routing option because values of two key parameters, apiNameAxHeading and serviceOperation, mismatch the 3gpp-Sbi-Callback header attributes. In this case, SCP will consider the default routing option.
- Configuration 3 is considered a no match for the routing option because two key parameters, apiNameAxHeading and serviceOperation, which are not configured, mismatch the 3gpp-Sbi-Callback header attributes. In this case, Configuration 3 will take precedence over Configuration 2 and SCP will consider the default routing option.
- Configuration 4 is considered the best match for the routing option because all key parameters match the header attributes.

Sample Configuration 4:

```
{
  "configName": "config1_S1G3",
  "routingOptionsConfigData": {
    "messageType": ["notification-message"],
    "notificationType": ["*"],
    "nfType": "AUSF",
```

```

    "nfServiceName": "nausf-auth",
    "method": ["POST"],
    "apiSpecificResourceUri": ".*",
    "senderNFType": "UDM",
    "notificationSender": {
        "apiNameAxHeading": "nudm_uecm",
        "serviceOperation": "update"
    },
    "routingConfigSetName": "configsetname1_S1G3"
  }}

```

Use Case

SCP is unable to determine the best routing option.

Scenario

SCP determines routing options based on the configured routing-options-config REST API parameters as described in the "Configuring Routing Options Config" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. SCP uses the senderNFType parameter to identify the consumer NF type. It is set to "*" by default, indicating any NF type. This restricts operators from applying routing options based on a specific consumer NF type.

Sample configuration of senderNFType set to "*"

```

{
  "configName": "config1_S1G3",
  "routingOptionsConfigData": {
    "messageType": ["notification-message"],
    "notificationType": ["*"],
    "nfType": "AUSF",
    "nfServiceName": "nausf-auth",
    "method": ["POST"],
    "apiSpecificResourceUri": ".*",
    "senderNFType": "*",
    "routingConfigSetName": "configsetname1_S1G3"
  }}

```

To enable SCP identify the consumer NF type by matching the configured senderNFType with values extracted from XFCC, User-Agent, or 3gpp-sbi-callback headers, you must configure senderNFType to a specific value or NF type and not "*".

Sample configuration of senderNFType set to "UDM"

```

{
  "configName": "config1_S1G3",
  "routingOptionsConfigData": {
    "messageType": ["notification-message"],
    "notificationType": ["*"],
    "nfType": "AUSF",
    "nfServiceName": "nausf-auth",
    "method": ["POST"],
    "apiSpecificResourceUri": ".*",
    "senderNFType": "UDM",
    "notificationSender": {

```

```

        "apiNameAxHeading": "nudm_uecm",
        "serviceOperation": "update"
    },
    "routingConfigSetName": "configsetname1_S1G3"
  }}

```

```

    "apiNameAxHeading": "nudm_uecm", = notification sender service type
    "serviceOperation": "update" = operation

```

Managing Routing Options Enhancement for Notification Messages

Enable

This feature is enabled automatically at the time of SCP deployment.

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see the following sections:
 - [Configuring Routing Options](#)
 - [Configuring NFTypes-NFServices](#)
- **Configure using REST APIs:** For information about configuring REST APIs, see "Configuring Routing Options Config" and "Configuring NFTypes-NFServices" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

There are no specific metrics and alerts required for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.3.3 Routing Options Enhancement to Control SCP Routing Features

At SCP, there are a number of routing features, such as Circuit Breaking, Outlier Detection, and so on, that proactively track the producer NF to determine the load conditions and health status of the producer NF and perform reselection of incoming SBI messages that are targeted towards the degraded producer NFs.

With this enhancement, SCP supports proactive reselection, in which a user can control the applicability of routing features at the NF service level by providing options to enable or disable upstream producer reselection.

The following routing features at the NF service level can be enabled or disabled:

- Congestion control based on Producer load

- Using producer load from NRF
- Using producer load in the LCI header
- Circuit Breaking
- Outlier Detection

Note

Alternate routing based on the following conditions is not impacted by this enhancement:

- Error received from the producer
- A request timeout at SCP
- Transport error at SCP during connection creation

Managing Routing Options Enhancements**Enable**

You can enable this feature by setting `odEnabled`, `loadBasedCongestionControlEnabled`, `cbEnabled` parameters to true. For more information, see [Configuring Global Options](#), [Configuring Routing Options](#), and [Configuring Routing Config Set](#) respectively.

Configure

You can configure this feature using REST APIs as described in "Routing Option Configuration", "Congestion Control Configuration", "Routing Config Set", "Circuit Breaking Configuration", "Configuring Routing Option", and "Configuring System Option" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.3.3.1 Alternate Routing Configuration Based on Received Status Code 504, Expired Response Timeout and Connection Error

SCP enhances the routing of Service-Based Interface (SBI) requests by allowing configurable error code-based rerouting. This improvement allows users to configure retries based on timeouts received from upstream producers, locally detected timeouts, or both.

Previously, SCP rerouted requests based on HTTP response codes from upstream NF, SCP, or SEPP. If a request timed out and no response was received, SCP automatically rerouted the request when retries were enabled, using the configured error code of 504.

The following enhancements allow better error handling capabilities:

- **Customizing Configuration for Rerouting on Timeout:** It allows you to enable or disable rerouting of requests that encounter a local timeout, such as response timeouts detected by SCP, providing flexibility to manage routing based on operational requirements.
- **Timeout Differentiation Functionality:** It distinguishes between local timeouts (indicated by a local 504 response) and 504 responses received from upstream components.
- **Support for Error Conditions for Alternate Routing:** If SCP faces other errors such as `connectionError` or `timeout`, while routing to the upstream server, and if these errors are configured, SCP tries rerouting based on the configured alternate routing mechanism. The following error condition parameters can be used in `rerouteConditionList`:
 - `connectionError`: When SCP tries to send requests but fails due to any connection error, SCP relies on lower layers for getting exceptions on any connection error.
 - `timeout`: When SCP sends requests but does not receive any response from upstream, SCP timeout occurs locally waiting for a response.

For more information about `connectionError` and `timeout`, see "Configuring Routing Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Managing Alternate Routing Configuration

Enable

This feature is integrated with the alternate routing functionality.

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Routing Config Set](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Routing Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.3.4 Routing Options Enhancements for Next Hop SCP and Notification or Callback Messages

The existing configuration of routing options supports 3GPP defined 5G NF services types, such as `nudm-uecm`, `nudm-sdm`, `nsmsf-sms`, and so on. However, there is no routing option defined for the following:

- 5G SBI notification or callback requests
- Inter-SCP or next hop SCP routing

With the introduction of this feature, the existing 5G SBI message routing option is enhanced to support:

- 5G SBI notification or callback message requests: SCP uses the "3gpp-sbi-callback" header to identify whether a 5G SBI request is a notification or callback.
- Inter-SCP or next hop SCP routing: When a consumer SCP routes a 5G SBI service request to the next hop SCP, the consumer SCP must have configurable routing options for SCP to SCP interface for each 3GPP defined 5G NF Service types, such as nudm-uecm, nudm-sdm, nsmsf-sms, and so on, if more than one SCP instance is involved in routing the 5G SBI service request. A new parameter known as nextHopSCP is introduced to the existing routing configurations to support this functionality.

This feature provides flexibility to configure inter-SCP or next hop SCP routing options for all services.

SCP derives an incoming message type from both "3gpp-sbi-callback" header and servicename in path to identify if it is a notification or callback request, or service request.

SCP uses the nextHopSCP routing configuration when routing messages towards the next hop SCP. The nextHopSCP routing parameters are set in SCP to define the message processing time to get a response from the producer NF instance in the same network or from another SCP instance in a different region.

Identification of 5G SBI Notification or Callback Messages

SCP identifies whether the ingress message request is a notification or callback, or service specific request based on the "3gpp-sbi-callback" header and the servicename in path present in the Uniform Resource Identifier (URI).

The following table describes different scenarios to identify a message request based on the availability of the "3gpp-sbi-callback" header and servicename in path.

Table 3-7 Identifying a Message Request

3gpp-sbi-callback	servicename in path	Description	Expected Routing at SCP
Present	Absent	The message request is considered as a 5G SBI notification or callback. Routing option configured for "5g-sbi-notification" is applicable. For more information about "5g-sbi-notification", see 3GPP TS 29.500 v16.6.0.	The expected notification message routing is as follows: • If the 3gpp-Sbi-Routing-Binding header is present, then the alternate routing as per Model C, Model D, and interPLMN traffic routing feature support at SCP. • If an alternate routing configuration is configured at SCP, then the alternate routing as per DNSSRV or route group configuration is supported at SCP. • If both alternate notification endpoint selection information is unavailable, SCP cannot perform notification message alternate routing.

Table 3-7 (Cont.) Identifying a Message Request

3gpp-sbi-callback	servicename in path	Description	Expected Routing at SCP
Present	Present	The message request is considered as a 5G SBI notification or callback. Routing option configured for "5g-sbi-notification" is applicable.	The expected notification message routing is as follows: - If the 3gpp-Sbi-Routing-Binding header is present, then the alternate routing as per Model C, Model D, and interPLMN traffic routing feature support at SCP. - If an alternate routing configuration is configured at SCP, then the alternate routing as per DNSSRV or route group configuration is supported at SCP. - If both alternate notification endpoint selection information is unavailable, SCP cannot perform notification message alternate routing.
Absent	Absent	The message request is considered as a 5G SBI notification or callback. Routing option configured for "5g-sbi-notification" is applicable.	The expected notification message routing is as follows: - If the 3gpp-Sbi-Routing-Binding header is present, then the alternate routing as per Model C, Model D, and interPLMN traffic routing feature support at SCP. - If an alternate routing configuration is configured at SCP, then the alternate routing as per DNSSRV or route group configuration is supported at SCP. - If both alternate notification endpoint selection information is unavailable, SCP cannot perform notification message alternate routing.
Absent	Present	The message request is considered as a 5G SBI service specific request. Routing option configured to specific 5G NF service is applicable.	The expected service request message routing is as follows: - If the 3gpp-Sbi-Routing-Binding header is present, then the alternate routing as per Model C, Model D, and interPLMN traffic routing feature support at SCP. - If an alternate routing configuration is configured at SCP, then the alternate routing feature as per DNSSRV or route group configuration is supported at SCP. - If both alternate notification endpoint selection information is unavailable, SCP will be unable to perform alternate routing based on reverse lookup feature support at SCP.

Managing Routing Options Enhancements for Next Hop SCP and Notification or Callback Messages

Enable

This feature is enabled automatically at the time of SCP deployment.

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using REST API:** For information about the REST API configurations, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **Configure using CNC Console:** For information about configuring NF instance IDs, see [Configuring the nextHopSCP Routing Option](#).

Observe

For information about metrics, see [Metrics](#).

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.4 Support for 3GPP Defined NFs, Custom NFs, and Custom NF Services

In SCP 24.3.0 and earlier releases, SCP supported only 3GPP defined NFs and NF services (a set of 3GPP defined NFs supported by SCP). To add any new NF or NF services, SCP required a software update.

From SCP 25.1.100, SCP enhances its capability to support the addition of new 3GPP defined NFs, custom NFs, and custom NF services at runtime using REST APIs. Any NF type or NF service that is not configured in SCP remains UNKNOWN. SCP creates routing rules for the newly added NF types and NF services without any software update. These routing rules are created to route any service message request or notification from consumer NFs to producer NFs.

Routing Options Selection

Any new 3GPP defined NFs, custom NF types, or custom NF services can be configured using the NFTypes-NFServices REST API. The `apiName` parameter is also configured with `NFType` and `NFService` REST API parameters to uniquely identify `NFType` and `NFService` pair. The `apiName` parameter is obtained from the service message request URI. For more information about the NFTypes-NFServices REST API, see "Configuring NFTypes-NFServices" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

SCP-Worker identifies the NF type and NF service of the request using the `apiName` REST API parameter from the received path URI [Request URI structure: `{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>`].

Sample NFTypes-NFServices REST API configuration

```

{
  "configName": "config1",
  "nfServiceData": {
    "nfType": "UDM",
    "serviceName": "nudm-uecm",
    "apiName": "apiName1",
    "serviceType": ["notification-message-service", "request-message-
service"]
  },
  "createdTimestamp": "2024-04-24 14:50:56.0",
  "updatedTimestamp": "2024-04-24 14:50:56.0"
}

```

The existing Routing Options REST API has been enhanced to include the following REST API parameters, along with `nfServiceName`, to provide match criteria for selecting a routing option:

- `messageType`
- `nfType`
- `senderNFType`
- `method`
- `notificationType`
- `apiSpecificResourceUri`

SCP-Worker extracts the above mentioned parameters from ingress message requests and matches them with the parameters of the Routing Options Config REST API configured at SCP to determine the best matched routing options. From the selected routing options, the `routingConfigSetName` parameter is obtained which points to the routing related parameters, such as `maxRoutingAttempts`, `responseTimeout`, and so on, to route message requests to producer NFs with the configured values obtained from `routingConfigSetName`. For more information about routing options and routing related parameters, see "Configuring Routing Options Config" and "Configuring Routing Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Matching Routing Options Config Parameters of Ingress Message Request with Routing Options Config Parameters Configured at SCP

This subsection describes how the Routing Options Config parameters of ingress message requests are matched with Routing Options Config parameters configured at SCP to determine the best match. The following table provides a sample Routing Options Config parameter configuration received from the ingress message request:

Table 3-8 Routing Options Config Parameters in the Ingress Message Request

Parameter	Value
<code>messageType</code>	<code>svc-request-message</code>
<code>nfType</code>	<code>PCF</code>
<code>senderNFType</code>	<code>AMF</code>
<code>nfServiceName</code>	<code>npcf-am-policy-control</code>
<code>method</code>	<code>POST</code>
<code>apiSpecificResourceUri</code>	<code>npcf-am-policy-control/v1/policies</code>

Table 3-8 (Cont.) Routing Options Config Parameters in the Ingress Message Request

Parameter	Value
notificationType	NA

The following table provides a sample Routing Options Config configuration at SCP:

Table 3-9 Routing Options Config Parameters Configured at SCP

Parameter	Rule1	Rule2	Rule3	Rule4
messageType	svc-request-message	svc-request-message, notification-message	notification-message	svc-request-message
nfType	PCF	*	PCF	PCF
senderNFType	AMF	*	*	*
nfServiceName	npcf-am-policy-control	npcf-am-policy-control	*	npcf-smpolicycontrol
method	POST	*	POST	POST
apiSpecificResourceUri	*	npcf-am-policy-control/v1/policies	*	*
notificationType	*	*	NA	*

The inference drawn from the above mentioned tables is as follows:

- All the parameters of Routing Options Config received from the message request are matched with the parameters configured for Rule1, Rule2, Rule3, and Rule4 at SCP.
- Rule1 is the best match because all its parameters match with the message request.
- Rule2 is the second best match due to mismatch of the values of nfType and senderNFType parameters.
- Rule3 and Rule4 are not the best matches because values of messageType and nfServiceName parameters did not match.

Service Level Features Configuration

NF Service level features, such as Outlier Detection, Circuit Breaking, Canary Release, Next Hop SCP, Overload Control Information, and so on, can be configured, and rule names can be defined by matching NFType and nfServiceName parameters of ingress message requests with the parameters of the NF Service Feature Config REST API configured at SCP. From the matched records, the nfServiceConfigSetName parameter is obtained, which points to cbEnabled, odEnabled, cbRuleName, odRuleName, and so on, to configure service level features. For information about NF Service Feature Config and NF Service Feature Config Set REST APIs, see "Configuring NF Service Feature Config" and "Configuring NF Service Feature Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

The following is a sample NF Service Feature Config Set REST API configuration:

```
{
  "configName": "udm_nudm_uecm_config1",
```

```

"nfServiceConfigSetData": {
  "defaultPriority": 1,
  "defaultCapacity": 65535,
  "altRoutingDnsSrvModeSupported": false,
  "loadBasedCongestionControlEnabled": true,
  "nfServiceLoadBasedCongestionControlCfg": "defaultRule",
  "cbEnabled": false,
  "cbRuleName": "defaultRule",
  "odEnabled": false,
  "odRuleName": "defaultRule",
  "ociEnabled": false,
  "ociRuleName": "defaultOciConfigRule",
  "canaryReleaseEnabled": false,
  "canaryReleaseConfigName": "default",
  "nextHopSCP": {
    "loadBasedCongestionControlEnabled": true,
    "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopScp"
  },
  "nextHopSEPP": {
    "loadBasedCongestionControlEnabled": true,
    "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopSepp"
  }
},

"createdTimestamp": "2024-05-02 02:26:30.0",
"updatedTimestamp": "2024-05-02 02:26:30.0"
}

```

Matching NF Service Feature Config Parameters of Ingress Message Request with NF Service Feature Config Parameters Configured at SCP

This subsection describes how NF Service Feature Config parameters of ingress message requests are matched with NF Service Feature Config parameters configured at SCP to determine the best match. The following table provides a sample NF Service Feature Config parameter configuration received from the ingress message request:

Table 3-10 NF Service Feature Config Parameters in the Ingress Message Request

Parameter	Value
NFType	PCF
nfServiceName	npcf-am-policy-control

The following table provides a sample NF Service Feature Config parameters configuration at SCP:

Table 3-11 NF Service Feature Config Parameters Configured at SCP

Parameter	RuleA	RuleB	RuleC	RuleD
NFType	PCF	*	PCF	PCF
nfServiceName	npcf-am-policy-control	npcf-am-policy-control	*	npcf-smpolicycontrol

The inference drawn from the above mentioned tables is as follows:

- All the parameters of NF Service Feature Config received from the message request are matched with the parameters configured for RuleA, RuleB, RuleC, and RuleD at SCP.
- RuleA is the best match because all its parameters match with the message request.
- RuleC is the second best match due to mismatch of the nfServiceName parameter value.
- RuleB and RuleD are not the best matches because the nfServiceName parameter value did not match.

Behavior of SCP when ignore_unknown_nfservice is Modified

The following scenarios describe behavior of SCP when NfType-NfService is added or removed and the ignore_unknown_nfservice parameter is enabled or disabled:

- ignore_unknown_nfservice is enabled and NfType-NfService is added: The existing NFProfiles are checked to detect the newly added NfType-NfService combinations. If any match is found, those NFProfiles are processed as reconfigured candidates, and routing rules are created. An on-demand audit is triggered for the new NfType from SCPC-Configuration.
- ignore_unknown_nfservice is enabled and NfType-NfService is removed: The existing NFProfiles are checked to detect the removed NfType-NfService. If any match is found, those NFProfiles are processed as reconfigured candidates, and the matching rule is removed only for the removed NfType-NfService.
When the last NfService under NfType is removed and if NfType is also removed from SCP's configuration, then the matching NFProfiles are deregistered. When the profile level FQDN is present, the rule is updated to have only the default service (profile level rule). When the profile level FQDN is absent, deregister the instance for any such profile.
- ignore_unknown_nfservice is disabled and NfType-NfService is added: The rule is added through an on-demand audit for added NfType-NfService.
- ignore_unknown_nfservice is disabled and NfType-NfService is removed: Deregister NFInstances for any matching NFProfile containing the removed NfType-NfService.

Managing Support for 3GPP Defined NFs, Custom NFs, and Custom NF Services

Enable

By default, this feature is enabled at the time of SCP deployment.

Configure

You can configure this feature using REST APIs and CNC Console.

The following table describes the sequence of REST API and CNC Console configurations:

Table 3-12 Configuration Sequence

Configuration Sequence	Description	Sample Configuration
1	Configure new 3GPP defined NFs, custom NF types, or custom NF services in SCP. For more information, see: - the "Configuring NFTypes-NFServices" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. - the Configuring NFTypes-NFServices section.	<pre>{ "configName": "udm_nudm-uecm", "nfServiceData": { "nfType": "UDM", "serviceName": "nudm-uecm", "apiName": "nudm-uecm", "serviceType": ["notification-message-service", "request-message-service"] } }</pre>
2	Define the topology source of the NFType by adding a new entry for this NFType or continue using the default entry if the Topology source is identical. For more information, see: - the "Configuring NF Topology Groups" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. - the Configuring Topology Source Info section.	<pre>{ "nfType": "*", "topologysource": "NRF" }</pre>
3	Feature configuration for both NFType and nfServiceName is done in the following sequence: 1. Configure feature set, such as Circuit Breaking, Outlier Detection, Egress Congestion Control, and Canary Release. 2. Bind the feature configuration set with NFType and nfServiceName. Note: The above mentioned configurations were part of the RoutingOptions table in 24.3.0 and earlier releases.	
3.1	Define Canary Release configuration as described in: - the "Configuring CanaryRelease Options" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. - the Configuring Canary Release section.	<pre>{ "configName": "udm-uecm-cr-config", "canaryData": { "apiFullVersion": "1.0.0", "canaryTraffic": 100 } }</pre>

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
3.1.1	Define NF Service Feature Config Set for newly configured NFType and nfServiceName configurations as described in: - the "Configuring NF Service Feature Config Set" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. - the Configuring NF Service Config Set section.	<pre>{ "configName": "udm-uecm-feature-config-set", "nfServiceConfigSetData": { { "defaultPriority": 1, "defaultCapacity": 65535, "altRoutingDnsSrvModeSupported": false, "loadBasedCongestionControlEnabled": false, "nfServiceLoadBasedCongestionControlCfg": "ss", "cbEnabled": false, "cbRuleName": "defaultRule", "odEnabled": false, "odRuleName": "defaultRule", "ociEnabled": false, "ociRuleName": "defaultOciConfigRule", "canaryReleaseEnabled": true, "canaryReleaseConfigName": "udm-uecm-cr-config", "nextHopSCP": { "loadBasedCongestionControlEnabled": true, "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopScp" }, "nextHopSEPP": { "loadBasedCongestionControlEnabled": true,</pre>

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
		<pre> "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopSepp " } } } </pre>
3.2	Bind the above mentioned NF Service Feature Config Set with newly configured NFType and nfServiceName as described in: - the "Configuring NF Service Feature Config" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. - the Configuring NF Service Feature Config section.	<pre> { "configName": "udm-uecm-feature-config", "nfServiceConfig": { "nfType": "udm", "nfServiceName": "nudm-uecm", "nfServiceConfigSetName": "udm-uecm-feature-config-set" } } </pre>
4	Routing Options REST API configuration is done in the following sequence to add new NF types and NF services: 1. Configure Routing Options REST API parameters for different features in SCP. 2. Bind the Routing Options Config Set with the match criteria. Note: The above mentioned configurations were part of the RoutingOptions table in 24.3.0 and earlier releases.	

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
4.1	Define Routing Options Config Set as described in: - the "Configuring Routing Config Set" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. - the Configuring Routing Config Set section.	<pre>{ "routingConfigSetName": "defaultRoutingConfigSet", "configureRoutingOptions": { "pod": { "maxRoutingAttempts": 1, "alternateRouting": true }, "alternateNFGroupRoutingOptions": { "mode": "NF_SET" }, "srv": { "name": "5g-sbi- notification", "maxRoutingAttempts": 3, "alternateRouting": true }, "totalTransactionLifetime" : "6s", "reRouteConditionList": [{ "statusCode": "307" }, { "statusCode": "308" }, { "statusCode": "429" }, { "statusCode": "5xx" }] } }</pre>

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
		<pre> "statusCode": "connectionError" }, { "statusCode": "timeout" }], "responseTimeout": "1s", "exceptionErrorResponses": [{ "name": "Destination_Exhausted", "action": "Send_Answer", "error_code": 504, "error_response": "Gateway Timeout", "error_profile": "default_exception_error_d estination_exhausted" }, { "name": "No_Response", "action": "Send_Answer", "error_code": 504, "error_response": "Gateway Timeout", "error_profile": "default_exception_error_n o_response" }, { "name": "Connect_Failure", "action": "Send_Answer", </pre>

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
		<pre> "error_code": 504, "error_response": "Gateway Timeout", "error_profile": "default_exception_error_c onnect_failure" }, { "name": "No_Host", "action": "Send_Answer", "error_code": 400, "error_response": "Bad Request", "error_profile": "default_exception_error_n o_host" }, { "name": "Insufficient_Time", "action": "Send_Answer", "error_code": 504, "error_response": "Gateway Timeout", "error_profile": "timeHdrInsufficientTimeEr rorProfile" }], "deploymentModel": "SITE_WIDE", "name": "5g-sbi- notification", "assignPreferredLocality": false, </pre>

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
		<pre> "overridePreferredLocality": false, "forwardRevisedPreferredLocality": false, "nextHopSEPP": { "totalTransactionLifetime": "7s", "responseTimeout": "4s", "service": { "maxRoutingAttempts": 2 }, "serviceEndpoint": { "maxRoutingAttempts": 1 }, "loadBasedCongestionControlEnabled": true, "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopSepp", "reRouteConditionList": [{ "statusCode": "307" }, { "statusCode": "308" }, { "statusCode": "429" }, { "statusCode": "5xx" }, { </pre>

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
		<pre> "statusCode": "connectionError" }, { "statusCode": "timeout" }], "exceptions": [{ "name": "No_Host", "action": "Send_Answer", "error_code": 400, "error_response": "Bad Request", "error_profile": "default_exception_error_n o_host" }, { "name": "Destination_Exhausted", "action": "Send_Answer", "error_code": 504, "error_response": "Gateway Timeout", "error_profile": "default_exception_error_d estination_exhausted" }] }, "nextHopScp": { "totalTransactionLifetime" : "7s", "responseTimeout": "4s", </pre>

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
		<pre> "reRouteConditionList": [{ "statusCode": "connectionError" }], "service": { "maxRoutingAttempts": 2 }, "serviceEndpoint": { "maxRoutingAttempts": 1 }, "loadBasedCongestionControlEnabled": true, "nfServiceLoadBasedCongestionControlCfg": "defaultRuleForNextHopScp" , "exceptions": [{ "name": "Destination_Exhausted", "action": "Send_Answer", "error_code": 504, "error_response": "Gateway Timeout", "error_profile": "default_exception_error_destination_exhausted" }] } </pre>

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
4.2	Bind the Routing Options Config Set with match criteria: Config_One: This Routing Options is applied for any message request from UDM/numd-uecm. If there is any notification message from UDM/numd-uecm, the default Routing Option preconfigured for the notification message ("defaultSvcNotificationConfig") is applied. Config_Two: This Routing Option is applied for any service request message from UDM/numd-uecm with HTTP Method as PUT. Create Routing Options Config Set "ro_config_set_two" as mentioned in sequence 4.1. Config_Three: This Routing Option is applied for service message requests from UDM/numd-uecm with HTTP Method as PATCH. - Create Routing Options Config Set "ro_config_set_three" as mentioned in Sequence 4.1 or any existing Routing Config Set if that satisfies the routing parameter configuration values. For more information about this configuration, see: - the "Configuring Routing Options Config" REST API section in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. - the Configuring Routing Options section.	Config_One <pre>{ "configName": "ro_config_one", "routingOptionsConfigData" : { "messageType": ["svc-request- message"], "notificationType": [], "nfType": "UDM", "nfServiceName": "nudm-uecm", "method": ["*"], "apiSpecificResourceUri": ".*", "senderNFType": "*", "routingConfigSetName": "ro_config_set_one" } }</pre> Config_Two <pre>{ "configName": "ro_config_two", "routingOptionsConfigData" : { "messageType": ["svc-request- message"], "notificationType": [], "nfType": "UDM", "nfServiceName": "nudm-uecm", "method": [</pre>

Table 3-12 (Cont.) Configuration Sequence

Configuration Sequence	Description	Sample Configuration
		<pre> "PUT"], "apiSpecificResourceUri": ".*", "senderNFType": "*", "routingConfigSetName": "ro_config_set_two" } } Config_Three { "configName": "ro_config_three", "routingOptionsConfigData" : { "messageType": ["svc-request- message"], "notificationType": [], "nfType": "UDM", "nfServiceName": "nudm-uecm", "method": ["PATCH"], "apiSpecificResourceUri": ".*", "senderNFType": "*", "routingConfigSetName": "ro_config_set_three" } } </pre>

Note

To remove NFTypes-NFServices and related configurations from SCP, follow the steps mentioned in the above table in reverse order.

Observe

The `ocscp_worker_routing_options_selected_total` metric is added in the [Metrics](#) section.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.5 Traffic Segregation

In SCP 24.3.x and earlier releases, SCP did not have an end-to-end network segregation mechanism based on traffic types. SCP was using the Load Balancer Virtual Machine (LBVM) and MetalLB features of Oracle Communications Cloud Native Core, Cloud Native Environment (CNE) to load balance the traffic received from consumer NFs and other components of Cloud Native Core (CNC).

From SCP 25.1.100, SCP uses Cloud Native Load Balancer (CNLB) of CNE to load balance traffic by segregating different traffic types, such as Operations, Administration, and Maintenance (OAM) traffic from CNC Console and Service Based Interface (SBI) signaling traffic from consumer NFs. CNE provides the CNLB functionality to manage load balancing as an alternative to the existing LBVM or MetalLB solutions. SCP continues to use LBVM or MetalLB and cannot enable CNLB if the CNE setup does not have CNLB enabled. Use of CNLB requires fresh installation of SCP if prior deployment is not using CNLB.

Note

CNLB is supported for both vCNE and BareMetal deployments of CNE.

For more information about CNLB, see *Oracle Communications Cloud Native Core, Cloud Native Environment User Guide*.

This feature enables SCP to:

- use dedicated subnetwork for different traffic types that improves security, reduces latency, and reduces congestion.
- address the challenge of logically separating different traffic types, which are typically handled through a single network (Kubernetes overlay).
- support the CNLB bypass feature using the Network Attachment Definitions (NADs) configuration under the 'network attachment' and 'cnlb' annotations as described at [Step 3](#). The CNLB bypass feature allows application pods to route egress traffic directly to external networks, bypassing CNLB. This functionality is intended for high-egress traffic scenarios where the NF cannot use multiple egress networks and when the Source Network Address Translation (SNAT) feature of CNLB is not required. For more information about the bypass functionality, see *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

The feature requires configuration of Network Attachment Definitions (NADs) and CNLB to facilitate traffic segregation and optimize load distribution in SCP.

CNLB uses Multus Container Network Interface (CNI), which creates different interfaces for the same or different traffic types. CNLB exposes its IP addresses and ports to consumer NFs to establish communication with SCP-Worker using the Network Attachment Definition (NAD) configuration. SCP registers with NRF using these IP addresses to enable other NFs to discover SCP in the network and notify their profile events to SCP through NRF. For more information about Multus and NAD, see [Support for Multus Container Network Interface](#).

Managing Traffic Segregation

Enable

By default, this feature is disabled at the time of SCP deployment. To enable this feature, perform the following procedure:

Note

If CNE is installed with CNLB, this feature should be enabled in SCP.

1. Open the `ocscp_values.yaml` file and set the `cnlbInfo.cnlbEnable` Helm parameter to `true`.
2. Configure the exposed external IPv4 and IPv6 addresses of CNLB using `cnlbInfo.cnlbIPv4` and `cnlbInfo.cnlbIPv6` parameters to enable other NFs to establish communication with SCP.

Note

You can configure either IPv4 or IPv6 or both.

For more information about `cnlbInfo.cnlbEnable`, `cnlbInfo.cnlbIPv4`, and `cnlbInfo.cnlbIPv6`, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Sample configuration:

```
cnlbInfo:
  # Enable/Disable cnlb, possible values are true or false. Default value
  # is false.
  cnlbEnable: true
  # CNLB IPv4 addresses
  cnlbIPv4:
    - 10.123.0.0
    - 10.123.0.1
    - 10.123.0.2
  # CNLB IPv6 addresses
  cnlbIPv6:
    - d678:f81d:a355:6794:658a:7e50:c208:7f0d
    - 0b3e:a0da:6c7f:ec79:75e7:40b2:3411:392e
    - 0d68:4f2b:649b:f97d:52e4:2036:d96c:8bad
```

3. Configure the 'network attachment' and 'cnlb' annotations in the `scp-worker.deployment.customExtension.annotations` Helm parameter. For more information about annotation values, see *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

Sample single network annotation:

```
scp-worker:
...
.

  deployment:
    ..
    # Labels and Annotations that are specific to deployment are added
    here.
    customExtension:
      labels: {}
      annotations:
        k8s.v1.cni.cncf.io/networks: default/nf-sig-ie3@nf-sig-ie3
        oracle.com.cnc/cnlb: '[{"backendPortName": "http2-5gsig",
"cnlbIp": "10.75.181.55", "cnlbPort": "8000"},
{"backendPortName": "https-5gsig",
"cnlbIp": "10.75.181.55", "cnlbPort": "9443"}]'
```

4. Save the `ocscp_values.yaml` file.
5. Run the following command to install SCP using charts from the Helm repository:

```
helm install <release name> -f <custom_values.yaml> --namespace
<namespace> <helm-repo>/chart_name --version <helm_version>
```

In case charts are extracted:

```
helm install <release name> -f <custom_values.yaml> --namespace
<namespace> <chartpath>
```

Configure

You can configure this feature using the following Helm parameters:

- `containerPortNames.scp-worker.http`
- `containerPortNames.scp-worker.https`
- `containerPortNames.scp-cache.coherence`
- `containerPortNames.scp-config.http`
- `cnlbInfo.cnlbEnable`
- `cnlbInfo.cnlbIPv4`
- `cnlbInfo.cnlbIPv6`
- `scpc-configuration.deployment.customExtension.annotations`
- `scp-cache.deployment.customExtension.annotations`
- `scp-worker.deployment.customExtension.annotations`

For information about the above mentioned Helm parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Observe

There are no specific metrics and alerts required for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.6 TLS 1.3 Support for Kubernetes API

In a Kubernetes-based 5G Core deployment, SCP communicates with the Kubernetes API server (Kube-API-Server) to retrieve Kubernetes secrets and configmap information.

With the implementation of this feature, SCP supports TLS 1.3 in addition to TLS 1.2 for establishing secure communication with the Kubernetes API server.

Managing TLS 1.3 Support for Kubernetes API**Enable**

This feature is enabled by default as it depends on the configuration of the Kubernetes cluster if it's using TLS 1.2 or TLS 1.3.

Configure

There is not specific configuration required for this feature.

Observe

There are no alerts and metrics for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.7 Disabling mTLS to Establish Communication between SCP and cnDBTier

Communication between SCP and cnDBTier uses Mutual Transport Layer Security (mTLS), which provides mutual authentication for both server and client, on an ASM setup. The mTLS method establishes a TLS connection between client and server to authenticate both server and client before sharing any data.

ASM-managed TLS certificates are configured in SCP and cnDBTier. This method enables you to disable mTLS on the SCP-to-cnDBTier interface.

① Note

- This migration requires cnDBTier 25.2.100 or later.
- In-service upgrade is not supported for this configuration. Traffic for the SCP site being upgraded to this release must be diverted to another site to isolate the current site. Disabling TLS is an offline procedure performed during the upgrade.

Managing mTLS to Establish Communication between SCP and cnDBTier

Enable

This feature is disabled by default.

Perform the following deployment procedure with destination rule to disable mTLS towards cnDBTier:

① Note

The procedure is applicable for fresh deployment of SCP.

1. Run the following command to create namespace label for auto sidecar injection and to automatically add the sidecars in all pods spawned in SCP namespace:

```
kubectl label ns <scp-namespace> istio-injection=enabled
```

The istio-injection label is enabled for the required namespace.

2. Deploy cnDBTier and set the `istioSidecarInject.mode` parameter to `external` in the `ocscp_dbtier_26.1.201_custom_values_26.1.201.yaml` file. For more information `istioSidecarInject.mode`, see *Oracle Communications Cloud Native Core, cnDBTier User Guide*.

This deployment should have sidecar injected only in the pods used for external communication.

3. Ensure that `scp-db-service-dr` is present in the `ocscp_servicemesh_config_values_26.1.201.yaml` file:
DestinationRule for `mysql-connectivity-service`:

```
host: <db-service-name>.<db-namespace>.svc.<domain> # change the host
detail with DB fqdn
  exportTo:
    - "." # refers to the current namespace
  mode: DISABLE
  name: scp-db-service-dr
  namespace: <scp-namespace> # change the namespace according to
deployment
  sbitimers: true
  tcpConnectTimeout: "750ms"
  tcpKeepAliveProbes: 3
```

```
tcpKeepAliveTime: "1500ms"  
tcpKeepAliveInterval: "1s"
```

4. Run the following command to install `ocscp-servicemesh-config` with `DestinationRule` `scp-db-service-dr`, where TLS communication to `mysql-connectivity-service` is set to `DISABLE`:

```
helm install ocscp-servicemesh-config -f values.yaml charts.tgz -n <scp-namespace> --timeout=30m
```

5. Deploy SCP with ASM enabled as described in the "Configuring SCP to Support Aspen Service Mesh" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

To migrate SCP to an ASM disabled cnDBTier, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Configure

There is not specific configuration required for this feature.

Observe

The [SCPMicroServiceUnreachable](#) alert is used for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.8 TLS Support for SCP to cnDBTier Traffic

In SCP 25.2.201 and earlier releases, SCP microservices connected to the database over unencrypted connections, making the traffic vulnerable.

From SCP 26.1.201, SCP supports secure database connections by using TLS 1.2 or TLS 1.3 and the corresponding cipher suites for the selected TLS version. You can also configure alerts for database connection certificate expiration.

Before you configure secure database connections, ensure that:

- DBTier (MySQL) is configured to accept TLS connections.
- Client certificates are generated by using the same certificate bundle as cnDBTier.

During the deployment, configure SCP with the following:

- Certificate and keys

- Authority certificate
- Keystore and truststore password files
- Secrets that contain the preceding files
- SSL algorithm (ECDSA or RSA)

The client certificates can be rotated at runtime by replacing them with new certificates that extend the expiration date. You can configure primary and secondary certificates. SCP uses the primary certificate at startup. When the primary certificate is close to expiration, SCP switches to the secondary certificate.

Managing TLS Support for SCP to cnDBTier Traffic

Enable

By default, this feature is disabled at the time of SCP deployment. You enable this feature by setting the `database.sslEnabled` Helm parameter to true.

Configure

You can configure this feature using the following Helm parameters described in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*:

- `database.sslEnabled`
- `database.ssl.tlsVersion`
- `database.ssl.cipherSuitesTlsV1_2`
- `database.ssl.cipherSuitesTlsV1_3`
- `database.ssl.primary.secretName`
- `database.ssl.primary.privateKey.rsaKey`
- `database.ssl.primary.privateKey.ecdsaKey`
- `database.ssl.primary.certificate.rsa`
- `database.ssl.primary.certificate.ecdsa`
- `database.ssl.primary.caBundle.filename`
- `database.ssl.primary.keyStorePassword.fileName`
- `database.ssl.primary.trustStorePassword.fileName`
- `database.ssl.secondary.secretName`
- `database.ssl.secondary.privateKey.rsaKey`
- `database.ssl.secondary.privateKey.ecdsaKey`
- `database.ssl.secondary.certificate.rsa`
- `database.ssl.secondary.certificate.ecdsa`
- `database.ssl.secondary.caBundle.filename`
- `database.ssl.secondary.keyStorePassword.fileName`
- `database.ssl.secondary.trustStorePassword.fileName`
- `database.ssl.dbSslAlgorithm`
- `database.ssl.minCertValidity`

To migrate SCP to a TLS-enabled cnDBTier, see the "Migrating SCP to a TLS-Enabled cnDBTier" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*

Observe

The following metrics are used for this feature:

- `ocscp_alternate_resolution_db_connection_success_total`
- `ocscp_configuration_db_connection_success_total`
- `ocscp_notification_db_connection_success_total`
- `ocscp_subscription_db_connection_success_total`
- `ocscp_audit_db_connection_success_total`
- `ocscp_alternate_resolution_db_connection_failure_total`
- `ocscp_configuration_db_connection_failure_total`
- `ocscp_notification_db_connection_failure_total`
- `ocscp_subscription_db_connection_failure_total`
- `ocscp_audit_db_connection_failure_total`

For more information about metrics, see [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.9 LCM Automation

In SCP 25.1.200 and earlier releases, there was an option to provide a value for `scpServiceAccountName` or leave it blank. If the name was provided, service account, role, and rolebinding used to be configured before providing the name in the `custom-values.yaml` file. If the name was not provided, SCP used to create the default service account, role, and rolebinding based on the release name.

The Lifecycle Management (LCM) Automation feature optimizes deployment and upgrade processes of SCP by automating service account creation. This enhancement allows you to automatically create user-defined service accounts without any manual intervention. The automation process includes:

- **Creating Service Account:** An automated resource service account creation has been introduced in this release to streamline the management of Kubernetes resources through Helm charts.
- **Applying NF Alert Configuration rules:** SCP leverages the `oso-alr-config` Helm chart, introduced as part of the Operational Service Overlay (OSO) package, to apply alert rules using Helm upgrades. SCP can apply the alert file during the installation of `oso-alr-config`

using Helm install. SCP can use Helm upgrade to update or clear the alerts. Both manual and automated configurations are supported.

OSO Alerts Automation

Alerts are automated by using the Helm upgrade command with the Helm chart provided as part of the OSO software package. For more information, see [OSO Alerts Automation](#).

Managing LCM Automation

Enable

You can enable this feature using the following methods:

- Manual: see the "Manually Creating Service Account, Role, and Rolebinding" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.
- Automatic: see the "Automatically Creating Service Account, Role, and Rolebinding" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Configure

You can configure this feature using the following Helm parameters as described in the "Global Parameters" section of *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*:

- `scpServiceAccountName`
- `autoCreateResources.enabled`
- `serviceAccounts.create`
- `serviceAccounts.accounts.scpServiceAccountName`
- `serviceAccounts.accounts.type`

Sample Helm configuration:

```
global:

  #Keyname to give custom service account name
  scpServiceAccountName: &scpServiceAccountName ""

  #Flag for auto-creation of resource, disabled by default
  autoCreateResources:
    enabled: false

  serviceAccounts:
    create: true #internal flag to decide if the following resources should
    be automated
    accounts:
      - scpServiceAccountName: *scpServiceAccountName
        type: SCP
```

Observe

There are no metrics, KPIs, or alerts available for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.10 Error Response Enhancement

SCP used to send error responses to consumer NFs while processing message requests from or to consumer NFs. SCP used to generate these error responses in conditions, such as connection failure, timeout, an unknown host at SCP, and so on. The error responses generated by SCP comprised the error description in the detail parameter of ProblemDetails, which was inadequate to troubleshoot an error.

The following sample ProblemDetails displays various parameters:

```
{
  "title": "Service Unavailable",
  "status": "503",
  "detail": "Currently Congested. Could not process request.",
  "cause": "NF_CONGESTION"
}
```

With the enhanced error response mechanism, SCP sends additional information, such as server FQDN, NF service name, vendor name, and error ID, in the detail parameter of ProblemDetails to find the specific cause of the error. This helps in error identification and reduces troubleshooting time.

SCP has enhanced ProblemDetails for all the SCP generated 5G SBI message responses to identify the cause of the errors and troubleshoot them in the production environment.

The detail parameter in ProblemDetails includes information about problem details and error IDs in the following format, which is applicable only for SCP generated error responses:

<SCP FQDN>: <SCP specific problem detail>: <OSCP-scp error Id>

Where,

- <SCP FQDN> is the FQDN of SCP.
- <SCP specific problem detail> is the problem details.
- <OSCP-scp error Id> is the error ID with respect to SCP. It follows this format:

OSCP-<Service code>-<Category>-<3 digit error code>

- <Service code> is the microservice code that generates the error.
- <Category> is the error type for a particular microservice.
- <3 digit error code> is the error code prefixed by the alphabet E.

For more information about supported error IDs, see [SCP Error IDs](#).

Example of a sample error response:

```
ProblemDetails
{
  "title": "Access Token Denied",
  "status": 403,
  "detail": "scp1.e.com: OAuth token denied for Server1-FQDN: OSCP-OAU-
TKNRSP-E001",
  "cause": ACCESS_TOKEN_DENIED
}
```

SCP combines all the error responses from both internal and external sources, such as error responses generated by SCP and error responses received from producer NFs while performing alternate routing. SCP uses the `enhanced_error_rsp` attribute to combine all the error responses from both internal and external sources. For more information about `enhanced_error_rsp`, see [Configuring Error Response Enhancement](#).

Note

- When the `enhanced_error_rsp` parameter is disabled, `ProblemDetails` includes information about the last routing attempt made by SCP.
- When the `enhanced_error_rsp` parameter is enabled, `ProblemDetails` includes information about all the routing attempts made by SCP.

When SCP receives a message request from a consumer NF, SCP routes the request to the target producer NF. If the target producer NF responds with an error message, SCP performs alternate routing to the next available producer NF. If SCP does not receive a success response from any producer NF after performing all the routing attempts, SCP generates an error response by updating the `detail` parameter with all the routing attempts made in the following format:

```
Latest attempt error string ; Status Code of previous attempt; Previous
attempt error string
```

Sample detail format:

```
"detail" : "<Server-NF FQDN>: <NF Service>: <Application specific problem
description>: <VendorNF-error-ID>; StatusCode; <SCP FQDN>: <Problem
Description>: <OSCP-scp error Id>"
```

Where,

- `<Server-NF FQDN>` is the FQDN of the NF that sends this error response. For example, `NRF-d5g.oracle.com`.
- `<NF Service>` is the NF service name applicable for 3GPP service operation. For example, `nnrf-disc`.
- `<Application specific problem description>` is a short description of the error. For example, `requesterNfType` should be present.

- <VendorNF-error-ID> is the error code generated by any vendor NF. For example, 0NRF-DIS-DISC-E0006.
- StatusCode is the HTTP status code for the previous routing attempt made by SCP. For example, 403.
- <SCP FQDN> is the FQDN of SCP. For example, ocscp-scp-worker.scpsvc.svc.cluster.local.
- <Problem Description> is the problem details. For example, Request cannot be routed due to rejection of access token request by NRF.
- <OSCP-scp error Id> is the ID of SCP. For example, 0SCP-0AU-TKNRSP-E001.

The following sample ProblemDetails is based on the scenario when SCP has made two retry attempts to two different Producer NFs and both resulted in error responses (first attempt: 503 and second attempt: 400) returned by producer NFs. SCP returns the last error response (400) to the consumer NF:

ProblemDetails

```
{
  "title": "Bad Request",
  "status": 400,
  "detail": "Server2-FQDN: [NF Service]:Application specific problem detail:
VendorNF-App-Error ID ; 503; Server1-FQDN: Application specific problem
detail: VendorNF-App-Error ID",
  "cause": INVALID_API
}
```

The title, status, and cause parameters in ProblemDetails provide information about the last routing attempt made. The detail parameter provides information about all the routing attempts in the reverse order.

Note

The error response sent by producer NFs is forwarded as it is to the consumer NF.

The detail parameter in ProblemDetails has a length restriction managed by the **Error Detail Max Size** field as described in [Configuring Error Response Enhancement](#). The extra length leads to truncation of data in the detail parameter from the end.

The following sample ProblemDetails is based on the scenario when a timeout has occurred at SCP during inter SCP communication:

```
{
  "title":"Timeout at SCP","status":504,
  "detail":"ocscp-scp-worker.scpsvc.svc.cluster.local:Service Unavailable for
pcf6svc.scpsvc.svc.cluster.local via scp61svc.scpsvc.svc.cluster.local:OSCP-
WRK-ROUTE-E001;504;ocscp-scp-worker.scpsvc.svc.cluster.local:Service
Unavailable for pcf6svc.scpsvc.svc.cluster.local via
scp51svcxyz.scpsvc.svc.cluster.local due to UnknownHostException:OSCP-WRK-
ROUTE-E002",
  "cause":"TIMED_OUT_REQUEST"}
```

The cause parameter of ProblemDetails provides a reason for the occurrence of the error, such as overload, access token denied, timeout, and so on. The cause parameter in ProblemDetails is managed as defined in Section 5.2.7 of 3GPP TS 29.500 v16.6.0. If this section does not mention the cause value for any specific error condition, SCP leaves the value of this parameter empty.

The following sample ProblemDetails does not specify the cause of the error:

```
ProblemDetails
{
  "title": "Unauthorized",
  "status": 401,
  "detail": "SCP-FQDN: Application specific problem detail: SCP-App-Error
ID",
  "cause": <empty>
}
```

Managing Error Response Enhancement

Enable

This feature is enabled automatically at the time of SCP deployment. You can enable or disable this feature using the CNC Console as described in [Configuring Error Response Enhancement](#).

Configure

You can configure this feature using REST APIs, CNC Console, and Helm.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Error Response Enhancement](#).
- **Configure using REST APIs:** For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **Configure using Helm:** For information about configuring the SCP-Mediation microservice, see "SCP-Mediation Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Observe

The `ocscp_worker_problemdetails_details_maxlengthexceeded_total` metric is added in the [Metrics](#) section.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.10.1 SCP Error IDs

The following table describes error IDs supported by SCP while generating error responses:

Table 3-13 SCP-Worker Microservice Error IDs

Error Details	Description	Possible Causes and Corrective Actions
Issue: Header Validation Error ID: OSCP-WRK-HDRVLD-E001 HTTP Response Code: The HTTP status code is populated based on the configured value in the ErrorProfileConfiguration REST API OR 403	This ID indicates that the received CCA header failed validation.	The Cause field is set based on the configured value in the ErrorProfileConfiguration REST API (such as, <code>errorProfile.getCause()</code>). OR CCA_VERIFICATION_FAILURE Corrective Actions The Consumer NF should send a valid CCA header.
Issue: Header Validation Error ID: OSCP-WRK-HDRVLD-E002 HTTP Response Code: 400	This ID indicates that the received SBI request does not contain all mandatory discovery headers required for Delegated NF Discovery.	Mandatory discovery headers were not received, resulting in missing required headers. MANDATORY_QUERY_PARAM_MISSING Corrective Actions The Consumer NF must send all mandatory discovery headers in Model-D SBI messages.
Issue: Header Validation Error ID: OSCP-WRK-HDRVLD-E003 HTTP Response Code: 400	This ID indicates that the SBI request received has a malformed 3gpp-sbi-routing-binding header.	A malformed Routing Binding header was received: <code><malformed-hdr></code> . MANDATORY_IE_INCORRECT Corrective Actions The Consumer NF should send a valid 3gpp-sbi-routing-binding header.
Issue: Header Validation Error ID: OSCP-WRK-HDRVLD-E004 HTTP Response Code: 400	This ID indicates that the received SBI request has imperfectly formed target PLMN.	A malformed Target PLMN was received. MANDATORY_IE_INCORRECT Corrective Actions The Consumer NF should send a valid value for the target PLMN in the Inter-PLMN SBI message.
Issue: Header Validation Error ID: OSCP-WRK-HDRVLD-E005 HTTP Response Code: 400	This ID indicates that the received SBI request has a malformed default notification request.	A malformed default notification request was received. MANDATORY_IE_INCORRECT Corrective Actions Consumer NF should send a valid header and URI for the default notification request.
Issue: Header Validation Error ID: OSCP-WRK-HDRVLD-E006 HTTP Response Code: 400	This ID indicates that the message could not be routed due to the absence of expected headers required to select a producer for routing.	Insufficient routing details were received in the request. MANDATORY_IE_MISSING Corrective Actions Consumer NF should send the appropriate headers for the 5G SBI message to be routed. For a Model-C request, either the 3gpp-sbi-target-apiroot or 3gpp-sbi-routing-binding header should be present. For a Model-D request, the 3gpp-sbi-discovery-* headers should be present.
Issue: Header Validation Error ID: OSCP-WRK-HDRVLD-E007 HTTP Response Code: 400	This ID indicates that the message could not be routed due to an invalid host value received in the 3gpp-sbi-target-apiroot header.	An invalid host value was received in the 3gpp-sbi-target-apiroot header. MANDATORY_IE_INCORRECT Corrective Actions Consumer NF should send a valid value for the host in the 3gpp-sbi-target-apiroot header.

Table 3-13 (Cont.) SCP-Worker Microservice Error IDs

Error Details	Description	Possible Causes and Corrective Actions
Issue: Header Validation Error ID: OSCP-WRK-HDRVLD-E008 HTTP Response Code: 400	This ID indicates that the incoming discovery query parameters or headers are not in the correct format.	Discovery query parameters decoding failed INVALID_DISCOVERY_QUERY_PARAM Corrective Actions Incoming discovery query parameters or headers should be in the correct format.
Issue: NF Selection Error ID: OSCP-WRK-NFSEL-E001 HttpStatusCode is populated based on the configured value for oscp.http.routing_failure.no_host in RoutingOptions.	This ID indicates that the message could not be routed due to the absence of a learnt producer for the received 3gpp-sbi-routing-binding header and the absence of the 3gpp-sbi-target-apiroot header.	No routing rule was found for the received SBI request. Corrective Actions The Consumer NF should either send the 3gpp-sbi-target-apiroot header or a different binding value for the 3gpp-sbi-routing-binding header to route the SBI message.
Issue: NF Selection Error ID: OSCP-WRK-NFSEL-E002 HTTP Response Code: 400	This ID indicates that the message could not be routed due to the presence of an API version in the incoming SBI request that is not supported by the NF producer, as per the learned NF profile available at the SCP.	NF selection failed due to an API version mismatch. INVALID_API Corrective Actions The Consumer NF should send the correct API version in the SBI message URI that is supported by the Producer NF providing the NF service.
Issue: NF Selection Error ID: OSCP-WRK-NFSEL-E003 HTTP Response Code: 400	This error ID indicates that the message could not be routed due to unavailability of producer NFs with valid mcc-mnc host (found after Delegated NF Discovery). Therefore, it could not fetch SEPP details.	Next hop SEPP details were not found after NF discovery for <targetPlmn>. UNSPECIFIED_MSG_FAILURE Corrective Actions The Consumer NF should send a different value for the 3gpp-sbi-discovery-* headers to enable Inter-PLMN routing.
Issue: NF Selection Error ID: OSCP-WRK-NFSEL-E004 HttpStatusCode is populated based on the configured value for oscp.http.routing_failure.no_host in RoutingOptions.	This ID indicates that the message could not be routed due to unavailability of serving SEPP for the inter-plmn. This is applicable for both Model-C and Model-D request routing models.	The Detail field is set based on the configured value in RoutingOptions against oscp.http.routing_failure.no_host (for example, eer.getError_response()) Corrective Actions The Consumer NF should send a different value for the 3gpp-sbi-target-apiroot header to enable Inter-PLMN routing.
Issue: NF Selection Error ID: OSCP-WRK-NFSEL-E005 HttpStatusCode is populated based on the configured value in the ErrorProfileConfiguration REST API	This ID indicates that the message could not be routed because the selected producer is congested and there is no other eligible producer available for routing.	The Cause field is set based on the configured value in the ErrorProfileConfiguration REST API (for example, NFSvcLoadBasedErrorProfileConfiguration.getErrCause()) Corrective Actions The Consumer NF should either send a different value for the headers to enable routing, or resend the request with the same header value once the load on the producer NF returns to a normal level.

Table 3-13 (Cont.) SCP-Worker Microservice Error IDs

Error Details	Description	Possible Causes and Corrective Actions
Issue: NF Selection Error ID: OSCP-WRK-NFSEL-E006 HttpStatusCode is populated based on the configured value for <code>ocscp.http.routing_failure.resource_exhausted</code> in RoutingOptions, or it defaults to 500.	This ID indicates that the message could not be routed because eligible producers were proactively filtered out due to circuit breaking, outlier detection, egress rate limiting, and so on.	The Detail field is populated based on the configured value for <code>ocscp.http.routing_failure.resource_exhausted</code> in RoutingOptions or Destination unreachable due to exhausted destination search. Corrective Actions Consumer NF should either send a different value for the headers to enable routing, or resend the request with the same header value once the producer NF becomes healthy.
Issue: OCI Error ID: OSCP-WRK-OCI-E001 The HttpStatusCode is populated based on the configured value in the ErrorProfile Configuration, if available, or, from the value of <code>ocscp.http.routing_failure.resource_exhausted</code> in the RoutingOptions.	This ID indicates that the message could not be routed because the eligible producer was filtered out for OCI.	The Detail field is populated based on the configured value in the ErrorProfile Configuration, if available. Alternatively, it is populated using the value for <code>ocscp.http.routing_failure.resource_exhausted</code> in RoutingOptions. Corrective Actions The consumer NF should either send different header values to facilitate routing or resend the request with the same header values once the OCI reduction criteria are removed from the producer NF.
Issue: SCP-W Mediation Interface Errors Error ID: OSCP-WRK-MEDITN-E001 The HttpStatusCode is populated based on the value configured in the ErrorProfile, or 500.	This ID indicates that an error response has been received by the SCP-Worker client from the Mediation service.	The Cause field is populated based on the value configured in AppRoutingOptionsConfig (for example, <code>errorProfileConfig.getErrorCause()</code>), or <code>continue_processing</code> . or Mediation client errors. Corrective Actions Ensure that the Mediation service is running and accessible.
Issue: SCP-W Mediation Interface Errors Error ID: OSCP-WRK-MEDITN-E004 HTTP Response Code: 500	This ID indicates that an error response has been received at the SCP-Worker client from the Mediation service due to transport failure.	Transport failure or UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the Mediation service is up and reachable.
Issue: SCP-W Mediation Interface Errors Error ID: OSCP-WRK-MEDITN-E005 HTTP Response Code: 500	This ID indicates that a decode failure occurred when processing the response received from Mediation.	Failure to decode the mediation message. or UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the appropriate rules are correctly configured in the Mediation.
Issue: Oauth Request Error ID: OSCP-WRK-OAUTH-E001 HTTP Response Code: 400	This ID indicates that the message could not be routed because the discovery headers, required to obtain the OAuth2 access token, are missing from the received request.	The request cannot be routed due to missing required OAuth2 access token information in the received request. MISSING_ACCESS_TOKEN_INFO Corrective Actions The consumer NF must include all mandatory headers required for the OAuth token request.

Table 3-13 (Cont.) SCP-Worker Microservice Error IDs

Error Details	Description	Possible Causes and Corrective Actions
Issue: OAuth Request Error ID: OSCP-WRK-OAUTH-E002 HTTP Response Code: 400	This ID indicates that the request could not be routed because OAuth2 access token was not received from consumer NF.	The request cannot be routed because the OAuth2 access token was not received from the consumer NF. ACCESS_TOKEN_NOT_RECEIVED Corrective Actions The consumer NF must include the OAuth token when sending an SBI message.
Issue: OAuth Request Error ID: OSCP-WRK-OAUTH-E003 HTTP Response Code: 400	This ID indicates that the message could not be routed due to an invalid OAuth2 access token.	The request cannot be routed because the OAuth2 access token is invalid. INVALID_ACCESS_TOKEN Corrective Actions Ensure that the mandatory headers required to obtain the access token from the NRF are valid.
Issue: OAuth Request Error ID: OSCP-WRK-OAUTH-E004 HTTP Response Code: 403	This ID indicates that the message could not be routed due to OAuth2 access token being denied.	The request cannot be routed because the OAuth2 access token has been denied. ACCESS_TOKEN_DENIED Corrective Actions The consumer NF should send the SBI message with updated header values in order to request the access token.
Issue: OAuth Request Error ID: OSCP-WRK-OAUTH-E005 HTTP Response Code: 500	This ID indicates that the message could not be routed because the access token request from the SCP-worker to the SCP-NrfProxy-Oauth service timed out.	The access token request timed out from SCP-worker to the SCP-NrfProxy-OAuth service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the scp-nrfproxy-oauth service responds within the specified timeout limit.
Issue: OAuth Request Error ID: OSCP-WRK-OAUTH-E006 HTTP Response Code: 500	This ID indicates that the message could not be routed because the access token request from the SCP-worker to the SCP-NrfProxy-Oauth service encountered a transport error.	The access token request could not be processed due to a transport error between SCP-worker and the SCP-NrfProxy-OAuth service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the scp-nrfproxy-oauth service is running and accessible.
Issue: OAuth Request Error ID: OSCP-WRK-OAUTH-E008 HTTP Response Code: 500	This ID indicates that the message could not be routed because the access token request from SCP-worker to SCP-NrfProxy-Oauth encountered an exception other than TimeoutException, ConnectException, or UnknownHostException.	The access token request could not be processed due to unknown errors when connecting SCP-worker to the SCP-NrfProxy-OAuth service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the scp-nrfproxy-oauth service is running and accessible.
Issue: OAuth Request Error ID: OSCP-WRK-OAUTH-E009 HTTP Response Code: 500	This ID indicates that the message could not be routed because the access token request from SCP-Worker to SCP-NrfProxy-Oauth failed due to decoding exception in the access token error response body to the ProblemDetails instance.	A failure in decoding the response body into a ProblemDetails instance for the access token request. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the scp-nrfproxy-oauth service returns an error response with the ProblemDetails information element (IE) in the response body.

Table 3-13 (Cont.) SCP-Worker Microservice Error IDs

Error Details	Description	Possible Causes and Corrective Actions
Issue: Ingress Rate Limiting Error ID: OSCP-WRK-IRTLMT-E001 The HttpStatusCode is populated based on the configured value in the IngressRateLimiter REST API.	This ID indicates that the message could not be routed because the ingress rate was more than the allowed rate configured for the consumer as specified by the rules configured in the Ingress Rate Limiter REST API.	The Detail field is populated based on the configured value in the IngressRateLimiter REST API (for example, <code>configData.getErrorResponse().getErrorResponse().NF_CONGESTION_RISK</code>). Corrective Actions To address the issue, either reduce the ingress rate or increase the allowed rate in the Ingress Rate Limiter REST API configuration.
Issue: Egress Rate Limiting Error ID: OSCP-WRK-ERTLMT-E001 The HttpStatusCode is populated based on the configured value in the EgressRateLimiter REST API.	This ID indicates that the message could not be routed because the ingress rate was more than the allowed rate configured for the consumer as specified by the rules configured in the Egress Rate Limiter REST API.	The Detail field is populated based on the configured value in the EgressRateLimiter REST API (for example, <code>streamInfo.getEgressRateLimitconfigData().getErrorResponse().getErrorResponse()</code>). NF_CONGESTION_RISK Corrective Actions To address the issue, either reduce the ingress rate or increase the allowed rate in the Egress Rate Limiter REST API configuration.
Issue: Routing Error ID: OSCP-WRK-ROUTE-E001 The HttpStatusCode is populated based on the value configured in RoutingOptions.	This ID indicates that the message could not be routed because a TimeoutException was encountered at the Worker Client while reaching the upstream producer.	The Detail field is populated based on the configured value in RoutingOptions, along with the attempted NF FQDN or IP. TIMED_OUT_REQUEST Corrective Actions Ensure that the producer NF responds within the timeout limit at SCP, or increase the response timeout limit at SCP.
Issue: Routing Error ID: OSCP-WRK-ROUTE-E002 The HttpStatusCode is populated based on the value configured in RoutingOptions.	This ID indicates that the message could not be routed because WebClientRequestException was encountered at the Worker Client while reaching upstream the producer NF. The WebClient exception could be a timeout, a connection failure, or any other error from WebClient.	The Detail field is populated based on the configured value in RoutingOptions, including the attempted NF FQDN or IP address. TARGET_NF_NOT_REACHABLE Corrective Actions Ensure that the producer NF is running and accessible.
Issue: Routing Error ID: OSCP-WRK-ROUTE-E003 The HttpStatusCode is populated based on the value configured in RoutingOptions.	This ID indicates that the message could not be routed due to an exception other than WebClientResponseException, WebClientRequestException, or TimeoutException encountered at the Worker Client while reaching upstream the producer NF.	The Detail field is populated using the configured value in RoutingOptions, along with the attempted NF FQDN or IP address. TARGET_NF_NOT_REACHABLE Corrective Actions Ensure that the producer NF is running and accessible.

Table 3-13 (Cont.) SCP-Worker Microservice Error IDs

Error Details	Description	Possible Causes and Corrective Actions
Issue: Routing Error ID: OSCP-WRK-ROUTE-E004 HTTP Response Code: 508	This ID indicates that the message could not be routed due to the presence of the SCP's self FQDN in the incoming SBI request's Via header. It also suggests that required headers or information, such as target-apiroot, binding headers, discovery headers, or any other necessary routing information, are missing from the request header.	A message loop has been detected. Corrective Actions Ensure that the SBI message does not contain the self FQDN in the "Via" header.
Issue: Routing Error ID: OSCP-WRK-ROUTE-E005 HTTP Response Code: 307 or 308 (as received from upstream NF)	This ID indicates that the SBI message has been redirected	A 3xx redirection was received from the upstream producer at ` <code><producer fqdn or IP></code> `.
Issue: Routing Error ID: OSCP-WRK-ROUTE-E006 The HttpStatusCode is populated based on the error response received from the platform service mesh.	This ID indicates that the message could not be routed due to an error response received from the platform service mesh.	An error response was received from the platform service mesh at ` <code><service mesh fqdn or IP></code> `. TARGET_NF_NOT_REACHABLE Corrective Actions Ensure that the producer NF is online and accessible, and confirm that the platform's service mesh is configured properly.
Issue: Routing Error ID: OSCP-WRK-ROUTE-E007 The HttpStatusCode is set based on the value configured in the RoutingOptions.	This ID indicates that the message could not be routed because the total transaction timeout for the service was reached.	The Detail field is populated based on the configured value in RoutingOptions, along with the attempted NF FQDN or IP address. TIMED_OUT_REQUEST Corrective Actions Ensure that the total transaction timeout is configured correctly and ensure there are no exceptions in the worker logs.
Issue: Routing Error ID: OSCP-WRK-ROUTE-E008 HTTP Response Code: HttpStatusCode is populated based on 'Insufficient_Time' exceptionErrorResponse configured in relevant Routing Config Set	This ID indicates that the message could not be routed due to a request timeout at SCP based on the timeout value received in the 3GPP-sbi-max-rsp-time header.	The request timed out at SCP based on the 3GPP-sbi-max-rsp-time header. TIMED_OUT_REQUEST Corrective Actions - Ensure that the 3gpp-sbi-max-rsp-time value in the ingress SBI request is correct. - Verify that the configured responseTimeout value is accurate. - Confirm that SCP and NFs are properly time synchronized. - Check if the producer NF responds within the time specified in the 3gpp-sbi-max-rsp-time header of the egress request.
Issue: Routing Error ID: OSCP-WRK-ROUTE-E009 HTTP Response Code: 500	This ID indicates that SCP has received a nonstandard HTTP status code from a producer NF.	Unknown Status Code UNKNOWN_STATUS_CODE Corrective Actions No corrective actions available.

Table 3-13 (Cont.) SCP-Worker Microservice Error IDs

Error Details	Description	Possible Causes and Corrective Actions
Issue: Routing Error ID: OSCP-WRK-ROUTE-E010 HTTP Response Code: HttpStatusCode is populated based on the trafficRejectionErrorProfile configured in the System Options REST API	This ID indicates that the message could not be routed because SCP is in a suspended or out-of-service state, during which it does not route SBI requests.	The Detail field is populated based on trafficRejectionErrorProfile configured in the System Options REST API. The Cause field is populated based on trafficRejectionErrorProfile configured in the System Options REST API. Corrective Actions Change the SCP service status to inService or deRegistered.
Issue: Delegated Discovery Error ID: OSCP-WRK-DELDISC-E001 HTTP Response Code: 500	This ID indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to TimeoutException.	The delegated discovery request timed out from SCP-worker to the SCP-NrfProxy service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure the scp-nrf-proxy service responds within the specified timeout limit.
Issue: Delegated Discovery Error ID: OSCP-WRK-DELDISC-E002 HTTP Response Code: 500	This ID indicates that the delegated discovery request from the SCP-worker to the SCP-NrfProxy service failed due to a WebClientRequestException.	Delegated discovery from SCP-worker to the SCP-NrfProxy service failed due to a transport error. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure the scp-nrf-proxy service is running and accessible.
Issue: Delegated Discovery Error ID: OSCP-WRK-DELDISC-E004 HTTP Response Code: 500	This ID indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to an exception other than TimeoutException, ConnectException, or UnknownHostException.	Delegated discovery from SCP-worker to the SCP-NrfProxy service failed due to an unknown error. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure the scp-nrf-proxy service is operational and reachable.
Issue: Delegated Discovery Error ID: OSCP-WRK-DELDISC-E005 HTTP Response Code: 500	This ID indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to decoding exception in the delegated NF discovery error response body to the ProblemDetails instance.	Failure in decoding the response body into a ProblemDetails instance for delegated discovery. UNSPECIFIED_NF_FAILURE Corrective Actions Ensures that the scp-nrf-proxy service returns an error response with a problemdetails information element in the response body.
Issue: Delegated Discovery Error ID: OSCP-WRK-DELDISC-E006 HTTP Response Code: 400	This ID indicates that the delegated discovery response does not contain the required service in the list of NF profiles.	Failure while processing delegated discovery request. NF_DISCOVERY_FAILURE Corrective Actions No action is required.
Issue: Pod Overload Error ID: OSCP-WRK-OVERLD-E001 The HttpStatusCode is populated based on the configured value in the ErrorProfile REST API.	This ID indicates that the SCP-worker pod is overloaded due to CPU overload or pending transactions.	The Cause field is populated based on the configured value in the ErrorProfile REST API, using the method <code>errorProfileConfiguration.getErrorCause()</code> . Corrective Actions The Consumer NF should send an SBI message to the SCP once it has recovered from the overload situation (either due to CPU usage or pending transactions). This recovery can be verified by monitoring the relevant SCP alerts.

Table 3-13 (Cont.) SCP-Worker Microservice Error IDs

Error Details	Description	Possible Causes and Corrective Actions
Issue: Internal Server Errors Error ID: OSCP-WRK-INTRNL-E001 HTTP Response Code: 500	This ID indicates that the message could not be routed due to downstream task queue being full.	The downstream task queue is full. UNSPECIFIED_NF_FAILURE Corrective Actions The Consumer NF may send the request after some time, once the SCP is able to process the message.
Issue: Internal Server Errors Error ID: OSCP-WRK-INTRNL-E002 HTTP Response Code: 500	This ID indicates that message could not be routed due to an exception caused failure of downstream asynchronous call.	The downstream asynchronous call failed. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the request contains valid data to prevent any exceptions from occurring.
Issue: Internal Server Errors Error ID: OSCP-WRK-INTRNL-E003 HTTP Response Code: 500	This ID indicates that the message could not be routed due to an exception encountered on the request processing path.	An uncaught exception occurred on the request path, resulting in an internal server error. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the request contains valid data to prevent any exceptions from occurring.
Issue: Internal Server Errors Error ID: OSCP-WRK-INTRNL-E004 HTTP Response Code: 500	This ID indicates that the message could not be routed due to an exception encountered on the response processing path.	An uncaught exception occurred on the response path, leading to an internal server error. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the response contains valid data to prevent any exceptions from occurring.
Issue: Internal Server Errors Error ID: OSCP-WRK-INTRNL-E005 HTTP Response Code: 500	This ID indicates that the message could not be routed due to an exception encountered during SBI message processing.	Unable to process the message due to an unknown error. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that both the request and response contain valid data to prevent any exceptions from occurring.
Issue: Internal Server Errors Error ID: OSCP-WRK-INTRNL-E006 HTTP Response Code: The status code from the producer.	This ID indicates that error rsp(4xx or 5xx) is received from upstream, and the content-type is problem-json but the response body is not in problemdetails format.	Failure in decoding the response body into a ProblemDetails instance. Corrective Actions Ensure that the producer NF sends a valid ProblemDetails information element in the error response body when the Content-Type is application/problem+json.
Issue: Internal Server Errors Error ID: OSCP-WRK-INTRNL-E007 HTTP Response Code: The status code from the producer.	This ID indicates that error rsp(4xx or 5xx) is received from upstream, but the content-type is not problem-json, application/json, or any other allowed format.	The Content-Type of the error response is not application/problem+json. Corrective Actions Ensure that the producer NF sends a valid ProblemDetails information element in the error response body when the Content-Type is application/problem+json.
Issue: Internal Server Errors Error ID: OSCP-WRK-INTRNL-E008 HTTP Response Code: 500	This ID indicates that Live Object pool is exhausted.	The live object pool is exhausted. Corrective Actions Ensure the object pool can adjust to instance creation and reclamation requests, or increase the pool size as needed.

Table 3-13 (Cont.) SCP-Worker Microservice Error IDs

Error Details	Description	Possible Causes and Corrective Actions
Issue: Roaming Proxy Selection Error ID: OSCP-WRK-RPSEL-E001 HTTP Response Code: 400	This ID indicates that the mandatory discovery parameter value could not be retrieved because it is absent in both the request and the configuration.	Mandatory Discovery Parameter <paramName> is missing in the request or configuration. MANDATORY_QUERY_PARAM_MISSING Corrective Actions Ensure that the values for all mandatory parameters are obtained either directly from the request or, if they are absent in the request, are configured in the Roaming Proxy Selection Information REST API.
Issue: Static NF Discovery Error ID: OSCP-WRK-LOCDISC-E001 HTTP Response Code: 400	This ID indicates that local NF discovery failed.	Static discovery failed, No Routing Rule found for the received SBI request NF_DISCOVERY_FAILURE Corrective Actions Ensure that a static discovery rule is created for the incoming query parameters, and that the NF profiles are registered with the SCP for the NF instances configured in the static rule.

Table 3-14 SCP OAUTH MICROSERVICE

Error Details	Description	Possible Causes and Corrective Actions
Issue: Access Token Request Error ID: OSCP-OAU-TKNREQ-E001 HTTP Response Code: 500	This ID indicates that NrfProxy-OAuth timed out while attempting to connect to the Worker to initiate the OAuth request towards NRF.	The access token request timed out at the NrfProxy-OAuth service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the worker sends a response within the response timeout limit at the NrfProxy-OAuth service.
Issue: Access Token Request Error ID: OSCP-OAU-TKNREQ-E002 HTTP Response Code: 500	This ID indicates that NrfProxy-OAuth failed to connect to the Worker to initiate the OAuth request towards NRF due to a WebClientRequestException.	The access token request failed due to a transport error at the NrfProxy-OAuth service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the worker is up and reachable for successful communication.
Issue: Access Token Request Error ID: OSCP-OAU-TKNREQ-E004 HTTP Response Code: 500	This ID indicates that NrfProxy-OAuth failed to connect to the Worker to initiate the OAuth request towards NRF due to an exception other than TimeoutException, ConnectException, or UnknownHostException.	The access token request failed due to an unknown error at the NrfProxy-OAuth service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the worker is up and reachable.
Issue: Access Token Response Error ID: OSCP-OAU-TKNRSP-E001 HTTP Response Code: 403	This ID indicates that the NrfProxy-OAuth service received a 400 Bad Request with an AccessTokenError payload from NRF for the access token request, and SCP converts it to a 403 with a ProblemDetails information element.	The request cannot be routed due to the rejection of the access token request by the NRF. ACCESS_TOKEN_DENIED Corrective Actions Ensure that the Consumer NF sends the access token request with valid headers and parameters.

Table 3-14 (Cont.) SCP OAUTH MICROSERVICE

Error Details	Description	Possible Causes and Corrective Actions
Issue: Access Token Response Error ID: OSCP-OAU-TKNRSP-E002 HTTP Response Code: 403	This ID indicates that the NrfProxy-OAuth service received a 200 response from NRF with an access token payload that is expired, and SCP converts it to a 403 with a ProblemDetails information element.	An expired access token was received from the NRF, with an expiration time of <exp-time>. ACCESS_TOKEN_DENIED Corrective Actions Ensure that valid request and response data is received by the NrfProxy-OAuth service for proper processing.
Issue: Access Token Response Error ID: OSCP-OAU-TKNRSP-E003 HTTP Response Code: 504	This ID indicates that the NrfProxy-OAuth service received a 307 response from NRF via the worker. SCP converts it to a 504, NRF_NOT_REACHABLE with 'ProblemDetails' information element.	The SCP could not obtain access from the NRF. The access token request failed because NRFs were not reachable. NRF_NOT_REACHABLE Corrective Actions Ensure that the NRFs configured for the access token procedure are reachable.
Issue: Internal Server Errors Error ID: OSCP-OAU-INTRNL-E001 HTTP Response Code: 500	This ID indicates that an exception was encountered while processing the access token request.	An uncaught exception occurred on the server, leading to an internal server error. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that valid request and response data is received by the NrfProxy-OAuth service for correct processing.
Issue: Internal Server Errors Error ID: OSCP-OAU-INTRNL-E002 HTTP Response Code: 500	This ID indicates that a downstream thread in the NrfProxy-OAuth service is stuck while processing the access token request.	The downstream thread for the Nrf-Proxy-OAuth service experienced a timeout. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the NrfProxy-OAuth service receives valid request and response data for proper processing.
Issue: Internal Server Errors Error ID: OSCP-OAU-INTRNL-E003 HTTP Response Code: 500	This ID indicates that an exception was encountered while processing the access token request or response.	The message could not be processed due to an unknown error. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the NrfProxy-OAuth service receives valid request and response data to ensure correct processing and avoid errors.

Table 3-15 SCP NRF-PROXY MICROSERVICE

Error Details	Description	Possible Causes and Corrective Actions
Issue: Delegated Discovery Request Error ID: OSCP-NPY-DISREQ-E001 HTTP Response Code: 500	This ID indicates that the NrfProxy timed out while attempting to connect to the Worker to initiate the delegated discovery request towards NRF.	The delegated NF discovery request timed out at the NrfProxy service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure the worker sends a response within the specified response timeout limit.
Issue: Delegated Discovery Request Error ID: OSCP-NPY-DISREQ-E002 HTTP Response Code: 500	This ID indicates that the NrfProxy failed to connect to the Worker to initiate the delegated discovery request towards NRF due to a WebClientRequestException.	The delegated NF discovery request failed due to a transport error at the NrfProxy service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the worker is up and reachable.

Table 3-15 (Cont.) SCP NRF-PROXY MICROSERVICE

Error Details	Description	Possible Causes and Corrective Actions
Issue: Delegated Discovery Request Error ID: OSCP-NPY-DISREQ-E004 HTTP Response Code: 500	This ID indicates that the NrfProxy failed to connect to the Worker to initiate the delegated discovery request towards NRF due to an exception other than TimeoutException, ConnectException, or UnknownHostException.	The delegated NF discovery request failed due to an unknown error at the NrfProxy service. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the worker is up and reachable.
Issue: Delegated Discovery Request Error ID: OSCP-NPY-DISREQ-E005 HTTP Response Code: 500	This ID indicates that the NrfProxy could not find the cache key, and as a result, was unable to process the delegated discovery request.	The cache key was not received from the SCP-Worker. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that the cache key is generated at the scp-worker and sent to the scp-nrfproxy service.
Issue: Delegated Discovery Request Error ID: OSCP-NPY-DISREQ-E006 HTTP Response Code: 500	This ID indicates that the NrfProxy could not find the cache for the delegated discovery response due to an exception encountered during JSON parsing.	An exception occurred while parsing the delegated NF discovery cached response into a JSON array. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that valid response data is cached in the scp-nrfproxy service.
Issue: Delegated Discovery Response Error ID: OSCP-NPY-DISRSP-E001 HTTP Response Code: 400	This ID indicates that an empty list of NF profiles was received in the delegated NF discovery response.	An empty list of NF profiles was received in the delegated NF discovery response. NF_DISCOVERY_FAILURE Corrective Actions The Consumer NF should send different values for the 3gpp-sbi-discovery-* headers to ensure that the delegated discovery returns a non-empty response.
Issue: Delegated Discovery Response Error ID: OSCP-NPY-DISRSP-E002 HTTP Response Code: 500	This ID indicates that no response was received for the delegated NF discovery.	No response was received for the delegated NF discovery. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that valid response data is received by the scp-nrfproxy service.
Error ID: OSCP-NPY-DISRSP-E003 HTTP Response Code: 500	This ID indicates that the NrfProxy failed to build the delegated NF discovery response.	Failed to build the delegated NF discovery response. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that valid response data is received by the scp-nrfproxy service for processing.
Issue: Delegated Discovery Response Error ID: OSCP-NPY-DISRSP-E004 HTTP Response Code: 500	This ID indicates that validation failed for the NF profiles received in the delegated NF discovery response.	Validation of the NF profiles received in the delegated NF discovery response failed. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that a response with valid NF profiles data is received by the scp-nrfproxy service.
Issue: Delegated Discovery Response Error ID: OSCP-NPY-DISRSP-E005 HTTP Response Code: 500	This ID indicates that there was a failure in deserializing the delegated NF discovery response.	Failed to deserialize the delegated NF discovery response. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that valid response data is properly cached in the scp-nrfproxy service.

Table 3-15 (Cont.) SCP NRF-PROXY MICROSERVICE

Error Details	Description	Possible Causes and Corrective Actions
Issue: Internal Server Errors Error ID: OSCP-NPY-INTRNL-E001 HTTP Response Code: 500	This ID indicates that the asynchronous call failed in the NrfProxy service for the delegated NF discovery request.	The asynchronous call for the delegated NF discovery request failed. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that valid response data is successfully received by the scp-nrfproxy service for processing.
Issue: Internal Server Errors Error ID: OSCP-NPY-INTRNL-E002 HTTP Response Code: 500	This ID indicates that the NrfProxy service failed to process the delegated NF discovery request due to an exception.	The NrfProxy service failed to process the delegated NF discovery request. UNSPECIFIED_NF_FAILURE Corrective Actions Ensure that valid response data is received by the scp-nrfproxy service and processed correctly.

Table 3-16 SCP NOTIFICATION MICROSERVICE

Error Details	Description	Possible Causes and Corrective Actions
Issue: Profile Validations Error ID: OSCP-NTF-PRFVLD-E001 HTTP Response Code: 400	This ID indicates that NF profile received from NRF is invalid as it contains both nfProfile and profileChange elements for NF_PROFILE_CHANGED event.	Problem Cause: The NF profile received from the NRF is invalid because it contains both nfProfile and profileChange for the NF_PROFILE_CHANGED event. INVALID_REQUEST_BODY Corrective Actions NRF should send only the profileChange attribute for the NF_PROFILE_CHANGED event.
Issue: Profile Validations Error ID: OSCP-NTF-PRFVLD-E002 HTTP Response Code: 400	This ID indicates that NF profile received from NRF is missing some mandatory parameters amongst event, nfType, nfStatus, and nInstanceid.	The NF profile received from the NRF is missing some mandatory parameters, including event, nfType, nfStatus, and nInstanceid. MANDATORY_IE_MISSING Corrective Actions NF profiles sent by NRF must include all mandatory fields.
Issue: Profile Validations Error ID: OSCP-NTF-PRFVLD-E003 HTTP Response Code: 400	This ID indicates that the NF profile received from NRF has an invalid JSON format.	The NF profile received from the NRF has an invalid JSON format. INVALID_MSG_FORMAT Corrective Actions NF profiles sent by NRF must contain valid JSON content.

3.11 Log Enhancement for 5G SBI Error Responses Generated by SCP

SCP generates error responses for all the routing attempts made on the producer NFs when SCP does not receive any response after performing alternate routing on all the available producer NFs. The ProblemDetails parameter of the error response contains the required pieces of information to find the cause of the error. For more information about error response enhancement, see [Error Response Enhancement](#).

With the introduction of the Log Enhancement for 5G SBI Error Responses Generated by SCP feature, error response logs have been enhanced to include information, such as sender of the response and the User Equipment (UE) identifier received from the 3gpp-Sbi-Correlation-Info

header, in the error logs. These details, along with the problem details, identify the cause of the error responses generated by SCP.

SCP generates error responses, and SCP-Worker generates error logs by adding additional attributes to the logs during the following scenarios:

- When there is no eligible producer NF available to route the message request.
- When all the routing attempts lead to request timeouts.
- When connection between SCP and producer NFs fails.
- When SCP disqualifies producer NFs because the Overload-Reduction-Metric value is less than 100.
- When SCP returns bad requests to consumer NFs due to discovery failure.
- When SCP returns error responses to consumer NF due to Access Token denial by NRF for a producer NF.

SCP-Worker adds additional log attributes, such as `errorStatus`, `errorTitle`, `errorDetails`, `errorCause`, and `sender`, to error logs to identify the cause of the error responses generated by SCP for WARN level logs. These attributes can be used to refine the search option to identify the cause of an error by analyzing any log on Kibana and Opensearch. These attributes are managed by the `additional_logging` REST API parameter as described in "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. By default, `additional_logging` is disabled. For more information about additional log attributes, see [Table 3-17](#).

Note

- This feature is not applicable if the log level is updated from the default WARN level to ERROR.
- The additional log attributes are added only to SCP-Worker logs.
- When CPU usage of SCP reaches Critical state, additional logging is not performed.
- The `errorDetails` attribute provides a summary of all the routing attempts made by SCP, whether the Error Response Enhancement feature is enabled or disabled.
- When `additional_logging` is enabled, SCP logs might spillover because repeated errors could be logged, leading to spillover and loss of other log information from other transactions. It is recommended to use log rate control or enable this feature only when required.

The following sample log contains additional attributes present in the error logs generated by SCP:

```
{"errorStatus":"504",  
  
  "errorTitle":"Transport failure at SCP",  
  
  "errorDetails":"ocscp-scp-worker.scpsvc.svc.cluster.local:Gateway Timeout  
for smf12svc.scpsvc.svc.cluster.local due to UnknownHostException:OSCP-WRK-  
ROUTE-E002",
```

```
"errorCause": "TARGET_NF_NOT_REACHABLE",

"sender": "SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"}
```

Subscriber ID (UE identifier) is added to all logs, irrespective of the log generated by SCP or any other component. It is derived from the subscriberId attribute of the log. The value of subscriberId is obtained from the 3gpp-Sbi-Correlation-Info header if it is present in the message request received from the consumer NF. Otherwise, subscriberId is automatically removed from the logs. For more information about 3gpp-Sbi-Correlation-Info, see *3GPP TS 29.500 v17.12.0*.

The subscriberId attribute is managed by the log_subscriber_info REST API parameter as described in "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. subscriberId is appended to all the SCP logs for that particular transaction if the 3gpp-Sbi-Correlation-Info header is present in the message request and log_subscriber_info is enabled.

① Note

- subscriberId is applicable only for SCP-Worker, SCP-nrfProxy, and SCP-nrfproxy-oauth logs.
- Any sensitive information in the form of a UE identifier (ex. SUPI) is published when log_subscriber_info is enabled. It is not recommended to enable this feature. You can secure the logs accordingly in the deployment environment when this feature is enabled.

Sample Logs

When both log_subscriber_info and additional_logging parameters are enabled:

```
{"instant":{"epochSecond":1716451983,"nanoOfSecond":70825540},
  "thread":"scp-wk-nrfproxy-downstream-19",
  "level":"WARN",

  "loggerName":"com.oracle.cgbu.cne.scp.router.common.logging.WorkerLogBuilder",
  "message":"Category: ROUTING, Event: ROUTING_MISCELLANEOUS, Details: SCP
Generated Error Details in Final Response to Consumer NF",

  "endOfBatch":false,"loggerFqcn":"org.apache.logging.log4j.spi.AbstractLogger",
  "threadId":927,"threadPriority":5,
  "messageId":"a5322c9c-f110-4b77-8665-ec54ee76dee4","scpFqdn":"ocscp-scp-
worker.scpsvc.svc.cluster.local","scpAuthority":"","

  "messageTimestamp":"2024-05-23T08:13:03.070+0000","application":"ocscp","micro
service":"scp-worker","engVersion":"24.2.0-OCSPF-23002-
elog-240522144106-181a1bc6",

  "mktgVersion":"24.2.0.0.0","vendor":"oracle","namespace":"scpsvc","node":"100.
77.4.253",
  "pod":"ocscp-scp-worker-6c5b88b795-
xlqgj","subsystem":"router","instanceType":"prod","processId":"1",
  "subscriberId":"imsi-345012123123123",
  "errorStatus":"500",
```

```
"errorTitle":"Internal Server Error",
"errorDetails":"ocscp-scp-worker.scpsvc.svc.cluster.local:Access Token
request failed due to transport error at NrfProxy-0auth service:OSCP-OAU-
TKNREQ-E002",
"errorCause":"UNSPECIFIED_NF_FAILURE",
"sender":"SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"}
```

When log_subscriber_info is disabled, but additional_logging is enabled:

```
{"instant":{"epochSecond":1716451983,"nanoOfSecond":70825540},
"thread":"scp-wk-nrfproxy-downstream-19",
"level":"WARN",

"loggerName":"com.oracle.cgbu.cne.scp.router.common.logging.WorkerLogBuilder",
"message":"Category: ROUTING, Event: ROUTING_MISCELLANEOUS, Details: SCP
Generated Error Details in Final Response to Consumer NF",

"endOfBatch":false,"loggerFqn":"org.apache.logging.log4j.spi.AbstractLogger",
"threadId":927,"threadPriority":5,
"messageId":"a5322c9c-f110-4b77-8665-ec54ee76dee4","scpFqdn":"ocscp-scp-
worker.scpsvc.svc.cluster.local","scpAuthority":"","

"messageTimestamp":"2024-05-23T08:13:03.070+0000","application":"ocscp","micro
service":"scp-worker","engVersion":"24.2.0-OCSPF-23002-
elog-240522144106-181a1bc6",

"mktgVersion":"24.2.0.0.0","vendor":"oracle","namespace":"scpsvc","node":"100.
77.4.253",
"pod":"ocscp-scp-worker-6c5b88b795-
xlqgj","subsystem":"router","instanceType":"prod","processId":"1",
"errorStatus":"500",
"errorTitle":"Internal Server Error",
"errorDetails":"ocscp-scp-worker.scpsvc.svc.cluster.local:Access Token
request failed due to transport error at NrfProxy-0auth service:OSCP-OAU-
TKNREQ-E002",
"errorCause":"UNSPECIFIED_NF_FAILURE",
"sender":"SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"}
```

Additional Log Attributes

The following table describes additional log attributes that are appended to the error logs:

Table 3-17 Additional Log Attributes

Attribute	Description
subscriberId	Indicates the User Equipment (UE) identifier and the value of this parameter is determined from the 3gpp-Sbi-Correlation-Info header in the message request. Example: "subscriberId": "imsi-345012123123123" Note: The value of subscriberId cannot be modified by SCP.
sender	This is SCP FQDN. Example: "sender":"SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"
errorStatus	Indicates the status code of the error response. Example: "errorStatus":"500"

Table 3-17 (Cont.) Additional Log Attributes

Attribute	Description
errorTitle	Indicates the error title of the error response. Example: "errorTitle":"Internal Server Error"
errorDetails	Indicates the error details of the error response. Example: "errorDetails":"ocscp-scp-worker.scpsvc.svc.cluster.local:Access Token request failed due to transport error at NrfProxy-Oauth service:OSCP-OAU-TKNREQ-E002"
errorCause	Indicates the error cause of the error response. Example: "errorCause":"UNSPECIFIED_NF_FAILURE"

Managing Log Enhancements

Enable

This feature is disabled at the time of SCP deployment. You can enable or disable this feature using the CNC Console as described in [Configuring the Log Enhancement Feature](#).

Configure

You can configure this feature using CNC Console and REST APIs.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring the Log Enhancement Feature](#).
- **Configure using REST APIs:** For information about configuring `additional_logging` and `log_subscriber_info` REST API parameters, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

There are no specific metrics and alerts required for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.12 NFProfile Processing Enhancements

In the previous releases, SCP did not support custom NF services. When SCP receives a notification from NRF about an NF profile that has 3GPP-defined supported NF services along with custom, unknown, or unsupported NF services, it will reject the whole NF profile. Therefore, routing rules were not generated for 3GPP-defined supported NF services when a custom, unknown, or unsupported NF service was present in the NF profile.


With this enhancement, whenever SCP receives a notification regarding an NF profile that includes 3GPP-defined supported NF services, custom, unknown, or unsupported NF services,

SCP ignores the presence of custom, unknown, or unsupported NF services within the NF profile. Routing rules are generated by SCP for 3GPP-defined SCP supported NF services that are present in the NF profile. Consequently, SCP enhanced the process of handling NF profiles by streamlining the routing process and ensuring efficient and reliable communication between NFs.

SCP can receive custom, unknown, or unsupported NF services in the NF profile for 3GPP-defined NF types in the following cases:

- Notification from NRF: This is within the scope of this feature.
- Audit functionality using NRF management or discovery service: This is within the scope of this feature.
- Response for delegated discovery from NRF: This is outside the scope of this feature.

Figure 3-2 Call Flow of NFProfile Processing

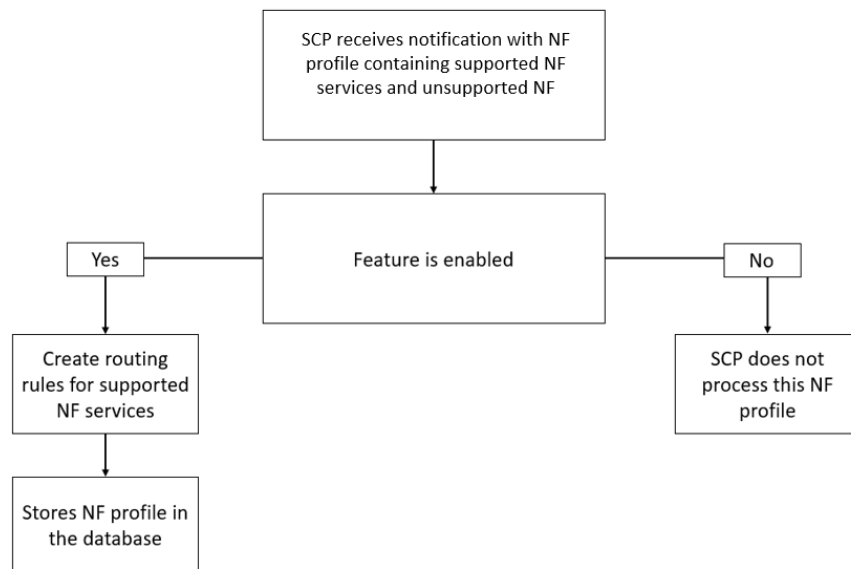

1. SCP receives a notification with an NF profile including 3GPP-defined supported NF services, custom, unknown, or unsupported NF services.
2. If the feature is enabled, then SCP creates routing rules for the 3GPP-defined supported NF services and ignores the custom, unknown, or unsupported NF services present in the NF profile.
3. SCP stores the NF profile in the database.
4. If the feature is disabled, then SCP does not process that NF profile and no routing rules will be created for that NF profile.
This call flow ensures that SCP appropriately handles notifications and routing rules procedures with supported NF services while disregarding unsupported services.

Managing NFProfile Processing Enhancements

Enable

You can enable this feature by setting the **ignore_unknown_nfservice** parameter to true. For more information, see [Configuring Enhanced NFProfile Processing](#)

Configure

You can enable this feature using the CNC Console or REST API.

- **Configure using CNC Console:** For more information about CNC Console configurations, see [Configuring Enhanced NFProfile Processing](#).
- **Configure using REST API:** For information about REST API configurations, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

- Added the `ocscp_ignore_unknown_service_total` metric in the [SCP Metrics](#) section.
- Added the [SCPIgnoreUnknownService](#) in the [Alerts](#) section.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.13 Support for cnDBTier APIs on the CNC Console

With the implementation of this feature, cnDBTier APIs are integrated into the CNC Console, and SCP users can view specific cnDBTier APIs, such as checking the cnDBTier version, status of cnDBTier clusters, and georeplication status on the CNC Console.

The following cnDBTier APIs are read only and can be viewed in CNC Console:

- **Backup List:** This API displays the details of stored backups, such as the ID and size of the backup.
- **cnDBTier Backup Status:** This API checks the cnDBTier backup status.
- **cnDBTier version:** This API displays the cnDBTier version.
- **Database Statistics Report:** This API displays the number of available database.
- **Georeplication Recovery:** This API provides the recovery status of georeplication for the cnDBTier cluster:
 - **Update Cluster As Failed:** This API is used to mark a disrupted cluster as failed.
 - **Start Georeplication Recovery:** This API is used to start the georeplication recovery process.
 - **Georeplication Recovery Status:** This API is used to monitor the recovery status of georeplication for both FAILED and ACTIVE cnDBTier sites.
- **Georeplication Status:**
 - **Real Time Overall Replication Status:** This API displays the overall replication status in multisite deployments. For example, in a four-site deployment, it provides the replication status between the following sites: site1-site2, site1-site3, site1-site4, site2-site3, site2-site4, and site2-site1. This is applicable for all other sites.

- Site Specific Real Time Replication Status: This API displays the site-specific replication status.
- Replication HeartBeat Status: This API displays the connectivity status between the local site and the remote site name to which SCP is connected.
- Local Cluster Status: This API displays the status of the local cluster.
- On-Demand Backup: This API displays the status of initiated on-demand backups.
- cnDBTier Health: This API displays the health status of the following services:
 - Replication Health Status: This API displays the health status of the replication service. It checks the following:
 - * if the replication service is up or not
 - * if the replication service can connect to database or not
 - Monitor Health Status: This API displays the health status of the monitor service. It checks the following:
 - * if the monitor service is up or not
 - * if the service can connect to database or not
 - * if the metrics are fetched or not (the metrics are fetched when the service is up and vice versa)
 - NDB Health Status: This API displays the health status of the NDB service pods like (data pods, sql pods, app-my-sql pods, mgmt pods). It checks the following:
 - * if the pod is connected to PVC or not
 - * if the pods status is up or not

Note

PVC Health Status attribute is set to NA when some of the database pods are not connected to the PVC.

- Backup Manager Health Status: This API displays the health status of the backup manager service. It checks the following:
 - * if the backup manager service is up or not
 - * if the service can connect to database or not

Managing cnDBTier APIs at CNC Console

Enable

This feature is enabled automatically when cnDBTier is configured as an instance during the CNC Console deployment. For more information about integrating cnDBTier APIs in CNC Console, see *Oracle Communications Cloud Native Core, cnDBTier User Guide*.

Configure

You can view cnDBTier APIs at CNC Console in the [Viewing cnDBTier APIs on the CNC Console](#) section.

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.14 NRF Configuration Using DNS SRV Resolution

Currently, SCP supports the static configuration (helm configuration) of NRF profiles from the `custom-values.yaml` file and uses them for registration, subscription, discovery, and audit.

With the introduction of this feature, SCP supports the configuration (RESTful) of NRF Service (SRV) FQDN at SCP. SCP uses this Domain Name System Service (DNS) SRV Resource record, known as Service Proto Name (SPN), to query the DNS server to locate the actual target NRF FQDNs (DNS SRV NRF FQDN). Thus, the user can configure primary (mandatory), secondary, and tertiary NRFs based on their priority and weights from different regions in the DNS server against a NRF SRV FQDN.

During migration, SCP deregisters and unsubscribes from static NRFs to update the NRF details stored statically at SCP with DNS SRV NRFs. Hence, it creates new rules for DNS SRV NRFs and deletes old static NRF rules. SCP instructs Audit microservice to perform an on-demand audit. The user can configure the DNS SRV and update all the data in the database for subscription, registration, discovery, and audit services. Configuration of different NRF SRV FQDN's with duplicate `nfsetIds` is not allowed. SCP allows users to configure multiple `nfsetIDs`, provided they are unique, but SCP will support only the 0th `nfsetID`.

To use the same `NFInstanceID` from the static NRF config, the following conditions must be met:

- The NF set ID should match
- NF service counts should match, and NF service FQDNs should also match

Hence, if the LCI comes from NRF against a different `nfinstanceID`, SCP will ignore the received LCI header as unknown.

NRFs are configured on the DNS server or stub against the NRF SRV FQDN. These NRFs should have PLMN IDs in the FQDN value matching the serving PLMN IDs of SCP. Setting the `isInterPLMnfqdn` to true will enable InterPLMN request routing coming from a foreign PLMN to SUT SCP. SCP will be able to perform intra-PLMN routing to local NRFs based on the `interplmnFQDN`. If `isInterPLMnfqdn` is set to false, the above-mentioned routing will not be performed if the Inter-PLMN request for Intra-PLMN routing is received with only `3gpp-Sbi-Target-apiRoot` and no additional information, such as a routing binding header.

Note

SCP never performs InterPLMN routing through SEPP for NRF as a destination, which is learned through DNSSRV.

Note

To avoid the loss of service, it is recommended that the user configure the same static target FQDN and `NFSetID` in the DNS SRV configuration, which are configured for Support for Model D and Support for OAuth2.0 Feature.

If the same target NRF FQDN is detected against different NRF SRV FQDNs, the `ocscp_configuration_dnssrv_nrf_duplicate_target_detected` metric is pegged, where the value of `nrfSrvFqdn` indicates the NRF SRV FQDN against which a duplicate target NRF is detected.

Managing NRF Configuration using DNS SRV Resolution

Enable

During deployment:

Set the `enableDnsBasedNrfBootStrapInfoFeature` to true and provide the NRF SRV Config under the `nrfSrvConfiguration` field of the deployment file to enable the DNS SRV NRF feature during fresh deployment.

Sample of changes in deployment file:

```
#-----NRF Bootstrapping based on DNS SRV-----#
#Enable/Disable nrf_bootstrap_info feature
  enableDnsBasedNrfBootStrapInfoFeature : false
  deRegisterScpDuringMigration: false

#Preferred DNSSRV NrfSetId to be used for on demand discovery when
nrf_bootstrap_info feature is enabled during deployment
  preferredDNSSRVNrfSetIdForOnDemandDiscovery:
["setnrfl1.nrfset.5gc.mnc012.mcc345"]

#Configure NRF Configuration using DNS SRV Resolution when the
nrf_bootstrap_info feature is enabled.
  nrfSrvConfiguration:
    - nrfSrvFqdn: nrf1svc.scpsvc.svc.cluster.local
      data:
        "v1":
          nfSetIdList:
            - "setnrfl1.nrfset.5gc.mnc012.mcc345"
          #plmnList:
          # - mcc: 330
          #   mnc: 143
          performSubscription: true
          performAudit: true
          registerScp: true
          scheme: http
          #apiPrefix: USEast
          versions:
            - apiVersionInUri: v1
              apiFullVersion: 1.0.0
          serviceNames:
            - nnrf-nfm
            - nnrf-disc
            - nnrf-oauth2
          isInterPlmnFqdn: false
```

For more information, refer *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

By default, this feature is disabled. You can use the `nrf_bootstrap_info` option to enable or disable NRF configuration using the DNS SRV resolution feature and its configurations as described in [Configuring NRF SRV](#).

Note

DNS SRV alternate routing feature should be enabled to enable NRF Configuration using DNS SRV Resolution feature.

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about configuring this feature, see the [Configuring NRF SRV](#) and [Mapping NFINstanceId and ServiceInstanceId](#) sections. To view the runtime status of NRF migration task, see the [Viewing SCP Feature Status](#) Status section.
- **Configure using REST API:**
You can configure this feature using REST APIs as described in "Configuring SCP Features", "SCP NRF SRV Configuration", and "SCP NRF FQDN InstanceId Mapping". You can view the runtime status of NRF migration task in the "Viewing SCP Feature Status" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_configuration_dnssrv_nrf_non_migration_task_failure_count_total`
- `ocscp_configuration_dnssrv_nrf_non_migration_task_success_count_total`
- `ocscp_configuration_dnssrv_nrf_non_migration_task_failure`
- `ocscp_configuration_dnssrv_nrf_migration_task_failure`
- `ocscp_configuration_dnssrv_nrf_duplicate_target_detected`

The following alerts are added in the [Alerts](#) section:

- [SCPDNSSRVNRFMigrationTaskFailure](#)
- [SCPDNSSRVNRFNonMigrationTaskFailure](#)
- [SCPDNSSRVNRFDuplicateTargetDetected](#)

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.15 Support for Kubernetes Resources

This section provides you with information about the Network Policies feature and the Pod Disruption Budget feature.

3.15.1 Support for Dual Stack

Using the dual stack mechanism, applications or NFs can establish connections with pods and services in a Kubernetes cluster using IPv4 or IPv6 or both simultaneously. Dual stack provides:

- coexistence strategy that allows hosts to reach IPv4 and IPv6 simultaneously.
- IPv4 and IPv6 allocation to the Kubernetes clusters during cluster creation. This allocation is applicable for all the Kubernetes resources unless explicitly specified during the cluster creation.

SCP can be deployed on CNE that supports dual stack networking. In case both IPv4 and IPv6 addresses are present in the IPADDRESS route group REST API configuration or NService's IPEndpoint, the load balancing mechanism is used to route the traffic between IPv4 and IPv6. For more information about IPADDRESS, see "Configuring Route Groups" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

SCP supports dual stack networking on the Aspen Service Mesh (ASM) setup so that SCP with sidecar can establish connections with pods and services using IPv4 or IPv6 or both simultaneously. For more information about enabling dual stack for ASM, see "Enabling Dual Stack Networking for ASM" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

IP Family Policy and IP Family Allocation for a Pod

The following table describes service IP allocation based on the Kubernetes cluster's IP family policy:

Table 3-18 IP Family Policy and IP Family Allocation for a Pod

serviceIpFamilyPolicy	serviceIpFamilies	Service IP Allocation	IP Allocation for a Pod
SingleStack	[IPv4]	Only IPv4 is allocated	Depends on the Kubernetes cluster IP family policy. If it is a single stack, only one IP address is allocated. If it is a dual stack, both IPv4 and IPv6 are allocated.
SingleStack	[IPv6]	Only IPv6 is allocated	
PreferDualStack/ RequireDualStack	[IPv4]/[IPv4,IPv6]	Both IPv4 and IPv6 addresses are allocated	
PreferDualStack/ RequireDualStack	[IPv6]/[IPv6,IPv4]		

SCP Behavior Based on Traffic Types and IP Types

The following table describes the behavior of SCP when the IP address allocation changes according to the traffic type:

Table 3-19 SCP Behavior Based on Traffic Types and IP Types

Service Configuration	Intra SCP Traffic Type	SCP Ingress Traffic Type	SBI Egress Traffic Type	SCP Behavior
• All services (Except SCP-Worker) – serviceIpFamilyPolicy=SingleStack – serviceIpFamilies=[IPv6] • SCP-Worker – serviceIpFamilyPolicy=SingleStack – serviceIpFamilies=[IPv6] • scpPreferEgressTrafficOnIPv6 = true/false • scpPreferInternalTrafficOnIPv6 = true/false	IPv6	IPv6	IPv6	• SCP intra-service communication: – All SCP services will be interacting with each other over IPv6. • Egress SBI Communication from SCP-Worker: – Any external traffic will be on IPv6 or IPv4 (if IPv6 unavailable) based on the upstream supported IPFamily. • Ingress SBI communication: – Any ingress traffic can be on IPv6 or IPv4 as both addresses are available for SCP-Worker. Value of scpPreferEgressTrafficOnIPv6 is NA as its used only for RequireDualstack Or PreferDualStack.
• All services (Except SCP-Worker) – serviceIpFamilyPolicy=SingleStack – serviceIpFamilies=[IPv4] • SCP-Worker – serviceIpFamilyPolicy=RequireDualStack or PreferDualStack – serviceIpFamilies=[IPv6, IPv4] • scpPreferEgressTrafficOnIPv6 = true • scpPreferInternalTrafficOnIPv6 = true/false	IPv4, IPv6	IPv6, IPv4	IPv6, IPv4	• SCP intra-service communication: – Ingress traffic for all the SCP services will be over IPv4 except SCP-Worker which can accept both IPv4 and IPv6. • Egress SBI Communication from SCP-Worker: – Any external traffic will be on IPv6 or IPv4 based on the upstream supported IPFamily. – IPv6 will be preferred in case both are available in DNS resolution. – If IP is considered from NFProfile, IP address present in the profile will be used irrespective of scpPreferEgressTrafficOnIPv6 value. * If only IPv4 is present profile, that is used. * If only IPv6 is present, that will be used. * If both are present, both are used in a round robin order. • Ingress SBI communication: – Any ingress traffic can be on IPv6 or IPv4 as both IPv6 and IPv4 addresses are available for SCP-Worker.

Table 3-19 (Cont.) SCP Behavior Based on Traffic Types and IP Types

Service Configuration	Intra SCP Traffic Type	SCP Ingress Traffic Type	SBI Egress Traffic Type	SCP Behavior
• All services (Except SCP-Worker) – <code>serviceIpFamilyPolicy=SingleStack</code> – <code>serviceIpFamilies=[IPv6]</code> • scpPreferInternalTrafficOnIPv6 = true/false • SCP-Worker – <code>serviceIpFamilyPolicy=RequireDualStack</code> or <code>PreferDualStack</code> – <code>serviceIpFamilies=[IPv6, IPv4]</code> or <code>[IPv4, IPv6]</code> • scpPreferEgressTrafficOnIPv6 = false	IPv6, IPv4	IPv6, IPv4	IPv6, IPv4	• SCP intra-service communication: – Ingress traffic for all the SCP services are over IPv6 except SCP-Worker, which can accept both IPv4 and IPv6. • Egress SBI Communication from SCP-Worker: – Any external traffic can be on IPv6 or IPv4 based on the upstream supported IPFamily. – IPv4 is preferred in case both are available in DNS resolution. Else, the one that is available will be used. • Ingress SBI communication: – Any ingress traffic can be on IPv6 or IPv4 as both IPv6 and IPv4 addresses are available for SCP-Worker.

Table 3-19 (Cont.) SCP Behavior Based on Traffic Types and IP Types

Service Configuration	Intra SCP Traffic Type	SCP Ingress Traffic Type	SBI Egress Traffic Type	SCP Behavior
• All services (Except SCP-Worker) – serviceIpFamilyPolicy=RequireDualStack or PreferDualStack – serviceIpFamilies=[IPv6, IPv4] or [IPv4, IPv6] • scpPreferInternalTrafficOnIPv6 = true • SCP-Worker – serviceIpFamilyPolicy=RequireDualStack or PreferDualStack – serviceIpFamilies=[IPv6, IPv4] or [IPv4, IPv6] • scpPreferEgressTrafficOnIPv6 = true	IPv4,IPv6	IPv6, IPv4	IPv6, IPv4	• SCP intra-service communication: – All the SCP services will be interacting with each other over either IPv4 or IPv6 (order undefined). (For Non-ASM environment) – All the SCP services will be interacting with each other over IPv6 (For ASM environment) – Any communication from SCP-Worker to any other SCP service will be on IPv6. • Egress SBI Communication from SCP-Worker: – Any external traffic will be on IPv6 or IPv4 based on the upstream supported IPFamily. – IPv6 is preferred in case both are available in DNS resolution. – If IP is being picked up from NFProfile, IP present in the profile will be used irrespective of the scpPreferEgressTrafficOnIPv6 value. * If only IPv4 is present in the profile, that is used. * If only IPv6 is present, that is used. * If both are present, both are used in a round robin order. • Ingress SBI communication: – Any ingress traffic will be on IPv6 or IPv4 as both IPv6 and IPv4 addresses are available for SCP-Worker.

Table 3-19 (Cont.) SCP Behavior Based on Traffic Types and IP Types

Service Configuration	Intra SCP Traffic Type	SCP Ingress Traffic Type	SBI Egress Traffic Type	SCP Behavior
All services (Except SCP-Worker) - serviceIpFamilyPolicy=SingleStack - serviceIpFamilies=[IPv4] scpPreferInternalTrafficOnIPv6 = true/false SCP-Worker - serviceIpFamilyPolicy=SingleStack - serviceIpFamilies=[IPv4] scpPreferEgressTrafficOnIPv6 = false/true	IPv4	IPv4	IPv4	- SCP intra-service communication: - All the SCP services will be interacting with each other over IPv4. - Egress SBI communication from SCP-Worker: - Any external traffic can be on IPv4 based on the upstream supported IPFamily. - Ingress SBI communication: - Any ingress traffic can be on IPv4 only because only IPv4 address is available for SCP-Worker. The value of scpPreferEgressTrafficOnIPv6 is NA as its used only for RequireDualstack or PreferDualStack.
All services (Except SCP-Worker) - serviceIpFamilyPolicy=SingleStack - serviceIpFamilies=[IPv6] scpPreferInternalTrafficOnIPv6 = true/false SCP-Worker - serviceIpFamilyPolicy=SingleStack - serviceIpFamilies=[IPv4] scpPreferEgressTrafficOnIPv6 = false/true	IPv6, IPv4	IPv4	IPv4	- SCP intra-service communication: - Ingress traffic for all the SCP services will be over IPv6 except SCP-Worker, which can accept only IPv4. - Egress SBI communication from SCP-Worker: - Any external traffic can be on IPv4 based on the upstream supported IPFamily. - Ingress SBI communication: - Any ingress traffic can be on IPv4 only because only IPv4 address is available for SCP-Worker. The value of scpPreferEgressTrafficOnIPv6 is NA as its used only for RequireDualstack or PreferDualStack.

Managing Dual Stack

Enable

To enable Dual Stack, perform a fresh installation of SCP. An upgrade from a single stack to a dual stack is not supported.

Configuring IpFamilyPolicy and IpFamilies

- To configure IpFamilyPolicy and IpFamilies, the following Helm parameters can be configured:
 - serviceIpFamilyPolicy.scpcAudit

- `serviceIpFamilyPolicy.scpcConfiguration`
 - `serviceIpFamilyPolicy.scpcSubscription`
 - `serviceIpFamilyPolicy.scpcNotification`
 - `serviceIpFamilyPolicy.scpcAlternateResolution`
 - `serviceIpFamilyPolicy.scpCache`
 - `serviceIpFamilyPolicy.scpNrfProxyOauth`
 - `serviceIpFamilyPolicy.scpNrfproxy`
 - `serviceIpFamilyPolicy.scpWorker`
 - `serviceIpFamilyPolicy.scpMediation`
 - `serviceIpFamilyPolicy.scpMediationTest`
 - `serviceIpFamilyPolicy.scpcLoadManager`
 - `serviceIpFamilies.scpcAudit`
 - `serviceIpFamilies.scpcConfiguration`
 - `serviceIpFamilies.scpcSubscription`
 - `serviceIpFamilies.scpcNotification`
 - `serviceIpFamilies.scpcAlternateResolution`
 - `serviceIpFamilies.scpCache`
 - `serviceIpFamilies.scpNrfProxyOauth`
 - `serviceIpFamilies.scpNrfproxy`
 - `serviceIpFamilies.scpWorker`
 - `serviceIpFamilies.scpMediation`
 - `serviceIpFamilies.scpMediationTest`
 - `serviceIpFamilies.scpcLoadManager`
 - `serviceSpecifications.workerServices.ipFamilyPolicy`
 - `serviceSpecifications.workerServices.ipFamilies`
 - `serviceSpecifications.workerServices.publicSignalingIPv6`
 - `serviceSpecifications.workerServices.publicSignalingIPv6Specified`
 - `scpPreferEgressTrafficOnIPv6`
2. To configure IPv4 or IPv6 used for constructing callback URI for NF profile notification from NRF, use the following parameter:

`serviceSpecifications.scpSubscriptionInfo.ip`
 3. To configure NRF profiles with ipEndpoints having either IPv4 or IPv6 or both IPv4 and IPv6, use the following parameter:

`nrfProfiles.nfServices.ipEndpoints`

For more information about above mentioned Helm parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Observe

The `ocscp_worker_5gsbi_upstream_connect_failure_total` metric is added in the [Metrics](#) section.

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.15.2 Network Policies

Network Policies are an application-centric construct that allows you to specify how a pod communicates with various network entities. It creates pod-level rules to control communication between the cluster's pods and services, and to determine which pods and services can access one another inside a cluster.

Previously, the pods under deployment can be contacted by any other pods in the Kubernetes cluster without any restrictions. Now, Network Policy provides namespace-level isolation, which allows secured communications to and from SCP with rules defined in respective Network Policies. The network policies enforce access restrictions for all the applicable data flows except communication from Kubernetes node to pod for invoking container probe. For example, SCP internal microservices cannot be contacted directly by any other pods; The scp-workers in the data plane have special privileges to communicate with other NFs. Pods in the control plane can communicate with other pods only within their namespace.

Managing Support for Network Policies

Enable

To use this feature, network policies need to be applied to the namespace wherein SCP is applied.

Configure

You can configure this feature using Helm. For information about Configuring Network Policies for SCP Deployment, see *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

Observe

There are no specific metrics and alerts required for the Network Policy feature.

3.15.3 Pod Disruption Budget

PodDisruptionBudget (PDB) is a Kubernetes resource that helps to achieve the high availability of scalable application services in voluntary disruptions performed by cluster administrators to manage the cluster nodes. It is defined for highly available and scalable SCP services such as scp-worker, scp-cache, and scp-nrfproxy microservices. PDB restricts the number of pods of a highly available application that are down simultaneously from voluntary disruptions, and allows safe eviction of pods when a node is drained of pods to perform maintenance. The

`maxPdbUnavailable` parameter is specified in the Helm chart to determine the maximum number of pods that can remain unavailable during a voluntary disruption.

Managing Pod Disruption Budget

Enable

This feature is enabled automatically if you're deploying SCP with release 16.

Configure

You can configure this feature using Helm. For information about configuring PDB, see *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

Observe

There is no specific metrics and alerts required for the Support of PDB functionality.

3.15.4 SCP Microservices and Probes

SCP microservices use Kubernetes probes to monitor and manage the SCP application's initialization, health, and status. These are HTTP probes that provide a mechanism to identify the health status of the application. This probing occurs on a regular basis at a fixed interval, and appropriate action is taken if the probes fail.

The Kubernetes probes are as follows:

- **Liveness probes:** These probes allow you to evaluate whether an application that is running in a container is in a healthy state. If not, Kubernetes terminates the container, and the container is subjected to its restart policy.
If a container doesn't provide a liveness probe, the default state is success.
- **Readiness probes:** These probes continuously verify whether a container is ready to serve requests. If the probe returns a failed state, Kubernetes removes the IP address for the pod from the endpoints of all services.
The default state of readiness before the initial delay is failure. If a container doesn't provide a readiness probe, the default state is success.

A pod is deemed ready when all of its containers have reached a state of readiness. The use of the signal is to regulate the selection of pods that serve as backends for services. When a pod is in an unready state, it's removed from the load balancer service. The stable support of the readiness probe has been available since the release of Kubernetes 1.0.

- **Startup probes:** These probes verify whether an application within a container has started. All other probes are disabled if a startup probe is provided until it succeeds, and if a container fails this probe, the container is terminated and follows the restart policy for the pod.
This can be used to adopt liveness checks on slow-starting containers, avoiding them getting killed by the kubelet before they're up and running. The stable support of the startup probe has been available since the release of Kubernetes 1.0.

The following table describes the probes used by SCP microservices and their details.

Table 3-20 SCP Microservices and Startup Probes

SCP Microservice	Startup Probe Support	Startup Probe Condition	Startup Probe Configuration	Action on Failure
SCP-Worker	Yes	If all of the conditions listed below are met, the starting probe succeeds; otherwise, the probe fails: - Routing rules received from the Notification microservice. - Routing options received from Configurations - The following data objects are received from the Configuration microservice: - WORKER_POD_OVERLOAD_ACTION_POLICY - WORKER_POD_OVERLOAD_CTRL_POLICY - WORKER_POD_OVERLOAD_DISCARD_POLICY - SERVICE_SPECIFICATIONS - SCP_NF_PROFILES - SCP_FEATURES - LOCAL_NF_AUTH2_REQUIRED - ACCESS_TO_KEN_GRANULARITY_CONFIG - The scp-worker is able to access the scp-cache if rate limiting is enabled.	- Initial delay: 35s - Probe interval: 2s - Failure threshold: 5	Pod Restart

Note

Startup probes are only implemented for SCP_worker as of the current release.

Table 3-21 SCP Microservices and Readiness Probes

SCP Microservice	Readiness Probe Support	Readiness Probe Condition	Readiness Probe Configuration	Action on Failure
SCP-Worker	Yes	The scp-worker service is marked as ready if all the below conditions are met; otherwise, it is marked as not ready: - Routing rules received from the Notification microservice. - Routing options received from Configurations - The following data objects are received from the Configuration microservice: - WORKER_POD_OVERLOAD_ACTION_POLICY - WORKER_POD_OVERLOAD_CTRL_POLICY - WORKER_POD_OVERLOAD_DISCARD_POLICY - SERVICE_SPECIFICATIONS - SCP_NF_PROFILES - SCP_FEATURES - LOCAL_NF_OAUTH2_REQUIRED - ACCESS_TO_KEN_GRANULARITY_CONFIG - The scp-worker is able to access the scp-cache if rate limiting is enabled.	- The readiness probe starts after the startup probe is successful. - Initial delay: 1s - Probe interval: 2s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes

Table 3-21 (Cont.) SCP Microservices and Readiness Probes

SCP Microservice	Readiness Probe Support	Readiness Probe Condition	Readiness Probe Configuration	Action on Failure
SCP-nrfproxy	Yes	The SCP-nrfproxy service is marked as ready if all the below conditions are met; otherwise, it is marked as not ready. - Check if the NRF configuration is available and can be read from the NRF Profiles table in the cnDBtier service. - Check if the list of prioritized NRFs is available as per preference.	- Initial delay: 30s - Probe interval: 10s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes
SCP-loadManager	Yes	The readiness probe for the SCP-loadManager service returns false during application initialization, and after the application is initialized, it starts returning the true value.	- Initial delay: 5s - Probe interval: 2s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes
SCP-nrfProxy-Oauth	Yes	The readiness probe for the scp-nrfproxy-oauth service returns false during application initialization, and after the application is initialized, it starts returning the true value.	- Initial delay: 5s - Probe interval: 2s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes
SCP-Cache	Yes	The scp-cache service is marked as ready if the below conditions are met; otherwise, it is marked as not ready. Check if application maps in scp-cache service are initialized.	- Initial delay: 5s - Probe interval: 2s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes

Table 3-21 (Cont.) SCP Microservices and Readiness Probes

SCP Microservice	Readiness Probe Support	Readiness Probe Condition	Readiness Probe Configuration	Action on Failure
SCPC-Notification	Yes	The scpc-notification service is marked as ready if the below conditions are met; otherwise, it is marked as not ready. - Check whether the following tables have been created and populated: - SCP_NF_PROFILES - NRF_NF_DETAILS - CANARY_RELEASES - ROUTING_OPTIONS - SYSTEM_OPTIONS - VIRTUAL_SERVICES - SERVICE_ENTRIES	- Initial delay: 30s - Probe interval: 10s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes
SCPC-Audit	Yes	The scp-audit service is marked as ready if the below condition is met; otherwise, it is marked as not ready. Check if the NRF configuration is available and can be read from the NRF Profiles table in the cnDBtier service.	- Initial delay: 30s - Probe interval: 10s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes
SCPC-Configuration	Yes	The scpc-configuration service is marked as ready if the below conditions are met; otherwise, it is marked as not ready. Check if the cnDBtier service is accessible and the required DB tables are available or created.	- Initial delay: 30s - Probe interval: 10s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes

Table 3-21 (Cont.) SCP Microservices and Readiness Probes

SCP Microservice	Readiness Probe Support	Readiness Probe Condition	Readiness Probe Configuration	Action on Failure
SCPC-Subscription	Yes	The scpc-subscription service is marked as ready if all the below conditions are met; otherwise, it is marked as not ready. Check if the cnDBteir service is accessible and if NRF and SCP profiles are available or created in the cnDBteir service.	- Initial delay: 30s - Probe interval: 10s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes
SCPC-Alternate-resolution	Yes	The scpc-alternate resolution service is marked as ready if all the below conditions are met; otherwise, it is marked as not ready. - Check if the cnDBtier service is accessible and if DNS SRV configuration for alternate route groups is available or created in the cnDBtier service. - Validate if system options are synced from the scpc-configuration service.	- Initial delay: 30s - Probe interval: 10s - Failure threshold: 5	Pod is marked as not ready, and hence its endpoint will not be created. As a result, the pods become inaccessible. For more information see, Readiness probes

Table 3-22 SCP Microservices and Liveness Probes

SCP Microservice	Liveness Probe Support	Liveness Probe Condition	Liveness Probe Configuration	Liveness Action on Failure
SCP-Worker	Yes	- Threadwatchdog controls the Liveness probe. - ThreadWatchDog monitors all the threads running in the pod at a fixed interval. - If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.	- The liveness probe starts after the startup probe is successful. - Initial delay: 1s - Probe interval: 2s - Failure threshold: 5	Pod restart

Table 3-22 (Cont.) SCP Microservices and Liveness Probes

SCP Microservice	Liveness Probe Support	Liveness Probe Condition	Liveness Probe Configuration	Liveness Action on Failure
SCP-nrfproxy	Yes	- Threadwatchdog controls the Liveness probe. - ThreadWatchDog monitors all the threads running in the pod at a fixed interval. - If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.	- Initial delay: 180s - Probe interval: 2s - Failure threshold: 5	Pod restart
SCP-loadManager	Yes	- Threadwatchdog controls the Liveness probe. - ThreadWatchDog monitors all the threads running in the pod at a fixed interval. - If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.	- Initial delay: 180s - Probe interval: 2s - Failure threshold: 5	Pod restart
SCP-nrfProxy-Oauth	Yes	- Threadwatchdog controls the Liveness probe. - ThreadWatchDog monitors all the threads running in the pod at a fixed interval. - If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.	- Initial delay: 180s - Probe interval: 2s - Failure threshold: 5	Pod restart
SCP-Cache	Yes	The liveness probe for scp-cache always returns true.	- Initial delay: 180s - Probe interval: 2s - Failure threshold: 5	N/A

Table 3-22 (Cont.) SCP Microservices and Liveness Probes

SCP Microservice	Liveness Probe Support	Liveness Probe Condition	Liveness Probe Configuration	Liveness Action on Failure
SCPC-Notification	Yes	- Threadwatchdog controls the Liveness probe. - ThreadWatchDog monitors all the threads running in the pod at a fixed interval. - If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.	- Initial delay: 180s - Probe interval: 2s - Failure threshold: 5	Pod restart
SCPC-Audit	Yes	- Threadwatchdog controls the Liveness probe. - ThreadWatchDog monitors all the threads running in the pod at a fixed interval. - If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.	N/A	Pod restart
SCPC-Configuration	Yes	- Threadwatchdog controls the Liveness probe. - ThreadWatchDog monitors all the threads running in the pod at a fixed interval. - If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.	N/A	Pod restart

Table 3-22 (Cont.) SCP Microservices and Liveness Probes

SCP Microservice	Liveness Probe Support	Liveness Probe Condition	Liveness Probe Configuration	Liveness Action on Failure
SCPC-Subscription	Yes	- Threadwatchdog controls the Liveness probe. - ThreadWatchDog monitors all the threads running in the pod at a fixed interval. - If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.	N/A	Pod restart
SCPC-Alternate-resolution	Yes	- Threadwatchdog controls the Liveness probe. - ThreadWatchDog monitors all the threads running in the pod at a fixed interval. - If threadwatchdog identifies that a thread is stuck, then the liveness probe is marked as failed.	N/A	Pod restart

3.15.5 Horizontal Pod Autoscaler

You can use the Kubernetes Horizontal Pod Autoscaler to automatically scale the number of pods in a deployment, replication controller, replica set, or stateful set, based on that resource's CPU or memory utilization or on other metrics. Using Horizontal Pod Autoscaler, applications can be scaled out to meet increased demands or scaled in when resources are no longer required. You can set a target metric percentage for Horizontal Pod Autoscaler to meet when scaling applications. For more information about Horizontal Pod Autoscaler, see <https://kubernetes.io/docs/tasks/run-application/horizontal-pod-autoscale/>.

A new service pod accepts new HTTP2 connection requests when the pod status is "Ready". Otherwise, the new HTTP2 connection requests are distributed among service pods with the status "Ready". After an HTTP2 connection is established, the 5G SBI messages are routed on the same established HTTP2 connection with a particular service pod. So, when a service pod is restarted or a new pod is spawned due to an upgrade or scaling, the newly created service pod starts accepting new HTTP2 connection requests from the consumer NFs, and the existing HTTP2 connections will continue to manage traffic. If any existing connection is terminated due to idle timeout or any other reason, and when the consumer NF initiates a new connection attempt, this connection can be established with any existing or new service pod with the status "Ready". To avoid scaling in and scaling out of the SCP service pods, it is recommended to have minimum and maximum replica count for the rated capacity of the SCP deployment. For more information about replica count, see "Resource Requirements" in *Oracle*

Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide.

Managing Horizontal Pod Autoscaler

Enable

This feature is automatically enabled in SCP at the time of deployment.

Configure

There are no specific configurations required for this feature.

Observe

There are no specific metrics and alerts required for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.16 SCP Response Timeout Extension

Previously, users could configure a response timeout interval of up to 15 seconds for receiving a response from SCP.

The SCP Response Timeout Extension feature enhances the SCP's capability to manage network requests more effectively, ensuring consistent service even when Producer NFs require additional processing time.

The enhanced feature allows users to extend the maximum response timeout to 50 seconds. This improvement provides configuration options to handle response timeouts for NFs that require more time to serve a request.


The SCP allows users to configure a maximum timeout of up to 50 seconds for receiving responses from the Producer NF. If the response is not received within this timeframe, the SCP will automatically initiate rerouting to an available alternate NF or pod.

The SCP monitors the total forwarded request rate, specifically targeting requests with response times exceeding 50 seconds. A single SCP deployment supports up to 200 messages per second (MPS) for all NF Service-Based Interface (SBI) traffic through multiple interfaces. An alert is raised when the traffic exceeds 200 MPS and the response delay from the Producer NF takes more than 50 seconds.

Call Flow

The following call flow diagram illustrates the scenario:

Figure 3-3 Call Flow for SCP Response Timeout Extension

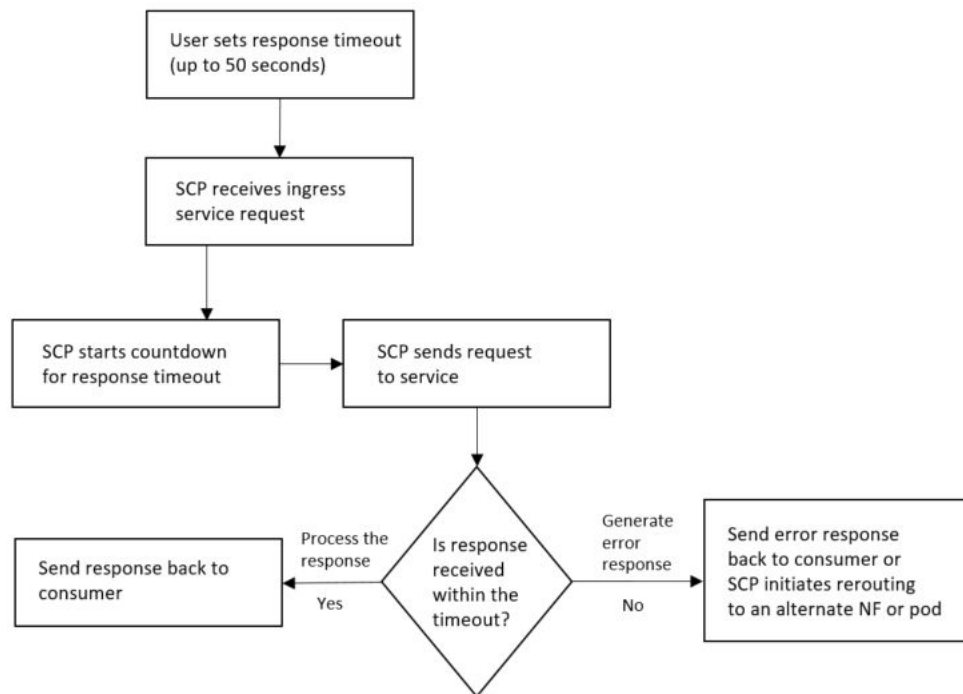

1. The user sets the response timeout with a maximum limit of up to 50 seconds for a service.
2. SCP receives the ingress service request for the same service and starts the countdown for the response timeout before sending the request out.
3. SCP checks if the response is received within the timeout period:
 - a. If the response is received within the timeout, SCP will process the response and send it back to the Consumer NF.
 - b. If not, SCP will generate its own error response and send it back to the Consumer NF.
4. If SCP receives more than 200 responses with a response time of 50 seconds or greater from the Producer NF, SCP will generate an alert.

Managing SCP Response Timeout in Routing Option Configuration

Enable

This feature is enabled automatically at the time of SCP deployment.

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Routing Options](#).
- **Configure using REST APIs:** For more information about configuring REST APIs, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

- The `ocscp_metric_upstream_service_time_total` metric is updated with new buckets for response timeout in the [Metrics](#) section.
- Added [SCPHighResponseTimeFromProducer](#) alert in the [Alerts](#) section.

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.17 Overload Control Based on the Overload Control Information Header

SCP, SEPP, producer NFs, and consumer NFs get overloaded when they operate beyond their signaling capacity. An enhancement is required to include Overload Control Information (OCI) in 5G Service Based Interface (SBI) messages to convey the overload capacity of NFs to their peers.

Using the Overload Control Based on the Overload Control Information Header feature, SCP, SEPP, consumer NFs, and producer NFs can gracefully reduce their incoming signaling traffic by conveying consumer NFs to reduce sending service requests or by conveying producer NFs to reduce sending notification requests, respectively, so that these entities or peer NFs can process the traffic according to their configured capacities. After receiving the 3gpp-Sbi-Oci header from consumer NFs, producer NFs perform the signaling reduction toward the consumer NF only for the notifications or callback requests according to the overload scope and not for any NF services that may be produced by the same NF.

Depending on SCP's configuration, SCP can:

- send its load information in the OCI header with reduction metrics based on the REST API configuration.
- reduce traffic toward the peer based on the OCI received from a peer.

OCI is conveyed within the 3gpp-Sbi-Oci header. When SCP, SEPP, consumer NF, or producer NF experiences overload conditions, it sends overload condition information, scoped to an NF instance or an NF service instance, through the 3gpp-Sbi-Oci header, which is tagged along with the messages to peers.

OCI contains Overload Timestamp, Overload-Reduction-Metric, Period-of-Validity, and Scope attributes in the 3gpp-Sbi-Oci header.

A sample format of the 3gpp-Sbi-Oci header for an NF instance is as follows:

```
Timestamp: "Mon, 04 Dec 2023 08:49:37 GMT"; Period-of-Validity: 75s; Overload-Reduction-Metric: 50%; NF-Instance: 54804518-4191-46b3-955c-ac631f953ed8
```

The following table describes attributes of the 3gpp-Sbi-Oci header format:

Table 3-23 3gpp-Sbi-Oci Header Attributes

Attribute	Description
Timestamp	Indicates the time when the OCI was generated. This attribute is used by the OCI recipient such as peers or SCP, to decide whether the newly received OCI is the same as the previously received OCI or different. The OCI recipient can overwrite any stored OCI for a peer NF, NF set, NF service, NF service set, Callback URI, SCP, or SEPP with the newly received OCI if the new OCI is more recent than the previously stored OCI. Example: Timestamp: "Mon, 04 Dec 2023 08:49:37 GMT".
Period-of-Validity	Indicates the duration during which the overload condition specified by the 3gpp-Sbi-Oci header is considered valid until overridden by subsequent new OCIs. Example: Period-of-Validity: 75s.
Overload-Reduction-Metric	Indicates the percentage of traffic reduction requested by the OCI sender to the OCI recipient. This value can range from 0 to 100. Example: Overload-Reduction-Metric: 50%.
Scope	Indicates the message requests or notification requests to which the OCI is applicable. It identifies the traffic that the OCI sender requests the receiver to process in accordance with the OCI. Example: NF-Instance: 54804518-4191-46b3-955c-ac631f953ed8. List of supported olcScope in the OCI header at SCP: • nfProducerScope – NF-Instance – NF-Service-Instance • nfConsumerScope – Callback-Uri – NF-Instance – NF-Service-Instance – NF-Instance and Service-Name • scpScope – SCP-FQDN • seppScope – SEPP-FQDN

Conveyance of OCI

The following scenarios explain the conveyance of OCI:

Peer OCI Enforcement

SCP performs OCI enforcement based on the OCI header received from the peer and the REST API configuration.

When a peer NF is overloaded, it sends OCI to SCP so that SCP can throttle the traffic destined for that peer NF. Based on the `ociEnforcementAction` REST API parameter configuration, SCP can perform reselection to another equivalent peer NF or directly send an error response to the peer consumer NF. SCP relays the OCI received from the peer NF to other peer NFs based on the `relayPeerOci` REST API parameter configuration as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. For example, if the Overload-Reduction-Metric attribute of the OCI header is 10%, the producer NF conveys SCP to reduce the message rate by 10%. If SCP has 100 messages to be routed to that producer NF, SCP will route 90 messages to the target producer NF. To process the pending 10 messages, SCP can perform reselection and route the messages to another equivalent NF or send an error response to the consumer NF based on the `ociEnforcementAction` REST API parameter.

After the expiry of peer OCI Period-of-Validity attribute, SCP can continue sending traffic toward the peer immediately or incrementally based on the `ociTrafficRecoveryPolicy` REST API parameter.

Self-OCI Generation and Conveyance

SCP conveys its overload control information, which is known as self-OCI, with its peer NFs when SCP is overloaded.

The overload condition of SCP is determined by the CPU utilization of all SCP-Worker pods. SCP is overloaded when the average CPU utilization of all the pods exceeds the configured OCI threshold levels.

When SCP is overloaded, SCP generates OCI based on the threshold levels such as WARN, MINOR, MAJOR, and CRITICAL, configured using the `ociThresholdConfig` REST API parameter as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. SCP sends the self-generated OCI only when there is any message to be routed to the peer NF.

SCP starts conveying OCI to peers when it gets overloaded based on the configured threshold level. OCI is conveyed for the following scenarios:

- When OCI threshold changes: Whenever SCP's traffic load changes resulting in OCI threshold changes, SCP creates a new OCI based on the current threshold level configuration values and current timestamp.
- When the Period-of-Validity attribute expires: When the Period-of-Validity attribute of the last sent OCI expires, SCP creates a new OCI based on the current threshold level configuration values and current timestamp.
- Periodically: After every `scpOciConveyanceInterval` interval, SCP sends the same OCI that was sent last time to the peer NF.

Managing Overload Control Information

Enable

By default, this feature is disabled. You can use the `oci` option to enable or disable this feature as described in [Configuring SCP Features](#).

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see
 - [Configuring OCI](#)
 - [Configuring OCI Threshold Levels](#)
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features", "Configuring Overload Configuration Information Threshold" and "Configuring Overload Configuration Information" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_peer_oci_conveyance_total`
- `ocscp_worker_oci_conveyance_total`
- `ocscp_worker_oci_enforced_total`

- `ocscp_worker_rx_unsupported_oci_scope_total`
- `ocscp_metric_nf_oci_rx_total`

The following metrics are added in the [Alerts](#) section:

- [ScpSelfOCIThresholdAboveWarn](#)
- [ScpSelfOCIThresholdAboveMinor](#)
- [ScpSelfOCIThresholdAboveMajor](#)
- [ScpSelfOCIThresholdAboveCritical](#)

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.18 Support for HTTPS

Hypertext Transfer Protocol Secure (HTTPS) is an extension of Hypertext Transfer Protocol (HTTP). HTTPS establishes a secure connection between Network Functions (NFs) in a 5G network and uses Transport Layer Security (TLS) to encrypt the communication protocols.

With the support of HTTPS connections, SCP accepts secured ingress connection requests from a consumer NF and establishes a secured egress connection with a producer NF. HTTPS provides confidentiality and integrity protection to 5G Service Based Interface (SBI) messages.

SCP processes 5G SBI messages over HTTPS connection based on the `sbiProxySslConfigurations` parameter configuration as specified in the `custom-values.yaml` file. For more information, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*. The `sbiProxySslConfigurations` configuration authorizes both ingress and egress connections from consumer NFs and producer NFs, respectively with SCP.

SCP supports a single and multiple TLS certificates to enable HTTPS as described in [TLS Certificate Configuration Enhancement](#). SCP supports two-way TLS authentication for HTTPS connections and accesses Certificate Authority (CA) from Kubernetes secret.

Note

- This feature supports HTTPS for inter-NF communication but not intra-NF communication, that is, communication between two microservices within SCP.
- SCP supports both HTTP and HTTPS concurrently. You can select to expose service IP for HTTP, HTTPS, or both.
- This feature supports TLSv1.2 and TLSv1.3.

Managing Support for HTTPS

Enable

This feature is enabled by setting the following Helm parameters in the `custom-values.yaml` file:

- Enabling HTTPS for ingress connections:
 - For Release 16 deployment: The `scpProfileInfo.scpInfo.scpPorts.https` parameter enables SCP to establish ingress connection with consumer NFs. You must set the `https` port to the same value as the `publicSignallingPortHttps` parameter. Example of NF Service for HTTPS:

```
# - serviceInstanceId: f86b54b7-aef9-4c78-b346-3bfb7f380813
#   serviceName: nscp-5g-sbi-proxy
#   fqdn: <scprel>-scp-worker.scpsvc.svc.cluster.local
#   scheme: https
#   priority: 0 # Default value is 0
#   capacity: 100 # Default value is 100
#   load: 0
#   nfServiceStatus: REGISTERED
#   ipEndpoints:
#     - ipv4Address: 10.104.121.240 # this IP should be same as
#       "publicSignalingIPHttps" of SCP mentioned above.
#       port: '9443' # this port should be same as
#       "publicSignalingPortHttps" of SCP mentioned above.
#   apiPrefix: # Ignored in SCP processing
#   versions: # Ignored in SCP processing, but kept for
#             registering with NRF
#   - apiFullVersion: 1.0.0
#     apiVersionInUri: v1
```

- Enabling HTTPS for egress connections: The `nativeEgressHttpsSupport` parameter must be set to `true` to enable SCP to establish a connection with producer NFs over HTTPS. By default, this value is set to `false`. If this value is set to `false`, then all the connections with producer NFs are established through HTTP.

For more information about above mentioned parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

① Note

- You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 26.1.201 to 26.1.201.
- TLS certificates for both egress and ingress are mandatory when enabling HTTPS.

Configure

`sbiProxySslConfigurations` and `ddSslConfiguration` Helm parameters are introduced as part of this feature. To use this feature, complete the configuration as described in "Global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Observe

The `ocscp_metric_ssl_certificate_expire_total` metric is updated in the [Metrics](#) section.

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.18.1 TLS Certificate Configuration Enhancement

SCP uses Hypertext Transfer Protocol Secure (HTTPS) to establish secured ingress and egress connections with consumer NFs and producer NFs, respectively. These communication protocols are encrypted using Transport Layer Security (TLS).

In SCP 23.2.0, SCP used to support a single TLS certificate configuration to enable HTTPS.

From 23.3.0, this enhancement enables SCP to configure different Transport Layer Security (TLS) certificates on ingress and egress interfaces. It also allows users to provide primary and secondary certificates for each interface.

Multiple TLS certificates can be configured across the following communication interfaces:

- Egress connections on 5G Service Based Architecture (SBA): SCP acts as a client while sending message requests to producer NFs, producer SCP-P, or NRF. For example:
 - A consumer 'SCP-C' sends health check request to a producer 'SCP-P'.
 - SCP forwards notifications to consumer NFs.
 - SCP forwards Service, Discovery, or Access Token requests to NRF or producer NFs.
- Ingress connections on 5G SBA: SCP acts as a server to process message requests received from consumer NFs, SCP-C, or NRF. For example:
 - SCP-P receives health check request from SCP-C.
 - SCP receives notifications from NRF or NF producer.
 - SCP receives service or health check requests from consumer NFs.
- Oracle Communications Network Analytics Data Director (OCNADD) connection on message feed: SCP acts as a client toward OCNADD on message feed interfaces, for example, SCP sends message feed data to OCNADD.

Note

You can use a single or multiple TLS certificates to enable HTTPS.

If the primary TLS certificate expires or is about to expire, SCP switches to an alternate or secondary TLS certificate. If there is no alternate TLS certificate configured, SCP uses a single certificate to enable HTTPS. At each communication interface such as ingress, egress, and OCNADD, you can configure the `caBundle` Helm parameter to manage the Certificate Authority (CA) bundle. The CA can be the same or different at these interfaces. For example, CA signing the TLS certificate at the ingress communication interface can be the same or different from the CA at the egress communication interface.

Note

It is recommended to maintain multiple TLS certificates with overlapping expiry time to avoid service interruption during certificate expiry. For example, if the primary certificate validity is changed from T0 and T1, then the validity of the secondary certificate must be changed from T0 to T2 so that when the primary certificate expires, the secondary certificate gets activated within the expiry period of the primary certificate, where, $T0 < T1 < T2$.

By default, SCP uses a single TLS certificate to enable HTTPS. To enable support for multiple TLS certificates, you can modify the `sbiProxySslConfigurations` Helm parameter configurations for ingress and egress connections and the `ddSslConfiguration` Helm parameter for OCNADD connections.

SCP uses the Helm parameters `sslCertExpiryMinorThreshold`, `sslCertExpiryMajorThreshold`, and `sslCertExpiryCriticalThreshold` to set up minor, major, and critical alerts for TLS certificate expiration. These alerts are triggered at the specified times to signal the impending expiry of the certificates.

SCP provides the `terminateTLSConnsOnCertExpiry` Helm configuration at the egress communication interface to determine whether to terminate or maintain the existing HTTPS connections when the configured TLS certificate is updated or renewed. When the TLS certificate expires, then SCP:

- maintains the existing HTTPS connections that were using the expired certificates.
- creates new HTTPS connections which uses the updated or renewed TLS certificate.

For more information about configuring Helm parameters for multiple TLS certificates, see "Global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

3.18.2 Support for TLS

SCP uses Hypertext Transfer Protocol Secure (HTTPS) to establish secure connections with consumer NFs and producer NFs, respectively. These communication protocols are encrypted using Transport Layer Security (TLS).

TLS comprises the following components:


- **Handshake Protocol:** Exchanges the security parameters of a connection. Handshake messages are supplied to the TLS record layer.
- **Record Protocol:** Receives the messages to be transmitted, fragments the data into multiple blocks, secures the records, and then transmits the result. Received data is delivered to consumer NFs and producer NFs.

This feature enables the support for TLS 1.3 to all consumer NFs, producer NFs, the Data Director, SBI Interfaces, and any interfaces previously supporting TLS 1.2. Support for TLS 1.2 will remain available.

TLS 1.2 and TLS 1.3 Handshake

This section describes the differences between TLS 1.3 and TLS 1.2, as well as the advantages of TLS 1.3 over TLS 1.2 and earlier versions.

Figure 3-4 TLS 1.2 and TLS 1.3 Handshake

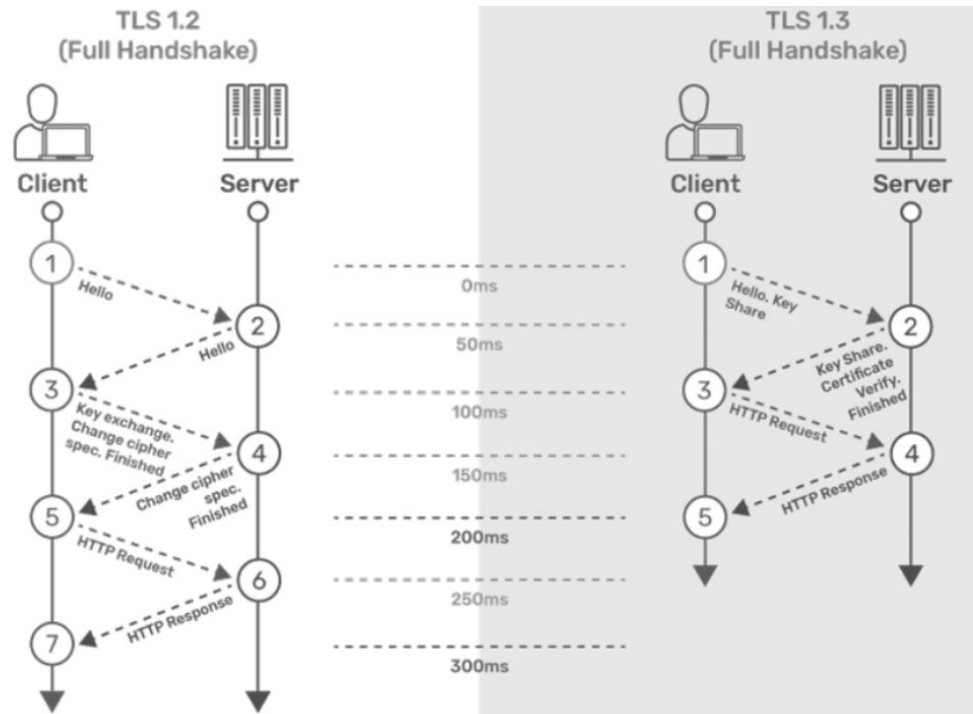**TLS 1.2**

Step 1: The connection or handshake starts when the client sends a "client hello" message to the server. This message consists of cryptographic information such as supported protocols and cipher suites. It also contains a random value or random byte string.

Step 2: To respond to the "client hello" message, the server sends a 'server hello' message. This message contains the CipherSuite that the server has selected from the options provided by the client. The server also sends its certificate, along with the session ID and another random value.

Step 3: The client verifies the certificate sent by the server. When the verification is complete, it sends a byte string encrypted using the public key of the server's certificate.

Step 4: When the server receives the secret, both the client and server generate a master key along with session keys (ephemeral keys). These session keys are used for symmetrically encrypting the data.

Step 5: The client sends an "HTTP Request" message to the server to enable the server to transition to symmetric encryption using the session keys.

Step 6: To respond to the client's "HTTP Request" message, the server does the same and switches its security state to symmetric encryption. The server concludes the handshake by sending an HTTP response.

Step 7: The client-server handshake is completed in two round trips.

TLS 1.3

Step 1: The connection or handshake begins when the client sends a "client hello" message to the server, which includes the list of supported cipher suites and the client's key share for the specific key agreement protocol.

Step 2: To respond to the "client hello" message, the server sends the key agreement protocol that it has chosen. The "Server Hello" message includes the server key share, server certificate, and the "Server Finished" message.

Step 3: The client verifies the server certificate, generates keys since it has the server's key share, and then sends the "Client Finished" message along with an HTTP request.

Step 4: The server completes the handshake by sending an HTTP response.

Comparison Between TLS 1.3 and TLS 1.2

The following table provides the comparison of TLS 1.3 and TLS 1.2:

Table 3-24 Comparison of TLS 1.3 and TLS 1.2

Feature	TLS 1.3	TLS 1.2
TLS Handshake	- The initial handshake involves the exchange of key shares, ensuring cryptographic security. - A typical handshake in TLS 1.3 involves the exchange of up to 3 packets, thereby facilitating quicker and more responsive connections.	- The initial handshake occurs in clear text. - A typical handshake in TLS 1.2 involves a more extended process, typically requiring 5-7 packets for completion, resulting in slower connection establishment times.
Cipher Suites and Privacy	- Improving security by narrowing the selection of cipher suites, which streamlines configuration and reduces errors. Supported algorithms are free from known vulnerabilities, thus making the cipher suites more secure. - TLS_AES_128_GCM_SHA256 - TLS_AES_256_GCM_SHA384 - TLS_CHACHA20_POLY1305_SHA256	- Supporting a wide range of cipher suites that are vulnerable to attacks results in less secure cipher suites. - TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 - TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 - TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256 - TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 - TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 - TLS_ECDHE_ECDSA_WITH_CHACHA20_POLY1305_SHA256
Round-Trip Time	Efficient session resumption modes, such as Zero Round Trip Time (0-RTT), enable clients to resume sessions without additional round trips. Data can be transmitted in the initial message using Pre-Shared Keys (PSK), further enhancing the efficiency of the communication process.	TLS 1.2 does not support a 0-RTT mode for resuming sessions with reduced round-trip time.
Perfect Forward Secrecy (PFS)	TLS 1.3 supports Provide Forward Secrecy (PFS). PFS ensures that each session key is entirely independent of long-term private keys, which are used over an extended period for decrypting encrypted data.	TLS 1.2 does not provide PFS.
Performance	The handshake process is optimized to reduce latency by minimizing the number of required round trips, resulting in a more responsive connection.	The handshake process involves multiple round trips between the client and server, may result in increased latency and a less responsive connection.

TLS 1.3 handshake offers the following improvements over earlier versions:

- The symmetric encryption algorithms are removed and Authenticated Encryption with Associated Data (AEAD) algorithms are supported.
- In TLS 1.3, all handshake messages after the ServerHello are encrypted.
- A zero round-trip time (0-RTT) mode is added in the handshake process, enabling fewer round trips compared to TLS 1.2. Additionally, it utilizes cryptographic algorithms that are faster.
- Static Rivest-Shamir-Adleman (RSA) and Diffie-Hellman cipher suites are removed, ensuring that all public-key-based key exchange mechanisms now Provide Forward Secrecy (PFS).
- TLS 1.3 has better security than TLS 1.2, addressing known vulnerabilities in the handshake process.
- TLS 1.3 eliminates data compression.
- Version Downgrade Protection in TLS 1.3 is a security mechanism that prevents attackers from using an older, potentially less secure version of the TLS protocol. This protection is achieved through the exchange of a "Finished" message between the client and server, which includes a Message Authentication Code (MAC) covering all preceding handshake messages. This mutual verification process ensures that negotiated parameters remain unaltered by potential attackers. This helps ensure that connections are established using the latest, most secure version of TLS available, reducing the risk of vulnerabilities associated with older protocol versions.

Managing Support for TLS

Enable

If you want to use TLS 1.3, perform the following procedure:

1. In the `custom_values.yaml` file, configure the following Helm parameters:
 - `sbiProxySslConfigurations.server` to `TLSV1_3`
 - `sbiProxySslConfigurations.client[0]` to `TLSV1_3`

Note

By default, the helm parameter is set to TLS 1.3,TLS 1.2.

2. Add the following ciphers to the `cipherSuitesTlsV1_3` parameter:
 - `TLS_AES_128_GCM_SHA256`
 - `TLS_AES_256_GCM_SHA384`
 - `TLS_CHACHA20_POLY1305_SHA256`

Using TLS for OCNADD

By default, SCP uses a single TLS certificate to enable HTTPS. To enable support for multiple TLS certificates, you can modify the `sbiProxySslConfigurations` Helm parameter configurations for ingress and egress connections and the `ddSslConfiguration` Helm parameter for OCNADD connections.

Using TLS 1.2

If you want to use only TLS 1.2, perform the following procedure:

1. In the `custom_values.yaml` file, configure the following Helm parameter:

- `sslEnabledProtocol` to TLSv1.2

Note

By default, the `helm` parameter is set to TLS 1.3

2. Add the following ciphers to the `cipherSuitesTlsV1_2` parameter:
 - TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384
 - TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384
 - TLS_ECDHE_RSA_WITH_CHACHA20_POLY1305_SHA256
 - TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256
 - TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256
 - TLS_ECDHE_ECDSA_WITH_CHACHA20_POLY1305_SHA256

Configure

You can configure this feature using Helm. For information about Helm configurations, see "Global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_https_ingress_connection_success_total`
- `ocscp_worker_https_ingress_connection_failure_total`
- `ocscp_worker_https_egress_connection_success_total`
- `ocscp_worker_https_egress_connection_failure_total`
- `ocscp_metric_ssl_certificate_expire_total`

The following alerts are added in the [Alerts](#) section:

- [SCPWorkerSSLCertificateOnCriticalExpiry](#)
- [SCPWorkerSSLCertificateOnMajorExpiry](#)
- [SCPWorkerSSLCertificateOnMinorExpiry](#)
- [SCPIngressConnectionEstablishmentFailure](#)
- [SCPEgressConnectionEstablishmentFailure](#)

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.18.3 Support for Automated Certificate Lifecycle Management

In SCP 23.3.x and earlier releases, X.509 and Transport Layer Security (TLS) certificates were managed manually. When multiple instances of SCP were deployed in a 5G network, certificate management, such as certificate creation, renewal, removal, and so on, was tedious and error-prone.

Using the Support for Automated Certificate Lifecycle Management feature, you can integrate SCP with OCCM to support automation of certificate lifecycle management. OCCM manages TLS certificates stored in Kubernetes secrets by integrating with Certificate Authority (CA) using the Certificate Management Protocol Version 2 (CMPv2) protocol. OCCM obtains and signs TLS certificates and stores them in Kubernetes secrets of SCP namespace. For more information about OCCM, see *Oracle Communications Cloud Native Core, Certificate Management User Guide*.

Using this feature, you can monitor, create, recreate, and renew TLS certificates based on their validity. For information about creating Kubernetes secrets, see "Configuring SSL or TLS Certificates to Enable HTTPS" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

3.19 Support for HTTP2 Header

To improve efficiency across converged networks and optimize 5G core traffic, 3GPP-defined headers at the SCP have been introduced.

3.19.1 Support for 3GPP Timestamp Related Headers

The 3GPP TS 29.500 and TS 29.502 specifications define several headers that are used by 5G Core Network Functions (NFs) to manage timeouts, delays, and responses in 5G Core NFs. These headers provide critical information about the timing of requests and the expected responses.

Prerequisite: Time synchronization between NFs and the SCP, as well as among SCP services, is required for this feature to function properly.

The following are the three types of headers and their functionality:

- **3gpp-Sbi-Sender-Timestamp:** This header indicates the exact time, with millisecond granularity, at which an HTTP request or response was initiated by the sender. This timestamp is crucial for tracking when the request was sent, enabling the measurement of signaling delays between different NF service instances within the network.
For example: 3gpp-Sbi-Sender-Timestamp: Sun, 04 Aug 2019 08:49:37.845 GMT
- **3gpp-Sbi-Origination-Timestamp:** This header captures the exact time, with millisecond granularity, when the originating entity (such as initial NF) initiated the HTTP request.
For example: 3gpp-Sbi-Origination-Timestamp: Sun, 04 Aug 2019 08:49:37.845 GMT
- **3gpp-Sbi-Max-Rsp-Time:** This header specifies the maximum duration, in milliseconds, that the sender is willing to wait for a response after sending the request.
For example: 3gpp-Sbi-Max-Rsp-Time: 10000

This feature allows SCP to calculate the response timeout and total transaction lifetime by using the 3GPP-defined SBI Timestamp headers included in the SBI request messages.

When the Timestamp Header Support and Dynamic Response Timeout features are enabled, the SCP will consistently add or modify the 3gpp-Sbi-Sender-Timestamp and 3gpp-Sbi-Max-Rsp-Time headers. However, it will not modify the 3gpp-Sbi-Origination-Timestamp, as this

header represents the original sender's timestamp. The SCP updates the 3gpp-Sbi-Sender-Timestamp to the current time before forwarding the request and adjusts the 3gpp-Sbi-Max-Rsp-Time to reflect the remaining time that the SCP will wait for a response.

Upon receiving a request with both the 3gpp-Sbi-Sender-Timestamp and 3gpp-Sbi-Max-Rsp-Time headers, SCP checks whether the request has already timed out.

For the first routing attempt, the ResponseTimeout is determined by taking the minimum value between the ConfiguredResponseTimeout and the RemainingTimeBudget.

- **Configured Timeout:** The maximum timeout value configured for the service request. This refers to the 'responseTimeout' value configured in the Routing Config Set. For more information, see the "Routing Config Set" in the *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **RemainingTimeBudget:** The amount of time left for the request to be processed is based on the maximum allowable response time (3gpp-Sbi-Max-Rsp-Time) minus the time that has already passed and the downstream response transit time.

```
ResponseTimeout = minimum(
    ConfiguredResponseTimeout, RemainingTimeBudget )
```

The calculation of the timeout value for the 3GPP-defined SBI Timestamp headers also considers the network transit time required to send the SBI response back to the downstream NF, SCP or SEPP in roaming scenarios. This network transit time is configurable. If the user does not wish to include downstream transit time in the above calculations, they can set the relevant value to 0. For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

① Note

In an inter-SCP case (when an SCP routes a request to another SCP), no alternate routing occurs in the consumer SCP, except in the case of a connection failure. Therefore, use Consumer SCP to allocate the full RemainingTimeBudget as the ResponseTimeout to the next-hop SCP, even if a secondary SCP is available.

SCP will allocate the entire remaining time budget for the last routing attempt:

```
ResponseTimeout = RemainingTimeBudget
```

Timestamp Header Combinations and SCP Behavior

For this feature to function correctly, it is expected to receive the 3gpp-Sbi-Max-Rsp-Time header and the 3gpp-Sbi-Sender-Timestamp and/or 3gpp-Sbi-Origination-Timestamp headers in the request. However, if the expected headers are not received, SCP will forward the routing request and apply the existing routing behavior.

The following table summarizes the various combinations of the 3GPP SBI Timestamp headers and the corresponding behavior of the SCP when forwarding or processing SBI requests:

Table 3-25 Timestamp Header Combinations and SCP Behavior

3gpp-Sbi-Max-Rsp-Time	3gpp-Sbi-Sender-Timestamp	3gpp-Sbi-Origination-Timestamp	Feature Enabled and Dynamic Response Timeout = True	Feature Enabled and Dynamic Response Timeout = False and Update Timestamp Headers = True
Yes	Yes	Yes	Applies the feature as outlined above.	Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers
Yes	Yes	No	Applies the feature as outlined above.	Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers
Yes	No	Yes	Applies the feature as outlined above.	Adds or Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers
Yes	No	No	Applies the feature with the assumption that the 3gpp-Sbi-Sender-Timestamp reflects the timestamp at which SCP receives the request at the ingress.	Adds or Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers
No	Yes	Yes	Applies the existing routing behavior, SCP will use the configured values to set the total transaction timeout and response timeouts, and adds or updates the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers.	Adds or Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers
No	Yes	No	Applies the existing routing behavior, SCP will use the configured values to set the total transaction timeout and response timeouts, and adds or updates the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers.	Adds or Updates 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers

Table 3-25 (Cont.) Timestamp Header Combinations and SCP Behavior

3gpp-Sbi-Max-Rsp-Time	3gpp-Sbi-Sender-Timestamp	3gpp-Sbi-Origination-Timestamp	Feature Enabled and Dynamic Response Timeout = True	Feature Enabled and Dynamic Response Timeout = False and Update Timestamp Headers = True
No	No	Yes	Applies the existing routing behavior, SCP will use the configured values to set the total transaction timeout and response timeouts, and adds or updates the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers.	Applies existing behavior. SCP does not add the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers.
No	No	No	Applies the existing routing behavior, SCP will use the configured values to set the total transaction timeout and response timeouts, and adds or updates the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers.	Applies existing behavior. SCP does not add the 3gpp-Sbi-Max-Rsp-Time and 3gpp-Sbi-Sender-Timestamp headers.

Note

If any of the expected headers is malformed, the SCP will not reject the request and will instead fall back to the existing routing behavior.

Managing 3GPP Timestamp Related Headers**Enable**

To enable this feature, you must set the Timestamp Header Support option to true as described in [Configuring SCP Features](#).

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring 3GPP Timestamp Headers Support](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_transaction_time_exhausted_total`
- `ocscp_worker_timestamp_headers_validation_fail_total`
- `ocscp_nrfproxy_transaction_time_exhausted_total`
- `ocscp_oauth_transaction_time_exhausted_total`

This feature depends on accurate time synchronization between network functions (NFs) and the SCP. If the time between them is not synchronized, it can result in request routing failures due to incorrect calculations of timeout values.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.19.2 Support for Multiple 3gpp-Sbi-Binding Headers

SCP enhanced its capabilities to support multiple 3GPP-SBI-binding headers within a single Service-Based Interface (SBI) message. In accordance with the support for additional standard HTTP2 headers specified in 3GPP TS 29.500, the SCP routes SBI request and response messages that contain multiple 3GPP-SBI-binding headers. It ensures the headers in the messages are forwarded to the producer exactly as received, without any additional processing or interpretation of the headers. The request and response messages includes:

- Notification messages
- Service messages

The feature supports the following header formats:

- Simple key-value pairs: `k=v1`, `k=v2`
- Array format: `k=[v1,v2]`

This feature is applicable to both Model C and Model D call flows and is implemented for the R16 deployment only.

Managing Support for Multiple 3gpp-Sbi-Binding Headers

Enable

Not applicable

Configure

Not applicable

Observe

There are no specific metrics and alerts required for the Multiple 3gpp-Sbi-Binding Headers.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.19.3 Support for 3gpp-Sbi-Custom-UDR-Nf-Group-Id

When an NF sends a SBI message request or response with the custom header, 3gpp-Sbi-Custom-UDR-Nf-Group-Id, SCP sends the message request or response, including the custom header, to the target NF.

Managing 3gpp-Sbi-Custom-UDR-Nf-Group-Id Header Support at SCP

Enable

This feature doesn't require a flag to be enabled or disabled and is enabled by default.

Configure

There's no specific configuration required for this feature.

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.20 Enhanced NF Status Processing

In older SCP releases, SCP removes routing rules when SCP receives an NFProfile with the SUSPENDED status.

With the enhanced NF Status Processing feature, Service Communication Proxy (SCP) provides the following 5G Service Based Interface (SBI) message request routing modes when an NFProfile is in the SUSPENDED state:

- Mode 1: SCP does not route message requests to producer NFs that are in the SUSPENDED state.
- Mode 2: SCP routes the message request to the target producer NF even if it is in the SUSPENDED state.
- Mode 3: SCP routes the message request to producer NFs that are in the SUSPENDED state only if alternate REGISTERED producer NFs are unavailable.

① Note

When an NFProfile is SUSPENDED, it remains in the SUSPENDED state for an infinite duration unless NRF marks it as REGISTERED, or it gets DE-REGISTERED.

In case of Mode 2 routing, when SCP receives a 5G SBI message request from a consumer NF, SCP considers all NFs that are configured using the `suspendedStateRouting` REST API parameter to route the message request.

In case of Mode 3 routing, when SCP receives a 5G SBI message request from a consumer NF, if the target producer NF is `SUSPENDED`, SCP routes the message to the first alternate producer NF, which is in the `REGISTERED` state. If the alternate `REGISTERED` producer NF is unavailable or responds with an error response, SCP routes the message request to the next available producer NF, which is in the `REGISTERED` state.

After exhausting all the routing attempts on `REGISTERED` producer NFs, if alternate routing attempts are available, SCP routes the message request to the `SUSPENDED` producer NFs if the `enhanced_nf_status_processing.enhancedSuspendedStateRouting` REST API parameter is set for a particular NF type. Otherwise, SCP returns the same error response to the consumer NF that it received due to the routing attempted on the last producer NF. SCP determines the target producer NF using the "3gpp-Sbi-Target-apiRoot" header and NF Set ID in the message request.

Note

You must not configure the same NF type for `enhancedSuspendedStateRouting` and `suspendedStateRouting` for both Mode 2 and Mode 3.

Managing Enhanced NF Status Processing

Enable

You can enable this feature using the CNC Console as described in [Configuring SCP Features](#).

Configure

You can enable and configure one of the following routing modes of this feature:

- Mode 1: Set `enhanced_nf_status_processing` to `false`.
- Mode 2: Set `enhanced_nf_status_processing` to `true` and configure `suspendedStateRouting`.
- Mode 3: Set `enhanced_nf_status_processing` to `true` and `enhancedSuspendedStateRouting` must be present.

For more information about the above mentioned REST API parameters, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about metrics, see [Metrics](#).

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).


3.21 Location Header for Host Mismatch

According to 3GPP, a consumer NF is expected to use the received "Location" header content while sending subsequent message requests. After receiving a subsequent request, consumer SCP extracts the producer NF details from the API prefix in the "3gpp-Sbi-Target-Apiroot" header and selects an appropriate inter-SCP path to route the request.

SCP matches the authority (FQDN or IP) in "Location" header of the "201 Created" response with the producer's authority (FQDN or IP) where the message request was sent. If the FQDN or IP in the response is different, producer SCP provides the producer's NF details as an API prefix in the "Location" header of the "201 Created" response. If the FQDN or IP is the same, the "Location" header does not perform any modification.

This feature has been introduced to correct inter-SCP routing in the above scenario.

Figure 3-5 Initial and Subsequent Request Routing Supported at SCP

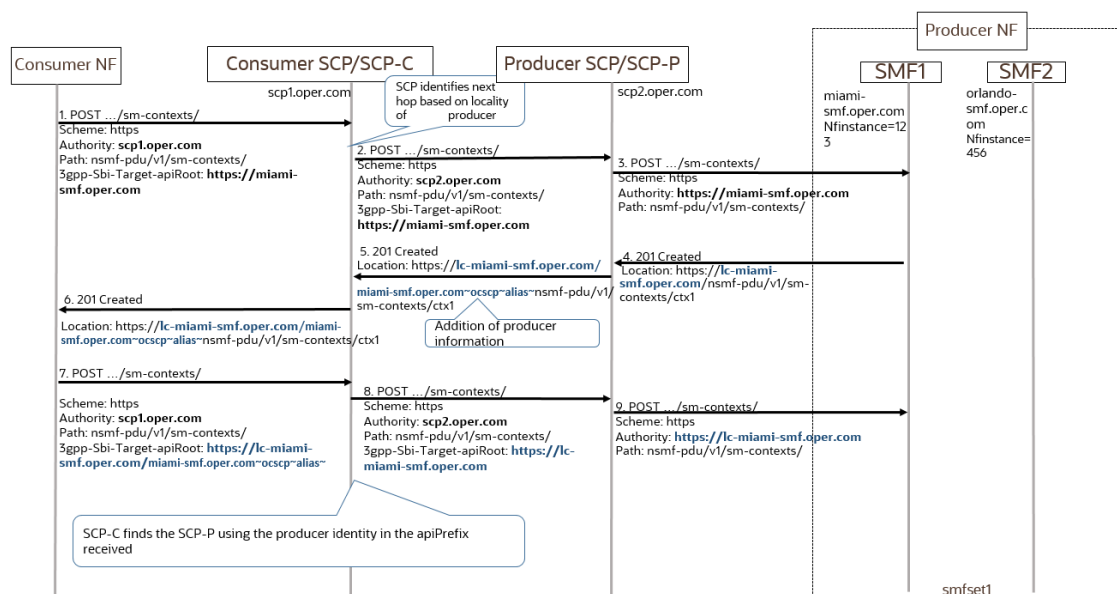

Managing Location Header for Host Mismatch

Enable

By default, this feature is disabled. To enable this feature, you must set the `location_hdr_update_for_host_mismatch` option to true as described in [Configuring SCP Features](#).

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about configuring this feature, see [Configuring SCP Features](#) to enable the location header update for host mismatch feature.
- **Configure using REST API:**
Previously, SCP used to support the above scenario through a Helm configuration in `values.yaml` using the `fqdnAliasingEnabled` field. Now a REST API parameter, `location_hdr_update_for_host_mismatch`, is introduced to enable this feature.

For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.22 Support for the Client Credentials Assertion Header

The 3GPP introduced Client Credentials Assertion (CCA) enables the NRF or the producer NF to authenticate the consumer NF when using indirect communication through SCP. The CCAs are JSON web tokens and are secured with digital signatures based on JSON Web Signature (JWS). The consumer NF adds the 3gpp-Sbi-Client-Credentials header containing the CCA. The CCA contains the following:

- The NF instance ID of the consumer NF (subject)
- A timestamp (iat) and an expiration time (exp)
- The NF type of the expected audience, such as the NRF type or the NF type of the producer NF

The consumer NF digitally signs the generated CCA based on its private key. The signed CCA contains one of the following fields:

- The X.509 URL (x5u) to refer to a resource for the X.509 public key certificate or certificate chain used for signing the client authentication assertion
- The X.509 Certificate Chain (x5c) includes the X.509 public key certificate or certificate chain used for signing the client authentication assertion

Note

SCP supports the 3gpp-Sbi-Client-Credentials header with x5c - X.509 URL, not x5u - X.509 URL.

Table 3-26 CCA Contents

Claim	Description
audience (aud)	NF type of the producer NF whose services are requested and/or NRF
expiration time (exp)	Timestamp of CCA expiration
subject (sub)	NF instance ID of consumer NF
timestamp (iat)	Timestamp of CCA generation
Security details used for signing CCA	• x5u - X.509 URL that refers to a resource for the X.509 public key certificate or certificate chain • x5c - X.509 Certificate Chain includes the X.509 public key certificate or certificate chain

The NRF, or producer NF, performs the CCA verification. It verifies that the public key certificate used to sign the CCA contains the same NF instance ID as the consumer's NF instance ID in the CCA. If the verification of the CCA fails at the receiving entity, a "403" response is returned with the cause attribute set to CCA_VERIFICATION_FAILURE.

If some rouge consumer NF acquires a valid CCA from some other consumer NF and uses it as its own CCA, then the CCA validation by the NRF or producer NF creates a security gap. Therefore, additional CCA validations on SCP are needed to mitigate this security impact. The NF instance ID of the NFs in the CCA must match the NF instance ID in the certificate used in the TLS connection by the consumer NF as part of the SCP validations.

Managing Client Credentials Assertion Header

Enable

By default, this feature is disabled. To enable this feature, you must complete the configuration as described in the following configuration section.

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about configuring this feature, see:
 - [Configuring SCP Features](#) to enable the CCA Header Validation feature
 - [Configuring Error Profile](#) to edit the error profiles
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features" and "Configuring Error Profile" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_cca_validation_failed_total`
- `ocscp_worker_cca_validation_feature_enabled_without_https`
- `ocscp_worker_cca_validation_performed_total`

Added the SCPCcaFeatureEnabledWithoutHttps alert in the [Alerts](#) section.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.23 Support for 5G SBI Message Correlation using the 3gpp-Sbi-Correlation-Info Header

The 3gpp-Sbi-Correlation-Info header contains correlation information, User Equipment (UE) identity that is used by an operator in various offline network management, performance

analysis, and troubleshooting tools and applications to identify messages (requests, responses, subscriptions, and notifications) related to a particular subscriber.

In this header, the UE identifier used is Subscription Permanent Identifier (SUPI), and the SUPI type is an International Mobile Subscriber Identity (IMSI). For example, 3gpp-Sbi-Correlation-Info: imsi-345012123123123

SCP efficiently routes message requests, along with the 3gpp-Sbi-Correlation-Info header, to the designated producer NFs. In cases where the correlation header is absent in the response from the target producer NF, SCP forwards the response to the consumer NF while appending the same 3gpp-Sbi-Correlation-Info header received in the request message. Additionally, when the correlation header is present in the request message and SCP generates an error response, SCP includes the correlation header in the response to the consumer NF. This ensures smooth and consistent correlation of 5G SBI messages throughout the system.

SCP adds the correlation header in the following cases if the request from the consumer contains this header:

- Access token requests toward NRF received from Model-C consumer NF.
- Discovery requests or access token requests toward NRF received in service request for delegated discovery in Model-D.
- During alternate routing.
- All the transaction in SCP is forwarded with correlation header toward traffic feed server to save the data in Traffic Feed OCNADD.

Managing Support for 3gpp-Sbi-Correlation-Info Header

Enable

Not applicable

Configure

Not applicable

Observe

There is no specific metrics and alerts required for the Support for 3gpp-Sbi-Correlation-Info Header.

3.24 SCP Health Check API

In the previous release, consumer NFs used to send Service Based Interface (SBI) message requests to SCP without checking the status of SCP because there was no health check mechanism implemented at SCP.

Using the SCP Health Check Application Programming Interface (API) feature, consumer NFs can determine the health status of SCP before forwarding any SBI message request to SCP. This feature allows consumer NFs or SCP-C, which is a consumer SCP, to perform the following health check verification on SCP:

- SCP Reachable: Determines if SCP is reachable through the transport path.
- SCP Available: Determines if SCP is available to provide responses to SBI message requests.

Note

- This feature supports HTTP/2
- Health check fails if either of the above mentioned requirements is not achieved.

SCP provides the RESTful health check service Uniform Resource Identifier (URI) (`{scpapiRoot}/{apiVersion}/status`) to consumer NFs to confirm its availability to process the message requests. Consumer NFs can use the following URI to get the status of SCP:

- Method: OPTIONS
- Resource URIs:
 - `<scheme>://<Scp-worker Fqdn>:<Port>/{apiVersion}/status`
 - `<scheme>://<Scp-worker Fqdn>:<Port>/{apiPrefix}/{apiVersion}/status`

This feature facilitates consumer NFs to determine the health status of SCPs by sending the health query request to SCPs. Based on the health query response, consumer NFs decide whether to send SBI message requests to that SCP or perform reselection and send requests on other healthy SCP.

SCP uses the following process to provide its health status to a consumer NF:

1. When SCP receives a health query request, it calculates its overall average load by considering the load of each SCP-Worker instance present in that SCP.
2. SCP compares the overall average load with the configured values of the `avgScpLoadThresholdValue` REST API parameter as described in "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
3. If the overall average load value is more than the value of `avgScpLoadThresholdValue`, SCP is considered as unhealthy and SCP sends error responses to the consumer NF based on the `healthCheckErrorProfile` parameter as described in "Configuring Error Profiles" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
4. If the overall average load value is less than or equal to the value of `avgScpLoadThresholdValue`, SCP is considered as healthy and SCP sends one of the following responses to the consumer NF based on the configuration:
 - **200WithPayload:** Sends 200 OK response code with the overall average load information of SCP.
 - **200WithEmptyPayload:** Sends 200 OK response code without the overall average load information of SCP.
 - **204WithNoContent:** Send only 204 response code with no other information.

Inter-SCP Health Check

In inter-SCP health check scenarios, a consumer SCP-C performs health check query on peer SCP instances before sending any SBI message request.

When a consumer SCP-C receives a health query request from a consumer NF, it checks for the availability of a healthy SCP-P to which the SBI message request can be forwarded.

The following procedure describes how a consumer SCP-C checks the status of peer producer SCP-P instances:

1. SCPC-Notification sends the InterScpList to SCPC-Audit through REST APIs if the isScpHealthCheckSvcEnabled REST API parameter is enabled. For more information about this parameter, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
2. SCPC-Configuration sends the configuration information, such as isScpHealthCheckSvcEnabled, time interval to trigger periodic health query polls, number of consecutive positive responses, number of negative responses, and so on, to SCPC-Audit.
3. SCPC-Audit periodically triggers health check query polls to SCP-P through SCP-Worker of SCP-C with 3gppapiroot: scp-pfqdn+ruriPath of health query if the isScpHealthCheckSvcEnabled REST API parameter is enabled.
4. SCP-Worker forward the health query request received from SCPC-Audit toward SCP-P.
5. SCP-P responds with its health query status.
6. SCPC-Audit obtains the response for the health query request from SCP-P through SCP-Worker.
7. SCPC-Configuration sends the configuration information, such as isScpHealthCheckSvcEnabled, time interval to trigger periodic health query polls, number of consecutive positive responses, number of negative responses, and so on, to SCP-Worker.
8. SCPC-Audit sends the health status of the inter-SCPs to SCP-Worker for the inter-SCP messages processing.

Managing SCP Health Check API

Enable

By default, this feature is enabled at the ingress side. However, in case of inter-SCP scenarios, this feature is disabled by default. To enable this feature, you must set the health_check option to true as described in [Configuring SCP Features](#).

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Features](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features" and "Configuring Error Profiles" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- ocscp_worker_health_check_rx_req_total
- ocscp_worker_health_check_success_res_total
- ocscp_worker_health_check_error_res_total
- ocscp_interscp_health_check_status_success_total
- ocscp_interscp_health_check_status_failure_total
- ocscp_health_check_status_failed
- ocscp_interscp_health_check_status_failed

- ocsdp_audit_interscp_health_check_tx_req_total
- ocsdp_audit_interscp_health_check_rx_res_total

The following alerts are added in the [Alerts](#) section:

- [SCPHealthCheckFailedForPeerSCP](#)
- [SCPHealthCheckFailed](#)

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.25 Verbose Logging for SCP

SCP's warn and error level logs are enhanced to display more information to ease the troubleshooting process for various issues in the production environment.

The Verbose Logging for SCP feature defines a common log format to include required information to enhance debugging process for WARN and ERROR level logs. Using the following log format, ERROR and WARN level logs are modified to standardize the log format, add more details, and enhance readability:

The following is the log level format for SCP-Worker and SCP-nrfProxy microservices:

- WARN: Category: <<category>>, Event: <<Event>>, Details: <<Message_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, Details: <<Message_Details>>, Exception: {Cause:<<Exception_cause>>, Message: <<Exception_Message>>, StackTrace: <<Exception_Stacktrace>>}

The following is the log level format for SCPC-Notification microservice:

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message_Details>>, Exception:{Cause:<<Exception_cause>>, Message: <<Exception_Message>>, StackTrace: <<Exception_Stacktrace>>}

The following is the log level format for SCPC-Audit microservice:

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message_Details>>, Exception:{Cause:<<Exception_cause>>, Message: <<Exception_Message>>, StackTrace: <<Exception_Stacktrace>>}

OR

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, CustomString: <<Audit-Type>>, Details: <<Message_Details>>

- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, CustomString: <<Audit-Type>>, Details: <<Message_Details>>, Exception: {Cause:<<Exception_cause>>, Message: <<Exception_Message>>, StackTrace: <<Exception_Stacktrace>>}

The following is the log level format for SCP-Load-Manager microservice:

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message_Details>>, Exception:{Cause:<<Exception_cause>>, Message: <<Exception_Message>>, StackTrace: <<Exception_Stacktrace>>}

The following is the log level format for the SCP-Cache microservice:

- WARN: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message_Details>>
- ERROR: Category: <<category>>, Event: <<Event>>, EventID: <<App-Event-ID>>, Details: <<Message_Details>>, Exception:{Cause:<<Exception_cause>>, Message: <<Exception_Message>>, StackTrace: <<Exception_Stacktrace>>}

Note

- This feature supports SCP-Worker and SCP-nrfProxy microservice with WARN and ERROR level logs.
- SCP is deployed with WARN level log in the production environment. This is applicable for SCP-Worker and SCP-nrfProxy microservice.
- SCP is deployed with INFO level log in the production environment. This is applicable for SCPC-Notification, SCPC-Audit, SCP-Load-Manager, and SCP-Cache microservices.

The SCP log format is made verbose to follow a common format for WARN and ERROR log levels to determine and investigate issues in various events as described in the following table:

Table 3-27 Log Attributes

Log Attribute	Description
Category	Determines the category of log messages.
Event	Represents logged message event type.
EventID	Unique ID to identify associated category and sub category for logged message. EventID format: OSCP-XXX-YY-ZZZ, where • XXX: Represents Micro service codes • YY: Represents Category • ZZZ: Represents Event TYPE Note: This log attribute is only applicable for SCPC-Notification, SCPC-Audit, SCP-Load-Manager, and SCP-Cache microservices.
Message_Details	Represents the actual message defining the error.
Exception_cause	Returns the cause of an error.
Exception_Message	Represents actual exception message.
Exception_Stacktrace	Contains complete stack trace which is causing the error.

Table 3-27 (Cont.) Log Attributes

Log Attribute	Description
CustomString	Represents a custom string field with enumerated valid values. Note: This log attribute is only applicable for SCPC-Audit microservice. In Audit microservice, the AuditType can have specific values such as SCHEDULED or OnDemandAudit.

The new log format provides comprehensive information about an issue comprising issue category, event name, and detailed description of the issue to help you identify and resolve errors.

The following table describes log levels for SCP-Worker for various event types:

Table 3-28 Log Levels for SCP-Worker

Category	Event	EventID	Description	Cause	Action
UP_STREAM	CONNECTION_TIMEOUT	OCSCP-WKR-UPSTR-EV001	This event is raised when connection establishment fails due to connect timeout expiry.	This event is raised when connection establishment fails due to connect timeout expiry. For example, when SCP trying to connect Kafka to send message and it is taking time this event will be raised.	Ensure that Kafka cluster is up and running and it is configuration check the logs for more information.
	REQUEST_TIMEOUT	OCSCP-WKR-UPSTR-EV002	This event is raised when request processing fails due to response not received within configured time.	-	-
	RESPONSE_TIMEOUT	OCSCP-WKR-UPSTR-EV003	This event is raised when response processing taking time than configured time.	This event is raised when configured total transaction timeout is exhausted while processing the request.	- Ensure that the producer NF is responding within time. - Update the total transaction timeout. - Check the logs for more information.
	RETRY_COUNT_EXHAUSTED	OCSCP-WKR-UPSTR-EV004	This event is raised when request routing fails as all retry attempts are exhausted. All retry attempts resulted in unsuccessful responses.	This event is raised when all configured retry attempts are exhausted and request routing still failed.	-
OVERLOAD	POD_OVERLOAD	OCSCP-WKR-OVRD-EV001	This event specifies the transition of pod overload state from one state to another.	This event is raised when CPU-based threshold level compares it with traffic threshold.	Check the resource configuration and incoming traffic.
	PENDING_TRANSACTION_OVERLOAD	OCSCP-WKR-OVRD-EV002	This event is raised when the pending transaction counts reaches to configured threshold level.	This event is raised when pending transaction count reaches configured overload threshold level.	-

Table 3-28 (Cont.) Log Levels for SCP-Worker

Category	Event	EventID	Description	Cause	Action
HEALTH_CHECK	READINESS_FAILURE	OCSCP-WKR-HLTCHK-EV001	This event is raised when the default DB records are not created and the cache members or routing options are not available or the rule engine is down.	This event is raised when the default DB records are not created and the cache members or routing options are not available or rule engine is down. - Cache Member is not up. - Routing Option Config. - Routing Option Config Set. - Ocscp NF Service Config - Ocscp NF Service Config Set. - Worker Pod Overload Action Policy - Worker Pod Overload Control Policy - Worker Pod Overload Discard Policy - SCP NF Profiles - SCP Features - Local NF OAuth2 Required - Access Token Granularity - OCI Config - OCI Threshold Config - TLS Configuration	- Check if the DB is up and running and the connection with DB is successful and the required data is available in the DB. - Check if the Cache service is up.
	THREAD_STATUS	OCSCP-WKR-HLTCHK-EV002	This event is raised whenever liveliness check fails due any threads got stuck.	Thread remains stuck for a few seconds.	Check the logs for more information.
ROUTING	DESTINATION_SEARCH_EXHAUSTED	OCSCP-WKR-ROUTING-EV001	This event is raised when no further valid destination found for routing, all eligible producers are attempted.	This event is raised when all eligible producers are already attempted and no valid destination is available for routing.	-
	RULE_NOT_FOUND	OCSCP-WKR-ROUTING-EV002	This event is raised when routing rule are not found for the selected producer to route the messages.	This event is raised when routing rule is not configured or not available for the selected producer.	-
	INVALID_API_VERSION_IN_REQUEST	OCSCP-WKR-ROUTING-EV003	This event is raised when no matching rule is found for received API version.	This event is raised when received API version does not match any configured routing rule.	-
	RELEASE16_VALIDATION_FAILED	OCSCP-WKR-ROUTING-EV004	This event is raised when any Rel16 message validation has failed.	This event is raised when Rel16 specific request validation failed during routing.	-
	RULE_MISMATCH_NOT_FOUND	OCSCP-WKR-ROUTING-EV005	This event is raised when no matching routing rule is found for the request.	This event is raised when request parameters do not match any configured routing rule.	-

Table 3-28 (Cont.) Log Levels for SCP-Worker

Category	Event	EventID	Description	Cause	Action
	MESSAGE_LOOP_DETECTED	OCSCP-WKR-ROUTING-EV006	This event is raised when request header "VIA" contains self fqdn (SCP FQDN).	This event is raised when the VIA header already contains SCP self fqdn and message loop is detected.	-
	DESTINATION_CONGESTED	OCSCP-WKR-ROUTING-EV007	This event is raised when SCP detects that the selected destination is congested.	This event is raised when selected upstream destination is marked congested based on received signals or configured criteria.	-
	DESTINATION_WEBCLIENT_CONNECTION_FAILURE	OCSCP-WKR-ROUTING-EV008	This event is raised when upstream connection establishment has failed.	This event is raised when the webclient connection establishment to selected upstream destination has failed.	-
	INVALID_OR_EMPTY_DETAILS	OCSCP-WKR-ROUTING-EV009	This event is raised whenever any routing related data is empty or contains invalid data.	This event is raised whenever any routing related data is empty or contains invalid data.	-
	MISCELLANEOUS	OCSCP-WKR-ROUTING-EV010	This event is raised whenever any warning raised due to miscellaneous reasons, such as failure in inter- plmn rule creation, handling routing failures responses.	This event is raised whenever any warning raised due to miscellaneous reasons, such as failure in inter- plmn rule creation, handling routing failures responses.	-
INTERNAL	INTERNAL_SERVER_ERROR	OCSCP-WKR-INTRNL-EV001	This event is raised when any internal error, such as monitoring of Kubernetes resources, Coherence request time out, failed to load or validate SSL certificates, object invocation, and pegging of metrics.	This event is raised when any internal error, such as monitoring of Kubernetes resources, Coherence request time out, failed to load or validate SSL certificates, object invocation, and pegging of metrics.	Check the logs for more information.
	CONVERSION_FAILURE	OCSCP-WKR-INTRNL-EV002	This event is raised when any unsupported format, type cast, object formation, or parsing fails.	This event is raised when any unsupported format, type cast, object formation, or parsing fails. Examples: - compressing req.body - parsing json/object data - unsupported request/response body format	Check the logs for more information.

Table 3-28 (Cont.) Log Levels for SCP-Worker

Category	Event	EventID	Description	Cause	Action
	INITIALIZATION_FAILED	OCSCP-WKR-INTRNL-EV003	This event is raised when any class initialization failure such as Jetty client and Kafka admin client creation.	This event is raised when any class initialization failure such as Jetty client and Kafka admin client creation. For example, TLS data is not available to initialize the servers. While building SSL context. Precondition failure on threads creation.	Check the logs for more information.
	MISCELLANEOUS	OCSCP-WKR-INTRNL-EV004	This event is raised when any failures in retrieval or updating of values to an object or unexpected event method execution.	This event is raised when any failures in retrieval or updating of values to an object or unexpected event method execution.	Check the logs for more information.
	TRANSACTION_CANCEL	OCSCP-WKR-INTRNL-EV005	This event is raised when an in progress transaction gets cancelled before completion.	This event is raised when transaction is cancelled due to timeout, client disconnect, shutdown or internal flow interruption.	-
	TRACE_ERROR	OCSCP-WKR-INTRNL-EV006	This event is raised when failure happens while processing trace related logging or trace context details.	This event is raised when trace related internal processing fails.	-
	DYNAMIC_TREE_READ_WRITE_FAILURE	OCSCP-WKR-INTRNL-EV007	This event is raised whenever read or write operation on dynamic tree data fails.	This event is raised when dynamic tree data access, update or persistence operation fails.	-
DATA_SYNC	SSE_FAILURE	OCSCP-WKR-DATSYN-EV001	This event is raised when connectivity issue with Configuration/Notification MS, which impacts data fetch	This event is raised when connectivity issue with Configuration/Notification MS, which impacts data fetch	- Check the Notification and Configuration service(s) are up and running. - check the logs for more detailed information and contact customer support
	CONFIG_DATA_PARSE	OCSCP-WKR-DATSYN-EV002	This event is raised when Parsing Failed for received Config data	This event is raised when Parsing Failed for received Config data	Check the logs for more information.
	RULE_ENGINE	OCSCP-WKR-DATSYN-EV003	This event is raised when Failed to sync and update Routing rules from Notification MS	This event is raised when populating rules of virtual services.	Check the logs for more information.
	KEEP_ALIVE	OCSCP-WKR-DATSYN-EV004	This event is raised when Received Keep Alive, Config connectivity is UP	This event is raised when Received Keep Alive request to make sure that connection is up and running.	Check the logs for more information.

Table 3-28 (Cont.) Log Levels for SCP-Worker

Category	Event	EventID	Description	Cause	Action
	INVALID_DATA	OCSCP-WKR-DATSYN-EV005	This event is raised whenever any Bad Configuration data is received, Missing of parameters in configuration.	This event is raised whenever any Bad Configuration data is received, Missing of parameters in configuration.	Check the logs for more information.
	CONFIG_UPDATE	OCSCP-WKR-DATSYN-EV006	This event is raised whenever any failure while fetching/updating Configuration Value(s) received from Config MS	This event is raised whenever any failure while fetching/updating Configuration Value(s) received from Config MS	Check the logs for more information.
CACHE	CACHE_INITIALIZATION	OCSCP-WKR-CACHEF-EV001	This event is raised when Initialization of coherence Cache is failed.	This event is raised when Coherence Cache not initialized	- Check Cache service is up or not. - Check the logs for more information.
	CACHE_READ_WRITE_FAILURE	OCSCP-WKR-CACHEF-EV002	This event is raised whenever any Read/Write Operations are failed for Cache	This event is raised when pushing data to Cache or getting Data from Cache	Check the logs for more information.
	CACHE_INVALID_OR_EMPTY_DETAILS	OCSCP-WKR-CACHEF-EV003	This event is raised when we receive any Incorrect/Empty data from Cache	This event is raised when data is not present in Cache like - LCI Data is missing - OCI Data is missing - OCI Scope is missing - Primary key is missing	Check the logs for more information.
	CACHE_SERVICE_AVAILABILITY_CHECK_FAILURE	OCSCP-WKR-CACHEF-EV004	This event is raised when cache microservice Coherence service availability check fails.	This event is raised when cache service member or Coherence service is not reachable or not healthy.	-
	LOADMANAGER_SERVICE_AVAILABILITY_CHECK_FAILURE	OCSCP-WKR-CACHEF-EV005	This event is raised when load manager microservice Coherence service availability check fails.	This event is raised when load manager service member or Coherence service is not reachable or not healthy.	-
MESSAGE_VALIDATION	CCA_HEADER_VALIDATION	OCSCP-WKR-MSGVALD-EV001	Validation for CCA Header failed	This event is raised when Parsing CCA Header data.	Verify the CCA request headers, check the logs for more information.
	OCI_HEADER_VALIDATION	OCSCP-WKR-MSGVALD-EV002	Validation for OCI Header failed	This event is raised when Parsing OCI Header data.	Verify the OCI request headers, check the logs for more information.

Table 3-28 (Cont.) Log Levels for SCP-Worker

Category	Event	EventID	Description	Cause	Action
TASK_PROCESSING	OPTIONAL_CACHING_MODEL_ERROR	OCSCP-WKR-TSK-EV001	This event is raised when optional caching related modeld processing fails.	This event is raised when modeld data used for optional caching is invalid, missing or failed during processing.	-
	MODEL_CACHE_UPDATE_ERROR	OCSCP-WKR-TSK-EV002	This event is raised when failed to update the modeld cache on profile notification being received	CustomNotificationData contains data that cannot be parsed or empty details.	CustomNotificationData object should carry correct and required details.
	DATAPOLLING_FAILURE	OCSCP-WKR-TSK-EV003	This event is raised when failed to poll the data from notification MS	REST API call failed to notification MS due to invalid URI or wrong query parameters or some other network errors.	URI should be correct with valid query parameters.
PROCESS_LIFECYCLE	SHUTDOWN_PROCESS	OCSCP-WKR-PROCLF-EV001	This event indicates that process shutdown has started	Reason of shutdown could be pod graceful shutdown of pod.	No Action is needed if shutdown is graceful.

The following table describes log levels for SCP-nrfProxy for various event types:

Table 3-29 Log Levels for SCP-nrfProxy

Category	Event	EventID	Description	Cause	Action
HEALTH_CHECK	READINESS_FAILURE	OCSCP-NRF-HLTCHK-EV001	This event is raised when Cache members/ Routing options are not available or Rule engine is down.	This event is raised when Default DB Records of the following are not created - Canary Release - Ocscp NF Service Config - Ocscp NF Service Config Set. - OCSCP NF Services - NRF NF config	Check if the DB is up and running and the connection with DB is successful and the required data is available in the DB.
	THREAD_STATUS	OCSCP-NRF-HLTCHK-EV002	This event is raised whenever any Thread(s) got Stuck.	This event is raised whenever liveness check fails due any Thread(s) got Stuck.	Check the logs for more detailed information and contact customer support.
ROUTING	DESTINATION_SEARCH_EXHAUSTED	OCSCP-NRF-ROUTING-EV001	This event is raised when No further valid Destination found for routing, all eligible producers are attempted.	-	-
	RULE_NOT_FOUND	OCSCP-NRF-ROUTING-EV002	This event is raised when Routing rule are not found for the selected Producer to route the messages.	-	-

Table 3-29 (Cont.) Log Levels for SCP-nrfProxy

Category	Event	EventID	Description	Cause	Action
	DESTINATION_WEB_CLIENT_CONNECTION_FAILURE	OCSCP-NRF-ROUTING-EV003	This Event is raised when Upstream Connection establishment failed.	-	-
	INVALID_OR_EMPTY_DETAILS	OCSCP-NRF-ROUTING-EV004	This event is raised whenever any Routing related data is empty or contains invalid data.	This event is raised whenever any Routing related data is empty or contains invalid data. Like Routing rules are empty, NRF Discovery service callback response is null	Check the logs for more detailed information and contact customer support.
	ROUTING_MISCELLANEOUS	OCSCP-NRF-ROUTING-EV005	This event is raised whenever any Warning raised due to Miscellaneous reasons, like failure in inter plmn rule creation, handling routing failures responses .	This event is raised when trying to send response after Future result Set Or Expired. Received Non-2XX response.	Check the logs for more detailed information and contact customer support.
INTERNAL	INTERNAL_SERVER_ERROR	OCSCP-NRF-INTRNL-EV001	This event is raised whenever any Internal Error like, failed to read application.properties file and failure in Registering of NRF Specific details.	This event is raised when some thing went while performing an actions like - While handling NRF Discovery service request. - While handling NRF Discovery service response. - While performing some utility actions (log level update, pegging metrics)	Check the logs for more detailed information and contact customer support.
	CONVERSION_FAILURE	OCSCP-NRF-INTRNL-EV002	This event is raised whenever any Unsupported format/Type cast/Object formation/parsing failures.	This event is raised whenever any Unsupported format/Type cast/Object formation/parsing failure Like - URI object construction failure - Parsing problem details to json array. - Parsing Discovery response to json array - Deserializing NRF discovery response - Constructing Delegated Discovery Response - Parsing monitor Queue threshold	Check the logs for more detailed information and contact customer support.
	INITIALIZATION_FAILED	OCSCP-NRF-INTRNL-EV003	This event is raised whenever any Class Initialization failure like Jetty client and Kafka admin client creation.	-	-

Table 3-29 (Cont.) Log Levels for SCP-nrfProxy

Category	Event	EventID	Description	Cause	Action
	MISCELLANEOUS	OCSCP-NRF-INTRNL-EV004	This event is raised whenever any failures in Retrieval/Updating of values to an object or unexpected event method execution.	This event is raised whenever any failures in Retrieval/Updating of values to an object or unexpected event method execution like. - Failed to copy user defined variables - Could not extract cache key from disc-cache-key-header received from SCP-Worker - While deleting unwanted services	Check the logs for more detailed information and contact customer support.
DATA_SYNC	SSE_FAILURE	OCSCP-NRF-DATSYN-EV001	This event is raised when Connectivity issue with Configuration/ Notification MS, which impacts data fetch.	-	Check the logs for more detailed information and contact customer support.
	CONFIG_DATA_PARSE	OCSCP-NRF-DATSYN-EV002	This event is raised when Parsing Failed for received Config data.	This event is raised when Parsing Failed for received Config data.	Check the logs for more detailed information and contact customer support.
	KEEP_ALIVE	OCSCP-NRF-DATSYN-EV003	This event is raised when Received Keep Alive, Config connectivity is UP.	This event is raised when Received Keep Alive request to make sure that connection is up and running.	Check the dependent services are up and running. Check the logs for more detailed information and contact customer support.
	INVALID_DATA	OCSCP-NRF-DATSYN-EV004	This event is raised whenever any Bad Configuration data is received, Missing of parameters in configuration.	This event is raised whenever any Bad/ Inadequate configuration data is received.	Check the logs for more detailed information and contact customer support.
	CONFIG_UPDATE	OCSCP-NRF-DATSYN-EV005	This event is raised whenever any failure while fetching/updating Configuration values received from Config MS	This event is raised whenever any failure while fetching/updating Configuration values received from Config MS	Check the logs for more detailed information and contact customer support.
TASK_PROCESSING	OPTIONAL_CACHING_MODEL_ERROR	OCSCP-NRF-TSK-EV001	This event is raised when an exception occurs during the execution of the optional caching logic.	This event is raised whenever any exception occurs during the processing of optional caching for ModelID discovery responses.	Check the logs for more detailed information and contact customer support.
	MODEL_CACHE_UPDATE_ERROR	OCSCP-NRF-TSK-EV002	This event is raised when failed to update the model d cache on profile notification being received	CustomNotificationData contains unparseable data or empty details.	CustomNotificationData object should carry correct and required details
	DATA_POLLING_FAILURE	OCSCP-NRF-TSK-EV003	This event is raised when failed to poll the data from notification MS	Rest api call failed to notification MS due to invalid URI or wrong query parameters or some other network errors.	URI should be correct with valid query parameters.

The following table describes log levels for SCPC-Notification for various event types:

Table 3-30 Log Levels for SCPC-Notification

Category	Event	EventID	Description	Cause	Action
READINESS_FAILURE	DB_RECORDS_NOT_AVAILABLE	OSCP-NTF-RDYNES-EV001	This event is raised when the default database records are not created.	This event is raised when default database records for the following are not created: • Canary Release • SCP Profile • NRF Details • Routing Options • System Options • Virtual Services • Service Entries • Destination Rules	Check if the database is up and running and if the connection to the database is functioning properly.
	REQUIRED_DATA_NOT_AVAILABLE	OSCP-NTF-RDYNES-EV002	This event is raised due to a readiness check failure.	This event is raised if the readiness check fails due to any of the following data being unavailable in the database: • Canary Release • SCP Profile • NRF Details • Routing Options • System Options • Virtual Services • Service Entries • Destination Rules	Check if the database is up and running, if the connection to the database is successful, and if the required data is available in the database.
LIVENESS_FAILURE	THREAD_WATCHDOG_FAILURE	OSCP-NTF-LIVNES-EV001	This event is raised whenever any threads become stuck.	This event is raised whenever the liveness check fails due to one or more threads being stuck.	Check if there are any threads stuck.
	QUEUE_FULL	OSCP-NTF-LIVNES-EV002	This event is raised whenever the liveness probe condition fails and the application restarts due to the notification queue being full.	This event is triggered whenever the liveness probing condition fails and the application restarts due to the notification queue being full.	Check whether the notification queue is full.

Table 3-30 (Cont.) Log Levels for SCPC-Notification

Category	Event	EventID	Description	Cause	Action
NF_RULE_CREATE_OR_UPDATE_FAILURE	NF_PROFILE_VALIDATION_FAILURE	OSCP-NTF-RULUPD-EV001	This event is raised when NF profile validation fails.	NF profile validation can fail due to: - Missing mandatory fields such as nfType, event, nfStatus, nfInstanceId - Invalid nfInstanceId - Any exception occurring while checking for duplicate locality in the NF profile - Load Balancer IP is enabled but missing in the NF profile - Invalid HOST - Invalid serviceName - Invalid IPAddress - Invalid NfServiceFqdn - Duplicate IpEndPoints/ServiceInstanceIDs - SCP receives a notification of a duplicate SCP NF profile - SCP receives a notification of a duplicate NRF NF profile	Check the NF profile data.
	RULE_PROCESSING_FAILURE	OSCP-NTF-RULUPD-EV002	This event is raised when rule creation fails.	Rule creation or update can fail due to: - Notification received for partial profile updates for an unknown nfInstanceId - NF_PROFILE_CHANGED event contains both NFProfile and ProfileChanges - Exception occurs while handling events for DNS SRV - Failed to trigger GET request to NRF to retrieve the latest profile or received a null or error response - Any other unknown error occurs while processing the notification	Check the logs for more detailed information
	NF_PROFILE_REFINE_ERROR	OSCP-NTF-RULUPD-EV003	This event is raised when: - IOException or ApiException occurs during data refinement in NFService - An exception is encountered due to incorrect configuration for the profile while creating a refined version of NFProfile.	This event is raised when: - IOException or ApiException occurs during data refinement in NFService - An exception is encountered due to incorrect configuration for the profile while creating a refined version of NFProfile.	Check the NF profile configuration.

Table 3-30 (Cont.) Log Levels for SCPC-Notification

Category	Event	EventID	Description	Cause	Action
	DB_UPDATE_FAILURE	OSCP-NTF-RULUPD-EV004	This event is raised when saving data to the database fails.	This event is raised when saving to the database fails during the creation or update of NF rules.	Check the database connection.
	DB_READ_FAILURE	OSCP-NTF-RULUPD-EV005	This event is raised when reading data from the database fails.	This event is raised if reading data from the database fails during the creation or update of NF rules.	Check the database connection.
	DB_DELETE_FAILURE	OSCP-NTF-RULUPD-EV006	This event is raised when a database deletion operation fails.	This event is raised when deleting from the database fails during the creation or update of NF rules.	Check the database connection.
	RULE_CREATE_OR_UPDATE_MISCELLANEOUS	OSCP-NTF-RULUPD-EV007	This event is raised when rule creation fails due to miscellaneous reasons.	This event is raised when rule creation fails due to various issues, such as a notification from the audit microservice having a timestamp earlier than the SCP processed timestamp.	Check whether the timestamp of the notification pushed from the audit microservice is behind the SCP processed timestamp.
	RULE_CREATE_OR_UPDATE_ABORTED	OSCP-NTF-RULUPD-EV008	This event is raised when rule creation is aborted due to failures.	This event is raised when rule creation is aborted due to a notification pushed from the configuration microservice, and the timestamp of the configuration notification is behind the SCP processed timestamp.	Check the timestamps and verify if the notification microservice has already processed the received notification from the configuration.
	QUEUE_FULL_WHEN_PROFILE_RECEIVED	OSCP-NTF-RULUPD-EV009	This event is raised when the notification queue is full.	This event is raised when the notification queue is full.	Check the notification queue size.
	NF_PROFILE_IGNORED	OSCP-NTF-RULUPD-EV010	This event is raised when the NF profile is ignored during the process.	This event is raised when a received NF profile notification is ignored and not processed, such as when the profile is identified as a duplicate or does not meet the processing criteria.	Check the logs for the specific reasons.
NF_RULE_DELETION_FAILURE	RULE_DELETE_PROCESSING_FAILURE	OSCP-NTF-RULDEL-EV001	This event is raised when rule deletion fails due to certain errors or failures.	This event is triggered when the deletion of the rules fails due to miscellaneous reasons.	Check the logs for the specific reasons.
	RULE_DELETE_ALREADY_REGISTERED	OSCP-NTF-RULDEL-EV002	This event is raised when a deregistration request is received for an NF that has already been deregistered.	This event is raised when a deregistration request is received for an NF that has already been deregistered.	Check if the received deregistration request is for an NF that has already been deregistered.
	RULE_DELETE_ABORTED	OSCP-NTF-RULDEL-EV003	This event is raised when the deletion of a rule is aborted due to miscellaneous reasons.	This event is raised when rule deletion is aborted due to miscellaneous reasons, such as receiving a deregistration notification for the last NF instance.	Verify whether the received deregistration notification is for the last NF instance.

Table 3-30 (Cont.) Log Levels for SCPC-Notification

Category	Event	EventID	Description	Cause	Action
	RULE_DELETE_DB_READ_FAILURE	OSCP-NTF-RULDEL-EV004	This event is raised when there is a failure to delete a rule while reading from the database.	This event is raised when an exception occurs while reading from the database during rule deletion.	Check the database connection.
	RULE_DELETE_DB_DELETE_FAILURE	OSCP-NTF-RULDEL-EV005	This event is raised when there is a failure to delete a rule from the database.	This event is raised when an exception occurs while reading from the database during rule deletion.	Check the database connection.
NF_RULE_PROCESSOR_FAILURE	RULE_PROCESSOR_MISCELLANEOUS	OSCP-NTF-RULPRC-EV001	This event is raised when rule processing fails due to miscellaneous reasons.	This event is raised when rule processing fails due to various reasons.	Check the logs to identify the miscellaneous reasons.
	RULE_PROCESSOR_DB_READ_FAILURE	OSCP-NTF-RULPRC-EV002	This event is raised when rule processing fails due to a database read failure.	This event is raised when an exception occurs while reading from the database during rule deletion.	Check the database connection.
	RULE_PROCESSOR_DB_DELETE_FAILURE	OSCP-NTF-RULPRC-EV003	This event is raised when rule processing fails due to a database deletion failure.	This event is raised when rule processing fails due to a database delete operation failure.	Check the database connection.
	RULE_PROCESSOR_ABORTED	OSCP-NTF-RULPRC-EV004	This event is raised when rule processing fails due to receiving a notification from NRF for an NF configured as local.	This event is raised when rule processing fails due to receiving a notification from NRF for an NF configured as local.	Verify whether the received notification from NRF is for an NF configured as local.
INTERNAL	INTERNAL_ERROR	OSCP-NTF-INTRNL-EV001	This event is raised whenever there is an internal error such as monitoring of Kubernetes resources, object invocation, or pegging of metrics.	This event is raised whenever there is an internal error, such as issues with monitoring Kubernetes resources, object invocation, or metric pegging.	Check the logs for more detailed information.
	CONVERSION_FAILURE	OSCP-NTF-INTRNL-EV002	This event is raised whenever there are failures in unsupported format/type casting, object formation, or parsing.	This event is raised whenever there are failures related to unsupported formats, type casting, object formation, or parsing.	Check the logs for more detailed information.
	INITIALIZATION_FAILURE	OSCP-NTF-INTRNL-EV003	This event is raised when there is a failure during class initialization.	This event is raised whenever there is a failure in class initialization, loading, or queue initialization.	Check the logs for more detailed information.
	MISCELLANEOUS	OSCP-NTF-INTRNL-EV004	This event is raised whenever there are failures in retrieving or updating values to an object, or during unexpected method execution.	This event is raised whenever there is a failure in class initialization, loading, or queue initialization.	Check the logs for more detailed information.

Table 3-30 (Cont.) Log Levels for SCPC-Notification

Category	Event	EventID	Description	Cause	Action
	DB_READ_FAILURE_AT_STARTUP	OSCP-NTF-INTRNL-EV005	This event is raised whenever there is a database read failure during application startup.	This event is triggered whenever a database read failure occurs during application startup.	Check the database connection.
	INTERNAL_DATA_NOT_FOUND	OSCP-NTF-INTRNL-EV006	This event is raised whenever required internal data is missing.	This event is raised whenever required internal data, such as FQDN or IP addresses for the SCP profile, is missing.	Check the SCP profile to ensure that all required internal data is provided.
DATA_SYNC	CONFIG_DATA_PARSE_FAILURE	OSCP-NTF-DATSYN-EV001	This event is raised when parsing fails for received config data.	This event is raised when parsing fails for the received configuration data.	Check the logs for more detailed information.
	CONFIG_UPDATE_FAILURE	OSCP-NTF-DATSYN-EV002	This event is raised whenever there is a failure while fetching or updating configuration values received from the Config MS	This event is raised whenever SCP encounters a virtual service with empty or null host values.	Check if the virtual service has empty or null hosts.
	DATA_SYNC_DB_READ_FAILURE	OSCP-NTF-DATSYN-EV003	This event is raised when reading the data from DB fails in Server Sent Events (SSE) communications.	This event is raised when reading data from the database fails during SSE communications.	Check the connection to the database.
	CONFIG_DATA_NOT_FOUND	OSCP-NTF-DATSYN-EV004	This event is raised when the configured data is not found in DB sync.	This event is raised when the configured data is not found in the database synchronization.	Check the logs to verify if the requested feature-specific configurations are present.
	INVALID_DATA	OSCP-NTF-DATSYN-EV005	This event is raised when the configured data is not found during database synchronization.	This event is raised whenever bad configuration data is received or parameters are missing in the configuration.	Check the logs for more detailed information.
DBSNAPSHOTS_UPDATE	DB_SNAPSHOT_READ_FAILURE	OSCP-NTF-DBSNAPSH-EV001	This event is raised whenever an exception occurs while reading virtual services or serviceEntries from the database.	This event is raised whenever an exception occurs while reading Virtual Services or ServiceEntries from the database.	Check the database connection.
TASK_PROCESSING	TASK_SCHEDULE_FAILURE	OSCP-NTF-TSK-EV001	This event is raised when the system fails to schedule a data fetch task.	This event is raised when the system fails due to internal errors, resource constraints, or unexpected exceptions during task initialization.	Check the logs for more detailed information.

Table 3-30 (Cont.) Log Levels for SCPC-Notification

Category	Event	EventID	Description	Cause	Action
	MULTIPLE_TASKS_PRESENT	OSCP-NTF-TSK-EV002	This event is raised when multiple IN_PROGRESS task records are found for the same processing flow where only one active task is expected.	Duplicate or stale task entries are present for the same component/task flow, resulting in more than one active task record being available for processing.	Check the task records for duplicate IN_PROGRESS entries and review the logged task IDs/component. The system proceeds with only the first IN_PROGRESS task and skips/ignores the remaining duplicate tasks for that cycle; stale duplicate tasks may continue to trigger this warning until cleaned up or moved out of IN_PROGRESS. Contact customer support if duplicates persist or task processing does not complete.
	TASK_DATA_FAILURE	OSCP-NTF-TSK-EV003	This event is raised when task data is missing, invalid or cannot be parsed during task processing.	This event is raised whenever the task descriptor is empty, malformed, incomplete or cannot be deserialized into the expected task data structure.	Check the logs for more detailed information and contact customer support
	TASK_UPDATE_FAILURE	OSCP-NTF-TSK-EV004	This event is raised when updating the task status or task data in DB fails.	Failed due to DB connectivity issue or DB Down or any other DB issue while updating the task record.	Check whether DB down alerts are raised and refer to those alerts. Check network connectivity with the DB. Also review logs for the task ID/component and contact customer support if task status/data updates continue to fail.
	TASK_INTERNAL_ERROR	OSCP-NTF-TSK-EV005	This event is raised whenever any internal error occurs while processing the task.	This event is raised whenever any unexpected internal exception or processing failure occurs during task execution.	Check the logs for more detailed information and contact customer support
SCP_PROFILE_UPDATE	INVOKE_ON_DEMAND_AUDIT	OSCP-NTF-SCPUPD-EV0001	This event is raised when SCP profile update processing invokes on-demand audit to reprocess affected SCP profiles, or when that audit invocation fails.	A self SCP profile update changed serving localities, including foreign-locality crossover or deleted localities, requiring on-demand audit. It can also be raised when Audit MS returns an unsuccessful/null response or retry attempts are exhausted.	Check the logs for more detailed information. If the logs are informational, make sure indicated changes are inline with the intended SCP profile changes. If the specific logs indicate an error condition, contact customer support.

Table 3-30 (Cont.) Log Levels for SCPC-Notification

Category	Event	EventID	Description	Cause	Action
	SUCCESSFUL_UPDATE	OSCP-NTF-SCPUPD-EV0002	This event is raised when SCP profile update processing completes successfully.	This event is raised whenever SCP profile update flow completes successfully after updating the registry and processing the affected localities.	Check the logs for more detailed information. No customer support action is needed here.
	SCP_UPDATE_INTERNAL_ERROR	OSCP-NTF-SCPUPD-EV0003	This event is raised whenever any internal error occurs during SCP profile update processing.	This event is raised whenever an unexpected internal processing failure occurs while extracting the self SCP profile or related data during self SCP profile update tasks	Check the logs for more detailed information and contact customer support. Also, using NF Profile Configuration API, retrieve self SCP profile and verify.

The following table describes log levels for SCPC-Audit for various event types:

Table 3-31 Log Levels for SCPC-Audit

Category	Event	EventID	Description	Cause	Action
READINESS_FAILURE	DB_RECORDS_NOT_AVAILABLE	OSCP-AUD-RDYNES-EV001	This event is raised when the default database records are not created.	This event is raised when default database records for the following are not created: - NRF Details - VirtualServices for NRF	Check if the database is up and running and if the connection to the database is functioning properly.
LIVENESS_FAILURE	THREAD_WATCHDOG_FAILURE	OSCP-NTF-LIVENES-EV001	This event is raised whenever any threads become stuck.	This event is raised whenever the liveness check fails due to one or more threads being stuck.	Check if there are any threads stuck.
AUDIT_FAILURE	ERROR_RESPONSE_RECEIVED	OSCP-AUD-AUDFR-EV001	This event is triggered whenever there is a failure in: - Parsing the response body from NRF - Processing the NF profile - Obtaining the NF profile from NRF - Response processing failures from NRF	This event is triggered whenever there is a failure in: - Parsing the response body from NRF - Processing the NF profile - Obtaining the NF profile from NRF - Response processing failures from NRF	Check the connection with NRF and verify the response coming from NRF.
	AUDIT_INTERNAL_FAILURE	OSCP-AUD-AUDFR-EV002	This event is raised whenever an exception occurs due to miscellaneous reasons while handling an AUDIT request.	This event is raised whenever an exception occurs due to miscellaneous reasons while handling an AUDIT request.	Check the logs for more detailed information.
	NRF_COMMUNICATION_ERROR	OSCP-AUD-AUDFR-EV003	This event is raised whenever the connection with NRF fails while sending the AUDIT request.	This event is raised whenever the connection with NRF fails while sending the AUDIT request.	Check the connection with NRF.

Table 3-31 (Cont.) Log Levels for SCPC-Audit

Category	Event	EventID	Description	Cause	Action
	DB_READ_FAILURE	OSCP-AUD-AUDFR-EV004	This event is raised when reading data from the database fails.	This event is raised when reading data from the database fails.	Check the connection with NRF.
NRF_HEALTH_CHECK	HEALTH_CHECK_FAILED	OSCP-AUD-HLTCHK-EV001	This event is raised when the connection with NRF fails while sending the Health Check request to NRF as part of the AUDIT.	This event is raised when the connection with NRF fails while sending the Health Check request to NRF as part of the AUDIT.	Check the connection with NRF.
	AUDIT_ABORTED	OSCP-AUD-HLTCHK-EV002	This event is raised when no NF is configured to learn from NRF.	This event is raised when there are no NF configured to learn from the NRF.	Check if any NFs are configured to learn from the NRF.
	NO_REGISTRATION_FOUND	OSCP-AUD-HLTCHK-EV003	This event is raised when no NRF is found to be healthy at the moment.	This event is raised when no NRF is found to be healthy at the moment.	Check if there are any healthy NRFs available.
INTERNAL	INTERNAL_ERROR	OSCP-AUD-INTRNL-EV001	This event is raised whenever an internal error occurs, such as issues with monitoring Kubernetes resources, object invocation, pegging of metrics, and so on.	This event is raised whenever there is an internal error, such as issues with monitoring Kubernetes resources, object invocation, or pegging of metrics.	Check the logs for more detailed information.
	MISCELLANEOUS	OSCP-AUD-INTRNL-EV002	This event is raised whenever an NF Profile record for the specified Instance ID does not exist in the database table while adding it to the Missed De-Register notification list as part of the AUDIT.	This event is raised whenever an NF profile record for this instance ID does not exist in the database table while adding it to the missed de-register notification list as part of the audit.	Check the logs for more detailed information.
	NRF_SERVICE_EVENT_ENQUEUE_FAILURE	OSCP-AUD-INTRNL-EV003	This event is raised whenever an exception occurs while enqueueing an NRF SRV task in the event queue.	This event is raised whenever an exception occurs while enqueueing an NRF service task in the event queue.	Check the logs for more detailed information.
	NRF_SERVICE_HANDLE_EVENT_FAILURE	OSCP-AUD-INTRNL-EV004	This event is triggered whenever there is a failure in handling the following NRF SRV events: 1. HOLD_AUDIT 2. START_ON_DEMAND_AUDIT 3. CANCELLATION	This event is triggered whenever there is a failure in handling the following NRF SRV events: 1. HOLD_AUDIT 2. START_ON_DEMAND_AUDIT 3. CANCELLATION	Check the logs for more detailed information.

Table 3-31 (Cont.) Log Levels for SCPC-Audit

Category	Event	EventID	Description	Cause	Action
	INITIALIZATION_FAILURE	OSCP-AUD-INTRNL-EV005	This event is raised whenever an exception occurs while reading the property file.	This event is raised whenever an exception occurs while reading the application properties file.	Check the logs for more detailed information about issues with the <code>application.properties</code> file.
	DNS_SRV_NRF_TASK_RESUMPTION_FAILURE	OSCP-AUD-INTRNL-EV006	This event is raised whenever an exception occurs while resuming an in-progress DNS SRV task.	This event is raised whenever an exception occurs while resuming an in-progress DNS SRV task.	Check the logs for more detailed information about the issue with resuming the in-progress DNS SRV task.
	PARSE_FAILURE	OSCP-AUD-INTRNL-EV007	This event is triggered whenever an exception occurs while reading the following environment variables: - AUDIT_INTERVAL - ALTERNATE_RESOLUTION_AUDIT_INTERVAL - INITIAL_DELAY_SECONDS_READINESS	This event is triggered whenever an exception occurs while reading the following environment variables: - AUDIT_INTERVAL - ALTERNATE_RESOLUTION_AUDIT_INTERVAL - INITIAL_DELAY_SECONDS_READINESS	Check the configuration of the environment variables.
DATA_SYNC	CONFIG_DATA_PARSE_FAILURE	OSCP-AUD-DATSYN-EV001	This event is raised whenever a failure occurs while parsing the received configuration data.	This event is raised whenever a failure occurs while parsing the received configuration data.	Check the logs for more details.
SCP_HEALTH_CHECK	SCP_HEALTH_INTERNAL_ERROR	OSCP-AUD-HLCAPI-EV001	This event is raised whenever an exception occurs while sending the health query request to the peer SCP.	This event is raised whenever an exception occurs while sending the health query request to the peer SCP.	Check the connection between scp-worker and scpc-audit, as well as between scp-worker and nextHopScp
	SCP_HEALTH_HANDLE_RESPONSE_FAILURE	OSCP-AUD-HLCAPI-EV002	This event is raised whenever an exception occurs while handling the health query response.	This event is raised whenever an exception occurs while handling the health query response.	Check the logs for more details.

The following table describes log levels for SCP-Load-Manager for various event types:

Table 3-32 Log Levels for SCP-Load-Manager

Category	Event	EventID	Description	Cause	Action
READINESS_FAILURE	HEALTH_CHECK_FAILED	OSCP-LMG-RDYNES-EV001	This event is raised when the Load-Manager readiness probe fails.	This event is raised when the coherence cache initialization check fails, indicating that the health check has failed.	Check the logs for more detailed information.

Table 3-32 (Cont.) Log Levels for SCP-Load-Manager

Category	Event	EventID	Description	Cause	Action
LIVENESS_FAILURE	THREAD_WATCHDOG_FAILURE	OSCP-LMG-LIVENESS-EV001	This event is raised whenever any threads become stuck.	The thread remains stuck for a few seconds.	Check the logs. For any assistance, contact My Oracle Support .
	HEALTH_CHECK_FAILED	OSCP-LMG-LIVENESS-EV002	This event is raised when the Load-Manager liveness probe fails.	This event is raised when the coherence cache initialization check fails, indicating that the health check has failed.	Check the logs. For any assistance, contact My Oracle Support .
INTERNAL	INTERNAL_ERROR	OSCP-LMG-INTRNL-EV001	This event is raised whenever an internal error occurs, such as issues with monitoring Kubernetes resources, object invocation, or pegging of metrics.	This event is raised whenever an internal error occurs, such as issues with monitoring Kubernetes resources, object invocation, pegging of metrics, and similar operations.	Check the logs. For any assistance, contact My Oracle Support .
	INITIALIZATION_FAILURE	OSCP-LMG-INTRNL-EV002	This event is raised whenever an exception occurs while reading the property file.	This event is raised whenever an exception occurs while reading the application properties file.	Check the logs for more detailed information about the issue in the application.properties file. For any assistance, contact My Oracle Support .
	MISCELLANEOUS	OSCP-LMG-INTRNL-EV003	This event is raised whenever an exception occurs while creating Load Manager queue configurations.	This event is raised whenever an exception occurs while enqueueing a task to the event queue.	Check the logs. For any assistance, contact My Oracle Support .
	CONVERSION_FAILURE	OSCP-LMG-INTRNL-EV004	This event is raised whenever an exception occurs while monitoring the queue size of the Load Manager queue configurations.	This event is raised whenever an exception occurs related to the queue size issue.	Check the queue size and collect the logs for more information.
DATA_SYNC	CONFIG_UPDATE	OSCP-LMG-DATSYN-EV001	This event is raised whenever SCP encounters a virtual service with empty or null hosts.	This event is raised whenever SCP encounters a virtual service with empty or null hosts.	Check the logs. For any assistance, contact My Oracle Support .
	INVALID_DATA	OSCP-LMG-DATSYN-EV002	This event is raised whenever invalid configuration data is received or when required parameters are missing in the configuration.	This event is raised whenever invalid configuration data is received or when parameters are missing in the configuration.	Check the logs. For any assistance, contact My Oracle Support .

Table 3-32 (Cont.) Log Levels for SCP-Load-Manager

Category	Event	EventID	Description	Cause	Action
	CONFIG_DATA_PARSE	OSCP-LMG-DATSYN-EV003	This event is raised whenever a failure occurs while parsing the received configuration data.	This event is raised whenever a failure occurs while parsing the following received configuration data: - SystemOptionsClient - ScpFeatures - ScpServiceConfigs - OciConfig - OciThresholdConfig - EngConfig - CongestionControlConfig	Check the database records and collect the logs for more detailed information. For any assistance, contact My Oracle Support .
	SSE_FAILURE	OSCP-LMG-DATSYN-EV004	This event is raised when the connection to the server cannot be established during the startup of the Load Manager.	This event is raised when the connection to the Notification service fails during application startup.	Check the connectivity for the Routing Option Client and collect the logs for more details.
CACHE	CACHE_INITIALIZATION	OSCP-LMG-CACHEF-EV001	This event is raised whenever cache initialization fails.	This event is raised whenever cache initialization fails.	Check the logs. For any assistance, contact My Oracle Support .
	CACHE_READ_WRITE_FAILURE	OSCP-LMG-CACHEF-EV002	This event is raised whenever an exception occurs during a read or write operation on the cache data.	This event is raised whenever an exception occurs while reading, writing, or updating cache data.	Check the logs. For any assistance, contact My Oracle Support .
	CACHE_INVALID_OR_EMPTY_DETAILS	OSCP-LMG-CACHEF-EV003	This event is raised when incorrect or empty data is received from the cache.	This event is raised when incorrect or empty data is received from the cache.	Check the logs. For any assistance, contact My Oracle Support .
HEALTH_CHECK	THREAD_STATUS	OSCP-LMG-HLTCHK-EV001	This event is triggered when an ongoing thread operation is interrupted.	This event is triggered when an ongoing thread operation is interrupted.	Check the logs for more detailed information.

The following table describes log levels for SCP-Cache for various event types:

Table 3-33 Log Levels for SCP-Cache

Category	Event	EventID	Description	Cause	Action
READINESS_FAILURE	HEALTH_CHECK_FAILED	OSCP-CCH-RDYNES-EV001	This event is raised when the cache readiness probe fails.	This event occurs when: - the Coherence cache storage is enabled and the pod count obtained is zero. - the Coherence cache initialization fails. - the Global Rate Limit coherence cache initialization fails.	Check the logs. For any assistance, contact My Oracle Support .

Table 3-33 (Cont.) Log Levels for SCP-Cache

Category	Event	EventID	Description	Cause	Action
LIVENESS_FAILURE	HEALTH_CHECK_FAILED	OSCP-CCH-LIVENESS-EV001	This event is raised when the cache liveness probe fails.	This event occurs due to the cache liveness and liveness recovery failure.	Check the logs. For any assistance, contact My Oracle Support .
INTERNAL	INTERNAL_ERROR	OSCP-CCH-INTRNL-EV001	This event is raised when any internal error occurs in the cache.	This event occurs due to internal error while pegging metrics.	Check the logs. For any assistance, contact My Oracle Support .
	INITIALIZATION_FAILURE	OSCP-CCH-INTRNL-EV002	This event is raised when any exception occurs while reading the application property file.	This event occurs when any exception occurs while reading the application properties file.	Check the logs for detailed information about issue in the application.properties file. For any assistance, contact My Oracle Support .
	MISCELLANEOUS	OSCP-CCH-INTRNL-EV003	This event is raised when any exception occurs while populating the cache queue configs.	This event occurs when the cache queue configs are not populated.	Check the logs. For any assistance, contact My Oracle Support .
	CONVERSION_FAILURE	OSCP-CCH-INTRNL-EV004	This event is raised when any exception occurs while monitoring the cache executor queues.	This event occurs when the cache executor queue monitoring fails.	Check the logs. For any assistance, contact My Oracle Support .
DATA_SYNC	INVALID_DATA	OSCP-CCH-DATSYN-EV001	This event is raised when any invalid SSE is received.	This event occurs when an invalid SSE is received.	Check the logs. For any assistance, contact My Oracle Support .
	CONFIG_DATA_PARSE	OSCP-CCH-DATSYN-EV002	This event is raised when any failure occurs while parsing the received SSE data.	This event is raised when any failure occurs while parsing the received SSE data which are as follows: - ScpFeatures - ScpServiceConfigs - SystemOptionsClient	Check the logs. For any assistance, contact My Oracle Support .
CACHE	CACHE_INITIALIZATION_FAILURE	OSCP-CCH-CACHEF-EV001	This event is raised when the cache initialization has failed.	This event occurs when the Coherence cache initialization fails.	Check the logs. For any assistance, contact My Oracle Support .
	CACHE_READ_WRITE_FAILURE	OSCP-CCH-CACHEF-EV002	This event is raised when any exception occurs while performing read or write operation on the Cache data.	This event is raised when the following operations fail: - Populating the local config data into the global config cache. - Populating the global config cache data into the local config.	Check the logs. For any assistance, contact My Oracle Support .

Table 3-33 (Cont.) Log Levels for SCP-Cache

Category	Event	EventID	Description	Cause	Action
	CACHE_EVENT_HANDLING_FAILURE	OSCP-CCH-CACHEF-EV003	This event is raised when any exception occurs while handling local or global config cache update.	This event occurs due to the failure of handling of local or global config cache update.	Check the logs. For any assistance, contact My Oracle Support .
	INITIALIZATION_ALREADY_DONE	OSCP-CCH-CACHEF-EV004	This event indicates initialization of the component is complete	This is not an error log, so no cause is available.	Not Applicable
	INITIALIZING	OSCP-CCH-CACHEF-EV005	This event indicates that the initialization of the component has started.	This is not an error log, so no cause is available.	Not Applicable
ACCESS_TOKEN	INVALID_OR_EMPTY_DATA_RECEIVED	OSCP-CCH-ACSTKN-EV001	This event is raised when an invalid or empty data is received in the cache event.	This event occurs when an invalid or empty data is received in the cache event.	Check the logs. For any assistance, contact My Oracle Support .
HEALTH_CHECK	THREAD_STATUS	OSCP-CCH-HLTCHK-EV001	This event is raised when any thread is stuck.	This event occurs when the thread is blocked in some operation for a long duration.	Check the logs. For any assistance, contact My Oracle Support .
GLOBAL_RATE_LIMIT	INTERNAL_ERROR	OSCP-CCH-GBLRLF-EV001	This event is raised when an exception occurs due to some miscellaneous reasons while performing operations for Global Rate Limit.	This event occurs when an exception occurs while Global Rate Limiting rate calculation update and reporting.	Check the logs. For any assistance, contact My Oracle Support .
	DATA_READ_FAILURE	OSCP-CCH-GBLRLF-EV002	This event is raised when any exception occurs while performing read operation on Global Rate Limit Cache.	This event is raised when any exception occurs while performing the following operations: • Fetching remote SCP data to populate the local data structure. • Adjusting the rate calculator data on config update.	Check the logs. For any assistance, contact My Oracle Support .
	DATA_WRITE_FAILURE	OSCP-CCH-GBLRLF-EV003	This event is raised when any exception occurs while performing write operation on Global Rate Limit Data.	This event occurs when any exception occurs while populating rate limiting data in the global cache.	Check the logs. For any assistance, contact My Oracle Support .
	FEDERATION_CONFIG_CACHE_EVENT_RECEIVED	OSCP-CCH-GBLRLF-EV004	This event indicates the successful receipt of the config changes of federation cache event.	This is not an error log, so no cause is available.	Not Applicable

Table 3-33 (Cont.) Log Levels for SCP-Cache

Category	Event	EventID	Description	Cause	Action
	LOCAL_CONFIG_CACHE_EVENT_RECEIVED	OSCP-CCH-GBLRLF-EV005	This event indicates the successful receipt of the config changes of the local cache event.	This is not an error log, so no cause is available.	Not Applicable
	TOKEN_CONSUMPTION_FAILURE	OSCP-CCH-GBLRLF-EV006	This event is raised when rate quota control fails for Global Rate Limit.	This event occurs due to the rate quota control failure.	Check the logs. For any assistance, contact My Oracle Support .
	HIGH_TOKEN_CONSUMPTION_DETECTED	OSCP-CCH-GBLRLF-EV007	This event is raised when a high rate quota control is detected for Global Rate Limit.	This event occurs when the rate quota control value is more than the configured rate.	Check the logs. For any assistance, contact My Oracle Support .
	INVALID_TOKEN_CONSUMPTION_VALUE_DETECTED	OSCP-CCH-GBLRLF-EV008	This event is raised when an invalid or negative value is detected for rate quota control.	This event occurs when the rate quota control value is negative.	Check the logs. For any assistance, contact My Oracle Support .
	INITIALIZATION_ALREADY_DONE	OSCP-CCH-GBLRLF-EV009	This event indicates that initialization of the component is complete.	This is not an error log, so no cause is available.	Not Applicable
	INITIALIZING	OSCP-CCH-GBLRLF-EV010	This event indicates that initialization of the component has started.	This is not an error log, so no cause is available.	Not Applicable
REMOTE_SCP_PARTICIPANT_MANAGEMENT	INTERNAL_ERROR	OSCP-CCH-RSCPPM-EV001	This event is raised when an exception occurs while managing the remote SCP participant state.	This event occurs when an exception occurs while invoking REST APIs to manage the remote SCP participant state.	Check the logs. For any assistance, contact My Oracle Support .
	SCHEDULER_INITIALIZATION_FAILURE	OSCP-CCH-RSCPPM-EV002	This event is raised when an exception occurs while starting the scheduler for the remote SCP participant state management.	This event occurs when an exception occurs while scheduling tasks for the remote SCP participant state management.	Check the logs. For any assistance, contact My Oracle Support .
	INVALID_OR_EMPTY_STATE_RESPONSE	OSCP-CCH-RSCPPM-EV003	This event is raised when an invalid or empty state is found for the remote SCP participants.	This event occurs when an invalid or empty state is found for the remote SCP participants.	Check the logs. For any assistance, contact My Oracle Support .

Table 3-33 (Cont.) Log Levels for SCP-Cache

Category	Event	EventID	Description	Cause	Action
	DUPLICATE_CONFIG_FOUND	OSCP-CCH-RSCPPM-EV004	This event is raised when a duplicate configuration is found for the remote SCP participants.	This event occurs when a duplicate configuration is found either between two remote SCP participants or between a remote SCP participants and a local SCP participant configuration.	- Ensure that the Global Rate Limit feature is enabled. - Check whether the clusterName and NFInstanceID of local SCP and remote SCPs are not duplicate. - Check whether the clusterName and NFInstanceID of the first remote SCP and the second remote SCP are not duplicate.
	ERROR_RESPONSE_RECEIVED	OSCP-CCH-RSCPPM-EV005	This event is raised whenever error response received while managing remote SCP participant.	This event occurs when a failure response is received for a REST API query of a remote SCP participant.	Check the logs. For any assistance, contact My Oracle Support .
	EMPTY_RESPONSE_DATA_RECEIVED	OSCP-CCH-RSCPPM-EV006	This event is raised when an empty response is received while fetching remote SCP participant state.	This event occurs when an empty response is received for a REST API query of a remote SCP participant state.	Check the logs. For any assistance, contact My Oracle Support .
	REPLICATE_ALL_COMMAND_FAILURE	OSCP-CCH-RSCPPM-EV007	This event is raised when a failure response is received while replicating cache data to remote SCP participant.	This event occurs when a failure response is received while replicating the cache data to the remote SCP participant.	Check the logs. For any assistance, contact My Oracle Support .
	STATE_CHANGED_SUCCESSFULLY	OSCP-CCH-RSCPPM-EV008	This event indicates a successful update of the state for remote SCP participant.	This is not an error log, so no cause is available.	Not Applicable
	REPLICATE_ALL_COMMAND_SUCCESSFULLY_SUBMITTED	OSCP-CCH-RSCPPM-EV009	This event indicates a successful replication of all cache data to the remote SCP participant.	This is not an error log, so no cause is available.	Not Applicable
	PARTICIPANT_REMOVED_FROM_ACTIVE_SET	OSCP-CCH-RSCPPM-EV010	This event is raised when a remote SCP participant's NFInstanceID is removed from the active NF instance ID set, which is already operational.	This event occurs when the remote SCP participant's state changes to unhealthy. Its NFInstanceID is removed from the active NF instance ID set.	Not Applicable

Table 3-33 (Cont.) Log Levels for SCP-Cache

Category	Event	EventID	Description	Cause	Action
	PARTICIPANT_ADDED_TO_ACTIVE_SET	OSCP-CCH-RSCPPM-EV011	This event is raised when the remote SCP participant's NFInstanceID is added to the active NF instance ID set.	This event occurs when the remote SCP participant's state changes to healthy. Its NFInstanceID is added to the active NF instance ID set.	Not Applicable
	ALREADY_ACTIVE_PARTICIPANT_ADDED_TO_ACTIVE_SET	OSCP-CCH-RSCPPM-EV012	This event indicates addition of already present remote SCP participant's NFInstanceID is again added to the active NFInstanceID set.	This event occurs when a remote SCP participant is healthy, but its NFInstanceID is not present in an active NF instance ID set.	Not Applicable
	INITIALIZATION_ALREADY_DONE	OSCP-CCH-RSCPPM-EV013	This event indicates that initialization of the component is complete.	This is not an error log, so no cause is available.	Not Applicable
	INITIALIZING	OSCP-CCH-RSCPPM-EV014	This event indicates that initialization of the component has started.	This is not an error log, so no cause is available.	Not Applicable
GLOBAL_RATE_LIMIT_CONFIG_AUDIT	INITIALIZATION_FAILURE	OSCP-CCH-GBRLCA-EV001	This event is raised when an exception occurs when an initialization has failed for the Global Rate Limit Config audit.	This event occurs when a periodic Global Rate Limiting Config audit initialization fails.	Check the logs. For any assistance, contact My Oracle Support .
	READ_WRITE_FAILURE	OSCP-CCH-GBRLCA-EV002	This event is raised when an exception occurs while performing a periodic Global Rate Limiting Config audit.	This event occurs when a periodic Global Rate Limiting Config audit fails.	Check the logs. For any assistance, contact My Oracle Support .
	INITIALIZATION_ALREADY_DONE	OSCP-CCH-GBRLCA-EV003	This event indicates that initialization of the component is complete.	This is not an error log, so no cause is available.	Not Applicable
	INITIALIZING	OSCP-CCH-GBRLCA-EV004	This event indicates that initialization of the component has started.	This is not an error log, so no cause is available.	Not Applicable

Table 3-34 Log Levels for SCPC-Configuration

Category	Event	EventID	Description	Cause	Action
INTERNAL	TASK_FAILURE	OSCP-CONFIG-01-001	This event is raised when a configuration task fails.	This event is raised due to internal errors, resource constraints, timeouts, or unexpected exceptions during task initialization.	Check the logs. For any assistance, contact My Oracle Support .

Table 3-34 (Cont.) Log Levels for SCPC-Configuration

Category	Event	EventID	Description	Cause	Action
	TASK_COMPLETED	OCSCP-CONFIG-01-002	This event is raised when a configuration task is complete.	This event is raised when an SCP configuration task is marked as completed after receiving an event of type TASK_COMPLETED and updating its status in the database.	Check the logs. For any assistance, contact My Oracle Support .
	TASK_ABORT	OCSCP-CONFIG-01-003	This event is raised when a configuration task is aborted before completion.	This event is raised when an SCP configuration task is aborted, indicating that the task was terminated before completion due to a failure or abort condition during processing.	Check the logs. For any assistance, contact My Oracle Support .
	TASK_SUBMITTED	OCSCP-CONFIG-01-004	This event is raised when a configuration task is submitted for processing.	This event is raised when an SCP configuration task is placed in the task queue with status SUBMITTED, indicating that the task has been received and is awaiting processing.	Check the logs. For any assistance, contact My Oracle Support .
	SCP_PROFILE_IMMUTABLE_FIELD_MISMATCH	OCSCP-CONFIG-01-005	This event is raised when a Helm-provided SCP profile attempts to change immutable SCP profile fields after the profile already exists.	The received SCP profile differs from the stored profile for immutable fields such as nfnInstanceid, fqdn, or scpPorts. The stored values are retained.	Verify the Helm values and SCP profile configuration. Keep immutable fields consistent with the existing SCP profile, or recreate/re-register the profile if the identity or port change is intentional.

Table 3-35 Log Levels for SCPC-Subscription

Category	Event	EventID	Description	Cause	Action
DATA_SYNC	CONFIG_DATA_PARSE	OCSCP-SUB-DATSYN-EV001	This event is raised when any failure occurs while parsing OCSCP Routing Config Set.	This event is raised when any failure occurs while parsing the following received Config data: RountingOptions.	Check the logs. For any assistance, contact My Oracle Support .
REGISTRATIONS	DEREGISTER	OCSCP-SUB-REG-EV001	This event is raised when SCPC-Subscription marks registered NRF set IDs for SCP deregistration.	SCP service status changed to DEREGISTERED or OUT_OF_SERVICE, so all currently registered NRF set IDs are selected for deregistration in the next registration processor cycle.	Check the logs. For any assistance, contact My Oracle Support .

Table 3-36 Log Levels for SCP-nrfProxy-oauth

Category	Event	Event ID	Description	Cause	Action
DOWN_STREAM	COMPLETED_EXCEPTIONALLY	OCSCP-NOA-DWNSTR-EV001	This event is raised when a task completes exceptionally.	This event is raised when an exception occurs or an asynchronous call fails during the processing of an OAuth access token request.	Check the logs. For any assistance, contact My Oracle Support .
	HEADER_DECODE	OCSCP-NOA-DWNSTR-EV002	This event is raised when an error occurs while decoding message or HTTP headers.	This event is raised when an exception occurs while decoding or processing HTTP headers related to OAuth access token requests.	Check the logs. For any assistance, contact My Oracle Support .
	URI_FORMATION	OCSCP-NOA-DWNSTR-EV003	This event is raised when an error occurs during the formation or creation of a URI.	This event is raised when an error or exception occurs while forming or constructing a URI for OAuth token operations or related requests.	Check the logs. For any assistance, contact My Oracle Support .
	UNEXPECTED_CACHE_EVENT	OCSCP-NOA-DWNSTR-EV004	This event is raised when an unexpected cache event is observed.	This event is raised when an unexpected or invalid cache event occurs for a given access token state during OAuth processing.	Check the logs. For any assistance, contact My Oracle Support .
INTERNAL	GENERIC	OCSCP-NOA-INTRNL-EV001	This event is raised to capture generic errors not classified under specific event categories.	This event is raised when a general exception or unexpected error occurs during OAuth processing that does not fall under a more specific error category	Check the logs. For any assistance, contact My Oracle Support .
	JSON_PROCESSING	OCSCP-NOA-INTRNL-EV002	This event is raised when a JSON processing exception occurs, such as failure to parse, serialize, or deserialize JSON data.	This event is raised when an exception occurs during JSON serialization or deserialization while processing OAuth responses or requests.	Check the logs. For any assistance, contact My Oracle Support .
UP_STREAM	RESPONSE_ALREADY_COMPLETED	OCSCP-NOA-UPSTR-EV001	This event is raised when an attempt is made to complete a CompletableFuture that has already been completed, indicating a possible logic or concurrency error.	This event is raised when an attempt is made to send a response for an OAuth request after the response future has already been completed or expired.	Check the logs. For any assistance, contact My Oracle Support .
DATA_SYNC	CONFIG_DATA_PARSE	OCSCP-NOA-DATSYN-EV001	This event is raised when SCP fails parsing SCP service Config.	This event is raised when any exception occurs while parsing configuration data received from an external source or SSE event.	Check the logs. For any assistance, contact My Oracle Support .
HEALTH_CHECK	THREAD_STATUS	OCSCP-NOA-HLTCHK-EV001	This event is raised when there is an issue with the status of one or more threads involved.	This event is raised when an exception occurs related to thread status or thread interruption during cache initialization or health check operations.	Check the logs. For any assistance, contact My Oracle Support .
CACHE	INITIALIZATION	OCSCP-NOA-CACHEF-EV001	This event is raised when a failure occurs during the post-construction phase.	This event is raised when any exception occurs during the initialization of the OAuth access token cache or its related components.	Check the logs. For any assistance, contact My Oracle Support .

Table 3-36 (Cont.) Log Levels for SCP-nrfProxy-oauth

Category	Event	Event ID	Description	Cause	Action
	CACHE_INITIALIZATION	OCSCP-NOA-CACHEF-EV002	This event is raised when there is an error during the initialization of the cache.	This event is raised when an exception occurs during the initialization of the coherence cache in the OAuth access token cache manager.	Check the logs. For any assistance, contact My Oracle Support .
	CACHE_MS_COHS_SERVICE_AVAILABILITY_CHECK_FAILURE	OCSCP-NOA-CACHEF-EV003	This event is raised when SCP fails to verify the availability of the SCP-Cache coherence service.	This event is raised when an exception occurs while checking the availability of storage-enabled cache members in the coherence service.	Check the logs. For any assistance, contact My Oracle Support .

The following table describes log levels for common services for various event types:

Note

The following logs are from common library, and the service printing these logs owns them.

Table 3-37 Log Levels for Common Library

Category	Event	EventID	Description	Cause	Action
INTERNAL	MISCELLANEOUS	OCSCP-COMM-01-001	This event is raised when an exception occurs during the get, put, post, or delete REST API call to internal microservices.	This event is observed when an exception occurs while sending a request to internal microservices using scpInterPodCommWebClient due to a network error or pod unavailability.	Ensure that the pods are deployed and reachable from other internal pods.
ROUTING_OPTION_S_MATCH	ROUTING_OPTION_S_MATCH_LAYER	OSCP-COM-02-001	This event is raised when an exception occurs during create, delete, or match operations in routing options matching.	This event is observed when an exception occurs during create, delete, or match operations in routing options matching.	Check the logs. For any assistance, contact My Oracle Support .
PROFILE_PROCESSING	ROAMING_PROXY_RULE_PROCESSING_FAILURE	OSCP-COM-05-001	This event is raised when an exception occurs while populating custom roaming proxy profile attributes during profile processing.	This event is observed when an exception occurs while populating custom roaming proxy profile attributes during profile processing.	Check the logs. For any assistance, contact My Oracle Support .

Managing Verbose Logging

Enable

This feature is enabled automatically at the time of SCP deployment.

Configure

There is no specific configuration required for this feature.

Support for the Trace log level has been introduced for the SCPC-Notification, SCPC-Audit, SCP-Load-Manager, and SCP-Cache microservices. For more information, see the [Configuring Global Options](#) section and the "Configuring Dynamic Logging" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

There is no specific metrics and alerts required for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).


3.26 Support for OAuth2.0

Access tokens are credentials used by consumer NFs to access protected resources provided by producer NFs. These credentials are issued by NRF. These tokens represent specific scope and duration of access. SCP supports OAuth2.0 (Open Authorization) access tokens in 5G indirect communication models such as Model C and Model D.

In the 5G SBI Model D indirect communication (with delegated discovery) mode, SCP obtains access tokens from NRF for 5G SBI message requests except notification or callback messages. SCP uses the acquired access tokens to forward SBI message requests to the selected producer NFs.

The following call flow represents how SCP obtains access tokens from NRF:

Figure 3-6 SCP Obtains Access Tokens from NRF

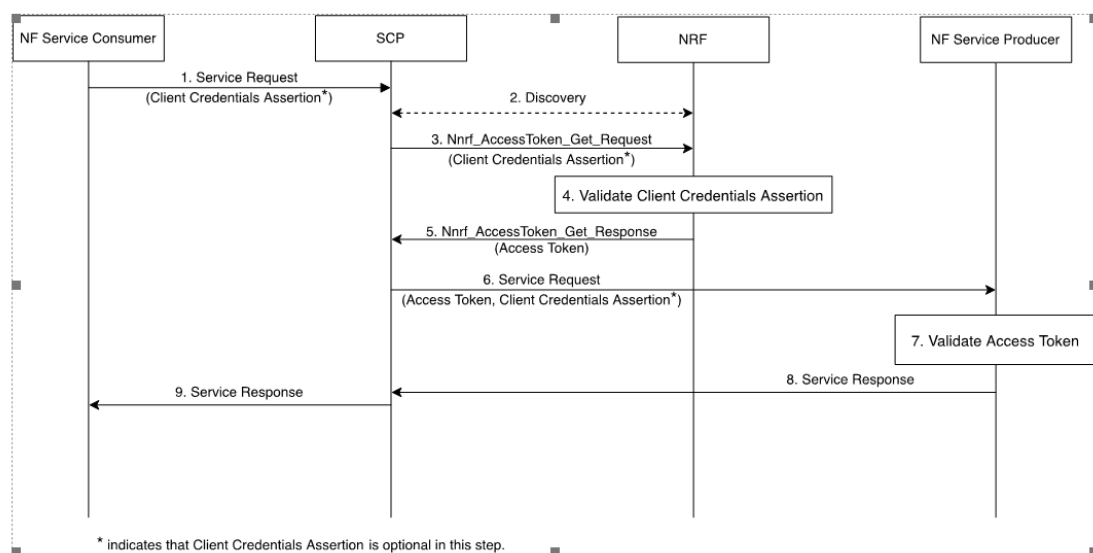


The above mentioned call flow describes the process to use the Discovery parameter to send a request to NRF for obtaining the access token:

1. NF Service Consumer sends a service request to SCP.
2. If SCP does not get an access token in the service request, it uses the Discovery parameter to send the access token request to NRF.
3. SCP sends Nnrf_AccessToken_Get_Request to NRF.
4. NRF validates the access token request using Client Credential Assertion (CCA).
5. NRF sends Nnrf_AccessToken_Get_Response to SCP.
6. SCP forwards the service request, along with CCA and access token, to NF Service Producer.
7. NF Service Producer validates the access token.
8. NF Service Producer sends the service response to SCP.
9. SCP relays the service response to NF Service Consumer.

In the 5G SBI Model C indirect communication (without delegated discovery) mode, consumer NFs obtain access tokens from NRF except notification or callback messages. SCP uses the access tokens received from consumer NFs and forward SBI message requests to the selected producer NFs.

The following call flow represents how NF Service Consumer obtains access tokens from NRF:

Figure 3-7 NF Consumer Obtains Access Tokens from NRF

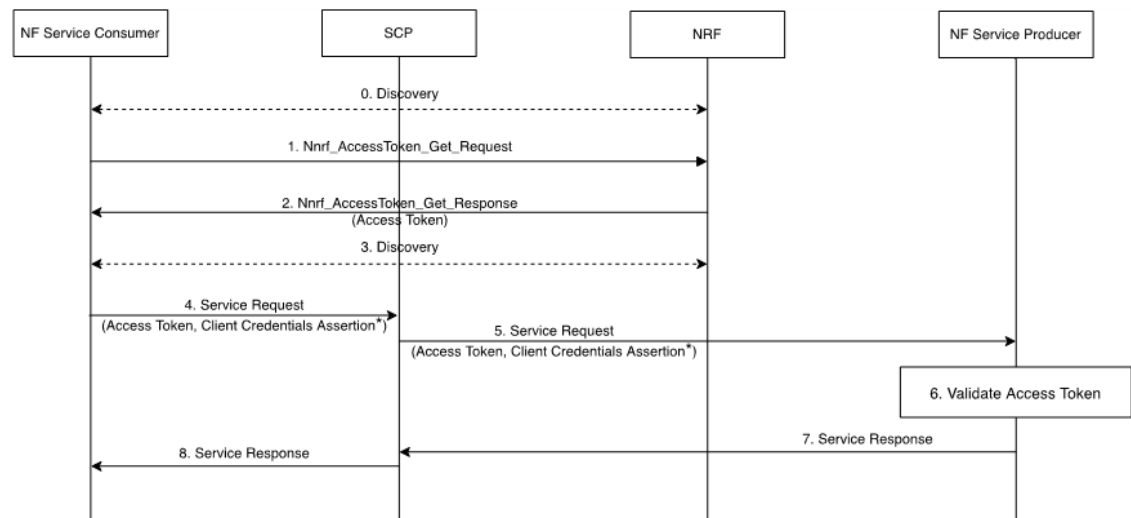

* Indicates that Client Credentials Assertion is optional in this step.

The above mentioned call flow describes the process that NF Service Consumer uses to obtain access token from NRF and how SCP uses this access token to forward the service request.

1. When there is no mutual authentication between NF Service Consumer and NRF, NF Service Consumer sends Nnrf_AccessToken_Get_Request to NRF.
2. NRF sends Nnrf_AccessToken_Get_Response to NF Service Consumer.
3. NF Service Consumer sends Discovery service requests to NRF.

4. After receiving the discovery response with NF profiles, NF Service Consumer sends the service request to SCP.
5. SCP uses the access token received from NF Service Consumer and forwards the service request, along with CCA and access token, to NF Service Producer.
6. NF Service Producer validates the access token.
7. NF Service Producer sends the service response to SCP.
8. SCP relays the service response to NF Service Consumer.

Note

SCP supports 5G SBI Client Credentials Assertion (CCA) custom header for Model C and Model D indirect communication routing. It is an optional header that can be sent by consumer NFs, along with the service request for enabling consumer NFs authentication. For more information about CCA header, see [Support for the Client Credentials Assertion Header](#).

This feature enables SCP to perform the following tasks:

- SCP determines the status of OAuth2 support of producer NFs deployed in the network using the following:
 - Learnt 5G NF service topology from NRF
 - NF discovery response during delegated service request
 - Configurations at SCP
- In Model D indirect communication, SCP is responsible for access token lifecycle (initiate, maintain, and delete). SCP caches the access tokens and reuses them during initial, subsequent, or alternate routing.
- SCP validates access tokens as per the configuration.
- SCP returns the access token received from NRF to consumer NFs using the "3gpp-Sbi-Access-Token" header.
- SCP determines service level scope information in the access token from the "3gpp-Sbi-Access-Scope" header
- SCP regulates and avoids duplicate access token requests for the same consumer NF and producer NF pair.
- SCP supports OAuth2.0 in inter-SCP scenarios.
- SCP proactively attempts to refresh the access tokens when required.
- SCP supports NF type and NF instance type of access tokens.

SCP has introduced the SCP-nrfProxy-Oauth microservice to manage requests initiated to NRF for its nnrf-oauth2 service that considers various parameters as body and CCA header to provide an authentication token as response to the consumer NF. This microservice interacts with SCP-Worker when it receives request from SCP-Worker. When SCP-Worker initiates the access token request to NRF, OAuth2.0 service sends a request to SCP-Worker with NRF details in the routing binding header. Coherence cache is integrated with this service where the values of tokens are stored based on the cache configuration at SCP. To avoid duplicate requests to NRF, an internal cache is also maintained. This service is capable of handling various states of access tokens received, such as expiration, and acts accordingly.

Managing Support for OAuth2.0

Enable

By default, this feature is disabled. To enable this feature, do the following tasks:

1. Set the `nrfProxyOAuthService Helm` parameter to `true` in the `ocscp_values.yaml` file.
2. Set the `oauth2_support` option to `true` as described in [Configuring SCP Features](#).

Configure

You can configure this feature using Helm, REST APIs, and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Features](#) and [OAuth2.0 Configurations](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features", "Configuring NRF", "Configuring OAuth2.0 Access Token Granularity", and "Configuring OAuth2.0 Local PLMN Required" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **Configure using Helm:** For information about configuring the `SCP-nrfProxy-oauth` microservice, see "SCP-nrfProxy-oauth Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_oauth_access_token_cache_match_total`
- `ocscp_worker_access_token_forwarded_in_tx_res_total`
- `ocscp_worker_access_token_forwarded_in_tx_req_total`
- `ocscp_worker_access_token_cache_match_total`
- `ocscp_nrf_oauth_error_counts_total`
- `ocscp_oauth_access_token_tx_rsp_total`
- `ocscp_oauth_access_token_rx_res_total`
- `ocscp_oauth_access_token_tx_req_total`
- `ocscp_oauth_access_token_rx_req_total`
- `ocscp_worker_access_token_rx_res_total`
- `ocscp_worker_access_token_tx_req_total`

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.27 Pod Overload Control

SCP processes 5G Service Based Interface (SBI) messages using its microservices. To protect scp-worker pods from the overload, SCP has introduced the Pod Overload Control feature.

This feature throttles only ingress 5G SBI message requests based on:

- CPU utilization of the scp-worker microservice pods.
- Pending Transactions for which responses from producer NFs are awaited by SCP.

SCP provides the following pod overload configurations for scp-worker:

- Pod Overload Action Policy: To configure action to be taken by scp-worker pods for CPU overload.
- Pod Overload Control Policy: To configure CPU and pending transactions onset threshold, abatement threshold, and abatement time for scp-worker.
- Pod Overload Discard Policy: To configure the percentage of messages to be discarded based on the discardPercentage parameter or discard messages based on the sbiMsgPriorityDiscardFrom parameter.

For more information about the aforementioned configurations, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

When CPU utilization or pending transactions of the scp-worker pod exceeds the configured threshold level, SCP responds based on the configured overload Action Policy as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Message Priority

SCP assigns and updates the "3gpp-Sbi-Message-Priority" header to prioritize ingress 5G SBI messages during the overload control task. For more information about message priority, see [Message Priority Assignment and Override](#).

Recommendations

SCP uses the Pod Overload Control feature for service availability and proper performance. To achieve backward compatibility after the upgrade, SCP disables this feature.

It is recommendation to enable the Pod Overload Control feature in the deployment environment. If this feature is disabled, it might lead to:

- network traffic stability due to higher traffic load, bursty traffic, higher latency, or slow producers.
- an increase in latency for 5G SBI messages.
- an increase in end-to-end transaction failure count.
- congestion or overload of SCP service pods, which could cause undesirable behaviors such as cascading failures.

Instead of disabling the feature, you can modify configuration parameters, such as onset or abatement thresholds, discard policy aggressiveness, and so on, to match required traffic patterns, including maximum bursts in a 5G core network. For example, the default SCP values are updated to control up to twice the rated capacity of an SCP Worker pod.

Managing Pod Overload Control

Enable

This feature is enabled automatically in SCP at the time of deployment.

Configure

You can configure the Pod Overload Control feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about 5G SBI message priority and pod overload policies configurations, see [Configuring Pod Overload Control Policies](#) and [Configuring SBI Message Priority](#).
- **Configure using REST API:** For information about 5G SBI message priority and pod overload policies configurations, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about metrics, see [Metrics](#).

The following alerts are added in the [Alerts](#) section:

- [SCPCPUUsageFileReadFailed](#)
- [SCPCGroupVersionDetectionFailed](#)

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.28 Host Preference for Egress Message Requests

Although Fully Qualified Domain Name (FQDN) is present in the ingress message requests, SCP uses IP as the host in the egress message request if IP is present in the learned Network Function (NF) profile of the producer NF.

Using the Host Preference for Egress Message Requests feature, SCP can determine the host type to be included in the egress messages. SCP uses one of the host types such as FQDN or IP, in the egress message request.

The host type in the egress message request is determined by the following:

- 3gpp-Sbi-Target-apiRoot header
- hostPreference of egress_host_preference as described in the "Configuring SCP Features" section of *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*
- Learned NF profile from NRF

If the 3gpp-Sbi-Target-apiRoot header is present in the ingress message request, the host type is determined by the `hostPreference.request.apiRootHdrPresent` REST API parameter. If

this parameter value is set to `passThrough`, which is the default value, SCP uses the same type of host in the egress message request as received through the ingress message request. For more information about the `hostPreference.request.apiRootHdrPresent` REST API parameter, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

If the `3gpp-Sbi-Target-Apiroot` header is absent in the ingress message request, SCP uses the `hostPreference.request.apiRootHdrNotPresent` REST API configuration to determine the host type. By default, SCP uses IP as the host type.

In case of alternate routing or reselection, SCP determines the host type of another equivalent producer NF by using the same method as used for the target producer NF.

If the selected host type is FQDN, SCP provides the `fqdnResolution.fqdn` REST API parameter to choose whether to resolve the FQDN in the egress message request with the IPs (from IP Endpoints) present in learned NF profiles of the target producer NF or trigger a Domain Name System (DNS) query.

SCP tries to get the same host type as configured in the `hostPreference` REST API parameter, however, if the corresponding information such as FQDN or IP, is unavailable, then SCP uses other available information for routing.

Managing Host Preference for Egress Message Requests

Enable

By default, this feature is disabled. To enable this feature, you must complete the configuration as described in the following configuration section.

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Features](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_fqdn_resolution_total`
- `ocscp_worker_interplmn_fqdn_resolution_total`
- `ocscp_worker_http_req_host_type_total`

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.29 Enhanced 5G SBI Message Failure Handling

SCP adds server header to all SCP generated error responses as defined in 3GPP TS 29.500. SCP forwards error responses received from producer NFs to consumer NFs without modifying the server header. In case of alternate routing, SCP forwards the last received error response to the consumer NF.

In SCP 1.15.0, the 5G SBI Message Failure Handling functionality is enhanced to enable SCP to send information of all the routing attempts made on producer NFs by SCP. The server header format is enhanced to include all the routing information while forwarding error responses with server header to consumer NFs.

The server header format includes information of all the attempted producer NFs in the reverse order of attempts made. For example: If NF1 and NF2 are attempted in that order, the server header formats are:

- In forwarded responses: "Server: <NF2 Type>-<NF2 instance id> <NF1 Type>-<NF1 instance id>"
- In self-generated responses: "Server: SCP-<scp-fqdn> <NF2 Type>-<NF2 instance id> <NF1 Type>-<NF1 instance id>"

In SCP 23.1.0, when SCP does not receive a server header in an error response from a producer NF, SCP adds a server header with its FQDN while forwarding the response to the consumer NF.

SCP generates error responses in the following scenarios:

① Note

The server header, using SCP's own FQDN, will apply to all error responses generated by SCP. This includes errors caused by discards due to ingress or egress rate limiting, pod overload control, destination exhausted, no host, and so on. For more information about error codes generated by SCP, see [Error Codes Generated by SCP](#).

- Connection issue with producer NF: When the producer NF is unhealthy or SCP is unable to establish connection with the producer NF.
- Timeout at SCP: When the producer NF fails to reply to SCP within the specified time as configured in the `responseTimeout` REST API parameter or if the configured `totalTransactionLifetime` expires.
- Service unavailable: When the connection is unavailable between SCP and producer NF.

① Note

If an IP address is provided in the SCP FQDN deployment field, the same is mentioned in the server header introduced by SCP for the above mentioned scenarios.

SCP adds a server header with its FQDN in the error responses received from the service mesh sidecar. The server header format is: "Server": "SCP-<SCP FQDN>".

SCP forwards the server header received in the error response from the producer NF as it is to the consumer NF.

When SCP receives an error response from sidecar or service mesh, then SCP adds a server header with its FQDN and relays them to the consumer NF. SCP detects an error generated by sidecar or service mesh failure when the received response has server header matching one of the configured server header strings in the `sideCarProxyServerHeader` REST API parameter. For example, "envoy", "istio-envoy", and custom string configured in SCP, and the status code in the received error response matches the status code configured in the `sideCarProxyStatusCode` REST API parameter.

SCP appends its FQDN in the server header if it has received a response from at least one producer NF (also known as the last error response), and SCP could not try other NFs due to the following:

- Connection issue, unknown host exception or unknown error
- Service mesh reported errors
- Timeout at SCP
- Received error response from the producer NF without server header

The error response for the above scenarios has the server header as follows: "Server": "SCP-<SCP Fqdn> NfType-<NfInstanceId>".

In SCP 23.2.0, the 5G SBI Message Failure Handling functionality is enhanced. SCP forwards the last or latest error response received from producer NFs to consumer NFs, and server header content is populated with the details of the producer NF from which the error response is received.

SCP does not append SCP FQDN in returned server header to downstream if it has received an error response from at least one producer and SCP could not try other producer NFs due to the following:

- Connection issue, unknown host exception or unknown error
- Service mesh reported errors
- Timeout at SCP
- Received error response from the producer NF without server header

The error response for the above scenarios has the server header as follows: "Server": "NfType-<NfInstanceId>".

The following table describes differences between the server header behavior in SCP 23.1.0 and SCP 23.2.0:

Table 3-38 Implemented Behavior

Scenario	Server Header in SCP 23.1.0	Server Header in SCP 23.2.0
When SCP sends a message request to UDM1, UDM1 sends an error response with a server header. Then, SCP performs alternate routing on UDM2, and a timeout occurs at SCP.	"Server": "SCP-<scp-fqdn> UDM-udm1-instance-id"	"Server": "UDM-udm1-instance-id"

Table 3-38 (Cont.) Implemented Behavior

Scenario	Server Header in SCP 23.1.0	Server Header in SCP 23.2.0
When SCP sends a message request to UDM1, SCP receives an error response from the service mesh or sidecar. Then, SCP performs alternate routing on UDM2 and receives an error response without a server header, and when SCP performs another alternate routing on UDM3, it receives an error response with a server header.	"Server": "SCP-<scp-fqdn> UDM-udm3-instance-id"	"Server": "UDM-udm3-instance-id"

The following table describes the server header behavior in different error scenarios between SCP and producer NFs.

Note

In all the scenarios, SCP attempts to establish connections with producer NFs (UDM1, UDM2, and UDM3) as mentioned in the scenarios.

Example Scenario 19: UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue, and the pod is down.

In the above mentioned scenario and as specified in the note, SCP attempts to establish connection with UDM1 first followed by UDM2, and then UDM3.

The following table describes the server header behavior when the default configuration is as follows:

```
"enableEnhanceServerHeaderBehavior": false,
"addServerHeaderInProducerResponse": false,
"enableEnhanceServerHeaderBehaviorV2": false,
```

Table 3-39 Server Header Behavior 1

Serial No.	Scenario	Server Header Behavior
1	UDM1 and UDM2 services are unavailable.	"Server" : "SCP-<SCP FQDN>"
2	Timeout has occurred at UDM1 and UDM2.	"Server" : "SCP-<SCP FQDN>"
3	UDM1 and UDM2 have generated error responses without server header.	SCP won't add any server header
4	UDM1 and UDM2 have generated error responses with server header.	"Server" : "UDM-udm2-instanceid"

Table 3-39 (Cont.) Server Header Behavior 1

Serial No.	Scenario	Server Header Behavior
5	UDM1 sends an error response without server header and timeout has occurred at UDM2.	SCP won't add any server header
6	UDM1 sends an error response with server header and timeout has occurred at UDM2.	"Server" : "UDM-udm1-instanceid"
7	UDM1 and UDM2 send error responses without server header.	SCP will not add any server header
8	UDM1 and UDM2 send error responses with server header.	"Server" : "UDM-udm2-instanceid"
9	UDM1 sends an error response with server header and UDM2 sends an error response without server header.	SCP will not add any server header
10	UDM1 sends an error response without server header.	SCP will not add any server header
11	UDM1 sends an error response with server header.	"Server" : "UDM-udm1-instanceid"
12	UDM1 sends an error response with server header and UDM2 SCP couldn't do Alternate route due to some issue.	"Server" : "UDM-udm1-instanceid"
13	UDM1 sends an error response without server header and UDM2 SCP couldn't do Alternate route due to some issue.	SCP will not add any server header
14	SCP is unable to connect with UDM1 and UDM2 due to connection issue.	"Server" : "SCP-<SCP FQDN>"
15	Timeout has occurred at UDM1.	"Server" : "SCP-<SCP FQDN>"
16	UDM1, UDM2, and UDM3 send error responses without server header.	SCP will not add any server header
17	UDM1, UDM2, and UDM3 send error responses with server header.	"Server" : "UDM-udm3-instanceid"
18	UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response without server header.	SCP will not add any server header

Table 3-39 (Cont.) Server Header Behavior 1

Serial No.	Scenario	Server Header Behavior
19	UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response with server header.	"Server" : "UDM-udm2-instanceid"
20	UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm1-instanceid"
21	UDM1 sends an error response without server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	SCP will not add any server header
22	Loop detection (508) occurred.	"Server" : "SCP-<SCP FQDN>"
23	UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm1-instanceid"
24	UDM1 Sidecar returns special server headers.	SCP forwards the special server headers as it is to the consumer NF
25	Ingress Rate Limiting: SCP Generates an error message because the ingress rate was more than the allowed rate configured for the consumer as specified by the rules configured in the Ingress Rate Limiter REST API.	"Server" : "SCP-<SCP FQDN>"
26	Pod Overload: SCP-worker pod is overloaded due to CPU overload or pending transactions.	"Server" : "SCP-<SCP FQDN>"
27	OCI: UDM1 SCP doesn't attempt on UDM1 due to 100% OCI UDM2 SCP receives error response with server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
28	OCI: UDM1 SCP doesn't attempt on UDM1 due to 100% OCI. UDM2 SCP doesn't attempt on UDM2 due to 100% OCI.	"Server" : "SCP-<SCP FQDN> UDM-udm2-instanceid UDM-udm1-instanceid"

The following table describes the server header behavior when the default configuration is as follows:

```
"enableEnhanceServerHeaderBehavior": false,
"addServerHeaderInProducerResponse": true,
"enableEnhanceServerHeaderBehaviorV2": false,
```

Table 3-40 Server Header Behavior 2

Serial No.	Scenario	Server Header Behavior
1	UDM1 and UDM2 services are unavailable.	"Server" : "SCP-<SCP FQDN>"
2	Timeout has occurred at UDM1 and UDM2.	"Server" : "SCP-<SCP FQDN>"
3	UDM1 and UDM2 have generated error responses without server header.	"Server" : "UDM-udm2-instanceid"
4	UDM1 and UDM2 have generated error responses with server header.	"Server" : "UDM-udm2-instanceid"
5	UDM1 sends an error response without server header and timeout has occurred at UDM2.	"Server" : "UDM-udm1-instanceid"
6	UDM1 sends an error response with server header and timeout has occurred at UDM2.	"Server" : "UDM-udm1-instanceid"
7	UDM1 and UDM2 send error responses without server header.	"Server" : "UDM-udm2-instanceid"
8	UDM1 and UDM2 send error responses with server header.	"Server" : "UDM-udm2-instanceid"
9	UDM1 sends an error response with server header and UDM2 sends an error response without server header.	"Server" : "UDM-udm2-instanceid"
10	UDM1 sends an error response without server header.	"Server" : "UDM-udm1-instanceid"
11	UDM1 sends an error response with server header.	"Server" : "UDM-udm1-instanceid"
12	UDM1 sends an error response with server header and UDM2 SCP couldn't do Alternate route due to some issue.	"Server" : "UDM-udm1-instanceid"

Table 3-40 (Cont.) Server Header Behavior 2

Serial No.	Scenario	Server Header Behavior
13	UDM1 sends an error response without server header and UDM2 SCP couldn't do Alternate route due to some issue.	"Server" : "UDM-udm1-instanceid"
14	SCP is unable to connect with UDM1 and UDM2 due to connection issue.	"Server" : "SCP-<SCP FQDN>"
15	Timeout has occurred at UDM1.	"Server" : "SCP-<SCP FQDN>"
16	UDM1, UDM2, and UDM3 send error responses without server header.	"Server" : "UDM-udm3-instanceid"
17	UDM1, UDM2, and UDM3 send error responses with server header.	"Server" : "UDM-udm3-instanceid"
18	UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response without server header.	"Server" : "UDM-udm2-instanceid"
19	UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response with server header.	"Server" : "UDM-udm2-instanceid"
20	UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm1-instanceid"
21	UDM1 sends an error response without server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm1-instanceid"
22	Loop detection (508) occurred.	"Server" : "SCP-<SCP FQDN>"
23	UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm1-instanceid"
24	UDM1 Sidecar returns special server headers.	SCP forwards the special server headers as it is to the consumer NF

Table 3-40 (Cont.) Server Header Behavior 2

Serial No.	Scenario	Server Header Behavior
25	Ingress Rate Limiting: SCP Generates an error message because the ingress rate was more than the allowed rate configured for the consumer as specified by the rules configured in the Ingress Rate Limiter REST API.	"Server" : "SCP-<SCP FQDN>"
26	Pod Overload: SCP-worker pod is overloaded due to CPU overload or pending transactions.	"Server" : "SCP-<SCP FQDN>"
27	OCI: UDM1 SCP doesn't attempt on UDM1 due to 100% OCI UDM2 SCP receives error response with server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
28	OCI: UDM1 SCP doesn't attempt on UDM1 due to 100% OCI. UDM2 SCP doesn't attempt on UDM2 due to 100% OCI.	"Server" : "SCP-<SCP FQDN> UDM-udm2-instanceid UDM-udm1-instanceid"

The following table describes the server header behavior when the default configuration is as follows:

```
"enableEnhanceServerHeaderBehavior": true,
"addServerHeaderInProducerResponse": false,
"enableEnhanceServerHeaderBehaviorV2": false,
```

Table 3-41 Server Header Behavior 3

Serial No.	Scenario	Server Header Behavior
1	UDM1 and UDM2 services are unavailable.	"Server" : "SCP-<SCP FQDN>"
2	Timeout has occurred at UDM1 and UDM2.	"Server" : "SCP-<SCP FQDN> UDM-udm2-instanceid UDM-udm1-instanceid"
3	UDM1 and UDM2 have generated error responses without server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
4	UDM1 and UDM2 have generated error responses with server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"

Table 3-41 (Cont.) Server Header Behavior 3

Serial No.	Scenario	Server Header Behavior
5	UDM1 sends an error response without server header and timeout has occurred at UDM2.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
6	UDM1 sends an error response with server header and timeout has occurred at UDM2.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
7	UDM1 and UDM2 send error responses without server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
8	UDM1 and UDM2 send error responses with server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
9	UDM1 sends an error response with server header and UDM2 sends an error response without server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
10	UDM1 sends an error response without server header.	"Server" : "UDM-udm1-instanceid"
11	UDM1 sends an error response with server header.	"Server" : "UDM-udm1-instanceid"
12	UDM1 sends an error response with server header and UDM2 SCP couldn't do Alternate route due to some issue.	"Server" : "UDM-udm1-instanceid"
13	UDM1 sends an error response without server header and UDM2 SCP couldn't do Alternate route due to some issue.	"Server" : "UDM-udm1-instanceid"
14	SCP is unable to connect with UDM1 and UDM2 due to connection issue.	"Server" : "SCP-<SCP FQDN>"
15	Timeout has occurred at UDM1.	"Server" : "SCP-<SCP FQDN> UDM-udm1-instanceid"
16	UDM1, UDM2, and UDM3 send error responses without server header.	"Server" : "UDM-udm3-instanceid UDM-udm2-instanceid UDM-udm1-instanceid"
17	UDM1, UDM2, and UDM3 send error responses with server header.	"Server" : "UDM-udm3-instanceid UDM-udm2-instanceid UDM-udm1-instanceid"
18	UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response without server header.	"Server" : "UDM-udm2-instanceid"

Table 3-41 (Cont.) Server Header Behavior 3

Serial No.	Scenario	Server Header Behavior
19	UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response with server header.	"Server" : "UDM-udm2-instanceid"
20	UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
21	UDM1 sends an error response without server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
22	Loop detection (508) occurred.	"Server" : "SCP-<SCP FQDN>"
23	UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
24	UDM1 Sidecar returns special server headers.	SCP forwards the special server headers as it is to the consumer NF
25	Ingress Rate Limiting: SCP Generates an error message because the ingress rate was more than the allowed rate configured for the consumer as specified by the rules configured in the Ingress Rate Limiter REST API.	"Server" : "SCP-<SCP FQDN>"
26	Pod Overload: SCP-worker pod is overloaded due to CPU overload or pending transactions.	"Server" : "SCP-<SCP FQDN>"
27	OCI: UDM1 SCP doesn't attempt on UDM1 due to 100% OCI UDM2 SCP receives error response with server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
28	OCI: UDM1 SCP doesn't attempt on UDM1 due to 100% OCI. UDM2 SCP doesn't attempt on UDM2 due to 100% OCI.	"Server" : "SCP-<SCP FQDN> UDM-udm2-instanceid UDM-udm1-instanceid"

The following table describes the server header behavior when the default configuration is as follows:

```
"enableEnhanceServerHeaderBehavior": false,
"addServerHeaderInProducerResponse": false,
"enableEnhanceServerHeaderBehaviorV2": true,
```

Table 3-42 Server Header Behavior 4

Serial No.	Scenario	Server Header Behavior
1	UDM1 and UDM2 services are unavailable.	"Server" : "SCP-<SCP FQDN>"
2	Timeout has occurred at UDM1 and UDM2.	"Server" : "SCP-<SCP FQDN>"
3	UDM1 and UDM2 have generated error responses without server header.	"Server" : "SCP-<SCP FQDN>"
4	UDM1 and UDM2 have generated error responses with server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
5	UDM1 sends an error response without server header and timeout has occurred at UDM2.	"Server" : "SCP-<SCP FQDN>"
6	UDM1 sends an error response with server header and timeout has occurred at UDM2.	"Server" : "UDM-udm1-instanceid"
7	UDM1 and UDM2 send error responses without server header.	"Server" : "SCP-<SCP FQDN>"
8	UDM1 and UDM2 send error responses with server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
9	UDM1 sends an error response with server header and UDM2 sends an error response without server header.	"Server" : "UDM-udm1-instanceid"
10	UDM1 sends an error response without server header.	"Server" : "SCP-<SCP FQDN>"
11	UDM1 sends an error response with server header.	"Server" : "UDM-udm1-instanceid"
12	UDM1 sends an error response with server header and UDM2 SCP couldn't do Alternate route due to some issue.	"Server" : "UDM-udm1-instanceid"

Table 3-42 (Cont.) Server Header Behavior 4

Serial No.	Scenario	Server Header Behavior
13	UDM1 sends an error response without server header and UDM2 SCP couldn't do Alternate route due to some issue.	"Server" : "SCP-<SCP FQDN>"
14	SCP is unable to connect with UDM1 and UDM2 due to connection issue.	"Server" : "SCP-<SCP FQDN>"
15	Timeout has occurred at UDM1.	"Server" : "SCP-<SCP FQDN>"
16	UDM1, UDM2, and UDM3 send error responses without server header.	"Server" : "SCP-<SCP FQDN>"
17	UDM1, UDM2, and UDM3 send error responses with server header.	"Server" : "UDM-udm3-instanceid UDM-udm2-instanceid UDM-udm1-instanceid"
18	UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response without server header.	"Server" : "SCP-<SCP FQDN>"
19	UDM1 and UDM3 have connection issues and the pods are down. UDM2 sends an error response with server header.	"Server" : "UDM-udm2-instanceid"
20	UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm1-instanceid"
21	UDM1 sends an error response without server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "SCP-<SCP FQDN>"
22	Loop detection (508) occurred.	"Server" : "SCP-<SCP FQDN>"
23	UDM1 sends an error response with server header. Timeout has occurred at UDM2, and UDM3 has connection issue and the pod is down.	"Server" : "UDM-udm1-instanceid"
24	UDM1 Sidecar returns special server headers.	"Server" : "SCP-<SCP FQDN>"

Table 3-42 (Cont.) Server Header Behavior 4

Serial No.	Scenario	Server Header Behavior
25	Ingress Rate Limiting: SCP Generates an error message because the ingress rate was more than the allowed rate configured for the consumer as specified by the rules configured in the Ingress Rate Limiter REST API.	"Server" : "SCP-<SCP FQDN>"
26	Pod Overload: SCP-worker pod is overloaded due to CPU overload or pending transactions.	"Server" : "SCP-<SCP FQDN>"
27	OCI: UDM1 SCP doesn't attempt on UDM1 due to 100% OCI UDM2 SCP receives error response with server header.	"Server" : "UDM-udm2-instanceid UDM-udm1-instanceid"
28	OCI: UDM1 SCP doesn't attempt on UDM1 due to 100% OCI. UDM2 SCP doesn't attempt on UDM2 due to 100% OCI.	"Server" : "SCP-<SCP FQDN> UDM-udm2-instanceid UDM-udm1-instanceid"

Managing Enhanced 5G SBI Message Failure Handling

Enable

This default behavior, which is specified in 3GPP TS 29.500, of this feature is enabled automatically in SCP at the time of deployment. To enable the enhanced server header behavior introduced in SCP 1.15.0, set **Enable Enhance Server Header Behavior** to true. To enable the enhanced server header behavior introduced in SCP 23.1.0 and later, set **Enable Enhance Server Header Behavior V2** to true. For more information, see [Configuring Server Header](#).

Note

The enhanced server header behavior of SCP 1.15.0 and SCP 23.1.0 are mutually exclusive.

Configure

You can configure the Enhanced 5G SBI Message Failure Handling feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about server header parameters configuration, see [Configuring Server Header](#).

- **Configure using REST API:** For information about server header configurations, see "Configuring Server Header" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

Updated the `ocscp_metric_sidecarproxy_failures_total` metric with the `ocscp_server_header` dimension in the [Metrics](#) section.

Added the [SCPServiceMeshFailure](#) alert in the [Alerts](#) section.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.30 Extension of HTTP Status Code List for Rerouting

SCP can reroute a request when a producer responds with an error code. Prior to this release, rerouting took place based on the configurable response codes. However, the list of configurable error codes was limited to a smaller set of enumerations (ENUMs), such as `GATEWAY_ERROR`, few other status codes and ENUMs.

With this enhancement, SCP now supports rerouting a request based on an extended list of configurable HTTP Status codes. The user-provided configurable list of error codes serves as the basis for rerouting. A wider set of numerical response codes is supported with the introduction of the new attribute "reRouteConditionList," which replaced the old attribute "reRouteOnResponseCodeList" in the Routing Options REST API. When a received error code matches a status code in the configurable list, the SCP reroutes the request based on the configured alternate routing mechanism.

Managing Configurable HTTP Status Codes for Rerouting

Enable

You can enable this feature using REST API by setting the `reRouteConditionList` routing option parameter. For more information about this parameter, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Configure

You can configure the HTTP Status Codes for Rerouting functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure HTTP Status Codes for Rerouting, see [Configuring Routing Options](#).
- **Configure using REST API:** For information about how to configure HTTP Status Codes for Rerouting, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

There is no specific metrics and alerts required for the Extension of HTTP Status Code List for Rerouting functionality.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.31 Load Balancing

The 5G core network is a service-based architecture that does not lend itself to an efficient load balancing of provider NFs. By introducing Service Communication Proxy (SCP) in the midst, the load balancing across available NFs can be significantly improved. SCP has a complete view of all the messages arriving for a given NF type and supports traffic distribution patterns, such as round-robin, based on its capacity and availability by enabling uniform load balancing strategy across the network.

SCP supports Load Balancing Algorithm: Priority and Capacity. Load balancing across the equivalent NF or NF Services is based on the priority and capacity.

Managing Load Balancing

Enable

The Load Balancing feature is a core functionality of SCP.

You can enable this feature using REST API by setting the routePolicy routing option parameter to Load_Balance. For more information about this parameter, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Note

This feature is enabled automatically if you are deploying SCP with Release 16 of Model C. For more information about Model C, see [Support for Model C Indirect 5G SBI Communication](#).

Configure

You can configure the Load Balancing functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure load balancing, see [Configuring Routing Options](#).
- **Configure using REST API:** For information about how to configure load balancing, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

There is no specific metrics and alerts required for the Load Balancing functionality.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.32 5G SBI Message Mediation Support

SCP supports Mediation as an independent service to modify 5G Service Based Interface (SBI) message content, which includes HTTP2 header values and JSON message body, based on the user-defined mediation rule sets.

SCP uses microservice, scp-mediation, that applies user configured message mediation policy rules to ingress 5G SBI messages to perform message mediation transformation. The scp-worker microservice applies mediation invocation filter criteria according to the mediation trigger point configuration and forwards 5G SBI messages to the scp-mediation microservice.

The following parameters are configured to forward SBI messages to Mediation from the trigger points:

- **nfType:** It routes all message requests for this nfType to the scp-mediation microservice.
- **serviceName:** It routes all message requests for this serviceName to the scp-mediation microservice.
- **httpMethods:** It routes all messages of a particular HTTP method type, which corresponds to the methods specified in this list, to the scp-mediation microservice.
- **triggerPoints:** It contains the list of trigger points that must be enabled to forward message requests from SCP to the scp-mediation microservice from the enabled trigger point. It has four values, requestIngress, requestEgress, responseIngress, and responseEgress.
- **match:** This block specifies the criteria required to match HTTP headers or JSON body or the both to route to the scp-mediation microservice.

Note

- Mediation is supported only in Release 16 SCP deployment.
- Mediation does not support multipart messages.

Pseudo Headers

Pseudo headers in service requests can be used in mediation rules to meet the condition, modify, or assign values to the user-defined variables.

SCP-Worker sends pseudo header values in the x-original-* headers, which can be used at mediation to modify the corresponding pseudo headers. If SCP detects any change in any of the x-original-* header value that SCP-Worker has passed to the mediation service, SCP-Worker will use the modified value of that x-original-* header to forward the message to peers.

The following sample represents pseudo header values of "x-original-path", "x-original-method", "x-scp-authority", "x-message-type", and "x-original-status" that can be used in the mediation rule to assign the values to the user-defined variables:

```
rule "RuleS1"
  agenda-group "groupId1-requestIngress"
  when
    req : Request(headers.get("3gpp-sbi-routing-binding") == "bl=nf-
set;nfset=set1.chfset.5gc.mnc012.mcc345")
  then
    req.variable.add("x-original-path",req.headers.get("x-original-path"))
    req.variable.add("x-original-scheme",req.headers.get("x-original-scheme"))
    req.variable.add("x-original-method",req.headers.get("x-original-method"))
    req.variable.add("x-scp-authority",req.headers.has("x-scp-authority"))
    req.variable.add("x-message-type","response")
    req.variable.add("authorityValue","http://
chf2svc.default.svc.cluster.local:8080/USEast/nchf-convergedcharging/v1/
chargingdata/")

    req.variable.add("supi",req.body.get("$.subscriberIdentifier.supi").toString()
)
    req.variable.add("fqdn","http://chf1svc.default.svc.cluster.local:8080/
USEast")
  end
```

The following sample represents pseudo header values that can be updated and set based on the user-defined variables or any other conditions in the mediation rule:

```
rule "RuleS10_1"
  agenda-group "groupId1-requestEgress"
  when
    req : Request(variable.get("x-original-path") == "/USEast/nchf-
convergedcharging/v1/chargingdata/"
    && variable.get("x-original-scheme") == "http"
    && variable.get("x-original-method") == "POST"
    && variable.get("x-scp-authority") == true
    && variable.get("supi") == "imsi-1234567814"
    && variable.get("authorityValue") == "http://
chf2svc.default.svc.cluster.local:8080/USEast/nchf-convergedcharging/v1/
chargingdata/"
  then
    req.setUri(req.variable.get("uri").toString())
    req.headers.put("x-original-scheme","https")
  end

rule "PseudoHeader3"
  agenda-group "groupId3-responseIngress"
  when
    res : Response(headers.get("x-original-status") == "201")
  then
```

```
res.headers.put("x-original-status", "204")
end
```

The following table describes different pseudo headers:

Table 3-43 Pseudo Headers

Header Name	Description
x-original-path	Carries the original path that is received in the request, that is, value of “:path” header of original message. x-original-path - “:path” header of original message. Example: /USEast/nchf-convergedcharging/v1/chargingdata/
x-original-scheme	Indicates the scheme of the received service request, that is, value of “:scheme” header of original message. x-original-scheme - “:scheme” header of original message. Example: http or https
x-original-method	Indicates the type of method for the received service request, that is, value of “:method” header of original message. Example: POST, GET, PUT
x-message-type	Indicates the value of message type, which can be "request" or "response". By default, if this header is absent, it will be treated as a "request". x-message-type - Value can be "request" or "response" Example: response or request
x-original-status	Indicates the response status in terms of status code, that is, value of “:status” header of original message. x-original-status - “:status” header of original message. Example: response status code ex:201, 200
setUri or “:authority” or “x-original-authority”	Indicates the correct target NF service in the PLMN, that is, value of “:authority” header of original message. x-original-authority- “:authority” header of original message. Example: :authority: udm1svc.scpsvc.svc.cluster.local:8080

Managing Mediation Support Feature

Enable

To enable 5G SBI Message Mediation Support feature, set the `mediationService` parameter to `true` in the `global parameters` section of the `custom-values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version.

Configure

You can configure the Mediation features using REST API and the CNC Console:

- **Configure using CNC Console:** You can enable the 5G SBI Message Mediation Support feature by setting `mediation` to `true`. For more information, see [Configuring SCP Features](#).

To configure trigger points, see [Configuring Mediation](#) and to configure mediation routing options, see [Configuring Routing Options for Mediation](#).

To configure the mediation rules, see [Configuring Mediation Rules](#).

To configure mediation at the log level, see [Configuring Mediation Log Levels](#) section.

- **Configure using REST API:** For information about configuring trigger points, see "Configuring Mediation Trigger Point", and for configuring mediation routing options, see "Configuring App Routing Options".
To configure mediation rules using the REST API, see "Configuring Mediation Rules".
To configure mediation at the log level using the REST API, see "Configuring Mediation Rules" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.


In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.32.1 Mediation Rules Configuration

Mediation rules stored in the database can be retrieved, new rules can be added, and existing rules can be modified using the CCNC GUI and RESTful API. In addition, the storage capacity has improved.

Figure 3-8 Rule Status Flow

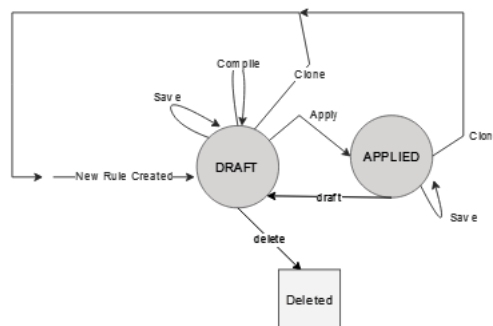

The following table lists the state of rules and its description

Table 3-44 Types of State

State	Description
Clone	To create a new rule, the values of the rule already created and stored in the database are used. This newly created rule has a name followed by a term draft. A new name must be provided as a rule.
Compile	This state precompiles, takes the rule source, and builds an executable rule base.
Draft	This state moves a rule from APPLIED status to DRAFT status.
Apply	This state moves a rule from DRAFT status to APPLY status.
Save	This state saves the changes in database.

The table lists the modifications allowed to be configured in rule status:

Table 3-45 Rule Status

Field Name	DRAFT status	Applied status
Rule Name	Not Allowed	Not Allowed
Format	Not Allowed	Not Allowed
Status	Not Allowed	Not Allowed
Mediation Mode	Allowed	Allowed
Code	Allowed	Not Allowed
State	Allowed	Allowed

Note

The Rule Name must be unique. The status of a rule can be DRAFT or APPLIED. Only DRAFT status can be deleted, edited, or viewed.

This section describes APIs that are used to define Mediation rules.

Header Rule APIs

The following are the header APIs used to create header rules supported in Mediation.

Table 3-46 Header Rule APIs

API Name	Return Type	Description
get(String key)	String	Returns the header value for the key specified. Example: Request(headers.get("x-number"))
has(String key)	Boolean	Returns true or false depending on whether the header specified by the key attribute is present or absent. Example: Request(headers.has("3gpp-Sbi-Producer-Id"))

Table 3-46 (Cont.) Header Rule APIs

API Name	Return Type	Description
has(String key, String value)	Boolean	Returns true or false depending on whether the header specified by the key and value attribute is present. Example: Request(headers.has("3gpp-Sbi-Producer-Id","nfinst=1faf1bbc-6e4a-3994-a507-a14ef8e1bc23"))
put(String key, String value)	Boolean	Creates the header with the specified key value pair if the key is absent. If the key is present, it updates the value of the header with the specified value. Example: req.headers.put("x-original-authority", "10.172.19.110:8080")
add(String key, String value);	Boolean	Adds the header with the provided key and value if it does not find the key. Example: req.headers.add("Content-type","application/json")
set(String key, String value);	Boolean	Updates the header with the value if the provided key is found. Example: req.headers.set("3gpp-Sbi-Producer-Id","nfinst=1faf1bbc-6e4a-3994-a507-a14ef8e1bc25")
set(String key, String oldValue, String newValue);	Boolean	Updates the header with a new value if the existing value of the header matches with the value specified by the oldValue attribute. Example: req.headers.set("x-number", "2", "3")
del(String key)	Boolean	Removes the header specified by the key attribute. Example: req.headers.del("3gpp-Sbi-Message-Priority")
del(String key, String value)	Boolean	Removes the header if it matches with the provided key and value. Example: req.headers.del("x-forwarded-NF","NRF")
count();	Integer	Returns the total count of all the headers. Example: Request(headers.count())
count(String key);	Integer	Returns the total count of headers with the key. Example: Request(headers.count("Accept"))
count(String key, String value)	Integer	Returns the total count of headers with the key and value. Example: Request(headers.count("Accept","application/json"))

APIs for Modifying Request Body

The following table describes the rule APIs to update and delete HTTP message body that are supported in mediation:

Note

The paths in all the parameters must be in the JSONPath format.

Table 3-47 APIs for Modifying Request Body

API Name	Return Type	Description
get(String path)	Object	Returns the value present at the specified path. Example: body.get("\$.serviceName")
getAll(String path)	List<Object>	Returns the list of objects present at the specified path. Example: body.getAll("\$.serviceName")
has(String path);	boolean	Checks whether the key is present at the path or not. Example: body.has("\$.serviceName")
has(String path, Object value)	boolean	Checks whether the key has the value present at the path or not. Example: body.has("\$.serviceName","value")
absPath(String arrayPath, String elem, Object value)	Object	Returns the whole path from the head to the element if the value is present. Example: req.body.absPath("\$.payload","iePath", "/a")
indexOf(String arrayPath, String elem, Object value)	Integer	Returns the index of the value in that JSONArray. Example: req.body.indexOf("\$.dataToIntegrityProtectBlock.payload","value", 100)
put(String path, String key, T value)	boolean	Adds the body with the provided key and value at the path if the key is absent. Otherwise, update the body with the value at the path. Example: req.body.put("\$","key","value") Note: It is recommended to use the PUT method while trying to add a new key.
add(String path, T value)	boolean	Adds the key embedded in the path with the provided value if the element is absent. Example: req.body.add("\$.ipEndpoints","value") Note: When adding a new key, the PUT method is always preferred over the ADD method.
set(String path, T value)	boolean	Updates the key embedded in the path with the provided value if the element is present. Example: rsp.body.set("\$.ipEndpoints","value")
del(String path, T value)	boolean	Removes the element at that path with the value present. Not supported. Example: req.body.del("\$.path","value")
del(String path)	boolean	Removes the element at that path. Example: req.body.del("\$.path")

HTTP Message Common APIs

The following are the common HTTP message APIs supported by both request and response body.

Table 3-48 HTTP Message Common APIs

API Name	Return Type	Description
getUri()	String	Returns the URI of the request. Example: req.getUri()
setUri(String URI)	void	Sets the URI in the body of the request. Example: req.setUri("http://oracle.com")
getHttpStatusCode()	Integer	Returns the StatusCode from the body of the response. Example: rsp.getHttpStatusCode()
setHttpStatusCode(Integer httpStatusCode)	void	Sets the StatusCode in the body of the response. Example: rsp.setHttpStatusCode(201)
getRejectMessage()	String	Returns the Reject Message from the body of the response. Example: rsp.getRejectMessage()
setRejectMessage(String rejectMessage)	void	Sets the Reject Message in the body of the response. Example: rsp.setRejectMessage("Message")

The following User Defined Variable APIs are supported in mediation:

Table 3-49 User Defined Variable APIs

API Name	Return Type	Description
get(String key)	Object	Returns the value of a user-defined variable associated with the specified key. Example: req.variable.get("key") or rsp.variable.get("key")
getAll()	String	Returns all user-defined variables and their values that have been configured through mediation rules. Example: req.variable.getAll() or rsp.variable.getAll()
has(String key)	Boolean	Returns true or false based on the presence of the user-defined variable. Example: req.variable.has("key") or rsp.variable.has("key")
- has(String key, Long value) - has(String key, Boolean value) - has(String key, String value)	Boolean	Returns true or false depending on whether the user-defined variable is present with the specified value. Example: req.variable.has("key", 1243456789) or rsp.variable.has("key", 1243456789) req.variable.has("key", true) or rsp.variable.has("key", true) req.variable.has("key", "value") or rsp.variable.has("key", "value") req.variable.has("key", "{\"test-key\":\"test-value\",\"test-key2\":{\"test-key2-key\":\"test-val\"}}") or rsp.variable.has("key", "{\"test-key\":\"test-value\",\"test-key2\":{\"test-key2-key\":\"test-val\"}}")

Table 3-49 (Cont.) User Defined Variable APIs

API Name	Return Type	Description
- put(String key, long value) - put(String key, Boolean value) - put(String key, String value)	Boolean	Adds the user-defined variable with the specified key and value if it doesn't exist, or updates the variable's value if the key is found. Example: req.variable.put("key", 1243456789) or rsp.variable.put("key", 1243456789) req.variable.put("key", true) or rsp.variable.put("key", true) req.variable.put("key", "value") or rsp.variable.put("key", "value") req.variable.put("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}") or rsp.variable.put("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}")
- add(String key, Long value) - add(String key, Boolean value) - add(String key, String value)	Boolean	Adds the user-defined variable with the specified key and value if it does not already exist. Example: req.variable.add("key", 1243456789) or rsp.variable.add("key", 1243456789) req.variable.add("key", true) or rsp.variable.add("key", true) req.variable.add("key", "value") or rsp.variable.add("key", "value") req.variable.add("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}") or rsp.variable.add("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}")
- set(String key, Long value) - set(String key, Boolean value) - set(String key, String value)	Boolean	Updates the user-defined variable with the specified value if the given key is found. Example: req.variable.set("key", 1243456789) or rsp.variable.set("key", 1243456789) req.variable.set("key", true) or rsp.variable.set("key", true) req.variable.set("key", "value") or rsp.variable.set("key", "value") req.variable.set("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}") or rsp.variable.set("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}")
- set(String key, Long oldValue, Long newValue) - set(String key, Boolean oldValue, Boolean newValue) - set(String key, String oldValue, String newValue)	Boolean	Updates the user-defined variable with a new value if the existing value matches the specified old value. Example: req.variable.set("header", 1243456789, 124345678999) or rsp.variable.set("header", 1243456789, 124345678999) req.variable.set("header", true, false) or rsp.variable.set("header", true, false) req.variable.set("header", "old value", "new value") or rsp.variable.set("header", "old value", "new value") req.variable.set("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}", "{\"test-key1\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}") or rsp.variable.set("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}", "{\"test-key1\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}")

Table 3-49 (Cont.) User Defined Variable APIs

API Name	Return Type	Description
del(String key)	Boolean	Deletes the user-defined variable if it matches the specified key. Example: req.variable.del("header") or rsp.variable.del("header")
- del(String key, Long value) - del(String key, Boolean value) - del(String key, String value)	Boolean	Deletes the user-defined variable if it matches both the specified key and value. Example: req.variable.del("key", 1243456789) or rsp.variable.del("key", 1243456789) req.variable.del("key", true) or rsp.variable.del("key", true) req.variable.del("header", "value") or rsp.variable.del("header", "value") req.variable.del("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}") or rsp.variable.del("key", "{\"test-key\":\"test-value\", \"test-key2\":{\"test-key2-key\":\"test-val\"}}")
count();	Integer	Returns the total count of all user-defined variables. Example: req.variable.count() or rsp.variable.count()

Mediation Service Rule Configuration with Scenarios

This section captures various types of mediation rule configuration with scenarios.

Use Case 1

To update the headers for specific requests.

Scenario

The mediation rule is configured when headers get ("pduSessionId"="23476") and add the header (X-Service-Name=PCF) value to the request.

Mediation Rule

```
rule "Rule2_PCF"
  agenda-group "CUSTOM_ORACLE_SCP-requestEgress"
  when
    req : Request(headers.get("pduSessionId") == "23476")
  then
    req.headers.put("x-service-name", "PCF")
  end
```

Use Case 2

To add, update, or delete any attribute in the JSON payload in the request or response.

Scenario

Mediation rule is configured as when incoming response payload got servingNetworkName="5G:nmc310.mcc310.3gppnetwork.org" then delete the "traceData" attribute and add TP="ResIngressAusf" in json payload.

Mediation Rule

```
rule "Rule7_AUSF"
  agenda-group "CUSTOM_ORACLE_SCP-responseIngress"
  when
```

```

        res : Response(body.get("$.servingNetworkName")== "5G:nmc310.mcc
310.3gppnetwork.org")
    then
        res.body.del("$.traceData")
        res.body.put("$", "TP", "ResIngressAusf")
    end

```

Use Case 3

To update URI components such as apiRoot, apiName, apiVersion, and apiSpecificResourceUriPart in the request or response.

Scenario

Mediation rule is configured as when request payload got "3gpp-sbi-target-apiroot"="http://ausf1svc.default.svc.cluster.local:8080/USEast" then update the URI to "http://ausf2svc.scpsvc.svc.cluster.local:8080/USEast/nausf-auth/v1/ue-authentications".

Mediation Rule

```

rule "Rule5_AUSF"
    agenda-group "CUSTOM_ORACLE_SCP-requestEgress"
when
    req : Request(headers.get("3gpp-sbi-target-apiroot") == "http://
ausf1svc.default.svc.cluster.local:8080/USEast")
then
    req.setUri("http://ausf2svc.default.svc.cluster.local:8080/USEast/nausf-
auth/v1/ue-authentications")
end

```

Use Case 4

To update the authority in apiRoot coming in the request or response.

Scenario

Mediation rule is configured as when request header got 3gpp-Sbi-Target-apiRoot="http://pcf1svc.default.svc.cluster.local:8080/USEast" update the authority to pcf3 from pcf1.

Mediation Rule

```

rule "Rule6_PCF"
    agenda-group "CUSTOM_ORACLE_SCP-requestEgress"
when
    req : Request(headers.get("3gpp-sbi-target-apiroot") == "http://
pcf1svc.scpsvc.svc.cluster.local:8080/USEast")
then
    req.setUri("http://pcf3svc.scpsvc.svc.cluster.local:8080/USEast/npcf-
smpolicycontrol/v1/sm-policies")
end

```

Use Case 5

To add any vendor-specific header.

Scenario

Mediation rule is configured as when response payload got "sliceInfo"=="adfg127" then add the vendor-specific header ("\$, "x-service-name", "PCF").

Mediation Rule

```
rule "Rule2_PCF"
  agenda-group "CUSTOM_ORACLE_SCP_requestEgress"
  when
    req : Request(body.get("$.sliceInfo") == "adfg127")
  then
    req.headers.put("x-service-name", "PCF")
  end
```

Use Case 6

To convert the response status code that it received to any specific status code.

Scenario

The mediation rule is configured; if mediation receives an HTTP response code of 401, it should update the response code to 402.

Mediation Rule

```
rule "status rule_responseEgress"
  agenda-group "CUSTOM_ORACLE_SCP_responseEgress"
  when
    rsp : Response(getHttpStatusCode() == "402")
  then
    rsp.setHttpStatusCode(401)
  end
```

Use Case 7

To update authority in apiRoot based on a JSON-nested object from the body.

Scenario

The mediation rule is configured to segregate NF Producer based on MSISDN.

To retrieve the nested parameter, servedGPSI, from the below structure:

```
"pDUSessionChargingInformation":{
  "chargingId":747941933,
  "pduSessionInformation":{},
  "uetimeZone":"+00:00+0",
  "userInformation":{
    "servedGPSI":"msisdn-447432982860",
    "servedPEI":"imeisv-3528878115855501",
    "unauthenticatedFlag":false
  },
  "
```

Mediation Rule

```
rule "G_N40_odd"
  agenda-group "G_N40_odd-requestIngress"
  when
    req :
```

```
Request(body.get("$.pDUSessionChargingInformation.userInformation.servedGPSI"
)=="msisdn-447432982860")
then
    req.headers.put("3gpp-sbi-target-apiroot",http://10.251.132.183:8080)
end
```

Use Case 8

To define the prioritized order of message mediation rules and run only the matching highest-priority rule.

Scenario

The following sample rules define the prioritized order of message mediation rules and run only the matching highest-priority rule. The low-priority rules are ignored. It uses the same agenda-group and the same activation group, but with different salience.

```
rule "Rule1"
  salience 10
  activation-group "nf-rewrite"
  agenda-group "grp1-requestIngress"
  when
    req : Request(body.get("$.pduSessionId") == "23476" && headers.has("\x-
forwarded-NF\","AMF\"))
  then
    req.body.put("$","medRule","rule1")
  end

rule "Rule2"
  salience 40
  agenda-group "grp1-requestIngress"
  activation-group "nf-rewrite"
  when
    req : Request(body.get("$.pduSessionId") == "23476" && headers.has("\x-
forwarded-NF\","PCF\"))
  then
    req.body.put("$","medRule","rule2")
  end

rule "Rule3"
  salience 20
  agenda-group "grp1-requestIngress"
  activation-group "nf-rewrite"
  when
    req : Request(body.get("$.pduSessionId") == "23476" && headers.has("\x-
forwarded-NF\","SMF\"))
  then
    req.body.put("$","medRule","rule3")
  end
```

An activation group is a named group of rules where only one rule is allowed to fire. When one rule from that group fires, all other pending activations in the same group are canceled or removed from the agenda. When multiple rules belong to the same activation group and their conditions are true, Drools uses salience to decide which one starts first.

When the highest salience rule in that group starts:

- Its consequence initiates.
- All other activations in the same activation-group are canceled, regardless of their salience.

3.32.1.1 Mediation Rule Migration Process


Previously, rules were used from the Kubernetes config map. Currently, the rules present in the config map are migrated to the database table (mediation_rule table).

This section describes the procedure to execute the migration of rules from the existing config-map based implementation into the new REST API.

The following are the config-map related to mediation:

- ocscp-nf-mediation-config-boot: It contains all the configuration related to the spring boot application and is used in both modes (test and active).
- ocscp-nf-mediation-config-active: It contains rule entries and is only applicable to active mode.
- ocscp-nf-mediation-config-test: It contains rule entries and is only applicable to test mode.
- The following image illustrates the migration process:

Figure 3-9 Migration to Database table

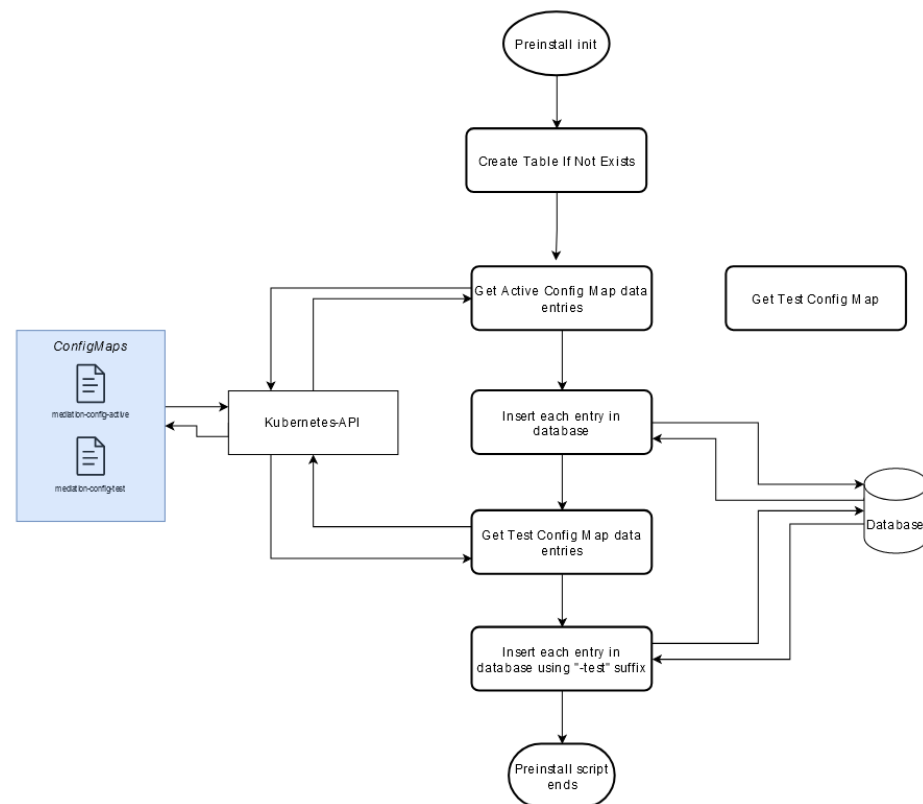

Note

To successfully migrate to database table, all the rules in the Config map must be valid.

Generate Rule Entries

1. Read ocscp-nf-mediation-config-active configuration map.
2. For each entry in key-value map structure, create entry in Rule table with the following:
 - a. Rule.name: entry.key removing .drl extension
 - b. Rule.code: entry.value
 - c. Rule.status: APPLIED
 - d. Rule.mode: MEDIATION_ACTIVE
3. Read ocscp-nf-mediation-config-test configuration map.
4. Create entry in Rule table with the following:
 - a. Rule.name: entry.key removing .drl extension adding "-test" as suffix to avoid name conflicts with active configmap
 - b. Rule.code: entry.value
 - c. Rule.status: APPLIED
 - d. Rule.mode: MEDIATION_TEST

Migration of Rule Entries

The following examples details about the rule migrated from configmap to database table.

Example of ocscp-nf-mediation-config-active configuration map:

```
apiVersion: v1
kind: ConfigMap
metadata:
  creationTimestamp: "2022-11-11T13:15:14Z"
  name: nf-mediation-nf-mediation-config-active
  namespace: scpsvc
data:
  rule_1.drl: |
    package com.oracle.cgbu.ocmediation.nfmediation;

    import com.oracle.cgbu.ocmediation.nfruleengine.NFDroolsRuleEngine;
    import com.oracle.cgbu.ocmediation.factdetails.Request;
    import com.oracle.cgbu.ocmediation.factdetails.Response;
    import java.util.Map;
    import java.util.HashMap;

    dialect "mvel"

    rule "Rule_show_add_header"
    when
      req : Request(headers.has("header-test") == true)
    then
```

```

        req.headers.add("3gpp-Sbi-Message-Priority","10")
        req.headers.del("x-test-req-header1")
    end

    rule "Rule_show_delete_header"
    when
        req : Request(headers.has("header-test2") == true)
    then
        req.headers.del("header-test2")
    end

rule_2.drl: |
package com.oracle.cgbu.ocmediation.nfmediation;

import com.oracle.cgbu.ocmediation.nfruleengine.NFDroolsRuleEngine;
import com.oracle.cgbu.ocmediation.factdetails.Request;
import com.oracle.cgbu.ocmediation.factdetails.Response;
import java.util.Map;
import java.util.HashMap;

dialect "mvel"

rule "Rule_show_add_headerv2"
when
    req : Request(headers.has("another-header") == true)
then
    req.headers.add("new-header2","10")
end

```

Example of ocscp-nf-mediation-config-test configuration map:

```

apiVersion: v1
kind: ConfigMap
metadata:
  creationTimestamp: "2022-11-11T13:15:14Z"
  name: nf-mediation-nf-mediation-config-test
  namespace: scpsvc
data:
  rule_1.drl: |
    package com.oracle.cgbu.ocmediation.nfmediation;

    import com.oracle.cgbu.ocmediation.nfruleengine.NFDroolsRuleEngine;
    import com.oracle.cgbu.ocmediation.factdetails.Request;
    import com.oracle.cgbu.ocmediation.factdetails.Response;
    import java.util.Map;
    import java.util.HashMap;

    dialect "mvel"

    rule "Rule_show_add_header"
    when
        req : Request(headers.has("header-test") == true)
    then
        req.headers.add("3gpp-Sbi-Message-Priority","10")
        req.headers.del("x-test-req-header1")
    end

```

```

end

rule "Rule_show_delete_header"
when
    req : Request(headers.has("header-test2") == true)
then
    req.headers.del("header-test2")
end

```

In this examples, the ocscp-nf-mediation-config-active configuration map has two different entries (rule_1.drl and rule_2.drl) and rule_1.drl has the definition of two different rules, Rule_show_add_header and Rule_show_delete_header, it is important to consider that rule_1 will have a single rule entry in the database containing all the code for its two rules.

In this case, the database entries are as follows:

Table 3-50 Database Entries

Name	Status	Mode	Code
rule_1	APPLIED	MEDIATION_ACTIVE	<pre> package com.oracle.cgbu.ocmediation.nfmediation; import com.oracle.cgbu.ocmediation.nfruleengine.NFDrools RuleEngine; import com.oracle.cgbu.ocmediation.factdetails.Request; import com.oracle.cgbu.ocmediation.factdetails.Response; import java.util.Map; import java.util.HashMap; dialect "mvel" rule "Rule_show_add_header" when req : Request(headers.has("header-test") == true) then req.headers.add("3gpp-Sbi-Message- Priority","10") req.headers.del("x-test-req-header1") end rule "Rule_show_delete_header" when req : Request(headers.has("header-test2") == true) then req.headers.del("header-test2") end </pre>

Table 3-50 (Cont.) Database Entries

Name	Status	Mode	Code
rule_2	APPLIED	MEDIATION_ACTIVATIVE	<pre> package com.oracle.cgbu.ocmediation.nfmediation; import com.oracle.cgbu.ocmediation.nfruleengine.NFDrools RuleEngine; import com.oracle.cgbu.ocmediation.factdetails.Request; import com.oracle.cgbu.ocmediation.factdetails.Response; import java.util.Map; import java.util.HashMap; dialect "mvel" rule "Rule_show_add_headerv2" when req : Request(headers.has("another-header") == true) then req.headers.add("new-header2", "10") end </pre>

Table 3-50 (Cont.) Database Entries

Name	Status	Mode	Code
rule_1-test	APPLIED	MEDIATION_TEST	<pre> package com.oracle.cgbu.ocmediation.nfmediation; import com.oracle.cgbu.ocmediation.nfruleengine.NFDrools RuleEngine; import com.oracle.cgbu.ocmediation.factdetails.Request; import com.oracle.cgbu.ocmediation.factdetails.Response; import java.util.Map; import java.util.HashMap; dialect "mvel" rule "Rule_show_add_header" when req : Request(headers.has("header-test") == true) then req.headers.add("3gpp-Sbi-Message- Priority","10") req.headers.del("x-test-req-header1") end rule "Rule_show_delete_header" when req : Request(headers.has("header-test2") == true) then req.headers.del("header-test2") end </pre>

3.32.2 Mediation Log Level Configuration

The Mediation Log Level Configuration feature allows users to fetch and update the log level settings of the mediation service. Through the REST API, users can control the mediation log level, enhancing the operational efficiency of the mediation service.

Managing Log Level Configuration

Enable

To enable 5G SBI Message Mediation Support feature, set the `mediationService` parameter to `true` in the `global parameters` section of the `custom-values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version.

Configure

You can configure the Mediation features using REST API and the CNC Console.

- **Configure using CNC Console:** You can enable the 5G SBI Message Mediation Support feature by setting mediation to true. For more information, see [Configuring SCP Features](#). To configure mediation at the log level, see [Configuring Mediation Log Levels](#) section.
- **Configure using REST API:** To configure mediation at the log level using the REST API, see "Configuring Mediation Rules" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.32.3 Mediation Support for User Defined Variables in Rules and Trigger Points

Mediation Support for User Defined Variables in Rules and Trigger Points functionality in SCP allows users to store information in a mediation trigger point and then pass that information to another mediation trigger point for the same transaction. This is particularly useful when dealing with complex message manipulations, such as modifying a response based on the content of the initial request.

This feature supports the storage of various types of information, including header values, values from JSON payloads, modified values based on mediation rules, or custom values derived from specific conditions. Users can store information with a custom name using User Defined Variables (UDVs) REST API, which can then be read or written within the mediation rules. Additionally, these variables and their values will be transmitted to the SCP-Worker as a mediation response header, with the header name med-user-defined-var-list.

For example:

```
med-user-defined-var-list=[{"serviceName\":\"npcf-smpolicycontrol\", \"targetNfType\":\"PCF\", \"requesterNfType\":\"AMF\", \"supi\":\"imsi-1234567814\", \"pduSession\":23476}]
```

Use cases examples:

- **Update Discovery Response Based on Requester NF Type:** The discovery response does not contain details about the requester NF, making it challenging to mediate the response based on the requester NF. This feature allows users to store the requester NF information

at the RxRequest trigger point and use the stored requester NF type information to mediate the discovery response at the RxResponse trigger point.

- **Update Response Based on Derived Information from the Request:** Users can define mediation rules to identify and store the user category as prepaid or postpaid at the RxRequest trigger point. The stored user category information can then be used to mediate the response at the RxResponse trigger point.

Usage of User Defined Variables in Mediation Rules

The user-defined variables can be used in both the conditions and actions of mediation rules, as well as in the matching configurations based on mediation trigger points at SCP to qualify messages for mediation. The stored information about UDVs at the mediation trigger points will not be included in the communication to the SCP peer.

Managing User Defined Variables in Mediation Rules and Trigger Points

Enable

To enable 5G SBI Message Mediation Support feature, set the `mediation Service` parameter to true in the global parameters section of the `custom_values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Configure

You can configure the Mediation features using REST API and the CNC Console.

- **Configure using CNC Console:** You can enable the Mediation Support for User Defined Variables in Rules and Trigger Points feature by setting `mediation` and `User Defined Variable` to true. For more information, see [Configuring Mediation](#). To configure Mediation Support for User Defined Variables in Rules and Trigger Points, see [Configuring Mediation Support for User Defined Variables](#) section. For instructions on setting up trigger points, see [Configuring Mediation Trigger Point](#). To set up mediation rules, see [Configuring Mediation Rules](#).
- **Configure using REST API:** For information on configuring mediation, see the "Configuring SCP Features" section. For instructions on setting up trigger points, see "Configuring Mediation Trigger Points". To configure mediation routing options, see "Configuring App Routing Options". To set up mediation rules using the REST API, see "Configuring Mediation Rules". For details on configuring mediation at the log level through the REST API, see "Configuring Mediation Rules" in the *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

- Added the following metrics in the [Metrics](#) section:
 - `ocscp_worker_med_udv_read_failure_total`
 - `ocscp_worker_med_udv_usage_count_limit_exceeded_total`
- Added the following metrics in the [Mediation Metrics](#) section:
 - `ocscp_med_udv_storage_failure_total`
 - `ocscp_med_udv_read_failure_total`
 - `ocscp_med_udv_used_total`
 - `ocscp_med_udv_size_mismatch_total`
 - `ocscp_med_udv_type_mismatch_total`

- `ocscp_med_udv_not_configured_total`
- `ocscp_med_udvs_max_size_limit_exceeded_total`
- Added the following alert in the [Mediation Alerts](#) section:
 - [NFMediationUserDefinedVariablesMaxSizeLimitExceeded](#)

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.33 5G SBI Message Routing

SCP provides 5G Service Based Interface (SBI) message routing control and brings resiliency to the network. It relieves consumer NFs from remembering and interpreting complex routing rules associated with the next hop selection. Concurrently, it makes rerouting decisions based on the load conditions and health status of producer NFs within the configured time period.

SCP acts as a proxy and forwards and routes any 5G ingress service request to the host (5G NF) present in the request's URI.

For Release 16, SCP supports:

- 5G SBI Model C indirect communication
- 5G SBI Model D indirect communication
- Learns 5G NF topology from NRF
- Static configuration of 5G NF topology
- Load Control based on the Load Control Information Header and so on.
- IPv4 IP family
- Every NF deployed in the network is expected to register with NRF as SCP learns the deployed network's NF topology from NRF.

Alternate Routing

SCP performs alternate routing by forwarding the message request to the next available producer NF if the target producer NF:

- is unavailable.
- does not respond due to a timeout.
- responds with an error.

An alternate routing attempt is considered when a connection is established and a message request is sent out. If SCP fails to establish a connection, it is not counted as an attempt.

After receiving a message request, if SCP does not find any routing rules, SCP uses a default routing rule to route the request directly to the target producer NF. In such scenarios, alternate routing and load balancing functionalities are not applicable.

SCP provides the Circuit Breaking functionality by rejecting message requests for failed or degraded NFs when no other equivalent is available for reselection. This process prevents consumer NFs from using their resources because they wait for responses from producer NFs. SCP attempts to get a response from producer NFs on behalf of consumer NFs by allowing the service user to focus on the application.

SCP also reroutes message requests with one of the configured HTTP status codes. For more information about the status codes, see "HTTP Status Code and Applicability for Rerouting" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

When one of the following nexthop SCP or SEPP routing failure conditions occurs, SCP performs alternative routing:

- Error received from nextHop SCP or SEPP
- Request timeout at SCP
- Transport error

Types of Routing Options Supported by SCP

The types of routing options are:

- Pod Level Routing: Controls routing across the pods of selected NF
- Service Level Routing: Controls routing of selected NF services

InterSCP Routing

SCP supports Inter-SCP routing for scenarios where routing across regions is required.

The network can be divided into different geographical regions, with each region deploying redundant NF instances. Each of these regions can be deployed with their own georedundant NRFs. There are scenarios when traffic routing is required across the regions.

In such cases, SCP has to learn the network topology by interacting with NRFs in different regions. SCP also discovers other SCPs in the network. To enable routing to producer NF instances in other regions, the consumer SCP in a region is aware of the producer SCP in other regions.

SCP defines its serving Locality in the servingScope parameter in its profile registered with NRF and learns the NF topology from NRF. SCP learns other SCPs from NRF in the same way as it learns from any other producer.

When consumer NF's SCP receives a request, it finds the locality of the selected producer NF instance.

If the producer NF locality is not served by the consumer SCP, the consumer NF's SCP finds the SCP serving the producer NF's locality and routes the request to that SCP. The producer's SCP forwards the request to the producer NF within its served locality.

If the consumer SCP serves the producer locality, it is routed by the consumer SCP. If not, the request is forwarded to the producer SCP serving the NF locality for routing in its served region.

If the selected producer's locality is not served by the consumer SCP but by multiple SCPs with the same priority, the consumer SCP load balances requests to the producer SCPs with the same priority for the selected producer, using weights based on the capacity of those producer SCPs.

"User-Agent" Header Formats

SCP adds the "User-Agent" header to SCP originated message requests to NRF.

SCP uses the `userAgentHeaderFormat` REST API parameter to define the format of the "User-Agent" header that is added in the SCP originated message requests towards NRF. SCP supports the following formats of the "User-Agent" header:

- NFTYPE-NFINSTANCEID FQDN
- NFTYPE-NFINSTANCEID-FQDN
- NFTYPE-FQDN NFINSTANCEID
- NFTYPE-FQDN-NFINSTANCEID
- NFTYPE-NFINSTANCEID
- NFTYPE-FQDN
- NFTYPE
- NFTYPE-UNIQUEID

This enhancement enables SCP to support above mentioned "User-Agent" formats and includes consumer NFs identity as dimensions in SCP metrics, alerts, and logs. The following dimensions are introduced as part of this enhancement to filter SCP metrics based on the consumer NF information: `ocscp_consumer_host`, `ocscp_consumer_nf_instance_id`, and `ocscp_consumer_nf_type`.

SCP uses the `scp_user_agent_info` REST API parameter to enable or disable the addition of the "User-Agent" header in the SCP originated messages towards NRF. For more information about the `scp_user_agent_info` parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Loop Detection

The loop detection feature is used to identify the loops in the 5G control plane network. SCP detects loops using the `via` header in the incoming request. SCP looks for its own FQDN presence in `via` header. If such a case occurs, this implies that the same SCP is invoked twice in the same request sequence, which means there is a loop. Hence, SCP rejects such a request. The loop detection feature is enabled by default.

Managing 5G SBI Message Routing

Enable

SCP determines 5G NF topology information from NRF. You can enable the 5G SBI Message Routing functionality by providing all the NRF profiles' information in the YAML file as described in the global parameters section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

- This feature is enabled automatically if you are deploying SCP with Release 16 of Model C. For more information about Model C, see [Support for Model C Indirect 5G SBI Communication](#).
- You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

Configure

You can configure the 5G SBI Message Routing functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure routing options, see [Configuring Routing Options](#).
- **Configure using REST API:** For information about configuring routing options, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.33.1 5G SBI Notification Requests Processing

The following table describes ApiPrefix usage in notification messages at SCP:

Table 3-51 5G SBI Notification Requests Processing

Notification Message Received at SCP			Forwarded Notification Message to NextHop SCP (SCP-P)			Forwarded Notification Message to Target NF			Description
3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	3gpp-sbi-target-apiRoot Header	:authority Header	:path Header If the next hop SCP has published ApiPrefix in the SCP profile.	Routing Attempt	:authority Header	:path Header	-
scheme://NF-C1.com:port/NF-C1ApiPrefix	scp.com:port	scpApiPrefix/notification Uri	scheme://NF-C1.com:port/NF-C1ApiPrefix	nextHopScp.com:port	{nextHopScpApiPrefix}/notification Uri	Primary routing	scheme://NF-C1.com:port	NF-C1ApiPrefix/notification Uri	While registering with NRF, the notification handling service published apiPrefix in NFProfile.
						Alternate routing	scheme://NF-C2.com:port	{NF-C2ApiPrefix}/notification Uri	NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service.
scheme://NF-C1.com:port/	scp.com:port	scpApiPrefix/notification Uri	scheme://NF-C1.com:port/	nextHopScp.com:port	{nextHopScpApiPrefix}/notification Uri	Primary routing	scheme://NF-C1.com:port	/notification Uri	NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service.

Table 3-51 (Cont.) 5G SBI Notification Requests Processing

Notification Message Received at SCP			Forwarded Notification Message to NextHop SCP (SCP-P)			Forwarded Notification Message to Target NF			Description
3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	3gpp-sbi-target-apiRoot Header	:authority Header	:path Header If the next hop SCP has published ApiPrefix in the SCP profile.	Routing Attempt	:authority Header	:path Header	-
						Alternate routing	scheme://NF-C2.com:port	{NF-C2ApiPrefix}/notification Uri	NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service.
scheme://NF-C1.com:port/NF-C1ApiPrefix	scp.com:port	/notification Uri	scheme://NF-C1.com:port/	nextHopScp.com:port	{nextHopScpApiPrefix}/notification Uri	Primary routing	scheme://NF-C1.com:port	NF-C1ApiPrefix/notification Uri	SCP is deployed without apiPrefix in SCP profile.
						Alternate routing	scheme://NF-C2.com:port	{NF-C2ApiPrefix}/notification Uri	NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service.
scheme://NF-C1.com:port/	scp.com:port	/notification Uri	scheme://NF-C1.com:port/	nextHopScp.com:port	{nextHopScpApiPrefix}/notification Uri	Primary routing	scheme://NF-C1.com:port	/notification Uri	SCP and the notification handling service are deployed without an apiPrefix in the NFProfile.

Table 3-51 (Cont.) 5G SBI Notification Requests Processing

Notification Message Received at SCP			Forwarded Notification Message to NextHop SCP (SCP-P)			Forwarded Notification Message to Target NF			Description
3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	3gpp-sbi-target-apiRoot Header	:authority Header	:path Header If the next hop SCP has published ApiPrefix in the SCP profile.	Routing Attempt	:authority Header	:path Header	-
						Alternate routing	scheme://NF-C2.com:port	{NF-C2ApiPrefix}/notificationUri	NF-C2ApiPrefix is used as per deployment and the apiPrefix value in the NFProfile for the service.
Delegated Discovery notification request	scp.com:port	{scpApiPrefix}/scp-default-sub-notify-uri	scheme://NF-C1.com:port/ • Select ed target notification URI	nextHopScp.com:port	{nextHopScpApiPrefix}/notificationUri	Primary routing	scheme://NF-C1.com:port	{NF-C1ApiPrefix}/notificationUri	Notification URI is used according to the published NFProfile based on discovery responses.
						Alternate routing	scheme://NF-C2.com:port	{NF-C2ApiPrefix}/notificationUri	Notification URI is used according to the published NFProfile based on discovery responses.

Table 3-51 (Cont.) 5G SBI Notification Requests Processing

Notification Message Received at SCP			Forwarded Notification Message to NextHop SCP (SCP-P)			Forwarded Notification Message to Target NF			Description
3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	3gpp-sbi-target-apiRoot Header	:authority Header	:path Header If the next hop SCP has published ApiPrefix in the SCP profile.	Routing Attempt	:authority Header	:path Header	-
Delegated Discovery notification request	scp.com:port	/scp-default-sub-notify-uri	scheme://NF-C1.com:port/ • Selected target notification URI	nextHopScp.com:port	{nextHopScpApiPrefix}/notificationUri	Primary routing	scheme://NF-C1.com:port	{NF-C1ApiPrefix}/notificationUri	Notification URI is used according to the published NFProfile based on discovery responses.
						Alternate routing	scheme://NF-C2.com:port	{NF-C2ApiPrefix}/notificationUri	Notification URI is used according to the published NFProfile based on discovery responses.

Obtaining NF Information from Notification Requests

SCP obtains the target producer NF information from `nfset` and `nfinst` attributes of the notification request even if the `3gpp-Sbi-Routing-Binding` header does not contain the `servname` attribute. In this case, SCP pegs the exact values of the producer NF type in `ocscp_nf_type` and `ocscp_nf_service_type` dimensions of the respective metrics. The format of dimension values are as follows:

- `ocscp_nf_type=<extracted_nftype>`
- `ocscp_nf_service_type=<extracted_nftype>-unknown`

Where,

- `<extracted_nftype>` is the target producer NF type.
- `unknown` indicates that the `servname` attribute is absent in the `3gpp-Sbi-Routing-Binding` header.

In case the `servname` attribute is present in the `3gpp-Sbi-Routing-Binding` header, SCP pegs the exact values of the producer NF type in `ocscp_nf_type` and `ocscp_nf_service_type` dimensions of the respective metrics. The format of dimension values are as follows:

- `ocscp_nf_type=<extracted_nftype_fromservname>`
- `ocscp_nf_service_type=<extracted_nftype_fromservname>-<service name>`

Where,

- `<extracted_nftype_fromservname>` is the target producer NF type extracted from the `servname` attribute.
- `<service name>` is the service name present in the 3gpp-Sbi-Routing-Binding header.

3.33.1.1 Enhanced Notifications Handling

In SCP 25.1.100 and earlier releases, SCP was able to alternate route notification requests when the incoming request contained the `servName` attribute in the 3gpp-Sbi-Routing-Binding header.

The `servName` attribute identifies the service name of the producer NF, for example, in the following 3gpp-Sbi-Routing-Binding header content, `servName` is `nsmf-pdusession` for the producer NF type SMF:

```
3gpp-Sbi-Routing-Binding:bl=nf-  
instance;nfinst=smf1;nfset=smfset1;servname=nsmf-pdusession
```

When the 3gpp-Sbi-Routing-Binding header did not contain the `servName` attribute, SCP was unable to alternate route the notification requests. In the absence of the `servName` attribute, SCP relied on NF profile level information to route to the alternate destinations or producer NFs. However, the information in NF profile at the profile level was insufficient to perform routing.

With the Enhanced Notification Handling feature, SCP can alternate route notification requests in the following conditions:

- If the 3gpp-Sbi-Target-apiRoot header is absent but the 3gpp-Sbi-Routing-Binding header is present without the `servName` attribute, SCP can alternate route notification requests by determining alternate NF either by using `NFInstanceID` or `NFSet` present in the 3gpp-Sbi-Routing-Binding header.
- If the 3gpp-Sbi-Routing-Binding header is absent but the 3gpp-Sbi-Target-apiRoot header is present in the notification request, SCP can alternate route notification requests using reverse lookup.

Sample 3gpp-Sbi-Routing-Binding header content without the `servName` attribute:

```
3gpp-Sbi-Routing-Binding:bl=nf-instance;nfinst=smf1;nfset=smfset1
```

SCP selects an equivalent producer NF using the `nfset` attribute in the 3gpp-Sbi-Routing-Binding header for alternate routing. If SCP is unable to determine the service type of the notification requests, SCP uses profile level information from the registered profiles of the producer NFs for routing and alternate routing the requests.

When SCPC-Notification processes NF profiles, it uses the `nfProfile-level-attribute-config-data` REST API parameters to configure scheme, port, capacity, and priority to create profile level default service objects while creating routing rules. SCP uses these profile level routing rules to alternate route notification requests without service names. SCP uses these parameters from the REST API config if they are absent in the NF profile at the profile level. If present, that will get priority.

Sample nfProfile-level-attribute-config-data REST API configuration:

```
{,
  "notificationAttributes": {
    "scheme": "http",
    "port": 80,
    "capacity": 65535,
    "priority": 1
  },
}
```

The following table describes the handling of notification requests with different header combinations:

Table 3-52 Alternate Routing Behavior Using Different Header Combinations

Notification Contains 3gpp-Sbi-Target-apiRoot	Notification Contains 3gpp-Sbi-Routing-Binding	SCP's Behavior in 25.1.100 and Earlier	SCP's Behavior in 25.1.200 and Later
Yes	Yes	- SCP alternate routes if servName is present. - SCP does not alternate route if servName is absent.	SCP alternate routes whether servName is present or absent.
Yes	No	SCP does not alternate route.	SCP alternate routes if alternateRoutingWithoutServname is set to true. Note: In case the 3gpp-Sbi-Routing-Binding header is absent but the 3gpp-Sbi-Target-apiRoot header is present in the notification request, SCP can alternate route notification requests using the reverse lookup.
No	Yes	- SCP alternate routes if servName is present. - SCP does not alternate route if servName is absent.	SCP alternate routes whether servName is present or absent. In case servName is absent, SCP alternate routes if alternateRoutingWithoutServname is set to true.
No	No	Routing fails with "400: Insufficient Routing details" response.	Routing fails with "400: Insufficient Routing details" response.

Managing Enhanced Notifications Handling

Enable

This feature is disabled at the time of SCP deployment. You can enable or disable this feature using the CNC Console as described in [Configuring Enhanced Notifications Handling](#).

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see
 - [Configuring Enhanced Notifications Handling](#) to enable the feature.
 - [Configuring NF Profile Level Attribute Configuration Data](#) to configure NF profile level attribute configurations data.

- [Configuring NF Profile Level Attribute](#) to configure NF profile level attributes for a specific NFType.
- **Configure using REST APIs:** For information about configuring REST APIs, see "Configuring NF Profile Level Attribute" and "Configuring NF Profile Level Attribute Configuration Data" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The `ocscp_worker_rx_notification_req_total` metric is added in the [Metrics](#) section.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.33.2 5G SBI Service Requests Processing

The ApiPrefix usage in service request messages at SCP are as follows:

Table 3-53 5G SBI Service Requests Processing

5G SBI Request Message Received at SCP			SBI Service Request to NextHop SCP			Forwarded SBI Service Request Message to Target NF			Description
3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	Routing Attempt	:authority Header	:path Header	-
scheme://NF-P1.com:port/NF-P1ApiPrefix	scp.com:port	scpApiPrefix/<apiName>/<apiVersion>apiSpecificResourceURI	scheme://NF-P1.com:port/NF-P1ApiPrefix	nextHopScp.com:port	{nextHopScpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI If the next hop SCP has published ApiPrefix in the SCP profile.	Primary routing	scheme://NF-P1.com:port	NF-P1ApiPrefix/<apiName>/<apiVersion>/apiSpecificResourceURI	While registering with NRF, the NF service published apiPrefix in NFProfile.

Table 3-53 (Cont.) 5G SBI Service Requests Processing

5G SBI Request Message Received at SCP			SBI Service Request to NextHop SCP			Forwarded SBI Service Request Message to Target NF			Description
3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	Routing Attempt	:authority Header	:path Header	-
						Alternate routing	scheme://NF-P2.com:port	{NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI	NF-P2ApiPrefix is used according to deployment and the apiPrefix value in the NFProfile for the service.
scheme://NF-P1.com:port/	scp.com:port	scpApiPrefix/<apiName>/<apiVersion>/apiSpecificResourceURI	scheme://NF-P1.com:port/	nextHopScp.com:port	{nextHopScpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI If the next hop SCP has published ApiPrefix in the SCP profile.	Primary routing	scheme://NF-P1.com:port	/<apiName>/<apiVersion>/apiSpecificResourceURI	NF service is not supporting apiPrefix and not published in NF Profile.
						Alternate routing	scheme://NF-P2.com:port	{NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI	NF-P2ApiPrefix is used according to deployment and the apiPrefix value in the NFProfile for the service.
scheme://NF-P1.com:port/NF-P1ApiPrefix	scp.com:port	/<apiName>/<apiVersion>/apiSpecificResourceURI	scheme://NF-P1.com:port/	nextHopScp.com:port	{nextHopScpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI If the next hop SCP has published	Primary routing	scheme://NF-P1.com:port	NF-P1ApiPrefix/<apiName>/<apiVersion>/apiSpecificResourceURI	SCP is deployed without apiPrefix in SCP profile.

Table 3-53 (Cont.) 5G SBI Service Requests Processing

5G SBI Request Message Received at SCP			SBI Service Request to NextHop SCP			Forwarded SBI Service Request Message to Target NF			Description
3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	Routing Attempt	:authority Header	:path Header	-
					ApiPrefix in the SCP profile.	Alternate routing	scheme://NF-P2.com:port	{NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI	NF-P2ApiPrefix is used according to deployment and the apiPrefix value in the NFProfile for the service.
scheme://NF-P1.com:port/	scp.com:port	/<apiName>/<apiVersion>/apiSpecificResourceURI	scheme://NF-P1.com:port/	nextHopScp.com:port	{nextHops cpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI If the next hop SCP has published ApiPrefix in the SCP profile.	Primary routing	scheme://NF-C1.com:port	/<apiName>/<apiVersion>/apiSpecificResourceURI	SCP and NF service are deployed without an api prefix in the NFProfile.
						Alternate routing	scheme://NF-C2.com:port	{NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI	NF-P2ApiPrefix is used according to deployment and the apiPrefix value in the NFProfile for the service.
Delegated Discovery 5G SBI request (Not Present)	scp.com:port	{scpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI	scheme://NF-P1.com:port/ Selected target notification URI	nextHopScp.com:port	{nextHops cpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI If the next hop SCP has published	Primary routing	scheme://NF-P1.com:port	{NF-P1ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI	apiRoot is created according to the published NFProfile based on discovery responses.

Table 3-53 (Cont.) 5G SBI Service Requests Processing

5G SBI Request Message Received at SCP			SBI Service Request to NextHop SCP			Forwarded SBI Service Request Message to Target NF			Description
3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	3gpp-sbi-target-apiRoot Header	:authority Header	:path Header	Routing Attempt	:authority Header	:path Header	-
					ApiPrefix in the SCP profile.	Alternate routing	scheme://NF-P2.com:port	{NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI	apiRoot is created according to the published NFProfile based on discovery responses.
Delegated Discovery 5G SBI request (Not Present)	scp.com:port	/scp-default-sub-notify-uri	scheme://NF-P1.com:port/Selected target notification URI	nextHopScp.com:port	{nextHops cpApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI If the next hop SCP has published ApiPrefix in the SCP profile.	Primary routing	scheme://NF-P1.com:port	{NF-P1ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI	apiRoot is created according to the published NFProfile based on discovery responses.
						Alternate routing	scheme://NF-P2.com:port	{NF-P2ApiPrefix}/<apiName>/<apiVersion>/apiSpecificResourceURI	apiRoot is created according to the published NFProfile based on discovery responses.

3.34 Message Priority Assignment and Override

The "3gpp-Sbi-Message-Priority" header is defined to carry the message priority of 5G messages. Service Communication Proxy (SCP) includes or modifies the header based on the configuration parameters.

The operator can assign or override the message priority of 5G messages as per their network requirements. SCP uses the message priority in prioritising the message in congestion or overload features.

Managing Message Priority Assignment and Override

Enable

Not applicable.

Configure

You can configure the Message Priority Assignment and Override functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure message priority options, see [Configuring SBI Message Priority](#).
- **Configure using REST API:** For information about how to configure message priority options, see "Configuring SBI Message Priority for Pod Overload Control" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.35 Outlier Detection

The Outlier Detection feature monitors the status of each endpoint of the producer NF or NF services. Upstream producer endpoints that continuously return the service responses with non-2xx status codes are removed from the routing pool for a predefined period based on the configured non-2xx status codes, counts, and ejection time.

In SCP 22.4.0, this feature is enhanced to support outlier detection for upstream NFs, which includes local producer NFs, next-hop SCP, and next-hop SEPP.

When SCP receives a message request from a consumer NF, it routes the message request to the target upstream NFs if the upstream NF is healthy. When SCP receives non-2xx status codes consecutively from the target upstream NF, SCP marks the upstream NF unhealthy after the number of error responses exceeds the preconfigured value. For example, if the `consecutiveErrors` parameter range is set to 5, after receiving five consecutive errors from upstream NF1, SCP marks the upstream NF1 as degraded or unhealthy. When SCP receives the sixth message request from the consumer NF, it routes the message request to upstream NF2 or any other available upstream NF without considering upstream NF1, which is marked unhealthy. SCP starts forwarding message requests to upstream NF1 after the configured time period as defined in the `baseEjectionTime` parameter. For more information about `consecutiveErrors` and `baseEjectionTime` parameters, see "Configuring Outlier Detection" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

For the next hop, SCP or SEPP, these error codes are SCP or SEPP-generated errors. These error responses contain a server header that includes the FQDN of SCP or SEPP.

Note

SCP resets outlier detection data for producer NF profile updates.

Managing Outlier Detection

Enable

To enable the Outlier Detection feature, complete the following configurations as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*:

- For specific NF service, set `odEnabled` to `true`, and then configure `odRuleName` as described in the "Configuring Routing Options" section.
- For Inter SCP scenarios, set `odEnabled` to `true` and configure `odScpRuleName` as described in the "Configuring System Options" section.
- For Inter PLMN routing scenarios, set `odSeppEnabled` to `true` and configure `odSeppRuleName` as described in the "Configuring System Options" section.

Configure

You can configure Outlier Detection feature using the CNC Console and REST API.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Global Options](#) and [Configuring Outlier Detection](#).
- **Configure using REST API:** For information about REST API configurations, see "Outlier Detection Configuration", "Configuring System Options", and "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.35.1 Next Hop SCP Outlier Detection

In SCP 25.2.201 and earlier releases, the Outlier Detection feature was used to identify and isolate degraded next hop SCPs. The consumer SCP (SCP-C) considered a producer SCP (SCP-P) as an outlier when the number of consecutively received error responses exceeded the threshold. The error responses were defined as follows:

- Configured list of error codes or configured failure conditions (connection error, timeout). These failure conditions were experienced by SCP-C while communicating with SCP-P.
- Error response contained SCP-P server header.

In inter-SCP scenarios, when SCP-C received error response from SCP-P containing server header as SCP FQDN, SCP-C was unable to determine whether the error was generated by SCP-P or the producer NF.

For example, when SCP-P experienced timeouts with all upstream producer NFs, it returned an SCP-generated error with the server header containing the SCP FQDN. SCP-C incorrectly marked SCP-P as an outlier even though SCP-P was healthy.

From SCP 26.1.201, SCP introduces the `oc-3gpp-sbi-od-info` header to help SCP-C determine if SCP-P is healthy or unhealthy while accessing a message response from SCP-P.

The `oc-3gpp-sbi-od-info` header is added to the response by SCP-P if:

- the server header is present in the response, and should contain SCP FQDN.
- the communication is established between SCP-C and SCP-P as part of inter-SCP scenarios.

When a consumer NF sends a message request to SCP-C, the request is forwarded to the target producer NF through SCP-P, which is selected by SCP-C. If the producer NF returns an error response, SCP-P forwards it as is to SCP-C.

In case SCP-P is unhealthy, SCP-P adds the `oc-3gpp-sbi-od-info` header to the error response towards SCP-C in the following format: `oc-3gpp-sbi-od-info: <SCP-FQDN> od=true`, for example, `oc-3gpp-sbi-od-info: SCP-scp11.3gpp.network.org od=true`. SCP-C marks SCP-P as outlier and performs rerouting to the next available SCP-P when the following conditions are met:

- `odHSupportEnabled` should be set to true.
- `od` must be set to true in the custom header format: `oc-3gpp-sbi-od-info: <SCP-FQDN> od=true`.
- HTTP error codes received by SCP-C must be configured in `reRouteConditionList`, which is part of the `routing-config/next-hop-proxy` REST API. For more information, see the "Configuring Next Hop Proxy Routing Config" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

In case SCP-P is healthy, it sets the value of `od` to false, SCP-C concludes that SCP-P is healthy and forwards the response received from the producer NF to the consumer NF as is.

Note

- SCP-C accesses the `oc-3gpp-sbi-od-info` header if `odHSupportEnabled` is set to true, which is the default behavior. For more information about `odHSupportEnabled`, see the `systemoptions` REST API the "Configuring System Options" section of *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- The default value of `odHSupportEnabled` is set to true for fresh SCP installation. However, this value is set to false when SCP is upgraded from a previous release to 26.1.201.

Managing Next Hop SCP Outlier Detection

Enable

By default, this feature is enabled at the time of SCP deployment.

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about the CNC Console configurations, see the following sections:
 - [Configuring Global Options](#): To configure service status of SCP in the **System Config** section.
 - [Configuring Routing Options](#): To configure reroute conditions using the **Reroute Condition List** field in the "Next Hop Proxy" section.
- **Configure using REST APIs:** To configure this feature using the REST APIs, see the following sections in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*:
 - "Configuring System Options": Configure `odhSupportEnabled` to control whether SCP-C should participate in the outlier detection header exchange with SCP-P or not.
 - "Configuring Next Hop Proxy Routing Config": Configure `reRouteConditionList` to define error conditions on which SCP-C attempts rerouting.

Observe

The `ocscp_worker_odh_response_tx_total` metric is used for this feature.

For more information about metrics, see [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.36 Circuit Breaking

The Circuit Breaking feature is triggered on a per NF service instance (including all of the service's IPEndpoints or FQDNs) when its outstanding transactions exceed a preconfigured value. If the outstanding transaction exceeds the preconfigured value and reselection is configured, the message requests are routed to reselected NFs. When Circuit Breaking is activated, message requests are routed to reselected NFs or rejected.

Managing Circuit Breaking

Enable

This feature is enabled using REST API parameters as per the following scenarios:

- For routing SBI messages directly to producer NFs, set `cbEnabled` to true in Routing Options REST APIs as described in "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- For routing notification messages directly to producer NFs, set `cbEnabled` to true in Routing Config Set REST APIs as described in "Routing Config Set" in *Oracle*

Communications Cloud Native Core, Service Communication Proxy REST Specification Guide.

- For InterPLMN and InterSCP routing, set `cbScpEnabled` and `cbSeppEnabled` to true in System Options REST APIs as described in "Configuring System Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Configure

You can configure this feature using the CNC Console and REST APIs.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Global Options](#) and [Circuit Breaking Configurations](#).
- **Configure using REST API:** For information about REST API configurations, see "Circuit Breaking Configurations", "Configuring System Options", "Routing Config Set", and "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.37 Canary Release

The Canary Release feature inspects the API version attribute of the NF service profile published by the NFs during NF registration or update. In case there is a new version of the API, Service Communication Proxy (SCP) identifies the version as a canary version if the version matches the configured value.

The older version is considered as the Production version and the new version of the service instance is considered as the Canary version. SCP distributes traffic between Production version and Canary version based on the operator configuration.

When the canary version's deployment is complete, the production version is upgraded to the canary version.

Managing Canary Release

Enable

You can enable the Canary Release functionality using the CNC Console or REST API.

- **Enable using CNC Console:** To enable the Canary Release feature, set the **Canary Release Flag** switch to **Enabled** as described in [Configuring Canary Release](#).
- **Enable using REST API:** To enable the Canary Release feature using REST API, set the `canaryReleaseFlag` parameter to true as described in "Configuring Canary Release

Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Note

Canary Release must be enabled for each service.

Configure

You can configure the Canary Release functionality using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure Canary Release, see [Configuring Canary Release](#).
- **Configure using REST API:** For information about how to configure Canary Release, see "Configuring Canary Release Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.38 Static Configuration of NF Profiles

The Static Configuration Fallback feature provides a static configuration of NF profiles when georedundant NRFs in the network fail. Under failure conditions, when NRF is not configured, or when static configurable routing is preferred, Service Communication Proxy (SCP) uses the user configured or updated NF profiles. SCP retains the 5G topology information from NRF for further operations. It allows fallback to a static mode of operation for modifying the previously discovered NF producer profiles through NRF and adds any new NF producer profile while the NRFs are unavailable.

The following configurations are used for the Static Configuration Fallback feature:

- **TopologySourceInfo:** This is the configuration used by SCP to determine the 5G topology source. SCP learns and creates the routing rules accordingly.
- **5G NF topology information:** This information is available with SCP after learning the 5G topology from the defined source as per the previous section configuration either from NRF or a static method.
- You can create or modify the 5G NF profile information using REST APIs.

Managing Static Configuration

Enable

You can enable the Static Configuration feature by setting the `scpcconfiguration.defaultTopologySource` parameter to `LOCAL` in the `scpc` configuration section of the `values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

Configure

You can configure the Static Configuration feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about how to configure the Static Configuration feature, see [Configuring Topology Source Info](#).
- **Configure using REST API:** For information about how to configure the Static Configuration feature, see "Configuring NF Topology Groups" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.39 Preventive Audit on Last NF Instance

SCP determines the network topology from NRF by subscribing to each NF type. When a new NF instance is registered in the network, SCP receives a registration notification from the NRF and creates a routing rule based on the NF profile in the notification.

SCP removes the routing rule for an NF instance after receiving a deregistration notification from NRF.

When the primary NRF communication breaks, the producer NF registers with the configured secondary NRF. In case the primary NRF is not notified about this reregistration, then it sends a deregistration notification to SCP. This results in the removal of the routing rule at SCP. Also, it causes network failure if repeated for multiple NF instances.

With the introduction of the Preventive Audit on Last NF Instance feature, SCP can control NRF failure scenarios in the network by performing the preventive audit (discovery). This audit is performed with all the configured regional NRFs before removing the last NF instance of a particular NF type. If any NRF returns the success discovery response with NF profiles, SCP

creates the routing rules based on the discovery response. SCP raises an alert to notify operators about such NRF failure scenarios.

Managing Preventive Audit on Last NF Instance

Enable

You can enable the Preventive Audit on Last NF Instance feature by setting the `preventiveAuditOnLastNFInstanceDeletion` parameter to `true` in the global parameters section of the `values.yaml` file. For more information about this parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

Configure

There is no specific configuration required for the Preventive Audit on Last NF Instance feature.

Observe

There is no specific metrics and alerts required for the Preventive Audit on Last NF Instance feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.40 Rate Limiting

Service Communication Proxy (SCP) provides the Rate Limiting feature to:

- protect the network from consumer NFs that might overload the network with service requests.
- protect the producer NF instance from getting overloaded.

3.40.1 Local Rate Limit Feature

SCP uses the token bucket algorithm in the Rate Limit feature functionality to track the allowed and consumed tokens in a given time period as per rate limit configuration.


In the following ways SCP uses the distributed cache to aggregate the token consumption across `scp-worker` pods of an SCP instance:

1. Over a 1 second time period, the rate limit framework divides the configured rate into smaller slots of 100milliseconds each.
2. SCP monitors the difference between the actual request message rate received and the total request messages, i.e., allowed to send in the 100 milliseconds window as calculated.
3. Each SCP worker pod also calculates its own share of the total request message sent and accordingly decides on a batch of tokens to be preconsumed.
4. If at any time the scp-worker POD is not able to get a token, the request message is treated with rate limit treatment as per rate limit configuration.

① Note

- The prediction of token batch count depends on the traffic rate detected in scp-worker PODs; hence, irregular traffic may lead to more token consumption by scp-workers. This may result in a difference between the overall message rate allowed and the configured rate.
- The rate limit framework expects a uniform traffic pattern over a second period for a configured rate.

Figure 3-10 Local Rate Limit Feature Functional View

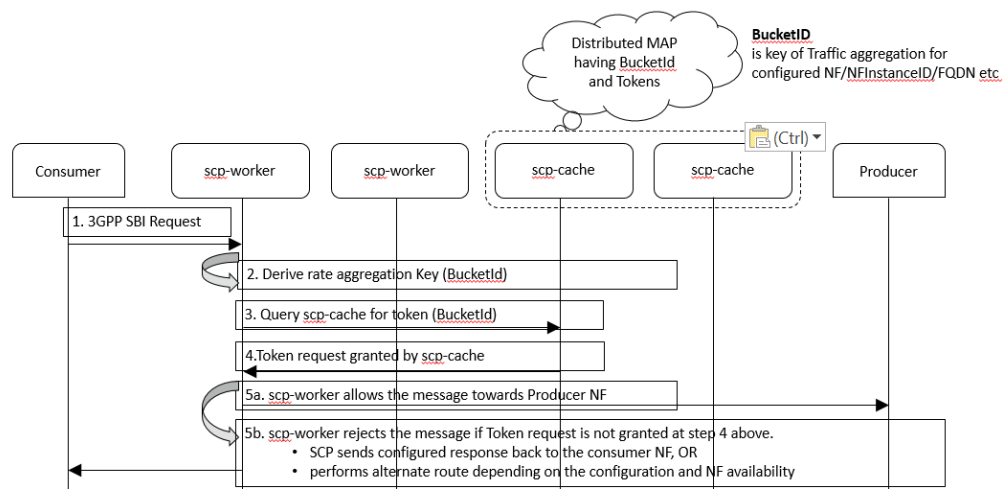

3.40.2 Global Rate Limit Feature

The global rate limit feature aggregates traffic rate data across multiple SCP instances and applies traffic rate control based on the configured aggregated rate.

The aggregated rate is configured at each SCP instance in the following way:

1. Each SCP instance monitors its own traffic routed count against the configured NF, NFInstanceId, FQDN, and so on, and reports the same to all other SCP instances.

2. Each SCP instance aggregates the total traffic routed against the configured NF, NFInstanceID, and FQDN from all SCP instances.
3. Each SCP also calculates its own share of routed traffic in the aggregated total routed traffic count, as well as the status of the difference between total routed traffic and the configured aggregated rate.
4. Global Rate Limit Control actions such as allowing or disallowing traffic are decided based on the data collected in the steps above.

Note


Convergence of global rate data aggregation depends on network latency among the SCP instances, and higher latency can impact rate-limiting performance.

Global Rate Working Principle

The working principle are as follows:

1. Each SCP instance has an aggregation cache, which syncs its own traffic route count with other SCP instances.
2. In this aggregation cache, a routed traffic rate count is maintained for each SCP instance.
3. Each SCP instance calculates the total traffic routed towards the configured NF, NFInstanceID, FQDN, and so on.
4. For example, the diagram depicts the aggregated routed traffic count for a FQDN, "udm.test.com," across all 3 SCP instances.
 - Sample configuration 1: A global rate limit is configured in 3 SCP instances for FQDN "udm.test.com" with a rate of 15000 per sec.
 - Sample configuration 2: A global rate limit is configured in 3 SCP instances for FQDN "udm.test.com" with a rate of 13000 per sec.
5. The global rate limit control action, such as allowing or disallowing the traffic, is decided based on the aggregated routed traffic count collected.
 - Action for configuration 1: Traffic is allowed since the total traffic routed rate is less than 15000 per sec.
 - Action for configuration 2: Traffic is throttled since the total traffic routed rate is greater than 13000 per sec.

Figure 3-11 Global Rate Limit Working Principle

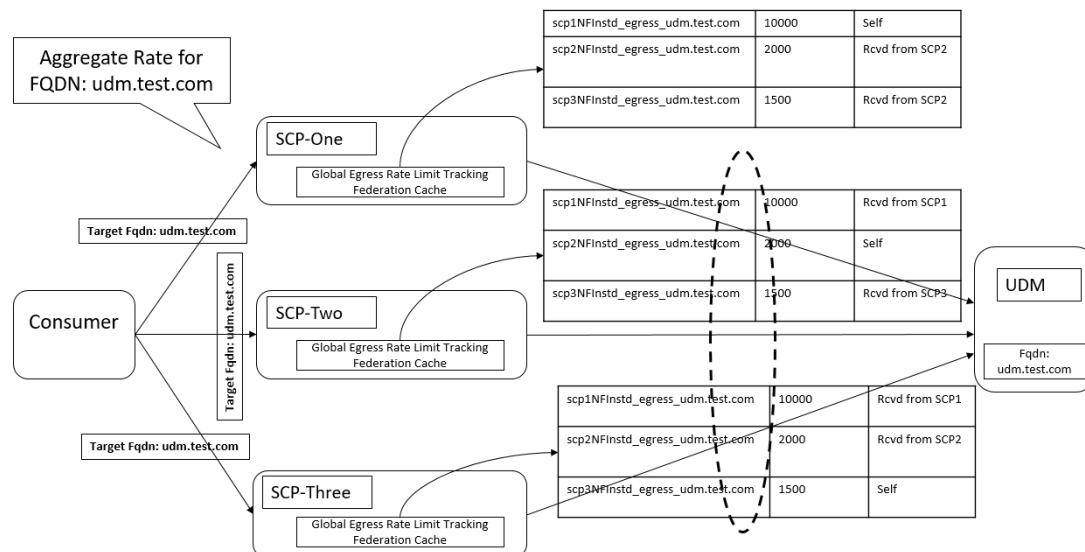

SCP supports rate limiting at the ingress and egress side.

If the SCP-cache service is unavailable, then SCP-worker continues to process service requests, however, rate limiting is not applied. If any SCP-worker is unavailable, it cannot move to the Ready state until SCP-cache initializes the rate limiting.

Note

- The Rate Limit framework depends on the ingress traffic pattern at SCP, and its variation reflects in traffic rate detection and applies throttling of messages in a distributed environment since it involves convergence of message rate for a specific rate limit configuration, for example, a configured allowed rate value for a specific FQDN of an NF service instance across multiple scp-worker service pods.
- The average allowed traffic rate with rate control may be achieved as per the configured allowed traffic rate over a few seconds. The instantaneous allowed traffic rate with rate control may have some variation with respect to the configured allowed traffic rate on a short time scale.

The following sections explain how the SCP Rate Limiting feature controls ingress and egress traffic.

3.40.3 Ingress Rate Limiting

The Ingress Rate Limiting feature protects the network from unsecured consumer NFs that might overload the network with message requests. SCP secures the network when aggregated ingress traffic from any registered NF instance exceeds the allowed traffic rate limit. If the traffic exceeds the allowed traffic rate limit, SCP does not process the traffic and responds with an error code. Operators can configure the error code. Otherwise, the default error code 429 is set.

With the enhanced Ingress Rate Limiting functionality, SCP can use the User-Agent or XFCC header in the ingress message request to identify the consumer NF and apply ingress rate limiting at the ingress side.

The traffic rate limit is set at the NF type level that is applicable for all NF instances. SCP obtains the FQDN of consumer NF from the x-forwarded-client-cert (XFCC) header in the incoming message request. SCP provides the configuration for ingress "allowed requests/sec" per NF type. This configuration is applicable for all NF instances of the NF type.

As most of the network do not provide XFCC header in the ingress message requests, SCP cannot rely on the XFCC header to fetch consumer NFs' identity. Therefore, as recommended by 3GPP, the User-Agent header can be added to service request by the consumer NF to communicate its identity. The User-Agent header is added to each ingress message request irrespective of the network type. This header contains consumer NF identity in the different formats.

SCP supports the following types of User-Agent header formats to retrieve the consumer NF identity:

- **Format1:** NFTYPE-NFINSTANCEID FQDN or NFTYPE-NFINSTANCEID-FQDN
- **Format2:** NFTYPE-FQDN NFINSTANCEID or NFTYPE-FQDN-NFINSTANCEID
- **Format3:** NFTYPE-NFINSTANCEID
- **Format4:** NFTYPE-FQDN

Where,

- NFTYPE indicates the type of consumer NF.
- NFINSTANCEID indicates the instance ID of the consumer NF.
- FQDN indicates the FQDN of the consumer NF.

Using the aforementioned parameters of User-Agent header, SCP obtains the consumer NF information and applies ingress rate limiting at the ingress side. SCP uses the ConsumerInfo REST API parameter to determine the header type such as XFCC or User-Agent, in the ingress message request. For more information about the ConsumerInfo REST API parameter, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

SCP determines consumer NF identity such as NFTYPE, NFINSTANCEID, or FQDN, from the User-Agent header and applies the ingress rate limiting configurations in the following sequence:

1. NFINSTANCEID
2. FQDN
3. NFTYPE

If SCP determines any one of the configurations as per the order, SCP stops searching for the remaining configurations and uses the retrieved configurations for ingress rate limiting.

Example of Ingress Rate Limiting Configuration

You can configure ingress request rate for all NF instances of an NFType so that this configuration is applicable for all NF instances. You can configure MPS for a single NF instance identified by FQDN.

There are 10 Session Management Functions (SMFs) determined by SCP. The maximum traffic limit for all SMFs except for SMF3, SMF4, and SMF7 is 1000 MPS.

1. The maximum ingress requests limit from SMF3 is 600 MPS.

2. The maximum ingress requests limit from SMF4 with instance ID 26740918-e9cd-0205-aada-71a76214d33c is 200 MPS.
3. The maximum ingress requests limit from SMF7 is 400 MPS.

Table 3-54 Example of Ingress Rate Limiting Configuration

Exception	NFType	FQDN	NF Instance ID	MPS
NA	SMF	-	-	1000 MPS
1	-	smf3.example.com	-	600 MPS
2	-	smf7.example.com	-	400 MPS
3	-	-	26740918-e9cd-0205-aada-71a76214d33c	200 MPS

Note

The NF Instance ID parameter is used only in the User-Agent header.

Ingress Rate Limiting Process Using the User-Agent or XFCC Header Parameter

SCP uses the values of `primaryHeaderName` and `secondaryHeaderName` in the `ConsumerInfo` REST API parameter to identify the consumer NF in an ingress message request. When SCP receives an ingress message request, it searches for the `primaryHeaderName` value and follows the following methods to apply ingress rate limiting:

- If SCP finds `primaryHeaderName`, it considers the configured value such as XFCC header or User-Agent header, to identify the consumer NF and uses the configurations that match the consumer NF identity to apply ingress rate limiting. If SCP does not find any configurations for consumer NF, it does not apply ingress rate limiting.
- If SCP does not find `primaryHeaderName`, it searches for `secondaryHeaderName` and considers the configured value such as XFCC header or User-Agent header, to obtain the identity of the consumer NF and uses the configurations that match the consumer NF identity to apply ingress rate limiting. If SCP does not find any configurations for consumer NF, it does not apply ingress rate limiting.
- If SCP does not find `secondaryHeaderName`, it does not apply ingress rate limiting.

Managing Ingress Rate Limiting**Enable**

The Ingress Rate Limiting feature is a core functionality of SCP. This feature is automatically enabled in SCP at the time of deployment.

Configure

You can configure the Ingress Rate Limiting feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about configuring the Ingress Rate Limiting feature, see [Configuring Ingress Rate Limiter Consumer Info](#) and [Configuring Ingress Rate Limiting](#).
- **Configure using REST API:** For information about configuring the Ingress Rate Limiting feature, see "Configuring Ingress Rate Limiting" and "Configuring Consumer NF Info" in

*Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide.***Observe**

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.40.4 Egress Rate Limiting

The Egress Rate Limiting feature protects the registered producer NF instance from getting overloaded. With this feature, SCP secures the network when aggregated egress traffic towards an NF instance exceeds the allowed traffic rate limit.

If the traffic exceeds the allowed limit, SCP performs reselection by default and route the request to reselected NF. In case reselection is not configured, SCP responds with an error code.

Operators can configure the error code. Otherwise, the default error code 503 is set.

To determine the destination of the request, SCP checks the API root and authority information in the request header. SCP also checks the service name and path to identify the service type in the request header. Considering this information, SCP provides the configuration for "egress allowed requests/sec" per NF type. This configuration is applicable for all NF instances of the NF type.

Example of Egress Rate Limiting Configuration

You can configure Messages Per Second (MPS) for all NF instances of an NFType so that this configuration is applicable for all NF instances. You can configure MPS for single NF instance identified by FQDN.

There are 4 UDMs determined by SCP. The maximum traffic limit for all UDMs with the following exceptions is 400 MPS:

1. The maximum traffic limit for UDM3 is 500 MPS.
2. The maximum traffic limit for SDM service for all UDMs is 200 MPS.
3. The maximum traffic limit for UMD1 UECM service is 100 MPS.
4. The maximum traffic limit for UDM4 UEAU service is 600 MPS.

Table 3-55 Example of Egress Rate Limiting Configuration

Exception	NFType	FQDN	Service Name	MPS
NA	UDM	-	-	400
1	-	Udm3.example.com	-	500

Table 3-55 (Cont.) Example of Egress Rate Limiting Configuration

Exception	NFType	FQDN	Service Name	MPS
2	-	-	Nudm_sdm	200
3	-	Udm1.example.com	Nudm_uecm	100
4	-	Udm4.example.com	Nudm_ueau	600

Managing Egress Rate Limiting

Enable

The Egress Rate Limiting feature is a core functionality of SCP. This feature is automatically enabled in SCP at the time of deployment. To allow rate limit to occur, you must enable either per NF rate limit or make entries in the Egress table using the CNC Console.

Configure

You can configure the Egress Rate Limiting feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about configuring the Egress Rate Limiting feature, see [Configuring Egress Rate Limiting](#).
- **Configure using REST API:** For information about configuring the Egress Rate Limiting feature, see "Configuring Egress Rate Limiting" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).


3.40.4.1 Global Egress Rate Limiting

The existing egress rate limiting functionality aggregates traffic rate for a target producer NF within one SCP instance across multiple pods of SCP-worker service. It does not aggregate the overall traffic rate towards the producer NF across multiple SCP instances. Therefore, the Global Rate Limiting feature is implemented so that a group of SCP instances coordinates among each other to ensure traffic rates for common destinations, that is, producer NFs, are aggregated and the egress rate limit is applied to the overall traffic rate.

The Global Egress Rate Limiting feature synchronizes and aggregates the egress rate data for multiple producer NFs among multiple SCP instances (up to three SCP instances). Based on the aggregated rate data, each SCP controls its traffic to ensure the global configured egress rate is achieved.

The SCP-cache microservice synchronizes egress rate data among multiple SCP instances. The participating SCP instances for the egress rate limiting aggregation details are configured using Helm as described in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*. SCP uses an Oracle product called Oracle Coherence which offers federated caching to link multiple clusters so that cache data is automatically synchronized between clusters.

Figure 3-12 Role of SCP-Cache

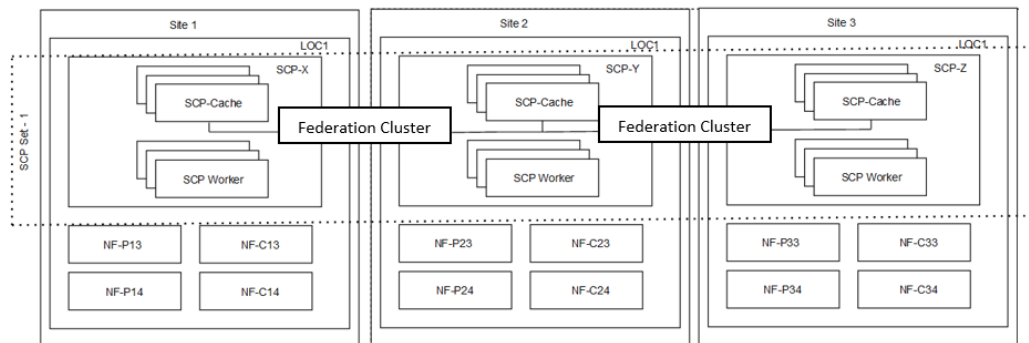

By default, the egress rate aggregation is disabled. After enabling the Global Egress Limiting feature using the `global_egress_ratelimit` parameter on the CNC Console, the egress rate aggregation uses `remoteScpOneEnabled` and `remoteScpTwoEnabled` parameters to enable rate data synchronization and aggregation with the corresponding remote instances of SCP. If the rate aggregation and synchronization are disabled or the communication fails with a remote SCP instance, the Global Egress Rate Limiting feature does not consider that remote SCP as part of the Global Federation cluster. Therefore, Global Rate Limit Algorithm does not consider any message rate related updates from that remote SCP while applying the rate limit.

Managing Global Egress Rate Limiting

Enable

You can enable this feature by setting `global_egress_ratelimit` to `true`. For more information, see [Configuring SCP Features](#).

Configuring Participating SCP for Global Egress Rate Limit

Perform the following configuration while deploying SCP.

1. If the following Helm parameters of the participating SCP instances are available, add the required Helm parameters in case a single instance of SCP is used or add all the parameters in case both the instances of SCP are used to the `custom-values.yaml` file:
 - `coherence.federation.remoteScpOne.fqdnOrIp`
 - `coherence.federation.remoteScpOne.port`
 - `coherence.federation.remoteScpOne.clusterName`
 - `coherence.federation.remoteScpOne.nfInstanceId`
 - `coherence.federation.remoteScpTwo.fqdnOrIp`
 - `coherence.federation.remoteScpTwo.port`

- `coherence.federation.remoteScpTwo.clusterName`
 - `coherence.federation.remoteScpTwo.nfInstanceId`
2. Deploy SCP as described in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.
 3. Enable global egress rate aggregation and control with the participating SCP instances using the CNC Console as described in [Configuring SCP Features](#).

Perform the following configuration if SCP is deployed.

1. Perform the same release upgrade using the following Helm parameters for the participating SCP instances in the `custom-values.yaml` file. Add the required parameters if one instance of SCP is used, otherwise add all the parameters if both the instances of SCP are used.
 - `coherence.federation.remoteScpOne.fqdn0rIp`
 - `coherence.federation.remoteScpOne.port`
 - `coherence.federation.remoteScpOne.clusterName`
 - `coherence.federation.remoteScpOne.nfInstanceId`
 - `coherence.federation.remoteScpTwo.fqdn0rIp`
 - `coherence.federation.remoteScpTwo.port`
 - `coherence.federation.remoteScpTwo.clusterName`
 - `coherence.federation.remoteScpTwo.nfInstanceId`

Only the `scp-cache` microservice restarts.

2. Enable global egress rate aggregation and control with the participating SCP instances using the CNC Console as described in [Configuring SCP Features](#).

Configure

You can configure this feature using Helm and REST API.

- **Configure using Helm:** For information about Helm configurations, see "global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

- **Configure using REST API:** For information about REST API configurations, see "Configuring Egress Rate Limiting and Global Egress Rate Limiting" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.40.5 Egress and Ingress Key Combinations

This section provides information about different key combinations and key formats required to configure ingress and egress rate limiting entries.

Operators can use these key combinations for aggregating traffic to apply rate limit. The key format is obtained from the JSON body of the Rate Limiting configuration request.

Note

Operators must perform the search in the same sequence as mentioned in the following tables.

Table 3-56 Egress Key Combination

Sequence	Key Combination	Key Format
1	FQDN & ServiceType	FQDN_ServiceType
2	FQDN & NFType	FQDN_NFType
3	FQDN	FQDN
4	ServiceType	NFInstanceId_serviceType Note: Look up NFInstanceId from Learnt NFProfiles using FQDN.
5	NFType	NFInstanceId Note: Look up NFInstanceId from Learnt NFProfiles using FQDN.

Table 3-57 Ingress Key Combination

Sequence	Key Combination	Key Format
1	NfInstanceId	NfInstanceId of the consumer NF.
2	FQDN	FQDN
3	NFType	NFInstanceId Note: Look up NFInstanceId from Learnt NFProfiles using FQDN.

3.41 Support for Multus Container Network Interface

Multus Container Network Interface (CNI) is a plug-in that allows you to connect multiple network interfaces to pods in Kubernetes.

Each Kubernetes pod contains only one network interface. After integrating Multus CNI with SCP, you can create multiple interfaces in a pod and perform the following tasks:

- Create multiple signaling interfaces for routing the signaling traffic
- Create different interfaces for Operations, Administration, and Maintenance (OAM) and Signaling (SIG) traffic to enable traffic segregation


This feature configures the pods to use different network interfaces for different types of traffic. These interface IPs and routing information, such as range of IPs and gateways, are provided by Network Attachment Definition (NAD) Kubernetes custom resource. Multus CNI configures the IP routing rules based on this routing information.

For more information about Multus CNI, see <https://github.com/k8snetworkplumbingwg/multus-cni>.

Note

Default Pod IPs assigned by Kubernetes are used for establishing pod-to-pod and egress communication. When Multus CNI adds other network interfaces to pods, these interface IPs can be used for egress communication.

Figure 3-13 Networking-Multus Support

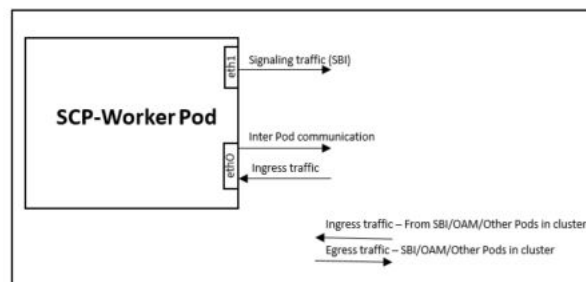

The diagram shows how support for Multus helps SCP to support multiple interfaces on egress traffic from the scp-worker pod.

Note

The Multus requirement is not applicable for SCP Control Pods.

The scp-worker pod is handling the following types of traffic:

- 5G SBI traffic

- Inter-pod communication traffic
- OAM traffic is communication traffic between observability components and scp-worker

The directions of this traffic are to and fro via SCP, and hence they are present in ingress and egress directions. There is no segregated ingress traffic. Only egress traffic is separated over multiple interfaces by dedicating Virtual network interface controllers (vNICs) to manage each type of traffic:

- Eth0 vNIC manages Egress (inter-pod communication traffic).
- Eth1 vNIC manages Egress 5G SBI traffic.

It is not required to separate OAM traffic from signaling traffic.

Managing Multus Container Network Interface

Enable

The Multus CNI plug-in can be integrated with Service Communication Proxy (SCP) at the time of SCP installation.

Configure

To use this feature, complete the configuration as described in "Configuring Multus Container Network Interface" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

Observe

There is no specific metrics and alerts required for Multus Container Network Interface.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.42 Support for Model C Indirect 5G SBI Communication

5G Service Based Interface (SBI) communication models are used to establish connections among NFs and NF services. These communication models facilitate consumer NFs to route service requests to producer NFs either directly or indirectly through Service Communication Proxy (SCP). For more information about different communication models, such as Model A, Model B, Model C, and Model D, see 3GPP TS 23.501 version 16.6.0 Release 16.

With the introduction of the Model C Indirect 5G SBI Communication format in SCP, the consumer NF sends NF discovery service requests to NRF. After receiving the discovery response with NF profiles, the consumer NF does the following:

- Selects an NF Set or a specific NF instance from the NF Set
- Sends a service request to SCP with the address of the selected service producer NF
- Creates multiple network interfaces for different subnet IPs

Where,

- NF Set is a group of interchangeable NF instances of the same type that supports the same services and the same Network Slices. NF instances in the same NF Set may be geographically distributed but have access to the same context data.
- NF instance is an instance of the NF that can be identified.
- NF Set Identifier (NF Set ID) is a globally unique identifier of a set of equivalent and interchangeable CP NFs from a given network that provides distribution, redundancy, and scalability.

Then, SCP selects an NF service instance and routes the service requests to the selected producer NF. In case of failure if reselection is required, SCP selects the producer NF instance based on the NF Set. The reselection is based on the binding header, if available.

Support for Binding Headers in Model C Indirect 5G SBI Communication

SCP supports the following 5G SBI custom headers in Model C Indirect 5G SBI Communication:

- 3gpp-Sbi-Binding: This header contains a comma-delimited list of Binding Indications from an HTTP server for storage and use of HTTP clients. The absence of this parameter in a Binding Indication in a service request is interpreted as "callback".
- 3gpp-Sbi-Routing-Binding: This header contains a Routing Binding Indication to direct service request to an HTTP server which has the targeted NF service resource context.

SCP does not update the value of the "3gpp-Sbi-Binding" header in the HTTP/2 request or response. It supports reading value of the "3gpp-Sbi-Routing-Binding" header in the service request and uses the binding level in the "3gpp-Sbi-Routing-Binding" header to perform routing.

Note

Binding level NF service Set and NF service instance are not supported.

Support for Load Balancing and Alternate Routing in Model C Indirect 5G SBI Communication

When the target producer NF is unavailable, then SCP determines the NF Set ID of the target producer NF and performs alternate routing on the NF ID set instances in a sequence until SCP completes all the configured routing attempts.

SCP uses the NF set or NF instance for load balancing and alternate routing.

Support for Reverse Lookup in Model C Indirect 5G SBI Communication

When forward routing fails due to unavailability of the producer NF or the message does not have the NF Set ID, SCP performs reverse lookup in learned NF profiles. It performs alternate routing by obtaining destination information from the Set IDs. Reverse Lookup occurs when

"3gpp-Sbi-Discovery-Target-Nfset" and "3gpp-Sbi-Routing-Binding" headers are absent in the message.

Model C Indirect 5G SBI Communication Response Headers

Additional response headers supported by Model C Indirect 5G SBI Communication in case of alternate routing are as follows:

- "3gpp-Sbi-Producer-Id"
- Either "3gpp-Sbi-Target-apiRoot" or Location header

Note

Load Balancing or Forward Routing from routing options can not be configured with Release 16 of Model C Indirect 5G SBI Communication because forward routing occurs based on the "3gpp-Sbi-Target-apiRoot" header. If the "3gpp-Sbi-Target-apiRoot" header is unavailable, then only load balancing occurs based on NF Set ID in the binding header.

Managing Model C Indirect 5G SBI Communication

Enable

You can enable the Model C feature by adding `- rel16` under `releaseVersion` in the `ocscp-custom-values-<scp_release_number>.yaml` file. For more information about enabling this feature, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

Configure

You must complete the fetching routing information configuration as described in "Fetching Release 16 Routing Rules" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.43 Multiple SCP Deployment in the Same Kubernetes Cluster

This feature allows operators to deploy multiple SCP instances in the same Kubernetes cluster. Each SCP instance is deployed in a different namespace and is independent of the others. These SCP instances can use the same cnDBTier with a unique database name or a dedicated cnDBTier during the installation. scpFqdn is included as part of the SCP logs, metrics, and alerts to identify and filter logs, metrics, and alerts at Grafana or Kibana when multiple SCP instances are deployed in the same Kubernetes cluster.

Managing Multiple SCP Deployment in the Same Kubernetes Cluster

Enable

Not applicable.

Configure

There is no specific configuration required for this feature. The following new dimensions are added to the respective metrics in the [Metrics](#) section:

- scpFqdn (for data plane)
- scp_fqdn (for control plane)

Observe

There is no specific metrics and alerts required for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.44 Support for SCP Triplet Deployment

Using the Service Communication Proxy (SCP) Triplet Deployment model, operators can configure three SCP instances as mates for georedundancy. Each SCP instance in a triplet is configured to manage the overall traffic expected for the triplet so that when two SCP instances are unavailable, the single SCP instance can manage the overall traffic. For example, if the first and the second SCP instances are unavailable, then the third instance is dimensioned to manage the load of the first two instances.

With this feature, SCP can:

- configure two mated SCP.
- support forward routing, load balancing, and alternate routing to producers in its serving localities and serving localities of its mates.
- route the service request directly to any producer in its serving localities and serving localities of its mates.

- support inter-SCP routing to producers which are not in its serving localities and serving localities of its mates.
 - When the SCP serving a particular locality is unavailable, then service requests are routed to mated SCPs based on priority.
 - When multiple SCPs with the same priority are serving the producer's locality, SCP supports load balancing.

Managing SCP Triplet Deployment

Enable

Not applicable.

Configure

To use this feature, complete the configuration as described in "global Parameters" in *Oracle Communications Cloud Native Core, Cloud Native Environment Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

Observe

For information about metrics, see [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.45 Alternate Routing based on the DNS SRV Records

Using the Alternate Routing based on the Domain Name System (DNS) Service (SRV) Records feature, SCP performs alternate routing by querying SRV records with the DNS server to find an alternate producer NF and route the service request.

Note

- SCP uses either NF Set or DNS SRV Records to perform alternate routing.
- This feature is supported only in SCP Release 16 deployment with Model C Indirect 5G SBI Communication. For more information about Release 16, see 3GPP TS 23.501.

SCP performs the DNS SRV query for the FQDNs determined from NF profiles to find an alternate NF instance and route the services requests to the newly discovered alternate producer NF. These FQDNs are sourced from Network Repository Function (NRF) notifications received at SCP and from operator's configuration, which is statically configured through scpc-configuration as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

The DNS SRV Resource record known as Service Proto Name (SPN) is used to identify the target NF type. If there are multiple instances of the same alternate NF profiles in a DNS resolution response for handling the same service request, then the appropriate target producer NF is selected using priority and weight attributes provided in the DNSSRVRecord data model as described in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

This feature introduces the scpc-alternate-resolution microservice to perform the following tasks:

- Find alternate NF services by sending DNS SRV queries to the DNS server and receive the DNS SRV responses.
- Refresh DNS SRV records to get update in DNS SRV records.
- Provide DNS SRV records to scp-worker when required.

DNS SRV Default Scheme

SCP obtains FQDNs from the NF profiles and creates alternate routing records for each FQDN. Alternate routes are obtained by querying the configured DNS server. To query the DNS server, SCP creates an SPN entry for each FQDN by determining the scheme, such as http or https, for each FQDN.

Example of an SPN entry is as follows:

```
_http._tcp.udm1svc.scpsvc.svc.cluster.local
```

In an NF profile, FQDNs are available at the profile level and service level. For service level FQDNs, the scheme is defined at the service level. However, for profile level FQDNs, the scheme is not defined in the profile. Earlier, SCP used "http" as the default scheme for profile level FQDNs when creating SPNs. However, for operators who use "https", this results in not getting alternate routes for the profile level FQDN from the DNS server.

Therefore, the following Helm configuration is introduced to determine the scheme to be used for SPN creation for profile level FQDNs:

```
dnsSrvSchemeConfig:
  defaultScheme: "https"
  exceptionList: [""]
```

defaultScheme is the default scheme used for creating Domain Name System (DNS) Service (SRV) Service Proto Name (SPN) from NF profile level FQDN. SCP also supports per NF type scheme selection. This is achieved by exceptionList, which defines the NF types that use a non-default scheme. For example, if defaultScheme is "https" and exceptionList has ["UDM", "AUSF"], then SPNs created from profile level FQDNs of UDM and AUSF will have "http" as the scheme, and all other NF types will have "https" as the scheme. For more information about defaultScheme and exceptionList, see "Global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

The default value in the Helm configuration indicates that the previously used value of "http" has been changed to "https".

Managing Alternate Routing based on the DNS SRV Records

Enable

This feature is enabled by setting the `dnsSRVAlternateRouting` parameter to `true` in the `custom-values.yaml` file. For more information, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

Configure

You can configure the Alternate Routing based on the DNS SRV Records feature using Helm, REST API, and the CNC Console.

- **Configure using Helm:**
 - For information about configuring `defaultScheme` and `exceptionList`, see "Global Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.
 - For information about configuring the `scpc-alternate-resolution` microservice parameters, see "scpc-alternate-resolution Parameter" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.
- **Configure using CNC Console:** For information about the **Routing Options** tab to enable alternate routing configuration and set alternate route modes, see [Configuring DNS SRV based Alternate Routing](#).
- **Configure using REST API:** For information about the `alternatenfgroup` parameter to manage the alternate NF group configuration data that is configured for the corresponding query parameters, see "Configuring Alternate NF Group" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.46 Support for Multiple Signaling Service IPs

In the previous release, SCP supported only one signaling IP from a given network. This IP was exposed to all NFs to establish 5G Service Based Interface (SBI) communications.

With the support for multiple signaling IPs, SCP can expose multiple signaling service IPs from the same or a different network to all NFs to accept 5G SBI signaling traffic (ingress connections).

Note

SCP supports 8 signaling IPs.

This feature provides the flexibility to achieve maximum redundancy in the IP path. 5G NFs can have more than one SCP's destination IPs for the transport network to select different paths for each of the IPs. Therefore, a single SCP instance is available through more than one IP path if one of the transport network paths fails.

Using this feature, you can do the following:

- Improve resiliency in 5G core network during transport failure by enabling multiple signaling paths.
- Create dedicated signaling service paths by configuring multiple service signaling IPs.

Managing Multiple Signaling IPs

Enable

This feature is enabled automatically in SCP at the time of deployment.

Configure

The `serviceSpecifications` Helm parameter is introduced as part of this feature. To use this feature, complete the configuration as described in "Configuration Parameters" in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

To add or remove signaling services, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Observe

For information about metrics, see [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.47 Egress Congestion Control Support at SCP

When Service Communication Proxy (SCP) receives a 5G Service Based Interface (SBI) message request from a consumer NF, SCP forwards the message request to a target producer NF. If the producer NF is overloaded, SCP performs reselection to find another equivalent producer NF. In case no equivalent producer NF is available, then SCP sends an error response to the consumer NF with the configured error code. For more information about configuring error codes, see [Configuring SBI Message Priority and Error Profiles for Egress Congestion Control](#).

Support for 3GPP SBI Message Priority

With the introduction of this feature, SCP uses the SBI message priority value present in the "3gpp-Sbi-Message-Priority" header to categorize a 5G SBI message request as high or low priority. The message request is prioritized based on the value of the "3gpp-Sbi-Message-Priority" header. By default, SCP considers 24 as the priority for the ingress message request if the message does not have the "3gpp-Sbi-Message-Priority" header. If the priority of the ingress message request is less than the value of the SBI Message Priority Discard From parameter, which is defined in [Configuring SBI Message Priority and Error Profiles for Egress Congestion Control](#), then these messages are considered as high priority messages.

When SCP receives a high priority message request and the target producer NF is overloaded, SCP performs reselection to find an equivalent producer NF. If no equivalent producer NF is available, then SCP forwards the high priority message to the same target producer NF that is overloaded.

When SCP receives a low priority message request, SCP forwards the message request to a target producer NF. If the producer NF is overloaded, SCP performs reselection to find another equivalent producer NF. In case no equivalent producer NF is available, then SCP sends an error response to the consumer NF with the configured error code.

Egress Congestion Control for Producer NF

The following subsections describe the egress congestion control for producer NFs.

Egress Congestion Control based on Busy Producer NF

SCP, based on the response status codes 503, 429, and 307 with the Retry-After header in the response, removes the producer NF from its routing list for a period specified in the Retry-After header. This behavior is applicable if the Retry-After header is present in the response.

Egress Congestion Control based on Reported Producer NF Service Load

The NRF reports the load of a producer NF through a notification. After detecting that the producer NF load is at or above the alternate routing onset threshold but below the throttle onset threshold, SCP attempts to perform a reselection and route message requests designated for the initial producer NFs to other NFs wherever possible.

If message requests cannot be routed to reselected NFs, they are routed to the producer NF. The behavior continues until the producer NF load reported decreases below the abatement threshold. If the load reported by the NF exceeds the throttle onset threshold, all requests are sent to reselected producers wherever possible and if requests cannot be sent to reselected producers, they are rejected with a configurable error response code. SCP supports a

configurable error response code that is to be sent when requests are being throttled and cannot be sent to reselected NFs. The default code is 500. For more information on utilizing LCI for obtaining producer load, see [Load Control based on the Load Control Information Header](#).

Note

Currently, if load is not present at service level, it is not picked from the NF profile level.

Egress Congestion Control for Reported Load of NextHop SCP or SEPP

SCP protects the next-hop SCP or SEPP from congestion. SCP monitors the load reported by nexthop SCP or SEPP in the LCI header. When the load exceeds the threshold, congestion control steps are taken. Reselection or traffic throttling are utilized based on the request's priority.

Managing Egress Congestion Control Support at SCP

Enable

This feature is enabled automatically in SCP at the time of deployment.

Configure

You can configure this feature using the CNC Console or REST API.

- **Configure using CNC Console:** For information about SBI message priority and error profile configurations, see [Configuring SBI Message Priority and Error Profiles for Egress Congestion Control](#).
- **Configure using REST API:** For information about message priority discard threshold and error code configurations in the `nfServiceLoadBasedCongestionControl` parameter, see "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.48 Support for Model D Indirect 5G SBI Communication with Delegated Discovery

5G Service Based Interface (SBI) communication models are used to establish connections among NFs and NF services. These communication models facilitate consumer NFs to route

service requests to producer NFs either directly or indirectly through Service Communication Proxy (SCP). For more information about different communication models, such as Model A, Model B, Model C, and Model D, see 3GPP TS 23.501 version 16.6.0 Release 16.

Using the Model D Indirect 5G SBI Communication with Delegated Discovery feature, consumer NFs delegate the producer NF discovery procedure to SCP by adding discovery parameters to the service requests.

SCP performs NF discovery with NRF using the received discovery parameters. The NRF indicated in the `preferredNrfForOnDemandDiscovery` parameter is used for the discovery procedure, which specifies the NRF preferred by `scp-nrfproxy` for delegated discovery. When the indicated NRF is not available, SCP does alternate routing to the NRFSet, which has the `preferredNrfForOnDemandDiscovery` parameter.

When SCP receives service requests with NF discovery parameters by including "3gpp-Sbi-Discovery" headers for the target producer NF selection, then SCP:

- extracts "3gpp-Sbi-Discovery" headers from the ingress service requests and initiates the discovery procedure based on these headers. For more information about the "3gpp-Sbi-Discovery" header, see 3GPP TS 29.500 version 16.6.0.
- selects the producer NF instance from the discovery response based on priority and capacity.
- stores NF discovery responses using the cache-control directives from NRF in NF discovery response messages.
- removes all "3gpp-Sbi-Discovery" headers from the service requests and forwards the service requests to the selected target producer NF. In case of inter-SCP routing, SCP forwards all the "3gpp-Sbi-Discovery" headers to the next hop SCP.
- reselects with the use of the discovery headers and results from delegated discovery responses are used to do initial selection and reselection.

Note

SCP is not expected to receive a discovery response from NRF containing both LOCAL and FOREIGN NF profiles. All NF profiles in a discovery response should be either FOREIGN or LOCAL. FOREIGN NF profiles' locality is not in SCP's serving localities list, allowing inter-SCP routing. LOCAL NF profiles' locality is within the SCP's serving localities list, enabling direct routing to producer NFs.

Service Specific Discovery Request in Model D

The Model D discovery request that SCP sends to NRF has the `3gpp-sbi-discovery-service-names` header. The path URI of the ingress message is used to extract the service name, such as `nudm_uecm`. As a result, the rule creating takes less time since SCP just needs to parse a smaller NF profile. The NF profile returned by NRF contains the requested NF service-specific information only.

NF Selection based on Preferred Locality

A consumer NF selects the target producer NF closest to it by setting the preferred locality to the value of the locality of the producer NF. When the preferred locality query parameter is present in the NF discovery service request, NRF prefers NF profiles with a locality attribute that matches the preferred locality. NRF returns additional NFs in the response that does not match the preferred target NF location. NRF sets a lower priority for any additional NFs on the response that does not match the preferred target NF location than those matching the preferred target NF location.

SCP configures preferred locality query parameters based on the received "3gpp-Sbi-Discovery-preferred-locality" header in the service request. SCP assigns its own locality as a preferred-locality for NF discovery if the `assignPreferredLocality` parameter is enabled and the "3gpp-Sbi-Discovery-preferred-locality" header is absent in ingress service requests. SCP overrides the "3gpp-Sbi-Discovery-preferred-locality" header received in the service request and uses its own locality as preferred locality for NF discovery if the `overridePreferredLocality` parameter is enabled and the "3gpp-Sbi-Discovery-preferred-locality" header is present in ingress service requests. SCP controls the forwarding of assigned or overridden value of "3gpp-Sbi-Discovery-preferred-locality" headers to next hop SCP.

Model D Indirect 5G SBI Communication supports the following routing functionalities as described in [Support for Model C Indirect 5G SBI Communication](#) :

- Binding Headers
- Load Balancing and Alternate Routing
- Reverse Lookup

Load Balancing Support for Delegated Discovery

Users can change the preferred NRF instance ID or NRF Set ID for delegated discovery at runtime using the REST API. If only NRF `nfSetId` is configured, then SCP does load balancing for the matching NRFs selected by `nfSetId`. For more information, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Managing Model D Indirect 5G SBI Communication

Enable

You can enable the Model D feature by setting `modeld_routing` to `true`. For more information, see [Configuring SCP Features](#).

Note

You can enable this feature if SCP is deployed with Release 16.

Configure

You can configure this feature using Helm, REST API, and the CNC Console.

- **Configure using Helm:** For information about configuring the `scp-nrfproxy` microservice parameters, `nrfProxyService`, and `nrfProfiles.customInfo.preferredNrfForOnDemandDiscovery`, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

- **Configure using CNC Console:** For information about configuring this feature, see:
 - [Configuring SCP Features](#) to enable the feature and cache discovery responses.
 - [Configuring Global Options](#) to verify the **Forward Nf Discovery Headers** status.

- [Configuring Routing Options](#) to manage the "3gpp-Sbi-Discovery-preferred-locality" header.
- **Configure using REST API:** For information about the REST API configurations, see "Configuring System Options" and "Configuring Routing Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about metrics, see [Metrics](#).

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.48.1 Managing Delegated Discovery Response Caching Based on Discovery Query Parameters

In Model D, the responsibility of NF discovery has been delegated to the Service Communication Proxy (SCP). When Model D cache is enabled at SCP, SCP caches all the NF discovery responses received from NRF. These cached responses are then used for further Model D delegated discovery service requests, where applicable.

Currently, when caching is enabled at SCP, all NF discovery responses received from NRF are cached by SCP. The service request often contains query parameters that change frequently, such as subscriber IDs, for example, Subscription Permanent Identifier (SUPI), Global Permanent Subscriber Identity (GPSI), and so on. This dynamic nature of query parameters may prevent the reuse of cached responses at SCP. Since SCP maintains a defined cache size, frequent cache filling could lead to inefficient utilization of the discovery response cache.

With this feature enhancement, SCP can do selective caching of the discovery responses based on the user-configurable discovery query parameter list, which will be avoided or ignored for discovery response caching at SCP. Thus, the selective caching control helps the user reduce the risk of cache overflow. This caching mechanism helps to optimize the performance while reducing latency.

Managing Delegated Discovery Response Caching

Prerequisite

This feature will be enabled if Model D feature and caching in Model D are both enabled.

Enable

You can enable the Managing Delegated Discovery Response Caching Based on Query Parameters feature by setting `modeld_routing` to true and `Caching` is set to true to enable caching to store discovery responses. For more information, see [Support for Model D Indirect 5G SBI Communication with Delegated Discovery](#).

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see
 - [Get NF Discovery Response Cache Configuration Data](#)
 - [Configuring NF Delegated Discovery Response Cache](#)
- **Configure using REST API:** For information about configuring REST APIs, see the "Discovery Cache Response Configuration" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_worker_ondemand_discovery_response_cache_skipped_total`
- `ocscp_worker_ondemand_discovery_response_cache_added_total`
- `ocscp_worker_ondemand_discovery_response_cache_removed_total`
- `ocscp_nrfproxy_ondemand_discovery_response_cache_skipped_total`
- `ocscp_nrfproxy_ondemand_discovery_response_cache_added_total`
- `ocscp_nrfproxy_ondemand_discovery_response_cache_removed_total`

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.48.2 NF Discovery Response Cache Update Based on the Received Notifications

The current SCP Model D discovery response cache functionality helps reduce latency, network bandwidth usage, and overall load on the NRF. However, the refresh of these cache records depends on the validity time value received in the discovery response. A Notification update or Deregister event for an NF may cause records containing the same NF to become outdated. Without timely cache updates, SCP may rely on outdated information, potentially leading to incorrect or inefficient routing decisions.

The NF Discovery Response Cache Update enhancement allows SCP to automatically update its Model D discovery response cache or invalidate the relevant cache based on real-time notifications from the NRF whenever there are changes or updates to NF profile information. In the case of record invalidation, SCP will initiate a discovery request to the NRF upon receiving a new request with the same query parameters. This ensures that SCP always works with the most current data, preventing issues related to outdated cache entries.

The following benefits highlight how this feature enhances system performance:

- **Reduced Latency and Network Bandwidth:** By ensuring the discovery cache is always up-to-date, this feature minimizes the need for redundant discovery operations, resulting in faster communication responses.

- **Reduced NRF Discovery Traffic:** With the cache being frequently updated based on NRF notifications, unnecessary discovery requests to the NRF are minimized, leading to lower overall traffic.
- **Improved Processing Time at SCP:** Real-time updates to the discovery response cache prevent delays caused by outdated information, allowing for faster processing within SCP.
- **Prevent Improper SBI Routing:** This feature ensures that the correct and most current NF profile data is always used, avoiding errors in Service-Based Interface (SBI) routing decisions.

Attributes for Cache Refresh and Invalidation

The following table lists the NF profile parameters that trigger cache refresh and those that trigger cache invalidation:

Table 3-58 NF Profile Attributes for Cache Management

Attribute Name (as per 3GPP 29.510)	Impact on NF Profile and SCP Routing Consideration	Impact on NF Discovery Response and NRF Refresh
nfInstanceId	NA	NA
nfType	NA	NA
nfStatus	Yes	No
nfInstanceName	NA	NA
heartBeatTimer	NA	NA
plmnList	No	Yes
snpnList	No	Yes
sNssais	No	Yes
perPlmnSnssaiList	No	Yes
nsiList	No	Yes
fqdn	Yes	No If the discovery header, 3gpp-sbi-discovery-target-nf-fqdn, is present in the request, it will be invalidated.
interPlmnFqdn	Yes	No
ipv4Addresses	Yes	No
ipv6Addresses	Yes	No
allowedPlmns	No	Yes
allowedSnpns	No	Yes
allowedNfTypes	No	Yes
allowedNfDomains	No	Yes
allowedNssais	No	Yes
priority	No	Yes SCP must contact NRF to obtain the updated prioritized list of NFs.
capacity	Yes	No
load	Yes	No
loadTimeStamp	Yes	No
locality	No	Yes
udrInfo	No	Yes
udrInfoList	No	Yes
udmInfo	No	Yes

Table 3-58 (Cont.) NF Profile Attributes for Cache Management

Attribute Name (as per 3GPP 29.510)	Impact on NF Profile and SCP Routing Consideration	Impact on NF Discovery Response and NRF Refresh
udmInfoList	No	Yes
ausfInfo	No	Yes
ausfInfoList	No	Yes
amfInfo	No	Yes
amfInfoList	No	Yes
smfInfo	No	Yes
smfInfoList	No	Yes
upfInfo	No	Yes
upfInfoList	No	Yes
pcfInfo	No	Yes
pcfInfoList	No	Yes
bsfInfo	No	Yes
bsfInfoList	No	Yes
chfInfo	No	Yes
chfInfoList	No	Yes
nefInfo	No	Yes
nrfInfo	No	Yes
udsfInfo	No	Yes
udsfInfoList	No	Yes
nwdafInfo	No	Yes
pcscfInfoList	No	Yes
hssInfoList	No	Yes
customInfo	NA	NA
recoveryTime	NA	NA
nfServicePersistence	NA	NA
nfServices	Refer NF Service Table	Refer NF Service Table
nfServiceList	Refer NF Service Table	Refer NF Service Table
nfProfile Changes Support Ind	NA	NA
nfProfile Changes Ind	NA	NA
default Notification Subscriptions	No	Yes
lmfInfo	No	Yes
gmlcInfo	No	Yes
nfSetIdList	No	Yes
servingScope	No	Yes
lcHSupportInd	Yes	No
olcHSupportInd	Yes	No
NF Set Recovery Time List	NA	NA
Service Set Recovery Time List	NA	NA
scpDomains	Not supported in ocscf	Not supported in ocscf
scpInfo	Yes Update the inter-SCP routing rules	No

Table 3-59 NF Service Attributes for Cache Management

Attribute Name (as per 3GPP 29.510)	Impact on NF Profile and SCP Routing Consideration	Impact on NF Discovery Response and NRF Refresh
serviceInstanceId	NA	Yes
serviceName	NA	NA
versions	No	Yes
scheme	Yes	No
nfServiceStatus	Yes	No
fqdn	Yes	No If the discovery header, 3gpp-sbi-discovery-target-nf-fqdn, is present in the request, it will be invalidated.
interPlmnFqdn	Yes	No
ipEndpoints	Yes	No
apiPrefix	Yes	No
default Notification Subscriptions	No	Yes
allowedPlmns	No	Yes
allowedSnpsns	No	Yes
allowedNfTypes	No	Yes
allowedNfDomains	No	Yes
allowedNssais	No	Yes
allowed Operations Per NfType	No	Yes
allowed Operations Per NfInstance	No	Yes
priority	No	Yes
capacity	Yes	No
load	Yes	No
loadTimeStamp	Yes	No
recoveryTime	NA	NA
supportedFeatures	No	Yes
nfServiceSetIdList	No	Yes
sNssais	No	Yes
perPlmnSnssaiList	No	Yes
vendorId	NA	NA
supported Vendor Specific Features	NA	NA
oauth2Required	Yes	No

Note

SCP performs NRF refresh when any service is added or removed from a profile.

Managing NF Discovery Response Cache Update**Enable**

You can enable the NF Discovery Response Cache Update Based on the Received Notifications feature by setting both `modeld_routing` and `Caching` to true, and updating the `cacheUpdateMode` parameter. For more information, see [Configuring SCP Features](#).

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see the [Configuring Model D Indirect 5G SBI Communication feature](#) section.
- **Configure using REST API:** For information about configuring REST APIs, see the "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- `ocscp_nrfproxy_ondemand_discovery_cache_notif_local_refresh_total`
- `ocscp_nrfproxy_ondemand_discovery_cache_invalid_notif_nrf_refresh_total`
- `ocscp_worker_ondemand_discovery_cache_notif_local_refresh_total`
- `ocscp_worker_ondemand_discovery_cache_invalid_notif_nrf_refresh_total`
- `ocscp_nrfproxy_ondemand_discovery_cache_nrf_refreshed_status_total`
- `ocscp_worker_ondemand_discovery_cache_nrf_refreshed_status_total`

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.49 NF Discovery Enhancements

In SCP 25.2.100 and earlier releases, when using the Model D indirect 5G SBI communication model, consumer NFs delegated the NF discovery procedure to SCP by including discovery parameters in their service requests. SCP performed NF discovery with NRF using the available discovery parameters.

When communication between SCP and NRF was interrupted due to unavailability of NRF or connectivity issues, SCP was unable to process Model D delegated service requests.

From SCP 25.2.201, SCP enhances its NF discovery mechanism by providing configurations to enhance delegated discovery response by adding NFs based on reverse lookup on the set IDs of NFs present in the delegated discovery responses. It also supports load balancing and alternate routing by updating the priority and capacity of NFs.

SCP supports user-defined static configuration, including discovery criteria, applicable NF instances, NF sets, and NFs based on FQDN and IP addresses, to process NF discovery requests and create delegated discovery response locally.

By default, SCP routes the discovery request to the local NRF or you can configure NRF using the NF Discovery Mode REST API to route the NF discovery request.

NF Discovery Mode Selection Process

If `nf-discovery-enhancement` is disabled, NRF becomes the default discovery source. If `nf-discovery-enhancement` is enabled but no matching rule is found in the NF discovery mode REST API, NRF becomes the discovery source in those scenarios.

The `nfdiscovery-mode-cfg` REST API determines the source of NF discovery for Model D delegated discovery requests and Model C discovery requests in SCP using the `nf-discovery-enhancement` REST API. For more information about `nf-discovery-enhancement`, `nf-discovery-enhancement`, and `nfdiscovery-mode-cfg`, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

The following matching keys are compared with the NF discovery headers to find the source of NF discovery:

- `targetNfTypes`
- `requesterNfTypes`
- `serviceNames`
- `targetPlmnList`
- `requesterPlmnList`
- `apiRootHdrPresnt`
- `groupIdList`

The above mentioned parameters are defined in the "Configuring NF Discovery Mode" section of *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

SCP uses the `NfDiscoverySource` parameter to generate the discovery response using the following options:

- **NRF:** Generates the discovery response by querying NRF.
- **SCP:** Generates the discovery response locally based on the NF static discovery REST API configuration.
- **NRF_FOLLOWED_BY_SCP:** Generates the discovery response by querying NRF. If discovery fails and the error codes are in the configured error list of `discoveryModeFallbackCriteria`, it falls back to SCP.
- **SCP_FOLLOWED_BY_NRF:** Generates the discovery response locally. If no matching rule is found and `ruleNotFound` is configured in `discoveryModeFallbackCriteria`, it falls back to NRF.

The NF discovery response modes are as follows:

NRF Mode

In this mode, NF discovery is done by NRF using the following steps:

1. SCP receives a Model D or Model C NF discovery request.
2. SCP finds the NF discovery mode as NRF.
3. NRF starts the NF discovery process.

SCP Mode

In this mode, SCP performs NF discovery by bypassing NRF using the following steps:

1. SCP receives a Model D or Model C NF discovery request.
2. SCP selects a discovery mode using the `nfdiscovery-mode-cfg` REST API which has NF discovery modes configured as SCP.
3. SCP selects a static discovery rule using the `nfdiscovery-cfg` REST API and generates a discovery response based on the selected rules.

NRF_FOLLOWED_BY_SCP Mode

In this mode, if NRF fails to discover the NF, it falls back to SCP, which performs NF discovery using the following steps:

1. SCP receives a Model D or Model C NF discovery request.
2. SCP selects a discovery mode using the `nfdiscovery-mode-cfg` REST API which has NF discovery modes configured as `NRF_FOLLOWED_BY_SCP`.
3. NRF returns error response, for example, 400. The 4xx error code is configured as a fallback criteria at NF discovery mode configuration. The discovery fallback happens at SCP.
4. SCP selects a static discovery rule based on the `nfdiscovery-cfg` REST API and generates a discovery response based on the selected rules.

In case the NF discovery at NRF fails and the fallback does not happen at SCP, then:

1. SCP receives a Model D or Model C NF discovery request.
2. SCP selects a discovery rule using the `nfdiscovery-mode-cfg` REST API which has NF discovery modes configured as `NRF_FOLLOWED_BY_SCP`.
3. NRF returns error response, for example, 400. The 4XX error code is not configured as fallback criteria at NF discovery mode configuration.
4. SCP returns error response to the consumer NF.

SCP_FOLLOWED_BY_NRF Mode

In this mode, SCP generates the discovery response from locally learned NFs using the following steps:

1. SCP receives a Model D or Model C NF discovery request.
2. SCP selects a discovery mode using the `nfdiscovery-mode-cfg` REST API which has NF discovery modes configured as `SCP_FOLLOWED_BY_NRF`.
3. SCP selects a static discovery rule using the `nfdiscovery-cfg` REST API and generates a discovery response based on the selected rules.

In case the discovery failed at SCP and the fallback happened at NRF, then:

1. SCP receives a Model D or Model C NF discovery request.
2. SCP selects a discovery mode using the `nfdiscovery-mode-cfg` REST API which has NF discovery modes configured as `SCP_FOLLOWED_BY_NRF`.
3. Discovery failed at SCP. SCP generates the `rule-not-found` error and the `ruleNotFound` parameter is configured in `nfdiscovery-mode-cfg`.
4. NRF performs the NF discovery.

In case the NF discovery failed at SCP and fallback did not happen, then:

1. SCP receives a Model D or Model C NF discovery request.
2. SCP selects a discovery mode using the `nfdiscovery-mode-cfg` REST API which has NF discovery modes configured as `SCP_FOLLOWED_BY_NRF`.


- Discovery failed at SCP. SCP generates rule-not-found error and the ruleNotFound parameter is not configured in nfdiscovery-mode-cfg.
- NRF does not perform the discovery and SCP returns an error response to the consumer NF.

Routing Behavior Based on Model C and Model D Discovery Requests

This section provides information about routing behavior for Model C and Model D requests when the discovery source is NRF.

The following call flow represents how SCP processes a Model C discovery request from a consumer NF when the NF discovery mode is NRF:


Figure 3-14 Processing a Model C Discovery Request When the Discovery Mode is NRF

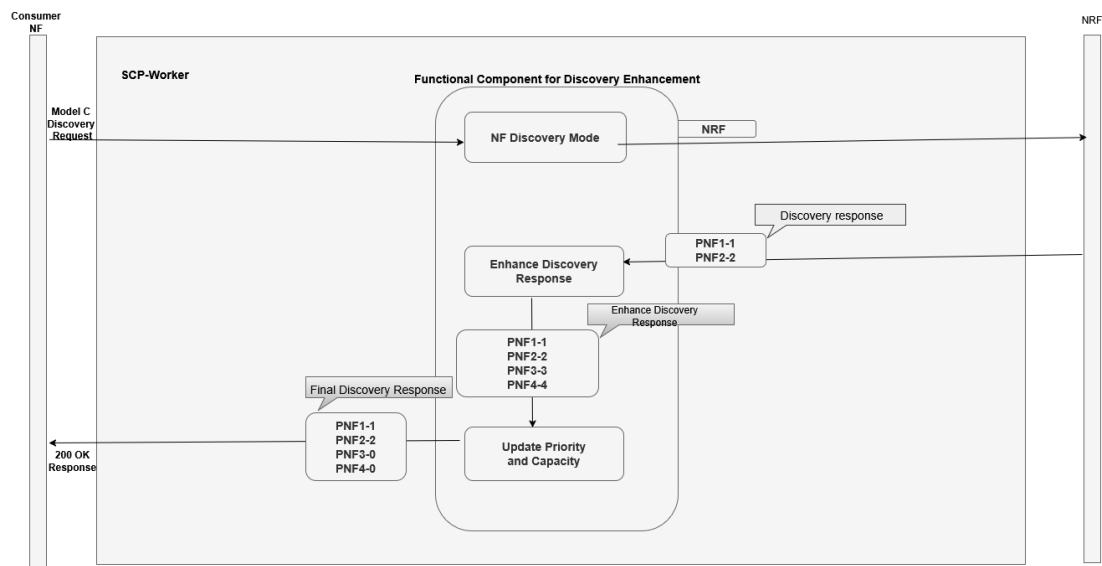

In the above mentioned call flow, the following routing behavior is observed when the NF discovery source is NRF for a Model C request:

- SCP receives a Model C discovery request and if the NF discovery mode is set to NRF, NRF returns producer PNF1 and producer PNF2 whose priorities and capacities are set to 1 and 2 respectively. Where, PNF is Producer Network Function.
- SCP enhances its discovery response by adding two new producer NFs, PNF3 and PNF4, with their priorities and capacities set to 3 and 4 respectively.
- SCP updates the priority and capacity of these newly added producer NFs to 0.
- SCP returns enhanced discovery response to the consumer NF by including PNF1, PNF2, PNF3, and PNF4.

The following call flow represents how SCP processes a Model D delegated discovery request from a consumer NF when the NF discovery mode is NRF:

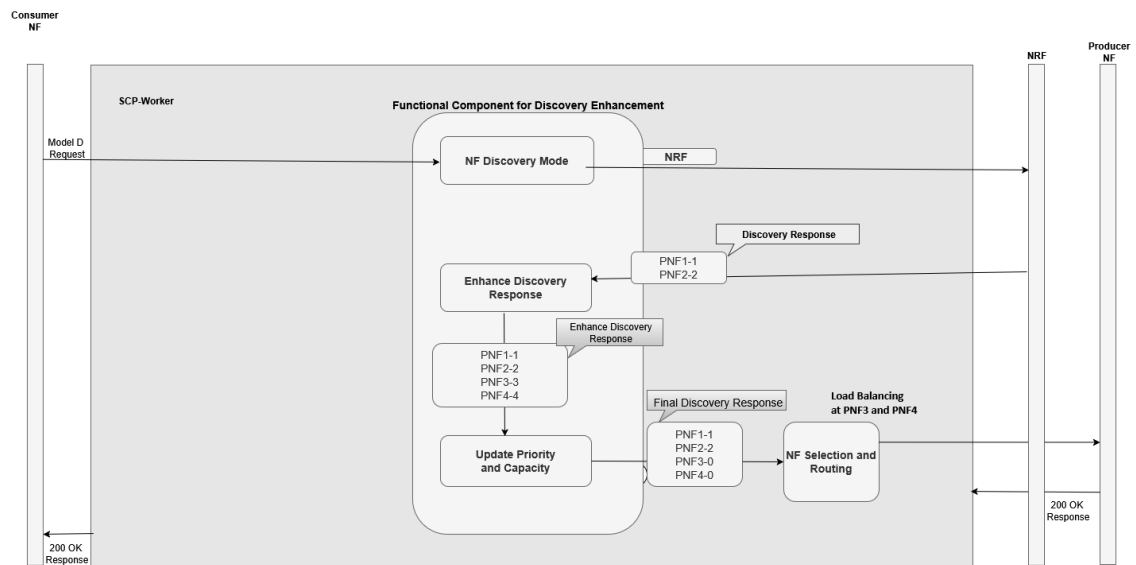Figure 3-15 Processing a Model D Discovery Request When the Discovery Mode is NRF

In the above mentioned call flow, the following routing behavior is observed when the NF discovery source is NRF for a Model D request:

1. SCP receives a Model D discovery request and if the NF discovery mode is set to NRF, NRF returns producer PNF1 and producer PNF2 whose priorities and capacities are set to 1 and 2 respectively. Where, PNF is Producer Network Function.
2. SCP enhances its discovery response by adding two new producer NFs, PNF3 and PNF4, with their priorities and capacities set to 3 and 4 respectively.
3. SCP updates the priority and capacity of these newly added producer NFs to 0.
4. SCP selects PNF3 and PNF4 for routing.

Application of NF Discovery Enhancement

The following table describes whether `nf_discovery_enhancement` is applicable based on the availability of headers in requests:

Table 3-60 Application of NF Discovery Enhancement

3gpp-Sbi-Discovery-*	3gpp-Sbi-Target-apiRoot	3gpp-Sbi-Routing-Binding	Is <code>nf_discovery_enhancement</code> applicable?
No	No	No	No
No	No	Yes	No
No	Yes	No	No
No	Yes	Yes	No
Yes	No	No	Yes
Yes	No	Yes	No
Yes	Yes	No	Yes
Yes	Yes	Yes	No
Model C Discovery Request			Yes

The following table describes the impact of `enhanceNfDiscoveryRspCfg` and its attributes on the NF discovery responses and routing behavior:

Note

This configuration is applicable only on the discovery response received from NRF.

Table 3-61 Impact of `enhanceNfDiscoveryRspCfg`

enhanceNfDiscoveryRspCfg				NF Discovery Response Enhancement	Routing Behavior
enabled	includeAllNfsOfNfSet	allNfPriorityCapacityInfo	addedNfPriorityCapacityInfo		
false	NA	NA	Not applicable	No impact	No impact
true	false	null	Not applicable (cannot be configured)	No impact	No impact
true	false	Configured	Not applicable (cannot be configured)	Priority or capacity are updated of all NFs received in the delegated discovery response.	Routing happens based on the updated priority and capacity.
true	true	Configured	null	NF discovery response is enhanced by adding more NFs by reverse lookup based on the set ID. Final list may contain both foreign and local producer NFs. Priority or capacity is updated of all NFs received in the delegated discovery response. It includes NFs that are added by reverse lookup based on set IDs.	First Routing: If the highest priority producer NF is local, direct routing happens. If the highest priority producer NF is foreign inter-scp routing happens. Alternate routing: If the first routing attempt happened on the local producer NF failed, then direct alternate routing happens on other producer NFs (can be local or foreign). If inter-scp routing happen in the first routing, as per current SCP behavior, alternate routing is done by producer side SCP.
true	true	null	configured	NF discovery response is enhanced by adding more NFs by reverse look up based on the set ID. The final list may contain both foreign and local producer NFs. Priority or capacity of added NFs is updated (NFs added by reverse lookup based on set IDs).	First Routing: If the highest priority producer NF is local, direct routing happens. If the highest priority producer NF is foreign, inter-scp routing happens. Alternate routing: If the first routing attempt on the local producer NF has failed, then direct alternate routing happens on other producer NFs (can be local or foreign). If inter-scp routing happens in the first routing, as per current SCP behavior, alternate routing is done by producer side SCP.

Table 3-61 (Cont.) Impact of enhanceNfDiscoveryRspCfg

enhanceNfDiscoveryRspCfg				NF Discovery Response Enhancement	Routing Behavior
enabled	includeAllNfSets	allNfPriorityCapacityInfo	addedNfPriorityCapacityInfo		
true	true	null	null	NF discovery response is enhanced by adding more NFs by reverse look up based on the set IDs. The final list may contain both foreign and local producer NFs. Priority or capacity for any NF is not updated.	First Routing: If the highest priority producer NF is local, direct routing happens If the highest priority producer NF is foreign, inter-scp routing happens. Alternate routing: If the first routing attempt on local producer NF has failed, then direct alternate routing happens on other producer NFs (can be local or foreign). If inter-scp routing happens in the first routing, as per current SCP behavior, alternate routing is done by producer side SCP.
true	true	Configured	Configured	This configuration is not possible using the REST APIs.	-

The following table describes routing behavior based on nf_discovery_enhancement and nf_selection_enhancement REST API configurations for different headers present in the incoming request:

Table 3-62 Routing Behavior for Incoming Request Headers

Incoming Request Headers	EnhancedConsumerNFSelectionInfo	enhanceNfDiscoveryRspCfg	Consumer NF Selection	Consumer NF Selection After Enhancement	Routing Behavior
When Consumer NF Selection Mode is CONSUMER_NF_SELECTION					
target-api-root header = UDM1 3gpp-sbi-discovery-target-nf-type = UDM 3gpp-sbi-discovery-requester-nf-type = AMF	- enabled: NA - includeAllNfSets: NA	- enabled: false - includeAllNfSetsOfNfSet: false	target-api-root header = UDM1	NA	The first routing starts on target-api-root header = UDM1. If the first routing fails, then SCP performs delegated discovery. When the discovery is successful, the routing is done on the received delegated discovery response.

Table 3-62 (Cont.) Routing Behavior for Incoming Request Headers

Incoming Request Headers	EnhancedConsumerNFSelectionInfo	enhanceNfDiscoveryRspCfg	Consumer NF Selection	Consumer NF Selection After Enhancement	Routing Behavior
	- enabled: NA - includeAllNfs: NA	- enabled: true - includeAllNfsOfNfSet: true	target-api-root header = UDM1	NA	The first routing starts on target-api-root header = UDM1. If the first routing fails, then SCP performs delegated discovery. When the discovery is successful, the discovery response is enhanced to add more NFs in the discovery response using the set-id based reverse lookup. It updates priority or capacity if any of the <code>allNfPriorityCapacityInfo</code> or <code>addedNfPriorityCapacityInfo</code> parameter is configured in <code>EnhancedConsumerNFSelectionInfo</code>. The routing is done on the enhanced delegated discovery response.
When Consumer NF Selection Mode is ENHANCED_CONSUMER_NF_SELECTION					
target-api-root header = UDM1 3gpp-sbi-discovery-target-nf-type = UDM 3gpp-sbi-discovery-requester-nf-type = AMF	- enabled: true - includeAllNfs: false	- enabled: false - includeAllNfsOfNfSet: false	target-api-root header = UDM1	UDM1	SCP performs delegated discovery first from configured discovery source (SCP or NRF). It adds UDM1 in the delegated discovery response if absent. It updates priority or capacity if any of the <code>allNfPriorityCapacityInfo</code> or <code>addedNfPriorityCapacityInfo</code> parameter is configured in <code>EnhancedConsumerNFSelectionInfo</code>. SCP performs first routing based on the priority and capacity.

Table 3-62 (Cont.) Routing Behavior for Incoming Request Headers

Incoming Request Headers	EnhancedConsumerNFSelectionInfo	enhanceNfDiscoveryRspCfg	Consumer NF Selection	Consumer NF Selection After Enhancement	Routing Behavior
	- enabled: true - includeAllNfs: true	- enabled: false - includeAllNfsOfNfSet: false	target-api-root header = UDM1	UDM1 UDM2 UDM3	SCP performs delegated discovery first from configured discovery source (SCP or NRF). It adds UDM1 in the delegated discovery response if absent. It does reverse lookup on the set ID of target-api-root profile and adds those profiles in the discovery response. It updates priority or capacity if any of the <code>allNfPriorityCapacityInfo</code> or <code>addedNfPriorityCapacityInfo</code> parameter is configured in <code>EnhancedConsumerNFSelectionInfo</code>. SCP performs the first routing based on the priority and capacity.
	- enabled: true - includeAllNfs: true	- enabled: true - includeAllNfsOfNfSet: false	target-api-root header = UDM1	UDM1 UDM2 UDM3	SCP performs delegated discovery first from configured discovery source (SCP or NRF). It enhances discovery response by updating the priority or capacity if any of the <code>allNfPriorityCapacityInfo</code> or <code>addedNfPriorityCapacityInfo</code> is configured in <code>enhanceNfDiscoveryRspCfg</code>. It adds UDM1 in the delegated discovery response if absent. It performs reverse lookup on the set ID of target-api-root profile and adds those profiles in the discovery response. It updates priority or capacity if any of the <code>allNfPriorityCapacityInfo</code> or <code>addedNfPriorityCapacityInfo</code> parameter is configured in <code>EnhancedConsumerNFSelectionInfo</code>. SCP performs first routing based on the priority and capacity.

Table 3-62 (Cont.) Routing Behavior for Incoming Request Headers

Incoming Request Headers	EnhancedConsumerNFSelectionInfo	enhanceNfDiscoveryRspCfg	Consumer NF Selection	Consumer NF Selection After Enhancement	Routing Behavior
	- enabled: true - includeAllNfs: true	- enabled: true - includeAllNfsOfNfSet: true	target-api-root header = UDM1	UDM1 UDM2 UDM3	SCP performs delegated discovery first from configured discovery source (SCP or NRF). It enhances discovery response to add more NFs is the discovery response (by set-id based reverse lookup of the profiles received in delegated discovery response). It enhances discovery response by updating the priority or capacity if any of the allNfPriorityCapacityInfo or addedNfPriorityCapacityInfo is configured in enhanceNfDiscoveryRspCfg. It adds UDM1 in the delegated discovery response if absent. It performs reverse lookup on the set ID of target-api-root profile and adds those profiles in the discovery response. It updates priority or capacity if any of the allNfPriorityCapacityInfo or addedNfPriorityCapacityInfo parameter is configured in EnhancedConsumerNFSelectionInfo. SCP performs first routing based on the priority and capacity.

Managing NF Discovery Enhancements

Enable

By default, this feature is disabled at the time of SCP deployment. To enable this feature, set the `NF_discovery_enhancement` parameter to true.

Sample configuration:

```
{
  "featureName": "nf_discovery_enhancement",
  "enabled": true,
  "featureSpecificConfig": {
    "nfStatusForLocalDiscRespCreation": [
      "REGISTERED"
    ]
  }
},
```

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see the following sections:
 - [Configuring NF Discovery Enhancement](#)
 - [Configuring IE Registry](#)
- **Configure using REST APIs:** For information about configuring REST APIs, see the following sections in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*:
 - Configuring SCP Features
 - Configuring IE Registry
 - Configuring IE Binding Info
 - Configuring NF Discovery Mode
 - Configuring Static NF Discovery

Observe

The following metrics are used for this feature:

- `ocscp_worker_nf_discovery_mode_total`
- `ocscp_worker_local_nf_discovery_resolution_successful_total`
- `ocscp_worker_local_nf_discovery_successful_rule_match_successful_total`
- `ocscp_worker_local_nf_discovery_successful_rule_match_unsuccessful_total`
- `ocscp_worker_local_nf_discovery_resolution_unsuccessful_total`
- `ocscp_worker_nf_discovery_response_enhanced_total`
- `ocscp_worker_2xx_empty_nf_array_rx_total`
- `ocscp_worker_nf_discovery_success_response_processing_mode_total`
- `ocscp_worker_nf_discovery_request_processing_status_total`
- `ocscp_worker_local_discovery_processing_time_total`
- `ocscp_worker_nf_profile_sync_status_total`
- `ocscp_worker_nf_profile_sync_failure_status`
- `ocscp_metric_notif_to_worker_data_fetching_time_total`

For more information about metrics, see [Metrics](#).

The following alert is used for this feature:

- [SCPWorkerNFProfileSyncFailure](#)

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.

2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.50 NF Selection Enhancements

In SCP 25.2.100 and earlier releases, SCP supported SBI service requests and notifications that included the 3gpp-sbi-target-api-root and routing binding headers. SCP made the first routing attempt using the 3gpp-sbi-target-api-root header. If this attempt failed, SCP routed the request to the producer NF received in the routing binding header. SCP routed requests to producer NFs based on the priority and capacity published by the NFs. SCP could not perform load balancing for the first routing attempt for service requests that carried the 3gpp-sbi-target-api-root header.

From SCP 25.2.201, SCP enhances its NF selection using NF selection mode configuration that modifies the selection of NFs by consumer NFs for routing. When this feature is enabled, SCP can override the behavior of alternate routing and load balancing. SCP can perform load balancing between the NFs in an NF set for initial service requests.

Processing SBI Service Request

The following NF selection modes can be used:

- **CONSUMER_NF_SELECTION:** This is the default NF selection mode. If no rules match an incoming SBI request, this mode is selected for the request. In this mode, SCP performs the functionalists from SCP 25.2.100, with no impact on routing.
- **ENHANCED_CONSUMER_NF_SELECTION:** This mode provides the capabilities of the NF Selection enhancements. Using this mode, you can override the consumer NF selection as follows:
 - If the 3gpp-target-api-root header is present in the request, the first routing attempt might not be to the producer NF identified by that header. Instead, SCP first routes the request to another NF in the same NF set based on priority and capacity.
 - You can configure priority and capacity based on locality information. In this case, SCP can use the configured priority or capacity instead of the published priority or capacity.
 - You can achieve load balancing across all producer NFs in a set by configuring equal priority and capacity.

Application of NF Selection Enhancement

The following table describes whether `nf_selection_enhancement` is applicable based on the availability of headers in requests:

Table 3-63 Application of NF Selection Enhancement

3gpp-Sbi-Discovery-*	3gpp-Sbi-Target-apiRoot	3gpp-Sbi-Routing-Binding	Is <code>nf_selection_enhancement</code> applicable?
No	No	No	No
No	No	Yes	Yes
No	Yes	No	Yes
No	Yes	Yes	Yes
Yes	No	No	No
Yes	No	Yes	Yes
Yes	Yes	No	Yes

Table 3-63 (Cont.) Application of NF Selection Enhancement

3gpp-Sbi-Discovery-*	3gpp-Sbi-Target-apiRoot	3gpp-Sbi-Routing-Binding	Is nf_selection_enhanceme nt applicable?
Yes	Yes	Yes	Yes
Model C Discovery Request			No

The following table describes the impact of EnhancedConsumerNFSelectionInfo and its attributes on the NF selection:

Table 3-64 Impact of EnhancedConsumerNFSelectionInfo

EnhancedConsumerNFSelectionInfo				NF Selection Enhancement	Routing Behavior
enabled	includeAllNfs	allNfPriorityCapacityInfo	addedNfPriorityCapacityInfo		
false	NA	NA	Not applicable	No impact	No impact
true	false	null	null	No impact	No impact
true	false	configured	null	SCP will find producers as per current behavior. Priority/Capacity will be updated of all NFs selected for routing	No impact
true	false	null	configured	SCP will find producers as per current behavior. Priority/Capacity will be updated of added NFs selected for routing	No impact
true	false	configured	configured	Configuration is not allowed.	-
true	true	configured	configured	Configuration is not allowed.	-
true	true	configured	null	SCP finds all the producers from local NF pool and foreign NF pool. The final list of producer NFs (selected for routing) can have both local and foreign producers. Priority or capacity will be updated of all NFs selected for routing.	First Routing: If highest priority producer is local, then direct routing will happen. If highest priority producer is foreign, then inter-scp routing will happen. Alternate routing: If first routing attempt happened on local producer NF failed, then direct alternate routing will happen on other producer NFs (can be local or foreign). If inter-scp routing happen in first routing, then as per current SCP behavior, alternate routing will be done by producer side SCP.

Table 3-64 (Cont.) Impact of EnhancedConsumerNFSelectionInfo

EnhancedConsumerNFSelectionInfo				NF Selection Enhancement	Routing Behavior
enabled	includeAllNFs	allNfPriorityCapacityInfo	addedNfPriorityCapacityInfo		
true	true	null	configured	SCP will find all the producers from local NF pool and foreign NF pool. The final list of producers (selected for routing) can have both local and foreign producers. Priority/Capacity will be updated of only added NFs	First Routing: If highest priority producer is local, then direct routing will happen If highest priority producer is foreign, then inter-scp routing will happen. Alternate routing: If first routing attempt happened on local producer NF failed, then direct alternate routing will happen on other PNFs (can be local or foreign). If inter-scp routing happen in first routing, then as per current SCP behavior, alternate routing will be taken care by producer side SCP
true	true	null	null	SCP will find all the producers from local NF pool and foreign NF pool. The final list of producers (selected for routing) can have both local and foreign producers.	First Routing: If highest priority producer is local, then direct routing will happen If highest priority producer is foreign, then inter-scp routing will happen. Alternate routing: If first routing attempt happened on local producer NF failed, then direct alternate will happen on other producer NFs (can be local or foreign). If inter-scp routing happen in first routing, then as per current SCP behavior, alternate routing will be taken care by producer side SCP.

Managing NF Selection Enhancements

Enable

By default, this feature is disabled at the time of SCP deployment. To enable this feature, set the `nf_selection_enhancement` parameter to `true`.

Sample configuration:

```
{
  "featureName": "nf_selection_enhancement",
  "enabled": true,
  "createdTimestamp": "2025-10-30 08:27:48.0",
  "updatedTimestamp": "2025-10-30 08:27:48.0"
}
```

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see the following sections:
 - [Configuring NF Selection Enhancements](#)
- **Configure using REST APIs:** For information about configuring REST APIs, see the following sections in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*:
 - Configuring SCP Features
 - Configuring NF Selection Mode

Observe

The following metrics are used for this feature:

- `ocscp_worker_nf_selection_mode_header_match_conflict_total`
- `ocscp_worker_service_req_routing_information_absent_total`
- `ocscp_worker_notification_req_routing_information_absent_total`
- `ocscp_worker_rx_req_nf_selection_mode_total`
- `ocscp_worker_req_priority_capacity_enhanced_total`
- `ocscp_worker_nrf_routing_info_absent_route_success_total`

For more information about metrics, see [Metrics](#).

The following alerts are used for this feature:

- [ScpWorkerServiceRequestRoutingInfoAbsent](#)
- [ScpWorkerNotificationRequestRoutingInfoAbsent](#)
- [SCPWorkerNFSelectionHeaderMatchListDuplicates](#)

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.51 Topology Source Information Enhancements

In SCP 25.2.100 and earlier releases, SCP used the Topology Source Information REST API to learn 5G topology either from NRF or from local static configuration.

From SCP 25.2.201, SCP enhances its Topology Source Information REST API to learn NF profiles from both NRF and local configuration for any NF type at the same time. This REST API configuration enables SCP to discover and learn 5G topology and create routing rules. It allows SCP to learn NF profiles from NRF, local configuration, or both simultaneously by using the `NRF_AND_LOCAL` topology source type.

If the same instanceId is learned from both sources, SCP resolves conflicts based on the preferredTopologySource configuration.

This topology source operates in either AUTO (AUTONOMOUS) or USER mode, which determines SCP's behavior when using locally sourced topology information. The USER mode is the default and does not create any local copy of NRF-learned profiles. In the AUTO mode, SCP creates an SCP-owned copy of NRF profiles, which can be used for routing if NRF profiles become unavailable due to deregistration. When an NRF learned profile is deregistered, SCP-owned copy is used for routing unless the localNfTopologyRetentionPeriod REST API parameter expires. Only SCP-owned local copies are removed after localNfTopologyRetentionPeriod expires.

If any update is made to an SCP-owned profile using the NF Profile REST API, ownership of that profile is reassigned from SCP to USER. Only USER can remove or modify that NF profile.

Managing Topology Source Information Enhancements

Enable

By default, the topology source is set to NRF for all NF types.

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see the following sections:
 - [Configuring Topology Source Info](#)
 - [Configuring NF Profile](#)
- **Configure using REST APIs:** For information about configuring REST APIs, see the following sections in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*:
 - "Configuring Topology Source Info "
 - "Configuring NF Profile"

Observe

The following metrics are used for this feature:

- ocscp_notification_auto_retained_profile_delete_total
- ocscp_notification_tsi_change_profile_reprocessed_total
- ocscp_notification_auto_profile_total
- ocscp_notification_nf_profile_processing_failure_total
- ocscp_notification_nf_profiles_count
- ocscp_topologysource_toggle_total
- ocscp_notification_duplicate_foreign_location

For more information about metrics, see [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.52 5G SBI Roaming

This section provides information about SBI roaming traffic and how to:

- process 5G SBI roaming signaling traffic, including roaming ingress traffic to the local operator's network and egress traffic to a remote operator's network.
- intercept ingress roaming traffic from the local SEPP and egress roaming traffic from the SCP using a custom roaming proxy.

Note


To determine whether a request is inter-PLMN, intra-PLMN, or local, SCP must know its own PLMNs to handle roaming traffic. Therefore, the SCP profile must include the PLMN list. The NRF PLMN must be added to the SCP profile if it needs to be treated as a local PLMN by SCP.

3.52.1 SEPP Support for 5G SBI Roaming

3GPP specifies Local Breakout (LBO) and Home Routing (HR) roaming architectures. SCP can be used for indirect communications such as Model C or Model D, between NFs within Visited Public Land Mobile Network (VPLMN) or Home Public Land Mobile Network (HPLMN) or within both VPLMN and HPLMN.

The following image depicts the 5G system roaming architecture in the case of a home routed scenario with service-based interfaces within the Control Plane. For more information, see 3GPP TS 23.501 v16.6.0.

Figure 3-16 Local and Remote Routing

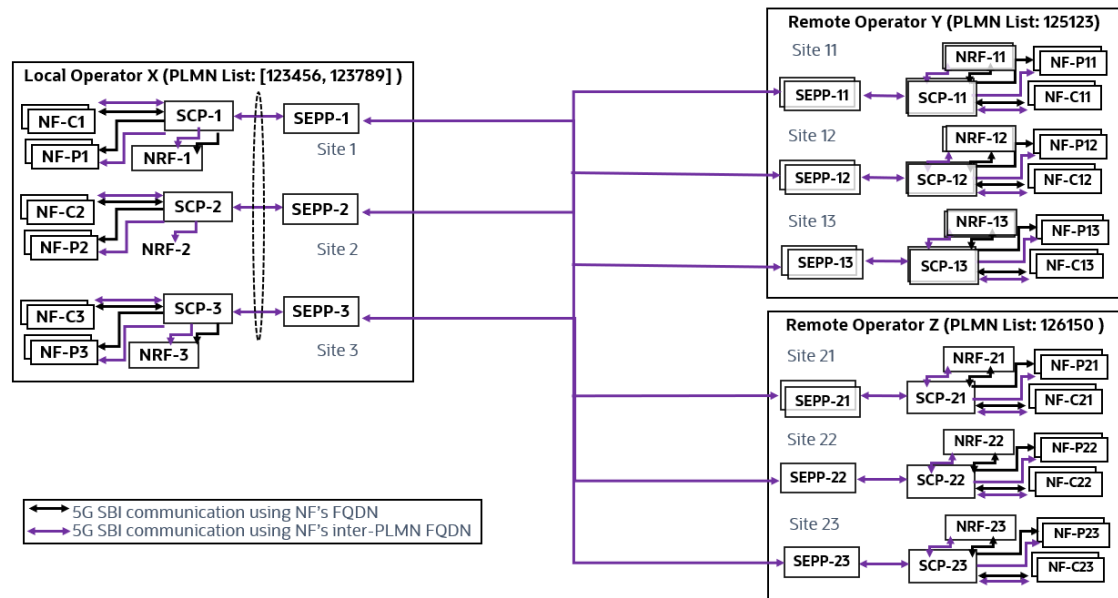

Local PLMN consumer NFs can be V-SMF, V-AMF, or V-PCF, and so on. Remote PLMN producer NFs can be H-SMF, H-UDM, or H-PCF, and so on.

This feature enables 5G SBI indirect communication for 5G SBI roaming signaling traffic, which includes roaming ingress traffic to local operator's network and egress traffic to remote operator's network.

The PLMN network ID for a mobile network identifies the roaming location uniquely. The ID contains Mobile Country Code (MCC) and Mobile Network Code (MNC) to identify a mobile network operator.

If an NF wants to be discovered by other NFs in a different PLMN, it registers inter PLMN FQDN in NRF. The format of inter PLMN FQDN is as follows:

<labels separated by dots>.5gc.mnc<MNC>.mcc<MCC>.3gppnetwork.org

Example of of Inter PLMN FQDN UDM belonging to PLMN MNC 12 and MCC 345:

udm.5gc.mnc012.mcc345.3gppnetwork.org

Note

Telescopic FQDN is not supported in this release.

Intra-PLMN (non-roaming) traffic is routed based on 5G NF topology determined from NRF using FQDN (local) present in NFs. 5G SBI roaming traffic received from SEPP, that is, ingress to local operator network site and with inter-PLMN or self constructed FQDN, is routed using inter-PLMN FQDN present in NFs.

If SCP receives a "3gpp-Sbi-Target-apiRoot" HTTP header in the ingress service request, it determines the target PLMN from the inter PLMN FQDN specified in this header. If the "3gpp-Sbi-Target-apiRoot" HTTP header is not present, SCP performs delegated discovery for NF selection based on the received "3gpp-Sbi-Discovery" headers.

To support the 5G SBI roaming subscriber inter-PLMN traffic routing for different remote PLMNs, SCP identifies whether the ingress 5G SBI service request is for local PLMN IDs or remote PLMN IDs. To differentiate between intra-PLMN and inter-PLMN service requests, SCP uses local supported PLMN IDs.

For a network, local supported PLMN IDs include SCP supported PLMN IDs. Other than locally supported PLMN IDs, all PLMN IDs are considered as remote PLMN IDs by SCP. A network consists of multiple PLMN IDs, and network deployment is based on PLMN IDs.

SCP determines the SEPP topology from NRF or locally configured SEPP profile at SCP. SCP selects a SEPP instance based on PLMN serving the target NF. SCP performs load balancing and alternate routing between SEPP instances based on priority and capacity available in the SEPP profile.

To use InterPLMN routing with Oracle NRF, you must enable the `scp_user_agent_info` REST API parameter to add the "User-Agent" header in the format starting with the keyword "SCP-" so that SCP originated messages towards NRF include the "User-Agent" header required by Oracle NRF.

Managing SEPP Support for 5G SBI Roaming

Enable

You can enable this feature by setting `interplmn_routing` to true. For more information, see [Configuring SCP Features](#).

Configure

You can configure this feature using Helm, REST API, and the CNC Console.

- **Configure using Helm:** For information about Helm configurations, see *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

Note

You can configure the required Helm parameters for this feature if you have performed a fresh installation of SCP or upgraded SCP within the same release version, for example, 1.15.1 to 1.15.1.

- **Configure using CNC Console:** For information about configuring NF instance IDs, see [Configuring SEPP Inter PLMN Routing](#).
- **Configure using REST API:** For information about the REST API configurations, see "Configuring SCP Features" and "Configuring SEPP InterPlmn Info" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.52.2 Support for Custom Roaming Proxy

The Public Land Mobile Network (PLMN) ID for a mobile network identifies the roaming location uniquely. This ID contains Mobile Country Code (MCC) and Mobile Network Code (MNC) to identify a mobile network operator.

3GPP specifies Local Breakout (LBO) and Home Routing (HR) roaming architectures. SCP can be used for indirect communications such as Model C or Model D, between NFs within Visited Public Land Mobile Network (VPLMN) or Home Public Land Mobile Network (HPLMN) or both. For more information about roaming 5G system architecture, see 3GPP TS 23.501 v16.6.0.

In SCP 25.2.100 and earlier releases, 5G SBI indirect communication was enabled for 5G SBI roaming signaling traffic, which included roaming ingress traffic to local operators' network and egress traffic to remote operators' network. And all these traffic to local and remote network used to be routed through SEPP. SCP used to determine the SEPP topology from NRF and locally configured SEPP profile at SCP, and then select a SEPP instance based on PLMN serving the target NF. SCP used to perform load balancing and alternate routing between SEPP instances based on priority and capacity available in the SEPP profile.


From SCP 25.2.201, SCP supports the Custom Roaming Proxy feature that intercepts ingress roaming traffic from the local SEPP before forwarding it to SCP, and intercepts egress roaming traffic from SCP before forwarding it to the local SEPP in the local PLMN. You can define a Custom Roaming Proxy in a 5G network.

Custom Roaming Proxy inspects and controls roaming call flows between the visited 5G network and the home 5G network. It assesses the content of the messages both received from and forwarded to SCP.

Using this feature, SCP can:

- process custom proxy NF profiles configured locally to obtain routing details.
- identify and route incoming roaming traffic to local producer NFs.
- detect and control egress roaming requests and determining roaming proxy NF types.
- select suitable Custom Roaming Proxy NF instances for routing.
- manage routing to custom proxies, including error handling.

The following image depicts how Custom Roaming Proxy (CRP) intercepts ingress and egress traffic in a local PLMN:

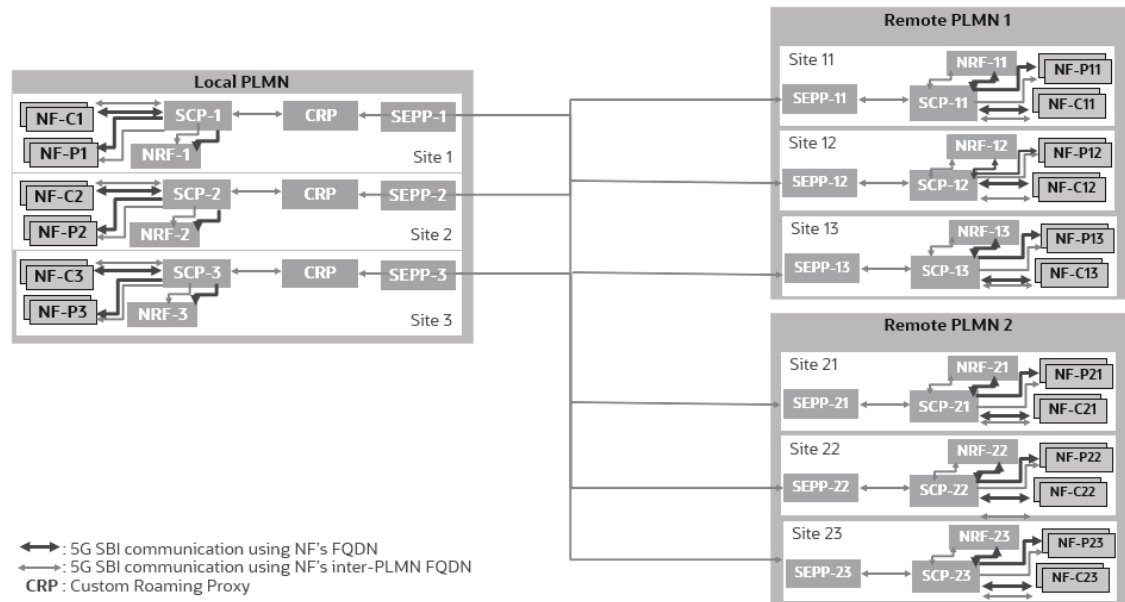Figure 3-17 Custom Roaming Proxy

Obtain Routing Details

Roaming proxy NFs only substitute ingress and egress roaming traffic and do not host NF services. For standard roaming proxies such as SEPP, the NF profile is defined by 3GPP specifications. For custom roaming proxies, the NF profile format is not defined by 3GPP, so SCP uses the roaming-proxy-support-config REST API to create the format by specifying JSON paths and default values for profile parameters.

Identify and Route Incoming Roaming Traffic to Local Producer NFs

SCP categorizes 5G SBI traffic into the following categories:

- Ingress roaming within a PLMN: Traffic originated from remote PLMN and destined for local PLMN.
- Egress roaming across PLMNs: Traffic originated from local PLMN and destined for remote PLMN.
- Local traffic: Traffic originated from and destined to a local PLMN.

This categorization is based on the PLMN-ID and the value of the Via header. A request is identified as ingress roaming when the target PLMN-ID is local and the Via header contains a Custom Roaming Proxy identity. That identity represents the roaming proxy NF type that forwarded the request. The Via header format is configurable per Custom Roaming Proxy NF type through the roaming-proxy-support-config REST API, with a default of <NF Type>-<FQDN>, for example, 5GNIF-5gnif1.com. The Via headers are processed in reverse order of proxy insertion and stop at the first roaming proxy entry to capture the last proxy before SCP. Only ten proxy information elements are processed. All the additional elements are ignored, and an alert is raised, but the routing continues.

Determine Egress Roaming Proxy Type

When the target PLMN ID is remote, the request is treated as an egress roaming request. The type of the egress roaming proxy (SEPP, 5G NF, or any other custom roaming proxy type) to route the egress roaming request is determined by rules based on the target PLMN ID. These

rules are configured through the proxy-selection-routing-mode REST API. After the egress roaming proxy type is determined, the selection of the roaming proxy is determined based on the criteria in the following sections.

Custom Roaming Proxy Selection

Custom Roaming Proxy NF instances for a given Custom Roaming Proxy type and target PLMN ID are selected based on parameter rules defined using the roaming-proxy-selection-info REST API. These selection rules require corresponding static discovery rules configured through the nfdiscovery-cfg and nfdiscovery-mode-cfg REST APIs. If no roaming proxy selection rules are configured for a request, routing falls back to PLMN ID to roaming proxy mapping rules.

Alternate Routing and Error Handling

SCP alternate routes roaming requests sent to a Custom Roaming Proxy in the following scenarios:

- Request timeout
- Connection error
- Service mesh error
- Error from the Custom Roaming Proxy

An error from the Custom Roaming Proxy is identified by the presence of Custom Roaming Proxy information in the Server header. The Server header format is configurable per Custom Roaming Proxy NF type using the roaming-proxy-support-config REST API and defaults to <NF Type>-<FQDN>, for example, 5GNIF-5gnif1.com. If the Server header is absent, then the Via header determines the error from the Custom Roaming Proxy. If the Via header does not contain Custom Roaming Proxy information, the error is considered to be generated by the Custom Roaming Proxy.

Managing Support for Custom Roaming Proxy

Enable

By default, this feature is disabled at the time of SCP deployment. You can enable this feature by setting `interplmn_routing.enabled` and `featureSpecificConfig.customRoamingProxySupport` parameters to true.

Sample configuration:

```
{
  "featureName": "interplmn_routing",
  "enabled": false,
  "featureSpecificConfig": {
    "customRoamingProxySupport": false
  },
}
```

If `interplmn_routing.enabled` is enabled and `featureSpecificConfig.customRoamingProxySupport` is disabled, inter-PLMN routing is done through SEPP.

For more information, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Configure

You can configure this feature using REST APIs and CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see the following sections:
 - [Configuring Support for 5G SBI Roaming](#)
- **Configure using REST APIs:** To configure this feature using the REST APIs, you must perform the configuration in the following sequence:

1. Enable the Custom Roaming Proxy feature by configuring `interplmn_routing.enabled` and `featureSpecificConfig.customRoamingProxySupport` parameters as described in the "Configuring SCP Features" section.
Sample configuration:

```
"featureSpecificConfig": {
  "customRoamingProxySupport": false
}
```

2. Configure new custom roaming proxy NF type in SCP as described in the "Configuring NFTypes-NFServices" section.
Sample configuration:

```
{
  "configName": "config1",
  "nfServiceData": {
    "nfType": "5GNIF",
    "serviceName": "noservice",
    "apiName": "",
    "serviceType": [
      "notification-message-service",
      "request-message-service"
    ],
    "nfRole": CUSTOM_5G_ROAMING_PROXY
  }
}
```

3. Configure the roaming-proxy-support-config custom roaming proxy NFType as described in the "Configuring Roaming Proxy Support Config" section. You can add a new entry for the custom roaming proxy NFType or continue using the default entry if NF profile mapping and header format are matching.
Sample configuration:

```
{
  "configName": "defaultRoamingProxyConfig",
  "roamingProxySupportData": {
    "nfType": "*",
    "nfProfileMappingInfoData": {
      "scheme": {
        "jsonPointer": "/nfProfile/customInfo/scheme",
        "defaultValue": "http"
      },
      "port": {
        "jsonPointer": "/nfProfile/customInfo/port",
        "defaultValue": 80
      },
      "remotePlmnList": "/nfProfile/customInfo/remotePlmnList"
    }
  },
}
```



```

"headerFormatInfoData": {
  "via": {
    "format": [
      "NFTYPE",
      "FQDN"
    ],
    "separator": "HYPHEN"
  },
  "server": {
    "format": [
      "NFTYPE",
      "FQDN"
    ],
    "separator": "HYPHEN"
  },
  "3gpp-Sbi-Lci": {
    "lcScope": "<NFTYPE>-FQDN"
  },
  "3gpp-Sbi-Oci": {
    "olcScope": "<NFTYPE>-FQDN"
  }
},
"createdTimestamp": "2025-03-06 07:00:03",
"updatedTimestamp": "2025-03-06 07:00:03"
}

```

4. Configure roaming-proxy-info for the custom roaming proxy NF instance as described in the "Configuring Roaming Proxy Info" section. The NF profile parameter values from this configuration are used if they are absent in the received NF profile. Sample configuration:

```

{
  "configName": "config2",
  "roamingProxyInfoCfgData": {
    "nfType": "5GNIF",
    "nfInstanceId": "3faf2bbc-6e4a-2828-a507-a14ef8e1bc7b",
    "roamingProxyInfo": {
      "scheme": "http",
      "port": 65535,
      "proxyPorts": null,
      "remotePlmnList": [
        {
          "mcc": "",
          "mnc": ""
        }
      ]
    }
  },
  "createdTimestamp": "2025-11-28 11:52:31",
  "updatedTimestamp": "2025-11-28 11:52:31"
}

```

5. Configure roaming proxy selection routing mode for selection of NF type of roaming proxy as described in the "Configuring Proxy Selection Routing Mode" section. You can add a new entry or continue using the default entry.

Sample configuration:

```
{
  "configName": "defaultProxySelectionRoutingMode",
  "isRoamingRequest": true,
  "remotePlmnList": [{"mcc": "*", "mnc": "*"}],
  "nextHopProxyRoutingMode": [SEPP]
}
```

6. Configure roaming proxy selection routing for selection or discovery of the list of roaming proxy instances for routing as described in the "Configuring Roaming Proxy Selection Info" section.

Sample configuration:

```
{
  "configName": "config1",
  "roamingProxySelectionCfgData": {
    "isRoamingRequest": true,
    "targetPlmnList": [
      {
        "mcc": "*",
        "mnc": "*"
      }
    ],
    "nfType": "5GNIF",
    "nfDiscoveryParams": {
      "mandatory": {
        "target-nf-type": {
          "value": "5GNIF"
        },
        "requester-nf-type": {
          "source": "SCP",
          "value": "SCP"
        },
        "preferred-locality": {
          "source": "SCP",
          "value": "Loc1"
        },
        "remote-plmn-id": {
          "source": "CONSUMER",
          "value": "{ \"mcc\": \"123\", \"mnc\": \"456\" }"
        },
        "requester-snssais": {
          "source": "CONSUMER",
          "value": "[{ \"sd\": \"1A3F22\", \"sst\": \"2\" }]"
        },
        "target-nf-fqdn": {
          "source": "CONSUMER",
          "value": "udm1.default.svc.cluster.local"
        },
        "snssais": {
          "source": "CONSUMER",
          "value": "[{ \"sd\": \"1A3F22\", \"sst\": \"2\" }]"
        },
        "target-nf-set-id": {
          "source": "CONSUMER",

```

```

        "value": "set1.udmset.5gc.mnc015.mcc327"
      },
      "limit": {
        "value": "5"
      },
      "max-payload-size": {
        "value": "124"
      },
    },
    "optional": {
      "target-nf-instance-id": {
        "source": "CONSUMER",
        "value": "550e8400-e29b-41d4-a716-446655440000"
      },
      "requester-plmn-list": {
        "source": "CONSUMER",
        "value": "[{\"mcc\": \"123\", \"mnc\": \"456\"}]"
      }
    }
  }
}

```

7. Configure nextHopRoamingProxy for the NF service config set as described in the "Configuring Next Hop Roaming Proxy NF Service Config" section. You can add a new entry or continue using the default entry.
Sample configuration:

```

{
  "configName": "defaultNextHopRoamingProxyConfig",
  "nextHopRoamingProxyNfServiceData": {
    "loadBasedCongestionControlEnabled": true,
    "nfServiceLoadBasedCongestionControlCfg":
"defaultRuleForNextHopSepp"
  }
  "createdTimestamp": "2025-04-14 14:50:56.0",
  "updatedTimestamp": "2025-04-14 14:50:56.0"
}

```

8. Configure nextHopProxy for NF service config set as described in the "Configuring Next Hop Proxy NF Service Config" section. You can add a new entry or continue using the default entry.
Sample configuration:

```

{
  "configName": "defaultNextHopProxyConfig",
  "nextHopProxyNfServiceData": {
    "loadBasedCongestionControlEnabled": true,
    "nfServiceLoadBasedCongestionControlCfg":
"defaultRuleForNextHopScp"
  }
  "createdTimestamp": "2025-04-14 14:50:56.0",
  "updatedTimestamp": "2025-04-14 14:50:56.0"
}

```

9. Update NF service feature config set configurations for the newly configured custom roaming proxy NFType as described in the "Configuring NF Service Feature Config Set" section.

Sample configuration:

```
{
  "configName": "udm_nudm_uecm_config1",
  "nfServiceConfigSetData": {
    "defaultPriority": 1,
    "defaultCapacity": 65535,
    "altRoutingDnsSrvModeSupported": false,
    "loadBasedCongestionControlEnabled": true,
    "nfServiceLoadBasedCongestionControlCfg": "defaultRule",
    "cbEnabled": false,
    "cbRuleName": "defaultRule",
    "odEnabled": false,
    "odRuleName": "defaultRule",
    "ociEnabled": false,
    "ociRuleName": "defaultOciConfigRule",
    "canaryReleaseEnabled": false,
    "canaryReleaseConfigName": "default",
    "nextHopProxy": [
      {
        "nfType": "SCP",
        "nfServiceConfigName": "defaultNextHopProxyConfig"
      }
    ],
    "nextHopRoamingProxy": [
      {
        "nfType": "*",
        "nfServiceConfigName": "defaultNextHopRoamingProxyConfig"
      }
    ],
    "createdTimestamp": "2024-05-02 02:26:30.0",
    "updatedTimestamp": "2024-05-02 02:26:30.0"
  }
}
```

10. Configure nextHopRoamingProxy for routing config set as described in the "Configuring Next Hop Roaming Proxy Routing Config" section. You can add a new entry or continue using the default entry.

Sample configuration:

```
{
  "configName": "config2",
  "nextHopRoamingProxyData": {
    "totalTransactionLifetime": "7s",
    "responseTimeout": "4s",
    "service": {
      "maxRoutingAttempts": 2
    },
    "serviceEndpoint": {
      "maxRoutingAttempts": 1
    },
    "reRouteConditionList": [
      {
        "statusCode": "307"
      }
    ]
  }
}
```

```

        },
        {
            "statusCode": "308"
        },
        {
            "statusCode": "429"
        },
        {
            "statusCode": "5xx"
        },
        {
            "statusCode": "timeout"
        },
        {
            "statusCode": "connectionError"
        }
    ],
    "exceptions": [
        {
            "name": "No_Host",
            "action": "Send_Answer",
            "error_profile": "default_exception_error_no_host"
        },
        {
            "name": "Destination_Exhausted",
            "action": "Send_Answer",
            "error_profile":
"default_exception_error_destination_exhausted"
        }
    ]
},
"createdTimestamp": "2025-08-13 09:09:46",
"updatedTimestamp": "2025-08-13 09:09:46"
}

```

11. Configure nextHopProxy for routing config set as described in the "Configuring Next Hop Proxy Routing Config" section. You can add a new entry or continue using the default entry.

Sample configuration:

```

{
    "configName": "config1",
    "nextHopProxyRoutingConfigData": {
        "totalTransactionLifetime": "7s",
        "responseTimeout": "4s",
        "reRouteConditionList": [
            {
                "statusCode": "connectionError"
            }
        ],
        "service": {
            "maxRoutingAttempts": 2
        },
        "serviceEndpoint": {
            "maxRoutingAttempts": 1
        }
    },
}

```

```

    "exceptions": [
      {
        "name": "Destination_Exhausted",
        "action": "Send_Answer",
        "error_code": 504,
        "error_response": "Gateway Timeout",
        "error_profile": "default_exception_error_destination_exhausted"
      }
    ]
  },
  "createdTimestamp": "2024-04-24 14:50:56.0",
  "updatedTimestamp": "2024-04-24 14:50:56.0"
}

```

12. Update routing config set configurations for the newly configured custom roaming proxy NFType as described in the "Configuring Routing Config Set" section.
Sample configuration:

```

{
  "routingConfigSetName": "notification_req_default_config_set",
  "routingOptions": {
    "srv": {
      "maxRoutingAttempts": 3,
      "alternateRouting": true
    },
    "pod": {
      "alternateRouting": true,
      "maxRoutingAttempts": 1
    },
    "alternateNFGroupRoutingOptions": {
      "mode": "NF_SET"
    },
    "totalTransactionLifetime": "6s",
    "responseTimeout": "1s",
    "reRouteConditionList": [
      {
        "statusCode": "307"
      },
      {
        "statusCode": "308"
      },
      {
        "statusCode": "429"
      },
      {
        "statusCode": "5xx"
      },
      {
        "statusCode": "timeout"
      },
      {
        "statusCode": "connectionError"
      }
    ],
    "exceptionErrorResponses": [
      {

```

```

        "name": "Destination_Exhausted",
        "action": "Send_Answer",
        "error_profile":
"default_exception_error_destination_exhausted"
    },
    {
        "name": "No_Response",
        "action": "Send_Answer",
        "error_profile": "default_exception_error_no_response"
    },
    {
        "name": "Connect_Failure",
        "action": "Send_Answer",
        "error_profile": "default_exception_error_connect_failure"
    },
    {
        "name": "No_Host",
        "action": "Send_Answer",
        "error_profile": "default_exception_error_no_host"
    },
    {
        "name": "Insufficient_Time",
        "action": "Send_Answer",
        "error_profile": "timeHdrInsufficientTimeErrorProfile"
    }
],
"nextHopRoamingProxy": [
    {
        "nfType": "*",
        "routingConfigName": "defaultNextHopRoamingProxyConfig"
    }
],
"nextHopProxy": [
    {
        "nfType": "SCP",
        "routingConfigName": "defaultNextHopProxyConfig"
    }
],
"assignPreferredLocality": false,
"overridePreferredLocality": false,
"forwardRevisedPreferredLocality": false
},
"createdTimestamp": "2025-08-13 09:09:35",
"updatedTimestamp": "2025-08-13 09:09:35"
}

```

- 13.** Configure Circuit Breaking and Outlier Detection system options for nextHopProxy and nextHopRoamingProxy as described in the "Configuring System Options" section.
Sample configuration:

```

{
  "nextHopProxyODConfig": [
    {
      "nfType": "SCP",
      "odEnabled": false,

```

```

        "odRuleName": "nextHopScpODRule",
        "odHSupportEnabled": true
    }
],
"nextHopRoamingProxyODConfig": [
    {
        "nfType": "*",
        "odEnabled": false,
        "odRuleName": "defaultRule"
    }
],
"nextHopProxyCBConfig": [
    {
        "nfType": "SCP",
        "cbEnabled": false,
        "cbRuleName": "defaultRule"
    }
],
"nextHopRoamingProxyCBConfig": [
    {
        "nfType": "*",
        "cbEnabled": false,
        "cbRuleName": "defaultRule"
    }
],
"forwardNfDiscoveryHeaders": true,
"viaHeaderCheckEnabled": true,
"interPlmnFqdnValidationEnabled": false,
"trafficPolicy": {
    "connectionPool": {
        "http": {
            "idleTimeout": "600s"
        },
        "https": {
            "idleTimeout": "600s"
        },
        "tcp": {
            "connectTimeout": "250ms",
            "tcpKeepalive": {
                "enable": true,
                "probes": 9,
                "time": "180s",
                "interval": "1s"
            }
        }
    }
},
"ttl": "900s",
"dnsQueryTimeout": "5000ms"
}

```

For more information about the above mentioned REST APIs, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*:

Observe

The following metrics are used for this feature:

- `ocscp_worker_custom_roaming_proxy_http_rx_req_total`
- `ocscp_worker_custom_roaming_proxy_http_tx_req_total`
- `ocscp_worker_custom_roaming_proxy_http_rx_res_total`
- `ocscp_worker_custom_roaming_proxy_http_tx_res_total`
- `ocscp_worker_custom_roaming_proxy_routing_attempt_fail_total`
- `ocscp_worker_custom_roaming_proxy_routing_attempt_fail_current`
- `ocscp_worker_custom_roaming_proxy_not_found_total`
- `ocscp_worker_custom_roaming_proxy_not_found_current`
- `ocscp_worker_custom_roaming_proxy_unhealthy_total`
- `ocscp_worker_custom_roaming_proxy_unhealthy_current`
- `ocscp_worker_req_custom_roaming_proxy_unhealthy_total`
- `ocscp_worker_custom_roaming_proxy_selection_total`
- `ocscp_worker_custom_roaming_proxy_mandatory_disc_param_missing_total`
- `ocscp_worker_custom_roaming_proxy_nf_discovery_total`
- `ocscp_worker_custom_roaming_proxy_via_header_limit_exceeded_total`
- `ocscp_metric_req_sepp_unhealthy_total`
- `ocscp_metric_sepp_http_rx_req_total`
- `ocscp_metric_sepp_http_rx_res_total`
- `ocscp_metric_sepp_http_tx_req_total`
- `ocscp_metric_sepp_http_tx_res_total`
- `ocscp_metric_sepp_not_configured_current`
- `ocscp_metric_sepp_not_configured_total`
- `ocscp_metric_sepp_routing_attempt_fail_current`
- `ocscp_metric_sepp_routing_attempt_fail_total`
- `ocscp_metric_sepp_unhealthy_total`
- `ocscp_sepp_unhealthy`

For more information about metrics, see [Metrics](#).

The following alerts are used for this feature:

- [SCPPeerCustomRoamingProxyUnhealthy](#)
- [SCPCustomRoamingProxyRoutingNotFound](#)
- [SCPCustomRoamingProxyMaxViaHeaderProcessingCountExceeded](#)
- [SCPCustomRoamingProxyRoutingFailed](#)

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.53 Support for Alternate Routing Using Static Configuration

5G Service Based Interface (SBI) communication models establish connections among NFs and NF services. These communication models facilitate consumer NFs to route service requests to producer NFs directly or indirectly through Service Communication Proxy (SCP).

If the target producer NF is unavailable, SCP determines the NF Set ID of the target producer NF and performs alternate routing on the NF Set ID instances in a sequence until SCP completes all the configured routing attempts. In the absence of NF Set, SCP allows operators to configure FQDNs and use the Domain Name System (DNS) Service (SRV) method to find the equivalent NFs. In case the DNS SRV method is not availed by operators, then static configuration is used for alternate routing.

With the introduction of the static configuration, SCP allows operators to configure a pair or combination of primary NFs and their alternate NFs to define alternate producer NFs, which can be used in alternate NF selection when routing attempt to the primary NF fails.

The static alternate route feature prioritizes the settings in the static routing configuration over any NF profile for the alternate destination.

Managing Support for Alternate Routing Using Static Configuration

Enable

By default, this feature is disabled. To enable alternate routing using static configuration, you must complete the configuration as described in the following configuration section.

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring Routing Options](#) and [Configuring Route Groups](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring Route Groups" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.54 Support for Thread Watchdog

The Thread Watchdog feature enables SCP to monitor whether any SCP microservice threads are stuck or nonresponsive at regular intervals. If the thread watchdog reports any thread as nonresponsive or stuck, then the pod's liveness fails. If the pod's liveness failure count exceeds the failure threshold value, then the pod is restarted. If a thread doesn't respond within a specified duration, it is marked as nonresponsive or stuck. This time interval is configurable.

The failure threshold for the thread watchdog is also configurable. It determines how often the watchdog attempts to retry in case the watchdog detects a thread stuck or nonresponsiveness before declaring whether a thread is stuck or nonresponsive. Pod liveness fails when the watchdog failure count exceeds the configured threshold. These values are tuned and are not recommended to be changed.

Managing Support for Thread Watchdog

Enable

This feature is enabled automatically in SCP at the time of deployment. To disable this feature, set the `enableThreadWatchDog` parameter to `false` as described in "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Configure

You can configure this feature using REST API parameters as described in "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. To view thread watchdog configurations on the CNC Console, see [Configuring SCP Services](#).

Observe

There is no specific metric and alert required for this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.55 Message Feed Enhancements

The Message Feed feature allows copying of both request and response messages routed through SCP toward Oracle Communications Network Analytics Data Director (OCNADD) based on the configuration at SCP. Along with request and response messages, metadata, as described in [Table 3-65](#), is also sent to OCNADD.

The Message Copy feature provides SSL and SASL as a security mechanism for encryption and authentication. SSL can be configured for encryption, and it also serves as two way authentication between the scp-worker and the Kafka broker. SASL can be configured to achieve authentication of connections to brokers from scp-worker. Configuration of both SSL

and SASL can be done on SCP with secret creation and specifying them under the `ddSslConfiguration` and `ddSaslConfiguration` sections of the SCP deployment file.

From SCP 23.4.1, SCP is enhanced to select Kafka partitions based on the `kafkaPartitionSelectionLogic` REST API configuration that provides the following methods to distribute the messages:

- **RoundRobin:** All the messages are distributed across all the available partitions in a round-robin order.
- **KeyBased:** Messages with the same correlation-id are routed to the same partition. This ensures the same transaction messages are routed to the same partition.
For more information about `kafkaPartitionSelectionLogic`, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

OCNADD aggregates the data for monitoring and analytical purposes. For more information about OCNADD, see *Oracle Communications Network Analytics Data Director User Guide*.

The following table describes metadata sent to OCNADD:

Table 3-65 Metadata Table

Metadata	Description
correlation-id	Identifies transactions such as ingress downstream request, all corresponding upstream requests and responses, and downstream response.
consumer-id	Indicates the 5G NF instance ID of the originator NF, which is retrieved from the User-Agent header in the received request message. Conditions: • For SCP initiated request and response messages, for example, delegated Discovery and OAuth access token requests, consumer-id metadata must be present, and the value should be the same as the feed-source->nf-instance-id metadata value. Note: As this is an SCP instance-id, there should not be any dependency on the User-Agent header to retrieve the nf-instance-id information. • For consumer NF initiated messages, consumer-id metadata depends on the presence of the User-Agent header in the received service request. The recommended User-Agent header format is <NF Type>-<NF Instance ID> <NF FQDN>.
producer-id	Indicates the 5G NF instance ID of the destination NF.
consumer-fqdn	Indicates FQDN of the originator NF, which is retrieved from the User-Agent header in the received request message. Conditions: • For SCP initiated request and response messages, for example, delegated Discovery and OAuth access token requests, consumer-fqdn metadata must be present, and the value should be the same as the feed-source->nf-fqdn metadata value. Note: As this is an SCP FQDN, there should not be any dependency on the User-Agent header to retrieve the FQDN information. • For consumer NF initiated messages, consumer-id metadata depends on the presence of the User-Agent header in the received service request. The recommended User-Agent header format is <NF Type>-<NF Instance ID> <NF FQDN>.
producer-fqdn	Indicates FQDN of the destination NF.

Table 3-65 (Cont.) Metadata Table

Metadata	Description
hop-by-hop-id	Uniquely identifies a request-response pairs within a transaction. The hop-by-hop-id uses a maximum substring length of 30 characters for the following fields as part of the identifier: • producerFqdn: Use the first 30 characters • consumerFqdn: Use the first 30 characters • podInstanceID: Use the last 30 characters The hop-by-hop-id uses the following format to identify request-response pairs: • Consumer NF to SCP or SCP to Consumer NF (RxRequest/TxResponse) – When the consumer NF is specified in the request: Format: <First 30 characters of consumerFqdn>_<Last 30 characters of worker-pod-instance-Id> Example: udm12.oracle.com_cp-scp-worker-56df9944b6-kxthp – When the consumer NF is not specified: Format: NA_<Last 30 characters of worker-pod-instanceId> Where, NA indicates the absence of a consumer NF FQDN in the request. Example: NA_cp-scp-worker-56df9944b6-kxthp • SCP to Producer NF or Producer NF to SCP (TxRequest/RxResponse): Format: <Last 30 characters of worker-pod-instance-Id>_<First 30 characters of producerFqdn>_Suffix Where, Suffix indicates an incrementing integer that increases with each hop. Example: cp-scp-worker-56df9944b6-kxthp_udm1svc.scpsvc.svc.cluster.loc_2

Table 3-65 (Cont.) Metadata Table

Metadata	Description
reroute-cause	Indicates the reroute cause. It contains one of the following parameters: • Circuit breaking: Indicates that a message is an alternate attempt due to circuit breaking functionality at SCP. • Outlier detection: Indicates that a message is an alternate attempt due to outlier detection functionality at SCP. • Egress-rate-limit: Indicates that a message is an alternate attempt due to egress rate limiting functionality at SCP • producer-nf-congestion: Indicates that a message is an alternate attempt due to producer NF congestion • Error received • Timeout • Not Applicable
timestamp	Indicates timestamp (in nanoseconds) when message is received or forwarded by SCP.
message-direction	Indicates whether a message is an ingress message sent to SCP or an egress message forwarded by SCP. It can be indicated by putting the following traffic feed trigger point name: • RxRequest • TxRequest • RxResponse • TxResponse
feed-source	Indicates the source of this traffic feed. This contains the key-value of different identity of the node sending the traffic feed. • Feed-source • nf-type = SCP • nf-fqdn = SCP's FQDN • nf-instance-id = SCP's NF instance id • pod-instance-id = SCP-worker's pod instance id

Sample traffic feed generated by SCP:

```
{
  "version": "1.0.0",
  "metadata-list": {
    "correlation-id": "19645510-4698-4303-84f9-41c5414822e0",
    "consumer-id": "26740918-e9cd-0205-aada-71a76214d33c",
    "consumer-fqdn": "udm121.oracle.com",
    "producer-fqdn": "udm1svc.default.svc.cluster.local",
    "hop-by-hop-id": "1",
    "reroute-cause": "ErrorReceived",
    "timestamp": "1659959278583551367",
    "message-direction": "RESPONSE_EGRESS",
    "feed-source": {
      "nf-type": "SCP",
      "nf-fqdn": "ocscp-scp-worker.scpsvc.svc.cluster.local",
      "nf-instance-id": "6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e",
      "pod-instance-id": "ocscp-scp-worker-65df786b4d-qv7hs"
    }
  }
},
```

```

"header-list": {
  "server": [
    "SCP-ocscp-scp-worker.scpsvc.svc.cluster.local"
  ],
  "content-type": [
    "application/problem+json"
  ]
},
"5g-sbi-message": "{\"title\":\"Service
Unavailable\", \"status\":\"503\", \"detail\":\"Service Unavailable:: Service
Unavailable\"}"
}

```

Managing Message Copy

Enable

By default, this feature is disabled. To enable this feature, you must complete the configuration as described in the following configuration section.

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Features](#) and [Configuring Traffic Feed](#).
- **Configure using REST API:** For information about configuring REST APIs, see "Configuring SCP Features", "Configuring Traffic Feed Data Director", and "Configuring Traffic Feed Trigger Point Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The following metrics are added in the [Metrics](#) section:

- ocscp_metric_trafficfeed_attempted_total
- ocscp_metric_trafficfeed_failed_total
- ocscp_metric_trafficfeed_not_attempted_total
- ocscp_metric_trafficfeed_partition_unhealthy
- ocscp_metric_trafficfeed_success_total
- ocscp_metric_trafficfeed_cluster_unhealthy

The following alerts are added in the [Alerts](#) section:

- [SCPTrafficFeedSendFailed](#)
- [SCPTrafficFeedPartitionUnhealthy](#)
- [SCPTrafficFeedKafkaClusterUnhealthy](#)

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.

2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.56 Observability Enhancements for SCP Inter-microservice Connectivity

In the previous releases, SCP microservices communicated with each other to perform various tasks, however, there was no mechanism to determine communication failures between any two SCP microservices.

This enhancement enables SCP to improve the SCP observability by introducing observability parameters to monitor inter-microservices communication failures.

SCP microservices communicate with each other through Hypertext Transfer Protocol (HTTP). To monitor any communication failure between SCP microservices, SCP observability services are enhanced with a new metric and an alert. This observability enhancement checks inter-microservice connectivity at regular intervals. If there is any communication failure, it raises an alert based on the threshold configurations. The alert is automatically cleared when the connection is restored.

Managing Observability Enhancements for SCP Inter-microservice Connectivity

Enable

This enhancement is automatically enabled in SCP at the time of deployment.

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring SCP Services](#).
- **Configure using REST API:** For information about configuring using REST APIs, see "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

For information about alerts and metrics, see [Alerts](#) and [Metrics](#).

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.57 Load Control based on the Load Control Information Header

In the previous release, SCP was only relying on the producer NF's load information obtained from Network Repository Function (NRF) through NF status notifications, as SCP has subscribed for load status with NRF. This process might delay the availability of the instantaneous load information value at SCP.

With the introduction of Load Control based on the Load Control Information (LCI) Header feature, SCP has enhanced the existing load control functionality by enabling a direct exchange of the load information, scoped to an NF instance or an NF service instance, between 5G NFs and SCP using the "3gpp-Sbi-Lci" HTTP header.

When Service Communication Proxy (SCP) receives a "3gpp-Sbi-Lci" HTTP header, SCP calculates the effective available capacity based on the load reported by the peer NFs in LCI header or NF status notification from NRF. When SCP receives a 5G Service Based Interface (SBI) message request from a consumer NF, SCP forwards the message request to a selected target NF based on the priority and effective available capacity. If the load of the producer NF is equal to or above the throttle onset threshold percent, SCP does not consider that producer NF for routing; instead, it goes for reselection to other equivalent producer NFs.

SCP can also convey its own load control information to its peers so that the 5G NFs can take appropriate action based on its implementation. Thus, Load Control Information assists the receiver 5G NF in target NF reselection and load balancing.

Managing Load Control based on the Load Control Information Header

Enable

To enable the Load Control based on the Load Control Information Header feature, set the **Ici** option to true on the CNC Console. For more information, see [Configuring SCP Features](#).

Configure

You can configure this feature using REST API and the CNC Console.

- **Configure using REST API:** For information about the REST API configurations, see "Configuring Load Control Information" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- **Configure using CNC Console:** For information about configuring NF instance IDs, see [Configuring SCP Features](#).

Observe

For information about metrics, see [Metrics](#).

Maintain

If you encounter alerts at the system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.58 SCP Capacity Enhancements

In SCP 25.2.201 and earlier releases, the SCPC-Notification microservice supported only a single-pod deployment. It could process up to 1,200 NF profiles and create routing rules for those profiles. The SCPC-Audit microservice also supported audit operations for up to 1,200 NF profiles.

This deployment restricted the number of NF profiles that the system could process and confined the availability of SCPC-Notification during pod restart or failure.

From SCP 26.1.201, SCP enhances the capabilities of SCPC-Notification and SCPC-Audit microservices to process 3,000 NF profiles.

SCPC-Notification Enhancements

The SCPC-Notification microservice is enhanced to support multiple pods in a single deployment and can process up to 3,000 NF profiles.

With multiple SCPC-Notification replicas, the workload for NF profile processing is distributed across pods. This parallel processing increases throughput and enables the service to create routing rules for up to 3,000 NF profiles. If a single pod of SCPC-Notification is restarted, the remaining pods continue to process NF profiles without interrupting notification processing.

SCPC-Audit Enhancements

The SCPC-Audit microservice is enhanced to support audit operations for up to 3,000 NF profiles across the network.

You can make the following configurations for each NRF set:

- Audit traffic rate for both NRF management and NRF discovery services.
- Audit interval, which enables different audit frequencies for different NRF sets.
- Scheduled audit, which can be enabled or disabled independently for each NRF set.

You must configure the audit interval to ensure that an ongoing audit cycle completes before the next audit cycle begins. To determine an appropriate audit interval, calculate the audit completion time for the specific SCP deployment. You can set the audit interval to a value greater than the calculated audit completion time to prevent overlapping audit cycles.

The audit completion time depends on:

- the `ratePerNrf` (number of audit requests sent to NRF per second) parameter present in the NF Topology Audit REST API as defined in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- the number of NF instances learnt by SCP from NRF.
- the request processing time at SCP. As this value is very minimal, it is not included in the calculation.
- NRF response delay.

The following table describes some indicative numbers representing the time taken by audit:

Table 3-66 Audit Completion Time Calculation

Use Case	ratePerNrf/ Second	No. of NF Instances	No. of NFTypes	No. of NRFSet	NRF Delay*	Time Taken (approx.)
1	100	3000	16	1	2 seconds + 150 milliseconds	35 seconds
2	500					13 seconds
3	1000					12 seconds
4	100	1000		3		15 seconds per NRFSet

The formula used is as follows:

- Number of NFTypes present in SCP/ratePerNrf + Request processing time including any delays.
- Number of NF instances/ratePerNrf + Request processing time including any delays.

- Example for Use Case 2 from the above mentioned table:
 - NF list retrieval time: $(16/500) + 2.150$ seconds = ~3 seconds.
 - NF profile retrieval: $(3000/500) + 2.150$ seconds = ~ 8 seconds.
 - Total time taken: ~13 seconds.

Note

It is recommended to keep some buffer for the above mentioned calculation, and then derive the final audit interval value.

Managing SCP Capacity Enhancements

Enable

This enhancement optimizes the capabilities of SCPC-Audit and SCPC-Notification microservices. There is no specific parameter to enable or disable these capabilities.

Configure

To configure SCPC-Audit to support audit for 3000 NF profiles, you can use the following REST APIs and the CNC Console:

- **Configure using CNC Console:** For information about CNC Console configurations, see [Configuring NF Topology Audit](#).
- **Configure using REST APIs:** To configure this enhancement using the REST APIs, see the "Configuring NF Topology Audit" sections in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Observe

The [SCPAuditDurationExceeded](#) alert is supported by this feature.

Maintain

If you encounter alerts at system level, see the [Alerts](#) section for resolution steps.

In case the alerts persist, perform the following tasks:

1. **Collect the logs:** For information about how to collect logs, see *Oracle Communications Cloud Native Core, Service Communication Proxy Troubleshooting Guide*.
2. **Raise a service request:** For information about how to raise a service request, see [My Oracle Support](#).

3.59 Support for Three-site Georedundancy

Geographical Redundant (Georedundant) deployments ensure high availability and redundancy of NFs. SCP supports a three-site georedundancy deployment of cnDBTier to ensure service availability when one of the SCP sites is down.

When the primary SCP is available, NFs send service requests to the primary SCP. When SCP at the primary site is unavailable, NFs redirect service requests to the secondary SCP or tertiary SCP until the primary SCP's active status is restored.

The SCP database consists of the following:

- **Configuration Data:** The configuration data is exclusive for a given SCP instance. Therefore, an exclusive logical database is created and used by an SCP instance to store its configuration data. You can configure SCP instance specific configurations using RESTful config API exposed by SCPC-Configuration microservice through the CNC Console.
- **Routing Data:** This is the routing rules data that SCP determines from NRF in 5G Core network topology.
- **Status Data:** This data provides the status of upgrade or rollback.

In a three-site deployment, each SCP instance uses its database. The data gets replicated to all other sites of the cnDBTier cluster so that the data is available on all the cnDBTier cluster sites in case of a cnDBTier instance failure. SCP data gets replicated between the georedundant sites by using cnDBTier replication services. cnDBTier can be supported in the following modes:

- **Two-site cnDBTier georeplication mode:** The database backup from one of the sites can be used for fault recovery of SCP.
- **Three-site cnDBTier georeplication mode:** The database backup from one of the sites can be used for fault recovery of SCP.
- **One-site cnDBTier deployment mode:** The georeplication is unavailable.

For more information about database replication in a georedundant environment, see *Oracle Communications Cloud Native Core cnDBTier User Guide*.

3.60 Automated Test Suite Support

SCP provides Automated Test Suite (ATS) for validating the functionalities. ATS allows you to execute SCP test cases using an automated testing tool, and then compares the actual results with the expected or predicted results. In this process, there is no intervention from the user. For more information about installing and configuring ATS, see *Oracle Communications Cloud Native Core Automated Testing Suite Guide*.

4

Configuring Service Communication Proxy using the CNC Console

This chapter provides information about how to configure and modify different services in Service Communication Proxy (SCP) using the Oracle Communications Cloud Native Configuration Console (CNC Console).

The REST API configurations can also be performed using the CNC Console.

4.1 Support for Multiclustert Deployment

The CNC Console supports both single and multiple cluster deployments.


In a single cluster deployment, the CNC Console can manage NFs and Oracle Communications Cloud Native Environment (OCCNE) common services deployed in the local Kubernetes clusters.

In a multiclustert deployment, the CNC Console can manage NFs and OCCNE common services deployed in the remote Kubernetes clusters. For more information about single and multiple cluster deployments, see *Oracle Communications Cloud Native Configuration Console Installation, Upgrade, and Fault Recovery Guide* .

With the support of multiclustert deployment, a single instance of the CNC Console can configure two or multiple instances of SCP deployments if both CNC Console and SCP instances are deployed in the same Kubernetes cluster with different namespaces.

The following image represents a Kubernetes cluster with one instance of CNC Console and two instances of SCP. The single instance of the CNC Console is configuring two instances of SCP with different namespaces.

Figure 4-1 Support for Multiclustert Deployment

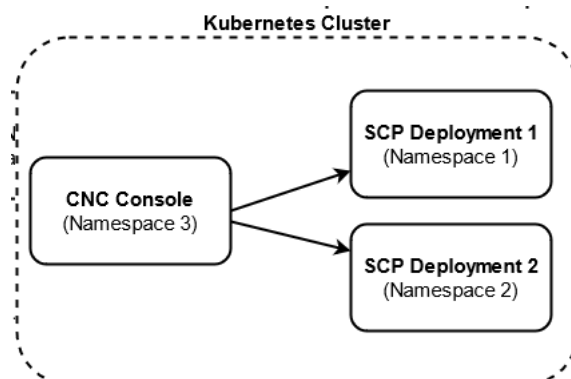

4.2 CNC Console Interface

This section provides an overview of the CNC Console to configure SCP features.

You can use SCP integrated with the CNC Console after logging in to CNC Console. To log in to the CNC Console, you must make the following updates to the hosts file at the C:\Windows\System32\drivers\etc location.

1. In the Windows system, open the hosts file in the notepad as an Administrator and append the following set of lines at the end:

```
<CNCC Node IP> cncc-iam-ingress-gateway.cncc.svc.cluster.local
<CNCC Node IP> cncc-core-ingress-gateway.cncc.svc.cluster.local
```

Example:

```
10.75.212.88 cncc-iam-ingress-gateway.cncc.svc.cluster.local
10.75.212.88 cncc-core-ingress-gateway.cncc.svc.cluster.local
```

Note

The IP Address in the above lines may change when deployment cluster changes.


2. Save and close the hosts file.
Before logging in to the CNC Console, create a CNC user and password. Log in to the CNC Console using the same credentials. For information about creating a CNC Console user and password, see *Oracle Communications Cloud Native Configuration Console Installation, Upgrade, and Fault Recovery Guide*.

Logging in to the CNC Console and Selecting an SCP Instance

Perform the following procedure to log in to the CNC Console and select the required SCP instance to configure SCP features.


1. Open any web browser.
2. Enter the URL: http://<host name>:<port number>.
Where, <host name> is cncc-iam-ingress-ip and <port number> is cncc-iam-ingressport.
3. Enter the login credentials.
4. Click **Log in**.
The CNC Console Home page appears.

Figure 4-2 CNC Console Welcome Screen

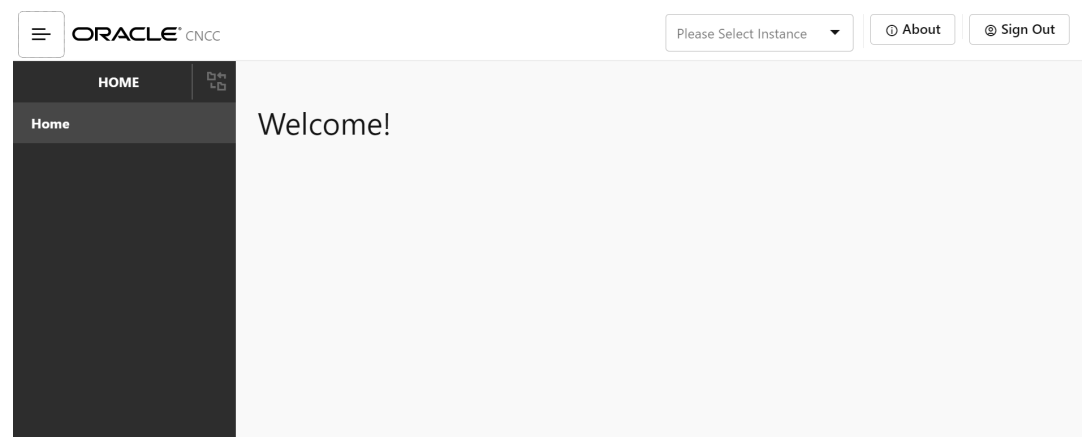

5. In the upper pane, from the **Please Select Instance** drop-down list, select the required SCP instance.
The SCP tab appears in the left navigation pane.

Figure 4-3 Select NF Instance

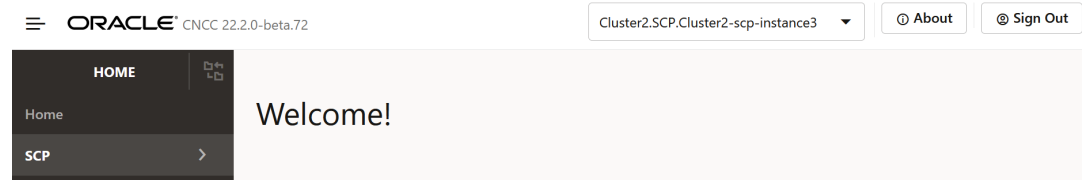

The **Please Select Instance** drop-down list provides NF instances to configure corresponding NF features. You must select an appropriate SCP instance to configure SCP features. Alternatively, you can click one of the following interface elements on the Welcome screen:

- **About:** This element provides the CNC Console product name and version.
- **Sign Out:** This element exits the CNC Console.

Note

In all the **Query Parameters** fields, do not enter keys or values in single or double quotes. For example, the "nfType"="UDM" query parameter must be entered as nfType=UDM.

4.2.1 Configuring SCP Features

This section provides information about enabling the following features of SCP:

Note

You must log in to the CNC Console while performing the procedures described in the subsequent subsections.

- Configuring Enhanced NF Status Processing
- Configuring Global Egress Rate Limiting
- Configuring Support for 5G SBI Roaming
- Configuring Mediation
- Configuring Model D Indirect 5G SBI Communication
- Configuring SCP User Agent Info
- Configuring Message Feed
- Configuring Load Control Information (LCI)
- Configuring Host Preference for Egress Message Requests
- Configuring CCA Header Validation

- Configuring Location Header Update for Host Mismatch
- Configuring Support for OAuth2.0
- Configuring SCP Health Check API
- NRF Configuration using DNS SRV Resolution
- Configuring Overload Control Based on the Overload Control Information Header
- Configuring Enhanced NFProfile Processing
- Configuring Error Response Enhancement
- Enhanced Notifications Handling
- Ingress Rate Limiting
- Egress Rate Limiting

4.2.1.1 Configuring the Log Enhancement Feature

Perform the following procedure to enable additional logging and subscriber ID in error logs.

1. From the left navigation pane, click the SCP tab, and then click the SCP Features tab.
2. To enable additional logging, from the SCP Features list, click the **Additional Logging** tab.
 - a. On the Additional Logging Feature page, click the **Edit** icon.

Figure 4-4 Additional Logging Feature

Edit Additional Logging Feature

Feature Name: additional_logging

Enabled: ☐

Feature Specific Config

SCP Generated Error Response Logging

Enabled: ☐

SCP Service Names: scp-worker x

Save Cancel

- b. To enable additional logging and add additional log attributes to error logs, set the **Enabled** option to true for additional_logging.

By default, the **Enabled** option is set to false.
- c. In the SCP Generated Error Logging section, set the **Enabled** option to true.

Note

Additional log attributes are appended to error response logs generated by SCP when the **Enabled** options of additional_logging and SCP Generated Error Logging are set to true.

- d. Set the **SCP Service Name** field to one of the following options:
 - **scp-worker**: Adds additional logging attributes to SCP-Worker logs.

- **ALL**: Adds additional logging attributes to all services logs when SCP enhances this feature to support all microservices. In this release, it supports only SCP-Worker.

Note

- This field value cannot be null.
- Do not set this field to any other microservice when it is set to **ALL**.

- e. Click **Save**.
3. To enable log subscriber information, do the following:
 - a. From the SCP Features list, click the **Log Subscriber Info** tab.
 - b. On the Log Subscriber Info Feature page, click the **Edit** icon.

Figure 4-5 Log Subscriber Info Feature

Edit Log Subscriber Info Feature

Feature Name: log_subscriber_info

Enabled: ☐

▼ **Feature Specific Config**

SCP Service Names:

- ALL x
- scp-worker
- scp-nrfproxy
- scp-nrfproxy-oauth

- c. To enable log subscriber info and add subscriber ID to error logs, set the **Enabled** option to true for log_subscriber_info. By default, the **Enabled** option is set to false.
- d. Set the **SCP Service Name** field to **ALL** or to any one or combinations of the following options:
 - **scp-worker**: Adds subscriber ID to SCP-Worker logs.
 - **scp-nrfproxy**: Adds subscriber ID to SCP-nrfProxy logs.
 - **scp-nrfproxy-oauth**: Adds subscriber ID to SCP-nrfproxy-oauth logs.

Note

- This field value cannot be null.
- Do not set this field to any other microservice when it is set to **ALL**.

4. Click **Save**.

4.2.1.2 Configuring Error Response Enhancement

Perform the following procedure to enable or disable the Error Response Enhancement feature.

1. From the left navigation pane, click the SCP tab, and then click the SCP Features tab.
2. From the SCP Features list, click the Enhanced Error Response tab.
3. On the Enhanced Error Response page, click the **Edit** icon.

By default, the **Enabled** option is set to false for `enhanced_error_rsp`. If this option is set to true, SCP combines all the error responses from both internal and external sources.

Figure 4-6 Error Response Enhancement

Enhanced Error Response Edit	
Feature Name:	enhanced_error_rsp
Enabled:	true
Feature Specific Config	
Problem Details Enhancement	
Error Detail Max Size:	2100

4. In the **Error Detail Max Size**, set the limit of the error string.

This field manages the maximum length limit of the compiled error string in the `detail` parameter of `problemDetails` as described in "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*. SCP truncates the error string from end if the compiled string is greater than the maximum limit. The default value is 2100.

5. Click **Save**.

4.2.1.3 Configuring Enhanced NF Status Processing

Perform the following procedure to enable the support for creating or retaining SCP routing rules for NF Profiles with NF Status as **SUSPENDED**.

Note

The Enhanced NF Status Processing feature is applicable only when `nnrf-nfm` (NRF Management) service is used as an audit service for SCP.

1. In the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP Features list, click **Enhanced Nf Status Processing**.
3. In the Enhanced NF Status section, click **Edit**.

Figure 4-7 Editing Enhanced Nf Status Processing

The screenshot displays the 'Enhanced NF Status' configuration interface. It includes a 'Feature Name' field with the value 'enhanced_nf_status_processing' and an 'Enabled' toggle set to 'false'. Below this is a 'Feature Specific Config' section with two fields: 'Enhanced Suspended State Routing' set to 'UDM' and 'Suspended State Routing' set to 'PCF'.

4. Set **Enabled** to true.
By default, this option is set to false.
5. In the **Feature Specific Config** section, configure the following fields as required:
 - **Enhanced Suspended State Routing:** Enter the list of valid NF types for Mode 3 routing.
 - **Suspended State Routing:** Enter the list of valid NF types for Mode 2 routing.
6. Click **Save**.

4.2.1.4 Configuring Global Egress Rate Limiting

Perform the following procedure to configure global egress rate limiting.

1. In the left navigation pane, click the **Global Egress Rate Limiting** tab.
2. In the Global Egress Rate Limit section, click **Edit**.
The Edit Global Egress Rate Limit screen appears.

Figure 4-8 Enabling the Global Egress Rate Limiting

Edit Global Egress Rate Limit

Feature Name:	Feature Name global_egress_ratelimit
Enabled:	☐

Feature Specific Config

Remote ScpOne Enabled:

Remote ScpOne Enabled
false

Remote ScpTwo Enabled:

Remote ScpTwo Enabled
false

- Set **Enabled** to true.
By default, this option is set to false.
- In the Feature Specific Config section, configure the following fields:
 - Remote ScpOne Enabled:** Set this field to true if you want to enable egress rate aggregation with the SCP instance as defined in the `coherence.federation.remoteScpOne` parameter of the `ocscp-custom-values.yaml` file. By default, this value is set to false.
 - Remote ScpTwo Enabled:** Set this field to true if you want to enable egress rate aggregation with the SCP instance as defined in the `coherence.federation.remoteScpTwo` parameter of the `ocscp-custom-values.yaml` file. By default, this value is set to false.
- Click **Save**.

4.2.1.5 Configuring Support for 5G SBI Roaming

Perform the following procedure to configure support for 5G SBI roaming and enable custom roaming proxy.

Note

Ensure that one local and one remote PLMNs are configured before enabling this feature. To configure a remote PLMN, see [Configuring SEPP Inter PLMN Routing](#).

- From the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.

2. To enable custom roaming proxy, from the SCP Features list, click the **Interplmn Routing** tab.
3. In the Interplmn Routing section, click **Edit**.
The Edit Interplmn Routing page appears.

Figure 4-9 Inter PLMN Routing

Edit Interplmn Routing

Feature Name:	Feature Name interplmn_routing
Enabled:	☐
▼ Feature Specific Config	
Custom Roaming Proxy Support:	☐
createdTimestamp:	createdTimestamp 2025-12-24 14:24:14.0
updatedTimestamp:	updatedTimestamp 2025-12-24 14:24:14.0

4. To enable support for 5G SBI roaming, set the **Enabled** option to true for interplmn_routing.
By default, this option is set to false.
5. Expand the **Feature Specific Config** section and set **Custom Roaming Proxy Support** to true.
By default, this option is set to false.
6. Click **Save**.

4.2.1.6 Configuring Mediation

Perform the following to configure mediation.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. To enable mediation, from the SCP Features list, click the **Mediation** tab.
3. In the Mediation section, click **Edit**.
The Edit Mediation screen appears.

Figure 4-10 Enable Mediation

4. Set **Enabled** to true.
By default, this option is set to false.
5. In the Feature Specific Config section, configure the following fields:
 - Set the **Enabled** true for enabling the User Defined Variable feature.

Note

If the User Defined Variable feature is enabled and any mediation rules are in the Applied state, the enabled field cannot be set back to false until all Applied rules are returned to DRAFT state.

- Set the **maxUserDefinedVariableSize** field to define the overall max size of all user defined variables included in the request or response body for mediation.
 - Default Value: 1024
 - Range: 512 - 4096
- Set the **maxUserDefinedVariableCount** field to define the total number of user defined variables that can be configured for usage at User Defined Variables API.
 - Default Value: 100
 - Range: 1-250

Note

If userDefinedVariables are added through the User Defined Variables API, the maxUserDefinedVariableCount cannot be set to a value lower than the number of userDefinedVariables currently stored in the database.

6. Click **Save**.

4.2.1.7 Configuring Model D Indirect 5G SBI Communication feature

Perform the following to configure Model D indirect 5G SBI communication feature.

1. In the left navigation pane, click the **Modeld Routing** tab.
2. In the Modeld Routing section, click **Edit**.

Figure 4-11 Enabling ModelD Routing

ORACLE

CNCC 23.3.0

Cluster1.SCP.Cluster1-scp-instance1

About

Sign Out

Enhanced NI Status Proc...

Global Egress Ratelimit

Health Check

Interplmn Routing

LCI

Location Header Update F...

Log Subscriber Info

Mediation

Model Routing

OAuth2 Support

OCI

SCP User Agent Info

Traffic Feed

NRF Bootstrap Info

Model Routing

Edit
Refresh

Feature Name:

Feature Name

Enabled:

model_routing

Enabled:

Enabled

Enabled:

false

Feature Specific Config

Caching:

Caching

Caching:

true

enforceReqSpecificSvcDiscovery:

enforceReqSpecificSvcDiscovery

enforceReqSpecificSvcDiscovery:

true

Cache Config For NRF Notification

cacheUpdateMode:

cacheUpdateMode

cacheUpdateMode:

LOCAL_REFRESH,NRF_REFRESH

useCachedRecordOnError:

useCachedRecordOnError

useCachedRecordOnError:

307,308,429,5xx,empty2xx

createdTimestamp:

createdTimestamp

createdTimestamp:

2024-08-21 15:26:07.0

updatedTimestamp:

updatedTimestamp

updatedTimestamp:

2024-08-21 15:26:07.0

The Edit Modeld Routing screen appears.

3. Set **Enabled** to true.
By default, this option is set to false.
4. Set **Caching** to true or false to enable or disable caching to store discovery responses. By default, this option is set to true.
5. Set **enforceReqSpecificSvcDiscovery** to true or false to enable or disable NF Service specific Discovery Requests when possible. By default, this option is set to true.
6. In the **Cache Config For NRF Notification** section, configure the **cacheUpdateMode** and **useCachedRecordOnError** fields accordingly:
cacheCfgForNrfNotification: Configuration for model-based D cache updates using NRF information.

It includes two fields: `cacheUpdateMode` and `useCachedRecordOnError`.

- **cacheUpdateMode** field is a list with three possible values:
 - **NONE**: No cache update will occur, and the notification will be ignored. Setting the value to "NONE" disables this feature.
 - **LOCAL_REFRESH**: The cache is updated locally if the NF-profile attribute being modified belongs to the local cache update category. If **cacheUpdateMode** is set to **LOCAL_REFRESH** only and the modified attribute requires an NRF discovery update, the notification is ignored.
 - **NRF_REFRESH**: The cache is refreshed through a new discovery request to NRF if the NF-profile attribute being modified requires an NRF discovery update. If **cacheUpdateMode** is set to **NRF_REFRESH** only and the modified attribute requires a local update, the notification is ignored.
- **useCachedRecordOnError** field indicates that SCP uses the existing invalid cached response for the defined error codes if it receives an error response from NRF, if the request times out, or if it receives a 2xx response with no profiles.
 - **Allowed values**: NONE, 5xx, empty2xx, and any valid reroutable error codes defined in the Routing Options section. These include:301, 302, 303, 304, 307, 308, 400, 401, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413,

414, 415, 416, 417, 421, 422, 425, 426, 428, 429, 431, 451, 500, 501, 502, 503, 504, 505, 506, 507, 508, 510, 511.

- **Default values:** "307", "308", "429", "5xx", "empty2xx".
- **NONE:** This value indicates that no error codes are configured. No other error codes can be used when "NONE" is set.
- **5xx:** Indicates all supported error codes starting with 5.
- **empty2xx:** This custom string is defined to handle cases where the NRF discovery response returns a 200 OK status with an empty list of profiles. If this value is configured, SCP will use the old invalid cached response.


7. Click **Save**.

4.2.1.8 Configuring SCP User Agent Info

Perform the following to configure SCP User Agent Info.

1. In the left navigation pane, click the **SCP User Agent Info** tab.
2. In the SCP User Agent Info section, click **Edit**.
The SCP User Agent Info screen appears.

Figure 4-12 SCP User Agent Info

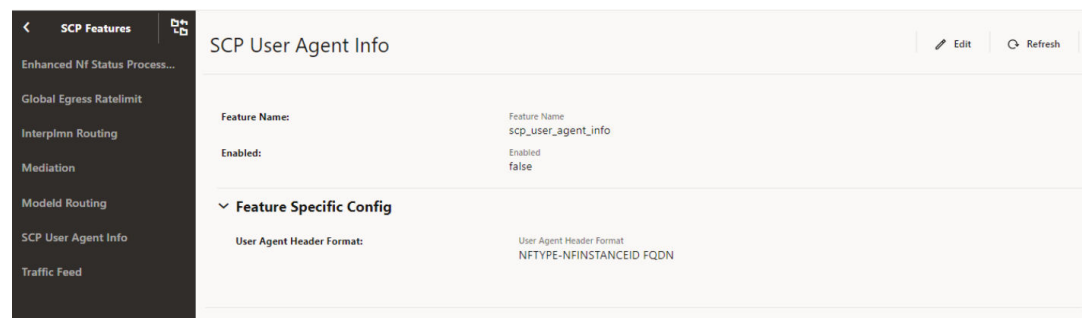

3. Set **Enabled** to true.
By default, this option is set to false.
4. Expand the Feature Specific Config option, in the **User Agent Header Format** field, select the required format to set the "User-Agent" header format.
For more information about the "User-Agent" header formats, see "Configuring SCP Features" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
5. Click **Save**.

4.2.1.9 Configuring Message Feed

Perform the following to configure message feed.

1. In the left navigation pane, click the **Traffic Feed** tab.
2. In the Traffic Feed section, click **Edit**.
The Traffic Feed screen appears.

Figure 4-13 Message Feed

Traffic Feed Edit

Feature Name:	Feature Name traffic_feed
Enabled:	Enabled false

3. Set **Enabled** to true.
By default, this option is set to false.
4. Click **Save**.

4.2.1.10 Configuring Load Control Information (LCI)

Perform the following procedure to enable configuring load control information (LCI).

1. In the left navigation pane, click the **LCI** tab.
2. In the LCI section, click **Edit**.

Figure 4-14 Editing LCI

Edit LCI

Feature Name:	lci
Enabled:	☐

Feature Specific Config

SCP LCI Conveyance Enable:	☐
Relay Peer Lci:	☐
SCP LCI Conveyance Interval:	SCP LCI Conveyance Interval 3600
SCP LCI Minimum Load Change:	SCP LCI Minimum Load Change 25
SCP LCI Conveyance Minimum Load Threshold:	SCP LCI Conveyance Minimum Load Threshold 25
SCP LCI Conveyance to Unknown peer:	☐
Peer LCI Processing Minimum Load Change:	Peer LCI Processing Minimum Load Change 25
Unknown peer LCI Expiry time:	Unknown peer LCI Expiry time 900

Save Cancel

3. Set **Enabled** to true.
By default, this option is set to false.
4. In the **Feature Specific Config** section, complete the following configurations:

Note

All the parameters are mandatory to configure the LCI feature.

- **SCP LCI Conveyance Enable:** Set to true to enable SCP to add its LCI in request and response.
- **Relay Peer Lci:** Set to true to allow SCP to forward the received LCI header from producer NF.
- **SCP LCI Conveyance Interval:** Enter a value from 100 milliseconds to 3600000 milliseconds to report the SCP LCI update interval.
- **SCP LCI Minimum Load Change:** Enter a value from 0 to 25 to report the minimum delta value when reporting LCI based on load change.
- **SCP LCI Conveyance Minimum Load Threshold:** Enter a value from 0 to 60 to set a minimum load change threshold to trigger the generation of an LCI header and its reporting to peers if allowed.

Note

If the SCP load value is less than the configured SCP LCI Conveyance Minimum Load Threshold value, SCP sends its load value as 0%.

- **SCP LCI Conveyance to Unknown peer:** Set to true to allow SCP to send its LCI to an unknown peer NF, a peer NF that is not registered with SCP.

Note

- SCP sends its LCI in all the messages that go to peer NFs that are not registered with SCP.
- If the SCP load value is less than the configured SCP LCI Conveyance Minimum Load Threshold value, SCP sends its load value as 0%.

- **Peer LCI Processing Minimum Load Change:** Enter a value from 0 to 25 to define a minimum load change threshold in peer NF's load as indicated in LCI, which can trigger a re-evaluation of routing rules.
- **Unknown peer LCI Expiry time:** Enter a value between 30 seconds to 900 second to set the minimum number of seconds required to remove an unknown peer's LCI from cache.

5. Click **Save**.

4.2.1.11 Configuring Host Preference for Egress Message Requests

Perform the following procedure to configure host preference for egress message requests.

1. In the left navigation pane, click the **Egress Host Preference** tab.
2. In the Egress Host Preference section, click **Edit**.

Figure 4-15 Editing Egress Host Preference

Request

Api Root Header Present:

Api Root Header Present
PASSTHROUGH

Api Root Header Not Present:

Api Root Header Not Present
IP

SCP Generated NRF Message:

SCP Generated NRF Message
IP

Response

Headers:

Headers
FOLLOWREQUEST

Fqdn Resolution

Fqdn:

Fqdn
NFPROFILE

InterPlmn Fqdn:

InterPlmn Fqdn
DNS

- Set Enabled to true.
By default, this option is set to false.
- In the **Feature Specific Config** section, to configure the host preference, set the following fields as described in the following table:

Table 4-1 Host Preference

Field Name	Description
Api Root Header Present	This parameter indicates the host preference (":authority" header) for egress message requests if the 3gpp-Sbi-Target-apiRoot header is present in the ingress message request. You can set this field to PASSTHROUGH to use the same type of host in egress message requests as received through ingress message requests. Default value: PASSTHROUGH Range: IP, FQDN, or PASSTHROUGH
Api Root Header Not Present	This parameter indicates the host preference (":authority" header) for egress message requests if the 3gpp-Sbi-Target-apiRoot header is absent in ingress message requests. Default value: IP Range: IP or FQDN
SCP Generated NRF Message	This parameter indicates the host preference (":authority" header) for SCP generated NRF messages. Default value: IP Range: IP or FQDN
Fqdn	This parameter indicates the resolution preference of egress message requests host FQDN if present. Default value: NFPROFILE Range: DNS or NFPROFILE

Table 4-1 (Cont.) Host Preference

Field Name	Description
InterPlmn Fqdn	This parameter indicates the resolution preference of egress message requests inter-plmn FQDN if present. Default value: DNS Range: DNS or NFPROFILE

5. Click **Save**.

4.2.1.12 Configuring CCA Header Validation

Perform the following option to configure CCA Header validation.

1. In the left navigation pane, click the **CCA Header Validation** tab.
2. In the CCA Header Validation section, click **Edit**.

Figure 4-16 Edit CCA Header Validation

Oracle CNC 23.2.0 Cluster1.SCP.Cluster1-scp-instance1 About Sign Out

CCA Header Validation Edit Refresh

Feature Name: cca_header_validation
Enabled: false

Feature Specific Config

Validations:

Type	Error Profile Name	Producer NFType	
subject	ccaVerificationError		Edit Delete

tls crt san

preferred_validation_order: URI-ID-URN,DNS-ID,IP-ADDRESS,URI-ID-APIROOT
max_entries_to_process: 30

3. Set Enabled to true.
By default, this option is set to false.

Note

SCP supports the 3gpp-Sbi-Client-Credentials header with x5c - X.509 URL, not x5u - X.509 URL.


4. In the **Feature Specific Config** section, to configure the validations, set the following fields as described in the following table:

Table 4-2 Validations

Field Name	Description
Type	Type of validation: - headerPresence: SCP checks the presence of the 3gpp-Sbi-Client-Credentials header in the ingress request. - Validation will pass if the header is present. - Validation will fail if the header is not present. - subject: SCP checks the NF instance ID from the "sub" parameter in the 3gpp-Sbi-Client-Credentials header with the NF instance ID from the list of SANs in the client's TLS certificate. SANs directly have the NF Instance Id or the client's other identity, like the FQDN or IP address, which will be used to get the NF Instance Id. If the 3gpp-Sbi-Client-Credentials header is not present, then this validation will not be performed. - Validation will pass if the NF instance ID from the "sub" parameter matches the NF instance ID from the SAN. - Validation will fail if the NF instance ID from the "sub" parameter doesn't match the NF instance ID from the SAN.
Error Profile Name	The error profile name is used to generate an error response if the corresponding validation fails. Error profiles can be configured using the REST API: /ocscp/scpc-configuration/{version}/errorProfileConfig.
Product NF Type	Default Value: Null
preferred_validation_order	An order format-wise from which the SCP picks SAN from the client's TLS certificate for verification of the "subject" type of validation. Note: Applicable only when validation type "subject" is selected.
max_entries_to_process	Maximum number of SANs from the client's TLS certificate that SCP picks for validation. Note: Applicable only when validation type "subject" is selected.

5. Click **Add** to add validations:

Figure 4-17 Add Validations

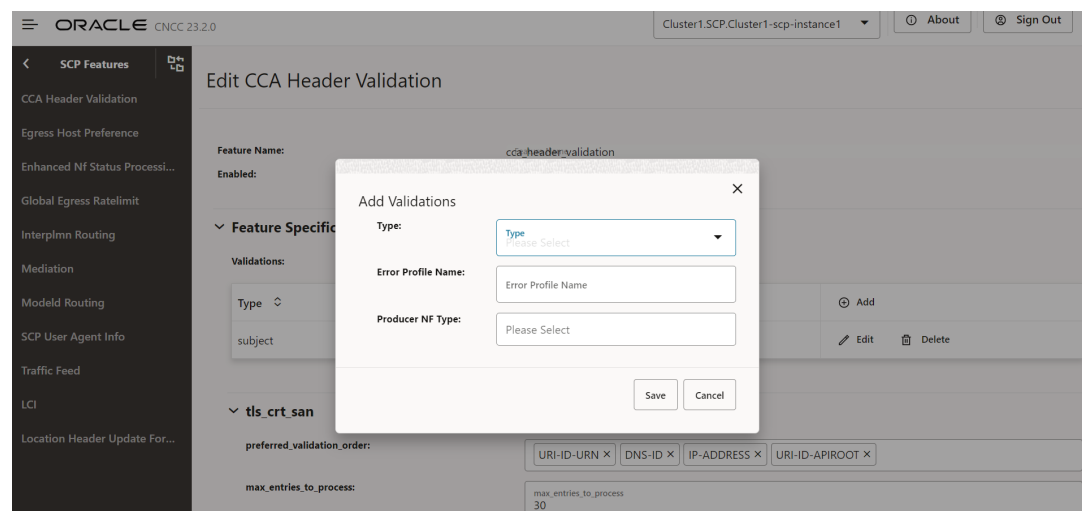


6. Click **Save**.

4.2.1.13 Configuring Location Header Update for Host Mismatch

Perform the following the procedure to configure location header update for host mismatch.

1. In the left navigation pane, click the **Location Header Update For Host Mismatch** tab.
2. In the Location Header Update For Host Mismatch section, click **Edit**.

Figure 4-18 Edit Location Header Update For Host Mismatch

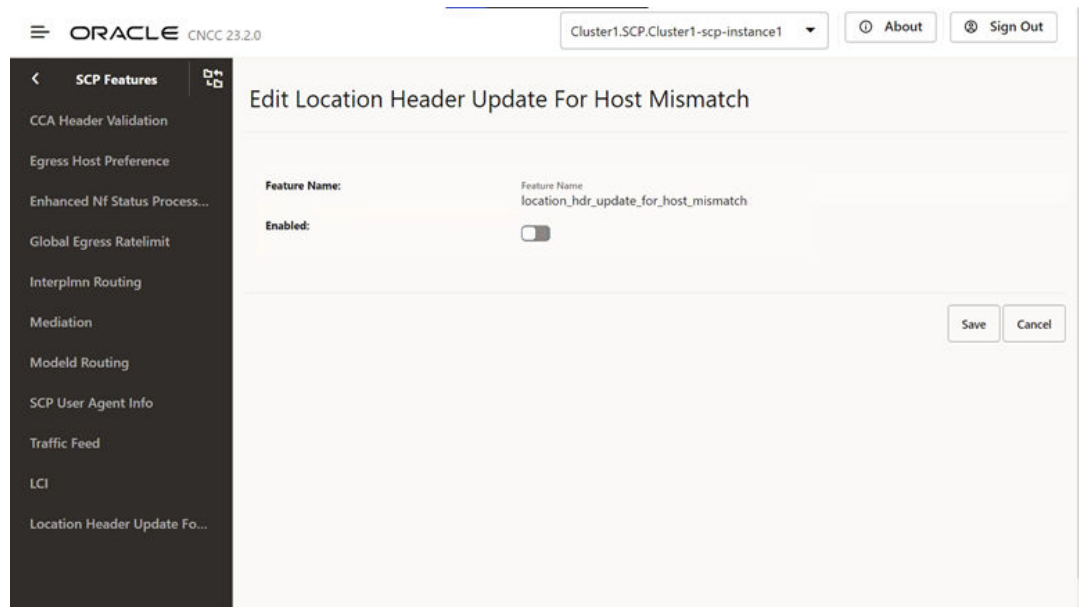

3. Set Enabled to true.
By default, this option is set to false.
4. Click **Save**.

4.2.1.14 Configuring Support for OAuth2.0

Perform the following the procedure to configure support for OAuth2.0.

1. In the left navigation pane, click the **OAuth2 Support** tab.
2. In the OAuth2 Support section, click **Edit**.

Figure 4-19 OAuth2 Support

Feature Name:	Feature Name
Enabled:	☐
Feature Specific Config	
SCP Access Token Capability:	SCP Access Token Capability
Access Token Conveyance:	☐
OAuth2 Access Token Validation:	☐
Access Token Validation Types:	Access Token Validation Types
Access Token Refresh Guard Time:	Access Token Refresh Guard Time
Access Token Validity Guard Time:	Access Token Validity Guard Time
Access Token Clean Up Post Expiry:	Access Token Clean Up Post Expiry
Access Token History Size:	Access Token History Size
Access Token Cache Size:	Access Token Cache Size
Requester Info:	Requester Info

- Set Enabled to true.
By default, this option is set to false.
- In the **Feature Specific Config** section, complete the following configurations:

Table 4-3 Configure Access Token

Field Name	Description
SCP Access Token Capability	This field indicates Access token support for the listed indirect communication modes at SCP. (ENUM). Possible values: [INDIRECT_COM_WITH_DELEG_DISC, INDIRECT_COM_WITHOUT_DELEG_DISC] - INDIRECT_COM_WITH_DELEG_DISC: SCP initiates access token request toward NRF in delegated discovery service request. - INDIRECT_COM_WITHOUT_DELEG_DISC: SCP is expected to forward the service request with or without access token as per configuration at SCP. SCP is not expected to initiate access token request toward NRF.

Table 4-3 (Cont.) Configure Access Token

Field Name	Description
Access Token Conveyance	This field conveys acquired access token in the "3gpp-Sbi-Access-Token" header in service response to consumer NFs. • Default value: true • Range: true or false
OAuth2 Access Token Validation	This field enables or disables validation of OAuth2 access token from consumer NFs. • Default value: Disabled • Range: Disabled or Enabled
Access Token Validation Types	This field configures the list of required validation types in the network. • Default value: empty as default • Range: Disabled or Enabled
Access Token Refresh Guard Time	This field initiates proactive refresh of cached access token when the configured time expires. The proactive refresh occurs if the relevant SBI messages are in exchange. • Default value: 60000ms • Range: 100ms - 300000ms
Access Token Validity Guard Time	This field indicates the time before the access token expiry when SCP considers not to use the existing access token and obtains new access token in the service request forwarded to producer NFs. • Default value: 30000ms • Range: 100ms - 300000ms
Access Token Clean Up Post Expiry	This field indicates the duration to purge the token from cache. • Default value: 900000ms • Range: 0ms - 3600000ms
Access Token History Size	This field indicates the number of access tokens signature history to identify whether the access token initiated by SCP or not. • Default value: 10 records • Range: 0 - 20 records
Access Token Cache Size	This field indicates the number of access tokens that can be cached in SCP. • Default value: 50000 records • Range: 5000 - 100000 records
Requester Info	This field indicates access token requester (consumer NF) Info to generate the access token request. • Prioritized list of default values: - DISCOVERY-HEADERS - CCA-HEADER - USER-AGENT-HEADER
Cache Enabled	This option enables or disables caching of access tokens. • Default value: true • Range: true or false

5. Click **Save**.

4.2.1.15 Configuring SCP Health Check API

Perform the following the procedure to configure SCP health check API.

1. In the left navigation pane, click the **Health Check** tab.
2. In the Health Check section, click **Edit**.

Figure 4-20 Health Check

Feature Name: health_check

Enabled: ☒

✓ **Feature Specific Config**

✓ **SCP Health API**

Success Response Type: Success Response Type
200_WITH_EMPTY_PAYLOAD

✓ **Overload**

Average SCP Load Threshold Value: Average SCP Load Threshold Value
75

Overload Response Profile: Overload Response Profile
healthCheckErrorProfile

✓ **Next Hop SCP**

SCP Health Check Service Enabled: ☐

Request Timeout: Request Timeout
1000

Polling Interval: Polling Interval
1000

3. Ensure that Enabled is set to true. This is the default configuration.
4. In the **Feature Specific Config** section, you can modify the following configurations:

Table 4-4 Configure Health Check API

Field Name	Description
Success Response Type	This field indicates successful responses for a healthy SCP. • Default value: 200StatusCodeAndEmptyPayload • Range: 200WithPayload, 200WithEmptyPayload, and 204WithNoContent
Average SCP Load Threshold Value	This field provides the overall average SCP load threshold value. • Default value: 75% • Range: 75% - 90%

Table 4-4 (Cont.) Configure Health Check API

Field Name	Description
Overload Response Profile	This field indicates the error profile configuration for the health query response in the exception conditions. Default value: healthCheckErrorProfile. For more information about this option, see "Configuring Error Profiles" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>.
SCP Health Check Service Enabled	This option enables or disables the SCP health check API feature in inter-scp scenarios. - Default value: false - Range: true or false
Request Timeout	This field indicates the timer to monitor the waiting time for health check response in inter-scp scenarios. - Default value: 1000ms - Range: 300ms -60000ms
Polling Interval	This field indicates the duration to control the periodicity of health check requests in inter-scp scenarios. - Default value: 1000ms - Range: 300ms -60000ms
Consecutive Error Response	This field indicates the total number of consecutive failure responses that leads to failover in inter-scp scenarios. - Default value: 3 - Range: 1 - 20
Consecutive Success Response	This field indicates the total number of consecutive successful responses that leads to fallback in inter-scp scenarios. - Default value: 3 - Range: 1 - 20

- Click **Save**.

4.2.1.16 NRF Configuration using DNS SRV Resolution

Perform the following procedure to NRF configuration using DNS SRV resolution.

- In the left navigation pane, click the **NRF Bootstrap Info** tab.
- In the NRF Bootstrap Info section, click **Edit**.

Figure 4-21 Edit NRF Bootstrap Info

The screenshot shows a configuration window titled "Edit NRF Bootstrap Info". It contains the following fields and controls:

- Feature Name:** nrf_bootstrap_info
- Enabled:** A toggle switch that is currently turned off.
- Feature Specific Config:** A section with a dropdown menu for **Source** set to "DNS_SRV".
- DeRegister Scp During Migration:** A toggle switch that is currently turned off.
- Buttons:** "Save" and "Cancel" buttons at the bottom right.

- Set Enabled to true.
By default, this option is set to false.

4. In the **Feature Specific Config** section, enter the following input for the following configurations:

Table 4-5 Configure NRF Source Configuration

Field Name	Description
Source	This field is used to select whether the NRF Configuration Using DNS SRV Resolution feature should be enabled or disabled. SCP will enable the feature if the source is DNS_SRV. The default value is DNS_SRV.
deRegisterScpDuringMigration	In the migration from static to DNS SRV task, if static and DNS SRV NRF configurations are the same, then this parameter will be used to deregister SCP with the old or static NRFset. • Default value: false • Range: true or false

5. Click **Save**.

4.2.1.17 Configuring Overload Control Based on the Overload Control Information Header

Perform the following procedure to configure overload control based on the overload control information header.

1. From the SCP Features list, click the OCI tab.
2. On the OCI page, click the **Edit** icon.

Figure 4-22 Edit OCI

Edit OCI

Feature Name:	Feature Name oci
Enabled:	☐
Feature Specific Config	
olcHSupportInd:	☒
SCP OCI Conveyance Interval:	SCP OCI Conveyance Interval 2,000
SCP OCI Recovery Validity Period:	SCP OCI Recovery Validity Period 3,600
Next Hop SCP OCI Enabled:	☒

3. In the Edit OCI section, set **Enabled** to true.
By default, this option is set to false.

Figure 4-23 Enabling OCI

Next Hop SCP OCI Rule Name:

Next Hop SEPP OCI Enabled: ☒

Next Hop SEPP OCI Rule Name:

▼ **scpOciConveyance**

enable: ☒

▼ **unknownPeer**

request: ☒

response: ☒

Save Cancel

4. To configure OCI, in the Feature Specific Config section, set the following fields:

Table 4-6 Configure OCI

Field Name	Description
olcHSupportInd	This option indicates that SCP supports the Overload Control Information (OCI) feature based on the 3gpp-Sbi-Oci header. By default, this option is enabled.
SCP OCI Conveyance Interval	This field indicates the interval for reporting SCP OCI to peer NFs. For every interval until the validity period, the last sent OCI is reported to peer NF irrespective of any change to SCP OCI. Sending SCP OCI periodically ensures that the peer NF has not missed an earlier reported SCP OCI. The same OCI header as sent on the last OCI threshold change or validity period expiry is sent. - Default value: 2000 milliseconds - Range: 2000 to 3600000 milliseconds Note: OCI is sent to peer NFs only if there is a message for that NF.
SCP OCI Recovery Validity Period	This field indicates the validity period to send OCI headers to peers when SCP recovers from an overloaded state. SCP sends OCI to peers with reduction metric as 0. - Default value: 3600 seconds - Range: 5 to 3600 seconds
Next Hop SCP OCI Enabled	This option enables or disables the OCI feature between SCP instances and SCP scope OCI. By default, this option is enabled.
Next Hop SCP OCI Rule Name	If the Next Hop SCP OCI Enabled option is enabled, the OCI feature enforcement is done based on the ociConfigRule REST API configuration with the name provided as the value for this option. By default, this value is NextHopScpOciRuleName.
Next Hop SEPP OCI Enabled	This option enables or disables OCI enforcement between SCP and SEPP interfaces and SEPP scope OCI. By default, this option is enabled.

Table 4-6 (Cont.) Configure OCI

Field Name	Description
Next Hop SEPP OCI Rule Name	If the Next Hop SEPP OCI Rule Name option is enabled, the OCI feature enforcement is done based on the ociConfigRule REST API configuration with the name provided as the value for this option. By default, this value is NextHopSeppOciRuleName.
scpOciConveyance	If this option is set to true, SCP starts conveying the 3gpp-Sbi-Oci header based on self-overload information. By default, this option is enabled.
unknownPeer • request	If this field is set to true, SCP starts conveying the 3gpp-Sbi-Oci header based on self-overload information to requests to unknown peers. For unknown peers, identification of peer NFs is done based on the message request's FQDN. By default, this option is enabled.
unknownPeer • response	If this option is set to true, SCP starts conveying the 3gpp-Sbi-Oci header based on self-overload information to responses to unknown peers. If this parameter is set to true, SCP adds self-OCI header in every response message. By default, this option is disabled.


- Click **Save**.

4.2.1.18 Configuring Enhanced NFProfile Processing

Perform the following procedure to enable the NFProfile Processing enhancements supported by SCP using Cloud Native Configuration Console (CNC Console).

- In the left navigation pane, click the **Ignore Unknown Nf Service** tab.
The Ignore Unknown Nf Service page appears.

Figure 4-24 Ignore Unknown Nf Service

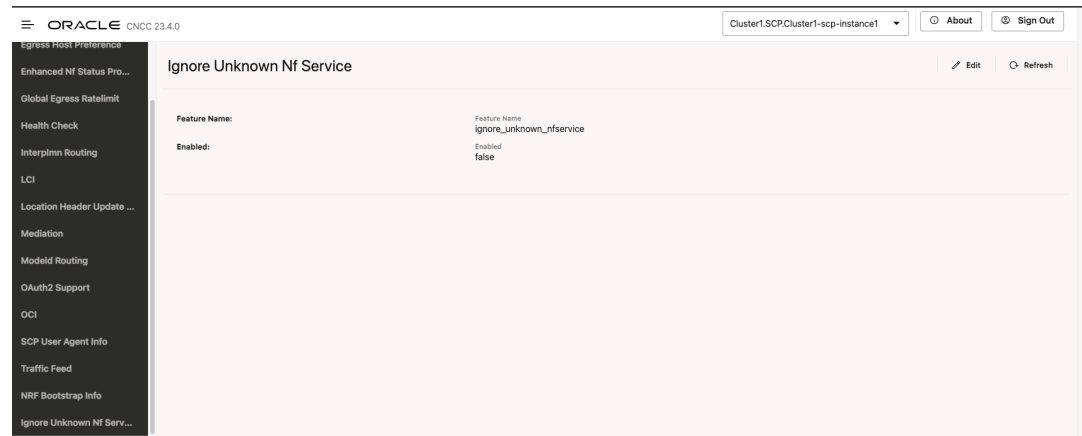

- On the Ignore Unknown Nf Service page, click the **Edit** icon.
- In the **Edit Ignore Unknown Nf Service** section, set **Enabled** to true.
By default, this option is set to false.

4.2.1.19 Configuring 3GPP Timestamp Headers Support

Perform the following procedure to enable or disable the 3GPP Timestamp Related Headers Support feature and configure its settings.

1. In the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP Features list, click **Timestamp Header Support**.
3. In the Timestamp Header Support section, click **Edit**.

Figure 4-25 Edit Timestamp Headers Support

4. Set **Enabled** to true.
By default, this option is set to false.
5. In the **Feature Specific Config** section, configure the following fields as required:
 - **Dynamic Response Timeout:** This field, when set to true, enables SCP to perform dynamic response time calculations based on the received timestamp headers. It updates or adds the 3gpp-Sbi-Sender-Timestamp and 3gpp-Sbi-Max-Rsp-Time headers in the egress SBI request.
 - Date Type: Boolean
 - Default Value: true
 - Range: true or false
 - **Update Timestamp Headers:** This field, when set to true and dynamicResponseTimeout is false, allows SCP to add or update the 3gpp-Sbi-Sender-Timestamp and 3gpp-Sbi-Max-Rsp-Time headers in the egress SBI request. The 3gpp-Sbi-Sender-Timestamp is set to reflect the current timestamp at scp-worker, while the 3gpp-Sbi-Max-Rsp-Time will be set to the configured responseTimeout value for the specific service.
 - Date Type: Boolean
 - Default Value: true
 - Range: true or false

Note

When `dynamicResponseTimeout` is true, the value of `updateTimestampHeaders` will not have any impact and should be set to true. In this case, SCP will always add or update the `3gpp-Sbi-Sender-Timestamp` and `3gpp-Sbi-Max-Rsp-Time` headers in the egress SBI request.

- **Response Transit Time:** This field specifies the minimum estimated transit time required (in milliseconds) for the response to reach back from SCP to the original sender, whether it's the Consumer NF, SCP, or SEPP.
 - Default Value:

```
"responseTransitTime": {
  "downstreamNF": 50,
  "downstreamSCP": 100,
  "downstreamSEPP": 300
}
```
 - Range: NA
- **Downstream NF:** This field specifies the minimum estimated transit time required (in milliseconds) for the response to return to the original requester NF.
 - Date Type: Integer
 - Default Value: 50
 - Range: 0 - 10000
- **Downstream SCP:** This field specifies the minimum estimated transit time required (in milliseconds) for the response to return to the original requester SCP.
 - Date Type: Integer
 - Default Value: 100
 - Range: 0 - 10000
- **Downstream SEPP:** This field specifies the minimum estimated transit time required (in milliseconds) for the response to return to the original requester SEPP.
 - Date Type: Integer
 - Default Value: 300
 - Range: 0 - 10000

6. Click **Save**.

Note

For optimal functionality, this feature requires NTP (Network Time Protocol) synchronization across all nodes communicating with the SCP, including the SCP itself.

4.2.1.20 Configuring Enhanced Notifications Handling

Perform the following procedure to enable or disable the Enhanced Notifications Handling feature.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP features' list, click the **Enhanced Notifications Handling** tab.
3. In the Enhanced Notifications Handling section, click **Edit**.
4. Set **Enabled** to true.
By default, this option is set to false.
5. In the Feature Specific Config section, set **Alternate Routing Without Servname** to true.
By default, this option is set to false.
6. Ensure that the following fields display the time of occurrence of the records:
 - **Created Timestamp**: Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
 - **Updated Timestamp**: Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

4.2.1.21 Configuring Ingress Rate Limiting

Perform the following procedure to enable or disable the Ingress Rate Limiting feature.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP features' list, click the **Ingress Rate Limiting** tab.
3. In the Ingress Rate Limiting section, click **Edit**.
4. Ensure that **Enabled** is set to true.
By default, this option is set to true.
5. Ensure that the following fields display the time of occurrence of the records:
 - **createdTimestamp**: Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
 - **updatedTimestamp**: Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

4.2.1.22 Configuring Egress Rate Limiting

Perform the following procedure to enable or disable the Egress Rate Limiting feature.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP features' list, click the **Egress Rate Limiting** tab.
3. In the Egress Rate Limiting section, click **Edit**.
4. Ensure that **Enabled** is set to true.
By default, this option is set to true.
5. Ensure that the following fields display the time of occurrence of the records:
 - **createdTimestamp**: Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
 - **updatedTimestamp**: Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

4.2.1.23 Configuring NF Discovery Enhancement

Perform the following procedure to enable SCP to enhance its NF discovery mechanism.

1. From the left navigation pane, click the SCP tab, and then click the SCP Features tab.
2. To enable NF discovery, from the SCP Features list, click the **NF Discovery Enhancement** tab.
3. In the NF Discovery Enhancement section, click **Edit**.
4. In the `nf_discovery_enhancement` Feature Name section, set **Enabled** is to true.
By default, this option is set to false.
5. In the **Eligible NF Status For Local Discovery responses** field, configure the NF type to be used for the static discovery.
6. Ensure that the following fields display the time of occurrence of the records:
 - **createdTimestamp**: Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
 - **updatedTimestamp**: Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
7. Click **Save**.

4.2.1.24 Configuring NF Selection Enhancements

Perform the following procedure to enable SCP to enhance its NF selection using NF selection mode configuration.

1. From the left navigation pane, click the SCP tab, and then click the SCP Features tab.
2. To enable NF discovery, from the SCP Features list, click the **NF Selection Enhancement** tab.
3. In the NF Selection Enhancement section, click **Edit**.
4. In the `nf_selection_enhancement` Feature Name section, set **Enabled** is to true.
By default, this option is set to false.
5. Ensure that the following fields display the time of occurrence of the records:
 - **createdTimestamp**: Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
 - **updatedTimestamp**: Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
6. Click **Save**.

4.2.1.25 Configuring SubscriberId to NF GroupId Resolution

Perform the following procedure to manage subscriber ID to group ID resolution.

1. From the left navigation pane, click the SCP tab, and then click the SCP Features tab.
2. To enable subscriber ID to group ID resolution, from the SCP Features list, click the **SubscriberId to NF GroupId Resolution** tab.
3. In the SubscriberId to NF GroupId Resolution section, click **Edit**.
4. In the `subid_to_nfgrp_id_resolution` Feature Name section, set **Enabled** is to true.

By default, this option is set to false.

5. Complete the following feature specific configurations:

- **Supported Deployment Modes:** Specifies the supported deployment modes for SLF lookup configuration in indirect communication scenarios. Only predefined values are allowed, and duplicate entries are not permitted.
- **Supported NFTypes:** Defines the list of applicable target NF types for which this feature is enabled. Values must be valid NF types from the NfType-NfService REST API, must not include *, must be unique, and the list must not be empty.
- **Forward ResolvedSubId To NextHopScp:** Determines whether the subscriber ID is removed when forwarding a request to the next SCP after group ID resolution in inter-SCP scenarios.
- **Forward Received SubId To Nrf:** Controls whether the received subscriber ID is included as a query parameter during NRF discovery when both subscriber ID and group ID are present.
- **Forward Received SubId To NextHopScp:** Specifies whether the subscriber ID header should be removed before forwarding the request to the next SCP when both the subscriber ID and group ID are present.

For more information about above mentioned fields' configuration values, see the corresponding REST API parameters in the "Configuring SCP Features" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.


6. Click **Save**.

4.2.2 Configuring OCI

Perform the following procedure to retrieve, modify, and remove OCI configuration data.

1. From the left navigation pane, click the **SCP** tab, and then click the **OCI** tab.
2. From the left navigation pane, click the **OCI Config** tab.
3. In the OCI Config section, click **Get** to retrieve OCI configuration data based on the query parameters.

Figure 4-26 OCI Config

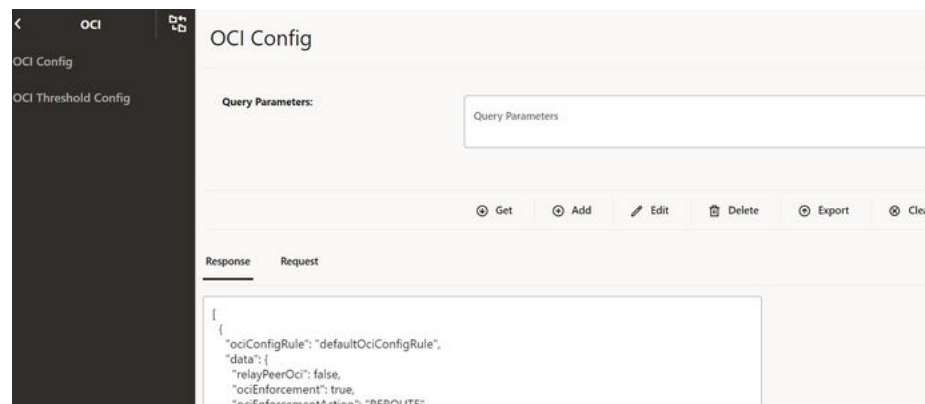

4. To add a new request, click **Add** and enter the request body information in the **Request** field.

- Click **Submit**.

The request body message appears in the **Response** field.

To edit, export, delete, or clear the data, click the required buttons as described in the following table:

Table 4-7 Button and Field Descriptions of OCI


Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve, add, and update OCI configuration data based on the query parameters.
Get	Retrieves OCI configuration data. You can modify this data using the Edit button.
Add	Adds new message requests in the Request field.
Edit	Modifies any existing data by updating mandatory query parameters in the Query Parameters field.
Delete	Removes any message request.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

4.2.3 Configuring OCI Threshold Levels

Perform the following procedure to retrieve, modify, and remove OCI threshold configuration data.

- From the left navigation pane, click the **SCP** tab, and then click the **OCI** tab.
- From the left navigation pane, click the **OCI Threshold Config** tab.
- In the OCI Threshold Config section, click **Get** to retrieve OCI threshold configuration data based on the query parameters.

Figure 4-27 OCI Threshold Config

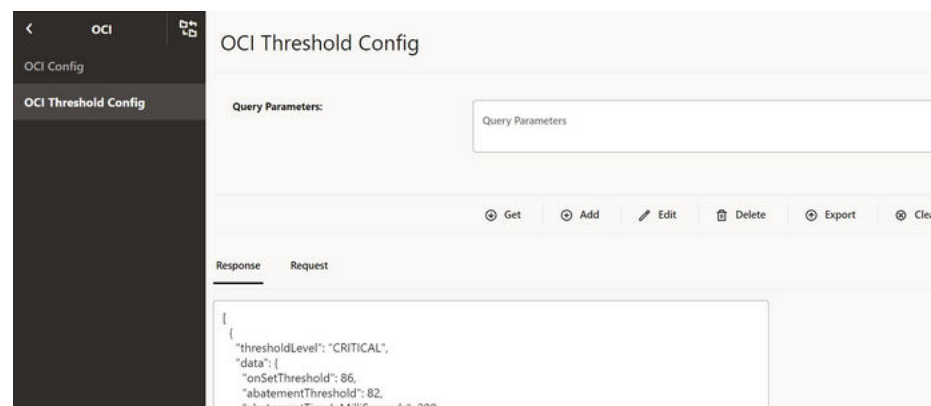

- To add a new request, click **Add** and enter the request body information in the **Request** field.
- Click **Submit**.

The request body message appears in the **Response** field.

To edit, export, delete, or clear the data, click the required buttons as described in the following table:

Table 4-8 Button and Field Descriptions of OCI Threshold Configuration

Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve, add, and update OCI threshold configuration data based on the query parameters.
Get	Retrieves OCI threshold configuration data. You can modify this data using the Edit button.
Add	Adds new message requests in the Request field.
Edit	Modifies any existing data by updating mandatory query parameters in the Query Parameters field.
Delete	Removes any message request.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

4.2.4 Viewing cnDBTier APIs on the CNC Console

Perform the following procedure to view the cnDBTier version, the status of cnDBTier clusters, georeplication status, and georeplication recovery status on the CNC Console.

Note

The following cnDBTier APIs are read only.

4.2.4.1 Backup List

Perform the following procedure to view the list of completed backups:

- From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
- Click the **Backup List** to view the list of completed backups along with Backup ID, Backup size, and Creation Timestamp.
The **Backup List** screen is displayed.

Table 4-9 Backup List

Fields	Description
Backup Details	This field displays information such as backup Id, backup size, and backup creation timestamp.
Site Name	This field displays the name of the current site to which SCP is connected.
Backup Id	This field displays the ID of the stored backup.
Backup Size (bytes)	This field displays the size of the stored backup.
Creation TimeStamp	This field displays the time recorded when the backup was stored.

4.2.4.2 cnDBTier Backup Status

Perform the following procedure to check the cnDBTier backup status:

- From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier Backup Status** tab.

2. On the cnDBTier Backup Status page, click **Refresh** to view the latest cnDBTier backup status as described in the following table:

Table 4-10 cnDBTier Backup Status

Fields	Description
Current Timestamp	This field displays the current system time.
Is Backup In Progress	This field displays whether any backup is in progress or not.
Next Backup Scheduled Timestamp	This field displays the time for the next scheduled backup.

4.2.4.3 cnDBTier Version

Perform the following procedure to view the version:

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **cnDBTier Version** to view the version.

Table 4-11 cnDBTier Version Attributes

Fields	Description
cnDBTier Version	This field displays the cnDBTier version.
NDB Version	This field displays the network database (NDB) version.

4.2.4.4 Database Statistics Report

Perform the following procedure to view the available database.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **Database Statistics Report** to view the available database.

Table 4-12 Database Statistics Report

Fields	Description
Database Count	This field displays the number of available database.
Database Tables Count	This field displays the available database names and their table count.
Database Name	This field displays the database name.
Table Count	This field displays the table count for each database.
Database Table Rows Count	This field displays the table rows present in each table.

Click on **View** icon available next to the database name to view the **View Database Table Rows Count** screen.

Table 4-13 View Database Table Rows Count

Fields	Description
Database Name	This field displays the database name.
Tables	This field displays the table names and the corresponding rows in each table.
Table Name	This field displays the table name.

Table 4-13 (Cont.) View Database Table Rows Count

Fields	Description
Row Count	This field displays the table rows present in each table.

4.2.4.5 Georeplication Recovery

Perform the following procedure to mark cnDBTier cluster as failed, execute georeplication recovery, and monitor their status:

1. From the left navigation menu, navigate to **SCP** and then click **cnDBTier** tab.
2. Click **Georeplication Recovery** to access the Georeplication Recovery Status of the cnDBTier cluster. This includes options such as Update Cluster As Failed, Start Georeplication Recovery, and Georeplication Recovery Status.
 - Click the **Update Cluster As Failed** to mark the cluster as FAILED. The **Update Cluster As Failed** page is displayed.

Table 4-14 Update Cluster As Failed

Fields	Description
Cluster Names	This field displays a list of cnDBTier clusters that can be marked as failed.
Failed Cluster Names	This field displays a cnDBTier cluster that is marked as failed.

Click **Update Cluster**. The selected cluster name is updated in the **Failed Cluster Names** field.

- Click the **Start Georeplication Recovery** to start the georeplication recovery process for a failed site. The **Start Georeplication Recovery** page is displayed.

Table 4-15 Start Georeplication Recovery

Attribute	Description
Failed Cluster Name	This field displays a list of all the clusters that have been marked as failed.
Backup Cluster Name (Optional)	This field displays a list of all the healthy clusters. If no cluster is selected, the system uses the first available healthy cluster for the backup.

Click **Start Georeplication Recovery** to initiate georeplication recovery.

- Click the **Georeplication Recovery Status** to view the status of georeplication recovery for cnDBTier clusters. The **Georeplication Recovery Status** page is displayed.

Table 4-16 Georeplication Recovery Status

Attribute	Description
Local Cluster Name	This field displays the name of the local cluster.

Table 4-16 (Cont.) Georeplication Recovery Status

Attribute	Description
Georeplication Recover Status Details	This field displays the details of the georeplication recovery status of cnDBTier clusters.
Cluster Name	This field displays the clusters by name.
Georeplication Recovery Status	This field displays the current georeplication recovery status of the corresponding cluster.

The following are the statuses of Georeplication Recovery:

Table 4-17 Georeplication Recovery Status

Georeplication Recovery Status	Description
ACTIVE	The cluster is in a healthy state, and replication is up and running with its respective mate cluster.
REINSTALLED	The cluster enters this state during fatal error recovery when the end user reinstalls the cluster.
STARTDRRESTORE	When Georeplication recovery is started, the cluster will transition into this state.
INITIATEBACKUP	When Georeplication recovery is started, the cluster will identify a healthy cluster for backup initiation and transition into this state.
CHECKBACKUP	When the backup is initiated, the georeplication recovery cluster will monitor the progress of the backup until its completion. If the backup fails, the cluster will restart the backup.
COPY_BACKUP	Upon completion of the backup, the georeplication recovery cluster will request the transfer of the backup from the healthy cluster to the georeplication recovery cluster.
CHECK_BACKUP_COPY	When backup copy is started georeplication recovery cluster will monitor for the backup transfer progress till it's completion and if it's fails the cluster will re-initiates the backup transfer.
BACKUPCOPIED	When the backup copy is started, the georeplication recovery cluster will monitor the progress of the backup transfer until its completion. If the transfer fails, the cluster will restart the backup transfer.
BACKUPEXTRACTED	This state indicates that the backup has been successfully extracted at the georeplication recovery cluster, allowing the restoration of the backup to start.
FAILED	This state is used by end user to mark specific cluster as failed and hence georeplication recovery is essential to recover the cluster. This state can also indicates that georeplication recovery started and the database is restored using the healthy cluster backup.
UNKNOWN	This state is used by the end user to mark a specific cluster as failed, necessitating georeplication recovery for cluster recovery. Additionally, this state can indicate that georeplication recovery has started and the database has been restored using the backup from the healthy cluster.
RECONNECTSQLNODES	This state is used to instruct SQL nodes to be offline during backup restoration to prevent any records from entering the binlog of the georeplication recovery cluster.

Table 4-17 (Cont.) Georeplication Recovery Status

Georeplication Recovery Status	Description
BACKUPRESTORE	This state indicates that the backup, successfully copied from the healthy cluster, is currently being used to restore the georeplication recovery cluster.
RESTORED	When the backup is successfully restored in the georeplication recovery cluster, the cluster will enter this state to start the reestablishment of replication channels.
BINLOGINITIALIZED	This state indicates the start of binlogs for the restoration of replication channels, necessary to start the restore process
RECONFIGURE	When the binlog is restarted, the georeplication recovery cluster will reestablish the replication channels with respect to all its mate clusters.

4.2.4.6 Georeplication Status

Perform the following procedure to view the local site and remote site name to which SCP is connected.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **Georeplication Status** to view the local site and remote site name to which SCP is connected.

Table 4-18 Georeplication Status

Fields	Description
Local Site Name	This field displays the local site name to which SCP is connected.
Remote Site Name	This field displays the remote site name.
Replication Status	This field displays the replication status with corresponding sites.
Seconds Behind Remote Site	This field displays the number of seconds that the last record read by the local site is behind the latest record written by the remote site for all the replication groups.

- a. Click the **View** icon in the **Actions** menu to view the **View Georeplication Status** screen.

Table 4-19 Georeplication Status

Fields	Description
Replication Group Delay	This field displays the number of seconds that the last record read by the local site is behind the latest record written by the remote site for individual replication groups.
Replication Channel Group Id	This field displays the ID of the replication channel group.

- b. Click the **View** icon to view the **Replication Group Delay** attributes.

Table 4-20 View Replication Group Delay

Fields	Description
Channel Details	This field displays the channel details such as Remote Replication IP and Role.
Remote Replication IP	This field displays the IP of the remote replication channel.
Role	This field displays the role of the replication channel IP.

4.2.4.7 Viewing cnDBTier Replication Status

Perform the following procedure to view cnDBTier replication status across all cnDBTier clusters using the CNC Console.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. From the list of cnDBTier features, click **Georeplication Status Across All Sites**.
The system provides a consolidated view of the overall cnDBTier replication status.
3. On the Georeplication Status Across All Sites page, use the following options to view the replication status:

Table 4-21 Georeplication Status Across All Sites

Field and Column Names	Description
Type to Filter	Provides a search option to find the required site.
Site Name	Displays the site name of cnDBTier.
Remote Site Name	Displays the remote site name of cnDBTier.
Status	Displays the replication status between the site and the remote site. It can have the following values: • UP • DOWN • NA
Actions	Provides a consolidated view of the site name, remote site name, and replication status.
Refresh	Refreshes the information displayed on the page.

4.2.4.8 Replication HeartBeat Status

Perform the following procedure to view the connectivity between local site and remote site name to which SCP is connected.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **Replication HeartBeat Status** to view the connectivity between local site and remote site name to which SCP is connected.

Table 4-22 Replication HeartBeat Status Details

Fields	Description
Site Name	This field displays the name of the current site to which SCP is connected.

Table 4-22 (Cont.) Replication HeartBeat Status Details

Fields	Description
HeartBeat Details	This field displays information such as the remote site name, heartbeat status, heartbeat lag, and replication channel group id.
Remote Site Name	This field displays the remote site name.
Heartbeat Status	This field displays the connectivity status with corresponding sites.
Heartbeat Lag	This field displays the delay or latency in seconds it took to synchronize between sites.
Replication Channel Group Id	This field displays the ID of the replication channel group.

4.2.4.9 Local Cluster Status

Perform the following procedure to view the local cluster status for the current site.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **Local Cluster Status** to view the local cluster status for the current site:

Table 4-23 Local Cluster Status

Fields	Description
Cluster Name	This field displays the name of the current cluster to which SCP is connected.
Cluster Status	This field displays the local cluster status for the current site.

4.2.4.10 On Demand Backup

Perform the following procedure to view the available database.

1. From the left navigation pane, click the **SCP** tab, and then click the **cnDBTier** tab.
2. Click the **On Demand Backup** to create a new backup and view the status of initiated on-demand backups.

Table 4-24 On Demand Backup Details

Fields	Description
Site Name	This field displays the name of the current site in which the cnDBTier cluster is deployed.
DR Status	This field displays the disaster recovery status.
Backup Id	This field displays the ID of the stored backup.
Backup Status	This field displays the status of backup.
Transfer Status	The field displays the status of the local transfer.
Remote Transfer Status	The field displays the status of remote transfer.
Initiate Backup	The field displays whether the backup is initiated or not.

- a. Click the **Edit** icon.
The **Edit** On Demand Backup screen appears.

Note

The **Edit** mode is available only for Initiate Backup.

- b. Enable the Initiate Backup option click **Save**.
A confirmation message "Save successfully" appears.
- c. Click the **Cancel** to navigate back to the On Demand Backup screen.
- d. Click the **Refresh** to reload the On Demand Backup screen.

4.2.4.11 cnDBTier Health

Perform the following procedure to view the health status of the microservices:

1. From the left navigation menu, navigate to **SCP** and then click **cnDBTier** tab.
The **cnDBTier** page is displayed.
2. Click **cnDBTier Health** to view the health status of the microservices like replication, backup manager, monitor services, and NDB services.
The **cnDBTier Health** page is displayed.
 - Click the **Backup Manager Health Status** to view the health status of the backup manager.
The **Backup Manager Health Status** page is displayed.

Note

The following APIs are read-only.

Table 4-25 Backup Manager Health Status

Fields	Description
Service Name	This attribute displays the service name of the backup manager microservice.
Service Status	This attribute displays the service status of the backup manager microservice. Possible values are UP and DOWN.
DB Connection Status	This attribute displays the database connection status of the backup manager microservice. Possible values are UP and DOWN.
Overall Backup Manager Service Health	This attribute displays the overall health status of the backup manager microservice. Possible values are UP and DOWN.
Backup Executor Health Status	This attribute displays the following information like node id and DB connection status of the backup executor.
Node Id	This attribute displays the id of the node.
DB Connection Status	This attribute displays the backup executor database connection status with the nodes. Possible values are UP and DOWN.

- Click the **Monitor Health Status** to view the health status of the services.
The **Monitor Health Status** page is displayed.

Note

The following APIs are read-only.

Table 4-26 Monitor Health Status details

Attribute	Description
Service Name	This attribute displays the service name of the monitor microservice.
DB Connection Status	This attribute displays the database connection status of the monitor microservice. Possible values are UP and DOWN.
Metric Scrape Status	This attribute displays the status of the metric scrape, that is if the metrics are fetched or not. If the metrics are fetched then the service is up and vice versa. Possible values are UP and DOWN.
Overall Monitor Service Health	This attribute displays the overall health status of the monitor microservice. Possible values are UP and DOWN.

- Click the **NDB Health Status** to view the health status of the network database. The **NDB Health Status** page is displayed.

Note

The following APIs are read-only.

Table 4-27 NDB Health Status details

Attribute	Description
Local Site Name	This attribute displays the name of the current site. For example, site 1, site 2.
NDB Health Status Details	This attribute displays the health status of the network database like name of the NDB service, status of the service, health status of PVC.
Service Name	This attribute displays the service name. For example, ndbmgmd-0, ndbmtid-0, ndbmyappsqld-1, ndbmysqld-2.
Service Status	This attribute displays the status of the service. Possible values are UP and DOWN.
PVC Health Status	This attribute displays the health status of the PVC. Possible values are UP, DOWN, and NA. Note: This attribute is set to NA when some of the database pods are not connected to the PVC.

- Click the **Replication Health Status** to view the health status of the replication sites. The **Replication Health Status** page is displayed.

Note

The following APIs are read-only.

Table 4-28 Replication Health Status details

Attribute	Description
Local Site Name	This attribute displays the name of the current site (site 1, site 2).
Health Status Details	This attribute displays the health status details of the local site like replication service name, replication service status, database connection status of the replication service, and the overall health status of the replication microservices. The number of rows in this table varies depending on the type of deployment (for example, two-site, three-site deployments).
Service Name	This attribute displays the name of the available replication service.
Service Status	This attribute displays the status of the available replication service. Possible values are UP and DOWN.
DB Connection Status	This attribute displays the database connection status of the replication microservice. Possible values are UP and DOWN.
Overall Replication Service Health	This attribute displays the overall health status of the replication microservice. Possible values are UP and DOWN.

4.2.5 Configuring NRF SRV

Perform the following procedure to configure NRF using DNS SRV Resolution.

1. From the left navigation pane, navigate to **SCP** and click the **NRF SRV Configuration** tab.
2. In the NRF SRV FQDN section, click the **Add** button to create the new NRF SRV configuration for the given NRF SRV FQDN.
You can configure the NRF configurations at run time, and this NRF SRV FQDN shall be mapped to target NRF FQDNs. SCP uses this NRF SRV FQDN to query the DNS SRV server to get the actual target NRF FQDNs. NRF SRV FQDN

Figure 4-28 Add NRF SRV Configuration

The screenshot displays the 'Add NRF SRV Configuration' page. On the left is a sidebar with navigation links: Routing Options, Routing Config Set, Routing Options Configura..., SBI Message Priority, SCP Features, SCP Profile, SCP Service Configurat..., SEPP Info, Service Groups, Topology Source Info, Traffic Feed, Upgrade Status, **NRF SRV Configuration**, SCP Feature Status, and NfinstanceId And Servicel... The main area is titled 'Add NRF SRV Configuration'. It contains several input fields and checkboxes: 'NRF SRV FQDN' (text input), 'NRF SRV Config' (expanded section), 'NF SetId List' (text input), 'Perform Subscription' (checkbox), 'Perform Audit' (checkbox), 'Register Scp' (checkbox), 'ApiPrefix' (text input), 'Scheme' (dropdown menu), and 'PLMN List' (table). The 'PLMN List' table has columns for 'MCC' and 'MNC', and an 'Add' button. Below the table, it says 'No data to display.'

- To configure the NRF SRV, enter the input for the following fields:

Table 4-29 NRF SRV Configuration

Field Name	Description
NF SetId List	This is the SetId list for this NRF SRV configuration. You can configure multiple nfSetIds, but the NRF profile and rule creation will only take into account the nfSetId from the 0th index. This setId must be unique for each NRF SRV configuration; that is, this setId must not be present in any other NRF SRV configuration.
Perform Subscription	This field allows to decide whether NRF from this NRF SRV should be used for a subscription or not. The possible values are true or false.
Perform Audit	This field allows to decide whether NRF from this NRF SRV should be used for a audit or not. The possible values are true or false.
Register SCP	This field allows to decide whether to register SCP with the NRF from the NRF Set. The possible values are true or false.
Scheme	This field is used for the URI Scheme. The supported value is http/https.
PLMN List	This field indicates the list of NRFs serving Public Land Mobile Network (PLMN). A PLMN has a unique PLMN code, which consists of a MCC (Mobile Country Code) and an MNC (Mobile Network Code). Click the Add button to add MCC and MNC, respectively.
Versions	This field lists the NFServiceVersion. Configuring multiple API versions is permissible, but at least one entry in the version list must have its apiVersionInUri set to "v1." This is because SCP currently utilizes "v1" for its self-generated requests towards NRF. - Click the Add button to add NFServiceVersion. - The supported value of apiVersionInUri is v1/v2. - The apiFullVersion should be in format x.y.z., for example, 1.0.0.
apiPrefix	This field is used in the URI while communicating with NRF.

Table 4-29 (Cont.) NRF SRV Configuration

Field Name	Description
serviceNames	Indicates the service name of the NRF SRV configuration. The nnrf-nfm and nnrf-disc are mandatory for NRF SRV configurations. The supported value is nnrf-nfm/nnrf-disc/nnrf-oauth2.
isInterPlmnFqdn	When isInterPLMNfqdn is true, it enables InterPLMN request routing. This means requests coming from foreign PLMNs to the SCP can be routed. SCP will perform intra-PLMN routing to local NRFs based on the interplmnFQDN.


4. In the NRF SRV FQDN section, click the **Edit** icon to update the existing NRF SRV configuration.
5. Click **Save**.

4.2.5.1 Mapping NFInstanceId and ServiceInstanceId

Perform the following procedure to map the NRF FQDN InstanceId.

1. In the left navigation pane, click the **SCP** tab, and then click the **SCP Features** tab.
2. From the SCP Features list, click **NFInstanceId And ServiceInstanceId Mapping**.
3. In the NFInstanceId And ServiceInstanceId Mapping section, click **Get** to retrieve the NRF FQDN and corresponding instanceId mapping details.

Figure 4-29 NFInstanceId And ServiceInstanceId Mapping

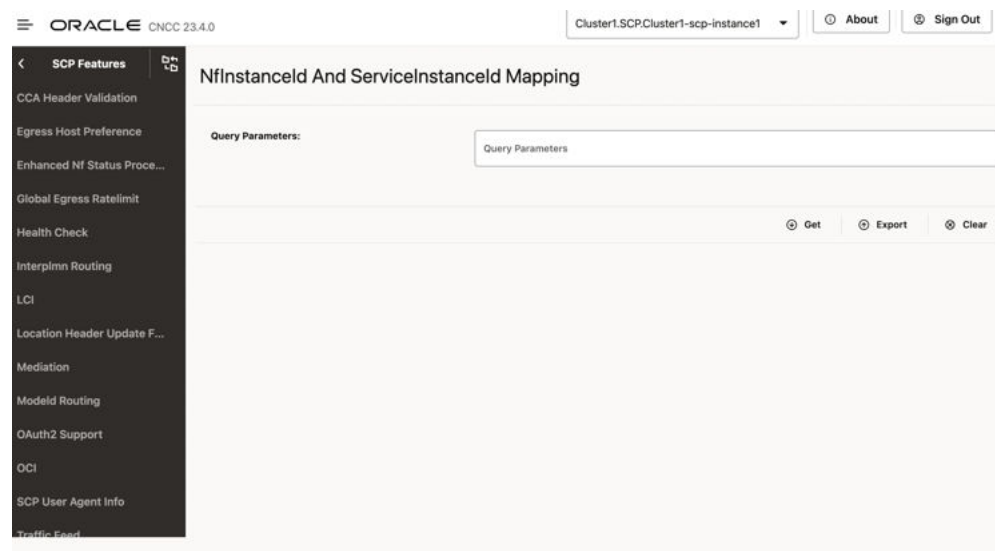

4. To retrieve, export, or clear the data, click the required buttons as described in the following table:

Table 4-30 Buttons and Descriptions of Mapping NRF FQDN InstanceId

Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve and update data required for mapping NRF FQDN InstanceId.

Table 4-30 (Cont.) Buttons and Descriptions of Mapping NRF FQDN InstanceId

Button and Field Names	Description
Get	Retrieves the NRF FQDN and corresponding instanceId mapping details. You can modify this data using the Edit button.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

4.2.6 Configuring NRF

Perform the following procedure to configure NRF preferred by SCP for access token requests.

1. From the left navigation pane, click the SCP tab, and then click the NRF Configuration tab.
2. In the NRF CONFIGURATION section, click **Get** to retrieve NRF configuration information.

Figure 4-30 NRF Configuration

The screenshot displays the 'NRF CONFIGURATION' section of the console. At the top, there's a header 'NRF CONFIGURATION'. Below it, a 'Query Parameters' label is followed by a text input field. To the right of the input field is a toolbar containing four buttons: 'Get' (with a magnifying glass icon), 'Edit' (with a pencil icon), 'Export' (with a download icon), and 'Clear' (with an 'X' icon). Below the toolbar, there are two tabs: 'Response' and 'Request'. The 'Response' tab is active, showing a large, empty rectangular area for displaying data.

3. To edit, export, or clear the data, click the required buttons as described in the following table:

Table 4-31 Button and Field Descriptions of NRF Configuration

Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve, add, and update NRF configuration data.
Get	Retrieves NRF configurations. You can modify this data using the Edit button.
Edit	Modifies any existing data by updating mandatory query parameters in the Query Parameters field.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

Note

This configuration is only applicable to the OAuth service.

4.2.7 Configuring Upgrade and Rollback Event

Perform the following procedure to fetch upgrade and rollback event information.

1. From the left navigation pane, click the **SCP** tab, and then click the **Upgrade Status** tab.
2. On the Upgrade Status page, the following columns display upgrade and rollback events:

Figure 4-31 Upgrade and Rollback Events

Table 4-32 Upgrade and Rollback Events

Column Name	Description
Service Name	Displays the names of the services, such as SCPC-Audit, SCPC-Configuration, SCPC-Notification, and so on.
Event	Displays the names of the upgrade and rollback events, such as Pre_Upgrade_Started, Pre_Upgrade_Completed, Pre_Upgrade_Failed, and so on.
Source Release	Displays the source release version for performing upgrade and rollback. The convention to identify a release is as follows: • 1.12.0 is identified as 101200 • 1.14.0 is identified as 101400
Target Release	Displays the target release version for performing upgrade and rollback. The convention to identify a release is as follows: • 1.15.0 is identified as 101500 • 22.1.0 is identified as 221000
Creation Timestamp	Displays the time of creation of the event, for example, creationTimestamp": "2021-05-26T01:17:15.000+00:00

4.2.8 OAuth2.0 Configurations

This section provides information about configuring access token granularity and requests for NF types or NF service instances.

You must log in to the CNC Console while performing the procedures described in the subsequent subsections. Using these procedures, you can perform the followings tasks:

- Configure access token granularity
- Configure OAuth2.0 Local PLMN

4.2.8.1 Configuring Access Token Granularity

Perform the following procedure to configure access token granularity and access token requests for NFType, specific NF, or NF instance ID.

1. From the left navigation pane, click the SCP tab, and then click the OAuth Services tab.
2. From the left navigation pane, click the **Access Token Granularity Configuration** tab.
3. In the Access Token Granularity Configuration section, click **Get** to retrieve access token granularity configurations data based on the query parameters.

Figure 4-32 Access Token Granularity

Access Token Granularity Configuration

Query Parameters:

Query Parameters

Get Add Edit Delete Export Clear

Response Request

```
{
  "ruleName": "Config1",
  "data": {
    "requesterPimnlds": [
      {
        "mcc": "325",
        "mnc": "13"
      },
      {
        "mcc": "326",
        "mnc": "14"
      }
    ]
  }
}
```

4. To add a new request, click **Add** and enter the request body information in the **Request** field.
5. Click **Submit**.
The request body message appears in the **Response** field.
6. To edit, export, delete, or clear the data, click the required buttons as described in the following table:

Table 4-33 Button and Field Descriptions of Access Token Granularity

Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve, add, and update access token granularity configuration data based on the query parameters.
Get	Retrieves access token granularity configuration data. You can modify this data using the Edit button.
Add	Adds new message requests in the Request field.
Edit	Modifies any existing data by updating mandatory query parameters in the Query Parameters field.
Delete	Removes any message request.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

4.2.8.2 Configuring OAuth2.0 Local PLMN Required

Perform the following procedure to configure local PLMN OAuth2.0.

1. From the left navigation pane, click the SCP tab, and then click the OAuth Services tab.
2. From the left navigation pane, click the OAuth2Required Configuration tab.
3. In the OAuth2Required Configuration section, click **Get** to retrieve OAuth2Required configurations data based on the query parameters.

Figure 4-33 OAuth2Required Configuration

4. To add a new request, click **Add** and enter the request body information in the **Request** field.
5. Click **Submit**.

The request body message appears in the **Response** field.

6. To edit, export, delete, or clear the data, click the required buttons as described in the following table:

Table 4-34 Button and Field Descriptions of OAuth2Required Configuration


Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve, add, and update OAuth2Required configuration data based on the query parameters.
Get	Retrieves OAuth2Required configuration data. You can modify this data using the Edit button.
Add	Adds new message requests in the Request field.
Edit	Modifies any existing data by updating mandatory query parameters in the Query Parameters field.
Delete	Removes any message request.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

4.2.9 Configuring Error Profile

Perform the following procedure to configure different error profiles, which can be used to build "ProblemDetails" sent in the response body to the consumer.


1. From the left navigation pane, click the **SCP** tab, and then click the **Error Profile** tab.

Figure 4-34 Error Profile

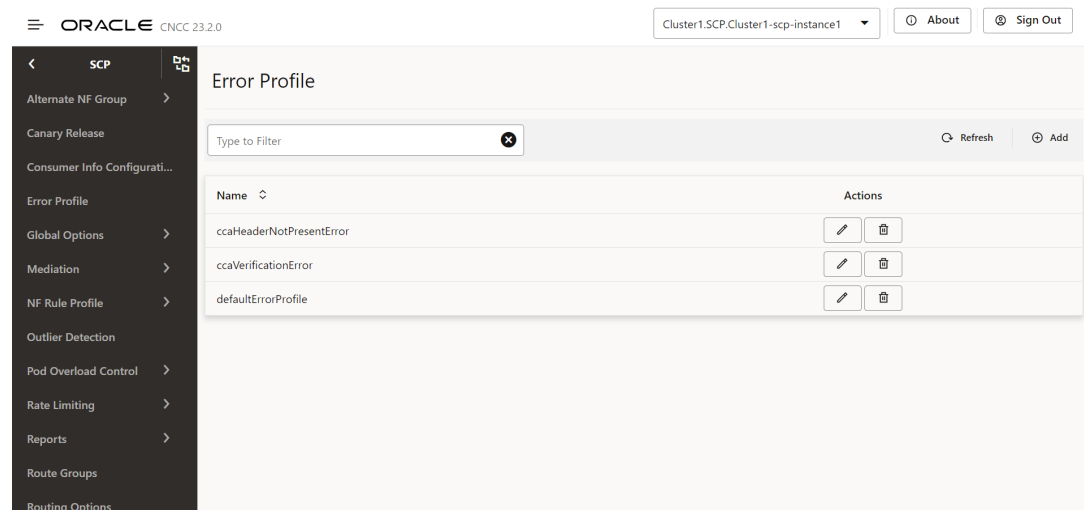

2. Click **Edit** icon from the **Actions** column for the error profiles that must be modified. The **Edit Error Profile** screen appears.

Figure 4-35 Edit Error Profile

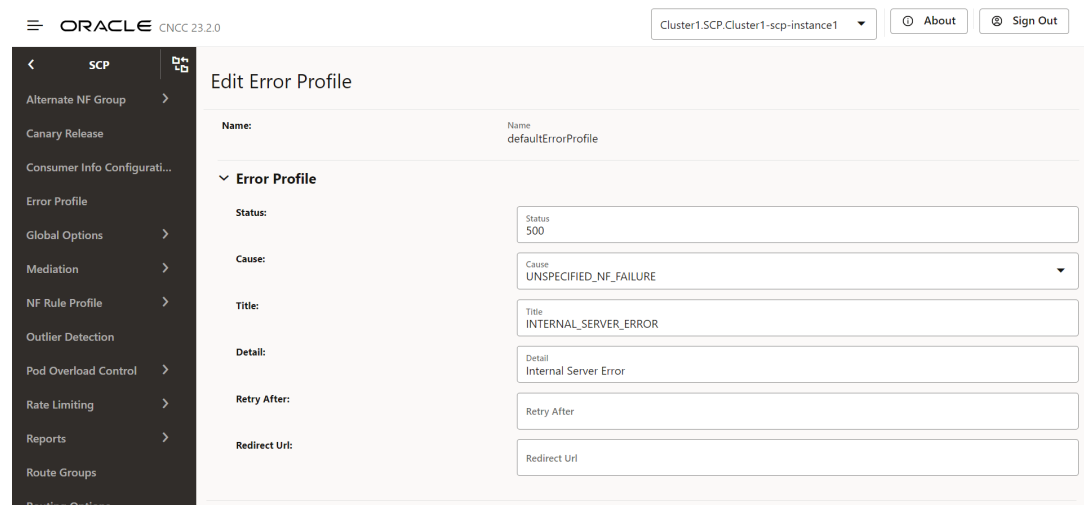

3. If the required cause is not available in the **Cause** drop-down list, select **CUSTOM** to customize the cause:

Figure 4-36 Customize the Cause

The screenshot shows the 'Edit Error Profile' interface in the CNC Console. The left sidebar contains a navigation menu with the following items: SCP, Alternate NF Group, Canary Release, Consumer Info Configurati..., Error Profile (selected), Global Options, Mediation, NF Rule Profile, Outlier Detection, Pod Overload Control, Rate Limiting, Reports, Route Groups, and Routing Options. The main content area is titled 'Edit Error Profile' and shows the configuration for the 'defaultErrorProfile'. The 'Error Profile' section is expanded, revealing several input fields: 'Status' is set to 500; 'Cause' is set to 'CUSTOM'; 'Custom Cause' is 'Custom Cause'; 'Title' is 'INTERNAL_SERVER_ERROR'; 'Detail' is 'Internal Server Error'; 'Retry After' is empty; and 'Redirect Url' is empty. A 'Required' label is visible next to the 'Custom Cause' field.

4. Make the required modifications for the following parameters:

Table 4-35 Edit Error Profile

Field	Description
Status	HTTP Status Code
Cause	The list of error causes that are specific to the occurrence of the problem.
Custom Cause	User defined custom cause. This field will be used only if cause field value is set to "CUSTOM".
Title	If this field is null, a standard HTTP status code description is added.
Detail	If present, the same data is used; otherwise, the application can add it optionally.
Retry After	Indicates the number of seconds after client should retry.
Redirect URL	Indicates the AbsoluteURL of the resource to which the message is redirected to.

For information about configuring error profiles, see "Configuring Error Profile" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

5. Click **Save**.

4.2.10 Configuring Canary Release

Following is the procedure to configure Canary Release parameters:

1. From the left navigation menu, navigate to **SCP** and then select **Canary Release**.
2. Click **Edit** from the **Actions** column for the required service that must be modified. The **Edit Canary Release** Screen appears.

Figure 4-37 Canary Release

SCP

Canary Release

Global Options

Mediation

Message Priority

NF Rule Profile

Rate Limiting

Reports

Routing Options

SCP Profile

Service Groups

Topology Source Info

Canary Release

Type to Filter

Refresh

Service Name	Canary Release Flag	API Full Version	Canary Traffic (%)	Actions
n5g-eir-eic	false	2.0.0	5	
namf-comm	false	2.0.0	5	
namf-evts	false	2.0.0	5	
namf-loc	false	2.0.0	5	
namf-mt	false	2.0.0	5	
nausf-auth	false	2.0.0	5	
nausf-someaction	false	2.0.0	5	

3. Make the required modifications for the following parameters:
- a. **Canary Release Flag:** Enable/Disable the flag using toggle.

b. **API Release Version:** Provide the release version of the API.

c. **Canary Traffic:** Set the value for the traffic that should be distributed to Canary Release.

Figure 4-38 Edit Canary Release

7.0

AboutSign Out

Edit Canary Release

Help

Service Name:

Service Name

n5g-eir-eic

Canary Release Flag:

☐

API Full Version:

API Full Version

2.0.0

Canary Traffic (%):

Canary Traffic (%)

5

Save

Cancel

For more information about the configuration parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

4. Click **Save**.
5. Click **Refresh** to view the updated values on the screen.

4.2.11 Configuring Global Options

Perform the following procedure to configure global options.

Logging Config


1. From the left navigation pane, click the **SCP** tab, and then click the **Global Options** tab.
2. From the **Global Options** list in the left navigation pane, click the **Logging Config** tab.
3. In the **Logging Config** section, click **Edit**.
4. From the **Service Type** drop-down list, select any one of the following service type:
 - **scpc-audit**
 - **scpc-alternate-resolution**
 - **scpc-subscription**
 - **scpc-configuration**
 - **scpc-notification**
 - **scp-worker**
 - **scp-nrfproxy**
 - **scp-cache**
 - **scp-loadmanager**
5. From the **Application Log Level** drop-down list, select the required log level. The description of each logging level is as follows:

Table 4-36 Logging Level

Logging Level	Description
DEBUG	A log level used for events considered to be useful during software debugging when more granular information is required.
INFO	The standard log level indicating that something happened, the application entered a certain state, and so on.
WARN	Indicates that something unexpected happened in the application, a problem, or a situation that might disturb one of the processes. But that doesn't mean that the application has failed. The WARN level should be used in situations that are unexpected, but the code can continue the work.
ERROR	The log level that should be used when the application reaches an issue preventing one or more functionalities from properly functioning.
TRACE	The TRACE log level captures all the details about the behavior of the application. It is mostly diagnostic and is more granular and finer than DEBUG log level. Note: The scpc-notification, scpc-audit, and scpc-loadmanager microservices supports the TRACE log level.

For instance, when you select "scpc-notification" as the service type from the **Service** drop-down list, the **Application Log Level** drop-down list will display the "TRACE" log level.

Figure 4-39 TRACE Log Level

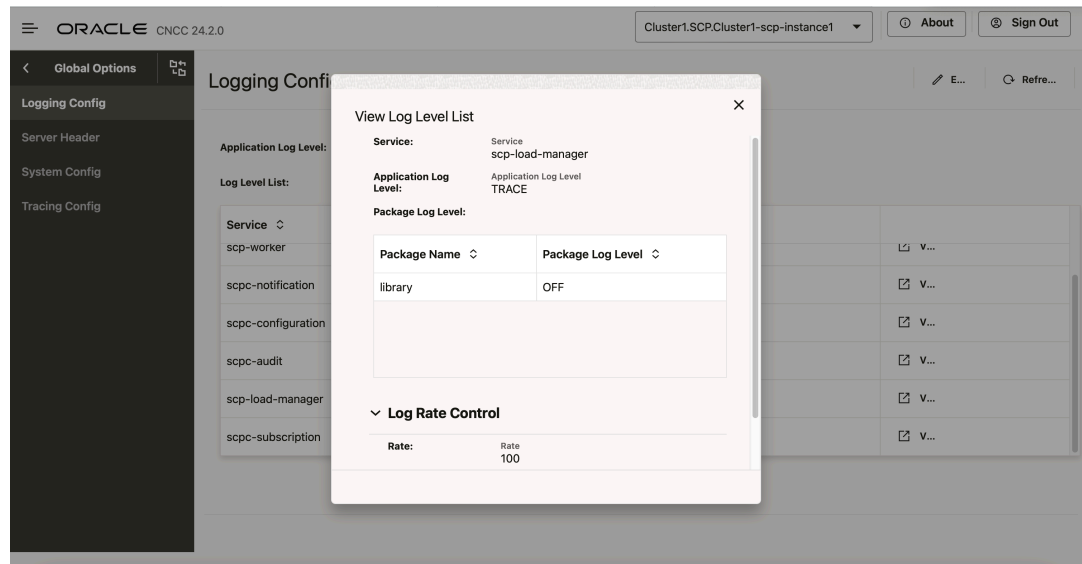

6. Click **Add** under the **Package Log Level** section to specify the name of the package and its log level.
7. In the **Log Rate Control** section, configure the following fields:
 - **Rate**: Enter the log rate.
 - **Log Level**: Select the required log level.
8. Click **Save**.

Note

You can also edit and delete the packages under **Package Log Level**.

System Config

Perform the following procedure to edit the system config parameters.

1. From the **Global Options** list in the left navigation pane, click the **System Config** tab.
2. In the **System Config** section, click **Edit**.
3. In the **Service Status** section, configure the following fields to set the service status of SCP:

Note

Ensure that **Forward Nf Discovery Headers** is set to true to forward discovery headers to Next hop SCP as part of the Model D Indirect 5G SBI Communication feature.
The default value is true.

Table 4-37 Configuring System Config

Field Name	REST API Message Body Parameter	Description
Service Status	scpServiceStatus.serviceStatus	Indicates service state of SCP. Default value: inService Range: - inService: SCP is registered with NRF with nfStatus set to REGISTERED. Heartbeats, subscriptions, and audits are active. The service routes Service Based Interface (SBI) and internal requests. - suspended: SCP remains registered with NRF with nfStatus set to SUSPENDED and remains subscribed to NRF. Heartbeats are stopped, and audits continue. The service rejects Service Based Interface (SBI) traffic after trafficRejectionDelay, except NF Profile Notification traffic from NRF to SCP. The service continues to route internal requests. The health check returns a failure response. - deregistered: SCP deregisters from NRF and unsubscribes from NRF subscriptions. Heartbeats and audits are stopped. Existing Service Based Interface (SBI) and internal request routing continue to use the current routing rules. - outOfService: SCP deregisters from NRF and unsubscribes from NRF subscriptions. Heartbeats and audits are stopped. The service rejects Service Based Interface (SBI) traffic after trafficRejectionDelay. The service continues to route internal requests. The health check returns a failure response.
Traffic Rejection Error Profile	scpServiceStatus.trafficRejectionErrorProfile	Indicates the error profiles that SCP uses while rejecting SBI traffic in the traffic rejection state, for example, suspended and outOfService states.
Vendor Specific IE In Error Response	scpServiceStatus.vendorVendorSpecificIEInErrorRsp	When SCP is in an SBI traffic rejection state, it can insert a vendor-specific IE, that is, vendorSpecific-000323, in the error response body sent to the request sender. When this parameter is set to true, SCP includes the vendor-specific IE in the response sent to the consumer NF. Otherwise, it does not include the vendor-specific IE. In inter-SCP cases, the producer SCP (SCP-P) always includes the vendor-specific IE in traffic rejection responses sent to the consumer SCP (SCP-C) when SCP-P is in a traffic rejection state. When SCP-C forwards that error response to the consumer NF, this parameter determines whether to forward the vendor-specific IE.
Traffic Rejection Delay	scpServiceStatus.trafficRejectionDelay	When the service state of SCP changes to a traffic rejection state, SCP waits for the duration specified in this field before it starts rejecting traffic. This buffer time allows other NFs to become aware of SCP's state change through SCP NF profile update event received from NRF.

Table 4-37 (Cont.) Configuring System Config

Field Name	REST API Message Body Parameter	Description
Next Hop Proxy OD Config	nextHopProxyODConfig	Indicates the Outlier Detection configuration for next hop proxy based on nfType. Click one of the following options: Add: To add a new next hop proxy outlier detection configuration. Edit: To modify an existing configuration. Delete: To remove an existing configuration. To configure a new next hop proxy outlier detection, set these fields: NF Type: Indicates next hop proxy Outlier Detection configuration NFType for which the Outlier Detection configuration is defined. OD Enabled: Enables or disables Outlier Detection for next hop proxy. OD Rule Name: Indicates the name of the rule holding the configuration of Outlier Detection for next hop proxy. Based on the configuration under this rule, Outlier Detection for next hop proxy works. ODH Enabled: Controls whether SCP-C component participates in the Outlier Detection header exchange with SCP-P.
Next Hop Roaming Proxy OD Config	nextHopRoamingProxyODConfig	Indicates the Outlier Detection configuration for next hop roaming proxy based on nfType. Click one of the following options: Add: To add a new next hop roaming proxy outlier detection configuration. Edit: To modify an existing configuration. Delete: To remove an existing configuration. To configure a new next hop roaming proxy outlier detection, set these fields: NF Type: Indicates next hop roaming proxy Outlier Detection configuration NFType for which the Outlier Detection configuration is defined. OD Enabled: Enables or disables Outlier Detection for next hop roaming proxy. OD Rule Name: Indicates the name of the rule holding the configuration of Outlier Detection for next hop roaming proxy. Based on the configuration under this rule, Outlier Detection for next hop roaming proxy works.
Next Hop Proxy CB Config	nextHopProxyCBConfig	Indicates Circuit Breaking configuration for next hop proxy based on nfType. Click one of the following options: Add: To add a new next hop proxy Circuit Breaking configuration. Edit: To modify an existing configuration. Delete: To remove an existing configuration. To configure a new next hop Circuit Breaking configuration, set these fields: NF Type: Indicates proxy or roaming proxy NFType for which Circuit Breaking configuration is defined. CB Enabled: Enable or disables Circuit Breaking for next hop proxy or next hop roaming proxy. CB Rule Name: Indicates the name of the rule holding the configuration of Circuit Breaking for next hop proxy or next hop roaming proxy. Based on the configuration under this rule, Circuit Breaking for next hop proxy or next hop roaming proxy works.

Table 4-37 (Cont.) Configuring System Config

Field Name	REST API Message Body Parameter	Description
Next Hop Roaming Proxy CB Config	nextHopRoamingProxyCBConfig	Indicates Circuit Breaking configuration for next hop roaming proxy based on nfType. Click one of the following options: Add: To add a new next hop roaming proxy Circuit Breaking configuration. Edit: To modify an existing configuration. Delete: To remove an existing configuration. To configure a new next hop roaming proxy Circuit Breaking configuration, set these fields: NF Type: Indicates proxy or roaming proxy NFType for which Circuit Breaking configuration is defined. CB Enabled: Enable or disables Circuit Breaking for next hop proxy or next hop roaming proxy. CB Rule Name: Indicates the name of the rule holding the configuration of Circuit Breaking for next hop proxy or next hop roaming proxy. Based on the configuration under this rule, Circuit Breaking for next hop proxy or next hop roaming proxy works.
Forward Nf Discovery Headers	forwardNfDiscoveryHeaders	Enables or disables the forwarding of discovery headers to next hop SCP.
viaHeader Check Enabled	viaHeaderCheckEnabled	The relevance of this parameter arises when the 3gpp-Sbi-Target-apiRoot value contains a PLMN ID that is local to SCP.
interPlmnFqdn Validation Enabled	interPlmnFqdnValidationEnabled	The relevance of this field arises when viaHeader Check Enabled is disabled or the viaHeader is not present in the incoming request, and the 3gpp-Sbi-Target-apiRoot value contains a PLMN ID that is local to SCP.
TTL	ttl	Indicates the duration in which the DNS record is valid. This is used by the DNS SRV feature to refresh the DNS SRV record.
DnsQueryTimeout	dnsQueryTimeout	The maximum amount of time in milliseconds to wait for a response during a DNS SRV query.
Idle Timeout	trafficPolicy.connectionPool.http.idleTimeout	The idle timeout for upstream connection pool connections. The idle timeout is defined as the period in which there are no active requests. If not set, there is no idle timeout. When the idle timeout is reached the connection will be closed. Note that request based timeouts mean that HTTPS/2 PINGS will not keep the connection alive.
Idle Timeout	trafficPolicy.connectionPool.https.idleTimeout	The idle timeout for upstream connection pool connections is defined as the period in which there are no active requests. If not set, there is no idle timeout. When the idle timeout is reached, the connection will be closed. Note that request-based timeouts mean that HTTP/2 PINGS will not keep the connection alive.
Connection Timeout	trafficPolicy.connectionPool.tcp.connectionTimeout	Specifies the TCP connection timeout for upstream connection pool connections. The valid units are milliseconds and seconds. A value of 0 indicates an infinite connection timeout or disables the connection timeout.
Enable	trafficPolicy.connectionPool.tcp.tcpKeepalive.enable	Enables or disables tcp keepalive for upstream connections.
Interval	trafficPolicy.connectionPool.tcp.tcpKeepalive.interval	The time duration between keep-alive probes. The valid time unit is seconds. For example: 1s The default value is 1 second, minimum value is 1 second, and maximum value is 120 seconds.

Table 4-37 (Cont.) Configuring System Config

Field Name	REST API Message Body Parameter	Description
Probes	trafficPolicy.connectionPool.tcp.tcpKeepalive.probes	Maximum number of keepalive probes to send without response before deciding the connection is dead. For example: 9
Time	trafficPolicy.connectionPool.tcp.tcpKeepalive.time	The time duration a connection needs to be idle before keep-alive probes are sent. The valid time unit is second. For example: 180s The default value is 180 seconds, minimum value is 1 second, and maximum value is 7200 seconds.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

For more information about the above mentioned fields, see "Configuring System Options" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

4. Click **Save** after modifying the values of different fields.

Tracing Config

Perform the following procedure to edit tracing config options.

1. From the **Global Options** list in the left navigation pane, click the **Tracing Config** tab.
2. In the **Tracing Config** section, click **Edit** to enable or update tracing for an SCP service.
3. Enable the following options as required:
 - **Tracing Enabled**
 - **Message JSON Body Enabled**

For information about tracing parameters, see "Updating HELM Configurable Parameters with REST APIs" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

4. Click **Save**.

4.2.12 Mediation Configuration

This section outlines procedures for setting up trigger points to define filter criteria, configuring routing options, creating mediation rules, adjusting log levels, and defining user variables.

4.2.12.1 Configuring Mediation Trigger Point

Perform the following procedure to configure trigger points for defining the filter criteria for a message to decide whether to invoke mediation or not.

Note

For each trigger point configuration, the combination of `NfType`, `serviceName`, `httpMethods`, `messageType` and `triggerPoints` methods must be unique. No new records can be added with the same combination.

1. From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
2. To configure trigger points for defining the filter criteria for a message, in the left navigation pane, click the **Trigger Points** tab.
3. In the Trigger Points section, click **Add**.
4. In the Add Trigger Points section and add the fields as described in the following table:

Table 4-38 Trigger Points Field Description

Field	Description
Group Id	Enter the group ID for which the mediation configuration is required. The Mediation configuration for a specific group is applicable to the mediation requests or responses received only from the same group. The HTTP Mediation service consumer NFs, which requires the same mediation rules, can be grouped together using this group ID.
Rule Name	Enter a unique rule name for each mediation configuration, which will serve as the primary key.
Message Type	Select whether the message is a notification or a service request. The allowed message types are svc-request-message, notification-message, or both notification-message, svc-request-message.
Service Name	Select the service of NFType for which mediation configuration is required.
NF Type	Select the NFType for which mediation configuration is required.
Http Methods	Select the HTTP methods, such as GET, POST, PUT, PATCH, DELETE, and OPTIONS.
Mediation Trigger Points	Select trigger points to be enabled based on matches with one or more of the following: requestIngress, requestEgress, responseIngress, and responseEgress.
Match	Indicates the list of match blocks to be satisfied for the rule to be activated. Minimum number of blocks = 1 Maximum number of blocks = 20
Add	Option to add HTTP headers, JSON body, and User Defined Variables criteria.

Match Parameter Semantics

- **Match Blocks using OR Semantics:**
The match wrapper consists of multiple match blocks, which are evaluated using **OR semantics**. This means that for the overall match wrapper to evaluate to true, it is sufficient for any one match block to satisfy the conditions.

For example, if the match wrapper contains three match blocks, the entire wrapper will be considered a match as long as at least one of the blocks matches the conditions.
- **Internal Components of a Match Block (AND Semantics)**
Each match block contains three components:
 - **Body:** A list of match conditions for body fields.
 - **Headers:** A list of match conditions for headers.
 - **userDefinedVariables (UDVs):** A list of match conditions for user-defined variables.

These components are evaluated using AND semantics:

 - All conditions within each component (for example, all body conditions, all header conditions, and all UDV conditions) must be satisfied.
 - Furthermore, all three components (body, headers, and userDefinedVariables) must match in order for the block to be considered a match.

5. In the Match section, click **Add**.
The Add Match dialog box appears.

6. In the Header section, click **Add** to set the header details as follows:
 - **Name:** Enter a name for the header.
 - **Value:** Enter a value of the header.
 - **Match Type:** Select a range type from the **Match Type** drop-down.
7. In the Body section, click **Add** to set the JSON body details as follows:
 - **Name:** Enter a name for the body.
 - **Value:** Enter a value for the header.
 - **Match Type:** Select a range type from the **Match Type** drop-down.
8. In the User Defined Variables section, click **Add** to set the user defined variable details as follows:
 - **Name:** Select the user-defined variable names from the **Name** drop-down.
 - **Value:** Enter a value for the header.
 - **Match Type:** Select a range type from the **Match Type** drop-down.
 - In the Range section, if the header type has a numeric value, enter the range of that value in **Start** and **End** fields.
 - Click **Remove** to discard the changes made to the Range section.
9. In the Action section, select the action type from the **Action Type** drop-down. This field allows you to select the action for the trigger point rules that match the configured trigger point rules setup. The allowed values are `forwardToMediationService` and `setTriggerPointsInvocation`.

The significance of `setTriggerPointsInvocation` is to avoid extra SCP-Worker to mediation service hop at `requestIngress` or `requestEgress` trigger points for the scenarios where response message mediation is required based on request message content.

For more information, see the "Configuring Mediation Trigger Point" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
10. In the **Trigger Point List**, select the list of trigger points to be invoked for matching the configured trigger point rule.

For more information about the order of invocation, see the "Configuring Mediation Trigger Point" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Note

This is only applicable for Action Type = `setTriggerPointsInvocation`. Additionally, the first value in the `triggerPointList` should not precede the first value in the parent `triggerPoints`.

Example (not allowed) `triggerPoints`: `["requestEgress"], "action": { "actionType": "setTriggerPointsInvocation", "triggerPointList": [ "requestIngress" ] }`

In this example, `"requestIngress"` is listed after `"requestEgress"`, which violates the rule that the first trigger point in the `triggerPointList` should not occur before the first trigger point in the parent `triggerPoints`.

11. In the Trigger Points section, click **Edit** and configure the fields as required.

Figure 4-40 Edit Mediation Trigger Points

12. Click **Save** to save the changes.
13. Click **Cancel** to reset all the fields.

4.2.12.2 Configuring Routing Options for Mediation

Perform this procedure to configure routing options with Mediation.

1. From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
2. On Mediation tab, click the **Routing Options** subtab.
3. In the Routing Options section, click **Edit**.

The Edit Routing Options screen appears.

Figure 4-41 Editing Routing Options

Status Code	Action	
DEFAULT	continue_processing	Edit Delete
MSGDCODEFAILURE	continue_processing	Edit Delete
MAXHRSIZEEXCEEDED	continue_processing	Edit Delete

4. In the Edit Routing Options section, set **Retry** to true to enable retry attempt.
5. In the **Max Retry Attempts** field, enter a value to set the number of retry attempts. Minimum value is 1, Maximum value is 10.
6. In the **Response Timeout** field, enter a time interval to respond to a message request. This value must be in seconds.

7. In the Exception Error Responses section, click **Add** to add exception error responses.

This option enables you to send an error message to the consumer NF or process the message request to the producer NF when the Mediation service is unavailable. This option specifies how exceptions should be handled. In the Exception Error Responses of Routing Options, three exception configurations will be created by default during deployment. These configurations will include the status codes DEFAULT, MSGDECODEFAILURE, and MAXHDRSIZEEXCEEDED, with the action set to continue_processing. This means that if an exception occurs during mediation invocation, the process will continue. To change this behavior, the user must create their own exception configuration by specifying actions for specific status codes.

8. In the Add Exception Error Responses dialog box, configure the fields as described in the following table:

Table 4-39 Add Exception Error Responses

Field	Description
Status Code	Indicates the list of status codes that matches with the status code received from the application, the required action specified by action field is taken. This value can be any HTTP Status Codes, HTTP Status with other defined custom status (RESPONSE_TIMEOUT and CONNECTION_FAILURE)
Action	Indicates the action to be taken when the above mentioned status code is received. It can have the following values: • send_error_response: Sends the error code to the consumer NF. • continue_processing: Continues processing the message in case of errors.
Error Code	Indicates configurable error codes to be sent by SCP to consumer NFs. It is a valid HTTP status code or allowed custom code.
Error Cause	Indicates the error cause that is specific to the occurrence of the problem.
Error Title	Indicates the title of the error.
Error Description	Indicates an explanation specific to the occurrence of the problem.
Retry After	Indicates the retry interval.
Redirect Url	Indicates the AbsoluteURL of the resource to which the message is redirected to.


9. Click **Save**.

4.2.12.3 Configuring Mediation Rules

Perform this procedure to configure mediation rules.

1. From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
2. On Mediation tab, click the **Mediation Rules Configuration** subtab.

The Mediation Rules Configuration screen with a list of rules saved in database appears.

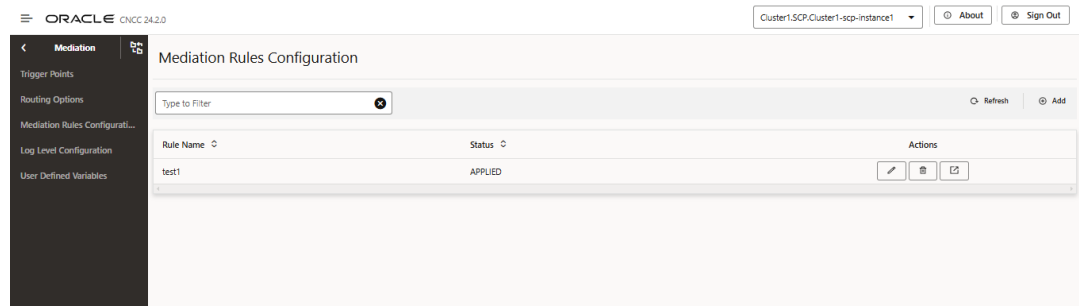Figure 4-42 Mediation Rules Configuration

3. Click the **View** icon to view the mediation rules.
4. Click the **Add** to create a mediation rule.

The Add Mediation Rule screen allows you to configure the fields to create new rules as described in the following table:

Table 4-40 Add Mediation Rules

Field	Description
Rule Name	Indicates the name of the rule. This value should be unique.
Format	Indicates the Format in which the rules are defined, such as DRL.
Status	Indicates the status of the rule. It can have the following values: • DRAFT • APPLIED The status must always be in DRAFT to create a new rule.
Mediation Mode	Indicated whether the rule applies to mediation active or mediation test. • Mediation Active allows actual messages to be manipulated according to configured mediation rules. • Mediation Test executes the mediation rule on message copy instead of the actual message and verifies the behavior of the mediation rule.
Code	Indicates the configurable drool expression that matches the request/response headers and body sent by SCP. For example, <pre>package com.oracle.cgbu.ocmediation.nfmediation; import com.oracle.cgbu.ocmediation.factdetails.Request; dialect "mvel" rule "newRuleTest" when req : Request(headers.has("header") == true) then req.headers.add("NewHeader", "132465") end</pre>
State	Indicates the state. The value of State must be SAVE to create a new rule. For more information, see Table 3-44

Note

Special characters are not supported and can lead to a compilation error.

- Click the **Edit** icon to edit the existing rule.

Add a Mediation Rule with user-defined variables that have not been configured.

Note

User-defined variables must be configured before they can be used in a mediation rule.

The Edit Mediation Rule screen allows you to configure the fields as described in the following table:

Table 4-41 Edit Mediation Rules

Field	Description
Rule Name	Indicates the name of the rule. This value should be unique.
Format	Indicates the Format in which the rules are defined, such as DRL.
Status	Indicates the status of the rule. It can have the following values: - DRAFT - APPLIED The following fields are allowed to be modified in DRAFT status: Mediation Mode , Code , and State . The valid values for state are SAVE, CLONE, COMPILE, and APPLY. The Mediation Mode can only be modified in APPLIED status. The valid values for state are SAVE, CLONE, or DRAFT.
Mediation Mode	Indicated whether the rule applies to mediation active or mediation test. - Mediation Active allows actual messages to be manipulated according to configured mediation rules. - Mediation Test executes the mediation rule on message copy instead of the actual message and verifies the behavior of the mediation rule.
Code	Indicates the configurable drool expression that matches the request/response headers and body sent by SCP.
State	Indicates the action to be applied to the rule. The default value is SAVE Note: The DRAFT state is an invalid transition that could lead to an error.
New Rule Name	Indicates the new name of the rule. This field appears when a CLONE state is selected.

Note

If the User Defined Variables field is not enabled, rules using userDefinedVariables can only be saved in a DRAFT state and cannot be moved to the COMPILE or APPLY state.

- Click the **Delete** icon to delete the existing rule.

The status of the rule must always be in DRAFT to delete an existing rule.

7. Click **Save**.

4.2.12.4 Configuring Mediation Log Levels

Perform this procedure to configure the log levels of mediation.

1. From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
2. On Mediation tab, click the **Log Level Configuration** subtab.
The Log Level Configuration screen with a list of default log level type of mediation and mediation-test service assigned during deployment appears.
3. Click the **View** icon to view the log level of mediation or mediation test service.
4. Click the **Edit** icon to edit or update the log level of mediation or mediation test service.
The Edit Log Level Configuration screen allows you to configure the fields as described in the following table:

Table 4-42 Edit Log Level Configuration

Field	Description
Service Type	Indicates the name of the type of service. For examples, mediation and mediation-test
Application Log Level	Indicates the type of log level. The following are the supported log levels: • WARN: Designates potentially harmful situations. • INFO: Designates informational messages that highlight the progress of the application at coarse-grained level. • ERROR: Designates error events that might still allow the application to continue running. • DEBUG: Designates fine-grained informational events that are most useful to debug an application. The default value is WARN .
Package Log Level	Indicates the package level log information.
Log Rate Control	Indicates the log rate control information.

5. Select the application log level from the **Application Log Level** drop-down list to collect the logs as per the requirement.
6. Click **Save** to update the log level of service.

Package Log level Configuration

To update the package level information, perform the following:

1. On the Package Log level section, click the **EDIT** icon next to the package name.
The Edit Package Log Level screen allows you to configure the fields as described in the following table:

Table 4-43 Edit Package Log Level

Field	Description
Package Name	Indicates the name of the package. It should be a valid library name. • The valid package names are org, io, springfox, com.zaxxer, reactor, validator, and library. • The default package name is library.

Table 4-43 (Cont.) Edit Package Log Level

Field	Description
Package Log Level	Indicates the type of package log level. The following are the supported log levels: • WARN: Designates potentially harmful situations. • INFO: Designates informational messages that highlight the progress of the application at a coarse-grained level. • ERROR: Designates error events that might still allow the application to continue running. • DEBUG: Designates fine-grained informational events that are most useful to debug an application • OFF: Disables the log rate. The default value is OFF

2. Edit the package name and Package Log Level from the drop-down menu and click **Save**.

Log Rate Control Configuration

To configure the average number of logs allowed per second, perform the following:

1. The Log Rate Control section allows you to configure the fields as described in the following table:

Table 4-44 Log Rate Control


Field	Description
Rate	Indicates the average number of logs allowed per second. • The default rate is 1. • The range is in between 1 and 10000
Log Level	Indicates the type of log level where rate control is applied. The following are the supported log levels: • WARN: Designates potentially harmful situations. • INFO: Designates informational messages that highlight the progress of the application at a coarse-grained level. • ERROR: Designates error events that might still allow the application to continue running. • DEBUG: Designates fine-grained informational events that are most useful to debug an application • OFF: Designates to turn off logging. The default value is OFF

2. Select the log level from the **Log Level** drop-down to change the log level type, and click **Save**.

4.2.12.5 Configuring Mediation Support for User Defined Variables

Perform this procedure to configure the user defined variables of mediation.

1. From the left navigation pane, click the **SCP** tab, and then click the **Mediation** tab.
2. On Mediation tab, click the **User Defined Variables** subtab.
The **User Defined Variables** screen displays a list of user-defined variables saved in the database. A user-defined variable can be edited, deleted, or viewed.

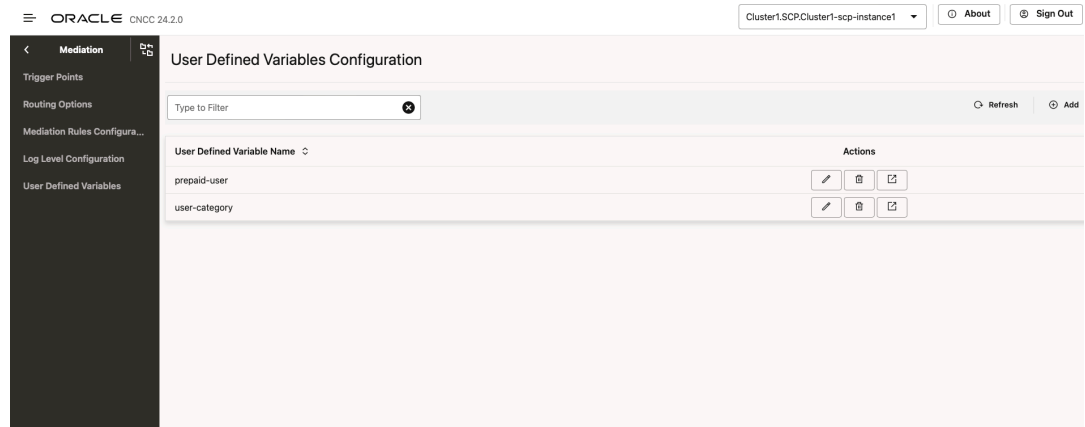Figure 4-43 User Defined Variables Configuration

3. Click the **View** icon to view the configured user-defined variable.
4. Click the **Add** to create a user-defined variable.
The Add User Defined Variable screen allows you to configure the fields to create user defined variables to configure rules as described in the following table:

Table 4-45 Add User Defined Variable

Field	Description
User Defined Variable Name	This field is used to specify the name of the user-defined variable. Ensure the name is unique.
Data	This section allows to define and configure user-defined variable data-related settings.
Type	This field is used to specify the data type (for example, STRING, LONG, JSON, BOOLEAN).
Size	This field is used to define the size limit for the user-defined variable data. This field is conditional and required only when the type is STRING or JSON. The allowed size range is between 1 and 1024 bytes only.
Description	This field is used to provide a brief explanation for the data being defined.

Note

Ensure that no special characters are used.

5. Click the **Edit** icon to edit the configured user-defined variable.
The Edit User Defined Variable screen allows you to configure the fields as described in the following table:

Table 4-46 Edit User Defined Variable

Field	Description
User Defined Variable Name	This field specifies the name of the user-defined variable. Note: The name of the user-defined variable cannot be edited.
Data	This section allows users to define and configure user-defined variable data-related settings.
Type	This field specifies the data type (for example, STRING, LONG, JSON, BOOLEAN).
Size	This field is used to define the size limit for the data. This field is conditional and required only when the type is STRING or JSON. The allowed size range is between 1 and 1024 bytes only.

Table 4-46 (Cont.) Edit User Defined Variable

Field	Description
Description	This field provides a brief explanation for the data being defined.

Note

If a user-defined variable is **APPLIED** in any rules or configured at trigger points, it cannot be deleted. In this case, the only editable field is the **size**, which can only be incremented.

6. Click **Save** to update changes.
Users can use these user-defined variables in SCP trigger points and mediation rules.

4.2.13 Configuring NF Profile

Perform the following procedure to configure NF profiles.

1. From the left navigation pane, click the **SCP** tab, and then click the **NF Profile Configuration** tab.
2. To retrieve NRF topology information using query parameters, do the following:
 - a. From the left navigation pane, click the **NRF NF Topology** tab.
 - b. In the **NRF NF Topology** section, click **Get** to retrieve NRF topology configuration data based on the query parameters.
The request body message appears in the **Response** field.

To retrieve, delete, export, or clear the data, click the required buttons as described in the following table:

Table 4-47 Button and Field Descriptions

Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve, add, and update NRF topology configuration data based on the query parameters.
Get	Retrieves NRF topology configuration data.
Delete	Removes any message request.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

3. To retrieve and add NF topology information using query parameters, do the following:
 - a. From the left navigation pane, click the **LOCAL NF Topology Config** tab.
 - b. In the **LOCAL NF Topology Config** section, to add a new request, click **Add** and enter the request body information in the **Request** field.
 - c. Click **Submit**.
The request body message appears in the **Response** field.

To edit, export, delete, or clear the data, click the required buttons as described in the following table:

Table 4-48 Button and Field Descriptions

Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve, add, and update local NF topology configuration data based on the query parameters.
Get	Retrieves NF topology configuration data. You can modify this data using the Edit button.
Add	Adds new message requests in the Request field.
Edit	Modifies any existing data by updating mandatory query parameters in the Query Parameters field.
Delete	Removes any message request.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

4. To retrieve NF profile information using query parameters, do the following:
 - a. From the left navigation pane, click the **Retrieve NF Profiles** tab.
 - b. In the **Retrieve NF Profiles** section, click **Get** to retrieve NF profile configuration data based on the query parameters.
The request body message appears in the **Response** field.
5. If you want to refresh the existing screen by removing the data, click **Clear**.

4.2.14 Configuring SCP Profile

This section provides information about viewing SCP profile details.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Profile** tab.
The SCP Profile page appears:

Figure 4-44 SCP Profile

SCP Profile

Refresh

FQDN:

FQDN

ocscp-scp-worker.scpsvc.svc.cluster.local

NF Instance Id:

NF Instance Id

6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e

NF Status:

NF Status

REGISTERED

NF Type:

NF Type

SCP

NF Set Id List:

NF Set Id List

setscpl1.scpset.5gc.mnc012.mcc345

Serving Scope:

Serving Scope

Loc7,Loc8,Loc9,USEast

Locality:

Locality

Loc7

NF Service Persistence:

NF Service Persistence

false

SCP Info

SCP Prefix:

SCP Prefix

scpPrefix

SCP Ports

Http:

Http

8000

Custom Info

Serving Localities:

Serving Localities

Supported NRF Region or Set ID List:

Supported NRF Region or Set ID List

setnrfl1.nrfset.5gc.mnc012.mcc345,setnrfr1.nrfset.5gc.mnc012.mcc345,setnrfr2.nrfset.5gc.mnc012.mcc345

Mate SCP Info List (Rel 16):

Capacity	Priority	SCP FQDN	SCP InstanceId	Mate SCP Localities
500	5	ocscp-scp-worker.scpsvc1.svc.cluster.local	8faf1bbc-6e4a-4454-a507-a14ef8e1bc5e	Loc10
501	6	ocscp-scp-worker.scpsvc2.svc.cluster.local	8faf1bbc-6e4a-4454-a507-a14ef8e1bc5f	Loc11

Mate Site Info

4.2.15 Configuring Topology Source Info

Following is the procedure to configure Topology Group Info parameters:

- From the left navigation menu, navigate to **SCP** and then select **Topology Source Info**.

Figure 4-45 Topology Source Info

Topology Source Info Help		
Type to Filter ✕ Refresh		
NF Type ↑↓	Status ↑↓	Actions
5G_EIR	NRF	
AF	NRF	
AMF	NRF	
AUSF	NRF	
BSF	NRF	
CHF	NRF	
CUSTOM_ORACLE_SCP	NRF	
GMLC	NRF	
LMF	NRF	

- Click **Edit** from the **Actions** column for the required service that must be modified. The **Edit Topology Source Info** Screen appears.
- Update the **Status** of the specific **NF Type** in the **Edit Topology Source Info** as per your requirement.

Figure 4-46 Edit Topology Source Info

Edit Topology Source Info Help

NF Type:
NF Type
5G_EIR

Status:

Status
LOCAL

Save

Cancel

- Click **Save** to save the **Topology Source Info**.
- Click **Refresh** to view the updated values on the screen.

4.2.16 Configuring NF Selection Mode Configuration

Perform the following procedure to configure Information Element (IE) Registry and create a new custom discovery query parameter.

- From the left navigation pane, click the **SCP** tab, and then click the **NF Selection Enhancement** tab.

2. From the left navigation pane, click the **NF Selection Mode Configuration** tab.
3. In the Add NF Selection Mode Configuration section, do the following:

Table 4-49 NF Selection Mode Configuration


Field Name	REST API Message Body Parameter	Description
Rule Name	ruleName	Indicates the name of the rule defined in the database for nfselection-mode-config. It is a unique string used to identify the record.
Target NF Type List	targetNfTypeList	Indicates the list of any valid NfType defined in the NFTypes-NFServices REST API.
Requester NF Type List	requesterNfTypeList	Indicates the list of any valid NfType defined in the NFTypes-NFServices REST API.
Service Names List	serviceNamesList	Indicates the list of any valid NF service-name as defined in in the NFTypes-NFServices REST API.
Target Plmn List	targetPlmnList	Indicates the list of valid PLMN IDs.
Requester Plmn List	requesterPlmnList	Click Add to configure mcc and mnc .
NF Selection Mode Info	nfSelectionModeInfoList	Indicates the list of custom objects that define the NF selection mode configuration for initial and subsequent service requests. Click Add to: • Configure header match list using the Header Name and Header Status fields. • Set the NF selection mode to ENHANCED_CONSUMER_NF_SELECTION or CONSUMER_NF_SELECTION using the NF Selection Mode drop-down list. Note: The Enhanced Consumer NF Selection Info section must be removed manually if NF Selection Mode is set to CONSUMER_NF_SELECTION. • Configure NF priority and capacity under the Enhanced Consumer NF Selection Info section.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

For more information about the above mentioned fields, see "Configuring NF Selection Mode" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.


4.2.17 Fetching Routing Rules

Following is the procedure to retrieve a collection of routing rules configured at SCP:

1. From the left navigation menu, navigate to **SCP** and then select **Reports**.
2. Select **Routing Rules R16**. The **Routing Rules R16** screen is displayed as follows:

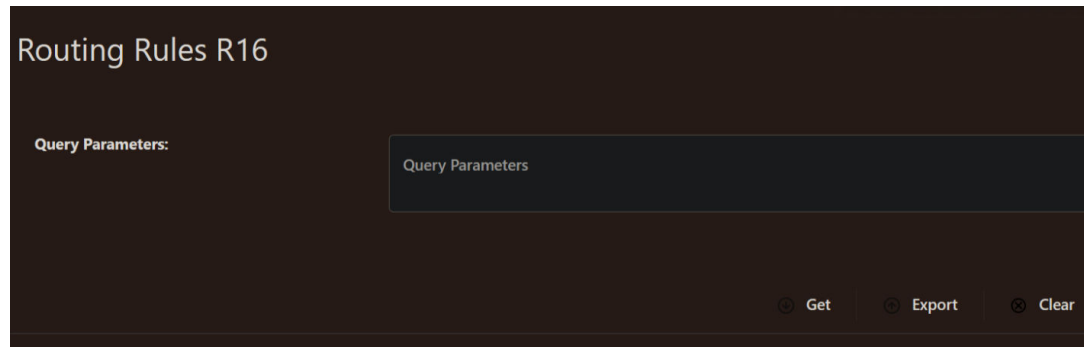Figure 4-47 Routing Rules R16

3. Enter the **Query Parameters** in the field.
4. Click **Get** to fetch the response data. The data is displayed in the **Response** pane.

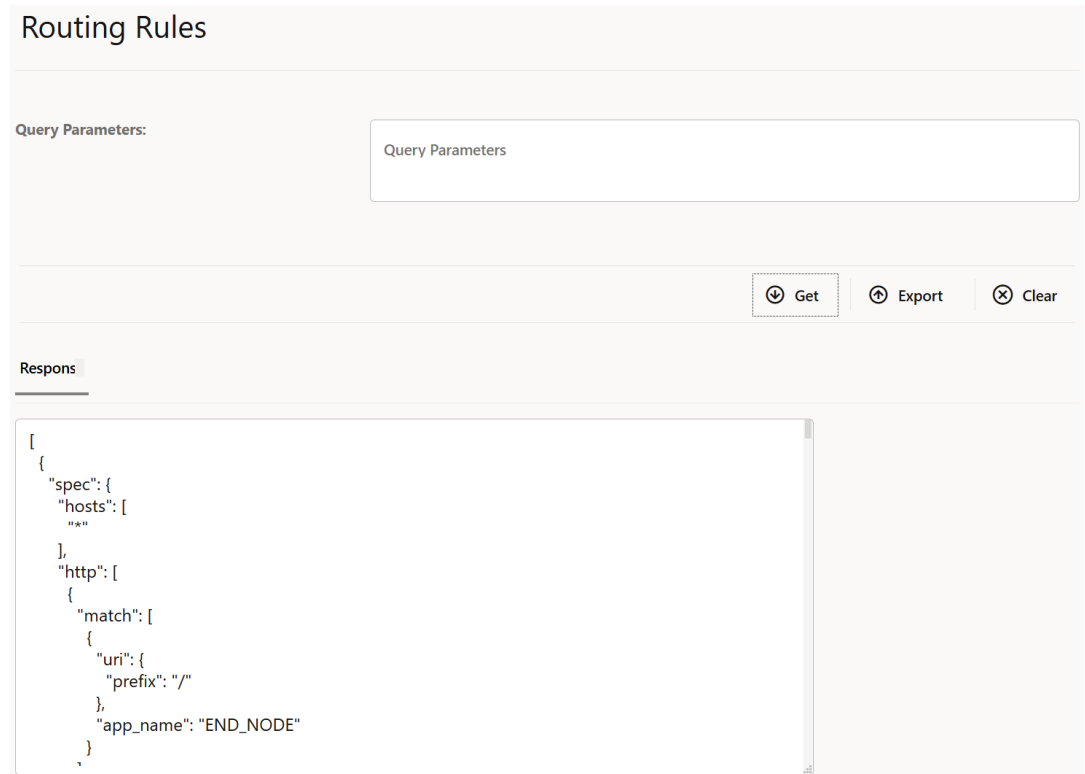Figure 4-48 Response data**Note**

In case the response data is above the configured display limit, a message is displayed stating "Response data has crossed the configured display limit (5 MB), please click on **Export** to download it as a file.". Currently, the display limit cannot be modified, it is set to 5 MB.

5. Click **Export** to download of the response data file.


- Click **Clear** to clear the response data.

4.2.18 Configuring Ingress Rate Limiting

Following is the procedure to configure ingress rate limiting parameters:

- From the left navigation menu, navigate to **SCP** and then select **Rate Limiting**.
- Select **Ingress Rate Limiting**. The screen is displayed.

Figure 4-49 Ingress Rate Limiting

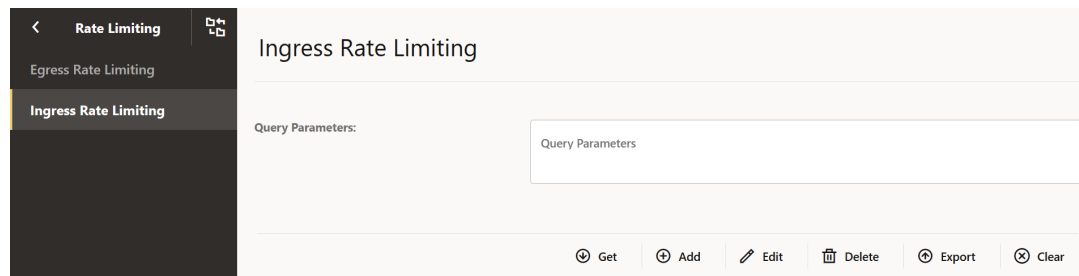

- Enter the **Query Parameters** in the field.
- Click **Get** to fetch the response data. The data is displayed in the **Response** pane.

Note

In case the response data is above the configured display limit, a message is displayed stating "Response data has crossed the configured display limit (5 MB), please click on **Export** to download it as a file.". Currently, the display limit cannot be modified, it is set to 5 MB.


- Click **Add** to add the ingress rate limiting configuration using the Request Body.
- Click **Edit** to edit the Request Body of the ingress rate limiting configuration.
- Click **Delete** to delete the ingress rate limiting configuration based on the query parameters.

4.2.19 Configuring Egress Rate Limiting

Following is the procedure to configure egress rate limiting parameters:

- From the left navigation menu, navigate to **SCP** and then select **Rate Limiting**.
- Select **Egress Rate Limiting**. The screen is displayed.

Figure 4-50 Egress Rate Limiting

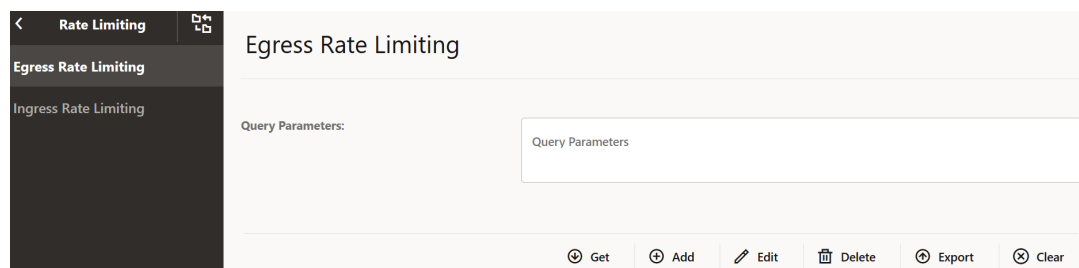

3. Enter the **Query Parameters** in the field.
4. Click **Get** to fetch the response data. The data is displayed in the **Response** pane.

Note

In case the response data is above the configured display limit, a message is displayed stating "Response data has crossed the configured display limit (5 MB), please click on **Export** to download it as a file.". Currently, the display limit cannot be modified, it is set to 5 MB.

5. Click **Add** to add the egress rate limiting configuration using the Request Body.
6. Click **Edit** to edit the Request Body of the egress rate limiting configuration.
7. Click **Delete** to delete the egress rate limiting configuration based on the query parameters.

4.2.20 Configuring Server Header

Perform the following procedure to configure server header parameters to include server header in the producer NF error responses.

1. From the left navigation pane, click the **SCP** tab, and then click the **Global Options** tab.
2. Click the **Server Header** tab.
3. In the Server Header section, click **Edit**.

The Edit Server Header screen appears.

Figure 4-51 Edit Server Header

4. To enable the enhanced server header behavior introduced in SCP 1.15.0, set **Enable Enhance Server Header Behavior** to true.

By default, this option is disabled. For information about server header configurations, see "Configuring Server Header" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

5. In the **Side Car Proxy Server Header** field, enter the strings to identify server header values if error response is generated by side car proxy.

A sample value is envoy.

6. To enable addition of server header in producer NF generated error responses, set **Enable Enhance Server Header Behavior** to true.
By default, this option is disabled.
7. To enable the enhanced server header behavior introduced in SCP 23.1.0, set **Enable Enhance Server Header Behavior V2** to true.
8. Enter status codes in the **Side Car Proxy Server Header Status Code** field.
9. Click **Save**.

4.2.21 Configuring Pod Overload Control Policies

Perform the following procedure to configure pod overload policies to control and discard request messages sent to scp-worker.

For more information about pod overload policies, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

1. From the left navigation pane, navigate to **SCP** and click **Pod Overload Control**, and then click **Worker**.
2. To configure Pod Overload Control Policy, in the left navigation pane, click the **Overload Control Policy** tab.
 - a. In the Overload Control Policy section, click **Get** to retrieve the scp-worker Pod Overload Control Policy data configured based on the threshold level.

Figure 4-52 Overload Control Policy

The screenshot shows the 'Overload Control Policy' configuration page. On the left, a navigation pane lists 'Worker', 'Overload Control Policy', 'Overload Action Policy', and 'Overload Discard Policy'. The 'Overload Control Policy' section is active. The main content area has a 'Query Parameters' input field containing 'thresholdLevel=CRITICAL'. Below this are buttons for 'Get', 'Add', 'Edit', 'Delete', 'Export', and 'Clear'. The 'Response' field shows a JSON object:

```
{
  "thresholdLevel": "CRITICAL",
  "data": {
    "cpuOverloadConfig": {
      "onSetThreshold": 95,
      "abatementThreshold": 92,
      "abatementTimeInMilliseconds": 90
    },
    "pendingTransactionOverloadConfig": {
      "onSetThreshold": 95,
      "abatementThreshold": 92,
      "abatementTimeInMilliseconds": 50
    }
  }
}
```

- b. To add a new request, click **Add** and enter the request body information in the **Request** field.
- c. Click **Submit**.
The request body message appears in the **Response** field.
- d. To edit, export, delete, or clear the data, click the required buttons as described in the following table:

Table 4-50 Buttons and Field Descriptions on Overload Control Policy page

Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve, add, and update different pod overload policies data.
Get	Retrieve the scp-worker Pod Overload Policy data configured based on the threshold level. You can modify this data using the Edit button.
Add	Adds new message requests in the Request field.
Edit	Modifies any existing data by updating mandatory query parameters in the Query Parameters field.
Delete	Removes any message request.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

3. To configure Pod Overload Action Policy, in the left navigation pane, click the **Overload Action Policy** tab.
 - a. In the Overload Action Policy section, click **Get** to retrieve the scp-worker Pod Overload Action Policy data configured based on the threshold level.
 - b. To add a new request, click **Add** and enter the request body information in the **Request** field.
 - c. Click **Submit**.
The request body message appears in the **Response** field.
 - d. To edit, export, delete, or clear the data, click the required buttons as described in [Table 4-50](#).
4. To configure Pod Overload Discard Policy, in the left navigation pane, click the **Overload Discard Policy** tab.
 - a. In the Overload Discard Policy section, click **Get** to retrieve the scp-worker Pod Overload Discard Policy data configured based on the threshold level.
 - b. To add a new request, click **Add** and enter the request body information in the **Request** field.
 - c. Click **Submit**.
The request body message appears in the **Response** field.
 - d. To edit, export, delete, or clear the data, click the required buttons as described in [Table 4-50](#).

4.2.22 Configuring SBI Message Priority

Perform the following procedure to configure Service Based Interface (SBI) Message Priority parameters supported by the Pod Overload Control feature. You can retrieve SCP_SBI Message Priority configured in SCP and modify the data. Also, add a new SBI message request.

For more information about SBI Message Priority parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

1. From the left navigation pane, navigate to **SCP** and click the **SBI Message Priority** tab.

2. In the **SBI Message Priority** section, click **Get** to retrieve the SCP_SBI Message Priority configured in SCP.

Figure 4-53 SBI Message Priority

The screenshot shows the 'SBI Message Priority' configuration page. On the left is a sidebar with a menu including 'SCP', 'Alternate NF Group', 'Canary Release', 'Global Options', 'Mediation', 'NF Rule Profile', 'Pod Overload Control', 'Rate Limiting', 'Reports', 'Routing Options', 'SBI Message Priority' (highlighted), 'SCP Profile', 'Service Groups', 'Topology Source Info', and 'Infrastructure Overview'. The main content area has a title 'SBI Message Priority'. Below the title is a 'Query Parameters' input field. To the right of this field are buttons: 'Get', 'Add', 'Edit', 'Delete', 'Export', and 'Clear'. Below these buttons are two tabs: 'Response' and 'Request'. The 'Request' tab is active, showing a JSON body in a text area. The JSON body is as follows:

```
{
  "ruleName": "default",
  "data": {
    "serviceName": "",
    "httpMethods": [
      ""
    ]
  },
  "messageType": "",
  "enableAssignPriority": false,
  "assignPriority": 16,
  "enableOverridePriority": false,
  "overridePriority": 16
}
```

3. To add a new SBI message request, click **Add** and enter the request body information in the **Request** field.
4. Click **Submit**.
The request body message appears in the **Response** field.
5. To edit, export, delete, or clear the data, click the required buttons as described in the following table:

Table 4-51 Buttons and Field Descriptions of SBI Message Priority

Button and Field Names	Description
Query Parameters	Allows to enter parameters to retrieve, add, and update SBI message priority information.
Get	Retrieves the SCP_SBI Message Priority configured in SCP. You can modify this data using the Edit button.
Add	Adds new message requests in the Request field.
Edit	Modifies any existing data by updating mandatory query parameters in the Query Parameters field.
Delete	Removes any message request.
Export	Exports existing records in the JSON format.
Clear	Refreshes the existing screen by removing the data.

4.2.23 Configuring DNS SRV based Alternate Routing

This section provides information to enable different options to use the Alternate Routing based on the DNS SRV Records feature.

You must log in to the CNC Console while performing the procedures described in the subsequent subsections. Using these procedures, you can perform the followings tasks:

- Set the routing mode.
- Configure the default Time To Live (TTL) value.
- Refresh the DNS SRV records in DB.
- Add and fetch DNS SRV records from DB.

4.2.23.1 Configuring Routing Modes

Perform the following procedure to enable alternate routing and set the routing mode to NF Set, DNS SRV, or both when the forward routing fails.

1. From the left navigation pane, navigate to **SCP** and click the **Routing Options** tab.
The Routing Options screen appears with the list of services.
2. To set alternate route modes, in the **Actions** column, click the **Edit** icon for the corresponding service name.

Figure 4-54 Setting Alternate Routing Mode

Status Code	Add	Edit
207	✓	✗
308	✓	✗
429	✓	✗
5xx	✓	✗

3. In the **DNS SRV Based Alternate Route** section, set the **Mode** of the selected specific services as required:
 - **NF_SET**: SCP performs alternate routing based on the Model C Indirect 5G SBI Communication format. This is the default mode.
 - **DNS_SRV**: SCP performs alternate routing based on the DNS SRV query.
 - **NF_SET_FOLLOWED_BY_DNSSRV**: SCP performs alternate routing based on NF Set and then with DNS SRV.
4. Click **Save**.

4.2.23.2 Configuring the Default TTL Value

Perform the following procedure to configure the default Time To Live (TTL) value.

1. From the left navigation pane, navigate to **SCP** and click the **Global Options** tab.
2. To configure the **TTL** value, click the **System Config** tab.
3. In the **System Config** section, click the **Edit** icon and set the **TTL** value as required.
By default, this value is set to 900s. The range is from 30s to 86400s.

Figure 4-55 Setting TTL Value

The screenshot shows a configuration page with the following sections:

- Forward Nf Discovery Headers:** A toggle switch is turned on.
- TTL:** A text input field containing the value "900s".
- DnsQueryTimeout:** A text input field containing the value "5000ms".
- Traffic Policy:** A section header with a dropdown arrow.
- Connection Pool:** A section header with a dropdown arrow.
- HTTP:** A section header with a dropdown arrow.
- Idle Timeout:** A text input field containing the value "600s".
- HTTPS:** A section header with a dropdown arrow.
- Idle Timeout:** A text input field containing the value "600s".

4. Click **Submit**.

4.2.23.3 Configuring Alternate NF Group

Perform the following procedure to add and fetch DNS SRV records from DB.

1. From the left navigation pane, navigate to **SCP** and click the **Alternate NF Group** tab.
2. To configure DNS records using query parameters, click the **Configuration** tab.
3. In the **Configuration** section, click **Add** to add query parameters in the **Request** field.

Figure 4-56 Alternate NF Group Options

The screenshot shows the "Alternate NF Group" configuration page. The left sidebar has a "Configuration" tab selected. The main area is titled "Configuration" and contains a "Query Parameters:" label and a text input field. At the bottom right, there are five buttons: "Get", "Add", "Delete", "Export", and "Clear".

4. Click **Submit**.
Query parameters automatically appear in the **Response** field.
5. Click **Get** to view all the records of the query parameter in the **Response** field.
6. To export, delete, or clear the data, click the required buttons as described in the following table:

Table 4-52 Configuration Query Parameters

Button and Field Names	Description
Query Parameters	FQDN of an NF profile. Example: serviceProtoName=_http._tcp.pcf4svc.scpsvc.svc.cluster.local&apiPrefix=USEast
Get	Fetches DNS SRV records from DB.
Add	Adds DNS SRV records to DB by querying the DNS server with the combination of apiPrefix and Service Proto Name. Example: { "apiPrefix": "USEast", "serviceProtoName": "_http._tcp.pcf2svc.scpsvc.svc.cluster.local" }
Delete	Removes a particular record from DB based on Service Proto Name (SPN). Example: serviceProtoName=_http._tcp.udm1svc.scpsvc.svc.cluster.local
Export	Exports DNS SRV records in the JSON format.
Clear	Resets all the fields in the Configuration section.
Response	Displays the required DNS SRV records.
Request	Allows you to add a query parameter when you click the Add button.

- Click **Submit**.

4.2.23.4 Configuring Refresh DNS SRV Data

Perform the following procedure to refresh the DNS SRV records in DB.

- From the left navigation pane, navigate to **SCP** and click the **Alternate NF Group** tab.
- To refresh DB records, click the **Refresh DNS SRV Data** tab in the left navigation pane.
- Click **Refresh**.
- In the **Request** field, enter one of the following parameters:

Table 4-53 Request Parameters

Parameter	Description
{ "spnlist": [] }	This parameter refreshes only specific records that are provided within []. For example: { "spnlist": ["_http._tcp.pcf4svc.scpsvc.svc.cluster.local", "_http._tcp.nf1stub.scpsvc.svc"] }
{ "refreshAll": "true" }	This parameter refreshes all the records.

- Click **Submit**.

4.2.24 Configuring SBI Message Priority and Error Profiles for Egress Congestion Control

Perform the following procedure to configure values for determining the priority of ingress messages and create error profiles.

1. From the left navigation pane, navigate to **SCP** and click the **Routing Options** tab.
2. In the Routing Options section, select a service name from the Service Name column and click the corresponding edit icon.
3. In the NFService Load Based Congestion Control section, in the **SBI Message Priority Discard From** field, enter a value to determine the priority of the ingress message.

Note

- The value of the **SBI Message Priority Discard From** field is compared with the "3gpp-Sbi-Message-Priority" header to categorize an ingress message request as high or low priority. By default, SCP considers 24 as the priority for the ingress message request if the message does not have the "3gpp-Sbi-Message-Priority" header. If the priority of the ingress message request is less than the value of **SBI Message Priority Discard From**, then the message is considered as high priority message.
- SCP discards all the 5G SBI messages whose "3gpp-Sbi-Message-Priority" header value is equal to or greater than this configuration.

Figure 4-57 Configuring SBI Message Priority and Error Profiles for Egress Congestion Control

SBI Message Priority Discard From:	24

▼ Error Profile Configuration

Error Code:	503
Error Cause:	NF_CONGESTION
Error Title:	NF service is overloaded/congested
Retry After:	5
Redirect Url:	
Error Description:	NF service is overloaded/congested

4. To configuring nextHopSCP and SEPP, see [Configuring the nextHopSCP Routing Option](#) section.

- To configure the error profiles, complete the following fields:

Table 4-54 Error Profile Configuration

Field Name	Description
Error Code	Indicates configurable error codes to be sent by SCP to consumer NFs when the producer NF is congested or throttled in case of a low priority message. The default value is 500, which indicates: Service Unavailable.
Error Cause	Indicates the error cause that is specific to the occurrence of the problem. The default value is NF_CONGESTION.
Error Title	Indicates the title of the error type. The default value is NF service is overloaded or congested.
Retry After	Indicates the time during which the service is unavailable. It is applicable when the error code is 503. When the error code is 3xx, where x indicates any numeric value, it specifies the minimum time that the user must wait before issuing the redirected request. The default value is 5. The unit of this value can be HTTP-date or delta-seconds. For example: - Fri, 31 Dec 2001 23:59:59 GMT 120 In the latter example, the delay is 2 minutes.
Redirect Url	Retries the request towards the directed resource referred in the Location header using the same request method. Example: https://udm1.udmsvc.domain/USEast/nudm-sdm/v1/path2
Error Description	Indicates an explanation specific to the occurrence of the problem. The default value is NF service is overloaded or congested.

- Click **Save**.

4.2.25 Configuring the nextHopSCP Routing Option

Perform the following procedure to configure the nextHopSCP routing options.

- From the left navigation pane, navigate to **SCP** and click the **Routing Options** tab.
The Routing Options screen appears with the list of services.
- To edit the Next Hop SCP section, click the **Edit** icon for the corresponding service name.
- Expand the **Next Hop SCP Routing Options** option.

Figure 4-58 NextHopSCP

Next Hop SCP Routing Options

Response Timeout: 4s

Total Transaction Lifetime: 7s

Service Level

Max Routing Attempts: 2

Service Endpoint Level

Max Routing Attempts: 1

NFService Load Based Congestion Control

Alternate Routing Onset Threshold Percent: 80

Alternate Routing Abatement Threshold Percent: 75

Throttle Onset Threshold Percent: 90

Throttle Abatement Threshold Percent: 85

Error Profile Configuration

Reroute On Response Code List:

Exceptions:

Name	Action	Error Code	Error Response
No_Host	Send_Answer	503	Service Unavailable

4. Configure the following fields as required:

Table 4-55 Configuring Next Hop SCP Routing Options

Field Name	Description
Response Timeout	Indicates the allotted time to respond to a message request. When the response timeout expires, SCP performs alternate rerouting to the available alternate NF or pod. If no alternate NFs or pods are available, SCP sends an error message. The default value is 4 seconds.
Total Transaction lifetime	Indicates the total time allowed to forward a request, including initial and all subsequent routing attempts. Note: The total time consumed in processing all retries must not exceed the total transaction lifetime. The default value is 7 seconds.
Max Routing Attempts (Service Level)	Indicates the maximum number of forward routing attempts made at a service level. - Maximum number of times SCP is allowed to forward a request message. If the Max Routing attempts value is set to 1 for both service and pod level, the total transaction lifetime field value is not required. If the Max Routing attempts value is set to greater than 1 for both service and pod level, then the total transaction lifetime field value is considered for rerouting processing. - Rerouting of request messages is always considered as Max Routing attempts value minus one (-1), that is, Rerouting of request messages = (Max Routing attempts value) -1 The default routing attempt is 2.

Table 4-55 (Cont.) Configuring Next Hop SCP Routing Options

Field Name	Description
Max Routing Attempts (Service Endpoint Level)	Indicates the maximum number of forward routing attempts at NF or pod level. - Maximum number of times SCP is allowed to forward a request message. If the Max Routing attempts value is set to 1 for both service and pod level, the total transaction lifetime field value is not required. If the Max Routing attempts value is set to greater than 1 for both service and pod level, then the total transaction lifetime field value is considered for rerouting processing. - Rerouting of request messages is always considered as Max Routing attempts value minus one (-1), that is, Rerouting of request messages = (Max Routing attempts value) -1 The default routing attempt is 1.
Alternate Routing Onset Threshold Percent (NFService Load Based Congestion Control Level)	Indicates the percentage of reselection onset threshold percent. The default value is 80%.
Alternate Routing Abatement Threshold Percent (NFService Load Based Congestion Control Level)	Indicates the percentage of reselection abatement threshold percent. The default value is 75%.
Throttle Onset Threshold Percent (NFService Load Based Congestion Control Level)	Indicates the percentage of Throttle Onset Threshold Percent. The default value is 90%.
Throttle Abatement Threshold Percent (NFService Load Based Congestion Control Level)	Indicates the percentage of Throttle Abatement Threshold Percent. The default value is 85%.

- Click **Save**.

4.2.26 Configuring SEPP Inter PLMN Routing

Perform the following procedure to add an NF instance ID and configure Public Land Mobile Network (PLMN) IDs supported by Security Edge Protection Proxy (SEPP).

- From the left navigation pane, navigate to **SCP** and click the **SEPP Info** tab.
- To filter or add an NF instance ID in the SEPP Info section, click the required buttons as described in the following table:

Table 4-56 Filtering and Adding NF Instance IDs

Button, Column, and Field Names	Description
Type to Filter	This field allows you to search for an NF instance ID and displays it in the NF Instance ID column.
Refresh	This button refreshes information in the SEPP Info section.
Add	This button allows you to add a new NF instance ID.
NF Instance ID	This column displays the available NF instance IDs.

Table 4-56 (Cont.) Filtering and Adding NF Instance IDs

Button, Column, and Field Names	Description
Actions	This column allows you to edit an existing NF instance ID using the edit option.

3. To add a new NF instance ID, click **Add**.

Figure 4-59 Adding a New NF Instance ID

4. In the **NF Instance ID** field, enter an instance ID, for example, 8faf1bbc-6e4a-4454-a507-aef01a101a06.
5. Expand the **SEPP Info** option to configure SEPP ports as follows:
 - a. In the **Http** field, enter a value between 0 and 65535.
This field is applicable for the HTTP connection.
 - b. In the **Https** field, enter a value between 0 and 65535.
This field is applicable for the HTTPS connection.

Note

If both the fields are configured, then the HTTPS connection is preferred.

6. To configure PLMN IDs supported by SEPP, in the Remote PLMN List section, click **Add**.

Figure 4-60 Supported PLMN by SEPP

Add Remote PLMN List

MCC:

MCC

MNC:

MNC

Save

Cancel

- a. In the **MCC** field, enter the required mobile country code.
Mobile Country Code (MCC) is a three digit number ranging from 0 to 9.
 - b. In the **MNC** field, enter the required mobile network code.
Mobile Network Code (MNC) can be of two or three digits ranging from 0 to 9.
 - c. Click **Save**.
7. Click **Save**.

4.2.27 Configuring Route Groups

Perform the following procedure to configure Route Groups parameters.

1. From the left navigation pane, click the **SCP** tab, and then click the **Route Groups** tab.
The Route Groups screen appears.

Figure 4-61 Route Groups

Route Groups

Query Parameters:

Query Parameters

Get

Add

Delete

Export

Clear

2. In the Route Groups section, click **Add** to add request body in the **Request** field.
Query parameters are applicable only for DELETE and GET resource types.
3. Click **Submit**.
Response body automatically appears in the **Response** field.

4. Click **Get** to view all the records of the response body in the **Response** field.
5. To export, delete, or clear the data, click the required buttons as described in the following table, and then click **Submit**.

Table 4-57 Route Groups Buttons and Field Descriptions

Button and Field Name	Description
Response	Displays the required Route Groups records.
Request	Allows you to add a query parameter when you click the Add button.
Query Parameters	Processes routeGroupId, routeGroupType, or primaryRoute parameters.
Get	Retrieves configured route groups based on the supplied query parameters as filtering criteria.
Export	Exports Route Groups records in the JSON format.
Delete	Removes the configuration of an existing route group.
Clear	Resets all the fields in this screen.
Add	Configures a new route group or replaces an existing route group by providing a route group configuration in the request body.

4.2.28 Configuring Ingress Rate Limiter Consumer Info

Perform the following procedure to configure consumer information for ingress rate limiting.

1. From the left navigation pane, click the **SCP** tab, and then click the **Ingress Rate Limiter Consumer Info** tab.

The Ingress Rate Limiter Consumer Info screen appears:

Figure 4-62 Ingress Rate Limiter Consumer Info

The screenshot shows the 'Consumer Info Configuration' screen. The left sidebar has a dark theme with the following menu items: < SCP, Alternate NF Group, Canary Release, Consumer Info Configurati..., Global Options, Mediation, NF Rule Profile, Outlier Detection, Pod Overload Control, Rate Limiting, Reports, Route Groups, and Routing Options. The main content area has a light gray background and is titled 'Consumer Info Configuration'. It contains the following fields and values:

Field	Value
XFCC Certificate Extract Index:	XFCC Certificate Extract Index 0
XFCC Extract Field:	XFCC Extract Field DNS
XFCC Extract Index:	XFCC Extract Index 0
User Agent Format:	User Agent Format
Primary Header Name:	Primary Header Name X-Forwarded-Client-Cert
User Agent Separator:	User Agent Separator
Secondary Header Name:	Secondary Header Name

2. In the Ingress Rate Limiter Consumer Info section, click **Edit**, and then configure the fields as described in the following table:

Table 4-58 Configuring Consumer Information

Field Name	Description
XFCC Certificate Extract Index	The certificate extract index contains certificate information in the XFCC header. This parameter is used to decode "X-Forwarded-Client-Cert" for the FQDN. The default value is 0.
XFCC Extract Field	This is the name of the field that has to be retrieved from the XFCC header. The default value is DNS.
XFCC Extract Index	Index where the field configured in 'extractField' is present in the XFCC header for extraction. The default value is 0.
User Agent Format	The header format to identify the consumer NF according to the ingress rate limiting configurations. It supports the following formats: • Format1: NFTYPE-NFINSTANCEID FQDN or NFTYPE-NFINSTANCEID-FQDN • Format2: NFTYPE-FQDN NFINSTANCEID or NFTYPE-FQDN-NFINSTANCEID • Format3: NFTYPE-NFINSTANCEID • Format4: NFTYPE-FQDN Where, • NFTYPE indicates the type of consumer NF. • NFINSTANCEID indicates the instance ID of the consumer NF. • FQDN indicates the FQDN of the consumer NF. In the aforementioned example, "-" is a separator and NFInstanceId, FQDN, and Hostname are supported IDs.
Primary Header Name	The header name to identify the consumer NF according to the ingress rate limiting configurations. This is a mandatory parameter. This parameter is given priority over the secondaryHeaderName parameter. The default value is "X-Forwarded-Client-Cert". It can use the following values: • "User-Agent" • "X-Forwarded-Client-Cert"
User Agent Separator	This is the separator that the User-Agent header uses to separate NFINSTANCEID and FQDN. The default value is "SPACE". It can use the following values: • "SPACE" • "HYPHEN"
Secondary Header Name	The header name to identify the consumer NF according to the ingress rate limiting configurations. This is an optional parameter. The default value is "". It can use the following values: • "User-Agent" • "X-Forwarded-Client-Cert"

3. Click **Save**.

4.2.29 Configuring SCP Services

Perform the following procedure to view thread watchdog and queue alerts threshold configurations required for SCP microservices.

1. From the left navigation pane, click the SCP tab, and then click the SCP Service Configuration tab.
2. In the left navigation pane, click the SCPC-AlternateResolution tab and do the following:
 - a. In the SCPC-AlternateResolution Service Configuration section, expand the SCP Service Configuration option.
 - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
 - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
3. In the left navigation pane, click the SCPC-Audit tab and do the following:
 - a. In the SCPC-Audit Service Configuration section, expand the SCP Service Configuration option.
 - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
 - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
4. In the left navigation pane, click the SCPC-Configuration tab and do the following:
 - a. In the SCPC-Configuration Service Configuration section, expand the SCP Service Configuration option.
 - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
 - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
5. In the left navigation pane, click the SCPC-Configuration tab and do the following:
 - a. In the SCPC-Configuration Service Configuration section, expand the SCP Service Configuration option.
 - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
 - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
6. In the left navigation pane, click the SCPC-Notification tab and do the following:
 - a. In the SCPC-Notification Service Configuration section, expand the SCP Service Configuration option.
 - b. To view the threshold values of different queues, expand the Queue Utilization Alert Thresholds option.

The SCPC-Notification Service Configuration screen displays the queue values for critical, major, and minor threshold.

Figure 4-63 SCPC-Notification Service Configuration

Queue Name	Critical Queue Threshold	Major Queue Threshold	Minor Queue Threshold	
notificationQueue	86%	76%	66%	View
waitingQueue	85%	75%	65%	View
runQueue	85%	75%	65%	View

The following table describes the significance of each column to determine the values of critical, major, and minor threshold.

Note

The critical, major, and minor threshold values are automatically populated in the CNC Console and cannot be modified. These values are configured using REST APIs as described in "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Table 4-59 Queue Utilization Alert Thresholds

Column Name	Description
Queue Name	Indicates the name of the queue for which these configurations are applicable.
Critical Queue Threshold	Indicates the percentage (%) value for queue usage threshold upon reaching which a "critical" alert is raised.
Major Queue Threshold	Indicates the percentage (%) value for queue usage threshold upon reaching which a "major" alert is raised.
Minor Queue Threshold	Indicates the percentage (%) value for queue usage threshold upon reaching which a "minor" alert is raised.

7. In the left navigation pane, click the SCPC-Subscription tab and do the following:
 - a. In the SCPC-Subscription Service Configuration section, expand the SCP Service Configuration option.
 - b. To view the Thread Watchdog configuration values, expand the Thread Watchdog Configuration option.
 - c. To view the Connectivity Watchdog configuration values, expand the Connectivity Watchdog Configuration option.
8. In the left navigation pane, click the SCP-NrfProxy tab and do the following:
 - a. In the SCP-NrfProxy Service Configuration section, expand the SCP Service Configuration option.

- b. To view the threshold values of different queues, expand the Queue Utilization Alert Thresholds option.

The SCP-NrfProxy Service Configuration screen displays the queue values for critical, major, and minor threshold.

Figure 4-64 SCP-NrfProxy Service Configuration

Queue Name	Critical Queue Threshold	Major Queue Threshold	Minor Queue Threshold	
scpDownstreamExecutorQueue	85%	75%	65%	View
scpUpstreamExecutorQueue	85%	75%	65%	View

The queue utilization alerts threshold values are automatically populated in the CNC Console as described in [Table 4-59](#).

- c. Expand the Thread Watchdog Configuration option to view the values of thread watchdog configurations:

The following table describes the fields required to configure the Thread Watchdog feature:

Note

Thread watchdog field values are automatically populated in the CNC Console and cannot be modified. These values are configured using REST APIs as described in "Configuring SCP Services" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

Table 4-60 Thread Watchdog Configuration

Field Name	Description
Enable Thread Watchdog	Specifies whether to enable or disable liveness failures. If this parameter is set to <code>true</code> , liveness fails whenever the watchdog reports a stuck or deadlocked thread.
Watchdog Monitoring Interval	Indicates the time interval used by the watchdog to monitor if any threads are stuck.
Watchdog Interval	Indicates the maximum time allowed for threads to be nonresponsive. Watchdog uses this time to determine if a thread is stuck. For example, if this value is set to 10 seconds and a thread does not respond for 10 seconds, then the watchdog marks that thread as stuck or nonresponsive.
Watchdog Failure Count	Indicates the maximum number of times thread watchdog attempts to check if a thread is stuck before marking the thread as hung or stuck. For example, if this value is set to 3, then the watchdog checks if a thread is stuck 3 times continuously before marking it as stuck or hung.

9. In the left navigation pane, click the SCP-Worker tab and do the following:
 - a. In the SCP-Worker Service Configuration section, expand the SCP Service Configuration option.
 - b. To view the threshold values of different queues, expand the Queue Utilization Alert Thresholds option.

The SCP-Worker Service Configuration screen displays the queue values for critical, major, and minor threshold.

Figure 4-65 SCP-Worker Service Configuration

SCP-Worker Service Configuration				Refresh																				
SCP Service Configuration Queue Utilization Alert Thresholds Value: <table> <tr> <th>Queue Name</th><th>Critical Queue Threshold</th><th>Major Queue Threshold</th><th>Minor Queue Threshold</th><th></th></tr> <tr> <td>scpDownstreamExecutorQueue</td><td>85%</td><td>75%</td><td>65%</td><td>View</td></tr> <tr> <td>scpNrfProxyDownstreamExecutorQueue</td><td>85%</td><td>75%</td><td>65%</td><td>View</td></tr> <tr> <td>scpUpstreamExecutorQueue</td><td>85%</td><td>75%</td><td>65%</td><td>View</td></tr> </table>					Queue Name	Critical Queue Threshold	Major Queue Threshold	Minor Queue Threshold		scpDownstreamExecutorQueue	85%	75%	65%	View	scpNrfProxyDownstreamExecutorQueue	85%	75%	65%	View	scpUpstreamExecutorQueue	85%	75%	65%	View
Queue Name	Critical Queue Threshold	Major Queue Threshold	Minor Queue Threshold																					
scpDownstreamExecutorQueue	85%	75%	65%	View																				
scpNrfProxyDownstreamExecutorQueue	85%	75%	65%	View																				
scpUpstreamExecutorQueue	85%	75%	65%	View																				

The queue utilization alerts threshold values are automatically populated in the CNC Console as described in [Table 4-59](#).

- c. Expand the Thread Watchdog Configuration option to view the values of thread watchdog configurations that are automatically populated in the CNC Console as described in [Table 4-60](#).

4.2.30 Configuring Outlier Detection

Perform the following procedure to add, edit, or remove any existing rule name for outlier detection.

1. From the left navigation pane, click the SCP tab, and then click the Outlier Detection tab.
The Outlier Detection screen appears.

Figure 4-66 Outlier Detection

Outlier Detection	
Type to Filter ✕ ↻ Refresh ⊕ Add	
Rule Name ↕	Actions
defaultRule	✎ 🗑
nextHopScpODRule	✎ 🗑

2. If you want to edit or remove any existing rule name from the Rule Name column, click **Edit** or **Delete** icon in the Actions column.
3. To add new rule names, click **Add**.
4. In the Add Outlier Detection section, configure the following fields:
 - **Rule Name:** Enter a unique rule name that is available in the outlier detection table.
 - **Consecutive Errors:** Enter a value between from 5 to 500 to define the number of consecutive errors after which an endpoint is considered unhealthy.
 - **Interval:** Enter a value from 30 seconds to 86400 seconds to set the interval after which stale records are removed from the outlier data cache.
 - **Base Ejection Time:** Enter a value between 1 second and 500 seconds to set the of duration endpoint ejection.
 - **Error List:** Select the required error name from the available error list to be considered for outlier detection.
5. Click **Save**.

4.2.31 Configuring Traffic Feed

Perform the following procedure to configure OCNADD and Trigger Points.

1. From the left navigation pane, click the SCP tab, and then click the Traffic Feed tab.
2. To configure OCNADD fields, in the left navigation pane, click the Data Director tab.
3. In the Traffic Feed Data Director Configuration section, click **Edit** and configure the fields as described in the "Configuring Traffic Feed Data Director" section of the *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
4. To configure Trigger Points, in the left navigation pane, click the Trigger Points tab.
5. In the Trigger Points section, click **Add** and configure the fields as described in the "Configuring Traffic Feed Trigger Point Config" section of the *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
6. Click **Save**.

4.2.32 Congestion Control Configurations

Perform the following steps to configure congestion control parameters:

1. From the left navigation menu, navigate to **SCP** and then select **Congestion Control**.

- Click **Edit** icon from the **Actions** column for the required service that must be modified.

Note

The default rule name cannot be deleted. The new rule name can be added, modified, or deleted.

The **Edit Congestion Control** screen appears.

Figure 4-67 Congestion Control

- Make the required modifications for the following parameters:
 - Alternate Routing Onset Threshold Percent:** Set the threshold percentage for reselection abatement.
 - Alternate Routing Abatement Threshold Percent:** Set the threshold percentage for alternate routing abatement.
 - Throttle Onset Threshold Percent:** Set the threshold percentage for onset throttling.
 - Throttle Abatement Threshold Percent:** Set the threshold percentage for throttle abatement.
 - SBI Msg Priority Discard From:** Set the priority for message, after which the messages can be discarded. For example, if the value is 30, then messages with priority 0-29 are high priority, and other low-priority messages will be throttled.

Note

All the parameters are mandatory.

For more information about the configuration parameters, see *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- Click **Save**.
- Click **Cancel** to reset all the fields.
- Click **Delete** from the **Actions** column to delete the record.

4.2.33 Configuring Routing Options

Perform the following procedure to configure routing options.

1. From the left navigation menu, navigate to **SCP**, and then click the **Routing Options** tab.
2. From the left navigation menu, click the **Routing Options Config** tab.
3. In the Routing Options Config section, perform one of the following steps:
 - To configure a new routing option, click **Add** and configure the following fields:

Table 4-61 Field Name

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Unique configuration name to identify the records. Number of characters is 256. Allowed character combinations should be alpha-numeric, hyphen, and underscore.
Message Type	messageType	List of types of messages, such as notifications and SBI-messages, for which the routing configurations will apply.
Notification Type	notificationType	Indicates the notification type.
NF Type	nfType	The NF type of the producer NF or server for which routing options are configured. This is either 3GPP defined NFType as per TS 29.510 or custom NFType.
NF Service Name	nfServiceName	The NF service name of producer NF or server for which routing options are configured. This is either 3GPP defined serviceName as per TS29.510 or any custom service name.
Method	method	Indicates the method type. If no value is provided, '*' is configured in this field. This indicates that SCP-Worker will match any method type from following list: – GET – PUT – POST – PATCH – OPTIONS – TRACE – HEAD – CONNECT – DELETE Note: Both Method and API Specific Resource Uri should be configured for service operation specific configurations.
API Specific Resource Uri	apiSpecificResourceUri	REGEX expression which is used to validate resource URI in the RX request. Note: Both Method and API Specific Resource Uri should be configured for service operation specific configurations.
Sender NFType	senderNFType	Configures consumer NFType, for example, client or sender. It decides routing options based on the consumer NFType that sends the message to SCP for routing. In the current implementation, this field supports "*" as value, which means match all.
Routing Config Set Name	routingConfigSetName	Name of the Routing Config set record. For more information, see "Configuring Routing Options Config" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i> .

Table 4-61 (Cont.) Field Name

Field Name	REST API Message Body Parameter	Description
Service Operation	serviceOperation	Indicates the service operation type. The value of this field is compared with the second part of the callback type values in the 3gpp-Sbi-Callback header when the NF service sends a notification message. For example, when nudm-uecm sends DeregistrationNotification, then callback type value in the 3gpp-Sbi-Callback header will have Nudm_UECM_DeregistrationNotification, where DeregistrationNotification is callback service operation. If this parameter is not configured, only values that match the range regular expression are permitted.
API Name Ax Heading	apiNameAxHeading	Indicates the service type of the consumer NF. The value of this field is the first part of the callback type values in the 3gpp-Sbi-Callback header in a notification message. For example, when nudm-uecm sends DeregistrationNotification, then callback type value in 3gpp-Sbi-Callback header will have Nudm_UECM_DeregistrationNotification. Where Nudm_UECM is the apiNameAxHeading and DeregistrationNotification is callback service operation.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

For more information about the above mentioned fields, see "Configuring Routing Options Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To edit or remove any existing routing option configurations, select an existing routing options instance from the **Config Name** column, and click the corresponding **Edit** or **Delete** icon.
4. Click **Save**.
 5. To retrieve the query parameters, from the left navigation pane, click the **Routing Options Config Query** tab.
 - a. In the **Query Parameters** field, enter the query parameter, such as nftype=UDM, and click **Get**.
Response and request configuration information appears in **Response** and **Request** fields.
 6. To configure routing config set, from the left navigation pane, click the **Routing Config Set** tab.
 - a. In the Routing Config Set section, do one of the following:
 - Click **Add** to configure a new routing config set using the following fields:

Table 4-62 Routing Config Set Name

Field Name	REST API Message Body Parameter	Description
Routing Config Set Name	routingConfigSetName	Indicates the name of the Routing Config set record, a rule with this name must be available.
Service Level Routing Options		
Max Routing Attempts	maxRoutingAttempts	Indicates the number of re-route attempts (retries) at the NF or pod level. This is the maximum number of times the SCP is allowed to forward a request message at the NF or pod level.
Alternate Routing	alternateRouting	This parameter determines whether SCP will attempt alternate routing.
Pod Level Routing Options		
Alternate Routing	alternateRouting	This parameter determines whether SCP will attempt alternate routing.
Max Routing Attempts	maxRoutingAttempts	Indicates the number of re-route attempts (retries) at the NF or pod level. This is the maximum number of times the SCP is allowed to forward a request message at the NF or pod level.
Alternate Route		
Mode	mode	Defines the alternate routing mode.
Total Transaction Lifetime	totalTransactionLifetime	Indicates the total time allowed to forward a request, including the initial and all subsequent routing attempts.
Response Timeout	responseTimeout	Indicates the allotted time to respond to a message request. When the response timeout expires, SCP performs alternate rerouting to the available alternate NF or pod. If no alternate NFs or pods are available, SCP sends an error message. Notes: - The supported values can be in 's' or 'ms'. Where, 's' is seconds and 'ms' is milliseconds. - This parameter must be an integer, not a decimal. If the value is provided as a decimal, convert it to an integer unit. For example, 0.1 s becomes 100 ms.
Reroute Condition List	reRouteConditionList	Configures reroute conditions. Click Add to define the status code.
Exception Error Responses	exceptionErrorResponses	Configures exception error responses Click Add to add error responses and actions.
Next Hop Roaming Proxy	nextHopRoamingProxy	Indicates routing configuration name of the next hop roaming proxy record. Click Add to configure the NF type and routing configuration name.
Next Hop Proxy	nextHopProxy	Indicates routing configuration name of the next hop proxy record. Click Add to configure the NF type and routing configuration name.
Assign Preferred Locality	assignPreferredLocality	SCP assigns its own locality as a preferred locality for NF discovery if assignPreferredLocality is enabled and the 3gpp-Sbi-Discovery-preferredlocality header is absent in ingress service requests.
Override Preferred Locality	overridePreferredLocality	SCP overrides the 3gpp-Sbi-Discoverypreferred-locality header received in the service request and uses its own locality as preferred-locality for NF discovery if overridePreferredLocality is enabled, and the 3gpp-Sbi-Discoverypreferred-locality header is present in ingress service requests.
Forward Revised Preferred Locality	forwardRevisedPreferredLocality	Controls the forwarding of assigned or overridden values of 3gpp-Sbi-Discovery-preferred-locality headers to the next hop SCP.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

Enter or modify the required values for the fields as described in the "Configuring Routing Config Set" section in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To modified any existing configuration, select a service type from the Config Name column and click the corresponding **Edit** icon.
7. To configure next hop roaming proxy, from the left navigation pane, click the Next Hop Roaming Proxy tab.
 - a. To configure a new routing option, click **Add** and configure the following fields:

Table 4-63 Next Hop Roaming Proxy

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Unique configuration name to identify the records. Number of characters is 256. Allowed character combinations should be alpha-numeric, hyphen, and underscore.
Total Transaction Lifetime	totalTransactionLifetime	Indicates the total time allowed to forward a request, including the initial and all subsequent routing attempts.
Response Timeout	responseTimeout	Indicates the allotted time to respond to a message request. When the response timeout expires, SCP performs alternate rerouting to the available alternate NF or pod. If no alternate NFs or pods are available, SCP sends an error message. Notes: • The supported values can be in 's' or 'ms'. Where, 's' is seconds and 'ms' is milliseconds. • This parameter must be an integer, not a decimal. If the value is provided as a decimal, convert it to an integer unit. For example, 0.1 s becomes 100 ms.
Max Routing Attempts	maxRoutingAttempts	Indicates the number of re-route attempts (retries) at the NF or pod level. This is the maximum number of times the SCP is allowed to forward a request message at the NF or pod level.
Reroute Condition List	reRouteConditionList	Configures reroute conditions. Click Add to define the status code.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

8. To configure next hop proxy, from the left navigation pane, click the Next Hop Proxy tab.
 - a. To configure a new routing option, click **Add** and configure the following fields:

Table 4-64 Next Hop Proxy

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Unique configuration name to identify the records. Number of characters is 256. Allowed character combinations should be alpha-numeric, hyphen, and underscore.
Total Transaction Lifetime	totalTransactionLifetime	Indicates the total time allowed to forward a request, including the initial and all subsequent routing attempts.

Table 4-64 (Cont.) Next Hop Proxy

Field Name	REST API Message Body Parameter	Description
Response Timeout	responseTimeout	Indicates the allotted time to respond to a message request. When the response timeout expires, SCP performs alternate rerouting to the available alternate NF or pod. If no alternate NFs or pods are available, SCP sends an error message. Notes: - The supported values can be in 's' or 'ms'. Where, 's' is seconds and 'ms' is milliseconds. - This parameter must be an integer, not a decimal. If the value is provided as a decimal, convert it to an integer unit. For example, 0.1 s becomes 100 ms.
Max Routing Attempts	maxRoutingAttempts	Indicates the number of re-route attempts (retries) at the NF or pod level. This is the maximum number of times the SCP is allowed to forward a request message at the NF or pod level.
Reroute Condition List	reRouteConditionList	Configures reroute conditions. Click Add to define the status code. Range: 301, 302, 303, 304, 307, 308, 400, 401, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 421, 422, 425, 426, 428, 429, 431, 451, 500, 501, 502, 503, 504, 505, 506, 507, 508, 510, 511, 5xx, "connectionError", "timeout"
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

4.2.34 Configuring Routing Config Set

Perform the following procedure to define routing options fields. These fields are mapped with service operation related fields as described in [Configuring Routing Options](#). These routing options fields are applied to a certain message routing when matched with service operation fields.

- From the left navigation menu, navigate to **SCP**, and then click the **Routing Options** tab.
- From the left navigation menu, click the **Routing Config Set** tab.
- In the Routing Config Set section, click **Edit** from the Actions column for the required service that must be modified.
- Enter or modify the required values as described in "Configuring Routing Config Set" and "Configuring Routing Options Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
- In the Reroute Condition List, configure the list of error codes for rerouting:
 - Click **Add** to add new status code.
 - Click **Edit** or **Delete** icon to edit or remove any existing error code from the reroute condition list.

6. Click **Save**.
7. Click **Cancel** to reset all the fields.

4.2.35 Configuring NFTypes-NFServices

Perform the following procedure to configure any new 3GPP defined NFs, custom NF types, and custom NF services in SCP.

1. From the left navigation pane, click the **SCP** tab, and then click the **NFTypes-NFServices** tab.
2. From the left navigation pane, click the **NFTypes-NFServices Config** tab.
3. In the **NF Service Data** section, do one of the following:
 - To add any new NF type or NF service, click **Add** and configure the following fields:

Table 4-65 Field Name

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Indicates the name of the new configuration that fetches configuration information for the newly added NF service.
NF Type	nfType	Indicates the name of the new NF type for which routing options are configured. This is either 3GPP defined NF type as per TS 29.510 or custom NF type.
NF Service Name	nfServiceName	Indicates the name of the new NF service for which routing options are configured. This is either 3GPP defined serviceName as per TS29.510 or any custom service name.
API Name	apiName	Indicates the unique API name across all records. In the absence of API Name , its value is automatically configured as NF Service Name . This must be configured if API Name and NF Service Name values are different.
Service Type	serviceType	Indicates the service type. When this field is blank, service type is automatically configured for both NOTIFICATION-MESSAGE-SERVICE and REQUEST-MESSAGE-SERVICE.
NF Role	nfRole	Describes the role of the configured NFType, such as a standard NF type, standard proxies, or custom-defined NF types or proxies. STANDARD_5G_NF: 3GPP defined NF. The default value if this attribute is absent in the configuration except SCP and SEPP. STANDARD_5G_NE: 3GPP defined Network Entity (NE). The default value for SCP and SEPP if this attribute is absent in the configuration. CUSTOM_5G_ROAMING_PROXY: Mandatory to be configured for any custom 5G roaming proxy. Note: Records of the same NF type cannot have different NF roles.

Table 4-65 (Cont.) Field Name

Field Name	REST API Message Body Parameter	Description
API Name Ax Heading	apiNameAxHeading	Configures the API Name Ax Heading field of Configuring Routing Options. The value of this field is the first part of the callback type values in the 3gpp-Sbi-Callback header in a notification message. For example, when nudm-uecm sends DeregistrationNotification, then callback type value in 3gpp-Sbi-Callback header will have Nudm_UECM_DeregistrationNotification. Where Nudm_UECM is the apiNameAxHeading and DeregistrationNotification is callback service operation. Validations: – Empty and null values are allowed. – Default entries are populated for all supported 3GPP NFTypes. – If the value of this parameter is not provided, the API attempts to populate it from a static YAML file, provided that apiName is configured. – API allows the configuration of this parameter even when serviceName is set to noservice. – The API returns 400 responses if the following values are configured: * a duplicate value that is already configured in SCP for a different NFType-NFService. * a reserved value for a different 3GPP NF irrespective of whether the specified NF is supported by SCP or is currently registered using the NFType-NFService REST API. The reserved value for NFs is taken from the static YAML file. * a value not aligned to the allowed regex of alpha-numeric, hyphen, and underscore characters. * a value for SCP and SEPP NFs.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

For more information about the above mentioned fields, see "Configuring NFTypes-NFServices" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To edit or remove any existing NF service data, select an NF type or NF service from the Config Name column, and click the corresponding **Edit** or **Delete** icon.
4. Click **Save**.
 5. To retrieve the query parameters, from the left navigation pane, click the **NFTypes-NFServices Config Query** tab.
 6. In the **Query Parameters** field, enter the query parameter, such as nftype=UDM, and click **Get**.

Response and request configuration information appears in **Response** and **Request** fields.

4.2.36 Configuring NF Service Feature Config

Perform the following procedure to configure NF service level features.

1. From the left navigation pane, click the SCP tab, and then click the NF Service Features tab.
2. From the left navigation pane, click the NF Service Config tab.
3. In the NF Service Config section, do one of the following:
 - To add any new NF service, click **Add** and configure the following fields:

Table 4-66 Field Name

Field Name	Description
Config Name	Unique configName key to identify the record. Number of characters is 256. Allowed character combinations should be alpha-numeric, hyphen, and underscore.
NF Type	The NF type for which routing options are configured. This is either 3GPP defined NFType as per TS 29.510 or custom NFType. The '*' value is accepted to indicate any match.
NF Service Name	The NF service name for which routing options are configured. This is either 3GPP defined serviceName as per TS29.510 or any custom service name. If a particular NFType does not have NF Service, the '*' keyword should be provided for this field. The '*' value is accepted to indicate any match.
NF Service Config Set Name	Indicates available config name records. For more information, see the nfServiceConfigSetName parameter in "Configuring NF Service Feature Config" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i> .
Created Timestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

For more information about the above mentioned fields, see "Configuring NF Service Feature Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To edit or remove any existing NF service, select an NF service from the Config Name column, and click the corresponding **Edit** or **Delete** icon.
4. Click **Save**.
 5. To retrieve the query parameters, from the left navigation pane, click the NF Service Config Query tab.
 6. In the **Query Parameters** field, enter the query parameter, such as nftype=UDM, and click **Get**.

Response and request configuration information appears in **Response** and **Request** fields.

4.2.37 Configuring NF Service Config Set

Perform the following procedure to configure service level features. This configuration is mapped with **NF Type** and **NF Service Name** combination as described in [Configuring NF Service Feature Config](#).

1. From the left navigation menu, navigate to **SCP**, and then click the NF Service Features tab.
2. From the left navigation menu, click the NF Service Config Set tab.
3. In the NF Service Config Set section, do one of the following:
 - Click **Add** to configure a new service level feature using the following fields:

Table 4-67 Add NF Service Config Set

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Indicates a unique configuration name key to identify record.
NF Service Config Set Data		
Default Priority	defaultPriority	Priority (relative to other NF Services of the same type) in the range of 0-65535, to be used for NF Service selection. The lower values indicate a higher priority.
Default Capacity	defaultPriority	Priority (relative to other NF Services of the same type) in the range of 0-65535, to be used for NF Service selection.
Alt Routing Dns Srv Mode Supported	altRoutingDnsSrvModeSupported	Indicates whether alternate routing is supported using DNS SRV.
Load Based Congestion Control Enabled	loadBasedCongestionControlEnabled	Enables or disables congestion control for the associated service.
NF Service Load Based Congestion Control Cfg	nfServiceLoadBasedCongestionControlCfg	Name of the rule holding the configuration of congestion control. Based on the configuration under this rule, congestion control will be applied.
CB Enabled	cbEnabled	Enables or disables circuit breaking for the associated service.
CB Rule Name	cbRuleName	Name of the rule holding the configuration of circuit breaking. Based on the configuration under this rule, circuit breaking is activated.
OD Enabled	odEnabled	Enables or disables the Outlier Detection feature.
OD Rule Name	odRuleName	Name of the rule holding the configuration of Outlier Detection. Based on the configuration under this rule, the Outlier Detection is activated.
OCI Enabled	ociEnabled	Enables or disables OCI for the associated service.
OCI Rule Name	ociRuleName	Name of the rule holding the configuration of OCI. Based on the configuration under this rule, OCI is activated.
Canary Release Enabled	canaryReleaseEnabled	Enables or disables canary traffic for the associated service.
Canary Release Config Name	canaryReleaseConfigName	Name of the rule holding the configuration of canary traffic. Based on the configuration under this rule, canary traffic routing is activated.
Next Hop Proxy	nextHopProxy	Defines the NF service configuration name, which holds a reference to the service-specific configuration to be applied when routing to the next hop proxy. Click Add to configure NF type and NF service in the displayed dialog box.
Next Hop Roaming Proxy	nextHopRoamingProxy	Defines the NF service configuration name, which holds a reference to the service-specific configuration to be applied when routing to the next hop roaming proxy. Click Add to configure NF type and NF service in the displayed dialog box.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

Table 4-67 (Cont.) Add NF Service Config Set

Field Name	REST API Message Body Parameter	Description
Save	-	Saves the configured values.

- To modified any existing configuration, select a service type from the Config Name column and click the corresponding **Edit** icon.

Enter or modify the required values for the fields as described in "Configuring NF Service Feature Config Set" and "Configuring NF Service Feature Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- Click **Save**.

4.2.38 Configuring Next Hop Proxy and Roaming Proxy NF Service Config

Perform the following procedure to manage congestion control for the associated service on the next hop proxy and roaming proxy.

- From the left navigation pane, click the **SCP** tab, and then click the **NF Service Features** tab.
- To enable congestion control for the associated service on the next hop roaming proxy, from the left navigation pane, click the **Next Hop Roaming Proxy NF Service Config** tab.
 - In the Next Hop Roaming Proxy NF Service Config section, do one of the following:
 - To add a new configuration, click **Add** and configure the following fields:

Table 4-68 Add Next Hop Roaming Proxy NF Service Config

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Indicates a unique configuration name key to identify record.
Load Based Congestion Control Enabled	loadBasedCongestionControlEnabled	Enables or disables congestion control for the associated service on the next hop roaming proxy.
NF Service Load Based Congestion Control Cfg:	nfServiceLoadBasedCongestionControlCfg	Indicates the name of the rule that holds the congestion control configuration. Based on the settings defined in this rule, congestion control is applied to the next hop roaming proxy.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

For more information about the above mentioned fields, see "Configuring Next Hop Roaming Proxy NF Service Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To edit or remove any existing configuration, select a configuration from the Config Name column, and click the corresponding **Edit** or **Delete** icon.
- Click **Save**.

4. To enable congestion control for the associated service on the next hop proxy, from the left navigation pane, click the **Next Hop Proxy NF Service Config** tab.
5. In the Next Hop Proxy NF Service Config section, do one of the following:
 - To add a new configuration, click **Add** and configure the following fields:

Table 4-69 Add Next Proxy NF Service Config

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Indicates a unique configuration name key to identify record.
Load Based Congestion Control Enabled	loadBasedCongestionControlEnabled	Enables or disables congestion control for the associated service on the next hop proxy.
NF Service Load Based Congestion Control Cfg:	nfServiceLoadBasedCongestionControlCfg	Indicates the name of the rule that holds the congestion control configuration. Based on the settings defined in this rule, congestion control is applied to the next hop proxy.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

For more information about the above mentioned fields, see "Configuring Next Hop Proxy NF Service Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To edit or remove any existing configuration, select a configuration from the Config Name column, and click the corresponding **Edit** or **Delete** icon.

4.2.39 Circuit Breaking Configurations

Perform the following procedure to configure circuit breaking data.

1. From the left navigation menu, navigate to **SCP**, and then click the **Circuit Breaking** tab.
2. In the Circuit Breaking section, click **Edit** icon from the Actions column for the required service that must be modified.
The Edit Circuit Breaking screen appears.

Figure 4-68 Edit Circuit Breaking

The screenshot shows the 'Edit Circuit Breaking' interface in the Oracle CNC Console. The left sidebar contains a list of navigation items: SCP, Alternate NF Group, Canary Release, Circuit Breaking, Congestion Control, Consumer Info Configurati..., Error Profile, Global Options, Mediation, NF Rule Profile, and NRF Configuration. The main panel is titled 'Edit Circuit Breaking' and displays the 'Rule Name' as 'defaultRule'. Under the 'Circuit Breaking Configuration Data' section, the 'HTTP2 Max Requests' field is set to '1000'. 'Save' and 'Cancel' buttons are located at the bottom right of the configuration area.

3. In the **HTTP2 Max Requests** field, set the maximum number of requests SCP routes to an NF service instance (peer destination) and waiting for their responses before stopping further routing requests to it. The maximum allowed value is 1000.
4. Enter or modify the required values as described in "Circuit Breaking Configurations" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.
5. Click **Save**.
6. Click **Cancel** to reset the field.

4.2.40 Viewing SCP Feature Status

Perform the following procedure to fetch the runtime status of NRF migration task.

1. From the left navigation pane, click the **SCP** tab, and then click the **SCP Feature Status** tab.
2. On the SCP Feature Status page, the following columns display the SCP feature status.

Table 4-70 SCP Feature Status

Column Name	Description
Feature Name	Displays the names of the features, such as <code>nrf_bootstrap_info</code> .
Admin State	Displays the admin state of the feature. Possible statuses are mentioned below: - ENABLED: This indicates that the user has enabled the feature. - DISABLED: This indicates that the user has disabled the feature.


Table 4-70 (Cont.) SCP Feature Status

Column Name	Description
Runtime Status	Displays the current runtime status of the feature. Possible statuses are mentioned below: • DISABLED: This indicates that the feature is disabled. For example, in the <code>nrf_bootstrap_info</code> feature, this state means SCP is running with a statically configured NRF. If the user has changed the 'Admin State' from ENABLED to DISABLED, this state means the feature is successfully disabled. • IN_PROGRESS: This indicates the enabling or disabling of the feature is currently in progress when the 'Admin State' is set to ENABLED or DISABLED. For example, in the <code>nrf_bootstrap_info</code> feature, when the 'Admin State' is ENABLED, the migration from static to DNS SRV based NRF topology is in progress. In the <code>nrf_bootstrap_info</code> feature, when the 'Admin State' is DISABLED, the migration from a DNS SRV based NRF topology to static NRF topology is in progress. • FAILED_RETRY: This indicates that the process of enabling or disabling the feature (as indicated by the 'Admin State') has encountered failure and is undergoing retries. For example, in the <code>nrf_bootstrap_info</code> feature, this state means either of the migration tasks has failed and going through retries. • ENABLED: This indicates the feature is successfully enabled. For example, in the <code>nrf_bootstrap_info</code> feature, this state means the migration from static to a DNS SRV based NRF topology is successful.
Creation Timestamp	Displays the time of creation of the event, for example, <code>creationTimestamp</code> : "2021-05-26T01:17:15.000+00:00"
Update Timestamp	Displays the time of updation of the event, for example, <code>creationTimestamp</code> : "2021-05-26T06:24:15.000+00:00"

4.2.41 Get NF Discovery Response Cache Configuration Data

Perform the following procedure to get the delegated discovery response caching configuration data using Cloud Native Configuration Console (CNC Console).

1. Log in to the CNC Console using your login credentials as described in *Oracle Communications Cloud Native Core, Service Communication Proxy User Guide*.
2. On the CNC Console Home page, in the upper pane, select the required SCP instance from the **Please Select Instance** drop-down list.
3. From the left navigation pane, click the **SCP** tab, and then click the **NF Discovery Response Cache Configuration** tab. The SCP Features section displays the list of two subtabs to be configured using the CNC Console:
 - a. NF Discovery Response Cache Configuration
 - b. NF Discovery Response Cache Configuration Data
4. In the **NF Discovery Response Cache Configuration Data** subtab, click **Get** to retrieve NF discovery cache configuration data based on the query parameters.

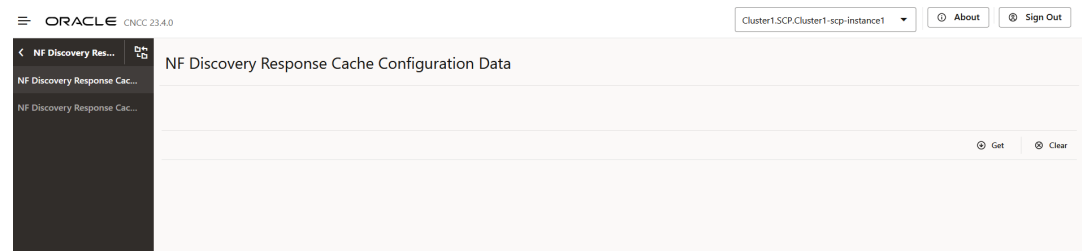Figure 4-69 NF Discovery Response Cache Configuration Data**Table 4-71 Button and Field Description**

Button and Field Names	Description
Get	Retrieves NF discovery response cache configuration data. You can modify this data using the Edit button.
Clear	Refreshes the existing screen by removing the data.

4.2.42 Configuring NF Profile Level Attribute

Perform the following procedure to configure NF profile level attributes for a specific NfType. These configurations are used in notification alternative requests.

1. From the left navigation pane, click the **SCP** tab, and then click the **NF Profile Level Attribute** tab.
2. From the left navigation pane, click the **NF Profile Level Attribute Configuration** tab.
3. To modify an existing configuration, select the configuration name from the **Config Name** column and click one of the following options for the corresponding configuration name:
 - **Edit**: Opens the Edit NF Profile Level Attribute Configuration Data dialog box to make modifications to the existing values of the fields. If you want to save your changes, click **Save**.
 - **Delete**: Removes the existing configuration from the **Config Name** list.
4. In the NF Profile Level Attribute Configuration section, click **Add** to add new DNS SRV and notification attributes.
5. In the Add NF Profile Level Attribute Configuration section, configure the following fields:

Table 4-72 Field Name

Field Name	Description
Config Name	Indicates unique configuration name to configure the NF profile level attribute configuration. The allowed values must be alphanumeric with hyphen and underscore special characters. Example: defaultNfProfileLevelAttrConfig
NF Type	Describes NfType to which this configuration is applicable. Default value: * * indicates all valid NF types.

Table 4-72 (Cont.) Field Name

Field Name	Description
Nf Instance Ids List	Indicates configuration list of nfInstance IDs separated by comma. When nfInstaceld is provided, it is used with nfType to extract the missing profile level data to be used while processing NF profiles for creating rules. When nfInstanceID is not provided, it is automatically set to '*'. Then, this configuration is applicable for any NF instance of a given NFType. The allowed values must be alphanumeric with hyphen and underscore special characters. Default value: * * indicates all valid NF instance IDs.
NF Profile Level Attr Config Data Name	Indicates an NF profile level attribute configuration data item that is already configured. When SCP processes NF profiles, relevant NF profile level attribute configuration data items are selected based on nfType or nfInstanceID combinations, and they are used for creating default rules. Then, those default rules will be used for routing and alternate routing of notification requests when the service name is unknown. Default value: defaultNfProfileLevelAttrConfigData
Save	Saves the configured values of all the fields.
Cancel	Exits from the current configuration page.

4.2.43 Configuring NF Profile Level Attribute Configuration Data

Perform the following procedure to configure NF profile level attribute configurations data. These configurations are used in notification alternative requests when NF profile data is unavailable.

1. From the left navigation pane, click the **SCP** tab, and then click the **NF Profile Level Attribute** tab.
2. From the left navigation pane, click the **NF Profile Level Attribute Configuration Data** tab.
3. To modify an existing configuration, select the configuration name from the **Config Name** column and click one of the following options for the corresponding configuration name:
 - **Edit**: Opens the Edit NF Profile Level Attribute Configuration Data dialog box to make modifications to the existing values of the fields. If you want to save your changes, click **Save**.
 - **Delete**: Removes the existing configuration from the **Config Name** list.
4. In the NF Profile Level Attribute Configuration Data section, click **Add** to add new DNS SRV and notification attributes.
5. In the Add NF Profile Level Attribute Configuration Data section, configure the following fields:

Table 4-73 Field Name

Field Name	Description
Config Name	Indicates unique configuration name to configure the NF profile level attribute configuration data. The default value cannot be deleted, but it can be modified. The allowed values must be alphanumeric with hyphen and underscore special characters. Example: defaultNfProfileLevelAttrConfigData
Dns Srv	This subsection provides information about DNS SRV scheme and port.
Scheme	Defines the default scheme to form the query for DNS SRV profile level FQDN. Default value: https Range: http or https
Port Preference	Defines the path to retrieve the port values either from the DNS SRV record or from the configured notification attributes. Default value: SRV_RECORD Range: SRV_RECORD or STATIC_CONFIG - STATIC_CONFIG: Uses static configuration defined in notificationAttributes.port - SRV_RECORD: Uses port from the DNS SRV record.
Notification Attributes	This subsection provides information about notification attributes such as scheme, port, capacity, and priority, to create profile level default service objects.
Scheme	Defines the scheme to be used while creating default routing rules for notification requests when the scheme is not provided in the NF profile at profile level. Default value: http Range: http or https
Port	Defines the port to be used while creating default routing rules for notification request when the port is not provided in the NF profile at profile level. Default value: 80 Range: 1-65535
Capacity	Defines the capacity to be used while creating default routing rules for notification requests when the capacity is not provided in the NF profile at profile level. Default value: 65535 Range: 0-65535
Priority	Defines the priority to be used while creating default routing rules for notification requests when the priority is not provided in the NF profile at profile level. Default value: 1 Range: 0-65535
Save	Saves the configured values of all the fields.
Cancel	Exits from the current configuration page.


4.2.44 Configuring NF Delegated Discovery Response Cache

Perform the following procedure to create, edit, and delete the rules for delegated discovery response caching configuration using the Cloud Native Configuration Console (CNC Console).

1. Log in to the CNC Console using your login credentials as described in *Oracle Communications Cloud Native Core, Service Communication Proxy User Guide*.
2. On the CNC Console Home page, in the upper pane, select the required SCP instance from the **Please Select Instance** drop-down list.

3. From the left navigation pane, click the **SCP** tab, and then click the **NF Discovery Response Cache Configuration** tab. The SCP Features section displays the list of two subtabs to be configured using the CNC Console:
 - a. NF Discovery Response Cache Configuration
 - b. NF Discovery Response Cache Configuration Data
4. From the left navigation pane, click the **NF Discovery Response Cache Configuration** subtab.
5. The **NF Discovery Response Cache Configuration** screen displays a list of rules saved in database.

Figure 4-70 NF Discovery Response Cache Configuration

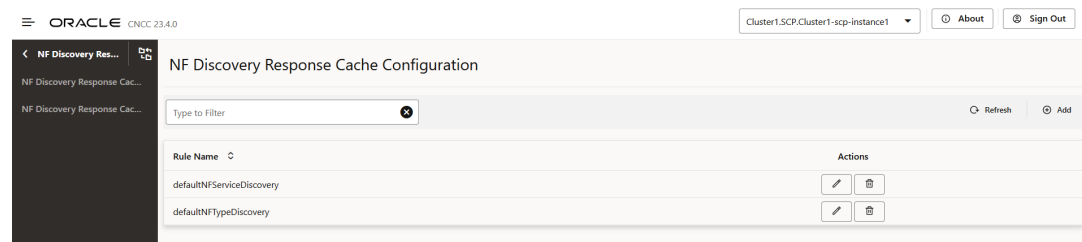

6. Click **Add** to create NF discovery response cache configuration rule. The **Add NF Discovery Response Cache Configuration Rule** screen allows you to configure the fields to create new rule as described in the following table:

Table 4-74 Field Description

Field Names	Description
Rule Name	Indicates the name of the rule. This value should be unique.
Target NF Type	Indicates the NF type of producer for which delegated discovery is being made. The allowed values for this field are: * : This value denotes all the valid NF types. - or - a valid NF type that SCP supports.
Service Names	Indicates the list of service names supported by producer NF for which delegated discovery is being made. The allowed values for this field are: * : This value denotes all the service names for that target NF type. - or - a valid NF service that a NF type supports.
Exclude Discovery Query Parameters	Indicates the list of Exclude Query Info objects. Maximum size of this list is 20.

Note

For more information about valid NF type and services supported by SCP, see [Natively Supported NF Types and Services](#) chapter in the *Oracle Communications Cloud Native Core, Service Communication Proxy User Guide*.

7. In the **Exclude Discovery Query Parameters** section, click **Add** to define the query header to exclude as described in the following table:

Table 4-75 Field Description

Field	Description
Exclude Query Info	Exclude Query Info has one field called query Header. The value of this query header is one of the query parameters that is forwarded along with the discovery request to NRF.
Query Header	Indicates the query parameters that is forwarded along with the discovery request to NRF. The allowed values for this field are: • None: This value denotes that caching is done for all the discovery responses. • *: This value denotes that caching will not be done for all the discovery responses. • SubscriberIds: An UE ID-related NF discovery query parameters. • Supported Query Parameters: The query parameters that is forwarded along with the discovery request to NRF. For more information, see 'Supported Query Parameters' chapter.

The following table lists the eight subscriber IDs covered by the keyword "SubscriberIds":

Table 4-76 SubscriberIds

SubscriberIds	Description
supi	If included, this Information Element (IE) shall contain the SUPI of the requester UE to search for an appropriate NF. SUPI may be included if the target NF type is "PCF," "CHF," "AUSF," "UDM," or "UDR."
ue-ipv4-address	The IPv4 address of the UE for which a BSF or P-CSCF needs to be discovered.
ip-domain	The IPv4 address domain of the UE for which a BSF needs to be discovered.
ue-ipv6-prefix	The IPv6 prefix of the UE for which a BSF or P-CSCF needs to be discovered.
gpsi	If included, this IE shall contain the GPSI of the requester UE to search for an appropriate NF. GPSI may be included if the target NF type is "CHF," "PCF," "UDM," or "UDR."
external-group-identity	If included, this IE shall contain the external group identifier of the requester UE to search for an appropriate NF. This may be included if the target NF type is "UDM" or "UDR."
routing-indicator	Routing indicator information that allows to route network signaling with SUCI (see 3GPP 23.003 [12]) to an AUSF and UDM instance capable of serving the subscriber. May be included if the target NF type is "AUSF" or "UDM." Pattern: "^[0-9]{1,4}\$"
msisdn	If included, this IE shall contain the external group identifier of the requester UE to search for an appropriate NF. This may be included if the target NF type is "UDM" or "UDR."

8. Click **Add** to add the created rules.
9. Click **Remove** to remove the created or existing rules.
10. Click **Save** to save the updates.
11. Click **Cancel** to reset all the fields.
12. Click the **Edit** icon to edit the existing rule.
The Edit NF Discovery Response Cache Configuration Rule screen allows you to configure the fields as described in the following table:

Table 4-77 Field Description

Field	Description
Rule Name	Indicates the name of the rule. This value should be unique.
Target NF Type	Indicates the NF type of producer for which delegated discovery is being made. The default value for this field is *, which denotes that caching will not be done for all the discovery responses.
Service Names	Indicates the list of service names supported by producer NF for which delegated discovery is being made. The default value for this field is *, which denotes that caching will not be done for all the discovery responses.
Exclude Discovery Query Parameters	Indicates the list of ExcludeQueryInfo objects. Maximum size of this list is 20.

Note

- **defaultNFTypeDiscovery** rule is applicable to any Model D request where discovery is happening without service names (in these requests, the 3gpp-sbi-discovery-service-names header is not present) and no other custom rule match is found. For this rule, caching will not happen for the list of query headers mentioned in the ExcludeQueryInfo.
- **defaultNFServiceDiscovery** rule is applicable to a Model D request where the request 3gpp-sbi-discovery-service-names header is also present in the incoming request and no other custom rule match is found. For this rule, caching will not happen for the list of query headers mentioned in the ExcludeQueryInfo.
- You cannot delete the default rules, but the exclude query info for these rules can be edited.

13. Click **Save**.

Note

By default, users can configure up to 100 rules using this API.

4.2.45 Configuring Roaming Proxy and Proxy Selection Routing Mode

Perform the following procedure to configure the following:

- Roaming Proxy Support
 - Roaming Proxy Info
 - Proxy Selection Routing Mode
 - Roaming Proxy Selection Info
1. From the left navigation pane, click the **SCP** tab, and then click the **Roaming Proxy** tab.
 2. From the left navigation pane, click the **Roaming Proxy Support** tab.
 3. In the Roaming Proxy Support section, do one of the following:
 - To add a new configuration, click **Add** and configure the following fields:

Table 4-78 Roaming Proxy Support

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Indicates the name of the new configuration.
NF Type	nfType	Indicates the NF type of the custom roaming proxy. Only NF types with the NF role set to "CUSTOM_5G_ROAMING_PROXY" are allowed. The NF type cannot be updated for an existing configuration. The NF type must be unique across all records. Range: All the NF Types configured in the nfTypes-nfServices REST API with NF role as "CUSTOM_5G_ROAMING_PROXY".
Scheme		
Json Pointer	jsonPointer	Indicates a JSON pointer used to extract a value from a specific location within the NF profile. A string is expected at the given JSON pointer in the registered NF profile.
Default Value	defaultValue	If the specified location in the Default Value field does not contain a value, Scheme should be determined from the following sources in the following order: a. proxy-info/roaming-proxy-info REST API b. defaultValue
Port		
Json Pointer	jsonPointer	Indicates a JSON pointer used to extract a value from a specific location within the NF profile. A string is expected at the given JSON pointer in the registered NF profile.
Default Value	defaultValue	If the specified location in the Default Value field does not contain a value, Scheme should be determined from the following sources in the following order: a. proxy-info/roaming-proxy-info REST API b. defaultValue
Proxy Ports		
Json Pointer	jsonPointer	Indicates a JSON pointer used to extract a value from a specific location within the NF profile.
Http	http	Indicates the Http port value. Either http or https or both should be provided.
Https	https	Indicates the Https port value. Either http, https, or both must be provided. If both https and http are provided, preference is given to https, and the HTTPS port is used for routing.
Remote PLMN List	remotePlmnList	Indicates the list of PLMN IDs served by the roaming proxy NF instance. It is a JSON pointer used to extract the value from a specific location within the NF profile. If the value is missing at the specified JSON pointer location for this attribute, it indicates that any PLMN serves all PLMNs. An array of PLMN IDs is expected at the given JSON pointer in the registered NF profile.
Api Prefix	apiPrefix	Indicates the API prefix of the roaming proxy NF instance. It is a JSON pointer used to extract the value from a specific location within the NF profile. A string is expected at the given JSON pointer in the registered NF profile.
PLMN List	plmnList	Indicates the list of PLMN IDs of the roaming proxy NF instance. It is a JSON pointer used to extract the value from a specific location within the NF profile. An array of PLMN IDs is expected at the given JSON pointer in the registered NF profile.

Table 4-78 (Cont.) Roaming Proxy Support

Field Name	REST API Message Body Parameter	Description
FQDN	-	Indicates the FQDN of the server.
IPv4 Addresses	ipv4Addresses	Indicates the IPv4 addresses of the roaming proxy NF instance. It is a JSON pointer used to extract the value from a specific location within the NF profile. A string is expected at the given JSON pointer in the registered NF profile.
IPv6 Addresses	ipv6Addresses	Indicates the IPv6 addresses of the roaming proxy NF instance. It is a JSON pointer used to extract the value from a specific location within the NF profile. A string is expected at the given JSON pointer in the registered NF profile.
Priority	priority	Indicates the priority of the roaming proxy NF instance. The priority is relative to other roaming proxy instances and is used for roaming proxy selection. Lower values indicate a higher priority. It is a JSON pointer used to extract the value from a specific location within the NF profile. An integer in the range of 0 to 65535 is expected at the given JSON pointer in the registered NF profile.
Capacity	capacity	Indicates the capacity of the roaming proxy NF instance. The capacity is expressed as a weight relative to other roaming proxy instances. It is a JSON pointer used to extract the value from a specific location within the NF profile. An integer in the range of 0 to 65535 is expected at the given JSON pointer in the registered NF profile.
Load	load	Indicates the dynamic load information of the roaming proxy NF instance. It represents the current load percentage of the instance. It is a JSON pointer used to extract the value from a specific location within the NF profile. An integer in the range of 0 to 100 is expected at the given JSON pointer in the registered NF profile.
Load Time Stamp	loadTimeStamp	Indicates the point in time at which the latest load information, sent by the NF in the "load" attribute of the NF profile, was generated at the NF instance. It is a JSON pointer used to extract the value from a specific location within the NF profile. A DateTime is expected at the given JSON pointer in the registered NF profile.
Locality	locality	Indicates the locality of the roaming proxy NF instance. It is a JSON pointer used to extract the value from a specific location within the NF profile. A string is expected at the given JSON pointer in the registered NF profile.
LCH Support Indicator	lcHSupportInd	Indicates whether the NF supports load control based on the LCI header. It is a JSON pointer used to extract the value from a specific location within the NF profile. A boolean parameter is expected at the given JSON pointer in the registered NF profile.
OLCH Support Indicator	olchSupportInd	Indicates whether the NF supports overload control based on the OCI header. It is a JSON pointer used to extract the value from a specific location within the NF profile.
VIA		
Format	format	Defines the structure of the header with different NF information elements. Duplicate values are not allowed in the array. NFTYPE is a mandatory element of the header format and must be placed at the first position. Valid examples are as follows: [NFTYPE, NFINSTANCEID] [NFTYPE, FQDN]
Separator	separator	Specifies the delimiter used to join the elements of the headers defined in the format.
Server		

Table 4-78 (Cont.) Roaming Proxy Support

Field Name	REST API Message Body Parameter	Description
Format	format	Defines the structure of the header with different NF information elements. Duplicate values are not allowed in the array. NFTYPE is a mandatory element of the header format and must be placed at the first position. Valid examples are as follows: – [NFTYPE, NFINSTANCEID] – [NFTYPE, FQDN]
Separator	separator	Specifies the delimiter used to join the elements of the headers defined in the format.
3gpp-Sbi-Lci		
LC Scope	lcScope	Specifies the format of the lcScope in the 3GPP-SBI-LCI header.
3gpp-Sbi-Oci		
OLC Scope	olcScope	Specifies the format of the olcScope in the 3GPP-SBI-OCI header.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.

For more information about the above mentioned fields, see "Configuring Roaming Proxy Support Config" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- To edit or remove any existing configuration, select a configuration from the Config Name column, and click the corresponding **Edit** or **Delete** icon.
4. Click **Save**.
 5. To retrieve the query parameters, from the left navigation pane, click the **Roaming Proxy Support Query** tab.
 - In the **Query Parameters** field, enter the query parameter, such as nfType, and click **Get**.

Response and request configuration information appears in **Response** and **Request** fields.

6. To add roaming proxy info, from the left navigation pane, click the **Roaming Proxy Info** tab.
 - On the Roaming Proxy Info page, click **Add** and configure the following fields:

Table 4-79 Roaming Proxy Info

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Indicates the name of the new configuration.
Roaming Proxy Info Data		
NF Type	nfType	Specifies the NF type of the custom roaming proxy. Only NF types with the NF role set to CUSTOM_5G_ROAMING_PROXY are allowed. The NF type cannot be updated for an existing configuration.
NF Instance ID	nfInstanceId	Specifies the NF instance ID of the custom roaming proxy NF instance.
Roaming Proxy Info		

Table 4-79 (Cont.) Roaming Proxy Info

Field Name	REST API Message Body Parameter	Description
Scheme	scheme	Specifies the HTTP scheme of the roaming proxy NF instance. Either proxyPorts or a combination of scheme and port must be configured for the roaming proxy. If proxy ports are not present in the configuration, then both scheme and port are mandatory.
Port	port	Specifies the port of the roaming proxy NF instance. Either proxyPorts or a combination of scheme and port must be configured for the roaming proxy. If proxy ports are not present in the configuration, then both scheme and port are mandatory.
Proxy Ports		
Http	http	Specifies the HTTP port value to be used. If neither HTTP nor HTTPS is provided, an error is returned. If only HTTP is provided and HTTPS is not, the response includes only the HTTP field, and conversely.
Https	https	Specifies the HTTPS port value to be used. If neither HTTP nor HTTPS values are provided, an error is returned. If only HTTPS is provided and HTTP is not, the response includes only the HTTPS field, and vice versa.
Remote PLMN List		
MCC	mcc	Indicates Mobile Country Code.
MNC	mnc	Indicates Mobile Network Code
Add	-	Adds remote PLMN list by configuring MCC and MNC fields.
Save	-	Saves the configured values.

For more information about the above mentioned fields, see "Configuring Roaming Proxy Info" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

7. To add proxy selection routing mode, from the left navigation pane, click the **Proxy Selection Routing Mode** tab.
 - On the Proxy Selection Routing Mode page, click **Add** and configure the following fields:

Table 4-80 Proxy Selection Routing Mode

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Indicates the name of the new configuration.
isRoamingRequest	isRoamingRequest	Identifies roaming requests.
Remote PLMN List		
MCC	mcc	Indicates Mobile Country Code.
MNC	mnc	Indicates Mobile Network Code
Add	-	Adds remote PLMN list by configuring MCC and MNC fields.

Table 4-80 (Cont.) Proxy Selection Routing Mode

Field Name	REST API Message Body Parameter	Description
Next Hop Proxy Routing Mode	nextHopProxyRoutingMode	Indicates a prioritized list of proxy NF types that are selected at SCP for routing roaming requests. If all available proxies of a configured NF type are unable to serve the request, SCP falls back to the next configured proxy NF type for selection and routing. Note: Only one value of roaming proxy is allowed in this list: • SEPP • *
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

For more information about the above mentioned fields, see "Configuring Proxy Selection Routing Mode" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

8. To check the roaming proxy selection information, from the left navigation pane, click the **Roaming Proxy Selection Info** tab.
 - On the Roaming Proxy Selection Info page, to edit, delete, or clear the data, click the required buttons as described in the following table:

Table 4-81 Roaming Proxy Selection Info

Field Name	Description
Config Name	A unique key to identify records.
Get	Retrieves configuration data. You can modify this data using the Edit button.
Add	Adds new message requests in the Request field.
Edit	Modifies any existing data by updating mandatory query parameters in the Config Name field.
Delete	Removes any message request.
Clear	Refreshes the existing screen by removing the data.

9. To fetch the details of roaming proxy selection information, from the left navigation pane, click the **Roaming Proxy Selection Info - GetAll** tab.
Roaming Proxy Selection Info - GetAll provides parameters for discovery query creation which will be used for local discovery.
 - To add a new request, click **Get** and enter the request body information in the **Request** field.

4.2.46 Configuring IE Registry

Perform the following procedure to configure Information Element (IE) Registry and create a new custom discovery query parameter.

1. From the left navigation pane, click the **SCP** tab, and then click the **IE Registry** tab.

2. From the left navigation pane, click the **Discovery Query Param** tab, and then click **3gppDefined**.
3. In the 3gpp Defined Discovery Query Param section, do the following:
 - a. Select a query parameter from the **Parameter Name** column and click the corresponding **Edit** icon.
 - b. To modify the existing configuration, configure the following fields:

Table 4-82 3gpp Defined Discovery Query Param

Field Name	REST API Message Body Parameter	Description
Parameter Name	paramName	Indicates the name of the discovery query parameter defined in the configuration. It is a unique identifier for the record.
Data Type	dataType	Indicates the name of the data type of the query parameter, as defined in 3GPP Spec 29510 or in custom query parameters.
Description	description	Describes the query parameters. 3gpp-defined: Allows to update only the description of these query parameters. - Custom: If the parameter is used in other APIs, this updates only the description for custom query parameters. Otherwise, all parameter can be updated.
Validation Regex	validationRegex	Indicates regular expression that defines the query parameters during configuration.
Active Flag	isActive	Indicates whether the parameter is active. If it is active, it can be referenced in other APIs. Otherwise, an error is returned.
IE Type	ieType	The value of this field is 3GPP_DISCOVERY_QUERY_PARAM for 3GPP-defined query parameters and CUSTOM_DISCOVERY_QUERY_PARAM for custom query parameters.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

For more information about the above mentioned fields, see "Configuring IE Registry" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- c. Click **Save**.
4. To create a new custom discovery query parameter, do the following:
 - a. From the left navigation pane, click **Custom**.
 - b. In the Custom Discovery Query Param section, click **Add** and configure the following fields:

Table 4-83 Create New Custom Discovery Query Param

Field Name	REST API Message Body Parameter	Description
Parameter Name	paramName	Indicates the name of the discovery query parameter defined in the configuration. It is a unique identifier for the record.

Table 4-83 (Cont.) Create New Custom Discovery Query Param

Field Name	REST API Message Body Parameter	Description
Data Type	dataType	Indicates the name of the data type of the query parameter, as defined in 3GPP Spec 29510 or in custom query parameters.
Description	description	Describes the query parameters. 3gpp-defined: Allows to update only the description of these query parameters. - Custom: If the parameter is used in other APIs, this updates only the description for custom query parameters. Otherwise, all parameter can be updated.
Validation Regex	validationRegex	Indicates regular expression that defines the query parameters during configuration.
Active Flag	isActive	Indicates whether the parameter is active. If it is active, it can be referenced in other APIs. Otherwise, an error is returned.
IE Type	ieType	The value of this field is 3GPP_DISCOVERY_QUERY_PARAM for 3GPP-defined query parameters and CUSTOM_DISCOVERY_QUERY_PARAM for custom query parameters.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

For more information about the above mentioned fields, see "Configuring IE Registry" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- c. Click **Save**.
- d. If you want to edit an existing parameter, in the Custom Discovery Query Param section, select a query parameter and click the corresponding **Edit** icon from the **Actions** column.
- e. Modify the required fields on the displayed Edit Custom Discovery Query Param page.
- f. Click **Save**.

4.2.47 Configuring NF Topology Audit

Perform the following procedure to configure audit interval for each NRF set.

1. From the left navigation pane, click the **SCP** tab, and then click the **NF Topology Audit Configuration** tab.
2. On the NF Topology Audit Configuration page, click **Add** to create a new NF topology configuration.
3. On the Add NF Topology Audit Configuration section, configure the following fields:

Table 4-84 Adding NF Topology Audit Configuration

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Indicates the name provided to the configuration created in the DB for nfTopologyAuditCfg. The value is unique for each configuration.
NRF Set Id List	nrfSetIdList	Specifies the NRF set IDs to which the NF Topology Audit configuration applies. Note: - An NRF set ID can belong to only one custom configuration. - For an NRF set ID, the service applies the custom configuration if one exists. Otherwise, the service applies the default configuration.
Perform Audit	performAudit	Specifies whether to run scheduled audits for the NRF set IDs listed in NRF Set Id List .
Interval (in Sec)	intervalInSeconds	Specifies the interval between scheduled audit cycles for the configured NRF set IDs.
Rate Per NRF (Requests / Sec)	ratePerNRF	Specifies the maximum audit request rate, in requests per second, for NRF Management or Discovery services for each NRF set. Specifies an integer value in the supported range.

For more information about the above mentioned fields, see "Configuring NF Topology Audit" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

4. Click **Save**.
5. If you want to modify the existing configuration, on the NF Topology Audit Configuration page, click the edit icon for the corresponding configuration under the Config Name column.
 - a. Configure the required fields as described in [Table 4-84](#).
 - b. Enable the **Perform Audit** option to run scheduled audits for the NRF set IDs listed in **NRF Set Id List**.
 - c. Click **Save**.

4.2.48 Configuring Exception Config Set

Perform the following procedure to configure exception conditions.

1. From the left navigation pane, click the **SCP** tab, and then click the **Exception Config Set** tab.
2. On the Exception Config Set page, click **Add** to configure exception conditions.
3. On the Add Exception Config Set page, configure the following fields:

Table 4-85 Add Exception Config Set

Field Name	REST API Message Body Parameter	Description
Config Name	configName	Indicates a unique name of the exception config set. This name is used to identify and reference the exception handling configuration.
Exception Config Type	exceptionConfigType	Specifies the type of exception handling configuration being created.

Table 4-85 (Cont.) Add Exception Config Set

Field Name	REST API Message Body Parameter	Description
Exception Config Data	exceptionConfigData	Contains the list of exception handling rules defined for the selected Exception Config Type .
Exception Conditions	exceptionConditions	Indicates the list of conditions used to identify when an exception rule should be applied.
Action	action	Indicates the action to be taken when the configured exception conditions are matched.
Error Profile Name	errorProfile	Indicates the name of the error profile to be used when the selected action is SEND_ERROR_RESPONSE.
Add	-	Adds exception conditions. Click Add to configure the following fields for exception conditions: HTTP Status code or *: Indicates HTTP status codes. Cause: Indicates predefined reasons associated with the exception. This attribute accepts only application-defined values. If a user-defined explanation is required, this attribute must be set to CUSTOM. Action: Indicates the action to be taken when the configured exception conditions are matched.
Created Timestamp	createdTimestamp	Indicates the timestamp of the created record. This is not required in the request, but it is present in the response.
Updated Timestamp	updatedTimestamp	Indicates the timestamp of the updated record. This is not required in the request, but it is present in the response.
Save	-	Saves the configured values.

For more information about the above mentioned fields, see "Configuring Exception Config Set" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

4. To modify an existing configuration, on the Exception Config Set page, select a configuration name from the **Config Name** column and click the corresponding **Edit** icon.
 - a. On the Edit Exception Config Set page, modify the values of the required fields as described in [Table 4-85](#).
 - b. Click **Save**.

4.2.49 Configuring NF Group ID Retrieval

Perform the following procedure to configure an Information Element (IE).

1. From the left navigation pane, click the **SCP** tab, and then click the **NF Group ID Retrieval** tab.
2. To check the configuration rules, click the **NF GroupID Retrieval Config Rules** tab from the left navigation pane.
 - On the NF GroupID Retrieval Config Rules page, to edit, delete, or clear the data, click the required buttons as described in the following table:

Table 4-86 NF GroupID Retrieval Config Rules

Field Name	Description
Config Name	A unique key to identify records.

Table 4-86 (Cont.) NF GroupID Retrieval Config Rules

Field Name	Description
Get	Retrieves configuration data. You can modify this data using the Edit button.
Add	Adds new message requests in the Request field.
Edit	Modifies any existing data by updating mandatory query parameters in the Config Name field.
Delete	Removes any message request.
Clear	Refreshes the existing screen by removing the data.

3. To retrieve the query parameters, click the **NF Group Id Retrieval Config Query** tab from the left navigation pane.

- In the **Query Parameters** field, enter the query parameter, such as `nfType`, and click **Get**.

Response and request configuration information appears in the **Response** and **Request** fields.

4. To configure an Information Element (IE), click the **NF GroupID Retrieval IE Binding Info** tab.

- a. Click the **Edit** icon to configure IE list and dynamic IE list.
- b. In the IE List section, in the Static IE List table, click **Add** to add a new IE.
- c. In the displayed dialog box, configure the following fields:
 - **IE Name:** Indicates the name of the information element defined in the IE-Registry REST API.
 - **Cardinality:** Indicates whether **IE Name** can be configured as a single object or a list of objects. It is the name of the cardinality enumeration.
 - **IE Alias:** Indicates the other name for the same parameter, which can be used as JSON key in response body.

For more information about the above mentioned fields, see "Configuring IE Binding Info" in *Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide*.

- d. Click **Save**.

5

Metrics

This chapter provides information about newly introduced and updated metrics and its dimensions.

The following table describes the SCP metric types used to measure the health and performance of SCP and its core functionalities:

Table 5-1 Metric Type

Metric Type	Description
Counter	Represents the total number of occurrences of an event or traffic, such as measuring the total amount of traffic received and transmitted by SCP, and so on.
Gauge	Represents a single numerical value that changes randomly. This metric type is used to measure various parameters, such as SCP load values, memory usage, and so on.
Histogram	Represents the number of occurrences that fall into predefined intervals, or buckets, such as those used for measuring response times.

5.1 SCP OCI Metrics Dashboard

To upload the `ocscp_oci_metric_dashboard_26.1.201.zip` file on OCI Logging Analytics Dashboard Service, see *Oracle Communications Cloud Native Core, OCI Deployment Guide*. OCI does not support Grafana, OCI uses the Logging Analytics Dashboard Service for visualizing the metrics and logs.

5.2 Dimension Description

The following table provides information on Dimension of Metrics.

Table 5-2 SCP Dimension Descriptions

Dimension	Description
ocscp_nf_type	Includes the producer NF type that is extracted from the URI of the message. The sample values are UDM, PCF, AMF, and so on.
ocscp_nf_service_type	Service name of the producer NF in delegated discovery metrics. Includes the producer NF Service type that is extracted from the URI of the message. The sample values are nudm-uecm, nudm-sdm, scpc-notification, and so on. Note: - Notifications from NRF to scpc-notification will be pegged with the service type as scpc-notification. - The <code>ocscp_nf_service_type</code> dimension for notifications can be <code>n<nfType>-unknown</code> or <code>NA-unknown</code>, where <code><nfType></code> is any NF name.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
ocscp_req_msg_size	Indicates the request message size buckets. The sample values are 1(size < 1k bytes), 2 (1k < size < 2k bytes), 4 (2k < size < 4k), and so on.
ocscp_locality	Indicates the SCP site name or locality name with which SCP is deployed. The sample values are Loc6, Loc7, and so on.
ocscp_fqdn	Includes the FQDN of SCP, which is used to deploy SCP.
plmn_id	It represents the PLMN of the destination where the request needs to be routed.
ocscp_authority	Includes the authority of SCP. The sample value is FQDN:PORT or IP:PORT. Note: This dimension will get pegged only when it is enabled using <code>values.yaml</code> . <code>scpAuthorityMetricLabelDisabled: false</code>
ocscp_message_type	Includes the message type received at SCP. It can be of any of the following types: • SERVICE_SPECIFIC_REQUEST • NOTIFICATION_OR_CALLBACK_REQUEST
ocscp_consumer_host	Includes the consumer host details extracted from the user-agent header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats. Note: The <code>ocscp_consumer_host</code> dimension will include the value <code>OCSCP-INITIATED-MSG</code> only in the case of SCP self-generated requests. These requests can be identified based on the header (<code>x-ocscp-initiated-msg=true</code>).
ocscp_consumer_nf_instance_id	Includes the consumer NF Instance ID details extracted from the user-agent header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.
ocscp_consumer_nf_type	Includes consumer NF type details extracted from the user-agent header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.
ocscp_consumer_nf_unique_id	Includes the consumer NF's Unique ID details extracted from the user-agent header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.
ocscp_peer_nf_instance_id	NF Instance ID of the peer to which message (request or response) is routed. For requests, the NF instance ID is obtained from information on a known NF producer or consumer. For responses, the NF Instance ID is obtained from the User-Agent/XFCC header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
ocscp_peer_nf_service_type	NF service type of peer to which message (request or response) is routed. For requests, the NF service type is obtained from information on a known NF producer or consumer. For responses, service type is obtained from learned information about NF extracted from the User-Agent/XFCC header. SCP should be able to decode that particular format only if the user-agent header is available in certain allowed configurable formats.
action	Action taken ("error_sent" or "rerouted") on request throttling because of OCI enforcement.
scope	The OCI scope received in the OCI header.
auditMode	NRF service API used by SCPC-Audit when it communicates with NRF for profile discovery or profile management. The possible values are nnrf-disc and nnrf-nfm.
auditmethod	NRF service API used by the SCPC-Audit gauge. The possible values are nnrf-disc and nnrf-nfm.
auditType	Type of audit triggered by the audit microservice. It can be an on-demand audit or a regular audit, depending on what triggered the audit. Example: A change in TSI from local to NRF will trigger an on-demand audit. The possible values are "OnDemand" and "Scheduled".
bodyModified	This dimension is used to know if the response received from mediation has any changes in the body that is sent in the request towards mediation.
bucketKey	The key used to maintain the value of the message rate in egress or ingress rate limit functionality.
cause	The reason for the event's occurrence. The value can vary from one metric to another.
cca_consumer_nflInstanceId	The NF instance ID of the consumer sending the CCA header.
certificate_type	The type of certificate used, such as primary server, secondary server, etc.
certificate_type	Indicates the type of certificates that are about to expire. The following are the valid applicable certificate types: • 5G_SBI_SERVER_PRIMARY - Applicable for 5G SBI Server Primary certificate, used for Ingress traffic. • 5G_SBI_SERVER_SECONDARY - Applicable for 5G SBI Server Secondary certificate, used for Ingress traffic. • 5G_SBI_CLIENT_PRIMARY - Applicable for 5G SBI Client Primary certificate, used for Egress traffic. • 5G_SBI_CLIENT_SECONDARY - Applicable for 5G SBI Client Secondary certificate, used for Egress traffic. • 5G_SBI_TRAFFIC_FEED_PRIMARY - Applicable for 5G SBI Traffic Feed primary certificate, used for Data Director (kafka). • 5G_SBI_TRAFFIC_FEED_SECONDARY - Applicable for 5G SBI Traffic Feed secondary certificate, used for Data Director (kafka).

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
coherenceCluster	The name of the coherence cluster used in the SCP deployment.
configurationName	The name of the configuration that has changed.
cpu_level	The level for CPU utilization, whether it is under minor, major, or critical utilization levels based on the configurations.
dbOperation	The DB operation that happened on a DB table. Example: find, findAll, save, saveAll, get, count, delete, deleteAll.
destination	Indicates the destination SVC, like scpc-notification, scp-nrfproxy, and so on.
destination (TLS)	Contains the destination address details involved in HTTPS connection.
detail	This dimension contains details about the issue that has happened.
duplicateTargetFqdn	When a duplicate target fqdn is detected across different NRF SRV fqdns.
error-reason	Reason for ingress or egress connection failures.
errorType	The error reason that caused notification processing to fail.
eventName	Showing the migration state of the NRF DNS SRV feature. Possible values are: - FEATURE_ENABLED - START_NRF_RULE_PROCESSING
eventType	It shows the status of the egress requests on the Jetty client or the event type received in notification requests from NRF. This is used in different metrics, thus refer to the respective metric for interpretation.
failureReason	Reasons for the failure of the NRF DNS SRV feature migration.
failureReason (TLS)	Contains HTTPS connection failure reason (Handshake failure reason)
headerModified	Indicates whether any header is modified by the mediation service in response.
host_type	Indicates the host type used for sending the request. For example, "IP" or "FQDN".
http_method	Indicates the HTTP method of the request getting treatment for overload. For example, PUT, PATCH, POST, and so on.
interScpHost	Contains the host of the SCP to which the request is being sent.
is_from_local_cache	Defines whether the NRF discovery response is retrieved from local cache (true) or NRF (false)
is_inter_plmn	Defines whether NRF Delegated Discovery made is for inter plmn (true) or for intra plmn (false)
locality	The locality of the foreign NF.
lockEvent	The notification cache lock event (released or acquired)
msName	The name of the scp microservice.
nfInstanceId	The producer NF instance ID.
nfProfileProcessingStatus	The status of the notification profile processing.
nf_status	The status of NF, for example, REGISTERED.
nfType	The NF type, for example, UDM.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
notificationSource	Indicates the source of notification received at the Notification microservice. It can be NRF or some SCP microservice.
rule_name	Denotes the rule that matches one of the discovery headers in the excludeDiscoveryQuery List, and hence caching is skipped.
ocscp_producer_nf_type	Includes the producer NF type.
nrfHost	NRF FQDN or IP address configured for audit.
nrfRegionOrSetId	NRF region or SetId configured for audit
nrfSrvFqdn	NRF Fqdn configured in DNS SRV
ocscp_alterate_nf_end_point	Selected alternate producer NF's end point.
ocscp_alterate_producer_host	Selected alternate producer NF Host (FQDN or IP Address). The value of ocscp_alterate_producer_host can be the same as ocscp_primary_producer_fqdn if SCP selects the same routing destination during the second iteration in Mode 3 of the Enhanced Suspended State feature. During the first iteration, destinations with Registered NF status are considered for routing; during the second iteration, destinations with Suspended NF status are considered.
ocscp_alterate_producer_nf_instance_id	Selected alternate producer NF's instance Id.
ocscp_alterate_producer_service_instance_id	Selected alternate producer NF's service instance Id.
ocscp_alterate_route_type	Alternate routing mechanism selected. Possible values are: • DNS_SRV • STATIC_CONFIG • NF_SET • NF_DISCOVERY
ocscp_attempted_producers	List of attempted producers before sending back an error response to the consumer.
ocscp_sub	Requester NF instance ID in the oauth2 token request.
ocscp_aud	Target NF instance ID in the oauth2 token request.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
ocscp_cause	Traffic Feed Metrics: Provides information on the cause of traffic feed failures (for example, unreachable, noleader, incorrect data director configuration). Routing Metrics: Provides information on the cause of routing failures. (for example, UnknowHostException, Circuit Breaking) Rate Limit Metrics: Provides information on the cause for the rate limit not being applied (for example, configuration not found). Possible values for the ocscp_metric_5gsbi_upstream_destination_rejection_total metric are: • CircuitBreaking • OutlierDetection • NotRoutableNFState • ProducerPublishedCongestion • ProducerUnhealthy • UnHealthyandOutlieredSCP • InternalError: In case of exception in formation of egress URI.
ocscp_configured_egress_rate	Configured rate of egress rate limit for a NF.
ocscp_configured_ingress_rate	Configured rate of ingress rate limit for a NF.
ocscp_egress_rl_bucketkey	Key name for egress rate limit bucket.
ocscp_error_condition	Error Condition resulting in routing attempt failure.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
ocscp_error_group	Error group for error condition resulting in Routing Attempt Failure (for example, Destination webclient connection failure). Possible values: • NRFProxy Client Unknown Exception • Rate Limit initiated send response • Rule Engine - Rule match not found • Invalid Host • Not qualified for re routing • Rule Not found • Qualified for re routing • Destination webclient response timeout • Destination webclient Connection Failure • Destination webclient received a response from server • Internal Server Error • NRF Discovery Query Sent failed • No InterPlmn Host • Selected Destination Suspended • Service Entry not found for the given Host • binding attribute from defaultNotificationsSubscriptions not found • NRF Discovery Failure • Invalid Discovery key • Discovery response not found in cache • NF Discovery failed • Local Nf Discovery rules found matching not found • Local Nf Discovery rules not found • RouteToNrfRule not found • NRFProxy Client Response Timeout • NRFProxy Client Connection Failed • NRFProxy Client Unknown Exception • Destination webclient unkown exception • Mediation Client Response Timeout • Mediation Client Connection Failed • Mediation Client Unknown Exception • Discovery query parameter decoding failed • NRFProxy OAuth Client Response Timeout • NRFProxy OAuth Client Connection Failed • NRFProxy OAuth Client Unknown Exception • NRFProxy OAuth Client Internal Failure Received • NRFProxy Client Internal Failure Received • Destination URI composition failed • Destination search exhausted • Circuit Break detected • Rule Engine Producer not Found For Sepp After Discovery • Rule EngineCannot route as authority is of SCP • Rule Engine Rule match found, but no serving scp Note: There are different error status codes (5xx or 4xx) for different error groups. A few error groups are documented in

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
	this section, but additional error groups may exist depending on the error that occurs at SCP.
ocscp_ingress_rl_bucketkey	Key name for the ingress rate limit bucket.
ocscp_ingress_rl_headerformat	The User Agent header format used by SCP to extract consumer host information to apply an ingress rate limit.
ocscp_ingress_rl_headername	Headers used to apply the ingress rate limit.
ocscp_med_upstream_service_time	Time taken for mediation processing in milliseconds.
ocscp_mediation_filtername	Name of the filter applied to send a request towards mediation.
ocscp_mediation_triggerpoint	Trigger point used to send requests toward mediation.
ocscp_nexthop_scp_fqdn	FQDN of the selected SCP for interscp requests.
ocscp_nf_end_point	- The endpoint details of producer NF, SEPP, or custom roaming proxy for interplmn scenarios. - The endpoint details of producer NF or SCP for interscp scenario. The endpoint can be an FQDN or IP address. The value of this dimension can be "fqdn:port" if SCP routes the request using FQDN or "IP:port" if SCP routes the request using IP. - If the profile does not have an IP address, the value is "fqdn:port". - If the profile has both IP addresses and FQDN, the value is "IP:port" as SCP provides preference to IP address if the egress_host_preference parameter is disabled. - If the egress_host_preference parameter is enabled, SCP can use either an IP address or FQDN based on the configuration. - If the egress_host_preference parameter is enabled and if FQDN is configured for routing, SCP uses resolved "IP:port" if the fqdnResolution is nfProfile or "FQDN:port" if the fqdnResolution is DNS.
ocscp_nf_instance_id	Producer NF instance ID for health check metrics.
ocscp_nf_setid	The NF setid of selected producer NF. If nfsetid is present in the discovery headers or routing binding headers, retrieve it from there; otherwise, it should be extracted from the nfprofile of producer.
ocscp_nrf_service_type	Service name of the NRF NF in delegated discovery metrics.
ocscp_peer_scp_fqdn	The FQDN of peer SCP.
ocscp_peer_scp_instance_id	The NF instance Id of peer SCP.
ocscp_primary_producer_fqdn	The FQDN of the selected primary producer NF, in the case of alternate routing.
ocscp_processing_time	The bucket list of SCP requests or response processing times.
ocscp_producer_host	The FQDN of selected producer NF.
ocscp_producer_nf_fqdn	The FQDN of producer NF for InterSCP Metrics.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
ocscp_producer_nf_instance_id	- The NF Instance ID of producer NF, SEPP, or custom roaming proxy for interplmn scenarios. - The NF Instance ID of producer NF or SCP for interscp scenarios.
ocscp_producer_nf_type	The NF Type of producer NF selected by SCP. (For example, UDM, PCF, and so on.)
ocscp_producer_service_instance_id	- The service instance ID of producer NF, SEPP, or custom roaming proxy for interplmn scenarios. - The service instance ID of producer NF or SCP for interscp scenarios. Possible Values: Service instance ID format as defined in the specification. "NA" if service instance ID is unavailable.
ocscp_res_msg_size	Message size of the response sent by SCP to the consumer. Message size buckets. for example, 1 (size < 1k bytes), 2 (1k < size < 2k bytes), 4 (2k < size < 4k), etc.
ocscp_response_code	HTTP response status code. The possible values are: HTTP status code 100 through 599, or NA when unavailable.
ocscp_response_code_class	Grouped HTTP response status class. The possible values are: 1xx, 2xx, 3xx, 4xx, 5xx, 2, 3, 4, and 5.
ocscp_scope	Scope NF Load received is applicable to nfInstance or serviceInstance.
ocscp_scp_end_point	Producer SCP endpoint details for interSCP metrics. Endpoint details can contain a FQDN or IP address.
ocscp_scp_instance_id	Producer SCP instance ID for interSCP metrics.
ocscp_sepp_end_point	Selected SEPP endpoint details for InterPLMN metrics. Endpoint details can contain a FQDN or IP address.
ocscp_sepp_fqdn	Selected SEPP FQDN details for InterPLMN metrics.
ocscp_sepp_instance_id	Selected SEPP instance ID for InterPLMN metrics.
ocscp_server_header	Server header received in case of failure received from side car.
ocscp_threshold_level	The CPU threshold level.
ocscp_upstream_service_time	The time taken to receive a response from producer NF.
peer_info	The NF instance ID of the peer for which the load is reported.
pod_name	The pod name for which metric is pegged.
PrimaryEndPoint	Primary end point selected by SCP for routing before alternate routing.
processingTimeInMs	Total time taken for notification processing in milliseconds.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
queueCapacity	Notification Metrics: Maximum Notification queue size (runQueue:40, notificationQueue:5000, waitingQueue: 5000) Nrf Proxy Metrics: Maximum size is 10000. Load Manager Metrics: Maximum size is 10000. Cache Metrics: The maximum size of the queue is 30000 for scpCacheExecutorQueue and 10000 for others. Worker Metrics: Metrics: The maximum size is 10000.
queueName	Notification Queue Name (runQueue, notificationQueue, waitingQueue) NRF Proxy Metrics: Name of the nrf-proxy queue (scpDownstreamExecutorQueue, scpUpstreamExecutorQueue) Load Manager Metrics: Name of the queue (sutLciCohEvExecutorQueue, sutLciAppEvExecutorQueue, peerLciCohEvExecutorQueue, peerLciAppEvExecutorQueue, loadCohEvExecutorQueue, loadAppEvExecutorQueue) Cache Metrics: Name of the queue (scpCacheExecutorQueue, accessTokenAppEvExecutorQueue, accessTokenCohEvExecutorQueue) Worker Metrics: Name of the queue (scpDownstreamExecutorQueue, scpUpstreamExecutorQueue, scpNrfProxyDownstreamExecutorQueue, scpClientExecutorQueue, scpUpdateSSLCertsQueue, scpMediationDownstreamExecutorQueue, scpReconfigureEgressRLExecutorQueue)
reqType	The request type for the oauth tocket request (for example, ondemand or proactive).
requester_nfType	The requester NF Type received the request for oauth token.
requestType	The HTTP method of request received on configuration (for example, GET, PUT, or DELETE).
responseCode	The HTTP status code in the response from SCP.
responseCodeClass	The HTTP status code class in response to SCP (For example, the response code is 2xx for success responses, 5xx, 4xx, or 3xx for error responses.) The possible values are "OnDemand" and "Scheduled".
sbi_message_priority	The value of the sbi_message_prirotiy header in the request received.
scheme	The scheme received in the rx request or the scheme of the selected producer for the tx request.
scp_local_coh_cluster_name	The SCP local coherence cluster name.
scp_nf_instance_id	The NF instance ID of SCP.
scp_remote_coh_cluster_fqdn	The remote SCP coherence cluster FQDN.
scp_remote_coh_cluster_name	The remote SCP coherence cluster name.
scp_remote_coh_cluster_nf_instance_id	The remote SCP coherence cluster NF instance ID.
scp_remote_coh_cluster_port	The remote SCP coherence cluster port.
scp_service	The SCP microservice name for which metric is pegged.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
service_proto_name	The service proto-name used for DNS SRV resolution.
severity	The severity of the condition.
source	The Microservice from which the request was originated.
source (TLS)	Contains the source address details involved in HTTPS connection.
status	The health check status code.
status_code	The response status code.
subscriber_info_present	If any of the following discovery headers are present in the request: 3gpp-sbi-discovery-supi, 3gpp-sbi-discovery-gpsi, 3gpp-sbi-discovery-external-group-identity, 3gpp-sbi-discovery-routing-indicator, 3gpp-sbi-discovery-msisdn, or 3gpp-sbi-discovery-imsi.
subscriber_info_present_in_discovery_headers	If any of the following discovery headers are present in the request: 3gpp-sbi-discovery-supi, 3gpp-sbi-discovery-gpsi, 3gpp-sbi-discovery-external-group-identity, 3gpp-sbi-discovery-routing-indicator, 3gpp-sbi-discovery-msisdn, or 3gpp-sbi-discovery-ims.
successRspType	The success response code received for the health check.
tableName	The table name indicates which operation is performed. For example, SERVICE_ENTRIES.
target_nfType	The NF type in oauth access token request.
targetFqdn	The NF FQDN in an oauth access token request.
taskId	The NRF DNS SRV migration task ID.
taskName	The NRF DNS SRV migration task name.
taskState	The NRF DNS SRV migration task state.
timeInMs	The time taken in Notification queues.
title	The error reason for Health check failure.
triggerpoint	The mediation triggerpoint
tls_version	Indicates the TLS version used to establish the HTTPS connection. Note: In some failure cases, the TLS version will not be available and will be displayed as "NA".
refresh_status	Indicates whether the invalidated cache record at the scp-worker is successfully refreshed.
valid_NRF_response_to_fail	Whether SCP converts 200 OK (NRF) to 400 error due to an empty profile list.
validation_type	The validation type for CCA.
kafka_partition_id	Partition ID of the Kafka partition, which is selected for traffic feed messages. For the partition selection strategy "RoundRobin," partitions are not known to the SCP application, thus the partition ID is used as "NA".
kafka_broker_id	The broker ID of the Kafka partition leader is selected for the traffic feed message. For the partition selection strategy "RoundRobin," broker IDs are not known to the SCP application, thus the broker ID is used as "NA".
ocscp_object_pool_name	The name of the object pool in the case of multiple object pool implementations.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
ocscp_worker_client_name	The name of the async client for identification of pool objects paraphrase.
ocscp_object_trans_state	The transaction status of pool objects during the transaction timeout for pool objects.
clash_type	The cause of clash for pool objects.
ocscp_attempted_producers	This is a list of producer FQDNs or IPs attempted for a particular SBI message.
ocscp_timeout_point	Indicates the location where the metric was recorded.
ocscp_requester_nfType	Specifies the type of requester NF that was received in the request for the OAuth token.
ocscp_target_nfType	Specifies the target NF type in the OAuth access token request.
ocscp_validation_failure	Indicates the type of validation failure for the timestamp header.
ocscp_mediation_udv_name	This dimension indicates the name of the user-defined mediation variable.
ocscp_mediation_udv_max_usage_limit	The integer limit for the maximum per transaction usage of mediation user-defined variables.
ocscp_nf_type_nf_service_type	The concatenated value of nfType and nfService.
alternate_route_cause	This dimension indicates the cause of alternate routing when SCP initiates alternate routing, such as ErrorReceived, Timeout, or ConnectionError. Possible values: ErrorReceived, Timeout, ConnectionError, and Other. If this dimension is pegged as "Other" and you want to determine the exact cause among multiple possibilities, refer to the <code>ocscp_metric_5gsbi_upstream_destination_rejection_total</code> metric, where the <code>ocscp_cause</code> value indicates the reason for Reselection or AlternateRoute. Note: - The ConnectionError value also applies to producer NF reselection. "Other" appears as a value when SCP performs producer NF reselection after the previous producer selection failed due to: - exceeded egress rate limit configuration. - circuit breaking. - outlier detection. - failure in obtaining OAuth token for the previously selected producer NF. - producer NF published congestion. - unroutable NF state (as NF is marked as SUSPENDED). - unhealthy producer NF, unhealthy and outlier SCP.

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
producer_nf_info	This dimension provides information about the destination producer NF Type and the destination NF service name of the request message, separated by a hyphen. Format: <NF Type>-<NF Service Name>Example: UDM-nudn-uecm The value of the dimension follows the format <NF TYPE>-<NF SERVICE>, where NF TYPE is always in uppercase and NF SERVICE is in lowercase.
ocscp_peer_roaming_proxy_info	Provides information about the downstream peer roaming proxy in inter-PLMN scenarios. Includes proxy identification derived from the Via header, provided as either an NF instance ID or an FQDN, depending on the Via header format. Possible value: Downstream roaming proxy NF Instance Id or FQDN
ocscp_custom_roaming_proxy_nf_type	Indicates the NF type of the custom roaming proxy, either the ingress roaming proxy from which the request is received or the egress roaming proxy selected for routing. Possible value: Custom Roaming Proxy NF type
ocscp_custom_roaming_proxy_fqdn	Indicates the FQDN of the custom roaming proxy selected for routing. Possible value: FQDN of the custom roaming proxy
ocscp_custom_roaming_proxy_instance_id	Indicates the NF instance ID of the custom roaming proxy selected for routing. Possible value: NF Instance Id of the custom roaming proxy
ocscp_custom_roaming_proxy_end_point	Shows the endpoint information (IP address or FQDN) of the custom roaming proxy selected for routing. Possible value: IP or FQDN of custom roaming proxy
discovery_source	Indicates the NF discovery source from which the discovery result was obtained for egress roaming requests. Possible value: SCP
discovery_result	Indicates whether the NF discovery operation succeeded or failed for egress roaming requests. Possible value: • SUCCESS • FAIL
ocscp_max_via_header_processing_limit	Indicates the maximum number of Via header elements (from a single Via header or multiple Via headers) that SCP will process when handling Via headers for ingress requests. Possible value: Maximum number of Via header elements that SCP supports
ocscp_nfdiscovery_source	Indicates the source of NF discovery for Model C discovery and Model D delegated discovery. Possible values: • SCP • NRF • SCP_FOLLOWED_BY_NRF • NRF_FOLLOWED_BY_SCP

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
ocscp_capacity_priority_updated	Indicates the priority or capacity configuration chosen from the selected rule. This dimension is used for NF discovery when discovery is performed through NRF and the enhancement is applied. It is also used for consumer NF selection flows when the selection mode is ENHANCED_CONSUMER_NF_SELECTION and the enhancement is applied. Possible values: - ALL_NFS: The allNfPriorityCapacityInfo parameter is configured and applied based on locality. - ADDED_NFS: The addedNfPriorityCapacityInfo parameter is configured and applied based on locality. - NONE: Neither addedNfPriorityCapacityInfo nor allNfPriorityCapacityInfo is configured in the rule, therefore, it is not applied.
ocscp_nfselection_mode	Indicates the mode of NF selection method. Possible values: CONSUMER_NF_SELECTION and ENHANCED_CONSUMER_NF_SELECTION
ocscp_nfdiscovery_fallback	Indicates whether NF discovery falls back to an alternate discovery source. Possible values: true and false
ocscp_nfdiscovery_req_type	Indicates the type of request. Valid values include Model C discovery request, Model D delegated discovery request, and roaming proxy or next-hop discovery request. Possible values: MODEL_C_DISC_REQ, MODEL_D_DELEG_DISC_REQ, and NEXT_HOP_DISCOVERY
ocscp_service	Indicates the name of microservice. Possible values: scp-load-manager and scp-worker,etc.
ocscp_status	Indicates the status of health checks. Possible values: true and false
ocscp_sync_event	Specifies the event for which data synchronizes from SCP-Notification to SCP-Worker. Possible values: ROUTING_RULE_SYNC, NF_PROFILE_SYNC, and NF_PROFILE_CHANGE_SYNC.
ocscp_consumer_scp_info	Provides the details of the consumer SCP identifier. Possible values: Consumer SCP FQDN or nf-instance ID.
ocscp_roaming_proxy_selection_rule_name	Specifies the roaming proxy selection information rule that matched the request.
config_name	Indicates the name of the matched NF GroupId retrieval configuration rule during NF GroupId resolution.
discovery_complete	Indicates whether for NF GroupId retrieval request, UDR discovery processing was completed or not.
resolution_action	Indicates the action from the matched NF GroupId retrieval rule that indicates whether SCP should invoke GroupId resolution or skip it. Possible values: INVOKE_GROUPID_RESOLUTION SKIP_GROUPID_RESOLUTION

Table 5-2 (Cont.) SCP Dimension Descriptions

Dimension	Description
trafficfeed_instance_id	Indicates the unique identifier of the traffic feed (Kafka) client instance within a traffic feed set that was selected or used for the publish attempt. It allows you attribute attempted, success, failed, or not-attempted events to a specific traffic feed instance. Possible values: Valid UUDI format values.
setName	Identifier of the DD (Data Director) set the subscription request targets; used to segment metrics per DD set/region.
statusFamily	HTTP status classification for failed DD subscription responses; one of 404 (explicit Not Found), 4xx (other client errors), or 5xx (server errors).

Note

- The values for these dimensions, such as `ocscp_consumer_host`, `ocscp_consumer_nf_instance_id`, and `ocscp_consumer_nf_type` are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats.
- In the notification message type, certain dimension values such as `ocscp_nf_service_type`, `ocscp_nf_setid`, and `ocscp_nf_type` may not qualify for pegging. In the scenario where the service name cannot be derived from the PATH URI, pegging will not take place, and if these dimensions are identified through headers, pegging will occur.

5.2.1 Metrics

The following table provides information about metrics for SCP.

Caution

User, computer and applications, and character encoding settings may cause an issue when copy-pasting commands or any content from PDF. The PDF reader version also affects the copy-pasting functionality. It is recommended to verify the pasted content when the hyphens or any special characters are part of the copied content.

Note

- Note that Kubernetes-based dimensions, such as pod name or namespace, require updates based on the Prometheus deployment.
- All the metrics with HTTP in their names are pegged for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
- All the counter metrics of SCP can achieve a maximum value of 1.7976931348623157E308, that is, $1.7976931348623157 \times 10^{308}$. When the maximum value is achieved, it gets reset to 0. To achieve this maximum value, it requires unlimited time.

Table 5-3 ocscp_metric_http_rx_req_total

Field	Details
Description	The total number of incoming HTTP requests at the SCP-Worker service. The ocscp_nf_service_type dimension for notification is "n<nfType>-unknown or NA-unknown". This metric continues to include the ocscp_authority dimension even when scpAuthorityMetricLabelDisabled is set to true. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	Non OCI Dimensions • ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) • ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) • ocscp_req_msg_size (The request message size buckets. e.g., 1 (size < 1k bytes), 2 (1k < size < 2k bytes), 4 (2k < size < 4k), etc.) • ocscp_fqdn(contains fqdn of scp) • plmn_id(mnc115-mcc327,mnc789-mcc123) • ocscp_authority • ocscp_message_type • ocscp_consumer_host • ocscp_consumer_nf_instance_id • ocscp_consumer_nf_type • ocscp_consumer_nf_unique_id • These dimensions are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats. • The ocscp_consumer_host dimension for the metric can have an "OCSCP-INITIATED-MSG" value if the request is an SCP self-generated request. OCI Dimensions • NFSERVICETYPE • REQUESTMSGSIZE • PLMNID • SCPAUTHORITY • MSGTYPE • consumerInfo • CONSUMERUNIQUEID

Table 5-3 (Cont.) ocscp_metric_http_rx_req_total

Field	Details
Example	- ocscp_metric_http_rx_req_total{ocscp_nf_type="UDM"} - ocscp_metric_http_rx_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_http_rx_req_total{ocscp_req_msg_size="2"} - ocscp_metric_http_rx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_http_rx_req_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"} - ocscp_message_type="SERVICE_SPECIFIC_REQUEST"} - ocscp_metric_http_rx_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"} - ocscp_metric_http_rx_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_metric_http_rx_req_total{ocscp_consumer_nf_type="SMF"} - ocscp_metric_http_rx_req_total{ocscp_consumer_nf_unique_id="SE1SMSF1"} - ocscp_metric_http_rx_req_total{plmn_id="mnc115-mcc327,mnc789-mcc123"} - ocscp_metric_http_rx_req_total{ocscp_message_type="NOTIFICATION_OR_CALLBACK_REQUEST", ocscp_nf_type="NA", ocscp_nf_service_type="NA-unknown"}

Table 5-4 ocscp_metric_http_tx_req_total

Field	Details
Description	The total number of HTTP requests forwarded by SCP to the upstream cluster. Each SCP-worker pod will peg this metric. The ocscp_nf_service_type dimension for notification is "n<nfType>-unknown or NA-unknown". Note: The ocscp_authority dimension will get pegged only when it is enabled using the value.yaml file. scpAuthorityMetricLabelDisabled: false Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter

Table 5-4 (Cont.) ocscp_metric_http_tx_req_total

Field	Details
Dimension	Non OCI Dimensions - ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_nf_end_point (Default value = NA) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - plmn_id(mnc123-mcc254) - ocscp_fqdn(contains fqdn of scp) - ocscp_authority - ocscp_message_type - These dimensions are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats. - The ocscp_consumer_host dimension for the metric can have an "OCSCP-INITIATED-MSG" value if the request is an SCP self-generated request. OCI Dimensions - NFSERVICETYPE - producerHost - Nfid - NFSETID - PLMNID - SCPAUTHORITY - MSGTYPE - consumerInfo - CONSUMERUNIQUEID
Example	- ocscp_metric_http_tx_req_total{ocscp_nf_type="UDM"} - ocscp_metric_http_tx_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_http_tx_req_total{ocscp_nf_end_point="10.96.166.65:80"} - ocscp_metric_http_tx_req_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_http_tx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_http_tx_req_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"} - ocscp_metric_http_rx_req_total{ocscp_message_type="NOTIFICATION_OR_CALLBACK_REQUEST"}

Table 5-5 ocscp_metric_http_rx_res_total

Field	Details
Description	Total number of HTTP responses received by SCP with specific HTTP response codes (for example, 201, 503, and so on). Each SCP-Worker pod will peg this metric. The ocscp_nf_service_type dimension for notification is "n<nfType>-unknown or NA-unknown". Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter

Table 5-5 (Cont.) ocscp_metric_http_rx_res_total

Field	Details
Dimension	Non OCI Dimensions • ocscp_response_code (e.g., 201, 503, 404, etc.) • ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) • ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) • ocscp_nf_end_point (Default value = NA) • ocscp_res_msg_size (The response message size buckets. e.g., 1 (size < 1k bytes), 2 (1k < size < 2k bytes), 4 (2k < size < 4k), etc.) • ocscp_response_code_class (e.g., 2, 5, etc.) • ocscp_producer_host (default value = NA, Contains fqdn of producer) • plmn_id(mnc123-mcc254) • ocscp_fqdn(contains fqdn of scp) • ocscp_authority • routing_options_config Note: These dimensions are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats. OCI Dimensions • NFSERVICETYPE • producerHost • Nfid • RESPONSECODE • RESPONSEMSGSIZE • NFSETID • PLMNID • SCPAUTHORITY
Example	• ocscp_metric_http_rx_res_total{ocscp_response_code="201"} • ocscp_metric_http_rx_res_total{ocscp_nf_type="UDM"} • ocscp_metric_http_rx_res_total{ocscp_nf_service_type="nudm-uecm"} • ocscp_metric_http_rx_res_total{ocscp_nf_end_point="10.96.166.65:80"} • ocscp_metric_http_rx_res_total{ocscp_res_msg_size="2"} • ocscp_metric_http_rx_res_total{ocscp_response_code_class="2"} • ocscp_metric_http_rx_res_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} • ocscp_metric_http_rx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} • ocscp_metric_http_rx_res_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"} • ocscp_metric_http_rx_res_total{routing_options_config="configsetname1"}

Table 5-6 ocscp_metric_http_tx_res_total

Field	Details
Description	Total number of HTTP responses forwarded by SCP back to the consumer or request originator with specific HTTP response codes (For example, 201, 503, and so on) Each SCP-worker pod will peg this metric when sending the response back to the consumer. The ocscp_nf_service_type dimension for notification is "n<nfType>-unknown or NA-unknown". Note: The ocscp_authority dimension will get pegged only when it is enabled using the value.yaml file. scpAuthorityMetricLabelDisabled: false Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	Non OCI Dimensions - ocscp_response_code (for example, 201, 503, 404, and so on.) - ocscp_nf_type (for example, UDM, PCF, AMF, and so on.) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_locality (SCP site name for example, Loc6, Loc7, and so on.) - ocscp_response_code_class (for example, 2, 5, and so on.) - ocscp_fqdn(contains fqdn of scp) - ocscp_authority - plmn_id(mnc123-mcc254) - ocscp_consumer_host - ocscp_consumer_nf_instance_id - ocscp_consumer_nf_type - ocscp_consumer_nf_unique_id Note: The ocscp_consumer_host dimension for the metric can have an "OCSCP-INITIATED-MSG" value if the request is an SCP self-generated request. OCI Dimensions - NFSERVICETYPE - RESPONSECODE - PLMNID - SCPAUTHORITY - consumerInfo - CONSUMERUNIQUEID
Example	- ocscp_metric_http_tx_res_total{ocspf_response_code="201"} - ocscp_metric_http_tx_res_total{ocspf_nf_type="UDM"} - ocscp_metric_http_tx_res_total{ocspf_nf_service_type="nudm-uecm"} - ocscp_metric_http_tx_res_total{ocscp_locality="Loc7"} - ocscp_metric_http_tx_res_total{ocscp_response_code_class="2"} - ocscp_metric_http_tx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_http_tx_res_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"} - ocscp_metric_http_tx_res_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"} - ocscp_metric_http_tx_res_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_metric_http_tx_res_total{ocscp_consumer_nf_type="SMF"} - ocscp_metric_http_tx_res_total{ocscp_consumer_nf_unique_id="SE1SMSF1"}

Table 5-7 ocscp_metric_attempts_to_forward_route_total

Field	Details
Description	Total number of requests that matched the catch-all-route routing rule.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on.) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_nf_end_point (Default value = 0.0:00) - ocscp_locality (SCP site name for example, Loc6, Loc7, and so on.) - ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA) - ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA) - ocscp_fqdn(contains fqdn of scp)
Example	- ocscp_metric_attempts_to_forward_route_total{ocscp_nf_type="UDM"} - ocscp_metric_attempts_to_forward_route_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_attempts_to_forward_route_total{ocscp_nf_end_point="10.96.166.65:80"} - ocscp_metric_attempts_to_forward_route_total{ocscp_locality="Loc7"} - ocscp_metric_attempts_to_forward_route_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_attempts_to_forward_route_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} - ocscp_metric_attempts_to_forward_route_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-8 ocscp_metric_routing_attempt_fail_total

Field	Details
Description	Total number of request that SCP failed to route due to any reason.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_nf_end_point (Default value = 0.0:00) - ocscp_error_group - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_fqdn(contains fqdn of scp)
Example	- ocscp_metric_routing_attempt_fail_total{ocscp_nf_type="UDM"} - ocscp_metric_routing_attempt_fail_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_routing_attempt_fail_total{ocscp_nf_end_point="10.96.166.65:80"} - ocscp_metric_routing_attempt_fail_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_routing_attempt_fail_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_routing_attempt_fail_total{ocscp_error_group="ocscp.http.routing_failure.connect_failure"}

Table 5-9 ocscp_metric_request_processing_time_total

Field	Details
Description	This metric captures the processing time by SCP for ingress requests into the time buckets, for example, 1ms, 2ms, 4ms, 8ms and so on.
Type	Histogram
Dimension	- ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_processing_time (for example, 1ms, 2ms, 4ms, 8ms, 16ms, 32ms, 64ms, 128ms, 256ms, 500ms, 1000ms, 2000ms, 3000ms, 5000ms, 10000ms, 15000ms, >15000ms) - ocscp_fqdn (contains fqdn of scp)
Example	- ocscp_metric_request_processing_time_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_request_processing_time_total{ocscp_processing_time="1ms"} - ocscp_metric_request_processing_time_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-10 ocscp_metric_response_processing_time_total

Field	Details
Description	This metric captures the processing time by SCP for ingress responses into the time buckets (for example, 1ms, 2ms, 4ms, 8ms and so on).
Type	Histogram
Dimension	- ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_processing_time (for example, 1ms, 2ms, 4ms, 8ms, 16ms, 32ms, 64ms, 128ms, 256ms, 500ms, 1000ms, 2000ms, 3000ms, 5000ms, 10000ms, 15000ms, >15000ms.) - ocscp_fqdn (contains fqdn of scp)
Example	- ocscp_metric_response_processing_time_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_response_processing_time_total{ocscp_processing_time="1ms"} - ocscp_metric_response_processing_time_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-11 ocscp_metric_request_per_try_timeout_total

Field	Details
Description	This metric captures the number of incoming request whose per try timeout expired.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on.) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_nf_end_point (Default value = NA) - ocscp_locality (SCP site name for example, Loc6, Loc7, etc.) - ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA) - ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_nf_setid(e.g, set1.udmset.5gc.mnc012.mcc345, default value = "UNKNOWN") - ocscp_fqdn (contains fqdn of scp)

Table 5-11 (Cont.) ocscp_metric_request_per_try_timeout_total

Field	Details
Example	- ocscp_metric_request_per_try_timeout_total{ocscp_nf_type="UDM"} - ocscp_metric_request_per_try_timeout_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_request_per_try_timeout_total{ocscp_nf_end_point="10.96.166.65:80"} - ocscp_metric_request_per_try_timeout_total{ocscp_locality="Loc7"} - ocscp_metric_request_per_try_timeout_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_request_per_try_timeout_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} - ocscp_metric_request_per_try_timeout_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_request_per_try_timeout_total{ocscp_nf_setid="set1.udmset.5gc.mnc012.mcc345"} - ocscp_metric_request_per_try_timeout_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-12 ocscp_metric_transaction_timeout_total

Field	Details
Description	This metric captures the total number of request whose transaction timed out.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on.) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_nf_end_point (Default value = NA) - ocscp_locality (SCP site name for example, Loc6, Loc7, and so on.) - ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, and so on. Default value = NA) - ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, and so on. Default value = NA) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_fqdn (contains fqdn of scp)
Example	- ocscp_metric_transaction_timeout_total{ocscp_nf_type="UDM"} - ocscp_metric_transaction_timeout_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_transaction_timeout_total{ocscp_nf_end_point="10.96.166.65:80"} - ocscp_metric_transaction_timeout_total{ocscp_locality="Loc7"} - ocscp_metric_transaction_timeout_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_transaction_timeout_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} - ocscp_metric_transaction_timeout_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_transaction_timeout_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-13 ocscp_metric_max_routing_attempts_exhausted_total

Field	Details
Description	This metric captures the total number of requests whose maximum routing attempts expired during alternate routing.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on.) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_locality (SCP site name for example, Loc6, Loc7, and so on.) - ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, and so on. Default value = NA) - ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA) - ocscp_fqdn (contains fqdn of scp)
Example	- ocscp_metric_max_routing_attempts_exhausted_total{ocscp_nf_type="UDM"} - ocscp_metric_max_routing_attempts_exhausted_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_max_routing_attempts_exhausted_total{ocscp_locality="Loc7"} - ocscp_metric_max_routing_attempts_exhausted_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_max_routing_attempts_exhausted_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} - ocscp_metric_max_routing_attempts_exhausted_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-14 ocscp_notifications_rejected_topologysource_local_total

Field	Details
Description	Number of NF notification messages rejected because "learning from NRF" was configured as "not allowed". Metrics Pegging Condition: This metrics will be pegged whenever notification is received for NF configured as LOCAL.
Type	Counter
Dimension	- nfType (for example: UDM, AMF) - ocscp_fqdn
Example	- scp_local_topology_source_total{nfType = "UDM"} - scp_local_topology_source_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-15 ocscp_topologysource_toggle_nrf_to_local_total

Field	Details
Description	Number of times topology source changed from "NRF" to "Local" for given NF.
Type	Counter
Dimension	- nfType (for example: UDM, AMF) - ocscp_fqdn

Table 5-15 (Cont.) ocscp_topologysource_toggle_nrf_to_local_total

Field	Details
Example	• <code>scp_topologysource_toggle_nrf_to_local_total{nfType = "UDM"}</code> • <code>scp_topologysource_toggle_nrf_to_local_total{scpFqdn = "ocscp-scp-worker.scpsvc.svc.cluster.local"}</code>

Table 5-16 ocscp_topologysource_toggle_local_to_nrf_total

Field	Details
Description	Number of times topology source changed from "Local" to "NRF" for given NF.
Type	Counter
Dimension	• <code>nfType</code> (for example: UDM, AMF) • <code>ocscp_fqdn</code>
Example	• <code>scp_topologysource_toggle_local_to_nrf_total{nfType = "UDM"}</code> • <code>scp_topologysource_toggle_local_to_nrf_total{scpFqdn = "ocscp-scp-worker.scpsvc.svc.cluster.local"}</code>

Table 5-17 ocscp_db_operation_failure_total

Field	Details
Description	Number of times audit failed due to database failure.
Type	Counter
Dimension	• <code>ocscp_fqdn</code> • <code>dbOperation</code> (eg: find, findAll, save, saveAll, get, count, delete, deleteAll) • <code>tableName</code> (eg: VIRTUAL_SERVICES, SERVICES_ENTRIES, NF_PROFILES.)
Example	• <code>ocscp_db_operation_failure_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</code> • <code>ocscp_db_operation_failure_total{dbOperation="findAll"}</code> • <code>ocscp_db_operation_failure_total{tableName="SERVICE_ENTRIES"}</code>

Table 5-18 ocscp_notification_nf_profile_processing_failure_total

Field	Details
Description	Number of times notification process failure.
Type	Counter
Dimension	• <code>nfType</code> (eg., AMF) • <code>nfInstanceId</code> • <code>ocscp_fqdn</code> • <code>topologySource</code> • <code>cause</code>

Table 5-18 (Cont.) ocscp_notification_nf_profile_processing_failure_total

Field	Details
Example	- ocscp_notification_nf_profile_processing_failure_total{nfType="UDM",nfinstanceid="6faf3abc-6e4a-4454-a507-a14ef8e1bc4b",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_notification_nf_profile_processing_failure_total{nfType="UDM",nfinstanceid="6faf3abc-6e4a-4454-a507-a14ef8e1bc4b",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",topologySource="NRF"} - ocscp_notification_nf_profile_processing_failure_total{cause="NDB_REDO_LOG_OVERLOADED",nfInstanceid="11110918-e9ce-0205-aada-100000000276",nfType="AUSF",ocscp_fqdn="ocscp-scp-worker.ocscp-skyfire-ns-2.svc.skyfire.lab.us.oracle.com",topologySource="NRF"}

Table 5-19 ocscp_patch_subscription_nf_success_total

Field	Details
Description	Number of successful patch operation of subscription based on nfType and nrfRegionOrSetId.
Type	Counter
Dimension	- nfType (eg: UDM, AMF) - nrfRegionOrSetId (eg:Reg1,Reg2) - ocscp_fqdn
Example	- ocscp_patch_subscription_nf_success_total{nfType="AUSF"} - ocscp_patch_subscription_nf_success_total{nrfRegionOrSetId="Reg1"} - ocscp_patch_subscription_nf_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-20 ocscp_patch_subscription_nf_failure_total

Field	Details
Description	Number of failure patch operation of subscription based on nfType and nrfRegionOrSetId.
Type	Counter
Dimension	- nfType (eg: UDM, AMF) - nrfRegionOrSetId (eg:Reg1,Reg2) - ocscp_fqdn
Example	- ocscp_patch_subscription_nf_failure_total{nfType="AUSF"} - ocscp_patch_subscription_nf_failure_total{nrfRegionOrSetId="Reg1"} - ocscp_patch_subscription_nf_failure_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-21 ocscp_unsubscription_nf_success_total

Field	Details
Description	Number of successful operations of unsubscription based on nfType and nrfRegionOrSetId.
Type	Counter
Dimension	• nfType (for example: UDM, AMF) • nrfRegionOrSetId(eg:Reg1,Reg2) • ocscp_fqdn
Example	• ocscp_unsubscription_nf_success_total{nfType="AUSF"} • ocscp_unsubscription_nf_success_total{nrfRegionOrSetId="Reg1"} • ocscp_unsubscription_nf_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-22 ocscp_unsubscription_nf_failure_total

Field	Details
Description	Number of failure operations of unsubscription based on nfType and nrfRegionOrSetId.
Type	Counter
Dimension	• nfType (for example: UDM, AMF) • nrfRegionOrSetId(eg:Reg1,Reg2) • ocscp_fqdn
Example	• ocscp_unsubscription_nf_failure_total{nfType="AUSF"} • ocscp_unsubscription_nf_failure_total{nrfRegionOrSetId="Reg1"} • ocscp_unsubscription_nf_failure_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-23 ocscp_subscription_nf_success_total

Field	Details
Description	Number of successful operations of subscription based on nfType and nrfRegionOrSetId.
Type	Counter
Dimension	• nfType (for example: UDM, AMF) • nrfRegionOrSetId(eg:Reg1,Reg2) • ocscp_fqdn
Example	• ocscp_subscription_nf_success_total{nfType="AUSF"} • ocscp_subscription_nf_success_total{nrfRegionOrSetId="Reg1"} • ocscp_subscription_nf_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-24 ocscp_subscription_nf_failure_total

Field	Details
Description	Number of failure operations of subscription based on nfType and nrfRegionOrSetId.
Type	Counter
Dimension	• nfType (for example: UDM, AMF) • nrfRegionOrSetId (eg: Reg1, set1.nrfset.5gc.mnc014.mcc310) • ocscp_fqdn
Example	• ocscp_subscription_nf_failure_total{nfType="AUSF"} • ocscp_subscription_nf_failure_total{nrfRegionOrSetId="Reg1"} • ocscp_subscription_nf_failure_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-25 ocscp_audit_2xx_empty_nf_array

Field	Details
Description	The state of metrics is 1 when SCP audit receives empty NF array response for nfType. Then, state of metrics is changes to 0 when audit receives non empty NF array.
Type	Gauge
Dimension	• nftype • nrfregionorsetid • auditmethod
Example	ocscp_audit_2xx_empty_nf_array{nftype="UDM",nrfregionorsetid="nrf-set-1",auditmethod="nnrf-disc"}

Table 5-26 ocscp_audit_error_response

Field	Details
Description	The state of metrics is 1 when SCP audit receives error response for nfType. Then, state of metrics is changed to 0 when audit receives non error response for nfType.
Type	Gauge
Dimension	• nftype • nrfregionorsetid • auditmethod
Example	ocscp_audit_error_response{nftype="UDM",nrfregionorsetid="nrf-set-1",auditmethod="nnrf-disc"}

Table 5-27 ocscp_subscription_nrf_registration_success_total

Field	Details
Description	This metrics pegs the number of times registration successful for a particular nrfRegionOrSetId.
Type	Counter

Table 5-27 (Cont.) ocscp_subscription_nrf_registration_success_total

Field	Details
Dimension	nrfRegionOrSetId For example: (Reg11,Reg1,set1.nrfset.5gc.mnc014.mcc310) ocscp_fqdn
Example	- ocscp_subscription_nrf_registration_success_total{nrfRegionOrSetId="Reg11"} - ocscp_subscription_nrf_registration_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-28 ocscp_subscription_nrf_registration_failure_total

Field	Details
Description	This metrics pegs the number of times registration failed for a particular nrfRegionOrSetId.
Type	Counter
Dimension	nrfRegionOrSetId For example: (Reg11,Reg1,set1.nrfset.5gc.mnc014.mcc310) ocscp_fqdn
Example	- ocscp_subscription_nrf_registration_failure_total{nrfRegionOrSetId="Reg11"} - ocscp_subscription_nrf_registration_failure_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-29 ocscp_subscription_nrf_heartbeat_success_total

Field	Details
Description	This metrics pegs the number of times heartbeat successful for a particular nrfRegionOrSetId.
Type	Counter
Dimension	nrfRegionOrSetId For example: (Reg11,Reg1,set1.nrfset.5gc.mnc014.mcc310) ocscp_fqdn
Example	- ocscp_subscription_nrf_heartbeat_success_total{nrfRegionOrSetId="Reg11"} - ocscp_subscription_nrf_heartbeat_success_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-30 ocscp_subscription_nrf_heartbeat_failures_total

Field	Details
Description	This metrics pegs the number of times heartbeat failed for a particular nrfRegionOrSetId.
Type	Counter
Dimension	nrfRegionOrSetId For example: (Reg11,Reg1,set1.nrfset.5gc.mnc014.mcc310) ocscp_fqdn

Table 5-30 (Cont.) ocscp_subscription_nrf_heartbeat_failures_total

Field	Details
Example	- ocscp_subscription_nrf_heartbeat_failures_total{nrfRegionOrSetId="Reg11"} - ocscp_subscription_nrf_heartbeat_failures_total{scpFqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-31 ocscp_metric_upstream_service_time_total

Field	Details
Description	This metric captures the time taken by upstream host is responding the request in time buckets, for example, 1ms, 2ms, 4ms, 8ms, and so on.
Type	Histogram
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_nf_end_point (Default value = NA) - ocscp_authority ("ocscp-scp-worker.scpsvc.svc.cluster.local:8000") - ocscp_upstream_service_time (e.g., e.g., 1ms, 2ms, 4ms, 8ms, 16ms, 32ms, 64ms, 128ms, 256ms, 500ms, 1000ms, 2000ms, 3000ms, 5000ms, 10000ms, 15000ms, 20000ms, 30000ms, 40000ms, 50000ms, >50000ms) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_fqdn
Example	- ocscp_metric_upstream_service_time_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_upstream_service_time_total{ocscp_nf_end_point="10.96.166.65:80"} - ocscp_metric_upstream_service_time_total{ocscp_upstream_service_time="1ms"} - ocscp_metric_upstream_service_time_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_upstream_service_time_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_upstream_service_time_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}

Table 5-32 ocscp_metric_scp_generated_response_total

Field	Details
Description	Captures the error response generated by SCP.
Type	Counter

Table 5-32 (Cont.) ocscp_metric_scp_generated_response_total

Field	Details
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_nf_end_point - ocscp_producer_nf_instance_id - ocscp_producer_service_instance_id - ocscp_producer_host - ocscp_locality - ocscp_response_code - ocscp_error_group ocscp_authority when enabled or available
Example	ocscp_metric_scp_generated_response_total{ocscp_nf_type="UDM", ocscp_nf_service_type="n5g-eir-eic", ocscp_nf_end_point="10.0.1.15:8080", ocscp_producer_nf_instance_id="producer-inst-001", ocscp_producer_service_instance_id="svc-inst-001", ocscp_producer_host="udm01.example.com", ocscp_locality="local", ocscp_response_code="503", ocscp_error_group="ocscp.http.routing_failure.connect_failure", ocscp_authority="scp-worker.scpsvc.svc.cluster.local"}

Table 5-33 ocscp_notification_failure_type_total

Field	Details
Description	Number of Notification failed to process.
Type	Counter
Dimension	- errorType (for example: Invalid Supi Range, Invalid Identity Range, Notification Failure) - ocscp_fqdn
Example	- ocscp_notification_failure_type_total{errorType="Invalid Identity Range"} Note: errorType like Invalid Supi Range, Invalid Identity Range, Notification Failure - ocscp_notification_failure_type_total{ocscp_fqdn="ocscpworker.scpsvc.svc.cluster.local"}

Table 5-34 ocscp_nrf_notifications_requests_nf_total

Field	Details
Description	Indicates the number of NF profile notification requests from NRF specific to NFs per NF Type or NF profiles configured statically when TSI is set to LOCAL.
Type	Counter
Dimension	- nftype (for example: UDM and AMF) - ocscp_fqdn
Example	- ocscp_nrf_notifications_requests_nf_total{nftype="UDM"} - ocscp_nrf_notifications_requests_nf_total{ocscp_fqdn="ocscpworker.scpsvc.svc.cluster.local"}

Table 5-35 ocscp_notification_nf_profile_processing_success_total

Field	Details
Description	Indicates the number of processed notifications that include the notifications from NRF, AUDIT, and Reconfiguration.
Type	Counter
Dimension	- nftype (for example: UDM, AMF) - ocscp_fqdn
Example	- ocscp_notification_nf_profile_processing_success_total{nftype="UDM"} - ocscp_notification_nf_profile_processing_success_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-36 ocscp_config_tsi_change_ondemand_audit_invoke_success_total

Field	Details
Description	Number of successful On-Demand Audit invocations when TSI is changed.
Type	Counter
Dimension	nrfRegionOrSetId For example: (Reg11,Reg1,Reg2) ocscp_fqdn
Example	- ocscp_config_tsi_change_ondemand_audit_invoke_success_total{nrfRegionOrSetId="Reg11"} - ocscp_config_tsi_change_ondemand_audit_invoke_success_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-37 ocscp_config_tsi_change_ondemand_audit_invoke_failure_total

Field	Details
Description	Number of failed On-Demand Audit invocations when TSI is changed.
Type	Counter
Dimension	nrfRegionOrSetId For example: (Reg11,Reg1,Reg2) ocscp_fqdn
Example	- ocscp_config_tsi_change_ondemand_audit_invoke_failure_total{nrfRegionOrSetId="Reg11"} - ocscp_config_tsi_change_ondemand_audit_invoke_failure_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-38 ocscp_notification_profile_ignored_total

Field	Details
Description	Number of profiles ignored by notification.
Type	Counter

Table 5-38 (Cont.) ocscp_notification_profile_ignored_total

Field	Details
Dimension	- notificationSource (for example, NRF, AUDIT) - cause (for example, Duplicate Profile, Older Timestamp)
Example	- ocscp_notification_profile_ignored_total{notificationSource="NRF", cause="Duplicate Profile"} - ocscp_notification_profile_ignored_total{notificationSource="AUDIT", cause="Older Timestamp"}

Table 5-39 ocscp_notification_foreign_nf_locality_absent

Field	Details
Description	Sets to 1 if a foreign NF is registered from an unknown locality that is locality is not present in the foreign NF
Type	Gauge
Dimension	locality (for example: UNKNOWN_LOCALITY) nfInstanceId (for example: 1faf1bbc-6e4a-4454-a507-a14ef8e1bb6a) nftype (for example: UDM, AMF) nrfregionorsetid (for example: Reg1,Reg2) ocscp_fqdn
Example	- ocscp_notification_foreign_nf_locality_absent{locality="UNKNOWN_LOCALITY"} - ocscp_notification_foreign_nf_locality_absent{nfInstanceId="4947a69a-f61b-4bc1-b9da-47c9c5d14b64"} - ocscp_notification_foreign_nf_locality_absent{nftype="UDM"} - ocscp_notification_foreign_nf_locality_absent{nrfregionorsetid="Reg2"} - ocscp_notification_foreign_nf_locality_absent{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-40 ocscp_notification_foreign_nf_locality_unserved

Field	Details
Description	Sets to 1 if a foreign NF is registered and its locality is not served by any SCP
Type	Gauge
Dimension	locality (for example: Loc80) nfInstanceId (for example: 1faf1bbc-6e4a-4454-a507-a14ef8e1bb6a) nftype (for example: UDM, AMF) nrfregionorsetid (for example: Reg1, Reg2) ocscp_fqdn

Table 5-40 (Cont.) ocscp_notification_foreign_nf_locality_unserved

Field	Details
Example	- ocscp_notification_foreign_nf_locality_unserved{locality="Loc80"} - ocscp_notification_foreign_nf_locality_unserved{nflInstanceId="4947a69a-f61b-4bc1-b9da-47c9c5d14b64"} - ocscp_notification_foreign_nf_locality_unserved{nftype="UDM"} - ocscp_notification_foreign_nf_locality_unserved{nrfregionorsetid="Reg2"} - ocscp_notification_foreign_nf_locality_unserved{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-41 ocscp_notification_duplicate_foreign_location

Field	Details
Description	Sets to 1 if the locality of foreign SCP mate localities is the same as the one of localities present in the local SCP.
Type	Gauge
Dimension	locality (for example: Loc83) nflInstanceId (for example: 1faf1bbc-6e4a-4454-a507-a14ef8e1bb6a) nftype (for example: UDM, AMF) nrfregionorsetid (for example: Reg1, Reg2) ocscp_fqdn
Example	- ocscp_notification_duplicate_foreign_location{locality="Loc83"} - ocscp_notification_duplicate_foreign_location{nflInstanceId="4947a69a-f61b-4bc1-b9da-47c9c5d14b64"} - ocscp_notification_duplicate_foreign_location{nftype="SCP"} - ocscp_notification_duplicate_foreign_location{nrfregionorsetid="Reg2"} - ocscp_notification_duplicate_foreign_location{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-42 ocscp_interscp_downstream_rq_total

Field	Details
Description	Keeps track of ingress message received from another SCP
Type	Counter
Dimension	- ocscp_fqdn (for example: site2-ocscp-scp-worker.scpsvc.svc.cluster.local) - ocscp_nf_service_type (for example:"nudm-uecm") - ocscp_nf_type (for example:"UDM") - ocscp_fqdn - ocscp_peer_scp_fqdn (for example, "scp100svc.scpsvc.svc.cluster.local")

Table 5-42 (Cont.) ocscp_interscp_downstream_rq_total

Field	Details
Example	- ocscp_interscp_downstream_rq_total{ocscp_fqdn="site2-ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_interscp_downstream_rq_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000",ocscp_peer_scp_fqdn="scp100svc.scpsvc.svc.cluster.local"}

Table 5-43 ocscp_metric_rule_engine_processing_time_total

Field	Details
Description	Captures the processing time by SCP for rule engine
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, etc.) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, etc.) - ocscp_locality (SCP site name for example, Loc6, Loc7, etc.) - ocscp_processing_time (for example, 1ms, 2ms, 4ms, 8ms, etc) - ocscp_fqdn (contains fqdn of scp)
Example	ocscp_metric_rule_engine_processing_time_total{ocscp_locality="Loc7"} ocscp_metric_rule_engine_processing_time_total{ocscp_nf_service_type=" nudm-uecm"} ocscp_metric_rule_engine_processing_time_total{ ocscp_nf_type="UDM"} ocscp_metric_rule_engine_processing_time_total{ocscp_processing_time="29"}

Table 5-44 ocscp_metric_upstream_response_timeout_total

Field	Details
Description	Contains information of timeout for every attempt made by producer to get a response.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, etc.) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, etc.) - ocscp_locality (SCP site name for example, Loc6, Loc7, etc.) - ocscp_producer_host (for example, udm1svc.default.svc.cluster.local) - ocscp_response_code (for example, 503 SERVICE_UNAVAILABLE, 504 GATEWAY_TIMEOUT) - ocscp_nf_setid(e.g, set1.udmset.5gc.mnc012.mcc345, default value = "UNKNOWN") - ocscp_fqdn

Table 5-44 (Cont.) ocscp_metric_upstream_response_timeout_total

Field	Details
Example	<pre>ocscp_metric_upstream_response_timeout_total{ ocscp_nf_type="UDM"} ocscp_metric_upstream_response_timeout_total{ocscp_location="Loc7"} ocscp_metric_upstream_response_timeout_total{ocscp_service_type=" nudm-uecm"} ocscp_metric_upstream_response_timeout_total{ocscp_processing_time="29"} ocscp_metric_upstream_response_timeout_total{ocscp_response_code="504 GATEWAY_TIMEOUT"} ocscp_metric_upstream_response_timeout_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} ocscp_metric_upstream_response_timeout_total{ocscp_nf_setid="set1.udmset.5gc.mnc012.mcc345"}</pre>

Table 5-45 ocscp_metric_http_streaminfo_create_total

Field	Details
Description	Captures information of application, microservice, fqdn and vendor whenever StreamInfo Object is initialized. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	ocscp_fqdn
Example	<pre>ocscp_metric_http_streaminfo_create_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</pre>

Table 5-46 ocscp_metric_http_streaminfo_delete_total

Field	Details
Description	Captures information of application, microservice, fqdn and vendor just before StreamInfo Object is destroyed before the garbage collection. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	ocscp_fqdn
Example	<pre>ocscp_metric_http_streaminfo_delete_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</pre>

Table 5-47 ocscp_upstream_rq_pending_overflow_total

Field	Details
Description	Captures total number of requests for which circuit has been broken due to http2MaxLimit reached for outstanding requests.
Type	Counter
Dimension	- ocscp_nf_type(for example, UDM, PCF, AMF, etc.) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, etc.) - ocscp_locality(SCP site name for example, Loc6, Loc7, etc.) - ocscp_producer_host(for example, udm1svc.default.svc.cluster.local) - ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA) - ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA) - ocscp_fqdn (contains fqdn of scp)
Example	<pre>ocscp_upstream_rq_pending_overflow_total{ ocscp_nf_type="UDM"}</pre> <pre>ocscp_upstream_rq_pending_overflow_total{ocscp_nf_service_type=" nudm-uecm"}</pre> <pre>ocscp_upstream_rq_pending_overflow_total{ocscp_locality="Loc7"}</pre> <pre>ocscp_upstream_rq_pending_overflow_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"}</pre> <pre>ocscp_upstream_rq_pending_overflow_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}</pre> <pre>ocscp_upstream_rq_pending_overflow_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}</pre> <pre>ocscp_upstream_rq_pending_overflow_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</pre>

Table 5-48 ocscp_circuit_breaking_applied

Field	Details
Description	Indicates the circuit breaking state. If outstanding request limit has been reached then gauge will show 1 otherwise 0.
Type	Gauge

Table 5-48 (Cont.) ocscp_circuit_breaking_applied

Field	Details
Dimension	• ocscp_nf_type(for example, UDM, PCF, AMF, etc.) • ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, etc.) • ocscp_locality (SCP site name for example, Loc6, Loc7, etc.) • ocscp_producer_host (for example, udm1svc.default.svc.cluster.local) • ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA) • ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA) • ocscp_fqdn (contains fqdn of scp)
Example	<pre>ocscp_circuit_breaking_applied{ ocscp_nf_type="UDM"} ocscp_circuit_breaking_applied{ocscp_nf_service_type=" nudm-uecm"} ocscp_circuit_breaking_applied{ocscp_locality="Loc7"} ocscp_circuit_breaking_applied{ocscp_producer_host="udm 1svc.default.svc.cluster.local"} ocscp_circuit_breaking_applied{ocscp_producer_nf_instanc e_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} ocscp_circuit_breaking_applied{ocscp_fqdn="ocscp-scp- worker.scpsvc.svc.cluster.local"}</pre>

Table 5-49 ocscp_configuration_tx_res_total

Field	Details
Description	Indicates the number of times the configuration microservice receives request from users.
Type	Counter

Table 5-49 (Cont.) ocscp_configuration_tx_res_total

Field	Details
Dimension	- configurationName(GatewayDetails, LogLevels, MediationTriggerPointConfig, MessagePriority, NrfDetails, ScpProfile, ServerHeader, SystemOptions, TracingOptions, AlternateNFGroup, canary_release_config_set, CircuitBreakingConfigs, IngressRateLimitConsumerInfo, EgressRateLimiter, ErrorProfileConfig, nftype_nfservice_config, IngressRateLimiter, MediationTriggerPointConfiguration, NfServiceConfig, NfServiceConfigSet, NrfConfiguration, NRF_FQDN_InstanceId_Mapping, NrfSrvConfig, oauth2, support, OciConfig, OciThresholdConfig, OcscpRoutingConfigSet, ocscp_routing_options_config, OutlierDetectionConfigs, RouteGroup, RoutingOptionsConfig, SbiMessagePriority, ScpFeaturesInfo, ScpFeatureStatus, ScpServiceConfigs, SeppInterPlmnInfo, 5gsbitrafficfeed, traffic_feed_data_director_config, traffic_feed_trigger_point_config, WorkerPodOverloadActionPolicy, WorkerPodOverloadCtrlPolicy, WorkerPodOverloadDiscardPolicy) - requestType(GET, PUT, DELETE) - responseCode - ocscp_fqdn
Example	ocscp_configuration_tx_res_total{configurationName="Systemoptions"} ocscp_configuration_tx_res_total{requestType="PUT"} ocscp_configuration_tx_res_total{responseCode="200"} ocscp_configuration_tx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-50 ocscp_rx_configuration_total

Field	Details
Description	Indicates the number of times the configuration microservice responds to users either with a successful or failure response.
Type	Counter

Table 5-50 (Cont.) ocscp_rx_configuration_total

Field	Details
Dimension	- configurationName (GatewayDetails, LogLevels, MediationTriggerPointConfig, MessagePriority, NrfDetails, ScpProfile, ServerHeader, SystemOptions, TracingOptions, AlternateNFGroup, canary_release_config_set, CircuitBreakingConfigs, IngressRateLimitConsumerInfo, EgressRateLimiter, ErrorProfileConfig, nftype_nfservice_config, IngressRateLimiter, MediationTriggerPointConfiguration, NfServiceConfig, NfServiceConfigSet, NrfConfiguration, NRF_FQDN_InstanceId_Mapping, NrfSrvConfig, oauth2_support, OciConfig, OciThresholdConfig, OcscpRoutingConfigSet, ocscp_routing_options_config, OutlierDetectionConfigs, RouteGroup, RoutingOptionsConfig, SbiMessagePriority, ScpFeaturesInfo, ScpFeatureStatus, ScpServiceConfigs, SepplnterPlmnInfo, 5gsbitrafficfeed, traffic_feed_data_director_config, traffic_feed_trigger_point_config, WorkerPodOverloadActionPolicy, WorkerPodOverloadCtrlPolicy, WorkerPodOverloadDiscardPolicy) - requestType(GET, PUT, DELETE) - ocscp_fqdn
Example	<pre>ocscp_rx_configuration_total{configurationName="SystemOptions"} ocscp_rx_configuration_total{requestType="PUT"} ocscp_rx_configuration_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</pre>

Table 5-51 ocscp_notification_all_routing_rules_deleted_total

Field	Details
Description	Indicates no of times all routing rules are deleted.
Type	Counter
Dimension	- nftype (for example: UDM, AMF) - ocscp_fqdn
Example	- ocscp_notification_all_routing_rules_deleted_total{nftype="UDM"} - ocscp_notification_all_routing_rules_deleted_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-52 ocscp_no_nf_instance

Field	Details
Description	Indicates the number of NF instances available for NFType. 0 indicates a single NF instance is available for nftype. 1 indicates no NF instance is available for nftype.
Type	Gauge

Table 5-52 (Cont.) ocscp_no_nf_instance

Field	Details
Dimension	• nftype (for example: UDM, AMF) • ocscp_fqdn
Example	• ocscp_no_nf_instance{nftype="UDM"} • ocscp_no_nf_instance{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-53 ocscp_metric_egress_rate_limiting_not_applied_req_total

Field	Details
Description	Increments when SCP-Worker allows a request to proceed without egress rate limiting treatment and records the reason.
Type	Counter
Dimension	• ocscp_nf_type • ocscp_nf_service_type • ocscp_producer_nf_instance_id • ocscp_producer_host • ocscp_cause • ocscp_egress_rl_bucketkey • ocscp_authority when enabled or available
Example	ocscp_metric_egress_rate_limiting_not_applied_req_total{ocscp_nf_type="UDM",ocscp_nf_service_type="n5g-eir-eic",ocscp_producer_nf_instance_id="producer-inst-001",ocscp_producer_host="udm01.example.com",ocscp_cause="CONFIGURATION_NOT_FOUND",ocscp_egress_rl_bucketkey="producer-udm",ocscp_authority="scp-worker.scpsvc.svc.cluster.local"}

Table 5-54 ocscp_metric_egress_rate_limiting_alternate_routed_req_total

Field	Details
Description	Indicates the number of messages on which OCI is enforced causing those messages to be responded with error or sent to reselected NFs.
Type	Counter
Dimension	• ocscp_nf_type • ocscp_nf_service_type • ocscp_producer_nf_instance_id • ocscp_producer_host • ocscp_egress_rl_bucketkey • ocscp_fqdn • ocscp_consumer_host • ocscp_consumer_nf_instance_id • ocscp_consumer_nf_type

Table 5-54 (Cont.) ocscp_metric_egress_rate_limiting_alternate_routed_req_total

Field	Details
Example	- ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_nf_type="UDM"} - ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp.egress.rl.bucketkey="egress_6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"} - ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_metric_egress_rate_limiting_alternate_routed_req_total{ocscp_consumer_nf_type="SMF"}

Table 5-55 ocscp_metric_egress_rate_limiting_throttle_req_total

Field	Details
Description	Number of requests throttled due to egress rate limiting
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_configured_egress_rate - ocscp_egress_rl_bucketkey - ocscp_fqdn - ocscp_consumer_host
Example	- ocscp_metric_egress_rate_limiting_throttle_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_egress_rate_limiting_throttle_req_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_egress_rate_limiting_throttle_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_egress_rate_limiting_throttle_req_total{ocscp_nf_type="UDM"} - ocscp_metric_egress_rate_limiting_throttle_req_total{ocscp.egress.rl.bucketkey="egress_6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"}

Table 5-56 ocscp_metric_ingress_rate_limiting_not_applied_req_total

Field	Details
Description	Number of requests routed without ingress rate limiting treatment
Type	Counter
Dimension	- ocscp_consumer_nf_type - ocscp_consumer_host - ocscp_consumer_nf_instance_id - ocscp_ingress_rl_headername - ocscp_ingress_rl_headerformat - ocscp_cause - ocscp_ingress_rl_bucketkey - ocscp_fqdn
Example	- ocscp_metric_ingress_rate_limiting_not_applied_req_tot al{ ocscp_nf_type="UDM"} - ocscp_metric_ingress_rate_limiting_not_applied_req_tot al{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"} - ocscp_metric_ingress_rate_limiting_not_applied_req_tot al{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_ingress_rate_limiting_not_applied_req_tot al{ocscp_ingress_rl_headername="User-Agent"} - ocscp_metric_ingress_rate_limiting_not_applied_req_tot al{ocscp_ingress_rl_headerformat="NFTYPE-FQDN NFINSTANCEID"} - ocscp_metric_ingress_rate_limiting_not_applied_req_tot al{ocscp_cause="CONFIGURATION_NOT_FOUND"} - ocscp_metric_ingress_rate_limiting_not_applied_req_tot al{ocscp.ingress.rl.bucketkey="ingress_6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_ingress_rate_limiting_not_applied_req_tot al{scp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-57 ocscp_metric_ingress_rate_limiting_throttle_req_total

Field	Details
Description	Number of requests throttled due to ingress rate limiting
Type	Counter
Dimension	- ocscp_consumer_nf_type - ocscp_consumer_nf_instance_id - ocscp_consumer_host - ocscp_configured_ingress_rate - ocscp_ingress_rl_bucketkey - ocscp_fqdn - ocscp_ingress_rl_headername - ocscp_ingress_rl_headerformat

Table 5-57 (Cont.) ocscp_metric_ingress_rate_limiting_throttle_req_total

Field	Details
Example	- ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_nf_type="UDM"} - ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"} - ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_ingress_rl_headername="User-Agent"} - ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_ingress_rl_headerformat="NFTYPE-FQDN-NFINSTANCEID"} - ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_configured_ingress_rate="40 messages per 1 seconds with Burst of 100 %"} - ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp.ingress.rl.bucketkey="ingress_6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_ingress_rate_limiting_not_applied_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_ingress_rate_limiting_throttle_req_total{app="ocscp-scp-worker",app_kubernetes_io_component="microService",app_kubernetes_io_instance="ocscp",app_kubernetes_io_managed_by="Helm",app_kubernetes_io_name="scp-worker",app_kubernetes_io_part_of="ocscp",app_kubernetes_io_version="22.4.0.0",application_name="ocscp",coherenceCluster="scp-coherence-cluster",exported_vendor="Oracle",helm_sh_chart="scp-worker-22.4.0",instance="192.168.141.38:8091",job="kubernetes-pods",kubernetes_namespace="scpsvc",kubernetes_pod_name="ocscp-scp-worker-5897bd5b76-wvbm",microservice="scp-worker",ocscp_configured_ingress_rate="40 messages per 1 seconds with Burst of 100 %",ocscp_consumer_fqdn="smf1svc.scpsvc.svc.cluster.local",ocscp_consumer_nf_instance_id="2faf1bbc-6e4a-4454-acd7-a14ef8efbc6b",ocscp_consumer_nf_type="SMF",ocscp_ingress_rl_bucketkey="ingress_2faf1bbc-6e4a-4454-acd7-a14ef8efbc6b",ocscp_ingress_rl_headerformat="NFTYPE-FQDN",ocscp_ingress_rl_headername="User-Agent",pod_template_hash="5897bd5b76",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="oracle"}

Table 5-58 ocscp_notification_received_different_nrfregionorsetid_total

Field	Details
Description	Number of duplicate notifications skipped with the nrfRegionOrSetId update
Type	Counter
Dimension	• nfType • nfiInstanceId • nrfRegionOrSetId • ocscp_fqdn
Example	ocscp_notification_received_different_nrfregionorsetid_total{nfType="UDM"} ocscp_notification_received_different_nrfregionorsetid_total{nfiInstanceId="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} ocscp_notification_received_different_nrfregionorsetid_total{nrfRegionOrSetId="Reg1"} ocscp_notification_received_different_nrfregionorsetid_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-59 ocscp_audit_2xx_empty_nf_array_rx_total

Field	Details
Description	Number of 2xx responses with empty body
Type	Counter
Dimension	• nrfRegionOrSetId • nfType • ocscp_fqdn
Example	ocscp_audit_2xx_empty_nf_array_rx_total{nrfRegionOrSetId="Reg2"} ocscp_audit_2xx_empty_nf_array_rx_total{nfType="UDM"} ocscp_audit_2xx_empty_nf_array_rx_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-60 ocscp_audit_nrf_failure_response_rx_total

Field	Details
Description	Number of failed responses received from NRF for SCP audit
Type	Counter
Dimension	• nrfRegionOrSetId • nfType • ocscp_fqdn
Example	ocscp_audit_nrf_failure_response_rx_total{nrfRegionOrSetId="Reg1"} ocscp_audit_nrf_failure_response_rx_total{nfType="AUSF"} ocscp_audit_nrf_failure_response_rx_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-61 ocscp_notification_request_total

Field	Details
Description	Pegs the number of notifications received on the notification module, which includes notifications from sources NRF, AUDIT, and RECONFIGURATION, except for the NF profile notification with invalid JSON.
Type	Counter
Dimension	• nfType • eventType • nfStatus • nfInstanceId • notificationSource • nrfRegionOrSetId • ocscp_fqdn
Example	• ocscp_notification_request_total{eventType="NF_REGISTERED"} • ocscp_notification_request_total{eventType="NF_DEREGISTERED"} • ocscp_notification_request_total{eventType="NF_DELETED"} • ocscp_notification_request_total{eventType="NF_CLEARED"} • ocscp_notification_request_total{nfStatus="REGISTERED"} • ocscp_notification_request_total{nfType="UDM"} • ocscp_notification_request_total{nfInstanceId="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} • ocscp_notification_request_total{notificationSource="NRF"} • ocscp_notification_request_total{nrfRegionOrSetId="Reg1"} • ocscp_notification_request_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-62 ocscp_audit_tx_req_total

Field	Details
Description	This metric pegs the number of times audit requests are initiated for particular NFType, nrfRegionOrSetId, and nrfHost by SCPC-Audit. This metric is pegged for both scheduled and onDemand audits.
Type	Counter
Dimension	• nfType • nrfRegionOrSetId • auditMode • auditType • nrfHost • ocscp_scp_instance_id • operation

Table 5-62 (Cont.) ocscp_audit_tx_req_total

Field	Details
Example	ocscp_audit_tx_req_total{nfType="UDM", nrfRegionOrSetId="nrf-set-1", auditMode="nnrf-disc", auditType="scheduled", nrfHost="nrf01.example.com", ocscp_scp_instance_id="scp-inst-001", operation="DISC_QUERY_RATE"}

Table 5-63 ocscp_audit_rx_res_total

Field	Details
Description	This metric pegs the number of times a response has been received for an initiated audit request. This metric is pegged for the scheduled Audit cycle.
Type	Counter
Dimension	• nfType • responseCodeClass • responseCode • nrfRegionOrSetId • auditMode • auditType • nrfHost
Example	ocscp_audit_rx_res_total{nfType="UDM", responseCodeClass="2xx", responseCode="200", nrfRegionOrSetId="nrf-set-1", auditMode="nnrf-disc", auditType="scheduled", nrfHost="nrf01.example.com" }

Table 5-64 ocscp_metric_interscp_http_tx_req_total

Field	Details
Description	Number of HTTP requests forwarded to the next hop SCP. Here, the dimension ocscp_producer_nf_instance_id indicates the ninstanceid of nexthopscp, and the dimension ocscp_producer_service_instance_id indicates the service instance ID of nexthopscp. The ocscp_nf_service_type dimension for notification is "n<nfType>-unknown or NA-unknown". Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter

Table 5-64 (Cont.) ocscp_metric_interscp_http_tx_req_total

Field	Details
Dimension	Non OCI Dimensions - ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_scp_end_point (Default value = NA, scp51svc.default.svc.cluster.local:8080) - ocscp_producer_nf_fqdn (default value = NA, Contains fqdn of NF pcf1svc.default.svc.cluster.local) - ocscp_nexthop_scp_fqdn (contains fqdn of other scp scp51svc.default.svc.cluster.local) - ocscp_fqdn (contains fqdn of scp ocscp-scp-worker.scp51svc.svc.cluster.local) Non OCI Dimensions - NFSERVICETYPE - SCPENDPOINT - NfId - PRODUCERNFFQDN - NEXTHOPSCPFQDN - NFSETID - SCPAUTHORITY
Example	- ocscp_metric_interscp_http_tx_req_total{ocscp_nf_type="PCF"} - ocscp_metric_interscp_http_tx_req_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_metric_interscp_http_tx_req_total{ocscp_scp_end_point="10.96.166.65:80"} - ocscp_metric_interscp_http_tx_req_total - ocscp_metric_interscp_http_tx_req_total{ocscp_producer_nf_fqdn="pcf1svc.default.svc.cluster.local"} - ocscp_metric_interscp_http_tx_req_total{ocscp_nexthop_scp_fqdn="scp51svc.default.svc.cluster.local"} - ocscp_metric_interscp_http_tx_req_total{ocscp_fqdn="scp-scp-worker.scp51svc.svc.cluster.local"}

Table 5-65 ocscp_metric_interscp_http_rx_res_total

Field	Details
Description	Number of HTTP responses received from SCP with specific HTTP response codes, for example, 201, 503, and so on. Here, the dimension ocscp_producer_nf_instance_id indicates the ninstanceid of the nexthopsc, and the dimension ocscp_producer_service_instance_id indicates the service instance ID of the nexthopsc. The ocscp_nf_service_type dimension for notification is "n<nfType>-unknown or NA-unknown". Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter

Table 5-65 (Cont.) ocscp_metric_interscp_http_rx_res_total

Field	Details
Dimension	Non OCI Dimensions • ocscp_response_code (e.g., 201, 503, 404, etc.) • ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) • ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm,npcf-smpolicycontrol etc.) • ocscp_scp_end_point (Default value = NA, scp52svc.default.svc.cluster.local:8080) • ocscp_locality (SCP own locality e.g., Loc6, Loc7, etc.) • ocscp_response_code_class (e.g., 2, 5, etc.) • ocscp_producer_nf_fqdn (default value = NA, Contains fqdn of NF pcf1svc.default.svc.cluster.local) • ocscp_nexthop_scp_fqdn(contains fqdn of other scp scp51svc.default.svc.cluster.local) • ocscp_fqdn(contains fqdn of scp) OCI Dimensions • NFSERVICETYPE • SCPENDPOINT • Nfid • RESPONSECODE • RESPONSEMSGSIZE • PRODUCERNFFQDN • NEXTHOPSCPFQDN • NFSETID • SCPAUTHORITY
Example	• ocscp_metric_interscp_http_rx_res_total{ocscp_response_code="201"} • ocscp_metric_interscp_http_rx_res_total{ocscp_nf_type="PCF"} • ocscp_metric_interscp_http_rx_res_total{ocscp_nf_service_type="npcf-smpolicycontrol"} • ocscp_metric_interscp_http_rx_res_total{ocscp_scp_end_point="scp52svc.default.svc.cluster.local:8080"} • ocscp_metric_interscp_http_rx_res_total{ocscp_locality="Loc7"} • ocscp_metric_interscp_http_rx_res_total{ocscp_response_code_class="2"} • ocscp_metric_interscp_http_rx_res_total{ocscp_producer_nf_fqdn="pcf1svc.default.svc.cluster.local"} • ocscp_metric_interscp_http_rx_res_total{ocscp_nexthop_scp_fqdn="scp51svc.default.svc.cluster.local"} • ocscp_metric_interscp_http_rx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-66 ocscp_metric_jetty_client_requests_total

Field	Details
Description	Number of HTTP requests sent to producer NFs by the Jetty client.
Type	Counter

Table 5-66 (Cont.) ocscp_metric_jetty_client_requests_total

Field	Details
Dimension	- eventtype(eg., onQueued, onBegin, onHeaders, onCommit, onContent, onSuccess, onFailure) - ocscp_fqdn(contains fqdn of scp)
Example	- ocscp_metric_jetty_client_requests_total(eventtype="onBegin") - ocscp_metric_jetty_client_requests_total(ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local")

Table 5-67 ocscp_worker_pod_overload_discard_req_total

Field	Details
Description	Counts requests discarded with an error response when SCP-Worker pod overload control is active, including overload caused by CPU utilization or pending transactions exceeding configured thresholds.
Type	Counter
Dimension	- ocscp_consumer_nf_type - ocscp_consumer_nf_instance_id - ocscp_producer_host - ocscp_pod_overload_discard_by - ocscp_threshold_level - http_method - sbi_message_priority - ocscp_consumer_host when enabled or available - ocscp_consumer_nf_unique_id when enabled or available
Example	ocscp_worker_pod_overload_discard_req_total{ocscp_consumer_nf_type="AMF",ocscp_consumer_nf_instance_id="amf-inst-001",ocscp_producer_host="udm01.example.com",ocscp_pod_overload_discard_by="CPU",ocscp_threshold_level="major",http_method="GET",sbi_message_priority="10",ocscp_consumer_host="amf01.example.com",ocscp_consumer_nf_unique_id="amf-unique-001"}

Table 5-68 ocscp_alterate_resolution_dnssrv_req_total

Field	Details
Description	Indicates the total number of requests sent to DNS SRV.
Type	Counter
Dimension	- ocscp_fqdn - service_proto_name
Example	- ocscp_alterate_resolution_dnssrv_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_alterate_resolution_dnssrv_req_total{service_proto_name="_http._tcp.nf2stub.scpsvc.svc"}

Table 5-69 ocscp_alternate_resolution_dnssrv_res_total

Field	Details
Description	Indicates the total number of DNS SRV queries received from the DNS server.
Type	Counter
Dimension	- ocscp_fqdn - service_proto_name - status(success/failure) - cause(timed_out, host_not_found, network_error, referral, name_too_long, na, error_at_scp, unknown, servfail)
Example	- ocscp_alternate_resolution_dnssrv_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_alternate_resolution_dnssrv_res_total{service_proto_name="_http._tcp.nf2stub.scpsvc.sv"} - ocscp_alternate_resolution_dnssrv_res_total{status="success"} - ocscp_alternate_resolution_dnssrv_res_total{cause="timed_out", "host_not_found", "network_error", "referral", "name_too_long", "na", "error_at_scp", "unknown", "servfail"}

Table 5-70 ocscp_metric_http_ar_tx_req_total

Field	Details
Description	Indicates the total number of alternate route attempts or reselection attempts made by SCP. Note: Here, the instanceid of SEPP or custom roaming proxy is used for interplmn scenarios, the instanceid of SCP is used for inter-scp scenarios, otherwise, the instanceid of the producer is utilized. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_primary_producer_fqdn - PrimaryEndPoint={}, - ocscp_alternate_producer_host - ocscp_alternate_nf_end_point - ocscp_alternate_route_type - alternate_route_cause Note: In the notification message type, certain dimension values such as ocscp_nf_service_type, ocscp_nf_setid, and ocscp_nf_type may not qualify for pegging. In the scenario where the service name cannot be derived from the PATH URI, pegging will not take place, and if these dimensions are identified through headers, pegging will occur.

Table 5-70 (Cont.) ocscp_metric_http_ar_tx_req_total

Field	Details
Example	- ocscp_metric_http_ar_tx_req_total{ocscp_alternate_route_type="DNS_SRV"} - ocscp_metric_http_ar_tx_req_total{ocscp_alternate_route_type="STATIC_CONFIG"} - ocscp_metric_http_ar_tx_req_total{ocscp_nf_type="PCF"} - ocscp_metric_http_ar_tx_req_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_metric_http_ar_tx_req_total{ocscp_alternate_nf_end_point="pcf2svc.default.svc.cluster.local:8080"} - ocscp_metric_http_ar_tx_req_total{ocscp_primary_producer_fqdn="pcf1svc.default.svc.cluster.local"} - ocscp_metric_http_ar_tx_req_total{="pcf2svc.default.svc.cluster.local"}ocscp_alternate_producer_host - ocscp_metric_http_ar_tx_req_total{alternate_route_cause="Timeout"}

Table 5-71 ocscp_metric_sidecarproxy_failures_total

Field	Details
Description	Number of error responses received from service mesh sidecar proxy because of transport error towards producer NFs.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) - ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA) - ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_fqdn - response_code - ocscp_server_header

Table 5-71 (Cont.) ocscp_metric_sidecarproxy_failures_total

Field	Details
Example	- ocscp_metric_sidecarproxy_failures_total{ocscp_nf_type="UDM"} - ocscp_metric_sidecarproxy_failures_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_sidecarproxy_failures_total{ocscp_locality="Loc7"} - ocscp_metric_sidecarproxy_failures_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_sidecarproxy_failures_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} - ocscp_metric_sidecarproxy_failures_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_sidecarproxy_failures_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_sidecarproxy_failures_total{ocscp_response_code="503"} - ocscp_metric_sidecarproxy_failures_total{ocscp_server_header="envoy"}

Table 5-72 ocscp_metric_remote_response_without_server_header_total

Field	Details
Description	Number of times SCP adds the server header in the error response received from producer NFs without server header.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) - ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA) - ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_fqdn

Table 5-72 (Cont.) ocscp_metric_remote_response_without_server_header_total

Field	Details
Example	- ocscp_metric_remote_response_without_server_header_total{ocscp_nf_type="UDM"} - ocscp_metric_remote_response_without_server_header_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_remote_response_without_server_header_total{ocscp_locality="Loc7"} - ocscp_metric_remote_response_without_server_header_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_remote_response_without_server_header_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} - ocscp_metric_remote_response_without_server_header_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_remote_response_without_server_header_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-73 ocscp_metric_add_or_update_server_header_custom_behavior_total

Field	Details
Description	Number of times SCP adds or updates the server header in the error response received from producer NFs.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) - ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA) - ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_fqdn

Table 5-73 (Cont.) ocscp_metric_add_or_update_server_header_custom_behavior_total

Field	Details
Example	- ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_nf_type="UDM"} - ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_locality="Loc7"} - ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} - ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_add_or_update_server_header_custom_behavior_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-74 ocscp_metric_add_or_update_server_header_custom_behavior_v2_total

Field	Details
Description	Number of times SCP adds or updates the server header for the enhancement V2 behavior in the following scenarios: - In all the error scenarios when SCP attempts on multiple producer NFs or alternate routes. - SCP attempts on a single producer NF and observed a connection error/timeout, error/unknown, error/received an error response without the server header.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on) - ocscp_locality (SCP site name, for example, Loc6, Loc7, and so on) - ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c. Default value = NA) - ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02. Default value = NA) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_fqdn

Table 5-74 (Cont.) ocscp_metric_add_or_update_server_header_custom_behavior_v2_total

Field	Details
Example	- ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_nf_type="UDM"} - ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_locality="Loc7"} - ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} - ocscp_metric_add_or_update_server_header_custom_behavior_v2_total(ocscp_producer_host="udm1svc.default.svc.cluster.local") - ocscp_metric_add_or_update_server_header_custom_behavior_v2_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-75 ocscp_metric_add_server_header_default_behavior_total

Field	Details
Description	Number of times SCP adds the server header in the error response received from producer NFs.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) - ocscp_producer_nf_instance_id (e.g., 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, etc. Default value = NA) - ocscp_producer_service_instance_id (e.g., fe137ab7-740a-46ee-aa5c-951806d77b02, etc. Default value = NA) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_fqdn

Table 5-75 (Cont.) ocscp_metric_add_server_header_default_behavior_total

Field	Details
Example	- ocscp_metric_add_server_header_default_behavior_total{ocscp_nf_type="UDM"} - ocscp_metric_add_server_header_default_behavior_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_add_server_header_default_behavior_total{ocscp_locality="Loc7"} - ocscp_metric_add_server_header_default_behavior_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c"} - ocscp_metric_add_server_header_default_behavior_total{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"} - ocscp_metric_add_server_header_default_behavior_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_metric_add_server_header_default_behavior_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-76 ocscp_metric_failure_from_peer_scp_total

Field	Details
Description	Number of times SCP receives error responses with server header containing only the next hop FQDN of SCP.
Type	Counter
Dimension	- ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) - ocscp_peer_scp_fqdn (default value = NA, Contains fqdn of producer) - ocscp_fqdn
Example	- ocscp_metric_failure_from_peer_scp_total{ocscp_locality="Loc7"} - ocscp_metric_failure_from_peer_scp_total{ocscp_peer_scp_fqdn="udm1svc.default.svc.cluster.local"} - ocscp_metric_failure_from_peer_scp_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-77 ocscp_peer_scp_unhealthy

Field	Details
Description	Displays whether the peer SCP identified by the metric labels is currently marked unavailable or unhealthy.
Type	Gauge
Dimension	- ocscp_peer_scp_host - ocscp_locality
Example	ocscp_peer_scp_unhealthy{ocscp_peer_scp_host="scp02.example.com",ocscp_locality="local"}

Table 5-78 ocscp_alterate_resolution_dnssrv_rx_error_res

Field	Details
Description	Indicates failed DNS SRV query responses.
Type	Gauge
Dimension	- cause (network_error, servfail, timed_out) - ocscp_fqdn (ocscp-scp-worker.scpsvc.svc.cluster.local)
Example	- ocscp_alterate_resolution_dnssrv_rx_error_res {cause="timed_out", "host_not_found", "network_error", "referral", "name_too_long", "na", "error_at_scp", "unknown", "servfail"} - ocscp_alterate_resolution_dnssrv_rx_error_res {ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-79 ocscp_load_manager_peer_load_throttled_threshold

Field	Details
Description	Indicates that the peer load has exceeded the Throttled threshold. This metric is pegged by the load manager pod.
Type	Gauge
Dimension	- ocscp_peer_fqdn - ocscp_peer_nf_instance_id - ocscp_peer_service_instance_id - ocscp_peer_service_name
Example	ocscp_load_manager_peer_load_throttled_threshold{ocscp_peer_fqdn="smf1svc.scpsvc.svc.cluster.local",ocscp_peer_nf_instance_id="11111112-aaaa-aaaa-aaaa-111111111111",ocscp_peer_service_instance_id="3aad8c63-0cc0-4b74-9582-4e6475214ae8",ocscp_peer_service_name="nsmf-pdusession"}

Table 5-80 ocscp_load_manager_peer_load_alterateRoute_threshold

Field	Details
Description	Indicates that the peer load has exceeded the Alternate Route state threshold. This metric is pegged by the load manager pod.
Type	Gauge
Dimension	- ocscp_peer_fqdn - ocscp_peer_nf_instance_id - ocscp_peer_service_instance_id - ocscp_peer_service_name
Example	ocscp_load_manager_peer_load_alterateRoute_threshold{ocscp_peer_fqdn="smf1svc.scpsvc.svc.cluster.local",ocscp_peer_nf_instance_id="11111112-aaaa-aaaa-aaaa-111111111111",ocscp_peer_service_instance_id="3aad8c63-0cc0-4b74-9582-4e6475214ae8",ocscp_peer_service_name="nsmf-pdusession"}

Table 5-81 ocscp_metric_ondemand_discovery_tx_req_total

Field	Details
Description	Number of times SCP worker sends on-demand discovery request to nrfproxy.
Type	Counter
Dimension	- ocscp_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.) - ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_fqdn - subscriber_info_present_in_discovery_headers (If any of the following discovery headers is present in the request: 3gpp-sbi-discovery-supi, 3gpp-sbi-discovery-gpsi, 3gpp-sbi-discovery-external-group-identity, 3gpp-sbi-discovery-routing-indicator, 3gpp-sbi-discovery-msisd, 3gpp-sbi-discovery-imsi) - ocscp_consumer_host
Example	- ocscp_metric_ondemand_discovery_tx_req_total{ocscp_nf_type="UDM"} - ocscp_metric_ondemand_discovery_tx_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_ondemand_discovery_tx_req_total{ocscp_requester_nf_type="UDM"}

Table 5-82 ocscp_metric_ondemand_discovery_rx_res_total

Field	Details
Description	Number of times SCP worker receives on-demand discovery response from nrfproxy.
Type	Counter
Dimension	- ocscp_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.) - ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_fqdn - ocscp_response_code - ocscp_response_code_class - subscriber_info_present_in_discovery_headers - ocscp_consumer_host
Example	- ocscp_metric_ondemand_discovery_rx_res_total{ocscp_nf_type="UDM"} - ocscp_metric_ondemand_discovery_rx_res_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_ondemand_discovery_rx_res_total{ocscp_requester_nf_type="AMF"} - ocscp_metric_ondemand_discovery_rx_res_total{ocscp_response_code="201"} - ocscp_metric_ondemand_discovery_rx_res_total{ocscp_response_code_class="2"}

Table 5-83 ocscp_metric_ondemand_discovery_cache_match_total

Field	Details
Description	Number of times SCP worker is able to resolve discovery requests using local cache.
Type	Counter
Dimension	- ocscp_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.) - ocscp_consumer_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_fqdn - subscriber_info_present_in_discovery_headers
Example	- ocscp_metric_ondemand_discovery_cache_match_total{ocscp_nf_type="UDM"} - ocscp_metric_ondemand_discovery_cache_match_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_ondemand_discovery_cache_match_total{ocscp_consumer_nf_type="AMF"}

Table 5-84 ocscp_nrf_nf_discovery_tx_req_total

Field	Details
Description	The total number of discovery requests sent to NRF by nrfproxy.
Type	Counter
Dimension	- ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.) - ocscp_fqdn - subscriber_info_present (If any of the following discovery headers present in the request: 3gpp-sbi-discovery-supi, 3gpp-sbi-discovery-gpsi, 3gpp-sbi-discovery-external-group-identity, 3gpp-sbi-discovery-routing-indicator, 3gpp-sbi-discovery-msisdn, 3gpp-sbi-discovery-imsi) - is_inter_plmn (e.g.: true for inter plmn; false for intra plmn)
Example	- ocscp_nrf_nf_discovery_tx_req_total{ocscp_producer_nf_type="UDM"} - ocscp_nrf_nf_discovery_tx_req_total{ocscp_requester_nf_type="AMF"} - ocscp_nrf_nf_discovery_tx_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_nrf_nf_discovery_tx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-85 ocscp_nrf_nf_discovery_rx_res_total

Field	Details
Description	The total number of discovery responses received from NRF by nrfproxy.

Table 5-85 (Cont.) ocscp_nrf_nf_discovery_rx_res_total

Field	Details
Type	Counter
Dimension	- ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.) - ocscp_fqdn - subscriber_info_present - is_inter_plmn - status_code
Example	- ocscp_nrf_nf_discovery_rx_res_total{ocscp_producer_nf_type="UDM"} - ocscp_nrf_nf_discovery_rx_res_total{ocscp_requester_nf_type="AMF"} - ocscp_nrf_nf_discovery_rx_res_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_nrf_nf_discovery_rx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_nrf_nf_discovery_rx_res_total{status_code="200"}

Table 5-86 ocscp_nrf_nf_discovery_rx_req_total

Field	Details
Description	The total number of discovery requests received by nrfproxy from SCP worker.
Type	Counter
Dimension	- ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.) - ocscp_fqdn - subscriber_info_present - is_inter_plmn
Example	- ocscp_nrf_nf_discovery_rx_req_total{ocscp_producer_nf_type="UDM"} - ocscp_nrf_nf_discovery_rx_req_total{ocscp_requester_nf_type="AMF"} - ocscp_nrf_nf_discovery_rx_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_nrf_nf_discovery_rx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-87 ocscp_nrf_nf_discovery_tx_res_total

Field	Details
Description	The total number of discovery responses sent by nrfproxy to SCP worker.
Type	Counter

Table 5-87 (Cont.) ocscp_nrf_nf_discovery_tx_res_total

Field	Details
Dimension	- ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.) - ocscp_fqdn - subscriber_info_present - is_inter_plmn - status_code - is_from_local_cache (Whether the discovery process was made from local cache (true) or NRF (false))
Example	- ocscp_nrf_nf_discovery_tx_res_total{ocscp_producer_nf_type="UDM"} - ocscp_nrf_nf_discovery_tx_res_total{ocscp_requester_nf_type="AMF"} - ocscp_nrf_nf_discovery_tx_res_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_nrf_nf_discovery_tx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_nrf_nf_discovery_tx_res_total{status_code="200"}

Table 5-88 ocscp_nrfproxy_generated_error_response_total

Field	Details
Description	The total number of error responses generated by nrfproxy excluding NRF returned errors.
Type	Counter
Dimension	- ocscp_producer_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_requester_nf_type (e.g.: UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g.: nudm-uecm, nudm-sdm, etc.) - ocscp_fqdn - subscriber_info_present - is_inter_plmn - status_code - valid_NRF_response_to_fail (Whether SCP convert 200 OK (NRF) to 400 error, due to empty profile list or not)
Example	- ocscp_nrfproxy_generated_error_response_total{ocscp_producer_nf_type="UDM"} - ocscp_nrfproxy_generated_error_response_total{ocscp_requester_nf_type="AMF"} - ocscp_nrfproxy_generated_error_response_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_nrfproxy_generated_error_response_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_nrfproxy_generated_error_response_total{status_code="200"}

Table 5-89 ocscp_metric_sepp_http_rx_req_total

Field	Details
Description	Indicates the total number of HTTP requests received from SEPP. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) - plmn_id(mnc123-mcc254) - ocscp_fqdn(contains fqdn of scp) - ocscp_authority
Example	- ocscp_metric_sepp_http_rx_req_total{ocscp_nf_type="UDM"} - ocscp_metric_sepp_http_rx_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_sepp_http_rx_req_total{plmn_id="mnc123-mcc100"}

Table 5-90 ocscp_metric_sepp_http_rx_res_total

Field	Details
Description	Indicates the total number of HTTP responses received from SEPP. The ocscp_nf_service_type dimension for notification is "n<nfType>-unknown or NA-unknown". Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter

Table 5-90 (Cont.) ocscp_metric_sepp_http_rx_res_total

Field	Details
Dimension	Non OCI Dimensions • ocscp_response_code (e.g., 201, 503, 404, etc.) • ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) • ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) • ocscp_nf_end_point (Default value = NA) • ocscp_response_code_class (e.g., 2, 5, etc.) • ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer) • plmn_id(mnc123-mcc254) • ocscp_authority OCI Dimensions • NFSERVICETYPE • NFENDPOINT • NFINSTANCEID • SERVICEINSTANCEID • RESPONSECODE • RESPONSEMSGSIZE • SEPP_FQDN • PLMNID • SCPAUTHORITY
Example	• ocscp_metric_sepp_http_rx_res_total{ocscp_nf_type="UDM"} • ocscp_metric_sepp_http_rx_res_total{ocscp_nf_service_type="nudm-uecm"} • ocscp_metric_sepp_http_rx_res_total{ocscp_sepp_fqdn="sepp1svc.scpsvc.svc.cluster.local"} • ocscp_metric_sepp_http_rx_res_total{plmn_id="mnc123-mcc100"}

Table 5-91 ocscp_metric_sepp_http_tx_res_total

Field	Details
Description	Indicates the total number of HTTP responses routed towards SEPP. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	• ocscp_response_code (e.g., 201, 503, 404, etc.) • ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) • ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) • ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) • ocscp_response_code_class (e.g., 2, 5, etc.) • ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer) • plmn_id(mnc123-mcc254) • ocscp_authority

Table 5-91 (Cont.) ocscp_metric_sepp_http_tx_res_total

Field	Details
Example	- ocscp_metric_sepp_http_tx_res_total{ocscp_nf_type="UDM"} - ocscp_metric_sepp_http_tx_res_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_sepp_http_tx_res_total{ocscp_sepp_fqdn="sepp1svc.scpsvc.svc.cluster.local"} - ocscp_metric_sepp_http_tx_res_total{plmn_id="mnc123-mcc100"}

Table 5-92 ocscp_metric_sepp_http_tx_req_total

Field	Details
Description	Indicates the total number of HTTP requests routed towards SEPP. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on) - ocscp_nf_end_point (Default value = NA) - ocscp_locality (SCP site name, for example, Loc6, Loc7, and so on) - ocscp_producer_nf_instance_id (for example, 6faf1bbc-6e4a-4454-a507-a14ef8e1bc5c, and so on. Default value = NA) - ocscp_producer_service_instance_id (for example, fe137ab7-740a-46ee-aa5c-951806d77b02, and so on, Default value = NA) - ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer) - plmn_id(mnc123-mcc254) - ocscp_authority
Example	- ocscp_metric_sepp_http_tx_req_total{ocscp_nf_type="UDM"} - ocscp_metric_sepp_http_tx_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_sepp_http_tx_req_total{ocscp_sepp_fqdn="sepp1.scpsvc.svc.cluster.local"} - ocscp_metric_sepp_http_tx_req_total{plmn_id="mnc123-mcc100"}

Table 5-93 ocscp_metric_sepp_routing_attempt_fail_total

Field	Details
Description	The total number of inter-PLMN requests routing failed towards SEPP.

Table 5-93 (Cont.) ocscp_metric_sepp_routing_attempt_fail_total

Field	Details
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_nf_end_point (Default value = NA) - ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer) - plmn_id(mnc123-mcc254) - ocscp_authority - ocscp_error_group
Example	- ocscp_metric_sepp_routing_attempt_fail_current{ocscp_nf_type="UDM"} - ocscp_metric_sepp_routing_attempt_fail_current{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_sepp_routing_attempt_fail_current{ocscp_sepp_fqdn="sepp1svc.scpsvc.svc.cluster.local"} - ocscp_metric_sepp_routing_attempt_fail_current{plmn_id="mnc123-mcc100"}

Table 5-94 ocscp_metric_sepp_routing_attempt_fail_current

Field	Details
Description	Set to 1 if inter-plmn requests routing failed towards SEPP.
Type	Gauge
Dimension	- ocscp_nf_end_point (Default value = NA) - ocscp_sepp_fqdn (default value = NA, Contains fqdn of producer) - plmn_id(mnc123-mcc254) - ocscp_authority
Example	- ocscp_metric_sepp_routing_attempt_fail_current{ocscp_nf_type="UDM"} - ocscp_metric_sepp_routing_attempt_fail_current{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_sepp_routing_attempt_fail_current{ocscp_sepp_fqdn="sepp1svc.scpsvc.svc.cluster.local"} - ocscp_metric_sepp_routing_attempt_fail_current{plmn_id="mnc123-mcc100"}

Table 5-95 ocscp_metric_sepp_not_configured_total

Field	Details
Description	The total number of inter-PLMN requests failed because SEPP is not configured for target PLMN received in interPlmnFqdn from 3gpp-Sbi-Target-apiRoot HTTP header or interPlmnFqdn after discovery response.
Type	Counter

Table 5-95 (Cont.) ocscp_metric_sepp_not_configured_total

Field	Details
Dimension	- ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) - plmn_id(mnc123-mcc254) - ocscp_authority
Example	ocscp_metric_sepp_not_configured_total{plmn_id="mnc123-mcc254"}

Table 5-96 ocscp_metric_sepp_not_configured_current

Field	Details
Description	Set to 1 if inter-plmn requests failed because SEPP is not configured for target PLMN received in interPlmnFqdn from 3gpp-Sbi-Target-apiRoot HTTP header or interPlmnFqdn after discovery response.
Type	Gauge
Dimension	- ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) - plmn_id(mnc123-mcc254) - ocscp_authority
Example	ocscp_metric_sepp_not_configured_current{plmn_id="mnc123-mcc254"}

Table 5-97 ocscp_metric_5gsbi_rx_req_total

Field	Details
Description	Indicates the total number of incoming request. This metric can be used to segregate the ingress requests based on scheme, that is, with HTTP or HTTPS. The ocscp_nf_service_type dimension for notifications is "n<nfType>-unknown" or "NA-unknown". Where, <nfType> is any NF name.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_authority - scheme(for example, https) - ocscp_consumer_host
Example	- ocscp_metric_5gsbi_rx_req_total{ocscp_nf_type="PCF"} - ocscp_metric_5gsbi_rx_req_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_metric_5gsbi_rx_req_total{scheme="https"} - ocscp_metric_5gsbi_rx_req_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}

Table 5-98 ocscp_metric_5gsbi_tx_req_total

Field	Details
Description	The total number of requests forwarded by Service Communication Proxy to the upstream cluster. This metric can be used to segregate the egress requests based on the scheme, such as HTTP or HTTPS.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_nf_end_point (Default value = NA) - ocscp_producer_host (default value = NA, Contains fqdn of producer) - ocscp_authority - scheme(e.g., https)
Example	- ocscp_metric_5gsbi_tx_req_total{ocscp_nf_type="PCF"} - ocscp_metric_5gsbi_tx_req_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_metric_5gsbi_tx_req_total{scheme="https"} - ocscp_metric_5gsbi_tx_req_total{ocscp_nf_end_point="NA"} - ocscp_metric_5gsbi_tx_req_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}

Table 5-99 ocscp_metric_5gsbi_tx_res_total

Field	Details
Description	The total number of responses forwarded by SCP with specific HTTP response codes (for example, 201, 503, and so on). This metric can be used to segregate the egress responses based on a scheme, such as HTTP or HTTPS. Note: The ocscp_authority dimension will get pegged only when it is enabled using the value.yaml file. scpAuthorityMetricLabelDisabled: false
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_response_code(e.g., 201, 503, 404, etc.) - ocscp_response_code_class (e.g., 2, 5, etc.) - ocscp_authority - scheme(e.g., https)
Example	- ocscp_metric_5gsbi_tx_res_total{ocscp_nf_type="PCF"} - ocscp_metric_5gsbi_tx_res_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_metric_5gsbi_tx_res_total{scheme="https"} - ocscp_metric_5gsbi_tx_res_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}

Table 5-100 ocscp_metric_5gsbi_rx_res_total

Field	Details
Description	The total number of responses received by SCP with specific HTTP response codes (for example, 201, 503, and so on.) This metric can be used to segregate the ingress responses based on a scheme, such as HTTP or HTTPS.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_nf_end_point (Default value = NA) - ocscp_response_code (e.g., 201, 503, 404, etc.) - ocscp_response_code_class (e.g., 2, 5, etc.) - ocscp_authority - scheme (e.g., https)
Example	- ocscp_metric_5gsbi_rx_res_total{ocscp_nf_type="PCF"} - ocscp_metric_5gsbi_rx_res_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_metric_5gsbi_rx_res_total{scheme="https"} - ocscp_metric_5gsbi_rx_res_total{ocscp_nf_end_point="NA"} - ocscp_metric_5gsbi_rx_res_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}

Table 5-101 ocscp_metric_ssl_certificate_expire

Field	Details
Description	The state of metric becomes 1 when the server or client certificate is about to expire.
Type	Gauge
Dimension	- ocscp_fqdn - certificate_type (for example, 5G_SBI_SERVER_PRIMARY, 5G_SBI_CLIENT_PRIMARY, 5G_SBI_SERVER_SECONDARY, 5G_SBI_CLIENT_SECONDARY, 5G_SBI_TRAFFIC_FEED_PRIMARY, 5G_SBI_TRAFFIC_FEED_SECONDARY)
Example	ocscp_metric_ssl_certificate_expire{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-102 ocscp_metric_scp_cache_service_unreachable_total

Field	Details
Description	Number of times SCP worker is unable to find SCP cache service.
Type	Counter
Dimension	- coherenceCluster - ocscp_fqdn

Table 5-102 (Cont.) ocscp_metric_scp_cache_service_unreachable_total

Field	Details
Example	ocscp_metric_scp_cache_service_unreachable_total{coherenceCluster="scp-coherence-cluster"scp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-103 ocscp_missed_nf_notifications_total

Field	Details
Description	Number of times the notifications are missed.
Type	Counter
Dimension	nfType
Example	ocscp_missed_nf_notifications_total{ocscp_nf_type="UDM"}

Table 5-104 ocscp_notifications_rejected_topologysource_nrf_total

Field	Details
Description	Number of notifications rejected from NRF as topology source.
Type	Counter
Dimension	nfType
Example	ocscp_notifications_rejected_topologysource_nrf_total{ocscp_nf_type="UDM"}

Table 5-105 ocscp_nrf_notifications_requests_total

Field	Details
Description	Number of NRF notifications accepted at notification for further NF profile processing.
Type	nfType
Dimension	Counter
Example	ocscp_nrf_notifications_requests_total{ocscp_nf_type="UDM"}

Table 5-106 ocscp_soothsayer_audit_db_fetch

Field	Details
Description	Indicates the database fetched for audit.
Type	Counter
Dimension	ocscp_soothsayer_audit_db_fetch
Example	ocscp_soothsayer_audit_db_fetch{ocscp_nf_type="UDM"}

Table 5-107 ocsdp_update_topology_source_failure_total

Field	Details
Description	Number of times the topology source information is toggled.
Type	Counter
Dimension	nfType
Example	ocsdp_update_topology_source_failure_total{ocsdp_nf_type="UDM"}

Table 5-108 ocsdp_worker_pod_overload_control_cpu_utilization_warn

Field	Details
Description	Indicates CPU utilization of SCP worker at Warn level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocsdp_worker_pod_overload_control_cpu_utilization_warn{pod_name="ocsdp-scp-worker-6fcc755f9b-5hckw",scp_service="scp-worker"}

Table 5-109 ocsdp_worker_pod_overload_control_cpu_utilization_minor

Field	Details
Description	Indicates CPU utilization of SCP worker at Minor level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocsdp_worker_pod_overload_control_cpu_utilization_minor{pod_name="ocsdp-scp-worker-6fcc755f9b-5hckw",scp_service="scp-worker"}

Table 5-110 ocsdp_worker_pod_overload_control_cpu_utilization_major

Field	Details
Description	Indicates CPU utilization of SCP worker at Major level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocsdp_worker_pod_overload_control_cpu_utilization_major{pod_name="ocsdp-scp-worker-6fcc755f9b-5hckw",scp_service="scp-worker"}

Table 5-111 ocsdp_notifications_suspended_topologysource_nrf_total

Field	Details
Description	Indicates the number of times SUSPEND notifications are received by SCP.

Table 5-111 (Cont.) ocscp_notifications_suspended_topologysource_nrf_total

Field	Details
Type	Counter
Dimension	- pod_name - ocscp_producer_nf_instance_id
Example	ocscp_notifications_suspended_topologysource_nrf_total{status="suspended"}

Table 5-112 ocscp_notifications_profile_deleted_deregistration_total

Field	Details
Description	Indicates the number of times NF profile is removed due to DEREGISTER ED notification.
Type	Counter
Dimension	- event - ocscp_producer_nf_instance_id
Example	ocscp_notifications_profile_deleted_deregistration_total{event="deregistered"}

Table 5-113 ocscp_metric_ar_attempt_fail_total

Field	Details
Description	Indicates the total number of failed alternate routing attempts made using static configuration.
Type	Counter
Dimension	- ocscp_alternate_route_type - ocscp_nf_type - ocscp_nf_service_type - ocscp_fqdn
Example	ocscp_metric_ar_attempt_fail_total{ocscp_alternate_route_type="STATIC_CONFIG"}

Table 5-114 ocscp_nrf_nf_discovery_request_processing_time_total

Field	Details
Description	Indicates the NRF request processing time by the scp-nrfproxy microservice.
Type	Counter
Dimension	- ocscp_producer_nf_type - ocscp_nf_service_type - ocscp_consumer_nf_type - subscriber_info_present - ocscp_nrf_service_type - is_inter_plmn
Example	- ocscp_nrf_nf_discovery_request_processing_time_total{ocscp_producer_nf_type="PCF"} - ocscp_nrf_nf_discovery_request_processing_time_total{ocscp_consumer_nf_type="PCF"}

Table 5-115 ocscp_nrf_nf_discovery_response_processing_time_total

Field	Details
Description	Indicates the NRF response processing time by the scp-nrfproxy microservice.
Type	Counter
Dimension	- ocscp_producer_nf_type - ocscp_nf_service_type - ocscp_consumer_nf_type - subscriber_info_present - is_inter_plmn - ocscp_nrf_service_type
Example	- ocscp_nrf_nf_discovery_response_processing_time_total{ocscp_producer_nf_type="PCF"} - ocscp_nrf_nf_discovery_response_processing_time_total{ocscp_consumer_nf_type="PCF"}

Table 5-116 ocscp_global_egress_rl_bucketkey_not_rate_controlled_total

Field	Details
Description	Indicates when the local SCP is not performing global rate control while other SCP instances in the scp-cache cluster are performing the rate control.
Type	Counter
Dimension	- ocscp_fqdn - ocscp_egress_rl_bucketkey
Example	- ocscp_global_egress_rl_bucketkey_not_rate_controlled_total(bucketKey="egress_udm3svc.scpsvc.svc.cluster.local") - ocscp_global_egress_rl_bucketkey_not_rate_controlled_total(ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local")

Table 5-117 ocscp_global_egress_rl_remote_participant_connectivity_failure

Field	Details
Description	Monitors the remote coherence participant connectivity status.
Type	Gauge
Dimension	- ocscp_fqdn - scp_local_coh_cluster_name - scp_remote_coh_cluster_name - scp_remote_coh_cluster_fqdn - scp_remote_coh_cluster_port - scp_remote_coh_cluster_nf_instance_id

Table 5-117 (Cont.) ocscp_global_egress_rl_remote_participant_connectivity_failure

Field	Details
Example	ocscp_global_egress_rl_remote_participant_connectivity_failure{applicationName="ocscp",microservice="scp-cache",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",scp_local_coh_cluster_name="scp-coherence-cluster",scp_remote_coh_cluster_fqdn="ocscp-scp-cache.fedsvc.svc.cluster.local",scp_remote_coh_cluster_name="scp-coherence-cluster-fedsvc",scp_remote_coh_cluster_port="30001",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",scp_remote_coh_cluster_nf_instance_id="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"}

Table 5-118 ocscp_mediation_http_tx_total

Field	Details
Description	Indicates that the request is forwarded to Mediation. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_mediation_triggerpoint - ocscp_mediation_filtername
Example	ocscp_mediation_http_tx_total(ocscp_mediation_filtername="PCFsmpolicy",ocscp_mediation_triggerpoint="requestIngress")

Table 5-119 ocscp_mediation_http_rx_total

Field	Details
Description	Indicates that the response is received by SCP from Mediation when Mediation is invoked from the request trigger point and producer NF when Mediation is triggered from the response trigger points. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_mediation_triggerpoint - ocscp_mediation_filtername - responseCode - responseCodeClass - headerModified - bodyModified

Table 5-119 (Cont.) ocscp_mediation_http_rx_total

Field	Details
Example	ocscp_mediation_http_rx_total(ocscp_mediation_filtername="PCFsmpolicy",ocscp_mediation_triggerpoint="requestIngress")

Table 5-120 ocscp_mediation_upstream_service_time_ms

Field	Details
Description	Indicates the time taken for Mediation processing.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_mediation_triggerpoint - ocscp_med_upstream_service_time - ocscp_fqdn
Example	ocscp_mediation_upstream_service_time_ms_total(applicationName="ocscp", microservice="scp-worker",ocscp_med_upstream_service_time="128ms",ocscp_mediation_triggerpoint="requestEgress",ocscp_nf_service_type="nsmf-pdusession",ocscp_nf_type="SMF", ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle")

Table 5-121 ocscp_mediation_http_not_reachable

Field	Details
Description	Indicates that the request to Mediation has failed or connection is not established.
Type	Gauge
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_mediation_triggerpoint - ocscp_response_code - ocscp_fqdn
Example	ocscp_mediation_http_not_reachable(applicationName="ocscp",microservice="scp-worker",ocscp_mediation_triggerpoint="requestIngress",ocscp_nf_service_type="npcf-smpolicycontrol",ocscp_nf_type="PCF",ocscp_response_code="503",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle",}

Table 5-122 ocscp_notification_queue_utilization

Field	Details
Description	Indicates Notification queue utilization.
Type	Gauge
Dimension	- queueName - queueCapacity

Table 5-122 (Cont.) ocscp_notification_queue_utilization

Field	Details
Example	- ocscp_notification_queue_utilization{queueName="waitingQueueUDM"} - ocscp_notification_queue_utilization > 0 - ocscp_notification_queue_utilization{queueName="waitingQueueUDM"} > 0

Table 5-123 ocscp_notification_queue_alert

Field	Details
Description	Indicates Notification queue alert.
Type	Gauge
Dimension	- queueName - severity - queueCapacity
Example	- ocscp_notification_queue_alert{queueName="waitingQueueUDM"} - ocscp_notification_queue_alert > 0 - ocscp_notification_queue_alert{queueName="waitingQueueUDM"} > 0

Table 5-124 ocscp_nrfproxy_queue_utilization

Field	Details
Description	Indicates NrfProxy queue utilization.
Type	Gauge
Dimension	- queueName - queueCapacity
Example	- ocscp_nrfproxy_queue_utilization{queueName="scpUpstreamExecutorQueue"} - ocscp_nrfproxy_queue_utilization{queueCapacity="10000"} - ocscp_nrfproxy_queue_utilization > 0

Table 5-125 ocscp_nrfproxy_queue_alert

Field	Details
Description	Indicates NrfProxy queue alert Metrics Pegging Condition: This metric value will either be 0 or 1. Based on the severity value, it will be 1 for high severity, and correspondingly, for other severity values, it will be 0.
Type	Gauge
Dimension	- queueName: Name of the queue (scpDownstreamExecutorQueue, scpUpstreamExecutorQueue) - severity: CRITICAL, MAJOR, MINOR, NORMAL - queueCapacity: The maximum size of queue is 10000

Table 5-125 (Cont.) ocscp_nrfproxy_queue_alert

Field	Details
Example	- ocscp_nrfproxy_queue_alert{queueName="scpDownstreamExecutorQueue"} - ocscp_nrfproxy_queue_alert > 0 - ocscp_nrfproxy_queue_alert{severity="CRITICAL"}

Table 5-126 ocscp_worker_queue_utilization

Field	Details
Description	Indicates Worker queue utilization.
Type	Gauge
Dimension	- queueName: name of the queue (scpDownstreamExecutorQueue, scpUpstreamExecutorQueue, scpNrfProxyDownstreamExecutorQueue, scpClientExecutorQueue, scpUpdateSSLCertsQueue, scpMediationDownstreamExecutorQueue, scpReconfigureEgressRLExecutorQueue) - queueCapacity: The maximum size of queue is 10000
Example	Below example will return worker queue utilization metric for scpClientExecutorQueue: - ocscp_worker_queue_utilization{queueName="scpClientExecutorQueue"} Below example will returns all worker queues utilization metric with queueCapacity: - ocscp_worker_queue_utilization{queueCapacity="10000"} Below example will return all worker queue utilization metrics with utilization greater than 0: - ocscp_worker_queue_utilization > 0

Table 5-127 ocscp_worker_queue_alert

Field	Details
Description	Indicates Worker queue alert.
Type	Gauge
Dimension	- queueName - severity - queueCapacity
Example	- ocscp_worker_queue_alert{queueName="scpUpdateSSLCertsQueue"} - ocscp_worker_queue_alert > 0 - ocscp_worker_queue_alert{severity="MAJOR"}

Table 5-128 ocscp_metric_nf_lci_rx_total

Field	Details
Description	Indicates the number of messages received with NF's LCI header. Here, "ocscp_peer_nf_instance_id" denotes the instance ID of the producer from which it has received the LCI header.
Type	Counter
Dimension	- ocscp_fqdn - ocscp_peer_nf_instance_id
Example	- ocscp_metric_nf_lci_rx_total{ocscp_fqdn= "ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_nf_lci_rx_total{ocscp_peer_nf_instance_id="instance-id-example"}

Table 5-129 ocscp_metric_nf_lci_tx_total

Field	Details
Description	Indicates the number of messages forwarded with NF's LCI header. Here, "ocscp_peer_nf_instance_id" denotes the instance ID of the NF where it is sending LCI. When sending a request to the producer, it represents the producer instance ID, while when sending a response to the consumer, it represents the consumer instance ID
Type	Counter
Dimension	- ocscp_fqdn - ocscp_peer_nf_instance_id
Example	- ocscp_metric_nf_lci_tx_total{ocscp_fqdn= "ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_nf_lci_tx_total{ocscp_peer_nf_instance_id="instance-id-example"}

Table 5-130 ocscp_metric_scp_lci_tx_total

Field	Details
Description	Indicates the number of messages forwarded with SCP's LCI header. Here, "ocscp_peer_nf_instance_id" denotes the instance ID of the producer to which SCP sends this request with LCI header.
Type	Counter
Dimension	- ocscp_fqdn - ocscp_peer_nf_instance_id
Example	- ocscp_metric_scp_lci_tx_total{ocscp_fqdn= "ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_scp_lci_tx_total{ocscp_peer_nf_instance_id="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"}

Table 5-131 ocscp_metric_nf_lci_cache_update_total

Field	Details
Description	Indicates the number of cache updates done by peer load change.
Type	Counter
Dimension	ocscp_fqdn
Example	ocscp_metric_nf_lci_cache_update_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-132 ocscp_scp_load

Field	Details
Description	Metric to record SCP load value.
Type	Gauge
Dimension	- ocscp_fqdn - ocscp_scp_instance_id
Example	- ocscp_nf_load{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_nf_load{ocscp_scp_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}

Table 5-133 ocscp_nf_load

Field	Details
Description	Records the peer NF load value.
Type	Gauge
Dimension	- ocscp_fqdn - peer_info - ocscp_scope - ocscp_producer_service_instance_id
Example	- ocscp_nf_load{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_nf_load{peer_info="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"} - ocscp_nf_load{ocscp_scope="nf-instance"} - ocscp_nf_load{ocscp_producer_service_instance_id="fe137ab7-740a-46ee-aa5c-951806d77b02"}

Table 5-134 ocscp_modeld_cache_key_size

Field	Details
Description	Metric to indicate modelD cache Key size in worker and nrfproxy.
Type	Gauge
Dimension	- scp_service - ocscp_fqdn

Table 5-134 (Cont.) ocscp_modeld_cache_key_size

Field	Details
Example	- ocscp_modeld_cache_key_size{scp_service="scp-nrfproxy"} - ocscp_modeld_cache_key_size{scp_service="scp-worker"}

Table 5-135 ocscp_cache_egress_grl_local_worker_token_consumption_total

Field	Details
Description	The local SCP worker token consumption in global egress rate limit.
Type	Counter
Dimension	- bucketKey - ocscp_fqdn
Example	- ocscp_cache_egress_grl_local_worker_token_consumption_total{bucketKey="egress_pcf1svc.ny-ocscp-01.svc.thrust2"} - ocscp_cache_egress_grl_local_worker_token_consumption_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}

Table 5-136 ocscp_cache_egress_grl_remote_worker_token_consumption_total

Field	Details
Description	The remote SCP worker token consumption in global egress rate limit.
Type	Counter
Dimension	- bucketKey - ocscp_fqdn
Example	- ocscp_cache_egress_grl_remote_worker_token_consumption_total{bucketKey="6faf1bbc-6e4a-4a54-a507-a14ef8e1bc5d_egress_pcf1svc.ny-ocscp-01.svc.thrust2"} - ocscp_cache_egress_grl_remote_worker_token_consumption_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}

Table 5-137 ocscp_cache_egress_grl_local_worker_msg_consumption_percentage_total

Field	Details
Description	The local SCP worker token consume percentage in global egress rate limit.
Type	Counter
Dimension	- bucketKey - ocscp_fqdn

Table 5-137 (Cont.) ocscp_cache_egress_grl_local_worker_msg_consumption_percentage_total

Field	Details
Example	- ocscp_cache_egress_grl_local_worker_msg_consumption_percentage_total{bucketKey="egress_pcf1svc.ny-ocscp-01.svc.thrust2"} - ocscp_cache_egress_grl_local_worker_msg_consumption_percentage_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}

Table 5-138 ocscp_cache_egress_grl_controller_token_consumption_total

Field	Details
Description	The number of tokens consumed by the global rate controller to adjust token availability for cache services.
Type	Counter
Dimension	- bucketKey - ocscp_fqdn
Example	- ocscp_cache_egress_grl_controller_token_consumption_total{bucketKey="egress_pcf1svc.ny-ocscp-01.svc.thrust2"} - ocscp_cache_egress_grl_controller_token_consumption_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}

Table 5-139 ocscp_metric_svc_unreachable

Field	Details
Description	This metric is pegged whenever there is a communication failure between microservices. Once the communication between the source and the destination is reestablished, this metric is cleared.
Type	Gauge
Dimension	- source: indicates the source svc, such as scp-worker, scpc-configuration, and so on. - destination: indicates the destination svc, such as scpc-notification, scp-nrfproxy, and so on. Possible list of values: - source: scp-worker, scp-nrfproxy, scpc-audit, scpc-alternate-resolution, scpc-configuration, scpc-notification, scpc-subscription - destination: scp-worker, scp-nrfproxy, scpc-audit, scpc-alternate-resolution, scpc-configuration, scpc-notification, scpc-subscription, scp-mediation, scp-cache
Example	- ocscp_metric_svc_unreachable{source="scp-worker", destination="scpc-notification"} - ocscp_metric_svc_unreachable{source="scpc-audit", destination="scp-worker"} - ocscp_metric_svc_unreachable{source="scpc-subscription", destination="scp-worker"}

Table 5-140 ocscp_metric_nf_unhealthy_total

Field	Details
Description	Number of times a producer NF is marked unhealthy.
Type	Counter
Dimension	- ocscp_producer_nf_instance_id - ocscp_nf_end_point - ocscp_producer_host - ocscp_nf_service_type - ocscp_locality - ocscp_fqdn
Example	- ocscp_metric_nf_unhealthy_total{ocscp_producer_nf_instance_id="123-ffb"} - ocscp_metric_nf_unhealthy_total{ocscp_nf_end_point="10.23.34.54:8080"} - ocscp_metric_nf_unhealthy_total{ocscp_producer_host="udm1.svc.cluster.local.com"} - ocscp_metric_nf_unhealthy_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_nf_unhealthy_total{ocscp_locality="Loc7"} - ocscp_metric_nf_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-141 ocscp_metric_req_nf_unhealthy_total

Field	Details
Description	Number of message requests not routed to the selected producer NF because it is marked unhealthy.
Type	Counter
Dimension	- ocscp_producer_nf_instance_id - ocscp_nf_end_point - ocscp_producer_host - ocscp_nf_service_type - ocscp_locality - ocscp_fqdn
Example	- ocscp_metric_req_nf_unhealthy_total{ocscp_producer_nf_instance_id="123-44b"} - ocscp_metric_req_nf_unhealthy_total{ocscp_nf_end_point="10.23.34.54:8080"} - ocscp_metric_req_nf_unhealthy_total{ocscp_producer_host="udm1.svc.cluster.local.com"} - ocscp_metric_req_nf_unhealthy_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_req_nf_unhealthy_total{ocscp_locality="Loc7"} - ocscp_metric_req_nf_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-142 ocscp_metric_req_peer_scp_unhealthy_total

Field	Details
Description	Number of message requests not routed to the selected peer SCP because it is marked unhealthy.
Type	Counter
Dimension	- ocscp_nf_service_type - ocscp_peer_scp_instance_id - ocscp_peer_scp_fqdn - ocscp_fqdn - ocscp_locality
Example	- ocscp_metric_req_peer_scp_unhealthy_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_req_peer_scp_unhealthy_total{ocscp_peer_scp_instance_id="123-23b"} - ocscp_metric_req_peer_scp_unhealthy_total{ocscp_peer_scp_fqdn="scp51svc.cluster.local.com"} - ocscp_metric_req_peer_scp_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_req_peer_scp_unhealthy_total{ocscp_locality="Loc7"}

Table 5-143 ocscp_metric_sepp_unhealthy_total

Field	Details
Description	Number of times SEPP is marked unhealthy.
Type	Counter
Dimension	- ocscp_sepp_intance_id - ocscp_sepp_end_point - ocscp_sepp_fqdn - ocscp_locality - ocscp_fqdn
Example	- ocscp_metric_sepp_unhealthy_total{ocscp_sepp_intance_id="123-55b"} - ocscp_metric_sepp_unhealthy_total{ocscp_sepp_end_point="10.23.34.54:8080"} - ocscp_metric_sepp_unhealthy_total{ocscp_sepp_fqdn="sepp1.svc.cluster.local.com"} - ocscp_metric_sepp_unhealthy_total{ocscp_locality="Loc7"} - ocscp_metric_sepp_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-144 ocscp_metric_req_sepp_unhealthy_total

Field	Details
Description	Number of message requests not routed to the selected SEPP because SEPP is marked unhealthy.
Type	Counter

Table 5-144 (Cont.) ocscp_metric_req_sepp_unhealthy_total

Field	Details
Dimension	- ocscp_nf_service_type - ocscp_sepp_intance_id - ocscp_sepp_end_point - ocscp_sepp_fqdn - ocscp_locality - ocscp_fqdn
Example	- ocscp_metric_req_sepp_unhealthy_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_metric_req_sepp_unhealthy_total{ocscp_sepp_intance_id="123-455b"} - ocscp_metric_req_sepp_unhealthy_total{ocscp_sepp_end_point="10.23.34.54:8080"} - ocscp_metric_req_sepp_unhealthy_total{ocscp_sepp_fqdn="sepp1.svc.cluster.local.com"} - ocscp_metric_req_sepp_unhealthy_total{ocscp_locality="Loc7"} - ocscp_metric_req_sepp_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-145 ocscp_metric_nf_set_unhealthy

Field	Details
Description	Indicates whether all the producer NFs in the NF SET are unhealthy.
Type	Gauge
Dimension	ocscp_nf_setid
Example	ocscp_metric_nf_set_unhealthy{ocscp_nf_setid="123-445-363"}

Table 5-146 ocscp_sepp_unhealthy

Field	Details
Description	Indicate whether all the SEPP instances are unhealthy.
Type	Gauge
Dimension	- ocscp_sepp_instance_id - ocscp_sepp_fqdn - ocscp_locality
Example	- ocscp_sepp_unhealthy{ocscp_sepp_instance_id="123-455b"} - ocscp_sepp_unhealthy{ocscp_sepp_fqdn="sepp1.svc.cluster.local.com"} - ocscp_sepp_unhealthy{ocscp_locality="Loc7"}

Table 5-147 ocscp_metric_trafficfeed_not_attempted_total

Field	Details
Description	Number of messages selected for traffic feed based on the trigger point configuration filter criteria but not attempted to send because of some condition.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on.) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_trafficfeed_triggerpoint (for example, requestIngress, requestEgress, responseIngress, responseEgress) - ocscp_cause (for example, CRITICAL Pod Overload, Incorrect Data Director Information, Send Failed) - kafka_partition_id - kafka_broker_id - ocscp_fqdn
Example	ocscp_metric_trafficfeed_not_attempted_total{ocscp_nf_type="UDM",ocscp_cause="Incorrect Data Director Information",ocscp_nf_service_type="nudm-uecm",ocscp_trafficfeed_triggerpoint="requestEgress",kafka_partition_id="NA",kafka_broker_id="NA"}

Table 5-148 ocscp_metric_trafficfeed_failed_total

Field	Details
Description	Number of messages failed to send to traffic feed.
Type	Counter
Dimension	- ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_trafficfeed_triggerpoint (for example, requestIngress, requestEgress, responseIngress, responseEgress.) - ocscp_cause(for example, CRITICAL Pod Overload, Incorrect Data Director Information, Send Failed.) - kafka_partition_id - kafka_broker_id - ocscp_fqdn
Example	ocscp_metric_trafficfeed_failed_total{ocscp_cause="Incorrect Data Director Information",ocscp_nf_service_type="nudm-uecm",ocscp_trafficfeed_triggerpoint="requestEgress"}

Table 5-149 ocscp_metric_trafficfeed_attempted_total

Field	Details
Description	Number of messages sent to traffic feed.
Type	Counter

Table 5-149 (Cont.) ocscp_metric_trafficfeed_attempted_total

Field	Details
Dimension	- ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) - ocscp_trafficfeed_triggerpoint (for example, requestIngress, requestEgress, responseIngress, responseEgress.) - kafka_partition_id - kafka_broker_id - ocscp_fqdn
Example	ocscp_metric_trafficfeed_total{ocscp_nf_service_type="naus-f-auth",ocscp_trafficfeed_triggerpoint="requestEgress"}

Table 5-150 ocscp_worker_fqdn_resolution_total

Field	Details
Description	Number of messages for which fqdn is resolved by DNS or from nfProfile.
Type	Counter
Dimension	- ocscp_nf_service_type - ocscp_fqdn_resolution - ocscp_fqdn
Example	- ocscp_worker_fqdn_resolution_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_fqdn_resolution_total{ocscp_fqdn_resolution="dns"} - ocscp_worker_fqdn_resolution_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}

Table 5-151 ocscp_worker_interplmn_fqdn_resolution_total

Field	Details
Description	Number of messages for which inter-plmn fqdn is resolved by DNS or from nfProfile.
Type	Counter
Dimension	- ocscp_nf_service_type - ocscp_fqdn_resolution - ocscp_fqdn
Example	- ocscp_worker_interplmn_fqdn_resolution_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_interplmn_fqdn_resolution_total{ocscp_fqdn_resolution="dns"} - ocscp_worker_interplmn_fqdn_resolution_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}

Table 5-152 ocscp_worker_http_req_host_type_total

Field	Details
Description	Number of messages with http host as IP or FQDN. Note: When a message request is implicit or of default notification type, the value of the ocscp_worker_http_req_host_type_total metric is updated based on the host of the message request, with value IP or FQDN that is independent of the configuration of the Egress Host Preference feature. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimension	- ocscp_consumer_host - ocscp_consumer_nf_instance_id - ocscp_consumer_nf_type - ocscp_nf_service_type - host_type - ocscp_fqdn Note: These dimensions are available based on the availability of the User-Agent header in incoming message requests. SCP should be able to decode that particular format only if the User-Agent header is available in certain allowed configurable formats.
Example	- ocscp_worker_http_req_host_type_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_http_req_host_type_total{host_type="fqdn"} - ocscp_worker_http_req_host_type_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}

Table 5-153 ocscp_worker_cpu_pod_overload_control_status

Field	Details
Description	Indicates CPU utilization of SCP worker at any level.
Type	Gauge
Dimension	- pod_name - scp_service - ocscp_threshold_level
Example	- ocscp_worker_cpu_pod_overload_control_status{pod_name="ocscp-scp-worker-647595788d-7tbx9",scp_service="scp-worker",ocscp_threshold_level="major"} - ocscp_worker_cpu_pod_overload_control_status{pod_name="ocscp-scp-worker-647595788d-7tbx9",scp_service="scp-worker"}

Table 5-154 ocscp_worker_pod_overload_control_pendingTrans_utilization_minor

Field	Details
Description	Indicates pending transaction utilization of SCP worker at minor level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocscp_worker_pod_overload_control_pendingTrans_utilization_minor{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}

Table 5-155 ocscp_worker_pod_overload_control_pendingTrans_utilization_major

Field	Details
Description	Indicates pending transaction utilization of SCP worker at major level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocscp_worker_pod_overload_control_pendingTrans_utilization_major{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}

Table 5-156 ocscp_worker_pod_overload_control_pendingTrans_utilization_critical

Field	Details
Description	Indicates pending transaction utilization of SCP worker at critical level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocscp_worker_pod_overload_control_pendingTrans_utilization_critical{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}

Table 5-157 ocscp_worker_pod_overload_control_pendingTrans_utilization_warn

Field	Details
Description	Indicates pending transaction utilization of SCP worker at warn level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocscp_worker_pod_overload_control_pendingTrans_utilization_warn{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}

Table 5-158 ocscp_worker_pendingTrans_pod_overload_control_status

Field	Details
Description	Indicates pending transaction utilization of SCP worker at any level.
Type	Gauge
Dimension	- pod_name - scp_service - ocscp_threshold_level
Example	- ocscp_worker_pendingTrans_pod_overload_control_status{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} - ocscp_worker_pendingTrans_pod_overload_control_status{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker",ocscp_threshold_level="major"}

Table 5-159 ocscp_worker_pod_overload_control_resource_utilization_minor

Field	Details
Description	Indicates overload control resource utilization of SCP worker at minor level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocscp_worker_pod_overload_control_resource_utilization_minor{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}

Table 5-160 ocscp_worker_pod_overload_control_resource_utilization_major

Field	Details
Description	Indicates overload control resource utilization of SCP worker at major level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocscp_worker_pod_overload_control_resource_utilization_major{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}

Table 5-161 ocscp_worker_pod_overload_control_resource_utilization_critical

Field	Details
Description	Indicates overload control resource utilization of SCP worker at critical level.
Type	Gauge
Dimension	- pod_name - scp_service

Table 5-161 (Cont.) ocscp_worker_pod_overload_control_resource_utilization_critical

Field	Details
Example	ocscp_worker_pod_overload_control_resource_utilization_critical{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}

Table 5-162 ocscp_worker_pod_overload_control_resource_utilization_warn

Field	Details
Description	Indicates overload control resource utilization of SCP worker at warn level.
Type	Gauge
Dimension	- pod_name - scp_service
Example	ocscp_worker_pod_overload_control_resource_utilization_warn{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"}

Table 5-163 ocscp_worker_pod_overload_control_status

Field	Details
Description	Indicates overload control resource utilization of SCP worker at any level.
Type	Gauge
Dimension	- pod_name - scp_service - ocscp_threshold_level
Example	- ocscp_worker_pod_overload_control_status{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker"} - ocscp_worker_pod_overload_control_status{pod_name="ocscp-scp-worker-668c75fbc8-kptfv",scp_service="scp-worker",ocscp_threshold_level="major"}

Table 5-164 ocscp_worker_cca_validation_performed_total

Field	Details
Description	Indicates the number of requests on which CCA validation is performed.
Type	Counter
Dimension	ocscp_fqdn
Example	ocscp_worker_cca_validation_performed_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}

Table 5-165 ocscp_worker_cca_validation_failed_total

Field	Details
Description	Indicates the number of requests that failed CCA validation.
Type	Counter
Dimension	- ocscp_fqdn - cca_consumer_nflInstanceId (not_available in case header is not present) - san_consumer_nflInstanceId - validation_type (subject/headerpresence)
Example	- ocscp_worker_cca_validation_failed_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"} - ocscp_worker_cca_validation_failed_total{cca_consumer_nflInstanceId="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"} - ocscp_worker_cca_validation_failed_total{san_consumer_nflInstanceId="2faf1bbc-6e4a-4454-a507-a14ef8e1bc22"} - ocscp_worker_cca_validation_failed_total{validation_type="headerpresence"}

Table 5-166 ocscp_worker_cca_validation_feature_enabled_without_https

Field	Details
Description	The CCA header validation feature is enabled without SCP HTTPS deployment.
Type	Gauge
Dimension	ocscp_fqdn
Example	ocscp_worker_cca_validation_feature_enabled_without_https{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"}

Table 5-167 ocscp_cache_queue_alert

Field	Details
Description	Indicates the cache queue alert. Metrics Pegging Condition: This metric value is either 0 or 1. Based on severity, the value will be 1 for that severity, and correspondingly, for other severities, the value will be 0.
Type	Gauge
Dimension	- queueName : name of the queue (scpCacheExecutorQueue, accessTokenAppEvExecutorQueue, accessTokenCohEvExecutorQueue) - queueCapacity : The maximum size of queue is 30000 for scpCacheExecutorQueue and for others it 10000 - severity: CRITICAL, MAJOR, MINOR, NORMAL

Table 5-167 (Cont.) ocscp_cache_queue_alert

Field	Details
Example	- The following example returns the cache queue alert metric for scpCacheExecutorQueue; for severity one instance will be 1, and all others will be either 0 or not pegged: - ocscp_cache_queue_alert{queueName="scpUpdateSSLCertsQueue"} - The following example returns all cache queue alert metrics with a value of 1: - ocscp_cache_queue_alert> 0 - The following example returns the cache queue alert metric for severity MAJOR: - ocscp_cache_queue_alert{severity="MAJOR"}

Table 5-168 ocscp_load_manager_queue_utilization

Field	Details
Description	Indicates the load manager queue utilization. Metrics Pegging Condition: This metric value shows the current utilisation of the queue.
Type	Gauge
Dimension	- queueName : name of the queue (sutLciCohEvExecutorQueue, sutLciAppEvExecutorQueue, peerLciCohEvExecutorQueue, peerLciAppEvExecutorQueue, loadCohEvExecutorQueue, loadAppEvExecutorQueue) - queueCapacity : 10000
Example	- The following example returns the load manager queue utilization metric for sutLciCohEvExecutorQueue: - ocscp_load_manager_queue_utilization{queueName="sutLciCohEvExecutorQueue"} - The following example returns all load manager queues utilization metric with queueCapacity: - ocscp_load_manager_queue_utilization{queueCapacity="10000"} - The following example returns all load manager queue utilization metrics with utilization greater than 0: - ocscp_load_manager_queue_utilization> 0

Table 5-169 ocscp_load_manager_queue_alert

Field	Details
Description	Indicates the load manager queue alert. Metrics Pegging Condition: This metric value is either 0 or 1. Based on severity, the value will be 1 for that severity, and correspondingly, for other severities, the value will be 0.
Type	Gauge

Table 5-169 (Cont.) ocscp_load_manager_queue_alert

Field	Details
Dimension	- queueName : name of the queue (sutLciCohEvExecutorQueue, sutLciAppEvExecutorQueue, peerLciCohEvExecutorQueue, peerLciAppEvExecutorQueue, loadCohEvExecutorQueue, loadAppEvExecutorQueue) - queueCapacity : 10000 - severity: CRITICAL, MAJOR, MINOR, NORMAL
Example	- The following example returns the load manager queue alert metric for sutLciCohEvExecutorQueue; for severity one instance will be 1, and all others will be either 0 or not pegged: - ocscp_load_manager_queue_alert{queueName="sutLciCohEvExecutorQueue"} - The following example returns all load manager queue alert metrics with a value of 1: - ocscp_load_manager_queue_alert > 0 - The following example returns the load manager queue alert metric for severity MAJOR: - ocscp_load_manager_queue_alert{severity="MAJOR"}

Table 5-170 ocscp_global_egress_rl_remote_participant_is_duplicate

Field	Details
Description	This metric keeps track of duplicate remote coherence participants.
Type	Gauge
Dimension	- ocscp_fqdn - scp_nf_instance_id - scp_local_coh_cluster_name - scp_remote_coh_cluster_name - scp_remote_coh_cluster_nf_instance_id - scp_remote_coh_cluster_fqdn - scp_remote_coh_cluster_port

Table 5-170 (Cont.) ocscp_global_egress_rl_remote_participant_is_duplicate

Field	Details
Example	<pre>ocscp_global_egress_rl_remote_participant_is_duplicate{ap p="ocscp-scp-cache", app_kubernetes_io_component="microService", app_kubernetes_io_instance="ocscp", app_kubernetes_io_managed_by="Helm", app_kubernetes_io_name="scp-cache", app_kubernetes_io_part_of="ocscp", app_kubernetes_io_version="<SCP release version>", coherenceCluster="scp-coherence-cluster", helm_sh_chart="scp-cache-26.1.201-beta.22", instance="192.168.140.194:8091", job="kubernetes-pods", microservice="scp-cache", namespace="scpsvc", pod="ocscp-scp-cache-dc9b4775b-vhmtx", pod_template_hash="dc9b4775b", ocscp_fqdn="ocscp-scp- worker.scpsvc.svc.cluster.local", scp_local_coh_cluster_name="scp-coherence-cluster", scp_nf_instance_id="6faf1bbc-6e4a-4454-a507- a14ef8e1bc5e", scp_remote_coh_cluster_fqdn="ocats-scp- ocats-scpglbratelimitstub.scpsvc.svc.cluster.local", scp_remote_coh_cluster_name="scpstub-coherence- cluster", scp_remote_coh_cluster_nf_instance_id="6faf1bbc-6e4a-44 54-a507-a14ef8e1bc5e", scp_remote_coh_cluster_port="30001", vendor="oracle"}</pre>

Table 5-171 ocscp_worker_health_check_rx_req_total

Field	Details
Description	Number of health check requests received by SCP
Type	Counter
Dimension	- pod_name - ocscp_fqdn - ocscp_nf_instance_id - ocscp_consumer_host - ocscp_consumer_nf_instance_id - ocscp_consumer_nf_type - ocscp_consumer_nf_unique_id
Example	- ocscp_worker_health_check_rx_req_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"} - ocscp_worker_health_check_rx_req_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"} - ocscp_worker_health_check_rx_req_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_health_check_rx_req_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"} - ocscp_worker_health_check_rx_req_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_health_check_rx_req_total{ocscp_consumer_nf_type="SMF"} - ocscp_worker_health_check_rx_req_total{ocscp_consumer_nf_unique_id="SE1SMSF1"}

Table 5-172 ocscp_worker_health_check_success_res_total

Field	Details
Description	Number of success responses sent by SCP in response to the health check status query
Type	Counter
Dimension	- pod_name - ocscp_fqdn - ocscp_nf_instance_id - ocscp_consumer_host - ocscp_consumer_nf_instance_id - ocscp_consumer_nf_type - ocscp_consumer_nf_unique_id - successRspType
Example	- ocscp_worker_health_check_success_res_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"} - ocscp_worker_health_check_success_res_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"} - ocscp_worker_health_check_success_res_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_health_check_success_res_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"} - ocscp_worker_health_check_success_res_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_health_check_success_res_total{ocscp_consumer_nf_type="SMF"} - ocscp_worker_health_check_success_res_total{ocscp_consumer_nf_unique_id="SE1SMSF1"} - ocscp_worker_health_check_success_res_total{successRspType="200"}

Table 5-173 ocscp_worker_health_check_error_res_total

Field	Details
Description	Number of error responses sent by SCP in response to the health check status query
Type	Counter
Dimension	- pod_name - ocscp_fqdn - ocscp_nf_instance_id - ocscp_consumer_host - ocscp_consumer_nf_instance_id - ocscp_consumer_nf_type - ocscp_consumer_nf_unique_id - status - cause - detail - title

Table 5-173 (Cont.) ocscp_worker_health_check_error_res_total

Field	Details
Example	- ocscp_worker_health_check_error_res_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"} - ocscp_worker_health_check_error_res_total{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"} - ocscp_worker_health_check_error_res_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_health_check_error_res_total{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"} - ocscp_worker_health_check_error_res_total{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_health_check_error_res_total{ocscp_consumer_nf_type="SMF"} - ocscp_worker_health_check_error_res_total{cause="NF_CONGESTION_RISK"} - ocscp_worker_health_check_error_res_total{detail="NF service is overloaded/congested"} - ocscp_worker_health_check_error_res_total{status="503"} - ocscp_worker_health_check_error_res_total{title="NF service is overloaded/congested"}

Table 5-174 ocscp_interscp_health_check_status_success_total

Field	Details
Description	Number of health check success status of peer SCP based on Outlier Detection and Health Check features
Type	Counter
Dimension	- interScpHost - pod_name - ocscp_nf_instance_id - ocscp_fqdn
Example	- ocscp_interscp_health_check_status_success_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"} - ocscp_interscp_health_check_status_success_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_interscp_health_check_status_success_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"} - ocscp_interscp_health_check_status_success_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-175 ocscp_interscp_health_check_status_failure_total

Field	Details
Description	Number of health check failure status of peer SCP based on Outlier Detection and Health check features
Type	Counter

Table 5-175 (Cont.) ocscp_interscp_health_check_status_failure_total

Field	Details
Dimension	• interScpHost • pod_name • ocscp_nf_instance_id • ocscp_fqdn
Example	• ocscp_interscp_health_check_status_failure_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"} • ocscp_interscp_health_check_status_failure_total{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} • ocscp_interscp_health_check_status_failure_total{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"} • ocscp_interscp_health_check_status_failure_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-176 ocscp_health_check_status_failed

Field	Details
Description	SCP health check status. The value can be either 0 or 1. 0 indicates SCP health check status is successful. 1 indicates SCP health check status has failed.
Type	Gauge
Dimension	• pod_name • ocscp_fqdn • ocscp_nf_instance_id • ocscp_consumer_host • ocscp_consumer_nf_instance_id • ocscp_consumer_nf_type • ocscp_consumer_nf_unique_id • status • cause • detail • title

Table 5-176 (Cont.) ocscp_health_check_status_failed

Field	Details
Example	- ocscp_health_check_status_failed{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"} - ocscp_health_check_status_failed{ocscp_fqdn="ocscp-scp-worker.ny-ocscp-01.svc.thrust2"} - ocscp_health_check_status_failed{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_health_check_status_failed{ocscp_consumer_host="smf1.scpsvc.svc.cluster.local"} - ocscp_health_check_status_failed{ocscp_consumer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_health_check_status_failed{ocscp_consumer_nf_type="SMF"} - ocscp_health_check_status_failed{cause="NF_CONGESTION_RISK"} - ocscp_health_check_status_failed{detail="NF service is overloaded/congested"} - ocscp_health_check_status_failed{status="503"} - ocscp_health_check_status_failed{title="NF service is overloaded/congested"}

Table 5-177 ocscp_interscp_health_check_status_failed

Field	Details
Description	Inter-SCP health check status based on Outlier Detection and Health Check features The value can be either 0 or 1. 0 indicates inter-SCP health check status is successful. 1 indicates inter-SCP health check status has failed.
Type	Gauge
Dimension	- interScpHost - pod_name - ocscp_nf_instance_id - ocscp_fqdn
Example	- ocscp_interscp_health_check_status_failure_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"} - ocscp_interscp_health_check_status_failed{ocscp_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_interscp_health_check_status_failed{pod_name="ocscp-scp-worker-6dbf7ff8b6-g284z"} - ocscp_interscp_health_check_status_failed{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-178 ocscp_oauth_access_token_cache_match_total

Field	Details
Description	Number of times requests fetched by access token from cache in SCP-nrfProxy-oauth
Type	Counter

Table 5-178 (Cont.) ocscp_oauth_access_token_cache_match_total

Field	Details
Dimension	ocscp_fqdn
Example	-

Table 5-179 ocscp_worker_access_token_forwarded_in_tx_res_total

Field	Details
Description	Number of responses in the 3gpp-Sbi-Access-Token header
Type	Counter
Dimension	ocscp_fqdn
Example	-

Table 5-180 ocscp_worker_access_token_forwarded_in_tx_req_total

Field	Details
Description	Number of requests in the 3gpp-Sbi-Access-Token header
Type	Counter
Dimension	ocscp_fqdn
Example	-

Table 5-181 ocscp_worker_access_token_cache_match_total

Field	Details
Description	Number of times requests fetched access token from cache in SCP-Worker
Type	Counter
Dimension	ocscp_fqdn
Example	-

Table 5-182 ocscp_nrf_oauth_error_counts_total

Field	Details
Description	Error responses received from NRF
Type	Counter
Dimension	- ocscp_sub - ocscp_aud
Example	-

Table 5-183 ocscp_oauth_access_token_tx_rsp_total

Field	Details
Description	Responses from SCP-nrfProxy-oauth to SCP-Worker.
Type	Counter

Table 5-183 (Cont.) ocscp_oauth_access_token_tx_rsp_total

Field	Details
Dimension	- ocscp_fqdn - ocscp_response_code - requester_nfType - target_nfType
Example	-

Table 5-184 ocscp_oauth_access_token_rx_res_total

Field	Details
Description	Responses from NRF to SCP-nrfProxy-oauth through SCP-Worker.
Type	Counter
Dimension	- ocscp_fqdn - ocscp_response_code - requester_nfType - target_nfType
Example	-

Table 5-185 ocscp_oauth_access_token_tx_req_total

Field	Details
Description	Requests generated by SCP-nrfProxy-oauth toward NRF through SCP-Worker.
Type	Counter
Dimension	- ocscp_fqdn - requester_nfType - target_nfType
Example	-

Table 5-186 ocscp_oauth_access_token_rx_req_total

Field	Details
Description	Requests received in the SCP-nrfProxy-oauth from SCP-Worker.
Type	Counter
Dimension	ocscp_fqdn
Example	-

Table 5-187 ocscp_worker_access_token_rx_res_total

Field	Details
Description	Access token response from SCP-nrfProxy-oauth to SCP-Worker.
Type	Counter

Table 5-187 (Cont.) ocscp_worker_access_token_rx_res_total

Field	Details
Dimension	- ocscp_fqdn - ocscp_nf_type - ocscp_nf_service_type - ocscp_consumer_nf_type - ocscp_response_code - ocscp_response_code_class
Example	ocscp_worker_access_token_rx_res_total{ocscp_consumer_nf_type="AMF",ocscp_nf_service_type="nsmf-pdusession",ocscp_nf_type="SMF",ocscp_response_code="200",ocscp_response_code_class="2",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-188 ocscp_worker_access_token_tx_req_total

Field	Details
Description	Access token request from SCP-Worker to SCP-nrfProxy-oauth.
Type	Counter
Dimension	- ocscp_fqdn - ocscp_nf_type - ocscp_nf_service_type - ocscp_consumer_nf_type
Example	ocscp_worker_access_token_tx_req_total{ocscp_consumer_nf_type="AMF",ocscp_nf_service_type="nsmf-pdusession",ocscp_nf_type="SMF",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-189 ocscp_audit_interscp_health_check_tx_req_total

Field	Details
Description	Number of inter-SCP health check requests triggered by SCPC-Audit to SCP-Worker
Type	Counter
Dimension	- interScpHost - ocscp_fqdn
Example	- ocscp_audit_interscp_health_check_tx_req_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"} - ocscp_audit_interscp_health_check_tx_req_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-190 ocscp_audit_interscp_health_check_rx_res_total

Field	Details
Description	Number of inter-SCP health check responses received by SCPC-Audit from SCP-Worker
Type	Counter

Table 5-190 (Cont.) ocscp_audit_interscp_health_check_rx_res_total

Field	Details
Dimension	- interScpHost - ocscp_fqdn - responseCode
Example	- ocscp_audit_interscp_health_check_rx_res_total{interScpHost="scp51svc.scpsvc.svc.cluster.local"} - ocscp_audit_interscp_health_check_rx_res_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_audit_interscp_health_check_rx_res_total{responseCode="200"}

Table 5-191 ocscp_notification_lock_operation_time

Field	Details
Description	Indicates the time taken to acquire and release the lock
Type	Counter
Dimension	- nfInstanceId: NfInstanceId of the notification for which the lock operation is performed - lockEvent: lock event (Released or Acquire) - timeInMs: time taken by the lock event
Example	- ocscp_notification_lock_operation_time{namespace="ocscp"} - ocscp_notification_lock_operation_time{lockEvent="ACQUIRED_LOCK"} - ocscp_notification_lock_operation_time{lockEvent="RELEASED_LOCK"}

Table 5-192 ocscp_ignored_processed_nf_notification_total

Field	Details
Description	Indicates the notifications that are not processed (ignored) because another notification with the same nfInstanceId is processed by another thread.
Type	Counter
Dimension	- nfType: NfType of the notification - nfInstanceId: NfInstanceId of the notification
Example	- ocscp_ignored_processed_nf_notification_total{namespace="ocscp"} - ocscp_ignored_processed_nf_notification_total{nfType="AUSF"}

Table 5-193 ocscp_notification_queue_waiting_time

Field	Details
Description	Indicates the time taken by the notification in the waiting queue.
Type	Counter

Table 5-193 (Cont.) ocscp_notification_queue_waiting_time

Field	Details
Dimension	• nfType: NfType of the notification • nflInstanceid: NfInstanceid of the notification • time: time taken by the notification in queue
Example	ocscp_notification_queue_waiting_time {namespace="ocscp"}

Table 5-194 ocscp_notification_profile_processing_time

Field	Details
Description	Indicates the total time taken to process notifications.
Type	Counter
Dimension	• nfType: NfType of the notification • nflInstanceid: NfInstanceid of the notification • nfProfileProcessingStatus: Status of the notification processing • processingTimeInMs: Total Time taken for notification processing
Example	ocscp_notification_profile_processing_time {nfType = "AUSF"}

Table 5-195 ocscp_metric_5gsbi_upstream_destination_rejection_total

Field	Details
Description	Tracks the total number of upstream destinations rejected by SCP due to certain unhealthy conditions of the host, such as CircuitBreaker, Producer Congestion Control, etc.
Type	Counter
Dimension	• ocscp_nf_type (for example, UDM, PCF, AMF, and so on) • ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on.) • ocscp_nf_end_point (Default value = NA) • ocscp_producer_host (default value = NA, Contains fqdn of producer) • ocscp_authority • ocscp_cause: (for example, CircuitBreaking, OutlierDetection, NotRoutableNFState, ProducerPublishedCongestion, ProducerUnhealthy, UnHealthyandOutlieredSCP, and InternalError (in case of exception in formation of egress URI.)

Table 5-195 (Cont.) ocscp_metric_5gsbi_upstream_destination_rejection_total

Field	Details
Example	- ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_nf_type="PCF"} - ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_cause="CircuitBreaking"} - ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_nf_end_point="NA"} - ocscp_metric_5gsbi_upstream_destination_rejection_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"}

Table 5-196 ocscp_metric_5gsbi_rx_res_failure_total

Field	Details
Description	Tracks the total number of upstream response failures at SCP with a specific cause, such as ConnectionTimeout and UnknownHostException so on.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_nf_end_point (Default value = NA) - ocscp_response_code(e.g., 201, 503, 404, etc.) - ocscp_response_code_class (e.g., 2, 5, etc.) - ocscp_authority - scheme(e.g., https) - ocscp_cause
Example	- ocscp_metric_5gsbi_rx_res_failure_total{ocscp_nf_type="PCF"} - ocscp_metric_5gsbi_rx_res_failure_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_metric_5gsbi_rx_res_failure_total{scheme="https"} - ocscp_metric_5gsbi_rx_res_failure_total{ocscp_nf_end_point="NA"} - ocscp_metric_5gsbi_rx_res_failure_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:9443"} - ocscp_metric_5gsbi_rx_res_failure_total{ocscp_cause="UnknownHostException"}

Table 5-197 ocscp_configuration_dnssrv_nrf_non_migration_task_failure_count_total

Field	Details
Description	Indicates the number of failed nonmigrated tasks of the DNS SRV-based NRF Info feature. The nonmigrated tasks are as follows: - Capacity or priority update of target FQDN - New NRF SRV FQDN addition or deletion - NF Set update
Type	Counter
Dimensions	- nrfSrvFqdn - failureReason
Examples	- ocscp_configuration_dnssrv_nrf_non_migration_task_failure_count={nrfSrvFqdn="nrf1svc.scpsvc.svc.cluster.local"} - ocscp_configuration_dnssrv_nrf_non_migration_task_failure_count={failureReason="START_NRF_RULE_PROCESSING"}

Table 5-198 ocscp_configuration_dnssrv_nrf_non_migration_task_success_count_total

Field	Details
Description	Indicates the number of successful nonmigrated tasks. The nonmigrated tasks are as follows: - Capacity or priority update of the target FQDN - New NRF SRV FQDN addition or deletion - NF Set update
Type	Counter
Dimensions	nrfSrvFqdn
Examples	ocscp_configuration_dnssrv_nrf_non_migration_task_success_count_total={nrfSrvFqdn="nrf1svc.scpsvc.svc.cluster.local"}

Table 5-199 ocscp_configuration_dnssrv_nrf_non_migration_task_failure

Field	Details
Description	Indicates the status of the nonmigrated task of the DNS SRV based NRF Info feature. The status of nonmigrated tasks will be either 0 or 1. The nonmigrated tasks are as follows: - Capacity or priority update of target FQDN - New NRF SRV FQDN addition or deletion - NF Set update
Type	Gauge
Dimensions	- nrfSrvFqdn - failureReason - taskId - taskName - taskState - eventName - msName

Table 5-199 (Cont.) ocscp_configuration_dnssrv_nrf_non_migration_task_failure

Field	Details
Examples	- ocscp_configuration_dnssrv_nrf_non_migration_task_failure={nrfSrvFqdn="nrf1svc.scpsvc.svc.cluster.local"} - ocscp_configuration_dnssrv_nrf_non_migration_task_failure={failureReason="RETRY_EVENT_COUNT_EXPIRED"} - ocscp_configuration_dnssrv_nrf_non_migration_task_failure={taskId=1234} - ocscp_configuration_dnssrv_nrf_non_migration_task_failure={taskName="NRF_SET_DELETED_TASK"} - ocscp_configuration_dnssrv_nrf_non_migration_task_failure={eventName="START_NRF_RULE_PROCESSING"} - ocscp_configuration_dnssrv_nrf_non_migration_task_failure={msName="scpc-notification"} - ocscp_configuration_dnssrv_nrf_non_migration_task_failure={taskState="UNSUB_DEREG_COMPLETED"}

Table 5-200 ocscp_configuration_dnssrv_nrf_migration_task_failure

Field	Details
Description	Indicates the status of the migrated task of the DNS SRV based NRF Info feature. The status of migrated tasks will be either 0 or 1. The migrated tasks are as follows: - Static(custom.values.yaml file) to DNS SRV based NRF migration - DNS SRV based NRF to static(custom.values.yaml) migration If there is any failure in the following migration task, then the value will become 1, otherwise the value will be 0.
Type	Gauge
Dimensions	- failureReason - taskId - taskName - taskState - eventName - msName
Examples	- ocscp_configuration_dnssrv_nrf_migration_task_failure={failureReason=WAIT_TIME_FOR_COMPLETION_RESP_ELAPSED, RETRY_EVENT_COUNT_EXPIRED} - ocscp_configuration_dnssrv_nrf_migration_task_failure={taskId=1234} - ocscp_configuration_dnssrv_nrf_migration_task_failure={taskName="MIGRATION_OF_NRF_INFO_FROM_STATIC_TO_DNS"} - ocscp_configuration_dnssrv_nrf_migration_task_failure={eventName="FEATURE_ENABLED"} - ocscp_configuration_dnssrv_nrf_migration_task_failure={msName="scpc-configuration"} - ocscp_configuration_dnssrv_nrf_migration_task_failure={taskState="WAITING_FOR_DNS_SRV_DATA"}

Table 5-201 ocscp_configuration_dnssrv_nrf_duplicate_target_detected

Field	Details
Description	Indicates when duplicate target FQDNs are detected across different NRF SRV FQDNs.
Type	Gauge
Dimensions	- nrfSrvFqdn - ocscp_fqdn
Examples	- ocscp_configuration_dnssrv_nrf_duplicate_target_detected={nrfSrvFqdn="nrf1svc.scpsvc.svc.cluster.local"} - ocscp_configuration_dnssrv_nrf_duplicate_target_detected={ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-202 ocscp_subscription_nrf_deregistration_success_total

Field	Details
Description	Indicates the number of successful deregistrations with NRF.
Type	Counter
Dimensions	- ocscp_fqdn - nrfRegionOrSetId
Examples	- ocscp_subscription_nrf_deregistration_success_total={nrfRegionOrSetId="setnrf1.nrfset.5gc.mnc012.mcc345"} - ocscp_subscription_nrf_deregistration_success_total={ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-203 ocscp_subscription_nrf_deregistration_failure_total

Field	Details
Description	Indicates the number of failed deregistrations with NRF.
Type	Counter
Dimensions	nrfRegionOrSetId
Examples	ocscp_subscription_nrf_deregistration_failure_total={nrfRegionOrSetId="setnrf1.nrfset.5gc.mnc012.mcc345"}

Table 5-204 ocscp_worker_peer_oci_conveyance_total

Field	Details
Description	Increments when SCP-Worker forwards a peer NF's Overload Control Information (OCI) header, that is, relays an incoming OCI header rather than adding its own. It displays the number of messages routed by SCP with peer NF's OCI header.
Type	Counter
Dimensions	- ocscp_peer_nf_instance_id (instanceId of peer towards which OCI of peer is conveyed) - ocscp_fqdn

Table 5-204 (Cont.) ocscp_worker_peer_oci_conveyance_total

Field	Details
Examples	- ocscp_worker_peer_oci_conveyance_total{ocscp_peer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_peer_oci_conveyance_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-205 ocscp_worker_oci_conveyance_total

Field	Details
Description	Indicates the number of messages routed by SCP with SCP's OCI header.
Type	Counter
Dimensions	- ocscp_peer_nf_instance_id - ocscp_fqdn
Examples	- ocscp_worker_oci_conveyance_total{ocscp_peer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_oci_conveyance_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-206 ocscp_worker_oci_enforced_total

Field	Details
Description	Indicates the number of messages on which OCI is enforced causing those messages to be responded with error or alternate routed.
Type	Counter
Dimensions	- ocscp_producer_nf_instance_id - ocscp_nf_service_type - action - error_sent - rerouted - ocscp_smp_priority - ocscp_fqdn
Examples	- ocscp_worker_oci_enforced_total{ocscp_producer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_oci_enforced_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_worker_oci_enforced_total{action="rerouted"} - ocscp_worker_oci_enforced_total{ocscp_smp_priority="10"} - ocscp_worker_oci_enforced_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-207 ocscp_worker_rx_unsupported_oci_scope_total

Field	Details
Description	Indicates the number of messages received with unsupported OCI scope from peer.
Type	Counter
Dimensions	- scope - ocscp_fqdn
Examples	- ocscp_worker_rx_unsupported_oci_scope_total{scope="S-NSSAI: {"sst": 1, "sd": "A08923"}; DNN: internet.mnc012.mcc345.gprs"} - ocscp_worker_rx_unsupported_oci_scope_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-208 ocscp_metric_nf_oci_rx_total

Field	Details
Description	Indicates the number of messages received with OCI.
Type	Counter
Dimensions	- ocscp_peer_nf_instance_id - ocscp_fqdn
Examples	- ocscp_metric_nf_oci_rx_total{ocscp_peer_nf_instance_id="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_metric_nf_oci_rx_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-209 ocscp_metric_trafficfeed_partition_unhealthy

Field	Details
Description	No leader is available for Kafka partition.
Type	Gauge
Dimensions	- kafka_partition_id - topic - cause - no_leader - unreachable
Examples	ocscp_metric_trafficfeed_partition_unhealthy{ocscp_cause="no_leader",ocscp_nf_service_type="nudm-uecm",ocscp_trafficfeed_triggerpoint="requestEgress",kafka_partition_id="NA",kafka_broker_id="NA"}

Table 5-210 ocscp_metric_trafficfeed_success_total

Field	Details
Description	Number of messages sent to traffic feed. This metric is unavailable when "acks" is set to "0". To make it available, change "acks" to "1" or "all".
Type	Counter

Table 5-210 (Cont.) ocscp_metric_trafficfeed_success_total

Field	Details
Dimensions	• nfServiceType (e.g. nudm-uecm, nudm-sdm, etc.) • triggerpoint (e.g. requestIngress, requestEgress, responseIngress, responseEgress) • kafka_partition_id • kafka_broker_id
Examples	ocscp_metric_trafficfeed_success_total{ocscp_nf_service_type="nausf-auth",ocscp_trafficfeed_triggerpoint="requestEgress",kafka_partition_id="NA",kafka_broker_id="NA"}

Table 5-211 ocscp_metric_trafficfeed_cluster_unhealthy

Field	Details
Description	The whole traffic feed Kafka cluster is down.
Type	Gauge
Dimensions	cause (unreachable)
Examples	ocscp_metric_trafficfeed_cluster_unhealthy{ocscp_cause=unreachable}

Table 5-212 ocscp_ignore_unknown_service_total

Field	Details
Description	The total number of unknown services ignored in the NF profile.
Type	Counter
Dimensions	• nfInstanceId • nfType • serviceName
Examples	• ocscp_ignore_unknown_service_total{nfInstanceId=6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e} • ocscp_ignore_unknown_service_total{nfType=UDM} • ocscp_ignore_unknown_service_total{serviceName=nudm_unknown}

Table 5-213 ocscp_worker_ondemand_discovery_response_cache_skipped_total

Field	Details
Description	The total number of discovery responses from NRF to SCP-Worker that are skipped from being cached due to the configured rule (the configured rule is specified by the RuleName dimension).
Type	Counter
Dimensions	• rule_name • ocscp_nf_type • ocscp_fqdn

Table 5-213 (Cont.) ocscp_worker_ondemand_discovery_response_cache_skipped_total

Field	Details
Examples	- ocscp_worker_ondemand_discovery_response_cache_skipped_total{application Name="ocscp"} - ocscp_worker_ondemand_discovery_response_cache_skipped_total{microservice="scp-worker"} - ocscp_worker_ondemand_discovery_response_cache_skipped_total{ocscp_nf_type="PCF"} - ocscp_worker_ondemand_discovery_response_cache_skipped_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_worker_ondemand_discovery_response_cache_skipped_total{rule_name="rule2"}

Table 5-214 ocscp_worker_ondemand_discovery_response_cache_added_total

Field	Details
Description	The total number of discovery responses from NRF to SCP-Worker that are cached.
Type	Counter
Dimensions	- ocscp_nf_type - ocscp_fqdn
Examples	ocscp_worker_ondemand_discovery_response_cache_added_total{applicationName="ocscp",microservice="scp-worker",ocscp_nf_type="PCF",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle",}

Table 5-215 ocscp_worker_ondemand_discovery_response_cache_removed_total

Field	Details
Description	The total number of discovery responses from NRF to SCP-Worker that were removed from the cache either due to expiry time or queue overflow.
Type	Counter
Dimensions	- ocscp_nf_type - ocscp_fqdn
Examples	ocscp_worker_ondemand_discovery_response_cache_removed_total{applicationName="ocscp",microservice="scp-worker",ocscp_nf_type="PCF",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle",}

Table 5-216 ocscp_nrfproxy_ondemand_discovery_response_cache_skipped_total

Field	Details
Description	The total number of discovery responses from NRF to nrf-proxy that are skipped from being cached due to the configured rule (the configured rule is specified by the RuleName dimension).
Type	Counter
Dimensions	- rule_name - ocscp_producer_nf_type
Examples	ocscp_nrfproxy_ondemand_discovery_response_cache_skipped_total{microservice="scp-nrfproxy",ocscp_producer_nf_type="PCF",rule_name="rule1",}

Table 5-217 ocscp_nrfproxy_ondemand_discovery_response_cache_added_total

Field	Details
Description	The total number of discovery responses from NRF to nrf-proxy that are cached.
Type	Counter
Dimensions	ocscp_producer_nf_type
Examples	ocscp_nrfproxy_ondemand_discovery_response_cache_added_total{microservice="scp-nrfproxy",ocscp_producer_nf_type="PCF"}

Table 5-218 ocscp_nrfproxy_ondemand_discovery_response_cache_removed_total

Field	Details
Description	The total number of discovery responses from NRF to nrf-proxy that were removed from the cache either due to expiry time or queue overflow.
Type	Counter
Dimensions	ocscp_producer_nf_type
Examples	ocscp_nrfproxy_ondemand_discovery_response_cache_removed_total{microservice="scp-nrfproxy",ocscp_producer_nf_type="PCF"}

Table 5-219 ocscp_worker_problemdetails_details_maxlengthexceeded_total

Field	Details
Description	Number of messages for which the ProblemDetails.detail parameter in the error response exceeded the configured value for errorDetailMaxSize in SCP Features REST API for enhanced_error_rsp configuration.
Type	Counter
Dimensions	ocscp_attempted_producers
Examples	ocscp_worker_problemdetails_details_maxlengthexceeded_total{applicationName="ocscp",microservice="scp-worker",ocscp_attempted_producers="[udm1svc.scpsvc.svc.cluster.local,udm2svc.scpsvc.svc.cluster.local]",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle"}

Table 5-220 ocscp_worker_object_pool_in_use_objects

Field	Details
Description	The total number of pool objects currently in use.
Type	Gauge
Dimensions	ocscp_object_pool_name
Examples	ocscp_worker_object_pool_in_use_objects{ocscp_object_pool_name=STREAM_INF_OBJECT_POOL}

Table 5-221 ocscp_worker_object_pool_ready_to_use_objects

Field	Details
Description	The total number of pool objects present in the pool is ready to be used.
Type	Gauge
Dimensions	ocscp_object_pool_name

Table 5-221 (Cont.) `ocscp_worker_object_pool_ready_to_use_objects`

Field	Details
Examples	<code>ocscp_worker_object_pool_ready_to_use_objects{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL}</code>

Table 5-222 `ocscp_worker_object_pool_created_objects`

Field	Details
Description	The total number of pool objects created.
Type	Gauge
Dimensions	<code>ocscp_object_pool_name</code>
Examples	<code>ocscp_worker_object_pool_created_objects{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL}</code>

Table 5-223 `ocscp_metric_http_egress_res_total`

Field	Details
Description	The total number of egress 5G SBI responses from SCP, including 5G SBI service responses, notification responses, and SCP health check response messages. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimensions	NA
Examples	<code>ocscp_metric_http_egress_res_total{applicationName="ocscp",microservice="scp-worker",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle"}</code>

Table 5-224 `ocscp_metric_http_ingress_req_total`

Field	Details
Description	The total number of ingress 5G SBI requests at SCP includes 5G SBI service requests, notification requests, and SCP health check request messages. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimensions	NA
Examples	<code>ocscp_metric_http_ingress_req_total{applicationName="ocscp",microservice="scp-worker",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle"}</code>

Table 5-225 `ocscp_worker_object_pool_denied_total`

Field	Details
Description	The total count of pool objects denied once <code>MAX_POOL_SIZE</code> is reached.
Type	Counter
Dimensions	NA
Examples	<code>ocscp_worker_object_pool_denied_total{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL}</code>

Table 5-226 ocscp_worker_object_pool_tran_timeout_objects_total

Field	Details
Description	The total counts of pool objects getting total transaction timeouts during different async transaction states in the callflow.
Type	Counter
Dimensions	- ocscp_object_pool_name - ocscp_worker_client_name - ocscp_object_trans_state
Examples	- ocscp_worker_object_pool_tran_timeout_objects_total{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL} - ocscp_worker_object_pool_tran_timeout_objects_total{ocscp_worker_client_name=NRF_PROXY_CLIENT} - ocscp_worker_object_pool_tran_timeout_objects_total{ocscp_object_trans_state=ON_PROGRESS}

Table 5-227 ocscp_worker_object_pool_clash_in_callback_total

Field	Details
Description	The total counts of pool objects getting clashed due to an unexpected async flow sequence conflict or usage time ambiguity.
Type	Counter
Dimensions	- ocscp_object_pool_name - ocscp_worker_client_name - clash_type
Examples	- ocscp_worker_object_pool_clash_in_callback_total{ocscp_object_pool_name=STREAM_INFO_OBJECT_POOL} - ocscp_worker_object_pool_clash_in_callback_total{ocscp_worker_client_name=NRF_PROXY_CLIENT} - ocscp_worker_object_pool_clash_in_callback_total{clash_type = BY_SEQ}

Table 5-228 ocscp_metric_message_current_request_rate_total

Field	Details
Description	The total number of current request rate per rate limit bucket key.
Type	Counter
Dimensions	- ocscp_fqdn - bucketKey
Examples	- ocscp_metric_message_current_request_rate_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} - ocscp_metric_message_current_request_rate_total{bucketKey="egress_pcf1svc.ny-ocscp-01.svc.thrust2"}

Table 5-229 coherence_cache_hits

Field	Details
Description	The total number of cache hits since the last statistics reset. A cache hit refers to a read operation invocation for which an entry exists in this map.
Type	Counter

Table 5-229 (Cont.) coherence_cache_hits

Field	Details
Dimensions	- coherenceCluster - name (cache name)
Examples	coherence_cache_hits{coherenceCluster="scp-coherence-cluster"}

Table 5-230 coherence_cache_size

Field	Details
Description	The total number of entries in cache.
Type	Counter
Dimensions	- coherenceCluster - name (cache name)
Examples	coherence_cache_size{coherenceCluster="scp-coherence-cluster"}

Table 5-231 ocscp_worker_https_ingress_connection_success_total

Field	Details
Description	This metric will be pegged upon the successful establishment of an Ingress HTTPS connection. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimensions	- tls_version - source - destination
Examples	- ocscp_worker_https_ingress_connection_success_total{tls_version="TLSv1.3"} - ocscp_worker_https_ingress_connection_success_total{source="192.168.219.12"} - ocscp_worker_https_ingress_connection_success_total{destination="192.168.219.88:9443"}

Table 5-232 ocscp_worker_https_ingress_connection_failure_total

Field	Details
Description	This metric will be pegged by Ingress connection failures, where failure refers to the inability to establish a connection due to handshake failure. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimensions	- failureReason - tls_version - source - destination

Table 5-232 (Cont.) ocscp_worker_https_ingress_connection_failure_total

Field	Details
Examples	- ocscp_worker_https_ingress_connection_failure_total{destination="192.168.219.88:9443"} - ocscp_worker_https_ingress_connection_failure_total{tls_version="TLSv1.3"} - ocscp_worker_https_ingress_connection_failure_total{source="192.168.219.122"} - ocscp_worker_https_ingress_connection_failure_total{ failureReason="TLS Handshake failed. Reason: Client requested protocol TLSv1.2 is not enabled or supported in server context"}

Table 5-233 ocscp_worker_https_egress_connection_success_total

Field	Details
Description	This metric will be pegged upon the successful establishment of an egress HTTPS connection. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimensions	- tls_version - destination
Examples	- ocscp_worker_https_egress_connection_success_total{tls_version="TLSv1.3"} - ocscp_worker_https_egress_connection_success_total{destination="10.98.212.210:8443"}

Table 5-234 ocscp_worker_https_egress_connection_failure_total

Field	Details
Description	This metric will be pegged in the case of egress HTTPS connection failures. Here, failure refers to the inability to establish a connection due to handshake failure. Note: Peg this metric for both HTTP and HTTPS traffic because Hypertext Transfer Protocol Secure (HTTPS) is the secured version of HTTP.
Type	Counter
Dimensions	- failureReason - tls_version - destination
Examples	- ocscp_worker_https_egress_connection_failure_total{tls_version="TLSv1.3"} - ocscp_worker_https_egress_connection_failure_total{destination="10.98.212.210:8443"} - ocscp_worker_https_egress_connection_failure_total{failureReason="certificate expired"}

Table 5-235 ocscp_worker_5gsbi_upstream_connect_failure_total

Field	Details
Description	This metric is pegged when an upstream connection with a producer NF fails.
Type	Counter

Table 5-235 (Cont.) ocscp_worker_5gsbi_upstream_connect_failure_total

Field	Details
Dimensions	- ocscp_producer_host (default value = unknown, Contains fqdn of producer) - ocscp_nf_end_point (default value =unknown, Contains IPAddress and Port of producer)
Examples	- ocscp_worker_5gsbi_upstream_connect_failure_total{ocscp_nf_end_point="10.233.19.102:8080",ocscp_producer_host="udm1svc.scpsvc.svc.cluster.local"} - ocscp_worker_5gsbi_upstream_connect_failure_total{ocscp_nf_end_point="[fd00:0:0:2:0:0:0:6978]:8080",ocscp_producer_host="udm1svc.scpsvc.svc.cluster.local"}

Table 5-236 ocscp_nrfproxy_oauth_queue_alert

Field	Details
Description	This metric is pegged when the metric value is either 0 or 1. If the severity reaches Minor, Major, or Critical, the value is 1, else 0.
Type	Gauge
Dimensions	- queueName: name of the queue (accessTokenCohEvExecutorQueue, accessTokenAppEvExecutorQueue, scpUpstreamExecutorQueue, scpDownstreamExecutorQueue) - queueCapacity: The maximum size of queue is 10000 - severity: CRITICAL, MAJOR, MINOR
Examples	- ocscp_nrfproxy_oauth_queue_alert{severity="CRITICAL"} - ocscp_nrfproxy_oauth_queue_alert{severity="MAJOR"} - ocscp_nrfproxy_oauth_queue_alert{severity="MINOR"}

Table 5-237 ocscp_worker_pod_overload_control_cpu_utilization_total

Field	Details
Description	This metric is pegged when the CPU threshold exceeds the configured overload levels.
Type	Counter
Dimensions	ocscp_threshold_level
Examples	ocscp_worker_pod_overload_control_cpu_utilization_total{ocscp_threshold_level="MINOR"}

Table 5-238 ocscp_worker_self_oci_above_oci_conveyance_threshold_total

Field	Details
Description	This metric is pegged when SCP's load exceeds the configured load for self OCI conveyance.
Type	Counter
Dimensions	ocscp_oci_threshold_level
Examples	ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_threshold_level="CRITICAL"}

Table 5-239 ocscp_worker_outstanding_requests

Field	Details
Description	This metric tracks the number of requests for which SCP is waiting for a response after routing to the upstream peer. It will be pegged regardless of whether Circuit Breaker (CB) is enabled or not.
Type	Gauge
Dimensions	- ocscp_producer_host - ocscp_nf_service_type - ocscp_nf_id - ocscp_locality
Examples	- ocscp_worker_outstanding_requests{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_worker_outstanding_requests{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_outstanding_requests{ocscp_nf_id="2fbf1bbc-6e4b-3994-b507-b14ef8e1bc51#f86b54b7-aef9-4c78-b346-3bfb7f380811"} - ocscp_worker_outstanding_requests{ocscp_locality="Loc7"}

Table 5-240 ocscp_nrfproxy_ondemand_discovery_cache_notif_local_refresh_total

Field	Details
Description	This metric is pegged at the scp-nrfproxy when the received NF profile causes the cache at scp-nrfproxy to be updated locally.
Type	Counter
Dimensions	- ocscp_producer_nf_instance_id - ocscp_producer_service_instance_id
Examples	ocscp_nrfproxy_ondemand_discovery_cache_notif_local_refresh_total{ocscp_producer_nf_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27",ocscp_producer_service_instance_id="8faf1bbc-6e4a-4454-a507-aef01a101a33"}

Table 5-241 ocscp_nrfproxy_ondemand_discovery_cache_invalid_notif_nrf_refresh_total

Field	Details
Description	This metric is pegged at the scp-nrfproxy when the received NF profile causes a cache record at scp-nrfproxy to be marked as invalid.
Type	Counter
Dimensions	- ocscp_producer_nf_instance_id - ocscp_producer_service_instance_id
Examples	ocscp_nrfproxy_ondemand_discovery_cache_invalid_notif_nrf_refresh_total{ocscp_producer_nf_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27",ocscp_producer_service_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27"}

Table 5-242 ocscp_worker_ondemand_discovery_cache_notif_local_refresh_total

Field	Details
Description	This metric is pegged at the scp-worker when the received NF profile causes a cache record at the scp-worker to be updated locally.
Type	Counter

Table 5-242 (Cont.) `ocscp_worker_ondemand_discovery_cache_notif_local_refresh_total`

Field	Details
Dimensions	<code>ocscp_producer_nf_instance_id</code> <code>ocscp_producer_service_instance_id</code>
Examples	<code>ocscp_worker_ondemand_discovery_cache_notif_local_refresh_total{ocscp_producer_nf_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27",ocscp_producer_service_instance_id="8faf1bbc-6e4a-4454-a507-aef01a101a11"}</code>

Table 5-243 `ocscp_worker_ondemand_discovery_cache_invalid_notif_nrf_refresh_total`

Field	Details
Description	This metric is pegged at the scp-worker when the received NF profile causes a cache record at the scp-worker to be marked as invalid.
Type	Counter
Dimensions	<code>ocscp_producer_nf_instance_id</code> <code>ocscp_producer_service_instance_id</code>
Examples	<code>ocscp_worker_ondemand_discovery_cache_invalid_notif_nrf_refresh_total{ocscp_producer_nf_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27",ocscp_producer_service_instance_id="7faf1bbc-6e4a-4454-a507-aef01a101a27"}</code>

Table 5-244 `ocscp_nrfproxy_ondemand_discovery_cache_nrf_refreshed_status_total`

Field	Details
Description	This metric is pegged at scp-nrfproxy when the invalid cache entry is refreshed after getting a discovery response from the NRF.
Type	Counter
Dimensions	<code>refresh_status</code> <code>ocscp_response_code</code>
Examples	<code>ocscp_nrfproxy_ondemand_discovery_cache_nrf_refreshed_status_total{refresh_status="Success",ocscp_response_code="200"}</code>

Table 5-245 `ocscp_worker_ssl_partial_secret`

Field	Details
Description	This metric is pegged to scp-worker when a Kubernetes secret is created or patched with incomplete information. A Kubernetes secret contains private key, certificate, CA bundle, truststore, and keystore password files. If any of these components are missing during creation or patching, this metric is triggered.
Type	Gauge
Dimensions	<code>secretName</code> <code>ocscp_fqdn</code>
Examples	<code>ocscp_worker_ssl_partial_secret{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}</code> <code>ocscp_worker_ssl_partial_secret{secretName="server-primary-ocscp-secret"}</code>

Table 5-246 ocscp_worker_ondemand_discovery_cache_nrf_refreshed_status_total

Field	Details
Description	This metric is pegged at scp-worker when the invalid cache entry is refreshed upon receiving a discovery response from the NRF.
Type	Counter
Dimensions	- refresh_status - ocscp_response_code
Examples	ocscp_worker_ondemand_discovery_cache_nrf_refreshed_status_total{ocscp_response_code="200",refresh_status="Success"}

Table 5-247 ocscp_worker_transaction_time_exhausted_total

Field	Details
Description	This metric indicates that the available time for SCP to further process a given request has exhausted at the scp-worker, based on the timestamp headers.
Type	Counter
Dimensions	- ocscp_producer_host - ocscp_nf_type - ocscp_nf_service_type - ocscp_fqdn - ocscp_timeout_point
Examples	- ocscp_worker_transaction_time_exhausted_total{ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_worker_transaction_time_exhausted_total{ocscp_nf_type="UDM"} - ocscp_worker_transaction_time_exhausted_total{ocscp_consumer_info="AMF#s3g1svc.scpsvc.svc.cluster.local#6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"} - ocscp_worker_transaction_time_exhausted_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",ocscp_nf_type="UDM",ocscp_producer_host="udm1svc.default.svc.cluster.local"} - ocscp_worker_transaction_time_exhausted_total{ocscp_timeout_point="NRF_PROXY"} Note: ocscp_consumer_info = (ocscp_consumer_nf_type#ocscp_consumer_host#ocscp_consumer_nf_instance_id)

Table 5-248 ocscp_worker_timestamp_headers_validation_fail_total

Field	Details
Description	This metric indicates the number of requests received with either invalid timestamp header values (for example, an invalid 3gpp-Sbi-Max-Rsp-Time header value) or invalid combinations of timestamp headers, but still processed by SCP. Note: SCP continues to route such requests using the configured routing options.
Type	Counter
Dimensions	- ocscp_producer_host - ocscp_nf_type - ocscp_nf_service_type - ocscp_consumer_info - ocscp_fqdn - ocscp_validation_failure

Table 5-248 (Cont.) ocscp_worker_timestamp_headers_validation_fail_total

Field	Details
Examples	ocscp_worker_timestamp_headers_validation_fail_total{ocscp_nf_service_type="npcf-smpolicycontrol", ocscp_validation_failure="INVALID_HDR_COMBINATION"}

Table 5-249 ocscp_nrfproxy_transaction_time_exhausted_total

Field	Details
Description	This metric indicates that the available time for SCP to further process a given request has exhausted at the nrf-proxy service, based on the timestamp headers.
Type	Counter
Dimensions	- ocscp_consumer_nf_type - ocscp_producer_nf_type - ocscp_nf_service_type
Examples	- ocscp_nrfproxy_transaction_time_exhausted_total{ocscp_consumer_nf_type="AMF"} - ocscp_nrfproxy_transaction_time_exhausted_total{ocscp_producer_nf_type="PCF"} - ocscp_nrfproxy_transaction_time_exhausted_total{ocscp_nf_service_type="npcf-smpolicycontrol"}

Table 5-250 ocscp_oauth_transaction_time_exhausted_total

Field	Details
Description	This metric indicates that the available time for SCP to further process a given request has exhausted at the nrf-proxy-oauth service, based on the timestamp headers.
Type	Counter
Dimensions	- ocscp_requester_nfType - ocscp_target_nfType
Examples	ocscp_oauth_transaction_time_exhausted_total{ocscp_requester_nfType="AMF", ocscp_target_nfType="PCF"}

Table 5-251 ocscp_worker_med_udv_read_failure_total

Field	Details
Description	This metric indicates that the read, access, or decode of user-defined variables in mediation has failed.
Type	Counter
Dimension	- ocscp_mediation_triggerpoint - ocscp_mediation_udv_name
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_med_udv_read_failure_total{ocscp_mediation_triggerpoint="requestIngress",ocscp_mediation_udv_name="userDefined-var2"}

Table 5-252 ocscp_worker_med_udv_usage_count_limit_exceeded_total

Field	Details
Description	This metric indicates that the count of user-defined variables in mediation for a particular transaction exceeds the configured maximum usage limit for a single transaction.
Type	Counter
Dimension	- ocscp_mediation_udv_max_usage_limit - ocscp_mediation_triggerpoint - ocscp_nf_type_nf_service_type
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_med_udv_usage_count_limit_exceeded_total{ocscp_mediation_triggerpoint="requestIngress",ocscp_mediation_udv_max_usage_limit="5",ocscp_nf_type_and_nf_service_type="UDM-nudm-sdm"}

Table 5-253 ocscp_worker_routing_options_selected_total

Field	Details
Description	This metric indicates the number of requests matching with the specific Routing Options configuration.
Type	Counter
Dimension	- producer_nf_info - message_info This dimension contains three sections: - Message type - Method - Notification type. (This is applicable only for notification messages. When notification type is empty or "*", append "NA" to this field.) - consumer_nf_info - api_specific_resource_uri - routing_options_config - ocscp_authority
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_routing_options_selected_total{producer_nf_info="UDM-nudm-uecm"} - ocscp_worker_routing_options_selected_total{message_info="svc-request-message-PUT"} - ocscp_worker_routing_options_selected_total{consumer_nf_info="AMF"} - ocscp_worker_routing_options_selected_total{api_specific_resource_uri="NA"} - ocscp_worker_routing_options_selected_total{routing_options_config="configsetname1"} - ocscp_worker_routing_options_selected_total{ocscp_authority="ocscp-scp-worker.scpsvc.svc.cluster.local:8000"}

Table 5-254 ocscp_notification_duplicate_profile_detected_total

Field	Details
Description	This metric indicates whether SCP has received any duplicate SCP or NRF instanceID for another nfType. This metric is pegged when: - Notification is received with NFProfile with self SCP's NFInstance Id. - Notification is received with NFProfile with configured NRF's NFInstance Id.
Type	Counter
Dimension	- receivedNfType - duplicateWithNfType - nfInstanceId
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_notification_duplicate_profile_detected_total{receivedNfType="PCF"} - ocscp_notification_duplicate_profile_detected_total{duplicateWithNfType="SCP"} - ocscp_notification_duplicate_profile_detected_total{nfInstanceId="6faf1bbc-6e4a-4454-a507-a14ef8e1bc5e"}

Table 5-255 ocscp_worker_pod_overload_control_pending_transaction_total

Field	Details
Description	This metric is pegged when the pending transaction overload threshold is above the normal level.
Type	Counter
Dimension	ocscp_threshold_level
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_pod_overload_control_pending_transaction_total{ocscp_threshold_level="MINOR"}

Table 5-256 ocscp_configuration_rejected_request_total

Field	Details
Description	This metric is pegged when the number of requests to the Configuration service exceeds the configured rate limit.
Type	Counter
Dimension	cause
Example usage to filter metric by dimension on the Grafana GUI	ocscp_configuration_rejected_request_total{cause="TOO_MANY_REQUESTS"}

Table 5-257 ocscp_notification_nf_profile_rejected_total

Field	Details
Description	This metric is pegged in the following scenarios: - When the number of NF Profile notifications to the scpc-notification service from NRF exceeds the configured rate limit. - When the notification queue reaches its maximum capacity. - When an internal exception occurs while adding notified NF Profile to notification queue.
Type	Counter
Dimension	cause
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_notification_nf_profile_rejected_total{cause="MSG_RATE_EXCEEDED"} - ocscp_notification_nf_profile_rejected_total{cause="QUEUE_FULL"} - ocscp_notification_nf_profile_rejected_total{cause="INTERNAL_ERROR"} - ocscp_notification_nf_profile_rejected_total{cause="MANDATORY_PARAM_MISSING"}

Table 5-258 ocscp_worker_object_pool_uuid_conflict_total

Field	Details
Description	This metric is pegged when there is reuse of transaction context, which is either cleaned or currently in use.
Type	Counter
Dimension	- ocscp_object_pool_name - ocscp_worker_client_name - operation_type
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_object_pool_uuid_conflict_total{ocscp_object_pool_name="STREAM_INFO_OBJECT_POOL",ocscp_worker_client_name="addRequestTotalTimeoutHandler"operation_type="BY_CONFLICT"}

Table 5-259 ocscp_worker_object_pool_operation_failure_total

Field	Details
Description	This metric is pegged when there is an object pool state operation failure.
Type	Counter
Dimension	- ocscp_object_pool_name - ocscp_worker_client_name - operation_type - ocscp_object_status_code
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_object_pool_operation_failure_total{ocscp_object_pool_name="STREAM_INFO_OBJECT_POOL",ocscp_worker_client_name="DestForwardClient::destCallback",operation_type="POST_ACR", ocscp_object_status_code="OP_DENIED"}

Table 5-260 ocscp_worker_rx_notification_req_total

Field	Details
Description	This metric indicates the total number of notification requests received by SCP.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_notification_type - ocscp_rbh_present - ocscp_rbh_svc_name_present
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_rx_notification_req_total {ocscp_notification_type="EXPLICIT_NOTIFICATION", ocscp_rbh_present="true", ocscp_rbh_svc_name_present="false"} - ocscp_worker_rx_notification_req_total {ocscp_nf_type="UDM", ocscp_rbh_present="true", ocscp_rbh_svc_name_present="false"} - ocscp_worker_rx_notification_req_total {ocscp_rbh_present="true"} - ocscp_worker_rx_notification_req_total {ocscp_notification_type="EXPLICIT_NOTIFICATION", ocscp_nf_type="NA", ocscp_rbh_present="false", ocscp_rbh_svc_name_present="false"}

Table 5-261 ocscp_notification_nf_profiles_count

Field	Details
Description	Indicates the number of NF profiles received by SCP.
Type	Gauge
Dimension	- nftype (for example, UDM, AMF) - nfStatus(for example, REGISTERED/SUSPENDED/UNDISCOVERABLE)
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_notification_nf_profiles_count{nftype="UDM"} - ocscp_notification_nf_profiles_count{nfStatus="REGISTERED"}

Table 5-262 ocscp_worker_pod_cpu_load

Field	Details
Description	Indicates SCP-Worker pod CPU load.
Type	Gauge
Dimension	- applicationName - ocscp_fqdn - vendor
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_pod_cpu_load{applicationName="ocscp",microservice="scp-worker",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle"}

Table 5-263 ocscp_metric_notif_to_worker_data_fetching_time_total

Field	Details
Description	Records the routing rule data fetching time from SCPC-Notification to SCP-Worker into the time buckets, for example, 150ms, 300ms, 450s, 600ms, >600ms.
Type	Counter
Dimension	ocscp_processing_time (for example, 150ms, 300ms, 450s, 600ms, >600ms)

Table 5-263 (Cont.) ocscp_metric_notif_to_worker_data_fetching_time_total

Field	Details
Example usage to filter metric by dimension on the Grafana GUI	ocscp_metric_notif_to_worker_data_fetching_time_total{applicationName="ocscp",microservice="scp-worker",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",ocscp_processing_time="150ms",vendor="Oracle"}

Table 5-264 ocscp_worker_nf_profile_sync_status_total

Field	Details
Description	Checks the failure status of profile synchronization events between SCP-Notification and SCP-Worker.
Type	Counter
Dimension	- ocscp_nf_instance_id (String): Unique ID to identify profile. - ocscp_nf_type (String): Type of NF (for example, AMF, SMF, and so on). - topology_source (TopologySource): Source of the profile. - profile_sync_event (ServiceChangeStatus): The event status related to the profile sync attempt(UPDATED,CREATED,DELETED). - status (WorkerRuleSyncStatus): The result/status of the worker rule synchronization(SUCCESS, FAILURE).
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_nf_profile_sync_status_total{ocscp_nf_instance_id="99999999-e9ce-0205-aada-71a76214d44c",ocscp_nf_type="AMF",topology_source="NRF",profile_sync_event="UPDATED",status="FAILURE"} 2

Table 5-265 ocscp_worker_nf_profile_sync_failure_status

Field	Details
Description	Tracks the failure status of profile synchronized events between SCP-Notification and SCP-Worker. Each time a profile synchronization attempt fails, this metric is triggered (set to 1) to indicate a failure and when the profile for the same instanceId is successfully synchronized, it is reset to 0.
Type	Gauge
Dimension	- ocscp_nf_instance_id (String): Unique id to identify profile. - ocscp_nf_type (String): The type of the NF (for example, AMF, SMF, and so on).
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_nf_profile_sync_failure_status{ocscp_nf_instance_id="99999999-e9ce-0205-aada-71a76214d44c",ocscp_nf_type="AMF"} 1

Table 5-266 ocscp_audit_completion_time_total

Field	Details
Description	Captures the audit process completion time into the time buckets, for example, 150 ms, 300 ms, 450 ms, 600 ms, and more than 600 ms.
Type	Counter
Dimension	- processingTime(for example, 150 ms, 300 ms, 450 ms, 600 ms, ...>5m) - audit_type('Scheduled' or 'On-demand') - nrfRegionOrSetId - SCPINSTANCEID

Table 5-266 (Cont.) ocscp_audit_completion_time_total

Field	Details
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_audit_completion_time_total{auditType="scheduled",nrfRegionOrSetId="ALL",processingTime="16s"} - ocscp_audit_completion_time_total{auditType="scheduled",nrfRegionOrSetId="setnrf11.nrfset.5gc.mnc012.mcc345",processingTime="16s"}

Table 5-267 ocscp_notification_db_read_time_total

Field	Details
Description	Captures the time taken to fetch NF profile data between the database and the notification microservice into time buckets, for example, 150 ms, 300 ms, 450 ms, 600 ms, and more than 600 ms.
Type	Counter
Dimension	processingTimeInMs(for example, 150 ms, 300 ms, 450 ms, 600 ms, >600 ms)
Example usage to filter metric by dimension on the Grafana GUI	ocscp_metric_notification_db_read_time_total{processingTimeInMs="150ms"}

Table 5-268 ocscp_worker_ingress_stream_cancelled_total

Field	Details
Description	Pegged when the ingress stream is cancelled by consumer NFs.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_consumer_nf_type - ocscp_consumer_nf_instance_id
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_ingress_stream_cancelled_total{ocscp_nf_type="AMF"} - ocscp_worker_ingress_stream_cancelled_total{ocscp_consumer_nf_type="UDM"} - ocscp_worker_ingress_stream_cancelled_total{ocscp_consumer_nf_instance_id="99999999-e9ce-0205-aada-71a76214d44c"}

Table 5-269 ocscp_worker_custom_roaming_proxy_http_rx_req_total

Field	Details
Description	Indicates the total number of HTTP requests received from a Custom Roaming Proxy.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on.) - ocscp_custom_roaming_proxy_nf_type (5GNIF) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on) - ocscp_locality (SCP site name, for example, Loc6, Loc7, and so on) - plmn_id (mnc123-mcc254) - ocscp_fqdn (contains FQDN of SCP) - ocscp_peer_roaming_proxy_info (This can have NF instance ID or FQDN based on the Via header format) - ocscp_authority

Table 5-269 (Cont.) ocscp_worker_custom_roaming_proxy_http_rx_req_total

Field	Details
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_http_rx_req_total{ocscp_nf_type="UDM"} - ocscp_worker_custom_oaming_proxy_http_rx_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_custom_oaming_proxy_http_rx_req_total{plmn_id="mnc123-mcc100"}

Table 5-270 ocscp_worker_custom_roaming_proxy_http_tx_req_total

Field	Details
Description	Indicates the total number of HTTP requests routed towards a Custom Roaming Proxy.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_custom_roaming_proxy_nf_type (5GNIF) - ocscp_nf_service_type (for example, nudm-uecm, nudm-sdm, and so on) - ocscp_nf_end_point (Default value = NA) - ocscp_locality (SCP site name, for example, Loc6, Loc7, and so on) - ocscp_custom_roaming_proxy_fqdn (default value = NA, Contains fqdn of roaming proxy) - plmn_id(mnc123-mcc254) - ocscp_authority
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_http_tx_req_total{ocscp_nf_type="UDM"} - ocscp_worker_custom_roaming_proxy_http_tx_req_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_custom_roaming_proxy_http_tx_req_total{ocscp_custom_roaming_proxy_fqdn="5gnif.scpsvc.svc.cluster.local"} - ocscp_worker_custom_roaming_proxy_http_tx_req_total{plmn_id="mnc123-mcc100"}

Table 5-271 ocscp_worker_custom_roaming_proxy_http_rx_res_total

Field	Details
Description	Indicates the total number of HTTP responses received from a Custom Roaming Proxy. The ocscp_nf_service_type dimension for notification can be "n<nfType>-unknown" or "NA-unknown". Where, <nfType> is any NF name.
Type	Counter
Dimension	- ocscp_response_code (e.g., 201, 503, 404, etc.) - ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_custom_roaming_proxy_nf_type(5GNIF) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_nf_end_point (Default value = NA) - ocscp_locality (SCP site name e.g., Loc6, Loc7, etc.) - ocscp_response_code_class (e.g., 2, 5, etc.) - ocscp_custom_roaming_proxy_fqdn (default value = NA, Contains fqdn of roaming proxy) - plmn_id(mnc123-mcc254) - ocscp_authority

Table 5-271 (Cont.) ocscp_worker_custom_roaming_proxy_http_rx_res_total

Field	Details
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_http_rx_res_total{ocscp_nf_type="UDM"} - ocscp_worker_custom_roaming_proxy_http_rx_res_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_custom_roaming_proxy_http_rx_res_total{ocscp_custom_roaming_proxy_fqdn="5gnif.scpsvc.svc.cluster.local"} - ocscp_worker_custom_roaming_proxy_http_rx_res_total{plmn_id="mnc123-mcc100"}

Table 5-272 ocscp_worker_custom_roaming_proxy_http_tx_res_total

Field	Details
Description	Indicates the total number of HTTP responses routed towards a Custom Roaming Proxy.
Type	Counter
Dimension	- ocscp_response_code (e.g., 201, 503, 404, etc.) - ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_custom_roaming_proxy_nf_type(5GNIF) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_response_code_class (e.g., 2, 5, etc.) - ocscp_custom_roaming_proxy_fqdn (default value = NA, Contains fqdn of roaming proxy) - plmn_id(mnc123-mcc254) - ocscp_authority
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_http_tx_res_total{ocscp_nf_type="UDM"} - ocscp_worker_custom_roaming_proxy_http_tx_res_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_custom_roaming_proxy_http_tx_res_total{ocscp_custom_roaming_proxy_fqdn="5gnif.scpsvc.svc.cluster.local"} - ocscp_worker_custom_roaming_proxy_http_tx_res_total{plmn_id="mnc123-mcc100"}

Table 5-273 ocscp_worker_custom_roaming_proxy_routing_attempt_fail_total

Field	Details
Description	Indicates the total number of inter-plmn request routing failed towards a Custom Roaming Proxy.
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_custom_roaming_proxy_nf_type(5GNIF) - ocscp_nf_service_type (e.g., nudm-uecm, nudm-sdm, etc.) - ocscp_nf_end_point (Default value = NA) - ocscp_custom_roaming_proxy_fqdn (default value = NA, Contains fqdn of roaming proxy) - plmn_id(mnc123-mcc254) - ocscp_authority - ocscp_error_group

Table 5-273 (Cont.) ocscp_worker_custom_roaming_proxy_routing_attempt_fail_total

Field	Details
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_routing_attempt_fail_total{ocscp_nf_type="UDM"} - ocscp_worker_custom_roaming_proxy_routing_attempt_fail_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_custom_roaming_proxy_routing_attempt_fail_total{ocscp_custom_roaming_proxy_fqdn="5gnif.scpsvc.svc.cluster.local"} - ocscp_worker_custom_roaming_proxy_routing_attempt_fail_total{plmn_id="mnc123-mcc100"}

Table 5-274 ocscp_worker_custom_roaming_proxy_routing_attempt_fail_current

Field	Details
Description	Sets to 1 if an inter-plmn request routing failed towards a Custom Roaming Proxy.
Type	Gauge
Dimension	- ocscp_custom_roaming_proxy_nf_type(5GNIF) - ocscp_nf_end_point (Default value = NA) - ocscp_custom_roaming_proxy_fqdn (default value = NA, Contains fqdn of roaming proxy) - plmn_id(mnc123-mcc254) - ocscp_authority
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_routing_attempt_fail_current{ocscp_custom_roaming_proxy_fqdn="5gnif.scpsvc.svc.cluster.local"} - ocscp_worker_custom_roaming_proxy_routing_attempt_fail_current{plmn_id="mnc123-mcc100"}

Table 5-275 ocscp_worker_custom_roaming_proxy_not_found_total

Field	Details
Description	Indicates the total number of inter-plmn requests failed because Custom Roaming Proxy is not configured for request PLMNs.
Type	Counter
Dimension	- ocscp_locality (SCP site name, for example, Loc6, Loc7, and so on) - ocscp_custom_roaming_proxy_nf_type (5GNIF) - plmn_id(mnc123-mcc254) - ocscp_authority
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_not_found_total{plmn_id="mnc123-mcc254"} - ocscp_worker_custom_roaming_proxy_not_found_total{ocscp_custom_roaming_proxy_nf_type="5GNIF"}

Table 5-276 ocscp_worker_custom_roaming_proxy_not_found_current

Field	Details
Description	Sets to 1 if an inter-plmn request failed because Custom Roaming Proxy was not configured for request PLMNs.
Type	Gauge

Table 5-276 (Cont.) ocscp_worker_custom_roaming_proxy_not_found_current

Field	Details
Dimension	- ocscp_locality (SCP site name, for example, Loc6, Loc7, and so on) - ocscp_custom_roaming_proxy_nf_type (5GNIF) - plmn_id(mnc123-mcc254) - ocscp_authority
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_not_found_current{plmn_id="mnc123-mcc254"} - ocscp_worker_custom_roaming_proxy_not_found_current{ocscp_custom_roaming_proxy_nf_type="5GNIF"}

Table 5-277 ocscp_worker_custom_roaming_proxy_unhealthy_total

Field	Details
Description	Indicates the number of times Custom Roaming Proxy was marked outlier.
Type	Counter
Dimension	- ocscp_custom_roaming_proxy_instance_id - ocscp_custom_roaming_proxy_end_point - ocscp_custom_roaming_proxy_fqdn - ocscp_locality - ocscp_fqdn
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_unhealthy_total{ocscp_custom_roaming_proxy_instance_id="123-55b"} - ocscp_worker_custom_roaming_proxy_unhealthy_total{ocscp_custom_roaming_proxy_end_point="10.23.34.54:8080"} - ocscp_worker_custom_roaming_proxy_unhealthy_total{ocscp_custom_roaming_proxy_fqdn="5gnif.svc.cluster.local.com"} - ocscp_worker_custom_roaming_proxy_unhealthy_total{ocscp_locality="Loc7"} - ocscp_worker_custom_roaming_proxy_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-278 ocscp_worker_custom_roaming_proxy_unhealthy_current

Field	Details
Description	Indicates if all the Custom Roaming Proxy are unhealthy.
Type	Gauge
Dimension	- ocscp_custom_roaming_proxy_nf_type(5GNIF) - ocscp_custom_roaming_proxy_instance_id - ocscp_custom_roaming_proxy_fqdn - ocscp_locality
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_unhealthy_current{ocscp_custom_roaming_proxy_nf_type="5GNIF"} - ocscp_worker_custom_roaming_proxy_unhealthy_current{ocscp_custom_roaming_proxy_instance_id="123-455b"} - ocscp_worker_custom_roaming_proxy_unhealthy_current{ocscp_custom_roaming_proxy_fqdn="5gnif.svc.cluster.local.com"} - ocscp_worker_custom_roaming_proxy_unhealthy_current{ocscp_locality="Loc7"}

Table 5-279 ocscp_worker_req_custom_roaming_proxy_unhealthy_total

Field	Details
Description	Indicates the number of messages not routed to selected Custom Roaming Proxy because of being unhealthy (marked outlier).
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_custom_roaming_proxy_nf_type (5GNIF) - ocscp_nf_service_type - ocscp_custom_roaming_proxy_instance_id - ocscp_custom_roaming_proxy_end_point - ocscp_custom_roaming_proxy_fqdn - ocscp_locality - ocscp_fqdn
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_req_custom_roaming_proxy_unhealthy_total{ocscp_nf_type="UDM"} - ocscp_worker_req_custom_roaming_proxy_unhealthy_total{ocscp_custom_roaming_proxy_nf_type="5GNIF"} - ocscp_worker_req_custom_roaming_proxy_unhealthy_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_req_custom_roaming_proxy_unhealthy_total{ocscp_custom_roaming_proxy_instance_id="123-455b"} - ocscp_worker_req_custom_roaming_proxy_unhealthy_total{ocscp_custom_roaming_proxy_end_point="10.23.34.54:8080"} - ocscp_worker_req_custom_roaming_proxy_unhealthy_total{ocscp_custom_roaming_proxy_fqdn="5gnif1.svc.cluster.local.com"} - ocscp_worker_req_custom_roaming_proxy_unhealthy_total{ocscp_locality="Loc7"} - ocscp_worker_req_custom_roaming_proxy_unhealthy_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-280 ocscp_worker_custom_roaming_proxy_selection_total

Field	Details
Description	Pegged whether a discovery request matches or not with any of the selection configurations.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_consumer_nf_type - ocscp_custom_roaming_proxy_nf_type (5GNIF) - ocscp_nf_service_type - plmn_id(mnc123-mcc254) - ocscp_roaming_proxy_selection_rule_name(configName (if matched) / NA)
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_selection_total{ocscp_nf_type="UDM"} - ocscp_worker_custom_roaming_proxy_selection_total{ocscp_custom_roaming_proxy_nf_type="5GNIF"} - ocscp_worker_custom_roaming_proxy_selection_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_custom_roaming_proxy_selection_total{plmn_id="mnc123-mcc254"} - ocscp_worker_custom_roaming_proxy_selection_total{ocscp_roaming_proxy_selection_rule_name="config1"}

Table 5-281 ocscp_worker_custom_roaming_proxy_mandatory_disc_param_missing_total

Field	Details
Description	Pegged when mandatory parameters are missing in the discovery request.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_consumer_nf_type - ocscp_custom_roaming_proxy_nf_type (5GNIF) - ocscp_nf_service_type - plmn_id(mnc123-mcc254)
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_mandatory_disc_param_missing_total{ocscp_nf_type="UDM"} - ocscp_worker_custom_roaming_proxy_mandatory_disc_param_missing_total{ocscp_custom_roaming_proxy_nf_type="5GNIF"} - ocscp_worker_custom_roaming_proxy_mandatory_disc_param_missing_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_custom_roaming_proxy_mandatory_disc_param_missing_total{plmn_id="mnc123-mcc254"}

Table 5-282 ocscp_worker_custom_roaming_proxy_nf_discovery_total

Field	Details
Description	Pegged based on whether the relevant rules are identified, depending on the discovery source.
Type	Counter
Dimension	- ocscp_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_consumer_nf_type (for example, UDM, PCF, AMF, and so on) - ocscp_custom_roaming_proxy_nf_type(5GNIF) - ocscp_nf_service_type - plmn_id(mnc123-mcc254) - discovery_source (SCP) - discovery_result (SUCCESS if Locally Discovered, else FAIL)
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_nf_discovery_total{ocscp_nf_type="UDM"} - ocscp_worker_custom_roaming_proxy_nf_discovery_total{ocscp_custom_roaming_proxy_nf_type="5GNIF"} - ocscp_worker_custom_roaming_proxy_nf_discovery_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_custom_roaming_proxy_nf_discovery_total{plmn_id="mnc123-mcc254"} - ocscp_worker_custom_roaming_proxy_nf_discovery_total{discovery_source="SCP"} - ocscp_worker_custom_roaming_proxy_nf_discovery_total{discovery_result="SUCCESS"}

Table 5-283 ocscp_worker_custom_roaming_proxy_via_header_limit_exceeded_total

Field	Details
Description	Pegged when the Via header for Custom Roaming Proxy is more than the configured value.

Table 5-283 (Cont.) ocscp_worker_custom_roaming_proxy_via_header_limit_exceeded_total

Field	Details
Type	Counter
Dimension	- ocscp_nf_type (e.g., UDM, PCF, AMF, etc.) - ocscp_nf_service_type - ocscp_locality - ocscp_max_via_header_processing_limit
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_custom_roaming_proxy_via_header_limit_exceeded_total{ocscp_nf_type="UDM"} - ocscp_worker_custom_roaming_proxy_via_header_limit_exceeded_total{ocscp_nf_service_type="nudm-uecm"} - ocscp_worker_custom_roaming_proxy_via_header_limit_exceeded_total{ocscp_locality="Loc7"} - ocscp_worker_custom_roaming_proxy_via_header_limit_exceeded_total{ocscp_max_via_header_processing_limit=10}

Table 5-284 ocscp_worker_nf_discovery_mode_total

Field	Details
Description	Indicates the number of discovery requests for a particular discovery source such as Model D or Model C, grouped by NF discovery source, target NF type, requester NF type, and NF service type.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_requester_nf_type - ocscp_nf_service_type - ocscp_nfdiscovery_source
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_nf_discovery_mode_total{ocscp_nf_type="SMF",ocscp_requester_nf_type="AMF",ocscp_nf_service_type="namf-comm",ocscp_nfdiscovery_source="SCP_FOLLOWED_BY_NRF"} 3

Table 5-285 ocscp_worker_local_nf_discovery_resolution_successful_total

Field	Details
Description	Indicates the total number of successful local NF discovery resolutions performed by SCP, grouped by target NF type, requester NF type, and NF service type.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_requester_nf_type
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_local_nf_discovery_resolution_successful_total{ocscp_nf_type="SMF",ocscp_requester_nf_type="AMF",ocscp_nf_service_type="namf-comm"} 3

Table 5-286 ocscp_worker_local_nf_discovery_successful_rule_match_successful_total

Field	Details
Description	Counts the number of requests where the local NF discovery rule is successfully matched and routing rules are found for the matched NF discovery rule.

Table 5-286 (Cont.) ocscp_worker_local_nf_discovery_successful_rule_match_successful_total

Field	Details
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_requester_nf_type
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_local_nf_discovery_successful_rule_match_successful_total{ocscp_nf_type="SMF", ocscp_nf_service_type="nnrf-nfm", ocscp_requester_nf_type="AMF"} 12345

Table 5-287 ocscp_worker_local_nf_discovery_successful_rule_match_unsuccessful_total

Field	Details
Description	Counts the number of requests where the local NF discovery rule is successfully matched, but no routing rule is found for the matched NF discovery rule.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_requester_nf_type
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_local_nf_discovery_successful_rule_match_unsuccessful_total{ocscp_nf_type="SMF",ocscp_requester_nf_type="AMF",ocscp_nf_service_type="namf-comm"} 3

Table 5-288 ocscp_worker_local_nf_discovery_resolution_unsuccessful_total

Field	Details
Description	Indicates the total number of unsuccessful local NF discovery resolutions performed by SCP, grouped by target NF type, requester NF type, and NF service type.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_requester_nf_type
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_local_nf_discovery_resolution_unsuccessful_total{ocscp_nf_type="SMF",ocscp_requester_nf_type="AMF",ocscp_nf_service_type="namf-comm"} 3

Table 5-289 ocscp_worker_nf_discovery_response_enhanced_total

Field	Details
Description	Counts the number of NRF NF discovery responses that SCP worker enhanced before returning them to the requester for a Model C discovery request or before using them for routing for a Model D delegated discovery request. Enhancement refers to adding additional NFs to the discovery response received from NRF based on the set ID of the received NFs and to applying or adjusting the priority and capacity attributes of the NFs in the discovery response.
Type	Counter

Table 5-289 (Cont.) ocscp_worker_nf_discovery_response_enhanced_total

Field	Details
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_requester_nf_type - ocscp_capacity_priority_updated
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_nf_discovery_response_enhanced_total{ocscp_nf_type="SMF",ocscp_requester_nf_type="AMF",ocscp_nf_service_type="namf-comm",ocscp_capacity_priority_updated="ALL_NFS"} 3

Table 5-290 ocscp_nrfproxy_2xx_empty_nf_array_rx_total

Field	Details
Description	Counts the number of successful NRF discovery responses (HTTP 2xx) in which the NF instances array is empty ("no candidates found").
Type	Counter
Dimension	- ocscp_producer_nf_type - ocscp_nf_service_type - ocscp_requester_nf_type - ocscp_nrf_service_type
Example usage to filter metric by dimension on the Grafana GUI	ocscp_nrfproxy_2xx_empty_nf_array_rx_total{microservice="scp-nrfproxy",ocscp_nf_service_type="npcf-smpolicycontrol",ocscp_nrf_service_type="nnrf-disc",ocscp_producer_nf_type="PCF",ocscp_requester_nf_type="AMF"} 6.0

Table 5-291 ocscp_worker_nf_discovery_success_response_processing_mode_total

Field	Details
Description	Counts the successful NF discovery responses processed by SCP-Worker and grouped by discovery processing mode. It is recorded when SCP-Worker successfully processes a discovery response (2xx outcome at the SCP worker's discovery layer) for a configured discovery mode, whether or not fallback was attempted during the process.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_requester_nf_type - ocscp_nfdiscovery_source - ocscp_nfdiscovery_fallback - ocscp_nfdiscovery_req_type
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_nf_discovery_success_response_processing_mode_total{ocscp_nf_type="AMF",ocscp_nf_service_type="Nnrf_NFDDiscovery",ocscp_requester_nf_type="SMF",ocscp_nfdiscovery_source="SCP",ocscp_nfdiscovery_fallback="false",ocscp_nfdiscovery_req_type="MODELCDISC_REQ"} 7

Table 5-292 ocscp_worker_nf_discovery_request_processing_status_total

Field	Details
Description	Indicates the total number of NF discovery request processing outcomes in SCP-Worker, grouped by target NF type, service name, requester NF type, discovery source, status, and request type. This metric is recorded upon completion of discovery processing for both Model C and Model D, regardless of success or failure.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_requester_nf_type - ocscp_nfdiscovery_source - status - ocscp_nfdiscovery_req_type
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_nf_discovery_request_processing_status_total{ocscp_nf_type="AMF", ocscp_nf_service_type="Nnrf_NFDDiscovery", ocscp_requester_nf_type="SMF", ocscp_nfdiscovery_source="SCP", ocscp_nfdiscovery_req_type="MODEL_C_DISC_REQ", status="SUCCESS"} 7

Table 5-293 ocscp_worker_local_discovery_processing_time_total

Field	Details
Description	Records the time taken by SCP to perform local discovery, grouped into time buckets of 1 ms, 2 ms, 4 ms, 8 ms, and so on.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_nfdiscovery_req_type (MODEL_C_DISC_REQ/ MODEL_D_DELEG_DISC_REQ) - ocscp_processing_time (for example, 1ms, 2ms, 4ms, 8ms, 16ms, 32ms, 64ms, 128ms, 256ms, 500ms, 1000ms, 2000ms, 3000ms, 5000ms, 10000ms, 15000ms, 20000ms, 30000ms, 40000ms, 50000ms, >50000ms)
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_local_discovery_processing_time_total{ocscp_nf_service_type="npcf-smpolicycontrol", ocscp_nf_type="PCF", ocscp_nfdiscovery_req_type="MODEL_D_DELEG_DISC_REQ", ocscp_processing_time="4ms"} 1 - ocscp_worker_local_discovery_processing_time_total{ocscp_nf_service_type="nrf-disc", ocscp_nf_type="NRF", ocscp_nfdiscovery_req_type="MODEL_C_DISC_REQ", ocscp_processing_time="4ms"} 1

Table 5-294 ocscp_worker_service_req_routing_information_absent_total

Field	Details
Description	Counts the service requests processed by SCP-Worker for which SCP was unable to derive any routing information.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_nfselection_mode

Table 5-294 (Cont.) ocscp_worker_service_req_routing_information_absent_total

Field	Details
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_service_req_routing_information_absent_total{ocscp_nf_type="SMF",ocscp_nf_service_type="namf-comm",ocscp_nfselection_mode="ENHANCED_CONSUMER_NF_SELECTION"} 3

Table 5-295 ocscp_worker_nrf_routing_info_absent_route_success_total

Field	Details
Description	Counts each instance where SCP successfully routes a request to NRF by using a configured fallback, due to the absence of routing information for NRF in the inbound message.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_nfselection_mode
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_nrf_routing_info_absent_route_success_total{ocscp_nf_type="SMF",ocscp_nf_service_type="namf-comm",ocscp_nfselection_mode="ENHANCED_CONSUMER_NF_SELECTION"} 3

Table 5-296 ocscp_worker_notification_req_routing_information_absent_total

Field	Details
Description	Counts SCP-processed notification requests for which SCP failed to derive routing information.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_nfselection_mode
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_notification_req_routing_information_absent_total{ocscp_nf_service_type="NA-unknown",ocscp_nf_type="NA",ocscp_nfselection_mode="CONSUMER_NF_SELECTION"} 1

Table 5-297 ocscp_worker_req_priority_capacity_enhanced_total

Field	Details
Description	Indicates the number of Model C SBI requests processed with NF selection mode set to enhanced-consumer-nf-selection, labeled by the configuration chosen to override capacity or priority.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_consumer_nf_type - ocscp_capacity_priority_updated
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_req_priority_capacity_enhanced_total{ ocscp_nf_type="AMF", ocscp_nf_service_type="AMF-namf-comm", ocscp_consumer_nf_type="SMF", ocscp_capacity_priority_updated=ALL_NFS} 12345

Table 5-298 ocscp_worker_rx_req_nf_selection_mode_total

Field	Details
Description	Counts the number of requests at SCP for different Nf-selection-modes.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_nfselection_mode
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_rx_req_nf_selection_mode_total{ocscp_nf_type="SMF",ocscp_nf_service_type="namf-comm",ocscp_nfselection_mode="CONSUMER_NF_SELECTION"} 3

Table 5-299 ocscp_worker_nf_selection_mode_header_match_conflict_total

Field	Details
Description	Emits when NF selection mode header matching detects a conflict (for example, multiple configured matches or an ambiguous match) while evaluating a matching rule. Each conflict increments the counter and is labeled with the implicated rule, service type, and matched indices.
Type	Counter
Dimension	- ocscp_nf_service_type - ocscp_nfselection_rule_matched_indexes - ocscp_nfselection_rule_name
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_nf_selection_mode_header_match_conflict_total{ocscp_nf_service_type="nnef-eventexposure",ocscp_nfselection_rule_matched_indexes="[0,1]",ocscp_nfselection_rule_name="rules2g5"} 5.0

Table 5-300 ocscp_worker_req_priority_capacity_enhanced_total

Field	Details
Description	Indicates the number of Model C SBI requests processed when the NF selection mode is enhanced-consumer-nf-selection, with a label indicating the configuration used to override capacity or priority.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_requester_nf_type - ocscp_capacity_priority_updated
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_req_priority_capacity_enhanced_total{ ocscp_nf_type="AMF", ocscp_nf_service_type="AMF-namf-comm", ocscp_requester_nf_type="SMF", ocscp_capacity_priority_updated=ALL_NFS} 12345

Table 5-301 ocscp_topologysource_toggle_total

Field	Details
Description	Gets incremented each time the SCP topology source configuration changes for a given NF type.
Type	Counter

Table 5-301 (Cont.) ocscp_topologysource_toggle_total

Field	Details
Dimension	• nfType • initialTopology • modifiedTopologySource
Example usage to filter metric by dimension on the Grafana GUI	• ocscp_topologysource_toggle_total{initialTopology="NRF",modifiedTopologySource="LOCAL",nfType="AUSF"} 1.0 • ocscp_topologysource_toggle_total{initialTopology="LOCAL",modifiedTopologySource="NRF",nfType="AUSF"} 1.0 • ocscp_topologysource_toggle_total{initialTopology="NRF",modifiedTopologySource="NRF_AND_LOCAL",nfType="AUSF"} 1.0

Table 5-302 ocscp_audit_nf_topology_force_refresh_audit_failure

Field	Details
Description	Checks the failure status of force refresh audit operations within the SCP-Audit microservice. Each time a force refresh audit attempt fails, the metric is set to 1 to indicate a failure for the given NF type and nrfRegionOrSetId.
Type	Gauge
Dimension	• nrfregionorsetid (String) • nfType (String)
Example usage to filter metric by dimension on the Grafana GUI	• ocscp_audit_nf_topology_force_refresh_audit_failure{applicationName="ocscp",nfType="CHF",nrfregionorsetid="setnrf1.nrfset.5gc.mnc012.mcc345",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} 1.0 • ocscp_audit_nf_topology_force_refresh_audit_failure{applicationName="ocscp",nfType="CUSTOM2",nrfregionorsetid="setnrf1.nrfset.5gc.mnc012.mcc345",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"} 1.0

Table 5-303 ocscp_self_profile_update_success_total

Field	Details
Description	Increments whenever an OCSCP self-profile update succeeds for the following parameters: • priority • capacity • load • plmnList • locality • servingScope • mateScpInfoList • mateSiteInfo
Type	Counter
Dimension	ocscp_fqdn
Example usage to filter metric by dimension on the Grafana GUI	ocscp_self_profile_update_success_total{ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local"}

Table 5-304 ocscp_worker_odh_response_tx_total

Field	Details
Description	Pegged when an outbound response is sent with the oc-3gpp-sbi-od-info header configured with od=true, indicating SCP-P failure in inter-SCP scenarios.
Type	Counter
Dimension	- ocscp_cause - ocscp_response_code - ocscp_consumer_scp_info
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_odh_response_tx_total{ocscp_cause="UNSPECIFIED_NF_FAILURE"} - ocscp_worker_odh_response_tx_total{ocscp_response_code="500"} - ocscp_worker_odh_response_tx_total{ocscp_consumer_scp_info="scp51svc.scp svc.svc.cluster.local"}

Table 5-305 ocscp_worker_nfgroupid_resolution_total

Field	Details
Description	Pegged when an NF GroupID retrieval rule is matched (for both INVOKE_GROUPID_RESOLUTION and SKIP_GROUPID_RESOLUTION actions).
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - config_name - resolution_action
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_nfgroupid_resolution_total{ocscp_nf_type="PCF"} - ocscp_worker_nfgroupid_resolution_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_worker_nfgroupid_resolution_total{config_name="nfgrp_rule_1"} - ocscp_worker_nfgroupid_resolution_total{resolution_action="INVOKE_GROUPID_RESOLUTION"}

Table 5-306 ocscp_worker_nfgroupid_resolution_failure_total

Field	Details
Description	Pegged when NF Group ID resolution fails. For example, child request build or submit failure, child error response, decode, or extract failure, or exception during processing.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - config_name - discovery_complete
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_nfgroupid_resolution_failure_total{ocscp_nf_type="PCF"} - ocscp_worker_nfgroupid_resolution_failure_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_worker_nfgroupid_resolution_failure_total{config_name="nfgrp_rule_1"} - ocscp_worker_nfgroupid_resolution_failure_total{discovery_complete="false"}

Table 5-307 ocscp_metric_peer_scp_unhealthy_total

Field	Details
Description	Specifies the number of times a peer SCP is marked unavailable.
Type	Counter
Dimension	- ocscp_peer_scp_fqdn - ocscp_peer_scp_instance_id - ocscp_locality
Example usage to filter metric by dimension on the Grafana GUI	ocscp_metric_peer_scp_unhealthy_total{ocscp_peer_scp_fqdn="scp02.example.com",ocscp_peer_scp_instance_id="scp-inst-002",ocscp_locality="local"}

Table 5-308 ocscp_worker_egress_res_total

Field	Details
Description	Specifies the total number of egress 5G SBI responses from SCP-Worker, including service responses, notification responses, and health-check responses.
Type	Counter
Dimension	-
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_egress_res_total{applicationName="ocscp",microservice="scp-worker",ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local",vendor="Oracle"}

Table 5-309 ocscp_worker_ingress_req_total

Field	Details
Description	Specifies the total number of ingress 5G SBI requests at SCP, including 5G SBI service requests, notification requests, and SCP health check request messages.
Type	Counter
Dimension	-
Example usage to filter metric by dimension on the Grafana GUI	ocscp_worker_ingress_req_total{applicationName="ocscp", microservice="scp-worker", ocscp_fqdn="ocscp-scp-worker.scpsvc.svc.cluster.local", vendor="Oracle"}

Table 5-310 ocscp_worker_scp_originated_http_rx_res_total

Field	Details
Description	Pegged when SCP receives an HTTP response for an SCP-originated outbound HTTP request.
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type - ocscp_response_code - ocscp_response_code_class
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_scp_originated_http_rx_res_total{ocscp_nf_type="PCF"} - ocscp_worker_scp_originated_http_rx_res_total{ocscp_nf_service_type="npcf-smpolicycontrol"} - ocscp_worker_scp_originated_http_rx_res_total{ocscp_response_code="201"} - ocscp_worker_scp_originated_http_rx_res_total{ocscp_response_code_class="2"}

Table 5-311 ocscp_worker_scp_originated_http_tx_req_total

Field	Details
Description	Pegged when SCP itself originates and transmits an outbound HTTP request (that is, a request not directly received from a consumer NF).
Type	Counter
Dimension	- ocscp_nf_type - ocscp_nf_service_type
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_worker_scp_originated_http_tx_req_total{ocscp_nf_type="PCF"} - ocscp_worker_scp_originated_http_tx_req_total{ocscp_nf_service_type="npcf-smppolicycontrol"}

Table 5-312 ocscp_alternate_resolution_response_total

Field	Details
Description	Specifies the total number of responses for alternate resolution requests from SCPC-Alternate-Resolution. DNS SRV outputs can use values such as <code>SUCCESS</code> or <code>failure</code> . HTTP-based alternate resolution calls can use HTTP response codes.
Type	Counter
Dimension	- target - responseCodeClass - responseCode
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_alternate_resolution_response_total{target="_http._tcp.nrf1svc.scpsvc.svc.cluster.local",responseCodeClass="SUCCESS",responseCode="success"} - ocscp_alternate_resolution_response_total{target="_http._tcp.nrf1svc.scpsvc.svc.cluster.local",responseCodeClass="FAILURE",responseCode="failure"} - ocscp_alternate_resolution_response_total{target="audit",responseCodeClass="2xx",responseCode="200"} - ocscp_alternate_resolution_response_total{target="audit",responseCodeClass="NO_RESPONSE",responseCode="NO_RESPONSE"}

Table 5-313 ocscp_alternate_resolution_request_total

Field	Details
Description	Specifies the total number of alternate resolution requests from SCPC-Alternate-Resolution. For DNS SRV resolution, <code>target</code> specifies the service proto name. For audit-triggered alternate resolution, <code>target</code> specifies the audit service target.
Type	Counter
Dimension	target
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_alternate_resolution_request_total{target="_http._tcp.nrf1svc.scpsvc.svc.cluster.local"} - ocscp_alternate_resolution_request_total{target="audit"}

Table 5-314 ocscp_subscription_responses_total

Field	Details
Description	Indicates the total number of responses received for outgoing subscription-related requests from SCPC-Subscription.
Type	Counter

Table 5-314 (Cont.) ocscp_subscription_responses_total

Field	Details
Dimension	- nfType - responseCodeClass - responseCode
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_subscription_responses_total{nfType="UDM",responseCodeClass="2xx",responseCode="201"} - ocscp_subscription_responses_total{nfType="UDM",responseCodeClass="2xx",responseCode="204"} - ocscp_subscription_responses_total{nfType="NRF",responseCodeClass="2xx",responseCode="201"} - ocscp_subscription_responses_total{nfType="NRF",responseCodeClass="2xx",responseCode="200"} - ocscp_subscription_responses_total{nfType="UDM",responseCodeClass="NO_RESPONSE",responseCode="NO_RESPONSE"}

Table 5-315 ocscp_subscription_requests_total

Field	Details
Description	Specifies the total number of outgoing subscription-related requests from SCPC-Subscription, including subscription, resubscription/renewal, unsubscription, NRF registration, and NRF heartbeat request attempts that peg this metric.
Type	Counter
Dimension	nfType
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_subscription_requests_total{nfType="UDM"} - ocscp_subscription_requests_total{nfType="NRF"}

Table 5-316 ocscp_audit_response_total

Field	Details
Description	Indicates the total number of responses received for outgoing audit requests from SCPC-Audit.
Type	Counter
Dimension	- target - responseCodeClass - responseCode
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_audit_response_total{target="NRF",responseCodeClass="2xx",responseCode="200"} - ocscp_audit_response_total{target="NRF",responseCodeClass="4xx",responseCode="404"} - ocscp_audit_response_total{target="NRF",responseCodeClass="NO_RESPONSE",responseCode="NO_RESPONSE"}

Table 5-317 ocscp_audit_request_total

Field	Details
Description	Specifies the total number of outgoing audit requests from SCPC-Audit.
Type	Counter

Table 5-317 (Cont.) ocscp_audit_request_total

Field	Details
Dimension	target
Example usage to filter metric by dimension on the Grafana GUI	ocscp_audit_request_total{target="NRF"}

Table 5-318 ocscp_notification_rule_sync_processing_time_total

Field	Details
Description	Indicates the time that SCPC-Notification requires to prepare a response to each worker rule synchronization data request, grouped into time buckets.
Type	Counter
Dimension	processingTimeInMs
Example usage to filter metric by dimension on the Grafana GUI	- ocscp_notification_rule_sync_processing_time_total{applicationName="ocscp",ocscp_fqdn="ocscp-scp-worker.scpsvc-ns.svc.cluster.local",processingTimeInMs="1ms"} 79850.0 - ocscp_notification_rule_sync_processing_time_total{applicationName="ocscp",ocscp_fqdn="ocscp-scp-worker.scpsvc-ns.svc.cluster.local",processingTimeInMs="2ms"} 9.0

Table 5-319 ocscp_audit_db_connection_success_total

Field	Details
Description	Counts new database TLS connections created by SCPC-Audit. It is pegged once for a newly observed DB connection and records the negotiated TLS version and cipher when available.
Type	Counter
Dimension	- tls_version - cipher
Example usage to filter metric by dimension on the Grafana GUI	ocscp_audit_db_connection_success_total{tls_version="Ssl_version: TLSv1.3", cipher="Ssl_cipher: TLS_AES_256_GCM_SHA384"}

Table 5-320 ocscp_subscription_db_connection_success_total

Field	Details
Description	Counts new database TLS connections created by SCPC-Subscription. It is pegged once for a newly observed DB connection and records the negotiated TLS version and cipher when available.
Type	Counter
Dimension	- tls_version - cipher
Example usage to filter metric by dimension on the Grafana GUI	ocscp_subscription_db_connection_success_total{tls_version="Ssl_version: TLSv1.3", cipher="Ssl_cipher: TLS_AES_256_GCM_SHA384"}

Table 5-321 ocsdp_notification_db_connection_success_total

Field	Details
Description	Counts new database TLS connections created by SCPC-Notification. It is pegged once for a newly observed DB connection and records the negotiated TLS version and cipher when available.
Type	Counter
Dimension	- tls_version - cipher
Example usage to filter metric by dimension on the Grafana GUI	ocsdp_notification_db_connection_success_total{tls_version="Ssl_version: TLSv1.3", cipher="Ssl_cipher: TLS_AES_256_GCM_SHA384"}

Table 5-322 ocsdp_configuration_db_connection_success_total

Field	Details
Description	Counts new database TLS connections created by SCPC-Configuration. It is pegged once for a newly observed DB connection and records the negotiated TLS version and cipher when available.
Type	Counter
Dimension	- tls_version - cipher
Example usage to filter metric by dimension on the Grafana GUI	ocsdp_configuration_db_connection_success_total{tls_version="Ssl_version: TLSv1.3", cipher="Ssl_cipher: TLS_AES_256_GCM_SHA384"}

Table 5-323 ocsdp_alterate_resolution_db_connection_success_total

Field	Details
Description	Counts new database TLS connections created by SCPC-Alternate-Resolution. It is pegged once for a newly observed DB connection and records the negotiated TLS version and cipher when available.
Type	Counter
Dimension	- tls_version - cipher
Example usage to filter metric by dimension on the Grafana GUI	ocsdp_alterate_resolution_db_connection_success_total{tls_version="Ssl_version: TLSv1.3", cipher="Ssl_cipher: TLS_AES_256_GCM_SHA384"}

Table 5-324 ocsdp_alterate_resolution_db_connection_failure_total

Field	Details
Description	Counts database TLS connection failures for SCPC-Alternate-Resolution. It is pegged when creating a DB connection fails because of TLS or certificate problems, grouped by failure reason and TLS version when available.
Type	Counter
Dimension	- reason - tls_version
Example usage to filter metric by dimension on the Grafana GUI	ocsdp_alterate_resolution_db_connection_failure_total{reason="cert_expired", tls_version="TLSv1.3"}

Table 5-325 ocscp_configuration_db_connection_failure_total

Field	Details
Description	Counts database TLS connection failures for SCPC-Configuration. It is pegged when creating a DB connection fails because of TLS or certificate problems, grouped by failure reason and TLS version when available.
Type	Counter
Dimension	- reason - tls_version
Example usage to filter metric by dimension on the Grafana GUI	ocscp_configuration_db_connection_failure_total{reason="cert_expired", tls_version="TLSv1.3"}

Table 5-326 ocscp_notification_db_connection_failure_total

Field	Details
Description	Counts database TLS connection failures for SCPC-Notification. It is pegged when creating a DB connection fails because of TLS or certificate problems, grouped by failure reason and TLS version when available.
Type	Counter
Dimension	- reason - tls_version
Example usage to filter metric by dimension on the Grafana GUI	ocscp_notification_db_connection_failure_total{reason="cert_expired", tls_version="TLSv1.3"}

Table 5-327 ocscp_subscription_db_connection_failure_total

Field	Details
Description	Counts database TLS connection failures for SCPC-Subscription. It is pegged when creating a DB connection fails because of TLS or certificate problems, grouped by failure reason and TLS version when available.
Type	Counter
Dimension	- reason - tls_version
Example usage to filter metric by dimension on the Grafana GUI	ocscp_subscription_db_connection_failure_total{reason="cert_expired", tls_version="TLSv1.3"}

Table 5-328 ocscp_audit_db_connection_failure_total

Field	Details
Description	Counts database TLS connection failures for SCPC-Audit. It is pegged when creating a DB connection fails because of TLS or certificate problems, grouped by failure reason and TLS version when available.
Type	Counter
Dimension	- reason - tls_version
Example usage to filter metric by dimension on the Grafana GUI	ocscp_audit_db_connection_failure_total{reason="cert_expired", tls_version="TLSv1.3"}

5.2.2 Mediation Metrics

The following table describes metric supported by the Mediation feature:

Table 5-329 ocscp_med_total_rule_count

Field	Details
Description	Total number of Mediation rules configured.
Type	Counter
Dimension	- app (nf-mediation,ocscp_med_active_rule_count_totalnf-mediation-test, iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace
Example usage to filter metric by dimension on the Grafana GUI	ocscp_med_total_rule_count{app= "nf-mediation",vendor="oracle"}

Table 5-330 ocscp_med_active_rule_count

Field	Details
Description	Total number of rules executed when a rule match is found for a particular message.
Type	Counter
Dimension	- app (nf-mediation,nf-mediation-test, iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace
Example usage to filter metric by dimension on the Grafana GUI	ocscp_med_active_rule_count_total{app="nf-mediation",vendor="oracle"}

Table 5-331 ocscp_med_individual_rule_exec_count_total

Field	Details
Description	Total number of times a particular rule gets invoked.
Type	Counter
Dimension	- app (nf-mediation,nf-mediation-test, iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace - ruleName - ruleGroupName
Example usage to filter metric by dimension on the Grafana GUI	sum(ocscp_med_individual_rule_exec_count_total{app="nf-mediation"}) by (ruleName,ruleGroupName)

Table 5-332 ocscp_med_http_req_total

Field	Details
Description	Total number of ingress messages to NF.

Table 5-332 (Cont.) ocscp_med_http_req_total

Field	Details
Type	Counter
Dimension	• app (nf-mediation, iwf-mediation) • vendor • kubernetes_namespace / namespace • ruleGroupName • msgType (request, response)
Example usage to filter metric by dimension on the Grafana GUI	<code>ocscp_med_req_total{msgType="request",app="nf-mediation",ruleGroupName="scp-agenda"}</code>

Table 5-333 ocscp_med_http_rsp_total

Field	Details
Description	Total number of egress messages.
Type	Counter
Dimension	• app (nf-mediation, iwf-mediation) • vendor • kubernetes_namespace / namespace • ruleGroupName • statusCode (supports specific codes:: 200, 500, 503) • msgType (request, response)
Example usage to filter metric by dimension on the Grafana GUI	<code>ocscp_med_rsp_total{msgType="request",ruleGroupName="scp-agenda",statusCode~="2.*"}</code>

Table 5-334 ocscp_med_test_req_total

Field	Details
Description	Total number of incoming messages to the NF Test mode.
Type	Counter
Dimension	• app (nf-mediation-test, iwf-mediation-test) • vendor • kubernetes_namespace / namespace • ruleGroupName • msgType (request, response)
Example usage to filter metric by dimension on the Grafana GUI	<code>ocscp_med_test_req_total{msgType="request",app="nf-mediation-test",ruleGroupName="scp-agenda"}</code>

Table 5-335 ocscp_med_test_rsp_total

Field	Details
Description	Total number of response by the Test mode.
Type	Counter

Table 5-335 (Cont.) ocscp_med_test_rsp_total

Field	Details
Dimension	- app (nf-mediation,nf-mediation-test, iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace - ruleGroupName - statusCode (supports specific codes:: 200, 500, 503) - msgType (request, response)
Example usage to filter metric by dimension on the Grafana GUI	ocscp_med_test_rsp_total{msgType="request"}

Table 5-336 ocscp_med_msg_forwarded_to_test_mode_total

Field	Details
Description	Total Number of Requests forwarded to Test mode
Type	Counter
Dimension	app(nf-mediation, iwf-mediation)
Example usage to filter metric by dimension on the Grafana GUI	sum(ocscp_med_msg_forwarded_to_test_mode_total)

Table 5-337 ocscp_med_rule_update_status

Field	Details
Description	If rules reloading failed or successful. Value = 0 {failed} Value = 1 {successful}
Type	Gauge
Dimension	- app (nf-mediation, nf-mediation-test, iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace
Example usage to filter metric by dimension on the Grafana GUI	ocscp_med_rule_update_status{app="nf-mediation"}

Table 5-338 ocscp_med_individual_rule_processing_time_seconds

Field	Details
Description	Processing time of the every rule invoked.
Type	Histogram

Table 5-338 (Cont.) ocscp_med_individual_rule_processing_time_seconds

Field	Details
Dimension	- app (nf-mediation, nf-mediation-test, iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace - ruleName - ruleGroupName - quantile quantile: A quantile in histogram metrics is a statistical measure that estimates the value below which a given percentage of observations fall, based on the distribution of data across predefined buckets.
Example usage to filter metric by dimension on the Grafana GUI	-

Table 5-339 ocscp_med_msg_processing_time_seconds

Field	Details
Description	Processing time of messages received by Mediation.
Type	Histogram
Dimension	- app (nf-mediation, nf-mediation-test, iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace - statusCode - quantile quantile: A quantile in histogram metrics is a statistical measure that estimates the value below which a given percentage of observations fall, based on the distribution of data across predefined buckets. statusCode: The response code for the transactions
Example usage to filter metric by dimension on the Grafana GUI	-

Table 5-340 ocscp_med_forward_to_ext_total

Field	Details
Description	Total number of messages forwarded to external.
Type	Counter
Dimension	- app (iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace
Example usage to filter metric by dimension on the Grafana GUI	-

Table 5-341 ocscp_med_incoming_rsp_from_ext_total

Field	Details
Description	Total number of responses from external.
Type	Counter
Dimension	- app (iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace
Example usage to filter metric by dimension on the Grafana GUI	-

Table 5-342 ocscp_med_incoming_d2h_req_total

Field	Details
Description	Total number of requests from D2H service as a part of the protocol translation mode.
Type	Counter
Dimension	- app (iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace
Example usage to filter metric by dimension on the Grafana GUI	-

Table 5-343 ocscp_med_outgoing_rsp_to_d2h_total

Field	Details
Description	Total number of responses to D2H service as a part of protocol translation mode.
Type	Counter
Dimension	- app (iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace
Example usage to filter metric by dimension on the Grafana GUI	-

Table 5-344 ocscp_med_forward_to_h2d_total

Field	Details
Description	Total number of messages forwarded to H2D as a part of protocol translation mode.
Type	Counter
Dimension	- app (iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace
Example usage to filter metric by dimension on the Grafana GUI	-

Table 5-345 ocscp_med_incoming_rsp_from_h2d_total

Field	Details
Description	Total number of responses received from H2D as a part of protocol translation as a service.
Type	Counter
Dimension	- app (iwf-mediation, iwf-mediation-test) - vendor - kubernetes_namespace / namespace
Example usage to filter metric by dimension on the Grafana GUI	-

Table 5-346 ocscp_med_udv_storage_failure_total

Field	Details
Description	This metric tracks the total number of write operation failures encountered for a user-defined variable when a mediation rule is invoked during a transaction. Condition: The metric is incremented whenever a failure or exception occurs during write operations such as put, add, set, or del.
Type	Counter
Dimension	- app ("ocscp-scp-mediation", "ocscp-scp-mediation-test") - vendor - kubernetes_namespace / namespace - userDefinedVariable - triggerPoint - operation
Example usage to filter metric by dimension on the Grafana GUI	<code>ocscp_med_udv_storage_failure_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", userDefinedVariable="user-imsi", triggerPoint="requestIngress", operation="set"}</code>

Table 5-347 ocscp_med_udv_read_failure_total

Field	Details
Description	This metric represents the total number of read operation failures that occur for a user-defined variable when a mediation rule is invoked for a transaction. Condition: This metric is pegged if any failure or exception occurs during read operations, such as the get operation.
Type	Counter
Dimension	- app ("ocscp-scp-mediation", "ocscp-scp-mediation-test") - vendor - kubernetes_namespace / namespace - userDefinedVariable - triggerPoint - operation

Table 5-347 (Cont.) ocscp_med_udv_read_failure_total

Field	Details
Example usage to filter metric by dimension on the Grafana GUI	ocscp_med_udv_read_failure_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", userDefinedVariable="user-imsi", triggerPoint="requestIngress", operation="has"}

Table 5-348 ocscp_med_udv_used_total

Field	Details
Description	This metric represents the total number of transactions in which a Write or Delete operation was performed on user-defined variables. Condition: This metric is pegged whenever a write or delete operation occurs for a transaction.
Type	Counter
Dimension	• app ("ocscp-scp-mediation","ocscp-scp-mediation-test") • vendor • kubernetes_namespace / namespace • triggerPoint • operation
Example usage to filter metric by dimension on the Grafana GUI	ocscp_med_udv_used_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", triggerPoint="requestIngress", operation="WRITE"}

Table 5-349 ocscp_med_udv_size_mismatch_total

Field	Details
Description	This metric represents the total number of times the size of the value assigned to a user-defined variable exceeds the configured size. Condition: This metric is pegged whenever the size of the value assigned to a user-defined variable exceeds the configured size limit.
Type	Counter
Dimension	• app ("ocscp-scp-mediation","ocscp-scp-mediation-test") • vendor • kubernetes_namespace / namespace • userDefinedVariable
Example usage to filter metric by dimension on the Grafana GUI	ocscp_med_udv_size_mismatch_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", userDefinedVariable="user-imsi"}

Table 5-350 ocscp_med_udv_type_mismatch_total

Field	Details
Description	This metric represents the total number of times the type of the value assigned to a user-defined variable differs from the configured data type. Condition: This metric is pegged whenever the type of the value assigned to a user-defined variable does not match the configured data type.
Type	Counter
Dimension	• app ("ocscp-scp-mediation","ocscp-scp-mediation-test") • vendor • kubernetes_namespace / namespace • userDefinedVariable
Example usage to filter metric by dimension on the Grafana GUI	<code>ocscp_med_udv_type_mismatch_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", userDefinedVariable="user-imsi"}</code>

Table 5-351 ocscp_med_udv_not_configured_total

Field	Details
Description	This metric represents the total number of times a user-defined variable is used in a mediation rule without being configured. Condition: This metric is pegged whenever a user-defined variable that is not configured is still used in a mediation rule.
Type	Counter
Dimension	• app ("ocscp-scp-mediation","ocscp-scp-mediation-test") • vendor • kubernetes_namespace / namespace • userDefinedVariable • triggerPoint
Example usage to filter metric by dimension on the Grafana GUI	<code>ocscp_med_udv_not_configured_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", triggerPoint="requestIngress", userDefinedVariable="user-imsi"}</code>

Table 5-352 ocscp_med_udvs_max_size_limit_exceeded_total

Field	Details
Description	This metric represents the total number of times the combined size of all user-defined variables and their values exceeds the configured size limit. Condition: This metric is pegged whenever the total size of all user-defined variables and their values exceeds the configured size.
Type	Counter

Table 5-352 (Cont.) ocscp_med_udvs_max_size_limit_exceeded_total

Field	Details
Dimension	• app ("ocscp-scp-mediation","ocscp-scp-mediation-test") • vendor • kubernetes_namespace / namespace • triggerPoint
Example usage to filter metric by dimension on the Grafana GUI	<code>ocscp_med_udvs_max_size_limit_exceeded_total{app="ocscp-scp-mediation", vendor="oracle", kubernetes_namespace="medsvc", triggerPoint="requestIngress"}</code>

6

Alerts

This section provides information about the supported alerts and how to configure the alerts.

Note

The performance and capacity of the SCP system may vary based on the call model, feature or interface configuration, network conditions, and underlying CNE and hardware environment.

You can configure alerts in Prometheus and ScpAlertrules.yaml file.

The following table describes the various severity types of alerts generated by SCP:

Table 6-1 Alerts Levels or Severity Types

Alerts Levels / Severity Types	Definition
Critical	Indicates a severe issue that poses a significant risk to safety, security, or operational integrity. It requires immediate response to address the situation and prevent serious consequences. Raised for conditions may affect the service of SCP.
Major	Indicates a more significant issue that has an impact on operations or poses a moderate risk. It requires prompt attention and action to mitigate potential escalation. Raised for conditions may affect the service of SCP.
Minor	Indicates a situation that is low in severity and does not pose an immediate risk to safety, security, or operations. It requires attention but does not demand urgent action. Raised for conditions may affect the service of SCP.
Info or Warn (Informational)	Provides general information or updates that are not related to immediate risks or actions. These alerts are for awareness and do not typically require any specific response. WARN and INFO alerts may not impact the service of SCP.

Caution

User, computer and applications, and character encoding settings may cause an issue when copy-pasting commands or any content from PDF. The PDF reader version also affects the copy-pasting functionality. It is recommended to verify the pasted content when the hyphens or any special characters are part of the copied content.

Note

- `kubectl` commands might vary based on the platform deployment. Replace `kubectl` with Kubernetes environment-specific command line tool to configure Kubernetes resources through kube-api server. The instructions provided in this document are as per the Oracle Communications Cloud Native Environment (OCCNE) version of kube-api server.
- The alert file can be customized as required by the deployment environment. For example, namespace can be added as a filtered criteria to the alert expression to filter alerts only for a specific namespace.

6.1 Configuring Alerts

This section describes how to configure alert rules for SCP in both Prometheus and OCI environments. It provides guidance on setting up measurement-based alert rules, where the alerting system evaluates metrics reported by SCP microservices against specified rule conditions to generate alerts as required.

Prometheus Alert Configuration

In a Prometheus environment, SCP alert rules are configured based on metrics reported by SCP components. The alerting workflow monitors these metrics and issues notifications when the defined conditions are met.

For more information about configuring SCP alerts in Prometheus, see the "Alert Configuration" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

OCI Alert Configuration

In OCI environments, SCP alert rules are defined using Metric Query Language (MQL). Configuring these alerts requires creating a dedicated SCP alert file for use with the OCI observability platform.

For more information about configuring SCP alerts in OCI, see the "Configuring SCP Alerts for OCI" section in *Oracle Communications Cloud Native Core, Service Communication Proxy Installation, Upgrade, and Fault Recovery Guide*.

6.2 System level alerts

This section lists the system level alerts.

6.2.1 SCPNotificationPodMemoryUsage

Table 6-2 SCPNotificationPodMemoryUsage

Field	Description
Description	Notify Notification service Pod memory usage if it is above threshold Threshold value is 85% of allocated (4GB) memory: 3.4 GB

Table 6-2 (Cont.) SCPNotificationPodMemoryUsage

Field	Description
Summary	Memory usage is above 85% for podname: {{labels.kubernetes_pod_name}}, instance: {{labels.instance}}, namespace: {{labels.kubernetes_namespace}} with current value {{ \$value }},scpfqdn: {{labels.ocscp_fqdn}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Major
Conditions	sum(container_memory_usage_bytes{image!="",pod=~".*scpc-notification.+"}) by (kubernetes_pod_name,kubernetes_namespace,instance) > 3650722201
OID	1.3.6.1.4.1.323.5.3.35.1.2.3001
Metric Used	ocscp_nrf_notifications_requests_nf_total
Recommended Actions	Cause: When high notification rate or very large NF profile size is present in notifications. Diagnostic Information: Monitor the notification metric: ocscp_nrf_notifications_requests_nf_total. Notification usage reduces after some time when it crosses 2.5 GB or 3 GB. Recovery: This alert is cleared automatically when the scpc-notification pod memory usage reduces below the defined threshold. Reduce the notification rate. These notifications are generated by NRF and can be controlled through NRF. For any assistance, contact My Oracle Support.

6.2.2 SCPWorkerPodMemoryUsage

Table 6-3 SCPWorkerPodMemoryUsage

Field	Description
Description	Notify Worker per Pod memory usage is above threshold Threshold value is 85% of allocated (16GB) memory: 13.6 GB
Summary	Memory usage is above 85% for podname: {{labels.kubernetes_pod_name}}, instance: {{labels.instance}}, namespace: {{labels.kubernetes_namespace}} with current value {{ \$value }},scpfqdn: {{labels.ocscp_fqdn}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	major
Conditions	sum(container_memory_usage_bytes{image!="",pod=~".*scp-worker.+"}) by (kubernetes_pod_name,kubernetes_namespace,instance) > 14602888806
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.7004
Metric Used	- ocscp_metric_http_rx_req_total - ocscp_metric_http_tx_req_total - ocscp_metric_http_rx_res_total - ocscp_metric_http_tx_res_total

Table 6-3 (Cont.) SCPWorkerPodMemoryUsage

Field	Description
Recommended Actions	Cause: When there is high traffic rate, alternate routing, more number of routing rules and rules size, and due to network or producer NF latency. Diagnostic Information: Monitor traffic rate, alerts, and latency on the KPI Dashboard. Check the traffic rates of the following metrics if they are too high: - ocscp_metric_http_rx_req_total - ocscp_metric_http_tx_req_total - ocscp_metric_http_rx_res_total - ocscp_metric_http_tx_res_total Check the upstream response time by using the following command and ensure whether upstream is taking too long to respond: ocscp_metric_upstream_service_time_total. Check the following platform metric for current memory usage by the scp-worker pod: container_memory_usage_bytes. Recovery: This alert is cleared automatically when the scp-worker pod memory usage reduces below the defined threshold. Reduce the traffic rate and improve the latency. For any assistance, contact My Oracle Support.

6.2.3 SCPIInstanceDown

Table 6-4 SCPIInstanceDown

Field	Description
Description	Notify that if any pod in ocscp release is down. Provides information like pod name, instance id and app name.
Summary	Pod with podname: {{\$labels.kubernetes_pod_name}} is Down , timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Critical
Conditions	kube_pod_status_ready{pod =~ '*scp-worker.*'.*scpc-notification.*'.*scpc-subscription.*'.*scpc-configuration.*'.*scpc-audit.*'.*scpc-nrfproxy.*'.*scpc-load-manager.*'.*scpc-cache.*'.*scpc-alternate-resolution.*'.*scpc-mediation.*',condition =~ 'true'} !=1
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.7006

Table 6-4 (Cont.) SCPIInstanceDown

Field	Description
Recommended Actions	Cause: When the following issues occur: - The Control plane pods, such as configuration, subscription, notification, audit, and alternate-resolution are down due to connection failure with DB. - Pod restarts due to kubernetes liveness or readiness probe failures. - Application restarts or starts failure. Diagnostic Information: - Check if DB services are active by running the following command: <pre>kubectl describe pod <podname> -n <namespace></pre> - Check kubernetes events for probe failures in the platform logs. - Check if any exception is reported in the SCP application logs. Recovery: This alert is cleared automatically when the inactive pod is active. Recover DB services if down. Collect the application logs and contact My Oracle Support for any assistance.

6.3 Application level alerts

This section lists the application level alerts.

6.3.1 SCPCcaFeatureEnabledWithoutHttps

Table 6-5 SCPCcaFeatureEnabledWithoutHttps

Field	Description
Severity	Info
Condition	ocscp_worker_cca_validation_feature_enabled_without_https > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.9022
Description	An alert is raised when the CCA validation feature is enabled without enabling HTTPS.
Recommended Actions	Cause: CCA validation feature is enabled without enabling HTTPS. Diagnostic Information: Deploy HTTPS SCP deployment. Recovery: The alert is cleared automatically if either the CCA feature is disabled or deployment is changed to HTTPS. For any assistance, contact My Oracle Support.

6.3.2 SCPIngressTrafficRateAboveMinorThreshold

Table 6-6 SCPIngressTrafficRateAboveMinorThreshold

Field	Details
Description	'Ingress Traffic Rate for ocscp_authority: "{{labels.ocscp_authority}}" is above minor threshold (i.e. 5600 mps)'
Summary	'namespace: {{labels.namespace}}, podname: {{labels.pod}}, scpfqdn: {{labels.ocscp_fqdn}}, scpauthority: {{labels.ocscp_authority}}, timestamp: {{ with query "time()" }} {{ . first value humanizeTimestamp }}{{ end }}: Current Ingress Traffic Rate is {{ \$value printf "%.2f" }} mps which is above 70 Percent of Max Ingress MPS(8000)'
Severity	minor
Condition	This alert notifies that the traffic rate is above 1200 MPS (user configure minor threshold value) with Locality and current value of traffic rate. sum(rate(ocscp_metric_http_rx_req_total{container="scp-worker"}[2m])) by (namespace,pod,ocscp_fqdn,ocscp_authority) >= 5600 < 6400
OID	1.3.6.1.4.1.323.5.3.35.1.2.7001
Metric Used	ocscp_metric_http_rx_req_total
Recommended Action	Cause: When a consumer NF sends more traffic than expected. Diagnostic Information: - Monitor ingress traffic to the pod using the KPI dashboard. - Refer to the rate of ocscp_metric_total_http_rx_req on the Grafana dashboard. Recovery: - The alert clears automatically when ingress traffic falls below the minor threshold or exceeds the major threshold. - If the alert does not clear, check the Consumer NF for uneven traffic distribution per connection or other abnormalities. - For any assistance, contact My Oracle Support.

Note

The alert expression is configured for the SCP profile (12 vCPUs and 16 Gi of memory). For a smaller resource profile (for example, 8 vCPUs and 12 Gi of memory), the per-worker pod MPS should be evaluated based on the dimensioning sheet, and the alert file must be updated accordingly.

6.3.3 SCPIngressTrafficRateAboveMajorThreshold

Table 6-7 SCPIngressTrafficRateAboveMajorThreshold

Field	Details
Description	'Ingress Traffic Rate for ocscp_authority: {{ \$labels.ocscp_authority }} is above major threshold (i.e. 6400 mps)'
Summary	'namespace: {{ \$labels.namespace }}, podname: {{ \$labels.pod }}, scpfqdn: {{ \$labels.ocscp_fqdn }}, scpauthority: {{ \$labels.ocscp_authority }}, timestamp: {{ with query "time()" }} {{ . first value humanizeTimestamp }}{{ end }}: Current Ingress Traffic Rate is {{ \$value printf "%.2f" }} mps which is above 80 Percent of Max Ingress MPS(8000)'
Severity	major
Condition	This alert notifies that the traffic rate is above 1400 MPS (user configure major threshold value) with Locality and current value of traffic rate. expr: sum(rate(ocscp_metric_http_rx_req_total{container="scp-worker"}[2m])) by (namespace,pod,ocscp_fqdn,ocscp_authority) >= 6400 < 7600
OID	1.3.6.1.4.1.323.5.3.35.1.2.7001
Metric Used	ocscp_metric_http_rx_req_total
Recommended Action	Cause: When a consumer NF sends more traffic than expected. Diagnostic Information: - Monitor ingress traffic to the pod using the KPI dashboard. - Refer to the rate of ocscp_metric_total_http_rx_req on the Grafana dashboard. Recovery: - The alert clears automatically when ingress traffic falls below the major threshold or exceeds the critical threshold. - If the alert does not clear, check the Consumer NF for uneven traffic distribution per connection or other abnormalities. - If the alert persists for an extended duration, lower ingress traffic from the Consumer NF to the pod. - For any assistance, contact My Oracle Support.

Note

The alert expression is configured for the SCP profile (12 vCPUs and 16 Gi of memory). For a smaller resource profile (for example, 8 vCPUs and 12 Gi of memory), the per-worker pod MPS should be evaluated based on the dimensioning sheet, and the alert file must be updated accordingly.

6.3.4 SCPIngressTrafficRateAboveCriticalThreshold

Table 6-8 SCPIngressTrafficRateAboveCriticalThreshold

Field	Details
Description	'Ingress Traffic Rate for ocscp_authority: {{ \$labels.ocscp_authority }} is above critical threshold (i.e. 7600 mps)'
Summary	'namespace: {{ \$labels.namespace }}, podname: {{ \$labels.pod }}, scpfqdn: {{ \$labels.ocscp_fqdn }}, scpauthority: {{ \$labels.ocscp_authority }}, timestamp: {{ with query "time()" }} {{ . first value humanizeTimestamp }}{{ end }}: Current Ingress Traffic Rate is {{ \$value printf "%.2f" }} mps which is above 95 Percent of Max Ingress MPS(8000)'
Severity	Critical
Condition	Notify that Traffic rate is above 1600mps (user configure critical threshold value) with Locality and current value of traffic rate. sum(rate(ocscp_metric_http_rx_req_total{container="scp-worker"}[2m])) by (namespace,pod,ocscp_fqdn,ocscp_authority) >= 7600
OID	1.3.6.1.4.1.323.5.3.35.1.2.7001
Metric Used	ocscp_metric_http_rx_req_total
Recommended Action	Cause: A Consumer NF sends more traffic than expected. Diagnostic Information: - Monitor ingress traffic to the pod using the KPI dashboard. - Refer to the rate of ocscp_metric_total_http_rx_req on the Grafana dashboard. Recovery: - The alert clears automatically when ingress traffic falls below the critical threshold. - If the alert does not clear, check the Consumer NF for uneven traffic distribution per connection or other abnormalities. - If the alert persists for an extended duration, lower ingress traffic from the Consumer NF to the pod. - For any assistance, contact My Oracle Support.

Note

The alert expression is configured for the SCP profile (12 vCPUs and 16 Gi of memory). For a smaller resource profile (for example, 8 vCPUs and 12 Gi of memory), the per-worker pod MPS should be evaluated based on the dimensioning sheet, and the alert file must be updated accordingly.

6.3.5 SCPRoutingFailedForProducer

Table 6-9 SCPRoutingFailedForProducer

Field	Details
Description	'Routing failed for nfclustername: {{ \$labels.ocscp_producer_host }}'
Summary	'Routing failed for producer with nfclustername: {{ \$labels.ocscp_producer_host }}, nfservicetype = {{ \$labels.ocscp_nf_service_type }}, scpauthority: {{ \$labels.ocscp_authority }}, nftype = {{ \$labels.ocscp_nf_type }}, nfendpoint = {{ \$labels.ocscp_nf_end_point }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scp_fqdn: ' {{ \$labels.scp_fqdn }}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }} and value = {{ \$value }} '
Severity	info
Condition	This alert notifies that routing failed for producer. It provides information about NFService Type, NFType, Locality, producer fqdn, and value. increase(ocscp_metric_routing_attempt_fail_total{app_kubernetes_io_name="scp-worker"}[2m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.7005
Metric Used	ocscp_metric_routing_attempt_fail_total
Recommended Action	Cause: When routing fails to select a producer NF because routing rules do not exist for the NF service or producer. Diagnostic Information: - Verify that routing rules are configured for the NF for which routing failed. - Check notification logs for errors that occur when processing notifications for the NF for which routing failed. Use the following command: <pre>kubectl logs <podname> -n <namespace></pre> - Verify that the NF is reachable by using one of the following methods: - Run the ping command from cluster nodes by using the Service IP address. For example, run ping <IPAddress>. - If the Service Fqdn is used, run the ping command from within the pod. - If the pod does not support the ping command, use the SCP pod debug container. - As an alternative to ping, collect tcpdump data to verify connectivity. For example, run tcpdump -w capture.pcap -i <pod interface>. - Refer to the Debug Container Guide for usage and sample commands. Recovery: - The alert clears automatically when routing succeeds for the producer NF or when no further traffic arrives during the next Prometheus scrape interval. - Verify that the NF is registered. Register the NF to create routing rules if the rules do not exist. - For any assistance, contact My Oracle Support.

6.3.6 SCPAuditErrorResponse

Table 6-10 SCPAuditErrorResponse

Field	Description
Severity	Info
Conditions	ocscp_audit_error_response > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.4001
Description	Alert is raised when Audit module receives a 3xx, 4xx, or 5xx error from NRF. This alert is labeled with specific nftype, nrfRegionOrSetId, and auditmethod. Note: Alert is cleared on the next audit cycle.
Recommended Actions	Cause: When the configured NRF sends error responses, down, or not reachable. Diagnostic Information: - Check if NRF is up and reachable. To check the NRF status, see <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>. - Check if the NF is reachable or not using one of the following steps: - Run the ping command from primary/secondary nodes using IP of NRF. Example of a ping command: <code>ping <IpAddress></code>. - Run the ping command from inside the pod if FQDN of NRF is used. - Instead of using ping, you can collect tcpdump for ensuring connectivity. Example of a tcpdump: <code>tcpdump -w capture.pcap -i <pod interface></code>. - Monitor audit and worker service logs: <code>kubectl logs <pod name> -n <namespace></code> - Check jaeger traces for scp-worker. Recovery: The alert is cleared automatically during the next audit cycle and when no more errors are received. Collect audit and worker service logs and contact My Oracle Support for any assistance.

6.3.7 SCPAuditEmptyNFArrayResponse

Table 6-11 SCPAuditEmptyNFArrayResponse

Field	Description
Description	Alert is generated when Audit module receives a 2xx response with empty NFInstance array from NRF. Alert is labeled with specific nftype, nrfRegionOrSetId, and auditmethod. Alert is cleared if Audit receives a success response with non-empty NFInstance array or on next audit cycle if topology source is changed to LOCAL.
Summary	SCP Audit received Empty NF Array Response for nftype {{ \$labels.nftype }}, nrfRegionOrSetId: {{ \$labels.nrfRegionOrSetId }}, auditmethod: {{ \$labels.auditmethod }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpfdqn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }}

Table 6-11 (Cont.) SCPAuditEmptyNFArrayResponse

Field	Description
Severity	Critical
Conditions	ocscp_audit_2xx_empty_nf_array > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.4002
Recommended Actions	Cause: When NRF does not have any NF registered or due to any error condition on NRF. Diagnostic Information: Check if NRF contains any registered NF and validate as required. For more information, refer to NRF documents. Recovery: This alert is cleared automatically if Audit receives a success response with non-empty NFInstance array or during the next audit cycle when the topology source is changed to LOCAL. Register a NF with NRF or change the topology source to LOCAL. For any assistance, contact My Oracle Support.

6.3.8 DuplicateLocalityFoundInForeignNF

Table 6-12 DuplicateLocalityFoundInForeignNF

Field	Details
Description	'Duplicate Locality found for Foreign NF'
Summary	'Duplicate locality for remote Region. namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpFqdn: ' {{ \$labels.scpFqdn }}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }} and value = {{ \$value }}'
Severity	Major
Condition	This alert is raised when a foreign SCP is registered with a duplicate locality from the current region.
OID	1.3.6.1.4.1.323.5.3.35.1.2.3002
Metric Used	ocscp_notification_duplicate_foreign_location

Table 6-12 (Cont.) DuplicateLocalityFoundInForeignNF

Field	Details
Recommended Action	Cause: When a foreign SCP profile is accepted, but its MateScpInfo localities overlap with the local SCP's serving or mate localities. Diagnostic Information: Check if ocscp_notification_duplicate_foreign_location = 1. Group by NF type: sum by (nfType) (ocscp_notification_duplicate_foreign_location) Determine a specific instance: ocscp_notification_duplicate_foreign_location{nfInstanceId="<id>"} Look for WARN: "Common Serving or Mate localities found between local SCP and foreign SCP" Look for pegging from pegInterScpMetrics in ForeignSCPRuleProcessorImp Verify the row for nfInstanceId has duplicateRemoteLocality=true (and the NF is foreign) Recovery: Ensure that the foreign SCP's serving and MateScpInfo localities do not overlap with the local SCP's serving or mate localities. Update the foreign SCP's profile and re-register it. After the profile is corrected and processed, the gauge automatically drops to 0 on the next REGISTERED event with no overlap (or clears on DEREGISTERED). For any assistance, contact My Oracle Support.

6.3.9 ForeignNFLocalityNotServed

Table 6-13 ForeignNFLocalityNotServed

Field	Description
Severity	Critical
Conditions	ocscp_notification_foreign_nf_locality_unserved > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.3003
Description	Alert is raised when a Foreign Producer NF's locality is not served by any SCP.

Table 6-13 (Cont.) ForeignNFLocalityNotServed

Field	Description
Recommended Actions	Cause: When SCP discovers an unknown Producer NF's without any locality served by an SCP. Diagnostic Information: Check logs for received NF notification by running the following command: <code>kubectl get pods -n <namespace></code>. Note: Use the complete name of notification pod in the following command: <code>kubectl logs <pod> -n <namespace></code>. Check the following metric to get the NFInstanceId information for which this alert is raised: <code>ocscp_notification_foreign_nf_locality_unserved(nfInstanceId)</code>. Recovery: This alert is cleared automatically if the unknown NF is deregistered or registers update received with locality served by SCP. Re-register NF with correct locality information. For any assistance, contact My Oracle Support.

6.3.10 UnknownLocalityFoundInForeignNF

Table 6-14 UnknownLocalityFoundInForeignNF

Field	Description
Severity	critical
Conditions	<code>ocscp_notification_foreign_nf_locality_absent > 0</code>
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.3004
Description	Alert will be raised when a Foreign Producer NF's locality is unknown.
Recommended Actions	Cause: When SCP discovers an unknown Producer NF's without locality information. Diagnostic Information: Check logs for the received NF notification by running the following command: <code>kubectl get pods -n <namespace></code>. Use the complete name of notification pod in the following command: <code>kubectl logs <pod> -n <namespace> -f --tail=0</code> Check the following metric to get the NFInstanceId information for which this alert is raised: <code>ocscp_notification_foreign_nf_locality_absent(nfInstanceId)</code>. Recovery: This alert is cleared automatically if unknown NF is deregistered or registers update received with locality known to SCP. Re-register NF with correct locality information. For any assistance, contact My Oracle Support.

6.3.11 SCPUpsstreamResponseTimeout

Table 6-15 SCPUpsstreamResponseTimeout

Field	Description
Description	Alert is raised when Upstream connection to a producer NF fails

Table 6-15 (Cont.) SCPUstreamResponseTimeout

Field	Description
Summary	SCP SUstream Response Timeout for nfservicetype: <code>{{labels.ocscp_nf_service_type}}</code> , nftype <code>{{labels.ocscp_nf_type}}</code> , responsecode <code>{{labels.ocscp_response_code}}</code> , nfclustername <code>{{labels.ocscp_producer_host}}</code> , namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , timestamp: <code>{{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}</code>
Severity	info
Conditions	<code>increase(ocscp_metric_upstream_response_timeout_total[2m]) > 0</code>
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.7011
Recommended Actions	Cause: When a producer NF is down, not reachable, or latency is high. Diagnostic Information: Check whether the producer NF is up and network connectivity to the producer NF is established by using one of the following steps: - Run the ping command from primary/secondary nodes by using IP of producer NF. Example of a ping command: <code>ping <IPAddress></code>. - Run the ping command from inside the pod, if FQDN of producer NF is used. - Instead of using the ping command, you can collect tcpdump for ensuring the connectivity. tcpdump must be run on the debug container for scp-worker microservice. Example of a tcpdump: <code>tcpdump -w capture.pcap -i <pod interface></code>. Check the upstream response time by using the following metric and determine if upstream is taking too long to respond: <code>ocscp_metric_upstream_service_time</code> (producer FQDN) Recovery: This alert is cleared automatically in the next scrape interval if the system does not observe any error. For any assistance, contact My Oracle Support.

6.3.12 SCPSingleNfInstanceAvailableForNFType

Table 6-16 SCPSingleNfInstanceAvailableForNFType

Field	Description
Severity	Major
Conditions	<code>ocscp_no_nf_instance == 0</code>
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.3005
Description	Alert is raised when there is a single NFInstance available with SCP for an NFType.

Table 6-16 (Cont.) SCPSingleNFInstanceAvailableForNFType

Field	Description
Recommended Actions	Cause: When the preventiveAuditOnLastNFInstanceDeletion attribute is set to true, SCP has single NFInstance available for an NFType. Diagnostic Information: Check all SCP NRFs for specific NFType in the alert if only one NFInstance is available. For information about registered NFs, see <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>. Check the number of NFs of a particular type by using API or CNC console of SCP. For information about procedures to check the NFs available with SCP, see "Configuring Service Communication Proxy using the CNC Console" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy User Guide</i>. Recovery: This alert is cleared automatically in the next scrape interval if more than one NFInstance is available for a specified NFType in the alert. For any assistance, contact My Oracle Support.

6.3.13 SCPNoNFInstanceForNFType

Table 6-17 SCPNoNFInstanceForNFType

Field	Description
Severity	Critical
Conditions	ocscp_no_nf_instance == 1
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.3006
Description	Alert is raised when there is no NFInstance available with SCP for an NFType
Recommended Actions	Cause: When the preventiveAuditOnLastNFInstanceDeletion flag is set to true, SCP has no NFInstance available for a NFType. Diagnostic Information: Check all SCP NRFs for specific NFType in the alert if no NFInstance is available. For information about registered NFs, see <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>. Check the number of NFs of a particular type by using API or CNC console of SCP. For information about procedures to check the NFs available with SCP, see "Configuring Service Communication Proxy using the CNC Console" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy User Guide</i>. Recovery: This alert is cleared automatically in the next scrape interval if at least one NFInstance is available for a specified NFType in the alert. For any assistance, contact My Oracle Support.

6.3.14 SCPIngressTrafficRateExceededConfiguredLimit

Table 6-18 SCPIngressTrafficRateExceededConfiguredLimit

Alert Parameters	Value
Description	Ingress traffic rate exceeds configured rate limit for consumer fqdn: <code>{{labels.ocscp_consumer_fqdn}}</code>
Summary	'Ingress traffic rate exceeds configured rate limit for consumer fqdn: ocscpconsumerfqdn = <code>{{labels.ocscp_consumer_host}}</code> , consumernfinstanceid = <code>{{labels.ocscp_consumer_nf_instance_id}}</code> , consumernftype = <code>{{labels.ocscp_consumer_nf_type}}</code> , configuredingressrate = <code>{{labels.ocscp_configured_ingress_rate}}</code> , namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , scp_fqdn: ' <code>{{labels.scp_fqdn}}</code> ', timestamp: <code>{{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }}</code> and value = <code>{{ \$value }}</code> '
Severity	Critical
Condition	This alert is raised when the ingress traffic rate exceeds the configured rate for consumer FQDN. <code>increase(ocscp_metric_ingress_rate_limiting_throttle_req_total[2m]) > 0</code>
OID	1.3.6.1.4.1.323.5.3.35.1.2.7012
Metric Used	ocscp_metric_ingress_rate_limiting_throttle_req_total
Recommended Actions	Cause: When the ingress traffic rate exceeds the configured rate limit for the consumer FQDN. Diagnostic Information: - Check the ingress traffic rate from the consumer FQDN. - To check the ingress rate, refer to the following metrics: <code>cscp_metric_http_rx_req_total</code> - Check the ingress rate limit configuration as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. Recovery: This alert is cleared when no more requests get suppressed due to ingress rate limiting in the next scrape interval. For any assistance, contact My Oracle Support.

6.3.15 SCPIngressTrafficRoutedWithoutRateLimitTreatment

Table 6-19 SCPIngressTrafficRoutedWithoutRateLimitTreatment

Alert Parameters	Value
Description	Ingress traffic routed without rate limit treatment
Summary	'Ingress traffic routed without rate limit treatment: consumernftype = <code>{{labels.ocscp_consumer_nf_type}}</code> , consumernfinstanceid = <code>{{labels.ocscp_consumer_nf_instance_id}}</code> , consumerfqdn = <code>{{labels.ocscp_consumer_host}}</code> , cause = <code>{{labels.ocscp_cause}}</code> , namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , scp_fqdn: ' <code>{{labels.scp_fqdn}}</code> ', timestamp: <code>{{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }}</code> and value = <code>{{ \$value }}</code> '
Severity	Major

Table 6-19 (Cont.) SCPIngressTrafficRoutedWithoutRateLimitTreatment

Alert Parameters	Value
Condition	This alert is raised when the ingress traffic routes without rate limiting treatment. increase(ocscp_metric_ingress_rate_limiting_not_applied_req_total[2m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.7013
Metric Used	ocscp_metric_ingress_rate_limiting_not_applied_req_total
Recommended Actions	Cause: When the ingress traffic routes without rate limiting treatment. Diagnostic Information: - Check the ingress rate limiting configurations for the untreated FQDNs that can be obtained from the following metric: ocscp_metric_ingress_rate_limiting_not_applied_req_total(ocscp_consumer_fqdn) - Check the ingress rate limit configuration as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. Recovery: This alert is cleared when no more requests get routed without ingress rate limiting treatment in the next scrape interval. For any assistance, contact My Oracle Support.

6.3.16 SCPEgressTrafficRateExceededConfiguredLimit

Table 6-20 SCPEgressTrafficRateExceededConfiguredLimit

Field	Details
Description	'Egress traffic rate exceeds configured rate limit'
Summary	'Egress traffic rate exceeds configured rate limit: producernfstype = {{\$labels.ocscp_nf_type}}, producernfserVICetype = {{\$labels.ocscp_nf_service_type}}, producerfqdn = {{\$labels.ocscp_producer_host}}, configuredegressrate = {{\$labels.ocscp_configured_egress_rate}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, scp_fqdn: ' {{\$labels.scp_fqdn}} ', timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }} and value = {{ \$value }} '
Severity	critical
Condition	This alert is raised when the egress traffic rate exceeds the configured rate. increase(ocscp_metric_egress_rate_limiting_throttle_req_total{app_kubernetes_io_name="scp-worker"}[2m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.7014
Metric Used	ocscp_metric_egress_rate_limiting_throttle_req_total

Table 6-20 (Cont.) SCPEgressTrafficRateExceededConfiguredLimit

Field	Details
Recommended Action	Cause: When the egress traffic rate exceeds the configured rate. Diagnostic Information: - Check Egress Traffic Rate by using <code>ocscp_metric_total_http_tx_req</code>. - Check the egress rate limit configuration. - Refer to the SCP User Guide for steps to check the rate limit configuration. Recovery: - The alert clears automatically when no further requests are throttled because of egress rate limiting during the next scrape interval. - For any assistance, contact My Oracle Support.

6.3.17 SCPEgressTrafficRoutedWithoutRateLimitTreatment

Table 6-21 SCPEgressTrafficRoutedWithoutRateLimitTreatment

Field	Description
Description	Alert is raised when egress traffic routes without rate limiting.
Summary	Egress traffic routed without rate limiting: <code>producernfstype = {{ \$labels.ocscp_nf_type }}</code> , <code>producernfservicetype = {{ \$labels.ocscp_nf_service_type }}</code> , <code>producernfinstanceid = {{ \$labels.ocscp_nf_instance_id }}</code> , <code>producerfqdn = {{ \$labels.ocscp_producer_host }}</code> , <code>cause = {{ \$labels.ocscp_cause }}</code> , <code>namespace: {{ \$labels.kubernetes_namespace }}</code> , <code>podname: {{ \$labels.kubernetes_pod_name }}</code> , <code>scpfqdn: {{ \$labels.ocscp_fqdn }}</code> , <code>timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}</code> and <code>value = {{ \$value }}</code>
Severity	Major
Conditions	<code>increase(ocscp_metric_egress_rate_limiting_not_applied_req_total{app_kubernetes_io_name="scp-worker"}[2m]) > 0</code>
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.7015
Recommended Actions	Cause: When the egress traffic routes without rate limiting treatment. Diagnostic Information: Check the egress rate limiting configurations for the untreated producer FQDN. Obtain the producer FQDN by using the following metric: <code>ocscp_metric_egress_rate_limiting_not_applied_req_total(ocscp_producer_fqdn)</code> Check the egress rate limit configuration as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. Recovery: This alert is cleared when no more requests get routed without egress rate limiting treatment in the next scrape interval. For any assistance, contact My Oracle Support.

6.3.18 SCPNotificationRejectTopologySourceLocal

Table 6-22 SCPNotificationRejectTopologySourceLocal

Field	Description
Severity	Info
Conditions	increase(ocscp_notifications_rejected_topologysource_local_total[15m]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.3007
Description	Alert is raised when SCP rejects a notification from NRF due to topology source set to LOCAL for NF Type.
Recommended Actions	Cause: When NF Topology Source Info is set to LOCAL. Diagnostic Information: Check the topology source information of an NF Type. For information about the topology source APIs, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy User Guide</i>. Recovery: This alert is cleared automatically after 15 minutes when NF Topology Source Info is set to NRF from LOCAL. For any assistance, contact My Oracle Support.

6.3.19 SCPNotificationProcessingFailureForNF

Table 6-23 SCPNotificationProcessingFailureForNF

Field	Description
Description	Alerts is raised when Notification processing has failed on SCP.
Summary	SCP Notification Processing failure for nfInstanceId: {{ \$labels.nfInstanceId }}, nfType: {{ \$labels.nfType }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpfqdn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Major
Conditions	increase(ocscp_notification_nf_profile_processing_failure_total[15m]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.3008

Table 6-23 (Cont.) SCPNotificationProcessingFailureForNF

Field	Description
Recommended Actions	Cause: When Notification processing has failed on SCP. Diagnostic Information: Check notification pod logs for any errors by running the following command: <pre>kubectl logs <notification pod name> -n <scp namespace></pre> To get the list of pods, run the following command: <pre>kubectl get pod -n <scp namespace></pre> Sample logs: <pre>{ "instant": { "epochSecond":1620272241,"nanoOfSecond":609935406}, "thread":"runQueueThreadPool1","level":"ERROR","loggerName":"com.oracle.cgbu.cne.scp.soothsayer.Process","message":"{logMsg=Notified profile IP endpoints already present in stored profile, logMsgCode=DUPLICATE_IPENDPOINT_OR_FQDN_FOUND_IN_STORED_PROFILE, rootCause=Notified Profile contains an ipEndPoint {\\"ipv4Address\\":\\"10.75.203.74\\",\\"transport\\":\\"TCP\\",\\"port\\":32673} which is already present in stored Profile with nfInstanceId 93ED74AA-A29C-4450-9D7A-9278CAF6266D for serviceInstanceId audmcl08nv08-udmueauthn-589d6d5bcc-4dslh}", "endOfBatch":false, "loggerFqcn":"org.apache.logging.log4j.spi.AbstractLogger", "threadId":34, "threadPriority":5, "messageTimestamp":"21-05-06 03:37:21.609+0000", "application":"ocscp-soothsayer", "microservice":"ocscp-scp-notification", "engVersion":"26.1.201", "mktgVersion":"26.1.201.0.0", "vendor":"oracle", "namespace":"scpsvc", "node":"worker1", "pod":"ocscp-scp-notification-547f699c96-m7nc8", "subsystem":"notification", "instanceType":"prod", "processId":"1"} { "instant": { "epochSecond":1620272241,"nanoOfSecond":734873890}, "thread":"runQueueThreadPool1","level":"WARN","loggerName":"com.oracle.cgbu.cne.scp.soothsayer.scheduler.RunQueueConsumer","message":"{logMsg=Profile Processing failed, nfInstanceId=93ED74AA-A29C-4450-9D7A-9278CAF6266D}", "endOfBatch":false, "loggerFqcn":"org.apache.logging.log4j.spi.AbstractLogger", "threadId":34, "threadPriority":5, "messageTimestamp":"21-05-06 03:37:21.734+0000", "application":"ocscp-soothsayer", "microservice":"ocscp-scp-</pre>

Table 6-23 (Cont.) SCPNotificationProcessingFailureForNF

Field	Description
	notification", "engVersion": "26.1.201", "mktgVersion": "26.1.201.0.0", "vendor": "oracle", "namespace": "scpsvc", "node": "worker1", "pod": "ocscp-scpc-notification-547f699c96-m7nc8", "subsystem": "notification", "instanceType": "prod", "processId": "1"} For information about the topology source APIs, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. Recovery: This alert is cleared automatically after 15 minutes. For any assistance, contact My Oracle Support.

6.3.20 SCPSubscriptionFailureForNFType

Table 6-24 SCPSubscriptionFailureForNFType

Field	Description
Severity	Critical
Conditions	increase(ocscp_subscription_nf_failure_total[2m]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.2001
Description	Alerts is raised when SCP subscription to NRF has failed. This alert is labeled with specific nfType, nrfRegionOrSetId, and auditMethod.

Table 6-24 (Cont.) SCPSubscriptionFailureForNFType

Field	Description
Recommended Actions	Cause: When the subscription fails for an NF Type with NRF. Diagnostic Information: Check whether NRF is up. To check NRF status, see <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>. Check whether the NRF is reachable or not by using one of the following steps: - Run the ping command from primary or secondary nodes using IP of NRF. Example of a ping command: ping <IPAddress>. - Run the ping command from inside the pod if FQDN of NRF is used. - Instead of using ping, you can collect tcpdump for ensuring the connectivity. Example of a tcpdump: tcpdump -w capture.pcap -i <pod interface>. If NRF is up, check scp-worker logs to find any error response from NRF. If there are error responses, monitor NRF logs: kubectl logs <pod name> -n <namespace>. Sample logs: <pre>{ "instant": {"epochSecond":1620275506,"nanoOfSecond":134773910}, "thread":"pool-8- thread-1","level":"ERROR","loggerName":"com.oracle.cgbu.cne.scp.soothsayer.subscription.processor.SubscriptionDataConsumer","message":"{logMsg=Exception occurred while handling action for subscriber data, action=TO_BE_RENEWED, stackTrace=com.oracle.cgbu.cne.scp.soothsayer.subscription.operations.NrfSubscriptionClient.triggerPatchRequest(NrfSubscriptionClient.java:177)\ncom.oracle.cgbu.cne.scp.soothsayer.subscription.processor.SubscriptionDataConsumer.handleAction(SubscriptionsDataConsumer.java:322)\ncom.oracle.cgbu.cne.scp.soothsayer.subscription.processor.SubscriptionDataConsumer.consumeSQ(SubscriptionsDataConsumer.java:140)\ncom.oracle.cgbu.cne.scp.soothsayer.subscription.processor.SubscriptionDataConsumer.run(SubscriptionsDataConsumer.java:84)\njava.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1130)\njava.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:630)\njava.base/java.lang.Thread.run(Thread.java:832)}", "endOfBatch":false, "loggerFqn":"org.apache.logging.log4j.spi.AbstractLogger", "threadId":33, "threadPriority":5, "messageTimestamp":"21-05-06 04:31:46.134+0000", "application":"ocscp-soothsayer", "microservice":"ocscp-scp-subscription", "engVersion":"1.15.0", "mktgVersion":"1.15.0.0.0", "vendor":"oracle", "namespace":"scpsvc", "node":"primary", "pod":"ocscp-scp-</pre>

Table 6-24 (Cont.) SCPSubscriptionFailureForNFType

Field	Description
	subscription-55cfb57cc6-2qp2g", "subsystem": "subscription", "instanceType": "prod", "processId": "1"} Recovery: This alert is cleared automatically when NRF is up and running or errors are corrected for received error responses. For any assistance, contact My Oracle Support.

6.3.21 SCPReSubscriptionFailureForNFType

Table 6-25 SCPReSubscriptionFailureForNFType

Field	Description
Severity	Critical
Conditions	increase(ocscp_patch_subscription_nf_failure_total[2m]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.2002
Description	Alerts is raised when SCP re-subscription to NRF has failed. This alert is labeled with specific nftype, nrfRegionOrSetId, and auditmethod.
Recommended Actions	Cause: When the re-subscription fails for an NF Type with NRF. Diagnostic Information: Check whether NRF is up. To check the NRF status, see the <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>. Check whether the NRF is reachable or not by using one of the following steps: - Run the ping command from primary/secondary nodes by using IP of NRF. Example of a ping command: ping <IPAddress>. - Run the ping command from inside the pod, if FQDN of NRF is used. - Instead of using ping, you can collect tcpdump for ensuring the connectivity. Example of a tcpdump: tcpdump -w capture.pcap -i <pod interface>. Check scp-worker logs to find any error response from NRF. If there are error responses, monitor NRF logs: kubectl logs <pod name> -n <namespace>. Recovery: This alert is cleared automatically when NRF is up and running or errors are corrected for received error responses. For any assistance, contact My Oracle Support.

6.3.22 SCPNrfRegistrationFailureForRegionOrSetId

Table 6-26 SCPNrfRegistrationFailureForRegionOrSetId

Field	Description
Description	'SCP Registration Failure for Region Or SetId: {{\$labels.nrfRegionOrSetId}}'

Table 6-26 (Cont.) SCPNrfRegistrationFailureForRegionOrSetId

Field	Description
Summary	'SCP Registration Failure for Region Or SetId: {{\$labels.nrfRegionOrSetId}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, scpFqdn: '{{\$labels.scpFqdn}}', timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Conditions	This alert is raised when SCP registration fails. This alert is labeled with specific nftype, nrfRegionOrSetId, and auditmethod. increase(ocscp_subscription_nrf_registration_failure_total[2m]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.2003
Metric Used	ocscp_subscription_nrf_registration_failure_total
Recommended Actions	Cause: When the registration fails for an NF Type with NRF. Diagnostic Information: Check whether NRF is up. To check the NRF status, see the <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>. Check whether the NRF is reachable or not by using one of the following steps: - Run the ping command from primary or secondary nodes by using IP of NRF. Example of a ping command: ping <IPAddress>. - Run the ping command from inside the pod if FQDN of NRF is used. - Instead of using ping, you can collect tcpdump for ensuring the connectivity. Example of a tcpdump: tcpdump -w capture.pcap -i <pod interface>. Check scp-worker logs to find any error response from NRF. If there are error responses, monitor NRF logs: kubectl logs <pod name> -n <namespace>. Sample logs: <pre>{ "instant": { "epochSecond":1620638888,"nanoOfSecond":78728229,"thread":"reg istration-0","level":"ERROR","loggerName":"com.oracle.cgbu.cne.s cp.soothsayer.subscription.processor.NrfRegistrationProcessor", "message":"{logMsg=Registration will be retried after configured interval, configuredIntervalInSec=6}","endOfBatch":false,"loggerFqcn":"org .apache.logging.log4j.spi.AbstractLogger","threadId":33,"threadP riority":5,"messageTimestamp":"21-05-10 09:28:08.078+0000","application":"ocscp- soothsayer","microservice":"ocscp-scp- subscription","engVersion":"26.1.201","mktgVersion":"26.1.201.0. 0","vendor":"oracle","namespace":"scpsvc","node":"worker1","pod" : "ocscp-scp- subscription-66c68b9db6-6g582","subsystem":"subscription","insta nceType":"prod","processId":"1"} }</pre> Recovery: This alert is cleared automatically when NRF is up and running or errors are corrected for received error responses. For any assistance, contact My Oracle Support.

6.3.23 SCPNrfHeartbeatFailureForRegionOrSetId

Table 6-27 SCPNrfHeartbeatFailureForRegionOrSetId

Field	Description
Description	Alerts is raised when SCP Heartbeat fails.
Summary	SCP Heartbeat to NRF Failure for Region Or SetId: {{ \$labels.nrfRegionOrSetId }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpfqdn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Major
Conditions	increase(ocscp_subscription_nrf_heartbeat_failures_total[2m]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.2004
Recommended Actions	Cause: When the Heartbeat fails for an NF Type with NRF. Diagnostic Information: Check whether NRF is up. To check the NRF status, see the <i>Oracle Communications Cloud Native Core, Network Repository Function User Guide</i>. Check whether the NRF is reachable or not by using one of the following steps: - Run the ping command from primary or secondary nodes by using IP of NRF. Example of a ping command: ping <IPAddress>. - Run the ping command from inside the pod if FQDN of NRF is used. - Instead of using ping, you can collect tcpdump for ensuring the connectivity. Example of a tcpdump: tcpdump -w capture.pcap -i <pod interface>. Check scp-worker logs to find any error response from NRF. If there are error responses, monitor NRF logs: kubectl logs <pod name> -n <namespace>. Recovery: This alert is cleared automatically when NRF is up and running or errors are corrected for received error responses. For any assistance, contact My Oracle Support.

6.3.24 SCPDBOperationFailure

Table 6-28 SCPDBOperationFailure

Field	Description
Severity	Warning
Conditions	increase(ocscp_db_operation_failure_total[2m]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.2005
Description	Alert is raised for any DB operation failures.

Table 6-28 (Cont.) SCPDBOperationFailure

Field	Description
Recommended Actions	Cause: When the SCP DB operation fails. Diagnostic Information: Check whether the DB service is up. Check the status/age of the mysql pod by using the following command: <code>kubectl get pods -n <namespace></code>. Where, <namespace> is the namespace in which mysql pod is deployed. Recovery: This alert is cleared automatically when the DB service is up and running. For any assistance, contact My Oracle Support.

6.3.25 SCPGeneratedErrorsResponseForNFService

Table 6-29 SCPGeneratedErrorsResponseForNFService

Field	Description
Severity	Info
Conditions	<code>increase(ocscp_metric_scp_generated_response_total[2m]) > 0</code>
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.7016
Description	Alert is raised for NF type for which SCP generated response is triggered.
Recommended Actions	Cause: When the error response is generated for NF Service Type by SCP. Diagnostic Information: Monitor scp-worker logs to determine the reason for error responses generated by SCP. Check for error reason in the logs: <code>kubectl logs <pod name> -n <namespace></code>. Recovery: This alert is cleared automatically when the cause for error response at SCP worker is corrected and configured. For any assistance, contact My Oracle Support.

6.3.26 SCPCircuitBreakingAppliedForNF

Table 6-30 SCPCircuitBreakingAppliedForNF

Field	Description
Severity	Info
Conditions	<code>ocscp_circuit_breaking_applied > 0</code>
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.7017
Description	Alert is raised for NF when circuit breaking is applied.

Table 6-30 (Cont.) SCPCircuitBreakingAppliedForNF

Field	Description
Recommended Actions	Cause: When Circuit Breaking applies for producer NF FQDN based on the configured http2MaxRequests value. Diagnostic Information: Monitor scp-worker logs for number of error responses when outstanding requests exceed the configured http2MaxRequests value: <code>kubectl logs <pod name> -n <namespace></code>. Check the latency to upstream producer from SCP. Use the following metric to check the same: <code>ocscp_metric_upstream_service_time_total(ocscp_producer_host or ocscp_nf_end_point)</code>. Recovery: This alert is cleared automatically when the configuration for http2MaxRequests for circuit breaking is configured beyond the traffic at worker or lower the traffic than the value configured for circuit breaking. For any assistance, contact My Oracle Support.

6.3.27 SCPUpgradeStarted

Table 6-31 SCPUpgradeStarted

Field	Description
Severity	Info
Conditions	When the SCP upgrade process for an SCP microservice starts.
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.6001
Description	Alert is raised when the SCP upgrade process for an SCP microservice starts.
Recommended Actions	Cause: When SCP upgrade is performed for a particular microservice. Diagnostic Information: Not applicable. Recovery: This alert is cleared automatically in 5 minutes when the <code>customAlertExpiryEnabled</code> parameter is set to <code>false</code> in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the <code>customAlertExpiryDuration</code> parameter when the <code>customAlertExpiryEnabled</code> value is <code>true</code>. For any assistance, contact My Oracle Support.

6.3.28 SCPUpgradeFailed

Table 6-32 SCPUpgradeFailed

Field	Description
Severity	Critical
Conditions	When any SCP microservice upgrade fails during the upgrade process.
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.6002
Description	Alert is raised when any SCP microservice upgrade fails.

Table 6-32 (Cont.) SCPUpgradeFailed

Field	Description
Recommended Actions	Cause: When any SCP microservice upgrade fails during the upgrade process. Diagnostic Information: Monitor new hook-jobs that might have failed after multiple attempts. Also, monitor any failed log. Run the following command to check the pod of hook-job: <code>kubectl get pods -n <namespace></code>. Run the following command to check the logs: <code>kubectl logs <pod name> -n <namespace></code>. Recovery: This alert is cleared automatically in 5 minutes when the <code>customAlertExpiryEnabled</code> parameter is set to <code>false</code> in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the <code>customAlertExpiryDuration</code> parameter when the <code>customAlertExpiryEnabled</code> value is <code>true</code>. For any assistance, contact My Oracle Support.

6.3.29 SCPUpgradeSuccessful

Table 6-33 SCPUpgradeSuccessful

Field	Description
Severity	Info
Conditions	When any SCP microservice upgrade is completed.
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.6003
Description	Alert is raised when any SCP microservice upgrade is completed.
Recommended Actions	Cause: When any SCP microservice upgrade is completed. Diagnostic Information: Not applicable. Run the following command to check the pod of hook-job: <code>kubectl get pods -n <namespace></code>. Run the following command to check the logs: <code>kubectl logs <pod name> -n <namespace></code>. Recovery: This alert is cleared automatically in 5 minutes when the <code>customAlertExpiryEnabled</code> parameter is set to <code>false</code> in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the <code>customAlertExpiryDuration</code> parameter when the <code>customAlertExpiryEnabled</code> value is <code>true</code>. For any assistance, contact My Oracle Support.

6.3.30 SCPRollbackStarted

Table 6-34 SCPRollbackStarted

Field	Description
Severity	Info
Conditions	When the rollback process for an SCP microservice starts.
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.6004

Table 6-34 (Cont.) SCPRollbackStarted

Field	Description
Description	Alert is raised when the rollback process for an SCP microservice starts.
Recommended Actions	Cause: When the rollback process for an SCP microservice starts. Diagnostic Information: Not applicable. Recovery: This alert is cleared automatically in 5 minutes when the <code>customAlertExpiryEnabled</code> parameter is set to <code>false</code> in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the <code>customAlertExpiryDuration</code> parameter when the <code>customAlertExpiryEnabled</code> value is <code>true</code>. For any assistance, contact My Oracle Support.

6.3.31 SCPRollbackFailed

Table 6-35 SCPRollbackFailed

Field	Description
Severity	Critical
Conditions	When any SCP microservice rollback fails during the rollback process.
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.6005
Description	Alert is raised when any SCP microservice rollback fails.
Recommended Actions	Cause: When any SCP microservice rollback fails during the rollback process. Diagnostic Information: Monitor new hook-jobs that might have failed after multiple attempts. Also, monitor any failed log. Run the following command to check the pod of hook-job: <pre>kubectl get pods -n <namespace></pre> Run the following command to check the logs: <pre>kubectl logs <pod name> -n <namespace></pre> Recovery: This alert is cleared automatically in 5 minutes when the <code>customAlertExpiryEnabled</code> parameter is set to <code>false</code> in the <code>ocscp_values.yaml</code> file. Otherwise, it is cleared after a specific duration as specified in the <code>customAlertExpiryDuration</code> parameter when the <code>customAlertExpiryEnabled</code> value is <code>true</code>. For any assistance, contact My Oracle Support.

6.3.32 SCPRollbackSuccessful

Table 6-36 SCPRollbackSuccessful

Field	Description
Severity	Info

Table 6-36 (Cont.) SCPRollbackSuccessful

Field	Description
Conditions	When any SCP microservice rollback is completed.
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.6006
Description	Alert is raised when any SCP microservice rollback is completed.
Recommended Actions	Cause: When any SCP microservice rollback is completed. Diagnostic Information: Not applicable. Recovery: This alert is cleared automatically in 5 minutes when the customAlertExpiryEnabled parameter is set to false in the ocscp_values.yaml file. Otherwise, it is cleared after a specific duration as specified in the customAlertExpiryDuration parameter when the customAlertExpiryEnabled value is true. For any assistance, contact My Oracle Support.

6.3.33 ScpWorkerPodCpuUtilizationAboveWarnThreshold

Table 6-37 ScpWorkerPodCpuUtilizationAboveWarnThreshold

Field	Details
Description	CPU utilization of SCP worker at warn level
Summary	CPU utilization of SCP worker at warn level. namespace: <code>{{ \$labels.kubernetes_namespace }}</code> , podname: <code>{{ \$labels.kubernetes_pod_name }}</code> , timestamp: <code>{{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}</code> and value = <code>{{ \$value }}</code>
Severity	Warning
Condition	This alert is raised when CPU utilization of SCP-Worker reaches the WARN level. <code>increase(ocscp_worker_pod_overload_control_cpu_utilization_total{ocscp_threshold_level="WARN"}[2m]) > 0</code>
OID	1.3.6.1.4.1.323.5.3.35.1.2.7018
Metric Used	ocscp_worker_pod_overload_control_cpu_utilization_total
Recommended Action	Cause: When CPU utilization of scp-worker reaches the WARN level. Diagnostic Information: 1. Get the configured threshold level values using Pod Overload Control Policy REST APIs. For more information about Pod Overload Control Policy, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. 2. Check the CPU threshold level status from the scp-worker pod logs under the warn level. Recovery: • Reduce the incoming service request rate. • This alert is automatically cleared when CPU utilization is reduced to below WARN threshold level. For any assistance, contact My Oracle Support.

6.3.34 ScpWorkerPodCpuUtilizationAboveMinorThreshold

Table 6-38 ScpWorkerPodCpuUtilizationAboveMinorThreshold

Field	Details
Description	CPU utilization of SCP worker at minor level
Summary	CPU utilization of SCP worker at minor level. namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , timestamp: <code>{{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}</code> and value = <code>{{ \$value }}</code>
Severity	Minor
Condition	This alert is raised when CPU utilization of scp-worker reaches the MINOR level. <code>increase(ocscp_worker_pod_overload_control_cpu_utilization_total{ocs_cp_threshold_level="MINOR"}[2m]) > 0</code>
OID	1.3.6.1.4.1.323.5.3.35.1.2.7019
Metric Used	ocscp_worker_pod_overload_control_cpu_utilization_total
Recommended Action	Cause: When CPU utilization of SCP-Worker reaches the MINOR level. Diagnostic Information: 1. Get the configured threshold level values using Pod Overload Control Policy REST APIs. For more information about Pod Overload Control Policy, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. 2. Check the CPU threshold level status from the scp-worker pod logs under the warn level. Recovery: • Reduce the incoming service request rate. • This alert is automatically cleared when CPU utilization is reduced to below MINOR threshold level. For any assistance, contact My Oracle Support.

6.3.35 ScpWorkerPodCpuUtilizationAboveMajorThreshold

Table 6-39 ScpWorkerPodCpuUtilizationAboveMajorThreshold

Field	Details
Description	CPU utilization of SCP worker at major level
Summary	Worker CPU utilization lead to major level. namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , timestamp: <code>{{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}</code>
Severity	Major
Condition	This alert is raised when CPU utilization of scp-worker reaches the MAJOR level. <code>increase(ocscp_worker_pod_overload_control_cpu_utilization_total{ocs_cp_threshold_level="MAJOR"}[2m]) > 0</code>
OID	1.3.6.1.4.1.323.5.3.35.1.2.7020
Metric Used	ocscp_worker_pod_overload_control_cpu_utilization_total

Table 6-39 (Cont.) ScpWorkerPodCpuUtilizationAboveMajorThreshold

Field	Details
Recommended Action	Cause: When CPU utilization of SCP-Worker reaches the MAJOR level. Diagnostic Information: 1. Get the configured threshold level values using Pod Overload Control Policy REST APIs. For more information about Pod Overload Control Policy, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. 2. Check the CPU threshold level status from the scp-worker pod logs under the warn level. Recovery: • Reduce the incoming service request rate. • This alert is automatically cleared when CPU utilization is reduced to below MAJOR threshold level. For any assistance, contact My Oracle Support.

6.3.36 ScpWorkerPodCpuUtilizationAboveCriticalThreshold

Table 6-40 ScpWorkerPodCpuUtilizationAboveCriticalThreshold

Field	Details
Description	CPU utilization of SCP worker at critical level
Summary	Worker CPU utilization lead to critical level. namespace: <code>{{labels.kubernetes_namespace}}</code> , podname: <code>{{labels.kubernetes_pod_name}}</code> , timestamp: <code>{{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}</code>
Severity	Critical
Condition	This alert is raised when CPU utilization of scp-worker reaches the CRITICAL level. <code>increase(ocscp_worker_pod_overload_control_cpu_utilization_total{ocscp_threshold_level="CRITICAL"}[2m]) > 0</code>
OID	1.3.6.1.4.1.323.5.3.35.1.2.7021
Metric Used	ocscp_worker_pod_overload_control_cpu_utilization_total
Recommended Action	Cause: When CPU utilization of scp-worker reaches the CRITICAL level. Diagnostic Information: 1. Get the configured threshold level values using Pod Overload Control Policy REST APIs. For more information about Pod Overload Control Policy, see <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. 2. Check the CPU threshold level status from the scp-worker pod logs under the warn level. Recovery: • Reduce the incoming service request rate. • This alert is automatically cleared when CPU utilization is reduced to below CRITICAL threshold level. For any assistance, contact My Oracle Support.

6.3.37 SCPUnhealthyPeerSCPDetected

Table 6-41 SCPUnhealthyPeerSCPDetected

Field	Details
Description	Next hop SCP is marked unhealthy
Summary	'Next hop SCP is marked unhealthy. peerscp host: {{labels.peerScpName}}, scpFqdn: {{labels.scpFqdn}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }} and value = {{ \$value }}'
Severity	Info
Condition	This alert is raised when peer SCP is marked as unhealthy. ocscp_peer_scp_unhealthy > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.7022
Metric Used	ocscp_peer_scp_unhealthy
Recommended Action	Cause: The peer SCP is marked as unhealthy because of consecutive failure responses. Diagnostic Information: 1. Check transport failures and routing errors on the peer SCP. 2. Run the ping command from primary or worker nodes using IP of Service. Sample command: ping <IPAddress>. 3. If FQDN of service is used, run the ping command from inside the pod. 4. If the pod does not support the ping command, get the debug container of SCP pod. 5. If you do not want to use the ping command, collect tcpdump to establish the connection. Sample command: tcpdump -w capture.pcap -i <pod interface> Recovery: This alert is automatically cleared after the degradation time is over. Degradation time = Number of consecutive degradations multiplied by configured base ejection. For any assistance, contact My Oracle Support.

6.3.38 SCPDnsSrvQueryFailure

Table 6-42 SCPDnsSrvQueryFailure

Field	Details
Description	DNS SRV Query failed with cause {{labels.cause}}
Summary	'DNS SRV Query failed with cause {{labels.cause}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical

Table 6-42 (Cont.) SCPDnsSrvQueryFailure

Field	Details
Condition	This alert is raised when the DNS server lookup for SRV fails due to network, servfail, or timed-out errors. ocscp_alternate_resolution_dnssrv_rx_error_res == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.8001
Metric Used	ocscp_alternate_resolution_dnssrv_rx_error_res
Recommended Action	Cause: When the dnsSRVAlternateRouting flag is set to true, if the DNS SRV lookup fails due to network, servfail, or timed-out errors. Diagnostic Information: Check the DNS SRV server status and re-establish the status to normal. Recovery: This alert is automatically cleared when SCP performs a successful DNS SRV query. For any assistance, contact My Oracle Support.

6.3.39 SCPPProducerOverloadThrottled

Table 6-43 SCPPProducerOverloadThrottled

Field	Details
Description	Producer is in Throttled Overload state
Summary	Producer is in Throttled Overload state.ocscp_peer_fqdn: {{labels.ocscp_peer_fqdn}}, ocscp_peer_nf_instance_id: {{labels.ocscp_peer_nf_instance_id}}, ocscp_peer_service_instance_id: {{labels.ocscp_peer_service_instance_id}}, scpfdn: {{labels.ocscp_fqdn}}, podname: {{labels.kubernetes_pod_name}}, namespace: {{labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Info
Condition	ocscp_load_manager_peer_load_throttled_threshold == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.7023
Metric Used	ocscp_load_manager_peer_load_throttled_threshold
Recommended Action	Cause: When the load of producer NF is higher than the throttled threshold configured for the service. Diagnostic Information: 1. Check and configure the throttled threshold for each service using Routing Options REST APIs configurations as described in "Configuring Routing Options" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. 2. Check the load for each service using the NF Profile REST APIs as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. Recovery: This alert clears automatically when the NF profile is deregistered or changed with load less than the throttled abatement threshold. For any assistance, contact My Oracle Support.

6.3.40 SCPPProducerOverloadAlternateRouted

Table 6-44 SCPPProducerOverloadAlternateRouted

Field	Details
Description	Producer is in Alternate Route Overload state
Summary	Producer is in Alternate Route Overload state.ocscp_peer_fqdn: {{labels.ocscp_peer_fqdn}}, ocscp_peer_nf_instance_id: {{labels.ocscp_peer_nf_instance_id}}, ocscp_peer_service_instance_id: {{labels.ocscp_peer_service_instance_id}}, scpfdn: {{labels.ocscp_fqdn}}, podname: {{labels.kubernetes_pod_name}}, namespace: {{labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Info
Condition	ocscp_load_manager_peer_load_alternateRoute_threshold == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.7024
Metric Used	ocscp_load_manager_peer_load_alternateRoute_threshold
Recommended Action	Cause: When the load of producer NF is higher than alternate routing threshold configured for the service. Diagnostic Information: 1. Check and configure the alternate routing threshold for each service using Routing Options REST APIs configurations as described in "Configuring Routing Options" in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. 2. Check the load for each service using the NF Profile REST APIs as described in <i>Oracle Communications Cloud Native Core, Service Communication Proxy REST Specification Guide</i>. Recovery: This alert clears automatically when the NF profile is deregistered or changed with load less than the alternate routing abatement threshold. For any assistance, contact My Oracle Support.

6.3.41 SCPSeppNotConfigured

Table 6-45 SCPSeppNotConfigured

Field	Details
Description	SEPP is not configured for PLMN
Summary	'SEPP is not configured for PLMN'Summary: 'SEPP is not configured for PLMN. plmnid: {{labels.plmn_id}}, scpfdn: {{labels.scp_fqdn}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Major
Condition	This alert is raised when Security Edge Protection Proxy (SEPP) is not configured. ocscp_metric_sepp_not_configured_current == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.7025

Table 6-45 (Cont.) SCPSeppNotConfigured

Field	Details
Metric Used	cscp_metric_sepp_not_configured_current
Recommended Action	Cause: When SEPP routing related rules are not configured at SCP for selected PLMN in the inter-PLMN routing. Diagnostic Information: 1. Check whether SEPP profile is registered or SEPP related configuration is made at SCP. 2. Verify the routing rules created for selected inter-PLMN in the PLMN_SEPP_MAPPING table. Recovery: This alert clears automatically when the SEPP related routing rules are created at SCP for selected PLMN in the inter-PLMN routing. For any assistance, contact My Oracle Support.

6.3.42 SCPSeppRoutingFailed

Table 6-46 SCPSeppRoutingFailed

Field	Details
Description	Routing towards SEPP failed
Summary	Routing towards SEPP failed. sepp_fqdn: {{\$labels.ocscp_sepp_fqdn}}, scpfqdn: {{\$labels.scp_fqdn}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Minor
Condition	This alert is raised when routing towards SEPP fails. ocscp_metric_sepp_routing_attempt_fail_current == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.7026
Metric Used	ocscp_metric_sepp_routing_attempt_fail_current

Table 6-46 (Cont.) SCPSeppRoutingFailed

Field	Details
Recommended Action	Cause: Inter-PLMN routing failed for the selected SEPP instances. Diagnostic Information: 1. Check whether selected SEPP is up and healthy. 2. Check if selected SEPP is reachable. 3. Use the ping command from primary or secondary nodes using IP of SEPP. Sample ping command is ping <IpAddress> 4. If FQDN of SEPP is used, try ping command from inside the pod. 5. Alternative to ping, collect tcpdump for ensuring proper connectivity. Sample command: tcpdump -w capture.pcap -i <pod interface> 6. Check scp-worker logs for any error response from selected SEPP. If there are error responses, monitor selected SEPP logs by running this command: kubectl logs <pod name> -n <namespace> Recovery: This alert clears automatically when routing is successful for selected SEPP. For any assistance, contact My Oracle Support.

6.3.43 SCPGlobalEgressRLRemoteParticipantConnectivityFailure

Table 6-47 SCPGlobalEgressRLRemoteParticipantConnectivityFailure

Field	Details
Description	'SCP Global Egress RL Remote Participant Connectivity Failure for participant
Summary	'SCP Global Egress RL Remote Participant Connectivity Failure for participant: {{ \$labels.scp_remote_coh_cluster_name }}, scp_fqdn: {{ \$labels.scp_fqdn }}, scp_local_coh_cluster_name: {{ \$labels.scp_local_coh_cluster_name }}, scp_remote_coh_cluster_fqdn: {{ \$labels.scp_remote_coh_cluster_fqdn }}, scp_remote_coh_cluster_port: {{ \$labels.scp_remote_coh_cluster_port }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }'
Severity	Major
Condition	This alert is raised when the remote participant SCP connection is not established or goes down. ocscp_global_egress_rl_remote_participant_connectivity_failure == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9001
Metric Used	ocscp_global_egress_rl_bucketkey_not_rate_controlled_total

Table 6-47 (Cont.) SCPGlobalEgressRLRemoteParticipantConnectivityFailure

Field	Details
Recommended Action	Cause: When the remote participant SCP connection is not established or down. Diagnostic Information: 1. Check whether the FQDN or IP port are properly configured with remote SCP's scp-cache microservice. 2. Check whether clusterName and NFInstanceId are configured for the remote SCP. 3. Check whether communication path is active between the two SCP's scp-cache microservice. 4. Run the following command to monitor scp-cache logs: <code>kubectl logs <pod name> -n <namespace></code> Recovery: This alert clears automatically if the connection is established with the remote participant SCP. For any assistance, contact My Oracle Support.

6.3.44 SCPGlobalEgressRLRemoteParticipantWithDuplicateNFInstanceId

Table 6-48 SCPGlobalEgressRLRemoteParticipantWithDuplicateNFInstanceId

Field	Details
Description	This alert is raised when a duplicate remote coherence participant is found.
Summary	SCP Global Egress RL Remote Participant Configured With Duplicate NFInstanceId for participant: {{ \$labels.scp_remote_coh_cluster_name }}, scp_fqdn: {{ \$labels.ocscp_fqdn }}, scp_nf_instance_id: {{ \$labels.scp_nf_instance_id }}, scp_local_coh_cluster_name: {{ \$labels.scp_local_coh_cluster_name }}, scp_remote_coh_cluster_fqdn: {{ \$labels.scp_remote_coh_cluster_fqdn }}, scp_remote_coh_cluster_port: {{ \$labels.scp_remote_coh_cluster_port }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Major
Condition	ocscp_global_egress_rl_remote_participant_is_duplicate == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.13001
Metric Used	ocscp_global_egress_rl_remote_participant_is_duplicate

Table 6-48 (Cont.) SCPGlobalEgressRLRemoteParticipantWithDuplicateNFInstanceId

Field	Details
Recommended Action	Cause: Duplicate configuration of remote coherence participants with local SCP. Diagnostic Information: 1. Ensure Global Rate Limit feature is enabled. 2. Check whether the clusterName and NFInstanceId of local SCPs and remote SCPs are not duplicates. 3. Check whether the clusterName and NFInstanceId of the first remote SCP and the second remote SCP are not duplicates. 4. Configure unique values for clusterName and NFInstanceId for local SCPs as well as remote SCPs. Recovery: This alert is cleared automatically if no duplicate configurations between local and remote SCPs are found. For any assistance, contact My Oracle Support.

6.3.45 SCPMediationConnectivityFailure

Table 6-49 SCPMediationConnectivityFailure

Field	Details
Description	'SCP Mediation Connectivity Failed, scp_fqdn
Summary	'SCP Mediation Connectivity Failed, scp_fqdn: {{\$labels.scp_fqdn}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alert is raised when Mediation connection is not established or request to Mediation is not successful. ocscp_mediation_http_not_reachable == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9002
Metric Used	ocscp_mediation_http_not_reachable

Table 6-49 (Cont.) SCPMediationConnectivityFailure

Field	Details
Recommended Action	Cause: The remote Mediation connection is not established or request to Mediation is not successful. Diagnostic Information: 1. Check the errors of the ocscp_mediation_http_not_reachable metric on the Grafana dashboard. 2. Run the following command to check the status of the mediation pod: <pre>kubectl get pods -n <namespace></pre> Recovery: 1. If the mediation pod is not in the ready state, run the following command to check the scp-mediation logs: <pre>kubectl logs <pod name> -n <namespace></pre> 2. If the mediation pod is absent, then redeploy or upgrade SCP with mediationService set to true. This alert clears automatically when the connection is established with Mediation when Mediation is invoked from any of the trigger points. For any assistance, contact My Oracle Support.

6.3.46 SCPNotificationQueuesUtilizationAboveMinorThreshold

Table 6-50 SCPNotificationQueuesUtilizationAboveMinorThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Notification Queues Utilization Above Minor Threshold'
Summary	'SCP Notification Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Minor
Condition	This alert is raised when the queues in the notification service are utilized above 65% of the maximum size (user configure minor threshold value). ocscp_notification_queue_alert{severity="MINOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.3009
Metric Used	ocscp_notification_queue_alert

Table 6-50 (Cont.) SCPNotificationQueuesUtilizationAboveMinorThreshold

Field	Details
Recommended Action	Cause: The Notification module is getting more traffic than expected. Diagnostic Information: 1. Monitor Notification traffic to pod using the KPI dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_notification_queue_utilization Recovery: This alert clears automatically when notification traffic goes below minor threshold or exceeds major threshold. For any assistance, contact My Oracle Support.

6.3.47 SCPNotificationQueuesUtilizationAboveMajorThreshold

Table 6-51 SCPNotificationQueuesUtilizationAboveMajorThreshold

Field	Details
Description	'instancetype: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Notification Queues Utilization Above Major Threshold'
Summary	'SCP Notification Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }{'
Severity	Major
Condition	This alert is raised when the queues in the notification service is utilized above 75% of the maximum size (user configure major threshold value). ocscp_notification_queue_alert{severity="MAJOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.3009
Metric Used	ocscp_notification_queue_alert
Recommended Action	Cause: The Notification module is getting more traffic than expected. Diagnostic Information: 1. Monitor Notification traffic to pod using the KPI dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_notification_queue_utilization Recovery: This alert clears automatically when notification traffic goes below major threshold or above critical major threshold. For any assistance, contact My Oracle Support.

6.3.48 SCPNotificationQueuesUtilizationAboveCriticalThreshold

Table 6-52 SCPNotificationQueuesUtilizationAboveCriticalThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Notification Queues Utilization Above Critical Threshold'
Summary	'SCP Notification Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when the queues in notification service are utilized above 85% of the maximum size (user configure critical threshold value). ocscp_notification_queue_alert{severity="CRITICAL"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.3009
Metric Used	ocscp_notification_queue_alert
Recommended Action	Cause: The Notification module is getting more traffic than expected. Diagnostic Information: 1. Monitor Notification traffic to pod using the KPI dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_notification_queue_utilization Recovery: This alert clears automatically when notification traffic goes below critical threshold. For any assistance, contact My Oracle Support.

6.3.49 SCPNrfProxyQueuesUtilizationAboveMinorThreshold

Table 6-53 SCPNrfProxyQueuesUtilizationAboveMinorThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Nrfproxy Queues Utilization Above Minor Threshold'
Summary	'SCP Nrfproxy Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Minor
Condition	This alert is raised when the task queues in scp-nrfproxy service are utilized above 65% of the maximum size (user configure minor threshold value). ocscp_nrfproxy_queue_alert{severity="MINOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9010
Metric Used	ocscp_nrfproxy_queue_alert

Table 6-53 (Cont.) SCPNrfProxyQueuesUtilizationAboveMinorThreshold

Field	Details
Recommended Action	Cause: NrfProxy task queues are getting filled and the traffic is more than expected. Diagnostic Information: 1. Monitor traffic towards nrfProxy to pod using the KPI dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_nrfproxy_queue_utilization Recovery: This alert clears automatically when the traffic goes below minor threshold or above major threshold. For any assistance, contact My Oracle Support.

6.3.50 SCPNrfProxyQueuesUtilizationAboveMajorThreshold

Table 6-54 SCPNrfProxyQueuesUtilizationAboveMajorThreshold

Field	Details
Description	'instancetype: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Nrfproxy Queues Utilization Above Major Threshold'
Summary	'SCP Nrfproxy Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }'
Severity	Major
Condition	This alert is raised when the task queues in scp-nrfproxy service are utilized above 75% of the maximum size (user configure major threshold value). ocscp_nrfproxy_queue_alert{severity="MAJOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9010
Metric Used	ocscp_nrfproxy_queue_alert
Recommended Action	Cause: NrfProxy task queues are getting filled and the traffic is more than expected. Diagnostic Information: 1. Monitor traffic towards nrfProxy to pod using the KPI dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_nrfproxy_queue_utilization Recovery: This alert clears automatically when the traffic goes below major threshold or above critical threshold. For any assistance, contact My Oracle Support.

6.3.51 SCPNrfProxyQueuesUtilizationAboveCriticalThreshold

Table 6-55 SCPNrfProxyQueuesUtilizationAboveCriticalThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Nrfproxy Queues Utilization Above Critical Threshold'
Summary	'SCP Nrfproxy Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when the task queues in scp-nrfproxy service are utilized above 85% of the maximum size (user configure critical threshold value). ocscp_nrfproxy_queue_alert{severity="CRITICAL"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9010
Metric Used	ocscp_nrfproxy_queue_alert
Recommended Action	Cause: NrfProxy task queues are getting filled and the traffic is more than expected. Diagnostic Information: 1. Monitor traffic towards nrfProxy to pod using the KPI dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_nrfproxy_queue_utilization Recovery: This alert clears automatically when the traffic goes below critical threshold. For any assistance, contact My Oracle Support.

6.3.52 SCPWorkerQueuesUtilizationAboveMinorThreshold

Table 6-56 SCPWorkerQueuesUtilizationAboveMinorThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Worker Queues Utilization Above Minor Threshold'
Summary	'SCP Worker Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Minor
Condition	This alert is raised when task queues in scp-worker service are utilized above 65% of the maximum size (user configure minor threshold value). ocscp_worker_queue_alert{severity="MINOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9007
Metric Used	ocscp_worker_queue_alert

Table 6-56 (Cont.) SCPWorkerQueuesUtilizationAboveMinorThreshold

Field	Details
Recommended Action	Cause: Worker task queues are getting filled and the traffic is more than expected. Diagnostic Information: 1. Monitor traffic towards nrfProxy to pod using the KPI dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_worker_queue_utilization Recovery: This alert clears automatically when the traffic goes below minor threshold or above major threshold. For any assistance, contact My Oracle Support.

6.3.53 SCPWorkerQueuesUtilizationAboveMajorThreshold

Table 6-57 SCPWorkerQueuesUtilizationAboveMajorThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Worker Queues Utilization Above Major Threshold'
Summary	'SCP Worker Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alert is raised when task queues in scp-worker service are utilized above 75% of the maximum size (user configure major threshold value). ocscp_worker_queue_alert{severity="MAJOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9007
Metric Used	ocscp_worker_queue_alert
Recommended Action	Cause: Worker task queues are getting filled and the traffic is more than expected. Diagnostic Information: 1. Monitor traffic towards nrfProxy to pod using the KPI dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_worker_queue_utilization Recovery: This alert clears automatically when the traffic goes below major threshold or goes above critical threshold. For any assistance, contact My Oracle Support.

6.3.54 SCPWorkerQueuesUtilizationAboveCriticalThreshold

Table 6-58 SCPWorkerQueuesUtilizationAboveCriticalThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Worker Queues Utilization Above Critical Threshold'
Summary	'SCP Worker Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when task queues in scp-worker service are utilized above 85% of the maximum size (user configure critical threshold value). ocscp_worker_queue_alert{severity="CRITICAL"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9007
Metric Used	ocscp_worker_queue_alert
Recommended Action	Cause: Worker task queues are getting filled and the traffic is more than expected. Diagnostic Information: 1. Monitor traffic towards nrfProxy to pod using the KPI dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_worker_queue_utilization Recovery: This alert clears automatically when the traffic goes below critical threshold. For any assistance, contact My Oracle Support.

6.3.55 SCPCacheQueuesUtilizationAboveMinorThreshold

Table 6-59 SCPCacheQueuesUtilizationAboveMinorThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Cache Queues Utilization Above Minor Threshold'
Summary	'SCP Cache Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Minor
Condition	This alert is raised when the task queues in the scp-cache service are utilized above 65% of their maximum size (the user-configured minor threshold value). ocscp_cache_queue_alert{severity="MINOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.13000
Metric Used	ocscp_cache_queue_alert

Table 6-59 (Cont.) SCPCacheQueuesUtilizationAboveMinorThreshold

Field	Details
Recommended Action	Cause: When the cache task queues are getting filled, and traffic is higher than expected. Diagnostic Information: 1. Monitor traffic towards the cache pod using the KPI Dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocsdp_cache_queue_utilization. Recovery: The alert is cleared automatically when minor threshold or goes above major threshold. For any assistance, contact My Oracle Support.

6.3.56 SCPCacheQueuesUtilizationAboveMajorThreshold

Table 6-60 SCPCacheQueuesUtilizationAboveMajorThreshold

Field	Details
Description	'instancetype: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Cache Queues Utilization Above Major Threshold'
Summary	SCP Cache Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}
Severity	Major
Condition	This alert is raised when the task queues in the scp-cache service are utilized above 75% of their maximum size (the user-configured major threshold value). ocsdp_cache_queue_alert{severity="MAJOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.13000
Metric Used	ocsdp_cache_queue_alert
Recommended Action	Cause: When the cache task queues are getting filled, and traffic is higher than expected. Diagnostic Information: 1. Monitor traffic towards the cache pod using the KPI Dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocsdp_cache_queue_utilization. Recovery: The alert is cleared automatically when traffic falls below a major threshold or goes above a critical threshold. For any assistance, contact My Oracle Support.

6.3.57 SCPCacheQueuesUtilizationAboveCriticalThreshold

Table 6-61 SCPCacheQueuesUtilizationAboveCriticalThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Cache Queues Utilization Above Critical Threshold'
Summary	'SCP Cache Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when the task queues in the scp-cache service are utilized above 85% of their maximum size (the user-configured critical threshold value). ocscp_cache_queue_alert{severity="CRITICAL"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.13000
Metric Used	ocscp_cache_queue_alert
Recommended Action	Cause: When the cache task queues are getting filled, and traffic is higher than expected. Diagnostic Information: 1. Monitor traffic towards the cache pod using the KPI Dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_cache_queue_utilization. Recovery: The alert is cleared automatically when traffic falls below a critical threshold. For any assistance, contact My Oracle Support.

6.3.58 SCPLoadManagerQueuesUtilizationAboveMinorThreshold

Table 6-62 SCPLoadManagerQueuesUtilizationAboveMinorThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Load Manage Queues Utilization Above Minor Threshold'
Summary	SCP Load Manager Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Minor
Condition	This alert is raised when the task queues in the scp-load-manager service are utilized above 65% of their maximum size (the user-configured major threshold value). ocscp_load_manager_queue_alert{severity="MINOR"}
OID	1.3.6.1.4.1.323.5.3.35.1.2.11000
Metric Used	ocscp_load_manager_queue_alert

Table 6-62 (Cont.) SCPLoadManagerQueuesUtilizationAboveMinorThreshold

Field	Details
Recommended Action	Cause: When the cache task queues are getting filled, and traffic is higher than expected. Diagnostic Information: 1. Monitor traffic towards the cache pod using the KPI Dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: <code>ocscp_load_manager_queue_utilization</code>. Recovery: The alert is cleared automatically when traffic falls below a minor threshold. For any assistance, contact My Oracle Support.

6.3.59 SCPLoadManagerQueuesUtilizationAboveMajorThreshold

Table 6-63 SCPLoadManagerQueuesUtilizationAboveMajorThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Load Manage Queues Utilization Above Major Threshold'
Summary	'SCP Load Manager Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alert is raised when the task queues in the scp-load-manager service are utilized above 75% of their maximum size (the user-configured major threshold value). <code>ocscp_load_manager_queue_alert{severity="MAJOR"} == 1</code>
OID	1.3.6.1.4.1.323.5.3.35.1.2.11000
Metric Used	<code>ocscp_load_manager_queue_alert</code>
Recommended Action	Cause: When the cache task queues are getting filled, and traffic is higher than expected. Diagnostic Information: 1. Monitor traffic towards the cache pod using the KPI Dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: <code>ocscp_load_manager_queue_utilization</code>. Recovery: The alert is cleared automatically when traffic falls below a major threshold. For any assistance, contact My Oracle Support.

6.3.60 SCPLoadManagerQueuesUtilizationAboveCriticalThreshold

Table 6-64 SCPLoadManagerQueuesUtilizationAboveCriticalThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}: SCP Load Manager Queues Utilization Above Critical Threshold'
Summary	'SCP Load Manager Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when the task queues in the scp-load-manager service are utilized above 85% of their maximum size (the user-configured critical threshold value). ocscp_load_manager_queue_alert{severity="CRITICAL"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.11000
Metric Used	ocscp_load_manager_queue_alert
Recommended Action	Cause: When the cache task queues are getting filled, and traffic is higher than expected. Diagnostic Information: 1. Monitor traffic towards the cache pod using the KPI Dashboard. 2. Refer to rate of the following metric on the Grafana dashboard: ocscp_load_manager_queue_utilization. Recovery: The alert is cleared automatically when traffic falls below a critical threshold. For any assistance, contact My Oracle Support.

6.3.61 SCPProducerNfSetUnhealthy

Table 6-65 SCPProducerNfSetUnhealthy

Field	Details
Description	All producer NFs in NF set are marked unhealthy
Summary	Summary: 'All producer NFs in NF set are marked unhealthy. nfSet: {{\$labels.ocscp_nf_setid}}, scpFqdn: {{\$labels.scp_fqdn}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Info
Condition	This alert is raised when all producer NFs in an NF Set are marked unhealthy. ocscp_metric_nf_set_unhealthy == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.7027
Metric Used	ocscp_metric_nf_set_unhealthy

Table 6-65 (Cont.) SCPProducerNfSetUnhealthy

Field	Details
Recommended Action	Cause: All the producer NFs are marked unhealthy because of consecutive failure responses. Diagnostic Information: 1. Check transport failures and routing errors on producer NFs. 2. Run the ping command from primary or secondary nodes using IP of Service. Sample command: ping <IPAddress>. 3. If FQDN of service is used, run the ping command from inside the pod. 4. If the pod does not support the ping command, get the debug container of SCP pod. 5. If you do not want to use the ping command, collect tcpdump to establish the connection. Sample command: tcpdump -w capture.pcap -i <pod interface> Recovery: This alert is automatically cleared after the degradation time is over. Degradation time = Number of consecutive degradations multiplied by configured base ejection. For any assistance, contact My Oracle Support.

6.3.62 SCPPeerSeppUnhealthy

Table 6-66 SCPPeerSeppUnhealthy

Field	Details
Description	Peer Sepp is marked unhealthy
Summary	Peer Sepp is marked unhealthy. seppFqdn: {{\$labels.ocscp_sepp_fqdn}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Info
Condition	ocscp_sepp_unhealthy == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.7028
Metric Used	ocscp_sepp_unhealthy

Table 6-66 (Cont.) SCPPeerSeppUnhealthy

Field	Details
Recommended Action	Cause: The peer SEPP is marked unhealthy because of consecutive failure responses. Diagnostic Information: 1. Check transport failures and routing errors on peer SCP. 2. Run the ping command from primary or secondary nodes using IP of Service. Sample command: ping <IPAddress>. 3. If FQDN of service is used, run the ping command from inside the pod. 4. If the pod does not support the ping command, get the debug container of SCP pod. 5. If you do not want to use the ping command, collect tcpdump to establish the connection. Sample command: tcpdump -w capture.pcap -i <pod interface> Recovery: This alert is automatically cleared after the degradation time is over. Degradation time = Number of consecutive degradations multiplied by configured base ejection. For any assistance, contact My Oracle Support.

6.3.63 SCPMicroServiceUnreachable

Table 6-67 SCPMicroServiceUnreachable

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}: SCP communication between the micro-services indicated by source and destination has failed'
Summary	Summary: 'SCP communication between the micro-services indicated by source and destination has failed: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, source:{{\$labels.source}}, destination: {{\$labels.destination}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }{'
Severity	Critical
Condition	This alert is raised when the communication between SCP microservices indicated by source and destination has failed. ocscp_metric_svc_unreachable==1
OID	1.3.6.1.4.1.323.5.3.35.1.2.7029
Metric Used	ocscp_metric_svc_unreachable
Recommended Action	Cause: Communication between SCP microservices has failed. Diagnostic Information: Verify whether endpoints of all the services are in Running and Ready state. If not, restart the services. Recovery: This alert clears automatically when the required services are in Running and Ready state. For any assistance, contact My Oracle Support.

6.3.64 SCPTrafficFeedSendFailed

Table 6-68 SCPTrafficFeedSendFailed

Field	Details
Description	Sending messages to Traffic Feed failed. Cause : {{\$labels.ocscp_cause}}
Summary	Sending messages to Traffic Feed failed, cause: {{\$labels.ocscp_cause}}, scp_fqdn: {{\$labels.ocscp_fqdn}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}
Severity	Minor
Condition	increase(ocscp_metric_trafficfeed_failed_total{app_kubernetes_io_name="scp-worker"}[1h]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.9003
Metric Used	ocscp_metric_trafficfeed_failed_total
Recommended Action	Cause: Sending of message to traffic feed failed. Diagnostic Information: - Check failure reason. - Check if the traffic feed OCNADD configuration is correct. - Check if the OCNADD server is reachable and available. Recovery: This alert clears automatically after 24 hrs if sending messages to traffic feed stops failing. For any assistance, contact My Oracle Support.

6.3.65 SCPTrafficFeedKafkaClusterUnhealthy

Table 6-69 SCPTrafficFeedKafkaClusterUnhealthy

Field	Details
Description	'Kafka cluster is marked unhealthy, Cause : {{\$labels.ocscp_cause}}'
Summary	'Kafka cluster is marked unhealthy, cause: {{\$labels.ocscp_cause}}, scp_fqdn: {{\$labels.ocscp_fqdn}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when the Kafka cluster is unhealthy. ocscp_metric_trafficfeed_cluster_unhealthy == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9026
Metric Used	ocscp_metric_trafficfeed_cluster_unhealthy
Recommended Action	Cause: The Kafka cluster is unhealthy. Diagnostic Information: Check and diagnose OCNADD Kafka cluster. Recovery: This alert clears when the Kafka cluster recovers from the failure condition. For any assistance, contact My Oracle Support.

6.3.66 SCPTrafficFeedPartitionUnhealthy

Table 6-70 SCPTrafficFeedPartitionUnhealthy

Field	Details
Description	'Kafka partition {{labels.kafka_partition_id}} is marked unhealthy, Cause : {{labels.ocscp_cause}}'
Summary	'Kafka cluster is marked unhealthy, cause: {{labels.ocscp_cause}}, partition_id: {{labels.kafka_partition_id}}, topic: {{labels.topic}}, scp_fqdn: {{labels.ocscp_fqdn}}, namespace: {{labels.namespace}}, podname: {{labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alert is raised when the Kafka partition is unhealthy. ocscp_metric_trafficfeed_partition_unhealthy == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9025
Metric Used	ocscp_metric_trafficfeed_partition_unhealthy
Recommended Action	Cause: The Kafka partition is unhealthy. Diagnostic Information: Check and diagnose OCNADD Kafka cluster. Recovery: This alert clears when the Kafka partition recovers from the failure condition. For any assistance, contact My Oracle Support .

6.3.67 SCPServiceMeshFailure

Table 6-71 SCPServiceMeshFailure

Field	Details
Description	'SCP servicemesh failure encountered'
Summary	'SCP servicemesh failure encountered for nfservicetype: {{labels.ocscp_nf_service_type}}, nftype: {{labels.ocscp_nf_type}}, nfinstanceid: {{labels.ocscp_nf_instance_id}}, serviceinstanceid: {{labels.ocscp_service_instance_id}}, producerfqdn: {{labels.ocscp_producer_host}}, responsecode: {{labels.ocscp_response_code}}, serverheader: {{labels.ocscp_server_header}}, namespace: {{labels.namespace}}, podname: {{labels.pod}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'SeverityInfo
Severity	Info
Condition	This alert is raised when service mesh failure occurs. increase(ocscp_metric_sidecarproxy_failures_total[2m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.7030
Metric Used	ocscp_metric_sidecarproxy_failures_total

Table 6-71 (Cont.) SCPServiceMeshFailure

Field	Details
Recommended Action	Cause: Service mesh failure observed at SCP. Diagnostic Information: - Service mesh is unable to reach peer NF due to connection failures or host is not known to service mesh or some other errors at service mesh. - Verify the service mesh logs to detect error details. - Check sidecar status of peer NF. Recovery: This alert clears automatically after 2 minutes if there is no service mesh failure observed by SCP with the same dimensions. For any assistance, contact My Oracle Support.

6.3.68 SCPHealthCheckFailedForPeerSCP

Table 6-72 SCPHealthCheckFailedForPeerSCP

Field	Details
Description	'SCP HealthCheck failed for peer SCP'
Summary	'SCP HealthCheck failed for peer SCP. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Info
Condition	This alert is raised when peer SCP or inter-SCP becomes unhealthy due to health check status and outlier detection. ocscp_interscp_health_check_status_failed == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9023
Metric Used	ocscp_interscp_health_check_status_failed
Recommended Action	Cause: When peer SCP is unhealthy to receive any SBI message requests due to health check and outlier detection. Diagnostic Information: - Monitor if the overall average load of peer SCP is greater than the configured threshold value. - Check outlier detection. Recovery: This alert clears automatically if SCP-C decides SCP-P is healthy or available based on the current and previous status of outlier detection and health check. For any assistance, contact My Oracle Support.

6.3.69 SCPHealthCheckFailed

Table 6-73 SCPHealthCheckFailed

Field	Details
Description	'SCP HealthCheck failed'
Summary	'SCP HealthCheck failed. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'

Table 6-73 (Cont.) SCPHealthCheckFailed

Field	Details
Severity	Info
Condition	This alert is raised when SCP is unhealthy because the overall average load of SCP is greater than the configured threshold. ocscp_health_check_status_failed == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.9024
Metric Used	ocscp_health_check_status_failed
Recommended Action	Cause: When SCP is unhealthy to receive any SBI message requests due to the overall average load. Diagnostic Information: Monitor if the overall average load of SCP is greater than the configured threshold value. Recovery: This alert clears automatically when the overall average load of SCP is less than the configured threshold value. For any assistance, contact My Oracle Support .

6.3.70 ScpWorkerPodPendingTransUtilizationAboveWarnThreshold

Table 6-74 ScpWorkerPodPendingTransUtilizationAboveWarnThreshold

Field	Details
Description	Worker Pending Transaction lead to Warn level
Summary	'Worker Pending Transaction lead to warn level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Warn
Condition	This alert is raised when pending transaction utilization of SCP-Worker reaches WARN level. ocscp_worker_pod_overload_control_pendingTrans_utilization_warn > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.9014
Metric Used	ocscp_worker_pod_overload_control_pendingTrans_utilization_warn
Recommended Action	Cause: When pending transactions utilization of SCP-Worker reaches WARN level. Diagnostic Information: - Monitor pending transactions usage while processing traffic. The threshold value of warn pending transaction utilization can be checked from database. - Check WARN level logs of SCP-Worker for pending transaction status. Recovery: This alert clears automatically when pending transaction utilization is below WARN threshold level. For any assistance, contact My Oracle Support .

6.3.71 ScpWorkerPodPendingTransUtilizationAboveMinorThreshold

Table 6-75 ScpWorkerPodPendingTransUtilizationAboveMinorThreshold

Field	Details
Description	Worker Pending Transaction lead to minor level

Table 6-75 (Cont.) ScpWorkerPodPendingTransUtilizationAboveMinorThreshold

Field	Details
Summary	'Worker Pending Transaction lead to minor level.namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }'
Severity	Minor
Condition	This alert is raised when pending transaction utilization of SCP-Worker reaches MINOR level. ocscp_worker_pod_overload_control_pendingTrans_utilization_minor > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.9014
Metric Used	ocscp_worker_pod_overload_control_pendingTrans_utilization_minor
Recommended Action	Cause: When pending transactions utilization of SCP-Worker reaches MINOR level. Diagnostic Information: - Monitor pending transactions usage while processing traffic. The threshold value of minor pending transaction utilization can be checked from database. - Check MINOR level logs of SCP-Worker for pending transaction status. Recovery: This alert clears automatically when pending transaction utilization is below MINOR threshold level. For any assistance, contact My Oracle Support .

6.3.72 ScpWorkerPodPendingTransUtilizationAboveMajorThreshold

Table 6-76 ScpWorkerPodPendingTransUtilizationAboveMajorThreshold

Field	Details
Description	Worker Pending Transaction lead to major level
Summary	'Worker Pending Transaction lead to major level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }'
Severity	Major
Condition	This alert is raised when pending transaction utilization of SCP-Worker reaches MAJOR level. ocscp_worker_pod_overload_control_pendingTrans_utilization_major > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.9014
Metric Used	ocscp_worker_pod_overload_control_pendingTrans_utilization_major
Recommended Action	Cause: When pending transactions utilization of SCP-Worker reaches MAJOR level. Diagnostic Information: - Monitor pending transactions usage while processing traffic. The threshold value of major pending transaction utilization can be checked from database. - Check MAJOR level logs of SCP-Worker for pending transaction status. Recovery: This alert clears automatically when pending transaction utilization is below MAJOR threshold level. For any assistance, contact My Oracle Support .

6.3.73 ScpWorkerPodPendingTransUtilizationAboveCriticalThreshold

Table 6-77 ScpWorkerPodPendingTransUtilizationAboveCriticalThreshold

Field	Details
Description	Worker Pending Transaction lead to critical level
Summary	'Worker Pending Transaction lead to critical level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when pending transaction utilization of SCP-Worker reaches CRITICAL level. ocscp_worker_pod_overload_control_pendingTrans_utilization_critical > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.9014
Metric Used	ocscp_worker_pod_overload_control_pendingTrans_utilization_critical
Recommended Action	Cause: When pending transactions utilization of SCP-Worker reaches CRITICAL level. Diagnostic Information: - Monitor pending transactions usage while processing traffic. The threshold value of critical pending transaction utilization can be checked from database. - Check CRITICAL level logs of SCP-Worker for pending transaction status. Recovery: This alert clears automatically when pending transaction utilization is below CRITICAL threshold level. For any assistance, contact My Oracle Support.

6.3.74 ScpWorkerPodResourceUtilizationAboveMinorThreshold

Table 6-78 ScpWorkerPodResourceUtilizationAboveMinorThreshold

Field	Details
Description	Worker overload control lead to minor level
Summary	'Worker overload control lead to minor level.namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Minor
Condition	This alert is raised when overload control resource utilization of SCP-Worker reaches MINOR level. ocscp_worker_pod_overload_control_resource_utilization_minor > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.9018
Metric Used	ocscp_worker_pod_overload_control_resource_utilization_minor

Table 6-78 (Cont.) ScpWorkerPodResourceUtilizationAboveMinorThreshold

Field	Details
Recommended Action	Cause: When overload control resource utilization of SCP-Worker reaches MINOR level. Diagnostic Information: - Monitor pending transactions usage while processing traffic. The threshold value of minor overload control resource utilization can be checked from database. - Check MINOR level logs of SCP-Worker for overload control resource utilization status. Recovery: This alert clears automatically when overload control resource utilization is below MINOR threshold level. For any assistance, contact My Oracle Support.

6.3.75 ScpWorkerPodResourceUtilizationAboveMajorThreshold

Table 6-79 ScpWorkerPodResourceUtilizationAboveMajorThreshold

Field	Details
Description	Worker overload control lead to major level
Summary	'Worker overload control lead to major level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alert is raised when overload control resource utilization of SCP-Worker reaches MAJOR level. ocscp_worker_pod_overload_control_resource_utilization_major > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.9018
Metric Used	ocscp_worker_pod_overload_control_resource_utilization_major
Recommended Action	Cause: When overload control resource utilization of SCP-Worker reaches MAJOR level. Diagnostic Information: - Monitor pending transactions usage while processing traffic. The threshold value of major overload control resource utilization can be checked from database. - Check MAJOR level logs of SCP-Worker for overload control resource utilization status. Recovery: This alert clears automatically when overload control resource utilization is below MAJOR threshold level. For any assistance, contact My Oracle Support.

6.3.76 ScpWorkerPodResourceUtilizationAboveWarnThreshold

Table 6-80 ScpWorkerPodResourceUtilizationAboveWarnThreshold

Field	Details
Description	'Worker overload control lead to Warn level'
Summary	'Worker overload control lead to warn level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'

Table 6-80 (Cont.) ScpWorkerPodResourceUtilizationAboveWarnThreshold

Field	Details
Severity	Warning
Condition	This alert is raised when overload control resource utilization of SCP-Worker reaches WARN level. ocscp_worker_pod_overload_control_resource_utilization_warn > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.9018
Metric Used	ocscp_worker_pod_overload_control_resource_utilization_warn
Recommended Action	Cause: When overload control resource utilization of SCP-Worker reaches WARN level. Diagnostic Information: - Monitor pending transactions usage while processing traffic. The threshold value of warn overload control resource utilization can be checked from database. - Check WARN level logs of SCP-Worker for overload control resource utilization status. Recovery: This alert clears automatically when overload control resource utilization is below WARN threshold level. For any assistance, contact My Oracle Support.

6.3.77 ScpWorkerPodResourceUtilizationAboveCriticalThreshold

Table 6-81 ScpWorkerPodResourceUtilizationAboveCriticalThreshold

Field	Details
Description	Worker overload control lead to critical level
Summary	"Worker overload control lead to critical level. namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}"
Severity	Critical
Condition	This alert is raised when overload control resource utilization of SCP-Worker reaches CRITICAL level. ocscp_worker_pod_overload_control_resource_utilization_critical > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.9018
Metric Used	ocscp_worker_pod_overload_control_resource_utilization_critical
Recommended Action	Cause: When overload control resource utilization of SCP-Worker reaches CRITICAL level. Diagnostic Information: - Monitor pending transactions usage while processing traffic. The threshold value of critical overload control resource utilization can be checked from database. - Check CRITICAL level logs of SCP-Worker for overload control resource utilization status. Recovery: This alert clears automatically when overload control resource utilization is below CRITICAL threshold level. For any assistance, contact My Oracle Support.

6.3.78 SCPDNSSRVNRFMigrationTaskFailure

Table 6-82 SCPDNSSRVNRFMigrationTaskFailure

Field	Description
Severity	critical
Condition	ocscp_configuration_dnssrv_nrf_migration_task_failure == 1
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15001
Description	An alert is raised to notify that migration from static to DNS has failed.
Recommended Actions	Cause: - If migration to DNS task was waiting for DNS SRV data and wait time elapsed. - If any migration task fails due to no acknowledgement from other microservices. - Wait time elapsed in task completion response for any migration task. Diagnostic Information: Monitor that all the DNS SRV configurations are proper and that all SCP pods are up and running in the proper state. Recovery: - DNS SRV data, wait time elapsed: Once data is received from DNS, the alert will be cleared. - No acknowledgement: Keep retrying for success acknowledgement and clear or remove the alert on receiving success acknowledgement. - Wait time elapsed for completion response: Resend the event and wait. Repeat this until a completion response is received, and on receiving a completion response, clear the alert. In all the raised conditions, the alert will also be cleared on receiving the new migration task. For any assistance, contact My Oracle Support.

6.3.79 SCPDNSSRVNRFNonMigrationTaskFailure

Table 6-83 SCPDNSSRVNRFNonMigrationTaskFailure

Field	Description
Severity	critical
Condition	ocscp_configuration_dnssrv_nrf_non_migration_task_failure == 1
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15003
Description	An alert is raised to notify that the non-migrated task has failed.
Recommended Actions	Cause: - If a non-migrated task fails due to no acknowledgement from other microservices. - Wait time elapsed in task completion response. Diagnostic Information: Monitor that all the DNS SRV configurations are proper and that all SCP pods are up and running in the proper state. Recovery: - No acknowledgement: Keep retrying for success acknowledgement and clear or remove the alert on receiving success acknowledgement. - Wait time elapsed: When a new task is submitted for the same SPN, this alert is immediately cleared; if subsequent task processing fails, again, the alert will be raised. For any assistance, contact My Oracle Support.

6.3.80 SCPDNSSRVNRFDuplicateTargetDetected

Table 6-84 SCPDNSSRVNRFDuplicateTargetDetected

Field	Description
Severity	critical
Condition	ocscp_configuration_dnssrv_nrf_duplicate_target_detected == 1
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15002
Description	An alert is raised to notify that a duplicate target NRF has been detected in the DNS SRV records.
Recommended Actions	Cause: This alert is raised when a duplicate target FQDN is received from the DNS SRV for different NRF SRV FQDN(s). In this case, the target FQDNs received against the first NRF SRV FQDN in the scpc-configuration service from the scpc-alternate-resolution service shall be processed, but the target FQNDs received against the subsequent NRF SRV FQDN will be ignored, and this alert shall be raised. Diagnostic Information: Monitor that all the DNS SRV configurations are proper and that all SCP pods are up and running in the proper state. Recovery: If for the same NRF SRV FQDN receives non-overlapping target FQDNs, then the alert will be cleared. For any assistance, contact My Oracle Support.

6.3.81 SCPHighResponseTimeFromProducer

Table 6-85 SCPHighResponseTimeFromProducer

Field	Description
Description	It notifies when the traffic exceeds 200 messages per second and the response delay from the Producer NF takes more than 50 seconds.
Summary	More than 200 responses received by the SCP have a response time exceeding 50,000 milliseconds. Instance name: {{\$labels.instance}}, Namespace: {{\$labels.namespace}}, Pod name: {{\$labels.pod}}, Timestamp: {{ with query "time()" }} {{ . first value humanizeTimestamp }}{{ end }}
Severity	Info
Condition	(sum(rate(ocscp_metric_upstream_service_time_total{ocscp_upstream_service_time="50000ms"}[2m])) by (kubernetes_namespace) + sum(rate(ocscp_metric_upstream_service_time_total{ocscp_upstream_service_time=">50000ms"}[2m])) by (kubernetes_namespace)) > 200
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15004
Metric Used	ocscp_metric_upstream_service_time_total

Table 6-85 (Cont.) SCPHighResponseTimeFromProducer

Field	Description
Recommended Actions	Cause: More than 200 messages per second have an upstream response time above 50 seconds. Diagnostic Information: Monitor metric metricocscp_metric_upstream_service_time_total with ocscp_upstream_service_time="50000ms" and ocscp_upstream_service_time=">50000ms". Recovery: The alert is cleared automatically when the number of responses with delays exceeding 50 seconds falls below 200 messages per second. If the alert does not clear, check for any producer NFs or specific service request types that are taking more than 50 seconds to respond and take corrective actions if necessary. Note that immediate action may not be required, as this alert is informational. However, a high number of requests with long response delays could lead to performance degradation at the SCP. For any assistance, contact My Oracle Support.

6.3.82 SCPCGroupVersionDetectionFailed

Table 6-86 SCPCGroupVersionDetectionFailed

Field	Description
Severity	critical
Condition	ocscp_worker_cgroup_version_detection_failed == 1
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15005
Description	Notify that cgroup version detection has failed.
Recommended Actions	Cause: SCP is unable to detect the cgroup version from the underlying kernel with the command "stat -fc %T /sys/fs/cgroup/." The possible expected value is either tmpfs or cgroup2fs. Diagnostic Information: - Option 1: Check worker error level logs for failure of cgroup version detection. - Option 2: - Login to the worker pod and run the command "stat -fc %T /sys/fs/cgroup." - Verify whether it outputs either tmpfs or cgroup2fs. Recovery: - Make sure the cgroup has either tmpfs or cgroup2fs. - Do same version upgrade on SCP. For any assistance, contact My Oracle Support.

6.3.83 SCPCPUUsageFileReadFailed

Table 6-87 SCPCPUUsageFileReadFailed

Field	Description
Severity	critical
Condition	ocscp_worker_cpu_usage_file_read_failed == 1
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15006

Table 6-87 (Cont.) SCPCPUUsageFileReadFailed

Field	Description
Description	Notify that the CPU usage file read operation failed within the detected cgroup version.
Recommended Actions	Cause: SCP encountered a failure in performing a read operation for the CPU usage file within the detected cgroup version. The file path is determined based on the detected cgroup version. Diagnostic Information: - Option 1: Check worker warn level logs for failure in performing a read operation for the CPU usage file. - Option 2: - Log in to the worker pod and run the command "stat -fc %T /sys/fs/cgroup" to confirm whether it outputs either 'tmpfs' or 'cgroup2fs'. - Depending on the detected cgroup version, inspect the file located at /sys/fs/cgroup/cpu/cpuacct.usage for 'tmpfs' or /sys/fs/cgroup/cpu.stat for 'cgroup2fs'. - Ensure that the file exists at the specified path and possesses the required permissions for read operations. Recovery: - Verify that the files are appropriate according to the cgroup version and possess the necessary permissions for read operations. - Perform the same version upgrade on the SCP. For any assistance, contact My Oracle Support.

6.3.84 SCPIgnoreUnknownService

Table 6-88 SCPIgnoreUnknownService

Field	Description
Severity	Info
Condition	increase(ocscp_ignore_unknown_service_total[24h]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15000
Description	An alert is raised to notify that SCP ignored an unknown service in the NF profile.
Recommended Actions	Cause: SCP has received the NF profile with an unknown service and processed the profile by ignoring this unknown service. Diagnostic Information: Check the received NF profile for the unknown services. Recovery: If the unknown services are not present in the NF profile in the next scrapping interval, then the alert will be cleared. For any assistance, contact My Oracle Support.

6.3.85 SCPWorkerSSLCertificateOnCriticalExpiry

Table 6-89 SCPWorkerSSLCertificateOnCriticalExpiry

Field	Description
Severity	Critical
Condition	ocscp_metric_ssl_certificate_expire_total == 1

Table 6-89 (Cont.) SCPWorkerSSLCertificateOnCriticalExpiry

Field	Description
OID used for SNMP Traps	11.3.6.1.4.1.323.5.3.35.1.2.15010
Description	An alert is raised whenever the SCP SSL certificate is about to expire, based on the configured threshold values.
Recommended Actions	Cause: The SSL certificate expiration is approaching the configured critical expiry time. Diagnostic Information: - Whenever this alert is raised, it indicates that the SSL certificates configured for SCP are about to expire. - Verify the certificate expiry date. Recovery: The SCP SSL secret needs to be updated with renewed SSL certificates. For any assistance, contact My Oracle Support.

6.3.86 SCPWorkerSSLCertificateOnMajorExpiry

Table 6-90 SCPWorkerSSLCertificateOnMajorExpiry

Field	Description
Severity	major
Condition	ocscp_metric_ssl_certificate_expire_total == 2
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15011
Description	An alert is raised whenever the SCP SSL certificate is about to expire, based on the configured threshold values.
Recommended Actions	Cause: The SSL certificate expiration is approaching the configured major expiry time. Diagnostic Information: - Whenever this alert is raised, it indicates that the SSL certificates configured for SCP are about to expire. - Verify the certificate expiry date. Recovery: The SCP SSL secret needs to be updated with renewed SSL certificates. For any assistance, contact My Oracle Support.

6.3.87 SCPWorkerSSLCertificateOnMinorExpiry

Table 6-91 SCPWorkerSSLCertificateOnMinorExpiry

Field	Description
Severity	minor
Condition	ocscp_metric_ssl_certificate_expire_total == 3
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15012
Description	An alert is raised whenever the SCP SSL certificate is about to expire, based on the configured threshold values.

Table 6-91 (Cont.) SCPWorkerSSLCertificateOnMinorExpiry

Field	Description
Recommended Actions	Cause: The SSL certificate expiration is approaching the configured minor expiry time. Diagnostic Information: - Whenever this alert is raised, it indicates that the SSL certificates configured for SCP are about to expire. - Verify the certificate expiry date. Recovery: The SCP SSL secret needs to be updated with renewed SSL certificates. For any assistance, contact My Oracle Support.

6.3.88 SCPIngressConnectionEstablishmentFailure

Table 6-92 SCPIngressConnectionEstablishmentFailure

Field	Description
Severity	info
Condition	increase(ocscp_worker_https_ingress_connection_failure_total[2m]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15007
Description	An alert is raised whenever any ingress HTTPS connection is failed.
Recommended Actions	Cause: Whenever an Ingress HTTPS connection establishment fails. Diagnostic Information: This alert may be raised if any connection establishment fails or if a handshake fails. Recovery: The alert will be cleared if there are no ingress HTTPS connection failures in the next scrape interval (2 minutes). For any assistance, contact My Oracle Support.

6.3.89 SCPEgressConnectionEstablishmentFailure

Table 6-93 SCPEgressConnectionEstablishmentFailure

Field	Description
Severity	info
Condition	increase(ocscp_worker_https_egress_connection_failure_total[2m]) > 0
OID used for SNMP Traps	1.3.6.1.4.1.323.5.3.35.1.2.15008
Description	An alert is raised whenever any egress HTTPS connection is failed.
Recommended Actions	Cause: Whenever an egress HTTPS connection establishment fails to send the request to producer NFs. Diagnostic Information: This alert may be raised if any connection establishment fails or if a handshake fails. Recovery: The alert will be cleared if there are no engress HTTPS connection failures in the next scrape interval (2 minutes). For any assistance, contact My Oracle Support.

6.3.90 SCPNrfProxyOauthQueuesUtilizationAboveMinorThreshold

Table 6-94 SCPNrfProxyOauthQueuesUtilizationAboveMinorThreshold

Field	Details
Description	description: 'instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}: SCP NrfProxyOauth Queues Utilization Above Minor Threshold'
Summary	'SCP NrfProxy Oauth Queues Utilization Above Minor Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Minor
Condition	This alert is raised when SCP NrfProxy Oauth Queues Utilization is above the minor threshold. ocscp_nrfproxy_oauth_queue_alert{severity="MINOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.14000
Metric Used	ocscp_nrfproxy_oauth_queue_alert
Recommended Action	Cause: When NrfProxy Task queues are filled, the traffic exceeds the limit. Diagnostic Information: - Monitor the traffic toward nrfProxy to pod using the Grafana dashboard. - Refer to the rate of ocscp_nrfproxy_oauth_queue_alert metric on the Grafana dashboard. Recovery: This alert clears automatically when the traffic decreases below the Major threshold. For any assistance, contact My Oracle Support.

6.3.91 SCPNrfProxyOauthQueuesUtilizationAboveMajorThreshold

Table 6-95 SCPNrfProxyOauthQueuesUtilizationAboveMajorThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}: SCP NrfProxyOauth Queues Utilization Above Major Threshold'
Summary	'SCP NrfProxy Oauth Queues Utilization Above Major Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alert is raised when SCP NrfProxy Oauth Queues Utilization is above the major threshold. ocscp_nrfproxy_oauth_queue_alert{severity="MAJOR"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.14000
Metric Used	ocscp_nrfproxy_oauth_queue_alert

Table 6-95 (Cont.) SCPNrfProxyOauthQueuesUtilizationAboveMajorThreshold

Field	Details
Recommended Action	Cause: When NrfProxy Task queues are filled, the traffic exceeds the limit. Diagnostic Information: - Monitor the traffic toward nrfProxy to pod using the Grafana dashboard. - Refer to the rate of ocscp_nrfproxy_oauth_queue_alert metric on the Grafana dashboard. Recovery: This alert clears automatically when the traffic decreases below the Major threshold. For any assistance, contact My Oracle Support.

6.3.92 SCPNrfProxyOauthQueuesUtilizationAboveCriticalThreshold

Table 6-96 SCPNrfProxyOauthQueuesUtilizationAboveCriticalThreshold

Field	Details
Description	'instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}: SCP NrfProxy Oauth Queues Utilization Above Critical Threshold'
Summary	'SCP NrfProxy Oauth Queues Utilization Above Critical Threshold, instancename: {{\$labels.instance}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when SCP NrfProxy Oauth Queues Utilization is above the critical threshold. ocscp_nrfproxy_oauth_queue_alert{severity="CRITICAL"} == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.14000
Metric Used	ocscp_nrfproxy_oauth_queue_alert
Recommended Action	Cause: When NrfProxy Task queues are filled, the traffic exceeds the limit. Diagnostic Information: - Monitor the traffic toward nrfProxy to pod using the Grafana dashboard. - Refer to the rate of ocscp_nrfproxy_oauth_queue_alert metric on the Grafana dashboard. Recovery: This alert clears automatically when the traffic decreases below the critical threshold. For any assistance, contact My Oracle Support.

6.3.93 ScpSelfOCIThresholdAboveWarn

Table 6-97 ScpSelfOCIThresholdAboveWarn

Field	Details
Description	An alert is raised whenever the configured self-OCI for SCP reaches a warn level.
Summary	SCP load level lead to Warn level. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}
Severity	warning

Table 6-97 (Cont.) ScpSelfOCIThresholdAboveWarn

Field	Details
Condition	increase(ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_t hreshold_level="WARN"}[2m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.15013
Metric Used	ocscp_worker_self_oci_above_oci_conveyance_threshold_total
Recommended Action	Cause: Whenever the configured self-OCI for SCP reaches a warn level. Diagnostic Information: SCP may be experiencing high load. Recovery: The alert will clear automatically when the load on SCP decreases and falls below the configured warn level. For any assistance, contact My Oracle Support .

6.3.94 ScpSelfOCIThresholdAboveMinor

Table 6-98 ScpSelfOCIThresholdAboveMinor

Field	Details
Description	An alert is raised whenever the configured self-OCI for SCP reaches a minor level.
Summary	SCP load level lead to Minor level. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	minor
Condition	increase(ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_t hreshold_level="MINOR"}[2m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.15014
Metric Used	ocscp_worker_self_oci_above_oci_conveyance_threshold_total
Recommended Action	Cause: Whenever the configured self-OCI for SCP reaches a minor level. Diagnostic Information: SCP may be experiencing high load. Recovery: The alert will clear automatically when the load on SCP decreases and falls below the configured minor level. For any assistance, contact My Oracle Support .

6.3.95 ScpSelfOCIThresholdAboveMajor

Table 6-99 ScpSelfOCIThresholdAboveMajor

Field	Details
Description	An alert is raised whenever the configured self-OCI for SCP reaches a major level.
Summary	SCP load level lead to Major level. namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	major
Condition	increase(ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_t hreshold_level="MAJOR"}[2m]) > 0

Table 6-99 (Cont.) ScpSelfOCIThresholdAboveMajor

Field	Details
OID	1.3.6.1.4.1.323.5.3.35.1.2.15015
Metric Used	ocscp_worker_self_oci_above_oci_conveyance_threshold_total
Recommended Action	Cause: Whenever the configured self-OCI for SCP reaches a major level. Diagnostic Information: SCP may be experiencing high load. Recovery: The alert will clear automatically when the load on SCP decreases and falls below the configured major level. For any assistance, contact My Oracle Support.

6.3.96 ScpSelfOCIThresholdAboveCritical

Table 6-100 ScpSelfOCIThresholdAboveCritical

Field	Details
Description	This alert will be activated whenever the configured self-OCI for SCP reaches a critical level.
Summary	SCP load level lead to Critical level. namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }} {{ . first value humanizeTimestamp }} {{ end }}
Severity	critical
Condition	increase(ocscp_worker_self_oci_above_oci_conveyance_threshold_total{ocscp_oci_threshold_level="CRITICAL"}[2m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.15016
Metric Used	ocscp_worker_self_oci_above_oci_conveyance_threshold_total
Recommended Action	Cause: Whenever the configured self-OCI for SCP reaches a critical level. Diagnostic Information: SCP may be experiencing high load. Recovery: The alert will clear automatically when the load on SCP decreases and falls below the configured critical level. For any assistance, contact My Oracle Support.

6.3.97 SCPWorkerSSLPartialSecret

Table 6-101 SCPWorkerSSLPartialSecret

Field	Details
Description	SCP Worker SSL Secret is Invalid or Partial'
Summary	'SCP Worker SSL Secret is Invalid or Partial, ocscp_worker_fqdn: {{ \$labels.ocscp_producer_host }}, scpfdn: {{ \$labels.ocscp_fqdn }}, namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }} {{ . first value humanizeTimestamp }} {{ end }}', secretName: {{ \$labels.secretName }} {{ . first value humanizeTimestamp }} {{ end }}'
Severity	Major

Table 6-101 (Cont.) SCPWorkerSSLPartialSecret

Field	Details
Condition	This alert is raised when a Kubernetes secret is created or patched with incomplete information. A Kubernetes secret contains private key, certificate, CA bundle, truststore, and keystore password files. If any of these components are missing during creation or patching, this alert is raised. ocscp_worker_ssl_partial_secret == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.15017
Metric Used	ocscp_worker_ssl_partial_secret
Recommended Action	Cause: When a Kubernetes secret is created or patched with incomplete information. Diagnostic Information: Verify the patched secret whether it contains all the required data. Recovery: Alert is cleared automatically when valid secret is patched which contains all the data. For any assistance, contact My Oracle Support .

6.3.98 SCPWorkerAndNFTimeSyncFailure

Table 6-102 SCPWorkerAndNFTimeSyncFailure

Field	Details
Description	'Consumer NF and SCP are not time synchronized'
Summary	Consumer NF and SCP are not time synchronized: consumernfinstanceid = {{ \$labels.ocscp_consumer_nf_type }}, consumernfinstanceid = {{ \$labels.ocscp_consumer_nf_instance_id }}, namespace: {{ \$labels.namespace }}, podname: {{ \$labels.pod }}, scpfdn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}
Severity	Major
Condition	This alert is raised when there is a time synchronization difference between SCP-Worker and the consumer NF received request with the timestamp_headers_support feature is enabled. increase(ocscp_worker_timestamp_headers_validation_fail_total{ocscp_validation_failure="TIME_SYNC_FAILURE"}[2m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.15019
Metric Used	ocscp_worker_timestamp_headers_validation_fail_total
Recommended Action	Cause: When there is a time synchronization difference between SCP-Worker and the consumer NF received request with the timestamp_headers_support feature is enabled. Diagnostic Information: SCP may have received a request from the consumer NF which is not in time sync when the timestamp_headers_support is enabled. Recovery: Alert is cleared automatically when no such read failure occurs over the next scrape interval. For any assistance, contact My Oracle Support .

6.3.99 SCPCoherenceCacheHitsRateAboveThreshold

Table 6-103 SCPCoherenceCacheHitsRateAboveThreshold

Field	Details
Description	'SCP Coherence Cache Hits Rate above threshold (i.e. 220000 mps)'
Summary	'namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value printf "%.2f" }} mps which is above 220000'
Severity	Critical
Condition	This alert is raised when SCP Coherence cache rate exceeds the threshold (220000 MPS). sum(rate(coherence_cache_hits{app_kubernetes_io_name="scp-cache"}[2m])) by (kubernetes_namespace) > 220000
OID	1.3.6.1.4.1.323.5.3.35.1.2.7034
Metric Used	coherence_cache_hits
Recommended Action	Cause: When SCP Coherence cache rate exceeds the threshold (220000 MPS). Diagnostic Information: SCP Coherence cache rate exceeds the threshold (220000 MPS). Recovery: Alert is cleared automatically when SCP Coherence cache rate goes below the threshold during the next scrape interval. For any assistance, contact My Oracle Support .

6.3.100 SCPNotificationRequestsRateAboveThreshold

Table 6-104 SCPNotificationRequestsRateAboveThreshold

Field	Details
Description	'SCP Notification Requests are above threshold (i.e. 40 mps)'
Summary	'namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value printf "%.2f" }} mps which is above 40'
Severity	Critical
Condition	This alert is raised when the number of SCP notification requests exceeds the threshold (40 MPS). sum(rate(ocscp_notification_request_total{app_kubernetes_io_name="scpc-notification"}[2m])) by (kubernetes_namespace) > 40
OID	1.3.6.1.4.1.323.5.3.35.1.2.3012
Metric Used	ocscp_notification_request_total
Recommended Action	Cause: When the number of SCP notification requests exceeds the threshold (40 MPS). Diagnostic Information: SCP notification requests exceed the threshold (40 MPS). Recovery: Alert is cleared automatically when the number of SCP notification requests goes below the threshold during the next scrape interval. For any assistance, contact My Oracle Support .

6.3.101 SCPLciRxRateAboveThreshold

Table 6-105 SCPLciRxRateAboveThreshold

Field	Details
Description	description: 'LCI Rx Rate is above threshold (i.e. 150)'
Summary	'namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value printf "%.2f" }} mps which is above 150'
Severity	Critical
Condition	This alert is raised when LCI Rx rate exceeds the threshold, that is, 150. sum(rate(ocscp_metric_nf_lci_rx_total{app_kubernetes_io_name="scp-worker"}[2m])) by (kubernetes_namespace) > 150
OID	1.3.6.1.4.1.323.5.3.35.1.2.7032
Metric Used	ocscp_metric_nf_lci_rx_total
Recommended Action	Cause: When LCI Rx rate exceeds the threshold, that is, 150. Diagnostic Information: LCI Rx rate exceeds the threshold, that is, 150. Recovery: Alert is cleared automatically when LCI Rx rate goes below the threshold during the next scrape interval. For any assistance, contact My Oracle Support .

6.3.102 SCPOciRxRateAboveThreshold

Table 6-106 SCPOciRxRateAboveThreshold

Field	Details
Description	'OCI Rx Rate is above threshold (i.e. 5)'
Summary	'namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value printf "%.2f" }} mps which is above 5'
Severity	Critical
Condition	This alert is raised when OCI Rx rate exceeds the threshold, that is, 5. sum(rate(ocscp_metric_nf_oci_rx_total{app_kubernetes_io_name="scp-worker"}[2m])) by (kubernetes_namespace) > 5
OID	1.3.6.1.4.1.323.5.3.35.1.2.7033
Metric Used	ocscp_metric_nf_oci_rx_total
Recommended Action	Cause: When OCI Rx rate exceeds the threshold, that is, 5. Diagnostic Information: OCI Rx rate exceeds the threshold, that is, 5. Recovery: Alert is cleared automatically when OCI Rx rate goes below the threshold during the next scrape interval. For any assistance, contact My Oracle Support .

6.3.103 SCPTrafficRateAboveRatedThreshold

Table 6-107 SCPTrafficRateAboveRatedThreshold

Field	Details
Description	'Traffic Rate at SCP is above threshold (i.e. 730000 mps)'
Summary	'namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}: Current Traffic Rate is {{ \$value printf "%.2f" }} mps which is above 730000'
Severity	Critical
Condition	This alert is raised when the traffic rate at SCP exceeds the threshold, that is, 730000 MPS. (sum(rate(ocscp_metric_http_rx_req_total{app_kubernetes_io_name="scp-worker", ocscp_consumer_host!="OCSCP-INITIATED-MSG"}[2m])) by (kubernetes_namespace) + sum(rate(ocscp_metric_http_tx_req_total{app_kubernetes_io_name="scp-worker"}[2m])) by (kubernetes_namespace)) > 730000
OID	1.3.6.1.4.1.323.5.3.35.1.2.7031
Metric Used	ocscp_metric_http_rx_req_total
Recommended Action	Cause: When the traffic rate at SCP exceeds the threshold, that is, 730000 MPS. Diagnostic Information: The traffic rate at SCP exceeds the threshold, that is, 730000 MPS. Recovery: Alert is cleared automatically when the traffic rate goes below the threshold during the next scrape interval. For any assistance, contact My Oracle Support .

6.3.104 SCPMaxNFProfilesLimitExceeded

Table 6-108 SCPMaxNFProfilesLimitExceeded

Field	Details
Description	'NFs registered are more than the rated capacity (1200 NFs)'
Summary	'NFs registered are more than the rated capacity (1200 NFs) for namespace: {{\$labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alert is raised when the number of registered NFs exceeds the rated capacity (1200 NFs). sum(ocscp_notification_nf_profiles_count) by (kubernetes_namespace) > 1200
OID	1.3.6.1.4.1.323.5.3.35.1.2.3013
Metric Used	ocscp_notification_nf_profiles_count
Recommended Action	Cause: When registered NFs are more than the rated capacity (1200 NFs). Diagnostic Information: NFs registered are more than the rated capacity (1200 NFs). Recovery: The alert is cleared automatically when the number of registered NFs falls below the rated capacity (1200 NFs) during the next scrape interval. For any assistance, contact My Oracle Support .

6.3.105 SCPCustomRoamingProxyRoutingNotFound

Table 6-109 SCPCustomRoamingProxyRoutingNotFound

Field	Details
Description	'Custom Roaming Proxy is not configured for PLMN'
Summary	'Custom Roaming Proxy is not configured for PLMN. plmnid: {{\$labels.plmn_id}}, custom_roaming_proxy_nfType: {{\$labels.ocscp_custom_roaming_proxy_nf_type}}, scpfqdn: {{\$labels.scp_fqdn}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alert is raised when Custom Roaming Proxy is not configured for the PLMN ID. ocscp_worker_custom_roaming_proxy_not_found_current == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.15042
Metric Used	ocscp_worker_custom_roaming_proxy_not_found_current
Recommended Action	Cause: Custom Roaming Proxy routing related rules are not configured at SCP for selected PLMN in the inter-PLMN routing. Diagnostic Information: - Custom Roaming Proxy profile is not registered or Custom Roaming Proxy related configuration is not done at SCP. - Verify if the routing rules are created for selected inter-PLMN in the PLMN_ROAMING_PROXY_MAPPING table. Recovery: This alert is cleared automatically when the Custom Roaming Proxy related routing rules are created at SCP for the selected PLMN in the inter-PLMN routing. For any assistance, contact My Oracle Support.

6.3.106 SCPPeerCustomRoamingProxyUnhealthy

Table 6-110 SCPPeerCustomRoamingProxyUnhealthy

Field	Details
Description	Peer Custom Roaming Proxy is marked unhealthy
Summary	'Peer Custom Roaming Proxy is marked unhealthy. custom_roaming_proxy_fqdn: {{\$labels.ocscp_custom_roaming_proxy_fqdn}}, custom_roaming_proxy_nfType: {{\$labels.ocscp_custom_roaming_proxy_nf_type}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Info
Condition	This alert is raised when peer Custom Roaming Proxy is marked unhealthy. ocscp_worker_custom_roaming_proxy_unhealthy_current == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.15043
Metric Used	ocscp_worker_custom_roaming_proxy_unhealthy_current

Table 6-110 (Cont.) SCPPeerCustomRoamingProxyUnhealthy

Field	Details
Recommended Action	Cause: The peer Custom Roaming Proxy is marked unhealthy because of consecutive failure responses. Diagnostic Information: • Check transport failures and routing errors on peer SCP. • Use ping command (ping <IPAddress>) from primary or secondary nodes using IP address of the service. • If FQDN of the service is used, run the ping command inside the pod. • If the pod does not support ping command, use the Debug container of SCP pod. • Alternatively, collect tcpdump for ensuring proper connectivity. <pre>tcpdump -w capture.pcap -i <pod interface></pre> Recovery: This alert is automatically after the degradation time is over. Degradation time = number of consecutive degradations * configured base ejection. For any assistance, contact My Oracle Support.

6.3.107

SCPCustomRoamingProxyMaxViaHeaderProcessingCountExceeded

Table 6-111 SCPCustomRoamingProxyMaxViaHeaderProcessingCountExceeded

Field	Details
Description	'Proxy information count in Via header(s) exceeded the maximum via header proxy processing Limit.'
Summary	'Proxy information count in Via header(s) exceeded the maximum via header proxy processing Limit. max_via_header_processing_limit: {{\$labels.max_via_header_processing_limit}}, namespace: {{\$labels.labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Info
Condition	This alert is raised when the Via header processing count for Custom Roaming Proxy exceeds the configured limit. <pre>increase(ocscp_worker_custom_roaming_proxy_via_header_limit_exceeded_total[2m]) > 0</pre>
OID	1.3.6.1.4.1.323.5.3.35.1.2.15044
Metric Used	increase(ocscp_worker_custom_roaming_proxy_via_header_limit_exceeded_total)
Recommended Action	Cause: When the Custom Roaming Proxy maximum Via header processing count exceeded the configured limit. Diagnostic Information: Check if the number of Via headers in ingress request is not exceeding the configured limit in configuration for Custom Roaming Proxy. Recovery: This alert is cleared automatically when the request has less Via header than the configured limit per request for Custom Roaming Proxy. For any assistance, contact My Oracle Support.

6.3.108 SCPCustomRoamingProxyRoutingFailed

Table 6-112 SCPCustomRoamingProxyRoutingFailed

Field	Details
Description	'Sending message to Custom Roaming Proxy Failed'
Summary	'Sending message to Custom Roaming Proxy Failed. custom_roaming_proxy_fqdn: {{\$labels.ocscp_custom_roaming_proxy_fqdn}}, custom_roaming_proxy_nfType: {{\$labels.ocscp_custom_roaming_proxy_nf_type}}, scpfdn: {{\$labels.scp_fqdn}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod_name}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Minor
Condition	This alert is raised when none of the Custom Roaming Proxy NFs in the provided set are reachable. ocscp_worker_custom_roaming_proxy_routing_attempt_fail_current == 1
OID	1.3.6.1.4.1.323.5.3.35.1.2.15041
Metric Used	ocscp_worker_custom_roaming_proxy_routing_attempt_fail_current
Recommended Action	Cause: When none of the Custom Roaming Proxy NFs in the provided set are reachable. Diagnostic Information: • Check failure reasons. • Check if Custom Roaming Proxy is configured in the provided set region. • Check if Custom Roaming Proxy is reachable and available. Recovery: This alarm is cleared automatically when the connection is established with the Custom Roaming Proxy NF and the routing is successful. For any assistance, contact My Oracle Support.

6.3.109 SCPWorkerNFSelectionHeaderMatchListDuplicates

Table 6-113 SCPWorkerNFSelectionHeaderMatchListDuplicates

Field	Details
Description	'Duplicate Header Match list in Nf SelectionMode Rule'
Summary	'Duplicate header match list present for nf selection at config: serviceName = {{\$labels.ocscp_nf_service_type}}, namespace: {{\$labels.namespace}}, podname: {{\$labels.pod}}, scpfdn: {{\$labels.ocscp_fqdn}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Info
Condition	This alert is raised when the selected NF SelectionMode rule identifies more than one matching item in the header match list configuration for a request. increase(ocscp_worker_nf_selection_mode_header_match_conflict_total[10m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.15029
Metric Used	ocscp_worker_nf_selection_mode_header_match_conflict_total

Table 6-113 (Cont.) SCPWorkerNFSelectionHeaderMatchListDuplicates

Field	Details
Recommended Action	Cause: This alert indicates a misconfiguration in NF selection mode where a single rule contains multiple HeaderMatchList entries that can independently match the same service request. This overlapping header match criteria can result in ambiguity when selecting the appropriate NF selection mode. Example: A rule (rule1) contains the following configurations: Entry A: headerMatchList: [{ "headerName": "header1", "headerStatus": "PRESENT" }], selectionMode: CONSUMER_NF_SELECTION Entry B: headerMatchList: [{ "headerName": "header2", "headerStatus": "PRESENT" }], selectionMode: ENHANCED_CONSUMER_NF_SELECTION If an incoming service request contains both header1 and header2, then: - both Entry A and Entry B become valid candidates. - any one of the entries of NF Selection Mode configuration can be applied. - this results in multiple matching indices, triggering the alert. Diagnostic Information: You must review the NF selection mode configuration for the reported rule where each entry can independently match the same request headers. Recovery: This alert is automatically cleared after 10 minutes. For any assistance, contact My Oracle Support.

6.3.110 ScpWorkerServiceRequestRoutingInfoAbsent

Table 6-114 ScpWorkerServiceRequestRoutingInfoAbsent

Field	Details
Description	'Service request is received without any routing information'
Summary	'Service request is received without any routing information for nfType {{ \$labels.ocscp_nf_type }}, nfServiceType {{ \$labels.ocscp_nf_service_type }}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }'
Severity	Info
Condition	This alert is raised when an SBI request is received without routing information. $\text{increase}(\text{ocscp\_worker\_service\_req\_routing\_information\_absent\_total}[10m]) > 0$
OID	1.3.6.1.4.1.323.5.3.35.1.2.3014
Metric Used	ocscp_worker_service_req_routing_information_absent_total
Recommended Action	Cause: SCP received SBI service request without routing information. Diagnostic Information: NA Recovery: This alert is automatically cleared after 10 minutes. For any assistance, contact My Oracle Support.

6.3.111 ScpWorkerNotificationRequestRoutingInfoAbsent

Table 6-115 ScpWorkerNotificationRequestRoutingInfoAbsent

Field	Details
Description	'Notification request is received without any routing information'

Table 6-115 (Cont.) ScpWorkerNotificationRequestRoutingInfoAbsent

Field	Details
Summary	'Notification request is received without any routing information for nfType {{labels.ocscp_nf_type}}, nfServiceType {{labels.ocscp_nf_service_type}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }'
Severity	Info
Condition	This alert is raised when a notification request is received without routing information, regardless of whether any feature is enabled or disabled. increase(ocscp_worker_notification_req_routing_information_absent_total[10m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.3015
Metric Used	ocscp_worker_notification_req_routing_information_absent_total
Recommended Action	Cause: SCP received notification requests without routing information. Diagnostic Information: Not applicable. Recovery: This alert is automatically cleared after 10 minutes. For any assistance, contact My Oracle Support .

6.3.112 SCPWorkerNFProfileSyncFailure

Table 6-116 SCPWorkerNFProfileSyncFailure

Field	Details
Description	'NF Profile processinf failed at worker'
Summary	'NF Profile processinf failed at worker: nftype = {{labels.ocscp_nf_type}},producernfinstanceid = {{labels.ocscp_producer_nf_instance_id}}, namespace: {{labels.namespace}}, podname: {{labels.pod}}, scpfdn: {{labels.ocscp_fqdn}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }'
Severity	Info
Condition	This alert is raised when the SCP-Worker microservice is unable to process the NF profile update received from the SCP-Notification microservice. ocscp_worker_nf_profile_sync_failure_status > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.15039
Metric Used	ocscp_worker_nf_profile_sync_failure_status
Recommended Action	Cause: SCP-Worker is unable to process the NF profile update received from SCP-Notification. Diagnostic Information: NA Recovery: The alert is automatically cleared when a subsequent NF profile update with the same nfInstanceId is processed by the SCP-Worker microservice. For any assistance, contact My Oracle Support .

6.3.113 SCPNfTopologyForceRefreshAuditFailure

Table 6-117 SCPNfTopologyForceRefreshAuditFailure

Field	Details
Description	'SCP Force Refresh Audit failed for nfType {{labels.nfType}}'

Table 6-117 (Cont.) SCPNfTopologyForceRefreshAuditFailure

Field	Details
Summary	'SCP Force Refresh Audit failed for nfType: {{labels.nfType}}, nrfRegionOrSetId: {{labels.nrfRegionOrSetId}}, namespace: {{labels.kubernetes_namespace}}, podname: {{labels.kubernetes_pod_name}}, scpfdn: {{labels.ocscp_fqdn}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Major
Condition	This alert is raised when a force refresh audit attempt in the SCP-Audit microservice fails for a specific nfType and nrfRegionOrSetId. ocscp_audit_nf_topology_force_refresh_audit_failure > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.15045
Metric Used	ocscp_audit_nf_topology_force_refresh_audit_failure
Recommended Action	Cause: When a force refresh audit attempt in the SCP-Audit microservice fails. Diagnostic Information: NA Recovery: Perform the following steps: - The alert is cleared when you re-run the force refresh using the NF Topology On-Demand Audit REST API and it succeeds for the affected nfType and nrfRegionOrSetId. - Changing the Topology Source Info (TSI) to LOCAL for a given nfType clears all alert instances associated with that nfType. - Removing an nfType from SCP using the NFTypes-NFService REST API clears all alert instances associated with that nfType. - Removing an nrfRegionOrSetId clears all the alert instances associated with that nrfRegionOrSetId for the relevant nfType. For any assistance, contact My Oracle Support.

6.3.114 SCPNfGroupIdDiscoveryFailure

Table 6-118 SCPNfGroupIdDiscoveryFailure

Field	Details
Description	'SCP failed to discover SLF (UDR) for GroupId resolution (NF Service Type: {{labels.ocscp_nf_service_type}}, Config: {{labels.config_name}})'
Summary	'SCP NF GroupId discovery failed: nfType = {{labels.ocscp_nf_type}}, nfservicetype = {{labels.ocscp_nf_service_type}}, config = {{labels.config_name}}, namespace: {{labels.namespace}}, podname: {{labels.pod}}, scpfdn: {{labels.ocscp_fqdn}}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}
Severity	Major
Condition	This alert is raised when SCP failed to discover UDR for Group Id resolution. increase(ocscp_worker_nfgroupid_resolution_failure_total{discovery_complete="false"}[2m]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.15046
Metric Used	ocscp_worker_nfgroupid_resolution_failure_total

Table 6-118 (Cont.) SCPNfGroupIdDiscoveryFailure

Field	Details
Recommended Action	Cause: When SCP fails to discover UDR for Group ID resolution, no UDR profile with routing functionality is resolved. Diagnostic Information: • Verify that NF Group ID retrieval configuration and rule mapping are configured as required. • Verify that all mandatory discovery parameters defined in the NF Group ID retrieval configuration are present in the incoming requests. • Verify the connection to SCP-NrfProxy microservice and confirm that discovery requests can reach NRF. • Verify that NRF is healthy and able to return discovery responses for the configured UDR discovery parameters. • If the discovery mode is set to SCP for UDR, verify that the correct static rules are configured for the specified UDR discovery parameters. Recovery: • Resolve the configuration or dependency issue identified in diagnostics, and then retest with a matching request. • This alert is automatically cleared when the SCP observes no new failures for a continuous period of 2 minutes. • Previously failed requests are not retried automatically; only the occurrence of new failures ceases. For any assistance, contact My Oracle Support.

6.3.115 SCPAuditDurationExceeded

Table 6-119 SCPAuditDurationExceeded

Field	Details
Description	'Scheduled audit duration exceeded configured interval for nrfRegionOrSetId: {{\$labels.preregistration}}'
Summary	'Audit duration exceeded. nrfRegionOrSetId: {{\$labels.nrfRegionOrSetId}}, namespace: {{\$labels.kubernetes_namespace}}, podname: {{\$labels.kubernetes_pod_name}}, scpfdn: {{\$labels.ocscp_fqdn}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }'
Severity	Major
Condition	This alert is raised when the scheduled audit duration exceeds the configured interval. <code>ocscp_audit_duration_exceeded == 1</code>
OID	1.3.6.1.4.1.323.5.3.35.1.2.4003
Metric Used	ocscp_audit_duration_exceeded

Table 6-119 (Cont.) SCPAuditDurationExceeded

Field	Details
Recommended Action	Cause: Audit duration exceeded the configured audit interval for a specific NRFSetId. Diagnostic Information: - Verify whether audit for the NRFSetId takes longer than the configured audit interval. - Determine whether the increased audit duration is expected. - If the increase is unexpected, verify that NRF responses arrive within the expected time. - If the increase is expected, increase the configured audit interval value. Recovery: - The alert clears in the next audit interval when audit duration takes less time than the configured audit interval. For any assistance, contact My Oracle Support.

6.3.116 SCPSelfProfileUpdateSuccess

Table 6-120 SCPSelfProfileUpdateSuccess

Field	Details
Description	'Self SCP profile runtime update completed successfully'
Summary	'Self SCP profile runtime update completed successfully namespace: {{ \$labels.kubernetes_namespace }}, podname: {{ \$labels.kubernetes_pod_name }}, scpfdn: {{ \$labels.ocscp_fqdn }}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }'
Severity	Info
Condition	This alert is raised when the self SCP profile runtime update is completed. increase(ocscp_self_profile_update_success_total[24h]) > 0
OID	1.3.6.1.4.1.323.5.3.35.1.2.15047
Metric Used	ocscp_self_profile_update_success_total
Recommended Action	Cause: When the self SCP profile runtime update is completed successfully. This alert is raised when the following parameters in the self SCP profile are updated: priority, capacity, load, plmnList, locality, servingScope, mateScplInfoList, or mateSiteInfo. Diagnostic Information: Verify the namespace, pod name, and SCP FQDN in the summary to confirm the expected instance update. Recovery: No action is required as this is an informational alert. This alert clears automatically if no successful self-profile update is observed in the last 24 hours. For any assistance, contact My Oracle Support.

6.3.117 SCPEgressRateLimitActiveKeyCountAboveCriticalThreshold

Table 6-121 SCPEgressRateLimitActiveKeyCountAboveCriticalThreshold

Field	Details
Description	'Egress Rate Limit active key count excluding Global Egress Rate Limit keys is above 100 Percent of supported limit (3500)'

Table 6-121 (Cont.) SCPEgressRateLimitActiveKeyCountAboveCriticalThreshold

Field	Details
Summary	'Egress Rate Limit active key count excluding Global Egress Rate Limit keys is {{ \$value printf "%.0f" }}, above 100 Percent of supported limit (3500). namespace: {{ \$labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when Egress Rate Limit active key count, excluding Global egress Rate Limit keys, exceeds 100% of the supported limit. (sum(coherence_cache_size{name="egressRateLimitMap"}) by (kubernetes_namespace) - sum(coherence_cache_size{name="localRLConfigDataCache"}) by (kubernetes_namespace)) > 3500
OID	1.3.6.1.4.1.323.5.3.35.1.2.7036
Metric Used	coherence_cache_size
Recommended Action	Cause: Egress rate limit active key count, excluding Global Egress Rate Limit keys, increased above the supported limit, 3500. Diagnostic Information: - Wait 30 minutes for inactive key deletion. If the alert remains active, perform the following steps: - Check the coherence_cache_size metric for cache name egressRateLimitMap, and subtract coherence_cache_size for cache name localRLConfigDataCache to identify the number of active egress rate limit bucket keys. - Check ocsdp_metric_message_current_request_rate_total grouped by bucketKey to identify bucket keys receiving ongoing traffic. - If the active bucket key count is high, review the egress rate limiter configuration and traffic patterns to identify configurations generating excessive bucket keys. Recovery: - Reduce egress rate limiter key configuration entries, or disable rate limiting for keys that do not require it. - The alert clears automatically when the active key count goes below the critical threshold. For any assistance, contact My Oracle Support.

6.3.118 SCPEgressRateLimitActiveKeyCountAboveMajorThreshold

Table 6-122 SCPEgressRateLimitActiveKeyCountAboveMajorThreshold

Field	Details
Description	'Egress Rate Limit active key count excluding Global Egress Rate Limit keys is above 90 Percent of supported limit (3500)'
Summary	'Egress Rate Limit active key count excluding Global Egress Rate Limit keys is {{ \$value printf "%.0f" }}, above 90 Percent of supported limit (3500). namespace: {{ \$labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major

Table 6-122 (Cont.) SCPEgressRateLimitActiveKeyCountAboveMajorThreshold

Field	Details
Condition	This alert is raised when the Egress Rate Limit active key count, excluding Global Egress Rate Limit keys, exceeds 90% of the supported limit. <pre>(sum(coherence_cache_size{name="egressRateLimitMap"}) by (kubernetes_namespace) - sum(coherence_cache_size{name="localRLConfigDataCache"}) by (kubernetes_namespace)) > 3150 <= 3500</pre>
OID	1.3.6.1.4.1.323.5.3.35.1.2.7036
Metric Used	coherence_cache_size
Recommended Action	Cause: Egress rate limit active key count, excluding Global Egress Rate Limit keys, increased above 90% of the supported limit, 3500. Diagnostic Information: - Wait 30 minutes for inactive key deletion to complete. If the alert remains active, perform the following steps: - Check the coherence_cache_size metric for cache name egressRateLimitMap, and subtract coherence_cache_size for cache name localRLConfigDataCache to identify the number of active egress rate limit bucket keys. - Check ocsdp_metric_message_current_request_rate_total grouped by bucketKey to identify bucket keys receiving ongoing traffic. - If the active bucket key count is high, review the egress rate limiter configuration and traffic patterns to identify configurations generating excessive bucket keys. Recovery: - Reduce egress rate limiter key configuration entries, or disable rate limiting for keys that do not require it. - The alert clears automatically when the active key count goes below the major threshold. For any assistance, contact My Oracle Support.

6.3.119

SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold

Table 6-123 SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold

Field	Details
Description	'Combined Egress and Global Egress Rate Limit active key count is above 100 Percent of supported limit (3500)'
Summary	'Combined Egress and Global Egress Rate Limit active key count is {{ \$value printf "%.0f" }}, above 100 Percent of supported limit (3500). namespace: {{ \$labels.kubernetes_namespace }}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }{'
Severity	Critical

Table 6-123 (Cont.) SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold

Field	Details
Condition	This alert is raised when combined Egress and Global Egress Rate Limit active key count exceeds 100% of the supported limit. <pre>sum(coherence_cache_size{name="egressRateLimitMap"}) by (kubernetes_namespace) > 3500</pre>
OID	1.3.6.1.4.1.323.5.3.35.1.2.7038
Metric Used	coherence_cache_size
Recommended Action	Cause: Combined Egress and Global Egress Rate Limit active key count increased above the supported limit, 3500. Diagnostic Information: - Wait 30 minutes for inactive key deletion. If the alert remains active, perform the following steps: - Check the coherence_cache_size metric for cache name egressRateLimitMap to identify the combined number of active Egress and Global Egress Rate Limit bucket keys that SCP uses. - Check ocsdp_metric_message_current_request_rate_total grouped by bucketKey to identify bucket keys receiving ongoing traffic. - If the combined active bucket key count is high, review Egress and Global Egress Rate Limit configuration and traffic patterns to identify configurations generating excessive bucket keys. Recovery: - Reduce egress and global egress rate limiter key configuration entries, or disable rate limiting for keys that do not require it. - The alert clears automatically when the active key count goes below the critical threshold. For any assistance, contact My Oracle Support.

6.3.120

SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold

Table 6-124 SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold

Field	Details
Description	'Combined Egress and Global Egress Rate Limit active key count is above 90 Percent of supported limit (3500)'
Summary	'Combined Egress and Global Egress Rate Limit active key count is {{ \$value printf "%.0f" }}, above 90 Percent of supported limit (3500). namespace: {{ \$labels.kubernetes_namespace }}, timestamp: {{ with query "time()" }}{{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major

Table 6-124 (Cont.) SCPEgressAndGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold

Field	Details
Condition	This alert is raised when combined Egress and Global Egress Rate Limit active key count exceeds 90% of the supported limit. <pre>sum(coherence_cache_size{name="egressRateLimitMap"}) by (kubernetes_namespace) > 3150 <= 3500</pre>
OID	1.3.6.1.4.1.323.5.3.35.1.2.7038
Metric Used	coherence_cache_size
Recommended Action	Cause: Combined Egress and Global Egress Rate Limit active key count increased above 90 percent of the supported limit, 3500. Diagnostic Information: - Wait 30 minutes for inactive key deletion. If the alert remains active, perform the following steps: - Check the coherence_cache_size metric for cache name egressRateLimitMap to identify the combined number of active Egress and Global Egress Rate Limit bucket keys SCP uses. - Check ocsdp_metric_message_current_request_rate_total grouped by bucketKey to identify bucket keys receiving ongoing traffic. - If the combined active bucket key count is high, review the Egress and Global Egress Rate Limit configuration and traffic patterns to identify configurations generating excessive bucket keys. Recovery: - Reduce egress and global egress rate limiter key configuration entries, or disable rate limiting for keys that do not require it. - The alert clears automatically when the active key count goes below the major threshold. For any assistance, contact My Oracle Support.

6.3.121 SCPIngressRateLimitActiveKeyCountAboveMajorThreshold

Table 6-125 SCPIngressRateLimitActiveKeyCountAboveMajorThreshold

Field	Details
Description	'Ingress Rate Limit active key count for cache {{\$labels.name}} is above 90 Percent of supported limit (900)'
Summary	'Ingress Rate Limit active key count for cache {{\$labels.name}} is {{ \$value printf "%.0f" }}, above 90 Percent of supported limit (900). namespace: {{\$labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alert is raised when the Ingress Rate Limit active key count exceeds 90% of the supported limit. <pre>sum(coherence_cache_size{name="ingressRateLimitMap"}) by (kubernetes_namespace,name) > 810 <= 900</pre>
OID	1.3.6.1.4.1.323.5.3.35.1.2.7035

Table 6-125 (Cont.) SCPIngressRateLimitActiveKeyCountAboveMajorThreshold

Field	Details
Metric Used	coherence_cache_size
Recommended Action	Cause: Ingress rate limit active key count has increased above 90% of the supported limit, 900. Diagnostic Information: - Wait 30 minutes for inactive key deletion to complete. If the alert remains active, perform the following steps: - Check the coherence_cache_size metric for cache name ingressRateLimitMap to identify the number of active ingress rate limit bucket keys SCP uses. - Check ocsdp_metric_message_current_request_rate_total grouped by bucketKey to identify bucket keys receiving ongoing traffic. - If the active bucket key count is high, review the ingress rate limiter configuration and traffic patterns to identify configurations that generate excessive bucket keys. Recovery: - Reduce ingress rate limiter key configuration entries, or disable rate limiting for keys that do not require it. - The alert clears automatically when the active key count falls below the major threshold. For any assistance, contact My Oracle Support.

6.3.122 SCPIngressRateLimitActiveKeyCountAboveCriticalThreshold

Table 6-126 SCPIngressRateLimitActiveKeyCountAboveCriticalThreshold

Field	Details
Description	'Ingress Rate Limit active key count for cache {{\$labels.name}} is above 100 Percent of supported limit (900)'
Summary	'Ingress Rate Limit active key count for cache {{\$labels.name}} is {{ \$value printf "%.0f" }}, above 100 Percent of supported limit (900). namespace: {{\$labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when the Ingress Rate Limit active key count exceeds 100% of the supported limit. sum(coherence_cache_size{name="ingressRateLimitMap"}) by (kubernetes_namespace, name) > 900
OID	1.3.6.1.4.1.323.5.3.35.1.2.7035
Metric Used	coherence_cache_size

Table 6-126 (Cont.) SCPIngressRateLimitActiveKeyCountAboveCriticalThreshold

Field	Details
Recommended Action	Cause: Ingress rate limit active key count increased above the supported limit, 900. Diagnostic Information: - Wait 30 minutes for inactive key deletion. If the alert remains active, perform the following steps: - Check the coherence_cache_size metric for cache name ingressRateLimitMap to identify the number of active ingress rate limit bucket keys SCP uses. - Check ocscp_metric_message_current_request_rate_total grouped by bucketKey to identify bucket keys receiving ongoing traffic. - If the active bucket key count is high, review the ingress rate limiter configuration and traffic patterns to identify configurations generating excessive bucket keys. Recovery: - Reduce ingress rate limiter key configuration entries, or disable rate limiting for keys that do not require it. - The alert clears automatically when the active key count goes below the critical threshold. For any assistance, contact My Oracle Support.

6.3.123 SCPGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold

Table 6-127 SCPGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold

Field	Details
Description	'Global Egress Rate Limit active key count for cache {{\$labels.name}} is above 100 Percent of supported limit (2400)'
Summary	'Global Egress Rate Limit active key count for cache {{\$labels.name}} is {{ \$value printf "%.0f" }}, above 100 Percent of supported limit (2400). namespace: {{\$labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Critical
Condition	This alert is raised when the Global Egress Rate Limit active key count exceeds 100% of the supported limit. sum(coherence_cache_size{name="localRLConfigDataCache"}) by (kubernetes_namespace, name) > 2400
OID	1.3.6.1.4.1.323.5.3.35.1.2.7037
Metric Used	coherence_cache_size

Table 6-127 (Cont.) SCPGlobalEgressRateLimitActiveKeyCountAboveCriticalThreshold

Field	Details
Recommended Action	Cause: Global Egress Rate Limit active key count increased above the supported limit, 2400. Diagnostic Information: - Wait 30 minutes for inactive key deletion. If the alert remains active, perform the following steps: - Check the coherence_cache_size metric for cache name localRLConfigDataCache to identify the number of active Global Egress Rate Limit bucket keys SCP uses. - Check ocscp_metric_message_current_request_rate_total grouped by bucketKey to identify Global Egress Rate Limit bucket keys receiving ongoing traffic. - If the active bucket key count is high, review the Global Egress Rate Limit configuration and traffic patterns to identify configurations generating excessive bucket keys. Recovery: - Reduce global egress rate limiter key configuration entries, or disable rate limiting for keys that do not require it. - The alert clears automatically when the active key count goes below the critical threshold. For any assistance, contact My Oracle Support.

6.3.124 SCPGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold

Table 6-128 SCPGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold

Field	Details
Description	'Global Egress Rate Limit active key count for cache {{\$labels.name}} is above 90 Percent of supported limit (2400)'
Summary	'Global Egress Rate Limit active key count for cache {{\$labels.name}} is {{ \$value printf "%.0f" }}, above 90 Percent of supported limit (2400). namespace: {{\$labels.kubernetes_namespace}}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{{ end }}'
Severity	Major
Condition	This alerts is raised when the Global Egress Rate Limit active key count exceeds 90% of the supported limit. sum(coherence_cache_size{name="localRLConfigDataCache"}) by (kubernetes_namespace, name) > 2160 <= 2400
OID	1.3.6.1.4.1.323.5.3.35.1.2.7037
Metric Used	coherence_cache_size

Table 6-128 (Cont.) SCPGlobalEgressRateLimitActiveKeyCountAboveMajorThreshold

Field	Details
Recommended Action	Cause: Global Egress Rate Limit active key count increased above 90% of the supported limit, 2400. Diagnostic Information: - Wait 30 minutes for inactive keys to be deleted. If the alert remains active, perform the following steps: - Check the coherence_cache_size metric for cache name localRLConfigDataCache to identify the number of active Global Egress Rate Limit bucket keys used by SCP. - Check ocscp_metric_message_current_request_rate_total grouped by bucketKey to identify Global Egress Rate Limit bucket keys receiving ongoing traffic. - If the active bucket key count is high, review Global Egress Rate Limit configuration and traffic patterns to identify configurations generating excessive bucket keys. Recovery: - Reduce global egress rate limiter key configuration entries, or disable rate limiting for keys that do not require it. - The alert clears automatically when the active key count goes below the major threshold. For any assistance, contact My Oracle Support.

6.4 Mediation Alerts

This section provides detailed information on all mediation alerts, including their descriptions, severity, and recommended actions.

6.4.1 NFMediationUserDefinedVariablesMaxSizeLimitExceeded

Table 6-129 NFMediationUserDefinedVariablesMaxSizeLimitExceeded

Field	Details
Description	This alert is raised when the total size of all user-defined variables and their values exceeds the configured size.
Summary	namespace: {{ \$labels.namespace }}, podname: {{ \$labels.pod }}, timestamp: {{ with query "time()" }}{ . first value humanizeTimestamp }}{ end }}: Currently user defined variables maximum size limit exceeded the configured limit {{ \$value printf "%.2f" }} times
Severity	minor
Condition	increase(ocscp_med_udvs_max_size_limit_exceeded_total[5m]) > 0
OID	1.3.6.1.4.1.323.5.3.47.1.2.1005
Metric Used	ocscp_med_udvs_max_size_limit_exceeded_total

Table 6-129 (Cont.) NFMediationUserDefinedVariablesMaxSizeLimitExceeded

Field	Details
Recommended Action	Cause: This alert is raised when the total size of all user-defined variables and their values exceeds the configured limit. Diagnostic Information: The size of the user-defined variables list (med-user-defined-var-list) during mediation may have exceeded the configured limit. Recovery: Reduce the size or number of user-defined variables to bring the size within the limit. For any assistance, contact My Oracle Support.

7

KPIs and Traces

This chapter provides information about newly introduced and updated Key Performance Indicators (KPIs) and Traces.

7.1 Key Performance Indicators

This section provides information about Key Performance Indicators (KPIs) for Service Communication Proxy (SCP).

In the Grafana SCP dashboard, you can select a namespace from the dropdown menu.

If the dropdown menu does not populate with options, perform the following steps:

1. Navigate to **Settings** and then to **Variables** and **Data Source**.
2. Ensure the correct Data Source is selected.
3. Verify that namespaces are being populated correctly by running the query.

7.1.1 Platform KPIs

The following table provides information on Platform metrics.

Table 7-1 SCP CPU Usage

Field	Details
Description	The total SCP CPU utilization per pod.
Expression	<code>sum(rate(container_cpu_usage_seconds_total{image!="",namespace="ocscp"}[2m])) by (pod,container)</code>

Table 7-2 SCP Memory Usage

Field	Details
Description	The total SCP memory utilization per pod.
Expression	<code>(avg_over_time(container_memory_working_set_bytes{namespace="ocscp",container=~"istio-proxy scp.*"}[2m]))</code>

Table 7-3 SCP Memory Usage Percentage

Field	Details
Description	The total percentage of SCP memory utilization per pod.
Expression	<code>round(100 * avg_over_time(container_memory_working_set_bytes{image!="",container_name!="POD",namespace="ocscp", container=~"scp-nrfproxy"}[2m]) / (8*1073741824))</code> Note: Here, scp-nrfproxy is taken as an example; the same holds true for all the other microservices. The hardcoded memory value of 8GB (for nrfproxy) must be replaced in the Grafana dashboard file with the value that is assigned in the deployment environment, and this holds true for all the other microservices.

Table 7-4 SCP CPU Usage Percentage

Field	Details
Description	The total percentage of SCP CPU utilization per pod.
Expression	<code>sum(rate(container_cpu_usage_seconds_total{image!="",namespace="ocscp",container="scpc-audit"}[2m])) by (pod,container)*100/3</code> Note: Here, scp-worker is taken as an example; the same holds true for all the other microservices. The hardcoded CPU value of 8 (for scp-worker) must be replaced in the Grafana dashboard file with the value that is assigned in the deployment environment, and this holds true for all the other microservices.

Table 7-5 CPU Usage

Field	Details
Description	The total percentage of SCP CPU utilization by primary and worker pod.
Expression	<code>sum (rate (container_cpu_usage_seconds_total{image!="",node=~"k8s.*",namespace="ocscp"}[2m])) by (node)</code>

Table 7-6 Memory Usage

Field	Details
Description	The total percentage of SCP memory utilization by primary and worker pod.
Expression	<code>sum (container_memory_working_set_bytes{id="/",node=~"k8s.*",namespace="ocscp"}) by (node)</code>

Table 7-7 Prometheus CPU Utilization

Field	Details
Description	CPU utilization of Prometheus pods.
Expression	<code>sum(rate(container_cpu_usage_seconds_total{pod="ocne-prometheus-server-5f48d747b8-lx4zn",container="prometheus-server",namespace="ocscp"} [5m]))</code>

Table 7-8 Prometheus Memory Utilization

Field	Details
Description	Memory Utilization of Prometheus Pods.
Expression	<code>container_memory_usage_bytes{container="prometheus-server",namespace="ocscp"}</code>

Table 7-9 Samples_scraped_time

Field	Details
Description	Total number of Metrics samples scraped by Prometheus in give time.
Expression	<code>avg_over_time(scrape_samples_scraped{namespace="ocscp"}[10m])</code>

7.1.2 Application KPIs

The following table provides information on Application KPIs.

Table 7-10 Ingress Request Rate

Field	Details
Description	Total number of ingress requests sent to SCP by consumer NFs.
Expression	sum(irate(ocscp_metric_http_rx_req_total{namespace="ocscp", ocscp_consumer_host!="OCSCP-INITIATED-MSG"}[5m])) by (ocscp_nf_type,ocscp_service_instance_id)

Table 7-11 Egress Request Rate

Field	Details
Description	Total number of egress requests sent to producer NFs by SCP.
Expression	sum(irate(ocscp_metric_http_tx_req_total{namespace="ocscp"}[2m])) by (ocscp_nf_type)

Table 7-12 Ingress Response Rate

Field	Details
Description	Total number of ingress responses sent to SCP by producer NFs.
Expression	sum(irate(ocscp_metric_http_rx_res_total{namespace="ocscp"}[2m])) by (ocscp_response_code_class, ocscp_producer_host)

Table 7-13 Egress Response Rate

Field	Details
Description	Total number of egress responses sent to consumer NFs by SCP.
Expression	sum(irate(ocscp_metric_http_tx_res_total{namespace="ocscp", ocscp_consumer_host!="OCSCP-INITIATED-MSG"}[2m]))

Table 7-14 Response Processing Time

Field	Details
Description	The rate of processing time by SCP for ingress responses into the time buckets.
Expression	sum(irate(ocscp_metric_response_processing_time_total{namespace="ocscp"}[2m]))by(ocscp_processing_time)

Table 7-15 Request Processing Time

Field	Details
Description	The rate of processing time by SCP for ingress requests into the time buckets.
Expression	sum(irate(ocscp_metric_request_processing_time_total{namespace="ocscp"}[2m]))by(ocscp_processing_time)

Table 7-16 Transaction Success Rate

Field	Details
Description	The rate of successful transaction response sent by SCP for a request.
Expression	$\frac{((\text{sum}(\text{irate}(\text{ocscp\_metric\_http\_tx\_res\_total}\{\text{ocscp\_response\_code\_class}=\text{"2"}, \text{kubernetes\_namespace}=\sim\text{"$namespace"}\}\{2\text{m}\})))}{(\text{sum}(\text{irate}(\text{ocscp_metric_http_tx_res_total}\{\text{kubernetes_namespace}=\sim\text{"$namespace"}\}\{2\text{m}\})))} \times 100$

Table 7-17 Response Code Rate

Field	Details
Description	The rate of different response codes class on SCP.
Expression	$\text{sum}(\text{irate}(\text{ocscp\_metric\_http\_rx\_res\_total}\{\text{kubernetes\_namespace}=\text{"$namespace"}\}\{2\text{m}\})) \text{ by } (\text{ocscp_response_code_class})$

Table 7-18 scp-worker replicas

Field	Details
Description	The total number of ready replicas for the scp-worker service.
Expression	$\text{kube\_replicaset\_status\_ready\_replicas}\{\text{replicaset}=\sim\text{"$.*scp-worker.*"}, \text{namespace}=\text{"$namespace"}\}$

Table 7-19 NF Notifications Success

Field	Details
Description	The total number of notifications successfully processed by SCP.
Expression	$\text{sum}(\text{ocscp\_notification\_nf\_profile\_processing\_success\_total})$

Table 7-20 NF Notifications Failures

Field	Details
Description	The total number of notifications failed to be processed by SCP.
Expression	$\text{sum}(\text{ocscp\_notification\_nf\_profile\_processing\_failure\_total})$

Table 7-21 Audit Requests Total

Field	Details
Description	The total number of audit requests sent by SCP.
Expression	$\text{sum}(\text{ocscp\_audit\_tx\_req\_total}\{\text{namespace}=\text{"ocscp"}\})$

Table 7-22 Audit Responses Total

Field	Details
Description	The total number of audit responses received by SCP.
Expression	$\text{sum}(\text{ocscp\_audit\_rx\_res\_total}\{\text{namespace}=\text{"ocscp"}\})$

Table 7-23 NF Subscription Success

Field	Details
Description	The total number of successful subscriptions on SCP per NF type.
Expression	sum(ocscp_subscription_nf_success_total)

Table 7-24 NF Subscription Failures

Field	Details
Description	The total number of failed subscriptions on SCP per NF type.
Expression	sum(ocscp_subscription_nf_failure_total)

Table 7-25 NRF Registration Success

Field	Details
Description	The total number of successful NRF registrations on SCP.
Expression	sum(ocscp_subscription_nrf_registration_success_total)

Table 7-26 NRF Registration Failure

Field	Details
Description	The total number of failed NRF registrations on SCP.
Expression	sum(ocscp_subscription_nrf_registration_failure_total)

Table 7-27 NRF Heartbeat Success

Field	Details
Description	The total number of successful NRF Heartbeats on SCP.
Expression	sum(ocscp_subscription_nrf_heartbeat_success_total{namespace="ocscp"})

Table 7-28 NRF Heartbeat Failures

Field	Details
Description	The total number of failed NRF Heartbeats on SCP.
Expression	sum(ocscp_subscription_nrf_heartbeat_failures_total{namespace="ocscp"})

7.1.3 Feature KPIs

The following table provides information on Feature KPIs.

Table 7-29 Access Token Count in Response

Field	Details
Description	The rate of responses contains the 3gpp-Sbi-Access-Token header.

Table 7-29 (Cont.) Access Token Count in Response

Field	Details
Expression	sum(irate(ocscp_worker_access_token_forwarded_in_tx_res_total{namespace="ocscp"}[2m]))

Table 7-30 Received Response count for nnrf-oauth2 service

Field	Details
Description	Rate of nnrf-oaut2 service responses from NRF.
Expression	sum(irate(ocscp_metric_http_rx_res_total{namespace="ocscp",ocscp_nf_service_type="nnrf-oauth2",ocscp_response_code="200"}[2m]))by(pod)

Table 7-31 Coherence Cache Size for AccessToken

Field	Details
Description	Number of access tokens in the cache.
Expression	coherence_cache_size{namespace="ocscp",name="accessTokenMap"}

Table 7-32 Access Token Count in Transmitted Request

Field	Details
Description	Rate of SCP sending the 3gpp-Sbi-Access-Token header in the request.
Expression	sum(irate(ocscp_worker_access_token_forwarded_in_tx_req_total{namespace="ocscp"}[2m]))

Table 7-33 SCP Worker - Discovery Tx Requests Rate to NRF Proxy

Field	Details
Description	Rate of worker sends an on-demand discovery request to nrfproxy.
Expression	sum(irate(ocscp_metric_ondemand_discovery_tx_req_total{namespace="ocscp"}[2m]))

Table 7-34 SCP Worker - Discovery Rx Response Rate from NRF Proxy

Field	Details
Description	Rate of worker receives on-demand discovery response from nrfproxy.
Expression	sum(irate(ocscp_metric_ondemand_discovery_rx_res_total{namespace="ocscp"}[2m]))

Table 7-35 NRF Proxy - Discovery Tx Requests Rate to NRF

Field	Details
Description	Rate of discovery requests sent to the NRF by nrfproxy.
Expression	sum(irate(ocscp_nrf_nf_discovery_tx_req_total{namespace="ocscp"}[2m]))by(pod)

Table 7-36 NRF Proxy - Discovery Rx Response Rate from NRF

Field	Details
Description	Rate of discovery responses received on nrfproxy from NRF.
Expression	sum(irate(ocscp_nrf_nf_discovery_rx_res_total{namespace="ocscp"}[2m]))by(pod)

Table 7-37 SCP-Worker - Local Discovery Requests Resolution Rate(Cache Hits)

Field	Details
Description	Rate of worker was able to resolve discovery request using local cache.
Expression	sum(irate(ocscp_metric_ondemand_discovery_cache_match_total{namespace="ocscp"}[2m]))by(pod)

Table 7-38 NRF Proxy Generated Error response Rate

Field	Details
Description	Rate of error responses generated by nrfproxy (excluding nrf-returned errors).
Expression	sum(irate(ocscp_nrfproxy_generated_error_response_total{namespace="ocscp"}[2m]))by(pod)

Table 7-39 SCP LCI Tx Rate

Field	Details
Description	Rate of messages forwarded with SCP's LCI header.
Expression	sum(irate(ocscp_metric_scp_lci_tx_total{namespace=~"ocscp"}[2m]))

Table 7-40 Per NF Load

Field	Details
Description	The current load of peer NF.
Expression	ocscp_nf_load{namespace=~"ocscp"}

Table 7-41 Peer LCI Rx Rate

Field	Details
Description	Rate of messages received with NF's LCI header.
Expression	sum(irate(ocscp_metric_nf_lci_rx_total{namespace=~"ocscp"}[2m]))

Table 7-42 Peer LCI Tx Rate

Field	Details
Description	Rate of messages forwarded with NF's LCI header.
Expression	sum(irate(ocscp_metric_nf_lci_tx_total{namespace=~"ocscp"}[2m]))

Table 7-43 Ingress Rate Limit - Request Throttle Rate

Field	Details
Description	Number of requests throttled due to ingress rate limitations.
Expression	sum(irate(ocscp_metric_ingress_rate_limiting_throttle_req_total{namespace="ocscp"}[2m]))by(ocscp_consumer_fqdn, ocscp_configured_ingress_rate, ocscp_ingress_rl_bucketkey)

Table 7-44 Ingress Rate Limit - Rate Limit Not Applied Rate

Field	Details
Description	Number of requests routed without ingress rate limiting treatment.
Expression	sum(irate(ocscp_metric_ingress_rate_limiting_not_applied_req_total{namespace="ocscp"}[2m]))by(ocscp_consumer_fqdn, ocscp_cause)

Table 7-45 Egress Rate Limit - Request Throttle Rate

Field	Details
Description	Number of requests throttled due to egress rate limiting.
Expression	sum(irate(ocscp_metric_egress_rate_limiting_throttle_req_total{namespace="ocscp"}[2m]))by(ocscp_nf_type, ocscp_producer_host, ocscp_nf_service_type, ocscp_configured_egress_rate, ocscp_egress_rl_bucketkey, ocscp_nf_instance_id)

Table 7-46 Egress Rate Limit - Rate Limit Not Applied Rate

Field	Details
Description	Number of requests routed without egress rate limiting treatment.
Expression	sum(irate(ocscp_metric_egress_rate_limiting_not_applied_req_total{namespace="ocscp"}[2m]))by(ocscp_nf_type, ocscp_producer_host, ocscp_cause)

Table 7-47 SCP Cache Size

Field	Details
Description	Coherence cache size for different caches.
Expression	coherence_cache_size

Table 7-48 SCP Cache Hits

Field	Details
Description	Number of coherence cache hits.
Expression	sum(irate(coherence_cache_hits{namespace="ocscp"}[2m])) by (name)

Table 7-49 Message Request Rate Per Rate Limit Bucket Key

Field	Details
Description	Rate of request received per rate limit key.

Table 7-49 (Cont.) Message Request Rate Per Rate Limit Bucket Key

Field	Details
Expression	sum(irate(ocscp_metric_message_current_request_rate_total{namespace="ocscp"}[2m]))by (bucketKey)

Table 7-50 SCP OCI Conveyance Rate

Field	Details
Description	Number of messages with SCP's OCI conveyed to peers.
Expression	sum(irate(ocscp_worker_oci_conveyance_total{namespace=~"ocscp"}[2m]))

Table 7-51 Peer OCI Conveyance Rate

Field	Details
Description	Number of messages with a peer's OCI conveyed to peers.
Expression	sum(irate(ocscp_worker_peer_oci_conveyance_total{namespace=~"ocscp"}[2m]))

Table 7-52 OCI Enforced Rate

Field	Details
Description	Number of messages on which OCI is enforced that are either rerouted to alternate NFs or an error response is sent.
Expression	sum(irate(ocscp_worker_oci_enforced_total{namespace=~"ocscp"}[2m]))

Table 7-53 OCI Unsupported Rx Rate

Field	Details
Description	Number of messages received with unsupported scope.
Expression	sum(irate(ocscp_worker_rx_unsupported_oci_scope_total{namespace=~"ocscp"}[2m]))

Table 7-54 SCP Worker - Mediation Tx Requests Rate

Field	Details
Description	The total number of messages that forwarded to the mediation service from SCP.
Expression	sum(irate(ocscp_mediation_http_tx_total{namespace="ocscp"}[2m])) by (pod)

Table 7-55 SCP Worker -Mediation Rx Response Rate

Field	Details
Description	The total number of messages that the mediation service sends back as a response to SCP.
Expression	sum(irate(ocscp_mediation_http_rx_total{namespace="ocscp"}[2m])) by (pod)

Table 7-56 SCP Worker - Mediation Upstream Service Time

Field	Details
Description	This indicates the total time taken by the mediation to process the request.
Expression	sum(irate(ocscp_mediation_upstream_service_time_ms_total{namespace="ocscp"}[2m])) by (ocscp_med_upstream_service_time)

7.2 Traces

The following table provides information of traces for SCP.

Table 7-57 SCP Traces

Field Name	Description
component	The software package, framework, library, or module that generated the associated Span. Request or Response Type : common
node_id	Local information. Request or Response Type : common
method	HTTP method of the request for the associated Span. Example: "GET", "POST". Request or Response Type : request,common
scheme	Url scheme is http. Request or Response Type : request
authority	Authority give you details about registered name or server address, along with optional port and user information. Request or Response Type : request
path	A path consists of a sequence of path segments separated by a slash ("/") character. Request or Response Type : request
3gpp-sbi-message-priority	This header shall be included in HTTP/2 messages when a priority for the message needs to be conveyed. Request or Response Type : request
x-forwarded-for	To identify the originating IP address of a client. Request or Response Type : request
x-forwarded-proto	To determine the protocol used between the client and SCP. Request or Response Type : request
x-envoy-internal	service wants to know whether a request is internal origin or not. Request or Response Type : request

Table 7-57 (Cont.) SCP Traces

Field Name	Description
via	It is used for tracking message forwards, avoiding request loops, and identifying the protocol capabilities of senders along the request/response chain. Request or Response Type : request
x-request-id	The x-request-idheader is used to uniquely identify a request as well as perform stable access logging and tracing. Request or Response Type : common
payload	http request body. Request or Response Type : request, common
status	To determine the http request has been succeeded or not. Request or Response Type : response
content-type	The Content-Type entity header is used to indicate the media type of the resource. Request or Response Type : response
content-length	The Content-Length header indicates the size of the entity body in the message, in bytes. Request or Response Type : response
server	The Server response-header field contains information about the software used by the origin server to handle the request. Request or Response Type : response
date	The time and date, when the request is processed. Request or Response Type : response
x-envoy-upstream-service-time	Contains the time in milliseconds spent by the upstream host processing the request. Request or Response Type : response
location	To provide information about the location of a newly created resource. Request or Response Type : response
payload	http response body. Request or Response Type : response
http.url	Specifies the request's URL. Request or Response Type : request, common
downstream_cluster	A downstream host connects to Envoy, sends requests, and receives responses. Request or Response Type : common

Table 7-57 (Cont.) SCP Traces

Field Name	Description
user_agent	When your browser connects to a website, it includes a User-Agent field in its HTTP header. Request or Response Type : request, common
http.protocol	The communication between client and server over HTTP/2. Request or Response Type : common
request_size	HTTP header size. Request or Response Type : common
upstream_cluster	An upstream host receives connections and requests from Envoy and returns responses. Request or Response Type : common
http.status_code	HTTP response status code for the associated Span. Example: 200, 503, 404 Request or Response Type : common
response_size	HTTP header size. Request or Response Type : common
response_flag	Additional details about the response or connection, if any. Request or Response Type : common
span.kind	Specifies the role of the span in a RPC communication. In case of HTTP communication it is searching client and server values for this tag. Request or Response Type : common
error	True, if and only if, the application considers the operation represented by the Span to have failed. Request or Response Type : common
x-request-id	The x-request-id header is used by Envoy to uniquely identify a request as well as perform stable access logging and tracing Request or Response Type : request
x-b3-traceid	The x-b3-traceid HTTP header is used by the Zipkin tracer in Envoy. The TraceId is 64-bit in length and indicates the overall ID of the trace. Every span in a trace shares this ID. Request or Response Type : request
x-b3-spanid	The x-b3-spanid HTTP header is used by the Zipkin tracer in Envoy. The SpanId is 64-bit in length and indicates the position of the current operation in the trace tree. Request or Response Type : request

Table 7-57 (Cont.) SCP Traces

Field Name	Description
x-b3-sampled	The x-b3-sampledHTTP header is used by the Zipkin tracer in Envoy. When the sampled flag is either not specified or set to 1, the span will be reported to the tracing system. Request or Response Type : request
ueidentitytype	NF type. Request or Response Type : request
ueidentityvalue	SUPI range for NF type. Request or Response Type : request
x-envoy-expected-rq-timeout-ms	This is the time in milliseconds the router expects the request to be completed. Request or Response Type : request

8

SCP Interactions with NRF

SCP allows configuration of multiple NRF sets and determines the network topology with all the configured NRF sets.

SCP can register with an NRF instance as per priority and capacity in each configured NRF set. You can configure an SCP profile at the time of deployment. SCP sends NF details for heartbeat with NRF and updates the mate SCP information in the NF profile after the deployment.

SCP subscribes to any NF status change notification for all the 5G NF types with one of the available NRF instances as per priority and capacity in each configured NRF set using NFStatusSubscribe, NFStatusUnsubscribe, and NFStatusNotify service operations of the Nnrf_NFManagement service. NF suspended and deregistered notification removes the detected NF information and updates the routing information as required.


SCP performs periodic 5G NF topology audits with one of the available NRF instances as per priority and capacity in each configured NRF set using the NFListRetrieval and NFProfileRetrieval service operations of the Nnrf_NFManagement service if nnrf-mgmt services is configured for audit, or SCP can learn profiles using the NRF discovery service if nnrf-disc is configured for audit.

SCP maintains servingScope (serving locality) to SCP instance mapping when it gets NF status change notification from NRF for any other SCP instance that can be used for routing or forwarding the service request between SCP instances wherever applicable.

SCP determines all the SCP instances from NF-SetId published in the SCP profile. SCP instances are identified and grouped based on their respective NFSetId published.

Producer NF Registration Notification from NRF to SCP

The following image is an example of a scenario that describes how SCP receives producer NF registration notifications from NRF instances.

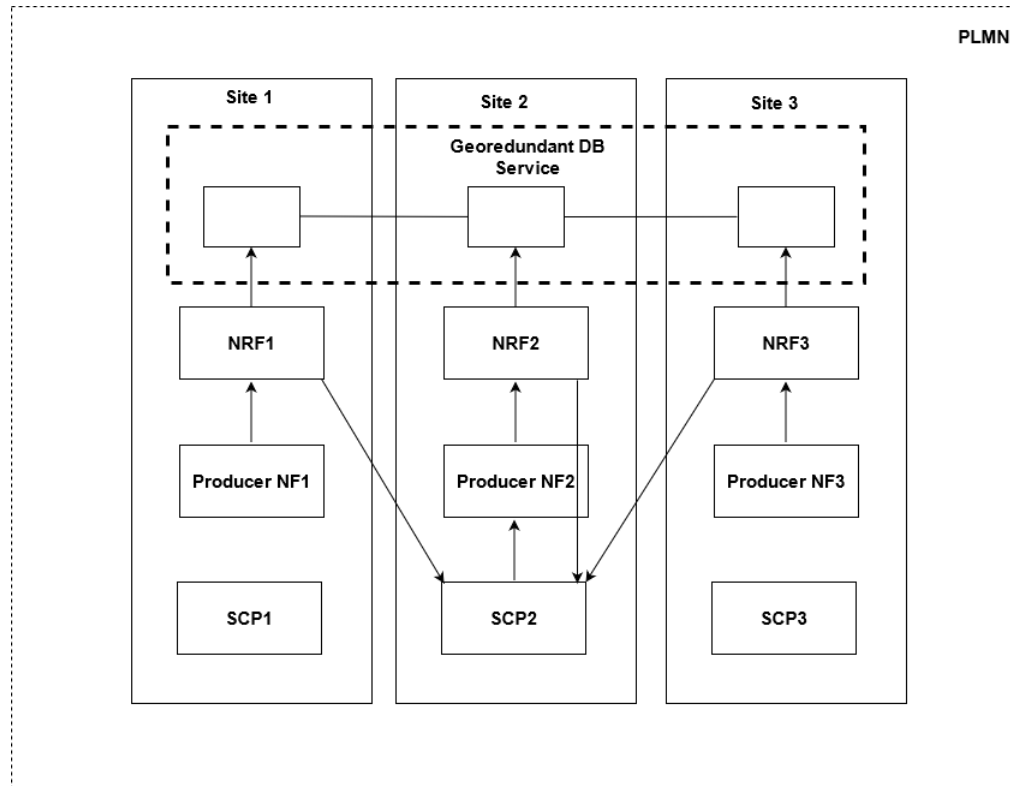Figure 8-1 Producer NF Registration Notification from NRF to SCP

There are three NRF instances, NRF1, NRF2, and NRF3, which are deployed as georedundant NRFs across three sites, in an NRF set. SCP1 and SCP3 do not establish communication with the corresponding NRF instances such as NRF1 and NRF3. However, SCP2 subscribes with NRF2 for all changes for 5G NF types. When producer NF1, NF2, and NF3 register with NRF1, NRF2, and NRF3, respectively, SCP2 receives notification regarding producer NF1, NF2, and NF3 registration from NRF1, NRF2, and NRF3.

SCP uses the `nfStatusNotificationUri` callback URI to receive notifications from NRF. `nfStatusNotificationUri` notifies SCP about registrations, deregistrations, or profile changes of any NF profile. To subscribe to NRF notifications, SCP uses the POST method.

The following format of the callback URI is used by SCP in Subscription requests:

```
http://<scp-worker FQDN or IP>:<scp-worker
Port>/ocscp/scpc-notification/v1/notification/<nrfRegionSetID>/<nftype>/
<UUID>
```

Where,

- The FQDN or IP address is determined by the deployment configuration.
- scp-worker Port indicates the service port of SCP-Worker.


- `nrfRegionSetID` indicates the NRF's region or SetID based on the NRF configuration used during deployment.
- `nfType` indicates the NF type to which the Subscription is sent.
- `UUID` is the Universally Unique ID.

SCP can process notifications containing full NFProfiles that is `nfProfile` or partial profiles that is `profileChanges`. For more information about `nfStatusNotificationUri`, see 3GPP 29.510.

5G NF Topology Audit Response from NRF

The following image is an example of a scenario that describes how SCP receives 5G NF topology audit response from NRF.

Figure 8-2 5G NF Topology Audit Response from NRF

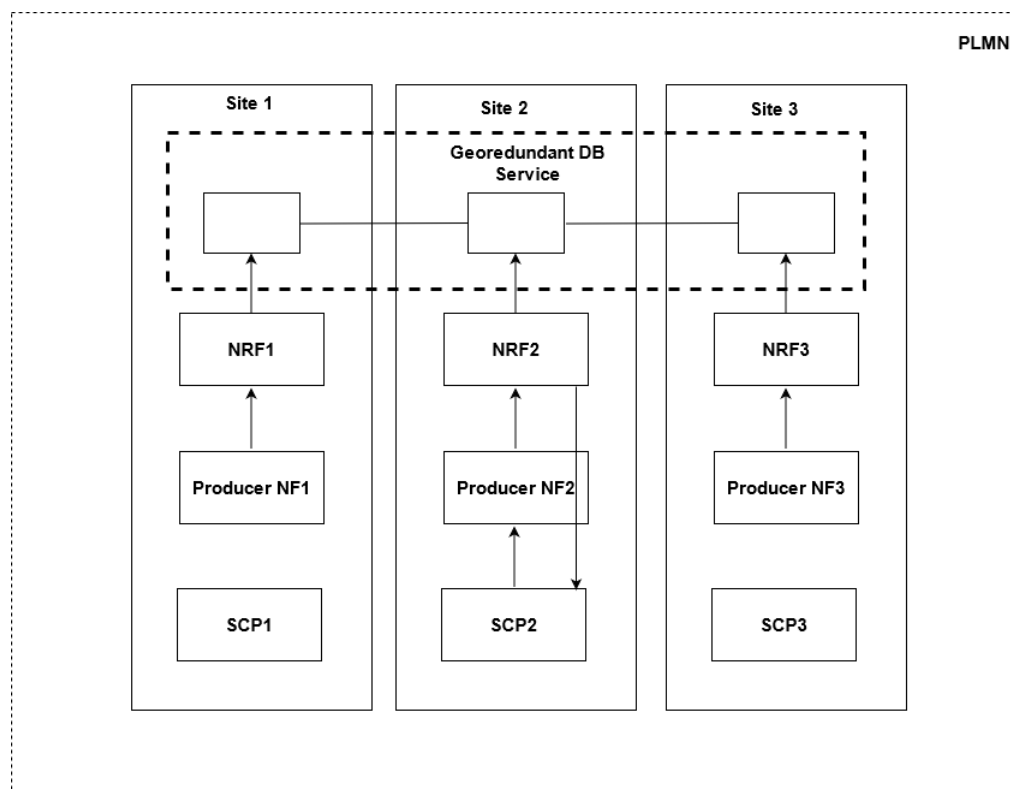

There are three NRF instances, NRF1, NRF2, and NRF3, which are deployed as georedundant NRFs across three sites, in an NRF set. Producer NF1, NF2, and NF3 register with NRF1, NRF2, and NRF3, respectively. SCP1 and SCP3 do not establish communication with the corresponding NRF instances such as NRF1 and NRF3. When SCP2 performs period audit for 5G NF types with NRF2, SCP2 receives audit response from NRF2 with all producer NF1, NF2, and NF3 irrespective of where they are registered.

9

Supported Query Parameters

This section is applicable for the Managing Delegated Discovery Response Caching for Subscriber IDs feature.

Table 9-1 Supported Query Parameter

Name	Data Type	Subscriber Id (Yes or No)	P	Description
target-nf-type	NFType	No	M	This Information Element (IE) contains the NF type of the target NF being discovered.
requester-nf-type	NFType	No	M	This IE contains the NF type of the Requester NF invoking the Nnrf_NFDiscovery service.
requester-nf-instance-id	NfInstanceId	No	O	If present, this IE contains the NF instance ID of the Requester NF.
service-names	array(ServiceName)	No	O	If this IE is included, it will contain an array of service names for which the NRF is requested to provide the list of NF profiles. The NRF will return the NF profiles that have at least one NF service matching the service names specified in this list. The returned NF service names from the NRF will be an interclause of the requested NF service names and the NF service names registered in the NF profile. If this IE is not included, the NRF will return all the NF service names registered in the NF profile. The list contains unique items.
requester-nf-instance-fqdn	Fqdn	No	O	This IE might be present for an NF discovery request within the same PLMN as the NRF. If included, this IE must contain the Fully Qualified Domain Name (FQDN) of the Requester NF that is invoking the Nnrf_NFDiscovery service. The NRF must use this to return only those NF profiles that include at least one NF service containing an entry in the 'allowedNfDomains' list (see clause 6.1.6.2.3) that matches the domain of the requester NF. This IE is ignored by the NRF if received from a requester NF belonging to a different PLMN.
target-plmn-list	array(PlmnId)	No	C	This IE is included when NF services in a different PLMN, or NF services of specific PLMN IDs in the same PLMN comprising multiple PLMN IDs, need to be discovered. When included, this IE will contain the target NF's PLMN ID. If more than one PLMN ID is included, NFs from any PLMN ID present in the list match the query parameter. When inter-PLMN service discovery occurs, the list should contain no more than one PLMN ID. This ID should appear in the service discovery request from the NF in the source PLMN to the NRF in the same PLMN, but it might not appear in the service discovery request from the source NRF to the target NRF. In such a case, if the NRF receives more than 1 PLMN ID, it will only consider the first element of the array and ignore the rest.

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscriber Id (Yes or No)	P	Description
requester-plmn-list	array(PlmnId)	No	C	This IE is included when NF services in a different PLMN need to be discovered. When included, this IE shall contain the PLMN ID(s) of the requester NF.
requester-snpn-list	array(PlmnIdNid)	No	C	This IE is included when the requester NF belongs to one or several SNPNs and the NF services of a specific SNPN need to be discovered. When present, this IE shall contain the requester NF's SNPN ID(s). The NRF uses this to return only those NF profiles of NF instances that are allowed to be discovered from the SNPNs identified by this IE, according to the "allowedSnpons" list in the NF Profile and NF Service (see clauses 6.1.6.2.2 and 6.1.6.2.3).
target-nf-instance-id	NfInstanceId	No	O	Identity of the NF instance being discovered.
target-nf-fqdn	Fqdn	No	O	FQDN of the target NF instance being discovered.
hnrf-uri	Uri	No	C	If included, this IE shall contain the API URI of the home NRF's NFDISCOVERY Service (see clause 6.2.1). It shall be included if the Requester NF has previously received such an API URI to be used for service discovery (e.g., from the NSSF in the home PLMN).
snssais	array(Snssai)	No	O	If included, this IE shall contain the list of S-NSSAIs that are served by the NF (service) instances being discovered. The NRF shall return those NF profiles or NF services of NF (service) instances that have at least one of the S-NSSAIs in this list. The S-NSSAIs included in the NF profiles or NF services of NF (service) instances returned by the NRF shall be an interclause of the S-NSSAIs requested and the S-NSSAIs supported by those NF (service) instances. (NOTE 10) When the NF Profile of the NF Instances being discovered has defined the list of supported S-NSSAIs in the "perPlmnSnssaiList", the discovered NF Instances shall be those having any of the S-NSSAIs included in this "snssais" parameter in any of the PLMNs included in the "target-plmn-list" attribute, if present; if the "target-plmn-list" is not included, the NRF shall assume that the discovery request is for any of the PLMNs it supports.
requester-snssais	array(Snssai)	No	O	If included, this IE shall contain the list of S-NSSAI of the requester NF. If this IE is included in a service discovery in a different PLMN, the requester NF shall provide S-NSSAI values of the target PLMN that correspond to the S-NSSAI values of the requester NF. The NRF shall use this to return only those NF profiles of NF instances allowed to be discovered from at least one network slice identified by this IE, according to the "allowedNssais" list in the NF Profile and NF Service (see clauses 6.1.6.2.2 and 6.1.6.2.3). (NOTE 12)

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscriber Id (Yes or No)	P	Description
plmn-specific-snssai-list	array(Plmn Snssai)	No	O	If included, this IE shall contain the list of S-NSSAI that are served by the NF service being discovered for the corresponding PLMN provided. The NRF shall use this to identify the NF services that have registered their support for the S-NSSAIs for the corresponding PLMN given. The NRF shall return the NF profiles that have at least one S-NSSAI supported in any of the PLMNs provided in this list. The per PLMN list of S-NSSAIs included in the NF profile returned by the NRF shall be an interclause of the list requested and the list registered in the NF profile. (NOTE 10).
requester-plmn-specific-snssai-list	array(Plmn Snssai)	No	O	If included, this IE shall contain the list of S-NSSAI of the requester NF for each of the PLMNs it supports. The NRF shall use this to return only those NF profiles of NF instances allowed to be discovered from at least one network slice identified by this IE, according to the "allowedNssais" and "allowedPlmns" attributes in the NF Profile and NF Service (see clauses 6.1.6.2.2 and 6.1.6.2.3). (NOTE 12)
nsi-list	array(string)	No	O	If included, this IE shall contain the list of NSI IDs that are served by the services being discovered.
dnn	Dnn	-	O	If included, this IE shall contain the DNN for which NF services serving that DNN were discovered. DNN may be included if the target NF type is, for example, "BSF," "SMF," "PCF," "PCSCF," or "UPF". The DNN shall contain the network identifier, and it may additionally contain an operator identifier. (NOTE 11). If the Snssai(s) are also included, the NF services serving the DNN will be available in the network slice(s) identified by the Snssai(s).
smf-serving-area	string	No	O	If included, this IE shall contain the serving area of the SMF. It may be included if the target NF type is "UPF".
tai	Tai	No	O	Tracking Area Identity.
amf-region-id	AmfRegionId	No	O	AMF Region Identity.
amf-set-id	AmfSetId	No	O	AMF Set Identity.
guami	Guami	No	O	Guami used to search for an appropriate AMF. (NOTE 1)
supi	Supi	Yes	O	If included, this IE shall contain the SUPI of the requester UE to search for an appropriate NF. SUPI may be included if the target NF type is, for example, "PCF," "CHF," "AUSF," "UDM," or "UDR."
ue-ipv4-address	Ipv4Addr	Yes	O	The IPv4 address of the UE for which a BSF or P-CSCF needs to be discovered.
ip-domain	string	Yes	O	The IPv4 address domain of the UE for which a BSF needs to be discovered.
ue-ipv6-prefix	Ipv6Prefix	Yes	O	The IPv6 prefix of the UE for which a BSF or P-CSCF needs to be discovered.

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscriber Id (Yes or No)	P	Description
pgw-ind	boolean	No	O	When present, this IE indicates whether a combined SMF/PGW-C or a standalone SMF needs to be discovered. true: A combined SMF/PGW-C is requested to be discovered; false: A standalone SMF is requested to be discovered.
pgw	Fqdn	No	O	If included, this IE shall contain the PGW FQDN, which is received by the AMF from the MME to find the combined SMF or PGW.
gpsi	Gpsi	Yes		If included, this IE shall contain the GPSI of the requester UE to search for an appropriate NF. GPSI may be included if the target NF type is "CHF," "PCF," "UDM," or "UDR."
external-group-identity	ExtGroupId	Yes	O	If included, this IE shall contain the external group identifier of the requester UE to search for an appropriate NF. This may be included if the target NF type is "UDM" or "UDR."
pfd-data	PfdData	No	O	When present, this IE shall contain the application identifiers and/or application function identifiers in PFD management. This may be included if the target NF type is "NEF". The NRF shall return those NEF instances that can provide the PFDs for at least one of the provided application identifiers or for at least one of the provided application function identifiers.
data-set	DataSetId	No	O	Indicates the data set to be supported by the NF to be discovered. May be included if the target NF type is "UDR."
routing-indicator	string	Yes	O	Routing indicator information that allows to route network signaling with SUCI (see 3GPP 23.003 [12]) to an AUSF and UDM instance capable of serving the subscriber. May be included if the target NF type is "AUSF" or "UDM." Pattern: "^[0-9]{1,4}\$"
group-id-list	array(NfGroupId)	No		Identity of the groups of the NFs of the target NF type to be discovered. May be included if the target NF type is "UDR," "UDM," "HSS," "PCF," "AUSF," or "CHF."
dnai-list	array(Dnai)	No		If included, this IE shall contain the data network access identifiers. It may be included if the target NF type is "UPF."
upf-iwk-eps-ind	Boolean	No	O	When present, this IE indicates whether a UPF supporting interworking with EPS needs to be discovered. true: A UPF supporting interworking with EPS is requested to be discovered; false: A UPF not supporting interworking with EPS is requested to be discovered.
chf-supported-plmn	PlmnId	No	O	If included, this IE shall contain the PLMN ID that a CHF supports (for example, in the PlmnRange of ChfInfo attribute in the NFProfile). This IE may be included when the target NF type is "CHF."

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscribe Id (Yes or No)	P	Description
preferred-locality	string	No	O	Preferred target NF location (for example, geographic location, data center). When present, the NRF shall prefer NF profiles with a locality attribute that matches the preferred locality. The NRF may return additional NFs in the response not matching the preferred target NF location, for example, if no NF profile is found matching the preferred target NF location. The NRF should set a lower priority for any additional NFs on the response not matching the preferred target NF location than those matching the preferred target NF location. (NOTE 6)
access-type	AccessType	No	C	If included, this IE shall contain the access type that is required to be supported by the target NF, such as SMF.
supported-features	Supported Features	No	O	List of features required to be supported by the target NF. This IE may be present only if the service-names attribute is present and if it contains a single service name. Otherwise, the NRF will ignore it. (NOTE 4)
required-features	array(SupportedFeatures)	No	O	List of features required to be supported by the target Network Function, as defined by the supportedFeatures attribute in NFService (see clauses 6.1.6.2.3 and 6.2.6.2.4). This IE may be present only if the service-names attribute is present. When present, the required-features attribute shall contain as many entries as the number of entries in the service-names attribute. The nth entry in the required-features attribute shall correspond to the nth entry in the service-names attribute. An entry corresponding to a service for which no specific feature is required shall be encoded as "0."
complex-query	ComplexQuery	No	O	This query parameter is used to override the default logical relationship of query parameters.
limit	integer	No	O	The maximum number of NFProfiles to be returned in the response. Minimum: 1
max-payload-size	integer	No	O	Maximum payload size (before compression, if any) of the response, expressed in kilo octets. When present, the NRF shall limit the number of NF profiles returned in the response so as not to exceed the maximum payload size indicated in the request. Default: 124. Maximum: 2000 (such as 2 million octets).

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscribe Id (Yes or No)	P	Description
max-payload-size-ext	integer	No	O	Maximum payload size (before compression, if any) of the response, expressed in kilo octets. When present, the NRF shall limit the number of NF profiles returned in the response so as not to exceed the maximum payload size indicated in the request. This query parameter is used when the consumer supports payload sizes larger than 2 million octets. Default: 124
pdu-session-types	array(Pdu SessionType)	No	O	List of the PDU session types requested to be supported by the target Network Function (such as UPF).
event-id-list	array(EventId)	No	O	If present, this attribute shall contain the list of events requested to be supported by the Nnwdaf AnalyticsInfo Service, and the NRF shall return NF, which supports all the requested events.
nwdaf-event-list	array(NwdafEvent)	No	O	If present, this attribute shall contain the list of events requested to be supported by the Nnwdaf_EventsSubscription service, and the NRF shall return NF, which supports all the requested events.
atsss-capability	AtsssCapability	No	O	When present, this IE indicates the ATSSS capability of the target UPF needs to be supported.
upf-ue-ip-addr-ind	boolean	No	O	When present, this IE indicates whether a UPF supporting allocating UE IP addresses or prefixes needs to be discovered. true: a UPF supporting UE IP addresses and prefixes is requested to be discovered; false: a UPF not supporting UE IP addresses or prefix allocation is requested to be discovered.
client-type	ExternalClientType	No	O	When present, this IE indicates that NF(s) dedicatedly serving the specified client type need to be discovered. This IE may be included when the target NF type is "LMF" or "GMLC". If no NF profile is found dedicatedly serving the requested client type, the NRF may return NF(s) not dedicatedly serving the requested client type in the response.
lmf-id	LMFIdentification	No	O	When present, this IE shall contain LMF identification to be discovered. This may be included if the target NF type is "LMF."
an-node-type	AnNodeType	No	O	If included, this IE shall contain the AN Node type, which is required to be supported by the target Network Function (such as LMF).
rat-type	RatType	No	O	If included, this IE shall contain the RAT type that is required to be supported by the target Network Function (such as LMF).
target-snpn	PlmnIdNid	No	C	This IE shall be included when the NF services of a specific SNPN need to be discovered. When included, this IE shall contain the PLMN ID and NID of the target NF.

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscribe Id (Yes or No)	P	Description
af-ee-data	AfEventExposureData	No	O	When present, this shall contain the application events and, optionally, application function identifiers and application identifiers of the AF(s). This may be included if the target NF type is "NEF."
w-agf-info	WAgfInfo	No	O	If included, this IE shall contain the W-AGF identifiers of N3 terminations which is received by the SMF to find the combined W-AGF/UPF.
tngf-info	TngfInfo	No	O	If included, this IE shall contain the TNGF identifiers of N3 terminations which is received by the SMF to find the combined TNGF or UPF.
twif-info	TwifInfo	No	O	If included, this IE shall contain the TWIF identifiers of N3 terminations which is received by the SMF to find the combined TWIF or UPF.
target-nf-set-id	NfSetId	No	O	When present, this IE shall contain the target NF Set ID (as defined in clause 28.12 of 3GPP TS 23.003 [12]) of the NF instances being discovered.
target-nf-service-set-id	NfServiceSetId	No	O	When present, this IE shall contain the target NF Service Set ID (as defined in clause 28.13 of 3GPP TS 23.003 [12]) of the NF service instances being discovered.
preferred-tai	Tai	No	O	When present, the NRF shall prefer NF profiles that can serve the TAI, or the NRF shall return NF profiles not matching the TAI if no NF profile is found matching the TAI. (NOTE 5)
nef-id	NefId	No	O	When present, this IE shall contain the NEF ID of the NEF to be discovered. This may be included if the target NF type is "NEF." (NOTE 7)
preferred-nf-instances	array(NfInstanceId)	No	O	When present, this IE shall contain a list of preferred candidate NF instance IDs. (NOTE 8)
notification-type	NotificationType	No	O	If included, this IE shall contain the notification type of default notification subscriptions that shall be registered in the NFProfile or NFService of the NF Instances being discovered. The NF profiles returned by the NRF shall contain all the registered default notification subscriptions, including the one corresponding to the notification-type parameter. (NOTE 9)
n1-msg-class	N1MessageClass	No	O	This IE may be included when the "notification-type" IE is present with the value "N1_MESSAGES". When included, this IE shall contain the N1 message class of default notification subscriptions that shall be registered in the NFProfile or NFService of the NF Instances being discovered. The NF profiles returned by the NRF shall contain all the registered default notification subscriptions, including the one corresponding to the n1-msg-class parameter. (NOTE 9)

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscribe Id (Yes or No)	P	Description
n2-info-class	N2InformationClass	No	O	This IE may be included when the "notification-type" IE is present with the value "N2_INFORMATION." If included, this IE shall contain the notification type of default notification subscriptions that shall be registered in the NFProfile or NFService of the NF Instances being discovered. The NF profiles returned by the NRF shall contain all the registered default notification subscriptions, including the one corresponding to the n2-info-class parameter. (NOTE 9)
serving-scope	array(string)	No	O	If present, this attribute shall contain the list of areas that can be served by the NF instances to be discovered. The NRF shall return NF profiles of NFs that can serve all the areas requested in this query parameter.
imsi	string	No	O	If included, this IE shall contain the IMSI of the requester UE to search for an appropriate NF. IMSI may be included if the target NF type is "HSS". pattern: "[0-9]{5,15}"
ims-private-identity	string	No	O	If included, this IE shall contain the IMS private identity of the requester UE to search for an appropriate NF. IMS Private Identity may be included if the target NF type is "HSS."
ims-public-identity	string			If included, this IE shall contain the IMS public identity of the requester UE to search for an appropriate NF. IMS Public Identity may be included if the target NF type is "HSS."
msisdn	string			If included, this IE shall contain the MSISDN of the requester UE to search for an appropriate NF. IMS Public Identity may be included if the target NF type is "HSS".
internal-group-identity	GroupId	No	O	If included, this IE shall contain the internal group identifier of the UE to search for an appropriate NF. This may be included if the target NF type is "UDM."

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscribe Id (Yes or No)	P	Description
preferred-api-versions	map(string)	No	O	When present, this IE indicates the preferred API version of the services that are supported by the target NF instances. The key of the map is the service name (see clause 6.1.6.3.11) for which the preferred API version is indicated. Each element carries the API version indication for the service indicated by the key. The NRF may return additional NFs in the response not matching the preferred API versions, for example, if no NF profile is found matching the preferred- API -versions. An API Version Indication is a string formatted as {operator}{API Version}. The following operators will be supported: "=" matches a version equal to the version value indicated. "=" matches a version equal to the version value indicated. ">" matches any version greater than the version value indicated. ">=" matches any version greater than or equal to the version value indicated. "<" matches any version less than the version value indicated. "<=" matches any version less than or equal to the version value indicated. "^" matches any version compatible with the version indicated, such as, any version with the same major version as the version indicated. Precedence between versions is identified by comparing the Major, Minor, and Patch version fields numerically, from left to right. If no operator or an unknown operator is provided in API Version Indication, "=" operator is applied. Example of API Version Indication: Case1: "=1.2.4.operator-ext" or "1.2.4.operator-ext" means matching the service with API version "1.2.4.operator-ext" Case2: ">1.2.4" means matching the service with API versions greater than "1.2.4" Case3: "^2.3.0" or "^2" means matching the service with all API versions with major version "2".
v2x-support-ind	boolean	No	O	When present, this IE indicates whether a PCF supporting V2X policy or parameter provisioning needs to be discovered. true: a PCF supporting V2X policy or parameter provisioning is requested to be discovered; false: a PCF not supporting V2X policy or parameter provisioning is requested to be discovered.

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscriber Id (Yes or No)	P	Description
redundant-gtpu	boolean	No	O	When present, this IE indicates whether a UPF supporting redundant GTP-U paths needs to be discovered. true: a UPF supporting redundant GTP-U paths is requested to be discovered; false: a UPF not supporting redundant GTP-U paths is requested to be discovered.
redundant-transport	boolean	No	O	When present, this IE indicates whether a UPF supporting redundant transport paths on the transport layer in the corresponding network slice needs to be discovered. true: a UPF supporting redundant transport paths on the transport layer is requested to be discovered; false: a UPF not supporting redundant transport paths on the transport layer is requested to be discovered. If the Snssai(s) are also included, the UPF supporting redundant transport paths on the transport layer shall be available in the network slice(s) identified by the Snssai(s).
ipups	boolean	No	O	When present, this IE indicates whether a UPF that is configured for IPUPS is requested to be discovered. true: a UPF that is configured for IPUPS is requested to be discovered; false: a UPF that is not configured for IPUPS is requested to be discovered.
scp-domain-list	array(string)	No	O	When present, this IE shall contain the SCP domains the target NF or SCP belongs to. The NRF shall return NF or SCP profiles that belong to all the SCP domains provided in this list.
address-domain	Fqdn	No	O	If included, this IE shall contain the address domain that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP."
ipv4-addr	Ipv4Addr	No	O	If included, this IE shall contain the IPv4 address that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP."
ipv6-prefix	Ipv6Prefix	No	O	If included, this IE shall contain the IPv6 prefix that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP".
served-nf-set-id	NfSetId	No	O	When present, this IE shall contain the NF Set ID that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP".
remote-plmn-id	PlmnId	No	O	If included, this IE shall contain the remote PLMN ID that shall be reachable through the SCP. This IE may be included when the target NF type is "SCP".

Table 9-1 (Cont.) Supported Query Parameter

Name	Data Type	Subscriber Id (Yes or No)	P	Description
data-forwarding	boolean	No	O	This may be included if the target NF type is "UPF." (NOTE 13) When present, the IE indicates whether UPFs configured for data forwarding need to be discovered. true: UPF(s) configured for data forwarding are requested to be discovered; false: UPF(s) not configured for data forwarding are requested to be discovered.
preferred-full-plmn	boolean	No	O	When present, the NRF shall prefer NF profile(s) that can serve the full PLMN (can serve any TAI in the PLMN), or the NRF shall return other NF profiles if no NF profile serving the full PLMN is found: true: NF instances serving the full PLMN are preferred; false: NF instances serving the full PLMN are not preferred. (NOTE 14)
requester-features	Supported Features	No	C	Nnrf_NFDiscovery features are supported by the Requester NF that is invoking the Nnrf_NFDiscovery service. The Requester NF shall include this IE if it supports at least one of the following features: - Service-Map This IE may be included elsewhere.
realm-id	string	No	O	May be included if the target NF type is "UDSF." If included, this IE shall contain the realm- ID for which a UDSF shall be discovered.
storage-id	string	No	O	May be included if the target NF type is "UDSF" and realm-id is included. If included, this IE shall contain the storage-id for the realm-id indicated in the realm-id IE for which a UDSF shall be discovered.
vsmf-support-ind	boolean	No	O	If included, this IE shall indicate that target SMF(s) that support V-SMF capability are preferred. This IE may be included when the target NF type is "SMF." (NOTE 15)
gmlc-number	string	No	O	If included, this IE shall contain the GMLC number, which should be supported by the target GMLC. It may be included if the target NF type is "GMLC." Pattern: "^[0-9]{5,15}\$"

10

Natively Supported NF Types and Services

SCP supports the following NF types and service types natively. This means that a freshly deployed SCP includes default routing options for these 3GPP defined NF types and NF services. You can add additional NF types and services as described in [Support for 3GPP Defined NFs, Custom NFs, and Custom NF Services](#).

Table 10-1 Natively Supported NF Types and Services

Network Function	Service Types
5G_EIR	n5g-eir-eic
AMF	namf-comm, namf-evts, namf-loc, namf-mt
AUSF	nausf-auth, nausf-sorprotection, nausf-upuprotection
BSF	nbsf-management
CHF	nchf-convergedcharging, nchf-spendinglimitcontrol, nchf-spendinglimitcontrol
LMF	nlmf-loc
NEF	nnef-pfdmanagement, nnef-eventexposure, nnef-afsessionwithqos - Nnef_EventExposure: Allows NF service consumers to subscribe to and modify application events and to notify NF service consumers about observed events on the NEF. - Nnef_AFsessionWithQoS: Allows an AF to request the network to provide a specific Quality of service (QoS) for a session.
NRF	nnrf-disc, nnrf-nfm, nnrf-oauth2
NSSF	nssf-nssaiavailability, nssf-nsselection
NWDAF	nnwdaf-analyticsinfo, nnwdaf-eventssubscription
PCF	npcf-am-policy-control, npcf-bdtpolicycontrol, npcf-eventexposure, npcf-policyauthorization, npcf-smpolicycontrol, npcf-ue-policy-control
SEPP	NA
SMF	nsmf-event-exposure, nsmf-pdusession
SMSF	nsmsf-sms
UDM	nudm-ee, nudm-pp, nudm-sdm, nudm-ueau, nudm-uecm
UDR	nudr-dr, nudr-group-id-map
NA	5g-sbi-notification, nmediation-http, ocscp-sds, scpc-notification Note: Notifications from NRF to scpc-notification will be pegged with the service type as scpc-notification.

Supported Headers

The following tables list the headers supported by SCP:

Table 11-1 Supported 3GPP Custom Headers

Custom Header Name	Description
3gpp-Sbi-Message-Priority	This header is used to specify the HTTP/2 message priority for 3GPP service based interfaces.
3gpp-Sbi-Callback	The header is used to identify a particular type of callback, for example, notification.
3gpp-Sbi-Target-apiRoot	The header contains the apiRoot of the target URI in a message request sent to an SCP instance when using indirect communication such as Model C and Model D. SCP uses this header to indicate the apiRoot of the target URI if a new HTTP server is selected or reselected and if there is no location header in the message response. SCP adds this header to message responses when: 3gpp-Sbi-Discovery-target-nf-set-id is present in the message request and producer selection is done by SCP. 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Discovery-target-NfSetid are present in the message request and SCP has done producer reselection. 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding are present in the message request and SCP has done producer reselection.
3gpp-Sbi-Routing-Binding	This header is used in a service request to signal binding information to direct the service request to an HTTP server that has the targeted NF service resource context.
3gpp-Sbi-Binding	This header is used to signal binding information related to an NF service resource to a future consumer, such as an HTTP client, of that resource.
3gpp-Sbi-Discovery-*	This header, which begins with the prefix 3gpp-Sbi-Discovery, is used in indirect communication mode for discovery and selection of a suitable producer by the SCP. Such headers can be included in any SBI message and include information allowing an SCP to find a suitable producer based on the consumer's included delegated discovery parameters.
3gpp-Sbi-Oci	This header is utilized by overloaded SCPs, SEPPs, consumer NFs, and producer NFs to transmit Overload Control Information (OCI) within message requests and responses to peers. The OCI includes attributes such as Overload Timestamp, Overload-Reduction-Metric, Period-of-Validity, and Scope within the 3gpp-Sbi-Oci header.
3gpp-Sbi-Producer-Id	This header contains instance ID of the producer NF. In case of producer selection or reselection, that is, alternate routing, in indirect communication modes such as Model C or Model D, this header is used in a message response from SCP to the consumer NF to identify the producer NF. SCP adds this header to message responses when: 3gpp-Sbi-Discovery-target-nf-set-id is present in the message request and producer selection is done by SCP. 3gpp-Sbi-Target-apiRoot and 3GPP-Sbi-Discovery-target-NfSetid are present in the message request and SCP has done producer reselection. 3gpp-Sbi-Target-apiRoot and 3gpp-sbi-routing-binding are present in the message request and SCP has done producer reselection.
3gpp-Sbi-Lci	This header is used by a producer NF to send Load Control Information (LCI) to the consumer NF.
3gpp-Sbi-Client-Credentials	This header is used by a consumer NF to send a Client Credential Assertion (CCA) to the NRF or to the producer NF.

Table 11-1 (Cont.) Supported 3GPP Custom Headers

Custom Header Name	Description
3gpp-Sbi-Target-Nf-Id	This header is used in a 307 Temporary Redirect or 308 Permanent Redirect response to identify the target NF service instance towards which the request is redirected.
3gpp-Sbi-Access-Scope	This header is used in a service request for indirect communication to indicate the access scope of the service request for NF service access authorization.
3gpp-Sbi-Access-Token	This header is used in a service response forwarded by the SCP to an NF service consumer to provide an access token for possible reuse in subsequent service requests.
3gpp-Sbi-Correlation-Info	This header may be used to contain correlation information, for example, UE identity, that may be used by an operator in various offline network management, performance analysis and troubleshooting tools/applications to identify messages (requests, responses, subscriptions, notifications) related to a particular subscriber.

SCP also supports the HTTP standard headers. For more information, see *3GPP TS 29.500 V16.10.0, Table 5.2.2.2-1*.

Table 11-2 Standard Headers Supported by SCP

Header Name	Description
Mandatory to Support HTTP Request Standard Headers	
Accept	This header specifies acceptable response media types. If SCP receives this header in a request, it forwards it as is and does not perform any action on it.
Accept-Encoding	This header indicates the type of response content encoding, for example, GZIP, is acceptable in the response. If the received data is in GZIP format, SCP decompresses it if required and then compresses it to GZIP before forwarding it.
Content-Length	This header provides the anticipated size, as a decimal number of octets, for a potential content.
Content-Type	This header indicates the media type of the associated representation.
User-Agent	This header identifies the NF type of the HTTP/2 client.
Cache-Control	This header is used in some HTTP/2 requests to provide the HTTP cache-control directives that the client can accept from the server. If SCP receives this header in a request, it forwards it as is and does not perform any action on it.
If-Modified-Since	This header is used in a conditional GET request to re-validate server. This is used in conjunction with the LastModified server response header to retrieve content if the content has been modified from the cached version. If SCP receives this header in a request, it forwards it as is and does not perform any action on it.
If-None-Match	This header is used in a conditional GET request. This is used in conjunction with the ETag server response header to retrieve content if the tag value of the resource on the server differs from the tag value in the If-None-Match header. If SCP receives this header in a request, it forwards it as is and does not perform any action on it.

Table 11-2 (Cont.) Standard Headers Supported by SCP

Header Name	Description
If-Match	This header is used in a conditional POST, PUT, DELETE, or PATCH request. This is used in conjunction with the ETag server response header to update or remove content if the tag value of the resource on the server matches the tag value in the If-Match header. If SCP receives this header in a request, it forwards it as is and does not perform any action on it.
Via	This header is inserted by HTTP proxies. SCP adds its own information in this header while forwarding.
Authorization	This header is used if OAuth 2.0 based access authorization with "Client Credentials" grant type is used as specified in subclause 13.4.1 of 3GPP TS 33.501 [17], clause 7 of IETF RFC 6749 [22] and IETF RFC 6750 [23].
Mandatory to Support HTTP Response Standard Headers	
Content-Length	This header provides the anticipated size, as a decimal number of octets, for a potential content.
Content-Type	This header indicates the media type of the associated representation.
Retry-After	This header indicates the waiting period for the user agent before making a follow-up request.
Content-Encoding	This header indicates to the HTTP/2 client the content encodings, for example, gzip, applied to the resource representation beyond those inherent in the media type.
Location	This header is used in some responses to refer to a specific resource pertaining to the response. It is updated by SCP to absolute URI if the location header in response has relative URI.
Cache-Control	This header is used in some responses such as NRF responses to queries, to provide HTTP response cache control directives. The cache directives "no-cache", "no-store", "maxage", and "must-revalidate" values are supported. It is not supported by SCP and is forwarded as it is.
Age	This header is inserted by HTTP proxies when returning a cached response. This header conveys the sender's estimate of the amount of time since the response was generated or successfully validated at the origin server. It is not supported by SCP.
Last-Modified	This header is sent to allow for conditional GET with the IfModified-Since header. If SCP receives this header in a response, it forwards it as is and does not perform any action on it.
ETag	This header is sent to allow for conditional GET with the If-None-Match header or a conditional POST, PUT, PATCH, or DELETE with the If-Match header. If SCP receives this header in a response, it forwards it as is and does not perform any action on it.
Via	This header is inserted by HTTP proxies.
Allow	This header is used to indicate methods supported by the target resource. If SCP receives this header in a response, it forwards it as is and does not perform any action on it.
WWW-Authenticate	This header is included when a producer NF rejects a request with a "401 Unauthorized" status code, for example, when a request is sent without an OAuth 2.0 access token or with an invalid OAuth 2.0 access token.

A

HTTP Status Codes and Applicability for Rerouting

This section describes the HTTP status codes usage on SBI. HTTP status codes are carried in the ":status" pseudo header field in HTTP/2, as defined in subclause 8.1.2.4 in IETF RFC 7540.

The following table specifies HTTP status codes per HTTP method that is supported on SBI. The support of the HTTP status code is:

- Mandatory, which is marked in table as "**M**". This signifies that all 3GPP NFs support the processing of the specific HTTP status code for the specific HTTP method, when received in a HTTP response message. In such cases, the 3GPP NF also supports the handling of the "ProblemDetails" JSON object with the Content-Type header field set to the value "application/problem+json" for HTTP status codes 4xx and 5xx if the corresponding API definition in the related technical specification does not specify another response body for the corresponding status code.
- Service specific, which is marked in table as "**SS**" and means that the requirement to process the HTTP status code depends on the definition of the specific API.
- Not applicable, which is marked in table as "**N/A**". This means that the specific HTTP status code shall not be used for the specific HTTP method within the 3GPP NFs.
- The Applicable for Rerouting column describes if the status code is applicable for rerouting at SCP. These status codes can be configured in routing options for each NF services.

NOTE 1: "200 OK" response used on SBI shall contain body.

NOTE 2: If the NF acting as an HTTP Client receives 2xx response code not appearing in table, the NF shall treat the received 2xx response: - as "204 No Content" if 2xx response does not contain body; and - as "200 OK" if 2xx response contains body.

HTTP Status Code Supported on SBI

The following tables describe HTTP status codes supported on SBI:

- [Table A-1](#)
- [Table A-2](#)

Table A-1 HTTP Status Codes Supported on SBI as Defined in 3GPP TS29.500

HTTP Status Code	HTTP Method (DELETE)	HTTP Method (GET)	HTTP Method (PATCH)	HTTP Method (POST)	HTTP Method (PUT)	Applicable for Rerouting
100 Continue	N/A	N/A	N/A	N/A	N/A	No
200 OK (NOTE 1)	SS	M	SS	SS	SS	No
201 Created	N/A	N/A	N/A	SS	SS	No
202 Accepted	SS	N/A	SS	SS	SS	No
204 No Content (NOTE 2)	M	N/A	SS	SS	SS	No
300 Multiple Choices	N/A	N/A	N/A	N/A	N/A	No

Table A-1 (Cont.) HTTP Status Codes Supported on SBI as Defined in 3GPP TS29.500

HTTP Status Code	HTTP Method (DELETE)	HTTP Method (GET)	HTTP Method (PATCH)	HTTP Method (POST)	HTTP Method (PUT)	Applicable for Rerouting
303 See Other	SS	SS	N/A	SS	SS	Yes
307 Temporary Redirect 307 (Should be included as part of 3xx)	SS	SS	SS	SS	SS	Yes
308 Permanent Redirect 308 (Should be included as part of 3xx)	SS	SS	SS	SS	SS	Yes
400 Bad Request	M	M	M	M	M	Yes
401 Unauthorized	M	M	M	M	M	Yes
403 Forbidden	SS	SS	SS	SS	SS	Yes
404 Not Found	SS	SS	SS	SS	SS	Yes
405 Method Not Allowed	SS	SS	SS	SS	SS	Yes
406 Not Acceptable	N/A	N/A	N/A	N/A	N/A	Yes
408 Request Timeout	SS	SS	SS	SS	SS	Yes
409 Conflict 409 (should be included as part of "retriable-4xx")	N/A	N/A	SS	SS	SS	Yes
410 Gone	SS	SS	SS	SS	SS	Yes
411 Length Required	N/A	N/A	M	M	M	Yes
412 Precondition Failed	SS	SS	SS	SS	SS	Yes
413 Payload Too Large	N/A	N/A	M	M	M	Yes
414 URI Too Long	N/A	M	N/A	N/A	N/A	Yes
415 Unsupported Media Type	N/A	N/A	M	M	M	Yes
429 Too Many Requests	N/A	N/A	N/A	N/A	N/A	Yes
500 Internal Server Error	M	M	M	M	M	Yes
501 Not Implemented	SS	SS	SS	SS	SS	Yes
502 Bad Gateway 502 (Should be included as part of gateway error and "5xx")	SS	SS	SS	SS	SS	Yes
503 Service Unavailable 503 (Should be included as part of "5xx")	M	M	M	M	M	Yes
504 Gateway Timeout 504 (Should be included as part of "5xx")	SS	SS	SS	SS	SS	Yes

Table A-2 Additional Status Codes Applicable for Reroute Condition List (reRouteConditionList)

HTTP Status Code or Local Condition	Applicable for Rerouting
301 Moved Permanently	Yes
302 Found	Yes
304 Not Modified	Yes
407 Proxy Authentication Required	Yes

Table A-2 (Cont.) Additional Status Codes Applicable for Reroute Condition List (reRouteConditionList)

HTTP Status Code or Local Condition	Applicable for Rerouting
416 Range Not Satisfiable	Yes
417 Expectation Failed	Yes
421 Misdirected Request	Yes
422 Unprocessable Entity	Yes
425 Too Early	Yes
426 Upgrade Required	Yes
428 Precondition Required	Yes
431 Request Header Fields Too Large	Yes
451 Unavailable For Legal Reasons	Yes
505 HTTP Version Not Supported	Yes
506 Variant Also Negotiates	Yes
507 Insufficient Storage	Yes
508 Loop Detected	Yes
510 Not Extended	Yes
511 Network Authentication Required	Yes
5xx Server Errors	Yes
timeout	Yes
connectionError	Yes

NF as HTTP Client

Besides the HTTP Status Codes defined in the API specification, a NF as HTTP client should support handling of 1xx, 3xx, 4xx and 5xx HTTP Status Codes specified in above table, following the client behavior in corresponding IETF RFC where the received HTTP Status Code is defined.

When receiving a not recommended or not recognized 1xx, 3xx, 4xx or 5xx HTTP Status Code, a NF as HTTP client should treat it as x00 status code of the class, as described in clause 6 of IETF RFC 7231.

If 100, 200/204, 300, 400 or 500 response code is not defined by the API specification, the client may follow guidelines below:

- For 1xx (Informational):
 - Discard the response and wait for final response.
- For 2xx (Successful):
 - Consider the service operation is successful if no mandatory information is expected from the response payload in subsequent procedure.
 - If mandatory information is expected from response payload in subsequent procedure, parse the payload following description in subclause 6.2.1 of IETF RFC 7231 [11]. If parse is successful and mandatory information is extracted, continue with subsequent procedure.
 - Otherwise, consider service operation has failure and start failure handling.
- For 3xx (Redirection):
 - Retry the request towards the directed resource referred in the Location header, using same request method.

- For 4xx (Client Error):
 - Validate the request message and make correction before resending. Otherwise, stop process and go to error handling procedure.
- For 5xx (Server Error):
 - Stop process and go to error handling process.

NF as HTTP Server

A NF acting as an HTTP server is able to generate HTTP status codes specified in above table per indicated HTTP method.

An HTTP method which is not supported by 5GC SBI API specification is rejected with the HTTP status code "501 Not Implemented".

NOTE 1: In this case, the NF does not need to include in the HTTP response the "cause" attribute indicating corresponding error since the HTTP status code "501 Not Implemented" itself provides enough information of the error, that is, the NF does not recognize the HTTP method.

If the specified target resource does not exist, the NF rejects the HTTP method with the HTTP status code "404 Not Found".

If the NF supports the HTTP method but not by a target resource, the NF rejects the HTTP method with the HTTP status code "405 Method Not Allowed" and includes in the response an Allow header field containing the supported method(s) for that resource.

NOTE 2: In this case, the NF does not need to include in the HTTP response the "cause" attribute indicating corresponding error since the HTTP status code "405 Method Not Allowed" itself provides enough information of the error and hence the Allow header field lists HTTP method(s) supported by the target resource.

If the received HTTP request contains incorrect optional IE, the NF discards the incorrect IE.

If the NF supports the HTTP method by a target resource but the NF cannot successfully fulfill the received request, the following requirements apply.

A NF as HTTP Server should map application errors to the most similar 3xx/4xx/5xx HTTP status code specified in table 5.2.7.1-1. If no such code is applicable, it should use "400 Bad Request" status code for errors caused by client side or "500 Server Internal Error" status code for errors caused on server side.

If the received HTTP request contains unsupported payload format, the NF rejects the HTTP request with the HTTP status code "415 Unsupported Media Type". If the HTTP PATCH method is rejected, the NF includes the Accept-Patch header field set to the value of supported patch document media types for a target resource i.e. to "application/merge-patch+json" if the NF supports "JSON Merge Patch" and to "application/json-patch+json" if the NF supports "JSON Patch". If the received HTTP PATCH request contains both "JSON Merge Patch" and "JSON Patch" documents and the NF supports only one of them, the NF ignores unsupported patch document.

NOTE 3: The format problem might be due to the request's indicated Content-Type or Content-Encoding header fields, or as a result of inspecting the payload body directly.

If the received HTTP request contains payload body larger than the NF is able to process, the NF rejects the HTTP request with the HTTP status code "413 Payload Too Large".

If the result of the received HTTP POST request used for a resource creation is equivalent to the existing resource, the NF rejects the HTTP request with the HTTP status code "303 See

Other" and includes in the HTTP response a Location header field set to the URI of the existing resource.

Protocol and application errors common to several 5GC SBI API specifications for which the NF includes in the HTTP response a payload body ("ProblemDetails" data structure or application specific error data structure) with the "cause" attribute indicating corresponding error are listed in below table.

Table A-3 Protocol and Application Errors

Parameters	HTTP status code	Description
INVALID_API	400 Bad Request	The HTTP request contains an unsupported API name or API version in the URI.
INVALID_MSG_FORMAT	400 Bad Request	The HTTP request has an invalid format.
INVALID_QUERY_PARAM	400 Bad Request	The HTTP request contains an unsupported query parameter in the URI.
MANDATORY_IE_INCORRECT	400 Bad Request	A mandatory IE or conditional IE in data structure, but mandatory required, for an HTTP method was received with a semantically incorrect value. (NOTE 1)
MANDATORY_IE_MISSING	400 Bad Request	IE which is defined as mandatory or as conditional in data structure, but mandatory required, for an HTTP method is not included in the payload body of the request. (NOTE 1)
UNSPECIFIED_MSG_FAILURE	400 Bad Request	The request is rejected due to unspecified client error. (NOTE 2)
MODIFICATION_NOT_ALLOWED	403 Forbidden	The request is rejected because the contained modification instructions attempt to modify IE which is not allowed to be modified.
SUBSCRIPTION_NOT_FOUND	404 Not Found	The request for modification or deletion of subscription is rejected because the subscription is not found in the NF.
RESOURCE_URI_STRUCTURE_NOT_FOUND	404 Not Found	The request is rejected because a fixed part after the first variable part of an "apiSpecificResourceUriPart" (as defined in subclause 4.4.1 of 3GPP TS 29.501) is not found in the NF. This fixed part of the URI may represent a sub-resource collection (e.g. contexts, subscriptions, policies) or a custom operation. (NOTE 5)
INCORRECT_LENGTH	411 Length Required	The request is rejected due to incorrect value of a Content-length header field.

Table A-3 (Cont.) Protocol and Application Errors

Parameters	HTTP status code	Description
NF_CONGESTION_RISK	429 Too Many Requests	The request is rejected due to excessive traffic which, if continued over time, may lead to (or may increase) an overload situation.
INSUFFICIENT_RESOURCES	500 Internal Server Error	The request is rejected due to insufficient resources.
UNSPECIFIED_NF_FAILURE	500 Internal Server Error	The request is rejected due to unspecified reason at the NF. (NOTE 3)
SYSTEM_FAILURE	500 Internal Server Error	The request is rejected due to generic error condition in the NF.
NF_CONGESTION	503 Service Unavailable	The NF experiences congestion and performs overload control, which does not allow the request to be processed. (NOTE 4)

NOTE 1: "invalidParams" attribute is included in the "ProblemDetails" data structure indicating missing or incorrect IE.

NOTE 2: This application error indicates error in the HTTP request and there is no other application error value that can be used instead.

NOTE 3: This application error indicates error condition in the NF and there is no other application error value that can be used instead.

NOTE 4: If the reason for rejection is a temporary overload, the NF may include in the response a Retry-After header field to indicate how long the service is expected to be unavailable.

NOTE 5: If the request is rejected because of an error in the URI before the first variable part of "apiSpecificResourceUriPart", then the "404 Not Found" HTTP status code may be sent without the "ProblemDetails" data structure indicating protocol or application error.

B

Error Codes Generated by SCP

The following table describes HTTP error codes generated by SCP:

Note

In the following table, consumer NF refers to the client, and producer NF refers to the server.

Table B-1 SCP Generated Error Codes

HTTP Status Code	Protocol or Application Error	Sample Error Scenarios at SCP
400 Bad Request	NF_DISCOVERY_FAILURE	Indicates that an empty list of NF profiles is received in the delegated NF discovery response.
400 Bad Request	UNSPECIFIED_MSG_FAILURE	- Indicates that the message could not be routed due to the unavailability of routing destinations for the incoming Inter-PLMN request after Delegated NF Discovery. - Indicates that the message could not be routed due to the unavailability of routing destinations for the incoming InterPLmn request with the received 3gpp-sbi-target-apiroot header. - Indicates that the message could not be routed because the eligible producer NF was filtered out for OCI.
400 Bad Request	INVALID_ACCESS_TOKEN	Indicates that the message could not be routed due to an invalid OAuth2 access token.
400 Bad Request	ACCESS_TOKEN_NOT_RECEIVED	Indicates that the request could not be routed because OAuth2 access token was not received from consumer NF.
400 Bad Request	MISSING_ACCESS_TOKEN_INFO	Indicates that the message could not be routed because the discovery headers, required to obtain the OAuth2 access token, are missing from the received request.
400 Bad Request	MANDATORY_QUERY_PARAM_MISSING	Indicates that the received SBI request does not contain all mandatory discovery headers required for Delegated NF Discovery.
400 Bad Request	MANDATORY_IE_INCORRECT	- Indicates that the SBI request received has a malformed 3gpp-sbi-routing-binding header. - Indicates that the received SBI request has imperfectly formed target PLMN. - Indicates that the received SBI request has a malformed default notification request. - Indicates that the message could not be routed due to an invalid host value received in the 3gpp-sbi-target-apiroot header.
400 Bad Request	MANDATORY_IE_MISSING	Indicates that the message could not be routed due to the absence of expected headers required to select a producer NF for routing.
400 Bad Request	INVALID_API	Indicates that the message could not be routed due to the presence of an API version in the incoming SBI request that is not supported by the producer NF, as per the learned NF profile available at SCP.
403 Forbidden	ACCESS_TOKEN_DENIED	Indicates that the message could not be routed due to OAuth2 access token being denied.

Table B-1 (Cont.) SCP Generated Error Codes

HTTP Status Code	Protocol or Application Error	Sample Error Scenarios at SCP
403 Forbidden	CCA_VERIFICATION_FAILURE	Indicates that the received CCA header failed validation.
404 Not Found	-	Indicates that the message could not be routed due to the absence of a learnt producer NF for the received 3gpp-sbi-routing-binding header and the absence of the 3gpp-sbi-target-apiroot header.
429 Too Many Requests	NF_CONGESTION_RISK	This error code is sent in any of the following conditions: • The message could not be routed due to pod overload. • The message could not be routed because the ingress rate was more than the allowed rate configured for the consumer NF as specified by the rules configured in the Ingress Rate Limiter REST API. • The message could not be routed because the egress rate was more than the allowed rate configured for the producer NF as specified by the rules configured in the Egress Rate Limiter REST API.
431 Request Header Fields Too Large	-	For HTTP/2, SCP sends 431 responses with no details when the header size is greater than 8 KB.
500 Internal Server Error	-	• Indicates that an error response was received by the SCP-Worker client from the Mediation service. • Indicates that the current object pool is exhausted and no streamInfo objects are available. • Indicates that a request is received with an incorrect value of a Content-Length header field. • Indicates that a request payload size (Content-Length) has exceeded the allowed threshold (256KB).

Table B-1 (Cont.) SCP Generated Error Codes

HTTP Status Code	Protocol or Application Error	Sample Error Scenarios at SCP
500 Internal Server Error	UNSPECIFIED_NF_FAILURE	- Indicates that a decode failure occurred when processing the response received from the mediation. - Indicates that the message could not be routed because the access token request from the SCP-worker to the SCP-NrfProxy-Oauth service timed out. - Indicates that the message could not be routed because the access token request from the SCP-worker to the SCP-NrfProxy-Oauth service encountered a transport error. - Indicates that the message could not be routed because the access token request from SCP-worker to SCP-NrfProxy-Oauth encountered an exception other than TimeoutException, ConnectException, or UnknownHostException. - Indicates that the message could not be routed because the access token request from SCP-Worker to SCP-NrfProxy-Oauth failed due to decoding exception in the access token error response body to the ProblemDetails instance. - Indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to an exception other than TimeoutException, ConnectException, or UnknownHostException. - Indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to decoding exception in the delegated NF discovery error response body to the ProblemDetails instance. - Indicates that the message could not be routed due to downstream task queue being full. - Indicates that the delegated discovery request from SCP-Worker to SCP-NrfProxy failed due to TimeoutException. - Indicates that the delegated discovery request from the SCP-worker to the SCP-NrfProxy service failed due to a WebClientRequestException. - Indicates that message could not be routed due to an exception caused failure of downstream asynchronous call. - Indicates that the message could not be routed due to an exception encountered on the request processing path. - Indicates that the message could not be routed due to an exception encountered during SBI message processing. - Indicates that the message could not be routed due to an exception encountered on the response processing path.
500 Internal Server Error	UNKNOWN_STATUS_CODE	Indicates that SCP has received a nonstandard HTTP status code from a producer NF.
500 Internal Server Error	NF_SERVICE_FAILURE	- SCP sends this error by default when OCI is enabled, the selected producer NF is overloaded, and no alternate is available. - Indicates that the message could not be routed because the selected producer NF is congested and there is no other eligible producer NF available for routing.
504 Gateway Timeout	TIMED_OUT_REQUEST	- Indicates that the message could not be routed due to a response timeout at SCP, based on the 3GPP-sbi-max-rsp-time header. - Indicates that the message could not be routed because a TimeoutException was encountered at the Worker Client while reaching the upstream producer NF. - Indicates that the message could not be routed because the total transaction timeout for the service was reached.

Table B-1 (Cont.) SCP Generated Error Codes

HTTP Status Code	Protocol or Application Error	Sample Error Scenarios at SCP
504 Gateway Timeout	TARGET_NF_NOT_REACHABLE	- Unable to connect to the producer NF, and alternate routing is disabled (service unavailable). - Indicates that the message could not be routed because WebClientRequestException was encountered at the Worker Client while reaching upstream the producer NF. - Indicates that the message could not be routed due to an exception other than WebClientResponseException, WebClientRequestException, or TimeoutException encountered at the Worker Client while reaching upstream the producer NF. - HTTP2 stream resets on the upstream connection (upstream connect error or disconnect). - DNS resolution failure for producer NF FQDN. - Indicates that the message could not be routed due to an error response received from the platform service mesh. - Indicates that the message could not be routed because eligible producer NFs were proactively filtered due to circuit breaking, outlier detection, egress rate limiting, and so on.
508 Loop Detected	-	Indicates that the message could not be routed due to the presence of the SCP's self FQDN in the incoming SBI request's Via header. It also suggests that required headers or information, such as target-apiproxy, binding headers, discovery headers, or any other necessary routing information, are missing from the request header.
503 Service Unavailable	NF_CONGESTION	Indicates that SCP is overloaded or congested.