

Oracle® Communications

Network Analytics Automated Testing Suite

Guide



Release 23.2.0
F80269-01
June 2023

ORACLE®

Copyright © 2023, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1 Introduction

1.1	Overview	1
1.2	Deployment Model	1
1.3	References	2

2 ATS Framework Features

2.1	Application Log Collection	1
2.2	ATS API	4
2.3	ATS Health Check	4
2.4	ATS Jenkins Job Queue	9
2.5	ATS Maintenance Scripts	10
2.6	ATS System Name and Version Display on the ATS GUI	10
2.7	ATS Tagging Support	11
2.8	Custom Folder Implementation	13
2.9	Single Click Job Creation	14
2.10	Managing Final Summary Report, Build Color, and Application Log	14
2.11	Lightweight Performance	21
2.12	Modifying Login Password	22
2.13	Parallel Test Execution	23
2.13.1	Downloading or Viewing Individual Group Logs	24
2.14	Parameterization	27
2.15	PCAP Log Collection	28
2.16	Persistent Volume for 5G ATS	30
2.17	Test Results Analyzer	30
2.18	Support for Test Case Mapping and Count	31

3 Installing ATS for Different Network Analytics Suite Products

3.1	Installing ATS for NWDAF	1
3.1.1	Software Requirements	1
3.1.2	Environment Setup	2
3.1.3	Resource Requirements	3
3.1.4	Downloading the ATS Package	3

3.1.5	Pushing the Images to Customer Docker Registry	4
3.1.6	Configuring ATS	5
3.1.6.1	Creating and Verifying NWDAF Console Namespaces	5
3.1.6.2	Updating values.yaml File	6
3.1.6.3	Deploying NWDAF ATS in the Kubernetes Cluster	6
3.1.6.4	Verifying ATS Deployment	7
3.2	Installing ATS for OCNADD	8
3.2.1	Resource Requirements	8
3.2.2	Downloading the ATS Package	10
3.2.3	Pushing the Images to Customer Docker Registry	11
3.2.4	Configuring ATS	13
3.2.4.1	Enabling Static Port	13
3.2.5	Deploying ATS and Stub in Kubernetes Cluster	13
3.2.6	Verifying ATS Deployment	14

4 Running Test Cases Using ATS

4.1	Running NWDAF Test Cases using ATS	1
4.2	Running OCNADD Test Cases using ATS	11
4.2.1	Prerequisites	11
4.2.2	Logging into ATS	11
4.2.3	OCNADD-NewFeatures Pipeline	13

My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

- For Technical issues such as creating a new Service Request (SR), select **1**.
- For Non-technical issues such as registration or assistance with My Oracle Support, select **2**.
- For Hardware, Networking and Solaris Operating System Support, select **3**.

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

Acronyms

The following acronyms are used in the ATS User Guide.

Table Acronyms

Abbreviation	Definition
ATS	Automated Testing Suite
BDD	Behavior Driven Development. It is an agile software development technique that encourages collaboration between developers, QA, and non-technical or business participants in a software project.
CI	Continuous Implementation
CNE	Oracle Communications Cloud Native Core, Cloud Native Environment
OCNADD	Oracle Communications Network Analytics Data Director
OCNWDAF	Oracle Communications Network Data Analytics Function
OL	Oracle Linux is a Linux distribution packaged and freely distributed by Oracle, available partially under the GNU (General Public License) since late 2006. It is compiled from Red Hat Enterprise Linux source code, replacing Red Hat branding with Oracle's.

What's New in This Guide

This section introduces the documentation updates for Release 23.2.x in *Oracle Communications Network Analytics Automated Testing Suite Guide*.

Release 23.2.0 - F80269-01, June 2023

OCNADD Release 23.2.0

- Updated the following sections:
 - [Resource Requirements](#)
 - [Downloading the ATS Package](#)
 - [Pushing the Images to Customer Docker Registry](#)
 - [Logging into ATS](#)
 - [Enabling Static Port](#)
 - [Deploying ATS and Stub in Kubernetes Cluster](#)
 - [OCNADD-NewFeatures Pipeline](#)

OCNWDAF Release 23.2.0

Updated the following sections:

- [Software Requirements](#)
- [Resource Requirements](#)
- [Environment Setup](#)
- [Downloading the ATS Package](#)
- [Pushing the Images to Customer Docker Registry](#)
- Added this section: [Updating values.yaml File](#)
- [Deploying NWDAF ATS in the Kubernetes Cluster](#)
- [Verifying ATS Deployment](#)
- [Running NWDAF Test Cases using ATS](#)

1

Introduction

This document provides information about Automated Testing Suite (ATS) deployment model for the Network Analytics Suite products.

ATS allows you to run software test cases using an automated testing tool and then, compares the actual results with the expected or predicted results.

1.1 Overview

Through Automated Testing Suite (ATS), Oracle Communications provides an end-to-end solution to its customers for deploying and testing its Network Analytics Suite products.

This document describes the implementation of ATS for the following products:

- Network Data Analytics Function (OCNWDAF)
- Network Analytics Data Director (OCNADD)

ATS for Network Analytics Suite

For Network Analytics Suite NFs (Network Functions), ATS is built using Oracle Linux 8-slim as the base image. Jenkins is a part of the ATS image and it provides a GUI interface to the users to test either a single NF or multiple NFs independently in the same environment.


Along with the NF docker images, users are provided with the ATS image, simulator images, and test cases of the specific NF. All these images and test cases together form a fully automated suite using which users can directly deploy and test. You can combine it with any other Continuous Integration (CI) pipeline with minimal changes, as Network Analytics Suite ATS uses Jenkins as GUI.

Automated Testing Suite (ATS):

- Provides an end-to-end solution to the customers for testing Oracle Communications Network Analytics Suite -NFs. The ATS package includes:
 - Test scripts and docker images of test container. The docker images have complete framework and libraries installed, which are common for all NFs working with Behavior Driven Development (BDD) framework.
 - Docker image of HTTP Server simulator.
 - Helm chart to deploy the ATS (delivered as a tar file).
 - Readme text file (.txt file).
- Enables all the NF teams with basic environment, framework, and a GUI (Jenkins) to run all the functional test cases.

1.2 Deployment Model

According to the In-Cluster deployment model, ATS can coexist in the same cluster where the NFs are deployed. This deployment model is useful for In-Cluster testing.

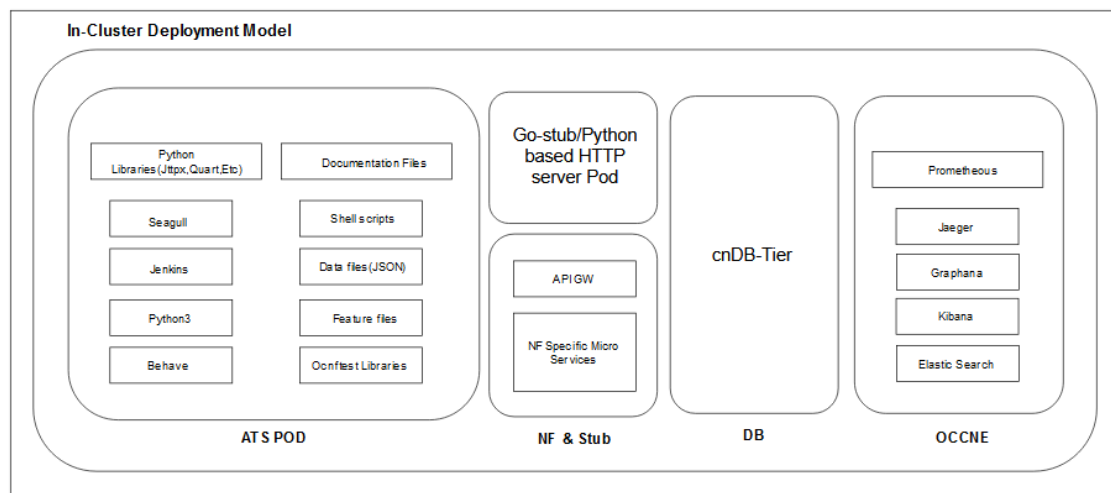Figure 1-1 In-Cluster Deployment Model

1.3 References

For more information about any network function, refer the following documents available on Network Analytics Suite Securesites.

- *Oracle Communications Network Data Analytics Function User Guide*
- *Oracle Communications Network Data Analytics Function Installation and Fault Recovery Guide*
- *Oracle Communications Network Analytics Data Director User Guide*
- *Oracle Communications Network Analytics Data Director Installation, Upgrade, and Fault Recovery Guide*

2

ATS Framework Features

This chapter describes the ATS Framework features:

Table 2-1 ATS Framework Features Compliance Matrix

Features	NWDAF	OCNADD
Application Log Collection	Yes	No
ATS API	No	No
ATS Health Check	No	No
ATS Jenkins Job Queue	Yes	Yes
ATS Maintenance Scripts	Yes	Yes
ATS System Name and Version Display on Jenkins GUI	Yes	Yes
ATS Tagging Support	No	No
Custom Folder Implementation	Yes	No
Single Click Job Creation	Yes	Yes
Final Summary Report, Build Color, and Application Log	Yes	Partially compliant (Application Log is not supported.)
Lightweight Performance	Yes	No
Modifying Login Password	No	Yes
Parallel Test Execution	No	No
Parameterization	Yes	No
PCAP Log Collection	No	No
Persistent Volume	No	Optional
Test Result Analyzer	Yes	Yes
Test Case mapping and Count	Yes	No

2.1 Application Log Collection

Using Application Log Collection, you can debug a failed test case by collecting the application logs for NF System Under Test (SUT). Application logs are collected for the duration that the failed test case was run.

Application Log Collection can be implemented by using ElasticSearch or Kubernetes Logs. In both these implementations, logs are collected per scenario for the failed scenarios.


Application Log Collection Using ElasticSearch

To access the option to collect logs using ElasticSearch:

1. Log in to ATS using respective <NF> login credentials.
2. On the NF home page, click any new feature or regression pipeline, from where you want to collect the logs.
3. In the left navigation pane, click **Build with Parameters**.

4. Select YES or NO from the drop-down menu of **Fetch_Log_Upon_Failure** to select whether the log collection is required for a particular run.
5. If option **Log_Type** is also available, select value **AppLog** for it.

Figure 2-1 Log Levels

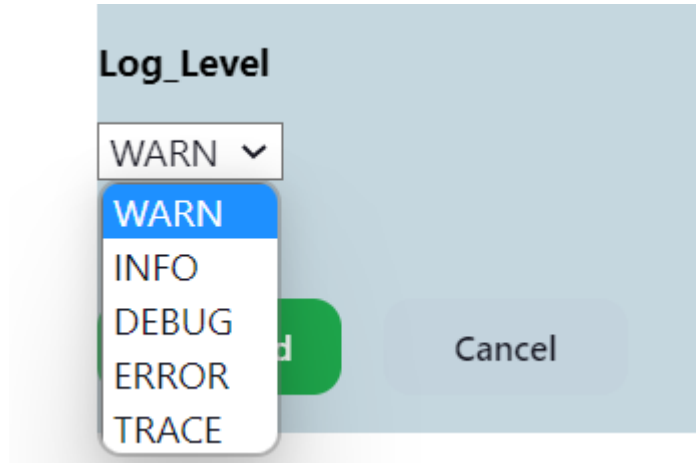

6. Select the Log Level from the drop-down menu of Log_Level to set the log level for all the microservices. The possible values for Log_Level are as follows:
 - **WARN:** Designates potentially harmful situations.
 - **INFO:** Designates informational messages that highlight the progress of the application at coarse-grained level.
 - **DEBUG:** Designates fine-grained informational events that are most useful to debug an application.
 - **ERROR:** Designates error events that might still allow the application to continue running.
 - **TRACE:** The TRACE log level captures all the details about the behavior of the application. It is mostly diagnostic and is more granular and finer than DEBUG log level.

Note

Log_Level values are NF dependent.

7. After the build execution is complete, go into the ATS pod, then navigate to following path to find the applogs: `.jenkins/jobs/<Pipeline Name>/builds/<build number>/` For example, `.jenkins/jobs/SCP-Regression/builds/5/`

Applogs is present in zip form. Unzip it to get the log files.

The following tasks are carried out in the background to collect logs:

- ElasticSearch API is used to access and fetch logs.
- Logs are fetched from ElasticSearch for the failed scenarios
- Hooks (after scenario) within the cleanup file initiate an API call to Elasticsearch to fetch Application logs.

- Duration of the failed scenario is calculated based on the time stamp and passed as a parameter to fetch the logs from ElasticSearch.
- Filtered query is used to fetch the records based on Pod name, Service name, and timestamp (Failed Scenario Duration).
- For ElasticSearch, there is no rollover or rotation of logs over time.
- The maximum records that the ElasticSearch API can fetch per microservice in a failed scenario is limited to 10K.
- The following configuration parameters are used for collecting logs using Elastic Search:
 - ELK_WAIT_TIME: Wait time to connect to Elastic Search
 - ELK_HOST: Elastic Search HostName
 - ELK_PORT: Elastic Search Port

Application Log Collection Using Kubernetes Logs

To access the option to collect logs using Kubernetes Logs:

1. On the NF home page, click any new feature or regression pipeline, from where you want to collect the logs.
2. In the left navigation pane, click **Build with Parameters**.
3. Select YES or NO from the drop-down menu of **Fetch_Log_Upon_Failure** to select whether the log collection is required for a particular run.
4. Select the Log Level from the drop-down menu of Log_Level to set the log level for all the microservices. The possible values for Log_Level are as follows:
 - WARN: Designates potentially harmful situations.
 - INFO: Designates informational messages that highlight the progress of the application at coarse-grained level.
 - DEBUG: Designates fine-grained informational events that are most useful to debug an application.
 - ERROR: Designates error events that might still allow the application to continue running.

Note

Log_Level values are NF dependent.

The following tasks are carried out in the background to collect logs:

- Kube API is used to access and fetch logs.
- For failed scenarios, logs are directly fetched from microservices.
- Hooks (after scenario) within the cleanup file initiate an API call to Elasticsearch to fetch Application logs.
- The duration of the failed scenario is calculated based on the time stamp and passed as a parameter to fetch the logs from microservices.
- Logs roll can occur while fetching the logs for a failed scenario. The maximum loss of logs is confined to a single scenario.

2.2 ATS API

The Application Programming Interface (API) feature provides APIs to perform routine ATS tasks as follows:

- **Start:** To initiate one of the three test suites, such as Regression, New Features, or Performance.
- **Monitor:** To obtain the progress of a test suite's execution.
- **Stop:** To cancel an active test suite.
- **Get Artifacts:** To retrieve the JUNIT format XML test result files for a completed test suite.

For more information about configuring the tasks, see [#unique_53](#).

2.3 ATS Health Check

ATS Health Check functionality is to check the health of the System Under Test (SUT)

Earlier, ATS used Helm test functionality to check the health of the System Under Test (SUT). With the implementation of the ATS Health Check pipeline, the SUT health check process has been automated. ATS health checks can be performed on webscale and non-webscale environments.

Deploying ATS Health Check in a Webscale Environment

- Set the Webscale to 'true' and the following parameters by encoding them with base64 in the ATS values.yaml file:
- Set the following parameter to encrypted data:

```
webscalejumpserverip: encrypted-data
webscalejumpserverusername: encrypted-data
webscalejumpserverpassword: encrypted-data
webscaleprojectname: encrypted-data
webscalelabserverFQDN: encrypted-data
webscalelabserverport: encrypted-data
webscalelabserverusername: encrypted-data
webscalelabserverpassword: encrypted-data
```

Encrypted data is the value of parameters encrypted in base64. Fundamentally, Base64 is used to encode the parameters.

For example:

```
webscalejumpserverip=$(echo -n '10.75.217.42' | base64), Where Webscale Jump
server ip needs to be provided
webscalejumpserverusername=$(echo -n 'cloud-user' | base64), Where Webscale
Jump server Username needs to be provided
webscalejumpserverpassword=$(echo -n '*****' | base64), Where Webscale Jump
server Password needs to be provided
webscaleprojectname=$(echo -n '*****' | base64), Where Webscale Project Name
needs to be provided
webscalelabserverFQDN=$(echo -n '*****' | base64), Where Webscale Lab Server
FQDN needs to be provided
webscalelabserverport=$(echo -n '*****' | base64), Where Webscale Lab Server
Portneeds to be provided
```

```
webscalelabserverusername=$(echo -n '****' | base64), Where Webscale Lab
Server Username needs to be provided
webscalelabserverpassword=$(echo -n '****' | base64), Where Webscale Lab
Server Password needs to be provided
```

Running ATS Health Check Pipeline in a Webscale Environment


To run ATS Health Check pipeline:

1. Log in to ATS using respective <NF> login credentials.
2. Click <NF>HealthCheck pipeline and then click **Configure**.

Note

<NF> denotes the network function. For example, in Policy, it is called as Policy-HealthCheck pipeline.

Figure 2-2 Configure Healthcheck

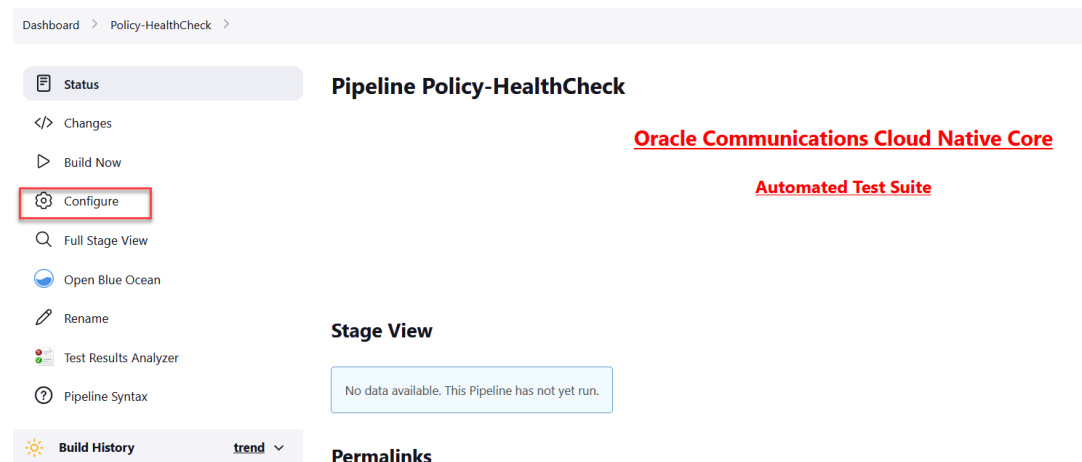

3. Provide parameter a with Helm release name deployed. If there are multiple releases, use comma to provide all Helm release names.

```
//a = helm releases [Provide Release Name with Comma Separated if more
than 1 ]
```

Provide parameter c with the appropriate Helm command, such as helm, helm3, or helm2.

```
//c = helm command name [helm or helm2 or helm3]
```

Figure 2-3 Save the Changes

Pipeline script

Script ?

```
1 node{
2   def myVar = 'initial_value'
3   def buildVar = 'initial_value'
4   properties(
5     [
6       parameters(
7         [string(defaultValue: '', name: 'Helm_releases',description: "Provide Rel
8           string(defaultValue: '', name: 'Namespace', description: "Provide the nan
9         )
10      ]
11    )
12  )
13  stage('Helm-Test-Init') {
14    catchError(buildResult: 'SUCCESS', stageResult: 'UNSTABLE') {
15
16      //a = helm releases [Provide Release Name with Comma Seperated if more than 1 ]
17      //b= Namespace, If not applicable then remove the argument
18      //c= helm command name [helm or helm2 or helm3]
```


☒ Use Groovy Sandbox ?

[Pipeline Syntax](#)

Save

Apply

4. Save the changes and click **Build Now**. ATS runs the health check on respective network function.

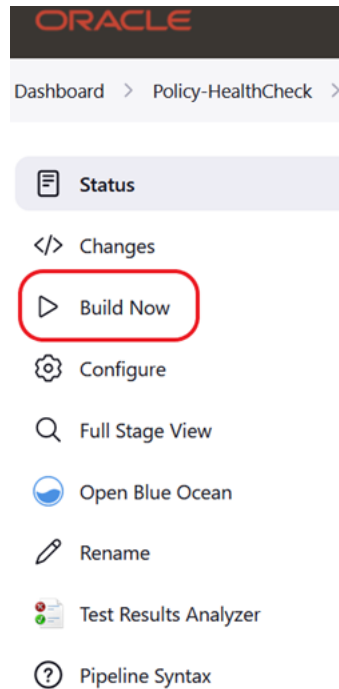Figure 2-4 Build Now

Deploying ATS Health Check in a Non-Webscale Environment

Perform the following procedure to deploy ATS Health Check in a non-webscale environment such as OCCNE:

Set the Webscale parameter set to 'false' and following parameters by encoding it with base64 in the ATS values.yaml file:

```
occnehostip: encrypted-data
occnehostusername: encrypted-data
occnehostpassword: encrypted-data
```

Example:

```
occnehostip=$(echo -n '10.75.217.42' | base64) , Where occne host ip needs to
be provided
occnehostusername=$(echo -n 'cloud-user' | base64), Where occne host username
needs to be provided
occnehostpassword=$(echo -n '*****' | base64), Where password of host needs to
be provided
```

Running ATS Health Check Pipeline in a Non-Webscale Environment

Perform the following procedure to run the ATS Health Check pipeline in a non-webscale environment such as OCCNE:

1. Log in to ATS using respective <NF> login credentials.
2. Click <NF>HealthCheck pipeline and then click **Configure**.
3. Provide parameter a with Helm release name deployed. If there are multiple releases, use comma to provide all Helm release names.

Provide parameter b with SUT deployed namespace name.

Provide parameter c with the appropriate Helm command, such as helm, helm3, or helm2.

```
//a = helm releases [Provide Release Name with Comma Separated if more
than 1 ]
//b = Namespace, If not applicable to WEBSCALE environment then remove the
argument
//c = helm command name [helm or helm2 or helm3]
```

Figure 2-5 Save the Changes

Pipeline script

Script
?

```

1 node{
2     def myVar = 'initial_value'
3     def buildVar = 'initial_value'
4     properties(
5         [
6             parameters(
7                 [string(defaultValue: '', name: 'Helm_releases',description: "Provide Re]
8                 string(defaultValue: '', name: 'Namespace', description: "Provide the nan
9             )
10        ]
11    )
12    stage('Helm-Test-Init') {
13        catchError(buildResult: 'SUCCESS', stageResult: 'UNSTABLE') {
14
15            //a = helm releases [Provide Release Name with Comma Separated if more than 1 ]
16            //b= Namespace, If not applicable then remove the argument
17            //c= helm command name [helm or helm2 or helm3]
```


☒ Use Groovy Sandbox ?

[Pipeline Syntax](#)

Save

Apply

4. Save the changes and click **Build Now**. ATS runs the health check on respective network function.

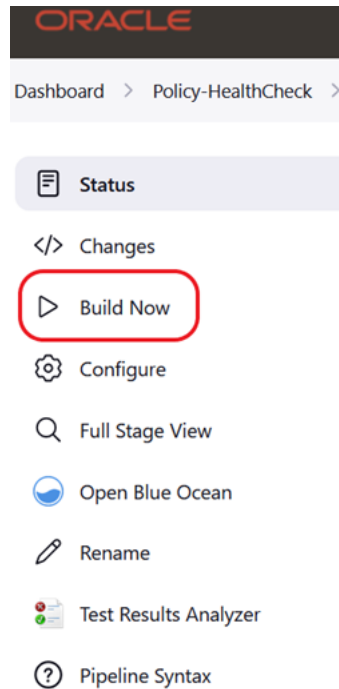
Figure 2-6 Build Now

By clicking **Build Now**, you can run the health check on ATS and store the result in the console logs.

2.4 ATS Jenkins Job Queue

The ATS Jenkins Job Queue feature places the second job in a queue if the current job is already running from the same or different pipelines to prevent jobs from running in parallel to one another.

Job/build queue status can be viewed in the left navigation pane on the ATS home page. The following image shows the build queue status when a user has tried to run the NewFeatures pipeline when the Regression pipeline is already running.

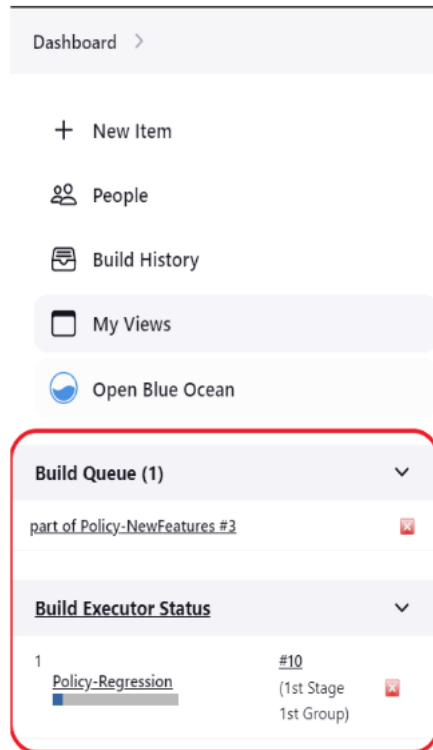Figure 2-7 Build Executor Status

2.5 ATS Maintenance Scripts

ATS maintenance scripts are used to perform the following operations:

- Taking a backup of the ATS custom folders and Jenkins pipeline.
- Viewing the configuration and restoring the Jenkins pipeline.
- Viewing the configuration and installing or uninstalling ATS and stubs.

ATS maintenance scripts are present in the ATS image at the following path: `/var/lib/jenkins/ocats_maint_scripts`

Run the following command to copy the scripts to a local system (bastion):

```
kubectl cp <NAMESPACE>/<POD_NAME>:/var/lib/jenkins/ocats_maint_scripts
<DESTINATION_PATH_ON_BASTION> pod
```

For example,

```
kubectl cp ocpcf/ocats-ocats-policy-694c589664-js267:/var/lib/Jenkins/
ocats_maint_scripts /home/meta-user/ocats_maint_scripts pod
```

2.6 ATS System Name and Version Display on the ATS GUI

This feature displays the ATS system name and version on the ATS GUI.

You can log in to the ATS application using the login credentials to view the following:

- ATS system name: Abbreviated product name followed by NF name.
- ATS Version: Release version of ATS.

Figure 2-8 ATS System Name and Version

2.7 ATS Tagging Support

The ATS Tagging Support feature assists in running the feature files after filtering features and scenarios based on tags. Instead of manually navigating through several feature files, the user can save time by using this feature.

The GUI offers the following four options for selecting tag types:

- **Feature_Include_Tags:** The features that contain either of the tags available in the **Feature_Include_Tags** field are considered for tagging.
 - For example, "cne-common", "config-server". All the features that have either "cne-common" or "config-server" tags are taken into consideration.
- **Feature_Exclude_Tags:** The features that contain neither of the tags available in the **Feature_Exclude_Tags** field are considered for tagging.
 - For example, "cne-common", "config-server". All the features that have neither "cne-common" nor "config-server" as tags are taken into consideration.
- **Scenario_Include_Tags:** The scenarios that contain either of the tags available in the **Scenario_Include_Tags** field are considered.
 - For example, "sanity", "cleanup". The scenarios that have either "sanity" or "cleanup" tags are taken into consideration.
- **Scenario_Exclude_Tags:** The features that contain neither of the tags available in the **Scenario_Exclude_Tags** field are considered.
 - For example, "sanity", "cleanup". The scenarios that have neither "sanity" nor "cleanup" as tags are taken into consideration.

Filter with Tags

The procedure to filter feature files and scenarios based on tags are as follows:

1. On the NF home page, click any new feature or regression pipeline, where you want to use this feature.
2. In the left navigation pane, click **Build with Parameters**. The following image appears.

Figure 2-9 Filter with Tags

3. Select **Yes** under **FilterWithTags**. The result shows four input fields.

Figure 2-10 Types of Tags

The default value of **FilterWithTags** field is "No".

4. The input fields serve as a search or filter, displaying all tags that match the prefix entered. You can select one or multiple tags.

Figure 2-11 Tags Matching with Entered Prefix

5. Select the required tags from the different tags list and click **Submit**.

The specified feature-level tags are used to filter out features that contain any one of the include tags and none of the exclude tags. Here, any or both the fields may be left empty. All features are automatically taken into consideration when both fields are empty.

The scenario level tags are used to filter out the scenarios from the features filtered above. Only scenarios with any of the include tags and none of the exclude tags are considered. Any or both fields can be empty. When both fields are empty, all the scenarios from the above filtered feature files are considered.

Note


- If you select the Select_Option as 'All', all the displayed features and scenarios will run.
- If you select the Select_Option as 'Single/MultipleFeatures', it enables you to select some features, and only those features and respective scenarios are going to run.

2.8 Custom Folder Implementation

The Custom Folder Implementation feature allows the user to update, add, or delete test cases without affecting the original product test cases in the new features, regression, and performance folders. The implemented custom folders are cust_newfeatures, cust_regression, and cust_performance. The custom folders contain the newly created, customised test cases.

Initially, the product test case folders and custom test case folders will have the same set of test cases. The user can perform customization in the custom test case folders, and ATS always runs the test cases from the custom test case folders. If the option "Configuration_Type" is present on the GUI, the user needs to set its value to "Custom_Config" to populate test cases from the custom test case folders.

Figure 2-12 Custom Config Folder

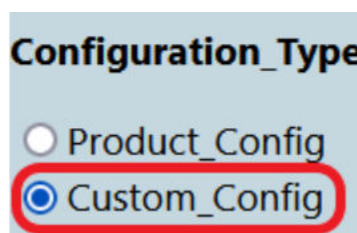


Summary of Custom Folder Implementation

- Separate folders such as cust_newfeatures, cust_regression, and cust_performance are created to hold the custom cases.
- The prepackaged test cases are available in the newfeature and regression Folder.
- The user copies the required test cases to the cust_newfeatures and cust_regression folders, respectively.
- Jenkins always points to the cust_newfeatures and cust_regression folders to populate them in the menu.

If someone initially launches ATS, they will not see any test cases in the menu if the cust folders are not populated. To avoid this, it is recommended to prepopulate both the folders, cust and original, and ask the user to modify only the cust folder if needed.

Figure 2-13 Summary of Custom Folder Implementation

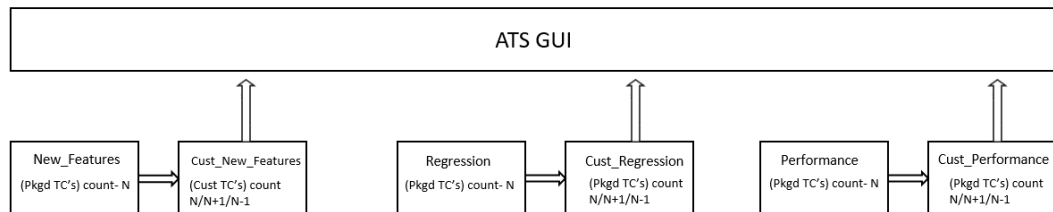

2.9 Single Click Job Creation

With the help of Single Click Job Creation feature, ATS users can easily create a job to run TestSuite with a single click.

2.10 Managing Final Summary Report, Build Color, and Application Log

This feature displays an overall execution summary, such as the total run count, pass count, and fail count.

Supports Implementation of Total-Features

ATS supports implementation of **Total-Features** in the final summary report. Based on the rerun value set, the **Final Result** section in the final summary report displays the Total-Features output.

- If rerun is set to 0, the test result report shows the following result:

Figure 2-14 Total-Features = 1, and Rerun = 0

```

+ rerun=0
+ sh report.sh 0

Final Result:-
Total-Features RUN 1, PASS 1, FAIL 0
  
```

- If rerun is set to non-zero, the test result report shows the following result:

Figure 2-15 Total-Features = 1, and Rerun = 2

```

+ rerun=2
+ sh report.sh 2
Initial Run :-
Features RUN 1, PASS 0, FAIL 1

1st Rerun:-
Features RUN 1, PASS 0, FAIL 1

2nd Rerun:-
Features RUN 1, PASS 0, FAIL 1

Final Result:-
Total-Features RUN 1, PASS 0, FAIL 1

```

Changes After Parallel Test Execution Framework Feature Integration

After incorporating the Parallel Test Execution feature, the following results were obtained:

Final Summary Report Implementations**Figure 2-16 Group Wise Results**

```

*****Stage: stage1 Group: group3 Result*****
Initial Run :-
Features RUN 1, PASS 0, FAIL 1

1st Rerun:-
Features RUN 1, PASS 0, FAIL 1

2nd Rerun:-
Features RUN 1, PASS 0, FAIL 1

stage1 group3
Final Result:-
Total-Features RUN 1, PASS 0, FAIL 1

```

Figure 2-17 Overall Result When Selected Feature Tests Pass

```

*****Overall Result*****

Took 0h0m50s

Final Result:-
Total-Features RUN 1, PASS 1, FAIL 0

```

Figure 2-18 Overall Result When Any of the Selected Feature Tests Fail

```

*****Overall Result*****
Failing scenarios:
Stage:stage1 Group:group3
  SCP_Registration_With_PLMNList.feature:45  Static configuration to NRF for all nfType

Took 0h1m59s

Initial Run:-
Features RUN 1, PASS 0, FAIL 1

1st Rerun:-
Features RUN 1, PASS 0, FAIL 1

2nd Rerun:-
Features RUN 1, PASS 0, FAIL 1

Final Result:-
Total-Features RUN 1, PASS 0, FAIL 1

```

Implementing Build Colors

ATS supports implementation of build color. The details are as follows:

Table 2-2 Build Color Details

Rerun Values	Rerun set to zero		Rerun set to non-zero		
Status of Run	All Passed in Initial Run	Some Failed in Initial Run	All Passed in Initial Run	Some Passed in Initial Run, Rest Passed in Rerun	Some Passed in Initial Run, Some Failed Even After Rerun
Build Status	SUCCESS	FAILURE	SUCCESS	SUCCESS	FAILURE
Pipeline Color	GREEN	Execution Stage where test cases failed shows YELLOW color, rest of the successful stages are GREEN.	GREEN	GREEN	Execution Stage where test cases failed shows YELLOW color, rest of the successful stages are GREEN
Status Color	BLUE	RED	BLUE	BLUE	RED

Changes After Integrating Parallel Test Execution Framework Feature

In sequential execution, the build color or overall pipeline status of any run was mainly dependent on the following parameters:

- the rerun count and the pass or fail status of test cases in the initial run
- the rerun count and the pass or fail status of test cases in the final run

For the parallel test case execution, the pipeline status also depends on another parameter, "Fetch_Log_Upon_Failure," which is given in the **build with parameters** page. If the parameter Fetch_Log_Upon_Failure is not there, its default value is considered "NO".

Table 2-3 Pipeline Status When Fetch_Log_Upon_Failure = NO

Rerun Values	Rerun set to zero		Rerun set to non-zero		
Passed/Failed	All Passed in Initial Run	Some Failed in Initial Run	All Passed in Initial Run	Some Passed in Initial Run, Rest Passed in Rerun	Some Passed in Initial Run, Some Failed Even After Rerun
Status	SUCCESS	FAILURE	SUCCESS	SUCCESS	FAILURE


Table 2-4 Pipeline Status When Fetch_Log_Upon_Failure = YES

Rerun Values	Rerun set to zero			Rerun set to non-zero		
Passed/Failed	All Passed in Initial Run	Some Failed in Initial Run and Failed in Rerun	Some Failed in Initial Run and Passed in Rerun	All Passed in Initial Run	Some Passed in Initial Run, Rest Passed in Rerun	Some Passed in Initial Run, Some Failed Even After Rerun
Status	SUCCESS	FAILURE	SUCCESS	SUCCESS	SUCCESS	FAILURE

Some common combinations of these parameters, such as rerun_count, Fetch_Log_Upon_Failure, and pass/fail status of test cases in initial and final run and the corresponding build colors are as follows:


- When Fetch_Log_Upon_Failure is set to YES and rerun_count is set to 0, test cases pass in the initial run. The pipeline will be green, and its status will show as blue.

Figure 2-19 Fetch_Log_Upon_Failure is set to YES and rerun_count is set to 0, test cases pass

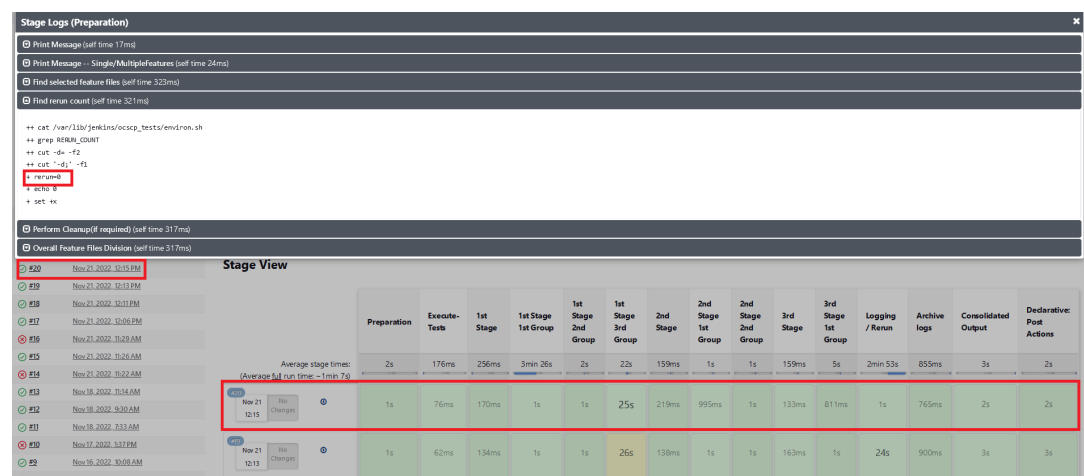


- When Fetch_Log_Upon_Failure is set to YES and rerun_count is set to 0, test cases fail on the initial run but pass during the rerun. The initial execution stage is yellow and all subsequent successful stages will be green, and the status will be blue.

Figure 2-20 Test Cases Fail on the Initial Run but Pass in the Rerun

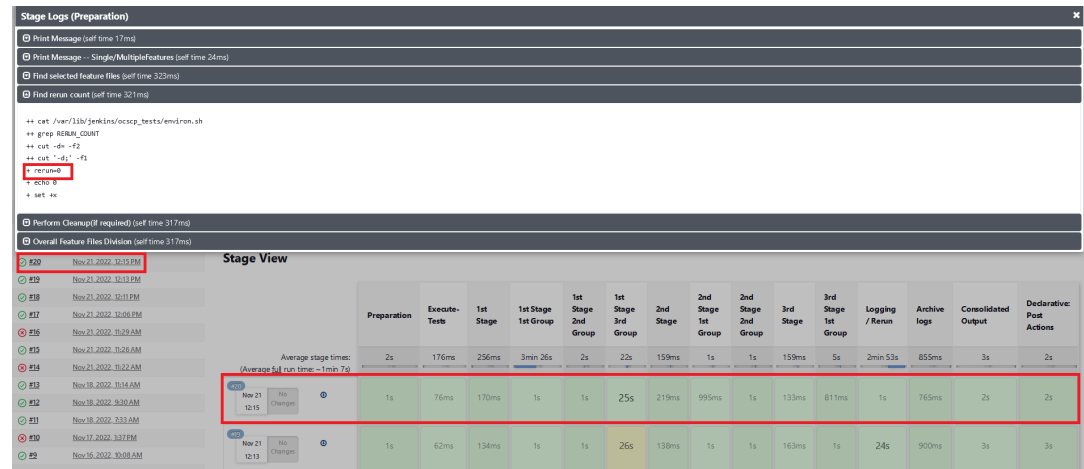


- When Fetch_Log_Upon_Failure is set to YES and rerun_count is set to 0, test cases fail in both the initial and the rerun. Execution stages will show as yellow, all other successful stages will be shown as green, and the overall pipeline status will be red.

Figure 2-21 Test Cases Fail in Both the initial and the Rerun

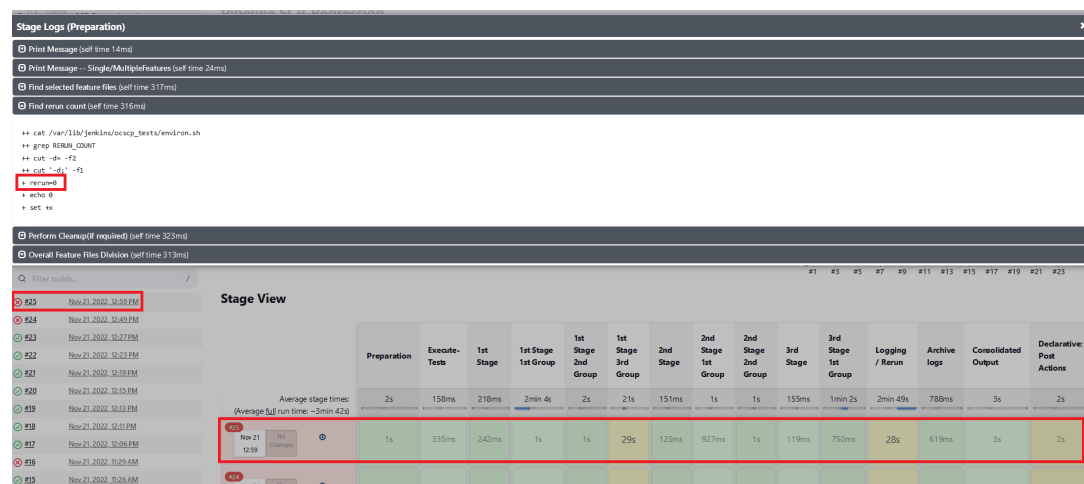

- When Fetch_Log_Upon_Failure is set to YES and the rerun count is set to non-zero. If all of the test cases pass in the first run, no rerun will be initiated because the cases have already been passed. The pipeline will be green, and the status will be indicated in blue.

Figure 2-22 All of the Test cases Pass in the Initial Run

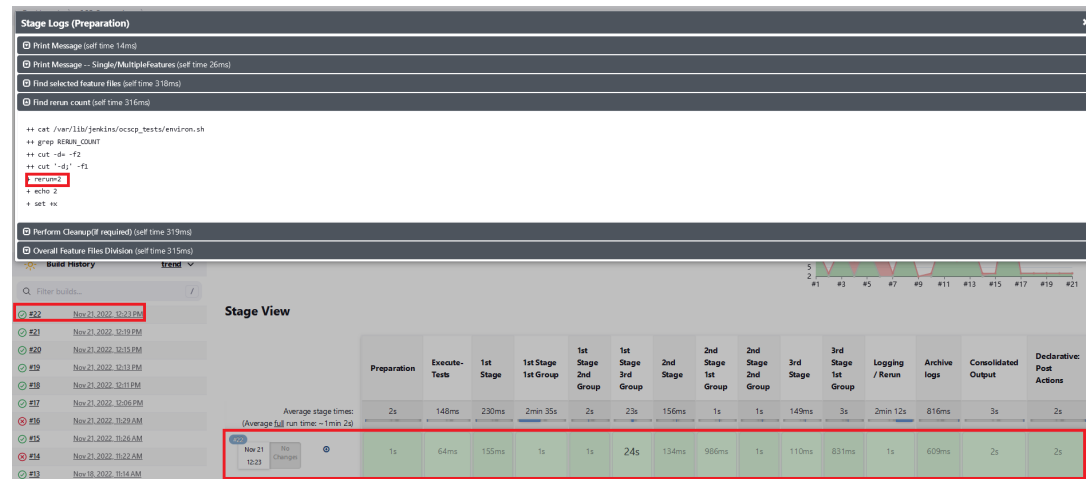


- When Fetch_Log_Upon_Failure is set to YES and the rerun count is set to non-zero. If some of the test cases fail in the initial run and the remaining ones pass in one of the remaining reruns, then the initial test case execution stages will show as yellow, the remaining stages as green, and the overall pipeline status as blue.

Figure 2-23 Test Cases Fail in the Initial Run and the Remaining Ones Pass



- When Fetch_Log_Upon_Failure is set to YES and the rerun count is set to non-zero. If some of the test cases fail in the initial run and the remaining ones fail in all the remaining reruns, the stages of test case execution will be shown in yellow, the remaining stages in green, and the overall pipeline status in red.

Figure 2-24 Test Cases Fail in the Initial and Remaining Reruns

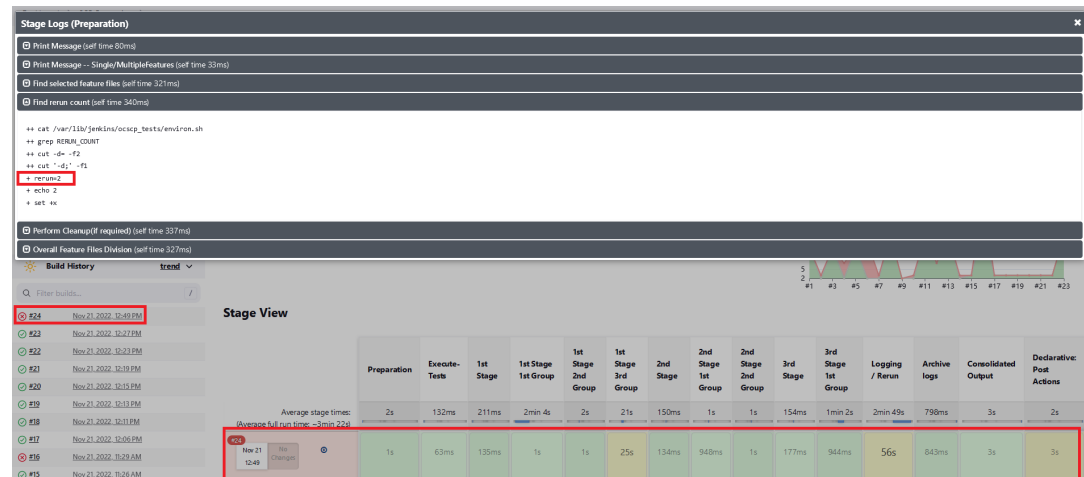

- Whenever any of the multiple Behave processes that are running in the ATS are exited without completion, the stage in which the process exited and the consolidated output stage are shown as yellow, and the overall pipeline status will be yellow. Also in the consolidated output stage, near the respective stage result, the exact run in which the Behave processes exited without completion will be printed.

Figure 2-25 Stage View When Behave Process is Incomplete


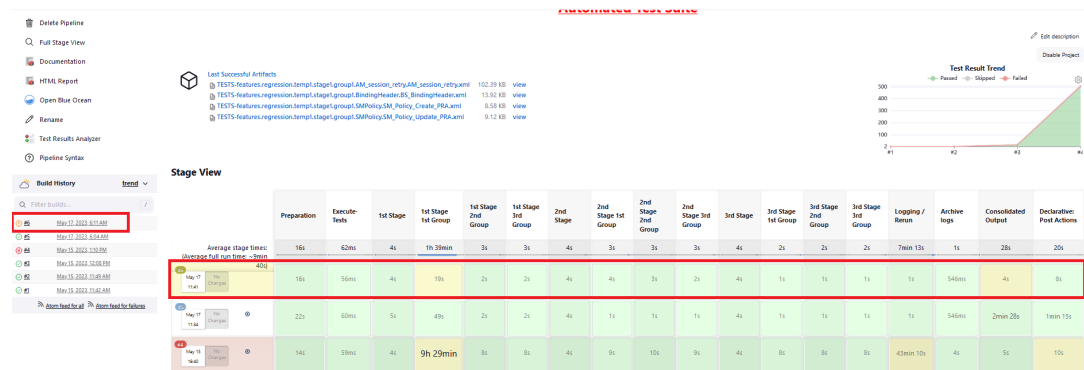


Figure 2-26 Consolidated Report for a Group When a Behave Process was Incomplete

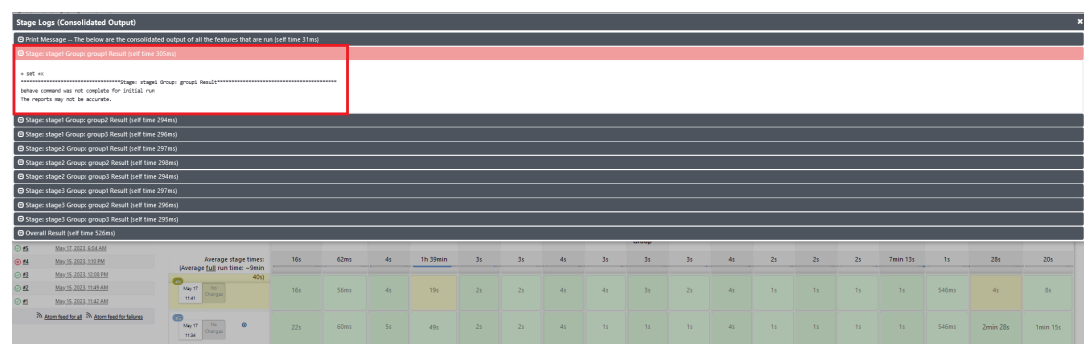

Implementing Application Log

ATS automatically fetches the SUT Debug logs during the rerun cycle if it encounters any failures and saves them in the same location as the build console logs. The logs are fetched for the rerun time duration only using the timestamps. If, for some microservices, there are no log entries in that time duration, it does not capture them. Therefore, the logs are fetched only for the microservices that have an impact or are associated with the failed test cases.

Location of SUT Logs: /var/lib/jenkins/.jenkins/jobs/PARTICULAR-JOB-NAME/builds/BUILD-NUMBER/date-timestamp-BUILD-N.txt

Note

The file name of the SUT log is added as a suffix with the date, timestamp, and build number (for which the logs are fetched). These logs share the same retention period as build console logs, set in the ATS configuration. It is recommended to set the retention period to optimal owing to the Persistent Volume Claim (PVC) storage space availability.

2.11 Lightweight Performance

The Lightweight Performance feature allows you to run performance test cases. In ATS, a new pipeline known as "<NF>-Performance", where NF stands for Network Function, is introduced, for example, SLF-Performance.

Figure 2-27 Sample Screen: UDR Home Page

S	W	Name	Last Success	Last Failure	Last Duration
...	...	SLF-HealthCheck	N/A	N/A	N/A
...	...	SLF-NewFeatures	N/A	N/A	N/A
...	...	SLF-Performance	N/A	N/A	N/A
...	...	SLF-Regression	N/A	N/A	N/A
...	...	UDR-HealthCheck	N/A	N/A	N/A
...	...	UDR-NewFeatures	N/A	N/A	N/A
...	...	UDR-Regression	N/A	N/A	N/A

The <NF>-Performance pipeline verifies from 500 to 1k TPS (Transactions per Second) of traffic using the http-go tool, a tool used to run the traffic on the backend. It also helps to monitor the CPU and memory of microservices while running lightweight traffic.

The duration of the traffic run can be configured on the pipeline.


2.12 Modifying Login Password

You can log in to the ATS application using the default login credentials. The default login credentials are shared for each NF in the respective chapter of this guide.

Perform the following procedure to modify the default password:


1. Log in to the ATS application using the default login credentials. The home page of the respective NF appears with its preconfigured pipelines as follows:

Figure 2-28 Sample Screen: NRF Home Page

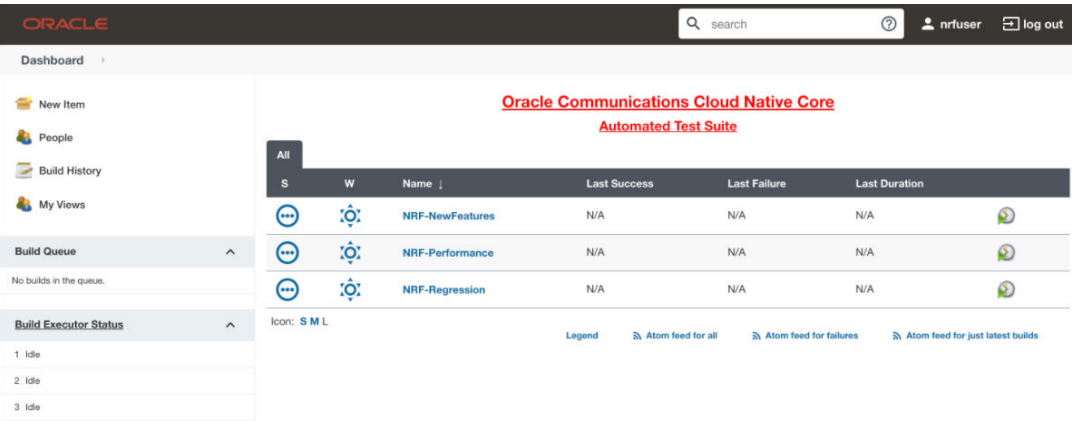

2. Hover over the user name and click the down arrow.
3. Click **Configure**.

Figure 2-29 Configure Option

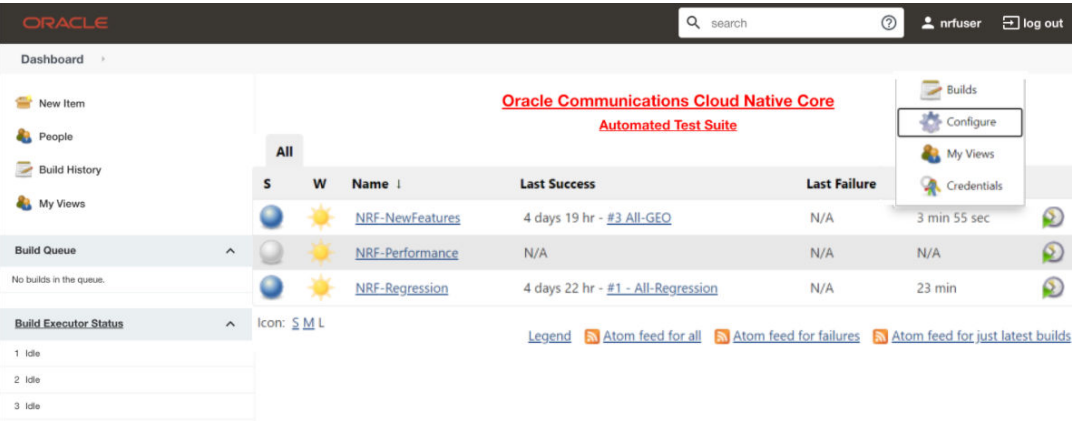

The following page appears:

Figure 2-30 Logged-in User Details

The screenshot shows the Oracle user profile page. The 'Password' section is highlighted with a red box. It contains three input fields: 'Password', 'Confirm Password', and 'Current Password'. Below this section are other fields like 'Full Name', 'Description', 'API Token', 'Credentials', 'E-mail', 'My Views', 'Notification URL', 'SSH Public Keys', 'Session Termination', and 'Settings for search'.

4. In the Password section, enter the new password in the **Password** and **Confirm Password** fields.
5. Click **Save**.
A new password is set for you.

2.13 Parallel Test Execution

Parallel test execution enables you to perform multiple logically grouped tests simultaneously on the same System Under Test (SUT) to reduce the overall execution time of ATS.

ATS currently executes all its tests in a sequential manner, which is time-consuming. With parallel test execution, tests can be run concurrently rather than sequentially or one at a time. Test cases or feature files are now separated into different folders, such as stages and groups, for concurrent test execution. Different stages, such as stage 1, stage 2, and stage 3, run the test cases in a sequential order, and each stage has its own set of groups. Test cases or feature files available in different groups operate in parallel. When all the groups within one stage have completed their execution, then only the next stage will start the execution.

Pipeline Stage View

The pipeline stage view appears as follows:

Figure 2-31 Pipeline Stage View


Stage View

	Preparation	Execute-Tests	1st Stage	1st Stage 1st Group	1st Stage 2nd Group	1st Stage 3rd Group	2nd Stage	2nd Stage 1st Group	2nd Stage 2nd Group	3rd Stage	3rd Stage 1st Group	Logging / Rerun	Archive logs	Consolidated Output	Declarative Post Actions
Average stage times: (Average full run time: ~54s)	5s	59ms	1s	31s	2s	26s	1s	999ms	1s	1s	997ms	33s	487ms	2s	6s
Feb 07 14:10 No Changes	5s	46ms	1s	1s	1s	27s	1s	1s	1s	1s	887ms	2s	580ms	2s	5s

Pipeline Blue Ocean View

Blue Ocean is a Jenkins plugin that gives a better representation of concurrent execution with stages and groups. The pipeline blue ocean view appears as follows:

Figure 2-32 Pipeline Blue Ocean View

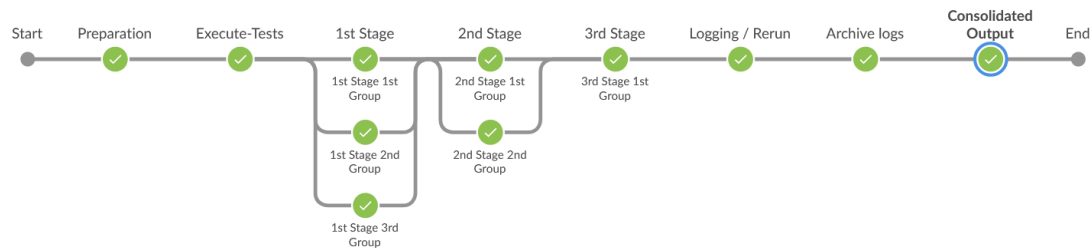

Impact on Other Framework Features

The integration of the parallel test framework feature has an impact on the following framework features. See the sections below for more details:


- [Application Log Collection](#)
- [ATS API](#)
- [Managing Final Summary Report, Build Color, and Application Log](#)
- [PCAP Log Collection](#)

2.13.1 Downloading or Viewing Individual Group Logs

To download individual group logs:


1. On the Jenkins pipeline page, click **Open Blue Ocean** in the left navigation pane.

Figure 2-33 Jenkins Pipeline Page

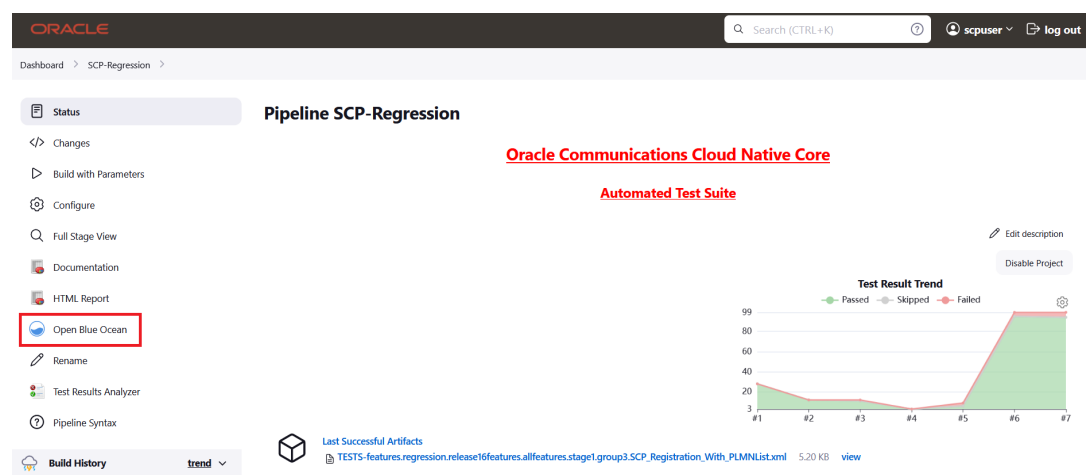

2. Click the desired build row on the Blue Ocean page.


Figure 2-34 Run the Build

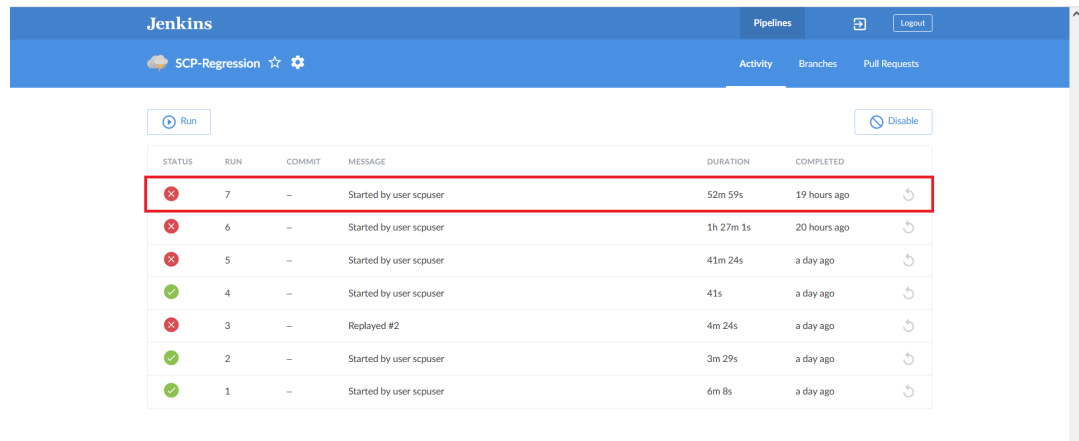

STATUS	RUN	COMMIT	MESSAGE	DURATION	COMPLETED
✖	7	—	Started by user scpuser	52m 59s	19 hours ago
✖	6	—	Started by user scpuser	1h 27m 1s	20 hours ago
✖	5	—	Started by user scpuser	41m 24s	a day ago
✔	4	—	Started by user scpuser	41s	a day ago
✖	3	—	Replayed #2	4m 24s	a day ago
✔	2	—	Started by user scpuser	3m 29s	a day ago
✔	1	—	Started by user scpuser	6m 8s	a day ago


- The selected build appears. The diagram displays the order in which the different stages, or groups, are executed.

Figure 2-35 Stage Execution

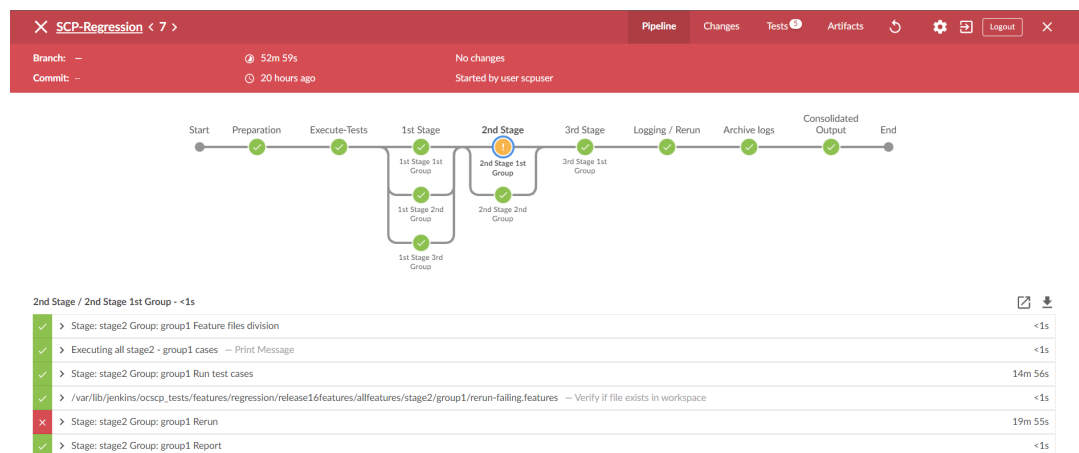


- Click the desired group to download the logs.

Figure 2-36 Executed Groups

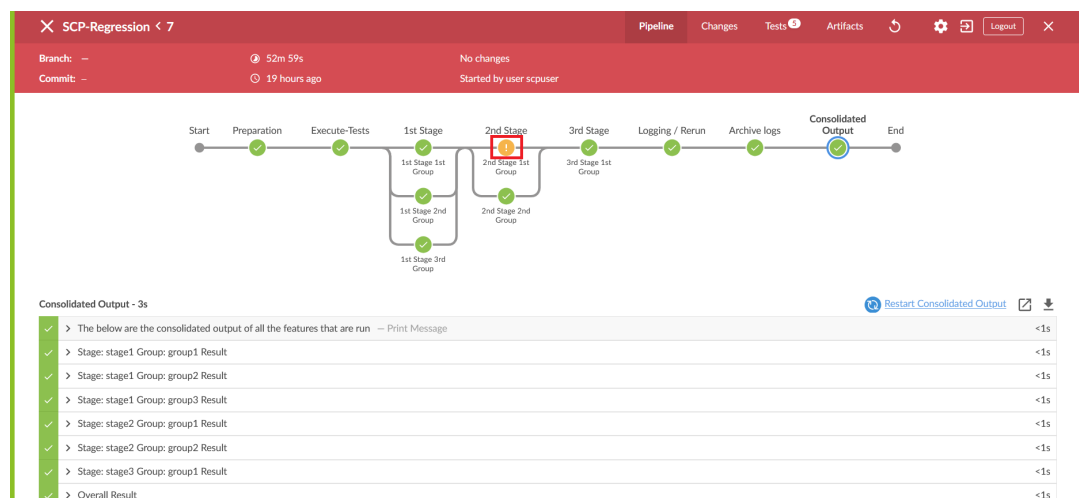


- Click the **Download** icon on the bottom right of the pipeline. The log for the selected group is downloaded to the local system.

Figure 2-37 Download Logs

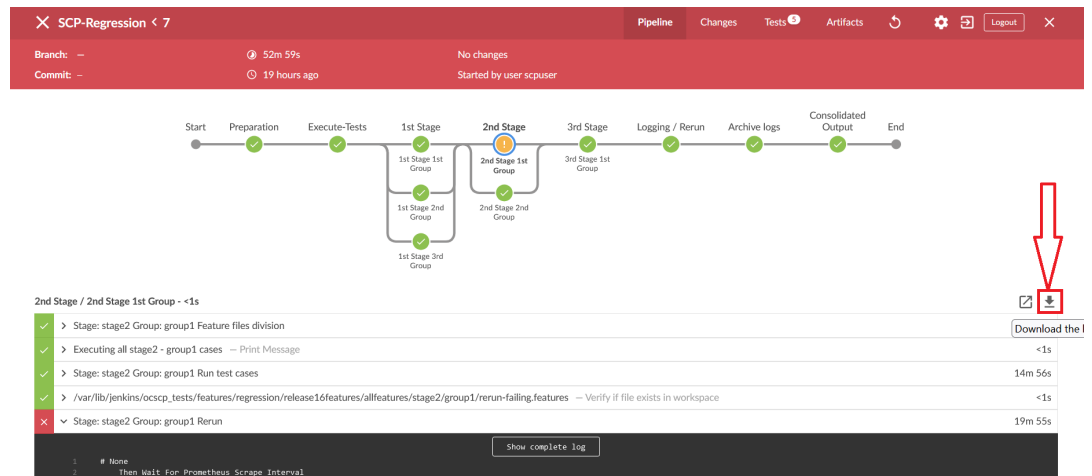

- To view the log, click the **Display Log** icon. The logs are displayed in a new window.

Figure 2-38 Display Logs

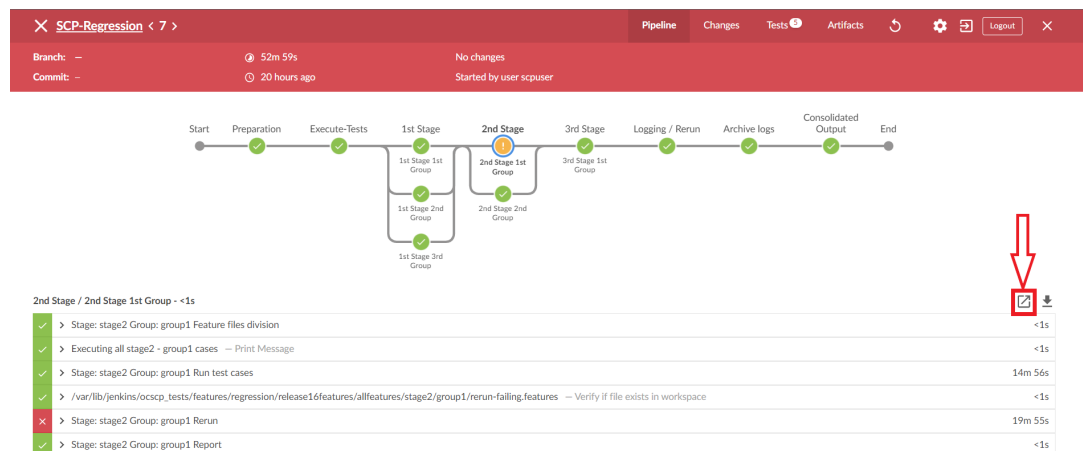

Viewing Individual Group Logs without using Blue Ocean

There are two alternate ways to view individual group logs:

- Using Stage View
 - On the Jenkins pipeline page, hover the cursor over the group in stage view to view the logs.
 - A pop-up with the label "Logs" will appear. Click on it.
 - There will be a new pop-up window. It contains many rows, where each row corresponds to the execution of one Jenkins step.
 - Click on the row labelled **Stage: stage_name>."Group: <group_name> Run test cases** to view the log for this group's execution.

- Click on the row labelled **Stage: stage_name>." "group_name> Rerun** to display the re-run logs.
- Using Pipeline Steps Page
 - On the Jenkins pipeline page, under the **Build History** dropdown, click on the desired build number.
 - Click the **Pipeline Steps** button on the left pane.
 - A table with columns for step, arguments, and status appears.
 - Under the Arguments column, find the label for the desired stage and group.
 - Click on the step with the label **Stage: <stage_name> Group: <group_name> Run test** cases under it or click the **Console output** icon near the status to view the log for this group execution.
 - To see rerun logs, find the step with the label **Stage: <stage_name> Group: <group_name> Rerun** under it.


2.14 Parameterization

This feature allows you to provide or adjust values for the input and output parameters needed for the test cases to be compatible with the SUT configuration. You can update or adjust the key-value pair values in the `global.yaml` and `feature.yaml` files for each of the feature files so that they are compatible with SUT configuration. In addition to the existing custom test case folders (Cust New Features, Cust Regression, and Cust Performance), this feature enables folders to accommodate custom data, default product configuration, and custom configuration. You can maintain multiple versions or copies of the custom data folder to suit varied or custom SUT configurations. With this feature, the ATS GUI has the option to either execute test cases with the default product configuration or with a custom configuration.

This feature enables you to perform the following tasks:

- Define parameters and assign or adjust values to make them compatible with SUT configuration.
- Execute test cases either with default product configurations or custom configurations and multiple custom configurations to match varied SUT configurations.
- Assign or adjust values for input or output parameters through custom or default configuration yaml files (key-value pair files).
- Define or adjust the input or output parameters for each feature file with its corresponding configuration.
- Create and maintain multiple configuration files to match multiple SUT configurations.


Figure 2-39 SUT Design Summary

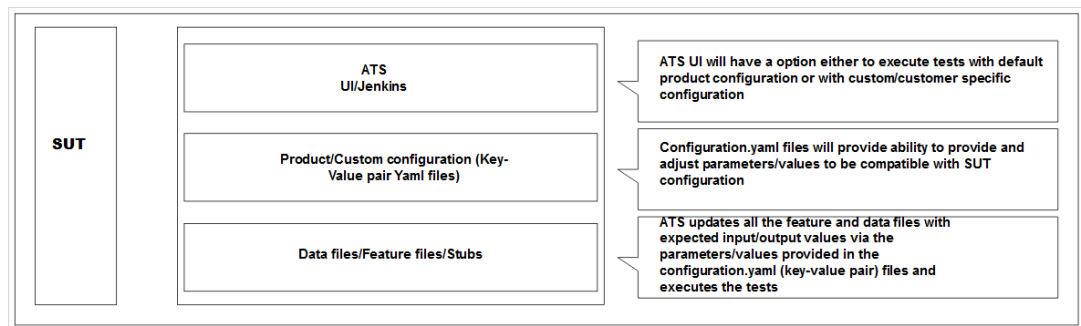

In the folder structure:

- The Product Config folder contains default product configuration files (feature-wise yaml per key-value pair), which are compatible with default product configuration.
- New features, Regression and Performance, Data folder, and Product Config folders are replicated or copied into custom folders and delivered as part of the ATS package in every release.
- You can customize custom folders by:
 - Removing test cases not needed or as appropriate for your use.
 - Adding new test cases as needed or as appropriate for your use.
 - Removing or adding data files in the cust_data folder or as appropriate for your use.
 - Adjusting the parameters or values in the key-value pair per yaml file in the custom config folder for test cases to run or pass with a custom configured SUT.
- The product folders are always intact (unchanged) and you can update the Custom folders
- You can maintain multiple copies of Custom Configurations and bring them to use as needed or as appropriate for the SUT configuration.

Figure 2-40 Folder Structure

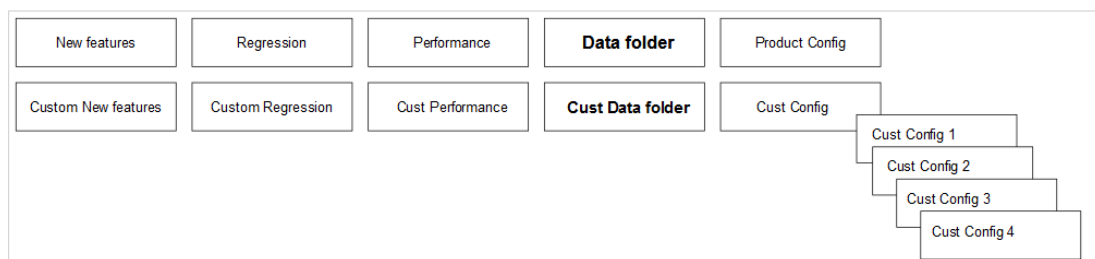

2.15 PCAP Log Collection

PCAP Log Collection allows collecting the NF, SUT, or PCAP logs from the debug tool sidecar container. This feature can be integrated and delivered as a standalone or along with the Application Log Collection feature. For information, see [Application Log Collection](#).

PCAP Log Integration

1. The Debug tool should be enabled on SUT Pods while deploying the NF. The name of the Debug container must be "tools".
For example, in SCP, the debug tool should be enabled for all the SCP microservice pods.
2. Update the following parameters in the values.yaml file, under the resource section, with ATS minimum resource requirements:
 - a. CPU: 3
 - b. memory: 3Gi
3. On the home page, click any new feature or regression pipeline.
4. In the left navigation pane, click **Build with Parameters**.
5. Select YES from the drop-down menu of **Fetch_Log_Upon_Failure**.
6. If option **Log_Type** is available, select value **PcapLog [Debug Container Should be Running]** for it.
7. Select **PcapLog [Debug Container Should be Running]** to activate PCAP Log Collection in ATS-NF.
The following Build with Parameters page appears when only the PCAP logs feature has been integrated.

Figure 2-41 PCAP Logs Selection Option

Oracle Communication Automated Test Suite - UDR

TestSuite	NewFeatures
SUT	UDR-SLF
Select_Option	☒ All ☐ Single/MultipleFeatures
TestCases	• ProvGw_SSL_Enabled • SLF_Nrf_Configurable_Api • SLF_Dns_Srv • SLF_Server_Header
Fetch_Log_Upon_Failure	YES ▼
Build	

8. After the build execution is complete, go into the ATS pod, then navigate to below path to find the pcaplogs: `.jenkins/jobs/<Pipeline Name>/builds/<build number>/`
For example, `.jenkins/jobs/SCP-Regression/builds/5/`

Pcaplogs is present in zip form. Unzip it to get the log files.

The following Build with Parameters page appears when both application and PCAP logs have been integrated.

Figure 2-42 Both Application Logs and PCAP Logs Selection

The screenshot displays a configuration window for log selection. It features two columns of log categories, each with a list of specific log entries. Below the columns are three settings: 'Fetch_Log_Upon_Failure' set to 'YES', 'Log_Type' with checkboxes for 'AppLog' and 'PcapLog' (the latter is disabled with a note), and 'Log_Level' set to 'Not Applicable'. A 'Build' button is located at the bottom left.

Log Category	Log Entry
Dynamic_Policy_Override	Import_Export_Policy_RestAPI
OverrideDefaultPCCRule	Policy_Action_Bulk_Pccrule_Removal
Policy_Table	CHF_Capacity
Multiple_SM_Multiple_UDR	Nf_Notification_CHF_Load_Change
Nf_Notification_CHF_removed	Nf_Notification_UDR_Load_Change
Nf_Notification_UDR_removed	SM_CHF_Priority
SM_CHF_Update_Notify_SLA_PCCRule	SM_CHF_Update_Notify_SLA_SessionRule
SM_Policy_Create_Dynamic_PCCRule	SM_Policy_Create_PRA
SM_Policy_Create_Sess_PCCRule	SM_Policy_Terminate
SM_Policy_Update_Event_Trigger_APP_STA	SM_Policy_Update_Event_Trigger_APP_STO
SM_Policy_Update_Event_Trigger_DEF_QOS_CH	SM_Policy_Update_Event_Trigger_RES_MO_RE
SM_Policy_Update_Event_Trigger_SUCC_RES_ALLO	SM_Policy_Update_Event_Trigger_US_RE
SM_Policy_Update_PRA	SM_UDR_Capacity
SM_UDR_Priority	SM_Update_Ev_Trig_SE_AMBR_CH_and_DEF_QOS_CH
SM_Update_Ev_Trig_SE_AMBR_CH_or_DEF_QOS_CH	SM_Update_Notify_UDR_Data_Changed
SM_Update_Notify_UDR_Data_Changed_Dnn1	SM_Update_Notify_UDR_Data_Delete
SM_Update_Notify_UDR_Subscribe_Remove	UDR_notDiscovered_initially
SM_policy_audit	SessionRetry
Spending_Limit_Pending_Counter	Spending_Limit_Pending_Counter_forSessionRule
Subscriber_Activity_Logging	Subscriber_Activity_Logging_PID
Subscriber_Activity_Logging_PID_ChfTerminate	Subscriber_Activity_Logging_PID_UdrNotify
Variant2	XFCC_Verification

Fetch_Log_Upon_Failure: YES

Log_Type: ☐ AppLog ☐ PcapLog [Debug Container Should be Running]

Log_Level: Not Applicable

Build

2.16 Persistent Volume for 5G ATS

The Persistent Volume (PV) feature allows ATS to retain historical build execution data, test cases, and ATS environment configurations.

ATS Packaging When Using Persistent Volume

- **Without the Persistent Volume option:** ATS package includes an ATS image with test cases.
- **With Persistent Volume option:** ATS package includes the ATS image and test cases separately. The new test cases are provided between the releases. To support both with and without Persistent Volume options, test cases and execution job data are packaged in the ATS image as well as a tar file.

2.17 Test Results Analyzer

The Test Results Analyzer is a plugin available in ATS to view pipeline test results based on XML reports. It provides the test results report in a graphical format, which includes consolidated and detailed stack trace results in case of any failures. It allows you to navigate to each and every test.

The test result report shows any one of the following statuses for each test case:

- **PASSED:** If the test case passes.
- **FAILED:** If the test case fails.
- **SKIPPED:** If the test case is skipped.
- **N/A:** If the test cases are not executed in the current build.

2.18 Support for Test Case Mapping and Count

The Test Case Mapping and Count feature displays the total number of features, test cases, or scenarios and their mapping to each feature in the ATS GUI.

3

Installing ATS for Different Network Analytics Suite Products

This section describes how to install ATS for different Network Analytics Suite products. It includes:

- [Installing ATS for NWDAF](#)
- [Installing ATS for OCNADD](#)

3.1 Installing ATS for NWDAF

This section describes the resource requirements and ATS installation procedures for NWDAF:

- [Software Requirements](#)
- [Environment Setup](#)
- [Resource Requirements](#)
- [Downloading the ATS Package](#)
- [Pushing the Images to Customer Docker Registry](#)
- [Configuring ATS](#)
- [Deploying NWDAF ATS in the Kubernetes Cluster](#)
- [Verifying ATS Deployment](#)
- [Creating and Verifying NWDAF Console Namespaces](#)

3.1.1 Software Requirements

This section describes the software requirements to install ATS for NWDAF. Install the following software bearing the versions mentioned in the table below:

Table 3-1 Software Requirements

Software	Version
Kubernetes	1.20.7, 1.21.7, 1.22.5
Helm	3.1.2, 3.5.0, 3.6.3, 3.8.0
Podman	2.2.1, 3.2.3, 3.3.1

To verify the CNE version, run the following command:

```
echo $OCNE_VERSION
```

To verify the Helm and Kubernetes versions installed in the CNE, run the following commands:

- Verify Kubernetes version:

```
kubectl version
```

- Verify Helm version:

```
helm3 version
```

3.1.2 Environment Setup

This section describes steps to ensure the environment setup facilitates the correct installation of ATS for NWDAF.

Network Access

The Kubernetes cluster hosts must have network access to the following:

- Local docker image repository, where the OCATS NWDAF images are available.
To verify if the Kubernetes cluster hosts have network access to the local docker image repository, retrieve any image with tag name to check connectivity by running the following command:

```
docker pull <docker-repo>/<image-name>:<image-tag>
```

Where, `docker-repo` is the IP address or host name of the repository, `image-name` is the docker image name and `image-tag` is the tag the image used for the NWDAF pod.

- Local helm repository, where the OCATS NWDAF helm charts are available.
To verify if the Kubernetes cluster hosts have network access to the local helm repository, run the following command:

```
helm repo update
```

Client Machine Requirement

Listed below are the Client Machine requirements for a successful ATS installation for NWDAF:

- Network access to the Helm repository and Docker image repository.
- Helm repository must be configured on the client.
- Network access to the Kubernetes cluster.
- The environment settings to run the `kubectl` and `docker` commands. The environment should have privileges to create a namespace in the Kubernetes cluster.
- The Helm client must be installed. The environment should be configured such that the Helm install command deploys the software in the Kubernetes cluster.

cnDBTier Requirement

NWDAF supports cnDBTier in a vCNE environment. cnDBTier must be up and active in case of containerized CNE. For more information see, *Oracle Communications cnDBTier Installation, Upgrade, and Fault Recovery Guide*.

Slice Load and Geographical Data

Load the Slice load and Geographical data for simulation. The `nwdaf_configuration` service database tables should be populated with slice and cell data to allow running the scripts correctly and use this information as test data.

3.1.3 Resource Requirements

This section describes the ATS resource requirements for NWDAF.

NWDAF Pods Resource Requirements Details

This section describes the resource requirements, which are needed to deploy NWDAF ATS successfully. The following table describes the total resource usage for:

- NWDAF Suite
- NWDAF Notification Consumer Simulator

Table 3-2 NWDAF Pods Resource Requirements Details

Microservice	vCPUs Required per Pod	Memory Required per Pod (GB)	Storage PVC Required per Pod (GB)	Replicas (regular deployment)	Replicas (ATS deployment)	CPUs Required - Total	Memory Required - Total (GB)	Storage PVC Required - Total (GB)
ocn-ats-nwdaf-service	4	3	0	1	1	4	4	0
ocn-ats-nwdaf-notify-service	1	2	0	1	1	1	2	0

3.1.4 Downloading the ATS Package

Locating and Downloading ATS Images

To locate and download the ATS Image from MOS:

1. Log in to [My Oracle Support](#) using the appropriate credentials.
2. Select the **Patches & Updates** tab.
3. In the **Patch Search** window, click **Product or Family (Advanced)**.
4. Enter *Oracle Communications Cloud Native Core - 5G* in the **Product** field.
5. Select *Oracle Communications Cloud Native Core Networks Data Analytics Function <release_number>* from the **Release** drop-down.
6. Click **Search**. The **Patch Advanced Search Results** list appears.
7. Select the required ATS patch from the list. The Patch Details window appears.
8. Click **Download**. The File Download window appears.
9. Click the **<p*****_<release_number>_Tekelec>.zip** file to download the NWDAF ATS package file.
10. Extract the release package zip file. The package is named as *nwdaf-pkg-<marketing-release-number>.tgz*. For example, *nwdaf-pkg-23.2.0.0.tgz*.

11. Untar the NWDAF package file to the specific directory, `tar -xvf nwdafe-pkg-<marketing-release-number>.tgz`. The NWDAF directory has the following package structure:

```
# Root
- images
  - tar of images
  - sha 256 of images
- troubleshooting/
  - nfDataCapture.sh
- ocn-nwdafe-helmChart/
  - helmChart
    - templates
    - charts
    - values.yaml
    - charts.yaml
    - nwdafe-pre-installer.tar.gz
  - simulator-helmChart
    - templates
    - charts
    - values.yaml
    - charts.yaml
- nwdafe-ats/
  - ocn-ats-nwdafe-tool
    - ngnix
    - templates
  - ocnwdafe_tests
    - data
    - features
```

3.1.5 Pushing the Images to Customer Docker Registry

Follow the procedure described below to push the NWDAF ATS docker images to the docker repository:

Pre-requisites

- Oracle Linux 8 environment
- NWDAF 23.2.0.0.0 package

① Note

The NWDAF deployment package includes:

- Ready to use docker images in the images tar or zip file.
- Helm charts to help orchestrate containers in Kubernetes.

The communication between NWDAF service pods is preconfigured in the Helm charts. The following services are used for NWDAF ATS:

Table 3-3 NWDAF ATS Services

Service Name	Docker Image Name	Image Tag
ocats-nwdaf	ocats-nwdaf	23.2.0.0.0
ocats-nwdaf-notify	ocats-nwdaf-notify	23.2.0.0.0

1. Verify the checksums of tarballs mentioned in file `Readme.txt`.
2. Run the following command to extract the contents of the tar file:

```
tar -xvf nwdaf-pkg-<marketing-release-number>.tgz
```

The `nwdaf-pkg-<marketing-release-number>.tar` file contains the following NWDAF ATS Images:

- `ocats-nwdaf-notify`
- `ocats-nwdaf`

3. Run the following command to push the docker images to the docker repository:

```
docker load --input <image_file_name.tar>
```

Example:

```
docker load --input images
```

4. Run the following command to push the NWDAF ATS docker files to the docker registry:

```
docker tag <image-name>:<image-tag> <docker-repo>/<image-name>:<image-tag>
docker push <docker_repo>/<image_name>:<image-tag>
```

Where, `<docker - repo>` indicates the repository where the downloaded images can be pushed.

5. Run the following command to verify if the images are loaded:

```
docker images
```

6. Run the following command to push the helm charts to the helm repository:

```
helm cm-push --force <chart name>.tgz <helm repo>
```

3.1.6 Configuring ATS

This section describes how to configure ATS for NWDAF.

3.1.6.1 Creating and Verifying NWDAF Console Namespaces

This section explains how to create a new namespace or verify an existing namespace in the system.

Run the following command to verify if the required namespace exists in the system:

```
$ kubectl get namespaces
```

If the namespace exists, continue with the NWDAF ATS installation. If the required namespace is not available, create a namespace using the following command:

```
$ kubectl create namespace <required namespace>
```

For example:

```
$ kubectl create namespace ocats-nwdaf
```

Naming Convention for Namespaces:

The naming convention for namespaces must:

- start and end with an alphanumeric character
- contain a maximum of "63" characters
- contain only alphanumeric characters or '-'

3.1.6.2 Updating values.yaml File

Update the values.yaml file before you deploy NWDAF ATS. To update the values.yaml file:

1. In the installation package, navigate to `*root/installer/nwdaf-ats/ocn-ats-nwdaf-tool`
2. Edit the values.yaml file.
For example:

```
vim values.yaml
```

Update the following parameters in the values.yaml file:

- `imageRegistry`: Provide the registry where the images are located.
- `imageVersion`: Verify the value is 23.2.0.0.0.

Note

Ensure that the image registry path is correct, and is pointing to the docker registry where the ATS docker images are located.

3.1.6.3 Deploying NWDAF ATS in the Kubernetes Cluster

To deploy ATS, perform the following steps:

1. The values.yaml file is located inside `ocn-ats-nwdaf-tool` directory. The namespace, docker image or tag can be updated in the values.yaml file.
2. Run the following command to deploy the NWDAF ATS and its consumers in the same namespace where NWDAF suite is installed:

```
helm install <installation name> <path to the chart directory> -  
n $K8_NAMESPACE
```

For example:

```
helm install ocnwdaf-ats ocn-ats-nwdaf-tool/
```

Note

Ensure NWDAF ATS is installed in the same namespace where the NWDAF suite is installed.

3. Perform Helm installation with proxy command, run the following command:

```
helm install <installation name> <path to the chart directory> -
n $K8_NAMESPACE
--set ocatsNwdaf.config.env.JAVA_OPTS="\-Dhttps\|.proxyHost\
\=<proxy_domain>\| \| -Dhttps\|.proxyPort\|=<proxy_port>\| \| -Dhttp\
\| .nonProxyHosts\|=localhost\|,127.0.0.1\|,\|<no_proxy_host>"
```

For example:

```
helm install ocnwdaf-ats ocn-ats-nwdaf-tool/ --set
ocatsNwdaf.config.env.JAVA_OPTS="\-Dhttps\|.proxyHost\|=www-
proxy.us.oracle.com\| \| -Dhttps\|.proxyPort\|=80\| \| -Dhttp\|.nonProxyHosts\
|=localhost\|,127.0.0.1\|,\|.oracle.com\|,\|.oraclecorp\|.com"
```

Note

Provide the **ocatsNwdaf.config.env.JAVA_OPTS** field in the proxy configuration. This allows access to the internet to download the required plugins and components required for a successful ATS installation.

4. Run the following command to verify the ATS deployment status:

```
kubectl get deployments -n <namespace_name>
```

Example:

Figure 3-1 Sample Output

NAME	READY	STATUS	RESTARTS	AGE
ocats-nwdaf-deploy-54f98c447c-16vxq	1/1	Running	0	24m
ocats-nwdaf-notify-deploy-59d566b965-nxb7x	1/1	Running	0	24m
ocats-nwdaf-notify-nginx-deploy-6d54c8fdbd-r5t7h	1/1	Running	0	24m

3.1.6.4 Verifying ATS Deployment

Run the following command to verify ATS deployment:

```
helm status <release_name>
```

Once ATS is deployed, run the following commands to check the pod and service deployment:

To check pod deployment, run the command:

```
kubectl get pod -n <namespace_name>
```

To check service deployment, run the command:

```
kubectl get service -n <namespace_name>
```

Once the installation (service and pod deployment) is successfully running, track the progress of the ATS Jenkins preconfiguration process, run the following command:

```
kubectl exec -it <ats_pod_name> -- tail -f /var/lib/jenkins/.jenkins/jenkins-configure.log
```

For example:

```
kubectl exec -it ocats-nwdaf-deploy-787d4f5f84-5vmv5 -- tail -f /var/lib/jenkins/.jenkins/jenkins-configure.log
```

Wait for the preconfiguration process to complete, the following message is displayed:

Jenkins configuration finish successfully

3.2 Installing ATS for OCNADD

Following are the ATS installation procedures for Oracle Communications Network Analytics Data Director (OCNADD):

1. [Downloading the ATS Package](#)
2. [Pushing the Images to Customer Docker Registry](#)
3. [Configuring ATS](#)
4. [Deploying ATS and Stub in Kubernetes Cluster](#)
5. [Verifying ATS Deployment](#)

3.2.1 Resource Requirements

This section describes the ATS resource requirements for OCNADD.

Overview - Total Number of Resources

The following table describes the overall resource usage in terms of CPUs and memory for the following:

- OCNADD SUT
- ATS

Table 3-4 OCNADD - Total Number of Resources

Resource Name	CPU	Memory (GB)
OCNADD SUT Totals	36	183
ATS Totals	10	14
Grand Total OCNADD ATS	46	197

OCNADD Pods Resource Requirements Details

This section describes the resource requirements, which are needed to deploy OCNADD ATS successfully.

Table 3-5 OCNADD Pods Resource Requirements Details

OCNADD Service	CPUs Required per Pod	Memory Required per Pod (GB)	# Replicas (regular deployment)	# Replicas (ATS deployment)	CPUs Required - Total	Memory Required - Total (GB)
ocnaddconfiguration	1	1	1	1	1	1
ocnaddalarm	1	1	1	1	1	1
ocnaddadmin	1	1	1	1	1	1
ocnaddhealthmonitoring	1	1	1	1	1	1
ocnadduirouter	1	1	1	1	1	1
ocnaddscppaggregation	2	2	2	1	2	2
ocnaddnrfaggregation	2	2	1	1	2	2
ocnaddseppaggregation	2	2	1	1	2	2
ocnaddadapter	3	4	8	1	3	4
ocnaddkafka	5	48	3	3	15	144
zookeeper	1	1	3	3	3	3
ocnaddgui	2	1	1	1	2	1
ocnaddcache	1	10	2	2	2	20
OCNADD SUT Totals					36 CPU	183 GB

For more information about OCNADD Pods Resource Requirements, see the "Resource Requirements" section in *Oracle Communications Network Analytics Data Director Installation, Upgrade, and Fault Recovery Guide*.

ATS Resource Requirements details for OCNADD

This section describes the ATS resource requirements, which are needed to deploy OCNADD ATS successfully.

Table 3-6 ATS Resource Requirements Details

Microservice	CPUs Required per Pod	Memory Required per Pod (GB)	# Replicas (regular deployment)	# Replicas (ATS deployment)	CPUs Required - Total	Memory Required - Total (GB)
ATS Behave	2	1	1	1	2	1
OCNADD Producer Stub (SCP,NRF,SEPP)	6	12	1	1	6	12
OCNADD Consumer Stub	2	1	1	1	2	1
ATS Totals					10	14

3.2.2 Downloading the ATS Package

Locating and Downloading ATS Images

To locate and download the ATS Image from MOS:

1. Log in to [My Oracle Support](#) using the appropriate credentials.
2. Select the **Patches & Updates** tab.
3. In the **Patch Search** window, click **Product or Family (Advanced)**.
4. Enter *Oracle Communications Cloud Native Core - 5G* in the **Product** field.
5. Select *Oracle Communications Network Analytics Data Director <release_number>* from the **Release** drop-down.
6. Click **Search**. The **Patch Advanced Search Results** list appears.
7. Select the required ATS patch from the list. The Patch Details window appears.
8. Click **Download**. The File Download window appears.
9. Click the **<p>*****_<release_number>_Tekelec>.zip** file to download the OCNADD ATS package file.
10. Untar the zip file to access all the ATS Images. The **<p>*****_<release_number>_Tekelec>.zip** directory has following files:

```
ocats-ocnadd-tools-pkg-23.2.0.tgz
ocats-ocnadd-tools-pkg-23.2.0-README.txt
ocats-ocnadd-tools-pkg-23.2.0.tgz.sha256
ocats-ocnadd-custom-configtemplates-23.2.0.zip
ocats-ocnadd-custom-configtemplates-23.2.0-README.txt
```

The ocats-ocnadd-tools-pkg-23.2.0-README.txt file has all the information required for the package. The ocats-ocnadd-tools-pkg-23.2.0.tgz file has the following images and charts packaged as tar files:

```
ocats-ocnadd-tools-pkg-23.2.0.tgz
|
|_ _ _ _ _ ocats-ocnadd-pkg-23.2.0.tgz
|
|      |_ _ _ _ _ ocats-ocnadd-23.2.0.tgz (Helm Charts)
|
|      |_ _ _ _ _ ocats-ocnadd-image-23.2.0.tar (Docker Images)
|
|      |_ _ _ _ _ OCATS-ocnadd-Readme.txt
|
|      |_ _ _ _ _ ocats-ocnadd-23.2.0.tgz.sha256
|
|      |_ _ _ _ _ ocats-ocnadd-image-23.2.0.tar.sha256
|
|      |_ _ _ _ _ ocats-ocnadd-data-23.2.0.tgz (ATS test scripts and
Jenkins data)
|
|      |_ _ _ _ _ ocats-ocnadd-data-23.2.0.tgz.sha256
```

```

|
|
|_ _ _ _ _ ocstub-ocnadd-pkg-23.2.0.tgz
          |_ _ _ _ _ ocstub-ocnadd-23.2.0.tgz (Helm Charts)
          |_ _ _ _ _ ocstub-ocnadd-image-23.2.0.tar (Docker Images)
          |_ _ _ _ _ OCSTUB-ocnadd-Readme.txt
          |_ _ _ _ _ ocstub-ocnadd-23.2.0.tgz.sha256
          |_ _ _ _ _ ocstub-ocnadd-image-23.2.0.tar.sha256

```

In addition to the above images and charts, there is an `ocats-ocnadd-custom-configtemplates-23.2.0.zip` file in the package file.

`ocats-ocnadd-custom-configtemplates-23.2.0.zip`

```

|
|_ _ _ _ _ ocats-ocnadd-custom-values_23.2.0.yaml (Custom values file for
installation)
|
|_ _ _ _ _ ocats-ocnadd-custom-serviceaccount_23.2.0.yaml (Template to
create custom service account)

```

11. Copy the tar file to the OCCNE, OCI, or Kubernetes cluster where you want to deploy ATS.

3.2.3 Pushing the Images to Customer Docker Registry

Preparing to deploy ATS and Stub Pod in Kubernetes Cluster

To deploy ATS and Stub Pod in Kubernetes Cluster:

1. Run the following command to extract tar file content.
`tar -xvf ocats-ocnadd-tools-pkg-23.2.0.tgz`

The output of this command is:

```
ocats-ocnadd-pkg-23.2.0.tgz ocstub-ocnadd-pkg-23.2.0.tgz ocats-ocnadd-custom-
configtemplates-23.2.0.zip
```

2. Run the following command to extract the helm charts and docker images of ATS.
`tar -xvf ocats-ocnadd-pkg-23.2.0.tgz`

The output of this command is:

```
ocats-ocnadd-23.2.0.tgz ocats-ocnadd-23.2.0.tgz.sha256 ocats-ocnadd-
data-23.2.0.tgz ocats-ocnadd-data-23.2.0.tgz.sha256 ocats-ocnadd-
image-23.2.0.tar ocats-ocnadd-image-23.2.0.tar.sha256 OCATS-ocnadd-Readme.txt
```

Note

The `ocats-ocnadd-Readme.txt` file has all the information required for the package.

3. Run the following command to untar the ocstub package.

```
tar -xvf ocstub-ocnadd-pkg-23.2.0.tgz
```

The output of this command is:

```
ocstub-ocnadd-image-23.2.0.tar ocstub-ocnadd-23.2.0.tgz.sha256 ocstub-ocnadd-image-23.2.0.tar.sha256 ocstub-ocnadd-23.2.0.tgz OCSTUB-ocnadd-Readme.txt OCSTUB_OCNADD_Installation_Readme.txt
```

4. Run the following command to extract the content of the custom configuration templates:

```
tar -xvf ocats-ocnadd-custom-configtemplates-23.2.0.zip
```

The output of this command is:

```
ocats-ocnadd-custom-values_23.2.0.yaml (Custom yaml file for deployment of OCATS-OCNADD) ocats_ocnadd_custom_serviceaccount_23.2.0.yaml (Custom yaml file for service account creation to help the customer if required)
```

5. Run the following commands in your cluster to load the ATS docker image, 'ocats-ocnadd-image-23.2.0.tar', and push it to your registry.

```
$ docker load -i ocats-ocnadd-image-23.2.0.tar
```

```
$ docker tag docker.io/ocnaddats.repo/ocats-ocnadd:23.2.0 <local_registry>/ocnaddats.repo/ocats-ocnadd:23.2.0
```

```
$ docker push <local_registry>/ocnaddats.repo/ocats-ocnadd:23.2.0
```

6. Run the following commands in your cluster to load the Stub docker images ocstub-ocnadd-image-23.2.0.tar and push it to your registry.

```
$ docker load -i ocstub-ocnadd-image-23.2.0.tar
```

```
$ docker tag docker.io/simulator.repo/ocddconsumer:2.0.3 <local_registry>/simulator.repo/ocddconsumer:2.0.3
```

```
$ docker tag docker.io/simulator.repo/oraclenfproducer:2.0.5 <local_registry>/simulator.repo/oraclenfproducer:2.0.5
```

```
$ docker tag docker.io/utils.repo/jdk17-openssl:1.0.6 <local_registry>/utils.repo/jdk17-openssl:1.0.6
```

```
$ docker push <local_registry>/simulator.repo/ocddconsumer:2.0.3
```

```
$ docker push <local_registry>/simulator.repo/oraclenfproducer:2.0.5
```

```
$ docker push <local_registry>/utils.repo/jdk17-openssl:1.0.6
```

7. Update the image name and tag in the `ocats-ocnadd-custom-values.yaml` and `ocnaddsimulator/values.yaml` files of simulator helm as required. For `ocats-ocnadd-custom-values.yaml` update the 'image.repository' with respective `local_registry`. For `ocnaddsimulator/values.yaml` update the 'repo.REPO_HOST_PORT' and 'initContainers.repo.REPO_HOST_PORT' with respective `local_registry`.

3.2.4 Configuring ATS

3.2.4.1 Enabling Static Port

1. To enable static port:
 - In the **ocats-ocnadd-custom-values.yaml** file under service section, set the **staticNodePortEnabled** parameter value to 'true' and **staticNodePort** parameter value with valid nodePort.

```
service:
  customExtension:
    labels: {}
    annotations: {}
  type: LoadBalancer
  port: "8080"
  staticNodePortEnabled: true
  staticNodePort: "32385"
  staticLoadBalancerIPEnabled: false
  staticLoadBalancerIP: ""
```

Note

ATS supports static port. By default, this feature is not available.

Note

To enable **staticLoadBalancerIP**, set the **staticLoadBalancerIPEnabled** parameter value to 'true' and **staticLoadBalancerIP** parameter value with valid LoadBalancer IP value. By default, this is set to false.

3.2.5 Deploying ATS and Stub in Kubernetes Cluster

Note

It is important to ensure that all the three components; ATS, Stub and OCNADD are in the same namespace.

ATS and Stub support Helm deployment.

If the namespace does not exist, run the following command to create a namespace:

```
kubectl create namespace <namespace_name>
```

Note

- It is recommended to use the <release_name> as ocnadd-sim while installing stubs.
- The ATS deployment with OCNADD does not support the Persistent Volume (PV) feature. Therefore, the default value of the deployment .PVEnabled parameter in ocats-ocnadd-custom-values.yaml must not be changed. By default, the parameter value is set to **false**.

Deploying ATS:

```
helm install -name <release_name> ocats-ocnadd-23.2.0.tgz --namespace  
<namespace_name> -f <values-yaml-file>
```

Example:

```
helm install -name ocats ocats-ocnadd-23.2.0.tgz --namespace ocnadd -f ocats-  
ocnadd-custom-values.yaml
```

Deploying Stubs:

```
helm install -name <release_name> <ocstub-ocnadd-chart> --namespace  
<namespace_name>
```

Note

For more details about installing the stub, refer the OCSTUB_OCNADD_Installation_Readme.txt file.

Example:

```
helm install -name ocnadd-sim ocnaddsimulator --namespace ocnadd
```

3.2.6 Verifying ATS Deployment

Run the following command to verify ATS deployment.

```
helm status <release_name> -n <namespace>
```

Once ATS and Stub are deployed, run the following commands to check the pod and service deployment:

To check pod deployment:

```
kubectl get pod -n ocnadd
```

To check service deployment:

```
kubectl get service -n ocnadd
```

4

Running Test Cases Using ATS

This section describes how to run test cases using ATS. It includes:

- [Running NWDAF Test Cases using ATS](#)
- [Running OCNADD Test Cases using ATS](#)

4.1 Running NWDAF Test Cases using ATS

This section describes how to run Networks Data Analytics Function (NWDAF) test cases using ATS.

Prerequisites

To run NWDAF test cases, ensure that the following prerequisites are met:

- The ATS version must be compatible with the NWDAF release.
- The NWDAF and ATS must be deployed in the same namespace.
- The NWDAF must be deployed using the appropriate `values.yaml` file as per the configuration to be tested.
- Ensure a nodePort or LoadBalancer port is available for "ocats-nwdaf-deploy".

Logging into ATS

Running ATS

Before logging into ATS, you need to ensure that ATS is deployed successfully using HELM charts.

For more information on verifying ATS deployment, see [Verifying ATS Deployment](#).

Note

To modify default log in password, refer to [Modifying Login Password](#).

Build the Jenkins host IP and load the Jenkins tool, run the following command to obtain the ocats-nwdaf-deploy service port:

```
kubectl get svc -n <namespace> | grep ocats-nwdaf-deploy
```

To obtain ocn-ats-nwdaf-tool pod IP:

- Obtain the node and pod name, run the following command:

```
kubectl get pod -o=custom-columns=NODE:.spec.nodeName,NAME:.metadata.name -n <namespace> | grep ocats-nwdaf-deploy
```

- If an external IP is used, obtain the external Kubernetes node IP. Run the following command:

```
kubectl get no -o wide
```

- Build the IP host as <External Node IP> : <Host IP>

ATS Login

1. To log in to ATS, open a browser and provide the IP Address and port details as <Worker-Node-IP>:<Node-Port-of-ATS>.

Figure 4-1 ATS Login



Welcome to Jenkins!

Username

Password


☐ Keep me signed in

Sign in

To run ATS, enter the login credentials. Click **Sign in**.

2. **Customize Jenkins** page appears. Close this page.
3. **Jenkins is ready!** page appears, click **Start Using Jenkins**.
4. Dashboard screen displaying the NWDAF preconfigured pipelines appears.

Figure 4-2 Pipelines

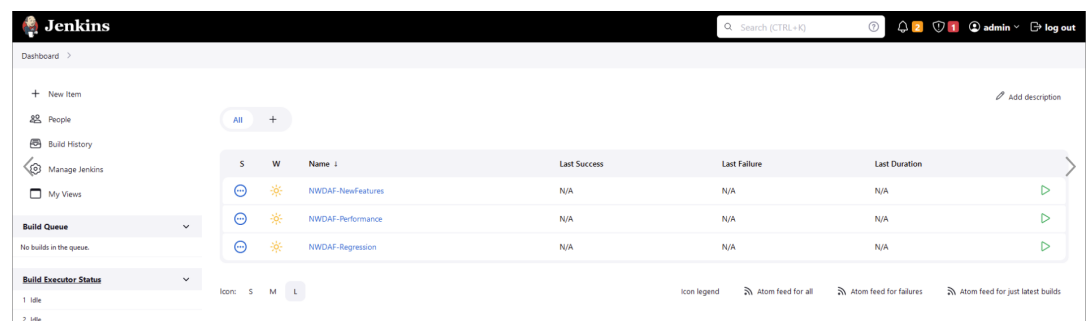

The screenshot shows the Jenkins Dashboard with a sidebar on the left containing links like 'New Item', 'People', 'Build History', 'Manage Jenkins', and 'My Views'. The main area displays a table of pipelines with columns for status (S), warning (W), name, last success, last failure, and last duration. There are three pipelines listed: 'NWDAF-NewFeatures', 'NWDAF-Performance', and 'NWDAF-Regression', all with a status of 'S' and 'N/A' for last success and last failure. A 'Build Queue' section at the bottom left shows 'No builds in the queue'. A 'Build Executor Status' section at the bottom left shows '1 idle' and '2 idle' executors. The top right of the dashboard has a search bar and user information (admin) with a 'log out' link.

S	W	Name	Last Success	Last Failure	Last Duration
S		NWDAF-NewFeatures	N/A	N/A	N/A
S		NWDAF-Performance	N/A	N/A	N/A
S		NWDAF-Regression	N/A	N/A	N/A

The NWDAF ATS has three configured pipelines:

- NWDAF-NewFeatures
- NWDAF-Performance
- NWDAF-Regression


Configure NWDAF Pipelines

To run configure a pipeline perform the following steps:

Prerequisites

- The user database access includes permission to retrieve, update, and delete information.
 - The user has logged in to the Jenkins page with admin credentials.
1. Select the pipeline you want to run the test cases on, click **NWDAF-NewFeatures** in the **Name** column. The following screen appears:

Figure 4-3 Pipeline Configuration

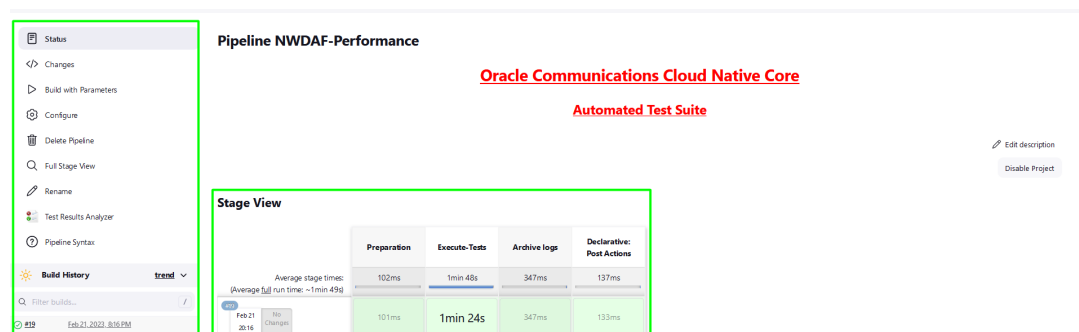


In the above screen:

- Click **Configure** to configure the NWDAF pipeline.
 - Click **Build History** box to view all the previous pipeline executions, and the Console Output of each execution.
 - The **Stage View** represents the previously executed pipelines for reference.
 - The **Test Results Analyzer** is the plugin integrated into the OCNWDAF-ATS. This option can be used to display the build-wise history of all the executions. It will provide a graphical representation of the past execution together.
2. Click **Configure** to configure the environment parameters of the pipeline. User must wait for the page to load completely. Once the page loads completely, move to the **Pipeline** section:

Note

Make sure that the following page loads completely before you perform any action on it. Also, do not modify any configuration other than shown below.

Figure 4-4 Configure Pipeline

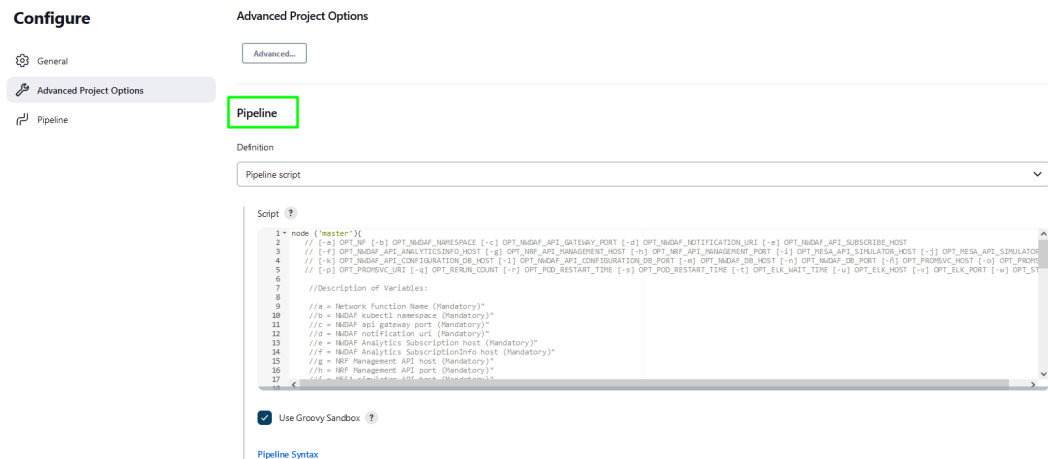**Note**

Remove the existing default content of the pipeline script.

3. Depending on the pipeline you want to configure, use the respective script. The following scripts are available at: `/var/lib/jenkins/ocnwdaf_tests/pipeline_scripts`:
 - `NewFeatures_Pipeline_script.txt`
 - `Regression_Pipeline_script.txt`
 - `Performance_Pipeline_script.txt`
4. Update the script of the pipeline you want to configure, and update the parameters according to the ATS and NWDAF environment you want to test.
 - a. - **b** : Use this option to update the namespace according to the current namespace being used.
 - b. - **c** : Use this option to update the service name of the Ingress gateway according to the current service name of the Ingress gateway being used.
Run the following command in the NWDAF console to verify the current service name of the Ingress gateway:

```
kubectl get svc -n <namespace_name> | grep ingress
```

For example:

```
kubectl get svc -n mdc-nwdaf-qa | grep ingress
```

Figure 4-5 Ingress Gateway

```
nwdaf-ingress-gateway      $ kubectl get svc -n mdc-nwdaf-qa | grep ingress
nwdaf-ingress-gateway      NodePort    10.233.12.1    <none>        80:30277/TCP,81:31960/TCP
```

- c. Verify if the same name is assigned to "**-c = NWDAF api gateway**" host field, if not update to match the current name. Use the option "**-c nwdaf-ingress-gateway**".


- d. **-g** : Use this option to update the service name of the MESA simulator according to the current service name of the MESA simulator being used.
Run the following command in the NWDAF console to verify the current service name of the Mesa simulator:

```
kubectl get svc -n <namespace_name> | grep mesa
```

For example:

```
kubectl get svc -n mdc-nwdaf-qa | grep mesa
```

Figure 4-6 Mesa Simulator



```
$ kubectl get svc -n mdc-nwdaf-qa | grep mesa
mesa-simulator ClusterIP 10.233.15.130 <none> 8080/TCP,9000/TCP
```


- e. Verify if the same name is assigned to "**-g = MESA simulator API**" host field, if not update to match the current name. Use the option "**-g mesa-simulator **".
- f. **-i** : Use this option to update the service name of the NWDAF Configuration Service according to the current service name of the NWDAF Configuration Service being used.
Run the following command in the NWDAF console to verify the current service name of the NWDAF Configuration Service:

```
kubectl get svc -n <namespace_name> | grep configuration
```

For example:

```
kubectl get svc -n mdc-nwdaf-qa | grep configuration
```

Figure 4-7 Configuration Service



```
$ kubectl get svc -n mdc-nwdaf-qa | grep configuration
ocn-nwdaf-configuration-service ClusterIP 10.233.46.145 <none> 8080/TCP,9000/TCP
```

- g. Verify if the same name is assigned to "**-i = NWDAF CONFIGURATION API**" host field, if not update to match the current name. Use the option "**-i ocn-nwdaf-configuration-service **".
5. Update the following parameters according to the database setup:
- q** : Use this option to update the NWDAF database host name, it can be FQDN or IP address.
For example:
**-q 10.75.245.174 **
 - r** : Use this option to update the NWDAF database port, it can be Cluster IP or Node Port.
For example:
**-r 32648 **
6. Update the **-s db_user_id** and **-t db_user_psw** variables with the current data base user credentials, follow the steps listed below:

- a. Provide the userid and password of the database to be encrypted. Navigate to ocats-nwdaf-deploy pod and run the command:

```
kubectl exec -it <pod_name> -n <namespace_name> bash
```

For example:

```
kubectl exec -it ocats-nwdaf-deploy-54f98c447c-16vxq -n ocnwdaf-ns bash
```

- b. From the console, run the following command:

```
cd /env/lib/python3.9/site-packages/ocnnwdaf_lib/db_mgt
```

- c. To update the user id run the following command from the console:


```
python -c "from db_connection_mgt import *;
print(encode_values_data('<user>'))"
```

- d. To update the password run the following command from the console:

```
python -c "from db_connection_mgt import *;
print(encode_values_data('<password>'))"
```

- e. Copy and paste the encrypted user id and password into the pipeline script located in the bottom of the page.
For example:

Figure 4-8 Sample Output

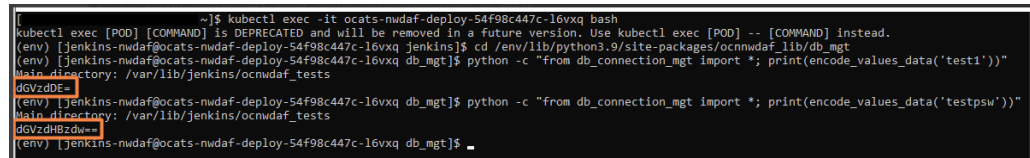

```

~]$ kubectl exec -it ocats-nwdaf-deploy-54f98c447c-16vxq bash
kubectl exec [POD] [COMMAND] is DEPRECATED and will be removed in a future version. Use kubectl exec [POD] -- [COMMAND] instead.
(env) [jenkins-nwdaf@ocats-nwdaf-deploy-54f98c447c-16vxq jenkins]$ cd /env/lib/python3.9/site-packages/ocnnwdaf_lib/db_mgt
(env) [jenkins-nwdaf@ocats-nwdaf-deploy-54f98c447c-16vxq db_mgt]$ python -c "from db_connection_mgt import *; print(encode_values_data('test1'))"
Main directory: /var/lib/jenkins/ocnwdaf_tests
dGVzdDE=
(env) [jenkins-nwdaf@ocats-nwdaf-deploy-54f98c447c-16vxq db_mgt]$ python -c "from db_connection_mgt import *; print(encode_values_data('testpsw'))"
Main directory: /var/lib/jenkins/ocnwdaf_tests
dGVzdHBzdE==
(env) [jenkins-nwdaf@ocats-nwdaf-deploy-54f98c447c-16vxq db_mgt]$

```

Figure 4-9 Pipeline Script

```

40 //C = To Enable/Disable Stub logs collection"
41
42 if("${SUT}" == "NWDAF"){
43 sh '''
44   sh /var/lib/jenkins/ocnwdaftests/preTestConfig-
45   -a NWDAF \
46   -b ocnwdaftests \
47   -c ingress-gateway-service \
48   -d 80 \
49   -e http://ocats-nwdaftests-nginx:5000 \
50   -f http://ocats-nwdaftests-nginx:5000 \
51   -g mesa-simulator-service \
52   -h 8080 \
53   -i ocn-nwdaftests-configuration-service \
54   -j 8080 \
55   -k 0 \
56   -l 0 \
57   -m nwdaftests-cap4c-kafka-ui-nodeport-svc \
58   -n 8080 \
59   -o 0 \
60   -p 0 \
61   -q mysql \
62   -r 3306 \
63   -s dGVzdDE= \
64   -t dGVzdHBzdW== \
65   -u ocne-prometheus-server.ocne-infra \
66   -v 80 \
67   -w /prometheus/api/v1 \
68   -x 0 \
69   -y 45 \
70   -z 0 \

```

- f. Select the **Use Groovy Sandbox** checkbox.
7. Click **Save**. Perform the above steps for **NWDAF-Regression** and **NWDAF-Performance** pipelines.

Run the NWDAF ATS test scripts

1. To run the test cases, click **Build with Parameters**.
2. The TestSuite multi-option page is displayed, ensure the SUT value is NWDAF.

Figure 4-10 TestSuite Page

Pipeline NWDAF-NewFeatures

This build requires parameters:

Oracle Communications Automated Test Suite - NWDAF

TestSuite
NewFeatures

Configuration_Type
Product_Config ▾

SUT
NWDAF ▾

Select_Option
☒ All
☐ Single/MultipleFeatures
☐ MultipleFeatures_MultipleTestCases

Features
• nwdaf_subscription_ab_geofence_creation
• nwdaf_subscription_ab_geofence_update
• nwdaf_subscription_ab_geofence_delete

TestCases
Total of Features are: 3 & Total of Test Cases are : 7

3. To run all scripts available, select **All** and click **Build**.
4. To run scripts on a specific feature, select **Single/MultipleFeatures** option and select the **Feature** you want to run the test on and click **Build**.

Figure 4-11 Single/Multiple Features

Oracle Communications Automated Test Suite - NWDAF

TestSuite

NewFeatures

Configuration_Type

Product_Config ▾

SUT

NWDAF ▾

Select_Option

☐ All

☒ Single/MultipleFeatures

☐ MultipleFeatures_MultipleTestCases

Features

☒ nwdaf_subscription_ab_geofence_creation

☐ nwdaf_subscription_ab_geofence_update

☐ nwdaf_subscription_ab_geofence_delete

TestCases

Total of Features are: 1 & Total of Test Cases are : 5

nwdaf_subscription_ab_geofence_creation

- Validate an AB subscription isn't created with GEOFENCE and both geographicAreas and nwArealInfo
- Validate an abnormal behaviour subscription is created with GEOFENCE and geographicAreas
- Validate an AB subscription isn't created with GEOFENCE and without snssais
- Validate an AB subscription isn't created with GEOFENCE without geographicArea nor nwArealInfo
- Validate an AB subscription isn't created with GEOFENCE without pointList in geographicArea

5. To run scripts on a specific test scenario, select **MultipleFeatures_MultipleTestCases** option and select the **Feature** and the **TestCases** you want to run the test on and click **Build**.

Figure 4-12 Multiple Features and Testcases

Oracle Communications Automated Test Suite - NWDAF

TestSuite

NewFeatures

Configuration_Type
Product_Config

SUT
NWDAF

Select_Option
☐ All
☐ Single/MultipleFeatures
☒ MultipleFeatures_MultipleTestCases

Features
☐ nwda_f_subscription_ab_geofence_creation
☒ nwda_f_subscription_ab_geofence_update
☐ nwda_f_subscription_ab_geofence_delete

TestCases
 Total of Features are: 1 & Total of Test Cases are : 1
 nwda_f_subscription_ab_geofence_update
☒ Subscription update request by NWDAF for Geofence

Build Cancel

6. The **Build History** menu displays the list of running jobs, select the latest job displayed in the list.
7. Click the **Console Output** option for this job. The jobs progress can be visualized in the log. The job progress also displays results for test cases and pipelines completed. For example:

Figure 4-13 Sample Output

```
1 feature passed, 0 failed, 0 skipped
3 scenarios passed, 0 failed, 18 skipped
30 steps passed, 0 failed, 162 skipped, 0 undefined
Took 0m45.569s
[Pipeline] sh
```

Figure 4-14 Sample Output

```
No new Custom Features xmls Available
[Pipeline] }
[Pipeline] // script
[Pipeline] }
[Pipeline] // node
[Pipeline] echo
Pipeline passed
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // load
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

4.2 Running OCNADD Test Cases using ATS

This section describes how to run Oracle Communications Network Analytics Data Director (OCNADD) test cases using ATS. It includes:

- [Prerequisites](#)
- [Logging into ATS](#)
- [OCNADD-NewFeatures Pipeline](#)

4.2.1 Prerequisites

To run OCNADD test cases, ensure that the following prerequisites are met:

- The ATS version must be compatible with the OCNADD release.
- The OCNADD, ATS, and Stub must be deployed in the same namespace.

4.2.2 Logging into ATS

Before logging into ATS, you need to ensure that ATS is deployed successfully using HELM charts as shown below:

```
[ocnadd@k8s-bastion ~]$ helm status ocats -n ocnadd
NAME: ocats
LAST DEPLOYED: Sat Nov  3 03:48:27 2022
NAMESPACE: ocnadd
STATUS: deployed
REVISION: 1
TEST SUITE: None
NOTES:
# Copyright 2018 (C), Oracle and/or its affiliates. All rights reserved.
```

Thank you for installing ocats-ocnadd.

Your release is named ocats , Release Revision: 1.
To learn more about the release, try:

```
$ helm status ocats
$ helm get ocats

[ocnadd@k8s-bastion ~]$ kubectl get pod -n ocnadd | grep ocats
ocats-ocats-ocnadd-54ffddb548-4j8cx          1/1      Running    0          9h

[ocnadd@k8s-bastion ~]$ kubectl get svc -n ocnadd | grep ocats
ocats-ocats-ocnadd          LoadBalancer    10.20.30.40    <pending>
8080:12345/TCP              9h
```

For more information on verifying ATS deployment, see [Verifying ATS Deployment](#).


To log in to ATS, open a browser and provide the IP Address and port details as <Worker-Node-IP>:<Node-Port-of-ATS>.

Note

If LoadBalancer IP is provided, then give <LoadBalancer IP>:8080

Figure 4-15 ATS Login

Oracle Communications Cloud Native Core - Automated Test Suite



Running ATS

To run ATS:

1. Enter the login credentials. Click **Sign in**. The following screen appears.

Figure 4-16 OCNADD Pre-Configured Pipelines

S	W	Name	Last Success	Last Failure	Last Duration
		NADD-NewFeatures	N/A	N/A	N/A
		NADD-Performance	N/A	N/A	N/A
		NADD-Regression	N/A	N/A	N/A

OCNADD ATS has three pre-configured pipelines.


- **OCNADD-NewFeatures:** This pipeline has all the test cases delivered as part of OCNADD ATS - 23.2.0.
- **OCNADD-Performance:** This pipeline is not operational as of now. It is reserved for future releases of ATS.
- **OCNADD-Regression:** This pipeline is not operational as of now. It is reserved for future releases of ATS.

4.2.3 OCNADD-NewFeatures Pipeline

OCNADD-NewFeatures Pipeline

This is a pre-configured pipeline where users can run all the OCNADD new test cases. To configure its parameters, which is a one time activity, perform the following steps:

1. Click **OCNADD-NewFeatures** in the **Name** column. The following screen appears:

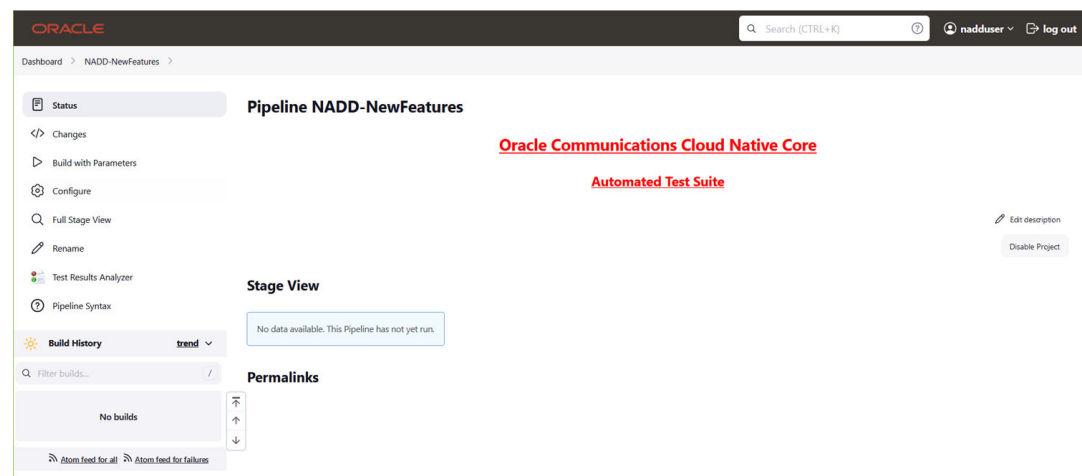Figure 4-17 Configuring OCNADD-New Features

In the above screen:


- Click **Configure** to configure OCNADD-New Features.
 - Click **Build History** box to view all the previous pipeline executions, and the Console Output of each execution.
 - The **Stage View** represents the previously executed pipelines for reference.
 - The **Test Results Analyzer** is the plugin integrated into the OCNADD-ATS. This option can be used to display the build-wise history of all the executions. It will provide a graphical representation of the past execution together.
2. Click **Configure**. Once the page loads completely, click the **Pipeline** tab:

Note

Make sure that the **Configure** page loads completely before you perform any action on it. Also, do not modify any configuration other than shown below.

The **Pipeline** section of the configuration page appears as follows:

Figure 4-18 Pipeline Section

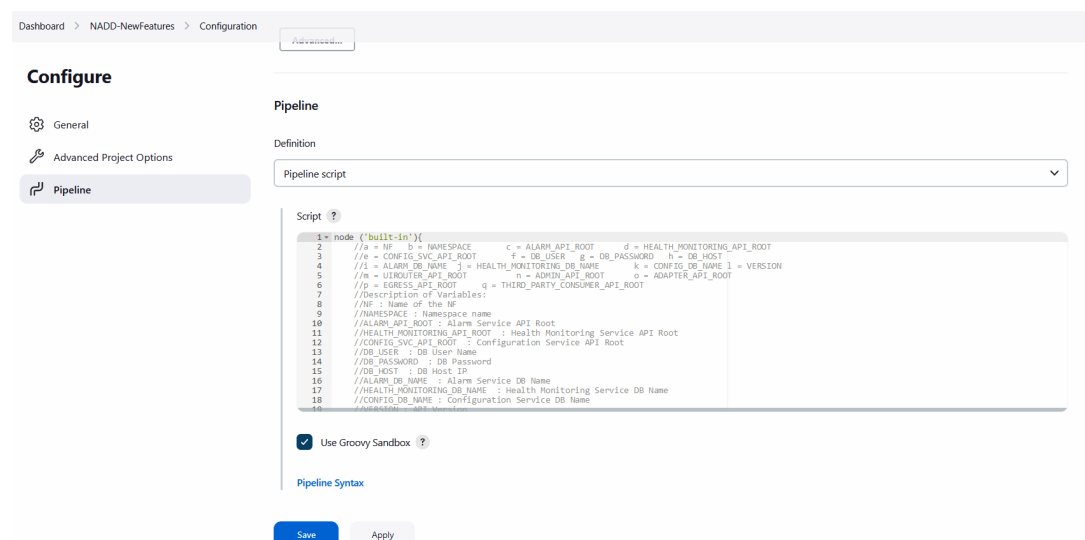

Dashboard > NADD-NewFeatures > Configuration

Configure

General
Advanced Project Options
Pipeline

Pipeline

Definition

Pipeline script

Script ?

```

1= node('built-in'){
2  //a = NF      b = NAMESPACE      c = ALARM_API_ROOT      d = HEALTH_MONITORING_API_ROOT
3  //e = CONFIG_SVC_API_ROOT      f = DB_USER      g = DB_PASSWORD      h = DB_HOST
4  //i = ALARM_DB_NAME      j = HEALTH_MONITORING_DB_NAME      k = CONFIG_DB_NAME      l = VERSION
5  //m = USEROUTER_API_ROOT      n = ADMIN_API_ROOT      o = ADAPTER_API_ROOT
6  //p = EGRESS_API_ROOT      q = THIRD_PARTY_CONSUMER_API_ROOT
7  //Description of Variables:
8  //NF : Name of the NF
9  //NAMESPACE : Namespace name
10 //ALARM_API_ROOT : Alarm Service API Root
11 //HEALTH_MONITORING_API_ROOT : Health Monitoring Service API Root
12 //CONFIG_SVC_API_ROOT : Configuration Service API Root
13 //DB_USER : DB User Name
14 //DB_PASSWORD : DB Password
15 //DB_HOST : DB Host IP
16 //ALARM_DB_NAME : Alarm Service DB Name
17 //HEALTH_MONITORING_DB_NAME : Health Monitoring Service DB Name
18 //CONFIG_DB_NAME : Configuration Service DB Name
19 //ADMIN_API_ROOT : Admin API Root
20 //ADAPTER_API_ROOT : Adapter API Root

```

☒ Use Groovy Sandbox ?

Pipeline Syntax

Save Apply

Important

Remove the existing default content of the pipeline script and copy the following script content.

The content of the pipeline script is as follows:

```

node('built-in'){
    //a= NF      b = NAMESPACE      c = VERSION      d = DB_HOST      e =
DB_USER      f = DB_PASSWORD
    //g= ALARM_DB_NAME      h = HEALTH_MONITORING_DB_NAME      i =
CONFIG_DB_NAME
    //j= ALARM_API_ROOT      k = HEALTH_MONITORING_API_ROOT      l =

```

```

CONFIG_SVC_API_ROOT
    //m= UIROUTER_API_ROOT    n = ADMIN_API_ROOT    o =
THIRD_PARTY_CONSUMER_API_ROOT
    //p= BACKUP_RESTORE_IMG_PATH    q = ALERT_MANAGER_URI
    //Description of Variables:
    //NF: Name of the NF
    //NAMESPACE: Namespace name
    //VERSION: API Version
    //DB_HOST: DB Host IP
    //DB_USER: DB User Name
    //DB_PASSWORD: DB Password
    //ALARM_DB_NAME: Alarm Service DB Name
    //HEALTH_MONITORING_DB_NAME: Health Monitoring Service DB
Name
    //CONFIG_DB_NAME: Configuration Service DB Name
    //ALARM_API_ROOT: Alarm Service API Root
    //HEALTH_MONITORING_API_ROOT: Health Monitoring Service API
Root
    //CONFIG_SVC_API_ROOT: Configuration Service API Root
    //UIROUTER_API_ROOT: UI Router API Root
    //ADMIN_API_ROOT: Admin Service API Root
    //THIRD_PARTY_CONSUMER_API_ROOT: Third Party Consumer API Root
    //BACKUP_RESTORE_IMG_PATH: Repository path for Backup restore
image
    //ALERT_MANAGER_URI: Alert Manager API Root
sh '''
    sh /var/lib/jenkins/ocnadd_tests/preTestConfig-NewFeatures-
NADD.sh \
    -a NADD \
    -b v3 \
    -c <ocnadd-namespace> \
    -d <DB_HOST> \
    -e <DB_USER> \
    -f <DB_PASSWORD> \
    -g alarm_schema \
    -h healthdb_schema \
    -i configuration_schema \
    -j ocnaddalarm:9099 \
    -k ocnaddhealthmonitoring:12591 \
    -l ocnaddconfiguration:12590 \
    -m ocnaddbackendrouter:8988 \
    -n ocnaddadminservice:9181 \
    -o ocnaddthirdpartyconsumer:9094 \
    -p <repo-path>/ocdd.repo/ocnaddbackuprestore:<tag> \
    -q occne-kube-prom-stack-kube-alertmanager.occne-
infra.svc.<domainName>:80/<clusterName> \
'''
    if(env.Include_Regression && "${Include_Regression}" == "YES"){
        sh '''sh /var/lib/jenkins/common_scripts/
merge_jenkinsfile.sh'''
        load "/var/lib/jenkins/ocnadd_tests/jenkinsData/
Jenkinsfile-NADD-Merged"
    }
    else{
        load "/var/lib/jenkins/ocnadd_tests/jenkinsData/
Jenkinsfile-NADD-NewFeatures"

```

```

    }
}

```

You can modify pipeline script parameters from "-b" to "-q" on the basis of your deployment environment, click on 'Save' after making the necessary changes.

The description of all the script parameters is as follows:

- a: Name of the NF to be tested in the capital (NADD).(Must not be modified)
- b: Namespace in which the NADD is deployed. (ocnadd)
- c: API Version. (v3)
- d: DB Host IP as provided during deployment of NADD. (10.XX.XX.XX)
- e: DB Username as provided during deployment of NADD.
- f: DB password as provided during deployment of NADD.
- g: DB Schema Name of ocnaddalarm microservice as provided during deployment of NADD. (alarm_schema)
- h: DB Schema Name of ocnaddhealthmonitoring microservice as provided during deployment of NADD. (healthdb_schema)
- i: DB Schema Name of ocnaddconfiguration microservice as provided during deployment of NADD. (configuration_schema)
- j: API root endpoint to reach ocnaddalarm microservice of NADD. (<Worker-Node-IP>:<Node-Port-of-ocnaddalarm>) or default value
- k: API root endpoint to reach ocnaddhealthmonitoring microservice of NADD. (<Worker-Node-IP>:<Node-Port-of-ocnaddhealthmonitoring>) or default value
- l: API root endpoint to reach ocnaddconfiguration microservice of NADD. (<Worker-Node-IP>:<Node-Port-of-ocnaddconfiguration>) or default value
- m: API root endpoint to reach ocnaddbackendrouter microservice of NADD. (Not used in the current release, use the default value)
- n: API root endpoint to reach ocnaddadminservice microservice of NADD. (Not used in the current release, use the default value)
- o: API root endpoint to reach ocnaddthirdpartyconsumer microservice of NADD. (<Worker-Node-IP>:<Node-Port-of-ocnaddthirdpartyconsumer>) or default value
- p: Repository path for ocnaddbackuprestore image.
- q: API root endpoint to reach alert manager microservice.

Running OCNADD Test Cases

To run OCNADD test cases, perform the following steps:

1. Click the **Build with Parameters** link available in the left navigation pane of the **NADD-NewFeatures** Pipeline screen. The following page appears:

Figure 4-19 Pipeline NADD_NewFeatures



2. Select **Configuration_Type** as **Product_Config**.
3. Set **Include_Regression** to 'NO' from the drop-down list.
4. In **Select_Option**:
 - Select **All** to run all the feature test cases and click the **Build** button to execute the pipeline
 - Choose **Single/MultipleFeatures** to run the specific feature test cases and click the **Build** button to execute the pipeline