

Oracle® Communications

Networks Data Analytics Function User Guide



Release 23.2.0

F80228-02

August 2023

ORACLE®

Copyright © 2022, 2022, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1	Introduction	
1.1	Overview	1
1.2	References	2
2	OCNWDAF Architecture	
2.1	Oracle Communications Networks Data Analytics Function Architecture	1
2.2	Oracle Communications Networks Data Analytics Function Design	2
3	OCNWDAF Features	
3.1	Automated Test Suite Support	1
3.2	Support for Georedundancy	1
3.3	Service Mesh for Intra-NF Communication	11
4	OCNWDAF Interfaces	
4.1	OCNWDAF Data Collection from NFs	1
4.2	Analytics Collection by a Network Function	1
5	OCNWDAF Services	
5.1	Analytics Subscription Service	1
5.2	Analytics Information Service	2
5.3	Data Collection Service	2
5.4	Analytics Generation Service	7
5.5	Analytics Database Service	7
6	OCNWDAF Subscription and Analytics Requests	
6.1	Analytics Subscription Request to the OCNWDAF	1
6.2	Analytics Information Request to OCNWDAF	1
6.3	Correlation between Network Data and Service Data	2

7	OCNWDAF Analytics	
7.1	Slice Load Level Analytics	3
7.2	UE Related Analytics	7
7.2.1	UE Mobility Analytics	8
7.2.2	User Equipment (UE) Abnormal Behavior Analytics	11
7.3	Network Function (NF) Load Analytics	18
7.4	Network Performance Analytics	26
8	Configuring OCNWDAF Using CNC Console	
8.1	OCNWDAF GUI Login	1
8.2	Slice Load Monitoring	2
8.3	Slice Load Monitoring	3
8.4	NF Load Monitoring	4
8.5	Geofence Monitoring	4
8.6	OCNWDAF Configuration Page	5
8.6.1	Slices Setting Screen	6
8.6.1.1	Add a New Slice	7
8.6.1.2	Edit an Existing Slice	8
8.6.1.3	Delete a Slice	9
8.6.2	Geographical Settings	9
8.6.2.1	Create New Region	9
8.6.2.2	Select Existing Region and Edit Cells	10
8.6.3	Geofence Settings	12
8.6.3.1	Add New Geofence	12
8.6.3.2	Edit Value	14
8.6.3.3	Delete	14
9	Supported REST API Interfaces	
9.1	Analytics Subscription Service	1
9.2	Analytics Information Service	2
9.3	OCNWDAF Analytics APIs	3
9.3.1	UE Abnormal Behavior Analytics	4
9.3.2	Slice Load Level Analytics	8
9.3.3	UE Mobility Analytics	10
9.3.4	NF Load Analytics	12
9.3.5	Network Performance Analytics APIs	16

10 OCNWDAF Alerts

10.1	OCNWDAF Alert Configuration	1
10.2	System Level Alerts	3
10.3	Application Level Alerts	7

My Oracle Support

My Oracle Support (<https://support.oracle.com>) is your initial point of contact for all product support and training needs. A representative at Customer Access Support can assist you with My Oracle Support registration.

Call the Customer Access Support main number at 1-800-223-1711 (toll-free in the US), or call the Oracle Support hotline for your local country from the list at <http://www.oracle.com/us/support/contact/index.html>. When calling, make the selections in the sequence shown below on the Support telephone menu:

- For Technical issues such as creating a new Service Request (SR), select **1**.
- For Non-technical issues such as registration or assistance with My Oracle Support, select **2**.
- For Hardware, Networking, and Solaris Operating System Support, select **3**.

You are connected to a live agent who can assist you with My Oracle Support registration and opening a support ticket.

My Oracle Support is available 24 hours a day, 7 days a week, 365 days a year.

Acronyms

The following table provides information about the acronyms and the terminology used in the document.

Table Acronyms

Acronym	Description
3GPP	3rd Generation Partnership Project
5GC	5G Core Network
5GS	5G System
AF	Application Function
API	Application Programming Interface
AMF	Access and Mobility Management Function
AnLF	Analytics Logical Function
ASM	Aspen Service Mesh
CAP4C	Converged Analytics Platform for Communication
CNC	Cloud Native Core
CNE	Oracle Communications Cloud Native Core, Cloud Native Environment
CSP	Communications Service Provider
FE	Front End
FQDN	Fully Qualified Domain Name
GUI	Graphical User Interface
HTTPS	Hypertext Transfer Protocol Secure
KPI	Key Performance Indicator
HA	High Availability
IMSI	International Mobile Subscriber Identity
K8s	Kubernetes
MDT	Mobile Data Terminal
ME	Monitoring Events
MICO	Mobile Initiated Connection Only
ML	Machine Learning
MLOPs	Machine Learning Operations
MTLF	Model Training Logical Function
Network Slice	A logical network that provides specific network capabilities and network characteristics.
NEF	Oracle Communications Cloud Native Core, Network Exposure Function
NF	Network Function
NRF	Oracle Communications Cloud Native Core, Network Repository Function
NSI	Network Slice instance. A set of Network Function instances and the required resources (such as compute, storage and networking resources) which form a deployed Network Slice.
NSSF	Oracle Communications Cloud Native Core, Network Slice Selection Function

Table (Cont.) Acronyms

Acronym	Description
OCNWDAF	Oracle Communications Networks Data Analytics Function
OAM	Operations, Administration, and Maintenance
PLMN	Public Land Mobile Network
RAN	Radio Access Network
REST	Representational State Transfer
SBA	Service Based Architecture
SBI	Service Based Interface
SMF	Session Management Function
SNMP	Simple Network Management Protocol
SUPI	Subscription Permanent Identifier
UDM	Unified Data Management
UE	User Equipment
UPF	User Plane Function
UDR	Oracle Communications Cloud Native Core, Unified Data Repository
UDM	Unified Data Management
URI	Uniform Resource Identifier

What's New in This Guide

This section introduces the documentation updates for Release 23.2.x in Oracle Communications Networks Data Analytics Function User Guide.

Release 23.2.0.0.1 - F80228-02, August 2023

There are no updates to this document in this release.

Release 23.2.0 - F80228-01, June 2023

- **Support for Geofencing Analytics:** The [User Equipment \(UE\) Abnormal Behavior Analytics](#) section is updated to include the new geofence analytics information. To configure geofences, see [Geofence Settings](#). To monitor geofences, see [Geofence Monitoring](#).
- **Network Performance Analytics ID:** Added a new section, [Network Performance Analytics](#) for this feature. The supported Rest APIs for this feature are documented in the [Network Performance Analytics APIs](#) section.
- **Service Mesh Integration:** Added a new section, [Service Mesh for Intra-NF Communication](#) for this feature.
- Updated the sections in the [Configuring OCNWDAF Using CNC Console](#) chapter with the latest GUI screens.

1

Introduction

The Oracle Communications Networks Data Analytics Function (OCNWDAF) is a Network Function (NF) that assists in collecting and analyzing data in a 5G network. This document provides information about the role of Oracle Communications Networks Data Analytics Function (OCNWDAF) in 5G Network Architecture and OCNWDAF services and managed objects.

1.1 Overview

Oracle Communications Network Data Analytics Function (OCNWDAF) is a Network Function (NF) in the 5G core network of the 5G Network Architecture.

About Oracle Communications Networks Data Analytics Function

The OCNWDAF enables the operator to collect and analyze the data in the network through an analytics function. The 5G technology requires prescriptive analytics to drive closed-loop automation and self-healing networks. In a 5G network, the consumers of data are 5G NFs, Application Functions (AFs), and Operations, Administration, and Maintenance (OAM) and the data producers are NFs. The OCNWDAF supports the following functions:

- OCNWDAF collects data from Access and Mobility Management Function (AMF), Session Management Function (SMF), and Network Repository Function (NRF) in the network. The data is collected directly from the NFs or through the Network Exposure Function (OCNEF).
- The OCNWDAF is designed to provide analytics information to consumer such as NFs, AFs and OAM.

A 5G network contains a vast number of devices and sensors generating an enormous amount of data. The OCNWDAF function allows the Communications Service Providers (CSPs) to efficiently monitor, manage, automate, and optimize their network operations by the data collected and analytics generated across the network. The OCNWDAF also helps the CSPs in achieving the operational efficiency and provides an enhanced service experience.

The analytics information provided by the OCNWDAF is either statistical information based on past events or predictive information. This analytics information is used to balance the resources on the network. The OCNWDAF can predict the User Equipment (UE) location and also detect if the UE is in an abnormal location. Based on the collected analytics information, the CSPs can roll out new services or modify the existing services without waiting for a maintenance window in the network. This ensures significantly fewer chances of network experiencing downtime.

An OCNWDAF consumer can avail analytics information for different analytic events. Alternatively, the consumers can subscribe or unsubscribe for specific analytics information as a one-time event or periodically get notified when a specifically defined event (for example, a threshold is breached) is detected.

The NRF discovers the OCNWDAF instances for the NF consumers in the network. The OCNWDAF information can also be locally configured on the NF consumers. The OCNWDAF selection function in the consumer NF selects an OCNWDAF instance among available OCNWDAF instances. Different OCNWDAF instances present in the 5G network can be

configured to provide a specific type of analytics information. This information about the OCNWDAF instance is described in the OCNWDAF profile stored in the NRF. The consumer NFs that need specific analytics types query the NRF and include the Analytics ID based on the required data.

1.2 References

For more information about OCNWDAF, refer to the following documents:

- *Oracle Communications Networks Data Analytics Function Solution Guide*
- *Oracle Communications Networks Data Analytics Function Installation and Fault Recovery Guide*
- *Oracle Communications Networks Data Analytics Function Troubleshooting Guide*
- *3GPP Technical Specification 29.520, 5G System Network Data Analytics Services*
- *3GPP Technical Specification 23.288, Architecture enhancements for 5G System (5GS) to support Network Data Analytics Services*
- *3GPP Technical Specification 29.508, 5G System Session Management Event Exposure Services*
- *3GPP Technical Specification 29.510, 5G System Network Function Repository Services*
- *3GPP Technical Specification 29.518, 5G System Access and Mobility Management Services*

2

OCNWDAF Architecture

This chapter describes the OCNWDAFs detailed design and architecture.


2.1 Oracle Communications Networks Data Analytics Function Architecture

OCNWDAF comprises of various microservices deployed in a Kubernetes based Cloud Native Environment (CNE, example: OCCNE). The environment provides some common services such as logs or metrics data collection, analysis, graphs or charts visualization, and so on. The OCNWDAF uses standard interfaces from the Service Based Architecture (SBA) to collect data through subscription or request model from other network functions.

The microservices integrate with the environment and provide the necessary data.

The OCNWDAF architecture is depicted in the diagram below:

Figure 2-1 OCNWDAF Architecture

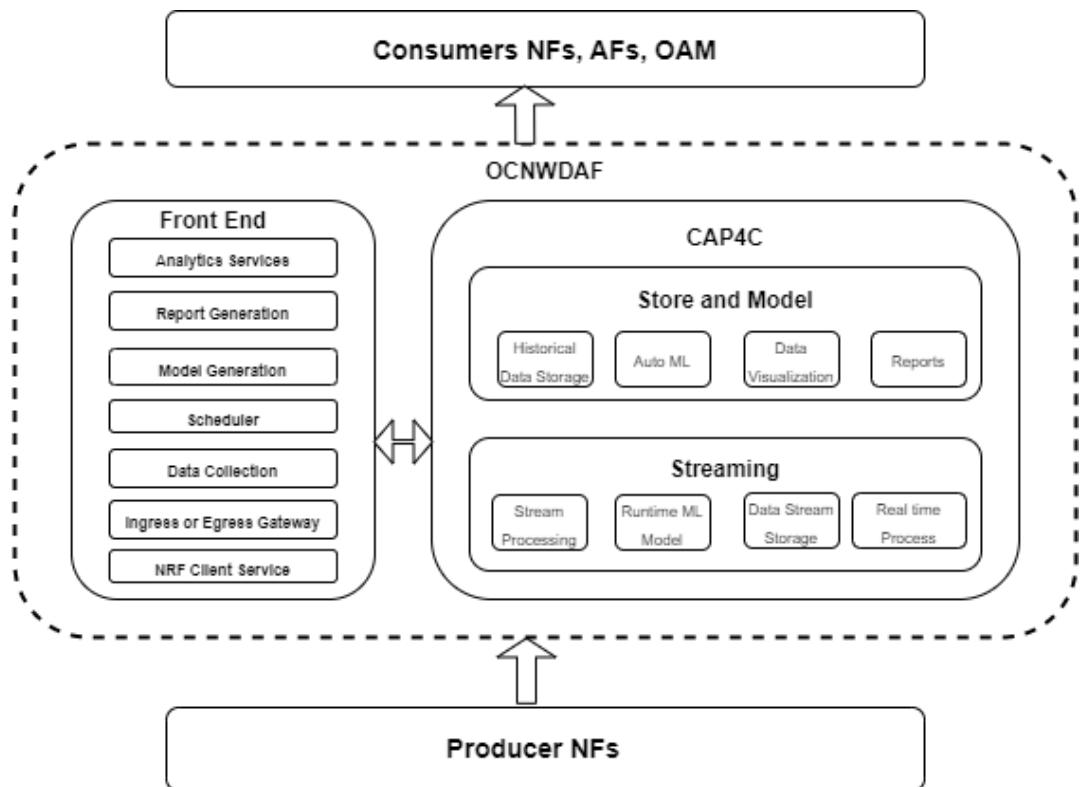

OCNWDAF Front End

- Collects data from 5G NFs

- Provides the data to backend CAP4C
- Collects the processed analytics information from CAP4C
- Provides the analytics information to the consumer NFs and AFs


Converged Analytics Platform for Communication (CAP4C)

- Processes data from the Front End (FE)
- Examines streaming data in real time to enable thresholding and other uses
- Implements OCNWDAF analytics information (Statistical, Predictive, and Abnormal Behavior)
- Automates machine learning models
- Provides visualization and reports

2.2 Oracle Communications Networks Data Analytics Function Design

The following diagram depicts the detailed design of OCNWDAF:

Figure 2-2 OCNWDAF Design

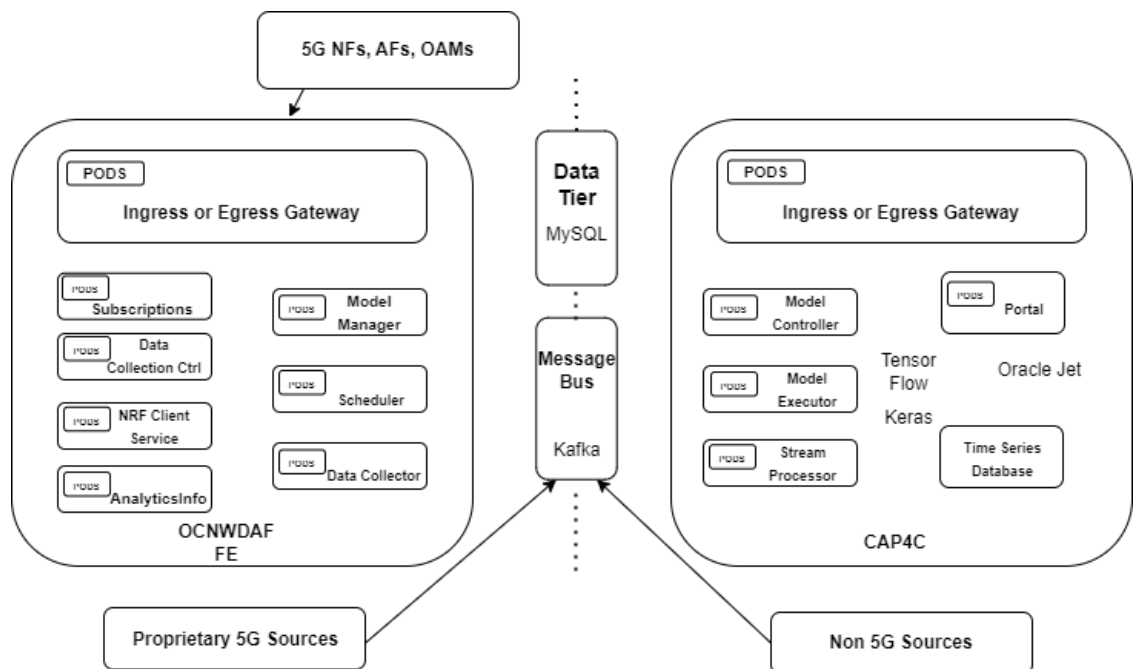

The OCNWDAF current architecture is aligned with 3GPP Release 16 but supports some common features in Release 17 such as Slice Load Level Analytics, Network Performance Analytics, NF Load Analytics, and so on.

OCNWDAF Front End

The Front End (FE) interacts with 5G NFs to gather information. The OCNWDAF interacts with 5G NFs through the Service Based Architecture (SBA) or Service Based Interface (SBI) as defined in 3GPP TS 23.288 and TS 29.520.

Described below are the specialized OC-NWDAF microservices:

Note

Some common services are also described below. The common services can be used by other 5G NFs along with OCNWDAF.

Ingress Gateway

This microservice is an entry point for accessing OCNWDAF supported service operations and provides the functionality of an OAuth validator.

Egress Gateway

This microservice is responsible to route OCNWDAF initiated egress messages to other NFs.

For more information on Ingress and Egress Gateway, see *Oracle Communications Cloud Native Core, Cloud Native Environment User Guide*.

Scheduler

Offers scheduling services for timed events such as periodic consumer report notifications.

Model Manager

- Tracks the consumer analytics requests, timeframe, and data items required within the training data set to the respective ML models.
- Sends requests of models to be trained to the CAP4C and tracks the ML models that CAP4C builds.

Analytics Subscription Service

Enables service consumers to subscribe or unsubscribe to different analytics from the OCNWDAF. It handles all the subscription requests from the consumers and updates or cancels the subscription requests from the consumers. The network analytics subscription service sends analytics information notifications to the NFs, AFs, and OAM when the subscribed event occurs in the network.

Analytics Information Service

This service enables consumers to request and obtain different analytics information from the OCNWDAF based on the 3GPP defined AnalyticsInfo API. This service is based on the REST API request-response model. The network analytics information service handles the request for analytics based on the AnalyticsID. The service responds to the request and provides the analytics information if the requested analytics are available.

Data Collection Service

For 3GPP 5G sources, the Data Collection service enables the OCNWDAF to retrieve data from various sources (for example, NFs such as AMF and SMF), this data is used for computation of network analytics. The Data Collection Service ensures the OCNWDAF efficiently obtains the appropriate data with the proper granularity.

The Data Collection Controller and Data Collector microservices together form the Data Collection Service of the OCNWDAF. Data is collected to generate predictive and descriptive analytics based on analyticsID. The OCNWDAF subscribes to (or cancels subscription) a Event ID (or set of Event IDs) by invoking the *Nnf_EventExposure_Subscribe* (or *Nnf_EventExposure_Unsubscribe*) service operation. If OCNWDAF subscribes to a Event ID (or set of EventIDs), the NFs notify the OCNWDAF by invoking *Nnf_EventExposure_Notify* service operation. For example, the NFs can notify the OCNWDAF with a event report.

- **Data Collection Control Service:** This service interacts with producer NFs to manage their subscriptions. This service also monitors and updates the consumers subscription information.
- **Data Collector Service:** This service receives data from the producer NFs and streams data to the CAP4C Analytics Engine.

NRF Client Service

Integrates with NRF for OCNWDAF registration, discovery, and service status or load related information, along with application and performance information services. NRF discovery helps in the on-demand discovery of network functions. NRF management helps in the autonomous discovery of network functions.

Converged Analytics Platform for Communication (CAP4C)

The Analytics Engine (CAP4C) is the core of OCNWDAF, which supports data collection through the Front End (FE) module. The data collected is processed with the help of ML models. Predictive or descriptive data analysis is performed and data is transmitted through real-time stream processing.

Listed below are the OCNWDAF specific microservices (along with the common microservices):

- **Ingress and Egress Gateways:** They are used in the OCNWDAF Front End (FE).
- **DBTier MySQL database:** Is used for general configuration, storage of microservice data (including dynamic state data) and ML models. Some specialized reports are also generated using the DBTier.
- **Time-Series database:** This database is based on MySQL cluster and emulates time-series to optimize data access and data elimination. It stores all the time-series data used for statistical reports and ML model datasets. Supports data roll-up (such as 1 up to 5 minute samples, 5 up to 15-minute samples, 15 minutes up to an hour sample and so on), allowing the storage of much older data in an efficient manner. Allows for fast and efficient data culling.
- **Kafka:** A reliable and scalable distributed event streaming platform. It is used for internal as well as external delivery and consumption of data and events. It exports special measurements and events to external consumers. It also imports measurements and events from operator sources such as a messaging bus and data lake.
- **Stream Processors:** Cleans, merges, and splits data as required and examines data in windows to detect threshold crossings or perform complex calculations.
- **Model Controller:** Receives model generation or execution requests from the OCNWDAF FE. The Model Controller manages and directs work to the Executor pool.
- **Model Executor:** Is a variable pool of resources that trains or executes models.
- **OCNWDAF Portal:** Performs the following functions:
 - Manages the OCNWDAF dashboards
 - Provides visualization of analytics information

3

OCNWDAF Features

This section explains the OCNWDAF features.

3.1 Automated Test Suite Support

OCNWDAF provides Automated Test Suite (ATS) for validating the functionalities. ATS allows you to run OCNWDAF test cases using an automated testing tool, and then compares the actual results with the expected or predicted results. In this process, there is minimal user intervention.

For more information on installing and configuring ATS, see *Oracle Communications Network Analytics Suite Automated Test Suite Guide*.


3.2 Support for Georedundancy

Overview

A network comprises of multiple sites, and each site can be located at different data centres and can be spread across geographic locations. Georedundancy is data replication of one site across multiple sites to efficiently handle failure scenarios and ensure High Availability (HA). A network failure can occur due to reasons such as network outages, software defects, hardware issues, and so on. These failures impact the continuity of network services. Georedundancy is used to mitigate such network failures and ensure service continuity in a network. In a georedundant deployment, when a failure occurs at one site, an alternate site takes ownership of all the subscriptions and activities of the failed site. The alternate site ensures consistent data flow, service continuity, and minimal performance loss.

Georedundant Deployment Architecture

The OCNWDAF supports both 2-site and 3-site georedundant deployments. The following diagram depicts a 3-site georedundant deployment.

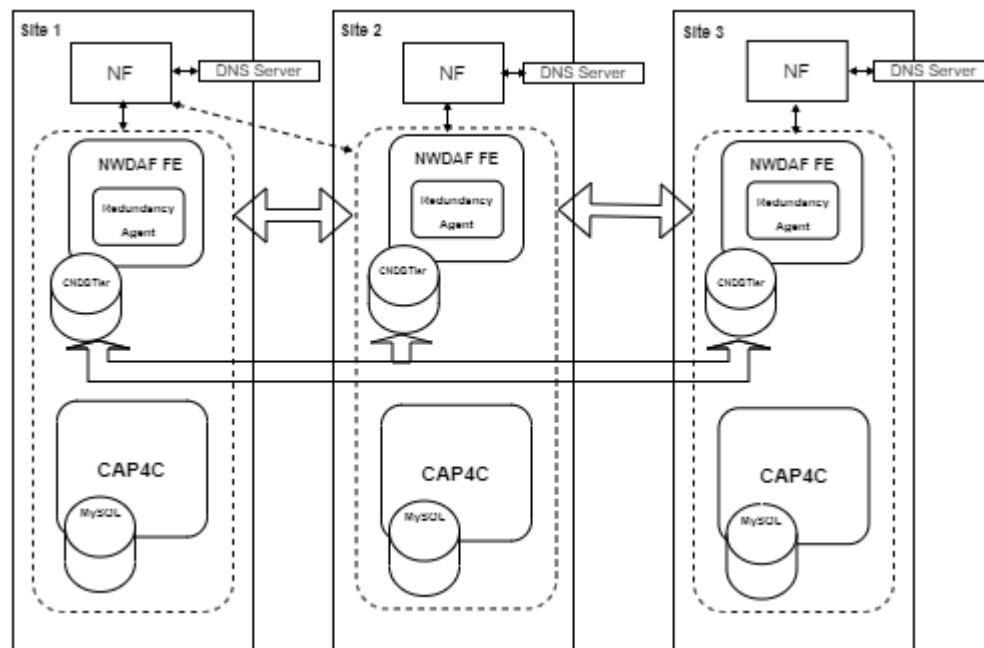Figure 3-1 Georedundant Architecture**Redundancy agent**

Redundancy Agent is the microservice introduced to maintain communication and enable site transfer between the mated sites. It uses a heartbeat mechanism to broadcast the liveness of a site and receives liveness updates from mated sites.

Site transfer is based on the configured priority of the mated sites. The redundancy agent of every site maintains a priority list of the mated sites. The priority list is configured using the Helm chart. A site can access the priority list of other sites using the DB and build the ownership matrix. When a site failure occurs at the primary site, the ownership is transferred to the secondary site. If the secondary site fails, the ownership is transferred to the tertiary site and so on. Identifying and recognizing a failed site is based on a quorum, where a majority of active sites agree on the failed status of the site.

An NF sends a subscription request to the Analytics Subscription Service. The subscription service verifies if the subscription exists and if it is a new subscription, it stores the subscription data and the Site ID. The Redundancy agent accordingly responds with a status to the subscription service. If the status is ACTIVE, the Analytics Subscription Service continues with the subscription request. If the Analytics Subscription Service receives any other status, it responds to the subscription request with an HTTP 5XX response. The subscription service updates and maintains site status based on the response received by the Redundancy agent. If a subscription request is received from a NF when the site is down, the transfer of responsibility to mated site is addressed by the Redundancy Agents, the request is forwarded to the site which is currently handling all the subscription requests of the site which is down. If a core component failure occurs, the Redundancy Agent intimates the Subscription Service, the Subscription Service caches the data sent by Redundancy Agent, and further this data is referred by Subscription Service while accepting fresh subscriptions. The Analytics Information Service also operates like the Analytics Subscription Service. The Redundancy Agent provides the site liveness data to the Data Collection Service when there is a change in the core component status, the Data Collection Service caches the data sent by Redundancy Agent, and further this data is referred by Data Collection Service while accepting fresh data collection requests.

Prerequisites

- Each site configures the remote OCNWDAF sites that it shall be georedundant with.
- The DB replication service must be in good health.
- Georedundant sites must be time synchronized.
- Georedundant OCNWDAF sites must be reachable from NFs from all three sites.
- The NFs register their services and maintain heartbeats with the OCNWDAF. The data is replicated across the georedundant OCNWDAFs, thereby allowing the NFs to seamlessly move between the OCNWDAFs in case of failure.
- The configurations at each site shall be the same to allow the OCNWDAFs at all sites to handle the subscriber NFs in the same manner.
- This feature is configured using HELM.

Georedundant Deployment Failure Scenarios

Listed below are possible failure scenarios in georedundant deployments and the respective failure recovery mechanisms to prevent network failures:

Table 3-1 Failure Scenarios

Failure Scenario	Failure Recovery
One of the mated OCNWDAF sites is down, and the heartbeat is not exchanged.	The Redundancy Agent updates the ownership matrix and transfers site ownership to the active site based on the existing ownership matrix.
The mated OCNWDAF site is up, but the heartbeat exchange is missed.	Redundancy Agent marks the unresponsive mated site as UNAVAILABLE and after number of heartbeats missed crosses the configured threshold, the Redundancy Agent marks the site as INACTIVE. Transfer of ownership is then initiated based on the priority list.
Heartbeats are exchanged, but the OCNWDAF site is experiencing a core component failure.	In case of core component failure, the redundancy agent uses the K8s client to identify the failure of core components. The Redundancy Agent updates the ownership matrix and transfers site ownership to the active site based on the existing ownership matrix.
cnDBTier Primary Replication Channel Failure, cnDBTier Secondary Replication Channel Failure and cnDBTier Both Replication Channel Failure	cnDBTier takes appropriate action. For more information, see, <i>Oracle Communications Cloud Native Core cnDBTier Installation, Upgrade, and Fault Recovery Guide</i> . Note Transferring ownership in this case may result some data loss.

Table 3-1 (Cont.) Failure Scenarios

Failure Scenario	Failure Recovery
Complete cnDBTier Failure or DB Connection Failure with OCNWDAF.	Redundancy Agent updates the current status of the OCNWDAF site as unavailable/down , updates the ownership matrix, and sends the heartbeat to mated sites. Redundancy Agent determines the status of the DB and takes appropriate action. For more information on cnDBTier recovery, see, <i>Oracle Communications Cloud Native Core cnDBTier Installation, Upgrade, and Fault Recovery Guide</i>
NF unable to send or communicate with local OCNWDAF.	The NF uses the DNS (or SCP Model-D) to obtain the IP of the secondary site which will now be responsible for the current site.


Note

- In case of cnDBTier replication channel failures or complete cnDBTier failure, see, *Oracle Communications Cloud Native Core cnDBTier Installation, Upgrade, and Fault Recovery Guide*
- When one or more core components of an OCNWDAF instance fails, the OCNWDAF instance marks itself as INACTIVE, and broadcasts this message to other mated sites. The mated sites initiate the ownership transfer process.

Two Site Georedundancy

The following diagram depicts a two site georedundant deployment:

Figure 3-2 Two Site Georedundancy

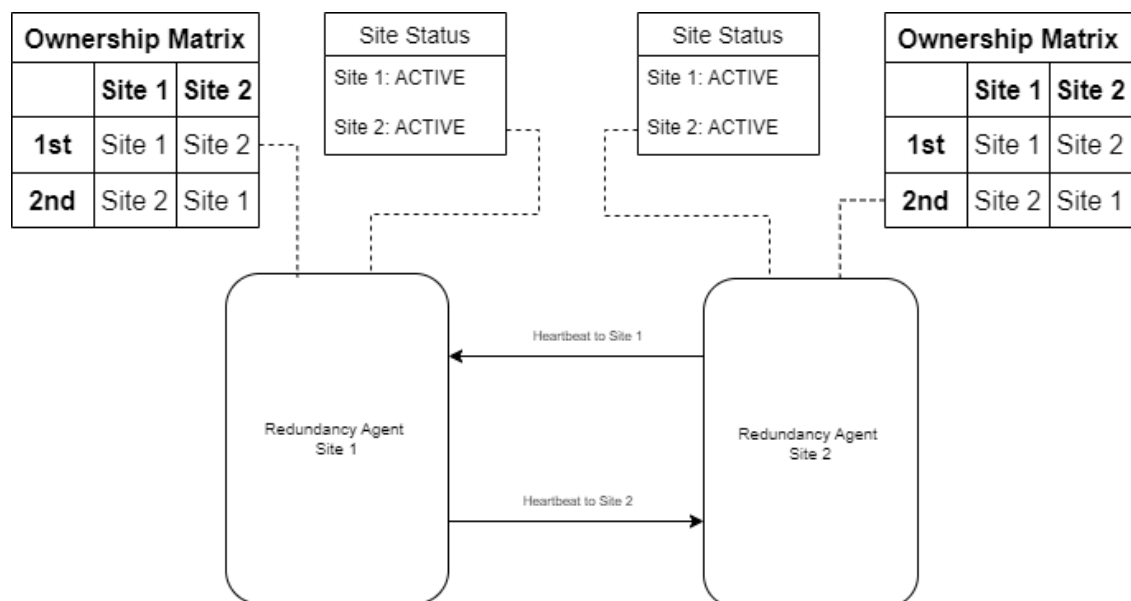


The ownership matrix determines the transfer of ownership when a site failure occurs. The site failure is determined by the site status. The site status can be ACTIVE, INACTIVE, SUSPENDED, DISCOVERY and UNAVAILABLE. The ownership transfer occurs as per the ownership matrix when the site is INACTIVE, SUSPENDED or UNAVAILABLE.

For example, when Site 2 is INACTIVE, based on the ownership matrix Site 1 becomes the owner of all subscriptions owned by Site 2.

Three Site Georedundancy

The following diagram depicts a three site georedundant deployment:

Figure 3-3 Three Site Georedundancy

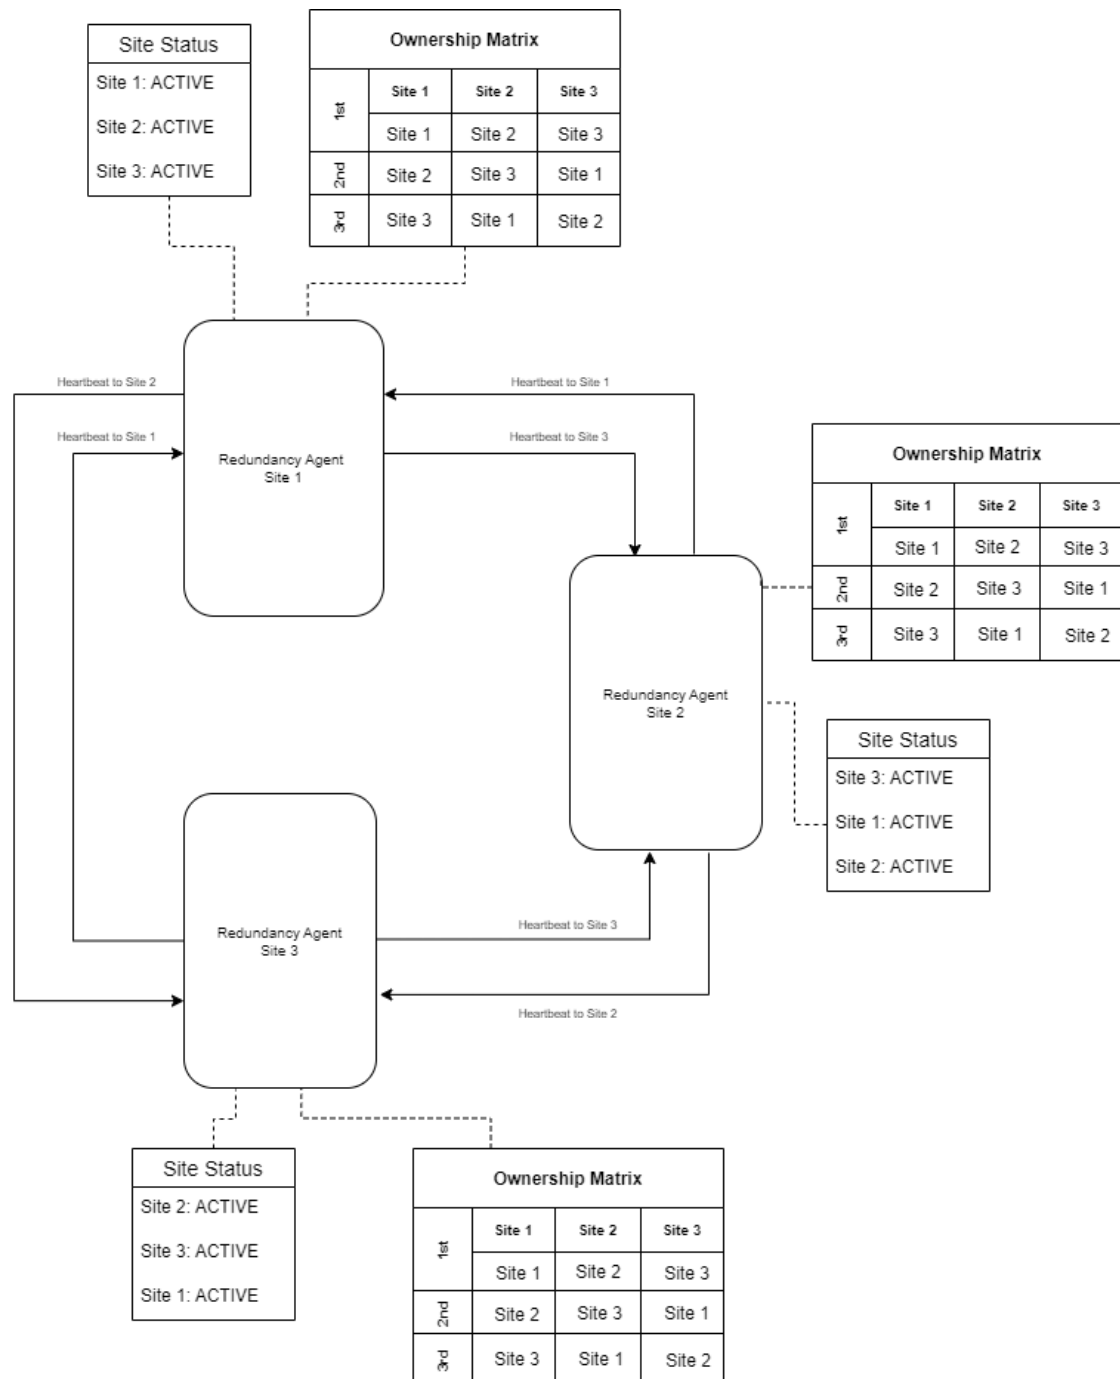

The ownership matrix determines the transfer of ownership when a site failure occurs. The site failure is determined by the site status. The site status can be ACTIVE, INACTIVE, SUSPENDED, DISCOVERY and UNAVAILABLE. The ownership transfer occurs as per the ownership matrix when the site is INACTIVE, SUSPENDED or UNAVAILABLE.

For example, when Site 1 is down, Site 2 takes ownership of the subscriptions at Site 1. If Site 2 is also down Site 3, assumes ownership of subscriptions at Site 1. The transfer of ownership is based on the priority configured in the Ownership Matrix.

Managing Georedundancy

Deploy

To deploy OCNWDAF in a georedundant environment:

- Install cnDBTier version 22.4.0 or above on each configured site. Ensure the DB Replication Channels between the sites are UP. For information about installing cnDBTier, see "Installing cnDBTier" in *Oracle Communications Cloud Native Core cnDBTier Installation, Upgrade, and Fault Recovery Guide*.
- Deploy OCNWDAF over the replicated cnDBTier sites. Ensure the sites have different names. For information about installing and deploying OCNWDAF, see *Oracle Communications Cloud Native Core Networks Data Analytics Function Installation Guide and Fault Recovery Guide*.
- Ensure that the redundancy agent details are added to the common gateway routing rules.

Configure Georedundancy

Configure the georedundancy specific parameters in the OCNWDAF instances on the replicated sites. Configure the following parameters in the redundancy agents properties file to enable and configure georedundancy in the deployed sites:

- Set the **GEO_REDUNDANCY_ENABLE** parameter to true.
- Ensure that the following parameters are properly configured (based on number of georedundant sites in the deployment) in the redundancy agents properties file:
 - **GEO_RED_AGENT_SITE_SECONDARY_SITEID**
 - **GEO_RED_AGENT_SITE_SECONDARY_ADDRESS**
 - **GEO_RED_AGENT_SITE_TERTIARY_SITEID**
 - **GEO_RED_AGENT_SITE_TERTIARY_ADDRESS**
 - **GEO_RED_SITE_SELF_PRIORITY**
 - **GEO_RED_AGENT_SITE_ID**
 - **GEO_RED_AGENT_SELF_ADDRESS**
 - **GEO_RED_AGENT_NUMBER_OF_MATED_SITE**

For example:

```
GEO_RED_AGENT_NUMBER_OF_MATED_SITE: 2
GEO_RED_AGENT_SITE_SECONDARY_SITEID: OCNWDAF-XX-2
GEO_RED_AGENT_SITE_SECONDARY_ADDRESS: http://ocn-nwdaf-gateway-service:8088
GEO_RED_AGENT_SITE_TERTIARY_SITEID: OCNWDAF-XX-3
GEO_RED_AGENT_SITE_TERTIARY_ADDRESS: http://ocn-nwdaf-gateway-service:8088
```

- If the deployment is a two site georedundant deployment the tertiary site is not a part of the georedundant deployment, set a placeholder value. It should not be empty.

- After OCNWDAF instances are deployed over replicated cnDBTier sites, run the following command:

```
helm install {releasename} {chartlocation} -n
{namespace}
```

For example:

```
helm install grdagent charts -n nwdaf
```

Configure the following parameters to enable and configure georedundancy in the custom values file for OCNWDAF:

Table 3-2 REDUNDANCY AGENT CONFIGURATION

Parameter	Description	Default Value
ocnwdafe.cluster.namespace	Name space of the deployment Note: Change this to the name space of OCNWDAF deployments.	ocn-nwdafe
ocnnwdafe.geored.hooks.database	Database information for the hook	nwdafe_subscription
ocnnwdafe.geored.hooks.table	Table information for the hook	nwdafe_subscription
ocnnwdafe.geored.hooks.column1	Column1 information for the hook	record_owner
ocnnwdafe.geored.hooks.column2	Column2 information for the hook	current_owner
ocnnwdafe.geored.hooks.image	Image information for the hook	ocnwdafe-docker.dockerhub-phx.oci.oraclecorp.com/nwdafe-cap4c/nwdafe-cap4c-mysql:8.0.30
ocnnwdafe.geored.agent.name	Name of the deployment	ocn-nwdafe_georedagent
ocnnwdafe.geored.agent.replicas	Number of Replicas	1
ocnnwdafe.geored.agent.image.source	Image for GRD Agent Note: Modify this value if the image is in a different repository.	occne-repo-host:5000/occne/redagent-ms-dev:1.0.31
ocnnwdafe.geored.agent.image.pullPolicy	Image Pull Policy	IfNotPresent
ocnnwdafe.geored.agent.resources.limits.cpu	CPU Limit	1
ocnnwdafe.geored.agent.resources.limits.memory	Memory Limit	1Gi
ocnnwdafe.geored.agent.resources.request.cpu	CPU Request	1
ocnnwdafe.geored.agent.resources.request.memory	Memory Request	1Gi
ocnnwdafe.geored.agent.service.type	Service Type of the Deployment	ClusterIP
ocnnwdafe.geored.agent.service.port.containerPort	Container Port of the Deployment	9181
ocnnwdafe.geored.agent.service.port.targetPort	Target Port of the Deployment	9181

Table 3-2 (Cont.) REDUNDANCY AGENT CONFIGURATION

Parameter	Description	Default Value
ocnnwdaf.geored.agent.service.port.name	Name of the Service Port	ocnnwdafgeoredagentport
ocnnwdaf.geored.agent.service.prometheusport.containerPort	Container Port of the Prometheus	9000
ocnnwdaf.geored.agent.service.prometheusport.targetPort	Target Port of the Prometheus	9000
ocnnwdaf.geored.agent.service.prometheusport.name	Name of the Prometheus Note: Modify the port name based on the prometheus on the deployed setup.	http-cnc-metrics
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_SERVER_HTTP2_ENABLED	Enable/Disable HTTP2	TRUE
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_HEARTBEAT_INTERVAL_MS	Time Interval To check HeartBeat in "ms"	10000
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_HEARTBEAT_THRESHOLD	Number of Time Times to check Heart Beat	5
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_CORE_COMP_THRESHOLD	Number of Time Times to check Heart Beat toward Core Components provides	5
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_SITE_NUMBER	Current Site Number	1
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_SITE_ID	Current Site ID	OCNWDaf-XX-1
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_NUMBER_OF_MATED_SITE	Number of Mated Sites. It is updated based on GRD Sites in sync.	1
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_SELF_ADDRESS	Current Agent Address. The resolvable URL of the OCNWDaf Gateway service. This address should be reachable outside the cluster .	
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_MICROSERVICE_LIVELINESS_MS	Check Interval for OCNWDaf Microservice in "ms".	10000
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_OCNWDaf_CORE_COMPONENT_LIST	List of OCNWDaf microservices that needs to be verified.	ocn-nwdaf-subscription
ocnnwdaf.geored.agent.env.GEO_RED_SITE_SUBSCRIPTION_OWNERSHIP_TRANSFER_URL	Subscription API for Ownership Transfer	http://ocn-nwdaf-subscription-service-internal:8087/nnwdaf-eventssubscription/v1/subscriptions/updateServingOwner
ocnnwdaf.geored.agent.env.GEO_RED_SITE_DATA_COLLECTION_URL	Data Collection API for Ownership Check	http://ocn-nwdaf-data-collection-service-internal:8081/ra/notify

Table 3-2 (Cont.) REDUNDANCY AGENT CONFIGURATION

Parameter	Description	Default Value
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_DBTIER_REPLICATION_STAT US_URL	cnDBTier Monitor Service URL for Replication	Use the Reachable Monitor Service from Deployed CNDB namespace. For example: http://mysql-cluster-db-monitor-svc.{cnbdbnamespace}.svc.{domainname}:8080/db-tier/status/replication
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_DBTIER_STATUS_URL	cnDBTier Monitor Service URL for Local	Use the Reachable Monitor Service from Deployed CNDB namespace. For example: http://mysql-cluster-db-monitor-svc.{cnbdbnamespace}.svc.{domainname}:8080/db-tier/status/local
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_SITE_SECONDARY_SITEID	Secondary Site ID	OCNWD AF-XX-2
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_SITE_SECONDARY_ADDRES S	Secondary Site Address	The Resolvable URL of the OCNWD AF Gateway of Secondary Site. This address should be reachable outside the cluster
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_SITE_TERTIARY_SITEID	Tertiary Site ID	OCNWD AF-XX-3
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_SITE_TERTIARY_ADDRES S	Tertiary Site Address	The Resolvable URL of the OCNWD AF Gateway of Tertiary Site. This address should be reachable outside the cluster
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_DB_URL	IP of the Site cnDBTier	The Cluster IP/ External IP of the CNDB
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_USERNAME	Name of the DB User with privileges to GRD DB and Subscription DB. The user should have access to both GRD and Subscription Databases	occneuser

Table 3-2 (Cont.) REDUNDANCY AGENT CONFIGURATION

Parameter	Description	Default Value
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_PASSWORD	Password for the DB User	password
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_ENABLE	Enable/Disable GRD	false
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_DB_PORT	Port of the DB	3306
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_DB_NAME	Name of the GRD Database	georedagent
ocnnwdaf.geored.agent.env.GEO_RED_AGENT_CONFIG_SERVER	Config Server URL for the Site's OCNWDAF	http://nwdaf-cap4c-spring-cloud-config-server:8888

Procedure to Migrate From Two Site Georedundancy to Three Site Georedundancy

To deploy a tertiary site in a two site georedundant environment, update tertiary site parameters in the redundancy agents properties file.

- Update the parameters **GEO_RED_AGENT_SITE_TERTIARY_SITEID**, **GEO_RED_AGENT_SITE_TERTIARY_ADDRESS**, **GEO_RED_SITE_SELF_PRIORITY** to include the new site in the priority list and the address list for all sites including the existing sites and the new site as well.
- Update **GEO_RED_AGENT_NUMBER_OF_MATED_SITE** parameter in the helm chart to increase the number of mated sites to 3 for all sites.
- Configure and deploy georedundancy service on each site. Run the following command:

```
helm install {releasename} {chartlocation} -n
{namespace}
```

Disable Georedundancy

To disable georedundancy set the **ENABLE_GEO_REDUNDANCY** parameter to false in the redundancy agents properties file.

Remove a OCNWDAF site from a Georedundant Deployment**Prerequisites**

Disable replication on the CNDB MySQL Cluster. For more information see the procedure to Gracefully stop geo-replication in the *Oracle Communications Cloud Native Core cnDBTier User Guide*.

Perform the following steps:

- Remove the OCNWDAF site from the DNS Service List.
- Delete the georedundant service from the site and remove the database from sites CNDB database.
- Remove the site references from other sites and upgrade their Redundancy Agents. For example: If Site 3 is being removed, remove the reference of Site 3 from both Site 1 and Site 2 Redundancy Agents and upgrade the services.

3.3 Service Mesh for Intra-NF Communication

OCNWDAF leverages the service mesh support for all internal and external communication. The service mesh integration provides intra-NF communication and allows API gateway coworking with service mesh. The service mesh integration supports the services by deploying a special sidecar proxy in the environment to intercept all network communication between microservices.

Note

For service mesh integration, the service mesh must be available in the cluster in which OCNWDAF is installed.

For more information about configuring service mesh, see *Oracle Communications Networks Data Analytics Function Installation and Fault Recovery Guide*.

4


OCNWDAF Interfaces

This chapter describes the OCNWDAF interfaces, which are used by consumer NFs and OCNWDAF for subscription data and analytics collection.

4.1 OCNWDAF Data Collection from NFs

The OCNWDAF collects data from 5G NFs (the OCNWDAF and the NF providing the data belong to the same PLMN). The OCNWDAF uses the *NnF* interface for data collection. The figure below depicts the interface:

Figure 4-1 NnF Interface




The OCNWDAF uses the *NnF* interface to:

- Request a subscription for data delivery from a particular context.
- Cancel a subscription for data delivery from a particular context.
- Request a specific data report for a particular context.

4.2 Analytics Collection by a Network Function

A 5G NF can request network analytics information from the OCNWDAF through a *Nnwdaf* interface, where the OCNWDAF and the NF belong to the same PLMN. The diagram below depicts the *Nnwdaf* interface:

Figure 4-2 Nnwdaf Interface



The *Nnwdaf* interface is used to:

- Request subscription to network analytics delivery for a particular context.
- Cancel subscription to network analytics delivery for a particular context.
- Request a specific report of network analytics for a particular context.

5

OCNWDAF Services

This chapter describes the OCNWDAF services.

5.1 Analytics Subscription Service

The Analytics Subscription Service handles the subscription and notification functions in the OCNWDAF. The NF service consumers can subscribe or unsubscribe to the notification for different analytics information from the OCNWDAF through this service. The service is implemented as per 3GPP TS 29.520(v16.11).

The consumer NFs use the APIs for subscribing or unsubscribing and updating the existing subscription for OCNWDAF analytics events. The consumers are notified of the observed events as per the subscription request, and the notification can be:

- **A single notification:** Analytics Subscription Service sends only a single notification and purges the subscription.
- **A periodic notification:** Analytics Subscription Service receives the periodic analytics generated from the Analytics Generation Service as per the notification period specified in the subscription request. A notification is generated for the received analytics data. On receiving this notification, subscriptionId and Notification URI mapping is fetched, notification data is prepared, and a REST call is made to the Notification URI.
- **A specific event notification:** The Analytics Subscription Service processes the subscription request, validates the subscription information, generates the subscriptionID, and stores the subscription request in the subscription database. The Data Collection Service waits for the notification data corresponding to the observed events (such as configured thresholds breached) from the Analytics Generation Service and is invoked by using REST APIs.

The subscription can be for descriptive (KPIs and statistics) and predictive analytics (future event prediction). The subscription data is validated, and requests are stored in the subscription database.

Based on the subscription data, the Analytics Subscription Service intimates the Data Collection Service to gather data corresponding to the subscribed events from one or more NF functions.

The probable consumers of the *NnwdaF_EventsSubscription* service are listed below:

- Policy Control Function (PCF)
- Network Slice Selection Function (NSSF)
- Access and Mobility Management Function (AMF)
- Session Management Function (SMF)
- Network Exposure Function (NEF)
- Application Function (AF)
- Operations, Administration, and Maintenance (OAM)

The *Nnwda* interface is used for communication between the 5G consumers and OCNWDAF in the *Nnwda*_EventsSubscription service.

5.2 Analytics Information Service

The Analytics Information Service enables the consumer NFs to request and get specific analytics from the OCNWDAF. The *nwdaf-analyticsinfo* service manages the functions related to the Analytics Information Service. The service is implemented according to 3GPP TS 29.520(v16.0). Analytics Information Service is a REST API based service.

Note

This service handles only HTTP2 requests.

The Analytics Information Service provides the following kinds of analytics information:

- Descriptive Analytics: If the parameters *startTime* and *endTime* specify a past time, then the request is for the statistics reports.
- Predictive Analytics: If the parameters *startTime* and *endTime* specify a future time, then the request is for the predictive analytics.

The Analytics Information Service provides analytics information corresponding to the Analytics ID in the consumer request.

The probable consumers of the *Nnwda*_AnalyticsInfo service are listed below:

- Policy Control Function (PCF)
- Network Slice Selection Function (NSSF)
- Access and Mobility Management Function (AMF)
- Session Management Function (SMF)
- Network Exposure Function (NEF)
- Application Function (AF)
- Operation, Administration, and Maintenance (OAM)

5.3 Data Collection Service

This service collects data from the sources listed below for different types of analytics:

- Global management data configured by the CSP.
- NFs data available in the 5G network.
- Data available in the individual NFs (for example, UE or UE group information).

The data collected is used as the basis for computing the analytics information. The data collection service handles the NF instance identification for the UEs and raises subscription requests to various NFs for NF data. It also receives notifications from the NFs for the subscribed events. This service enables the OCNWDAF to efficiently obtain appropriate data with the proper granularity. The operator can configure the OCNWDAF to collect analytics information from the NFs for future analytics requests. The operator defines the volume and maximum data storage. If the OCNWDAF has collected sufficient data to provide the requested information, it can skip the data collection procedure. The OCNWDAF can send an error response to the analytics consumer if the requested analytics are not available with the

OCNWDAF. The data collection service retrieves behavior data for individual UEs or groups of UEs and global UE information.

The collected data helps in computing predictive and descriptive analytics based on the AnalyticsID. Following AnalyticsIDs are supported:

- UE Mobility
- Slice Load Level
- Abnormal behavior (unexpected UE location)
- NF Load
- Network Performance

Data Collection Procedure from NFs:

The following call flow depicts the data collection procedure from various NFs:

Figure 5-1 Data Collection from NFs



1. The Data Collection Service enables the OCNWDAF to subscribe or unsubscribe to an Event ID (or a set of Event ID(s)) by invoking the *Nnf_EventExposure_Subscribe* or *Nnf_EventExposure_Unsubscribe* service operation.
2. The NFs notify the OCNWDAF of requested analytics (for example, event report) by invoking the *Nnf_EventExposure_Notify* service operation.

The following event exposure services enable OCNWDAF data collection:

Table 5-1 Exposure Services

Service producer	Service
AMF	Namf_EventExposure
SMF	Nsmf_EventExposure
UDM	Nudm_EventExposure
NEF	Nnef_EventExposure

Table 5-1 (Cont.) Exposure Services

Service producer	Service
NRF	Nnrf_NFDiscovery Nnrf_NFManagement

Data Collection from NRF


The OCNWDAF uses the NRF NF discovery service (*Nnrf_NFDiscovery*) to dynamically discover NF instances and their services in the 5G Core (5GC). This activity can be periodic or based on any specific event in the network. The OCNWDAF also utilizes the NRF MF Management Service (*Nnrf_NFManagement*), *NFStatusSubscribe* (*NFStatusSubscribe*), and *NFStatusNotify* services to obtain information about change in NF status. The information collected by these NRF services is used for obtaining NF Load analytics and maintaining a network map for data collection.

Note

The *Nnrf_NFDiscovery* service is invoked only after *NFStatusSubscribe* service to eliminate race conditions of NF status change after the NRF discovery but before the *NFStatusSubscribe* service.

NRF NFStatusSubscribe Service

The *NFStatusSubscribe* service is used to create an OCNWDAF subscription to the NRF. The OCNWDAF gets notified by the NRF when a specific NF instance profile or set of NF instance profiles are modified or deregistered in the NRF.

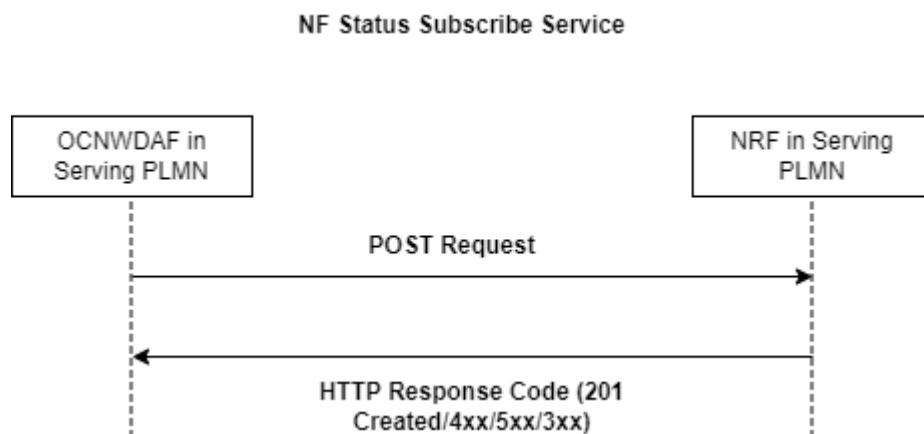Figure 5-2 NF Status Subscribe


1. The OCNWDAF invokes the *NFStatusSubscribe* service to receive notifications about events (such as registration, deregistration, profile change) related to the Target NF located in the same PLMN by a POST request to the NRF.
2. The NRF authorizes or rejects the subscription request based on the validity of attributes in the POST request.

3. If the request is successful, a subscription is created and a HTTP response code "201 Created" is returned to the OCNWDAF.
4. If the request fails an appropriate HTTP response code is returned (4xx, 5xx or 3xx) indicating the reason for the failure.

NRF NFStatusNotify Service

This service operation notifies the OCNWDAF subscribed to NRF about registration (or deregistration) and profile changes of target NF (or NF instances).


Figure 5-3 NF Status Notify

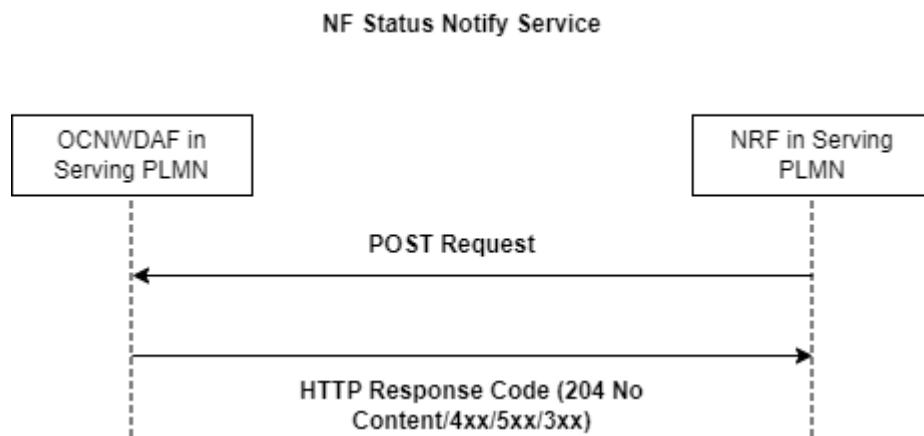

1. The NRF invokes the *NFStatusNotify* service POST request to the subscribed OCNWDAF to indicate any registration or profile changes in the target NF (or NF instances).
2. If the request is successful, the OCNWDAF responds with a "204 No content" HTTP response code.
3. If the request fails an appropriate HTTP response code is returned (4xx, 5xx or 3xx) indicating the reason for the failure.

NRF NFDiscover Service

This service is used to obtain a set of NF instances (represented by their NF profile) that are currently registered with the NRF based on the input query parameters. The results are obtained in the *SearchResult* format. The information obtained is stored for further processing to obtain NF load analytics.

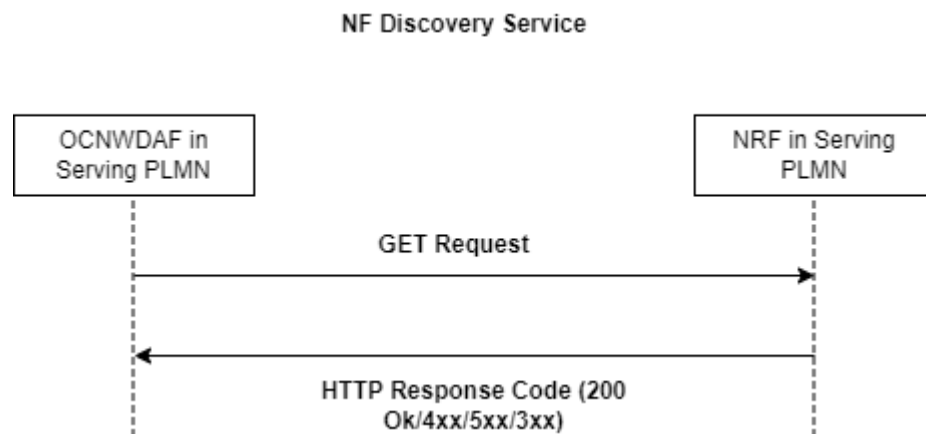
Figure 5-4 NF Discovery Service

1. The OCNWDAF invokes the *NFDiscover* service GET request with query parameter "nf-instances" to the NRF.
2. If the request is successful, the NRF responds with a "200 OK" HTTP code with the response body containing the requested NF profile information based on the request query.
3. If the request fails an appropriate HTTP response code is returned (4xx, 5xx or 3xx) indicating the reason for the failure.

Data Collection from Operations, Administration, and Maintenance (OAM)

The OCNWDAF subscribes to the OAM for the data required to compute analytics information. The OAM processes the request and provides the requested data to the OCNWDAF.

The following call flow depicts the data collection procedure from the OAM:

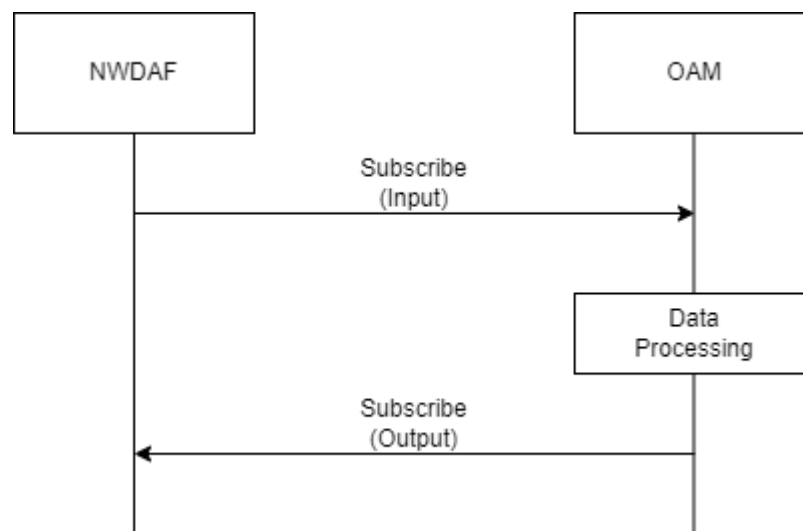Figure 5-5 Data Collection from OAM

1. OCNWDAF subscribes to the notifications related to the services provided by the OAM.

2. Based on the subscription request from OCNWDAF, the OAM performs data processing and prepares the data to be shared with the OCNWDAF.
3. OCNWDAF obtains the requested data from the OAM.

5.4 Analytics Generation Service

The Analytics Generation service facilitates the generation of descriptive and predictive analytics provided by OCNWDAF. The service interfaces with the Data Collection service to obtain the raw data reports collected from different NFs and uses Analytics Engine (CAP4C) for the analytics processing.

In addition, the Analytics Generation service notifies the Analytics Subscription service about the generated analytics and obtains the generated analytics from either DBtier or Time Series Database. The service forms the core of OCNWDAF along with Data Collection and Analytics DB services. It is also responsible for interfacing with CAP4C to provision and fetch the trained ML models from the running Machine Learning Operations (MLOPs) service pipeline.

Also, the Analytics Generation service is responsible for performing features, such as managing subscription level aggregations, unrolling the raw data reports into a simple format, formatting the generated analytics into the OCNWDAF event notification format. In the case of complex descriptive analytics and predictions, the Analytics Generation service uses the backend Analytics Engine (CAP4C) data pipeline.

5.5 Analytics Database Service

The Analytics Database (DB) service communicates with the Analytics Information, Analytics Subscription, Data Collection, and Analytics Generation services for performing the following database operations:

- Storing or updating the analytics data into the analytics database
- Finding and deleting records from the analytics database

6


OCNWDAF Subscription and Analytics Requests

This chapter describes consumer subscription and analytics request procedures.

6.1 Analytics Subscription Request to the OCNWDAF

This section describes how the OCNWDAF service consumers subscribe or unsubscribe to the OCNWDAF to obtain analytics information. The *Nnwdaf_AnalyticsSubscription* service is used to subscribe, unsubscribe, and modify existing subscriptions to the OCNWDAF.


Figure 6-1 OCNWDAF Consumer Subscription Request

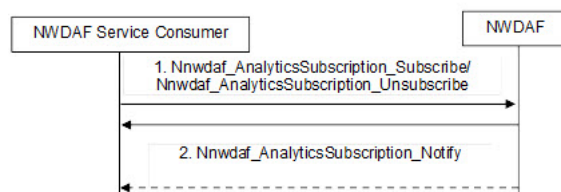

1. The OCNWDAF service consumer initiates or cancels a subscription to analytics information by invoking the *Nnwdaf_AnalyticsSubscription_Subscribe* or *Nnwdaf_AnalyticsSubscription_Unsubscribe* service operation. When a subscription to analytics information is received, the OCNWDAF determines whether triggering data collection is required. If the service invocation is for a subscription modification, the NF service consumer includes an identifier (Subscription Correlation ID) to be modified in the *Nnwdaf_AnalyticsSubscription_Subscribe* request.
2. If the OCNWDAF service consumer subscribes to analytics information, the OCNWDAF notifies the service consumer with the analytics information by invoking the *Nnwdaf_AnalyticsSubscription_Notify* service operation, based on the request from the service consumer, for example, Analytics Reporting Parameters.

6.2 Analytics Information Request to OCNWDAF

This section describes how the OCNWDAF service consumers request and obtain analytics information from the OCNWDAF. The *Nnwdaf_AnalyticsInfo* service is used to request and obtain information from the OCNWDAF.

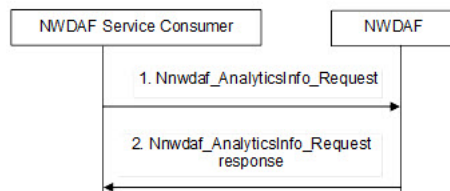Figure 6-2 Analytics Request

1. The OCNWDAF service consumer requests analytics information by invoking the *Nnwdaf_AnalyticsInfo_Request* service operation.
2. On receiving the request, the OCNWDAF determines if a data collection needs to be triggered. If the requested analytics information is not present, it triggers a data collection request.
3. If the OCNWDAF has the requested information, it responds to the consumer with the requested analytics information.

① Note

The consumer sends an HTTP GET request to obtain analytics data based on the query parameter value of the "event-id" attribute. Along with *event-id*, the *ana-req* attribute can be specified. It contains the parameter *timeAnaNeeded*, which sets the time when the analytics information is needed. Once the time specified *timeAnaNeeded* is crossed, the consumer does not need to wait for the analytics information any longer, and the OC-NWDAF sends an error response to the consumer.

6.3 Correlation between Network Data and Service Data

The correlation information from each NF input data helps OCNWDAF correlate data from different NFs. The following table contains correlation information:

① Note

The correlation information is not listed in the input data per network data analytics.

Table 6-1 Correlation between network data and service data

Correlation Information	Description
Timestamp, IP address 5-tuple	To correlate data from AF and from UPF
Timestamp, AN Tunnel Info (Clause 9.3.2.2, 3GPP TS 38.413 [16])	To correlate UPF data and OAM data which are reported by the RAN
Timestamp, UE IP address	To correlate data from UPF and SMF
Timestamp, SUPI	To correlate data from SMF and AMF
Timestamp, SUPI, DNN, S-NSSAI or UE IP address	To correlate data from SMF and PCF

Table 6-1 (Cont.) Correlation between network data and service data

Correlation Information	Description
Timestamp, RAN UE NGAP ID (Clause 9.3.3.2, 3GPP TS 38.413 [16]) and Global RAN Node ID	To correlate AMF data and OAM data reported by the RAN
Timestamp, Application ID, IP filter information	To correlate data from SMF and AF

OCNWDAF Analytics

An OCNWDAF consumer can avail analytics information or reports for various events in the network. The consumers can subscribe (or unsubscribe) to the OCNWDAF to obtain specific analytics reports as a one-time event or periodically get notified when a defined event is detected. The analytics information provided by the OCNWDAF is either statistical information on past events or predictive information which can be used to balance the resources in the network.

The OCNWDAF assists in collecting and analysing data in a 5G network. The OCNWDAF currently supports NFs as data producers but the data consumers can be not only be 5G NFs but AFs and OAM can also be consumers of analytics information. The OCNWDAF allows the Communications Service providers (CSPs) to efficiently monitor, manage, automate, and optimise their network operations by analysing the data collected across the network.

Listed below are the type of analytics reports that OCNWDAF can provide:

- Historical analytics
- Future analytics
- Reports when a thresholds are crossed
- Predictions on network behaviour and resource usage
- Prediction of abnormal events in the network

The Analytics Subscription Service and Analytics Information Service are used for obtaining different analytics reports. The Analytics Subscription Service obtains periodic reports based on future or current events, threshold and abnormal event reports. The Analytics Information Service obtains historic statistical reports and prediction reports.

Analytics Request

A consumer analytics request (subscription or information request) to the OCNWDAF contains the following information:

- Analytics ID(s): Analytics ID identifies the requested type of analytics.
- Analytics Filter Information (optional)
- Target of Analytics Reporting: The target indicates the object(s) for which Analytics information is requested. It includes entities such as a specific UE or a group of UE(s) or all UEs.
- Analytics Reporting Information with the following parameters:
 - In the case of Analytics Subscription requests, event reporting parameters are defined as per 3GPP TS 23.502 (version 3, table 4.15.1-1).
 - In the case of Analytics Subscription requests, Reporting Thresholds are defined, which are the conditions on the level of each requested analytics. When the threshold is crossed, the OCNWDAF notifies the consumer. The specified conditions may include rules like "below", "above", or "crossed". The default rule is "crossed" if no matching rule is provided.
- Analytics target period: Time interval which includes both start and end time (in UTC format). The target period specified can be either the past time or future time.

- An Analytics target period specified in past time is indicative of a analytics statistics request.
- An Analytics target period specified in the future time is indicative of a analytics prediction request.

By setting start time and end time to the same value, the consumer of the analytics can request analytics or subscribe to analytics for a specific time rather than for a time interval.

- Preferred level of accuracy of the analytics (for example, low or high).
- For Analytics Information requests, the time when analytics information is required can be specified. If the time is reached and no analytics are received the consumer does not wait for the analytics information any longer and the OCNWDAF sends an error response to the consumer.
- The maximum number of objects (optional). This specifies the number of objects in a list of analytics for each request.
- Maximum number of SUPIs is an optional parameter that specifies the number of relevant SUPIs in the analytics object to be returned in the analytics response. When this parameter is not specified, the OCNWDAF returns all the relevant SUPIs in the analytics object.

Analytics Report

The OCNWDAF provides the following analytics information to the consumer:

- Analytics information based on specified Analytics ID and target time.
- Notification Correlation Information for Analytics Subscription requests.
- The OCNWDAF provides the following additional information:
 - Timestamp of analytics generation. The analytics consumer can determine the relevance of analytics information based on the timestamp received.
 - Validity period, the time until which the analytics information is valid.
 - Probability assertion: This indicates confidence in the prediction. The confidence is expressed as a value based on definition of parameters "Preferred level of accuracy" and "Analytics Target Period" in the consumer request and the data availability with OCNWDAF. The OCNWDAF returns a value of zero confidence if sufficient data is not collected to match the requested accuracy level within the analytics target time. If the analytics target time is not specified, the OCNWDAF waits till adequate data is collected then provides a response or notification.

Note

Statistical analytics does not contain this parameter as confidence in prediction is not applicable for this type of analytics.

The OCNWDAF provides the following analytics:

- Slice Load level analytics
- UE Mobility analytics
- UE Abnormal Behaviour analytics
- NF Load Level analytics
- Network Performance analytics

7.1 Slice Load Level Analytics


The OCNWDAF provides Slice Load Level analytics to the consumers at the Network Slice level, Network Slice instance level, or both. To generate this analytics report, the OCNWDAF need not have information about the subscribers in the slice, the slice load level analytics information is not subscriber specific. The OCNWDAF notifies slice specific network status analytics information to the subscribed consumers. The Analytics Subscription service and Analytics Information service expose the slice load level analytics to the consumers.

The Analytics ID used for the slice load level information is "SLICE_LOAD_LEVEL"(for Analytics Subscription Service) or "LOAD_LEVEL_INFORMATION" (for Analytics Information Service).

Note

In the current release, only one network instance per slice is supported.

Figure 7-1 Slice Load Level Workflow

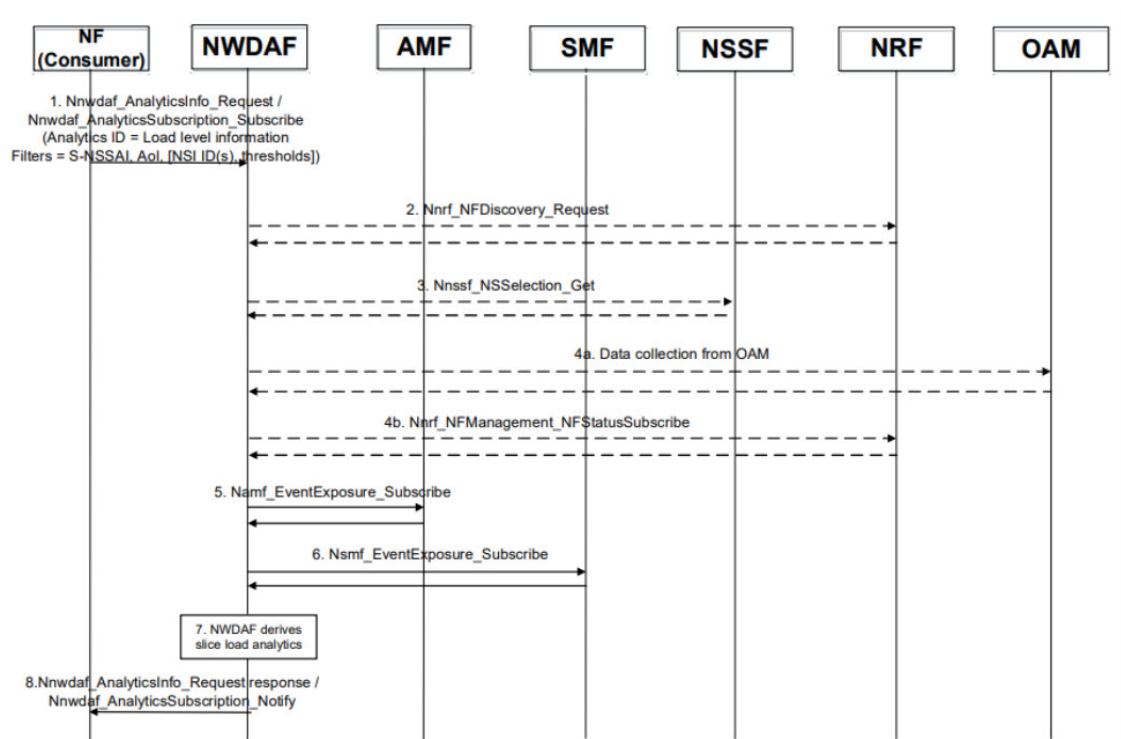

1. A consumer subscribes to an OCNWDAF (*Nnwdaf_AnalyticsSubscription_Subscribe*) or sends a request to an OCNWDAF (*Nnwdaf_AnalyticsInfo_Request*) with the Analytics ID and optional filters such as S-NSSAI, NSI ID, Area of Interest and Load level threshold value. The following steps are optional and applicable only if the nature of the requests matches the criterion listed below:
 - The analytics request received by the OCNWDAF can be for historical or current data. If the OCNWDAF does not have the slice load information and the request is for historical data, it fetches the data from OAM. Suppose the request is for current data

and OCNWDAF does not have the information, it performs an NRF discovery to discover AMF, SMF and NSSF instance(s) to fetch the relevant data based on the analytic filters provided in the analytics subscription service.

- If the consumer NF analytics subscription request does not contain the NSI ID(s), the OCNWDAF invokes a *Nnssf_NSSelection_Get* request to the NSSF to obtain the NSI ID(s) to the corresponding S-NSSAI in the subscription.
 - The OCNWDAF can collect input data from the NRF to derive resource usage statistics and predictions for a Network Slice instance.
2. The OCNWDAF sends a *Namf_EventExposure_Subscribe* request to subscribe to the AMF's event exposure service. The OCNWDAF collects data on the number of UEs currently registered on the specific Network Slice (if the slice is available) and its constituent Network Slice instance(s). It also collects information on UEs access and mobility based on the event ID "UE moving in or out of Area of Interest". If the optional event Filters S-NSSAI, NSI ID(s) (if available), and Area of Interest are provided in the request, the OCNWDAF collects the corresponding UE IDs.
 3. The OCNWDAF subscribes to the SMF's event exposure service to collect data on the number of PDU sessions currently registered on a specific Network Slice (if the slice is available) and its constituent Network Slice instance(s). The PDU session establishment or release event information is collected.
 4. The OCNWDAF derives the slice load analytics and delivers it to the consumers by invoking *OCNWDAF_AnalyticsSubscription_Notify* or *OCNWDAF_AnalyticsInfo_Request* response.

Consumer request to OCNWDAF

A consumer request for Slice Load Level analytics contains:

- Analytics ID: "SLICE_LOAD_LEVEL" (for Analytics Subscription Service) or "LOAD_LEVEL_INFORMATION" (for Analytics Information Service).
- Analytics filter information:
 - S-NSSAI and NSI ID: The S-NSSAI is the network slice identifier. The use of NSI ID in the network is optional and depends on the deployment choices of the operator. If the NSI ID is specified, it is associated with S-NSSAI. The NSI ID is only applicable when the consumer is NSSF.
 - Area of Interest (AoI) (Optional)
 - Load level threshold value
 - List of NF types (Optional)
 - List of analytics subsets (Optional)
 - Maximum number of objects: When the Analytics Filter Information does not include the NSI ID, the "maximum number of objects" indicates the maximum number of Network Slice instances expected in the output. It is an optional parameter.

The OCNWDAF reports when the load level of the network slice instance crosses the threshold value specified in the network analytics subscription service.

The analytics is generated on specified event detection (Network Analytics Information Service) or if the defined threshold is reached (Network Analysis Subscription Service). In this case, the event and threshold are related to the load level in the slice.

Slice Load Level Analytics Report

The following analytics information is obtained:

- Network Slice load statistics
- Network Slice load predictions

The Network Slice load statistics include the following information:

Table 7-1 Network Slice Load statistics

Parameter	Data type	P	Cardinality	Description
Load Level Information	loadLevelInformation	M	1 up to the maximum value	Load level information of the network slice calculated per time period. Load level is based on the maximum number of UEs or sessions that the slice can support and is limited by the maximum configured UEs or sessions. The load level value is the either the value of "Percent UE" or "Percent Session", whichever is the highest.
S-NSSAI	String	M	0 to 1	The S-NSSAI is the network slice identifier. This information is obtained from the analytics request.
Number of UE Registrations	Integer	M	1 up to the maximum value	The number of UE registrations within the Network Slice.
Percent UE	Integer	M	1 up to the maximum value	Is a proprietary value obtained by the percentage of Number of UE registrations in the slice and the configured value of maximum UEs per S-NSSAI.
Number of PDU Sessions	Integer	M	1 up to the maximum value	The number of PDU Sessions established within the Network Slice.

Table 7-1 (Cont.) Network Slice Load statistics

Parameter	Data type	P	Cardinality	Description
Percent Sessions	Integer	M	1 up to the maximum value	Is a proprietary value obtained by the percentage of Number of PDU Sessions in the slice and the configured value of maximum sessions per S-NSSAI.
Exceed Load Level Threshold	Boolean	M	True or False	Is true when the load level threshold is crossed within the time period of the analytics report.

Table 7-2 Type LoadLevelInformation

Type Name	Type Definition	Description
LoadLevelInformation	Integer	Load level information of the network slice

The Network Slice load predictions include the following information:

Table 7-3 Network Slice Load Predictions

Parameter	Data type	P	Cardinality	Description
Load Level Information	loadLevelInformation	M	1 up to the maximum value	Load level information of the network slice calculated per time period. Load level is based on the maximum number of UEs or sessions that the slice can support and is limited by the maximum configured UEs or sessions. The load level value is the either the value of "Percent UE" or "Percent Session", whichever is the highest.
S-NSSAI	String	M	0 to 1	The S-NSSAI is a network slice identifier.

Table 7-3 (Cont.) Network Slice Load Predictions

Parameter	Data type	P	Cardinality	Description
Number of UE Registrations	Integer	M	1 up to the maximum value	The number of UE registrations in the Network Slice.
Percent UE	Integer	M	1 up to the maximum value	Is a proprietary value obtained by the percentage of Number of UE registrations in the slice and the configured value of maximum UEs per S-NSSAI.
Number of PDU Sessions	Integer	M	1 up to the maximum value	The number of PDU Session established in the Network Slice.
Percent Sessions	Integer	M	1 up to the maximum value	Is a proprietary value obtained by the percentage of Number of PDU Sessions in the slice and the configured value of maximum sessions per S-NSSAI.
Exceed Load Level Threshold	Boolean	M	True or False	Is true when the load level threshold is crossed within the time period of the analytics report.
Confidence	UInteger	C	0 to 1	Indicates the confidence of this prediction. It has a value range from Minimum "0" up to Maximum "100".

7.2 UE Related Analytics

OCNWDAF provides the following UE related analytics:

- UE mobility analytics. For more information, see [UE Mobility Analytics](#).
- UE abnormal behavior analytics (unexpected UE location, proprietary geofencing feature). For more information, see [User Equipment \(UE\) Abnormal Behavior Analytics](#).

The OCNWDAF service consumer may request for these analytics separately, or in a combined manner.

7.2.1 UE Mobility Analytics

OCNWDAF provides UE mobility statistical or predictive analytics to allow consumers to do the following:

- Collect UE mobility related information from 5G NFs (such as AMF).
- Perform data analytics on the collected information to obtain UE mobility descriptive or predictive analytics.


① Note

The detailed information collected by the OCNWDAF can be network data from 5GCs.

- UE mobility related network data collected from 5GC is UE location information.

UE Mobility Workflow

Figure 7-2 UE Mobility Workflow

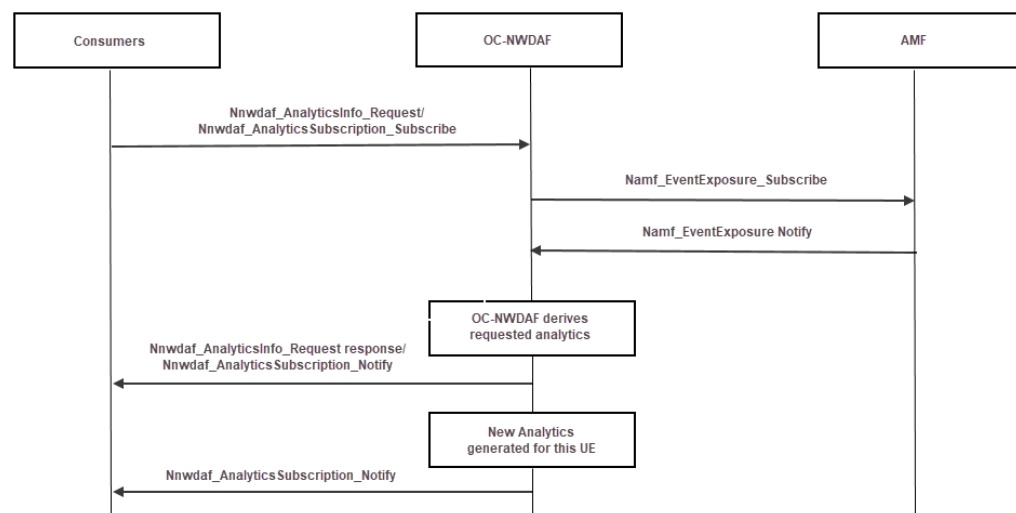

1. The consumer sends a request to OCNWDAF for analytics on a specific UE or a group of UEs, using either the *Nnwdaf_AnalyticsInfo* or the *Nnwdaf_AnalyticsSubscription* service. The consumer can request statistics or predictions or both. The type of analytics is set to UE mobility information. The NF provides the UE ID or Internal Group ID in the Target of Analytics Reporting.
2. If the request is authorized, and in order to provide the requested analytics, OCNWDAF may subscribe to events with all the serving AMFs for notification of location changes.

Note

This step may get skipped when OCNWDAF has the requested analytics available already.

Note

OCNWDAF determines the AMF serving the UE or the group of UEs as described in 3GPP 23.288 6.2.2.1.

3. OCNWDAF derives the requested analytics.
4. OCNWDAF provides the requested UE mobility analytics to the consumer, using either *Nnwdaf_AnalyticsInfo_Request* response or *Nnwdaf_AnalyticsSubscription_Notify*, depending on the service used in step 1.
5. If at step 1, the consumer has subscribed to receive notifications for UE mobility analytics, after receiving event notification from the AMFs subscribed by OCNWDAF in step 2, OCNWDAF may generate new analytics and provide them to the NF.

Consumer Request to OCNWDAF

A consumer request for this analytics information contains:

- Analytics ID: "UE Mobility"
- The following filters can be specified in the subscription request:
 - A single UE or a group of UEs (the Target of analytics reporting)
 - Analytics target period indicating the time period over which the statistics or predictions are requested
 - Preferred level of accuracy of the analytics (low or high)
 - A Notification Correlation ID and Notification Target Address in a subscription

Output UE Mobility Analytics

The following UE mobility analytics information is obtained by OCNWDAF:

- UE mobility descriptive analytics
- UE mobility predictive analytics

The following table lists the UE mobility descriptive analytics:

Table 7-4 UE mobility descriptive analytics

Parameter	Data type	P	Cardinality	Description
Time slot entry	DateTime	O	0 to 1	This attribute identifies the timestamp when the UE arrives at the location.

Table 7-4 (Cont.) UE mobility descriptive analytics

Parameter	Data type	P	Cardinality	Description
Time slot start	ScheduledCommunicationTime	O	0 to 1	Identifies time of the day and day of the week which are valid within the observation period when the UE moves.
Duration	DurationSec	M	1	This attribute identifies the time duration the UE stays in the location. If the analytics result applies for a group of UEs, it indicates the average duration for the group of UEs.
UE location	UserLocation	M	1	This attribute contains the detailed location, the ueLocationTimestamp attribute in the 3GPP access type of UserLocation data type shall not be provided.
UE location Ratio	SamplingRatio	C	0 to 1	Indicates the percentage of UEs in the group (in case of a UE group)

The following table lists the UE mobility predictive analytics:

Table 7-5 UE mobility predictive analytics

Parameter	Data type	P	Cardinality	Description
Time slot entry	DateTime	O	0 to 1	This attribute identifies the timestamp when the UE arrives at the location.
Time slot start	ScheduledCommunicationTime	O	0 to 1	Identifies time of the day and day of the week which are valid within the observation period when the UE moves.

Table 7-5 (Cont.) UE mobility predictive analytics

Parameter	Data type	P	Cardinality	Description
Duration	DurationSec	M	1	This attribute identifies the time duration the UE stays in the location. If the analytics result applies for a group of UEs, it indicates the average duration for the group of UEs.
UE location	UserLocation	M	1	Indicates the predicted location during the analytics target period.
Confidence	UInteger	C	0 to 1	Indicates the confidence of a prediction
Ratio	SamplingRatio	C	0 to 1	Indicates the percentage of UEs in the group (in case of a UE group)

Note

- When the target of analytics reporting is an individual UE, for example, one UE ID (SUPI) is included, OCNWDAF provides the analytics mobility result (list of (predicted) time slots) to the service consumer(s) for the UE.
- The results for UE groups address the group globally. The ratio is the proportion of UEs in the group at a given location at a given time.
- The time slots are provided by order of time, possibly overlapping. The locations are provided by decreasing value of ratio for a given time slot. The sum of all ratios on a given time slot must be equal or less than 100%. Depending on the list size limitation, the least probable locations on a given analytics target period may not be provided.

7.2.2 User Equipment (UE) Abnormal Behavior Analytics

OCNWDAF provides UE abnormal behavior analytics that allow consumers to identify a specific UE or a group of UEs with abnormal behavior.

The UE abnormal behavior analytics consumer subscribes analytics about abnormal behavior from OCNWDAF based on the UE subscription, network configuration, or application layer request.


OCNWDAF performs data analytics on abnormal behavior provided there is a related subscription.

OCNWDAF provides the following types of UE abnormal behavior analytics:

- Unexpected UE location: The UE location is monitored to determine if the UE is an unexpected location.
- Geofencing: Geofences are virtual fences or perimeters around physical locations, they can be used to trigger events when a UE enters or exits the region.

UE Abnormal Behavior Workflow

Figure 7-3 UE Abnormal Behavior Workflow

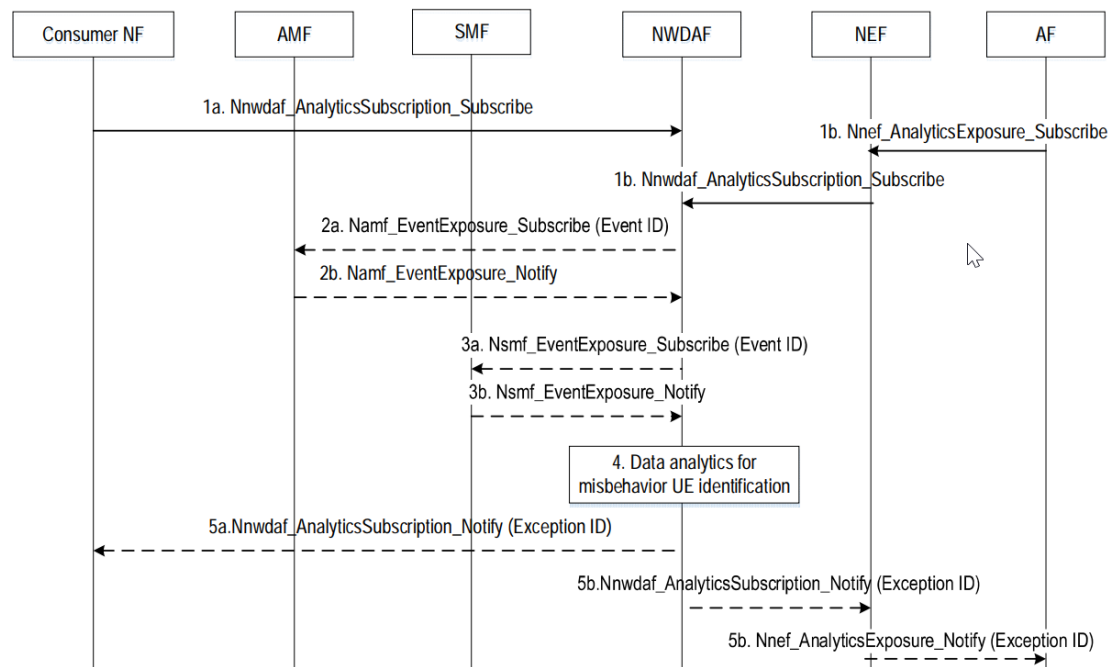

1. a. A consumer subscribes to or requests OCNWDAF using *Nnwdaf_AnalyticsSubscription_Subscribe* or *Nnwdaf_AnalyticsInfo_Request* (Analytics ID set to "Abnormal behavior", Target of Analytics Reporting set to Internal-Group-Identifier, any UE or SUPI, Analytics Filter Information).
A consumer NF may subscribe to or request abnormal behavior notification or response from OCNWDAF for a group of UEs, any UE, or a specific UE. The Analytics ID indicates OCNWDAF to identify misused or hijacked UEs through abnormal behavior analytics.
- b. AF to OCNWDAF: *Nnwdaf_AnalyticsSubscription_Subscribe* or *Nnwdaf_AnalyticsInfo_Request* (Analytics ID, Target of Analytics Reporting set to External-group identifier, any UE or External UE ID, Analytics Filter Information)
For untrusted AFs, the AF sends the subscription through a NEF, where the AF invokes NEF service *Nnef_AnalyticsExposure_Subscribe* or *Nnef_AnalyticsExposure_Fetch* (Analytics ID, Target of Analytics Reporting set to External-group-identifier, any UE or External UE ID, Analytics Filter Information).

An AF may also subscribe to or request abnormal behavior notification or response from OCNWDAF for a group of UEs, a specific UE or any UE, where the subscription or request message may contain expected UE behavior parameters identified on the application layer. If an External-Group-Identifier is provided by the AF, the NEF interrogates UDM to map the External-Group-Identifier to the Internal-Group-Identifier and obtain SUPI list corresponding to the Internal-Group-Identifier.

2. OCNWDAF to AMF: *Namf_EventExposure_Subscribe* (Event ID(s), Event Filter(s), Internal-GroupIdentifier, any UE or SUPI).
OCNWDAF sends subscription requests to the related AMF to collect UE behavioral information if it has not subscribed such data.

Note

OCNWDAF determines the related AMF(s). The AMF sends event reports to OCNWDAF based on the report requirements contained in the subscription request received from OCNWDAF.

If requested by OCNWDAF through Event Filter(s), the AMF checks whether the UE's behavior matches its expected UE behavioral information. In this case, the AMF sends event reports to OCNWDAF only when it detects that the UE's behavior deviated from its expected UE behavior.

3. OCNWDAF performs data analytics for misused or hijacked UEs identification. Based on the analytics and operator's policies, OCNWDAF determines whether to send a notification to the consumer NF or AF.
4. OCNWDAF to consumers (AMF or PCF or SMF depending on the subscription): *Nnwdaf_AnalyticsSubscription_Notify* or *Nnwdaf_AnalyticsInfo_Response* (Analytics ID, Exception ID, Internal-Group-Identifier or SUPI, Exception level) (which is used depending on the service used in step 1a).
If OCNWDAF determines to send a notification or response to the consumer 5G NFs, OCNWDAF invokes *Nnwdaf_EventSubscription_Notify* or *Nnwdaf_AnalyticsInfo_Response* services. Based on the notification or response, the 5G NFs adopt configured actions to resolve, mitigate, or avoid the risks.

Note

- Based on the notification, the AF can adopt corresponding actions, for example, adjusting the recommended TCP Window size and the Service Start and End times.

Consumer request to OCNWDAF

A consumer request for this analytics information contains:

- Analytics ID: "Abnormal Behavior"
- The target of analytics reporting which can be a single "UE" or "any UE"
- Target time period of the request
- Expected UE behavior parameters, these parameters are used to define the geofencing area.
- Expected analytics type
- List of exception IDs: List of exception IDs indicates the specific analytics requested by the consumer.

Note

Expected analytics type and list of Exception IDs are mutually exclusive, only one of them are specified in the request. The following table provides information about the correlation between expected analytics type and exception IDs:

Table 7-6 Expected analytics type and Exception IDs

Expected analytics type	Exception IDs
Mobility	– Unexpected UE location – Geofencing

- The analytics filter should at least include S-NSSAI (if the target of analytics reporting is any UE)
- Area of interest
- Application ID
- DNN
- Optionally, maximum number of objects and maximum number of SUPIs
- Notification Correlation ID and Target Address in the subscription.

UE Geofencing Analytics

Geofences are virtual fences around physical locations. Geofences can be used to trigger events when a UE enters or exits the defined region. Geofences are defined by using the *ExpectedUeBehaviourData* parameter in the analytics request. A proprietary exception ID "UE_GEOFENCE" is defined to obtain geofencing analytics information. On receiving an analytics request from a consumer, the OCNWDAF detects if the UE location is within the fence or outside the fence or if the UE location is unknown, and accordingly the OCNWDAF provides the analytics report to the consumer.

When OCNWDAF detects UEs that deviate from the expected behavior, for example, in case an unexpected UE location or an abnormal traffic pattern is displayed, the OCNWDAF notifies the consumer with [UE Abnormal Behavior Analytics](#).

UE Abnormal Behavior Analytics

The following UE abnormal behavior analytics information is obtained by OCNWDAF:

Table 7-7 UE abnormal behavior analytics

Parameter	Data type	Mandatory or Optional	Cardinality	Description
excep	Exception	M	1	Contains the exception information.
Exception ID	ExceptionId	M	1	Indicates the Exception ID. For analytics related to geofencing, the exception ID is "UE_GEOFENCE"

Table 7-7 (Cont.) UE abnormal behavior analytics

Parameter	Data type	Mandatory or Optional	Cardinality	Description
Exception Level	Integer	O	0 to 1	Measured level, compared to the threshold
Exception trend	ExceptionTrend	O	0 to 1	The supported values are "IN_FENCE", "OUT_FENCE" or "UNKNOWN", based on the UE location with respect to the geofencing area.
GroupId	Array	O	1 up to the maximum value	Indicates the internal group identifier
SUPI list	Array	C	1 up to the maximum value	Indicates the SUPIs of the UEs affected with Exception
Ratio	SamplingRatio	C	0 to 1	Indicates the estimated percentage of the UEs affected by Exception within the target of analytics reporting
sampRatio	SamplingRatio	O	0 to 1	Indicates the estimated number of UEs affected by Exception (applicable when Target of Analytics Reporting = "any UE")
dnn	Dnn	C	0 to 1	Identifies DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only. Shall be present if the "dnns" was provided within EventSubscription during the subscription for event notification procedure.

Table 7-7 (Cont.) UE abnormal behavior analytics

Parameter	Data type	Mandatory or Optional	Cardinality	Description
snssai	Snssai	C	0 to 1	Identifies the network slice information. Shall be present if the "snssais" was provided within EventSubscription during the subscription for event notification procedure.
confidence	UInteger	C	0 to 1	Indicates the confidence of the prediction.

Enumeration ExceptionId

Table 7-8 ExceptionId

Enumeration Value	Description
UNEXPECTED_UE_LOCATION	Unexpected UE location
UE_GEOFENCE	Geofencing

Enumeration ExceptionTrend

Table 7-9 ExceptionTrend

Enumeration Value	Description
IN_FENCE	Indicates the UE is within the defined geofence area.
OUT_FENCE	Indicates the UE is outside the defined geofence area.
UNKNOWN	The location of the UE is unknown.

Type NetworkAreaInfo

Table 7-10 NetworkAreaInfo

Attribute name	Data type	P	Cardinality	Description
ecgis	Array	O	0 to N	Is the list of E-UTRA cell identities.
ncgis	Array	O	0 to N	Is the list of NR cell identities
gRanNodeIds	Array	O	0 to N	Is the list of list of the NG-RAN nodes.

Table 7-10 (Cont.) NetworkAreaInfo

Attribute name	Data type	P	Cardinality	Description
tais	Array	O	0 to N	Is the list of tracking area identities.

Type EventReportingRequirement**Table 7-11 EventReportingRequirement**

Attribute name	Data type	P	Cardinality	Description
accuracy	Accuracy	O	0 to 1	Preferred level of accuracy of the analytics.
startTs	DateTime	O	0 to 1	UTC time indicating the start time of the observation period. The absence of this attribute means subscription at the present time.
endTs	DateTime	O	0 to 1	UTC time indicating the end time of the observation period. The absence of this attribute means subscription at the present time. If provided, it shall not be less than the start time.
sampRatio	SamplingRatio	O	0 to 1	Percentage of sampling (1 up to 100%) among impacted UEs.
maxSupiNbr	UInteger		0 to 1	Represents the maximum number of SUPIs expected in an object. Applicable for the event(s) providing a list of SUPIs during the analytics response.

Table 7-11 (Cont.) EventReportingRequirement

Attribute name	Data type	P	Cardinality	Description
maxObjectNbr	UInteger		0 to 1	Maximum number of objects expected for an analytics report. It's only applicable for the event(s) which may provide more than one entries or objects during event notification.
timeAnaNeeded	DateTime		0 to 1	UTC time indicating the time when analytics information is needed.

Enumeration NotificationMethod**Table 7-12 NotificationMethod**

Enumeration Value	Description
THRESHOLD	OCNWDAF subscription is notified when the defined threshold exceeds.

Enumeration Accuracy**Table 7-13 Accuracy**

Enumeration Value	Description
LOW	Low accuracy
HIGH	High accuracy

Type SamplingRatio**Table 7-14 SamplingRatio**

Name	Definition	Description
SamplingRatio	Integer	Unsigned integer indicating Sampling Ratio , expressed as percentage value from 1 up to 100.


7.3 Network Function (NF) Load Analytics

The OCNWDAF can provide NF load analytics information to the analytics consumer. The analytics generated by OCNWDAF can be either predictive or statistical, based on the type of consumer analytics request.

NF Load Analytics Workflow

The following workflow depicts an analytics consumer request to OCNWDAF for NF load analytics:

Figure 7-4 NF Load Analytics Workflow

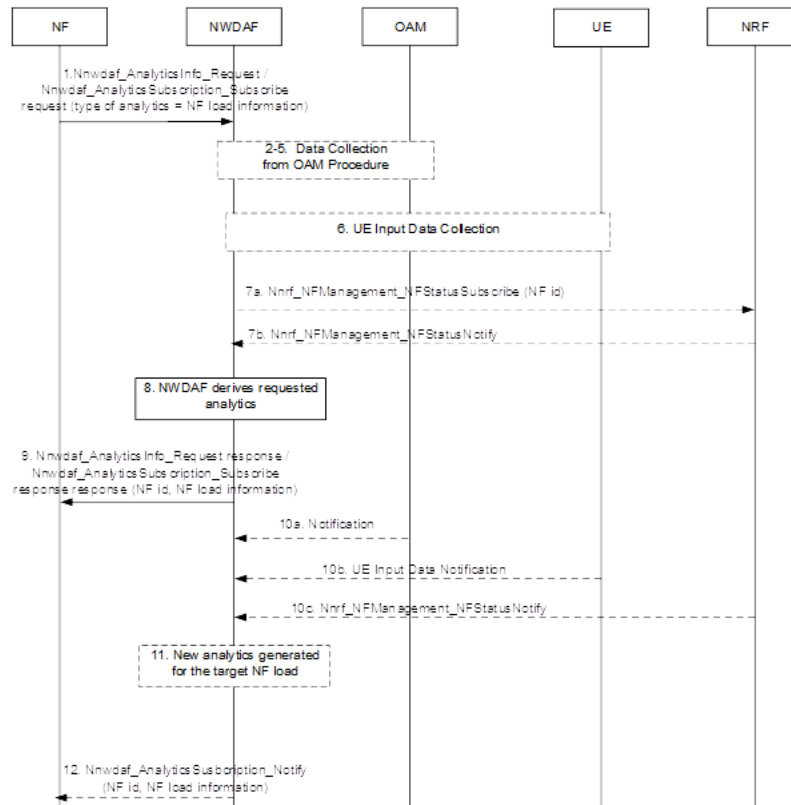

Note

Data collection from OAM is not supported in the current release.

1. The consumer NF sends an analytics request to the OCNWDAF for NF load analytics of a specific NF. The analytics request is either a *Nnwdaf_AnalyticsInfo* or a *Nnwdaf_AnalyticsSubscription* request. The Analytics ID is set to *NF load*, the target for analytics and the analytics filter are also specified in the request. The NF can request statistics or predictions or both and can also provide a time window during which the analytics are generated and shared.
2. The request is authorized and then the OCNWDAF subscribes to the NRF to receive notifications about load and status changes of NF instances identified by the NF ids. The *Nnrf_NFManagement_NFStatusSubscribe* service is used to subscribe for each NF instance.
3. The NRF notifies the OCNWDAF of any changes in the load and status NF instances by using *Nnrf_NFManagement_NFStatusNotify* service.
4. The OCNWDAF derives the requested analytics.

5. The OCNWDAF provides requested NF load analytics to the consumer NF along with the corresponding Validity Period or Area of Interest, using either the *Nnwdaf_AnalyticsInfo_Request* response or *Nnwdaf_AnalyticsSubscription_Subscribe* response, based on the consumer NF request.
6. If the consumer NF request is a subscription request, the OCNWDAF generates new analytics based on the Analytics target period or Reporting Threshold specified in the request. The OCNWDAF receives notifications from the NRF whenever there is a change in the NF load of the target NF, accordingly the OCNWDAF generates new analytics information for the consumer NF.

Consumer request to OCNWDAF

A typical consumer request for NF load analytics consists of the following:

- The analytics ID is set to *NF_Load*.
- The Target of Analytics Reporting : Only "any UE" is currently supported.
- Analytics filter information, consisting of the following:
 - S-NSSAI (optional)
 - Either NF Instance IDs or NF Set IDs or NF types are required. The order of precedence is NF Type, NF Instance ID , and then NF Set ID. If all or any two of them exist in the same request, one with the highest precedence is used.
 - List of analytics subsets (optional)
- Preferred level of accuracy (optional)
- Accuracy level per analytics subset (optional)
- Preferred order of results (ascending or descending) (optional)
- Reporting Threshold (optional)
- Analytics target time
- If the consumer has opted for a subscription, the Notification Correlation Id and the Notification Target Address are included.

NF Load Data Collection

The OCNWDAF collects the following NF data to generate NF load analytics:

Table 7-15 Data Collection

Information Collected	Source	Description
NF Load	NRF	The load of specific NF instances in their NF profile.
NF Status	NRF	The status of specific NF instances. The status can be registered, suspended or not discoverable.

Note

- OCNWDAF can request NRF for data related to NF instances.
- OCNWDAF can correlate the NF resources configuration with NF resource usage for generating the analytics output.

For more information see [Data Collection from NRF](#).

Output NF Load Analytics

The following analytics information is obtained:

- NF load statistics information
- NF load prediction information

The NF load statistics include the following information:

Table 7-16 NF Load Statistics

Parameter	Data Type	P	Cardinality	Description
List of resource status	Integer	M	1 up to the maximum value	List of observed load information for each NF instance along with the corresponding NF id or NF Set ID (as applicable).
NF Type	NFType	M	1	Type of the NF instance.
NF Instance ID	NfInstanceId	M	1	Identification of the NF instance.
NF Set ID	NfSetId	O	0 to 1	Identification of the NF instance set
NF Status	NfStatus	O	0 to 1	The availability status of the NF in the Analytics target period. It is expressed as a percentage of time per status value. The possible values are registered, unregistered, or undiscoverable.
NF resource usage	Integer	C	0 to 1	The average usage of assigned resources (CPU, memory, and disk).
NF load	Integer	C	0 to 1	The average load on the NF instance during the analytics target period.

Table 7-16 (Cont.) NF Load Statistics

Parameter	Data Type	P	Cardinality	Description
NF peak load	Integer	O	0 to 1	The maximum load on the NF instance during the analytics target period.
NF load (per area of interest)	Integer	C	0 to 1	The average load of the NF instances over the area of interest.
S-NSSAI	Snssai	C	0 to 1	Identifies the S-NSSAI.

The NF load prediction include the following information:

Table 7-17 NF Load Statistics

Parameter	Data Type	P	Cardinality	Description
List of resource status	Integer	M	1 up to the maximum value	List of observed load information for each NF instance along with the corresponding NF id or NF Set ID (as applicable).
NF Type	NFType	M	1	Type of the NF instance.
NF Instance ID	NfInstanceId	M	1	Identification of the NF instance.
NF Set ID	NfSetId	O	0 to 1	Identification of the NF instance set
NF Status	NfStatus	O	0 to 1	The availability status of the NF in the Analytics target period. It is expressed as a percentage of time per status value. The possible values are registered, unregistered, or undiscoverable.
NF resource usage	Integer	C	0 to 1	The average usage of assigned resources (CPU, memory, and disk).
NF load	Integer	C	0 to 1	The average load on the NF instance during the analytics target period.

Table 7-17 (Cont.) NF Load Statistics

Parameter	Data Type	P	Cardinality	Description
NF peak load	Integer	O	0 to 1	The maximum load on the NF instance during the analytics target period.
Confidence	Uinteger	C	0 to 1	Indicates the confidence of this prediction.
NF load (per area of interest)	Integer	C	0 to 1	The average load of the NF instances over the area of interest.
S-NSSAI	Snssai	C	0 to 1	Identifies the S-NSSAI.

Enumeration NFType

Table 7-18 NFType

Enumeration Value	Description
"NRF"	Network Function: NRF
"UDM"	Network Function: UDM
"AMF"	Network Function: AMF
"SMF"	Network Function: SMF
"AUSF"	Network Function: AUSF
"NEF"	Network Function: NEF
"PCF"	Network Function: PCF
"SMSF"	Network Function: SMSF
"NSSF"	Network Function: NSSF
"UDR"	Network Function: UDR
"LMF"	Network Function: LMF
"GMLC"	Network Function: GMLC
"5G_EIR"	Network Function: 5G-EIR
"SEPP"	Network Entity: SEPP
"UPF"	Network Function: UPF
"N3IWF"	Network Function and Entity: N3IWF
"AF"	Network Function: AF
"UDSF"	Network Function: UDSF
"BSF"	Network Function: BSF
"CHF"	Network Function: CHF
"NWDAF"	Network Function: NWDAF
"PCSCF"	Network Function: P-CSCF
"CBCF"	Network Function: CBCF
"UCMF"	Network Function: UCMF
"HSS"	Network Function: HSS
"SOR_AF"	Network Function: SOR-AF

Table 7-18 (Cont.) NFType

Enumeration Value	Description
"SPAF"	Network Function: SP-AF
"MME"	Network Function: MME
"SCSAS"	Network Function: SCS/AS
"SCEF"	Network Function: SCEF
"SCP"	Network Entity: SCP
"NSSAAF"	Network Function: NSSAAF
"ICSCF"	Network Function: I-CSCF
"SCSCF"	Network Function: S-CSCF
"DRA"	Network Function: DRA
"IMS_AS"	Network Function: IMS-AS
"AANF"	Network Function: AANF
"5G_DDNMF"	Network Function: 5G DDNMF
"NSACF"	Network Function: NSACF
"MFAF"	Network Function: MFAF
"EASDF"	Network Function: EASDF
"DCCF"	Network Function: DCCF
"MB_SMF"	Network Function: MB-SMF
"TSCTSF"	Network Function: TSCTSF
"ADRF"	Network Function: ADRF
"GBA_BSF"	Network Function: GBA BSF
"CEF"	Network Function: CEF
"MB_UPF"	Network Function: MB-UPF
"NSWOF"	Network Function: NSWOF
"PKMF"	Network Function: PKMF
"MNPF"	Network Function: MNPF
"SMS_GMSC"	Network Function: SMS-GMSC
"SMS_IWMSC"	Network Function: SMS-IWMSC
"MBSF"	Network Function: MBSF
"MBSTF"	Network Function: MBSTF
"PANF"	Network Function: PANF

Type NfInstanceId

Table 7-19 NfInstanceId

Type Name	Type Definition	Description
NfInstanceId	String	String uniquely identifying a NF instance. The format of the NF Instance ID shall be a Universally Unique Identifier (UUID) version 4, as described in IETF RFC 4122 [15].

Type NfSetId

Table 7-20 NfSetId

Type Name	Type Definition	Description
NfSetId	String	NF Set Identifier. Formatted as below: set<SetID>.<nftype>set.5gc .mnc<MNC>.mcc<MCC> or set<SetID>.<NFType>set.5gc .nid<NID>.mnc<MNC>.mcc<MCC> > Example: setxyz.smfset.5gc.mnc012.mcc345

Type NfStatus

Table 7-21 NfStatus

Attribute name	Data type	P	Cardinality	Description
statusRegistered	SamplingRatio	C	0 to 1	Percentage of time with status "registered"
statusUnregistered	SamplingRatio	C	0 to 1	Percentage of time with status "unregistered"
statusUndiscoverable	SamplingRatio	C	0 to 1	Percentage of time with status "undiscoverable"

Note

The total of status values should be equal or lower than 100%. At least one value is provided.

Type Snssai

Table 7-22 Snssai

Attribute name	Data type	P	Cardinality	Description
sst	UInteger	M	1	Represents the Slice or Service Type. It indicates the expected Network Slice behavior in terms of features and services. The allowed range is 0 to 255.

Table 7-22 (Cont.) Snsai

Attribute name	Data type	P	Cardinality	Description
sd	String	O	0 to 1	Represents the Slice Differentiator in the 3-octet string format.

7.4 Network Performance Analytics


Overview

The OCNWDAF provides network Performance analytics to the consumer. It includes information about resource consumption by the gNodeB (gNB), a key component in the 5G Radio Access Network (RAN), as well as key mobility performance indicators in the Area of Interest (AoI). The gNodeB is a base station in the 5G network. The Network Performance analytics provides information such as gNB status, gNB resource usage, communication, and mobility performance in the Area of Interest (AoI). It also provides statistics or predictions on the number of UEs in that AoI. The OCNWDAF can provide predictive or statistical analytics based on consumer requests.

Network Performance Analytics Workflow

The following diagram depicts the workflow of an analytics consumer request to OCNWDAF for Network Performance analytics:

Figure 7-5 Network Performance Analytics

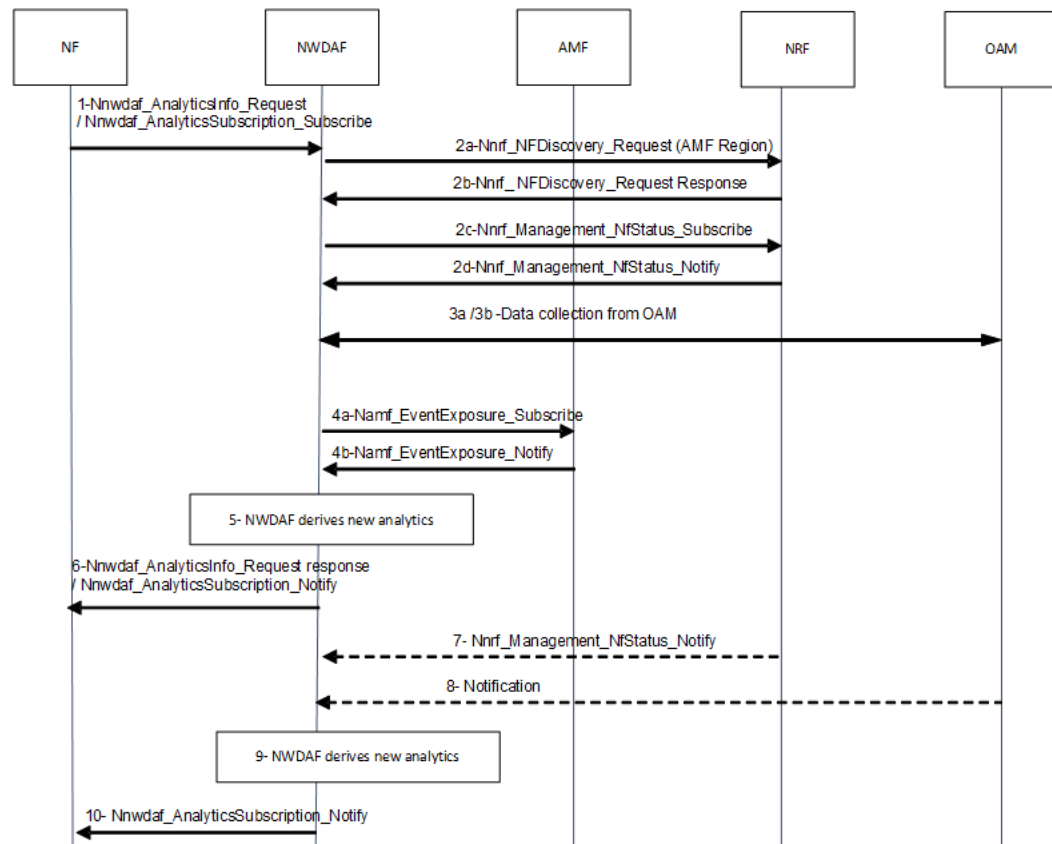

1. The analytics consumer sends an analytics request to the OCNWDAF for Network Performance analytics. The analytics request is either an analytics subscription request (*Nnwdaf_AnalyticsSubscription_Subscribe*) or an analytics information request (*Nnwdaf_AnalyticsInfo_Request*). In the request, the Analytics ID is set to *Network Performance*. The request also specifies the target of analytics reporting, the filter (*Area of Interest*), reporting thresholds, and the analytics target period.
2. The OCNWDAF sends a discovery request to the NRF to obtain information about the AMFs present in the AMF region of the Area of Interest (AoI). The OCNWDAF subscribes to the NRF to get the NF load and status information about these AMFs.
3. The OCNWDAF subscribes to the OAM services to get the status, load, and resource usage information of the AoI.
4. The OCNWDAF collects information about the number of UEs in the Area of Interest from the AMF using *Namf_EventExposure_Subscribe* service and the Target of Event Reporting specified in the analytics request.
5. The OCNWDAF derives the analytics information and sends either a *Nnwdaf_AnalyticsSubscription_Notify* or *Nnwdaf_AnalyticsInfo_Request response* to the analytics consumer.
6. The OCNWDAF is notified about any change in the network performance, such as a change in gNB status, gNB resource usage, communication, and mobility performance in the AoI during the specified target period. The OAM detects the changes or changes in the NF load is reported by the NRF.

7. The OCNWDAF derives analytics based on the most recently collected data.
8. The OCNWDAF uses the *Nnwda_AnalyticsSubscription_Notify* to notify the analytics consumer about changes in the analytics information during the specified analytics target period or when reporting thresholds are breached.

Consumer Request to OCNWDAF

A consumer request for Network Performance analytics contains the following information:

- The analytics ID is set to *Network Performance*.
- The Target of Analytics Reporting: This can be a UE or internal group identifier of a group for which the analytics information is required. The group contains the UEs that are located in the Area of Interest during the time specified in the Analytics target period. The target of analytics reporting is set to "any UE" by default.
- Analytics filter information consisting of the following:
 - Area of Interest (a list of TA or Cells) specifying the focus area. This parameter is mandatory if the Target of Analytics Reporting parameter is set to "any UE". Providing the filter information is optional if the Target of Analytics Reporting parameter is set to any other value.
 - Subset of analytics (optional)
- Reporting threshold (optional)
- Analytics target period, the period for which the statistics or predictions are required.
- Maximum number of objects (optional)
- In an analytics subscription request, the Notification Correlation Id and the Notification Target Address are included.

Request Parameters

Listed below are the parameters in the network performance analytics request:

Table 7-23 Request Parameters

Parameter	Data Type	Presence	Description
eventSubscriptions	array(EventSubscription)	M	Specifies the subscribed event. The event parameter within the subscription is set to "NETWORK_PERFORMANCE".

Table 7-23 (Cont.) Request Parameters

Parameter	Data Type	Presence	Description
evtReq	ReportingInformation	O	Represents the reporting requirements of the event subscription. If this parameter is not provided, the default values for <i>ReportingInformation</i> is used. The notification method "notifMethod" within <i>ReportingInformation</i> takes precedence over the <i>notificationMethod</i> within <i>EventSubscription</i> .
notificationURI	Uri	C	The URI to which OCNWDAF sends the reports.
eventNotifications	array(EventNotification)	C	Notifications about individual events. This parameter is present if the immediate reporting indication in the "immRep" attribute within the "evtReq" attribute is set to true in the event subscription and the reports are available. This parameter is provided in response to the OCNWDAF subscription if <i>immediatereport</i> is true and the reports are available.
failEventReports	array(FailureEventInfo)	O	This parameter is provided by the OCNWDAF. When this parameter is available, it contains the event(s) for which the subscription is not successful, it also includes the failure reason(s). This parameter is populated and returned in the response for the error case.
consNfInfo	ConsumerNfInformation	O	Represents the analytics consumer NF information.

Table 7-23 (Cont.) Request Parameters

Parameter	Data Type	Presence	Description
notifCorrid	String	M	Notification correlation identifier. It is generated after a successful subscription and is returned in the response.
supportedFeatures	SupportedFeatures	C	This parameter is provided by the NF service consumer in the POST request for creating an OCNWDAF Event Subscription resource, and it is also provided in response to the corresponding request.

Note

For a complete list of request parameters see, [Network Performance Analytics APIs](#).

Note

The data types supported by OCNWDAF comply with the 3GPP specifications. For more information about the 3GPP data types, see *3GPP Technical Specification 29.520, Release 17, Network Data Analytics Services*.

Network Performance Data Collection

The OCNWDAF requires resource utilization and RAN status of the gNBs to generate Network Performance analytics. It also requires PDU session and UE Handover information. This information is obtained from OAM. The Network Performance ID also requires information on the number of UEs from the AMF. The OCNWDAF collects the needed information from the following sources to generate Network Performance analytics:

Table 7-24 Data Collection

Information Collected	Source	Description
gNodeB Resource Utilization (CPU, Memory, Storage)	OAM	Radio resource utilization information.
RAN Status	OAM	The status of the RAN.
PDU Session Success and Failure	OAM	Success or failure information of PDU sessions.
UE Handover Success and Failure	OAM	Success or failure information of UE handovers.
Number of UEs	AMF	Number of UEs in Area Report.

For more information see, [Data Collection from Operations, Administration, and Maintenance \(OAM\)](#)

Output Network Performance Analytics

The following types of analytics information is obtained:

- Network Performance statistics
- Network Performance predictions

The predictive analysis has an additional parameter, "Confidence", which indicates the accuracy of the prediction.

Table 7-25 Network Performance Analytics

Parameter	Data Type	Presence	Description
event	NwdafEvent	M	Event that is notified.
start	DateTime	O	UTC time indicating the start time of the observation period. The absence of this attribute means subscription at present time.
expiry	DateTime	O	It defines the expiration time after which the analytics information will become invalid.
timeStampGen	DateTime	O	It defines the timestamp of analytics generation.
nwPerfs	array (NetworkPerfInfo)	C	The network performance information.

Type NetworkPerfInfo

Table 7-26 NetworkPerfInfo

Attribute Name	Data type	P	Description
networkArea	NetworkAreaInfo	M	The network area to which the subscription applies.
nwPerfType	NetworkPerfType	M	The type of network performance.
relativeRatio	SamplingRatio	O	The reported relative ratio expressed in percentage. Either the relativeRatio or absoluteNum is provided.
absoluteNum	UInteger	O	The reported absolute number.

Table 7-26 (Cont.) NetworkPerfInfo

Attribute Name	Data type	P	Description
confidence	UInteger	C	Indicates the confidence of the prediction. If sufficient data is unavailable during the specified analytics target time interval, the confidence value returned is "0".

Enumeration NetworkPerfType

Table 7-27 NetworkPerfType

Enumeration value	Description
GNB_ACTIVE_RATIO	Indicates the ratio of active gNBs (up and running) to the total number of gNBs.
GNB_COMPUTING_USAGE	Indicates the gNodeBs computing resource usage.
GNB_MEMORY_USAGE	Indicates gNodeBs memory usage.
GNB_DISK_USAGE	Indicates gNodeBs disk usage.
NUM_OF_UE	Indicates the number of UEs.
SESS_SUCC_RATIO	Indicates the ratio of the successful PDU session setups to the total PDU session setup attempts.
HO_SUCC_RATIO	Indicates the ratio of successful handovers to the total handover attempts.

Note

The data types supported by OCNWDAF comply with the 3GPP specifications. For more information about the 3GPP data types, see *3GPP Technical Specification 29.520, Release 17, Network Data Analytics Services*.

8

Configuring OCNWDAF Using CNC Console

This chapter describes how to configure different global and service parameters in Oracle Communications Networks Data Analytics Function (OCNWDAF) using the CNC Console application. OCNWDAF provides a console interface using the highly secure GUI service, which allows you to use an interactive interface for interacting with the other OCNWDAF services.

8.1 OCNWDAF GUI Login

The OCNWDAF Graphical User Interface (GUI) can be accessed only after logging in to the CNC Console application. Before proceeding, ensure that the CNC Console is installed. For more information, see "Installing OCNWDAF GUI" section of *Oracle Communications Networks Data Analytics Function Installation and Fault Recovery Guide*.

Before logging in to the CNC Console application, create a user name and password. For more information on user name creation, see "Configuring CNC Console IAM" section in *Cloud Native Configuration Console User Guide*.

Using these login credentials, you can log in to the CNC Console.


1. Open a web browser and enter the URL: `http://cncc-core-ingressgateway.cncc.svc.cluster.local:port number/` and press **Enter**.

Note

port number is the `cncc-iam-ingress-port` number.

The login page opens.

Figure 8-1 CNC Console Login

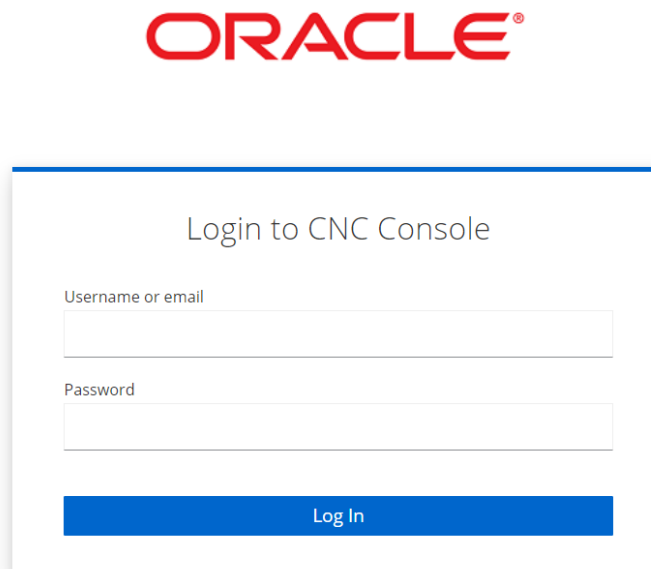

ORACLE®

Login to CNC Console

Username or email

Password

Log In

2. Enter the **Username** and **Password**.
3. Click **Log In**.
4. On the Console home page, select OCNWDAF instance from the **Please Select Instance** drop-down field.


On a new browser tab, the [Slice Load Monitoring](#) page appears.

8.2 Slice Load Monitoring

The **Slice Load Monitoring** screen displays the overview of the network and allows the user to perform the following actions:


- **Search:** A search bar is available with option to select the following filters:
 - **Tracking Area**
 - **Region**
 - **Date Range**
- **Logout**
- See **Slice Load Monitoring Threshold** information.
- Obtain **NF Load Monitoring** information
- Obtain **Geofence Monitoring** information
- Access the **Configuration** screen (only if the user has NWDAF_WRITE access).

The following **Slice Load Monitoring** screen is visible to the Network Operator:

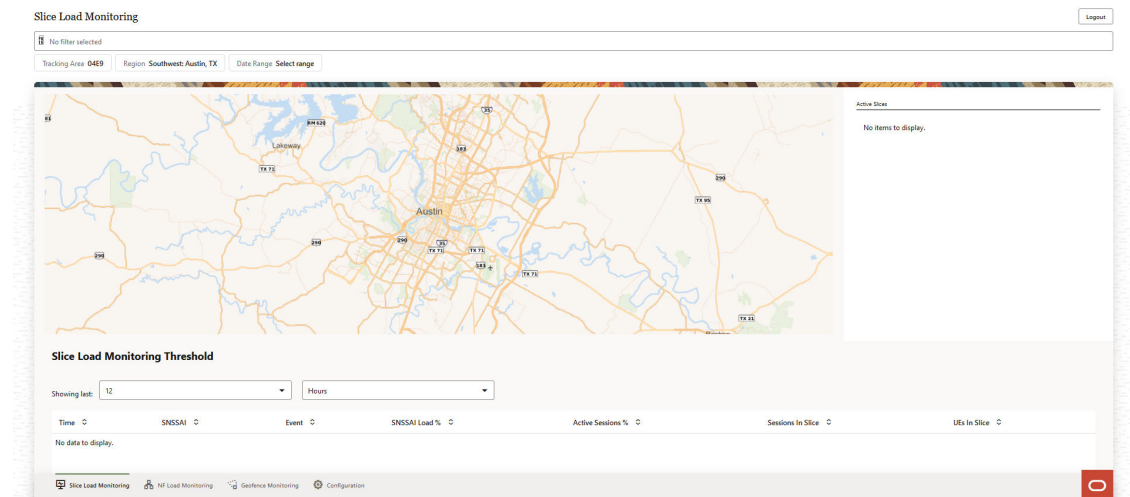Figure 8-2 Slice Load Monitoring

8.3 Slice Load Monitoring

Click the **Slice Load Monitoring** button, the following screen displays:

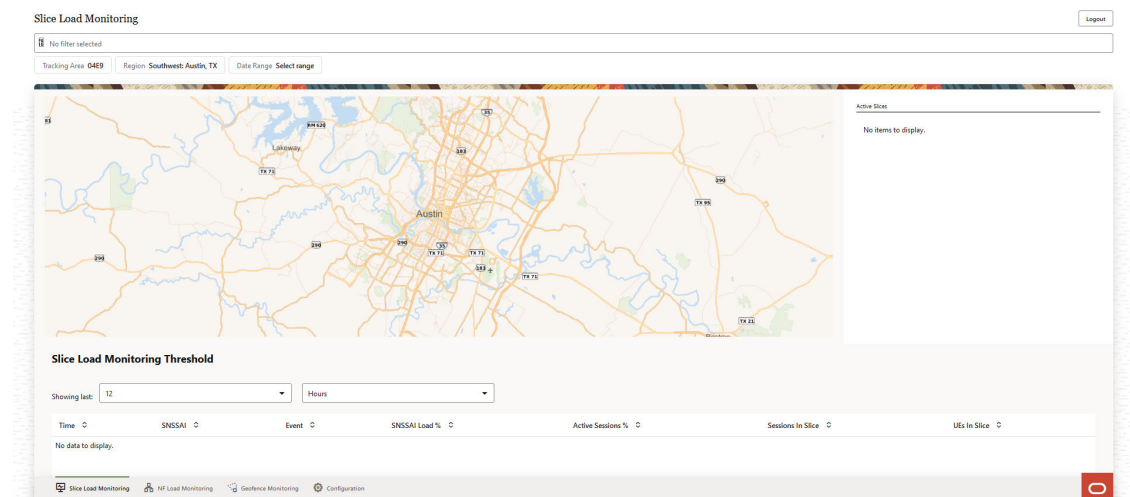Figure 8-3 Slice Load Monitoring

The **Slice Load Monitoring** screen displays the following slice information:

- Active Slices
- The user can see the slice load information during a specified time duration. The time duration can be selected from the **Showing last** drop down list.
- Slice Load Monitoring Threshold information about the active slices:
 - Time
 - SNSSAI

- Event
- SNSSAI Load %
- Active Sessions %
- UEs In Slice
- Sessions In Slice

8.4 NF Load Monitoring

Click the **NF Load Monitoring** button, the following screen appears:

Figure 8-4 NF Load Monitoring




The **NF Load Monitoring** screen lists the following information:

- Peak Load Values
- Average Load Values

Use the **Showing last** option to provide the number of previous NF loads information to be displayed on the screen.

8.5 Geofence Monitoring

Click the **Geofence Monitoring** button, the following screen displays:

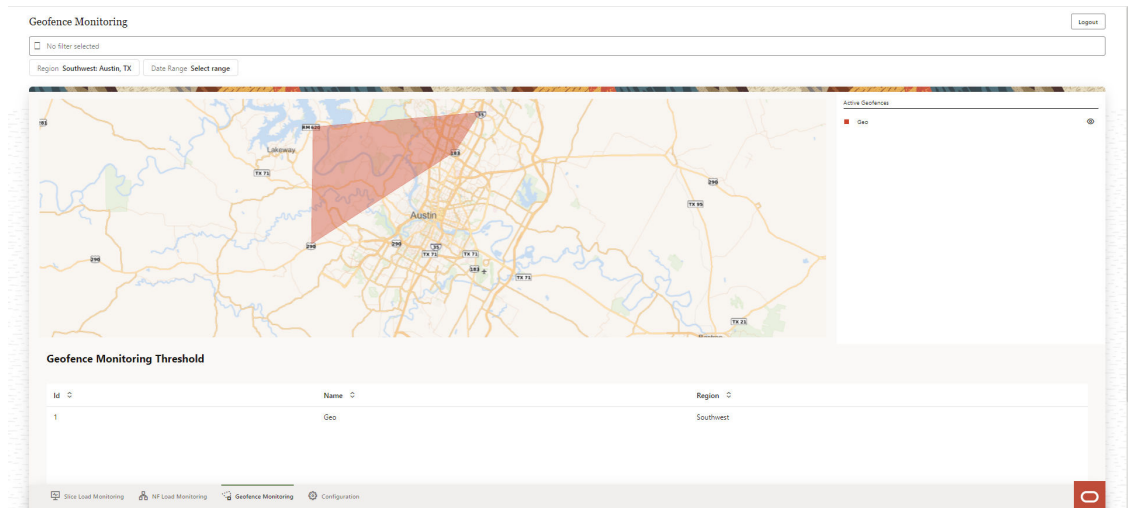Figure 8-5 Geofence Monitoring

The **Geofence Monitoring** screen displays the following geofence information:


- Active Geofences
- Geofence Monitoring Threshold information about the active geofences:
 - Id
 - Name
 - Region

8.6 OCNWDAF Configuration Page

To open the **Configuration** page, click **Configuration** button at the bottom of the **Slice Load Monitoring** page.

Note

Access to the **Configuration** button in the **Slice Load Monitoring** page is available only when the user has NWDAF_WRITE access.

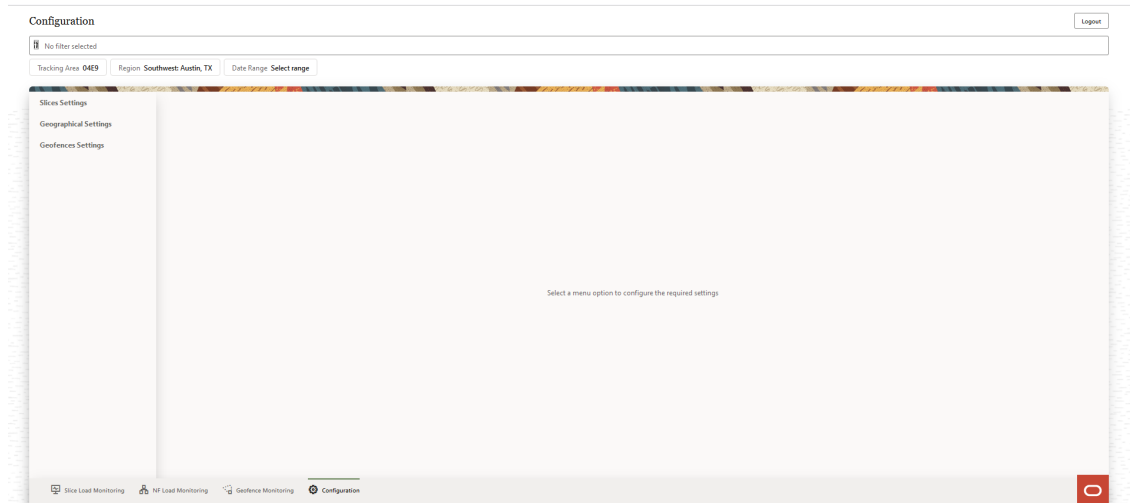
Figure 8-6 Configuration

The user can perform the following actions through the **Configuration** page:

- Access the [Slice Settings](#)
- Access the [Geographical Settings](#)
- Access the [Geofence Settings](#)
- **Logout**
- Perform a search using the **Search** bar, by applying the following filters:
 - **Tracking Area**
 - **Region**
 - **Date Range**

8.6.1 Slices Setting Screen

The **Configuration** screen displays the **Slices Settings** option. Click on the **Slices Settings** button, the following screen appears:

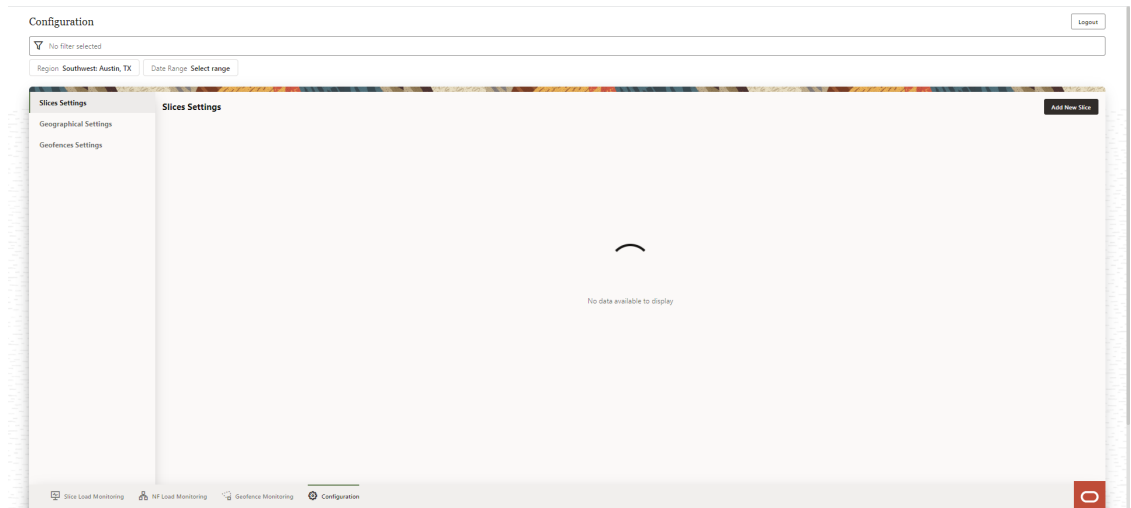
Figure 8-7 Slices Settings

The user can perform the following actions on the **Slices Settings** screen:

- [Add New Slice](#)
- View the configured slices and the following slice parameters:
 - **Time**
 - **S-NSSAI**
 - **S-NSSAI Load %**
 - **Active Sessions %**
 - **Sessions In Slice**
 - **UEs In Slice**
- Modify existing slice information using the [Edit Value](#) button. This button appears as a pop up on clicking the three dot menu option on the right side of each configured slice listed on the screen.
- Delete an existing slice, using the [Delete](#) button. This button appears as a pop up on clicking the three dot menu option on the right side of each configured slice listed on the screen.

8.6.1.1 Add a New Slice

To add a new slice, click **Add New Slice** button in the **Slices Settings** screen. A form with the fields to add a new slice "**Add Slice**", appears on the right side of the screen:

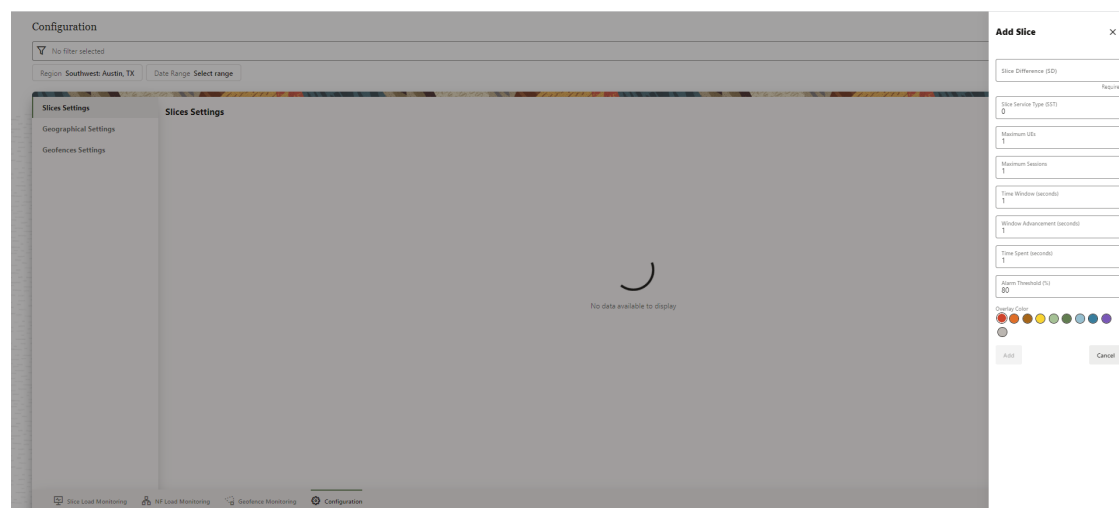Figure 8-8 Add Slice

Provide the following information to create a new slice:

Table 8-1 New Slice

Parameter	Type	Description
Slice Difference (SD)	String	Is a hexadecimal number (up to 6 characters) to identify different slices of the same type.
Slice Service Type (SST)	Unsigned integer	Value: 0 up to 127 is standardized, and 128 up to 255 is operator specific.
Maximum UEs	Integer	The maximum number of user equipments allowed in the slice.
Maximum Sessions	Integer	The maximum number of sessions allowed in the slice.
Time Window	Seconds	Threshold detection window time. Default: 5 minutes.
Window Advancement	Seconds	Threshold detection window advancement. Default: 15 seconds.
Time Spent	Seconds	Time spent in window opposite accepted state.
Overlay Color	Color	Select a display color for the slice.

Click the **Add** button after entering all the fields to create a new slice. The new slice will be listed in the **Slices Settings** screen.

8.6.1.2 Edit an Existing Slice

To edit a slice, click dotted menu button on the right side of the slice to be edited. Click the **Edit value** option that appears as a pop up on the screen.

The **Edit Slice** form appears on the right side of the screen.

Modify the required fields to edit the slice. Click **Save** to apply the changes to the slice.

8.6.1.3 Delete a Slice

To delete a slice, click the three dot menu button on the right side of the slice to be deleted. A pop up appears which has an option to **Delete** slice.


Click **Delete**, a Delete Slice confirmation dialog box appears on the screen. Click **Delete** to confirm deletion or **Cancel** to cancel slice deletion.

After the slice is successfully deleted, a **Success** message appears on the screen.

8.6.2 Geographical Settings

The **Configuration** screen displays the **Geographical Settings** option. Click on the **Geographical Settings** option on the left side of the screen. The **Geographical Settings** screen appears.


Figure 8-9 Geographical Settings

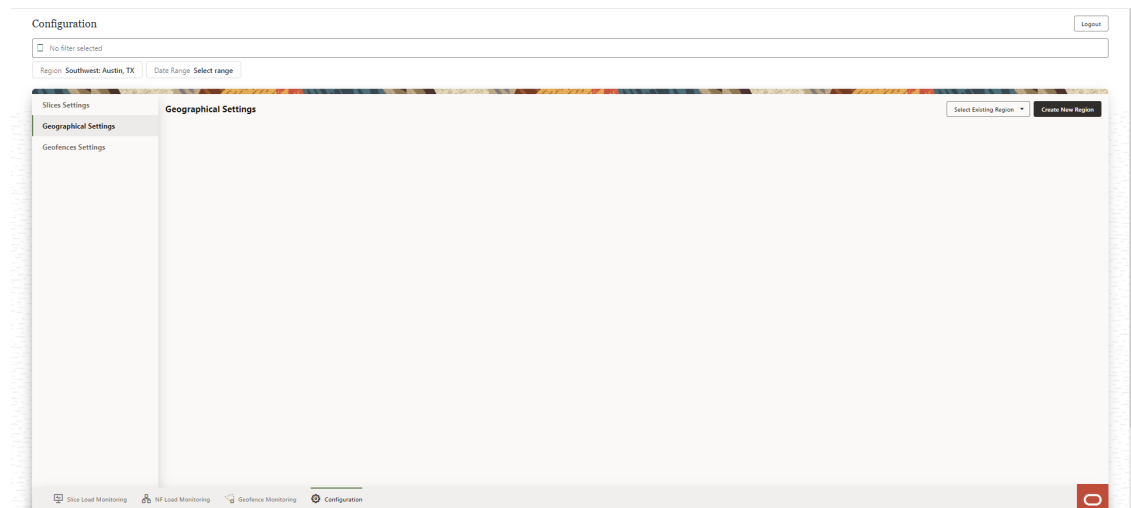

Use this screen to [Select Existing Region](#) or [Create New Region](#).

8.6.2.1 Create New Region


Click **Create New Region** to create a new region.

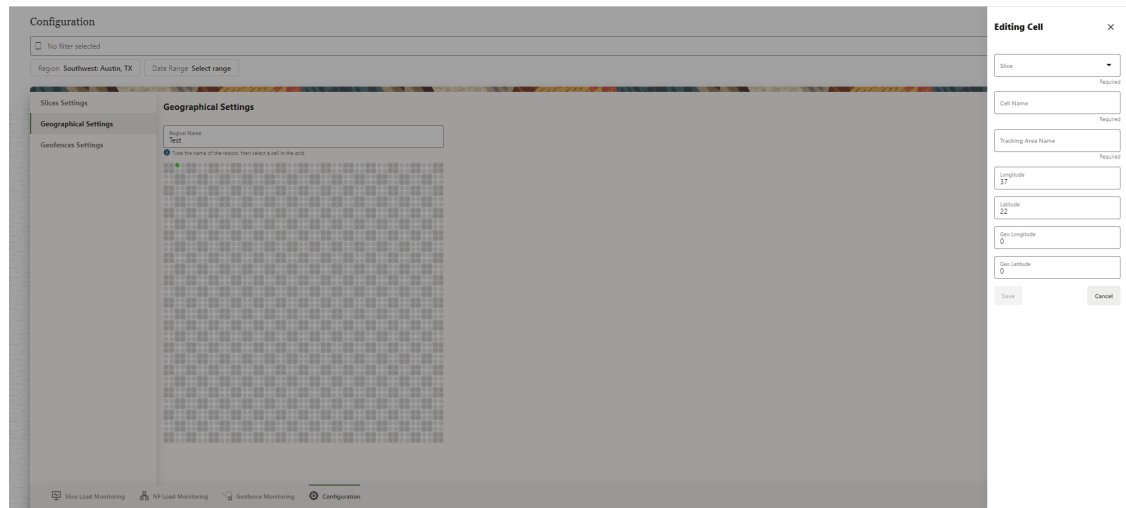Figure 8-10 Create New Region


- Provide a **Region Name**, and then select the cell in the grid.
- The **Editing Cell** screen displays on the right side of the screen to update the region information. Provide the following details:
 - Slice
 - Cell Name
 - Tracking Area Name
 - Longitude
 - Latitude
 - Geo Longitude
 - Geo Latitude
- Click **Save** to save the changes.
- Click **Cancel** to discard the changes.

8.6.2.2 Select Existing Region and Edit Cells

The **Geographical Settings** screen has an option to **Select Existing Region**. To visualize an existing region, click **Select Existing Region** drop down and select the desired region from the displayed list.

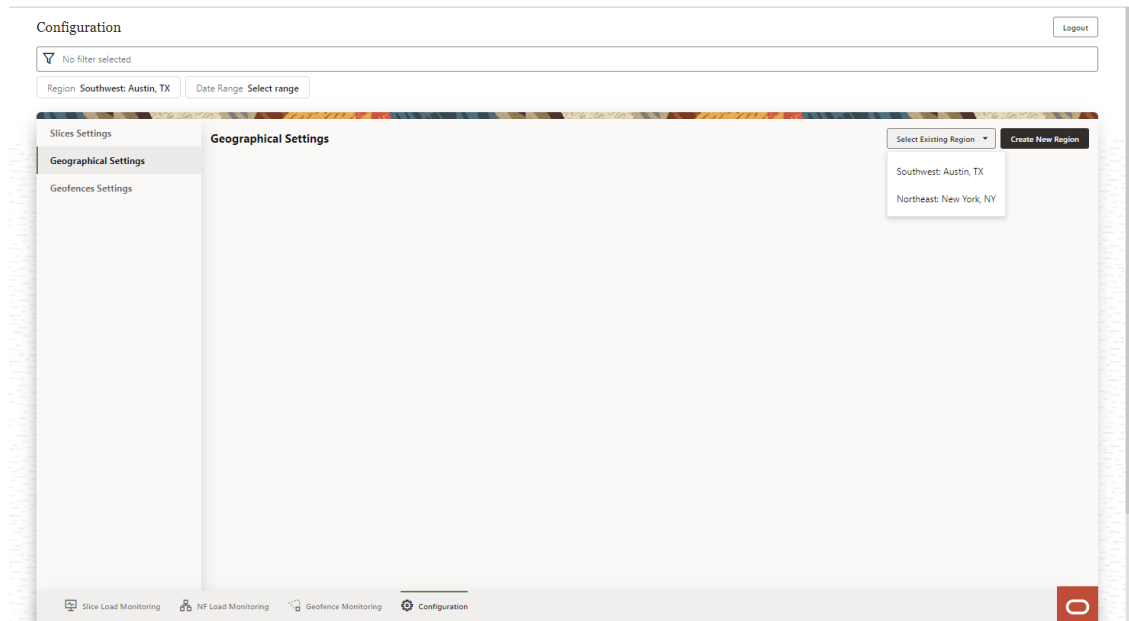Figure 8-11 Existing Region

A grid of cells in the selected region are displayed, select cell that you want to edit and the **Editing Cell** form appears on the right side of the screen:

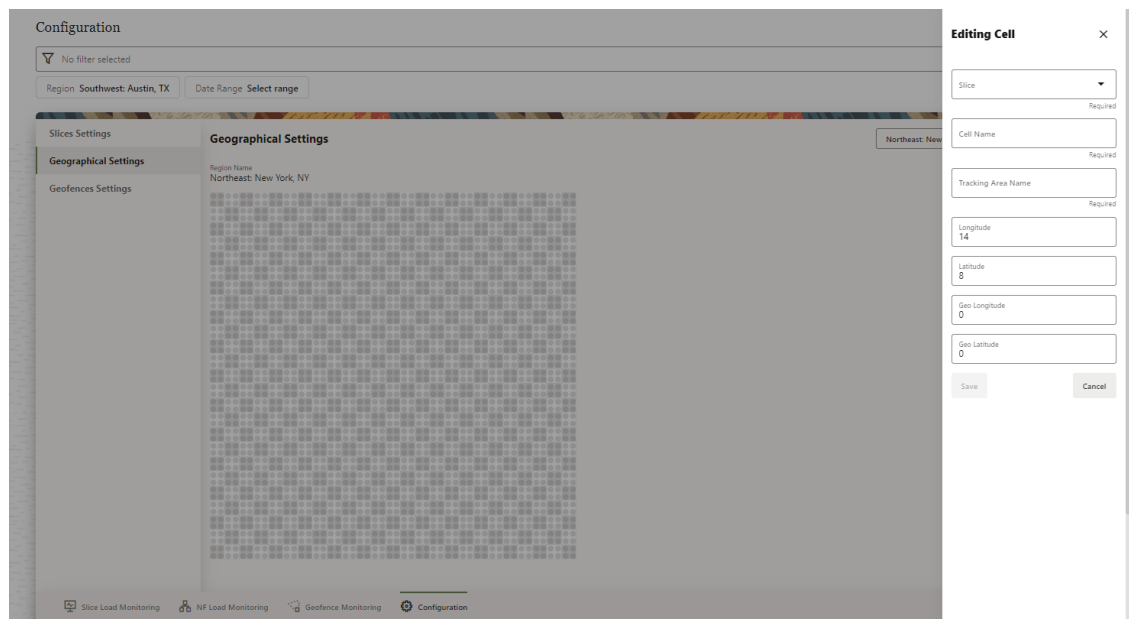Figure 8-12 Edit Cell

The following fields can be edited:

- Slice
- Cell Name


- Tracking Area Name
- Longitude
- Latitude
- Geo Longitude
- Geo Latitude

Click **Save** to save the changes or **Cancel** to discard the changes.

8.6.3 Geofence Settings

The **Configuration** screen displays the **Geofences Settings** option. Click on the **Geofences Settings** option on the left side of the screen. The **Geofences Settings** screen appears:

Figure 8-13 Geofences Settings

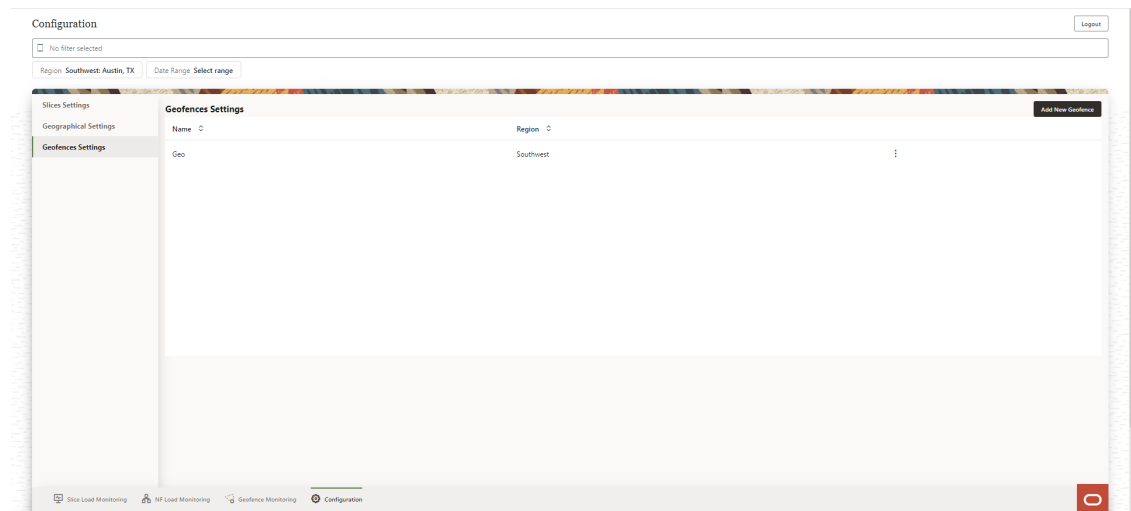


The user can perform the following actions on the **Geofences Settings** screen:

- [Add New Geofence](#)
- View the configured geofences and the following geofence parameters:
 - **Name**
 - **Region**
- Modify existing geofence information using the [Edit Value](#) button. This button appears as a pop up on clicking the three dot menu option on the right side of each configured geofence listed on the screen.
- Delete an existing geofence, using the [Delete](#) button. This button appears as a pop up on clicking the three dot menu option on the right side of each configured geofence listed on the screen.


8.6.3.1 Add New Geofence

To add a new geofence, click **Add New Geofence** button in the **Geofence Settings** screen. A form with the fields to add a new geofence "**Add Geofence**", appears on the right side of the screen:

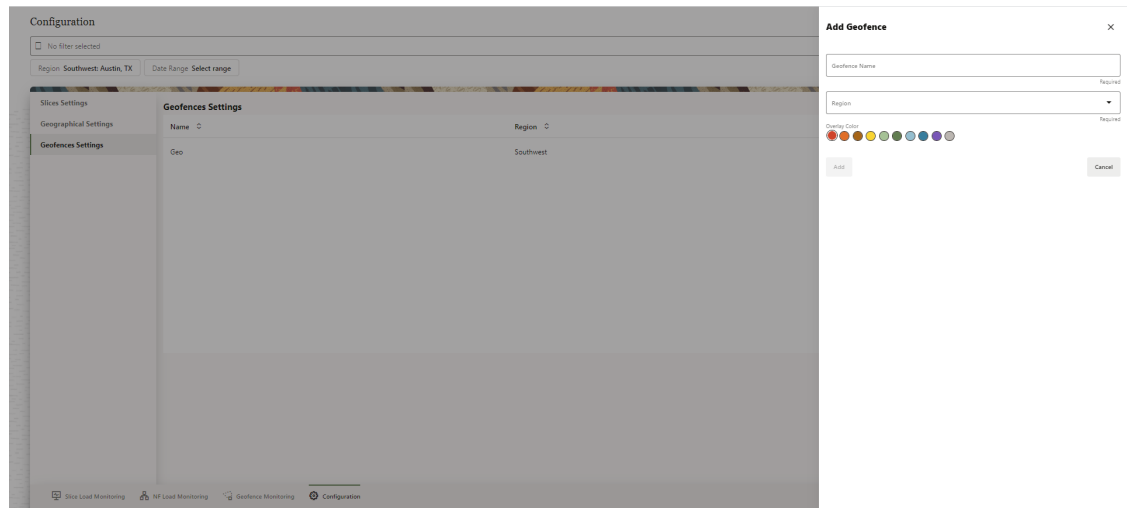Figure 8-14 Add New Geofence

Provide the following information to create a new geofence:

- Provide a **Geofence Name**. This is a required field.
- Select **Region** from the drop-down list. A map to **Draw your geofence area:** appears on the screen. Select the geofence points on the map.

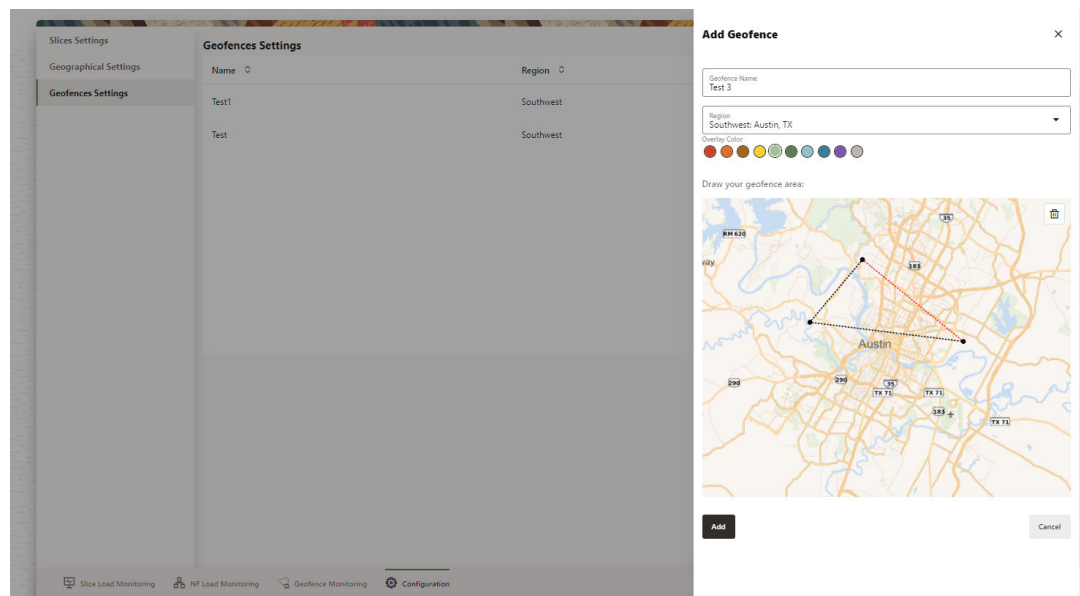Figure 8-15 Draw Geofence

- Select an **Overlay Color**.

Click the **Add** button after entering all the fields to create a new geofence. The new geofence will be listed in the **Geofence Settings** screen. Click **Cancel** to discard the changes.

8.6.3.2 Edit Value

To edit a geofence, click dotted menu button on the right side of the geofence to be edited. Click the **Edit value** option that appears as a pop up on the screen.

The **Edit Geofence** form appears on the right side of the screen.

Modify the required fields to edit the geofence. Click **Save** to apply the changes to the geofence or click **Cancel** to discard the changes.

8.6.3.3 Delete

To delete a geofence, click the three dot menu button on the right side of the geofence to be deleted. A pop up appears which has an option to **Delete** geofence.

Click **Delete**, a Delete geofence confirmation dialog box appears on the screen. Click **Delete** to confirm deletion or **Cancel** to cancel geofence deletion.

After the geofence is successfully deleted, a **Success** message appears on the screen.

9

Supported REST API Interfaces

This chapter describes the REST APIs supported by OCNWDAF.

9.1 Analytics Subscription Service

REST APIs create, modify, and delete OCNWDAF Event Subscriptions. REST APIs also send notifications about the observed event to the consumer NF.

Create an OCNWDAF Event Subscription

URI: {apiRoot}/nwdafeventsubscription/v1/subscriptions

Method: POST

Request Body:

Type: *NnwdafeventsSubscription*

Table 9-1 Request Body Parameters

Name	Data Type	P	Cardinality	Description
NnwdafeventsSubscription	Object	M	1	Creates a new individual OCNWDAF event subscription resource using a POST request.

Response:

Table 9-2 Supported Response Codes

Response Code	Description
201 Created	The response to successfully creating an OCNWDAF event subscription using a POST request. The stored subscribed event is returned.
400 Bad Request	The response to a POST request if the create subscription request does not contain valid data.
500 Internal Server Error	The response to a request if there is an internal server processing error.

Delete an OCNWDAF Event Subscription using SubscriptionID

URI: {apiRoot}/ocnwdafeventsubscription/v1/subscriptions/{subscriptionId}

Method: DELETE

Response:

Table 9-3 Supported Response Codes

Response Code	Description
204 No Content	The response to a successful delete subscription request.
404 Not found	The response to a DELETE request if the subscription is not found.
500 Internal Server Error	The response to a request if there is an internal server processing error.

Notify the Consumer NF about an observed event**URI:** Notification URI**Method:** POST**Request Body:****Type:** *NnwdafEventsSubscriptionNotification***Table 9-4 Request Body Parameters**

Name	Data Type	P	Cardinality	Description
NnwdafEventsSubscriptionNotification	Array	M	1 up to N	Provides information about observed events.

Response:**Table 9-5 Supported Response Codes**

Response Code	Description
204 No Content	The response to a successful notification event.
500 Internal Server Error	The response to a request if there is an internal server processing error.

9.2 Analytics Information Service

REST APIs are used to obtain analytics information from the Analytics Database service. The Analytics information service invokes Data collection and Analytics generation services by sending POST requests with specific AnalyticsIDs.

Retrieve OCNWDAF analytics information**URI:** {apiRoot}/nnwdaf-analyticsinfo/v1/analytics**Method:** GET**Request Body:****Type:**

Table 9-6 Request Body Parameters

Name	Data Type	P	Cardinality	Description
ana-req	EventReportingRequirement	O	0 to 1	Specifies the analytics event reporting requirement information.
event-id	EventId	M	1	Included to identify the analytics.
event-filter	EventFilter	C	0 to 1	Included to identify the analytics when filter information is needed for the related event.
supported-features	SupportedFeatures	O	0 to 1	Filters irrelevant responses related to unsupported features.
tgt-ue	TargetUeInformation	O	0 to 1	Identifies the target UE information.

Response:**Table 9-7 Supported Response Codes**

Response Code	Description
200 OK	A successful response, returned with requested analytics information in the message body.
204 No Content	Response if the requested analytics data does not exist.
400 Bad Request	Response to the request: - When NF consumers request both statistical and predictive analytics. - When the requested supportedFeatures or AnalyticsID is not valid. - When the request has invalid optional parameters. - In the absence of EventFilter in Request Parameters for data collection.
422 Unprocessable Entity	The response for the request when OCNWDAF-NRFCClient is not registered.
500 Internal Server Error	The response to a request if there is an internal server processing error.

9.3 OCNWDAF Analytics APIs

The 5G NFs can subscribe (or cancel) to a specific network analytics and also obtain a network analytics report for a particular context from the OCNWDAF. The analytics supported are Slice Load Level, UE Mobility, UE Abnormal Behavior, NF Load Level and Network Performance Analytics.

Note**Pre-requisites:**

- The NRF is deployed and running.
- The OCNWDAF is deployed and running.
- The Notification microservice is deployed and running.
- OCNWDAF profile is created.
- OCNWDAF token is created.

The following APIs are invoked to obtain analytics information:

- [UE Abnormal Behavior Analytics](#)
- [Slice Load Level Analytics](#)
- [UE Mobility Analytics](#)
- [NF Load Analytics](#)
- [Network Performance Analytics](#)

9.3.1 UE Abnormal Behavior Analytics

This service operation is used to subscribe to UE Abnormal Behavior Analytics.

Type: POST

URI: {apiRoot}/nnwdaf-eventssubscription/v1/subscriptions/

Initiated By: Consumers

Table 9-8 Request Body Parameters

Field Name	Data Type	Description
notificationURI	Uri	The URI which receives the requested notifications from the OCNWDAF. This parameter is provided by the NF service consumer in the HTTP POST request that creates the subscriptions for event notifications.
supportedFeatures	SupportedFeatures	The supported feature number.
evtReq	ReportingInformation	Is the event reporting information applicable for each event. It contains the following attributes: • immRep • notifMethod • maxReportNbr • monDur
immRep	Boolean	Immediate reporting indication. If this value is set to "true" the OC-NWDAF includes the reports of the events subscribed (if available), in the HTTP POST response.
notifMethod	String	Event notification method. The allowed values are: • ON_EVENT_DETECTION
maxReportNbr	Integer	Maximum number of reports.

Table 9-8 (Cont.) Request Body Parameters

Field Name	Data Type	Description
monDur	Date time	Monitoring the duration.
eventSubscriptions	Array(EventSubscription)	A description of the subscribed events. It contains the following attributes: - event - tgtUe - exptAnaType - exptUeBehav
event	String	Indicates that the event subscribed is "ABNORMAL_BEHAVIOUR".
tgtUe	TargetUeInformation	Identifies the target UE information for which the subscription applies by "supis" , "intGroupIds" and "anyUe" attributes.
exptAnaType	ExpectedAnalyticsType	Represents expected UE analytics type. It should be set to "MOBILITY" Absent if the "excepRequs" attribute is provided.
exptUeBehav	ExpectedUeBehaviourData	Represents expected UE behaviour, it is used to define a geofence.
supis	Array	Identifies a SUPI for an UE.
intGroupIds	Array	Represents an internal group identifier and identifies a group of UEs.
anyUe	Boolean	Identifies any UE when set to true.
anySlice	Boolean	True: Indicates applicable to all slices. False: Indicates not applicable to all slices.
excepRequs	Array	Represents a list of Exception Ids with associated thresholds.
excepId	ExceptionId	Describes the Exception ID. The allowed values are "UE_GEOFENCE" or "UE_UNEXPECTED_LOCATION"
excepTrend	ExceptionTrend	Indicates whether the UE's location is IN_FENCE, OUT_FENCE, or UNKNOWN.
excepLevel	Integer	Measured exception level compared to the threshold value.
networkArea	NetworkAreaInfo	Represents the network area where the NF service consumer wants to know the analytics result.
extraReportReq	EventReportingRequirement	The extra event reporting requirement information.
startTs	DateTime	UTC time indicating the start time of the observation period. The absence of this attribute means subscription at the present time.
endTs	DateTime	UTC time indicating the end time of the observation period. The absence of this attribute means subscription at the present time. If provided, it shall not be less than the start time.
notificationMethod	NotificationMethod	Indicates the notification method.
snssaia	String	Identifies of network slice to which the subscription belongs.

Table 9-8 (Cont.) Request Body Parameters

Field Name	Data Type	Description
stationaryIndication	StationaryIndication	Identifies whether the UE is stationary or mobile
expectedUmts	Array	Identifies the UE's expected geographical movement.
nwAreaInfo	NetworkAreaInfo	Represents the network area information of the user where the UE is located.
ecgis	Array	Contains a list of E-UTRA cell identities.
plmnId	Plmnid	Indicates PLMN where Enhanced Coverage shall be restricted.
mcc	Integer	Mobile Country Code
mnc	Integer	Mobile Network Code
eutraCellId	Array	EUTRA cell identifier
nid		
ncgis	Array	Contains a list of NR cell identities.
tais	Array	Contains a list of tracking area identities.
gRanNodeIds	Array	Contains a list of the NG-RAN nodes.
geographicAreas	Array	Identifies a list of geographic area of the user where the UE is located.
point	Integer	Geographical area consisting of a single point, represented by its longitude and latitude.
shape	SupportedGADShapes	This field takes on the value of the point.
point	GeographicalCoordinates	Represents the longitude and latitude of a point.
civicAddresses	Array	Identifies a list of civic addresses of the user where the UE is located.
validityTime	Date time	Identifies when the expected UE behaviour parameters expire, the parameters are deleted locally on expiry.
repPeriod	Date time	Repetition period for periodic reporting.
sampRatio	SamplingRatio	Percentage of sampling among impacted UEs.
grpRepTime	Datetime	Group reporting guard time for aggregating the reports for a group of UEs .

When the event parameter is "ABNORMAL_BEHAVIOUR", the following analytics are provided:

1. Identification of target UE(s) to which the subscription applies by "supis", "intGroupIds" or "anyUe" attribute in the "tgtUe" attribute.
2. Expected analytics type through the "exptAnaType" attribute.
3. Expected UE behavior through "exptUeBehav" attribute.
4. Either "exceptRequs" or "exptAnaType" shall be provided if subscribed event is "ABNORMAL_BEHAVIOUR".
5. Only "exceptId" and "exceptLevel" within the Exception data type apply to the "exceptRequs" attribute within EventSubscription data type.

Note

The data types supported by OCNWDAF comply with the 3GPP specifications. For more information about the 3GPP data types, see [3GPP Technical Specification 29.520, Release 16, Network Data Analytics Services](#).

Table 9-9 Supported Response Codes

Code	Description
201	The subscription resource is created successfully.
400	Bad Request. The request is incorrect and subscription is not created.
500	Indicates a internal server processing error.

Examples

The following example shows how an NF creates a subscription request for UE Abnormal Behavior Analytics by submitting a POST request on the REST resource using cURL.

cURL Command

```
curl --location --request POST '{HTTP_ENDPOINT}' --header 'Content-Type: application/json' --data-raw '{JSON_OBJECT}'
```

Example of the Request Body

```
{
  "notificationURI": "http://10.123.158.150:32082/notification",
  "supportedFeatures": "010",
  "eventSubscriptions": [
    {
      "event": "ABNORMAL_BEHAVIOUR",
      "extraReportReq": {
        "startTs": "2023-05-11T22:13:21Z",
        "endTs": "2023-05-11T22:33:21Z"
      }
    }
  ],
  "exptUeBehav": {
    "expectedUmts": [
      {
        "geographicAreas": [
          {
            "shape": "POLYGON",
            "offsetAngle": 0,
            "includedAngle": 0,
            "uncertaintyAltitude": 0,
            "confidence": 0,
            "innerRadius": 0,
            "altitude": 0,
            "uncertaintyEllipse": {
              "semiMajor": 0.0,
              "semiMinor": 0.0,
              "orientationMajor": 0
            }
          }
        ],
        "uncertainty": 0,
        "uncertaintyRadius": 0,
        "point": {
          "lon": 0.0,
          "lat": 0.0
        },
        "pointList": [
          {
            "lon": 14,
            "lat": 10
          },
          {
            "lon": 14,
            "lat": 15
          },
          {
            "lon": 19,
            "lat": 15
          },
          {
            "lon": 19,
            "lat": 10
          }
        ],
        "umtTime": {
          "timeOfDay": "",
          "dayOfWeek": 1
        },
        "validityTime": "2023-06-12T22:13:27Z",
        "tgtUe": {}
      }
    ]
  }
}
```

```
{
  "supis": ["imsi-334800660487647"], "anyUe": false}
,
  "excepReqs": [{"excepId": "UE_GEOFENCE", "excepLevel":
5, "excepTrend": "OUT_OF_FENCE"}],
  "snssais": [{"sst": 2, "sd": "405060"}]},
  "evtReq": {"notifMethod": "ONE_TIME", "monDur":
"2023-05-17T22:13:21Z", "immRep": false, "maxReportNbr": 100, "repPeriod": 1,
"sampRatio": 75, "grpRepTime": 0}}
```

9.3.2 Slice Load Level Analytics

This service operation is used to subscribe to Slice Load Level Analytics.

Type: POST

URI: {apiRoot}/nnwdafeventssubscription/v1/subscriptions/

Initiated By: Consumers

Table 9-10 Request Body Parameters

Field Name	Data Type	Description
notificationURI	uri	The URI which receives the requested notifications from the OCNWDAF. This parameter provided by the NF service consumer in the HTTP POST request that creates the subscriptions for event notifications.
supportedFeatures	SupportedFeatures	The supported feature number.
evtReq	ReportingInformation	Is the event reporting information applicable for each event. It contains the following attributes: - immRep - notifMethod - maxReportNbr - monDur
immRep	boolean	Immediate reporting indication. This value is set to "true" the OC-NWDAF includes the reports of the events subscribed, if available, in the HTTP POST response.
notifMethod	string	Event notification method. The allowed values are: - ON_EVENT_DETECTION - ONE_TIME - PERIODIC
maxReportNbr	integer	Maximum Number of Reports.
monDur	Date time	Monitoring duration.
eventSubscriptions	array(EventSubscription)	A description of the subscribed events. It contains the following attributes: - event - anySlice - loadLevelThreshold - notificationMethod - snssaia
event	string	Indicates that the event subscribed is load level information of Network Slice, "SLICE_LOAD_LEVEL"

Table 9-10 (Cont.) Request Body Parameters

Field Name	Data Type	Description
anySlice	boolean	- True: Indicates applicable to all slices. - False: Indicates not applicable to all slices.
loadLevelThreshold	integer	The OCNWDAF reports the corresponding network slice load level to the NF service consumer when the load level of the network slice identified by snssais has reached.
notificationMethod	NotificationMethod	Indicates the notification method. The allowed values are: - PERIODIC: The subscription of OCNWDAF event is periodic. - THRESHOLD: The subscription of OCNWDAF event is on exceeding threshold value.
snssaia	String	Identifies of network slice to which the subscription belongs.
sst	UInteger	Unsigned integer, within the range 0 up to 255, representing the Slice or Service Type.
sd	String	3-octet string, representing the Slice Differentiator, in hexadecimal representation.

When the event parameter is "SLICE_LOAD_LEVEL", the following analytics are provided:

1. The Network slice load level threshold in the "loadLevelThreshold" attribute if the "notifMethod" attribute in "evtReq" attribute is "ON_EVENT_DETECTION" or the "notificationMethod" attribute in "eventSubscriptions" attribute is "THRESHOLD" or "OMITTED".
2. Identification of network slice(s) to which the subscription applies through the identification of network slice(s) in the "snssais" attribute or as indicated in the "anySlice" attribute.

Note

The data types supported by OCNWDAF comply with the 3GPP specifications. For more information about the 3GPP data types, see [3GPP Technical Specification 29.520, Release 16, Network Data Analytics Services.](#)

Table 9-11 Supported Response Codes

Code	Description
201	The subscription resource is created successfully.
400	Bad Request. The request is incorrect and subscription is not created.
500	Indicates a internal server processing error.

Examples

The following example shows how an NF creates a subscription request for Slice Load Level analytics by submitting a POST request on the REST resource using cURL.

cURL Command

```
curl --location --request POST '{HTTP_ENDPOINT}' \
--header 'Content-Type: application/json' \
--data-raw '{JSON_OBJECT}'
```

Example of the Request Body

```
{ "notificationURI": "https://{CONSUMERAPIROOT}/notification",
  "supportedFeatures": "100",
  "evtReq": {
    "immRep": false,
    "notifMethod": "ON_EVENT_DETECTION",
    "maxReportNbr": 0,
    "monDur": "2022-06-24T04:00:00Z" }
  "eventSubscriptions": [{
    "event": "SLICE_LOAD_LEVEL",
    "anySlice": false, "loadLevelThreshold": 10,
    "notificationMethod": "THRESHOLD",
    "snssaia": [{
      "sst": 2,
      "sd": null }] ]}] }
```

9.3.3 UE Mobility Analytics

This service operation is used to subscribe to UE Mobility Analytics.

Type: POST

URI: {apiRoot}/nnwdafeventsubscription/v1/subscriptions/

Initiated By: Consumers

Table 9-12 Request Body Parameters

Field Name	Data Type	Description
notificationURI	uri	The URI which receives the requested notifications from the OCNWDAF. This parameter provided by the NF service consumer in the HTTP POST request that creates the subscriptions for event notifications.
supportedFeatures	SupportedFeatures	The supported feature number.
evtReq	ReportingInformation	Is the event reporting information applicable for each event. It contains the following attributes: • immRep • notifMethod • maxReportNbr • monDur
immRep	boolean	Immediate reporting indication. This value is set to "true" the OC-NWDAF includes the reports of the events subscribed, if available, in the HTTP POST response.
notifMethod	string	Event notification method. The allowed values are: • ONE_TIME • PERIODIC

Table 9-12 (Cont.) Request Body Parameters

Field Name	Data Type	Description
maxReportNbr	integer	Maximum Number of Reports.
monDur	Date time	Monitoring duration.
eventSubscriptions	array(EventSubscription)	A description of the subscribed events. It contains the following attributes: - event - tgtUe - networkArea
event	string	Indicates that the event subscribed is "UE_MOBILITY".
tgtUe	TargetUeInformation	Identifies the target UE information for which the subscription applies by "supis" , "intGroupIds" and "anyUe" attributes.
networkArea	NetworkAreaInfo	Identification of network area to which the subscription applies.
supis	array	Identifies a SUPI for an UE.
intGroupIds	array	Represents an internal group identifier and identifies a group of UEs.
anyUe	boolean	Identifies any UE when set to true.

When the event parameter is "UE_MOBILITY", the following analytics are provided:

1. Identification of target UE(s) to which the subscription applies by "supis" or "intGroupIds" attribute in the "tgtUe" attribute.
2. Identification of network area to which the subscription applies through the identification of network area by "networkArea" attribute.

Note

The data types supported by OCNWDAF comply with the 3GPP specifications. For more information about the 3GPP data types, see [3GPP Technical Specification 29.520, Release 16, Network Data Analytics Services](#).

Table 9-13 Supported Response Codes

Code	Description
201	The subscription resource is created successfully.
400	Bad Request. The request is incorrect and subscription is not created.
500	Indicates a internal server processing error.

Examples

The following example shows how an NF creates a subscription request for UE Mobility Analytics by submitting a POST request on the REST resource using cURL.

cURL Command

```
curl --location --request POST '{HTTP_ENDPOINT}' --header 'Content-Type: application/json' --data-raw '{JSON_OBJECT}'
```

Example of the Request Body

```
{ "notificationURI": "https://{CONSUMERAPIROOT}/notification",
  "supportedFeatures": "002",
  "evtReq": {
    "immRep": "false",
    "notifMethod": "PERIODIC",
    "maxReportNbr": 0,
    "monDur": "2022-06-24T04:00:00Z" },
  "eventSubscriptions": [{
    "event": "UE_MOBILITY",
    "tgtUe": {
      "supis": ["{VALIDSUPID}"],
      "intGroupIds": null,
      "anyUe": false },
      "networkArea": null
    }
  ]
}
```

9.3.4 NF Load Analytics

This service operation is used to subscribe to NF Load Analytics.

Type: POST

URI: {apiRoot}/nnwdafeventssubscription/v1/subscriptions/

Initiated By: Consumers

Table 9-14 Request Body Parameters

Field Name	Data Type	Description
AnySlice	boolean	Default is FALSE. If TRUE ignore any snssais, array of Snssai or slice IDs.
event	string	Event that is subscribed, in this case "NF_LOAD".
networkArea	array	Identification of network area to which the subscription applies. The absence of networkArea means subscription to all network areas.

Note

It should be set to "null". It is an optional field.

Table 9-14 (Cont.) Request Body Parameters

Field Name	Data Type	Description
startTs	date format in UTC timezone	UTC time indicating the start time of the observation period. The absence of this attribute means subscription at the present time.
endTS	date format in UTC timezone	UTC time indicating the end time of the observation period. The absence of this attribute means subscription at the present time. If provided, it should not be less than the start time.
notificationMethod	string	Indicates the notification method. When notificationMethod is not provided, the default value is "THRESHOLD".
matchingDir	boolean	A matching direction may be provided alongside a threshold. If omitted, the default value is CROSSED. This field is optional.
nfLoadLvITHds		Indicates when the reporting should start after the after the average load level is reached. This field is provided if the "notifMethod" in "evtReq" is set to "ON_EVENT_DETECTION" or "notificationMethod" in "eventSubscriptions" is set to "THRESHOLD" or omitted. "congLevel": integer "nfLoadLevel": integer, "nfCpuUsage": integer, "nfMemoryUsage": integer, "nfStorageUsage": integer
nfInstancelds	array	An array of Identification(s) of NF instances. This field is optional.
nfSetIds	array	An array of Identification(s) of NF instance sets. This field is optional.
nfTypes	array	An array of Identification(s) of NF types. This field is optional.
snssais	array	Identification(s) of network slice to which the subscription applies. This field is optional and should be set to NULL.
tgtUe	array(TargetUeInformation) - anyUe, boolean - supis, array of Supi	Only applicable to determine AMF or SMF (from the SUPI). Identifies target UE information.
congThresholds	array	Represents the congestion threshold levels. "congLevel": 20, "nfLoadLevel": 50, "nfCpuUsage": 90, "nfMemoryUsage": 95, "nfStorageUsage": 80
exptAnaType	string	It should be set to "MOBILITY" Represents expected UE analytics type. Absent if the "exceptReques" attribute is provided.

Table 9-14 (Cont.) Request Body Parameters

Field Name	Data Type	Description
evtReq	array	Should be ON_EVENT_DETECTION if thresholds are defined, or notificationMethod is THRESHOLD. Represents the reporting requirements of the event subscription. If omitted, the default values within the ReportingInformation data type apply. "immRep": false, Set by default "notifMethod": "ON_EVENT_DETECTION", "maxReportNbr": integer, "monDur": date format in UTC timezone, "repPeriod": integer and optional, "sampRatio": integer and optional, "grpRepTime": integer and optional
notificationURI	Uri	URI where to receive the requested notifications. Identifies the recipient of Notifications sent by the OCNWD AF.
supportedFeatures	string	This property should be "NfLoad".

Table 9-15 Supported Response Codes

Code	Description
201	The subscription resource is created successfully.
400	Bad Request. The request is incorrect and subscription is not created.
500	Indicates a internal server processing error.

Examples

The following example shows how an NF creates a subscription request for NF load analytics by submitting a POST request on the REST resource using cURL.

cURL Command

```
curl --location --request PUT '{apiRoot}/nnwdaf-eventssubscription/v1/subscriptions/' \
--header 'Content-Type: application/json' \
--data-raw '{request_body}'
```

Example of the Request Body

```
{
  "eventSubscriptions": [
    {
      "anySlice": true,
      "event": "NF_LOAD",
      "networkArea": null,
      "extraReportReq": {
        "startTs": "2022-09-06T05:00:30Z",
        "endTs": "2022-10-19T23:59:59Z"
      }
    }
  ]
}
```

```

    },
    "notificationMethod": "THRESHOLD",
    "matchingDir": null,
    "nfLoadLvlThds": [
      {
        "congLevel": 20,
        "nfLoadLevel": 20,
        "nfCpuUsage": 90,
        "nfMemoryUsage": 95,
        "nfStorageUsage": 80
      }
    ],
    "nfInstanceIds": null,
    "nfSetIds": null,
    "nfTypes": [
      "AMF",
      "SMF"
    ],
    "snssaia": null,
    "tgtUe": {
      "supis": null,
      "intGroupIds": null,
      "anyUe": false
    },
    "congThresholds": [
      {
        "congLevel": 20,
        "nfLoadLevel": 50,
        "nfCpuUsage": 90,
        "nfMemoryUsage": 95,
        "nfStorageUsage": 80
      }
    ],
    "exptAnaType": "MOBILITY"
  }
],
"evtReq": {
  "immRep": false,
  "notifMethod": "ON_EVENT_DETECTION",
  "maxReportNbr": 50,
  "monDur": "2022-10-19T23:59:59Z",
  "repPeriod": 10,
  "sampRatio": 75,
  "grpRepTime": 0
},
"notificationURI": "{apiRoot}/notification",
"supportedFeatures": "040"
}

```

Example of the Response Body

```

{
  "eventSubscriptions": [
    {
      "anySlice": true,

```

```

        "event": "NF_LOAD",
        "extraReportReq": {
            "startTs": "2022-09-06T05:00:30Z",
            "endTs": "2022-10-19T23:59:59Z"
        },
        "notificationMethod": "THRESHOLD",
        "nfLoadLvlThds": [
            {
                "congLevel": 20,
                "nfLoadLevel": 20,
                "nfCpuUsage": 90,
                "nfMemoryUsage": 95,
                "nfStorageUsage": 80
            }
        ],
        "nfTypes": [
            "AMF",
            "SMF"
        ],
        "congThresholds": [
            {
                "congLevel": 20,
                "nfLoadLevel": 50,
                "nfCpuUsage": 90,
                "nfMemoryUsage": 95,
                "nfStorageUsage": 80
            }
        ],
        "exptAnaType": "MOBILITY"
    },
    "evtReq": {
        "immRep": false,
        "notifMethod": "ON_EVENT_DETECTION",
        "maxReportNbr": 50,
        "monDur": "2022-10-19T23:59:59Z",
        "repPeriod": 10,
        "sampRatio": 75,
        "grpRepTime": 0
    },
    "notificationURI": "{apiRoot}/notification",
    "supportedFeatures": "040"
}

```

9.3.5 Network Performance Analytics APIs

Create a Network Performance Analytics Subscription

This service operation is used to create a Network Performance Analytics subscription.

Type: POST

URI: {apiroot}:{serverPort}/nnwdafeventsubscription/<api version>/subscriptions

Table 9-16 Endpoint Parameters

Parameter	Description	Example
{apiroot}	The IP used to access the OCNWDAF subscription.	
{serverport}	The port used to access the OCNWDAF subscription. Default value is 8080.	
{subscriptionId}	Subscription ID	
{analyticsId}	The analytics ID is "NETWORK_PERFORMANCE"	
{supported-features}	080	
{tgt-ue}	Encoded Target UE information.	<pre>{ "supis": null, "intGroupIds": null, "anyUe": true }</pre>

Table 9-16 (Cont.) Endpoint Parameters

Parameter	Description	Example
{event-filter}	Encoded event filter value.	<pre> { "anySlice": false, "networkArea": { "ecgis": [{ "plmnId": { "mcc": "611", "mnc": "946" }, "eutraCellId": "60De3B8", "nid": "2f9CcfeEC9a" }], "ncgis": [{ "plmnId": { "mcc": "375", "mnc": "36" }, "nrCellId": "eFdEDcE7D", </pre>

Table 9-16 (Cont.) Endpoint Parameters

Parameter	Description	Example
		<pre> "nid": "e5D8B1EbD11" }], "gRanNodeIds": [{ "plmnId": { "mcc": "791", "mnc": "230" }, "n3IwfId": "CB1E5ba", "gNbId": { "bitLength": 32, "gNBValue": "BF6B9E" }, "ngeNbId": "SMacroNGeNB- F5CCC", "wagfId": "8f", "tngfId": "1a473d3D", "nid": "BFbBAabEBD3", }] </pre>

Table 9-16 (Cont.) Endpoint Parameters

Parameter	Description	Example
		<pre> "eNbId": "MacroenB- f26ab" }], "tais": [{ "plmnId": { "mcc": "585", "mnc": "162" }, "tac": "ebef4B", "nid": "fDfC6bbc673" }] }, "nwPerfTypes": ["NUM_OF_UE"] } </pre>

Table 9-16 (Cont.) Endpoint Parameters

Parameter	Description	Example
{ana-req}	Encoded value of analytics requirements.	<pre>{ "startTs": "2023-02-08T12:00:10.000021", "endTs": "2023-05-13T12:02:05.000000", "timeAnaNeeded": "2024-12-13T12:00:01.000000", "maxObjectNbr": 10, "sampRatio": 1 }</pre>

Initiated By: Consumers**Request Body Parameters****Table 9-17 Type NnwdafEventsSubscription**

Parameter	Data Type	Presence	Description
eventSubscriptions	array(EventSubscription)	M	Subscribed events. The event parameter within event subscriptions is "NETWORK PERFORMANCE"
evtReq	ReportingInformation	O	Represents the reporting requirements of the event subscription. If this parameter is not given then the default values for ReportingInformation is used. The notification method "notifMethod" within ReportingInformation takes precedence over notificationMethod within EventSubscription.
notificationURI	URI	C	URI to which the NWDAF sends the reports.

Table 9-17 (Cont.) Type NnwdafeventsSubscription

Parameter	Data Type	Presence	Description
eventNotifications	array(EventNotification)	C	Notifications about Individual Events. Present only if the immediate reporting indication in the "immRep" attribute within the "evtReq" attribute is set to true in the event subscription, and the reports are available. Present in the response to NWDAF subscription if "immRep" is true and the reports are the available.
failEventReports	array(FailureEventInfo)	O	Supplied by the NWDAF. When this parameter is available, it contains the event(s) for which the subscription is not successful including the failure reason(s). This parameter is populated and returned in response to the error case.
consNfInfo	ConsumerNfInformation	O	Represents the analytics consumer NF information.
notifCorrId	String	M	Notification correlation ID. It is generated after successful subscription and is returned back in the response.
supportedFeatures	SupportedFeatures	C	This parameter is supplied by NF service consumer in the POST request for creation of an NWDAF Event Subscriptions resource, and supplied by the NWDAF in the reply of corresponding request. Value is "080" for Network Performance ID.

Table 9-18 Type EventSubscription

Parameter	Data Type	Presence	Description
event	NwdafEvent	M	Event that is subscribed. The value for network performance ID is "NETWORK PERFORMANCE"
extraReportReq	EventReportingRequirement	O	The extra event reporting requirement information.
loadLevelThreshold	Integer	C	Indicates that the NWDAF shall report the corresponding network slice load level to the NF service consumer where the load level of the network slice identified by snssais is reached.

Table 9-18 (Cont.) Type EventSubscription

Parameter	Data Type	Presence	Description
matchingDir	MatchingDirection	O	A matching direction may be provided alongside a threshold. If omitted, the default value is CROSSED.
networkArea	NetworkAreaInfo	C	Identification of network area to which the subscription applies. The absence of this parameter means the subscription is applicable to all the network areas.
notificationMethod	NotificationMethod	O	Indicates the notification method.
repetitionPeriod	DurationSec	C	Shall be supplied for notification method "PERIODIC" by the "notificationMethod" attribute.
tgtUe	TargetUeInformation	O	Identifies target UE information.
nwPerfRequs	array(NetworkPerfRequirement)		Represents the network performance requirements. This attribute shall be included when subscribed event is "NETWORK_PERFORMANCE". It may only be present if "applds" attribute is provided.

Table 9-19 Type NnwdafEventsSubscriptionNotification

Parameter	Data Type	Presence	Description
eventNotifications	array (EventNotification)	C	Notifications about individual events.
subscriptionId	String	M	String identifying a subscription to the Nnwdaf_EventsSubscription service.

Table 9-20 Type EventNotification

Parameter	Data Type	Presence	Description
event	NwdafEvent	M	Subscribed events. The event parameter within event Subscriptions has to be "NETWORK PERFORMANCE"
start	DateTime	O	It defines the start time from when the analytics information becomes valid.
expiry	DateTime	O	It defines the expiration time after which the analytics information will become invalid.
timeStampGen	DateTime	C	It defines the timestamp of analytics generation.
nwPerfs	array(NetworkPerfInfo)	C	The network performance information.

Table 9-21 Supported Response Codes

Code	Description
201	The subscription is created successfully.
400	Bad Request. The request is incorrect and subscription is not created.
500	Indicates a internal server processing error.

Examples

The following example shows how an NF creates a subscription for Network Performance analytics by submitting a POST request on the REST resource using cURL.

cURL Command

```
curl --location '10.123.159.23:8087/nnwdaf-eventssubscription/v1/
subscriptions' \
--header 'accept: application/json' \
--header 'Content-Type: application/json' \
--data '{
  "notificationURI": "http://prodcon-1:9282/receive",
  "supportedFeatures": "080",
  "eventSubscriptions": [
    {
      "event": "NETWORK_PERFORMANCE",
      "extraReportReq": {
        "startTs": "2023-03-15T18:00:00Z",
        "endTs": "2023-03-16T18:30:00Z",
        "accuracy": null,
        "sampRatio": 70,
        "maxObjectNbr": 5,
```

```

        "maxSupiNbr": 2,
        "timeAnaNeeded": null
    },
    "loadLevelThreshold": 1,
    "nfLoadLvlThds": [
        {
            "congLevel": 20,
            "nfCpuUsage": 90,
            "nfLoadLevel": 11,
            "nfMemoryUsage": 95,
            "nfStorageUsage": 80
        }
    ],
    "notificationMethod": "THRESHOLD",
    "snssaia": [
        {
            "sst": 1,
            "sd": "102030"
        }
    ],
    "tgtUe": {
        "supis": null,
        "intGroupIds": null,
        "anyUe": true
    },
    "nfInstanceIds": null,
    "nfSetIds": null,
    "matchingDir": "CROSSED",
    "networkArea": {
        "ecgis": [
            {
                "plmnId": {
                    "mcc": "611",
                    "mnc": "946"
                },
                "eutraCellId": "60De3B8",
                "nid": "2f9CcfeEC9a"
            }
        ],
        "ncgis": [
            {
                "plmnId": {
                    "mcc": "375",
                    "mnc": "36"
                },
                "nrCellId": "0E0FB2773",
                "nid": "e5D8B1EbD11"
            }
        ],
        "gRanNodeIds": [
            {
                "plmnId": {
                    "mcc": "791",
                    "mnc": "230"
                },
                "n3IwfId": "CB1E5ba",

```

```

        "gNbId": {
            "bitLength": 32,
            "gNBValue": "BF6B9E"
        },
        "ngeNbId": "SMacroNGeNB-F5CCC",
        "wagfId": "8f",
        "tngfId": "1a473d3D",
        "nid": "BFbBAabEBD3",
        "eNbId": "MacroeNB-f26ab"
    },
    ],
    "tais": [
        {
            "plmnId": {
                "mcc": "585",
                "mnc": "162"
            },
            "tac": "ebef4B",
            "nid": "fDfC6bbC673"
        }
    ],
    ],
    "nfTypes": [
        "AMF"
    ]
},
"evtReq": {
    "notifMethod": "ONE_TIME",
    "monDur": "2023-04-14T11:10:00Z",
    "immRep": false,
    "maxReportNbr": 2,
    "repPeriod": 1,
    "sampRatio": 70,
    "grpRepTime": 60
}
}'

```

Example of the Request Body

```

{
    "eventSubscriptions": [
        {
            "anySlice": "N/A",
            "appIds": null,
            "dnns": null,
            "dnais": null,
            "event": "NETWORK_PERFORMANCE",
            // necessary for subscribing to AMF for number of UEs
            "networkArea": // ---applicable if anyUE:true---
            // 29.554 - 5.6.2.8
            {
                "ecgis": [
                    {
                        "plmnId": {

```

```

        "mcc": "611",
        "mnc": "946"
    },
    "eutraCellId": "60De3B8",
    "nid": "2f9CcfeEC9a"
}
],
"ncgis": [
{
    "plmnId": {
        "mcc": "375",
        "mnc": "36"
    },
    "nrCellId": "eFdEDcE7D",
    "nid": "e5D8B1EbD11"
}
],
"gRanNodeIds": [
{
    "plmnId": {
        "mcc": "791",
        "mnc": "230"
    },
    "n3IwfId": "CB1E5ba",
    "gNbId": {
        "bitLength": 32,
        "gNBValue": "BF6B9E"
    },
    "ngeNbId": "SMacroNGeNB-F5CCC",
    "wagfId": "8f",
    "tngfId": "1a473d3D",
    "nid": "BFbBAabEBD3",
    "eNbId": "MacroeNB-f26ab"
}
],
"tais": [
{
    "plmnId": {
        "mcc": "585",
        "mnc": "162"
    },
    "tac": "ebef4B",
    "nid": "fDfC6bbC673"
}
]
],
"extraReportReq": {
    "startTs": "2022-11-23T05:00:30Z",
    "endTs": "2022-11-30T23:59:59Z"
},
"loadLevelThreshold": 0,
// default THRESHOLD
"notificationMethod": "THRESHOLD",
// default CROSSED
"matchingDir": "ASCENDING / DESCENDING / CROSSED",
"nfLoadLvlThds": null,

```

```

        "nfInstanceIds": null,
        "nfSetIds": null,
        "nfTypes": [
            "SMF"
        ],
        "nsiIdInfos": null,
        "nsiLevelThrds": null,
        "qosRequ": null,
        "qosFlowRetThds": null,
        "ranUeThrouThds": null,
        "repetitionPeriod": 0,
        "snssaia": "N/A",
        "tgtUe": {
            // Not applicable to NETWORK_PERFORMANCE
            "supis": null,
            "intGroupIds": null,
            "anyUe": false
        },
        "congThresholds": null,
        // ---applicable if appIds is provided -----but appIds is not
        // applicable to NetworkPerformance, so default is not provided in which case
        // analytics is for overall traffic as per sk3 doc
        "nwPerfRequ": {
            "nwPerfType": {
                "GNB_ACTIVE_RATIO": null,
                "GNB_COMPUTING_USAGE": null,
                "GNB_MEMORY_USAGE": null,
                "GNB_DISK_USAGE": null,
                "NUM_OF_UE": null,
                "SESS_SUCC_RATIO": null,
                "HO_SUCC_RATIO": null
            },
            // Either "relativeRatio" or "absoluteNum" shall be provided
            "relativeRatio": null,
            "absoluteNum": null
        },
        "bwRequ": null,
        "excepRequ": null,
        "exptAnaType": null,
        "exptUeBehav": null
    }
},
// 29.523 - 5.6.2.4
"evtReq": {
    "immRep": false,
    // default ON_EVENT_DETECTION
    // If thresholds are defined then ON_EVENT_DETECTION , otherwise
    THRESHOLD
    "notifMethod": "ON_EVENT_DETECTION / THRESHOLD",
    "maxReportNbr": 500,
    "monDur": "2022-11-30T23:59:59Z",
    "repPeriod": 10,
    "sampRatio": 75,
    "grpRepTime": 0
},
"notificationURI": "http://100.77.47.210:5002/notification",

```

```

// 29.571 - 5.2.2-3
// as per shared req doc sk3 - 080 for Network Performance
"supportedFeatures": "080",
// applicable if immRep is true
"eventNotifications": {
    "event": "NETWORK_PERFORMANCE",
    "start": "",
    "expiry": "",
    "timeStampGen": "",
    // If the requested period identified by the "startTs" and "endTs"
    // attributes in the EventReportingRequirement type is a future time period,
    // which means the analytics result is a prediction. If no sufficient data is
    // collected to provide the confidence of the prediction before the time
    // deadline, the NWDAF shall return a zero confidence
    "nwPerfs": [
        {
            "networkArea": {
                // 29.554 - 5.6.2.8
                "ecgis": null,
                "ncgis": null,
                "gRanNodeIds": null,
                "tais": null
            },
            "nwPerfType": {
                "GNB_ACTIVE_RATIO": null,
                "GNB_COMPUTING_USAGE": null,
                "GNB_MEMORY_USAGE": null,
                "GNB_DISK_USAGE": null,
                "NUM_OF_UE": null,
                "SESS_SUCC_RATIO": null,
                "HO_SUCC_RATIO": null
            },
            "relativeRatio": null,
            "absoluteNum": null,
            "confidence": null
        }
    ]
},
// Supplied by the NWDAF. When available, shall contain the event(s)
// for which the subscription is not successful including the failure reason(s).
"failEventReports": [
    {
        // NwdafEvent
        "event": "NETWORK_PERFORMANCE",
        "failureCode": "UNAVAILABLE_DATA / BOTH_STAT_PRED_NOT_ALLOWED /
        UNSATISFIED_REQUESTED_ANALYTICS_TIME / OTHER"
    }
],
// Either "taiList" or one of "nfId", "nfSetId" shall be provided
"consNfInfo": {
    "nfId": "uuid",
    "nfSetId": "",
    "taiList": [
        {
            "plmnId": {
                // TS 38.413

```

```

        "mcc": "",
        "mnc": ""
    },
    // 38.413
    "tac": ""
}
]
},
// notifCorrId, string, requires support of feature EneNA (seems like
this feature needs to be additionally supported in order to provide
notification correlation id to subscribing NF
"notifCorrId": null
}

```

Example of the Response Body

```

{
  "eventSubscriptions": [
    {
      "anySlice": "N/A",
      "appIds": null,
      "dnns": null,
      "dnais": null,
      "event": "NETWORK_PERFORMANCE",
      // necessary for subscribing to AMF for number of UEs
      "networkArea": // ---applicable if anyUE:true---
      // 29.554 - 5.6.2.8
      {
        "ecgis": [
          {
            "plmnId": {
              "mcc": "611",
              "mnc": "946"
            },
            "eutraCellId": "60De3B8",
            "nid": "2f9CcfEC9a"
          }
        ],
        "ncgis": [
          {
            "plmnId": {
              "mcc": "375",
              "mnc": "36"
            },
            "nrCellId": "eFdEDcE7D",
            "nid": "e5D8B1EbD11"
          }
        ],
        "gRanNodeIds": [
          {
            "plmnId": {
              "mcc": "791",
              "mnc": "230"
            },
            "n3IwfId": "CB1E5ba",

```

```

        "gNbId": {
            "bitLength": 32,
            "gNBValue": "BF6B9E"
        },
        "ngeNbId": "SMacroNGeNB-F5CCC",
        "wagfId": "8f",
        "tngfId": "1a473d3D",
        "nid": "BFbBAabEBD3",
        "eNbId": "MacroeNB-f26ab"
    },
    ],
    "tais": [
        {
            "plmnId": {
                "mcc": "585",
                "mnc": "162"
            },
            "tac": "ebef4B",
            "nid": "fDfC6bbC673"
        }
    ]
},
"extraReportReq": {
    "startTs": "2022-11-23T05:00:30Z",
    "endTs": "2022-11-30T23:59:59Z"
},
"loadLevelThreshold": 0,
// default THRESHOLD
"notificationMethod": "THRESHOLD",
// default CROSSED
"matchingDir": "ASCENDING / DESCENDING / CROSSED",
"nfLoadLvlThds": null,
"nfInstanceIds": null,
"nfSetIds": null,
"nfTypes": [
    "SMF"
],
"nsiIdInfos": null,
"nsiLevelThrds": null,
"qosRequ": null,
"qosFlowRetThds": null,
"ranUeThrouThds": null,
"repetitionPeriod": 0,
"snssaia": "N/A",
"tgtUe": {
    // Not applicable to NETWORK_PERFORMANCE
    "supis": null,
    "intGroupIds": null,
    "anyUe": false
},
"congThresholds": null,
// ----applicable if appIds is provided -----but appIds is not
applicable to NetworkPerformance, so default is not provided in which case
analytics is for overall traffic as per sk3 doc
"nwPerfRequ": {
    "nwPerfType": {

```

```

        "GNB_ACTIVE_RATIO": null,
        "GNB_COMPUTING_USAGE": null,
        "GNB_MEMORY_USAGE": null,
        "GNB_DISK_USAGE": null,
        "NUM_OF_UE": null,
        "SESS_SUCC_RATIO": null,
        "HO_SUCC_RATIO": null
    },
    // Either "relativeRatio" or "absoluteNum" shall be provided
    "relativeRatio": null,
    "absoluteNum": null
},
"bwRequs": null,
"excepRequs": null,
"exptAnaType": null,
"exptUeBehav": null
}
],
// 29.523 - 5.6.2.4
"evtReq": {
    "immRep": false,
    // default ON_EVENT_DETECTION
    // If thresholds are defined then ON_EVENT_DETECTION , otherwise
THRESHOLD
    "notifMethod": "ON_EVENT_DETECTION / THRESHOLD",
    "maxReportNbr": 500,
    "monDur": "2022-11-30T23:59:59Z",
    "repPeriod": 10,
    "sampRatio": 75,
    "grpRepTime": 0
},
"notificationURI": "http://100.77.47.210:5002/notification",
// 29.571 - 5.2.2-3
// as per shared req doc sk3 - 080 for Network Performance
"supportedFeatures": "080",
// applicable if immRep is true
"eventNotifications": {
    "event": "NETWORK_PERFORMANCE",
    "start": "",
    "expiry": "",
    "timeStampGen": "",
    // If the requested period identified by the "startTs" and "endTs"
    // attributes in the EventReportingRequirement type is a future time period,
    // which means the analytics result is a prediction. If no sufficient data is
    // collected to provide the confidence of the prediction before the time
    // deadline, the NWDAF shall return a zero confidence
    "nwPerfs": [
        {
            "networkArea": {
                // 29.554 - 5.6.2.8
                "ecgis": null,
                "ncgis": null,
                "gRanNodeIds": null,
                "tais": null
            },
            "nwPerfType": {

```

```

        "GNB_ACTIVE_RATIO": null,
        "GNB_COMPUTING_USAGE": null,
        "GNB_MEMORY_USAGE": null,
        "GNB_DISK_USAGE": null,
        "NUM_OF_UE": null,
        "SESS_SUCC_RATIO": null,
        "HO_SUCC_RATIO": null
    },
    "relativeRatio": null,
    "absoluteNum": null,
    "confidence": null
}
]
},
// Supplied by the NWDAF. When available, shall contain the event(s)
for which the subscription is not successful including the failure reason(s).
"failEventReports": [
    {
        // NwdafEvent
        "event": "NETWORK_PERFORMANCE",
        "failureCode": "UNAVAILABLE_DATA / BOTH_STAT_PRED_NOT_ALLOWED /
UNSATISFIED_REQUESTED_ANALYTICS_TIME / OTHER"
    }
],
// Either "tailList" or one of "nfId", "nfSetId" shall be provided
"consNfInfo": {
    "nfId": "uuid",
    "nfSetId": "",
    "tailList": [
        {
            "plmnId": {
                // TS 38.413
                "mcc": "",
                "mnc": ""
            },
            // 38.413
            "tac": ""
        }
    ]
},
// notifCorrId, string, requires support of feature EneNA (seems like
this feature needs to be additionally supported in order to provide
notification correlation id to subscribing NF
"notifCorrId": null
}

```

Modify an existing Network Performance Analytics Subscription

This service operation is used to modify an existing Network Performance Analytics subscription.

Type: PUT

URI: {apiroot}:{serverPort}/nnwdafeventsubscription/<api version>/subscriptions/{subscriptionId}

For information on endpoint parameters see, [Table 9-16](#).

Initiated By: Consumers

For information on request body parameters see, [Table 9-17](#)

Table 9-22 Supported Response Codes

Code	Description
204	The subscription resource is successfully updated.
400	Bad Request The request is incorrect and subscription is not updated.
500	Indicates a internal server processing error.

Examples

The following example shows how an NF updates a Network Performance Analytics subscription by submitting a PUT request on the REST resource using cURL.

cURL Command

```
curl --location --request PUT '10.123.159.23:8087/nnwdafeventssubscription/v1/subscriptions/371d8527-dcc9-4179-9d67-82e5c93fc206' \
--header 'Content-Type: application/json' \
--data '{
  "notificationURI": "http://prodcon-1:9282/receive",
  "supportedFeatures": "080",
  "eventSubscriptions": [
    {
      "event": "NETWORK_PERFORMANCE",
      "extraReportReq": {
        "startTs": "2023-03-15T18:00:00Z",
        "endTs": "2023-03-16T18:30:00Z",
        "accuracy": null,
        "sampRatio": 70,
        "maxObjectNbr": 5,
        "maxSupiNbr": 2,
        "timeAnaNeeded": null
      },
      "loadLevelThreshold": 1,
      "nfLoadLvlThds": [
        {
          "congLevel": 20,
          "nfCpuUsage": 90,
          "nfLoadLevel": 11,
          "nfMemoryUsage": 95,
          "nfStorageUsage": 80
        }
      ],
      "notificationMethod": "THRESHOLD",
      "snssaia": [
        {
          "sst": 1,
          "sd": "102030"
        }
      ],
      "tgtUe": {
```

```

        "supis": null,
        "intGroupIds": null,
        "anyUe": true
    },
    "nfInstanceIds": null,
    "nfSetIds": null,
    "matchingDir": "CROSSED",
    "networkArea": {
        "ecgis": [
            {
                "plmnId": {
                    "mcc": "611",
                    "mnc": "946"
                },
                "eutraCellId": "60De3B8",
                "nid": "2f9CcfeEC9a"
            }
        ],
        "ncgis": [
            {
                "plmnId": {
                    "mcc": "375",
                    "mnc": "36"
                },
                "nrCellId": "0E0FB2773",
                "nid": "e5D8B1EbD11"
            }
        ],
        "gRanNodeIds": [
            {
                "plmnId": {
                    "mcc": "791",
                    "mnc": "230"
                },
                "n3IwfId": "CB1E5ba",
                "gNbId": {
                    "bitLength": 32,
                    "gNBValue": "BF6B9E"
                },
                "ngeNbId": "SMacroNGeNB-F5CCC",
                "wagfId": "8f",
                "tngfId": "1a473d3D",
                "nid": "BFbBAabEBD3",
                "eNbId": "MacroeNB-f26ab"
            }
        ],
        "tais": [
            {
                "plmnId": {
                    "mcc": "585",
                    "mnc": "162"
                },
                "tac": "ebef4B",
                "nid": "fDfC6bbC673"
            }
        ]
    ]

```

```

        },
        "nfTypes": [
            "AMF"
        ]
    },
    ],
    "evtReq": {
        "notifMethod": "ONE_TIME",
        "monDur": "2023-04-14T11:10:00Z",
        "immRep": false,
        "maxReportNbr": 2,
        "repPeriod": 1,
        "sampRatio": 70,
        "grpRepTime": 60
    }
}
}'

```

Example of the Request Body

```

{
  "eventSubscriptions": [
    {
      "anySlice": "N/A",
      "appIds": null,
      "dnns": null,
      "dnais": null,
      "event": "NETWORK_PERFORMANCE",
      // necessary for subscribing to AMF for number of UEs
      "networkArea": // ---applicable if anyUE:true---
      // 29.554 - 5.6.2.8
      {
        "ecgis": [
          {
            "plmnId": {
              "mcc": "611",
              "mnc": "946"
            },
            "eutraCellId": "60De3B8",
            "nid": "2f9CcfeEC9a"
          }
        ],
        "ncgis": [
          {
            "plmnId": {
              "mcc": "375",
              "mnc": "36"
            },
            "nrCellId": "eFdEDcE7D",
            "nid": "e5D8B1EbD11"
          }
        ],
        "gRanNodeIds": [
          {
            "plmnId": {
              "mcc": "791",

```

```

        "mnc": "230"
    },
    "n3IwfId": "CB1E5ba",
    "gNbId": {
        "bitLength": 32,
        "gNBValue": "BF6B9E"
    },
    "ngeNbId": "SMacroNGeNB-F5CCC",
    "wagfId": "8f",
    "tngfId": "1a473d3D",
    "nid": "BFbBAabEBD3",
    "eNbId": "MacroeNB-f26ab"
    }
],
"tais": [
    {
        "plmnId": {
            "mcc": "585",
            "mnc": "162"
        },
        "tac": "ebef4B",
        "nid": "fDfC6bbC673"
    }
]
},
"extraReportReq": {
    "startTs": "2022-11-23T05:00:30Z",
    "endTs": "2022-11-30T23:59:59Z"
},
"loadLevelThreshold": 0,
// default THRESHOLD
"notificationMethod": "THRESHOLD",
// default CROSSED
"matchingDir": "ASCENDING / DESCENDING / CROSSED",
"nfLoadLvlThds": null,
"nfInstanceIds": null,
"nfSetIds": null,
"nfTypes": [
    "SMF"
],
"nsiIdInfos": null,
"nsiLevelThrs": null,
"qosRequ": null,
"qosFlowRetThds": null,
"ranUeThrouThds": null,
"repetitionPeriod": 0,
"snssaia": "N/A",
"tgtUe": {
    // Not applicable to NETWORK_PERFORMANCE
    "supis": null,
    "intGroupIds": null,
    "anyUe": false
},
"congThresholds": null,
// ----applicable if appIds is provided ----but appIds is not
applicable to NetworkPerformance, so default is not provided in which case

```

```

analytics is for overall traffic as per sk3 doc
  "nwPerfRequs": {
    "nwPerfType": {
      "GNB_ACTIVE_RATIO": null,
      "GNB_COMPUTING_USAGE": null,
      "GNB_MEMORY_USAGE": null,
      "GNB_DISK_USAGE": null,
      "NUM_OF_UE": null,
      "SESS_SUCC_RATIO": null,
      "HO_SUCC_RATIO": null
    },
    // Either "relativeRatio" or "absoluteNum" shall be provided
    "relativeRatio": null,
    "absoluteNum": null
  },
  "bwRequs": null,
  "excepRequs": null,
  "exptAnaType": null,
  "exptUeBehav": null
}
],
// 29.523 - 5.6.2.4
"evtReq": {
  "immRep": false,
  // default ON_EVENT_DETECTION
  // If thresholds are defined then ON_EVENT_DETECTION , otherwise
THRESHOLD
  "notifMethod": "ON_EVENT_DETECTION / THRESHOLD",
  "maxReportNbr": 500,
  "monDur": "2022-11-30T23:59:59Z",
  "repPeriod": 10,
  "sampRatio": 75,
  "grpRepTime": 0
},
"notificationURI": "http://100.77.47.210:5002/notification",
// 29.571 - 5.2.2-3
// as per shared req doc sk3 - 080 for Network Performance
"supportedFeatures": "080",
// applicable if immRep is true
"eventNotifications": {
  "event": "NETWORK_PERFORMANCE",
  "start": "",
  "expiry": "",
  "timeStampGen": "",
  // If the requested period identified by the "startTs" and "endTs"
attributes in the EventReportingRequirement type is a future time period,
which means the analytics result is a prediction. If no sufficient data is
collected to provide the confidence of the prediction before the time
deadline, the NWDAF shall return a zero confidence
  "nwPerfs": [
    {
      "networkArea": {
        // 29.554 - 5.6.2.8
        "ecgis": null,
        "ncgis": null,
        "gRanNodeIds": null,

```

```

        "tais": null
      },
      "nwPerfType": {
        "GNB_ACTIVE_RATIO": null,
        "GNB_COMPUTING_USAGE": null,
        "GNB_MEMORY_USAGE": null,
        "GNB_DISK_USAGE": null,
        "NUM_OF_UE": null,
        "SESS_SUCC_RATIO": null,
        "HO_SUCC_RATIO": null
      },
      "relativeRatio": null,
      "absoluteNum": null,
      "confidence": null
    }
  ]
},
// Supplied by the NWDAF. When available, shall contain the event(s)
for which the subscription is not successful including the failure reason(s).
"failEventReports": [
  {
    // NwdafEvent
    "event": "NETWORK_PERFORMANCE",
    "failureCode": "UNAVAILABLE_DATA / BOTH_STAT_PRED_NOT_ALLOWED /
UNSATISFIED_REQUESTED_ANALYTICS_TIME / OTHER"
  }
],
// Either "tailList" or one of "nfId", "nfSetId" shall be provided
"consNfInfo": {
  "nfId": "uuid",
  "nfSetId": "",
  "tailList": [
    {
      "plmnId": {
        // TS 38.413
        "mcc": "",
        "mnc": ""
      },
      // 38.413
      "tac": ""
    }
  ]
},
// notifCorrId, string, requires support of feature EneNA (seems like
this feature needs to be additionally supported in order to provide
notification correlation id to subscribing NF
"notifCorrId": null
}

```

Obtain Network Performance Analytics Subscription Information

This service operation is used to obtain information about an existing Network Performance Analytics subscription.

Type: GET

URI: {apiroot}:{serverPort}:/nnwdaf-eventssubscription/<api version>/subscriptions/{subscriptionId}?event-id={analyticsId}&supported-features={supported-features}&tgt-ue={tgt-ue}&event-filter={event-filter}&ana-req={ana-req}

For information on endpoint parameters see, [Table 9-16](#).

Initiated By: Consumers

For information on request body parameters see, [Table 9-17](#)

Examples

The following example shows how an NF gets subscription information by submitting a GET request on the REST resource using cURL.

cURL Command

```
curl --location 'http://10.123.159.29:8080/nnwdaf-analyticsinfo/v1/analytics?event-id=NETWORK_PERFORMANCE&supported-features=080&tgt-ue=%257B%250A%2520%2520%2520%2520%2520%2520%2520%2520%2522supis%2522%253A%2520null%252C%250A%2520%2520%2520%2520%2520%2520%2520%2520%2522intGroupIds%2522%253A%2520null%252C%250A%2520%2520%2520%2520%2520%2520%2520%2520%2522anyUe%2522%253A%2520true%250A%257D&event-filter=%257B%2522anySlice%2522%253Afalse%252C%2522appIds%2522%253A%255B%2522IQPKITNJSE%2522%255D%252C%2522dnns%2522%253A%255B%2522KCRFf30.lafQu2.fOntr02%2522%255D%252C%2522dnais%2522%253A%255B%2522KuDMA.fD0C%2540DgvaY7.dQUxS69.uTvFz6KCRFf30.lafQu2.fOntr02%2522%255D%252C%2522networkArea%2522%253A%257B%2522ecgis%2522%253A%255B%257B%2522plmnId%2522%253A%257B%2522mcc%2522%253A%2522611%2522%252C%2522mnc%2522%253A%2522946%2522%257D%252C%2522eutraCellId%2522%253A%252260De3B8%2522%252C%2522nid%2522%253A%25222f9CcfeEC9a%2522%257D%255D%252C%2522ncgis%2522%253A%255B%257B%2522plmnId%2522%253A%257B%2522mcc%2522%253A%2522375%2522%252C%2522mnc%2522%253A%252236%2522%257D%252C%2522nrCellId%2522%253A%2522eFdEDcE7D%2522%252C%2522nid%2522%253A%2522e5D8B1EbD11%2522%257D%255D%252C%2522gRanNo deIds%2522%253A%255B%257B%2522plmnId%2522%253A%257B%2522mcc%2522%253A%2522791%2522%252C%2522mnc%2522%253A%252230%2522%257D%252C%2522n3IwfId%2522%253A%2522CB1E5ba%2522%252C%2522gNbId%2522%253A%257B%2522bitLength%2522%253A32%252C%2522gNBValue%2522%253A%2522BF6B9E%2522%257D%252C%2522ngeNbId%2522%253A%2522SMacroNGeNB-F5CCC%2522%252C%2522wagfId%2522%253A%25228f%2522%252C%2522tngfId%2522%253A%25221a473d3D%2522%252C%2522nid%2522%253A%2522BFbBAabEBD3%2522%252C%2522eNbId%2522%253A%2522MacroeNB-f26ab%2522%257D%255D%252C%2522tais%2522%253A%255B%257B%2522plmnId%2522%253A%257B%2522mcc%2522%253A%2522585%2522%252C%2522mnc%2522%253A%252216%2522%257D%252C%2522tac%2522%253A%2522ebef4B%2522%252C%2522nid%2522%253A%2522fDfC6bbC673%2522%257D%255D%257D%252C%2522nwPerfTypes%2522%253A%255B%2522NUM_OF_UE%2522%255D%257D&ana-req=%257B%250A%2520%2520%2520%2520%2520%2522startTs%2522%253A%25222020-07-08T12%253A00%253A10.0000021%2522%252C%250A%2520%2520%2520%2520%2520%2522endTs%2522%253A%25222021-12-13T12%253A02%253A05.000000%2522%252C%250A%2520%2520%2520%2520%2520%2522timeAnaNeeded%2522%253A%25222022-12-13T12%253A00%253A01.000000%2522%252C%250A%2520%2520%2520%2520%2520%2522maxObjectNbr%2522%253A0%252C%250A%2520%2520%2520%2520%2520%2522s ampRatio%2522%253A1%250A%257D'
```

Example of the Response Body

```

{
  "eventSubscriptions": [
    {
      "anySlice": "N/A",
      "appIds": null,
      "dnns": null,
      "dnais": null,
      "event": "NETWORK_PERFORMANCE",
      // necessary for subscribing to AMF for number of UEs
      "networkArea": // ---applicable if anyUE:true---
      // 29.554 - 5.6.2.8
      {
        "ecgis": [
          {
            "plmnId": {
              "mcc": "611",
              "mnc": "946"
            },
            "eutraCellId": "60De3B8",
            "nid": "2f9CcfeEC9a"
          }
        ],
        "ncgis": [
          {
            "plmnId": {
              "mcc": "375",
              "mnc": "36"
            },
            "nrCellId": "eFdEDcE7D",
            "nid": "e5D8B1EbD11"
          }
        ],
        "gRanNodeIds": [
          {
            "plmnId": {
              "mcc": "791",
              "mnc": "230"
            },
            "n3IwfId": "CB1E5ba",
            "gNbId": {
              "bitLength": 32,
              "gNBValue": "BF6B9E"
            },
            "ngeNbId": "SMacroNGeNB-F5CCC",
            "wagfId": "8f",
            "tngfId": "1a473d3D",
            "nid": "BFbBAabEBD3",
            "eNbId": "MacroenB-f26ab"
          }
        ],
        "tais": [
          {
            "plmnId": {
              "mcc": "585",

```

```

        "mnc": "162"
    },
    "tac": "ebef4B",
    "nid": "fDfC6bbC673"
}
]
},
"extraReportReq": {
    "startTs": "2022-11-23T05:00:30Z",
    "endTs": "2022-11-30T23:59:59Z"
},
"loadLevelThreshold": 0,
// default THRESHOLD
"notificationMethod": "THRESHOLD",
// default CROSSED
"matchingDir": "ASCENDING / DESCENDING / CROSSED",
"nfLoadLvlThds": null,
"nfInstanceIds": null,
"nfSetIds": null,
"nfTypes": [
    "SMF"
],
"nsiIdInfos": null,
"nsiLevelThrds": null,
"qosRequ": null,
"qosFlowRetThds": null,
"ranUeThrouThds": null,
"repetitionPeriod": 0,
"snssaia": "N/A",
"tgtUe": {
    // Not applicable to NETWORK_PERFORMANCE
    "supis": null,
    "intGroupIds": null,
    "anyUe": false
},
"congThresholds": null,
// ---applicable if appIds is provided ----but appIds is not
// applicable to NetworkPerformance, so default is not provided in which case
// analytics is for overall traffic as per sk3 doc
"nwPerfRequ": {
    "nwPerfType": {
        "GNB_ACTIVE_RATIO": null,
        "GNB_COMPUTING_USAGE": null,
        "GNB_MEMORY_USAGE": null,
        "GNB_DISK_USAGE": null,
        "NUM_OF_UE": null,
        "SESS_SUCC_RATIO": null,
        "HO_SUCC_RATIO": null
    },
    // Either "relativeRatio" or "absoluteNum" shall be provided
    "relativeRatio": null,
    "absoluteNum": null
},
"bwRequ": null,
"exceptRequ": null,
"exptAnaType": null,

```

```

        "exptUeBehav": null
    }
},
// 29.523 - 5.6.2.4
"evtReq": {
    "immRep": false,
    // default ON_EVENT_DETECTION
    // If thresholds are defined then ON_EVENT_DETECTION , otherwise
    THRESHOLD
    "notifMethod": "ON_EVENT_DETECTION / THRESHOLD",
    "maxReportNbr": 500,
    "monDur": "2022-11-30T23:59:59Z",
    "repPeriod": 10,
    "sampRatio": 75,
    "grpRepTime": 0
},
"notificationURI": "http://100.77.47.210:5002/notification",
// 29.571 - 5.2.2-3
// as per shared req doc sk3 - 080 for Network Performance
"supportedFeatures": "080",
// applicable if immRep is true
"eventNotifications": {
    "event": "NETWORK_PERFORMANCE",
    "start": "",
    "expiry": "",
    "timeStampGen": "",
    // If the requested period identified by the "startTs" and "endTs"
    // attributes in the EventReportingRequirement type is a future time period,
    // which means the analytics result is a prediction. If no sufficient data is
    // collected to provide the confidence of the prediction before the time
    // deadline, the NWDAF shall return a zero confidence
    "nwPerfs": [
        {
            "networkArea": {
                // 29.554 - 5.6.2.8
                "ecgis": null,
                "ncgis": null,
                "gRanNodeIds": null,
                "tais": null
            },
            "nwPerfType": {
                "GNB_ACTIVE_RATIO": null,
                "GNB_COMPUTING_USAGE": null,
                "GNB_MEMORY_USAGE": null,
                "GNB_DISK_USAGE": null,
                "NUM_OF_UE": null,
                "SESS_SUCC_RATIO": null,
                "HO_SUCC_RATIO": null
            },
            "relativeRatio": null,
            "absoluteNum": null,
            "confidence": null
        }
    ]
},
// Supplied by the NWDAF. When available, shall contain the event(s)

```

```

for which the subscription is not successful including the failure reason(s).
    "failEventReports": [
        {
            // NwdafEvent
            "event": "NETWORK_PERFORMANCE",
            "failureCode": "UNAVAILABLE_DATA / BOTH_STAT_PRED_NOT_ALLOWED /
UNSATISFIED_REQUESTED_ANALYTICS_TIME / OTHER"
        }
    ],
    // Either "tailList" or one of "nfId", "nfSetId" shall be provided
    "consNfInfo": {
        "nfId": "uuid",
        "nfSetId": "",
        "tailList": [
            {
                "plmnId": {
                    // TS 38.413
                    "mcc": "",
                    "mnc": ""
                },
                // 38.413
                "tac": ""
            }
        ]
    },
    // notifCorrId, string, requires support of feature EneNA (seems like
    this feature needs to be additionally supported in order to provide
    notification correlation id to subscribing NF
    "notifCorrId": null
}

```

Delete an existing Network Performance Analytics Subscription

This service operation is used to delete an existing Network Performance Analytics subscription.

Type: DELETE

URI: {apiroot}:{serverPort}:/nnwdaf-eventssubscription/<api version>/subscriptions/{subscriptionId}

For information on endpoint parameters see, [Table 9-16](#).

Initiated By: Consumers

Table 9-23 Supported Response Codes

Code	Description
204	The subscription resource is successfully deleted.
404	Not found

The following example shows how an NF deletes subscription information by submitting a DELETE request on the REST resource using cURL.

cURL Command

```
curl --location '10.123.159.23:8087/nnwdafeventsubscription/v1/
subscriptions/371d8527-dcc9-4179-9d67-82e5c93fc206'
```

10

OCNWDAF Alerts

This chapter describes the following information about OCNWDAF alerts:

- [OCNWDAF Alert Configuration](#)
- [System Level Alerts](#)
- [Application Level Alerts](#)

10.1 OCNWDAF Alert Configuration


This section describes the measurement based alert rules configuration for OCNWDAF. The Alert Manager uses the Prometheus measurements values as reported by microservices in conditions under alert rules to trigger alerts.

OCNWDAF Alert configuration in Prometheus

The following procedure is used to configure alerts in Prometheus:

1. Download the `ocn-nwdaf-alerting-rules.yaml` file. Edit this file to configure the alert rules. The parameters in the file that can be edited include name of the alert, rules for the alert including alert name and the expression `expr` defined to trigger the alert.
2. Copy the updated `ocn-nwdaf-alerting-rules.yaml` file to Bastion Host.
3. Run the following command:
`kubectl apply -f ocn-nwdaf-alerting-rules.yaml -n ocn-nwdaf`
4. To verify if the Custom Resource Definition (CRD) is created, run the following command:
`kubectl get prometheusrule -n ocn-nwdaf`
5. Verify the alerts in the Prometheus GUI, the alert name and expression is listed. See example below:

Figure 10-1 Prometheus GUI



▼ OCN_NWDAF_DATA_COLLECTION_NOT_RUNNING (0 active)

name: OCN_NWDAF_DATA_COLLECTION_NOT_RUNNING
expr: up{app="ocn-nwdaf-data-collection"} == 0

Alert Rules

The alerts are configured on the Prometheus server. The metrics scraped correspond to a pod that runs a single microservice, so each alert belongs to one of the pods running. Prometheus continuously collects metrics and when any of the alerting rules are met, the alert is triggered. All the alert rules are written in one or multiple `.yaml` files and deployed as described in procedure [OCNWDAF Alert configuration in Prometheus](#). Listed below are the alert rules for the various alerts captured for OCNWDAF:

Status Alert Rule

- name: <ALERT NAME>
rules:

```
- alert: <ALERT NAME>
  expr: up{app="SERVICE LABEL"} == 0
```

Example:

```
- name: OCN_NWDAF_DATA_COLLECTION_NOT_RUNNING
  rules:
    - alert: OCN_NWDAF_DATA_COLLECTION_NOT_RUNNING
      expr: up{app="ocn-nwdaf-data-collection"} == 0
```

Traffic Alert Rule

- Request rate rule:

```
- name: <ALERT NAME>
  rules:
    - alert: <ALERT NAME>
      expr: >
        sum
        without(method,status,outcome,exception,app,instance,container,pod,pod_template_hash) (rate(http_server_requests_seconds_count{uri="<URI ENDPOINT>"}[1m])) > 1000
```

Example:

```
- name: HIGH_ABNORMAL_BEHAVIOUR_REQUEST_RATE
  rules:
    - alert: HIGH_ABNORMAL_BEHAVIOUR_REQUEST_RATE
      expr: sum
      without(method,status,outcome,exception,app,instance,container,pod,pod_template_hash) (rate(http_server_requests_seconds_count{uri="nnwdaf-analyticsinfo/v1/analytics?event-id=ABNORMAL_BEHAVIOUR"}[1m])) > 1000
```

- Failure rate request rule:

```
- name: <ALERT NAME>
  rules:
    - alert: <ALERT NAME>
      expr: >
        (sum
        without(method,outcome,exception,app,instance,container,pod,pod_template_hash) (rate(http_server_requests_seconds_count{uri="<URI ENDPOINT>","status=~"[4-5].."}[1m]))/ ignoring(status) sum
        without(method,status,outcome,exception,app,instance,container,pod,pod_template_hash) (rate(http_server_requests_seconds_count{uri="<URI ENDPOINT>"}[1m])))) * 100 > 70
```

Example:

```
- name: HIGH_ABNORMAL_BEHAVIOUR_REQUEST_FAILURE_RATE
  rules:
    - alert: HIGH_ABNORMAL_BEHAVIOUR_REQUEST_FAILURE_RATE
      expr: (sum
      without(method,outcome,exception,app,instance,container,pod,pod_template_hash
```

```
sh) (rate(http_server_requests_seconds_count{uri="nnwda-f-analyticsinfo/v1/
analytics?event-id=ABNORMAL_BEHAVIOUR",status=~"[4-5].."}[1m]))/
ignoring(status) sum
without(method,status,outcome,exception,app,instance,container,pod,pod_temp
late_hash) (rate(http_server_requests_seconds_count{uri="nnwda-f-
analyticsinfo/v1/analytics?event-id=ABNORMAL_BEHAVIOUR"}[1m])) * 100 > 70
```

CPU Alert Rule

```
- name: <ALERT NAME>
  rules:
    - alert: <ALERT NAME>
      expr: system_cpu_usage{app="<SERVICE LABEL>"} * 100 > 80
```

Example:

```
- name: OCN_NWDAF_DATA_COLLECTION_HIGH_CPU_LOAD
  rules:
    - alert: OCN_NWDAF_DATA_COLLECTION_HIGH_CPU_LOAD
      expr: system_cpu_usage{app="ocn-nwda-f-data-collection"} * 100 > 80
```

JVM Memory Usage Alert Rule

```
- name: <ALERT NAME>
  rules:
    - alert: <ALERT NAME>
      expr: >

      (sum(avg_over_time(jvm_memory_used_bytes{area="heap",app="<SERVICE
LABEL>"} [1m]))/
sum(avg_over_time(jvm_memory_max_bytes{area="heap",app="<SERVICE LABEL>"}
[1m])) * 100 > 80
```

Example:

```
- name: OCN_NWDAF_DATA_COLLECTION_HIGH_JVM_HEAP_MEMORY_USAGE
  rules:
    - alert: OCN_NWDAF_DATA_COLLECTION_HIGH_JVM_HEAP_MEMORY_USAGE
      expr: (sum(avg_over_time(jvm_memory_used_bytes{area="heap",app="ocn-
nwda-f-data-collection"} [1m]))/
sum(avg_over_time(jvm_memory_max_bytes{area="heap",app="ocn-nwda-f-data-
collection"}[1m])) * 100 > 80
```

10.2 System Level Alerts

This section lists the system level alerts.

OCN_NWDAF_ANALYTICS_HIGH_CPU_LOAD**Table 10-1 OCN_NWDAF_ANALYTICS_HIGH_CPU_LOAD**

Field	Details
Description	CPU load is high at the pod where the microservice is running.
Affected Functions	All
Cause	CPU load is more than 80% of the allocated resources.

OCN_NWDAF_COMMUNICATION_HIGH_CPU_LOAD**Table 10-2 OCN_NWDAF_COMMUNICATION_HIGH_CPU_LOAD**

Field	Details
Description	CPU load is high at the pod where the microservice is running.
Affected Functions	All
Cause	CPU load is more than 80% of the allocated resources.

OCN_NWDAF_CONFIGURATION_SERVICE_HIGH_CPU_LOAD**Table 10-3 OCN_NWDAF_CONFIGURATION_SERVICE_HIGH_CPU_LOAD**

Field	Details
Description	CPU load is high at the pod where the microservice is running.
Affected Functions	All
Cause	CPU load is more than 80% of the allocated resources.

OCN_NWDAF_DATA_COLLECTION_HIGH_CPU_LOAD**Table 10-4 OCN_NWDAF_DATA_COLLECTION_HIGH_CPU_LOAD**

Field	Details
Description	CPU load is high at the pod where the microservice is running.
Affected Functions	All
Cause	CPU load is more than 80% of the allocated resources.

OCN_NWDAF_GATEWAY_HIGH_CPU_LOAD**Table 10-5 OCN_NWDAF_GATEWAY_HIGH_CPU_LOAD**

Field	Details
Description	CPU load is high at the pod where the microservice is running.
Affected Functions	All
Cause	CPU load is more than 80% of the allocated resources.

OCN_NWDAF_MTLF_HIGH_CPU_LOAD**Table 10-6 OCN_NWDAF_MTLF_HIGH_CPU_LOAD**

Field	Details
Description	CPU load is high at the pod where the microservice is running.
Affected Functions	All
Cause	CPU load is more than 80% of the allocated resources.

OCN_NWDAF_SUBSCRIPTION_HIGH_CPU_LOAD**Table 10-7 OCN_NWDAF_SUBSCRIPTION_HIGH_CPU_LOAD**

Field	Details
Description	CPU load is high at the pod where the microservice is running.
Affected Functions	All
Cause	CPU load is more than 80% of the allocated resources.

OCN_NWDAF_ANALYTICS_HIGH_JVM_HEAP_MEMORY_USAGE**Table 10-8 OCN_NWDAF_ANALYTICS_HIGH_JVM_HEAP_MEMORY_USAGE**

Field	Details
Description	The average of the memory heap usage is high.
Affected Functions	All
Cause	The heap memory usage is more than the 80%.

OCN_NWDAF_COMMUNICATION_HIGH_JVM_HEAP_MEMORY_USAGE**Table 10-9 OCN_NWDAF_COMMUNICATION_HIGH_JVM_HEAP_MEMORY_USAGE**

Field	Details
Description	The average of the memory heap usage is high.

Table 10-9 (Cont.)**OCN_NWDAF_COMMUNICATION_HIGH_JVM_HEAP_MEMORY_USAGE**

Field	Details
Affected Functions	All
Cause	The heap memory usage is more than the 80%.

OCN_NWDAF_CONFIGURATION_SERVICE_HIGH_JVM_HEAP_MEMORY_USAGE**Table 10-10 OCN_NWDAF_CONFIGURATION_SERVICE_HIGH_JVM_HEAP_MEMORY_USAGE**

Field	Details
Description	The average of the memory heap usage is high.
Affected Functions	All
Cause	The heap memory usage is more than the 80%.

OCN_NWDAF_DATA_COLLECTION_HIGH_JVM_HEAP_MEMORY_USAGE**Table 10-11 OCN_NWDAF_DATA_COLLECTION_HIGH_JVM_HEAP_MEMORY_USAGE**

Field	Details
Description	The average of the memory heap usage is high.
Affected Functions	All
Cause	The heap memory usage is more than the 80%.

OCN_NWDAF_GATEWAY_HIGH_JVM_HEAP_MEMORY_USAGE**Table 10-12 OCN_NWDAF_GATEWAY_HIGH_JVM_HEAP_MEMORY_USAGE**

Field	Details
Description	The average of the memory heap usage is high.
Affected Functions	All
Cause	The heap memory usage is more than the 80%.

OCN_NWDAF_MTLF_HIGH_JVM_HEAP_MEMORY_USAGE**Table 10-13 OCN_NWDAF_MTLF_HIGH_JVM_HEAP_MEMORY_USAGE**

Field	Details
Description	The average of the memory heap usage is high.
Affected Functions	All
Cause	The heap memory usage is more than the 80%.

OCN_NWDAF_SUBSCRIPTION_HIGH_JVM_HEAP_MEMORY_USAGE**Table 10-14 OCN_NWDAF_SUBSCRIPTION_HIGH_JVM_HEAP_MEMORY_USAGE**

Field	Details
Description	The average of the memory heap usage is high.
Affected Functions	All
Cause	The heap memory usage is more than the 80%.

10.3 Application Level Alerts

This section lists the application level alerts.

OCN_NWDAF_ANALYTICS_NOT_RUNNING**Table 10-15 OCN_NWDAF_ANALYTICS_NOT_RUNNING**

Field	Details
Description	The microservice is not available or not reachable.
Cause	Microservice ocn-nwdaf-analytics is down.

OCN_NWDAF_COMMUNICATION_NOT_RUNNING**Table 10-16 OCN_NWDAF_COMMUNICATION_NOT_RUNNING**

Field	Details
Description	The microservice is not available or not reachable.
Cause	Microservice ocn-nwdaf-communication is down.

OCN_NWDAF_CONFIGURATION_SERVICE_NOT_RUNNING**Table 10-17 OCN_NWDAF_CONFIGURATION_SERVICE_NOT_RUNNING**

Field	Details
Description	The microservice is not available or not reachable.
Cause	Microservice ocn-nwdaf-configuration-service is down.

OCN_NWDAF_DATA_COLLECTION_NOT_RUNNING**Table 10-18 OCN_NWDAF_DATA_COLLECTION_NOT_RUNNING**

Field	Details
Description	The microservice is not available or not reachable.
Cause	Microservice ocn-nwdaf-data-collection is down.

OCN_NWDAF_GATEWAY_NOT_RUNNING**Table 10-19 OCN_NWDAF_GATEWAY_NOT_RUNNING**

Field	Details
Description	The microservice is not available or not reachable.
Cause	Microservice ocn-nwdaf-gateway is down.

OCN_NWDAF_MTLF_NOT_RUNNING**Table 10-20 OCN_NWDAF_MTLF_NOT_RUNNING**

Field	Details
Description	The microservice is not available or not reachable.
Cause	Microservice ocn-nwdaf-mtlf is down.

OCN_NWDAF_SUBSCRIPTION_NOT_RUNNING**Table 10-21 OCN_NWDAF_SUBSCRIPTION_NOT_RUNNING**

Field	Details
Description	The microservice is not available or not reachable.
Cause	Microservice ocn-nwdaf-subscription is down.

HIGH_ABNORMAL_BEHAVIOUR_REQUEST_RATE**Table 10-22 HIGH_ABNORMAL_BEHAVIOUR_REQUEST_RATE**

Field	Details
Description	The number of requests received per second is high.
Cause	Traffic is high, above 1000 requests per second.
URI Endpoint	nnwdaf-analyticsinfo/v1/analytics? event-id=ABNORMAL_BEHAVIOUR
Affected Functions	ABNORMAL_BEHAVIOUR

HIGH_UE_MOBILITY_REQUEST_RATE**Table 10-23 HIGH_UE_MOBILITY_REQUEST_RATE**

Field	Details
Description	The number of requests received per second is high.
Cause	Traffic is high, above 1000 requests per second.
URI Endpoint	nnwdaf-analyticsinfo/v1/analytics? event-id=UE_MOBILITY
Affected Functions	UE_MOBILITY

HIGH_EVENT_SUBSCRIPTION_REQUEST_RATE**Table 10-24 HIGH_EVENT_SUBSCRIPTION_REQUEST_RATE**

Field	Details
Description	The number of requests received per second is high.
Cause	Traffic is high, above 1000 requests per second.
URI Endpoint	nnwdaf-eventssubscription/v1/subscriptions
Affected Functions	UE_MOBILITY, SLICE_LOAD_LEVEL, ABNORMAL_BEHAVIOUR

HIGH_ABNORMAL_BEHAVIOUR_REQUEST_FAILURE_RATE**Table 10-25 HIGH_ABNORMAL_BEHAVIOUR_REQUEST_FAILURE_RATE**

Field	Details
Description	The number of requests failing per second is high.
Cause	The request failing rate is more than the 70%.
URI Endpoint	nnwdaf-analyticsinfo/v1/analytics?event-id=ABNORMAL_BEHAVIOUR
Affected Functions	ABNORMAL_BEHAVIOUR

HIGH_UE_MOBILITY_REQUEST_FAILURE_RATE**Table 10-26 HIGH_ABNORMAL_BEHAVIOUR_REQUEST_FAILURE_RATE**

Field	Details
Description	The number of requests failing per second is high.
Cause	The request failing rate is more than the 70%.
URI Endpoint	nnwdaf-analyticsinfo/v1/analytics?event-id=UE_MOBILITY
Affected Functions	UE_MOBILITY

HIGH_EVENT_SUBSCRIPTION_REQUEST_FAILURE_RATE**Table 10-27 HIGH_EVENT_SUBSCRIPTION_REQUEST_FAILURE_RATE**

Field	Details
Description	The number of requests failing per second is high.
Cause	The request failing rate is more than the 70%.
URI Endpoint	nnwdaf-eventssubscription/v1/subscriptions
Affected Functions	UE_MOBILITY, SLICE_LOAD_LEVEL, ABNORMAL_BEHAVIOUR