

**Oracle Utilities Testing Accelerator**  
**Reference Guide for Oracle Utilities Customer**  
**Cloud Service**

Release 23C

**F90577-01**

December 2023

Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Cloud Service

F90577-01

Copyright © 2000, 2023 Oracle and/or its affiliates.

---

---

# Contents

<b>Preface</b> .....	<b>i</b>
Audience .....	ii
Related Documents .....	ii
Updates to the Documentation .....	ii
Documentation Accessibility .....	ii
Conventions.....	iii
Abbreviations .....	iii
<b>Chapter 1</b>	
<b>Component Reference</b> .....	<b>1-1</b>
Overview .....	1-2
Components .....	1-2
<b>Appendix A</b>	
<b>Inbound Web Services</b> .....	<b>A-1</b>
Pre-requisites .....	A-2
List of Inbound Web Services .....	A-2
<b>Appendix B</b>	
<b>Identifying Fields For a Web Service Request</b> .....	<b>B-1</b>
Debug Mode in the Application.....	B-2
IE Development Tool Bar .....	B-5
SOAP UI.....	B-8

---

---

# Preface

Welcome to the Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Cloud Service for release 23C.

This guide describes the Oracle Utilities Customer Cloud Service 23C components and function libraries used to create those components in Oracle Utilities Testing Accelerator. These components are used to build test flows in Oracle Utilities Testing Accelerator Workbench.

The preface includes the following sections:

- [Audience](#)
- [Related Documents](#)
- [Updates to the Documentation](#)
- [Documentation Accessibility](#)
- [Conventions](#)
- [Abbreviations](#)

---

## Audience

This guide is intended for QA/Test Engineers and Automation Developers to understand the various components and libraries available for them to automate the business test flows for Oracle Utilities Customer to Meter using Oracle Utilities Testing Accelerator for Oracle Utilities Customer to Meter.

## Related Documents

For more information, refer to the following Oracle resources.

- *Oracle Utilities Testing Accelerator User's Guide for Cloud*
- *Oracle Utilities Testing Accelerator Reference Guide for Core*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Billing Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Rate Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Care and Billing Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Meter Solution Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Work and Asset Cloud Service*

See also:

- Oracle Utilities Customer to Meter Documentation Library
- Oracle Utilities Customer Care and Billing Documentation Library
- Oracle Utilities Meter Data Management Library

## Updates to the Documentation

Documentation updates are posted on [Oracle Help Center](#) as they become available.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the [Oracle's Accessibility Program](#) website.

### Access to Oracle Support

Oracle customers have access to electronic support through [My Oracle Support](#). If you are hearing impaired, visit the [Oracle Accessibility Learning and Support](#) website for more information.

## Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

## Abbreviations

The following terms are used in this document:

Term	Expanded Form
MDM	Oracle Utilities Meter Data Management
SGG	Oracle Utilities Smart Grid Gateway
CCB	Oracle Utilities Customer Care and Billing
ODM	Oracle Utilities Operational Device Management
C2M	Oracle Utilities Customer to Meter
OUTA/UTA	Oracle Utilities Testing Accelerator

# Chapter 1

---

## Component Reference

This chapter lists the Oracle Utilities Customer Cloud Service starter components available to create flows in Oracle Utilities Testing Accelerator Workbench for testing the Oracle Utilities Customer Cloud Service applications. It includes the following sections:

- [Overview](#)
- [Components](#)

# Overview

Oracle Utilities Testing Accelerator for Oracle Utilities Customer Cloud Service is a test starter pack built on top of Oracle Utilities Testing Accelerator that generates test automation scripts using Oracle Utilities Testing Accelerator Workbench.

Oracle Utilities Testing Accelerator for Oracle Utilities Customer Cloud Service contains out-of-the-box product-specific components used to build new test flows in Oracle Utilities Testing Accelerator Workbench to test the Oracle Utilities Customer Cloud Service applications. These out-of-the-box components correspond to specific business entities, such as business objects, service scripts, or business services used for interfacing with the application. Users can use these components as available or can extend them. Users can also create new components to be used to create flows. This starter pack also contains a set of function libraries that can be used for creating custom components.

Consider this pack to be a starter kit which can be expanded and built upon. A few sample flows are included as an example.

For more information about creating components and flows, refer to the *Oracle Utilities Testing Accelerator User's Guide* available on the [Oracle Utilities Testing Accelerator for Cloud Services](#) page on [Oracle Help Center](#).

## Components

This section lists the starter components available for Oracle Utilities Customer Cloud Service.

**Pre-requisites:** The Inbound Web Service using the respective business object should be available in the application.

**Additional Notes:** Failure while creating, reading, or updating the component is logged in the test execution report, thus facilitating debugging/analysis of the problem.

The components are categorized under the following functional areas:

- [ADK Master Data](#)
- [Admin](#)
- [Asset Management](#)
- [Bill Determinants](#)
- [Communication](#)
- [Credit and Collection](#)
- [Customer Information](#)
- [Digital Asset Cloud Service](#)[Digital Asset Cloud Service](#)
- [Data Model](#)
- [Data Synchronization](#)
- [Field Order](#)
- [Extendable Lookup](#)
- [Financial](#)



- [General](#)
- [Master Configuration](#)
- [Initial Measurement Data](#)
- [Integration](#)
- [Itron Master Data](#)
- [Itron Admin Data](#)
- [Landis + Gyr Admin Data](#)
- [Landis + Gyr Master Data](#)
- [Rates](#)
- [SMDF Admin Data](#)
- [SMDF Master](#)
- [SSN Admin Data](#)
- [SSN Master Data](#)
- [Sales and Marketing](#)
- [Self Service](#)
- [Sensus Admin Data](#)
- [Sensus Master Data](#)
- [Service Order Management](#)
- [Service Task Type](#)
- [Contract and Products](#)
- [Umbrella Agreement](#)
- [Usage](#)
- [CX REST API](#)
- [Market Settlements Management](#)

## ADK Master Data

Component	Description
DG-ConDisconStChgNotification	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Connect Disconnect State Change Notification record.</p> <p>This component invokes the DG-ConnectDisconStateChgNtfBusiness Object using the ATDGConnectDisconStateChgNtf Inbound Web Service.</p>
DG-OutageDetectionEventNotification	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Outage Detection Event Notification record.</p> <p>This component invokes the DG-OutageDetectEvtNotification Business Object using the ATDGOutageDetectEvtNotification Inbound Web Service.</p>
DG-SmartMeter	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a SmartMeter record.</p> <p>This component invokes the DG- SmartMeter using the ATDGSmartMeter Inbound Web Service.</p>
DG-ReadingChangedNotification	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Reading Change Notification record.</p> <p>This component invokes the DG-ReadingChgNotificationBusiness Object using the ATDGReadingChgNotification Inbound Web Service.</p>

## Admin

Component	Description
C1-AdjustmentTypeAdd	<p>Used to add an Adjustment Type record.</p> <p>This component invokes the ATC1AdjustmentType Inbound Web Service using the C1-AdjTypePhysicalBO Business Object.</p>
C1-AdjustmentTypeRead	<p>Used to read an Adjustment Type record.</p> <p>This component invokes the ATC1AdjustmentType Inbound Web Service using the C1-AdjTypePhysicalBO Business Object.</p>

Component	Description
C1-AdjustmentTypeUpdate	Used to update an Adjustment Type record.  This component invokes the ATC1AdjustmentType Inbound Web Service using the C1-AdjTypePhysicalBO Business Object.
C1-CSRTSvcEligCriteriaAdd	Used to add a CS Request Type Svc Eligibility Criteria record.  This component invokes the ATC1CSRTSvcEligCriteria Inbound Web Service using the C1-CSRTSvcEligCriteria Business Object.
C1-CSRTSvcEligCriteriaDelete	Used to delete a CS Request Type Svc Eligibility Criteria record.  This component invokes the ATC1CSRTSvcEligCriteria Inbound Web Service using the C1-CSRTSvcEligCriteria Business Object.
C1-CSRTSvcEligCriteriaRead	Used to read a CS Request Type Svc Eligibility Criteria record.  This component invokes the ATC1CSRTSvcEligCriteria Inbound Web Service using the C1-CSRTSvcEligCriteria Business Object.
C1-CSRTSvcEligCriteriaUpdate	Used to update a CS Request Type Svc Eligibility Criteria record  This component invokes the ATC1CSRTSvcEligCriteria Inbound Web Service using the C1-CSRTSvcEligCriteria Business Object.
C1-CSRTRelUpdAdd	Used to add a CS Request Type Related Update record.  This component invokes the ATC1CSRTRelUpd Inbound Web Service using the C1-CSRTRelUpd Business Object.
C1-AdjustmentTypeDelete	Used to delete an Adjustment Type record.  This component invokes the ATC1AdjustmentType Inbound Web Service using the C1-AdjTypePhysicalBO Business Object.
C1-NotifTypeTmplIndividualPushAdd	Used to add a Template-Based Individual Push Notification Type.  This component invokes the ATC1NotifTypeTmplIndividualPush Inbound Web Service using the C1-NotifTypeTmplIndividualPush Business Object.

Component	Description
C1-NotifTypeTmplIndividualPushDelete	<p>Used to delete a Template-Based Individual Push Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplIndividualPush Inbound Web Service using the C1-NotifTypeTmplIndividualPush Business Object.</p>
C1-NotifTypeTmplIndividualPushRead	<p>Used to read a Template-Based Individual Push Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplIndividualPush Inbound Web Service using the C1-NotifTypeTmplIndividualPush Business Object.</p>
C1-NotifTypeTmplIndividualPushUpdate	<p>Used to update a Template-Based Individual Push Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplIndividualPush Inbound Web Service using the C1-NotifTypeTmplIndividualPush Business Object.</p>
C1-NotificationTypeAdd	<p>Used to add a Notification Type.</p> <p>This component invokes the ATC1NotificationType Inbound Web Service using the C1-NotificationType Business Object.</p>
C1-NotificationTypeRead	<p>Used to read a Notification Type.</p> <p>This component invokes the ATC1NotificationType Inbound Web Service using the C1-NotificationType Business Object.</p>
C1-NotificationTypeDelete	<p>Used to delete a Notification Type.</p> <p>This component invokes the ATC1NotificationType Inbound Web Service using the C1-NotificationType Business Object.</p>
C1-NotificationTypeUpdate	<p>Used to update a Notification Type.</p> <p>This component invokes the ATC1NotificationType Inbound Web Service using the C1-NotificationType Business Object.</p>
C1-NotifTypeTmplParentPushAdd	<p>Used to add a Template-Based Parent Push Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplParentPush Inbound Web Service using the C1-NotifTypeTmplParentPush Business Object.</p>

Component	Description
C1-NotifTypeTmplParentPushDelete	<p>Used to delete a Template-Based Parent Push Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplParentPush Inbound Web Service using the C1-NotifTypeTmplParentPush Business Object.</p>
C1-NotifTypeTmplParentPushRead	<p>Used to Read a Template-Based Parent Push Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplParentPush Inbound Web Service using the C1-NotifTypeTmplParentPush Business Object.</p>
C1-NotifTypeTmplParentPushUpdate	<p>Used to update a Template-Based Parent Push Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplParentPush Inbound Web Service using the C1-NotifTypeTmplParentPush Business Object.</p>
C1-NotifTypeTmplSubscriptionAdd	<p>Used to add a Template-Based Subscription Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplSubscription Inbound Web Service using the C1-NotifTypeTmplSubscription Business Object.</p>
C1-NotifTypeTmplSubscriptionDelete	<p>Used to delete a Template-Based Subscription Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplSubscription Inbound Web Service using the C1-NotifTypeTmplSubscription Business Object.</p>
C1-NotifTypeTmplSubscriptionRead	<p>Used to read a Template-Based Subscription Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplSubscription Inbound Web Service using the C1-NotifTypeTmplSubscription Business Object.</p>
C1-NotifTypeTmplSubscriptionUpdate	<p>Used to update a Template-Based Subscription Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplSubscription Inbound Web Service using the C1-NotifTypeTmplSubscription Business Object.</p>

Component	Description
C1-NotifTypeTmplSubscriptionDelete	<p>Used to delete a Template-Based Subscription Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplSubscription Inbound Web Service using the C1-NotifTypeTmplSubscription Business Object.</p>
C1-NotifTypeTmplSubscriptionRead	<p>Used to read a Template-Based Subscription Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplSubscription Inbound Web Service using the C1-NotifTypeTmplSubscription Business Object.</p>
C1-NotifTypeTmplSubscriptionUpdate	<p>Used to update a Template-Based Subscription Notification Type.</p> <p>This component invokes the ATC1NotifTypeTmplSubscription Inbound Web Service using the C1-NotifTypeTmplSubscription Business Object.</p>
C1-GetNotificationType	<p>Used for Retrieving Notification Type in Notification.</p> <p>Notification Master Configuration &gt; Edge Application Notification</p> <p>This component invokes the ATC1GetNotificationType Inbound Web Service using the C1-GETNTFTYP Business Service.</p>
C1-GetOutboundMsgType	<p>Used for Retrieving Outbound Message Type in Notification Preference Master Configuration &gt; Edge Application Notification.</p> <p>This component invokes the ATC1GetNotificationType Inbound Web Service using the C1RetOutMsg Service Script.</p>
C1-SATypeAdd	<p>Used to add a SA Type SA Relationship Type record.</p> <p>This component invokes the ATC1SATypeSARelationshipType Inbound Web Service using the C1-SATypeSARelationshipType Business Object.</p>
C1-SATypeRead	<p>Used to add a SA Type SA Relationship Type record.</p> <p>This component invokes the ATC1SATypeSARelationshipType Inbound Web Service using the C1-SATypeSARelationshipType Business Object.</p>

Component	Description
C1-AutoPayRouteTypeAdd	<p>Used to add an Auto Pay Route Type record.</p> <p>This component invokes the ATC1AutoPayRouteType Inbound Web Service using the C1-AutoPayRouteTypePhysicalBO Business Object.</p>
C1-AutoPayRouteRead	<p>Used to read an Auto Pay Route Type record.</p> <p>This component invokes the ATC1AutoPayRouteType Inbound Web Service using the C1-AutoPayRouteTypePhysicalBO Business Object.</p>
C1-AutoPayRouteUpdate	<p>Used to update an Auto Pay Route Type record.</p> <p>This component invokes the ATC1AutoPayRouteType Inbound Web Service using the C1-AutoPayRouteTypePhysicalBO Business Object.</p>
C1-AutoPayRouteDelete	<p>Used to delete an Auto Pay Route Type record.</p> <p>This component invokes the ATC1AutoPayRouteType Inbound Web Service using the C1-AutoPayRouteTypePhysicalBO Business Object.</p>
C1-AutoPaySourceAdd	<p>Used to add an Auto Pay Source record.</p> <p>This component invokes the ATC1AutoPaySource Inbound Web Service using the C1-AutoPaySourcePhysicalBO Business Object.</p>
C1-AutoPaySourceDelete	<p>Used to Delete an Auto Pay Source record.</p> <p>This component invokes the ATC1AutoPaySource Inbound Web Service using the C1-AutoPaySourcePhysicalBO Business Object.</p>
C1-AutoPaySourceRead	<p>Used to read an Auto Pay Source record.</p> <p>This component invokes the ATC1AutoPaySource Inbound Web Service using the C1-AutoPaySourcePhysicalBO Business Object.</p>
C1-AutoPaySourceUpdate	<p>Used to Update an Auto Pay Source record.</p> <p>This component invokes the ATC1AutoPaySource Inbound Web Service using the C1-AutoPaySourcePhysicalBO Business Object.</p>

Component	Description
C1-StartServiceRequestTypeAdd	Used to add a Start Service Request Type record.  This component invokes the ATC1StartServiceRequestType Inbound Web Service using the C1-StartServiceRequestType Business Object.
C1-StartServiceRequestTypeDelete	Used to delete a Start Service Request Type record.  This component invokes the ATC1StartServiceRequestType Inbound Web Service using the C1-StartServiceRequestType Business Object.
C1-StartServiceRequestTypeRead	Used to read a Start Service Request Type record.  This component invokes the ATC1StartServiceRequestType Inbound Web Service using the C1-StartServiceRequestType Business Object.
C1-StopServiceRequestTypeAdd	Used to add a Start Service Request Type record.  This component invokes the ATC1StartServiceRequestType Inbound Web Service using the C1-StartServiceRequestType Business Object.
C1-StopServiceRequestTypeDelete	Used to delete a Start Service Request Type record.  This component invokes the ATC1StartServiceRequestType Inbound Web Service using the C1-StartServiceRequestType Business Object.
C1-StopServiceRequestTypeRead	Used to read a Start Service Request Type record.  This component invokes the ATC1StartServiceRequestType Inbound Web Service using the C1-StartServiceRequestType Business Object.
C1-StopServiceRequestTypeUpdate	Used to update a Start Service Request Type record.  This component invokes the ATC1StartServiceRequestType Inbound Web Service using the C1-StartServiceRequestType Business Object.
C1-TransferServiceRequestTypeAdd	Used to add a Transfer Service Request Type record.  This component invokes the ATC1TransferServiceRequestType Inbound Web Service using the C1-TransferServiceRequestType Business Object.



Component	Description
C1-TransferServiceRequestTypeDelete	<p>Used to delete a Transfer Service Request Type record.</p> <p>This component invokes the ATC1TransferServiceRequestType Inbound Web Service using the C1-TransferServiceRequestType Business Object.</p>
C1-TransferServiceRequestTypeRead	<p>Used to read a Transfer Service Request Type record.</p> <p>This component invokes the ATC1TransferServiceRequestType Inbound Web Service using the C1-TransferServiceRequestType Business Object.</p>
C1-TransferServiceRequestTypeUpdate	<p>Used to delete a Transfer Service Request Type record.</p> <p>This component invokes the ATC1TransferServiceRequestType Inbound Web Service using the C1-TransferServiceRequestType Business Object.</p>
C1-OutageCallWithoutPremAdd	<p>Used to create an Outage Call without Premise record.</p> <p>This component invokes the ATC1OutageCallWithoutPremInbound Web Service using the C1-OutageCallWithoutPremiseBusiness Object.</p>
C1-OutageCallWithoutPremRead	<p>Used to read an Outage Call without Premise record.</p> <p>This component invokes the ATC1OutageCallWithoutPremInbound Web Service using the C1-OutageCallWithoutPremiseBusiness Object.</p>
C1-OutageCallWithPremAdd	<p>Used to create an Outage Call with Premise record.</p> <p>This component invokes the ATC1OutageCallWithPremInbound Web Service using the C1-OutageCallWithPremiseBusiness Object.</p>
C1-OutageCallWithPremRead	<p>Used to read an Outage Call with Premise record.</p> <p>This component invokes the ATC1OutageCallWithPremInbound Web Service using the C1-OutageCallWithPremiseBusiness Object.</p>

Component	Description
C1-CaseTypeAdd	Used to add a Case Type record.  This component invokes the ATC1CaseType Inbound Web Service using the C1-CaseTypePhysicalBO Business Object.
C1-CaseTypeRead	Used to read a Case Type record.  This component invokes the ATC1CaseType Inbound Web Service using the C1-CaseTypePhysicalBO Business Object.
C1-CaseTypeUpdate	Used to update a Case Type record.  This component invokes the ATC1CaseType Inbound Web Service using the C1-CaseTypePhysicalBO Business Object.
C1-CaseTypeDelete	Used to delete a Case Type record.  This component invokes the ATC1CaseType Inbound Web Service using the C1-CaseTypePhysicalBO Business Object.
C1-CaseCreate	Used to Create Case.  This component invokes the C1-Case Inbound Web Service using the C1-Case Service Script.
C1-CaseDelete	Used to Delete Case.  This component invokes the C1-Case Inbound Web Service using the C1-DelCase Service Script.
C1-CaseGet	Used to Get Case.  This component invokes the C1-Case Inbound Web Service using the C1-DelCase Service Script.
C1-CaseUpdate	Used to Update Case.  This component invokes the C1-Case Inbound Web Service using the C1-Case Service Script.
C1-AdjustmentTypeProfileAdd	Used to add an Adjustment Type Profile record.  This component invokes the ATC1AdjustmentTypeProfile Inbound Web Service using the C1-AdjTypeProfPhysicalBO Business Object.
C1-AdjustmentTypeProfileDelete	Used to delete an Adjustment Type Profile record.  This component invokes the ATC1AdjustmentTypeProfile Inbound Web Service using the C1-AdjTypeProfPhysicalBO Business Object.

Component	Description
C1-AdjustmentTypeProfileRead	Used to read an Adjustment Type Profile record.  This component invokes the ATC1AdjustmentTypeProfile Inbound Web Service using the C1-AdjTypeProfPhysicalBO Business Object.
C1-AdjustmentTypeProfileUpdate	Used to update an Adjustment Type Profile record.  This component invokes the ATC1AdjustmentTypeProfile Inbound Web Service using the C1-AdjTypeProfPhysicalBO Business Object.
C1-BillRouteTypeAdd	Used to add a Bill Route Type record.  This component invokes the ATC1BillRouteType Inbound Web Service using the C1-BillRouteTypePhysicalBO Business Object.
C1-BillRouteTypeDelete	Used to delete a Bill Route Type record.  This component invokes the ATC1BillRouteType Inbound Web Service using the C1-BillRouteTypePhysicalBO Business Object.
C1-BillRouteTypeRead	Used to read a Bill Route Type record.  This component invokes the ATC1BillRouteType Inbound Web Service using the C1-BillRouteTypePhysicalBO Business Object.
C1-BillRouteTypeUpdate	Used to update a Bill Route Type record.  This component invokes the ATC1BillRouteType Inbound Web Service using the C1-BillRouteTypePhysicalBO Business Object.
C1-CreatePersonForCheckGG_NENE	Used to Create Person For Check.  This component invokes the C1-Person Inbound Web Service using the C1-Person Service Script.
C1-CreatePersonForCheckGL_NENE	Used to Create Person For Check.  This component invokes the C1-Person Inbound Web Service using the C1-Person Service Script.
C1-CharacteristicTypeAdd	Used to add a Characteristic Type record.  This component invokes the ATC1CharacteristicType Inbound Web Service using the F1-CharTypePhysicalBO Business Object.

Component	Description
C1-CharacteristicTypeDelete	Used to delete a Characteristic Type record.  This component invokes the ATC1CharacteristicType Inbound Web Service using the F1-CharTypePhysicalBO Business Object.
C1-CharacteristicTypeRead	Used to read a Characteristic Type record.  This component invokes the ATC1CharacteristicType Inbound Web Service using the F1-CharTypePhysicalBO Business Object.
C1-CharacteristicTypeUpdate	Used to update a Characteristic Type record.  This component invokes the ATC1CharacteristicType Inbound Web Service using the F1-CharTypePhysicalBO Business Object.
C1-CollectionClassControlAdd	Used to add a Collection Class Control record.  This component invokes the ATC1CollectionClassControl Inbound Web Service using the C1-CollClassControlPhysicalBO Business Object.
C1-CollectionClassControlDelete	Used to delete a Collection Class Control record.  This component invokes the ATC1CollectionClassControl Inbound Web Service using the C1-CollClassControlPhysicalBO Business Object.
C1-CollectionClassControlRead	Used to read a Collection Class Control record.  This component invokes the ATC1CollectionClassControl Inbound Web Service using the C1-CollClassControlPhysicalBO Business Object.
C1-CollectionClassControlUpdate	Used to update a Collection Class Control record.  This component invokes the ATC1CollectionClassControl Inbound Web Service using the C1-CollClassControlPhysicalBO Business Object.
C1-CSRTRelUpdAdd	Used to add a CS Request Type Related Update record.  This component invokes the ATC1CSRTRelUpd Inbound Web Service using the C1-CSRTRelUpd Business Object.

Component	Description
C1-CSRTRelUpdDelete	<p>Used to delete a CS Request Type Related Update record.</p> <p>This component invokes the ATC1CSRTRelUpd Inbound Web Service using the C1-CSRTRelUpd Business Object.</p>
C1-CSRTRelUpdRead	<p>Used to read a CS Request Type Related Update record.</p> <p>This component invokes the ATC1CSRTRelUpd Inbound Web Service using the C1-CSRTRelUpd Business Object.</p>
C1-CSRTRelUpdUpdate	<p>Used to update a CS Request Type Related Update record.</p> <p>This component invokes the ATC1CSRTRelUpd Inbound Web Service using the C1-CSRTRelUpd Business Object.</p>
C1-CSRTQuestionAdd	<p>Used to add a CSR Type Question record.</p> <p>This component invokes the ATC1CSRTQuestion Inbound Web Service using the C1-CSRTQuestion Business Object.</p>
C1-CSRTQuestionDelete	<p>Used to delete a CSR Type Question record.</p> <p>This component invokes the ATC1CSRTQuestion Inbound Web Service using the C1-CSRTQuestion Business Object.</p>
C1-CSRTQuestionRead	<p>Used to read a CSR Type Question record.</p> <p>This component invokes the ATC1CSRTQuestion Inbound Web Service using the C1-CSRTQuestion Business Object.</p>
C1-CSRTQuestionUpdate	<p>Used to update a CSR Type Question record.</p> <p>This component invokes the ATC1CSRTQuestion Inbound Web Service using the C1-CSRTQuestion Business Object.</p>
C1-CSRTRelUpdAdd	<p>Used to add a CS Request Type Related Update record.</p> <p>This component invokes the ATC1CSRTRelUpd Inbound Web Service using the C1-CSRTRelUpd Business Object.</p>

Component	Description
C1-CSRTRelUpdDelete	<p>Used to delete a CS Request Type Related Update record.</p> <p>This component invokes the ATC1CSRTRelUpd Inbound Web Service using the C1-CSRTRelUpd Business Object.</p>
C1-CSRTRelUpdRead	<p>Used to read a CS Request Type Related Update record.</p> <p>This component invokes the ATC1CSRTRelUpd Inbound Web Service using the C1-CSRTRelUpd Business Object.</p>
C1-CSRTRelUpdUpdate	<p>Used to update a CS Request Type Related Update record.</p> <p>This component invokes the ATC1CSRTRelUpd Inbound Web Service using the C1-CSRTRelUpd Business Object.</p>
C1-CustSvcRequestResponseAdd	<p>Used to add a Cust Svc Request Response record.</p> <p>This component invokes the ATC1CustSvcRequestResponse Inbound Web Service using the C1-CustSvcRequestResponse Business Object.</p>
C1-CustSvcRequestResponseDelete	<p>Used to delete a Cust Svc Request Response record.</p> <p>This component invokes the ATC1CustSvcRequestResponse Inbound Web Service using the C1-CustSvcRequestResponse Business Object.</p>
C1-CustSvcRequestResponseRead	<p>Used to read a Cust Svc Request Response record.</p> <p>This component invokes the ATC1CustSvcRequestResponse Inbound Web Service using the C1-CustSvcRequestResponse Business Object.</p>
C1-CustSvcRequestResponseUpdate	<p>Used to update a Cust Svc Request Response record.</p> <p>This component invokes the ATC1CustSvcRequestResponse Inbound Web Service using the C1-CustSvcRequestResponse Business Object.</p>
C1-MarketAdd	<p>Used to add a Market record.</p> <p>This component invokes the ATC1Market Inbound Web Service using the C1-MarketPhysicalBO Business Object.</p>

Component	Description
C1-MarketDelete	Used to delete a Market record.  This component invokes the ATC1Market Inbound Web Service using the C1-MarketPhysicalBO Business Object.
C1-MarketRead	Used to read a Market record.  This component invokes the ATC1Market Inbound Web Service using the C1-MarketPhysicalBO Business Object.
C1-MarketUpdate	Used to update a Market record.  This component invokes the ATC1Market Inbound Web Service using the C1-MarketPhysicalBO Business Object.
C1-MktProvConfigOptAdd	Used to add a Mkt Prov Config Opt record.  This component invokes the ATC1MktProvConfigOpt Inbound Web Service using the C1-MktProvConfigOpt Business Object.
C1-MktProvConfigOptDelete	Used to delete a Mkt Prov Config Opt record.  This component invokes the ATC1MktProvConfigOpt Inbound Web Service using the C1-MktProvConfigOpt Business Object.
C1-MktProvConfigOptRead	Used to read a Mkt Prov Config Opt record.  This component invokes the ATC1MktProvConfigOpt Inbound Web Service using the C1-MktProvConfigOpt Business Object.
C1-MktProvConfigOptUpdate	Used to update a Mkt Prov Config Opt record.  This component invokes the ATC1MktProvConfigOpt Inbound Web Service using the C1-MktProvConfigOpt Business Object.
C1-ProviderConfigurationOptionAdd	Used to add a Provider Configuration Option record.  This component invokes the ATC1ProviderConfigurationOption Inbound Web Service using the C1-ProviderConfigurationOptionBusiness Service.
C1-ProviderConfigurationOptionDelete	Used to delete a Provider Configuration Option record.  This component invokes the ATC1ProviderConfigurationOption Inbound Web Service using the C1-ProviderConfigurationOptionBusiness Service.

Component	Description
C1-ProviderConfigurationOptionRead	Used to read a Provider Configuration Option record.  This component invokes the ATC1ProviderConfigurationOption Inbound Web Service using the C1-ProviderConfigurationOptionBusiness Service.
C1-ProviderConfigurationOptionUpdate	Used to update a Provider Configuration Option record.  This component invokes the ATC1ProviderConfigurationOption Inbound Web Service using the C1-ProviderConfigurationOptionBusiness Service.
C1-SARelTypeAdd	Used to add a SA Relationship Type record.  This component invokes the ATC1SARelType Inbound Web Service using the C1-SARelTypePhysicalBO Business Object.
C1-SARelTypeDelete	Used to delete a SA Relationship Type record.  This component invokes the ATC1SARelType Inbound Web Service using the C1-SARelTypePhysicalBO Business Object.
C1-SARelTypeRead	Used to read a SA Relationship Type record.  This component invokes the ATC1SARelType Inbound Web Service using the C1-SARelTypePhysicalBO Business Object.
C1-SARelTypeUpdate	Used to update a SA Relationship Type record.  This component invokes the ATC1SARelType Inbound Web Service using the C1-SARelTypePhysicalBO Business Object.
C1-SvcProvMktOptAdd	Used to add a Svc Prov Mkt Opt record.  This component invokes the ATC1SvcProvMktOpt Inbound Web Service using the C1-SvcProvMktOpt Business Object.
C1-SvcProvMktOptDelete	Used to delete a Svc Prov Mkt Opt record.  This component invokes the ATC1SvcProvMktOpt Inbound Web Service using the C1-SvcProvMktOpt Business Object.
C1-SvcProvMktOptRead	Used to read a Svc Prov Mkt Opt record.  This component invokes the ATC1SvcProvMktOpt Inbound Web Service using the C1-SvcProvMktOpt Business Object.



Component	Description
C1-SvcProvMktOptUpdate	Used to update a Svc Prov Mkt Opt record.  This component invokes the ATC1SvcProvMktOpt Inbound Web Service using the C1-SvcProvMktOpt Business Object.
C1-DistributionCodeAdd	Used to add a Distribution Code record.  This component invokes the ATC1DistributionCode Inbound Web Service using the C1-DistributionCodePhysicalBO Business Object.
C1-DistributionCodeDelete	Used to delete a Distribution Code record.  This component invokes the ATC1DistributionCode Inbound Web Service using the C1-DistributionCodePhysicalBO Business Object.
C1-DistributionCodeRead	Used to read a Distribution Code record.  This component invokes the ATC1DistributionCode Inbound Web Service using the C1-DistributionCodePhysicalBO Business Object.
C1-DistributionCodeUpdate	Used to update a Distribution Code record.  This component invokes the ATC1DistributionCode Inbound Web Service using the C1-DistributionCodePhysicalBO Business Object.
C1-CISDivisionAdd	Used to add a CIS Division record.  This component invokes the ATC1CISDivision Inbound Web Service using the C1-CISDivisionPhysicalBO Business Object.
C1-CISDivisionRead	Used to read a CIS Division record.  This component invokes the ATC1CISDivision Inbound Web Service using the C1-CISDivisionPhysicalBO Business Object.
C1-CISDivisionUpdate	Used to update a CIS Division record.  This component invokes the ATC1CISDivision Inbound Web Service using the C1-CISDivisionPhysicalBO Business Object.
C1-CISDivisionDelete	Used to delete a CIS Division record.  This component invokes the ATC1CISDivision Inbound Web Service using the C1-CISDivisionPhysicalBO Business Object.

Component	Description
C1-DispatchGroupAdd	Used to add a Dispatch Group record.  This component invokes the ATC1DispatchGroup Inbound Web Service using the C1-DispatchGroupPhysicalBO Business Object.
C1-DispatchGroupRead	Used to read a Dispatch Group record.  This component invokes the ATC1DispatchGroup Inbound Web Service using the C1-DispatchGroupPhysicalBO Business Object.
C1-DispatchGroupUpdate	Used to update a Dispatch Group record.  This component invokes the ATC1DispatchGroup Inbound Web Service using the C1-DispatchGroupPhysicalBO Business Object.
C1-DispatchGroupDelete	Used to delete a Dispatch Group record.  This component invokes the ATC1DispatchGroup Inbound Web Service using the C1-DispatchGroupPhysicalBO Business Object.
C1-IdentifierTypeAdd	Used to create an Identifier Type record.  This component invokes the ATC1IdentifierType Inbound Web Service using C1-IdentifierTypePhysicalBO Business Object.
C1-GeographicTypeAdd	Used to add a Geographic Type record.  This component invokes the ATC1GeographicType Inbound Web Service using the F1-GeographicTypePhysicalBO Business Object.
C1-GeographicTypeDelete	Used to delete a Geographic Type record.  This component invokes the ATC1GeographicType Inbound Web Service using the F1-GeographicTypePhysicalBO Business Object.
C1-GeographicTypeRead	Used to read a Geographic Type record.  This component invokes the ATC1GeographicType Inbound Web Service using the F1-GeographicTypePhysicalBO Business Object.
C1-GeographicTypeUpdate	Used to update a Geographic Type record.  This component invokes the ATC1GeographicType Inbound Web Service using the F1-GeographicTypePhysicalBO Business Object.

Component	Description
C1-IdentifierTypeDelete	Used to delete an existing Identifier Type record.  This component invokes the ATC1IdentifierType Inbound Web Service using C1-IdentifierTypePhysicalBO Business Object.
C1-IdentifierTypeRead	Used to query an existing Identifier Type record.  This component invokes the ATC1IdentifierType Inbound Web Service using C1-IdentifierTypePhysicalBO Business Object.
C1-IdentifierTypeUpdate	Used to update an existing Identifier Type record.  This component invokes the ATC1IdentifierType Inbound Web Service using C1-IdentifierTypePhysicalBO Business Object.
C1-InsightGroupAdd	Used to add an Insight Group record.  This component invokes the ATC1InsightGroup Inbound Web Service using the F1-InsightGroupPhysicalBO Business Object.
C1-InsightGroupDelete	Used to delete an Insight Group record.  This component invokes the ATC1InsightGroup Inbound Web Service using the F1-InsightGroupPhysicalBO Business Object.
C1-InsightGroupRead	Used to read an Insight Group record.  This component invokes the ATC1InsightGroup Inbound Web Service using the F1-InsightGroupPhysicalBO Business Object.
C1-InsightGroupUpdate	Used to update an Insight Group record.  This component invokes the ATC1InsightGroup Inbound Web Service using the F1-InsightGroupPhysicalBO Business Object.
C1-ItemTypeAdd	Used to add an Item Type record.  This component invokes the ATC1ItemType Inbound Web Service using the C1-ItemTypePhysicalBO Business Object.
C1-ItemTypeRead	Used to read an Item Type record.  This component invokes the ATC1ItemType Inbound Web Service using the C1-ItemTypePhysicalBO Business Object.

Component	Description
C1-ItemTypeUpdate	Used to update an Item Type record.  This component invokes the ATC1ItemType Inbound Web Service using the C1-ItemTypePhysicalBO Business Object.
C1-ItemTypeDelete	Used to delete an Item Type record.  This component invokes the ATC1ItemType Inbound Web Service using the C1-ItemTypePhysicalBO Business Object.
C1-NotificationTypeRead	Used to read a Notification Type.  This component invokes the ATC1NotificationType Inbound Web Service using the C1-NotificationType Business Object.
C1-NotificationTypeDelete	Used to delete a Notification Type.  This component invokes the ATC1NotificationType Inbound Web Service using the C1-NotificationType Business Object.
C1-PaymentTypeLookupAdd	Used to add a Payment Type Lookup record.  This component invokes the ATC1PaymentTypeLookup Inbound Web Service using the C1-PaymentTypeLookup Business Object.
C1-PaymentTypeLookupRead	Used to read a Payment Type Lookup record.  This component invokes the ATC1PaymentTypeLookup Inbound Web Service using the C1-PaymentTypeLookup Business Object.
C1-PaymentTypeLookupUpdate	Used to update a Payment Type Lookup record.  This component invokes the ATC1PaymentTypeLookup Inbound Web Service using the C1-PaymentTypeLookup Business Object.
C1-PaymentTypeLookupDelete	Used to delete a Payment Type Lookup record.  This component invokes the ATC1PaymentTypeLookup Inbound Web Service using the C1-PaymentTypeLookup Business Object.
C1-PersonContactTypeAdd	Used to add a Person Contact Type.  This component invokes the ATC1PersonContactType Inbound Web Service using the C1-PersonContactType Business Object.

Component	Description
C1-PersonContactTypeRead	Used to read a Person Contact Type.  This component invokes the ATC1PersonContactType Inbound Web Service using the C1-PersonContactType Business Object.
C1-PersonContactTypeUpdate	Used to update a Person Contact Type.  This component invokes the ATC1PersonContactType Inbound Web Service using the C1-PersonContactType Business Object.
C1-PersonContactTypeDelete	Used to delete a Person Contact Type.  This component invokes the ATC1PersonContactType Inbound Web Service using the C1-PersonContactType Business Object.
C1-PremiseTypeAdd	Used to read a Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO Business Object.
C1-PremiseTypeRead	Used to read a Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO Business Object.
C1-PremiseTypeUpdate	Used to update a Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO Business Object.
C1-PremiseTypeDelete	Used to Delete a Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO Business Object.
C1-SPTypeAdd	Used to add a SP Type record.  This component invokes the ATC1SPType Inbound Web Service using the C1-SPTypePhysicalBO Business Object.
C1-SPTypeRead	Used to read a SP Type record.  This component invokes the ATC1SPType Inbound Web Service using the C1-SPTypePhysicalBO Business Object.

Component	Description
C1-SPTypeUpdate	Used to update a SP Type record.  This component invokes the ATC1SPType Inbound Web Service using the C1-SPTypePhysicalBO Business Object.
C1-SPTypeDelete	Used to Delete a SP Type record.  This component invokes the ATC1SPType Inbound Web Service using the C1-SPTypePhysicalBO Business Object.
C1-StatementCycleAdd	Used to add a Statement Cycle record.  This component invokes the ATC1StatementCycle Inbound Web Service using the C1-StatementCyclePhysicalBO Business Object.
C1-StatementCycleRead	Used to add a Statement Cycle record.  This component invokes the ATC1StatementCycle Inbound Web Service using the C1-SPTypePhysicalBO Business Object.
C1-StatementCycleUpdate	Used to update a Statement Cycle record.  This component invokes the ATC1StatementCycle Inbound Web Service using the C1-SPTypePhysicalBO Business Object.
C1-StatementCycleDelete	Used to delete a Statement Cycle record.  This component invokes the ATC1StatementCycle Inbound Web Service using the C1-SPTypePhysicalBO Business Object.
X1-UnitOfMeasureAdd	Used to create a CCB Unit Of Measure record.  This component invokes the ATD1UnitOfMeasure Inbound Web Service using D1-UnitOfMeasure Business Object.
X1-UnitOfMeasureDelete	Used to delete an existing CCB Unit Of Measure record.  This component invokes the ATD1UnitOfMeasure Inbound Web Service using D1-UnitOfMeasure Business Object.
D1-CutServiceForNonPaymentTypeAdd	Used to create a Cut Service for Non-Payment Type record.  This component invokes the ATD1CutServiceForNonPaymentType Inbound Web Service using D1-CutServiceForNonPaymentType Business Object.

Component	Description
D1-CutServiceForNonPaymentType Delete	<p>Used to delete an existing Cut Service for Non-Payment Type record.</p> <p>This component invokes the ATD1CutServiceForNonPaymentType Inbound Web Service using D1-CutServiceForNonPaymentType Business Object.</p>
D1-CutServiceForNonPaymentTypeRead	<p>Used to query an existing Cut Service for Non-Payment Type record.</p> <p>This component invokes the ATD1CutServiceForNonPaymentType Inbound Web Service using D1-CutServiceForNonPaymentType Business Object.</p>
D1-CutServiceForNonPaymentType Update	<p>Used to update an existing Cut Service for Non-Payment Type record.</p> <p>This component invokes the ATD1CutServiceForNonPaymentType Inbound Web Service using D1-CutServiceForNonPaymentType Business Object.</p>
D1-AggregatorRoot	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a AggregatorRoot.</p> <p>This component invokes the D1- AggregatorRoot Business Object using the ATD1AggregatorRoot Inbound Web Service.</p>
D1-ActivityStatsAggregator	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a ActivityStatsAggregator.</p> <p>This component invokes the D1- ActivityStatsAggregatorBusiness Object using the ATD1ActivityStatsAggregator Inbound Service.</p>
D1-StatsAggregator	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a StatsAggregator.</p> <p>This component invokes the D1-StatsAggregator Business Object using the ATD1StatsAggregators Inbound Web Service.</p>
D2-ItemAggregatorPostalSvcType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a ItemAggregatorPostalSvcType.</p> <p>This component invokes the D1- ItemAggregatorPostalSvcType bo using the ATD1 ItemAggregatorPostalSvcType Inbound Service.</p>

Component	Description
D1-DisableServiceTypeAdd	Used to create a Disable Service Type record.  This component invokes the ATD1DisableServiceType IWS using D1-DisableServiceType Business Object.
D1-DisableServiceTypeDelete	Used to delete an existing Disable Service Type record.  This component invokes the ATD1DisableServiceType IWS using D1-DisableServiceType Business Object.
D1-DisableServiceTypeRead	Used to query an existing Disable Service Type record.  This component invokes the ATD1DisableServiceType IWS using D1-DisableServiceType Business Object.
D1-DisableServiceTypeUpdate	Used to update an existing Disable Service Type record.  This component invokes the ATD1DisableServiceType IWS using D1-DisableServiceType Business Object.
D1-EnableServiceTypeAdd	Used to create an Enable Service Type record.  This component invokes the ATD1EnableServiceType IWS using D1-EnableServiceType Business Object.
D1-EnableServiceTypeDelete	Used to delete an existing Enable Service Type record.  This component invokes the ATD1EnableServiceType IWS using D1-EnableServiceType Business Object.
D1-EnableServiceTypeRead	Used to query an existing Enable Service Type record.  This component invokes the ATD1EnableServiceType IWS using D1-EnableServiceType Business Object.
D1-EnableServiceTypeUpdate	Used to update an existing Enable Service Type record.  This component invokes the ATD1EnableServiceType IWS using D1-EnableServiceType Business Object.



Component	Description
D1-FieldActivityTypeAdd	Used to create a Field Activity Type record.  This component invokes the ATD1FieldActivityType Inbound Web Service using D1-FieldActivityType Business Object.
D1-FieldActivityTypeDelete	Used to delete an existing Field Activity Type record.  This component invokes the ATD1FieldActivityType Inbound Web Service using D1-FieldActivityType Business Object.
D1-FieldActivityTypeRead	Used to query an existing Field Activity Type record.  This component invokes the ATD1FieldActivityType Inbound Web Service using D1-FieldActivityType Business Object.
D1-FieldActivityTypeUpdate	Used to update an existing Field Activity Type record.  This component invokes the ATD1FieldActivityType Inbound Web Service using D1-FieldActivityType Business Object.
C1-PremiseTypeAdd	Used to create a Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO business object.
C1-PremiseTypeDelete	Used to delete an existing Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO business object.
C1-PremiseTypeRead	Used to query an existing Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO business object.
C1-PremiseTypeUpdate	Used to update an existing Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO business object.
W1-AssetLocationTypeAdd	Used to create an Asset Location Type record.  This component invokes the ATW1AssetLocationType Inbound Web Service using the W1-AssetLocationType business object.

Component	Description
W1-AssetLocationTypeDelete	<p>Used to delete an existing Asset Location Type record.</p> <p>This component invokes the ATW1AssetLocationType Inbound Web Service using the W1-AssetLocationType business object.</p>
W1-AssetLocationTypeRead	<p>Used to query an existing Asset Location Type record.</p> <p>This component invokes the ATW1AssetLocationType Inbound Web Service using the W1-AssetLocationType business object.</p>
W1-AssetLocationTypeUpdate	<p>Used to update an existing Asset Location Type record.</p> <p>This component invokes the ATW1AssetLocationType Inbound Web Service using W1-AssetLocationType business object.</p>
W1-AssetTypeAdd	<p>Used to create an Asset Type record.</p> <p>This component invokes the ATW1AssetType Inbound Web Service using the W1-AssetType business object.</p>
W1-AssetTypeDelete	<p>Used to delete an existing Asset Type record.</p> <p>This component invokes the ATW1AssetType Inbound Web Service using the W1-AssetType business object.</p>
W1-AssetTypeRead	<p>Used to query an existing Asset Type record.</p> <p>This component invokes the ATW1AssetType Inbound Web Service using the W1-AssetType business object.</p>
W1-AssetTypeUpdate	<p>Used to update an existing Asset Type record.</p> <p>This component invokes the ATW1AssetType Inbound Web Service using W1-AssetType business object.</p>
W1-ContactTypeRead	<p>Used to query an existing Contact Type record.</p> <p>This component invokes the ATW1ContactType Inbound Web Service using the W1-ContactType business object.</p>
W1-ComponentTypeAdd	<p>Used to create an Operational Device Component Type record.</p> <p>This component invokes the ATW1ComponentType Inbound Web Service using the W1-ComponentType business object.</p>

Component	Description
W1-ComponentTypeDelete	<p>Used to delete an existing Operational Device Component Type record.</p> <p>This component invokes the ATW1ComponentType Inbound Web Service using the W1-ComponentType business object.</p>
W1-ComponentTypeRead	<p>Used to query an existing Operational Device Component Type record.</p> <p>This component invokes the ATW1ComponentType Inbound Web Service using the W1-ComponentType business object.</p>
W1-ComponentTypeUpdate	<p>Used to update an existing Operational Device Component Type record.</p> <p>This component invokes the ATW1ComponentType Inbound Web Service using W1-ComponentType business object.</p>
W1-OrganizationAdd	<p>Used to create an Organization record.</p> <p>This component invokes the ATW1Organization Inbound Web Service using the W1-Organization business object.</p>
W1-OrganizationDelete	<p>Used to delete an existing Organization record.</p> <p>This component invokes the ATW1Organization Inbound Web Service using the W1-Organization business object.</p>
W1-OrganizationRead	<p>Used to query an existing Organization record.</p> <p>This component invokes the ATW1Organization Inbound Web Service using the W1-Organization business object.</p>
W1-OrganizationUpdate	<p>Used to update an existing Organization record.</p> <p>This component invokes the ATW1Organization Inbound Web Service using W1-Organization business object.</p>
W1-OrganizationTypeAdd	<p>Used to create an Organization Type record.</p> <p>This component invokes the ATW1OrganizationType Inbound Web Service using the W1-OrganizationType business object.</p>
W1-OrganizationTypeDelete	<p>Used to delete an existing Organization Type record.</p> <p>This component invokes the ATW1OrganizationType Inbound Web Service using the W1-OrganizationType business object.</p>

Component	Description
W1-OrganizationTypeRead	Used to query an existing Organization Type record.  This component invokes the ATW1OrganizationType Inbound Web Service using the W1-OrganizationType business object.
W1-OrganizationTypeUpdate	Used to update an existing Organization Type record.  This component invokes the ATW1OrganizationType Inbound Web Service using W1-OrganizationType business object.
W1-ServiceHistoryAdd	Used to create an Operational Device Service History record.  This component invokes the ATW1ServiceHistory Inbound Web Service using the W1-ServiceHistory business object.
W1-ServiceHistoryDelete	Used to delete an existing Operational Device Service History record.  This component invokes the ATW1ServiceHistory Inbound Web Service using the W1-ServiceHistory business object.
W1-ServiceHistoryRead	Used to query an existing Operational Device Service History record.  This component invokes the ATW1ServiceHistory Inbound Web Service using the W1-ServiceHistory business object.
W1-ServiceHistoryUpdate	Used to update an existing Operational Device Service History record.  This component invokes the ATW1ServiceHistory Inbound Web Service using W1-ServiceHistory business object.
W1-StorageLocationAdd	Used to create an Out of Service Location record.  This component invokes the ATW1StorageLocation Inbound Web Service using the W1-StorageLocation business object.
W1-StorageLocationDelete	Used to delete an existing Out of Service Location record.  This component invokes the ATW1StorageLocation Inbound Web Service using the W1-StorageLocation business object.

Component	Description
W1-StorageLocationRead	<p>Used to query an existing Out of Service Location record.</p> <p>This component invokes the ATW1StorageLocation Inbound Web Service using the W1-StorageLocation business object.</p>
W1-StorageLocationUpdate	<p>Used to update an existing Out of Service Location record.</p> <p>This component invokes the ATW1StorageLocation Inbound Web Service using W1-StorageLocation business object.</p>
W1-StorageLocationTypeAdd	<p>Used to create an Out of Service Location Type record.</p> <p>This component invokes the ATW1StorageLocationType Inbound Web Service using the W1-StorageLocationType business object.</p>
W1-StorageLocationTypeDelete	<p>Used to delete an existing Out of Service Location Type record.</p> <p>This component invokes the ATW1StorageLocationType Inbound Web Service using the W1-StorageLocationType business object.</p>
W1-StorageLocationTypeRead	<p>Used to query an existing Out of Service Location Type record.</p> <p>This component invokes the ATW1StorageLocationType Inbound Web Service using the W1-StorageLocationType business object.</p>
W1-StorageLocationTypeUpdate	<p>Used to update an existing Out of Service Location Type record.</p> <p>This component invokes the ATW1StorageLocationType Inbound Web Service using W1-StorageLocationType business object.</p>
W2-ServicePointRead	<p>Used to query an existing Service Point record.</p> <p>This component invokes the ATW2ServicePoint Inbound Web Service using the W2-ServicePoint business object.</p>
W2-VehicleAdd	<p>Used to create a Vehicle record.</p> <p>This component invokes the ATW2Vehicle Inbound Web Service using the W2-Vehicle business object.</p>
W1-VehicleDelete	<p>Used to delete an existing Vehicle record.</p> <p>This component invokes the ATW2Vehicle Inbound Web Service using the W2-Vehicle business object.</p>

Component	Description
W1-VehicleRead	Used to query an existing Vehicle record.  This component invokes the ATW2Vehicle Inbound Web Service using the W2-Vehicle business object.
W1-VehicleUpdate	Used to update an existing Vehicle record.  This component invokes the ATW2Vehicle Inbound Web Service using W2-Vehicle business object.
X1-AssetLocationTypeAdd	Used to create a Service Point Type - ODM record.  This component invokes the ATX1AssetLocationType Inbound Web Service using the X1-AssetLocationType business object.
X1-AssetLocationTypeDelete	Used to delete an existing Service Point Type - ODM record.  This component invokes the ATX1AssetLocationType Inbound Web Service using the X1-AssetLocationType business object.
X1-AssetLocationTypeRead	Used to query an existing Service Point Type - ODM record.  This component invokes the ATX1AssetLocationType Inbound Web Service using the X1-AssetLocationType business object.
X1-AssetLocationTypeUpdate	Used to update an existing Service Point Type - ODM record.  This component invokes the ATX1AssetLocationType Inbound Web Service using X1-AssetLocationType business object.
X1-ServicePointTypeAdd	Used to create a Service Point Type - CCB record.  This component invokes the ATX1ServicePointType Inbound Web Service using X1-ServicePointType Business Object.
X1-ServicePointTypeDelete	Used to delete an existing Service Point Type - CCB record.  This component invokes the ATX1ServicePointType Inbound Web Service using X1-ServicePointType BO.
X1-ServicePointTypeRead	Used to query an existing Service Point Type - CCB record.  This component invokes the ATX1ServicePointType Inbound Web Service using X1-ServicePointType BO.

Component	Description
X1-ServicePointTypeUpdate	<p>Used to update an existing Service Point Type - CCB record.</p> <p>This component invokes the ATX1ServicePointType Inbound Web Service using X1-ServicePointType BO.</p>
X1-ServiceTypeAdd	<p>Used to create a Service Type - CCB record.</p> <p>This component invokes the ATX1ServiceType Inbound Web Service using X1-ServiceType BO.</p>
X1-ServiceTypeDelete	<p>Used to delete an existing Service Type - CCB record.</p> <p>This component invokes the ATX1ServiceType Inbound Web Service using X1-ServiceType BO.</p>
X1-ServiceTypeRead	<p>Used to query an existing Service Type - CCB record.</p> <p>This component invokes the ATX1ServiceType Inbound Web Service using X1-ServiceType BO.</p>
X1-ServiceTypeUpdate	<p>Used to update an existing Service Type - CCB record.</p> <p>This component invokes the ATX1ServiceType Inbound Web Service using X1-ServiceType BO.</p>
X1D-ServicePointTypeAdd	<p>Used to create a Service Point Type - MDM record.</p> <p>This component invokes the ATXD1ServicePointType Inbound Web Service using X1D-ServicePointType BO.</p>
X1D-ServicePointTypeDelete	<p>Used to delete an existing Service Point Type - MDM record.</p> <p>This component invokes the ATXD1ServicePointType Inbound Web Service using X1D-ServicePointType BO.</p>
X1D-ServicePointTypeRead	<p>Used to query an existing Service Point Type - MDM record.</p> <p>This component invokes the ATXD1ServicePointType Inbound Web Service using X1D-ServicePointType BO.</p>
X1D-ServicePointTypeUpdate	<p>Used to update an existing Service Point Type - MDM record.</p> <p>This component invokes the ATXD1ServicePointType Inbound Web Service using X1D-ServicePointType BO.</p>

Component	Description
D1-DeviceEventComRespTypeAdd	<p>Used to create a Device Event Communication Response Type record.</p> <p>This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.</p>
D1-DeviceEventComRespTypeDel	<p>Used to delete an existing Device Event Communication Response Type record.</p> <p>This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.</p>
D1-DeviceEventComRespTypeRead	<p>Used to query an existing Device Event Communication Response Type record.</p> <p>This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.</p>
D1-DeviceEventComRespTypeUpd	<p>Used to update an existing Device Event Communication Response Type record.</p> <p>This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.</p>
D1-DeviceEventComRespTypeUpd	<p>Used to update an existing Device Event Communication Response Type record.</p> <p>This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.</p>
W1-AssetCompCfgRptAdd	<p>Used to create a Component Config Report record.</p> <p>This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Service of ATW1AssetCompCfgRpt.</p>
W1-AssetCompCfgRptDelete	<p>Used to delete an existing Component Config Report record.</p> <p>This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Service of ATW1AssetCompCfgRpt.</p>
W1-AssetCompCfgRptRead	<p>Used to query an existing Component Config Report record.</p> <p>This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Service of ATW1AssetCompCfgRpt.</p>



Component	Description
W1-AssetCompCfgRptUpdate	<p>Used to update an existing Component Config Report record.</p> <p>This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Service of ATW1AssetCompCfgRpt.</p>
W1-AssetCompConfigAdd	<p>Used to create an Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetCompConfig Inbound Web Service using W1-AssetCompConfig BO.</p>
W1-AssetCompConfigDelete	<p>Used to delete an Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetCompConfig Inbound Web Service using W1-AssetCompConfig BO.</p>
W1-AssetCompConfigRead	<p>Used to query an Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetCompConfig Inbound Web Service using W1-AssetCompConfig BO.</p>
W1-AssetCompConfigUpdate	<p>Used to query an Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetCompConfig Inbound Web Service using W1-AssetCompConfig BO.</p>
W1-AssetCompToAssetCompCfgRptAdd	<p>Used to create an Asset Component to Asset Component Config Report record.</p> <p>This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt Inbound Web Service using W1-AssetCompToAssetCompCfgRpt BO.</p>
W1-AssetCompToAssetCompCfgRpt Delete	<p>Used to update an existing Asset Component to Asset Component Config Report record.</p> <p>This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt Inbound Web Service using W1-AssetCompToAssetCompCfgRpt BO.</p>

Component	Description
W1-AssetCompToAssetCompCfgRptRead	<p>Used to update an query Asset Component to Asset Component Config Report record.</p> <p>This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt Inbound Web Service using W1-AssetCompToAssetCompCfgRpt BO.</p>
W1-AssetCompToAssetCompCfgRpt Update	<p>Used to delete an query Asset Component to Asset Component Config Report record</p> <p>This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt Inbound Web Service using W1-AssetCompToAssetCompCfgRpt BO.</p>
W1-AssetCompToAssetConfigAdd	<p>Used to create an Asset Component to Asset Config record.</p> <p>This component invokes the ATW1AssetCompToAssetConfig Inbound Web Service using W1-AssetCompToAssetConfig BO.</p>
W1-AssetCompToAssetConfigDelete	<p>Used to delete an existing Asset Component to Asset Config record.</p> <p>This component invokes the ATW1AssetCompToAssetConfig Inbound Web Service using W1-AssetCompToAssetConfig BO.</p>
W1-AssetCompToAssetConfigRead	<p>Used to update an existing Asset Component to Asset Config record.</p> <p>This component invokes the ATW1AssetCompToAssetConfig Inbound Web Service using W1-AssetCompToAssetConfig BO.</p>
W1-AssetCompToAssetConfigUpdate	<p>Used to update an existing Asset Component to Asset Component Config record.</p> <p>This component invokes the ATW1AssetCompToAssetConfig Inbound Web Service using W1-AssetCompToAssetConfig BO.</p>
W1-AssetToAssetCompCfgRptAdd	<p>Used to create an Asset to Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetToAssetCompCfgRpt Inbound Web Service using W1-AssetToAssetCompCfgRpt BO.</p>

Component	Description
W1-AssetToAssetCompCfgRptDelete	<p>Used to delete an existing Asset to Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetToAssetCompCfgRpt Inbound Web Service using W1-AssetToAssetCompCfgRpt BO.</p>
W1-AssetToAssetCompCfgRptRead	<p>Used to query an existing Asset to Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetToAssetCompCfgRpt Inbound Web Service using W1-AssetToAssetCompCfgRpt BO.</p>
W1-AssetToAssetCompCfgRptUpdate	<p>Used to update an existing Asset to Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetToAssetCompCfgRpt Inbound Web Service using W1-AssetToAssetCompCfgRpt BO.</p>
W1-AssetToAssetConfigAdd	<p>Used to create an Asset to Asset record.</p> <p>This component invokes the ATD8StatusChangedType Inbound Web Service using D8-ReadOnDemandReadResultType BO.</p>
W1-AssetToAssetConfigDelete	<p>Used to delete an existing Asset to Asset record.</p> <p>This component invokes the ATD8ReadOnDemandReadResultType Inbound Web Service using D8-StatusChangedType BO.</p>
W1-AssetToAssetConfigRead	<p>Used to query an existing Asset to Asset record.</p> <p>This component invokes the ATD8StatusChangedType Inbound Web Service using D8-StatusChangedType BO.</p>
W1-AssetToAssetConfigUpdate	<p>Used to update an existing Asset to Asset record.</p> <p>This component invokes the ATD8StatusChangedType Inbound Web Service using D8-StatusChangedType BO.</p>
W1-ConfigTypeAdd	<p>Used to create a Config Type record.</p> <p>This component invokes the ATW1ConfigType Inbound Web Service using W1-ConfigType BO.</p>
W1-ConfigTypeDelete	<p>Used to delete an existing Config Type record.</p> <p>This component invokes the ATW1ConfigType Inbound Web Service using W1-ConfigType BO.</p>

Component	Description
W1-ConfigTypeRead	Used to query an existing Config Type record.  This component invokes the ATW1ConfigType Inbound Web Service using W1-ConfigType BO.
W1-ConfigTypeUpdate	Used to update an existing Config Type record.  This component invokes the ATW1ConfigType Inbound Web Service using W1-ConfigType BO.
W1-SingleAssetCfgRptAdd	Used to create a Single Asset Config Report record.  This component invokes the ATW1SingleAssetCfgRp Inbound Web Service using W1-SingleAssetCfgRp BO.
W1-SingleAssetCfgRptDelete	Used to delete an existing Single Asset Config Report record.  This component invokes the ATW1SingleAssetCfgRp Inbound Web Service using W1-SingleAssetCfgRp BO.
W1-SingleAssetCfgRptRead	Used to query an existing Single Asset Config Report record  This component invokes the ATW1SingleAssetCfgRp Inbound Web Service using W1-SingleAssetCfgRp BO.
W1-SingleAssetCfgRptUdpate	Used to update an existing Single Asset Config Report record.  This component invokes the ATW1SingleAssetCfgRp Inbound Web Service using W1-SingleAssetCfgRp BO.
W1-SingleAssetConfigAdd	Used to create a Single Asset Config record.  This component invokes the ATW1SingleAssetConfig Inbound Web Service using W1-SingleAssetConfig BO.
W1-SingleAssetConfigDelete	Used to delete an existing Single Asset Config record.  This component invokes the ATW1SingleAssetConfig Inbound Web Service using W1-SingleAssetConfig BO.
W1-ActivityCompletionEventTypeAdd	Used to create an Activity Completion Event Type record.  This component invokes the ATW1ActivityCompletionEventType Inbound Web Service using W1-ActivityCompletionEventType Business Object.

Component	Description
W1-ActivityCompletionEventTypeDelete	<p>Used to delete an existing Activity Completion Event Type record.</p> <p>This component invokes the ATW1ActivityCompletionEventType Inbound Web Service using W1-ActivityCompletionEventType Business Object.</p>
W1-ActivityCompletionEventTypeRead	<p>Used to query an existing Activity Completion Event Type record.</p> <p>This component invokes the ATW1ActivityCompletionEventType Inbound Web Service using W1-ActivityCompletionEventType Business Object.</p>
W1-ActivityCompletionEventTypeUpdate	<p>Used to update an existing Activity Completion Event Type record.</p> <p>This component invokes the ATW1ActivityCompletionEventType Inbound Web Service using W1-ActivityCompletionEventType Business Object.</p>
W1-AssetDposCmpEvtTypeAdd	<p>Used to create an Asset Disposition Completion Event Type record</p> <p>This component invokes the ATW1AssetDposCmpEvtType Inbound Web Service using W1-AssetDposCmpEvtType Business Object.</p>
W1-AssetDposCmpEvtTypeDelete	<p>Used to delete an existing Asset Disposition Completion Event Type record.</p> <p>This component invokes the ATW1AssetDposCmpEvtType Inbound Web Service using W1-AssetDposCmpEvtType Business Object.</p>
W1-AssetDposCmpEvtTypeRead	<p>Used to query an existing Asset Disposition Completion Event Type record.</p> <p>This component invokes the ATW1AssetDposCmpEvtType Inbound Web Service using W1-AssetDposCmpEvtType Business Object.</p>
W1-AssetDposCmpEvtTypeUpdate	<p>Used to update an existing Asset Disposition Completion Event Type record</p> <p>This component invokes the ATW1AssetDposCmpEvtType Inbound Web Service using W1-AssetDposCmpEvtType Business Object.</p>

Component	Description
W1-BasicActivityTypeAdd	Used to create a Basic Activity Type record.  This component invokes the ATW1BasicActivityType Inbound Web Service using W1-BasicActivityType Business Object.
W1-BasicActivityTypeDel	Used to delete an existing Basic Activity Type record.  This component invokes the ATW1BasicActivityTypeInbound Web Service using W1-BasicActivityType Business Object.
W1-BasicActivityTypeRead	Used to query an existing Basic Activity Type record.  This component invokes the ATW1BasicActivityType Inbound Web Service using W1-BasicActivityType Business Object.
W1-BasicActivityTypeUpdate	Used to update an existing Basic Activity Type record.  This component invokes the ATW1BasicActivityType Inbound Web Service using W1-BasicActivityType Business Object.
W1-DataAreaCmpEvtTypeAdd	Used to create Data Area Completion Event Type record.  This component invokes the ATW1DataAreaCmpEvtType Inbound Web Service using W1-DataAreaCmpEvtType Business Object.
W1-DataAreaCmpEvtTypeDelete	Used to delete an existing Data Area Completion Event Type record.  This component invokes the ATW1DataAreaCmpEvtType Inbound Web Service using W1-DataAreaCmpEvtType Business Object.
W1-DataAreaCmpEvtTypeRead	Used to query an existing Data Area Completion Event Type record  This component invokes the ATW1DataAreaCmpEvtType Inbound Web Service using W1-DataAreaCmpEvtType Business Object.
W1-DataAreaCmpEvtTypeUpdate	Used to update an existing Data Area Completion Event Type record  This component invokes the ATW1DataAreaCmpEvtType Inbound Web Service using W1-DataAreaCmpEvtType Business Object.

Component	Description
W1-GeneralCommunicationAdd	<p>Used to create a General Inbound Communication Type record.</p> <p>This component invokes the ATW1GeneralCommunicationType Inbound Web Service using W1-GeneralCommunicationTypeBusiness Object.</p>
W1-GeneralCommunicationDelete	<p>Used to delete an existing General Inbound Communication Type record</p> <p>This component invokes the ATW1GeneralCommunicationType Inbound Web Service using W1-GeneralCommunicationType Business Object.</p>
W1-GeneralCommunicationRead	<p>Used to query an existing General Inbound Communication Type record</p> <p>This component invokes the ATW1GeneralCommunicationType Inbound Web Service using W1-GeneralCommunicationType Business Object.</p>
W1-GeneralCommunicationUpdate	<p>Used to update an existing General Inbound Communication Type record.</p> <p>This component invokes the ATW1GeneralCommunicationType Inbound Web Service using W1-GeneralCommunicationType Business Object.</p>
W1-GeneralCompletionEventTypeAdd	<p>Used to create General Completion Event Type record.</p> <p>This component invokes the ATW1GeneralCompletionEventType Inbound Web Service using W1-GeneralCompletionEventType Business Object.</p>
W1-GeneralCompletionEventTypeDelete	<p>Used to delete an existing General Completion Event Type record.</p> <p>This component invokes the ATW1GeneralCompletionEventType Inbound Web Service using W1-GeneralCompletionEventType Business Object.</p>
W1-GeneralCompletionEventTypeRead	<p>Used to query an existing General Completion Event Type record</p> <p>This component invokes the ATW1GeneralCompletionEventType Inbound Web Service using W1-GeneralCompletionEventType Business Object.</p>

Component	Description
W1- GeneralCompletionEventTypeUpdate	Used to update an existing General Completion Event Type record  This component invokes the ATW1GeneralCompletionEventType Inbound Web Service using W1-GeneralCompletionEventType Business Object.
W1-ManufacturerAdd	Used to create a Manufacturer record.  This component invokes the ATW1Manufacturer Inbound Web Service using W1-Manufacturer Business Object.
W1-ManufacturerDelete	Used to delete an existing Manufacturer record.  This component invokes the ATW1Manufacturer Inbound Web Service using W1-Manufacturer Business Object.
W1-ManufacturerRead	Used to query an existing Manufacturer record.  This component invokes the ATW1Manufacturer Inbound Web Service using W1-Manufacturer Business Object.
W1-ManufacturerUpdate	Used to update an existing Manufacturer record.  This component invokes the ATW1Manufacturer Inbound Web Service using W1-Manufacturer Business Object.
W1-OutboundActivityTypeAdd	Used to create an Outbound Activity Type record.  This component invokes the ATW1OutboundActivityType Inbound Web Service using W1-OutboundActivityType Business Object.
W1-OutboundActivityTypeDelete	Used to delete an existing Outbound Activity Type record.  This component invokes the ATW1OutboundActivityType Inbound Web Service using W1-OutboundActivityType Business Object.
W1-OutboundActivityTypeRead	Used to query an existing Outbound Activity Type record.  This component invokes the ATW1OutboundActivityType Inbound Web Service using W1-OutboundActivityType Business Object.



Component	Description
W1-OutboundActivityTypeUpdate	<p>Used to update an existing Outbound Activity Type record.</p> <p>This component invokes the ATW1OutboundActivityType Inbound Web Service using W1-OutboundActivityType Business Object.</p>
W1-ReplicationComplEventTypeAdd	<p>Used to create a Replication Completion Event Type record.</p> <p>This component invokes the ATW1ReplicationComplEventType Inbound Web Service using W1-ReplicationComplEventType Business Object.</p>
W1-ReplicationComplEventTypeDelete	<p>Used to delete an existing Replication Completion Event Type record</p> <p>This component invokes the ATW1ReplicationComplEventType Inbound Web Service using W1-ReplicationComplEventType Business Object.</p>
W1-ReplicationComplEventTypeRead	<p>Used to query an existing Replication Completion Event Type record</p> <p>This component invokes the ATW1ReplicationComplEventType Inbound Web Service using W1-ReplicationComplEventType Business Object.</p>
W1-ReplicationComplEventTypeUpdate	<p>Used to update an existing Replication Completion Event Type record.</p> <p>This component invokes the ATW1ReplicationComplEventType Inbound Web Service using W1-ReplicationComplEventType Business Object.</p>
W1-ScheduledActivityTypeAdd	<p>Used to create a Scheduled Activity Type record.</p> <p>This component invokes the ATW1ScheduledActivityType Inbound Web Service using W1-ScheduledActivityType Business Object.</p>
W1-ScheduledActivityTypeDelete	<p>Used to delete an existing Scheduled Activity Type record.</p> <p>This component invokes the ATW1ScheduledActivityType Inbound Web Service using W1-ScheduledActivityType Business Object.</p>

Component	Description
W1-ScheduledActivityTypeRead	<p>Used to query an existing Scheduled Activity Type record.</p> <p>This component invokes the ATW1ScheduledActivityType Inbound Web Service W1-ScheduledActivityType Business Object.</p>
W1-ScheduledActivityTypeUpdate	<p>Used to update an existing Scheduled Activity Type record.</p> <p>This component invokes the ATW1ScheduledActivityType Inbound Web Service using W1-ScheduledActivityType Business Object.</p>
W1-ServiceHistTypeCmpEvtTypeAdd	<p>Used to create a Service History Completion Event Type record.</p> <p>This component invokes the ATW1ServiceHistTypeCmpEvtTypeInbound Web Service using W1-ServiceHistTypeCmpEvtType Business Object.</p>
W1-ServiceHistTypeCmpEvtTypeDelete	<p>Used to delete an existing Service History Completion Event Type record.</p> <p>This component invokes the ATW1ServiceHistTypeCmpEvtTypeInbound Web Service W1-ServiceHistTypeCmpEvtType Business Object.</p>
W1-ServiceHistTypeCmpEvtTypeRead	<p>Used to query an existing Service History Completion Event Type record.</p> <p>This component invokes the ATW1ServiceHistTypeCmpEvtTypeInbound Web Service W1-ServiceHistTypeCmpEvtType Business Object.</p>
W1-ServiceHistTypeCmpEvtTypeUpdate	<p>Used to update an existing Service History Completion Event Type record.</p> <p>This component invokes the ATW1ServiceHistTypeCmpEvtType Inbound Web Service using W1-ServiceHistTypeCmpEvtType Business Object.</p>
W1-SvcHistFromActvCmplEvtTypeAdd	<p>Used to create a Service History From Activity Completion Event Type record.</p> <p>This component invokes the ATW1SvcHistFromActvCmplEvtType Inbound Web Service W1-SvcHistFromActvCmplEvtType Business Object.</p>

Component	Description
W1-SvcHistFromActvCmplEvtTypeDelete	<p>Used to delete an existing Service History From Activity Completion Event Type record.</p> <p>This component invokes the ATW1SvcHistFromActvCmplEvtType Inbound Web Service W1-SvcHistFromActvCmplEvtType Business Object.</p>
W1-SvcHistFromActvCmplEvtTypeRead	<p>Used to query an existing Service History From Activity Completion Event Type record.</p> <p>This component invokes the ATW1SvcHistFromActvCmplEvtType Inbound Web Service W1-SvcHistFromActvCmplEvtType Business Object.</p>
W1-SvcHistFromActvCmplEvtTypeUpdate	<p>Used to update an existing Service History From Activity Completion Event Type record.</p> <p>This component invokes the ATW1SvcHistFromActvCmplEvtType Inbound Web Service W1-SvcHistFromActvCmplEvtType Business Object.</p>
W1-SOMActivityTypeRead	<p>Used to query a SOM Activity Type record.</p> <p>This component invokes the ATW1SOMActivityType Inbound Web Service using W1-SOMActivityType Business Object.</p>
D2-SubIntAdjustmentVEE	<p>Performs adjustments to consumption; the changes to consumption will be validated against the readings contained prior to and subsequent to the change made.</p> <p>This component invokes the D2-SubIntAdjustmentVEE Business Object using the ATD2SubIntAdjustmentVEE Inbound Web Service.</p>
D2-GetSubtractiveInterval	<p>Allows the configuration of subtractive interval data retrieval during usage transaction processing. The rule records service quantities per service point and measuring component - which means that subtractive interval curves for different measuring components.</p> <p>This component invokes the D2-GetSubtractiveInterval Business Object using the ATD2GetSubtractiveInterval Inbound Web Service.</p>

Component	Description
D1-MeterReadDownloadActType	<p>Used to create a MeterReadDownloadActType Activity Type.</p> <p>This component invokes the D1-MeterReadDownloadActType Business Object using the ATD1MeterReadDownloadActType Inbound Web Service.</p>
D1-PairedEventLastDvcEvtType	<p>Used to create a PairedEventLastDvcEvtType Device Event Type.</p> <p>This component invokes the D1-PairedEventLastDvcEvtType Business Object using the ATD1PairedEventLastDvcEvtType Inbound Web Service.</p>
D1-StandardDeviceEventType	<p>Used to create a StandardDeviceEventType Device Event Type.</p> <p>This component invokes the D1-StandardDeviceEventType Business Object using the ATD1StandardDeviceEventType Inbound Web Service.</p>
D1-UTCorrectnPrcessrActvtyType	<p>Defines the activity BO to use in the creation of a Usage Transaction Correction Processor. This component also defines the general category of these activities as a Correction Processor.</p> <p>The component invokes the D1-UTCorrectnPrcessrActvtyType Business Object using the ATD1UTCorrectnPrcessrActvtyType Inbound Web Service.</p>
D1-RemoteConnectType	<p>Describes configuration parameters required for the Remote Connect command activity, including automated retry and command time-out options. This component allows the definition of a Service Issue Monitor Type resulting in the creation of a Service Issue Monitor of the configured type if a Remote Connect command activity has failed.</p> <p>The component invokes the D1-RemoteConnectType Business Object using the ATD1RemoteConnectType Inbound Web Service.</p>
D1-PairedEventFirstDvcEvtType	<p>Describes the Device Event Type - Paired Event (First).</p> <p>This component invokes the D1-PairedEventFirstDvcEvtType Business Object using the ATD1PairedEventFirstDvcEvtType Inbound Web Service.</p>

Component	Description
D1-DeviceWithDurationActType	<p>Describes the Device Activity with Duration Type.</p> <p>This component invokes the D1-DeviceWithDurationActType Business Object using the ATD1DeviceWithDurationActType Inbound Web Service.</p>
D2-SubMeasurementAggType	<p>Describes the Sub Measurement Aggregator Type.</p> <p>This component invokes the D2-SubMeasurementAggType Business Object using the ATD2SubMeasurementAggType Inbound Web Service.</p>
D2-MasterMsrmAggregatorType	<p>Describes the Master Measurement Aggregator Type.</p> <p>This component invokes the D2-MasterMsrmAggregatorType Business Object using the ATD2MasterMsrmAggregatorType Inbound Web Service.</p>
D2-ActivityTypeAggDimScanner	<p>Describes the Aggregator Dimension Scanner Activity Type.</p> <p>This component invokes the D2-ActivityTypeAggDimScanner Business Object using the ATD2ActivityTypeAggDimScanner Inbound Web Service.</p>
D2-AggregatorType	<p>Used to create an AggregatorType Measuring Component Type.</p> <p>This component invokes the D2-AggregatorType Business Object using the ATD2AggregatorType Inbound Web Service.</p>
D1-IntervalChannelTypePhysical	<p>Used to create a IntervalChannelTypePhysical.</p> <p>This component invokes the D1-IntervalChannelTypePhysical Business Object using the ATD1IntervalChannelTypePhysical Inbound Web Service.</p>
D1-MeasurementCycleSchedule	<p>Used to create a MeasurementCycleSchedule.</p> <p>This component invokes the D1-MeasurementCycleSchedule Business Object using the ATD1MeasurementCycleSchedule Inbound Web Service.</p>
D1-ReaderRemarkType	<p>Used to create a ReaderRemarkType.</p> <p>This component invokes the D1-ReaderRemarkType Business Object using the ATD1ReaderRemarkType Inbound Web Service.</p>

Component	Description
D1-ServiceIssueMonitorType	Used to create a ServiceIssueMonitorType.  This component invokes the D1-ServiceIssueMonitorType Business Object using the ATD1ServiceIssueMonitorType Inbound Web Service.
D2-MsrmtQuantityAggScannerType	Used to create a MsrmtQuantityAggScannerType.  This component invokes the D2-MsrmtQuantityAggScannerType Business Object using the ATD2MsrmtQuantityAggScannerType Inbound Web Service.
D2-TOUGroup	Used to create a TOUGroup.  This component invokes the D2-TOUGroup Business Object using the ATD2TOUGroup Inbound Web Service.
D2-VEERuleHighLowCheck	Used to create a VEERuleHighLowCheck.  This component invokes the D2-VEERuleHighLowCheck Business Object using the ATD2VEERuleHighLowCheck Inbound Web Service.
D1-HowToCreateMCInformation	Used to create a HowToCreateMCInformation.  This component invokes the D1-HowToCreateMCInformation Business Object using the ATD1HowToCreateMCInformation Inbound Web Service.
D1-HowToSendActivityResponse	Used to create a HowToSendActivityResponse.  This component invokes the D1-HowToSendActivityResponse Business Object using the ATD1HowToSendActivityResponse Inbound Web Service.
D1-AvgDailyEstItemConsumption	Used to create a AvgDailyEstItemConsumption.  This component invokes the D1-AvgDailyEstItemConsumption Business Object using the ATD1AvgDailyEstItemConsumption Inbound Web Service.
D1-VEEEligibilityCriteria	Used to create a VEEEligibilityCriteria.  This component invokes the D1-VEEEligibilityCriteria Business Object using the ATD1VEEEligibilityCriteria Inbound Web Service.

Component	Description
D2-VerifyUomTouSqimCEexistForUs	Used to create a VerifyUomTouSqimCEexistForUs.  This component invokes the D2-VerifyUomTouSqimCEexistForUs Business Object using the ATD2VerifyUomTouSqimCEexistForUs Inbound Web Service.
D1-DeviceEventSeeder	Used to create a DeviceEventSeeder.  This component invokes the D1-DeviceEventSeeder Business Object using the ATD1DeviceEventSeeder Inbound Web Service.
D1-FieldActivity	Used to create a FieldActivity.  This component invokes the D1-FieldActivity Business Object using the ATD1FieldActivity Inbound Web Service.
D1-ReaderRemark	Used to create a ReaderRemark.  This component invokes the D1-ReaderRemark Business Object using the ATD1ReaderRemark Inbound Web Service.
D1-TimeZoneTranslationLookup	Used to create a TimeZoneTranslationLookup.  This component invokes the D1-ATD1TimeZoneTranslationLookup Business Object using the ATD1ReaderRemark Inbound Web Service.
D2-UsageCalculationGroupLookup	Used to create a UsageCalculationGroupLookup.  This component invokes the D2-UsageCalculationGroupLookup Business Object using the ATD2UsageCalculationGroupLookup Inbound Web Service.
D2-MDMMasterConfig	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig.  This component invokes the D2-MDMMasterConfig Business Object using the ATD2MDMMasterConfig Inbound Web Service.
D2-MDMMasterConfig	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig.  This component invokes the D2-MDMMasterConfig Business Object using the ATD2MDMMasterConfig Inbound Web Service.

Component	Description
D2-MtrCommTrckngAggregatorType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a MtrCommTrckngAggregatorType.</p> <p>This component invokes the D2-MtrCommTrckngAggregatorType Business Object using the ATD2MtrCommTrckngAggregatorType Inbound Web Service.</p>
D1-EstimationSuppressionType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a EstimationSuppressionType.</p> <p>This component invokes the D1-EstimationSuppressionType Business Object using the ATD1EstimationSuppressionType Inbound Web Service.</p>
D2-InactiveMeasurementCheck	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a InactiveMeasurementCheck VEE Rule.</p> <p>This component invokes the D1-InactiveMeasurementCheck Business Object using the ATD2InactiveMeasurementCheck Inbound Web Service.</p>
D1-ChannelStatisticsType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatisticsType.</p> <p>This component invokes the D1-ChannelStatisticsType Business Object using the ATD1ChannelStatisticsType Inbound Web Service.</p>
D1-ChannelStatistics	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatistics.</p> <p>This component invokes the D1- ChannelStatistics Business Object using the ATD1ChannelStatistics Inbound Web Service.</p>
D1-FacilityLite	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a FacilityLite.</p> <p>This component invokes the D1- FacilityLite Business Object using the ATD1FacilityLite Inbound Web Service.</p>
D1-SpecificationLookup	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a SpecificationLookup.</p> <p>This component invokes the D1-SpecificationLookup Business Object using the ATD1SpecificationLookup Inbound Web Service.</p>



Component	Description
D1-MeasuringCompTypLite	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MeasuringCompTypLite.  This component invokes the D1-MeasuringCompTypLite Business Object using the ATD1MeasuringCompTypLite Inbound Web Service.
D1-GetDvcFrmIdenTypFlag	Used to retrieve Device ID By Identifier and Type Flag using the ATD1 GetDvcFrmIdenTypFlag Inbound Web Service.
D1-GetSimdIdFromImd	Used to retrieve Simd ID By IMD ID using the ATD1GetSimdIdFromImd Inbound Web Service.
D1-GetMCFrmDvcExtId	Used to retrieve Measuring Component ID from Device External ID using the ATD1GetMCFrmDvcExtId Inbound Web Service.
D1-GetProductKeyFromSync	Used to Get Product Key from Sync Request ID using the ATD1 GetProductKeyFromSync Inbound Web Service.
D1-GetUsageFromExtID	Used to retrieve Usage ID from CCB Usage ID using the ATD1 GetUsageFromExtID Inbound Web Service.
D2-GetUSFromExtID	Used to retrieve US ID from External ID using the ATD1 GetUSFromExtID Inbound Web Service.
D1-GetDCFrmDvcExtId	Used to retrieve DC ID from External ID using the ATD1GetDCFrmDvcExtId Inbound Web Service.
D1-GetInstEvtFromDvcExId	Used to retrieve Install Event ID from Device External ID using ATD1GetInstEvtFromDvcExId Inbound Web Service.
D1-GetInstEvtFrmSPExtId	Used to retrieve Install Event ID from Service Point External ID using the ATD1GetInstEvtFrmSPExtId Inbound Web Service.
D1-GetMCFromExtID	Used to retrieve Measuring Component ID from External ID using the ATD1GetMCFromExtID Inbound Web Service.
D1-GetContactFromExtID	Used to retrieve Contact ID from External ID using the ATD1GetContactFromExtID Inbound Web Service.
D1-GetSpFromExtID	Used to retrieve Service Point ID from External ID using the ATD1GetSpFromExtID Inbound Web Service.
D1-GetSyncReqIdFrmExtId	Used to retrieve Sync Request ID from External ID using the ATD1GetSyncReqIdFrmExtId Inbound Web Service.

Component	Description
C1-MktSATypeSARelationshipTypeAdd	Used to add a Market SA Type SA Relationship Type.  This component invokes the ATC1MktSATypeSARelationshipTypeInboundWeb Service the using C1-MktSATypeSARelationshipType Business Object.
C1-MktSATypeSARelationshipTypeDelete	Used to delete a Market SA Type SA Relationship Type.  This component invokes the ATC1MktSATypeSARelationshipTypeInboundWeb Service the using C1-MktSATypeSARelationshipType Business Object.
C1-MktSATypeSARelationshipTypeRead	Used to read a Market SA Type SA Relationship Type.  This component invokes the ATC1MktSATypeSARelationshipTypeInboundWeb Service the using C1-MktSATypeSARelationshipType Business Object.
C1-MktSATypeSARelationshipTypeUpdate	Used to update a Market SA Type SA Relationship Type.  This component invokes the ATC1MktSATypeSARelationshipTypeInboundWeb Service the using C1-MktSATypeSARelationshipType Business Object.
C1-UserMiscRead	Used to Read a User Miscellaneous record.  This component invokes the ATC1UserMisc Inbound Web Service using the C1-UserMisc Business Object.
C1-UserMiscUpdate	Used to Update a User Miscellaneous record.  This component invokes the ATC1UserMisc Inbound Web Service using the C1-UserMisc Business Object.
C1-WorkCalendarAdd	Used for adding a Work Calendar record.  This component invokes the ATC1WorkCalendar Inbound Web Service using the F1-WorkCalendarPhysicalBO Business Object.
C1-WorkCalendarDelete	Used for deleting a Work Calendar record.  This component invokes the ATC1WorkCalendar Inbound Web Service using the F1-WorkCalendarPhysicalBO Business Object.

Component	Description
C1-WorkCalendarRead	<p>Used for reading a Work Calendar record.</p> <p>This component invokes the ATC1WorkCalendar Inbound Web Service using the F1-WorkCalendarPhysicalBO Business Object.</p>
C1-WorkCalendarUpdate	<p>Used for updating a Work Calendar record.</p> <p>This component invokes the ATC1WorkCalendar Inbound Web Service using the F1-WorkCalendarPhysicalBO Business Object.</p>
C1-SATypeSARelationshipTypeAdd	<p>Used to add a SA Type SA Relationship Type record.</p> <p>This component invokes the ATC1SATypeSARelationshipType Inbound Web Service using the C1-SATypeSARelationshipType Business Object.</p>
C1-SATypeSARelationshipTypeRead	<p>Used to read a SA Type Relationship Type Record</p> <p>This component invokes the ATC1SATypeSARelationshipType Inbound Web Service using the C1-SATypeSARelationshipType Business Object.</p>
C1-SATypeSARelationshipTypeUpdate	<p>Used to update a SA Type Relationship Type record.</p> <p>This component invokes the ATC1SATypeSARelationshipType Inbound Web Service using the C1-SATypeSARelationshipType Business Object.</p>
C1-SATypeSARelationshipTypeDelete	<p>Used to Delete a SA Type Relationship Type record.</p> <p>This component invokes the ATC1SATypeSARelationshipType Inbound Web Service using the C1-SATypeSARelationshipType Business Object.</p>

## Asset Management

Component	Description
W1-SingleAssetConfigRead	<p>Used to query an existing Single Asset Config record.</p> <p>This component invokes the ATW1SingleAssetConfig Inbound Web Service using W1-SingleAssetConfig BO.</p>
W1-SingleAssetConfigUpdate	<p>Used to update an existing Single Asset Config record.</p> <p>This component invokes the ATW1SingleAssetConfig Inbound Web Service using W1-SingleAssetConfig BO.</p>
W1-AssetLocationAdd	<p>Used to add an Operational Device Asset Location record.</p> <p>This component invokes the Inbound Web Service ATW1AssetLocation using the W1-AssetLocation Business Object.</p>
W1-AssetLocationDelete	<p>Used to delete an Operational Device Asset Location record.</p> <p>This component invokes the Inbound Web Service ATW1AssetLocation using the W1-AssetLocation Business Object.</p>
W1-AssetLocationRead	<p>Used to read an Operational Device Asset Location record.</p> <p>This component invokes the Inbound Web Service ATW1AssetLocation using the W1-AssetLocation Business Object.</p>
W1-AssetLocationUpdate	<p>Used to update an Operational Device Asset Location record.</p> <p>This component invokes the Inbound Web Service ATW1AssetLocation using the W1-AssetLocation Business Object.</p>
W1-BasicTestAdd	<p>Used to add an Operational Device Basic Test record.</p> <p>This component invokes the Inbound Web Service ATW1BasicTest using the W1-BasicTest business object.</p>
W1-BasicTestDelete	<p>Used to delete an Operational Device Basic Test record.</p> <p>This component invokes the Inbound Web Service ATW1BasicTest using the W1-BasicTest business object.</p>

Component	Description
W1-BasicTestRead	<p>Used to read an Operational Device Basic Test record.</p> <p>This component invokes the Inbound Web Service ATW1BasicTest using the W1-BasicTest business object.</p>
W1-BasicTestUpdate	<p>Used to update an Operational Device Basic Test record.</p> <p>This component invokes the Inbound Web Service ATW1BasicTest using the W1-BasicTest business object.</p>
W1-ServiceHistoryAdd	<p>Used to add a Service History record.</p> <p>This component invokes the Inbound Web Service ATW1ServiceHistory using the W1-ServiceHistory business object.</p>
W1-ServiceHistoryDelete	<p>Used to delete a Service History record.</p> <p>This component invokes the Inbound Web Service ATW1ServiceHistory using the W1-ServiceHistory business object.</p>
W1-ServiceHistoryRead	<p>Used to read a Service History record.</p> <p>This component invokes the Inbound Web Service ATW1ServiceHistory using the W1-ServiceHistory business object.</p>
W1-ServiceHistoryUpdate	<p>Used to update a Service History record.</p> <p>This component invokes the Inbound Web Service ATW1ServiceHistory using the W1-ServiceHistory business object.</p>
W2-CommComponentAdd	<p>Used to add a Communication Component record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationComponent using the W2-CommunicationComponent Business Object.</p>
W2-CommComponentDelete	<p>Used to delete a Communication Component record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationComponent using the W2-CommunicationComponent Business Object.</p>
W2-CommComponentRead	<p>Used to read a Communication Component record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationComponent using the W2-CommunicationComponent Business Object.</p>

Component	Description
W2-CommComponentUpdate	<p>Used to update a Communication Component record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationComponent using the W2-CommunicationComponent Business Object.</p>
W2-CommCompSpecificationAdd	<p>Used to add a Comm Comp Specification record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationComponentSpec using the W2-CommunicationComponentSpec Business Object.</p>
W2-CommCompSpecificationDelete	<p>Used to delete a Comm Comp Specification record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationComponentSpec using the W2-CommunicationComponentSpec Business Object.</p>
W2-CommCompSpecificationRead	<p>Used to read a Comm Comp Specification record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationComponentSpec using the W2-CommunicationComponentSpec Business Object.</p>
W2-CommCompSpecificationUpdate	<p>Used to update a Comm Comp Specification record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationComponentSpec using the W2-CommunicationComponentSpec Business Object.</p>
W2-CommRelaySpecificationAdd	<p>Used to add a Comm Relay Specification record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationRelaySpec using the W2-CommunicationRelaySpec Business Object.</p>
W2-CommRelaySpecificationDelete	<p>Used to delete a Comm Relay Specification record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationRelaySpec using the W2-CommunicationRelaySpec Business Object.</p>
W2-CommRelaySpecificationRead	<p>Used to read a Comm Relay Specification record.</p> <p>This component invokes the Inbound Web Service ATW2CommunicationRelaySpec using the W2-CommunicationRelaySpec Business Object.</p>

Component	Description
W2-CommRelaySpecificationUpdate	Used to update a Comm Relay Specification record.  This component invokes the Inbound Web Service ATW2CommunicationRelaySpec using the W2-CommunicationRelaySpec Business Object.
W2-CommunicationRelayAdd	Used to add a Communication Relay record.  This component invokes the Inbound Web Service ATW2CommunicationRelay using the W2-CommunicationRelay Business Object.
W2-CommunicationRelayDelete	Used to delete a Communication Relay record.  This component invokes the Inbound Web Service ATW2CommunicationRelay using the W2-CommunicationRelay Business Object.
W2-CommunicationRelayRead	Used to read a Communication Relay record.  This component invokes the Inbound Web Service ATW2CommunicationRelay using the W2-CommunicationRelay Business Object.
W2-CommunicationRelayUpdate	Used to update a Communication Relay record.  This component invokes the Inbound Web Service ATW2CommunicationRelay using the W2-CommunicationRelay Business Object.
W2-FirmwareSpecificationAdd	Used to add a Firmware Specification record.  This component invokes the Inbound Web Service ATW2FirmwareSpecification using the W2-FirmwareSpecification Business Object.
W2-FirmwareSpecificationDelete	Used to delete a Firmware Specification record.  This component invokes the Inbound Web Service ATW2FirmwareSpecification using the W2-FirmwareSpecification Business Object.
W2-FirmwareSpecificationRead	Used to read a Firmware Specification record.  This component invokes the Inbound Web Service ATW2FirmwareSpecification using the W2-FirmwareSpecification Business Object.
W2-FirmwareSpecificationUpdate	Used to update a Firmware Specification record.  This component invokes the Inbound Web Service ATW2FirmwareSpecification using the W2-FirmwareSpecification Business Object.

Component	Description
W2-FirmwareVersionAdd	Used to add a Firmware Version record.  This component invokes the Inbound Web Service ATW2FirmwareVersion using the W2-FirmwareVersion Business Object.
W2-FirmwareVersionDelete	Used to delete a Firmware Version record.  This component invokes the Inbound Web Service ATW2FirmwareVersion using the W2-FirmwareVersion Business Object.
W2-FirmwareVersionRead	Used to read a Firmware Version record.  This component invokes the Inbound Web Service ATW2FirmwareVersion using the W2-FirmwareVersion Business Object.
W2-FirmwareVersionUpdate	Used to update a Firmware Version record.  This component invokes the Inbound Web Service ATW2FirmwareVersion using the W2-FirmwareVersion Business Object.
W2-ManualMeterAdd	Used to add an Analog Meter record.  This component invokes the Inbound Web Service ATW2ManualMeter using the W2-ManualMeter Business Object.
W2-ManualMeterDelete	Used to delete an existing Analog Meter record.  This component invokes the Inbound Web Service ATW2ManualMeter using the W2-ManualMeter Business Object.
W2-ManualMeterRead	Used to read an existing Analog Meter record.  This component invokes the Inbound Web Service ATW2ManualMeter using the W2-ManualMeter Business Object.
W2-ManualMeterUpdate	Used to update an existing Analog Meter record.  This component invokes the Inbound Web Service ATW2ManualMeter using the W2-ManualMeter Business Object.
W2-ManualMeterSpecificationAdd	Used to add an Analog Meter Specification record.  This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.



Component	Description
W2-ManualMeterSpecificationDelete	<p>Used to delete an Analog Meter Specification record.</p> <p>This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.</p>
W2-ManualMeterSpecificationRead	<p>Used to read an Analog Meter Specification record.</p> <p>This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.</p>
W2-ManualMeterSpecificationUpdate	<p>Used to update an Analog Meter Specification record.</p> <p>This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.</p>
W2-SmartMeterAdd	<p>Used to add a Smart Meter record.</p> <p>This component invokes the Inbound Web Service ATW2SmartMeter using the W2-SmartMeter Business Object.</p>
W2-SmartMeterDelete	<p>Used to delete an existing Smart Meter record.</p> <p>This component invokes the Inbound Web Service ATW2SmartMeter using the W2-SmartMeter Business Object.</p>
W2-SmartMeterRead	<p>Used to read an existing Smart Meter record.</p> <p>This component invokes the Inbound Web Service ATW2SmartMeter using the W2-SmartMeter Business Object.</p>
W2-SmartMeterUpdate	<p>Used to update an existing Smart Meter record.</p> <p>This component invokes the Inbound Web Service ATW2SmartMeter using the W2-SmartMeter Business Object.</p>
W2-SmartMeterSpecificationAdd	<p>Used to add a Smart Meter Specification record.</p> <p>This component invokes the Inbound Web Service ATW2SmartMeterSpecification using the W2-SmartMeterSpecification Business Object.</p>
W2-SmartMeterSpecificationDelete	<p>Used to delete a Smart Meter Specification record.</p> <p>This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.</p>

Component	Description
W2-SmartMeterSpecificationRead	<p>Used to read a Smart Meter Specification record.</p> <p>This component invokes the Inbound Web Service ATW2SmartMeterSpecification using the W2-SmartMeterSpecification Business Object.</p>
W2-SmartMeterSpecificationUpdate	<p>Used to update a Smart Meter Specification record.</p> <p>This component invokes the Inbound Web Service ATW2SmartMeterSpecification using the W2-SmartMeterSpecification Business Object.</p>
W2-SmartTestAdd	<p>Used to add a Smart Device Test record.</p> <p>This component invokes the Inbound Web Service ATW2SmartTest using the W2-SmartTest Business Object.</p>
W2-SmartTestDelete	<p>Used to delete an existing Smart Device Test record.</p> <p>This component invokes the Inbound Web Service ATW2SmartTest using the W2-SmartTest Business Object.</p>
W2-SmartTestRead	<p>Used to query an existing Smart Device Test record.</p> <p>This component invokes the Inbound Web Service ATW2SmartTest using the W2-SmartTest Business Object.</p>
W2-SmartTestUpdate	<p>Used to update an existing Smart Device Test record.</p> <p>This component invokes the Inbound Web Service ATW2SmartTest using the W2-SmartTest Business Object.</p>
W1-AACCfgDeviceUpgradeAdd	<p>Used to add a Configuration - Device - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATW1AACCfgDeviceUpgrade using W1-AACCfgDeviceUpgrade Business Object.</p>
W1-AACCfgDeviceUpgradeDelete	<p>Used to delete an existing a Configuration - Device - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATW1AACCfgDeviceUpgrade using W1-AACCfgDeviceUpgrade Business Object.</p>
W1-AACCfgDeviceUpgradeRead	<p>Used to query an existing Configuration - Device - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATW1AACCfgDeviceUpgrade using W1-AACCfgDeviceUpgrade Business Object.</p>

Component	Description
W1-AACCFgDeviceUpgradeUpdate	<p>Used to update an existing Configuration - Device - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATW1AACCFgDeviceUpgrade using W1-AACCFgDeviceUpgrade Business Object.</p>
W1-AACfgDeviceUpgradeAdd	<p>Used to create a Configuration - Device - Asset to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1AACfgDeviceUpgrade using W1-AACfgDeviceUpgrade Business Object.</p>
W1-AACfgDeviceUpgradeDelete	<p>Used to delete an existing Configuration - Device - Asset to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1AACfgDeviceUpgrade using W1-AACfgDeviceUpgrade Business Object.</p>
W1-AACfgDeviceUpgradeRead	<p>Used to query an existing Configuration - Device - Asset to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1AACfgDeviceUpgrade using W1-AACfgDeviceUpgrade Business Object.</p>
W1-AACfgDeviceUpgradeUpdate	<p>Used to update an existing Configuration - Device - Asset to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1AACfgDeviceUpgrade using W1-AACfgDeviceUpgrade Business Object.</p>
W1-ACACCFgDeviceUpgradeAdd	<p>Used to create a Configuration - Device - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.</p>
W1-ACACCFgDeviceUpgradeDelete	<p>Used to delete an existing Configuration - Device - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.</p>
W1-ACACCFgDeviceUpgradeRead	<p>Used to query an existing Configuration - Device - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.</p>

Component	Description
W1-ACACCfgDeviceUpgradeUpdate	<p>Used to update an existing Configuration - Device - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW1ACACCfgDeviceUpgrade using W1-ACACCfgDeviceUpgrade Business Object.</p>
W1-ACACfgDeviceUpgradeAdd	<p>Used to create a Configuration - Device - Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.</p>
W1-ACACfgDeviceUpgradeDelete	<p>Used to delete an existing Configuration - Device - Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.</p>
W1-ACACfgDeviceUpgradeRead	<p>Used to query an existing Configuration - Device - Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.</p>
W1-ACACfgDeviceUpgradeUpdate	<p>Used to update an existing Configuration - Device - Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.</p>
W1-ACCfgDeviceUpgradeAdd	<p>Used to create a Configuration - Device - Component record.</p> <p>This component invokes the Inbound Web Service ATW1ACCfgDeviceUpgrade using W1-ACCfgDeviceUpgrade Business Object.</p>
W1-ACCfgDeviceUpgradeDelete	<p>Used to delete an existing Device - Component record.</p> <p>This component invokes the Inbound Web Service ATW1ACCfgDeviceUpgrade using W1-ACCfgDeviceUpgrade Business Object.</p>
W1-ACCfgDeviceUpgradeRead	<p>Used to query an existing Device - Component record.</p> <p>This component invokes the Inbound Web Service ATW1ACCfgDeviceUpgrade using W1-ACCfgDeviceUpgrade Business Object.</p>

Component	Description
W1-ACCfgDeviceUpgradeUpdate	<p>Used to update an existing Device - Component record.</p> <p>This component invokes the Inbound Web Service ATW1ACCfgDeviceUpgrade using W1-ACCfgDeviceUpgrade Business Object.</p>
W1-ACfgDeviceUpgradeAdd	<p>Used to create a Configuration - Device Asset record.</p> <p>This component invokes the Inbound Web Service ATW1ACfgDeviceUpgrade using W1-ACfgDeviceUpgrade Business Object.</p>
W1-ACfgDeviceUpgradeDelete	<p>Used to delete a Configuration - Device Asset record.</p> <p>This component invokes the Inbound Web Service ATW1ACfgDeviceUpgrade using W1-ACfgDeviceUpgrade Business Object.</p>
W1-ACfgDeviceUpgradeRead	<p>Used to query an existing Configuration - Device Asset record.</p> <p>This component invokes the Inbound Web Service ATW1ACfgDeviceUpgrade using W1-ACfgDeviceUpgrade Business Object.</p>
W1-ACfgDeviceUpgradeUpdate	<p>Used to update an existing Configuration - Device Asset record.</p> <p>This component invokes the Inbound Web Service ATW1ACfgDeviceUpgrade using W1-ACfgDeviceUpgrade Business Object.</p>
W1-ActivityComplInboundCommAdd	<p>Used to create an Inbound Communication record.</p> <p>This component invokes the Inbound Web Service ATW1ActivityComplInboundComm using W1-ActivityComplInboundComm Business Object.</p>
W1-ActivityComplInboundCommDelete	<p>Used to create an Inbound Communication record.</p> <p>This component invokes the Inbound Web Service ATW1ActivityComplInboundComm using W1-ActivityComplInboundComm Business Object.</p>
W1-ActivityComplInboundCommRead	<p>Used to query an existing Inbound Communication Record.</p> <p>This component invokes the Inbound Web Service ATW1ActivityComplInboundComm using W1-ActivityComplInboundComm Business Object.</p>

Component	Description
W1-ActivityComplInboundCommUpdate	<p>Used to update an existing Inbound Communication Record.</p> <p>This component invokes the Inbound Web Service ATW1ActivityComplInboundComm using W1-ActivityComplInboundComm Business Object.</p>
W1-ActivityNotesAdd	<p>Used to create an Activity Notes record.</p> <p>This component invokes the Inbound Web Service ATW1ActivityNotes W1-ActivityNotes using Business Object.</p>
W1-ActivityNotesDelete	<p>Used to delete an existing Activity Notes record.</p> <p>This component invokes the Inbound Web Service ATW1ActivityNotes using W1-ActivityNotes Business Object.</p>
W1-ActivityNotesRead	<p>Used to query an existing Activity Notes record.</p> <p>This component invokes the Inbound Web Service ATW1ActivityNotes using W1-ActivityNotes Business Object.</p>
W1-ActivityNotesUpdate	<p>Used to query an existing Activity Notes record.</p> <p>This component invokes the Inbound Web Service ATW1ActivityNotes using W1-ActivityNotes Business Object.</p>
W1-AdHocActCoreNoLocationAdd	<p>Used to create an Adhoc Activity Core No Location record.</p> <p>This component invokes the Inbound Web Service ATW1AdHocActCoreNoLocation using W1-AdHocActCoreNoLocation Business Object.</p>
W1-AdHocActCoreNoLocationDelete	<p>Used to delete an existing Adhoc Activity Core No Location record.</p> <p>This component invokes the Inbound Web Service ATW1AdHocActCoreNoLocation using W1-AdHocActCoreNoLocation Business Object.</p>
W1-AdHocActCoreNoLocationRead	<p>Used to query an existing Adhoc Activity Core No Location record.</p> <p>This component invokes the Inbound Web Service ATW1AdHocActCoreNoLocation using W1-AdHocActCoreNoLocation Business Object.</p>

Component	Description
W1-AdHocActCoreNoLocationUpdate	Used to delete an existing Adhoc Activity Core No Location record.  This component invokes the Inbound Web Service ATW1AdHocActCoreNoLocation using W1-AdHocActCoreNoLocation Business Object.
W1-AdHocActivityCoreAdd	Used to create an Adhoc Activity Core record.  This component invokes the Inbound Web Service ATW1AdHocActivityCore using W1-AdHocActivityCore Business Object.
W1-AdHocActivityCoreDelete	Used to delete an existing Adhoc Activity Core record.  This component invokes the Inbound Web Service ATW1AdHocActivityCore using W1-AdHocActivityCore Business Object.
W1-AdHocActivityCoreRead	Used to query existing Adhoc Activity Core record.  This component invokes the Inbound Web Service ATW1AdHocActivityCore using W1-AdHocActivityCore Business Object.
W1-AdHocActivityCoreUpdate	Used to query existing Adhoc Activity Core record.  This component invokes the Inbound Web Service ATW1AdHocActivityCore using W1-AdHocActivityCore Business Object.
W1-AssetCompCfgWOAdd	Used to create a Configuration - Asset Component record.  This component invokes the Inbound Web Service ATW1AssetCompCfgWO using W1-AssetCompCfgWO Business Object.
W1-AssetCompCfgWODelete	Used to delete an existing Configuration - Asset Component record.  This component invokes the Inbound Web Service ATW1AssetCompCfgWO using W1-AssetCompCfgWO Business Object.
W1-AssetCompCfgWORead	Used to delete an existing Configuration - Asset Component record.  This component invokes the Inbound Web Service ATW1AssetCompCfgWO using W1-AssetCompCfgWO Business Object.

Component	Description
W1-AssetCompCfgWOUpdate	<p>Used to update an existing Configuration - Asset Component record.</p> <p>This component invokes the Inbound Web Service ATW1AssetCompCfgWO using W1-AssetCompCfgWO Business Object.</p>
W1-AssetCompToAssetCfgWOAdd	<p>Used to create a Configuration - Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1AssetCompToAssetCfgWO using W1-AssetCompToAssetCfgWO Business Object.</p>
W1-AssetCompToAssetCfgWODelete	<p>Used to delete a Configuration - Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1AssetCompToAssetCfgWO using W1-AssetCompToAssetCfgWO Business Object.</p>
W1-AssetCompToAssetCfgWORead	<p>Used to update an existing Configuration - Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW1AssetCompToAssetCfgWO using W1-AssetCompToAssetCfgWO Business Object.</p>
W1-AssetCompToAssetCfgWOUpdate	<p>Used to update an existing Configuration - Component to Asset record.</p> <p>This component invokes the Inbound Web Service used to update an existing Configuration - Component using W1-AssetCompToAssetCfgWO Business Object.</p>
W1-AssetCompToAssetCompCfgWOAdd	<p>Used to create an Configuration - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW1AssetCompToAssetCompCfgWO using W1-AssetCompToAssetCompCfgWO Business Object.</p>
W1-AssetCompToAssetCompCfgWODelete	<p>Used to delete an existing Configuration - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW1AssetCompToAssetCompCfgWO using W1-AssetCompToAssetCompCfgWO Business Object.</p>
W1-AssetCompToAssetCompCfgWORead	<p>Used to query an existing Configuration - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW1AssetCompToAssetCompCfgWO using W1-AssetCompToAssetCompCfgWO Business Object.</p>



Component	Description
W1-AssetCompToAssetCompCfg WOUpdate	Used to update an existing Configuration - Component to Component record.  This component invokes the Inbound Web Service ATW1AssetCompToAssetCompCfgWO using W1-AssetCompToAssetCompCfgWO Business Object.
W1-AssetCriteriaActGeneratorAdd	Used to create an Activity Generator - Asset Criteria record.  This component invokes the Inbound Web Service ATW1AssetCriteriaActGenerator using W1-AssetCriteriaActGenerator Business Object.
W1-AssetCriteriaActGeneratorDelete	Used to delete an existing Activity Generator - Asset Criteria. This component invokes the Inbound Web Service ATW1AssetCriteriaActGenerator using W1-AssetCriteriaActGenerator Business Object.
W1-AssetCriteriaActGeneratorRead	Used to query an existing Activity Generator - Asset Criteria record.  This component invokes the Inbound Web Service ATW1AssetCriteriaActGenerator using W1-AssetCriteriaActGenerator Business Object.
W1-AssetCriteriaActGeneratorUpdate	Used to query an existing Activity Generator - Asset Criteria record.  This component invokes the Inbound Web Service ATW1AssetCriteriaActGenerator using W1-AssetCriteriaActGenerator Business Object.
W1-AssetListActGeneratorAdd	Used to create an Activity Generator - Asset List record. This component invokes the Inbound Web Service ATW1AssetListActGenerator using W1-AssetListActGenerator Business Object.
W1-AssetListActGeneratorDelete	Used to delete an existing Activity Generator - Asset List record.  This component invokes the Inbound Web Service ATW1AssetListActGenerator using W1-AssetListActGenerator Business Object.
W1-AssetListActGeneratorRead	Used to query an existing Activity Generator - Asset List record.  This component invokes the Inbound Web Service ATW1AssetListActGenerator using W1-AssetListActGenerator Business Object.

Component	Description
W1-AssetListActGeneratorUpdate	Used to update an existing Activity Generator - Asset List record.  This component invokes the Inbound Web Service ATW1AssetListActGenerator using W1-AssetListActGenerator Business Object.
W1-AssetReplicationActivityAdd	Used to create an Asset Replication Activity record.  This component invokes the Inbound Web Service ATW1AssetReplicationActivity using W1-AssetReplicationActivity Business Object.
W1-AssetReplicationActivityDelete	Used to delete an existing Asset Replication Activity record. This component invokes the Inbound Web Service ATW1AssetReplicationActivity using W1-AssetReplicationActivity Business Object.
W1-AssetReplicationActivityRead	Used to query an existing Asset Replication Activity record.  This component invokes the Inbound Web Service ATW1AssetReplicationActivity using W1-AssetReplicationActivity Business Object.
W1-AssetReplicationActivityUpdate	Used to update an existing Asset Replication Activity record.  This component invokes the Inbound Web Service ATW1AssetReplicationActivity using W1-AssetReplicationActivity Business Object.
W1-AssetReplicationComplEventAdd	Used to create a Completion Event record.  This component invokes the Inbound Web Service ATW1AssetReplicationComplEvent using W1-AssetReplicationComplEvent Business Object.
W1-AssetReplicationComplEventDelete	Used to delete a Completion Event record.  This component invokes the Inbound Web Service ATW1AssetReplicationComplEvent using W1-AssetReplicationComplEvent Business Object.
W1-AssetReplicationComplEventRead	Used to query an existing Completion Event record.  This component invokes the Inbound Web Service ATW1AssetReplicationComplEvent using W1-AssetReplicationComplEvent Business Object.
W1-AssetReplicationComplEventUpdate	Used to update an existing Completion Event record.  This component invokes the Inbound Web Service ATW1AssetReplicationComplEvent using W1-AssetReplicationComplEvent Business Object.

Component	Description
W1-AssetToAssetCompCfgWOAdd	<p>Used to create a Configuration - Asset to Component record</p> <p>This component invokes the Inbound Web Service ATW1AssetToAssetCompCfgWO using W1-AssetToAssetCompCfgWO Business Object.</p>
W1-AssetToAssetCompCfgWODElete	<p>Used to delete an existing Configuration - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATD1CutServiceForNonPayment using D1-CutServiceForNonPayment Business Object.</p>
W1-AssetToAssetCompCfgWORead	<p>Used to query an existing Configuration - Asset to Component record</p> <p>This component invokes the Inbound Web Service ATW1AssetToAssetCompCfgWO using W1-AssetToAssetCompCfgWO Business Object.</p>
W1-AssetToAssetCompCfgWOUpdate	<p>Used to update an existing Configuration - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATD1CutServiceForNonPayment using D1-CutServiceForNonPayment Business Object.</p>
W1-BasicWorkOrderAdd	<p>Used to create a Basic Work Order record.</p> <p>This component invokes the Inbound Web Service ATW1BasicWorkOrder using W1-BasicWorkOrder Business Object.</p>
W1-BasicWorkOrderDelete	<p>Used to delete an existing a Basic Work Order record.</p> <p>This component invokes the Inbound Web Service ATW1BasicWorkOrder using W1-BasicWorkOrder Business Object.</p>
W1-BasicWorkOrderRead	<p>Used to query an existing a Basic Work Order record.</p> <p>This component invokes the Inbound Web Service ATW1BasicWorkOrder using W1-BasicWorkOrder Business Object.</p>
W1-BasicWorkOrderUpdate	<p>Used to update an existing a Basic Work Order record.</p> <p>This component invokes the Inbound Web Service ATW1BasicWorkOrder using W1-BasicWorkOrder Business Object.</p>

Component	Description
W1- CompnAssetListActGeneratorAdd	Used to create an Activity Generator - Component List record.  This component invokes the Inbound Web Service ATW1CompnAssetListActGenerator using W1-CompnAssetListActGenerator Business Object.
W1- CompnAssetListActGeneratorDelete	Used to update an existing an Activity Generator - Component List record.  This component invokes the Inbound Web Service ATW1CompnAssetListActGenerator using W1-CompnAssetListActGenerator Business Object.
W1- CompnAssetListActGeneratorRead	Used to query an existing an Activity Generator - Component List record.  This component invokes the Inbound Web Service ATW1CompnAssetListActGenerator using W1-CompnAssetListActGenerator Business Object.
W1- CompnAssetListActGeneratorUpdate	Used to update an existing an Activity Generator - Component List record.  This component invokes the Inbound Web Service ATW1CompnAssetListActGenerator using W1-CompnAssetListActGenerator Business Object.
W1-CompnCriteriaActGeneratorAdd	Used to create an Activity Generator - Component Criteria record.  This component invokes the Inbound Web Service ATW1CompnCriteriaActGenerator using W1-CompnCriteriaActGenerator Business Object.
W1- CompnCriteriaActGeneratorDelete	Used to delete an existing Activity Generator - Component Criteria record.  This component invokes the Inbound Web Service ATW1CompnCriteriaActGenerator using W1-CompnCriteriaActGenerator Business Object.
W1-CompnCriteriaActGeneratorRead	Used to query an existing Activity Generator - Component Criteria record.  This component invokes the Inbound Web Service ATW1CompnCriteriaActGenerator using W1-CompnCriteriaActGenerator Business Object.
W1- CompnCriteriaActGeneratorUpdate	Used to update an existing Activity Generator - Component Criteria record.  This component invokes the Inbound Web Service ATW1CompnCriteriaActGenerator using W1-CompnCriteriaActGenerator Business Object.

Component	Description
W1-CrAnyServiceHistoryCmplEvtAdd	<p>Used to creating a Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CrAnyServiceHistoryCmplEvt using W1-CrAnyServiceHistoryCmplEvt Business Object.</p>
W1-CrAnyServiceHistoryCmplEvtDelete	<p>Used to delete a Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CrAnyServiceHistoryCmplEvt using W1-CrAnyServiceHistoryCmplEvt Business Object.</p>
W1-rAnyServiceHistoryCmplEvtRead	<p>Used to query an existing Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CrAnyServiceHistoryCmplEvt using W1-CrAnyServiceHistoryCmplEvt Business Object.</p>
W1-CrAnyServiceHistoryCmplEvtUpdate	<p>Used to update an existing Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CrAnyServiceHistoryCmplEvt using W1-CrAnyServiceHistoryCmplEvt Business Object.</p>
W1-CreActivityPayCmpEvtAdd	<p>Used to create a Create Specific Activity Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreActivityPayCmpEvt using W1-CreActivityPayCmpEvt Business Object.</p>
W1-CreActivityPayCmpEvtDelete	<p>Used to delete an existing Create Specific Activity. Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreActivityPayCmpEvt using W1-CreActivityPayCPayment Business Object.</p>
W1-CreActivityPayCmpEvtRead	<p>Used to query an existing Create Specific Activity. Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreActivityPayCmpEvt using W1-CreActivityPayCPayment Business Object.</p>
W1-CreActivityPayCmpEvtUpdate	<p>Used to query an existing Create Specific Activity Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreActivityPayCmpEvt using W1-CreActivityPayCPayment Business Object.</p>

Component	Description
W1-CreAssetPayCmpEvtAdd	Used to Create Specific Asset Completion Event.  This component invokes the Inbound Web Service ATW1CreAssetPayCmpEvt using W1-CreAssetPayCmpEvt Business Object.
W1-CreAssetPayCmpEvtDelete	Used to delete an existing Specific Asset Completion Event record.  This component invokes the Inbound Web Service ATW1CreAssetPayCmpEvt using W1-CreAssetPayCmpEvt Business Object.
W1-CreAssetPayCmpEvtRead	Used to query an existing Specific Asset Completion Event record.  This component invokes the Inbound Web Service ATW1CreAssetPayCmpEvt using W1-CreAssetPayCmp Business Object.
W1-CreAssetPayCmpEvtUpdate	Used to query an existing Specific Asset Completion Event record.  This component invokes the Inbound Web Service ATW1CreAssetPayCmpEvt using W1-CreAssetPayCmp Business Object.
W1-CreateMobileWOInboundCommAdd	Used to create a Mobile Work Order Inbound Communication record.  This component invokes the Inbound Web Service ATW1CreateMobileWOInboundComm using W1-CreateMobileWOInboundComm Business Object.
W1-CreateMobileWOInboundCommDelete	Used to delete an existing Mobile Work Order Inbound Communication record.  This component invokes the Inbound Web Service ATW1CreateMobileWOInboundComm using W1-CreateMobileWOInboundComm Business Object.
W1-CreateMobileWOInboundCommRead	Used to query existing Mobile Work Order Inbound Communication record.  This component invokes the Inbound Web Service ATW1CreateMobileWOInboundComm using W1-CreateMobileWOInbound Business Object.
W1-CreateMobileWOInboundCommUpdate	Used to query existing Mobile Work Order Inbound Communication record.  This component invokes the Inbound Web Service ATW1CreateMobileWOInboundComm using W1-CreateMobileWOInbound Business Object.

Component	Description
W1-CreNodeAttachCmpEvtAdd	<p>Used to create a Location Attachment Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreNodeAttachCmpEvt using W1-CreNodeAttachCmpEvt Business Object.</p>
W1-CreNodeAttachCmpEvtDelete	<p>Used to delete an existing Location Attachment Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreNodeAttachCmpEvt using W1-CreNodeAttachCmpEvt Business Object.</p>
W1-CreNodeAttachCmpEvtRead	<p>Used to query an existing Location Attachment Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreNodeAttachCmpEvt using W1-CreNodeAttachCmpEvt Business Object.</p>
W1-CreNodeAttachCmpEvtUpdate	<p>Used to update an existing Location Attachment Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreNodeAttachCmpEvt using W1-CreNodeAttachCmpEvt Business Object.</p>
W1-CreServiceHistoryAttCmpEvAdd	<p>Used to create a Service History Attachment Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreServiceHistoryAttCmpEvt using W1-CreServiceHistoryAttCmpEvt Business Object.</p>
W1-CreServiceHistoryAttCmpEvtDelete	<p>Used to delete an existing Service History Attachment Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreServiceHistoryAttCmpEvt using W1-CreServiceHistoryAttCmpEvt Business Object.</p>
W1-CreServiceHistoryAttCmpEvtRead	<p>Used to query an existing Service History Attachment Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreServiceHistoryAttCmpEvt using W1-CreServiceHistoryAttCmpEvt Business Object.</p>
W1-CreServiceHistoryAttCmpEvtUpdate	<p>Used to update an existing Service History Attachment Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1CreServiceHistoryAttCmpEvt using W1-CreServiceHistoryAttCmpEvt Business Object.</p>

Component	Description
W1- CreServiceHistoryPayCmpEvtAdd	Used to create a Specific Service History Completion Event record.  This component invokes the Inbound Web Service ATW1CreServiceHistoryPayCmpEvt using W1-CreServiceHistoryPayCmpEvt Business Object.
W1- CreServiceHistoryPayCmpEvtDelete	Used to delete an existing Specific Service History Completion Event record.  This component invokes the Inbound Web Service ATW1CreServiceHistoryPayCmpEvt using W1-CreServiceHistoryPayCmpEvt Business Object.
W1- CreServiceHistoryPayCmpEvtRead	Used to query an existing Specific Service History Completion Event record.  This component invokes the Inbound Web Service ATW1CreServiceHistoryPayCmpEvt using W1-CreServiceHistoryPayCmpEvt Business Object.
W1- CreServiceHistoryPayCmpEvtUpdate	Used to update an existing Specific Service History Completion Event record.  This component invokes the Inbound Web Service ATW1CreServiceHistoryPayCmpEvt using W1-CreServiceHistoryPayCmpEvt Business Object.
W1-CreSvcHistCmpEvtAdd	Used to Create Any Service History Completion Event (Online Only) record.  This component invokes the Inbound Web Service ATW1CreSvcHistCmpEvt using W1-CreSvcHistCmpEvt Business Object.
W1-CreSvcHistCmpEvtDelete	Used to delete existing Create Any Service History Completion Event (Online Only) record.  This component invokes the Inbound Web Service ATW1CreSvcHistCmpEvt using W1-CreSvcHistCmpEvt Business Object.
W1-CreSvcHistCmpEvtRead	Used to query an existing Create Any Service History Completion Event (Online Only) record.  This component invokes the Inbound Web Service ATW1CreSvcHistCmpEvt using W1-CreSvcHistCmpEvt Business Object.
W1-CreSvcHistCmpEvtUpdate	Used to update an existing Create Any Service History Completion Event (Online Only) record.  This component invokes the Inbound Web Service ATW1CreSvcHistCmpEvt using W1-CreSvcHistCmpEvt Business Object.



Component	Description
W1-FollowUpSkippedAssetsCmpEvtAdd	<p>Used to create a Follow-Up Skipped Assets Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1FollowUpSkippedAssetsCmpEvt using W1-FollowUpSkippedAssetsCmpEvt Business Object.</p>
W1-FollowUpSkippedAssetsCmpEvtDelete	<p>Used to delete an existing a Follow-Up Skipped As Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1FollowUpSkippedAssetsCmpEvt using W1-FollowUpSkippedAssetsCmpEvt Business Object.</p>
W1-FollowUpSkippedAssetsCmpEvtRead	<p>Used to query an existing a Follow-Up Skipped As Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1FollowUpSkippedAssetsCmpEvt W1-FollowUpSkippedAssetsCmpEvt Business Object.</p>
W1-FollowUpSkippedAssetsCmpEvtUpdate	<p>Used to update an existing a Follow-Up Skipped As Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1FollowUpSkippedAssetsCmpEvt using W1-FollowUpSkippedAssetsCmpEvBusiness Object.</p>
W1-LocalActivityCoreAdd	<p>Used to create a Local Activity Core record.</p> <p>This component invokes the Inbound Web Service ATW1LocalActivityCore using ATW1LocalActivityCore Business Object.</p>
W1-LocalActivityCoreDelete	<p>Used to delete an existing Local Activity Core record.</p> <p>This component invokes the Inbound Web Service ATW1LocalActivityCore using W1-LocalActivityCore Business Object.</p>
W1-LocalActivityCoreRead	<p>Used to query an existing Local Activity Core record.</p> <p>This component invokes the Inbound Web Service ATW1LocalActivityCore using W1-LocalActivityCore Business Object.</p>
W1-LocalActivityCoreUpdate	<p>Used to update an existing Local Activity Core record.</p> <p>This component invokes the Inbound Web Service ATW1LocalActivityCore using W1-LocalActivityCore Business Object.</p>

Component	Description
W1-MobileUpdWorkedAssetCmpEvtAdd	<p>Used to create a Mobile Update Worked Assets Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1MobileUpdWorkedAssetCmpEvt using W1-MobileUpdWorkedAssetCmpEvt Business Object.</p>
W1-MobileUpdWorkedAssetCmpEvt Delete	<p>Used to delete an existing Mobile Update Worked Assets Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1MobileUpdWorkedAssetCmpEvt using W1-MobileUpdWorkedAssetCmpEvt Business Object.</p>
W1-MobileUpdWorkedAssetCmpEvtRead	<p>Used to query an existing Mobile Update Worked Assets Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1MobileUpdWorkedAssetCmpEvt using W1-MobileUpdWorkedAssetCmpEvt Business Object.</p>
W1-MobileUpdWorkedAssetCmpUpdate	<p>Used to update an existing Mobile Update Worked Assets Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1MobileUpdWorkedAssetCmpEvt using W1-MobileUpdWorkedAssetCmpEvt Business Object.</p>
W1-NodeCriteriaActGeneratorAdd	<p>Used to create an Activity Generator - Node Criteria record.</p> <p>This component invokes the Inbound Web Service ATW1NodeCriteriaActGenerator using W1-NodeCriteriaActGenerator Business Object.</p>
W1-NodeCriteriaActGeneratorDelete	<p>Used to delete an existing Activity Generator - Node Criteria record.</p> <p>This component invokes the Inbound Web Service ATW1NodeCriteriaActGenerator using W1-NodeCriteriaActGenerator Business Object.</p>
W1-NodeCriteriaActGeneratorRead	<p>Used to query an existing Activity Generator - Node Criteria record.</p> <p>This component invokes the Inbound Web Service ATW1NodeCriteriaActGenerator using W1-NodeCriteriaActGenerator Business Object.</p>
W1-NodeCriteriaActGeneratorUpdate	<p>Used to delete an existing Activity Generator - Node Criteria record.</p> <p>This component invokes the Inbound Web Service ATW1NodeCriteriaActGenerator using W1-NodeCriteriaActGenerator Business Object.</p>

Component	Description
W1-OutboundActivityCoreAdd	<p>Used to create an Outbound Activity Core record.</p> <p>This component invokes the Inbound Web Service ATW1OutboundActivityCore using W1-OutboundActivityCore Business Object.</p>
W1-OutboundActivityCoreDelete	<p>Used to delete an existing Outbound Activity Core record.</p> <p>This component invokes the Inbound Web Service ATW1OutboundActivityCore using W1-OutboundActivityCore Business Object.</p>
W1-OutboundActivityCoreRead	<p>Used to query an existing Outbound Activity Core record.</p> <p>This component invokes the Inbound Web Service ATW1OutboundActivityCore W1-OutboundActivityCore Business Object.</p>
W1-OutboundActivityCoreUpdate	<p>Used to update an existing Outbound Activity Core record.</p> <p>This component invokes the Inbound Web Service ATW1OutboundActivityCore using W1-OutboundActivityCore Business Object.</p>
W1-ReplaceAssetLocalAdd	<p>Used to create a Replace Asset Local record.</p> <p>This component invokes the Inbound Web Service ATW1ReplaceAssetLocal using W1-ReplaceAssetLocal Business Object.</p>
W1-ReplaceAssetLocalDelete	<p>Used to delete an existing Replace Asset Local record.</p> <p>This component invokes the Inbound Web Service ATW1ReplaceAssetLocal using W1-ReplaceAssetLocal Business Object.</p>
W1-ReplaceAssetLocalRead	<p>Used to query an existing Replace Asset Local record.</p> <p>This component invokes the Inbound Web Service ATW1ReplaceAssetLocal using W1-ReplaceAssetLocal Business Object.</p>
W1-ReplaceAssetLocalUpdate	<p>Used to update an existing Replace Asset Local record.</p> <p>This component invokes the Inbound Web Service ATW1ReplaceAssetLocal using W1-ReplaceAssetLocal Business Object.</p>

Component	Description
W1-ReplaceAssetOutboundAdd	<p>Used to create a Replace Asset Outbound record.</p> <p>This component invokes the Inbound Web Service ATW1ReplaceAssetOutbound using W1-ReplaceAssetOutbound Business Object.</p>
W1-ReplaceAssetOutboundDelete	<p>Used to delete an existing a Replace Asset Outbound record.</p> <p>This component invokes the Inbound Web Service ATW1ReplaceAssetOutbound using W1-ReplaceAssetOutbound Business Object.</p>
W1-ReplaceAssetOutboundRead	<p>Used to query an existing a Replace Asset Outbound record.</p> <p>This component invokes the Inbound Web Service ATW1ReplaceAssetOutbound using W1-ReplaceAssetOutbound Business Object.</p>
W1-ReplaceAssetOutboundUpdate	<p>Used to update an existing a Replace Asset Outbound record.</p> <p>This component invokes the Inbound Web Service ATW1ReplaceAssetOutbound using W1-ReplaceAssetOutbound Business Object.</p>
W1-SingleAssetCfgWOAdd	<p>Used to create a Configuration - Single Asset record.</p> <p>This component invokes the Inbound Web Service ATW1SingleAssetCfgWO using W1-SingleAssetCfgWO Business Object.</p>
W1-SingleAssetCfgWODelete	<p>Used to delete an existing Configuration - Single Asset record.</p> <p>This component invokes the Inbound Web Service ATW1SingleAssetCfgWO using W1-SingleAssetCfgWO Business Object.</p>
W1-SingleAssetCfgWORead	<p>Used to query an existing Configuration - Single Asset record.</p> <p>This component invokes the Inbound Web Service ATW1SingleAssetCfgWO using W1-SingleAssetCfgWO Business Object.</p>
W1-SingleAssetCfgWOUpdate	<p>Used to update an existing Configuration - Single Asset record.</p> <p>This component invokes the Inbound Web Service ATW1SingleAssetCfgWO using W1-SingleAssetCfgWO Business Object.</p>

Component	Description
W1-SOMActivityAdd	Used to create a SOM Activity record.  This component invokes the Inbound Web Service ATW1SOMActivity using W1-SOMActivity Business Object.
W1-TrnAssetCmpEventAdd	Used to create a Transition Asset Completion Event record.  This component invokes the Inbound Web Service ATW1TrnAssetCmpEvent using W1-TrnAssetCmpEvent Business Object.
W1-TrnAssetCmpEventDelete	Used to delete an existing Transition Asset Completion Event record.  This component invokes the Inbound Web Service ATW1TrnAssetCmpEvent using W1-TrnAssetCmpEvent Business Object.
W1-TrnAssetCmpEventRead	Used to query an existing Transition Asset Completion record.  This component invokes the Inbound Web Service ATW1TrnAssetCmpEvent using W1-TrnAssetCmpEvent Business Object.
W1-TrnAssetCmpEventUpdate	Used to update an existing Transition Asset Completion record.  This component invokes the Inbound Web Service ATW1TrnAssetCmpEvent using W1-TrnAssetCmpEvent Business Object.
W1-UpdAssetPayCmpEvtAdd	Used to create a Update Asset Using DA Completion Event record.  This component invokes the Inbound Web Service ATW1UpdAssetPayCmpEvt using W1-UpdAssetPayCmpEvt Business Object.
W1-UpdAssetPayCmpEvtDelete	Used to delete an existing Update Asset Using DA Completion Event record.  This component invokes the Inbound Web Service ATW1UpdAssetPayCmpEvt using W1-UpdAssetPayCmpEvt Business Object.
W1-UpdAssetPayCmpEvtRead	Used to query an existing Update Asset Using DA Completion Event record.  This component invokes the Inbound Web Service ATW1UpdAssetPayCmpEvt using W1-UpdAssetPayCmpEvt Business Object.

Component	Description
W1-UpdAssetPayCmpEvtUpdate	<p>Used to update an existing Update Asset Using DA Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1UpdAssetPayCmpEvt using W1-UpdAssetPayCmpEvt Business Object.</p>
W1-UpdNodePayCmpEvtAdd	<p>Used to create an Update Location Using DA Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1UpdNodePayCmpEvt using W1-UpdNodePayCmpEvt Business Object.</p>
W1-UpdNodePayCmpEvtDelete	<p>Used to delete an existing Update Location Using DA Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1UpdNodePayCmpEvt using W1-UpdNodePayCmpEvt Business Object.</p>
W1-UpdNodePayCmpEvtRead	<p>Used to query an existing Update Location Using DA Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1UpdNodePayCmpEvt using W1-UpdNodePayCmpEvt Business Object.</p>
W1-UpdNodePayCmpEvtUpdate	<p>Used to query an existing Update Location Using DA Completion Event record.</p> <p>This component invokes the Inbound Web Service ATW1UpdNodePayCmpEvt using W1-UpdNodePayCmpEvt Business Object.</p>
W1-WorkOrderNotesAdd	<p>Used to create a Work Order Notes record.</p> <p>This component invokes the Inbound Web Service ATW1WorkOrderNotes using W1-WorkOrderNotes Business Object.</p>
W1-WorkOrderNotesDelete	<p>Used to delete an existing Work Order Notes record.</p> <p>This component invokes the Inbound Web Service ATW1WorkOrderNotes using W1-WorkOrderNotes Business Object.</p>
W1-WorkOrderNotesRead	<p>Used to query an existing Work Order Notes record.</p> <p>This component invokes the Inbound Web Service ATW1WorkOrderNotes using W1-WorkOrderNotes Business Object.</p>

Component	Description
W1-WorkOrderNotesUpdate	<p>Used to update an existing Work Order Notes record.</p> <p>This component invokes the Inbound Web Service ATW1WorkOrderNotes using W1-WorkOrderNotes Business Object.</p>
W2-AACCfgFirmwareUpgradeAdd	<p>Used to create a Configuration - Firmware - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATW2AACCfgFirmwareUpgrade using W2-AACCfgFirmwareUpgrade Business Object.</p>
W2-AACCfgFirmwareUpgradeDelete	<p>Used to delete an existing Configuration - Firmware - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATW2AACCfgFirmwareUpgrade using W2-AACCfgFirmwareUpgrade Business Object.</p>
W2-AACCfgFirmwareUpgradeRead	<p>Used to query an existing Configuration - Firmware - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATW2AACCfgFirmwareUpgrade using W2-AACCfgFirmwareUpgrade Business Object.</p>
W2-AACCfgFirmwareUpgradeUpdate	<p>Used to update an existing Configuration - Firmware - Asset to Component record.</p> <p>This component invokes the Inbound Web Service ATW2AACCfgFirmwareUpgrade using W2-AACCfgFirmwareUpgrad Business Object.</p>
W2-AACfgFirmwareUpgradeAdd	<p>Used to create a Configuration - Firmware - Asset to Asset record.</p> <p>This component invokes the Inbound Web Service ATW2AACfgFirmwareUpgrade using W2-AACfgFirmwareUpgrade Business Object.</p>
W2-AACfgFirmwareUpgradeDelete	<p>Used to delete an existing Configuration - Firmware - Asset record.</p> <p>This component invokes the Inbound Web Service ATW2AACfgFirmwareUpgrade using W2-AACfgFirmwareUpgrade Business Object.</p>
W2-AACfgFirmwareUpgradeRead	<p>Used to query an existing Configuration - Firmware - Asset to Asset record.</p> <p>This component invokes the Inbound Web Service ATW2AACfgFirmwareUpgrade using W2-AACfgFirmwareUpgrade Business Object.</p>

Component	Description
W2-AACfgFirmwareUpgradeUpdate	<p>Used to update an existing Configuration - Firmware - Asset to Asset record.</p> <p>This component invokes the Inbound Web Service ATW2AACfgFirmwareUpgrade using W2-AACfgFirmwareUpgrade Business Object.</p>
W2-ACACCfgFirmwareUpgradeAdd	<p>Used to create a Configuration - Firmware - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW2ACACCfgFirmwareUpgrade using W2-ACACCfgFirmwareUpgrade Business Object.</p>
W2-ACACCfgFirmwareUpgradeDelete	<p>Used to delete an existing Configuration - Firmware - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW2ACACCfgFirmwareUpgrade using W2-ACACCfgFirmwareUpgrade Business Object.</p>
W2-ACACCfgFirmwareUpgradeRead	<p>Used to query an existing Configuration - Firmware - Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW2ACACCfgFirmwareUpgrade using W2-ACACCfgFirmwareUpgrade Business Object.</p>
W2-ACACCfgFirmwareUpgradeUpdate	<p>Used to update an existing Configuration - Firmware Component to Component record.</p> <p>This component invokes the Inbound Web Service ATW2ACACCfgFirmwareUpgrade using W2-ACACCfgFirmwareUpgrade Business Object.</p>
W2-ACACfgFirmwareUpgradeAdd	<p>Used to create a Configuration - Firmware - Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW2ACACfgFirmwareUpgrade using W2-ACACfgFirmwareUpgrade Business Object.</p>
W2-ACACfgFirmwareUpgradeDelete	<p>Used to delete an existing Configuration - Firmware - Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW2ACACfgFirmwareUpgrade using W2-ACACfgFirmwareUpgrade Business Object.</p>
W2-ACACfgFirmwareUpgradeRead	<p>Used to query an existing Configuration - Firmware Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW2ACACfgFirmwareUpgrade using W2-ACACfgFirmwareUpgrade Business Object.</p>



Component	Description
W2-ACACfgFirmwareUpgradeUpdate	<p>Used to update an existing Configuration - Firmware Component to Asset record.</p> <p>This component invokes the Inbound Web Service ATW2ACACfgFirmwareUpgrade using W2-ACACfgFirmwareUpgrade Business Object.</p>
W2-ACCfgFirmwareUpgradeAdd	<p>Used to create Configuration - Firmware - Component record.</p> <p>This component invokes the Inbound Web Service ATW2ACCfgFirmwareUpgrade using W2-ACCfgFirmwareUpgrade Business Object.</p>
W2-ACCfgFirmwareUpgradeDelete	<p>Used to delete an existing Configuration - Firmware - Component record.</p> <p>This component invokes the Inbound Web Service ATW2ACCfgFirmwareUpgrade using W2-ACCfgFirmwareUpgrade Business Object.</p>
W2-ACCfgFirmwareUpgradeRead	<p>Used to query an existing Configuration - Firmware - Component record.</p> <p>This component invokes the Inbound Web Service ATW2ACCfgFirmwareUpgrade using W2-ACCfgFirmwareUpgrade Business Object.</p>
W2-ACCfgFirmwareUpgradeUpdate	<p>Used to update an existing Configuration - Firmware - Component record.</p> <p>This component invokes the Inbound Web Service ATW2ACCfgFirmwareUpgrade using W2-ACCfgFirmwareUpgrade Business Object.</p>
W2-ACfgFirmwareUpgradeAdd	<p>Used to create a Configuration - Firmware - Asset record.</p> <p>This component invokes the Inbound Web Service ATW2ACfgFirmwareUpgrade using W2-ACfgFirmwareUpgrade Business Object.</p>
W2-ACfgFirmwareUpgradeDelete	<p>Used to delete an existing Configuration - Firmware - Asset record.</p> <p>This component invokes the Inbound Web Service ATW2ACfgFirmwareUpgrade using W2-ACfgFirmwareUpgrade Business Object.</p>
W2-ACfgFirmwareUpgradeRead	<p>Used to query an existing Configuration - Firmware - Asset record.</p> <p>This component invokes the Inbound Web Service ATW2ACfgFirmwareUpgrade using W2-ACfgFirmwareUpgrade Business Object.</p>

Component	Description
W2-ACfgFirmwareUpgradeUpdate	<p>Used to update an existing Configuration - Firmware - Asset record.</p> <p>This component invokes the Inbound Web Service ATW2ACfgFirmwareUpgrade using W2-ACfgFirmwareUpgrade Business Object.</p>
W2-FirmwareCommandLocalAdd	<p>Used to create a Firmware Command Local record.</p> <p>This component invokes the Inbound Web Service ATW2FirmwareCommandLocal using W2-FirmwareCommandLocal Business Object.</p>
W2-FirmwareCommandLocalDelete	<p>Used to delete an existing Firmware Command Local record.</p> <p>This component invokes the Inbound Web Service ATW2FirmwareCommandLocal using W2-FirmwareCommandLocal Business Object.</p>
W2-FirmwareCommandLocalRead	<p>Used to query an existing Firmware Command Local record.</p> <p>This component invokes the Inbound Web Service ATW2FirmwareCommandLocal using W2-FirmwareCommandLocal Business Object.</p>
W2-FirmwareCommandLocalUpdate	<p>Used to update an existing Firmware Command Local record.</p> <p>This component invokes the Inbound Web Service ATW2FirmwareCommandLocal using W2-FirmwareCommandLocal Business Object.</p>
W2-FirmwareCommandOutboundAdd	<p>Used to create a Firmware Command Outbound record.</p> <p>This component invokes the Inbound Web Service ATW2FirmwareCommandOutbound using W2-FirmwareCommandOutbound Business Object.</p>
W2-FirmwareCommandOutbound	<p>Used to delete a Firmware Command Outbound record.</p> <p>This component invokes the Inbound Web Service ATW2FirmwareCommandOutbound using W2-FirmwareCommandOutbound Business Object.</p>
W2-FirmwareCommandOutboundRead	<p>Used to query an existing Firmware Command Outbound record.</p> <p>This component invokes the Inbound Web Service ATW2FirmwareCommandOutbound using W2-FirmwareCommandOutbound Business Object.</p>

Component	Description
W2-FirmwareCommandOutboundUpdate	Used to update an existing Firmware Command Outbound record.  This component invokes the Inbound Web Service ATW2FirmwareCommandOutbound using W2-FirmwareCommandOutbound Business Object.

## Bill Determinants

Component	Description
D2-UsgTranSeeder	Used to perform actions such as ADD, READ, UPDATE, and DELETE a Usage Transaction Seeder.  This component invokes the D2-UsgTranSeeder Business Object using the ATD2UsgTranSeeder Inbound Web Service.
D2-UsageTransaction	Used to perform actions such as ADD, READ, UPDATE, and DELETE a Usage Transaction.  This component invokes the D2-UsageTransaction Business Object using the ATD2UsageTransaction Inbound Web Service.
D2-UsageSubscription	Used to create a Usage Subscription.  This component invokes the D2-UsageSubscription Business Object using the ATD2UsageSubscription Inbound Web Service.
D2-TOUMap	Used to create a TOU Map.  This component invokes the D2-TOUMap Business Object using the ATD2TOUMap Inbound Web Service.
D2-DynamicOption	Used to create a Dynamic Option.  This component invokes the D2-DynamicOption Business Object using the ATD2DynamicOption Inbound Web Service.
D2-DynamicOptionEvent	Used to create a Dynamic Option Event.  This component invokes the D2-DynamicOptionEvent Business Object using the ATD2DynamicOptionEvent Inbound Web Service.
D1-UsageGroup	Used to create a Usage Group  This component invokes the D1-UsageGroup Business Object using the ATD1UsageGroup Inbound Web Service.

Component	Description
D2-GetScalar	<p>Used to create a GetScalar Usage Rule.</p> <p>This component invokes the D2-GetScalar Business Object using the ATD2GetScalar Inbound Web Service.</p>
D1-CalcRollingDemandRule	<p>Used to create a CalcRollingDemandRule.</p> <p>This component invokes the D1-CalcRollingDemandRule using the ATD1CalcRollingDemandRule IWS Inbound Web Service.</p>
D1-CoincidentPeakSPDemandRule	<p>Used to create a CoincidentPeakSPDemandRule.</p> <p>This component invokes the D1-CoincidentPeakSPDemandRule Business Object using the ATD1CoincidentPeakSPDemandRule.</p>
D1-CoincidentPeakOperandLookup	<p>Used to create a CoincidentPeakOperandLookup.</p> <p>This component invokes the D1-CoincidentPeakOperandLookup Business Object using the ATD1CoincidentPeakOperandLookup Inbound Web Service.</p>
D2-GetTOUUsage	<p>Used to create a GetTOUUsage Usage Rule.</p> <p>This component invokes the D2-GetTOUUsage Business Object using the ATD2GetTOUUsage Inbound Web Service.</p>
D2-DynamicOptionType	<p>Describes the creation of Dynamic Option Type.</p> <p>This component invokes the D2-DynamicOptionType Business Object using the ATD2DynamicOptionType Inbound Web Service.</p>
D2-GetIntervalData	<p>Allows the configuration of interval data retrieval during usage transaction processing. The rule records service quantities per service point and measuring component - which means that interval curves for different measuring components.</p> <p>This component invokes the D2-GetIntervalData Business Object using the ATD2GetIntervalData Inbound Web Service.</p>
D2-Math	<p>Allows the configuration of interval data retrieval during usage transaction processing. The rule records service quantities per service point and measuring component - which means that interval curves for different measuring components.</p> <p>This component invokes the D2-Math Business Object using the ATD2Math Inbound Web Service.</p>

Component	Description
D2-UsageSubscriptionType	<p>Allows to create a usage subscription type for creating a usage subscription.</p> <p>This component invokes the D2-UsageSubscriptionType Business Object using the ATD2UsageSubscriptionType Inbound Web Service.</p>
D2-TOUMapType	<p>Describes Time Of Use Map Type.</p> <p>This component invokes the D2-TOUMapType Business Object using the ATD2TOUMapType Inbound Web Service.</p>
D2-HowToCreateUSInformation	<p>Describes how to create the Usage Subscription related information.</p> <p>This component invokes the D2-HowToCreateUSInformation Business Object using the ATD2HowToCreateUSInformation Inbound Web Service.</p>
D2-ApplyMathInt	<p>Describes the structure and rules applicable to Apply Math (Interval Data) usage rule.</p> <p>This component invokes the D2-ApplyMathInt Business Object using the ATD2ApplyMathInt Inbound Web Service.</p>
D1-FactorNumber	<p>Describes the Factor Number.</p> <p>This component invokes the D1-FactorNumber Business Object using the ATD1FactorNumber Inbound Web Service.</p>
D1-FactorProfile	<p>Used to create a FactorProfile Factor Value.</p> <p>This component invokes the D1-FactorProfile Business Object using the ATD1FactorProfile Inbound Web Service.</p>
D1-FactorVEEGroup	<p>Used to create a FactorVEEGroup Factor.</p> <p>This component invokes the D1- FactorVEEGroup Business Object using the ATD1FactorVEEGroup Inbound Web Service.</p>
D2-GetItemCountsConsumption	<p>Used to create a GetItemCountsConsumption Usage Rule.</p> <p>This component invokes the D2-GetItemCountsConsumption Business Object using the ATD2GetItemCountsConsumption Inbound Web Service.</p>

Component	Description
D2-TOUMapTemplate	Used to create a TOU Map Template.  This component invokes the D2-TOUMapTemplate Business Object using the ATD2TOUMapTemplate Inbound Web Service.
D2-ValAgainstTol	Used to create a Validate Against Tolerance usage rule.  This component invokes the D2-ValAgainstTol Business Object using the ATD2ValAgainstTol Inbound Web Service.
D1-FactorValueNumber	Used to create a Factor Value Number.  This component invokes the D1-FactorValueNumber Business Object using the ATD1FactorValueNumber Inbound Web Service.
D1-FactorValueVEEGroup	Describes the Factor Value VEE Group.  This component invokes the D1-FactorValueVEEGroup Business Object using the ATD1FactorValueVEEGroup Inbound Web Service.
D1-FactorValueProfile	Used to create a FactorValueProfile Factor.  This component invokes the D1-FactorValueProfile Business Object using the ATD1FactorValueProfile Inbound Web Service.

## Communication

Component	Description
D1-CutServiceForNonPaymentTypeAdd	Used to create a Cut Service for Non-Payment Type record.  This component invokes the ATD1CutServiceForNonPaymentType Inbound Web Service using D1-CutServiceForNonPaymentType Business Object.
D1-CutServiceForNonPaymentType Delete	Used to delete an existing Cut Service for Non-Payment Type record.  This component invokes the ATD1CutServiceForNonPaymentType Inbound Web Service using D1-CutServiceForNonPaymentType Business Object.

Component	Description
D1-CutServiceForNonPaymentTypeRead	<p>Used to query an existing Cut Service for Non-Payment Type record.</p> <p>This component invokes the ATD1CutServiceForNonPaymentType Inbound Web Service using D1-CutServiceForNonPaymentType Business Object.</p>
D1-CutServiceForNonPaymentTypeUpdate	<p>Used to update an existing Cut Service for Non-Payment Type record.</p> <p>This component invokes the ATD1CutServiceForNonPaymentType Inbound Web Service using D1-CutServiceForNonPaymentType Business Object.</p>
D1-DisableServiceTypeAdd	<p>Used to create a Disable Service Type record.</p> <p>This component invokes the ATD1DisableServiceType IWS using D1-DisableServiceType Business Object.</p>
D1-DisableServiceTypeDelete	<p>Used to delete an existing Disable Service Type record.</p> <p>This component invokes the ATD1DisableServiceType IWS using D1-DisableServiceType Business Object.</p>
D1-DisableServiceTypeRead	<p>Used to query an existing Disable Service Type record.</p> <p>This component invokes the ATD1DisableServiceType IWS using D1-DisableServiceType Business Object.</p>
D1-DisableServiceTypeUpdate	<p>Used to update an existing Disable Service Type record.</p> <p>This component invokes the ATD1DisableServiceType IWS using D1-DisableServiceType Business Object.</p>
D1-EnableServiceTypeAdd	<p>Used to create an Enable Service Type record.</p> <p>This component invokes the ATD1EnableServiceType IWS using D1-EnableServiceType Business Object.</p>
D1-EnableServiceTypeDelete	<p>Used to delete an existing Enable Service Type record.</p> <p>This component invokes the ATD1EnableServiceType IWS using D1-EnableServiceType Business Object.</p>

Component	Description
D1-EnableServiceTypeRead	Used to query an existing Enable Service Type record.  This component invokes the ATD1EnableServiceType IWS using D1-EnableServiceType Business Object.
D1-EnableServiceTypeUpdate	Used to update an existing Enable Service Type record.  This component invokes the ATD1EnableServiceType IWS using D1-EnableServiceType Business Object.
D1-FieldActivityTypeAdd	Used to create a Field Activity Type record.  This component invokes the ATD1FieldActivityType Inbound Web Service using D1-FieldActivityType Business Object.
D1-FieldActivityTypeDelete	Used to delete an existing Field Activity Type record.  This component invokes the ATD1FieldActivityType Inbound Web Service using D1-FieldActivityType Business Object.
D1-FieldActivityTypeRead	Used to query an existing Field Activity Type record.  This component invokes the ATD1FieldActivityType Inbound Web Service using D1-FieldActivityType Business Object.
D1-FieldActivityTypeUpdate	Used to update an existing Field Activity Type record.  This component invokes the ATD1FieldActivityType Inbound Web Service using D1-FieldActivityType Business Object.
C1-PremiseTypeAdd	Used to create a Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO business object.
C1-PremiseTypeDelete	Used to delete an existing Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO business object.
C1-PremiseTypeRead	Used to query an existing Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO business object.



Component	Description
C1-PremiseTypeUpdate	Used to update an existing Premise Type record.  This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO business object.
W1-AssetLocationTypeAdd	Used to create an Asset Location Type record.  This component invokes the ATW1AssetLocationType Inbound Web Service using the W1-AssetLocationType business object.
W1-AssetLocationTypeDelete	Used to delete an existing Asset Location Type record.  This component invokes the ATW1AssetLocationType Inbound Web Service using the W1-AssetLocationType business object.
W1-AssetLocationTypeRead	Used to query an existing Asset Location Type record.  This component invokes the ATW1AssetLocationType Inbound Web Service using the W1-AssetLocationType business object.
W1-AssetLocationTypeUpdate	Used to update an existing Asset Location Type record.  This component invokes the ATW1AssetLocationType Inbound Web Service using W1-AssetLocationType business object.
W1-AssetTypeAdd	Used to create an Asset Type record.  This component invokes the ATW1AssetType Inbound Web Service using the W1-AssetType business object.
W1-AssetTypeDelete	Used to delete an existing Asset Type record.  This component invokes the ATW1AssetType Inbound Web Service using the W1-AssetType business object.
W1-AssetTypeRead	Used to query an existing Asset Type record.  This component invokes the ATW1AssetType Inbound Web Service using the W1-AssetType business object.
W1-AssetTypeUpdate	Used to update an existing Asset Type record.  This component invokes the ATW1AssetType Inbound Web Service using W1-AssetType business object.

Component	Description
W1-ContactTypeRead	Used to query an existing Contact Type record.  This component invokes the ATW1ContactType Inbound Web Service using the W1-ContactType business object.
W1-ComponentTypeAdd	Used to create an Operational Device Component Type record.  This component invokes the ATW1ComponentType Inbound Web Service using the W1-ComponentType business object.
W1-ComponentTypeDelete	Used to delete an existing Operational Device Component Type record.  This component invokes the ATW1ComponentType Inbound Web Service using the W1-ComponentType business object.
W1-ComponentTypeRead	Used to query an existing Operational Device Component Type record.  This component invokes the ATW1ComponentType Inbound Web Service using the W1-ComponentType business object.
W1-ComponentTypeUpdate	Used to update an existing Operational Device Component Type record.  This component invokes the ATW1ComponentType Inbound Web Service using W1-ComponentType business object.
W1-OrganizationAdd	Used to create an Organization record.  This component invokes the ATW1Organization Inbound Web Service using the W1-Organization business object.
W1-OrganizationDelete	Used to delete an existing Organization record.  This component invokes the ATW1Organization Inbound Web Service using the W1-Organization business object.
W1-OrganizationRead	Used to query an existing Organization record.  This component invokes the ATW1Organization Inbound Web Service using the W1-Organization business object.
W1-OrganizationUpdate	Used to update an existing Organization record.  This component invokes the ATW1Organization Inbound Web Service using W1-Organization business object.

Component	Description
W1-OrganizationTypeAdd	<p>Used to create an Organization Type record.</p> <p>This component invokes the ATW1OrganizationType Inbound Web Service using the W1-OrganizationType business object.</p>
W1-OrganizationTypeDelete	<p>Used to delete an existing Organization Type record.</p> <p>This component invokes the ATW1OrganizationType Inbound Web Service using the W1-OrganizationType business object.</p>
W1-OrganizationTypeRead	<p>Used to query an existing Organization Type record.</p> <p>This component invokes the ATW1OrganizationType Inbound Web Service using the W1-OrganizationType business object.</p>
W1-OrganizationTypeUpdate	<p>Used to update an existing Organization Type record.</p> <p>This component invokes the ATW1OrganizationType Inbound Web Service using W1-OrganizationType business object.</p>
W1-ServiceHistoryAdd	<p>Used to create an Operational Device Service History record.</p> <p>This component invokes the ATW1ServiceHistory Inbound Web Service using the W1-ServiceHistory business object.</p>
W1-ServiceHistoryDelete	<p>Used to delete an existing Operational Device Service History record.</p> <p>This component invokes the ATW1ServiceHistory Inbound Web Service using the W1-ServiceHistory business object.</p>
W1-ServiceHistoryRead	<p>Used to query an existing Operational Device Service History record.</p> <p>This component invokes the ATW1ServiceHistory Inbound Web Service using the W1-ServiceHistory business object.</p>
W1-ServiceHistoryUpdate	<p>Used to update an existing Operational Device Service History record.</p> <p>This component invokes the ATW1ServiceHistory Inbound Web Service using W1-ServiceHistory business object.</p>

Component	Description
W1-StorageLocationAdd	<p>Used to create an Out of Service Location record.</p> <p>This component invokes the ATW1StorageLocation Inbound Web Service using the W1-StorageLocation business object.</p>
W1-StorageLocationDelete	<p>Used to delete an existing Out of Service Location record.</p> <p>This component invokes the ATW1StorageLocation Inbound Web Service using the W1-StorageLocation business object.</p>
W1-StorageLocationRead	<p>Used to query an existing Out of Service Location record.</p> <p>This component invokes the ATW1StorageLocation Inbound Web Service using the W1-StorageLocation business object.</p>
W1-StorageLocationUpdate	<p>Used to update an existing Out of Service Location record.</p> <p>This component invokes the ATW1StorageLocation Inbound Web Service using W1-StorageLocation business object.</p>
W1-StorageLocationTypeAdd	<p>Used to create an Out of Service Location Type record.</p> <p>This component invokes the ATW1StorageLocationType Inbound Web Service using the W1-StorageLocationType business object.</p>
W1-StorageLocationTypeDelete	<p>Used to delete an existing Out of Service Location Type record.</p> <p>This component invokes the ATW1StorageLocationType Inbound Web Service using the W1-StorageLocationType business object.</p>
W1-StorageLocationTypeRead	<p>Used to query an existing Out of Service Location Type record.</p> <p>This component invokes the ATW1StorageLocationType Inbound Web Service using the W1-StorageLocationType business object.</p>
W1-StorageLocationTypeUpdate	<p>Used to update an existing Out of Service Location Type record.</p> <p>This component invokes the ATW1StorageLocationType Inbound Web Service using W1-StorageLocationType business object.</p>

Component	Description
W2-ServicePointRead	Used to query an existing Service Point record.  This component invokes the ATW2ServicePoint Inbound Web Service using the W2-ServicePoint business object.
W2-VehicleAdd	Used to create a Vehicle record.  This component invokes the ATW2Vehicle Inbound Web Service using the W2-Vehicle business object.
W1-VehicleDelete	Used to delete an existing Vehicle record.  This component invokes the ATW2Vehicle Inbound Web Service using the W2-Vehicle business object.
W1-VehicleRead	Used to query an existing Vehicle record.  This component invokes the ATW2Vehicle Inbound Web Service using the W2-Vehicle business object.
W1-VehicleUpdate	Used to update an existing Vehicle record.  This component invokes the ATW2Vehicle Inbound Web Service using W2-Vehicle business object.
X1-AssetLocationTypeAdd	Used to create a Service Point Type - ODM record.  This component invokes the ATX1AssetLocationType Inbound Web Service using the X1-AssetLocationType business object.
X1-AssetLocationTypeDelete	Used to delete an existing Service Point Type - ODM record.  This component invokes the ATX1AssetLocationType Inbound Web Service using the X1-AssetLocationType business object.
X1-AssetLocationTypeRead	Used to query an existing Service Point Type - ODM record.  This component invokes the ATX1AssetLocationType Inbound Web Service using the X1-AssetLocationType business object.
X1-AssetLocationTypeUpdate	Used to update an existing Service Point Type - ODM record.  This component invokes the ATX1AssetLocationType Inbound Web Service using X1-AssetLocationType business object.

Component	Description
X1-ServicePointTypeAdd	Used to create a Service Point Type - CCB record.  This component invokes the ATX1ServicePointType Inbound Web Service using X1-ServicePointType Business Object.
X1-ServicePointTypeDelete	Used to delete an existing Service Point Type - CCB record.  This component invokes the ATX1ServicePointType Inbound Web Service using X1-ServicePointType BO.
X1-ServicePointTypeRead	Used to query an existing Service Point Type - CCB record.  This component invokes the ATX1ServicePointType Inbound Web Service using X1-ServicePointType BO.
X1-ServicePointTypeUpdate	Used to update an existing Service Point Type - CCB record.  This component invokes the ATX1ServicePointType Inbound Web Service using X1-ServicePointType BO.
X1-ServiceTypeAdd	Used to create a Service Type - CCB record.  This component invokes the ATX1ServiceType Inbound Web Service using X1-ServiceType BO.
X1-ServiceTypeDelete	Used to delete an existing Service Type - CCB record.  This component invokes the ATX1ServiceType Inbound Web Service using X1-ServiceType BO.
X1-ServiceTypeRead	Used to query an existing Service Type - CCB record.  This component invokes the ATX1ServiceType Inbound Web Service using X1-ServiceType BO.
X1-ServiceTypeUpdate	Used to update an existing Service Type - CCB record.  This component invokes the ATX1ServiceType Inbound Web Service using X1-ServiceType BO.
X1D-ServicePointTypeAdd	Used to create a Service Point Type - MDM record.  This component invokes the ATXD1ServicePointType Inbound Web Service using X1D-ServicePointType BO.

Component	Description
X1D-ServicePointTypeDelete	<p>Used to delete an existing Service Point Type - MDM record.</p> <p>This component invokes the ATXD1ServicePointType Inbound Web Service using X1D-ServicePointType BO.</p>
X1D-ServicePointTypeRead	<p>Used to query an existing Service Point Type - MDM record.</p> <p>This component invokes the ATXD1ServicePointType Inbound Web Service using X1D-ServicePointType BO.</p>
X1D-ServicePointTypeUpdate	<p>Used to update an existing Service Point Type - MDM record.</p> <p>This component invokes the ATXD1ServicePointType Inbound Web Service using X1D-ServicePointType BO.</p>
D1-DeviceEventComRespTypeAdd	<p>Used to create a Device Event Communication Response Type record.</p> <p>This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.</p>
D1-DeviceEventComRespTypeDel	<p>Used to delete an existing Device Event Communication Response Type record.</p> <p>This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.</p>
D1-DeviceEventComRespTypeRead	<p>Used to query an existing Device Event Communication Response Type record.</p> <p>This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.</p>
D1-DeviceEventComRespTypeUpd	<p>Used to update an existing Device Event Communication Response Type record.</p> <p>This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.</p>
W1-AssetCompCfgRptAdd	<p>Used to create a Component Config Report record.</p> <p>This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Service of ATW1AssetCompCfgRpt.</p>

Component	Description
W1-AssetCompCfgRptDelete	<p>Used to delete an existing Component Config Report record.</p> <p>This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Service of ATW1AssetCompCfgRpt.</p>
W1-AssetCompCfgRptRead	<p>Used to query an existing Component Config Report record.</p> <p>This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Service of ATW1AssetCompCfgRpt.</p>
W1-AssetCompCfgRptUpdate	<p>Used to update an existing Component Config Report record.</p> <p>This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Service of ATW1AssetCompCfgRpt.</p>
W1-AssetCompConfigAdd	<p>Used to create an Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetCompConfig Inbound Web Service using W1-AssetCompConfig BO.</p>
W1-AssetCompConfigDelete	<p>Used to delete an Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetCompConfig Inbound Web Service using W1-AssetCompConfig BO.</p>
W1-AssetCompConfigRead	<p>Used to query an Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetCompConfig Inbound Web Service using W1-AssetCompConfig BO.</p>
W1-AssetCompConfigUpdate	<p>Used to query an Asset Component Config Report record.</p> <p>This component invokes the ATW1AssetCompConfig Inbound Web Service using W1-AssetCompConfig BO.</p>
W1-AssetCompToAssetCompCfgRptAdd	<p>Used to create an Asset Component to Asset Component Config Report record.</p> <p>This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt Inbound Web Service using W1-AssetCompToAssetCompCfgRpt BO.</p>



Component	Description
W1-AssetCompToAssetCompCfgRpt Delete	<p>Used to update an existing Asset Component to Asset Component Config Report record.</p> <p>This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt Inbound Web Service using W1-AssetCompToAssetCompCfgRpt BO.</p>
W1-AssetCompToAssetCompCfgRptRead	<p>Used to update an query Asset Component to Asset Component Config Report record.</p> <p>This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt Inbound Web Service using W1-AssetCompToAssetCompCfgRpt BO.</p>
W1-AssetCompToAssetCompCfgRpt Update	<p>Used to delete an query Asset Component to Asset Component Config Report record.</p> <p>This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt Inbound Web Service using W1-AssetCompToAssetCompCfgRpt BO.</p>
W1-AssetCompToAssetConfigAdd	<p>Used to create an Asset Component to Asset Config record.</p> <p>This component invokes the ATW1AssetCompToAssetConfig Inbound Web Service using W1-AssetCompToAssetConfig BO.</p>
W1-AssetCompToAssetConfigDelete	<p>Used to delete an existing Asset Component to Asset Config record.</p> <p>This component invokes the ATW1AssetCompToAssetConfig Inbound Web Service using W1-AssetCompToAssetConfig BO.</p>
W1-AssetCompToAssetConfigRead	<p>Used to update an existing Asset Component to Asset Config record.</p> <p>This component invokes the ATW1AssetCompToAssetConfig Inbound Web Service using W1-AssetCompToAssetConfig BO.</p>
W1-AssetCompToAssetConfigUpdate	<p>Used to update an existing Asset Component to Asset Component Config record.</p> <p>This component invokes the ATW1AssetCompToAssetConfig Inbound Web Service using W1-AssetCompToAssetConfig BO.</p>

Component	Description
W1-AssetToAssetCompCfgRptAdd	Used to create an Asset to Asset Component Config Report record.  This component invokes the ATW1AssetToAssetCompCfgRpt Inbound Web Service using W1-AssetToAssetCompCfgRpt BO.
W1-AssetToAssetCompCfgRptDelete	Used to delete an existing Asset to Asset Component Config Report record.  This component invokes the ATW1AssetToAssetCompCfgRpt Inbound Web Service using W1-AssetToAssetCompCfgRpt BO.
W1-AssetToAssetCompCfgRptRead	Used to query an existing Asset to Asset Component Config Report record.  This component invokes the ATW1AssetToAssetCompCfgRpt Inbound Web Service using W1-AssetToAssetCompCfgRpt BO.
W1-AssetToAssetCompCfgRptUpdate	Used to update an existing Asset to Asset Component Config Report record.  This component invokes the ATW1AssetToAssetCompCfgRpt Inbound Web Service using W1-AssetToAssetCompCfgRpt BO.
W1-AssetToAssetConfigAdd	Used to create an Asset to Asset record.  This component invokes the ATD8StatusChangedType Inbound Web Service using D8-ReadOnDemandReadResultType BO.
W1-AssetToAssetConfigDelete	Used to delete an existing Asset to Asset record.  This component invokes the ATD8ReadOnDemandReadResultType Inbound Web Service using D8-StatusChangedType BO.
W1-AssetToAssetConfigUpdate	Used to update an existing Asset to Asset record.  This component invokes the ATD8StatusChangedType Inbound Web Service using D8-StatusChangedType BO.
W1-ConfigTypeAdd	Used to create a Config Type record.  This component invokes the ATW1ConfigType Inbound Web Service using W1-ConfigType BO.
W1-ConfigTypeDelete	Used to delete an existing Config Type record.  This component invokes the ATW1ConfigType Inbound Web Service using W1-ConfigType BO.

Component	Description
W1-ConfigTypeRead	Used to query an existing Config Type record.  This component invokes the ATW1ConfigType Inbound Web Service using W1-ConfigType BO.
W1-ConfigTypeUpdate	Used to update an existing Config Type record.  This component invokes the ATW1ConfigType Inbound Web Service using W1-ConfigType BO.
W1-SingleAssetCfgRptAdd	Used to create a Single Asset Config Report record.  This component invokes the ATW1SingleAssetCfgRp Inbound Web Service using W1-SingleAssetCfgRp BO.
W1-SingleAssetCfgRptDelete	Used to delete an existing Single Asset Config Report record.  This component invokes the ATW1SingleAssetCfgRp Inbound Web Service using W1-SingleAssetCfgRp BO.
W1-SingleAssetCfgRptRead	Used to query an existing Single Asset Config Report record.  This component invokes the ATW1SingleAssetCfgRp Inbound Web Service using W1-SingleAssetCfgRp BO.
W1-SingleAssetCfgRptUdpate	Used to update an existing Single Asset Config Report record.  This component invokes the ATW1SingleAssetCfgRp Inbound Web Service using W1-SingleAssetCfgRp BO.
W1-SingleAssetConfigAdd	Used to create a Single Asset Config record.  This component invokes the ATW1SingleAssetConfig Inbound Web Service using W1-SingleAssetConfig BO.
W1-SingleAssetConfigDelete	Used to delete an existing Single Asset Config record.  This component invokes the ATW1SingleAssetConfig Inbound Web Service using W1-SingleAssetConfig BO.
W1-ActivityCompletionEventTypeAdd	Used to create an Activity Completion Event Type record.  This component invokes the ATW1ActivityCompletionEventType Inbound Web Service using W1-ActivityCompletionEventType Business Object.

Component	Description
W1-ActivityCompletionEventTypeDelete	<p>Used to delete an existing Activity Completion Event Type record.</p> <p>This component invokes the ATW1ActivityCompletionEventType Inbound Web Service using W1-ActivityCompletionEventType Business Object.</p>
W1-ActivityCompletionEventTypeRead	<p>Used to query an existing Activity Completion Event Type record.</p> <p>This component invokes the ATW1ActivityCompletionEventType Inbound Web Service using W1-ActivityCompletionEventType Business Object.</p>
W1-ActivityCompletionEventTypeUpdate	<p>Used to update an existing Activity Completion Event Type record.</p> <p>This component invokes the ATW1ActivityCompletionEventType Inbound Web Service using W1-ActivityCompletionEventType Business Object.</p>
W1-AssetDposCmpEvtTypeAdd	<p>Used to create an Asset Disposition Completion Event Type record.</p> <p>This component invokes the ATW1AssetDposCmpEvtType Inbound Web Service using W1-AssetDposCmpEvtType Business Object.</p>
W1-AssetDposCmpEvtTypeDelete	<p>Used to delete an existing Asset Disposition Completion Event Type record.</p> <p>This component invokes the ATW1AssetDposCmpEvtType Inbound Web Service using W1-AssetDposCmpEvtType Business Object.</p>
W1-AssetDposCmpEvtTypeRead	<p>Used to query an existing Asset Disposition Completion Event Type record.</p> <p>This component invokes the ATW1AssetDposCmpEvtType Inbound Web Service using W1-AssetDposCmpEvtType Business Object.</p>
W1-AssetDposCmpEvtTypeUpdate	<p>Used to update an existing Asset Disposition Completion Event Type record.</p> <p>This component invokes the ATW1AssetDposCmpEvtType Inbound Web Service using W1-AssetDposCmpEvtType Business Object.</p>

Component	Description
W1-BasicActivityTypeAdd	Used to create a Basic Activity Type record.  This component invokes the ATW1BasicActivityType Inbound Web Service using W1-BasicActivityType Business Object.
W1-BasicActivityTypeDel	Used to delete an existing Basic Activity Type record.  This component invokes the ATW1BasicActivityTypeInbound Web Service using W1-BasicActivityType Business Object.
W1-BasicActivityTypeRead	Used to query an existing Basic Activity Type record.  This component invokes the ATW1BasicActivityType Inbound Web Service using W1-BasicActivityType Business Object.
W1-BasicActivityTypeUpdate	Used to update an existing Basic Activity Type record.  This component invokes the ATW1BasicActivityType Inbound Web Service using W1-BasicActivityType Business Object.
W1-DataAreaCmpEvtTypeAdd	Used to create Data Area Completion Event Type record.  This component invokes the ATW1DataAreaCmpEvtType Inbound Web Service using W1-DataAreaCmpEvtType Business Object.
W1-DataAreaCmpEvtTypeDelete	Used to delete an existing Data Area Completion Event Type record.  This component invokes the ATW1DataAreaCmpEvtType Inbound Web Service using W1-DataAreaCmpEvtType Business Object.
W1-DataAreaCmpEvtTypeRead	Used to query an existing Data Area Completion Event Type record.  This component invokes the ATW1DataAreaCmpEvtType Inbound Web Service using W1-DataAreaCmpEvtType Business Object.
W1-DataAreaCmpEvtTypeUpdate	Used to update an existing Data Area Completion Event Type record.  This component invokes the ATW1DataAreaCmpEvtType Inbound Web Service using W1-DataAreaCmpEvtType Business Object.

Component	Description
W1-GeneralCommunicationAdd	<p>Used to create a General Inbound Communication Type record.</p> <p>This component invokes the ATW1GeneralCommunicationType Inbound Web Service using W1-GeneralCommunicationTypeBusiness Object.</p>
W1-GeneralCommunicationDelete	<p>Used to delete an existing General Inbound Communication Type record.</p> <p>This component invokes the ATW1GeneralCommunicationType Inbound Web Service using W1-GeneralCommunicationType Business Object.</p>
W1-GeneralCommunicationRead	<p>Used to query an existing General Inbound Communication Type record.</p> <p>This component invokes the ATW1GeneralCommunicationType Inbound Web Service using W1-GeneralCommunicationType Business Object.</p>
W1-GeneralCommunicationUpdate	<p>Used to update an existing General Inbound Communication Type record.</p> <p>This component invokes the ATW1GeneralCommunicationType Inbound Web Service using W1-GeneralCommunicationType Business Object.</p>
W1-GeneralCompletionEventTypeAdd	<p>Used to create General Completion Event Type record.</p> <p>This component invokes the ATW1GeneralCompletionEventType Inbound Web Service using W1-GeneralCompletionEventType Business Object.</p>
W1-GeneralCompletionEventTypeDelete	<p>Used to delete an existing General Completion Event Type record.</p> <p>This component invokes the ATW1GeneralCompletionEventType Inbound Web Service using W1-GeneralCompletionEventType Business Object.</p>
W1-GeneralCompletionEventTypeRead	<p>Used to query an existing General Completion Event Type record.</p> <p>This component invokes the ATW1GeneralCompletionEventType Inbound Web Service using W1-GeneralCompletionEventType Business Object.</p>

Component	Description
W1- GeneralCompletionEventTypeUpdate	Used to update an existing General Completion Event Type record.  This component invokes the ATW1GeneralCompletionEventType Inbound Web Service using W1-GeneralCompletionEventType Business Object.
W1-ManufacturerAdd	Used to create a Manufacturer record.  This component invokes the ATW1Manufacturer Inbound Web Service using W1-Manufacturer Business Object.
W1-ManufacturerDelete	Used to delete an existing Manufacturer record.  This component invokes the ATW1Manufacturer Inbound Web Service using W1-Manufacturer Business Object.
W1-ManufacturerRead	Used to query an existing Manufacturer record.  This component invokes the ATW1Manufacturer Inbound Web Service using W1-Manufacturer Business Object.
W1-ManufacturerUpdate	Used to update an existing Manufacturer record.  This component invokes the ATW1Manufacturer Inbound Web Service using W1-Manufacturer Business Object.
W1-OutboundActivityTypeAdd	Used to create an Outbound Activity Type record.  This component invokes the ATW1OutboundActivityType Inbound Web Service using W1-OutboundActivityType Business Object.
W1-OutboundActivityTypeDelete	Used to delete an existing Outbound Activity Type record.  This component invokes the ATW1OutboundActivityType Inbound Web Service using W1-OutboundActivityType Business Object.
W1-OutboundActivityTypeRead	Used to query an existing Outbound Activity Type record.  This component invokes the ATW1OutboundActivityType Inbound Web Service using W1-OutboundActivityType Business Object.

Component	Description
W1-OutboundActivityTypeUpdate	<p>Used to update an existing Outbound Activity Type record.</p> <p>This component invokes the ATW1OutboundActivityType Inbound Web Service using W1-OutboundActivityType Business Object.</p>
W1-ReplicationComplEventTypeAdd	<p>Used to create a Replication Completion Event Type record.</p> <p>This component invokes the ATW1ReplicationComplEventType Inbound Web Service using W1-ReplicationComplEventType Business Object.</p>
W1-ReplicationComplEventTypeDelete	<p>Used to delete an existing Replication Completion Event Type record.</p> <p>This component invokes the ATW1ReplicationComplEventType Inbound Web Service using W1-ReplicationComplEventType Business Object.</p>
W1-ReplicationComplEventTypeRead	<p>Used to query an existing Replication Completion Event Type record.</p> <p>This component invokes the ATW1ReplicationComplEventType Inbound Web Service using W1-ReplicationComplEventType Business Object.</p>
W1-ReplicationComplEventTypeUpdate	<p>Used to update an existing Replication Completion Event Type record.</p> <p>This component invokes the ATW1ReplicationComplEventType Inbound Web Service using W1-ReplicationComplEventType Business Object.</p>
W1-ScheduledActivityTypeAdd	<p>Used to create a Scheduled Activity Type record.</p> <p>This component invokes the ATW1ScheduledActivityType Inbound Web Service using W1-ScheduledActivityType Business Object.</p>
W1-ScheduledActivityTypeDelete	<p>Used to delete an existing Scheduled Activity Type record.</p> <p>This component invokes the ATW1ScheduledActivityType Inbound Web Service using W1-ScheduledActivityType Business Object.</p>



Component	Description
W1-ScheduledActivityTypeRead	<p>Used to query an existing Scheduled Activity Type record.</p> <p>This component invokes the ATW1ScheduledActivityType Inbound Web Service W1-ScheduledActivityType Business Object.</p>
W1-ScheduledActivityTypeUpdate	<p>Used to update an existing Scheduled Activity Type record.</p> <p>This component invokes the ATW1ScheduledActivityType Inbound Web Service using W1-ScheduledActivityType Business Object.</p>
W1-ServiceHistTypeCmpEvtTypeAdd	<p>Used to create a Service History Completion Event Type record.</p> <p>This component invokes the ATW1ServiceHistTypeCmpEvtTypeInbound Web Service using W1-ServiceHistTypeCmpEvtType Business Object.</p>
W1-ServiceHistTypeCmpEvtTypeDelete	<p>Used to delete an existing Service History Completion Event Type record.</p> <p>This component invokes the ATW1ServiceHistTypeCmpEvtTypeInbound Web Service W1-ServiceHistTypeCmpEvtType Business Object.</p>
W1-ServiceHistTypeCmpEvtTypeRead	<p>Used to query an existing Service History Completion Event Type record.</p> <p>This component invokes the ATW1ServiceHistTypeCmpEvtTypeInbound Web Service W1-ServiceHistTypeCmpEvtType Business Object.</p>
W1-ServiceHistTypeCmpEvtTypeUpdate	<p>Used to update an existing Service History Completion Event Type record.</p> <p>This component invokes the ATW1ServiceHistTypeCmpEvtType Inbound Web Service using W1-ServiceHistTypeCmpEvtType Business Object.</p>
W1-SvcHistFromActvCmplEvtTypeAdd	<p>Used to create a Service History From Activity Completion Event Type record.</p> <p>This component invokes the ATW1SvcHistFromActvCmplEvtType Inbound Web Service W1-SvcHistFromActvCmplEvtType Business Object.</p>

Component	Description
W1-SvcHistFromActvCmplEvtTypeDelete	<p>Used to delete an existing Service History From Activity Completion Event Type record.</p> <p>This component invokes the ATW1SvcHistFromActvCmplEvtType Inbound Web Service W1-SvcHistFromActvCmplEvtType Business Object.</p>
W1-SvcHistFromActvCmplEvtTypeRead	<p>Used to query an existing Service History From Activity Completion Event Type record.</p> <p>This component invokes the ATW1SvcHistFromActvCmplEvtType Inbound Web Service W1-SvcHistFromActvCmplEvtType Business Object.</p>
W1-SvcHistFromActvCmplEvtTypeUpdate	<p>Used to update an existing Service History From Activity Completion Event Type record.</p> <p>This component invokes the ATW1SvcHistFromActvCmplEvtType Inbound Web Service W1-SvcHistFromActvCmplEvtType Business Object.</p>
W1-SOMActivityTypeRead	<p>Used to query a SOM Activity Type record.</p> <p>This component invokes the ATW1SOMActivityType Inbound Web Service using W1-SOMActivityType Business Object.</p>
D2-SubIntAdjustmentVEE	<p>Performs adjustments to consumption; the changes to consumption will be validated against the readings contained prior to and subsequent to the change made.</p> <p>This component invokes the D2-SubIntAdjustmentVEE Business Object using the ATD2SubIntAdjustmentVEE Inbound Web Service.</p>
D2-GetSubtractiveInterval	<p>Allows the configuration of subtractive interval data retrieval during usage transaction processing. The rule records service quantities per service point and measuring component - which means that subtractive interval curves for different measuring components.</p> <p>This component invokes the D2-GetSubtractiveInterval Business Object using the ATD2GetSubtractiveInterval Inbound Web Service.</p>

Component	Description
D1-MeterReadDownloadActType	<p>Used to create a MeterReadDownloadActType Activity Type.</p> <p>This component invokes the D1-MeterReadDownloadActType Business Object using the ATD1MeterReadDownloadActType Inbound Web Service.</p>
D1-PairedEventLastDvcEvtType	<p>Used to create a PairedEventLastDvcEvtType Device Event Type.</p> <p>This component invokes the D1-PairedEventLastDvcEvtType Business Object using the ATD1PairedEventLastDvcEvtType Inbound Web Service.</p>
D1-StandardDeviceEventType	<p>Used to create a StandardDeviceEventType Device Event Type.</p> <p>This component invokes the D1-StandardDeviceEventType Business Object using the ATD1StandardDeviceEventType Inbound Web Service.</p>
D1-UTCorrectnPrcessrActvtyType	<p>Defines the activity BO to use in the creation of a Usage Transaction Correction Processor. This component also defines the general category of these activities as a Correction Processor.</p> <p>The component invokes the D1-UTCorrectnPrcessrActvtyType Business Object using the ATD1UTCorrectnPrcessrActvtyType Inbound Web Service.</p>
D1-RemoteConnectType	<p>Describes configuration parameters required for the Remote Connect command activity, including automated retry and command time-out options.</p> <p>This component allows the definition of a Service Issue Monitor Type resulting in the creation of a Service Issue Monitor of the configured type if a Remote Connect command activity has failed.</p> <p>The component invokes the D1-RemoteConnectType Business Object using the ATD1RemoteConnectType Inbound Web Service.</p>
D1-PairedEventFirstDvcEvtType	<p>Describes the Device Event Type - Paired Event (First).</p> <p>This component invokes the D1-PairedEventFirstDvcEvtType Business Object using the ATD1PairedEventFirstDvcEvtType Inbound Web Service.</p>

Component	Description
D1-DeviceWithDurationActType	<p>Describes the Device Activity with Duration Type.</p> <p>This component invokes the D1-DeviceWithDurationActType Business Object using the ATD1DeviceWithDurationActType Inbound Web Service.</p>
D2-SubMeasurementAggType	<p>Describes the Sub Measurement Aggregator Type.</p> <p>This component invokes the D2-SubMeasurementAggType Business Object using the ATD2SubMeasurementAggType Inbound Web Service.</p>
D2-MasterMsrmAggregatorType	<p>Describes the Master Measurement Aggregator Type.</p> <p>This component invokes the D2-MasterMsrmAggregatorType Business Object using the ATD2MasterMsrmAggregatorType Inbound Web Service.</p>
D2-ActivityTypeAggDimScanner	<p>Describes the Aggregator Dimension Scanner Activity Type.</p> <p>This component invokes the D2-ActivityTypeAggDimScanner Business Object using the ATD2ActivityTypeAggDimScanner Inbound Web Service.</p>
D2-AggregatorType	<p>Used to create an AggregatorType Measuring Component Type.</p> <p>This component invokes the D2-AggregatorType Business Object using the ATD2AggregatorType Inbound Web Service.</p>
D1-IntervalPriceType	<p>Used to create a IntervalPriceType.</p> <p>This component invokes the D1-IntervalPriceType Business Object using the ATD1IntervalPriceType Inbound Web Service.</p>
D1-IntervalChannelTypePhysical	<p>Used to create a IntervalChannelTypePhysical.</p> <p>This component invokes the D1-IntervalChannelTypePhysical Business Object using the ATD1IntervalChannelTypePhysical Inbound Web Service.</p>
D1-MeasurementCycleSchedule	<p>Used to create a MeasurementCycleSchedule.</p> <p>This component invokes the D1-MeasurementCycleSchedule Business Object using the ATD1MeasurementCycleSchedule Inbound Web Service.</p>

Component	Description
D1-ReaderRemarkType	Used to create a ReaderRemarkType.  This component invokes the D1-ReaderRemarkType Business Object using the ATD1ReaderRemarkType Inbound Web Service.
D1-ServiceIssueMonitorType	Used to create a ServiceIssueMonitorType.  This component invokes the D1-ServiceIssueMonitorType Business Object using the ATD1ServiceIssueMonitorType Inbound Web Service.
D2-MsrmtQuantityAggScannerType	Used to create a MsrmtQuantityAggScannerType.  This component invokes the D2-MsrmtQuantityAggScannerType Business Object using the ATD2MsrmtQuantityAggScannerType Inbound Web Service.
D2-TOUGroup	Used to create a TOUGroup.  This component invokes the D2-TOUGroup Business Object using the ATD2TOUGroup Inbound Web Service.
D2-VEERuleHighLowCheck	Used to create a VEERuleHighLowCheck.  This component invokes the D2-VEERuleHighLowCheck Business Object using the ATD2VEERuleHighLowCheck Inbound Web Service.
D1-HowToCreateMCInformation	Used to create a HowToCreateMCInformation.  This component invokes the D1-HowToCreateMCInformation Business Object using the ATD1HowToCreateMCInformation Inbound Web Service.
D1-HowToSendActivityResponse	Used to create a HowToSendActivityResponse.  This component invokes the D1-HowToSendActivityResponse Business Object using the ATD1HowToSendActivityResponse Inbound Web Service.
D1-AvgDailyEstItemConsumption	Used to create a AvgDailyEstItemConsumption.  This component invokes the D1-AvgDailyEstItemConsumption Business Object using the ATD1AvgDailyEstItemConsumption Inbound Web Service.

Component	Description
D1-VEEEligibilityCriteria	Used to create a VEEEligibilityCriteria.  This component invokes the D1-VEEEligibilityCriteria Business Object using the ATD1VEEEligibilityCriteria Inbound Web Service.
D2-VerifyUomTouSqimCEexistForUs	Used to create a VerifyUomTouSqimCEexistForUs.  This component invokes the D2-VerifyUomTouSqimCEexistForUs Business Object using the ATD2VerifyUomTouSqimCEexistForUs Inbound Web Service.
D1-DeviceEventSeeder	Used to create a DeviceEventSeeder.  This component invokes the D1-DeviceEventSeeder Business Object using the ATD1DeviceEventSeeder Inbound Web Service.
D1-FieldActivity	Used to create a FieldActivity.  This component invokes the D1-FieldActivity Business Object using the ATD1FieldActivity Inbound Web Service.
D1-ReaderRemark	Used to create a ReaderRemark.  This component invokes the D1-ReaderRemark Business Object using the ATD1ReaderRemark Inbound Web Service.
D1-TimeZoneTranslationLookup	Used to create a TimeZoneTranslationLookup.  This component invokes the D1-ATD1TimeZoneTranslationLookup Business Object using the ATD1ReaderRemark Inbound Web Service.
D2-UsageCalculationGroupLookup	Used to create a UsageCalculationGroupLookup.  This component invokes the D2-UsageCalculationGroupLookup Business Object using the ATD2UsageCalculationGroupLookup Inbound Web Service.
D2-MDMMasterConfig	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig.  This component invokes the D2-MDMMasterConfig Business Object using the ATD2MDMMasterConfig Inbound Web Service.

Component	Description
D2-MDMMasterConfig	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig.</p> <p>This component invokes the D2-MDMMasterConfig Business Object using the ATD2MDMMasterConfig Inbound Web Service.</p>
D2-MtrCommTrckngAggregatorType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a MtrCommTrckngAggregatorType.</p> <p>This component invokes the D2-MtrCommTrckngAggregatorType Business Object using the ATD2MtrCommTrckngAggregatorType Inbound Web Service.</p>
D1-EstimationSuppressionType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a EstimationSuppressionType.</p> <p>This component invokes the D1-EstimationSuppressionType Business Object using the ATD1EstimationSuppressionType Inbound Web Service.</p>
D2-InactiveMeasurementCheck	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a InactiveMeasurementCheck VEE Rule.</p> <p>This component invokes the D1-InactiveMeasurementCheck Business Object using the ATD2InactiveMeasurementCheck Inbound Web Service.</p>
D1-ChannelStatisticsType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatisticsType.</p> <p>This component invokes the D1-ChannelStatisticsType Business Object using the ATD1ChannelStatisticsType Inbound Web Service.</p>
D1-ChannelStatistics	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatistics.</p> <p>This component invokes the D1- ChannelStatistics Business Object using the ATD1ChannelStatistics Inbound Web Service.</p>
D1-FacilityLite	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a FacilityLite.</p> <p>This component invokes the D1- FacilityLite Business Object using the ATD1FacilityLite Inbound Web Service.</p>

Component	Description
D1-SpecificationLookup	Used to perform actions such as ADD, READ, UPDATE, and DELETE a SpecificationLookup.  This component invokes the D1-SpecificationLookup Business Object using the ATD1SpecificationLookup Inbound Web Service.
D1-MeasuringCompTypLite	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MeasuringCompTypLite.  This component invokes the D1-MeasuringCompTypLite Business Object using the ATD1MeasuringCompTypLite Inbound Web Service.
D1-GetDvcFrmIdenTypFlag	Used to retrieve Device ID By Identifier and Type Flag using the ATD1 GetDvcFrmIdenTypFlag Inbound Web Service.
D1-GetSimIdFromImd	Used to retrieve Simd ID By IMD ID using the ATD1GetSimIdFromImd Inbound Web Service.
D1-GetMCFrmDvcExtId	Used to retrieve Measuring Component ID from Device External ID using the ATD1GetMCFrmDvcExtId Inbound Web Service.
D1-GetProductKeyFromSync	Used to Get Product Key from Sync Request ID using the ATD1 GetProductKeyFromSync Inbound Web Service.
D1-GetUsageFromExtID	Used to retrieve Usage ID from CCB Usage ID using the ATD1 GetUsageFromExtID Inbound Web Service.
D2-GetUSFromExtID	Used to retrieve US ID from External ID using the ATD1 GetUSFromExtID Inbound Web Service.
D1-GetDCFrmDvcExtId	Used to retrieve DC ID from External ID using the ATD1GetDCFrmDvcExtId Inbound Web Service.
D1-GetInstEvtFromDvcExId	Used to retrieve Install Event ID from Device External ID using ATD1GetInstEvtFromDvcExId Inbound Web Service.
D1-GetInstEvtFrmSPExtId	Used to retrieve Install Event ID from Service Point External ID using the ATD1GetInstEvtFrmSPExtId Inbound Web Service.
D1-GetMCFFromExtID	Used to retrieve Measuring Component ID from External ID using the ATD1GetMCFFromExtID Inbound Web Service.
D1-GetContactFromExtID	Used to retrieve Contact ID from External ID using the ATD1GetContactFromExtID Inbound Web Service.



Component	Description
D1-GetSpFromExtID	Used to retrieve Service Point ID from External ID using the ATD1GetSpFromExtID Inbound Web Service.
D1-GetSyncReqIdFrmExtId	Used to retrieve Sync Request ID from External ID using the ATD1GetSyncReqIdFrmExtId Inbound Web Service.

## Credit and Collection

Component	Description
C1-CollectionProcessAdd	Used to add a Collection Process record.  This component invokes the Inbound Web Service ATC1CollectionProcess using the C1CollectionProcAdd Business Service.
C1-CollectionProcessRead	Used to read a Collection Process record.  This component invokes the Inbound Web Service ATC1CollectionProcess using the C1CollectionProcRead Business Service.
C1-CollectionProcessUpdate	Used to update a Collection Process record.  This component invokes the Inbound Web Service ATC1CollectionProcess using the C1CollectionProcUpdate Business Service.
C1-CutProcessRead	Used to read a Cut Process record.  This component invokes the ATC1CutProcess Inbound Web Service using the C1CutProcRead Business Service.
C1-CutProcessUpdate	Used to update a Cut Process record.  This component invokes the Inbound Web Service ATC1CutProcess using the C1CutProcUpdate Business Service.
C1-OverdueProcessRead	Used to read an Overdue Process record.  This component invokes the Inbound Web Service ATC1OverdueProcess using the C1OverdueProcessRead Business Service.
C1-OverdueProcessUpdate	Used to update an Overdue Process record.  This component invokes the Inbound Web Service ATC1OverdueProcess using the C1OverdueProcessUpdate Business Service.

Component	Description
C1-PayPlanAdd	Used to create a Pay Plan record.  This component invokes the Inbound Web Service ATC1PayPlan using the C1PayPlanAdd Business Service.
C1-PayPlanRead	Used to read a Pay Plan record.  This component invokes the Inbound Web Service ATC1PayPlan using the C1PayPlanRead Business Service.
C1-PayPlanUpdate	Used to update a Pay Plan record.  This component invokes the Inbound Web Service ATC1PayPlan using the C1PayPlanUpdate Business Service.
C1-SeveranceProcessRead	Used to read a Severance Process record.  This component invokes the Inbound Web Service ATC1SeveranceProcess using the C1SeveranceProcessRead Business Service.
C1-SeveranceProcessUpdate	Used to update a Severance Process record.  This component invokes the Inbound Web Service ATC1SeveranceProcess using the C1SeveranceProcessUpdate Business Service.
C1-WriteOffRead	Used to read a Write Off record.  This component invokes the Inbound Web Service ATC1WriteOff using the C1WriteOffRead Business Service.
C1-WriteOffUpdate	Used to update a Write Off record.  This component invokes the Inbound Web Service ATC1WriteOff using the C1WriteOffUpdate Business Service.
C1-WriteOffProcessAdd	Used to create a Write Off Process record.  This component invokes the Inbound Web Service ATC1WriteOffProcess using the C1WriteOffProcessAdd Business Service.
C1-WriteOffProcessRead	Used to read a Write Off Process record.  This component invokes the Inbound Web Service ATC1WriteOffProcess using the C1WriteOffProcessRead Business Service.

Component	Description
C1-WriteOffProcessUpdate	Used to update a Write Off Process record.  This component invokes the Inbound Web Service ATC1WriteOffProcess using the C1WriteOffProcessUpdate Business Service.
C1-CollAgencyReferralAdd	Used to create a Collection Agency Referral record.  This component invokes the Inbound Web Service ATC1CollectionAgencyReferral using the C1CollAgencyRefAdd Business Service.
C1-CollAgencyReferralDelete	Used to update a Collection Agency Referral record.  This component invokes the Inbound Web Service ATC1CollectionAgencyReferral using the C1CollAgencyRefDelete Business Service.
C1-CollAgencyReferralRead	Used to read a Collection Agency Referral record.  This component invokes the Inbound Web Service ATC1CollectionAgencyReferral using the C1CollAgencyRefRead Business Service.
C1-CollAgencyReferralUpdate	Used to update a Collection Agency Referral record.  This component invokes the Inbound Web Service ATC1CollectionAgencyReferral using the C1CollAgencyRefUpdate Business Service.
C1-PayArrangementByBillAdd	Used add a Payment Arrangement by Bill record.  This component invokes the Inbound Web Service ATC1PaymentArrangementByBill using the C1PayArrangeByBillAdd Business Service.
C1-PayArrangementByBillRead	Used to read a Payment Arrangement by Bill record.  This component invokes the Inbound Web Service ATC1PayArrangeByBill using the C1PayArrangeByBillRead Business Service.
C1-PayArrangementByBillUpdate	Used to update a Payment Arrangement by Bill record.  This component invokes the Inbound Web Service ATC1PayArrangeByBill using the C1PayArrangeByBillUpdate Business Service.
C1-PaymentArrangementAdd	Used to add a Payment Arrangement record.  This component invokes the Inbound Web Service ATC1PayArrangement using the C1PayArrangementAdd Business Service.

---

<b>Component</b>	<b>Description</b>
C1-PaymentArrangementRead	Used to read a Payment Arrangement record.  This component invokes the Inbound Web Service ATC1PayArrangement using the C1PayArrangementRead Business Service.
C1-PaymentArrangementUpdate	Used to update a Payment Arrangement record.  This component invokes the Inbound Web Service ATC1PayArrangement using the C1PayArrangementUpdate Business Service.

---

## Customer Information

Component	Description
C1-AccountAdd	Used to create an Account record.  This component invokes the ATC1Account Inbound Web Service using the C1AccountPhysical Business Object.
C1-AccountUpdate	Used to update an existing Account record.  This component invokes the ATC1Account Inbound Web Service using the C1AccountPhysical Business Object.
C1-AccountDelete	Used to delete an existing Account record.  This component invokes the ATC1Account Inbound Web Service using the C1AccountPhysical Business Object.
C1-AccountRead	Used to read an existing Account record.  This component invokes the ATC1Account Inbound Web Service using the C1AccountPhysical Business Object.
C1-CaseBOAdd	Used to create a Case record.  This component invokes the ATC1CaseBO Inbound Web Service using the C1-Case Business Object.
C1-CaseBOUpdate	Used to update an existing Case record.  This component invokes the ATC1CaseBO Inbound Web Service using the C1-Case Business Object.
C1-CaseBORead	Used to read an existing Case record.  This component invokes the ATC1CaseBO Inbound Web Service using the C1-Case Business Object.
C1-AccountBSRead	Used to read an existing Account record.  This component invokes the ATC1AccountBS Inbound Web Service using the C1-AccountRead Business Service.
C1-AccountBSUpdate	Used to update an existing Account record.  This component invokes the ATC1AccountBS Inbound Web Service using the C1-AccountUpdate Business Service.

Component	Description
C1-ContractOptionAdd	Used to create a Contract Option record.  This component invokes the ATC1ContractOption Inbound Web Service using the C1ContractOptionPhysical Business Object.
C1-ContractOptionDelete	Used to delete an existing Contract Option record.  This component invokes the ATC1ContractOption Inbound Web Service using the C1ContractOptionPhysical Business Object.
C1-ContractOptionUpdate	Used to update (Update, Freeze and Cancel) an existing Contract Option record.  This component invokes the ATC1ContractOption Inbound Web Service using the C1ContractOptionPhysical Business Object.
C1-ContractOptionRead	Used to read an existing Contract Option record.  This component invokes the ATC1ContractOption Inbound Web Service using the C1ContractOptionPhysical Business Object.
C1-StartServiceRequestAdd	Used to add a Start Service Request.  This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-StartServiceRequestDelete	Used to delete a Start Service Request.  This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-StartServiceRequestRead	Used to read a Start Service Request.  This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-StartServiceRequestUpdate	Used to update a Start Service Request.  This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-StopServiceRequestAdd	Used to add a Stop Service Request.  This component invokes the ATC1StopServiceRequest Inbound Web Service using the C1-StopServiceRequest Business Object.

Component	Description
C1-StopServiceRequestDelete	Used to delete a Stop Service Request.  This component invokes the ATC1StopServiceRequest Inbound Web Service using the C1-StopServiceRequest Business Object.
C1-StopServiceRequestRead	Used to read a Stop Service Request.  This component invokes the ATC1StopServiceRequest Inbound Web Service using the C1-StopServiceRequest Business Object.
C1-StopServiceRequestUpdate	Used to update a Stop Service Request.  This component invokes the ATC1StopServiceRequest Inbound Web Service using the C1-StopServiceRequest Business Object.
C1-TransferServiceRequestAdd	Used to add a Transfer Service Request.  This component invokes the ATC1TransferServiceRequest Inbound Web Service using the C1-TransferServiceRequest Business Object.
C1-TransferServiceRequestDelete	Used to delete a Transfer Service Request.  This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-TransferServiceRequestRead	Used to read a Transfer Service Request.  This component invokes the ATC1TransferServiceRequest Inbound Web Service using the C1-TransferServiceRequest Business Object.
C1-TransferServiceRequestUpdate	Used to update a Transfer Service Request.  This component invokes the ATC1TransferServiceRequest Inbound Web Service using the C1-TransferServiceRequest Business Object.
C1-CreateSARelationshipSubSA	Used to create SA Relationship Sub SA record.  This component invokes the ATC1CreateSARelationshipSubSA Inbound Web Service using the C1CreateSARelationshipSubSA Service Script.
C1-RecommendBudget	Used to Recommend Budget.  This component invokes the ATC1Recommend Budget Inbound Web Service using the C1-RecommendBudget Business Service.

Component	Description
C1-ContractOptEventAdd	<p>Used to create a Contract Option Event record.</p> <p>This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventAdd Business Service.</p>
C1-ContractOptEventDelete	<p>Used to delete an existing Contract Option Event record.</p> <p>This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventDelete Business Service.</p>
C1-ContractOptEventRead	<p>Used to query an existing Contract Option Event record.</p> <p>This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventRead Business Service.</p>
C1-ContractOptEventUpdate	<p>Used to update an existing Contract Option Event record.</p> <p>This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventUpdate Business Service.</p>
C1-PersonAdd	<p>Used to create a Person record.</p> <p>This component invokes the ATC1Person Inbound Web Service using the C1PersonPhysical Business Object.</p>
C1-PersonUpdate	<p>Used to update an existing Person record.</p> <p>This component invokes the ATC1Person Inbound Web Service using the C1PersonPhysical Business Object.</p>
C1-PersonDelete	<p>Used to delete an existing Person record.</p> <p>This component invokes the ATC1Person Inbound Web Service using the C1PersonPhysical Business Object.</p>
C1-PersonRead	<p>Used to read an existing Person record.</p> <p>This component invokes the ATC1Person Inbound Web Service using the C1PersonPhysical Business Object.</p>



Component	Description
C1-PersonBSAdd	Used to create a Person record.  This component invokes the ATC1PersonBS Inbound Web Service using the C1-PersonAdd Business Service.
C1-PersonBSRead	Used to read a Person record.  This component invokes the ATC1PersonBS Inbound Web Service using the C1-PersonRead Business Service.
C1-PersonBSUpdate	Used to update a Person record.  This component invokes the ATC1PersonBS Inbound Web Service using the C1-PersonUpdate Business Service.
C1-PremiseAdd	Used to create a Premise record.  This component invokes the ATC1Premise Inbound Web Service using the C1PremisePhysical Business Object.
C1-PremiseUpdate	Used to update an existing Premise record.  This component invokes the ATC1Premise Inbound Web Service using the C1PremisePhysical Business Object.
C1-PremiseDelete	Used to delete an existing Premise record.  This component invokes the ATC1Premise Inbound Web Service using the C1PremisePhysical Business Object.
C1-PremiseRead	Used to read an existing Premise record.  This component invokes the ATC1Premise Inbound Web Service using the C1PremisePhysical Business Object.
C1-SARelationshipAdd	Used to create an SA Relationship record.  This component invokes the ATC1SARelationship Inbound Web Service using the C1SARelationshipAdd Business Service.
C1-SARelationshipUpdate	Used to update (update, activate, cancel, create sub SA) an existing SA Relationship record.  This component invokes the ATC1SARelationship Inbound Web Service using the C1SARelationshipUpdate Business Service.

Component	Description
C1-SARelationshipRead	Used to read an existing SA Relationship record.  This component invokes the ATC1SARelationship Inbound Web Service using the C1SARelationshipRead Business Service.
C1-ServiceAgreementAdd	Used to create a Service Agreement record.  This component invokes the ATC1ServiceAgreement Inbound Web Service using the C1ServiceAgreementPhysical Business Object.
C1-ServiceAgreementRead	Used to read an existing Service Agreement record.  This component invokes the ATC1ServiceAgreement Inbound Web Service using the C1ServiceAgreementPhysical Business Object.
C1-ServiceAgreementUpdate	Used to update (activate, apply new start option, cancel, close, cancel proposal SA, accept proposal SA, decline proposal SA, activate proposal SA, reactivate, stop) an existing Service Agreement record.  This component invokes the ATC1ServiceAgreementUpdate Inbound Web Service using the C1ServiceAgreementUpdate Business Service.
C1-StartStopUpdate	Used to invoke the Start Stop functionality including the cancel, stop and start actions.  This component invokes the ATC1StartStop Inbound Web Service using the C1StartStopUpdate Business Service.
C1-StartStopRead	Used to read a Start Stop record.  This component invokes the ATC1StartStop Inbound Web Service using the C1StartStopRead Business Service.
C1-StartStopBSUpdate	Used to invoke the Start Stop functionality including the cancel, stop and start actions.  This component invokes the ATC1StartStopBS Inbound Web Service using the C1-StartStopMaintenanceRead Business Service.
C1-StartStopBSRead	Used to read a Start Stop record.  This component invokes the ATC1StartStopBS Inbound Web Service using the C1-StartStopMaintenanceUpdate Business Service.

Component	Description
C1-StartServiceActionMethodAdd	<p>Used for adding a Start Service Action Method record.</p> <p>This component invokes the ATC1StartServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>
C1-StartServiceActionMethodDelete	<p>Used for deleting a Start Service Action Method record.</p> <p>This component invokes the ATC1StartServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>
C1-StartServiceActionMethodRead	<p>Used for reading a Start Service Action Method record.</p> <p>This component invokes the ATC1StartServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>
C1-StartServiceActionMethodUpdate	<p>Used for updating a Start Service Action Method record.</p> <p>This component invokes the ATC1StartServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>
C1-StopServiceActionMethodAdd	<p>Used for adding a Stop Service Action Method record.</p> <p>This component invokes the ATC1StopServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>
C1-StopServiceActionMethodDelete	<p>Used for deleting a Stop Service Action Method record.</p> <p>This component invokes the ATC1StopServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>
C1-StopServiceActionMethodRead	<p>Used for reading a Stop Service Action Method record.</p> <p>This component invokes the ATC1StopServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>

Component	Description
C1-StopServiceActionMethodUpdate	<p>Used for updating a Stop Service Action Method record.</p> <p>This component invokes the ATC1StopServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>
C1-SATypeStartOptionAdd	<p>Used for adding a SA Type Start Option record.</p> <p>This component invokes the ATC1SATypeStartOption Inbound Web Service using the C1-SATypeStartOptionPhysicalBO Business Object.</p>
C1-SATypeStartOptionDelete	<p>Used for deleting a SA Type Start Option record.</p> <p>This component invokes the ATC1SATypeStartOption Inbound Web Service using the C1-SATypeStartOptionPhysicalBO Business Object.</p>
C1-SATypeStartOptionRead	<p>Used for reading a SA Type Start Option record.</p> <p>This component invokes the ATC1SATypeStartOption Inbound Web Service using the C1-SATypeStartOptionPhysicalBO Business Object.</p>
C1-SATypeStartOptionUpdate	<p>Used for updating a SA Type Start Option record.</p> <p>This component invokes the ATC1SATypeStartOption Inbound Web Service using the C1-SATypeStartOptionPhysicalBO Business Object.</p>
C1-TransferServiceActionMethodAdd	<p>Used for adding a Transfer Service Action Method record.</p> <p>This component invokes the ATC1TransferServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>
C1-TransferServiceActionMethodDelete	<p>Used for deleting a Transfer Service Action Method record.</p> <p>This component invokes the ATC1TransferServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.</p>

Component	Description
C1-TransferServiceActionMethodRead	Used for reading a Transfer Service Action Method record.  This component invokes the ATC1TransferServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-TransferServiceActionMethodUpdate	Used for updating a Transfer Service Action Method record.  This component invokes the ATC1TransferServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
W1-BusinessRead	Used to query an existing ODM Business Contact record.  This component invokes the ATW1Person Inbound Web Service using the W1-Business Business Object.
W1-PersonRead	Used to query an existing ODM Person Contact record.  This component invokes the ATW1Person Inbound Web Service using the W1-Person Business Object.
X1-ServicePointAdd	Used to create a Service Point record.  This component invokes the ATX1ServicePoint Inbound Web Service using the X1D-ServicePoint Business Object.
X1-ServicePointDelete	Used to delete an existing Service Point record.  This component invokes the ATX1ServicePoint Inbound Web Service using the X1D-ServicePoint Business Object.
X1-ServicePointRead	Used to query an existing Service Point record.  This component invokes the ATX1ServicePoint Inbound Web Service using the X1D-ServicePoint Business Object.

## Digital Asset Cloud Service

Component	Description
X1-ControllableAssetSpec	Used to create controllable asset specification.  This component invokes the X1-ControllableAssetSpec business object using the ATX1ControllableAssetSpec Inbound Web Service.

Component	Description
X1-ControllableAsset	Used to create controllable asset.  This component invokes the X1-ControllableAsset business object using the ATX1ControllableAsset Inbound Web Service.
X1-CtrlDvcStatusCheckRespType	Used to create CtrlDvcStatusCheckRespType.  This component invokes the X1-CtrlDvcStatusCheckRespType business object using the ATX1CtrlDvcStatusCheckRespType IWS.
X1-CtrlDvcStatusCheckComm	Used to create CtrlDvcStatusCheckComm.  This component invokes the X1-CtrlDvcStatusCheckComm business object using the ATX1CtrlDvcStatusCheckCommIWS.
X1-CtrlDvcStatusCheck	Used to create CtrlDvcStatusCheck.  This component invokes the X1-CtrlDvcStatusCheck business object using the ATX1CtrlDvcStatusCheck IWS.
X1-CtrlDvcHeadEndSystem	Used to create CtrlDvcHeadEndSystem.  This component invokes the X1-CtrlDvcHeadEndSystem business object using the ATX1CtrlDvcHeadEndSystemIWS.
X1-HowToSendSvcTaskResponse	Used to create HowToSendSvcTaskResponse.  This invokes the X1-HowToSendSvcTaskResponse business object using the ATX1HowToSendSvcTaskResponseIWS.
X1-CtrlDvcStatusCheckCommType	Used to create CtrlDvcStatusCheckCommType.  This invokes X1-CtrlDvcStatusCheckCommType business object using the ATX1CtrlDvcStatusCheckCommType IWS.
X1-DigitalAssetEnrollTaskType	Used to create DigitalAssetEnrollTaskType.  This component invokes the X1-DigitalAssetEnrollTaskType business object using the ATX1DigitalAssetEnrollTaskType IWS.
X1-DigitalAssetEnrollTask	Used to create DigitalAssetEnrollTask.  This component invokes the X1-DigitalAssetEnrollTask business object using the ATX1DigitalAssetEnrollTask IWS.

Component	Description
X1-EventSettlementCalcGroup	<p>Used to create EventSettlementCalcGroup.</p> <p>This component invokes the X1-EventSettlementCalcGroup business object using the ATX1EventSettlementCalcGroup IWS.</p>
X1-EventSettlementCalcRule	<p>Used to create EventSettlementCalcRule.</p> <p>This component invokes the X1-EventSettlementCalcRule business object using the ATX1EventSettlementCalcRule IWS.</p>
X1-KWhAvdBussnessFlag	<p>Used to create KWhAvdBussnessFlag.</p> <p>This component invokes the X1-KWhAvdBussnessFlag business object using the ATX1KWhAvdBussnessFlag IWS.</p>
X1-EventSettlementTransaction	<p>Used to create EventSettlementTransaction.</p> <p>This component invokes the X1-EventSettlementTransaction business object using the ATX1EventSettlementTransaction IWS.</p>
X1-CtrlDvcStatusCheckType	<p>Used to create CtrlDvcStatusCheckRespType.</p> <p>This component invokes the X1-CtrlDvcStatusCheckType business object using the ATX1CtrlDvcStatusCheckType IWS.</p>
X1-UpdateCDL	<p>Used to create UpdateCDL.</p> <p>This component invokes the X1-UpdateCDL business object using the ATX1UpdateCDL IWS.</p>
X1-DeviceLocation	<p>Used to create DeviceLocation.</p> <p>This component invokes the X1-DeviceLocation business object using the ATX1DeviceLocation IWS.</p>
X1-CtrlDvcStatusCheckResp	<p>Used to create CtrlDvcStatusCheckResp.</p> <p>This component invokes the X1-CtrlDvcStatusCheckResp business object using the ATX1CtrlDvcStatusCheckResp IWS.</p>
X1-ControllableDevice	<p>Used to create ControllableDevice.</p> <p>This component invokes the X1-ControllableDevice business object using the ATX1ControllableDevice IWS.</p>

Component	Description
X1-ControllableDeviceType	<p>Used to delete an existing Contract Option Event record.</p> <p>This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventDelete Business Service.</p>
C1-ContractOptEventRead	<p>Used to create ControllableDeviceType.</p> <p>This component invokes the X1-ControllableDeviceType business object using the ATX1ControllableDeviceType IWS.</p>
X1-ControllableAssetType	<p>Used to create ControllableAssetType.</p> <p>This component invokes the X1-ControllableAssetType business object using the ATX1ControllableAssetType IWS.</p>
X1-DeviceLocationType	<p>Used to create DeviceLocationType.</p> <p>This component invokes the X1-DeviceLocationType business object using the ATX1DeviceLocationType IWS.</p>
X1-ProgramSubscriptionType	<p>Used to create ProgramSubscriptionType.</p> <p>This component invokes the X1-ProgramSubscriptionType business object using the ATX1ProgramSubscriptionType IWS.</p>
X1-ProgramCalculationGroup	<p>Used to create ProgramCalculationGroup.</p> <p>This component invokes the X1-ProgramCalculationGroup business object using the ATX1ProgramCalculationGroup IWS.</p>
X1-ProgramSubscription	<p>Used to create ProgramSubscription.</p> <p>This component invokes the X1-ProgramSubscription business object using the ATX1ProgramSubscription IWS.</p>
X1-GenericProgramCalcRule	<p>Used to create GenericProgramCalcRule.</p> <p>This component invokes the X1-GenericProgramCalcRule business object using the ATX1GenericProgramCalcRule IWS.</p>
X1-DigitalAssetUnenrollTaskTyp	<p>Used to create DigitalAssetUnenrollTaskTyp.</p> <p>This component invokes the X1-DigitalAssetUnenrollTaskTyp business object using the ATX1 DigitalAssetUnenrollTaskTyp IWS.</p>



Component	Description
X1-DAUnenrollActionMethod	Used to create DAUnenrollActionMethod.  This component invokes the X1-DAUnenrollActionMethod business object using the ATX1 DAUnenrollActionMethod IWS.
X1-DAEnrollActionMethod	Used to create DAEnrollActionMethod.  This component invokes the X1-DAEnrollActionMethod business object using the ATX1 DAEnrollActionMethod IWS.
X1-InitiativeDigitalAsset	Used to create InitiativeDigitalAsset.  This component invokes the X1-InitiativeDigitalAsset business object using the ATX1InitiativeDigitalAsset IWS.
X1-MeteredServiceCrit	Used to create MeteredServiceCrit.  This component invokes the X1-MeteredServiceCrit business object using the ATX1MeteredServiceCrit IWS.
X1-DigitalAssetMasterConfig	Used to create DigitalAssetMasterConfig.  This component invokes the X1-DigitalAssetMasterConfig business object using the ATX1DigitalAssetMasterConfig IWS.
X1-DigitalAssetUnenrollTask	Used to create DigitalAssetUnenrollTask.  This component invokes the X1-DigitalAssetUnenrollTask business object using the ATX1DigitalAssetUnenrollTask IWS.
X1-NMSDigitalAssetContact	Used to create NMSDigitalAssetContact.  This component invokes the X1-NMSDigitalAssetContact business object using the ATX1NMSDigitalAssetContact IWS.
X1-NMSDigitalAssetCustSync	Used to create NMSDigitalAssetCustSync.  This component invokes the X1-NMSDigitalAssetCustSync business object using the ATX1NMSDigitalAssetCustSync IWS.
X1-NMSDigitalAssetSubscription	Used to create NMSDigitalAssetSubscription.  This component invokes the X1-NMSDigitalAssetSubscription business object using the ATX1NMSDigitalAssetSubscription IWS.

Component	Description
X1-NMSDigitalAssetLocation	Used to create NMSDigitalAssetLocation.  This component invokes the X1-NMSDigitalAssetLocation business object using the ATX1NMSDigitalAssetLocation IWS.
X1-NMSDigitalAssetFacility	Used to create NMSDigitalAssetFacility.  This component invokes the X1-NMSDigitalAssetFacility business object using the ATX1NMSDigitalAssetFacility IWS.
X1-NMSDigitalAssetCustOutMsg	Used to create NMSDigitalAssetCustOutMsg.  This component invokes the X1-NMSDigitalAssetCustOutMsg business object using the ATX1NMSDigitalAssetCustOutMsg IWS.
X1-CtrlDvcStatusCheckOBMsg	Used to create CtrlDvcStatusCheckOBMsg.  This component invokes the X1-CtrlDvcStatusCheckOBMsg business object using the ATX1CtrlDvcStatusCheckOBMsg IWS.
D1-RemoveIMDObjectCount	Used to perform actions such as ADD, READ, UPDATE, and DELETE of RemoveIMDObjectCount.  This component invokes the D1-RemoveIMDObjectCount using the ATD1RemoveIMDObjectCount Inbound Web Service.
D1-IMDFilter	This is the wrapper for the service that filters out IMD's based on the configuration of the device.  This invokes the D1-IMDFilter Business Service using the ATD1IMDFilter Inbound Web Service.
D8-ReadOnDemandReadResultType	Used to perform actions such as ADD, READ, UPDATE and DELETE a Read On Demand Read Result Type for Itron.  This component invokes the D8-ReadOnDemandReadResultType Business Object using the ATD8ReadOnDemandReadResultType.

## Data Model

Component	Description
D1-SmartMeter	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Smart Meter.</p> <p>This component invokes the D1-SmartMeter Business Object using the ATD1SmartMeter Inbound Web Service.</p>
D1-DvcCommEquipment	<p>Used to create a Device Communication Equipment.</p> <p>This component invokes the D1-DvcCommEquipment using the ATD1DvcCommEquipment inbound web service.</p>
D1-DvcCommEquipmentType	<p>Used to create a Device Communication Equipment Type.</p> <p>This component invokes the D1-DvcCommEquipmentType using ATD1DvcCommEquipmentType Inbound Web Service.</p>
D1-DeviceConfiguration	<p>Used to add Device Configuration to a device.</p> <p>This component invokes the D1-DeviceConfiguration Business Object using the ATD1DeviceConfigurationSVC Inbound Web Service.</p>
D1-IntervalChannel	<p>Used to add interval measuring components to a device configuration.</p> <p>This component invokes the D1-IntervalChannel Business Object using the ATD1IntervalChannel Inbound Web Service.</p>
D1-Register	<p>Used to add scalar measuring components to a device configuration.</p> <p>This component invokes the D1-Register Business Object using the ATD1Register Inbound Web Service.</p>
D1-ServicePoint	<p>Used to create a Service Point.</p> <p>This component invokes the D1-ServicePoint Business Object using the ATD1ServicePoint Inbound Web Service.</p>
D1-SmartMeterInstallEvent	<p>Used to create an installation event for a Smart Meter.</p> <p>This component invokes the D1-SmartMeterInstallEvent Business Object using the ATD1SmartMeterInstallEvent Inbound Web Service.</p>

Component	Description
D1-ManualMeterInstallEvent	Used to create an installation event for a Manual Meter.  This component invokes the D1-ManualMeterInstallEvent Business Object using the ATD1ManualMeterInstallEvent Inbound Web Service.
D1-Transformer	Used to create a Facility (Transformer) for a service type.  This component invokes the D1-Transformer Business Object using the ATD1Transformer Inbound Web Service.
D1-ElectricityNetworkLocation	Used to create an Electricity Network Location.  This component invokes the D1-ElectricityNetworkLocation Business Object using the ATD1ElectricityNetworkLocation Inbound Web Service.
D1-IntervalScratchpad	Used to create Interval Scratchpad MC.  This component invokes the D1-IntervalScratchpad Business Object using the ATD1IntervalScratchpad Inbound Web Service.
D1-Person	Used to create a Person.  This component invokes the D1-Person Business Object using the ATD1Person Inbound Web Service.
D1-Business	Used to create a Business.  This component invokes the D1-Business Business Object using the ATD1Business Inbound Web Service.
D1-RegisterAutoRead	Used to add register auto read measuring components to a device configuration.  This component invokes the D1-RegisterAutoRead Business Object using the ATD1RegisterAutoRead Inbound Web Service.
D1-Item	Used to perform actions such as ADD, READ, UPDATE and DELETE an Item.  This component invokes the D1-Item Business Object using the ATD1Item Inbound Web Service.

Component	Description
D1-ItemInstallEvent	Used to create an installation event for a Smart Meter.  This component invokes the D1-ItemInstallEvent Business Object using the ATD1ItemInstallEvent Inbound Web Service.
D1-AutoReadRegisterType	Used to define the properties of measuring components automatically read on a regular basis, but for which only one measurement is received at a time, meaning one measurement per Initial Measurement.  This component invokes the D1-AutoReadRegisterType Business Object using the ATD1AutoReadRegisterType Inbound Web Service.
D1-DeviceConfigurationType	Used to create a device configuration type used to create device configuration for a device.  This component invokes the D1-DeviceConfigurationType Business Object using the ATD1DeviceConfigurationType Inbound Web Service.
D1-ExceptionType	Used to set up VEE Exception Types.  This component invokes the D1-ExceptionType Business Object using the ATD1ExsceptionType Inbound Web Service.
D1-ExternalApplication	Used to create a Service Provider.  This component invokes the D1-ExternalApplication Business Object using the ATD1ExternalApplication Inbound Web Service.
D1-HeadEndSystem	Used to create a Head End system service provider.  This component invokes the D1-HeadEndSystem Business Object using the ATD1HeadEndSystem Inbound Web Service.
D1-ItemConfigurationType	Creates a configuration types for Item Types that can represent badged items.  This component invokes the D1-ItemConfigurationType Business Object using the ATD1ItemConfigurationType Inbound Web Service.

Component	Description
D1-ItemType	<p>Creates an item type applicable to badged and unbadged non-meter devices.</p> <p>This component invokes the D1-ItemType Business Object using the ATD1ItemType Inbound Web Service.</p>
D1-ManualMeterType	<p>Creates an item type applicable to badged and unbadged non-meter devices.</p> <p>This component invokes the D1-ManualMeterType Business Object using the ATD1ManualMeterType Inbound Web Service.</p>
D1-ServiceType	<p>Used to create a Service Type.</p> <p>This component invokes the D1-ServiceType Business Object using the ATD1ServiceType Inbound Web Service.</p>
D1-SmartMeterType	<p>Used to create a Device of Smart Meter Type.</p> <p>This component invokes the D1-SmartMeterType Business Object using the ATD1SmartMeterType Inbound Web Service.</p>
D1-TimeOfUse	<p>Used to create a TOU.</p> <p>This component invokes the D1-TimeOfUse Business Object using the ATD1TimeOfUse Inbound Web Service.</p>
D1-UnitOfMeasure	<p>Used to create a Unit of Measure.</p> <p>This component invokes the D1-UnitOfMeasure Business Object using the ATD1 UnitOfMeasure Inbound Web Service.</p>
D1-Manufacturer	<p>Describes the structure and business rules applicable to manufacturers.</p> <p>This component invokes the D1-Manufacturer Business Object using the ATD1 Manufacturer Inbound Web Service.</p>
D1-MeasurementCycle	<p>Describes the Measurement Cycle creation.</p> <p>This component invokes the D1-MeasurementCycle Business Object using the ATD1MeasurementCycle Inbound Web Service.</p>
D1-RegisterTypePhysical	<p>Used to create Register Type component.</p> <p>This component invokes the D1-RegisterTypePhysical Business Object using the ATD1RegisterTypePhysical Inbound Web Service.</p>

Component	Description
D1-ServicePointType	<p>A generic component used to create Service point type.</p> <p>This component invokes the D1- ServicePointType Business Object using the ATD1ServicePointType Inbound Web Service.</p>
D1-MeasurementCycleRoute	<p>Used to create Measurement Cycle Route.</p> <p>This component invokes the D1- MeasurementCycleRoute Business Object using the ATD1MeasurementCycleRoute Inbound Web Service.</p>
D1-HowToProcessDeviceInfo	<p>Describes how to process the Device Related Information.</p> <p>This component invokes the D1- HowToProcessDeviceInfo Business Object using the ATD1HowToProcessDeviceInfo Inbound Web Service.</p>
D1-HeadendSQLLookup	<p>A non-instantiable Extendable Lookup BO that provides translation between an external SQI sent in via a meter data source/provider, such as a head-end system and SQIs that have been configured within the application. SGG adapter products will deliver instantiable child BOs of this BO if SQI translation is needed.</p> <p>This component invokes the D1- HeadendSQLLookup Business Object using the ATD1HeadendSQLLookup Inbound Web Service.</p>
D1-ServiceQuantityIdentifier	<p>Describes the structure and business rules applicable to Service Quantity Identifier definitions.</p> <p>This component invokes the D1- ServiceQuantityIdentifier Business Object using the ATD1ServiceQuantityIdentifier Inbound Web Service.</p>
D1-Market2	<p>Valid Service Providers are Market Participants.</p> <p>This component invokes the D1-Market2 Business Object using the ATD1Market2 Inbound Web Service.</p>
D1-ContactType	<p>Describes Contact Type.</p> <p>This component invokes the D1-ContactType Business Object using the ATD1ContactType Inbound Web Service.</p>

Component	Description
D2-DynCompValidation	Used to perform actions such as ADD, READ, UPDATE, and DELETE a DynCompValidation.  This component invokes the D2-DynCompValidation Business Object using the ATD2DynCompValidation Inbound Web Service.

## Data Synchronization

Component	Description
C1-FASyncRequestRead	Used to read an FA Sync Request record.  This component invokes the ATC1FASyncRequestRead Inbound Web Service using the C1-FASyncRequest Business Object.
C1-GetSyncRequestId	Used to get the sync request ID of a given primary key ID (for example: Person, SP, SA, Contract Option, Contract Option Event, etc) using a specific query zone.  The following zones can be used: <ul style="list-style-type: none"> <li>• C1-GETSYNCU2 - Get Sync Req ID using Contract Option Event ID</li> <li>• C1-GETSYNCU3 - Get Sync Req ID using Contract Option ID</li> <li>• C1-GETPERSYN - Get Sync Request ID using Person ID</li> <li>• C1-GETSASYN - Get Sync Request ID using Service Agreement ID</li> <li>• C1-GETFASYN - Get Sync Request ID using Field Activity ID</li> <li>• C1-GETSYNCRQ - Get Sync Request ID using External ID</li> </ul> This component invokes the ATC1GetSyncRequestId Inbound Web Service using C1-GetSyncRequestId Business Service.
C1-MDM2ContOptEvtSyncReqRead	Used to read an MDM2 Contract Option Event Sync Request record.  This component invokes the ATC1MDM2ContrOptEvtSyncReqRead Inbound Web Service using the C1-MDM2ContrOptEvtSyncRequest Business Object.



Component	Description
C1-MDM2ContractOptSyncReqRead	<p>Used to read an MDM2 Contract Option Sync Request record.</p> <p>This component invokes the ATC1MDM2ContractOptSyncReqRead Inbound Web Service using the C1-MDM2ContractOptSyncRequest Business Object.</p>
C1-NtfContactPreferenceSyncUpdate	<p>Used to update a Notification Contact Preference Sync Request.</p> <p>This component invokes the ATC1NtfContactPreferenceSyncRead Inbound Web Service using the C1-NtfContactPreferenceSync Business Object.</p>
C1-MDM2PersonSyncRequestRead	<p>Used to read an MDM2 Person Sync Request record.</p> <p>This component invokes the ATC1MDM2PersonSyncReqRead Inbound Web Service using the C1-MDM2PersonSyncRequest Business Object.</p>
C1-MDM2SARelSyncRequestRead	<p>Used to read an MDM2 SA Relationship Sync Request record.</p> <p>This component invokes the ATC1MDM2SARelSyncRequestRead Inbound Web Service using the C1-MDM2SARelSyncRequest Business Object.</p>
C1-MDM2SASyncRequestRead	<p>Used to read an MDM2 Service Agreement Sync Request record.</p> <p>This component invokes the ATC1MDM2SASyncRequestRead Inbound Web Service using the C1-MDM2SASyncRequest Business Object.</p>
D1-InstallEventSyncRequestRead	<p>Used to read an ODM Install Event Sync Request record.</p> <p>This component invokes the ATD1InstallEventSyncRequestRead Inbound Web Service using D1-InstallEventSyncRequest Business Object.</p>
W1-MDMAssetSyncRequestRead	<p>Used to read an MDM Asset Sync Request record.</p> <p>This component invokes the ATW1MDMAssetSyncRequestRead Inbound Web Service using the W1-MDMAssetSyncRequest Business Object.</p>

Component	Description
W1-OngoingSyncRequestAssetNodeRead	<p>Used to read an Asset-Node Ongoing Sync Request record.</p> <p>This component invokes the ATW1OngoingSyncRequestAssetNodeRead Inbound Web Service using the W1-OngoingSyncRequestAssetNode Business Object.</p>
X1-GetInboundSyncRequestId	<p>Used to retrieve the Inbound Sync Request Id depending on the query zone used.</p> <p>The following zones can be used:</p> <ul style="list-style-type: none"> <li>• X1-GETSYNCEX - Get Inbound Sync Request ID using External ID</li> </ul> <p>This component invokes the ATX1GetSyncRequestInId Inbound Web Service using the X1-GetSyncRequestInId Business Service.</p>
C1-ExternalRepoPlusBillingSync	<p>Used to read a Billing Data Extract Sync Request record.</p> <p>This component invokes the ATC1ExternalRepoPlusBillingSync Inbound Web Service using C1-ExternalRepoPlusBillingSync Business Object.</p>
C1-ExternalRepoPlusCusDataSync	<p>Used to read a Customer Data Extract Sync Request record.</p> <p>This component invokes the ATC1ExternalRepoPlusCusDataSyncRead Inbound Web Service using C1-ExternalRepoPlusCusDataSync Business Object.</p>
C1-ExternalRepoPlusSPMeterSync	<p>Used to read a SP and Meter Data Extract Sync Request record.</p> <p>This component invokes the ATC1ExternalRepoPlusBillingSyncRead Inbound Web Service using the C1-ExternalRepoPlusSPMeterSync Business Object.</p>
C1-ExternalRepoPlusSASPSyncRead	<p>Used to read a SA/SP Data Sync for DataConnect v1+.</p> <p>This component invokes the ATC1ExternalRepoPlusSASPSync Inbound Web Service using the C1-ExternalRepoSASPSync Business Object.</p>

Component	Description
C1-ExternalRepoPlusSASPSyncUpdate	Used to update a SA/SP Data Sync for DataConnect v1+  This component invokes the ATC1ExternalRepoPlusSASPSync Inbound Web Service using the C1-ExternalRepoSASPSync Business Object.
C1-ExternalRepoPlusSPMeterSyncRead	Used to read a Service Point Sync Request record.  This component invokes the ATC1ExternalRepoPlusSPMeterSync Inbound Web Service using the C1-ExternalRepoPlusSPMeterSync Business Object.
C1-ExternalRepoPlusSPMeterSyncUpdate	Used to update a Service Point Sync Request record.  This component invokes the ATC1ExternalRepoPlusSPMeterSync Inbound Web Service using the C1-ExternalRepoPlusSPMeterSync Business Object.
C1-ExternalRepoPlusMailAddSyncRead	Used to read a Mailing Address Data for DataConnect v1+ sync.  This component invokes the ATC1ExternalRepoPlusMailAddSync Inbound Web Service using the C1-ExternalRepoPlusMailAddSync Business Object.
C1-ExternalRepoPlusMailAddSync Update	Used to read a Mailing Address Data for DataConnect v1+ sync.  This component invokes the ATC1ExternalRepoPlusMailAddSync Inbound Web Service using the C1-ExternalRepoPlusMailAddSync Business Object.

## Field Order

Component	Description
C1-AppointmentRead	Used to read an existing Appointment record.  This component invokes the ATC1Appointment Inbound Web Service using the C1AppointmentRead Business Service.
C1-AppointmentUpdate	Used to update an existing Appointment record.  This component invokes the ATC1Appointment Inbound Web Service using the C1AppointmentUpdate Business Service.

Component	Description
C1-DispatchFieldActivityRead	<p>Used to read an existing Dispatch Field Activity record.</p> <p>This component invokes the ATC1DispatchFA Inbound Web Service using the C1DispatchFARead Business Service.</p>
C1-DispatchFieldActivityUpdate	<p>Used to update an existing Dispatch Field Activity record.</p> <p>This component invokes the ATC1DispatchFA Inbound Web Service using the C1DispatchFAUpdate Business Service.</p>
C1-GenerateFreezeApprAdjustment	<p>Used to generate and freeze an Approval Adjustment record.</p> <p>This component invokes the ATC1GenerateFreezeApprAdjustment Inbound Web Service using the C1-CreateAdjustmentWithAppr Business Service</p>
C1-FAUploadStagingAdd	<p>Used to create an FA Upload Staging record.</p> <p>This component invokes the ATC1FAUploadStaging Inbound Web Service using the C1FAUploadStagingAdd Business Service.</p>
C1-FAUploadStagingRead	<p>Used to read an existing FA Upload Staging record.</p> <p>This component invokes the ATC1FAUploadStaging Inbound Web Service using the C1FAUploadStagingRead Business Service.</p>
C1-FAUploadStagingUpdate	<p>Used to update an existing FA Upload Staging record.</p> <p>This component invokes the ATC1FAUploadStaging Inbound Web Service using the C1FAUploadStagingUpdate Business Service.</p>
C1-FAUploadStagingDelete	<p>Used to delete an existing FA Upload Staging record.</p> <p>This component invokes the ATC1FAUploadStaging Inbound Web Service using the C1FAUploadStagingDelete Business Service.</p>
C1-FieldActivityAdd	<p>Used to create a Field Activity record.</p> <p>This component invokes the ATC1FieldActivity Inbound Web Service using the C1FieldActivityPhysical Business Object.</p>

Component	Description
C1-FieldActivityRead	Used to read an existing Field Activity record.  This component invokes the ATC1FieldActivity Inbound Web Service using the C1FieldActivityPhysical Business Object.
C1-FieldActivityUpdate	Used to update an existing Field Activity record.  This component invokes the ATC1FieldActivity Inbound Web Service using the C1FieldActivityUpdate Business Service.
C1-FACompletionByExtSystem	Used to complete a pending Field Activity record.  This component invokes the ATC1FACompletion Inbound Web Service using the C1FACompletion Business Service.
C1-FieldOrderAdd	Used to create a Field Order record.  This component invokes the ATC1FieldOrder Inbound Web Service using the C1FieldOrderPhysical Business Object.
C1-FieldOrderUpdate	Used to update an existing Field Order record.  This component invokes the ATC1FieldOrder Inbound Web Service using the C1FieldOrderUpdate Business Service.
C1-FieldOrderRead	Used to read an existing Field Order record.  This component invokes the ATC1FieldOrder Inbound Web Service using the C1FieldOrderUpdate Business Service.
D1-EnableService	Used to create a Enable Service.  This component invokes the D1-EnableService Business Object using the ATD1EnableService Inbound Web Service.
D1-DisableService	Used to create a Disable Service.  This component invokes the D1- DisableService Business Object using the ATD1 DisableService Inbound Web Service.
D1-BackToBackService	Used to create a BackToBackService.  This component invokes the D1- BackToBackService Business Object using the ATD1BackToBackService IWS.

Component	Description
D1-CutServiceForNonPayment	Used to create a CutServiceForNonPayment.  This component invokes the D1-CutServiceForNonPayment Business Object using the ATD1 CutServiceForNonPayment.
D1-ReconnectForPayment	Used to create a ReconnectForPayment.  This component invokes the D1-ReconnectForPayment Business Object using the ATD1ReconnectForPayment IWS.

## Extendable Lookup

Component	Description
X1-C2MSATypeMappingAdd	Used to create a Customer to Meter SA Type mapping Extendable Lookup record.  This component invokes the ATX1C2MSATypeMapping Inbound Web Service using the X1-C2MSATypeMapping Business Object.
X1-C2MSATypeMappingUpdate	Used to update an existing Customer to Meter SA Type mapping Extendable Lookup record.  This component invokes the ATX1C2MSATypeMapping Inbound Web Service using the X1-C2MSATypeMapping Business Object.
X1-C2MSATypeMappingDelete	Used to delete an existing Customer to Meter SA Type mapping Extendable Lookup record.  This component invokes the ATX1C2MSATypeMapping Inbound Web Service using the X1-C2MSATypeMapping Business Object.
X1-C2MSATypeMappingRead	Used to query an existing Customer to Meter SA Type mapping Extendable Lookup record.  This component invokes the ATX1C2MSATypeMapping Inbound Web Service using the X1-C2MSATypeMapping Business Object.

Component	Description
X1-CCBMDM-MDMCCB- LookupAdd	<p>Used to create the mapping values for each field that requires translation between CCB and MDM Maintenance Objects.</p> <p>The following lookup value can be used:</p> <ul style="list-style-type: none"> <li>• C1_HIGHLIGHT_TYPE_FLG - Highlight Type</li> <li>• C1_USG_RQST_SA_SKIP_RSN_FLG - SA Skip Reason</li> <li>• CONT_OPT_TYPE_CD - Contract Option Type</li> <li>• DISCON_LOC_CD - Disconnect Location</li> <li>• FA_TYPE_CD - Field Activity Type</li> <li>• KEY_SW - key</li> <li>• LS_SL_FLG - Life Support / Sensitive Load</li> <li>• OK_TO_ENTER_SW - OK to Enter</li> <li>• PER_OR_BUS_FLG - Contact Type</li> </ul> <p>This component invokes the ATX1CCBMDM-MDMCCB-Lookup Inbound Web Service using the X1-CCBMDM-MDMCCB-Lookup Business Object.</p>
X1-CCBMDM-MDMCCB- LookupUpd	<p>Used to update an existing mapping values for each field that requires translation between CCB and MDM Maintenance Objects.</p> <p>The following lookup value can be used:</p> <ul style="list-style-type: none"> <li>• C1_HIGHLIGHT_TYPE_FLG - Highlight Type</li> <li>• C1_USG_RQST_SA_SKIP_RSN_FLG - SA Skip Reason</li> <li>• CONT_OPT_TYPE_CD - Contract Option Type</li> <li>• DISCON_LOC_CD - Disconnect Location</li> <li>• FA_TYPE_CD - Field Activity Type</li> <li>• KEY_SW - key</li> <li>• LS_SL_FLG - Life Support / Sensitive Load</li> <li>• OK_TO_ENTER_SW - OK to Enter</li> <li>• PER_OR_BUS_FLG - Contact Type</li> </ul> <p>This component invokes the ATX1CCBMDM-MDMCCB-Lookup Inbound Web Service using the X1-CCBMDM-MDMCCB-Lookup Business Object.</p>

Component	Description
X1-CCBMDM-MDMCCB- LookupDel	<p>Used to delete an existing mapping values for each field that requires translation between CCB and MDM Maintenance Objects.</p> <p>The following lookup value can be used:</p> <ul style="list-style-type: none"> <li>• C1_HIGHLIGHT_TYPE_FLG - Highlight Type</li> <li>• C1_USG_RQST_SA_SKIP_RSN_FLG - SA Skip Reason</li> <li>• CONT_OPT_TYPE_CD - Contract Option Type</li> <li>• DISCON_LOC_CD - Disconnect Location</li> <li>• FA_TYPE_CD - Field Activity Type</li> <li>• KEY_SW - key</li> <li>• LS_SL_FLG - Life Support / Sensitive Load</li> <li>• OK_TO_ENTER_SW - OK to Enter</li> <li>• PER_OR_BUS_FLG - Contact Type</li> </ul> <p>This component invokes the ATX1CCBMDM-MDMCCB-Lookup Inbound Web Service using the X1-CCBMDM-MDMCCB-Lookup Business Object.</p>
X1-CCBMDM-MDMCCB- LookupRead	<p>Used to query an existing mapping values for each field that requires translation between CCB and MDM Maintenance Objects.</p> <p>The following lookup value can be used:</p> <ul style="list-style-type: none"> <li>• C1_HIGHLIGHT_TYPE_FLG - Highlight Type</li> <li>• C1_USG_RQST_SA_SKIP_RSN_FLG - SA Skip Reason</li> <li>• CONT_OPT_TYPE_CD - Contract Option Type</li> <li>• DISCON_LOC_CD - Disconnect Location</li> <li>• FA_TYPE_CD - Field Activity Type</li> <li>• KEY_SW - key</li> <li>• LS_SL_FLG - Life Support / Sensitive Load</li> <li>• OK_TO_ENTER_SW - OK to Enter</li> <li>• PER_OR_BUS_FLG - Contact Type</li> </ul> <p>This component invokes the ATX1CCBMDM-MDMCCB-Lookup Inbound Web Service using the X1-CCBMDM-MDMCCB-Lookup Business Object.</p>



Component	Description
X1-ODMMDM-MDMODM- LookupAdd	<p>Used to create the mapping values for each field that requires translation between ODM and MDM maintenance objects.</p> <p>The following lookup value can be used:</p> <ul style="list-style-type: none"> <li>• ASSET_STATUS (Asset/Device Status)</li> <li>• ASSET_TYPE_CD (Asset Type/Device Type)</li> <li>• CONTACT_BUS_OBJ_CD (Contact Business Object)</li> <li>• DISCONNECT_LOC_FLG (Disconnect Location)</li> <li>• KEY_SW (Key)</li> <li>• LIFE_SUPPORT_SENS_LOAD_FLG (Life Support/Sensitive Load)</li> <li>• MR_INSTR_CD (SP Instruction)</li> <li>• MR_WARN_CD (SP Warning)</li> <li>• MTR_LOC_CD (Site Location)</li> <li>• OK_TO_ENTER_FLG (OK to Enter)</li> <li>• SVC_TYPE_FLG (Service Type)</li> </ul> <p>This component invokes the ATX1ODMMDM-MDMODM-Lookup Inbound Web Service using X1-ODMMDM-MDMODM-Lookup Business Object.</p>

Component	Description
X1-ODMMDM-MDMODM- LookupDelete	<p>Used to delete an existing mapping values for each field that requires translation between ODM and MDM maintenance objects.</p> <p>The following lookup value can be used:</p> <ul style="list-style-type: none"> <li>• ASSET_STATUS (Asset/Device Status)</li> <li>• ASSET_TYPE_CD (Asset Type/Device Type)</li> <li>• CONTACT_BUS_OBJ_CD (Contact Business Object)</li> <li>• DISCONNECT_LOC_FLG (Disconnect Location)</li> <li>• KEY_SW (Key)</li> <li>• LIFE_SUPPORT_SENS_LOAD_FLG (Life Support/Sensitive Load)</li> <li>• MR_INSTR_CD (SP Instruction)</li> <li>• MR_WARN_CD (SP Warning)</li> <li>• MTR_LOC_CD (Site Location)</li> <li>• OK_TO_ENTER_FLG (OK to Enter)</li> <li>• SVC_TYPE_FLG (Service Type)</li> </ul> <p>This component invokes the ATX1ODMMDM-MDMODM-Lookup Inbound Web Service using X1-ODMMDM-MDMODM-Lookup Business Object.</p>

---

Component	Description
X1-ODMMDM-MDMODM- LookupUpd	<p data-bbox="967 218 1511 310">Used to update and existing mapping values for each field that requires translation between ODM and MDM maintenance objects.</p> <p data-bbox="967 348 1386 380">The following lookup value can be used:</p> <ul data-bbox="967 380 1511 982" style="list-style-type: none"><li data-bbox="967 380 1435 411">• ASSET_STATUS (Asset/Device Status)</li><li data-bbox="967 428 1511 459">• ASSET_TYPE_CD (Asset Type/Device Type)</li><li data-bbox="967 476 1511 539">• CONTACT_BUS_OBJ_CD (Contact Business Object)</li><li data-bbox="967 556 1455 619">• DISCONNECT_LOC_FLG (Disconnect Location)</li><li data-bbox="967 636 1182 667">• KEY_SW (Key)</li><li data-bbox="967 684 1490 747">• LIFE_SUPPORT_SENS_LOAD_FLG (Life Support/Sensitive Load)</li><li data-bbox="967 764 1365 795">• MR_INSTR_CD (SP Instruction)</li><li data-bbox="967 812 1341 844">• MR_WARN_CD (SP Warning)</li><li data-bbox="967 861 1344 892">• MTR_LOC_CD (Site Location)</li><li data-bbox="967 909 1430 940">• OK_TO_ENTER_FLG (OK to Enter)</li><li data-bbox="967 957 1360 989">• SVC_TYPE_FLG (Service Type)</li></ul> <p data-bbox="967 1005 1484 1121">This component invokes the ATX1ODMMDM-MDMODM-Lookup Inbound Web Service using X1-ODMMDM-MDMODM-Lookup Business Object.</p>

---

Component	Description
X1-ODMMDM-MDMODM- LookupRead	<p>Used to query an existing mapping values for each field that requires translation between ODM and MDM maintenance objects.</p> <p>The following lookup value can be used:</p> <ul style="list-style-type: none"> <li>• ASSET_STATUS (Asset/Device Status)</li> <li>• ASSET_TYPE_CD (Asset Type/Device Type)</li> <li>• CONTACT_BUS_OBJ_CD (Contact Business Object)</li> <li>• DISCONNECT_LOC_FLG (Disconnect Location)</li> <li>• KEY_SW (Key)</li> <li>• LIFE_SUPPORT_SENS_LOAD_FLG (Life Support/Sensitive Load)</li> <li>• MR_INSTR_CD (SP Instruction)</li> <li>• MR_WARN_CD (SP Warning)</li> <li>• MTR_LOC_CD (Site Location)</li> <li>• OK_TO_ENTER_FLG (OK to Enter)</li> <li>• SVC_TYPE_FLG (Service Type)</li> </ul> <p>This component invokes the ATX1ODMMDM-MDMODM-Lookup Inbound Web Service using X1-ODMMDM-MDMODM-Lookup Business Object.</p>

## Financial

Component	Description
C1-AdjustmentAdd	<p>Used to adding an Adjustment record.</p> <p>This component invokes the ATC1Adjustment Inbound Web Service using the C1AdjustmentAdd Business Service.</p>
C1-AdjustmentDelete	<p>Used to delete an Adjustment.</p> <p>This component invokes the ATC1Adjustment Inbound Web Service using the C1AdjustmentDelete Business Service.</p>
C1-AdjustmentRead	<p>Used to read an Adjustment.</p> <p>This component invokes the ATC1Adjustment Inbound Web Service using the C1AdjustmentRead Business Service.</p>

Component	Description
C1-AdjustmentUpdate	Used to update an Adjustment record.  This component invokes the ATC1Adjustment Inbound Web Service using the C1AdjustmentUpdate Business Service.
C1-PaymentEventBORead	Use to read for Pay Event record.  This component invokes the ATC1PayEventPhysicalBO Inbound Web Service using the C1-PayEventPhysicalBO Business Object.
C1-PaymentEventQuickAddAdd	Used to add a Payment Event Quick Add record.  This component invokes the ATC1PayEventPhysicalBO Inbound Web Service using the C1PaymentEventQuickAddAdd Business Service.
C1-StatementAdd	Used to create a Statement record.  This component invokes the ATC1Statement Inbound Web Service using C1StatementAdd Business Service.
C1-StatementDelete	Used to delete a Statement record.  This component invokes the ATC1Statement Inbound Web Service using C1StatementDelete Business Service.
C1-StatementRead	Used to read a Statement record.  This component invokes the ATC1Statement Inbound Web Service using C1StatementRead Business Service.
C1-StatementUpdate	Used to update a Statement record.  This component invokes the ATC1Statement Inbound Web Service using C1StatementUpdate Business Service.
C1-BillAdd	Used to add a Bill record.  This component invokes the ATC1Bill Inbound Web Service using the C1BillAdd Business Service.
C1-BillDelete	Used to delete a Bill record  This component invokes the ATC1Bill Inbound Web Service using the C1BillDelete Business Service.

Component	Description
C1-BillRead	Used to read a Bill record.  This component invokes the ATC1Bill Inbound Web Service using the C1BillRead Business Service.
C1-BillUpdate	Used to update a Bill record.  This component invokes the ATC1Bill Inbound Web Service using the C1BillUpdate Business Service.
C1-BillSegmentAdd	Used to add a Bill Segment record.  This component invokes the ATC1BillSegment Inbound Web Service using the C1BillSegmentAdd Business Service.
C1-BillSegmentRead	Used to read a Bill Segment record.  This component invokes the ATC1BillSegment Inbound Web Service using the C1BillSegmentRead Business Service.
C1-BillSegmentUpdate	Used to update a Bill Segment record.  This component invokes the ATC1BillSegment Inbound Web Service using the C1BillSegmentUpdate Business Service.
C1-BillableChargeAdd	Used to add a Billable Charge record.  This component invokes the ATC1BillableCharge Inbound Web Service using the C1BillableChargeAdd Business Service.
C1-BillableChargeRead	Used to read a Billable Charge record.  This component invokes the ATC1BillableCharge Inbound Web Service using the C1BillableChargeRead Business Service.
C1-BillableChargeUpdate	Used to update a Billable Charge record.  This component invokes the ATC1BillableCharge Inbound Web Service using the C1BillableChargeUpdate Business Service.
C1-CCBOneTimePaymentTaskAdd	Used to add a One Time Payment Task.  This component invokes the ATC1CCBOneTimePaymentTask Inbound Web Service using the C1-OneTimePaymentTask Business Object.

Component	Description
C1-CCBOneTimePaymentTaskRead	Used to read a One Time Payment Task.  This component invokes the ATC1CCBOneTimePaymentTask Inbound Web Service using the C1-OneTimePaymentTask Business Object.
C1-CCBOneTimePaymentTaskUpdate	Used to update a One Time Payment Task.  This component invokes the ATC1CCBOneTimePaymentTask Inbound Web Service using the C1-OneTimePaymentTask Business Object.
C1-DepositControlAdd	Used to add a Deposit Control record.  This component invokes the ATC1DepositControl Inbound Web Service using the C1DepositControlAdd Business Service.
C1-DepositControlRead	Used to read a Deposit Control.  This component invokes the ATC1DepositControl Inbound Web Service using the C1DepositControlRead Business Service.
C1-DepositControlUpdate	Used to update a Deposit Control record.  This component invokes the ATC1DepositControl Inbound Web Service using the C1DepositControlUpdate Business Service.
C1-FTRead	Used to read a Financial Transaction record.  This component invokes the ATC1FT Inbound Web Service using the C1FTRead Business Service.
C1-FTUpdate	Used to update a Financial Transaction record.  This component invokes the ATC1FinancialTransaction Inbound Web Service using the C1FTUpdate Business Service.
C1-MatchEventAdd	Used to add a Match Event record.  This component invokes the ATC1MatchEvent Inbound Web Service using the C1MatchEventAdd Business Service.
C1-MatchEventDelete	Used to delete a Match Event record.  This component invokes the ATC1MatchEvent Inbound Web Service using the C1MatchEventDelete Business Service.

Component	Description
C1-MatchEventRead	Used to read a Match Event record.  This component invokes the ATC1MatchEvent Inbound Web Service using the C1MatchEventRead Business Service.
C1-MatchEventUpdate	Used to update a Match Event record.  This component invokes the ATC1MatchEvent Inbound Web Service using the C1MatchEventUpdate Business Service.
C1-MultiCancelRebillRead	Used to read a Multi Cancel Rebill record.  This component invokes the ATC1MultiCancelRebill Inbound Web Service using the C1MultiCancelRebillRead Business Service.
C1-MultiCancelRebillUpdate	Used to update a Multi Cancel Rebill record.  This component invokes the ATC1MultiCancelRebill Inbound Web Service using the C1MultiCancelRebillUpdate Business Service.
C1-OffCycleBillGeneratorAdd	Used to add an Off Cycle Bill Generator record.  This component invokes the ATC1OffCycleBillGenerator Inbound Web Service using the C1OffCycleBillGeneratorAdd Business Service.
C1-OffCycleBillGeneratorDelete	Used to delete an Off Cycle Bill Generator record.  This component invokes the ATC1OffCycleBillGenerator Inbound Web Service using the C1OffCycleBillGeneratorDelete Business Service.
C1-OffCycleBillGeneratorRead	Used to read an Off Cycle Bill Generator record.  This component invokes the ATC1OffCycleBillGenerator Inbound Web Service using the C1OffCycleBillGeneratorRead Business Service.
C1-OffCycleBillGeneratorUpdate	Used to update an Off Cycle Bill Generator record.  This component invokes the ATC1OffCycleBillGenerator Inbound Web Service using the C1OffCycleBillGeneratorUpdate Business Service.
C1-PaymentAdd	Used to add a Payment record.  This component invokes the ATC1Payment Inbound Web Service using the C1PaymentAdd Business Service.



Component	Description
C1-PaymentDelete	Used to delete a Payment.  This component invokes the ATC1Payment Inbound Web Service using the C1PaymentDelete Business Service.
C1-PaymentRead	Used to read a Payment.  This component invokes the ATC1Payment Inbound Web Service using the C1PaymentRead Business Service.
C1-PaymentUpdate	Used to update a Payment record.  This component invokes the ATC1Payment Inbound Web Service using the C1PaymentUpdate Business Service.
C1-PaymentEventAdd	Used to add a Payment Event record.  This component invokes the ATC1PaymentEvent Inbound Web Service using the C1PaymentEventAdd Business Service.
C1-PaymentEventDelete	Used to delete a Payment Event record.  This component invokes the ATC1PaymentEvent Inbound Web Service using the C1PaymentEventDelete Business Service.
C1-PaymentEventRead	Used to read a Payment Event record.  This component invokes the ATC1PaymentEvent Inbound Web Service using the C1PaymentEventRead Business Service.
C1-PaymentEventUpdate	Used to update a Payment Event record.  This component invokes the ATC1PaymentEvent Inbound Web Service using the C1PaymentEventUpdate Business Service.
C1-PaymentEventQuickAddAdd	Used to add a Payment Event Quick Add record.  This component invokes the ATC1PaymentEventQuickAdd Inbound Web Service using the C1PaymentEventQuickAddAdd Business Service.
C1-PaymentQuickAddAdd	Used to add a Payment Quick Add record.  This component invokes the ATC1PaymentEventQuickAdd Inbound Web Service using the C1PaymentQuickAddAdd Business Service.

Component	Description
C1-PAResultAdd	Used to add a PA Request.  This component invokes the ATC1PAResult Inbound Web Service using the C1-PAResult Business Object.
C1-PAResultDelete	Used to delete a PA Request.  This component invokes the ATC1PAResult Inbound Web Service using the C1-PAResult Business Object.
C1-PAResultRead	Used to read a PA Request.  This component invokes the ATC1PAResult Inbound Web Service using the C1-PAResult Business Object.
C1-PAResultUpdate	Used to update a PA Request.  This component invokes the ATC1PAResult Inbound Web Service using the C1-PAResult Business Object.
C1-TenderControlAdd	Used to add a Tender Control record.  This component invokes the ATC1TenderControl Inbound Web Service using the C1TenderControlAdd Business Service.
C1-TenderControlRead	Used to read a Tender Control record.  This component invokes the ATC1TenderControl Inbound Web Service using the C1TenderControlRead Business Service.
C1-TenderControlUpdate	Used to update a Tender Control record.  This component invokes the ATC1TenderControl Inbound Web Service using the C1TenderControlUpdate Business Service.
C1-TenderCtrlSearchByAllUser	Used to search an open Tender Control record.  This component invokes the ATC1TenderCtrlSearchByAllUser Inbound Web Service using the C1TenderCtrlSearchByAllUser Business Service.

---

**General**

Component	Description
C1-CtrlCenSearchByAccountId	Used to search Control Central by Account ID.  This component invokes the ATC1CtrlCenSearchByAccountId Inbound Web Service using the C1CtrlCenSearchByAccountId Business Service.
C1-CtrlCenSearchByAddress	Used to search Control Central by Address.  This component invokes the ATC1CtrlCenSearchByAddress Inbound Web Service using the C1CtrlCenSearchByAddress Business Service.
C1-CtrlCenSearchByNameAddress	Used to search Control Central by Name and Address.  This component invokes the ATC1CtrlCenSearchByNameAddress Inbound Web Service using the C1CtrlCenSearchByNameAddress Business Service.
X1-RetrieveAlerts	Used to retrieve Alerts.  This component invokes the ATX1RetrieveAlerts Inbound Web Service using the X1RetrieveAlerts Business Service.
X1-RetrieveGlobalContexts	Used to retrieve Global Contexts.  This component invokes the ATX1RetrieveGlobalContexts Inbound Web Service using the X1RetrieveGlobalContexts Business Service.
C1-RetrieveActiveSA	Used to retrieve Service Agreements on Account.  This Component invokes the ATC1RetrieveActiveSa Inbound Web Service using the C1-RetrieveActiveSa Business Service.

## Master Configuration

Component	Description
X1-C2MMasterConfigurationAdd	<p>Used to create a Customer to Meter Master Configuration record.</p> <p>This component invokes the ATX1C2MMasterConfiguration Inbound Web Service using X1-C2MMasterConfiguration Business Object.</p>
X1-C2MMasterConfigurationRead	<p>Used to query an existing Customer to Meter Master Configuration record.</p> <p>This component invokes the ATX1C2MMasterConfiguration Inbound Web Service using the X1-C2MMasterConfiguration Business Object.</p>
C1-C360ConfigurationAdd	<p>This component can be used for adding a Billing and Usage Display Configuration record.</p> <p>This component invokes the Business Object "C1-C360Configuration" using the Inbound Web Service of ATC1C360Configuration.</p>
C1-C360ConfigurationRead	<p>This component can be used for reading a Billing and Usage Display Configuration record.</p> <p>This component invokes the Business Object "C1-C360Configuration" using the Inbound Web Service of ATC1C360Configuration.</p>
C1-C360ConfigurationUpdate	<p>This component can be used for reading a Billing and Usage Display Configuration record.</p> <p>This component invokes the Business Object "C1-C360Configuration" using the Inbound Web Service of ATC1C360Configuration.</p>
C1-DisplayIconOverrideConfigAdd	<p>This component can be used for adding a Display Icon Override Configuration record.</p> <p>This component invokes the Inbound Web Service "ATC1DisplayIconOverrideConfig" using the Business Object "C1-DisplayIconOverrideConfig".</p>
C1-DisplayIconOverrideConfigRead	<p>This component can be used for reading a Display Icon Override Configuration record.</p> <p>This component invokes the Inbound Web Service "ATC1DisplayIconOverrideConfig" using the Business Object "C1-DisplayIconOverrideConfig".</p>

Component	Description
C1-MigrationAssistantConfigAdd	<p>Used for adding a Migration Assistant Config record.</p> <p>This component invokes the ATC1MigrationAssistantConfig Inbound Web Service using the F1-MigrationAssistantConfig Business Object.</p>
C1-MigrationAssistantConfigDelete	<p>Used for deleting a Migration Assistant Config record.</p> <p>This component invokes the ATC1MigrationAssistantConfig Inbound Web Service using the F1-MigrationAssistantConfig Business Object.</p>
C1-MigrationAssistantConfigRead	<p>Used for reading a Migration Assistant Config record.</p> <p>This component invokes the ATC1MigrationAssistantConfig Inbound Web Service using the F1-MigrationAssistantConfig Business Object.</p>
C1-MigrationAssistantConfigUpdate	<p>Used for updating a Migration Assistant Config record.</p> <p>This component invokes the ATC1MigrationAssistantConfig Inbound Web Service using the F1-MigrationAssistantConfig Business Object.</p>
C1-DisplayIconOverrideConfigUpdate	<p>This component can be used for updating a Display Icon Override Configuration record.</p> <p>This component invokes the Inbound Web Service “ATC1DisplayIconOverrideConfig” using the Business Object “C1-DisplayIconOverrideConfig”.</p>
X1-C2MMasterConfigurationUpdate	<p>Used to update an existing Customer to Meter Master Configuration record.</p> <p>This component invokes the ATX1C2MMasterConfiguration Inbound Web Service using the X1-C2MMasterConfiguration Business Object.</p>
C1-RateEngineConfigAdd	<p>Used to create a Rate Engine Configuration record.</p> <p>This component invokes the C1-RateEngineConfig Business Object using the Inbound Web Service ATC1RateEngineConfig.</p>

Component	Description
C1-RateEngineConfigRead	Used to query an existing Rate Engine Configuration record.  This component invokes the C1-RateEngineConfig Business Object using the Inbound Web Service ATC1RateEngineConfig.
C1-RateEngineConfigUpdate	Used to update an existing a Rate Engine Configuration record.  This component invokes the C1-RateEngineConfig Business Object using Inbound Web Service ATC1RateEngineConfig.

### Initial Measurement Data

Component	Description
D1-IMDSeeder	Used to perform actions such as ADD, READ, UPDATE, and DELETE of an IMD Seeder.  This component invokes the D1-IMDSeeder Business Object using the ATD1IMDSeeder Inbound Web Service.
D1-ManualIMDInterval	Used to perform actions such as ADD, READ, UPDATE, and DELETE of Manual IMD Interval records.  This component invokes the D1-ManualIMDInterval Business Object using the ATD1ManualIMDInterval Inbound Web Service.
D1-ManualIMDScalar	Used to perform actions such as ADD, READ, UPDATE, and DELETE of Manual IMD Scalar records.  This component invokes the D1-ManualIMDScalar Business Object using the ATD1ManualIMDScalar Inbound Web Service.
D1-InitialLoadIMDInterval	Used to perform actions such as ADD, READ, UPDATE, and DELETE of Initial Load IMD Interval records.  This component invokes the D1-InitialLoadIMDInterval Business Object using the ATD1InitialLoadIMDInterval Inbound Web Service.

Component	Description
D1-InitialLoadIMDScalar	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE of Initial Load IMD Scalar records.</p> <p>This component invokes the D1-InitialLoadIMDScalar Business Object using the ATD1InitialLoadIMDScalar Inbound Web Service.</p>
D1-EstimationIMDInterval	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE of Estimation IMD Interval records.</p> <p>This component invokes the D1-EstimationIMDInterval Business Object using the ATD1EstimationIMDInterval Inbound Web Service.</p>
D1-EstimationIMDScalar	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE of Estimation IMD Scalar records.</p> <p>This component invokes the D1-EstimationIMDScalar Business Object using the ATD1EstimationIMDScalar Inbound Web Service.</p>

## Integration

Component	Description
D1-OngoingSyncRequestContact	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestContact.</p> <p>This component invokes the D1-Ongoing SyncRequestContact Business Object using the ATD1OngoingSyncRequestContact Inbound Web Service.</p>
D1-OngoingSyncRequestSP	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestSP.</p> <p>This component invokes the D1-OngoingSyncRequestSP Business Object using the ATD1OngoingSyncRequestSP Inbound Web Service.</p>
D1-OngoingSyncRequestDevice	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestDevice.</p> <p>This component invokes the D1-OngoingSyncRequestDevice Business Object using the ATD1OngoingSyncRequestDevice Inbound Web Service.</p>

Component	Description
D2-OngoingSyncRequestUS	<p data-bbox="964 216 1523 312">Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestUS.</p> <p data-bbox="964 346 1523 464">This component invokes the D2-OngoingSyncRequestUS Business Object using the ATD2OngoingSyncRequestUS Inbound Web Service.</p>
D1-OngoingSyncRequestDC	<p data-bbox="964 493 1523 590">Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestDC.</p> <p data-bbox="964 623 1523 741">This component invokes the D2-OngoingSyncRequestDC Business Object using the ATD1OngoingSyncRequestDC Inbound Web Service.</p>
D1-CompositeSyncRequestDC	<p data-bbox="964 770 1523 867">Used to perform actions such as ADD, READ, UPDATE, and DELETE a CompositeSyncRequestDC.</p> <p data-bbox="964 900 1523 1018">This component invokes the D1-CompositeSyncRequestDC Business Object using the ATD1CompositeSyncRequestDC Inbound Web Service.</p>
D1-OngoingSyncRequestMC	<p data-bbox="964 1047 1523 1144">Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestMC.</p> <p data-bbox="964 1178 1523 1295">This component invokes the D1-OngoingSyncRequestMC Business Object using the ATD1OngoingSyncRequestMC Inbound Web Service.</p>
D1-OngoingSyncReqScalarMtrRead	<p data-bbox="964 1325 1523 1421">Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncReqScalarMtrRead.</p> <p data-bbox="964 1455 1523 1572">This component invokes the D1-OngoingSyncReqScalarMtrRead Business Object using the ATD1OngoingSyncReqScalarMtrRead Inbound Web Service.</p>
D1-OngoingSyncRequestIE	<p data-bbox="964 1602 1523 1656">Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestIE.</p> <p data-bbox="964 1690 1523 1808">This component invokes the D1-OngoingSyncRequestIE Business Object using the ATD1OngoingSyncRequestIE Inbound Web Service.</p>



Component	Description
D2-UsageTran_ValSQHighList	<p>Used to perform actions such as READ on D2-UsageTransaction</p> <p>This component invokes the D2-UsageTransaction Business Object using the ATD2UsageTransaction Inbound Web Service.</p>
D2-UsageTran_ValUsgPeriod	<p>Used to perform actions such as READ on D2-UsageTransaction</p> <p>This component invokes the D2-UsageTransaction Business Object using the ATD2UsageTransaction Inbound Web Service.</p>
D2-InitialSyncRequestDynOpt	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a InitialSyncRequestDynOpt.</p> <p>This component invokes the D2-InitialSyncRequestDynOpt Business Object using the ATD2InitialSyncRequestDynOpt Inbound Web Service.</p>
D2-OngoingSyncRequestDynOpt	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestDynOpt.</p> <p>This component invokes the D2-OngoingSyncRequestDynOpt Business Object using the ATD2OngoingSyncRequestDynOpt Inbound Web Service.</p>
D2-InitialSyncRequestDynOptEvt	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a InitialSyncRequestDynOptEvt.</p> <p>This component invokes the D2-InitialSyncRequestDynOptEvt Business Object using the ATD2InitialSyncRequestDynOptEvt Inbound Web Service.</p>
D2-OngoingSyncRequestDynOptEvt	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestDynOptEvt.</p> <p>This component invokes the D2-OngoingSyncRequestDynOptEvt Business Object using the ATD2OngoingSyncRequestDynOptEvt Inbound Web Service.</p>

Component	Description
D2-CCBContractOptionTypeLookup	<p>Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBContractOptionTypeLookup.</p> <p>This component invokes the D2-CCBContractOptionTypeLookup Business Object using the ATD2CCBContractOptionTypeLookup Inbound Web Service.</p>
D1-HowToTranslateExternalValue	<p>Used to perform actions such as ADD, READ, UPDATE,and DELETE a HowToTranslateExternalValue.</p> <p>This component invokes the D1-HowToTranslateExternalValue Business Object using the ATD1HowToTranslateExternalValue Inbound Web Service.</p>
D1-CCBContactTypeLookup	<p>Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBContactTypeLookup.</p> <p>This component invokes the D1-CCBContactTypeLookup Business Object using the ATd1CCBContactTypeLookup Inbound Web Service.</p>
D1-CCBLifeSupSensitiveLdLookup	<p>Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBLifeSupSensitiveLdLookup.</p> <p>This component invokes the D1-CCBLifeSupSensitiveLdLookup Business Object using the ATD1CCBLifeSupSensitiveLdLookup Inbound Web Service.</p>
D2-CCBSATypeLookup	<p>Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBSATypeLookup.</p> <p>This component invokes the D2-CCBSATypeLookup Business Object using the ATD2CCBSATypeLookup Inbound Web Service.</p>
D2-CCBSAStatusLookup	<p>Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBSAStatusLookup.</p> <p>This component invokes the D2-CCBSAStatusLookup Business Object using the ATD2CCBSAStatusLookup Inbound Web Service.</p>

Component	Description
D1-InitialSyncRequestDevice	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a InitialSyncRequestDevice.</p> <p>This component invokes the D2-InitialSyncRequestDevice Business Object using the ATD1InitialSyncRequestDevice Inbound Web Service.</p>

## Itron Master Data

Component	Description
D8-InitialLoadIMDInterval	<p>Used to ADD Initial Measurement Interval Data for Itron OpenWay Adapter.</p> <p>This component invokes the D8-InitialLoadIMDInterval Business Object using the ATD8InitialLoadIMDInterval Inbound Web Service.</p>
D8-InitialLoadIMDScalar	<p>Used to ADD Initial Measurement Scalar Data for Itron OpenWay Adapter.</p> <p>This component invokes the D8-InitialLoadIMDScalar Business Object using the ATD8InitialLoadIMDScalar Inbound Web Service.</p>
D8-ScheduleRead	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Schedule Read for Itron.</p> <p>This component invokes the D8-ScheduleRead Business Object using the ATD8ScheduleRead Inbound Web Service.</p>

## Itron Admin Data

Component	Description
D8-ReadIntervalType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Itron - Contingency Read Type (Interval) outbound communication type.</p> <p>This component invokes the D8-ReadIntervalType Business Object using the ATD8ReadIntervalType Inbound Web Service.</p>
D8-ReadScalarType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE an Itron - Contingency Read Type (Scalar) outbound communication type.</p> <p>This component invokes the D8-ReadScalarType Business Object using the ATD8ReadScalarType Inbound Web Service.</p>
D8-ReadResultType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE an Itron - Contingency Read Result Type inbound communication type.</p> <p>This component invokes the D8-ReadResultType Business Object using the ATD8ReadResultType Inbound Web Service.</p>
D8-DeviceEventMappingLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Value for Itron - Device Event Mapping extendable Lookup.</p> <p>This component invokes the D8-DeviceEventMappingLookup Business Object using the ATD8DeviceEventMappingLookup Inbound Web Service.</p>
D8-HeadendUOMLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Value for Itron UOM Code to Standard UOM Mapping extendable Lookup.</p> <p>This component invokes the D8-HeadendUOMLookup Business Object using the ATD8HeadendUOMLookup Inbound Web Service.</p>
D8-ItronVersions	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Value for Itron - Versions Lookup extendable Lookup.</p> <p>This component invokes the D8-ItronVersions Business Object using the ATD8ItronVersions Inbound Web Service.</p>

Component	Description
D8-JobStatusLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an Itron OpenWay Job Status record.</p> <p>This component invokes the D8-JobStatusLookup Business Object using the ATD8JobStatusLookup Inbound Web Service.</p>
D8-PingByEndpointsMDRespType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an Itron OpenWay Ping By Endpoints MD Response Type record.</p> <p>This component invokes the D8-PingByEndpointsMDRespType Business Object using the ATD8PingByEndpointsMDRespType Inbound Web Service.</p>
D8-PingByEndpointsResponseType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an Itron OpenWay Ping By Endpoints Response Type record.</p> <p>This component invokes the D8-PingByEndpointsResponseType Business Object using the ATD8PingByEndpointsResponseType Inbound Web Service.</p>
D8-PingByEndpointsMultiDvcType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an Itron OpenWay Ping By Endpoints Multi Device Type record.</p> <p>This component invokes the D8-PingByEndpointsMultiDvcType Business Object using the ATD8PingByEndpointsMultiDvcType Inbound Web Service.</p>
D8-PingByEndpointsType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an Itron OpenWay Ping By Endpoints Type record.</p> <p>This component invokes the D8-PingByEndpointsType Business Object using the ATD8PingByEndpointsType Inbound Web Service.</p>
D8-AddMeterDefinitionsType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE an Add Meter Definitions Type for Itron.</p> <p>This component invokes the D8-AddMeterDefinitionsType Business Object using the ATD8AddMeterDefinitionsType Inbound Web Service.</p>

Component	Description
D8-AppGroupLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE an App Group Lookup for Itron.</p> <p>This component invokes the D8-AppGroupLookup Business Object using the ATD8AppGroupLookup Inbound Web Service.</p>
D8-DeregisterMeterType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE an Deregister Meter Type for Itron.</p> <p>This component invokes the D8-DeregisterMeterType Business Object using the ATD8DeregisterMeterType Inbound Web Service.</p>
D8-DetLoadSideVolBytMtrRsltTyp	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE an Detect Load Side Voltage By tMeter Result Type for Itron.</p> <p>This component invokes the D8-DetLoadSideVolBytMtrRsltTyp Business Object using the ATD8DetLoadSideVolBytMtrRsltTyp Inbound Web Service.</p>
D8-DetectLoadSideVoltageMtrTyp	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Detect Load Side Voltage Meter Type for Itron.</p> <p>This component invokes the D8-DetectLoadSideVoltageMtrTyp Business Object using the ATD8DetectLoadSideVoltageMtrTyp Inbound Web Service.</p>
D8-DisconnectMeterResultType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Disconnect Meter Result Type for Itron.</p> <p>This component invokes the D8-DisconnectMeterResultType Business Object using the ATD8DisconnectMeterResultType Inbound Web Service.</p>
D8-DisconnectMeterType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Disconnect Meter Type for Itron.</p> <p>This component invokes the D8-DisconnectMeterType Business Object using the ATD8DisconnectMeterType Inbound Web Service.</p>

Component	Description
D8-DisconnectSwitchStateLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Disconnect Switch State Lookup for Itron.</p> <p>This component invokes the D8-DisconnectSwitchStateLookup Business Object using the ATD8DisconnectSwitchStateLookup Inbound Web Service.</p>
D8-DvcStatusMappingLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Device Status Mapping Lookup for Itron.</p> <p>This component invokes the D8-DvcStatusMappingLookup Business Object using the ATD8DvcStatusMappingLookup Inbound Web Service.</p>
D8-FailureReasonLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Failure Reason Lookup for Itron.</p> <p>This component invokes the D8-FailureReasonLookup Business Object using the ATD8FailureReasonLookup Inbound Web Service.</p>
D8-IntStsCodeToCondMapLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a IntStsCodeToCondMapLookup for Itron.</p> <p>This component invokes the D8-IntStsCodeToCondMapLookup Business Object using the ATD8IntStsCodeToCondMapLookup Inbound Web Service.</p>
D8-InterrogateByGroupRsltType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Interrogate By Group Result Type for Itron.</p> <p>This component invokes the D8-InterrogateByGroupRsltType Business Object using the ATD8InterrogateByGroupRsltType Inbound Web Service.</p>
D8-InterrogateByGroupType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Interrogate By Group Type for Itron.</p> <p>This component invokes the D8-InterrogateByGroupType Business Object using the ATD8InterrogateByGroupType Inbound Web Service.</p>

Component	Description
D8-ReadDisconStBytMtrRsltType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Read Disconnect State By Meter Result Type for Itron.</p> <p>This component invokes the D8-ReadDisconStBytMtrRsltType Business Object using the ATD8ReadDisconStBytMtrRsltType Inbound Web Service.</p>
D8-ReadDisconStateByMtrType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Read Disconnect State By Meter Type for Itron.</p> <p>This component invokes the D8-ReadDisconStBytMtrType Business Object using the ATD8ReadDisconStBytMtrType Inbound Web Service.</p>
D8-ReconnectMeterResultType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Reconnect Meter Result Type for Itron.</p> <p>This component invokes the D8-ReconnectMeterResultType Business Object using the ATD8ReconnectMeterResultType Inbound Web Service.</p>
D8-ReconnectMeterType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Reconnect Meter Type for Itron.</p> <p>This component invokes the D8-ReconnectMeterType Business Object using the ATD8ReconnectMeterType Inbound Web Service.</p>
D8-ResultLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Result Lookup for Itron.</p> <p>This component invokes the D8-ResultLookup Business Object using the ATD8ResultLookup Inbound Web Service.</p>
D8-ScheduleReadType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Schedule Read Type for Itron.</p> <p>This component invokes the D8-ScheduleReadType Business Object using the ATD8ScheduleReadType Inbound Web Service.</p>



Component	Description
D8-RptSelfReadOptionLookup	Used to perform actions such as ADD, READ, UPDATE and DELETE a RptSelfReadOptionLookup for Itron.  This component invokes the D8-RptSelfReadOptionLookup Business Object using the ATD8RptSelfReadOptionLookup Inbound Web Service.
D8-AddMeterToHarness	Used to add a meter to the test harness.
D8-SetCommissionRequest	Used to set commission to True/False for a device.
D8-SetVoltage	Used to set voltage for a device.

## Landis + Gyr Admin Data

Component	Description
D3-InitMtReadByMtNumType	Used to perform actions such as ADD, READ, UPDATE and DELETE an Initiate Meter Read By Meter (Multispeak) outbound communication type.  This component invokes the D3-InitMtReadByMtNumType Business Object using the ATD3InitMtReadByMtNumType Inbound Web Service.
D3-LGMasterConfig	Used to perform actions such as ADD, READ, UPDATE and DELETE LGMasterConfig.  This component invokes the D3-LGMasterConfig Business Object using the ATD3LGMasterConfig Inbound Web Service.
D3-CIMMeterOnDemandReadDRType	Used to perform actions such as ADD, READ, UPDATE and DELETE CIMMeterOnDemandReadDRType.  This component invokes the D3-CIMMeterOnDemandReadDRType Business Object using the ATD3CIMMeterOnDemandReadDRType IWS.
D3-CIMAsyncReplyMRDRType	Used to perform actions such as ADD, READ, UPDATE and DELETE CIMAsyncReplyMRDRType.  This component invokes the D3-CIMAsyncReplyMRDRType Business Object using the ATD3CIMAsyncReplyMRDRType Inbound Web Service.

Component	Description
D3-IntStsCodeToCondMapLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a value for L+G Interval Status Code to Condition Mapping extendable lookup.</p> <p>This component invokes the D3-IntStsCodeToCondMapLookup Business Object using the ATD3IntStsCodeToCondMapLookup Inbound Web Service.</p>
D3-ReadingChgNotificationType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Reading Change Notification inbound communication type.</p> <p>This component invokes the D3-ReadingChgNotificationType Business Object using the ATD3ReadingChgNotificationType Inbound Web Service.</p>
D3-DeviceEventMappingLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Device Event Mapping Lookup record.</p> <p>This component invokes the D3-DeviceEventMappingLookup Business Object using the ATD3DeviceEventMappingLookup Inbound Web Service.</p>
D6-InitiateMtrRdByMtrIDDRType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a InitiateMtrRdByMtrIDDRType.</p> <p>This component invokes the D6-InitiateMtrRdByMtrIDDRType Business Object using the ATD6InitiateMtrRdByMtrIDDRType Inbound Web Service.</p>
D6-ReadingChgNotifDRType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Value for ReadingChgNotifDRType.</p> <p>This component invokes the D6-ReadingChgNotifDRType Business Object using the ATD6ReadingChgNotifDRType Inbound Web Service.</p>
D3-HeadendUOMLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Head End UOM Lookup record.</p> <p>This component invokes the D3-HeadendUOMLookup Business Object using the ATD3HeadendUOMLookup Inbound Web Service.</p>

Component	Description
D3-ConnectDisconStateChgNtfTyp	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Connect Disconnect State Change Notification Type record.</p> <p>This component invokes the D3-ConnectDisconStateChgNtfTyp Business Object using the ATD3ConnectDisconStateChgNtfTyp Inbound Web Service.</p>
D3-InitiateConnectDisconType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Initiate Connect Disconnect Type record.</p> <p>This component invokes the D3-InitiateConnectDisconType Business Object using the ATD3InitiateConnectDisconType Inbound Web Service.</p>
D3-LoadActionCodeLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Load Action Code Lookup record.</p> <p>This component invokes the D3-LoadActionCodeLookup Business Object using the ATD3LoadActionCodeLookup Inbound Web Service.</p>
D3-MeterAddNotificationMSType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Meter Add Notification MS Type record.</p> <p>This component invokes the D3-MeterAddNotificationMSType Business Object using the ATD3MeterAddNotificationMSType Inbound Web Service.</p>
D3-MtrRmvNotifMultiSpkType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Meter Remove Notification MultiSpk Type record.</p> <p>This component invokes the D3-MtrRmvNotifMultiSpkType Business Object using the ATD3MtrRmvNotifMultiSpkType Inbound Web Service.</p>
D3-ScheduleDemandResetRespTyp	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Schedule Demand Reset Resp Type record.</p> <p>This component invokes the D3-ScheduleDemandResetRespTyp Business Object using the ATD3ScheduleDemandResetRespTyp Inbound Web Service.</p>

Component	Description
D3-ScheduleDemandResetType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Schedule Demand Reset Type record.</p> <p>This component invokes the D3-ScheduleDemandResetType Business Object using the ATD3ScheduleDemandResetType Inbound Web Service.</p>
D3-AddMeterTo Harness	<p>Used to perform AddMeterToHarness to the LG test harness.</p> <p>This component invokes the D3-AddMeterToHarness Business Object using the ATD3AddMeterToHarness Inbound Web Service.</p>
D3-SetCommissionRequest	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a SetCommissionRequest Type record.</p> <p>This component invokes the D3-SetCommissionRequest using the ATD3SetCommissionRequest Inbound Web Service.</p>
D3-AddMeterToInventoryMSType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Add Meter To Inventory MS Type record.</p> <p>This component invokes the D3-AddMeterToInventoryMSType using the ATD3AddMeterToInventoryMSType Inbound Web Service.</p>
D3-MeterRetireNotificationType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a MeterRetireNotificationType record.</p> <p>This component invokes the D3-MeterRetireNotificationType using the ATD3MeterRetireNotificationType Inbound Web Service.</p>

## Landis + Gyr Master Data

Component	Description
D3-AddMeterToInventoryMultiSp	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Add Meter To Inventory Multi Sp record.</p> <p>This component invokes the D3-AddMeterToInventoryMultiSp using the ATD3AddMeterToInventoryMultiSp Inbound Web Service.</p>
D3-InitialLoadIMDInterval	<p>Used to ADD Initial Measurement Interval Data for L+G Adapter.</p> <p>This component invokes the D3-InitialLoadIMDInterval Business Object using the ATD3InitialLoadIMDInterval Inbound Web Service.</p>
D3-InitialLoadIMDScalar	<p>Used to ADD Initial Measurement Scalar Data for L+G Adapter.</p> <p>This component invokes the D3-InitialLoadIMDScalar Business Object using the ATD3InitialLoadIMDScalar Inbound Web Service.</p>
D3-MeterRetireNotification	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a MeterRetireNotification record.</p> <p>This component invokes the D3-MeterRetireNotification using the ATD3MeterRetireNotification Inbound Web Service.</p>

## Rates

Component	Description
C1-ApplyToAdd	<p>Used to add a calculation using Apply To Calculation rule.</p> <p>This component invokes the ATC1ApplyTo Inbound Web Service using the C1-ApplyTo Business Object.</p>
C1-ApplyToRead	<p>Used to read a calculation using Apply To Calculation rule.</p> <p>This component invokes the ATC1ApplyTo Inbound Web Service using the C1-ApplyTo Business Object.</p>

Component	Description
C1-ApplyToUpdate	<p>Used to update a calculation using Apply To Calculation rule.</p> <p>This component invokes the ATC1ApplyTo Inbound Web Service using the C1-ApplyTo Business Object.</p>
C1-ApplyToDelete	<p>Used to delete a Bill Factor TOU Value.</p> <p>This component invokes the ATC1BillFactorTOUValue Inbound Web Service using the C1-BillFactorTOUValAdd Business Object.</p>
C1-ApplyCCLChargesAdd	<p>Used to add calculation using Calculate Climate Change Levy and Relief Charges Calculation Rule.</p> <p>This component invokes the ATC1ApplyCCLCharges Inbound Web Service using the C1-ApplyCCLCharges Business Object.</p>
C1-ApplyCCLChargesRead	<p>Used to read calculation using Calculate Climate Change Levy and Relief Charges Calculation Rule.</p> <p>This component invokes the ATC1ApplyCCLCharges Inbound Web Service using the C1-ApplyCCLCharges Business Object.</p>
C1-ApplyCCLChargesUpdate	<p>Used to update calculation using Calculate Climate Change Levy and Relief Charges Calculation Rule.</p> <p>This component invokes the ATC1ApplyCCLCharges Inbound Web Service using the C1-ApplyCCLCharges Business Object.</p>
C1-ApplyCCLChargesDelete	<p>Used to delete calculation using Calculate Climate Change Levy and Relief Charges Calculation Rule.</p> <p>This component invokes the ATC1ApplyCCLCharges Inbound Web Service using the C1-ApplyCCLCharges Business Object.</p>
C1-ApplyVatToCrossRefChargeAdd	<p>Used to add a calculation using Apply VAT to Cross Referenced Charges calculation rule.</p> <p>This component invokes the ATC1ApplyTo Inbound Web Service using the C1-ApplyVatToCrossRefCharge Business Object.</p>

Component	Description
C1-ApplyVatToCrossRefChargeDelete	<p>Used to delete a calculation using Apply To Calculation rule.</p> <p>This component invokes the ATC1ApplyVatToCrossRefCharge Inbound Web Service using the C1-ApplyVatToCrossRefCharge Business Object.</p>
C1-ApplyVatToCrossRefChargeUpdate	<p>Used to update a calculation using Apply To Calculation rule.</p> <p>This component invokes the ATC1ApplyVatToCrossRefCharge Inbound Web Service using the C1-ApplyVatToCrossRefCharge Business Object.</p>
C1-ApplyVatToCrossRefChargeRead	<p>Used to read a calculation using Apply To Calculation Rule.</p> <p>This component invokes the ATC1ApplyVatToCrossRefCharge Inbound Web Service using the C1-ApplyVatToCrossRefCharge Business Object.</p>
C1-BillFactorAdd	<p>Used to add a Bill Factor Value.</p> <p>This component invokes the ATC1BillFactor Inbound Web Service using the C1-BillFactorPhysicalBO Physical Business Object.</p>
C1-BillFactorDelete	<p>Used to delete a Bill Factor Value.</p> <p>This component invokes the ATC1BillFactor Inbound Web Service using the C1-BillFactorPhysicalBO Physical Business Object.</p>
C1-BillFactorUpdate	<p>Used to update a Bill Factor Value.</p> <p>This component invokes the ATC1BillFactor Inbound Web Service using the C1-BillFactorPhysicalBO Physical Business Object.</p>
C1-BillFactorRead	<p>Used to read a Bill Factor Value.</p> <p>This component invokes the ATC1BillFactor Inbound Web Service using the C1-BillFactorPhysicalBO Physical Business Object.</p>
C1-BillFactorValueAdd	<p>Used to add a Bill Factor TOU Value.</p> <p>This component invokes the ATC1BillFactorValue Inbound Web Service using the C1-BillFactorValuePhysicalBO Physical Business Object.</p>

Component	Description
C1-BillFactorValueDelete	Used to delete a Bill Factor TOU Value.  This component invokes the ATC1BillFactorValue Inbound Web Service using the C1-BillFactorValuePhysicalBO Physical Business Object.
C1-BillFactorValueUpdate	Used to update a Bill Factor TOU Value.  This component invokes the ATC1BillFactorValue Inbound Web Service using the C1-BillFactorValuePhysicalBO Physical Business Object.
C1-BillFactorValueRead	Used to read a Bill Factor TOU Value.  This component invokes the ATC1BillFactorValue Inbound Web Service using the C1-BillFactorValuePhysicalBO Physical Business Object.
C1-BillFactorTOUValAdd	Used to add a Bill Factor TOU Value.  This component invokes the ATC1BillFactorTOUValue Inbound Web Service using the C1-BillFactorTOUValAdd Business Object.
C1-BillFactorTOUValDelete	Used to delete a Bill Factor TOU Value.  This component invokes the ATC1BillFactorTOUValue Inbound Web Service using the C1-BillFactorTOUValAdd Business Object.
C1-BillFactorTOUValUpdate	Used to update a Bill Factor TOU Value.  This component invokes the ATC1BillFactorTOUValue Inbound Web Service using the C1-BillFactorTOUValAdd Business Object.
C1-BillFactorTOUValRead	Used to read a Bill Factor TOU Value.  This component invokes the ATC1BillFactorTOUValue Inbound Web Service using the C1-BillFactorTOUValAdd Business Object.
C1-BillFactorIntervalValueAdd	Used to add a Bill Factor Interval Value.  This component invokes the ATC1IntervaValueSet Inbound Web Service using the C1-IntervalValueSetPhysicalBO Business Object.



Component	Description
C1-BillFactorIntervalValueDelete	Used to delete a Bill Factor Interval Value.  This component invokes the ATC1IntervaValueSet Inbound Web Service using the C1-IntervalValueSetPhysicalBO Business Object.
C1-BillFactorIntervalValueUpdate	Used to update a Bill Factor Interval Value.  This component invokes the ATC1IntervaValueSet Inbound Web Service using the C1-IntervalValueSetPhysicalBO Business Object.
C1-BillFactorIntervalValueRead	Used to read a Bill Factor Interval Value.  This component invokes the ATC1IntervaValueSet Inbound Web Service using the C1-IntervalValueSetPhysicalBO Business Object.
C1-CalculateServiceQuantityAdd	Used to add Calculate Service Quantity record.  This component invokes the ATC1CalculateServiceQuantity Inbound Web Service using the C1-CalculateServiceQuantity Business Object.
C1-CalculateServiceQuantityDelete	Used to delete a Calculate Service Quantity record.  This component invokes the ATC1CalculateServiceQuantity Inbound Web Service using the C1-CalculateServiceQuantity Business Object.
C1-CalculateServiceQuantityUpdate	Used to update a Calculate Service Quantity record.  This component invokes the ATC1CalculateServiceQuantity Inbound Web Service using the C1-CalculateServiceQuantity Business Object.
C1-CalculateServiceQuantityRead	Used to read a Calculate Service Quantity record.  This component invokes the ATC1CalculateServiceQuantity Inbound Web Service using the C1-CalculateServiceQuantity Business Object.
C1-CalculationGroupAdd	Used to add a Calculation Group.  This component invokes the ATC1CalculationGroup Inbound Web Service using the C1-CalcGroupPhysicalBO Physical Business Object.

Component	Description
C1-CalculationGroupDelete	Used to delete a Calculation Group.  This component invokes the ATC1CalculationGroup Inbound Web Service using the C1-CalcGroupPhysicalBO Physical Business Object.
C1-CalculationGroupRead	Used to read a Calculation Group.  This component invokes the ATC1CalculationGroup Inbound Web Service using the C1-CalcGroupPhysicalBO Physical Business Object.
C1-CalculationGroupUpdate	Used to update a Calculation Group.  This component invokes the ATC1CalculationGroup Inbound Web Service using the C1-CalcGroupPhysicalBO Physical Business Object.
C1-CalcLineCategoryAdd	Used to add a Calculation Line Category Type  This component invokes the ATC1CalcLineCat Inbound Web Service using the C1-CalcLineCatPhysicalBO Physical Business Object.
C1-CalcLineCategoryDelete	Used to delete a Calculation Line Category Type  This component invokes the ATC1CalcLineCat Inbound Web Service using the C1-CalcLineCatPhysicalBO Physical Business Object.
C1-CalcLineCategoryUpdate	Used to update a Calculation Line Category Type  This component invokes the ATC1CalcLineCat Inbound Web Service using the C1-CalcLineCatPhysicalBO Physical Business Object.
C1-CalcLineCategoryRead	Used to read a Calculation Line Category Type  This component invokes the ATC1CalcLineCat Inbound Web Service using the C1-CalcLineCatPhysicalBO Physical Business Object.
C1-CalcRuleEligibilityCriteriaAdd	Used to add a Calculation Rule Eligibility Criteria.  This component invokes the ATC1CalcRuleEICrt Inbound Web Service using the C1-CalcRuleEICrtPhysicalBO Physical Business Object.

Component	Description
C1-CalcRuleEligibilityCriteriaDelete	<p>Used to delete a Calculation Rule Eligibility Criteria.</p> <p>This component invokes the ATC1CalcRuleElCrt Inbound Web Service using the C1-CalcRuleElCrtPhysicalBO Physical Business Object.</p>
C1-CalcRuleEligibilityCriteriaUpdate	<p>Used to delete a Calculation Rule Eligibility Criteria.</p> <p>This component invokes the ATC1CalcRuleElCrt Inbound Web Service using the C1-CalcRuleElCrtPhysicalBO Physical Business Object.</p>
C1-CalcRuleEligibilityCriteriaRead	<p>Used to read a Calculation Rule Eligibility Criteria.</p> <p>This component invokes the ATC1CalcRuleElCrt Inbound Web Service using the C1-CalcRuleElCrtPhysicalBO Physical Business Object.</p>
C1-CalcRuleEligibilityCriteriaAdd	<p>Used to add a Calculation Rule Eligibility Criteria.</p> <p>This component invokes the ATC1CalcRuleReferredCalcGroup Inbound Web Service using the C1-CalcRuleElCrtPhysicalBO Physical Business Object.</p>
C1-CalcRuleEligibilityCriteriaDelete	<p>Used to delete a Calculation Rule Eligibility Criteria.</p> <p>This component invokes the ATC1CalcRuleReferredCalcGroup Inbound Web Service using the C1-CalcRuleElCrtPhysicalBO Physical Business Object.</p>
C1-CalcRuleEligibilityCriteriaUpdate	<p>Used to update a Calculation Rule Eligibility Criteria.</p> <p>This component invokes the ATC1CalcRuleReferredCalcGroup Inbound Web Service using the C1-CalcRuleElCrtPhysicalBO Physical Business Object.</p>
C1-CalcRuleEligibilityCriteriaRead	<p>Used to update a Calculation Rule Eligibility Criteria.</p> <p>This component invokes the ATC1CalcRuleReferredCalcGroup Inbound Web Service using the C1-CalcRuleElCrtPhysicalBO Physical Business Object.</p>
C1-CalculateFinalValueAdd	<p>Used to add a calculation using Calculate final reading values Calculation Rule.</p> <p>This component invokes the ATC1CalculateFinalValue Inbound Web Service using the C1-CalculateFinalValue Business Object.</p>

Component	Description
C1-CalculateFinalValueDelete	Used to delete a calculation using Calculate final reading values Calculation Rule.  This component invokes the ATC1CalculateFinalValue Inbound Web Service using the C1-CalculateFinalValue Business Object.
C1-CalculateFinalValueUpdate	Used to delete a calculation using Calculate final reading values Calculation Rule.  This component invokes the ATC1CalculateFinalValue Inbound Web Service using the C1-CalculateFinalValue Business Object.
C1-CalculateFinalValueDelete	Used to delete a calculation using Calculate final reading values Calculation Rule.  This component invokes the ATC1CalculateFinalValue Inbound Web Service using the C1-CalculateFinalValue Business Object.
C1-CalcMiscellaneousChargeAdd	Used to add a calculation using Miscellaneous Charges Calculation Rule.  This component invokes the ATC1CalculateMiscellaneousCharg Inbound Web Service using the C1-CalculateMiscellaneousCharg Business Object.
C1-CalcMiscellaneousChargeDelete	Used to delete a calculation using Miscellaneous Charges Calculation Rule.  This component invokes the ATC1CalculateMiscellaneousCharg Inbound Web Service using the C1-CalculateMiscellaneousCharg Business Object.
C1-CalcMiscellaneousChargeUpdate	Used to delete a calculation using Miscellaneous Charges Calculation Rule.  This component invokes the ATC1CalculateMiscellaneousCharg Inbound Web Service using the C1-CalculateMiscellaneousCharg Business Object.
C1-CalcMiscellaneousChargeRead	Used to read a calculation using Miscellaneous Charges Calculation Rule.  This component invokes the ATC1CalculateMiscellaneousCharg Inbound Web Service using the C1-CalculateMiscellaneousCharg Business Object.

Component	Description
C1-CopySQFromMasterBillSegmentAdd	<p>Used to read a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CopySQFromMasterBillSegment Inbound Web Service using the C1-CopySQFromMasterBillSegment Business Object.</p>
C1-CopySQFromMasterBillSegment Delete	<p>Used to delete a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CopySQFromMasterBillSegment Inbound Web Service using the C1-CopySQFromMasterBillSegment Business Object.</p>
C1-CopySQFromMasterBillSegment Update	<p>Used to update a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CopySQFromMasterBillSegment Inbound Web Service using the C1-CopySQFromMasterBillSegment Business Object.</p>
C1-CopySQFromMasterBillSegmentRead	<p>Used to read a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CopySQFromMasterBillSegment Inbound Web Service using the C1-CopySQFromMasterBillSegment Business Object.</p>
C1-CalcMiscellaneousChargeDelete	<p>Used to delete a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CalculateMiscellaneousCharg Inbound Web Service using the C1-CalculateMiscellaneousCharg Business Object.</p>
C1-CalcMiscellaneousChargeUpdate	<p>Used to delete a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CalculateMiscellaneousCharg Inbound Web Service using the C1-CalculateMiscellaneousCharg Business Object.</p>
C1-CalcMiscellaneousChargeRead	<p>Used to read a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CalculateMiscellaneousCharg Inbound Web Service using the C1-CalculateMiscellaneousCharg Business Object.</p>

Component	Description
C1-CopySQFromMasterBillSegmentAdd	<p>Used to read a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CopySQFromMasterBillSegment Inbound Web Service using the C1-CopySQFromMasterBillSegment Business Object.</p>
C1-CopySQFromMasterBillSegment Delete	<p>Used to delete a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CopySQFromMasterBillSegment Inbound Web Service using the C1-CopySQFromMasterBillSegment Business Object.</p>
C1-CopySQFromMasterBillSegment Update	<p>Used to update a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CopySQFromMasterBillSegment Inbound Web Service using the C1-CopySQFromMasterBillSegment Business Object.</p>
C1-CopySQFromMasterBillSegment Read	<p>Used to read a calculation using Miscellaneous Charges Calculation Rule.</p> <p>This component invokes the ATC1CopySQFromMasterBillSegment Inbound Web Service using the C1-CopySQFromMasterBillSegment Business Object.</p>
C1-DetermineDemandValueToPrice Add	<p>Used to add a calculation using Determine Demand Value To Price Calculation Rule.</p> <p>This component invokes the ATC1DetermineDemandValueToPrice Inbound Web Service using the C1-DetermineDemandValueToPrice Business Object.</p>
C1-DetermineDemandValueToPrice Delete	<p>Used to delete a calculation using Determine Demand Value To Price Calculation Rule.</p> <p>This component invokes the ATC1DetermineDemandValueToPrice Inbound Web Service using the C1-DetermineDemandValueToPrice Business Object.</p>
C1-DetermineDemandValueToPrice Update	<p>Used to update a calculation using Determine Demand Value To Price Calculation Rule.</p> <p>This component invokes the ATC1DetermineDemandValueToPrice Inbound Web Service using the C1-DetermineDemandValueToPrice Business Object.</p>

Component	Description
C1-DetermineDemandValueToPriceRead	<p>Used to read a calculation using Determine Demand Value To Price Calculation Rule.</p> <p>This component invokes the ATC1DetermineDemandValueToPrice Inbound Web Service using the C1-DetermineDemandValueToPrice Business Object.</p>
C1-FlatChargeAdd	<p>Used to add a calculation using Flat Charge calculation rule.</p> <p>This component invokes the ATC1FlatCharge Inbound Web Service using the C1-FlatCharge Business Object.</p>
C1-FlatChargeDelete	<p>Used to delete a calculation using Flat Charge calculation rule.</p> <p>This component invokes the ATC1FlatCharge Inbound Web Service using the C1-FlatCharge Business Object.</p>
C1-FlatChargeUpdate	<p>Used to delete a calculation using Flat Charge calculation rule.</p> <p>This component invokes the ATC1FlatCharge Inbound Web Service using the C1-FlatCharge Business Object.</p>
C1-FlatChargeRead	<p>Used to delete a calculation using Flat Charge calculation rule.</p> <p>This component invokes the ATC1FlatCharge Inbound Web Service using the C1-FlatCharge Business Object.</p>
C1-GetSubUsageRequestSQAdd	<p>Used to add a calculation using Get Sub-Usage Request SQ Calculation Rule.</p> <p>This component invokes the ATC1GetSubUsageRequestSQ Inbound Web Service using the C1-GetSubUsageRequestSQ Business Object.</p>
C1-GetSubUsageRequestSQDelete	<p>Used to delete a calculation using Get Sub-Usage Request SQ Calculation Rule.</p> <p>This component invokes the ATC1GetSubUsageRequestSQ Inbound Web Service using the C1-GetSubUsageRequestSQ Business Object.</p>

Component	Description
C1-GetSubUsageRequestSQUpdate	<p>Used to update a calculation using Get Sub-Usage Request SQ Calculation Rule.</p> <p>This component invokes the ATC1GetSubUsageRequestSQ Inbound Web Service using the C1-GetSubUsageRequestSQ Business Object.</p>
C1-GetSubUsageRequestSQRead	<p>Used to read a calculation using Get Sub-Usage Request SQ Calculation Rule.</p> <p>This component invokes the ATC1GetSubUsageRequestSQ Inbound Web Service using the C1-GetSubUsageRequestSQ Business Object.</p>
C1-ItemTypeChargeAdd	<p>Used to read a calculation using Item Type Charge Calculation rule.</p> <p>This component invokes the ATC1ItemTypeCharge Inbound Web Service using the C1-ItemType Business Object.</p>
C1-ItemTypeChargeDelete	<p>Used to delete a calculation using Item Type Charge Calculation rule.</p> <p>This component invokes the ATC1ItemTypeCharge Inbound Web Service using the C1-ItemType Business Object.</p>
C1-ItemTypeChargeUpdate	<p>Used to update a calculation using Item Type Charge Calculation rule.</p> <p>This component invokes the ATC1ItemTypeCharge Inbound Web Service using the C1-ItemType Business Object.</p>
C1-ItemTypeChargeRead	<p>Used to read a calculation using Item Type Charge Calculation rule.</p> <p>This component invokes the ATC1ItemTypeCharge Inbound Web Service using the C1-ItemType Business Object.</p>
C1-MathAdd	<p>Used to add a calculation using Math Calculation rule.</p> <p>This component invokes the ATC1Math Inbound Web Service using the C1-Math Business Object.</p>
C1-MathDelete	<p>Used to delete a calculation using Math Calculation rule.</p> <p>This component invokes the ATC1Math Inbound Web Service using the C1-Math Business Object.</p>



Component	Description
C1-MathUpdate	<p>Used to update a calculation using Math Calculation rule.</p> <p>This component invokes the ATC1Math Inbound Web Service using the C1-Math Business Object.</p>
C1-MathRead	<p>Used to read a calculation using Math Calculation rule.</p> <p>This component invokes the ATC1Math Inbound Web Service using the C1-Math Business Object.</p>
C1-MaximumAdd	<p>Used to read a calculation using maximum Calculation rule.</p> <p>This component invokes the ATC1Maximum Inbound Web Service using the C1-Maximum Business Object.</p>
C1-MaximumDelete	<p>Used to read a calculation using maximum Calculation rule.</p> <p>This component invokes the ATC1Maximum Inbound Web Service using the C1-Maximum Business Object.</p>
C1-MaximumUpdate	<p>Used to update a calculation using maximum Calculation rule.</p> <p>This component invokes the ATC1Maximum Inbound Web Service using the C1-Maximum Business Object.</p>
C1-MaximumUpdate	<p>Used to delete a calculation using Maximum Calculation rule.</p> <p>This component invokes the ATC1Maximum Inbound Web Service using the C1-Maximum Business Object.</p>
C1-MinimumAdd	<p>Used to add a calculation using Minimum Calculation rule.</p> <p>This component invokes the ATC1Minimum Inbound Web Service using the C1-Minimum Business Object.</p>
C1-MinimumDelete	<p>Used to delete a calculation using Minimum Calculation rule.</p> <p>This component invokes the ATC1Minimum Inbound Web Service using the C1-Minimum Business Object.</p>

Component	Description
C1-MinimumUpdate	<p>Used to update a calculation using Minimum Calculation rule.</p> <p>This component invokes the ATC1Minimum Inbound Web Service using the C1-Minimum Business Object.</p>
C1-MinimumRead	<p>Used to read a calculation using Minimum Calculation rule.</p> <p>This component invokes the ATC1Minimum Inbound Web Service using the C1-Minimum Business Object.</p>
C1-RateCheck	<p>Used for Rate Checking.</p> <p>This component invokes the ATC1RateCheck Inbound Web Service using the C1-RateApplication Business Service.</p>
C1-RateComponentAdd	<p>Used to add a Rate Component record.</p> <p>This component invokes the ATC1RateComponent Inbound Web Service using the C1-RateComponentPhysicalBO Physical Business Object.</p>
C1-RateComponentDelete	<p>Used to delete a Rate Component record.</p> <p>This component invokes the ATC1RateComponent Inbound Web Service using the C1-RateComponentPhysicalBO Physical Business Object.</p>
C1-RateComponentRead	<p>Used to read a Rate Component record.</p> <p>This component invokes the ATC1RateComponent Inbound Web Service using the C1-RateComponentPhysicalBO Physical Business Object.</p>
C1-RateComponentUpdate	<p>Used to update a Rate Component record.</p> <p>This component invokes the ATC1RateComponent Inbound Web Service using the C1-RateComponentPhysicalBO Physical Business Object.</p>
C1-RateScheduleV1Add	<p>Used to add a Rate Schedule V1 record.</p> <p>This component invokes the ATC1RateScheduleV1 Inbound Web Service using the C1-RateSchedulePhysicalBO Physical Business Object.</p>

Component	Description
C1-RateScheduleV1Delete	Used to delete a Rate Schedule V1 record.  This component invokes the ATC1RateScheduleV1 Inbound Web Service using the C1-RateSchedulePhysicalBO Physical Business Object.
C1-RateScheduleV1Read	Used to read a Rate Schedule V1 record.  This component invokes the ATC1RateScheduleV1 Inbound Web Service using the C1-RateSchedulePhysicalBO Physical Business Object.
C1-RateScheduleV1Update	Used to update a Rate Schedule V1 record  This component invokes the ATC1RateScheduleV1 Inbound Web Service using the C1-RateSchedulePhysicalBO Physical Business Object.
C1-RateScheduleV2Add	Used to add a Rate Schedule V1 record.  This component invokes the ATC1RateScheduleV2 Inbound Web Service using the C1-RateScheduleV2 Business Object.
C1-RateScheduleV2Read	Used to read a Rate Schedule V1 record.  This component invokes the ATC1RateScheduleV2 Inbound Web Service using the C1-RateScheduleV2 Business Object.
C1-RateScheduleV2Update	Used to update a Rate Schedule V1 record.  This component invokes the ATC1RateScheduleV2 Inbound Web Service using the C1-RateScheduleV2 Business Object.
C1-RateVersionAdd	Used to add a Rate Version record.  This component invokes the ATC1RateVersion Inbound Web Service using the C1-RateVersionPhysicalBO Physical Business Object.
C1-RateVersionDelete	Used to delete a Rate Version record.  This component invokes the ATC1RateVersion Inbound Web Service using the C1-RateVersionPhysicalBO Physical Business Object.
C1-RateVersionRead	Used to read a Rate Version record.  This component invokes the ATC1RateVersion Inbound Web Service using the C1-RateVersionPhysicalBO Physical Business Object.

Component	Description
C1-RateVersionUpdate	Used to update a Rate Version record.  This component invokes the ATC1RateVersion Inbound Web Service using the C1-RateVersionPhysicalBO Physical Business Object.
C1-ServiceQuantityAdd	Used to add a Service Quantity charge record.  This component invokes the ATC1ServiceQuantity Inbound Web Service using the Business Object.
C1-ServiceQuantityDelete	Used to delete a Service Quantity charge record.  This component invokes the ATC1ServiceQuantity Inbound Web Service using the Business Object.
C1-ServiceQuantityRead	Used to read a Service Quantity charge record.  This component invokes the ATC1ServiceQuantity Inbound Web Service using the Business Object.
C1-ServiceQuantityUpdate	Used to update a Service Quantity charge record.  This component invokes the ATC1ServiceQuantity Inbound Web Service using the Business Object.
C1-SimpleSummaryAdd	Used to add a Simple Summary charge record.  This component invokes the ATC1SimpleSummary Inbound Web Service using the Business Object.
C1-SimpleSummaryDelete	Used to delete a Simple Summary charge record.  This component invokes the ATC1SimpleSummary Inbound Web Service using the Business Object.
C1-SimpleSummaryRead	Used to read a Simple Summary charge record.  This component invokes the ATC1SimpleSummary Inbound Web Service using the Business Object.
C1-SimpleSummaryUpdate	Used to update a Simple Summary charge record.  This component invokes the ATC1SimpleSummary Inbound Web Service using the Business Object.
C1-SteppedSQAdd	Used to add a Stepped SQ charge record.  This component invokes the ATC1SteppedSQ Inbound Web Service using the Business Object.
C1-SteppedSQDelete	Used to add read a Stepped SQ charge record.  This component invokes the ATC1SteppedSQ Inbound Web Service using the Business Object.

Component	Description
C1-SteppedSQRead	Used to read a Stepped SQ charge record.  This component invokes the ATC1SteppedSQ Inbound Web Service using the Business Object.
C1-SteppedSQUpdate	Used to update a Stepped SQ charge record.  This component invokes the ATC1SteppedSQ Inbound Web Service using the Business Object.
C1-SummaryAdd	Used to add a Summary charge record.  This component invokes the ATC1Summary Inbound Web Service using the Business Object.
C1-SummaryDelete	Used to delete a Summary charge record.  This component invokes the ATC1Summary Inbound Web Service using the Business Object.
C1-SummaryRead	Used to read a Summary charge record.  This component invokes the ATC1Summary Inbound Web Service using the Physical Business Object.
C1-SummaryUpdate	Used to update a Summary charge record.  This component invokes the ATC1Summary Inbound Web Service using the Business Object.

## S MDF Admin Data

Component	Description
D2-SubIntAdjustmentVEE	Performs adjustments to consumption; the changes to consumption will be validated against the readings contained prior to and subsequent to the change made. This component invokes the D2-SubIntAdjustmentVEE Business Object using the ATD2SubIntAdjustmentVEE Inbound Web Service.
D1-VEEGroup	Used to create a VEE Group.  This component invokes the D1-VEEGroup Business Object using the ATD1VEEGroup Inbound Web Service.

Component	Description
D2-NegativeConsumptionCheck	<p>Used to create a Negative-Consumption Check VEE Rule.</p> <p>This component invokes the D2-NegativeConsumptionCheck Business Object using the ATD2NegativeConsumptionCheck Inbound Web Service.</p>
D2-RegisterMultiplierCheck	<p>Used to create a Multiplier Check VEE Rule.</p> <p>This component invokes the D2-RegisterMultiplierCheck Business Object using the ATD2RegisterMultiplierCheck Inbound Web Service.</p>
D2-IntervalReplacementRule	<p>Used to create an IntervalReplacementRule VEE rule.</p> <p>This component invokes the D2-IntervalReplacementRule Business Object using the ATD2IntervalReplacementRule Inbound Web Service.</p>
D2-IntervalSpikeCheck	<p>Used to create an IntervalSpikeCheck VEE rule.</p> <p>This component invokes the D2-IntervalSpikeCheck Business Object using the ATD2IntervalSpikeCheck Inbound Web Service.</p>
D2-ScalarReplacementRule	<p>Used to create a ScalarReplacementRule VEE rule.</p> <p>This component invokes the D2-ScalarReplacementRule Business Object using the ATD2ScalarReplacementRule Inbound Web Service.</p>
D1-VEERuleSuccessTermination	<p>Used to create a VEERuleSuccessTermination VEE rule.</p> <p>This component invokes the D1-VEERuleSuccessTermination Business Object using the ATD1VEERuleSuccessTermination Inbound Web Service.</p>
D2-IntervalAveragingEstimation	<p>Describes Interval Averaging Estimation.</p> <p>This component invokes the D2-IntervalAveragingEstimation Business Object using the ATD2IntervalAveragingEstimation Inbound Web Service.</p>
D2-IntervalProfileEstimation	<p>Describes Interval Profile Estimation.</p> <p>This component invokes the D2-IntervalProfileEstimation Business Object using the ATD2IntervalProfileEstimation Inbound Web Service.</p>

Component	Description
D2-IntervalSizeValidation	<p>Describes Interval Size Validation.</p> <p>This component invokes the D2-IntervalSizeValidation Business Object using the ATD2IntervalSizeValidation Inbound Web Service.</p>
D2-RaiseMissingQuantityExcp	<p>Describes Raise Missing Quantity Exception.</p> <p>This component invokes the D2-RaiseMissingQuantityExcp Business Object using the ATD2RaiseMissingQuantityExcp Inbound Web Service.</p>
D1-VEERuleReferredVEEGroup	<p>Calls the VEE processor to execute the rules for the VEE group configured on the rule.</p> <p>This component invokes the D1-VEERuleReferredVEEGroup Business Object using the ATD1VEERuleReferredVEEGroup Inbound Web Service.</p>
D2-SSMeterReadTaskType	<p>Holds the default values such as measurement condition, service provider, and data source used in self-service meter read creation. To Do type and role, if specified will be used when reporting errors that occur during IMD creation.</p> <p>This component invokes the D2-SSMeterReadTaskType Business Object using the ATD2SSMeterReadTaskType Inbound Web Service.</p>
D2-ProlongedEstimationCheck	<p>Describes ProlongedEstimationCheck.</p> <p>This component invokes the D2-ProlongedEstimationCheck Business Object using the ATD2 ProlongedEstimationCheck Inbound Web Service.</p>
D1-DuplicateIMDCheck	<p>Checks whether the current IMD is a duplicate of one already received for the same measuring component.</p> <p>This component produces a VEE exception of the type and severity defined on the rule when it is configured.</p> <p>It invokes the D1-DuplicateIMDCheck Business Object using the ATD1DuplicateIMDCheck Inbound Web Service.</p>
D1-VEERuleGroupFactor	<p>Describes the VEE Rule group factor.</p> <p>This component invokes the D1-VEERuleGroupFactor Business Object using the ATD1VEERuleGroupFactor Inbound Web Service.</p>

Component	Description
D2-FinalMeasurementValidation	<p>Describes the Final Measurement Validation.</p> <p>This component invokes the D2-FinalMeasurementValidation Business Object using the ATD2FinalMeasurementValidation Inbound Web Service.</p>
D2-ScalarProfileEstimation	<p>Used to create a ScalarProfileEstimation VEE Rule.</p> <p>This component invokes the D2-ScalarProfileEstimation Business Object using the ATD2ScalarProfileEstimation Inbound Web Service.</p>
D2-SumCheck	<p>Used to create a SumCheck VEE Rule.</p> <p>This component invokes the D2-SumCheck Business Object using the ATD2SumCheck Inbound Web Service.</p>
D2-ScalarCalcFromInterval	<p>Describes Scalar Calculation from Interval.</p> <p>This component invokes the D2-ScalarCalcFromInterval Business Object using the ATD2ScalarCalcFromInterval Inbound Web Service.</p>
D2-ScalarEstimation	<p>Describes the Describes Scalar Estimation VEE Rule.</p> <p>This component invokes the D2-ScalarEstimation Business Object using the ATD2ScalarEstimation Inbound Web Service.</p>
D2-UOMCheck	<p>Used to create UOM Check VEE rule.</p> <p>This component invokes the D2-UOMCheck Business Object using the ATD2UOMCheck Inbound Web Service.</p>
D2-ZeroConsumptionCheck	<p>Used to create Zero Consumption Check VEE rule.</p> <p>This component invokes the D2-ZeroConsumptionCheck Business Object using the ATD2ZeroConsumptionCheck Inbound Web Service.</p>
D1-VEERuleExceptionHandler	<p>Used to create a VEERuleExceptionHandler VEE Rule.</p> <p>This component invokes the D1-VEERuleExceptionHandler Business Object using the ATD1VEERuleExceptionHandler Inbound Web Service.</p>



Component	Description
D2-EnsureIMDExistsForSibling	<p>Used to create a EnsureIMDExistsForSibling VEE rule.</p> <p>This component invokes the D2-EnsureIMDExistsForSibling Business Object using the ATD2EnsureIMDExistsForSibling Inbound Web Service.</p>
D2-IntervalAdjustmentFrmScalar	<p>Used to create a IntervalAdjustmentFrmScalar VEE rule.</p> <p>This component invokes the D2-IntervalAdjustmentFrmScalar Business Object using the ATD2IntervalAdjustmentFrmScalar Inbound Web Service.</p>
D2-IntervalInterpolationEst	<p>Used to create an IntervalInterpolationEst VEE rule.</p> <p>This component invokes the D2-IntervalInterpolationEst Business Object using the ATD2IntervalInterpolationEst Inbound Web Service.</p>
D2-GetSubtractiveInterval	<p>Allows the configuration of subtractive interval data retrieval during usage transaction processing. The rule records service quantities per service point and measuring component - which means that subtractive interval curves for different measuring components.</p> <p>This component invokes the D2-GetSubtractiveInterval Business Object using the ATD2GetSubtractiveInterval Inbound Web Service.</p>
D1-MeterReadDownloadActType	<p>Used to create a MeterReadDownloadActType Activity Type.</p> <p>This component invokes the D1-MeterReadDownloadActType Business Object using the ATD1MeterReadDownloadActType Inbound Web Service.</p>
D1-PairedEventLastDvcEvtType	<p>Used to create a PairedEventLastDvcEvtType Device Event Type.</p> <p>This component invokes the D1-PairedEventLastDvcEvtType Business Object using the ATD1PairedEventLastDvcEvtType Inbound Web Service.</p>

Component	Description
D1-StandardDeviceEventType	<p>Used to create a StandardDeviceEventType Device Event Type.</p> <p>This component invokes the D1-StandardDeviceEventType Business Object using the ATD1StandardDeviceEventType Inbound Web Service.</p>
D1-UTCorrectnPrcessrActvtyType	<p>Defines the activity BO to use in the creation of a Usage Transaction Correction Processor. This component also defines the general category of these activities as a Correction Processor.</p> <p>The component invokes the D1-UTCorrectnPrcessrActvtyType Business Object using the ATD1UTCorrectnPrcessrActvtyType Inbound Web Service.</p>
D1-RemoteConnectType	<p>Describes configuration parameters required for the Remote Connect command activity, including automated retry and command time-out options.</p> <p>This component allows the definition of a Service Issue Monitor Type resulting in the creation of a Service Issue Monitor of the configured type if a Remote Connect command activity has failed.</p> <p>The component invokes the D1-RemoteConnectType Business Object using the ATD1RemoteConnectType Inbound Web Service.</p>
D1-PairedEventFirstDvcEvtType	<p>Describes the Device Event Type - Paired Event (First).</p> <p>This component invokes the D1-PairedEventFirstDvcEvtType Business Object using the ATD1PairedEventFirstDvcEvtType Inbound Web Service.</p>
D1-DeviceWithDurationActType	<p>Describes the Device Activity with Duration Type.</p> <p>This component invokes the D1-DeviceWithDurationActType Business Object using the ATD1DeviceWithDurationActType Inbound Web Service.</p>
D2-SubMeasurementAggType	<p>Describes the Sub Measurement Aggregator Type.</p> <p>This component invokes the D2-SubMeasurementAggType Business Object using the ATD2SubMeasurementAggType Inbound Web Service.</p>

Component	Description
D2-MasterMsmtAggregatorType	<p>Describes the Master Measurement Aggregator Type.</p> <p>This component invokes the D2-MasterMsmtAggregatorType Business Object using the ATD2MasterMsmtAggregatorType Inbound Web Service.</p>
D2-ActivityTypeAggDimScanner	<p>Describes the Aggregator Dimension Scanner Activity Type.</p> <p>This component invokes the D2-ActivityTypeAggDimScanner Business Object using the ATD2ActivityTypeAggDimScanner Inbound Web Service.</p>
D2-AggregatorType	<p>Used to create an AggregatorType Measuring Component Type.</p> <p>This component invokes the D2-AggregatorType Business Object using the ATD2AggregatorType Inbound Web Service.</p>
D1-IntervalPriceType	<p>Used to create a IntervalPriceType.</p> <p>This component invokes the D1-IntervalPriceType Business Object using the ATD1IntervalPriceType Inbound Web Service.</p>
D1-IntervalChannelTypePhysical	<p>Used to create a IntervalChannelTypePhysical.</p> <p>This component invokes the D1-IntervalChannelTypePhysical Business Object using the ATD1IntervalChannelTypePhysical Inbound Web Service.</p>
D1-MeasurementCycleSchedule	<p>Used to create a MeasurementCycleSchedule.</p> <p>This component invokes the D1-MeasurementCycleSchedule Business Object using the ATD1MeasurementCycleSchedule Inbound Web Service.</p>
D1-ReaderRemarkType	<p>Used to create a ReaderRemarkType.</p> <p>This component invokes the D1-ReaderRemarkType Business Object using the ATD1ReaderRemarkType Inbound Web Service.</p>
D1-ServiceIssueMonitorType	<p>Used to create a ServiceIssueMonitorType.</p> <p>This component invokes the D1-ServiceIssueMonitorType Business Object using the ATD1ServiceIssueMonitorType Inbound Web Service.</p>

Component	Description
D2-MsrmtQuantityAggScannerType	Used to create a MsrmtQuantityAggScannerType.  This component invokes the D2-MsrmtQuantityAggScannerType Business Object using the ATD2MsrmtQuantityAggScannerType Inbound Web Service.
D2-TOUGroup	Used to create a TOUGroup.  This component invokes the D2-TOUGroup Business Object using the ATD2TOUGroup Inbound Web Service.
D2-VEERuleHighLowCheck	Used to create a VEERuleHighLowCheck.  This component invokes the D2-VEERuleHighLowCheck Business Object using the ATD2VEERuleHighLowCheck Inbound Web Service.
D1-HowToCreateMCInformation	Used to create a HowToCreateMCInformation.  This component invokes the D1-HowToCreateMCInformation Business Object using the ATD1HowToCreateMCInformation Inbound Web Service.
D1-HowToSendActivityResponse	Used to create a HowToSendActivityResponse.  This component invokes the D1-HowToSendActivityResponse Business Object using the ATD1HowToSendActivityResponse Inbound Web Service.
D1-AvgDailyEstItemConsumption	Used to create a AvgDailyEstItemConsumption.  This component invokes the D1-AvgDailyEstItemConsumption Business Object using the ATD1AvgDailyEstItemConsumption Inbound Web Service.
D1-VEEEligibilityCriteria	Used to create a VEEEligibilityCriteria.  This component invokes the D1-VEEEligibilityCriteria Business Object using the ATD1VEEEligibilityCriteria Inbound Web Service.
D2-VerifyUomTouSqimCExistForUs	Used to create a VerifyUomTouSqimCExistForUs.  This component invokes the D2-VerifyUomTouSqimCExistForUs Business Object using the ATD2VerifyUomTouSqimCExistForUs Inbound Web Service.

Component	Description
D1-DeviceEventSeeder	Used to create a DeviceEventSeeder.  This component invokes the D1-DeviceEventSeeder Business Object using the ATD1DeviceEventSeeder Inbound Web Service.
D1-FieldActivity	Used to create a FieldActivity.  This component invokes the D1-FieldActivity Business Object using the ATD1FieldActivity Inbound Web Service.
D1-ReaderRemark	Used to create a ReaderRemark.  This component invokes the D1-ReaderRemark Business Object using the ATD1ReaderRemark Inbound Web Service.
D1-TimeZoneTranslationLookup	Used to create a TimeZoneTranslationLookup.  This component invokes the D1-ATD1TimeZoneTranslationLookup Business Object using the ATD1ReaderRemark Inbound Web Service.
D2-UsageCalculationGroupLookup	Used to create a UsageCalculationGroupLookup.  This component invokes the D2-UsageCalculationGroupLookup Business Object using the ATD2UsageCalculationGroupLookup Inbound Web Service.
D2-MDMMasterConfig	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig.  This component invokes the D2-MDMMasterConfig Business Object using the ATD2MDMMasterConfig Inbound Web Service.
D2-MDMMasterConfig	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig.  This component invokes the D2-MDMMasterConfig Business Object using the ATD2MDMMasterConfig Inbound Web Service.
D2-MtrCommTrckngAggregatorType	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MtrCommTrckngAggregatorType.  This component invokes the D2-MtrCommTrckngAggregatorType Business Object using the ATD2MtrCommTrckngAggregatorType Inbound Web Service.

Component	Description
D1-EstimationSuppressionType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a EstimationSuppressionType.</p> <p>This component invokes the D1-EstimationSuppressionType Business Object using the ATD1EstimationSuppressionType Inbound Web Service.</p>
D2-InactiveMeasurementCheck	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a InactiveMeasurementCheck VEE Rule.</p> <p>This component invokes the D1-InactiveMeasurementCheck Business Object using the ATD2InactiveMeasurementCheck Inbound Web Service.</p>
D1-ChannelStatisticsType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatisticsType.</p> <p>This component invokes the D1-ChannelStatisticsType Business Object using the ATD1ChannelStatisticsType Inbound Web Service.</p>
D1-ChannelStatistics	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatistics.</p> <p>This component invokes the D1- ChannelStatistics Business Object using the ATD1ChannelStatistics Inbound Web Service.</p>
D1-FacilityLite	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a FacilityLite.</p> <p>This component invokes the D1- FacilityLite Business Object using the ATD1FacilityLite Inbound Web Service.</p>
D1-SpecificationLookup	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a SpecificationLookup.</p> <p>This component invokes the D1-SpecificationLookup Business Object using the ATD1SpecificationLookup Inbound Web Service.</p>
D1-MeasuringCompTypLite	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a MeasuringCompTypLite.</p> <p>This component invokes the D1-MeasuringCompTypLite Business Object using the ATD1MeasuringCompTypLite Inbound Web Service.</p>

Component	Description
D1-GetDvcFrmIdenTypFlag	Used to retrieve Device ID By Identifier and Type Flag using the ATD1 GetDvcFrmIdenTypFlag Inbound Web Service.
D1-GetSimdIdFromImd	Used to retrieve Simd ID By IMD ID using the ATD1GetSimdIdFromImd Inbound Web Service.
D1-GetMCFrmDvcExtId	Used to retrieve Measuring Component ID from Device External ID using the ATD1GetMCFrmDvcExtId Inbound Web Service.
D1-GetProductKeyFromSync	Used to Get Product Key from Sync Request ID using the ATD1 GetProductKeyFromSync Inbound Web Service.
D1-GetUsageFromExtID	Used to retrieve Usage ID from CCB Usage ID using the ATD1 GetUsageFromExtID Inbound Web Service.
D2-GetUSFromExtID	Used to retrieve US ID from External ID using the ATD1 GetUSFromExtID Inbound Web Service.
D1-GetDCFrmDvcExtId	Used to retrieve DC ID from External ID using the ATD1GetDCFrmDvcExtId Inbound Web Service.
D1-GetInstEvtFromDvcExId	Used to retrieve Install Event ID from Device External ID using ATD1GetInstEvtFromDvcExId Inbound Web Service.
D1-GetInstEvtFrmSPExtId	Used to retrieve Install Event ID from Service Point External ID using the ATD1GetInstEvtFrmSPExtId Inbound Web Service.
D1-GetMCFromExtID	Used to retrieve Measuring Component ID from External ID using the ATD1GetMCFromExtID Inbound Web Service.
D1-GetContactFromExtID	Used to retrieve Contact ID from External ID using the ATD1GetContactFromExtID Inbound Web Service.
D1-GetSpFromExtID	Used to retrieve Service Point ID from External ID using the ATD1GetSpFromExtID Inbound Web Service.
D1-GetSyncReqIdFrmExtId	Used to retrieve Sync Request ID from External ID using the ATD1GetSyncReqIdFrmExtId Inbound Web Service.

## S MDF Master

Component	Description
D2- MtrCommTrckgDimScanner	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a MtrCommTrckgDimScanner.</p> <p>This component invokes the D2- MtrCommTrckgDimScanner Business Object using the ATD2MtrCommTrckgDimScanner Inbound Web Service.</p>
D2- MtrCommTrckgDimScanner	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a MtrCommTrckgDimScanner.</p> <p>This component invokes the D2- MtrCommTrckgDimScanner Business Object using the ATD2MtrCommTrckgDimScanner Inbound Web Service.</p>
D1-EstimationSuppression	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a EstimationSuppression.</p> <p>This component invokes the D2- EstimationSuppression Business Object using the ATD2EstimationSuppression Inbound Web Service.</p>
D1-InitialLoadIMDSubtrInterval	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a InitialLoadIMDSubtrInterval.</p> <p>This component invokes the D1- InitialLoadIMDSubtrInterval Business Object using the ATD1InitialLoadIMDSubtrInterval Inbound Web Service.</p>
D1-EstimationIMDSubtrInterval	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a EstimationIMDSubtrInterval.</p> <p>This component invokes the D1- EstimationIMDSubtrInterval Business Object using the ATD1EstimationIMDSubtrInterval Inbound Web Service.</p>
D1-ManualIMDSubtrInterval	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a ManualIMDSubtrInterval.</p> <p>This component invokes the D1- ManualIMDSubtrInterval Business Object using the ATD1ManualIMDSubtrInterval Inbound Web Service.</p>



Component	Description
D1-SystemIMDSubrInterval	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a SystemIMDSubrInterval.</p> <p>This component invokes the D1-SystemIMDSubrInterval Business Object using the ATD1SystemIMDSubrInterval Inbound Web Service.</p>
D1-IntervalPriceSet	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a IntervalPriceSet.</p> <p>This component invokes the D1-IntervalPriceSetBusiness Object using the ATD1IntervalPriceSet Inbound Web Service.</p>
D1-SubtractiveIntvalMeasurement	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a SubtractiveIntvalMeasurement.</p> <p>This component invokes the D1-SubtractiveIntvalMeasurement Business Object using the ATD1SystemIMDSubrInterval Inbound Web Service.</p>
D1-IntrvlChanTypPhysSubtractiv	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a IntrvlChanTypPhysSubtractiv.</p> <p>This component invokes the D1-IntrvlChanTypPhysSubtractiv Business Object using the ATD1IntrvlChanTypPhysSubtractiv Inbound Web Service.</p>
D1-IntervalChannelSubtractive	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a IntervalChannelSubtractive.</p> <p>This component invokes the D1-IntervalChannelSubtractive Business Object using the ATD1IntervalChannelSubtractive Inbound Web Service.</p>
X1-RetrieveDeviceConfigId	<p>Used to retrieve Device Configuration ID.</p> <p>This component invokes the ATX1RetrieveDeviceConfigID Inbound Web Service using the X1-RETDCFGID Business Service.</p>
X1-RetrieveMeasuringComponentId	<p>Used to retrieve Measuring Component ID.</p> <p>This component invokes the ATX1RetrieveMeasuringComponentId Inbound Web Service using D1-RETMEACID Business Service.</p>

---

Component	Description
X1-CreateIntervalFunction	Used to add/create Override Interval Reads.  This component invokes the ATX1RCreateIntervalFunction Inbound Web Service using D2-OvrIntBck Service Script.

---

## SSN Admin Data

Component	Description
D7-AddMeterReadJobIntervalType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a SSN - Add Meter Read Job (Interval) Type outbound communication type.</p> <p>This component invokes the D7-AddMeterReadJobIntervalType Business Object using the ATD7AddMeterReadJobIntervalType Inbound Web Service.</p>
D7-GetJobStatusDRPType	<p>Used to perform actions such as ADD, READ, UPDATE, and DELETE a GetJobStatusDRPType record.</p> <p>This component is invoked using the ATD7GetJobStatusDRPType Inbound Web Service.</p>
D7-AddMeterReadJobScalrDRPType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a AddMeterReadJobScalrDRPType record.</p> <p>This component is invoked using ATD7AddMeterReadJobScalrDRPType Inbound Web Service.</p>
D7-AddMeterReadJobScalarType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a SSN - Add Meter Read Job (Scalar) Type outbound communication type.</p> <p>This component invokes the D7-AddMeterReadJobScalarType Business Object using the ATD7AddMeterReadJobScalarType Inbound Web Service.</p>
D7-MeterReadInterRespType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a SSN - Meter Read Response (Interval) Type inbound communication type.</p> <p>This component invokes the D7-MeterReadInterRespType Business Object using the ATD7MeterReadInterRespType Inbound Web Service.</p>
D7-MeterReadRespScalarType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a SSN - Meter Read Response (Scalar) Type inbound communication type.</p> <p>This component invokes the D7-MeterReadRespScalarType Business Object using the ATD7MeterReadRespScalarType Inbound Web Service.</p>

Component	Description
D7-DeviceEventMappingLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Value for SSN Device Event Mapping extendable lookup.</p> <p>This component invokes the D7-DeviceEventMappingLookup Business Object using the ATD7DeviceEventMappingLookup Inbound Web Service.</p>
D7-DataTimeZoneLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Value for SSN Data Time Zone extendable lookup.</p> <p>This component invokes the D7-DataTimeZoneLookup Business Object using the ATD7DataTimeZoneLookup Inbound Web Service.</p>
D7-AddPingJobType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Add Ping Job Type record.</p> <p>This component invokes the D7-AddPingJobType Business Object using the ATD7AddPingJobType Inbound Web Service.</p>
D7-DeviceStatusLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Device Status record.</p> <p>This component invokes the D7-DeviceStatusLookup Business Object using the ATD7DeviceStatusLookup Inbound Web Service.</p>
D7-ExecutionStatusLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Execution Status record.</p> <p>This component invokes the D7-ExecutionStatusLookup Business Object using the ATD7ExecutionStatusLookup Inbound Web Service.</p>
D7-GetStatusResponseType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Get Status Response Type record.</p> <p>This component invokes the D7-GetStatusResponseType Business Object using the ATD7GetStatusResponseType Inbound Web Service.</p>

Component	Description
D7-GetStatusType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Get Status Type record.</p> <p>This component invokes the D7-GetStatusType Business Object using the ATD7GetStatusType Inbound Web Service.</p>
D7-PingJobRespType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Ping Job Response Type record.</p> <p>This component invokes the D7-PingJobRespType Business Object using the ATD7PingJobRespType Inbound Web Service.</p>
D7-PriorityLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Priority record.</p> <p>This component invokes the D7-PriorityLookup Business Object using the ATD7PriorityLookup Inbound Web Service.</p>
D7-ProvisioningActionLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Provisioning Action record.</p> <p>This component invokes the D7-ProvisioningActionLookup Business Object using the ATD7ProvisioningActionLookup Inbound Web Service.</p>
D7-ProvisioningCommandStatus	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Provisioning Command Status record.</p> <p>This component invokes the D7-ProvisioningCommandStatus Business Object using the ATD7ProvisioningCommandStatus Inbound Web Service.</p>
D7-ProvisioningDataType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Provisioning Data Type record.</p> <p>This component invokes the D7-ProvisioningDataType Business Object using the ATD7ProvisioningDataType Inbound Web Service.</p>
D7-SSNVersionLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN SSN Version record.</p> <p>This component invokes the D7-SSNVersionLookup Business Object using the ATD7SSNVersionLookup Inbound Web Service.</p>

Component	Description
D7-StatusFlagNameLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of an SSN Status Flag Name record.</p> <p>This component invokes the D7-StatusFlagNameLookup Business Object using the ATD7StatusFlagNameLookup Inbound Web Service.</p>
D7-ChannelStatusLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Channel Status Lookup for SSN adapter.</p> <p>This component invokes the D7-ChannelStatusLookup Business Object using the ATD7ChannelStatusLookup Inbound Web Service.</p>
D7-ConnectDisconRespType	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Connect Disconnect Response Type for SSN adapter.</p> <p>This component invokes the D7-ConnectDisconRespType Business Object using the ATD7ConnectDisconRespType Inbound Web Service.</p>
D7-ConnectDisconnectType	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Connect Disconnect Type for SSN adapter.</p> <p>This component invokes the D7-ConnectDisconType Business Object using the ATD7ConnectDisconType Inbound Web Service.</p>
D7-HeadendSQLLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Headend SQI Lookup for SSN adapter.</p> <p>This component invokes the D7-HeadendSQLLookup Business Object using the ATD7HeadendSQLLookup Inbound Web Service.</p>
D7-HeadendTOULookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Headend TOU Lookup for SSN adapter.</p> <p>This component invokes the D7-HeadendTOULookup Business Object using the ATD7HeadendTOULookup Inbound Web Service.</p>

Component	Description
D7-HeadendUOMLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Headend UOM Lookup for SSN adapter.</p> <p>This component invokes the D7-HeadendUOMLookup Business Object using the ATD7HeadendUOMLookup Inbound Web Service.</p>
D7-IntStsCodeToCondMapLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a IntStsCodeToCondMapLookup for SSN adapter.</p> <p>This component invokes the D7-IntStsCodeToCondMapLookup Business Object using the ATD7IntStsCodeToCondMapLookup Inbound Web Service.</p>
D7-IntervalStatusLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Interval Status Lookup for SSN adapter.</p> <p>This component invokes the D7-IntervalStatusLookup Business Object using the ATD7IntervalStatusLookup Inbound Web Service.</p>
D7-MeterConnectionStatusLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Meter Connection Status Lookup for SSN adapter.</p> <p>This component invokes the D7-MeterConnectionStatusLookup Business Object using the ATD7MeterConnectionStatusLookup Inbound Web Service.</p>
D7-MeterReadTypeLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Meter Read Type Lookup for SSN adapter.</p> <p>This component invokes the D7-MeterReadTypeLookup Business Object using the ATD7MeterReadTypeLookup Inbound Web Service.</p>
D7-OldAdminStateNameLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE an Old Admin State Name Lookup for SSN adapter.</p> <p>This component invokes the D7-OldAdminStateNameLookup Business Object using the ATD7OldAdminStateNameLookup Inbound Web Service.</p>

Component	Description
D7-ReadModeLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Read Mode Lookup for SSN adapter.</p> <p>This component invokes the D7-ReadModeLookup Business Object using the ATD7ReadModeLookup Inbound Web Service.</p>
D7-RegisterReadSourceLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Register Read Source Lookup for SSN adapter.</p> <p>This component invokes the D7-RegisterReadSourceLookup Business Object using the ATD7RegisterReadSourceLookup Inbound Web Service.</p>
D7-RegisterStatusLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Register Status Lookup for SSN adapter.</p> <p>This component invokes the D7-RegisterStatusLookup Business Object using the ATD7RegisterStatusLookup Inbound Web Service.</p>
D7-RepDeviceAtLocForDecommType	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a RepDeviceAtLocForDecommType for SSN adapter.</p> <p>This component invokes the D7-RepDeviceAtLocForDecommType Business Object using the ATD7RepDeviceAtLocForDecommType Inbound Web Service.</p>
D7-ReplaceLocationType	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Replace Location Type for SSN adapter.</p> <p>This component invokes the D7-ReplaceLocationType Business Object using the ATD7ReplaceLocationType Inbound Web Service.</p>
D7-VersionMasterConfig	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Version Master Configuration for SSN adapter.</p> <p>This component invokes the D7-VersionMasterConfig Business Object using the ATD7VersionMasterConfig Inbound Web Service.</p>
D7-AddMeterToHarness	<p>Used to perform the AddMeterToHarness action to SSN test harness.</p> <p>This component invokes the D7-AddMeterToHarness using the ATD7AddMeterToHarness Inbound Web Service.</p>



Component	Description
D7-SetCommissionRequest	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a SetCommissionRequest Type record.</p> <p>This component invokes the D7-SetCommissionRequest using the ATD7SetCommissionRequest Inbound Web Service.</p>
D7-SetVoltage	<p>Used to perform action set voltage on a SSN device in test harness.</p> <p>This component invokes the D7- SetVoltage using the ATD7SetVoltage Inbound Web Service.</p>
DG-GenericMasterConfig	<p>Used to perform actions on GenericMasterConfig record.</p> <p>This invokes DG-GenericMasterConfig using ATDGGenericMasterConfig IWS.</p>
DG-HeadendUOMLookup	<p>Used to perform actions on HeadendUOMLookup record.</p> <p>This invokes DG-HeadendUOMLookup using ATDGHeadendUOMLookup IWS.</p>
DG-CIMGetMtrReadScalarType	<p>Used to perform actions on CIMGetMtrReadScalarType record.</p> <p>This invokes DG-CIMGetMtrReadScalarType using ATDGCIMGetMtrReadScalarType IWS.</p>
DG-CIMMtrReadResponseDRType	<p>Used to perform actions on CIMMtrReadResponseDRType record.</p> <p>This invokes DG-CIMMtrReadResponseDRType using ATDGCIMMtrReadResponseDRType IWS.</p>

## SSN Master Data

Component	Description
D7-InitialLoadIMDInterval	<p>Used to ADD Initial Measurement Interval Data for SSN Adapter.</p> <p>This component invokes the D7-InitialLoadIMDInterval Business Object using the ATD7InitialLoadIMDInterval Inbound Web Service.</p>

---

Component	Description
D7-InitialLoadIMDScalar	Used to ADD Initial Measurement Scalar Data for SSN Adapter.  This component invokes the D7-InitialLoadIMDScalar Business Object using the ATD7InitialLoadIMDScalar Inbound Web Service.
D7-SmartMeter	Used to perform actions such as ADD, READ, and UPDATE and DELETE a Smart Meter for SSN adapter.  This component invokes the D7-SmartMeter Business Object using the ATD7SmartMeter Inbound Web Service.

---

## Sales and Marketing

Component	Description
C1-CampaignAdd	Used to add a Campaign record.  This component invokes the ATC1Campaign Inbound Web Service using the C1-CampaignAdd Business Service.
C1-CampaignRead	Used to read a Campaign record.  This component invokes the ATC1Campaign Inbound Web Service using the C1-CampaignRead Business Service.
C1-CampaignUpdate	Used to update a Campaign record.  This component invokes the ATC1Campaign Inbound Web Service using the C1-Campaign Update Business Service.
C1-CampaignDelete	Used to delete a Campaign record.  This component invokes the ATC1Campaign Inbound Web Service using the C1-CampaignDelete Business Service.
C1-LeadAccountAdd	Used to add a Lead Account record.  This component invokes the ATC1LeadAccount Inbound Web Service using the C1-LeadAccount Business Object.
C1-LeadAccountRead	Used to read a Lead Account record.  This component invokes the ATC1LeadAccount Inbound Web Service using the C1-LeadAccount Business Object.
C1-LeadAccountUpdate	Used to update a Lead Account record.  This component invokes the ATC1LeadAccount Inbound Web Service using the C1-LeadAccount Business Object.
C1-LeadAccountDelete	Used to delete a Lead Account record.  This component invokes the ATC1LeadAccount Inbound Web Service using the C1-LeadAccount Business Object.
C1-PackageAdd	Used to add a Package record.  This component invokes the ATC1PackageBS Inbound Web Service using the C1-PackageAdd Business Service.

Component	Description
C1-PackageRead	Used to read a Package record.  This component invokes the ATC1Package Inbound Web Service using the C1-PackagePhysical Business Object.
C1-PackageUpdate	Used to update a Package record.  This component invokes the ATC1PackageBS Inbound Web Service using the C1-PackagePhysical Business Service.
C1-PackageDelete	Used to delete a Package record.  This component invokes the ATC1Package Inbound Web Service using the C1-PackagePhysical Business Object.
C1-ThirdPartyRepAdd	Used to add a Third Party Representative record.  This component invokes the ATC1ThirdPartyRep Inbound Web Service using the C1-ThirdPartyRepresentative Business Object.
C1-ThirdPartyRepRead	Used to read a Third Party Representative record.  This component invokes the ATC1ThirdPartyRep Inbound Web Service using the C1-ThirdPartyRepresentative Business Object.
C1-ThirdPartyRepUpdate	Used to update a Third Party Representative record.  This component invokes the ATC1ThirdPartyRep Inbound Web Service using the C1-ThirdPartyRepresentative Business Object.
C1-ThirdPartyRepDelete	Used to delete a Third Party Representative record.  This component invokes the ATC1ThirdPartyRep Inbound Web Service using the C1-ThirdPartyRepresentative Business Object.
C1-SalesRepIndividualAdd	Used to add an Individual Sales Representative record.  This component invokes the ATC1SalesRepIndividual Inbound Web Service using the C1-SRpInPost Service Script.
C1-SalesRepIndividualRead	Used to read an Individual Sales Representative record.  This component invokes the ATC1SalesRepIndividualRead Inbound Web Service using the C1-SRInd Service Script.

Component	Description
C1-SalesRepIndividualUpdate	Used to update an Individual Sales Representative record.  This component invokes the ATC1SalesRepIndividual Inbound Web Service using the C1-SRpInPost Service Script.
C1-SalesRepIndividualDelete	Used to delete an Individual Sales Representative record.  This component invokes the ATC1SalesRepIndividual Inbound Web Service using the C1-SRpInPost Service Script.
C1-SalesRepGroupAdd	Used to add a Group Sales Representative record.  This component invokes the ATC1SalesRepGroup Inbound Web Service using the C1-SalesRepGroup Business Object.
C1-SalesRepGroupRead	Used to read a Group Sales Representative record.  This component invokes the ATC1SalesRepGroup Inbound Web Service using the C1-SalesRepGroup.
C1-SalesRepGroupUpdate	Used to update an Individual Sales Representative record.  This component invokes the ATC1SalesRepGroup Inbound Web Service using the C1-SalesRepGroup Business Object.
C1-SalesRepGroupDelete	Used to delete an Individual Sales Representative record.  This component invokes the ATC1SalesRepIndividual Inbound Web Service Business Object.
C1-SalesRepLogsAdd	Used to add a Sales Representative Log record.  This component invokes the ATC1SalesRepLogs Inbound Web Service using the C1-SalesRepLogs Business Object.
C1-SalesRepLogsRead	Used to read a Sales Representative Log record.  This component invokes the ATC1SalesRepLogs Inbound Web Service using the C1-SalesRepLogs Business Object.
C1-CampaignInitiativeAdd	Used to add a Campaign Initiative record.  This component invokes the ATC1CampaignInitiative Inbound Web Service using the C1-InitiativeService Business Object.

Component	Description
C1-CampaignInitiativeRead	Used to read a Campaign Initiative record.  This component invokes the ATC1CampaignInitiative Inbound Web Service using the C1-InitiativeService Business Object.
C1-CampaignInitiativeUpdate	Used to update a Campaign Initiative record.  This component invokes the ATC1CampaignInitiative Inbound Web Service using the C1-InitiativeService Business Object.
C1-CampaignInitiativeDelete	Used to delete a Campaign Initiative record.  This component invokes the ATC1CampaignInitiative Inbound Web Service using the C1-InitiativeService Business Object.
C1-ContractOptInitiativeAdd	Used to add a Contract Option Initiative record.  This component invokes the ATC1ContractOptInitiative Inbound Web Service using the C1-InitiativeService Business Object.
C1-ContractOptInitiativeRead	Used to read a Contract Option Initiative record.  This component invokes the ATC1ContractOptInitiative Inbound Web Service using the C1-InitiativeService Business Object.
C1-ContractOptInitiativeUpdate	Used to update a Contract Option Initiative record.  This component invokes the ATC1ContractOptInitiative Inbound Web Service using the C1-InitiativeService Business Object.
C1-ContractOptInitiativeDelete	Used to delete a Contract Option Initiative record.  This component invokes the ATC1ContractOptInitiative Inbound Web Service using the C1-InitiativeService Business Object.
C1-ConservationInitiativeAdd	Used to add a Conservation Initiative record.  This component invokes the ATC1ConservationInitiative Inbound Web Service using the C1-InitiativeConservationProg Business Object.
C1-ConservationInitiativeRead	Used to read a Conservation Initiative record.  This component invokes the ATC1ConservationInitiative Inbound Web Service using the C1-InitiativeConservationProg Business Object.

Component	Description
C1-ConservationInitiativeUpd	Used to update a Conservation Initiative record.  This component invokes the ATC1ConservationInitiative Inbound Web Service using the C1-InitiativeConservationProg Business Object.
C1-ConservationInitiativeDel	Used to delete a Conservation Initiative record.  This component invokes the ATC1ConservationInitiative Inbound Web Service using the C1-InitiativeConservationProg Business Object.
C1-InitiativeLogsRead	Used to read an Initiative Log record.  This component invokes the ATC1InitiativeLogs Inbound Web Service using the C1-InitiativeLogs Business Object.
C1-InitiativeLogsAdd	Used to add an Initiative Log record.  This component invokes the ATC1InitiativeLogs Inbound Web Service using the C1-InitiativeLogs Business Object.
C1-MyLeads	Used to get the representative link to the user.  This component also retrieves all group representatives linked to the representative. This component invokes the ATC1MyLead Inbound Web Service using the C1-MyLead Service Script.
C1-LeadQuery	Used to get the lead details depending on the search group used, by filling up the correct schema group.  This component invokes the ATC1LeadQuery Inbound Web Service using the C1-LeadQuery Business Service.
C1-InitiativeQuery	Used to get the initiative details based on the C1-INTVQ1 zone.  This component invokes the ATC1InitiativeQuery Inbound Web Service using the C1-InitiativeQuery Business Service.
C1-LeadAdd	Used to create a Lead record.  This component invokes the ATC1LeadAdd Inbound Web Service using the C1LeadPhysical Business Object.

Component	Description
C1-LeadRead	Used to read a Lead record.  This component invokes the ATC1Lead Inbound Web Service using the C1LeadPhysical Business Object.
C1-LeadUpdate	Used to update a Lead record.  This component invokes the ATC1Lead Inbound Web Service using the C1LeadPhysical Business Object.
C1-LeadDelete	Used to delete a Lead record.  This component invokes the ATC1Lead Inbound Web Service using the C1LeadPhysical Business Object.
C1-LeadEventAdd	Used to create a Lead Event record.  This component invokes the ATC1LeadEvent Web Service using the C1LeadPhysical Business Object.
C1-LeadEventRead	Used to read a Lead Event record.  This component invokes the ATC1LeadEvent Web Service using the C1LeadPhysical Business Object.
C1-LeadEventUpdate	Used to update a Lead Event record.  This component invokes the ATC1LeadEvent Web Service using the C1LeadPhysical Business Object.
C1-OrderAdd	Used to create an Order record.  This component invokes the ATC1Order Inbound Web Service using the C1OrderAdd Business Service.
C1-OrderRead	Used to read an existing Order record.  This component invokes the ATC1Order Inbound Web Service using the C1OrderRead Business Service.
C1-OrderUpdate	Used to update an existing Order record.  This component invokes the ATC1Order Inbound Web Service using the C1OrderUpdate Business Service.
C1-QuoteAdd	Used to create a Quote record.  This component invokes the ATC1Quote Inbound Web Service using the C1QuoteAdd Business Service.



---

<b>Component</b>	<b>Description</b>
C1-QuoteRead	Used to create a Quote record.  This component invokes the ATC1Quote Inbound Web Service using the C1QuoteAdd Business Service.
C1-QuoteUpdate	Used to update a Quote record.  This component invokes the ATC1Quote Inbound Web Service using the C1QuoteAdd Business Service.
C1-QuoteDelete	Used to delete a Quote record.  This component invokes the ATC1Quote Inbound Web Service using the C1QuoteAdd Business Service.

---

## Self Service

Component	Description
C1-RetrieveServiceTask	Used to retrieve Service Task record.  This component invokes the ATC1RetrieveServiceTask Inbound Web Service using the C1-RETSVCTSK Business Service.
C1-ThirdPartyAcctVerificationTaskRead	Used to read a Third Party Account Verification Task.  This component invokes the ATC1ThirdPartyAcctVerifTask Inbound Web Service using the C1-ThirdPartyAcctVerifTaskRead Business Object.
C1-StartServiceRequestSAAdd	Used to add a Start Service Request SA record.  This component invokes the ATC1StartServiceRequestSA Inbound Web Service using the C1-StartServiceRequestSA Business Object.
C1-StartServiceRequestSADelete	Used to delete a Start Service Request SA record.  This component invokes the ATC1StartServiceRequestSA Inbound Web Service using the C1-StartServiceRequestSA Business Object.
C1-StartServiceRequestSARead	Used to read a Start Service Request SA record.  This component invokes the ATC1StartServiceRequestSA Inbound Web Service using the C1-StartServiceRequestSA Business Object.
C1-StartServiceRequestSAUpdate	Used to update a Start Service Request SA record.  This component invokes the ATC1StartServiceRequestSA Inbound Web Service using the C1-StartServiceRequestSA Business Object.
C1-StopServiceRequestSAAdd	Used to add a Stop Service Request SA record.  This component invokes the ATC1StopServiceRequestSA Inbound Web Service using the C1-StopServiceRequestSA Business Object.
C1-StopServiceRequestSADelete	Used to delete a Stop Service Request SA record.  This component invokes the ATC1StopServiceRequestSA Inbound Web Service using the C1-StopServiceRequestSA Business Object.

Component	Description
C1-StopServiceRequestSAUpdate	Used to update a Stop Service Request SA record.  This component invokes the ATC1StopServiceRequestSA Inbound Web Service using the C1-StopServiceRequestSA Business Object.
C1-StopServiceRequestSARead	Used to read a Stop Service Request SA record.  This component invokes the ATC1StopServiceRequestSA Inbound Web Service using the C1-StopServiceRequestSA Business Object.
C1-SSStartStopXferServiceTaskAdd	Used to add a Start Stop Transfer Service Task.  This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStartStopXferServiceTaskDelete	Used to delete a Start Stop Transfer Service Task.  This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStartStopXferServiceTaskRead	Used to read a Start Stop Transfer Service Task.  This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStartStopXferServiceTaskUpdate	Used to update a Start Stop Transfer Service Task.  This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSAddServiceRequestTypeAdd	Used to add Self-Service Add Service Request Type.  This component invokes the ATC1-SSAddServiceRequestType Inbound Web Service using the C1-SSAddServiceRequestType Business Object.
C1-SSAddServiceRequestTypeDelete	Used to delete Self-Service Add Service Request Type.  This component invokes the ATC1-SSAddServiceRequestType Inbound Web Service using the C1-SSAddServiceRequestType Business Object.

Component	Description
C1-SSAddServiceRequestTypeRead	<p>Used to read Self-Service Add Service Request Type.</p> <p>This component invokes the ATC1-SSAddServiceRequestType Inbound Web Service using the C1-SSAddServiceRequestType Business Object.</p>
C1-SSAddServiceRequestTypeUpdate	<p>Used to update Self-Service Add Service Request Type.</p> <p>This component invokes the ATC1-SSAddServiceRequestType Inbound Web Service using the C1-SSAddServiceRequestType Business Object.</p>
C1-SSNewServiceRequestTypeAdd	<p>Used to add Self-Service New Service Request Type.</p> <p>This component invokes the ATC1-SSNewServiceRequestType Inbound Web Service using the C1-SSNewServiceRequestType Business Object.</p>
C1-SSNewServiceRequestTypeDelete	<p>Used to delete Self-Service New Service Request Type.</p> <p>This component invokes the ATC1-SSNewServiceRequestType Inbound Web Service using the C1-SSNewServiceRequestType Business Object.</p>
C1-SSNewServiceRequestTypeRead	<p>Used to read Self-Service New Service Request Type.</p> <p>This component invokes the ATC1-SSNewServiceRequestType Inbound Web Service using the C1-SSNewServiceRequestType Business Object.</p>
C1-SSNewServiceRequestTypeUpdate	<p>Used to update Self-Service New Service Request Type.</p> <p>This component invokes the ATC1-SSNewServiceRequestType Inbound Web Service using the C1-SSNewServiceRequestType Business Object.</p>
C1-SSStartStopXferServiceTaskAdd	<p>Used to add a Start Stop Transfer Service Task.</p> <p>This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.</p>

Component	Description
C1-SSStartStopXferServiceTaskDelete	<p>Used to delete a Start Stop Transfer Service Task.</p> <p>This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.</p>
C1-SSStartStopXferServiceTaskRead	<p>Used to read a Start Stop Transfer Service Task.</p> <p>This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.</p>
C1-SSStartStopXferServiceTaskUpdate	<p>Used to update a Start Stop Transfer Service Task.</p> <p>This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.</p>
C1-SSStopServiceRequestTypeAdd	<p>Used to add Self-Service Stop Service Request Type.</p> <p>This component invokes the ATC1-SSStopServiceRequestType Inbound Web Service using the C1-SSStopServiceRequestType Business Object.</p>
C1-SSStopServiceRequestTypeDelete	<p>Used to delete Self-Service Stop Service Request Type.</p> <p>This component invokes the ATC1-SSStopServiceRequestType Inbound Web Service using the C1-SSStopServiceRequestType Business Object.</p>
C1-SSStopServiceRequestTypeRead	<p>Used to read Self-Service Stop Service Request Type.</p> <p>This component invokes the ATC1-SSStopServiceRequestType Inbound Web Service using the C1-SSStopServiceRequestType Business Object.</p>
C1-SSStopServiceRequestTypeUpdate	<p>Used to Update Self-Service Stop Service Request Type.</p> <p>This component invokes the ATC1-SSStopServiceRequestType Inbound Web Service using the C1-SSStopServiceRequestType Business Object.</p>

Component	Description
C1-SSTransferServiceReqTypeAdd	<p>Used to add Self-Service Transfer Service Request Type.</p> <p>This component invokes the ATC1-SSTransferServiceReqType Inbound Web Service using the C1-SSTransferServiceReqType Business Object.</p>
C1-SSTransferServiceReqTypeDelete	<p>Used to delete Self-Service Transfer Service Request Type.</p> <p>This component invokes the ATC1-SSTransferServiceReqType Inbound Web Service using the C1-SSTransferServiceReqType Business Object.</p>
C1-SSTransferServiceReqTypeRead	<p>Used to read Self-Service Transfer Service Request Type.</p> <p>This component invokes the ATC1-SSTransferServiceReqType Inbound Web Service using the C1-SSTransferServiceReqType Business Object.</p>
C1-SSTransferServiceReqTypeUpdate	<p>Used to update Self-Service Transfer Service Request Type.</p> <p>This component invokes the ATC1-SSTransferServiceReqType Inbound Web Service using the C1-SSTransferServiceReqType Business Object.</p>
C1-ThirdPartyAutoPaySetupAdd	<p>Used to add a Third Party Auto Pay Setup.</p> <p>This component invokes the ATC1ThirdPartyAutoPaySetup Inbound Web Service using the C1-TPApaySet Service Script.</p>
C1-ThirdPartyAutoPaySetupCancel	<p>Used to cancel a Third Party Auto Pay Setup.</p> <p>This component invokes the ATC1ThirdPartyAutoPaySetup Inbound Web Service using the C1-TPApaySet Service Script.</p>
C1-OneTimePaymentTaskRead	<p>Used to read a One Time Payment Service Task.</p> <p>This component invokes the ATC1OneTimePaymentTask Inbound Web Service using the WX-OneTimePayTask Business Object.</p>
C1-CCBOneTimeTaskTypeAdd	<p>Used for adding a One Time Task Type record.</p> <p>This component invokes the ATC1CCBOneTimePaymentTaskType Inbound Web Service using the C1-OneTimePaymentTaskType Business Object.</p>

Component	Description
C1-CCBOneTimeTaskTypeDelete	Used for deleting a One Time Task Type record.  This component invokes the ATC1CCBOneTimePaymentTaskType Inbound Web Service using the C1-OneTimePaymentTaskType Business Object.
C1-CCBOneTimeTaskTypeRead	Used for reading a One Time Task Type record.  This component invokes the ATC1CCBOneTimePaymentTaskType Inbound Web Service using the C1-OneTimePaymentTaskType Business Object.
C1-CCBOneTimeTaskTypeUpdate	Used for updating a One Time Task Type record.  This component invokes the ATC1CCBOneTimePaymentTaskType Inbound Web Service using the C1-OneTimePaymentTaskType Business Object
C1-SSStartStopXferServiceTaskTypeAdd	Used for adding Start Stop Transfer Service Task Type.  This component invokes the ATC1SSStartStopXferSvcTaskType Inbound Web Service using the C1-SSStartStopXferSvcTaskType Business Object.
C1-SSStartStopXferServiceTaskTypeDelete	Used for deleting Start Stop Transfer Service Task Type.  This component invokes the ATC1SSStartStopXferSvcTaskType Inbound Web Service using the C1-SSStartStopXferSvcTaskType Business Object.
C1-SSStartStopXferServiceTaskTypeRead	Used for reading Start Stop Transfer Service Task Type.  This component invokes the ATC1SSStartStopXferSvcTaskType Inbound Web Service using the C1-SSStartStopXferSvcTaskType Business Object.
C1-ThirdPartyAutoPaySetupUpdate	Used to cancel a Third Party Auto Pay Setup.  This component invokes the ATC1ThirdPartyAutoPaySetup Inbound Web Service using the C1-TPApaySet Service Script.
C1-AutoPayTaskRead	Used to read an Auto Pay Setup Service Task.  This component invokes the ATC1AutoPayTask Inbound Web Service using the WX-AutoPayTask Business Object.

Component	Description
C1-ThirdPartyAutoPayTaskRead	Used to read a Third Party Auto Pay Task.  This component invokes the ATC1ThirdPartyAutoPayTask Inbound Web Service using the C1-ThirdPartyAutoPayTask Business Object.
C1-OneTimePaymentTaskAdd	Used to add One Time Payment Service Task.  This component invokes the WXMakePayment Inbound Web Service using the WX-OneTimePayTask Business Object.
C1-OneTimePaymentTaskRead	Used to read a One Time Payment Service Task.  This component invokes the ATC1OneTimePaymentTask Inbound Web Service using the WX-OneTimePayTask Business Object.
C1-ThirdPartyOneTimePayNotifAdd	Used to add a Third Party One Time Payment.  This component invokes the ATC1ThirdPartyPaymntIntegration Inbound Web Service using the C1-TPPayNotf Service Script.

## Sensus Admin Data

Component	Description
D6-DeviceEventMappingLookup	Used to perform actions such as ADD, READ, UPDATE and DELETE a Value for Sensus Device Event Mapping extendable lookup.  This component invokes the D6-DeviceEventMappingLookup Business Object using the ATD6DeviceEventMappingLookup Inbound Web Service.
D6-HeadendUOMLookup	Used to perform actions such as ADD, READ, UPDATE and DELETE a Value for Sensus UOM Code to Standard UOM Mapping extendable lookup.  This component invokes the D6-HeadendUOMLookup Business Object using the ATD6HeadendUOMLookup Inbound Web Service.



Component	Description
D6-InitiateMeterByMeterIdType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Sensus -Initiate Meter Read By Meter ID outbound communication type.</p> <p>This component invokes the D6-InitiateMeterByMeterIdType Business Object using the ATD6InitiateMeterByMeterIdType Inbound Web Service.</p>
D6-ReadingChgNotificationType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Sensus - Reading Change Notification inbound communication type.</p> <p>This component invokes the D6-ReadingChgNotificationType Business Object using the ATD6ReadingChgNotificationType Inbound Web Service.</p>
D6-SensusMasterConfig	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE a Sensus Master Configuration.</p> <p>This component invokes the D6-SensusMasterConfig Business Object using the ATD6SensusMasterConfig Inbound Web Service.</p>
D6-CDCodeReasonLookup	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of a Sensus CD Reason Code record.</p> <p>This component invokes the D6-CDCodeReasonLookup Business Object using the ATD6CDCodeReasonLookup Inbound Web Service.</p>
D6-InitiateOutageDetectionType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of a Sensus Intitiate Outage Detection Type record.</p> <p>This component invokes the D6-InitiateOutageDetectionType Business Object using the ATD6InitiateOutageDetectionType Inbound Web Service.</p>
D6-OutageDetectEvtNotifType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of a Sensus Outage Detection Event Notification Type record.</p> <p>This component invokes the D6-OutageDetectEvtNotifType Business Object using the ATD6OutageDetectEvtNotifType Inbound Web Service.</p>

Component	Description
D6-UnsolicitedEventNotifType	<p>Used to perform actions such as ADD, READ, UPDATE and DELETE of a Sensus Unsolicited Event Notification Type record.</p> <p>This component invokes the D6-UnsolicitedEventNotifType Business Object using the ATD6UnsolicitedEventNotifType Inbound Web Service.</p>
D6-ConnectDisconStateChgNtfTyp	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Connect Disconnect State Change Notify Type for Sensus adapter.</p> <p>This component invokes the D6-ConnectDisconStateChgNtfTyp Business Object using the ATD6ConnectDisconStateChgNtfTyp Inbound Web Service.</p>
D6-InitiateConnectDisconType	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Initiate Connect Disconnect Type for Sensus adapter.</p> <p>This component invokes the D6-InitiateConnectDisconType Business Object using the ATD6InitiateConnectDisconType Inbound Web Service.</p>
D6-IntStsCodeToCondMapLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a IntStsCodeToCondMapLookup for Sensus adapter.</p> <p>This component invokes the D6-IntStsCodeToCondMapLookup Business Object using the ATD6IntStsCodeToCondMapLookup Inbound Web Service.</p>
D6-LoadActionCodeLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Load Action Code Lookup for Sensus adapter.</p> <p>This component invokes the D6-LoadActionCodeLookup Business Object using the ATD6LoadActionCodeLookup Inbound Web Service.</p>
D6-MeterAddNotificationType	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Meter Add Notification Type for Sensus adapter.</p> <p>This component invokes the D6-MeterAddNotificationType Business Object using the ATD6MeterAddNotificationType Inbound Web Service.</p>

Component	Description
D6-MeterRemoveNotifType	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Meter Remove Notify Type for Sensus adapter.</p> <p>This component invokes the D6-MeterRemoveNotifType Business Object using the ATD6MeterRemoveNotifType Inbound Web Service.</p>
D6-OutageEventTypeLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Outage Event Type Lookup for Sensus adapter.</p> <p>This component invokes the D6-OutageEventTypeLookup Business Object using the ATD6OutageEventTypeLookup Inbound Web Service.</p>
D6-SensusTimeUnits	<p>This component can be used to perform actions such as ADD, READ, and UPDATE and DELETE a Sensus Time Units for Sensus adapter.</p> <p>This component invokes the D6-SensusTimeUnits Business Object using the ATD6SensusTimeUnits Inbound Web Service.</p>
D6-ServiceTypeMappingLookup	<p>Used to perform actions such as ADD, READ, and UPDATE and DELETE a Service Type Mapping Lookup for Sensus adapter.</p> <p>This component invokes the D6-ServiceTypeMappingLookup Business Object using the ATD6ServiceTypeMappingLookup Inbound Web Service.</p>
D6-AddMeterToHarness	<p>Used to perform the AddMeterToHarness action to Sensus test harness.</p> <p>This component invokes the D6-AddMeterToHarness Business Object using the ATD6AddMeterToHarness Inbound Web Service.</p>
D6-RemoveMeter	<p>Used to perform the remove meter action from Sensus test harness.</p> <p>This component invokes the D6-RemoveMeter using the ATD6RemoveMeter Inbound Web Service.</p>

---

## Sensus Master Data

---

Component	Description
D6-InitialLoadIMDInterval	<p>Used to ADD Initial Measurement Interval Data for Sensus adapter.</p> <p>This component invokes the D6-InitialLoadIMDInterval Business Object using the ATD6InitialLoadIMDInterval Inbound Web Service.</p>
D6-InitialLoadIMDScalar	<p>Used to ADD Initial Measurement Scalar Data for Sensus adapter.</p> <p>This component invokes the D6-InitialLoadIMDScalar Business Object using the ATD6InitialLoadIMDScalar Inbound Web Service.</p>
D6-SmartMeter	<p>This component can be used to perform actions such as ADD, READ, and UPDATE and DELETE a Smart Meter for Sensus adapter.</p> <p>This component invokes the D6-SmartMeter Business Object using the ATD6SmartMeter Inbound Web Service.</p>

---

## Service Order Management

Component	Description
C1-ActivityInformation	<p>Used to read an Activity Information.</p> <p>This component invokes the ATC1ActivityInformation Inbound Web Service using the C1-ActvtyInf Service Script.</p>
C1-DeviceInformation	<p>Used to retrieving the Device Information.</p> <p>This component invokes the ATC1DeviceInformation Inbound Web Service using the C1-DeviceInf Service Script.</p>
C1-FACompletionMessage	<p>Used for the FA Completion Message.</p> <p>This component invokes the ATC1FACompletionMessage Inbound Web Service using the C1-FACmplMsg Service Script.</p>
C1-PremiseFAGTT	<p>Used for inserting the Premise Activities to GTT.</p> <p>This component invokes the ATC1PremFAGTT Inbound Web Service using the C1-PremFAGTT Service Script.</p>
C1-ServiceRequestUpdate	<p>Used for updating a SOM Request.</p> <p>This component invokes the ATC1ServiceRequestUpdate Inbound Web Service using the C1-SvcReqUpd Service Script.</p>

## Service Task Type

Component	Description
C1-OutageCallTypeAdd	<p>Used to add an Outage Call Type record.</p> <p>This component invokes the ATC1OutageCallType Inbound Web Service using the C1-OutageCallType Business Object.</p>
C1-OutageCallTypeRead	<p>Used to read an Outage Call Type record.</p> <p>This component invokes the ATC1OutageCallType Inbound Web Service using the C1-OutageCallType Business Object.</p>
C1-OutageCallTypeUpdate	<p>Used to update an Outage Call Type record.</p> <p>This component invokes the ATC1OutageCallType Inbound Web Service using the C1-OutageCallType Business Object.</p>
C1-OutageCallTypeDelete	<p>Used to delete an Outage Call Type record.</p> <p>This component invokes the ATC1OutageCallType Inbound Web Service using the C1-OutageCallType Business Object.</p>
C1-ThirdPartyAcctVerifTaskTypeAdd	<p>Used to add a Third Party Account Verification Task Type.</p> <p>This component invokes the ATC1ThirdPartyAcctVerificationTaskType Inbound Web Service using the C1-ThirdPartyAcctVerifTaskType Business Object.</p>
C1-ThirdPartyAcctVerifTaskTypeDelete	<p>Used to delete a Third Party Account Verification Task Type.</p> <p>This component invokes the ATC1ThirdPartyAcctVerificationTaskType Inbound Web Service using the C1-ThirdPartyAcctVerifTaskType Business Object.</p>
C1-ThirdPartyAcctVerifTaskTypeRead	<p>Used to read a Third Party Account Verification Task Type.</p> <p>This component invokes the ATC1ThirdPartyAcctVerificationTaskType Inbound Web Service using the C1-ThirdPartyAcctVerifTaskType Business Object.</p>
C1-ThirdPartyAcctVerifTaskTypeUpdate	<p>Used to update a Third Party Account Verification Task Type.</p> <p>This component invokes the ATC1ThirdPartyAcctVerificationTaskType Inbound Web Service using the C1-ThirdPartyAcctVerifTaskType Business Object.</p>

Component	Description
C1-ThirdPartyAutoPayTaskTypeAdd	Used to add a Third Party Auto Pay Task Type.  This component invokes the ATC1ThirdPartyAutoPayTaskType Inbound Web Service using the C1-ThirdPartyAutoPayTaskType Business Object.
C1-ThirdPartyAutoPayTaskTypeDelete	Used to delete a Third Party Auto Pay Task Type.  This component invokes the ATC1ThirdPartyAutoPayTaskType Inbound Web Service using the C1-ThirdPartyAutoPayTaskType Business Object.
C1-ThirdPartyAutoPayTaskTypeRead	Used to read a Third Party Auto Pay Task Type.  This component invokes the ATC1ThirdPartyAutoPayTaskType Inbound Web Service using the C1-ThirdPartyAutoPayTaskType Business Object.
C1-ThirdPartyAutoPayTaskTypeUpdate	Used to update a Third Party Auto Pay Task Type.  This component invokes the ATC1ThirdPartyAutoPayTaskType Inbound Web Service using the C1-ThirdPartyAutoPayTaskType Business Object.
C1-ThirdPartyOneTimePayTaskTypeAdd	Used to add a Third Party One Time Payment Task Type.  This component invokes the ATC1ThirdPartyOneTimePyTaskType Inbound Web Service using the C1-ThirdPartyOneTimePyTaskType Business Object.
C1-ThirdPartyOneTimePayTaskTypeDelete	Used to delete a Third Party One Time Payment Task Type.  This component invokes the ATC1ThirdPartyOneTimePyTaskType Inbound Web Service using the C1-ThirdPartyOneTimePyTaskType Business Object.
C1-ThirdPartyOneTimePayTaskTypeRead	Used to delete a Third Party One Time Payment Task Type.  This component invokes the ATC1ThirdPartyOneTimePyTaskType Inbound Web Service using the C1-ThirdPartyOneTimePyTaskType Business Object.

Component	Description
C1-ThirdPartyOneTimePayTaskTypeUpdate	Used to update a Third Party One Time Payment Task Type.  This component invokes the ATC1ThirdPartyOneTimePyTaskType Inbound Web Service using the C1-ThirdPartyOneTimePyTaskType Business Object.
C1-AutoPayTaskTypeAdd	Used to add an Auto Pay Task Type.  This component invokes the ATC1AutoPayTaskType Inbound Web Service using the WX-AutoPayTaskType Business Object.
C1-AutoPayTaskTypeDelete	Used to delete an Auto Pay Task Type.  This component invokes the ATC1AutoPayTaskType Inbound Web Service using the WX-AutoPayTaskType Business Object.
C1-AutoPayTaskTypeRead	Used to read an Auto Pay Task Type.  This component invokes the ATC1AutoPayTaskType Inbound Web Service using the WX-AutoPayTaskType Business Object.
C1-AutoPayTaskTypeUpdate	Used to update an Auto Pay Task Type.  This component invokes the ATC1AutoPayTaskType Inbound Web Service using the WX-AutoPayTaskType Business Object.
C1-OneTimePaymentTaskTypeAdd	Used to add a One Time Payment Task Type.  This component invokes the ATC1OneTimePaymentTaskType Inbound Web Service using the WX-OneTimePayTaskType Business Object.
C1-OneTimePaymentTaskTypeDelete	Used to delete a One Time Payment Task Type.  This component invokes the ATC1OneTimePaymentTaskType Inbound Web Service using the WX-OneTimePayTaskType Business Object.
C1-OneTimePaymentTaskTypeRead	Used to read a One Time Payment Task Type.  This component invokes the ATC1OneTimePaymentTaskType Inbound Web Service using the WX-OneTimePayTaskType Business Object.



Component	Description
C1-OneTimePaymentTaskTypeUpdate	Used to update a One Time Payment Task Type.  This component invokes the ATC1OneTimePaymentTaskType Inbound Web Service using the WX-OneTimePayTaskType Business Object.

## Contract and Products

Component	Description
C1-ConsumerContractAdd	Used to add a Consumer Contract.  This component invokes the ATC1ConsumerContract Inbound Web Service using the C1-ConsumerContract Business Object.
C1-ConsumerContractDelete	Used to delete a Consumer Contract.  This component invokes the ATC1ConsumerContract Inbound Web Service using the C1-ConsumerContract Business Object.
C1-ConsumerContractRead	Used to read a Consumer Contract.  This component invokes the ATC1ConsumerContract Inbound Web Service using the C1-ConsumerContract Business Object.
C1-ConsumerContractUpdate	Used to update a Consumer Contract.  This component invokes the ATC1ConsumerContract Inbound Web Service using the C1-ConsumerContract Business Object.
C1-GetCSRContract	Used for retrieving the Contract ID from Customer Service Request Contract.  This component invokes the ATC1GetCSRContract Inbound Web Service using the C1-GETCSRCON Business Service.
C1-GetCSRContractProduct	Used for retrieving the Contract Product ID from Customer Service Request Contract.  This component invokes the ATC1GetCSRProduct Inbound Web Service using the C1-GETCSRPRO Business Service.
C1-CSRPersonAdd	Used for Customer Service Request Person Add.  This component invokes the ATC1CSRPerson Inbound Web Service using the C1-ContractChangeReqPersnBasic Business Object.

Component	Description
C1-CSRPersonDelete	Used for Customer Service Request Person Delete.  This component invokes the ATC1CSRPerson Inbound Web Service using the C1-ContractChangeReqPersnBasic Business Object.
C1-CSRPersonRead	Used for Customer Service Request Person Read.  This component invokes the ATC1CSRPerson Inbound Web Service using the C1-ContractChangeReqPersnBasic Business Object.
C1-CSRPersonUpdate	Used for Customer Service Request Person Update.  This component invokes the ATC1CSRPerson Inbound Web Service using the C1-ContractChangeReqPersnBasic Business Object.
C1-CSRProductRead	Used for retrieving the Product ID from Customer Service Request Product.  This component invokes the ATC1GetCSRProduct Inbound Web Service using the C1-GETCSRPRO Business Service.
C1-GetCSRPerson	Used for retrieving the Person ID from Customer Service Request Person.  This component invokes the ATC1GetCSRPerson Inbound Web Service using the C1-GETCSRPER Business Service.
C1-CSRAccountAdd	Used for Customer Service Request Account Add.  This component invokes the ATC1CSRAccount Inbound Web Service using the C1-ContractChngeReqAcctBasic Business Object.
C1-CSRAccountDelete	Used for Customer Service Request Account Delete.  This component invokes the ATC1CSRAccount Inbound Web Service using the C1-ContractChngeReqAcctBasic Business Object.
C1-CSRAccountRead	Used for Customer Service Request Account Read.  This component invokes the ATC1CSRAccount Inbound Web Service using the C1-ContractChngeReqAcctBasic Business Object.
C1-CSRAccountUpdate	Used for Customer Service Request Account Update.  This component invokes the ATC1CSRAccount Inbound Web Service using the C1-ContractChangeReqPersnBasic Business Object.

Component	Description
C1-CSRPremiseAdd	Used for Customer Service Request Premise Add.  This component invokes the ATC1CSRPremise Inbound Web Service using the C1-ContractChngeReqPremiseBasic Business Object.
C1-CSRPremiseDelete	Used for Customer Service Request Premise Delete.  This component invokes the ATC1CSRPremise Inbound Web Service using the C1-ContractChngeReqPremiseBasic Business Object.
C1-CSRPremiseRead	Used for Customer Service Request Premise Read.  This component invokes the ATC1CSRPremise Inbound Web Service using the C1-ContractChngeReqPremiseBasic Business Object.
C1-CSRPremiseUpdate	Used for Customer Service Request Premise Update.  This component invokes the ATC1CSRPremise Inbound Web Service using the C1-ContractChngeReqPremiseBasic Business Object.
C1-GetCSRPremise	Used for retrieving the Premise ID from Customer Service Request Premise.  This component invokes the ATC1GetCSRPremise Inbound Web Service using the C1-GETCSRPRE Business Service.
C1-AddCSR	Used for adding a Customer Service Request record.  This component invokes the ATC1CreateCSR Inbound Web Service using the C1-AddCoChRe Service Script.
C1-CSRContractAdd	Used for Customer Service Request for Contract Add.  This component invokes the ATC1CSRContract Inbound Web Service using the C1-ContractChangeReqContRoot Business Object.
C1-CSRContractDelete	Used for Customer Service Request for Contract Delete.  This component invokes the ATC1CSRContract Inbound Web Service using the C1-ContractChangeReqContRoot Business Object.
C1-CSRContractRead	Used for Customer Service Request for Contract Delete.  This component invokes the ATC1CSRContract Inbound Web Service using the C1-ContractChangeReqContRoot Business Object.

Component	Description
C1-CSRContractUpdate	<p>Used for Customer Service Request for Contract Update.</p> <p>This component invokes the ATC1CSRContract Inbound Web Service using the C1-ContractChangeReqCnProdRoot Business Object.</p>
C1-CSRContractProductDelete	<p>Used for Customer Service Request for Contract Product Delete.</p> <p>This component invokes the ATC1CSRContractProduct Inbound Web Service using the C1-ContractChangeReqCnProdRoot Business Object.</p>
C1-CSRContractProductRead	<p>Used for Customer Service Request for Contract Product Delete.</p> <p>This component invokes the ATC1CSRContractProduct Inbound Web Service using the C1-ContractChangeReqCnProdRoot Business Object.</p>
C1-CSRContractProductUpdate	<p>Used for Customer Service Request for Contract Product Delete.</p> <p>This component invokes the ATC1CSRContractProduct Inbound Web Service using the C1-ContractChangeReqCnProdRoot Business Object.</p>
C1-GetCSRAccount	<p>Used for retrieving the Account ID from Customer Service Request Person.</p> <p>This component invokes the ATC1GetCSRAccount Inbound Web Service using the C1-GETCSRACC Business Service.</p>
C1-CSRContractProductAdd	<p>Used for Customer Service Request for Contract Product Add.</p> <p>This component invokes the ATC1CSRContractProduct Inbound Web Service using the C1-ContractChangeReqCnProdRoot Business Object.</p>
C1-CSRServiceLocationMktProcAdd	<p>Used for Customer Service Request for Service Location Market Process Add.</p> <p>This component invokes the ATC1CSRServiceLocationMktProc Inbound Web Service using the C1-CsrSvcLocMarketProcessRoot Business Object.</p>

Component	Description
C1- CSRServiceLocationMktProcDelete	Used for Customer Service Request for Service Location Market Process Delete.  This component invokes the ATC1CSRServiceLocationMktProc Inbound Web Service using the C1-CsrSvcLocMarketProcessRoot Business Object.
C1-CSRServiceLocationMktProcRead	Used for Customer Service Request for Service Location Market Process Read.  This component invokes the ATC1CSRServiceLocationMktProc Inbound Web Service using the C1-CsrSvcLocMarketProcessRoot Business Object.
C1- CSRServiceLocationMktProcUpdate	Used for Customer Service Request for Service Location Market Process Update.  This component invokes the ATC1CSRServiceLocationMktProc Inbound Web Service using the C1-CsrSvcLocMarketProcessRoot Business Object.
C1-GetCSRServiceLocation	Used for Update Service Location.  This component invokes the ATC1GetCSRServiceLocation Inbound Web Service using the C1-GETCSRSER Business Service.
C1-GetBOStatus	This business service receives a maintenance object code and primary key(s) and returns its business object along with its lifecycle business object and current status, if applicable.  This component invokes the ATC1GetBOStatus Inbound Web Service using the F1-DetermineBo Business Service.
C1-RegistrationPointAdd	Used to Add Registration Point.  This component invokes the ATC1RegistrationPoint Inbound Web Service using the C1-RegistrationPoint Business Object.
C1-RegistrationPointDelete	Used to Delete Registration Point.  This component invokes the ATC1RegistrationPoint Inbound Web Service using the C1-RegistrationPoint Business Object.

Component	Description
C1-RegistrationPointRead	Used to Read Registration Point.  This component invokes the ATC1RegistrationPoint Inbound Web Service using the C1-RegistrationPoint Business Object.
C1-RegistrationPointUpdate	Used to Update Registration Point.  This component invokes the ATC1RegistrationPoint Inbound Web Service using the C1-RegistrationPoint Business Object.
C1-ContractChangeRequestAdd	Used to Add Contract Change Request.  This component invokes the ATC1ContractChangeRequest Inbound Web Service using the C1-ContractChangeRequest Business Object.
C1-ContractChangeRequestDelete	Used to Delete Contract Change Request.  This component invokes the ATC1ContractChangeRequest Inbound Web Service using the C1-ContractChangeRequest Business Object.
C1-ContractChangeRequestRead	Used to Read Contract Change Request.  This component invokes the ATC1ContractChangeRequest Inbound Web Service using the C1-ContractChangeRequest Business Object.
C1-ContractChangeRequestUpdate	Used to Update Contract Change Request.  This component invokes the ATC1ContractChangeRequest Inbound Web Service using the C1-ContractChangeRequest Business Object.
C1-GetEligibleProductContractType	Used for retrieving the list of Eligible Products for a Contract Type.  This component invokes the ATC1GetEligibleProduct Inbound Web Service using the C1-RetElPdCT Business Service.
C1-GetProdAttributeContract	Used for retrieving the product attributes for a Contract.  This component invokes the ATC1GetProdAttributeContract Inbound Web Service using the C1-RePrAttCt Service Script.

Component	Description
C1-GetProductAttributes	Used for retrieving the product attributes for Operand Values.  This component invokes the ATC1ProdAttOperandValues Inbound Web Service using the C1-RetPAttOV Service Script.
C1-TransitionBOStatus	Used to transition Business Object status.  This component invokes the ATC1TransitionBOStatus Inbound Web Service using the C1-TransitBO Service Script.

## Umbrella Agreement

Component	Description
C1-UmbrellaAgreementAdd	Used to create an Umbrella Agreement record.  This component invokes the ATC1UmbrellaAgreement Inbound Web Service using the C1UmbrellaAgreementPhysical Business Object.
C1-UmbrellaAgreementRead	Used to read an existing Umbrella Agreement record.  This component invokes the ATC1UmbrellaAgreement Inbound Web Service using the C1UmbrellaAgreementPhysical Business Object.
C1-UmbrellaAgreementUpdate	Used to update an existing Umbrella Agreement record.  This component invokes the ATC1UmbrellaAgreement Inbound Web Service using the C1UmbrellaAgreementUpdate Business Object.
C1-UmbrellaAgreementDelete	Used to delete an existing Umbrella Agreement record.  This component invokes the ATC1UmbrellaAgreement Inbound Web Service using the C1UmbrellaAgreementPhysical Business Object.
C1-TermsOfServiceAdd	Used to create a Terms of Service record.  This component invokes the ATC1TermsOfService Inbound Web Service using the C1TermsOfServicePhysical Business Object.

---

<b>Component</b>	<b>Description</b>
C1-TermsOfServiceRead	Used to read an existing Terms of Service record.  This component invokes the ATC1TermsOfService Inbound Web Service using the C1TermsOfServicePhysical Business Object.
C1-TermsOfServiceUpdate	Used to update an existing Terms of Service record.  This component invokes the ATC1TermsOfService Inbound Web Service using the C1TermsOfServiceUpdate Business Service.
C1-TermsOfServiceDelete	Used to delete an existing Terms of Service record.  This component invokes the ATC1TermsOfService Inbound Web Service using the C1TermsOfServicePhysical Business Object.

---



## Usage

Component	Description
C1-GetUsageId	<p>Used to get the usage request ID of given a person name.</p> <p>This component invokes the ATC1GetUsageId Inbound Web Service using the C1-GetUsageId Business Service.</p>
C1-UsageReqCyclicalBillingRead	<p>Used to read a Usage Request Cyclical Billing record.</p> <p>This component invokes the ATC1UsageReqCyclicalBillingRead Inbound Web Service using the C1-UsageRequestCyclicalBilling Business Object.</p>
C1-UsageRequestNonCyclicalRead	<p>Used to read a Usage Request Non-Cyclical Billing record.</p> <p>This component invokes the ATC1UsageRequestNonCyclical Inbound Web Service using the C1-UsageRequestNonCyclical Business Object.</p>
X1-UsageAndChargeRequestAdd	<p>Used to add a Usage and Charge Request record.</p> <p>This component invokes the ATX1UsageAndChargeRequest Inbound Web Service using the X1-UsageAndChargeRequest Business Object.</p>
X1-UsageAndChargeRequestDelete	<p>Used to delete a Usage and Charge Request record.</p> <p>This component invokes the ATX1UsageAndChargeRequest Inbound Web Service using the X1-UsageAndChargeRequest Business Object.</p>
X1-UsageAndChargeRequestRead	<p>Used to read a Usage and Charge Request record.</p> <p>This component invokes the ATX1UsageAndChargeRequest Inbound Web Service using the X1-UsageAndChargeRequest Business Object.</p>
X1-UsageAndChargeRequestUpdate	<p>Used to update a Usage and Charge Request record.</p> <p>This component invokes the ATX1UsageAndChargeRequest Inbound Web Service using the X1-UsageAndChargeRequest Business Object.</p>

Component	Description
X1-VectorMathNonMeterAdd	Used to add a Usage and Charge Request record.  This component invokes the ATX1VectorMathNonMeter Inbound Web Service using the X1-VectorMathNonMeter Business Object.
X1-VectorMathNonMeterDelete	Used to delete a Usage and Charge Request record.  This component invokes the ATX1VectorMathNonMeter Inbound Web Service using the X1-VectorMathNonMeter Business Object.
X1-VectorMathNonMeterRead	Used to read a Usage and Charge Request record.  This component invokes the ATX1VectorMathNonMeter Inbound Web Service using the X1-VectorMathNonMeter Business Object.
X1-VectorMathNonMeterUpdate	Used to update a Usage and Charge Request record.  This component invokes the ATX1VectorMathNonMeter Inbound Web Service using the X1-VectorMathNonMeter Business Object.

## CX REST API

Component	Description
C1-AccountDataRestIWS	Used to get an Account Financial Data.  This component invokes the C1-AccountData Inbound Web Service using the C1FinDetails Service Script.
C1-ActionBudgetRestIWS	Used to update Budget.  This component invokes the C1-Budget Inbound Web Service using the C1BudgetData Service Script.
D1-InstallEventIWS	Used to get an Install event.  This component invokes the D1-GtInstEve Service Script using the D1-InstallEvent Inbound Web Service.

Component	Description
C1-ActionCutProcessRestIWS	Used to update Cut process.  This component invokes the C1-CutProcess Inbound Web Service using the C1CutProcess Service Script.
C1-ActionOverdueProcessRestIWS	Used to update Overdue process.  This component invokes the C1-OverdueProcess Inbound Web Service using the C1OverduePro Service Script.
C1-AdjustmentSummaryRestIWS	Used to retrieve Adjustment Summary.  This component invokes the C1-Adjustment Inbound Web Service using the C1AdjSumry Service Script.
C1-BillSegmentSummaryRestIWS	Used to retrieve Bill Segment Summary.  This component invokes the C1-BillSegment Inbound Web Service using the C1BilSegSmry Service Script.
C1-ExpandTreeRestIWS	Used to Expand Tree.  This component invokes the F1-ExpandTree Inbound Web Service using the F1-ExpandTree Service Script.
C1-MultiAccountStatisticsRestIWS	Used to Get Multi Account Statistics.  This component invokes the C1-AccountData Inbound Web Service using the C1FinStats Service Script.
C1-MultiAccountUsageSummaryRestIWS	Used to Get Multi Account Usage Summary.  This component invokes the C1-BilledUsageData Inbound Web Service using the C1MIACUsgSum Service Script.
C1-PaymentSummaryRestIWS	Used to Retrieve the Payment Summary.  This component invokes the C1-Payment Inbound Web Service using the C1-UpdPymt Service Script.
C1-PersonSearchRestIWS	Used to search a Person.  This component invokes the C1-PersonSearch Inbound Web Service using the C1PersonSrch Service Script.

Component	Description
C1-SearchAccountPremisesRestIWS	Used to Search Account Premises.  This component invokes the C1-BillingContext Inbound web Service using the C1-GetPremAcc Service Script.
C1-ServiceAgreementSearchRestIWS	Used to search for Service Agreement.  This component invokes the C1-ServiceAgreement Inbound Web Service using the C1SASearhSer Service Script.
C1-BillSearchRestIWS	Used to search Bill.  This component invokes the C1-Bill Inbound Web Service using the C1BillsForAc Service Script.
C1-BillSegmentsSearchRestIWS	Used to search Bill Segment.  This component invokes the C1-BillSegment Inbound Web Service using the C1BilSegSrch Service Script.
C1-BillSummaryRestIWS	Used to get Bill Summary.  This component invokes the C1-Bill Inbound Web Service using the C1BillSumry Service Script.
C1-BusinessPersonQueriesSummary RestIWS	Used to retrieve Business Person Queries.  This component invokes the C1PersonQueries Inbound Web Service using the C1PersonSumm Service Script.
C1-BusinessSearch	Used to search CX4U Key Account Mgt. (KAM)  This component invokes the C1-BusinessSearch Inbound Web Service using the C1BusinSrch Service Script.
C1-EntityReferencesRestIWS	Used to support of selected CX4U Entities.  This component invokes the C1-EntityReferences Inbound Web Service using the C1EntRefSumm Service Script.
C1-GetCollectionProcessRestIWS	Used to get a collection process.  This component invokes the C1-CollectionProcess Inbound Web Service using the C1CollProces Service Script.
C1-GetLandlordAgreementRestIWS	Used to get Landlord Agreement.  This component invokes the C1-LandordAgreement Inbound Web Service using the C1LandLordAg Service Script.

Component	Description
C1-DeleteLandlordAgreement	Used to delete a Landlord record.  This component invokes the C1-LandlordAgreement Inbound Web Service using the C1LandlordAg Service Script.
C1-GetSeveranceProcessRestIWs	Used to lead to the severance of a service agreement.  This component invokes the C1-SeveranceProcess Inbound Web Service using the C1SeveraProc Service Script.
C1-PayPlanRestIWS	Used to create a Payment Tender.  This component invokes the C1-PayPlan Inbound Web Service using the C1-PayPlan Service Script.
C1-ServicePointSearchRestIWS	Used to search Service Point.  This component invokes the C1-ServicePointSearch Inbound Web Service using the C1ServPtSrch Script.
C1-UpdateLandlordAgreementRestIWS	Used to update Landlord Agreement.  This component invokes the C1-LandordAgreement Inbound Web Service using the C1LandLordAg Service Script.
C1-CaseSearchRestIWS	Used to search Case.  This component invokes the C1-Case Inbound Web Service using the C1CaseSearch Service Script.
C1-GetServiceAgreementStatistics_GG_NEE	Used to Service Agreement Statistics.  This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-ServiceAg Service Script.
C1-GetServiceAgreementStatistics_GG_NENE	Used to Get Service Agreement Statistics.  This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-ServiceAg Service Script.
C1-GetWebUserAccount	Used to Get Web User Account.  This component invokes the C1-WebUserAccount Inbound Web Service using the C1-CxWbUsrAt Service Script.
C1-CreateWebUserAccount	Used to create a Web User Account.  This component invokes the C1-WebUserAccount Inbound Web Service using the C1-CxWbUsrAtService Script.

Component	Description
C1-CreateWriteOffProcessRestIWS	Used to create a Write Off process.  This component invokes the C1-WriteOffProcess Inbound Web Service using the C1WriteOffPr Service Script.
C1-GetAccountFinancialHistory	Used to get Account Financial History.  This component invokes the C1-Bill Inbound Web Service using the C1-CreBill Service Script.
C1-GetBillBillSegmentRestIWS	Used to get a bill's Bill Segments.  This component invokes the C1-BillSegment Inbound Web Service using the C1-GetBilSeg Service Script.
C1-GetBillRestIWS	Used to get a Bill.  This component invokes the C1-Bill Inbound Web Service using the C1-GetBill Service Script.
C1-GetBillSegmentRestIWS	Used to get Bill Segment.  This component invokes the C1-BillSegment Inbound Web Service using the C1-BillSegm Service Script.
C1-GetBudgetRestIWS	Used to get a Budget.  This component invokes the C1-Budget Inbound Web Service using the C1BudgetDeta Service Script.
C1-GetCutProcessRestIWS	Used to get Cut process.  This component invokes the C1-CutProcess Inbound Web Service using the C1CutProcess Service Script.
C1-GetLandlordAgreementsPremisesList	Used to get Land Lord Agreement Premise List.  This component invokes the C1-LandlordAgreement Inbound Web Service using the C1LandlordAg Service Script.
C1-GetOverdueProcessRestIWS	Used to get Overdue process.  This component invokes the C1-OverdueProcess Inbound Web Service using the C1OverduePro Service Script.
C1-GetPaymentChar	Used to get Payment Characteristics.  This component invokes the C1-Payment Inbound Web Service using the C1-GtPytChar Service Script.

Component	Description
C1-GetPaymentPaySegmentRestIWS	Used to get Payment Segment in payment.  This component invokes the C1-Payment Inbound Web Service using the C1-CxPayment Service Script.
C1-GetWriteOffProcessRestIWS	Used to get Write Off process.  This component invokes the C1-WriteoffProcess Inbound Web Service using the C1WriteOffPr Service Script.
C1-PaymentDelete	Used to Delete Payment.  This component invokes the C1-Payment Inbound Web Service using the C1-DltPaym Service Script.
C1-PayPlanUpdate	Used to Update Pay Plan.  This component invokes the C1-PayPlan Inbound Web Service using the C1PayPlan Service Script.
C1-PaymentEventGet	Used to get Payment Event.  This component invokes the C1-PaymentEvent Inbound Web Service using the C1-PayEvent Service Script.
C1-PaymentEventPaymentsRestIWS	Used to get payments of Payment Event.  This component invokes the C1-PaymentEvent Inbound Web Service using the C1PayEvtPay Service Script.
C1-PaymentEventPost	Used to create Payment Event.  This component invokes the C1-PaymentEvent Inbound Web Service using the C1-PayEvent Service Script.
C1-PaymentGet	Used to get Payment.  This component invokes the C1-Payment Inbound Web Service using the C1-GetPaymnt Service Script.
C1-PaymentPost	Used to create Payment.  This component invokes the C1-Payment Inbound Web Service using the C1-CrPymtHdr Service Script.
C1-PaymentPut	Used to update Payment.  This component invokes the C1-Payment Inbound Web Service using the C1-UpdPymt Service Script.

Component	Description
C1-PaymentTenderRestIWS	Used to get Payment Tender.  This component invokes the C1-PaymentTender Inbound Web Service using the C1-GetPayTen Service Script.
C1-ServicePointCreate	Used to create a Service Point.  This component invokes the C1-ServicePoint Inbound Web Service using the C1-CreateSP Service Script.
C1-ServicePointDelete	Used to delete a Service Point.  This component invokes the C1-ServicePoint Inbound Web Service using the C1-DeleteSP Service Script.
C1-ServicePointPut	Used to update a Service Point.  This component invokes the C1-ServicePoint Inbound Web Service using the C1-UpdateSP Service Script.
C1-ServicePointRestIWS	Used to get a Service Point and it's child APIs.  This component invokes the C1-ServicePoint Inbound Web Service using the C1-GetSP Service Script.
C1-UpdateBillCharacteristicRestIWS	Used to update Bill Characteristics.  This component invokes the C1-Bill Inbound Web Service using the C1-CrBilChar Service Script.
C1-UpdateBillMessagesRestIWS	Used to update Bill Messages.  This component invokes the C1-Bill Inbound Web Service using the C1-CrBilMsg Service Script.
C1-UpdateBillRestIWS	Used to update Bill.  This component invokes the C1-Bill Inbound Web Service using the C1-CreBill Service Script.
C1-UpdateBillRoutingsRestIWS	Used to update Bill Routings.  This component invokes the C1-Bill Inbound Web Service using the C1-CrBilRtng Service Script.
C1-UpdateBillSegmentItems	Used to update Bill Segments Items.  This component invokes the C1-BillSegment Inbound Web Service using the C1ActBillSeg Service Script.



Component	Description
C1-UpdateBillSegmentMessages	Used to update Bill Segments Messages.  This component invokes the C1-BillSegment Inbound Web Service using the C1ActBillSeg Service Script.
C1-UpdateCutProcessRestIWS	Used to update Cut process.  This component invokes the C1-CutProcess Inbound Web Service using the C1CutProcess Service Script.
C1-UpdateOverdueProcessRestIWS	Used to update Overdue process.  This component invokes the C1-OverdueProcess Inbound Web Service using the C1OverduePro Service Script.
C1-UpdatePaymentTender	Used to update Payment Tender.  This component invokes the C1-PaymentTender Inbound Web Service using the C1-UpPyTndrs Service Script.
C1-UpdatePaymentTenderChar	Used to update Payment Tender Char.  This component invokes the C1-PaymentTender Inbound Web Service using the C1-UpPyTndCh Service Script.
C1-UpdatePersonCharacteristics	Used to update a Person Characteristics.  This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonIdentifiers	Used to update a Person Identifiers.  This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonNames	Used to update a Person Name.  This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonNameOptions	Used to update Person Name Options.  This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonPhones	Used to update Person Phones.  This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.

Component	Description
C1-UpdatePersonRelationships	Used to update Person Relationships.  This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonSeasonalAddress	Used to update a Person Seasonal Address.  This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdateServicePointOperationAreas	Used to update Service Point Operation Areas.  This component invokes the C1-ServicePoint Inbound Web Service using the C1-UpdateSP Service Script.
C1-UpdateWriteOffProcessRestIWS	Used to update Write Off process.  This component invokes the C1-WriteoffProcess Inbound Web Service using the C1WriteOffPr Service Script.
CX-BillPayHistoryRetriever	Views Bill or Payment History.  This component invokes the CXBillPayHistoryRetriever Inbound Web Service using the WX-BillPayHs Service Script.
CX-BillSegmentHistoryRetriever	Bill Segment History -Amount and Quantity.  This component invokes the CXBillSegmentHistoryRetriever Inbound Web Service using the CX-BsegHist Service Script.
CX-AccountChargesSummaryRetriever	Retrieves Account Charges Summary.  This component invokes the CXAccountChargesSummaryRetriever Inbound Web Service using the
CX-BillView	View Bill.  This component invokes the CXBillView Inbound Web Service using the WX-ViewBill Service Script.
CX-CancelSchedPay	Cancels scheduled One-Time Payment.  This component invokes the CXCancelSchedPay Inbound Web Service using the WX-CanSchPay Service Script.
CX-ConnectedAccountsDetails	Retrieves the List of Connected Accounts.  This component invokes the CXConnectedAccountsDetails Inbound Web Service using the CXConAccDtls Service Script.

Component	Description
CX-ConnectedAccountsWithGuests	<p>Connected accounts with guest users.</p> <p>This component invokes the CXConnectedAccountsWithGuests Inbound Web Service using the CXConActWGst Service Script.</p>
CX-ContextInfo	<p>Gets Self Service Context Information.</p> <p>This component invokes the CXContextInfo Inbound Web Service using the CX-CntxtInfo Service Script.</p>
CX-CreateMeterRead	<p>Creates Meter Read.</p> <p>This component invokes the CXCreateMeterRead Inbound Web Service using the WX-CreSSMR Service Script.</p>
CX-FinancialHistoryDownload	<p>Account's Financial History Download.</p> <p>This component invokes the CXFinancialHistoryDownload Inbound Web Service using the CX-AcctFinHD Service Script.</p>
CX-FinancialHistoryRetriever	<p>Gets account's Financial History.</p> <p>This component invokes the CXFinancialHistoryRetriever Inbound Web Service using the CX-AcctFinHs Service Script.</p>
CX-FormsList	<p>Forms List.</p> <p>This component invokes the CXFormsList Inbound Web Service using the CX-FormsList Service Script.</p>
CX-FormsManagement	<p>Forms Management.</p> <p>This component invokes the CXFormsManagement Inbound Web Service using the WX-FormsMgmt Service Script.</p>
CX-GetConsumptionSummary	<p>Gets Consumption Summary.</p> <p>This component invokes the CXGetConsumptionSummary Inbound Web Service using the WX-GetConS Service Script.</p>
CX-GetDSSAlerts	<p>Returns DSS Alerts.</p> <p>This component invokes the CXGetDSSAlerts Inbound Web Service using the CX-SSAlerts Service Script.</p>

Component	Description
CX-GetMeteredOrBDSAs	<p>List of Metered or Bill Determinant SA.</p> <p>This component invokes the CXGetMeteredOrBDSAs Inbound Web Service using the CX-RETSASPCL Service Script.</p>
CX-GetSelfServiceLabels	<p>Retrieves Self-Service Field Labels.</p> <p>This component invokes the CXGetSelfServiceLabels Inbound Web Service using the CX-GetSSLbl Service Script.</p>
CX-AutoPaySetup	<p>Auto Pay Setup.</p> <p>This component invokes the CXAutoPaySetup Inbound Web Service using the WX-ApaySet Service Script.</p>
CX-GetSelfServiceDropdowns	<p>Retrieve Self-Service Dropdowns.</p> <p>This component invokes the CXGetSelfServiceDropDowns Inbound Web Service using the WX-GetSSDD Service Script.</p>
CX-GetSelfServiceLabels_upd	<p>Retrieve Self-Service Field Labels.</p> <p>This component invokes the CXGetSelfServiceLabels Inbound Web Service using the CX-GetSSLbl Service Script.</p>
CX-MakePayment_upd	<p>Multi Account Payments.</p> <p>This component invokes the CXMakePayment Inbound Web Service using the WX-MakePay Service Script.</p>
CX-MaintainCommPreferences	<p>Maintains Communication Preferences.</p> <p>This component invokes the CXMaintainCommPreferences Inbound Web Service using the WX-CommPref Service Script.</p>
CX-MaintainMailingAddressInfo	<p>Maintains Mailing Address Information.</p> <p>This component invokes the CXMaintainMailingAddressInfo Inbound Web Service using the WX-MAddMain Service Script.</p>
CX-MaintainPersonLanguageTimeZone	<p>Maintains Person Language and Time Zone.</p> <p>This component invokes the CXMaintainPersonLanguageTimeZone Inbound Web Service using the WX-MPerLngTZ Service Script.</p>

Component	Description
CX-MaintainWebUser	<p>Maintains Self Service Web User.</p> <p>This component invokes the CXMaintainWebUser Inbound Web Service using the CXWebUsrMain Service Script.</p>
CX-MaintainWebUserAccount	<p>Maintains Self Service Web User Account.</p> <p>This component invokes the CXMaintainWebUserAccount Inbound Web Service using the CXWebUsrAcct Service Script.</p>
CX-MakePayment	<p>Multi Account Payments.</p> <p>This component invokes the CXMakePayment Inbound Web Service using the WX-MakePay Service Script.</p>
CX-ManageCharities	<p>Manages Auto Pay Charities.</p> <p>This component invokes the CXManageCharities Inbound Web Service using the C1PrCChrtyAP Service Script.</p>
CX-ManagePaymentOptions	<p>Manages Self-Service Payment Options.</p> <p>This component invokes the CXManagePaymentOptions Inbound Web Service using the C1MngPayOpt Service Script.</p>
CX-PaymentExtensionRequest	<p>Payment Extension Request.</p> <p>This component invokes the CXPaymentExtensionRequest Inbound Web Service using the C1ProcPayExt Service Script.</p>
CX-PreferredPayDateRequest	<p>Processes Preferred Pay Date Request.</p> <p>This component invokes the CXPreferredPayDateRequest Inbound Web Service using the C1PrefPayDt Service Script.</p>
CX-PremiseSearch	<p>Premise Search.</p> <p>This component invokes the CXPremiseSearch Inbound Web Service using the WX-PremSrch Service Script.</p>
CX-ProcessBudgetRequest	<p>Process Budget Request.</p> <p>This component invokes the CXProcessBudgetRequest Inbound Web Service using the WX-BudgetReq Service Script.</p>

Component	Description
CX-ProcessInvitation	<p>Process Invitation.</p> <p>This component invokes the CXProcessInvitation Inbound Web Service using the CXProcInvite Service Script.</p>
CX-ProcessPayArrangementRequest	<p>Processes Payment Arrangement Request.</p> <p>This component invokes the CXProcessPayArrangementRequest Inbound Web Service using the WX-PayArrReq Service Script.</p>
CX-ProcessStartStopRequest	<p>Processes Start Stop Request.</p> <p>This component invokes the CXProcessStartStopRequest Inbound Web Service using the WX-StrStpReq Service Script.</p>
CX-RateAnalysis	<p>Performs Rate Analysis.</p> <p>This component invokes the CXRateAnalysis Inbound Web Service using the WX-RateAnlys Service Script.</p>
CX-RetrieveScalarUsage	<p>Retrieves Scalar Usage.</p> <p>This component invokes the CXRetrieveScalarUsage Inbound Web Service using the WX-RetScaUsg Service Script.</p>
CX-SetBillNotifyPreference	<p>Sets up Billing Notification Preferences.</p> <p>This component invokes the CXSetBillNotifyPreference Inbound Web Service using the WX-BNPSet Service Script.</p>
CX-SetNotificationPreferences	<p>Sets Notification Preferences.</p> <p>This component invokes the CXSetNotificationPreferences Inbound Web Service using the WX-SetNtPref Service Script.</p>
CX-UsageChargesProjected	<p>Retrieves Projected Charges.</p> <p>This component invokes the CXUsageChargesProjected Inbound Web Service using the WX-ProjChrg Service Script.</p>
CX-UsageChargesToDate	<p>Retrieves Usage Charges to Date.</p> <p>This component invokes the CXUsageChargesToDate Inbound Web Service using the WX-UsgChrgDt Service Script.</p>

Component	Description
CX-VerifyAccount	Account Verification (AND/OR).  This component invokes the CXVerifyAccount Inbound Web Service using the CX-VerAcct Service Script.
CX-WebUserSearch	Web User Search.  This component invokes the CXWebUserSearch Inbound Web Service using the CXWebUsrSrch Service Script.
WX-ProcessStartStopRequest	Processes Start Stop Request.  This component invokes the WXProcessStartStopRequest Inbound Web Service using the WX-StrStpReq Service Script.
D1-CreateInstallEvent	Used to create an Install event.  This component invokes the D1-CrInsEven Service Script using the D1-InstallEvent Inbound Web Service.
D1-UpdateInstallEvent	Used to update an Install Event.  This component invokes the D1-UpdInsEve Service Script using the D1-InstallEvent Inbound Web Service.
D1-DeleteInstallEvents	Used to delete an Install Event.  This component invokes the D1-DelInsEve Service Script using the D1-InstallEvent Inbound Web Service.
D1-GetUsageSubscriptionChildRestIWS	Used to get any Usage Subscription child operation.  This component invokes different service scripts using the D1-UsageSubscription web service.
D1-UpdateUsageSubscriptionRestIWS	Used to update an Usage Subscription operation.  This component invokes D1-UpdateUS Service Script using the D1-UsageSubscription web service.
D1-GetUsageTransactionRestIWS	Used to get an Usage Transaction.  This component invokes D1-GtUsgTran Service Script using the D1-UsageTransaction web service.
D1-MeterIWS	Used to get a Meter.  This component invokes the D1-GetMeter Service Script using the D1-Meter Inbound Web Service.

Component	Description
D1-MeterIWSPost	Used to create a Meter.  This component invokes the D1-CreateMtr Service Script using the D1-Meter Inbound Web Service.
D1-MeterIWSPut	Used to update a Meter.  This component invokes the D1-UpdateMtr Service Script using the D1-Meter Inbound Web Service.
D1-MeterIWSDelete	Used to delete a Meter.  This component invokes the D1-DeleteMtr Service Script using the D1-Meter Inbound Web Service.
D1-ServicePointRestIWS	Used to get a Service Point.  This component invokes the D1-GetSPoint Service Script using the D1-ServicePoint Inbound Web Service.
D1-CreateServicePointRestIWS	Used to create a Service Point.  This component invokes the D1-CreateSP Service Script using the D1-ServicePoint Inbound Web Service.
D1-UpdateServicePointRestIWS	Used to update a Service Point.  This component invokes the D1-UpdateSPt Service Script using the D1-ServicePoint Inbound Web Service.
D1-DeleteServicePointRestIWS	Used to delete a Service Point.  This component invokes the D1-DeleteSP Service Script using the D1-ServicePoint Inbound Web Service.
D1-CreateUsageSubscriptionRestIWS	Used to create a Usage Subscription.  This component invokes the D1-CreateUS Service Script using the D1-UsageSubscription Inbound Web Service.
D1-DeleteUsageSubscriptionRestIWS	Used to delete a Usage Subscription.  This component invokes the D1-DeleteUS Service Script using the D1-UsageSubscription Inbound Web Service.
D1-GetUsageSubscriptionRestIWS	Used to get a Usage Subscription.  This component invokes D1-GetUsgSub script using D1-UsageSubscription Web Service.



Component	Description
D1-UsageTransactionDelete	Used to delete a Usage Transaction.  This component invokes the D1-DelUsgTrn Script using the D1-UsageTransaction Inbound Web Service.
D1-UsageTransactionGet	Used to get a Usage Transaction.  This component invokes D1-GtUsgTran Service Script using the D1-UsageTransaction Web Service.
D1-UsageTransactionPost	Used to create a Usage Transaction.  This component invokes D1-CrUsgTran Service Script using the D1-UsageTransaction Inbound Web Service.
D1-UsageTransactionActionRestIWS	Used to update UT status. This component invokes the D1ActUsgTran Service Script using the D1-UsageTransactionActionRestIWS.
D1-UsageTransactionPut	Used to update a Usage Transaction.  This component invokes D1-UpUsgTran Service Script using the D1-UsageTransaction IWS.
D1-ItemIWS	Used to get an Item.  This component invokes the D1-GetItem Service Script using the D1-Item Inbound Web Service.
D1-ItemIWSPost	Used to create an Item.  This component invokes the D1-CreateItm Service Script using the D1-Item Inbound Web Service.
D1-ItemIWSPut	Used to update an Item.  This component invokes the D1-UpdItem Service Script using the D1-Item Inbound Web Service.
D1-ItemIWSDelete	Used to delete an Item.  This component invokes the D1-DelItem Service Script using the D1-Item Inbound Web Service.
C1-AccountRestIWS	Used to get an Account & it's child API's.  This component invokes the C1-Account Inbound Web Service using the C1-GtAccount Service Script.
C1-AccountSearchNEERestIWS	Used to Search Account.  This component invokes the C1-Account Inbound Web Service using the C1-CXAccount Service Script.

Component	Description
C1-AccountSearchNENERestIWS	Used to Search Account.  This component invokes the C1-Account Inbound Web Service using the C1-CXAccount Service Script.
C1-CreateAccountRestIWS	Used to create an Account.  This component invokes the C1-Account Inbound Web Service using the C1-CrAccount Service Script.
C1-UpdateAccountRestIWS	Used to update an Account.  This component invokes the C1-Account Inbound Web Service using the C1-UpAccount Service Script.
C1-DeleteAccount	Used to delete an Account.  This component invokes the C1-Account Inbound Web Service using the C1-DelAcc Service Script.
C1-DeleteBill	Used to delete a Bill.  This component invokes the C1-Bill Inbound Web Service using the C1-DeletBill Service Script.
C1-DeleteWebUserAccount	Used to delete a Web User Account.  This component invokes the C1-WebUserAccount Inbound Web Service using the C1-DelWbUsAt Service Script.
C1-PersonRestIWS	Used to get a Person and its child APIs.  This component invokes the C1-Person Inbound Web Service using the C1-GetPerson Service Script.
C1-PersonPost	Used to create a Person.  This component invokes the C1-Person Inbound Web Service using the C1-CrePerson Service Script.
C1-PersonQueriesNEERestIWS	Business Person Query  This component invokes the C1-PersonQueries Inbound Web Service using the C1PersonSumm Service Script.
C1-PersonQueriesNENERestIWS	Business Person Query.  This component invokes the C1-PersonQueries Inbound Web Service using the C1PersonSumm Service Script.

Component	Description
C1-UpdatePerson	Used to update a Person.  This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-DeletePerson	Used to delete a Person.  This component invokes the C1-Person Inbound Web Service using the C1-DelPerson.
C1-CustomerContactRestIWS	Used to get a Customer Contact & it's child API's.  This component invokes the C1-CustomerContact Inbound Web Service using the C1-GetCustCt.
C1-CustomerContactPost	Used to create a Customer Contact.  This component invokes the C1-CustomerContact Inbound Web Service using the C1-CreCustCt Service Script.
C1-CustomerContactPut	Used to update a Customer Contact.  This component invokes the C1-CustomerContact Inbound web Service using the C1-UpdCustCt Service Script.
C1-CustomerContactDelete	Used to delete a Customer Contact.  This component invokes the C1-Person Inbound Web Service using the C1-DelCustCt Service Script.
C1-PremiseRestIWS	Used to get a Premise & its child API's.  This component invokes the C1-Premise Inbound Web Service using the C1-GtPremise Service Script.
C1-CreatePremiseRestIWS	Used to create a Premise.  This component invokes the C1-Premise Inbound Web Service using the C1-CrPremise Service Script.
C1-UpdatePremiseRestIWS	Used to update a Premise.  This component invokes the C1-Premise Inbound Web Service using the C1-UpPremise Service Script.
C1-DeletePremiseRestIWS	Used to delete a Premise.  This component invokes the C1-Premise Inbound Web Service using the C1-DePremise Service Script.

Component	Description
C1-ServiceAgreementBilledUsage_GL_NEE	Used to Update SA Billed Usage GL NEE. This component invokes the C1-ServiceAgreement Inbound web Service using the C1-ServiceAg Service Script.
C1-ServiceAgreementBilledUsage_GL_NENE	Used to Update SA Billed Usage GL NENE. This component invokes the C1-ServiceAgreement Inbound web Service using the C1-ServiceAg Service Script.
C1-ServiceAgreementRestIWS	Used to get a Service Agreement and the child API's. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-GetSA Service Script.
C1-CreateServiceAgreementRestIWS	Used to create a Service Agreement. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-CreateSA Service Script.
C1-UpdateServiceAgreementRestIWS	Used to update a Service Agreement. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-UpdateSA Service Script.
C1-UpdateWebUserAccount	Used to Update Web User Account. This component invokes the C1-WriteoffProcess Inbound Web Service using the C1WriteOffPr Service Script.
C1-WebUserCreate	Used to Create Web User. This component invokes the C1-WebUser Inbound Web Service using the C1-WebUser Service Script.
C1-WebUserDelete	Used to Delete Web User. This component invokes the C1-WebUser Inbound Web Service using the C1-DelWebUsr Service Script.
C1-WebUserGet	Used to Get Web User. This component invokes the C1-WebUser Inbound Web Service using the C1-WebUser Service Script.
C1-WebUserUpdate	Used to Update Web User. This component invokes the C1-WebUser Inbound Web Service using the C1-WebUser Service Script.

Component	Description
C1-DeleteServiceAgreementRestIWS	Used to delete a Service Agreement.  This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-DeleteSA Service Script.

## Market Settlements Management

### Dynamic Aggregation

Component	Description
D1-AggrBilledServiceQuantities	Used to create a Aggregation Billed Service Quantities.  This component invokes the D1-AggrBilledServiceQuantities Business Object using the ATD1 AggrBilledServiceQuantities Inbound Web Service.
D1-AggregationCompositeSet	Used to create a Aggregation Composite Set.  This component invokes the D1-AggregationCompositeSet Business Object using the ATD1 AggregationCompositeSet Inbound Web Service.
D1-AggregationConfig	Used to create a Aggregation Config.  This component invokes the D1-AggregationConfig Business Object using the ATD1AggregationConfig Inbound Web Service.
D1-AggregationFoundationSet	Used to create a Aggregation Foundation Set.  This component invokes the D1-AggregationFoundationSet Business Object using the ATD1AggregationFoundationSet Inbound Web Service.
D1-AggregationGroup	Used to create a Aggregation Group.  This component invokes the D1-AggregationGroup Business Object using the ATD1AggregationGroup Inbound Web Service.
D1-AggregationGroupRun	Used to create a Aggregation Group Run.  This component invokes the D1-AggregationGroupRun Business Object using the ATD1AggregationGroupRun Inbound Web Service.

<b>Component</b>	<b>Description</b>
D1-AggregationIntervalType	Used to create a Aggregation Interval Type.  This component invokes the D1-AggregationIntervalType Business Object using the ATD1AggregationIntervalType Inbound Web Service.
D1-AggregationMasterConfig	Used to create a Aggregation Master Config.  This component invokes the D1-Aggregation Master Config Business Object using the ATD1AggregationMasterConfig Inbound Web Service.
D1-AggregatorComposite	Used to create a Aggregator Composite.  This component invokes the D1-AggregatorComposite Business Object using the ATD1 AggregatorComposite Inbound Web Service.
D1-AggregatorCustomerQuantity	Used to create a Aggregator Customer Quantity.  This component invokes the D1-AggregatorCustomerQuantity Business Object using the ATD1 AggregatorCustomerQuantity Inbound Web Service.
D1-AggregatorInterval	Used to create a AggregatorInterval.  This component invokes the D1-AggregatorInterval Business Object using the ATD1AggregatorInterval Inbound Web Service.
D1-AggregatorItems	Used to create a AggregatorItems.  This component invokes the D1-AggregatorItems Business Object using the ATD1AggregatorItems Inbound Web Service.
D1-AggregatorScalar	Used to create a Aggregator Scalar.  This component invokes the D1-AggregatorScalar Business Object using the ATD1AggregatorScalar Inbound Web Service.
D1-BadgedItemsDataSource	Used to create a Badged Items Data Source.  This component invokes the D1-BadgedItemsDataSource Business Object using the ATD1BadgedItemsDataSource Inbound Web Service.

<b>Component</b>	<b>Description</b>
D1-CriteriaSourceTypeLookup	Used to create a CriteriaSourceTypeLookup.  This component invokes the D1-CriteriaSourceTypeLookup Business Object using the ATD1CriteriaSourceTypeLookup Inbound Web Service.
D1-DataSourceBilledSerQuantity	Used to create a DataSourceBilledSerQuantity.  This component invokes the D1-DataSourceBilledSerQuantity Business Object using the ATD1DataSourceBilledSerQuantity Inbound Web Service.
D1-DataSourceMeasurements	Used to create a DataSourceMeasurements.  This component invokes the D1-DataSourceMeasurements Business Object using the ATD1DataSourceMeasurements Inbound Web Service.
D1-DataSourceSPQuantities	Used to create a DataSourceSPQuantities.  This component invokes the D1-DataSourceSPQuantities Business Object using the ATD1DataSourceSPQuantities Inbound Web Service.
D1-DataSourceMeasurements	Used to create a DataSourceMeasurements.  This component invokes the D1-DataSourceMeasurements Business Object using the ATD1DataSourceMeasurements Inbound Web Service.
D1-DataSourceMeasurementDirect	Used to create a DataSourceMeasurementDirect.  This component invokes the D1-DataSourceMeasurementDirect Business Object using the ATD1DataSourceMeasurementDirect Inbound Web Service.
D1-DataSourceUnbadgedItems	Used to create a DataSourceUnbadgedItems.  This component invokes the D1-DataSourceUnbadgedItems Business Object using the ATD1DataSourceUnbadgedItems Inbound Web Service.
D1-FormulaProductType	Used to create a FormulaProductType.  This component invokes the D1-FormulaProductType Business Object using the ATD1FormulaProductType Inbound Web Service.

Component	Description
D1-MasterDataSnapshotBillTime	<p>Used to create a MasterDataSnapshotBillTime.</p> <p>This component invokes the D1-MasterDataSnapshotBillTime Business Object using the ATD1MasterDataSnapshotBillTime Inbound Web Service.</p>
D1-MasterDataSnapshotRealTime	<p>Used to create a MasterDataSnapshotRealTime.</p> <p>This component invokes the D1-MasterDataSnapshotRealTime Business Object using the ATD1MasterDataSnapshotRealTime Inbound Web Service.</p>
D1-ServicePointQuantity	<p>Used to create a ServicePointQuantity.</p> <p>This component invokes the D1-ServicePointQuantity Business Object using the ATD1ServicePointQuantity Inbound Web Service.</p>
D1-ServicePointQuantityType	<p>Used to create a ServicePointQuantityType.</p> <p>This component invokes the D1-ServicePointQuantityType Business Object using the ATD1ServicePointQuantityType Inbound Web Service.</p>
D2-DynamicOptionIntSetType	<p>Used to create a Dynamic Option SetType.</p> <p>This component invokes the D2-DynamicOptionIntSetType Business Object using the ATD2DynamicOptionIntSetType Inbound Web Service.</p>
D2-ItemAggregatorType	<p>Used to create a ItemAggregatorType.</p> <p>This component invokes the D1-ItemAggregatorType Business Object using the ATD1ItemAggregatorType Inbound Web Service.</p>
D1-InboundMCSetSyncRequest	<p>Used to create a InboundMCSetSyncRequest.</p> <p>This component invokes the D1-InboundMCSetSyncRequest Business Object using the ATD1ItemAggregatorType Inbound Web Service.</p>
D1-MCWithCharacteristics	<p>Used to create a MCWithCharacteristics.</p> <p>This component invokes the D1-MCWithCharacteristics Business Object using the ATD1MCWithCharacteristics Inbound Web Service.</p>



Component	Description
D1-CompleteMCSetBOInbound	Used to create a CompleteMCSetBOInbound.  This component invokes the D1-CompleteMCSetBOInbound Business Object using the ATD1CompleteMCSetBOInbound Inbound Web Service.
D1-CompleteMCSetBO	Used to create a CompleteMCSetBO.  This component invokes the D1-CompleteMCSetBO Business Object using the ATD1CompleteMCSetBO Inbound Web Service.

## Forecasting

Component	Description
D1-DailyProcTimetable	Used to create a DailyProcTimetable.  This component invokes the D1-DailyProcTimetable Business Object using the ATD1DailyProcTimetable Inbound Web Service.
D1-DefinedDatesProcSchedule	Used to create a DefinedDatesProcSchedule.  This component invokes the D1-DefinedDatesProcSchedule Business Object using the ATD1DefinedDatesProcSchedule Inbound Web Service.
D1-DimensionCombination	Used to create a DimensionCombination.  This component invokes the D1-DimensionCombination Business Object using the ATD1DimensionCombination Inbound Web Service.
D1-FactorTemperatureProfile	Used to create a FactorTemperatureProfile.  This component invokes the D1-FactorTemperatureProfile Business Object using the ATD1FactorTemperatureProfile Inbound Web Service.
D1-MCComparisonPeriod	Used to create a MCComparisonPeriod.  This component invokes the D1-MCComparisonPeriod Business Object using the ATD1MCComparisonPeriod Inbound Web Service.

<b>Component</b>	<b>Description</b>
D1-MCComparisonTypeStd	Used to create a MCComparisonTypeStd.  This component invokes the D1-MCComparisonTypeStd Business Object using the ATD1MCComparisonTypeStd Inbound Web Service.
D1-MulVarFacNum	Used to create a MulVarFacNum.  This component invokes the D1-MulVarFacNum Business Object using the ATD1MulVarFacNum Inbound Web Service.
D1-MulVarFacNumVal	Used to create a MulVarFacNumVal.  This component invokes the D1-MulVarFacNumVal Business Object using the ATD1MulVarFacNumVal Inbound Web Service.
D1-MulVarFacProf	Used to create a MulVarFacProf.  This component invokes the D1-MulVarFacProf Business Object using the ATD1MulVarFacProf Inbound Web Service.
D1-MulVarFacProfVal	Used to create a MulVarFacProfVal.  This component invokes the D1-MulVarFacProfVal Business Object using the ATD1MulVarFacProfVal Inbound Web Service.
D1-MulVarFacProcessor	Used to create a MulVarFacProcessor.  This component invokes the D1-MulVarFacProcessor Business Object using the ATD1 MulVarFacProcessor Inbound Web Service.
D1-MulVarFacProcessorBS	Used to create a MulVarFacProcessorBS.  This component invokes the D1-MulVarFacProcessorBS Business Object using the ATD1MulVarFacProcessorBS Inbound Web Service.
D1-SettlementUnit	Used to create a SettlementUnit.  This component invokes the D1-SettlementUnit Business Object using the ATD1SettlementUnit Inbound Web Service.
D1-BadgedItemsDataSource	Used to create a Badged Items Data Source.  This component invokes the D1-BadgedItemsDataSource Business Object using the ATD1BadgedItemsDataSource Inbound Web Service.

Component	Description
D1-StandaloneComparisonInt	Used to create a StandaloneComparisonInt.  This component invokes the D1-StandaloneComparisonInt Business Object using the ATD1StandaloneComparisonInt Inbound Web Service.
D1-StandaloneInterval	Used to create a StandaloneInterval.  This component invokes the D1-StandaloneInterval Business Object using the ATD1StandaloneInterval Inbound Web Service.
D1-StandaloneIntrvlMCType	Used to create a StandaloneIntrvlMCType.  This component invokes the D1-StandaloneIntrvlMCType Business Object using the ATD1StandaloneIntrvlMCType Inbound Web Service.
D2-IntervalAveragingEstimation	Used to create a IntervalAveragingEstimation.  This component invokes the D2-IntervalAveragingEstimation Business Object using the ATD2IntervalAveragingEstimation Inbound Web Service.
D2-IntervalProxyDayEstimation	Used to create a IntervalProxyDayEstimation.  This component invokes the D2-IntervalProxyDayEstimation Business Object using the ATD2IntervalProxyDayEstimation Inbound Web Service.

### Integration Components

Component	Description
D1-InBoundAggGrpSyncReq	Used to create a InBoundAggGrpSyncReq.  This component invokes the D1-InBoundAggGrpSyncReq Business Object using the ATD1InBoundAggGrpSyncReq Inbound Web Service.
D1-MDMSettlementAggrGrpSync	Used to create a MDMSettlementAggrGrpSync.  This component invokes the D1-MDMSettlementAggrGrpSync Business Object using the ATD1MDMSettlementAggrGrpSync Inbound Web Service.

Component	Description
D1-MDMSettlementDCSync	<p>Used to create a MDMSettlementDCSync.</p> <p>This component invokes the D1-MDMSettlementDCSync Business Object using the ATD1MDMSettlementDCSync Inbound Web Service.</p>
D1-MDMSettlementDeviceSync	<p>Used to create a MDMSettlementDeviceSync.</p> <p>This component invokes the D1-MDMSettlementDeviceSync Business Object using the ATD1MDMSettlementDeviceSync Inbound Web Service.</p>
D1-MDMSettlementIESync	<p>Used to create a MDMSettlementIESync.</p> <p>This component invokes the D1-MDMSettlementIESync Business Object using the ATD1MDMSettlementIESync Inbound Web Service.</p>
D1-MDMSettlementMCSync	<p>Used to create a MDMSettlementMCSync.</p> <p>This component invokes the D1-MDMSettlementMCSync Business Object using the ATD1MCComMDMSettlementMCSync Inbound Web Service.</p>
D1-MDMSettlementSPSync	<p>Used to create a MDMSettlementSPSync.</p> <p>This component invokes the D1-MDMSettlementSPSync Business Object using the ATD1MDMSettlementSPSync Inbound Web Service.</p>
D1-SettIntegrationMasterConfig	<p>Used to create a SettIntegrationMasterConfig.</p> <p>This component invokes the D1-SettIntegrationMasterConfig Business Object using the ATD1SettIntegrationMasterConfig Inbound Web Service.</p>
D1-SynchronizationAddDevice	<p>Used to create a SynchronizationAddDevice.</p> <p>This component invokes the D1-SynchronizationAddDevice Business Object using the ATD1SynchronizationAddDevice Inbound Web Service.</p>
D1-SynchronizationAddDC	<p>Used to create a SynchronizationAddDC.</p> <p>This component invokes the D1-SynchronizationAddDC Business Object using the ATD1SynchronizationAddDC Inbound Web Service.</p>

## Market Entities

Component	Description
D1-FixedProfileAward	Used to create a FixedProfileAward.  This component invokes the D1-FixedProfileAward Business Object using the ATD1FixedProfileAward Inbound Web Service.
D1-Market2	Used to create a Market.  This component invokes the D1-Market2 Business Object using the ATD1Market2 Inbound Web Service.
D1-MarketContract	Used to create a MarketContract.  This component invokes the D1-MarketContract Business Object using the ATD1MarketContract Inbound Web Service.
D1-MarketContractType	Used to create a MarketContractType.  This component invokes the D1-MarketContractType Business Object using the ATD1MarketContractType Inbound Web Service.
D1-MarketParticipant	Used to create a MarketParticipant.  This component invokes the D1- MarketParticipant Business Object using the ATD1MarketParticipant Inbound Web Service.
D1-MarketProduct	Used to create a MarketProduct.  This component invokes the D1- MarketProduct Business Object using the ATD1MarketProduct Inbound Web Service.
D1-MarketProductSet	Used to create a MarketProductSet.  This component invokes the D1-MarketProductSet Business Object using the ATD1MarketProductSet Inbound Web Service.
D1-MarketProductType	Used to create a MarketProductType.  This component invokes the D1-MarketProductType Business Object using the ATD1MarketProductType Inbound Web Service.
D1-MktContractType	Used to create a MktContractType.  This component invokes the D1-MktContractType Business Object using the ATD1MktContractType Inbound Web Service.

Component	Description
D1-MPSet	Used to create a MPSet.  This component invokes the D1-MPSet Business Object using the ATD1MPSet Inbound Web Service.
D1- PercentageAward	Used to create a PercentageAward.  This component invokes the D1-PercentageAward Business Object using the ATD1PercentageAward Inbound Web Service.
D1-TrancheAward	Used to create a TrancheAward.  This component invokes the D1- TrancheAward Business Object using the ATD1TrancheAward Inbound Web Service.

### Settlement Calculations

Component	Description
D1-AttributDataSnpshtBillTime	Used to create a AttributDataSnpshtBillTime.  This component invokes the D1-AttributDataSnpshtBillTime Business Object using the ATD1AttributDataSnpshtBillTime Inbound Web Service.
D1-AttributDataSnpshtDaily	Used to create a AttributDataSnpshtDaily  This component invokes the D1-AttributDataSnpshtDaily Business Object using the ATD1AttributDataSnpshtDaily Inbound Web Service.
D1-AttributeDataSnapshotType	Used to create a AttributeDataSnapshotType.  This component invokes the D1-AttributeDataSnapshotType Business Object using the ATD1AttributeDataSnapshotType Inbound Web Service.
D1-AutoReadRegisterType	Used to create a AutoReadRegisterType.  This component invokes the D1-AutoReadRegisterType Business Object using the ATD1AutoReadRegisterType Inbound Web Service.
D1-HowToSendMCInformation	Used to create a HowToSendMCInformation.  This component invokes the D1-HowToSendMCInformation Business Object using the ATD1HowToSendMCInformation Inbound Web Service.

Component	Description
D1-MeasurementDataSnapshotType	<p>Used to create a MeasurementDataSnapshotType.</p> <p>This component invokes the D1-MeasurementDataSnapshotType Business Object using the ATD1MeasurementDataSnapshotType Inbound Web Service.</p>
D1-MarketProductSet	<p>Used to create a MarketProductSet.</p> <p>This component invokes the D1-MarketProductSet Business Object using the ATD1MarketProductSet Inbound Web Service.</p>
D1-ServicePointMktPtLite	<p>Used to create a ServicePointMktPtLite.</p> <p>This component invokes the D1-ServicePointMktPtLite Business Object using the ATD1ServicePointMktPtLite Inbound Web Service.</p>
D1-StandaloneDataRequestMC	<p>Used to create a StandaloneDataRequestMC.</p> <p>This component invokes the D1-StandaloneDataRequestMC Business Object using the ATD1StandaloneDataRequestMC Inbound Web Service.</p>
D1-StandaloneDataRequestMCType	<p>Used to create a StandaloneDataRequestMC.</p> <p>This component invokes the D1-StandaloneDataRequestMC Business Object using the ATD1StandaloneDataRequestMC Inbound Web Service.</p>
D1-StandaloneIntrvlComprMCType	<p>Used to create a StandaloneIntrvlComprMCType.</p> <p>This component invokes the D1-StandaloneIntrvlComprMCType Business Object using the ATD StandaloneIntrvlComprMCType Inbound Web Service.</p>
D1-StandaloneMcDataReqCommType	<p>Used to create a StandaloneMcDataReqCommType.</p> <p>This component invokes the D1-StandaloneMcDataReqCommType Business Object using the ATD1StandaloneMcDataReqCommType Inbound Web Service.</p>
D1-StandaloneMcDataRequest	<p>Used to create a StandaloneMcDataRequest.</p> <p>This component invokes the D1-StandaloneMcDataRequest Business Object using the ATD1StandaloneMcDataRequest Inbound Web Service.</p>

Component	Description
D1-UsageSubscriptionQuantity	<p>Used to create a UsageSubscriptionQuantity.</p> <p>This component invokes the D1-UsageSubscriptionQuantity Business Object using the ATD1UsageSubscriptionQuantity Inbound Web Service.</p>
D1-USQuantityType	<p>Used to create a USQuantityType.</p> <p>This component invokes the D1-USQuantityType Business Object using the ATD1USQuantityType Inbound Web Service.</p>
D2-CustomerQuantityCalculation	<p>Used to create a CustomerQuantityCalculation.</p> <p>This component invokes the D2-CustomerQuantityCalculation Business Object using the ATD2CustomerQuantityCalculation Inbound Web Service.</p>
D2-DynamicOptionIntervalEvent	<p>Used to create a DynamicOptionIntervalEvent.</p> <p>This component invokes the D2-DynamicOptionIntervalEvent Business Object using the ATD2DynamicOptionIntervalEvent Inbound Web Service.</p>
D2-DynamicOptionIntervalSet	<p>Used to create a DynamicOptionIntervalSet.</p> <p>This component invokes the D2-DynamicOptionIntervalSet Business Object using the ATD2DynamicOptionIntervalSet Inbound Web Service.</p>
D2-DynamicOptionIntervalSetType	<p>Used to create a DynamicOptionIntervalSetType.</p> <p>This component invokes the D2-DynamicOptionIntervalSetType Business Object using the ATD2DynamicOptionIntervalSetType Inbound Web Service.</p>
D2-ProfileServiceQuantity	<p>Used to create a ProfileServiceQuantity.</p> <p>This component invokes the D2-ProfileServiceQuantity Business Object using the ATD2ProfileServiceQuantity Inbound Web Service.</p>
D2-SendSettleTransactionIdComm	<p>Used to create a SendSettleTransactionIdComm.</p> <p>This component invokes the D2-SendSettleTransactionIdComm Business Object using the ATD2SendSettleTransactionIdComm Inbound Web Service.</p>



Component	Description
D2-SendSettleTransactionContractComm	<p>Used to create a SendSettleTransactionContractComm.</p> <p>This component invokes the D2-SendSettleTransactionContractComm Business Object using the ATD2SendSettleTransactionContractComm Inbound Web Service.</p>
D2-SendSettleTransactionIdCommType	<p>Used to create a SendSettleTransactionIdCommType.</p> <p>This component invokes the D2-SendSettleTransactionIdCommType Business Object using the ATD2SendSettleTransactionIdCommType Inbound Web Service.</p>
D2-SendSettleTransactionContractCommType	<p>Used to create a SendSettleTransactionContractCommType.</p> <p>This component invokes the D2-SendSettleTransactionContractCommType Business Object using the ATD2SendSettleTransactionContractCommType Inbound Web Service.</p>
D2-SettAccountServiceType	<p>Used to create a SettAccountServiceType.</p> <p>This component invokes the D2-SettAccountServiceType Business Object using the ATD2SettAccountServiceType Inbound Web Service.</p>
D2-SettlementAccountService	<p>Used to create a SettlementAccountService.</p> <p>This component invokes the D2-SettlementAccountService Business Object using the ATD2SettlementAccountService Inbound Web Service.</p>
D2-SettlementBilledUsage	<p>Used to create a SettlementBilledUsage.</p> <p>This component invokes the D2-SettlementBilledUsage Business Object using the ATD2SettlementBilledUsage Inbound Web Service.</p>
D2-SettlementItem	<p>Used to create a SettlementItem.</p> <p>This component invokes the D2-SettlementItem Business Object using the ATD2SettlementItem Inbound Web Service.</p>

Component	Description
D2-SettlementSubscription	<p>Used to create a SettlementSubscription.</p> <p>This component invokes the D2-SettlementSubscription Business Object using the ATD2SettlementSubscription Inbound Web Service.</p>
D2-UsageCalculationReqType	<p>Used to create a UsageCalculationReqType.</p> <p>This component invokes the D2-UsageCalculationReqType Business Object using the ATD2UsageCalculationReqType Inbound Web Service.</p>
D2-UsageCalculationRequest	<p>Used to create a UsageCalculationRequest.</p> <p>This component invokes the D2-UsageCalculationRequest Business Object using the ATD2UsageCalculationRequest Inbound Web Service.</p>
D2-UsageCalculationType	<p>Used to create a UsageCalculationType.</p> <p>This component invokes the D2-UsageCalculationType Business Object using the ATD2UsageCalculationType Inbound Web Service.</p>
D2-UsgSubsMarketParticipant	<p>Used to create a UsgSubsMarketParticipant.</p> <p>This component invokes the D2-UsgSubsMarketParticipant Business Object using the ATD2UsgSubsMarketParticipant Inbound Web Service.</p>

# Appendix A

---

## Inbound Web Services

The Oracle Utilities Customer Cloud Service components are developed using Web services method, and these components require Inbound Web Services to be defined in the application.

This chapter includes the following:

- [Pre-requisites](#)
- [List of Inbound Web Services](#)

## Pre-requisites

Before running the automation on Oracle Utilities Customer Cloud Service, run X1-ImportBundles-Flow1 and X1-ImportBundles-Flow2 in the Oracle Utilities Application Framework environment. This imports all the necessary Inbound Web Services required to automate flows in Oracle Utilities Customer Cloud Service environment.

## List of Inbound Web Services

The Inbound Web Services provided to use with the delivered components and flows are:

- ATC1Account
- ATC1AccountBS
- ATC1AccountLetterExtract
- ATC1AcctBalLetterExtract
- ATC1ActivityInformation
- ATC1AdjLetterExtract
- ATC1Adjustment
- ATC1AutoPayLetterExtract
- ATC1Bill
- ATC1BillableCharge
- ATC1BillLetterExtract
- ATC1BillSegment
- ATC1CollectionAgencyReferral
- ATC1CollectionProcess
- ATC1CollLetterExtract
- ATC1ContractOptEvent
- ATC1ContractOption
- ATC1CtrlCenSearchByAccountId
- ATC1CtrlCenSearchByAddress
- ATC1CtrlCenSearchByNameAddress
- ATC1CustConLetterExtract
- ATC1CutProcess
- ATC1DepositControl
- ATC1DeviceInformation
- ATC1EndOfLetterExtract
- ATC1FACompletionMessage
- ATC1FASyncRequestRead

- ATC1FT
- ATC1GetSyncRequestId
- ATC1GetUsageId
- ATC1IdentifierType
- ATC1LetterTemplate
- ATC1MailInfoLetterExtract
- ATC1MatchEvent
- ATC1MDM2ContractOptSyncReqRead
- ATC1MDM2ContrOptEvtSyncReqRead
- ATC1MDM2PersonSyncRequestRead
- ATC1MDM2SARelSyncRequestRead
- ATC1MDM2SASyncRequestRead
- ATC1MultiCancelRebill
- ATC1OffCycleBillGenerator
- ATC1OverdueProcess
- ATC1PayArrangeByBill
- ATC1PayArrangement
- ATC1Payment
- ATC1PaymentEvent
- ATC1PaymentEventQuickAdd
- ATC1PaymentLetterExtract
- ATC1PaymentQuickAdd
- ATC1PayPlan
- ATC1PayTndrLetterExtract
- ATC1Person
- ATC1PersonBS
- ATC1PersonLetterExtract
- ATC1PremFAGTT
- ATC1PremiseLetterExtract
- ATC1PremiseType
- ATC1RateEngineConfig
- ATC1SARelationship
- ATC1ServiceAgreement
- ATC1ServiceAgreementUpdate
- ATC1ServiceRequestUpdate
- ATC1SeveranceProcess

- ATC1SevLetterExtract
- ATC1StartStop
- ATC1StartStopBS
- ATC1Statement
- ATC1SummaryLetterExtract
- ATC1TenderControl
- ATC1TenderCtrlSearchByAllUser
- ATC1UsageReqCyclicalBilling
- ATC1UsageRequestNonCyclical
- ATC1WriteOff
- ATC1WriteOffLetterExtract
- ATC1WriteOffProcess
- ATCMSyncCfgBO
- ATC1MktSATypeSARelationshipType
- ATC1SATypeSARelationshipType
- ATC1UserMiscRead
- ATC1ExternalRepoPlusSASPSync
- ATC1ExternalRepoPlusMailAddSync
- ATD1Business
- ATD1ContactType
- ATD1CreateFAIMDRead
- ATD1CutServiceForNonPayment
- ATD1DeviceCommissionRead
- ATD1DeviceConfiguration
- ATD1DeviceConfigurationType
- ATD1DisableService
- ATD1DisableServiceType
- ATD1DvcEventCategoryLookup
- ATD1EnableService
- ATD1EnableServiceType
- ATD1EstimationIMDInterval
- ATD1EstimationIMDScalar
- ATD1ExternalApplication
- ATD1FieldActivity
- ATD1FieldActivityType
- ATD1GetUsageFromExtID

- ATD1HeadEndSystem
- ATD1HowToCreateActivityOBComm
- ATD1HowToCreateMCInformation
- ATD1HowToProcessDeviceInfo
- ATD1IMDSeeder
- ATD1InitialLoadIMDInterval
- ATD1InitialLoadIMDScalar
- ATD1InitialLoadIMDSubtrInterval
- ATD1InstallDeviceRead
- ATD1InstallEventSyncRequestRead
- ATD1IntervalChannel
- ATD1Item
- ATD1ItemInstallEvent
- ATD1ItemType
- ATD1ManualIMDInterval
- ATD1ManualIMDScalar
- ATD1ManualIMDSubtrInterval
- ATD1ManualMeter
- ATD1ManualMeterInstallEvent
- ATD1Manufacturer
- ATD1MarketParticipant
- ATD1OnDemandReadInterval
- ATD1OnDemandReadIntervalType
- ATD1OnDemandReadScalar
- ATD1OnDemandReadScalarType
- ATD1OngoingSyncRequestContactRead
- ATD1OngoingSyncRequestDeviceRead
- ATD1Person
- ATD1Register
- ATD1RegisterType
- ATD1RequestToDoRead
- ATD1SeederSyncMasterConfig
- ATD1ServicePoint
- ATD1ServicePointCharacteristics
- ATD1ServicePointType
- ATD1ServiceType

- ATD1SGGPayloadProcessing
- ATD1SmartMeter
- ATD1SmartMeterInstallEvent
- ATD1SmartMeterType
- ATD1StdEventNameLookup
- ATD1UnitOfMeasure
- ATD1UpdateDeviceRead
- ATD1UpdateSPRead
- ATD1VEEGroup
- ATD2DynamicOption
- ATD2DynamicOptionEvent
- ATD2OngoingSyncRequestDynOptEvtRead
- ATD2OngoingSyncRequestDynOptRead
- ATD2OngoingSyncRequestUSRead
- ATD2OngoingSyncReqUSMktPartRead
- ATD2UsageSubscription
- ATD2UsageTransaction
- ATD2UsgSubsMarketParticipant
- ATD8DeviceEventMappingLookup
- ATD8HeadendUOMLookup
- ATD8ReadOnDemandReadResultType
- ATD8ReadResultType
- ATD8ReadScalarType
- ATD8StatusChangedType
- ATD8VersionMasterConfig
- ATW1AACCCfgDeviceUpgrade
- ATW1AACfgDeviceUpgrade
- ATW1ACACCCfgDeviceUpgrade
- ATW1ACACfgDeviceUpgrade
- ATW1ActivityCompletionEventType
- ATW1ActivityComplInboundComm
- ATW1ActivityNotes
- ATW1AdHocActCoreNoLocation
- ATW1AdHocActivityCore
- ATW1AssetCompCfgRpt
- ATW1AssetCompCfgWO



- ATW1AssetCompConfig
- ATW1AssetCompletionEventType
- ATW1AssetCompToAssetCfgWO
- ATW1AssetCompToAssetCompCfgRpt
- ATW1AssetCompToAssetCompCfgWO
- ATW1AssetCompToAssetCompConfig
- ATW1AssetCriteriaActGenerator
- ATW1AssetDposCmpEvtType
- ATW1AssetListActGenerator
- ATW1AssetLocation
- ATW1AssetLocationType
- ATW1AssetReplicationActivity
- ATW1AssetReplicationComplEvent
- ATW1AssetToAssetCfgWO
- ATW1AssetToAssetCompCfgRpt
- ATW1AssetToAssetCompCfgWO
- ATW1AssetToAssetConfig
- ATW1AssetType
- ATW1BasicActivityType
- ATW1BasicTest
- ATW1BasicWorkOrder
- ATW1Business
- ATW1CompnAssetListActGenerator
- ATW1CompnCriteriaActGenerator
- ATW1ComponentType
- ATW1ConfigType
- ATW1ContactType
- ATW1CrAnyServiceHistoryCmplEvt
- ATW1CreActivityPayCmpEvt
- ATW1CreAssetAttachCmpEvt
- ATW1CreAssetCmpEvt
- ATW1CreAssetPayCmpEvt
- ATW1CreateMobileWOInboundComm
- ATW1CreNodeAttachCmpEvt
- ATW1CreServiceHistoryAttCmpEvt
- ATW1CreServiceHistoryPayCmpEvt

- ATW1CreSvcHistCmpEvt
- ATW1DataAreaCmpEvtType
- ATW1FollowUpSkippedAssetsCmpEvt
- ATW1GeneralCommunicationType
- ATW1GeneralCompletionEventType
- ATW1LocalActivityCore
- ATW1Manufacturer
- ATW1MDMAssetSyncRequestRead
- ATW1MobileUpdWorkedAssetCmpEvt
- ATW1NodeCriteriaActGenerator
- ATW1OngoingSyncRequestAssetNodeRead
- ATW1Organization
- ATW1OrganizationType
- ATW1OutboundActivityCore
- ATW1OutboundActivityType
- ATW1Person
- ATW1ReplaceAssetLocal
- ATW1ReplaceAssetOutbound
- ATW1ReplicationComplEventType
- ATW1ScheduledActivityType
- ATW1ServiceHistory
- ATW1ServiceHistoryType
- ATW1ServiceHistTypeCmpEvtType
- ATW1SingleAssetCfgRpt
- ATW1SingleAssetCfgWO
- ATW1SingleAssetConfig
- ATW1SOMActivity
- ATW1SOMActiviType
- ATW1StorageLocation
- ATW1StorageLocationType
- ATW1SvcHistFromActvCmplEvtType
- ATW1TrnAssetCmpEvent
- ATW1UpdAssetPayCmpEvt
- ATW1UpdNodePayCmpEvt
- ATW1WorkOrderNotes
- ATW2AACCfgFirmwareUpgrade

- ATW2AACfgFirmwareUpgrade
- ATW2ACACCfgFirmwareUpgrade
- ATW2ACACfgFirmwareUpgrade
- ATW2ACCfgFirmwareUpgrade
- ATW2ACfgFirmwareUpgrade
- ATW2CommunicationComponent
- ATW2CommunicationComponentSpec
- ATW2CommunicationRelay
- ATW2CommunicationRelaySpec
- ATW2FirmwareCommandLocal
- ATW2FirmwareCommandOutbound
- ATW2FirmwareSpecification
- ATW2FirmwareVersion
- ATW2ManualMeter
- ATW2ManualMeterSpecification
- ATW2ServicePoint
- ATW2SmartMeter
- ATW2SmartMeterSpecification
- ATW2SmartTest
- ATW2Vehicle
- ATX1AssetLocationType
- ATX1C2MMasterConfiguration
- ATX1C2MSATypeMapping
- ATX1CCBMDM-MDMCCB-Lookup
- ATX1DServicePointType
- ATX1GetSyncRequestInId
- ATX1ODMMDM-MDMODM-Lookup
- ATX1RetrieveAlerts
- ATX1RetrieveGlobalContexts
- ATX1ServicePoint
- ATX1ServicePointType
- ATX1ServiceType
- ATX1UnitOfMeasure
- ATC1AutoPayTask
- ATC1AutoPayTaskType
- ATC1OneTimePaymentTask

- ATC1OneTimePaymentTaskType
- ACT1RecommendBudget
- ATC1PayEventPhysicalBO
- D1-DataSourceMeasurements
- D1-DataSourceMeasurementDirect

# Appendix B

---

## Identifying Fields For a Web Service Request

The requisite fields need to be filled up with data in order to map the value on a given schema. For example: When a person is added online, only the field description is shown, but the exact field mapping is hidden from the user.

Following are the methods you can use to identify fields for a web service request and add data in those fields:


- [Debug Mode in the Application](#)
- [IE Development Tool Bar](#)
- [SOAP UI](#)

## Debug Mode in the Application

The debug mode enables users to check the field mapping on a given maintenance page. This is actually the easiest among the different possible ways; however some clients may have system restriction (such as access restriction) on using debug mode.

To enter test data in the requisite fields using the debug method:

1. Login to the Oracle Utilities Customer Cloud Service application in the 'debug' mode.
2. Before clicking the Debug mode switch ensure to navigate first to the target page. Example: Person maintenance page

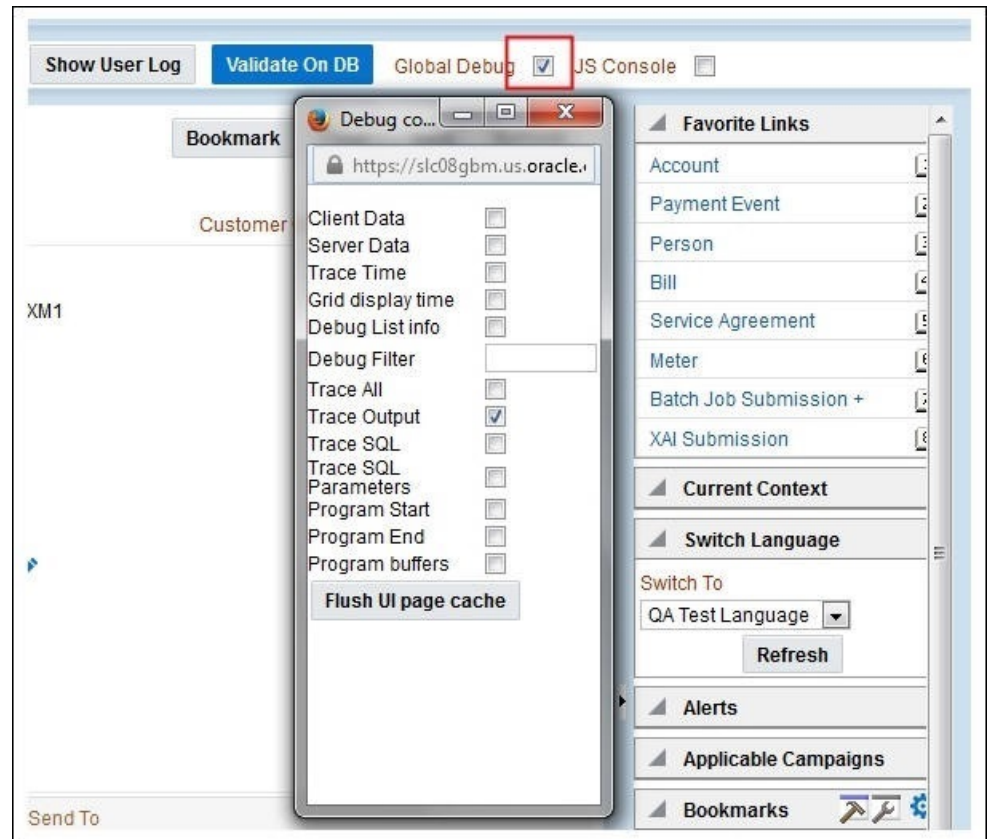

3. Perform the required action. Click **Save**.

Example: The figure below shows adding a person (person name, person phone, person contacts, Person IDs, etc)

The screenshot displays the 'Person' form in the Oracle Utilities Customer Cloud Service application. The form is organized into several sections:

- Person Information:** Includes fields for 'Person/Business' (set to 'Person'), 'Life Support / Sensitive Load', and 'Person ID'.
- Person Names:** A table with columns for 'Name Type' and 'Person Name'. One entry is visible: 'Primary' with the name 'Sanity, 48173'.
- Person Phones:** A table with columns for 'Phone Type', 'Phone Number', 'Extension', and 'Phone Format'. No entries are currently listed.
- Person Contacts:** A table with columns for 'Contact Routing', 'Person Contact Type', 'Contact Information', 'Extension', 'Format', 'Primary', and 'Do Not'. No entries are currently listed.
- Person IDs:** A table with columns for 'Primary ID', 'ID Type', 'ID Number', and 'Identifier Format'. One entry is visible: 'Primary ID' is checked, 'ID Type' is 'Social security number', 'ID Number' is '523-65-5514', and 'Identifier Format' is '999-99-9999'.

The schema window showing the populated values is displayed.

```

https://slc08gbm.us.oracle.com:10701/ouaf/cisMain.jsp?language=ENG
<field name="IN_CITY_LIM_LBL">In City Limit</field>
<field name="GEO_CODE_LBL">Geographic Code</field>
<list name="PER_IDENTIFIER">
  <listHeader>
    <field name="PER_ID"></field>
    <field name="LAST_ID_TYPE_CD"></field>
    <field name="moreRows">false</field>
    <field name="remainingRows">0</field>
    <field name="lastInfo"></field>
  </listHeader>
  <listBody action="A">
    <field name="PER_ID"></field>
    <field name="ID_TYPE_CD">SSN</field>
    <field name="PER_ID_NBR">523-65-5514</field>
    <field name="PRIM_SW">>true</field>
    <field name="VERSION">0</field>
    <field name="ENCR_PER_ID_NBR"></field>
    <field name="HASH_PER_ID_NBR"></field>
    <field name="IDENTIFIER_FMT">999-99-9999</field>
  </listBody>
</list>
<list name="PER_NAME">
  <listHeader>
    <field name="PER_ID"></field>
    <field name="LAST_SEQ_NUM">0</field>
    <field name="moreRows">false</field>
    <field name="remainingRows">0</field>
    <field name="lastInfo"></field>
  </listHeader>
  <listBody action="A">
    <field name="ENTITY_NAME_UPR"></field>
    <field name="PER_ID"></field>
    <field name="SEQ_NUM">0</field>
    <field name="ENTITY_NAME">Sanity, 48173</field>
    <field name="NAME_TYPE_FLG">PRIM</field>
    <field name="VERSION">0</field>
    <field name="PRIM_NAME_SW">false</field>
  </listBody>
</list>
<list name="PER_CHAR">
  <listHeader>
    <field name="PER_ID"></field>
    <field name="LAST_CHAR_TYPE_CD"></field>
    <field name="LAST_EFFDT"></field>
    <field name="moreRows">false</field>
    <field name="remainingRows">0</field>
    <field name="lastInfo"></field>
  </listHeader>
  <listBody action="A">

```

- Navigate to the Business Object or Business Service look up window for the requisite field.

Example: In the figure below, ENTITY\_NAME is named as entityName.

```

<effectiveDate dataType="date" mapField="EFFDT"/>
<adhocCharacteristicValue mapField="ADHOC_CHAR_VAL"/>
<version dataType="number" mapField="VERSION"/>
<characteristicValueForeignKey1 mapField="CHAR_VAL_FK1"/>
<characteristicValueFK2 mapField="CHAR_VAL_FK2"/>
<characteristicValueFK3 mapField="CHAR_VAL_FK3"/>
<characteristicValueFK4 mapField="CHAR_VAL_FK4"/>
<characteristicValueFK5 mapField="CHAR_VAL_FK5"/>
<searchCharacteristicValue mapField="SRCH_CHAR_VAL"/>
</personCharacteristic>
<personId2 type="list" mapChild="CI_PER_ID">
  <personId mapField="PER_ID"/>
  <idType mapField="ID_TYPE_CD"/>
  <personIdNumber mapField="PER_ID_NBR"/>
  <isPrimaryId dataType="boolean" mapField="PRIM_SW"/>
  <version dataType="number" mapField="VERSION"/>
  <encryptedIdNumber mapField="ENCR_PER_ID_NBR"/>
  <hashIdNumber mapField="HASH_PER_ID_NBR"/>
</personId2>
<personName type="list" mapChild="CI_PER_NAME">
  <uppercaseEntityName mapField="ENTITY_NAME_UPR"/>
  <personId mapField="PER_ID"/>
  <sequence dataType="number" mapField="SEQ_NUM"/>
  <entityName mapField="ENTITY_NAME"/>
  <nameType dataType="lookup" mapField="NAME_TYPE_FLG" lookup="NAME_TYPE_FLG"/>
  <version dataType="number" mapField="VERSION"/>
  <isPrimaryName dataType="boolean" mapField="PRIM_NAME_SW"/>
</personName>
<personPerson type="list" mapChild="CI_PER_PER">
  <personId1 mapField="PER_ID1"/>
  <personId2 mapField="PER_ID2"/>
  <personRelationshipType mapField="PER_REL_TYPE_CD"/>
  <startDate dataType="date" mapField="START_DT"/>
  <endDate dataType="date" mapField="END_DT"/>
  <boolean mapField="FINAN_REL_SW"/>

```

- In the flow, search for the requisite field and enter the component test data.

WS-SETXMLLISTELEMENT			uppercaseEntityName	<input type="text"/>
WS-SETXMLLISTELEMENT			personId	<input type="text"/>
WS-SETXMLLISTELEMENT			sequence	<input type="text"/>
WS-SETXMLLISTELEMENT			entityName	<input type="text" value="Sanity,UserTesting3"/>
WS-SETXMLLISTELEMENT			nameType	<input type="text" value="PRIM"/>
WS-SETXMLLISTELEMENT			version	<input type="text"/>
WS-SETXMLLISTELEMENT			isPrimaryName	<input type="text"/>

- Click **Save** to save the test data.




# IE Development Tool Bar

The IE Development tool bar, available in IE11, enables users to inspect the page and its field mapping. It is on a 1:1 basis, meaning one inspect = one field.


To enter test data in the requisite fields using the IE Development tool bar, follow these steps:

1. Login to Oracle Utilities Customer Cloud Service using Internet Explorer 11.
2. Navigate to the page where the requisite field needs to be updated with data.


Example: The figure below shows the **Account** page where the **Characteristic Value** field on the **Characteristics** tab needs to be updated.

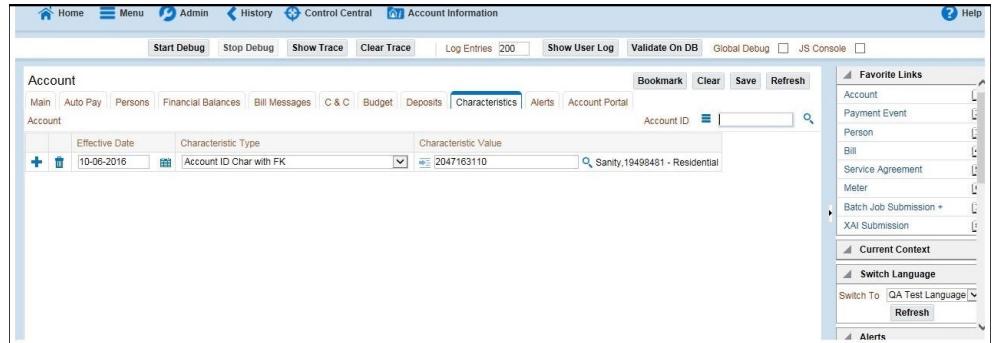

3. Press **F12**. The browser displays the F12 developer tools that help in building and debugging web pages.

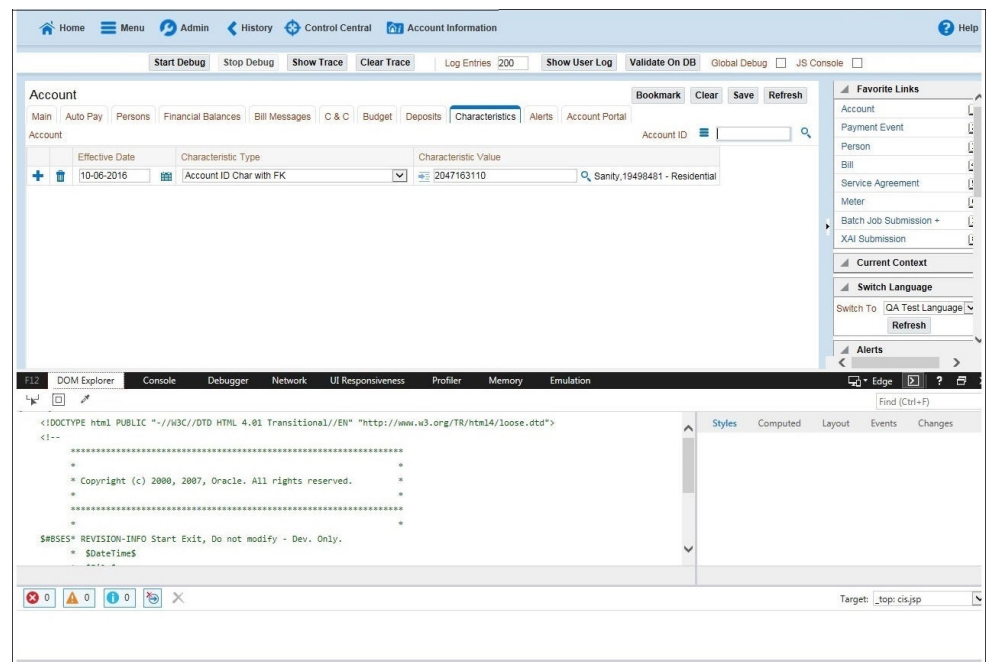


- On the F12 tools menu, select the **DOM Explorer** tab and click the **Select element** icon.

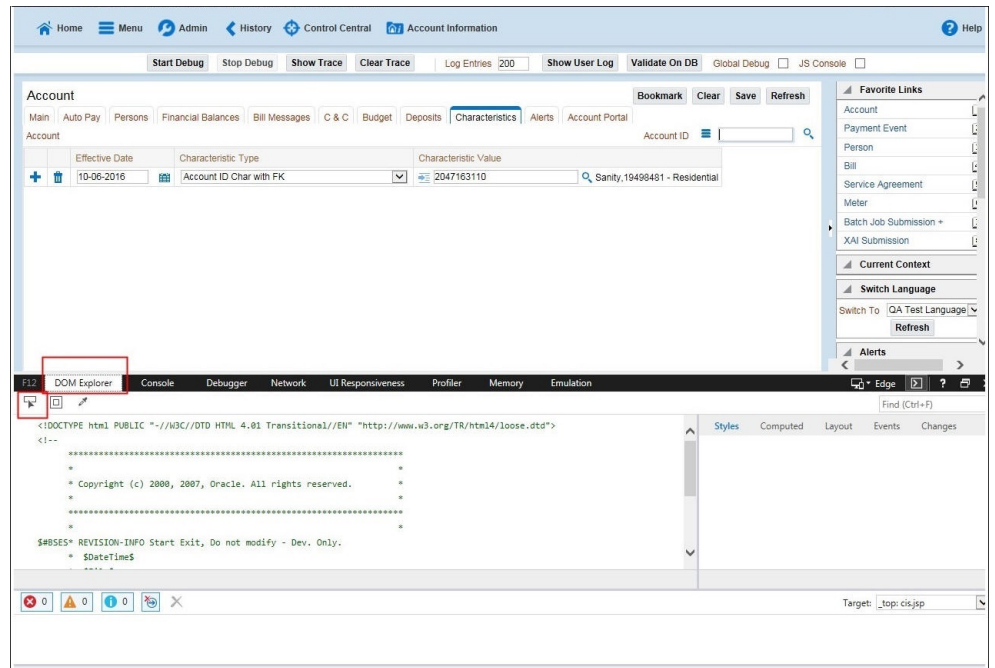

- On the application page, click the field for which you need to enter the data. The DOM Explorer shows the HTML for the selected field.

Example: Click the **Characteristic Value** field on the **Account** page. The DOM Explorer shows the **ID** of that field.

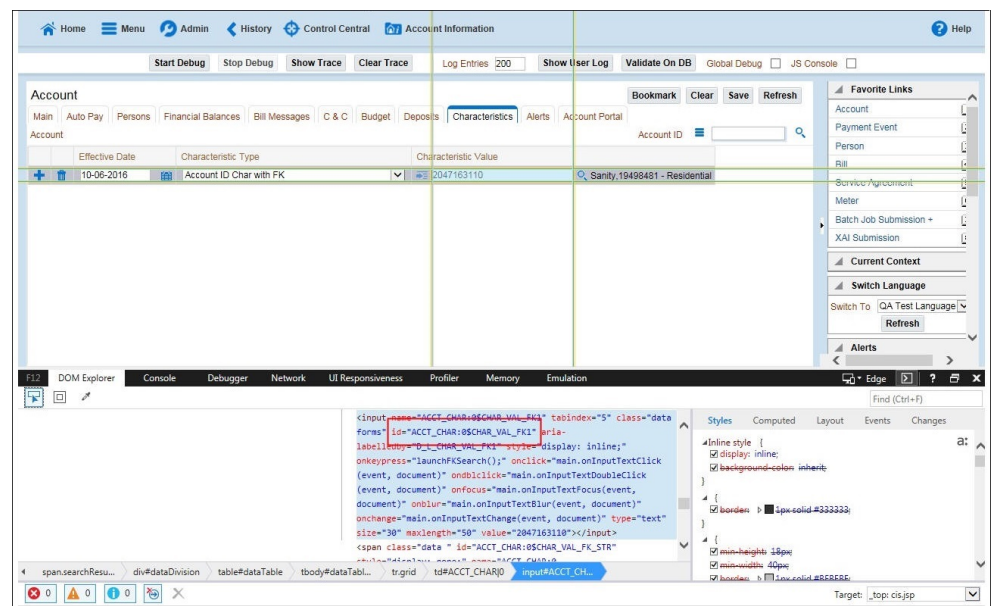

- On the object lookup window, search the requisite field.

Example: Search for CHAR\_VAL\_FK1.

```

<version dataType="number" mapField="VERSION"/>
</accountAlert>
<accountAutopay type="list" mapChild="CL_ACCT_APAY">
  <accountAutoPayId mapField="ACCT_APAY_ID"/>
  <accountId mapField="ACCT_ID"/>
  <startDate dataType="date" mapField="START_DT"/>
  <endDate dataType="date" mapField="END_DT"/>
  <autopaySource mapField="APAY_SRC_CD"/>
  <externalAccountId mapField="EXT_ACCT_ID"/>
  <expireDate dataType="date" mapField="EXPIRE_DT"/>
  <entityName mapField="ENTITY_NAME"/>
  <comments mapField="COMMENTS"/>
  <version dataType="number" mapField="VERSION"/>
  <autopayMaxWithdrawalAmount dataType="money" mapField="APAY_MAX_WDRWL_AMT"/>
  <autoPayMethod dataType="lookup" mapField="APAY_METHOD_FLG" lookup="APAY_METHOD_FLG"/>
  <encryptedExternalAccountId mapField="ENCR_EXT_ACCT_ID"/>
</accountAutopay>
<accountCharacteristic type="list" mapChild="CL_ACCT_CHAR">
  <accountId mapField="ACCT_ID"/>
  <characteristicType mapField="CHAR_TYPE_CD"/>
  <effectiveDate dataType="date" mapField="EFFDT"/>
  <characteristicValue mapField="CHAR_VAL"/>
  <adhocCharacteristicValue mapField="ADHOC_CHAR_VAL"/>
  <version dataType="number" mapField="VERSION"/>
  <characteristicValueForeignKey1 mapField="CHAR_VAL_FK1"/>
  <characteristicValueFK2 mapField="CHAR_VAL_FK2"/>
  <characteristicValueFK3 mapField="CHAR_VAL_FK3"/>
  <characteristicValueFK4 mapField="CHAR_VAL_FK4"/>
  <characteristicValueFK5 mapField="CHAR_VAL_FK5"/>
  <searchCharacteristicValue mapField="SRCH_CHAR_VAL"/>
</accountCharacteristic>
<accountMessage type="list" mapChild="CL_ACCT_MSG">
  <accountId mapField="ACCT_ID"/>

```

7. In the flow, add the necessary data into the field.

WS-SETXMLLISTELEMENT				characteristicValue	<input type="text" value="2047163110"/>
WS-SETXMLLISTELEMENT				adhocCharacteristic...	<input type="text"/>
WS-SETXMLLISTELEMENT				version	<input type="text"/>
WS-SETXMLLISTELEMENT				characteristicValueF...	<input type="text"/>
WS-SETXMLLISTELEMENT				characteristicValueFK2	<input type="text"/>
WS-SETXMLLISTELEMENT				characteristicValueFK3	<input type="text"/>
WS-SETXMLLISTELEMENT				characteristicValueFk4	<input type="text"/>
WS-SETXMLLISTELEMENT				characteristicValueFK5	<input type="text"/>

8. Click **Save** to save the data.

# SOAP UI

This method is an alternative to the other methods mentioned above if the user is familiar with SOAP UI.

To identify the requisite fields using SOAP UI:


1. Login to the Oracle Utilities Customer Cloud Service application.
2. Navigate to the page where the test data has to added. Add the data in the respective fields.

Example: The figure below shows the **Case** page where **Characteristics Type** and **Characteristic Value** are added in the **Characteristics** section.

The screenshot displays the Oracle Utilities Customer Cloud Service interface for a Case. The top navigation bar includes Home, Menu, Admin, History, Control Central, and Account Information. Below the navigation bar are buttons for Start Debug, Stop Debug, Show Trace, Clear Trace, Log Entries (200), Show User Log, Validate On DB, Global Debug, and JS Co. The main content area is titled 'Case' and includes a Case ID of 433185030. The Case Info section shows 'Open - STATUS A. TEST CASE INFO. 2347 Days Old. Madera, Mark, Created: 05-04-2010 06:30PM'. The Case Type is CASEINFO and the Status is STATUS A. The Date/Time Opened is 05-04-2010 06:30PM. The Actions section shows STATUS B. The Comment field contains 'sample test'. The Person field is 7182282498 (Smith, Dan), the Account is 0129423474 (Smith, Dan - Residential), the Premise is 7974676471 (1 Dan Street, San Francisco, CA, 43212, USA, Apartment, 7974676471), and the Responsible User is SPLMXM1 (Madera, Mark). The Contact Information section shows Contact Person 7182282498 (Smith, Dan). The Characteristics section contains the following table:

	Characteristic Type	Characteristic Value
+ [trash]	Short comment	TEST CHARTYPE INFO
+ [trash]	Bill Amount	100
+ [trash]	Callback Date / Time	01-01-2008-00:01:00

- On the SOAP UI, perform a Read using the data that has been added on the **Case** page (in step 2). The result is displayed in the right pane.

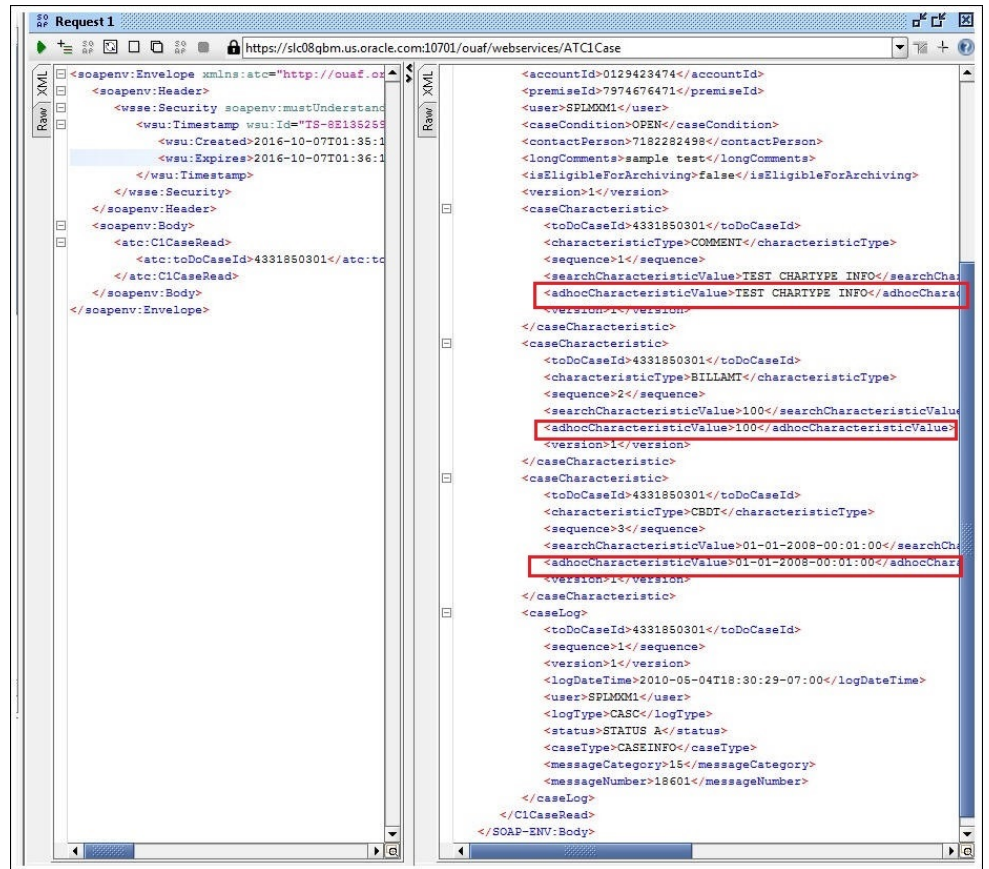

- Copy the values and paste them in the respective fields on the flow. Example: COMMENT and TEST CHARTYPE INFO are the values for characteristicType and adhocCharacteristicValue fields.

**Note:** Not all fields populated on the SOAP response needs to be populated on the flow. (Example: version, info, other type of description, etc).

WS-SETXMLLISTELEMENT		Add	caseCharacteristic	
WS-SETXMLLISTELEMENT			toDoCaseId	<input type="text"/>
WS-SETXMLLISTELEMENT			characteristicType	<input type="text" value="COMMENT"/>
WS-SETXMLLISTELEMENT			sequence	<input type="text" value="1"/>
WS-SETXMLLISTELEMENT			searchCharacteristicValue	<input type="text"/>
WS-SETXMLLISTELEMENT			characteristicValueF5	<input type="text"/>
WS-SETXMLLISTELEMENT			characteristicValueF4	<input type="text"/>
WS-SETXMLLISTELEMENT			characteristicValueF3	<input type="text"/>
WS-SETXMLLISTELEMENT			characteristicValueF2	<input type="text"/>
WS-SETXMLLISTELEMENT			characteristicValueFore...	<input type="text"/>
WS-SETXMLLISTELEMENT			adhocCharacteristicValue	<input type="text" value="TEST CHARTYPE INFO"/>
WS-SETXMLLISTELEMENT			characteristicValue	<input type="text"/>
WS-SETXMLLISTELEMENT			version	<input type="text"/>

- Click **Save** to save the data.