Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Work and Asset Cloud Service Release 24A F93151-01

April 2024



Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Work and Asset Cloud Service

Copyright © 2000, 2024 Oracle and/or its affiliates.

Contents

Preface	i
Audience	ii
Related Documents	ii
Updates to the Documentation	ii
Documentation Accessibility	ii
Conventions	
Abbreviations	iii
Chapter 1	
Component Reference	1-1
Overview	1-2
Oracle Utilities Work and Asset Management Components	1-2
Oracle Utilities Operational Device Management Components	1-98
Appendix A	
Inbound Web Services	A-1
Pre-requisites	
List of Inbound Web Services	A-2
Appendix B	
Identifying Fields For a Web Service Request	B- 1
Debug Mode in the Application	
IE Development Tool Bar	
SOAP UI	

Preface

Welcome to the Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Work and Asset Cloud Service for release 24A.

This guide describes the Oracle Utilities Work and Asset Management and Oracle Utilities Operational Device Management components and the function libraries used to create those components in Oracle Utilities Testing Accelerator 24A.

The preface includes the following sections:

- Audience
- Related Documents
- Updates to the Documentation
- Documentation Accessibility
- Conventions
- Abbreviations

Audience

This guide is intended for QA/Test Engineers and Automation Developers to understand the various components and libraries available for them to automate the business test flows for Oracle Utilities Work and Asset Management/Oracle Utilities Operational Device Management using Oracle Utilities Testing Accelerator for Oracle Utilities Work and Asset Management/Oracle Utilities Operational Device Management.

Related Documents

For more information, refer to the following Oracle resources.

- Oracle Utilities Testing Accelerator User's Guide for Cloud
- Oracle Utilities Testing Accelerator Reference Guide for Core
- Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Cloud Service
- Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Billing Cloud Service
- Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Rate Cloud Service
- Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Care and Billing Cloud Service
- Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Meter Solution Cloud Service
- Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Work and Asset Cloud Service

See also:

- Oracle Utilities Work and Asset Management Documentation Library
- Oracle Utilities Operational Device Management Documentation Library

Updates to the Documentation

Documentation updates are posted on the Oracle Help Center page as they become available.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle's Accessibility Program website.

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. If you are hearing impaired, visit the Oracle Accessibility Learning and Support website for more information.

Conventions

Convention	Meaning	
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.	
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.	
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.	

The following text conventions are used in this document:

Abbreviations

The following terms are used in this document:

Term	Definition
OUWAM/WAM	Oracle Utilities Work and Asset Management
OUTA/UTA	Oracle Utilities Testing Accelerator
OUWACS/WACS	Oracle Utilities Work and Asset Cloud Service

Chapter 1

Component Reference

This chapter lists the Oracle Utilities Work and Asset Management/Oracle Utilities Operational Device Management starter components available to create flows in Oracle Utilities Testing Accelerator for testing the Oracle Utilities Work and Asset Management/Oracle Utilities Operational Device Management applications.

The chapter includes the following sections:

- Overview
- Oracle Utilities Work and Asset Management Components
- Oracle Utilities Operational Device Management Components

Overview

Oracle Utilities Testing Accelerator for Oracle Utilities Work and Asset Management/ Oracle Utilities Operational Device Management is a test starter pack built on top of Oracle Utilities Testing Accelerator that generates test automation scripts using Oracle Utilities Testing Accelerator Workbench.

Oracle Utilities Testing Accelerator for Oracle Utilities Work and Asset Management/ Oracle Utilities Operational Device Management contains out-of-the-box productspecific components used to build new test flows in Oracle Utilities Testing Accelerator Workbench to test the Oracle Utilities Work and Asset Management/Oracle Utilities Operational Device Management applications. These components correspond to specific business entities, such as business objects, service scripts, or business services used for interfacing with the application. Users can use these components as available or can extend them. Users can also create new components to be used to create flows. This starter pack also contains a set of function libraries that can be used for creating custom components.

For more information about creating components and flows see *Oracle Utilities Testing Accelerator User's Guide for Cloud* included in this release. The documentation is available in Oracle Help Center at:

https://docs.oracle.com/en/industries/energy-water/testing-accelerator-cloud/ index.html

Oracle Utilities Work and Asset Management Components

This section lists the starter components available in Oracle Utilities Work and Asset Management.

Prerequisites: The Inbound Web Service using the respective business object should be available in the application.

Additional Notes: Failure while creating, reading, or updating the component is logged to the test execution report, facilitating debugging/analysis of the problem.

The components are categorized under the following functional areas:

- Administration Data
- Asset Management
- General
- Inventory Management
- Purchasing
- Work Management
- Resource Management
- Invoicing
- Integration
- Construction Work Management

Component	Description
W1-AccountingCalendar	Used to create, update, read, or delete AccountingCalendar in the WAM application.
	This component calls the W1-AccountingCalendar business object using the Inbound Web Service.
W1-StatusReason	Used to create, update, read, or delete StatusReason in the WAM application.
	This component calls the W1-StatusReason business object using the Inbound Web Service.
W1-PERMITCLS	Used to create, update, read, or delete PERMITCLS in the WAM application.
	This component calls the W1-PERMITCLS business object using the Inbound Web Service.
W1-NormalizationDeficiency	Used to create, update, read, or delete NormalizationDeficiency in the WAM application.
	This component calls the W1- NormalizationDeficiency business object using the Inbound Web Service.
W1-MDMIntegrationMasterConfig	Used to create, update, read, or delete MDMIntegrationMasterConfig in the WAM application.
	This component calls the W1- MDMIntegrationMasterConfig business object using the Inbound Web Service.
F1-EsriMapMasterConfig	Used to create, update, read, or delete EsriMapMasterConfig in the WAM application.
	This component calls the F1-EsriMapMasterConfig business object using the Inbound Web Service.
F1-EsriWebMap	Used to create, update, read, or delete EsriWebMap in the WAM application.
	This component calls the F1-EsriWebMap business object using the Inbound Web Service.
W1-CCBIntegrationMasterConfig	Used to create, update, read, or delete CCBIntegrationMasterConfig in the WAM application.
	This component calls the W1- CCBIntegrationMasterConfig business object using the Inbound Web Service.

Administration Data

Component	Description
W1-ConfigClass	Used to create, update, read, or delete ConfigClass in the WAM application.
	This component calls the W1-ConfigClass business object using the Inbound Web Service.
W1-DSIIdentifierMap	Used to create, update, read, or delete DSIIdentifierMap in the WAM application.
	This component calls the W1-DSIIdentifierMap business object using the Inbound Web Service.
W1-ErasureScheduleContact	Used to create, update, read, or delete ErasureScheduleContact in the WAM application.
	This component calls the W1- ErasureScheduleContact business object using the Inbound Web Service.
W1-EsriWAMIntegMasterConfig	Used to create, update, read, or delete EsriWAMIntegMasterConfig in the WAM application.
	This component calls the W1- EsriWAMIntegMasterConfig business object using the Inbound Web Service.
W1-ExternalPermitTemplate	Used to create, update, read, or delete ExternalPermitTemplate in the WAM application.
	This component calls the W1- ExternalPermitTemplate business object using the Inbound Web Service.
W1- FailureDowntimeSHTCmpEvtTyp	Used to create, update, read, or delete FailureDowntimeSHTCmpEvtTyp in the WAM application.
	This component calls the W1- FailureDowntimeSHTCmpEvtTyp business object using the Inbound Web Service.
W1-FailureProfFailureRepair	Used to create, update, read, or delete FailureProfFailureRepair in the WAM application.
	This component calls the W1- FailureProfFailureRepair business object using the Inbound Web Service.
W1-GISProjectedCoordinateSys	Used to create, update, read, or delete GISProjectedCoordinateSys in the WAM application.
	This component calls the W1- GISProjectedCoordinateSys business object using the Inbound Web Service.

Component	Description
W1-GISToWAMSyncMapping	Used to create, update, read, or delete GISToWAMSyncMapping in the WAM application
	This component calls the W1- GISToWAMSyncMapping business object using the Inbound Web Service.
W1-GaugeRdWtThresholdMsrType	Used to create, update, read, or delete GaugeRdWtThresholdMsrType in the WAM application.
	This component calls the W1-GaugeRdWtThresholdMsrType business objec using the Inbound Web Service.
W1-GaugeReadRange	Used to create, update, read, or delete GaugeReadRange in the WAM application.
	This component calls the W1-GaugeReadRange business object using the Inbound Web Service.
W1-HomepageMasterConfig	Used to create, update, read, or delete HomepageMasterConfig in the WAM application.
	This component calls the W1- HomepageMasterConfig business object using the Inbound Web Service.
W1-InspectionTypeGenrlWeighted	Used to create, update, read, or delete InspectionTypeGenrlWeighted in the WAM application.
	This component calls the W1-InspectionTypeGenrlWeighted business object using the Inbound Web Service.
W1-InternalPermitTemplate	Used to create, update, read, or delete InternalPermitTemplate in the WAM application.
	This component calls the W1- InternalPermitTemplate business object using the Inbound Web Service.
W1-InventoryLocationType	Used to create, update, read, or delete InventoryLocationType in the WAM application.
	This component calls the W1- InventoryLocationType business object using the Inbound Web Service.

Component	Description
W1-MeterRdWithRollOverMeasType	Used to create, update, read, or delete MeterRdWithRollOverMeasType in the WAM application.
	This component calls the W1-MeterRdWithRollOverMeasType business object using the Inbound Web Service.
W1-MeteredReadRollover	Used to create, update, read, or delete MeteredReadRollover in the WAM application.
	This component calls the W1-MeteredReadRollover business object using the Inbound Web Service.
W1-MsrmtNumericGaugeReason	Used to create, update, read, or delete MsrmtNumericGaugeReason in the WAM application.
	This component calls the W1- MsrmtNumericGaugeReason business object using the Inbound Web Service.
W1-MsrmtNumericMeterReason	Used to create, update, read, or delete MsrmtNumericMeterReason in the WAM application.
	This component calls the W1- MsrmtNumericMeterReason business object using the Inbound Web Service.
W1-MsrtQuckEntryCmplEvtType	Used to create, update, read, or delete MsrtQuckEntryCmplEvtType in the WAM application.
	This component calls the W1- MsrtQuckEntryCmplEvtType business object using the Inbound Web Service.
W1-NormalizationGenrlWeighted	Used to create, update, read, or delete NormalizationGenrlWeighted in the WAM application.
	This component calls the W1- NormalizationGenrlWeighted business object using the Inbound Web Service.
W1-NormalizationPercentOfNew	Used to create, update, read, or delete NormalizationPercentOfNew in the WAM application.
	This component calls the W1- NormalizationPercentOfNew business object using the Inbound Web Service.

Component	Description
W1-PermitOnlyChecklistType	Used to create, update, read, or delete PermitOnlyChecklistType in the WAM application
	This component calls the W1- PermitOnlyChecklistType business object using the Inbound Web Service.
W1-SeederSyncReqMasterConfig	Used to create, update, read, or delete SeederSyncReqMasterConfig in the WAM application.
	This component calls the W1- SeederSyncReqMasterConfig business object using the Inbound Web Service.
W1-SrvHistFromActTyCmplEvtType	Used to create, update, read, or delete SrvHistFromActTyCmplEvtType in the WAM application.
	This component calls the W1- SrvHistFromActTyCmplEvtType business object using the Inbound Web Service.
W2-ServicePointWarning	Used to create, update, read, or delete ServicePointWarning in the WAM application.
	This component calls the W2-ServicePointWarning business object using the Inbound Web Service.
W2-Key	Used to create, update, read, or delete Key in the WAM application.
	This component calls the W2-Key business object using the Inbound Web Service
W2-SynchronizationAddSP	Used to create, update, read, or delete SynchronizationAddSP in the WAM application.
	This component calls the W2- SynchronizationAddSP business object using the Inbound Web Service.
W1-ActivityCompletionEventType	Used to create, update, read, or delete ActivityCompletionEventType in the WAM application.
	This component calls the W1- ActivityCompletionEventType business object usin the Inbound Web Service.

Component	Description
W1- AssetCompletionEventType	Used to create, update, read, or delete AssetCompletionEventType in the WAM application.
	This component calls the W1- AssetCompletionEventType business object using the Inbound Web Service.
W1- AssetDposCmpEvtType	Used to create, update, read, or delete AssetDposCmpEvtType in the WAM application.
	This component calls the W1- AssetDposCmpEvtType business object using the Inbound Web Service.
W1- AssetLocationType	Used to create, update, read, or delete AssetLocationType in the WAM application.
	This component calls the W1- AssetLocationType business object using the Inbound Web Service.
W1- AssetType	Used to create, update, read, or delete AssetType in the WAM application.
	This component calls the W1-AssetType business object using the Inbound Web Service.
W1- ComponentType	Used to create, update, read, or delete ComponentType in the WAM application.
	This component calls the W1-ComponentType business object using the Inbound Web Service
W1- DataAreaCmpEvtType	Used to create, update, read, or delete DataAreaCmpEvtType in the WAM application.
	This component calls the W1- DataAreaCmpEvtType business object using the Inbound Web Service.
W1- GeneralCompletionEventType	Used to create, update, read, or delete GeneralCompletionEventType in the WAM application.
	This component calls the W1- GeneralCompletionEventType business object using the Inbound Web Service.
W1-OrganizationType	Used to create, update, read, or delete OrganizationType in the WAM application.
	This component calls the W1-OrganizationType business object using the Inbound Web Service.

Component	Description
W1- ReplicationComplEventType	Used to create, update, read, or delete ReplicationComplEventType in the WAM application.
	This component calls the W1- ReplicationComplEventType business object using the Inbound Web Service.
W1-AmtBasedAppvlProf	Used to create, update, read, or delete AmtBasedAppvlProf in the WAM application.
	This component calls the W1-AmtBasedAppvlProf business object using the Inbound Web Service.
W1-AssessmentClass	Used to create, update, read, or delete AssessmentClass in the WAM application.
	This component calls the W1-AssessmentClass business object using the Inbound Web Service.
W1-AssessmentGroup	Used to create, update, read, or delete AssessmentGroup in the WAM application.
	This component calls the W1-AssessmentGroup business object using the Inbound Web Service.
W1-AssetTypeAverageCost	Used to create, update, read, or delete AssetTypeAverageCost in the WAM application.
	This component calls the W1- AssetTypeAverageCost business object using the Inbound Web Service.
W1-BillableRate	Used to create, update, read, or delete BillableRate in the WAM application.
	This component calls the W1-BillableRate business object using the Inbound Web Service.
W1-BusinessUnit	Used to create, update, read, or delete BusinessUnit in the WAM application.
	This component calls the W1-BusinessUnit business object using the Inbound Web Service.
W1-Buyer	Used to create, update, read, or delete Buyer in the WAM application.
	This component calls the W1-Buyer business object using the Inbound Web Service.
W1-CalendarAnniversary	Used to create, update, read, or delete CalendarAnniversary in the WAM application.
	This component calls the W1-CalendarAnniversary business object using the Inbound Web Service.

Component	Description
W1-CalendarInterval	Used to create, update, read, or delete CalendarInterval in the WAM application.
	This component calls the W1-CalendarInterval business object using the Inbound Web Service.
W1-CapabilityType	Used to create, update, read, or delete CapabilityType in the WAM application.
	This component calls the W1-CapabilityType business object using the Inbound Web Service.
W1-Circle	Used to create, update, read, or delete Circle in the WAM application.
	This component calls the W1-Circle business object using the Inbound Web Service.
W1-Color	Used to create, update, read, or delete Color in the WAM application.
	This component calls the W1-Color business object using the Inbound Web Service.
W1-CommodityCategory	Used to create, update, read, or delete CommodityCategory in the WAM application.
	This component calls the W1-CommodityCategory business object using the Inbound Web Service.
W1-CommodityName	Used to create, update, read, or delete CommodityName in the WAM application.
	This component calls the W1-CommodityName business object using the Inbound Web Service.
W1-CommodityType	Used to create, update, read, or delete CommodityType in the WAM application.
	This component calls the W1-CommodityType business object using the Inbound Web Service.
W1-ComponentTypeAverageCost	Used to create, update, read, or delete ComponentTypeAverageCost the in WAM application.
	This component calls the W1- ComponentTypeAverageCost business object using the Inbound Web Service.
W1-ContactType	Used to create, update, read, or delete ContactType in the WAM application.
	This component calls the W1-ContactType busines object using the Inbound Web Service.

Component	Description
W1-CostCategory	Used to create, update, read, or delete CostCategory in the WAM application.
	This component calls the W1-CostCategory business object using the Inbound Web Service.
W1-CostCenter	Used to create, update, read, or delete CostCenter in the WAM application.
	This component calls the W1-CostCenter business object Inbound Web Service.
W1-Course	Used to create, update, read, or delete Course in the WAM application.
	This component calls the W1-Course business object using the Inbound Web Service.
W1-CrewType	Used to create, update, read, or delete CrewType in the WAM application.
	This component calls the W1-CrewType business object using the Inbound Web Service.
W1-DailyScheduleType	Used to create, update, read, or delete DailyScheduleType in the WAM application.
	This component calls the W1-DailyScheduleType business object using the Inbound Web Service.
W1-DistributionCode	Used to create, update, read, or delete DistributionCode in the WAM application.
	This component calls the W1-DistributionCode business object using the Inbound Web Service.
W1-DocActType	Used to create, update, read, or delete DocActType in the WAM application.
	This component calls the W1-DocActType business object using the Inbound Web Service.
W1-DocCmplEvntType	Used to create, update, read, or delete DocCmplEvntType in the WAM application.
	This component calls the W1-DocCmplEvntType business object using the Inbound Web Service.
W1-DocumentType	Used to create, update, read, or delete DocumentType in the WAM application.
	This component calls the W1-DocumentType business object using the Inbound Web Service.

Component	Description
W1-EmployeeType	Used to create, update, read, or delete EmployeeType in the WAM application.
	This component calls the W1-EmployeeType business object using the Inbound Web Service.
W1-Equipment	Used to create, update, read, or delete Equipment in the WAM application.
	This component calls the W1-Equipment business object using the Inbound Web Service.
W1-ExpenseCode	Used to create, update, read, or delete ExpenseCode in the WAM application.
	This component calls the W1-ExpenseCode business object using the Inbound Web Service.
W1-Factor	Used to create, update, read, or delete Factor in the WAM application.
	This component calls the W1-Factor business object using the Inbound Web Service.
W1-FactorValue	Used to create, update, read, or delete FactorValue ir the WAM application.
	This component calls the W1-FactorValue business object using the Inbound Web Service.
W1-FailureComponent	Used to create, update, read, or delete FailureComponent in the WAM application.
	This component calls the W1-FailureComponent business object using the Inbound Web Service.
W1-FailureMode	Used to create, update, read, or delete FailureMode in the WAM application.
	This component calls the W1-FailureMode business object using the Inbound Web Service.
W1-FailureProfile	Used to create, update, read, or delete FailureProfile in the WAM application.
	This component calls the W1-FailureProfile business object using the Inbound Web Service.
W1-FailureProfileFailureComp	Used to create, update, read, or delete FailureProfileFailureComp in the WAM application
	This component calls the W1- FailureProfileFailureComp business object using the Inbound Web Service.

Component	Description
W1-FailureProfileFailureMode	Used to create, update, read, or delete FailureProfileFailureMode in the WAM application
	This component calls the W1- FailureProfileFailureMode business object using the Inbound Web Service.
W1-FailureProfileFailureRepair	Used to create, update, read, or delete FailureProfileFailureRepair in the WAM application
	This component calls the W1- FailureProfileFailureRepair business object using th Inbound Web Service.
W1-FailureProfileFailureType	This component can be used to create/update/ read/delete FailureProfileFailureType in WAM application.
	This component calls the business object W1- FailureProfileFailureType using the Inbound Web Service.
W1-FailureRepair	Used to create, update, read, or delete FailureRepai in the WAM application.
	This component calls the W1-FailureRepair busines object using the Inbound Web Service.
W1-FailureType	Used to create, update, read, or delete FailureType is the WAM application.
	This component calls the W1-FailureType business object using the Inbound Web Service.
W1-FinancialMasterConfig	Used to create, update, read, or delete FinancialMasterConfig in the WAM application.
	This component calls the W1- FinancialMasterConfig business object using the Inbound Web Service.
W2-SynchronizationAddSP	Used to create, update, read, or delete SynchronizationAddSP in the WAM application.
	This component calls the W2- SynchronizationAddSP business object using the Inbound Web Service.
W2-ServicePointWarning	Used to create, update, read, or delete ServicePointWarning in the WAM application.
	This component calls the W2-ServicePointWarning business object using the Inbound Web Service.

Component	Description
W2-Key	Used to create, update, read, or delete Key in the WAM application.
	This component calls the W2-Key business object using the Inbound Web Service.
W1-Fob	Used to create, update, read, or delete Fob in the WAM application.
	This component calls the W1-Fob business object using the Inbound Web Service.
W1-Function	Used to create, update, read, or delete Function in the WAM application.
	This component calls the W1-Function business object using the Inbound Web Service.
W1-FunctionType	Used to create, update, read, or delete FunctionType in the WAM application.
	This component calls the W1-FunctionType business object using the Inbound Web Service.
W1- GaugeReadWithThresholdMeasType	Used to create, update, read, or delete GaugeReadWithThresholdMeasType in the WAM application.
	This component calls the W1- GaugeReadWithThresholdMeasType business objec using the Inbound Web Service.
W1-GeneralAssetLocationType	This component can be used to create/update/ read/delete GeneralAssetLocationType in WAM application. This component calls the business object Inbound Web Service.
W1-GeneralCompletionEventType	Used to create, update, read, or delete GeneralCompletionEventType in the WAM application.
	This component calls the W1- GeneralCompletionEventType business object using the Inbound Web Service.
W1-InventoryMgmtMasterConfig	Used to create, update, read, or delete InventoryMgmtMasterConfig in the WAM application.
	This component calls the W1- InventoryMgmtMasterConfig business object using the Inbound Web Service.

Component	Description
W1-LaborEarningType	Used to create, update, read, or delete LaborEarningType in the WAM application.
	This component calls the W1-LaborEarningType business object using the Inbound Web Service.
W1-LeaveType	Used to create, update, read, or delete LeaveType in the WAM application.
	This component calls the W1-LeaveType business object using the Inbound Web Service.
W1-Line	Used to create, update, read, or delete Line in the WAM application.
	This component calls the W1-Line business object using the Inbound Web Service.
W1-LinearAssetLocationType	Used to create, update, read, or delete LinearAssetLocationType in the WAM application.
	This component calls the W1- LinearAssetLocationType business object using the Inbound Web Service.
W1-MeasurementUOM	Used to create, update, read, or delete MeasurementUOM in the WAM application.
	This component calls the W1-MeasurementUOM business object using the Inbound Web Service.
W1- MeterReadWithRollOverMeasType	Used to create, update, read, or delete MeterReadWithRollOverMeasType in the WAM application.
	This component calls the W1- MeterReadWithRollOverMeasType business object using the Inbound Web Service.
W1-MsrtQuckEntryCmplEvtTyp	Used to create, update, read, or delete MsrtQuckEntryCmplEvtTyp in the WAM application.
	This component calls the W1- MsrtQuckEntryCmplEvtTyp business object using the Inbound Web Service.
W1-MTBFMT*TRBuckets	Used to create, update, read, or delete MTBFMTTRBuckets in the WAM application.
	This component calls the W1-MTBFMTTRBucket business object using the Inbound Web Service.

Component	Description
W1-NoAppvlRequiredProf	Used to create, update, read, or delete NoAppvlRequiredProf in the WAM application.
	This component calls the W1- NoAppvlRequiredProf business object using the Inbound Web Service.
W1-NonAmtBasedAppvlProf	Used to create, update, read, or delete NonAmtBasedAppvlProf in the WAM application.
	This component calls the W1- NonAmtBasedAppvlProf business object using the Inbound Web Service.
W1-NumericGauge	Used to create, update, read, or delete NumericGauge in the WAM application.
	This component calls the W1-NumericGauge business object using the Inbound Web Service.
W1-NumericMeter	Used to create, update, read, or delete NumericMeter in the WAM application.
	This component calls the W1-NumericMeter business object using the Inbound Web Service.
W1-OrganizationType	Used to create, update, read, or delete OrganizationType in the WAM application.
	This component calls the W1-OrganizationType business object using the Inbound Web Service.
W1-OutboundActivityType	Used to create, update, read, or delete OutboundActivityType in the WAM application.
	This component calls the W1- OutboundActivityType business object using the Inbound Web Service.
W1-Planner	Used to create, update, or delete Planner in the WAM application.
	This component calls W1-Planner business object using the Inbound Web Service ATW1Planner.
W1-OvertimeType	Used to create, update, read, or delete OvertimeType in the WAM application.
	This component calls the W1-OvertimeType business object using the Inbound Web Service.
W1-PaymentTerm	Used to create, update, read, or delete PaymentTerm in the WAM application.
	This component calls the W1-PaymentTerm business object using the Inbound Web Service.

Component	Description
W1-PersonWAM	Used to create, update, read, or delete PersonWAM in the WAM application.
	This component calls the W1-PersonWAM business object using the Inbound Web Service.
W1-PlantAssetLocationType	Used to create, update, read, or delete PlantAssetLocationType in the WAM application.
	This component calls the W1- PlantAssetLocationType business object using the Inbound Web Service.
W1-ProjectCategory	Used to create, update, read, or delete ProjectCategory in the WAM application.
	This component calls the W1-ProjectCategory business object using the Inbound Web Service
W1-PurchaseCommodity	Used to create, update, read, or delete PurchaseCommodity in the WAM application.
	This component calls the W1-PurchaseCommodity business object using the Inbound Web Service.
W1-PurchasingMasterConfig	Used to create, update, read, or delete PurchasingMasterConfig in the WAM application.
	This component calls the W1- PurchasingMasterConfig business object using the Inbound Web Service.
W1-Question	Used to create, update, read, or delete Question in the WAM application.
	This component calls the W1-Question business object using the Inbound Web Service.
W1-ReadLogEntry	Used to read ReadLogEntry in the WAM application.
	This component uses the W1-ReadLogEntry business Service using the Inbound Web Service.
W1-ReadWithNoEvaluateMeasType	Used to create, update, read, or delete ReadWithNoEvaluateMeasType in the WAM application.
	This component calls the W1- ReadWithNoEvaluateMeasType business object using the Inbound Web Service.
W1-ResourceUOM	Used to create, update, read, or delete ResourceUOM in the WAM application.
	This component calls the W1-ResourceUOM business object using the Inbound Web Service.

Component	Description
W1-ScheduledActivityType	Used to create, update, read, or delete ScheduledActivityType in the WAM application.
	This component calls the W1- ScheduledActivityType business object using the Inbound Web Service.
W1-ScheduledActivityTypeWAM	Used to create, update, read, or delete ScheduledActivityTypeWAM in the WAM application.
	This component calls the W1- ScheduledActivityTypeWAM business object using the Inbound Web Service.
W1-SchedulePlanType	Used to create, update, read, or delete SchedulePlanType in the WAM application.
	This component calls the W1-SchedulePlanType business object using the Inbound Web Service.
W1- ServHistFromActTypeCmplEvntType	Used to create, update, read, or delete ServHistFromActTypeCmplEvntType in the WAM application.
	This component calls the W1- ServHistFromActTypeCmplEvntType business object using the Inbound Web Service.
W1-ServiceArea	Used to create, update, read, or delete ServiceArea in the WAM application.
	This component calls the W1-ServiceArea business object using the Inbound Web Service.
W1-ServiceClass	Used to create, update, read, or delete ServiceClass in the WAM application.
	This component calls the W1-ServiceClass business object using the Inbound Web Service.
W1-ShiftPlanTemplate	Used to create, update, or delete Shift Plan Template in the WAM application. This component calls the business object W1- ShiftPlanTemplate using the Inbound Web Service.
W1-ServiceHistoryType	Used to create, update, read, or delete ServiceHistoryType in the WAM application.
	This component calls the W1-ServiceHistoryType business object using the Inbound Web Service.

Component	Description
W1-ServiceHistTypeCmpEvtType	Used to create, update, read, or delete ServiceHistTypeCmpEvtType in the WAM application.
	This component calls the W1- ServiceHistTypeCmpEvtType business object using the Inbound Web Service.
W1-StorageLocationType	Used to create, update, read, or delete StorageLocationType in the WAM application.
	This component calls the W1-StorageLocationType business object using the Inbound Web Service.
W1-TaxRateSchedule	Used to create, update, read, or delete TaxRateSchedule in the WAM application.
	This component calls the W1-TaxRateSchedule business object using the Inbound Web Service.
W1-TimePeriod	Used to create, update, read, or delete TimePeriod in the WAM application.
	This component calls the W1-TimePeriod business object using the Inbound Web Service.
W1-WorkCalendar	Used to create, update, read, or delete WorkCalenda in the WAM application.
	This component calls the W1-WorkCalendar business object using the Inbound Web Service.
W1-WorkManagementMasterConfig	Used to create, update, read, or delete WorkManagementMasterConfig in the WAM application.
	This component calls the W1- WorkManagementMasterConfig business object using the Inbound Web Service.
W1-WorkPriorityBuckets	Used to create, update, read, or delete WorkPriorityBuckets in the WAM application.
	This component calls the W1-WorkPriorityBuckets business object using the Inbound Web Service.
W1-WorkReqCompletionEventType	Used to create, update, read, or delete WorkReqCompletionEventType in the WAM application.
	This component calls the W1- WorkReqCompletionEventType business object using the Inbound Web Service.

Component	Description
W1-WAssetInstallAgeBuckets	Used to create, update, read, or delete WAssetInstallAgeBuckets in the WAM application.
	This component calls the W1- WAssetInstallAgeBuckets business object using the Inbound Web Service.
W1-WAssetAgeBuckets	Used to create, update, read, or delete WAssetAgeBuckets in the WAM application.
	This component calls the W1-WAssetAgeBuckets business object using the Inbound Web Service.
W1-WAMBIExtractParameters	Used to create, update, read, or delete WAMBIExtractParameters in the WAM application
	This component calls the W1- WAMBIExtractParameters business object using th Inbound Web Service.
W1-QuestionnaireSvcHistType	Used to create, update, read, or delete QuestionnaireSvcHistType in the WAM application
	This component calls the W1- QuestionnaireSvcHistType business object using th Inbound Web Service.
W1-NumberOfCyclesOverdueBucket	Used to create, update, read, or delete NumberOfCyclesOverdueBucket in the WAM application.
	This component calls the W1- NumberOfCyclesOverdueBucket business object using the Inbound Web Service.
W1-AssetCriticalityBuckets	Used to create, update, read, or delete AssetCriticalityBuckets in the WAM application.
	This component calls the W1- AssetCriticalityBuckets business object using the Inbound Web Service.
W1-AssetConditionScoreBuckets	Used to create, update, read, or delete AssetConditionScoreBuckets in the WAM application.
	This component calls the W1- AssetConditionScoreBuckets business object using the Inbound Web Service.

Component	Description
W1-GeneralCompletionEventType	Used to create, update, read, or delete GeneralCompletionEventType in the WAM application.
	This component calls the W1- GeneralCompletionEventType business object using the Inbound Web Service.
W1- ResourceMgmntMasterConfig	Used to create, update, read, or delete ResourceMgmntMasterConfigin the WAM application.
	This component calls the W1- ResourceMgmntMasterConfig business object using the Inbound Web Service.
W1-NUMGAUGESQL	Used to read/retrieve an Asset ID using Measurement ID.
	This component calls the CM-NUMGAUGE business service using the ATW1NUMGAUGESQI Inbound Web Service.
W1-NUMMETERSQL	Used to read/retrieve Measurement ID by using Measurement Type and Asset ID.
	This component calls the CM- NUMMETER business service using the ATW1NUMMETERSQI Inbound Web Service.
W1-SVCHSTWAMSQL	Used to read/retrieve Service History ID using Act ID.
	This component calls the CM-SVCHSTWAM business service using the ATW1SVCHSTWAMSQL Inbound Web Service.
W2-SmartMeterConfiguration	Used to create, update, read, or delete SmartMeterConfiguration in the WAM application.
	This component calls the W2- SmartMeterConfiguration business object using the Inbound Web Service.
W2-SiteLocation	Used to create, update, read, or delete SiteLocation in the WAM Apalication.
	This component calls the W2-SiteLocation business object using the Inbound Web Service.
W2-ServicePointInstruction	Used to create, update, read, or delete ServicePointInstruction in the WAM application.
	This component calls the W2- ServicePointInstruction business object using the Inbound Web Service.

Component	Description
W2-ManualMeterConfiguration	Used to create, update, read, or delete ManualMeterConfiguration in the WAM application
	This component calls the W2- ManualMeterConfiguration business object using the Inbound Web Service.
W2-CommunicationComponentCfg	Used to create, update, read, or delete CommunicationComponentCfg in the WAM application.
	This component calls the W2- CommunicationComponentCfg business object using the Inbound Web Service.
W1-WAMToGISSyncMapping	Used to create, update, read, or delete WAMToGISSyncMapping in the WAM application
	This component calls the W1- WAMToGISSyncMapping business object using the Inbound Web Service.
W1-SOMActivityType	Used to create, update, read, or delete SOMActivityTypein the WAM Application This component calls the W1-SOMActivityType business object using the Inbound Web Service.
W1- PlannerWOSummary	Used to create, update, read, or delete PlannerWOSummary in the WAM application.
	This component calls the W1-PlannerWOSummary business object using the Inbound Web Service.
W1- AdjustmentType	Used to create, update, read, or delete AdjustmentType in the WAM application.
	This component calls the W1-AdjustmentType business object using the Inbound Web Service.
W1- BatchLoaderRequestType	Used to create, update, read, or delete BatchLoaderRequestType in the WAM application.
	This component calls the W1- BatchLoaderRequestType business object using the Inbound Web Service.
W1- ChangeRequestType	Used to create, update, read, or delete ChangeRequestType in the WAM application.
	This component calls the W1- ChangeRequestType business object using the ATW1ChangeRequestTyp Inbound Web Service.

Component	Description
W1- ChangeRequestRelatedObject	Used to create, update, read, or delete ChangeRequestRelatedObject in the WAM application.
	This component calls the W1- ChangeRequestRelatedObject business object using the ATW1 ChangeRequestRelatedObject Inbound Web Service.
W1-AccessGroupTables	Used to create, update, read, or delete AccessGroupTables in the WAM application.
	This component calls the W1-AccessGroupTables business object using the ATW1AccessGroupTables Inbound Web Service.
W1-AssetDisposition	Used to create, update, read, or delete AssetDisposition in the WAM application.
	This component calls the W1- AssetDisposition business object using the ATW1AssetDisposition Inbound Web Service.
W1-ERPIntegrationMasterConfig	Used to create, update, read, or delete ERPIntegrationMasterConfig in the WAM application.
	This component calls the W1- ERPIntegrationMasterConfig business object using the ATW1ERPIntegrationMasterConfig Inbound Web Service.
W1-HCMIntegrationMasterConfig	Used to create, update, read, or delete HCMIntegrationMasterConfig in the WAM application.
	This component calls the W1- HCMIntegrationMasterConfig business object using the ATW1HCMIntegrationMasterConfigInbound Web Service.
W1-TimShtQuickEntryCmplEvtType	Used to create, update, read, or delete Time Sheet Quick Entry Completion Event Types in the WAM application.
	This component calls the W1- TimShtQuickEntryCmplEvtType business object using the ATW1TimShtQuickEntryCmplEvtType Inbound Web Service.

Component	Description
W1-InspectionTypeDeficiency	Used to create, update, read, or delete InspectionTypeDeficiency in the WAM application.
	This component calls the W1- InspectionTypeDeficiency business object using the ATW1InspectionTypeDeficiency Inbound Web Service.
W1-InspectionTypePercentOfNew	Used to create, update, read, or delete InspectionTypePercentOfNew in the WAM application.
	This component calls the W1- InspectionTypePercentOfNew business object using the ATW1InspectionTypePercentOfNew Inbound Web Service.
W1-ResetAssetConditionRatinSHT	Used to create, update, read, or delete ResetAssetConditionRatinSHT in the WAM application.
	This component calls the W1- ResetAssetConditionRatinSHT business object using the ATW1ResetAssetConditionRatinSHT Inbound Web Service.
W1- ItemConfiguration	Used to create, update, read, or delete ItemConfiguration in the WAM application.
	This component calls the W1-ItemConfiguration business object using the ATW1ItemConfiguration Inbound Web Service.
W1-Timekeeper	Used to create, update, read, or delete Timekeeper in the WAM application.
	This component calls the W1-Timekeeper business object using the ATW1Timekeeper Inbound Web Service.

Asset Management

Component	Description
W1-CalendarWarranty	Used to create, update, read, or delete CalendarWarranty in the WAM application.
	This component calls the W1-CalendarWarranty business object using the Inbound Web Service.

Component	Description
W1-CalendarWarrantyTerm	Used to create, update, read, or delete CalendarWarrantyTerm in the WAM application.
	This component calls the W1- CalendarWarrantyTerm business object using the Inbound Web Service.
W2-CommunicationComponent	Used to create, update, read, or delete CommunicationComponent in the WAM application.
	This component calls the W2- CommunicationComponent business object using the Inbound Web Service.
W2-CommunicationRelay	Used to create, update, read, or delete CommunicationRelay in the WAM application.
	This component calls the W2-CommunicationRela business object using the Inbound Web Service.
W2-ServicePoint	Used to create, update, read, or delete ServicePoint in the WAM application.
	This component calls the W2-ServicePoint busines object using the Inbound Web Service.
W2-SmartMeter	Used to create, update, read, or delete SmartMeter i the WAM application.
	This component calls the W2-SmartMeter business object using the Inbound Web Service.
W2-CommunicationComponentSpec	Used to create, update, read, or delete CommunicationComponentSpec in the WAM application.
	This component calls the W2- CommunicationComponentSpec business object using the Inbound Web Service.
W2-CommunicationRelaySpec	Used to create, update, read, or delete CommunicationRelaySpec in the WAM application
	This component calls the W2- CommunicationRelaySpec business object using th Inbound Web Service.
W1-FailureServiceHistory	Used to create, update, read, or delete FailureServiceHistory in the WAM application.
	This component calls the W1-FailureServiceHistor business object using the Inbound Web Service.

Component	Description
W2-FirmwareSpecification	Used to create, update, read, or delete FirmwareSpecification in the WAM application.
	This component calls the W2-FirmwareSpecification business object using the Inbound Web Service.
W1-FirmwareVersion	Used to create, update, read, or delete FirmwareVersion in the WAM application.
	This component calls the W1-FirmwareVersion business object using the Inbound Web Service.
W1-GeneralAssetLocation	Used to create, update, read, or delete GeneralAssetLocation in the WAM application.
	This component calls the W1-GeneralAssetLocation business object using the Inbound Web Service.
W1-InOutofServiceGeneralAsset	Used to create, update, read, or delete InOutofServiceGeneralAsset in the WAM application.
	This component calls the W1- InOutofServiceGeneralAsset business object using the Inbound Web Service.
W1-IOSvcGeneralComponent	Used to create, update, read, or delete InOutofServiceGeneralComponent in the WAM application.
	This component calls the W1- IOSvcGeneralComponent business object using the Inbound Web Service.
W1-IOSvcFleetAsset	Used to create, update, read, or delete IOSvcFleetAsset in the WAM application.
	This component calls the W1-IOSvcFleetAsset business object using the Inbound Web Service.
W1-IOSvcInfrastructureAsset	Used to create, update, read, or delete IOSvcInfrastructureAsset in the WAM application.
	This component calls the W1- IOSvcInfrastructureAsset business object using the Inbound Web Service.
W1-IOSvcITAsset	Used to create, update, read, or delete IOSvclTAsse in WAM the application.
	This component calls the W1-IOSvcITAsset business object using the Inbound Web Service.

Component	Description
W1-InOutSvcAsset	Used to create, update, read, or delete W1- InOutSvcAsset in WAM the application.
	This component calls the W1-InOutSvcAsset business object using the Inbound Web Service.
W1-InOutSvcComponent	Used to create, update, read, or delete W1- InOutSvcComponent in WAM the application.
	This component calls the W1-InOutSvcComponent business object using the Inbound Web Service.
W1-AssetLocation	Used to create, update, read, or delete W1- AssetLocation in WAM the application.
	This component calls the W1-AssetLocation business object using the Inbound Web Service.
W1-ServiceHistory	Used to create, update, read, or delete ServiceHistory in the WAM application.
	This component calls the W1-ServiceHistory business object using the Inbound Web Service.
W1-ServiceHistoryWAM	Used to create, update, read, or delete ServiceHistory in the WAM application.
	This component calls the W1- ServiceHistory(Deficiency/General Weighted/ Percent of New)business object using the Inbound Web Service.
W1-StoreroomInventoryMgmt	Used to create, update, read, or delete StoreroomInventoryMgmt in the WAM application.
	This component calls the W1- StoreroomInventoryMgmt business object using the Inbound Web Service.
W1-TrackedFleetSpecification	Used to create, update, read, or delete TrackedFleetSpecification in the WAM application.
	This component calls the W1- TrackedFleetSpecification business object using the Inbound Web Service.
W1-TrackedITSpecification	Used to create, update, read, or delete TrackedITSpecification in the WAM application.
	This component calls the W1- TrackedITSpecification business object using the Inbound Web Service.

Component	Description
W1-TrackedInfrastructureSpec	Used to create, update, read, or delete TrackedInfrastructureSpec in the WAM application
	This component calls the W1- TrackedInfrastructureSpec business object using the Inbound Web Service.
W1-MsrmtQuickEntryCmplEvt	Used to create, update, read, or delete MsrmtQuickEntryCmplEvt in the WAM application.
	This component calls the W1- MsrmtQuickEntryCmplEvt business object using the Inbound Web Service.
W1-IOSvcITComponent	Used to create, update, read, or delete IOSvcITComponent in the WAM application.
	This component calls the W1-IOSvcITComponent business object using the Inbound Web Service.
W1-LinearAssetLocation	Used to create, update, read, or delete LinearAssetLocation in the WAM application.
	This component calls the W1-LinearAssetLocation business object using the Inbound Web Service.
W2-ManualMeterSpecification	Used to create, update, read, or delete ManualMeterSpecification in the WAM application.
	This component calls the W2- ManualMeterSpecification business object using the Inbound Web Service.
W1-Manufacturer	Used to create, update, read, or delete Manufacturer in the WAM application.
	This component calls the W1-Manufacturer business object using the Inbound Web Service.
W1-MsrmtQuickEntryActivity	Used to create, update, read, or delete MsrmtQuickEntryActivity in the WAM application.
	This component calls the W1- MsrmtQuickEntryActivity business object using the Inbound Web Service.
W1-Organization	Used to create, update, read, or delete Organization in the WAM application.
	This component calls the W1-Organization business object using the Inbound Web Service.

Component	Description
W1-PlantAssetLocation	Used to create, update, read, or delete PlantAssetLocation in the WAM application.
	This component calls the W1-PlantAssetLocation business object using the Inbound Web Service.
W1-QuestionnaireSvcHist	Used to create, update, read, or delete QuestionnaireSvcHist in the WAM application.
	This component calls the W1-QuestionnaireSvcHist business object using the Inbound Web Service.
W1-RuntimeAnniversary	Used to create, update, read, or delete RuntimeAnniversary in the WAM application.
	This component calls the W1-RuntimeAnniversary business object using the Inbound Web Service.
W1-RuntimeInterval	Used to create, update, read, or delete RuntimeInterval in the WAM application.
	This component calls the W1-RuntimeInterval business object using the Inbound Web Service.
W1-RuntimeWarranty	Used to create, update, read, or delete RuntimeWarranty in the WAM application.
	This component calls the W1-RuntimeWarranty business object using the Inbound Web Service.
W1-RuntimeWarrantyTerm	Used to create, update, read, or delete RuntimeWarrantyTerm in the WAM application.
	This component calls the W1- RuntimeWarrantyTerm business object using the Inbound Web Service.
W2-ServicePoint	Used to create, update, read, or delete ServicePoint in the WAM application.
	This component calls the W2-ServicePoint business object using the Inbound Web Service.
W2-SmartMeterSpecification	Used to create, update, read, or delete SmartMeterSpecification in the WAM application.
	This component calls the W2- SmartMeterSpecification business object using the Inbound Web Service.
W1-StorageLocation	Used to create, update, read, or delete StorageLocation in the WAM application.
	This component calls the W1-StorageLocation business object using the Inbound Web Service.

Component	Description
W1-TrackedGeneralAsset	Used to create, update, read, or delete TrackedGeneralAsset in the WAM application.
	This component calls the W1-TrackedGeneralAsse business object using the Inbound Web Service.
W1-TrackedGeneralComponent	Used to create, update, read, or delete TrackedGeneralComponent in the WAM application.
	This component calls the W1- TrackedGeneralComponent business object using the Inbound Web Service.
W1-TrackedGeneralSpecification	Used to create, update, read, or delete TrackedGeneralSpecification in the WAM application.
	This component calls the W1- TrackedGeneralSpecification business object using the Inbound Web Service.
W1-TrackedITAsset	Used to create, update, read, or delete TrackedITAsset in the WAM application.
	This component calls the W1-TrackedITAsset business object using the Inbound Web Service.
W1-TrackedITComponent	Used to create, update, read, or delete TrackedITComponent in the WAM application.
	This component calls the W1-TrackedlTComponer business object using the Inbound Web Service.
W2-Vehicle	Used to create, update, read, or delete Vehicle in th WAM application.
	This component calls the W2-Vehicle business object using the Inbound Web Service.
W1-ServiceCondition	Used to create, update, read, or delete ServiceCondition in the WAM Application.
	This component calls the W1-ServiceCondition business object using the ATW1ServiceCondition Inbound Web Service.
W1- AssetTypePerformance	Used to update or read, AssetTypePerformance in the WAM application.
	This component calls the W2- AssetTypePerformance business object using the Inbound Web Service.

Component	Description
W1- AssetPerformance	Used to update, read, or delete AssetPerformance in the WAM application.
	This component calls the W1- AssetPerformance business object using the ATW1 AssetPerformance Inbound Web Service.
W2- ManualMeter	Used to update, read, or delete ManualMeter in the WAM application.
	This component calls the W2- ManualMeter business object using the ATW2ManualMeter Inbound Web Service.
W1- Specification	Used to update, read, or delete Specificationin the WAM application.
	This component calls the W1- Specification business object using the ATW2ManualMeter Inbound Web Service.
W1- SiteLocation	Used to update, read, or delete SiteLocation the WAM application.
	This component calls the W1- SiteLocation business object using the ATW1SiteLocation Inbound Web Service.
W1-ResetAssetConditionRatingSH	Used to update, read, or delete ResetAssetConditionRatingServiceHistory in the WAM application.
	This component calls the W1- ResetAssetConditionRatingSH business object using the ATW1ResetAssetConditionRatingSH Inbound Web Service.
W1- Item	Used to update, read, or delete Item in the WAM application.
	This component calls the W1-Item business object using the ATW1Item Inbound Web Service.
W1- AssetDownTime	Used to update, read, or delete AssetDownTime in the WAM application.
	This component calls the W1-AssetDownTime business object using the ATW1AssetDownTime Inbound Web Service.
W1-InspectionDeficiency	Used to update, read, or delete InspectionDeficiency in the WAM application.
	This component calls the W1-InspectionDeficiency business object using the ATW1InspectionDeficiency Inbound Web Service.

Component	Description
W1-InspectionPercentOfNew	Used to update, read, or delete InspectionPercentOfNew in the WAM application.
	This component calls the W1- InspectionPercentOfNew business object using the ATW1InspectionPercentOfNew Inbound Web Service.
W1- ItemSpecification	Used to update, read, or delete ItemSpecification in the WAM application.
	This component calls the W1-ItemSpecification business object using the ATW1ItemSpecification Inbound Web Service.
W1- ProcessType	Used to update, read, or delete ProcessType in theWAM application.
	This component calls the W1- Process Type business object using the ATW1 Process Type Inbound Web Service.
W1- MobileUpdWorkedAssetCmpEvt	Used to update, read, or delete MobileUpdWorkedAssetCmpEvt in the WAM application.
	This component calls the W1- MobileUpdWorkedAssetCmpEvt business object using the ATW1MobileUpdWorkedAssetCmpEvt Inbound Web Service.
W1- Process	Used to update, read, or delete Process in the WAM application.
	This component calls the W1- Process business object using the ATW1Process Inbound Web Service.
W1- ASTATT	Used to update, read, or delete ASTATT in the WAM application.
	This component calls the W1- ASTATT business Service using the ATW1ATATT Inbound Web Service.
W1- ItemServicePoint	Used to update, read, or delete ItemServicePoint in the WAM application.
	This component calls the W1-ItemServicePoint business Service using the ATW1ItemServicePoint Inbound Web Service.

Component	Description
W1-CMAssetInformation	Used to search asset details through Asset information in the WAM application.
	This component calls the CM-ASSETQ1 business process using Inbound Web Service.
W1-CMAssetIdentifier	Used to search asset details using asset identifier in the WAM application.
	This component calls the CM-ASSETQ2 business Service using Inbound Web Service.
W1-CMAssetDisposition	Used to search asset using asset disposition details in the WAM application.
	This component calls the CM-ASSETQ3 business service using Inbound Web Service.
W1-CMAssetSpecification	Used to search asset using asset specification details in the WAM application.
	This component calls the CM-ASSETQ4 business service using Inbound Web Service.
W1-CMEmployeeInformation	Used to search asset using employee information details in the WAM application.
	This component calls the CM-ASSETQ5 business service using Inbound Web Service.
W1-CMInstallDate	Used to search asset using install date details in the WAM application.
	This component calls the CM-ASSETQ6 business service using Inbound Web Service.
W1- CMAssetMaintenanceSpecification	Used to search asset using asset maintenance specification details in the WAM application.
	This component calls the CM-ASSETQ7 business service using Inbound web service.
W1-CMAssetAttribute	Used to search asset using asset attributes details in the WAM application.
	This component calls the CM-ASSETQ8 business service using Inbound web service.
W1- CMAssetLocationByAssetLocation Information	Used to search asset location details using asset location Information in the WAM application.
	This component calls the CM-ASLOQ1 business Service using Inbound Web Service.

Component	Description
W1-AssetComponentHistory	Used to fetch asset component history using system information in the WAM application.
	This component calls the CM-ASTCMPHST business service using Inbound web service.
W1- CMAssetLocationByContactName	Used to search asset location using contact information in the WAM application.
	This component calls the CM-ASLOQ3 business service using Inbound web service.
W1-CMAssetLocationByLatitudeand Longitude	Used to search asset location using latitude and longitude information in the WAM application.
	This component calls the CM-ASLOQ5 business service using Inbound web service.
W1-CMAssetLocationBySystem	Used to search asset location details using system information in the WAM application.
	This component calls the CM-ASLOQ6 business service using Inbound web service.
W1- GeneralProcess	Used to update, read, or delete GeneralProcess in the WAM application.
	This component calls the W1-GeneralProcess business Service using the ATW1GeneralProcess Inbound Web Service.
W1-RetAstCostCatSum	Used to fetch Asset Cost category information like maintenance amount, operational amount, etc using Asset ID.
	This component calls the W1-RetAsCstCatSum business Service using the ATW1RetAsCstCatSum Inbound Web Service.
W1-RetAstCostCatSum	Used to fetch Asset Cost category information, such as maintenance amount, operational amount, etc using Asset ID.
	This component calls the W1-RetAsCstCatSum business Service using the ATW1RetAsCstCatSum Inbound Web Service.

Component	Description
W1-ApprovalRequest	Used to create, update, read, or delete ApprovalRequest in the WAM application.
	This component calls the W1-ApprovalRequest business object using the Inbound Web Service.
W1-CreLocationDocumentCmpEvt	Used to create, update, read, or delete CreLocationDocumentCmpEvt in the WAM application.
	This component calls the W1- CreLocationDocumentCmpEvt business object using the Inbound Web Service.
W1-DocAttachment	Used to create, update, read, or delete DocAttachment in the WAM application.
	This component calls the W1-DocAttachment business object using the Inbound Web Service.
W1-CreDocumentPayCmpEvt	Used to create, update, read, or delete CreDocumentPayCmpEvt in the WAM application
	This component calls the W1- CreDocumentPayCmpEvt business object using the Inbound Web Service
W1-DocUrl	Used to create, update, read, or delete DocUrl in the WAM application.
	This component calls the W1-DocUrl business object using the Inbound Web Service.
W1-FinancialTransaction	Used to create, update, read, or delete FinancialTransaction in the WAM application.
	This component calls the W1-FinancialTransaction business object using the Inbound Web Service.
W1-StandardNote	Used to create, update, read, or delete StandardNot in the WAM application.
	This component calls the W1-StandardNote business object using the Inbound Web Service.
W1-ARSQL	Used to read an Approval Request ID using an External ID.
	This component calls the CM-ARSQL business service using the ATW1ARSQL Inbound Web Service.

General

Component	Description
W1-FTSQL	Used to read an FT ID using TimeSheet Detail ID.
	This component calls the CM-FTSQL business service using the ATW1FTSQL Inbound Web Service.
W1-Fact	Used to create, update, read, or delete a fact in the WAM application.
	This component calls the W1-Fact business object using the ATW1FACT Inbound Web Service.
W1- OnlineLoaderReq	Used to create, update, read, or delete OnlineLoaderReq in the WAM application.
	This component calls the W1- OnlineLoaderReq business object using the ATWLOnlineLoaderReq Inbound Web Service.
W1- OnlineLoaderRequestType	Used to create, update, read, or delete OnlineLoaderRequestType in the WAM application
	This component calls the W1- OnlineLoaderRequestType business object using th ATW1OnlineLoaderRequesrType Inbound Web Service.
W1-GenericAttachmentLite	Used to create, update, read, or delete GenericAttachmentLite in the WAM application.
	This component calls the W1- GenericAttachmentLite business object using the ATW1 GenericAttachmentLite Inbound Web Service.
W1-Adjustment	Used to create, update, read, or delete Adjustment in the WAM application.
	This component calls the W1-Adjustment business object using the ATW1Adjustment Inbound Web Service.
W1-RETCEVT	Used to retrieve completion events for a measurement in the WAM application.
	This component calls the W1-RETCEVT business service using the ATW1RETCEVT Inbound Web service.
W1-CMRETREFATT	Used to retrieve all the referenced attachments of an Object.
	This component calls the W1-RETREFATT business service using the ATW1RETREFATT Inbound Web Service.

Component	Description
W1-CMDeleteMODocument	Used to delete document entry on a Maintenance Object.
	This component calls the W1-DeleteMODocument business service using the ATW1DeleteMODocument Inbound Web Service.
W1-CMAddMODocument	Used to add document entry to a maintenance object.
	This component calls W1-AddMODocument business service using the ATW1AddMODocument Inbound Web service.
W1-AttachmentUrl	Used to create, update, read, or delete AttachmentUrl in the WAM application.
	This component calls the W1-AttachmentUrl business object using the ATW1AttachmentUrl Web Service.

Inventory Management

Component	Description
W1-AcceptLineMaterial	Used to create, update, read, or delete AcceptLineMaterial in the WAM application.
	This component calls the W1-AcceptLineMaterial business object using the Inbound Web Service.
W1-PhysicalInvCountMaster	Used to create, update, read, or delete PhysicalInvCountMaster in the WAM application.
	This component calls the W1- PhysicalInvCountMaster business object using the Inbound Web Service.
W1-InventoryAdjustmentILM	Used to create, update, read, or delete Inventory Adjustment Lot Management in the WAM application.
	This component calls the W1- InventoryAdjustmentILM business object using the Inbound Web Service.
W1-MaterialReturnLine	Used to create, update, read, or delete MaterialReturnLine in the WAM application.
	This component calls the W1-MaterialReturnLine business object using the Inbound Web Service.

Component	Description
W1-IsSPAStLn	Used to execute IsSPAStLn in the WAM application
	This component calls the W1-IsSPAStLnservice script using the Inbound Web Service.
W1-GenericDataLoaderSync	Used to create, update, read, or delete GenericDataLoaderSync in the WAM application.
	This component calls the W1- GenericDataLoaderSync business object using the Inbound Web Service.
W1-CMUpdCntLin	Used to execute CMUpdCntLin in the WAM application.
	This component calls the W1-CMUpdCntLin service script using the Inbound Web Service.
W1-CMRETCNTLIN	Used to read CMRETCNTLIN in the WAM application.
	This component calls the W1-CMRETCNTLIN business service using the Inbound Web Service.
W1-AddSPAIsLn	Used to execute AddSPAIsLn in the WAM application.
	This component calls the W1-AddSPAIsLn service script using the Inbound Web Service.
W1-AcceptlineSQL	Used to create, update, read, or delete AcceptlineSQL in the WAM application.
	This component calls the W1-AcceptlineSQL business object using the Inbound Web Service.
W1-AcceptLineCraft	Used to create, update, read, or delete AcceptLineCraft in the WAM application.
	This component calls the W1-AcceptLineCraft business object using the Inbound Web Service.
W1-StockTransaction	Used to create, update, read, or delete StockTransaction in the WAM application.
	This component calls the W1-StockTransaction business object using the Inbound Web Service.
W1-BOMGenStockItem	Used to create, update, read, or delete BOMGenStockItem in the WAM application.
	This component calls the W1-BOMGenStockItem business object using the Inbound Web Service.

Component	Description
W1-IndependentPartBOM	Used to create, update, read, or delete IndependentPartBOM in the WAM application.
	This component calls the W1-IndependentPartBOM business object using the Inbound Web Service.
W1-BOMGENSISQL	Used to read a BOM Part ID using Resource Type ID.
	This component calls the CM-BOMGENSI business service using the ATW1BOMGENSISQL Inbound Web Service.
W1-ReorderReviewSQL	Used to read/retrieve the ReviewReorder ID using Stock Item Detail ID.
	This component calls the CM- RRSQL business service using the ATW1RRSQL Inbound Web Service.
W1-InvAdjustInvTracked	Used to create, update, read, or delete InvAdjustInvTracked in the WAM application.
	This component calls the W1-InvAdjustInvTracked business object using the Inbound Web Service.
W1-InvAdjLotManaged	Used to create, update, read, or delete InvAdjLotManaged in the WAM application.
	This component calls the W1-InvAdjLotManaged business object using the Inbound Web Service.
W1-InvAdjRegularInventory	Used to create, update, read, or delete InvAdjRegularInventory in the WAM application.
	This component calls the W1- InvAdjRegularInventory business object using the Inbound Web Service.
W1-MaterialRequestHeader	Used to create, update, read, or delete MaterialRequestHeader in the WAM application.
	This component calls the W1- MaterialRequestHeader business object using the Inbound Web Service.
W1-MaterialRequestLine	Used to create, update, read, or delete MaterialRequestLine in the WAM application.
	This component calls the W1-MaterialRequestLine business object using the Inbound Web Service.

Component	Description
W1-MaterialRequestTemplate	Used to create, update, read, or delete MaterialRequestTemplate in the WAM application.
	This component calls the W1- MaterialRequestTemplate business object using the Inbound Web Service.
W1-MaterialReturnHeader	Used to create, update, read, or delete MaterialReturnHeader in the WAM application.
	This component calls the W1-MaterialReturnHeader business object using the Inbound Web Service.
W1-PhysicalInventoryCountLine	Used to create, update, read, or delete PhysicalInventoryCountLine in the WAM application.
	This component calls the W1- PhysicalInventoryCountLine business object using the Inbound Web Service.
W1-PhysicalInventoryCountMaster	Used to create, update, read, or delete PhysicalInventoryCountMaster in the WAM application.
	This component calls the W1- PhysicalInventoryCountMaster business object using the Inbound Web Service.
W1-PhysicalInventoryHeader	Used to create, update, read, or delete PhysicalInventoryHeader in the WAM application.
	This component calls the W1- PhysicalInventoryHeader business object using the Inbound Web Service.
W1-ReceiptHeader	Used to create, update, read, or delete ReceiptHeader in the WAM application.
	This component calls the W1-ReceiptHeader business object using the Inbound Web Service.
W1-ReceiptLine	Used to create, update, read, or delete ReceiptLine in the WAM application.
	This component calls the W1-ReceiptLine business object using the Inbound Web Service.
W1-ReceiptLineCraft	Used to create, update, read, or delete ReceiptLineCraft in the WAM application.
	This component calls the W1-ReceiptLineCraft business object using the Inbound Web Service.

Component	Description
W1-ReorderReview	Used to create, update, read, or delete ReorderReview in the WAM application.
	This component calls the W1-ReorderReview business object using the Inbound Web Service.
W1-ReturnLine	Used to create, update, read, or delete ReturnLine in the WAM application.
	This component calls the W1-ReturnLine business object using the Inbound Web Service.
W1-SIDDirectPurchase	Used to create, update, read, or delete SIDDirectPurchase in the WAM application.
	This component calls the W1-SIDDirectPurchase business object using the Inbound Web Service.
W1-SIDSpecifiDirectPurchase	Used to create, update, read, or delete SIDSpecifiDirectPurchase in the WAM application
	This component calls the W1- SIDSpecifiDirectPurchase business object using the Inbound Web Service
W1-SIDExpensedAtReceipt	Used to create, update, read, or delete SIDExpensedAtReceipt in the WAM application.
	This component calls the W1- SIDExpensedAtReceipt business object using the Inbound Web Service.
W1-SIDInventory	Used to create, update, read, or delete SIDInventor in the WAM application.
	This component calls the W1-SIDInventory business object using the Inbound Web Service.
W1-SIDSpecificLot	Used to create, update, read, or delete SIDSpecificLot in the WAM application.
	This component calls the W1-SIDSpecificLot business object using the Inbound Web Service.
W1-StockItem	Used to create, update, read, or delete StockItem in the WAM application.
	This component calls the W1-StockItem business object using the Inbound Web Service.
W1-StockTransferHeader	Used to create, update, read, or delete StockTransferHeader in the WAM application.
	This component calls the W1-StockTransferHeader business object using the Inbound Web Service.

Component	Description
W1-StockTransferIssueLine	Used to create, update, read, or delete StockTransferIssueLine in the WAM application.
	This component calls the W1- StockTransferIssueLine business object using the Inbound Web Service.
W1-StockTransferReceiptHeader	Used to create, update, read, or delete StockTransferReceiptHeader in the WAM application.
	This component calls the W1- StockTransferReceiptHeader business object using the Inbound Web Service.
W1-StockTransferReceiptLine	Used to create, update, read, or delete StockTransferReceiptLine in the WAM application.
	This component calls the W1- StockTransferReceiptLine business object using the Inbound Web Service.
W1-StockTransferRequestLine	Used to create, update, read, or delete StockTransferRequestLine in the WAM application
	This component calls the W1- StockTransferRequestLine business object using the Inbound Web Service.
W1-AcceptLineSQL	Used to read Acceptline from the receipt line.
	This component calls the ACPT_LINE_ID busines service using the (ATW1AcceptLineSQL) Inbound Web Service.
W1-TransferShippingMemo	Used to create, update, read, or delete TransferShippingMemo in the WAM application.
	This component calls the W1- TransferShippingMemo business object using the Inbound Web Service.
W1-TrackedStockShippingLine	Used to create, update, read, or delete TrackedStockShippingLine in the WAM application
	This component calls the W1- TrackedStockShippingLine Business object using th Inbound Web Service.
W1-StockShippingLine	Used to create, update, read, or delete StockShippingLine in the WAM application.
	This component calls the W1-StockShippingLine Business object using the Inbound Web Service.

Component	Description
W1-TransferShippingMemo	Used to create, update, read, or delete TransferShippingMemo in the WAM application.
	This component calls the W1- TransferShippingMemo business object using the Inbound Web Service.
W1-ReturnShippingMemo	Used to create, update, read, or delete ReturnShippingMemoin in the WAM application.
	This component calls the W1-ReturnShippingMemo business object using the Inbound Web Service.
W1- RepairShippingMemo	Used to create, update, read, or delete RepairShippingMemo the WAM application.
	This component calls the W1-ReturnShippingMemo Business object using the Inbound Web Service.
W1-LotStockShippingLine	Used to create, update, read, or delete LotStockShippingLine the WAM application.
	This component calls the W1-LotStockShippingLine Business object using the Inbound Web Service.
W1- MaterialIssueLine	Used to create, update, read, or delete MaterialIssueLine in the WAM application.
	This component calls the W1- MaterialIssueLine Business object using the Inbound Web Service.
W1- GeneralShippingMemo	Used to create, update, read, or delete GeneralShippingMemo in the WAM application.
	This component calls the W1- GeneralShippingMemo Business object using the Inbound Web Service.
W1- ShipmentDeficiencyType	Used to create, update, read, or delete ShipmentDeficiencyType in the WAM application.
	This component calls the W1- ShipmentDeficiencyType Business object using the Inbound Web Service.
W1-CMStockItemInformation	Used to search stock item information with all search parameters like Stock Item search screen in WAM application.
	This component calls the CM-STKITMQ1 business service using the Inbound Web Service.

Component	Description
W1-CMStockItemIdentifier	Used to search stock item information based on stock item identifier like Stock identifier search screen in WAM application.
	This component calls the CM-STKITMQ2 business service using the Inbound Web Service.
W1- CMStockItemDetailByStockItem DetailInfo	Used to search stock item details using various parameters like WAM application.
	This component calls the CM-SIDQ1 business service using the Inbound Web Service.
W1- CMStockItemDetailByStockItem DetailID	Used to search stock item details using various parameters like WAM application.
	This component calls the CM-SIDQ2 business service using the Inbound Web Service.
W1- CMStockItemDetailByStockItemInfo	Used to search stock item details using various parameters like WAM application.
	This component calls the CM-SIDSTRQRY business service using the Inbound Web Service.
W1- CMRETPOLINEID	Used to retrieve PO Line ID using PO Header ID and PO Line Business Object.
	This component calls the CM-RETPOLINE business service using the Inbound Web Service.
W1-CMRETPRLINEID	Used to retrieve PR Line ID using PR Header ID and PR Line Business Object.
	This component calls the CM-RETPRLINE business service using the Inbound Web Service.
W1-CMMaterialRequestHeader Information	Used to search Material request header information.
momilation	This component calls the CM-MTRQHDQ1 business service using the Inbound Web Service.
W1-CMMaterialRequestHeaderID	Used to search Material request header ID.
	This component calls the CM-MTRQHDQ2 business service using the Inbound Web Service.
W1-CMShippingMemoByShipping MemoInfo	Used to search Shipping Memo Information.
Hemonino	This component calls the CM-SHPMMQ1 business service using the Inbound Web Service.
W1-CMShippingMemoByShipping MemoID	Used to search Shipping Memo ID.
MemolD	This component calls the CM-SHPMMQ2 business service using the Inbound Web Service.

Component	Description
W1-CMRecvAllnPartial	Used to receive all or partial stock items.
	This component calls the CM-RcvAllPar script using the Inbound Web Service.

Purchasing

Component	Description
W1-BCAccessList	Used to create, update, read, or delete BCAccessList in the WAM application.
	This component calls the W1-BCAccessList business object using the Inbound Web Service.
W1-BCCraftLine	Used to create, update, read, or delete BCCraftLine in the WAM application.
	This component calls the W1-BCCraftLine business object using the Inbound Web Service.
W1-CMBCLNS	Used to fetch all blanket contract lines from active blanket contract in the WAM application.
	This component calls W1-CMBCLNS business service using the Inbound Web Service.
W1-CrePOFrBC	Used to create purchase order from blanket contract in the WAM application.
	This component calls W1CrePOFrBC service script using the Inbound Web Service.
W1-CrePORev	Used to create new revision for purchase order in the WAM application.
	This component calls W1CrePORev service script using the Inbound Web Service.
W1-InvoiceGroup	Used to create, update, read, or delete InvoiceGroup in the WAM application.
	This component calls the W1-InvoiceGroup business object using the Inbound Web Service.
W1-CMCrtPORev	Used to execute CMCrtPORev in the WAM application.
	This component calls the W1-CMCrtPORevservice script using the Inbound Web Service.

Component	Description
W1-BCLineIntegration	Used to create, update, read, or delete BCLineIntegration in the WAM application.
	This component calls the W1-BCLineIntegration business object using the Inbound Web Service.
W1-BCEquipmentLine	Used to create, update, read, or delete BCEquipmentLine in the WAM application.
	This component calls the W1-BCEquipmentLine business object using the Inbound Web Service.
W1-BCHeader	Used to create, update, read, or delete BCHeader in the WAM application.
	This component calls the W1-BCHeader business object using the Inbound Web Service.
W1-BCHeaderIntegration	Used to create, update, read, or delete BCHeaderIntegration in the WAM application.
	This component calls the W1-BCHeaderIntegration business object using the Inbound Web Service.
W1-BCOtherLine	Used to create, update, read, or delete BCOtherLine in the WAM application.
	This component calls the W1-BCOtherLine business object using the Inbound Web Service.
W1-BCStockItemLine	Used to create, update, read, or delete BCStockItemLine in the WAM application.
	This component calls the W1-BCStockItemLine business object using the Inbound Web Service.
W1-CraftPOLine	Used to create, update, read, or delete CraftPOLine in the WAM application.
	This component calls the W1-CraftPOLine business object using the Inbound Web Service.
W1-EquipmentPOLine	Used to create, update, read, or delete EquipmentPOLine in the WAM application.
	This component calls the W1-EquipmentPOLine business object using the Inbound Web Service.
W1-EquipmentPRLine	Used to create, update, read, or delete EquipmentPRLine in the WAM application.
	This component calls the W1-EquipmentPRLine business object using the Inbound Web Service.

Component	Description
W1-Expedite	Used to create, update, read, or delete Expedite in the WAM application.
	This component calls the W1-Expedite business object using the Inbound Web Service.
W1-OtherResourcePOLine	Used to create, update, read, or delete OtherResourcePOLine in the WAM application.
	This component calls the W1- OtherResourcePOLine business object using the Inbound Web Service.
W1-POLineIntegration	Used to create, update, read, or delete POLineIntegration in the WAM application.
	This component calls the W1-POLineIntegration business object using the Inbound Web Service.
W1-POHeaderIntegration	Used to create, update, read, or delete POHeaderIntegration in the WAM application.
	This component calls the W1-POHeaderIntegration business object using the Inbound Web Service.
W1-PRCreBC	Used to create, update, read, or delete PRCreBC in the WAM application.
	This component calls the W1-PRCreBC business object using the Inbound Web Service.
W1-PRCrLine	Used to create, update, read, or delete PRCrLine in the WAM application.
	This component calls the W1-PRCrLine business object using the Inbound Web Service.
W1-PREqLine	Used to create, update, read, or delete PREqLine ir the WAM application.
	This component calls the W1- PREqLine business object using the Inbound Web Service.
W1-PRHeader	Used to create, update, read, or delete PRHeader in the WAM application.
	This component calls the W1-PRHeader business object using the Inbound Web Service.
W1-PRORLine	Used to create, update, read, or delete PRORLine in the WAM application.
	This component calls the W1-PRORLine business object using the Inbound Web Service.

Component	Description
W1-PRSILine	Used to create, update, read, or delete PRSILine in the WAM application.
	This component calls the W1-PRSILine business object using the Inbound Web Service.
W1-PurchaseOrderHeader	Used to create, update, read, or delete PurchaseOrderHeader in the WAM application.
	This component calls the W1-PurchaseOrderHeade business object using the Inbound Web Service.
W1-StockItemPOLine	Used to create, update, read, or delete StockItemPOLine in the WAM application.
	This component calls the W1-StockItemPOLine business object using the Inbound Web Service.
W1-Vendor	Used to create, update, read, or delete Vendor in th WAM application.
	This component calls the W1-Vendor business object using the Inbound Web Service.
W1-VendorLocation	Used to create, update, read, or delete VendorLocation in the WAM application.
	This component calls the W1-VendorLocation business object using the Inbound Web Service.
W1-CMPOHSQL	Used to read a Purchase Order ID using an Externa ID.
	This component calls the CM-POHSQL business service using the ATW1CMPOHSQL Inbound We Service.
W1-CMBlanketContractByBlanket ContractHeaderInfo	Used to search Blanket contract by Blanket Contrac Header Information.
	This component calls the CM-BCHDQ1 business service using Inbound Web Service.
W1-CMBlanketContractByBlanket ContractHeaderID	Used to search Blanket contract by Blanket Contrac Header ID.
	This component calls the CM-BCHDQ2 business service using Inbound Web Service.
W1-CMBlanketContractByBlanket ContractHeaderResourceType	Used to search Blanket contract by Blanket Contrac Resource type details.
	This component calls the CM-BCHDQ3 business service using Inbound Web Service.

Component	Description
W1-CMPOByHeaderInfo	Used to search purchase order by header information.
	This component calls the CM-POQ1 business service using Inbound Web Service.
W1-CMPOByLineInfo	Used to search purchase order by line information.
	This component calls the CM-POQ2 business service using Inbound Web Service.
W1-CMPOByHeaderId	Used to search purchase order information using header ID.
	This component calls the CM-POQ3 business service using Inbound Web Service.
W1-CMPOByWorkOrder	Used to search purchase order by work order details.
	This component calls the CM-POQ4 business service using Inbound Web Service.
W1-PRPOHSQL	Used to fetch PO details for a specific PR.
	This component calls the CM-PRPOHSQL business service using Inbound Web Service.
W1-CMPRByHeaderInfo	Used to search purchase request by header information.
	This component calls the CM-PRHQ1 business service using Inbound Web Service.
W1-CMPRByLineInfo	Used to search purchase request by line information.
	This component calls the CM-PRHQ2 business service using Inbound Web Service.
W1-CMPRById	Used to search purchase request using identifiers.
	This component calls the CM-PRHQ3 business service using Inbound Web Service.
W1-CMPRByWOInfo	Used to search purchase request by work order information.
	This component calls the CM-PRHQ4 business service using Inbound Web Service.

Component	Description
W1-ActivityComplInboundComm	Used to create, update, read, or delete ActivityComplInboundComm in the WAM application.
	This component calls the W1- ActivityComplInboundComm business object using the Inbound Web Service.
W1-ServiceHistoryParticipant	Used to create, update, read, or delete ServiceHistoryParticipant in the WAM application.
	This component calls the W1- ServiceHistoryParticipant business object using the Inbound Web Service.
W1-ShiftHours	Used to read ShiftHours in the WAM application.
	This component calls the W1-ShiftHours business service using the Inbound Web Service.
W1-RCMSchedule	Used to create, update, read, or delete RCMSchedule in the WAM application.
	This component calls the W1-RCMSchedule business object using the Inbound Web Service.
W1-PtNotes	Used to create, update, read, or delete PtNotes in the WAM application.
	This component calls the W1-PtNotes business object using the Inbound Web Service.
W1-ProjectMgmntIntegMstConfig	Used to create, update, read, or delete ProjectMgmntIntegMstConfig in the WAM application.
	This component calls the W1- ProjectMgmntIntegMstConfig business object using the Inbound Web Service.
W1-PmtNotes	Used to create, update, read, or delete PmtNotes in the WAM application.
	This component calls the W1-PmtNotes business object using the Inbound Web Service.
W1-PermitChecklist	Used to create, update, read, or delete PermitChecklist in the WAM application.
	This component calls the W1-PermitChecklist business object using the Inbound Web Service.

Work Management

Component	Description
W1-PRJWD	Used to read PRJWD in the WAM application.
	This component calls the W1-PRJWDbusiness service using the Inbound Web Service.
W1-PRJTMST	Used to read PRJTMST in the WAM application.
	This component calls the W1-PRJTMSTbusiness service using the Inbound Web Service.
W1-PRJPOLINE	Used to read PRJPOLINE in the WAM application
	This component calls the W1-PRJPOLINEbusiness service using the Inbound Web Service.
W1-PIHeader	Used to create, update, read, or delete PIHeader in the WAM application.
	This component calls the W1-PIHeader business object using the Inbound Web Service.
W1-InternalPermit	Used to create, update, read, or delete InternalPermi in the WAM application.
	This component calls the W1-InternalPermit business object using the Inbound Web Service.
W1-FollowUpSkippedAssetsCmpEvt	Used to create, update, read, or delete FollowUpSkippedAssetsCmpEvt in the WAM application.
	This component calls the W1- FollowUpSkippedAssetsCmpEvt business object using the Inbound Web Service.
W1-ExternalPermit	Used to create, update, read, or delete ExternalPermit in the WAM application.
	This component calls the W1-ExternalPermit business object using the Inbound Web Service.
W1-EventTrigger	Used to create, update, read, or delete EventTrigger in the WAM application.
	This component calls the W1-EventTrigger business object using the Inbound Web Service.
W1-OperationMaintSpec	Used to create, update, read, or delete OperationMaintSpec in the WAM application.
	This component calls the W1-OperationMaintSpec business object using the Inbound Web Service.

Component	Description
W1-MobileStoreroomInventory	Used to create, update, read, or delete MobileStoreroomInventory in the WAM application
	This component calls the W1- MobileStoreroomInventory business object using the Inbound Web Service.
W1-MassUpd	Used to createMassUpd in the WAM application.
	This component calls the W1-MassUpd service script using the Inbound Web Service.
W1-InternalPermit	Used to create, update, read, or delete InternalPermit in the WAM application.
	This component calls the W1-InternalPermit business object using the Inbound Web Service.
W1-EventSchedule	Used to create, update, read, or delete EventSchedule in the WAM application.
	This component calls the W1-EventSchedule business object using the Inbound Web Service.
W1-DowntimeFailureRuntimCmpEvt	Used to create, update, read, or delete DowntimeFailureRuntimCmpEvt in the WAM application.
	This component calls the W1- DowntimeFailureRuntimCmpEvt business object using the Inbound Web Service.
W1-ActivityEquipRequirement	Used to create, update, read, or delete ActivityEquipRequirement in the WAM application.
	This component calls the W1- ActivityEquipRequirement business object using the Inbound Web Service.
W1-TrnAssetRcdMsrmtCmplEvt	Used to create, update, read, or delete TrnAssetRcdMsrmtCmplEvt in the WAM application.
	This component calls the W1- TrnAssetRcdMsrmtCmplEvt business object using the Inbound Web Service.
W1-ActivityLaborRequirement	Used to create, update, read, or delete ActivityLaborRequirement in the WAM application.
	This component calls the W1- ActivityLaborRequirement business object using the Inbound Web Service.

Component	Description
W1- SynchronizeMobileStoreroomDetails	Used to create, update, read, or delete SynchronizeMobileStoreroomDetails in the WAM application.
	This component calls the W1- SynchronizeMobileStoreroomDetails business object using the Inbound Web Service.
W1-DetermineMaintTrigger	Used to read DetermineMaintTrigger in the WAM application.
	This component calls the W1- DetermineMaintTrigger business object using the Inbound Web Service.
W1-CreSvcHstDocumentCmpEvt	Used to create, update, read, or delete CreSvcHstDocumentCmpEvt in the WAM application.
	This component calls the W1- CreSvcHstDocumentCmpEvt business object using the Inbound Web Service.
W1-CMWorkReqInformation	Used to read CMWorkReqInformation in the WAM application.
	This component calls the W1- CMWorkReqInformation business service using the Inbound Web Service.
W1-CMWorkReqIdentifier	Used to read CMWorkReqIdentifier in the WAM application.
	This component calls the W1-CMWorkReqIdentifier business service using the Inbound Web Service.
W1-CMWorkActivityInformation	Used to read CMWorkActivityInformation in the WAM application.
	This component calls the W1- CMWorkActivityInformation business object using the Inbound Web Service.
W1-CMWRWORKDUP	Used to read CMWRWORKDUP in the WAM application.
	This component calls the W1-CMWRWORKDUP business service using the Inbound Web Service.
W1-CMWOWASHSQL	Used to read CMWOWASHSQL in the WAM application.
	This component calls the W1-CMWOWASHSQL business service using the Inbound Web Service.

Component	Description
W1-CMWOWASCSQL	Used to read CMWOWASCSQL in the WAM application.
	This component calls the W1-CMWOWASCSQL business service using the Inbound Web Service.
W1-CMWOWAPMSQL	Used to read CMWOWAPMSQL in the WAM application.
	This component calls the W1-CMWOWAPMSQL business service using the Inbound Web Service.
W1-CMWOByInformation	Used to read CMWOByInformation in the WAM application.
	This component calls the W1- CMWOByInformation business service using the Inbound Web Service.
W1-CMWOBYID	Used to read CMWOBYID in the WAM application
	This component calls the W1-CMWOBYID business service using the Inbound Web Service.
W1-CMServiceCallInformation	Used to read CMServiceCallInformation in the WAM application.
	This component calls the W1- CMServiceCallInformation business service using the Inbound Web Service.
W1-CMServiceCallIdentifier	Used to read CMServiceCallIdentifier in the WAM application.
	This component calls the W1- CMServiceCallIdentifier business service using the Inbound Web Service.
W1-CMPRJWO	Used to read CMPRJWO in the WAM application.
	This component calls the W1-CMPRJWO business service using the Inbound Web Service.
W1-CMPRJWACT	Used to read CMPRJWACT in the WAM application.
	This component calls the W1-CMPRJWACT business service using the Inbound Web Service.
W1-CMLnkPmCkls	Used to execute CMLnkPmCkls in the WAM application.
	This component calls the W1-CMLnkPmCklsservice script using the Inbound Web Service.

Component	Description
W1-CMActivityWorkWindow	Used to read CMActivityWorkWindow in the WAM application.
	This component calls the W1- CMActivityWorkWindow business service using the Inbound Web Service.
W1-CMActivityLocation	Used to read CMActivityLocation in the WAM application.
	This component calls the W1-CMActivityLocation business service using the Inbound Web Service.
W1-CMActivityIdentifier	Used to read CMActivityIdentifier in the WAM application.
	This component calls the W1-CMActivityIdentifier business service using the Inbound Web Service.
W1-CMAcNoteMnt	Used to execute CMAcNoteMnt in the WAM application.
	This component calls the W1-CMAcNoteMnt service script using the Inbound Web Service.
W1-ActivityNotes	Used to update, read, or delete ActivityNotes in the WAM application.
	This component calls the W1-ActivityNotes business object using the Inbound Web Service.
W1-ActivityMaterialUsage	Used to execute ActivityMaterialUsage in the WAM application.
	This component calls the W1-ActivityMaterialUsage service script using the Inbound Web Service.
W1-ActAstLst	Used to execute ActAstLst in the WAM application
	This component calls the W1-ActAstLst service script using the Inbound Web Service.
W1-ACfgDeviceUpgrade	Used to create, update, read, or delete ACfgDeviceUpgrade in the WAM application.
	This component calls the W1-ACfgDeviceUpgrade business object using the Inbound Web Service.
W1-ActivityMaterialRequirement	Used to create, update, read, or delete ActivityMaterialRequirement in the WAM application.
	This component calls the W1- ActivityMaterialRequirement business object using the Inbound Web Service.

Component	Description
W1-ACCfgDeviceUpgrade	Used to create, update, read, or delete ACCfgDeviceUpgrade in the WAM application.
	This component calls the W1-ACCfgDeviceUpgrade business object using the Inbound Web Service.
W1-ACACfgDeviceUpgrade	Used to create, update, read, or delete ACACfgDeviceUpgrade in the WAM application.
	This component calls the W1- ACACfgDeviceUpgrade business object using the Inbound Web Service.
W1-ACACCfgDeviceUpgrade	Used to create, update, read, or delete ACACCfgDeviceUpgrade in the WAM application.
	This component calls the W1- ACACCfgDeviceUpgrade business object using the Inbound Web Service.
W1-AACfgDeviceUpgrade	Used to create, update, read, or delete AACfgDeviceUpgrade in the WAM application.
	This component calls the W1-AACfgDeviceUpgrad business object using the Inbound Web Service.
W1-AACCfgDeviceUpgrade	Used to create, update, read, or delete AACCfgDeviceUpgrade in the WAM application.
	This component calls the W1- AACCfgDeviceUpgrade business object using the Inbound Web Service.
W1-ActivityOtherRequirement	Used to create, update, read, or delete ActivityOtherRequirement in the WAM application
	This component calls the W1- ActivityOtherRequirement business object using the Inbound Web Service.
W1-AdHocActivityCore	Used to create, update, read, or delete AdHocActivityCore in the WAM application.
	This component calls the W1-AdHocActivityCore business object using the Inbound Web Service.
W1- AssetLocationSpecificTempl	Used to create, update, read, or delete AssetLocationSpecificTempl in the WAM application.
	This component calls the W1- AssetLocationSpecificTempl business object using the Inbound Web Service.

Component	Description
W1-AssetLocSpecTemplWorkOrder	Used to create, update, read, or delete AssetLocSpecTemplWorkOrder in the WAM application.
	This component calls the W1- AssetLocSpecTemplWorkOrder business object using the Inbound Web Service.
W1-AssetLocSpecTemplateAct	Used to create, update, read, or delete AssetLocSpecTemplateAct in the WAM application.
	This component calls the W1- AssetLocSpecTemplateAct business object using the Inbound Web Service.
W1-AssetReplicationActivity	Used to create, update, read, or delete AssetReplicationActivity in the WAM application.
	This component calls the W1- AssetReplicationActivity business object using the Inbound Web Service.
W1-AssetReplicationComplEvent	Used to create, update, read, or delete AssetReplicationComplEvent in the WAM application.
	This component calls the W1- AssetReplicationComplEvent business object using the Inbound Web Service.
W1-CreAssetAttachCmpEvt	Used to create, update, read, or delete CreAssetAttachCmpEvt in the WAM application.
	This component calls the W1- CreAssetAttachCmpEvt business object using the Inbound Web Service.
W1-CreAssetDocumentCmpEvt	Used to create, update, read, or delete CreAssetDocumentCmpEvt in the WAM application.
	This component calls the W1- CreAssetDocumentCmpEvt business object using the Inbound Web Service.
W1-CreAssetPayCmpEvt	Used to create, update, read, or delete CreAssetPayCmpEvt in the WAM application.
	This component calls the W1-CreAssetPayCmpEvt business object using the Inbound Web Service.

Component	Description
W1-CreNodeAttachCmpEvt	Used to create, update, read, or delete CreNodeAttachCmpEvt in the WAM application.
	This component calls the W1- CreNodeAttachCmpEvt business object using the Inbound Web Service.
W1-CreServiceHistoryAttCmpEvt	Used to create, update, read, or delete CreServiceHistoryAttCmpEvt in the WAM application.
	This component calls the W1- CreServiceHistoryAttCmpEvt business object using the Inbound Web Service.
W1-SubscriptionShiftPlanTemp	Used to create, update, read, or delete SubscriptionShiftPlanTemp in the WAM application
	This component calls the W1- SubscriptionShiftPlanTemp business object using the Inbound Web Service.
W1-CommonShiftPlanTemplate	Used to create, update, read, or delete CommonShiftPlanTemplate in the WAM application.
	This component calls the W1- CommonShiftPlanTemplate business object using the Inbound Web Service.
W1-Craft	Used to create, update, read, or delete Craft in the WAM application.
	This component calls the W1-Craft business object using the Inbound Web Service.
W1-CreActivityPayCmpEvt	Used to create, update, read, or delete CreActivityPayCmpEvt in the WAM application.
	This component calls the W1- CreActivityPayCmpEvt business object using the Inbound Web Service.
W1-CreateActivityInboundComm	Used to create, update, read, or delete CreateActivityInboundComm in the WAM application.
	This component calls the W1- CreateActivityInboundComm business object using the Inbound Web Service.

Component	Description
W1-CreComActivityInboundComm	Used to create, update, read, or delete CreComActivityInboundComm in the WAM application.
	This component calls the W1- CreComActivityInboundComm business object using the Inbound Web Service.
W1-CreServiceHistoryPayCmpEvt	Used to create, update, read, or delete CreServiceHistoryPayCmpEvt in the WAM application.
	This component calls the W1- CreServiceHistoryPayCmpEvt business object using the Inbound Web Service.
W1-Crew	Used to create, update, read, or delete Crew in the WAM application.
	This component calls the W1-Crew business object using the Inbound Web Service.
W1-CreWorkReqDocumentCmpEvt	Used to create, update, read, or delete CreWorkReqDocumentCmpEvt in the WAM application.
	This component calls the W1- CreWorkReqDocumentCmpEvt business object using the Inbound Web Service.
W1-CreWorkRequestPayCmpEvt	Used to create, update, read, or delete CreWorkRequestPayCmpEvt in the WAM application.
	This component calls the W1- CreWorkRequestPayCmpEvt business object using the Inbound Web Service.
W1-CrewShiftTemplate	Used to create, update, read, or delete CrewShiftTemplate in the WAM application.
	This component calls the W1-CrewShiftTemplate business object using the Inbound Web Service.
W1-CrewWithCraft	Used to create, update, read, or delete CrewWithCraft in the WAM application.
	This component calls the W1-CrewWithCraft business object using the Inbound Web Service.
W1-CreSvcHistCmpEvt	Used to create, update, read, or delete CreSvcHistCmpEvt in the WAM application.
	This component calls the W1-CreSvcHistCmpEvt business object using the Inbound Web Service.

Component	Description
W1-CreAssetCmpEvt	Used to create, update, read, or delete CreAssetCmpEvt in the WAM application.
	This component calls the W1-CreAssetCmpEvt business object using the Inbound Web Service.
W1-CreActivityCmpEvt	Used to create, update, read, or delete CreActivityCmpEvt in the WAM application.
	This component calls the W1-CreActivityCmpEvt business object using the Inbound Web Service.
W1- CreAssetDocumentCmpEvt	Used to create, update, read, or delete CreAssetDocumentCmpEvt in the WAM application.
	This component calls the W1- CreAssetDocumentCmpEvt business object using the Inbound Web Service.
W1- MeasQuckEntryActivityType	Used to create, update, read, or delete MeasQuckEntryActivityType in the WAM application.
	This component calls the W1- MeasQuckEntryActivityType business object using the Inbound Web Service.
W-RCMCalendarInterval	Used to create, update, read, or delete RCMCalendarInterval in the WAM application.
	This component calls the W1- RCMCalendarInterva business object using the Inbound Web Service.
W1-RCMRuntimeAnniversary	Used to create, update, read, or delete RCMRuntimeAnniversary in the WAM application.
	This component calls the W1- RCMRuntimeAnniversary business object using the Inbound Web Service.
W1-RCMRuntimeInterval	Used to create, update, read, or delete RCMRuntimeIntervalin the WAM application.
	This component calls the W1- RCMRuntimeInterva business object using the Inbound Web Service.
W1-DailySchedule	Used to create, update, read, or delete DailySchedul in the WAM application.
	This component calls the W1-DailySchedule business object using the Inbound Web Service.

Component	Description
W1-Employee	Used to create, update, read, or delete Employee in the WAM application.
	This component calls the W1-Employee business object using the Inbound Web Service.
W1-EquipForTemplateAct	Used to create, update, read, or delete EquipForTemplateAct in the WAM application.
	This component calls the W1-EquipForTemplateAc business object using the Inbound Web Service.
W1-GeneralTemplateActivity	Used to create, update, read, or delete GeneralTemplateActivity in the WAM application.
	This component calls the W1- GeneralTemplateActivity business object using the Inbound Web Service.
W1-GeneralTemplateWorkOrder	Used to create, update, read, or delete GeneralTemplateWorkOrder in the WAM application.
	This component calls the W1- GeneralTemplateWorkOrder business object using the Inbound Web Service.
W1-LaborForTemplateAct	Used to create, update, read, or delete LaborForTemplateAct in the WAM application.
	This component calls the W1-LaborForTemplateAc business object using the Inbound Web Service.
W1-Leave	Used to create, update, read, or delete Leave in the WAM application.
	This component calls the W1-Leave business object using the Inbound Web Service.
W1-LocalActivityCoreWAM	Used to create, update, read, or delete LocalActivityCoreWAM in the WAM application.
	This component calls the W1- LocalActivityCoreWAM business object using the Inbound Web Service.
W1-MaintenanceSchedule	Used to create, update, read, or delete MaintenanceSchedule in the WAM application.
	This component calls the W1-MaintenanceSchedule business object using the Inbound Web Service.
W1-ODCEquipment	Used to create, update, read, or delete ODCEquipment in the WAM application.
	This component calls the W1-ODCEquipment business object using the Inbound Web Service.

Component	Description
W1-OperationalReadingCmpEvt	Used to create, update, read, or delete OperationalReadingCmpEvt in the WAM application.
	This component calls the W1- OperationalReadingCmpEvt business object using the Inbound Web Service.
W1-Other	Used to create, update, read, or delete Other in the WAM application.
	This component calls the W1-Other business objec using the Inbound Web Service.
W1-OtherDirectCharges	Used to create, update, read, or delete OtherDirectCharges in the WAM application.
	This component calls the W1-OtherDirectCharges business object using the Inbound Web Service.
W1-OtherDirectChargesOther	Used to create, update, read, or delete OtherDirectChargesOther in the WAM application
	This component calls the W1- OtherDirectChargesOther business object using the Inbound Web Service.
W1-OtherForTemplateAct	Used to create, update, read, or delete OtherForTemplateAct in the WAM application.
	This component calls the W1-OtherForTemplateAc business object using the Inbound Web Service.
W1-Project	Used to create, update, read, or delete Project in the WAM application.
	This component calls the W1-Project business object using the Inbound Web Service.
W1-RCMCalendarAnniversary	Used to create, update, read, or delete RCMCalendarAnniversary in the WAM application
	This component calls the W1- RCMCalendarAnniversary business object using the Inbound Web Service.
W1-RetrieveComplEvents	Used to retrieve the completion events from an activity.
	This component calls the W1-RETCEVT business service using the Inbound Web Service.
W1-SchedulePlan	Used to create, update, read, or delete SchedulePlar in the WAM application.
	This component calls the W1-SchedulePlan busines object using the Inbound Web Service.

Component	Description
W1-TemplateActivityLaborReq	Used to create, update, read, or delete TemplateActivityLaborReq in the WAM application
	This component calls the W1- TemplateActivityLaborReq business object using the Inbound Web Service.
W1-TempActMaterialReq	Used to create, update, read, or delete TemplateActMaterialReq in the WAM application.
	This component calls the W1-TempActMaterialRec business object using the Inbound Web Service.
W1-Timesheet	Used to create, update, read, or delete Timesheet in the WAM application.
	This component calls the W1-Timesheet business object using the Inbound Web Service.
W1-TimesheetDetail	Used to create, update, read, or delete TimesheetDetail in the WAM application.
	This component calls the W1-TimesheetDetail business object using the Inbound Web Service.
W1-TrnAssetCmpEvent	Used to create, update, read, or delete TrnAssetCmpEvent in the WAM application.
	This component calls the W1-TrnAssetCmpEvent business object using the Inbound Web Service.
W1- UpdAssetPayCmpEvt	Used to create, update, read, or delete UpdAssetPayCmpEvtin the WAM application.
	This component calls the W1- UpdAssetPayCmpEv business object using the Inbound Web Service.
W1- UpdNodePayCmpEvt	Used to create, update, read, or delete UpdNodePayCmpEvtthe WAM application.
	This component calls the W1-UpdNodePayCmpEv business object using the Inbound Web Service.
W1-WorkOrder	Used to create, update, read, or delete WorkOrder in the WAM application.
	This component calls the W1-WorkOrder business object using the Inbound Web Service.
W1-WorkRequest	Used to create, update, read, or delete WorkReques in the WAM application.
	This component calls the W1-WorkRequest busines object using the Inbound Web Service.

Component	Description
W1-WorkRequestComplEvt	Used to create, update, read, or delete WorkRequestComplEvt in the WAM application.
	This component calls the W1- WorkRequestComplEvt business object using the Inbound Web Service.
W1-RetriveAERID	Used to read/retrieve Activity Equipment requirement ID from Act in the WAM application.
	This component calls the ATW1RTAERID busines service using the ATW1RTAERID Inbound Web Service.
W1-RetriveALRID	Used to read/retrieve Activity Labor Requirement ID from Activity in the WAM application.
	This component calls the ATW1RTALRID busines service using the ATW1RTALRID Inbound Web Service.
W1-RetriveAMRID	Used to read/retrieve Activity Material Requirement ID from Activity in the WAM application.
	This component calls the ATW1RTAMRID business service using the ATW1RTAMRID Inbound Web Service.
W1-RetriveAORID	Used to read/retrieve Activity Other Requirement ID from Activity in the WAM application.
	This component calls the ATW1RTAORID busines service using the ATW1RTAORID Inbound Web Service.
W1-ActivityChecklist	Used to create, update, read, or delete ActivityChecklist in the WAM application.
	This component calls the W1-ActivityChecklist business object using ATW1ActivityChecklist Inbound Web Service.
W1-ChecklistType	Used to create, update, read, or delete W1- ChecklistType in the WAM application.
	This component calls the W1-ChecklistType business object using ATW1ChecklistType Inbound Web Service.
W1-WOActivityActiveOutboundMsg	Used to add/update WOActivityActive Outbound message BO in the WAM Application.
	This component calls the W1- WOActivityActiveOutboundMsg business service using the ATW1WOActivityActiveOutboundMsg Inbound WebService.

Component	Description
W1-WOActivityFinalOutboundMsg	Used to cancel/complete WOActivityFinalOutboundMessage BO in the WAM application.
	This component calls the W1- WOActivityFinalOutboundMsg business service using the ATW1WOActivityFinalOutboundMsg Inbound Web Service.
W1-WorkCategory	Used to create, update, read, or delete WorkCategory in the WAM application.
	This component calls the W1-WorkCategory business object using the ATW1WorkCategory Inbound Web Service.
W1-WorkCategoryBundlingAddBO	Used to create, update, read, or delete WorkCategoryBundlingAddBO in the WAM application.
	This component calls the W1- WorkCategoryBundlingAddBO business object using the Inbound Web Service.
W1-WorkCategoryPhysicalBO	Used to create, update, read, or delete WorkCategoryPhysicalBO in the WAM application.
	This component calls the W1- WorkCategoryPhysicalBO business object using the ATW1 WorkCategoryPhysicalBO Inbound Web Service.
W1-WorkClass	Used to create, update, read, or delete WorkClass in the WAM application.
	This component calls the W1-WorkClass business object using the ATW1WorkClass Inbound Web Service.
W1-WorkClassBundlingAddBO	Used to create, update, read, or delete WorkClassBundlingAddBO in the WAM application.
	This component calls the W1- WorkClassBundlingAddBO business object using the ATW1WorkClassBundlingAddBO Inbound Web Service.
W1-WorkClassPhysicalBO	Used to create, update, read, or delete WorkClassPhysicalBO in the WAM application.
	This component calls the W1- WorkClassPhysicalBO business object using ATW1WorkClassPhysicalBO Inbound Web Service.

Component	Description
W1-ActivityGenerator	Used to create, update, read, or delete ActivityGeneratorin the WAM application.
	This component calls the W1- W1- ActivityGenerator business object using ATW1ActivityGenerator Inbound Web Service.
W1-ComplianceCategory	Used to create, update, read, or delete ComplianceCategory in the WAM application.
	This component calls the W1-ComplianceCategory business object using the ATW1ComplianceCategory Inbound Web Service.
W1-ComplianceType	Used to create, update, read, or delete ComplianceType in the WAM application.
	This component calls the W1-ComplianceType business object using ATW1ComplianceType Inbound Web Service.
W1-CrAnyServiceHistoryCmplEvt	Used to create, update, read, or delete W1- CrAnyServiceHistoryCmplEvt the WAM application.
	This component calls the W1- CrAnyServiceHistoryCmplEvt business object using ATW1ActivityGenerator Inbound Web Service.
W1- CorrectiveComplianceType	Used to create, update, read, or delete W1- CorrectiveComplianceType the WAM application.
	This component calls the W1- CorrectiveComplianceType business object using ATW1 CorrectiveComplianceType Inbound Web Service.
W1- ServiceCode	Used to create, update, read, or delete ServiceCode in the WAM application.
	This component calls the W1- ServiceCode business object using ATW1 ServiceCode Inbound Web Service.
W1- ServiceCallCategory	Used to create, update, read, or delete W1- ServiceCallCategory the WAM application.
	This component calls the W1- ServiceCallCategory business object using ATW1 ServiceCallCategory Inbound Web Service.

Component	Description
W1- ServiceCall	Used to create, update, read, or delete W1- ServiceCall the WAM application.
	This component calls the W1-serviceCall business object using ATW1ServiceCall Inbound Web Service.
W1- Communication	Used to create, update, read, or delete W1- Communication the WAM application.
	This component calls the W1-Communication business object using ATW1Communication l Inbound Web Service.
W1-ProjectActOutboundSyncReq	Used to update or read delete W1- ProjectActOutboundSyncReq the WAM application
	This component calls the W1- ProjectActOutboundSyncReq business object using ATW1 ProjectActOutboundSyncReq Inbound Web Service.
W1- ProjectActOutboundMsg	Used to update or read, W1- ProjectActOutboundMsg in the WAM application.
	This component calls the W1- ProjectActOutboundMsg object using ATW1 ProjectActOutboundMsg Inbound Web Service.
W1- ProjectActOutboundMsg	Used to create, update, read, or delete W1- ProjectActOutboundMsg the WAM application.
	This component calls the W1- ProjectActOutboundMsg business object using ATW1 ProjectActOutboundMsg Inbound Web Service.
W1-SOMActivity	Used to create, update, read, or delete W1- SOMActivity the WAM application.
	This component calls the W1-SOMActivity business object using ATW1SOMActivity Inbound Web Service.
W1- ReplaceAssetOutbound	Used to create, update, read, or delete W1- ReplaceAssetOutbound the WAM application.
	This component calls the W1- ReplaceAssetOutbound business object using ATW1ReplaceAssetOutbound Inbound Web Service.

Component	Description
W1-ReplaceAssetLocal	Used to create, update, read, or delete W1- ReplaceAssetLocalthe WAM application.
	This component calls the W1- ReplaceAssetLocalbusiness object using ATW1ReplaceAssetLocal Inbound Web Service.
W1- Document	Used to create, update, read, or delete W1- Document in the WAM application.
	This component calls the W1- Document business object using ATW1Document Inbound Web Service.
W1- CrewWOSummary	Used to create, update, read, or delete W1- CrewWOSummary in the WAM application.
	This component calls the W1- CrewWOSummary business object using ATW1 CrewWOSummary Inbound Web Service.
W1- BatchLoaderRequest	Used to create, update, read, or delete W1- BatchLoaderRequest in the WAM application.
	This component calls the W1- BatchLoaderRequest business object using ATW1BatchLoaderRequest Inbound Web Service.
W1- ChangeRequest	Used to create, update, read, or delete W1- ChangeRequest in the WAM application.
	This component calls the W1- ChangeRequest business object using ATW1 ChangeRequest Inbound Web Service.
W1- RETSYNID	Used to create, update, read, or delete W1- RETSYNID in the WAM application.
	This component calls the W1- RETSYNID busines Service using ATW1 RETSYNID Inbound Web Service.
W1-RETOUTID	Used to create, update, read, or delete W1- RETOUTID in the WAM application.
	This component calls the W1- RETOUTID business service using ATW1 RETOUTID Inbound Web Service.
W1-MaintenanceEvent	Used to create, update, read, or delete W1- MaintenanceEvent in the WAM application.
	This component calls the W1-MaintenanceEvent business object using ATW1MaintenanceEvent Inbound Web Service.

Component	Description
W1-GenMaterialDisposition	Used to create, update, read, or delete W1- GenMaterialDisposition in the WAM application.
	This component calls the W1- GenMaterialDisposition business object using ATW1GenMaterialDisposition Inbound Web Service.
W1-MaintenanceManager	Used to create, update, read, or delete W1- MaintenanceManager in the WAM application.
	This component calls the W1-MaintenanceManager business object using ATW1MaintenanceManager Web Service.
W1-SEARCHOTHRESREQBY ACTIVITYID	Used to find all other resource requirements associated with a work activity.
	This component calls the ATW1RTAORID business service using the Inbound Web Service.
W1-SEARCHEQURESREQBY ACTIVITYID	Used to find all equipment requirements associated with a work activity.
	This component calls the ATW1RTAERID busines service using the Inbound Web Service.
W1-SEARCHLABRESREQBY ACTIVITYID	Used to find all labor resource requirements associated with a work activity.
	This component calls the ATW1RTALRID business service using the Inbound Web Service.
W1-SEARCHMATRESREQBY ACTIVITYID	Used to find all Material resource requirements associated with a work activity.
	This component calls the ATW1RTAMRID business service using the Inbound Web Service.
W1-TSDBYACTID	Used to retrieve all Time sheet details associated with a work activity.
	This component calls the ATW1TIMESHEETDETAILBYACTIVITYI business service using the Inbound Web Service.
W1-RETTSTPEM	Used to retrieve Timesheet using employee ID and time period.
	This component calls the W1-RETTSTPEM business service using the Inbound Web Service.
W1- RETTSDET	Used to retrieve Timesheet details.
	This component calls the W1-RETTSDET business service using the Inbound Web Service.

Component	Description
W1-RETINCOMM	Used to retrieve inbound communication details based on an activity.
	This component calls the W1-RETINCOMM business service using the Inbound Web Service.
W1-RETSHACT	Used to retrieve Service History Details using Activity ID.
	This component calls the ATW1RETSHACT business service using the Inbound Web Service.
W1-RetrieveComplEventsDtlByActId	Used to Retrieve Completion Events by Activity ID.
	This component calls the CM-RETCEVT business service using the Inbound Web Service.
W1-SEARCHEMPIDBYEXTID	Used to search employees by using external ID.
	This component calls 'W1-RETEMPLID' business service using the inbound web service.
W1-CMFieldActivityIdentifier	Used to search field activities by Activity identifier.
	This component calls the CM-ActivityIdentifier business service using the Inbound Web Service.
W1-CMFieldActivityWorkWindow	Used to search field activities by Activity work window.
	This component calls CM-ActivityWorkWindow business service using the inbound web service.
W1-CMFieldActivityLocation	Used to search field activities by Activity location.
	This component calls the CM-ActivityLocation business service using the Inbound Web Service.
W1-CMFieldActivityInformation	Used to search field activities by Activity information.
	This component calls CM-FieldActivityInformation business service using the inbound web service.
W1-CMPermitByInfo	Used to search permit by information.
	This component calls the CM-PERMITQ1 business service using the Inbound Web Service.
W1-CMPermitByIdentifier	Used to search permit by identifier.
	This component calls CM-PERMITQ2 business service using the inbound web service.

Component	Description
W1-CMActivityGenByInfo	Used to search activity generator data by information.
	This component calls the CM-WOQ1 business service using the Inbound Web Service.
W1-CMActivityGenByIdentifier	Used to search activity generator by identifier.
	This component calls CM-WOQ2 business service using the inbound web service.
W1-CMActivityGenByTemplateInfo	Used to search activity generator by template information.
	This component calls CM-WOQ3 business service using the inbound web service.
W1-CMActivityGenBySrvSchdInfo	Used to search activity generator using Service schedule information.
	This component calls the CM-WOQ4 business service using the Inbound Web Service.
W1-CMActivityGenByIdentifier	Used to search activity generator by identifier.
	This component calls CM-WOQ2 business service using the inbound web service.
W1-CMCopyNRebalanceActAstList	Used to perform Copy and Rebalance of Work Activity Asset List.
	This component calls 'CM-CPNRBAST' service script using the inbound web service.
W1- CMSCHEDULEDCREWSHIETRYA	Used to search crew shit using a activity ID.
CMSCHEDULEDCREWSHIFTBYA CTIVITYID	This component calls CM-ACTSCHLRQ business service using the inbound web service.
W1-CMWorkActivityByMaintSchedule Trigger	Used to search work activity details associated with a maintenance schedule trigger.
	This component calls CM-WAMSMT business service using the inbound web service.
W1-CMCommonWoActCostCale	Used to fetch cost details for a Construction Work Activity.
	This component calls W1-CommonWoActCostCalc business service using the inbound web service.
W1-GetWOFrmAssetId	Used to fetch Workorder ID from Asset ID.
	This component calls CM-WACTQ1-WO business service using the inbound web service.

Component	Description
W1-CMCrewShiftByServiceInfo	Used to search crew shift by service info in the WAM application.
	This component calls the CM-CRSHFQ1 business service using thee Inbound web service.
W1-CMCrewShiftByCrewInfo	Used to search crew shift by crew info in the WAM application.
	This component calls the CM-CRSHFQ2 business service using thee Inbound web service.
W1-CMCrewShiftByIndentifier	Used to search crew shift by identifier in the WAM application.
	This component calls the CM-CRSHFQ3 business service using thee Inbound web service.
W1-CMCrewShiftBySchdPlanInfo	Used to search crew shift by scheduled Plan information in the WAM application.
	This component calls the CM-CRSHFQ4 business service using thee Inbound web service.
W1-CMChangeReqByInfo	Used to search change request by information in the WAM application.
	This component calls the CM-CHGREQQ1 business service using thee Inbound web service.
W1-CMChangeReqByRelatedObj	Used to search change request by related object information in the WAM application.
	This component calls the CM-CHGREQQ2 business service using thee Inbound web service.
W1-CMChangeReqByIdentifier	Used to search change request by identifier in the WAM application.
	This component calls the CM-CHGREQQ3 business service using thee Inbound web service.

Resource Management

Invoicing

Component	Description
W1-InvoiceHeader	Used to create, update, read, or delete InvoiceHeader in the WAM application.
	This component calls the W1-InvoiceHeader business object using the Inbound Web Service.

Component	Description
W1-InvoiceLine	Used to create, update, read, or delete InvoiceLine in the WAM application.
	This component calls the W1-InvoiceLine business object using the Inbound Web Service.
W1-CMInvoiceHeaderInformation	Used to search Invoice header information in the WAM application.
	This component calls the CM-INVCHDRQ1 business service using the Inbound Web Service.
W1-CMInvoiceHeaderIdentifier	Used to search invoice using identifier in the WAM application.
	This component calls the CM-INVCHDRQ2 business service using the Inbound Web Service.
W1-CMInvoiceLineInformation	Used to search invoice using line information in the WAM application.
	This component calls the CM-INVCHDRQ3 business service using the Inbound Web Service.

Integration

Component	Description
W1- ReadAssetLocationId	Used to read an Asset Location ID (asset node) using an External ID.
	This component calls the CM-ASTLOCID business service using the Inbound Web Service (ATW1READASSETLOCID).
W1-SIDIntegInbound	Used to create, update, read, or delete SIDIntegInbound in the WAM application.
	This component calls the W1-SIDIntegInbound business object using the Inbound Web Service.
W1-CMAssetQuery	Used to for fetching asset location, asset details using GIS ID, Asset and Node information in the WAM application.
	This component calls the W1-AssetQry business service using the Inbound Web Service.
W1-ServiceHistoryWAMConv	Used to create, update, read, or delete ServiceHistoryWAMConv in the WAM application.
	This component calls the W1- ServiceHistoryWAMConv business object using the Inbound Web Service.

Component	Description
W1-CMRETCOMIDSQL	Used to fetch the latest Inbound Communication II based communication type in the WAM application
	This component calls the CM-RETCOMID business service using the Inbound Web Service.
W1-ReadServiceHistoryId	Used to read an Service History ID (install event from Oracle Utilities Meter Data Management) using an External ID.
	This component calls the CM-READSRVHSTID business service using the Inbound Web Service (ATW1READSRVHSTID).
W1- ReadContact	Used to read a Contact using an External ID.
	This component calls the CM-READCNCT business service using the Inbound Web Service (ATW1READCONTACT).
W1-CMActivityMaterialUsage	Used to create, update and read an Activity Materia Usage in the WAM application.
	This component calls the It calls W1- ActivityMaterialUsage BO internally.
W1-VendorLocIntegOutbound	Used to create, update, read, or delete VendorLocIntegOutbound in the WAM application
	This component calls the W1- VendorLocIntegOutbound business object using the Inbound Web Service.
W2-FirmwareUpgradeOutboundMsg	Used to create, update, read, or delete FirmwareUpgradeOutboundMsg in the WAM application.
	This component calls the W2- FirmwareUpgradeOutboundMsg business object using the Inbound Web Service.
W1-VendorLocIntegOutbound	Used to create, update, read, or delete VendorLocIntegOutbound in the WAM application
	This component calls the W1- VendorLocIntegOutbound business object using the Inbound Web Service.
W1-SynchronizationAddExpCode	Used to create, update, read, or delete SynchronizationAddExpCode in the WAM application.
	This component calls the W1- SynchronizationAddExpCode business object using the Inbound Web Service.

Component	Description
W1-SynchronizationAddEmployee	Used to create, update, read, or delete SynchronizationAddEmployee in the WAM application.
	This component calls the W1- SynchronizationAddEmployee business object using the Inbound Web Service.
W1-SynchronizationAddCostCtr	Used to create, update, read, or delete SynchronizationAddCostCtr in the WAM application.
	This component calls the W1- SynchronizationAddCostCtr business object using the Inbound Web Service.
W1-SyncRequestSeeder	Used to create, update, read, or delete SyncRequestSeeder in the WAM application.
	This component calls the W1-SyncRequestSeeder business object using the Inbound Web Service.
W1-SynchronizationAddVendorLoc	Used to create, update, read, or delete SynchronizationAddVendorLoc in the WAM application.
	This component calls the W1- SynchronizationAddVendorLoc business object using the Inbound Web Service.
W1-SyncRequest	Used to create, update, read, or delete SyncRequest in the WAM application.
	This component calls the W1-SyncRequest business object using the Inbound Web Service.
W1-StockTransIntegInbound	Used to create, update, read, or delete StockTransIntegInbound in the WAM application.
	This component calls the W1- StockTransIntegInbound business object using the Inbound Web Service.
W1-ServiceHistoryWAMConv	Used to create, update, read, or delete ServiceHistoryWAMConv in the WAM application.
	This component calls the W1- ServiceHistoryWAMConv business object using the Inbound Web Service.
W1-SIDIntegInbound	Used to create, update, read, or delete SIDIntegInbound in the WAM application.
	This component calls the W1-SIDIntegInbound business object using the Inbound Web Service.

Component	Description
W1-ReceiptHeaderIntegration	Used to create, update, read, or delete ReceiptHeaderIntegration in the WAM application.
	This component calls the W1- ReceiptHeaderIntegration business object using the Inbound Web Service.
W1-PurchaseReturnLineInteg	Used to create, update, read, or delete PurchaseReturnLineInteg in the WAM application.
	This component calls the W1- PurchaseReturnLineInteg business object using the Inbound Web Service.
W1-PurchaseReturnIntegInbound	Used to create, update, read, or delete PurchaseReturnIntegInbound in the WAM application.
	This component calls the W1- PurchaseReturnIntegInbound business object using the Inbound Web Service.
W1-PurchaseReqIntegOutbound	Used to create, update, read, or delete PurchaseReqIntegOutbound in the WAM application.
	This component calls the W1- PurchaseReqIntegOutbound business object using the Inbound Web Service.
W1-PurReqIntegOutMsg	Used to create, update, read, or delete PurReqIntegOutMsg in the WAM application.
	This component calls the W1-PurReqIntegOutMsg business object using the Inbound Web Service.
W1-OutboundAcknowledgeMessage	Used to create, update, read, or delete OutboundAcknowledgeMessage in the WAM application.
	This component calls the W1- OutboundAcknowledgeMessage business object using the Inbound Web Service.
W1-OngoingSyncRequestLocation	Used to create, update, read, or delete OngoingSyncRequestLocation in the WAM application.
	This component calls the W1- OngoingSyncRequestLocation business object using the Inbound Web Service.

Component	Description
W1-OngoingSyncRequestAsset	Used to create, update, read, or delete OngoingSyncRequestAsset in the WAM application
	This component calls the W1- OngoingSyncRequestAsset business object using the Inbound Web Service.
W1-NdAsAttToAsOutboundMessage	Used to create, update, read, or delete NdAsAttToAsOutboundMessage in the WAM application.
	This component calls the W1- NdAsAttToAsOutboundMessage business object using the Inbound Web Service.
W1-MatlReqIntegOutMsg	Used to create, update, read, or delete MatlReqIntegOutMsg in the WAM application.
	This component calls the W1-MatlReqIntegOutMsg business object using the Inbound Web Service.
W1-MaterialReturnHeaderInteg	Used to create, update, read, or delete MaterialReturnHeaderInteg in the WAM application.
	This component calls the W1- MaterialReturnHeaderInteg business object using the Inbound Web Service.
W1-MaterialReturnIntegInbound	Used to create, update, read, or delete MaterialReturnIntegInbound in the WAM application.
	This component calls the W1- MaterialReturnIntegInbound business object using the Inbound Web Service.
W1-MaterialReturnLineInteg	Used to create, update, read, or delete MaterialReturnLineInteg in the WAM application.
	This component calls the W1- MaterialReturnLineInteg business object using the Inbound Web Service.
W1-OngoingSyncRequestContact	Used to create, update, read, or delete OngoingSyncRequestContact in the WAM application.
	This component calls the W1- OngoingSyncRequestContact business object using the Inbound Web Service.

Component	Description
W1-OngoingSyncRequestVendorLoc	Used to create, update, read, or delete OngoingSyncRequestVendorLoc in the WAM application.
	This component calls the W1- OngoingSyncRequestVendorLoc business object using the Inbound Web Service.
W1-MaterialIssueLineInteg	Used to create, update, read, or delete MaterialIssueLineInteg in the WAM application.
	This component calls the W1- MaterialIssueLineInteg business object using the Inbound Web Service.
W1-MaterialIssueIntegInbound	Used to create, update, read, or delete MaterialIssueIntegInbound in the WAM application.
	This component calls the W1- MaterialIssueIntegInbound business object using the Inbound Web Service.
W1-InvoiceLineIntegration	Used to create, update, read, or delete InvoiceLineIntegration in the WAM application.
	This component calls the W1- InvoiceLineIntegration business object using the Inbound Web Service.
W1-InvoiceIntegOutbound	Used to create, update, read, or delete InvoiceIntegOutbound in the WAM application.
	This component calls the W1- InvoiceIntegOutbound business object using the Inbound Web Service.
W1-InvoicePaymentIntegInbound	Used to create, update, read, or delete InvoicePaymentIntegInbound in the WAM application.
	This component calls the W1- InvoicePaymentIntegInbound business object using the Inbound Web Service.
W1-InvoiceIntegOutMsg	Used to create, update, read, or delete InvoiceIntegOutMsg in the WAM application.
	This component calls the W1-InvoiceIntegOutMsg business object using the Inbound Web Service.
W1-InititialSyncReqWorkLoc	Used to create, update, read, or delete InititialSyncReqWorkLoc in the WAM application.
	This component calls the W1- InititialSyncReqWorkLoc business object using the Inbound Web Service.

Component	Description
W1-AcceptLineIntegration	Used to create, update, read, or delete AcceptLineIntegration in the WAM application.
	This component calls the W1-AcceptLineIntegration business object using the Inbound Web Service.
W1-ActivityOutboundSyncRequest	Used to create, update, read, or delete ActivityOutboundSyncRequest in the WAM application.
	This component calls the W1- ActivityOutboundSyncRequest business object using the Inbound Web Service.
W1-AssessGrpConv	Used to create, update, read, or delete AssessGrpConv in the WAM application.
	This component calls the W1-AssessGrpConv business object using the Inbound Web Service.
W1-AssetBusinessFlag	Used to create, update, read, or delete AssetBusinessFlag in the WAM application.
	This component calls the W1-AssetBusinessFlag business object using the Inbound Web Service.
W1-BlanketContractIntegInbound	Used to create, update, read, or delete BlanketContractIntegInbound in the WAM application.
	This component calls the W1- BlanketContractIntegInbound business object using the Inbound Web Service.
W1-BusinessFlagType	Used to create, update, read, or delete BusinessFlagType in the WAM application.
	This component calls the W1-BusinessFlagType business object using the Inbound Web Service.
W1-CMRTBFIDEXT	Used to read CMRTBFIDEXT in the WAM application.
	This component calls the W1-CMRTBFIDEXT business service using the Inbound Web Service.
W1-CompositeSyncReqCmdtyName	Used to create, update, read, or delete CompositeSyncReqCmdtyName in the WAM application.
	This component calls the W1- CompositeSyncReqCmdtyName business object using the Inbound Web Service.

Component	Description
W1-CompositeSyncReqCmdtyType	Used to create, update, read, or delete CompositeSyncReqCmdtyType in the WAM application.
	This component calls the W1- CompositeSyncReqCmdtyType business object using the Inbound Web Service.
W1-CompositeSyncReqGISAsset	Used to create, update, read, or delete CompositeSyncReqGISAsset in the WAM application.
	This component calls the W1- CompositeSyncReqGISAsset business object using the Inbound Web Service.
W1-CreateMobileWOInboundComm	Used to create, update, read, or delete CreateMobileWOInboundComm in the WAM application.
	This component calls the W1- CreateMobileWOInboundComm business object using the Inbound Web Service.
W1-ErpIntegration	Used to create, update, read, or delete ErpIntegration in the WAM application.
	This component calls the W1-ErpIntegration business object using the Inbound Web Service.
W1-FinancialTransIntegInbound	Used to create, update, read, or delete FinancialTransIntegInbound in the WAM application.
	This component calls the W1- Financial TransIntegInbound business object using the Inbound Web Service.
W1-FinancialTransIntegOutMsg	Used to create, update, read, or delete FinancialTransIntegOutMsg in the WAM application.
	This component calls the W1- FinancialTransIntegOutMsg business object using the Inbound Web Service.
W1-FinancialTransIntegOutbound	Used to create, update, read, or delete FinancialTransIntegOutbound in the WAM application.
	This component calls the W1- FinancialTransIntegOutbound business object usin the Inbound Web Service.

Component	Description
W1-FldwrkPIPActFinalOutMsg	Used to create, update, read, or delete FldwrkPIPActFinalOutMsg in the WAM application
	This component calls the W1- FldwrkPIPActFinalOutMsg business object using the Inbound Web Service.
W1-FldwrkPIPActMaintOutMsg	Used to create, update, read, or delete FldwrkPIPActMaintOutMsg in the WAM application.
	This component calls the W1- FldwrkPIPActMaintOutMsg business object using the Inbound Web Service.
W1-GISAssetSyncReqOutMsg	Used to create, update, read, or delete GISAssetSyncReqOutMsg in the WAM application
	This component calls the W1- GISAssetSyncReqOutMsg business object using the Inbound Web Service.
W1-GISAssetSyncRequest	Used to create, update, read, or delete GISAssetSyncRequest in the WAM application.
	This component calls the W1-GISAssetSyncReques business object using the Inbound Web Service.
W1-GISWorkLocSyncReqOutMsg	Used to create, update, read, or delete GISWorkLocSyncReqOutMsg in the WAM application.
	This component calls the W1- GISWorkLocSyncReqOutMsg business object using the Inbound Web Service.
W1-GISWorkLocSyncRequest	Used to create, update, read, or delete GISWorkLocSyncRequest in the WAM application
	This component calls the W1- GISWorkLocSyncRequest business object using the Inbound Web Service.
W1-InitialSyncReqActivity	Used to create, update, read, or delete InitialSyncReqActivity in the WAM application.
	This component calls the W1-InitialSyncReqActivity business object using the Inbound Web Service.
W1-InitialSyncReqCommodityCat	Used to create, update, read, or delete InitialSyncReqCommodityCat in the WAM application.
	This component calls the W1- InitialSyncReqCommodityCat business object using the Inbound Web Service.

Component	Description
W1-InitialSyncReqCommodityName	Used to create, update, read, or delete InitialSyncReqCommodityName in the WAM application.
	This component calls the W1- InitialSyncReqCommodityName business object using the Inbound Web Service.
W1-InitialSyncReqCommodityType	Used to create, update, read, or delete InitialSyncReqCommodityType in the WAM application.
	This component calls the W1- InitialSyncReqCommodityType business object using the Inbound Web Service.
W1-InitialSyncReqCostCenter	Used to create, update, read, or delete InitialSyncReqCostCenter in the WAM application.
	This component calls the W1- InitialSyncReqCostCenter business object using the Inbound Web Service.
W1-InitialSyncReqExpenseCode	Used to create, update, read, or delete InitialSyncReqExpenseCode in the WAM application.
	This component calls the W1- InitialSyncReqExpenseCode business object using the Inbound Web Service.
W1-InitialSyncReqMaintSchedule	Used to create, update, read, or delete InitialSyncReqMaintSchedule in the WAM application.
	This component calls the W1- InitialSyncReqMaintSchedule business object using the Inbound Web Service.
W1-InitialSyncReqManufacturer	Used to create, update, read, or delete InitialSyncReqManufacturer in the WAM application.
	This component calls the W1- InitialSyncReqManufacturer business object using the Inbound Web Service.
W1-InitialSyncReqPMTrigger	Used to create, update, read, or delete InitialSyncReqPMTrigger in the WAM application.
	This component calls the W1- InitialSyncReqPMTrigger business object using the Inbound Web Service.

Component	Description
W1-InitialSyncReqPlanner	Used to create, update, read, or delete InitialSyncReqPlanner in the WAM application.
	This component calls the W1-InitialSyncReqPlanner business object using the Inbound Web Service.
W1-InitialSyncReqProject	Used to create, update, read, or delete InitialSyncReqProject in the WAM application.
	This component calls the W1-InitialSyncReqProject business object using the Inbound Web Service.
W1-InitialSyncReqServiceHist	Used to create, update, read, or delete InitialSyncReqServiceHist in the WAM application.
	This component calls the W1- InitialSyncReqServiceHist business object using the Inbound Web Service.
W1-InitialSyncReqSpecification	Used to create, update, read, or delete InitialSyncReqSpecification in the WAM application
	This component calls the W1- InitialSyncReqSpecification business object using th Inbound Web Service.
W1-InitialSyncReqTmplActivity	Used to create, update, read, or delete InitialSyncReqTmplActivity in the WAM application
	This component calls the W1- InitialSyncReqTmplActivity business object using the Inbound Web Service.
W1-InitialSyncReqTmplWorkOrder	Used to create, update, read, or delete InitialSyncReqTmplWorkOrder in the WAM application.
	This component calls the W1- InitialSyncReqTmplWorkOrder business object using the Inbound Web Service.
W1-InitialSyncReqWorkOrder	Used to create, update, read, or delete InitialSyncReqWorkOrder in the WAM application
	This component calls the W1- InitialSyncReqWorkOrder business object using the Inbound Web Service.
W1-InitialSyncRequestAsset	Used to create, update, read, or delete InitialSyncRequestAsset in the WAM application.
	This component calls the W1- InitialSyncRequestAsset business object using the Inbound Web Service.

Component	Description
W1-InitialSyncRequestContact	Used to create, update, read, or delete InitialSyncRequestContact in the WAM application
	This component calls the W1- InitialSyncRequestContact business object using th Inbound Web Service.
W1-InitialSyncRequestLocation	Used to create, update, read, or delete InitialSyncRequestLocation in the WAM application
	This component calls the W1- InitialSyncRequestLocation business object using th Inbound Web Service.
W1-InterfaceODCInboundComm	Used to create, update, read, or delete InterfaceODCInboundComm in the WAM application.
	This component calls the W1- InterfaceODCInboundComm business object usin the Inbound Web Service.
W1-InvoiceIntegInbound	Used to create, update, read, or delete InvoiceIntegInbound in the WAM application.
	This component calls the W1-InvoiceIntegInbound business object using the Inbound Web Service.
W1-MDMAssetSyncReqOutMsg	Used to create, update, read, or delete MDMAssetSyncReqOutMsg in the WAM application.
	This component calls the W1- MDMAssetSyncReqOutMsg business object using the Inbound Web Service.
W1-MDMAssetSyncRequest	Used to create, update, read, or delete MDMAssetSyncRequest in the WAM application.
	This component calls the W1- MDMAssetSyncRequest business object using the Inbound Web Service.
W1-MaterialReqIntegOutbound	Used to create, update, read, or delete MaterialReqIntegOutbound in the WAM application
	This component calls the W1- MaterialReqIntegOutbound business object using the Inbound Web Service.
W1-ReceiptLineIntegration	Used to create, update, read, or delete ReceiptLineIntegration in the WAM application.
	This component calls the W1- ReceiptLineIntegration business object using the Inbound Web Service.

Component	Description
W1-UpgDeviceOutboundMessage	Used to create, update, read, or delete UpgDeviceOutboundMessage in the WAM application.
	This component calls the W1- UpgDeviceOutboundMessage business object using the Inbound Web Service.
W1-VendorLocIntegOutMsg	Used to create, update, read, or delete VendorLocIntegOutMsg in the WAM application.
	This component calls the W1- VendorLocIntegOutMsg business object using the Inbound Web Service.
W2-FirmwareCommandOutbound	Used to create, update, read, or delete FirmwareCommandOutbound in the WAM application.
	This component calls the W2- FirmwareCommandOutbound business object using the Inbound Web Service.
W1-SynchronizationAddVendorLoc	Used to create, update, read, or delete SynchronizationAddVendorLoc in the WAM application.
	This component calls the W1- SynchronizationAddVendorLoc business object using the Inbound Web Service.
W1-SynchronizationAddExpCode	Used to create, update, read, or delete SynchronizationAddExpCode in the WAM application.
	This component calls the W1- SynchronizationAddExpCode business object using the Inbound Web Service.
W1-SynchronizationAddEmployee	Used to create, update, read, or delete SynchronizationAddEmployee in the WAM application.
	This component calls the W1- SynchronizationAddEmployee business object using the Inbound Web Service.
W1-SynchronizationAddCostCtr	Used to create, update, read, or delete SynchronizationAddCostCtr in the WAM application.
	This component calls the W1- SynchronizationAddCostCtr business object using the Inbound Web Service.

Component	Description
W1-SyncRequestSeeder	Used to create, update, read, or delete SyncRequestSeeder in the WAM application.
	This component calls the W1-SyncRequestSeeder business object using the Inbound Web Service.
W1-StockTransIntegInbound	Used to create, update, read, or delete StockTransIntegInbound in the WAM application.
	This component calls the W1- StockTransIntegInbound business object using the Inbound Web Service.
W1-SyncRequest	Used to create, update, read, or delete SyncRequest in the WAM application.
	This component calls the W1-SyncRequest business object using the Inbound Web Service.
W1-VendorLocIntegOutMsg	Used to create, update, read, or delete VendorLocIntegOutMsg in the WAM application.
	This component calls the W1- VendorLocIntegOutMsg business object using the Inbound Web Service.
W1-UpgDeviceOutboundMessage	Used to create, update, read, or delete UpgDeviceOutboundMessage in the WAM application.
	This component calls the W1- UpgDeviceOutboundMessage business object using the Inbound Web Service.
W1-ReceiptIntegInbound	Used to create, update, read, or delete ReceiptInboundIntegration in the WAM application
	This component calls the W1- ReceiptIntegInbound business object using Inbound Web Service.
W2-FirmwareUpgradeOutboundMsg	Used to create, update, read, or delete FirmwareUpgradeOutboundMsg in the WAM application.
	This component calls the W2- FirmwareUpgradeOutboundMsg business object using the Inbound Web Service.
W2-FirmwareCommandOutbound	Used to create, update, read, or delete FirmwareCommandOutbound in the WAM application.
	This component calls the W2- FirmwareCommandOutbound business object using the Inbound Web Service.

Component	Description
W1- InterfaceTSDInboundComm	Used to create, update, read, or delete InterfaceTSDInboundComm in the WAM application.
	This component calls the W1- InterfaceTSDInboundComm business object using Inbound Web Service.
W1-LeaveInt	Used to create, update, read, or delete LeaveInt in the WAM application.
	This component calls the W1-LeaveInt business object using Inbound Web Service.
W1-OngoingSyncRequestCostCtr	Used to create, update, read, or delete OngoingSyncRequestCostCtr in the WAM application.
	This component calls the W1- OngoingSyncRequestCostCtr business object using Inbound Web Service.
W1-OngoingSyncRequestEmployee	Used to create, update, read, or delete OngoingSyncRequestEmployeein the WAM application.
	This component calls the W1- OngoingSyncRequestEmployee business object using Inbound Web Service.
W1-OngoingSyncRequestAssetNode	Used to create, update, read, or delete OngoingSyncRequestAssetNode in the WAM application.
	This component calls the W1- OngoingSyncRequestAssetNode business object using Inbound Web Service.
W1-OngoingSyncRequestStockItem	Used to create, update, read, or delete OngoingSyncRequestStockItem in the WAM application.
	This component calls the W1- OngoingSyncRequestStockItem business object using Inbound Web Service.
W1-PurchaseOrderIntegInbound	Used to create, update, read, or delete PurchaseOrderIntegInbound in the WAM application.
	This component calls the W1- PurchaseOrderIntegInbound business object using Inbound Web Service.

Component	Description
W1-IntODCDtl	Used to create Other direct charges from Oracle Field Service (OFS).
	This component calls W1-IntCODtl script using an inbound web service.
W1-CreateMobileWorkOrder	Used to create Mobile Work Order from OFS with Work It flag.
	This component calls W1-CreMobWo script using an inbound web service.
W1-IntTMSDtl	Used to create time sheet from OFS.
	This component calls W1-IntCTMSDt script using an inbound web service.
W1-SyncReqStockItemByExternalId	Used to retrieve sync request id by External Reference ID and External System.
	This component calls the CM- OngoingSyncRequestStockItem business service using Inbound Web Service.

Construction Work Management

Component	Description
W1-ActivityReconciliation	Used to create, update, read, or delete ActivityReconciliation in the WAM application.
	This component calls the W1-ActivityReconciliation business object using the ATW1ActivityReconciliation Inbound Web Service.
W1-RTNCSVCCL	Used to read RTNCSVCCL in the WAM application.
	This component calls the W1-RTNCSVCCL business service using the Inbound Web Service.
W1-RTASSETCU	Used to read RTASSETCU in the WAM application.
	This component calls the W1-RTASSETCU business service using the Inbound Web Service.
W1-ConstructionLoc	Used to create, update, read, or delete Construction Location in the WAM application.
	This component calls the W1-Construction Location business object using the ATW1ConstructionLocation Inbound Web Service.

Component	Description
W1-ConstructionWorkActivity	Used to create, update, read, or delete ConstructionWorkActivity in the WAM application
	This component calls the W1- ConstructionWorkActivity business object using the ATW1ConstructionWorkActivity Inbound Web Service.
W1-TmplConstructionActivity	Used to create, update, read, or delete Template ConstructionWorkActivity in the WAM application
	This component calls the W1- TmplConstructionActivity business object using the ATW1TmplConstructionActivity Inbound Web Service.
W1-ConstructionWorkOrder	Used to create, update, read, or delete ConstructionWorkOrder in the WAM application.
	This component calls the W1- ConstructionWorkOrder business object using the ATW1ConstructionWorkActivity Inbound Web Service.
W1-TmplConstructionWorkOrder	Used to create, update, read, or delete Template Construction Work Order in the WAM application.
	This component calls the W1- TmplConstructionWorkOrder business object using ATW1TmplConstructionWorkOrder inbound web service.
W1-ConstrWorkActivityType	Used to create, update, read, or delete ConstrWorkActivityType in the WAM application.
	This component calls the W1- ConstrWorkActivityType business object using the ATW1ConstrWorkActivityType Inbound Web Service.
W1-ContractorBid	Used to create, update, read, or delete ContractorBid in the WAM application.
	This component calls the W1-ContractorBid business object using the ATW1ContractorBid Inbound Web Service.
W1-ContractorBidNotes	Used to create, update, read, or delete ContractorBidNotes in the WAM application.
	This component calls the W1-ContractorBidNotes business object using the ATW1ContractorBidNote Inbound Web Service.

Component	Description
W1-ContractorBidRefAttachments	Used to create, update, read, or delete ContractorBidRefAttachments in the WAM application.
	This component calls the W1- ContractorBidRefAttachments business object using the ATW1ContractorBidRefAttachments Inbound Web Service.
W1-CrewTypeCUEquipmentProfile	Used to create, update, read, or delete CrewTypeCUEquipmentProfile in the WAM application.
	This component calls the W1- CrewTypeCUEquipmentProfile business object using the ATW1CrewTypeCUEquipmentProfile Inbound Web Service.
W1-CrewTypeCULaborProfile	Used to create, update, read, or delete CrewTypeCULaborProfile in the WAM application.
	This component calls the W1- CrewTypeCULaborProfile business object using the ATW1CrewTypeCULaborProfile Inbound Web Service.
W1-CrewTypeCUProfile	Used to create, update, read, or delete CrewTypeCUProfile in the WAM application.
	This component calls the W1- CrewTypeCUProfile business object using the ATW1CrewTypeCUProfile Inbound Web Service.
W1-CU	Used to create, update, read, or delete Compatibility Unit in the WAM application.
	This component calls the W1- CU business object using the ATW1CU Inbound Web Service.
W1-CUCategory	Used to create, update, read, or delete CUCategory in the WAM application.
	This component calls the W1- CUCategory business object using the ATW1CUCategory Inbound Web Service.
W1-CULaborAndEquipment	Used to create, update, read, or delete CULaborAndEquipment in the WAM application.
	This component calls the W1- CULaborAndEquipment business object using the ATW1CULaborAndEquipment Inbound Web Service.

Component	Description
W1-CUMaterialResources	Used to create, update, read, or delete CUMaterialResources in the WAM application.
	This component calls the W1- CUMaterialResource business object using the ATW1CUMaterialResources Inbound Web Service
W1-CUMaterialsForRemoval	Used to create, update, read, or delete CUMaterialsForRemoval in the WAM application.
	This component calls the W1- CUMaterialsForRemoval business object using the ATW1CUMaterialsForRemoval Inbound Web Service.
W1-CUNotes	Used to create, update, read, or delete CUNotes in the WAM application.
	This component calls the W1- CUNotes business object using the ATW1CUNotes Inbound Web Service.
W1-CURefAttachments	Used to create, update, read, or delete CURefAttachments in the WAM application.
	This component calls the W1-CURefAttachments business object using the ATW1CURefAttachment Inbound Web Service.
W1-CompatibleUnitSet	Used to create, update, read, or delete CUSET in th WAM application.
	This component calls the W1- CUSET business object using the ATW1CUSET Inbound Web Service.
W1-CUSetNotes	Used to create, update, read, or delete CUSetNotes in the WAM application.
	This component calls the W1- CUSetNotes busines object using the ATW1CUSetNotes Inbound Web Service.
W1-CUSetRefAttachments	Used to create, update, read, or delete CUSetRefAttachments in the WAM application.
	This component calls the W1- CUSetRefAttachments business object using the ATW1CUSetRefAttachments Inbound Web Service
W1-CUUsage	Used to create, update, read, or delete CUUsage in the WAM application.
	This component calls the W1- CUUsage business object using the ATW1CUUsage Inbound Web Service.

Component	Description
W1-DeleteGeneralProcessRecord	Used to read DeleteGeneralProcessRecord in the WAM application.
	This component calls the W1- DeleteGeneralProcessRecord business service using the ATW1DeleteGeneralProcessRecord Inbound Web Service.
W1-DesignElement	Used to create, update, read, or delete DesignElement in the WAM application.
	This component calls the W1-DesignElement business object using the ATW1DesignElement Inbound Web Service.
W1-DesignElementCU	Used to create, update, read, or delete DesignElementCU in the WAM application.
	This component calls the W1-DesignElementCU business object using the ATW1DesignElementCU Inbound Web Service.
W1-DesignElementItems	Used to create, update, read, or delete DesignElementItems in the WAM application.
	This component calls the W1- DesignElementItem business object using the ATW1DesignElementItems Inbound Web Service.
W1-EquipmentGroup	Used to create, update, read, or delete EquipmentGroup in the WAM application.
	This component calls the W1- EquipmentGroup business object using the ATW1EquipmentGroup Inbound Web Service.
W1-Overhead	Used to create, update, read, or delete Overhead in the WAM application.
	This component calls the W1- Overhead business object using the ATW1Overhead Inbound Web Service.
W1-PropUnit	Used to create, update, read, or delete Property Uni in the WAM application.
	This component calls the W1-PropUnit object using the ATW1PropUnit Inbound Web Service.
W1-PropUnitBundlingAddBO	Used to create, update, read, or delete Property Uni Bundling in the WAM application.
	This component calls the W1- PropUnitBundlingAddBO object using the ATW1PropUnitBundlingAddBO Inbound Web Service.

Component	Description
W1-PropUnitPhysicalBO	Used to create, update, read, or delete Property Uni physical in the WAM application.
	This component calls the W1- PropUnitPhysicalBC object using the ATW1PropUnitPhysicalBO Inbound Web Service.
W1-RETCLCUCC	Used to read/retrieve Construction Location Expanded CU/Cost Center in the WAM application
	This component calls the W1-RETCLCUCC business service using the ATW1RETCLCUCC Inbound Web Service.
W1-RETCUHIER	Used to read/retrieve CU Hierarchy in the WAM application.
	This component calls the W1-RETCUHIER business service using the ATW1RETCUHIER Inbound Web Service.
W1-RETCURESO	Used to read/retrieve CU Resources in the WAM application.
	This component calls the W1-RETCURESO business service using the ATW1RETCURESO Inbound Web Service.
W1-RETDEHIER	Used to read/retrieve Design Element Hierarchy in the WAM application.
	This component calls the W1-RETDEHIER business service using the ATW1RETDEHIER Inbound Web Service.
W1-RETREFCU	Used to read/retrieve Referencing CU with Propert Unit in the WAM application.
	This component calls the W1-RETREFCU busines service using the ATW1RETREFCU Inbound Wel Service.
W1-RETREFDCU	Used to read/retrieve Referencing CU with Propert Unit in the WAM application.
	This component calls the W1-RETREFCU busines service using the ATW1RETREFCU Inbound Wel Service.
W1-RETWDDE	Used to read/retrieve Design in the WAM application.
	This component calls the W1-RETWDDE busines service using the ATW1RETWDDE Inbound Web Service.

Component	Description
W1-RNCACTRRQ	Used to read/retrieve Non-Cancelled Activity Resource Requirement for Resource Type/Stock Item in the WAM application.
	This component calls the W1- RNCACTRRQ business service using the ATW1RNCACTRRQ Inbound Web Service.
W1-RSTITAUPR	Used to read/retrieve Stock Item Average Unit Price in the WAM application.
	This component calls the W1-RSTITAUPR busines service using the ATW1RSTITAUPR Inbound Wel Service.
W1-RTACONLAS	Used to read/retrieve Activity Construction Location Assets in the WAM application.
	This component calls the W1-RTACONLAS business service using the ATW1RTACONLAS Inbound Web Service.
W1-RTACTACGL	Used to read/retrieve Activity Actual Cost Grouped by GL Entry in the WAM application.
	This component calls the W1-RTACTACGL business service using the ATW1RTACTACGL Inbound Web Service.
W1-RTACTACRC	Used to read/retrieve Activity Actual Cost Grouped by GL Entry in the WAM application.
	This component calls the W1-RTACTACRC business service using the ATW1RTACTACRC Inbound Web Service.
W1-RTACTRCON	Used to read/retrieve Activity Reconciliation for an Activity in the WAM application.
	This component calls the W1-RTACTRCON business service using the ATW1RTACTRCON Inbound Web Service.
W1-RTCBASTPU	Used to read/retrieve Contributed Asset Property Unit in the WAM application.
	This component calls the W1-RTCBASTPU business service using the ATW1RTCBASTPU Inbound Web Service.
W1-RTCCCUUSG	Used to read/retrieve Cost Center for Usage in the WAM application.
	This component calls the W1-RTCCCUUSG business service using the ATW1RTCCCUUSG Inbound Web Service.

Component	Description
W1-RTCNASTPU	Used to read/retrieve Constructed Asset for a Property Unit in the WAM application.
	This component calls the W1- RTCNASTPU business service using the ATW1RTCNASTPU Inbound Web Service.
W1-RTCONLACU	Used to read/retrieve Construction Location Applicable CU's in the WAM application.
	This component calls the W1- RTCONLACU business service using the ATW1RTCONLACU Inbound Web Service.
W1-RTCRACTTY	Used to read/retrieve Construction Related Activity Types in the WAM application.
	This component calls the W1-RTCRACTTY business service using the ATW1RTCRACTTY Inbound Web Service.
W1-RTCUSTCU	Used to read/retrieve CU Set CU's in the WAM application.
	This component calls the W1- RTCUSTCU busines service using the ATW1RTCUSTCU Inbound Web Service.
W1-RTEASTISD	Used to read/Retrieve Earliest Asset In Service Date in the WAM application.
	This component calls the W1- RTEASTISD business service using the ATW1RTEASTISD Inbound Web Service.
W1-RTNFODCDT	Used to read/retrieve Non-Final ODC Details in the WAM application.
	This component calls the W1-RTNFODCDT business service using the ATW1RTNFODCDT Inbound Web Service.
W1-RTNFTSDTL	Used to read/retrieve Non-Final Timesheet Details in the WAM application.
	This component calls the W1-RTNFTSDTL business service using the ATW1RTNFTSDTL Inbound Web Service.
W1-RTNFWOACT	Used to read/retrieve Non-Final Non-Overhead Activities in the WAM application.
	This component calls the W1- RTNFWOACT business service using the ATW1RTNFWOACT Inbound Web Service.

Component	Description
W1-RTPRCPAST	Used to read/retrieve Pre-Capitalized Assets in the WAM application.
	This component calls the W1- RTPRCPAST business service using the ATW1RTPRCPAST Inbound Web Service.
W1-RTVLTASTY	Used to read/retrieve Valid Location Type for Asse Type in the WAM application.
	This component calls the W1- RTVLTASTY business service using the ATW1RTVLTASTY Inbound Web Service.
W1-WDRefAttachments	Used to create, update, read, or delete Work Design RefAttachments in the WAM application.
	This component calls the W1-WDRefAttachments object using the ATW1WDRefAttachments Inbound Web Service.
W1-WorkDesign	Used to create, update, read, or delete Work Design in the WAM application.
	This component calls the W1-WorkDesign object using the ATW1WorkDesign Inbound Web Service
W1-WorkDesignNotes	Used to create, update, read, or delete WorkDesignNotes in the WAM application.
	This component calls the W1-WorkDesignNotes object using the ATW1WorkDesignNotes Inbound Web Service.
W1-CWM-RetriveReconID	Used to read/retrieving Activity Reconcilition ID from Activity in the WAM application.
	This component calls the ATW1RTARID business service using the ATW1RTARID Inbound Web Service.
W1-DTOHCSTSQL	Used to read/retrieve Direct Overhead Cost for Activity in the WAM application.
	This component calls the CM-DTOHCST business service using the ATW1DTOHCST Inbound Web Service.
W1- IDTOHCSTSQL	Used to read/retrieve InDirect Overhead cost for the activity in the WAM Application.
	This component calls the CM-IDTOHCST busines service using the ATW1IDTOHCST Inbound Web Service.

Component	Description
W1-CUAccessory	Used to create, update, read, or delete Accessory CU in the WAM application.
	This component calls the W1-CUAccessory object using the ATW1CUAccessory Inbound Web Service.
W1-CUFunction	Used to create, update, read, or delete Functional CU in the WAM application.
	This component calls the W1-CUFunction object using the ATW1CUFunction Inbound Web Service.

Oracle Utilities Operational Device Management Components

This section lists the starter components available in Oracle Utilities Operational Device Management.

Pre-requisites: The Inbound Web Service using the respective business object should be available in the application.

Additional Notes: Failure while creating, reading, or updating the component is logged to the test execution report, facilitating debugging/analysis of the problem.

The components are categorized under the following functional areas:

- Administration Data
- Asset Management
- Configuration Management
- Work Management
- Cloud

Administration Data

Component	Description
W1- AssetAgeBktConfig	Used to create, update, read, or delete AssetAgeBktConfig in the WAM application.
	This component calls the W1- AssetAgeBktConfig business object using the Inbound Web Service.
W1- BasicActivityType	Used to create, update, read, or delete BasicActivityType in the WAM application.
	This component calls the W1- BasicActivityType business object using the Inbound Web Service.
W1- BIExtractParameters	Used to create, update, read, or delete BIExtractParameters in the WAM application.
	This component calls the W1- BIExtractParameters business object using the Inbound Web Service.
W1- ConfigType	Used to create, update, read, or delete ConfigType in the WAM application.
	This component calls the W1- ConfigType business object using the Inbound Web Service.
W1- OutboundActivityType	Used to create, update, read, or delete OutboundActivityType in the WAM application.
	This component calls the W1- OutboundActivityType business object using the Inbound Web Service.

Component	Description
W1- GeneralCommunicationType	Used to create, update, read, or delete GeneralCommunicationType in the WAM application.
	This component calls the W1- GeneralCommunicationType business object using the Inbound Web Service.
W1- AssetInstallAgeBktConfig	Used to create, update, read, or delete AssetInstallAgeBktConfig in the WAM application.
	This component calls the W1- AssetInstallAgeBktConfig business object using the Inbound Web Service.
W1- AssetInstoreAgeBktConfig	Used to create, update, read, or delete AssetInstoreAgeBktConfig in the WAM application.
	This component calls the W1- AssetInstoreAgeBktConfig business object using the Inbound Web Service.
W1- AssetSearchMasterConfig	Used to create, update, read, or delete AssetSearchMasterConfig in the WAM application.
	This component calls the W1- AssetSearchMasterConfig business object using the Inbound Web Service.

Asset Management

Component	Description
W1- Business	Used to create, update, read, or delete Business in the WAM application.
	This component calls the W1- Business business object using the Inbound Web Service.
W1- MDMAsset	Used to create, update, read, or delete MDMAsset in the WAM application.
	This component calls the W1- MDMAsset business object using the Inbound Web Service.
W1-MaintenanceSpecGeneral	Used to create, update, read, or delete MaintenanceSpecGeneral in the WAM application.
	This component calls the W1-MaintenanceSpecGeneral business object using the Inbound Web Service.

Component	Description
W1-AssetTypeConv	Used to create, update, read, or delete AssetTypeConv in the WAM application.
	This component calls the W1-AssetTypeConv business object using the Inbound Web Service.
W1-AssetDposHistInstallations	Used to create, update, read, or delete AssetDposHistInstallations in the WAM application
	This component calls the W1- AssetDposHistInstallations business object using the Inbound Web Service.
W1-SHInspectionGenrlWeighted	Used to create, update, read, or delete SHInspectionGenrlWeighted in the WAM application.
	This component calls the W1- SHInspectionGenrlWeighted business object using the Inbound Web Service.
W1- Person	Used to create, update, read, or delete Person in the WAM application.
	This component calls the W1- Person business object using the Inbound Web Service.
W1- SynchronizationAddContact	Used to create, update, read, or delete SynchronizationAddContact in the WAM application.
	This component calls the W1- SynchronizationAddContact business object using the Inbound Web Service.
W1- BasicTest	Used to create, update, read, or delete BasicTest in the WAM application.
	This component calls the W1- BasicTest business object using the Inbound Web Service.
W2-SmartTest	Used to create, update, read, or delete SmartTest in the WAM application.
	This component calls the W2- SmartTest business object using the Inbound Web Service.
W1-PeerSpecification	Used to create, update, read, or delete PeerSpecification in the WAM application.
	This component calls the W2- PeerSpecification business object using the Inbound Web Service.

Component	Description
W1- AssetCompCfgRpt	Used to create, update, read, or delete AssetCompCfgRpt in the WAM application.
	This component calls the W1- AssetCompCfgRpt business object using the Inbound Web Service.
W1- AssetCompCfgWO	Used to create, update, read, or delete AssetCompCfgWO in the WAM application.
	This component calls the W1- AssetCompCfgWO business object using the Inbound Web Service.
W1- AssetCompToAssetCfgRpt	Used to create, update, read, or delete AssetCompToAssetCfgRpt in the WAM application
	This component calls the W1- AssetCompToAssetCfgRpt business object using the Inbound Web Service.
W1- AssetCompToAssetCfgWO	Used to create, update, read, or delete AssetCompToAssetCfgWO in the WAM application
	This component calls the W1- AssetCompToAssetCfgWO business object using the Inbound Web Service.
W1- AssetCompToAssetCompCfgRpt	Used to create, update, read, or delete AssetCompToAssetCompCfgRpt in the WAM application.
	This component calls the W1- AssetCompToAssetCompCfgRpt business object using the Inbound Web Service.
W1- AssetCompToAssetCompCfgWO	Used to create, update, read, or delete AssetCompToAssetCompCfgWO in the WAM application.
	This component calls the W1- AssetCompToAssetCompCfgWO business object using the Inbound Web Service.
W1- AssetCompToAssetCompConfig	Used to create, update, read, or delete AssetCompToAssetCompConfig in the WAM application.
	This component calls the W1- AssetCompToAssetCompConfig business object using the Inbound Web Service.

Configuration Management

Component	Description
W1- AssetCompToAssetConfig	Used to create, update, read, or delete AssetCompToAssetConfig in the WAM application
	This component calls the W1- AssetCompToAssetConfig business object using the Inbound Web Service.
W1- AssetToAssetCfgRpt	Used to create, update, read, or delete AssetToAssetCfgRpt in the WAM application.
	This component calls the W1- AssetToAssetCfgRp business object using the Inbound Web Service.
W1- AssetToAssetCfgWO	Used to create, update, read, or delete AssetToAssetCfgWO in the WAM application.
	This component calls the W1- AssetToAssetCfgW0 business object using the Inbound Web Service.
W1- AssetToAssetCompCfgRpt	Used to create, update, read, or delete AssetToAssetCompCfgRpt in the WAM application
	This component calls the W1- AssetToAssetCompCfgRpt business object using th Inbound Web Service.
W1- AssetToAssetCompCfgWO	Used to create, update, read, or delete AssetToAssetCompCfgWO in the WAM application
	This component calls the W1- AssetToAssetCompCfgWO business object using the Inbound Web Service.
W1- AssetToAssetCompConfig	Used to create, update, read, or delete AssetToAssetCompConfig in the WAM application
	This component calls the W1- AssetToAssetCompConfig business object using the Inbound Web Service.
W1- AssetToAssetConfig	Used to create, update, read, or delete AssetToAssetConfig in the WAM application.
	This component calls the W1- AssetToAssetConfig business object using the Inbound Web Service.
W1- SingleAssetCfgRpt	Used to create, update, read, or delete SingleAssetCfgRpt in the WAM application.
	This component calls the W1- SingleAssetCfgRpt business object using the Inbound Web Service.
W1- SingleAssetCfgWO	Used to create, update, read, or delete SingleAssetCfgWO in the WAM application.
	This component calls the W1- SingleAssetCfgWO business object using the Inbound Web Service.

Component	Description
W1- SingleAssetConfig	Used to create, update, read, or delete SingleAssetConfig in the WAM application.
	This component calls the W1- SingleAssetConfig business object using the Inbound Web Service.
W1- AssetCompConfig	Used to create, update, read, or delete AssetCompConfig in the WAM application.
	This component calls the W1- AssetCompConfig business object using the Inbound Web Service.

Work Management

Component	Description
W1- ActivityComplInboundComm	Used to create, update, read, or delete ActivityComplInboundComm in the WAM application.
	This component calls the W1- ActivityComplInboundComm business object using the Inbound Web Service.
W1- AdHocActivityCore	Used to create, update, read, or delete AdHocActivityCore in the WAM application.
	This component calls the W1- AdHocActivityCore business object using the Inbound Web Service.
W1- AssetCriteriaActGenerator	Used to create, update, read, or delete AssetCriteriaActGenerator in the WAM application.
	This component calls the W1- AssetCriteriaActGenerator business object using the Inbound Web Service.
W1- AssetListActGenerator	Used to create, update, read, or delete AssetListActGenerator in the WAM application.
	This component calls the W1- AssetListActGenerator business object using the Inbound Web Service.
W1- BasicWorkOrder	Used to create, update, read, or delete BasicWorkOrder in the WAM application.
	This component calls the W1- BasicWorkOrder business object using the Inbound Web Service.

Component	Description
W1- CompnAssetListActGenerator	Used to create, update, read, or delete CompnAssetListActGenerator in the WAM application.
	This component calls the W1- CompnAssetListActGenerator business object using the Inbound Web Service.
W1- CompnCriteriaActGenerator	Used to create, update, read, or delete CompnCriteriaActGenerator in the WAM application.
	This component calls the W1- CompnCriteriaActGenerator business object using the Inbound Web Service.
W1- CreComActivityInboundComm	Used to create, update, read, or delete CreComActivityInboundComm in the WAM application.
	This component calls the W1- CreComActivityInboundComm business object using the Inbound Web Service.
W1- CreateActivityInboundComm	Used to create, update, read, or delete CreateActivityInboundComm in the WAM application.
	This component calls the W1- CreateActivityInboundComm business object using the Inbound Web Service.
W1- LocalActivityCore	Used to create, update, read, or delete LocalActivityCore in the WAM application.
	This component calls the W1- LocalActivityCore business object using the Inbound Web Service.
W1- NodeCriteriaActGenerator	Used to create, update, read, or delete NodeCriteriaActGenerator in the WAM application
	This component calls the W1- NodeCriteriaActGenerator business object using the Inbound Web Service.
W2-FirmwareCommandLocal	Used to create, update, read, or delete FirmwareCommandLocal in the WAM application.
	This component calls the W2- FirmwareCommandLocal business object using the Inbound Web Service.

Component	Description
W2-ACfgFirmwareUpgrade	Used to create, update, read, or delete ACfgFirmwareUpgrade in the WAM application.
	This component calls the W2- ACfgFirmwareUpgrade business object using the Inbound Web Service.
W2-ACCfgFirmwareUpgrade	Used to create, update, read, or delete ACCfgFirmwareUpgrade in the WAM application.
	This component calls the W2- ACCfgFirmwareUpgrade business object using the Inbound Web Service.
W2-ACACfgFirmwareUpgrade	Used to create, update, read, or delete ACACfgFirmwareUpgrade in the WAM application.
	This component calls the W2- ACACfgFirmwareUpgrade business object using the Inbound Web Service.
W2-ACACCfgFirmwareUpgrade	Used to create, update, read, or delete ACACCfgFirmwareUpgrade in the WAM application.
	This component calls the W2- ACACCfgFirmwareUpgrade business object using the Inbound Web Service.
W2-AACfgFirmwareUpgrade	Used to create, update, read, or delete AACfgFirmwareUpgrade in the WAM application.
	This component calls the W2- AACfgFirmwareUpgrade business object using the Inbound Web Service.
W2-AACCfgFirmwareUpgrade	Used to create, update, read, or delete AACCfgFirmwareUpgrade in the WAM application.
	This component calls the W2- AACCfgFirmwareUpgrade business object using the Inbound Web Service.
W1-WorkLocation	Used to create, update, read, or delete WorkLocation in the WAM application.
	This component calls the W1-WorkLocation business object using the Inbound Web Service.
W1- OutboundActivityCore	Used to create, update, read, or delete OutboundActivityCore in the WAM application.
	This component calls the W1- OutboundActivityCore business object using the Inbound Web Service.

Component	Description
W1- RTSVSCWOSQL	Used to retrieve/read ServiceSchedule Work Order against the ODM Work Order in the WAM application.
	This component calls the CM-RTSVSCWO business service using the ATW1RTSVSCWOSQL Inbound Web Service.

Cloud

Component	Description
W1-Lookup	Used to create, update, read, or delete Lookup in the WAM application.
	This component calls the W1-Lookup business object using the Inbound Web Service.
W1-InstallationOptions	Used to createInstallationOptions in the WAM application.
	This component calls the W1-InstallationOptions business object using the Inbound Web Service.

Appendix A

Inbound Web Services

The Oracle Utilities Work and Asset Management components are developed using Web services method, and these components require Inbound Web Services to be defined in the application.

This chapter includes the following:

- Pre-requisites
- List of Inbound Web Services

Pre-requisites

Before running the automation on Oracle Utilities Work and Asset Management, import the "W1-BundleImport" IWS flow into Oracle Utilities Work and Asset Management using Oracle Utilities Testing Accelerator. This imports all the necessary IWS required to automate flows in the Oracle Utilities Work and Asset Management environment.

Note: If the import process of the entire bundle is slow, break the bundle into parts and import.

For instructions to create, import, or search an Inbound Web Service, see the **Setting Up Inbound Web Services** appendix in *Oracle Utilities Testing Accelerator User's Guide for Cloud*.

List of Inbound Web Services

The list of Inbound Web Services provided to use with the delivered components and flows is as follows:

- ATW1AcceptLineCraft
- ATW1AcceptLineMaterial
- ATW1AccountingCalendar
- ATW1ActivityComplInboundComm
- ATW1ActivityCompletionEventType
- ATW1ActivityEquipRequirement
- ATW1ActivityLaborRequirement
- ATW1ActivityMaterialRequirement
- ATW1ActivityOtherRequirement
- ATW1AdHocActivityCore
- ATW1AmtBasedAppvlProf
- ATW1ApprovalRequest
- ATW1AssessmentClass
- ATW1AssessmentGroup
- ATW1AssetAgeBktConfig
- ATW1AssetCompCfgRpt
- ATW1AssetCompCfgWO
- ATW1AssetCompConfig
- ATW1AssetCompToAssetCfgRpt
- ATW1AssetCompToAssetCfgWO
- ATW1AssetCompToAssetCompCfgRpt
- ATW1AssetCompToAssetCompCfgWO
- ATW1AssetCompToAssetCompConfig
- ATW1AssetCompToAssetConfig

- ATW1AssetCompletionEventType
- ATW1AssetConditionScoreBuckets
- ATW1AssetCriteriaActGenerator
- ATW1AssetCriticalityBuckets
- ATW1AssetDocument
- ATW1AssetDposCmpEvtType
- ATW1AssetInstallAgeBktConfig
- ATW1AssetInstoreAgeBktConfig
- ATW1AssetListActGenerator
- ATW1AssetLoc
- ATW1AssetLocSpecTemplWorkOrder
- ATW1AssetLocationSpecificTemplateActivity
- ATW1AssetReplicationActivity
- ATW1AssetReplicationComplEvent
- ATW1AssetSearchMasterConfig
- ATW1AssetToAssetCfgRpt
- ATW1AssetToAssetCfgWO
- ATW1AssetToAssetCompCfgRpt
- ATW1AssetToAssetCompCfgWO
- ATW1AssetToAssetCompConfig
- ATW1AssetType
- ATW1AssetTypeAverageCost
- ATW1Assetloctype
- ATW1AssettoAssetconfig
- ATW1BCAccessList
- ATW1BCCraftLine
- ATW1BCEquipmentLine
- ATW1BCHeader
- ATW1BCHeaderIntegration
- ATW1BCOtherLine
- ATW1BCStockItemLine
- ATW1BIExtractParameters
- ATW1BOMGenStockItem
- ATW1BasicActivityType
- ATW1BasicTest
- ATW1BasicWorkOrder

- ATW1BillableRate
- ATW1Business
- ATW1BusinessUnit
- ATW1Buyer
- ATW1CalendarAnniversary
- ATW1CalendarInterval
- ATW1CalendarWarranty
- ATW1CalendarWarrantyTerm
- ATW1CapabilityType
- ATW1Circle
- ATW1Color
- ATW1CommodityCategory
- ATW1CommodityName
- ATW1CommodityType
- ATW1CommonShiftPlanTemplate
- ATW1CommunicationComponentSpec
- ATW1CommunicationRelaySpec
- ATW1CompnAssetListActGenerator
- ATW1CompnCriteriaActGenerator
- ATW1ComponentType
- ATW1ComponentTypeAverageCost
- ATW1ConfigType
- ATW1ContactType
- ATW1CostCategory
- ATW1CostCenter
- ATW1CostCenterExpenseCode
- ATW1Course
- ATW1Craft
- ATW1CraftPOLine
- ATW1CreActivityCmpEvt
- ATW1CreActivityPayCmpEvt
- ATW1CreAssetAttachCmpEvt
- ATW1CreAssetCmpEvt
- ATW1CreAssetDocumentCmpEvt
- ATW1CreAssetPayCmpEvt
- ATW1CreComActivityInboundComm

- ATW1CreLocationDocumentCmpEvt
- ATW1CreNodeAttachCmpEvt
- ATW1CreServiceHistoryAttCmpEvt
- ATW1CreServiceHistoryPayCmpEvt
- ATW1CreSvcHistCmpEvt
- ATW1CreWorkReqDocumentCmpEvt
- ATW1CreWorkRequestPayCmpEvt
- ATW1CreateActivityInboundComm
- ATW1Crew
- ATW1CrewShiftActivitySchedules
- ATW1CrewShiftTemplate
- ATW1CrewType
- ATW1CrewWithCraft
- ATW1DailySchedule
- ATW1DailyScheduleType
- ATW1DataAreaCmpEvtType
- ATW1DistributionCode
- ATW1DocAct
- ATW1DocAttachment
- ATW1DocCmplEvnt
- ATW1DocCmplEvntType
- ATW1DocUrl
- ATW1DocumentType
- ATW1Employee
- ATW1EmployeeType
- ATW1EquipForTemplateAct
- ATW1Equipment
- ATW1EquipmentPOLine
- ATW1EquipmentPRLine
- ATW1Expedite
- ATW1ExpenseCode
- ATW1FOB
- ATW1Factor
- ATW1FactorValue
- ATW1FailureComponent
- ATW1FailureMode

- ATW1FailureProfile
- ATW1FailureProfileFailureComp
- ATW1FailureProfileFailureMode
- ATW1FailureProfileFailureRepair
- ATW1FailureProfileFailureType
- ATW1FailureRepair
- ATW1FailureServiceHistory
- ATW1FailureType
- ATW1FinancialMasterConfig
- ATW1FinancialTransaction
- ATW1FirmwareSpecification
- ATW1FirmwareVersion
- ATW1Function
- ATW1FunctionType
- ATW1GaugeReadWithThresholdMeasType
- ATW1GeneralAssetLocation
- ATW1GeneralAssetLocationType
- ATW1GeneralCommunicationType
- ATW1GeneralCompletionEventType
- ATW1GeneralTemplateActivity
- ATW1GeneralTemplateWorkOrder
- ATW1IOSvcFleetAsset
- ATW1IOSvcITAsset
- ATW1IOSvcITComponent
- ATW1IOSvcInfrastructureAsset
- ATW1InOutSvcAsset
- ATW1InOutSvcComponent
- ATW1InOutofServiceGeneralAsset
- ATW1InOutofServiceGeneralComponent
- ATW1IndependentPartBOM
- ATW1InventoryAdjustmentIT
- ATW1InventoryAdjustmentLM
- ATW1InventoryAdjustmentRI
- ATW1InventoryMgmtMasterConfig
- ATW1InvoiceHeader
- ATW1InvoiceLine

- ATW1LaborEarningType
- ATW1LaborForTemplateAct
- ATW1Leave
- ATW1LeaveType
- ATW1Line
- ATW1LinearAssetLocation
- ATW1LinearAssetLocationType
- ATW1LocalActivityCore
- ATW1LocalActivityCoreWAM
- ATW1LocationDocument
- ATW1MDMAsset
- ATW1MTBFMTTRBuckets
- ATW1MaintenanceSchedule
- ATW1ManualMeterSpecification
- ATW1Manufacturer
- ATW1MassUpd
- ATW1MaterialRequestHeader
- ATW1MaterialRequestLine
- ATW1MaterialRequestTemplate
- ATW1MaterialReturnHeader
- ATW1MeasQuckEntryActivityType
- ATW1MeasurementUOM
- ATW1MeterReadWithRollOverMeasType
- ATW1MigrPlan
- ATW1MigrTransactionImport
- ATW1MigrationAssistantConfig
- ATW1MsrmtQuickEntryActivity
- ATW1MsrmtQuickEntryCmplEvt
- ATW1MsrmtQuickEntryCmplEvtType
- ATW1MsrmtTrackedGeneralAsset
- ATW1MsrtQuckEntryCmplEvtTyp
- ATW1NoAppvlRequiredProf
- ATW1NodeCriteriaActGenerator
- ATW1NonAmtBasedAppvlProf
- ATW1NumberOfCyclesOverdueBucket
- ATW1NumericGauge

- ATW1NumericMeter
- ATW1ODCEquipment
- ATW1OperationalReadingCmpEvt
- ATW1Organization
- ATW1OrganizationType
- ATW1Other
- ATW1OtherDirectCharges
- ATW1OtherDirectChargesOther
- ATW1OtherForTemplateAct
- ATW1OtherResourcePOLine
- ATW1OutboundActivityCore
- ATW1OutboundActivityType
- ATW1OvertimeType
- ATW1PIHeader
- ATW1POHeaderDocuments
- ATW1POHeaderIntegration
- ATW1POHeaderNotes
- ATW1POLineDocuments
- ATW1POLineIntegration
- ATW1POLineNotes
- ATW1PRCrLine
- ATW1PRCreBC
- ATW1PREqLine
- ATW1PRHeader
- ATW1PRORLine
- ATW1PRSILine
- ATW1PaymentTerm
- ATW1Person
- ATW1PersonWAM
- ATW1PhysicalInventoryCountLine
- ATW1PhysicalInventoryCountMaster
- ATW1PhysicalInventoryHeader
- ATW1Planner
- ATW1PlantAssetLocation
- ATW1PlantAssetLocationType
- ATW1Project

- ATW1ProjectCategory
- ATW1PurchaseCommodity
- ATW1PurchaseOrderHeader
- ATW1PurchaseRequisition
- ATW1PurchasingMasterConfig
- ATW1Question
- ATW1QuestionnaireSvcHist
- ATW1QuestionnaireSvcHistType
- ATW1RCMCalendarAnniversary
- ATW1RCMCalendarInterval
- ATW1RCMRuntimeAnniversary
- ATW1RCMRuntimeInterval
- ATW1RCMTrigPlndFailureInfoLITE
- ATW1RETCEVT
- ATW1ReadLogEntry
- ATW1ReadWithNoEvaluateMeasType
- ATW1ReceiptHeader
- ATW1ReceiptLine
- ATW1ReceiptLineCraft
- ATW1ReorderReview
- ATW1ReplicationComplEventType
- ATW1ResourceMgmntMasterConfig
- ATW1ResourceUOM
- ATW1RetrieveComplEvents
- ATW1ReturnLine
- ATW1RuntimeAnniversary
- ATW1RuntimeInterval
- ATW1RuntimeWarranty
- ATW1RuntimeWarrantyTerm
- ATW1SIDDirectPurchase
- ATW1SIDExpensedAtReceipt
- ATW1SIDInventory
- ATW1SIDSpecificDirectPurchase
- ATW1SIDSpecificLot
- ATW1SchedulePlan
- ATW1SchedulePlanType

- ATW1ScheduledActivityType
- ATW1ScheduledActivityTypeWAM
- ATW1ServHistFromActTypeCmplEvntType
- ATW1ServiceArea
- ATW1ServiceClass
- ATW1ServiceHistTypeCmpEvtType
- ATW1ServiceHistory
- ATW1ServiceHistoryType
- ATW1ServicePoint
- ATW1ShiftPlanTemplate
- ATW1SingleAssetCfgRpt
- ATW1SingleAssetCfgWO
- ATW1SingleAssetConfig
- ATW1SmartMeterSpecification
- ATW1SmartTest
- ATW1StandardNote
- ATW1StockItem
- ATW1StockItemPOLine
- ATW1StockTransaction
- ATW1StockTransferHeader
- ATW1StockTransferIssueLine
- ATW1StockTransferReceiptHeader
- ATW1StockTransferReceiptLine
- ATW1StockTransferRequestLine
- ATW1StorageLocation
- ATW1StorageLocationType
- ATW1StoreroomInventoryMgmt
- ATW1SubscriptionShiftPlanTemp
- ATW1SynchronizationAddContact
- ATW1TaxRateSchedule
- ATW1TemplateActivityLaborReq
- ATW1TemplateActivityMaterialReq
- ATW1TimePeriod
- ATW1Timesheet
- ATW1TimesheetDetail
- ATW1TrackedFleetSpecification

- ATW1TrackedGeneralAsset
- ATW1TrackedGeneralComponent
- ATW1TrackedGeneralSpecification
- ATW1TrackedITAsset
- ATW1TrackedITComponent
- ATW1TrackedITSpecification
- ATW1TrackedInfrastructureSpec
- ATW1TrnAssetCmpEvent
- ATW1UpdAssetPayCmpEvt
- ATW1UpdNodePayCmpEvt
- ATW1User
- ATW1Vehicle
- ATW1Vendor
- ATW1VendorLocation
- ATW1WAMBIExtractParameters
- ATW1WAssetAgeBuckets
- ATW1WAssetInstallAgeBuckets
- ATW1WorkCalendar
- ATW1WorkManagementMasterConfig
- ATW1WorkOrder
- ATW1WorkPriorityBuckets
- ATW1WorkReqComplEvtType
- ATW1WorkRequest
- ATW1WorkRequestComplEvt
- ATW2CommunicationComponent
- ATW2CommunicationRelay
- ATW2FirmwareVersion
- ATW2ManualMeter
- ATW2ManualMeterSpecification
- ATW2ServicePoint
- ATW2SmartMeter
- ATW2SmartMeterSpecification
- ATW1READASSETLOCID
- ATW1READCONTACT
- ATW1READSRVHSTID
- ATW1ActivityReconciliation

- ATW1ARSQL
- ATW1BOMGENSISQL
- ATW1CMPOHSQL
- ATW1ConstructionLocation
- ATW1ConstructionWorkActivity
- ATW1ConstructionWorkOrder
- ATW1ConstrWorkActivityType
- ATW1ContractorBid
- ATW1ContractorBidNotes
- ATW1ContractorBidRefAttachments
- ATW1CrewTypeCUEquipmentProfile
- ATW1CrewTypeCULaborProfile
- ATW1CrewTypeCUProfile
- ATW1CU
- ATW1CUCategory
- ATW1CULaborAndEquipment
- ATW1CUMaterialResources
- ATW1CUMaterialsForRemoval
- ATW1CUNotes
- ATW1CURefAttachments
- ATW1CUSetNotes
- ATW1CUSET
- ATW1CUSetRefAttachments
- ATW1CUUsage
- ATW1RTARID
- ATW1DeleteGeneralProcessRecord
- ATW1DesignElement
- ATW1DesignElementCU
- ATW1DesignElementItems
- ATW1EquipmentGroup
- ATW1FTSQL
- ATW1NUMGAUGESQL
- ATW1NUMMETERSQL
- ATW1Overhead
- ATW1PropUnit
- ATW1PropUnitBundlingAddBO

- ATW1PropUnitPhysicalBO
- ATW1RETCLCUCC
- ATW1RETCUHIER
- ATW1RETCURESO
- ATW1RETDEHIER
- ATW1RETREFCU
- ATW1RETREFDCU
- ATW1RETWDDE
- ATW1RNCACTRRQ
- ATW1RRSQL
- ATW1RSTITAUPR
- ATW1RTACONLAS
- ATW1RTACTACGL
- ATW1RTACTACRC
- ATW1RTACTRCON
- ATW1RTCBASTPU
- ATW1RTCCCUUSG
- ATW1RTCNASTPU
- ATW1RTCONLACU
- ATW1RTCRACTTY
- ATW1RTCUSTCU
- ATW1RTEASTISD
- ATW1RTNFODCDT
- ATW1RTNFTSDTL
- ATW1RTNFWOACT
- ATW1RTPRCPAST
- ATW1RTVLTASTY
- ATW1SVCHSTWAMSQL
- ATW1WDRefAttachments
- ATW1WorkDesign
- ATW1WorkDesignNotes
- ATW1AcceptLineSQL
- ATW1DTOHCST
- ATW1IDTOHCST
- ATW1RTSVSCWOSQL
- ATF1Lookup

- ATF1InstallationOptions
- ATW1WOActivityActiveOutboundMsg
- ATW1WOActivityFinalOutboundMsg
- ATW1WorkCategory
- ATW1WorkCategoryBundlingAddBO
- ATW1WorkCategoryPhysicalBO
- ATW1WorkClass
- ATW1WorkClassBundlingAddBO
- ATW1WorkClassPhysicalBO
- ATW1ServiceCondition
- ATW1ActivityGenerator
- ATW1CUAccessory
- ATW1CUFunction
- ATW1ActivityChecklist
- ATW1ChecklistType
- ATW1ComplianceCategory
- ATW1ComplianceType
- ATW1CorrectiveComplianceType
- ATW1Fact
- ATW1OnlineLoaderReq
- ATW1OnlineLoaderRequestType
- ATW1CrAnyServiceHistoryCmplEvt
- ATW1GenericAttachmentLite
- ATW2SmartMeterConfiguration
- ATW2SmartMeter
- ATW2SiteLocation
- ATW2ServicePointInstruction
- ATW2ManualMeterConfiguration
- ATW2CommunicationComponentCfg
- ATW1WAMToGISSyncMapping
- ATW1TransferShippingMemo
- ATW1TrackedStockShippingLine
- ATW1StockShippingLine
- ATW1Specification
- ATW1SiteLocation
- ATW1SOMActivityType

- ATW1SOMActivity
- ATW1ReturnShippingMemo
- ATW1ResetAssetConditionRatingSH
- ATW1ReplaceAssetOutbound
- ATW1ReplaceAssetLocal
- ATW1RepairShippingMemo
- ATW1ReceiptIntegInbound
- ATW1PlannerWOSummary
- ATW1PeerSpecification
- ATW1LotStockShippingLine
- ATW1MaterialIssueLine
- ATW1Item
- ATW1ItemSpecification
- ATW1GeneralShippingMemo
- ATW1Document
- ATW1CrewWOSummary
- ATW1Adjustment
- ATW1AdjustmentType
- ATW1BatchLoaderRequestType
- ATW1AccessGroupTables
- ATW1AssetDisposition
- ATW1ERPIntegrationMasterConfig
- ATW1GeneralProcess
- ATW1HCMIntegrationMasterConfig
- ATW1InterfaceTSDInboundComm
- ATW1LeaveInt
- ATW1OngoingSyncRequestCostCtr
- ATW1OngoingSyncRequestEmployee
- ATW1OngoingSyncRequestAssetNode
- ATW1InspectionTypeDeficiency
- ATW1InspectionTypePercentOfNew
- ATW1ResetAssetConditionRatinSHT
- ATW1ItemServicePoint
- ATW1OngoingSyncRequestStockItem
- ATW1PurchaseOrderIntegInbound
- ATW1ItemConfiguration

- ATW1TimShtQuickEntryCmplEvtType
- ATW1Timekeeper
- ATW1TimesheetQuickEntryActivity
- ATW1TimeSheetQuickEntryCmplEvt
- ATW1CMWRWORKDUP
- ATW1RetEmpAvailTime
- ATW1AssetDownTime
- ATW1GenMaterialDisposition
- ATW1InspectionDeficiency
- ATW1InspectionPercentOfNew
- ATW1MaintenanceManager
- ATW1MaintenanceEvent
- ATW1RTAORID
- ATW1RTAERID
- ATW1RTALRID
- ATW1RTAMRID
- ATW1OngoingSyncRequestStockItemByExternalId
- ATW1SEARCHEMPBYEXTID
- ATW1TSDBYACTID
- ATW1RETTSTPEM
- ATW1RETTSDET
- ATW1RETINCOMM
- ATW1RETSHACT
- ATW1RetrieveComplEventsDtl
- ATW1CMStockItemInformation
- ATW1CMStockItemIdentifier
- ATW1CMFieldActivityIdentifier
- ATW1CMFieldActivityWorkWindow
- ATW1CMFieldActivityLocation
- ATW1CMFieldActivityInformation
- ATW1CMPermitByInfo
- ATW1CMPermitByIdentifier
- ATW1CMCrewShiftByServiceInfo
- ATW1CMCrewShiftByCrewInfo
- ATW1CMCrewShiftByIndentifier
- ATW1CMCrewShiftBySchdPlanInfo

- ATW1CMChangeReqByInfo
- ATW1CMChangeReqByRelatedObj
- ATW1CMChangeReqByIdentifier
- ATW1CMActivityGenByInfo
- ATW1CMActivityGenByIdentifier
- ATW1CMActivityGenByTemplateInfo
- ATW1CMActivityGenBySrvSchdInfo
- ATW1CMRcvAllnPartial
- ATW1CMAssetInformation
- ATW1CMAssetIdentifier
- ATW1CMAssetDisposition
- ATW1CMAssetSpecification
- ATW1CMEmployeeInformation
- ATW1CMInstallDate
- ATW1CMAssetMaintenanceSpecification
- ATW1CMAssetAttribute
- ATW1PRPOHSQL
- W1-IntODCDtl
- W1-IntTMSDtl
- W1-CreateMobileWorkOrder
- W1-AssetComponentHistory
- ATW1CMCopyNRebalanceActAstList
- ATW1AssetComponentHistory
- ATW1CMAssetLocationByAssetLocationInformation
- ATW1CMAssetLocationByAssetLocationIdentifier
- ATW1CMAssetLocationByContactName
- ATW1CMAssetLocationByLatitudeandLongitude
- ATW1CMAssetLocationBySystem
- ATW1CMStockItemDetailByStockItemDetailInfo
- ATW1CMStockItemDetailByStockItemDetailID
- ATW1CMStockItemDetailByStockItemInfo
- ATW1CMBlanketSearchByBlanketContractHeaderInfo
- ATW1CMBlanketSearchByBlanketContractHeaderID
- ATW1CMBlanketSearchByBlanketContractHeaderResourceType
- ATW1CMRETPOLINEID
- ATW1CMRETPRLINEID

- ATW1CMSCHEDULEDCREWSHIFTBYACTIVITYID
- ATW1CMWorkActivityByMaintScheduleTrigger
- ATW1CMPOHeaderInfo
- ATW1CMPOLineInfo
- ATW1CMPOHeaderId
- ATW1CMPOByWorkOrder
- ATW1CMPRByHeaderInfo
- ATW1CMPRByLineInfo
- ATW1CMPRById
- ATW1CMPRByWOInfo
- ATW1CMMaterialRequestHeaderInformation
- ATW1CMMaterialRequestHeaderID
- ATW1CMInvoiceHeaderInformation
- ATW1CMInvoiceHeaderIdentifier
- ATW1CMInvoiceLineInformation
- ATW1CMShippingMemoSearchByShippingMemoInfo
- ATW1CMAssetQuery
- ATW1CMShippingMemoByShippingMemoID
- ATW1CMActivityMaterialUsage
- ATW1CMRETCOMIDSQL
- ATW1CMBCLNS
- ATW1CrePOFrBC
- ATW1CrePORev
- ATW1TmplConstructionWorkOrder
- ATW1TmplConstructionActivity
- ATGetWOFrmAssetId
- ATW1RetAsCstCatSum
- ATW1CommonWoActCostCalc
- ATW1AddMODocument
- ATW1DeleteMODocument
- ATW1RETREFATT

Appendix B

Identifying Fields For a Web Service Request

The requisite fields need to be filled up with data in order to map the value on a given schema.

Example: When a person is added online, only the field description is shown, but the exact field mapping is hidden from the user.

Following are the methods you can use to identify fields for a web service request and add data in those fields:

- Debug Mode in the Application
- IE Development Tool Bar
- SOAP UI

Debug Mode in the Application

The debug mode enables users to check the field mapping on a given maintenance page. This is actually the easiest among the different possible ways; however some clients may have system restriction (such as access restriction) on using debug mode.

To enter test data in the requisite fields using the debug method:

- 1. Login to the Oracle Utilities Work and Asset Management application in the 'debug' mode.
- 2. Before clicking the Debug mode switch ensure to navigate first to the target page.

Example: Person maintenance page


Bookmark	🕘 Debug co 🗖 🗖 💌 🗮	🖌 Favorite Links
Doonnark	https://slc08gbm.us.oracle.	Account
	Client Data	Payment Event
Customer	Server Data	Person
	Trace Time	Bill
1	Grid display time 📃 Debug List info 📃	Service Agreement
	Debug Filter	Meter
	Trace All	Batch Job Submission +
	Trace Output	XAI Submission
	Trace SQL Parameters Program Start	Current Context
	Program End	Switch Language
	Program buffers 📃	Switch To
	Flush UI page cache	QA Test Language 👻
		Refresh
		Alerts
		Applicable Campaigns

3. Perform the required action and click Save.

			itart Debug	Stop Debu	Show Trace	Clear	Trace	Log Er	ntries 200	Show U	ser Log	Validate	On DB	Global D	ebug 🔽
Person											Во	okmark	Clear	Save	Refres
Main Corresp Person Informatio		ce Inf	0 Characteris	stics Pers	ons Person Po	rtal						Person	ID 🔳		0
^p erson/Business	Pe	erson	✓ Life Su	upport / Sen:	Nor	ne 💌							1		
			Name Type		Person Name										
	+	Û	Primary		Sanity,48173										
			Direct Text			Direction			-	Divers 5					
erson Phones	+	Û	Phone Type			Phone N	umber		Extension	Phone Fo	ormat				
erson Phones	+	1	Phone Type	ing Pe			umber	Contact Inf			ermat	Form	nat	Primary	Do No
'erson Phones	+			ing Pe	rson Contact Type		umber	Contact Inf				Form	nat I	Primary	Do No
Person Phones	+			ing Pe	rson Contact Type			Contact Inf				Form	nat		
				ing Pé								Form	nat I		Do No


For example: The figure below shows adding a person (person name, person phone, person contacts, Person IDs, etc)

The schema window showing the populated values is displayed.

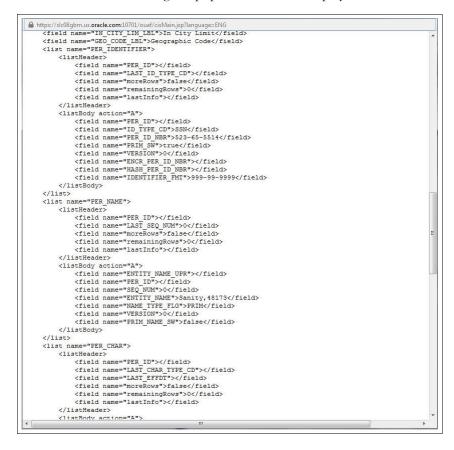

4. Navigate to the Business Object or Business Service look up window for the requisite field.

For example: In the figure below, ENTITY_NAME is named as entityName.

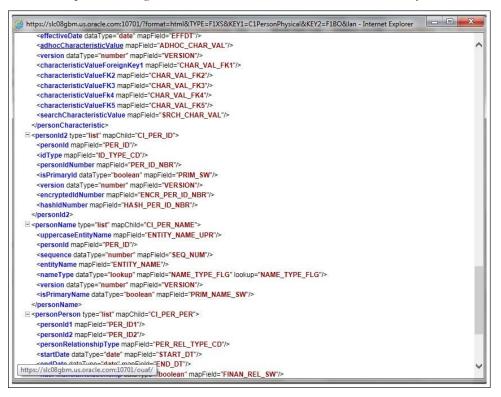

5. In the flow, search for the requisite field and enter the component test data.

WS-SETXMLLISTELEMENT	uppercaseEntityName	
WS-SETXMLLISTELEMENT	personId	
WS-SETXMLLISTELEMENT	sequence	
WS-SETXMLLISTELEMENT	entityName	Sanity,UserTesting3
WS-SETXMLLISTELEMENT	nameType	PRIM
WS-SETXMLLISTELEMENT	version	
WS-SETXMLLISTELEMENT	isPrimaryName	

6. Click **Save** to save the test data.


IE Development Tool Bar

The IE Development tool bar, available in IE11, enables users to inspect the page and its field mapping. It is on a 1:1 basis, meaning one inspect = one field.

To enter test data in the requisite fields using the IE Development tool bar, follow these steps:

- 1. Login to Oracle Utilities Work and Asset Management using Internet Explorer 11.
- 2. Navigate to the page where the requisite field needs to be updated with data.

For example: The figure below shows the Account page where the **Characteristic Value** field on the **Characteristics** tab needs to be updated.

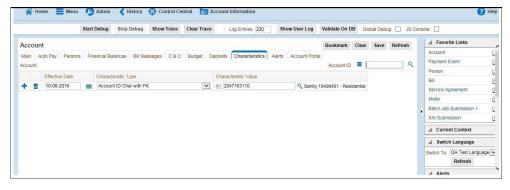

3. Press **F12**. The browser displays the F12 developer tools that help in building and debugging web pages.

5	Start Debug Stop De	bug Show Trace Clear Trace	Log Entries 200 Sho	w User Log Validate On I	DB Global Det	ug 🗌 JS Co	onsole
count				Bookmark	Clear Save	Refresh	Favorite Links
in Auto Pay Persons	Financial Balances	Bill Messages C & C Budget D	Deposits Characteristics Alerts	Account Portal			Account
ount		an medelages i o a o i balager i b		Account IE		Q	Payment Event
			Observation of the Markow				Person
Effective Date	Characteristic Type		Characteristic Value				Bill
10-06-2016	Account ID Char v	vith FK	2047163110	Q Sanity, 19498481 - Res	sidential		Service Agreement
							Meter
							Batch Job Submission +
							XAI Submission
							Current Context
							Current Context Switch Language
							Switch Language
							-
DOM Explorer Car	ssole Debugger	Network UI Responsiveness	Profiler Memory Em	ulation			Switch Language Switch To OA Test Lang Refresh Alerts
DOCTYPE html PUBLIC *		Network UI Responsiveness 1 Transitional//EM Thttp://www		ulation	Styles	Computed	✓ Switch Language Switch To QA Test Lang Refresh ✓ Alerts ✓ ↓ * Edge ② ?
DOCTYPE html PUBLIC *	-//W3C//DTD HTML 4.0	1 Transitional//EN" "http://www		ulation	▲ Styles	Computed	Switch Language Switch To QA Test Lang Refresh Alerts Find (Ctrl+F)
DOCTYPE html PUBLIC *-	-//W3C//DTD HTML 4.0			ulation	Styles	Computed	Switch Language Switch To QA Test Lang Refresh Alerts Find (Ctrl+F)
DOCTYPE html PUBLIC *-	-//W3C//DTD HTML 4.0	1 Transitional//EN" "http://www		ulation	Styles	Computed	Switch Language Switch To QA Test Lang Refresh Alerts Find (Ctrl+F)
DOCTYPE html PUBLIC *	-//W3C//DTD HTML 4.0	1 Transitional//EN" "http://www * 11 rights reserved. *		ulation	Styles	Computed	Switch Language Switch To QA Test Lang Refresh Alerts Find (Ctrl+F)
DOCTYPE html PUBLIC *	-//W3C//DTD HTML 4.0	1 Transitional//EN" "http://www		ulation	Styles	Computed	Switch Language Switch To QA Test Lang Refresh Alerts Find (Ctrl+F)
DOCTYPE html PUBLIC *	-//W3C//DTD HTML 4.0	1 Transitional//EH" "http://www ll rights reserved.		ulation	▲ Styles	Computed	Switch Language Switch To QA Test Lang Refresh Alerts Find (Ctrl+F)
DOCTYPE html PUBLIC * * Copyright (c) 20 * #85E5* REVISION-INFO 5	-//W3C//DTD HTML 4.0	1 Transitional//EH" "http://www ll rights reserved.		ulation	Styles	Computed	Switch Language Switch To QA Test Lang Refresh Alerts Find (Ctrl+F)
DOCTYPE html PUBLIC *	-//W3C//DTD HTML 4.0	1 Transitional//EH" "http://www ll rights reserved.		ulation	Styles	Computed	Switch Language Switch To QA Test Lang Refresh Alerts Find (Ctrl+F)
DOCTYPE html PUBLIC * Copyright (c) 20 BSES* REVISION-INFO S SDateTimeS	-//W3C//DTD HTML 4.0 0000, 2007, Dracle. A	1 Transitional//EH" "http://www ll rights reserved.		ulation	Styles	Computed	Switch Language Switch To QA Test Lang Refresh Alerts Find (Ctrl+F)

4. On the F12 tools menu, click the **DOM Explorer** tab, and then click the **Select** element icon.

St	rt Debug Stop E	lebug Show Tra	ace Clear Trac	Log Entries 21	00 Show User Lo	Validate On D	Giobart		VUIISUIB L	_	
Account						Bookmark	Clear Sa	ve Refresh		Favorite Links	
Auto Pay Persons	inancial Balances	Rill Messages	& C Budget	Deposits Characterist	ics Alerts Account F	Portal			Acc	count	
count		cia motodyce i i	o o l oogot			Account ID	= 1	Q	Pay	ment Event	
Effective Date	Characteristic Ty			Characteristic Value					Per	son	
			~		0.0				Bill		
10-00-2010	Account ID Cha	WITTER	v	2047103110	Q Sa	nity,19498481 - Resi	oential		Ser	vice Agreement	
									Me	ter	
									Bat	ch Job Submission +	
									XA	I Submission	
									4	Current Context	
									4	Switch Language	
											120
										ch To QA Test Lang	uag
									Swit	ch To QA Test Lang Refresh	uag
									Swit	ch To QA Test Lang	
DOM Septement	Debugger	Natuork		- Drofiler Mar	many Emulation				Swith	ch To QA Test Lang Refresh Alerts	>
	ole Debugger	Network	UI Responsiveness	: Profiler Men	nory Emulation				Swith	ch To QA Test Lang Refresh Alerts	>
	ole Debugger	Network	UI Responsiveness	; Profiler Mer	nory Emulation	_			Swith	ch To QA Test Lang Refresh Alerts	>
<idoctype "-="" <="" html="" public="" td=""><td></td><td></td><td></td><td></td><td></td><td></td><td>Styles</td><td>Computed</td><td>Swith</td><td>ch To QA Test Lang Refresh Alerts</td><td>></td></idoctype>							Styles	Computed	Swith	ch To QA Test Lang Refresh Alerts	>
<pre><idoctype "-="" <!<="" html="" pre="" public=""></idoctype></pre>	/W3C//DTD HTML 4.	01 Transitional,	//EN" "http://ww	ww.w3.org/TR/html4/le			Styles	Computed	Swit	Ch To QA Test Lang Refresh Alerts C * Edge P ? Find (Ctrl+F)	>
<idoctype "-="" <="" html="" public="" td=""><td>/W3C//DTD HTML 4.</td><td>01 Transitional,</td><td>//EN" "http://ww</td><td>ww.w3.org/TR/html4/le</td><td></td><td></td><td>Styles</td><td>Computed</td><td>Swit</td><td>Ch To QA Test Lang Refresh Alerts C * Edge P ? Find (Ctrl+F)</td><td>></td></idoctype>	/W3C//DTD HTML 4.	01 Transitional,	//EN" "http://ww	ww.w3.org/TR/html4/le			Styles	Computed	Swit	Ch To QA Test Lang Refresh Alerts C * Edge P ? Find (Ctrl+F)	>
<idoctype "-="" <="" html="" public="" td=""><td>/W3C//DTD HTML 4.</td><td>01 Transitional,</td><td>//EN" "http://w</td><td>ww.w3.org/TR/html4/le</td><td></td><td>í</td><td>Styles</td><td>Computed</td><td>Swit</td><td>Ch To QA Test Lang Refresh Alerts C * Edge P ? Find (Ctrl+F)</td><td>></td></idoctype>	/W3C//DTD HTML 4.	01 Transitional,	//EN" "http://w	ww.w3.org/TR/html4/le		í	Styles	Computed	Swit	Ch To QA Test Lang Refresh Alerts C * Edge P ? Find (Ctrl+F)	>
<pre><loctrype "-="" *<="" <!="" html="" pre="" public=""></loctrype></pre>	/W3C//DTD HTML 4.	01 Transitional,	//EN" "http://w	ww.w3.org/TR/html4/le		Í	Styles	Computed	Swit	Ch To QA Test Lang Refresh Alerts C * Edge ? ? Find (Ctrl+F)	>
<pre></pre>	/W3C//DTD HTML 4.	01 Transitional,	//EN" "http://ww ****************** rved. * *	ww.w3.org/TR/html4/le		,	Styles	Computed	Swit	Ch To QA Test Lang Refresh Alerts C * Edge ? ? Find (Ctrl+F)	>
<pre></pre> <pre><</pre>	/W3C//DTD HTML 4.	01 Transitional,	//EN" "http://w * rved. * *	ww.w3.org/TR/html4/le			Styles	Computed	Swit	Ch To QA Test Lang Refresh Alerts C * Edge ? ? Find (Ctrl+F)	>
<pre>CloctryPE html PUBLIC "/ <l (c)="" 200="" 5ta="" <="" copyright="" pre="" revision-info="" s#b5es*=""></l></pre>	/W3C//DTD HTML 4.	01 Transitional,	//EN" "http://w * rved. * *	ww.w3.org/TR/html4/le			Styles	Computed	Swit	Ch To QA Test Lang Refresh Alerts C * Edge ? ? Find (Ctrl+F)	>
<pre></pre> <idctype *-="" <="" html="" p="" public=""> Copyright (c) 200 \$#8555* REVISION-INFO State SobetrimeS</idctype>	/W3C//DTD HTML 4.	01 Transitional,	//EN" "http://w * rved. * *	ww.w3.org/TR/html4/le			Styles	Computed	Swit	Ch To QA Test Lang Refresh Alerts C * Edge ? ? Find (Ctrl+F)	>
<pre>CloctryPE html PUBLIC "/ <l (c)="" 200="" 5ta="" <="" copyright="" pre="" revision-info="" s#b5es*=""></l></pre>	/W3C//DTD HTML 4.	01 Transitional,	//EN" "http://w * rved. * *	ww.w3.org/TR/html4/le			Styles	Computed	Swit	Ch To QA Test Lang Refresh Alerts C * Edge ? ? Find (Ctrl+F)	>

5. On the application page, click the field for which you need to enter the data. The DOM Explorer shows the HTML for the selected field.

For example: Click the **Characteristic Value** field on the **Account** page. The DOM Explorer shows the **ID** of that field.

A Home Menu	🤦 Admin 🔇 History 😲 Co	ntrol Central 🛛 🦳 Account Information		P He
	Start Debug Stop Debug Show	Trace Clear Trace Log Entries 200 Sho	w User Log Validate On DB Global Debug 🗌 JS C	console
ccount tain Auto Pay Person: ccount	Financial Balances Bill Messages	C & C Budget Deposits Characteristics Alerts	Bookmark Clear Save Refresh Account Portal Account ID	Favorite Links Account Payment Event
Effective Date	Characteristic Type	Characteristic Value		Person
		V = D47163110	Q. Sanity,19499481 - Residential	Ovrive/spectrum Meter Batch Job Submission + XAl Submission Current Context Switch Language Switch To: (CA Test Language Refresh A Aterts
	onsole Debugger Network YddaDwsion table#datsTable tbc	UI Responsences Profile Memory Em clinput mean-IACT_CHAR:85CHAR_VAL_PL1 t forms' iss-MACT_CHAR:85CHAR_VAL_PL1 tri iss-MACT_CHAR:85CHAR_VAL_PL1 tri issel topy D_C_CHAR:MSCHAR_VAL_PL1 tri issel topy D_C_CHAR:MSCHAR_VAL_PL1 tri (event, document)' ontDullck'main.ontn (event, document)' ontDullck'main.ontn (event, document)' ontDullck'main.ontn (event, document)' ontDullck'main.ontn document'' ontDullck'main.ontn document'' ontDullck'main.ontn size=330" maxIength=50" value=32074331 size=330" maxIength=50" value=32074331 size=130" maxIength=50" value=3207431 size=130" value=3200 value=3207431 size=130" value=3200 valu	bay: inine;" main.onfoputtextilick batterstock(event)" scattock(event)" scattock(event)" scattock(event)" scattock(event)" scattock(event)" scattock(event)" scattock(event)" scattock(event)	. #333333

6. On the object lookup window, search the requisite field.

For example: Search for CHAR_VAL_FK1.

<version datatype="number" mapfield="VERSION"></version>	
<pre><accountautopay mapchild="CI_ACCT_APAY" type="list"></accountautopay></pre>	
<accountautopayid mapfield="ACCT_APAY_ID"></accountautopayid>	
<accountid mapfield="ACCT_ID"></accountid>	
<startdate datatype="date" mapfield="START_DT"></startdate>	
<enddate datatype="date" mapfield="END_DT"></enddate>	
<autopaysource mapfield="APAY_SRC_CD"></autopaysource>	
<externalaccountid mapfield="EXT_ACCT_ID"></externalaccountid>	
<expiredate datatype="date" mapfield="EXPIRE_DT"></expiredate>	
<entityname mapfield="ENTITY_NAME"></entityname>	
<comments mapfield="COMMENTS"></comments>	
<version datatype="number" mapfield="VERSION"></version>	
<autopaymaxwithdrawalamount datatype="money" mapfield="APAY_MAX_WDRWL_AMT"></autopaymaxwithdrawalamount>	
<autopaymethod datatype="lookup" lookup="APAY_METHOD_FLG" mapfield="APAY_METHOD_FLG"></autopaymethod>	
<encryptedexternalaccountid mapfield="ENCR_EXT_ACCT_ID"></encryptedexternalaccountid>	
sccountCharacteristic type="list" mapChild="CI_ACCT_CHAR">	
<accountid mapfield="ACCT_ID"></accountid>	
<characteristictype mapfield="CHAR_TYPE_CD"></characteristictype>	
<effectivedate datatype="date" mapfield="EFFDT"></effectivedate>	
<characteristicvalue mapfield="CHAR_VAL"></characteristicvalue>	
<adhoccharacteristicvalue mapfield="ADHOC_CHAR_VAL"></adhoccharacteristicvalue>	
<version datatype="number" mapfield="VERSION"></version>	
<characteristicvalueforeignkey1 mapfield="CHAR_VAL_FK1"></characteristicvalueforeignkey1>	
<characteristicvaluefk2 mapfield="CHAR_VAL_FK2"></characteristicvaluefk2>	
<characteristicvaluefk3 mapfield="CHAR_VAL_FK3"></characteristicvaluefk3>	
<characteristicvaluefk4 mapfield="CHAR_VAL_FK4"></characteristicvaluefk4>	
<characteristicvaluefk5 mapfield="CHAR_VAL_FK5"></characteristicvaluefk5>	
<searchcharacteristicvalue mapfield="SRCH_CHAR_VAL"></searchcharacteristicvalue>	
 ⊟ <accountmessage mapchild="CL ACCT MSG" type="list"></accountmessage>	
<accountidessage maponic="CLACC1_MSG" type="list"> <accountid mapfield="ACCT_ID"></accountid></accountidessage>	

7. In the flow, add the necessary data into the field.

WS-SETXMLLISTELEMENT	characteristicValue	2047163110
WS-SETXMLLISTELEMENT	adhocCharacteristic	
WS-SETXMLLISTELEMENT	version	
WS-SETXMLLISTELEMENT	characteristicValueF	
WS-SETXMLLISTELEMENT	characteristicValueFK2	
WS-SETXMLLISTELEMENT	characteristicValueFK3	
WS-SETXMLLISTELEMENT	characteristicValueFk4	
WS-SETXMLLISTELEMENT	characteristicValueFK5	

8. Click **Save** to save the data.

SOAP UI

This method is an alternative to the other methods mentioned above if the user is familiar with SOAP UI.


To identify the requisite fields using SOAP UI:

- 1. Login to the application.
- 2. Navigate to the page where the test data has to added. Add the data in the respective fields.

For example: The figure below shows the **Case** page where **Characteristics Type** and **Characteristic Value** are added in the **Characteristics** section.

_	Start De	stop Debug	Show Trace	Clear Trace	Log Entries 200	Show User Log	Validate On DB	Global Debug	J
Case						Bookmark	Duplicate C	lear Save Refr	esh
Main C	Case Portal Log								
Case Info	Open - STATUS A, TEST (04-2010 06:30PM	ASE INFO, 2347 Day	s Old, Madera,Ma	rk, Created: 05-			Case	ID 4331850301	
Case Type		CASE I	NFO						
Status	STATUS A								
Date/Time	Opened 05-04-2010 06:30	PM							
Actions	STATUS B								
	sample test					~ /			
Comment						\sim			
Person	7182282498	Smith.Dan							
	0129423474	Smith,Dan - R	esidential						
Premise	7974676471			43212 LISA An	artment, 7974676471				
		Madera, Mark	an manciaco, or,	40212, 00A, Ap	arement, 7374070471				
Responsib		Wadera, Wark							
Contact In		282498 🔍 Sr	nith,Dan						
0	tact Person = 710.		niti,Dan						
66.0352									
66.0352	ferred Contact Method	~							
Pref	ferred Contact Method	~				1	1		
Pref		×	84 - 947 ¹						
Prefi		×	>						
Prefi Cont Calit	tact Instructions		Extensio	n	Phone Format	ţ			
Prefi Cont Calit Calit	tact Instructions back Phone Type back Phone Number			n	Phone Format				
Prefi Cont Calit Calit	tact Instructions back Phone Type back Phone Number	Characteristic Value		n	Phone Format	(
Prefi Cont Calit Calit	tact Instructions back Phone Type back Phone Number istics		Extensio	n	Phone Format				
Prefi Cont Calit Calit Characteri	tact Instructions back Phone Type back Phone Number istics Characteristic Type	Characteristic Value	Extensio	n	Phone Format	}			

3. On the SOAP UI, perform a Read using the data that has been added on the **Case** page (in step 2). The result is displayed in the right pane.

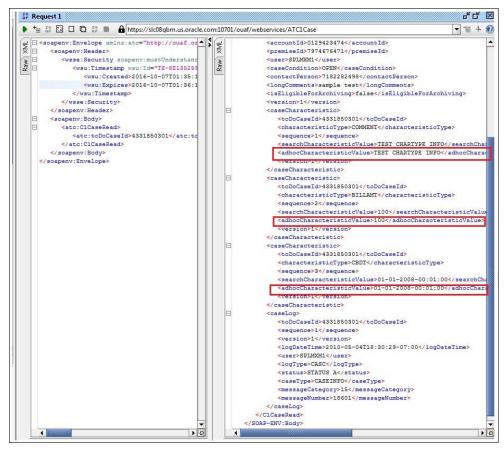

4. Copy the values and paste them in the respective fields on the flow.

For example: COMMENT and TEST CHARTYPE INFO are the values for characteristicType and adhocCharacteristicValue fields.

Note: Not all fields populated on the SOAP response needs to be populated on the flow. (For example: version, info, other type of description, etc).

WS-SETXMLLISTELEMENT	Add	⊯ caseCharacteristic	
WS-SETXMLLISTELEMENT		toDoCaseld	
WS-SETXMLLISTELEMENT		characteristicType	
WS-SETXMLLISTELEMENT		sequence	1
WS-SETXMLLISTELEMENT		searchCharacteristicValue	
WS-SETXMLLISTELEMENT		characteristicValueFK5	
WS-SETXMLLISTELEMENT		characteristicValueFk4	
WS-SETXMLLISTELEMENT		characteristicValueFK3	
WS-SETXMLLISTELEMENT		characteristicValueFK2	
WS-SETXMLLISTELEMENT		characteristicValueForei	
WS-SETXMLLISTELEMENT		adhocCharacteristicValue	E TEST CHARTYPE INF
WS-SETXMLLISTELEMENT		characteristicValue	
WS-SETXMULISTELEMENT		version	

5. Click **Save** to save the data.