

Oracle® Banking Corporate Lending Multi-Tenant Patch-set Deployment



Release 14.7.4.0.0

G12985-01

May 2024

The Oracle logo, consisting of the word "ORACLE" in white, uppercase, sans-serif font, centered within a solid red square.

ORACLE®

Oracle Banking Corporate Lending Multi-Tenant Patch-set Deployment, Release 14.7.4.0.0

G12985-01

Copyright © 2016, 2024, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface

| | |
|-----------------------------|------|
| Purpose | v |
| Audience | v |
| Documentation Accessibility | v |
| Critical Patches | vi |
| Diversity and Inclusion | vi |
| Related Resources | vi |
| Conventions | vi |
| Screenshot Disclaimer | vi |
| Acronyms and Abbreviations | vi |
| Basic Actions | vii |
| Symbols and Icons | viii |

1 Overview of Applications in an Application Container

| | | |
|-------|---|-----|
| 1.1 | Managing Applications in an Application Container | 1-1 |
| 1.2 | Application Maintenance | 1-1 |
| 1.2.1 | Application Installation | 1-2 |
| 1.2.2 | Application Upgrade | 1-2 |

2 Patch-set Application Steps

| | | |
|-------|--|-----|
| 2.1 | Purpose | 2-1 |
| 2.2 | Steps to be Followed | 2-1 |
| 2.2.1 | Start Application Upgrade | 2-2 |
| 2.2.2 | Compiling Incremental Units | 2-2 |
| 2.2.3 | Recompilation of invalids | 2-2 |
| 2.2.4 | End Application upgrade | 2-2 |
| 2.2.5 | Start Application upgrade | 2-3 |
| 2.2.6 | Application Root Objects Conversion for New Objects | 2-3 |
| 2.2.7 | Application Root Objects Conversion for Existing Objects | 2-3 |
| 2.2.8 | Recompilation of Invalids | 2-4 |
| 2.2.9 | End Application Upgrade | 2-4 |
| 2.3 | Synchronize application PDBs | 2-4 |

| | | |
|-------|----------------------|-----|
| 2.3.1 | Purpose | 2-4 |
| 2.3.2 | Steps to be Followed | 2-5 |

3 Step by Step Execution

| | | |
|-----|---|-----|
| 3.1 | Pre-Requisites | 3-1 |
| 3.2 | Patch-set Application Step by Step with Screenshots | 3-2 |

A Annexure

Index

Preface

This topic contains the following sub-topics:

- [Purpose](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Critical Patches](#)
- [Diversity and Inclusion](#)
- [Related Resources](#)
- [Conventions](#)
- [Screenshot Disclaimer](#)
- [Acronyms and Abbreviations](#)
- [Basic Actions](#)
- [Symbols and Icons](#)

Purpose

This manual is designed to help you quickly get acquainted with the Oracle Multi Tenant Patchset deployment in Oracle Banking Corporate Lending.

Audience

This manual is intended for the following User/User Roles

Table 1 Audience

| Role | Function |
|---------------------|---|
| Implementation team | Implementation of Oracle Banking Corporate Lending Solution |
| Presales team | Install Oracle Banking Corporate Lending for demo purpose |
| Bank personnel | Who installs Oracle Banking Corporate Lending |

This guide is intended for IT administrators, developers, WebLogic admin or ops-web team who are responsible for installing OFSS Banking Products. The user of this manual is expected to have basic understanding of Application servers like Oracle Weblogic and Oracle Database.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Critical Patches

Oracle advises customers to get all their security vulnerability information from the Oracle Critical Patch Update Advisory, which is available at [Critical Patches, Security Alerts and Bulletins](#). All critical patches should be applied in a timely manner to make sure effective security, as strongly recommended by [Oracle Software Security Assurance](#).

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Related Resources

For more information, refer *Multi-Tenant Deployment User Manual*.

Conventions

The following text conventions are used in this document:

Table 2 Conventions and Meaning

| Convention | Meaning |
|-----------------|--|
| boldface | Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary. |
| <i>italic</i> | Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values. |
| monospace | Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter. |

Screenshot Disclaimer

Personal information used in the interface or documents is dummy and does not exist in the real world. It is only for reference purposes.

Acronyms and Abbreviations

The list of the acronyms and abbreviations used in this guide are as follows:

Table 3 Acronyms and Abbreviations

| Abbreviation | Description |
|--------------|-------------------------------|
| CDB | Container Database |
| EAR | Enterprise Archive file |
| MIS | Management Information System |
| PDB | Pluggable Database |
| SMS | Security Management System |
| SQL | Structured Query Language |
| UDF | User Defined Field |
| URL | Uniform Resource Locator |

Basic Actions

Table 4 List of Basic Actions


| Action | Description |
|---------------------|---|
| Approve | Click Approve to approve the initiated report. This button is displayed, once the user click Authorize . |
| Audit | Click Audit to view the maker details, checker details of the particular record, and record status. This button is displayed only for the records that are already created. |
| Authorize | Click Authorize to authorize the record created. A maker of the screen is not allowed to authorize the report. Only a checker can authorize a record. This button is displayed only for the already created records. |
| Close | Click Close to close a record. This action is available only when a record is created. |
| Confirm | Click Confirm to confirm the performed action. |
| Cancel | Click Cancel to cancel the performed action. |
| Compare | Click Compare to view the comparison through the field values of old record and the current record. This button is displayed in the widget, once the user click Authorize . |
| Collapse All | Click Collapse All to hide the details in the sections. This button is displayed, once the user click Compare . |
| Expand All | Click Expand All to expand and view all the details in the sections. This button is displayed, once the user click Compare . |
| New | Click New to add a new record. The system displays a new record to specify the required data. <div style="border-left: 2px solid #0070C0; padding-left: 10px; margin-top: 10px;"> <p> Note:</p> <p>The fields which are marked in asterisk red are mandatory fields.</p> </div> |
| OK | Click OK to confirm the details in the screen. |
| Save | Click Save to save the details entered or selected in the screen. |

Table 4 (Cont.) List of Basic Actions

| Action | Description |
|-----------------------------|---|
| View | Click View to view the report details in a particular modification stage. This button is displayed in the widget, once the user click Authorize . |
| View Difference only | Click View Difference only to view a comparison through the field element values of old record and the current record, which has undergone changes. This button is displayed, once the user click Compare . |

Symbols and Icons

The list of symbols and icons available on the screens are as follows:

Table 5 Symbols and Icons - Common














| Symbol/Icon | Function |
|---|-----------------------------------|
|  | Minimize |
|  | Maximize |
|  | Close |
|  | Perform Search |
|  | Open a list |
|  | Navigate to the first record |
|  | Navigate to the last record |
|  | Navigate to the previous record |
|  | Navigate to the next record |
|  | Grid view |
|  | List view |
|  | Refresh |
|  | Click this icon to add a new row. |

Table 5 (Cont.) Symbols and Icons - Common






























| Symbol/Icon | Function |
|---|--|
|  | Click this icon to delete a row, which is already added. |
|  | Calendar |
|  | Alerts |
|  | Unlock Option |
|  | View Option |
|  | New |
|  | Enter query |
|  | Execute query |
|  | Copy |
|  | Delete |
|  | Save |
|  | Search |
|  | Advanced search |
|  | Clear all |
|  | Reset |
|  | Export |
|  | Print |
|  | View Details |
|  | Sorting |

Table 6 Symbols and Icons - Widget

| Symbol/Icon | Function |
|---|---------------------|
|  | Open status |
|  | Unauthorized status |
|  | Rejected status |
|  | Closed status |
|  | Authorized status |
|  | Modification Number |
|  | Hold |
|  | Reverse |
|  | Authorize |
|  | Rollover |

1

Overview of Applications in an Application Container

This topic contains following sub-topics:

- [Managing Applications in an Application Container](#)
In an application container, an application is the named, versioned set of application common objects stored in the application root. In this context, “application” means “application back-end.” Application common objects include user accounts, tables, PL/SQL packages, and so on. An application can be shared with the application PDBs that belong to the application root.
- [Application Maintenance](#)
Application maintenance refers to installing, uninstalling, upgrading, or patching an application.

1.1 Managing Applications in an Application Container

In an application container, an application is the named, versioned set of application common objects stored in the application root. In this context, “application” means “application back-end.” Application common objects include user accounts, tables, PL/SQL packages, and so on. An application can be shared with the application PDBs that belong to the application root.

On performing application changes, application PDBs can synchronize with the application in the application root. The application container also manages the versions of the application and the patches to the application:

- While installing an application, user must specify the application version number.
- While upgrading an application, user must specify the old application version number and the new application version number.

As the application evolves, the application container maintains all of the versions that are applied.

1.2 Application Maintenance

Application maintenance refers to installing, uninstalling, upgrading, or patching an application.

Perform application installation, upgrade, and patching operations using an ALTER PLUGGABLE DATABASE APPLICATION statement.

The basic steps for application maintenance are as follows:

1. Log in to the application root.
2. Begin the operation with an ALTER PLUGGABLE DATABASE APPLICATION ... BEGIN statement in the application root.
3. Execute the application maintenance statements.
4. End the operation with an ALTER PLUGGABLE DATABASE APPLICATION ... END statement.

These statements can be issued in the same user session or in different user sessions.

- [Application Installation](#)
- [Application Upgrade](#)

1.2.1 Application Installation

An application installation is the initial creation of a master application definition. A typical installation creates user accounts, tables, and PL/SQL packages.

Refer *Multi-Tenant Deployment* document for more details on the application installation.

1.2.2 Application Upgrade

An application upgrade is a major change to an installed application.

Typically, an upgrade changes the physical architecture of the application. For example, an upgrade might add new tables, and packages, or alter the definitions of existing objects.

To upgrade the application, specify the following in the ALTER PLUGGABLE DATABASE APPLICATION statement:

- Name of the application
- Old application version number
- New application version number

During an application upgrade, the application remains available. To make this availability possible, Oracle Database clones the application root.

The following figure gives an overview of the application upgrade process.

Figure 1-1 Begin Upgrade




Figure 1-2 Begin Upgrade

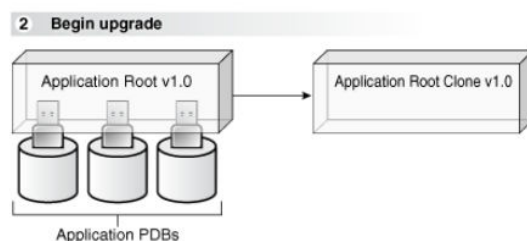
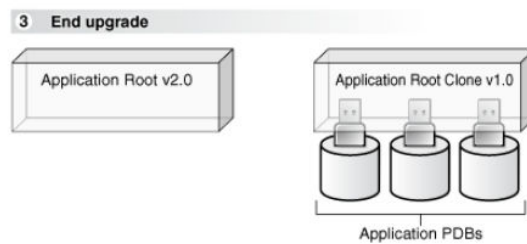
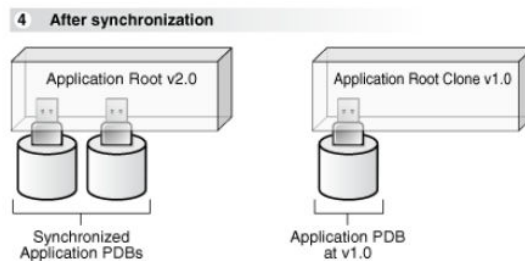


Figure 1-3 End Upgrade**Figure 1-4 After synchronization**

When an application is upgraded, Oracle Database automatically clones the application root.

During the upgrade, application PDBs point to the clone and applications continue to run during the upgrade. Application PDBs can perform DML on metadata-linked tables and views and query data-linked tables.

After the upgrade, the application root clone remains and continues to support any application PDB that still uses the pre-upgrade version of the application in the clone.

Application PDBs that are synchronized are pointed to the upgraded application root. Application PDBs that are not synchronized might continue to use the clone.

2

Patch-set Application Steps

Multi entity application root/PDB based setup has to be available to perform 18c database application upgrade for applying the patch-set. Refer Multi-Tenant_Deployment.docx for the deployment and installation steps.

Patch-set can be applied by following below steps in sequential order, and detail of each steps explained as separate sections subsequently.

- Application Upgrade
- Synchronize application PDBs

Patch-set Deployment Pre-requisites:

Download the required patch-set zip file and unzip it in a local path.

Verify whether the property files (fcubs.properties and env.properties) have the application root schema details where the application is available, if not update the approot schema details through installer (Refer Property_File_Creation document for more details) and re-generate the files.

Make sure to set the flag PATCHSET_INSTALLATION to 'Y'.

- [Purpose](#)
- [Steps to be Followed](#)
- [Synchronize application PDBs](#)

2.1 Purpose

Synchronizing an application updates the application in the application PDB to the latest version in the application root. When an application is upgraded in an application root, an application PDB that belongs to the application root is not changed until it is synchronized.

Application PDBs synchronize with an application by running an ALTER PLUGGABLE DATABASE statement with the SYNC clause.

2.2 Steps to be Followed

Below steps to be followed to initiate application upgrade:

- [Start Application Upgrade](#)
- [Compiling Incremental Units](#)
- [Recompilation of invalids](#)
- [End Application upgrade](#)
- [Start Application upgrade](#)
- [Application Root Objects Conversion for New Objects](#)
- [Application Root Objects Conversion for Existing Objects](#)

- [Recompilation of Invalids](#)
- [End Application Upgrade](#)

2.2.1 Start Application Upgrade

An ALTER PLUGGABLE DATABASE APPLICATION statement has to be issued to upgrade an application in the application root.

Each upgrade must be associated with an application name, starting version number, and ending version number.

- The common user must have the DBA privilege, and the privilege must be commonly granted in the application root.
- The application root must be in open read/write.
- Run the below script for initiating an application upgrade. This will initiate the application from current version to the next version (patch-set version).

[01_Start_Upgrade.sql](#)

Input sample for the script:

Table 2-1 Input sample for the script:

| | |
|---------------------------------|--|
| Spool Path | << Any local path>> |
| Application next version | 14.4.0.0.0 |

2.2.2 Compiling Incremental Units

Patch-set objects have to be loaded using bat file [E.g.: SMSDBCompileRun.bat, TFDBCompileRun.bat] by silent installer for respective product processor.

Compile the incremental SMS units using `/INSTALLER/SOFT/SMSDBCompileRun.sh` for UNIX installations or `/INSTALLER/SOFT/SMSDBCompileRun.bat` for Windows installations.

Compile the incremental OBCL units using `/INSTALLER/SOFT/TFDBCompileRun.sh` for UNIX installations or `/INSTALLER/SOFT/TFDBCompileRun.bat` for Windows installations.

2.2.3 Recompilation of invalids

As the sharing property of most of the objects are modified other than NONE, recompilation of objects is not allowed outside an application.

Recompilation of objects will be initiated inside the application upgrade for sanity with zero invalids with the below script:

[03_Invalids_Recompilation_Inside_Upgrade.sql](#)

2.2.4 End Application upgrade

Application upgrade can be performed in the application root only and end of the upgrade is performed with an ALTER PLUGGABLE DATABASE APPLICATION END UPGRADE statement.

Run the below script for ending an application upgrade for patch-set.

[04_End_Upgrade.sql](#)

And run the invalid script by connecting to the common user in approot outside the upgrade.

[04_Invalids_Recompilation_Outside_Upgrade.sql](#)

2.2.5 Start Application upgrade

Run the below script for initiating another application upgrade for object conversion. This will initiate the application from current version to the next version (patch-set version).

[05_Start_Upgrade.sql](#)

Input sample for the script:

Table 2-2 Input sample for the script:

| | |
|---------------------------------|---------------------|
| Spool Path | << Any local path>> |
| Application next version | 14.4.0.0.0 |

2.2.6 Application Root Objects Conversion for New Objects

As part of patch-set when there are new tables added which has to be converted as DL or when there is a new function id which is identified to be an approot function is provided, otherwise no conversion will happen as part of this step

Below script takes care of converting the new DL objects during patch-set based on the deployment model of the application during installation.

[06_New_Object_Conversion.sql](#)

Input sample for the script:

Table 2-3 Input sample for the script

| | |
|---------------------------------|---------------------|
| Spool Path | << Any local path>> |
| Application next version | 14.4.0.0.0 |

2.2.7 Application Root Objects Conversion for Existing Objects

Various Sharing types of objects during installation:

- A static table will hold the information of selected table sharing as Data link. Other tables will be treated as Meta Data Link
- Sharing of object types such as INDEX, LOB, TABLE PARTITION, SEQUENCE, and DYNAMIC PACKAGES will remain as NONE.
- All other object types such as Packages, Procedures, Functions, and Synonyms would be converted as Meta Data Link sharing.

Sharing during upgrade:

Sharing of existing database objects will remain the same.

Below script takes care of converting the modified MDL objects when there is a re-creation [objects with Create or Replace command during creation] happens during patch-set.

[07_Object_Conversion.sql](#)

Input sample for the script:

| | |
|---------------------------------|---|
| Spool Path | << Any local path >> |
| Application next version | 14.4.0.0.0 |

When there are new tables introduced as part of patch-set which has to be converted into DL will be done separately. The recommendation for the same will be provided as part of patch-set instructions for this case.

2.2.8 Recompilation of Invalids

As the sharing property of most of the objects are modified other than NONE, recompilation of objects is not allowed outside an application.

Recompilation of objects will be initiated inside the application upgrade for sanity with zero invalids with the below script:

[08_Invalids_Recompilation_Inside_Upgrade](#)

2.2.9 End Application Upgrade

Application upgrade can be performed in the application root only and end of the upgrade is performed with an ALTER PLUGGABLE DATABASE APPLICATION END UPGRADE statement.

Run the below script for ending an application upgrade for patch-set.

[09_End_Upgrade.sql](#)

And run the invalid script by connecting to the common user in approot outside the upgrade.

[09_Invalids_Recompilation_Outside_Upgrade.sql](#)

2.3 Synchronize application PDBs

This topic contains following sub-topics:

- [Purpose](#)
- [Steps to be Followed](#)

2.3.1 Purpose

Synchronizing an application updates the application in the application PDB to the latest version in the application root. When an application is upgraded in an application root, an application PDB that belongs to the application root is not changed until it is synchronized.

Application PDBs synchronize with an application by running an ALTER PLUGGABLE DATABASE statement with the SYNC clause.

2.3.2 Steps to be Followed

Prerequisites

- The current user must have ALTER PLUGGABLE DATABASE system privilege.
- Ensure that the current container is the application PDB.
- Run an ALTER PLUGGABLE DATABASE APPLICATION statement with the SYNC clause.
- Run the below script to synchronize the PDBs with the latest application changes in the application root.

[10_PDB_Sync.sql](#)

3

Step by Step Execution

This topic contains following sub-topics:

- [Pre-Requisites](#)
This topic provides systematic instructions for pre-requisites.
- [Patch-set Application Step by Step with Screenshots](#)
This topic provides systematic instructions to patch-set application step by step with screenshots.

3.1 Pre-Requisites

This topic provides systematic instructions for pre-requisites.

1. Before applying the patch-set, we have to make sure the release is updated with the base version of the patch-set.

For Example, If the first patch-set of 14.2 is yet to be applied, the release has to be updated as '14.2.0.0.0'. It can be verified with the below queries.
`select param_name, param_val from CSTB_PARAM WHERE PARAM_NAME = 'RELEASE';`
`select module_group_id, release from SMTB_MODULES_GROUP;`

2. Another significant parameter is the values of application name and deployment type in CSTB_PARAM.

This value will be updated from the installer during Approot Object Conversion utility as part of deployment.
`select param_name, param_val from cstb_param where PARAM_NAME in ('MULTI_TENANT_APP_NAME', 'MULTI_TENANT_DEPLOYMENT_MODEL');`

The Application name of multi-tenant deployment will be stored in CSTB_PARAM as

Table 3-1 Parm name and Parm Val

| Param_Name | Param_Val |
|-----------------------|-----------|
| MULTI_TENANT_APP_NAME | OBCL |

The type of object conversion will be stored in CSTB_PARAM as

Table 3-2 Parm name and Parm Val

| Param_Name | Param_Val |
|-------------------------------|------------------------------------|
| MULTI_TENANT_DEPLOYMENT_MODEL | SA (or) SAUA (or) SASDD (or) SASDC |

- SA - Shared Application
- SAUA - Shared Application User Authentication
- SASDD - Shared Application Shared Data - Default
- SASDC - Shared Application Shared Data – Custom

3.2 Patch-set Application Step by Step with Screenshots

This topic provides systematic instructions to patch-set application step by step with screenshots.

1. Start Application upgrade

- a. Login into the Apropoot Schema as Common user.
- b. Run 01_Start_Upgrade.sql for initiating the application upgrade.
- c. User input has to be inputted for the below:

Table 3-3 Input sample for the script

| Input Type | User Input |
|--------------------------|---------------------|
| Spool Path | << Any local path>> |
| Application next version | 14.4.0.0.0 |

- d. Script will be executed as in the screen shot below and keep the SQL Plus session open for upcoming steps.

Execution Screenshot:

Figure 3-1 Start Application Upgrade

```

C:\app\client\prialac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> SPOOL ON
SQL> SET SQLBLANKLINES ON
SQL> SET SERVEROUTPUT ON
SQL> SET ERRORLOGGING ON
SQL> SET ECHO ON
SQL> prompt Welcome to Application PDB Configuration
Welcome to Application PDB Configuration
SQL> SPOOL "&SPOOL_PATH"
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\01Spool.txt
SQL>
SQL> DECLARE
2   l_app_name          VARCHAR2(128);
3   l_app_currver      VARCHAR2(30);
4   l_sql              VARCHAR2(256);
5 BEGIN
6
7   BEGIN
8     SELECT app_name
9     INTO l_app_name
10    FROM dba_applications
11    WHERE app_implicit <> 'Y'
12    AND app_name = (SELECT param_val FROM cstab_param WHERE Param_name = 'MULTI_TENANT_APP_NAME');
13  EXCEPTION
14    WHEN NO_DATA_FOUND THEN
15      dbms_output.put_line('Error Nodata-->'||SQLERRM);
16    WHEN OTHERS THEN
17      dbms_output.put_line('Error others-->'||SQLERRM);
18  END;
19  SELECT MAX(app_version)
20  INTO l_app_currver
21  FROM dba_app_versions
22  WHERE app_name = l_app_name;
23
24  l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN UPGRADE ''' || l_app_currver || ''' TO ''' || '&P_APPLICATION_NEXTVER' ||'''';
25  dbms_output.put_line('l_sql: ' || l_sql);
26  EXECUTE IMMEDIATE l_sql;
27
28  l_sql := 'ALTER SYSTEM SET DEFAULT_SHARING = NONE';
29  dbms_output.put_line('l_sql: ' || l_sql);
30  EXECUTE IMMEDIATE l_sql;
31
32  EXCEPTION
33    WHEN OTHERS THEN

```

Figure 3-2 Start Application Upgrade

```

14      WHEN NO_DATA_FOUND THEN
15          dbms_output.put_line('Error Nodata-->'||SQLERRM);
16      WHEN OTHERS THEN
17          dbms_output.put_line('Error others-->'||SQLERRM);
18      END;
19      SELECT MAX(app_version)
20      INTO l_app_currver
21      FROM dba_app_versions
22      WHERE app_name = l_app_name;
23
24      l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN UPGRADE ''' || l_app_currver || ''' TO ''' || '&P_APPLICATION_NEXTVER' || '''';
25      dbms_output.put_line('l_sql: ' || l_sql);
26      EXECUTE IMMEDIATE l_sql;
27
28      l_sql := 'ALTER SYSTEM SET DEFAULT_SHARING = NONE';
29      dbms_output.put_line('l_sql: ' || l_sql);
30      EXECUTE IMMEDIATE l_sql;
31
32      EXCEPTION
33      WHEN OTHERS THEN
34          dbms_output.put_line('Error -->'||SQLERRM);
35      END;
36  /
37
38  Enter value for p_application_nextver: 14.2.0.0.2
39  old 24:   l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN UPGRADE ''' || l_app_currver || ''' TO ''' || '&P_APPLICATION_NEXTVER' || '''';
40  new 24:   l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN UPGRADE ''' || l_app_currver || ''' TO ''' || '14.2.0.0.2' || '''';
41  l_sql: ALTER PLUGGABLE DATABASE APPLICATION FCUBS BEGIN UPGRADE '14.2.0.0.1' TO '14.2.0.0.2'
42  l_sql: ALTER SYSTEM SET DEFAULT_SHARING = NONE
43
44  PL/SQL procedure successfully completed.
45
46  SQL>
47  SQL> SET ERRORLOGGING OFF
48  SQL> SPOOL OFF
49  SQL>

```

2. Compiling Incremental Units

- a. Make sure that the fcubs.properties and env.properties are updated with approot schema details.
- b. Run the <Product Processor>DBCompileRun.bat from <Patchset>\INSTALLER\SOFT directory. DDL Compilation, Object Compilation and Static Data load will be done.

For Example: OBCL INSTALLATION

First load SMS objects first and then OBCL objects. i.e. Run SMSDBCompileRun.bat and after SMS object loading is completed, then initiate OBCL compilation Run TFDBCompileRun.bat

3. Recompilation of invalids

- a. Login into the Approot Schema as Common user
- b. Run 03_Invalids_Recompilation.sql for recompiling the invalids during application upgrade.
- c. No user input is required for this step.
- d. Script will be executed as in the screen shot below and keep the SQL Plus session open for upcoming steps.

Execution Screenshot:

Figure 3-3 Recomp

```

C:\app\client\gribalac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> prompt Welcome to Application Upgrade Invalids Recompilation
Welcome to Application Upgrade Invalids Recompilation
SQL> SPOOL "85POOL_PATH"
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\85Spool.txt
SQL>
SQL> DECLARE
2   inval_cnt NUMBER := 0;
3 BEGIN
4   WHILE inval_cnt < 3 LOOP
5     --SCRIPT
6     FOR J IN (Select 'alter ' || object_type || ' ' || object_name || ' compile' invalidobject1
7               FROM user_objects
8               WHERE status = 'INVALID'
9               AND object_type IN ('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER')
10              )
11     LOOP
12       DBMS_OUTPUT.PUT_LINE(chr(10));
13       EXECUTE IMMEDIATE J.invalidobject1;
14     END LOOP;
15     inval_cnt := inval_cnt + 1;
16   END LOOP;
17 END;
18 /

PL/SQL procedure successfully completed.
SQL>
SQL> DECLARE

```

Figure 3-4 Recomp

```

C:\app\client\gribalac\product\18.0.0\client_1\bin\sqlplus.exe

PL/SQL procedure successfully completed.
SQL> select count(*) from user_objects where status = 'INVALID';
COUNT(*)
-----
0
1 row selected.

SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>
SQL>
SQL>
SQL>
SQL>

```

4. End Application upgrade

- a. Login into the Approot Schema as Common user.
- b. Run 06_End_Upgrade.sql for recompiling the invalids during application upgrade.
- c. No user input is required for this step.
- d. Script will be executed as in the screen shot below.

Execution Screenshot:

Figure 3-5 End Application Upgrade

```

C:\app\client\primalac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> prompt Welcome to Application PDB Configuration
Welcome to Application PDB Configuration
SQL> SPOOL "8SPOOL_PATH"
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\06Spool1.txt
SQL>
SQL> DECLARE
2   l_app_name  VARCHAR2(128);
3   l_sql      VARCHAR2(256);
4 BEGIN
5     BEGIN
6         SELECT app_name
7             INTO l_app_name
8             FROM dba_applications
9             WHERE app_implicit <> 'y'
10            AND app_name = (SELECT param_val FROM cstb_param WHERE param_name = 'MULTI_TENANT_APP_NAME');
11    EXCEPTION
12    WHEN NO_DATA_FOUND THEN
13        dbms_output.put_line('Error1 Nodata-->')||SQLERRM);
14    WHEN OTHERS THEN
15        dbms_output.put_line('Error1 others-->')||SQLERRM);
16    END;
17    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' END UPGRADE ';
18    dbms_output.put_line('l_sql: ' || l_sql);
19    EXECUTE IMMEDIATE l_sql;
20
21 EXCEPTION
22 WHEN OTHERS THEN
23     DBMS_OUTPUT.PUT_LINE('Error --->')||SQLERRM);
24 END;
25 /
l_sql: ALTER PLUGGABLE DATABASE APPLICATION FCUBS END UPGRADE
PL/SQL procedure successfully completed.
SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>

```

5. Start Application upgrade

- a. Login into the Aproot Schema as Common user.
- b. Run 05_Start_Upgrade.sql for initiating the application upgrade.
- c. User input has to be inputted for the below:

Table 3-4 Input sample for the script

| Input Type | User Input |
|--------------------------|---------------------|
| Spool Path | << Any local path>> |
| Application next version | 14.4.0.0.0 |

- d. Script will be executed similar to step 1 above and keep the SQL Plus session open for upcoming steps.

6. Application Root objects conversion for new objects

- a. Login into the Aproot Schema as Common user.
- b. Run 06_New_Object_Conversion.sql for converting new aproot objects added during patch-set as DL
- c. User input has to be inputted for the below:

Table 3-5 Input sample for the script

| Input Type | User Input |
|--------------------------|----------------------------|
| Spool Path | << Any local path>> |
| Application next version | HUBUSER (common user name) |

Execution Screenshot:

Figure 3-6 Application Root objects conversion for new objects

```

C:\app\client\gribalac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> prompt Welcome to Application PDB Configuration
Welcome to Application PDB Configuration
SQL> SPOOL "85POOL_PATH"
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\02Spool.txt
SQL>
SQL> DECLARE
2     l_count NUMBER;
3     l_app_deployment VARCHAR2(30);
4 BEGIN
5     SELECT count(*)
6     INTO l_count
7     FROM user_objects
8     WHERE sharing = 'NONE' --to get the new set of DL approot objects if any
9     AND object_name IN (SELECT DISTINCT a.object_name
10                        FROM cstm_approot_objects a
11                        WHERE sharing = 'DL'
12                        AND UPPER(object_type) = 'TABLE'
13                        AND EXISTS (SELECT 1
14                                  FROM user_objects b
15                                  WHERE b.object_name = a.object_name)
16                        AND EXISTS (SELECT 1
17                                  FROM cstm_approot_functions_menu c
18                                  WHERE c.function_id = a.function_id
19                                  AND c.modifiable IN ('Y', 'S')));
20     dbms_output.put_line('l_count: ' || l_count);
21     IF l_count > 0 THEN
22         dbms_output.put_line('New DL objects are available');
23         SELECT param_val
24         INTO l_app_deployment
25         WHERE param_name = 'MULTI_TENANT_DEPLOYMENT_MODEL';
26         dbms_output.put_line('l_app_deployment: ' || l_app_deployment);
27     END IF;
28     IF l_app_deployment IS NOT NULL AND l_app_deployment = 'SAUA' THEN
29         UPDATE smtb_menu menu
30         SET menu.approot_flg = 'Y'
31         WHERE menu.function_id IN
32         (SELECT function_id
33          FROM csta_approot_functions_menu
34          WHERE modifiable = 'S'
35          UNION
36          SELECT summary_fn_id
37          FROM csta_approot_functions_menu
38          WHERE modifiable = 'S'
39          AND summary_fn_id IS NOT NULL) --SMS function id 'S'

```

Figure 3-7 Application Root objects conversion for new objects

```

C:\app\client\gribalac\product\18.0.0\client_1\bin\sqlplus.exe
...
90     AND c.modifiable IN ('Y', 'S'))
91     )
92     LOOP
93         DBMS_OUTPUT.PUT_LINE(chr(10));
94         EXECUTE IMMEDIATE l_sqlobject;
95         DBMS_OUTPUT.PUT_LINE(l_sqlobject);
96     END LOOP;
97     EXCEPTION
98     WHEN OTHERS THEN
99         DBMS_OUTPUT.PUT_LINE('Error --->||SQLERRM);
100    END;
101    ELSE
102        dbms_output.put_line('No new DL objects available');
103    END IF;
104    EXCEPTION
105    WHEN OTHERS THEN
106        dbms_output.put_line('Error --->||SQLERRM);
107    END;
108    /
Enter value for p_approot_user: HUBUSER
sql 77:      FOR I IN (SELECT 'BEGIN ' || chr(10) || 'DBMS_PDB.SET_DATA_LINKED(''8P_APPROOT_USER'' ||
rwm 77:      FOR I IN (SELECT 'BEGIN ' || chr(10) || 'DBMS_PDB.SET_DATA_LINKED(''HUBUSER'' ||
l_count: 1
New DL objects are available
l_app_deployment: SASDD

BEGIN
DBMS_PDB.SET_DATA_LINKED('HUBUSER','CSTM_CHECK2',1);
EXCEPTION
WHEN OTHERS then
DBMS_OUTPUT.PUT_LINE('ERROR ->' || SQLERRM);
END;

PL/SQL procedure successfully completed.

SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>

```

7. Application Root objects conversion for existing objects

- a. Login into the Approot Schema as Common user.
- b. Run 07_Object_Conversion.sql for initiating the application upgrade.
- c. User input has to be inputted for the below:

Table 3-6 Input sample for the script

| Input Type | User Input |
|--------------------------|----------------------------|
| Spool Path | << Any local path >> |
| Application next version | HUBUSER (common user name) |

Execution Screenshot:

Figure 3-8 Application Root objects conversion for existing objects

```

C:\app\client\gribalac\product18.0.0\client_1\bin\sqlplus.exe
SQL> SET SERVEROUTPUT ON
SQL> SET ERRORLOGGING ON
SQL> SET ECHO ON
SQL> prompt Welcome to Upgrade object conversion
Welcome to Upgrade object conversion
SQL> SPOOL "SSPOOL_PATH"
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\04Spool.txt
SQL>
SQL> DECLARE
  2   l_app_name          VARCHAR2(128);
  3 BEGIN
  4   BEGIN
  5     SELECT app_name
  6     INTO l_app_name
  7     FROM dba_applications
  8     WHERE app_implicit <> 'Y'
  9     AND app_name = (SELECT param_val FROM cstab_param WHERE Param_name = 'MULTI_TENANT_APP_NAME');
 10   EXCEPTION
 11     WHEN NO_DATA_FOUND THEN
 12       dbms_output.put_line('Error1 Nodata-->'||SQLERRM);
 13     WHEN OTHERS THEN
 14       dbms_output.put_line('Error1 others-->'||SQLERRM);
 15   END;
 16
 17   FOR I IN (SELECT 'BEGIN ' || chr(10) ||
 18              'DBMS_PDB.SET_METADATA_LINKED('&p_approut_user' || ',','' ||
 19              object_name || ',' || Namespace || ');' || chr(10) ||
 20              'EXCEPTION ' || chr(10) || 'WHEN OTHERS then ' || chr(10) ||
 21              'DBMS_OUTPUT.PUT_LINE(''ERROR ->' || SQLERRM);' ||
 22              chr(10) || 'END;' sqlobject
 23            FROM user_objects
 24            WHERE sharing = 'NONE'
 25            AND object_type NOT IN ('INDEX', 'LOB', 'TABLE PARTITION', 'SEQUENCE')
 26            AND (object_name NOT LIKE '%*%')
 27            AND (created_appid = (select app_id from dba_applications where app_name = l_app_name) OR
 28            modified_appid = (select app_id from dba_applications where app_name = l_app_name) ) LOOP
 29     DBMS_OUTPUT.PUT_LINE(chr(10));
 30     EXECUTE IMMEDIATE I.sqlobject;
 31   END LOOP;
 32 EXCEPTION
 33 WHEN OTHERS THEN
 34   DBMS_OUTPUT.PUT_LINE('Error --->'||SQLERRM);
 35 END;
 36 /
  
```

Figure 3-9 Application Root objects conversion for existing objects

```

C:\app\client\gribalac\product18.0.0\client_1\bin\sqlplus.exe
  5   SELECT app_name
  6   INTO l_app_name
  7   FROM dba_applications
  8   WHERE app_implicit <> 'Y'
  9   AND app_name = (SELECT param_val FROM cstab_param WHERE Param_name = 'MULTI_TENANT_APP_NAME');
 10  EXCEPTION
 11    WHEN NO_DATA_FOUND THEN
 12      dbms_output.put_line('Error1 Nodata-->'||SQLERRM);
 13    WHEN OTHERS THEN
 14      dbms_output.put_line('Error1 others-->'||SQLERRM);
 15  END;
 16
 17  FOR I IN (SELECT 'BEGIN ' || chr(10) ||
 18             'DBMS_PDB.SET_METADATA_LINKED('&p_approut_user' || ',','' ||
 19             object_name || ',' || Namespace || ');' || chr(10) ||
 20             'EXCEPTION ' || chr(10) || 'WHEN OTHERS then ' || chr(10) ||
 21             'DBMS_OUTPUT.PUT_LINE(''ERROR ->' || SQLERRM);' ||
 22             chr(10) || 'END;' sqlobject
 23          FROM user_objects
 24          WHERE sharing = 'NONE'
 25          AND object_type NOT IN ('INDEX', 'LOB', 'TABLE PARTITION', 'SEQUENCE')
 26          AND (object_name NOT LIKE '%*%')
 27          AND (created_appid = (select app_id from dba_applications where app_name = l_app_name) OR
 28          modified_appid = (select app_id from dba_applications where app_name = l_app_name) ) LOOP
 29    DBMS_OUTPUT.PUT_LINE(chr(10));
 30    EXECUTE IMMEDIATE I.sqlobject;
 31  END LOOP;
 32 EXCEPTION
 33 WHEN OTHERS THEN
 34   DBMS_OUTPUT.PUT_LINE('Error --->'||SQLERRM);
 35 END;
 36 /
Enter value for p_approut_user: HUBUSER
old 18:          'DBMS_PDB.SET_METADATA_LINKED('&p_approut_user' || ',','' ||
new 18:          'DBMS_PDB.SET_METADATA_LINKED(''HUBUSER'' || ',','' ||
PL/SQL procedure successfully completed.
SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>
  
```


8. Recompilation of invalids

- a. Login into the Approot Schema as Common user.

- b. Run `08_Invalids_Recompilation.sql` for recompiling the invalids during application upgrade.
- c. No user input is required for this step.
- d. Script will be executed as in the screen shot below and keep the SQL Plus session open for upcoming steps.

Execution Screenshot:

Figure 3-10 Recompilation of Invalids

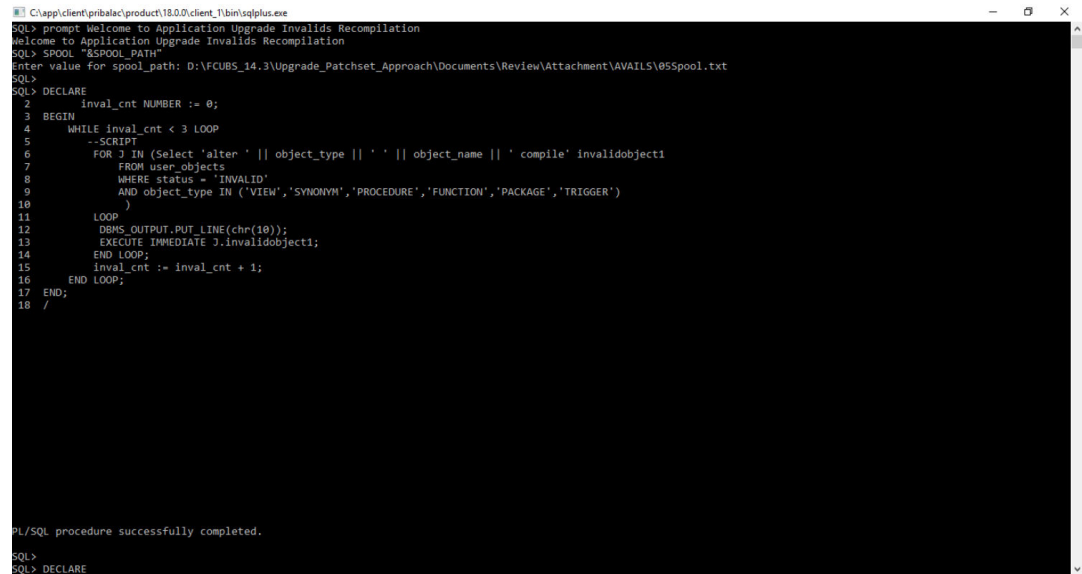


```

C:\app\client\primalac\product\18.0.0\client_1\bin\sqlplus.exe
SQL> prompt Welcome to Application Upgrade Invalids Recompilation
Welcome to Application Upgrade Invalids Recompilation
SQL> SPOOL "SPOOL_PATH"
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\055pool.txt
SQL>
SQL> DECLARE
2     inval_cnt NUMBER := 0;
3 BEGIN
4     WHILE inval_cnt < 3 LOOP
5         --SCRIPT
6         FOR J IN (Select 'alter ' || object_type || ' ' || object_name || ' compile' invalidobject1
7                   FROM user_objects
8                   WHERE status = 'INVALID'
9                   AND object_type IN ('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER')
10                  )
11             LOOP
12                 DBMS_OUTPUT.PUT_LINE(chr(10));
13                 EXECUTE IMMEDIATE J.invalidobject1;
14             END LOOP;
15         inval_cnt := inval_cnt + 1;
16     END LOOP;
17 END;
18 /

PL/SQL procedure successfully completed.
SQL> DECLARE

```

Figure 3-11 Recompilation of Invalids

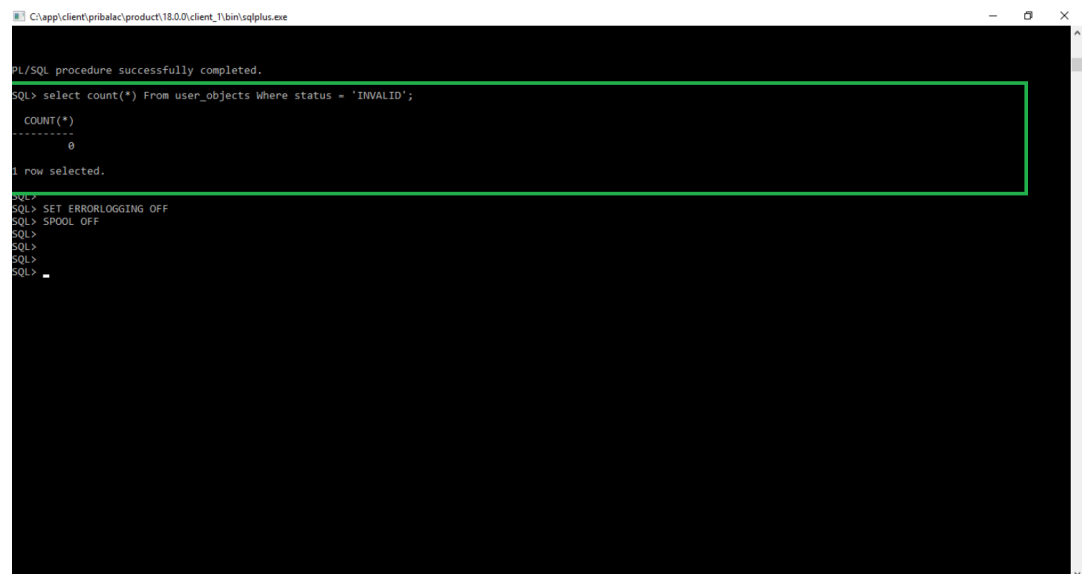

```

C:\app\client\primalac\product\18.0.0\client_1\bin\sqlplus.exe
PL/SQL procedure successfully completed.
SQL> select count(*) From user_objects Where status = 'INVALID';
COUNT(*)
-----
0
1 row selected.
SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>
SQL>
SQL>
SQL>
SQL>

```

9. End Application upgrade

- a. Login into the Apropoot Schema as Common user.

- b. Run `06_End_Upgrade.sql` for recompiling the invalids during application upgrade.
 - c. No user input is required for this step.
 - d. Script will be executed as that of step 4.
10. **Synchronize application PDBs**
- a. Login into the PDB Schema as Common user. For each PDB, this steps has to be done individually.
 - b. Run `07_PDB_Sync.sql` for syncing the application upgrade with PDBs.
 - c. No user input is required for this step.
 - d. Script will be executed as in the screen shot below.

Execution Screenshot:

Figure 3-12 `synch`

```

C:\app\client\gribalac\product18.0.0\client_1\bin\sqlplus.exe
SQL> SPOOL ON
SQL> SET SQLBLANKLINES ON
SQL> SET SERVEROUTPUT ON
SQL> SET ERRORLOGGING ON
SQL> SET ECHO ON
SQL> prompt Welcome to Application PDB Sync
Welcome to Application PDB Sync
SQL> SPOOL "&SPOOL_PATH"
Enter value for spool_path: D:\FCUBS_14.3\Upgrade_Patchset_Approach\Documents\Review\Attachment\AVAILS\08Spool.txt
SQL>
SQL> DECLARE
  2   l_app_name  VARCHAR2(128);
  3   l_sql       VARCHAR2(250);
  4 BEGIN
  5   BEGIN
  6     SELECT app_name
  7     INTO l_app_name
  8     FROM dba_applications
  9     WHERE app_implicit <> 'Y';
 10  EXCEPTION
 11  WHEN NO_DATA_FOUND THEN
 12    dbms_output.put_line('Error1 Nodata-->' ||SQLERRM);
 13  WHEN OTHERS THEN
 14    dbms_output.put_line('Error1 others-->' ||SQLERRM);
 15  END;
 16  l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name || ' SYNC ';
 17  dbms_output.put_line('l_sql: ' || l_sql);
 18  EXECUTE IMMEDIATE l_sql;
 19
 20 EXCEPTION
 21 WHEN OTHERS THEN
 22  dbms_output.put_line('Error --->' ||SQLERRM);
 23 END;
 24 /
l_sql: ALTER PLUGGABLE DATABASE APPLICATION FCUBS SYNC
PL/SQL procedure successfully completed.

SQL>
SQL> SET ERRORLOGGING OFF
SQL> SPOOL OFF
SQL>

```

A

Annexure

01_Start_Upgrade.sql

```
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade initiation
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name    VARCHAR2(128);
    l_app_currver VARCHAR2(30);
    l_sql         VARCHAR2(256);
BEGIN
    BEGIN
        SELECT app_name
            INTO l_app_name
            FROM dba_applications
            WHERE app_implicit <> 'Y'
            AND app_name = (SELECT param_val FROM cstb_param WHERE Param_name =
'MULTI_TENANT_APP_NAME');
    EXCEPTION
        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error1 Nodata---->||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error1 others---->||SQLERRM);
    END;

    BEGIN
        SELECT MAX(app_version)
            INTO l_app_currver
            FROM dba_app_versions
            WHERE app_name = l_app_name;
    EXCEPTION
```

```

        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error2 Nodata--->||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error2 others--->||SQLERRM);
    END;

    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN
UPGRADE ''' || l_app_currver || ''' TO ''' || '&P_APPLICATION_NEXTVER' || '''';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

    l_sql := 'ALTER SYSTEM SET DEFAULT_SHARING = NONE';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('Error --->||SQLERRM);
END;
/

SET ERRORLOGGING OFF
SPOOL OFF

```

03_Invalids_Recompilation_Inside_Upgrade.sql

```

/* Script for Shared Application + Shared Data */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP '; '
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade Invalids Recompilation
SPOOL "&SPOOL_PATH"

DECLARE
    inval_cnt          NUMBER := 0;
    l_object_name      VARCHAR2(240);
BEGIN
    WHILE inval_cnt < 3 LOOP
        --SCRIPT
        FOR J IN (Select 'alter ' || object_type || ' ' || object_name ||'
compile' invalidobject1,

```

```

        object_name
        FROM user_objects
        WHERE status = 'INVALID'
        AND created_appid IS NOT NULL
        AND object_type IN
('VIEW', 'SYNONYM', 'PROCEDURE', 'FUNCTION', 'PACKAGE', 'TRIGGER', 'MATERIALIZED
VIEW'))
    LOOP
        BEGIN
            l_object_name := j.object_name;
            dbms_output.put_line(chr(10));
            EXECUTE IMMEDIATE J.invalidobject1;
        EXCEPTION
            WHEN OTHERS THEN
                dbms_output.put_line('failed for -->' || l_object_name);
        END;
    END LOOP;
    inval_cnt := inval_cnt + 1;
END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
DECLARE
    inval_cnt1          NUMBER := 0;
    l_object_name       VARCHAR2(240);
BEGIN
    WHILE inval_cnt1 < 3 LOOP
        --SCRIPT
        FOR k IN (Select 'alter package ' || object_name || ' compile body'
invalidobject2,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NOT NULL
                AND object_type IN ('PACKAGE BODY'))
        LOOP
            BEGIN
                l_object_name := k.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE k.invalidobject2;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('FAILED FOR -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt1 := inval_cnt1 + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
select count(*) From user_objects Where status = 'INVALID';

```

```
SET ERRORLOGGING OFF
SPOOL OFF
```

04_End_Upgrade.sql

```
/* Pre-requisites: Step 3 on Application associated pdb creation is completed
*/
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application end Upgrade
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name    VARCHAR2(128);
    l_sql         VARCHAR2(256);
BEGIN
    BEGIN
        SELECT app_name
            INTO l_app_name
            FROM dba_applications
            WHERE app_implicit <> 'Y'
              AND app_name = (SELECT param_val FROM cstb_param WHERE param_name
= 'MULTI_TENANT_APP_NAME');
        EXCEPTION
            WHEN NO_DATA_FOUND THEN
                dbms_output.put_line('Error1 Nodata---->'||SQLERRM);
            WHEN OTHERS THEN
                dbms_output.put_line('Error1 others---->'||SQLERRM);
        END;
        l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' END
UPGRADE ';
        dbms_output.put_line('l_sql: ' || l_sql);

        EXECUTE IMMEDIATE l_sql;

    EXCEPTION
        WHEN OTHERS THEN
            DBMS_OUTPUT.PUT_LINE('Error --->'||SQLERRM);
    END;
/
```

```
SET ERRORLOGGING OFF
SPOOL OFF
```

04_Invalids_Recompilation_Outside_Upgrade.sql

```
/* Script for Shared Application + Shared Data */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade Invalids Recompilation
SPOOL "&SPOOL_PATH"

DECLARE
    inval_cnt          NUMBER := 0;
    l_object_name      VARCHAR2(240);
BEGIN
    WHILE inval_cnt < 3 LOOP
        --SCRIPT
        FOR J IN (Select 'alter ' || object_type || ' ' || object_name || '
compile' invalidobject1,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NULL
                AND object_type IN
('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER','MATERIALIZED
VIEW'))
        LOOP
            BEGIN
                l_object_name := j.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE J.invalidobject1;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('failed for -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt := inval_cnt + 1;
    END LOOP;
EXCEPTION
```



```

        WHEN OTHERS THEN
            dbms_output.put_line('FAILED FOR -->' || l_object_name);
    END;
/
DECLARE
    inval_cnt1          NUMBER := 0;
    l_object_name       VARCHAR2(240);
BEGIN
    WHILE inval_cnt1 < 3 LOOP
        --SCRIPT
        FOR k IN (Select 'alter package ' || object_name || ' compile body'
invalidobject2,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NULL
                AND object_type IN ('PACKAGE BODY'))
        LOOP
            BEGIN
                l_object_name := k.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE k.invalidobject2;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('FAILED FOR -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt1 := inval_cnt1 + 1;
    END LOOP;
EXCEPTION
WHEN OTHERS THEN
    dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
select count(*) From user_objects Where status = 'INVALID';

SET ERRORLOGGING OFF
SPOOL OFF

```

05_Start_Upgrade.sql

```

SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON

```

```

SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade initiation
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name    VARCHAR2(128);
    l_app_currver VARCHAR2(30);
    l_sql         VARCHAR2(256);
BEGIN

    BEGIN
        SELECT app_name
            INTO l_app_name
            FROM dba_applications
            WHERE app_implicit <> 'Y'
            AND app_name = (SELECT param_val FROM cstb_param WHERE Param_name =
'MULTI_TENANT_APP_NAME');
    EXCEPTION
        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error1 Nodata--->'||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error1 others--->'||SQLERRM);
    END;

    BEGIN
        SELECT MAX(app_version)
            INTO l_app_currver
            FROM dba_app_versions
            WHERE app_name = l_app_name;
    EXCEPTION
        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error2 Nodata--->'||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error2 others--->'||SQLERRM);
    END;

    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' BEGIN
UPGRADE '''|| l_app_currver || ''' TO '''|| '&P_APPLICATION_NEXTVER' ||'''';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

    l_sql := 'ALTER SYSTEM SET DEFAULT_SHARING = NONE';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('Error --->'||SQLERRM);
END;
/

SET ERRORLOGGING OFF
SPOOL OFF

```

06_New_Object_Conversion.sql

```

/*      Script      for      Shared      Object      Conversion      for      patch-set
*/
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Upgrade New object Conversion
SPOOL    "&SPOOL_PATH"

DECLARE
    l_count          NUMBER;
    l_app_deployment VARCHAR2(30);
BEGIN
    SELECT count(*)
       INTO l_count
       FROM user_objects
      WHERE sharing = 'NONE' --to get the new set of DL approot objects if any
      AND object_name IN
          (SELECT DISTINCT a.object_name
           FROM cstm_approot_objects a
          WHERE sharing = 'DL'
            AND UPPER(object_type) = 'TABLE'
            AND EXISTS (SELECT 1
                       FROM user_objects b
                       WHERE b.object_name = a.object_name)
            AND EXISTS (SELECT 1
                       FROM cstm_approot_functions_menu c
                       WHERE c.function_id = a.function_id
                             AND c.modifiable IN ('Y', 'S')));
    dbms_output.put_line('l_count:      ' || l_count);

    IF l_count > 0 THEN
        dbms_output.put_line('New DL objects are available');
        SELECT param_val
           INTO l_app_deployment
           FROM cstb_param
          WHERE param_name = 'MULTI_TENANT_DEPLOYMENT_MODEL';
        dbms_output.put_line('l_app_deployment: ' || l_app_deployment);

        IF l_app_deployment IS NOT NULL AND l_app_deployment = 'SAUA' THEN

```

```

UPDATE smtb_menu menu
  SET menu.approot_flg = 'Y'
  WHERE menu.function_id IN
    (SELECT function_id
     FROM cstm_approot_functions_menu
     WHERE modifiable = 'S'
    UNION
     SELECT summary_fn_id
     FROM cstm_approot_functions_menu
     WHERE modifiable = 'S'
     AND summary_fn_id IS NOT NULL) --SMS function id 'S'
  AND menu.approot_flg <> 'Y'; --excluding the already modified
approot function ids in menu.
ELSIF l_app_deployment IS NOT NULL AND l_app_deployment = 'SASDD' THEN
  UPDATE smtb_menu menu
    SET menu.approot_flg = 'Y'
    WHERE menu.function_id IN
      (SELECT function_id
       FROM cstm_approot_functions_menu
       UNION
        SELECT summary_fn_id
        FROM cstm_approot_functions_menu
        WHERE summary_fn_id IS NOT NULL)
    AND menu.approot_flg <> 'Y'; --excluding the already modified
approot function ids in menu.
ELSIF l_app_deployment IS NOT NULL AND l_app_deployment = 'SASDC' THEN
  /*Assumption new table cstm_approot_menu_custom_movedtopdb will be
available
and is populated with the function ids which are moved to PDB as
part of custom deployment
It has 2 columns FUNCTION_ID and SUMMARY_FN_ID*/

  UPDATE smtb_menu menu
    SET menu.approot_flg = 'Y'
    WHERE menu.function_id IN
      (SELECT function_id
       FROM cstm_approot_functions_menu
       UNION
        SELECT summary_fn_id
        FROM cstm_approot_functions_menu
        WHERE summary_fn_id IS NOT NULL)
    AND menu.function_id NOT IN --excluding the function ids moved
to PDB already.
      (SELECT function_id
       FROM cstm_approot_menu_movedtopdb
       UNION
        SELECT summary_fn_id
        FROM cstm_approot_menu_movedtopdb
        WHERE summary_fn_id IS NOT NULL)
    AND menu.approot_flg <> 'Y'; --excluding the already modified
approot function ids in menu.
  END IF;

BEGIN
  FOR I IN (SELECT 'BEGIN ' || chr(10) ||
              'DBMS_PDB.SET_DATA_LINKED('&P_APPROOT_USER'' ||

```

```

','' ||
                                Object_Name || ',' || Namespace || '); ' ||
chr(10) ||
                                'EXCEPTION ' || chr(10) ||
                                'WHEN OTHERS THEN ' || chr(10) ||
                                'DBMS_OUTPUT.PUT_LINE(''ERROR ->' || SQLERRM); ' ||
                                chr(10) || 'END;' sqlobject
                                FROM user_objects
                                WHERE sharing = 'NONE' --to get the new set of DL
aproot objects if any
                                AND object_name IN
                                (SELECT DISTINCT a.object_name
                                 FROM cstm_aproot_objects a
                                 WHERE sharing = 'DL'
                                 AND UPPER(object_type) = 'TABLE'
                                 AND EXISTS (SELECT 1
                                             FROM user_objects b
                                             WHERE b.object_name = a.object_name)
                                 AND EXISTS
                                 (SELECT 1
                                  FROM cstm_aproot_functions_menu c
                                  WHERE c.function_id = a.function_id
                                  AND c.modifiable IN ('Y', 'S')))) LOOP
                                DBMS_OUTPUT.PUT_LINE(chr(10));
                                EXECUTE IMMEDIATE I.sqlobject;
                                DBMS_OUTPUT.PUT_LINE(I.sqlobject);
                                END LOOP;
                                EXCEPTION
                                WHEN OTHERS THEN
                                    DBMS_OUTPUT.PUT_LINE('Error --->' || SQLERRM);
                                END;
                                ELSE
                                    dbms_output.put_line('No new DL objects available');
                                END IF;
                                EXCEPTION
                                WHEN OTHERS THEN
                                    dbms_output.put_line('Error --->' || SQLERRM);
                                END;
                                /

                                SET ERRORLOGGING OFF
                                SPOOL OFF

```

07_Object_Conversion.sql

```

SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'

```

```

SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Upgrade object conversion
SPOOL "&SPOOL_PATH"
BEGIN
    FOR I IN (SELECT 'BEGIN ' || chr(10) ||
                    'DBMS_PDB.SET_METADATA_LINKED('&P_APPROOT_USER''' ||
',''' ||
                    Object_Name || ',' || Namespace || '); ' || chr(10)
||
                    'EXCEPTION ' || chr(10) || 'WHEN OTHERS then ' ||
chr(10) ||
                    'DBMS_OUTPUT.PUT_LINE(''ERROR ->' || SQLERRM); ' ||
chr(10) || 'END;' sqlobject
            FROM user_objects
            WHERE sharing = 'NONE'
              AND object_type NOT IN ('INDEX', 'LOB', 'TABLE
PARTITION', 'SEQUENCE', 'JOB', 'MATERIALIZED VIEW', 'MATERIALIZED VIEW LOG')
              AND application = 'Y'
              AND (object_name,object_type) NOT IN (SELECT
object_name,object_type
                                                    FROM
cstm_approot_objects
                                                    WHERE function_id
= 'DYNAMIC'
                                                    AND sharing
= 'NONE'
                                                    )
            ) LOOP
        dbms_output.put_line(chr(10));
        EXECUTE IMMEDIATE I.sqlobject;
        dbms_output.put_line(I.sqlobject);
    END LOOP;
EXCEPTION
WHEN OTHERS THEN
    dbms_output.put_line('Error --->' || SQLERRM);
END;
/
SET ERRORLOGGING OFF
SPOOL OFF

```

08_Invalids_Recompilation_Inside_Upgrade.sql

```

/* Script for Shared Application + Shared Data */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000

```

```

SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade Invalids Recompilation
SPOOL "&SPOOL_PATH"

DECLARE
    inval_cnt          NUMBER := 0;
    l_object_name      VARCHAR2(240);
BEGIN
    WHILE inval_cnt < 3 LOOP
        --SCRIPT
        FOR J IN (Select 'alter ' || object_type || ' ' || object_name ||
compile' invalidobject1,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NOT NULL
                AND object_type IN
('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER','MATERIALIZED
VIEW'))
        LOOP
            BEGIN
                l_object_name := j.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE J.invalidobject1;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('failed for -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt := inval_cnt + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
DECLARE
    inval_cnt1         NUMBER := 0;
    l_object_name      VARCHAR2(240);
BEGIN
    WHILE inval_cnt1 < 3 LOOP
        --SCRIPT
        FOR k IN (Select 'alter package ' || object_name || ' compile body'
invalidobject2,
                object_name
                FROM user_objects

```

```

        WHERE status = 'INVALID'
        AND created_appid IS NOT NULL
        AND object_type IN ('PACKAGE BODY'))
    LOOP
        BEGIN
            l_object_name := k.object_name;
            dbms_output.put_line(chr(10));
            EXECUTE IMMEDIATE k.invalidobject2;
        EXCEPTION
            WHEN OTHERS THEN
                dbms_output.put_line('FAILED FOR -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt1 := inval_cnt1 + 1;
    END LOOP;
EXCEPTION
WHEN OTHERS THEN
    dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
select count(*) From user_objects Where status = 'INVALID';

SET ERRORLOGGING OFF
SPOOL OFF

```

09_End_Upgrade.sql

```

/* Pre-requisites: Step 3 on Application associated pdb creation is completed
*/
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application end Upgrade
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name VARCHAR2(128);
    l_sql VARCHAR2(256);
BEGIN
    BEGIN
        SELECT app_name

```



```

        INTO l_app_name
        FROM dba_applications
        WHERE app_implicit <> 'Y'
        AND app_name = (SELECT param_val FROM cstb_param WHERE param_name
= 'MULTI_TENANT_APP_NAME');
    EXCEPTION
        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error1 Nodata--->'||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error1 others--->'||SQLERRM);
    END;
    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' END
UPGRADE ';
    dbms_output.put_line('l_sql: ' || l_sql);

    EXECUTE IMMEDIATE l_sql;

EXCEPTION
WHEN OTHERS THEN
    DBMS_OUTPUT.PUT_LINE('Error --->'||SQLERRM);
END;
/

SET ERRORLOGGING OFF
SPOOL OFF

```

09_Invalids_Recompilation_Outside_Upgrade.sql

```

/* Script for Shared Application + Shared Data */
SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application Upgrade Invalids Recompilation
SPOOL "&SPOOL_PATH"

DECLARE
    inval_cnt          NUMBER := 0;
    l_object_name      VARCHAR2(240);
BEGIN
    WHILE inval_cnt < 3 LOOP
        --SCRIPT
    
```

```

        FOR J IN (Select 'alter ' || object_type || ' ' || object_name ||
compile' invalidobject1,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NULL
                AND object_type IN
('VIEW','SYNONYM','PROCEDURE','FUNCTION','PACKAGE','TRIGGER','MATERIALIZED
VIEW'))
        LOOP
            BEGIN
                l_object_name := j.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE J.invalidobject1;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('failed for -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt := inval_cnt + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/
DECLARE
    inval_cnt1          NUMBER := 0;
    l_object_name       VARCHAR2(240);
BEGIN
    WHILE inval_cnt1 < 3 LOOP
        --SCRIPT
        FOR k IN (Select 'alter package ' || object_name || ' compile body'
invalidobject2,
                object_name
                FROM user_objects
                WHERE status = 'INVALID'
                AND created_appid IS NULL
                AND object_type IN ('PACKAGE BODY'))
        LOOP
            BEGIN
                l_object_name := k.object_name;
                dbms_output.put_line(chr(10));
                EXECUTE IMMEDIATE k.invalidobject2;
            EXCEPTION
                WHEN OTHERS THEN
                    dbms_output.put_line('FAILED FOR -->' || l_object_name);
            END;
        END LOOP;
        inval_cnt1 := inval_cnt1 + 1;
    END LOOP;
EXCEPTION
    WHEN OTHERS THEN
        dbms_output.put_line('FAILED FOR -->' || l_object_name);
END;
/

```

```

select count(*) From user_objects Where status = 'INVALID';

SET ERRORLOGGING OFF
SPOOL OFF

```

10_PDB_Sync.sql

```

SET VERIFY ON
SET HEAD ON
SET FEEDBACK 1
SET ARRAY 1
SET LINESIZE 10000
SET PAGESIZE 50000
SET LONG 10000
SET ECHO ON
SET TRIMSPOOL ON
SET COLSEP ';'
SET SERVEROUT OFF
clear screen
SPOOL ON
SET SQLBLANKLINES ON
SET SERVEROUTPUT ON
SET ERRORLOGGING ON
SET ECHO ON
prompt Welcome to Application PDB Sync
SPOOL "&SPOOL_PATH"

DECLARE
    l_app_name VARCHAR2(128);
    l_sql VARCHAR2(256);
BEGIN
    BEGIN
        SELECT app_name
            INTO l_app_name
            FROM dba_applications
            WHERE app_implicit <> 'Y';
    EXCEPTION
        WHEN NO_DATA_FOUND THEN
            dbms_output.put_line('Error1 Nodata--->'||SQLERRM);
        WHEN OTHERS THEN
            dbms_output.put_line('Error1 others--->'||SQLERRM);
    END;
    l_sql := 'ALTER PLUGGABLE DATABASE APPLICATION ' || l_app_name||' SYNC ';
    dbms_output.put_line('l_sql: ' || l_sql);
    EXECUTE IMMEDIATE l_sql;

EXCEPTION
WHEN OTHERS THEN
    dbms_output.put_line('Error --->'||SQLERRM);
END;
/

SET ERRORLOGGING OFF
SPOOL OFF

```

Index

A

Application Maintenance, [1-1](#)
Application Upgrade, [1-2](#)

M

Managing Applications in an Application
Container, [1-1](#)

P

Patch-set Application Steps, [2-1](#)
Pre-Requisites, [3-1](#)

S

Step by Step Execution, [3-1](#)
Synchronize application PDBs, [2-4](#)