

# Oracle® Banking Digital Experience

## Taxonomy Configuration Guide



Release 25.1.0.0.0  
G43057-01  
September 2025

ORACLE®

Copyright © 2015, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

## Preface

---

|                             |     |
|-----------------------------|-----|
| Purpose                     | i   |
| Before you Begin            | i   |
| Pre-requisites              | i   |
| Audience                    | i   |
| Documentation Accessibility | ii  |
| Critical Patches            | ii  |
| Diversity and Inclusion     | ii  |
| Related Resources           | ii  |
| Conventions                 | ii  |
| Screenshot Disclaimer       | iii |
| Acronyms and Abbreviations  | iii |
| Post-requisites             | iii |

## 1 Introduction

---

## 2 Taxonomy Validation Table structure

---

## 3 Taxonomy Validation Process

---

## 4 Data Type Definition

---

## 5 Categories of taxonomy validators

---

## 6 Hierarchy to define field validation

---

|    |                                            |  |
|----|--------------------------------------------|--|
| 7  | Extended Validators                        |  |
| 8  | Validators for complex data type           |  |
| 9  | Configurations for taxonomy validation     |  |
| 10 | Key Things to note for Taxonomy Validation |  |
| 11 | Templates                                  |  |
| 12 | Configuring Taxonomy Validation in UI      |  |
| 13 | Utility to generate Validators             |  |
| 14 | Manual to create Validators                |  |
|    | Index                                      |  |

# Preface

- [Purpose](#)
- [Before you Begin](#)
- [Pre-requisites](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Critical Patches](#)
- [Diversity and Inclusion](#)
- [Related Resources](#)
- [Conventions](#)
- [Screenshot Disclaimer](#)
- [Acronyms and Abbreviations](#)
- [Post-requisites](#)

## Purpose

This guide is designed to help acquaint you with the Oracle Banking application. This guide provides answers to specific features and procedures that the user need to be aware of the module to function successfully.

## Before you Begin

Kindly refer to our **Getting Started User Guide** for common elements, including Symbols and Icons, Conventions Definitions, and so forth.

## Pre-requisites

Specify **User ID** and **Password**, and login to **Home** screen.

## Audience

This document is intended for the following audience:

- Customers
- Partners

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

### Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

## Critical Patches

Oracle advises customers to get all their security vulnerability information from the Oracle Critical Patch Update Advisory, which is available at [Critical Patches, Security Alerts and Bulletins](#). All critical patches should be applied in a timely manner to ensure effective security, as strongly recommended by [Oracle Software Security Assurance](#).

## Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

## Related Resources

For more information on any related features, refer to the following documents:

- Oracle Banking Digital Experience Installation Manuals
- Oracle Banking Digital Experience Licensing Manuals

## Conventions

The following text conventions are used in this document:

| Convention      | Meaning                                                                                                                        |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>boldface</b> | Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary. |
| <i>italic</i>   | Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.                  |

| Convention | Meaning                                                                                                                                |
|------------|----------------------------------------------------------------------------------------------------------------------------------------|
| monospace  | Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter. |

## Screenshot Disclaimer

Personal information used in the interface or documents is dummy and does not exist in the real world. It is only for reference purposes; actual screens that appear in the application may vary based on selected browser, theme, and mobile devices.

## Acronyms and Abbreviations

The list of the acronyms and abbreviations used in this guide are as follows:

**Table 1 Acronyms and Abbreviations**

| Abbreviation | Description                       |
|--------------|-----------------------------------|
| OBDX         | Oracle Banking Digital Experience |

## Post-requisites

After finishing all the requirements, please log out from the **Home** screen.

# 1

## Introduction

Taxonomy validation is used to validate each field of the request object for each service in OBDX application. This validation pattern for each field can be defined in OBDX tables.

The taxonomy validation can be used for language specific validation of fields. This validation can be configured at system as well as object level.

# 2

## Taxonomy Validation Table structure

This topic provides information on **Taxonomy Validation Table structure**.

### **DIGX\_FW\_LOCALE\_DATA\_TYPE**

This table holds the complete list of predefined data types in Out of the box OBDX application. The default locale used to define data type is 'en'. Separate entries for data types can be made for required locales. All the taxonomy data is validated against these data types. The validation pattern for specific data type is formed based on the column values of this table which is as follows:

For more information on fields, refer to the field description table.

**Table 2-1 Table: DIGX\_FW\_LOCALE\_DATA\_TYPE**

| Column Name      | Type          | Description                                                                    |
|------------------|---------------|--------------------------------------------------------------------------------|
| ID               | VARCHAR2(100) | Unique identifier of the data type                                             |
| LOCALE           | VARCHAR2(3)   | Locale identifier for which validation pattern is required                     |
| DESCRIPTION      | VARCHAR2(255) | Description of the taxonomy                                                    |
| MINLENGTH        | NUMBER        | minimum length required for the field                                          |
| MAXLENGTH        | NUMBER        | maximum length allowed for the field                                           |
| PATTERN          | VARCHAR2(255) | regex pattern required to be validated(if any)                                 |
| ERRORCODE        | VARCHAR2(255) | the default error code if the pattern validation fails                         |
| LENGTHERRORCODE  | VARCHAR2(255) | error code thrown if length criteria fails                                     |
| VALIDATION_CLASS | VARCHAR2(255) | Fully qualified name of the class that needs to be invoked for the validation. |

### **DIGX\_FW\_TAXONOMY\_DATA\_TYPE\_MAP**

This table is used to define taxonomy and map it to the desired data type. The taxonomy can be defined at class level or field level in this table. The validation pattern for the taxonomy can be defined using following columns.

For more information on fields, refer to the field description table.

Table 2-2 Table: DIGX\_FW\_LOCALE\_DATA\_TYPE

| Column Name        | Type          | Description                                                                                                                             |
|--------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| ID                 | VARCHAR2(255) | Unique identifier of the field to be validated. This can be only field name, field name in class hierarchy or complex fields parameters |
| TYPE               | VARCHAR2(20)  | (FIELD/CLASS/COMPLEX)                                                                                                                   |
| DATATYPEID         | VARCHAR2(100) | Identifier of the Data Type to be applied on taxonomy                                                                                   |
| MINLENGTH          | NUMBER        | minimum length required for the field                                                                                                   |
| MAXLENGTH          | NUMBER        | maximum length allowed for the field                                                                                                    |
| MANDATORY          | VARCHAR2(1)   | Is the field value mandatorily required (Values - Y/N)                                                                                  |
| ERRORCODE          | VARCHAR2(255) | the default error code if the pattern validation fails                                                                                  |
| LENGTHERROCODE     | VARCHAR2(255) | error code thrown if length criteria fails                                                                                              |
| MANDATORYERRORCODE | VARCHAR2(255) | error code thrown if mandatory criteria fails                                                                                           |

**Note**

For all the fields which are common in both the tables, the field value in 'DIGX\_FW\_TAXONOMY\_DATA\_TYPE\_MAP' will take the precedence.

# 3

## Taxonomy Validation Process

This topic provides information on **Taxonomy Validation Process**.

Taxonomy validation is applicable for all the objects that extend Validatable class. All the private member (excluding static) fields are validated using taxonomy validation.

The member fields of the class which also extends the Validatable class will be validated recursively. If there is a List of the fields, all the values will be validated in loop.

The detailed validation process is as follows:

1. The taxonomy validation flow will be called as part of the traditional <DTO\_Object>.validate method call in the service class.
2. The taxonomy validation should be applied or not for the respective DTO object is configured in preferences (Explained in ['Configurations'](#) section)
3. All the classes in 'xface' and 'appcore/dto' package which extends Validatable class will have their corresponding validator class loaded in the system in the same package. The validator class name would be <DTO\_NAME>Validator.java.

### Note

These validator classes need not be written by developers. These files will be generated at build time and loaded in corresponding ear files.

4. All the member fields of the validatable object class will be validated against the corresponding taxonomy data loaded.
5. If the validation fails for a particular field the corresponding error will be added to validation error list. All the validation criteria will be applied to the field at once and all the possible errors codes will collated together.
6. The ValidationError object will contain error code, error message, the fully qualified name of the parent request DTO on which validate method is called and the fieldkey. The fieldkey is the name of the field with its hierarchy w.r.t parent class.
7. If there is no validation data maintained for the field at class level or field level, an exception will be raised.
8. The rest process of service execution will remain same.

# 4

## Data Type Definition

This topic provides information on **Data Type Definition**.

All the out of box available data types will be listed in 'DIGX\_FW\_LOCALE\_DATA\_TYPE' table for default locale ('en').

If the data type needs to be redefined for a different locale (e.g. if pattern is required to be changed for different locale for a data type), a specific entry needs to be inserted for that data type for required data type.

If the validation pattern for a particular field is asked for a locale other than 'en' and corresponding entry is available in DIGX\_FW\_LOCALE\_DATA\_TYPE table the same will be applied. Otherwise by default validation pattern of 'en' will be used.

Perform following steps, if new data type is to be introduced for the taxonomy validation.

1. Make an entry in ' DIGX\_FW\_LOCALE\_DATA\_TYPE' for default locale ('en').
2. Define the validation definition using the columns available in the table (like minlength, maxlength, pattern etc).
3. Provide required error codes and their corresponding entries in 'DIGX\_FW\_ERROR\_MESSAGES'.
4. Create a taxonomy validation class for the data type and provide its fully qualified name in the respective column.
5. The out of the box taxonomy validation class should reside in 'projects\framework\com.ofss.digx.appcore.dto\src\com\ofss\digx\app\dto\validator\taxonomy' .
6. Each taxonomy validation class must implement 'com.ofss.digx.app.dto.validator.ITaxonomyValidator'. Use the overridden 'validate' method to provide logic for validation. It should be defined as singleton class and provide a 'getInstance' method for its loading. (Refer [Templates](#) section for reference).
7. Also each taxonomy validation class must implement the 'getCategory' method. The validator category can be 'NUMBER', 'TEXT', 'DATE' or 'OTHER' .

# 5

## Categories of taxonomy validators

This topic provides information on **Categories of taxonomy validators**. The taxonomy has been divided into 4 categories.

1. NUMBER
2. TEXT
3. DATE
4. OTHER

The validation of taxonomy based on length and pattern is done based on above 4 categories. Each taxonomy validator has to define its category by implementing 'getCategory()' method.

### Methodology to validate length based on category

- For TEXT category the minLength and maxLength columns will refer to the actual length of the string.
- For NUMBER category the minLength and maxLength columns will refer to the minimum and maximum allowed integer value for the input
- For DATE category the minLength and maxLength columns will refer to the minimum offset value (in number of days – positive or negative) from current date in which input date is allowed.
- For OTHER category length validation will not be performed.

# 6

## Hierarchy to define field validation

This topic provides information on **Hierarchy to define field validation**. The field can be defined for validation in one the following ways:

For more information on fields, refer to the field description table.

**Table 6-1 Hierarchy to define field validation**

| Level               | Description                                                                                                                                                                                                                                                            | Entry in DIGX_FW_TAXONOMY_DATA_MAP                                                                                        |         |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|---------|
| ID                  | Type                                                                                                                                                                                                                                                                   |                                                                                                                           |         |
| Field Level         | This level is used to validate the taxonomy based on the name of the field. It will be applicable to all the fields with same name in the application irrespective of its data type. This validation can be overridden by a class level entry for specific request DTO | Exact name (case-sensitive) of the private member field of the request DTO class.<br><br>e.g. payeeID, fromDate, name     | FIELD   |
| Class Level         | This level is used to validate the taxonomy based on the complete hierarchical field name starting with fully qualified name of the request DTO.                                                                                                                       | Fully hierarchical name of the field.<br><br>e.g.<br><br>com.ofss.digx.app.dto.finlimit.TransactionalLimitDTO.owner.value | CLASS   |
| Complex Field Level | This level is used to validate the fields of complex data type                                                                                                                                                                                                         | As defined in the complex data type validator class.                                                                      | COMPLEX |

### Note

1. While defining the taxonomy in 'DIGX\_FW\_TAXONOMY\_DATA\_MAP', override the parameters of 'DIGX\_FW\_LOCALE\_DATA\_TYPE' as per the requirement.
2. If the entry for the field already exists in 'DIGX\_FW\_TAXONOMY\_DATA\_MAP', do not modify it for specific case. Instead make an entry of the field as per class hierarchy.
3. In class level entry- If the same DTO is used in multiple services and different taxonomy validation is expected for the field, the developer can override this validation by adding service level taxonomy entry. In this case, instead of fully qualified DTO class name, use the fully qualified method name. (i.e. <Fully\_qualified\_service\_class\_name>.<method\_name>.fieldName).

# 7

## Extended Validators

This topic provides information on **Extended Validators**.

The default DTO validator classes can be extended using customized DTO validators. The customized validator must implement IDTOValidator class. The validation logic should be provided in overridden validate method.

The default DTO validation logic can be used by extending the default validator of the DTO class and calling super.validate() followed by customized validation logic. The customized class name should be given in 'DIGX\_FW\_CONFIG\_ALL\_B' under category 'ExtValidationConfig'.

The extended validation class should contain a protected constructor and should use singleton pattern with a 'getInstance' method to return the validator object. Refer the templates section for sample extended validator.

# 8

## Validators for complex data type

This topic provides information on **Validators for complex data type**.

The complex data type in OBDX can have specific validators. These validators are responsible for validating the fields in the complex data type.

The validation of the fields can also be configured in 'DIGX\_FW\_TAXONOMY\_DATA\_MAP' (as per given in section [Data Type Definition](#)). By using this, the field validation can be kept configurable using database entries (refer [Template](#) section for sample code). The custom validation can also be written in validators specific to complex data type.

# 9

## Configurations for taxonomy validation

This topic provides information on **Configurations for taxonomy validation**. Following are the day-0 configuration properties related to taxonomy. All the properties are maintained in 'DIGX\_FW\_CONFIG\_ALL\_B'. For all properties default handling is for 'false'.

| PROP_ID                                      | Value      | CATEGORY_ID      | Description                                                                                                                                                                                                                                                        |
|----------------------------------------------|------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TAXONOMY_VALIDATION_ENABLED                  | true/false | ValidationConfig | This property indicates whether taxonomy validation is required or annotation based validation should be applied.                                                                                                                                                  |
| CHECK_TAXONOMY_ALLOWLIST                     | true/false | ValidationConfig | <p>This property will be used if taxonomy validation is enabled. If this property is true, the DTOs for which taxonomy needs to be enabled should be configured.</p> <p>If false, the DTOs for which taxonomy validation is not required should be configured.</p> |
| <Fully_qualified_name_of_dto>.EnableTaxonomy | true/false | ValidationConfig | <p>This property will be effective for respective DTO if 'CHECK_TAXONOMY_ALLOWLIST' is true.</p> <p>If this property is set to true, taxonomy validation will be applied to the DTO. Otherwise it will follow annotation based validation.</p>                     |

| PROP_ID                                               | Value                                            | CATEGORY_ID         | Description                                                                                                                                                                                                                                    |
|-------------------------------------------------------|--------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <Fully_qualified_name_<br>of_dto>.DisableTaxonom<br>y | true/false                                       | ValidationConfig    | This property will be effective for respective DTO<br><br>If<br>'CHECK_TAXONOMY_ALL<br>OWLIST' is false.If this property is set to true, annotation based validation will be applied to the DTO. Otherwise it will follow taxonomy validation. |
| <Fully_qualified_name_<br>of_dto>                     | <Fully_qualified_name_<br>of_extended_validator> | ExtValidationConfig | This property is used to specify the extended validator class for a specific DTO.                                                                                                                                                              |

## Key Things to note for Taxonomy Validation

This topic provides information on **Key Things to note for Taxonomy Validation**.

1. Taxonomy validation is applied to all non-static private fields. . Exceptions: Fields of types extending DataTransferObject, ENUM fields.
2. The fields should have appropriate getter method.
  - a. For Boolean – the getter method should be 'is<Fieldname>' (e.g. isShared)
  - b. For other types – the getter should be 'get<Fieldname>' (e.g. getPartyId)
3. If any field in the DTO is of type of an object which extends Validatable Class, the corresponding validator class will be responsible for its field validation.
4. For fields that do not require any specific data type validation, data type 'FREETEXT' can be mapped.
5. For list type of fields the validation will be done in loop, validating each field as per taxonomy definition.
6. In validationError, the structure of the error object is as follows-

```
{
  "objectName": <fully qualified name of the DTO on which validate
method is called>,
  "attributeName": < the field in which the validation has failed>,
  "errorCode": <error code>,
  "errorMessage": <locale specific message for the errorCode>
}
```

For list of objects or fields the attribute name will have an index concatenated by '#' in attributeName.

# 11

## Templates

This topic provides information on **Templates**.

### 1. Template to define Extended DTO validator

- DTO name: com.ofss.digx.app.test.TestDTO
- Default validator: com.ofss.digx.app.test.TestDTOValidator
- Extended DTO validator: com.ofss.cz.app.test.ExtTestDTOValidator

```
package com.ofss.cz.app.finlimit.dto.limitpackage;
import java.util.List;
import com.ofss.digx.app.dto.validator.IDTOValidator;
import com.ofss.fc.app.dto.validation.IValidatable;
import com.ofss.fc.infra.validation.error.ValidationErrors;
public class ExtTestDTOValidator extends
com.ofss.digx.app.test.TestDTOValidator
implements IDTOValidator
{
    protected ExtTestDTOValidator()
    {
    }
    public static ExtTestDTOValidator getInstance()
    {
        return ExtTestDTOValidatorHolder.INSTANCE;
    }
    private static class ExtTestDTOValidatorHolder
    {
        private static final ExtTestDTOValidator INSTANCE = new
ExtTestDTOValidator();
    }
    @Override public void validateInput
(
        IValidatable validatable,
        String key, String parentName,
        List<ValidationErrors>
        validationErrors
    )
    {
        LOGGER.log(Level.SEVERE,
FORMATTER.formatMessage
(
    "Class : %s, Entering into the customized class and calling digx
class ",
    THIS_COMPONENT_NAME));
        super.validateInput(validatable, key, parentName,
validationErrors);
        // Provide the required addiotion validation for the DTO. Add
the required errors
        in validationErrors for the failed cases.
    }
}
```

```
    }
}
```

## 2. Template to define taxonomy data type validator

**Data Type: TESTTYPE**

**Validator: TestTypeValidator**

```
package com.ofss.digx.app.dto.validator.taxonomy;
import java.util.List;
import com.ofss.digx.app.dto.validator.ITaxonomyValidator;
import com.ofss.digx.app.dto.validator.ValidationData;
import com.ofss.fc.infra.validation.error.ValidationError; public class
TestTypeValidator
implements ITaxonomyValidator
{
    private TestTypeValidator()
    {
    }
    private static class TestTypeValidatorHolder
    {
        private static final TestTypeValidator INSTANCE = new
TestTypeValidator();
    }
    /**
     * @return unique instance of {@link TestTypeValidator} */
    public static TestTypeValidator getInstance()
    {
        return TestTypeValidatorHolder.INSTANCE;
    }
    @Override public void validate
    (
        ValidationData data, Object val, String parentName,String
fieldKey,
        List<ValidationError> validationErrors)
    {
        if (val != null)
        {
            if (val instanceof <Type of the object>)
            {
                < Type of the object > value = (<Type of the object >)
val;
                if (<validation_case>)
                {
                    validationErrors.add
                    (new ValidationError(parentName, fieldKey, null,
data.getErrorCode(), null));
                }
                else
                {
                    validationErrors.add
                    (new ValidationError(parentName, fieldKey, null,
"DIGX_INVALID_VALUE_TYPE",null));
                }
            }
        }
    }
}
```

```

    }
  }
}

```

### 3. Template to define validator for custom data type

```

package com.ofss.digx.app.dto.validator.taxonomy;
import java.util.List;
import java.util.logging.Level;
import java.util.logging.Logger;
import java.util.prefs.Preferences;
import com.ofss.digx.app.dto.validator.ITaxonomyValidator;
import com.ofss.digx.app.dto.validator.TaxonomyHandler;
import com.ofss.digx.app.dto.validator.TaxonomyValidatorFactory;
import com.ofss.digx.app.dto.validator.ValidationData;
import com.ofss.digx.enumeration.validator.TaxonomyCategory;
import com.ofss.fc.datatype.PostalAddress;
import com.ofss.fc.infra.config.ConfigurationFactory;
import com.ofss.fc.infra.log.impl.MultiEntityLogger;
import com.ofss.fc.infra.validation.error.ValidationError;
/** * Validation class for complex type @AmountRange */public class
PostalAddressValidator implements ITaxonomyValidator {
    private static final String THIS_COMPONENT_NAME =
PostalAddressValidator.class.getName();
    private static final Logger LOGGER =
MultiEntityLogger.getUniqueInstance().getLogger(THIS_COMPONENT_NAME);
    private static final MultiEntityLogger FORMATTER =
MultiEntityLogger.getUniqueInstance();
    /**      * Constant to hold validation configuration preference name
    */
    private static final String VALIDATION_CONFIGURATION =
"ValidationConfig";
    /**      * Fully qualified name of the default length validator class
    */
    private static final String LENGTH_VALIDATOR =
"LENGTH_VALIDATOR"; /**
    * Fully qualified name of the default length validator class      */
    private static final String DEFAULT_LENGTH_VALIDATOR =
"com.ofss.digx.app.dto.validator.taxonomy.LengthValidator";
    /**      * private Constructor      */
    private PostalAddressValidator()
    {
    }
    private static class PostalAddressValidatorHolder
    {
        private static final PostalAddressValidator INSTANCE = new
PostalAddressValidator();
    }
    /**      * @return unique instance of {@link PostalAddressValidator}
    */
    public static PostalAddressValidator getInstance()
    {
        return PostalAddressValidatorHolder.INSTANCE;
    }
    /**      *      */
    @Override public void validate

```

```

        (ValidationData data, Object val, String parentName,
         String fieldKey,
         List<ValidationError> validationErrors)
        {
            if (LOGGER.isLoggable(Level.FINE))
            {
                LOGGER.log(Level.FINE, FORMATTER.formatMessage
                ( "Complex Data Type validation inside Class : %s,
for Field : %s", THIS_COMPONENT_NAME, fieldKey));
            }
            PostalAddress v = (PostalAddress) val;

            validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALA
DDRESS.line1." + data.getLocale()),
                        v.getLine1(), parentName, fieldKey + ".line1",
validationErrors);

            validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALA
DDRESS.line2." + data.getLocale()),
                        v.getLine2(), parentName, fieldKey + ".line2",
validationErrors);

            validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALA
DDRESS.line3." + data.getLocale()),
                        v.getLine3(), parentName, fieldKey +
".line3", validationErrors);

            validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALA
DDRESS.line4." + data.getLocale()),
                        v.getLine4(), parentName, fieldKey +
".line4", validationErrors);

            validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALA
DDRESS.line5." + data.getLocale()),
                        v.getLine5(), parentName, fieldKey +
".line5", validationErrors);

            validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALA
DDRESS.line6." + data.getLocale()),
                        v.getLine6(), parentName, fieldKey + ".line6",
validationErrors);

            validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALA
DDRESS.line7." + data.getLocale()),
                        v.getLine7(), parentName, fieldKey + ".line7",
validationErrors);

            validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALA
DDRESS.line8." + data.getLocale()),
                        v.getLine8(), parentName, fieldKey + ".line8",
validationErrors);

            validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALA
DDRESS.line9." + data.getLocale()),
                        v.getLine9(), parentName, fieldKey + ".line9",
validationErrors);

```

```

        validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALADDRESS.line10." + data.getLocale()),
            v.getLine10(), parentName, fieldKey + ".line10",
            validationErrors);

        validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALADDRESS.line11." + data.getLocale()),
            v.getLine11(), parentName, fieldKey + ".line11",
            validationErrors);

        validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALADDRESS.line12." + data.getLocale()),
            v.getLine12(), parentName, fieldKey + ".line12",
            validationErrors);

        validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALADDRESS.city." + data.getLocale()),
            v.getCity(), parentName, fieldKey +
            ".city", validationErrors);

        validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALADDRESS.state." + data.getLocale()),
            v.getState(), parentName, fieldKey + ".state",
            validationErrors);

        validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALADDRESS.country." + data.getLocale()),
            v.getCountry(), parentName, fieldKey + ".country",
            validationErrors);

        validateField(TaxonomyHandler.getInstance().getValidationMap().get("POSTALADDRESS.postalCode." + data.getLocale()),
            v.getPostalCode(), parentName, fieldKey +
            ".postalCode", validationErrors);
    }

    /**
     * Validate individual field of the complex data type {@link
     * PostalAddress}
     *
     * @param data      * @param value      * @param parentName      * @param
     * key      * @param validationErrors      */
    private void validateField(ValidationData data, String value, String
        parentName, String key, List<ValidationError> validationErrors)
    {
        Preferences validationFactoryConfigurator =
        ConfigurationFactory.getInstance()
            .getConfigurations(VALIDATION_CONFIGURATION);
        ITaxonomyValidator lengthValidator =
        TaxonomyValidatorFactory.getInstance()
            .getValidator(validationFactoryConfigurator.get(LENGTH_VALIDATOR,
            DEFAULT_LENGTH_VALIDATOR));
        if (value == null)
        {
            if (data.isMandatory()
            )
            {
                validationErrors.add(new ValidationError(parentName, key, null,

```

```
data.getMandatoryErrorCode(), null));
    }
    }
    else
    {
        if (data.getMinLength() != null || data.getMaxLength() != null)
        {
            lengthValidator.validate(data, value, parentName, key,
validationErrors);
        }
        ITaxonomyValidator validator =
TaxonomyValidatorFactory.getInstance().getValidator(data.getClassName());

        if (validator != null)
        {
            validator.validate(data, value, parentName, key,
validationErrors);
        }
    }
}
@Override public final TaxonomyCategory getCategory()
{
    return TaxonomyCategory.OTHER;
}
}
```

# Configuring Taxonomy Validation in UI

This topic describes the systematic instruction to **Configuring Taxonomy Validation in UI** option.

To integrate the taxonomy based validation in UI components following steps are required for migration from earlier UI based validations.

## View Model

Create **taxonomyDefinition** instance by calling **getTaxonomyDefinition** method from dashboard.

It accepts the name of the DTO as the only argument.

A REST call to fetch taxonomy details will be performed for each invocation of **getTaxonomyDefinition**.

```
self.taxonomyDefinition = rootParams.dashboard.getTaxonomyDefinition("com.ofss.digx.some.dto.here");
```

## HTML

**getTaxonomyValidator** function accepts **taxonomyDefinition** created in the View Model as first argument, and **idField** to search within **taxonomyDefinition** as second argument, and element selector as the third argument.

```
<oj-input-text  
  id="elementIdentifier"  
  async-validators="[[[$baseModel.getTaxonomyValidator($component.taxonomyDefinition,  
    'accessPointValue', '#elementIdentifier')]]]">  
</oj-input-text>
```

# Utility to generate Validators

This topic provides information on **Utility to generate Validators**.

Once the taxonomy validation is enabled for a request DTO, it is mandatory to have a taxonomy validator for the same in the application.

A utility has been provided to generate the validators for such request DTOs. This section describes the steps to be followed to generate the validators using this utility.

## Prerequisites:

1. The machine should have JDK version 1.7 or above installed
2. The project having the custom request DTOs must be ready
3. Supporting jars as mentioned below
  - a. com.ofss.digx.appcore.dto.jar – (available in 'obdx.app.framework.ear')
  - b. com.ofss.fc.infra.jar – (available in 'obdx.app.core.domain.ear')
  - c. com.ofss.fc.appcore.dto.jar – (available in 'obdx.app.core.domain.ear')
  - d. Any other jars required for compilation of project containing custom request DTOs

## Running the Utility:

This section explains step by step process to generate the validators using the utility.

**Step 1:** Copy the following artifacts from the <installer> to desired directory. This directory will be referred as <UTIL\_DIR>.

1. validator\_gen.bat (for Windows) OR validator\_gen.sh (for Linux)
2. lib folder – (contains pre-built jars required for utility)

Add the supporting jars as mentioned in the prerequisites (point no 3) in the lib folder.

**Step 2:** Go to < UTIL\_DIR > and open command prompt / terminal.  
Execute following command:

1. For Linux  
./validator\_gen.sh <BIN\_DIR> <UTIL\_DIR> <PROJECT\_DIR> <PACKAGE\_NAME>
2. For Windows  
/validator\_gen.bat <BIN\_DIR> <UTIL\_DIR> <PROJECT\_DIR> <PACKAGE\_NAME>.

Where,

<BIN\_DIR>: Path where JDK bin is located (e.g. C:\Program Files\Java\jdk1.8.0\_171\bin) (use " if the path contains spaces)

<PROJECT\_DIR>: path where request DTO project is located

<PACKAGE\_NAME>: name of the package where the source of request DTOs is located

Consider following example

If the customized request DTOs are located in  
'D:\workspaces\trunk\com.ofss.digx.cz.app.xface\src \com...'

Then, < PROJECT\_DIR > = 'D:\workspaces\trunk' and < PACKAGE\_NAME > = 'com.ofss.digx.cz.app.xface'

**Step 3:**

As a result of utility, a jar containing the compiled classes of validator files will be created in <UTIL\_DIR>. Copy the jar file and paste in the EAR file where the jar of customized DTO classes is located. Deploy the EAR file in the application and restart the server.

 **Note**

As the utility runs, it creates the source folder of the validator classes in <PROJECT\_DIR>. By default, this folder is deleted once the utility execution is completed. This source folder can be retained by following way.

Open 'validator\_gen.bat' or 'validator\_gen.sh' in notepad and set the value of variable 'isValidatorSourceRequired' to Y. Run the utility again. The source will available in <PROJECT\_DIR>.


# Manual to create Validators

This topic provides information on **Manual to create Validators**.


If the utility to generate validator is not available, following steps can be referred to create the request DTO validator manually. This can be created in the same workspace as that of request DTO.

## Project Creation for validators


1. Import the project containing customized DTO in eclipse workspace

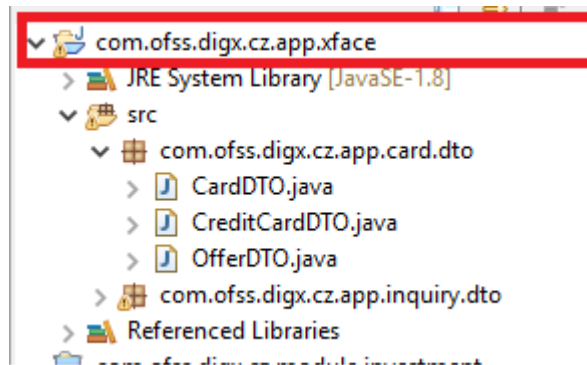

2. Create project in the workspace for validator classes. Name the project by appending '.validators' to the name of project containing DTOs

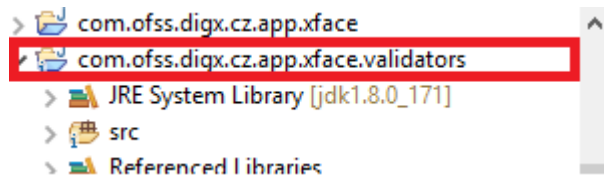

3. Create the validator class for each of the DTO. Maintain the same package structure as that of DTO project while creating the validator classes. To name the validator, use the DTO name appended with prefix 'Validator'.

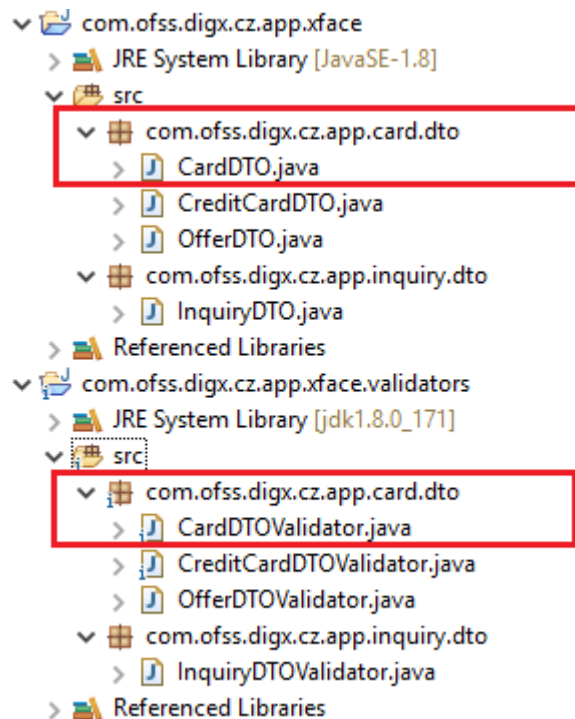

### Validator file creation

Use following steps to create validator class:

In this document, we will use CardDTO, OfferDTO, CreditCardDTO as example to create validators. CardDTO extends DataTransferObject and CreditCardDTO extends CardDTO.

For these DTOs, CardDTOValidator, OfferDTOValidator and CreditCardDTOValidator will be created.

Each validator class must extend a parent DTO validator class.

If Request DTO extends DataTransferObject then the validator class should extend 'com.ofss.digx.app.dto.validator.AbstractDTOValidator'.

E.g. public class CardDTOValidator extends AbstractDTOValidator implements IDTOValidator {

If request DTO extends another request DTO then the validator class should extends the validator class of parent DTO.

e.g. public class CreditCardDTOValidator extends CardDTOValidator implements IDTOValidator {

1. Each validator class must implement the interface 'com.ofss.digx.app.dto.validator.IDTOValidator'

Each validator should be a singleton class and must contain 'getInstance' method to return validator class instance. The class can be made singleton by any method. One of the method is given in following snippet.

```
protected CreditCardDTOValidator()
{
    } /**
    * @return instance of {@link CreditCardDTOValidator}.
    */
```

```

        public static CreditCardDTOValidator getInstance()
        {
            return CreditCardDTOValidatorHolder.INSTANCE;
        }
        /**
         *
         * The class holds the instance of {@link
CreditCardDTOValidator}.
         */
        private static class CreditCardDTOValidatorHolder
        {
            /**
             *
             * private instance variable {@value new
CreditCardDTOValidator()}.
             */
            private static final CreditCardDTOValidator INSTANCE = new
CreditCardDTOValidator();
        }

```

2. Validator class should override 'validateInput' with signature as given below:

```

@Override public void validateInput
(
    IValidatable validatable, String key, String
parentName, List<ValidationError> validationErrors
)
{

```

3. In 'validateInput' method: include following content in the beginning-

- a. `String parent = parentName != null ? parentName : validatable.getClass().getName();`  
`String fullKey = (key != null ? (key + ".") : "");`  
`super.validateInput(validatable, key, parent, validationErrors);`

(The super.validateInput validates the fields of parent class by calling parent validator's 'validateInput' method.

- b. 'validatable' parameter of 'validateInput' should be casted to DTO which we want to validate. For example, in case of CardDTOValidator, CardDTO is to be validated. Therefore, below code should be used for casting

```
CardDTO cardDTO = (CardDTO) validatable;
```

- c. Create a HashMap of String as key and Object as value as in below snippet

```
Map<String, Object> fieldsMap =new HashMap<String, Object>();
```

Add all fields of DTO in hashmap one by one.

'fullKey' appended with particular fieldname should be inserted as key of hashmap and corresponding field as value of hashmap .

For eg in case of CardDTO below snippet should be added to CardValidator

```
Map<String, Object> fieldsMap = new HashMap<String, Object>();
fieldsMap.put(fullKey + "id", cardDTO.getId());
fieldsMap.put(fullKey + "cvv", cardDTO.getCvv());
fieldsMap.put(fullKey + "active", cardDTO.isActive());
```

- d. If some DTO have other DTO in its attribute, then to validate attribute level DTO, corresponding DTOs validator should be called.  
For e.g. CardDTO contains a field cardProductDTO of type CardProductDTO. So CardValidator should have following snippet to validate field of type CardProductDTO.

```
if(cardDTO.getCardProductDTO() != null)
{
    DTOValidatorFactory.getInstance().getValidator(cardDTO.getCardProductDT
    O()).validateInput
    (cardDTO.getCardProductDTO(), fullKey + "cardProductDTO", parent,
    validationErrors);
}
fieldsMap.put(fullKey + "cardProductDTO", cardDTO.getCardProductDTO());
```

- e. If some DTO contains list of objects, include following snippet for its validation.

```
if(cardDTO.getOffers()
!= null && !cardDTO.getOffers().isEmpty())
{
    int dtoVarIndex = 0;
    for(OfferDTO dtoVar : cardDTO.getOffers())
    {

        DTOValidatorFactory.getInstance().getValidator(dtoVar).validateInput
        (dtoVar, fullKey + "offers#" + dtoVarIndex, parent,
        validationErrors);
        dtoVarIndex++;
    }

    fieldsMap.put(fullKey + "offers", cardDTO.getOffers()
    );
}
```

- f. Finally add following method to validate parameters.

```
DefaultDTOValidator.validateParams(fieldsMap, parent, validationErrors);
```

# Index

## C

---

Categories of taxonomy validators, [1](#)  
Configurations for taxonomy validation, [1](#)  
Configuring Taxonomy Validation in UI, [1](#)

## D

---

Data Type Definition, [1](#)

## E

---

Extended Validators, [1](#)

## H

---

Hierarchy to define field validation, [1](#)

## K

---

Key Things to note for Taxonomy Validation, [1](#)

## M

---

Manual to create Validators, [1](#)

## T

---

Taxonomy Validation Process, [1](#)  
Taxonomy Validation Table structure, [1](#)  
Templates, [1](#)

## U

---

Utility to generate Validators, [1](#)

## V

---

Validators for complex data type, [1](#)