

Oracle® Banking Microservices Architecture

Oracle Banking Multi-Entity Deployment Guide



Release 14.7.3.0.0

F94409-01

February 2024

The Oracle logo, consisting of a solid red square with the word "ORACLE" in white, uppercase, sans-serif font centered within it.

ORACLE®

Copyright © 2018, 2024, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Contents

Preface

Purpose	iv
Audience	iv
Documentation Accessibility	iv
Diversity and Inclusion	iv
Related Resources	v

1 Overview

1.1	Deployment Diagram	1-1
1.2	Entity Creation	1-3
1.2.1	Default Entity Creation	1-3
1.2.2	Single Entity Setup	1-4
1.2.2.1	View Entities	1-4
1.2.3	Multi Entity Setup	1-7
1.2.3.1	Create Entity	1-8
1.2.3.2	View Entities	1-11
1.3	Users	1-12
1.3.1	Create User	1-12
1.3.2	View Users	1-14
1.4	Switch Between Entities	1-15

Index

Preface

- [Purpose](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Diversity and Inclusion](#)
- [Related Resources](#)

Purpose

This guide describes the approach that could be considered as a reference, while moving into multi-entity model.

Audience

This guide is intended for WebLogic admin or ops-web team who are responsible for installing the OFSS banking products.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Related Resources

For more information, refer to the following documents:

- [Product Installation Guide](#)

1

Overview

This topic describes about the overview for Multi Entity feature.

Banks have multiple implementations across geographies that support Multiple entities.

Multi Entity: This feature introduced to Oracle Banking Microservices Architecture products, which enables a single instance of the product (and the underlying Oracle Banking Microservices Architecture platform) to onboard the multiple entities of the bank onto the platform.

As part of the **Multi-Entity** feature, below are the functionality supported in all Oracle Banking Microservices Architecture products.


- Creation of "Multi-Entity Admin" user(s)
- Entity Definition and Maintenance
- Creation of "Entity Admin" User(s) & regular users
- Mapping of users (entity admins or regular users) to one or more entities - The users of the application will be central in nature and users can have access to one or more entities.
- User Entitlement will be local to the entity
- [Deployment Diagram](#)
This topic describes about the deployment diagram for Multi-Entity based deployment model.
- [Entity Creation](#)
This topic describes about the various entity creations for Multi-Entity feature.
- [Users](#)
This topic describes the information to configure a new users.
- [Switch Between Entities](#)
This topic describes about the information to switch between entities.

1.1 Deployment Diagram

This topic describes about the deployment diagram for Multi-Entity based deployment model.

Deployment diagram depicts Multi-Entity based deployment model. Entities based on geographies are considered as an example in the deployment diagram.

Figure 1-1 Deployment Diagram

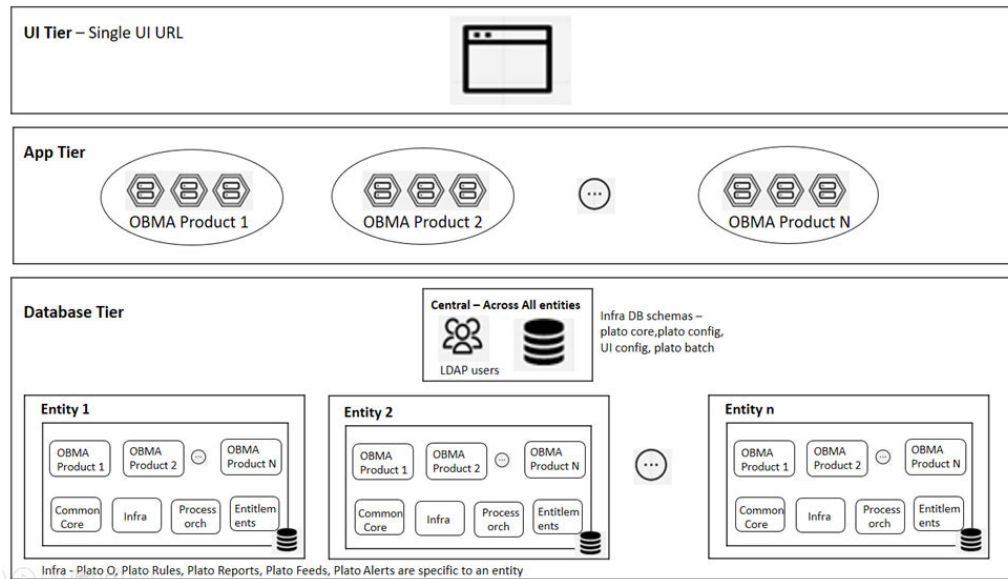

UI Tier – UI Domain will be shared across multiple entities for a bank and the same UI URL will be used.

A user can map to one or more entities and a single home entity. During login, the user redirects to the home entity, and an option is provided to switch any of the other associated entities.

Multi Entity admin user has the special access to create/modify new entities in the system.

App Tier – One or more managed servers that host all the microservices are to be deployed for a product.

This includes the below list:

- Infrastructure services – Plato Infra services (Plato Discovery, Plato API Gateway, Plato Batch, etc...) that are used across all products
- SMS service – for Role Based Authorization
- Common Core and Mid-office Common core services - Common domain related services that are used across by one or more products
- Domain services – micro-services related to Oracle Banking Microservices Architecture products (Oracle Banking Trade Finance Process Management, Oracle Banking Credit Facilities Process Management, Oracle Banking Liquidity Management, Oracle Banking Virtual Account Management, etc...)

Same as UI tier and App tier will be shared across multiple entities. Based on the entity ID provided in the request header, DB schema to the entity will be accessed for all CRUD operations.

Database Tier – The segregation of entities should be done in the DB layer. Separate DB schemas should be defined and used for the entities.

Below are shared across multiple entities:

- LDAP users
- few infrastructure related DB schemas - Plato Config, Plato UI config, Plato core, and Plato Batch

Below schemas will NOT be shared and should be specific to an entity:

- Infra related schemas - Plato O, Plato Rules, Plato Reports, Plato Feeds, and Plato Alerts
- User entitlements – SMS schema
- Common core schema
- Product specific DB schemas (each product will have multiple schemas; ideally 1 schema per microservice/sub-domain)

Banks that have a single entity should follow the same architecture but with "DEFAULT_ENTITY" configured in the system.

1.2 Entity Creation

This topic describes about the various entity creations for Multi-Entity feature.

- [Default Entity Creation](#)
This topic describes about the default entity creation.
- [Single Entity Setup](#)
This topic provides the systematic instruction to setup the single entity for the bank.
- [Multi Entity Setup](#)
This topic provides the systematic instruction to setup the multi entity for the bank.

1.2.1 Default Entity Creation

This topic describes about the default entity creation.

During environment setup, when microservices are deployed, DMLs/DDLS related to "DEFAULT_ENTITY" will be executed through flyway scripts.

Multi entity Admin user should be created as mentioned in **Multi Entity Admin User Creation** section in **Oracle Banking Microservices Platform Foundation Installation Guide**.



Note:

Two Multi entity admin users must be created to manage and authorize entity and users in the system.

The bank must pre-determine if the application will be set-up as single or multiple entity system based on the actual implementation requirement. User can directly refer the [Single Entity Setup](#) or [Multi Entity Setup](#) topics. By default, the system will create an entity with name **DEFAULTENTITY** and the name is allowed to be modified only once and must be manually controlled.

1.2.2 Single Entity Setup

This topic provides the systematic instruction to setup the single entity for the bank.

1. Bank can modify the existing DEFAULTENTITY created by system during application set-up.
2. Before modifying the default entity, DB schemas corresponding to various domains should be identified and corresponding “Data Sources” should be created in Weblogic server.

Figure 1-2 Data Sources (Filtered - More Columns Exist)

Data Sources (Filtered - More Columns Exist)				
New ▾ Delete				
<input type="checkbox"/>	Name ↕	Type	JNDI Name	Targets
<input type="checkbox"/>	CMCE1	Generic	jdbc/CMCE1	cmc_server1, cmc_server2
<input type="checkbox"/>	CMNCORE	Generic	jdbc/CMNCORE	cmc_server1, cmc_server2
<input type="checkbox"/>	PLATO	Generic	jdbc/PLATO	cmc_server1, cmc_server2
<input type="checkbox"/>	PLATO_UL_CONFIG	Generic	jdbc/PLATO_UL_CONFIG	cmc_server1, cmc_server2
<input type="checkbox"/>	SMS	Generic	jdbc/sms	cmc_server1, cmc_server2
<input type="checkbox"/>	SMSE1	Generic	jdbc/SMSE1	cmc_server1, cmc_server2

3. Once the Data Sources are mapped with the corresponding DB schemas and servers, restart the PLATO, CMC, SMS, and other required managed servers.
 4. Check and verify in Eureka to see if all the services are up and running.
- [View Entities](#)
This topic describes the systematic instructions to view and modify the single entity.

1.2.2.1 View Entities

This topic describes the systematic instructions to view and modify the single entity.

The user can configure an entity using the [Create Entity](#) screen.

Specify **User ID** and **Password**, and login to **Home** screen with the multi entity admin user.

1. On **Home** screen, click **Entities**. Under **Entities**, click **View Entities**.

The **View Entities** screen displays.

Figure 1-3 View Entities

The screenshot shows a web interface titled "View Entities". At the top left, there is a "Filter:" section with a text input field labeled "Type to filter" and a search icon. Below this is a table with two columns: "Entity Id" and "Entity Name". The table contains two rows of data:

Entity Id	Entity Name
AVDRENTITY	AVDRENTITY
DEFAULTENTITY	DEFAULTENTITY

2. On **View Entities** screen, view the entity details.
For more information on fields, refer to the field description table.

Table 1-1 View Entities – Field Description

Field	Description
Entity Id	Displays the entity Id of the entity.
Entity Name	Displays the name of the entity.

3. Right-click on **DEFAULTENTITY** and select the **View** details.
The **Create Entity** screen displays.

Figure 1-4 Create Entity

The screenshot shows a web interface titled "Create Entity". It contains several input fields for entity details:

- Entity Id:** DEFAULTENTITY
- Entity Name:** DEFAULTENTITY
- HO Branch Code:** SAN
- HO Branch Name:** SAN FRANCISCO HO
- Source System HO Branch Code:** SAN
- Host Code:** FCUBS
- Country:** United States of America (the)
- Currency Code:** USA
- Current HO Branch Posting Date:** June 2, 2025
- Previous HO Branch Posting Date:** June 1, 2025
- Bank Name:** WELLS FARGO BANK
- Bank Code:** WFBK
- Bank Code:** RW
- Next HO Branch Posting Date:** June 5, 2025
- Region Code:** RW

Below these fields is a section titled "Application JNDI Mapping" with a table:

Application Id	JNDI
CMNCORE	jdbc/CMNCORE
ICL	jdbc/ICL
LMA	jdbc/LMA
LMB	jdbc/LMB
LMC	jdbc/LMC

At the bottom of the page, there is a "Save" button and a pagination control showing "Page 1 of 5 (1-5 of 25 items)".

 **Note:**

Entity once it is updated, further modification is allowed only to the specific fields like Entity Name and Region Code.

4. On the **Create Entity** screen, modify the fields.

 **Note:**

The fields marked as **Required** are mandatory.

For more information on fields, refer to the field description table.

Table 1-2 Create Entity – Field Description

Field	Description
Entity Id	Specify the entity Id for the entity.
Entity Name	Specify the name of the entity.
HO Branch Code	Specify the head office branch code of the entity.
HO Branch Name	Specify the head office branch name of the entity.
HO Branch Address	Specify the head office branch address of the entity.
Host Code	Specify the host code.
Country	Select the head office branch country code.
Current HO Branch Posting Date	Select the head office branch current posting date.
Previous HO Branch Posting Date	Select the head office branch previous posting date.
Next HO Branch Posting Date	Select the head office branch next posting date.
Bank Name	Specify the bank name.
Bank Code	Specify the bank code.
Application Id	Click Search icon to view and select the required application ID's from the list.
JNDI	Specify the JNDI for the application ID.

 **Note:**

The default entity name value **DEFAULTENTITY** name can be modified only once and must be manually controlled.

5. Select the required application id and map it with the new JNDI configured in weblogic.
6. As part of entity creation through app-shell, JNDI names for each of the applications should be provided.
7. Click **Save**. The user can view the confirmation entity details in the **View Entities** screen.

8. On **Save** button, the following common core maintenance data will get created automatically which can be enhanced further after the creation of the entity admin users.
 - Country code
 - Currency definition
 - Language code
 - Bank
 - Branch
 - Branch System date
 - Host code
9. The following processes will execute in the background.
 - The entity details will be saved in the PLATO_TM_ENTITY table.
 - The JNDIs will be saved in the APPLICATION_LEDGER table.
 - The flyway scripts for all the micro services will get executed in their respective schemas.
 - Once the flyway execution is completed a new role “ENTITY_ADMIN” will be created in the entity. This step will insert scripts into the following tables:
 - SMS_TM_ROLE
 - SMS_TW_ROLE
 - SMS_TM_ROLE_ACTIVITY
 - SMS_TW_ROLE_ACTIVITYThis role will be assigned to the entity admin user in the user creation step. For more details, refer to [Create User](#) topic.
 - The Head Office branch details will be inserted into the CMC_TM_CORE_BRANCH and CMC_TW_CORE_BRANCH tables.
 - The Bank details will be inserted into the CMC_TM_CORE_BANK and CMC_TW_CORE_BANK tables.
 - The System dates will be inserted into the CMC_TM_SYSTEM_DATES and CMC_TW_SYSTEM_DATES tables.

1.2.3 Multi Entity Setup

This topic provides the systematic instruction to setup the multi entity for the bank.

1. The system by default will have an entity as **DEFAULTENTITY**. In multi-entity scenario, the bank can rename the **DEFAULTENTITY** to one of its entities in multi-entity setup. Refer the above section 2.2.2 for steps to modify the default entity.
2. Before creating new entities through the application, DB schemas corresponding to various domains should be identified and corresponding “Data Sources” should be created in Weblogic server.

Figure 1-5 Data Sources (Filtered - More Columns Exist)

Data Sources (Filtered - More Columns Exist)				
New <input type="button" value="Delete"/>				
<input type="checkbox"/>	Name <input type="button" value="↕"/>	Type	JNDI Name	Targets
<input type="checkbox"/>	CMCE1	Generic	jdbc/CMCE1	cmc_server1, cmc_server2
<input type="checkbox"/>	CMNCORE	Generic	jdbc/CMNCORE	cmc_server1, cmc_server2
<input type="checkbox"/>	PLATO	Generic	jdbc/PLATO	cmc_server1, cmc_server2
<input type="checkbox"/>	PLATO_UI_CONFIG	Generic	jdbc/PLATO_UI_CONFIG	cmc_server1, cmc_server2
<input type="checkbox"/>	SMS	Generic	jdbc/sms	cmc_server1, cmc_server2
<input type="checkbox"/>	SMSE1	Generic	jdbc/SMSE1	cmc_server1, cmc_server2

New

- Once the Data Sources are mapped with the corresponding DB schemas and servers, restart the PLATO, CMC, SMS, and other required managed servers.
 - Check and verify in Eureka to see if all the services are up and running.
- [Create Entity](#)
This topic describes the systematic instructions to configure a new entity for multi entity admins.
 - [View Entities](#)
This topic describes the systematic instructions to view the list of all entities.

1.2.3.1 Create Entity

This topic describes the systematic instructions to configure a new entity for multi entity admins.

Specify **User ID** and **Password**, and login to **Home** screen with the newly created entity admin user.

- On **Home** screen, click **Entities**. Under **Entities**, click **Create Entity**.
The **Create Entity** screen displays.

Figure 1-6 Create Entity

Create Entity
⌵ ×

Entity Creation

<input type="text" value="Entity Id"/>	<input type="text" value="Entity Name"/>	<input type="text" value="HO Branch Code"/>	<input type="text" value="HO Branch Name"/>
<input type="text" value="Ho Branch Address"/> <small>Required</small>	<input type="text" value="Source System HO Branch Code"/> <small>Required</small>	<input type="text" value="Host Code"/> <small>Required</small>	<input type="text" value="Country"/> <small>Required</small>
<input type="text" value="Currency Code"/> <small>Required</small>	<input type="text" value="Current HO Branch Posting Date"/> <small>Required</small>	<input type="text" value="Previous HO Branch Posting Date"/> <small>Required</small>	<input type="text" value="Next HO Branch Posting Date"/> <small>Required</small>
<input type="text" value="Bank Name"/> <small>Required</small>	<input type="text" value="Bank Code"/> <small>Required</small>	<input type="text" value="Region Code"/> <small>Required</small>	

Application JNDI Mapping

Application Id	JNDI
No data to display.	

Page 1 (0 of 0 items) < 1 >

 **Note:**

Entity once it is updated, further modification is allowed only to the specific fields like Entity Name and Region Code.

- Specify the fields on **Create Entity** screen.

 **Note:**

The fields marked as **Required** are mandatory.

For more information on fields, refer to the field description table.

Table 1-3 Create Entity – Field Description

Field	Description
Entity Id	Specify the entity Id for the entity.
Entity Name	Specify the name of the entity.
HO Branch Code	Specify the head office branch code of the entity.
HO Branch Name	Specify the head office branch name of the entity.
HO Branch Address	Specify the head office branch address of the entity.
Host Code	Specify the host code.
Country	Select the head office branch country code.
Current HO Branch Posting Date	Select the head office branch current posting date.
Previous HO Branch Posting Date	Select the head office branch previous posting date.
Next HO Branch Posting Date	Select the head office branch next posting date.
Bank Name	Specify the bank name.
Bank Code	Specify the bank code.
Application Id	Click Search icon to view and select the required application ID's from the list.
JNDI	Specify the JNDI for the application ID.

- Click **+** to add multiple application JNDI mappings.
- Click **-** to remove an application JNDI mapping.
- Click **Save** to save the details.

The entity is successfully created and can be viewed using the [View Entity](#) screen.

- Select the required application id and map it with the new JNDI configured in weblogic.
- Click **Upload DSL** button to upload all application ids with JNDI.

Example DSL Format

```
[
  {
    "appId": "CMNCORE",
```

```

    "jndi": "jdbc/CMNCOREKW"
  },
  {
    "appId": "sms",
    "jndi": "jdbc/SMSCOREKW"
  },
  {
    "appId": "SECSRV001",
    "jndi": "jdbc/PLATO_SECURITY"
  },
  {
    "appId": "UICFGSRV001",
    "jndi": "jdbc/PLATO_UI_CONFIG"
  },
  {
    "appId": "LMA",
    "jndi": "jdbc/LMAKW"
  }
]

```

The **Create Entity** screen with JNDI Mapping displays.

Figure 1-7 Create Entity - JNDI Mapping

The screenshot shows the 'Create Entity' interface. The 'Entity Creation' section includes fields for Entity Id (DEFAULTENTITY), Entity Name (DEFAULTENTITY), HO Branch Code (SAN), HO Branch Name (SAN FRANCISCO HO), HO Branch Address (SAN CALIFORNIA), Source System HO Branch Code (SAN), Host Code (FCBIS), Currency Code (USA), Current HO Branch Posting Date (June 2, 2023), Previous HO Branch Posting Date (June 1, 2023), Bank Name (WELLS FARGO BANK), Bank Code (WFBK), and Region Code (RIV). The 'Application JNDI Mapping' section displays a table with the following data:

Application Id	JNDI
CMNCORE	jdbc/CMNCORE
ICL	jdbc/ICL
LMA	jdbc/LMA
LMB	jdbc/LMB
LMC	jdbc/LMC

8. On **Save** button, the following common core maintenance data will get created automatically which can be enhanced further after the creation of the entity admin users.
 - Country code
 - Currency definition
 - Language code
 - Bank
 - Branch
 - Branch System date
 - Host code
9. The following processes will execute in the background.

- The entity details will be saved in the PLATO_TM_ENTITY table.
- The JNDIs will be saved in the APPLICATION_LEDGER table.
- The flyway scripts for all the micro services will get executed in their respective schemas.
- Once the flyway execution is completed a new role “ENTITY_ADMIN” will be created in the entity. This step will insert scripts into the following tables:
 - SMS_TM_ROLE
 - SMS_TW_ROLE
 - SMS_TM_ROLE_ACTIVITY
 - SMS_TW_ROLE_ACTIVITY

This role will be assigned to the entity admin user in the user creation step. For more details, refer to [Create User](#) topic.
- The Head Office branch details will be inserted into the CMC_TM_CORE_BRANCH and CMC_TW_CORE_BRANCH tables.
- The Bank details will be inserted into the CMC_TM_CORE_BANK and CMC_TW_CORE_BANK tables.
- The System dates will be inserted into the CMC_TM_SYSTEM_DATES and CMC_TW_SYSTEM_DATES tables.

1.2.3.2 View Entities

This topic describes the systematic instructions to view the list of all entities.


The user can configure an entity using the [Create Entity](#) screen.

Specify **User ID** and **Password**, and login to **Home** screen.

1. On **Home** screen, click **Entities**. Under **Entities**, click **View Entities**.

The **View Entities** screen displays.

Figure 1-8 View Entities

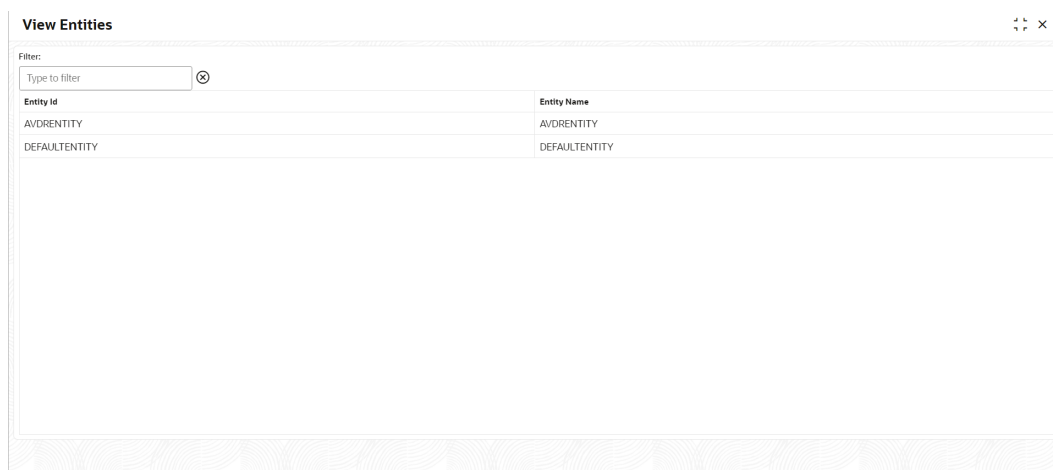

Entity Id	Entity Name
AVDRENTITY	AVDRENTITY
DEFAULTENTITY	DEFAULTENTITY

2. On **View Entities** screen, view the entity details.

For more information on fields, refer to the field description table.

Table 1-4 View Entities – Field Description

Field	Description
Entity Id	Displays the entity Id of the entity.
Entity Name	Displays the name of the entity.

1.3 Users

This topic describes the information to configure a new users.

Multi entity admins can create entity admins and users.

This topic contains the following subtopics:

- [Create User](#)
This topic describes the systematic instructions for the multi entity admins to configure a new user.
- [View Users](#)
This topic describes the systematic instructions to view the list of configured users.

1.3.1 Create User

This topic describes the systematic instructions for the multi entity admins to configure a new user.

Specify **User ID** and **Password**, and login to **Home** screen.

1. On **Home** screen, click **Users**. Under **Users**, click **Create User**.

The **Create User** screen displays.

Figure 1-9 Create User

Note:

In case of a single entity setup, there will be only one mapping to DEFAULTENTITY where as in case of multi-entity setup, a single user can be mapped to multiple entities. At least, one entity must be marked as default home entity. User will login with default home entity in case of multiple entities.



- Specify the fields on **Create User** screen.

 **Note:**

The fields marked as **Required** are mandatory.

For more information on fields, refer to the field description table.

Table 1-5 Create User – Field Description

Field	Description
User Id	Specify the user ID.
User Name	Specify the user name.
Locale	Specify the user locale.
Email ID	Specify the user email ID.
Start Date	Select the user start date. <p> Note: The start date of the user should greater than the Current HO Branch Posting Date.</p>
End Date	Select the user end date.
Entity Id	Click Search and select the entity to which the user belongs.
Home Entity	Select whether the entity is user home entity. <p> Note: Only one entity can be selected as Home Entity for a user.</p>
Entity Admin	Select whether the user is an entity admin of the entity. Marking a user as Entity Admin will give rights to the user to perform the following actions when logged in to that entity. <ul style="list-style-type: none"> • Modify the details of the users in the entity. • Create branches in the entity • Create roles in the entity. • Assign the roles and branches to the users.

- Click **+** to add a row and provide the required details.
- Click **Save** to save the details.

The user is successfully created and can be viewed using the [View User](#) screen.

 **Note:**

Entity Admin option must be enabled to create an administrator user for an entity.

Create LDAP User Account for the new user

1. Entity admin user will have default access to these core maintenance and security management screen.

Core Maintenance

- Currency definition
- Country code
- Language code
- Local Holiday
- System Dates
- External Branch Parameters
- External Bank Parameters
- Host code

Security Management

- Role
 - User
2. The core maintenances which are automatically created during the creation of an entity can be enhanced further by entity admin user. User can also perform new core maintenance for the new entity. For more information on **Core Maintenance**, refer to the **Common Core User Guide**.

Create Normal User

1. Normal users can be created in **Create User** screen by disabling **Entity Admin** toggle.
2. Unlock and enrich the normal users created by mapping the required user role branches and user applications. Authorize the same. For more information, refer to the **Oracle Banking Security Management System User Guide**.


1.3.2 View Users

This topic describes the systematic instructions to view the list of configured users.

The user can configure an user using the [Create User](#) screen.

Specify **User ID** and **Password**, and login to **Home** screen.

1. On **Home** screen, click **Users**. Under **Users**, click **View Users**.
The **View Users** screen displays.

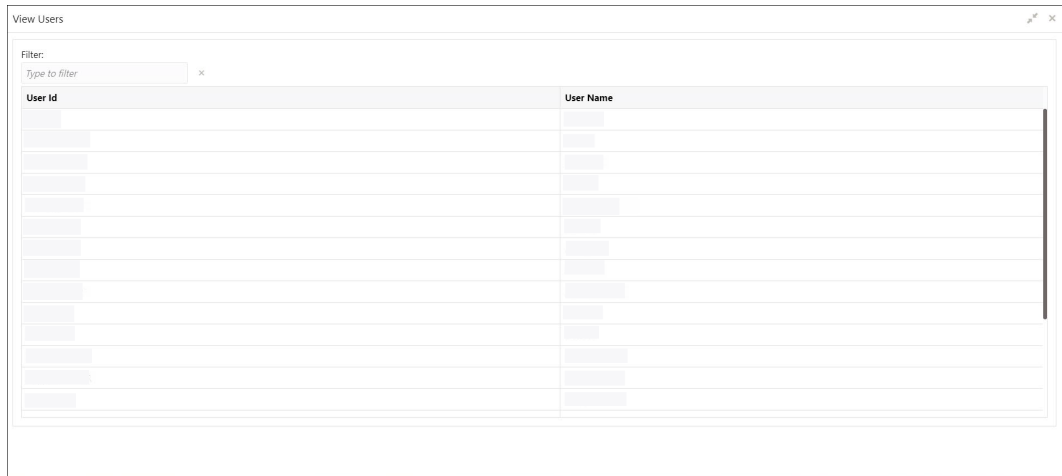Figure 1-10 View Users

2. Displays the details from **View Users** screen.

For more information on fields, refer to the field description table.

Table 1-6 View Users – Field Description

Field	Description
User Id	Displays the user ID.
User Name	Displays the user name.

1.4 Switch Between Entities

This topic describes about the information to switch between entities.

1. User can be mapped to one or more entities during the user creation, but only one among the entities should be made as **Home Entity**.
2. If a user is mapped to 2 or more entities, then the user is allowed to switch between the entities.
3. Users can switch between the entities only if :
 - a. Same user should be available across the entities.
 - b. Same branch should be available across the entities.
 - c. User should have proper user role branch mapping done.

Index

C

Create Entity, [1-8](#)
Create User, [1-12](#)

D

Default Entity Creation, [1-3](#)
Deployment Diagram, [1-1](#)

E

Entity Creation, [1-3](#)

M

Multi Entity Setup, [1-7](#)

O

Overview, [1-1](#)

S

Single Entity Setup, [1-4](#)
Switch Between Entities, [1-15](#)

U

Users, [1-12](#)

V

View Entities, [1-4](#), [1-11](#)
View Users, [1-14](#)