

Oracle® Banking Treasury Management Installer Property File



Release 14.7.5.0.0

G16680-01

September 2024

The Oracle logo, consisting of a solid red square with the word "ORACLE" in white, uppercase, sans-serif font centered within it.

ORACLE®

Oracle Banking Treasury Management Installer Property File, Release 14.7.5.0.0

G16680-01

Copyright © 2020, 2024, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1 Create Installer Property File

1.1	Create Property File	1-1
1.2	Custom Installation	1-11
1.3	Setting General Properties	1-11
1.4	Setting Single Sign on	1-15
1.5	Setting SMTPS/DMS details	1-18
1.6	Configuring Scheduler	1-20
1.7	Setting Scheduler EMS Properties	1-23
1.8	Setting EMS FTP/FTPS Properties	1-25
1.8.1	Setting Scheduler GI Upload Queue Properties	1-27
1.9	Setting Reports details	1-27
1.10	Saving Property File	1-28

Index

Preface

This topic contains the following sub-topics:

- [Purpose](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Critical Patches](#)
- [Diversity and Inclusion](#)
- [Related Resources](#)
- [Conventions](#)
- [Screenshot Disclaimer](#)
- [Acronyms and Abbreviations](#)

Purpose

This manual explains the steps to create property file using Installer Application. While creating this property file, the environment property file also gets generated.

Audience

This guide is primarily intended for developers and third party or vendor software's. Some information may be relevant to IT decision makers and users of the application are also included. Readers are assumed to possess basic operating system, network, and system administration skills with awareness of vendor/third-party software's and knowledge of Oracle Banking Treasury Management.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Critical Patches

Oracle advises customers to get all their security vulnerability information from the Oracle Critical Patch Update Advisory, which is available at [Critical Patches](#), [Security Alerts and Bulletins](#). All critical patches should be applied in a timely manner to make sure effective security, as strongly recommended by [Oracle Software Security Assurance](#).

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Related Resources

For more information, see these Oracle Banking Treasury Management resources:

- *Oracle Banking Treasury Management Release Notes*
- *Oracle Banking Treasury Management Installer Index*
- *Oracle Banking Treasury Management Installer Prerequisite*

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Screenshot Disclaimer

Personal information used in the interface or documents is dummy and does not exist in the real world. It is only for reference purposes.

Acronyms and Abbreviations

The acronyms and abbreviations are listed in this below table:

Table Acronyms and Abbreviations

Abbreviations or Acronyms	Definition
DV	Derivatives
DMS	Document Management System
EAR	Enterprise Archive
ETD	Exchange Traded Derivatives

Table (Cont.) Acronyms and Abbreviations

Abbreviations or Acronyms	Definition
FX	Foreign Exchange
FTPS	FTP over SSL
FCUBS	Oracle FLEXCUBE Universal Banking
GUI	Graphical User Interface
HTTP	Hyper Text Transfer Protocol
JDBC	Java Database Connectivity
LDAP	Lightweight Directory Access Protocol
MSAD	Microsoft Active Directory
MM	Money Market
OBTR	Oracle Banking Treasury Management
OT	Over the Counter Options
SE	Securities
SFTP	Secure FTP
SMS	Security Management System
SR	Securities Repo
SSO	Single sign-on

1

Create Installer Property File

This guide explains the steps to create property file for Oracle Banking Treasury Management. While creating this property file, the environment property file also gets generated.

This topic contains following sub-topics:


- [Create Property File](#)
- [Custom Installation](#)
- [Setting General Properties](#)
- [Setting Single Sign on](#)
- [Setting SMTPS/DMS details](#)
- [Configuring Scheduler](#)
- [Setting Scheduler EMS Properties](#)
- [Setting EMS FTP/FTPS Properties](#)
- [Setting Reports details](#)
- [Saving Property File](#)

1.1 Create Property File

To create the property file, follow the steps given below:

1. Launch the installer, that is, **FCUBSInstaller.bat** (for Windows), and **FCUBSInstaller.sh**(for Linux, bash shell recommended). These files are available in INSTALLER/SOFT/GUI.

Figure 1-1 Command Prompt

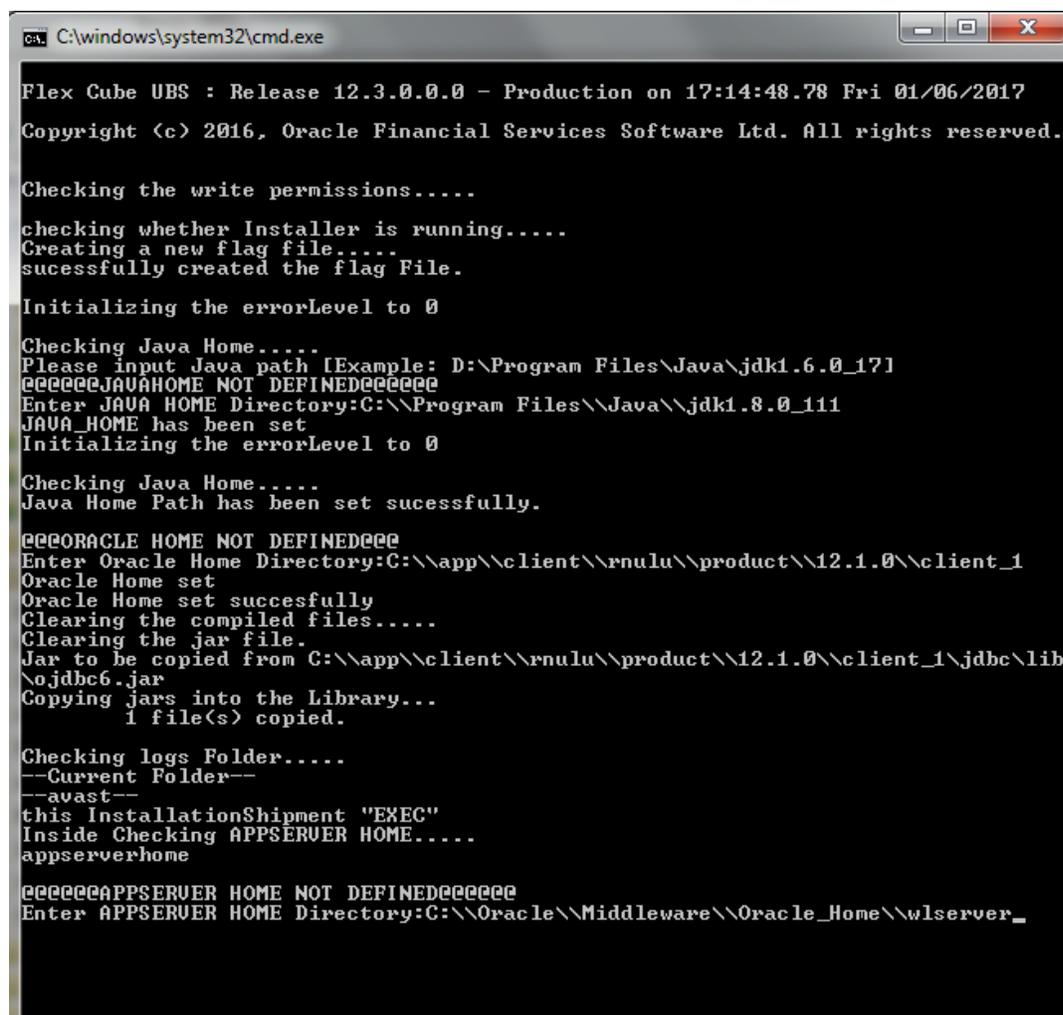

```
C:\windows\system32\cmd.exe
Flex Cube UBS : Release 12.3.0.0.0 - Production on 17:14:48.78 Fri 01/06/2017
Copyright (c) 2016, Oracle Financial Services Software Ltd. All rights reserved.

Checking the write permissions.....
checking whether Installer is running.....
Creating a new flag file.....
sucessfully created the flag File.

Initializing the errorLevel to 0

Checking Java Home.....
Please input Java path [Example: D:\Program Files\Java\jdk1.6.0_17]
@@@@@JAVAHOME NOT DEFINED@@@@@
Enter JAVA HOME Directory:C:\Program Files\Java\jdk1.8.0_111
JAVA_HOME has been set
Initializing the errorLevel to 0

Checking Java Home.....
Java Home Path has been set sucessfully.

@@@@ORACLE HOME NOT DEFINED@@@
Enter Oracle Home Directory:C:\app\client\rnulu\product\12.1.0\client_1
Oracle Home set
Oracle Home set sucesfully
Clearing the compiled files.....
Clearing the jar file.
Jar to be copied from C:\app\client\rnulu\product\12.1.0\client_1\jdbc\lib
\ojdbc6.jar
Copying jars into the Library...
    1 file(s) copied.

Checking logs Folder.....
--Current Folder--
--avast--
this InstallationShipment "EXEC"
Inside Checking APPSERVER HOME.....
appserverhome


@@@@@APPSEVER HOME NOT DEFINED@@@@@
Enter APPSEVER HOME Directory:C:\Oracle\Middleware\Oracle_Home\wlserver_
```

In the first screen, provide the following details:

- a. **JAVA HOME PATH** - Provide the JDK home path with the latest version.
- b. **ORACLE HOME PATH** - Provide the Oracle 12C Client Path.
- c. **APP SERVER HOME PATH** - Provide the app server home path.

After providing these details, INSTALLER-GUI gets started. And follow the below details. Ensure the Pre-requisites are available.

Figure 1-2 Installer GUI

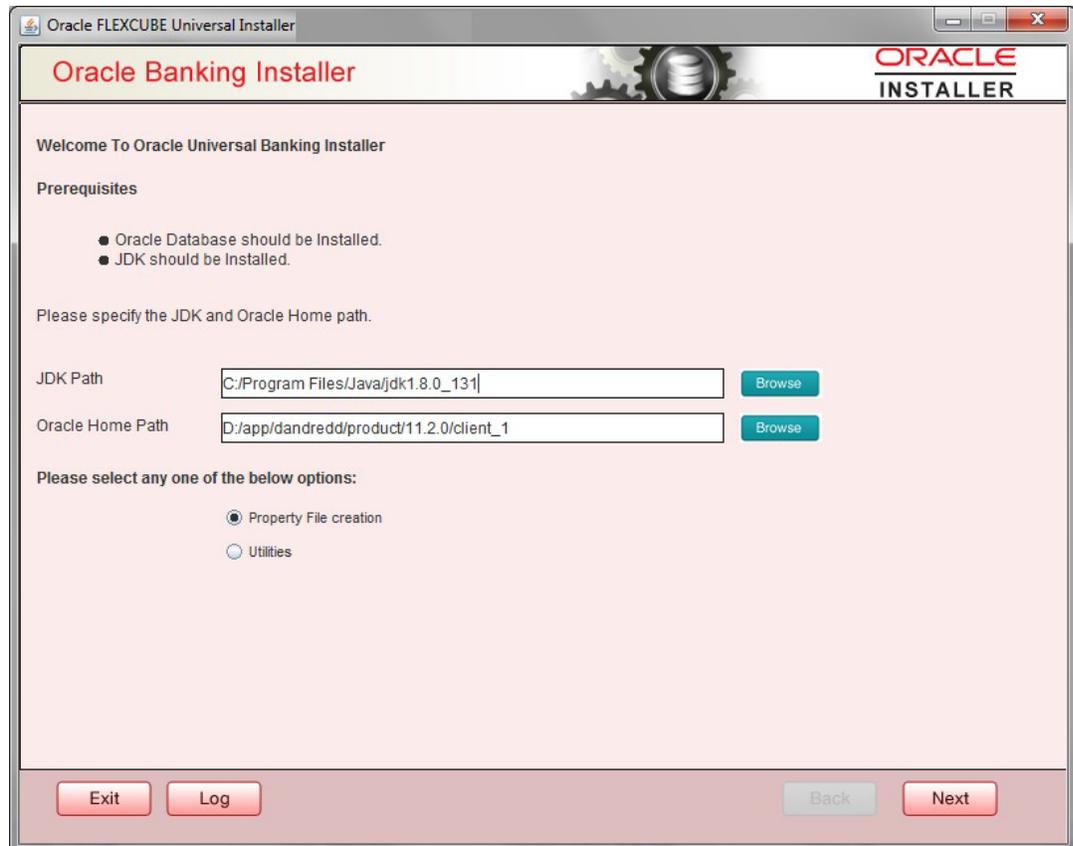

Enter the following details:

- **JDK Path** - Maintain home folder path of JDK. The JAVA HOME path given in previous screen gets defaulted.
- **Oracle Home** - Maintain home folder path of Oracle Database Client. The ORACLE HOME path given in previous screen gets defaulted.


Select one of the radio buttons:

- Property File creation**
- Utilities**

Based on the selection, next screen is shown. Click **Property File creation** for the current case.

2. Click **Next** and the following screen is displayed.

Figure 1-3 Property File Creation

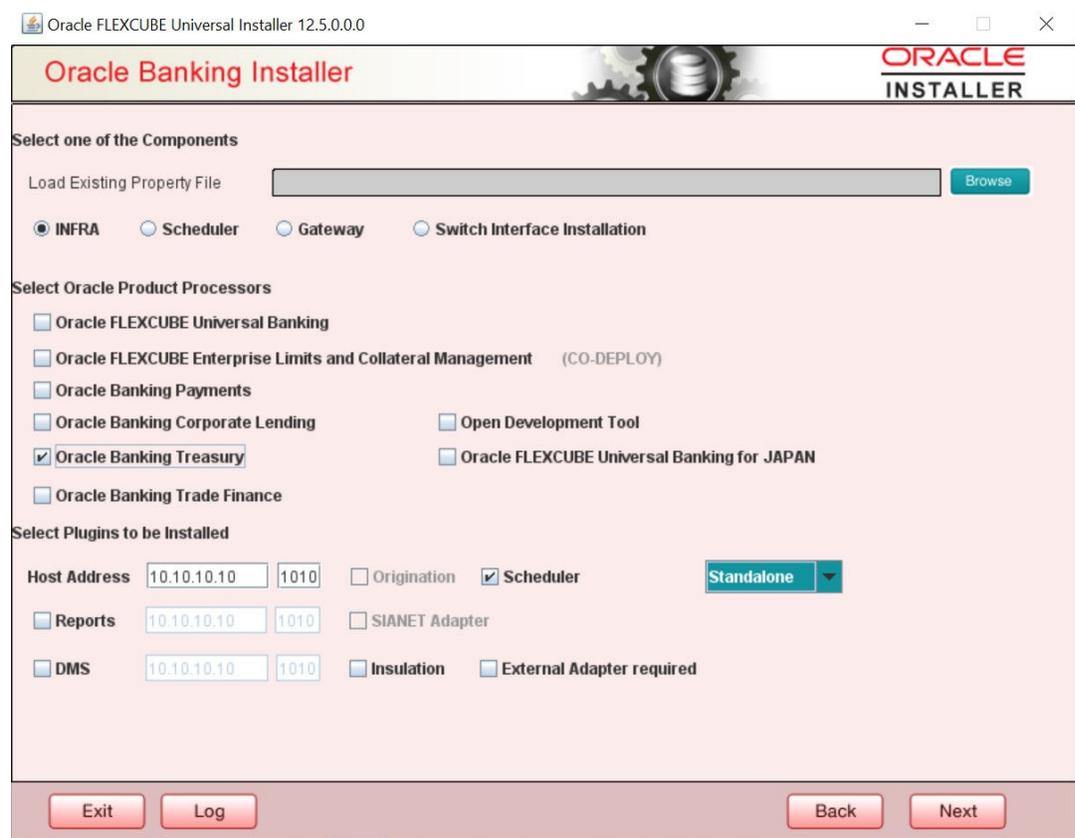

These are the plugins available:

- Scheduler
- Reports
- DMS(Document Management System)
- Insulation

You can load existing property-file to make any modifications.

- a. Select the component for which property file is to be created.
 - i. INFRA is for FCUBS property file creation. To create property file for Scheduler or Gateway or Switch Interface Installation, refer the respective property file creation document.
- b. Select Oracle Banking Treasury for Treasury Management Property file creation. Select Scheduler which is Standalone, where Scheduler will be Standalone with EAR. If Embedded is selected, it will be integrated with the Treasury Management EAR.
- c. In the screen below, select the Plugins to be included in the application.
- d. If you need to modify an existing property file, load it using the respective browse button.

Plugins are enabled and disabled based on the combination of Product Processors and components selected.

These are the plugins available for Oracle Banking Treasury Management

- Scheduler
- Reports

These are the plugins available for Oracle Banking Treasury if co-deployed with Oracle Banking Payments

- Scheduler
- Reports
- BPEL

3. Click **Next** again and the following screen is displayed:

Figure 1-4 SMS Schema Details

SMS Schema Details

Name	Value
Username	OBTR145GA
Password
Service Name	TR147MONMNTOSD
IP Address	100.76.147.158
Port	1521
TNS Connect Descriptor	TR147MONMNTOSD

Entity Schema Details

Same as SMS Schema

Entity Id: JNDI Name:

Name	Value
Username	OBTR145GA
Password
Service Name	TR147MONMNTOSD
IP Address	100.76.147.158
Port	1521
TNS Connect Descriptor	TR147MONMNTOSD

Compile in All Entities

Buttons: Prev, Next, Exit, Log, Back, Next, Test Connection (x2)

Provide the SMS schema details to capture the credentials which is used for DB Compilation.

Note:

IP Address should be same as mentioned in the TNSnames.ora


Once the connection is successful env.properties file present in path `INSTALLER > SOFT > GUI > logs > env.properties` gets updated with schema details in encrypted format.

For Multi-Entity Details:

- a. **Scenario for Single Entity:**
 - Here Entity Schema is mandatory, atleast minimum one entry should be provided.
 - Entity Id value is default, that is, **ENTITY_ID1** for first entry.
 - Provide the JNDI Name for the ENTITY_ID1. By default the jndi name is **jdbc/fcjdevDS**.
 - Give the Schema Details for the Entity1.
 - Here Compile In All Entities Field is **N**. (As using the Single Entity Concept).
 - b. **Scenario for More than One Entity, that is, Multi Entity:**
 - After providing the Single Entity details, click on + Add the rows.
 - Now give the details for Entity_ID2. Here the field is mandatory.
 - Provide the schema details and the JNDI name.
 - Next and Prev button is to traverse for entity screens.
 - Can also add the entites and delete the entities.
4. Click on **Test Connection** button. After successful connection click on **Next** button to proceed and below Screen is displayed. This screen displays database parameters listed in v\$parameter table.

This page is Read-only used as reference to know the database parameters. Schema drop-down list is provided to verify parameters of SMS and Entity Schemas.


Figure 1-5 DB Installation

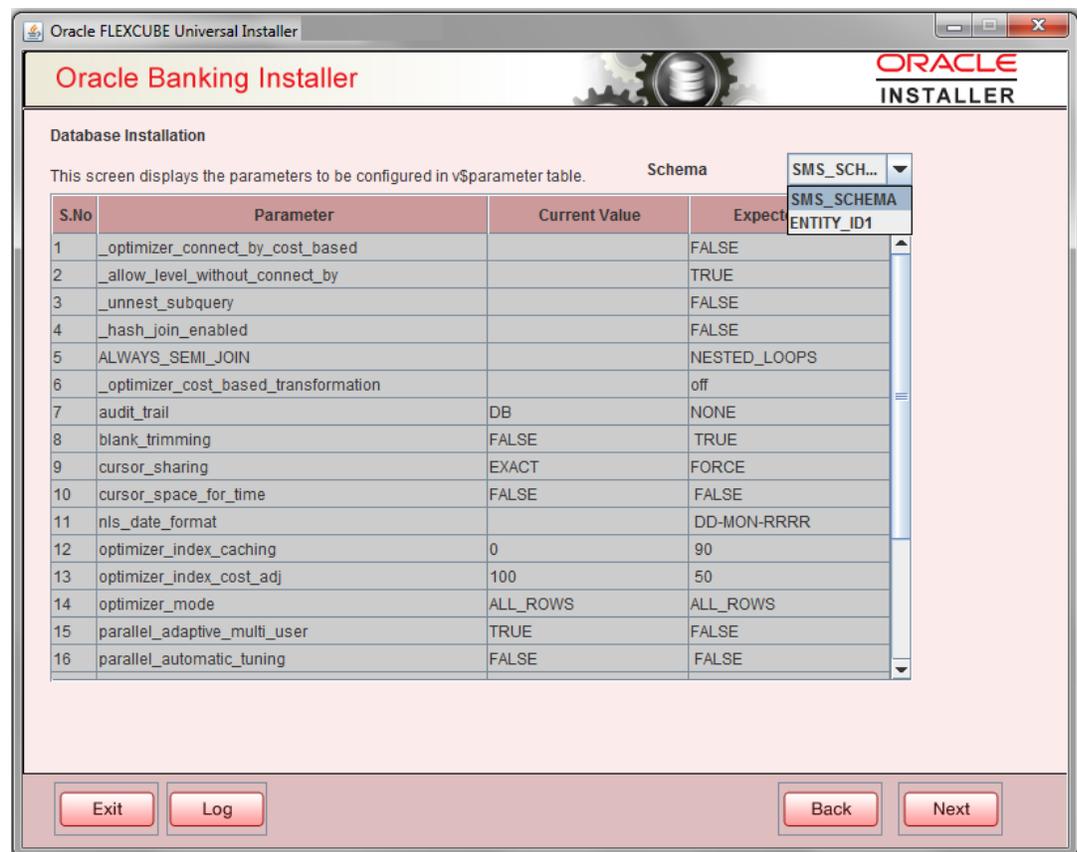

- Click on **Next** Button. Following screen displays the grants provided to the schema. If object compilation is required and the privilege is not given, then you can find that out from this screen.

Schema drop-down lists SMS and Entity Schemas. Select Schema and proceed further.

Figure 1-6 Grants Script Details

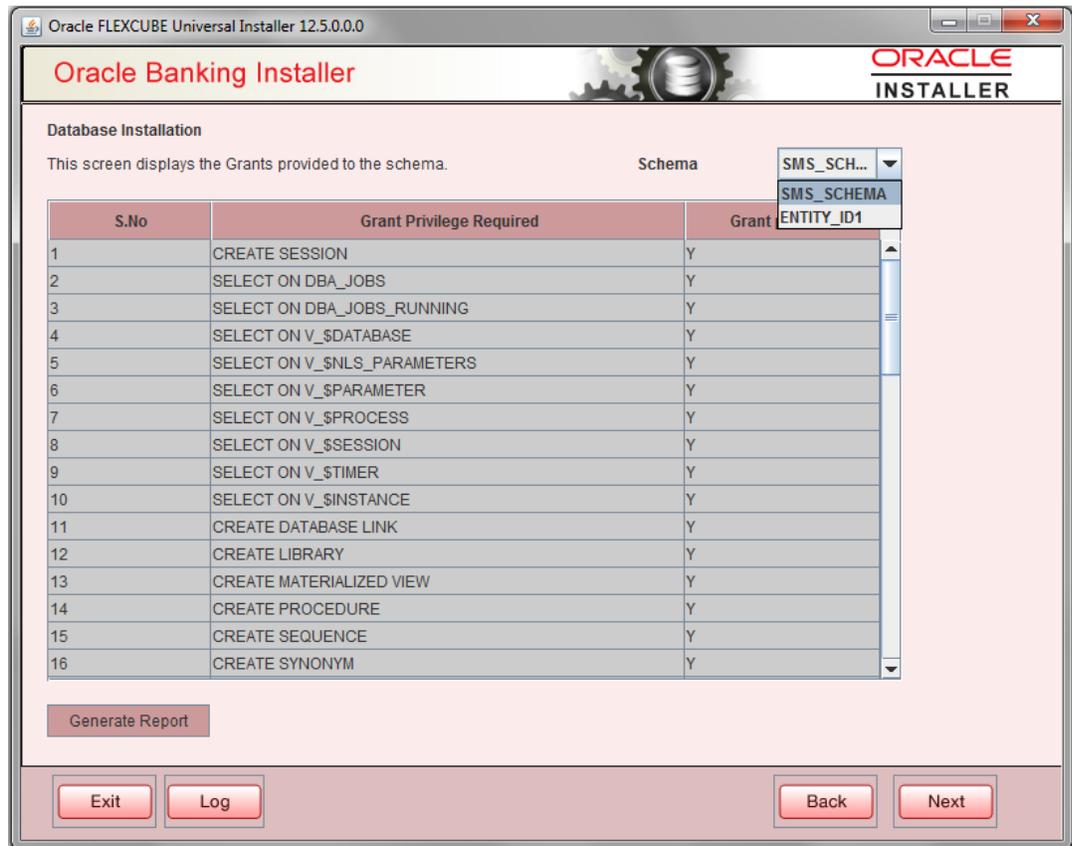

- Click **Generate Report** button, the installer creates an SQL file **grantScript.sql** containing the script for granting the privileges in the **Logs** folder and the following screen is displayed.

You can use this file to get the access.

Note:

Only the sys user can execute the file **grantScript.sql** for granting privileges.

- Click **Next** again and the following screen is displayed:

Figure 1-7 Environment Details

Table 1-1 Environment Details

Field	Description
EAR Name	Specify a name for the application to be deployed. You cannot use special characters such as . (Dot), , (comma), \$ and so on. However, you may use _ (underscore). – Applicable for both Windows and Linux.
Context Name	Based on the Application type selected, the Installer displays the application context. However, you may modify the default value. This information is updated in application.xml . In case of a WebLogic server, this is updated in weblogic.xml .
File Separator Style	Specify the type of file separator (For example: Linux or Windows). Select the appropriate one from the drop-down list. You also need to specify the version of the selected operating system.
Application Server	Specify the application server in which you are creating the property file. Select the appropriate one from the adjoining drop-down list. For WebSphere, External JSUIXML Required option is not supported.
External JSUIXML Required	Specify whether screen changes are deployed as External JSUIXML for the application. EXTERNAL_JSUIXML_REQUIRED=Y/N: Depending on requirement EXTERNAL_JSUIXML_REQUIRED=N: JS and UIXML files are included inside the application EAR. EXTERNAL_JSUIXML_REQUIRED=Y: JS and UIXML and HELP files are kept in an external path in the application server.

Table 1-1 (Cont.) Environment Details

Field	Description
External Property File Required	<p>Specify whether screen changes are be deployed as External fcubs.properties for the application.</p> <p>EXTERNAL_PROPERTY_PATH_REQUIRED =Y/N: Depending on requirement</p> <p>EXTERNAL_PROPERTY_PATH_REQUIRED =N: fcubs.properties file is included inside the application EAR.</p> <p>EXTERNAL_PROPERTY_PATH_REQUIRED =Y: fcubs.properties file is kept in an external path in the application server.</p> <div style="border: 1px solid #0070C0; padding: 5px; margin-top: 10px;"> <p> Note:</p> <p>External property file path should have the property file name also with it. For example: C:\App\fcubs.properties</p> </div>
Application server path	Provide the Application Server Path.
Source Path	Provide the source path of the console exec directory. (Mention exact folder name after unzip the source)
Ear Destination path	Specify the path where Ear needs to be copied after building it using SOFT Installer.
External JSUIXML Path	<p>In case External JSUIXML Required option is checked, External JSUIXML path on the application server machine has to be specified here. External JSUIXML required option is supported only for Weblogic Application Server.</p> <p>EXTERNAL_JSUIXML_PATH</p> <p>Example: /scratch/work_area/DEV/FC124_UBS/JS_UIXML_HELP - this can be any path in the Application server.</p>
External Property File Path	In case External Property File required option is selected, External Property File path on the application server machine has to be specified here. ss

8. Click **Next** to continue and following screen is displayed:

Figure 1-8 Release Details



Release : Specify the release in which you are creating the property file. Default option is **KERNEL**. The options are:

- KERNEL

Specify the Hashing algorithm iteration count. By default it is 1000.

Security Key for Encryption Logic is the key (exact 16 characters) for all encryption logic. By default is **oraclefinancials**.

1.2 Custom Installation

Figure 1-9 Custom Installation

Oracle FLEXCUBE Universal Installer 12.5.0.0.0

Oracle Banking Installer

ORACLE
INSTALLER

Property File Creation - DataSource

Please enter DataSource Names

SMS Data Source

Scheduler Data Source

PM Online JNDI

PM Batch JNDI

Webservices Provider URL

Host Server URL

Standalone Scheduler URL

Exit Log Back Next


1. Enter Data sources required which is requested as per the product, Plug-in and Component combinations chosen in the first screen.
2. SMS Data source is always enabled as it is required for most of the cases.
3. PM related data sources are enabled for PM product processor.
4. Enter the Webservices Provider URL.
5. Host Server is the server where FCUBS application is deployed/to be deployed.
6. Standalone scheduler URL is enabled is Standalone option is selected.
7. Click **Next** to proceed to the next screen.

1.3 Setting General Properties

This topic describes the process of setting common properties of Oracle Banking Treasury Management.

The installer displays the **General Property** screen.

Figure 1-10 General Property

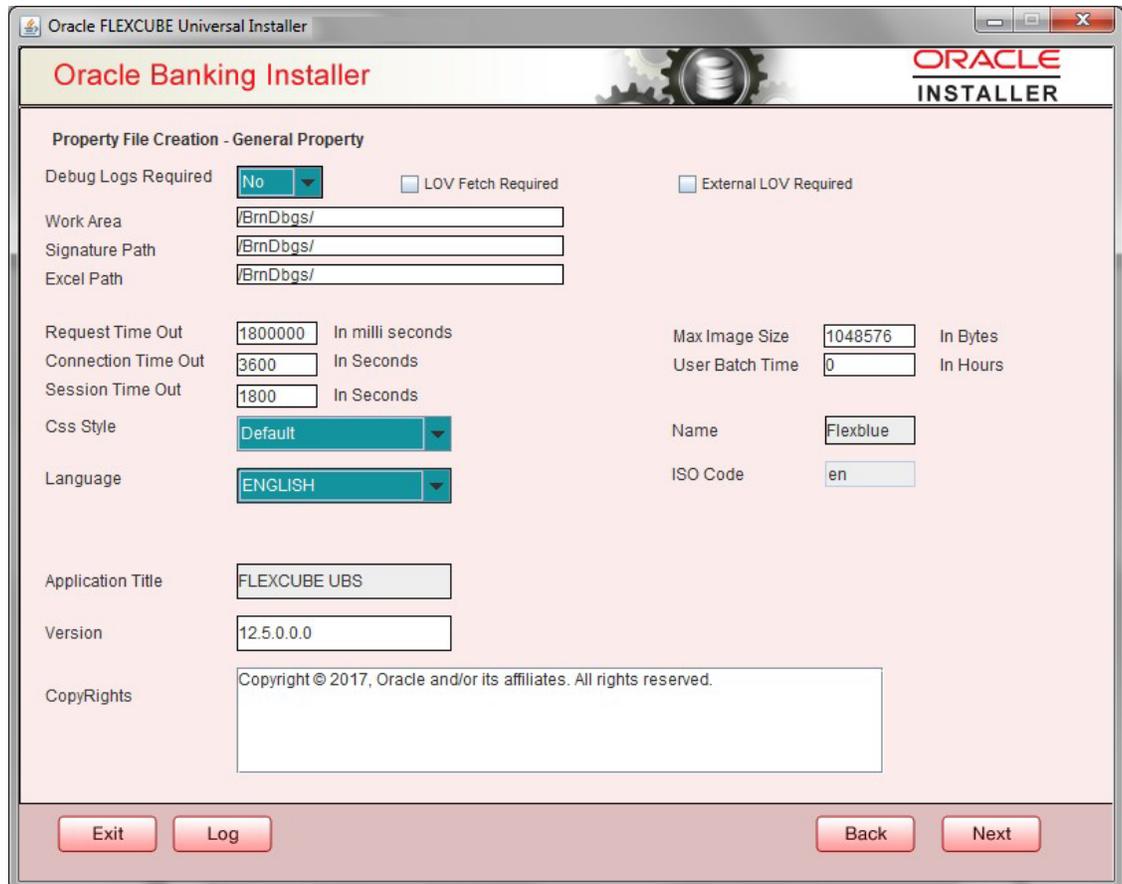

The screenshot shows the 'Oracle Banking Installer' window with the 'Property File Creation - General Property' tab selected. The window title is 'Oracle FLEXCUBE Universal Installer'. The interface includes the Oracle logo and 'INSTALLER' text in the top right. The main area contains various configuration fields:

- Debug Logs Required:** A dropdown menu set to 'No'. There are also checkboxes for 'LOV Fetch Required' and 'External LOV Required', both of which are unchecked.
- Work Area:** A text field containing '/BrnDbgs/'.
- Signature Path:** A text field containing '/BrnDbgs/'.
- Excel Path:** A text field containing '/BrnDbgs/'.
- Request Time Out:** A text field with '1800000' and the unit 'In milli seconds'.
- Connection Time Out:** A text field with '3600' and the unit 'In Seconds'.
- Session Time Out:** A text field with '1800' and the unit 'In Seconds'.
- Max Image Size:** A text field with '1048576' and the unit 'In Bytes'.
- User Batch Time:** A text field with '0' and the unit 'In Hours'.
- Css Style:** A dropdown menu set to 'Default'.
- Language:** A dropdown menu set to 'ENGLISH'.
- Name:** A text field containing 'Flexblue'.
- ISO Code:** A text field containing 'en'.
- Application Title:** A text field containing 'FLEXCUBE UBS'.
- Version:** A text field containing '12.5.0.0.0'.
- CopyRights:** A text area containing 'Copyright © 2017, Oracle and/or its affiliates. All rights reserved.'

At the bottom of the window, there are four buttons: 'Exit', 'Log', 'Back', and 'Next'.

You can specify the following details in this screen:

Table 1-2 General Property

Field	Description
Debug Logs Required	<p>If debug option is required, select Yes from the drop-down list. If not required, select No. By default the value is No.</p> <div style="border-left: 2px solid #0070C0; border-right: 2px solid #0070C0; border-bottom: 2px solid #0070C0; padding: 10px; margin: 10px 0;"> <p> Note:</p> <p>Parameter APPLICATION_WORK_AREA in fcubs.properties is updated to Work Area path provided during installation.</p> </div> <p>Parameter DEBUG is updated based on Debug Logs Required selection. To log debug for the user, following should be available.</p> <ul style="list-style-type: none"> • In Day 0 Setup CSTB_PARAM table is appended with parameter name WORK_AREA and path provided for debug logs. • CSTB_DEBUG table should have entries for required modules. • Corresponding user entries should be input in CSTB_DEBUG_USERS. <p>Example: If SM module log is enabled for the user, then there should be an entry in cstb_debug_users.</p> <p>Table: CSTB_DEBUG_USERS (User Level) CSTB DEBUG USERS</p> <p>Table: CSTB_DEBUG (Bank Level)CSTB DEBUG</p> <p>All the configuration is done using back-end scripts, which can be executed by Data Controller.</p> <p>Snapshot of fcubs.properties is displayed below:FCUBS Properties</p> <p>Change Logs can be visited to view audit information.</p>
LOV Fetch Required	<p>If you select this check box, the option lists displays the matching values based on the first characters that you enter in a field. If you specify the first three characters of a value to be entered in an option list and tab out, the system displays the complete list of values that are matching the first three characters.</p> <p>If you do not select this, option lists does not show the matching values based on the first few characters. You need to specify the complete value against the field.</p>
External LOV Required	<p>If you select this check box, External Lov option for external Limits is enabled.</p>
Work Area	<p>Specify the work area. For example: D:\BrnDbgs\</p>
Signature Path	<p>Specify the location at which the signature images should be placed.</p>
Excel Path	<p>Specify the location at which the excel files should be generated.</p>
Request Time Out	<p>Specify the database request timeout value in milli seconds. This is the maximum number of seconds the database waits for a query to return the result.By default it is 1800000 milli seconds.</p>
Connection Time Out	<p>Specify the database connection timeout value in seconds. This is the maximum number of seconds the application waits for a connection to the database to open.</p>
Session Time Out	<p>Enter the session time out value in seconds. This is the maximum number of seconds during which the application gets active without any user intervention. If there is no user intervention continuously for the duration specified here, the user session gets expire.</p>
Max Image Size	<p>Specifies the maximum image size that can be uploaded. The default size is 1048576 bytes.</p>

Table 1-2 (Cont.) General Property

Field	Description
CSS Style	Specify the CSS style to be used from the adjoining drop down list. You can select one of the following CSS styles: <ul style="list-style-type: none"> Default – select this to apply the default style provided. Custom – select this to apply a custom style
Name	Specify the name of the CSS style. Once you have specified the above details, click Next .
Language	Specify the language in which you wish to see in the application. English is the default language. However, based on the requirement, you can set a different language. Select the appropriate one from the drop-down list. Based on the language selected, the installer displays the ISO code.
Application Title	Specify the application title. C
Version	Specify the application version. For example: 14.0.0.0.0
CopyRights	Specify the copyright details. For example: Copyright © 2017, Oracle and/or its affiliates. All rights reserved.
Integration With ODA ChatBot	Select this check box to enable ODA ChatBot. ODA ChatBot setup details are available in ChatBot guide document.

Table 1-3 CSTB_DEBUG_USERS

Module	Debug	User ID
SM	Y	XYZ

Table 1-4 CSTB_DEBUG

Module	Debug
SM	Y

Figure 1-11 FCUBS Properties

```
##### COMMON PROPERTIES #####
APPLICATION_NAME=FCJ
APPLICATION_EXT=FCROFC
APPLICATION_SERVER=WL
APPLICATION_WORK_AREA=/scratch/work_area/DEV/FC125R2/APPLSGS
DEBUG=Y
SSL_ENABLED=Y
OPSS_AVAILABLE=N
BRANCH_CENTRALIZED=Y
REQUEST_TIME_OUT=1800000
```

1.4 Setting Single Sign on

Figure 1-12 Setting Single Sign on

Property File Creation - Single Sign on

SSO Required SSO Type **DEFAULT** ▼

SSO KEY

Authentication details maintained external to FLEXCUBE

External Password Required Authentication Type **MSAD** ▼

External User Login Required

OPSS Available

Option to provide LDAP server details

No.	Name	Value
1	LDAP SERVER URL	LDAP://10.10.10.10:111
2	LDAP SSL ENABLED	<input type="checkbox"/>
3	SECURITY AUTHENTICATION TYPE	Simple
4	DOMAIN NAME	I-FLEX.COM
5	LDAP SERVER TIMEOUT	0

Option to provide SAML details

No.	Name	Value
1	SAML CERTIFICATE PATH	D:\Security\SAML_Implementation\TestFiles\certstore\b...
2	SAML CERTIFICATE PASSWORD	*****
3	SAML CERTIFICATE ALIAS	barc
4	SAML VALID AUDIENCE	bPAID_BWSIT

Exit Log Back Next

You can specify the following details in this screen:

Table 1-5 Single Sign on

Field	Description
SSO Required	Select this check box to enable single sign-on (SSO). If you select this check box, you need to enter the SSO Key.

Table 1-5 (Cont.) Single Sign on

Field	Description
SSO Type	<p>This is disabled. This is enabled on selecting SSO Required Flag. Specify the SSO Type from the list of following:</p> <ul style="list-style-type: none"> • DEFAULT • TOKEN • SAML • IDCS Token • DEFAULT - This option is the default scenario where the External SSO system needs to send the SSO UserID mapped to the application userID in the SSO_KEY parameter. For Example: 1• If SSO_KEY maintained is DN and SSO_USERID is fcubuser@oracle.com then the SSO system needs to send SSO_USERID in the DN parameter when a request is sent to the application. • The SSO UserID needs to be maintained in the LDAP_USER field of the User Maintenance screen –SSDUSRDF- Refer to section 2.10 <i>Common Core Security Management System User Guide</i> • TOKEN - This option needs to be selected if Custom implementation is required for SSO authentication in the application's Select this option to invoke AuthenticateCustomToken.class when the application login is performed. The required custom implementation method for SSO/SAML needs to be done in the custom class. Exec File Path: INFRA\FCJNeoWeb\war\WEBINF\classes\com\ofss\infra\ss o\AuthenticateCustomToken.class can be referred for the method details. Note: Configuration details on the External SSO system will not be provided/available as part of Application documentation. This needs to be checked with the respective SSO provider. • SAML - By default, 'DEFAULT' option is selected; however, you can change it. IF SAML is selected, SAML details table below will be enabled .Please enter SAML details such as Certificate Path, password, alias and valid audience. This option needs to be selected if SSO -SAML authentication is required. In this case, the external system needs to send the SAML request XML in the SSO_KEY parameter. The application will validate the SAML signature using the certificate Path & password. In addition, the SAML Audience value provided should be the same in the SAML request sent to the application. Note: After the successful SAML validations, the application will allow you to log in with the userID sent in the SAML request. The SAML UserID send in the SAML request needs to be maintained in the LDAP_USER field of the User Maintenance screen – SSDUSRDF- Refer to section 2.10 of <i>Common Core Security Management System User Guide</i>. • IDCS Token - This option needs to be selected if Oracle Identity Cloud Service(IDCS) is used as the Identify & Access management system in cloud deployments.

Table 1-5 (Cont.) Single Sign on

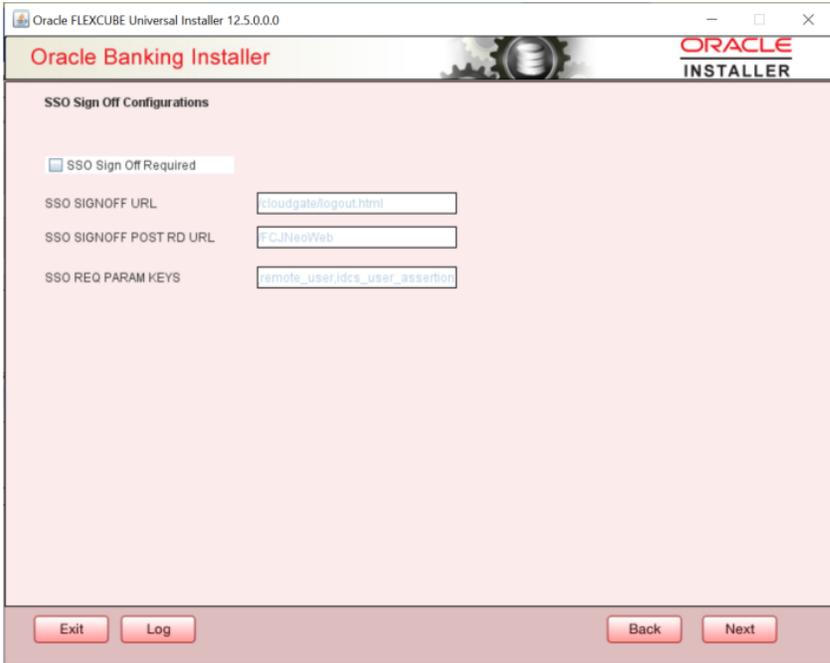
Field	Description
<p>SSO Signoff Configurations</p>	<p>The below section details the options available to do SSO signoff when the user has logged off from the application Select the SSO signoff check box to enable the below fields</p> <ol style="list-style-type: none"> SSO_SIGNOFF_URL: The External SSO logout URL which needs to be invoked after application logoff needs to be configured here. Example: <code>https://oam/server/logout</code> SSO_SIGNOFF_POST_RD_URL : This is applicable only if IDCS is used as IAM system. The URL/Context path which needs to be navigated post SSO signoff needs to be configured here. Example: <code>/FCJNeoWeb</code> SSO_REQ_PARAM_KEYS: This is applicable only if IDCS is used as an IAM system. The keys required for the IDCS token validation need to be specified here as comma-separated. Example: <code>"idcs_service_url,idcs_remote_user,idcs_user_assertion"</code> <p>Figure 1-13 SSO signoff</p>  <p>Note: Note that the Application will only invoke the configured SSO logout URL when the user is logging off the application. The application will not perform any other action for SSO logout.</p>

Table 1-5 (Cont.) Single Sign on

Field	Description
SSO KEY	Specify the SSO key. If you have selected the check box SSO Required , it is mandatory to specify the SSO key. By default the value is DN . If you select the SSO required check box, the Installer skips the following two screens and directly navigate to the SSL screen shown below in this manual. If you are not selected the SSO required check box, then on clicking the Next button, the screen for enabling SSL options is displayed.
External Password Required	Select this check box to allow the user-login using MSAD/LDAP password irrespective of the user ID. If you check this box, the user ID can be either the MSAD/LDAP/ user ID or the FCUBS user ID. And the password can be MSAD/ LDAP/ server password only. If LDAP is selected, table related to LDAP is enabled. Enter LDAP server URL, SSL enabled, Security authentication type, Domain Name, and LDAP Server timeout details. By default, this check box is deselected. However, you can change this.
External User Login Required	Select this check box to enable user login using MSAD/LDAP/ user ID. If you select this box, the user can login using MSAD/LDAP/ server user ID as well as using FCUBS user ID. If you do not select this check box, the user can login using FCUBS user ID only. By default, this check box is deselected. However, you can change this. <div style="border-left: 2px solid #0070C0; padding-left: 10px; margin-left: 10px;"> <p> Note:</p> <p>Authentication Type is enabled if one of the above check boxes is checked.</p> </div>
Authentication Type	Select the authentication type from the adjoining drop-down list. This is the type of external server that is used for authentication. This option is enabled only when External Password Required check box is selected. You can select one of the following options: <ul style="list-style-type: none"> • MSAD (Microsoft Active Directory) • LDAP (Lightweight Directory Access Protocol) By default, MSAD is selected. However, you can change it. Specify the following details.
Platform Security	If the Platform Security box is checked for weblogic, the symmetric key is not stored in the property file for security reasons. If the Platform Security box is unchecked, the symmetric key is available in the property file and a warning message is displayed to the user.
SMS Security Key	This field is used to capture the security key value if the Platform Security check box is checked.
SSL Enabled	SSL Enabled is selected by default. Click Next and the next screen gets displayed.

Click **Next** and the next screen gets displayed.

1.5 Setting SMTPS/DMS details

This section describes the method to configure email details and SMTPS/DMS properties whichever is required.

Figure 1-14 Setting SMTPS/DMS details



For SMPTS protocol, specify the following details.

Table 1-6 Options for Mail configuration

Field	Description
Host	Specify the SMTP host name.
User ID	Specify the user ID.
User Password	Specify the user password.
JNDI Name	Specify the JNDI name. In the next table specify the branch properties like Date Seperator, WorkFlow frequency, Compress Request as required.

DMS/IPM Properties table is enabled only if DMS plug-in is enabled. Specify the following details:

Table 1-7 DMS/IPM Properties

Field	Description
Login Service Address	This is the endpoint address of the web service (OracleIPM.WebService.EndpointAddress).

Table 1-7 (Cont.) DMS/IPM Properties

Field	Description
Document Service Address	This is the URL to which the Oracle IPM adapter uploads the documents (OracleIPM11G.DocumentService.EndpointAddress).
Document Content Service Address	This is the URL to which the Oracle IPM adapter uploads the documents (OracleIPM11G.Document ConetntService.EndpointAddress). Example for Login Service Address: Weblogic: http://10.10.10.10:1010/imaging/ws/LoginService In the ablove URL replace LoginService with DocumentService and DocumentContentService respectively for Document Service Address and Document Content Service Address as well.
IPM User Name	This is the user name accessing Oracle IPM (OracleIPM11G.Authentication.UserName).
IPM Password	This is the password for the above IPM user name (OracleIPM11G.Authentication.Password).
IPM Application Name	This indicates the license that provides login rights to Oracle IPM (OracleIPM11G.Application).
HTTP Session Maintain	This check box indicates whether HTTP session to be maintained or not (OracleIPM11G.MaintainSession).


Once you have specified the above details, click **Next** and system displays the next screen.

1.6 Configuring Scheduler

If **Scheduler Standalone** is chosen during plug-in selection time, all the below screens mentioned under scheduler configuration is **not applicable**.

This topic describes the method to configure scheduler data source. System displays the following screen:

Figure 1-15 Scheduler Queues

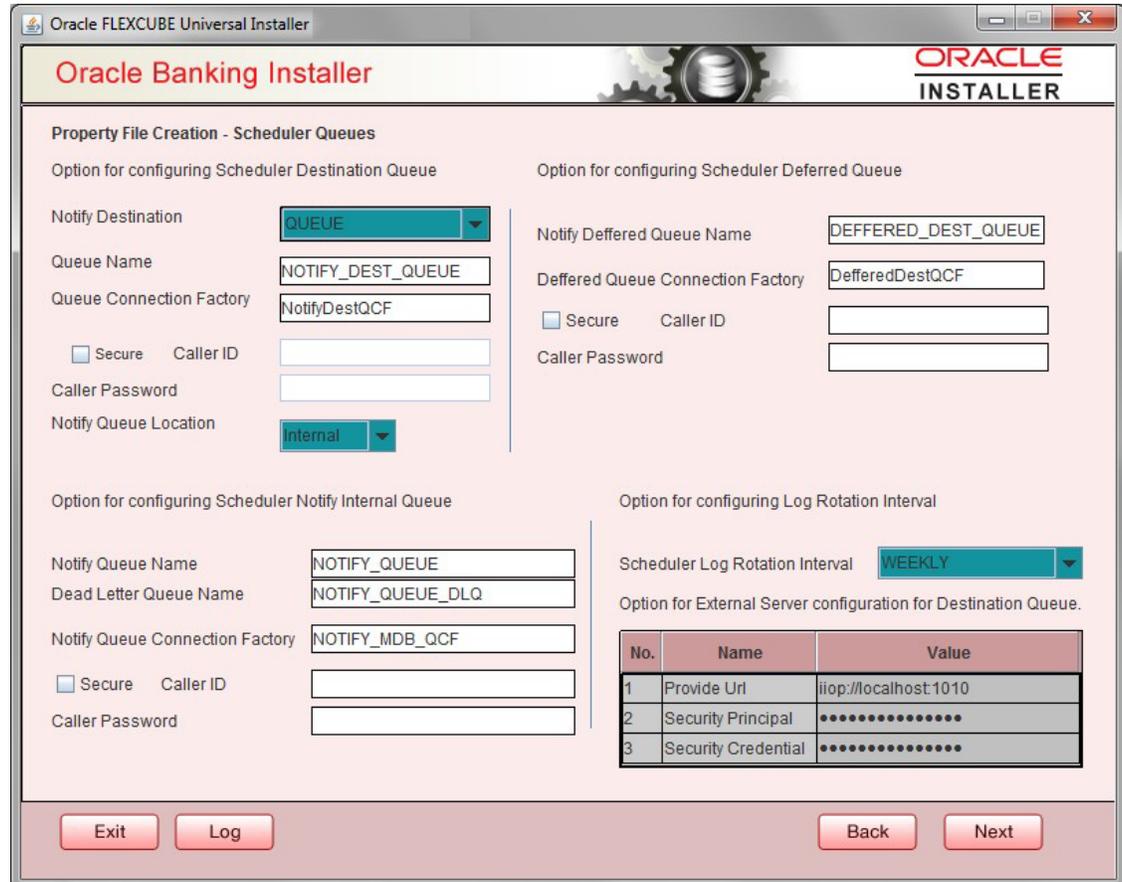

Specify the following details:

Table 1-8 Scheduler Queues

Field	Description
Scheduler Log Rotation Interval	Select the interval between each rotation of scheduler log. Given options are – DAILY, WEEKLY and MONTHLY.
Notify Destination	Specify the notify destination. Select one of the following options: <ul style="list-style-type: none"> • QUEUE • TOPIC
Queue Name	Set NOTIFY_DEST_QUEUE as the destination queue name.
Queue Connection Factory	Set NotifyDestTCF as the queue connection factory.
Secure	Select this check box to indicate that it is a secured queue connection factory. If you select this check box, you are prompted to specify the Caller ID and Caller Password as shown in the following screen. Specify the following details: <ul style="list-style-type: none"> • Notify Deferred Queue Name - Set DEFERRED_DEST_QUEUE as the notify differed queue name. • Deffered Queue Connection Factory - Set DefferedDestQcf as the deferred queue connection factory.

Table 1-8 (Cont.) Scheduler Queues

Field	Description
Secure	Select this check box to indicate that it is a secured deferred queue connection factory. If you select this check box, you are prompted to enter the caller ID and caller password. Specify the following details: <ul style="list-style-type: none"> • Notify Queue Name - Set NOTIFY_QUEUE as the notify queue name.. • Dead Letter Queue Name - Set NOTIFY_QUEUE_DLQ as the dead letter queue name. • Notify Queue Connection Factory - Set NOTIFY_MDB_QCF as the notify queue connection factory.
Secure	Select this check box to indicate that it is a secured queue connection factory. If you select this check box, you are prompted to enter the caller ID and caller password as shown in the following screen
Notify Queue Location	Specify the notify queue location. Select one of the following options: <ul style="list-style-type: none"> • Internal • External <div style="border: 1px solid #0070C0; padding: 5px; margin: 10px 0;"> <p> Note: For Oracle WebLogic Application Server, the notify queue location should be selected as Internal.</p> </div> <p>If you choose External following details for the external queue are enabled.</p> <ul style="list-style-type: none"> • Provider URL • Security Principal • Security Credentials
Provider URL	Specify the provide URL (iiop://localhost:1010). 1010 is the default IIOp port.
Security Principal	Specify the login ID to access the application. server.
Security Credentials	Specify the password to access the application server. Click Next to proceed with scheduler configuration.
	<div style="border: 1px solid #0070C0; padding: 5px; margin: 10px 0;"> <p> Note: If you choose Internal as the Notify Queue Location, this screen is not displayed.</p> </div>

Table 1-9 URL

Application Server	EMS Out Initial Context Factory
Oracle WebLogic	t3://<ip_adress>:port For example: t3://10.10.10.10:1010 Here, 10.10.10.10 represents the local host and 1010 to the target server default port (AdminServer/ManagedServer).

Click **Next** and the following screen is displayed.

1.7 Setting Scheduler EMS Properties

Figure 1-16 Scheduler EMS Properties

No.	Name	Value
1	Incoming Dead Letter Queue Name	EMS_QUEUE_DLQ
2	Incoming backup Queue Name	EMS_QUEUE_BACK
3	Incoming Queue Connection Factory	EmsQcf
4	Secure Incoming Queue Connection	<input type="checkbox"/>
5	Incoming Queue Caller Id	
6	Incoming Queue Caller Password	
7	Outgoing Dead Letter Queue Name	EMS_QUEUE_DLQ
8	Outgoing Queue Connection Factory	EmsQcf
9	Secure Outgoing Queue Connection	<input type="checkbox"/>
10	Outgoing Queue Caller Id	
11	Outgoing Queue Caller Password	
12	Outgoing Queue Provider URL	t3://10.10.10:1010
13	Queue Principal	*****
14	Queue Credential	*****
15	Incoming Queue Name	EMS_INQUEUE
16	Outgoing Queue Name	EMS_OUTQUEUE
17	SFMS Incoming Queue	SFMS_INQUEUE
18	RTGS Incoming Queue	RTGS_INQUEUE
19	EMS Bulker Queue	BULKER_QUEUE

Specify the following details:

Table 1-10 Scheduler EMS Properties

Field	Description
Incoming Dead Letter Queue Name	By default EMS_QUEUE_DLQ is set as the incoming dead letter queue name, retain the same.
Incoming backup Queue Name	By default EMS_QUEUE_BACK is set as incoming backup queue name, retain the same.
Incoming Queue Connection Factory	Specify the name of the incoming connection factory to which EMS listens. You need to create this connection factory in the application server. For details on connection factory creation, follow the steps described for creation of notify connection factories. EmsQcf is given as default value for the incoming queue connection factory.

Table 1-10 (Cont.) Scheduler EMS Properties

Field	Description
Secure Incoming Queue Connection	Select this check box to indicate that it is a secured queue connection.
Incoming Queue Caller ID	Specify the caller ID for the secured queue connection.
Incoming Queue Caller Password	Specify the caller password for the secured queue connection.
Outgoing Dead Letter Queue Name	By default EMS_QUEUE_DLQ is set as outgoing dead letter queue name, retain the same.
Outgoing Queue Connection Factory	Specify the name of the outgoing connection factory to which EMS listens. You need to create this connection factory in the application server. For details on connection factory creation, follow the steps described for creation of notify connection factories. EmsQcf is given as default value for the outgoing queue connection factory.
Secure Outgoing Queue Connection	Select this check box to indicate that it is a secured outgoing queue connection.
Outgoing Queue Caller ID	Specify the caller ID for the secured queue connection.
Outgoing Queue Caller Password	Specify the caller Password for the secured queue connection.
Outgoing Queue Provider URL	Specify the URL of the outgoing queue. In case EMS OUT MDB is to be configured to queue, you need to specify the URL for outgoing provider based on the application server. By default, the Installer displays the outgoing queue provider URL for Oracle WebLogic. This value is application server dependent. The details of Outgoing Queue Provider URL to be used for different application servers.
Queue Principal	Specify the queue principal. If EMS OUT MDB has to be configured to queue, you need to specify the EMS out queue principal. This is the user name for the application server in which the queue is configured.
Queue Credential	Specify the queue credential. If EMS OUT MDB has to be configured to queue, you need to specify the EMS out queue credential. This is the password for the above user name created for application server in which the queue configured.
Incoming Queue Name	Specify the incoming queue name for which EMS is configured. By default EMS_INQUEUE is specified.
Outgoing Queue Name	Specify the outgoing queue name for which EMS is configured. By default EMS_OUTQUEUE is specified.
SFMS Incoming Queue	Specify the SFMS Incoming Queue for which EMS is configured. By default SFMS_INQUEUE is specified.
RTGS Incoming Queue	Specify the RTGS incoming Queue for which EMS is configured. By default RTGS_INQUEUE is specified.
EMS Bulker Queue	Specify the Bulker Queue name. By default BULKER_QUEUE is specified, retain the same. So that in fcubs.properties file, EMS_BULKER_QUEUE field gets updated to BULKER_QUEUE value.

Table 1-11 Outgoing Queue Provider URL

Application Server	EMS Out Initial Context Factory
Oracle WebLogic	t3://<ip_adress>:port For example: t3://10.10.10.10:1010 Here, 10.10.10.10 represents the local host and 1010 to the target server default port (AdminServer/ManagedServer).

Once you have specified the above details, click **Next** and system displays the next screen.

1.8 Setting EMS FTP/FTPS Properties

Specify the following details:

Figure 1-17 EMS FTP/FTPS Properties

Oracle Banking Installer **ORACLE**
INSTALLER

Property file Creation - EMS FTP/FTPS
Option for Scheduler EMS FTP/FTPS configuration

No.	Name	Value
1	File TransferMode	SFTP
2	Server	10.10.10.10
3	User id	OFSS
4	Password
5	KnownHost file local folder path	/mnt/ems/SFTP/
6	KnownHost file server folder path	/mnt/ems/SFTP/
7	File Type	.txt
8	SWIFT Format	1
9	SWIFT Message Delimiter	<input checked="" type="checkbox"/>
10	SWIFT Message Terminator	<input checked="" type="checkbox"/>
11	MEDIA	SWIFT

Option for EMS -Structured Financial Messaging System configuration

No.	Name	Value
1	Signature Block	<input checked="" type="checkbox"/>
2	Keystore File Name	/keystore
3	Keystore Alias name
4	Keystore Password

Exit Log Back Next

Table 1-12 EMS FTP/FTPS Properties

Field	Description
File Transfer Mode FTPS	Specify the mode of transferring files to EMS. Enter one of the following: <ul style="list-style-type: none"> • FTPS (FTP over SSL) • SFTP(Secure FTP) • HTTP(Hyper Text Transfer Protocol) <div style="border: 1px solid #0070C0; padding: 5px; margin-top: 10px;">  Note: FTP is File Transfer Protocol </div>
Server	Specify the server IP address for the selected file transfer mode.
User ID	Specify the user ID to access the server of the file transfer mode.
Password	Specify the password to for the above user ID.
Known Hosts Local Folder path	Specify the local path for known hosts file generation. This is required only when File transfer mode is SFTP.
Known Hosts server folder path	Specify the server path for known hosts file pick-up. This is required only when File transfer mode is SFTP. Copy the generated known hosts file to the given server path.
File Type	Specify the type of file that is transferred. By default, the Installer sets it as .txt .
SWIFT FORMAT	Specify the SWIFT format.
SWIFT Message Delimiter	Specify the character which is used as the message delimiter.
SWIFT Message Terminator	Specify the character which is used as the message terminator.

Once you have specified the above details, Specify the EMS- Structured Financial Messaging System configuration details:

Table 1-13 EMS- Structured Financial Messaging System

Field	Description
Signature Block	Select this check box to enable signature block.
Keystore File Name	Specify the keystore file name.
Keystore Alias Name	Specify the keystore alias name.
Keystore Password	Specify the keystore password.


Once you have specified the above details, click **Next** and system displays the next screen.

This topic has the following sub-topic:

- [Setting Scheduler GI Upload Queue Properties](#)

1.8.1 Setting Scheduler GI Upload Queue Properties

Figure 1-18 Setting Scheduler GI Upload Queue Properties

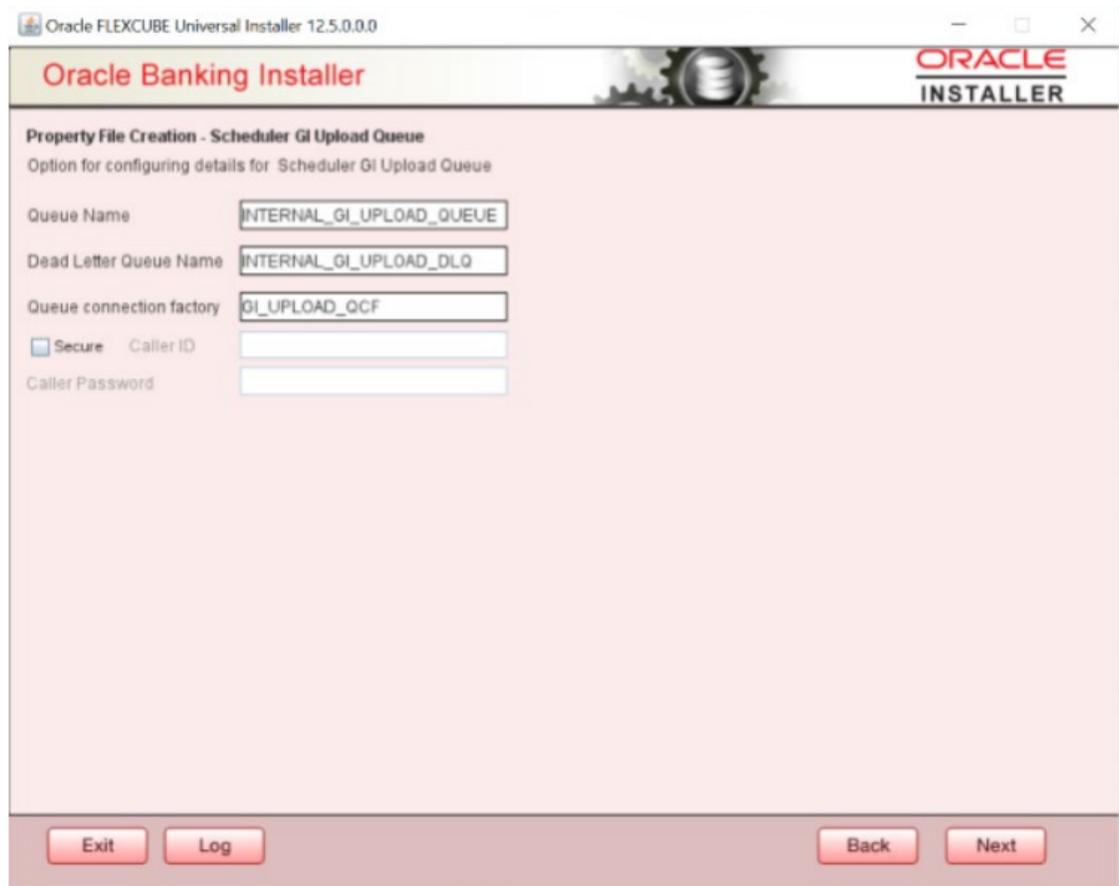

The screenshot shows the Oracle Banking Installer window titled "Oracle FLEXCUBE Universal Installer 12.5.0.0.0". The main content area is titled "Oracle Banking Installer" and "ORACLE INSTALLER". The configuration screen is titled "Property File Creation - Scheduler GI Upload Queue" and includes the following fields and options:

- Queue Name: INTERNAL_GI_UPLOAD_QUEUE
- Dead Letter Queue Name: INTERNAL_GI_UPLOAD_DLQ
- Queue connection factory: GI_UPLOAD_QCF
- Secure
- Caller ID: [Empty field]
- Caller Password: [Empty field]


At the bottom of the window, there are four buttons: "Exit", "Log", "Back", and "Next".

Once you have specified the above details, click **Next** and system displays the next screen.

1.9 Setting Reports details

For Report properties, this table is enabled only if REPORTS_ENABLED plug-in is selected.

Figure 1-19 Setting Reports Details

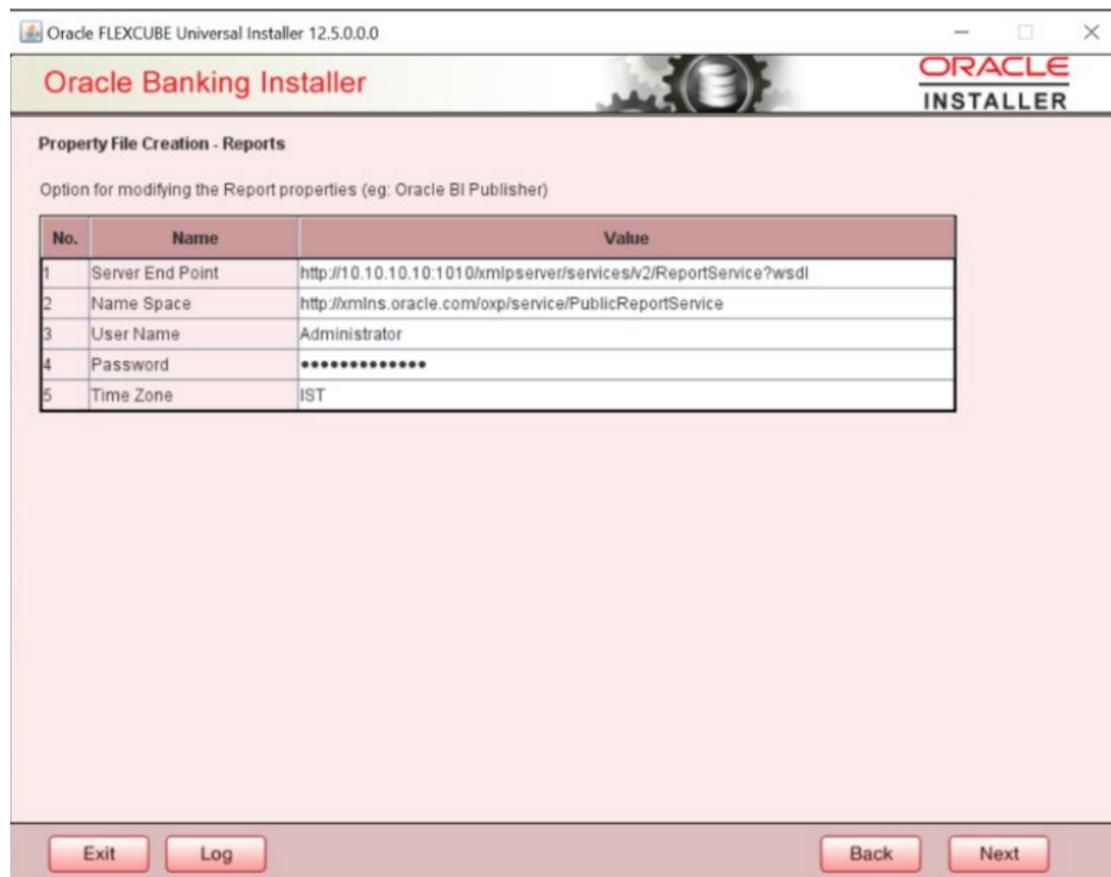

Specify the following details:


Table 1-14 Reports details

Field	Description
Server End Point	Specify the end point. However, you need to change the IP and port where Application is installed. WSDL URL gets modified based on "Server Version".
Name Space	Specify the name space. By default, the installer displays <i>http://xmlns.oracle.com/oxp/service/PublicReportService</i> .
User Name	Specify the user name. By default, the Installer displays Administrator .
Password	Specify the password for the above user name. By default, the Installer sets it as Administrator .
Time Zone	Specify the time zone of the Reports server.

1.10 Saving Property File


After completing all the required settings explained above, you need to save the property file.

Figure 1-20 Saving Property File

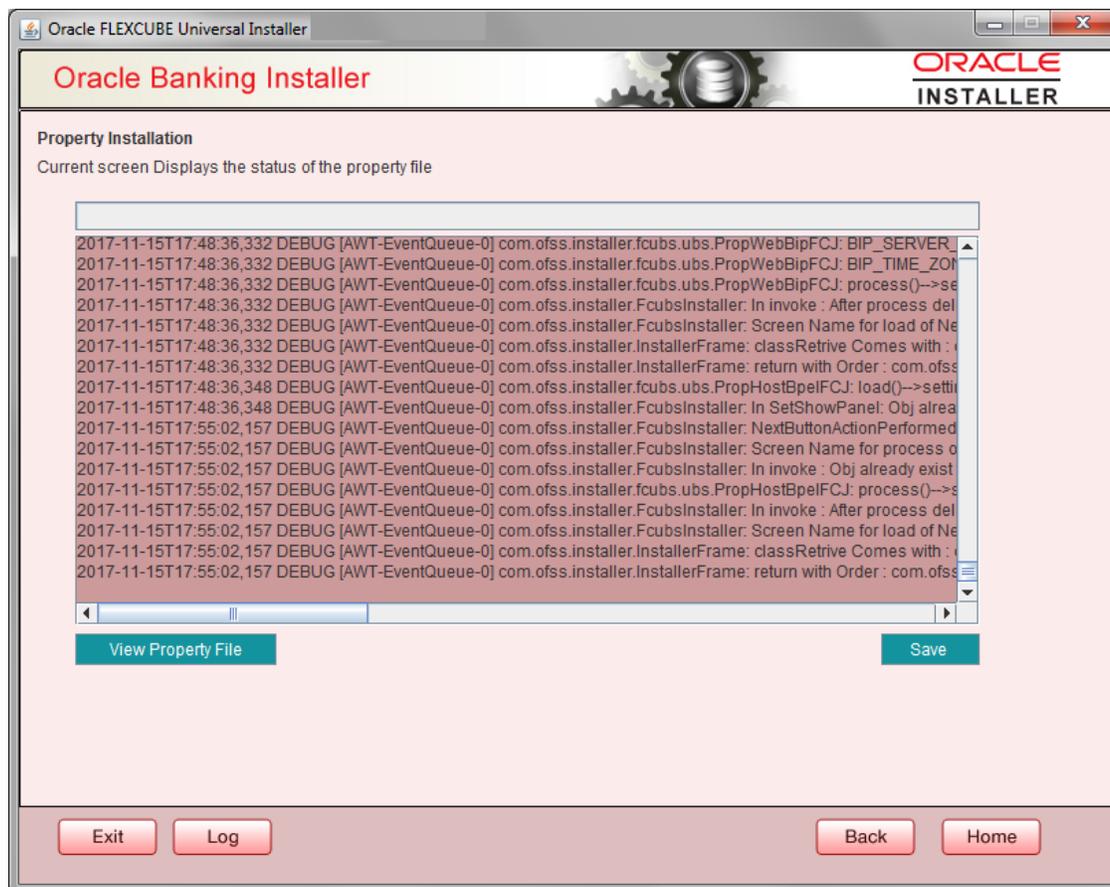

You can view the status of property file creation in the above screen. Once the file is saved, the installer displays the following message:

Figure 1-21 Message Details

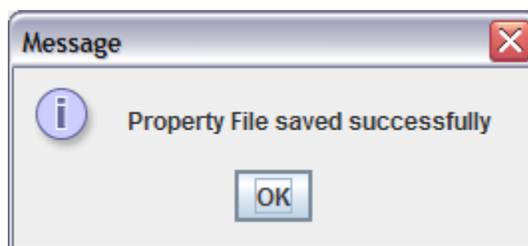

This completes the properties file creation. Along with the property file creation, env.properties file is also generated in \INSTALLER\SOFT\GUI\logs path and is automatically copied to \INSTALLER\SOFT\logs folder.

 **Note:**

Env.properties file parameters gets updated during every property file creation (like FCUBS, Gateway, Scheduler, and son on). After Property file creation, proceed with respective EAR build and then proceed with other components property file creations and build.

Also OracleIPMAdapter.properties is generated in same path as fcubs.properties when IPM plug-in is enabled.

Index

C

Configuring Scheduler, [1-20](#)
Creating Property File, [1-1](#)
Custom Installation, [1-11](#)

S

Saving Property File, [1-28](#)

Setting General Properties, [1-11](#)
Setting Reports details, [1-27](#)
Setting Scheduler EMS Properties, [1-23](#)
Setting Scheduler GI Upload Queue Properties,
[1-27](#)
Setting Single Sign on, [1-15](#)
Setting SMTPS/DMS details, [1-18](#)