

Oracle® Banking Virtual Account Management

Oracle Banking Routing Hub Integration Guide



Release 14.7.3.0.0

F92443-01

February 2024

ORACLE®

Copyright © 2018, 2024, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Contents

Preface

Purpose	v
Audience	v
Documentation Accessibility	v
Diversity and Inclusion	vi
Related Resources	vi
Conventions	vi
Screenshot Disclaimer	vi
Acronyms and Abbreviations	vi

1 Integration Guide

1.1	Introduction	1-1
1.2	APIs configured using Oracle Banking Routing Hub	1-1
1.2.1	DDA Implementation	1-2
1.2.1.1	Service Providers - DDA	1-2
1.2.1.2	Environment Variable Configuration	1-3
1.2.1.3	Consumer Services - DDA	1-6
1.2.2	EXTERNAL ACCOUNT Implementation	1-10
1.2.2.1	Service Providers - EXTERNAL ACCOUNT	1-12
1.2.2.2	Consumer Services - EXTERNAL ACCOUNT	1-13
1.2.3	Oracle Banking Payments Implementation	1-15
1.2.3.1	Service Providers - Oracle Banking Payments	1-16
1.2.3.2	Consumer Services - Oracle Banking Payments	1-17
1.2.4	Interest and Charges Implementation	1-25
1.2.4.1	Service Providers - Interest and Charges	1-26
1.2.4.2	Consumer Services - Interest and Charges	1-27
1.2.5	Oracle Banking Liquidity Management Implementation	1-37
1.2.5.1	Service Providers - Oracle Banking Liquidity Management	1-38
1.2.5.2	Consumer Services - Oracle Banking Liquidity Management	1-39
1.2.6	Oracle Banking Host to Host Implementation	1-42
1.2.6.1	Service Providers - Oracle Banking Electronic Data Exchange	1-44

Index

Preface

- [Purpose](#)
- [Audience](#)
- [Documentation Accessibility](#)
- [Diversity and Inclusion](#)
- [Related Resources](#)
- [Conventions](#)
- [Screenshot Disclaimer](#)
- [Acronyms and Abbreviations](#)

Purpose

This guide provides information about the APIs configured in Oracle Banking Virtual Account Management through Oracle Banking Routing Hub. These APIs are configured to use the jars directly for the endpoint for different APIs like amount block, transaction journaling etc.

Audience

This guide is primarily intended for the following user/user roles:

Table 1 Audience

Role	Function
Implementation and IT Staff	Implementation and maintenance of the software

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Related Resources

The related documents are as follows:

- *Oracle Banking Common Core User Guide*
- *Oracle Banking Getting Started User Guide*
- *Routing Hub Configuration User Guide*

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Screenshot Disclaimer

Personal information used in the interface or documents are dummy and does not exist in the real world. It is only for reference purposes.

Acronyms and Abbreviations

The list of acronyms and abbreviations that are used in this guide are as follows:

Table 2 Acronyms and Abbreviations

Abbreviation	Description
API	Application Programming Interface
ECA	External Credit Approval
REST	Representational State Transfer

Table 2 (Cont.) Acronyms and Abbreviations

Abbreviation	Description
URL	Uniform Resource Locator

1

Integration Guide

This topic provides information about the APIs configured in Oracle Banking Virtual Account Management through Oracle Banking Routing Hub.


- [Introduction](#)
This topic provides the overview about Oracle Banking Routing Hub.
- [APIs configured using Oracle Banking Routing Hub](#)
This topic describes about the various APIs configured using Oracle Banking Routing Hub.

1.1 Introduction

This topic provides the overview about Oracle Banking Routing Hub.

Oracle Banking Routing Hub enables seamless & standardised integrations between FSGBU Banking Products using configurations provided as part of the product Infrastructure.

Figure 1-1 Oracle Banking Routing Hub Integration

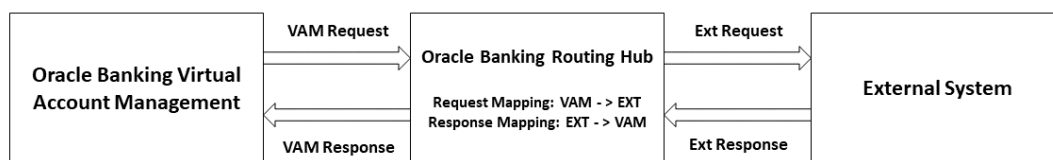

For more details on configuration, refer to ***Routing Hub Configuration User Guide***.

1.2 APIs configured using Oracle Banking Routing Hub

This topic describes about the various APIs configured using Oracle Banking Routing Hub.

- [DDA Implementation](#)
This topic provides the API information for DDA Implementation.
- [EXTERNAL ACCOUNT Implementation](#)
This topic provides the API information for EXTERNAL ACCOUNT Implementation.
- [Oracle Banking Payments Implementation](#)
This topic provides the API information for Oracle Banking Payments Implementation.
- [Interest and Charges Implementation](#)
This topic provides the API information for Interest and Charges Implementation.

- [Oracle Banking Liquidity Management Implementation](#)
This topic provides the API information for Oracle Banking Liquidity Management Implementation.
- [Oracle Banking Host to Host Implementation](#)
This topic provides the API information for Oracle Banking Host to Host Implementation.

1.2.1 DDA Implementation

This topic provides the API information for DDA Implementation.

The following APIs are configured using Oracle Banking Routing Hub.

Table 1-1 DDA Implementation - Parameters

API	Host	Version
closeECA	FCUBS OBA	14.1 / 14.4 14.7
EAC	FCUBS OBA	14.1 / 14.4 14.7
createECA	FCUBS OBA	14.1 / 14.4 14.7
handofftoDDA	FCUBS OBA	14.1 / 14.4 14.7

The following Service Providers and Consumer Services needs to be configured in Oracle Banking Routing Hub:


- [Service Providers - DDA](#)
This topic describes about the service providers configuration for DDA systems.
- [Environment Variable Configuration](#)
This topic describes the systematic instruction to configure the environment variables for DDA systems.
- [Consumer Services - DDA](#)
This topic describes about the consumer services required for DDA Implementation.

1.2.1.1 Service Providers - DDA

This topic describes about the service providers configuration for DDA systems.

Multiple DDA providers are added to configure FCUBS 14.1 and FCUBS 14.4. They use SOAP APIs for request/response. Oracle Banking Virtual Account Management also supports the integration to Oracle Banking Accounts 14.7. They use REST APIs for request/response.

Figure 1-2 Service Providers - DDA

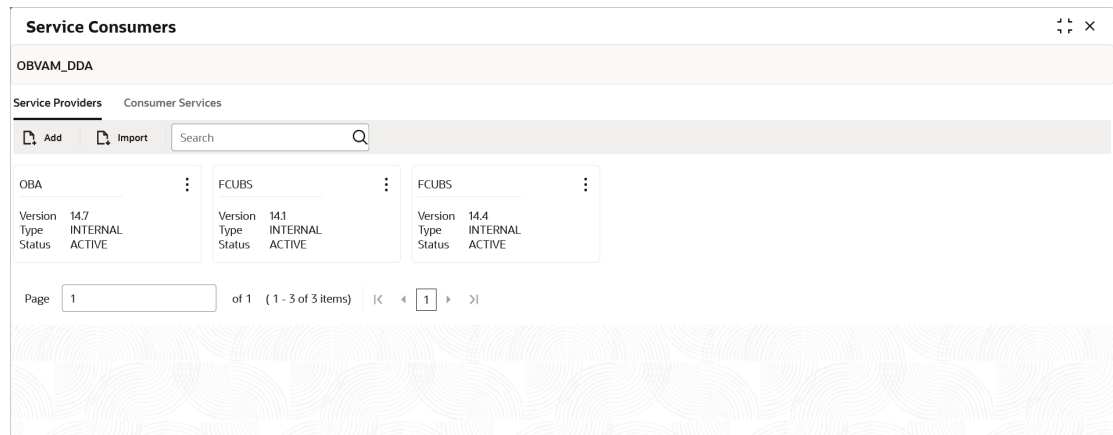

1.2.1.2 Environment Variable Configuration

This topic describes the systematic instruction to configure the environment variables for DDA systems.

Environment variables are used to set values for the headers. Set environment specific values for variables like User ID, Branch code, Entity ID.

1. On **Service Consumer** screen, click **Action** icon on the right corner of the **OBAM_DDA** tile.
2. Click **Edit** button from the list.

The **Edit Service Consumer** screen displays.

Figure 1-3 Edit Service Consumer

Edit Service Consumer

Name: OBVAM_DDA

Audit Type: Service level configurator

Environment Variables

Add

Group

Required

Actions	Name	Value
No data to display.		

Save

- Under **Environment Variables** section, click **Add** button.
 - Click **Group** from the dropdown list.
- The **Add Environment Group** screen displays.

Figure 1-4 Add Environment Group

Add Environment Group

Name: OBA_GROUP

Enter 0 to 255 characters.
No numeric value allowed at beginning.No space allowed.

OK

- On the **Add Environment Group** screen, create the environment group for Oracle Banking Accounts.
 - Click **OK** to add the environment group.
 - Under **Environment Variables** section, click **Add** button.
 - Click **Variable** from the dropdown list.
- The **Add Environment Variable** screen displays.

Figure 1-5 Add Environment Variable

The screenshot shows a dialog box titled "Add Environment Variable". It contains two text input fields. The first field, labeled "Name", contains the text "userID". The second field, labeled "Value", contains the text "ADMINUSER1". An "OK" button is positioned at the bottom right of the dialog.

9. On the **Add Environment Variable** screen, specify the following parameters.

Table 1-2 Environment Variables - Parameters

Name	Value
userId	Header user ID
branchCode	header branch code
ContentType	application/json
handoff_Block_appId	CDDAPPTBSAPP
EAC_appid	CDDAPPACCNTAPP
entityID	header entity ID

10. Click **OK** button to add the environment variables.

The **Edit Service Consumer - Review** screen displays.

Figure 1-6 Edit Service Consumer - Review

Edit Service Consumer

Name:

Audit Type:

Environment Variables

Group:

Actions	Name	Value
	userId	ADMINUSER1

Save

11. Once all the required environment variables are configured, click **Save** button to save the service consumer.

1.2.1.3 Consumer Services - DDA

This topic describes about the consumer services required for DDA Implementation.

The below endpoints must be configured under Consumer Services in Oracle Banking Routing Hub:

1. Create an amount block (createECA)
2. Close/release amount block (closeECA)
3. External account check (EAC)
4. Create a transaction (handofftoDDA)

Figure 1-7 Consumer Services - DDA

Service Consumers		
OBVAM_DDA		
Service Providers Consumer Services		
Add Import Search		
Actions	Name	Description
⋮	closeECA	Close External Credit Approval
⋮	createECA	Create External Credit Approval
⋮	EAC	External Account Check
⋮	handoffToDda	hand off the transaction to dda
Page 1 of 1 (1 - 4 of 4 items) < 1 >		

createECA

This API enables the user to create an amount block.

SERVICE-CONSUMER = "OBVAM_DDA"

SERVICE-CONSUMER-SERVICE="createECA"

Request:

```
{
  "currentUserID": "",
  "currentBranchCode": "",
  "ddaSystem": "",
  "transactionrefNo": "",
  "creatEextRefNo": "",
  "ecaReferenceNo": "",
  "source": "",
  "effectiveDate": "",
  "ecaBlockDetailsDTO":
  [
    {
      "accountNo": "",
      "accCurrency": "",
      "accountbranch": "",
      "blockStatus": "",
      "drCrIndicator": "",
      "sweepRequired": "",
      "partialBlkReqd": "",
      "remarks": "",
      "requestBlkAmount": "",
      "approvedBlkAmount": "",
      "outstandingBlkAmount": "",
      "partialReleaseAllowed": ""
    }
  ]
}
```

```
]
}
```

Response:

```
{
  "MSGSTAT":"" (SUCCESS/FAILURE)
  "RABLOCKDETAILS":
  [
    {
      "RealAccountNumber":"{Real Account Number}",
      "BLOCKREFERENCENO":"{Block Reference Number}"
    }
  ]
  "DDAREFERENCENO": "{DDA reference number}"
  "{ERROR_CODE}":"{ERROR_DESC}" (if MSGSTAT = FAILURE)
}
```

closeECA

This API enables the user to close/release the amount block.

SERVICE-CONSUMER = "OBVAM_DDA"

SERVICE-CONSUMER-SERVICE = "closeECA"

Request:

```
{
  "currentUserID": "",
  "currentBranchCode": "",
  "ddaSystem": "",
  "ecaReferenceNo": "",
  "ddaReferenceNo": "",
  "createextRefNo": "",
  "source": "",
  "ecaCloseDetailsDTO":
  [
    {
      "accountNo": "",
      "accCurreny": "",
      "accountbranch": "",
      "blockStatus": ""
    }
  ]
}
```

Response:

```
{
  "MSGSTAT":""
}
```

EAC

This API enables the user to perform an external account check.

SERVICE-CONSUMER = "OBVAM_DDA"

SERVICE-CONSUMER-SERVICE = "ECA"

Request:

```
{
  "currentUserID": "",
  "currentBranchCode": "",
  "ddaSystem": "",
  "realAccountNo": "",
  "transactionDate": "",
  "drCrIndicator": "",
  "externalRefNo": "",
  "mcyFlag": "",
  "customerBranchCode": "",
  "ccy": "",
}
```

Response:

```
{
  "isValidAccount":""
}
```

handoffToDda

This API enables the user to create a transaction.

SERVICE-CONSUMER = "OBVAM_DDA"

SERVICE-CONSUMER-SERVICE = "handoffToDda"

Request:

```
{
  "currentUserID": "",
  "currentBranchCode": "",
  "action": "",
  "sourceReferenceNo": "",
  "ddaSystem": "",
  "externalReferenceNo": "",
  "source": "",
  "ecaEntriesDetailsDTO":
  [
    {
      "module": "",
      "transactionRefNo": "",
      "eventserialNo": "",
      "event": "",
      "accBranch": "",
    }
  ]
}
```

```

        "accountNumber": "",
        "accCCY": "",
        "drCrIndicator": "",
        "amttag": "",
        "lcyAmt": 0,
        "trnDate": "",
        "valueDate": "",
        "ecaRefernceNo": "",
        "blockReleaseStatus": "",
        "chequeMandatory": "",
        "availBalReqd": "",
        "intraDayRelease": "",
        "availInfo": "",
        "salaryCredit": "",
        "sweepRequried": "",
        "escrow": "",
        "AMLMontoring": "",
        "considerForAccActivity": "",
        "balUpdThruPC": "",
        "txnNarrative": "",
        "txnCode": "",
        "relatedCustomer": "",
        "fcyAmount": 0,
        "exchrte": 0,
        "accountEntryType": "",
        "forceDebit": "",
        "ecaBlockReferenceNumber" : "",
        "accountingRefNo" : ""
    }
]
}

```

Response:

```

{
  "MSGSTAT": "",
  "ACCOUNTINGDETAILS":
  [
    {
      "AccountNumber": "",
      "accountingRefNo": "",
      "eventserialNo": ""
    }
  ]
}

```

1.2.2 EXTERNAL ACCOUNT Implementation

This topic provides the API information for EXTERNAL ACCOUNT Implementation.

This API is used when the account number needs to be generated externally. Oracle Banking Virtual Account Management's account number generation will be suppressed and externally generated account number will be assigned.

The following API is configured using Oracle Banking Routing Hub:

1. ext_acc

- Host - Ext_Acc_Provider
- Version - 14.4
- API - /api-gateway/cmc-obrh-services/route/dispatch
- Headers –
 - SERVICE-CONSUMER - OBVAM_EXTERNAL_ACCOUNT
 - SERVICE-CONSUMER-SERVICE - ext_acc
 - REQUIRED_ACTION - VA / IBAN / VA_IBAN



Note:

VA / IBAN / VA_IBAN – Choose of the option based on Branch Parameter configuration.

Environment variables are used to set values for the headers. Set environment specific values for variables like User ID, Branch code.

Figure 1-8 Edit Service Consumer - EXTERNAL ACCOUNT

Edit Service Consumer

Name:

Audit Type:

Environment Variables

Group:

Actions	Name	Value
⋮	appld	VAM
⋮	branchCode	000
⋮	userId	DEB01

Save

Refer the [Environment Variable Configuration](#) topic to set the values in **Edit Service Consumer** screen.

The following Service Providers and Consumer Services needs to be configured in Oracle Banking Routing Hub:

- [Service Providers - EXTERNAL ACCOUNT](#)
This topic describes about the service providers configuration for EXTERNAL ACCOUNT.
- [Consumer Services - EXTERNAL ACCOUNT](#)
This topic describes about the consumer services required for EXTERNAL ACCOUNT Implementation.

1.2.2.1 Service Providers - EXTERNAL ACCOUNT

This topic describes about the service providers configuration for EXTERNAL ACCOUNT.

To configure the external system in Oracle Banking Routing Hub, import WSDL / Swagger provided by the external system.

Figure 1-9 Service Providers - EXTERNAL ACCOUNT

Figure 1-10 Service Providers - Edit Service Provider

1.2.2.2 Consumer Services - EXTERNAL ACCOUNT

This topic describes about the consumer services required for EXTERNAL ACCOUNT Implementation.

The below endpoint must be configured under Consumer Services in Oracle Banking Routing Hub:

1. Generate the account number externally (ext_acc)

Figure 1-11 Consumer Services - EXTERNAL ACCOUNT

Service Consumers		
OBVAM_EXTERNAL_ACCOUNT		
Service Providers Consumer Services		
Add Import Search		
Actions	Name	Description
⋮	ext_acc	ext acc gen
Page 1 of 1 (1 - 1 of 1 items) < 1 >		

ext_acc

This API enables the user to generate the account number externally.

Request:

```
{
  "branchCode": "",
  "virtualEntityId": "",
  "virtualEntityName": "",
  "realCustomerNo": "",
  "defaultAccCcy": "",
  "virtualAccProduct": "",
  "virtualAccountNo": "",
  "ibanRequired": "",
  "ibanAccNo": "",
  "realAccountNo": "",
  "virtualAccountName": "",
  "addressLine1": "",
  "addressLine2": "",
  "addressLine3": "",
  "addressLine4": "",
  "pincode": "",
  "countryCode": "",
  "accountPurpose": "",
  "interestCalcReq": "",
  "accountFrozen": "",
  "balChkForDebits": "",
  "balAvailabilityOptions": "",
  "fixedAmtFromPool": "",
  "overdraftAllowed": "",
  "fixedAmount": "",
  "creditTxnsAllowed": "",
  "debitTxnsAllowed": "",
  "status": "",
  "realAccLinkage": "",
  "realAccountCcy": "",
  "realAccountBrn": "",
  "accOpenDate": "",
  "accClosureDate": "",
  "lastActivityDate": "",
}
```

```
"odStartDate": "",  
"odEndDate": "",  
"additionalFields": "",  
"StructuredAddressDTO": [],  
"sanctionChkStatus": ""  
}
```

Response:

```
{  
  "virtualAccountNo": "",  
  "ibanAccNo": ""  
}
```

1.2.3 Oracle Banking Payments Implementation

This topic provides the API information for Oracle Banking Payments Implementation.

The following APIs is configured for Oracle Banking Payments Implementation using Oracle Banking Routing Hub:

1. **PendingPaymentQuery**
2. **StrcAddressServiceCreate**
3. **StrcAddressServiceModify**
4. **StrcAddressServiceClose**
5. **StrcAddressServiceReopen**
6. **CreateExtVirtualAcc**
7. **ModifyExtVirtualAcc**
8. **CloseExtVirtualAcc**
9. **ReopenExtVirtualAcc**

SERVICE-CONSUMER - OBVAM_OBPM

- API - /api-gateway/cmc-obrh-services/route/dispatch
- Host - OBPM
- Version - 14.4

Environment variables are used to set values for the headers. Set environment specific values for variables like User ID, Branch code.

Figure 1-12 Edit Service Consumer - Oracle Banking Payments

Edit Service Consumer

Name:

Audit Type:

Environment Variables

Group:

Actions	Name	Value
⋮	moduleId	PM
⋮	userId	SYSTEM
⋮	userBranch	000

Save

Refer the [Environment Variable Configuration](#) topic to set the values in **Edit Service Consumer** screen.

The following Service Providers and Consumer Services needs to be configured in Oracle Banking Routing Hub:


- [Service Providers - Oracle Banking Payments](#)
This topic describes about the service providers configuration for Oracle Banking Payments.
- [Consumer Services - Oracle Banking Payments](#)
This topic describes about the consumer services required for Oracle Banking Payments Implementation.

1.2.3.1 Service Providers - Oracle Banking Payments

This topic describes about the service providers configuration for Oracle Banking Payments.

To configure Oracle Banking Payments in Oracle Banking Routing Hub, import WSDL / Swagger provided by Oracle Banking Payments.

Figure 1-13 Service Providers - Oracle Banking Payments

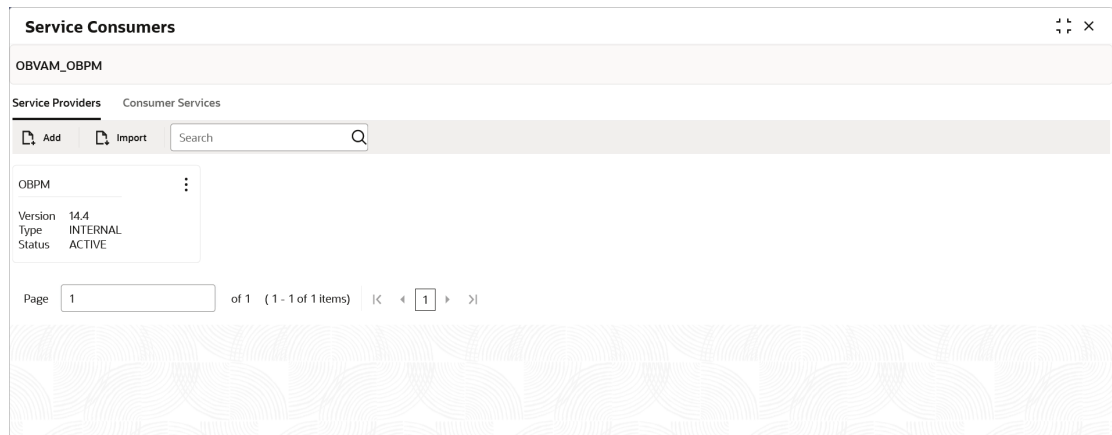

1.2.3.2 Consumer Services - Oracle Banking Payments

This topic describes about the consumer services required for Oracle Banking Payments Implementation.

The below endpoints must be configured under Consumer Services in Oracle Banking Routing Hub:

1. Query for pending payment (PendingPaymentQuery)
2. Structure Address Create (StrcAddressServiceCreate)
3. Structure Address Modify (StrcAddressServiceModify)
4. Structure Address Close (StrcAddressServiceClose)
5. Structure Address Reopen (StrcAddressServiceReopen)
6. Create External VA (CreateExtVirtualAcc)
7. Modify External VA (ModifyExtVirtualAcc)
8. Close External VA (CloseExtVirtualAcc)
9. Reopen External VA (ReopenExtVirtualAcc)

Figure 1-14 Consumer Services - Oracle Banking Payments

Service Consumers		
OBVAM_OBPM		
Service Providers Consumer Services		
Add Import Search		
Actions	Name	Description
⋮	StrcAddressServiceCreate	StrcAddressServiceCreate
⋮	StrcAddressServiceReopen	StrcAddressServiceReopen
⋮	CreateExtVirtualAcc	Create external Virtual Account
⋮	PendingPaymentQuery	Query for pending payment
⋮	ReopenExtVirtualAcc	ReopenExtVirtualAcc
⋮	ModifyExtVirtualAcc	ModifyExtVirtualAcc
⋮	StrcAddressServiceClose	StrcAddressServiceClose
⋮	StrcAddressServiceModify	StrcAddressServiceModify
⋮	CloseExtVirtualAcc	CloseExtVirtualAcc
Page 1 of 1 (1 - 9 of 9 items) < 1 >		

PendingPaymentQuery

This API enables the user to query Oracle Banking Payments system for pending payments during account closure.

SERVICE-CONSUMER = "OBVAM_OBPM"

SERVICE-CONSUMER-SERVICE= "PendingPaymentQuery"

Request:

```
{
  "txnDet":
  {
    "customerAccount": ""
  },
  "header":
  {
    "functionId": "PMDPENDP",
    "action": "EXECUTEQUERY",
    "channel": "REST",
    "source": "MANL",
    "moduleId": "PM",
    "userId": "USER02", ** this user needs to be update as per OBPM
user
    "userBranch": "HEL", ** this branch needs to be updated as per
OBPM user's branch
    "transactionId": ""
  }
}
```

Response:

```
{
  "status": "",
  "errorDTOList":
  [
    {
      "errorCode": "",
      "errorMessage": "",
      "additionalInfo": ""
    }
  ]
}
```

StrcAddressServiceCreate

This API enables the user to create structure address.

Request / Response for OBPM Version 14.4

SERVICE-CONSUMER = "OBVAM_OBPM"

SERVICE-CONSUMER-SERVICE= "StrcAddressServiceCreate"

Request

```
{
  "department": "",
  "subDepartment": "",
  "streetName": "",
  "buildingNumber": "",
  "buildingName": "",
  "floor": "",
  "postbox": "",
  "room": "",
  "postcode": "",
  "townName": "",
  "townLocationName": "",
  "districtName": "",
  "countrySubDivision": "",
  "strrCountry": "",
  "virtualAccountNo": "",
  "branchId": ""
}
```

Response:

```
{
  "MSGSTAT": ""
}
```

StrcAddressServiceModify

This API enables the user to modify structure address.

Request / Response for OBPM Version 14.4

SERVICE-CONSUMER = "OBVAM_OBPM"

SERVICE-CONSUMER-SERVICE= "StrcAddressServiceModify"

Request:

```
{
  "department": "",
  "subDepartment": "",
  "streetName": "",
  "buildingNumber": "",
  "buildingName": "",
  "floor": "",
  "postbox": "",
  "room": "",
  "postcode": "",
  "townName": "",
  "townLocationName": "",
  "districtName": "",
  "countrySubDivision": "",
  "strrCountry": "",
  "virtualAccountNo": "",
  "branchId": ""
}
```

Response:

```
{
  "MSGSTAT": ""
}
```

StrcAddressServiceClose

This API enables the user to close structure address.

Request / Response for OBPM Version 14.4

SERVICE-CONSUMER = "OBVAM_OBPM"

SERVICE-CONSUMER-SERVICE= "StrcAddressServiceClose"

Request:

```
{
  "department": "",
  "subDepartment": "",
  "streetName": "",
  "buildingNumber": "",
  "buildingName": "",
  "floor": "",
  "postbox": "",
  "room": "",
  "postcode": "",
  "townName": "",

```

```

        "townLocationName": "",
        "districtName": "",
        "countrySubDivision": "",
        "strrCountry": "",
        "virtualAccountNo": "",
        "branchId": ""
    }

```

Response:

```

{
  "MSGSTAT": ""
}

```

StrcAddressServiceReopen

This API enables the user to reopen structure address.

Request / Response for OBPM Version 14.4

SERVICE-CONSUMER = "OBVAM_OBPM"

SERVICE-CONSUMER-SERVICE= "StrcAddressServiceReopen"

Request:

```

{
    "department": "",
    "subDepartment": "",
    "streetName": "",
    "buildingNumber": "",
    "buildingName": "",
    "floor": "",
    "postbox": "",
    "room": "",
    "postcode": "",
    "townName": "",
    "townLocationName": "",
    "districtName": "",
    "countrySubDivision": "",
    "strrCountry": "",
    "virtualAccountNo": "",
    "branchId": ""
}

```

Response:

```

{
  "MSGSTAT": ""
}

```

CreateExtVirtualAcc

This API enables the user to create external virtual account.

Request / Response for OBPM Version 14.4

SERVICE-CONSUMER = "OBVAM_OBPM"

SERVICE-CONSUMER-SERVICE= "CreateExtVirtualAcc"

Request:

```
{
  "countryCode": "",
  "address4": " ",
  "address3": "",
  "address2": "",
  "address1": "",
  "ecaCheckReq": "",
  "accountClass": "",
  "acStatDormant": "",
  "acStatFrozen": "",
  "glStatBlocked": "",
  "acStatNoDr": "",
  "acStatNoCr": "",
  "acOpenDate": "",
  "custAcName": "",
  "custAcCcy": "",
  "customerNo": "",
  "sourceSystemAccBrn": "",
  "sourceSystemAccNo": "",
  "sourceSystem": "",
  "custAcIban": "",
  "hostCode": "",
  "custAccountNo": "",
  "branchId": ""
}
```

Response:

```
{
  "MSGSTAT": ""
}
```

ModifyExtVirtualAcc

This API enables the user to modify external virtual account.

Request / Response for OBPM Version 14.4

SERVICE-CONSUMER = "OBVAM_OBPM"

SERVICE-CONSUMER-SERVICE= "ModifyExtVirtualAcc"

Request:

```
{
  "countryCode": "",
  "address4": " ",
  "address3": "",
```

```

"address2": "",
"address1": "",
"ecaCheckReq": "",
"accountClass": "",
"acStatDormant": "",
"acStatFrozen": "",
"glStatBlocked": "",
"acStatNoDr": "",
"acStatNoCr": "",
"acOpenDate": "",
"custAcName": "",
"custAcCcy": "",
"customerNo": "",
"sourceSystemAccBrn": "",
"sourceSystemAccNo": "",
"sourceSystem": "",
"custAcIban": "",
"hostCode": "",
"custAccountNo": "",
"branchId": ""
}

```

Response:

```

{
  "MSGSTAT": ""
}

```

CloseExtVirtualAcc

This API enables the user to close external virtual account.

Request / Response for OBPM Version 14.4

SERVICE-CONSUMER = "OBVAM_OBPM"

SERVICE-CONSUMER-SERVICE= "CloseExtVirtualAcc"

Request:

```

{
  "countryCode": "",
  "address4": "",
  "address3": "",
  "address2": "",
  "address1": "",
  "ecaCheckReq": "",
  "accountClass": "",
  "acStatDormant": "",
  "acStatFrozen": "",
  "glStatBlocked": "",
  "acStatNoDr": "",
  "acStatNoCr": "",
  "acOpenDate": "",
  "custAcName": "",

```

```

        "custAcCcy": "",
        "customerNo": "",
        "sourceSystemAccBrn": "",
        "sourceSystemAccNo": "",
        "sourceSystem": "",
        "custAcIban": "",
        "hostCode": "",
        "custAccountNo": "",
        "branchId": ""
    }

```

Response:

```

{
  "MSGSTAT": ""
}

```

ReopenExtVirtualAcc

This API enables the user to reopen external virtual account.

Request / Response for OBPM Version 14.4

SERVICE-CONSUMER = "OBVAM_OBPM"

SERVICE-CONSUMER-SERVICE= "ReopenExtVirtualAcc"

Request:

```

{
    "countryCode": "",
    "address4": "",
    "address3": "",
    "address2": "",
    "address1": "",
    "ecaCheckReq": "",
    "accountClass": "",
    "acStatDormant": "",
    "acStatFrozen": "",
    "glStatBlocked": "",
    "acStatNoDr": "",
    "acStatNoCr": "",
    "acOpenDate": "",
    "custAcName": "",
    "custAcCcy": "",
    "customerNo": "",
    "sourceSystemAccBrn": "",
    "sourceSystemAccNo": "",
    "sourceSystem": "",
    "custAcIban": "",
    "hostCode": "",
    "custAccountNo": "",
    "branchId": ""
}

```

Response:

```
{  
  "MSGSTAT": ""  
}
```

1.2.4 Interest and Charges Implementation

This topic provides the API information for Interest and Charges Implementation.

The following APIs are configured for DDA Implementation using Oracle Banking Routing Hub:

1. **fetchgcScIcRate**
 2. **closeIEAccount**
 3. **CREATE_EXT_IC_GRP_PRD**
 4. **fetchAccuredInt**
 5. **CREATE_EXT_IC_GRP**
 6. **liquidateInterest**
 7. **fetchExtlCGrps**
 8. **fetchPrdMapForGrp**
 9. **CREATE_IC_ACCOUNT**
 10. **vdbalMaster**
- SERVICE-CONSUMER - OBVAM_IC
- Host - OBVAM
 - Version - 14.4

Environment variables are used to set values for the headers. Set environment specific values for variables like User ID, Branch code.

Figure 1-15 Edit Service Consumer - Interest and Charges

Edit Service Consumer

Name:

Audit Type:

Environment Variables

Group:

Actions	Name	Value
⋮	ContentType	application/json
⋮	userID	DEB01
⋮	branchCode	000

Save

Refer the [Environment Variable Configuration](#) topic to set the values in **Edit Service Consumer** screen.

The following Service Providers and Consumer Services needs to be configured in Oracle Banking Routing Hub:


- [Service Providers - Interest and Charges](#)
This topic describes about the service providers configuration for Interest and Charges.
- [Consumer Services - Interest and Charges](#)
This topic describes about the consumer services required for Interest and Charges Implementation.

1.2.4.1 Service Providers - Interest and Charges

This topic describes about the service providers configuration for Interest and Charges.

To configure the Interest and Charges services in Oracle Banking Routing Hub, import WSDL / Swagger provided by Interest and charges services.

Figure 1-16 Service Providers - Interest and Charges

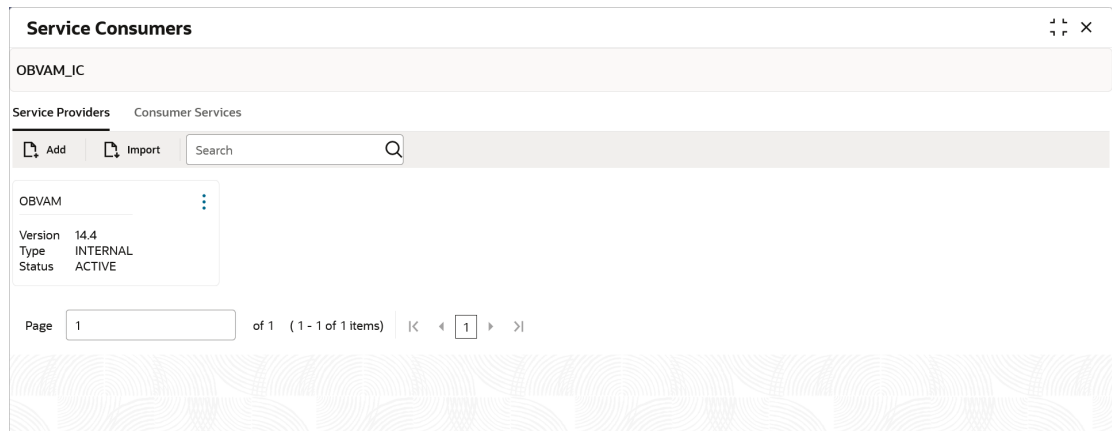

1.2.4.2 Consumer Services - Interest and Charges

This topic describes about the consumer services required for Interest and Charges Implementation.

The below endpoints must be configured under Consumer Services in Oracle Banking Routing Hub:

1. Fetch Interest Rate for A Virtual Account (fetchgcScIcRate)
2. Close Virtual Account (closeIEAccount)
3. Event for account group product mapping (CREATE_EXT_IC_GRP_PRD)
4. Fetch Accrued Interest (fetchAccruedInt)
5. Event to create account group (CREATE_EXT_IC_GRP)
6. Event to Liquidate accrued interest for a Virtual account (liquidateInterest)
7. Fetch Bank Level IC Group (fetchExtICGrps)
8. Fetch Product Map For Group (fetchPrdMapForGrp)
9. Virtual accounts creation to IC system (CREATE_IC_ACCOUNT)
10. Event to trigger Value dated balance fetch (vdbalMaster)

Figure 1-17 Consumer Services - Interest and Charges

Service Consumers		
OBVAM_IC1		
Service Providers Consumer Services		
Add Import Search		
Actions	Name	Description
⋮	fetchPrdMapForGrp	Fetch Product Map For Group
⋮	CREATE_EXT_IC_GRP	Event to create account group
⋮	fetchAccuredInt	Fetch Accured Interest
⋮	fetchgcScIcRate	Fetch Interest Rate For A Virtual Account
⋮	closeIEAccount	Close Virtual Account In OBLM
⋮	liquidateInterest	Event to Liquidate accrued interest for a Virtual account
⋮	vdBalMaster	Posting to vdBalMaster
⋮	fetchExtICGrps	Fetch Bank Level IC Group
⋮	CREATE_EXT_IC_GRP_PRD	Event for account group product mapping
⋮	CREATE_IC_ACCOUNT	Virtual accounts creation to IC system
Page 1 of 1 (1 - 10 of 10 items) < < 1 > >		

fetchgcScIcRate

This API enables the user to fetch the interest rates for a Virtual Account.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "fetchgcScIcRate"

Request:

```
{
  "branch": "string",
  "account": "string",
  "extAccGrp": "string",
  "accGrp": "string",
  "dateFrom": "string",
  "dateTo": "string",
  "ccy": "string",
  "dateType": "string",
}
```

Response:

```
{
  "data":
  [
    {

```

```

    "aclass": "string",
    "productCode": "string",
    "ccyCode": "string",
    "udeEffDt": "string",
    "branchCode": "string",
    "RateCategory": "string",
    "productdesc": "string",
    "GenUdeValList":
    [
      {
        "udeId": "string",
        "udeDesc": "string",
        "udeType": "string",
        "udeValue": 0,
        "rateCode": "string",
        "tdRateCode": "string"
      }
    ]
  },
  "warnings":
  [
    {
      "warningCode": "string",
      "warningDesc": "string"
    }
  ],
  "errors":
  [
    {
      "errorCode": "string",
      "errorDesc": "string"
    }
  ]
}

```

closeIEAccount

This API enables the user to close a Virtual Account.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "closeIEAccount"

Request:

```

{
  "source": "string",
  "branch": "string",
  "acc": "string",
  "currency": "string"
}

```

Response:

```
{
  "warnings":
  [
    {
      "warningCode": "string",
      "warningDesc": "string"
    }
  ],
  "errors":
  [
    {
      "errorCode": "string",
      "errorDesc": "string"
    }
  ]
}
```

CREATE_EXT_IC_GRP_PRD

This API enables the user to generate an event for account group product mapping.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "CREATE_EXT_IC_GRP_PRD"

Request:

```
{
  "accGrp": "string",
  "accGrpDesc": "string",
  "accProdList":
  [
    {
      "productCode": "string",
      "productDescription": "string",
      "ccy": "string",
      "open": "string"
    }
  ]
}
```

Response:

```
{
  "warnings":
  [
    {
      "warningCode": "string",
      "warningDesc": "string"
    }
  ],
  "errors":
```

```
[
  {
    "errorCode": "string",
    "errorDesc": "string"
  }
]
```

fetchAccuredInt

This API enables the user to fetch the accrued Interest.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "fetchAccuredInt"

Request:

```
{
  "brn": string,
  "acc": string,
  "source": string
}
```

Response:

```
{
  "data":
  {
    "brn": "string",
    "acc": "string",
    "source": "string",
    "totalAccrDr": 0,
    "totalAccrCr": 0,
    "accruedAmtList":
    [
      {
        "acc": "string",
        "brn": "string",
        "prod": "string",
        "frmNo": 0,
        "accruedAmt": 0,
        "drcr": "string"
      }
    ]
  },
  "warnings":
  [
    {
      "warningCode": "string",
      "warningDesc": "string"
    }
  ],
  "errors":
```

```
[
  {
    "errorCode": "string",
    "errorDesc": "string"
  }
]
```

CREATE_EXT_IC_GRP

This API enables the user to generate an event to create an account group.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "CREATE_EXT_IC_GRP"

Request:

```
{
  "accGrp": "string"
  "accGrpDesc": "string"
  "extAccGrp": "string"
  "extAccGrpDesc": "string"
  "extAccGrpType": "string"
}
```

Response:

```
{
  "warnings":
  [
    {
      "warningCode": "string",
      "warningDesc": "string"
    }
  ],
  "errors":
  [
    {
      "errorCode": "string",
      "errorDesc": "string"
    }
  ]
}
```

liquidateInterest

This API enables the user to generate an event to liquidate accrued interest for a Virtual account.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "liquidateInterest"

Request:

```
{
  "onliq":
  [
    {
      "branchCode": "string",
      "accountNumber": "string",
      "productCode": "string",
      "liquidationDate": "string"
    }
  ]
}
```

Response:

```
{
  "onliq":
  [
    {
      "msgStat": "string",
      "onliq": {},
      "warnings":
      [
        {
          "warningCode": "string",
          "warningDesc": "string"
        }
      ],
      "errors":
      [
        {
          "errorCode": "string",
          "errorDesc": "string"
        }
      ]
    }
  ]
}
```

fetchExtICGrps

This API enables the user to fetch a Bank-Level IC Group.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "fetchExtICGrps"

Request:

```
{
  "accGrp": "string",
```

```
"extAccGrpType": "string"
}
```

Response:

```
{
  "data":
  {
    "AccGrpList":
    [
      {
        "accGrp": "string",
        "accGrpDesc": "string",
        "extAccGrpType": "string"
      }
    ]
  },
  "errors":
  [
    {
      "errorCode": "string",
      "errorDesc": "string"
    }
  ]
}
```

fetchPrdMapForGrp

This API enables the user to fetch a Product Map for Group.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "fetchPrdMapForGrp"

Request:

```
{
  "accGrp": "string",
  "productCode": "string",
  "ccy": "string"
}
```

Response:

```
{
  "data":
  {
    "IcGrpPrdList":
    [
      {
        "accGrp": "string",
        "accGrpDesc": "string",
        "accProdList":
```

```
[
  {
    "productCode": "string",
    "productDescription": "string",
    "ccy": "string",
    "open": "string"
  }
]
},
"errors":
[
  {
    "errorCode": "string",
    "errorDesc": "string"
  }
]
}
```

CREATE_IC_ACCOUNT

This API enables the user to create a Virtual account for the IC system.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "CREATE_IC_ACCOUNT"

Request:

```
{
  "accMasterList":
  [
    {
      "acc": "string",
      "childAcc": "string",
      "accountClass": "string",
      "accType": "string",
      "acOpenDate": "string",
      "bookAcc": "string",
      "bookBrn": "string",
      "bookCcy": "string",
      "brn": "string",
      "calcAcc": "string",
      "ccy": "string",
      "custNo": "string",
      "consolChgAcc": "string",
      "intStartDate": "string",
      "sourceSystem": "string",
      "sourceSystemBrn": "string",
      "sourceSystemAcc": "string",
      "chargeBookAcc": "string",
      "chargeBookBrn": "string",
      "chargeBookCcy": "string",
      "chgStartDate": "string"
    }
  ]
}
```

```
    }  
  ]  
}
```

Response:

```
{  
  "warnings":  
  [  
    {  
      "warningCode": "string",  
      "warningDesc": "string"  
    }  
  ],  
  "errors":  
  [  
    {  
      "errorCode": "string",  
      "errorDesc": "string"  
    }  
  ]  
}
```

vdbalMaster

This API enables the user to fetch a Virtual account balance.

Request / Response

SERVICE-CONSUMER = "OBVAM_IC"

SERVICE-CONSUMER-SERVICE = "vdbalMaster"

Request:

```
{  
  "type" : "string",  
  "extRefNo" : "string",  
  "sourceCode" : "string",  
  "vdBalList": [  
    {  
      "acc" : "string",  
      "brn": "string",  
      "ccy": "string",  
      "valDt": "string"  
    }  
  ]  
}
```

Response:

```
{  
  "warnings":  
  [  
    {  
      "warningCode": "string",  
      "warningDesc": "string"  
    }  
  ],  
  "errors":  
  [  
    {  
      "errorCode": "string",  
      "errorDesc": "string"  
    }  
  ]  
}
```

```
        "warningCode": "string",  
        "warningDesc": "string"  
    }  
],  
    "errors": null  
}
```

1.2.5 Oracle Banking Liquidity Management Implementation

This topic provides the API information for Oracle Banking Liquidity Management Implementation.

The following API is configured for Oracle Banking Liquidity Management Implementation using Oracle Banking Routing Hub:

1. **getLMAccount**
SERVICE-CONSUMER - OBVAM_OBLM
 - Host - OBVAM
 - Version - 14.4

Environment variables are used to set values for the headers. Set environment specific values for variables like User ID, Branch code.

Figure 1-18 Edit Service Consumer - Oracle Banking Liquidity Management

Edit Service Consumer

×

Name

OBVAM_OBLM_2

Audit Type

Service level configuration ▼

▼ Environment Variables

+

Add ▼

✎

Edit

✖

Delete

Group

OBLM_CRED ▼

Actions	Name	Value
⋮	userID	LMADMIN1
⋮	applID	LMM
⋮	branchCode	LMB

Save

Refer the [Environment Variable Configuration](#) topic to set the values in **Edit Service Consumer** screen.

The following Service Providers and Consumer Services needs to be configured in Oracle Banking Routing Hub:

- [Service Providers - Oracle Banking Liquidity Management](#)
This topic describes about the service providers configuration for Oracle Banking Liquidity Management.
- [Consumer Services - Oracle Banking Liquidity Management](#)
This topic describes about the consumer services required for Oracle Banking Liquidity Management Implementation.

1.2.5.1 Service Providers - Oracle Banking Liquidity Management

This topic describes about the service providers configuration for Oracle Banking Liquidity Management.

To configure the Oracle Banking Liquidity Management in Oracle Banking Routing Hub, import WSDL / Swagger provided by Oracle Banking Liquidity Management.

ORACLE

1-38

Figure 1-19 Service Providers - Oracle Banking Liquidity Management

The screenshot shows the 'Service Consumers' interface. At the top, there's a header 'Service Consumers' with a close button. Below it, the service name 'OBVAM_OBLM' is displayed. The interface has two tabs: 'Service Providers' (selected) and 'Consumer Services'. Under 'Service Providers', there are buttons for 'Add' and 'Import', and a search bar. A dropdown menu for 'OBLM' is open, showing details: Version 14.4, Type INTERNAL, and Status ACTIVE. At the bottom, there's a pagination bar showing 'Page 1 of 1 (1 - 1 of 1 items)' with navigation arrows.

Figure 1-20 Service Providers - Edit Service Provider

The screenshot shows the 'Edit Service Provider' interface. It has a close button at the top right. The main section is titled 'Edit Service Provider'. There are two expandable sections: 'Headers' and 'Service'. The 'Service' section is expanded, showing a 'Type' dropdown menu with options 'WSDL', 'SWAGGER', and 'OTHERS'. The 'WSDL' option is selected. To the right of the dropdown is a 'URL' input field with an 'Import' button. Below the URL field, there's a 'Required' label. At the bottom right, there's a 'Save' button.

1.2.5.2 Consumer Services - Oracle Banking Liquidity Management

This topic describes about the consumer services required for Oracle Banking Liquidity Management Implementation.

The below endpoint must be configured under Consumer Services in Oracle Banking Routing Hub:

1. Get the Liquidity Management account lists (getLMAccount)

Figure 1-21 Consumer Services - Oracle Banking Liquidity Management

Service Consumers		
OBVAM_OBLM		
Service Providers Consumer Services		
Add Import Search		
Actions	Name	Description
	modifyLM	Modify Account
	createLM	Create LM account
	getLMAccount	Get LM Account Lists
Page 1 of 1 (1 - 3 of 3 items) < 1 >		

getLMAccount

This API enables the user to get the Liquidity Management account lists.

Request:

```
{
  "includeAllAccount": "",
  "authStat": "",
  "multiCcyAccountNumber": "",
  "isProspect": "",
  "acyAvailableBal": "",
  "offset": "",
  "isExternal": "",
  "includecloseandunauth": "",
  "recordStat": "0",
  "accountNumber": "1000242",
  "isActive": "",
  "sourceSystemAccNo": "",
  "branchCode": "",
  "isNotional": "",
  "limit": "",
  "customerId": "",
  "currency": "",
  "isResident": ""
}
```

Response:

```
{
  "body": {
    "data": {
      "data": [
        {
          "keyId": "1a939627-4629-4b30-bd10-ebdc01d7ba27",
          "makerId": "OBDX02",
          "makerDateStamp": "2018-11-30T13:05:31.000+00:00",
          "checkerId": "OBDX02",

```

```

"checkerDateStamp": "2018-11-30T13:05:31.000+00:00",
"modNo": 1,
"recordStatus": "O",
"authStatus": "A",
"onceAuth": "Y",
"doerRemarks": null,
"approverRemarks": null,
"sourceSystem": "OBDX",
"sourceSystemAccNo": null,
"iban": null,
"updatedIban": null,
"logCode": "fb79f58f-8206-465d-9bdd-72fb8cccd31b",
"accountNumber": "OBDX_SYSACC_8665",
"accountDescription": "OBDX_SYSACC_8665 Notional
Account",
"branchCode": "HEL",
"bankCode": "0020",
"cityId": "Sydney",
"countryId": "AUS",
"currency": "GBP",
"customerId": "000464",
"customerName": "XXX XXXXXX",
"accCreatedDate": null,
"accOpenDate": "2020-03-26",
"accClosedDate": null,
"acyAvailableBal": null,
"acyCurrentBal": null,
"lastBalUpdateTime": null,
"isActive": "A",
"isExternal": "External",
"isResident": "R",
"isNotional": "Y",
"acyCasaBlockedAmt": null,
"accCategory": "S",
"drLimit": null,
"crLimit": null,
"ilRouteCode": null,
"lineId": null,
"limitCcy": null,
"region": "Asia/Kolkata",
"uncollFundsLimit": null,
"uncollAvailable": null,
"balCompParticipation": null,
"odLimit": null,
"isDebitUnlimited": "N",
"groupCode": null,
"groupDescription": null,
"isNoCredit": null,
"isNoDebit": null,
"isFrozen": null,
"isBlocked": null,
"countryCode": null,
"address4": null,
"address3": null,
"address2": null,

```

```

        "address1": null,
        "isDormant": null,
        "isProspect": "N",
        "isVirtual": null,
        "isICRequired": null,
        "isMultiCurrencyAccount": null,
        "multiCcyAccountNumber": null,
        "noBalanceHandling": "Last Balance",
        "isBalanceOnline": "Y",
        "branchDate": "2020-03-30",
        "isRegulatedDebits": "N",
        "entityID": "HEL_ENTITY",
        "entityName": "HEL_ENTITY_NAME",
        "bankName": "Futura Bank",
        "branchName": "HEL FC UNIVERSAL BANK",
        "countryName": "Australia",
        "simAccount": null,
        "LmmTmMultiCcyAccountDTO": null
    }
},
"paging": {
    "totalResults": 1,
    "links": {
        "next": null,
        "prev": null
    }
}
},
"messages": {
    "keyId": null,
    "status": "SUCCESS",
    "codes": [],
    "requestId": null,
    "httpStatusCode": "OK",
    "overrideAuthLevelsReqd": null
}
}
}

```

1.2.6 Oracle Banking Host to Host Implementation

This topic provides the API information for Oracle Banking Host to Host Implementation.

The following callback API is configured for Oracle Banking Electronic Data Exchange Implementation using Oracle Banking Routing Hub.

1. **parseResponse**
2. **handoffResponse**
3. **outgoingFileCallBackResponse**

SERVICE-CONSUMER - OBVAM_OBEDX

- Host - OBVAM

- Version - 14.6

Environment variables are used to set values for the headers. Set environment specific values for variables like User ID, Branch code.

Figure 1-22 Edit Service Consumer - Oracle Banking Electronic Data Exchange

Edit Service Consumer

Name:

Audit Type:

Environment Variables

Group:

Actions	Name	Value
⋮	userID	EDXWORKFLOW
⋮	applID	OBEDX
⋮	branchCode	006

Save

Refer the [Environment Variable Configuration](#) topic to set the values in **Edit Service Consumer** screen.

The following Service Providers and Consumer Services needs to be configured in Oracle Banking Routing Hub:

- [Service Providers - Oracle Banking Electronic Data Exchange](#)
This topic describes about the service providers configuration for Oracle Banking Electronic Data Exchange Implementation.
- [Consumer Services - Oracle Banking Electronic Data Exchange](#)
This topic describes about the consumer services required for Oracle Banking Electronic Data Exchange Implementation.

1.2.6.1 Service Providers - Oracle Banking Electronic Data Exchange

This topic describes about the service providers configuration for Oracle Banking Electronic Data Exchange Implementation.

To configure the Oracle Banking Electronic Data Exchange in Oracle Banking Routing Hub, import WSDL / Swagger provided by Oracle Banking Electronic Data Exchange.

Figure 1-23 Service Providers - Oracle Banking Electronic Data Exchange

The screenshot shows the 'Service Consumers' interface. At the top, there's a tab for 'OBVAM_OBEDX'. Below it, there are two tabs: 'Service Providers' and 'Consumer Services'. The 'Service Providers' tab is active. It contains a search bar with 'OBEDX' entered. Below the search bar, there's a list of service providers. The first item is 'OBEDX' with a version of '14.4', type 'INTERNAL', and status 'ACTIVE'. At the bottom, there's a pagination bar showing 'Page 1 of 1 (1 - 1 of 1 items)'.

Figure 1-24 Service Providers - Edit Service Provider

The screenshot shows the 'Edit Service Provider' interface. It has a title bar 'Edit Service Provider' with a close button. The form is divided into two main sections. The top section contains fields for 'Product Name' (OBEDX), 'Version' (14.4), 'Type' (INTERNAL), and 'Active' (a toggle switch). The bottom section is titled 'Service' and contains a table with two columns: 'Type' and 'URL'. The 'Type' column has a dropdown menu with 'WSDL' selected. The 'URL' column is empty and has a 'Required' label. To the right of the 'URL' field is an 'Import' button. Below the table, there's a 'Save' button.

Type	URL
WSDL	

In Request Transformation, template needs to be added for ParseResponse consumer service.

```
{
  "external-parser-output":
  {
    "output-file":$custom.toJson($body)
  }
}
```

Figure 1-25 View Transformation



1.2.6.2 Consumer Services - Oracle Banking Electronic Data Exchange

This topic describes about the consumer services required for Oracle Banking Electronic Data Exchange Implementation.

The following callback API is configured for Oracle Banking Electronic Data Exchange Implementation using Oracle Banking Routing Hub

Figure 1-26 Consumer Services - OBVAM_OBEDX

Service Consumers		
OBVAM_OBEDX		
Service Providers Consumer Services		
Actions	Name	Description
⋮	postFileDetails	Callback with ack file
⋮	ParseResponse	Callback with parsed response
⋮	HandoffResponse	Callback with handoff response

Page 1 of 1 (1 - 3 of 3 items) | < 1 >

Figure 1-27 Edit Transformation - OBVAM_OBEDX

Edit Transformation

Name

T1

Active

☒

Product Processor

OBEDX 14.4

Implementation

OBEDX_Default

Service

ParseResponse - /parsedRespc

Service

Headers

Actions	Name	Value
⋮	userId	EDXWORKFLOW
⋮	appId	OBEDX

Save

HandoffResponse

Request:

```
{
  "fileRefId": 110634,
  "internalRefId": null,
  "workflowInstanceId": "",
  "fileStatus": "",
  "cacheVersion": 0,
  "fileOriginalName": "",
  "fileModifiedName": "",
  "fileSize": 692,
  "formatName": null,
  "createdBy": null,
  "createdDate": 1651721400000,
  "modifiedBy": null,
  "modifiedDate": 1651721405000,
  "transactionId": "",
  "transactionName": null,
  "transactionModNo": 1,
  "formatId": "",
  "formatModNo": 1,
  "channelId": "",
  "channelModNo": 1,
  "corporateId": "",
  "corporateModNo": 1,
  "corporateRef": null,
  "totalRecords": 2,
  "successRecords": 0,
  "failedRecords": 0,
  "totalAmount": null,
  "totalAmountCurrency": null,
  "messageId": null,
  "initiatingPartyName": null,
  "initiatingPartyId": "",
  "initiatingPartyCD": null,
  "initiatingPartyAddress": {},
  "groupStatus": null,
  "groupStatusReasonCode": null,
  "noOfHandoff": null,
  "handoffId": null,
  "corelationLevel": null,
  "recordPersist": false,
  "chunkSize": 2,
  "chunkIndex": 1,
  "totalChunks": 1,
  "retryCount": 0,
  "retryForChunk": [],
  "fieldData": {
    "handoffId": null,
    "initiatingPartyName": null
  },
  "recordList": [{
```

```

"recordId": 971614727779409900,
"fileRefId": 110634,
"modifiedBy": "",
"modifiedDate": 1523052010000,
"txnStatus": "",
"statusCodes": "",
"transactionId": "",
"transactionModNo": 1,
"createdDate": null,
"createdBy": null,
"fxRate": null,
"convertedCurrency": null,
"convertedAmount": null,
"fieldData": {
  "odStartDate": "",
  "virtualAccountName": "",
  "debitTxnsAllowed": "",
  "fixedAmtFromPool": null,
  "odEndDate": "",
  "transferInVirAccNo": null,
  "accountPurpose": "",
  "action": "new",
  "addressLine1": "",
  "buildingNumber": "",
  "addressLine2": "",
  "addressLine3": "",
  "addressLine4": "",
  "pincode": "",
  "townName": "",
  "overdraftSanctionAmount": null,
  "defaultAccCcy": "",
  "postBox": "",
  "virtualParentAcc": null,
  "realCustomerNo": "",
  "branchCode": "",
  "virtualEntityId": "",
  "transferOutVirAccNo": null,
  "buildingName": "",
  "structureCode": null,
  "postCode": "",
  "virtualAccountNo": null,
  "interestCalcReq": "N",
  "realAccountBrn": null,
  "ibanAccNo": null,
  "countrySubDivision": "",
  "realAccountCcy": null,
  "accountFrozen": "N",
  "subDepartment": "",
  "realAccountNo": null,
  "streetName": "",
  "ibanRequired": "",
  "countryCode": "",
  "balChkForDebits": "",
  "department": "",
  "floor": "",

```

```

        "virtualAccProduct": "",
        "townLocationName": "",
        "districtName": "",
        "overdraftAllowed": "",
        "creditTxnsAllowed": "",
        "strrCountry": "",
        "room": "",
        "realAccLinkage": "",
        "remarks": "",
        "balAvailabilityOptions": ""
    },
    "exceptionList": [{
        "exceptionCode": "",
        "exceptionArgs": "",
        "lineNo": 1,
        "CreatedDate": null
    }]
},
"exceptionList": []
}

```

Response:

```

{
  "body": {
    "messages": {
      "status": "SUCCESS",
      "codes": [{
        "information": true,
        "override": false,
        "error": false,
        "overrideAuthLevelsReqd": 0,
        "desc": "Record Created successfully",
        "code": "EDX-HCB-000",
        "language": "ENG",
        "type": "I"
      }],
      "httpStatusCode": "OK"
    },
    "data": {
      "links": []
    }
  }
}

```

ParseResponse

Request:

```

{
  "fileRefId": 110635,
  "internalRefId": null,
  "workflowInstanceId": "",
  "fileStatus": "",

```

```

"cacheVersion": 0,
"fileOriginalName": "",
"fileModifiedName": "",
"fileSize": 692,
"formatName": "CSV",
"createdBy": null,
"createdDate": 1651721490130,
"modifiedBy": null,
"modifiedDate": null,
"transactionId": "",
"transactionName": "Open Virtual Account",
"transactionModNo": 1,
"formatId": "",
"formatModNo": 1,
"channelId": "",
"channelModNo": 1,
"corporateId": "",
"corporateModNo": 1,
"corporateRef": null,
"totalRecords": 2,
"successRecords": 0,
"failedRecords": 0,
"totalAmount": null,
"totalAmountCurrency": null,
"messageId": null,
"initiatingPartyName": null,
"initiatingPartyId": "",
"initiatingPartyCD": null,
"initiatingPartyAddress": {},
"groupStatus": null,
"groupStatusReasonCode": null,
"noOfHandoff": null,
"handoffId": null,
"corelationLevel": null,
"recordPersist": false,
"chunkSize": 2,
"chunkIndex": 1,
"totalChunks": 1,
"retryCount": 0,
"retryForChunk": [
    0
],
"fieldData": {
    "handoffId": null,
    "initiatingPartyName": null
},
"recordList": [{
    "recordId": 971615103983312900,
    "fileRefId": 110635,
    "modifiedBy": null,
    "modifiedDate": null,
    "txnStatus": "",
    "statusCodes": null,
    "transactionId": "",
    "transactionModNo": 1,

```

```
"createdDate": null,
"createdBy": "",
"fxRate": null,
"convertedCurrency": null,
"convertedAmount": null,
"fieldData": {
  "odStartDate": "",
  "accLiqdAllowed": "",
  "virtualAccountName": "",
  "debitTxnsAllowed": "Y",
  "fixedAmtFromPool": "",
  "odEndDate": "1990-01-01",
  "transferInVirAccNo": "",
  "accountPurpose": "",
  "action": "new",
  "addressLine1": "",
  "buildingNumber": "88",
  "addressLine2": "",
  "addressLine3": "",
  "addressLine4": "",
  "pincode": "",
  "townName": "",
  "defaultAccCcy": "",
  "postBox": "",
  "virtualParentAcc": "",
  "realCustomerNo": "",
  "branchCode": "",
  "virtualEntityId": "",
  "transferOutVirAccNo": "",
  "buildingName": "",
  "structureCode": "",
  "postCode": "",
  "virtualAccountNo": "",
  "interestCalcReq": "",
  "realAccountBrn": "",
  "ibanAccNo": "",
  "countrySubDivision": "",
  "realAccountCcy": "",
  "accountFrozen": "",
  "subDepartment": "",
  "realAccountNo": "",
  "streetName": "",
  "ibanRequired": "",
  "countryCode": "",
  "balChkForDebits": "",
  "fixedAmount": "",
  "department": "",
  "floor": "8",
  "virtualAccProduct": "",
  "townLocationName": "",
  "districtName": "",
  "overdraftAllowed": "",
  "creditTxnsAllowed": "",
  "strrCountry": "",
  "room": "",
```

```

        "realAccLinkage": "",
        "remarks": "",
        "balAvailabilityOptions": ""
    },
    "exceptionList": [{
        "exceptionCode": "",
        "exceptionArgs": "",
        "lineNo": 1,
        "CreatedDate": 1651721492536
    }]
}],
"exceptionList": []
}

```

Response:

```

{
  "body": {
    "messages": {
      "status": "SUCCESS",
      "codes": [{
        "information": true,
        "override": false,
        "error": false,
        "overrideAuthLevelsReqd": 0,
        "desc": "Record Created successfully",
        "code": "EDX-PCB-000",
        "language": "ENG",
        "type": "I"
      }],
      "httpStatusCode": "OK"
    },
    "data": {
      "links": []
    }
  }
}

```

postFileDetails

Request:

```

{
  "ackFileDTO": [
    {
      "index": 1,
      "type": "TEXT",
      "content":
        "{\\"fileRefId\\":16652,\\"ackfileRefId\\":16652,\\"ackfileName\\":\\"ACME_CSV
        _Open
        Virtual
        Account_20221010000004\\",\\"ackfileChannelName\\":\\"AutoCorpOutgoing\\"}
    ]
  }
}

```

```
\\"ackResponseIdentifier\\":\\"RESPONSE_FILE\\",\\"ackfileStatus\\":\\"EDX-
COF-000\\",

\\"chunkSize\\":0,\\"chunkIndex\\":0,\\"totalChunks\\":0,\\"totalRecords\\":1,
  \\"recordList\\":
  [{\\"recordId\\":1033332842200104960,\\"lineNo\\":null,
    \\"status\\":\\"EDX-COR-000\\",\\"exceptionList\\":
    []}]}"
    }
  ],
  "file":
  [
    {
      "fileName": "ACME_CSV_Open Virtual
Account_20221010000004.csv",
      "file": "file_0",
      "index": 0,
      "type": "FILE"
    }
  ]
}
```

Response:

```
{
  "headers": {},
  "body": {
    "data": {
      "messages": {
        "status": "SUCCESS",
        "codes": [
          {
            "information": false,
            "override": false,
            "error": false,
            "code": "EDX-ADS-009"
          }
        ]
      }
    },
    "messages": {
      "keyId": null,
      "status": "SUCCESS",
      "codes": [],
      "requestId": null,
      "httpStatusCode": "OK",
      "overrideAuthLevelsReqd": null
    }
  }
}
```

Index

D

DDA Implementation, [1-2](#)

E

Environment Variable Configuration, [1-3](#)

EXTERNAL ACCOUNT Implementation, [1-10](#)

I

Interest and Charges Implementation, [1-25](#)

O

Oracle Banking Host to Host Implementation,
[1-42](#)

Oracle Banking Liquidity Management
Implementation, [1-37](#)

Oracle Banking Payments Implementation, [1-15](#)