# Oracle FCCM Transaction Filtering Cloud Service Matching Guide





Oracle FCCM Transaction FIltering Cloud Service Matching Guide, Release 24.2.1

F94120-01

Copyright © 2015, 2024, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

# Contents

| Preface  |
|----------|
| Audience |
|          |

| летр                        | V  |
|-----------------------------|----|
| Related Resources           | V  |
| Diversity and Inclusion     | V  |
| Documentation Accessibility | V  |
| Conventions                 | vi |
| Comments and Suggestions    | vi |
|                             |    |

## 1 Introduction

# 2 General matching strategy

| 2.1 | Identifier preparation | 2-1 |
|-----|------------------------|-----|
| 22  | Matching               | 2-1 |

# 3 Scoring Method

| 3.1  | Jaro Winkler    | 3-1 |
|------|-----------------|-----|
| 3.2  | Levenshtein     | 3-1 |
| 3.3  | Individual Name | 3-2 |
| 3.4  | Individual SAN  | 3-5 |
| 3.5  | Individual PEP  | 3-6 |
| 3.6  | Individual EDD  | 3-6 |
| 3.7  | Entity Name     | 3-6 |
| 3.8  | Entity SAN      | 3-7 |
| 3.9  | Entity PEP      | 3-7 |
| 3 10 | Entity EDD      | 3-7 |



## 4 Rulesets

| 4.1 Out | t of the Box Rulesets                      | 4-1 |
|---------|--|-----|
| Transli | iteration                                  |     |
| 5.1 Inp | out fields for Swift and Fedwire Screening | 5-1 |
| 5.1.1   | Name and Address                           | 5-2 |
| 5.1.2   | Country                                    | 5-2 |
| 5.1.3   | City                                       | 5-2 |
| 5.1.4   | Identifier                                 | 5-3 |
| 5.1.5   | Goods                                      | 5-3 |
| 5.1.6   | Port                                       | 5-3 |
| 5.1.7   | Narrative Name                             | 5-4 |
| 5.1.8   | Narrative Country                          | 5-4 |
| 5.1.9   | Narrative City                             | 5-4 |
| 5.1.10  | 0 Narrative Identifier                     | 5-5 |
| 5.1.11  | 1 Narrative Goods                          | 5-5 |
| 5.1.12  | 2 Narrative Ports                          | 5-5 |
| 5.1.13  | 3 Stop Keywords                            | 5-6 |
| 5.2 Inp | out fields for ISO Screening               | 5-6 |
| 5.2.1   | Name and Address                           | 5-6 |
| 5.2.2   | Country                                    | 5-7 |
| 5.2.3   | City                                       | 5-7 |
| 5.2.4   | Identifier                                 | 5-8 |
| 5.2.5   | Narrative Name                             | 5-8 |
| 5.2.6   | Narrative Country                          | 5-8 |
| 5.2.7   |  | 5-8 |
| 5.2.8   | Narrative Identifier                       | 5-9 |
| 529     | Ston Keywords                              | 5-0 |



## **Preface**

Matching Guide provides a flexible and customizable strategy for matching customer records to watch list records for Oracle Financial Crime and Compliance Management Transaction Filtering Cloud Service.

## **Audience**

This document is intended for users who are responsible for provisioning and activating Oracle FCCM Cloud services or for adding other users who would manage the services, or for users who want to develop Oracle Cloud applications.

# Help

Use Help Icon to access help in the application. If you don't see any help icons on your page, click your user image or name in the global header and select Show Help Icons. Not all pages have help icons. You can also access the https://docs.oracle.com/en/ to find guides and videos.

## Related Resources

For more information, see these Oracle resources:

- Oracle Public Cloud: http://cloud.oracle.com
- Community: Use <a href="https://community.oracle.com/customerconnect/">https://community.oracle.com/customerconnect/</a> to get information from experts at Oracle, the partner community, and other users.
- Training: Take courses on Oracle Cloud from https://education.oracle.com/oracle-cloud-learning-subscriptions.

# **Diversity and Inclusion**

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

# **Documentation Accessibility**



For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

#### **Access to Oracle Support**

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <a href="http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info">http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs</a> if you are hearing impaired.

## Conventions

The following text conventions are used in this document:

| Convention | Meaning  |
|------------|--|
| boldface   | Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.         |
| italic     | Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.                          |
| monospace  | Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter. |

# **Comments and Suggestions**

Please give us feedback about Oracle Applications Help and guides! You can send an e-mail to: https://support.oracle.com/portal/.



1

# Introduction

Oracle Financial Crime and Compliance Management Transaction Filtering Cloud Service makes use of the Cloud Matching Service, which provides a flexible and customizable strategy for matching customer records to watch list records. Sanctions screening typically requires the business to employ tightly-defined, zero-tolerance matching policies that will identify every possible match against a sanctions list. In these cases, the additional review work of lower probability matches will be necessary. By contrast, a business carrying out PEP screening may choose a strategy of finding and investigating only the most likely matches against the PEP list, and the additional work required to confirm or eliminate weaker matches may not be cost-effective for the business. Oracle Financial Crime and Compliance Management employs matching rules widget to configure the rules for screening. These can be enabled and disabled as needed, to tune the behavior of Oracle Financial Crime and Compliance Management Cloud Service to your requirements. The matching rules are built around name matching. Other identifiers are also used in the matching rules, but their main purpose is to rank matches by strength, and thereby to enable a most-likely approach to review potential matches.

For example, strong matches to Sanctions lists should be regarded as the most urgent matches, requiring immediate attention. Strong matches to PEP records will require follow-up, but may not be so urgent. Looser matches to PEP records may not be worth the time and operational cost of review. In general, the looser the match rule, the more likely it is to raise false positives. It is not possible to eliminate all false positives, especially if there is a requirement to identify all true matches. Tuning the matching strategy is, therefore, a trade-off between the proportion of true matches that are not detected and the work required to manually eliminate false positives. This will be evident in the examples in this document.



2

# General matching strategy

Provides a brief description of the general strategy used in Oracle Financial Crime and Compliance Management Cloud Service.

It consists of three main components: identifier preparation, clustering, and matching.

# 2.1 Identifier preparation

There are some differences between the structure of data sets that always need to be normalized before clustering and matching, so that the matching process does not need to repeat the configuration of transformations on each comparison.

Identifier preparation is used to ensure that the records conform to a pre-defined data structure which can be used by the rest of the matching process, and to eliminate common forms of variance between the records (such as spelling variants of given names and abbreviations of frequently used tokens).

# 2.2 Matching

Once the working and watch list records have been divided into clusters, the rows within each cluster are compared to one another according to the match rules defined for the matching processor. Each match rule defines a set of criteria, specified as comparisons, that the pair of records must satisfy in order to qualify as a match under that rule. The match rule also defines a decision to be applied to any records which satisfy the conditions of the rule. Most rules have a Review decision, meaning matches that hit the rule need to be reviewed. However, there are also elimination rules, where if the records being compared meet the rule's criteria, a No Match decision is reached, and the two records will not be considered a match.

The rules are applied as a decision table, so if a pair of records qualifies as a match under a rule higher in the table, it will not be compared using any rules below that. All rules are configured to operate on a case-insensitive basis. Unless stated otherwise, all noise and whitespace characters are removed or normalized before matching.

Matches are generated based on a defined set of attributes for each rule. A weighted average of the score is generated for each of the attribute level matches.

TF explicitly passes the strings as values in the request which forms "the strings to be matched" against "all the values in a column name". Then, based on the matches received for the source string from search engine, the score and the feature vector for the matched strings (source and target) are generated. Scores which exceed the configured thresholds are taken and collected.

#### **Example 1:**

Consider the following match details:

- Evaluation Logic-> 46,4,26
- Evaluation score -> 0.88



- Word Match count (WMC\_1) >= 2
- Abbreviated and CMP >=66

If the first name in **Mapping Source Attribute** column and **Target Attribute** column matched with a score of 0.88 and the Set threshold value is 0.75. The first name score is greater than the threshold value. Then 0.88x100x weightage (0.8) is provided in matching rule which gives you the score -> 70.4.

If **Mapping Source Attribute** column and **Target Attribute** column has the city data and the score value doesn't cross the provided threshold then it will not contribute to the score. Score is still 70.4

If city data cross the provided threshold, then it will contribute to the score as 100 (exact match). Then 100x0.05x weightage  $(0.05) \Rightarrow 5$  is provided in matching rule which gives you the score 75.8.

If **Mapping Source Attribute** column and **Target Attribute** column has no city data, then score will cross the provided threshold. Then 50x0.05 => 2.5 is provided in matching rule which gives you the score 72.9.

Similarly, if other column data matches and score crosses the threshold, then the score will be added.

**Table 2-1** Match Types Descriptions and Examples

| Ruleset Name                  | Source Node Type  | Target Node Type   |
|-------------------------------|---|--|
| Exact                         | Considers two values and determines whether they match exactly. Applies only if Exact Match is selected. It does not apply when using Fuzzy Match.  | If the source attribute is "John smith" and target attribute is "John smith", then the match is an exact match.  |
| Character Edit Distance (CED) | Considers two String tokens and determines how closely they match each other by calculating the minimum number of character edits (deletions, insertions and substitutions) needed to transform one value into the other. | For entities, stop words are not considered.  If the source attribute is "John smith" and target attribute is "Jon smith", then the CED is 1 since the letter 'h' is missing between the source attribute and target attribute.  If the entity names are Oracle Financial Corporation and Finance Orcl Pvt. Ltd., then only Oracle Financial and Finance Orcl are considered for matching as corporation, Pvt., and Ltd. are stop words.  The CED for Orcl is 2 and CED for finance is 3, so the overall CED is 3. |



Table 2-1 (Cont.) Match Types Descriptions and Examples

| Ruleset Name                     | Source Node Type   | Target Node Type   |
|----------------------------------|--|--|
| Character Match Percentage (CMP) | Determines how closely two values match each other by calculating the Character Edit Distance between two String tokens and considering the length of the shorter of the two tokens, by character count.                       | If the source attribute is "John smith" and target attribute is "Jon smith", then the CMP is calculated using the formula (length of shorter string – CED) * 100 / length of longer string. In this case, it is (9-1) * 100/8 = 77.77%.  |
| Word Edit Distance (WED)         | Determines how well multi-<br>word String values match each<br>other by calculating the<br>minimum number of word edits<br>(word insertions, deletions and<br>substitutions) required to<br>transform one value to<br>another. | "Jon smith", then the WED is calculated by checking the  |
|                                  |  | For example, the source string is Yohan Russel Smith and target string is Smith Johaan Rusel. First, we determine the CED for each word:  Yohan matches with Johann with a CED of 2.  Russel matches with Rusel with a CED of 1.  Smith matches with Smith with a CED of 0.  If we consider a character tolerance of 1, we can observe the following:  Russel with a character tolerance of 1 match with Rusel.  Smith with a character tolerance of 0 matches with Smith.  Yohan with a character tolerance of 2 does not match with Johann as the character tolerance is 1.  Based on these observations, we can conclude that one word does not match. This |



Table 2-1 (Cont.) Match Types Descriptions and Examples

| Ruleset Name                            | Source Node Type   | Target Node Type   |
|---|--|--|
| Word Match Percentage<br>(WMP)          | Determines how closely, by percentage, two multi-word values match each other by calculating the Word Edit Distance between two Strings and taking into account the length of the longer or the shorter of the two values, by word count.  | The WMP is calculated using the formula (WMC/minimum word length) * 100. If the source attribute is "John smith" and target attribute is "Jon smith", then the WMP is calculated as (2/5) * 100 = 40 %.  |
| Word Match Count (WMC                   | Determines how closely two multi-word values match each other by calculating the Word Edit Distance between two Strings and taking into account the length of the longer or the shorter of the two values, by word count.  | The WMC is like WED, with the difference being that WMC gives the number of matches between 2 words and WED gives the number of words that did not match between 2 words. If the source attribute is "John smith" and target attribute is "Jon smith", then the WMC is 2 as two words have matched (allowing for the character tolerance). |
| Exact String Match                      | Considers two String values and determines whether they match exactly.   |  |
| Abbreviation                            | Checks if the first character matches with the first character of source and target values.  |  |
| Starts With                             | Compares two values and determines whether either value starts with the whole of the other value. It therefore matches both exact matches and matches where one of the values starts the same as the other but contains extra information.   |  |
| Jaro Winkler or Reverse Jaro<br>Winkler | The Jaro Winkler similarity is the measure of the edit distance between two strings. Click here for more information. In the Reverse Jaro Winkler, matches are generated even if the string is reversed. For example, if the source string is Mohammed Ali and the target string is Ali Mohammed, then the similarity = 1. | If the source string is Mohammed Ali and the target string is Mohammed Ali, then the similarity = 1.   |



Table 2-1 (Cont.) Match Types Descriptions and Examples

| Ruleset Name | Source Node Type  | Target Node Type  |
|--------------|---|---|
| Levenshtein  | The Levenshtein Distance (LD) or edit distance provides the distance, or the number of edits (deletions, insertions, or substitutions) needed to transform the source string into the target string. Click here for more information. | For example, if the source string is Mohamed and the target string is Mohammed, then the LD = 1, because there is one edit (insertion) required to match the source and target strings. |

Example 2:

Source String: Mrs. Eisa Carrera Ben


Target String: Isa Carrera Bin

Synonym List: Ayssa, Eisa, Isa, Issa

Stopwords: Mr., Mrs., Dr., Mullah

A sample score is mentioned in the example for illustration.

Figure 2-1 Synonyms and Stopwords for OS and MS

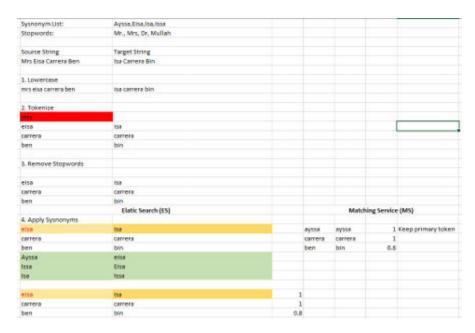



3

# **Scoring Method**

The scoring methods used in the entity resolution component are as follows:

- Jaro Winkler
- Levenshtein
- Individual Name
- Individual SAN
- Individual PEP
- Individual EDD
- Entity Name
- Entity SAN
- Entity PEP
- Entity EDD

## 3.1 Jaro Winkler

This algorithm gives high scores for the following strings:

- The strings contain the same characters but within a certain distance from one another.
- The order of the matching characters is the same.

To be precise, the distance of finding a similar Character is one Character less than half of the length of the longest string. So if the longest string has a length of five, a character at the start of string 1 must be found before or on ((5/2)-1) ~ 2nd position in the string 2. This is considered a good match. Hence, the algorithm is directional and gives a high score if matching is from the beginning of the strings.

#### For example:

- textdistance.jaro\_winkler("mes", "messi") 0.86
- textdistance.jaro\_winkler("crate", "crat") 0.96
- textdistance.jaro winkler("crate", "atcr") 0.0

In the first case, as the strings match from the beginning, a high score is given. Similarly, in the second case, only one Character was missing, and that is also at the end of string 2, a very high score is given. In the third case, the last two Characters of string 2 are rearranged by bringing them at the front, resulting in 0% similarity.

## 3.2 Levenshtein

The Levenshtein Distance (LD) or edit distance provides the distance or the number of edits (deletions, insertions, or substitutions) needed to transform the source string into the target string. For example, if the source string is Mohamed and the target string is Mohammed, the

LD = 1 because one edit (insertion) must match the source and target strings. For more information, see the Website.

## 3.3 Individual Name

This is a bespoke rules-based algorithm that has been optimized for determining individual name matches. Generation of the final matching score for Individual Name is based on the combination of scores generated by the following feature vector in the scoring method:

Abbreviation: Checks if the first Character matches with the first Character of source and target tokens.

#### Example:

- String 1: "S Turner"
- String 2: "Steve Turner"

String1 is an abbreviated string for string2.

Character Edit Distance (CED): The Character Edit Distance comparison
compares two String tokens and determines how closely they match each other by
calculating the minimum, and the maximum number of character edits (deletions,
insertions, and substitutions) needed to transform one value into the other.

It compares each token in a string with each token of another string and finds the minimum edits we need to convert one token to another. Maximum CED score that is required to convert one token to another token in a string.

The stopwords for Individual Names are Mr., Mrs, and Ms.

#### **Example:**

- String1: "Mr Jerrod Benito Carrera"
- String2: "JOSE BENITO CABRERA"
- Stopword: Mr.

Jerrod matches with JOSE à CED: 5 (CED MAX))

Benito matches with BENITO à CED: 0 (CED MIN)

Carrera matches with CABRERA à CED: 1

Character Match Percentage (CMP): The Character Match Percentage
comparison determines how closely two values match each other by calculating
the Character Edit Distance between two String tokens and taking into account the
shorter length of the two tokens by character count.

CMP = (MCL - CED) \* 100 / MCL

- CMP = Character match percentage
- MCL = Maximum character Length
- Exact String Match: The Exact String Match comparison is a simple comparison that determines whether or not two String values match. Checks if all the tokens are exact to each other. It can be in any order.

#### Example:

- String 1: Ram Lakshaman
- String 2: Lakshaman Ram



String 3: Ram Lakshaman

String 1, String 2, and string 3 are exact.

• Starts With: The Starts With comparison compares two values and determines whether either value starts with the whole of the other value. It, therefore, matches both exact matches and matches where one of the values starts the same as the other but contains extra information.

Checks if all the tokens start with the respective token in the target tokens.

#### Note:

Whichever token is smaller (either in source or target), that token will be considered compared with the other token (of longer length). It should be in order.

- Starts With First: It is similar to Starts With. Starts with the first token only.
- **Metaphone**: Checks if strings sound like. It is similar for hearing, but spelling may be different. It encodes a string into a double Metaphone value.
- **Tokenize Jaro**: Checks similarity is the measure between two strings. It tokenizes source and target strings, then uses the Jaro Winkler algorithm to calculate the score between tokens, and then consolidates the scores to a single score by taking the average.
- Word Edit Distance (WED): The Word Edit Distance comparison determines how well
  multi-word String values match each other by calculating the minimum number of word
  edits (word insertions, deletions, and substitutions) required to transform one value to
  another.

So WED is similar to CED, where instead of character edits, we find the word edits.

In WED, we have an additional parameter called "character tolerance." Character tolerance allows the user to have a character tolerance in words, i.e. how many Character edits can it allow in each token for one token to match another one.

WED in simple words is: Number of words that did not match with the target words (after allowing the character tolerance)

#### Example:

- String 1: "Yohan Russel Smith"
- String 2: "Smith Johaan Rusel"

Yohan matches with Johann - CED: 2

Russel matches with Rusel - CED: 1

Smith matches with Smith - CED: 0

- If we have a character tolerance of "1,". The number of WED will be: 1
  - \* Russel, with a character tolerance of 1 matches with Rusel.
  - Smith with character tolerance of 0 matches with Smith.
  - Yohan with character tolerance of 2 does not match with Johann as character tolerance is 1.

One token did not match. WED = 1.

If we have a character tolerance of "2,". The number of WED will be : 0



- \* Russel, with a character tolerance of 1 matches with Rusel.
- Smith with character tolerance of 0 matches with Smith.
- \* Yohan, with a character tolerance of 2, does match with Johann.

All tokens matched. WED = 0.

 Word Match Percentage (WMP): The Word Match Percentage comparison determines how closely two multi-word values match each other by calculating the Word Edit Distance between two Strings and considering the length of the longer or longer or longer, the shorter of the two values, by word count.

In mathematical terms, the Word Match Percentage comparison uses the following formula to calculate its results as the Number of tokens matched:

#### WMP = (WMC / WL) \*100

- WMP: Word Match Percentage
- MWL: Maximum Word Length (i.e., the maximum number of words in the two values being compared)
- WED: Word Edit Distance between two String values, and
- WL: Minimum Word Length, relating to shorter input option
- Word Match Count (WMC): The Word Match Percentage comparison determines how closely two multi-word values match each other by calculating the Word Edit Distance between two Strings and taking into account the length of the longer or, the longer shorter of the two values, by word count.

WMC, in simple words, is the Number of words that did match with the target words (after allowing the character tolerance).

WMC compliments WED, as WMC gives the number of matches between 2 words and WED gives the number of mismatches between 2 words.



Based on the Year of birth, if the match falls beyond +/- 5 years, then the match is eliminated. This is applicable for the Individual PEP and the EDD records.

#### Example 1:

- String 1: "Yohan Russel Smith"
- String 2: "Smith Johaan Rusel"

Yohan matches with Johann - CED: 2

Russel matches with Rusel - CED: 1

Smith matches with Smith - CED: 0

- If we have a character tolerance of "1,". The number of WED will be: 2
  - Russel, with a character tolerance of 1 matches with Rusel.
  - \* Smith with character tolerance of 0 matches with Smith.
  - \* Yohan with character tolerance of 2 does not match with Johann as character tolerance is 1.



One word did not match. So WMC = 2.

- If we have a character tolerance of "2,". The number of WMC will be: 3
  - \* Russel, with a character tolerance of 1 matches with Rusel.
  - \* Smith with character tolerance of 0 matches with Smith.
  - \* Yohan, with a character tolerance of 2, does match with Johann.

All tokens matched. WMC = 3.

## Example 2:

- String 1: "Mr Jerrod Benito Carrera"
- String 2: "JOSE BENITO CABRERA"
- Stopword: Mr. (It will not be considered for calculating the scrore)

The individual feature vector scores with final scrore for the match:

```
{"ced_list": [5, 0, 1], "ced_min": 0, "ced_max": 5, "cmp": 68.42105,
"wed_1": 1, "wed_2": 1, "wmc_1": 2, "wmc_2": 2, "wmp_1": 66.0, "wmp_2":
66.666664, "metaphone": 1, "starts_with": 0, "abbreviation": 1,
"tokenize_jaro": 0.8301587, "exact": 0, "inorderMaxPos": 0, "score": 0.88}
```

| Figure 3-1 | Individual | Name | Score |
|------------|------------|------|-------|
|------------|------------|------|-------|

|     | Mr Jerrod Benito Carrera | JOSE BENITO CABRERA |                        |          |
|-----|--------------------------|---------------------|------------------------|----------|
|     |                          |                     |                        |          |
| CED | Jerrod                   | Jose                | 5                      |          |
|     | Benito                   | BENITO              | 0                      |          |
|     | Carrera                  | CABRERA             | 1                      |          |
|     | Benito                   | BENITO              | CED_MIN                | 0        |
|     | Jerrod                   | Jose                | CED_MAX                | 5        |
|     |                          |                     | CMP                    | 68.42105 |
|     |                          |                     | WED, tolerance=1       | 1        |
|     |                          |                     | WED, tolerance=2       | 1        |
|     |                          |                     | WMC_1                  | 2        |
|     |                          |                     | WMC_2                  | 2        |
|     |                          |                     | WMP_1                  | 66       |
|     |                          |                     | WMP_2                  | 66.66666 |
|     | Benito                   | Benito              | Metaphone:             | 1        |
|     | JBC                      | JBC                 | Abbreviation           | 1        |
|     |                          |                     | Starts With            | 0        |
|     |                          |                     | Exact                  | 0        |
|     |                          |                     | Tokenize_jaro          | 0.830159 |
|     |                          |                     | Individual Name score: | 0.88     |

## 3.4 Individual SAN

This is a bespoke rules-based algorithm that has been optimized for determining Individual Sanctions name matches. The process and methods to generate feature vector are similar to Individual Name. For more details, see Individual Name.



## 3.5 Individual PEP

This is a bespoke rules-based algorithm that has been optimized for determining Individual PEP name matches. The process and methods to generate feature vector are similar to Individual Name. For more details, see Individual Name.

## 3.6 Individual EDD

This is a bespoke rules-based algorithm that has been optimized for determining Individual EDD name matches. The process and methods to generate feature vector are similar to Individual Name. For more details, see Individual Name.

# 3.7 Entity Name

This is a bespoke rules-based algorithm that has been optimized for determining organization name matches. For example, BLUE SKYE COLLECTIONS LTD.

The process and methods to generate feature vector are similar to **Individual Name**. For more details, see **Individual Name**.

The process to derive the final score from the feature vector is different from Individual Name. The stopwords are not considered for computing the score. The stopwords for Entity Name are different from Individual Name.

#### Example:

- String 1: "BLUE SKYE COLLECTIONS LTD"
- String 2: "BLUE SKY THREE LTD"
- Stopword: LTD (It will not be considered for calculating the scrore)

The individual feature vector scores with overall scrore for the match:

```
{"ced_list": [0, 1, 9, 0], "ced_min": 0, "ced_max": 9, "cmp":
54.545456, "wed_1": 1, "wed_2": 1, "wmc_1": 3, "wmc_2": 3, "wmp_1":
75.0, "wmp_2": 75.0, "metaphone": 3, "starts_with": 0, "abbreviation":
0, "tokenize_jaro": 0.8026768, "exact": 0, "inorderMaxPos": 0,
"score": 0.95}
```



Figure 3-2 Individual Name Score

|     | Mr Jerrod Benito Carrera | JOSE BENITO CABRERA |                        |          |
|-----|--------------------------|---------------------|------------------------|----------|
|     |                          |                     |                        |          |
| CED | Jerrod                   | Jose                | 5                      |          |
|     | Benito                   | BENITO              | 0                      |          |
|     | Carrera                  | CABRERA             | 1                      |          |
|     | Benito                   | BENITO              | CED_MIN                | 0        |
|     | Jerrod                   | Jose                | CED_MAX                | 5        |
|     |                          |                     | CMP                    | 68.42105 |
|     |                          |                     | WED, tolerance=1       | 1        |
|     |                          |                     | WED, tolerance=2       | 1        |
|     |                          |                     | WMC_1                  | 2        |
|     |                          |                     | WMC_2                  | 2        |
|     |                          |                     | WMP_1                  | 66       |
|     |                          |                     | WMP_2                  | 66.66666 |
|     | Benito                   | Benito              | Metaphone:             | 1        |
|     | JBC                      | JBC                 | Abbreviation           | 1        |
|     |                          |                     | Starts With            | 0        |
|     |                          |                     | Exact                  | 0        |
|     |                          |                     | Tokenize_jaro          | 0.830159 |
|     |                          |                     | Individual Name score: | 0.88     |

# 3.8 Entity SAN

This is a bespoke rules-based algorithm that has been optimized for determining Sanctions organization name matches. The process and methods to generate feature vector are similar to Individual Name. For more details, see Individual Name.

# 3.9 Entity PEP

This is a bespoke rules-based algorithm that has been optimized for determining PEP organization name matches. The process and methods to generate feature vector are similar to Individual Name. For more details, see Individual Name.

# 3.10 Entity EDD

This is a bespoke rules-based algorithm that has been optimized for determining Entity EDD organization name matches. The process and methods to generate feature vector are similar to Individual Name. For more details, see Individual Name.



4

# Rulesets

The Ruleset facilitates identifying the similarity between two entities (customer, account, and so on) and derives a match. A Ruleset is a set of rules applied to the defined source and target entities and compares the entities' attributes to derive a match. OFS Cloud Service provides ready-to-use rulesets; however, you can modify these rulesets or create your own rulesets.


The process of creating Match Rule (s) is as follows:





The sum of weightage for mappings and groups for each rule must be 1.

Each Ruleset comprises multiple rules. The Ruleset compares the attributes defined in the rules for the source entity with the target entity and applies one of the match scoring mechanisms described in this document. The threshold value is defined in each level.

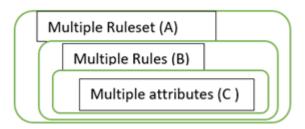

- Ruleset (A): All the matches from the rules should cross this threshold.
- Rule (B): All the attribute thresholds should cross this threshold.
- Attribute (C): Based on the match, it checks across the threshold. Once it crosses the threshold, the record will be considered.

## 4.1 Out of the Box Rulesets

Following are the OOB rulesets for Transaction Filtering:

- Name and Address Ruleset
- Country Ruleset
- City Ruleset

- Identifier Ruleset
- Goods Ruleset
- Port Ruleset
- Narrative Name Ruleset
- Narrative Country Ruleset
- Narrative City Ruleset
- Narrative Identifier Ruleset
- Narrative Goods Ruleset



5

# **Transliteration**

Transliterating a word does not tell you the meaning of the word. It tells you how the how the word is pronounced in a foreign language. This makes the language a little more accessible to people who are unfamiliar with the alphabet of the foreign language. This is opposed to translation, which, put in simple terms, gives you the meaning of a word that's written in another language. For example, the greeting in Arabic is translated as أشكرا in the Arabic script but is transliterated in the Latin script as shukraan.

General transforms provide a general-purpose package for processing Unicode text. They are a powerful and flexible mechanism for handling a variety of different tasks, including:

- Uppercase, lowercase, or title-case conversions
- Normalization
- Hex and character name conversions
- Script-to-script conversion

The reference data sources supported by Customer Screening are all provided in the Latin character set, and some in the original scripts. The screening process can also be used with non-Latin data. Non-Latin data can be screened against the Latin reference data sources which are supported by performing transliteration of data from the non-Latin character set to the Latin character set.

Non-Latin customer data can be screened against non-Latin reference data without any changes to the product, although certain fuzzy text matching algorithms may not be as effective when used to match data with the non-Latin character set. Text is processed on a left-to-right basis.

# 5.1 Input fields for Swift and Fedwire Screening

This section lists the input fields used for the Swift and Fedwire Screening process. The following services are available for the Swift and Fedwire Screening process:

- Name and Address
- Country
- City
- Identifier
- Goods
- Port
- Narrative Name
- Narrative Country
- Narrative City
- Narrative Identifier
- Narrative Goods



- Narrative Ports
- Stop Keywords

## 5.1.1 Name and Address

This matching service is used for the party name and address matching, such as orderer and beneficiary. Party can be an individual or entity. The web service takes the party name, country (if available in the message) and city (if available in the message) as an input and matches them against the watchlist records.

Table 5-1 Input Fields for Name and Address Screening

| Field Name           | Expected Data Format |
|----------------------|----------------------|
| Family Name          | String               |
| Full Name            | String               |
| Original Script Name | String               |
| Given Names          | String               |
| Entity Name          | String               |
| Aliases Given Name   | String               |
| Aliases Family Name  | String               |
| Country Of Residence | String               |
| Nationality          | String               |
| City Name            | String               |
| Street               | String               |
| Place Of Birth       | String               |
| Town Of Birth        | String               |
| Alias City Of Birth  | String               |
|                      |                      |

## 5.1.2 Country

This matching service is used for country matching against the sanctioned country list. The sanctioned country reference data names are Blacklisted Country Ref Data and Blacklisted Cities Ref Data. The blacklisted country extraction happens from different fields such as Country from party address, Country ISO code from BIC, Country ISO from IBAN, and Country confirmation from party location.

Table 5-2 Input Fields for Country Screening

| Field Name        | Expected Data Format |
|-------------------|----------------------|
| Country Name      | String               |
| ISO Country Code  | String               |
| ISO3 Country Code | String               |
| Country Synonyms  | String               |

## 5.1.3 City

This matching service is used for city matching against the sanctioned city list. The sanctioned city reference data names are Blacklisted Country Ref Data and

Blacklisted Cities Ref Data. The blacklisted city information is extracted from the party address field of the input message.

Table 5-3 Input Fields for City Screening

| Field Name    | Expected Data Format |
|---------------|----------------------|
| City Name     | String               |
| ISO City Code | String               |
| City Synonyms | String               |
| Country Name  | String               |

## 5.1.4 Identifier

This matching web service is used for Identifier matching against the sanctioned Identifier list such as Bad BICs Ref Data. This solution supports more legal identifier matching. For example, LEI, passport, and so on.

Table 5-4 Input Fields for Identifier Screening

| Field Name | Expected Data Format |
|------------|----------------------|
| Passport   | String               |
| BIC Code   | String               |
| LEI Code   | String               |
| Identifier | String               |

## 5.1.5 Goods

This matching service is used to extract the goods name and match it name against the prohibited goods list. This list provides country-wise data.

Table 5-5 Input Fields for Good Screening

| Field Name              | Expected Data Format |
|-------------------------|----------------------|
| Goods Name              | String               |
| Goods Code              | String               |
| Goods Synonyms          | String               |
| Import Country ISO Code | String               |
| Export Country ISO Code | String               |

## 5.1.6 Port

This matching web service extracts the port name and matches it to the country while screening. This is done because two countries may not have the same port name, so this avoids duplication. The port name is also matched against the sanctioned port reference data.



**Table 5-6** Input Fields for Port Screening

| Field Name    | Expected Data Format |
|---------------|----------------------|
| Port Name     | String               |
| Port Code     | String               |
| Port Synonyms | String               |
| Country Name  | String               |

## 5.1.7 Narrative Name

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens names against the watchlist records.

Table 5-7 Input Fields for Stop Keywords Screening

| Field Name           | Expected Data Format |
|----------------------|----------------------|
| Full Name            | String               |
| Given Names          | String               |
| Aliases Given Name   | String               |
| Family Name          | String               |
| Aliases Family Name  | String               |
| Entity Name          | String               |
| Original Script Name | String               |

## 5.1.8 Narrative Country

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens country against sanctioned country reference data.

**Table 5-8 Input Fields for Narrative Country Screening** 

| Field Name        | Expected Data Format |
|-------------------|----------------------|
| Country Name      | String               |
| ISO Country Code  | String               |
| ISO3 Country Code | String               |
| Country Synonyms  | String               |

## 5.1.9 Narrative City

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens city against sanctioned city reference data.



Table 5-9 Input Fields for Narrative City Screening

| Field Name    | Expected Data Format |
|---------------|----------------------|
| City Name     | String               |
| City Code     | String               |
| City Synonyms | String               |

## 5.1.10 Narrative Identifier

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens identifier against sanctioned identifier reference data.

Table 5-10 Input Fields for Narrative Identifier Screening

| Field Name | Expected Data Format |
|------------|----------------------|
| Passport   | String               |
| BIC Code   | String               |
| LEI Code   | String               |
| Identifier | String               |

## 5.1.11 Narrative Goods

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens goods against sanctioned goods reference data.

Table 5-11 Input Fields for Narrative Goods Screening

| Field Name     | Expected Data Format |
|----------------|----------------------|
| Goods Code     | String               |
| Goods Name     | String               |
| Goods Synonyms | String               |

## 5.1.12 Narrative Ports

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens ports against sanctioned port reference data.

Table 5-12 Input Fields for Narrative Ports Screening

| Field Name    | Expected Data Format |
|---------------|----------------------|
| Port Code     | String               |
| Port Name     | String               |
| Port Synonyms | String               |



## 5.1.13 Stop Keywords

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens key words against Stop Keywords reference data or Stop Keywords Ref Data.

Table 5-13 Input Fields for Stop Keywords Screening

| Field Name | Expected Data Format |
|------------|----------------------|
| Stop Words | String               |

# 5.2 Input fields for ISO Screening

This section lists the input fields used for the ISO Screening process. The following services are available for the ISO Screening process:

- Name and Address
- Country
- City
- Identifier
- Narrative Name
- Narrative Country
- Narrative City
- Narrative Identifier
- Stop Keywords

## 5.2.1 Name and Address

This matching service is used for the party name and address matching, such as orderer and beneficiary. Party can be an individual or entity. The web service takes the party name, country (if available in the message) and city (if available in the message) as an input and matches them against the watchlist records.

Table 5-14 Input Fields for Name and Address Screening

| Field Name           | Expected Data Format |
|----------------------|----------------------|
| Family Name          | String               |
| Full Name            | String               |
| Original Script Name | String               |
| Given Names          | String               |
| Entity Name          | String               |
| Aliases Given Name   | String               |
| Aliases Family Name  | String               |
| Country Of Residence | String               |



Table 5-14 (Cont.) Input Fields for Name and Address Screening

| Field Name          | Expected Data Format |
|---------------------|----------------------|
| Nationality         | String               |
| City Name           | String               |
| Street              | String               |
| Place Of Birth      | String               |
| Town Of Birth       | String               |
| Alias City Of Birth | String               |
| Date Of Birth       | String               |
| Year of Birth       | String               |
|                     |                      |

# 5.2.2 Country

This matching service is used for country matching against the sanctioned country list. The sanctioned country reference data names are Blacklisted Country Ref Data and Blacklisted Cities Ref Data. The blacklisted country extraction happens from different fields such as Country from party address, Country ISO code from BIC, Country ISO from IBAN, and Country confirmation from party location.

Table 5-15 Input Fields for Country Screening

| Field Name        | Expected Data Format |
|-------------------|----------------------|
| Country Name      | String               |
| ISO Country Code  | String               |
| ISO3 Country Code | String               |
| Country Synonyms  | String               |

## 5.2.3 City

This matching service is used for city matching against the sanctioned city list. The sanctioned city reference data names are Blacklisted Country Ref Data and Blacklisted Cities Ref Data. The blacklisted city information is extracted from the party address field of the input message.

**Table 5-16** Input Fields for City Screening

| Field Name    | Functional Bata Format |
|---------------|------------------------|
| Field Name    | Expected Data Format   |
| City Name     | String                 |
| ISO City Code | String                 |
| City Synonyms | String                 |
| Country Name  | String                 |



## 5.2.4 Identifier

This matching web service is used for Identifier matching against the sanctioned Identifier list such as Bad BICs Ref Data. This solution supports more legal identifier matching. For example, LEI, passport, and so on.

Table 5-17 Input Fields for Identifier Screening

| Field Name | Expected Data Format |
|------------|----------------------|
| BIC Code   | String               |

## 5.2.5 Narrative Name

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens names against the watchlist records.

Table 5-18 Input Fields for Stop Keywords Screening

| Field Name           | Expected Data Format |
|----------------------|----------------------|
| Full Name            | String               |
| Given Names          | String               |
| Aliases Given Name   | String               |
| Family Name          | String               |
| Aliases Family Name  | String               |
| Entity Name          | String               |
| Original Script Name | String               |
|                      |                      |

## 5.2.6 Narrative Country

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens country against sanctioned country reference data.

**Table 5-19 Input Fields for Narrative Country Screening** 

| Field Name        | Expected Data Format |
|-------------------|----------------------|
| Country Name      | String               |
| ISO Country Code  | String               |
| ISO3 Country Code | String               |
| Country Synonyms  | String               |

## 5.2.7 Narrative City

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens city against sanctioned city reference data.

**Table 5-20 Input Fields for Narrative City Screening** 

| Field Name    | Expected Data Format |
|---------------|----------------------|
| City Name     | String               |
| City Code     | String               |
| City Synonyms | String               |

## 5.2.8 Narrative Identifier

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens identifier against sanctioned identifier reference data.

Table 5-21 Input Fields for Narrative Identifier Screening

| Field Name | Expected Data Format |
|------------|----------------------|
| BIC Code   | String               |

## 5.2.9 Stop Keywords

This matching service is used for free text or narrative field screening such as remittance information, reference fields, and sender to receiver information. This particular service screens key words against Stop Keywords reference data or Stop Keywords Ref Data.

Table 5-22 Input Fields for Stop Keywords Screening

| Field Name | Expected Data Format |
|------------|----------------------|
| Stop Words | String               |

