# Oracle® Financial Services Crime and Compliance Management PMF Orchestration Guide





Oracle Financial Services Crime and Compliance Management PMF Orchestration Guide, Release 25.11.01

G48158-01

Copyright © 2022, 2025, Oracle and/or its affiliates.

Primary Authors: (primary author), (primary author)

Contributing Authors: (contributing author), (contributing author)

Contributors: (contributor), (contributor)

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

Introduction		
Key Features of Process Modelling Framework	1	
PMF Service Components	2	
Accessing PMF Services	3	
Using Process Modeller		
Creating a Process Pipeline	1	
Editing a Process Pipeline	2	
About PMF Canvas		
Process Flow	1	
Human Tasks	3	
Using Service Tasks	5	
Managing Design Pipelines	6	
Designing a Pipeline	6	
Modifying a Pipeline	6	
Testing a Process Pipeline	7	
Viewing a Pipeline	7	
Copying a Pipeline	7	
Deleting a Pipeline	7	
Application Rules	8	
Configuring Application Object Model (AOM)	9	
Data Fields	10	
About Process Monitor		
Monitoring a Business Process	1	
Viewing Activity Logs	2	
Calling a PMF Pipeline		
From Application UI	1	

- 6 Adding PMF Tasks in Scheduler Service
- 7 Frequently Asked Questions

# **License Information**

Oracle and third-party license details for installing and configuring OFSAA.

Third-party software tools - OFSAA Licensing Information User Manual Release 8.1.2.0.0.

# **Revision History**

This log lists significant documentation updates:

Revision Date	Details
May 2024	Updated the guide based on the latest version of PMF services.
May 2022	Created document with information about Service name and associated service IDs, to create a process pipeline.

# **About This Guide**

Refer to Oracle Financial Services Crime and Compliance Management Process Modelling Framework User Guide, to understand the PMF services and use the same.

#### **Audience**

This guide is intended for process pipeline developers implementing process pipelines developed by business analysts.

## **Documentation Accessibility**

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <a href="http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc">http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc</a>.

## **Access to Oracle Support**

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <a href="http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info">http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info</a> or visit <a href="http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs">http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs</a> if you are hearing impaired.

#### **Related Resources**

See these Oracle resources:

Oracle FCCM User Documentation

#### Conventions

The following text conventions are used in this document.

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

## Introduction

The Process Modelling Framework (PMF) is a design and execution framework that enables process pipeline developers to implement various pipelines modeled by business analysts.

The Process Modelling Framework consists of process modelling components for modelling Pipelines and process monitor components to monitor instantiated pipelines of Oracle Financial Services (OFS) Cloud services.

The Process Modeller aids in representing the various artifacts required for modelling and provides implementation details of the OFS Cloud services process artifacts.

# Key Features of Process Modelling Framework

Process Pipeline developers use Process Modelling Framework to orchestrate the business pipelines within services, and also to design the artifacts that participate in the Pipelines, in order to complete their implementation.


The key features of PMF services are:

- Support for visual modelling of the pipelines.
- Support for registration of Process, Activity, and Transition Logic implementation, separated from the modelling itself.
- Published interface for the abstraction of task implementation.
- Reminder, escalation, and expiry of tasks.
- Process Monitoring Admin Tool to view the execution of process instances.



## **Process Pipeline Flow**

Figure 1-1 Process Pipeline flow

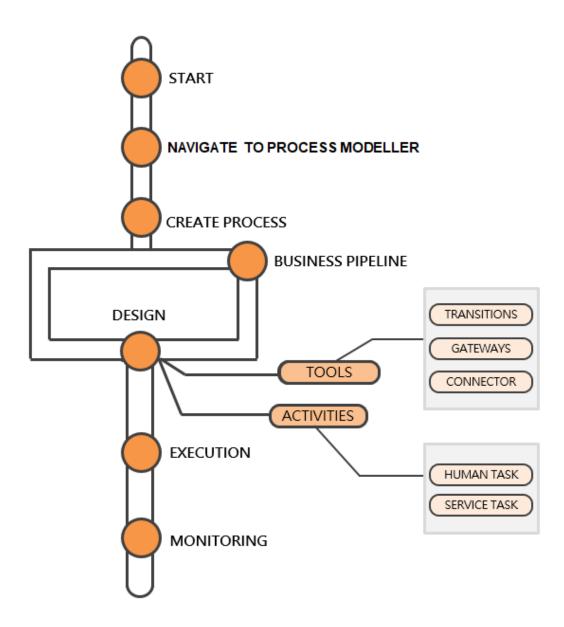

# PMF Service Components

PMF Service Components.

PMF services comprises of 2 main components

- Process Modeller helps to create and manage process pipelines.
- Process Monitor monitors the current stage of the process for different instances.



# **Accessing PMF Services**

Process Pipeline developers can utilize PMF Services to orchestrate the Business Pipelines, and also to design the artifacts that participate in the Pipelines, in order to complete their implementation.

To access the Process Modelling Framework:

- 1. From the OFS Cloud Applications window, click Navigation, to access the Navigation tree
- 2. Select one of the following from the Navigation Tree.
  - Transaction Monitoring Administration
  - Compliance Regulatory Reporting Administration
- 3. Select **Process Modelling Framework** from the menu to access the following options:
  - Process Modeller to view the summary of available processes and to create and manage process pipelines.
  - Process Monitor to monitor the currently running processes.

# **Using Process Modeller**

Process Modeller helps to create and manage Process Pipelines. You can also use the Process Modeling components on a canvas to create model pipelines.

In the **Process Modeller**, you can view the existing business process pipelines. You can also view the following details related to each pipeline:

- Process ID
- Process Name
- Process Description
- Version
- Instance
- Application
- Last Modified date

Perform the following tasks from the Process Modeller page:

- Create a process pipeline
- Edit a process pipeline
- Delete a process pipeline

## Note

Pipeline processes cannot be deleted for the records that are pre-configured in the service. Similarly, pipeline processes which have instances under them cannot be deleted.

- From the Options menu, you can
  - View the process flow in the canvas.
  - Copy an existing pipeline, to create a new pipeline with the same process flow.
  - Monitor the process flow of the pipeline.
  - Test or check whether the Business Pipeline you designed works as expected.

To access a particular pipeline, enter specific terms (keywords from Process ID, Process Name, or Process Description) in the **Search** field. You can sort the pipelines based on Process ID, Process Name, or Application.

To switch to Process Monitor, click Switch Window.

## Creating a Process Pipeline

You can create a process pipeline, from the Process Modelller.

To create a process pipeline:



- 1. Click Add to view the Process Details context window.
- 2. Enter the following details:
  - Process ID
  - Process Name
  - Process Description
- 3. Select the required **App Package ID** of the required service package.
- 4. Select the required process pipeline **Type**.

## Note

The **Registered Topics** and the **Spark DB** are provided for future enhancements and are not functional in this release.

- Enter any required Tags.
- Select the required workspace from the Service ID\_Workspace drop-down list.

Refer to the following table for Service Names and the associated Service IDs.

Table 2-1 Service Names and Service IDs

Se	rvice Name	Associated Service ID
•	Oracle Financial Services Crime and Compliant Management Transaction Cloud Service	Common Service_WS001
•	Oracle Financial Services Crime and Compliant Management Customer Screening Cloud Service Oracle Financial Services Crime and	
	Compliant Management Know Your Customer Cloud Service	
The state of the s		Oracle Financial Services CRR Cloud Service_WS001

Click Save And Close to save the process pipeline and close the context window.

You can also click **Save And Launch** to save the process pipeline and open the Process Flow window in the canvas.

Click **X** to cancel and return to the context window.

# Editing a Process Pipeline

You can edit an existing process pipeline, from the Process Modelller.


 To edit a Process Pipeline, click the required active link in a Process ID record to open the Process Flow window in the canvas.

## **About PMF Canvas**

The PMF Canvas is built on user-configured data fields and application rules that form the building blocks for the tools and activities in the process flow.

You can create process flows on the canvas. The drawing canvas is accessible when you edit an existing Process ID or when you save and launch a new process pipeline from the **Process Details context** window.

Figure 3-1 PMF Canvas

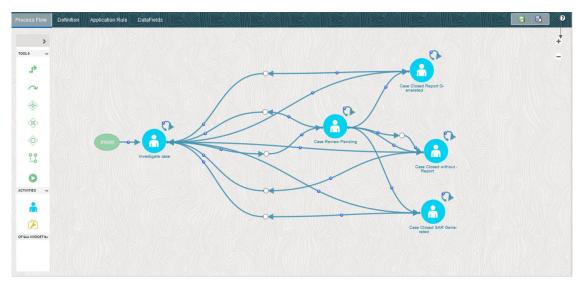

The PMF Canvas consists of the following tabs:


- <u>Process Flow</u> create Process Pipelines.
- Application Rule Set parameters
- <u>Data Fields</u> configure access and storage from external applications.

## **Process Flow**

The Process Flow tab present in the PMF canvas helps to create Process Pipelines. It has a dockable toolbar and a drawing canvas.



Figure 3-2 Drawing Canvas

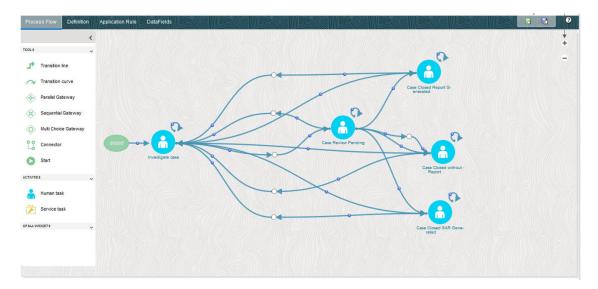

The drawing canvas helps to design the Process flow with the Tools and Activities available in the dockable toolbar. You can access the following features in the drawing canvas:

- **Transitions** controls the flow between various components in the Process flow. It connects two activities and the flow is configured based on a conditional expression or a decision rule.
  - To connect the activities using a straight line, use **Transition Lines** and to connect them using curved lines, use **Transition Curves**.
- Gateways assists to split an incoming transition is split into multiple transitions or merge
  multiple incoming transitions into a single transition. You can use the following gateways,
  based on the requirement.
  - Parallel Gateway- When multiple transitions or flows are executed in parallel.
  - Sequential Gateway When multiple transitions or flows are run in sequence.
  - Multi Choice Gateway When multiple transitions or flows are executed based on decision rules.

#### (i) Note

While using Parallel or Multi Choice gateways in your pipeline, ensure that after all the activities are added to these gateways, it is merged or closed again with a Parallel or Multi Choice gateway, respectively. If there is no other activity to be performed after the Parallel or Multi Choice gateway, it is mandatory to add an empty service task activity. Otherwise, the status will not be updated correctly and the next activity execution will not happen.

- **Connector** helps connect two activities with a different path (other than the default), in case the default path is overlapping with some existing flow.
- Start refers to the starting point in the Process Flow.
- **Human Task** requires human intervention to move to the next activity. For more information on stitching human tasks in your Process flow, see <u>Human Tasks</u>.



 Service Task - calls a service component (for example, activity to call a business rule to calculate a certain threshold). For more information on stitching service tasks in your Process flow, see Service Tasks.

## **Human Tasks**

Use a human task component, when an activity requires a human intervention to go to the next activity.

To add an human task:

## **Using Human Tasks**

- From the Process Flow tab, click Human Task from the Activities pane in the floating toolbar and click on the Drawing canvas, at the required position.
- Double click Human Task in the drawing canvas, to access the Activity Drawer window.
- 3. Enter the **Activity Name** and the **Description**.
  - An unique **Activity ID** is auto-generated for the newly added human task.
- 4. Select the activity Status.

## **Creating Tasks and Notifications Using Action Tab**

An Action or Task is used to inform the assigned user about an action to be completed in the current stage of the Workflow. You can add multiple tasks for an activity. You can assign a task to a user, user group, users with a particular role, or users selected by an application rule. The task is sent to the **Application Inbox** of the assigned users.

- 5. Click **Define Actions** to define new actions.
- 6. Click Add from the Action tab, to create a new task. You can add any of the following tasks:
  - Expiry
  - Escalation
  - E-mail
  - Reminders

## **Expiry**

You can set the expiry date for a specific task. The task will not be executed after the set expiry date. Select the required option from the **Expiry** drop-down list:

- Global Expiry Setting- To set the task expiry based on a global setting. The global setting can be set from the back end.
- Never Expire- If the task should not expire.
- Expire After- If you want to set the task expiry after some days and (or) hours. Enter the number of days and (or) hours after which the task should expire.
- Dynamic Value If you want the user assigned to this task to set the task expiry date and time dynamically. This value needs to be entered in the code.



## **Escalation**



#### Note

Escalation should be set after the expiry of the task. If you have selected the Never Expire option for Expiry, you cannot set escalation.

#### Enter/select the following details:

- Select the **Escalation** criteria:
  - Global Escalation Setting- To set the task escalation based on a global setting. The global setting can be set from the backend.
  - Never Escalate If an escalation is not required for the task.
  - Escalate After If you want to escalate when the task is not addressed after preconfigured days and (or) hours. Enter the number of days and (or) hours after which the escalation should be triggered.
  - Dynamic Value If you want the user assigned to this task to set the task expiry date and time dynamically. This value needs to be entered in the code.
- Maximum number of escalation levels Select 1 to escalate to the immediate manager, 2 to the next higher authority and so on.
- Escalation Path Default, People Hierarchy, and Custom Rule.
- Notification Message Type The type of notification message.

## E-mail

You can activate the email notification and also set the email template for sending emails after task completion.



#### Note

Ensure to configure the email settings before setting email notification for your tasks.

## Reminders

You can set a reminder to execute a task. The reminders will be sent to the assigned user as an open task to their Inbox. Enter/select the following details:

- **Recurrence**e The number of times set for a recurring reminder.
- Task Start Date Send a reminder after a defined number of days and (or) hours, from the start date of the task.
- Task Expiration Date Send a reminder before a defined number of days and (or) hours from the end date or expiry date of the task.
- Relative Date Number of days and (or) hours from the Relative Date after or before which you want to set the reminder.
- **Notification Message** The notification message to be sent as the reminder.



7. After entering the required criteria, click **OK** to create a new human task.

## **Using Service Tasks**

A Service Task is an automatic task that gets triggered in the Process flow.

Service tasks help to execute the business logic which is defined through an <u>Application Rule</u> of Execution Rule type. They are typically used to call External Model Service through REST APIs, External Java APIs, stored procedures, and functions.

To add a service task:

- 1. From the Process Flow tab, click **Service Task** from the **Activities** pane in the floating toolbar and click on the **Drawing canvas**, at the required position.
- 2. Double click Service Task in the drawing canvas, to access the Activity Drawer window.
- 3. Enter the Activity Name and the Description.
  - An unique **Activity ID** is auto-generated for the newly added human task.
- 4. Click **Task Implementation**, to access the **Implementation** tab.
- 5. Select the information domain where the Execution Rule you want to execute is available, from the Infodom drop-down list. The list displays all the Infodoms mapped to the services configured in your OFS Cloud services instance.
- **6.** Select the **Execution Rule** to be executed for this activity.
  - a. Click Open Details to view the Participant Details with all Application Rules of Execution Rule types available in your process.
  - b. Click an application rule to view the details.
  - c. Select the required rule and click **OK**.
- 7. Add the Parameters you want to pass to the Execution Rule using Data Fields. You can pass Static values or Dynamic Values. In the case of Dynamic, the value needs to be entered during the execution of the workflow.
  - a. Click Add under Parameters, to access the Binding Details.
  - b. Select the **Data Field** to which you want to pass the value. The list displays all Data Fields for the current process or package.
  - c. Select Static from the Parameter Type list to pass a static value to the selected data field in the Value field or Dynamic to pass the value during execution of the workflow.

## (i) Note

The added parameters are displayed under the **Parameters** pane. Click **Edit Parameter** corresponding to a parameter to edit it or click Delete, to delete the parameter.

- Select an application rule which you want to execute before executing the Execution Rule.
  Click Open Details corresponding to the Pre-Rule and select the required application rule.
- Select an application rule which you want to execute after executing the execution rule.
   Click Open Details corresponding to the Post-Rule and select the required application rule.



# Managing Design Pipelines

Business pipelines are defined in OFS Cloud services to design and execute the sequence of tasks, to derive a well-defined outcome.

Using the designer, you can design the entire business flows consisting of various types of tasks or another business pipeline.

## Designing a Pipeline

Business pipelines are defined in OFS Cloud services to design and execute the sequence of tasks which are either OFS Cloud services tasks or external tasks, to derive a well-defined outcome.

Business Pipeline is used to design a Business Process that consists of a sequence of tasks either internal or external tasks through well-defined interfaces. Using the designer, you can design the entire business flows consisting of various types of tasks or another business pipeline. This flow is defined by using various OFS Cloud services artifacts from the component toolbar and the execution can be defined to be in serial or parallel. Using the Process Modeller, we can Orchestrate a Business pipeline.

To create a Business Pipeline:

- Click Add Process Pipeline open the Process Details context window, in the Process Modeller window.
- 2. Enter a unique Process ID, Process Name, and the Description.
- 3. Select the appropriate App package in which you want to create the process. For more information, see the Application Package section.
- 4. Select Business Process Pipeline from the Type drop-down list.
- Select the information domain in which you want to create the Business Pipeline, from the Service ID\_Workspace drop-down list. The list displays all the workspaces mapped to the services configured in your OFS Cloud services instance.
- Click Save & Launch. The Process Flow canvas is displayed.
- Click Start Process and from the Tools pane in the floating toolbar and click on the drawing canvas where you want to place it. This Start activity indicates the beginning of the Process.
- 8. Design your Process with various components available in the Process Flow tab.

## Modifying a Pipeline

Modify a process pipeline.

You can modify the process flow, application rules and the data fields associated with a process pipeline.

- 1. From the Process Modeller window, search for the Pipeline (Business) and click the Pipeline name. The Process Flow tab is displayed.
- 2. Modify the process flow, definition, application rules, and data fields, as required and click **OK**.



## Testing a Process Pipeline

Verify and validate if the Process flow you designed works as expected.

To test the process flow:

- From the Process Modeller window, click Options and select Test Process Flow, to access the **Execute Workflow** window is displayed.
- Enter the required **Object ID** to identify the Process flow. This will be displayed as Entity ID in the Process Monitor window.
- (Optional). Enter the Application Parameters that are required in the Process flow you are testing. Specify parameters in JSON format.

```
Example: {"WF_RUNSK":"15","WF_MISDATE":"12/31/1999"}
```

Click OK.

## Viewing a Pipeline

View the workflow of an existing process pipeline.

To view the workflow:

- From the Process Modeller window, click Options and access the sub-menu.
- Click **View** to view the process flow of the pipeline.

## Copying a Pipeline

Copy an existing business process and create a new Business Process based on the copied process, by updating the Process flow or other required details.

To copy an existing business process:

- 1. From the Process Modeller window, click Options and access the sub-menu.
- Click **Copy** to copy the process flow of the pipeline.
- Enter a unique Process ID, Process Name, and Process Description. If you select the same App Package ID, then Data Fields and Application Rules also will be copied.
- Select the newly created **Process** and click the Process Name. Modify the Process flow and other details if required.

## Deleting a Pipeline

Delete a Business Pipeline.



## Note

Processes cannot be deleted for the records that are preconfigured in the service. Similarly, processes which have instances under them cannot be deleted.

To delete an existing business process:

From the Process Modeller window, click Delete Row corresponding to the Pipeline you want to delete.



- Click OK to confirm the deletion.
- 3. Click **Delete Anyway** to delete the Pipeline or click Cancel to cancel the delete operation

# **Application Rules**

The Application or API Rule is the interface between the process engine and the service, including any parameter to be passed.

Based on their usage the application riles are categorized into three types:

- Execution Rule: These are Business Logic executed as Task by an Activity.
- Decision Rule: This rule returns a Boolean value "True/False", used in decision making during split or branching of transition.
- Selection Rule: This rule fetches some value, useful to get value dynamically from a table
  or other source.

To create an application rule, click **Add** in the Application tab, to view the **Application Rules** menu. Currently, the available application rules are:

- Attribute Expression Application Rule
- Advanced Attribute Expression Application Rule

## (i) Note

The following Application Rules displayed in the menu are not yet functional and will be available in future releases:

- Stored Procedure Application Rule
- Function Application Rule
- JSON Read From DB Application Rule
- JSON Write To DB Application Rule

## **Attribute Expression Application Rule**

This Application Rule uses attribute expressions in your Process Flow. Enter the following details to create a new attribute expression application rule:

- Name Enter a unique name for the Application Rule.
- Rule Type Select the rule type as DecisionRule. This Rule Execution type supports only the DecisionRule type.
- Execution Type Select the Application Execution Type as Attribute Expression.
- Attribute Select the attribute for which you want to define the application rule, from the drop-down list. The list displays the attributes configured for the selected service and component. For more information, see <a href="Configuring Application Object Model">Configuring Application Object Model</a> (AOM). Click Add to add values to the selected attributes. A row is added in the Attribute Values pane. Click the <a href="Value">Value</a> column to select the values for the attribute from the drop-down. You can select one or more values. You can select multiple attributes and click Add to assign values to those attributes.

Click **Delete** to remove a row.



## Advanced Attribute Expression Application Rule

This is an advanced version of the Attribute Expression Application Rule with additional logical conditions and assignment operators. The expression can be dynamically built and will return True or False values after evaluation. This is used as a DecisionRule in transitions. You can define this application rule with multiple conditions and nested groups.

- Rule Name Enter a unique name for the Application Rule.
- AND or OR Select the logical operator to be used for the conditions in a group.
- Add Condition When you click Add Condition, a new row gets added. To define a
  condition, select the attribute, the operator, and the value from the drop-down lists. Multiple
  values can be selected for each attribute. Click Remove Condition to delete an already
  added condition.
  - Attribute- The drop-down list displays the attributes configured for the selected service and component. For more information, see <u>Configuring Application Object Model</u> (AOM).
  - Operator- Available options are in,=,<>,<,<=,>,>=.
  - Value- Displays the values configured for the selected attributes. Select the required value.
  - Attribute Select the attribute for which you want to define the application rule, from
    the drop-down list. The list displays the attributes configured for the selected service
    and component. For more information, see <u>Configuring Application Object Model</u>
    (AOM).

Click **Add** to add values to the selected attributes. A row is added in the Attribute Values pane. Click the **Value** column to select the values for the attribute from the drop-down. You can select one or more values. You can select multiple attributes and click Add to assign values to those attributes.

Click **Delete** to remove a row.

 Add Group - Click Add Group to include nested conditions. For each group, select the required logical operator as AND or OR.
 Click Remove Group to delete a group of conditions.

## Configuring Application Object Model (AOM)

This module helps in creating a set of attributes for a given service abstractly so that frameworks like PMF and other modules can leverage retrieving service attributes and their values. Each service is identified using a service package ID.

The attribute values are fetched based on the attribute types.

Table 3-1 Attribute Types and IDs

Attribute Type ID	Description
1001 (Static)	Store attribute values in the AAI_AOM_STATIC table as V_STATIC_ID and V_STATIC_VAL.
1002 (Query)	Enter the SQL query in V_ATTRIBUTE_VALUE1 in the AAI_AOM_APP_COMP_ATTR_MAPPING table, which has to be fired to fetch the attribute values.



Table 3-1 (Cont.) Attribute Types and IDs

Attribute Type ID	Description
1003 (JavaAPI)	Enter the method that is configured for V_ATTRIBUTE_VALUE1 for the required attribute. The configured method in the classpath is called to get the attribute values in this case.
1004 (Hierarchy)	Specify the Hierarchy code to be fetched in V_ATTRIBUTE_VALUE1 in the AAI_AOM_APP_COMP_ATTR_MAPPING table.
1005 (Multi Select Hierarchy)	Specify the Multi Select Hierarchy entries in the AAI_AOM_APP_COMP_ATTR_TL table.
103 (DATE)	This is used for configuring FIC_MIS_DATE. The V_ATTR_CONTROL_TYPE value should be 11.
102 (Text Box)	This is used for the Description field. The V_ATTR_CONTROL_TYPE value should be 7.

## (i) Note

Only Attribute Type Ids 1001 and 1002 are functional in this release. The other Attribute Types in the table are for future use.

## **Data Fields**

Data Field, which is also known as Process Variable, helps Process Pipelines to access and store information from external applications. Often the process flow is based on the value of this information. In other cases, this information is the result of running the tasks in the Pipeline

#### System Data Fields

Some data are tracked internally by the System using a predefined set of Data Fields such as Status of Process. You can access these activity instance attributes in the same way you access regular data objects, but you cannot assign new values to them.

## Adding a Data Field

- 1. From the Process Modeller window, click the required process name record link for which you want to add a Data Field. The Process Flow tab is displayed.
- 2. Select the **Data Fields** tab.
- Click Add. The Data Field Details window is displayed.
- Enter the following details:
  - Data field Code Enter the Variable Name or Code, which needs to be used by the service to read or write into this variable. This field is non-translatable.
  - **Data field Description** Enter a brief description of the Data field.
  - **Data field Type** Enter the Data Field type. The supported types are String, Integer, Float, and Boolean.
  - Initial Value Enter the default value for the Data.
  - **Scope** Select the scope of the Data Field from the drop-down list. The options are:



- Process: Select Process if you want to use the Data Field only in the current process.
- Package: Select Package if you want to use the Data Field across all the processes in the package.

## 5. Click OK.

## Note

Processes cannot be deleted for the records that are pre-configured in the service. Similarly, processes which have instances under them cannot be deleted.

# **About Process Monitor**

The Process Monitor is used to monitor the current stage of the Process for different instances.

After integration with an Application, the workflow can be called. After calling it goes through all the stages defined. Process Monitor shows all the stages finished, current stage, and stages to come if any. Your user group should be mapped to the function role WFMACC (Workflow Monitor Access) to access the Process Monitor window.

Enter specific terms (keywords from Process ID, Process Name, or Process Description) in the **Search** field to search for matching Pipelines. You can sort the Processes displayed in the Process Monitor window based on Entity Id, Entity Name, Process ID, or Process Name. Click **Switch Windows** to go to the <u>Process Modeller</u> window.

The records table consists of all the workflows which are called from the Application with details such as Entity Name, Entity ID, Process Name, Process Description, Execution Start Time, Last Execution Time, Last Updated By, and Status.

Click **Options** to perform the following actions:

- Click Re-Run to run the process again.
- Click Abort to stop a process that is running.
- Click Resume to restart a process run.

# Monitoring a Business Process

Monitor a business process using the process monitor window.

1. From the Process Monitor window, click the **Entity ID** link corresponding to the process you want to monitor.

In the Process Monitor window, the status of the activity is represented as given:

• Figure 4-1 Successful Run



- indicates that the execution of the activity is successful.
- Figure 4-2 Activity execution in progress



- indicates that the activity is currently running or waiting for the user's input to proceed.
- Figure 4-3 Activity execution failed





- indicates that the execution of the activity has failed.
- Figure 4-4 Activity execution pending



- indicates that the activity is yet to be executed.
- 2. Refresh the pane and click **View** to access the **Process Logs** pane.

The Process Logs pane lists all the execution stages of the process. Click the **Process Monitor** pane to close the Process Logs pane.

# **Viewing Activity Logs**

View logs of each activity from the Process Monitor window

- Double-click on the activity icon whose logs you want to view. The Activity Definition details are displayed.
- Click View Activity Logs, to see the activity logs.

All the execution stages of the selected activity if it is already executed, are displayed in the log. Otherwise, it will be blank.

# Calling a PMF Pipeline

Call a PMF pipeline to test the process flow or execute the process flow.

# **From Application UI**

You can call a PMF pipeline using the REST Service in an external application.

## **Example**

**REST Service** 

```
URL: <contextPath>/PMFService/startWorkflowProcess
Method: POST
Consumes("application/json")
Produces("text/plain")
Sample Input Params:
"{\"SummaryPayload\":{\"objectid\":\"123\",\"objecttype\"
:\"QTNR\",\"infodom\":\"OFSAAAIINFO\",\"segment\":\"OFSAAAIINFO\",\"userid\"
:\"AAAIUSER\",\"locale\":\"en_US\",\"securitymap\"
:{},\"applicationparams\"
:{\"testparam\":\"value1\",\"testparam2\":\"value2\"}}}";
```

## From Process Modeller Window

You can call a PMF pipeline using the Test Process Flow function from the Process Modeller window as shown in the following.

The Test Process Flow option is used to check whether the Process flow you designed works as expected.

To call a PMF pipeline:

- 1. From the Process Modeller window, click **Options** corresponding to the pipeline you want to test. The submenu is displayed.
- 2. Click **Test Process Flow**. The Execute Process Flow window is displayed.
- 3. Enter an **Object ID** to identify the Process flow. This will be displayed as Entity ID in the Process Monitor window.
- 4. Enter the **Application Parameters** which are required in the Process flow that you are testing. Specify parameters in JSON format. This is an optional field.

```
Example: {"WF_RUNSK":"15","WF_MISDATE":"12/31/1999"}
```

5. Click OK.

# Adding PMF Tasks in Scheduler Service

PMF is now integrated with Scheduler Services to enable scheduling of pipeline initiation.

By using PMF as a component in Scheduler Services, you can schedule/execute pipelines and monitor the execution.

To schedule a PMF task using Scheduler Services:

- Log in to your Cloud services and access Scheduler Services.
- Select Define Batch to view the list of existing batches.
- 3. In the Define Batch page, create a batch. For details, see Create Batch.
- 4. Select Define Task to create a task and provide the following PMF-specific details:
  - Component Select Process Modeler Framework, to assign this as a PMF specific task.
  - Under Task Parameters, select Process Name and the respective AOM Parameters.
     The parameters list varies based on the selected process.

See Define Tasks.

- 5. Click **Schedule Batch**, to access the list of batches.
- 6. Select the PMF batch for scheduling and click Schedule. See Schedule Batch
- Once the batch execution begins, click <u>Monitor Batch</u>, to check the progress.
- 8. Select the **Batch** and the **Run ID** to access the required task, and click **Start Monitor** to view the task execution progress in the **List View** and **Visualizations** tabs. See <u>Monitor Batch/Batch Group</u>.
- Click View Execution Logs corresponding to the PMF task, to view the execution log information.
- 10. Click Process Monitor Logs corresponding to the PMF task, to view the PMF Canvas.

# Frequently Asked Questions

Frequently asked queries.

#### What is Process Modeller?

Use a Process Modeller to view and edit existing workflows and create new workflows.

#### What is Process Monitor?

Use a Process Monitor to view the path (of the workflow) that a case has already traversed, its current status, and the next possible paths in that workflow. Since there can be several versions of each workflow that are being used by a CM at the same time, the Process monitor displays a workflow diagram of the version that the case is using.

#### Can I associate a workflow with multiple case types?

Yes, one workflow can be associated with any number of case types. However, one case type can be associated with only one workflow.

#### Can I edit default workflows?

Since default workflows will be overwritten during an upgrade, we do not recommend using default workflows in production. If a workflow is overwritten during an upgrade, it may impact all the inflight and closed cases using that workflow. You can copy default workflows or create a new version of the workflow.

## If I modify a workflow, what impact does that have on cases already using the workflow?

PMF provides the ability to modify a workflow and either save the changes directly on that workflow or create a new version of the workflow. This is achieved using the following buttons on the PMF Process Modeller Canvas (page on which you draw the workflow):

- Save overwrites the workflow being edited. As a result, all cases (in-flight and closed)
  using that workflow will follow the modified workflow as soon as the changes are saved in
  PMF. New cases (of the Case Type(s) using this workflow) will also use this modified
  workflow.
- Save as New Version saves the modifications as a new version of the workflow. When this happens the version number assigned to this new version = parent workflow's version number + 1. For example: If the parent workflow had a version number 4, this new workflow will have a version number 5. But just saving a new version of a workflow does not have any impact on any case unless this new version is mapped to a Case Type in Case Designer.

#### **Example**

- Jan 1, a user creates a new AML workflow and maps it to Case Type = AML. Then, Process ID = 1, Process Name = AML, Version = 0, mapped to Case Type = AML
- 2. Jan 2, cases with type = AML start coming in and use the AML workflow Version 0.
- 3. Jan 5, the user creates a version of this AML workflow. Hence, Process ID = 2, Process Name = AML, Version = 1



- 4. The user creates this new version on Jan 5 but does not update the Case Type Workflow mapping. So in Case Designer Case Type = AML is still mapped to Workflow = AML Version 0.
- 5. Jan 6 new cases with type = AML come in and are still going to use the AML workflow Version 0. Old cases (Jan 2 6) are also going to continue using AML workflow Version 0. If the user had modified the Case Type Workflow mapping to map to the AML workflow Version 1, new cases arriving on Jan 6 would have used the AML workflow Version 1.
- 6. Jan 7, the user creates another version of this AML workflow and this time also changes the Case Type-workflow mapping to use this latest version. Hence, Process ID = 3, Process Name = AML, Version = 2, mapped to Case Type = AML.
- 7. Jan 7 (after the change in step 6), new cases with type = AML come in and are now going to use the AML workflow Version 2. Old cases (Jan 2 Jan 7 before the change in Case Designer) are going to continue using the AML workflow Version 0.

If I create a new version of a workflow in PMF and want to have someone review it before it goes into production, how do the reviewers ensure that the new version is not active until they want it to be?

If this workflow is linked to a Case Type in Case Designer, and the user saves the modifications using the Save feature, changes are reflected immediately in production. If the user saves the modifications using the Save as a New Version feature, they have to associate it with the case type for it to be enabled.

## Can I copy workflows?

Yes, workflows can be copied in Process Modeller. Copying a workflow copies the workflow design (states and transitions diagram) but none of the metadata associated with the workflow is copied. Therefore, after copying a workflow, clients will have to fill in several details to make the workflow functional.

# Can I deactivate a workflow in PMF? What impact does that have on cases already using the workflow?

Yes, workflows can be copied in Process Modeller. Copying a workflow copies the workflow design (states and transitions diagram) but none of the metadata associated with the workflow is copied. Therefore, after copying a workflow, clients will have to fill in several details to make the workflow functional.

# Can I delete a workflow in PMF? What impact does that have on cases already using the workflow?

Yes, you can delete any version of a workflow through Process Modeller but we recommend that users set an end date instead so that the workflow remains available for future use. If the workflow is being used by one or more case types, clients should be advised to update the Case Type definition (Case Management UI) to use a different workflow before deleting a workflow. If a case type is associated with a deleted workflow, the service will receive an error message when it tries to call this workflow.

## How is the case assignment done?

PMF does not perform a case assignment.

# Can PMF update the status of a case automatically when the Due Date on a case passes?

No, at this time, PMF requires all status changes to be manually completed. This functionality may be provided in the future.

