

Oracle®

Oracle Financial Services Model Management and Governance Installation and Configuration Guide



Release 26.1.0

G54239-02

April 2026

ORACLE®

Oracle Oracle Financial Services Model Management and Governance Installation and Configuration Guide, Release 26.1.0

G54239-02

Copyright © 2014, 2026, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1	Preface	
	Audience	1
	Additional Resources	1
	Conventions	2
	Abbreviations	2
2	Introduction	
	Components of Oracle Financial Services Model Management and Governance	1
	Installation Check List	2
3	Hardware and Software Requirements	
	License Information	1
4	Preinstallation	
	Oracle Database Instance Settings	1
	Create the Database Schema on Oracle Database	1
	Creating an Oracle User	1
	Creating the Application Configuration Schema	2
	Create the MMG Studio Schema	3
	Create MMG Graph Schema	3
	Create the DTP Schema	4
	Create the Installation, Download, and Metadata Repository Directories	5
	Configure the OS File System Settings and Environment Settings in the .profile File	6
	Configure Operating System and File System Settings	6
	Configure the Environment Settings	7
	Java Settings	8
	Oracle Database Server and Client Settings	8
	TNS entries in the tnsnames.ora file for Non-TCPS	8
	Time Zone Settings	9
	Prerequisites for the Data Pipeline	10
	Setup Password Stores with Oracle Wallet	11

Setup the Password Stores for Database User Accounts	11
Import Server Certificate to Java Keystore	13
Verify the Connectivity of the Wallet	13

5 Installation

Prerequisites	1
Download the OFS MMG Installer Kit	2
Extract the Software	2
Configure the config.sh file	3
Run the MMG Installer	39
Modify the Logging Level	41
Starting MMG Services	43
Stopping MMG Services	44
Generate GRAPH-KEYSTORE.P12	45
Installing Conda	45
Installing Python Library	46
Prerequisites	46
Procedure	47
Setting up the Environment for Hive Data Sourcing	49
Remote MMG Studio Configuration	50
PGX Installation	51
Configure the config.sh File of PGX	52
Starting PGX Server	54
Stopping PGX Server	54
R Interpreter	54
Installing Oracle R Distribution	54
R 4.1.2 Installation	55
MMG Connection Objects Library Setup	55
Installing ROracle Library	55
Installing RODBC Library	56
Installing the IRkernel	57
Configuring R Interpreter	58
Using MMG Studio to Oracle Connection Objects	58
Workspaces	58
Connections	59
Multi Level Approval	59
Kafka Installation	60
Configuring Interpreters	63
Spark Interpreter	63
Spark Configuration and Execution in Python	63
Set the Hadoop Clusters	63

Configuration on the OFS MMG Instance Server	63
Set Apache Spark in the OFS MMG Installed Server	64
Code Snippet to Create the Spark Dataframe and Trigger Executions in to Spark Cluster (with PySpark)	64
Interpreter Configuration	67

6 Post-installation Steps

Access the Application	1
Create Application Users	1
Map Application User(s) to User Group	1
User Access and Permissioning Management	3
Mapping User Groups	4
User Groups	5
User Group - Role Mapping	6
Functions and Roles required to perform CRUD operations for Conda	7
Access MMG using AAI Realm	8
Prerequisites	8
Access MMG using SAML Realm	10
Access the Application by Using SAML Realm	11
Access Data Studio Using SAML Realm	12
Model Techniques/ Model Library	14
.PEM file creation for Model Service	14
AAI User Provisioning SQL Scripts Generator Utility	14
IDCS Server Configuration	15
Conda Environment Migration and Restoration	18
Manual Configuration of Email Notification for Scheduler Batch Execution	20
Fine Tuning Studio Sessions	21

7 Upgrade Installation

Upgrading to 26.1.0	1
---------------------	---

8 Update Utility to Reconfigure Installation Parameters

9 Cloning the MMG Instance

Copying the Directories	1
Copying the Database Schemas	1
Configuring Password Store with Oracle Wallet	1
Updating the Host Details	2
Update LOG_HOME and FTPSHARE	2

Setting up the SSL Keystore	3
Updating Wallet Aliases for Oracle Schemas	3
Updating Context and Ports	3
Starting MMG Services	4
Cloning the Environment	4

10 Frequently Asked Questions (FAQs) and Error Dictionary

Frequently Asked Questions	1
Frequently Asked Questions	1
Application Pack 8.1.3.1.0 FAQs	14
Configuration Property Names	14

11 Appendix I - List of Supported Timezones

1

Preface

This section provides information about the Oracle Financial Services Model Management and Governance (OFS MMG) Installation and Configuration Guide.

Topics:

Related Topics

- [Audience](#)
- [Additional Resources](#)
- [Conventions](#)
- [Abbreviations](#)

Audience

OFS MMG Installation and Configuration Guide is intended for Administrators and Implementation Consultants who handle installing and maintaining the Application Pack Components.

This document assumes that you have experience in installing Enterprise Components and basic knowledge about the following:

- OFS AAI Components
- OFSAA Architecture
- UNIX Commands
- Database Concepts
- Web Server or Web Application Server

Additional Resources

This section identifies additional resources to the OFS MMG Application. You can access the following documents from the [Oracle Help Center](#):

- [OFS Model Management and Governance Release Notes](#)
- [OFS Model Management and Governance User Guide](#)

Additional related documents are as follows:

- [OFS Analytical Applications 8.1.2.0.0 Technology Matrix](#)

Note

In the Tech Matrix, the Java Version column is no longer applicable for release 26.1.0. Instead, Java "17" 2021-09-14 LTS is applicable.

Conventions

The following text conventions are used in this document:

Table 1-1 Document Conventions

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action or terms defined in text or the glossary.
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, file names, text that appears on the screen, or text that you enter.
Hyperlink	Hyperlink type indicates the links to external websites, internal document links to sections.

Abbreviations

The following table lists the Abbreviations used in this document:

Table 1-2 Abbreviations

Abbreviation	Meaning
BDP	Big Data Processing
DBA	Database Administrator
DDL	Data Definition Language
DEFQ	Data Entry Forms and Queries
DML	Data Manipulation Language
EAR	Enterprise Archive
EJB	Enterprise JavaBean
ERM	Enterprise Resource Management
FTP	File Transfer Protocol
HDFS	Hadoop Distributed File System
HTTPS	Hypertext Transfer Protocol Secure
J2C	J2EE Connector
J2EE	Java 2 Enterprise Edition
JCE	Java Cryptography Extension
JDBC	Java Database Connectivity
JDK	Java Development Kit
JNDI	Java Naming and Directory Interface
JRE	Java Runtime Environment
JVM	Java Virtual Machine
LDAP	Lightweight Directory Access Protocol
LHS	Left Hand Side
MFA	Multi-Factor Authentication

Table 1-2 (Cont.) Abbreviations

Abbreviation	Meaning
MOS	My Oracle Support
OFSAA	Oracle Financial Services Analytical Applications
OFS AAI	Oracle Financial Services Analytical Application Infrastructure
OFS MMG	Oracle Financial Services Model Management and Governance Application
OHC	Oracle Help Center
OLAP	On-Line Analytical Processing
OLH	Oracle Loader for Hadoop
ORAAH	Oracle R Advanced Analytics for Hadoop
OS	Operating System
RAM	Random Access Memory
RDBMS	Relational Database Management System
RHEL	Red Hat Enterprise Linux
SFTP	Secure File Transfer Protocol
SID	System Identifier
SSL	Secure Sockets Layer
TNS	Transparent Network Substrate
URL	Uniform Resource Locator
VM	Virtual Machine
WAR	Web Archive
XML	Extensible Markup Language
PGX	Parallel Graph AnalytiX
FQDN	Fully Qualified Domain Name

2

Introduction

Financial Institutions require models that work on traditional statistical techniques, modern machine-learning methods, computational and simulation models. Oracle Financial Services Model Management and Governance leverage the Data Studio environment to develop, deploy, and manage models at the enterprise level.

The OFS Model Management and Governance Application enables institutions to implement their IT policies while providing flexibility and freedom that Data Scientists and Statistical Modelers desire. OFS MMG's design facilitates financial institutions to manage external regulatory and internal governance policies by building testing models in a workspace environment. A workspace is provisioned and authorized for use (usually by an Administrator) before making it available to modelers. Administrative users grant analysts and modelers access to workspaces along with a subset of production data to build models. Validated and approved models can then be promoted from workspaces to the enterprise model repository. Models in the repository can then be woven into analytical application flows crafted by mixing data management tasks, model execution, and deterministic business logic.

Topics:

Related Topics

- [Components of Oracle Financial Services Model Management and Governance](#)
- [Installation Check List](#)

Components of Oracle Financial Services Model Management and Governance

The following are the components of Oracle Financial Services Model Management and Governance Application:

- Data Management
- Modeling
 - Datasets
 - Model Libraries
 - Model Techniques
 - Model Catalog
 - Pipelines
 - Graphs
- Orchestration
 - Scheduler Dashboard
 - Define Batch
 - Define Tasks
 - Schedule Batch

- Monitor Batch
- Scheduler Configuration
- Object Migration
 - Export Objects
 - Import Objects
- DTP Administration
 - Focus Type
 - Event Type
- Data Maintenance
 - Data View
 - Form Builder
- DTP Configuration
 - Designer
 - Threshold Manager
 - Jobs
 - Audit
- Model Actions
- Audit Trail
- File Manager
- Health
- Data Stores
- Conda Environments
- API Registry
- Kafka Topics
- OFSAA Environment
- Data Studio Options
 - Interpreters
 - Tasks
 - Permissions
 - Templates
- Identity Management

For more information on how to use the application, see the [OFS Model Management and Governance User Guide](#).

Installation Check List

To complete the installation process, you must perform the following steps listed in the Pre-install Checklist. Use this checklist to verify whether these steps are completed or not.

Table 2-1 Installation Checklist

Sl. No.	Activity
Pre-installation Steps	
1	Install all the prerequisite <i>hardware and software</i> as per the OFS Analytical Applications Technology Matrix .
2	Configure the Database Instance Settings.
	<div style="border: 1px solid #ccc; border-radius: 10px; padding: 10px; margin: 10px 0;"> <p>Note</p> <p>In the Tech Matrix, the Java Version column is no longer applicable for release 8.1.3.3.0 and incremental versions. Instead, Java 21.x is applicable.</p> </div>
3	<p>Create the Installation, Download, and Metadata Repository Directories:</p> <ul style="list-style-type: none"> • Installation Directory • Temporary Directory • Staging Area/Metadata Repository • Download Directory
4	<p>Configure the following Operating System and File System Settings:</p> <ul style="list-style-type: none"> • File Descriptor • Total number of processes • Port(s) • .profile file permissions • Add FTP or SFTP Configuration for file transfer (to access Staging Area and Metadata Directory)
5	<p>Update the following Environment Settings as required for the installation in the .profile file:</p> <ul style="list-style-type: none"> • Java Settings <ul style="list-style-type: none"> – Oracle Database Server and Client Settings – Add TNS entries in the TNSNAMES.ORA file – Time Zone Settings
Installation Steps	
6	Download the Installer Kit.
7	Extract the Installer Kit.
8	Configure the config.sh file.
9	Trigger the Application Installation.
Post-Installation Steps	
10	Access the MMG Application.
11	Create Application Users.
12	Map Application User(s) to User Groups.

Note

MMG v8.1.3.3.0 and incremental versions supports Python 3.8.x, Python 3.9.x, Python 3.10.x, Python 3.11.x, and Python 3.12.x. Apache Flink packages are not supported with Python 3.12.x.

3

Hardware and Software Requirements

The following are the hardware and software requirements:

Table 3-1 Hardware and Software Requirements

Category	Version
Processor Type	Linux x86-64
OS Version	Oracle Linux Server release 8.4 and later versions OEL9, OEL8 and Solaris
Java Version	Java 21.x
Database Server	Oracle Database 19c (19.3+) and 23 Enterprise Ed.
Python	Version 3.10.x to 3.12.x

License Information

For details on the third-party software tools used, see the [OFSAA Licensing Information User Manual Release 8.1.2.0.0](#).

Note

Beginning with release 8.1.3.1.0, the Java Version column in the Tech Matrix is no longer applicable. Java 17.x is now the only supported version for this release.

4

Preinstallation

This section lists all the prerequisites to install OFS MMG.

Oracle Database Instance Settings

Ensure that the following database instance settings are configured:

- NLS_CHARACTERSET to AL32UTF8
- NLS_LENGTH_SEMANTICS to BYTE
- OPEN_CURSORS limit to greater than 1000

Create the Database Schema on Oracle Database

Create the following Database Schemas:

- [MMG Studio Schema](#)
- [MMG Graph Schema](#)
- [DTP Schema](#)

Tablespace

You can either use the existing tablespace or you can create a new tablespace during the schema creation by using the following script:

Permanent Tablespace

```
CREATE TABLESPACE <tablespace_name >  
DATAFILE '<tablespace_name >.dat'  
SIZE 1G  
ONLINE;
```

Temporary Tablespace

```
CREATE TEMPORARY TABLESPACE <tablespace_name >  
TEMPFILE '<tablespace_name >.dbf'  
SIZE 100M;
```

Creating an Oracle User

You can create an Oracle user by using the following script:

```
CREATE USER <oracle_user_name> IDENTIFIED BY <password> DEFAULT TABLESPACE USERS  
TEMPORARY TABLESPACE TEMP QUOTA <quota_size>|UNLIMITED ON USERS
```

Creating the Application Configuration Schema

Create the application schema. You must create an Oracle User to create the application schema. For more details, see [Creating an Oracle User](#) section. This section discusses the various grants required for the Oracle Database User.

Assign the Grants

Assign the following grants to the workspace schema user.

```
grant create SESSION to <oracle_database_user>;
grant create PROCEDURE to <oracle_database_user>;
grant create SEQUENCE to <oracle_database_user>;
grant create TABLE to <oracle_database_user>;
grant create TRIGGER to <oracle_database_user>;
grant create VIEW to <oracle_database_user>;
grant create MATERIALIZED VIEW to <oracle_database_user>;
grant select on SYS.V_$PARAMETER to <oracle_database_user>;
grant create SYNONYM to <oracle_database_user>;
grant select on sys.v_$parameter to <oracle_database_user>;
grant select on sys.dba_free_space to <oracle_database_user>;
grant select on sys.dba_tables to <oracle_database_user>;
grant select on sys.Dba_tab_columns to <oracle_database_user>;
grant create RULE to <oracle_database_user>;
grant create any trigger to <oracle_database_user>;
grant drop any trigger to <oracle_database_user>;
grant select on SYS.DBA_RECYCLEBIN to <oracle_database_user>;
create or replace DIRECTORY fs_list_logs_dir AS '/file_store/fs_list/logs/';
grant read, write on DIRECTORY fs_list_logs_dir TO schema_name;
create or replace DIRECTORY fs_list_script_dir AS '/file_store/fs_list/script/';
grant read, execute on DIRECTORY fs_list_script_dir TO schema_name;
create or replace DIRECTORY fs_list_control_dir AS '/file_store/fs_list/control/';
grant read on DIRECTORY fs_list_control_dir TO schema_name;

-- Directory creation and access grants
create or replace DIRECTORY fs_list_logs_dir AS '/file_store/fs_list/logs/';
grant read, write on DIRECTORY fs_list_logs_dir to &schemaname;

create or replace DIRECTORY fs_list_script_dir AS '/file_store/fs_list/
```

```
script/';
grant read, execute on DIRECTORY fs_list_script_dir to &schemaname;

create or replace DIRECTORY fs_list_control_dir AS '/file_store/fs_list/
control/';
grant read on DIRECTORY fs_list_control_dir to &schemaname;
```

Create the MMG Studio Schema

You must create an oracle user to create the MMG Studio Schema. For more details, see the [Creating an Oracle User](#) section.

Assign the following grants:

```
GRANT CONNECT, CREATE TABLE, CREATE VIEW, CREATE SEQUENCE TO
<mmgstudio_schema_name>;
```

A new user group created in OFS MMG requires permissions for studio operations must be added in the following files:

- mmgstudio/conf/application.yml
- mmgstudio/conf/ofsa-permissions.init.yml

Note

Ensure that the groups are in upper case, as OFS AAI groups are always in an upper case format.

Create MMG Graph Schema

Ensure that you create an oracle user before creating the MMG Graph Schema. For more details, see the [Creating an Oracle User](#) section.

Assign Grants

This section discusses the various grants required for the graph schemas.

Assign the following grants for the schema:

1. Pre-installation grants for the graph schema:

```
{{grant create SESSION to <oracle_database_user>;}}
{{grant create PROCEDURE to <oracle_database_user>;}}
{{grant create SEQUENCE to <oracle_database_user>;}}
{{grant create TABLE to <oracle_database_user>;}}
{{grant create TRIGGER to <oracle_database_user>;}}
{{grant create VIEW to <oracle_database_user>;}}
{{grant create MATERIALIZED VIEW to <oracle_database_user>;}}
{{grant select on SYS.V_$PARAMETER to <oracle_database_user>;}}
{{grant create SYNONYM to <oracle_database_user>;}}
```

```

{{grant select on sys.v_$parameter to <oracle_database_user>;}}
{{grant select on sys.dba_free_space to <oracle_database_user>;}}
{{grant select on sys.dba_tables to <oracle_database_user>;}}
{{grant select on sys.Dba_tab_columns to <oracle_database_user>;}}
{{grant create RULE to <oracle_database_user>;}}
{{grant create any trigger to <oracle_database_user>;}}
{{grant drop any trigger to <oracle_database_user>;}}
{{grant select on SYS.DBA_RECYCLEBIN to <oracle_database_user>;}}
GRANT CREATE SESSION TO <GRAPH_SCHEMA>;
GRANT CREATE TABLE TO <GRAPH_SCHEMA>;
GRANT CREATE VIEW TO <GRAPH_SCHEMA>;
GRANT CREATE ANY PROCEDURE TO <GRAPH_SCHEMA>;
GRANT CREATE SEQUENCE TO <GRAPH_SCHEMA>;
GRANT CREATE JOB TO <GRAPH_SCHEMA>;
GRANT CREATE MATERIALIZED VIEW TO <GRAPH_SCHEMA>;
GRANT EXECUTE ON DBMS_SCHEDULER to <GRAPH_SCHEMA>;
GRANT EXECUTE ON DBMS_COMPARISON TO <GRAPH_SCHEMA>;
GRANT EXECUTE ON DBMS_RLS TO <GRAPH_SCHEMA>;
GRANT EXECUTE ON SYS.DBMS_SESSION TO <GRAPH_SCHEMA>;
GRANT EXECUTE ON DBMS_REDEFINITION TO <GRAPH_SCHEMA>;
GRANT REDEFINE ANY TABLE TO <GRAPH_SCHEMA>;
GRANT SELECT ON SYS.V_$PARAMETER TO <GRAPH_SCHEMA>;
GRANT SELECT ON <DATA_SOURCE_SCHEMA>.<TABLE_NAME> TO <GRAPH_SCHEMA>;

```

Example:

Change the <DATA_SOURCE_SCHEMA> for the schema that is used in the graph pipeline.

Note

If a user has to execute the custom graph, the same permissions have to be provided for the input tables that are referred to in the custom graph pipeline.

Create the DTP Schema

It is mandatory to create the DTP Schema in order to use the DTP pipeline administration.

Assign the following grants to create the DTP schema:

```
CREATE USER <DTP_SCHEMA> IDENTIFIED BY <PASSWORD>;
```

```
GRANT CONNECT TO <DTP_SCHEMA>;  
  
GRANT RESOURCE TO <DTP_SCHEMA>;  
  
GRANT CREATE MATERIALIZED VIEW TO <DTP_SCHEMA>;  
  
GRANT CREATE PROCEDURE TO <DTP_SCHEMA>;  
  
GRANT CREATE SEQUENCE TO <DTP_SCHEMA>;  
  
GRANT CREATE SESSION TO <DTP_SCHEMA>;  
  
GRANT CREATE SYNONYM TO <DTP_SCHEMA>;  
  
GRANT CREATE TABLE TO <DTP_SCHEMA>;  
  
GRANT CREATE TRIGGER TO <DTP_SCHEMA>;  
  
GRANT CREATE VIEW TO <DTP_SCHEMA>;  
  
GRANT UNLIMITED TABLESPACE TO <DTP_SCHEMA>;  
  
GRANT EXECUTE ON SYS.DBMS_CRYPTO TO <DTP_SCHEMA>;  
  
GRANT EXECUTE ON SYS.DBMS_JAVA TO <DTP_SCHEMA>;  
  
GRANT EXECUTE ON SYS.DBMS_UTILITY TO <DTP_SCHEMA>;
```

Create the Installation, Download, and Metadata Repository Directories

To install the application, create the following directories:

- **OFS MMG Download Directory (Optional):** This is the directory where the downloaded installer or patches can be copied. Create a download directory and copy the OFS MMG Application Pack Installer File (archive). Assign 755 permission to this directory.
- **Temporary Directory:** This is the default temporary directory where the installation files are stored for a short time to support faster installation. Configure adequate space on the `/tmp` directory. It is recommended to allocate more than 10 GB of space. Assign 755 permission to this directory and disable the `NOEXEC` option.

Note

If the `NOEXEC` option is enabled, the extraction of files by the installer into the `/tmp` directory is prevented and the binaries will not execute in the directory, hence resulting in failure of the installation.

- **OFS MMG Installation Directory (Mandatory):** Create an installation directory where the product binaries are installed. Assign 755-user permission to the Installation Directory.
- **OFS MMG Staging/Metadata Directory (Mandatory):** This is a directory to hold the application metadata artifacts and additionally, act as the staging area for the flat files. This directory is also referred to as `FTP SHARE`. Create a Staging or Metadata Repository Directory to copy data files, save data extracts, and so on. You can configure this directory on a different mount or under a different user profile.

Note

Ensure that the OFS MMG Staging Directory is not set to the same path as the OFS MMG Installation Directory and is not a sub-directory inside the OFS MMG Installation Directory.

Configure the OS File System Settings and Environment Settings in the .profile File

A `.profile` file is a start-up file of a UNIX User. Create the `.profile` file at the home directory of the logged-in user if it is not already available. The user must have 755 permission on the file to execute it. This file consists of various parameters for Environment Settings, OS, and File System Settings.

To set the parameters for the `.profile` file, login as a non-root user, and configure the environment settings.

Warning

Do not modify any other parameters other than the parameters mentioned in the following subsections.

Configure Operating System and File System Settings

To install the application, configure the operating system and file system settings. Refer to the following parameters and configuration actions as tabulated.

Table 4-1 Configure operating system and file system settings

Parameter	Configuration Action
File Descriptor Settings	<p>In the <code>sysctl.conf</code> file, if you want to change the number of file descriptors, perform the following action as a root user:</p> <ol style="list-style-type: none"> 1. Edit the following line in the <code>/etc/sysctl.conf</code> file: <pre>fs.file-max = <value></pre> where <code><value></code> is greater than 15000 <ul style="list-style-type: none"> • Apply the change by running the following command: <pre># /sbin/ sysctl -p</pre>

Note

The value specified here is the minimum value to be set for the installation process to go forward. For other modules, this value may depend on the available resources and the number of processes executed in parallel.

Total Number of Process Settings

In the `sysctl.conf` file, set the value to greater than 4096.

Note

The value specified here is the minimum value to be set for the installation process to go forward. For other modules, this value may depend on the available resources and the number of processes executed in parallel.

Configure the Environment Settings

Environment settings refers to values related to the current environment, like the operating system or user sessions. To configure the environment settings refer to the following topics:

- [Java Settings](#)

- [Oracle Database Server and Client Settings](#)
- [TNS entries in the tnsnames.ora file for Non-TCPS](#)
- [Time Zone Settings](#)

Java Settings

To configure the Java Settings, refer the following table:

Note

In the application, Java 21 is supported.

Table 4-2 Java Settings

Description	Example Value
In the .profile file, set JAVA_BIN to include the JDK absolute path.	For example: JAVA 21

Table 4-3 Java Settings

Description	Example Value
In the .profile file, set the Java tool options for all versions JDK-17 and above updates. Ensure that SYMBOLIC links to JAVA installation are not set in the PATH variable.	JAVA_TOOL_OPTIONS=" - Djdk.util.zip.disableZip64ExtraFieldVal idation=true" export JAVA_TOOL_OPTIONS
In the .profile file, set JAVA_BIN to include the JDK absolute path.	For example: JAVA_BIN =/usr/java/ jdk-17/bin export JAVA_BIN

Oracle Database Server and Client Settings

To configure the Oracle Database Server and Client Settings, refer to the following table:

Table 4-4 Oracle Database Server and Client Settings

Description	Example Value
In the .profile file, set TNS_ADMIN pointing to the appropriate tnsnames.ora file.	TNS_ADMIN=\$HOME/tns
In the .profile file, set ORACLE_HOME pointing to the appropriate Oracle Client installation.	ORACLE_HOME=/scratch/oraofss/ app_client19c/product/ 19.0.0/client_1
In the .profile file, set PATH to include the appropriate \$ORACLE_HOME/bin path.	PATH=\$JAVA_HOME/bin:\$ORACLE_HOME/bin

TNS entries in the tnsnames.ora file for Non-TCPS

You must configure the TNS entries in the tnsnames.ora file for Non-TCPS.

Non-TCPS

To configure the TNS entries in the `tnsnames.ora` file for Non-TCPS, refer to the following table:

Table 4-5 TNS entries in the TNSNAMES.ORA file for Non-TCPS

Description	Example Value
Ensure that an entry (with SID or SERVICE NAME) is added in the <code>tnsnames.ora</code> file on the OFSAA server.	<pre><SID_NAME> = DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = TCP)(HOST = <HOST_NAME>.in.oracle.com)(PORT = 1521)))(CONNECT_DATA = (SERVICE_NAME = <SID_NAME>))<ATOMIC_SCHEMA_NAME> = (DESCRIPTION = (ADDRESS_LIST = (ADDRESS = (PROTOCOL = TCP)(HOST = <HOST_NAME>.in.oracle.com)(PORT = 1521)))(CONNECT_DATA = (SERVICE_NAME = <SID_NAME>)))</pre>

```
<SID NAME> =
(DESCRIPTION =
(ADDRESS_LIST =
(ADDRESS = (PROTOCOL = TCP)(HOST = <HOST NAME>)(PORT = <PORT NUMBER>))
) (CONNECT_DATA =
(SERVICE_NAME = <SID NAME>)
)
)
<ATOMICSCHEMANAME> =
(DESCRIPTION =
(ADDRESS_LIST =
(ADDRESS = (PROTOCOL = TCP)(HOST = <HOST NAME>)(PORT = <PORT NUMBER>))
)
(CONNECT_DATA =
(SERVICE_NAME = <SID NAME>)
)
)
```

Time Zone Settings

In the `.profile` file, set the Time Zone Parameter to indicate the time zone of your region or location.

Table 4-6 Time Zone Settings

Description	Example Value
Time Zone	TZ=Asia/Calcutta

Prerequisites for the Data Pipeline

The following prerequisites for the data pipeline must be executed before triggering the OFS MMG installer.

1. Log in as a DB user(ex: fccmdb) in your DB server (For example: 1759).
2. Create one directory with a preferred reference name (For example: datapipline) at the preferred location.
3. Now execute the following commands in the putty session of the DB server:
 - `mkdir -p ##location of dir created in step 2##/file_store/fs_list/logs # A directory by the external table to write the logs.`
 - `mkdir -p ##location of dir created in step 2##/file_store/fs_list/script # A directory to hold a pre-processor script used to list the files in a directory. This needs Read-Execute permissions.`
 - `mkdir -p ##location of dir created in step 2##/file_store/fs_list/control # A directory to hold files to control which directories can be listed. This needs Read permissions.`
 - `mkdir -p ##location of dir created in step 2##/file_store/fs_list/fccm-data # A directory to store the csv files.`
4. Log in to the DB server(For example: 1759) as a sysadmin(For example: sys), and then in sqldeveloper or any preferred application execute the following commands:
 - `CREATE OR REPLACE DIRECTORY fs_list_logs_dir AS '##<location of dir created in step 2>##/file_store/fs_list/logs';`
 - `GRANT READ, WRITE ON DIRECTORY fs_list_logs_dir TO ##MMG Application Schema##;`
 - `CREATE OR REPLACE DIRECTORY fs_list_script_dir AS '##<location of dir created in step 2>##/file_store/fs_list/script';`
 - `GRANT READ, EXECUTE ON DIRECTORY fs_list_script_dir TO ## MMG Application Schema##;`
 - `CREATE OR REPLACE DIRECTORY fs_list_control_dir AS '##<location of dir created in step 2>##/file_store/fs_list/control';`
 - `GRANT READ ON DIRECTORY fs_list_control_dir TO ##MMG Application Schema##;`
 - `CREATE OR REPLACE DIRECTORY external_tables_dir AS '##<location of dir created in step 2>##/file_store/fs_list/fccm-data';`
 - `GRANT READ ON DIRECTORY external_tables_dir TO ## MMG Application Schema##;`
 - `GRANT CREATE TABLE TO ##MMG Application Schema##;`

Once the above steps are completed, trigger the installation of the build.

Note

- If the new schema is residing on any-other DB server other than the one on which the above steps were performed then you must perform all the above steps on that respective server.
- Once you have configured the DB server, if a new schema is created on it you must perform the above steps for the respective schema.

Setup Password Stores with Oracle Wallet

This section describes the steps to create a wallet and the aliases for the database user accounts. For more information on configuring authentication and password stores, see the [Oracle Database Security Guide](#).

As part of an Application Installation, Administrators must set up password stores for Database User Accounts using Oracle Wallet. These password stores must be installed on the Application Database side. The Installer handles much of this process. The Administrators must perform some additional steps.

Setup the Password Stores for Database User Accounts

After the database is installed and the default Database User Accounts are set up, Administrators must set up a password store using the Oracle Wallet. This involves assigning an alias for the username and associated password for each Database User Account. The alias is used later during the application installation. This password store must be created on the system where the Application Server and database client are installed.

Note

In this section, `<wallet_location>` is a placeholder text for illustration purposes. Before running the command, ensure that you have already created the `<wallet_location>` directory where you want to create and store the wallet.

The wallet is created in the `<wallet_location>` directory with the auto-login feature enabled. This feature enables the database client to access the wallet contents without using the password. For more information, see [Oracle Database Security Guide](#).

To create a wallet, follow these steps:

1. Login to the server as a Linux user.
2. Create a wallet in the `<wallet_location>` using the following command:

```
mkstore -wrl <wallet_location> -create
```

Note

The `mkstore` utility is included in the Oracle Database Client Installation.

3. After you run the command, a prompt appears. Enter a password for the Oracle Wallet in the prompt.
A prompt appears to re-enter the password. Re-enter the password.

Figure 4-1 Wallet Creation

```

$ mkstore -wrl /scratch/ofsasftp/pgx_server/wallet -create
Oracle Secret Store Tool Release 19.0.0.0.0 - Production
Version 19.3.0.0.0
Copyright (c) 2004, 2019, Oracle and/or its affiliates. All rights reserved.

Enter password:
Enter password again:
$ mkstore -wrl /scratch/ofsasftp/pgx_server/wallet -createCredential MMGConfigSchema_Alias MMG_Config_Schema
Oracle Secret Store Tool Release 19.0.0.0.0 - Production
Version 19.3.0.0.0
Copyright (c) 2004, 2019, Oracle and/or its affiliates. All rights reserved.

Your secret/Password is missing in the command line
Enter your secret/Password:
Re-enter your secret/Password:
Enter your secret/Password:
Re-enter your secret/Password:
Enter wallet password:
$ mkstore -wrl /scratch/ofsasftp/pgx_server/wallet -createCredential MMGStudio_Schema_Alias MMG_Studio_Schema
Oracle Secret Store Tool Release 19.0.0.0.0 - Production
Version 19.3.0.0.0
Copyright (c) 2004, 2019, Oracle and/or its affiliates. All rights reserved.

Your secret/Password is missing in the command line
Enter your secret/Password:
Re-enter your secret/Password:
Enter wallet password:
$ mkstore -wrl /scratch/ofsasftp/pgx_server/wallet -createCredential MMGGraphSchema_Alias MMG_Graph_Schema
Oracle Secret Store Tool Release 19.0.0.0.0 - Production
Version 19.3.0.0.0
Copyright (c) 2004, 2019, Oracle and/or its affiliates. All rights reserved.

Your secret/Password is missing in the command line
Enter your secret/Password:
Re-enter your secret/Password:
Enter wallet password:
$

```

4. Create the database connection credentials for the MMG Schema using the following command:

```
mkstore -wrl <wallet_location> -createCredential <alias-name> <mmg-schema-name>
```

Here, MMG Schema is the same as explained in Create the MMG Schema section.

After you run the command, a prompt appears. Enter the password associated with the Database User Account in the prompt. You are prompted to re-enter the password. You are prompted for the wallet password used in Step 1.

Note

In this manner, create a wallet and associated database connection credentials for all the Database User Accounts including Graph, Studio, and DTP Schema.

After the wallet is created, go to the <wallet_location> directory and click Refresh to view the created wallet folder.

The wallet folder contains two files: **ewallet.p12** and **cwallet.sso**.

After you run the command, a prompt appears. Enter the password associated with the Database User Account in the prompt. You are prompted to re-enter the password. You are prompted for the wallet password used in Step 1.

Note

In this manner, create a wallet and associated database connection credentials for all the Database User Accounts including Graph, Studio, and DTP Schema.

After the wallet is created, go to the <wallet_location> directory and click Refresh to view the created wallet folder.

Note

In addition to creating wallet aliases for MMG Studio and Graph, you must also create wallet aliases for the production schemas; specifically, the config and atomic schemas. Ensure these aliases are added to the `tnsnames.ora` file.

The wallet folder contains two files: **ewallet.p12** and **cwallet.sso**.

- In the `<wallet_location>` directory, configure the `tnsnames.ora` file to include the entry for each alias name to be set up. Alias name can be renamed as wallet db alias name.

Note

- You can either update the existing `tnsnames.ora` file with the above details or create new `tnsnames.ora` file and add the required entries.
- `<alias-name>` is a user-defined value.

- Create a `sqlnet.ora` file in the wallet directory using the following content:

```
WALLET_LOCATION = (SOURCE = (METHOD = FILE) (METHOD_DATA =
(DIRECTORY = <Wallet_Location>)) ) SQLNET.WALLET_OVERRIDE=TRUE
SSL_CLIENT_AUTHENTICATION=FALSE
```

Here, `<Wallet_Location>` should be in below format:

```
WALLET_LOCATION = (SOURCE = (METHOD = FILE) (METHOD_DATA =
(DIRECTORY = <WALLET_PATH> ) ) )
```

Import Server Certificate to Java Keystore

You must import the server certificate (`.cer`) file to the Java keystore.

To import the server certificate, perform the following steps:

- Create a `.cer` file from the `server.keystore`.

```
keytool -export -alias <alias>-file <filename>.cer -keystore
<path_to_Keystore>/server.keystore -storepass secret
```

Example:

```
keytool -export -alias demo_alias -file server.cer -keystore OFS_MMG/config/
server.keystore -storepass secret
```

- Import `.cer` file generated from the above step to java keystore.

```
keytool -import -file "<path_to_Keystore>/<filename>.cer" -alias <alias>-
keystore "<java_home>/lib/security/cacerts" -storepass "changeit"
```

Note

The above step should be performed by the Root user.

Verify the Connectivity of the Wallet

To verify the connectivity of the wallet, follow these steps:

1. Test the connectivity using the following command:

Note

The ORACLE_HOME used with the wallet must be the same version or higher than the wallet created.

```
$ export WALLET_LOCATION=<wallet_location>
$ export TNS_ADMIN=<tnsnames.ora_location>. If you have created a new
tnsnames.ora file, provide the location of the new file.
$ sqlplus /@<alias_name>
```

The output is similar to:

```
SQL*Plus: Release 11
Connected to:
Oracle Database 12c
```

To verify if you are connected to the correct user:

```
SQL> show user
```

```
The output is similar to:
USER is "<database-user-name>"
```

5

Installation

This section provides detailed steps to install the application.

Prerequisites

The following are the list of prerequisites:

- If the OFS AAI version that is used in OFS MMG for authorization is release version 8.1.2.5.0, then the patch **35517225** must be installed in the OFS AAI setup.

- **Port Details**

MMG Studio uses the following ports by default, so make sure these are free:

Graph Service: 7059

Server: 7008

Markdown-Interpreter: 7009, 7029

Python-Interpreter: 7012, 7032, 6012

Shell-Interpreter: 7013, 7033

Plainr-Interpreter 7019, 7039, 6311 (Rserve port- configurable in plainr.Json)

PGX Server: 7007

PGX-Interpreter: 7022, 7042

JDBC-Interpreter: 7011, 7031

Coherence Cluster: 7574

Note

These are default ports provided in the installation kit. You can modify them in the configuration files if required to avoid conflicts with existing services.

Enhancements for Preinstall Check

Warning messages now appear for the following validations:

- To validate whether the given hostname is valid or not.
- To validate whether the given hostname and if the hostname in the keystore are matching.
- Error messages and failing the following preinstall checks:
 - To check if the `sso_token` is present or not.
 - To check if the public and private key are present in the `mmghome/conf` location.

Download the OFS MMG Installer Kit

To download the software as a .zip folder, download the mandatory minor release patch **38901294** from [My Oracle Support \(MOS\)](#).

Download the installer archive and copy (in Binary Mode) to the download directory that exists in the OFS MMG Installation Setup.

Extract the Software

You must be logged in to the UNIX Operating System as a Non-Root User to perform the following steps. To extract the software, follow these steps:

1. Download the unzip (OS-specific) `unzip_<os>.zip` and copy it in Binary Mode to the directory that is included in your PATH variable.

If you already have an unzip utility to extract the contents of the downloaded archive, skip this step. Uncompress the unzip installer file with the command:

```
uncompress unzip_<os>.Z
```

Note

If an error message "uncompress: not found [No such file or directory]" is displayed, contact your UNIX Administrator.

2. Assign execute (751) to the file with the following command:

```
chmod 751 unzip_<OS>
```

For example: `chmod 751 unzip_sparc`

3. Extract the contents of the OFS MMG Application Pack Release 26.1.0 installer archive file in the download directory with the following command:

```
unzip OFS_MMG_26.1.0_<OS>.zip
```

After unzipping the OFS_MMG_26.1.0 folder, following zip folders are displayed under OFS MMG folder.

- `mmg-installer.zip`
- `mmg-metadata-manager.zip`
- `mmg-pgx.zip`
- `OFSMMG_26.1.0_Readme.html`

Unzip `mmg-installer.zip` and the following components are available under `OFS_MMG/mmg-installer.zip`:

- `mmg-ui`
- `mmg-studio`
- `mmg-service`
- `mmg-schema-creator`
- `mmg-pipeline`
- `mmg-load-to-graph`

- lib
 - bin
 - conf
 - mmg-gateway
 - OFSMMG_26.1.0_Readme.html
4. Navigate to the download directory and assign execute permission to the installer directory with the following command:

```
chmod -R 750 OFS_MMG
```

Configure the config.sh file

To configure the `config.sh` file for installing the application, perform the following steps:

1. Log in to the server as a non-root user.
2. Navigate to the `<installation directory>/OFS_MMG/MMG/OFS_MMG/bin` directory.
3. Configure the following applicable `config.sh` attributes (click [config_26.1.0.txt](#) to view a sample of the file.) as tabulated in the following table:

Note

OFS MMG authenticates users by calling OFSAA over REST. You must ensure that the firewall or network rules allow outbound connectivity from the OFS MMG host or ports to the OFSAA host or ports that are used for authentication.

Note

DTP related parameters have been added in the `config.sh` file. To support these parameters, the `mmg-dtp` folder has been added and the `dtp-pipeline-logs` folder has been added that contains all the DTP pipeline related logs.

Note

Only tokens (classic) is supported. Fine grained is not yet supported.

Note

Ensure that `DATASTUDIO_ZPLN_SCHED_THREADPOOL_SIZE` is greater than `DATASTUDIO_SERVER_TOMCAT_THREADS_MAX+DATASTUDIO_SERVER_ASYNC_THREADPOOL_SIZE`

Note

Gateway is enabled by default and the gateway port is mandatory to access gateway enabled UI.

Table 5-1 config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
Common Application Properties General settings for the application, logging, and context.			
##ENB_GRP_SYNC##	This is the Enable Group sync property. When this is set as TRUE, then whichever groups have been added in AAI/SAML for that particular user will automatically get reflected in OFS MMG when logged in via that user. If a user has created any group in the OFS MMG application and logs out and then logs in again, the new group that was added will get removed because ENB_GRP_SYNC was set as TRUE. This means that it will sync groups from AAI/SAML. If ENB_GRP_SYNC is set as FALSE, then if the user creates groups in the OFS MMG application, logs out and then logs back in, that group will not be removed.	NA	NA
##ENB_CSTM_GRP##	This is the Enable Custom Group. When this is set as TRUE, the user can create any custom groups in the OFS MMG application. This must not be deleted when the user logs out and logs back into the application by using that particular user.	NA	NA
##APPLICATION_NAME##	Title of the application. If it is not replaced, then the default value is : Model Management and Governance .	YES	The defaults value is "Model Management and Governance." Note: Provide double quotes for the application name if it is long or contains spaces.

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##APPLICATION_ID##	The id will be stored as app_id and must be the same as mentioned in the APP_ID column of MMG_PATCHES table. Currently the UI displays the MMG Version <version number of application> and last applied MMG version.	YES	The APPLICATION_ID should be without spaces.
##MMG_LOG_DIR##	A writable folder designated for storing application and MMG Studio logs.	YES	/scratch/users/ logs <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;"> <p>Note</p> <p>Ensure that the log folder is created before installation.</p> </div>
##FTPSHARE_DIR##	This can be any writable folder accessible to the process owner.	YES	/scratch/users/ ftpshare Ensure that the ftpshare folder is created before installation. This should be same as the metadata directory mentioned above.
##MMG_LOG_TIMEZONE##	Specifies the timezone used for displaying log timestamps	YES	GMT+05:30, GMT-04:00, Asia/ Kolkata
##WEB_CONTEXT##	Context path of the application. This parameter is also present in the config.sh file of the DTP feature. When install.sh is triggered from OFS MMG, then this parameter gets updated with the same values in the config.sh of the DTP feature.	YES	MMG

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##RESTRICT_UNMAP PED_DATASTORES_A CCESS##	Restriction of users access to Data Stores from a workspace for unmapped datasources: If the value is set as True, then only the current workspace attached data stores will get a connection in the notebook sessions using get_conn(). This will only work if the session-mode in the application.yml is set to NOTEBOOK_USER. Only True/False is allowed.	YES	The default value is <i>False</i> .
##MMG_API_USERNA ME##	API user for FCC Studio.	YES	<div style="border: 1px solid #ccc; border-radius: 10px; padding: 10px; background-color: #f9f9f9;"> <p>Note</p> <p>If not applicable, enter NA</p> </div>
##MMG_SESSION_SE CRET##	The password used to generate the Authorization header token to communicate with mmg-services.	YES	<div style="border: 1px solid #ccc; border-radius: 10px; padding: 10px; background-color: #f9f9f9;"> <p>Note</p> <p>If not applicable, enter NA</p> </div>
##MMG_UI_FAVICON_ PATH##	Icon for the application. If not specified, it will default to the icon at the following location: css/images/ favicon.ico	NO	css/images/ favicon.ico
##MMG_MODEL_PIPE LINE_SANDBOX_DEF AULT_VIEW##	This controls the default UI view for the Model Pipeline Sandbox via mmg.pipeline.sandbox-default-view; effective values are canvas and notebook.	NO	The default is canvas. If this is not set or is invalid: services/build-ui/bin/install.sh changes the value to lowercases and forces it to canvas unless the value is exactly notebook.
SMTP host and port parameters for email notifications			

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##EMAIL_SMTP_HOST##	Hostname of the SMTP server used for email notification service. This value will be populated in the AAICL_SC_COMPONENT_DETAILS table.	YES	Defaults to localhost. Provide SMTP server hostname if external mail server is used.
##EMAIL_SMTP_PORT##	Port number for the SMTP server used for email notification service. This value will be populated in the AAICL_SC_COMPONENT_DETAILS table.	YES	Defaults to 25. Update this if your SMTP service listens on a different port.
Database and Wallet Settings			
Configurations for database connections, wallets, and schemas.			
##MMG_DB_WALLET_PATH##	The wallet is the folder that contains the sqlnet.ora, wallet.sso, and .p12 files.	YES	/scratch/users/wallet
##MMG_DB_TNS_ADMIN_PATH##	The folder that contains the tnsnames.ora file.	YES	/scratch/users/tns
##MMG_DB_SCHEMA_WALLET_ALIAS##	The wallet alias name that is configured for the MMG application config schema. This parameter is also present in the config.sh file of the DTP feature. When install.sh is triggered from OFS MMG, then this parameter gets updated with the same values in the config.sh of the DTP feature.	YES	MMG CONFIG
##DATASTUDIO_SCHEMA_WALLET_ALIAS##	This is the Studio data source wallet alias used to build the JDBC URL (jdbc:oracle:thin:@<alias>) for services/mmg-studio/conf/application.yml and to run the DATASTUDIO_DATASOURCE_UPDATE during install.		
##GRAPH_SCHEMA_WALLET_ALIAS##	Wallet alias created for the Graph Schema.	YES	NA

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##GRAPH_SCHEMA_DB_SCHEMA_NAME# #	Name of the Graph schema.	YES	NA
##GRAPH_DB_SERVER_NAME##	Name of the MMG Database Server.	YES	NA
##GRAPH_DB_PORT# #	The port of the MMG database server.	YES	NA
##GRAPH_DB_SERVICE_NAME##	Name of the MMG Database Service.	YES	NA
Network and Port Configurations			
Hostnames, ports for services, interpreters, and components.			
##MMG_SERVICE_HOST##	Hostname on which the backend service (mmg-service) runs. Use the same hostname wherever applicable.	YES	HostIP or FQDN
##MMG_SERVICE_PORT##	Port on which the backend service (mmg-service) needs to be run.	YES	7002
##MMG_UI_PORT##	Port on which the UI service (mmg-ui) needs to run.	YES	7001
##MMG_SCHEMA_CREATOR_PORT##	Port on which the Schema Creator service needs to run.	YES	7003
The following are the default ports 7008, 7009, 7012, -1. If needed, you can change the port numbers other than the default values.			
##DATASTUDIO_SERVER_PORT##	The port of the Data Studio server.	NO	The default value is 7008.
##DATASTUDIO_MARKDOWN_INTERPRETER_PORT##	The port of the Data Studio Markdown Interpreter.	NO	The default values are 7009, 7029.
##DATASTUDIO_PYTHON_INTERPRETER_PORT##	The port of the Data Studio Python Interpreter.	NO	The default values are 7012, 7032, 6012.
##DATASTUDIO_REMOTE_INTERPRETER_PORT##	The port that is assigned to the Data Studio R remote interpreter server; used in Studio startup/shutdown scripts and is written into r.json.	NO	The default value is -1 and is mapped in bin/initialize-install.sh. If this has not been set, then R interpreter stays disabled (-1).
##DATASTUDIO_JDBC_INTERPRETER_PORT##	The port of the Data Studio JDBC Interpreter.	NO	The default values are 7011, 7031.
##DATASTUDIO_PYTHON_INTERPRETER_REST_SERVER_PORT# #	The port of the Data Studio Python Interpreter Rest server.	NO	The default value is 6012

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DATASTUDIO_PGX_PYTHON_INTERPRETER_REST_SERVER_PORT##	The port of the Data Studio PGX Python Interpreter Rest server.	NO	The default value is 6022
##DATASTUDIO_THRIFT_EVENT_HANDLER_PORT##	The port of the Data Studio Thrift Event handler.	NO	The default value is 8432
##DATASTUDIO_PGX_INTERPRETER_PORT##	The port of the Data Studio PGX Interpreter.	NO	The default value is 7022.
##DATASTUDIO_SPARK_INTERPRETER_PORT##	This is the port that is assigned to the Data Studio Spark remote interpreter server. This is used in the Studio startup/shutdown scripts and written into spark.json.	NO	The default value is -1 and is mapped in bin/initialize-install.sh. If this has not been set then the Spark interpreter stays disabled (-1); services/mmg-studio/bin/install.sh also forces -1 when Spark is disabled.
##MMG_COHERENCE_CLUSTER_PORT##	This is the port where the Coherence Cluster for the Notification service runs. By default, this value is 7574.	YES	NA
##MMG_GATEWAY_PORT##	Specifies the port on which the MMG Gateway will run. This parameter is also present in the config.sh file of the DTP feature. When install.sh is triggered from OFS MMG, then this parameter gets updated with the same values in the config.sh of the DTP feature.	YES	NA
##GRAPH_SERVICE_PORT##	Graph Service Port	YES	By default, it is set as 7059. You should not modify the Graph Service Port if graphs are already created and executed.

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##GRAPH_SERVICE_CACHE_SERVER_PORT##	This is the port injected into the load-to-graph graph-service configuration as ##GRAPH_SERVICE_CACHE_SERVER_PORT##; appears to control the graph service cache server listener.	NA	If this is not set, then, no MMG-side defaulting logic was found. The downstream graph-service config/install behavior would determine the outcome.
##DATAPIPELINE_SERVICE_PORT1##	The port where the pipeline service resides.	YES	By default, it is set as 18005.
##DATAPIPELINE_SERVICE_PORT2##	The port where the data pipeline service resides.	YES	By default, it is set as 18006.
##DATAPIPELINE_METADATA_IMPORT_SERVICE_PORT##	Meta data import service port.	YES	By default, it is set as 18007.
##DATAPIPELINE_GATEWAY_SERVICE_PORT##	Data pipeline gateway service port.	YES	NA
##DATAPIPELINE_PIPELINE_UI_SERVICE_PORT##	Pipeline UI service port.	YES	NA
##DATAPIPELINE_DATA_PIPELINE_UI_SERVICE_PORT##	Data pipeline UI service port	YES	NA
##DATAPIPELINE_HAZELCAST_PORT##	This is the hazelcast port injected into the pipeline installation config as PPS_HAZELCAST_PORT and is used by the pipeline stack for Hazelcast clustering/discovery.	NA	If this is not set, then, no defaulting logic was found in the MMG installer scripts. The downstream pipeline install/runtime behavior would determine a failure.
SSL and Security Settings			
Settings for SSL, keystores, and security credentials.			
##MMG_SSL_ENABLE_D##	This enables HTTPS.	YES	Example: true

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##SSL_KEYSTORE_PATH##	<p>Absolute path for the keystore file.</p> <div style="border: 1px solid #ccc; padding: 5px; margin: 10px 0;"> <p>Note</p> <p>Run the following command to create a keystore:</p> </div> <pre>keytool -genkey -v -alias demoalias -keyalg RSA -keysize 2048 -keystore server.keystore -validity 3650 -keypass secret -storepass secret -storetype PKCS12</pre>	YES	<p>../conf/server.keystore. Include the file name in the path.</p> <p>If ##MMG_SSL_ENABLE D## is set to false, then you must configure the keystore for mmg-studio, as it is SSL-enabled by default. MMG application and MMG Studio can share the same SSL configuration if set up on the same server.</p>
##SSL_KEYSTORE_PASSWORD##	<p>Keystore secret</p> <p>The value passed in the aforementioned command for -keypass</p>	YES	Example: secret
##SSL_KEYSTORE_TYPE##	<p>Keystore type</p> <p>The value passed in the aforementioned command for -storetype.</p> <p>Can be either JKS or PKCS12</p>	YES	Example: PKCS12
##SSL_CERT_ALIAS#	<p>Keystore alias</p> <p>The value passed in the aforementioned command for -alias.</p>	YES	Example: demoalias
##GRAPH_KEYSTORE_PASSWORD##	<p>Graph Keystore Password.</p>	YES	Password
##AUTH_MMG_KEYS_DIR##	<p>Indicates public and private key location.</p>	YES	Example:< MMG Installation Path> / OFS_MMG/conf

Authentication and Authorization

Configurations for authentication types, SAML, LDAP, AAI, and sessions.

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##MMG_UI_AUTH_TYPE##	<p>aai – if using an existing AAI instance as the identity provider.</p> <p>saml – for saml based authentication</p> <p>ldap – for ldap based authentication</p> <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;"> <p>Note</p> <p>This is case sensitive</p> </div>	YES	Can be one of the following: aai, or saml or ldap.
##MMG_SERVICE_AUTH_TYPE##	Auth Type on which the backend service (mmg-service) runs.	YES	It defaults to public.
##DATASTUDIO_AUTH_TYPE##	<ul style="list-style-type: none"> • FCC_SSO – for SAMLRealm based authentication in FCC Studio • MMG_AAI- AAI based authentication for MMG Studio 	YES	Can be either MMG_AAI or FCC_SSO
##DATASTUDIO_SHOW_LOGIN##	<p>Can be either true/TRUE or false/FALSE (all caps or all small)</p> <p>Note: Set as true when the login screen of Studio is required. This property should be set as true if MMG application is non-SSL.</p>	YES	It defaults to true.
##DATASTUDIO_SESSION_MODE##	Can be either NOTEBOOK or NOTEBOOK_USER.	YES	If not set, it defaults to NOTEBOOK_USER.
##DATASTUDIO_AUTH_REALM##	Can be either OFSAALealm or saml.OFSAASamlReal m	YES	<p>OFSAALealm – the default realm for studio auth type FCC_AAI, MMG_AAI.</p> <p>.auth.saml.OFSAASaml Realm – for SAML specific studio authentication</p>

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DATASTUDIO_AAI_URL##	AAI login IDM Service URL. This is applicable only if ##DATASTUDIO_AUTH_TYPE ## is "MMG_AAI".	YES	Format: http://<ofsa-web-host>:<port>/<context>/rest-api For example, http://ABC00abc:4325/LLFP/rest-api The /rest-api is mandatory for OFSAA URL.
##DATASTUDIO_API_USERNAMES##	This is the API user with which the token is generated; if not set, it defaults to MMG_API_USER. Note: Use the same <API_USER> as given in the ##SSO_TOKEN##	YES	MMG_API_USER
##DATASTUDIO_VALID_ROLES_LIST##	MDLUSR,MDLREV,MDLAPPR The comma separated values for Studio-related roles in USER-ROLE mapping.	YES	MDLBATCHUSR, DSUSRGRP, DSREDACTGRP
AAI Authorization Applicable for SAML/LDAP profiles.			
##IS_USER_AUTHZ_FROM_AAI##	This is disabled and is set to <i>False</i> by default. Set IS_USER_AUTHZ_FROM_AAI to <i>True</i> to enable.	YES	
##AUTH_AAI_AUTH_URL##	Base URL of the AAI instance. Will be used for ##UI_AUTH_TYPE## = aai If the target AAI is https, then it is necessary to import the AAI host certificate into the MMG server Java keystore.	YES	http(s)://whfxxxx.in.oracle.com:7110/mmg

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##AUTH_AAI_OAUTH_CLIENT_ID##	This is an instance name generated via the sysadm in the OFSAA Application to which the aai_auth_url is pointing to. Create this in the OFSAA application in the location where you had configured the AAI Auth URL. <ul style="list-style-type: none"> a. Login as sysadm in OFSAA b. From System Configuration, navigate to Configure Instance Access Token c. Add a new access token. 	YES	
##AUTH_AAI_OAUTH_CLIENT_SECRET##	This is an instant access token.	YES	
##AUTH_AAI_COOKIE_DOMAIN##	The domain of the server.	YES	Example: in.xyz.com
SAML Configurations			
##AUTH_SAML_IDP_URL##	This is the endpoint on the IDP side where SAML requests are posted. The Service Provider (SP) needs to obtain this information from the Identity Provider (IDP).	Yes	http(s)://idcs-xxxx.com/fed/v1/idp/sso This is used only if ##MMG_UI_AUTH_TYPE## is SAML.
##AUTH_SAML_SP_ENTITY_URL##	Enter a globally unique name for SAML entity. It typically takes the URL of an identity provider or a service provider as a value.		http(s)://<UI_HOST>:<MMG_UI_PORT>/mmg This is used only if ##MMG_UI_AUTH_TYPE## is SAML.
##AUTH_SAML_ACS_URL##	UI Landing Page URL.	YES	http(s)://<UI_HOST>:<MMG_UI_PORT>/mmg/home This is used only if ##MMG_UI_AUTH_TYPE## is SAML.
##AUTH_SAML_LOGOUT_URL##	Initiated SAML Single Logout URL.	Yes	http(s)://idcs-xxxx.com/sso/v1/user/logout This is used only if ##MMG_UI_AUTH_TYPE## is SAML.

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##AUTH_SAML_SIGN_AUTHN_REQ##	NA	Yes	NA
##AUTH_SAML_SP_KEY_PATH##	NA	NA	/scratch/mmg8131/config/sp-privatekey.pem
##AUTH_SAML_SP_X509_CERT_PATH##	NA	NA	/scratch/mmg8131/config/sp-certificate.cer
##AUTH_SAML_SIGN_ALGORITHM##	<p>Specifies the XML Digital Signature algorithm URI to be used for signing SAML assertions/requests. The accepted values are:</p> <ul style="list-style-type: none"> • http://www.w3.org/2001/04/xmldsig-more#rsa-sha512 • http://www.w3.org/2001/04/xmldsig-more#rsa-sha384 • http://www.w3.org/2001/04/xmldsig-more#rsa-sha256 • http://www.w3.org/2000/09/xmldsig#rsa-sha1 	NA	##AUTH_SAML_SIGN_ALGORITHM##

Note

Configure this value to match the signing algorithm supported/required by your Identity Provider (IdP).

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##AUTH_SAML_BINDING_TYPE##	This can be set to REDIRECT (default) / POST.	NA	NA
##AUTH_SAML_INCLUDE_SP_CERT##	This can be set to True/False (default).	NA	NA
##AUTH_SAML_DS_ISSUER##	The SAML entity ID (Studio URL) configured in the IDP.	YES	https://<hostname>.xyz.com:7008
##AUTH_SAML_DS_DESTINATION##	The SAML IDP URL that the Identity Provider provides after creating the SAML application.	YES	https://idcs-xyzgvh.com/fed/v1/idp/sso
##AUTH_SAML_DS_ASSERTION_CONSUMER_URL##	The SAML Consume URL (Studio/URL/saml/consume) that is configured in IDP.	YES	https://<hostname>.xyz.com:7008/saml/consume
##AUTH_SAML_DS_ROLE_ATTRIBUTE##	The SAML client identifier provided by the SAML Administrator for the role and attributes information while creating the SAML application for MMG Studio. The attribute will contain the role required for the application.	YES	Example: group
##AUTH_SAML_DS_STUDIO_LOGOUT_URL##	The SAML client identifier provided by the SAML Administrator for the Logout URL information, while creating the SAML application for MMG Studio.	YES	https://idcs-xyzgvh.com/sso/v1/user/logout
##AUTH_SAML_DS_COOKIE_DOMAIN##	Domain of the server.	YES	Example: in.xyz.com
LDAP Configurations			
##AUTH_LDAP_URL#	LDAP URL Will be used for ##MMG_UI_AUTH_TYPE## = LDAP	YES	ldap://whf00xyz:3060/
##AUTH_LDAP_SEARCH_BASE_DN##	LDAP Search Base Will be used for ##MMG_UI_AUTH_TYPE## = LDAP	YES	"cn=Users,dc=oracle,dc=com"

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##AUTH_LDAP_USER_FILTER##	LDAP User Filter Will be used for ##MMG_UI_AUTH_TY PE## = LDAP	YES	"cn={0}"
##AUTH_LDAP_USER_SEARCH_FILTER##	LDAP User Search Filter Will be used for ##MMG_UI_AUTH_TY PE## = LDAP	YES	NA
##AUTH_LDAP_GROUP_FILTER##	LDAP Group Search Filter Will be used for ##MMG_UI_AUTH_TY PE## = LDAP	YES	NA
##AUTH_LDAP_GROUP_BASE_DN##	LDAP Group Search Base Will be used for ##MMG_UI_AUTH_TY PE## = LDAP	YES	NA
##AUTH_LDAP_GROUP_MEMBER_ATTR##	LDAP Group Member Will be used for ##MMG_UI_AUTH_TY PE## = LDAP	YES	NA
Cookie Settings			
##DATASTUDIO_SERVER_COOKIE_DOMAIN##	The domain name.	YES	This should be the domain name of the host server. Example: .in.xyz.com Note: If the MMG application is configured with the IP address, then provide the same.
##DATASTUDIO_SERVER_COOKIE_NAME##	The name for the cookie.	YES	If not set it will default to ORA_OLDS_SESSION
##DATASTUDIO_SERVER_COOKIE_TIMEOUT##	Timeout/expiry duration in seconds.	YES	If not set, it defaults to 999999
##DATASTUDIO_SERVER_COOKIE_IS_SECURE##	Specifies if we are using cookies to add an additional security layer to prevent cross-origin requests. Can be either true or false	YES	If not set, it defaults to true.
HTTP and Connection Pooling Settings for HTTP clients and datasource connection pools.			

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##MMG_HTTP_CLIENT_MAX_CONN##	The maximum number of connections allowed across all routes.	YES	The default value is 200. Set this to any one of the following values: <ul style="list-style-type: none"> • Low concurrency (10 users) + Normal usage (low cpu): 50 • Low concurrency (10 users)+High usage (time intensive): 100 • High concurrency (50 users) + Normal usage (low cpu): 200
##MMG_HTTP_CLIENT_MAX_CONN_PER_ROUTE##	The maximum number of HTTP connections allowed for a route.	YES	It defaults to 100. <ul style="list-style-type: none"> • Low concurrency (10 users) + Normal usage (low cpu): 40 • Low concurrency (10 users)+High usage (time intensive): 50 • High concurrency (50 users) + Normal usage (low cpu): 100
##MMG_HTTP_CLIENT_CONN_TIMEOUT_MS##	The connection timeout for HTTP connection. A timeout value of 0 specifies an infinite timeout.	YES	The default value is 30000.
##MMG_HTTP_CLIENT_READ_TIMEOUT_MS##	The socket read timeout for HTTP connection. A timeout value of 0 specifies an infinite timeout.	YES	The default value is 120000.
##MMG_CONFIG_DATASOURCE_MAX_POOL_SIZE##	Maximum connection pool size allowed for Config Datasource.	YES	The default value is 80. You can set this to any one of the following values: <ul style="list-style-type: none"> • Low concurrency (10 users) + Normal usage (low cpu): 16 • Low concurrency (10 users)+High usage (time intensive): 80 • High concurrency (50 users) + Normal usage (low cpu): 80

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##MMG_CONFIG_DATASOURCE_MIN_IDLE##	Hikari minimum idle is a configuration property for the HikariCP database connection pool that sets the minimum number of idle connections the pool should maintain. Its default value is 10, and it ensures that there are always a certain number of connections ready for use, which helps reduce latency when new requests arrive. If the number of idle connections falls below this value, HikariCP will quickly create new ones to restore the desired minimum.	YES	
##MMG_CONFIG_DATASOURCE_IDLE_TIMEOUT_MS##	Idle timeout for config Datasource.	YES	It defaults to 30000. You can edit it if required.
##MMG_CONFIG_DATASOURCE_CONNECTION_TIMEOUT_MS##	Connection timeout for Config Datasource.	YES	It defaults to 80000. You can edit it if required.
##MMG_EXT_DATASOURCE_MAX_POOL_SIZE##	Maximum connection pool size allowed for meta/data schemas.	YES	It defaults to 10. You can edit it if required.
##MMG_EXT_DATASOURCE_MIN_IDLE##	Hikari minimum idle is a configuration property for the HikariCP database connection pool that sets the minimum number of idle connections the pool should maintain. Its default value is 10, and it ensures that there are always a certain number of connections ready for use, which helps reduce latency when new requests arrive. If the number of idle connections falls below this value, HikariCP will quickly create new ones to restore the desired minimum.	YES	

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##MMG_EXT_DATASOURCE_IDLE_TIMEOUT_MS##	Idle timeout for meta/data schemas.	YES	It defaults to 30000. You can edit it if required.
##MMG_EXT_DATASOURCE_CONN_TIMEOUT_MS##	Connection timeout for meta/data schemas.	YES	It defaults to 80000. You can edit it if required.
Data Studio Hikari Pool			
##DATASTUDIO_HIKARI_MAXPOOLSIZ##	This setting controls the maximum number of database connections that can be maintained by the HikariCP connection pool in the Data Studio server. When the system needs to interact with a database (for data fetching, report generation, etc.), it requests a connection from the pool.	YES	The default value is 650. Set this to any one of the following values:
##DATASTUDIO_HIKARI_CONN_TIMEOUT_MS##	This setting controls the maximum time (in milliseconds) that the HikariCP connection pool will wait for an available database connection. If no connection is available within that time frame, it will throw an error.	YES	NA
##DATASTUDIO_HIKARI_MINIMUM_IDLE##	This determines the minimum number of idle connections HikariCP will maintain in the connection pool at all times. Even if there are no active requests for database connections, HikariCP will ensure that at least this number of idle connections remain open, ready to be used.	YES	NA

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DATASTUDIO_HIKARI_MAX_LIFE_TIME##	This controls the maximum duration a connection can stay open before being closed and replaced by a new one. This helps prevent issues like stale connections or long-lived, problematic connections that could lead to database issues or degrade performance over time. (Not a mandatory parameter)	NA	
External Schema Connection Pooling			
##GRAPH_EXT_SCHEMA_ENABLE_CP##	Enables/disables the external schema connection pooling for the graph-service load-to-graph configuration (EXT_SCHEMA_ENABLE_CP).	NA	If this has not been set, then, no MMG-side default was found. The generated graph-service config receives whatever value is provided, so the downstream behavior depends on the graph-service defaults/validation.
##GRAPH_EXT_SCHEMA_CP_MAX_IDLE##	The maximum number of idle connections allowed in the graph-service external schema connection pool (EXT_SCHEMA_CP_MAX_IDLE).	NA	If this is not set, then, no MMG-side defaulting logic was found. The downstream graph-service pooling configuration determines the effective behavior.
##GRAPH_EXT_SCHEMA_CP_MIN_IDLE##	Minimum number of idle connections to be retained in the graph-service external schema connection pool (EXT_SCHEMA_CP_MIN_IDLE).	NA	If this is not set, then, no MMG-side defaulting logic was found. The downstream graph-service pooling configuration determines the effective behavior.
##GRAPH_EXT_SCHEMA_CP_INITIAL_SIZE##	Initial size of the graph-service external schema connection pool (EXT_SCHEMA_CP_INITIAL_SIZE).	NA	If this is not set, then, no MMG-side defaulting logic was found. The downstream graph-service pooling configuration determines the effective behavior.

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
<code>##GRAPH_EXT_SCHEMA_CP_MAX_TOTAL#</code>	Maximum total connections allowed in the graph-service external schema connection pool (EXT_SCHEMA_CP_MAX_TOTAL).	NA	If this is not set, then, no MMG-side defaulting logic was found; downstream graph-service pooling configuration determines effective behavior.
<code>##GRAPH_EXT_SCHEMA_CP_MAX_WAIT_MILLIS##</code>	Maximum time in milliseconds that graph-service waits for an external schema pooled connection (EXT_SCHEMA_CP_MAX_WAIT_MILLIS).	NA	If this is not set, then, no MMG-side defaulting logic was found; downstream graph-service pooling configuration determines effective behavior.
<code>##GRAPH_EXT_SCHEMA_CP_MIN_EVICTABLE_IDLE_TIME##</code>	Minimum idle time before a connection in the graph-service external schema pool becomes eligible for eviction (EXT_SCHEMA_CP_MIN_EVICTABLE_IDLE_TIME).	NA	If this is not set, then, no MMG-side defaulting logic was found. The downstream graph-service pooling configuration determines the effective behavior.
<code>##GRAPH_EXT_SCHEMA_CP_SOFT_MIN_EVICTABLE_IDLE_TIME##</code>	Soft minimum idle time before graph-service may evict connections from the external schema pool while still trying to keep the configured minimum idle count (EXT_SCHEMA_CP_SOFT_MIN_EVICTABLE_IDLE_TIME).	NA	If this is not set, then, no MMG-side defaulting logic was found; downstream graph-service pooling configuration determines effective behavior.
Graph HikariCP Configuration Placeholders			
<code>##GRAPH_HIKARI_CP_MIN_IDLE##</code>	Defines the minimum number of idle connections that HikariCP maintains in the pool.	YES	
<code>##GRAPH_HIKARI_CP_MAX_POOL_SIZE##</code>	Specifies the maximum number of total connections (active + idle) allowed in the pool.	YES	
<code>##GRAPH_HIKARI_CP_IDLE_TIMEOUT##</code>	Sets the maximum time a connection can remain idle before being removed from the pool.	YES	

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##GRAPH_HIKARI_CP_MAX_LIFETIME##	Determines the maximum lifetime of a connection before it is retired and replaced.	YES	
##GRAPH_HIKARI_CP_TIMEOUT##	Defines how long HikariCP waits for a connection from the pool before timing out.	YES	
Data Studio Specific Settings Configurations specific to Data Studio, including interpreters and logging. By default, Data Studio is assumed to run on the same server. If it's running on a different host, uncomment the line below and provide the appropriate URL.			
##DATASTUDIO_URL# #	URL for MMG Studio.	YES	By default, Data Studio is assumed to run on the same server. If it is running on a different host, uncomment the line below and provide the appropriate URL. <code>https://<hostname/>IP>:7008/<contextpath></code> <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;"> <p>Note</p> <p>The default port for MMG Studio is 7008 and should not be modified.</p> </div>
##DATASTUDIO_LOG_LEVEL##	Logging level for logs.	YES	info, warn, debug or error logs
##DATASTUDIO_PYTHON_BINARY##	Home Path of Python Library. It defaults to python3 during installation. For a custom installation of python3 where the soft link is not configured, you can mention the complete path up to python3.	YES	python3
##MMG_PYTHON_INTERPRETER_LIST##	A comma separated value without whitespaces that specifies python interpreter python, fcc-ml4aml	YES	If not set, it defaults to python.

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DATASTUDIO_R_ENABLED##	This can be set to TRUE/true or FALSE/false depending on which R interpreter will be started and will be present in the interpreters list. Note: If you are using an older Studio schema with an R-interpreter already present and then install with DATASTUDIO_R_ENABLED set as FALSE; the R- interpreter will remain in the interpreter's menu of Studio and must be deleted from there.	YES	The default is False.
##DATASTUDIO_R_PYTHON_BINARY##	Python binary/directory used by the Data Studio R interpreter (R_PYTHON_HOME / plainr.json "Python directory").	NO	If not set, then, no explicit defaulting logic was found. The generated R interpreter config receives the provided value or placeholder, and R interpreter behavior depends on the Studio/R setup.
Spark and R Configurations			
Settings for Spark integration and R support.			
##DATASTUDIO_SPARK_ENABLED##	Enables or disables the Spark support for Data Studio and is mapped to the legacy MMG_SPARK_ENABLED.	NO	The default value is false when not explicitly set to true in bin/initialize-install.sh. If this has not been set then it is normalized to false, and services/mmg-studio/bin/install.sh disables the Spark interpreter by forcing DATASTUDIO_SPARK_INTERPRETER_PORT=-1.
##DATASTUDIO_SPARK_HOME##	Absolute path of Apache Spark Library.	NO	NA

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DATASTUDIO_HADOOP_HOME##	The hadoop home directory that are passed into the Studio startup/install scripts for Spark-related runtime configuration.	NO	If this is not set, then, no explicit defaulting logic was found. Spark-related runtime behavior depends on how Studio/Spark is configured.
##DATASTUDIO_SPARK_MASTER##	The spark master URL/mode that is written into the Studio Spark interpreter configuration (spark.json).	NO	If this is not set, then, no explicit default was found. services/mmg-studio/bin/install.sh has special handling only for SPARK_DEPLOY_MODE when master starts with local; otherwise Spark config uses the provided value.
##DATASTUDIO_SPARK_DEPLOY_MODE##	Spark deploy mode written into the Studio Spark interpreter configuration (spark.json), e.g. client/cluster depending on the Spark setup.	NO	No explicit default exists. If SPARK_MASTER starts with local and deploy mode is still the placeholder, then, services/mmg-studio/bin/install.sh clears it to an empty value.
External Services and URLs			
URLs and paths for external services, pipelines, and components.			
##CS_AUTH_SERVICE_URL##	The AUTH service URL that is activated after the fccstudio.sh file runs.	NO	Example: https://<hostname>:7041/authservice
##CS_META_SERVICE_URL##	The metaservice URL that is activated after the fccstudio.sh file runs.	NO	Example: https://<hostname>:7045/metaservice
##CS_ER_SERVICE_URL##	Used for the entity resolution service.	NO	Example: https://<hostname>:<port>
##CS_BATCH_SERVICE_URL##	Used for the batch service.	NO	Example: https://<hostname>:<port>/batchservice
##CS_TEMPLATE_CONFIG_PATH##	Configuration path of the Template.	NO	NA
##CS_TEMPLATE_DEFAULT_LINK##	Default link of the template.	NO	NA
URLS for pipeline, ER and matching service. Leave as it is if not applicable. Will impact the pipeline that could be added to a graph			
##CS_MATCHRULE_BASE_URL##	The host and port where the match rule service resides.	NO	http(s)://abc.in.xyz.com:7051

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##CS_LOADGRAPH_B ASE_URL##	The host and port where the load graph service resides.	YES	http(s)://abc.in.xyz.com:7059/graph-service
##CS_MATCHSRVC_U I_URL##	Matching Service UI resource path.	NO	NA
URLS for index service. Leave as it is if not applicable. Will impact the pipeline that could be added to a graph			
##GRAPH_INDEX_BA SE_URL##	Indicates the Graph Index resource path.	NO	http(s)://<hostname>xyz.com:7053/load-to-elastic-search
##GRAPH_LOAD_IND EX_UI_URL##	Indicates the Graph Load Index UI resource path.	NO	NA
##GRAPH_MATCHING _MECHANISM##	Indicates the matching mechanism for Entity Resolution and Graph Enter the value that is used for matching mechanism for Entity Resolution and Graph. The options are OS, and OT. Where OS refers to OpenSearch 2.7.0, and OT refers to Candidate Selection with Oracle Text matching. By default, the value of the parameter is OT. For GRAPH_MATCHING_MECHANISM = OT, no additional installation or configuration is required as it is part of the Oracle Database. NOTE: This is applicable for Compliance Studio.	NO	NA
##GRAPH_CANDIDAT E_SELECTION_SERVI CE_URL##	Enable this service for Entity Resolution and Graph use cases when GRAPH_MATCHING_MECHANISM is set to OT. NOTE: This is applicable for Compliance Studio.	NO	NA

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##GRAPH_LOAD_TO_OS_URL##	Provide the URL for Entity Resolution and Graph use cases when GRAPH_MATCHING_MECHANISM is set to OT. NOTE: This is applicable for Compliance Studio.	NO	NA
##EST_ENABLED##	Only used when EST application is integrated with MMG.	YES	The default value is FALSE.
##EST_UI_URL##	The URL of EST application. This is set based on ##EST_ENABLED## property.	NO	NA
##EST_SERVICE_URL##	The Base URL to STSA Backend Application	YES	<HOST_NAME>:<EST_SERVICE_SERVER_PORT>/<EST_SERVER_SERVLET_CONTEXT_PATH>
##DATACATALOG_SERVICE_URL##	Only used when EST application is integrated with MMG.	NO	NA
##DATAPIPELINE_METADATA_ARCHIVE_PATH##	The dump path for the pipeline service.	YES	/OFS_MMG/mmg-pipeline/pipeline/pipeline-service-x.x.x.x.x.
Graph and Advanced Features			
Configurations for graph services, memory limits, and paths.			
##GRAPH_INSTALLATION_PATH##	The installation path of the Graph.	YES	<MMG Installation Path>/OFS_MMG/mmg-load-to-graph/graph-service
##PGX_SERVER_URLS##	Indicates the pgx server resource path. Skip this if not installing pgx.	YES	http(s)://<hostname>.xyz.com:<pgx port>/<pgx context name>
##GRAPH_MAX_TOTAL_SHARED_DATA_MEMORY_SIZE##	Maximum total shared data memory size.	YES	Edit if required; default value is 20 GB.
##GRAPH_MAX_TOTAL_PRIVATE_DATA_MEMORY_SIZE##	Maximum total private data memory size.	YES	Edit if required; default value is 8 GB.
##GRAPH_MAX_PER_SESSION_DATA_MEMORY_SIZE##	Maximum per session data memory size.	YES	Edit if required; default value is 700 MB.
##GRAPH_MAX_DATA_MEMORY_SIZE_DSUSRGRP##	Maximum data memory size allowed for DSUSRGRP.	YES	Edit if required; default value is 10 GB.

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##GRAPH_MAX_DATA_MEMORY_SIZE_DSBATCH##	Maximum data memory size allowed for DSBATCH.	YES	Edit if required; default value is 10 GB.
##GRAPH_MAX_DATA_MEMORY_SIZE_DSINTER##	Maximum data memory size allowed for DSINTER.	YES	Edit if required; default value is 5 GB.
##GRAPH_MAX_DATA_MEMORY_SIZE_DSAPPROVER##	Maximum data memory size allowed for DSAPPROVER.	YES	Edit if required; default value is 5 GB.
##GRAPH_MAX_DATA_MEMORY_SIZE_DSUSER##	Maximum data memory size allowed for DSUSER.	YES	Edit if required; default value is 5 GB.
##GRAPH_MAX_DATA_MEMORY_SIZE_IHUSRGRP##	Maximum data memory size allowed for IHUSRGRP.	YES	Edit if required.
##GRAPH_DOCUMENT_DOWNLOAD_PATH#	Filesystem path injected into graph-service config as DOCUMENT_DOWNLOAD_PATH. This appears to be where the graph-related document downloads are stored/read.	NA	If this is not set, then, no MMG-side defaulting logic was found. The downstream graph-service behavior determines whether document download features fail.
Graph Proxy Configurations			
##GRAPH_NO_PROXY##	Proxy bypass list injected into graph-service config as NO_PROXY. This is used so that graph-related outbound calls can skip an HTTP proxy for specified hosts/domains.	NA	If this is not set, then, no MMG-side defaulting logic was found. The graph-service/runtime proxy behavior falls back to its own environment or defaults.
GIT and Proxy Configurations			
Properties for enabling git based import and export of model pipelines set username and PAT(personal access token) to access private remote repositories set proxy url and port if you are behind a firewall			

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##GIT_ENV_ID##	This variable represents the environment in which your GIT operations or deployments are being performed. Common environment names include dev (development), QA (quality assurance), SIT (system integration testing), PROD (production), and so on. It helps you to understand with which branch you need to work.	NA	##GIT_ENV_ID## A new group GIT ADMIN is created which is mapped to GIT_ADV role which is mapped to below functions. Kindly map the above group to the user to access the required GIT functionality: <ul style="list-style-type: none"> • GITVIEW • GITPUSH • GITPULL
##GIT_USERNAME##	This is your GitHub username.	NA	##GIT_USERNAME##
##GIT_PAT_SECRET# #	This variable stores your GitHub Personal Access Token (PAT). A PAT is a secret token used for authenticating API requests or GIT operations over HTTPS instead of a password.	NA	##GIT_PAT_SECRET# #
##GIT_PROXY_URL##	If your environment requires you to access external resources like GitHub through a proxy server, this variable defines the proxy server's hostname or IP Address.	NA	##GIT_PROXY_URL##
##GIT_PROXY_PORT##	This defines the port number on which the proxy server listens. It works together with GIT_PROXY_URL to route your Git traffic through the proxy.	NA	##GIT_PROXY_PORT##
Performance Tuning and Miscellaneous			
Performance parameters, timeouts, and optional features.			
##MMG_CSP_FRAME_ANCESTORS##	Configure this attribute to all or the AAI origin when MMG has to be embedded from AAI. By default, MMG pages cannot be embedded if Gateway is enabled. This is to prevent CLickjacking vulnerability.	YES	NA

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DATASTUDIO_CSP_FRAME_ANCESTORS##	<p>If the Gateway is enabled, this property can be set to control the pages where Data Studio can be embedded:</p> <ul style="list-style-type: none"> Set to '*' to allow embedding from any origin (less secure). Set to a comma-separated list of origins to allow embedding from those specified origins and from the same origin. <div style="border: 1px solid #ccc; padding: 10px; margin-top: 10px;"> <p>Note</p> <p>When specifying multiple origins for DATASTUDIO_CSP_FRAME_ANCESTORS, provide a comma-separated list with no spaces. Spaces after commas may be interpreted as part of the value and can result in incorrect CSP directives being generated in application.yml.</p> </div>	YES	NA

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>For Example :</p> <p>Working:</p> <pre>export DATAST UDIO_C SP_FRA ME_ANC ESTORS =</pre> </div> <p>[https:// localhost.com,http s:// localhost2.com,htt ps:// localhost3.com] https:// localhost.com,http s:// localhost2.com,htt ps:// localhost3.com] or export DATASTUDIO_CS P_FRAME_ANCE STORS='[https:// localhost.com,http s:// localhost2.com,htt ps:// localhost2.com https:// localhost.com,http s:// localhost2.com,htt ps:// localhost2.com]'</p> <p>Not supported (You must not include spaces after commas):</p> <pre>export DATASTUDIO_CS P_FRAME_ANCE STORS='[https:// localhost.com https:// localhost.com/], [https:// localhost2.com https:// localhost2.com/],</pre>		

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
	[https://localhost3.com https://localhost3.com/] By default, this is set to MMG Gateway URL.		
##MMG_MODEL_END POINT_RESTART_INTERVAL##	This is a fixed-rate interval, in milliseconds, for periodically restarting model endpoint servers (ENDPOINT_RESTART_INTERVAL).	NO	The default value is 43200000 milliseconds (12 hours). If this is not set / blank / non-numeric, then, services/mmg-service/bin/install.sh resets it to 43200000. ModelCatalogRestService uses it in @Scheduled(fixedRateString = "\${ENDPOINT_RESTART_INTERVAL}").
##DATASTUDIO_JOBS_INCOMPLETE_TIMEOUT##	You can configure how often a cleanup job will be run to mark unfinished jobs as incomplete by setting studio-server.jobs.incomplete.scheduled-cleanup-delay value. A job can be in incomplete state if the server restarts in the middle of a Job execution or if it takes longer the specified timeout (studio-server.jobs.incomplete.timeout).	Yes	NA
##DATASTUDIO_JOBS_INCOMPLETE_SCHEDULED_CLEANUP_DELAY##	You can configure how often a cleanup job will be run to mark unfinished jobs as incomplete by setting studio-server.jobs.incomplete.scheduled-cleanup-delay value. A job can be in incomplete state if the server restarts in the middle of a Job execution or if it takes longer the specified timeout (studio-server.jobs.incomplete.timeout).	Yes	NA

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DATASTUDIO_SECURITY_SESSION_TIMEOUT_MS##	You can configure user login sessions to be renewed by activity. The number specifies the amount of milliseconds a user session will be renewed after activity. When there is no user-activity within the specified relative timeout, the session expires and is no longer valid. Here activity means edit of paragraph content, addition or deletion of paragraph, execution of paragraph, etc.	Yes	43200000
##DATASTUDIO_SECURITY_ABSOLUTE_SESSION_TIMEOUT_MS##	You can configure user login sessions to be logged out automatically after a set amount of time. The number specifies the amount of milliseconds to pass after a session is created. When the timeout expires, the session is no longer valid Here login means when the user logs in to the Compliance Studio. When a user session ends, all associate executions will also be killed.	Yes	It is recommended to set this. A value of 0 means that the sessions will never time out. Users can set this to 86400000 to set a timeout of 24 hours or it can be set to 234000000 to set a timeout of 65 hours, in case the jobs are needed to be run the entire weekend.
##DATASTUDIO_INTERRUPTER_EXECUTION_RUN_TIMEOUT##	You can configure to automatically cancel a paragraph execution after a set amount of time. When the timeout expires, Data Studio will automatically interrupt the execution of the paragraph.	Yes	NA

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DATASTUDIO_INTE RPRETER_IDLE_SESS SION_TIMEOUT##	The amount of time an interpreter session can stay idle before getting invalidated by the application to free resources. An interpreter session is considered idle while it isn't running any tasks. Example values are: 1h (one hour), or use ISO 8601 duration format for more complex values like PT2H30M (2h30m).	NA	
##DATASTUDIO_INTE RPRETER_CLEANUP _ENABLED##	Idle sessions will never get invalidated if cleanup is not enabled by the additional settings described below, or when the idle-session-timeout value is set to 0.	Yes	False
##DATASTUDIO_INTE RPRETER_CLEANUP _CRON##	Refers to a scheduled cleanup task for an interpreter (such as the one that executes reports or queries) within a system like Data Studio, which helps optimize system performance by clearing out temporary or unused data at regular intervals.	Yes	
##DATASTUDIO_SERV ER_ASYNC_THREAD POOL_SIZE##	This is a configuration parameter for controlling the number of concurrent threads allocated to handle asynchronous tasks (like data processing, report rendering, etc.) on a Data Studio (or similar) server. It helps manage system performance, especially when many users are interacting with the system or large amounts of data need to be processed.	Yes	The default value is 128. Set this to any one of the following values: <ul style="list-style-type: none"> • Low concurrency (10 users) + Normal usage (low cpu): 32 • Low concurrency (10 users)+High usage (time intensive): 128 • High concurrency (50 users) + Normal usage (low cpu): 128

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DATASTUDIO_SERVER_SCHEDULED_THREADPOOL_SIZE##	This is a setting that controls the number of concurrent threads available for executing scheduled tasks on the Data Studio server. By adjusting this, you can manage how many tasks, such as data refreshes or scheduled reports, can be processed in parallel.	Yes	The default value is 128. Set this to any one of the following values: <ul style="list-style-type: none"> • Low concurrency (10 users) + Normal usage (low cpu): 32 • Low concurrency (10 users)+High usage (time intensive): 128 • High concurrency (50 users) + Normal usage (low cpu): 128
##DATASTUDIO_SERVER_TOMCAT_THREADS_MAX##	This controls the maximum number of concurrent threads that the Tomcat server can use to process incoming requests.	Yes	Set this to any one of the following values: <ul style="list-style-type: none"> • Low concurrency (10 users) + Normal usage (low cpu): 100 • Low concurrency (10 users)+High usage (time intensive): 200 • High concurrency (50 users) + Normal usage (low cpu): 200 • High concurrency (50 users) + High usage (time intensive): 500
##DATASTUDIO_ZPLN_SCHEDULED_THREADPOOL_SIZE##	This controls the number of threads in the ZPLN scheduler's thread pool, determining how many concurrent tasks the system can handle	Yes	NA
Optional Features enabled by default			
##MMG_HTTP2_ENABLED##	This enables HTTP/2 for the UI, service, and gateway via <code>server.http2.enabled</code> .	NO	By default it is enabled to true. If it is not set then, <code>bin/initialize-install.sh</code> normalizes any value other than explicit false to true.

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##MMG_SERVER_ACCESS_LOG_ENABLE D##	This enables the Jetty access logs for the UI and service via <code>server.jetty.accesslog.enabled</code> .	NO	By default this is enabled to <code>true</code> . If this is not set then <code>bin/initialize-install.sh</code> normalizes any value other than explicit <code>false</code> to <code>true</code> .
disabled by default			
##OJET_CDN_ENABLED##	Controls whether the UI loads Oracle JET assets from a CDN via <code>mmg.ojet-cdn.enabled</code> .	NO	This is disabled by default (<code>false</code>). If it is not set, then, <code>bin/initialize-install.sh</code> normalizes any value other than explicit <code>true</code> to <code>false</code> .
##DTP_PIPELINE_SERVICE_PORT##	This is the port for the backend DTP Pipeline Service.	NA	NA
##DTP_PIPELINE_FILES##	The absolute file system path for the pipeline files directory that is used by the DTP pipeline service.	NA	NA
##DTP_DATA_PIPELINE_SERVICE_PORT##	This is the port for the backend DTP data pipeline service.	NA	NA
##DTP_SCENARIO_PIPELINE_SERVICE_PORT##	This is the port for the backend DTP scenario pipeline service.	NA	NA
##DTP_SCENARIO_METADATA_JOB_PORT##	This is the port used by the scenario metadata job component.	NA	NA
##DTP_PIPELINE_SCHEMA_ALIAS##	The database TNS alias or service name for the DTP schema connection.	NA	NA
##DTP_DATA_METADATA_JOB_PORT##	The port number on which the <code>ctp-data-metadata-job</code> should run to import metadata related to the "Data Pipeline" type.	YES	If not set: The pre-install check fails with DTP_DATA_METADATA_JOB_PORT is not configured. If already in use: The pre-install check fails with DTP_DATA_METADATA_JOB_PORT <PORT_NUMBER> is in Use
UI and Gateway ports for DTP services			

Table 5-1 (Cont.) config.sh File Parameters and Descriptions

Parameter	Description	Is Mandatory	Comments
##DTP_DATA_PIPELINE_SERVICE_UI_PORT##	This is the port for the DTP data pipeline service UI.	NA	NA
##DTP_PIPELINE_SERVICE_UI_PORT##	This is the port for the DTP pipeline service UI.	NA	NA
##DTP_SCENARIO_PIPELINE_SERVICE_UI_PORT##	This is the port for the DTP scenario pipeline service UI.	NA	NA
##DTP_GATEWAY_SERVICE_UI_PORT##	This is the port for the DTP gateway.	NA	NA
<p>Scheduler Timezone Properties. If either SCHEDULER_TIMEZONE or SCHEDULER_TIMEZONE_DISPLAY_NAME is unset, a default value of UTC will be applied during installation.</p> <p>Configured for aai-scheduler team</p>			
##SCHEDULER_TIMEZONE##	This displays the timezone ID for the respective region. For the list of supported timezones, see the Appendix I - List of Supported Timezones .		The default timezone is UTC (Coordinated Universal Time).
##SCHEDULER_TIMEZONE_DISPLAY_NAME##	This property is used to display the timezone region information in the Schedule screen. The value in this field must be provided in the "" format.		The default timezone is UTC (Coordinated Universal Time).

Note

If changes are done directly on the UI and then restarted, then the overwrite will not be triggered and the configuration will not change. It is only dependent on the file system JSON.

Note

- In case of `##DATASTUDIO_AAI_URL##` and `##MMG_SVC_URL##`, do not add any ending `'/'` in the URLs
- If the pool size, connection timeout and idle timeout are not configured, then it will proceed with the default Hikari Configurations.
- The default session timeout is 3600 seconds (60 mins). You can configure the timeout by using the `server.servlet.session.timeout` property.
- If the AUTH type specified is AAI, make sure the AAI System has appropriate user groups mapped for the users. `WKSPADMIN`, `IDNTYADMN`, `IDNTYAUTH` need to be present for a successful subsequent logins.
- The name for the MMG Studio cookie is `ORA_OLDS_SESSION`.
- If the `##MMG_SSL_ENABLED##` is set to false, the keystore configuration must be done for `mmg-studio` as it is SSL enabled by default. MMG application and MMG Studio can use the same SSL configuration if configured in the same server.
- The wallet is the same for all the MMG services including MMG Studio. Hence, if you want to use MMG Studio with wallet configurations, then configure it in the same wallet.
- If MMG Studio is remotely configured, then the MMG Application Configuration Schema wallet alias and `tnsnames.ora` file entries need to be added to the MMG Studio configured wallet and `tnsnames.ora` file.
- If the MMG application is Non SSL, set the below property to "false" in the `application.yml` file inside MMG Studio and restart the services.


```
security:
  cookies:
    secure: false
```

Note

The flag `*IS_SELF_USR_GRP_AUTH_ALLOWED*` in the `NEXTGENEMF_CONFIG` table is used to check if the Self Groups Approvers/Reviewers are allowed or not. If it is 'Y', then the Requested User as well Approvers and Reviewers can belong to the same user group. Otherwise, **'Self User Group Authorization is not allowed'** is returned.

Support of Alphanumeric Name in SAML Entity ID for SAML Configuration

MMG Application: `mmg_ui/application.properties` file contains SAML entity `saml.auth.sp.entity` placeholder that contains values like `https://<FQDN of compliance server>:7001/cs`

However, the requirement is to have this parameter value as `amlcs8126` i.e. support of SAML Entity ID as alphanumeric name.

The expected value from SAML team:
`saml.auth.sp.entity="amlcs8126":`

Entity ID should not contain below special character as per ForgeRock MF Authentication (Policy sets in the UI: ForgeRock Identity Cloud docs).

The regex allowed is: `^[A-Za-z0-9,.\ \/:@&?\ _]+$,` and it should be passed in a string.

Run the MMG Installer

To run the MMG Installer, follow these steps:

1. Navigate to following path:

Go to `<MMG_INSTALLATION_PATH>/bin` directory.

2. Run the following command:

```
./install.sh
```

Note

When `./install.sh` command is triggered, pre-installation utility validates install configurations such as availability of ports, ftpshare/log folders, database connections, and so on.

This step will install the configurations and has to be executed only once per deployment. This will also bring up the Schema Creator Service in nohup mode.

A message similar to following means a successful startup:

```
<MMG_INSTALLATION_PATH>/OFS_MMG/bin>./install.sh
```

```
Pre Install Validation Successful
```

```
PIPELINE_HOME: <MMG_INSTALLATION_PATH>/OFS_MMG/mmg-pipeline/pipeline
```

```
<MMG_INSTALLATION_PATH>/OFS_MMG/mmg-pipeline/pipeline
```

```
PIPELINE_HOME: <MMG_INSTALLATION_PATH>/OFS_MMG/mmg-pipeline/pipeline
```

```
Installing Pipeline Data Model. Please Wait ...
```

```
Pipeline Data Model installation finished.
```

```
Starting Gateway ...
```

```
Starting Pipeline UI Service ...
```

```
Starting Pipeline Service ...
```

```
Starting Data Pipeline UI Service ...
```

```
Starting Data pipeline services ...
```

```
Inserting DataMeta Data ...
```

```
***** Data Pipeline Deployment Done *****
```

```
DTP_PIPELINE_HOME: <MMG_INSTALLATION_PATH>/OFS_MMG/mmg-dtp/dtp-pipeline
```

```
<MMG_INSTALLATION_PATH>/OFS_MMG/mmg-dtp/dtp-pipeline
```

```
DTP_PIPELINE_HOME: <MMG_INSTALLATION_PATH>/OFS_MMG/mmg-dtp/dtp-pipeline
```

```
Installing DTP Pipeline Data Model. Please Wait ...
```

```
DTP Pipeline Data Model installation finished.
Starting DTP Gateway ...
Starting DTP Pipeline Service UI...
Starting DTP Pipeline Service ...
Starting DTP Data Pipeline Service UI...
Starting DTP Data pipeline services ...
Starting DTP Scenario Pipeline Service UI...
Starting DTP Scenario pipeline services ...
Inserting Scenario MetaData ...
***** Data Pipeline Deployment Done *****
Stopping Graph-Service service...
./../mmg-load-to-graph/graph-service/bin/stop-script.sh: line 29: kill: (2479738) - Operation
not permitted
Graph-Service stopped.
AAI Lite Schema creator executed.
Schema Creator executed successfully for config schema
Schema Creator for config executed successfully. Now triggering for graph-schema
./../mmg-schema-creator/bin/startup.sh: line 123: 2742584 Killed nohup java -jar -
Doracle.net.tns_admin=/scratch/upgtest26 -Doracle.net.wallet_location=/scratch/
upgtest26/wallet -Dspring.config.location=../conf/ -Dspring.datasource.url=jdbc
thin:@conf_als -Dlogging.config=../conf/log4j2.xml -Dspring.liquibase.change-log=file:../
scripts/changelog-master.xml $JAVA_OPTS ../lib/mmg-schema-creator.war > nohup.out
2>&1
Schema Creator executed successfully for graph schema
nohup: ignoring input and redirecting stderr to stdout
Stopping Graph-Service service...
./../mmg-load-to-graph/graph-service/bin/stop-script.sh: line 29: kill: (2479738) - Operation
not permitted
Graph-Service stopped.
nohup: ignoring input and redirecting stderr to stdout
You can check mmg-schema-creator/bin/nohup.out to check if the service comes up
properly.
Started BuildSchemaCreatorApplication in 20.317 seconds (JVM running for 21.26)
```

 Warning

If you notice any errors, do not proceed further. Contact [My Oracle Support \(MOS\)](#) and provide the applicable error code and log files.

3. Execute `shutdown.sh` and trigger `startup.sh` for the services to come up. For more details, refer to the below sections.

Note

The MMG Application is installed with or without OFSAA, depending on the configuration provided in the `config.sh` file.

Modify the Logging Level

The log rotation policy in the default OFS MMG setup is set to create a new log file whenever the size crosses 5MB and also to retain the last 5 log files. This feature is customizable. Additionally, the logging level can be modified to `mmg-service`, `mmg-ui`, `mmg-studio` etc.

The log config file for each service is present at the following locations. A backup can be taken and updates can be performed on the same:

- `<MMG_INSTALLATION_PATH>/mmg-service/conf/log4j2.xml`
- `<MMG_INSTALLATION_PATH>/mmg-ui/conf/log4j2.xml`
- `<MMG_INSTALLATION_PATH>/mmg-studio/conf/log*.xml`
- `<MMG_INSTALLATION_PATH>/mmg-gateway/conf/log4j2.xml`

Sample 1 (Size based rolling)

```
<Appenders>
<RollingFile name="RollingFile">
  <FileName>##LOG_HOME##/services/mmg-service.log</FileName>
  <FilePattern>##LOG_HOME##/services/mmg-service.%i.log.zip</FilePattern>
  <PatternLayout pattern="%d{dd-MM-yyyy HH:mm:ss.SSS}{##LOG_TIMEZONE##}
[%18.18t] %-5p [%c{1}] - %m%n"/>
  <Policies>
    <!-- New log once the current size crosses 10MB -->
    <SizeBasedTriggeringPolicy size="10MB"/>
  </Policies>
  <!-- keep last 20 log files -->
  <DefaultRolloverStrategy max="20"/>
</RollingFile>
<RollingFile name="HealthCheckFile">
  <FileName>##LOG_HOME##/services/mmg-health.log</FileName>
  <FilePattern>##LOG_HOME##/services/mmg-health.%i.log.zip</FilePattern>
  <PatternLayout pattern="%d{dd-MM-yyyy HH:mm:ss.SSS}{##LOG_TIMEZONE##}
[%18.18t] %-5p - %m%n"/>
  <Policies>
    <!-- New log once the current size crosses 12MB -->
    <SizeBasedTriggeringPolicy size="12MB"/>
  </Policies>
  <!-- keep last 15 log files -->
  <DefaultRolloverStrategy max="15"/>
</RollingFile>
<Console name="Console" target="SYSTEM_OUT">
  <PatternLayout pattern="%d{dd-MM-yyyy HH:mm:ss.SSS}{##LOG_TIMEZONE##}
[%18.18t] %-5p [%c{1}] - %m%n"/>
</Console>
</Appenders>
```

Sample 2 (Day based logs rolling at midnight)

```

<Appenders>
  <RollingFile name="RollingFile"
    fileName="##LOG_HOME##/services/mmg-service.log"
    filePattern="##LOG_HOME##/services/mmg-service-%d{yyyy-MM-dd}.log.gz">
    <PatternLayout pattern="%d{dd-MM-yyyy HH:mm:ss.SSS}{##LOG_TIMEZONE##} [%18.18t] %-5p [%c{1}] - %m%n"/>
  <Policies>
    <!-- rollover at midnight -->
    <TimeBasedTriggeringPolicy interval="1" modulate="true"/>
  </Policies>
  <!-- keep last 10 daily logs -->
  <DefaultRolloverStrategy max="10"/>
</RollingFile>
  <RollingFile name="HealthCheckFile"
    fileName="##LOG_HOME##/services/mmg-health.log"
    filePattern="##LOG_HOME##/services/mmg-health-%d{yyyy-MM-dd}.log.gz">
    <PatternLayout pattern="%d{dd-MM-yyyy HH:mm:ss.SSS}{##LOG_TIMEZONE##} [%18.18t] %-5p - %m%n"/>
  <Policies>
    <!-- rollover at midnight -->
    <TimeBasedTriggeringPolicy interval="1" modulate="true"/>
  </Policies>
  <!-- keep last 15 daily logs -->
  <DefaultRolloverStrategy max="15"/>
</RollingFile>
  <Console name="Console" target="SYSTEM_OUT">
    <PatternLayout pattern="%d{dd-MM-yyyy HH:mm:ss.SSS}{##LOG_TIMEZONE##} [%18.18t] %-5p [%c{1}] - %m%n"/>
  </Console>
</Appenders>

```

Sample 3 (Hourly log files)

```

<Appenders>
  <RollingFile name="RollingFile"
    fileName="##LOG_HOME##/services/mmg-service.log"
    filePattern="##LOG_HOME##/services/mmg-service-%d{yyyy-MM-dd-HH}.log.gz">
    <PatternLayout pattern="%d{dd-MM-yyyy HH:mm:ss.SSS}{##LOG_TIMEZONE##} [%18.18t] %-5p [%c{1}] - %m%n"/>
  <Policies>
    <!-- rollover every hour on the clock -->
    <TimeBasedTriggeringPolicy interval="1" modulate="true"/>
  </Policies>
  <!-- keep last 10 hourly logs -->
  <DefaultRolloverStrategy max="10"/>
</RollingFile>
  <RollingFile name="HealthCheckFile"
    fileName="##LOG_HOME##/services/mmg-health.log"
    filePattern="##LOG_HOME##/services/mmg-health-%d{yyyy-MM-dd-

```

```

HH}.log.gz">
  <PatternLayout pattern="%d{dd-MM-yyyy HH:mm:ss.SSS}{##LOG_TIMEZONE##}
[%18.18t] %-5p - %m%n"/>
  <Policies>
    <!-- rollover every hour on the clock -->
    <TimeBasedTriggeringPolicy interval="1" modulate="true"/>
  </Policies>
  <!-- keep last 15 hourly logs -->
  <DefaultRolloverStrategy max="15"/>
</RollingFile>
<Console name="Console" target="SYSTEM_OUT">
  <PatternLayout pattern="%d{dd-MM-yyyy HH:mm:ss.SSS}{##LOG_TIMEZONE##}
[%18.18t] %-5p [%c{1}] - %m%n"/>
  </Console>
</Appenders>

```

Starting MMG Services

To start the MMG service, run the following command:

- Navigate to <MMG_INSTALLATION_PATH>/bin directory. ./startup.sh

A message similar to following means a successful startup:

```

./startup.sh
Starting MMG UI...
MMG UI started successfully.
Starting MMG Service...
MMG Service started successfully.
Starting Data Studio...
Data Studio started successfully.
Starting Gateway ...
Starting Pipeline UI Service ...
Starting Pipeline Service ...
Starting Data Pipeline UI Service ...
Starting Data pipeline services ...
Starting Gateway ...
Starting DTP Pipeline Service UI ...
Starting DTP Pipeline Service ...
Starting DTP Data Pipeline Service UI...
Starting DTP Data pipeline services ...
Starting DTP Scenario Pipeline Service UI...
Starting DTP Scenario pipeline services ...
Starting MMG Gateway...
MMG Gateway started successfully.

```

You may check `<MMG_INSTALLATION_PATH>/mmg-ui/bin/nohup.out` to check if the UI service comes up properly.

A message similar to following means a successful startup:

```
Started BuildUIServiceApplication in 27.981 seconds (JVM running for 29.365)
```

You can check `<MMG_INSTALLATION_PATH>/mmg-service/bin/nohup.out` to check if the backend service comes up properly.

A message similar to following means a successful startup:

```
Started BuildServiceBuildApplication in 20.317 seconds (JVM running for 21.26)
```

You can check `<MMG_INSTALLATION_PATH>/mmg-studio/bin/nohup.out` to check if the backend service comes up properly.

A message similar to following means a successful startup:

```
05:06:02.155 Thread-9] INFO oracle.datastudio.starter.App - Data Studio Server is ready to use
```

This will start the successful installation of application.

Warning

If you notice any errors, do not proceed further. Contact [My Oracle Support \(MOS\)](#) and provide the applicable error code and log files.

Note

Unset the https/http proxy details before starting the services.
OR

Add the relevant entries in `no_proxy` with mmg hosted server details.

Stopping MMG Services

To stop the MMG services, run the following command: `./shutdown.sh`

A message similar to following means a successful shutdown:

```
MMG UI shutdown is complete.
```

```
MMG Service shutdown is complete.
```

```
MMG Schema Creator shutdown is complete.
```

```
Data Studio shutdown is complete.
```

```
Data Pipeline Service shutdown is complete.
```

```
DTP Pipeline Service shutdown is complete.
```

```
DTP Pipeline Service UI shutdown is complete.
```

```
DTP Data Pipeline Service shutdown is complete.
```

```
DTP Data Pipeline Service UI shutdown is complete.
```

DTP Scenario Pipeline Service shutdown is complete.

DTP Scenario Pipeline Service UI shutdown is complete.

MMG Gateway shutdown is complete.

Generate GRAPH-KEYSTORE.P12

Graph services should be up and running.

To generate GRAPH-KEYSTORE.P12 file, perform the below steps:

Note

The Keystore generation fails if graph service is down.

1. Execute `graph-keystore-generator.sh` using PUTTY.

2. Enter the values as below when prompted.

Enter Wallet Alias : <GRAPH_SCHEMA_WALLET_ALIAS> as given in the `config.sh` file.

Enter Password: <GRAPH_SCHEMA_DB_SCHEMA> password

Enter Keystore alias: <GRAPH_SCHEMA_DB_SCHEMA_NAME> as given in the `config.sh` file.

Check the below location for the `graph-keystore.p12`

<mmg installation path>/OFS MMG/mmg-load-to-graph/graph-service/conf/

Installing Conda

Conda as a package manager helps you to find and install packages. With the capability of environment manager, you can set up a totally separate environment to run different versions of Python. In addition, you can continue to run your usual version of Python in your normal environment.

Note

The supported version is 4.14.0.

To install the Conda, perform the following:

1. Download the [miniconda](#).

2. Copy it to your server where the Conda needs to be installed.

3. Grant execute permission to the Conda folder.

4. Execute the following command: `$./Miniconda3-latest-Linux-x86_64.sh`

5. Update the PATH variable with miniconda installation path:

<install_path>/miniconda3/bin

Note

In the current release, the Conda feature is not supported in Solaris Operating System.

For more details on the Roles and privileges, see *MMG User Guide*.

Installing Python Library

This section provides detailed steps to install the Python Library.

Prerequisites

- Python 3.8.x and above

Note

Ensure the libraries, `bzip2-devel`, `sqlite-devel`, `ncurses-devel`, and `xz-devel`, `libffi-devel` are installed before you install the Python package.

For Example:

Note

Install the below libraries as a root user.

- **bzip2-devel:** Execute the command `yum install bzip2-devel`
- **sqlite-devel:** Install as a root user using the command `yum install sqlite-devel`
- **ncurses-devel:** Install as a root user using the command `yum install ncurses-devel`
- **xz-devel:** Install as a root user using the command `yum install xz-devel`
- **libffi-devel:** Install as a root user using the command `yum install libffi-devel`

Note

In order to download the latest python packages after MMG upgrade, the pip cache in the server user home directory needs to be cleared.

Path: `$HOME/.cache/pip`

Installing the OFS MMG Python Library and Dependencies (`python-env-install.sh`)

The `python-env-install.sh` script is available in the following location:

```
<MMG_INSTALLED_DIR>/OFS_MMG/bin
```

Set the python3 interpreter to the environment that you intend to use and navigate to the following folder:

```
<INSTALLER_DIR>/OFS_MMG/bin
```

To install the OFS MMG library with dependencies from `conf/requirements.txt`, execute one of the following commands:

- **System / shared Python installation (requires permission to write to site-packages):**
`./python-env-install.sh`
- **User-level installation (use this when packages must be installed at user level / you do not have permission to write to site-packages):**
`./python-env-install.sh --user`

The `--user` option installs the packages under the invoking user's local Python package directory.

Conda environment installation:

The `--user` option is not required when using a Conda environment. Ensure that python3 is pointing to the intended Conda environment before running the script.

To install the OFS MMG library with flexible dependencies or if you are using the already installed dependent packages, then execute the following command:

```
./python-env-install.sh -S
```

or

```
./python-env-install.sh --skip
```

This skips the dependency installation based on the versions as specified in `conf/requirements.txt` and proceeds with the versions available in the configured package repository.

To install the Apache Flink Python packages, execute:

```
./python-env-install.sh --include-flink
```

Procedure

1. Set system python3 to the one that is to be used. Navigate to bin folder.
2. To install the mmg library with dependencies from `conf/requirements.txt`, execute the following command:

```
./python-env-install.sh
```

The following parameter is supported for `python-env-install.sh` file:

`--user` need to be passed in case the packages has to be installed at user level.

This is not required in case of Conda environment but python3 must be configured to the appropriate Conda environments.

Note

Expose Python variables/functions to derive File Path when saving files directly from Notebook script (without using Save Widget).

3. To install the mmg library with flexible dependencies or using already installed dependent packages, execute the following command:

```
./python-env-install.sh -S
```

OR

```
./python-env-install.sh --skip
```

This will skip the installation of dependency based on the version mentioned in the conf/requirements.txt. The installation will be with whatever version available in the pypi server.

4. To install the Apache Flink packages, execute the following command:

```
./python-env-install.sh --include-flink
```

Note

Ignore the below error message during Apache Flink package installation.

```
ERROR: pip's dependency resolver does not currently take into account  
all the
```

```
packages that are installed. This behavior is the source of the  
following dependency conflicts.
```

```
modin 0.19.0 requires pandas==1.5.3, but you have pandas 1.3.5 which  
is incompatible.
```

```
Successfully installed numpy-1.21.4 pandas-1.3.5 python-dateutil-2.8.0
```

```
Installing with dependencies
```

```
ERROR: pip's dependency resolver does not currently take into account  
all the
```

```
packages that are installed. This behavior is the source of the  
following dependency conflicts.
```

```
pemja 0.2.6 requires numpy==1.21.4, but you have numpy 1.24.2 which is  
incompatible.
```

```
apache-flink 1.16.1 requires numpy<1.22.0,>=1.21.4;  
python_full_version >=
```

```
"3.7", but you have numpy 1.24.2 which is incompatible.
```

```
apache-flink 1.16.1 requires pandas<1.4.0,>=1.3.0; python_full_version  
>=
```

```
"3.7", but you have pandas 1.5.3 which is incompatible.
```

```
apache-flink 1.16.1 requires python-dateutil==2.8.0, but you have  
python-dateutil 2.8.2 which is incompatible.
```

```
apache-beam 2.38.0 requires
```

```
numpy<1.23.0,>=1.14.3, but you have numpy
```

```
1.24.2 which is incompatible.
```

Setting up the Environment for Hive Data Sourcing

This section is applicable if you want to use Hive Data Source.

In the MMG Home directory, a lib folder is available for the Hive specific jars and a conf folder is available for the Kerberos Configuration and Keytab files.

Hive Source Connection Requirements:

MMG_HOME/conf: kbank.keytab and krb5.conf files

MMG_HOME/lib: hive-jdbc-uber-2.6.3.0-235.jar

MMG-Studio/conf: kbank.keytab, krb5.conf and hive-jdbc-driver.jar

Note

The Datastudio placement of jars are for creating a connection from python library and the other is from java, for data sourcing.

Configure the Hive Jars and Configuration Files

For Hadoop version 3.1.1 and hive version 3.1.2, below is the list of jar files that needs to be copied into the `OFS_MMG/lib` location:

zookeeper-3.4.9.jar
woodstox-core-5.0.3.jar
stax2-api-3.1.4.jar
slf4j-log4j12-1.7.25.jar
slf4j-api-1.7.25.jar
re2j-1.1.jar
log4j-1.2.17.jar
libthrift-0.9.3.jar
libfb303-0.9.3.jar
httpcore-4.4.4.jar
httpclient-4.5.2.jar
htrace-core4-4.1.0-incubating.jar
hive-service-3.1.2.jar
hive-metastore-3.1.2.jar
hive-jdbc-3.1.2.jar
hive-exec-3.1.2.jar
hadoop-hdfs-client-3.1.1.jar
hadoop-common-3.1.1.jar

```
hadoop-auth-3.1.1.jar
curator-client-2.12.0.jar
commons-logging-1.0.4.jar
commons-io-2.4.jar
commons-configuration2-2.1.1.jar
commons-collections-3.2.2.jar
commons-cli-1.2.jar
```

The MMG service requires a restart after copying the Hive jars and configuration files. For more information, see the MMG User Guide.

Remote MMG Studio Configuration

For Solaris Operating System, the MMG Studio has to be configured in Linux machine remotely. The MMG Studio URL must be the same as that of the remote studio during MMG Application Installation.

In the `OFS_MMG/bin/config.sh`, update the following properties with the remote server where the MMG Studio will be running:

Copy the `mmg-studio` folder to the remote machine where you want to configure the same.

Navigate to `mmg-studio/bin` and update the `config.sh` file with respect to studio server values. For more details, see the [Configure the config.sh file](#) section.

```
export DATASTUDIO_URL=##DATASTUDIO_URL##
export SSL_KEYSTORE=##SSL_KEYSTORE##
export SSL_KS_SECRET=##SSL_KS_SECRET##
export SSL_KS_TYPE=##SSL_KS_TYPE##
export SSL_KS_ALIAS=##SSL_KS_ALIAS##
```

Note

The keystore must be generated for the remote machine and the path must be present in the remote server.

```
export DS_TNS_ADMIN_PATH=##DS_TNS_ADMIN_PATH##
export DS_WALLET_LOCATION=##DS_WALLET_LOCATION##
```

TNS admin and wallet must be configured in the remote server and the wallet must contain the mmg config schema wallet configurations.

```
export MMG_TNS_ADMIN_PATH=##MMG_TNS_ADMIN_PATH##
export MMG_LIB_WALLET_ALIAS=##MMG_LIB_WALLET_ALIAS##
```

Note

The Self signed certificate needs to be generated and imported to the java keystore. In case self-signed certificate is being used, perform the below step:

- Import MMG studio server certificate to MMG application server java keystore and vice versa.

For more details, see Import Server Certificate to Java Keystore section.

Note

Once the token is generated, ignore '-' character present in the `token.out` file.

PGX Installation

Note

PGX Installation is recommended to be installed in a different server other than the MMG Installation Server.

To install the PGX, follow these steps:

1. Copy the `mmg-pgx.zip` file from MMG Server and copy it to the target server where PGX has to be installed remotely to MMG.
2. Unzip the `mmg-pgx.zip` file.
For Example: `unzip -a mmg-pgx.zip`
The below files will be displayed:
 - `bin`
 - `conf`
 - `pgx-25.4.0`
3. Give 0755 permission to `mmg-pgx` folder.
4. Configure the `config.sh` of `pgx`. For more details, see [Configure the config.sh File of PGX](#) section.
5. Copy the `graph-keystore.p12` from MMG Installation server to `<pgx installation path>/mmg-pgx/conf`. For more details, see [Generate GRAPH-KEYSTORE.P12](#) section.
6. Copy the below key files from `<MMG Installation path>/OFS_MMG/conf` to `<pgx installation path>/mmg-pgx/conf`.
 - `public.key`
 - `private.key`
7. Run the `install.sh` from `<pgx installation path>/mmg-pgx/bin`
8. Update the `pgx-server` URL in `config.sh` for `##PGX_SERVER_URLS##` in the `<MMG Installation path>/bin` and run the `install.sh -u` command and restart the MMG services. For more details, see [Configure the config.sh File of PGX](#) section.

9. Start the Server. For more details, see [Starting PGX Server](#) section.
10. Stop the Server. For more details, see [Stopping PGX Server](#) section.

Configure the config.sh File of PGX

To configure the config.sh file for installing PGX with MMG, follow these steps:

1. Login to the server as a non-root user.
2. Navigate to the <OFS_MMG>/mmg-pgx/bin directory.
3. Configure the applicable config.sh attributes as shown in the following table:

Sample Config.sh file

```
#!/bin/sh

export PGX_PORT=##PGX_PORT##

export PGX_CONTEXT_PATH=##PGX_CONTEXT_PATH##

export PGX_SSL_ENABLED=##PGX_SSL_ENABLED##

export PGX_SSL_KEYSTORE=##PGX_SSL_KEYSTORE##

export PGX_SSL_KS_SECRET=##MMG_SSL_KS_SECRET##

export PGX_SSL_KS_TYPE=## PGX_SSL_KS_TYPE ##

export PGX_SSL_KS_ALIAS=## PGX_SSL_KS_ALIAS##

export GRAPH_SERVICE_URL=## GRAPH_SERVICE_URL##

export GRAPH_KEYSTORE_PASSWORD=## GRAPH_KEYSTORE_PASSWORD##

export LOG_HOME=##LOG_HOME##

export LOG_LEVEL=##LOG_LEVEL##
```

Table 5-2 Config.sh file of PGX

Parameter	Description	Is Mandatory	Comments
##PGX_PORT##	Port on which PGX server needs to be run.	YES	If not set, Port defaults to 7007.
##PGX_CONTEXT_PATH##	Context path of PGX server	YES	If not set, Context path defaults to PGX.

Table 5-2 (Cont.) Config.sh file of PGX

Parameter	Description	Is Mandatory	Comments
##PGX_SSL_ENABLE D##	<p>The values can be true /false.</p> <p>If true, follow the below steps if Self Signed is being used:</p> <ul style="list-style-type: none"> • Import PGX server.cer file to MMG server java keystore • Import MMGserver.cer file to PGX server java keystore <p>For more details, see Import Server Certificate to Java Keystore section.</p>	YES	
Properties if ##PGX_SSL_ENABLED## is set to true.			
##PGX_SSL_KEYSTO RE##	<p>Absolute path for the keystore file.</p> <p>This is applicable only if ##PGX_SSL_ENABLE D## is set to true.</p> <p>NOTE:</p> <p>Run the following command to create a keystore:</p> <pre>keytool -genkey -v -alias demoalias -keyalg RSA -keysize 2048 -keystore server.keystore -validity 3650 -keypass secret -storepass secret -storetype PKCS12</pre>	YES	/conf/server.keystore. Include the file name in the path.
##PGX_SSL_KS_SEC RET##	<p>Value passed in above command for keypass.</p> <p>This is applicable only if ##PGX_SSL_ENABLE D## is set to true.</p>	YES	Keystore password
##PGX_SSL_KS_TYP E##	<p>The type of the PGX keystore.</p> <p>This is applicable only if ##PGX_SSL_ENABLE D## is set to true.</p>	YES	PKCS12
##PGX_SSL_KS_ALIA S##	<p>The Alias of the PGX keystore.</p> <p>This is applicable only if ##PGX_SSL_ENABLE D## is set to true.</p>	YES	password123
Properties for graph service			

Table 5-2 (Cont.) Config.sh file of PGX

Parameter	Description	Is Mandatory	Comments
## GRAPH_SERVICE_URL ##	Graph Service URL. The value is same as ##LOADGRAPH_BASE_URL## in the MMG.config.sh	YES	http(s)://<MMG Host>:<Graph service port>/graph-service
## GRAPH_KEYSTORE_PASSWORD ##	Graph Keystore password. The value is same as ##GRAPH_KEYSTORE_PASSWORD## in the MMG.config.sh	YES	password123
Properties for setting log path			
##LOG_HOME##	A writable folder that stores PGX logs.		/scratch/users/logs
##LOG_LEVEL##			The values can be DEBUG/INFO/WARN

Starting PGX Server

To start the PGX Server, run the following command:

- Navigate to <MMG_INSTALLATION_PATH>/bin directory. `./startup.sh`

You may check `<mmg-pgx/pgx-<pgx-version/bin/nohup.out` to check if the UI service comes up properly.

A message similar to following means a successful startup:

```
INFO: Starting ProtocolHandler ["http-nio-7007"]
```

This will start the successful installation of PGX Server.

Stopping PGX Server

To stop the PGX Server, run the following command:

```
./shutdown.sh
```

A message similar to following means a successful shutdown:

PGX Server shutdown is complete.

R Interpreter

You can configure the R Interpreter support either with ORD-3.6.1 or R 4.1.2.

Installing Oracle R Distribution

<https://docs.oracle.com/en/database/oracle/machine-learning/oml4r/2.0.0/oread/install-oracle-r-distribution-linux.html>

- Check installation:

1. R --version

R 4.1.2 Installation

Note

This setup might update some of the older root level files and using Non-Oracle Yum Repository for getting R rpm files.

To install R 4.1.2, follow these steps:

1. Set Proxy, (pseudo user):
 - a. `curl -O https://dl.fedoraproject.org/pub/epel/epel-release-latest-7.noarch.rpm`
 - b. `yum install epel-release-latest-7.noarch.rpm`
 - c. `curl -O https://cdn.rstudio.com/r/centos-7/pkg/R- $\{R_VERSION\}$ -1-1.x86_64.rpm`
 - d. `sudo yum install R- $\{R_VERSION\}$ -1-1.x86_64.rpm`
 - e. `sudo ln -s /opt/R/ $\{R_VERSION\}$ /bin/R /usr/bin/R`
2. Check installation:
 - a. R --version

MMG Connection Objects Library Setup

This section describes the MMG Connection Objects Library Setup.

For detailed description on installation and installation of Oracle R Enterprise Client libraries (ROracle, and so on), check following link:

https://docs.oracle.com/cd/E83411_01/OREAD/installing-ORE-client.htm#OREAD167

Installing ROracle Library

Prerequisites

DBI is one of the dependencies for using this library.

- **Installing DBI**
 1. `curl -O https://cran.r-project.org/src/contrib/Archive/DBI/DBI_1.1.1.tar.gz`
 2. R CMD INSTALL DBI_1.1.1.tar.gz

Procedure

To install ROracle Library, follow these steps:

- For ORD 3.6.1/R 4.1.2
 1. `curl -O https://cran.r-project.org/src/contrib/ROracle_1.3-1.1.tar.gz`
 2. Install Oracle Instant Client Sdk Package. This is required for additional header files and an example makefile for developing Oracle Applications with Instant Client.
 3. Oracle client lib must be present in PATH. In the .profile file, set PATH to include the appropriate `$ORACLE_HOME/bin` path.

For example:

```
PATH=$JAVA_HOME/bin:$ORACLE_HOME/bin
```

4. R CMD INSTALL --configure-args='--with-oci-lib=<absolute-path-to-oracle-client-lib> --with-oci-inc=<absolute path to instantclient_21_5>/include' ROracle_1.3-1.1.tar.gz

For example:

```
R CMD INSTALL --configure-args='--with-oci-lib=/scratch/users/oracle/app/oracle/product/19.3.0/client_1/lib --with-oci-inc=/scratch/users/oracle/instantclient-sdk/instantclient_21_5/sdk/include' ROracle_1.3-1.1.tar.gz
```

Installing RODBC Library

- **For ORD 3.6.1**
 1. curl -O https://cran.r-project.org/src/contrib/Archive/RODBC/RODBC_1.3-16.tar.gz
 2. R CMD INSTALL RODBC_1.3-16.tar.gz

Note

It needs write permission to `/usr/lib64/R/library` or similar root directory for system installation.

- **For R 4.1.2**
 1. curl -O https://cran.r-project.org/src/contrib/Archive/RODBC/RODBC_1.3-16.tar.gz
 2. R CMD INSTALL RODBC_1.3-16.tar.gz

Note

LD_LIBRARY_PATH should contain path to \$ORACLE_HOME/lib and check that file 'libsqora.so.19.1' exists in \$ORACLE_HOME/lib. Now, set an environment variable named RODBC_DRIVER with value 'libsqora.so.19.1' whichever is present in \$ORACLE_HOME/lib/ directory based on the Oracle Client Version Installation. Now for RODBC Connection to work for Sandbox, check the TNS_ADMIN path set, and then in tnsnames.ora, add the connection string details with alias as Sandbox Name. For example, if Sandbox Name is SAND1 for which the datasource is on host abc.in.oracle.com , port 1234 and service name – ABCXYZ, then in tnsnames.ora file add the following entry-

```
SAND1 =
(DESCRIPTION =
(ADDRESS_LIST =
(ADDRESS = (PROTOCOL =
TCP)(HOST=abc.in.oracle.com)(PORT=1234))
)
(CONNECT_DATA =
(SERVICE_NAME = ABCXYZ)
)
)
```

If this only does not resolve the connections, then configure odbcinst.ini . / odbc.ini files as well as mentioned in Oracle Client Installation and Setup (figured by: > odbcinst -j)

Installing the IRkernel

To configure IRkernel, follow these steps:

1. The IRkernel requires jupyter installed. Create a conda environment with the IRkernel dependencies:

```
conda create -p <PATH TO YOUR CONDA ENV> -y --override-channels -c
<CHANNEL URL> jupyter_client==7.2.2 grpcio protobuf
```

2. Install the IRkernel in R: Open your R REPL (R does not have to be installed with conda) and run:

```
install.packages('IRkernel')
```

3. Softlink jupyter and register IRkernel:

```
ln -s <PATH TO YOUR CONDA ENV> /usr/bin/jupyter && R -e
"IRkernel::installspec(user = FALSE)"
```

Configuring R Interpreter

Make sure to configure the interpreter config and set the correct path for R binary (`zeppelin.R.cmd`) and the path to Python environment which has the IRkernel installed (`zeppelin.python`).

In `config.sh` there is a new parameter:

```
export R_PYTHON_HOME=##R_PYTHON_HOME##
```

This is the Python Conda environment path till `<PATH TO YOUR CONDA ENV>/bin/python` created following steps mentioned in 5.9, which will set the `zeppelin.python` property in `mmg-studio/server/builtin/interpreters/r.json` file.

The other property mentioned for R binary (`zeppelin.R.cmd`) is also set in above path the default value is R so make sure that the user starting the services has access to R and alias is set or change the property according to the path of R binary.

Note

Steps to enable TLS during R Interpreter Installation

Steps to enable TLS during R Interpreter Installation:

1. Download `Rserve_1.8-10.tar.gz` from this link: <https://cran.r-project.org/src/contrib/Archive/Rserve/>
2. Install `openssl-devel` - `[yum install openssl-devel]`
3. Execute below cmd:

```
R CMD INSTALL --configure-args="--with-ssl-headers=/usr/include --with-ssl-libraries=/usr/lib64" Rserve_1.8-10.tar.gz
```

The below steps can be executed from R session to check that Rserve configuration is working before starting the services:

Start R from Terminal/Putty and execute the below commands:

- `library(Rserve)`
- `Rserve(args="--RS-conf <Rserve.conf file location including file name> --no-save")`

Using MMG Studio to Oracle Connection Objects

This section describes the Using MMG Studio to Oracle Connection Objects.

Workspaces

1. `mmg.list_workspaces()`: Used to fetch a vector of all workspaces.
For example: `vec <- mmg.list_workspaces()` `vec` will be vector object
2. `mmg.attach_workspace("workspace_name")`: A method used to set workspace.
Sets a global `mmg_attached_WS` variable with value of `workspace_name`
Sets a `mmg_DS_Vec` Vector Object with name and order of all datasources for attached workspace.

Sets a `mmg_WL_Vec` Vector Object with name and wallet of all datasources for attached workspace.

For example:

```
mmg.attach_workspace("SB1")
```

Connections

Following is the list of datasources related to workspace using:

- `mmg.list_datasources("SB1", 1)`: will list datasources related to SB1 workspace with order 1 as passed in second argument
`mmg.list_datasources("workspace_name", order)` order is integer for specific order or null for all datasources.

For example:

```
df <- mmg.list_datasources("workspace_name",order) df will be Data.Frame Object.
```

From the datasource name or order for the attached workspace, we can get the **ROracle** or **RODBC** Connection Object.

- `mmg.get_connection()`:
datasource_name is the string name of the datasource, order is integer, library is one of **"RODBC"** or **"ROracle"**

```
conn <- mmg.get_connection(datasource=order,conn_type="library");
```

```
conn <- mmg.get_connection(datasource="datasource_name",conn_type="library");
```

```
conn <- mmg.get_connection(datasource="datasource_name","library");
```

```
conn <- mmg.get_connection(datasource=order,"library");
```

```
conn <- mmg.get_connection("datasource_name",conn_type="library");
```

```
conn <- mmg.get_connection(order,conn_type="library");
```

```
conn <- mmg.get_connection("datasource_name","library");
```

```
conn <- mmg.get_connection(order,"library");
```

sets the conn variable to connection object of relevant library

Multi Level Approval

Model Pipeline deployment process by default requires one level of approval for every stage including model pipeline acceptance, promotion to production, and so on.

The requestor is allowed to select Reviewer and Approver user groups. All the user groups with MDLREVIEW function mapped to them are displayed in the Reviewers selector field.

Similarly, the user groups with the MDLAPPROVE function mapped to them are displayed in the Approvers selector field. Applicable Pending requests are shown in the Reviewer/Approver tabs.

To add multi level approvers or reviewers, perform the following:

1. Navigate to `<installation directory>/MMG/OFMMG/conf/workflow/model-pipeline/default.yml`

Following are the default values:

workflow:

workflow-name: Default Workflow

```

num-approver-levels: 1
levels:
- level: 1
  approvers:
  escalation-approvers:
  escalation-trigger-time: 0
lock-approver-selection: false
enable-approver-notification: true

```

2. Modify the approver levels based on your requirements as shown below.

Figure 5-1 Multi level approval

```

workflow:
  workflow-name: Default Workflow
  num-approver-levels: 2
  levels:
    - level: 1
      approvers: APPROVER1
      escalation-approvers: MDLAPPR
    - level: 2
      approvers: APPROVER2
      escalation-approvers: MDLAPPR
  escalation-trigger-time: 12
  enable-approver-notification: true
  lock-approver-selection: true

```

Kafka Installation

Windows

Apache Zookeeper (Download the bin tar):

<https://shaaslam.medium.com/installing-apache-zookeeper-on-windows-45eda303e835#.fgofwm6n6>

Apache Kafka:

<https://shaaslam.medium.com/installing-apache-kafka-on-windows-495f6f2fd3c8>

Linux

Method 1(Using separate zookeeper)

Apache Zookeeper

1. Download Apache Zookeeper bin files from <https://www.apache.org/dyn/closer.lua/zookeeper/zookeeper-3.7.1/apache-zookeeper-3.7.1-bin.tar.gz>
2. Untar apache-zookeeper-3.7.1-bin.tar.gz tar -zxvf apache-zookeeper-3.7.1-bin.tar.gz
3. In conf folder, rename zoo-sample.cfg to zoo.cfg

4. Make a folder named `data` in `/scratch/users/ofsa/zookeeper/apache-zookeeper-3.7.1-bin`
5. Change the value of `dataDir` in `zoo.cfg` to `dataDir=/scratch/users/ofsa/zookeeper/apache-zookeeper-3.7.1-bin/data`
6. Open a terminal and set the below values:

```
export ZOOKEEPER_HOME=/scratch/users/ofsa/zookeeper/apache-zookeeper-3.7.1-bin  
  
export PATH=/scratch/users/ofsa/zookeeper/apache-zookeeper-3.7.1-bin/bin:$PATH
```
7. Start the zookeeper server:

```
cd /scratch/users/ofsa/zookeeper/apache-zookeeper-3.7.1-bin/bin ./zkServer.sh start
```

A few commands for zookeeper server:

- `./zkServer.sh start`
- `./zkServer.sh start-foreground`
- `./zkServer.sh stop`
- `./zkServer.sh status`

Apache Kafka

- Download Apache Kafka bin files

```
wget https://downloads.apache.org/kafka/3.3.1/kafka_2.13-3.2.0.tgz
```
- Untar `kafka_2.13-3.2.0.tgz`

```
tar -zxvf kafka_2.13-3.2.0.tgz
```
- Make a folder "logs" in the directory `/scratch/users/ofsa/kafka/kafka_2.13-3.2.0/`.
- Go to config folder in Apache Kafka and edit `server.properties` using any text editor. Change value of `logs.dir` to `log.dirs=/scratch/users/ofsa/kafka/kafka_2.13-3.2.0/logs` in `server.properties`
- Go to config folder in Apache Kafka and edit `zookeeper.properties` using any text editor. Change value of `dataDir` `dataDir=/scratch/users/ofsa/zookeeper/apache-zookeeper-3.7.1-bin/data`
- Start Apache Kafka broker

```
cd /scratch/users/ofsa/kafka/kafka_2.13-3.2.0/bin/  
./kafka-server-start.sh ../config/server.properties
```

Method 2(Using zookeeper shipped with Apache Kafka)

Apache Zookeeper and Kafka

- Download Apache Kafka bin files

```
wget https://downloads.apache.org/kafka/3.3.1/kafka_2.13-3.2.0.tgz
```
- Untar `kafka_2.13-3.2.0.tgz`

```
tar -zxvf kafka_2.13-3.2.0.tgz
```
- Go to config folder in Apache Kafka and edit `zookeeper.properties` using any text editor. Change value of `dataDir` to `dataDir=/scratch/users/ofsa/zookeeper/apache-zookeeper-3.7.1-bin/data` or any folder where the snapshot of zookeeper metadata can be stored.
- Make a folder "logs" in the directory `/scratch/users/ofsa/kafka/kafka_2.13-3.2.0/`.

- Go to config folder in Apache Kafka and edit `server.properties` using any text editor. Change value of `logs.dir` to `log.dirs=/scratch/users/ofsa/kafka/kafka_2.13-3.2.0/logs` in `server.properties`.
- **Start Apache Zookeeper**

```
cd /scratch/users/ofsa/kafka/kafka/kafka_2.13-3.2.0
bin/zookeeper-server-start.sh config/zookeeper.properties
```
- **Start Apache Kafka Broker**

```
cd /scratch/users/ofsa/kafka/kafka_2.13-3.2.0
bin/kafka-server-start.sh /config/server.properties
```

Create Keys and Certificates

- `keytool -keystore kafka.server.keystore.jks -alias localhost -keyalg RSA -validity 365 -genkey -storepass oracle123 -keypass oracle123 -ext SAN=DNS:ofss-mum-1035.snбомprsharedl.gbucdsint02bom.oraclevcn.com`
- `openssl req -new -x509 -keyout ca-key -out ca-cert -days 365`
- `keytool -keystore kafka.client.truststore.jks -alias CARoot -storepass oracle123 -keypass oracle123 -importcert -file ca-cert keytool -keystore kafka.server.truststore.jks -alias CARoot -storepass oracle123 -keypass oracle123 -importcert -file ca-cert`
- `keytool -keystore kafka.server.keystore.jks -alias localhost -storepass oracle123 -keypass oracle123 -certreq -file cert-file`
- `openssl x509 -req -CA ca-cert -CAkey ca-key -in cert-file -out cert-signed -days 365 -CAcreateserial -passin pass:oracle123`
- `keytool -keystore kafka.server.keystore.jks -alias CARoot -storepass oracle123 -keypass oracle123 -importcert -file ca-cert keytool -keystore kafka.server.keystore.jks -alias localhost -storepass oracle123 -keypass oracle123 -importcert -file cert-signed`

Converting Keystore file from jks to pem

- `keytool -exportcert -alias localhost -keystore kafka.server.keystore.jks -rfc -file certificate.pem -storepass oracle123`
- `keytool -v -importkeystore -srckeystore kafka.server.keystore.jks -srcalias localhost -keystore cert_and_key.p12 -storetype PKCS12 -storepass oracle123 -srcstorepass oracle123`
- `openssl pkcs12 -in cert_and_key.p12 -nodes -nocerts -out key.pem -passin pass:oracle123`
- `keytool -exportcert -alias CARoot -keystore kafka.server.keystore.jks -rfc -file CARoot.pem -storepass oracle123`

Inside the Kafka/config path we have to create `client-ssl.properties` and `server-ssl.properties`.

The `client-ssl.properties` file contains the following:

- `security.protocol=SSL`
- `ssl.truststore.location=/scratch/mmg8133/kafka/ssl/kafka.server.truststore.jks`
- `ssl.truststore.password=oracle123`
- `ssl.keystore.location=/scratch/mmg8133/kafka/ssl/kafka.server.keystore.jks`
- `ssl.keystore.password=oracle123`

- `ssl.key.password=oracle123`

`server-ssl.properties` contains the same content as `server.properties`, but we have to update the ssl parameters in it.

Configuring Interpreters

This section provides information on configuring interpreters.

Spark Interpreter

Note

Java 21 supports the Spark3.4+ version, excluding the 4.0.0 series.

Spark Configuration and Execution in Python

The following sections provide information on the Spark configurations and executions in Python.

Set the Hadoop Clusters

Configure `$ORACLE_HOME`, `$HADOOP_HOME` to validate the installation directories.

1. Copy the following required Oracle JDBC/security JARS to HDFS.
2. Execute the following commands that need to be run on the Hadoop cluster:
 - `$HADOOP_HOME/hdfs dfs -mkdir -p /spark/jars/`
 - `$HADOOP_HOME/bin/hdfs dfs -put $ORACLE_HOME/lib/ojdbc8.jar /spark/jars/`
 - `$HADOOP_HOME/bin/hdfs dfs -put $ORACLE_HOME/jlib/oraclepki.jar /spark/jars/`
 - `$HADOOP_HOME/bin/hdfs dfs -put $ORACLE_HOME/jlib/osdt_core.jar /spark/jars/`
 - `$HADOOP_HOME/bin/hdfs dfs -put $ORACLE_HOME/jlib/osdt_cert.jar /spark/jars/`
3. Verify that the jars are copied by executing the following command:
`hdfs dfs -ls /spark/jars`

Configuration on the OFS MMG Instance Server

Perform the following steps to complete the configurations on the OFS MMG instance server.

1. Create a local folder on the OFS MMG install server, for example, `hive_conf_dir`:
 - `/scratch/ofsaapp/spark-lib/hive_conf_dir/yarn-site.xml` (suggested some edits now to make the code work)
 - `/scratch/ofsaapp/spark-lib/hive_conf_dir/mapred-site.xml`
 - `/scratch/ofsaapp/spark-lib/hive_conf_dir/hdfs-site.xml`
 - `/scratch/ofsaapp/spark-lib/hive_conf_dir/core-site.xml`

- /scratch/ofsaapp/spark-lib/hive_conf_dir/hive-site.xml
 - /scratch/ofsaapp/spark-lib/hive_conf_dir/kbank.keytab
 - /scratch/ofsaapp/spark-lib/hive_conf_dir/krb5.conf
2. Configure the `yarn-site.xml` file with the following property:
- ```
<property>
<name>yarn.nodemanager.keytab</name>
<value>"path to keytab"/<keytabfile>.keytab</value>
</property>
<property>
<name>yarn.resourcemanager.address</name>
<value>"cluster IP/hostname":8032</value>
</property>
<property>
<name>yarn.resourcemanager.scheduler.address</name>
<value>"cluster IP/hostname":8030</value>
</property>
<property>
<name>yarn.resourcemanager.resource-tracker.address</name>
<value>"cluster IP/hostname":8031</value>
</property>
```

**Note**

Ensure that the Hadoop cluster and the OFS MMG instance are configured to run on the same Java version.

## Set Apache Spark in the OFS MMG Installed Server

Perform the following steps to set Apache Spark in the OFS MMG installed server:

1. Download Apache Spark from the Apache site and copy it to the OFS MMG installed server:  
`https://archive.apache.org/dist/spark/spark-3.5.0/spark-3.5.0-bin-hadoop3.tgz`
2. Unzip the downloaded file by executing the following command:  
`gunzip spark-3.5.0-bin-hadoop3.tgz`
3. Untar the file with the relevant command.
4. Restart the OFS MMG services after placing the configs and installing Spark.

## Code Snippet to Create the Spark Dataframe and Trigger Executions in to Spark Cluster (with PySpark)

You must perform the following steps to create the Spark Dataframe and trigger the executions in the Spark cluster with PySpark

1. Log in to the OFS MMG application
2. Navigate to the **Notebook** tab of the Model pipeline.
3. Create and execute following paragraphs:
  - a. [Environment Configuration](#)
  - b. [Connection](#)
  - c. [Spark Session](#)
  - d. [Sample Query](#)

## Environment Configuration

```
%python

import sys, os

jdk_path = "/usr/java/jdk1.8.0_401" # Hadoop supports Java 1.8 and Java 11. Refer
matrix for actual versions. Both cluster and client must be in same version

spark_path = "<Path of spark installed location in MMG Server>" # This is
spark3.5.5 + hadoop3.

Ensure that spark version from the above matches with the pyspark installed in
this python runtime.

Also ensure that hadoop version from the above matches with the hadoop version
of cluster

hadoop_conf_dir = "<Path to Hadoop xml directory which is copied local to MMG
Server>" # Local Path containing hadoop XMLs. Ensure that yarn-site has the
correct addresses for resource manager.

krb5_conf = "<Path_To_krb5.conf>krb5.conf" # Conf file for hive connectivity

default_service_principal = "<service>/<fully-qualified-
hostname>@<KERBEROS_REALM>" # Service Principal, not the user. Needed while doing
impersonation.

default_keytab_file = "<Path_To_Keytab file copied local to the MMG server>" #
Keytab file for initializing connection

default_user_principal = "<service>/<fully-qualified-hostname>@<KERBEROS_REALM>"

"""Setup environment variables for Spark and Hadoop."""

os.environ["JAVA_HOME"] = jdk_path

os.environ["SPARK_HOME"] = spark_path

os.environ["PYSPARK_PYTHON"] = sys.executable

os.environ["PYSPARK_DRIVER_PYTHON"] = sys.executable

os.environ["KRB5_CONFIG"] = krb5_conf

os.environ["HADOOP_CONF_DIR"] = hadoop_conf_dir

os.environ["YARN_CONF_DIR"] = hadoop_conf_dir

os.environ["PATH"] = f"{jdk_path}/bin:{spark_path}/bin:" + os.environ["PATH"]
```

```
os.environ["SPARK_SUBMIT_OPTS"] = f"-Djava.security.krb5.conf={krb5_conf}" # If
we still get "KrbException: Cannot locate default realm", then this property
needs to be added in .profile

print("Environment Configured")
```

## Connection

```
%python

from pyspark.sql import SparkSession

def get_yarn_connection(conn_type='kerberos',
user_principal=default_user_principal, keytab_file=default_keytab_file,
extraConfigs=None, hive_support=False):

 extraConfigs = extraConfigs or {}

 if not isinstance(extraConfigs, dict):
 raise TypeError("extraConfigs must be a dict")

 if conn_type.lower() == 'kerberos':
 builder = (
 SparkSession.builder
 .appName("MMGYarnKerberos")
 .master("yarn")
 .config("spark.submit.deployMode", "client")
 .config("spark.kerberos.principal", user_principal)
 .config("spark.kerberos.keytab", keytab_file)
)

 elif conn_type.lower() == 'impersonation':
 builder = (
 SparkSession.builder
 .appName("MMGYarnImpersonate")
 .master("yarn")
 .config("spark.submit.deployMode", "client")
 .config("spark.sql.hive.thriftServer.singleSession", "true")
 .config("spark.hadoop.hive.server2.proxy.user", user_principal) # Proxy/
 Impersonated user. Ensure proxy login is enabled in HIVE.
 .config("spark.hadoop.hive.metastore.kerberos.principal",
 default_service_principal) # Service principal
 .config("spark.hadoop.hive.metastore.kerberos.keytab.file", keytab_file) # Should
 be the keytab of service principal, not the user
 .config("spark.hadoop.hive.metastore.sasl.enabled", "true")
```

```
.config("spark.sql.catalogImplementation", "hive")
)
else:
 raise ValueError(f"Unsupported connection mode {conn_type} to get YARN
connection.")
for k, v in extraConfigs.items():
 builder = builder.config(k, v)
 if hive_support:
 builder = builder.enableHiveSupport()
 spark = builder.getOrCreate()
return spark
```

## Spark Session

```
%python
spark = get_yarn_connection(conn_type='kerberos')
sc = spark.sparkContext
print("Spark app name:", sc.appName)
print("Spark app ID:", sc.applicationId)
print("Spark master :", sc.master)
print("Local Spark URL :", sc.uiWebUrl)
```

## Sample Query

```
%python
spark.sql("show databases").show()
spark.sql("SHOW TABLES IN default").show()
```

### Note

The example above uses Spark's Hive support (Metastore).

# Interpreter Configuration

## For JDBC

Update the below property in `jdbc.json` under `OFS_MMG/mmg-studio/server/builtin/interpreters`

```
"propertyName": "default.url"
"defaultValue": "<JDBC_URL>"
```

**For example:** jdbc:oracle:thin:@ofss-mum-1033.snbomprshared1.gbucdsint02bom.oraclevcn.com:15 21/MMG19PDB

"propertyName": "default.user",

"defaultValue": "<schameusername>"

**For example:** The schema user to which you want to connect, for example: datastudio schema name,

"propertyName": "default.password",

"defaultValue": "<schemapassword>"

**For example:** Password of the provided schema user.

Start the jdbc interpreter by executing below command under //OFS\_MMG/mmg-studio/interpreter-server/jdbc-interpreter-22.4.3/bin ./

```
jdbc-interpreter
```

If the jdbc interpreter needs to be included in the datastudio startup script remove the below entry from /OFS\_MMG/mmg-studio/bin/startup.sh --jdbc -1.

### For Spark

Configuration with Kerberos enabled remote spark cluster:

1. Copy the configured Spark directory from hadoop cluster to <MMG Studio>/interpreter-server/spark-interpreter/extralibs. For example: spark-2.4.8-bin-hadoop2.7
2. Copy the below files to the <MMG Studio>/interpreter-server/spark-interpreter/extralibs krb5.conf <keytabfile>.keytab
3. To run Spark in yarn-client mode, configure the following parameters in this file OFS\_MMG/mmg-studio/server/builtin/interpreters/spark.json  
spark.master = yarn-client  
spark.driver.bindAddress = 0.0.0.0  
spark.driver.host = <host> -> Apache Spark host

#### Note

When using the Kubernetes interpreter lifecycle, <host> can be the IP address or hostname of any node in your Kubernetes cluster. When using the Host interpreter lifecycle, <host> should be the IP address or hostname of the node that runs the Spark interpreter.

#### Note

When connecting to a YARN cluster, the Spark driver authenticates as the UNIX user that runs the Spark interpreter. You can set the HADOOP\_USER\_NAME environment variable to make the Spark driver authenticate as a different user. If you use the Host interpreter lifecycle, then you can do this by exporting the HADOOP\_USER\_NAME environment variable before starting the Spark interpreter process. If you use the Kubernetes interpreter lifecycle, then you can do this by setting the HADOOP\_USER\_NAME environment variable in the resource manifest (spark.yml).

4. Update file spark-defaults.conf keytab location to the location where <keytabfile>.keytab file is copied
5. Update file spark-env.sh with the krb5.conf location to the location where krb5.conf file is copied.  
For example: `Djava.security.krb5.conf=/OFS_MMG/mmg-studio/interpreter-server/spark-inte rpreter-22.4.2/extralibs/krb5.conf"`.

# 6

## Post-installation Steps


On successful installation of the application, refer to the below topics for post-installation procedures.

### Access the Application

To access the application, follow these steps:

- Open a browser and enter the URL in the following format:

**Figure 6-1 Login window – AAI Authentication**

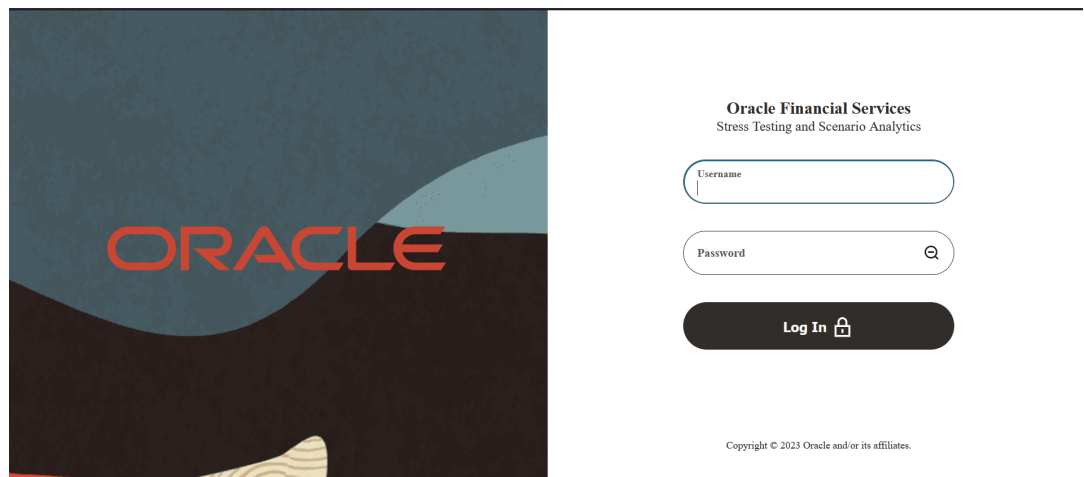

For more information, see the [User Access and Permissioning Management](#) section.

### Create Application Users

Create the application users in the setup before starting to use the application. For more information, see the [User Access and Permissioning Management](#) section.

### Map Application User(s) to User Group

User Groups seeded with the OFS MMG Application Pack are listed in the Seeded User Groups table.

**Note**

Run the following scripts manually for the user user-group mapping/unmapping in OFS AAI:

The following two flags must be added in the configuration table of the config schema:

```
MERGE INTO CONFIGURATION a USING (SELECT 1 FROM DUAL) b ON (a.PARAMNAME=
'ENB_CSTM_GRP') WHEN NOT MATCHED THEN INSERT (a.PARAMNAME,
a.PARAMVALUE,a.DESCRPTION) VALUES ('ENB_CSTM_GRP','true','Enable custom
group creation during JIT')
```

/

```
MERGE INTO CONFIGURATION a USING (SELECT 1 FROM DUAL) b ON (a.PARAMNAME=
'ENB_GRP_SYNC') WHEN NOT MATCHED THEN INSERT (a.PARAMNAME,
a.PARAMVALUE,a.DESCRPTION) VALUES ('ENB_GRP_SYNC','true','Enable
unmapping operation during JIT')
```

/

Two new flags are introduced in configuration table:

- **ENB\_CSTM\_GRP** - If this flag is set as *true*, then custom groups can be created. If this flag is set as *false*, then the user will not be able to create custom groups and assign it to the user.
- **ENB\_GRP\_SYNC** - If this flag is set as *true*, then the unmapping of users and groups are enabled. If this flag is set as *false*, then the user will not be able to unmap groups and users.

Based on these flags, unmapping of users with groups on user login is enabled.

**Table 6-1 Seeded User Groups**

User Group Name	User Group Description
MDLREV	The Modeling Reviewer Group. Users mapped to this group have access to the menu items in the OFS MMG Application that are related to model review activities.
MDLAPPR	The Modeling Approver Group. Users mapped to this group have the rights to approve models created by the users.
MDLBATCHUSR	The Modeling Batch User. Scheduler can use this Group for executing batches.
WKSPADMIN	The Workspace Administrator Group. Users mapped to this group have access to all the menu items in the OFS MMG Application. Additionally, they have authorization rights to create and populate workspaces.
MDLUSR	The Modeling User Group. Users mapped to this group have access to all the menu items in the OFS MMG Application that is related to model creation.

Table 6-1 (Cont.) Seeded User Groups

User Group Name	User Group Description
DSUSRGRP	General Role Users mapped to this group have permission to access/modify MMG Studio Interpreter Configurations.
DSREDACTGRP	Roles for applying redaction in graph. This group will be applicable to only those users for whom graph redaction is required.
OBJMIGADMIN	Users mapped to this group have access to Object Migration links and UI to perform import or export of objects. The following roles are mapped to this group and enables view/edit/delete of the import/export UIs and its definitions in the MMG UI: <ul style="list-style-type: none"> <li>• OMEXADVND</li> <li>• OMEXPHTM</li> <li>• OMEXREAD</li> <li>• OMEXWRITE</li> <li>• OMIMADVND</li> <li>• OMIMPHTM</li> <li>• OMIMREAD</li> <li>• OMIMWRITE</li> </ul>
GRPADMIN	The Graph Administrator Group. Users mapped to this group have access to all the menu items in the OFS MMG Application related to graph and Pipeline/Refresh graphs related health services.
GRPUSR	The Graph User Group. Users mapped to this group have access to all the menu items in the OFS MMG Application related to graph and Pipeline/Refresh graphs related health services.

**Note**

Admin link in the application home page is accessible only if the below seeded groups are mapped to the user:

- IDNTYADMN
- IDNTYAUTH

## User Access and Permissioning Management

The application uses a realm based on unique authentication and authorization for its users. Realm indicates the functional grouping of Database Schemas and roles that must be secured for an application.


Realms protect data from access through system privileges and do not provide its owner or participants additional privileges. Realm based authorization establishes a set of database

accounts and roles that can manage, or access objects protected in realms and are authorized to use its system privileges. It provides a runtime mechanism to check logically if a user's command can access objects specified in the command and proceed with its execution. Realms (AAIRealm, SAMLRealm) are selected based on the Identity Provider (IDP) during the installation. For more information, see the OFS MMG Installation Guide. After you select the realms, you can register a set of schema objects or roles (secured objects) for realm protection and authorize a set of users or roles to access the secured objects. The Application is accessed using the following realms that you have selected during the installation of the Application:

- **AAIRealm:** This uses Oracle Financial Services Analytical Applications Infrastructure (OFSAAI) Identity Management System for User Authentication. Users, Roles, and Groups are created in the OFSAAI. The OFSAAI facilitates System Administrators to provide access, monitor, and administer users along with the infrastructure metadata operations. The required permissions to roles or groups are authorized in the application by using the Permission feature.
- **SAMLRealm:** The SAMLRealm uses an identity provider (IDP) Identity Management System for User Authentication. Security Assertion Markup Language (SAML) is an open standard that allows Identity Providers (IDP) to pass authorization credentials to Service Providers (SP). IDP acts as the Single Sign-On (SSO) service. Users and Roles are created in the IDP. The required permissions to Users and Roles are authorized in the application by using the Permission feature.

The following image illustrates the authentication and authorization process in the application.

**Figure 6-2 Authentication and Authorization process in the application**

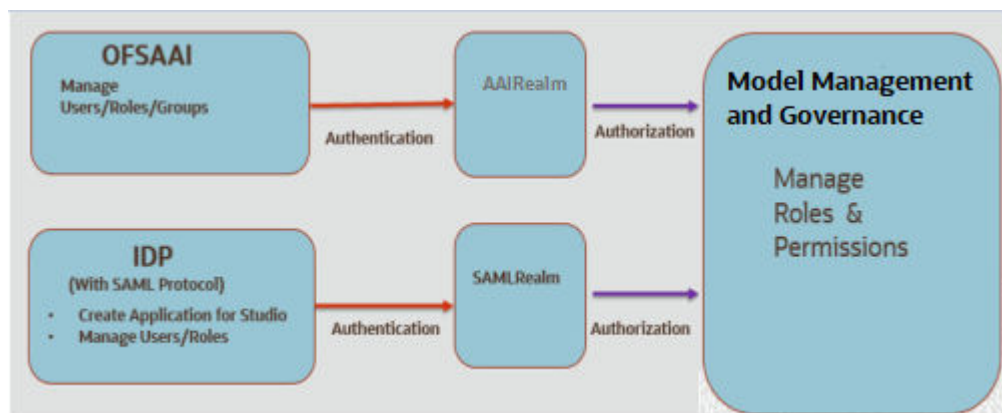

## Mapping User Groups

Users must be mapped to User Groups that are mapped to access the application. The following subsections provide information about the user groups and roles required in addition to the information about configuring the user groups.

## User Groups

**Table 6-2 User Groups**

User Group	Description
IDNTYADMN	Identity Administrator group
IDNTYAUTH	Identity Authorizer group
MDLREV	The Modeling Reviewer Group. Users mapped to this group have access to the menu items in the application that are related to model review activities
MDLAPPR	The Modeling Approver Group. Users mapped to this group have the rights to approve models created by the users.
MDLBATCHUSR	The Modeling Batch User. Scheduler can use this Group for executing batches.
WKSPADMIN	The Workspace Administrator Group. Users mapped to this group have access to create and populate workspaces. For viewing the landing page this group is required.
MDLUSR	The Modeling User Group. Users mapped to this group have access to all the menu items in the application that is related to model creation.
DSUSRGRP	Data Studio User Group This User Group provide access to modify Interpreter configurations.
GRPADMIN	The Graph Administrator Group Users mapped to this group have access to all the menu items in the application related to graph as well as Pipeline/Refresh graphs related health services.
GRPUSR	The Graph User Group Users mapped to this group have access to all the menu items in the application related to graph as well as Pipeline/Refresh graphs related health services.
DSREDACTGRP	Roles for applying redaction in graph. This group will be applicable to only those users for whom graph redaction is required. <b>Note:</b> This group has to be created manually in AAI and map it to the users.
FILEADMINUSER	User Group for admin level access to files
FILEREADUSER	User Group for read access to files
FILEWRITEUSER	User Group for read and write access to files

**Note**

- At the first-time login, User Group mappings are initialized from AAI/IDCS for the newly provisioned users. These will be reflected in Admin Console in the next login.
- If User Group mappings are deleted in AAI/IDCS, it would not delete in the Admin Console. Admin needs to delete this in the Identity screens too.
- Only the group with MDLSUMM role will be displayed in the Workspace provisioning steps.  
MDLSUMM function is mapped to the MDLACCESS role.

## User Group - Role Mapping

Map the user groups in the application to the roles in the following table to enable access to the OFS CS application.

**Table 6-3 User Group to Role Mapping**

Group Name	Role Name
DSREDACTGRP	DSREDACT
IDNTYADMN	Batch Advance Role
IDNTYADMN	Batch Write Role
IDNTYADMN	Admin Link Role
IDNTYADMN	User Advanced Role
IDNTYADMN	Group Advanced Role
IDNTYADMN	Role Advanced Role
IDNTYADMN	Function Advanced Role
IDNTYAUTH	Group Authorize Role
IDNTYAUTH	User Authorize Role
IDNTYAUTH	Group Read Role
IDNTYAUTH	Admin Link Role
IDNTYAUTH	Function Read Role
IDNTYAUTH	Role Read Role
IDNTYAUTH	Role Authorize Role
MDLAPPR	DSINTER
MDLAPPR	Model Authorize
MDLAPPR	Model Deployment
MDLAPPR	Workspace Read
MDLAPPR	Model Read
MDLAPPR	Model Access
MDLAPPR	Workspace Access
MDLAPPR	DSAPPROVER
MDLBATCHUSR	DSBATCH
MDLREV	Workspace Read
MDLREV	Model Review
MDLREV	Model Access

**Table 6-3 (Cont.) User Group to Role Mapping**

Group Name	Role Name
MDLREV	Workspace Access
MDLREV	DSUSER
MDLREV	Model Read
MDLUSR	Model Advanced
MDLUSR	Model Write
MDLUSR	Model Read
MDLUSR	Batch Advance Role
MDLUSR	Model Execute
MDLUSR	DSUSER
MDLUSR	Model Access
MDLUSR	Workspace Access
MDLUSR	Workspace Read
MDLUSR	Datastore Access
MDLUSR	Datastore Write
MDLUSR	Datastore Read
WKSPADMIN	Workspace Access
WKSPADMIN	DSADMIN
WKSPADMIN	Identity MGMT advanced
WKSPADMIN	Workspace Authorize
WKSPADMIN	Workspace Read
WKSPADMIN	Workspace Write
DSUSRGRP	DSADMIN
GRAPHUSER	Graph Administrator
GRAPHUSER	Graph Read Role
GRAPHUSER	Graph Read Role
GRAPHUSER	Graph Execute Role
GRAPHADMINISTRATOR	Graph Administrator Role

## Functions and Roles required to perform CRUD operations for Conda

The following table provides details about the Functions and Roles required to perform CRUD operations for Conda in the application.

**Table 6-4 Functions and Roles**

Function	Role	Groups Mapped	Access
CONDAENVSUMM	CONDAENVACCESS	<ul style="list-style-type: none"> <li>• MDLUSR</li> <li>• MDLREV</li> <li>• MDLAPPR</li> </ul>	Summary view
CONDAENVVIEW	CONDAENVREAD	<ul style="list-style-type: none"> <li>• MDLUSR</li> <li>• MDLREV</li> <li>• MDLAPPR</li> </ul>	Read

**Table 6-4 (Cont.) Functions and Roles**

Function	Role	Groups Mapped	Access
CONDAENVEXP	CONDAENVREAD	<ul style="list-style-type: none"> <li>• MDLUSR</li> <li>• MDLREV</li> <li>• MDLAPPR</li> </ul>	Export yml file
CONDAENVEXP	CONDAENVWRITE	<ul style="list-style-type: none"> <li>• MDLREV</li> <li>• MDLAPPR</li> </ul>	Export yml file
CONDAENVDEL	CONDAENVWRITE	<ul style="list-style-type: none"> <li>• MDLREV</li> <li>• MDLAPPR</li> </ul>	Delete a registered conda environment
CONDAENVEDIT	CONDAENVWRITE	<ul style="list-style-type: none"> <li>• MDLREV</li> <li>• MDLAPPR</li> </ul>	Edit a conda environment
CONDAENVADD	CONDAENVWRITE	<ul style="list-style-type: none"> <li>• MDLREV</li> <li>• MDLAPPR</li> </ul>	Add a conda environment

## Access MMG using AAI Realm

This section provides information on creating users who can access MMG using the AAI Realm method of authentication through Oracle Financial Services Analytical Applications Infrastructure (OFSAAI). The users with SYSADMN and SYSAUTH roles in OFSAAI can create and authorize users, respectively.

Identity Management in the OFSAAI facilitates System Administrators to provide access, monitor, and administer users along with the infrastructure metadata operations. The Security Management System (SMS) component is incorporated with Password Encryption, Single Logon, Role and DataBased Security, Access Control, and Audit Trail feature to provide a highly flexible security envelope. Administrators can create, map, and authorize users defining a security framework that can restrict access to the data and meta-data in the warehouse, based on a fine-grained access control mechanism. These activities are done at the initial stage and then on a required basis. For more information on creating and authorizing users in OFSAAI, see the Oracle Financial Services Analytical Applications Infrastructure User Guide. The following table describes the ready-to-use roles and the corresponding user groups who can access MMG using AAIRealm.

### Note

Only in AAIRealm, users are mapped to user groups. The default permissions mapped to these users and user groups are available in the Permission section. However, these permissions can be added or modified.

## Prerequisites

### 1. Configuring WebLogic for REST Services Authorization.

To enable REST API authorization by OFSAA in WebLogic server, perform the following steps:

- a. Open the config.xml file located in the domain where OFSAA is deployed that is:  
<domain\_home>/config/config.xml.
- b. Add the following in the security-configuration tag:

```
<enforce-valid-basic-auth-credentials>>false</enforce-valid-basic-
authcredentials>.
```

2. In OFSAA Application, **Allow user to log in from multiple machines** option should be enabled.

### REST API Calls

There is need for Model Scripts to access input parameters passed by REST API Calls:

- a. The REST API optional parameters are mapped to runtime parameters , this mapping needs to be documented. It is not apparent from runtime parameter section.
- b. The mapped simple params can be accessed with script segment like below , but it is not supporting base64 encoding and/or json hp = '\${hyperparams}' cnf = '\${cnf}' 3.the enhancement against json is retracted as we can do base64 encrypted value passing

```
{
 "RUN_ID": 2,
 "RUN_CODE": 200440,
 "PARAM_SET": {
 "CALL_TYPE": "PASS_THROUGH_RATE",
 "BOLLINGER_PERIOD": 3,
 "BOLLINGER_COEFFICIENT": 1,
 "DATA_SNAP_FREQ": 1,
 "DATA_SNAP_FREQ_MULTIPLIER": "D",
 "MISSING_VALUE_TECH": "inpol",
 "MISSING_THRESHOLD_PERCENTAGE": 30,
 "START_DATE": 20230131,
 "END_DATE": 20230431,
 "EXECUTED_BY": "TESTUSR",
 "REFRESH_DATA": "Yes"
 },
 "SLICE": [
 {
 "SEQ": 1,
 "LOGICAL_PARTITION_NAME": "DEFAULT",
 "TABLE_NAME": "FSI_I_NM_MLSTAGE"
 }
],
 "OUTPUT_DATA": {
 "PLOTS_TAB": "FSI_O_NM_PLOTS",
 "MILESTONE_TAB": "FSI_O_NM_MILESTONE",
 "SCORE_TAB": "FSI_O_NM_MODEL"
 }
}
```

}

**For example:** base64 encryption

## Access MMG using SAML Realm

This section provides information on managing users who can access MMG with Identity Provider (IdP or IDP). An Identity Provider (IdP) is a service that stores and verifies user identity. IdPs are cloud-hosted services, and they often work with single sign-on (SSO) providers to authenticate users. An Identity Provider stores and manages users' digital identities. An IdP checks user identities via username-password combinations and other factors, or it may simply provide a list of user identities that another Service Provider (like an SSO) checks. The following are the ready-to-use roles that can access MMG using SAML Realm. To integrate MMG with IdP as the SSO Provider, follow these steps:

### **Note**

When SAML Realm is used and `aai.enable.fetchgroups=true`, then OFS MMG authenticates the user through the SAML Identity Provider (for example, IDCS) and fetches the user's group memberships from AAI (OFSAA). In this configuration, each user must be explicitly assigned or mapped to the SAML application in the Identity Provider, group membership alone is not enough for accessing the application.

If a user is not mapped to the SAML application, the SAML login may succeed but the user will not be authorized to access OFS MMG.

1. Create the following roles in the IDP System:

For MMG:

- IDNTYADMN
- IDNTYAUTH
- MDLREV
- MDLAPPR
- MDLBATCHUSR
- WKSPADMIN
- MDLUSR
- DSUSRGRP
- DSREDACTGRP
- GRPADMIN
- GRPUSR

### **Note**

IDNTYADMN role is required only if you need the Admin Access.

2. Map the user groups to the respective user based on the user roles. The default permissions mapped to these users are available in the Permission section. However, these permissions can be added or modified.

**Note**

It is recommended to use AAIRealm or SAMLRealm.

## Access the Application by Using SAML Realm

This section provides information on managing users who can access the application with Identity Provider (IdP or IDP). The IdP acts as the Single Sign-On (SSO) service provider for implementations between the application, Investigation Toolkit, and Enterprise Case Management. This configuration prevents separate login for each application.

An identity provider (IdP) is a service that stores and verifies user identity. IdPs work with single sign-on (SSO) providers to authenticate users. An identity provider (IdP or IDP) stores and manages users' digital identities. An IdP checks user identities via username-password combinations and other factors, or it may simply provide a list of user identities that another service provider (like an SSO) checks.

See the User Groups section for Pre-configured Groups to access the application using SAML Realm.

**Note**

You can configure SAML in the following ways:

- SAML for Authentication and AAI for Authorization
  - SAML for Authentication and SAML for Authorization
- For more information, see the respective sections in the Installation Guide.

To integrate the application with IDP as the SSO provider, follow these steps:

1. Create the following Group in the IDP system. For more information on creating groups in IDP, see the OFS Admin Console User Guide.
  - Create the new groups with the same name as the pre-configured groups. For more information, see the User Groups section.
2. Create a SAML application in IDP.
3. Configure the SAML application. Key configurations in the SAML application is as follows:
  - **Entity ID:** `https://<FQDN of <application name> Linux Server>:7001/<application name>`
  - **Assertion Consumer URL:** `http://<FQDN of <application name> Linux Server>:7001/<application name>/home`

**Note**

- If the application Gateway service is enabled, then the value of this port will be the GATEWAY PORT. For example, 7071.
- Response in SAML response must be signed.

- **Include Signing Certificate in Signature:** Enabled

- **Signature hashing algorithm:** SHA-256
- **Enable Single Logout:** Enabled
- **Logout Binding:** POST
- **Single Logout URL (SAML\_LOGOUT\_URL):** `http://<FQDN of <application name>>:7001/<application name>/signoff`

**Note**

If the application Gateway service is enabled, then the value of this port will be the GATEWAY PORT. For example, 7071.

- **Logout Response URL:** `http://<FQDN of <application name>>:7001/<application name>/signoff`

**Note**

If the application Gateway service is enabled, then the value of this port will be the GATEWAY PORT. For example, 7071.

- **Encrypt Assertion:** Disabled
- **SAML Attribute Configuration**  
Update the SAML attribute configuration as described in the following table.

**Table 6-5 Attribute Configuration**

Name	Format	Type	Value	Condition
ofs_mapped_gro ups	Basic	User Attribute	Group Member	All Groups
email	Basic	User Attribute	Primary Email	-
username	Basic	User Attribute	Last Name	-

4. Create a user and map the user groups to the respective user based on the user roles.

## Access Data Studio Using SAML Realm

This section provides information on managing users who can access Data Studio with Identity Provider (IdP or IDP). The IdP acts as the Single Sign-On (SSO) service provider for implementations between the application, MMG and Data Studio. This configuration prevents separate login for each application.

An identity provider (IdP) is a service that stores and verifies user identity. IdPs work with single sign-on (SSO) providers to authenticate users. An identity provider (IdP or IDP) stores and manages users' digital identities. An IdP checks user identities via username-password combinations and other factors, or it may simply provide a list of user identities that another service provider (like an SSO) checks.

Users should map the following user groups to access the Data Studio and Investigation Toolkit:

- **DSUSRGRP:** Grants admin privileges for Data Studio

To integrate Data Studio with IDP as the SSO provider, follow these steps:

1. Create the following Group in the IDP system. For more information on creating groups in IDP, see the OFS Admin Console User Guide.
  - Create the new groups with the same name as the pre-configured groups. For more information, see the User Groups section.
2. Create a SAML application in IDP for Data Studio.
3. Configure the SAML application. Key configurations in the SAML application is as follows:
  - **Entity ID:** https://<Hostname>:7008/<application name>
  - **Assertion Consumer URL:** http://<Hostname>:7008/<application name>/saml/consume
  - **Include Signing Certificate in Signature:** Enabled
  - **Signature hashing algorithm:** SHA-256
  - **Enable Single Logout:** No
  - **Require encrypted assertion:** No

**Figure 6-3 Sample Configuration**

General	Additional configurations
Entity ID: https://i 1.7008/cs	<b>Signed SSO:</b> AssertionAndResponse
Assertion consumer URL: https://i 1.7008/cs/saml/consume	<b>Include signing certificate in signature:</b> Yes
Name ID format: Unspecified	<b>Signature hashing algorithm:</b> SHA-256
Name ID value: Username	<b>Enable single logout:</b> No
Signing certificate: -	<b>Require encrypted assertion:</b> No

4. Update the SAML attribute configuration as described in the following table.

**Table 6-6 SAML Attribute Configuration**

Name	Format	Type	Value	Condition
ofs_mapped_groups	Basic	User Attribute	Group Member	All Groups
email	Basic	User Attribute	Primary Email	-
username	Basic	User Attribute	Last Name	-
group	Basic	User Attribute	Group Member	All Groups

**Figure 6-4 Attribute Configuration**

Attribute configuration			
Name	Format	Type	Type Value
group	Basic	User Attribute	Group membership
email	Basic	User Attribute	Primary email
username	Basic	User Attribute	Last name
ofs_mapped_groups	Basic	User Attribute	Group membership

5. Create a user and map the user groups to the respective user based on the user roles.

6. After creating the application, download the “Signing Certificate” of the SAML application of the Data Studio and rename it to “key.cert” file and place in the following location:
  - <<application name>\_PATH>/mmg-home/mmg-studio/conf
7. Restart the application.

## Model Techniques/ Model Library

Following are the prerequisites to use the model techniques from the older version when you upgrade to 8.1.2.4.0 version.

### Note

MMG\_TECHNIQUE\_MASTER table had no V\_WORKSPACE\_ID column, which has been added in this release and then the primary key is updated to (V\_TECHNIQUE\_ID, V\_WORKSPACE\_ID).

To use the existing Techniques in the upgraded setup, perform the below:

The V\_WORKSPACE\_ID column will have the value set as ##WORKSPACE## for the existing records by default. If the same records has to be used in the latest version of MMG, you must update the table MMG\_TECHNIQUE\_MASTER with relevant Workspace ID.

## .PEM file creation for Model Service

After installing the application, for the model serve to work, if the `server.pem` file is not present then you must create it.

It must be created from `server.keystore` in the same path where the `server.keystore` file is present by using the following command:

```
openssl pkcs12 -in <Path_To_server.keystore> -out <Path_To_Server.pem> -nodes
```

For Example:

```
openssl pkcs12 -in
/scratch/users/ofsa/dev_home/config/server.keystore -out
/scratch/users/ofsa/dev_home/config/server.pem -nodes
```

## AAI User Provisioning SQL Scripts Generator Utility

This utility allows you to use AAI for authN in MMG. Identity administrators can create new user groups or roles, perform appropriate roles, usergroup and domain mapping, and so on.

This is provided as a SQL generator utility. This SQL scripts is executed in the AAI's configuration schema to create the required metadata.

Ensure that you run this script multiple times against each username. Additionally, generate the merge scripts accordingly.

Execute the following command from <mmg-home>/bin folder

```
./userprovisioning-script-generator.sh <user> <comma separated listof user groups
or ALL> <infodom> <segment>
```

**Sample Commands:**

```
./userprovisioning-script-generator.sh SCRIPTUSER ALL OFSAAAIINFO EMFLD
./userprovisioning-script-generator.sh SCRIPTUSER MDLREV,MDLUSR,IDENTITY_ADMIN
OFSAAAIINFO EMFLD
```

## IDCS Server Configuration

To perform IDCS Server Configuration, follow these steps:

1. Navigate to SAML IDCS Admin.
2. Navigate to Details section and add the app details in IDCS Server as shown below:

**Figure 6-5 IDCS Server**

The screenshot shows the 'App Details' configuration page for a SAML Application. The page has a header with a cloud icon and a title bar with 'Deactivate' and 'Remove' buttons. Below the header are tabs for 'Details', 'SSO Configuration', 'Users', and 'Groups'. A 'Save' button is located in the top right corner. The main content area is titled 'App Details' and contains the following fields:

- Application Type:** SAML Application
- Name:** A text input field containing a URL fragment, with a tooltip that says 'Enter 125 or fewer characters.'
- Description:** A text input field containing a URL fragment and the text 'ammg'.
- Application Icon:** A blue cloud icon with a gear inside, and an 'Upload' button below it.

3. Navigate to SSO Configuration section and add the app details in IDCS Server as shown below:

Figure 6-6 SSO Configuration section

Deactivate Remove

Details SSO Configuration Users Groups

Save

Download Signing Certificate Download Identity Provider Metadata

#### General

Use this section to define the required SSO attributes for the application and to upload the application's signing certificate.

\* Entity ID

\* Assertion Consumer URL

\* NameID Format

\* NameID Value

Signing Certificate

#### Advanced Settings

This section contains additional configuration options.

Signed SSO

Include Signing Certificate in Signature

Signature Hashing Algorithm

Enable Single Logout

\* Logout Binding

\* Single Logout URL

\* Logout Response URL

Encrypt Assertion

#### Attribute Configuration

Use this section to add user attributes. This is useful if you want to send user information including group membership details as part of the assertion.

Attributes +

Name	Format	Type	Value	Condition	Value
ofs_mapped_groups	Basic	User Attribute	Group Membersh...	All Groups	All Groups are selected

#### Authentication and Authorization

Use this section to define a more fine-grained authentication and authorization configuration.

Enforce Grants as Authorization

**Figure 6-7 IDCS Server**

▶ Advanced Settings

◀ Attribute Configuration

Use this section to add user attributes. This is useful if you want to send user information including group membership details as part of the assertion.

Attributes +

Name	Format	Type	Value	Condition	Value	
username	Basic	User Attribute	Last Name			×
email	Basic	User Attribute	Primary Email			×
ofs_mapped_groups	Basic	User Attribute	Group Membersh...	All Groups	All Groups are selected	×

**Note**


The following attributes such as username, email, and ofs\_mapped\_groups needs to configured as shown in the above image.

The user has to upload the certificate.

The user can generate the certificate by following these steps:

- Create .cer and .pem file from the below command.
  - Upload the same .cer to the idcs Signing certificate option as well:  

```
openssl req -x509 -nodes -days 365 -newkey rsa:2048 -keyout sp-privatekey.pem -out sp-certificate.cer
```
4. Navigate to Group section and Configure User Groups.

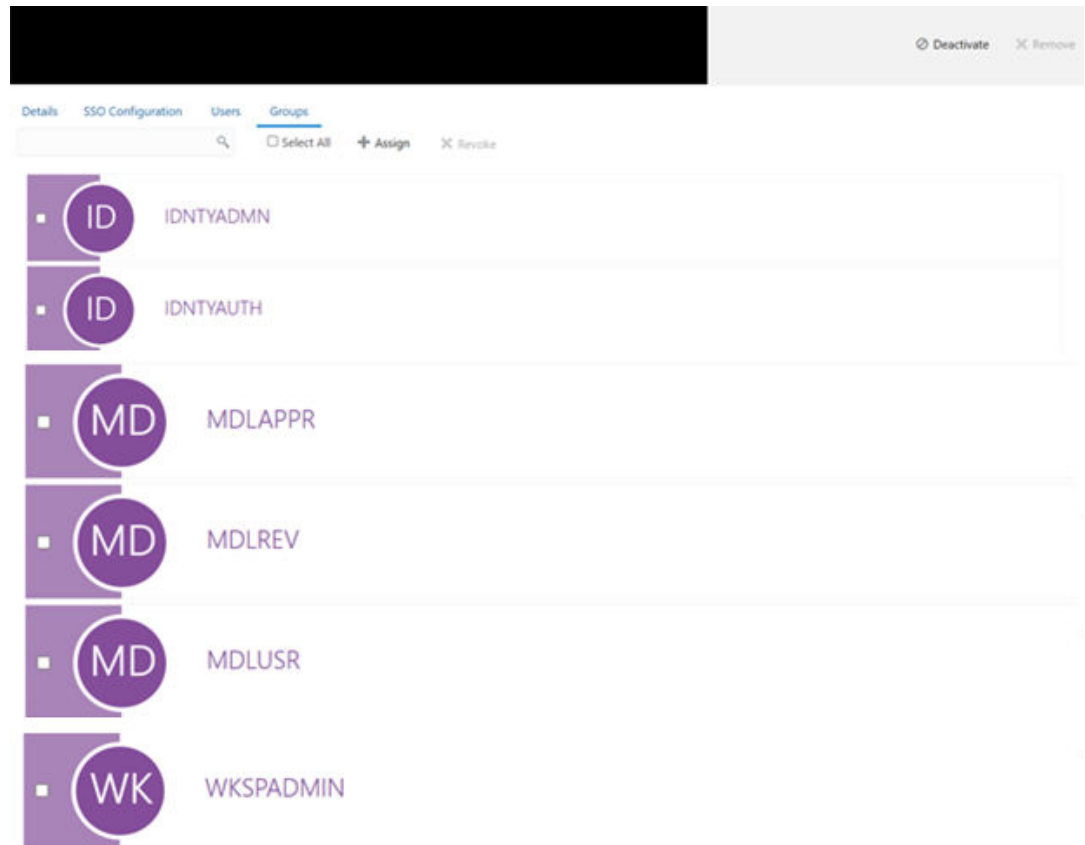**Figure 6-8 Configure User Groups in Group section**

## Conda Environment Migration and Restoration

Use this process when migrating or restoring Conda environments from a reliable source (such as production) to a sandbox instance

### Source Environment (Export Steps)

Perform the following steps:

1. Prepare the backup directory:
  - Create a directory to store the exported environments by executing the following command:
 

```
mkdir conda_export
```
  - Ensure that the mount point has sufficient storage.
2. Activate the environment.
 

Activate the environment you wish to export:

```
conda activate <conda_env_name>
```

# or, for older conda:

```
source activate <conda_env_name>
```
3. Export the Environment.
 

Pack the active conda environment (ignore missing files):

```
conda pack -n <conda_env_name> -o <conda_env_name>.tar.gz --ignore-missing-
files
```

**Note**

Do not use this method for custom environments without prior validation.

4. Deactivate the Environment.  
Deactivate the environment after packing:

```
conda deactivate
or, for older conda:
source deactivate
```

5. **Pre-requisite** - Install the conda-pack (if it is missing).
  - If the conda-pack is not installed, run:

```
pip install conda-pack
```
  - Use index-url or extra-index-url if your repository requires them.

#### Target Environment (Import Steps):

Perform the following steps to transfer the environment archive:

1. Transfer the environment archive.  
Copy the exported .tar.gz file to the target server (For example, use scp or another file transfer tool).
2. Prepare the target directory.
  - a. Log in to the target server.
  - b. Navigate to the <<miniconda3>>/envs directory:

```
cd <<miniconda3>>/envs
```
  - c. Create a directory for the environment to be imported:

```
mkdir <Env_to_be_imported>
```

# For example:

```
mkdir ml4aml_8.1.2.6.0
```
  - d. Rename the existing tar files if present, to avoid overwrites.
3. Untar the environment.  
Extract the archive contents into the newly created environment directory:

```
tar -xzf <Env_to_be_imported>.tar.gz -C <Env_to_be_imported>
```
4. Test the python executable.
  - a. Before activating, you can test the environment's python:

```
./<Env_to_be_imported>/bin/python
```
  - b. You must see the python prompt; exit with quit().
5. Activate the environment.
  - Activate the imported environment:

```
source <Env_to_be_imported>/bin/activate
```

**Note**

Your prompt must now reflect the activated environment.

6. Verify the python version.  
Confirm you are running python from within the activated environment:
 

```
python
```
7. Cleanup prefixes.  
Fix any hardcoded prefixes in the environment:
 

```
conda-unpack
```

This step can be performed either within the activated environment or by specifying the path to the python binary.
8. Register the imported environment.  
Add the environment path to your environment tracking file (optional but recommended for automation):
 

```
echo "<<miniconda3>>/envs/<Env_to_be_imported>" >> ~/.conda/Environment.txt
```
9. List the conda environments.  
Confirm the new environment appears in your environment list:
 

```
conda env list
```
10. Enroll or use the environment as needed.  
Proceed with any application-specific enrollment steps.

## Manual Configuration of Email Notification for Scheduler Batch Execution

This chapter provides information how to manually configure the SMTP settings.

### Prerequisites

- Database access privileges to update the configuration schema.
- Knowledge of your SMTP server's host name and port.

To manually enable email notifications for OFS MMG, administrators must populate the SMTP configuration details into the `AAICL_SC_COMPONENT_DETAILS` configuration table present in the OFS MMG configuration schema. This is required for environments running versions of OFS MMG released prior to the automated installer enhancement.

### Execute the Insert Statements

Replace `{{<smtphost>}}` and `{{<smtpport>}}` with your actual SMTP server host name and port number.

```
INSERT INTO AAICL_SC_COMPONENT_DETAILS
(V_COMPONENT_ID, V_PROPERTY_ID, V_PROPERTY_VALUE, V_CREATED_BY, D_CREATED_DATE,
V_MODIFIED_BY, D_MODIFIED_DATE)
VALUES
('AAICL_EMAIL', 'host', '<smtphost>', NULL, NULL, NULL, NULL);
```

### Validate the Configuration

Verify the entries by using a `SELECT` statement:

```
SELECT * FROM AAICL_SC_COMPONENT_DETAILS WHERE V_COMPONENT_ID = 'AAICL_EMAIL';
```

## Fine Tuning Studio Sessions

### Setting Timeouts

Data Studio user login sessions are logged out automatically after a set amount of time. It is recommended to set the appropriate session timeouts in the [config.sh](#) file.

#### Note

Trigger the `install.sh` file with the `-u` option if any changes have been made in the [config.sh](#) file post installation.

**Table 6-7 Timeout Settings**

Timeout Type	Description	Example Configuration	Additional Remarks
<b>Absolute Session Timeout</b>	<p>You can configure the user login sessions to be logged out automatically after a set amount of time. The number specifies the amount of milliseconds that are required to be passed after a session is created. When the timeout expires, the session is no longer valid.</p> <p>Here, the word login refers to when the user logs in to the Compliance Studio application.</p> <p>When a user session ends, all associated executions will also be killed.</p>	<pre>studio-server: security: absolute-session- timeout-ms: 86400000 // 24 hours</pre>	<p>Ends the session and kills the executions.</p> <p>It is recommended to set this.</p> <p>A value of 0 means that the sessions will never time out.</p>

Table 6-7 (Cont.) Timeout Settings

Timeout Type	Description	Example Configuration	Additional Remarks
<b>Relative Session Timeout</b>	<p>You can configure the user login sessions to be renewed as per the activity. The number specifies the amount of milliseconds a user session will be renewed to after an activity. When there is no user-activity within the specified relative timeout, the session expires and is no longer valid.</p> <p>Here activity refers to the editing of paragraph content, addition or deletion of paragraph(s), execution of paragraph(s), etc.</p>	<pre>studio-server: security: session- timeout-ms: 3600000 // 1 hour</pre>	<p>This is based on the user activity such as editing or executing. It is recommended to set this.</p> <p>A value of 0 means that the sessions will never be renewed.</p>
<b>Paragraph Execution Timeout</b>	<p>You can configure this to automatically cancel a paragraph execution after a set amount of time. When the timeout expires, Data Studio will automatically interrupt the execution of the paragraph.</p>	<pre>studio-server: interpreter: execution: run-timeout: 12h</pre>	<p>Prevents runaway jobs. You can set the timeout to 0 to disable the timeout entirely. When the timeout is disabled, paragraphs will run either until they finish or are being manually cancelled.</p>
<b>Execution Idle Timeout</b>	<p>The amount of time an interpreter session can stay idle before being invalidated by the application to free up resources. An interpreter session is considered idle when it is not running any tasks.</p> <p>You can consider the interpreter session to be equivalent to the python sessions that gets created for a notebook execution.</p> <p>Here idle refers to paragraphs that are not being executed.</p>	<pre>studio-server: interpreter: deployment: host: idle-session-timeout: 1h</pre>	<p>Frees up memory and compute. It is recommended to set this.</p>

Table 6-7 (Cont.) Timeout Settings

Timeout Type	Description	Example Configuration	Additional Remarks
<b>Incomplete Job Cleanup</b>	You can configure how often a cleanup job will be run to mark unfinished jobs as incomplete by setting <code>studio-server.jobs.incomplete.scheduled-cleanup-delay</code> value. A job can be in incomplete state if the server restarts in the middle of a Job execution or if it takes longer the specified timeout ( <code>studio-server.jobs.incomplete.timeout</code> ).	<code>studio-server:</code> <code>jobs:</code> <code>incomplete: timeout: 18h</code> <code>scheduled-cleanup-delay: 2h</code>	Useful for crash recovery.

# 7

## Upgrade Installation

This chapter describes the Upgrade Installation.

### Upgrading to 26.1.0

To update an already installed OFS MMG Application, perform the following steps:

#### Prerequisites:

- A valid working setup must be available before performing the upgrade.
- Use the MMG Config Schema, MMG Graph Schema, and MMG Datastudio Schema, from the existing version, along with the wallet configurations.
- Shutdown all the services of the existing installation by using `shutdown.sh`.
- Backup the existing OFS MMG Installation to a backup folder.
- Upgrading to 8.1.3.0.0 and above (including 26.1.0 and later releases) require MMG 8.1.2.7.x or higher versions. The installation will fail if the prerequisite is not met.
- OFS MMG DTP must be created.

#### Upgrade:

Follow steps mentioned in the [Installation](#) section.

After upgrading to OFS MMG 26.0.0, if you see the error `{{PKIX path validation failed: java.security.cert.CertPathValidatorException: signature check failed.}}` in the OFS MMG server log, Data Studio log, or notice that the Data Studio (DS) health checks are failing in the UI, it means that the required SSL certificate is missing from the Java keystore. To resolve this, re-import the Data Studio server certificate into the Java keystore used by OFS MMG and then restart the OFS MMG services. This will restore the secure connectivity between OFS MMG and Data Studio.

#### Note

Compare and copy the placeholder values from the existing installed `MMG.config.sh` to the new one mentioned in the Installation section.

#### Note

To ensure that the latest OFS MMG application and its dependent packages are reflecting correctly, all the Conda environments must be upgraded after the successful installation of the latest OFS MMG application.

This can be done by activating the Conda environment and executing the `./python_env_install.sh` script that can be located in `OFS_MMG/bin`.

# 8

## Update Utility to Reconfigure Installation Parameters

If you need to update any of the existing configuration related values, perform the following steps:

**Note**

This Utility is applicable from 8.1.2.3.0 version onwards.

**Procedure:**

1. Shut down all the services using `shutdown.sh` command.
2. Reconfigure the `config.sh` file with the required changes.
3. Execute the command `install.sh -u` from the following path: `<mmg installation path>/OFS MMG/bin`

A successful update message as follows:

```
nohup: ignoring input and redirecting stderr to stdout
PIPELINE_HOME: /scratch/ofsaapp/OFS_MMG/mmg-pipeline/pipeline
/scratch/ofsaapp/OFS_MMG/mmg-pipeline/pipeline
PIPELINE_HOME: /scratch/ofsaapp/OFS_MMG/mmg-pipeline/pipeline
Installing Pipeline Data Model. Please Wait ...
Pipeline Data Model installation finished.
Starting Pipeline Service...
Starting Data pipeline services...
Inserting DataMeta Data...
***** Data Pipeline Deployment Done *****
Stopping Graph-Service service...
Graph-Service stopped.
Stopping Graph-Service service...
Graph-Service stopped.
nohup: ignoring input and redirecting stderr to stdout
```

4. Start all the MMG services using `startup.sh` command.

# 9

## Cloning the MMG Instance

There is a consistent requirement for a faster and effective approach of replicating an existing MMG Instance for further project developments. The approach is to set up the MMG Instances that are exact copies of the current MMG Instance.

### Copying the Directories

The Installation Directory structure in the base environment has to be replicated in the clone environment.

- Copy the MMG base directory (OFS\_MMG, by default) in the base environment with all of its contents to the clone environment.  
The base directory in the clone environment will have the following folders upon copying:
  - mmg-ui
  - mmg-studio
  - mmg-service
  - mmg-schema-creator
  - mmg-pipeline
  - lib
  - bin
  - conf

#### Note

You need to copy LOG and FTPSHARE directories to the cloned environment.

### Copying the Database Schemas

To copy the Database Schemas:

1. Create a copy each of the MMG Config Schema and the Data Studio Schema.  
You may use Oracle Data Pump Export/Import or the Database Copy feature of Oracle SQL Developer. For more details, see [Database Copy using Oracle SQL Developer](#).  
The Cloned Schemas can be created either in the same database instance or in a different one.
2. Similarly, create copies of Workspace Schemas or other Data Source Schemas as required.

### Configuring Password Store with Oracle Wallet

To configure the password store with Oracle Wallet:

- Setup an Oracle wallet in the clone environment. For more details, see [Setup Password Stores with Oracle Wallet](#).

#### Note

It is recommended to use the same wallet aliases used in the base environment.

#### Updating the WALLET\_LOCATION and TNS\_ADMIN\_PATH

Update the WALLET\_LOCATION and TNS\_ADMIN\_PATH values in config.sh file present in the following path: `OFS_MMG/bin` with configured corresponding values of the cloned environment.

## Updating the Host Details

Update the HOST and PORT values in `config.sh` file present in the following path: `OFS_MMG/bin` with configured corresponding values of the cloned environment.

#### Note

It is recommended to use the same ports and context used in the base environment.

Replace the placeholders and update the host name in the MMG Config schema using the following command:

```
update NEXTGENEMF_CONFIG set V_VALUE =
'http(s)://##HOST_NAME##:##BE_PORT##/##CONTEXT##' where V_NAME in ('
BASE_URL', 'EMFSTUDIO_SERVICE_URL')
/
update NEXTGENEMF_CONFIG set V_VALUE =
'http(s)://##HOST_NAME##:7008/##CONTEXT##' where V_NAME = 'DATASTUDIO_URL'
/
update AAICL_SS_BATCH_URL set V_URL =
'http(s)://##HOST_NAME##:##BE_PORT##/##CONTEXT##' where V_URL_NAME in
('CS_SERVICE_URL', 'MMG_SERVICE_URL', 'WORKSPACE_URL')
/
```

## Update LOG\_HOME and FTPSHARE

Update the LOG\_HOME and FTPSHARE values in `config.sh` file present in the following path:

`OFS_MMG/bin` with configured corresponding values of the cloned environment.

Replace the `##LOG_HOME##` and `##FTP SHARE##` placeholders and update the `LOG_HOME` and `FTP SHARE` values in the MMG Config Schema using the following command:

```
update NEXTGENEMF_CONFIG set V_VALUE = '##LOG_HOME##' where V_NAME = 'LOG_HOME'

/

update NEXTGENEMF_CONFIG set V_VALUE = '##FTP SHARE##' where V_NAME = 'FTP SHARE'

/
```

## Setting up the SSL Keystore

To run on HTTPS, you must create a Keystore for MMG Application. For more details, see the SSL Keystore in the Configure the config.sh file.

Update the Keystore path, Password and Storetype values in config.sh file present in the following path: `OFS_MMG/bin` with configured corresponding values of the cloned environment.

## Updating Wallet Aliases for Oracle Schemas

### Note

It is recommended to use the same wallet aliases used in the base environment.

In case if the same wallet aliases cannot be used, perform the following:

1. Update the MMG Config Schema Wallet Alias values in `config.sh` file present in the following path: `OFS_MMG/bin` with configured corresponding values of the cloned environment.
2. Replace the placeholders and update the wallet alias for Workspace Schemas or other Oracle datasources using the following command:

```
update MMG_DB_MASTER set V_PROPERTY_VALUE = '##WALLET_ALIASES##' where
V_PROPERTY_NAME = 'WALLET_ALIASES' and V_DB_NAME = '##DATASOURCE NAME##'

/
```

## Updating Context and Ports

### Note

It is recommended to use the same context and ports used in the base environment.

In case if the same context and ports aliases cannot be used, perform the following:

1. Update the references of context path and port values in `config.sh` file present in the following path: `OFS_MMG/bin` with configured corresponding values of the cloned environment.
2. Replace the `##CONTEXT##` and `##BE_PORT##` placeholders.

For more details, see [Updating the Host Details](#).

## Starting MMG Services

Post updating all the required parameters in the new `config.sh` file, start the services by using the following command: `./install.sh -u`

## Cloning the Environment

We will not have to manually update the entries or Database details/service URLs for most of the tables.

This can be done in two parts:

### Part I

- Execute a utility that updates most of the entries in config tables and configuration/properties in the file system.
- In the DR setup, after cloning, configure the `<base>/mmg-home/bin/config.sh` with new values of:
  - `WALLET_LOCATION` (pointing to DR db)
  - `TNS_ADMIN_PATH` (pointing to DR db)
  - `FTPSHARE` (Ensure contents of ftpshare are also synced up between Prod and DR instances).

#### Note

All other values, as applicable (If they differ between Prod and DR environments).

- Execute the update script: `<base>/mmg-home/bin/install.sh -u`

#### Note

This is not going to install again. Instead this will just update the configuration values in config tables and files.

### Part II

For rest of the tables, additionally we can execute sql to update the following:

Replace the `PARAMVALUE` for `PARAMNAME = ¿ER_SERVICE_URL¿`

`fcc_pgx_m_config|V_GRAPH_PATH|`: Replace this if it is not null; as this is applicable only for IN-Memory graphs.|`MMG_MENU|V_MENU_URL|`For example:

**Table 9-1 Param Value for Param Name with Service URL**

V_MENU_CODE	V_MENU_NAME	V_MENU_URL
C003	Match Rules	<a href="https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/matchrulesetsummary.jsp">https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/matchrulesetsummary.jsp</a>
C004	Merge Rules	<a href="https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/mergerulesetsummary.jsp">https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/mergerulesetsummary.jsp</a>
C005	Data Survival	<a href="https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/datasurvivalsummary.jsp">https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/datasurvivalsummary.jsp</a>
C001	Manual Decisioning	<a href="https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/manualdecisioning.jsp">https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/manualdecisioning.jsp</a>
C006	Merge and Split Global Entities	<a href="https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/mergeandsplit.jsp">https://ofss-mum-1750.snbomprshared1.gbucdsint02bom.oraclevcn.com:7061/fcc/mergeandsplit.jsp</a>

# 10

## Frequently Asked Questions (FAQs) and Error Dictionary

This section consists of resolution to the Frequently Asked Questions and Error Codes noticed during the installation.

### Topics:

### Related Topics

- [Frequently Asked Questions](#)
- [Frequently Asked Questions \(FAQs\) and Error Dictionary](#)

## Frequently Asked Questions

You can refer to the Frequently Asked Questions, which is developed with the interest to help you resolve some of the installation and configuration issues. This intends to share the knowledge of problem resolution to a few of the known issues. This is not an official support document and just attempts to share the knowledge of problem resolution to a few of the known issues.

## Frequently Asked Questions

1. Why does my console show an unsuccessful message during wallet creation?  
Please check if you have run the following commands correctly. For more information on wallet creation, see [Setup Password Stores with Oracle Wallet](#).
  - a. `mkstore -wrl <wallet_location> -create //creates a wallet in the specified location.`
  - b. `mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name> //creates an alias in the Studio Schema.`
  - c. `mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name> //creates an alias in the Atomic Schema.`
  - d. `mkstore -wrl <wallet_location> -createCredential <alias-name> <database-user-name> //creates an alias in the configuration schema.`

If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).

2. Where can I find my created wallet?  
Your wallet will be in the directory you have set as your wallet location.  
If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).
3. When should I create a Database link, and if yes, how do I do it?  
Create a Database link to connect the Atomic and Configuration Database Schemas to the Studio Database Schema if the databases are different. You must create the link in the Studio Database.

In the following example, a link has been created from the Configuration Schema to the Atomic Schema by running the following script:

```
create public database link <studio database link> connect to <Config Schema>
identified by password using ' (DESCRIPTION = ADDRESS_LIST = (ADDRESS =
(PROTOCOL = TCP) (HOST =<host name> (PORT = <port number>)) (CONNECT_DATA =
(SERVICE_NAME = <service name>))) ' ;
```

```
Config Schema : <Config Schema>/password ' (DESCRIPTION = ADDRESS_LIST =
(ADDRESS = (PROTOCOL = TCP) (HOST =<host name> (PORT = <port number>))
(CONNECT_DATA = (SERVICE_NAME = <service name>))) ' ;
```

After running the script, run the FCDM Connector and ICIJ Connector jobs.

4. Why does my installed studio setup not have any notebooks?  
Some default notebooks are ready to use when you install Compliance Studio. If you do not see any notebooks when you log in to the application, you may not be assigned any roles. Check the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory to see if you have been assigned any roles, and if not, contact your Administrator. If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).
5. What can I do if the Schema Creation fails?  
If the Atomic Schema creation fails, login to the BD and ECM Atomic Schemas and run the following query: select \* from fcc\_orahive\_datatypemapping; The fcc\_orahive\_datatypemapping table must not have duplicate data types. If the Studio schema creation fails, login as a Studio user and run the following query: select \* from fcc\_datastudio\_schemaobjects Run the following query to replace all Y values with "": update fcc\_datastudio\_schemaobjects set SCHEMA\_OBJ\_GENERATED=" After the schema creation is successful, the value of the SCHEMA\_OBJ\_GENERATED attribute changes to Y. You can also check for errors in the application log file in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory. If your issue is still not resolved, contact My Oracle Support (MOS).
6. What can I do if the Import\_training\_model batch execution fails?  
Batch Execution Status always displays success in case of success or failure.  
  
You can also check for errors in the application log file in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory. You can fix the failure according to the log details and run the same batch again.
7. Why is the sqoop job not successful?  
The Sqoop job may fail if some of the applicable values are null or if the service name or SID value is not provided. Do one of the following:
  - Check if there are any null values for the applicable configurations in the config.sh and FCC\_DATASTUDIO\_CONFIG tables. If there are any null values, add the required value.
  - Check for any errors in the application log file in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory. If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).
8. Why am I getting the following error when I run the sqoop job:  
Error: Could not find or load main class  
com.oracle.ofss.fccm.studio.batchclient.client.BatchExecute  
  
Set the FIC\_DB\_HOME path in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/ficdb directory.  
  
You can also check for any errors in the application log file in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory.
9. 11. Why is the PGX server is not starting even though the graph service is up and running?  
Grant execution rights to the PGX folder to start the PGX server.
10. Why is the PGX Server not starting?

The PGX server starts only after the FCDM tables are created after the FCDM Connector Job is run. Check if all FCDM tables are created and then start the PGX Server. You can also check for any errors in the application log file in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory. If your issue is still not resolved, contact [My Oracle Support \(MOS\)](#).

**11. Why is the ICIJ Connector job failing?**

This can happen because of a missing csv file path in the FCC\_STUDIO\_ETL\_FILES table. Add the csv file path. You can also check for any errors in the application log file in the <COMPLIANCE\_STUDIO\_INSTALLATION\_PATH>/deployed/logs directory. If your issue is still not resolved, contact My Oracle Support (MOS).

**12. What should I do if there is a below Error while selecting edges in manual Decision UI?**

```
java.lang.IllegalStateException: Unable to create
PgxFuturejava.lang.IllegalStateException: Unable to create
PgxFuture at
oracle.datastudio.interpreter.pgxFuture.CombinedPgxFutureDriver.getOrCreateSession(Combine
dPgxFutureDriver.java:147) at
oracle.pgxFuture.graphviz.driver.PgxFutureDriver.getGraph(PgxFutureDriver.java:334) at
oracle.pgxFuture.graphviz.library.QueryEnhancer.createEnhancer(QueryEnhancer.java:22
3) at
oracle.pgxFuture.graphviz.library.QueryEnhancer.createEnhancer(QueryEnhancer.java:20
9) at oracle.pgxFuture.graphviz.library.QueryEnhancer.query(QueryEnhancer.java:150)
at oracle.pgxFuture.graphviz.library.QueryEnhancer.execute(QueryEnhancer.java:136)
at
oracle.pgxFuture.graphviz.interpreter.PgxFutureInterpreter.interpret(PgxFutureInterpreter.java
:131) at
oracle.datastudio.interpreter.pgxFuture.PgxFutureInterpreter.interpret(PgxFutureInterpreter.java
:120) at
org.apache.zookeeper.interpreter.LazyOpenInterpreter.interpret(LazyOpenInterpre
ter.java:103) at
org.apache.zookeeper.interpreter.remote.RemoteInterpreterServer$InterpretJob.jo
bRun(RemoteInterpreterServer.java:632) at
org.apache.zookeeper.scheduler.Job.run(Job.java:188) at
org.apache.zookeeper.scheduler.FIFOScheduler$1.run(FIFOScheduler.java:140) at
java.base/
java.util.concurrent.Executors$RunnableAdapter.call(Executors.java:515) at
java.base/java.util.concurrent.FutureTask.run(FutureTask.java:264) at
java.base/
java.util.concurrent.ScheduledThreadPoolExecutor$ScheduledFutureTask.run(Sched
uledThreadPoolExecutor.java:304) at java.base/
java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1128
) at java.base/
java.util.concurrent.ThreadPoolExecutor$Worker.run(ThreadPoolExecutor.java:628
) at java.base/java.lang.Thread.run(Thread.java:834)Caused by:
java.util.concurrent.ExecutionException:
oracle.pgxFuture.common.auth.AuthorizationException: PgxFutureUser(FCCMDSADMIN) does not
own session 6007f00a-8305-4576-9a56-9fa0f061586f or the session does not exist
code: PGX-ERROR-CQAZPV67UM4H at java.base/
java.util.concurrent.CompletableFuture.reportGet(CompletableFuture.java:395)
at java.base/
java.util.concurrent.CompletableFuture.get(CompletableFuture.java:1999) at
oracle.pgxFuture.api.PgxFuture.get(PgxFuture.java:99) at
oracle.pgxFuture.api.ServerInstance.getSession(ServerInstance.java:670)
oracle.datastudio.interpreter.pgxFuture.CombinedPgxFutureDriver.getOrCreateSession(Combine
dPgxFutureDriver.java:145) ... 17 moreCaused by:
```

```

oracle.pgx.common.auth.AuthorizationException: PgxUser(FCCMDSADMIN) does not
own session 6007f00a-8305-4576-9a56-9fa0f061586f or the session does not exist
code: PGX-ERROR-CQAZPV67UM4H at
oracle.pgx.common.marshalers.ExceptionMarshaler.toUnserializedException(Except
ionMarshaler.java:107) at
oracle.pgx.common.marshalers.ExceptionMarshaler.unmarshal(ExceptionMarshaler.j
ava:123) at
oracle.pgx.client.RemoteUtils.parseExceptionalResponse(RemoteUtils.java:130)
at
oracle.pgx.client.HttpRequestExecutor.executeRequest(HttpRequestExecutor.java:
198) at
oracle.pgx.client.HttpRequestExecutor.get(HttpRequestExecutor.java:165) at
oracle.pgx.client.RemoteControlImpl$10.request(RemoteControlImpl.java:313) at
oracle.pgx.client.RemoteControlImpl$ControlRequest.request(RemoteControlImpl.j
ava:119) at
oracle.pgx.client.RemoteControlImpl$ControlRequest.request(RemoteControlImpl.j
ava:110) at
oracle.pgx.client.AbstractAsyncRequest.execute(AbstractAsyncRequest.java:47)
at oracle.pgx.client.RemoteControlImpl.request(RemoteControlImpl.java:107) at
oracle.pgx.client.RemoteControlImpl.getSessionInfo(RemoteControlImpl.java:296)
at
oracle.pgx.api.ServerInstance.lambda$getSessionInfoAsync$14(ServerInstance.jav
a:490) at java.base/
java.util.concurrent.CompletableFuture.uniComposeStage(CompletableFuture.java:
1106) at java.base/
java.util.concurrent.CompletableFuture.thenCompose(CompletableFuture.java:2235
) at oracle.pgx.api.PgxFuture.thenCompose(PgxFuture.java:158)

```

Then, perform the below steps as a workaround -

Export the "Manual Decision" Notebook

Add the link parameter just below Description

for Ex - "link": "manualDecision",

### Figure 10-1 Manual Decision


```

[{
 "name" : "manual Decision",
 "description" : null,
 "link": "manualDecision",
 "tags" : null,
 "version" : "5",
 "layout" : "zeppelin",
 "type" : "Default",
 "readOnly" : false,


```

Truncate the table "fcc\_er\_paragraph\_manual" in Studio Schema. Import the modified notebook again.


13. How do I increase **ZEPPELIN\_LIMIT\_INTERPETER\_OUTPUT** in the Python Interpreter? Perform the following steps to increase **ZEPPELIN\_LIMIT\_INTERPETER\_OUTPUT** in the Python Interpreter:
  - a. From UI: Using Wizard screen  
Go to Interpreters screen in MMG-Studio from Datastudio Options tab.

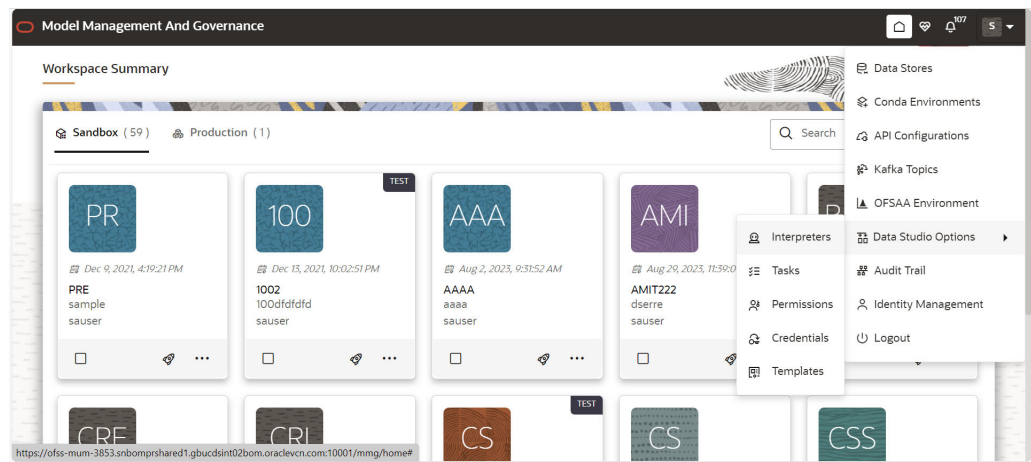**Figure 10-2** Datastudio Options tab

- b. Once on the interpreters option screen select the Python Interpreter for which we want to configure the `zeppelin.limit.interpreter.output`.

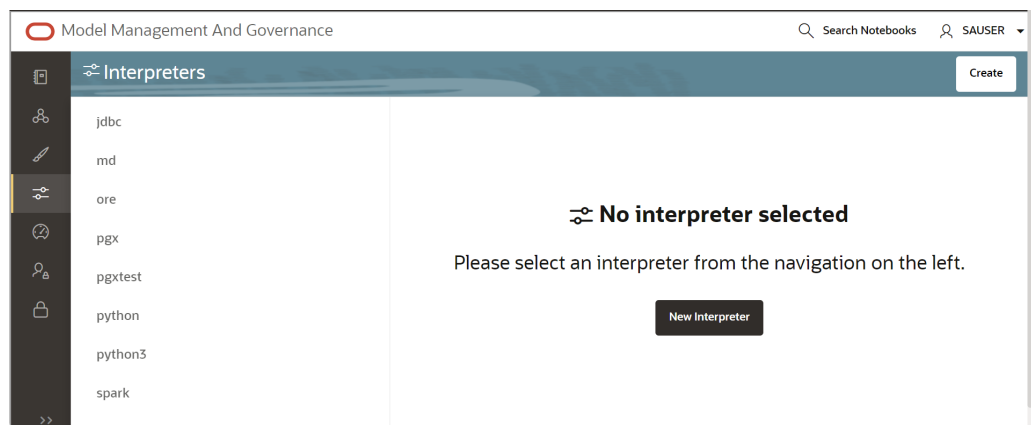
**Figure 10-3** Interpreter screen

- c. Select python from the LHS options.

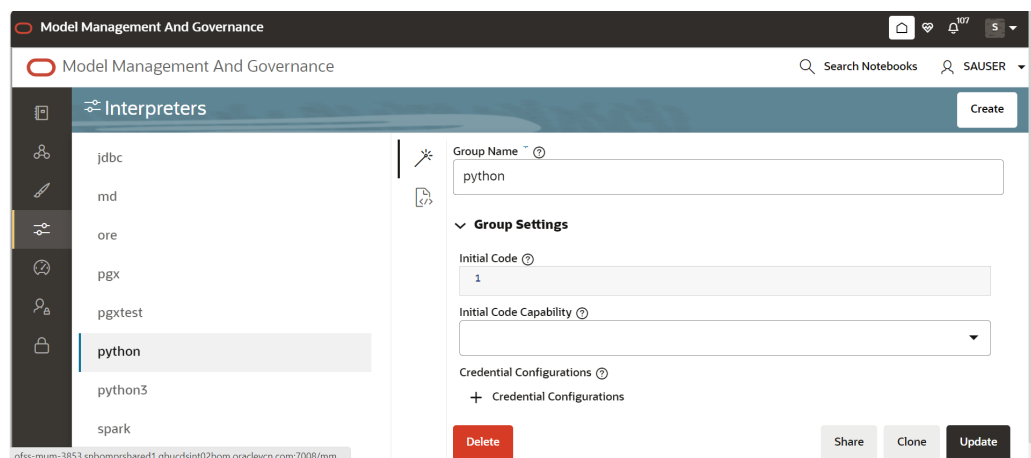**Figure 10-4** Python Interpreter


- d. Now scroll down in the RHS side and click on the oracle.datastudio.python.DsPythonInterpreter under Interpreter Client Configurations it will open a popup.

**Figure 10-5 Interpreter Client Configurations**

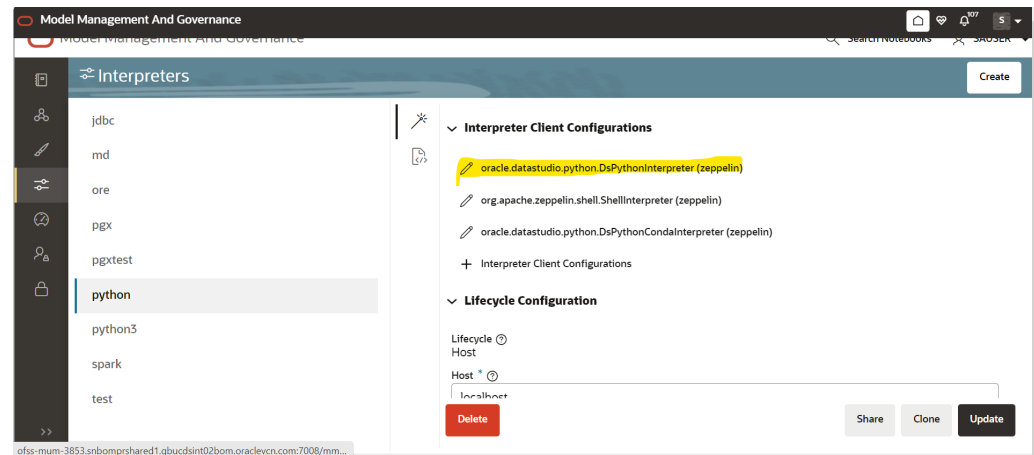


- e. In the popup scroll down and click on + Properties under Properties as shown:

**Figure 10-6 Properties screen**

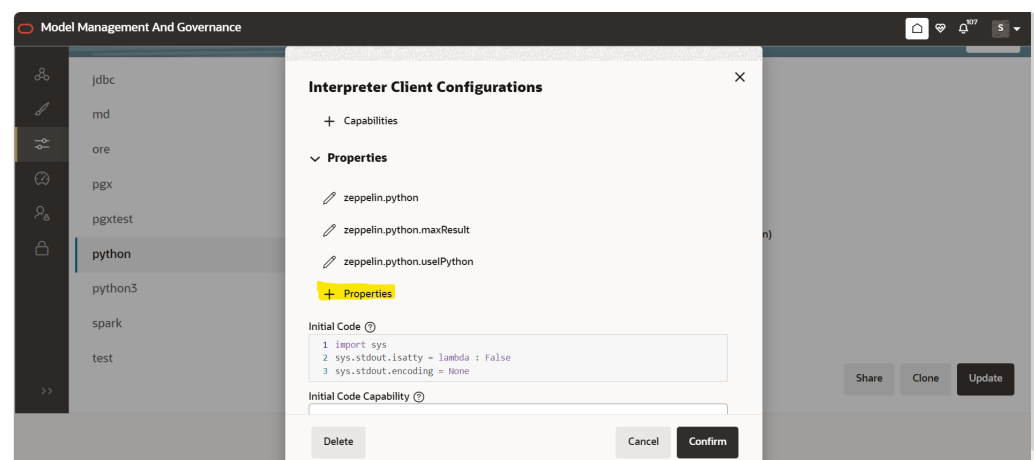

- f. Another popup will open fill the options as shown and set the default value according to your needs if you are not able to see the Create and Cancel button, click on the part of the popup pointed by red arrow. The default value for zeppelin.interpreter.output.limit if not set is 102400 (in bytes).

Figure 10-7 Popup box

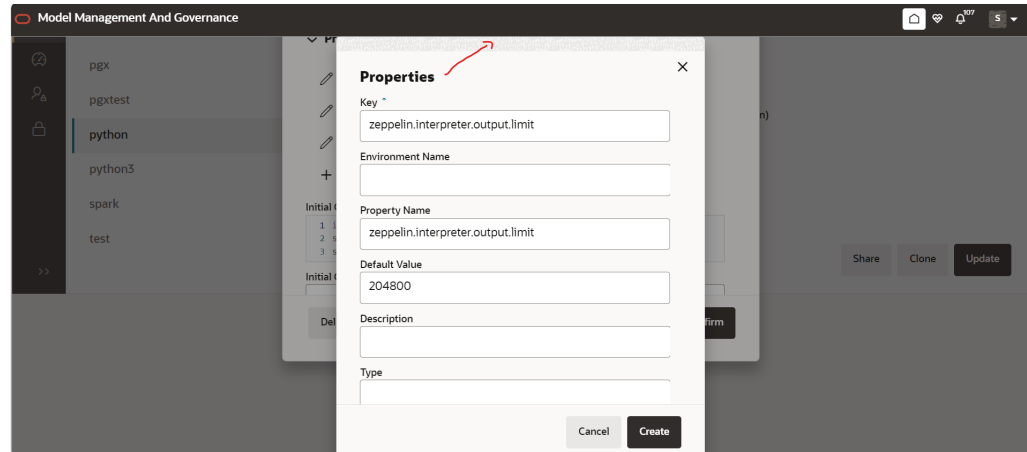


### Note


Increasing the default option from 102400 to some bigger value will slow down the rendering of outputs of python paragraphs.

- g. Once filled click on Create (you will see `zeppelin.interpreter.output.limit` under the Properties section), then click on **Confirm** (if you are not able to see the Confirm button on the UI, either click on the same shaded area on popup as highlighted in above image or zoom out in UI of browser) and then click on Update in the lower right side of the screen.
- h. After following all the above steps, restart the MMG-Studio for changes to reflect.
- a. Using JSON screen
  - i. Follow the steps i, ii and iii from above, then click on the following icon on UI pointed by red arrow and following json config view will open.


Figure 10-8 JSON Config View

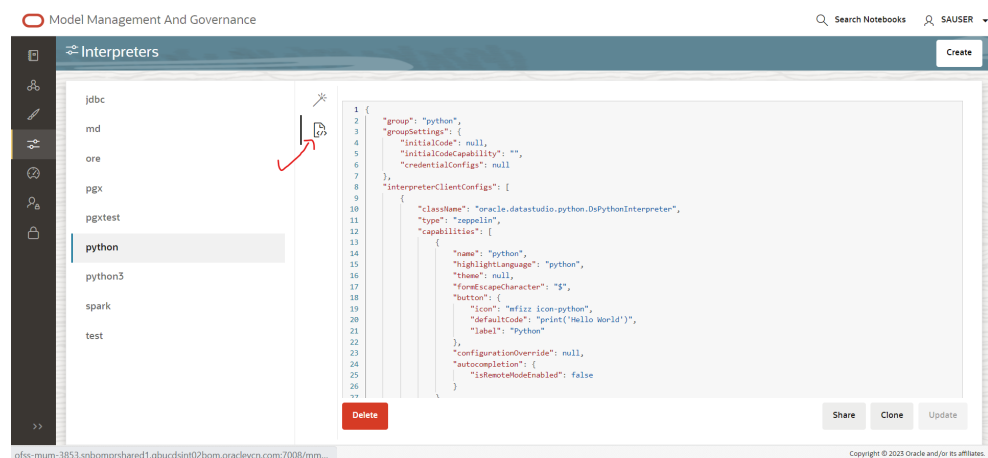

- ii. Scroll down under `interpreterClientConfigs` with `className` `oracle.datastudio.python.DsPythonInterpreter` you will find following properties section with bunch of zeppelin configurations.

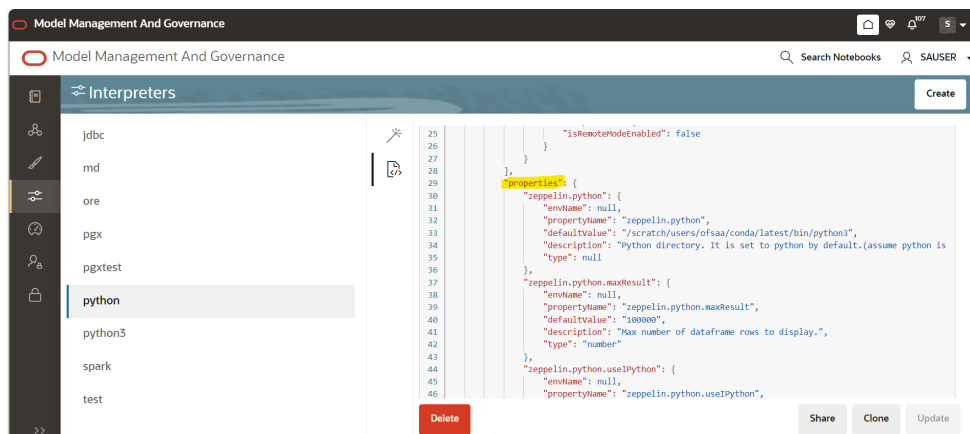**Figure 10-9 Interpreter Client Config**

- iii. After the last entry in properties add the `zeppelin.interpreter.output.limit` also as shown in the following image:

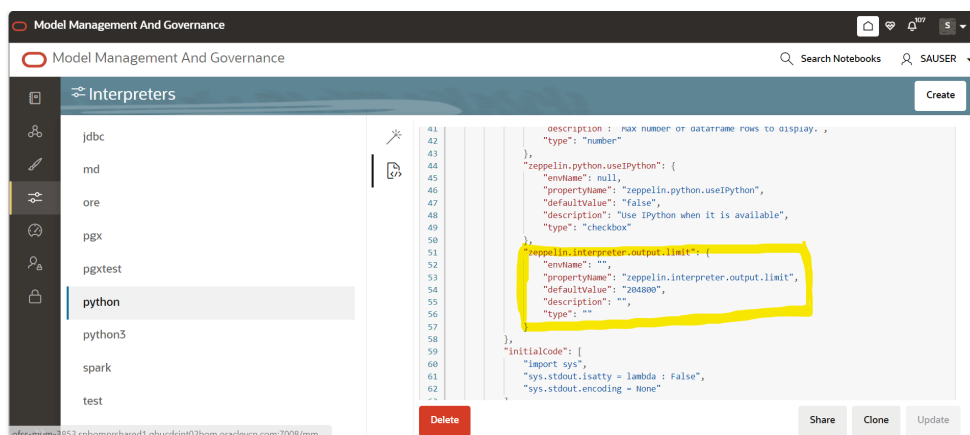**Figure 10-10 Properties screen**

- iv. After doing the change the Update button will get enabled in the bottom right corner click on it, you will get a message as “python interpreter updated”.
  - v. Now restart the MMG-Studio service for changes to reflect.
- b. From filesystem: (Datastudio version 23.4.x onwards)
    - i. Go to the Python Interpreter option as pointed out in From UI using wizard screen option above, if you have already ran the MMG services before you will see the python interpreter listed there. Delete it, if you are running the MMG Application for the first time on a fresh schema then you do not need to do this step.
    - ii. After deleting the Python Interpreter or if start has not been done yet, go to filesystem inside `mmg-home/mmg-studio/server/builtin/interpreters`, open `python.json` in a text editor.
    - iii. Scroll down under interpreter ClientConfigs with className `oracle.datastudio.python.DsPythonInterpreter` you will find following properties section with bunch of Zeppelin configurations. After the last entry in properties add the Zeppelin Interpreter.output.limit also as shown in step iii) of 1) From UI b) using JSON screen (last image of From UI way). Save the `python.json` with the desired default value and the changes done.

- iv. Now restart/start the MMG-Studio for your changes to reflect.

### Note

If you have configured the python environment for MMG-Studio (basically you have installed pandas and numpy which are subset of libraries required by MMG as pre-req), you can run the below script on python paragraph.

```
%python
import pandas as pd
import numpy as np
Create 1000 rows of random data for 20 columns
data = np.random.randn(1000, 20)
Create column names columns = ["Column_{i+1}" for i in range(20)]
Create DataFrame df = pd.DataFrame(data, columns=columns)
Display the DataFrame
z.show(df)
Output in table view
```

**Figure 10-11 Output in table view**

Column_1	Column_2	Column_3	Column_4	Column_5	Column_6	Column_7	Column_8
-0.8933910191898579	0.7615799878489635	0.75806146350438	1.2753426005586657	-1.5934944618973514	0.596522292150769	0.5829090157274505	-0.197946806574
-0.4792920585860974	0.6014851803485978	-0.07350947598695965	0.06001880557421651	-0.06466795427830568	-0.44494929567260394	-0.8361218782799762	-1.418531248626
0.4790844079584656	-1.34352772958042	-1.2684080797668027	0.8988179711893556	-0.709742130514913	-1.9565143492049126	0.3481468677129027	-0.419456821682
0.03732633828712172	0.35468022887354104	-1.547544190292229	-0.8939236490440552	-0.7403558285426715	-0.7646700982508165	1.7847515628557471	0.1669535658351
0.42289642019235335	-1.626284936446582	0.7038916058037783	0.4856477230960553	0.8823036516706713	1.8401252449352867	-1.4962853947932677	-0.011098415694

Page 1 of 105 (1-5 of 521 Items) |< 1 2 3 4 5 ... 105 >| Load More

Output is truncated to 204800 bytes. Learn more about ZEPPELIN\_INTERPRETER\_OUTPUT\_LIMIT

You can see the ZEPPELIN\_INTERPRETER\_OUTPUT\_LIMIT value as warning if the table content is more than the set default value for `zeppelin.interpreter.output.limit` and accordingly you can modify the default value for same.

14. What should I do when the result set is truncated if the size goes above '102400' bytes? Perform the following steps:
  - a. Login to Compliance Studio.
  - b. Navigate to interpreter `zeppelin.interpreter.output.limit`.

**Figure 10-12 Zeppelin Interpreter**

- c. Set the value to the required size.
  - d. Restart the Studio Application.
15. What should I do if there is a below `KubernetesClientException` in `load-to-elastic-search.log`, `matching-service.log` files after Compliance Studio installation?
- ```
configServicePropertySourceLocator - Could not locate PropertySource: I/O
error on GET request for "http://localhost:8888/<Service Name>/default":
Connection refused (Connection refused); nested exception is
java.net.ConnectException: Connection refused (Connection
refused)onfigServicePropertySourceLocator - Could not locate PropertySource:
I/O error on GET request for "http://localhost:8888/<Service Name>/default":
Connection refused (Connection refused); nested exception is
java.net.ConnectException: Connection refused (Connection refused)20:04:55.686
[ main] WARN .cloud.kubernetes.config.ConfigMapPropertySource - Can't read
configMap with name: [<Service Name>] in namespace:[null].
Ignoring.io.fabric8.kubernetes.client.KubernetesClientException: Operation:
[get] for kind: [ConfigMap] with name: [<Service Name>] in namespace: [null]
failed. at
io.fabric8.kubernetes.client.KubernetesClientException.launderThrowable(Kubern
etesClientException.java:64) ~[kubernetes-client-4.4.1.jar!/:?] at
io.fabric8.kubernetes.client.KubernetesClientException.launderThrowable(Kubern
etesClientException.java:72) ~[kubernetes-client-4.4.1.jar!/:?] at
io.fabric8.kubernetes.client.dsl.base.BaseOperation.getMandatory(BaseOperation
.java:229) ~[kubernetes-client-4.4.1.jar!/:?] at
io.fabric8.kubernetes.client.dsl.base.BaseOperation.get(BaseOperation.java:162
) ~[kubernetes-client-4.4.1.jar!/:?] at
org.springframework.cloud.kubernetes.config.ConfigMapPropertySource.getData(Co
nfigMapPropertySource.java:96) ~[spring-cloud-kubernetes-
config-1.1.3.RELEASE.jar!/:1.1.3.
```

You can ignore the error when the following message is displayed at the end of the log; if you do not see this message, contact [My Oracle Support \(MOS\)](#) and provide the applicable error code and log:

```
13:52:57.698 [main] INFO org.apache.catalina.core.StandardService - Starting
service [Tomcat] 13:52:57.699 [ main] INFO
org.apache.catalina.core.StandardEngine - Starting Servlet engine: [Apache
Tomcat/9.0.43]
```

16. What happens if a new sandbox workspace is created?
- When a new sandbox workspace is created, the folders of the older workspace are by default being copied into the new workspace. Here, folder means the Model Objectives. The Model Objectives are global objects and will be visible across the workspaces. However, the models created within those objectives will be private. This has been done purposely as you expect multiple modelers working on the common objective in their private workspaces.

17. Not able to access any models in the copied folders in the new workspace – the folders are being copied as empty folders?
Yes, you should not be able to access other workspace's private models. Also, as long as other users are working on the objective and have their models in there, you will not be able to delete the objectives.
18. What should you do when UI pages does not load due to less network speed?
The default time to load all the modules of OJET/REDWOOD page is 1 minute. Reload the page to view the UI pages.
19. What are the Workspace parameters used in MMG Python Scripts?
The following parameters are used:
- **workspace.list_workspaces():** Used to fetch a list of all workspaces. This list is populated in the dropdown menu of datastudio.
 - **workspace.check_aif():** A method used to check if AIF is enabled or not
 - **workspace.attach_workspace("SANDBOX123"):** A method used to set workspace
 - **workspace.get_workspace():** Used to fetch the selected workspace (for example, SB1)
 - **get_mmg_studio_service_url():** Used to fetch the base URL (for example, http://whf999yyy:0000/mmg)
 - **get_user():** Used to fetch current user (for example, mmguser)
20. How to take connections for Data access?
You need access to the data to work on it. For the workspace, there are some underlying Data Schemas. You can also create a workspace that allows to select multiple underlying Data Schemas. You can use or remove multiple Data Schemas like multi combo box, where 1, 2, 3, and 4, 5 are schemas underlying. When you work with the models, you can access the notebook to fetch data for all these Data Schemas and create some data frames out of it. That can be used for model reading or other purposes.
- This happens in workspace of the sandbox where you are building a Notebook. The same Notebooks gets promoted to production workspace. Therefore, the workspace production has its own set of underlying Data Schemas. When you build the model with getting connection for the underlying Schema 1 and 2, and getting the data and building, it makes rules work and will not be affected if the same Notebooks gets promoted to production or deployment is cloned.
- Therefore, the Notebook needs to run which should not be fetching this data because it will be working on any 1 and 2 Schemas.
- To avoid this issue, you can use connection feature to connect with a schema. This is a wrapper function where you can specify which workspace you are connecting to.
- You can enter the workspace details to get the connection and that starts fetching the data.
- When you create the Notebook to production, a script runs to not to connect the workspace. This also uses overloaded methods. This method tells how to get the connection. Simple get connection gets the primary connection as first Data Schema which you are using without any overload.
- The second connection gets an ID as the name the Data Source which you are using and for the current one will passes as get connection 1.
- In the sandbox, this script looks for 1 and it creates a connection and moves to production. It will again look for an equivalent 1 and tries to get a connection.
- Therefore, whatever you select first, becomes the first Data Schema, Second Schema, Third Schema, therefore, Primary, Secondary, Tertiary and so on. You can also pass the

number while getting the connection to get the first primary Data Schema as a secondary Data Schema. Therefore, when it runs in sandbox, it gets the Secondary Schema. When it runs in the production, it fetches a Secondary Data Schema of production.

21. What are parameters to establish the Connection for data access?

The following section lists the connection details such as the Data Sources and so on:

- `workspace.get_connection()`: fetches connection object for the Primary Data Source of the workspace. This is equivalent to executing `workspace.get_connection(1)`.
- `workspace.get_connection('id')`: fetches connection for the Data Source by name. For example, `workspace.getconnection('ws_data_1')` – here 'ws_data_1' is one of the underlying Data Source for the workspace.
- `workspace.get_connection(n)`: fetches connection for the Data Source by order. For example, `workspace.getconnection(2)` – this will fetch connection for the Secondary Data Source.

The following section lists the workspace details: After a workspace is attached, we can list Data Sources related to that using:

- `workspace.list_datasources()`: will list Data Sources related to attached workspace with default order 1 For example, `{'Data Source': [{'name': 'newdatasource1', 'order': '1'}]}`
- `workspace.list_datasources("SB1")`: will list Data Sources related to SB1 workspace with default order 1 For example, `{'Data Source': [{'name': 'ds1', 'order': '1'}]}`
- `workspace.list_datasources("SB1", 1)`: will list Data Sources related to SB1 workspace with order 1 as passed in second argument For example, `{'Data Source': [{'name': 'ds1', 'order': '1'}]}`

Note: This is applicable for Python and Python variants interpreters, and not on any other interpreters.

22. What should I do if the Python installation displays the following error message, " If ModuleNotFoundError: No module named '_lzma'?"

You must install xz-devel library before installing the Python. For more details, see [Install MMG Python Library](#) section.

To install, perform the following step:

```
$yum install -y xz-devel.
```

23. What should I do to reconfigure DS Studio server port and its interpreter's default port to available ports?

You can configure the DS Studio server port and its interpreter's default port via the `config.sh` file. See the [Configure the config.sh file](#) topic.

24. Dataset issue with the latest version of pydantic package (2.18.7)

Pydantic package (2.18.7) is incompatible with MMG functionality. So, when you reinstall the package the uninstall and reinstall pydantic package version 1.10.13.

- `python3 -m pip uninstall pydantic`
- `python3 -m pip install pydantic==1.10.13 --user`

25. How do I install OFS MMG Python dependencies from a local repository (Artifactory)?

In order to install the Python dependencies from the MMG tarball (`mmg-<version>.tar.gz`) by using a local repository, run: (Replace `<version>` with your OFS MMG build version.)

```
python3 m pip install mmg<version>.tar.gz \
--index-url http://artifactory.XYZ.com/artifactory/api/pypi/XYZ-py-local/simple \
--trusted-host artifactory.XYZ.com
```

Add an extra index URL if they are differentL

```
python3 m pip install mmg<version>.tar.gz \
--index-url http://artifactory.XYZ.com/artifactory/api/pypi/XYZ-py-local/simple \
--extra-index-url http://artifactory.XYZ.com/artifactory/api/pypi/XYZ-py-local/simple \
--trusted-host artifactory.XYZ.com
```

26. MMG Configuration steps for Interpreters**a. For JDBC**

Update the below property in jdbc.json under OFS_MMG/mmg-studio/server/builtin/interpreters

```
"propertyName": "default.url"
"defaultValue": "<JDBC_URL>"
```

For example: jdbc:oracle:thin:@ofss-mum-1033.snbomprshared1.gbucdsint02bom.oraclevcn.com:15 21/MMG19PDB

```
"propertyName": "default.user",
"defaultValue": "<schameusername>"
```

For example: The schema user to which you want to connect, for example: datastudio schema name,

```
"propertyName": "default.password",
"defaultValue": "<schemapassword>"
```

For example: Password of the provided schema user.

Start the jdbc interpreter by executing below command under //OFS_MMG/mmg-studio/interpreter-server/jdbc-interpreter-22.4.3/bin ./

```
jdbc-interpreter
```

If the jdbc interpreter needs to be included in the datastudio startup script remove the below entry from /OFS_MMG/mmg-studio/bin/startup.sh --jdbc -1.

For Spark

Configuration with Kerberos enabled remote spark cluster:

- a. Copy the configured Spark directory from hadoop cluster to <MMG Studio>/interpreter-server/spark-interpreter/extralibs. For example: spark-2.4.8-bin-hadoop2.7
- b. Copy the below files to the <MMG Studio>/interpreter-server/spark-interpreter/extralibs krb5.conf <keytabfile>.keytab
- c. To run Spark in yarn-client mode, configure the following parameters in this file OFS_MMG/mmg-studio/server/builtin/interpreters/spark.json


```
spark.master = yarn-client
spark.driver.bindAddress = 0.0.0.0
spark.driver.host = <host> -> Apache Spark host
```

Note

When using the Kubernetes interpreter lifecycle, <host> can be the IP address or hostname of any node in your Kubernetes cluster. When using the Host interpreter lifecycle, <host> should be the IP address or hostname of the node that runs the Spark interpreter.

Note

When connecting to a YARN cluster, the Spark driver authenticates as the UNIX user that runs the Spark interpreter. You can set the `HADOOP_USER_NAME` environment variable to make the Spark driver authenticate as a different user. If you use the Host interpreter lifecycle, then you can do this by exporting the `HADOOP_USER_NAME` environment variable before starting the Spark interpreter process. If you use the Kubernetes interpreter lifecycle, then you can do this by setting the `HADOOP_USER_NAME` environment variable in the resource manifest (spark.yml).

- d. Update file `spark-defaults.conf` keytab location to the location where `<keytabfile>.keytab` file is copied
- e. Update file `spark-env.sh` with the `krb5.conf` location to the location where `krb5.conf` file is copied.
For example: `Djava.security.krb5.conf=/OFS_MMG/mmg-studio/interpreter-server/spark-inte rpreter-22.4.2/extralibs/krb5.conf"`.

Application Pack 8.1.3.1.0 FAQs

1. **If the cx_Oracle connection is failing in DS with below error in OEL 8.**
Fail to execute line 4: `cx_Oracle.connect(dsn=dsn_alias)\nTraceback (most recent call last):\n File "/tmp/1638454321889-0/zeppelin_python.py", line 163, in <module>\n exec(code, _zcUserQueryNameSpace)\n File "<stdin>", line 4, in <module>\n cx_Oracle.DatabaseError: DPI-1047: Cannot locate a 64-bit Oracle Client library: "libnsl.so.1: cannot open shared object file: No such file or directory". Install the libnsl package as below: yum install libnsl or sudo yum install libnsl`
2. **Incase of Python Interpreter fails With `py4j` Error**
When running interpreters locally, they assume all the dependencies to be already installed and available. Python Interpreter needs `py4j` Package, exact steps to install it depend on the Operating System. If you use `pip`, it can be done with ``bash pip install --user py4j``
Install the package for all users, root user can run this command without `--user`.
3. **What is the reason for the http error code 401 when I successfully log in to the MMG Application while MMG Studio is down?**
If MMG Studio is not up during the MMG application login, the mmg-ui logs capture the http error code : 401 . Since the cookie creation is done during MMG application login, the user must re login to the MMG application once the Studio is up and running.
4. **What should I do when the following error message is displayed, and the SSL module is unavailable for Linux 8?**
`urllib3.exceptions.SSLError: Can't connect to HTTPS URL because the SSL module is not available. During handling of the above expectation, another exception occurred:`
 - a. Install the `compat-openssl10` module on Linux 8.
 - b. Log in to the server as a root user where MMG Application is installed.
 - c. Run the following Shell command: `yum -y install compat-openssl10`.

Configuration Property Names

In OFS MMG version 26.1.0, the configuration property names are logically grouped with a standardized prefixing system, for example **MMG_** for OFS MMG and **AAI_** for OFS AAI. This

ensures that every parameter is immediately identifiable, which in turn reduces configuration errors during deployment.

Note that when upgrading from previous OFS MMG versions to OFS MMG version 26.1.0, the installation process will require you to input values by using the updated property names.

The following table provides information on the new names and the old configuration names:

Table 10-1 Configuration Property New and Old Names

| New Name | Old Name |
|--|-------------------------------|
| MMG_LOG_DIR | LOG_HOME |
| FTPSHARE_DIR | FTPSHARE |
| MMG_LOG_TIMEZONE | LOG_TIMEZONE |
| WEB_CONTEXT | CONTEXT_PATH |
| MMG_API_USERNAME | FCC_API_USER |
| MMG_SESSION_SECRET | SESSION_TOKEN_CREDENTIALS |
| MMG_UI_FAVICON_PATH | APPLICATION_FAVICON_PATH |
| EMAIL_SMTP_HOST | SMTP_HOST |
| EMAIL_SMTP_PORT | SMTP_PORT |
| MMG_DB_WALLET_PATH | WALLET_LOCATION |
| MMG_DB_TNS_ADMIN_PATH | TNS_ADMIN_PATH |
| MMG_DB_SCHEMA_WALLET_ALIAS | WALLET_ALIAS |
| GRAPH_DB_SERVER_NAME | MMG_DB_SERVER_NAME |
| GRAPH_DB_PORT | MMG_DB_PORT |
| GRAPH_DB_SERVICE_NAME | MMG_DB_SERVICE_NAME |
| MMG_SERVICE_HOST | BE_HOSTNAME |
| MMG_SERVICE_PORT | BE_PORT |
| MMG_UI_PORT | UI_PORT |
| MMG_SCHEMA_CREATOR_PORT | SCHEMA_PORT |
| DATAPIPELINE_PIPELINE_UI_SERVICE_PORT | PIPELINE_UI_SERVICE_PORT |
| DATAPIPELINE_DATA_PIPELINE_UI_SERVICE_P
ORT | DATA_PIPELINE_UI_SERVICE_PORT |
| MMG_SSL_ENABLED | SSL_ENABLED |
| SSL_KEYSTORE_PATH | SSL_KEYSTORE |
| SSL_KEYSTORE_PASSWORD | SSL_KS_SECRET |
| SSL_KEYSTORE_TYPE | SSL_KS_TYPE |
| SSL_CERT_ALIAS | SSL_KS_ALIAS |
| AUTH_MMG_KEYS_DIR | MMG_KEYS_LOC |
| MMG_UI_AUTH_TYPE | UI_AUTH_TYPE |
| DATASTUDIO_AUTH_TYPE | STUDIO_AUTH_TYPE |
| MMG_SERVICE_AUTH_TYPE | BE_AUTH_TYPE |
| DATASTUDIO_SHOW_LOGIN | LOGIN_SHOW |
| DATASTUDIO_SESSION_MODE | SESSION_MODE |
| DATASTUDIO_AUTH_REALM | STUDIO_REALM |
| DATASTUDIO_AAI_URL | OFSAA_URL |
| DATASTUDIO_API_USERNAMES | API_USERS |
| DATASTUDIO_VALID_ROLES_LIST | VALID_ROLES |
| IS_USER_AUTHZ_FROM_AAI | AAI_AUTHZ_ENABLED |
| AUTH_AAI_AUTH_URL | AAI_AUTH_URL |
| AUTH_AAI_OAUTH_CLIENT_ID | AAI_CLIENT_ID |

Table 10-1 (Cont.) Configuration Property New and Old Names

| | |
|---------------------------------------|------------------------------|
| AUTH_AAI_OAUTH_CLIENT_SECRET | AAI_CLIENT_SECRET |
| AUTH_AAI_COOKIE_DOMAIN | AAI_COOKIE_DOMAIN |
| AUTH_SAML_IDP_URL | SAML_IDP_URL |
| AUTH_SAML_SP_ENTITY_URL | SAML_SP_ENTITY |
| AUTH_SAML_ACS_URL | SAML_SRV_URL |
| AUTH_SAML_LOGOUT_URL | SAML_LOGOUT_URL |
| AUTH_SAML_SIGN_AUTHN_REQ | SAML_SIGN_AUTHN_REQ |
| AUTH_SAML_SP_KEY_PATH | SAML_PRIVATE_KEY_PATH |
| AUTH_SAML_SP_X509_CERT_PATH | SAML_SP_X509_CERT_PATH |
| AUTH_SAML_SIGN_ALGORITHM | SAML_SIGN_ALGORITHM |
| AUTH_SAML_BINDING_TYPE | AUTH_SAML_REQUEST_TYPE |
| AUTH_SAML_INCLUDE_SP_CERT | AUTH_SAML_INCLUDE_SP_CERT |
| AUTH_SAML_DS_ISSUER | SAML_ISSUER |
| AUTH_SAML_DS_DESTINATION | SAML_DESTINATION |
| AUTH_SAML_DS_ASSERTION_CONSUMER_URL | SAML_ASSERTION |
| AUTH_SAML_DS_ROLE_ATTRIBUTE | SAML_ROLE_ATTRIBUTE |
| AUTH_SAML_DS_STUDIO_LOGOUT_URL | SAML_STUDIO_LOGOUT_URL |
| AUTH_SAML_DS_COOKIE_DOMAIN | SAML_COOKIE_DOMAIN |
| AUTH_LDAP_URL | LDAP_URL |
| AUTH_LDAP_SEARCH_BASE_DN | LDAP_SEARCH_BASE |
| AUTH_LDAP_USER_FILTER | LDAP_USER_FILTER |
| AUTH_LDAP_USER_SEARCH_FILTER | LDAP_USER_SEARCH_FILTER |
| AUTH_LDAP_GROUP_FILTER | LDAP_GROUP_SEARCH_FILTER |
| AUTH_LDAP_GROUP_BASE_DN | LDAP_GROUP_SEARCH_BASE |
| AUTH_LDAP_GROUP_MEMBER_ATTR | LDAP_GROUP_MEMBER |
| DATASTUDIO_SERVER_COOKIE_DOMAIN | SERVER_COOKIE_DOMAIN |
| DATASTUDIO_SERVER_COOKIE_NAME | SERVER_COOKIE_NAME |
| DATASTUDIO_SERVER_COOKIE_TIMEOUT | SERVER_COOKIE_TIMEOUT |
| DATASTUDIO_SERVER_COOKIE_IS_SECURE | SERVER_COOKIE_IS_SECURE |
| MMG_HTTP_CLIENT_MAX_CONN | MMG_HTTP_MAX_CONN |
| MMG_HTTP_CLIENT_MAX_CONN_PER_ROUTE | MMG_HTTP_MAX_CONN_PER_ROUTE |
| MMG_HTTP_CLIENT_CONN_TIMEOUT_MS | MMG_HTTP_CONNECT_TIMEOUT |
| MMG_HTTP_CLIENT_READ_TIMEOUT_MS | MMG_HTTP_READ_TIMEOUT |
| MMG_CONFIG_DATASOURCE_MAX_POOL_SIZE | MMG_DATASOURCE_MAX_POOL_SIZE |
| MMG_CONFIG_DATASOURCE_MIN_IDLE | MMG_DATASOURCE_MINIMUM_IDLE |
| MMG_CONFIG_DATASOURCE_IDLE_TIMEOUT_MS | MMG_DATASOURCE_IDLE_TIMEOUT |
| MMG_CONFIG_DATASOURCE_CONN_TIMEOUT_MS | MMG_DATASOURCE_CONN_TIMEOUT |
| MMG_EXT_DATASOURCE_MAX_POOL_SIZE | EXT_DATASOURCE_MAX_POOL_SIZE |
| MMG_EXT_DATASOURCE_MIN_IDLE | EXT_DATASOURCE_MINIMUM_IDLE |
| MMG_EXT_DATASOURCE_IDLE_TIMEOUT_MS | EXT_DATASOURCE_IDLE_TIMEOUT |
| MMG_EXT_DATASOURCE_CONN_TIMEOUT_MS | EXT_DATASOURCE_CONN_TIMEOUT |
| DATASTUDIO_LOG_LEVEL | STUDIO_LOG_LEVEL |
| DATASTUDIO_PYTHON_BINARY | PYTHON_HOME |

Table 10-1 (Cont.) Configuration Property New and Old Names

| | |
|--|------------------------------------|
| MMG_PYTHON_INTERPRETER_LIST | MMG_PYTHON_INTERPRETER |
| DATASTUDIO_R_ENABLED | R_ENABLED |
| DATASTUDIO_R_PYTHON_BINARY | R_PYTHON_HOME |
| DATASTUDIO_SPARK_ENABLED | MMG_SPARK_ENABLED |
| DATASTUDIO_SPARK_HOME | SPARK_HOME |
| DATASTUDIO_HADOOP_HOME | HADOOP_HOME |
| DATASTUDIO_SPARK_MASTER | SPARK_MASTER |
| DATASTUDIO_SPARK_DEPLOY_MODE | SPARK_DEPLOY_MODE |
| CS_AUTH_SERVICE_URL | AUTH_SERVICE_URL |
| CS_META_SERVICE_URL | META_SERVICE_URL |
| CS_ER_SERVICE_URL | ER_SERVICE_URL |
| CS_BATCH_SERVICE_URL | BATCH_SERVICE_URL |
| CS_TEMPLATE_CONFIG_PATH | TEMPLATE_CONFIG_PATH |
| CS_TEMPLATE_DEFAULT_LINK | TEMPLATE_DEFAULT_LINK |
| CS_MATCHRULE_BASE_URL | MATCHRULE_BASE_URL |
| CS_LOADGRAPH_BASE_URL | LOADGRAPH_BASE_URL |
| CS_MATCHSRVC_UI_URL | MATCHSRVC_UI_URL |
| GRAPH_LOAD_INDEX_UI_URL | LOADINDEX_UI_URL |
| GRAPH_MATCHING_MECHANISM | MATCHING_MECHANISM |
| GRAPH_CANDIDATE_SELECTION_SERVICE_URL | CANDIDATE_SELECTION_SERVICE_URL |
| GRAPH_LOAD_TO_OS_URL | LOAD_TO_OS_URL |
| GRAPH_MAX_TOTAL_SHARED_DATA_MEMORY_SIZE | MAX_TOTAL_SHARED_DATA_MEMORY_SIZE |
| GRAPH_MAX_TOTAL_PRIVATE_DATA_MEMORY_SIZE | MAX_TOTAL_PRIVATE_DATA_MEMORY_SIZE |
| GRAPH_MAX_PER_SESSION_DATA_MEMORY_SIZE | MAX_PER_SESSION_DATA_MEMORY_SIZE |
| GRAPH_MAX_DATA_MEMORY_SIZE_DSUSRGRP | MAX_DATA_MEMORY_SIZE_DSUSRGRP |
| GRAPH_MAX_DATA_MEMORY_SIZE_DSBATCH | MAX_DATA_MEMORY_SIZE_DSBATCH |
| GRAPH_MAX_DATA_MEMORY_SIZE_DSINTER | MAX_DATA_MEMORY_SIZE_DSINTER |
| GRAPH_MAX_DATA_MEMORY_SIZE_DSAPPROVER | MAX_DATA_MEMORY_SIZE_DSAPPROVER |
| GRAPH_MAX_DATA_MEMORY_SIZE_DSUSER | MAX_DATA_MEMORY_SIZE_DSUSER |
| GRAPH_MAX_DATA_MEMORY_SIZE_IHUSRGRP | MAX_DATA_MEMORY_SIZE_IHUSRGRP |

Appendix I - List of Supported Timezones

The following table provides a list of the supported timezones and the corresponding display names in the application:

| Timezone ID | Display Name |
|----------------------|-------------------------------------|
| Africa/Algiers | (GMT+1:00) CET Africa/Algiers |
| Africa/Cairo | (GMT+2:00) EET Africa/Cairo |
| Africa/Casablanca | (GMT0:00) WET Africa/Casablanca |
| Africa/Djibouti | (GMT+3:00) EAT Africa/Djibouti |
| Africa/Johannesburg | (GMT+2:00) SAST Africa/Johannesburg |
| Africa/Khartoum | (GMT+2:00) CAT Africa/Khartoum |
| Africa/Mogadishu | (GMT+3:00) EAT Africa/Mogadishu |
| Africa/Nouakchott | (GMT0:00) GMT Africa/Nouakchott |
| Africa/Tripoli | (GMT+2:00) EET Africa/Tripoli |
| Africa/Tunis | (GMT+1:00) CET Africa/Tunis |
| America/Anchorage | (GMT-9:00) AKST America/Anchorage |
| America/Bogota | (GMT-5:00) COT America/Bogota |
| America/Caracas | (GMT-4:00) VET America/Caracas |
| America/Chicago | (GMT-6:00) CST America/Chicago |
| America/Costa_Rica | (GMT-6:00) CST America/Costa_Rica |
| America/Denver | (GMT-7:00) MST America/Denver |
| America/Edmonton | (GMT-7:00) MST America/Edmonton |
| America/El_Salvador | (GMT-6:00) CST America/El_Salvador |
| America/Guatemala | (GMT-6:00) CST America/Guatemala |
| America/Halifax | (GMT-4:00) AST America/Halifax |
| America/Indianapolis | (GMT-5:00) EST America/Indianapolis |
| America/Lima | (GMT-5:00) PET America/Lima |
| America/Los_Angeles | (GMT-8:00) PST America/Los_Angeles |
| America/Managua | (GMT-6:00) CST America/Managua |
| America/Mazatlan | (GMT-7:00) MST America/Mazatlan |
| America/Mexico_City | (GMT-6:00) CST America/Mexico_City |
| America/Montreal | (GMT-5:00) EST America/Montreal |
| America/New_York | (GMT-5:00) EST America/New_York |
| America/Panama | (GMT-5:00) EST America/Panama |
| America/Phoenix | (GMT-7:00) MST America/Phoenix |
| America/Puerto_Rico | (GMT-4:00) AST America/Puerto_Rico |
| America/Regina | (GMT-6:00) CST America/Regina |
| America/Santiago | (GMT-4:00) CLT America/Santiago |
| America/Sao_Paulo | (GMT-3:00) BRT America/Sao_Paulo |
| America/St_Johns | (GMT-3:30) NST America/St_Johns |
| America/Tijuana | (GMT-8:00) PST America/Tijuana |
| America/Vancouver | (GMT-8:00) PST America/Vancouver |
| America/Winnipeg | (GMT-6:00) CST America/Winnipeg |

| | |
|--------------------|-------------------------------------|
| Asia/Aden | (GMT+3:00) AST Asia/Aden |
| Asia/Almaty | (GMT+6:00) ALMT Asia/Almaty |
| Asia/Amman | (GMT+2:00) EET Asia/Amman |
| Asia/Baghdad | (GMT+3:00) AST Asia/Baghdad |
| Asia/Bahrain | (GMT+3:00) AST Asia/Bahrain |
| Asia/Bangkok | (GMT+7:00) ICT Asia/Bangkok |
| Asia/Beirut | (GMT+2:00) EET Asia/Beirut |
| Asia/Calcutta | (GMT+5:30) IST Asia/Calcutta |
| Asia/Dacca | (GMT+6:00) BDT Asia/Dacca |
| Asia/Damascus | (GMT+2:00) EET Asia/Damascus |
| Asia/Dubai | (GMT+4:00) GST Asia/Dubai |
| Asia/Hong_Kong | (GMT+8:00) HKT Asia/Hong_Kong |
| Asia/Irkutsk | (GMT+8:00) IRKT Asia/Irkutsk |
| Asia/Jakarta | (GMT+7:00) WIB Asia/Jakarta |
| Asia/Jerusalem | (GMT+2:00) IST Asia/Jerusalem |
| Asia/Kamchatka | (GMT+12:00) PETT Asia/Kamchatka |
| Asia/Krasnoyarsk | (GMT+7:00) KRAT Asia/Krasnoyarsk |
| Asia/Kuala_Lumpur | (GMT+8:00) MYT Asia/Kuala_Lumpur |
| Asia/Kuwait | (GMT+3:00) AST Asia/Kuwait |
| Asia/Magadan | (GMT+11:00) MAGT Asia/Magadan |
| Asia/Muscat | (GMT+4:00) GST Asia/Muscat |
| Asia/Nicosia | (GMT+2:00) EET Asia/Nicosia |
| Asia/Novosibirsk | (GMT+7:00) NOVT Asia/Novosibirsk |
| Asia/Qatar | (GMT+3:00) AST Asia/Qatar |
| Asia/Riyadh | (GMT+3:00) AST Asia/Riyadh |
| Asia/Saigon | (GMT+7:00) ICT Asia/Saigon |
| Asia/Seoul | (GMT+9:00) KST Asia/Seoul |
| Asia/Shanghai | (GMT+8:00) CST Asia/Shanghai |
| Asia/Singapore | (GMT+8:00) SGT Asia/Singapore |
| Asia/Taipei | (GMT+8:00) CST Asia/Taipei |
| Asia/Tashkent | (GMT+5:00) UZT Asia/Tashkent |
| Asia/Tokyo | (GMT+9:00) JST Asia/Tokyo |
| Asia/Vladivostok | (GMT+10:00) VLAT Asia/Vladivostok |
| Asia/Yakutsk | (GMT+9:00) YAKT Asia/Yakutsk |
| Asia/Yekaterinburg | (GMT+5:00) YEKT Asia/Yekaterinburg |
| Atlantic/Azores | (GMT-1:00) AZOT Atlantic/Azores |
| Atlantic/Reykjavik | (GMT0:00) GMT Atlantic/Reykjavik |
| Australia/Adelaide | (GMT+9:30) ACST Australia/Adelaide |
| Australia/Brisbane | (GMT+10:00) AEST Australia/Brisbane |
| Australia/Darwin | (GMT+9:30) ACST Australia/Darwin |
| Australia/Hobart | (GMT+10:00) AEST Australia/Hobart |
| Australia/Perth | (GMT+8:00) AWST Australia/Perth |
| Australia/Sydney | (GMT+10:00) AEST Australia/Sydney |
| Europe/Amsterdam | (GMT+1:00) CET Europe/Amsterdam |
| Europe/Athens | (GMT+2:00) EET Europe/Athens |
| Europe/Berlin | (GMT+1:00) CET Europe/Berlin |
| Europe/Brussels | (GMT+1:00) CET Europe/Brussels |
| Europe/Budapest | (GMT+1:00) CET Europe/Budapest |

| | |
|-------------------|-----------------------------------|
| Europe/Copenhagen | (GMT+1:00) CET Europe/Copenhagen |
| Europe/Dublin | (GMT0:00) GMT Europe/Dublin |
| Europe/Istanbul | (GMT+3:00) TRT Europe/Istanbul |
| Europe/Lisbon | (GMT0:00) WET Europe/Lisbon |
| Europe/London | (GMT0:00) GMT Europe/London |
| Europe/Luxembourg | (GMT+1:00) CET Europe/Luxembourg |
| Europe/Madrid | (GMT+1:00) CET Europe/Madrid |
| Europe/Moscow | (GMT+3:00) MSK Europe/Moscow |
| Europe/Oslo | (GMT+1:00) CET Europe/Oslo |
| Europe/Paris | (GMT+1:00) CET Europe/Paris |
| Europe/Prague | (GMT+1:00) CET Europe/Prague |
| Europe/Rome | (GMT+1:00) CET Europe/Rome |
| Europe/Sofia | (GMT+2:00) EET Europe/Sofia |
| Europe/Stockholm | (GMT+1:00) CET Europe/Stockholm |
| Europe/Vienna | (GMT+1:00) CET Europe/Vienna |
| Europe/Warsaw | (GMT+1:00) CET Europe/Warsaw |
| Europe/Zurich | (GMT+1:00) CET Europe/Zurich |
| Pacific/Auckland | (GMT+12:00) NZST Pacific/Auckland |
| Pacific/Honolulu | (GMT-10:00) HST Pacific/Honolulu |
| Pacific/Pago_Pago | (GMT-11:00) SST Pacific/Pago_Pago |
| UTC | UTC |
