

Oracle® Financial Services

Profitability Analytics Cloud Service User Guide



Release 26B
G55869-01
May 2026

ORACLE®

Copyright © 2022, 2026, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1 About This Content

2 Getting Started

Welcome to Oracle Cloud	1
About Oracle Cloud	1
Supported Web Browsers	2
Order Oracle Cloud Applications	2
Getting Started with Profitability Analytics Cloud Service	2
Create and Activate New Cloud Account	3
Add to an Existing Oracle Cloud Account	5
Accessing the Cloud Account	5
Creating Co-Administrator Users	5
Subscribing to a Disaster Recovery Infrastructure Region	6
Create an Environment	6
Access Oracle Identity and Access Management	8
Activate Application User Account	8
Configuring Session Timeout	9
How to configure Session Lifetime Timeout?	10
Introduction to Admin Console	10
Accessing Admin Console	11
System Configuration	12
Metering	12
Component Details	13
Audit Trail Report	14
Configurations	15
Reports For Download	16
Prerequisites	16
Access Reports for Download	16
Data Reporting - Data View	16
View the Report Details	17
Apply a Custom Filter to the Data View	17
Allowing Domains to Receive Email Notifications	17
Identity Management	18

Users Summary Page	19
User Details	19
Mapped/Unmapped Groups	20
Available Groups	20
Groups Summary Page	21
Group Details	21
Mapped/Unmapped Roles	21
Available Roles	22
Create custom groups	22
Roles Summary Page	22
Roles Details	23
Mapped/Unmapped Functions	23
Available Functions	24
Functions Summary Page	24
Function Details	24
Folders Summary Page	25
Folder Details	25
Editing Folder Details	25

3 System Administration

Managing Application Users	1
User Summary- Application Users	1
Creating New Application Users	2
Creating a New User Group	3
Assign Groups to Users	4
Bulk Import Application Users	5
Managing User Groups	6
Map Application to the User Groups	6
Map Users to Groups	6
Map Roles to User Group	7
Unmap User from Groups	8
User Management	8
Application Users	8
User Roles and Privileges	8
Role Based Access Control	10
User Roles and Activities	10
User Groups	11
Analytics Menu Access Privileges	12
Application Menu Access Privileges	16

4 Dimension Management

Object Security	1
Components of Dimension Management	1
Attributes	1
Attribute Summary Page	2
Navigating Attribute Summary Page	2
Creating Attribute Definition	2
Managing Attribute Definitions	3
Viewing Attribute Definition	4
Modifying Attribute Definition	4
Copying Attribute Definition	4
Deleting Attribute Definition	5
Dimensions and Associated Attributes	5
Members	6
Member Summary Page	6
Creating Member Definitions	7
Managing Member Definitions	8
Viewing Member Definition Details	8
Editing Member Definition Details	8
Copying Member Definition Details	9
Deleting Member Definition Details	9
Hierarchy	9
Hierarchy Summary Page	9
Navigating Hierarchy Summary Page	10
Creating Hierarchy Definitions	10
Audit Info	13
Managing Hierarchy Definitions	13
Viewing Hierarchy Definition Details	13
Editing Hierarchy Definition Details	14
Copying Hierarchy Definition Details	14
Deleting Hierarchy Definition Details	14
Viewing Data in a Summary Page	14
Searching Summary	14
Sorting a Summary Page	15
Setting Number of Records per Page	15

5 Data Management Tools

Data Maintenance Interface	1
Access the Data Maintenance Interface	5
User Role Mapping and Access Rights	6

Form Builder	7
Creating New Forms in Form Builder	8
Approving and Rejecting New Form Definitions	16
Managing Form Definitions	17
Viewing Form Definitions	17
Editing/Amending Form Definitions	17
Copying Form Definitions	18
Deleting Form Definitions	18
Data Entry	18
Viewing Data Entry	19
Adding Data to Table – Forms Created Using Data Entry	19
Forms Created Using Excel Upload	22
Approving and Rejecting Records	22
Exporting Data Exporter Form Definitions	23
Perform Excel Re-upload on an Approved Excel Form Definition	24
Adding DMI Tasks in Scheduler Service	26
Dynamically export relevant records	27
Balance Reconciliation	27
Reconciliation Definition	28
Adding a New Reconciliation Definition	29
Reconciliation Balance	30
Actions Performed on Reconciliation Definition	31
Duplicate Runs for Same As-of-Date	34
Balance Reconciliation Audit Report	35
Default Attributes	36
Reconciliation using Batch Process	38
Data Housekeeping	40
Create Data Housekeeping Policy	42
Create Drop Partition Policy	43
Create Archive Policy	46
Create Delete Policy	49
Create Nullify Policy	52
Authorize a Policy	57
Withdraw a Policy	58
Data Level Security	59
Data Redaction	61
Redaction Functions	61
Redaction Policies	62
View redaction policies	62
Create redaction policies	63
Modify a redaction policy	64
Drop a redaction policy	64

Refresh a redaction policy	64
Redaction Approval	64
Data Retention	65
Actions Performed on Data Retention	68
Data Foundation Integration	69
User Group for Managing Data Foundation Integration	69
Data Services Subscription	70
Add a Subscription	71
Edit a Subscription	77
Refresh the Extension from DFCS	78
ADS Run History	79
Create and Execute Batch	80
List of Seeded Data File Specifications	85

7 Maintenance

Preferences	1
Global Preferences	1
Application Preferences	2
Batch Parameters	4
Financial Element Mapping	5
Navigation in the Summary Screen	5
Search	6
Financial Element Mapping Summary Table	7
Adding a Financial Element Mapping	8
Segmentation Mapping	10
Navigation in the Summary Screen	10
Search	10
Segmentation Mapping Summary Table	11
Creating a Segmentation Mapping	13
Line Item Display Order	17
Geography Mapping	19
Metrics Generator	22
Creating a New Management Ledger Metric	24
Creating a New Instrument Metric	25
Machine Learning Churn Model Properties	27

8 Operations and Processes

Scheduler Services	1
Accessing Scheduler Services	1
User Roles and Functions	2

Scheduler Service Dashboard	2
Define Batch	2
Creating a Batch/Batch Group	3
Editing a Batch/Batch Group	5
Copying a Batch/Batch Group	5
Deleting a Batch/Batch Group	5
Pinning/Unpinning a Batch/Batch Group	6
Define Tasks	6
Adding a Task	7
Modifying a Task	8
Define Task Precedence	9
Deleting a Task	9
Schedule Batch	10
Execute Batch/Batch Group	10
Adding Pre-Conditions For Batch Group Execution	10
Edit Dynamic Parameters	11
Scheduling and Automating Batch/Batch Group Execution	12
Re-run Batch/Batch Group	15
Re-start Batch/Batch Group	15
Monitor Batch/Batch Group	16
Scheduler Configuration	17
Batch to User Configuration	17
General Configuration	18
Schedule Rule	20
Appendix A: Understanding Batch Job Scheduling and Daylight Saving Time (DST)	21
Object Migration	22
Migration Object Types	23
Accessing Object Export and Object Import Features	26
Export Object	26
Creating Export Definitions	27
Editing Export Object Definitions	28
Exporting Object Definition	28
Viewing Export Object Details	28
Re-exporting Object Definitions	29
View Object Definition Export Log Details	29
Downloading Dump File	30
Deleting Export Object Definition	30
Import Object	30
Creating Object Import Definitions	31
Editing Import Definitions	32
Importing Object Definitions	33
Re-importing Object Definitions	34

Viewing Import Object Details	34
Viewing Object Import Log Details	35
Deleting Import Definition	35
Changing Object Ownership	35

9 Precursor to Analytics

Financial Element Hierarchy and Mapping for Custom Hierarchies	1
Functional Currency for Reporting	2

10 Analytics

Access Business Intelligence (BI) Reports	1
SQL Query Browser	2
Operational Analysis	6
Dimensions Registry	7
Currency Rates	7
Segment Registry	7
Data Quality Checks	8
File Uploads	14
Groups and Roles	17
Tables and Partitions	21
Runchart Execution	24
Data Level Security Registry	25
Usage Metering	27
Management Reporting	28
Management Ledger Based Reporting	28
Report Common Filters	29
In canvas Variable Prompts	31
Report Data Action	32
Top Down Summary	36
Time	40
Detailed IS	43
Detailed BS	47
Defined Org Unit	48
Profitability Insights	51
Instrument Level Aggregation and Insights	52
Report Common Filters	52
In canvas Variable Prompts	55
Report Data Action	56
Org Unit	58
Product	62

Region	66
Time	70
Detailed Income Statement	71
Channel Canvas	72
Other Insights	73
Customer Profitability	76
Instrument Level Aggregation and Insights	77
Report Common Filters	77
In-canvas Variable Prompts	79
Customer Details Canvas	79
Customer Life Time Value	84
Customer vs Segment	86
Segment Comparator	89
Segment Analysis	93
Segment Income Statement	98
RM Profitability	100
Inter-Segment Movement	103
Customer Group Details	105
Geography Profitability	109
Report Common Filters	110
Summary Tab	113
Key Business Metrics Tab	114
Key Performance Metrics Tab	116
Other Ratios	118
Instrument Custom Metrics	120
Report Filters	121
In canvas Variable Prompts	123
Instrument Custom Metrics Canvas	124
Management Ledger Custom Metrics	125
Report Filters	125
In canvas Variable Prompts	127
Management Ledger Custom Metrics Canvas	128
Retail Joint Accounts	129
Report Common Filters	129
In-canvas Variable Prompts	130
Retail Joint Accounts Canvas	131
Customer: Summary Information	131
Customer: Join Account Share	132
Key Performance Metrics	132
Balance Metrics	133
Other Ratios	133
Creating Adhoc Reports and Analysis	134

Amend Out-of-the-Box Reports	134
Ad-hoc Analysis Folder	136
Working with Out-of-the-Box Subject Area	137
Migrating Analytics Content between Tenants	138

11 Technical Documents

Run Chart	1
Data Flow	1
Customer Master Loader	1
Customer Hierarchy Loader	3
Retail Joint Accounts Loader	4
Reporting Data Model	5

1

About This Content

This guide provides information on the Oracle Financial Services Profitability Analytics Cloud Service (OFS PACS).

Audience

This guide is intended for the users of Oracle Financial Services Profitability Analytics Cloud Service (OFS PACS).

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc>.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info> or visit <http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs> if you are hearing impaired.

Related Resources

See these Oracle resources:

- [Oracle Financial Services Profitability and Balance Sheet Management Cloud Service](#)
- [Oracle Financial Services Profitability Analytics Cloud Service](#)
- [Licensing Information User Manual](#)

Conventions

The following text conventions are used in this document.

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

2

Getting Started

This chapter covers the Oracle Cloud, followed by Profitability Management Cloud Service and the instructions to get started with the cloud service, and instructions to use the Admin Console.

Topics:

- [Getting Started with Oracle Cloud](#): Oracle Cloud is the industry's broadest and most integrated cloud provider, with deployment options ranging from the public cloud to your data center. Oracle Cloud offers best-in-class services across Software as a Service (SaaS), Platform as a Service (PaaS), and Infrastructure as a Service (IaaS).
- [Profitability Analytics Cloud Service](#): The Financial Services Profitability Analytics Cloud Service enables Banks and other Financial Services institutions to identify profitable and potentially profitable portfolios, accounts, and customer relationships and understand its enablers. Top Down Reporting from Management Ledger and Bottom Up reporting from instrument tables for different user roles is supported. Key elements of BI content include Strategic Insights around Org Unit, Product, and Customer including account and segment level profitability.
- [Introduction to Admin Console](#): Use the Admin Console to perform System Configuration and Identity Management. It is a single point of access to manage identity functions and view administrative features such as Metering, Audit Trail Report and other miscellaneous configuration details in the Profitability and Balance Sheet Management Cloud Service (PBSMCS).

Welcome to Oracle Cloud

Oracle Cloud is the industry's broadest and most integrated cloud provider, with deployment options ranging from the public cloud to your data center.

Oracle Cloud offers best-in-class services across Software as a Service (SaaS), Platform as a Service (PaaS), and Infrastructure as a Service (IaaS).

About Oracle Cloud

Oracle Cloud is one of the few cloud providers that can offer a complete set of cloud services to meet all your enterprise computing needs.

Use Oracle Infrastructure as a Service (IaaS) offering to quickly set up the virtual machines, storage, and networking capabilities you need to run just about any kind of workload. Your infrastructure is managed, hosted, and supported by Oracle.

Use Oracle Platform as a Service offerings to provision ready-to-use environments for your enterprise IT and development teams, so they can build and deploy applications, based on proven Oracle databases and application servers.

Use Oracle Software as a Service (SaaS) offerings to run your business from the Cloud. Oracle offers cloud-based solutions for Human Capital Management, Enterprise Resource Planning, Supply Chain Management, and many other applications, all managed, hosted, and supported by Oracle.

Supported Web Browsers

Oracle Financial Services Cloud Services support the latest version of the following major browsers:

- Google Chrome
- Microsoft Edge
- Mozilla Firefox

For more details, see [Oracle Software Web Browser Support Policy](#).

When sharing a link to a document or folder, users of Microsoft Edge need to use the Show Link button and copy the link shown in the dialog.

Order Oracle Cloud Applications

You can order Oracle Cloud Applications (Software as a Service) offerings by contacting Oracle Sales. After your order is processed, you can then activate your services.

To order a subscription to Oracle Cloud Applications:

1. Go to the [Oracle Financial Services Risk and Finance solutions](#) page.
2. Scroll down and select **Profitability Analytics**.
3. Review the features and capabilities of the service and read the Datasheet.
4. When you are ready to order, scroll up and click **Request a Demo**.
5. You can either write an email or click **Request Now** to receive a call from Sales.
6. Enter your **Business email**, select the confirmation check box, and click **Continue**.
7. Provide a description of your need and click **Request Now**.


Later, after you have worked with Oracle Sales to order the Oracle Cloud Application best suited to your requirements, you will receive an email, which contains a link you can use to activate the service you have ordered.

To know how to activate, see [Create and Activate New Cloud Account](#).

Getting Started with Profitability Analytics Cloud Service

To get started, you must activate the Profitability Analytics Cloud Service (PACS). After activating the Cloud Service, you can onboard Application Users to use the subscribed Cloud Services.

Figure 2-1 Illustration of the Cloud Subscription Workflow

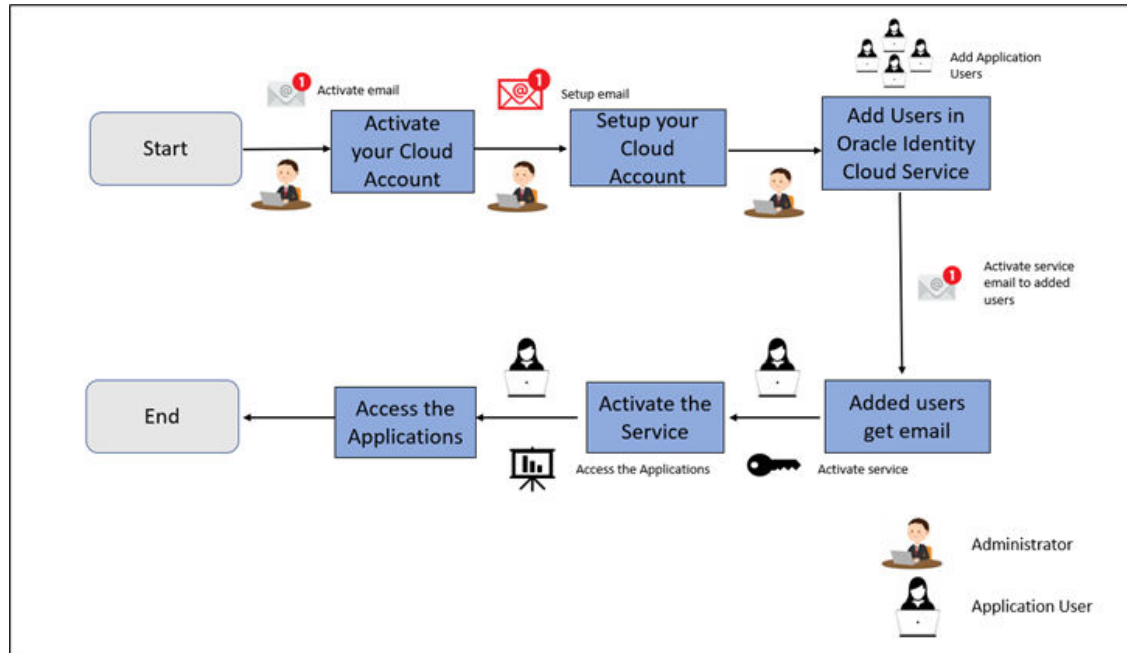

To get started, you must activate the subscribed Cloud Service.

After activating the cloud service, you can log in as an administrator and perform the following tasks.

- [Create and Activate New Cloud Account](#)
- [Access the Cloud Account](#)
- [Access Oracle Identity and Access Management \(IAM\) Console](#)
- [Onboard new application users](#) for the subscribed cloud services.

After the administrator successfully adds an application user, they can log in and [activate their cloud account](#) and use the subscribed cloud services provisioned by the administrator.

Choosing Between a New or Existing Cloud Account

Every administrator in a cloud account (tenancy) has access to all subscriptions within that account. To ensure that new administrators cannot access existing subscriptions, you should activate new subscriptions in a separate tenancy by [creating a new Oracle Cloud Account](#). If separate access controls are not needed, you may [add new subscriptions to an existing Oracle Cloud Account](#).

Create and Activate New Cloud Account

After you subscribe to the cloud service, you will receive a **Welcome to Oracle Cloud** email with details to create and activate your cloud account.

To create and activate a new cloud account:

1. Click **Create New Cloud Account** in the email.
2. Complete the **New Cloud Account Information** to sign up.

Figure 2-2 New Cloud Account Information page

3. Enter the following details:

- **First Name** and the **Last Name** of the person who will be the cloud administrator.
- **Email** address of the person who will be the cloud administrator. Instructions to log into the new Oracle Cloud Account will be sent to this email address.
- **Password** to access the new cloud account.
- **Tenancy Name**: New **Tenancy Name** to be associated with the cloud account.

Note

You cannot modify the tenancy name after it is created. Hence, ensure to provide a valid tenancy name, based on your organization's requirements and naming conventions.

- **Home Region**: Select the **Home Region**, where the account is located. Check the service availability before selecting the home region. For assistance regarding home region selection, contact Oracle support. Existing customers have to ensure that the identity resources are located in the home region.

Note

You can subscribe to additional regions but you cannot modify the home region, after provisioning your tenancy.

4. Click **Create Tenancy** to access the **New Cloud Creation Confirmation** page.

After successful activation, the cloud account administrator will receive a **Get Started Now with Oracle Cloud** email.

Add to an Existing Oracle Cloud Account

If you already have a cloud account associated with your administrator user name, you can add the newly subscribed cloud service to that account.

To add an existing Cloud account:

1. In the welcome email, click **Add** to add an existing cloud account.
2. Perform the steps as mentioned in the [Access the Oracle Cloud Infrastructure Identity and Access Management \(IAM\) console](#).

Accessing the Cloud Account

An Administrator can access the Cloud Account activated and associated with their email address.

After your new cloud account is created and activated, you will receive a **Get Started Now with Oracle Cloud** email, to the email address provided while creating the account.

To access your Cloud account:

1. In the **Get Started Now with Oracle Cloud** email, click **Sign In**.
2. Enter the **Tenancy** name and click **Continue**.
3. Enter the **Username** and **Password** to log in to the **OCI Console**.

Use the same **Username** and the **Password** that you provided during activation setup.

4. After successful login, proceed with the [multi-factor authentication](#). Select the configured authentication mode and enter the OTP generated using the [Oracle Mobile Authenticator application](#).

Once the MFA is successfully completed, you can access the **Environment Page**.

Creating Co-Administrator Users

After you log in to the IAM console, the first task is to create additional user accounts.

You should assign specific user groups to the user accounts that you are creating. There are seeded user groups available with the respective services, users must be mapped to one or more of the user groups, depending on the role that they perform. For example, you can create a user for each member of your team. Each member can then sign into the account with their credentials. You can also assign each user to specific user groups and apply specific security policies or roles to each group. You can create the users and map the users to groups for your service. After creating the users, the users will receive a Welcome email. The users must activate their accounts and enter a new password to access the services.

Note

A co-administrator will have the same privileges as the existing administrator.

To create a co-administrator user in the IAM Console:

1. In the IAM Console, select **Domains** (Identity domain) to view the list existing domains.
2. Click the required **Domain Name**, to access the **Domain Details** page.

3. In the left pane, click **Users** and select **Create user**, to proceed with the user creation.
4. Enter the following details:
 - **First Name, Last Name** and a valid **Username** and the **Email ID**.

Note

- The username should be alphanumeric and cannot exceed 20 characters. You can enter only hyphen (-) and underscore (_) as special characters.
- Uncheck the **Use the email address as the username** check box, as you can only set the username as the login ID and currently setting the email address as the login ID is not supported.

5. Select the **Administrator Group**.

Note

After a user logs in to a specific cloud service, the user to user-group mapping created in the **IAM Console** will onboard into the master and mapping tables. Later, if you deselect (remove) a user from a group in **Assign User to Groups** after provisioning, ensure that you also unmap the user from the corresponding user-group in the **Admin Console**. This is a mandatory step to complete the unmapping process.

6. After entering the required information, click **Create** to create and add the new user to the [User Summary](#).
7. You can also [batch import several users](#) using a .CSV file.

Subscribing to a Disaster Recovery Infrastructure Region

In Oracle Cloud Infrastructure (OCI), a Disaster Recovery (DR) region is a secondary, geographically separate region that helps ensure service continuity.

To maintain high availability, you must subscribe to a DR region as part of your disaster recovery strategy.

For information on how to subscribe to a DR Infrastructure region, see [Subscribing to an Infrastructure Region](#).

Create an Environment

After logging into the Oracle Cloud Infrastructure Console, an Administrator can create one or multiple environments/instances for different user groups.

To create an environment/instance:

1. Log in to **Oracle Cloud Infrastructure Console (OCI)**.

You can view the list of all the environments (instances) provisioned for the one or multiple cloud applications, with the following details:

- **Name:** The cloud application's instance name.
- **Type:** The instance type.

- **Life cycle status:** The instance status.
 - **Region:** The region from where the specific instance is active.
 - **Application URL:** The URL to access the instance.
2. From **My Applications**, click the application in which you want to create an environment.
 3. On the **Overview** page, click **Environments**.
 4. From the **Compartments** drop-down list, select the compartment in which you want to create an environment.
 5. From the **Domain** drop-down list, select the domain in which you wish to create an environment.

To use a custom domain, ensure that the custom domain is created before creating the environment. For more information, see the [Creating Custom Domain](#) section.

6. Select **Subscription ID** for your cloud service.
Click **Show Subscription details** to view the details of all the subscription of your service.
7. (Optional). Select the **Region** to host the OCI environment/instance, from the drop-down list.

If you are not sure about the region, contact [My Oracle Support \(MoS\)](#).

Note

You can select the region only for the first environment/subscription and for the additionally added instances, the region cannot be modified.

8. Enter the following **Environment Details**:
 - **Name:** The name of the new environment or instance.

Note

You cannot modify the environment name after the environment is created. Hence, ensure to provide a valid environment name, based on your organization's requirements and naming conventions.

- **Admin user name:** The user name of administrator.
- **Instance type:** Select one of the following instances:
 - **Production:** If the environment is used for Production activities.
 - **Non-production:** If the environment is used for testing and development purposes. For example, a sandbox environment.
- **Admin email:** The administrator email ID used to log in to the Cloud Console. You can also enter a different email ID that needs to be part of the cloud tenancy. For more details, see [Managing Users](#).
- **Admin first name** and **Admin last name:** The first and last names of the Administrator.
- (Optional) Navigate to **Advanced Options** section and select Compartment and Domain from Compartments and Identity Domains tab. To use a custom domain, ensure that the custom domain is created before creating the environment. For more information, see the [Creating Custom Domain](#) section.

The environment details are added to the Oracle Cloud Infrastructure Classic Console under the **Environments** tab. It may take a few hours for the status to change to Active. If there are any issues, you can raise a service ticket with [My Oracle Support \(MoS\)](#).

9. Click **Create**

After the environment is set to **Active**, click the environment name to view the **Environment details**. Click the Service console URL under **Environment Information** to create users and groups.

Access Oracle Identity and Access Management

Oracle Cloud Infrastructure Identity and Access Management (IAM) provides identity and access management features such as authentication, single sign-on (SSO), and identity life cycle management for Oracle Cloud as well as Oracle and non-Oracle applications, whether SaaS, cloud-hosted, or on-premises. Employees, business partners, and customers can access applications at any time, from anywhere, and on any device in a secure manner.

IAM integrates with existing identity stores, external identity providers, and applications across cloud and on-premises to facilitate easy access for end users. It provides the security platform for Oracle Cloud, which allows users to securely and easily access, develop, and deploy business applications such as Oracle Human Capital Management (HCM) and Oracle Sales Cloud, and platform services such as Oracle Java Cloud Service, Oracle Business Intelligence (BI) Cloud Service, and others.

Administrators and users can use IAM to help them effectively and securely create, manage, and use a cloud-based identity management environment without worrying about setting up any infrastructure or platform details.

To add users to your Cloud Services, navigate to the **Oracle Identity and Access Management (IAM)** Console.

To access the **IAM** Console:

1. Log in to [Cloud.Oracle.com](#), to view all the details pertaining to your cloud order.
Access the service link from the console to start using your subscriber cloud service.
2. Enter the **Cloud Account Name** and click **Next** to access the **IAM Console**.
3. Click **Change tenancy** option if you want to use a different tenancy.
4. Ensure that the displayed identity domain matches the expected value.
5. Log in with your **Username** and **Password**.

As an Administrator, you can [create and manage users with different access rights to the Cloud Service](#).

For example, the IAM Administrator has superuser privileges for an Oracle Identity and Access Management Domain. This administrator can create users, groups, group memberships, and so on.

Activate Application User Account

A user provisioned by their administrator can use the specific cloud services they have subscribed to.

When an administrator completes provisioning an application user, the user receives an account activation email from Oracle.

To log in and activate your application user account:

1. Open the email received from Oracle and review the information about your service in the email.
2. Click **Activate Your Account**. You will be prompted to change your password on the initial log in.
3. Enter your new credentials in the **Reset Password** window to activate your account. After the password is successfully reset, a **Congratulations** message is displayed.
4. Access the Application URL shared by the administrator.
5. Enter your credentials to sign in to your account and access the **Welcome Page**.

Configuring Session Timeout

Session timeout automatically signs you out of a logged in session after a set time period, for various reasons such as inactive session for a specific time frame.

After you complete your tasks, you can sign out of your application. However, sometimes you might get automatically signed out due to session timeouts.

When you sign in using your credentials, you are authenticated to use the application, and a session is established. But, for security purposes, your session is configured to be active for a predefined duration, which is called the session timeout period. Your sessions can expire due to various reasons, such as an inactive session for a specific time period. In such cases, you are automatically signed out of the application. Your timeout periods may vary on certain pages. For example, you may observe a longer timeout period on pages that automatically refresh or user portal/tabs that open in separate windows or tabs.

The various session timeouts and the configuration details are as follows:

Timeout Type	Description	Configuration	Timeout Duration
Session Lifetime Timeout	After authenticating to the application, your current session remains active for a predefined duration, referred to as the session lifetime timeout period. Your session ends after this period, even if you're using the application.	Yes	8 Hours (Default value)
Inactive Session Timeout	After authenticating to the application, if your session is idle or inactive for a specific time, the System automatically terminates the session, and you are signed out of the session.	No	60 Minutes

Timeout Type	Description	Configurable	Timeout Duration
Browser Inactivity Timeout	After authenticating to the application, if your browser session is idle or inactive for a specific time, the System automatically terminates the session, and you are signed out of the session.	No	60 Minutes

How to configure Session Lifetime Timeout?

You can configure the Session Lifetime Timeout using your Identity Domain Settings in OCI Console.

Ensure that you have the Security Administrator Role mapped to access and modify the settings.

To configure the session timeout:

- 1. Log in with your **Security Administrator Account**.
- 2. Navigate to the Domain page. Click **Settings** and select **Session Settings**.
- 3. Specify the **Session Duration** under **Session Limits**. Enter the required value. By default, this is set to 480 Minutes.

Figure 2-3 Session Settings



Introduction to Admin Console

Use the Admin Console to perform System Configuration and Identity Management.

[Admin Console](#) is the single point of access to manage identity functions and view administrative features such as Metering, Audit Trail Report and other miscellaneous configuration details in the Cloud Service.

The Admin Console has been updated for an improved user experience.

Accessing Admin Console

Access Admin Console from the home page of Financial Services Analytical Applications.

To access the Admin Console, ensure that the cloud administrator grants you administrative privileges by mapping your user account to the Identity Administrator and Identity Authorizer user groups. These user groups are seeded in Oracle Identity and Access Management (IAM).

Before logging into the Admin Console, ensure that:

Note

- If the Cloud Administrator has granted only Identity Management privileges and no other cloud application privilege, you will be automatically redirected to the Admin Console specific to subscribed cloud service, after a successful login.
- After a user signs in to the Cloud Service, the user to user-group Mapping created in the IAM Console will onboard into the Master and Mapping Tables. If you [unmap a user from a group](#) in the Admin Console, go to the IAM Console and open the **Assign User to Groups**. Unselect the user corresponding to the user group and click **Finish**. This step is mandatory to unmap the user.

To access the Admin Console:

1. Enter the application URL in the browser's address bar to access the Oracle Cloud Account Sign In page.
2. Enter the username and password on the Login page to log in to the **Financial Services Analytical Applications**.

After successfully logging in, you can view the **Financial Services Analytical Applications** homepage and the list of subscribed cloud applications. Click **Navigation** to hide the Applications Navigation List.

3. Click **Admin Console** at the top of the Financial Services Analytical Applications home page.

In the Admin Console, you can view the **System Configuration** and **Identity Management** tabs. Use these tabs to perform the following tasks:

- **Administrator Tasks:**
 - View the **Metering Report**, **Audit Trial Report**, **Object Storage**, and **Object Authentication (OAUTH)** credential details in the **System Configuration** tab.
 - Perform the Identity and Access Management operations in the **Identity Management** tab.
- **Authorizer Tasks:**
 - Authorize the Identity and Access Management Operations in the **Identity Management** tab.

Role-Based Access

Access to Admin Console functionalities is controlled through role-based function mappings. The System Configuration and Identity Management options are displayed only if the user has the corresponding role and function mapping assigned (as shown in the table below). You can customize access to each Admin Console functionality by assigning

appropriate role-function mappings. As a result, each administrator may have access only to specific functionalities based on their assigned role.

Admin Console functionality	Required Function Code/ Function Name	Required Role Code (Role Name)
System Configuration Tile	ADMIN_SYS_UI (Admin System Config Tile)	ADMIN_SYS_UI (Admin System Config Tile Role)
Identity Management Tile	ADMIN_IDNTY_UI (Admin Identity Config Tile)	ADMIN_IDNTY_UI (Admin Config Tile Role)
Configurations	ADMN_CONFIG_UI (Admin Configuration Viewer)	ADMN_CONFIG_UI (Admin Configuration Viewer Role)
Component Details	ADMN_COMPONENT_UI (Admin Component Details Viewer)	ADMN_COMPONENT_UI (Admin Component Details Viewer Role)
User Report	ADMN_USR_REPORT_UI (Admin User Report Viewer)	ADMN_USR_REPORT_UI (Admin User Report Viewer Role)
Audit Report	ADMN_AUDIT_UI (Admin Audit Report Viewer)	ADMN_AUDIT_UI (Admin Audit Report Viewer Role)
Notifications Broadcast	ADMN_NOTIF_SEND_UI (Admin Notification Broadcast Viewer)	ADMN_NOTIF_SEND_UI (Admin Notification Broadcast Viewer Role)

System Configuration

Administrators can monitor the usage of service units and user activities through the System Configuration.

With System Configuration, administrators can view the consumption of service units. You can also view the following:

- The Audit Report to see what actions the users have performed in the application and when they have performed them
- The provisioned object storage details and the OAuth authentication details
- The production instance URL and the email ID of the login user

The components are as follows:

- **Metering:** Click **Metering** to view the usage of services using the Metering Report.
- **Audit Trail Report:** Click **Audit Trail Report** to view details such as the user's login and logout information, the action they performed, the status of the actions, and the date and time of each action.
- **Component Details:** Click **Component Details** to view details such as the Object Storage, Pre-Authenticated Request (PAR) URL, and OAuth authentication details.
- **Configurations:** Click **Configurations** to specify the instance name and the user(s) who receive emails related to operations tasks.

Metering

View annual usage of transactions and report types.

Use the **Metering** page to view the annual unit usage of the number of transactions and the number of report types within your cloud service.

The following table shows the methodology employed to measure the usage of each of the products.

Table 2-1 Metering Methodology

Product	Metering Methodology
Profitability and Balance Sheet Management Base	Per 100k Records Processed
Cash Flow Engine	Per 100k Records Processed
Funds Transfer Pricing	Per 100k Records Processed
Profitability Management	Per 100k Records Processed
Asset Liability Management	Per 100k Records Processed
Profitability Analytics	Per Hosted Named User

Component Details

Use Component Details to view the object storage standard and archive details, and OAUTH authentication details.

Object storage is used for data to which you require fast, immediate, and frequent access. Archive storage is used for data which you do not access regularly but must be retained and preserved for long periods of time.

With every instance of the application provisioned, two buckets are provisioned: a standard storage bucket and an archive storage bucket. The data files that you want to load into the application for processing must be uploaded to the standard storage bucket. The files are automatically moved to the archive storage bucket after a period of 7 days.

To access Component Details:

1. Login to the Admin Console.
2. Go to the **System Configuration** tab and click **Component Details**.

You can access the following tabs from the Component Details tab:

- **OCI Console** : Access the **OCI Console URL** from the **OCI Console** tab.
- **Object Storage Standard** : When you provision an instance of the application, two buckets, a standard storage bucket and an archive storage bucket are automatically provisioned. The objects data that you want to load into the application for processing must be uploaded to the standard storage bucket.
Access and copy the following details related to the objects which are currently in use and require fast, immediate, and frequent access.
 - **Object Store Bucket Name**: The logical container in which objects are stored
 - **Pre-Authenticated URL (PAR URL)**: Request that enables you to access a bucket without providing any credentials
- **Object Storage Archive** : Archive storage is used for storing objects that are not actively in use but need to be retained and preserved for extended periods. Objects are automatically moved from standard to archive storage after 7 days.
Access and copy the following details related to the archived objects.
 - **Object Store Bucket Name**: The logical container in which objects are stored
 - **Pre-Authenticated URL (PAR URL)**: Request that enables you to access a bucket without providing any credentials

- **OAuth Creds** : Use OAuth credentials (Client ID and Client secret) are used for implementing authentication in cloud services.
Access and copy the following OAuth credentials:
 - **OAuth Client ID**: ID of the OAuth client used for OAuth authentication performed by IAM during any API calls.
 - **OAuth Client Secret**: Password of the OAuth client secret used for OAuth authentication performed by IAM during any API calls

Audit Trail Report

Use the Audit Trail Report to check user activities, including logins, added actions, their status, and associated machine names.

To generate an Audit Trail Report:

1. Log in to the **Admin Console**.
2. Go to **System Configuration** and click **Audit Trail Report** to access the **Audit Trail Report** page.
3. Enter the following values and click **Search** to generate the **Audit Trail Report** for all users or a specific user, to view a specific audit trail report.

Table 2-2 Audit Trail Report Filters

Field	Description
User Name	Enter or Search for a user name to view the report for the selected user.
Action	Select the Action from the list of actions to generate a report for a specific action.
From Date	Select the start date for the report.
To Date	Select the end date for the report.
Action Detail	Enter the string to search and filter the audit trail report for a specific action.

You can get the following details from an **Audit Trail Report**.

Table 2-3 Audit Trail Report Details

Field	Description
User Name	The user name selected in the User Name filter field.
Action Details	The action selected in the Action Detail filter field.
Action Code	The type of action performed by the user.
Status	The status of the action performed. The values are Successful or Failure .
Action Subtype	The sub type of the action.
Operation Time	The date and time of the action performed.

4. To download the report, click **Download** and select your preferred file format (PDF or Excel). The report will be saved automatically to your system's default download folder.

5. Click **Reset** to clear all values from the filter fields and enter new search criteria.

Configurations

Use the Configurations page to update user preferences, master encryption key, notification preferences, and allowed email domains.

You can set the user preferences such as time zone and locale, master encryption key, notification configuration details, and update allowed email domains using the **Configurations** page.

To update the configuration details from the **System Configuration** tab:

1. Click the **Configurations** tile, to view and edit the user preferences, master encryption key and the notification details.
2. Click the required tab and modify the details.

-
- [Preferences](#)
 - [Master Encryption Key](#)
 - [Notification Configuration](#)
 - [Email Domains](#)
 - [IDCS Sync Details](#)

Preferences

Select the following details in the **Preferences** tab and click **Save** to update the details.

- **Time Zone** - The time zone displayed in the application.
- **Locale** - The language to access the application. The default value is **en - US English**.
- **Date Format** - The format in which the date is displayed.

Master Encryption Key

Enter the **Master Encryption key** and click **Save** to update the key value.

Notification Configuration

Enter the number of days after which the notification will be deleted automatically, and click **Save**.

Email Domains

Enter the allowed email domains, and click **Save**. Separate domains with commas, omitting the '@' symbol. Example: oracle.com, gmail.com.

Note

Only users with the domains specified here will receive email notifications. To allow all domains, leave the field blank.

IDCS Sync Details

By default, the **Enable Group Sync** option is turned off. Turn it on if you want the application to remove user-to-group assignments based on Oracle IAM/IDCS updates. After you enable it, the application automatically unmaps any custom application groups that do not exist in IAM/IDCS. This setting keeps user and group mappings fully synchronized with Oracle IAM/IDCS.

Reports For Download

The Reports for Download tile in the Admin Console consists of a set of pre-defined and pre-configured reports that are available for download. You can use the functions in the interface such as filter and sort to segregate the data and drill down to the details of the reports. You can then investigate the information, analyze, and export the data in CSV format.

In the Admin Console, you can download reports from Reports for Download in the System Configuration tab.

Prerequisites

To use Reports for Download from the Admin Console, your user profile must be mapped to the Data Maintenance Admin group to access the Reports for Download menu.

Access Reports for Download

To access the Data View window, click **Reports for Download** in the **System Configuration** tab. The **Data Reporting - Data View Page** is displayed.

Data Reporting - Data View

You can view the list of reports available for download, from the Data Entry window. Use one of the following criteria to view various reports.

- To search reports, click the Search field to display the search criteria pop-up. Enter search terms in the Name, Description, or Created By fields, or use a combination of the fields, and click Search.
The search result displays reports that match the criteria.
- To sort reports, click the Sort By drop-down and select from the options: Name, Description, or Created By.
The reports are displayed in ascending order for the selected option.
- To view the report creation and modification details, click the More Options (three dots) icon of a report to display the pop-up with the details for the following:
 - **Created By** - Displays the User ID of the user who created the report.
 - **Created Date** - Displays the date and time of the creation of the report.
 - **Last Modified By** - Displays the User ID of the user who last modified the report.
 - **Last Modified Date** - Displays the date and time of the last modification of the report.
 - **Authorizer** - Displays the User ID of the authorizer who approved the report to be displayed in the window.
 - **Authorizer Comments** - Displays the comments entered by the authorizer when approving the report to be displayed in the window.

- To view a report, mouse over the record, and the hidden menu appears. Click View from the menu.
The details for the selected report are displayed in the Data Entry window.

View the Report Details

The Data Entry window is the interface where you can apply filter conditions (optional) on the reports and export the details.

You can apply the filter conditions (optional) to the reports in the Attributes Selection tab, and the results are displayed in the Data Preview tab from where you can export the report in the CSV format.

The procedure to view report details is described as follows:

1. In the **Data View** window, click **Attributes Selection**.
The Attributes Selection tab displays the details for the database table name in View Name and the table columns in Attribute Name. Expand View Name to display the columns in Attribute Name.
2. Click **Apply**.
The Data Preview tab displays the report details. The number of records displayed in the Data Preview tab is pre-configured in the system. However, you can export the details in the CSV format by clicking Download CSV.

Apply a Custom Filter to the Data View

In addition to the reports that you can view, you can also use the filter provided in the Data View window to custom filter the data in the reports for analysis purposes.

To apply a custom filter to the data view, follow these steps:

1. Click **Launch Filter** Condition to display the Filter Condition window.
2. Select **AND** or **OR** from the drop-down.
3. Select the required report column from **Select a Column**.
4. Select the required condition from **Select a Condition**.
5. Click **+ Condition** to add more conditions and click **+ Group** to add more groups.
Repeat the selection procedure to add details. To remove a condition or group, click Remove.
6. Click **Apply** in the **Filter Condition** window to save the custom filter condition.
7. Click **Apply** in the **Attributes Selection** tab.

The Data Preview tab displays the results of the Attributes filtered in the Attributes Selection tab. The number of records displayed in the preview is pre-configured in the system. However, you can export the details in the CSV format by clicking Download CSV.

Allowing Domains to Receive Email Notifications

The application sends email notifications from the following domain. To receive these notifications, you must add this domain to your Allow List: no-reply-fsgbu-erfplatform@ps1.erf.<region>.ocs.oraclecloud.com

Replace <region> with the value appropriate for your region. Contact Support for details.

Identity Management

Using Identity Management, administrators can manage fine-grained and coarse-grained entitlements. Coarse-grained entitlements consist of fewer functions than fine-grained entitlements. Authorizers can authorize the entitlement mappings.

The various **components** of Identity Management are:

- **Users:** A user is a person who has access to **Admin Console** and can perform specific actions based on the user group or groups they are mapped to. Before you can map a user to a user group, your Administrator must have created and authorized the user. After the user is authorized, they are added in the [Users Summary](#). Click **Users** to access the **Users Summary** page.
- **Groups:** Groups are a set of users who can perform specific activities. For example, the administrator role performs administrative activities. Any user who belongs to a specific user group can access the roles mapped to that user group. To add a user group, click **Add** in the **Groups** tile. Click **Groups** to view the list of user groups in [Groups Summary](#).
- **Roles:** Roles are a set of functions grouped together and having specific privileges. Any user who belongs to a specific role can access functions mapped to that role. Click **Add** to add a role or click **Roles** to view the list of roles in **Roles Summary**. To add a user role, click **Add** in the **Roles** tile. Click **Roles** to view the list of user groups in [Roles Summary](#).
- **Folders:** Folders are used to control access rights on defined list of objects. They are mapped to a specific Information Domain. Click **Folders** to view the list of folders and edit the access rights in [Folders Summary](#).
- **Functions:** Functions enable users to perform a specific activity. Any user who belongs to a specific function can access the folders mapped to the function. Click **Functions** to view the list of functions in [Functions Summary](#).

Note

Only those user groups and roles which are authorized are displayed in the **Groups Summary** page and **Roles Summary** page, respectively.

Use the following guidelines to manage user creation and group mappings between IDCS/OCI and the Admin Console.

- Create users only in IDCS/OCI.
- You can map users to groups in IDCS/OCI, in the Admin Console, or in both. The system automatically syncs user-to-group mappings from IDCS/OCI to the Admin Console, but not the other way around.
- To unmap a user from a group, manually remove the mapping in both IDCS/OCI and the Admin Console.

Note

Just-in-Time (JIT) provisioning occurs when a user logs in. Therefore, user groups appear in the Admin Console only after they are associated with a user who has logged in at least once. To map groups to roles before associating them with users in Oracle IAM/IDCS, you must create the corresponding group in the Admin Console as well as in Oracle IAM/IDCS. This applies only to custom groups. Application-seeded groups are automatically available in both Oracle IAM/IDCS and the application.

Users Summary Page

The Users Summary page shows the list of available users. You can view the details of a user and map the user to one or more user groups.

To access the Users Summary page:

1. Click **Identity Management** tab in the **Admin Console** page.
2. Click the **Users** tile to access the **Users Summary** page.
3. Select a specific user name in the **Users Summary** page and then click **Details** to view the associated **User ID** and **User Name**.
4. Select a user name and click **Mapped Groups** to view the list of groups that are mapped to the particular user.

To map/unmap a user group, refer to [Mapped and Unmapped Groups](#).

To search for a specific user, type the first few letters of the user name that you want to search in the Search box and click **Search**. The results will show users matching your input.

At the bottom of the page, adjust the number of entries displayed per page using the up and down arrows in the Records box. To navigate between pages in the View bar, use these buttons:

- **First page** to go to the first page.
- **Previous page** to go back.
- **Next page** to move to the next page.
- **Last page** to go to the last page.

You can directly navigate to a specific page by entering its number in the View bar and pressing **Enter**.

User Details

In the User Details, you'll find the User ID and User Name of the selected user from the User Summary page.

- Click a specific user listed in the **User Summary** page and then click **Details** to view the **User ID** and the **User Name** of that user.

Mapped/Unmapped Groups

As an Administrator, you can map/unmap a user to/from a user group from the **Users Summary** page.

To map/unmap a user to a user group:

1. Select the user name in the **Users Summary** page.
2. Select **Mapped Groups** to access the list of groups mapped to the selected user.
3. To map a user group:
 - a. Click **New Mapping**.
The list of user groups you can map the user to appears in the **Available Groups** page.
 - b. Click **Map**.
A confirmation message is displayed after successful mapping. The mapping will be completed after authorization.
4. To unmap a user group:
 - a. Select the check box corresponding to a user group or click **Select All** to choose all available user groups.
 - b. Click **Unmap**.
A confirmation message will be displayed after successful unmapping. The unmapping will be completed after authorization.
5. After mapping/unmapping a user group, ensure to authorize it accordingly. To authorize a mapping/unmapping:
 - a. In **Mapped Groups**, select the user-user group mapping or unmapping that requires authorization. Each identity object displays the current status of its mapping. The status can be one of the following:
 - Approved
 - Waiting for Mapping
 - Waiting for Unmapping
 - b. Click **Authorize/Reject** to approve or cancel the mapping/unmapping request.
6. Click on **New Mapping** and then switch to **Authorization View** to retrieve the pending authorization.

Note

Any other user from the requestor is required to authorize any new mapping requests.

Available Groups

Click **New Mapping** to view the list of user groups you can map to the user.

To select a user group, select the check box corresponding to the user group. To select all user groups, click **Select All**.

Groups Summary Page

The Groups Summary page shows the list of available groups. You can view the details of a group and map the group to one or more user roles.

To access the Groups Summary page:

1. Click the **Identity Management** tab in the **Admin Console** page.
2. Click the **Groups** tile, to access the **Groups Summary** page.
3. Select a specific group name in the **Groups Summary** page and then click **Details** to view the associated **Group ID**, **Group Name** and [Group Description](#).
4. Select a group name and click **Mapped Roles** to view the list of roles that are mapped to the particular group.

To map/unmap roles, refer to [mapped/unmapped roles](#).

To search for a specific user group, type the first few letters of the user group name that you want to search in the Search box and click **Search**. The results will show users matching your input.

At the bottom of the page, adjust the number of entries displayed per page using the up and down arrows in the Records box. Use the navigation buttons, to go to the first page, last page, previous page and next page. You can also directly navigate to a specific page by entering its number in the View bar and pressing **Enter**

Group Details

In the Group Details, you'll find the Group ID, Group Name, and Group Description of the selected user group.

- Click a specific group name listed in the **Group Summary** page and then click **Details** to view the **Group ID**, **Group Name**, and **Group Description** of that user group.

Mapped/Unmapped Roles

As an Administrator, you can map/unmap a role to/from a user group from the **Groups Summary** page.

To map/unmap roles to user groups:

1. Select the user group in the **Groups Summary** page.
2. Select **Mapped Roles** to access the list of roles mapped to the user group. Each identity object displays the current status of its mapping. The status can be one of the following:
 - Approved
 - Waiting for Mapping
 - Waiting for Unmapping
3. To map roles to user groups:
 - a. Click **New Mapping**.

The list of user roles you can map the group to is displayed in the **Available Roles** page.
 - b. Select the check box corresponding to a user role or click **Select All** to select all the available user roles.

- c. Click **Map**.
A confirmation message is displayed after successful mapping. The mapping will be completed after authorization.
4. To unmap roles from user groups:
 - a. Select the check box corresponding to a user role or click **Select All** to select all the available user roles.
 - b. Click **Unmap**.
A confirmation message is displayed after successful unmapping. The unmapping will be completed after authorization.
5. After mapping/unmapping a role, ensure to authorize it accordingly. To authorize a mapping/unmapping:
 - a. In **Mapped Roles**, select the role-user group mapping or unmapping that requires approval.
 - b. Click **Authorize/Reject** to approve or cancel the mapping/unmapping request.

Available Roles

Click New Mapping to view the list of roles you can map to the user group.

To select a role, select the check box corresponding to the role. To select all roles, select the check box marked **Select All**.

Create custom groups

You can create custom groups to cater to specific tasks within the application.

While seeded groups support a broader range of application and scenarios, custom groups enable the precise grouping of users for targeted and specialized application usage.

Example: You can create a user group which assigns the role of uploading files. This way you have a dedicated user or a standalone user that is not accessing the application but is just ingesting data.

You can create new groups using the following:

1. PBSM Admin Console

When you create a custom group in the PBSM Admin Console, you must also create the same group in the IDCS Admin Console and add the user to it for the group assignment to persist in PBSM across logins.

2. IDCS Admin Console

When you create a new group in IDCS Admin Console and map it to a user, this will automatically create the group in the application after the login.

After creating the group, assign the required permissions to it and add the roles. For information, see [Creating a New User Group](#).

Roles Summary Page

The Roles Summary page shows the list of available user roles. You can view the details of a role and map the role to one or more user functions.

To access the **Roles Summary** page:

1. Click the **Identity Management** tab in the **Admin Console** page.
2. Click the **Roles** tile, to view the **Roles Summary** page.
3. Select a specific role name in the **Roles Summary** page and then click **Details** to view the associated **Role Code**, **Role Name**, and [Role Details](#).
4. Select a role name and click **Mapped Functions** to view the list of functions that are mapped to the particular role.

You can also unmap a role from a specific function. To map/unmap functions, refer to [mapped/unmapped functions](#).

To search for a specific role, type the first few letters of the role name that you want to search in the Search box and click **Search**.

At the bottom of the page, adjust the number of entries displayed per page using the up and down arrows in the Records box. To navigate between pages in the View bar, use these buttons:

- **First page** to go to the first page.
- **Previous page** to go back.
- **Next page** to move to the next page.
- **Last page** to go to the last page.

You can directly navigate to a specific page by entering its number in the View bar and pressing **Enter**.

Roles Details

Access Roles Details, to view the Role Code, Role Name, and Role Description of the selected role.

- Click a specific role listed in the **Roles Summary** page and then click **Details** to view the **Role Code**, **Role Name**, and **Role Description** of that role.

Mapped/Unmapped Functions

As an Administrator, you can map/unmap a role to/from a function user group from the **Roles Summary** page.

To map/unmap roles to functions:

1. Select the role name in the **Roles Summary** page.
2. Select **Mapped Functions** to access the list of functions mapped to the specific role. Each identity object displays the current status of its mapping. The status can be one of the following:
 - Approved
 - Waiting for Mapping
 - Waiting for Unmapping
3. To map roles to functions:
 - a. Click **New Mapping**.

The list of user functions you can map the role to appears in the **Available Functions** page.

- b. Select the check box corresponding to a function or click **Select All** to select all the available functions.
 - c. Click **Map**.

A confirmation message is displayed after successful mapping. The mapping will be completed after authorization.
4. To unmap roles from functions
 - a. Select the check box corresponding to a function or click **Select All** to select all the available functions.
 - b. Click **Unmap**.

A confirmation message is displayed after successful unmapping. The unmapping will be completed after authorization.
5. After mapping/unmapping a function, ensure to authorize it accordingly. To authorize a mapping/unmapping:
 - a. In **Mapped Functions**, select the role-function mapping or unmapping that requires approval.
 - b. Click **Authorize/Reject** to approve or cancel the mapping/unmapping request.

Available Functions

Click **New Mapping** to view the list of functions that you can map to a role.

To select a function, select the check box corresponding to the function. To select all functions, click **Select All**.

Functions Summary Page

The **Functions Summary** page shows the list of available functions. You can view the function details.

To access the **Functions Summary** page:

1. Click the **Identity Management** tab in the **Admin Console** page.
2. Click the **Functions** tile to access the **Functions Summary** page.
3. Select a specific function name in the **Functions Summary** page and then click **Details** to view the associated **Function ID**, **Function Name**, and **Function Description**.

To search for a specific function, type the first few letters of the function name that you want to search in the search box and click **Search**.

At the bottom of the page, adjust the number of entries displayed per page using the up and down arrows in the **Records** box. Use the navigation buttons, to go to the first page, last page, previous page and next page. You can also directly navigate to a specific page by entering its number in the **View bar** and pressing **Enter**.

Function Details

Using the **Function Details** options, you can view the **Function ID**, **Function Name**, and **Function Description** from the **Functions Summary** page.

- Click a specific function listed in the **Functions Summary** page and then click **Details** to view the **Function ID**, **Function Name**, and the **Function Description** of that function.

Folders Summary Page

Create multiple folders, store objects and assign access rights based on the security level of the user.

The **Folders Summary** page shows the list of available groups. You can view the details of a group and map the group to one or more user roles.

To access the **Folders Summary** page:

1. Click **Identity Management** tab in the **Admin Console** page.
2. Click the **Folders** tile to access the **Folders Summary** page.

The **Folders Summary** page is displayed.

Select a specific folder name in the **Folders Summary** page and then click **Details** to view the associated **Folder ID**, **Folder Name** and **Folder Type**. For more information refer to [Folder Details](#)

To search for a specific folder, type the first few letters of the folder name that you want to search in the search box and click **Search**.

At the bottom of the page, adjust the number of entries displayed per page using the up and down arrows in the Records box. Use the navigation buttons, to go to the first page, last page, previous page and next page. You can also directly navigate to a specific page by entering its number in the View bar and pressing **Enter**.

Folder Details

In the Folder Details, you'll find the Folder ID, Folder Name, and Folder Type of the selected folder from the Folders Summary page.

- Click a specific folder name listed in the **Folders Summary** page and then click **Details** to view the **Folder ID**, **Folder Name**, and **Folder Type** of that user.

Editing Folder Details

You can edit the Folder Type from the folder details page.

1. Click **Edit** on the **Folder Details** page.
2. Set the Folder Type to one of the following options:
 - **Public** - These folders are accessible to all users.
 - **Private** - These folders can be viewed only by the users associated with that folder.
 - **Shared** - These folders can be accessed by users mapped to specific user groups. These user groups are mapped to specific roles that are associated with the folder.

3

System Administration

This chapter covers the following topics:

- [Users and Roles](#)
- [User Groups](#)
- [User Management](#)
- [Configuring Session Timeout](#)

Managing Application Users

An application user can access the subscribed cloud services, based on the roles and groups assigned to them

An administrator can create application users using IAM. They can also [batch import several users](#) using a .CSV file.

After users are created, they are synced from IAM to the Cloud Service.

You can map the application users to existing groups based on the roles that they require and their access levels. The access level provided to an application user is based on the following:

- **Groups:** Groups are seeded (available out-of-the-box) by your cloud service. Administrators can also create new groups in IAM. After groups are created, they are synced from IAM to the cloud service. You can map the groups to roles using the subscribed cloud service.
- **Roles:** Roles are seeded by the cloud service. Administrators can also create new roles using the cloud service and assign existing functions to these new roles.
- **Functions:** Functions are seeded by the cloud Service. Administrators cannot create new functions; however, they can use the existing functions.

User Summary- Application Users

View the list of existing application users in the User Summary.

You can view the details of a user and map the user to one or more user groups.

- To view the **User ID** and **Username** of the selected User - Select the **Username** in the **User Summary** page and select **Details**.
- To search for a specific User, type the first few letters of the required **Username** in the **Search** box and click **Search**.
- Using the navigation buttons at the bottom of the summary page, you can browse to the different pages. Also, you can enter the number of entries to be listed on a single page in the **Records** box or use the buttons to increase or decrease the number of entries.
- Enter the page number in the **View Bar Control** and jump to the required page.

Creating New Application Users

After you log in to the IAM console, the first task is to create additional user accounts.

You should assign specific user groups to the user accounts that you are creating. There are seeded user groups available with the respective services, users must be mapped to one or more of the user groups, depending on the role that they perform.

For example, you can create a user for each member of your team. Each member can then sign into the account with their credentials. You can also assign each user to specific user groups and apply specific security policies or roles to each group.

You can create the users and map the users to groups for your service. After creating the users, the users will receive a Welcome email. The users must activate their accounts and enter a new password to access the services.

To create users in the IAM Console:

1. In the IAM Console, select **Domains** (Identity domain) to view the list existing domains.
2. Click the required **Domain Name**, to access the **Domain Details** page.

Note

If you are using a custom domain, select the custom domain name before proceeding with the steps below. For more information, see the [Creating Custom Domain](#) section.

3. On the details page, perform one of the following actions depending on the option that you see:
 - Select the **User management** tab, and then go to the **User** section of the tab.
 - Under **Identity domain** on the left side of the page, select **Users**.
4. Under **Users** and select **Create**, to proceed with the user creation.
5. In the **First name** and **Last name** fields enter the user's name.
6. To have the user sign in with their email address, follow these steps:
 - a. Leave the **Use the email address as the username** checkbox selected.
 - b. In the **Username / Email** field, enter the email address for the user account.
7. To have the user sign in with their username, follow these steps:
 - a. Clear the **Use the email address as the username** checkbox.
 - b. Enter the unique name for the user. You cannot change this value later.

Note

The name must meet the following requirements: No spaces. Only Basic Latin letters (ASCII), numerals, hyphens, periods, underscores, +, and @.

- c. In the **Email** field, enter the email address for the user account.

Note

If the **Primary email address required** checkbox is selected on the **Domain settings** page, then you must provide an email address in the **Email** field to create the user account.

If the **Primary email address required** checkbox is not selected, then you can create the account without entering an email address in the **Email** field.

8. Select the user groups according to your user-specific groups or access, in the **Groups (Optional)**.

Note

After a user logs in to a specific cloud service, the user to user-group mapping created in the **IAM Console** will onboard into the master and mapping tables. Later, if you deselect (remove) a user from a group in **Assign User to Groups** after provisioning, ensure that you also unmap the user from the corresponding user-group in the **Admin Console**. This is a mandatory step to complete the unmapping process.

9. After entering the required information, click **Create** to create and add the new user to the [User Summary](#).

You can also [batch import several users](#) using a .CSV file.

Creating a New User Group

Create groups to manage user access to applications and resources.

To create a user group :

1. In the IAM Console, select **Domains** (Identity domain) to view the list existing domains.
2. Click the required **Domain Name**, to access the **Domain Details** page.

Note

If you are using a custom domain, select the custom domain name before proceeding with the steps below. For more information, see the [Creating Custom Domain](#) section.

3. On the details page, perform one of the following actions depending on the option that you see:
 - Select the **User management** tab, and then go to the **Groups** section of the tab.
 - Under Identity domain on the left side of the page, select Groups.
4. Under Groups select **Create group**.
5. Enter the **Group Name** and the **Group Description**.
6. Select **User can request access**, to allow users to request access to this group.
7. To add users to the group while creating the group, select the checkbox for each user that you want to add to the group.

Note

To search for a user, select the text box, enter all or part of the beginning of the username, first name, or last name of the user, and then press **Enter**.

8. (Optional) In the **Tags** section, add one or more tags to the group. If you have permissions to create a resource, then you also have permissions to apply free-form tags to that resource. To apply a defined tag, you must have permissions to use the tag namespace. If you're not sure whether to apply tags, skip this option or ask an administrator. You can apply tags later.
9. Click **Create** to create the new user group with the selected users.

After creating the user group, you must assign various permissions to the group, using one of the following methods:

- Write at least one policy to give group permission to either the tenancy or a compartment. While writing the policy, specify the group using the unique group name or the group's OCID.
- Assign the group to an application.

Assign Groups to Users

Assign a specific group to a user, based on the roles required for the user.

Ensure to [create a group](#), before assigning users to the group.

To map a user to a group using the IAM Console :

1. In the IAM Console, select **Domains** (Identity domain) to view the list existing domains.
2. Click the required **Domain Name**, to access the **Domain Details** page.

Note

If you are using a custom domain, select the custom domain name before proceeding with the steps below. For more information, see the [Creating Custom Domain](#) section.

3. On the details page, perform one of the following actions depending on the option that you see:
 - Select the **User management** tab.
 - Under Identity domain on the left side of the page, select **Groups**.
4. Find the **Groups** table listing and select the group to which to add users.
5. On the group details page, perform one of the following actions depending on the option that you see:
 - Select the **Users** tab.
 - Under Resources, select **Users**.
6. Click **Assign User to Groups** to view the list of available groups.
7. To add users to the group, select the checkbox for each user that you want to add to the group

Note

To search for a user, select the text box, enter all or part of the beginning of the username, first name, or last name of the user, and then press **Enter**.

8. After selecting all the required Groups, click **Add**.

The user is assigned to the selected groups. You can access the list of groups associated with a user, in the respective **User Details** page.

To dissociate an user from a group, select the group and click **Remove User from the Group**.

Bulk Import Application Users

As an administrator, you can batch import user accounts using a .CSV file.

Note

Before importing the user accounts, create a .CSV file that is properly formatted for the import.

To import user accounts :

1. In the IAM Console left pane, click **Users** and select **More Actions** and select **Import Users**.
2. Click **Browse** to locate and select the .CSV file containing the user accounts to import.

Note

Click **Download sample file** in the dialog box to download a sample file and perform the accounts upload.

3. Verify that the path and name of the selected .CSV is updated in the **Select a file to import**, and click **Import**.

Note

Oracle IAM cannot import a user account if a mandatory value such as user's first name, last name, or username, is missing. In such cases, Oracle IAM will skip the incomplete account and proceed to the next account in the .CSV file.

When Oracle IAM evaluates and imports the user accounts, the imported accounts are updated in the **Jobs**. You can also get information related to the successful/incomplete imports if the import was not completed due to system errors.

For information on how to import and export users, groups, and Oracle application roles into and out of an identity domain, see [Transferring Data](#).

Managing User Groups

User groups are seeded (available out-of-the-box) by the cloud service. Groups are mapped to roles using the cloud service by the same user that was created using IAM.

Administrators can also create new groups in IAM. After groups are created, they are synced from IAM to the cloud service. You can map the groups to roles using the subscribed cloud service.

For the complete list of Out-of-the-Box (OOTB) user groups available across all PBSM Cloud Services, see [Appendix A: OOTB User Groups](#).

Map Application to the User Groups

After creating a group, you can map the required applications with the group.

To map the application to a user group, log in to IAM and follow these steps:

1. Go to the Navigation menu in the enter the **Domains** in the Search bar to view the **Domains** list.
2. Select the **Domain** and then from the LHS menu,

Note

If you are using a custom domain, select the custom domain name before proceeding with the steps below. For more information, see the [Creating Custom Domain](#) section.

3. Select **Oracle Cloud Services** tab, to view the list of Cloud Services.
The screen displays the various Oracle Cloud Services.
4. Select the Cloud Services you are subscribed to (Syntax: **<Cloud_service_name>xxxx-prd** and **<Cloud_service_name>xxxx-nprd**, where **Description** is mentioned as your registered cloud service).
5. Select **Groups** and click **Assign Groups**.
6. Select the user and click **Assign**.

Map Users to Groups

Log in to IAM as an administrator, and map users to user groups.

To map a user to a user group:

1. Select the **User Name** in the **Users Summary**.
2. Select **Mapped Groups**.
3. Select the **User Group Name**.

Note

To select a user group, select the check-box corresponding to the user group. To select all user groups displayed on the page, select the check-box marked **Select All**.

4. Click **New Mapping** to map the user to the selected user group.

Or

Click **Unmap** to remove the user group-role mapping.

If you need to authorize an unmap request, refer to [Unmap User from Group](#).

Note

User-group mapping changes from IAM will take some time to sync with your Cloud Service. If these changes are made during the active user session, then it will be reflected on the next login.

After a user signs into the cloud service, the user to user-group mapping created in the IAM Console will onboard into the master and mapping tables. If you unmap a user from a group in the Admin Console, navigate to the associated console and open **Assign User to Groups**. Deselect the user corresponding to the user group and click **Finish**. This is a mandatory step to complete the unmapping process.

For more information, refer to [Unmap User from Group](#).

After you click **New Mapping**, the list of user groups you can map the user to appears in the **Available Groups Summary**.

5. Select a **User Group**.

Note

If the logged-in user has both administration and authorization entitlements, an authorization view toggle button is available. Enable this button to complete the authorization.

6. Click **Map**.

Note

If the logged-in user has both administration and authorization entitlements, an authorization view toggle button is available. Enable this button to complete the authorization.

Map Roles to User Group

You can map roles to a user group using Admin Console.

To map roles to the user group:

Before mapping the roles to an user group, ensure that the [roles are created in the Admin console](#).

1. From the **Identity Management** tab, Click **Groups** to access the **Groups Management** page.
2. Search for the specific group.
3. Click the **User Group** and click **New Mapping** under the **Mapped Roles** tab.
4. Search for required role names created in **Roles Management** and click **New Mapping** to map each role.
5. Log in as a user with the authorization role and authorize the mapped roles in the **Authorization View**.

A user group is created in the IAM Portal and is mapped to a role created in the Admin Console.

Unmap User from Groups

Unmap a user from a specific group to revoke the associated functions.

Log in to IAM as an administrator to authorize and unmap a user from a specific user group.

To authorize the unmapping of a user from a user group:

1. Click **Unmapped Groups**.
2. Click the **User Group Name** to select the User Group.
3. Click **Authorize** or **Reject** to approve or reject an unmapping request.

User Management

During implementation, you prepare your Oracle Application's Cloud Service for the Service Users. The decisions made during this phase determine how you manage users by default. Most of these decisions can be overridden. However, for efficient User Management, Oracle recommends that you configure your environment to reflect both enterprise policy and support most or all users.

For more information, see the [View List of Application Users](#) and [User Roles and Privileges](#).

Application Users

During implementation, you can use the Create User task to create Test Service Users. By default, this task creates a minimal person record and a user account. After implementation, you should use the Hire an Employee Task to create Service Users. The Create User Task is not recommended after the implementation is complete.

For more information, see [Create Application Users](#).

User Roles and Privileges

Oracle Financial Services Profitability Analytics Cloud Service (PACS) Users are assigned roles through which they gain access to functions and data. Users can have any number of roles.

The following figure shows User Personas and the tasks they can perform:

Table 3-1 Top-Down Personas and Tasks

PACS BI Data Steward	PACS BI - Management /CXO/Org Head	PACS BI Application	PACS BI - Regional Manager
Create Users	Set Preferences	Manage PACS Data	View OOTB Reports for Management Reporting and Profitability Insights
Map Users to OOB User Groups	View OOTB Reports for Management Reporting	Create new reports if required of existing RPD	Set Preferences
Create User Groups and Roles	Create Watch Lists	Manage Dimensions	Create Watch Lists
Map Roles to User Group	Add comments on charts	Review Process Logs	Add comments on charts
Admin Privileges to all modules	Add tolerance limits for measures	Manage Set Up Configurations	Add tolerance limits for measures
Manage Runchart and Batches	Create custom charts	Review PACS data integrity Create Mailing Lists	Create custom charts

Table 3-2 Bottom-Up Personas and Tasks

PACS BI Data Steward	PACS BI - Product Manager/Branch Manager	PACS BI Application Analyst	PACS BI - Regional Manager
Create Users	Set Preferences	Manage PACS Data	View OOTB Reports for Management Reporting and Profitability Insights
Map Users to OOB User Groups	View OOTB Reports for Management Reporting	Create new reports if required of existing RPD	Set Preferences
Create User Groups and Roles	Create Watch Lists	Manage Dimensions	Create Watch Lists
Map Roles to User Group	Add comments on charts	Review Process Logs	Add comments on charts
Admin Privileges to all modules	Add tolerance limits for measures	Manage Set Up Configurations	Add tolerance limits for measures
Manage Runchart and Batches	Create custom charts	Review PACS data integrity Create Mailing Lists	Create custom charts

Note

- User-Group mapping changes from IAM will take five minutes to sync with the application. If these changes are made during the active user session then it will be reflected on the next login.
- You can create and manage Application users as required. For example, you can map the Pipeline Admin Group and PACS Admin Group to one user.

Role Based Access Control

Role-based security in Oracle Financial Services Profitability Analytics Cloud Service Controls who can do what and to which data.

The following table provides examples of role-based access.

Table 3-3 Role Based Access Control

Role Assigned to a User	Functions which Users with this Role can Perform	Set of Data which Users with the Role can Access when performing the Function
Application Administrators	Manage RPD and Dimensions across reports along with Set Up Configurations. Manage data integrity and mailing lists.	Reports and RPD's associated with Top Down (Management Reporting) and Bottom Up (Profitability Insight and Customer Profitability reports). SetUp Configurations and SQL Query Browser
Business Users	Access to the Application to review reports. Access to Set Up Configurations UI's	Reports and RPD's associated with Top Down (Management Reporting) and Bottom Up (Profitability Insight and Customer Profitability reports).
Data Steward	Perform Application Administrator and data and dataflow Management activities	User Group with Business Tasks' Roles across all Service Features. Batch Management and Monitoring

User Roles and Activities

The following User Roles are seeded in the PBSM Cloud Service to facilitate the activities expected from the users mapped to the seeded User Groups:

- PACS BI TD - Management/CXO
- PACS BI TD - Regional Manager
- PACS BI TD - Org Head
- PACS BI TD - Application Analyst
- PACS BI TD - Data Steward
- PACS BI BU - Regional Manager
- PACS BI BU - Branch Manager
- PACS BI BU - Product Manager
- PACS BI BU - Application Analyst
- PACS BI BU - Data Steward

The user roles Profitability Analytics Application Analyst and Profitability Analytics Data Steward are required to access the main application for view, edit and other purposes, based on the User Persona accessing the same. An Analyst User Persona can view all PA Reports and edit RPD elements and create custom reports. Similarly, a Data Steward Persona can view and edit all PA Admin Screens along with screens relevant to batch scheduling monitoring and execution.

The Business User Roles like Management/ CXO/ Org Head/ Regional Manager/ Product Manager/ Branch Manager - are seeded BI Roles to be used for the users to access all the Analytics Menu, along with DV features along with all reporting in the PA Application.

Overall, these ten roles are created to facilitate Analytics access for five different types of User Persona. These roles can be mapped to any User Group to provide the Analytics access to users under the User Group.

User Groups

The following table lists the User Groups and the access privileges.

Table 3-4 Top Down Persona User Groups List

Top Down Persona	User Access Type	IAM UG CODE	Analytics Application Role
PACS BI TD – Management/CXO	R	UGPATDCXO	DV Consumer
PACS BI TD – Regional Manager	R	UGPATDRM	DV Consumer
PACS BI TD – Org Head	R	UGPATDHEAD	DV Consumer
PACS BI TD – Application Analyst	R/W	UGPATDAAN	DV Content Author
PACS BI TD – Data Steward	R/W	UGPATDADMIN	DV Content Author

Table 3-5 Bottom Up Persona User Groups List

Bottom Up Persona	User Access Type	IAM UG CODE	Analytics Application Role
PACS BI BU – Regional Manager	R	UGPABURM	DV Consumer
PACS BI BU -Branch Manager	R	UGPABUBM	DV Consumer
PACS BI BU -Product Manager	R	UGPABUPM	DV Consumer
PACS BI BU – Application Analyst	R/W	UGPABUAAN	DV Content Author
PACS BI BU – Data Steward	R/W	UGPABUADMIN	DV Content Author

Analytics Menu Access Privileges

Table 3-6 Analytics Menu Access Privileges

Level 1-Menu	Level 2-Menu	Level 3-Menu	Level 4-Menu	Management Reporting Persona	Profitability Insights Persona
Profitability Analytics Cloud Service	Analytics	BI Home Page		- PACS BI TD - Management/ CXO - PACS BI TD - Regional Manager - PACS BI TD - Org Head - PACS BI TD - Application Analyst - PACS BI TD - Data Steward	- PACS BI BU - Regional Manager - PACS BI BU - Branch Manager - PACS BI BU - Product Manager - PACS BI BU - Application Analyst - PACS BI BU - Data Steward
				- PACS BI TD - Application Analyst - PACS BI TD - Data Steward	- PACS BI BU - Application Analyst - PACS BI BU - Data Steward
			SQL Query Browser	- PACS BI TD - Application Analyst - PACS BI TD - Data Steward	- PACS BI BU - Application Analyst - PACS BI BU - Data Steward
		Operational Analysis	Dimensions Registry	- PACS BI TD - Application Analyst - PACS BI TD - Data Steward	- PACS BI BU - Application Analyst - PACS BI BU - Data Steward
				- PACS BI TD - Application Analyst - PACS BI TD - Data Steward	- PACS BI BU - Application Analyst - PACS BI BU - Data Steward
			Currency Rates	- PACS BI TD - Application Analyst - PACS BI TD - Data Steward	- PACS BI BU - Application Analyst - PACS BI BU - Data Steward
				- PACS BI TD - Application Analyst - PACS BI TD - Data Steward	- PACS BI BU - Application Analyst - PACS BI BU - Data Steward
			Data Quality Checks	- PACS BI TD - Application Analyst - PACS BI TD - Data Steward	- PACS BI BU - Application Analyst - PACS BI BU - Data Steward
				- PACS BI TD - Application Analyst - PACS BI TD - Data Steward	- PACS BI BU - Application Analyst - PACS BI BU - Data Steward

Table 3-6 (Cont.) Analytics Menu Access Privileges

Level 1-Menu	Level 2-Menu	Level 3-Menu	Level 4-Menu	Management Reporting Persona	Profitability Insights Persona
			Segment Registry	• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
			File Uploads	• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
			Groups and Roles	• PACS BI TD - Application Analyst • PACS BI TD - Data Steward • PACS BI TD - Management/ CXO • PACS BI TD - Regional Manager • PACS BI TD - Org Head • PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward • PACS BI BU - Regional Manager • PACS BI BU - Data Steward
		Management Reporting			

Table 3-6 (Cont.) Analytics Menu Access Privileges

Level 1-Menu	Level 2-Menu	Level 3-Menu	Level 4-Menu	Management Reporting Persona	Profitability Insights Persona
		Profitability Insights		• PACS BI TD - Management/ CXO • PACS BI TD - Regional Manager • PACS BI TD - Data Steward	• PACS BI BU - Regional Manager • PACS BI BU - Branch Manager • PACS BI BU - Product Manager • PACS BI BU - Application Analyst • PACS BI BU - Data Steward
		Customer Profitability		• PACS BI TD - Management/ CXO • PACS BI TD - Regional Manager • PACS BI TD - Data Steward	• PACS BI BU - Regional Manager • PACS BI BU - Branch Manager • PACS BI BU - Product Manager • PACS BI BU - Application Analyst • PACS BI BU - Data Steward

Table 3-6 (Cont.) Analytics Menu Access Privileges

Level 1-Menu	Level 2-Menu	Level 3-Menu	Level 4-Menu	Management Reporting Persona	Profitability Insights Persona
		Geography Profitability		• PACS BI TD - Management/ CXO • PACS BI TD - Regional Manager • PACS BI TD - Data Steward	• PACS BI BU - Regional Manager • PACS BI BU - Branch Manager • PACS BI BU - Product Manager • PACS BI BU - Application Analyst • PACS BI BU - Data Steward
		Custom Metrics		• PACS BI TD - Management/ CXO • PACS BI TD - Regional Manager • PACS BI TD - Org Head • PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Regional Manager • PACS BI BU - Branch Manager • PACS BI BU - Product Manager • PACS BI BU - Application Analyst • PACS BI BU - Data Steward

Application Menu Access Privileges

Table 3-7 Application Menu Access Privileges

Level 1 Menu	Level 2 Menu	Level 3 Menu	Management Reporting Persona	Profitability Insights Persona
Profitability Analytics Cloud Service	Operations And Processes		• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
			• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
	Dimension Management		• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
			• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
	Setup Configurations	Application Preferences	• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
		Batch Parameters	• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
		Financial Element Mapping	NA	• PACS BI BU - Regional Manager • PACS BI BU - Branch Manager • PACS BI BU - Product Manager • PACS BI BU - Application Analyst • PACS BI BU - Data Steward
		Segmentation Mapping	NA	• PACS BI BU - Regional Manager • PACS BI BU - Branch Manager • PACS BI BU - Product Manager • PACS BI BU - Application Analyst • PACS BI BU - Data Steward

Table 3-7 (Cont.) Application Menu Access Privileges

Level 1 Menu	Level 2 Menu	Level 3 Menu	Management Reporting Persona	Profitability Insights Persona
		Line Item Display Order	• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
		Geography Mapping	NA	• PACS BI BU - Regional Manager • PACS BI BU - Branch Manager • PACS BI BU - Product Manager • PACS BI BU - Application Analyst • PACS BI BU - Data Steward
		Metric Generator	• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
	Data Management Tools	Balance Reconciliation	• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward
		Data Verification	• PACS BI TD - Application Analyst • PACS BI TD - Data Steward	• PACS BI BU - Application Analyst • PACS BI BU - Data Steward

4

Dimension Management

Dimension Management facilitates you to categorize data into a single object as a Member; define levels and aggregate data to form the Hierarchies, and distinguish each member by defining the required Attributes.

The roles mapped to Dimension Management are as follows:

- Dimension Advanced
- Dimension Authorization
- Dimension Read Only
- Dimension Write

Object Security

Object Security helps to secure data and also to decide what each user can access. You can apply Object Security to various object definitions like Hierarchy definitions, Filters, Expressions and Migration definitions.

You can assign specific user roles and functions to user groups, to implement Object Security. To assign user roles and functions, Seeded User Groups and Seeded User Roles are mapped to the User Groups. If you are using the Seeded User Groups, the security to access objects depends on the associated User Groups.

Map your User Group to the folder in case of public or shared folder, for creating/editing/copying/removing an object in Dimension Management module. You should also be the owner of the folder in case of Private Folder. Additionally, the WRITE role should be mapped to your User Group.

To access the link and the Summary page, map your User Group to ACCESS role. You can view all objects created in Public Folders - Shared Folders to which you are mapped and Private Folders for which you are the owner.

Components of Dimension Management

You can create and manage the following Object Definitions using from Dimension Management:

- [Members](#)
- [Attributes](#)
- [Hierarchy](#)

Attributes

Attributes refers to the distinguished properties or qualifiers that describes a Dimension Member. Attributes are applicable to key dimensions only.

Attribute Summary Page

The list of created attribute definitions are displayed in the Attribute Summary.

To view the **Attribute Summary** page, the **OFS_SRV_API** or **DIM_SUMM** role should be mapped to your User Group.

To access the attribute summary page :

1. From the left menu, click **Reference Data**.
2. Select **Dimension Management** and select **Attribute**, to access the **The Attribute Summary Page**.

The Attribute Summary Page provides the list of attribute Definitions with the following details:

- **Code** - The Numeric Code assigned to the Attribute Definition.
- **Name** - The unique Attribute Definition Name.
- **Data Type** - The Data Type associated with the attribute. The Data Type is set to Date, Dimension, Number or String.
- **Required** - Select **Yes** or **No** to make this attribute a mandatory value for the associated dimension.
- **Seeded** - Select **Yes**, if the attribute is seeded by the service or **No** if the attribute is created by the user.
- **Action** - Click to view, edit, copy or delete an attribute definition. You can also access the list of objects dependent on this definition.

To filter the summary based on specific search criteria, select and add the required search criteria to the **Search** field and enter/select the specific values.

Note

Dimension is a default and mandatory search filter. Select the dimension to access the member definitions available in that dimension. By default the first dimension from the **Dimensions** list is added as the search entry.

Navigating Attribute Summary Page

To access records in a Summary page, you can search, sort and navigate to multiple pages.

Creating Attribute Definition

To create a new Attribute for a dimension, complete the following steps:

1. Click the **Add** in the Attribute Summary Page.
The **Add Attribute Definition** Page is displayed.
2. Enter the following **Attribute Details** :
 - **Dimension** - Select the Dimension for which the new Attribute is getting created.
 - **Numeric Code** - The Numeric Code to be assigned to the new Attribute Definition.

You can enter any number between 0 and 999,999,999, or click **Generate Code**, to auto-generate a unique code. If you enter the value manually, the system will verify if the value is unique and assigns it.

- **Name** - The unique Attribute Definition Name. You can enter up to 100 characters. All characters are allowed except " & ' and " ' ".
- **Alphanumeric Field Value** - The name of physical column name that will be used to store attribute value in the Report Dimension Table. You can enter up to 100 characters. We recommend using only Underscore (" _ ") as a special character.
- **Description** - A brief description about the Attribute Definition. You can enter up to 1000 characters. All characters are allowed except " & ' + @ and ~.

3. Enter the following **Attribute Properties** :

- **Data Type** - Set the Data Type as Date, Dimension, Number, or String from the drop-down list.

Note

If the data type is **Number**, enter a Scale value ≥ 0 . If it equal to 0, only Integers are enabled. To enable decimal entries, the maximum Scale Value must be > 0 and $\leq$ the scale defined for NUMBER in the dimension's underlying attribute table. The maximum value of the NUMBER is set to 22.

- **Dimension** - (Enabled only for Dimension data type.) Select the Dimension to be associated with the new Attribute Definition.
- **Default Value** - The default value is set based on the selected data type. The Maximum characters allowed in Default Value field for String Data Type is 1000. The default value is mandatory if this attribute is set as a required attribute.

Table 4-1 Data Type and Default Values

Data Type	Default Value
Dimension	Select the Default Value from the drop-down list of members mapped to the selected Dimension
Number	Enter a Numeric Value based on the define Scale.
Date	Set a valid date.
String	Enter the Alphanumeric Value

- **Required Attribute** - Select **Yes**, if this attribute is mandatory for the associated dimension members. To set it as an optional attribute, select **No**.
- **Seeded Value** - Select **Yes**, only when the attribute is seeded out of box by the Cloud Service. For a new attribute, select **No**.

4. After entering the required information, click **Save**, to create a new attribute.

Managing Attribute Definitions

You can view, edit, copy and delete the existing Attribute Definitions from the Summary Page.

In the Attribute Summary Page, highlight a specific Attribute Definition and click the **Action**. The following Options are displayed.

- **View**- View the **Attribute Details** for a specific attribute definition.

- **Edit**- Edit the **Attribute Details** for a specific attribute definition.
- **Copy**- Copy the definition details and create another attribute Definition by changing the Alphanumeric Code, Numeric Code and Name.
- **Delete**- Delete the Attribute definition.
- **Check Dependency** - View the list of objects dependent on this definition.

Field	Description
View	View the details for a selected Attribute.
Edit	Edit the selected Attribute.
Copy	Copy the Attribute Definition Details and create another Attribute Definition by changing the unique values like Alphanumeric Field Value, Numeric Code and Name.
Delete	Delete the selected Attribute.

Viewing Attribute Definition

You can view individual Attribute Definition Details at any given point. The Read Only role should be mapped to your User Group.

To view the existing Attribute Definition details in the Attribute page:

1. Highlight the Attribute Definition and click **Action**.
2. Click **View**.

The **Attribute Definition** Page is displayed with the details Code, Name, Data Type, Required and Seeded status.

Modifying Attribute Definition

Modify the Name, Description, or Default Value fields of an Attribute Definition. The Write role should be mapped to your User Group.

To modify an existing Attribute Definition in the Attributes summary:

1. Highlight the Attribute Definition and click **Action**.
2. Click **Edit**, to access the Attribute Definition page.

Edit the required information and click **Save**.

You can view the updates in the Attributes summary.

Copying Attribute Definition

The Copy Attribute Definition facilitates you to quickly create a new Attribute Definition based on the existing attributes or by updating the values of the required attributes.

To copy an existing Attribute Definition, the Write role should be mapped to your User Group.

Refer to the following steps, to copy an Attribute Definition.

1. Highlight the Attribute Definition and click **Action**.
2. Click **Copy**.

The Attribute Definition page is displayed with the details: Code, Name, Data Type, Required and Seeded status.

Edit the unique information such as Name, Alphanumeric Field Value, Numeric Code and click **Save**.

Deleting Attribute Definition

You can remove the Attribute Definitions which are not required in the system by deleting from the Attributes Summary.

To delete an attribute definition, the Write role should be mapped to your User Group.

1. Highlight the Attribute Definition and click the **Menu** button.
2. Click the **Delete** button.

The Attribute Definition is deleted after confirmation.

Note

You cannot delete a definition if any dependency like Attribute, Hierarchy or Filter is attached to it. Detach the dependency before deleting the definition.

Dimensions and Associated Attributes

Dimensions and the associated attributes.

The following tables lists the seeded attributes with the details, associated with each dimension.

Table 4-2 Dimensions and Associated Seeded Attributes

Attribute Name	Data Type	Mandatory
Dimension - Common Chart of Accounts		
Account Type	Dimension	Yes
Accrual Basis	Dimension	No
Rollup Signage	Dimension	Yes
Dimension - Financial Element		
Weighting Financial Element	Dimension	No
Account Type	Dimension	Yes
Column Property	Dimension	Yes
Rollup Signage	Dimension	Yes
Dimension - General Ledger Account		
Accrual Basis	Dimension	No
Common Chart of Accounts	Dimension	Yes
Rollup Signage	Dimension	Yes
Account Type	Dimension	Yes
Reconciliation Product	Dimension	Yes
Dimension - Legal Entity		
Rate Data Source	Dimension	Yes
Group Company Party	String	Yes
Dimension - Organizational Unit		
Offset Organizational Unit	Dimension	No

Table 4-2 (Cont.) Dimensions and Associated Seeded Attributes

Attribute Name	Data Type	Mandatory
Dimension - Product		
Accrual Basis	Dimension	No
Common Chart of Accounts	Dimension	Yes
Rollup Signage	Dimension	Yes
Account Type	Dimension	Yes
Amenability Rate	Dimension	Yes
Interest Rate Sensitivity	Dimension	Yes
Product Time Value	Number	Yes

Members

Dimension Members refer to the individual items that constitute a dimension when data is categorized into a single object such as Product, Organization, Time, and so on. Members are available within Dimension Management section.

Member Summary Page

The list of created member definitions are displayed in the Member Summary.

To view the **Member Summary** page, the **OFS_SRV_API** or **DIM_SUMM** role should be mapped to your User Group.

To access the member summary page:

1. From the left menu, click **Reference Data**.
2. Select **Dimension Management** and select **Members**.

The **Member Summary page** containing the following details is displayed.

- **Alphanumeric Code**- The alphanumeric code assigned to a member.
- **Numeric Code**- The numeric code assigned to a member.
- **Name**- The unique member name.
- **Is Leaf**- The leaf node status of the member definition.
 - **Yes**- The member is set as a leaf node in any hierarchy and Child cannot be added to this node.
 - **No**- The member is a not a leaf and can have child nodes.
- **Enabled** - The status of the member definition (Yes/No).
- **Action**- Click to view, edit, copy or delete a member definition. You can also access the list of objects dependent on this definition.

To filter the summary based on specific search criteria, select and add the required search criteria to the **Search** field and enter/select the specific values. Use **More Filters** to add additional search criteria.

Note

Dimension is a default and mandatory search filter. Select the dimension to access the member definitions available in that dimension. By default the first dimension from the **Dimensions** list is added as the search entry.

Creating Member Definitions

You can add new Member Definitions from the Member Summary page.

To create a member definition :

1. To create a member definition, click the **Add** in the **Member Summary** page, to access the **Member Details** page.
2. Enter the following **Member Details** :
 - **Dimension**- Select the dimension to be associated with the new Member.
 - **Numeric Code**- The numeric code to be assigned to the new member definition. You can enter the value between 0 and 999,999,999 manually or click **Generate Code**, to auto-generate a unique code.
If you enter the value manually, it is assigned after validation.
 - **Alphanumeric Field Value**- The alphanumeric Code to be assigned to the new Member Definition.
You can enter up to 100 characters and enter only Underscore (" _ ") as a special character.
 - **Name**- The unique member definition name.
You can enter up to 100 characters. All characters are allowed except " & ' and " ' ' ".
 - **Description**- A brief description about the member definition.
You can enter up to 1000 characters. All characters are allowed except " & ' and " ' ' ".
 - **Is Leaf**- Check this option if the member is a leaf of another member. By default, it is set to **Yes**.
 - **Yes**- The member can be used as a leaf node in any hierarchy and child cannot be added to this node.
 - **No**-The member is not set as a leaf and can have child nodes.

Note

If a member is set as a non-leaf and is associated with child nodes, it cannot be set as a leaf again.

- **Enabled**- This field is set to **Yes** by default. You can modify the **Enabled** status, after creating the member. To edit a member, refer [Editing Member Definition Details](#).

Note

You can change the option to **No** only when the particular member is not used in any hierarchy. The disabled members will not be displayed in Hierarchy Rules, or utilities which are based on Hierarchies, such as Hierarchy Filters and Hierarchical Assumption Browsers used in applications.

3. (Optional). Click **Copy**, to attach an existing attribute to this new member definition.
You can also set the attribute values for a new member definition, manually. Enter/select the attribute values in the **Member Attributes** pane. All the [attributes associated with the selected dimension](#) are displayed in the Member Attributes pane.
4. Locate the Attribute to be copied and click **Move** and select **Copy**, located under **Actions**.
5. Click **Save**, to create the new Member definition and view it the Member Summary.
Click **Actions** and select **Edit Member Details** to edit the member details or select **Save and Add New**, to create the new member definition and proceed with adding another definition.

Managing Member Definitions

You can View, Edit, Copy, and Delete the existing Member Definitions from the Member Summary page.

In the members summary page, highlight a specific Member Definition and click the **Action**. The following Options are displayed:

- **View**- View the **Member Details** for a specific Member Definition.
- **Edit**- Edit the **Member Details** for a specific Member Definition.
- **Copy**- Copy the Member Definition Details and create another Member Definition by changing Alphanumeric Code, Numeric Code and Name.
- **Delete**- Delete the member definition.
- **Check Dependency** - View the list of objects dependent on this definition.

Viewing Member Definition Details

You can view the details of an individual Member Definition, from Member Summary page.

To view a Member Definition, the Read Only Role should be mapped to your User Group.

You can view the details of an individual Member Definition, using the following procedure:

1. Highlight the Member Definition and click the **Action**.
2. Click the **View** button.

The Member Definition page is displayed with the details Dimension, Alphanumeric Code, Numeric Code, Name, Is Leaf and Enabled status.

Editing Member Definition Details

To edit the existing Member Definition details, the Write role should be mapped to your User Group.

You can edit individual Member Definition Details, using the following procedure:

1. Highlight the Member Definition and click the **Action**.
2. Click the **Edit** button.

The Member Definition page is displayed with the details Dimension, Alphanumeric Code, Numeric Code, Name, Is Leaf and Enabled status.

Edit the required information and click **Save**.

Copying Member Definition Details

To copy the Member Definition Details, the Write role should be mapped to your User Group.

You can copy individual Member Definition Details, to recreate another new Member Definition, using the following procedure:

1. Highlight the Member Definition and click the **Action**.
2. Click the **Copy** button.

The **Member Definition Page** is displayed with the details Dimension, Alphanumeric Code, Numeric Code, Name, Is Leaf and Enabled status.

Edit the unique information such as Name, Alphanumeric Code, Numeric Code and click **Save**.

Deleting Member Definition Details

To delete a Member Definition, the Write role should be mapped to your User Group.

You can delete individual Member Definition Details, using the following procedure:

1. Highlight the Member Definition and click the **Action**.
2. Click the **Delete** button.

The Member Definition is deleted after confirmation.

Hierarchy

Hierarchies refer to Dimension Members that are arranged in levels, with each level representing the aggregated total of the data from the level below. One dimension type can have multiple hierarchies associated with it. Hierarchies are available within the Dimension Management section.

A Default Hierarchy definition is required to support BI Users to perform multidimensional analysis, in the BI reporting. The hierarchy name of a default hierarchy definitions are suffixed with the term **System Hierarchy**. You can only view the details of the default hierarchy, from the Hierarchy Summary page. All orphan members under their corresponding default hierarchy, are automatically updated, when they are added/deleted to/from the system.

Hierarchy Summary Page

The list of existing hierarchy definitions is displayed in the Hierarchy Summary page.

To view the **Hierarchy Summary** page, the **OFS_SRV_API** or **DIM_SUMM** role should be mapped to your User Group.

To access the hierarchies summary page:

1. From the left menu, click **Reference Data**.
2. Click **Dimension Management** and select **Hierarchies**, to access the Hierarchies Summary page containing a list of existing hierarchies with the following details:
 - **Name** - The unique Hierarchy Name.

 Note

The name of a default hierarchy is always suffixed with the term **System Hierarchy**.

- **Folder** - Folder in which the hierarchy is stored.
- **Dimension** - Dimension associated with the hierarchy.
- **Tags** - Labels to simplify the data search and locate the required details.
- **Action** - Click to view, edit, copy or delete a hierarchy definition. You can also access the list of objects dependent on this definition.

Navigating Hierarchy Summary Page

To access records in a Summary page, you can search, sort and navigate to multiple pages.

Creating Hierarchy Definitions

To create a Hierarchy Definition in the Hierarchy Summary page, complete the following steps:

1. Click **Add** in the **Hierarchy Summary** page. The **Hierarchy Details** page is displayed.
2. Enter the **Hierarchy Details** as described in the following table:

Table 4-3 Field Description

Field	Description
Name	The unique Hierarchy Definition Name.  Note You can enter up to 100 characters. All characters are allowed except " & ' and " ' ' ' .
Description	A brief description about the Hierarchy Definition.  Note You can enter up to 1000 characters. All characters are allowed except " & ' + @ and ~.
Folder	Select the Folder in which the Hierarchy is to be stored.
Dimensions	Select the Dimension to be associated with the new Hierarchy Definition.
Click Apply .	

Table 4-3 (Cont.) Field Description

Field	Description
Hierarchy View	The Members associated with the selected Dimension are displayed. You can sort this list in Ascending/Descending order, expand or collapse the list to view in details and search for a specific Member. You can focus on a Member to view the Member Properties. You can add a Child or add a Sibling to an existing Member in the data grid.
Search View	The search results based on the specific keyword entered to search a Member is populated.

Table 4-4 Viewing interactive options for a Member

Icon	Description
Mouse-over a Member to see the following options. Select the required option to take action such as adding a child, deleting a node, paste as child, paste as sibling	

Figure 4-1 Add child, sibling, and leaf Add a child, sibling and/or leaf.



Figure 4-2 Create and add Create and a child, sibling and/or leaf to the Member.



Figure 4-3 Delete/undo delete Delete a node or undo deletion.



Figure 4-4 Cut and paste child/siblings Move child/siblings up or down as required.



To Add a Child to the Hierarchy:

- a. In the **Hierarchy View** tab, mouse-over the hierarchy to which you want to add a child and click the **Add child, sibling and leaf** icon.
 - b. Select **Add Child** option. The **Add Members** page is displayed.
 - c. Select the required Member and click **Move Right**, to move the Member to the Selected Members panel. To select multiple members, press CTRL and select the members.
The selected members are added to the **Selected Members** pane.
 - Click **Move All Right** to move all members listed in the Available Members pane, to the Selected Members pane. Click **Fetch from DB** to select all nodes/ members in the server.
 - Select a member and click **Move Left** to deselect a Member. To remove multiple members, press CTRL and select the members.
 - To remove all the members from the **Selected Members** pane, click **Move All Left**.
 - You can click **Search** button for the required member using Alphanumeric Code, Numeric Code, Name, Description, Attribute Name, or Attribute Value. Enter the search criteria and Click **Search**, in the Search Panel.
 - You can also click **Search** button to toggle the display of Numeric Code left, right, or name and click button to display Alphanumeric Code left, right, or name.
 - d. Click **Add**. The selected member is displayed as child under data grid panel in the **Hierarchy View** tab.
3. **To add a Sibling to the Child in the Hierarchy Definition:**
- a. Mouse-over the child to which you want to add a sibling and click the **Add child, sibling and leaf** icon.).
 - b. Select the option **Add Sibling**.
The **Add Sibling** Page is displayed.
 - c. Select the required Members and **Move Right**, to move the Member to the Selected Members panel.
The Member is displayed in the **Selected Members** panel.
 - d. Click **Add**. The selected Member is added as **Sibling** below the **Parent** under data grid Panel in the **Hierarchy View** tab.
4. **To add a Leaf under a Parent/Child or Sibling:**
- a. Mouse-over the Parent or Child and click the **Add child, sibling and leaf** icon.
 - b. Select **Add Leaf**.
The Add Member Page is displayed.
 - c. Select the required Members and click **Move Right**, to move the Member to the Selected Members panel.
The Member is displayed in the **Selected Members** panel.
 - d. Click **Add**. The selected Member is displayed as Leaf below the Parent or Sibling under **Show Hierarchy** Panel in the **Hierarchy View** tab.
5. **To cut and paste Child or Sibling:**
- a. Right-click on any node and select **Cut**.
 - b. Right-click on any node and **Paste as Child** or **Paste as Sibling**.
6. **To Delete/Undelete**
- a. Right-click on the node to be deleted and select **Delete Node**.

The node deleted is struck out.

- b. Right-click and select **UnDelete** to cancel deletion of the node.
7. To view the Member Properties and Member Attributes of a node in the **Hierarchy View** Panel:
 - a. Click on a Member.

The properties such as Alphanumeric Code, Numeric Code, Name, Description, Enabled, Is Leaf, Created By, Creation Date, Last Modified By, Last Modification Date, Attribute, and Value of the selected Member are displayed in the Member Properties and Member Attributes Grids.

In the Hierarchies page you can also:

 - Click **Collapse** or Expand, to collapse or expand a branch .
 - Click **Focus** or **Unfocus**, to focus or unfocus a selected node except the Root Node.
 - Click **Sort** to sort the list in ascending or descending order.
8. Click **Save**.

The new Hierarchy Definition is created successfully.

Audit Info

The Audit Info section provides details such as Created By and Modified By Users, Creation and Modification Date, and Authorized By user Details. You can add additional information as comments and tags. Tags are labels that help to simplify the data search and locate the required details.

Managing Hierarchy Definitions

You can View, Edit, Copy, and Delete the existing Hierarchy Definitions from the Hierarchy Summary page.

In the Hierarchy Summary page, highlight a specific Hierarchy Definition and click **Action**. The following options are displayed:

- **View** - View the hierarchy details for a specific definition.
- **Edit** - Edit the hierarchy details for a specific definition.
- **Copy** - Copy the hierarchy details and create another definition by changing the unique values like name, description and so on.
- **Delete** - Delete the hierarchy definition.
- **Check Dependency** - View the list of objects dependent on this definition.

Viewing Hierarchy Definition Details

You can view the details of an individual Hierarchy Definition, using the following procedure:

1. Highlight the Hierarchy Definition and click **Action (three dots)**.
2. Click **View**.

The Hierarchy Definition page is displayed with the details Name, Description, Folder, Dimension, Start Date and Hierarchy View details.

Editing Hierarchy Definition Details

You can edit individual Hierarchy Definition Details at any given point.

To edit the existing Hierarchy Definition Details:

1. Highlight the Hierarchy Definition and click the **Action (three dots)**.
2. Click **Edit**.

The Hierarchy Definition Page is displayed with the details Name, Description, Folder, Dimension, Start Date and Hierarchy View details.

Edit the required information and click **Save**.

Copying Hierarchy Definition Details

You can copy individual Hierarchy Definition Details, to recreate another new Member Definition. To copy the Member Definition Details:

1. Highlight the Hierarchy Definition and click **Action**.
2. Click **Copy**.

The Hierarchy Definition page is displayed with the details Name, Description, Folder, Dimension, Start Date and Hierarchy View details.

Edit the unique information such as Name, Description, Folder, Dimension, Start Date and Hierarchy View details and click **Save**.

Deleting Hierarchy Definition Details

To delete a Hierarchy Definition:

1. Highlight the Hierarchy Definition and click **Action**.
2. Click **Delete**.

The Hierarchy Definition is deleted after confirmation.

Note

You cannot delete a definition if any dependency like Attribute, Hierarchy or Filter is attached to it. Detach the dependency before deleting the definition.

Viewing Data in a Summary Page

A Summary page will contain a list of definitions associated with a specific Dimension Data, Filters, Batch or Schedules.

You can search, filter and customize the view to access the required data faster.

Searching Summary

Search for a specific Definition based on the following criteria. Select/Enter one or more unique values/tag or Leaf and Enabled status associated with the definition and click **Search**.

Sorting a Summary Page

Sort the list of definitions, to view a specific definition, in a definition Summary .

To sort the various Definitions list:

- **Sort By:** Group the based on the following fields:
 - **Member Summary** - Dimension, Name, Alphanumeric Code, Numeric Code, Enabled and Is Leaf Status, Attribute Name (if the selected Dimension has Dimension Type Attribute) and Attribute Value.
 - **Attribute Summary** - Branch, Name, Code and Data Type.
 - **Hierarchy Summary** - Dimension, Name, Tag and Folders.
 - **Filter Summary** - Name, Folder and Filter Type.
- **Sort Order:** Sort the Complete list in Ascending/Descending order.

Setting Number of Records per Page

Customize the number of records per page, to access the required record easily.

At the bottom of the page, you can enter the number of entries that are available on a single page in the **Records** box. By default, this value is set to 8. You can increase or decrease the number of entries that are displayed using the up and down arrows.

To access a particular page, enter that page number in the Page Box located at the bottom of the page.

To navigate between pages:

- Use **First page** to view the entries in the first page.
- Use the **Previous page**, to view the entries in the previous page.
- Use the **Next page**,to view the entries in the next page.
- Use the **Last page**, to view the entries in the last page.

5

Data Management Tools

This chapter introduces the Balance Reconciliation and Data Verification topics.

Data Management Topics:

- [Data Maintenance Interface](#): Data Maintenance Interface (DMI) helps to design a Data Form in a user-specified format. Further, it allows to perform maintenance activities using the Designed Form.
- [Balance Reconciliation](#): Balance Reconciliation module helps you to Reconcile the selected processing/instrument/account balances against the Management Ledger. If any differences are found, you will have the flexibility to choose significant differences and create plug entries for those in the Ledger_Instruments table.
- [Data Housekeeping](#): The Data Housekeeping UI helps you to delete data, drop partitions and truncate sub-partitions, and archive the data from selected tables.
- [Data Level Security](#): This topic describes how the data administrators can restrict access to the users to instrument and management ledger tables based on specific dimensions.
- [Redaction Framework](#): Oracle Data Redaction provides selective, on-the-fly redaction of sensitive data in database query results prior to display by applications.

Data Maintenance Interface

Data Maintenance Interface (DMI) helps to design a Data Form in a user-specified format. Further, it allows to perform maintenance activities using the Designed Form.

Form Builder

Form Builder allows the user to build a form to maintain the underlying data.

Data Entry

This allows the user to maintain the data either through the form that has been defined or do a bulk upload using the excel upload mechanism. A strong data governance process is enabled through an approval workflow of the data maintained.

Guidelines for Data Entry and Excel Upload Forms

When creating Data Entry or Excel Upload forms, ensure that all required columns are included in the form definition. This includes:

- Columns defined as NOT NULL
- Primary key columns
- Columns used for partitioning and sub-partitioning

Note

Missing mandatory columns might result in data load failures or processing errors.

Staging tables are those prefixed with STG. When creating forms for staging tables, ensure all mandatory columns — including partition, sub-partition, and other required columns — are included in the form definition.

Table 5-1 Mandatory Columns for Staging Tables

Column Name	Description	Example
INPUT_FILE_NAME	Specifies the name of the source file associated with the data load.	stg_asset.csv
DATA_FILE_SPEC_ID	Identifies the Data File Specification corresponding to the input file	
LOAD_IDENTIFIER	A unique identifier for the data load. This can be any numeric value	12345

Note

- Staging tables (STG_*) are internally partitioned and sub-partitioned.
- Sub-partitioning is based on the *INPUT_FILE_NAME* column.
- If *INPUT_FILE_NAME* is not included in the form or is left NULL, the system cannot map the record to a valid partition.

Processing tables generally refer to tables such as *FSI_D_ (for example, FSI_D_LOAN_CONTRACTS, FSI_D_ASSET)**.

These tables are internally partitioned and sub-partitioned as follows:

- Partitioning is based on AS_OF_DATE
- Sub-partitioning is based on instrument or domain-specific identifiers (for example, INSTRUMENT_TYPE_CD or similar columns)

When creating forms for processing tables:

- Ensure all NOT NULL columns are included (for example, identifiers such as account ID, instrument ID, or similar keys)
- Include all partition and sub-partition columns

Table 5-2 Mandatory Columns for Staging Tables

Column Name	Description	Example
AS_OF_DATE	Specifies the business date for the record. Used as the primary range partition key.	01-JAN-2024
INSTRUMENT_TYPE_CD	Identifies the instrument type associated with the record. Used as the sub-partition key.	BOND
ID_NUMBER	A unique numeric identifier for the record. All NOT NULL columns of this type must be included.	98765

Table 5-2 (Cont.) Mandatory Columns for Staging Tables

Column Name	Description	Example
IDENTITY_CODE	A code identifying the entity or instrument. All NOT NULL columns of this type must be included.	CORP_001

Note

- Processing tables (FSI_D_*) are internally partitioned by AS_OF_DATE (RANGE partition) and sub-partitioned by INSTRUMENT_TYPE_CD (LIST sub-partition).
- All NOT NULL columns (for example, ID_NUMBER, IDENTITY_CODE) must be included in the form definition.
- If any partition or sub-partition column is not included in the form or is left NULL, the system cannot map the record to a valid partition.

If mandatory partition-related columns are not populated, the following error may occur during data entry or Excel upload:

ORA-14400: inserted partition key does not map to any partition

In such cases:


- Records may initially appear as **Created** in the Audit Trail.
- They are subsequently marked as **Rejected** due to partition mapping failure.

Note

For a complete list of all partitioned tables, their partition columns, sub-partition columns, and valid LOV values, see the Partition Reference file hosted on MOS (*Doc ID: 2869409.1*).

Process of DMI Windows

The DMI Process starts with a user creating forms in the Form Builder. After the creation of forms, a user with Authorization Privileges authorizes the forms. The Authorized Forms are then used by users to enter data into the database.

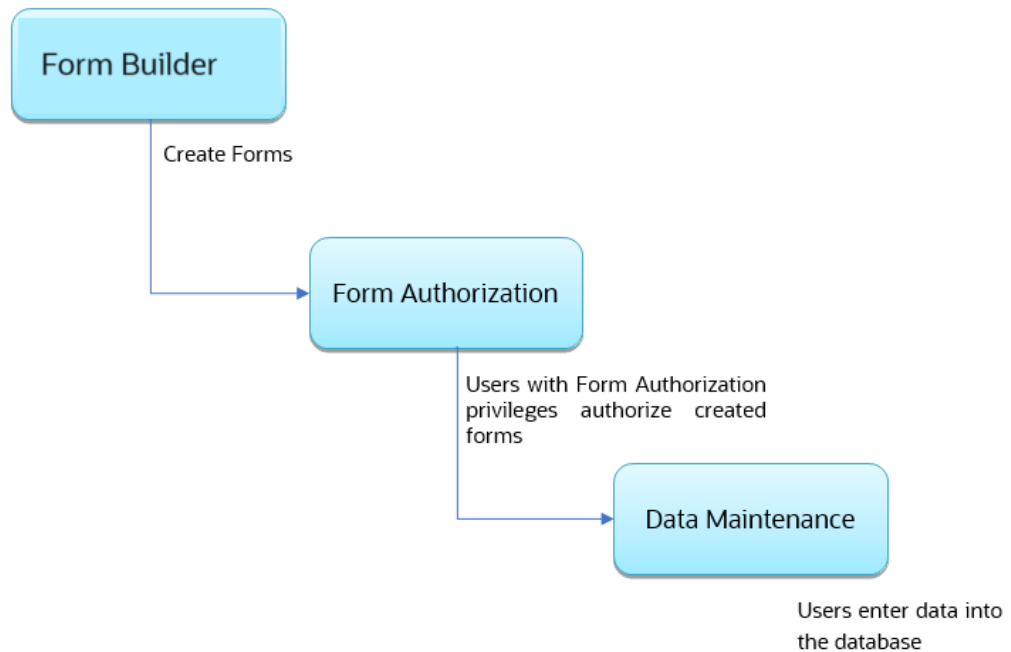Figure 5-1 DMI Process Flowchart

User Role Mapping and Access Rights

User access to the DMI UI and the ability to perform functions in it is dependent on the mapping of the user profile to the roles and the access rights assigned.

To access the DMI features and edit forms, you must be mapped to the following roles:

Table 5-3 User Role Mapping for Data Maintenance Interface

Role Code	Role Name	Functionality
DMIDSGNREAD	Data Designer Read	Assign this role to the user to access the Configure View menu from Navigation Tree. NOTE: The mapping of this role does not allow view, edit, and add actions.
DMIDSGNAUTH	Data Designer Auth	Assign this role to the user to Authorize, Excel Upload, and Designer Summary.
DMIDSGNREJ	Data Designer Reject	Assign this role to the user to Reject, Excel Upload, and Designer Summary.
DMIDGNFORM	Data Designer Form	Assign this role to the user to Create Designer Form Definition.
DMIDGNTEMPLATE	Data Designer Template	Assign this role to the user to Create Excel upload Definition.

Table 5-3 (Cont.) User Role Mapping for Data Maintenance Interface

Role Code	Role Name	Functionality
DMIDSGNDEL	Data Designer Delete	Assign this role to the user to Delete, Excel upload, and Designer Summary.
DMIDGNVIEW	Data Designer View	Assign this role to the user to Create View Definition.
DMIDSGNWRITE	Data Designer Write	Assign this role to the user to Add, Edit and Copy all kinds of definitions in Designer screen.
DMIDATAREAD	Data Entry Read	Assign this role to the user to access the Data View menu from the Navigation Tree. NOTE: The mapping of this role does not allow view, edit, and add actions.
DMIDATAALL	Data All Summary	Assign this role to view the list of all Component Records in Data Entry Screen.
DMIDATAWRTE	Data Entry Write	Assign this role to the user to Add, Edit Records in Data Entry Screen.
DMIDATADEL	Data Entry Delete	Assign this role to the user to Delete a Record Summary Data Entry Screen
DMIDATAAUTH	Data Entry Auth	Assign this role to Authorize a Record Summary in Data Entry Screen.
DMIDATAREJ	Data Entry Reject	Assign this role to Reject a Record Summary in Data Entry Screen.
DMIDGNAUTO	Enable Auto Approve	The user mapped to this function will have access to create Auto Approved Forms
DMIDGNAMND	Enable editing of approved forms	User with this role can edit/ amend approved forms.

Note

All the DMI roles are mapped to a single group, Data Maintenance admin group. If a user is mapped to this group all the DMI roles are automatically assigned to the user.

Access the Data Maintenance Interface

To access the Data Maintenance Interface (DMI):

1. Login to your Oracle Cloud account, with the required credentials to access DMI.
2. Select an application, to access the DMI for that application.

Note

The navigation steps vary for different applications. Refer to the respective application documentation for accessing Data Maintenance Interface.

User Role Mapping and Access Rights

User access to the DMI UI and the ability to perform functions in it is dependent on the mapping of the user profile to the roles and the access rights assigned.

To access the DMI features and edit forms, you must be mapped to the following roles:

Table 5-4 User Role Mapping for Data Maintenance Interface

Role Code	Role Name	Functionality
DMIDSGNREAD	Data Designer Read	Assign this role to the user to access the Configure View menu from Navigation Tree. NOTE: The mapping of this role does not allow view, edit, and add actions.
DMIDSGNAUTH	Data Designer Auth	Assign this role to the user to Authorize, Excel Upload, and Designer Summary.
DMIDSGNREJ	Data Designer Reject	Assign this role to the user to Reject, Excel Upload, and Designer Summary.
DMIDGNFORM	Data Designer Form	Assign this role to the user to Create Designer Form Definition.
DMIDGNTEMPLATE	Data Designer Template	Assign this role to the user to Create Excel upload Definition.
DMIDSGNDEL	Data Designer Delete	Assign this role to the user to Delete, Excel upload, and Designer Summary.
DMIDGNVIEW	Data Designer View	Assign this role to the user to Create View Definition.
DMIDSGNWRITE	Data Designer Write	Assign this role to the user to Add, Edit and Copy all kinds of definitions in Designer screen.
DMIDATAREAD	Data Entry Read	Assign this role to the user to access the Data View menu from the Navigation Tree. NOTE: The mapping of this role does not allow view, edit, and add actions.
DMIDATAALL	Data All Summary	Assign this role to view the list of all Component Records in Data Entry Screen.
DMIDATAWRTE	Data Entry Write	Assign this role to the user to Add, Edit Records in Data Entry Screen.
DMIDATADEL	Data Entry Delete	Assign this role to the user to Delete a Record Summary Data Entry Screen

Table 5-4 (Cont.) User Role Mapping for Data Maintenance Interface

Role Code	Role Name	Functionality
DMIDATAAUTH	Data Entry Auth	Assign this role to Authorize a Record Summary in Data Entry Screen.
DMIDATAREJ	Data Entry Reject	Assign this role to Reject a Record Summary in Data Entry Screen.
DMIDGNAUTO	Enable Auto Approve	The user mapped to this function will have access to create Auto Approved Forms
DMIDGNAMND	Enable editing of approved forms	User with this role can edit/ amend approved forms.
DATASECURITY	Data Security	Assign this role to the user to view unredacted data in the Personal Information (PI) columns (if the Redaction toggle is turned on in the Data Exporter UI). If this toggle is turned off, data appears redacted for all users regardless of their role. For information on how full and partial redaction are performed, see Redaction Functions in Data Security Management Guide.

Note

All the DMI roles are mapped to a single group, Data Maintenance admin group. If a user is mapped to this group all the DMI roles are automatically assigned to the user.

Form Builder

Access the list of Form definitions already created in the environment.

The Form Definitions Summary lists all the existing Form Definitions in the application.

You can create forms from the Form Designer View. The forms in the application are created with details configured for data maintenance and require authorization for use after creation. You can also edit, view, and delete forms, from the Forms Definitions Summary, based on the assigned roles and privileges. For more information, refer [User Role Mapping and Access Rights](#).

To view the Form Definitions Summary:

1. Click **Data Maintenance Interface**.
2. Click **Form Builder** in the DMI navigation list to access the **Form Definitions Summary**.

The following details are included the Summary page.

- **Name** - The unique name of the Form Definition
- **Description** - The Form Definition description.

- **Type** - The form definition type:
 - **Excel Upload** – creates form based on uploaded Excel Sheet.

Note

Microsoft Office 2016 Standard version as well as Office 365 version are supported.

- **Data Exporter** – creates form based on an entity table.
- **Data Entry** – creates the form based on the entities, attributes and rulesets provided by the user.
- **Status** - The processing status of the form definition. The various processing statuses are:
 - **Draft** – when the form is under development and is yet to be submitted for approval.
 - **Pending Approval** – When the approval is pending.
 - **Approved** – When the form definition is approved.
- **Created By** - The Username of the logged in User who created the form.
- **Actions** - View, copy or edit or amend a form definition.
- **Info** - The form definition details including:
 - Created Date
 - Last Modified By
 - Authorizer
 - Authorizer comments

Use **Search** to quickly access the required forms or check the Forms tile to view a list of existing forms. To search for a specific Form Definition, input search terms in the **Form Name** or **Description** field, or use a combination of both, and click **Search**. Click **Cancel** to clear the search criteria and view all form records.

Sort the Form Definition based on **Name**, **Description**, and **Created By** fields. You can also sort the page in ascending/descending order.

To filter and view Form definitions with a specific processing status, click the respective status name at the top of the page.

Creating New Forms in Form Builder

Form creation involves selecting entities, displaying columns with attributes on the form, and if required, selecting authorization of data. Security settings provide for the creation of specific-user access for the forms and authorization.

To add a form :

1. In the **DMI Summary** page, click **Add**, to access the **Designer - Configure** page.
2. Select the form definition type as follows:
 - **Excel Upload** – creates form based on uploaded Excel sheet.
 - **Data Exporter** – creates form based on an entity table.

- **Data Entry** – creates the form based on the entities, attributes and rulesets provided by the user.

For more information about creating various form definitions:

- [Creating Forms Using Excel Upload](#)
- [Creating forms using Data Exporter](#)
- [Creating Forms Using Data Entry](#)

Creating Forms Using Excel Upload

Excel Upload Definition Type creates new forms based on the uploaded Excel file that has column names as per the table in the application data source.

While creating forms using Excel Upload, you can also modify the mapping for the attributes. After the new form is approved from the Forms Definition Summary Page, users with the necessary role and permission can perform Data Entry for the records updated by the Excel file.

Note

Microsoft Office 2016 Standard version as well as Office 365 version are supported.

You can view/modify data in the personal information (PI) columns based on the assigned roles. For more information about the roles, refer to [User Role Mapping and Access Rights](#).

To create forms using Excel Upload:

1. Select Excel Upload in the Create Form Definition page and add the following details.
 - **Code** - The unique Form code. This value is auto-generated.
 - **Name** - The Form Name. You can enter between 3 to 100 characters. Only alphabets, numbers, spaces, and underscores are allowed.
 - **Description** - The Form Definition description. You can enter between 3 to 100 characters. Only alphabets, numbers, spaces, and underscores are allowed
 - **Auto Map Entities** - Enable this option to to auto map the attributes in the Excel file with the attributes in the Entity Table.

At any point of time during the form creation, click **Save** to add the new form to the Form Summary. The form is saved in the **Draft** format. Click **Actions** and select **Edit**, to update the form definition.

2. Click **Continue** to access the **File Upload** tab.
3. In the **File Upload** tab, enter the following details:
 - **Template Name** and **Description** for the excel template.
 - Click **Drag and Drop** and select the excel file to update the required table.

Note

You can also drag and drop the required excel file to the **Drag and Drop** area.

The excel file is uploaded and a confirmation box is displayed, and the **Mapped Entities Tab** is displayed.

4. After entering the **File Upload** information, click **Continue** to access the **Mapped Entities** tab.
5. In the **Mapped Entities** tab, select the **Primary Entity** name of the table that needs to be modified.

Note

Only the tables data which can be edited are displayed in the **Entity** drop-down list.

If the table has Child tables, the Child tables are displayed in the **Mapped Entities** tab. You can select the required child tables for which data should be input during data entry.

6. Select **Enable Bulk Authorization** if you want to enable the bulk authorization of all the records when you edit an approved Form from Data Entry.
7. Enable **Auto Approve** if you want the Forms Definition to be automatically approved from Forms Definition Summary page and is enabled for data entry.

Alternatively, you can also get the form approved manually. For manual approval, disable the auto approve option.

A user with the required role can then perform the data entry without the need for an approval process. For more information, see [User Role Mapping and Access Rights](#).

8. Click **Continue**, to proceed with the **Mapped Attributes** tab.
9. Click the drop-down arrow corresponding to the table in the Entity Name.

The source attributes from the table and the mapped attributes from the Excel file are displayed. If the selected table has Child tables, the Child tables that you select from the Mapped Entities tab are also displayed in the **Mapped Attributes** tab. You can configure the attributes for the master table and its child tables here.

10. Click the required mapping in the **Override Mapping Column** and enter the required attribute name if you want to change the default mapping.
11. To activate data security, Select the check box next to the **Attribute Name**, in the **Mapped Attributes** Column.

12. Click the **Lock** icon adjacent to a specific attribute name, to configure a specific data security condition.

The condition that you configure is applicable when a user performs the data entry for the table records for each approved Forms Definition from the Data Entry Page. For more information, refer [Enabling Data Security for New Form Definitions](#).

13. Click **Continue** to proceed to the **User Security** tab.
14. Select the user or user groups who can perform data entry to maintain the data in the table.

For more information about adding user security, refer to [Enabling User Security for New Form Definitions](#).

15. Click **Data Preview** to preview the form data.
16. Click **Save** if you want to save the forms definition in draft format. The form is added to the **Form Summary** with **Draft** status.

17. Click **Submit** if you want to submit the Forms Definition for manual/auto approval.

For more information refer to [Approving and Rejecting New Form Definitions](#). After approval/auto approval, the form is added to the **Form Definition Summary**.

Creating Forms Using Data Entry Option

Use the Data Entry option to create a Forms Definition and select the table and attributes that you want to modify.

You can enter the values for the table records in the approved Forms Definition from Data Entry, after the new Forms Definition is approved from the Forms Definition Summary Page.

You can view/modify data in the personal information (PI) columns based on the assigned roles. For more information about the roles, refer to [User Role Mapping and Access Rights](#).

To create a forms definition:

1. Select **Data Entry** in Create New Form Definition page and enter the required details.
2. Enter the following details:
 - **Code** - Unique form code. This value is auto-generated.
 - **Name** - The form name. You can enter between 3 to 100 characters. Only alphabets, numbers, spaces, and underscores are allowed.
 - **Description** - The form definition description. You can enter between 3 to 100 characters. Only alphabets, numbers, spaces, and underscores are allowed.
 - **Threshold** - The maximum number edits allowed per row.
3. Click **Continue** to access the **Entities** tab.
4. Select the table that you want to modify in the **Primary Entity** Field.

Note

Only the tables data which can be edited are displayed in the **Entity** drop-down list.

If the selected table have child tables, the child tables is also displayed. You can select the required Child tables for which you wish to input the data during data entry.

Note

You can select up to four child tables only for each master table.

5. Select **Enable Bulk Authorization**, if you want to enable the bulk authorization of records while performing data entry.
6. Enable **Auto Approve** if you want the Forms Definition to be automatically approved from Forms Definition Summary page and is enabled for data entry.

Alternatively, you can also get the form approved manually. For manual approval, disable the auto approve option.

A user with the required role can then perform the data entry without the need for an approval process. For more information, see [User Role Mapping and Access Rights](#).

7. Click **Continue**, to proceed with the **Attributes** tab.

8. Select the **Filter** from the existing filters in the drop-down list or click **Filter** to [apply a new attribute filter](#) to the form definition.
9. Click the drop-down arrow corresponding to the table in the **Entity Name**, to view the attributes in the entity table.

If your table has child tables, the Child tables that you select from the Entities tab also gets displayed in the Attributes tab.
10. Select the attributes for which you want to modify the data from the **Attribute Name**.
11. Select **Participate in Data Security** if you want to configure a specific condition.
12. Click the **Lock** icon adjacent to a specific attribute name, to configure a specific data security condition.

The configured condition is applicable when a user enters data in table for each approved Forms Definition from the Data Entry Page. For more information, refer [Enabling Data Security for New Form Definitions](#).
13. Enter **Select Columns** to search and select specific columns.
14. Click **Continue** to access the **Ruleset** tab.

The list of attributes associated with the parent and the Child tables are displayed in the Ruleset tab.
15. Assign permission to add data during data entry for those attributes that are set to Editable/Read-only mode. You cannot modify the key fields set in read-only mode.
16. Click Continue and proceed to the **User Security** tab.
17. Click **User Security** to select the user or user groups who can perform data entry to maintain the data in the table.

For more information about adding user security, refer to [Enabling User Security for New Form Definitions](#).
18. Click **Submit** if you want to submit the Forms Definition for manual/auto approval.

For more information refer to [Approving and Rejecting New Form Definitions](#). After approval/auto approval, the form is added to the **Form Definition Summary**.

Creating Forms Using Data Exporter

Forms created using Data Exporter are used to export table data to CSV or JSON format.

While creating forms using Data exporter, you can also include filters and dynamic placeholders to view and export specific set of data.

To create forms using Data Exporter:

1. Select **Data Exporter** in Create New Form Definition page.
2. Enter the following details:
 - **Source** - Select the input source as table/view.
 - **Code** - Unique Form Code. This is auto-generated.
 - **Name** - The name of the form in Form Name. You can enter between 3 to 100 characters. Only alphabets, numbers, spaces, and underscores are allowed.
 - **Description** - The Form Definition description. You can enter between 3 to 100 characters. Only alphabets, numbers, spaces, and underscores are allowed.
 - **Row Limit Per File** - The number of maximum table rows allowed per file. The minimum number of rows is 100 and the maximum limit is 100000.

For example, if you have 500 rows in a table and the row limit is set to 100, then the table is split into 5 files.

3. Click **Continue** to proceed with the **Entity and Attributes Details** tab.
4. **Compress File**: Keep this option selected to automatically compress files into a .zip archive when downloading. Example: If you have 500 rows in a table and the row limit is set to 100, then the table is split into 5 files. With the **Compress File** option enabled, the user can download these 5 files compressed into a single .zip file.
5. **Redaction**: Keep this option selected to redact personal information (PI) from users who do not have the DATASEcurity role. For more details, see [User Role Mapping and Access Rights](#).

For information on how full and partial redaction are performed, see [Redaction Functions](#) in Data Security Management Guide.

- The redacted data is displayed as stored in the database. Example: For the number data type, if the redacted data is appearing as 0, the Data Preview window shows the data as 0. Similarly, for the VARCHAR data type, if the redacted data is appearing empty in the database, the Data Preview window shows the data as empty.
 - If the report contains redacted data, the user must have the DATASEcurity role to download it from the **Forms Definition – Summary** page.
6. Select the table that you want to modify in the **Entity** Field.

If the selected table have child tables, the child tables is also displayed. You can select the required Child tables for which you wish to input the data during data entry.

Note

You can select up to four Child tables only for each Master table.

7. Select the **Filter** from the existing filters in the drop-down list or click **Filter** to [apply a new attribute filter](#) to the form definition.
8. Click **Select columns** to view only specific columns.
9. Enable **Auto Approve** if you want the Forms Definition to be automatically approved from Forms Definition Summary page and is enabled for data entry.

Alternatively, you can also get the form approved manually. For manual approval, disable the auto approve option.

A user with the required role can then perform the data entry without the need for an approval process. For more information, see [User Role Mapping and Access Rights](#).

10. Click the drop-down arrow corresponding to the table in the **Entity Name**, to view the source attributes from the table and the mapped attributes from the Excel file.

If the selected table has Child tables, the Child tables that you select from the Mapped Entities tab are also displayed in the **Attributes** tab. You can configure the attributes for the master table and its child tables.

11. Click **Continue** to access the **Data Preview** tab preview the form data.
12. Click **Submit** if you want to submit the Forms Definition for manual/auto approval.

For more information refer to [Approving and Rejecting New Form Definitions](#). After approval/auto approval, the form is added to the **Form Definition Summary**.

Creating Data Filters for New Form Definitions

Filters help to view and export specific set of data from data exporter forms.

Complete the following steps if you want to add filters to the Forms Definition:

1. Click **Filter**, to access the **Filter Condition** pane.
2. Enter/ select the following details.
 - **Column** - Select the column from the applying the filter.
 - **Condition** - Select one of the following filter conditions, to filter the column data.
 - **Comparison** - '=', '!=', '< >', '>', '<', '>=, <=','IN', 'NOT IN', 'ANY', 'BETWEEN', 'LIKE', 'IS NULL', and 'IS NOT NULL'.
 - **Type** - Select one of the following filter types.
 - **Static** - Select Static, to enter a value and execute the filter using only one value. You cannot change the value at a later point.
 - **Dynamic** - Select Dynamic, to change the filter value when needed. After setting the filter type to Dynamic, select the **Placeholder** and set one of the default seeded values, to process the filter.

Note

Only values that are already seeded in the Database table, are displayed in the Placeholder drop-down list.

- **Filter Value** - Select/enter the filter value.

Note

For Language Placeholder the default locale language is displayed and cannot be modified.

3. Click **Add** to add a new Filter expression. You can add multiple Filter expressions to the same filter.

The filter is added to the list of filters.

Mouse-over the place holder filter, to view more details about the filter.
4. Click **Validate** to verify the filter condition is valid.

A confirmation is message is displayed, if the filter is valid.
5. Click **Apply**, to add the new filter to the filter condition.
6. Click **Reset**, to clear all the filter expressions and create a new expression.
7. Click **Delete** to delete an existing filter expression.
8. Click **Edit** to modify a filter expression. After editing the expression, click **Validate**, to verify if the condition is valid.
9. Click **Apply** to add the filter expression to the form definition.

Enabling Data Security for New Form Definitions

Data security conditions allows you to apply certain filters when a user performs the data entry for the table records for each approved Forms Definition from the Data Entry page.

Consider that you configure the condition COUNTRY_NAME = 'INDIA' for the reference table **DIM_COUNTRY**. When a user performs the data entry for this Forms Definition from the Forms Definition - Summary Page and enters a country name other than 'INDIA', the record gets rejected by the application when another user approves this record.

Complete the following steps to configure Data Security for the Forms Definition:

1. Select the check box next to the **Attribute Name**, in the **Mapped Attributes** Column.

Note

Data Security information must be configured for each attribute name, separately.

2. Click the **Lock** icon, to access the **Data Security** page.
3. Select the **Reference Table** based on which you want to build your condition from the Reference Table drop-down list.
4. Select the required column, condition, and filter value, and build the required expression.
5. Click **Apply**, to enable the data security for the new form definitions.

Enabling User Security for New Form Definitions

The User Security option helps you to select the users/user groups who can add, edit, delete and/or authorize data entry.

To enable user security:

- Select the required user group or user to assign permissions from the **Map Users / Groups**, to complete the user security configuration.

When you select the user group or user, the permissions for each approved Forms Definition are displayed. These permissions are the actions that the selected user group or user can perform while performing Data Entry.

Table 5-5 Permissions in the Map Users / Groups Pane

Option	Description
Add /Edit	Add or modify records in an approved Forms Definition
Delete	Delete records in an approved Forms Definition
Authorize	Authorize the records in an approved Forms Definition
Duration From	Optional. Select the start date for which the permissions are available to the user or user group.
Duration To	Optional. Select the end date for which the permissions are available to the user or user group.

Note

If you select a user group for User Security, you can view the users mapped to that group by clicking the **Users** icon.

Approving and Rejecting New Form Definitions

You can validate and approve the new Forms Definition if you have the required role assigned to you.

If the configuration in the Forms Definition is incorrect, you can reject the Forms Definition. The rejected Forms Definition changes into Draft status. You can then request the required user to edit the Forms Definition and submit it for approval again.

You can also view, copy, and edit each Forms Definition from the Forms Definition – Summary page by clicking Menu. These actions are available based on the roles assigned to you. For more information, refer [User Role Mapping and Access Rights](#).

Approving a Forms Definition

You can approve new forms based on the assigned roles.

To check about the assigned roles, refer [User Role Mapping and Access Rights](#).

To approve a Forms Definition:

1. In the Form Builder, click **Menu** in the Forms Definition that is in **Pending Approval** status, and then click **Approve**, to access the **Configure** page.
2. Click **Approve** and then enter the required description for the approval in the Comments field.
3. Click **Submit**, to approve the form definition and view it in the **Data Entry** page.

Once the form is approved, you can [edit/amend the approved forms](#) if you have **DMIDGNAMND** role assigned.

Rejecting a Forms Definition

You can reject new forms based on the assigned roles.

To check about the assigned roles, refer [User Role Mapping and Access Rights](#).

To reject a Forms Definition:

1. In the Form Builder, click **Menu** in the Forms Definition that is in **Pending Approval** status, and then click **Reject**, to access the **Configure** page.
2. Click **Reject** and then enter the required description for the approval in the Comments field.
3. Click **Submit**.

The Forms Definition is rejected, moved to **draft** status. The form definition is displayed in Forms Definition Summary page. You can then edit the Forms Definition in draft status and submit it for approval again.

For more information on editing a Forms Definition, see [Editing Form Definitions](#).

Managing Form Definitions

You can view, edit, copy, and delete the existing Form Definitions from the Form Definition Summary Page, based on the assigned roles.

To check about the assigned roles, refer to [User Role Mapping and Access Rights](#).

In the Summary Page, highlight a specific Definition and click **Action**. The following options are displayed:

Table 5-6 Action Details

Action	Description
View	View the Member details for a specific Member Definition.
Edit/Amend	Edit/amend the Member details of a form definition.
Copy	Copy the Member Definition Details and create another Member Definition by changing Alphanumeric Code, Numeric Code and Name.
Re-Upload	Upload a new Excel sheet for an Excel upload form definition. You need to delete the attached excel sheet before uploading the new data.
Delete	
Approve	If you have the required role, you can approve a new Form that is in Awaiting Approval status. For more information, refer to Approving a Forms Definition .
Reject	If you have the required role, you can approve a new Form that is in Awaiting Approval status. For more information, refer to Rejecting a Forms Definition .

Viewing Form Definitions

You can view the form definition details using the View option, based on the assigned roles.

To check about the assigned roles, refer [User Role Mapping and Access Rights](#).

You can view the details of an individual Form Definition:

1. Highlight the Form Definition and click **Action**.
2. Click **View**, to access the **Form Definition page** with the selected Form definition details.

Editing/Amending Form Definitions

You can modify both approved and rejected form definitions, based on the assigned roles.

To check about the assigned roles, refer [User Role Mapping and Access Rights](#). Forms that are already approved cannot be edited. You can amend the approved forms if you have **DMIDGNAMND** role assigned.

Note

You cannot amend an approved form, if the form has any pending data entry activity.

To edit individual form details:

1. Highlight the form definition and click the **Action**.
2. Click **Edit**, to access the **Form Definition page** with the details.

To modify an approved form, click **Amend**.

3. Update the required information and click **Submit**.

You can also **auto-approve** the form during submission.

The modified form definition is updated in the form design summary.

Copying Form Definitions

You can copy individual Definition Details, to recreate another new Definition, if you have assigned roles.

To check about the assigned roles, refer [User Role Mapping and Access Rights](#).

To copy an existing form definition:

1. Highlight the Definition and click **Action**.
2. Click **Copy**, to view the **Form Definition Page**.
3. Edit the unique information and modify details like entity table, attribute filters, user and data security details and click **Save**, to create a new form definition.

Deleting Form Definitions

You can delete the form definitions that are in Draft status, based on the assigned roles.

To check about the assigned roles, refer [User Role Mapping and Access Rights](#).

To delete a form definition :

1. Highlight the form definition and click the **Action**
2. click **Delete**.

The selected form definition is deleted after confirmation.

Data Entry

The Data Entry feature of Data Maintenance Interface (DMI) enables you to maintain or modify the table data by using the Forms Definition that is created and approved from Forms Definition Summary page. For more information on Forms Definitions, see [Creating Forms Definition](#).

If the approved Forms Definition is created by using the designer option, a user with the necessary role can add or modify the records in the table as per the configuration in the Forms Definition. These records are then sent to another user with the necessary permission for final approval.

If the approved Forms Definition is created by using an Excel file, a user with the necessary permission can verify and approve the records that are modified with the values from the Excel

file. If the records modified by the Excel file are incorrect, the user can reject the records. The rejected record can be modified by a different user with the necessary role and can be sent for the final approval again. The Forms Definitions that are created by using an Excel file are labeled with an Excel icon in Data Entry.

Viewing Data Entry

You can view records based on the assigned roles. For more information about the roles, refer to [User Role Mapping and Access Rights](#).

Complete the following steps to view Data entry:

1. Login to your Oracle Cloud account, with the required credentials to access DMI.
2. Select an application, to access the DMI for that application.

For example, to access DMI for CFECS, select **Cash Flow Engine Cloud Service (CFECS)**.

Note

The navigation steps vary for different applications. Refer to the respective application documentation for accessing Data Maintenance Interface.

3. Click **Data Management Tools** and click **Data Management Interface**.

The **Navigation List** is displayed.

4. Click **Data Entry**.

The **Data Entry page** is displayed. All the approved forms are displayed in the Data Entry page. Forms in Draft and Awaiting Approval status can be accessed from the Form Builder page.

Adding Data to Table – Forms Created Using Data Entry

If the Forms Definition is created using the designer option, the user with the necessary role can add or delete records and also update the values for the table records as per the configuration in the Forms Definition.

These records are then submitted for approval to another user with the necessary role. For more information, refer to [User Role Mapping and Access Rights](#).

To update/delete data in the table records:

1. Highlight the record and click the **Action**.
2. Click **Edit**, to update the records.

The records are classified based on the following Status:

- **Draft** – Records that are created but not submitted. In Draft state, you can add new rows or delete/edit an existing row submitted for auto-approval.
- **Ready** – Records that are approved. You can only edit the records.

For adding/deleting records and editing existing draft or Ready records, refer to the following sections:

Related Topics

- [Adding/Editing a Draft Record](#)
You can add a record to the table or edit a record set in the Draft status. The added record is set to Draft status.
- [Deleting Draft Records](#)

Adding/Editing a Draft Record

You can add a record to the table or edit a record set in the Draft status. The added record is set to Draft status.

When adding/editing a draft record, the data is displayed as entered in the UI. You can view/modify data in the personal information (PI) columns based on the assigned roles. For more information about the roles, refer to [User Role Mapping and Access Rights](#).

To add or edit a draft record:

1. Select **Draft** from the **Status** drop-down list, to view all the entity records set to **Draft** status.
2. To add a new record, click **Add**.
A new entry set to **Draft** status is added to Entity details page. This entry is empty. Edit the record to add the attribute details.
3. To edit a record, click **Edit** next to the record.
4. In the **Edit** page, enter the values in the attributes that you want to modify and click **OK**.
You can repeat the steps for all the records for which the data needs to be entered.
5. To modify all the entries in a specific column, click **Bulk Update**.
 - a. Select the column to modify the data.
 - b. Enter the new value and click **OK**.
6. Click the modified record in draft status, and then click **Submit for Approval** or **Submit with Auto Approval**.

If the record is submitted with auto approval, it is approved instantaneously.

If the record is submitted for approval, is sent for approval, and is changed to **Awaiting status**. A user with the necessary role can approve these records. For more information, see [Approving and Rejecting Records after Data Entry](#).

After approval, the status is changed from **Draft** to **Ready** status. Refer [Editing Approved Records](#), to edit the records in **Ready** status.

Note

If the user has configured the **Participate In Data Security** option while creating a Forms Definition, you must enter the value as per the configured condition. If you enter a value that does not meet the condition, then the record is rejected by the application and the approval gets failed. You can view the details of the rejection by using the Audit trail option for each record. For information on the Participate In Data Security option, see [Enabling Data Security for New Form Definitions](#).

Deleting Draft Records

You can delete the records in Draft status. If the record is approved and moved to Ready status, it cannot be deleted.

1. Select **Draft** from the Status drop-down list.

The entity records with Draft status are displayed for entering data are displayed.

2. Select a record and click **Delete**.

To delete multiple records, select all the required records and click **Delete**.

To bulk delete all the records, select the Check box on the Header. All the records are selected. Then, click **Delete**.

Editing Approved Records

The approved records are set to Ready Status.

When editing records in Ready Status, the data is displayed as stored in the database. You can view/modify data in the personal information (PI) columns based on the assigned roles. For more information about the roles, refer to [User Role Mapping and Access Rights](#).

When you edit the record, it is moved to Draft Status.

1. Select **Ready** from the Status drop-down list, to view the entity records with Ready status are displayed.

2. To edit a record, click **Edit** next to the record.

3. Update the values for the attributes that you want to modify and click **OK**.

You can repeat the steps for all the records for which the data needs to be entered.

4. To modify all the entries in a specific column, click **Bulk Update**.

- a. Select the column to modify the data.

- b. Enter the new value and click **OK**.

5. Click the modified record in draft status, and then click **Submit for Approval** or **Submit with Auto Approval**.

To submit multiple records, select all the required records and click **Submit**.

To bulk submit all the records, select the check-box on the header. All the records are selected. Then, click **Submit**.

If the record is submitted with auto approval, it is approved instantaneously. The record is sent for approval and is changed to Awaiting status. A user with the necessary role can approve these records. For more information, see [Approving and Rejecting Records after Data Entry](#).

Note

If the user has configured the Participate In Data Security option while creating a Forms Definition, you must enter the value as per the configured condition. If you enter a value that does not meet the condition, then the record is rejected by the application and the approval gets failed. You can view the details of the rejection by using the Audit trail option for each record. For information on the Participate In Data Security option, see [Enabling Data Security for New Form Definitions](#).

Forms Created Using Excel Upload

When a Forms Definition created using an Excel file is approved from Forms Definition Summary Page, the table records in the selected table are updated using the data in the Excel file.

The records are set to **Awaiting** status for the approved forms definition in data entry page. You can verify the records modified by the Excel file records and approve them if you are assigned to the necessary role. If the records modified by the Excel file are incorrect, you can reject the records. The status of the rejected records is changed to Draft. A user with the necessary role can edit the records in draft status and submit them for approval again.

- To approve records, see [Approving a Draft Record](#).
- To reject records, see [Rejecting a Record](#).
- To edit a record in draft status, see [Editing a Rejected Record](#).

Approving and Rejecting Records

A user with the necessary role can approve or reject the edited records.

For more information related to user roles, refer to [User Role Mapping and Access Rights](#).

Approving Draft Records

You can approve the records set to Draft status.

To approve records :

1. In the **Data Entry** page, select **Draft** from the **Status** drop-down list.

The entity records with Draft status are displayed.

2. Select the required record.

You can select multiple records, to perform bulk Approval. Bulk Approval is enabled only if Bulk Authorization is activated during Form Creation.

3. Enter the required comment in the Comments Field, and then click **Approve**.

The record is approved successfully with the values from the Excel file.

Rejecting a Record

You can reject an record set to Awaiting status.

To reject a record :

1. Click **Menu** in the required Forms Definition from the Data Entry page.

2. Click **Edit**.

The Entity Details page is displayed. The records that are waiting for the final approval are displayed here.

Select the required record, and then click **Reject**.

You can select multiple records to perform bulk rejection. Bulk rejection is enabled only if Bulk Authorization is activated during Form Creation.

3. Enter the required comment in the Comments field, and then click **Reject**.

The record is rejected, and the status is changed to **Draft**. A user with the necessary role can now edit the record.

Editing a Rejected Record

You can edit the records that are in draft status and send them approval to the user with the necessary role.

To edit a record:

1. Select **Draft** from the **Status** drop-down list.
2. Click **Edit** in the record that you want to edit.
3. Modify the required attributes, and click **OK**.
4. Select the record and then click **Send for Approval**.

The modified record is now moved to **Awaiting** status. A user with the necessary role can approve the record.

Note

If the user has configured the **Participate In Data Security** option while creating a Forms Definition, you must enter the value as per the configured condition. If an incorrect value is entered, the record gets rejected by the application and the approval is failed. You can view the details of the rejection by using the Audit Trail option for each record. For information on the Participate In Data Security option, see [Enabling Data Security for New Form Definitions](#).

Exporting Data Exporter Form Definitions

After creating data exporter form definitions, you can export or download the reports to CSV or JSON format.

To export or download a report:

- In the Data Entry summary page, click **Action** next to the data exporter form to be exported and select one of the following options
 - [Custom Export](#) - export the report only for selected attributes. You can also create and apply filter conditions to specific columns to generate customized reports.
 - [Export](#) - export the report for all the attributes. A complete report including all the records and attributes is generated.

Custom Exporting Data Exporter Forms

When you create forms using Data Exporter option, you can export the report to .CSV format.

To custom export data exporter forms :

1. Click **Action** next to the form to be exported and click **Custom Export**, to view the **Data Exporter - Configure** page.
2. Click **Start**, to access the **Entity and Attributes** tab.
3. Select the attributes to be added to the custom report.
4. Click **Continue**, to view the **Filters** tab.

5. Set the filter conditions for specific columns and click Continue to view the **Data Preview** tab.
6. Select the report file format (.CSV or JSON) and also the number of records per page.
7. View the list of records to validate the data.
8. Click **Export** to export the report in CSV format.
The Data export request will be submitted.
9. Proceed to the Data entry page to view the [status of the form and download the report](#).

Exporting Data Exporter Forms

Forms created using Data Export option can be exported as a .CSV file or a JSON file.

Export Data Exporter forms:

1. Click **Action** next to the form to be exported and click **Export**.
The Data export request is submitted.
2. Proceed to the Data entry page to view the status of the form and download the report.

Viewing Data Exporter Report Status

View the status of all the reports generated based on a Data Exporter form.

To view report status:

- Click **Action** next to the form to be exported and click **Status/Download**, to view the status of all the reports generated for a specific data exporter form.

Downloading Reports

You can download the reports exported as .CSV file.

If the report contains redacted data, you must have the DATASEcurity role to download it. See [User Role Mapping and Access Rights](#).

To download a report:

1. Click **Data View**.
The **Data Entry page** is displayed.
2. Click **Action** next to the form to be exported and click **Status/Download**, to access the **Data exporter Report Status** page.
3. Click the **Download** icon adjacent to a report to download the report to the local directory in .CSV format.

You can also copy the link to download the report. Enter the link in a Web browser, to access the report.

Perform Excel Re-upload on an Approved Excel Form Definition

After an Excel form definition is uploaded and approved using the Form Designer/Builder screen, you can re-upload the Excel file with additional data, if needed.

To do this, use the **Data View** screen.

Note

- You can re-upload Excel files for both manual and auto approved forms.
- This action depends on your assigned user role. To verify your permissions, refer to [User Role Mapping and Access Rights](#).

To perform an Excel re-upload

1. On the Data View screen, click the action button corresponding to the Excel form and select **Excel Upload**. The **Excel Upload** UI appears.

Note

If you have records in draft or awaiting status, you cannot re-upload the Excel file.

2. Click **Drag and Drop** and select the Excel file you want to upload. Note: Make sure the file matches the correct form definition. To ensure your file uses the right format, download the template using the **File Template** button.
3. Review the information shown in the Data Preview section.
4. Click **Submit** for approval.

Approving and Rejecting Re-Uploaded Excel Forms

You can approve or reject re-uploaded Excel form definitions, but only for forms that were uploaded and approved manually. (The Maker-Checker validation applies to this action).

Forms that were auto-approved cannot be manually approved or rejected.

To approve or reject Excel Upload records

1. On the Data View screen, click the action button corresponding to the Excel form and select **Approve/Reject** Files.

The **Pending Approval** page appears.

2. Click Preview to review the record being approved or rejected.
3. Enter your review comments.
4. Click **Approve** or **Reject** as appropriate.
5. Click the refresh button to view the status, once the process is completed.

The **Excel Upload** UI appears, displaying the Upload History, including:

- File Name
- Processing Status
- Uploaded Data Count
- Approval Comments
- Date of creation
- Total Number of Uploads
- Completed Uploads

Adding DMI Tasks in Scheduler Service

The Data maintenance Interface is now integrated with the Scheduler services and you can use Scheduler services, to process form definitions created using Data Exporter.

By using Scheduler Services for DMI automation, you can automate and streamline the data processing for form definitions created using the Data Exporter options.

Ensure that you have the assigned roles to perform automated data exporter form download.

To schedule a DMI task for form definitions created using Data Exporter:

1. Log in to your **Cloud services** and access **Scheduler Services**.
2. Select [Define Batch](#), to view the list of existing batches.
3. In the Define Batch page, click **Create**, to access the [Create Batch](#) page.
4. Enter the generic Batch information (**Code, Batch Name, Batch Description, and Batch Parameters**), and click **Save** to create a new Batch and proceed with creating a new Task.
5. In the **Left Navigation list**, select [Define Tasks](#), to access the list of existing tasks.
6. In the Define Task page, select the **DMI Batch** to associate the new task
7. Click **Add**, to [Create a new task](#).
8. Enter the generic Task details (**Task Code, Task Name and Task Description**), and the following DMI specific details:
 - **Component** - Select Data Maintenance Interface, to assign this as a DMI specific task.
 - **Report Template** - Select **Pre-defined template**, to access the following DMI specific template parameters.
 - **App ID** - The unique application ID of the application utilizing the Scheduler services for task automation.
 - **Module Name** - Select the module required for the DMI tasks, from the list of Seeded modules.
 - **Report Code** - Select the Report code to be added to the generated report.
 - **Report Type** - Set the report type to CSV/JSON.
 - **Available Place holders** - (Optional). Select the placeholder required for the report.
 - **Placeholder Values** - (Optional). Enter the placeholder values to be included in the generated report.
 - **Additional Filters** - (Optional). Enter the filters to be applied to the data, to generate reports with specific information. For details, see [Dynamically export relevant records](#).
 - **Report Name Prefix** - (Optional). Enter the unique prefix to be added to the report name for easy identification of the report.
 - **Report Name** - (Optional). Provide a name for the report to be generated.

Note

If the export definition was created before 24D release, you must recreate it. This is required because an enhancement in Scheduler Services now captures the base URL as part of the definition.

9. Click **Save** to create a new DMI specific task, and proceed with scheduling the batch.
10. In the Left Navigation list, select [Schedule Batch](#), to access the list of batches.
11. Select the DMI batch for execution and click **Execute**.
12. During batch execution, click [Monitor Batch](#), to check the progress.
13. Select the **Batch** and the **Run ID** to access the required task, and click **Start Monitor** to view the task execution progress in the **Visualizations** tab.
14. Click **List View** to view the task execution details of all the executed tasks.
After the task execution is complete, the generated report is saved to the object store.
15. Click **View Execution Logs** corresponding to the DMI task, to view the execution log information.
16. Scroll to the required **Batch Run Id** and **copy the log details to clipboard**.
17. Paste the copied log information to a notepad, to get the [PAR URL for downloading the report](#).
18. Paste the PAR URL in a Web browser, to download the report to the local directory.

Dynamically export relevant records

When creating a DMI task, you can use filters to dynamically export only the relevant records.

The following dynamic filters are available:

- Additional Filter
- Placeholder Filter

In addition to static values, these filters accept the following dynamic variables:

- \$FICMISDATE\$
- \$BATCHRUNID\$

Set the filters in the following format:

```
DATA_TABLE.<AS_OF_DATE> = $FICMISDATE$ AND DATA_TABLE.<EXECUTION_ID>
= $BATCHRUNID$
```

Example: FSI_ALM_CASHFLOW_OUTPUT_HIST.AS_OF_DATE = \$FICMISDATE\$ AND
FSI_ALM_CASHFLOW_OUTPUT_HIST.EXECUTION_ID = \$BATCHRUNID\$

Date format supplied by scheduler for \$FICMISDATE\$ is YYYY-MM-DD.

Balance Reconciliation

The Profitability and Balance Sheet Management Cloud Service's Balance Reconciliation module helps you to Reconcile the selected processing/instrument/account balances against

the Management Ledger. If any differences are found, you will have the flexibility to choose significant differences and create plug entries for those in the Ledger_Instruments table.

① Note

All General Ledger Accounts must mandatorily have a Reconciliation product mapped to them.

You can define the dummy attributes for the Product-Currency combinations, whichever General Ledger Account is used for Reconciliation. Default dummy attributes are auto populated based on the linked product ID and currency selected in Reconciliation dimensions.

Reconciliation is a three-step process.

- Reconciliation Definition and Default Attributes setup
- Reconciliation Report verification
- Plug entry creation and writing the Reconciliation differences back to Ledger Instruments table

To access the Balance Reconciliation module, from the LHS Menu, navigate to **Data Management Tools**, and select **Balance Reconciliation**.

The Balance Reconciliation landing screen displays the following two cards:

- Reconciliation Definition
- Default Attributes

① Note

1. Ledger Balances with Balance Type CD as only 0, will be considered for reconciliation.
2. Balance Sheet category will be derived based on Common COA linked as attribute with selected GL account, which subsequently has Account Type defined as attribute of the concerned Common COA.
3. Reconciliation Product must be defined as attribute of GL accounts which participate in reconciliation, so system can pick account attributes for the plug entry creation.

Reconciliation Definition

The Reconciliation Definition summary screen allows you to search for any definitions from the displayed list.

The Balance Reconciliation Summary Screen is as follows:

Figure 5-6 Balance Reconciliation Summary Screen

Name	Creation Date	Created By	Modified Date	Modified By	Folder	Action
balance recon test1	06/03/2026 06:52:43	FTP_ADMIN	06/03/2026 06:55:54	FTP_ADMIN	FOLDERID	...
catTest1	14/04/2026 09:48:59	FTP_ADMIN	15/04/2026 06:48:53	FTP_ADMIN	FOLDERID	...
enteredBalagbook	01/04/2026 12:47:25	FTP_ADMIN	01/04/2026 12:47:25	FTP_ADMIN	FOLDERID	...
enteredBaltest1	01/04/2026 12:42:02	管理ユーザー	01/04/2026 12:42:02	管理ユーザー	COMMON	...
plugentry1	27/03/2026 03:45:56	FTP_ADMIN	27/03/2026 03:45:56	FTP_ADMIN	FOLDERID	...
procedureTest1	17/03/2026 12:28:26	FTP_ADMIN	26/03/2026 14:30:27	FTP_ADMIN	FOLDERID	...

This screen displays the following definition attributes for easy identification:

- Name
- Creation Date
- Created By
- Modified Date
- Modified By
- Folder
- Action menu (ellipsis icon) for additional operations such as View/Edit, Delete, and other options

Adding a New Reconciliation Definition

The Create Reconciliation screen allows you to define a new Reconciliation Definition.

To add a new Reconciliation Definition, click the **Add** button on the summary screen.

Figure 5-7 Create Reconciliation Definition Screen

The screenshot displays the 'Balance Reconciliation' application window. The main form is titled 'Reconciliation Definition'. It contains the following sections:

- Reconciliation Definition:** Includes input fields for 'Name' and 'Description', and a dropdown menu for 'Currency' (currently set to 'COMMON').
- Balances & Tables:** Contains four dropdown menus: 'Ledger Balance' (set to 'Average Balance'), 'Instrument Balance' (set to 'Average Book Balance'), 'Source Tables' (set to 'Asset'), and 'Ledger Tables' (set to 'Management Ledger').
- Reconciliation Dimensions:** Features a list of dimensions on the left: 'Common Chart of Accounts', 'General Ledger Account', 'KPO001', 'KPO002', 'Legal Entity', 'Organizational Unit', 'Product', and 'Currencies'. The right side of this section shows 'No items to display'.
- Audit Panel:** Located at the bottom, it has three tabs: 'Audit', 'Comments', and 'Tags'.

Reconciliation Definition set up allows you to choose for which Instrument Table, across which Dimensions and on which Balance Type (Cur Book Bal or Cur Par Bal); you would like to perform reconciliation. For example, you can choose to reconcile against just GL Account ID and Currency or do reconciliation at much granular level by selecting the Org Unit, Legal Entity along with GL Account ID and Currency.

While selecting reconciliation key dimensions, you have the option to choose from activated placeholder dimensions as well along with seeded key dimensions.

Similarly, there is a seeded FSI_D_MANAGEMENT_LEDGER table, which will be used by default for balance reconciliation against selected portfolio of accounts. In case, there are any activated placeholder management ledgers as well, those will also be available for selection and subsequently for balance reconciliation.

Reconciliation Balance

Management Ledger stores balance using Financial Elements, while corresponding Cur/Avg Balance can be picked directly from the dedicated columns in the Instrument Tables. So, you have an option to choose if you want to reconcile against 100 (ending balance)/140 (average balance). In the Management Ledger for FE 100, you can further select between CUR_BOOK_BAL/CUR_PAR_BAL from Instrument table. By Default, CUR_PAR_BAL would remain selected. You are allowed to create plug entries only when comparison is done against ending balance. For Average balance, you can only see the difference report but would not be allowed to create plug entries.

Reconciliation is performed based on the selected dimensions. The entered or functional balance is automatically picked based on whether Currency is selected as a reconciliation dimension:

- If Currency is included in the selected dimension, the system uses the entered balance.
- If Currency is not included in the selected dimension, the system uses the functional balance.

You can do the comparison only for Asset, Liability, or can include Ledger Instrument table also. At run time, the As-of-Date can be passed for which Balance Reconciliation will be performed.

Actions Performed on Reconciliation Definition

To delete one or multiple Reconciliation Definitions, you can select the checkboxes against each one of them and press the **Delete** button.


A confirmation message will let you confirm and delete selected definitions.

You can also perform search based on following fields:

- Name
- Reconciliation Dimensions
- Source tables against which reconciliation is performed
- Folder where the reconciliation definition is stored

The following screen display the **Actions** menu from which the different actions that you can perform on existing Reconciliation Definitions.


Figure 5-8 Actions Icon and Different Actions

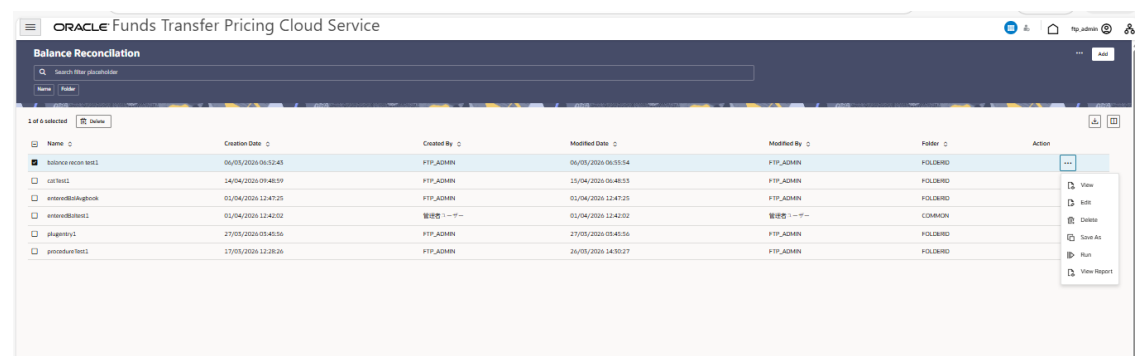

The following are the actions:

- **View:** Click this action button and view the definition in read only format.
- **Edit:** Click this action button and edit the definition.
- **Delete:** Click this action to delete the selected definition.
- **Save As:** Click this action to create a new definition by copying the selected definition.
- **Run:** Click this action to execute the reconciliation based on the selected parameters. As-of-Date is a run time parameter, you can choose for which date reconciliation needs to be performed.
- **View Report:** Click this action to view the generated Reconciliation Report for the selected run.

Figure 5-9 Reconciliation Report

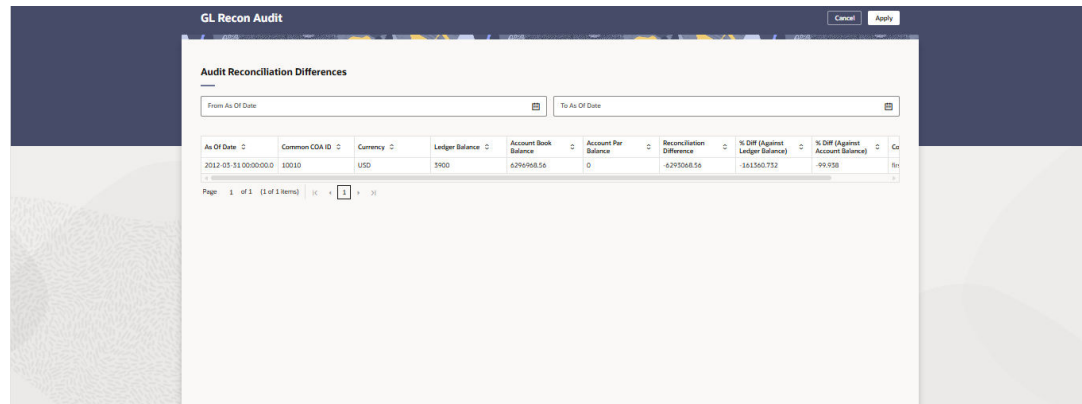


As Of Date	Common COA ID	Currency	Ledger Balance	Account Book Balance	Account Per Balance	Reconciliation Difference	% Diff (Against Ledger Balance)	% Diff (Against Account Balance)
2012-01-31 00:00:00.0	10010	USD	3900	6296968.56	0	-6293068.56	-161360.732	-99.938

If the **Reconcile Whole Balance Sheet** checkbox is selected, the system retrieves all available dimension combinations from both the **FSI_D_MGT_LEDGER** and the selected instrument tables, regardless of whether matching dimension combinations exist between the ledger and the instrument tables.

After clicking **Process**, the Reconciliation Difference Report will be generated as follows:

Report starts with the summary across Balance Sheet categories and difference buckets pie charts, which can help you to get an idea about the reconciliation difference in a quick glimpse.

Figure 5-10 Reconciliation Difference Report

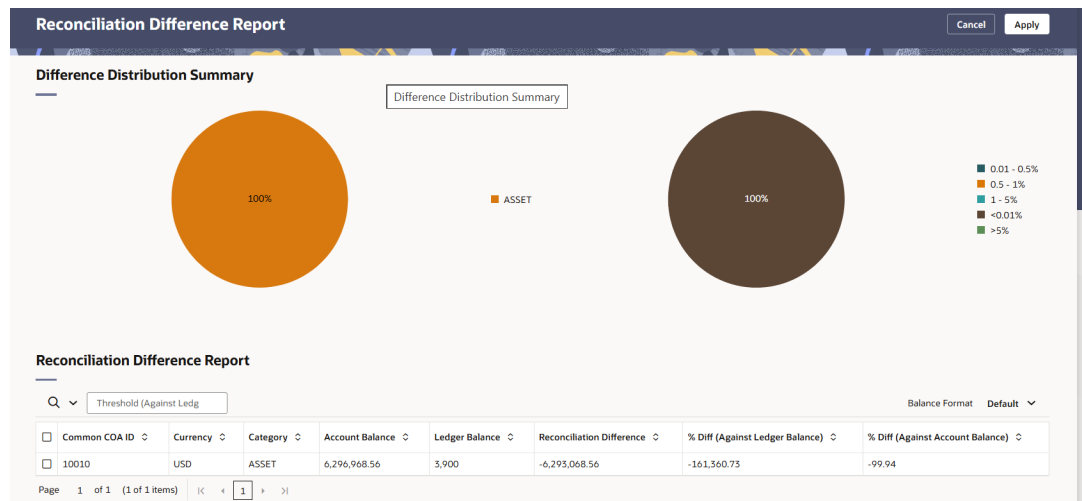

The detailed report is displayed as follows, where you can filter out insignificant difference using 'Threshold Percentage', also threshold can be applied at each row level or for whole Balance Sheet category level. If threshold is applied at Balance Sheet category level, all the rows that belong to the Balance Sheet category which is less than given percentage will be hidden from the Reconciliation Difference Report. A download button allows you to download the Reconciliation Report.

You can select **Filter at Category Level** toggle switch to apply threshold at 'consolidated difference reports', which is at balance sheet category level OR can directly apply the

threshold to each difference row, which is available at the unique combination of selected key dimensions.

You can select the **ID / Code** toggle switch to see the CD data. By default, the toggle switch displays the ID data.

You can also change the unit of balance to thousands or millions.

You can see difference in both percentage and absolute format.

Figure 5-11 Differences in Percentage and Absolute Formats

Category 5:		% Diff (Against Ledger Balance)								% Diff (Against Account Balance)		
ASSET		51.9302								108.0306		
☐	Category	GL Account	Currency	Legal Entity	Org Unit	Common COA	Product	Ledger Balance (Default)	Account Balance (Default)	Reconciliation Difference (Default)	% Diff (Against Ledger Balance)	% Diff (Against Account Balance)
☒	ASSET	Assets Ledger - 891	USD	NAB Sydney - 111	BENGALURU CITY BRANCH - 521	Off Balance Sheet - Payable - 1021	Vacation Loan - 1101	4,100,880.35	4,256,527.39	-155,647.04	3.7955	3.6570
☒	ASSET	Assets Ledger - 891	SGD	NAB Sydney - 111	BENGALURU CITY BRANCH - 521	Off Balance Sheet - Receivable - 1022	Vacation Loan - 1101	4,120,880.35	2,780,468.90	1,340,411.45	32.5273	48.2080
☒	ASSET	Assets Ledger - 891	USD	NAB Melbourne - 112	BENGALURU CITY BRANCH - 521	Off Balance Sheet - Receivable - 1022	Vacation Loan - 1101	3,858,995.78	5,971,756.48	-1,12,740.70	2.9215	2.8590
☒	ASSET	Assets Ledger - 891	USD	NAB Melbourne - 112	MYSURU CITY BRANCH - 522	Off Balance Sheet - Receivable - 1022	Vacation Loan - 1101	9,094,059.04	2,356,604.22	6,697,451.82	73.9718	284.1990
☒	ASSET	Assets Ledger - 891	USD	NAB Sydney - 111	BENGALURU CITY BRANCH - 521	Off Balance Sheet - Payable - 1021	Vehicle Loan - 1102	5,730,029.62	2,003,900.96	1,726,128.66	46.2765	86.1580


As a next step to create the plug entries for filtered rows, you can click the **Apply** button in extreme right corner. Following a grid appears, along with default attributes fetched from default product attributes: if you like, you can update any of these attributes before plug entries are created for the selected difference records. You can use the **Edit** and **Save** button to edit the default product attributes like Amortization Type, Interest Rate Code, and so on. You cannot edit any Code (CD) or VARCHAR attributes. Only attributes like Number, Rates, Dates, Term can be edited. All types of balances like Org balance, Current/Average balance are same as the reconciliation difference.

After you are convinced with the entered values for all the account attributes, you can click Apply. A job will be submitted and plug entries will be created in the FSI D Ledger Instruments table. To differentiate the plug entries from the customer real accounts, Data source CD will be used, with value 3, which signifies the 'Difference balance entries due to reconciliation performed between account and ledger'.

Figure 5-12 Differences in Percentage and Absolute Formats

As of Date: 31 January 2021										Apply
Search All Text Columns										Filter
Reconciliation Differences										
☐	☐	Category	GL Account	Currency	Legal Entity	Org Unit	Common COA	Product	Ledger Balance (Default)	
☒	☒	ASSET	Assets Ledger - 891	SGD	NAB Melbourne - 112	MYSURU CITY BRANCH - 522	Off Balance Sheet - Payable - 1021	Vehicle Loan - 1102	9,136,223.10	
☒	☒	ASSET	Assets Ledger - 891	SGD	NAB Melbourne - 112	BENGALURU CITY BRANCH - 521	Off Balance Sheet - Payable - 1021	Vacation Loan - 1101	5,098,574.10	
☒	☒	ASSET	Assets Ledger - 891	SGD	NAB Sydney - 111	MYSURU CITY BRANCH - 522	Off Balance Sheet - Receivable - 1022	Vacation Loan - 1101	1,287,589.10	
☒	☒	ASSET	Assets Ledger - 891	SGD	NAB Melbourne - 112	BENGALURU CITY BRANCH - 521	Off Balance Sheet - Payable - 1021	Vehicle Loan - 1102	5,132,612.10	
☒	☒	ASSET	Assets Ledger - 891	USD	NAB Melbourne - 112	BENGALURU CITY BRANCH - 521	Off Balance Sheet - Payable - 1021	Vehicle Loan - 1102	5,324,588.10	
☒	☒	ASSET	Assets Ledger - 891	SGD	NAB Melbourne - 112	MYSURU CITY BRANCH - 522	Off Balance Sheet - Payable - 1021	Vacation Loan - 1101	9,061,517.10	
☒	☒	ASSET	Assets Ledger - 891	SGD	NAB Melbourne - 112	BENGALURU CITY BRANCH - 521	Off Balance Sheet - Receivable - 1022	Vacation Loan - 1101	9,011,505.10	
☒	☒	ASSET	Assets Ledger - 891	USD	NAB Sydney - 111	BENGALURU CITY BRANCH - 521	Off Balance Sheet - Payable - 1021	Vacation Loan - 1101	4,100,880.35	

Figure 5-13 Plug Entries

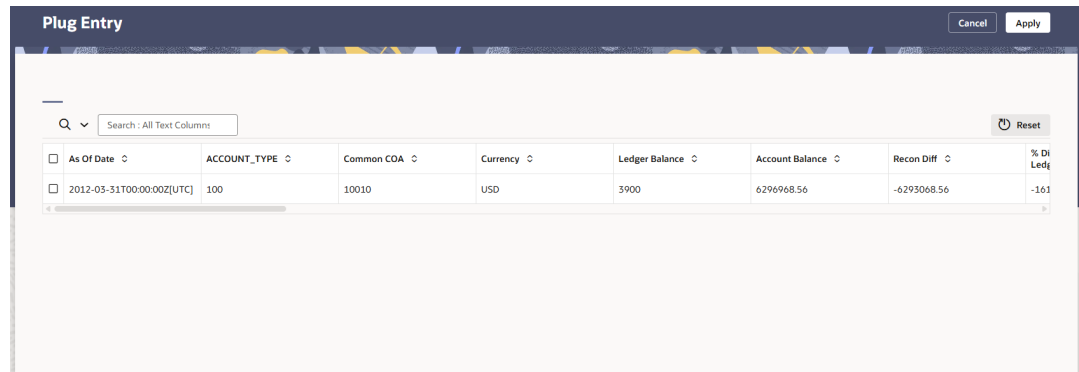


The screenshot shows the 'Plug Entry' window with a table of reconciliation data. The table has columns for 'As Of Date', 'ACCOUNT_TYPE', 'Common COA', 'Currency', 'Ledger Balance', 'Account Balance', 'Recon Diff', and '% Diff'. The data row shows a date of '2012-03-31T00:00:00Z[UTC]', account type '100', common COA '10010', currency 'USD', ledger balance '3900', account balance '6296968.56', reconciliation difference '-6293068.56', and percentage difference '-161'.

As Of Date	ACCOUNT_TYPE	Common COA	Currency	Ledger Balance	Account Balance	Recon Diff	% Diff
2012-03-31T00:00:00Z[UTC]	100	10010	USD	3900	6296968.56	-6293068.56	-161

- **Execution Details:** You can click this action button and view all the runs for a selected definition, along with the user information who has triggered the execution.

Figure 5-14 Execution Details

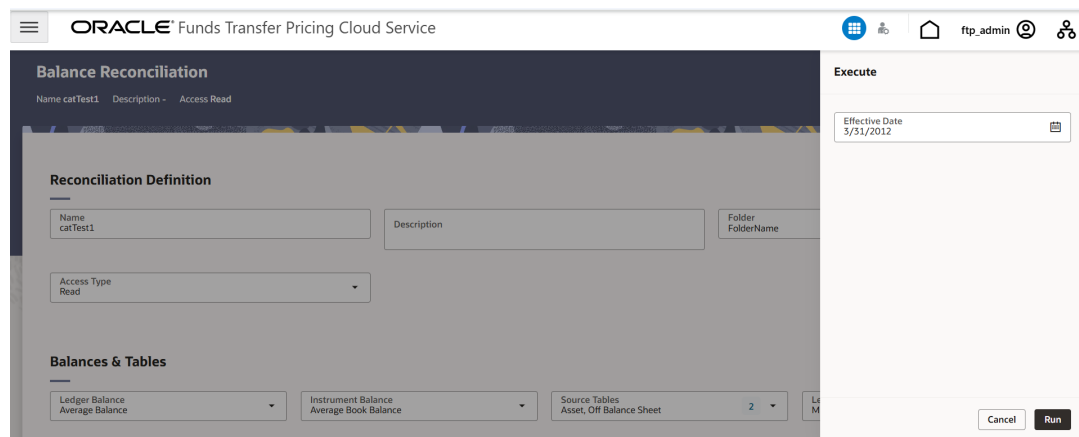

The screenshot shows the 'Execution Details' window. It includes a 'Reconciliation Definition' section with fields for Name (catTest1), Description, and FolderName. There is also an 'Access Type' dropdown set to 'Read'. Below this is a 'Balances & Tables' section with dropdowns for 'Ledger Balance' (Average Balance), 'Instrument Balance' (Average Book Balance), and 'Source Tables' (Asset, Off Balance Sheet). The 'Effective Date' is set to 3/31/2012. At the bottom right, there are 'Cancel' and 'Run' buttons.


Duplicate Runs for Same As-of-Date

If for a particular As-of-Date plug entries are already created, you have an option to cancel the latest run and exit without creating any plug entries.

You can append to existing entries for same As-of-Date. This case is possible if different reconciliation definitions are being executed for different instrument tables.

You can delete all the existing plug entries for concerned As-of-Date and create all fresh entries. This case is possible if the intermediate day runs took place locally and finally at night a global run took place.


Figure 5-15 Confirm Plug Entry Creation

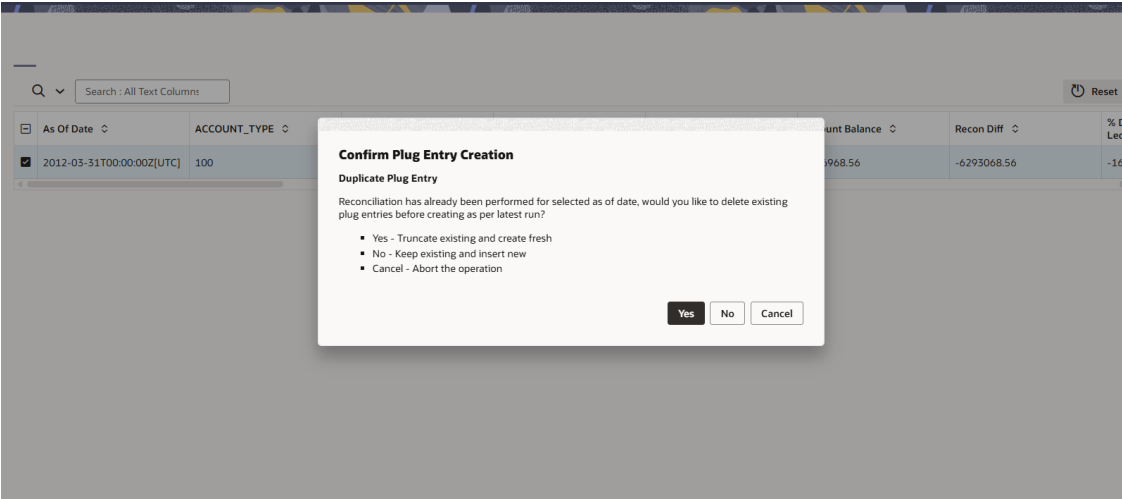

Balance Reconciliation Audit Report

You can open the Reconciliation Definition in **View** mode and get the Historical Difference Report using the **View Report** button.

Figure 5-16 View Reconciliation Report

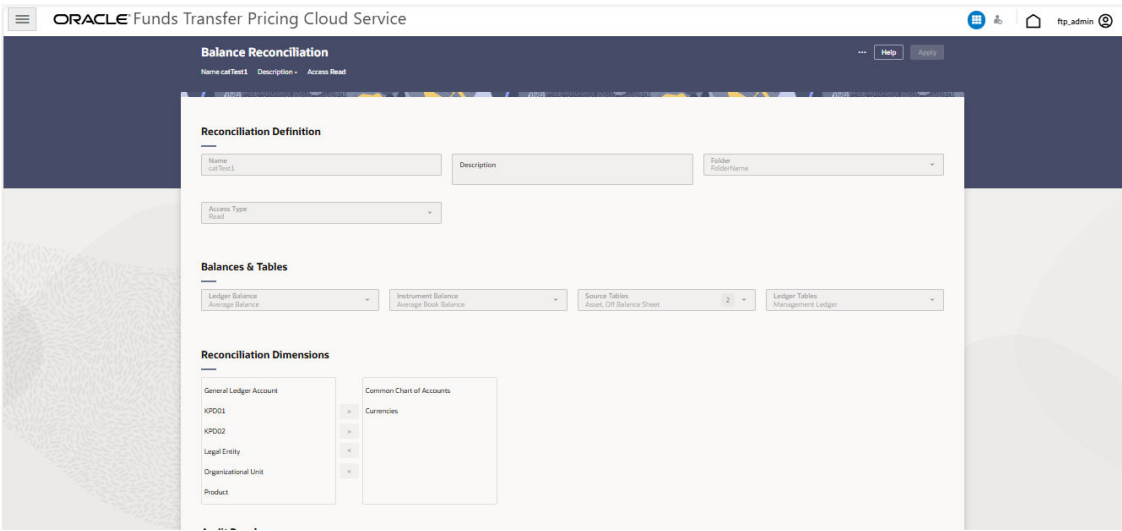

Here you can give a historical period by selecting the **From Date**, **To Date** and fetch all the reconciliation difference records along with the user comments to get the justification for plug entries creation.

Figure 5-17 Audit Reconciliation Differences

ORACLE Funds Transfer Pricing Cloud Service

ftp_admin

GL Recon Audit

Cancel Apply

Audit Reconciliation Differences

From As Of Date

To As Of Date

As Of Date	Common CDA ID	Currency	Ledger Balance	Account Book Balance	Account Pay Balance	Reconciliation Difference	% Diff (Against Ledger Balance)	% Diff (Against Account Balance)	Cu
2012-05-31 00:00:00.0	10010	USD	3900	4296998.56	0	-4293098.56	-161590.732	-99.958	fin

Page 1 of 1 (1 of 1 items) 1

Default Attributes

The following is the Default Attribute Summary screen, where you can find all the default attributes defined for various Product-Currency combinations.

Figure 5-18 The Default Attributes Summary screen

Default Attribute

Currency: Default Currency (000)

Product: Default Member (-1)

Cancel

Help

Save

Core Product Attributes

Amortization Type

Conventional

Adjustable Type

Fixed Rate

Interest Rate Code

WingbrookwingsPerpetualRC_01

Net Rate

12

Original Term

12

Original Term Type

Days

Payment Attributes

Payment Frequency

1

Payment Frequency Type

Days

Accrual Basis

30/360

Interest Type

Interest In Advance

Compounding Basis

Annual

Holiday Calendar

None

Holiday Rolling Convention

Following business day

Holiday Calc Option

Recalculate Payment

Remaining Number of Payments

1

Adjustable-Rate Attributes

Repricing Frequency

1

Repricing Frequency Type

Days

Rate Change Bounding Type

No Rounding

Net Margin

1

This screen includes the following sections:

- Core Product Attributes:
 - Amortization Type
 - Adjustable Type

Note

In the **Adjustable Type** drop-down, if you select an option other than Fixed Rate, the following fields are enabled:

- * Interest Rate Code
- * Adjustable-Rate Attributes:
 - * Repricing Frequency
 - * Repricing Frequency Type
 - * Rate Change Rounding Type
 - * Net Margin

- Interest Rate Code
- Net Rate
- Original Term
- Original Term Type
- Payment Attributes:
 - Payment Frequency
 - Payment Frequency Type
 - Accrual Basis
 - Interest Type
 - Compounding Basis
 - Holiday Calendar
 - Holiday Rolling Convention
 - Holiday Calc Option
 - Remaining Number of Payments

Note

In the **Holiday Calendar** drop-down, if you select an option other than **None**, the following fields are enabled:

- * Holiday Rolling Convention
- * Holiday Calc Option

- Adjustable-Rate Attributes:
 - Repricing Frequency
 - Repricing Frequency Type
 - Rate Change Rounding Type
 - Net Margin

Click **Save** to save changes or **Cancel** to discard updates.

Reconciliation using Batch Process

You can perform Reconciliation using the Scheduler Services. The steps below use the GL RECON component, which does not require a Service URL selection.

To run the Reconciliation using Batch Process, follow these steps:

1. With the Define Batch feature, it is possible to create new batches and review existing ones. Navigate to the Scheduler Service and click **Define Batch**.
2. Click + to create a new batch.
3. In the **Create Batch** screen, enter the following values:
 - a. Code (spaces are not allowed in the code section).
 - b. Batch Name
 - c. Click **Save**.

Note

The **Service Url Name** field in the **Create Batch** screen does not require a selection when using the GL RECON component. Leave it blank.

4. In the **Define Task** screen, you can define the tasks related to a specific batch.
 - a. Navigate to **Define Task**.
 - b. Select the name of the batch that has been created for this task.
5. Click + to create a new task.
6. In the **Create Task** screen, enter the following values:
 - a. Task Code (Spaces are not allowed in the code section).
 - b. Task Name.
 - c. Select the task type as **REST**.
 - d. Select the Component as **GL RECON**.
 - e. Click **Save**.

Note

When the **GL RECON** component is selected, the **Batch Service URL** field is not displayed and does not require configuration.

Figure 5-19 Define Task

7. In the **Task Parameter** section, enter the following values:
 - a. **Process Name** — Select the Reconciliation Definition for which the batch should be executed. Ensure you select the correct definition to avoid errors in the batch process.
 - b. **Threshold** — Enter a numeric threshold value.

Note

The value must be greater than or equal to zero (0). Negative values are not supported. A null (blank) value is also accepted, in which case all data will be inserted into the Ledger Instrument and Reconciliation Difference Audit tables.

- c. **Insert Type** — Select one of the following options from the dropdown:
 - **Insert only** — Appends reconciliation data on top of any existing data for the concerned AS_OF_DATE/MIS_DATE. Use this option when different Reconciliation Definitions are being executed for different instrument tables.
 - **Truncate And Insert** — Truncates all existing data for the concerned AS_OF_DATE/MIS_DATE and inserts fresh reconciliation data. Use this option when intermediate day runs have taken place and a final global run is required.

Figure 5-20 Task Parameter

8. Schedule the batch using the **Schedule Batch** screen.
 - a. Navigate to **Schedule Batch**.
 - b. Select the **Name** of the batch created in Step 1.
 - c. Use the **Edit Parameters** option to review the batch parameters and make any necessary adjustments before execution.
 - d. Verify the following before executing:
 - **MIS Date** — The MIS Date is used as the As-of-Date in the Reconciliation UI. Select the appropriate MIS Date.
 - Confirm that the **Process Name** and **Threshold** values entered in Step 7 are correct for the target environment.
 - e. Click **Execute** to run the batch, or click Save to save the batch definition without running it.
 - Clicking **Save** saves the batch definition without executing the batch.
 - Clicking **Execute** submits the batch for execution. An Execute Status dialog is displayed confirming the batch has been submitted.
9. Monitor the Batch:
 - a. Navigate to **Monitor Batch**.
 - b. Select the batch name and MIS Date, then check the Batch Status.
 - c. After the batch completes successfully, navigate to the Balance Reconciliation module to verify the results in the GL Recon Audit report.

Sometimes a batch may fail. The reason for batch failure could be one of the following:

- Selecting an incorrect or invalid **Process Name** (Reconciliation Definition).
- Entering an invalid Threshold value. Only null or a value ≥ 0 are supported. Negative values are not permitted.
- Not selecting an **Insert Type** — this field is mandatory.

Note

The following role mappings to the SKU User group must be present to enable GL RECON listing and execution:

- RCMDREAD
- RCMDADVND

For detailed instructions for defining, executing, and monitoring a Batch, see the [Scheduler Service](#) documentation.

Data Housekeeping

The Data Housekeeping UI helps you to perform the followings tasks based on user defined criteria:

- Delete data from selected tables
- Drop partitions and truncate subpartitions from selected tables

- Archive the data from selected tables

You can use this as data retention in PBSM cloud services.

To open the Data Housekeeping screen, from the LHS menu, select **Data Management Tool**, and then select **Data Housekeeping**.

Users and Roles

The following roles and functions are required to use the Data Housekeeping UI.

Table 5-2 Roles and Role Names

Role Code	Role Name	Function Code	Function Name
RLDHKANALYST	Data Housekeeping Analyst Role	DHKADD	Create Data Housekeeping Policy
		DHKRUN	Run Data Housekeeping Policy
		DHKDEL	Delete Data Housekeeping Policy
		DHKEDIT	Edit Data Housekeeping Policy
		DHKVIEW	View Data Housekeeping Policy
		DHKLOG	View Data Housekeeping Policy execution log
RLDHKAUTH	Data Housekeeping Authorizer Role	DHKAUTH	Authorize Data Housekeeping Policy
		DHKADD	Create Data Housekeeping Policy
		DHKRUN	Run Data Housekeeping Policy
		DHK	Delete Data Housekeeping Policy
		DHKEDIT	Edit Data Housekeeping Policy
		DHKVIEW	View Data Housekeeping Policy
RLDHKAUDIT	Data Housekeeping Auditor Role	DHKLOG	View Data Housekeeping Policy execution log
		DHKVIEW	View Data Housekeeping Policy

Data Housekeeping Summary

Search Policy

Prerequisites: Predefined Policy

To search for a Policy:

1. You can search a policy is through the **Search** drop-down option. Select **Policy Name**, **Policy Type**, **Seeded Policy Flag**, **Last Execution Status**, and **Created By** from **Search** drop-down.
2. Enter the **Policy Name**, **Policy Type**, **Seeded Policy Flag**, **Last Execution Status**, and **Created By** in Search Criteria and click **Go**.

Rows that contain the string you are searching for are fetched and displayed in the Data Housekeeping Summary.

The Data Housekeeping Summary displays the following information:

New Policy: Click the New Policy icon on the page header to build a new policy.

- **Policy Name:** The policy name.
- **Schedule:** Shows the time when the policy is scheduled.
- **Type:** The Type (Archive, Drop Partition, Delete) of the policy.
- **Seeded Policy Flag:** Shows the type of policy as **Yes** if the policy is seeded.
- **Last Run Date:** The Date and Time when the policy was last modified.
- **Created Date:** the date when policy was created.
- **Last Execution Status:** The status of policy after execution.
- **Actions:** Click this icon to view a list of actions that you can perform on the Policy.
 - **View:** View existing policy.
 - **Edit:** Edit existing policy. To edit a rule, you must have Read/Write privilege.
 - **Authorize:** Select Authorize to approve the policy for execution.
 - **Withdraw Jobs:** Select Withdraw Jobs to cancel the Job execution.
 - **View Log:** Select View Log to view the audit information of the policy. This information includes pending and running jobs.
 - **Delete:** You can delete policies that you no longer require. Note that only policy owners and those with Read/Write privileges can delete Policies. A policy that has a dependency cannot be deleted. A policy cannot be retrieved after deletion.
 - **Job Execution Details:** Shows the execution details of selected policy.

Create Data Housekeeping Policy

To create a new Data Housekeeping policy, follow these steps:

1. Navigate to the **Data Housekeeping Summary** Page.
2. Click the **New Policy** icon. The **Create Data Housekeeping** Page is displayed.
3. Click **Start** to create a new policy.
4. Enter the required details and Submit.

Below are the supported Policy Types:

- [Create Drop-Partition Policy](#)
- [Create Archive Policy](#)
- [Create Delete Policy](#)
- [Create Nullify Policy](#)

Create Drop Partition Policy

This section provides the details on dropping the partition data from selected tables based on user defined criteria.

To create Drop Partition Policy, follow these steps:

1. Navigate to **New Policy** page.
2. Follow the steps mentioned in below sections:
 - a. **Step 1:** Policy Definition
 - b. **Step 2:** Selection
 - c. **Step 2:** Preview and Submit

Step 1: Policy Definition section

1. From **Policy Details** tab, click **Start**. The **Policy Definition** page is displayed.

Figure 5-21 Policy Definition section

The screenshot shows the 'Policy Definition' section of the Oracle Profitability Analytics Cloud Service User Guide. The form is titled 'Policy Definition' and includes the following fields and options:

- Policy Name:** A text input field with a 'Required' label below it.
- Table Group:** A dropdown menu with 'No' selected and a 'Required' label below it.
- Policy Description:** A text area with a 'Required' label below it.
- Policy Type:** A dropdown menu with 'Drop Partition' selected and a 'Required' label below it. Other options include 'Archive', 'Delete', and 'Nullify'.
- Policy Execution Date:** A date picker field with a 'Required' label below it.

At the bottom of the form, there are three buttons: 'Cancel', 'Clear', and 'Continue'. On the right side of the form, there is a sidebar with a 'Policy Definition' tab and a 'Review and Submit' button.

2. Enter the following details:
 - **Name:** Name of Policy
 - **Description:** Description of Policy
 - **Table Group:** If this option is selected as **No**, then you can select **Policy Type** as **Drop Partition**.
 - **Type:** Type of Policy as Drop Partition
 - **Policy Execution Date:** Select the execution date and time of policy using calendar
3. Click **Continue**.

Step 2: Selection section

1. Navigate to the **Selection** section. The **Selection** window is displayed to define the partitions.

2. Select the **Partition type** as **Drop Partition** or **Truncate Subpartition**.
 - a. If **Partition type** is selected as **Drop Partition**, then following window is displayed:

Figure 5-22 Partition type as Drop Partition

The screenshot shows the 'Policy Steps' window with the 'Selection' tab active. It displays policy details for 'droppartition' and allows selecting a partitioning type. The 'Drop Partition' option is selected. Below, a table named 'FSI_O_CFE_ACCOUNT_OUTPUT_HIST' is chosen, and a specific partition 'P_FSI_O_CFE_ACCOUNT_OUTPUT_HIST - 1' is selected. A 'Partition Details' table shows the selected table and partition with a high value of 1. At the bottom are 'Cancel', 'Clear', and 'Save' buttons.

Policy Steps

Selection

Define the detailed policy steps to execute

Policy Name	Policy Description	Policy Type	Policy Execution Date
droppartition	droppartition	DROP	04/22/2025 16:15 ASIA/CALCUTTA IST

Select

Choose partitioning type

☒ Drop Partition
 ☐ Truncate SubPartition

Table Name
FSI_O_CFE_ACCOUNT_OUTPUT_HIST

Partition Name
P_FSI_O_CFE_ACCOUNT_OUTPUT_HIST - 1

Partition Details

Table Name	Partition Name	Partition High Value
FSI_O_CFE_ACCOUNT_OUTPUT_HIST	P_FSI_O_CFE_ACCOUNT_OUTPUT_HIST	1

1 - 1 of 1

Cancel Clear Save

- b. Select the table(s) for which you want to do the partitions. The list of available partitions is displayed that contain data.
- c. Select the **Partition Name**. Partition Name shows the partition of the selected table from the database.
The Partition details will be displayed in **Partition Details** section. This shows the Table Name, Partition Name, column name and metadata on which partition is created. This doesn't show empty partitions.
- d. Click **Continue**.
 - a. If **Partition type** is selected as **Truncate Subpartition**, then following window is displayed:

Figure 5-23 Partition type as Truncate Subpartition

Policy Steps

Selection

Define the detailed policy steps to execute

Policy Name	Policy Description	Policy Type	Policy Execution Date
droppartition	droppartition	DROP	04/22/2025 16:15 ASIA/CALCUTTA IST

Select

Choose partitioning type

☐ Drop Partition ☒ Truncate SubPartition

Table Name
STG_ASSET

Partition Name
SYS_P3493 - 04/01/2015

Sub Partition Name
SYS_SUBP3492 - 'SYSTEM'

Subpartition Details

Table Name	Partition Name	Partition High Value	Subpartition Name	Subpart High Value
STG_ASSET	SYS_P3493	TO_DATE(' 2015-04-01 00:00:00', 'YYYY-MM-DD HH24:MI:SS', 'NLS_CALENDAR=GREGORIAN')	SYS_SUBP3492	'SYST

1 - 1 of 1

Cancel Clear Save

- b. Select the table(s) for which you want to do the sub partitions. The list of available sub partitions is displayed that contain data.
- c. Select the **Sub Partition** Name. Sub Partition Name shows the columns and metadata on which sub-partition has been created.
The Sub Partition details will be displayed in **Subpartition Details** section. This shows the Table Name, Subpartition Name, column name and metadata on which partition is created. This doesn't show empty partitions.
- d. Click **Continue**.

Note

If only sub-partition is selected to remove then only data from it will be deleted. Sub-partition is not dropped to enable customer re-load data in it, if needed. Sub-partitions in PBSM data model is created with a pre-defined list.

3. Click **Save**.
4. Click **Continue**.

Step 3: Preview and Submit section

1. Navigate to **Preview and Submit** section. Review the policy details.

Figure 5-24 Preview and Submit section

Policy Steps

Review and Submit

Confirm all details before submitting

Policy Name	Policy Description	Policy Type	Table Group	Policy Execution Date
droppartition	droppartition	DROP	No	04/22/2025 16:15 ASIA/CALCUTTA IST

Partition / Sub-partition Details

STG_ASSET SAVED

Partition Name
SYS_P3493
Sub Partition Name
SYS_SUBP3492

Cancel Discard Submit

3 | 3

- Policy Definition ☒
- Selection ☒
- Review and Submit ☒

- Click **Submit** to create the policy. The created policy will be displayed on **Data Housekeeping Summary** page.

Create Archive Policy

This section provides the details on archiving the data from selected tables based on user defined criteria.

To create Archive Policy, follow these steps:

- Navigate to **New Policy** page.
- Follow the steps mentioned in below sections:
 - Step 1:** Policy Definition
 - Step 2:** Condition
 - Step 3:** Preview and Submit

Step 1: Policy Definition section

- From **Policy Details** tab, click **Start**. The **Policy Definition** page is displayed.

Figure 5-25 Policy Definition section

Policy Definition
Choose a policy name, supply a description, Action, and set a scheduled date

Policy Name
archive1
Required

Table Group
No
Required

Policy Description
archive1
Required

Policy Type
☐ Drop Partition ☒ Archive ☐ Delete ☐ Nullify

Select Table
FCT_BI_EOD_MGMT_LINE_ITEMS
Required

Policy Execution Date
04/23/2025 19:15
Policy Execution Date must have some value.

Cancel Clear Continue

Policy Definition
Review and Submit

2. Enter the following details:

- **Name:** Name of Policy
- **Description:** Description of Policy
- **Table Group:** If this option is selected as **No**, then you can select **Policy Type** as **Drop Partition**.
- **Type:** Type of Policy as Archive
- **Policy Execution Date:** Select the execution date and time of policy using calendar

Step 3: Conditions

This section allows you to define the conditions(s) to archive the table.

1. Navigate to the **Conditions** section.

Figure 5-26 Conditions section

Policy Steps

Conditions

Define the detailed policy steps to execute

Policy Details

Policy Name	Policy Description	Policy Type	Table Group	Policy Execution Date
archive1	archive1	ARCHIVE	No	04/23/2025 19:15 ASIA/CALCUTTA IST

Select Columns

Select Table
FCT_BI_EOD_MGMT_LINE_ITEMS

Choose Filters

Filter Column ▼ Clause Name ▼

	Filter Column	Clause Name	Text Value	Date Value	Number Value
≡	DAY_SK	equals			2

1 rows selected Total 1

Cancel Discard

Policy Definition ☒

Condition

Review and Submit

2. Select the column(s) using **Filter Column**.
3. Select operator from **Clause Name** drop-down. The list of operators displays based on the selected Column Name.

Note

You must select at least one condition to avoid the full table archive. Use AND if you want to use multiple columns. You can select columns from pre-defined list. Don't use wild card characters. Supported operators are: >, <, <=, and >=.

4. Enter condition value for selected column.
For example, If you have selected **Column** as **Account Number**, then select **Equals** operator from **Clause Name** drop-down, and enter alphanumeric value in **Value** field.
Click **Row Actions** icon to view single row, add a new row, create duplicate row, delete row, refresh row, or revert changes.
To add more conditions, define the condition and click **Save**.
5. Click **Continue**.

Step 3: Preview and Submit section

1. Navigate to **Preview and Submit** section. Review the policy details.

Figure 5-27 Preview and Submit section

Policy Steps

Review and Submit

Confirm all details before submitting

Policy Name	Policy Description	Policy Type	Table Group	Policy Execution Date
archive1	archive1	ARCHIVE	No	04/23/2025 19:15 ASIA/CALCUTTA IST

Condition Details

FCT_BI_EOD_MGMT_LINE_ITEMS

Current status: SAVED

Where clause
DAY_SK = 2

Affected Rows 0

Cancel Discard Submit

3 | 3

- Policy Definition ✓
- Condition ✓
- Review and Submit

- Click **Submit** to create the policy. The created policy will be displayed on **Data Housekeeping Summary** page.

Note

Data that is archived remains in the same table but is invisible to user. Thus, they cannot be inserted back as it will violate unique constraint of concerned table.

Create Delete Policy

This section provides the details on deleting the data from selected tables based on user defined criteria.

To create Delete Policy, follow these steps:

- Navigate to **New Policy** page.
- Follow the steps mentioned in below sections:
 - Step 1:** Policy Definition
 - Step 2:** Condition
 - Step 3:** Preview and Submit

Step 1: Policy Definition section

- From **Policy Details** tab, click **Start**. The **Policy Definition** page is displayed.

Figure 5-28 Policy Definition section

Policy Steps

Policy Definition

Choose a policy name, supply a description, Action, and set a scheduled date

Policy Name: deletepolicy Required

Table Group: No Required

Policy Description: deletepolicy

Policy Type: Drop Partition, Archive, Delete, Nullify Required

Select Table: FCT_BI_EOD_MGMT_LINE_ITEMS

Policy Execution Date Required

Cancel Clear Continue

1 | 2

Policy Definition

Review and Submit

2. Enter the following details:

- **Name:** Name of Policy
- **Description:** Description of Policy
- **Table Group:** If this option is selected as **No**, then you can select **Policy Type** as **Drop Partition**.
- **Type:** Type of Policy as **Delete**
- **Policy Execution Date:** Select the execution date and time of policy using calendar

Step 2: Conditions

This section allows you to define the conditions(s) to Delete the table.

1. Navigate to the **Conditions** section.

Figure 5-29 Conditions section

Policy Steps

Conditions

Define the detailed policy steps to execute

Policy Details

Policy Name	Policy Description	Policy Type	Table Group	Policy Execution Date
deletepolicy	deletepolicy	DELETE	No	04/23/2025 11:30 ASIA/KOLKATA IST

Select Columns

Select Table
FCT_BI_EOD_MGMT_LINE_ITEMS

Choose Filters

Filter Column

Clause Name

	Filter Column	Clause Name	Text Value	Date Value	Number Value

1 rows selected Total 1

Cancel Discard Clear Save

Policy Definition

Condition

Review and Submit

2. Select the column(s) using **Filter Column**.
3. Select operator from **Clause Name** drop-down. The list of operators displays based on the selected Column Name.

Note

You must select at least one condition to avoid the full table Delete. Use AND if you want to use multiple columns. You can select columns from pre-defined list. Don't use wild card characters. Supported operators are: >, <, <=, and >=.

4. Enter condition value for selected column.
For example, If you have selected **Column** as **Account Number**, then select **Equals** operator from **Clause Name** drop-down, and enter alphanumeric value in **Value** field.
Click **Row Actions** icon to view single row, add a new row, create duplicate row, delete row, refresh row, or revert changes.

To add more conditions, define the condition and click **Save**.

5. Click **Continue**.

Step 3: Preview and Submit section

1. Navigate to **Preview and Submit** section. Review the policy details.

Figure 5-30 Preview and Submit section

Policy Steps

Review and Submit

Confirm all details before submitting

Policy Name	Policy Description	Policy Type	Table Group	Policy Execution Date
deletepolicy	deletepolicy	DELETE	No	04/23/2025 11:30 ASIA/KOLKATA IST

Condition Details

FCT_BI_EOD_MGMT_LINE_ITEMS

Current status: SAVED

Where clause
DAY_SK = 3

Affected Rows 0

Cancel Discard Submit

3 | 3

- Policy Definition ✓
- Condition ✓
- Review and Submit

- Click **Submit** to create the policy. The created policy will be displayed on **Data Housekeeping Summary** page.

Create Nullify Policy

This section provides the details on nullifying the column from selected tables based on user defined criteria.

To create Nullify Policy, follow these steps:

- Navigate to **New Policy** page.
- Follow the steps mentioned in below sections:
 - Step 1:** Policy Definition
 - Step 2:** Choose Columns
 - Step 3:** Condition
 - Step 4:** Preview and Submit

Step 1: Policy Definition section

- From **Policy Details** tab, click **Start**. The **Policy Definition** page is displayed.

Figure 5-31 Policy Definition section

Policy Steps

Policy Definition

Choose a policy name, supply a description, Action, and set a scheduled date

Policy Name: Required

Table Group: Required

Policy Description:

Policy Type: ☐ Drop Partition ☐ Archive ☐ Delete ☒ Nullify Required

Select Table:

Policy Execution Date: Required

Cancel Clear Continue

1 | 2

Policy Definition

Review and Submit

2. Enter the following details:
 - **Name:** Name of Policy
 - **Description:** Description of Policy
 - **Table Group:** If this option is selected as **No**, then you can select **Policy Type** as **Drop Partition**.
 - **Type:** Type of Policy as Nullify
 - **Policy Execution Date:** Select the execution date and time of policy using calendar

Step 2: Choose Columns section

1. Navigate to the **Choose Columns** section.

Figure 5-32 Choose Columns

Policy Steps

Choose Columns

Choose the columns that you need to nullify

Policy Name	Policy Description	Policy Type	Table Group	Policy Execution Date
Test	Test	NULLIFY	No	04/23/2025 12:00 ASIA/KOLKATA IST

Select Columns

Select Table

FSL_D_ACCOUNT_RATE_TIERS

Select Columns

Add

Remove

Cancel

Discard

Clear

Continue

2 | 4

Policy Definition

Choose Columns

Condition


Review and Submit

- 2. To select the columns which you want to nullify, click

Figure 5-33 Search Columns



in Select Columns field. The Search window is displayed.

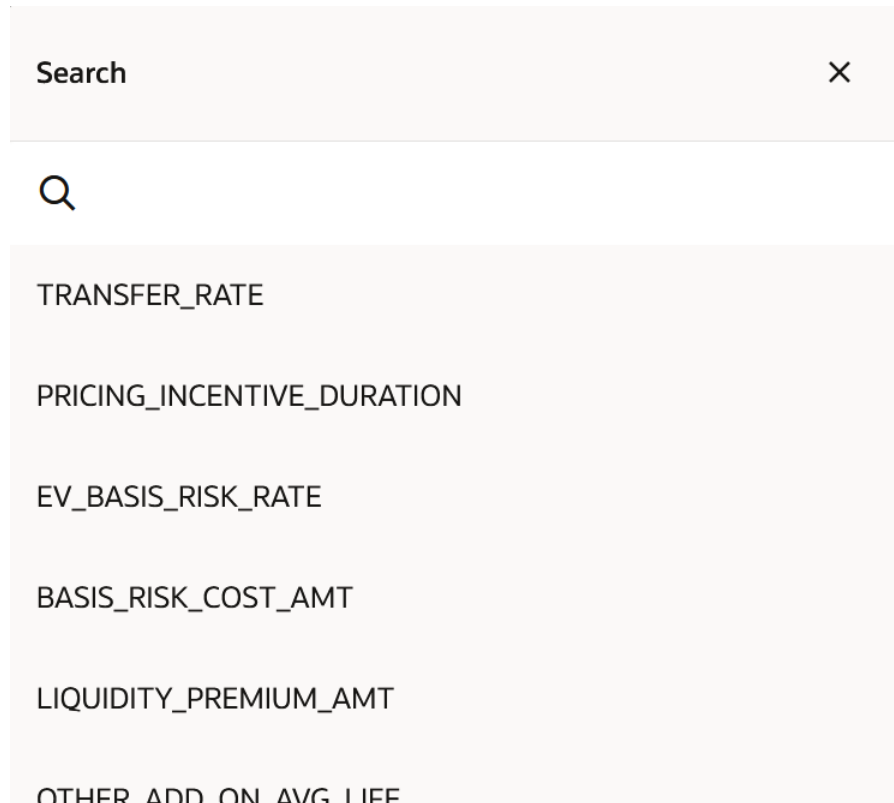Figure 5-34 Search Columns

Search ×

Q

TRANSFER_RATE

PRICING_INCENTIVE_DURATION

EV_BASIS_RISK_RATE

BASIS_RISK_COST_AMT

LIQUIDITY_PREMIUM_AMT

OTHER_ADD_ON_AVG_LIFE

3. Select columns and click **Add**.
4. Click **Continue**.

Step 3: Conditions

This section allows you to define the conditions(s) to archive the table.

1. Navigate to the **Conditions** section.

Figure 5-35 Conditions section

Policy Steps

Conditions

Define the detailed policy steps to execute

Policy Details

Policy Name	Policy Description	Policy Type	Table Group	Policy Execution Date
Test	Test	NULLIFY	No	04/23/2025 12:00 ASIA/KOLKATA IST

Select Columns

Select Table
FSI_D_ACCOUNT_RATE_TIERS

Choose Filters

Filter Column

Clause Name

	Filter Column	Clause Name	Text Value	Date Value	Number Value

1 rows selected Total 1

Cancel
 Discard
Clear
Save

2. Select the column(s) using **Filter Column**.
3. Select operator from **Clause Name** drop-down. The list of operators displays based on the selected Column Name.

Note

You must select at least one condition to avoid the full table archive. Use AND if you want to use multiple columns. You can select columns from pre-defined list. Don't use wild card characters. Supported operators are: >, <, <=, and >=.

4. Enter condition value for selected column.
For example, If you have selected **Column** as **Account Number**, then select **Equals** operator from **Clause Name** drop-down, and enter alphanumeric value in **Value** field.
Click **Row Actions** icon to view single row, add a new row, create duplicate row, delete row, refresh row, or revert changes.

To add more conditions, define the condition and click **Save**.

5. Click **Continue**.

Step 4: Preview and Submit section

1. Navigate to **Preview and Submit** section. Review the policy details.

Figure 5-36 Preview and Submit section

Policy Steps

Review and Submit

Confirm all details before submitting

Policy Name	Policy Description	Policy Type	Table Group	Policy Execution Date
Test	Test	NULLIFY	No	04/23/2025 12:00 ASIA/KOLKATA IST

Update Details

FSI_D_ACCOUNT_RATE_TIERS

Current status: SAVED Record Count: 0

Columns set to null
TRANSFER_RATE = null

Where clause
AS_OF_DATE > '02-APR-25'

Cancel Discard Submit

4 | 4

- Policy Definition ✓
- Choose Columns ✓
- Condition ✓
- Review and Submit

- Click **Submit** to create the policy. The created policy will be displayed on **Data Housekeeping Summary** page.

Note

Data that is archived remains in the same table but is invisible to user. Thus, they cannot be inserted back as it will violate unique constraint of concerned table.

Authorize a Policy

To authorize a policy, follow these steps:

Predefined Data Housekeeping Policy

- Navigate to the **Data Housekeeping Summary** page
- Search for a policy that you want to authorize. For further information, see the [Data Housekeeping Summary](#) section
- Click on the **Action** icon against the policy name and select **Authorize**.

Figure 5-37 Authorize Policy

Review and Approve

Confirm all details before approving

Back

Reject

Approve

Policy Name

Policy Description

Policy Type

Policy Execution Date

Policy-001

ARCHIVE

04/22/2025 15:15 ASIA/KOLKATA IST

Archive Summary

Q

Actions

Table Name	Policy Name	Records Count	Archive Status	Where Clause	User Created By
FCT_BI_EOD_MGMT_LINE_ITEMS	Policy-001	0	SUBMITTED	DAY_SK = 1	ALMUSER

1 - 1

- 4. Click **Approve**.
- 5. Enter Policy comments and click **OK**.

Figure 5-38 Policy Comments

Policy Comments

OK

Data Housekeeping policy gets executed on scheduled date and time after authorization. It runs automatically at the defined date and time which was set during the policy creation.

Withdraw a Policy

Note

Policies can be withdrawn if there is more than 15 minutes left in the scheduled time.


To withdraw a policy, follow these steps:

Predefined and approved Data Housekeeping Policy

1. Navigate to the **Data Housekeeping Summary** page
2. Search for a policy that you want to authorize. For further information, see the [Data Housekeeping Summary](#) section
3. Click on the **Action** icon against the policy name and select **Withdraw Jobs**.

A confirmation box is displayed. Click OK.

Figure 5-39 Withdraw Jobs

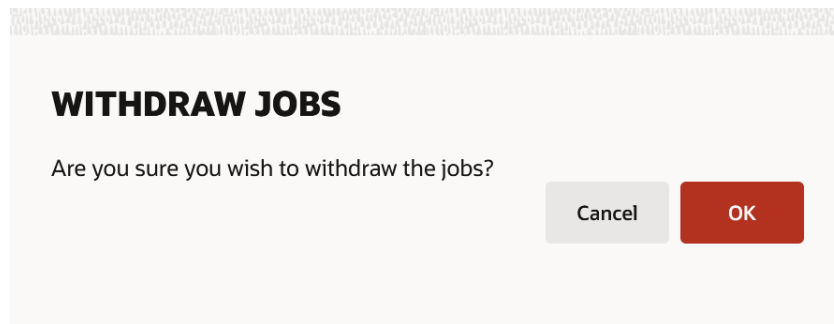

Data Level Security

This topic describes how the data administrators can restrict access to the users to instrument and management ledger tables based on specific dimensions.

A user-friendly UI helps you to enforce this security at the row level.


Data Level Security enables administrators to control access to records by segmenting them based on specific dimensions. By default, users who are not included in the data level security mapping can view all available records in corresponding instrument and management ledger tables. However, once a visibility mapping is applied, users are limited to records that match their assigned values.

This feature ensures that users can only access data relevant to their assigned dimensions, enhancing both security and data management.

To implement Data Level Security:

1. From the LHS menu, select **Data Management Tools**, and then select **Data Level Security**.

Figure 5-40 Data Level Security

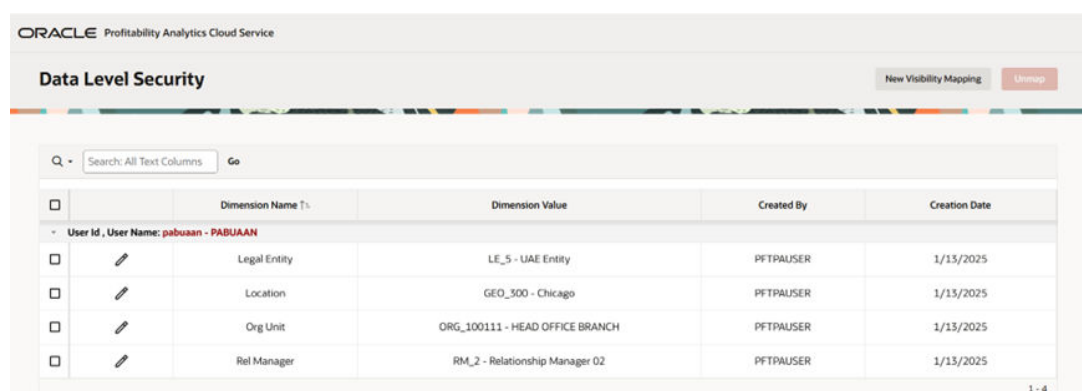

The Data Level Security window opens in another tab and displays the following existing details:

- Dimension Name: The Dimension Name selected by the user for restriction.
 - Dimension Value: The Dimension Value.
 - Created By: The user who create the rule.
 - Creation Date: The day on which the rule is created.
2. You can select a row from the summary screen and click **Unmap** to remove the assigned restrictions.
 3. Click **New Visibility Mapping** if you want to create a new mapping rule. The Add Mapping window is displayed.

Figure 5-41 Add Mapping

The screenshot shows the 'Add Mapping' window. It has a title bar with the text 'Add Mapping' and a close button 'X'. Below the title bar, there are five dropdown menus stacked vertically. The first dropdown is labeled 'User ID, Username' and has a 'Required' label below it. The other four dropdowns are labeled 'Legal Entity', 'Org Unit', 'Rel Manager', and 'Location'. At the bottom right of the window, there are two buttons: 'Cancel' and 'Map'.

4. Select the following details:
 - User ID, Username: The user for which you want to add the restrictions.
 - Select the relevant values for the following:
 - Legal Entity
 - Org Unit
 - Rel Manager
 - Location
5. Click **Map**. The new mapping details will be saved and displayed on the summary screen. Once the user logs out and logs in, he/she can only the records containing the assigned values.
6. You can select the **Edit** icon for a particular row to change the existing restrictions. An Edit Mapping screen is displayed.

Figure 5-42 Edit Mapping

7. Change the relevant details and click **Map**. You can change the dimensions Legal Entity, Organization Unit, Relationship Manager, and Location. The changed mapping details will be saved and displayed on the summary screen. Once the user logs out and logs in, he/she can only the records containing the assigned values.

Data Redaction

PBSMCS is enhanced to enable masking of sensitive data and Personal Identification Information (PII) to adhere to Regulations and Privacy Policies.

Oracle Data Redaction provides selective, on-the-fly redaction of sensitive data in database query results prior to display by applications so that unauthorized users cannot view the sensitive data.

The stored data remains unaltered, while displayed data is transformed to a pattern that does not contain any identifiable information.

Note

Redaction is supported only on Oracle database.

Redaction Functions

Use functions to define the type of redaction to be applied.

To define a redaction function:

1. Click **Data Management Tools > Redaction Framework** and select **Redaction Functions**. The **Redaction Functions Summary** screen appears.
2. Click **Add** and provide the following details:

3. **Redact Function Name:** Specify a name for the function. Example: Email_ID.
4. **Description:** Provide a description for the function. Example: Function to redact email IDs.
5. **Redact Type:** Select the redaction type to be applied.
 - **Full:** You can redact all of the contents of the column data. The redacted value returned to the querying application user depends on the data type of the column. For example, columns of the NUMBER data type are redacted with a zero (0), and character data types are redacted with a single space.
 - **Partial Trailing:** You can hide or obscure a part of the data at the end of a column value. For example, you can redact a Social Security number with asterisks (*), except for the initial 4 digits.

Note

Only VARCHAR and VARCHAR2 are supported.

- **Partial Leading:** You can hide or obscure a part of the data at the beginning of a column value. For example, you can redact a Social Security number with asterisks (*), except for the last 4 digits.

Note

Only VARCHAR and VARCHAR2 are supported.

- **No of characters:** (Available only if partial redaction is applied). Specify the number of characters to be redacted.

Note

You can't apply partial redaction to date type columns. Only full redaction is applicable to date type columns.

6. Click **Apply**.

Redaction Policies

You can use policies to map redaction functions to classification codes.

A classification code is a logical abstraction for a table column. Example: Social Security Number. These codes are pre-seeded.

By mapping classification codes to redaction functions, you can redact the underlying table column.

View redaction policies

You can view the defined redaction policies using the Redaction Policies Summary screen.

To view the redaction policies:

1. Click **Data Management Tools > Redaction Framework** and select **Redaction Policies**.

The **Redaction Policies Summary** screen appears.

2. Enter the text of the second step here.

See the table below for fields and their description.

Table 5-3 Redaction Policies Summary

Field	Description
Classification Name	Pre-seeded classification code name.
Redact Functions	Redact function name
Version	The latest version of the classification.
Request Type	Types of request: • Refresh: Map redaction as per latest addition of table columns. • Unmap: Remove redaction. • Map: Apply redaction
Status	Policy status
Policy Applied On	Date on which the policy was applied.
Created By	The user who created the policy.
Created Date	Date of creation of the policy.
Actions	You can perform the following actions: a. Edit b. Drop c. Refresh d. View

3. Click the **Actions** menu corresponding to the policy you want to view and select **View**.

The Redaction Policies Preview screen appears containing details of the policy.

Create redaction policies

Perform the following steps to create a redaction policy:

1. Click **Data Management Tools > Redaction Framework** and select **Redaction Policies**.
The **Redaction Policies Summary** screen appears.
2. Click **Add**.
3. Select the classification from the **Classification Name** drop-down list.

Note

Data redaction can be configured for extended or custom columns only if the columns are created using the Data Model Extension (DME) module. After extension, such columns are available for selection in the Redaction Policies screen.

However, the Classification field supports only the predefined values provided by the application. Customization or extension of classification values for additional sensitive data types is not currently supported.

4. Select the function to be mapped to the classification name, from the **Redact Function Name** drop-down list.
5. Click **Map**.
The affected table and columns are displayed as a result of this mapping.
6. Click **Submit for Approval** or click **Reject** to cancel the mapping.

Modify a redaction policy

Perform the following steps to modify a redaction policy.

1. Click **Data Management Tools > Redaction Framework** and select **Redaction Policies**.
The **Redaction Policies Summary** screen appears.
2. Click the **Actions** menu corresponding to the policy you want to modify and select **Edit**.
3. Select the required function from the **Redact Function Name** drop-down list.
4. Click **Update Map**.
The screen displays the affected table and columns as a result of this modification.
5. Verify the details and click **Submit for Approval**.

Drop a redaction policy

Perform the following steps to drop a redaction policy.

1. Click **Data Management Tools > Redaction Framework** and select **Redaction Policies**.
The **Redaction Policies Summary** screen appears.
2. Click the **Actions** menu corresponding to the policy you want to drop and select **Drop**.
The screen displays the affected table and columns as a result of this drop action.
3. Verify the details and click **Submit for Approval**.

Refresh a redaction policy

Use the Refresh feature to extend redaction to newly added columns within an existing policy, preserving previous redactions.

To refresh a redaction policy:

1. Click **Data Management Tools > Redaction Framework** and select **Redaction Policies**.
The **Redaction Policies Summary** screen appears.
2. Click the **Actions** menu corresponding to the policy you want to refresh and select **Refresh**.
The **Refresh Dialog** appears.
3. Click **Run Refresh**.

Redaction Approval

You can approve or reject the redaction policies, using the Redaction Policies Authorization screen.

You must have the REDACT_AUTH role to approve/reject the policies.

Perform the following steps:

1. Click **Data Management Tools > Redaction Framework** and select **Redaction Approval**. The **Redaction Policies Authorization Summary** screen appears listing the policies awaiting approval/rejection.
2. Click the **Actions** menu corresponding to the policy you want to approve/reject. The screen displays the affected tables and columns as a result of approving/rejecting this policy.
3. Verify the details and click **Approve & Execute** to approve the policy. Or, click **Reject** to cancel the policy.
4. Depending on the selection, provide the Approver Comments/Rejected Comments and click the **Approve & Execute/Reject** button once again to complete the action.

Data Retention

Data Retention enables you to view policies that manage data lifecycle by archiving or deleting data based on retention criteria, and to monitor execution history. Retention policies visible on screen depends on the type of environment - Production, Non-Production - as different policies apply to them.

To access Data Retention, from the LHS menu, navigate to:

- **Admin Tools > Data Retention > Data Retention Policy**
- **Admin Tools > Data Retention > Data Retention Execution History**

Roles and Access

The following roles and access are required to use the Data Retention UI.

Table 5-4 Roles and Access

Role Code	Description
CLEANUP_ADMIN	Provides access to execute and monitor data retention policies
CLEANUP_VIEWER	Provides read-only access to view policies and execution history

Data Retention Policy

The **Data Retention Policy** screen displays predefined retention policies available in the system.

Note

Users cannot create or modify policies. Policies are system-defined and vary based on the environment (Production and Non-Production).

Figure 5-43 Data Retention Policy Screen

Table Name	Snapshot Type	Operation	Retention Period	Archive Duration
DIM_CS_INST_GEO_MAPPING	End of Month	Archive	36 Months	48 Months
DIM_CS_INST_GEO_MAPPING	Daily	Delete	30 Days	
DIM_CS_SEGMENTATION	End of Month	Archive	36 Months	48 Months
DIM_CS_SEGMENTATION	Daily	Delete	30 Days	
FCT_BI_EOD_MGMT_LINE_ITEMS	End of Month	Archive	36 Months	48 Months
FCT_BI_EOD_MGMT_LINE_ITEMS	Daily	Delete	30 Days	
FCT_BI_EOD_MGMT_METRICS	End of Month	Archive	36 Months	48 Months

The screen displays the following attributes:

- Table Name
- Snapshot Type (for example, Daily, End of Month)
- Operation (Archive or Delete)
- Retention Period
- Archive Duration

The Data Retention Policy Screen includes the following Key Actions:

- **Next Cleanup Preview:** Displays a preview of upcoming cleanup operations based on defined policies.
- **Refresh:** Reloads the data on the screen.
- **Reset:** Clears applied filters and restores default view.

Executing Data Retention via Scheduler Service

Data retention policies are executed through the Scheduler Service.

To execute data retention through scheduler:

1. Navigate to **Operations and Processes > Scheduler Service**.
2. Click **Batches** and create a new batch (or use an existing batch)
3. Click **Tasks**.
4. Click **Add** to open the **Create Batch** screen.
5. Enter the required Batch Details.
6. Click **Save**.
A confirmation message is displayed:
Batch is saved successfully. Would you like to navigate to Task Screen?
7. Click **Yes** to navigate to the **Define Task** screen.
8. In the **Define Task** screen, click **Add**.

9. In the **Create Task** screen, enter the following details:
 - In the **Task Type** field, select **REST** from the drop-down list.
 - In the **Component** field, select Data Retention Policy from the drop-down list.
10. Verify the Task Parameters:
 - **\$BATCHDATE\$** is auto-populated.
 - **\$BATCHRUNID\$** is auto-populated.
11. Click **Save**.
12. Navigate to **Schedule Batch**.
13. Select the required batch.
14. (Optional) Click **Edit Parameters** and verify the MIS Date.
15. Click **Execute** to run the batch.
16. Navigate to **Monitor Batch**.
17. Select the **Batch Name** and **MIS Date**, and click **Start Monitor**.
18. Verify the execution status
19. To view execution results, navigate to: **Admin Tools > Data Retention > Data Retention Execution History**.
20. Review the execution details such as Batch Run Id, Table Name, Operation, and Status. Click **Download Logs** if required.

Note

- Data Retention policies are predefined and cannot be created or modified by users.
- Policies may differ based on the environment (Production or Non-Production).
- Scheduler execution triggers the predefined policies configured in the system.

Data Retention Execution History

The Data Retention Execution History screen provides details of executed data retention jobs.

Figure 5-44 Data Retention Execution History

Data Retention Cleanup History

Execution Date - Batch Run Id Table Name

2776 items

As of Date	Batch Run Id	Table Name	Operation	Status	Action
01-Jan-2022	Data_Housekeeping_2026-04-13_1	FSI_D_ASSET	Delete	Success	...
02-Jan-2022	Data_Housekeeping_2026-04-13_1	FSI_D_ASSET	Delete	Success	...
03-Jan-2022	Data_Housekeeping_2026-04-13_1	FSI_D_ASSET	Delete	Success	...
04-Jan-2022	Data_Housekeeping_2026-04-13_1	FSI_D_ASSET	Delete	Success	...
05-Jan-2022	Data_Housekeeping_2026-04-13_1	FSI_D_ASSET	Delete	Success	...

The screen displays the following attributes:

- As of Date
- Batch Run Id
- Table Name
- Operation (Delete or Archive)
- Status (for example, Success or Failed)
- Action menu

The Data Retention Execution History Screen includes the following Key Actions:

- **Download Logs:** Downloads execution logs for analysis.
- **Refresh:** Reloads the execution history data.
- **Reset:** Clears applied filters.

Data Retention Features

Data Retention supports the following operations:

- Delete data from selected tables based on retention criteria
- Archive data for long-term storage
- Automatically execute cleanup jobs based on defined policies
- Track execution status and history for audit and monitoring purposes

Actions Performed on Data Retention

To View Data Retention Policies:

1. Navigate to **Admin Tools > Data Retention > Data Retention Policy**. The **Data Retention Policy** screen is displayed.
2. View the list of policies along with Table Name, Snapshot Type, Operation, Retention Period, and Archive Duration.

To Preview Cleanup Activities:

1. Navigate to **Admin Tools > Data Retention > Data Retention Policy**.
2. Click **Next Cleanup Preview**.
The system displays upcoming cleanup operations based on defined policies.

To Refresh or Reset Policy List:

1. Navigate to **Admin Tools > Data Retention > Data Retention Policy**.
2. Do either of the following:
 - Click **Refresh** to reload the data.
 - Click **Reset** to clear filters and restore the default view.

To View Execution History:

1. Navigate to **Admin Tools > Data Retention > Data Retention Execution History**.
The **Data Retention Execution History** screen is displayed.
2. View execution details such as As-of Date, Batch Run Id, Table Name, Operation, and Status.

To Download Execution Logs:

1. Navigate to **Admin Tools > Data Retention > Data Retention Execution History**.
2. Click **Download Logs**.
The system downloads the execution logs for the selected or filtered records.

To Filter Execution History:

1. Navigate to **Admin Tools > Data Retention > Data Retention Execution History**.
2. Use the search bar or filters such as Execution Date, Batch Run Id, and Table Name to refine the results.

Data Foundation Integration

This chapter is applicable if you have subscribed to Data Foundation Cloud Service (DFCS) along with Profitability and Balance Sheet Management Cloud Service (PBSMCS) and you want to bring data into PBSMCS from DFCS. Below topics are covered here:

- **Data Services Subscriptions:** DFCS has pre-built connectors (called Application Data Services or ADS) to supply data to from its database to PBSMCS database. To use this feature the connection between both cloud services must be activated by configuring the required parameters from Data Services Subscriptions UI.
- **ADS Run History:** When the jobs to move data from DFCS to PBSMCS are executed, the progress and information of previous executions can be viewed from ADS Run History UI.

To access the Data Foundation services, from the LHS menu, select **Admin Tools**, select **Data Foundation Integration**, and then select any of the menu options.

For more information on Data Foundation Integration, see [DFCS Integration with PBSMCS for ADS User Guide](#)

User Group for Managing Data Foundation Integration

User must be mapped to below user group to access Data Services Subscriptions, ADS Run History, create Scheduler batches and execute them.

Table 5-5 User Group

USER	ROLE CODE	FUNCTION	Role Name	Role Description
ADMIN	ADS_ADMIN_ROLE	DFBADSSCBR,DFBADSEXEC,DFBADSVW	Application Data Service Administrator	This role helps to Subscribe, Update, View and Execute the Application Data Service
BATCH EXECUTOR	DFBADSEXEC_ROLE	DFBADSEXEC,DFBADSVW	Application Data Service Executor	This role helps to Execute the Application Data Service
BATCH VIEWER	DFBADSVW_ROLE	DFBADSVW	Application Data Service Viewer	This role helps to View the Application Data Service

Note

Unmap DFCS_PBSM_INTEGRATION to any user mapped to application after upgrading to 25C.

The following seeded user groups are available for managing Data Foundation Integration. For fresh 26B tenants, these groups are automatically available in the IDCS console. For upgrade tenants, these groups must be manually mapped from the application console.

Table 5-6 Seeded User Groups for Data Foundation Integration

Group	Description
DFCS_PBSM_ADMIN	PBSM Data Foundation Administrator
DFCS_PBSM_EXEC	PBSM Data Foundation Operator
DFCS_PBSM_VIEW	PBSM Data Foundation Auditor


Data Services Subscription

It is necessary to have the subscription to the Data Foundation Cloud Service to operate.

To fill in subscription details of Data Foundation Services, select **Admin Tools**, select **Data Foundation Integration**, and then select **Data Services Subscriptions**.

The Data Services Subscriptions dashboard is displayed.

Figure 5-45 Data Services Subscriptions dashboard

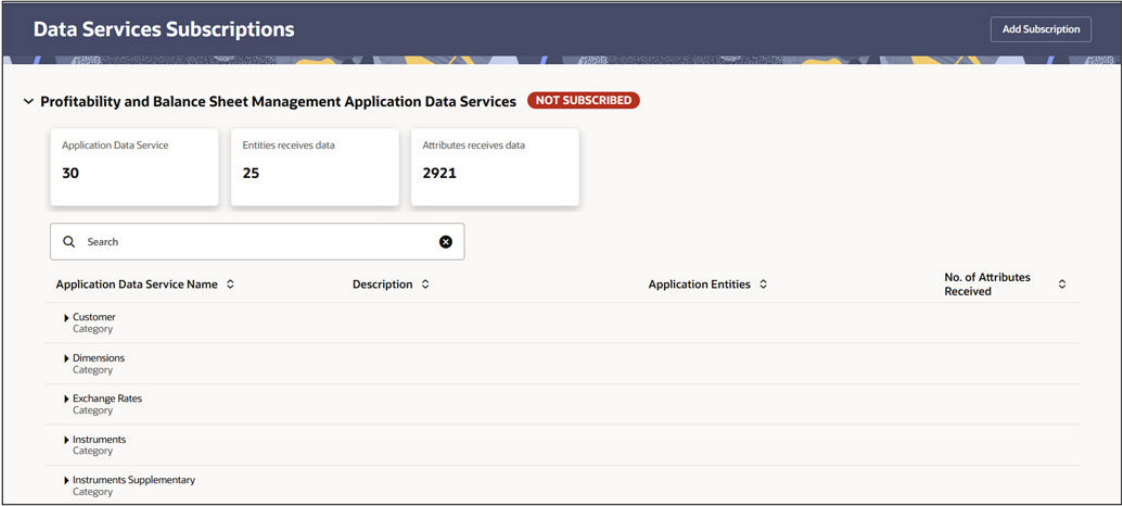

The dashboard displays the following details:

- **Application Data Service:** Displays the total number of ADS or Connectors present.
- **Entities receives data:** The number entities receiving data.
- **Attributes receives data:** The number of attributes receiving data.
- **Publisher:** The Data Foundation Cloud Service tenant name. This option will be available if you have subscribed for Data Service subscription. You can expand each of the Application Data Service Name to see the Name, Description, Application Entities, Number of Attributes received.

Figure 5-46 Data Services Subscriptions top pane

Application Data Service Name	Description	Application Entities	No. of Attributes Received
▼ Customer Category			
Customer Party Hierarchy	Data Service for Customer Party Hierarchy	Staging Customer Hierarchy	11
Customer Master Party Master	Data Service for Customer Master Party Master	Staging Customer	10

Add a Subscription

To add a Subscription, follow these steps:

1. Navigate to Data Services Subscriptions page.
2. Click **Add Subscription** button. The Subscription window is displayed.

Figure 5-47 Subscription window

Subscription - Profitability and Balance Sheet Management Application Data Services

×

Add the required details, perform test connection and subscribe.

☐ Integrated App Migration

IDCS Uri *
https://idcs-67d09dbfffa47c89ddba118fbb5717a.ident

DFCS Uri *
https://devcorp7.ofsaa.us-phoenix-1.ocs.oc-test.com

Client Id *
.....

Client Secret *
.....

DFCS TenantId *
md5n6z-prd

User Id *
.....

Password *
.....

Test Connection

Update Credentials

☒ Additional subscription activities completed.

Submit

Check for Extension

Unsubscribe

 Note

Do not select the **Integrated App Migration** check box when using **Oracle Cloud Services (OPC)** or the **Integrated Application** method during subscription. To identify which method you are using, see the [DFCS Integration with PSMCS for ADS User Guide](#). Once the OPC Integrated App is created, ensure that the **Client ID** and **Client Secret** fields are updated with the credentials generated specifically for that Integrated App. These credentials are unique and will differ from the common Client ID and Client Secret shared among all tenants.

3. Enter the following fields (all fields are mandatory):

Table 5-7 Application Data Service

Field	Description
IDCS URL	The URL of the Identity Cloud Service (IDCS) instance used for authentication. This allows PSMCS to authenticate securely with DFCS.  Note For more information on how to obtain the IDCS URL, see Get the OAuth Client ID and Client Secret section in the chapter.
DFCS URL	The base URL of the Data Foundation Cloud Service (DFCS) instance. It specifies the source environment from which PSMCS will receive data.  Note For more information on how to obtain the IDCS URL, see Get the OAuth Client ID and Client Secret section in the chapter.

Table 5-7 (Cont.) Application Data Service

Field	Description
Client ID	A unique identifier registered in IDCS for the application (PBSMCS). It is used as part of the OAuth2 authentication process when establishing a connection with DFCS. Note When using the OPC Integrated App, the Client ID must be updated with the one generated specifically for that Integrated App. This will be unique and different from the common Client ID shared among all tenants. Note For more information on how to obtain the IDCS URL, see Get the OAuth Client ID and Client Secret section in the chapter.
Client Secret	A confidential key associated with the Client ID. It is used to authorize the PBSMCS application to access DFCS data securely. Note When using the OPC Integrated App, the Client Secret must be updated with the one generated specifically for that Integrated App. This will be unique and different from the common Client Secret shared among all tenants. Note For more information on how to obtain the IDCS URL, see Get the OAuth Client ID and Client Secret section in the chapter.

Table 5-7 (Cont.) Application Data Service

Field	Description
DFCS Tenant ID	The unique identifier for your DFCS tenant environment. It ensures that the connection and data transfer are scoped correctly to your organization's DFCS instance.
	 Note DFCS and PBSMCS must use the same tenant type (-prd or -nprd). Cross-tenant usage is not supported. For example, if DFCS is a production tenant then the subscriber tenant must also be a production tenant.
User ID	The DFCS application user's login ID authorized to access and retrieve data from the DFCS environment. This user must have the appropriate roles and permissions for data publishing.
	 Note The User ID is case-sensitive and must be created in lowercase letters.
Password	The corresponding password for the DFCS User ID. It is used during authentication to validate the user's access when connecting PBSMCS to DFCS.

- After entering the details, click **Test Connection**. If all the details are correct, then the **Subscribe** button will get enabled.

 Note

This checks if the current credentials are working or if there's a connection issue.

- Once the credentials are entered correctly, you can click **Update Credentials** to save your changes.
- If successful, a message *"Operation successfully connected"* appears at the top of the pane, and the **Subscribe** button is enabled.
- If the test fails, recheck and verify the entered details.
- Click **Subscribe**.
- When the subscription starts, a message *"Please Contact Oracle Support to Complete Additional Activities"* will appear.

Note

Subscription completion may take a few minutes.

10. If you've already subscribed, you can unsubscribe from the service or make changes to your subscription, click **Unsubscribe**. The pop-up message informs you that unsubscribing from the **DFCS Tenant** is **permanent** and **cannot be undone**. You have two options:
 - a. **Cancel**: If you change your mind and do not want to unsubscribe, click the **Cancel** button. This will close the prompt and allow you to continue using the service.
 - b. **Yes, Continue**: If you're sure you want to unsubscribe, click the **Yes, Continue** button. This will confirm the action and unsubscribe you from the service permanently.
11. If you have already subscribed to DFCS and are upgrading from 26A to 26B, perform the following additional steps:
 - a. After the subscription is completed, raise a **Service Request (SR)** with the DFCS Tenant details and PBSMCS Tenant details to finalize the additional subscription process. The additional subscription is applicable for the existing subscribed users.

Note

When you are raising the SR for additional subscription process, you must provide the IDCS URL and DFCS URL details in SR details. The SR should be raised under DFCS product

- b. Once the SR is processed and confirmation is received, select the **Additional Subscription Activities Completed** check box to upload the wallet details. After this step, you will be connected to the Data Foundation Cloud Service tenant. For Wallet Upload, contact to Oracle Support.

Note

Following any G2 certification renewal or update of the PBSM tenant, the updated PBSM wallet must be re-uploaded to DFCS. Oracle communicates G2 certificate renewal timelines via official release notes and patch notifications. Customers are advised to monitor Oracle's official release communications or contact Oracle Support to stay informed of upcoming G2 certificate renewals. Failure to upload the updated wallet after a G2 certificate change will result in ADS batch execution failures with an SSL/TLS certificate path error (ORA-17002: PKIX path building failed). To re-upload the wallet after a G2 certificate update, contact Oracle Support and raise an SR under the DFCS product.

12. Click **Submit** to complete the subscription.

After the subscription is successful, in the dashboard, expand the Application Data Service Name and verify if the ADS Pipeline Code is displayed for the services.

Figure 5-48 Data Services Subscriptions top pane

Application Data Service Name	Description	Application Entities	No. of Attributes Received	ADS Pipeline Code
▼ Customer Category				
Customer Party Hierarchy	Data Service for Customer Party Hierarchy	Staging Customer Hierarchy	11	PBSM_ADS_TAXB01_PRD_STG_C...
Customer Master Party Master	Data Service for Customer Master Party Master	Staging Customer	10	PBSM_ADS_TAXB01_PRD_STG_C...

You can expand each of the Application Data Service Name to see the Name, Description, Application Entities, Number of Attributes received, and ADS pipeline code.

Note

ADS pipeline code is displayed only when you have subscribed for DFCS.

Edit a Subscription

If you are already subscribed, then click **Edit Subscription** to edit the User Id and Password. You cannot edit IDCS URL, DFCS URL, Client Id, Client Secret, and DFCS Tenant Id as they are already populated after subscription.

To edit a Subscription, follow these steps:

1. Update the **User ID** and/or **Password** if required.
2. Click **Update Credentials** to save the changes.

For more information, see Add a Subscription.

If you are already subscribed, click **Edit Subscription** to update the User ID and Password. Note that fields such as **IDCS URL**, **DFCS URL**, **Client ID**, **Client Secret**, and **DFCS Tenant ID** cannot be edited, as they are mapped/ created by the admin during the initial subscription.

You can also click **Check for Extension** if extensions have been already published.

You can Unsubscribe an exiting Subscription using the **Unsubscribe** button.

Figure 5-49 Subscription window

Subscription - Profitability and Balance Sheet Management Application Data Services [X]

Add the required details, perform test connection and subscribe.

IDCS Uri *
https://idcs-67d09dbffba47c89ddba118fbb5717a.ident

DFCS Uri *
https://devcorp7.ofsaa.us-phoenix-1.ocs.oc-test.com

Client Id *
.....

Client Secret *
.....

DFCS TenantId *
md5n6z-prd

User Id *
dfctest

Password *
..... [Eye Icon]

[Test Connection] [Update Credentials]

☒ Additional subscription activities completed. [Submit]

[Check for Extension]

[Unsubscribe]

Refresh the Extension from DFCS

After subscribing to Application Data Services (ADS), you may need to apply **extensions** to include additional data elements or custom mappings. The following steps outline how to verify, extend, and execute the required processes.

Check for Extension (PBSMCS - Subscriber)

- After completing the ADS Extension in the DFCS setup, click **Check for Extension**. A confirmation message appears: **Do you want to proceed with the extension?**
- Click **Confirm** to proceed.
- Then click **Submit** to finalize the confirmation.

Refresh ADS

- Click **Extend ADS** to trigger the extension of Application Data Services.

- This updates the existing process specific to the extensions.

ADS Run History

The ADS Run History provides information related to Batches that have been processed to move data from DFCS to PBSM.

Note

For the user to be able to see the ADS History, the user must be mapped to a group that has the required role (RLADSHISTVIEW). Role is not mapped in the OOTB set up.

To open the ADS Run History, from the LHS menu, , select **Admin Tools**, select **Data Foundation Integration**, and then select **ADS Run History**.

The ADS Run History page is displayed.


Figure 5-50 ADS Run History

As Of Date	Batch Run Id	ADS Name	Data Source Code	Status	Records Loaded	Time Taken
4/30/2024	DFCS_PBSM_INSTRUMENTS_LIABILITY_2024-04-30_2	Liability Casa	SRC1	Passed		
4/30/2024	DFCS_PBSM_DIMENSIONS_2024-04-30_31	Dimensions Interface		Passed		
4/30/2024	DFCS_PBSM_INSTRUMENTS_LIABILITY_2024-04-30_2	Liability Term Deposit Contracts	SRC1	Passed		
4/30/2024	DFCS_PBSM_INSTRUMENTS_LIABILITY_2024-04-30_2	Liability Term Deposit Contracts	SRC1	Passed		
4/30/2024	DFCS_PBSM_INSTRUMENTS_LIABILITY_2024-04-30_3	Liability Casa	SRC1	Passed		
4/30/2024	DFCS_PBSM_INSTRUMENTS_LIABILITY_2024-04-30_3	Liability Term Deposit Contracts	SRC1	Passed		
4/30/2024	DFCS_PBSM_INSTRUMENTS_LIABILITY_2024-04-30_1	Liability Casa	SRC1	Failed		

This UI allows you to apply various filters namely, As Of Date, Batch Run Id, ADS Name, and Data Source Code. The default view of ADS Run History displays the mentioned details. You can click **More Filters** which are Data Load Status, Batch Name, Task Name, and Task Id to change the view from default.


You can click the icons under Status to see the status of the batch. The status displays Passed, Failed, and Pending status icons.

Figure 5-51 Log Viewer Service

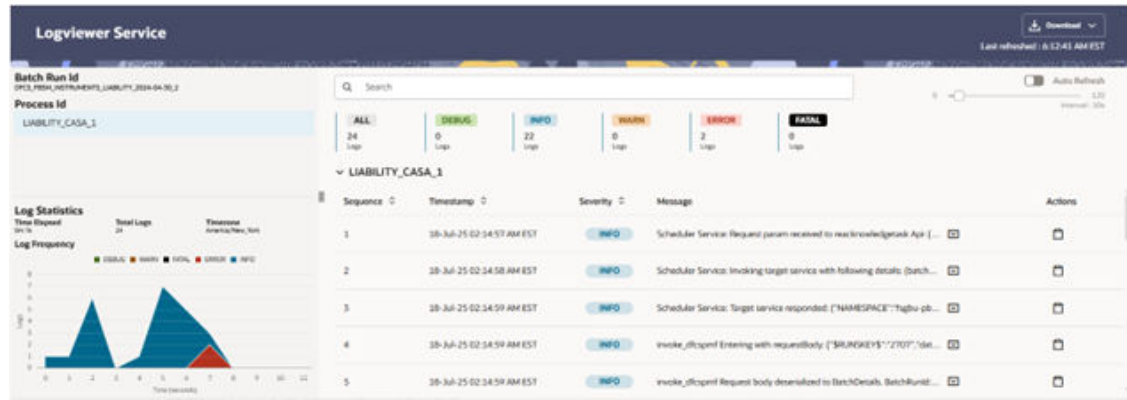

The Multi Column Sort allows you to define different columns to be displayed in the UI.

Figure 5-52 Multi Column Sort

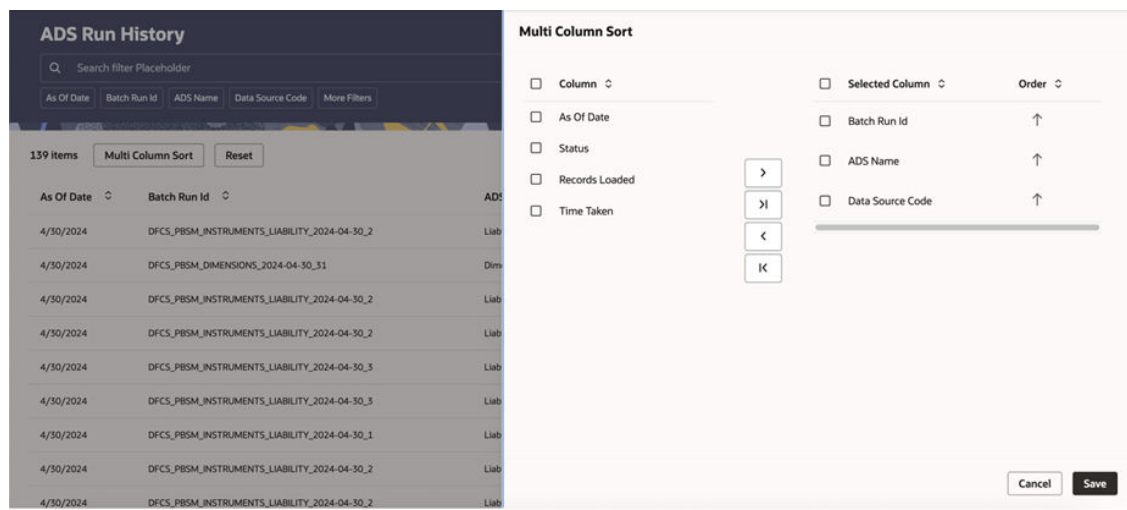

Select the required Columns and move them to the **Selected Columns** box and then click **Save**. You can also define the order of the column appearance by selecting ascending or descending setting the order. The ADS Run History UI displays the rows as per selection.

If you click **Reset**, all the filters, columns order will be reset and the ADS Run History UI displays the default view.

You can download the ADS Run History in Excel (.xlsx) format using the **Download** icon.

Click the **Columns** icon to select or deselect the columns you want to display in the ADS Run History data.

Create and Execute Batch

To create and execute the batch:

Note

Before executing the ADS batch, ensure the following prerequisite is met:

- If the PBSM tenant has undergone a G2 certification update, the updated PBSM wallet must be uploaded to DFCS prior to batch execution.
- If the wallet is not updated post-G2 certification, all ADS batch runs will fail regardless of data availability. Contact Oracle Support to complete the wallet upload.

1. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Define Batch**. For more details, see [Define Batch](#).
2. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Define Task**. For more details, see [Adding a Task](#).
Refer to the following table for Component and Parameters to be defined for different tasks.

Table 5-8 Components and Parameters

Component	Parameters	Target Tables
PBSM_DFCS_Data_Transfer_instruments	ADS Id: This displays list of data connectors available. Select one value from LOV. Data File Specification Id: This displays list of seeded and user defined DFS definitions. Select one relevant value for the selected ADS. Data Source Id: This displays members of 'Instrument Data Source' dimension. Select one value from LOV. Instrument data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage Assets Stage Liabilities Stage Derivatives Stage Fee Based Services Stage Loan Commitments Stage Off Balance Sheet
PBSM_DFCS_Data_Transfer_Dimensions	ADS Id: This displays list of data connectors available. Select one value from LOV. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage Dimensions Interface

Table 5-8 (Cont.) Components and Parameters

Component	Parameters	Target Tables
PBSM_DFCS_Data_Transfer_ExchangeRates	ADS Id: This displays list of data connectors available. Select one value from LOV. Rate Data Source Id: This displays members of 'Rate Data Source' dimension. Select one value from LOV. Data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage Exchange Rates
PBSM_DFCS_Data_Transfer_InterestRates	ADS Id: This displays list of data connectors available. Select one value from LOV. Rate Data Source Id: This displays members of 'Rate Data Source' dimension. Select one value from LOV. Data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage IRC Rate History
PBSM_DFCS_Data_Transfer_InstrumentSupplementary	ADS Id: This displays list of data connectors available. Select one value from LOV. Data File Specification Id: This displays list of seeded and user defined DFS definitions. Select one relevant value for the selected ADS. Data Source Id: This displays members of 'Instrument Data Source' dimension. Select one value from LOV. Instrument data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage Account Index History Stage Account Rate Tiers Stage Embedded Options Schedule Stage Payment Schedule Stage Interest Rate Schedule

Table 5-8 (Cont.) Components and Parameters

Component	Parameters	Target Tables
PBSM_DFCS_Data_Transfer_Transaction_Summary	ADS Id: This displays list of data connectors available. Select one value from LOV. Data File Specification Id: This displays the list of DFS rules defined for a Staging table. Select one relevant value for the selected ADS. Data Source Id: This displays members of 'Transaction' dimension. Select one value from LOV. Instrument data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage Asset Transaction Stage Liability Transaction Stage Fee Based Transaction Stage Off Balance Sheet Transaction
PBSM_DFCS_Data_Transfer_Customer	ADS Id: This displays list of data connectors available. Select one value from LOV. Data Source Id: This displays members of 'Customer' dimension. Select one value from LOV. Instrument data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage Customer Hierarchy Stage Customer Master
PBSM_DFCS_Data_Transfer_Management_Ledger	ADS Id: This displays list of data connectors available. Select one value from LOV. Data File Specification Id: This displays the list of DFS rules defined for a Staging table. Select one relevant value for the selected ADS. Data Source Id: This displays members of 'Transaction' dimension. Select one value from LOV. Instrument data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage Management Ledger

Table 5-8 (Cont.) Components and Parameters

Component	Parameters	Target Tables
PBSM_DFCS_Data_Transfer_EconomicInd	ADS Id: This displays list of data connectors available. Select one value from LOV. Rate Data Source Id: This displays members of 'Transaction' dimension. Select one value from LOV. Instrument data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage Economic Indicator Rate History
PBSM_DFCS_Data_Transfer_VolatilityRates	ADS Id: This displays list of data connectors available. Select one value from LOV. Rate Data Source Id: This displays members of 'Transaction' dimension. Select one value from LOV. Instrument data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage IRC Volatility Rate History Stage Interest Rate Schedule
PBSM_DFCS_Data_Transfer_VolatilitySurface	ADS Id: This displays list of data connectors available. Select one value from LOV. Rate Data Source Id: This displays members of 'Transaction' dimension. Select one value from LOV. Instrument data belonging to this source only will be moved from DFCS to PBSM. Optional Input: This can be used to specify any other input parameter in JSON Object/String.	Stage Volatility Surface Rate History

3. Select the seeded batch and click **Edit Parameters**. In the Dynamic Parameters pop-up window, change the date to the relevant As-of-Date, and then save the batch.
4. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Execute Batch**. For more information, see [Schedule Batch](#).
5. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Monitor Batch**. For more information, see [Monitor Batch](#).
6. Select the **Batch**, **MISDATE** and the **Batch name**. Select the latest execution and click **Start Monitor**.

List of Seeded Data File Specifications

The following pre-defined Data File Specifications are available for your use. You can choose to use them or your own definition while creating the batch as explained in previous section.

- ADS_Account_Index_History.csv
- ADS_Account_Rate_Tiers.csv
- ADS_Asset_Bill_Contracts.csv
- ADS_Asset_Cards.csv
- ADS_Asset_Investments.csv
- ADS_Asset_Leases_Contracts.csv
- ADS_Asset_Loan_Contracts.csv
- ADS_Asset_Overdraft_Accounts.csv
- ADS_Embedded_Options_Schedule.csv
- ADS_Fee_Based_Service_Other_Services.csv
- ADS_Ledger_Instrument_General_Ledger_Data.csv
- ADS_Liability_Borrowings.csv
- ADS_Liability_Casa.csv
- ADS_Liability_Prepaid_Cards.csv
- ADS_Liability_Term_Deposit_Contracts.csv
- ADS_Loan_Commitments_Commitment_Contracts.csv
- ADS_Payment_Schedule.csv
- ADS: Off Balance - Letter Of Credit Contracts.csv
- ADS: Off Balance - Credit Line Details.csv
- ADS: Derivative - Foreign Exchange Contracts.csv
- ADS: Derivative - Forwards Contracts.csv
- ADS: Derivative - Option Contracts.csv
- ADS: Derivative - Swaps Contracts.csv
- ADS: Off Balance Sheet Transaction Summary - Account Cost Summary.csv
- ADS: Liability Transaction Summary - Account Cost Summary.csv
- ADS: Fee Based Service Transaction Summary - Account Cost Summary.csv
- ADS: Asset Transaction Summary - Account Cost Summary.csv
- ADS: Management Ledger.csv

7

Maintenance

The Maintenance section of the PACS menu allows the user to check Batch Parameters to execute batches, define the mappings from Financial Elements to Instrument Line Items and define Segmentation Schemes for multiple Segment Types.

Topics:

- [Preferences](#)
- [Batch Parameters](#)
- [Financial Element Mapping](#)
- [Segmentation Mapping](#)
- [Line Item Display Order](#)
- [Geography Mapping](#)
- [Metrics Generator](#)

Preferences

This section discusses the procedure to set the Global and Application preference settings.

To configure the Preferences, perform the following steps:

1. From the LHS Menu, navigate to **Maintenance**, and select **Preferences** to display the Application Preference Screen.
2. Select the user from **Show Preferences for** the drop-down list. This has the following options:
 - **All User:** If you have Administrator Privileges, you can define preferences for the All User Group and their individual account, which may be the same or different from the All User Settings. The Administrator can also designate the All User Preferences as Editable or Non-Editable on a row-by-row basis. If the individual preference is selected, as is Editable, then End Users can update or override the Administrator's default value for their own individual account. If the Is Editable box is deselected, then End Users cannot change the default for their individual account.
 - **End-User:** If you do not have Administrator Privileges, then certain preference items are pre-set by the Administrator and you may not be allowed to change the value. All Application Preference Settings are displayed, regardless of the access privilege.

Note

Is Editable status is disabled since individual users are not expected to modify the following parameters.

Global Preferences

To set the Global Preferences, perform the following steps:

1. From the LHS Menu, navigate to **Maintenance** and select **Preferences**.
2. Under Global Preferences, enter the values as described in the following table.

Table 7-1 Global Preferences

Parameter	Description
Date Format	Select one value from the following list: • dd-MMM-yy • yyyy/MM/dd • MM/dd/yyyy • dd.MM.yyyy • MM-dd-yyyy • yyyy.MM.dd • yyyy/MMM/dd • dd-MMM-yyyy • dd/MMM/yyyy • yyyy.MMM.dd • dd/MM/yyyy • MM.dd.yyyy • dd-MM-yyyy • yyyy-MM-dd • dd.MMM.yyyy • yyyy-MMM-dd
Pagination Count	Pagination Records determine how many rows are displayed on summary and other screens. If you select Pagination Records to be 25 records, then any screen displaying results in a tabular format displays a maximum of 25 records.
Group Company Legal Hierarchy	This displays list of Legal Entity hierarchies that are configured in Dimension Management. Select one hierarchy that you want to use as the default legal entity.
Currency Rate Provider	This displays list of providers of Currency Exchange Rate. Value "Default" is seeded and selected as default. If you load Exchange Rates from more than one source like Reuters and Bloomberg then select one which you want the engine to use during processing. Members of dimension Rate Data Source are displayed in the drop-down list.
Functional Currency	A common functional currency is required which can be set here. This is required to consolidate the accounts' balances or charges at multiple hierarchy levels.

3. Click **Save** to confirm the changes or click **Reset to Default** to reset the Custom Configuration.

Application Preferences

Application Preferences Parameters are used to configure the Settings at the application level.

To update the Application Preferences, perform the following steps:

1. From the LHS Menu, navigate to **Maintenance** and select **Preferences**.
2. Click the **Application** tab and enter following values:

Table 7-2 Application Preferences Preferences

Parameter	Description
Parameters General	
Income Statement Hierarchy Selection	This displays list of Financial Element hierarchies that are configured in Dimension Management. Select one hierarchy that you want to use as the default income statement.
Balance Sheet Hierarchy Selection	This displays list of Financial Element hierarchies that are configured in Dimension Management. Select one hierarchy that you want to use as the default balance sheet.
Default Organizational Unit Hierarchy	This displays list of org unit hierarchies that are configured in Dimension Management. Select one hierarchy that you want to use as the default org unit.
Default Product Hierarchy	This displays list of product hierarchies that are configured in Dimension Management. Select one hierarchy that you want to use as the default product.
Default Region Hierarchy	This displays list of geographic location hierarchies that are configured in Dimension Management. Select one hierarchy that you want to use as the default geographic location.
Default Begin Financial Year	The default month that marks the beginning of the financial year for the bank.
Default End Financial Year	The default month that marks the ending of the financial year for the bank.
Processing - Application Specific	
Maximum Number of Segmentation Definition	The maximum number of segmentation definitions allowed. This is an integer value with maximum value allowed as 7.
Discount Factor for CLTV Processing (%)	Discount Factor for CLTV processing - this is a value from 0 to 100 (where 0 is 0% and 100 is 100%). The value allows up to 2 decimal places.
Maximum number of missing values in the historical time series	0
Maximum number of consecutive time-periods with a missing value for the account to be considered open and eligible for forecasting	0
Minimum number of historical time-periods to be considered for an account to be eligible for forecasting	12
Assumption Management Defaults	
Default Folder	This parameter allows you to define the default folder selection. The folder selection for all rule types will be defaulted to this selection within the summary page Search screen and when creating a new rule. This selection acts as the starting value for convenience only and users can change to any other available value at their discretion.

Table 7-2 (Cont.) Application Preferences Preferences

Parameter	Description
Access Type	This parameter allows you to set the default access typesetting. Selections include Read/Write and Read Only. This selection acts as the starting value for convenience only and users can change at their discretion.

- Click **Save** to confirm the changes or click **Reset to Default** to reset the Custom Configuration.

Batch Parameters

The Batch Parameters UI allows the user to check for the identifier to be utilized to correctly configure, schedule, and execute batches relevant to Profitability Analytics.

Figure 7-1 Batch Parameters - Summary

Object Name	Object Type Name	Object ID	Object ID
Balance Sheet Hierarchy	Hierarchy	HCY_PACS_BS	2511017056
Income Statement Hierarchy	Hierarchy	HCY_PACS_IS	3697528513
Product Hierarchy 1	Hierarchy	HCY_1678723729858	3263773727
Legal Entity Hierarchy 1	Hierarchy	HCY_1679555833922	505531139
VC Product Hierarchy One	Hierarchy	HCY_1680250717056	2484623515
VC LE Hierarchy One	Hierarchy	HCY_1680250927630	1677059271
VC Common COA Hierarchy One	Hierarchy	HCY_1680255574526	93807898
LOAN_TYPE_PRODUCT_HIERARCHY	Hierarchy	HCY_1680272374783	44360881
PRODUCT HEIRARCHY	Hierarchy	HCY_1681059146782	2625509721
Total GL Hierarchy	Hierarchy	HCY_1682139215734	289181492
All Org Unit Hierarchy	Hierarchy	HCY_1682139326824	3873334778
Line Item Hierarchy IS	Hierarchy	HIER_LINE_ITEM_IS	4094529290
Total 12			

To check for the Batch Parameters, follow these steps:

- To open the Batch Parameters screen, navigate to **Profitability Analytics Cloud**, select **Maintenance**, and then select **Batch Parameter**.
The Batch Parameters screen displays a list of parameters that are already configured in the system or that will be configured by user interaction with the application. This screen displays the following details related to element/s, such as Hierarchy/Hierarchies and Segment/Segments that will be utilized by the batch execution as a parameter:
 - Object Name
 - Object Type
 - Object CD
 - Object ID
- You can use the **Search** function to search for the out-of-the-box element objects.

3. You can use the **Object ID** from this screen to schedule your Batch.

Financial Element Mapping

The Financial Element Mapping user interface allows you to map the Financial Elements with the Portfolio Instrument columns.

Note

- For Income Statement and Balance Sheet Hierarchies, or any other Hierarchy created out of Financial Element dimension, a Financial Element carrying a percentage value cannot be added as a child, Sibling to a child or Leaf under Parent/ Child/ Sibling in the Hierarchy. Users are expected to be mindful not to map a portfolio column to a FE denoting a rate or apply an expression, where a divisor is used in a way that the column value effectively becomes a rate, thus preventing a meaningful roll-up to the node of the hierarchy.
- Please note that a given Financial Element can be added only once for defining a mapping to a Portfolio column.

Navigation in the Summary Screen

To open the Financial Element Mapping screen, from the LHS Menu, select **Maintenance**, and then select **Financial Element Mapping**.

The Financial Element Mapping summary screen is displayed with the following details:

- Financial Element Member (enables to map the Financial Element members with the portfolio instrument columns)
- Balance Sheet Type (Asset or Liability)
- Signage (plus or minus)
- Portfolio Column Name (enables to map portfolio instrument columns calculated via Profitability Management)
- Filter Clause (allows to select one or more values out of all the portfolio columns and apply filtering to the underlying accounts for this mapping)
- Evaluation Formula (allows to select one or more portfolio columns to be used to compute a calculation, leveraging math operators as "+", "-", "*", "/" and "%", and apply the resulting formula to the underlying accounts for this mapping)
- Action menu (edit and delete options are available only for user created mapping entries)

The Financial Element Mapping summary screen displays the Seeded Financial Elements as well as the new user defined entries.

Figure 7-2 Financial Elements Summary Screen

Financial Element	Balance Sheet Type	Signage	Portfolio Column Name	Filter Clause	Evaluation Formula	Action
76 - Beginning Gross Rate	Asset	+	ACCURED_INTEREST_GROSS			----
100 - Ending Balance	Asset	+	ATM_EXP	K_STEL_FLG = 1		----
140 - Average Balance	Asset	+	ACCURED_INTEREST_GROSS			----
160 - Average Net Rate	Asset	+	ACCURED_INTEREST_NET			----
9001 - Interest Income	Asset	+			CENTRAL_BANK_INTEREST + ACCURED_INTEREST_GROSS	----
9003 - Amortization of Discount for Asset	Asset	-	AMORT_DISC_PREM_CHG_CR			----
9012 - Transfer Pricing Charge	Asset	+	CHARGE_CREDIT_ALL_RATE			----
9014 - Charge for Liquidity	Asset	+	LIQUIDITY_PREM_CHARGE_CREDIT			----
9015 - Charge for Basis Risk	Asset	+	BASIS_RISK_CHARGE_CREDIT			----
9016 - Charge for Optionality	Asset	+	CHARGE_CREDIT_OPTION			----
9022 - Amortization of Premium for Asset	Asset	+	AMORT_DISC_PREM_CHG_CR			----
9021 - Charge for Other FTP Adjustment	Asset	+	OTHER_ADD_ON_CHARGE_CREDIT			----
9032 - Charge for Pricing Incentive	Asset	+	PRICING_INC_CHARGE_CREDIT			----
90 - Beginning Balance	Liability	-	ACCURED_INTEREST_GROSS			----

Search

There are two Search options provided to search the Financial Element Mapping on the summary page.

Figure 7-3 Search Option Collapsed

Financial Element Mapping

Financial Element

Signage

Filter Clause

Balance Sheet Type

Portfolio Column Name

Search

Reset

Cancel

To search the Financial Element Mapping, follow these steps:

1. Click the **Search** icon on the Search pane to collapse (display) the Criteria window.
2. Enter the **Financial Element Name**, and/or **Signage**, and/or **Filter Clause**, and/or **Balance Sheet Type**, and/or **Portfolio Column Name**, and then click **Search** to display the Financial Element Mapping that matches the criteria.
The search results are displayed in a table containing all the Financial Element Mappings that meet the search criteria.
3. Click **Reset** to remove the criteria on the Search window and start with new criteria definition.
4. Click **Cancel** to exit from search pane and refresh the window.
5. The other method to search a Financial Element Mapping is using the **Field Search** option. The Field Search is an inline wildcard search that allows you to enter value partially

or fully and the row that match the entered string in any of the columns is fetched in the Summary table.


Figure 7-4 Field Search



Financial Element Mapping Summary Table

This section of the screen presents a table containing the already created Financial Element Mappings.

Figure 7-5 Financial Element Mapping Summary Table – Action Column

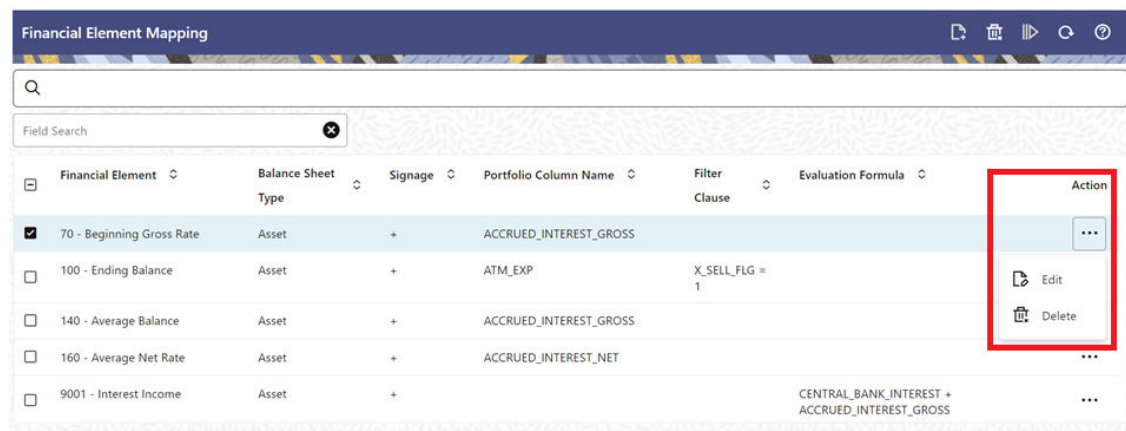

Financial Element	Balance Sheet Type	Signage	Portfolio Column Name	Filter Clause	Evaluation Formula	Action
☒ 70 - Beginning Gross Rate	Asset	+	ACCRUED_INTEREST_GROSS			...
☐ 100 - Ending Balance	Asset	+	ATM_EXP	X_SELL_FLG = 1		Edit Delete
☐ 140 - Average Balance	Asset	+	ACCRUED_INTEREST_GROSS			...
☐ 160 - Average Net Rate	Asset	+	ACCRUED_INTEREST_NET			...
☐ 9001 - Interest Income	Asset	+			CENTRAL_BANK_INTEREST + ACCRUED_INTEREST_GROSS	...

The Financial Element Mapping summary table displays the following details:

- Financial Element
- Balance Sheet Type
- Signage
- Portfolio Column Name
- Filter Clause
- Evaluation Formula
- Action

The Action column on the Financial Element Mapping Summary screen allows you to perform different functions:

- **Edit:** Click the Edit icon to modify a previously saved Financial Element Mapping as the user is launched into the Financial Element Mapping Detail screen in edit mode.
- **Delete:** Click Delete to delete the Financial Element Mapping you have selected.

Adding a Financial Element Mapping

This procedure describes the steps to create Financial Elements, and then map the segments to the segment types as a part of the profitability insight analysis.

To do the segmentation mapping, follow these steps:

1. To open the Financial Element Mapping screen, navigate to **Profitability Analytics Cloud**, select **Maintenance**, and then select **Financial Element Mapping**.

Figure 7-6 Financial Element Mapping - Add




2. Click **Add** to open the Financial Element Mapping Definition screen.

Figure 7-7 Financial Element Mapping – Definition Screen


3. In the **Financial Element Details** section of the screen, the following elements are displayed for the user selection:
 - **Financial Element Member:** This is the drop-down list for Financial Element Member selection.
 - **Balance Sheet Type:** The user can define this mapping either for Asset or Liability or simply not assign a value to apply the mapping to both.
 - **Signage:** The user can assign either a negative or a positive signage to the portfolio column to be used for the mapping definition.
 - **Portfolio Column Name:** The user can pick up the corresponding Portfolio column to be used for the mapping definition and attaching it to the previously selected Financial Element Member.
 - **Filter:** By clicking on the three right hand side dots, the user can select one or more values out of all the portfolio columns and apply filtering to the underlying accounts for this mapping. For example, **X_SELL_FLG = 1**.

Figure 7-8 Financial Element Mapping – Filter Formula

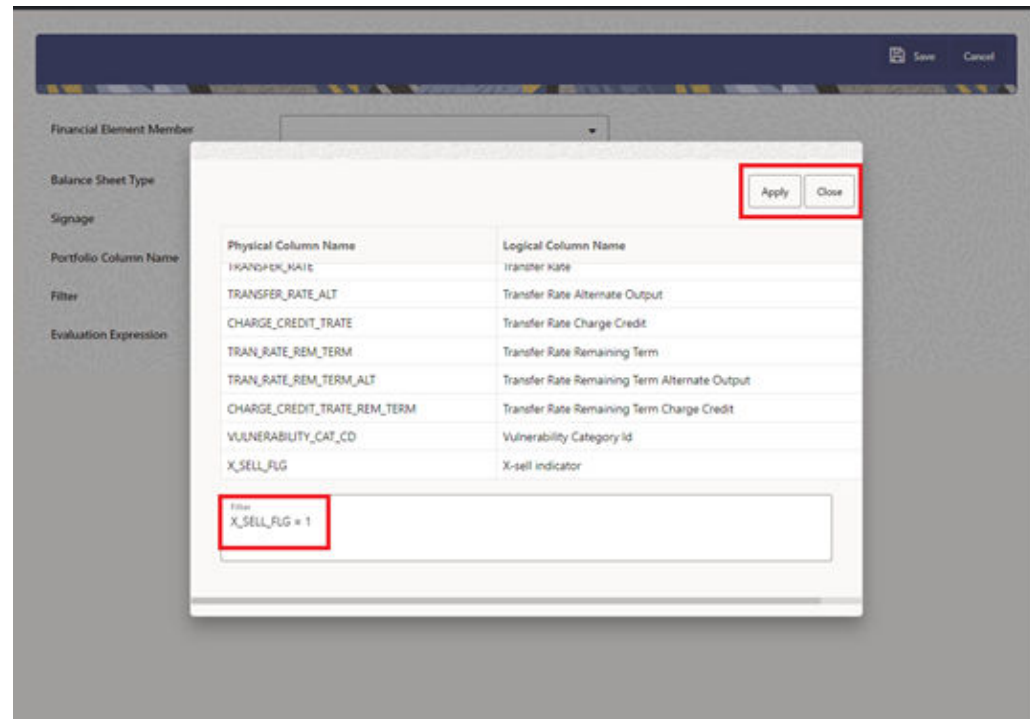

- Evaluation Expression:** By clicking on the three right hand side dots, the user can select one or more portfolio columns to be used to compute a calculation, leveraging math operators as "+", "-", "*", "/" and "%", and apply the resulting formula to the underlying accounts for this mapping. For example, **MARKETING_EXP + MANAGEMENT_FEES - MAIL_ORIGINATION_EXP**.

Figure 7-9 Financial Element Mapping – Evaluation Expression

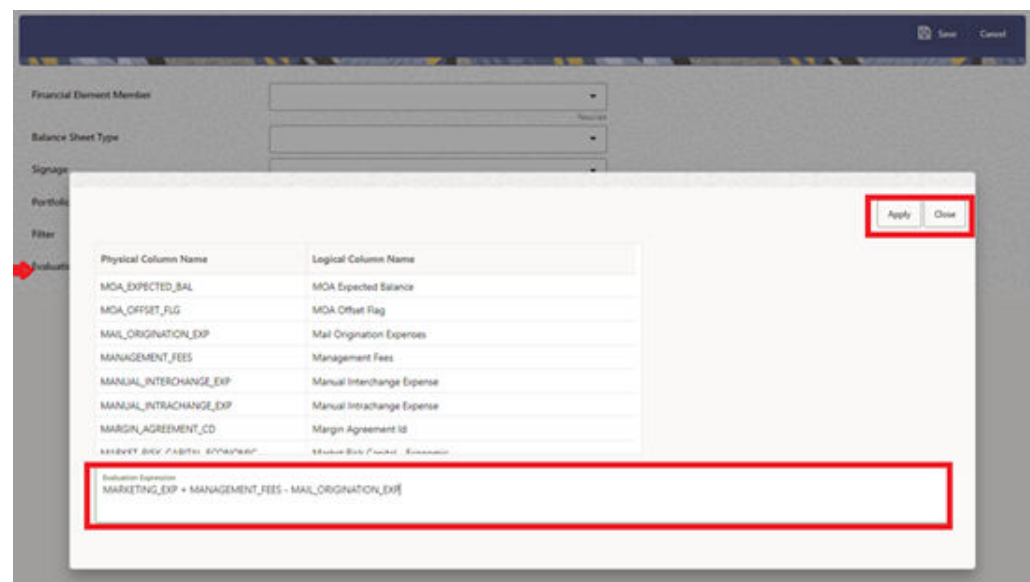

- Click **Apply**.

Segmentation Mapping

Segmentation involves the grouping of customer accounts based on different account level dimensions and the specified criteria on them.

Users can select from a set of dimensions to create segments for different Segment types in the Segmentation Mapping UI. Accounts grouped together in a particular segment, are expected to behave, and perform similarly. The objective of segmentation is to achieve easier cross sell and upsell and enhance value the customer drives for the bank.

Navigation in the Summary Screen

To open the **Segmentation Mapping** screen, from the LHS Menu, select **Maintenance**, and then select **Segmentation Mapping**. When you navigate to the Segmentation Mapping Summary screen, the Segments stored within your current Default Folder are displayed in this screen.

The Segmentation Mapping screen is divided under two sections: the Search section and the Summary table. The title bar of the summary page provides the following actions for the user:

Figure 7-10 Segmentation Mapping Summary Screen - Title Bar



The Action icons are as follows:

Figure 7-11 Segmentation Mapping Summary Screen - Action Icons




- **Add:** Click the Add icon to create a new Segment. The Add icon is disabled if any of the rows in the summary table are selected.
- **Multiple Delete:** Select one or more Segments in the summary table and click the Delete icon to delete the selected Segments.
- **Refresh:** Click this icon to refresh the summary page.
- **Help:** Click this icon to view the Segmentation Mapping help page.

Search

There are two Search options provided to search the Segmentation Mapping on the summary page.


Figure 7-12 Summary Screen Search Option Collapsed

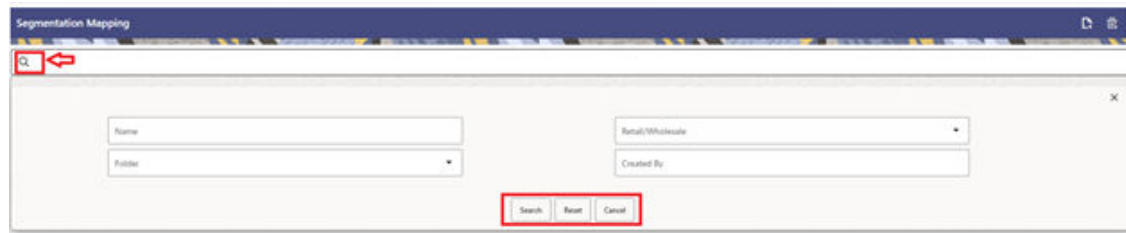

To search the Segmentation Mapping, follow these steps:

1. Click the **Search** icon on the Search pane to collapse (display) the Criteria window.
2. Enter the **Segmentation Mapping Name** and/or **Retail/Wholesale flag** and/or **Folder** and/or **Created By** and click **Search** to display the Segmentation Mapping that matches the criteria.
The search results are displayed in a table containing all the Segmentation Mappings that meet the search criteria.
3. Click **Reset** to remove the criteria on the Search window and start with new criteria definition.
4. Click **Cancel** to exit from the Search pane and refresh the window.
5. The other method to search a Segmentation Mapping is using the **Field Search** option.
The Field Search is an inline wildcard search that allows you to enter value partially or fully and the row that match the entered string in any of the columns is fetched in the Summary table.

Figure 7-13 Segmentation Mapping- Field Search

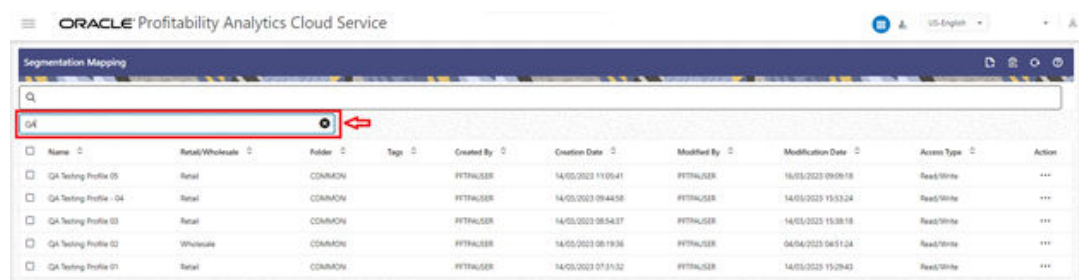

Segmentation Mapping Summary Table

This section of the screen presents a table containing the already created Segmentation Mappings.

Figure 7-14 Segmentation Summary Table – Action Column


Name	Retail/Wholesale	Folder	Tags	Created By	Creation Date	Modified By	Modification Date	Access Type	Action
Profile_Type_Segment_002	Retail	COMMON		PTTHALUSER	13/03/2023 12:54:45	PTTHALUSER	21/03/2023 10:52:34	Read/Write	...
SEGMENT_002 Testing	Retail	COMMON		PTTHALUSER	14/03/2023 11:25:59	PTTHALUSER	15/03/2023 14:00:23	Read/Write	View
QA Testing Profile 05	Retail	COMMON		PTTHALUSER	14/03/2023 11:05:41	PTTHALUSER	14/03/2023 09:09:18	Read/Write	Edit
QA Testing Profile - 04	Retail	COMMON		PTTHALUSER	14/03/2023 09:44:58	PTTHALUSER	14/03/2023 10:53:34	Read/Write	Save As
QA Testing Profile 03	Retail	COMMON		PTTHALUSER	14/03/2023 08:54:37	PTTHALUSER	14/03/2023 10:38:18	Read/Write	Delete
QA Testing Profile 02	Wholesale	COMMON		PTTHALUSER	14/03/2023 08:19:58	PTTHALUSER	04/04/2023 04:51:34	Read/Write	...
QA Testing Profile 01	Retail	COMMON		PTTHALUSER	14/03/2023 07:11:32	PTTHALUSER	14/03/2023 10:29:43	Read/Write	...
Pre-Prod Testing	Retail	COMMON		PTTHALUSER	14/04/2023 14:20:00	PTTHALUSER	14/04/2023 14:20:00	Read/Write	...
Consumer Profile	Retail	COMMON		PTTHALUSER	13/03/2023 09:10:45	PTTHALUSER	13/03/2023 09:17:05	Read/Write	...
Copy of Driving Segment	Retail	COMMON		PTTHALUSER	13/03/2023 13:14:58	PTTHALUSER	13/03/2023 13:14:58	Read/Write	...
Customer Segmentation Test	Retail	COMMON		PTTHALUSER	13/03/2023 13:13:23	PTTHALUSER	13/03/2023 13:15:50	Read/Write	...
Marketing Profile	Retail	COMMON		PTTHALUSER	10/03/2023 13:43:27	PTTHALUSER	10/03/2023 13:43:27	Read/Write	...
Corporate Profile	Wholesale	COMMON		PTTHALUSER	10/03/2023 13:03:59	PTTHALUSER	13/03/2023 13:08:59	Read/Write	...
Wholesale Testing 1	Wholesale	COMMON		PTTHALUSER	07/04/2023 05:34:42	PTTHALUSER	07/04/2023 05:34:42	Read/Write	...

The Segmentation Mapping summary table displays the following details:

- Name
- Retail/Wholesale
- Folder
- Tags
- Created By
- Creation Date
- Modified By
- Modification Date
- Access Type
- Action

The Action column on the Segmentation Mapping summary screen allows you to perform different functions:

- **View:** Click the View icon to view the contents of a Segmentation Mapping on a Read-only basis as the user is launched into the Segmentation Mapping summary screen in view mode.
- **Edit:** Click the Edit icon to modify a previously saved Segmentation Mapping as the user is launched into the Segmentation Mapping Detail screen in edit mode.
- **Save As:** Click on this option to create a copy of an existing Segmentation Mapping. The Save As pop-up window allows you to enter the Name, Description, Folder, and Access Type Details for the copy model.

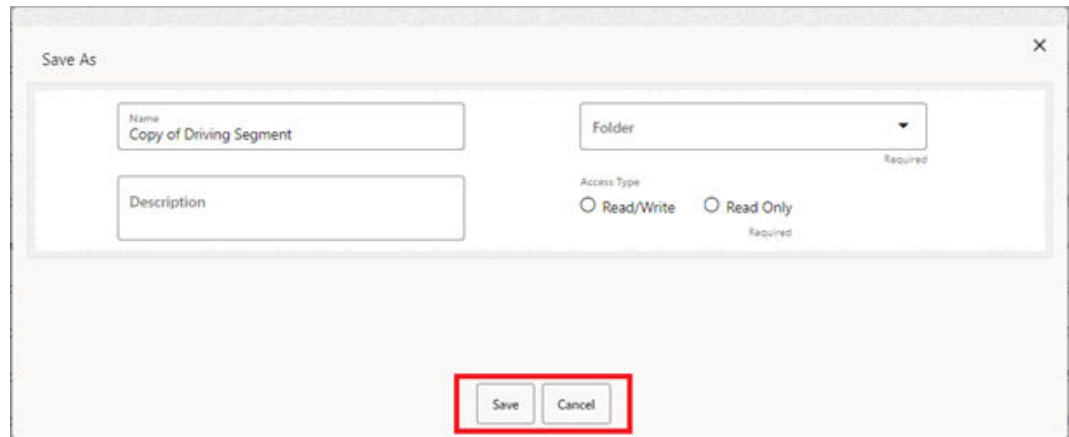Figure 7-15 Save As Dialog BoxA screenshot of a 'Save As' dialog box. It has a title bar with a close button (X). The main area contains a 'Name' text box with 'Copy of Driving Segment' entered, a 'Folder' dropdown menu, and a 'Description' text box. Below these is an 'Access Type' section with two radio buttons: 'Read/Write' and 'Read Only'. The 'Read Only' option is selected. At the bottom right, there are 'Save' and 'Cancel' buttons, which are highlighted with a red rectangle.

- **Delete:** Click Delete to delete the Segmentation Mapping you have selected.

Creating a Segmentation Mapping

This procedure describes the steps to create segments, and then map the segments to the segment types as a part of the profitability insight analysis.

To do the Segmentation Mapping, follow these steps:

1. To open the Segmentation screen, navigate to **Profitability Analytics Cloud**, select **Maintenance**, and then select **Segmentation Mapping**.

Figure 7-16 Segmentation Mapping – Add

2. Click **Add** to open the Segmentation Mapping Definition screen.

Figure 7-17 Segmentation Mapping - Add

The screenshot shows the 'Segmentation Mapping - Add' interface. At the top, there are 'Process Tabs' with 'Initial Definition' and 'Segment Type'. Below this is the 'Segmentation Details' section, which is highlighted with a red border. It includes a 'Name' text box, a 'Description' text box, a 'Folder' dropdown menu set to 'COMMON', and 'Action Type' radio buttons for 'Read Only' and 'Read/Write'. There are also 'Read/Wholesale' radio buttons for 'Retail' and 'Wholesale'. Below this is the 'Segmentation Dimensions' section, which has a 'Selected Dimensions' field containing 'Industry X' and 'Product X'. At the bottom is the 'Audit Info' section, which includes a sidebar with 'Audit', 'Comments', and 'Tags' icons, and a main area with fields for 'Created By', 'Modified By', 'Authorized By', 'Created Date', 'Modified Date', and 'Authorized Date'.

3. In the **Segmentation Details** section of the screen, enter the following details:

- **Name:** Name of the segment.
- **Description:** A description for the segment.

You can create segments for Retail or Wholesale Customer types. The various details you enter for these customer types may differ.

Note

If you do not specify the segment Retail or Wholesale, the service will default it to Retail.

4. In the **Segmentation Dimensions** section of the screen, select the relevant **Segmentation Dimension**. The drop-down list displays a list of segments based on which you create different segments within your segment type.

- **Retail Customer Dimensions:**
 - Age
 - Profession
 - Customer Income
 - Product
 - Net Income Before Taxes
 - Asset Balance
 - Credit Score
 - No. of Transactions

- Average Transaction Amount
- Number of Accounts
- **Wholesale Customer Dimensions:**
 - Age of Corporate
 - Industry
 - Customer Income
 - Product
 - Net Income Before Taxes
 - Asset Balance
 - Credit Rating
 - No. of Transactions
 - Average Transaction Amount
 - Number of Accounts

Note

This is the seeded list as of now and will be open to amendments in the future to accommodate requests from banks to add more dimensions to support relevant use cases.

Figure 7-18 Segmentation Mapping - Segment Type

The screenshot displays the 'Segmentation Mapping' application interface. At the top, there's a header bar with 'Save', 'Cancel', and a help icon. Below the header, a 'Process Tabs' section shows two steps: 'Initial Definition' (completed) and 'Segment Type' (active). The 'Segment Type' section is highlighted with a red border and contains the following fields:

- Name:** Text field containing 'Test Segmentation Mapping'.
- Segment Name:** Text field containing 'BRONZE - 4'.
- Segment Mapping:** A table with dimensions and their mapped values.

Selected Dimensions	BRONZE - 4
Asset Balance	0 - 500000
Credit Score	501 - 720
Industry	Finance - 200
No of Transactions	101 - 500

Below the 'Segment Mapping' section, there's an 'Audit Info' section with a text area for 'Add comments here' and a 'Comment' button.

Figure 7-19 Segmentation Mapping - Segment Type

The screenshot shows the 'Segmentation Mapping' interface. The 'Process Table' at the top indicates the current step is 'Segment Type'. The 'Segment Type' section includes a 'Name' field with 'Text Segmentation Mapping', a 'Business Unit' dropdown set to 'Retail', and a 'Segment Name' dropdown set to 'BRONZE - 4'. An 'Add Segment Name' button is visible. The 'Segment Mapping' section, highlighted with a red border, shows a table of dimensions and their value bands:

Selected Dimensions	BRONZE - 4
Asset Balance	0 - 500000
Credit Score	501 - 720 200 - 500
Industry	Finance - 200
No of Transactions	0 - 10 11 - 20 21 - 100

A red arrow points to the 'No of Transactions' row. An 'Apply' button is located at the top right of the Segment Mapping section.

5. Click **Add Segment Name** after selecting your Segment Name. You can select multiple Segment Names and add them to your Segment Name list. At this point, the **Actions** menu is activated. You can select to do the following actions to the Segment Name/s you added:
 - View
 - Edit
 - Delete
6. To assign values to the Dimension/s you previously selected, a list of value bands or dimension members, you require to click **Edit** for each of the Segment Names you have added to the list.

Figure 7-20 Segmentation Mapping

This screenshot shows the same 'Segmentation Mapping' interface as Figure 7-19. The 'Segment Name' is 'BRONZE - 4'. The 'Segment Mapping' section shows the same table of dimensions and value bands. A red arrow points to the 'No of Transactions' row. The 'Apply' button is visible at the top right of the Segment Mapping section.

7. Click **Apply**. Repeat the steps for assigning the new Dimension Name values to the other Segments available in your list.

A confirmation message *Mapping is applied* is displayed.

8. At any point of time, you can edit the Assignment by clicking the **Edit** button on a given Segment.
9. Click **Save**.
This returns to the Segmentation Mapping screen and the newly added Segmentation Mapping is displayed.

Line Item Display Order

The Line Item Display Order UI allows the user to customize the display order of the Income Statement line items. This helps users to maintain the display order on the Financial Element hierarchies for both out-of-the-box hierarchies and custom hierarchies at the BI layer required by Profitability Analytics. This display order holds good for both top-down and bottom-up reporting and enforces a particular display order for the Income Statement and Balance sheet hierarchies.

To open the Line Item Display Order, from the LHS menu, select **Profitability Analytics Cloud**, select **Maintenance**, and then select **Line Item Display Order**.

Figure 7-21 Line Item Display Order

	Hierarchy Name	Financial Element Name	Display Order ID	Display Order Level	Read Only Flag
☒	Balance Sheet Hierarchy - HCY_PACS_BS	Balance Sheet - 9226	0	0	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Primary Balances - 9335	1	1	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Static Net Par Balance - 2002	1.1	3	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Static Net Par Balance - 2002	1.1	3	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Deferred Balance - 9328	1.2	3	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Deferred Balance - 9328	1.2	3	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Book Balance - 9320	1.3	3	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Book Balance - 9320	1.3	3	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Other Balances - 9333	2	1	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Float - 9038	2.1	3	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Float - 9038	2.1	3	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Central Bank Reserve - 9041	2.2	3	Yes
☐	Balance Sheet Hierarchy - HCY_PACS_BS	Central Bank Reserve - 9041	2.2	3	Yes

The summary screen displays a list and order of parameters that are already available out of the box. You can search and edit the Line Items with Hierarchy Name, Financial Element Name, Display Order ID, Display Order Level, and Read Only Flag.

You can click on each header to filter the line items and display the items based on a choice.

Figure 7-22 Header Options

	Hierarchy Name	Financial Element Name	Display Order ID	Display Order Level	Read Only Flag

For example, you can click **Hierarchy Name** to open a filter where you can select the available options. Then click any or all of the other header names, define the search criteria and then click Go to display the lines items.

You can add a new row to the summary list by clicking **Add New Row**. This inserts a new row in the summary table and allows you to select the Hierarchy Name, Financial Element Name, Display Order ID, Display Order Level, and/or Read Only Flag.

Row Actions

The summary page allows to change the view. You can select a row and click the **Row Actions** that are:

- **Single Row View:** For the rows where Read Only Flag is set to Yes, you cannot edit or revert the changes. However, you view them in Single Row View.

Figure 7-23 Single Row View


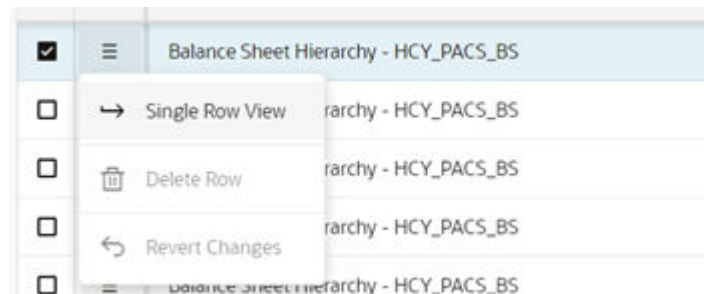


Figure 7-24 Single Row View Details

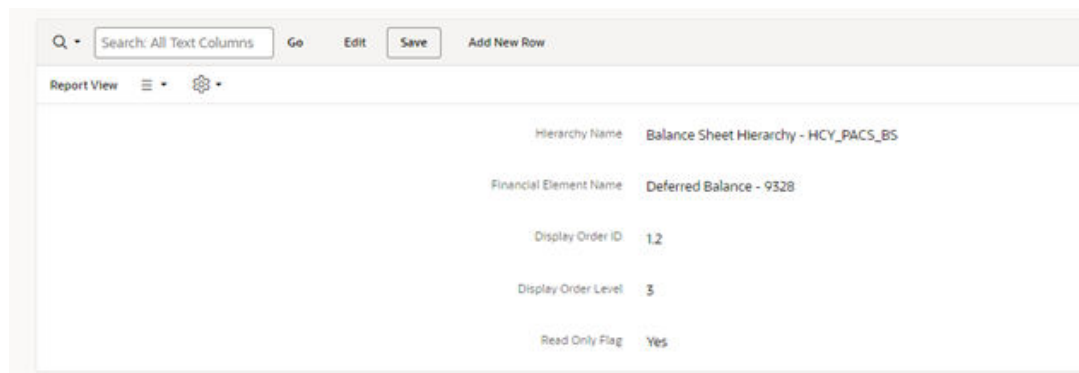

- **Delete Row:** Is possible only for user-defined line items.
- **Revert Changes:** Is possible only for user-define line items.

Report View – Change Menu

From the Report View – Change Menu, you can add a new row, create a duplicate of an exiting line item, delete a line item, refresh the view, and revert the changes of an existing line item.

Report View – Settings Menu

The Settings Menu allows you to:

- Exclude the null values from the summary page.

- Displayed Columns

Adding a New Row

To add a new row:

1. Click **Add a New Row** in the summary page.

Figure 7-25 Add a New Row

	Hierarchy Name	Financial Element Name	Display Order ID	Display Order Level	Read Only Flag
☐	Balance Sheet Hierarchy - HCY_PAC'S_BS	Balance Sheet - 9226	0	0	Yes
☐	Balance Sheet Hierarchy - HCY_PAC'S_BS	Primary Balances - 9335	1	1	Yes
☐	Balance Sheet Hierarchy - HCY_PAC'S_BS	Static Net Par Balance - 2002	1.1	3	Yes
☒					No

2. Select or enter the following:
 - **Hierarchy Name** (mandatory): Select a Balance Sheet Hierarchy or Income Statement Hierarchy driver. You can create a Hierarchy and will be able to see on that selection.
 - **Financial Element Name** (mandatory): Enter the name for the Financial Element. You must select only a single value.
 - **Display Order ID**: Enter the Order ID for the Financial Element which you want the Balance Sheet Hierarchy or Income Statement or any other custom hierarchy to be displayed on the Summary screen. For example, refer to the Display Order ID of the seeded hierarchies.
 - **Display Order Level**: Enter the Level for the Financial Element that you want to place in the Balance Sheet and/or Income Statement or any other custom hierarchy. For example, refer to the Display Order Level of the seeded hierarchies.
 - **Read Only Flag**: This is by default Yes for all the seeded hierarchy displayed line item values. For custom line item display orders the default value is always set to No, so that you can always change the custom line items display entries at later stage.
3. Click **Save** to display the new Hierarchy Name in the Summary screen.

For Income Statement and Balance Sheet Hierarchies, or any other Hierarchy created out of Financial Element dimension, a Financial Element carrying a percentage value cannot be added as a child, Sibling to a child or Leaf under Parent/ Child/ Sibling in the Hierarchy. Users are expected to be mindful not to map a portfolio column to a FE denoting a rate or apply an expression, where a divisor is used in a way that the column value effectively becomes a rate, thus preventing a meaningful roll-up to the node of the hierarchy.

Geography Mapping

The Geography Mapping UI allows you to render the Org Unit, Branch, Relationship Manager and corresponding Geographic Locations onto the OOTB Business Analytics and account entries.

The Geography information is seeded for your consumption. You can select a geographic location and map it to the key dimensions of the Profitability Analytics Cloud Service.

This section describes the procedure to map the Geographies to key dimensions mentioned above.

To navigate to the Geography Mapping – Summary screen, from the LHS Menu, select **Maintenance**, and then select **Geography Mapping**.

Figure 7-26 Geography Mapping - Summary screen

[illegible]

The LHS of the summary screen displays the following elements to be used as selection filters to navigate end user-defined mappings:

- Customer Region Name
- Org Unit
- Branch
- Relationship Manager
- Geographic Location
- Country Code
- State or Province

Creating a New Mapping

To create a new mapping:

1. Click **New Mapping** on the Summary screen.
The World Region – New Mapping screen is displayed.

Figure 7-27 World Region - New Mapping

Country Code	Country Name	State Or Province Name	City Name
US	United States	Ark	Council Bluffs
US	United States	Ark	Davenport
US	United States	Ark	Oshtemo
US	United States	Ark	Stear City
US	United States	Ark	Spencer
US	United States	Ark	Warren
US	United States	Kan	Colfaxville
US	United States	Kan	Derby City
US	United States	Kan	Emporia
US	United States	Kan	Garden City
US	United States	Kan	Goodland
US	United States	Kan	Hays
US	United States	Kan	Holderness
US	United States	Kan	Kansas City
US	United States	Kan	Lansdale
US	United States	Kan	Marquette
US	United States	Kan	Salina
US	United States	Kan	Topeka
US	United States	Kan	Wichita
US	United States	Kan	Woodbury
US	United States	Kan	Woodbury

2. Select the relevant **Country Code**.
The summary screen area displays all the cities with the Province and City Names.
3. Select the relevant **County Names** and for mapping.

Note

You can select few or all the County Names for mapping.

4. Click the **Map** button.
The Mapping pop-up window is displayed.

Figure 7-28 Mapping

Mapping [X]

Org Unit [v]

Branch [v]

Relationship Manager [v]

Geographic Location [v]

Custom Region Name [v]

Cancel [Map]

5. Select any one or all of the following details:
 - Org Unit
 - Branch
 - Relationship Manager
 - Geographic Location
6. Select the **Customer Region Name**. You can select from the options in the available values or enter a custom Region Name.
7. Click **Map**.
The newly create mapping details are displayed in the Summary page.

Unmapping a Geography Mapping

To unmap a previous mapped Geography:

1. Navigate to the Geography Mapping – Summary screen.
2. Select any of the following:
 - Custom Region Name
 - Org Unit
 - Branch
 - Relationship Manager
 - Geographic Location
 - Country Code
 - State of Province

The available mappings are displayed in the screen.

3. Select the mapping that you want to unmap. You can select one or multiple or all the mappings.
4. Click the **Unmap** button.
After confirming, the selected mapping will be unmapped and removed from the Summary screen.

Metrics Generator

The Metric Generator UI allows you to create custom profitability or other metrics that are not available out of the box in the Profitability Analytics Cloud Service BI dashboards.


Note

The Metric Generator flow helps you to define new metrics for Management Ledger and Instruments. After you execute the corresponding Runchart, you will be able to retrieve a sample report by clicking the Analytics button on the Metric Generator - Summary screen. The other option to generate the sample Report is to navigate from LHS menu. You will need to select Custom Metrics from the Analytics menu.

To navigate to the Metric Generator – Summary screen, from the LHS Menu, select **Maintenance**, and then select **Metrics Generator**.

The Metrics Generator summary screen is displayed.

Figure 7-29 Metrics Generator Summary Screen

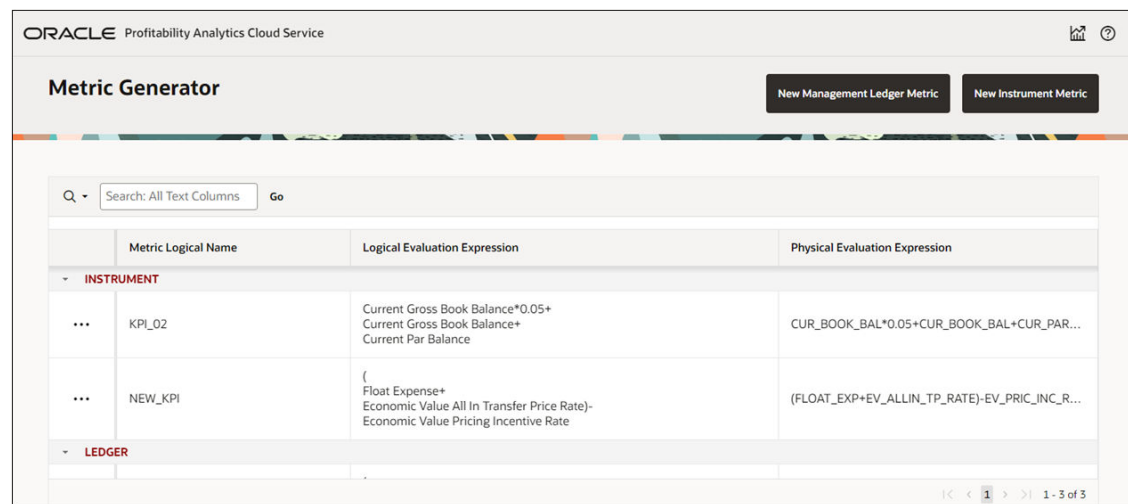

	Metric Logical Name	Logical Evaluation Expression	Physical Evaluation Expression
▼	INSTRUMENT		
...	KPI_02	Current Gross Book Balance*0.05+ Current Gross Book Balance+ Current Par Balance	CUR_BOOK_BAL*0.05+CUR_BOOK_BAL+CUR_PAR...
...	NEW_KPI	(Float Expense+ Economic Value All In Transfer Price Rate)- Economic Value Pricing Incentive Rate	(FLOAT_EXP+EV_ALLIN_TP_RATE)-EV_PRIC_INC_R...
▼	LEDGER		

This screen displays the following elements to be used as selection filters to navigate end user-defined mappings:

- Metric Logical Name
- Logical Evaluation Expression
- Physical Evaluation Expression

For this summary screen, you can do the following:

- Search
- Edit/Delete
- Access the Custom Metric Report

Search a Metric

To search for a Metric:

1. Navigate to the Metric Generator - Summary screen.
2. Click **Select Columns to Search** and select any of the following:
 - All Text Columns
 - Metric Logical Name
 - Logical Evaluation Expression
 - Physical Evaluation Expression
 - Table Source
3. Enter the search phrase in the Search text box and then click **Go**.
The screen displays the metric that match the search criteria.

Edit/Delete a Metric

To edit or delete a metric:

1. Navigate to the Metric Generator - Summary screen.
2. Select an Instrument or Ledger that you want to edit or delete.
3. Click the Actions menu and select **Edit** or **Delete**.
 - If you select **Edit**, the selected Instrument or Ledger is opened in the definition mode. You can edit the relevant details and save the details.
 - If you select **Delete**, a confirmation message is displayed. Select **OK** to delete.

Access to Custom Metric Report


To access the Custom Metric Report, click the  icon.

Creating a New Management Ledger Metric

To create a new Management Ledger Metric:


1. Click Add New Management Ledger Metric on the Summary screen.

Figure 7-30 Metric Generator New Management Ledger Metric



This will take you to the next screen to define the custom metric and input the evaluation expression.

Figure 7-31 Add Management Ledger Metric

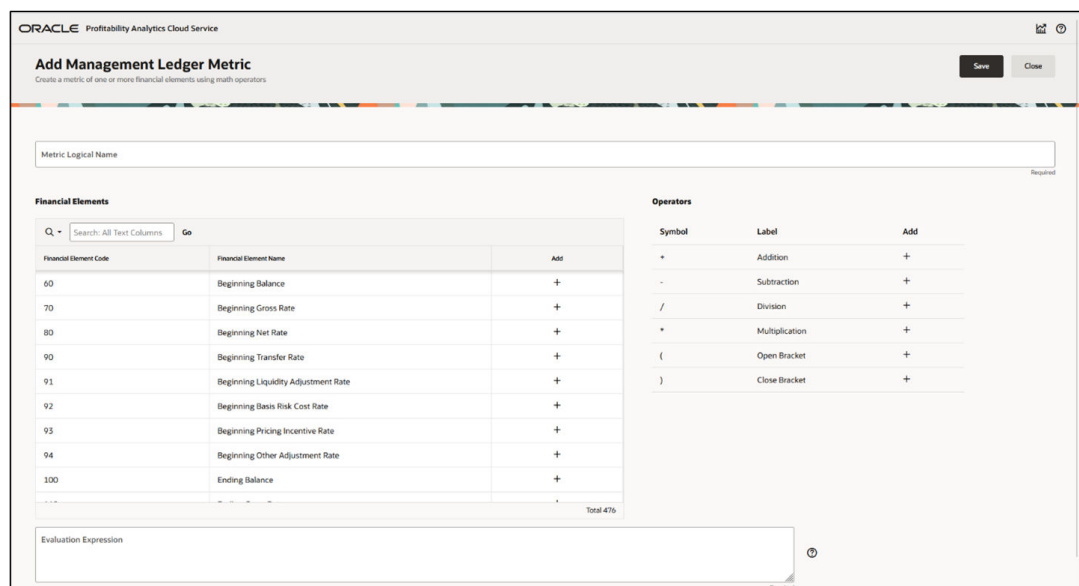

Financial Elements

Financial Element Code	Financial Element Name	Add
60	Beginning Balance	+
70	Beginning Gross Rate	+
80	Beginning Net Rate	+
90	Beginning Transfer Rate	+
91	Beginning Liquidity Adjustment Rate	+
92	Beginning Basis Risk Cost Rate	+
93	Beginning Pricing Incentive Rate	+
94	Beginning Other Adjustment Rate	+
100	Ending Balance	+
		Total 476


Operators

Symbol	Label	Add
+	Addition	+
-	Subtraction	+
/	Division	+
*	Multiplication	+
(	Open Bracket	+
)	Close Bracket	+

2. Enter the **Metric Logical Name** of the custom metric as it will appear in the reports.
3. Select any one of the following details:

- Financial Element Code
- Financial Element Name
- Operator


Figure 7-32 Financial Elements, Operators, and Evaluation Expression

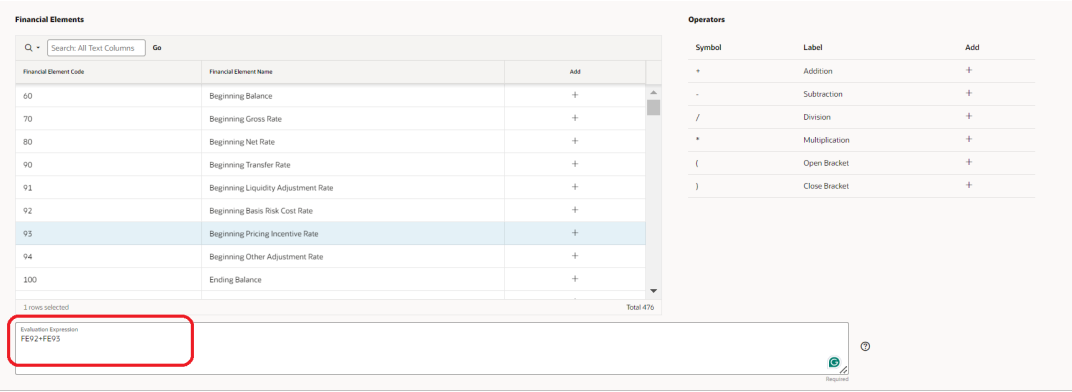

Evaluation Expression is the box where you create the calculation using Financial Elements and mathematical operators.

You can refer to the **Help** button support with the Instructions on how to configure the metric.

Figure 7-33 Evaluation Expression Help button

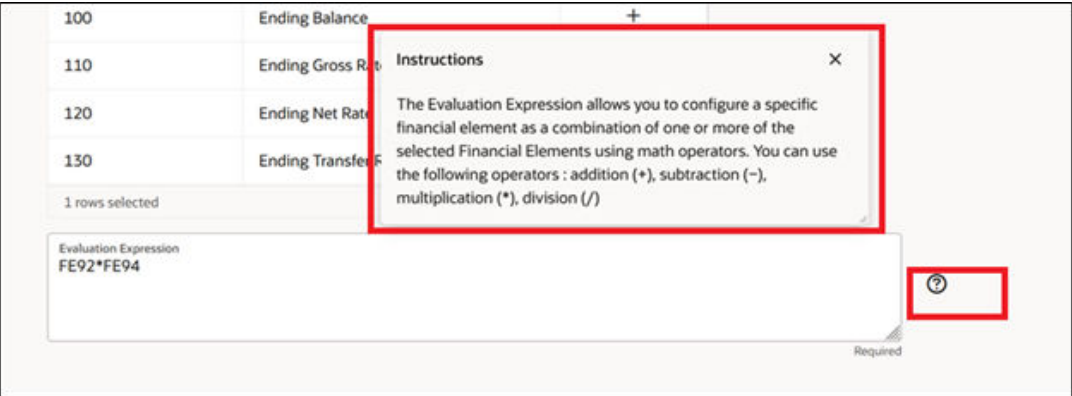

4. Click **Save**.


Creating a New Instrument Metric

The process to create a new Instrument Metric from the portfolio tables is very similar to that of creating a New Management Ledger Metric.

To create a New Instrument Metric:


1. Click **New Instrument Metric** on the Summary screen.

Figure 7-34 New Instrument Metric




This will take you to the next screen to define the custom metric and input the evaluation expression.

Figure 7-35 Add Instrument Metric

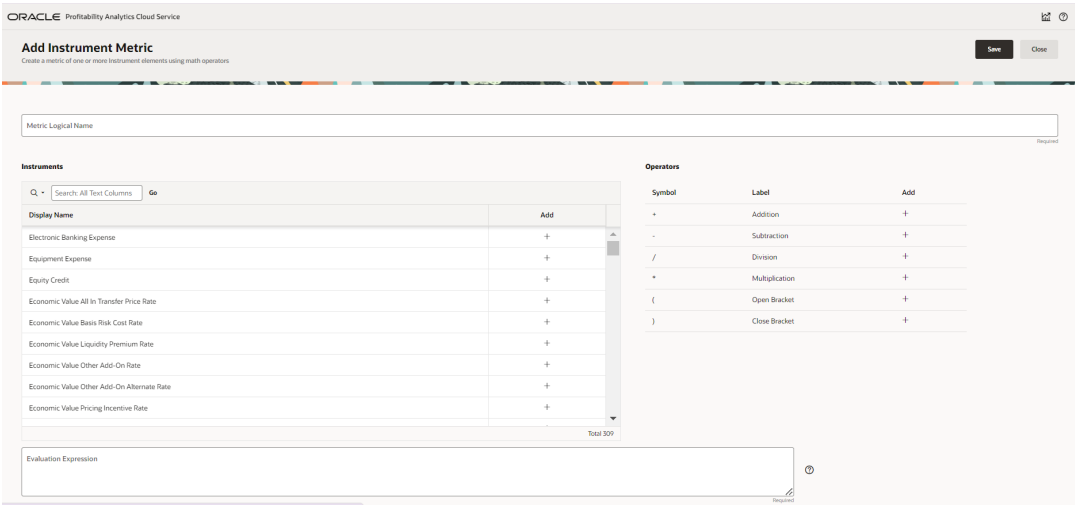

2. Enter the **Metric Logical Name**.
3. Select any one of the following details:
 - Instruments
 - Evaluation Expression
 - Operator

Figure 7-36 Instrument Metric Selection

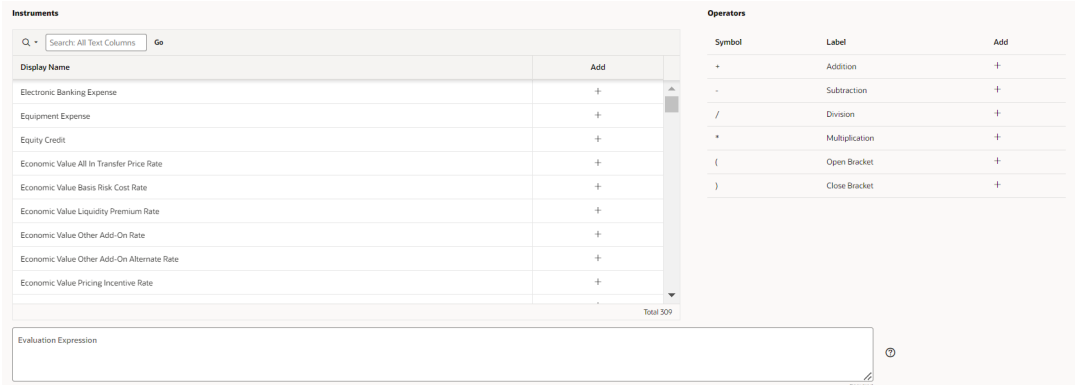

Evaluation Expression is the box where you create the calculation using Instruments and mathematical operators.

You can refer to the **Help** button support with the Instructions on how to configure the metric.

4. Click **Save**.

Machine Learning Churn Model Properties

Customer retention is a key driver of profitability in the banking sector. The ability to accurately identify customers at risk of attrition enables the bank to implement timely and targeted retention strategies, such as offering incentives or personalized services, to preserve high-value customer relationships. At the same time, incorrectly identifying customers as churn risks can lead to unnecessary marketing costs and inefficient use of resources.

To address this, a machine learning–based solution is introduced to improve the accuracy of churn prediction. The model is trained on a newly created, high-quality banking dataset, with the aim of enabling better decision-making, optimizing retention efforts, and ultimately supporting revenue growth.

ML Model Properties

Use this page to view and manage configuration properties associated with machine-learning model detecting customer churn.

Figure 7-37 ML Model Properties

ML Model Properties				
Q	Search: All Text Columns	Go	Actions	Edit Save
				Reset
☐		Property Code	Property Name	Property Value
☒		CHANNEL_ML_MAPPING	ATM	120
☐		CHANNEL_ML_MAPPING	BRANCH	130
☐		CHANNEL_ML_MAPPING	ONLINE	110
☐		CHANNEL_ML_MAPPING	TELEPHONE	100
☐		DEFAULT_SEGMENT_TYPE	SEGMENT_TYPE_ID	SEGM_TYPE_0002
☐		PRODUCT_ML_MAPPING	ADJUSTABLEMORTGAGE	-999
☐		PRODUCT_ML_MAPPING	AUTOLOAN	1102
☐		PRODUCT_ML_MAPPING	BANKGUARANTEE	000
1 rows selected				Total 19

To configure the properties, perform the following steps:

1. From the LHS Menu, navigate to **Maintenance** , and select **ML Model Properties** to view the ML properties table .

Table 7-3 Property Code Details

Property Code	Property Code Description	Property Name
CHANNEL_ML_MAPPING	This property maps the transaction channels (for example, Online, ATM, Branch) to corresponding Channel Numeric Identifier(s) in Channel Dimension.	• BRANCH • ATM • ONLINE • TELEPHONE
PRODUCT_ML_MAPPING	This property maps the products (for example, Auto Loan, Personal Loan, CASA) to corresponding Product Numeric Identifier(s) in Product Dimension.	• AUTOLOAN • PERSONALLOAN • STUDENTLOAN • OFFSETMORTGAGE • FIXEDMORTGAGE • ADJUSTABLEMORTGAGE • CREDITCARD • CURRENTACCOUNT • REGULARSAVINGS • TERMDEPOSIT • STUDENTSAVINGS • BANKGUARANTEE
DEFAULT_SEGMENT_TYPE	This property sets the default segment type to be used for populating the churn model dataset.	SEGMENT_TYPE_ID

2. The table lists all defined ML model properties with the following columns:

- **Select:** Checkbox to select one or more rows.
- **Reorder:** Drag handle to change row order.
- **Property Code:** Logical grouping of the property (for example, CHANNEL_ML_MAPPING, PRODUCT_ML_MAPPING).
- **Property Name:** Specific attribute within the property code (for example, ATM, BRANCH, ONLINE).
- **Property Value:** Assigned value for the property.
The Property Value field is the only editable column in the ML Model Properties table. Enter a property value that corresponds to the associated Property Code and Property Name.

Note

Enter -999 if a property code is not applicable.

3. Use the Actions panel to configure and manage the data displayed in the table. The panel provides the following options:

- **Columns:** Show or hide table columns and adjust their display order.
- **Filter:** Filter the dataset based on row and column properties
- **Data:** Use the Data menu to manage and update the dataset displayed in the table using the following options:
 - **Refresh:** Reload the data to display the most current information.
 - **Flashback:** View data as it existed at a specified time in the past.

- **Selection:** Use the Selection menu to perform actions on selected rows or columns using the following options:
 - **Cell Selection (F8):** Enable cell-level selection or row-level selection based on your preference.
 - **Copy to Clipboard (Ctrl+C):** Copy the selected data to the clipboard.
 - **Refresh Rows:** Reload the selected rows to display the most current data.
 - **Revert Changes:** Undo unsaved changes for the selected rows. This option is available only when changes exist.
 - **Copy Down:** Copy the value from the selected cell to other cells below.
 - **Fill:** Populate selected rows with a value.
 - **Clear:** Remove values from the selected cells.
 - **Format:** Use the Format menu to modify the visual presentation of data using the following options:
 - **Control Break:** Define grouping of table data based on a selected column
 - **Highlight:** Highlight row or column based on defined conditions.
 - **Stretch Column Widths:** Manually adjust column widths to fit the available screen space.
 - **Chart:** Use the **Chart** menu to create a visual representation of the current dataset.
 - **Report:** Generate a formatted report based on the displayed data.
 - **Download:** Export the data for offline use in supported file formats.
4. Click **Save** to confirm the changes or click **Reset** to reset the custom configuration.

8

Operations and Processes

This chapter covers the following topics:

1. [Scheduler Services](#): The Scheduler Service is a service that automates behind-the-scenes work that is necessary to sustain various enterprise applications and functionalities. This automation helps the applications to control unattended background jobs program execution.
2. [Object Migration](#): Object Migration is the process of defining, exporting and importing objects across environments (prod and non-prod)/instances. This feature also facilitates to migrate within the same setup or different setups.
3. [Changing Object Ownership](#): This topic lists the instructions to request the change of object ownership.

Scheduler Services

Scheduler Services automates behind-the-scenes work that is necessary to sustain various enterprise applications and their operations. Using Scheduler Services, applications can control unattended background jobs program execution.

The Scheduler Services screen provides a one-click navigation for each of the operations, at the bottom of the screen, allowing you to move seamlessly between each operation.

Scheduler Services Operations

- [Define Batch](#) - A Batch contains a group of background tasks that are executed together, on a specific date and time during which the resources are available for batch processing.
- [Define Task](#) - A batch job is a piece of a program meant to meet specific and business-critical functions. The program is a REST API used in a batch.
- [Schedule Batch](#) - Schedule batch jobs, to automate tasks that are processed on a regular basis but do not need to occur during the day or require human intervention. Jobs that happen on a regular basis are incorporated into batch schedules. You can also edit pre-conditions for batch group execution and pause scheduled executions.
- [Monitor Batch](#) - Track and access the real-time feedback on the status of the current encoding job and lists the jobs pending in the batch. You can also **Cancel** or **Restart** the service when required.
- [Scheduler Service Dashboard](#) - The Scheduler Service Dashboard gives the complete status of the Executed Runs, Successful Runs, Failed Runs, Ongoing Runs, Interrupted Runs, and the Upcoming Runs.

Accessing Scheduler Services

Using the Scheduler Services, you can create and execute batches and schedules to run various tasks and also monitor them.

To access Scheduler Services:

- Log in to the Service Console and from the left navigation pane in the Service console, click **Operations and Processes > Scheduler**.

User Roles and Functions

You require specific user roles and functions, to use Scheduler Services, and to create and manage batches and tasks.

Scheduler Service Dashboard

View the task executions based on the execution status in the Scheduler Service Dashboard.

You can access the following details related to batch/batch group execution from the Dashboard:

- The batches/batch groups are categorized based on their execution status - **Executed Runs, Successful Runs, Failed Runs, Ongoing Runs, Interrupted Runs, and Upcoming Runs** tabs. Click the respective tab to view the details of the batches/batch groups based on their execution status. For example, click **Ongoing Runs** to view the details of the batches that are currently running.
- The run time, schedule name and the MISDATE associated with each batch/batch group.
- The batch execution summary for all the batches executed in the last 7, 30 and 120 days. The summary is displayed in the form of a color-coded bar graph with legend for the various execution statuses.
- To view the list of all task executions associated with a specific batch/batch group, select the required execution status tab, select Batch/Batch Group and select the required batch/batch group.
- To view the task executions within a specific date range, select the required execution status tab, select Batch/Batch Group and select the required batch/batch group. Specify both the start and end dates.

Click the green navigation icon for a batch or batch group to open the Monitor screen and proceed as needed. The execution details are pre-populated for the selected batch/batch group execution.

Define Batch

You can use batch and batch groups to group a set of background tasks to be executed together.

A Batch contains a group of background tasks that are executed together, on a specific date and time during which the resources are available for batch processing.

Batch Groups consist of batches that need to be executed together. Batch groups help to process date and time-based background tasks based on a defined period when resources are available for batch processing.

To access the list of existing batches and batch groups click **Batch** or **Batch Group** tab respectively. You can also view following details related to each batch/batch group.

- **Batch ID** - The unique alphanumeric code assigned to a specific batch/batch group.
- **Name** - The unique batch/batch group name.
- **Description** - The brief description of the batch/batch group.
- **Last Modified** - The last modified By user, date and time details.

To search for a specific batch/batch group, enter the keywords in the **Search** field and click **Search**. You can search based on **Name**, **Code**, and **Description**. You can also sort the batch/batch group list based on **Code**, **Name**, **Created Date**, **Last Modified Date**, and **Pinned**.

On the **Define Batch**, click the green navigation icon next to the batch or batch group for which you want to create a task or schedule batch execution, then select the required option. The relevant UI appears pre-populated with batch or batch group details. Proceed as needed.

Perform one of the following operations, to manage batch/batch group, from the **Scheduler Service (Define Batch)** page.

- [Create New Batch/Batch Group](#)
- [Edit a Batch/Batch Group](#)
- [Copy a Batch/Batch Group](#)
- [Delete a Batch/Batch Group](#)
- [Pin/Unpin a Batch/Batch Group](#)

Creating a Batch/Batch Group

Create a batch/batch group, to execute a group of background tasks together, on a specific date and time, when the resources are available for batch processing.

To create a batch/batch group from the **Scheduler Service (Define Batch)**:

1. In the **Create Batch** page, enter the following **Batch Details**:
 - **Code** - Enter a unique alphanumeric code for the new batch/batch group. The code must start with alphabets, should not contain any spaces, and must not exceed 60 characters. Special characters are not allowed except **underscore (_)**.
 - **Name** - Enter a unique name for the new batch/batch group. The name should start with alphabets, should not contain any spaces, and must not exceed 60 characters. Special characters are not allowed except **underscore (_)**.
 - **Description** - The description/details for the batch/batch group. The description should start with an alphabet and must not exceed 250 characters.
 - Select **Batch** to create a new batch or **Batch Group** to create a new batch group.
 - For new batch groups, select the **Batches** to be added to the batch group.
 - Select the **Service URL name** from the drop-down list, if it is available. To add a new service URL, enter a name to identify the new Service URL Name and enter the proper Service URL. You can give partial URL here and the complete URL in the Task Service URL.
 - Enter the complete **Cleanup URL** and enable the check box, to activate the cleanup URL, before you [initiate a batch/batch group restart](#). The complete Cleanup URL : `http://fccm-utility-service:8080//fccm-utility-service/cleanupExecutionWatcher`
 - **Pin Batch/Pin Batch Group**: Use this option to pin the batch or batch group to keep it at the top of the list for quick access. For information, see [Pinning/Unpinning a Batch/Batch Group](#).
 - Select one of the following options, to get an email notification, based on the selected batch execution status. Based on the selected option, an email is sent to the email ID of the logged in user, mentioned in the IAM console.

- **Every Time** : An e-mail is triggered irrespective of the batch execution status.
- **Never** : No e-mail will be triggered.
- **On Error only** : (Default). An e-mail is triggered only when the batch execution has failed.
- **On Interrupt only** : An e-mail is triggered if the batch execution is successfully interrupted.
- The system automatically sends an email to all users assigned to the BATCH_NOTIFY_FUNT function and the BATCH_NOTIFY_ROLE role, except for users who have selected the "Never" notification option. If a batch is mapped to a user (and their email ID), the batch email notifications will be sent only to that configured batch user. If no batch user is configured, the system follows the default email notification process.

Note

You can perform the batch-to-user configuration on the [Batch to User Configuration](#) page.

2. For new batches, after entering the Batch Details, provide the following batch parameters.

From the **Batch Parameters** pane, click **Add** to add a new batch parameter, in the following format.

- **Parameter Name** - A valid parameter name for the new Batch parameter.
- **Parameter Value** - A valid parameter value required for Batch execution.

Note

Enclose the parameter Value for a Run time with \$ symbol. For example, \$paramName\$.

By default, \$FICMISDATES\$ and \$BATCHRUNID\$ are added as batch Parameters.

By default, \$BATCHDATES\$, \$BATCHRUNID\$ and \$RUNSKEY\$ are added as batch Parameters.

Note

\$RUNSKEY\$ parameter is added only if you are creating a new batch or copying from an existing batch. It is not supported for existing batches.

To delete a batch parameter, click **Delete** next to that parameter details.

3. Enter the following **Header Parameter** details:
 - **Parameter Name** - A valid parameter name for the new header parameter.
 - **Parameter Value** - A valid parameter value required for batch execution.
4. Click **Save**. The new batch/batch group is created and displayed in the **Scheduler Services (Define Batch)** page.

To view the dependent tasks and their components, click the **Dependency Check** icon. Upon clicking this icon, the **Object Dependency** window appears and displays the following:

- Higher Order Dependencies – Components/batch group that the selected batch depends on. Example: Batch in a batch group will have Batch group as the higher order dependency.
- Lower Order Dependencies – Any task which is created under a batch and the dependency is established will be shown under this tab.

Editing a Batch/Batch Group

Edit the batch/batch group details such as **Description** and also add new **Batch Parameters** to a batch, along with adding new **batches** to the batch group.

Seeded batches cannot be edited.

To modify a batch/batch group:

1. In the **Scheduler Services (Define Batch)** page, click the three-dot menu corresponding to the batch/batch group you want to modify and select **Edit Batch/Edit Batch Group**.
2. Modify the required [details](#), in the **Edit Batch** page.
3. Click **Save** to save the edited batch/batch group.

The edited batch will be updated in the **Scheduler Services (Define Batch)** page.

You can pin a particular batch/batch group by selecting the **Pin** option from the three-dot menu of each batch/batch group. For information, see [Pinning/Unpinning a Batch/Batch Group](#). To unpin a batch/batch group, click the three-dot menu corresponding to the pinned batch/batch group and select **Unpin Batch/Unpin Batch Group**.

Copying a Batch/Batch Group

Copy a batch/batch group that you want to clone to create a new batch/batch group.

To copy a batch/batch group:

1. In the **Scheduler Services (Define Batch)** page, click the three-dot menu corresponding to the batch/batch group that you want to copy and select **Copy Batch/Copy Batch Group**.
2. In the **Copy Batch** page, modify the required [Batch details](#) to create a new batch/batch group.
3. Click **Save** to add the copied batch to the **Scheduler Services (Define Batch)** page.

Deleting a Batch/Batch Group

Delete a batch/batch group that is no longer required in the system from the Define Batch page.

Note

You cannot delete seeded batches.

To delete a batch/batch group:

1. From the **Scheduler Services (Define Batch)** page, click the three-dot menu corresponding to the batch/batch group you want to delete and select **Delete Batch/Delete Batch Group**.
2. Click **OK** to confirm deletion.

Note

After confirmation, any active schedules associated with the batch will also be deleted.

Pinning/Unpinning a Batch/Batch Group

Use the pinning option to pin a batch/batch group to keep it at the top of the list for quick access, on the **Scheduler Services (Define Batch)** page.

By default, the Batch and Batch Group drop-down lists are sorted such that:

- Pinned objects specific to the logged-in user appear first. Objects pinned by the logged in user appear at the top.
- These are followed by non-pinned objects.
- Within each group (pinned and non-pinned), objects are sorted in ascending alphabetic order.

To pin a batch/batch group:

1. To pin a record: In the **Scheduler Services (Define Batch)** page, click the three-dot menu corresponding to the batch/batch group you want to pin and select **Pin Batch/Pin Batch Group**.
2. To unpin a pinned record: In the **Scheduler Services (Define Batch)** page, click the three-dot menu corresponding to the batch/batch group you want to unpin and select **Unpin Batch/Unpin Batch Group**.

Define Tasks

The Define Tasks page lists tasks associated with a specific Batch Definition. You can create new tasks, and edit or delete existing tasks.

To access the **Define Task** page:

- Select Batch/Batch Group from the drop-down list and select the particular batch/batch group to access the list of tasks associated with it.

You can view the following details related to each task:

- **Task ID** - The unique identifier for the task.
- **Name** - The name of the task..
- **Parent Task** - The parent task associated with the task.
- **Component** - The seeded/custom component associated with the task.
- **Created Date** - The task creation date.
- **Last Modified** - The last modification date.

To search for a specific task, enter the keywords in the **Search** field and click **Search**. You can search based on the **Task Name**, **Code** and **Description**. You can also sort the Task

list based on **Code**, **Name**, **Precedence**, **Component**, **Created Date**, and **Last Modified Date**.

Using the **Preview** option, you can view the complete task execution sequence for a specific batch/batch group.

On the **Define Task** page, select the required batch or batch group and proceed as needed. From the **Actions** menu, you can select **Schedule** to navigate to the **Schedule Batch** screen. The **Schedule Batch** screen appears with pre-populated data related to the selected batch/batch group.

Perform the following operations to manage a Task, from the **Scheduler Service (Define Task)** page.

- [Add a task](#)
- [Modify a task](#)
- [Define a task precedence](#)
- [Delete a task](#)

Adding a Task

Add new tasks to a selected Batch Definition.

To add new task:

1. In the **Scheduler Service (Define Task)**, select the Batch for which you want to add a new task from the drop-down list.
2. Enter the following details:
 - **Task Code** - Enter a unique alphanumeric code for the new task. The code must begin with letters, should not include spaces, and has a maximum limit of 60 characters. Special characters except **underscore (_)** are not allowed.
 - **Task Name** - Enter a unique name for the new task. The name should start with letters, not contain spaces, and have a maximum limit of 60 characters. Special characters except **underscore (_)** are not allowed.
 - **Task Description** - The description/details for the task. The description should begin with a letter and not exceed 250 characters. Avoid using phrases like "Select From" or "Delete From" in the description.
 - **Task Type** - Select the task type from the drop-down list.
 - **Component** - Select the custom or the seeded component associated with the task.
3. By default, all Batch Level Parameters are added and enabled as task parameters in the **Task Parameters** pane.

Note

You can edit the parameters only for custom components.

- a. Enter the Parameter name in the **Param Name** field.
- b. Enter the Parameter value in the **Param Value** field.
- c. For FTP Propagation or Advanced FTP Propagation components, select the **Execution Mode** from the drop-down list:

- **Single Query Approach:** Select this option to process small or medium-sized datasets (less than 500,000 records). This mode provides faster execution with minimal overhead and is suitable for manageable data volumes.
- **Sliced Queries Approach:** Select this option for very large datasets (500,000 records or more) that might cause memory or performance issues if processed in a single query. This mode divides the dataset into smaller slices, improving query execution performance and reducing overall processing time.

To delete a parameter, click on **Delete** next to the respective parameter.

Note

Legal Entity and Scenario Parameters for Allocation Engine and Allocation Model Engine Components

For tasks using the Allocation Engine or Allocation Model Engine components, two additional task parameters are available:

- **Legal Entity** — A dropdown listing all leaf members of the Legal Entity dimension.
- **Scenario** — A dropdown listing all leaf members of the Scenario (Consolidation Code) dimension.

Providing a value for these parameters is not mandatory in the task-parameter screen. However, their requirement at runtime is conditional on the rules being executed:

- These parameters apply only to rules defined as LE Variable and/or Scenario Variable respectively. Rules not defined as such will ignore these values and execute using the dimension values specified in their rule metadata.
- If any rule being executed is defined as **LE Variable**, a value for Legal Entity must be provided. If left blank, rule execution will fail with an appropriate log message.
- If any rule being executed is defined as **Scenario Variable**, a value for Scenario must be provided. If left blank, rule execution will fail with an appropriate log message.
- Batches created in prior releases that do not include these parameters in their JSON will continue to execute without issue — the batch component handles the absence of these parameters gracefully for backward compatibility.

4. Click **Save** to add the new task to task summary in the **Define Task** page.

Note

Sync task will remain active if execution time is more than 15 minutes at target service and till acknowledge status is generated from target API after the execution.

Modifying a Task

Modify details such as Task Description and Task Type in existing tasks.

You can also add a new task parameter and enable or disable existing task parameters.

To modify a task:

1. From the **Define Task** page, select the Batch to modify the task details from the drop-down list.
2. Click **Edit** corresponding to the Task you want to modify.
3. Modify the required Task Details, in the **Edit Task** page.
4. Click **Save** to update the changes.

The modified task is added to the **Define Task** page.

Define Task Precedence

Task Precedence indicates the execution-flow of a batch. Task Precedence Value helps to determine the order in which the specific tasks of a batch are executed.

For example, consider a Batch consisting of four tasks. The first three tasks lack define precedence and hence will be executed simultaneously during batch execution. However, Task 4 has a precedence value as Task 1, indicating that Task 4 is executed only after the successful completion of Task 1.

You can set Task Precedence between Tasks or define to run a Task after a set of other tasks. While, multiple tasks can be executed simultaneously, cyclical execution is not permitted. Tasks without defined precedence execute immediately upon Batch Execution.

Note

The **Task Precedence** option is disabled if a batch has only one associated task.

To define task precedence:

1. Click **Add or Remove Precedence** corresponding to the task requiring precedence, to access the **Precedence Mapping** list.
 - a. Select a batch to execute before the current task, from the **Available Tasks** pane and click **Move Selected**.
To move all the batches, click **Move All**.
 - b. To remove a batch from the task precedence sequence, select the task from the **Selected Tasks** pane and click **Remove**.
To remove all the selected batches, click **Remove All**.
2. Click **Save** to update Task Precedence in the batches.
3. Click **Preview** to view the precedence information.

Deleting a Task

Remove any tasks that are no longer required in the system, from a Batch Definition.

To delete a task:

1. From the **Define Task** page, select the Batch from the drop-down list.
2. Click **Delete** corresponding to the Task you want to delete.
3. Click **OK** in the confirmation dialog to confirm deletion.

Schedule Batch

Schedule Batch enables users to manage batch/batch group executions.

All the batch/batch group schedules are listed. You can sort this list based on code, name, Pinned, Task Precedence, Components, and dates, to access a specific schedule.

On the **Schedule Batch** page, select the required batch or batch group and proceed as needed. When you execute/restart/rerun a batch/batch group, a dialog box appears providing you an option to navigate to the **Monitor Batch** screen.

From the **Schedule Batch** page, you can perform the following operations related to the execution and scheduling of batches/batch groups

- [Execute batch/batch groups instantaneously](#)
- [Edit dynamic parameters](#)
- [Automate batch/batch group executions using the various scheduling options](#)
- [Re-run a batch/batch group execution](#)
- [Re-start a batch/batch group execution](#)

Execute Batch/Batch Group

Use the Execute Batch to run a batch/batch group instantaneously.

To execute a Batch/Batch Group:

1. In the **Schedule Batch** page, select **Batch** or **Batch Group** to execute from the drop-down list.
2. Select the **Batch /Batch Group** for execution.
3. Click **Execute** to access the **Execution Schedule** page.
4. Click **Exclude Tasks** to add/remove tasks from the execution list.
5. Click **Hold Tasks** to pause/release tasks during execution.
6. Click **Edit Dynamic Parameters** to [modify the dynamic parameters](#).
7. Click **Execute**.

The Batch is executed, and the associated unique Run ID is displayed in the format <BATCH_CODE>_<MIS_DATE>_<ITERATION-COUNT>.

You can always click preview to view the PMF process sequence used to execute the selected batch/batchgroup.

Adding Pre-Conditions For Batch Group Execution

Pre-conditions help to execute batches associated with a batch group, on specific days, based on the set frequency and selected days.

You can set pre-conditions for a batch group, to execute specific batches on selected days based on the set frequency interval. This enables to wisely use the available resources for execution.

To set pre-conditions for batch group execution:

1. Click **Schedule** from the Header panel.
2. In the **Schedule Batch** page, select **Batch Group** and the **Batch Group Name**.

3. Click **Pre-Conditions** to set the pre-conditions for task execution.
4. Select the **Batch** to set the pre-condition.
5. Set the execution frequency to Weekly, Monthly, or specific interval and set one of the following conditions:
 - **Weekly** - Select the weekdays to execute the batch. You can select multiple days.
 - **Monthly** - Select the days of the month to execute the batch. You can select multiple days.
 - **Interval** - Select the recurrence frequency to execute the batch.
6. Click **Add** to add another pre-condition.
7. After adding all the required pre-conditions, Click **Save**.

The pre-conditions are saved and the batch group will be executed based on the set pre-conditions.

 Note

The batch group is always get executed based on the pre-condition and any schedule associated with the batch group will not be considered for processing.

Edit Dynamic Parameters

Modify the dynamic parameters set for a batch/batch group.

You can modify the batch parameters, batch header parameters, task parameters, and the task header parameters associated with a batch/batch group.

You can save your custom settings for future use by checking the "Remember my saved preference" option. When you execute a batch, your saved preferences will be used for that batch and its tasks. When you migrate a batch, your preferences will also be migrated. When you save your preferences:

- Copying a batch or task will also copy the preferences.
- Deleting a batch or task will also delete the preferences.

To edit the dynamic parameters from the **Schedule Batch** page:

1. Select **Batch/Batch group** and then select the specific batch/batch group.
2. Click **Edit Parameters** to access the **Edit Dynamic Params** page.

You can also edit the dynamic parameters while configuring the scheduling options.

3. Click the batch/batch group name to access all the parameters.
4. Set the **\$BatchDate\$** to set the batch execution date: :
 - Set the batch date to SYSDATE (system date). The batch execution date is set to SYSDATE by default.
 - Toggle and select **MISDATE** to select a particular batch execution date.

Note

All dates used in scheduling logic, including the MISDATE field, are consistently stored and processed in UTC (Coordinated Universal Time). This design ensures that scheduled batch executions and system date calculations remain standardized across all regions, eliminating discrepancies caused by local time zones. The MISDATE represents the scheduled date of a batch as stored in UTC. It does not adjust based on the user's local time zone. The SYSDATE function always reflects the current date and time in UTC when used for scheduling logic.

Example: If a customer in Singapore (UTC+8) schedules a batch for March 16th at 02:00 AM local time, the system automatically converts and stores it as March 15th, 18:00 UTC. When any user views the MISDATE field for this batch, it will display 2024-03-15 (the UTC date stored).

Similarly, the SYSDATE value is based on the current UTC date and time, ensuring all scheduling logic is aligned with the UTC standard. As a result, while the user schedules the batch for March 16th in their local time zone, the system consistently operates on the equivalent UTC date, maintaining uniformity across all locations.

5. Enter **\$BATCHRUNIDS** to set the batch run ID in the format: `<BATCH_CODE>_<MIS_DATE>_<ITERATION-COUNT>`.
6. Edit the batch header parameters and the task parameters.
7. Click **Save** to update the batch/batch group parameter values.
8. After updating the changes, execute the batch/batch group or configure the scheduling settings.

Scheduling and Automating Batch/Batch Group Execution

Automate batch/batch group execution.

Using the various scheduling options, you can automate batch/batch group execution to run based on the specified scheduling parameters.

To automate batch/batch execution:

1. Click **Schedule** from the Header panel.
2. In the **Schedule Batch** page, select from the following options:
 - **Once** - Run only once.
 - **Daily** - Run daily.
 - **Weekly** - Run weekly on selected days and time.
 - **Monthly** - Run monthly on selected days and time.
 - **Quarter** -Run every quarter on selected days and time.
 - **Cron Expression** - A Cron Expression is a string comprising of six or seven fields separated by white space. Fields can contain any of the allowed values, along with various combinations of the allowed special characters for that field.
To execute a batch/batch group using a Cron expression, enter the Cron Expression for your schedule. For more information about the Cron Expression, click **Information** next to the Cron Expression field.
 - **Custom Schedule** - Create a custom schedule to execute a batch based on predefined rules. To create a custom schedule:

- a. Click Add (green plus sign). The **Custom Schedule** dialog appears providing a summary of existing custom schedules.
- b. Click **Add** and provide the following details.
- c. **Batch/Batch Group** - Batch/batch group for execution.
- d. **Name** - The specific batch/batch group to be executed.
- e. **Rule Name** - The rule to run on this batch/batch group.
- f. **Priority**- The priority to be associated with the execution.
- g. **Exception Policy** - The exception (Prepone, Postpone, None).
- h. Click the green + icon to create the custom schedule.

You can perform the following actions on each custom schedule:

- Edit Parameter: Edit the dynamic parameters.
- Exclude Jobs: Exclude the job during execution.
- Hold Jobs: Hold the job during execution.
- Preview: Preview the job.
- Delete: Delete the selected batch/batch group during the schedule creation.

Note

You cannot import/export custom schedules.

3. Enter the following generic information and the parameters:
 - **Batch/Batch Group** - Batch/batch group for execution.
 - **Batch/Batch Group Name** - The specific batch/batch group to be executed.
 - **Schedule Name** - The unique schedule name.
4. Provide the following scheduling parameters based on the selected schedule option.
For Cron Expression based scheduling, enter the required Cron expression.

Table 8-1 Scheduling Options

Details	Once	Daily	Weekly	Monthly	Quarter
Start Date to begin execution.	Yes	Yes	Yes	Yes	Yes
End Date to stop the execution	No	Yes	Yes	Yes	Yes
Run Time to execute the batch/ batch group	Yes	Yes	Yes	Yes	Yes
Days of the week you want to execute the batch/batch group. You can select multiple days.			Yes	Yes	Yes
Months of the Year you want to execute the batch/batch group. You can select multiple months.				Yes	Yes
Day of the Month to execute batch/batch group				Yes	Yes

Table 8-1 (Cont.) Scheduling Options

Details	Once	Daily	Weekly	Monthly	Quarter
First Months of the Year to calculate the year beginning and each quarter beginning.					Yes
Select Quarters to execute batch/batch group You can select multiple quarters.					Yes
Days of Quarter - Select the days to execute the batch/batch group. You can select first day, mid day, last day, First N days, or last N days					Yes
No. of Days - If you select first N days or last N days, select the number of days to execute the batch/batch group at the beginning or end of the selected quarter					Yes

Note

All dates used in scheduling logic, including the MISDATE field, are consistently stored and processed in UTC (Coordinated Universal Time). This design ensures that scheduled batch executions and system date calculations remain standardized across all regions, eliminating discrepancies caused by local time zones. The MISDATE represents the scheduled date of a batch as stored in UTC. It does not adjust based on the user's local time zone. The SYSDATE function always reflects the current date and time in UTC when used for scheduling logic.

Example: If a customer in Singapore (UTC+8) schedules a batch for March 16th at 02:00 AM local time, the system automatically converts and stores it as March 15th, 18:00 UTC. When any user views the MISDATE field for this batch, it will display 2024-03-15 (the UTC date stored).

Similarly, the SYSDATE value is based on the current UTC date and time, ensuring all scheduling logic is aligned with the UTC standard. As a result, while the user schedules the batch for March 16th in their local time zone, the system consistently operates on the equivalent UTC date, maintaining uniformity across all locations.

5. **Exclude Tasks** to add/remove tasks from the execution list.
6. **Hold Tasks** to pause/release tasks during execution.
7. Click **Edit Dynamic Parameters** to modify the dynamic parameters.
8. Click **Schedule** to add the new schedule for execution.

You can [set pre-conditions](#) to process batch groups. When a batch group has an associated pre-condition, the execution schedule will not be considered for processing.

9. To manage schedules associated with a specific batch:
 - a. In the **Select Batch** page, select **Batch** and select the **Batch Name** to view the associated schedules.
 - b. Click **View Schedule** to access the list of all the schedules associated with the batch.

You can perform the following tasks:

- Click **Edit** to modify the schedule.
- Click **Pause** and enter the **Start Date** and **End Date** to pause the schedule from execution. Click **Add** to apply the pause.
To remove the pause, click **Delete** next to the specific pause.

Re-run Batch/Batch Group

Re-running a batch/batch group facilitates you to run the batch/batch group irrespective of the previous execution state.

When you re-run a batch/batch group that has been previously executed, a new Run ID is generated, and the batch/batch group is executed as if it were a new run.

To re-run a batch::

1. Click **Schedule Batch** from the Header panel.
2. In the **Schedule Batch** page, select the **Re-run** tab.
3. Select **Batch/Batch Group**.
4. Select the **Batch or Batch group Name** you want to re-run.
5. Select the **Batch Run ID**.
6. Click **Re-run**.

Re-start Batch/Batch Group

Re-start a batch/batch group that has not executed successfully or has been explicitly interrupted, canceled, or put on hold during the execution process.

Restarting a batch/batch group enables you to continue execution directly from the point of interruption or failure, allowing you to complete executing the remaining tasks.

Note

Before restarting a batch/batch group, ensure to provide the [complete cleanup URL](#) and also to enable invoking the cleanup URL before restarting the execution.

To re-start a batch/batch group:

1. Click **Schedule Batch** from the Header panel.
2. From the **Schedule Batch** page, select the **Re-start** tab.
3. Select **Batch/Batch Group**.
4. Select the **Batch or Batch group** you want to schedule daily from the drop-down list.
5. Select the **Batch Run ID**.
6. Click **Re-start**.

Monitor Batch/Batch Group

Using Monitor Batch/Batch Group, you can view the status of executed batches/batch groups, along with the tasks details.

Monitoring enables users to track and identify issues at regular intervals, ensuring smoother batch execution. Both a visual representation and a tabular view of the status of each task in the batch are available.

On the **Monitor Batch** screen, select the required batch or batch group and proceed as needed. From the **Actions** menu, you can select **Restart/Rerun** to navigate to the **Schedule Batch** screen with pre-populated data related to the selected batch/batch group.

To monitor a batch/batch group:

1. Click **Monitor Batch** from the Header panel.
2. Select the **Batch/Batch Group** and the **Batch/Batch Group Name** to monitor the execution.
3. **Set Refresh Frequency Time Interval and duration** in seconds.

By default, the refresh interval is set to **5 seconds** and duration is set to **5 minutes**. This indicates that the monitor progress will be refreshed every 5 seconds for the next 5 minutes.

The refresh interval ranges between 5 to 60 seconds and the duration ranges between 5 to 180 seconds.

4. Select the **MISDATE** to view the list of Batch Run IDs executed on a specific date.
5. Select the **Batch Run ID** you want to monitor.
6. Click **Start Monitor** to view the results in **Visualization** and **List View** tabs.

The **Visualization** tab displays execution status graphically, while the **List View** tab provides the details in a tabular form, including:

- **Status:** Task execution status - **Not-Started**, **On-going**, **Aborted**, **Successful**, **Failed**, **Interrupted**, **Excluded** and **Undefined**.

Note

When the task execution status is **Aborted**, the batch execution will still be **On-going**. The task status will be set to **Ongoing**, when it is triggered again.

To download the Orchestrator LogViewer PDF:

- a. Click **View Execution Logs**.
 - b. In the page that opens, locate the log you want to download and click the **Log Viewer** icon under **Actions**.
 - c. In the Log Viewer page, click the **Details** tab.
 - d. Click the **Download** icon to download the Orchestrator LogViewer PDF.
- **Start Time:** Task execution start time.
 - **End Time:** Task execution end time.

Note

All timestamps displayed in the Log Viewer UI now reflect the timezone configured in the user preferences.

- **Task Details:** Mouse-over the task to display its status and details.
7. At any point, select **Stop Monitor**, to stop monitoring.
You can download the task execution summary in PDF or Excel, with or without the task logs, from the **Monitor Task** page.
 8. (Optional). To rerun, restart, or interrupt execution, click **Actions** and select the required option.
You can also reset the search criteria using **Actions**.
 9. (Optional). Click **View Execution Parameters** adjacent to a batch/batch group, to access the list of tasks and task parameters such as **Runskey ID**, **Misdate**, associated with that batch/batch group.

Scheduler Configuration

Scheduler Configuration UI allows you to manage the scheduler service configuration parameters. It also allows you to map specific user to batch and batchgroups for email notifications.

To access the Scheduler Configuration UI in the Scheduler Service page, follow these steps:

1. Go to the Home page of the application.
2. Navigate to **Batch Administration** in the left Navigation pane.
3. Under **Batch Administration**, click on **Scheduler Configuration**.

Note

Ensure you have the BATCH_ADMIN function code to access the Scheduler Configuration page.

Batch to User Configuration

Batch to User Configuration menu allows you to map users to specific batch/batch group processes. This assignment ensures that emails are sent only to the specific users associated with each batch.

To access the Batch to User Configuration page, select **Batch to User Configuration** in the Scheduler Configuration UI.

Note

Click the **eye** icon on the **Batch to User Configuration** tile to view the page.

To search for a specific batch/batch group, enter the keywords in the Search field and click **Search**. You can search based on Batch Name, Batch Code, and Batch type.

Note

The system automatically sends an email to all users mapped to the BATCH_NOTIFY_FUNT function and BATCH_NOTIFY_ROLE role. If a batch/batch group is mapped to a user (and their email ID), the batch email notifications will be sent only to that configured batch user. If no batch-to-user configuration is provided or updated, email notifications will be sent to users with the above function and role.

Perform the following steps to add specific user(s) to the batch/batch group:

1. In Batch to User Configuration menu, click **Add** to add new batch/batch groups.
2. Select the batch type from the dropdown menu.
3. Select the required batch/batch group from the dropdown menu.
4. Select the required users from the dropdown menu.
5. Click **Create**, the *Batch User mapping is created successfully* message is displayed.

Action menu

Batch to user mapping configuration page lists all the batch/batch groups which are mapped to specific user(s).

1. Select the desired batch/batch group from the Batch to user mapping configuration page. Click **Action Menu** to view, modify, or delete batch/batch groups.
 - a. **View**
Clicking **View** allows users to see detailed information on the batch/batch group user mapping.
 - b. **Edit**
Edit the batch/batch group to user mapping configuration. You can either update the user details or remove the user.
 - c. **Delete**
The **Delete** option allows you to remove the user to batch/batch group mapping from the system.

General Configuration

The **General Configuration menu** allows you to configure the parameters related to a scheduler service.

1. Under **Scheduler Configuration** menu, select **General Configuration**.

Note

Click the **eye** icon on the **General Configuration** tile to view the page.

2. In Scheduler Service General Configuration Screen, click **Edit** to modify the configuration settings.
3. Modify the required details, refer to the **General configuration parameters** table below.

Table 8-2 General configuration parameters

Parameter	Description	Default Value
Enable/disable general email notification	Enable/disable general email notifications to automatically alert users when a batch job is successful, failed, or is interrupted.	Enable
Enable/disable in-app notification	Enable/disable in-app notifications to alert users within the application when a batch job is successful, failed, or is interrupted.	Enable
Enable/disable notification for threshold email	Enable/disable email notifications triggered when a batch execution exceeds its expected execution time threshold. For example, if a batch typically completes in 1 hour but now takes longer, an email is sent as its taking longer than expected time to complete.	Enable
Threshold email time notification percentage criteria	Defines the additional execution time (in percentage) allowed beyond the last successful batch completion time before sending a threshold notification email. For example: If a batch previously completed successfully in 1 hour and the threshold is set to 20%, a threshold notification will be triggered if the batch exceeds 1 hour and 12 minutes (i.e., 60 minutes + 20%). If multiple notifications are allowed (as per the Threshold email Notify Limit), the time for subsequent notifications will be calculated from the last notification time, adding the same threshold percentage again. For instance, the next notification would be triggered after 20% of 72 minutes (i.e., 86.4 minutes), and so on.	20

Table 8-2 (Cont.) General configuration parameters

Parameter	Description	Default Value
Threshold email Notify Limit	Defines the maximum number of email notifications that can be sent when a batch exceeds its execution time threshold during a single run.	5
 Note If general email notification is disabled and only if the threshold email notification is enabled, scheduler sends only the threshold email.		
Batch to User mapping upper limit	Specifies the maximum number of users that can be mapped to a batch/batch group.	10

4. Click **Save** to save the modified configurations.
OR

Click **Cancel** to discard the changes and revert to the previous settings.

Schedule Rule

Use the **Schedule Rule** UI to configure rules that trigger batch execution based on defined conditions.

To schedule a rule:

- Under **Scheduler Configuration** menu, select **Rule Detail**. The **Schedule Rule** UI appears.
- Click **Create**. The **Create Rule** dialog appears.
- Provide rule name and description.
- Select the execution type:
 - Every Day**: Executes the batch every day except holidays. Weekends are by default considered holidays.
 - Specific day/s of the week**: Select the specific day(s) on which the batch should be executed. Also select the recurrence from the **Recur every** drop-down list.

Note

Enable the **Slide Week** option to reorder the weeks if the number of working days in a week is less than or equal to 1 (excluding weekends).

- Specific day/s of the month**: Select the specific date(s) on which the batch should be executed.

- **Last day of the month:** Executes the batch on the last working day of the month.

5. Click **Save**.

To edit a rule:

1. Under Scheduler Configuration menu, select Rule Detail. The Schedule Rule UI appears displaying a list of scheduled rules.
2. Click the Action menu corresponding to the rule you want to edit and select Edit. The Edit Rule dialog appears.
3. Make the required changes and click Update.

To delete a rule:

1. Under **Scheduler Configuration** menu, select **Rule Detail**. The **Schedule Rule** UI appears displaying a list of scheduled rules.
2. Click the Action menu corresponding to the rule you want to delete, select **Delete** and click **Yes** to confirm the deletion.

Appendix A: Understanding Batch Job Scheduling and Daylight Saving Time (DST)

This documentation outlines how Daylight Saving Time (DST) may affect your scheduled batch jobs when using the Europe/London time zone.

Batch Job Scheduling Behavior

When you schedule a batch job in the application interface, you select a Run Time (example: 4:00 AM) in the Europe/London time zone.

- The batch scheduler internally converts this time to UTC behind the scenes at the time of schedule creation.
- Once this UTC time is set, it remains fixed in the schedule.

Observed Impact During DST Transitions

The Europe/London region transitions between standard time and Daylight Saving Time (clocks go forward in March and back in October). Because the job schedule uses a fixed UTC time, the expected local execution time will shift:

- **During standard time (non-DST):** Your job runs at the expected local time (e.g., 4:00 AM local).
- **After DST ends (clocks go back one hour, usually in October):** The same fixed UTC schedule will trigger one hour earlier in local time.

Examples:

Case 1: Batch scheduled in non-DST range

Table 8-3 Scheduling in non-DST range

Phase	Europe/ London Time Zone Status	User Expected Schedule Time	Stored UTC Time	Actual Trigger Time (Europe/ London)	Result
Non-DST	UTC+0	8:30 AM	8:30 AM	8:30 AM	Correct
DST starts	UTC+1	8:30 AM	8:30 AM	9:30 AM (8:30 AM UTC + 1 hr)	1 hour delay

Case 2: Batch scheduled in DST range**Table 8-4 Scheduling in DST range**

Phase	Europe/ London Time Zone Status	User Expected Schedule Time	Stored UTC Time	Actual Trigger Time (Europe/ London)	Result
DST	UTC+1	8:30 AM	7:30 AM	8:30 AM	Correct
Non-DST starts	UTC+0	8:30 AM	7:30 AM	7:30 AM (7:30 AM UTC + 0 hr)	1 hour early

Customer Impact and Action Required

This behavior may cause scheduled operations, reporting, or data integrations to run at unintended times, particularly for UK users.

The current system does not actively recompute and adjust the UTC time when DST changes. Review and adjust your scheduled jobs around DST changes to ensure they continue to run at your desired local time.

Object Migration

Object Migration is the process to define, export and import objects across environments (prod and non-prod)/instances. This feature also facilitates to migrate within the same setup or different setups.

Objects refer to the various metadata definitions defined for various domains. You may want to migrate objects for several reasons such as manage global deployments on multiple environments or to create multiple environments so that you can separate the development, testing, and production processes.

For example, you can use the object migration feature to define PMF process object such as balance computation on your testing environment. After successful testing, you can use this feature to export the object to production/non-production environment.

You can migrate the following object types:

- **Schedule** - Schedule provides the instruction to schedule the execution of defined processes. When a schedule is migrated, the associated batch is also migrated.
- **Batch** - Batch is a group of jobs. When a batch is migrated, the batch and the associated pipeline information are also migrated. Note that the dependent objects used in the batch are not exported. All the objects used in the batch must be present in the target environment before the batch definition is imported.
- **Batch_Group** - A set of individual batches are consolidated to form a single Batch_Group. When we migrate a Batch_Group all the batches, tasks and pipeline information associated with that Batch_Group are also migrated.
- **Pipeline** - A pipeline is an embedded data processing engine that runs inside the application to filter, transform, and migrate data on-the-fly. Pipelines are a set of data processing elements called widgets connected in series, where the output of one widget is the input to the next element.
- **Threshold** - The threshold limit associated with set variables values for scenarios in FCCM Cloud Service. These threshold values are set when scenarios are created or installed and can be changed, if required.

- **Job** - Jobs provide set of instructions to execute Workflow Pipelines, based on the set threshold values.
- **Roles** - Roles are used to map functions to a defined set of groups to ensure user access system security.
- **Groups** - Groups are used to map Roles. Specific User Groups can perform only set of functions associated with that group.
- **CM_ADMIN** - The CM_ADMIN object type refers to all the case management related admin screens. Under this object type, you can export case management related admin metadata and settings for Business Domain, Case Actions/Statuses, Case Priority, Case Rules, Case System Parameters, Case Types, Jurisdictions and Security Mapping.

① Note

System can successfully import any object if both Code/Name do not exist in the target. If either code or name of the object being migrated is already available in target, import will fail.

Even if overwrite option is selected, object will only be overwritten in target if both object code/name matches in target environment.

For example, if an interest rate curve is being migrated, and either code or name is already available in target environment, import will fail.

Migration Object Types

You can create Object Export and Import definitions for the following object types using Object Export/Import feature.

The Migration object types are categorized as follows:

Asset Liability Management

- Standardized_IRRBB_Shock
- Static_deterministic_process
- Time_bucket
- Dynamic_deterministic_process
- Forecast_balances
- Multi_dimensional_balance_sheet
- Pricing_margin
- Product_characteristics
- Behaviour_pattern_rule
- Discount_methods
- Forecast_rates
- Prepayment_model
- Prepayment_rules
- Transferring_Price_Rules

Cash Flow Edits

- Cash_flow_edits_rule
- Cash_flow_edits

Cash Flow Engine

- Cashflow_Process

Common Objects

- Batch

① Note

Ensure to have BATCH_SUMM, BATCH_VIEW and BATCH_ADD rules to view, export and import batches.

- Batch_group

① Note

Ensure to have BATCH_SUMM, BATCH_VIEW and BATCH_ADD rules to view, export and import batches.

- Currency
- Datamodel_extension_dimension
- Data_file_specification
- Dimensions

① Note

Dimension definitions should be migrated before migrating the dependent object definitions. The source and the target dimension of the dependent objects should be the same.

- Expressions
- Filters
- Custom Archives
- Folder
- Hierarchy

① Note

Dimension definitions should be migrated before migrating the Hierarchy associated with it. The Dimension should be the same in both source and target environments.

- Holiday_calendar
- Job
- Pipeline
- Schedule

Note

Ensure to have BATCH_SUMM, BATCH_VIEW and BATCH_ADD files to view, export and import batches.

- Slowly Changing Dimensions
- Dataset
- Export_data

Data Maintenance Interface (DMI)

- Excel Upload
- Data Entry
- Data Exporter

Note

Ensure that the definitions are in **Approved** status before migrating.

Funds Transfer Pricing

- Add-on Rate Rule
- Alternate_Rate_Output_Mapping
- Replicating Portfolio
- Standard_Process

Identity Management

- **Groups** - For more information, refer to [Groups Summary in Admin Console](#).
- **Roles** - For more information, refer to [Roles Summary in Admin Console](#)

Patterns

- Behaviour_pattern
- Payment_pattern
- Reprice_pattern

Profitability Management

- Allocation Model
- Lookup Table
- Allocation Specification

- Static_Table

Profitability Analytics

- Financial Element Mapping
- Segmentation Mapping
- Line Item Display Order
- Geography Mapping

Rate Management

- Interest Rates

Note

While importing, the last executed date is set as Null to support the batch hybrid scheduler to execute the data afresh.

- Economic_indicator
- Volatility_surface

Accessing Object Export and Object Import Features

Using the Object Export and Import features, you can create Export and Import Object definitions.

Business Objects - To access Object Export and Import feature for Business Objects: From the left navigation pane in the PBSM applications console, click **Operations and Processes > Object Administration** and:

- To access Object Export feature, click **Export Object**.
- To access Object Import feature, click **Import Object**.

Identity Management Objects - To access Object Export and Import feature for Identity Management Objects: From the Admin Console, click **Identity Management** and

- To access Object Export feature, click **Object Migration (Export)** tile.
- To access Object Import feature, click **Object Migration (Import)** tile.

Export Object

Object Export Definition is a collection of objects that can be exported across environments.

You can view the list of object export definitions that are already created in the **Object Export Summary**. You can also view the following details about each object definition.

- **Name** - The unique name assigned to the collection when the export definition was created.
- **Object Migration Status** - The export status of a specific object definition.
 - **Success** - Indicates that the export is completed successfully.

- **Failed** - Indicates that the export was not successful. You can reinitiate the migration of the specific object definition.
- **Saved** - Indicates that the object definition is created successfully and is yet to be exported.
- **In Progress** - Indicates that the export is in progress. Once the export is complete, the status will change to Success/Failed.
- **Last Modified By** - The ID of the Last Modified by user who has modified the definition. On mouse over, the Last Modified Time and Date are displayed.

To filter the list and view specific Object Definition, use one of the following search options:

- To search for a specific Export Object Definition, type the first few letters of the export definition that you want to search in the Search Box and click **Search**. The search results display the names that consist of your search string in the list of available definitions.
- Enter the number of records to be viewed in a single page, in the **Records** box, at the bottom of the page. You can increase or decrease the number of entries that are displayed using the up and down arrows.
- You can navigate between pages in the **View** bar, use the navigation buttons present at the bottom of the page.

Creating Export Definitions

You can create export Meta data objects using the System Configuration tab in Admin Console.

For more information about the supported object types, refer to [Migration Object Types](#). Refer to the following steps, to create a migration export object.

1. Click **Add** in the **Object Export Summary** Page to view the **Migration Definition** page.
2. Enter the following details, in the **Migration Definition** page.
 - **Migration Name:** Enter the code of the export of objects to be migrated definition. This is a unique identifier.
 - **File Name:** The system auto-creates the file name of the objects that can be used to export the definition in the following format:
 - **For Business Objects:** Migration Name_BO_Time Stamp_Tenant_Release Version (time stamp format: MMDDYYYY HHMMSS)
Example: EXP_DQRULE_BO_07312025_162240_zqvzly-prd_25_09_01.DMP
 - **For Identity Objects:** Migration Name_IDM_Time Stamp_Tenant_Release Version (time stamp format: MMDDYYYY HHMMSS)
Example: EXP_DQRULE_IDM_07312025_162240_zqvzly-prd_25_09_01.DMP
3. Click **Apply** to save the details and view the **Object Selection** Page.
4. Click **Add** to include Migration objects to the definition.
5. Select the required **Object Type** from the Object Types drop-down list.
6. Select the objects to be added to the Migrate Definition and click **Save**, to create a new migration object. To select all objects, click the check box adjacent to **Code**. The selected objects appear under **Selected Objects** on the right.

A confirmation message is displayed, when the definition is saved successfully. The new migration definition is listed in the Object Export Summary Page and the status is set to **Saved**.

You can also click **Export**, to export the object.

Editing Export Object Definitions

You can edit the Export Object definitions that are not exported and their status is **Saved** or **Failed**.

If the definitions is already exported and the status is set to **Success**, you cannot edit that definition.

To edit an Export Object definition, follow these steps.

1. In the Object Export Summary page, highlight the definition and click **Menu**, and select **Edit**.

The **Object Selection** page is displayed.

2. Modify the following details, if required, and click **Save** to changes.

- Select the required **Object Type** from the Object Types drop-down list.
- Select the objects to be added to/deleted from the definition.

3. After adding/deleting all the required objects, click **Save**.

The Export definition is saved successfully and a confirmation message is displayed. The new definition is listed in the Object Export Summary page and the status is set to **Saved**.

4. If you want to Save and Export the Definition, click **Export**.

Exporting Object Definition

After creating the object definitions, you can export them for migrating between environments, using Object Migration (Export) feature.

You can export object definitions in **Saved** or **Failed** state from the object Summary page. Refer to the following steps, to export definitions.

1. In the Object Summary Page, highlight the migration definition and click **Menu**.
2. Select **Export** from the menu.

After you export, the following Export status types are displayed:

- **Success** - Indicates that the definition is exported successfully.
- **Failed** - Indicates that the definition was not exported. Right-click and select **Export**, to reintiate the export process.
- **In Progress** - Indicates that the export is in progress. Once the export is completed, the status will change to Success/Failed.

Viewing Export Object Details

Using the **View** option, you can view the list of objects and the dependancies added to an Object definition. You can also view the object details.

1. Highlight the Export definition and click **Menu**.
2. Select **View**. The object types, list of objects and the dependent objects added to the export definition are listed in the left pane.
3. Double-click an object to view the object attribute details.

Re-exporting Object Definitions

If the underlying metadata of an exported object definition has changed, you can re-export the same using Object Migration Re-Export feature.

This feature is enabled only for definitions that are successfully exported.

Refer to the following steps to re-export object definitions.

1. In the Object Export Summary page, highlight the migration definition you need to re-export and click **Menu**.
2. Select **Re-Export** from the menu.
The **Migration definition** screen appears.
3. Specify a unique name for the re-export.
The file name is displayed automatically.
4. Click **Export**.

After you re-export, the following status types are displayed:

- **Success** - Indicates that the definition is re-exported successfully.
- **Failed** - Indicates that the definition was not re-exported.
- **In Progress** - Indicates that the re-export is in progress. Once the re-export is completed, the status will change to Success/Failed.

View Object Definition Export Log Details

View log facilitates you to view the export log information of the object definition with the migration status.

Note

The View Log page for an object definition with status **Saved** will be empty.

To view the log details of object with migration status **Success** or **Failed**, follow these steps.

1. In the Object Export Summary page, mouseover the object definition and click **Menu**.
2. Select **View Log** from the drop-down menu, to access the **View Log** page.

The migration status of the objects with following details is displayed.

- **Object Migration ID** - The migration ID associated with the definition.
- **Object Type** - The object type of the definition.
- **Object Code** - The object code associated with the definition.
- **Creation Date** - The date of creation of the definition.
- **Created By** - The User Id of the User who created the definition.
- **Status** - The migration status of the definition.
 - **Success** - Indicates that the export migration was completed successfully.
 - **Failed** - Indicates that the export migration did not complete.
 - **Export Status Message** - The complete export status message.

Note

Export status message currently not supported for GL reconciliation.

3. Click **OK** to close the page, after viewing the log details.

Downloading Dump File

You can download the export dump file for exported definitions to a local directory, using Download Dump file option.

The downloaded export dump file can be used to upload objects to a different environment.

Note

This option is enabled, only if the definition is exported successfully and the **Migration Status** is set to **Success**.

To download a export dump file, refer to the following procedure.

1. Mouseover a migrated object and select **Menu**.
2. Select **Download Dump File** from the drop-down menu, to download the associated dump file and store it to the local directory.

Deleting Export Object Definition

You can delete only definitions that are set to **Saved** or **Failed** status.

To delete a export object definition, follow these steps.

1. In the Object Export Summary page, mouseover the definition to be deleted and click **Delete**.
2. Click **Yes** to confirm and proceed with the deletion.

Import Object

Object Import Definitions is a collection of objects that can be imported across environments.

You can view the list of Object Import Definitions that are already created in the **Object Import Summary**. You can also view the following details about each Object definition.

- **Name** - The unique name assigned to the collection when the Import definition was created.

Note

Up to Release 26A, Object Migration performed duplicate checks in the target environment by considering both the **Code** and **Name** of the object definition. From Release 26A onwards, the duplicate check is performed only based on the Code of the object definition. This enhancement is not applicable to duplicate name checks for **IRC** and **IRC Loader** objects.

- **Object Migration Status** - The import status of a specific Object definition.

- **Success** - Indicates that the import is completed successfully.
- **Failed** - Indicates that the import was not successful. You can reinitiate the migration of the Specific Object Definition.
- **Skipped:** - Indicates that during object migration, if the overwrite flag is set to **No** and the same code, name, or both already exist in the target environment. p

Note

If the overwrite flag is set to **Yes**:

And both the code and name match, the object is migrated. However, if either the code or name does not match, the system marks the object as **Skipped**.

- **Saved** - Indicates that the Object Definition is created successfully and is yet to be imported.
- **In Progress** - Indicates that the import is in progress. Once the import is complete, the status will change to Success/Failed.
- **Last Modified By** - The ID of the Last Modified by user who has modified the definition. On mouse over, the Last Modified Time and Date are displayed.

To filter the list and view Specific Object Definition, use one of the following search options.

- To search for a Specific Import Object definition, type the first few letters of the Import definition that you want to search in the Search box and click **Search**. The search results display the names that consist of your search string in the list of available definitions.
- Enter the number of records to be viewed in a single page, in the **Records** box, at the bottom of the page. You can increase or decrease the number of entries that are displayed using the up and down arrows.
- You can navigate between pages in the **View** bar, use the navigation buttons present at the bottom of the page.

Creating Object Import Definitions

You can create Import definitions and add Import Objects using the Object Migration (Import) feature.

1. Click **Add** in the **Object Import Summary** page to view the **Migration Definition** page.
2. Enter the following details, in the **Migration Definition** page.
 - **Migration Name** - The Unique Name for the New Import Object definition. The migration name should not contain any space and exceed 30 characters. Underscore (_) and hyphen (-) are allowed.
 - **Dump File** - Select the .DMP file to be uploaded for creating the Import definition. You can select the dump file using one of the following options:
 - Select the option **Object Store**, to select the dump file (.DMP file) from the list of dump files available in the same environment.
 - Select the option **Local Machine** and click **Drag and Drop**, to add a .DMP file, from the local directory. You can only Add Dump file that are downloaded using Download Dump file option.

Note

- Uploading a dmp file either created or edited locally will generate an error.
- You can rename the .DMP file, if required. Ensure to follow the naming convention. For more information, refer to [File Naming Conventions for Migrate Objects](#).

- **Import All** - Select an option to import the objects that are associated with the selected object type. You can edit this option if required, in the **Object Selection** page.
 - **Yes** - Imports all the objects that are included in the dump file.
 - **No** - Imports only those objects that you can select in the **Object Selection** page.
 - **Fail on Error** - Select an option to proceed with the definition creation in case of an error. You can edit this option if required, in the **Object Selection** page.
 - **Yes** - Stops the creation process, if error is generated.
 - **No** - Creates the import definition even when error is generated. The object with the error is not included in the object creation.
 - **Overwrite** - Select an option to overwrite the existing definition. You can edit this option if required, in the **Object Selection** page.
 - **Yes** - Replaces the existing Import definition.
 - **No** - Creates a new Import definition.
3. Click **Save** to save the details.

The Import definition is created and **Object Selection** page is displayed. You can add objects to this import definition.
 4. Click **Add** to include objects to the definition.
 5. Select the required **Object Type** from the Object Types drop-down list.

Objects that are defined in the environment with respect to the selected object type are listed. For example, if Schedule is selected as the Object Type, all the Objects defined with respect to Schedule, in the environment are only listed.

You can also enter the first few letters of the object name in the Search Field, to narrow down the search.
 6. Click the check box adjacent to each object, to include the objects associated with a specific object type, to the import definition. To select all objects, click the check box adjacent to **Code**. The selected objects appear under **Selected Objects** on the right.
 7. Repeat steps 4, 5 and 6, to include objects associated with various object types.
 8. After adding all the required objects, click **Save**.

The Import definition is saved successfully and a confirmation message is displayed. The new definition is listed in the Object Import Summary page and the status is set to **Saved**.
 9. If you want to Save and Export the Definition, click **Import**.

Editing Import Definitions

You can edit the Import definitions that are not imported and their status is **Saved** or **Failed**.

If the definitions is already imported and the status is set to **Success**, you cannot edit that definition.

To edit an Import definition, follow these steps.

1. In the Object Import Summary page, highlight the definition and click **Menu**, and select **Edit**.

The **Object Selection** page is displayed.

2. Edit the following details, if required, and click **Save** to changes.
 - Select the required **Object Type** from the Object Types drop-down list.
 - Select the objects to be added to/deleted from the definition.
3. After adding/deleting all the required objects, click **Save**.

The import definition is saved successfully and a confirmation message is displayed. The new definition is listed in the Object Import Summary page and the status is set to **Saved**.

4. Click **Save** to update the changes.
5. If you want to Save and import the Definition, click **Import**.

Importing Object Definitions

After creating the object definitions, you can export them for migrating between environments, using Object Migration (Import) feature.

You can import object definitions in **Edited** state from the object Summary page. Refer to the following steps to import Object definitions.

Note

Comments and Documents attached to an Issue/Action will not be migrated.

1. In the Object Summary Page, mouse-over the definition and click **Menu**.
2. Select **Import** from the drop-down menu.

After you import, the following Import status types are displayed:

- **Success** - Indicates that the definition is imported successfully.
- **Failed** - Indicates that the definition was not imported. Right-click and select **Import**, to restart the import process.

Note

If the Process code is not unique and if the **Overwrite** flag is set as **No** while importing the object definition, the migration request fails and when you view the logs, the following error is displayed "**Process code is not unique, Migration Request Failed**"

- **Skipped:** - Indicates that during object migration, if the overwrite flag is set to **No** and the same code, name, or both already exist in the target environment.

Note

If the overwrite flag is set to **Yes**:

And both the code and name match, the object is migrated. However, if either the code or name does not match, the system marks the object as **Skipped**.

- **In Progress** -Indicates that the import is in progress. Once the import is completed, the status will change to Success/Failed.

Re-importing Object Definitions

If the underlying metadata of an imported object definition has changed, you can re-import the same using Object Migration Re-Import feature.

This feature is enabled only for definitions that are successfully imported.

Refer to the following steps to re-import object definitions.

1. In the Object Imports Summary page, highlight the migration definition you need to re-import and click **Menu**.

2. Select **Re-Import** from the menu.

The **Migration definition** screen appears.

3. Specify a unique name for the re-import.

4. **Overwrite**: Select an option to overwrite the existing definition. You can edit this option if required, in the Object Selection page.

- **Yes** - Replaces the existing Import definition.
- **No** - Creates a new Import definition.

5. Click **Import**.

After you re-export, the following status types are displayed:

- **Success** - Indicates that the definition is re-imported successfully.
- **Failed** - Indicates that the definition was not re-imported.
- **In Progress** - Indicates that the re-imported is in progress. Once the re-imported is completed, the status will change to Success/Failed.

Viewing Import Object Details

Using the **View** option, you can view the list of objects and the dependancies added to an Object definition. You can also view the object details.

1. Mouseover the migration definition and click **Menu**.
2. Select **View**. The object types, list of objects and the dependent objects added to the export definition are listed in the left pane.
3. Double-click an object to view the object attribute details.

Viewing Object Import Log Details

View log facilitates you to view the log information of the object definition with the migration status.

Note

The View Log page for a definition with migration status **Saved** will be empty.

To view the log details of definition with migration status **Success**, **Failed**, or **Skipped**, follow these steps.

1. In the Object Import Summary window, mouseover the migration definition and click **Menu**.
2. Select **View Log** from the drop-down menu, to access the **View Log** page.

The migration status with following details is displayed.

- **Object Migration ID** - The migration ID associated with the import object.
- **Object Type** - The object type of the import object.
- **Object Code** - The object code associated with the import object.
- **Creation Date** - The date of creation of the import object.
- **Created By** - The User Id of the User who created the import object.
- **Status** - The import status of the specific object.
 - **Success** - Indicates that the specific object was imported successfully.
 - **Failed** - Indicates that the specific object was not imported.
 - **Skipped** - Indicates that the specific object was skipped.
- **Import Status Message** - The complete import status message.

Note

Import status message currently not supported for GL reconciliation.

3. Click **OK** to close the page, after viewing the log details.

Deleting Import Definition

You can delete only definitions that are set to **Saved** or **Failed** status.

To delete an import definition, follow these steps.

1. In the Object Import Summary page, mouseover the definition to be deleted and click **Delete**.
2. Click **Yes** to confirm and proceed with the deletion.

Changing Object Ownership

Access Type for most objects can be defined as 'Read Only' and 'Read/Write'. When it is defined as 'Read Only' the user who created owns it i.e., another user will be able to only view

it. For any reason if the owner of object is not available then no one else will be able to modify it.

This functionality helps you to change the ownership of objects from one user to another user(s).

Changing the ownership of object is generally required when the users of the application move across different teams or leave the organization. In this case, the ownership of the objects created by a particular user remain on that user's name and they need to be transferred to different user to enable them to operate on them.

To change the ownership of objects, you must raise a Service Request with the Oracle Support Team with the following information. Oracle Support Team will coordinate with the Operations team to change the ownership.

- The existing username who created the object.
- The new username to which the ownership must be transferred.

Precursor to Analytics

Prerequisite Configuration steps to ensure that Financial Statements available at the Reporting Layer are correctly populated.

Financial Element Hierarchy and Mapping for Custom Hierarchies

At the heart of all the reporting and analytics in PACS, lies Financial Statements – or most importantly the Income Statement. The other financial statement that is part of the Management Reporting dashboard is the Balance Sheet. At the core of Financial Statements defined within PACS are Financial Elements – in short FE's. A Financial Statement, at its core is nothing but a hierarchical representation of Financial Elements. While PACS has seeded OOTB Financial Statements (Balance Sheet Hierarchy and Income Statement Hierarchy available from Dimension Management UI), it also allows banks/ customers to create their own custom variations of those Financial Statements. It is however recommended to use one version while analyzing at the same time the Income Statement for both Top Down (Management Ledger Reporting) and Bottom Up (Instrument Reporting) purposes.

The Financial Element Hierarchy is the access point for all the Financial Statements. For the Analytics Reports to show up on the respective dashboards, there are some tasks that you need to perform at the Profitability Management Cloud Service (PFTCS) end, which is currently a prerequisite for the Profitability Analytics Cloud Service to be operational.

As soon as you have these hierarchies in place (refer to Dimension Management for more details) you need to perform profitability allocation both top-down and bottom-up so for both Management Ledger and Instruments tables. Ideally the allocation must be performed on the financial elements that are pertaining to that hierarchy - the ones you will be utilizing for the Income Statement. After the allocation has been performed on the Top-Down Income Statement, the runchart must be executed to propagate the data in the results area, for the purposes of Management Reporting.

For Bottom Up – Profitability Insights, Customer Profitability Reports and so on, you will have to execute an additional step from the set-up configuration menu **Financial Element Mapping**. This functionality allows you to map the FE's you have allocated to the Instrument Portfolio columns. Note that allocations to the instrument columns can be done during the usual course of defining and executing allocation rules at PFTCS – the Profitability Management Cloud Service. The application also allocates the instrument columns on the lines of the FE's of the Top-Down Income Statement.

Additionally, you can also directly allocate Instrument columns without passing via Management Ledger, by defining those rules separately in the allocation process. In essence, the FE to Line Item Mapping functionality allows you to define a one-to-one mapping of a FE to a portfolio column - which comes with the capability, via runchart execution, to read the instrument columns you have allocated in the previous step and propagate the data into the results area for PACS and retrieve the hierarchy of the Bottom Up Income Statement that is consistent with the Top-Down Income Statement created using the Financial Element Hierarchy.

This mapping is already available for the seeded Income Statement Hierarchy for the Bottom-Up scenario. However, for a custom Income Statement Hierarchy, if you create new FE's, then those FE's will also require a corresponding Instrument Portfolio column that you have allocated. Additionally, that column, which can be an existing column or placeholder, must be mapped via the **Financial Element Mapping** UI.

After the mapping and hierarchies are in place, the allocations have been run and runcharts are executed, the results area is populated, paving the way for Income Statements at Management Ledger and account levels. Subsequently, these results are consumed by the Reporting Layer, which feeds the reports for – Management Reporting, Profitability Insights, Segmentation, Income Statement at account and customer levels, CLTV Forecast, Customer Group Income Statement and so on.

Functional Currency for Reporting

To see the analytics reporting amounts in a preferred functional currency, there are some tasks that you need to perform at the Profitability Management Cloud Service (PFTCS) end, which is currently a prerequisite for the Profitability Analytics Cloud Service to be operational.

In PFTCS you will need to visit the Reference Data menu and set up a currency in the Currencies module. For functional currency, please indicate No for Reporting currency. Next you will need to access the Currency Rates module under Reference Data menu to define the exchange rate, applicable for a specified time period. As of now multiple currency rate providers is not supported. Note that Conversion rate used in reporting layer is always the latest exchange rate data and rate provider combination value as per the inputs provided. If you want to figure out the exchange rate getting used, you can click on Actions > Analytics under Currency Rates to see the analytics report. Else you can refer to the same report under Operations Analytics section of the Analytics menu under PACS. Once the currency rate has been loaded and validated, please select the preferred functional currency for Analytics reporting from the dropdown under the Global Parameters section of the Preferences menu in PACS.

10

Analytics

This chapter describes the features and functions of Profitability Analytics Cloud Service's (PACS) and is intended for the use of Administrators, Analysts, Reporting and Analysts.

Profitability and Balance Sheet Management (PBSM) Cloud Service utilizes the power of Oracle Analytics to generate the Business Intelligence Reports.

Oracle Analytics is a scalable and secure Oracle Cloud Service that provides a full set of capabilities to explore and perform collaborative analytics for you, your workgroup, and your enterprise.

With Oracle Analytics Cloud, you also get flexible Service Management capabilities, including fast setup, easy scaling and patching, and automated lifecycle management.

For more information, see the [Oracle Analytics Cloud](#) documentation.


Note

Please refer to the [Doc ID: 2869409.1](#) to retrieve the Profitability and Balance Sheet Management Cloud Service Glossary of the Reporting Data Model (RPD Subject Areas).

Access Business Intelligence (BI) Reports

This section describes the steps to access the Business Intelligence (BI) Reports.

To access the Oracle Financial Services Profitability Management Cloud Service BI Reports, from the LHS Menu, select **Analytics**, and then select **Home Page**.

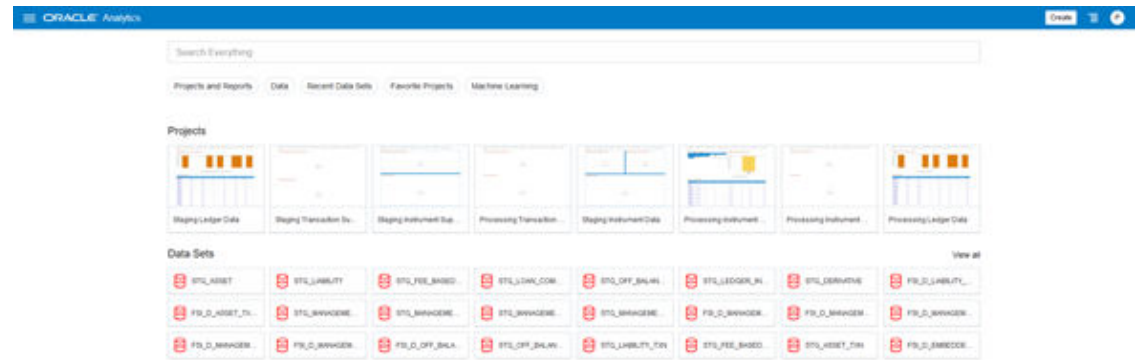Figure 10-1 Analytics Home Page

SQL Query Browser

Data Sets are self-service Data Models that you build specifically for your Data Visualization and Analysis requirements.


A Data Set can be based on one Table, Spreadsheet, or a File. Alternatively, a Data Set can be a self-service Data Model that contains multiple Tables with relationships defined between the Tables.

A Data Set contains Data Source Connection Information, Tables, the Columns you specify, and the Data Enrichments, and Transformations that you apply.


For more information, see [Visualizing Data and Building Reports in Oracle Analytics Cloud](#).

To access the SQL Query Browser and prepare Data, follow these steps:

1. From the LHS Menu, select Analytics, and then select SQL Query Browser.
The SQL Query Browser allows you to use an existing Database Connector named Analytics – Public to interact with the underlying available Database Structures.
2. After selecting the Database Connector, you must select the Database Schema named ANALYTICS_PUB to proceed to the next step of Database Object Selection.

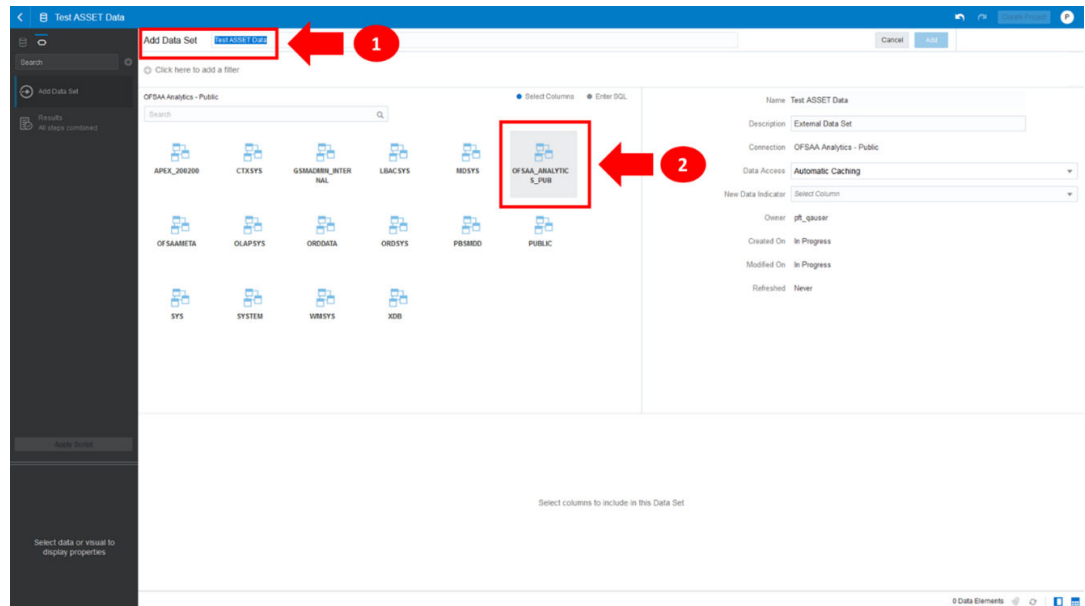
Figure 10-2 Add Data Set

3. Provide a meaningful name to the Data Set, which will be generated from this process and be used for the SQL Query Analysis.
4. You can search for a Database Object from the available options. You can either scroll down or search the Database Objects displayed in alphabetical order.

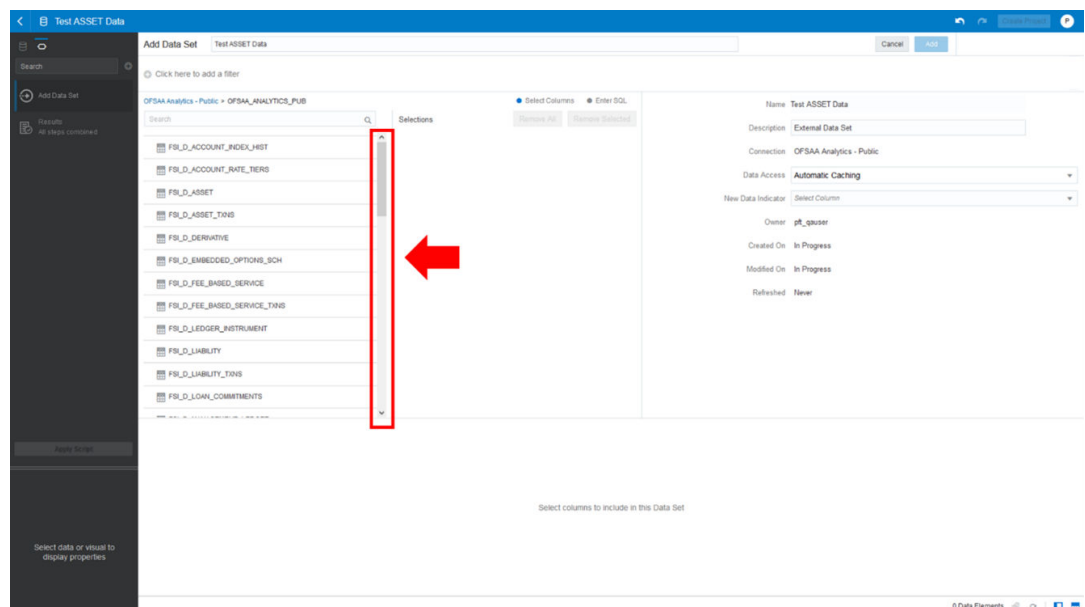Figure 10-3 Add Data Set – Search from the List


Or

Type the Database Object Name to filter the list with Description.

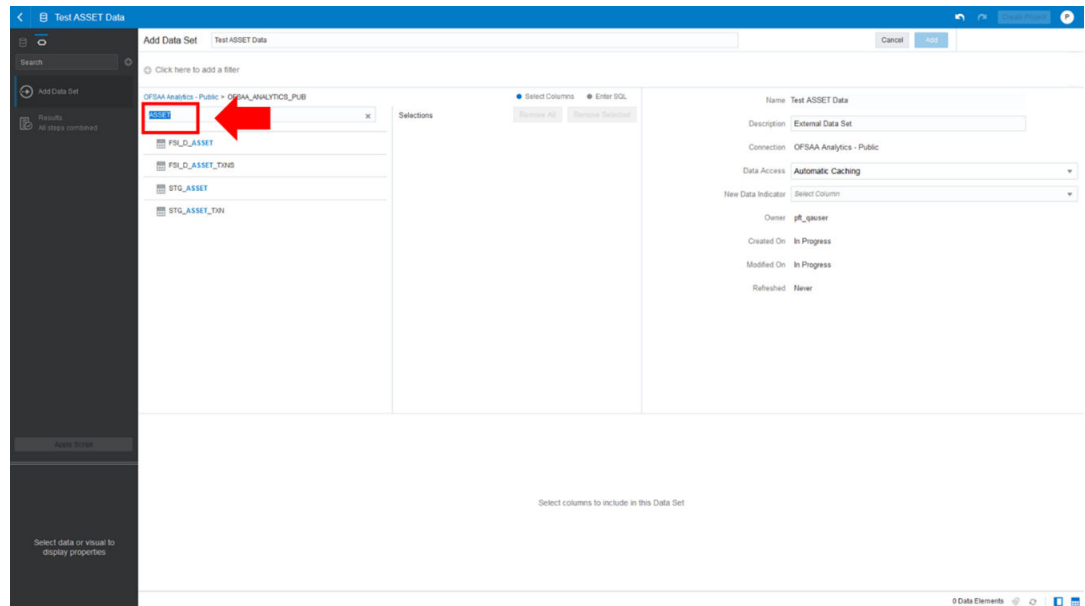Figure 10-4 Add Data Set – Search by Name


After you select the Object that want, you can proceed to the next step.

5. You search the Columns that are available for the selected Database Object by scrolling.

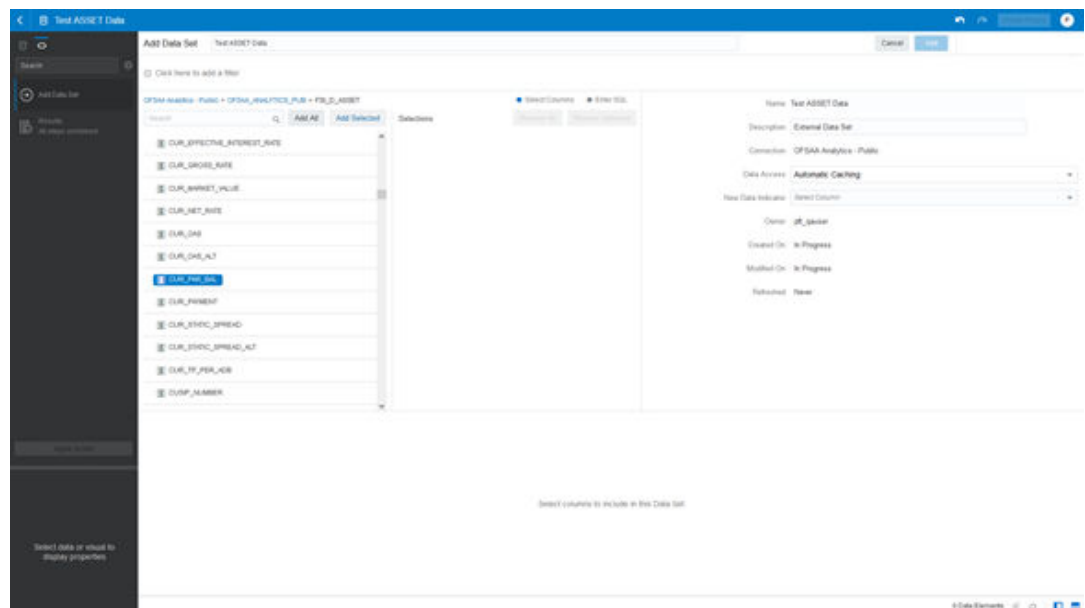Figure 10-5 Add Data Set – Search Columns


6. Add the Database Object Column as required.

Figure 10-6 Add Data Set – Adding the Database Object Column

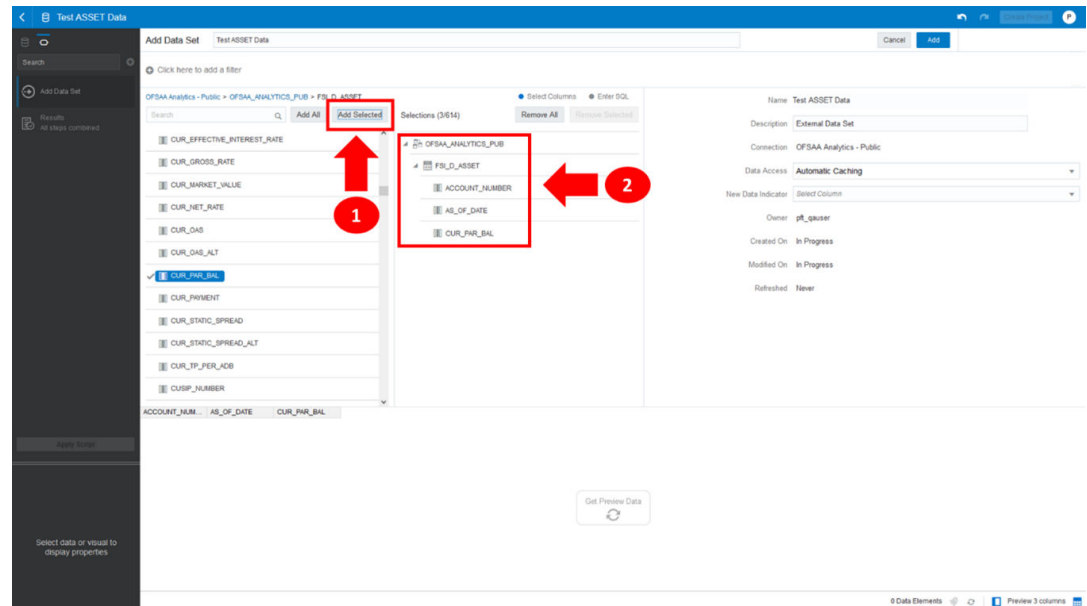


- Click Get Preview Data to display the retrieved Data Results.

Figure 10-7 Data Results

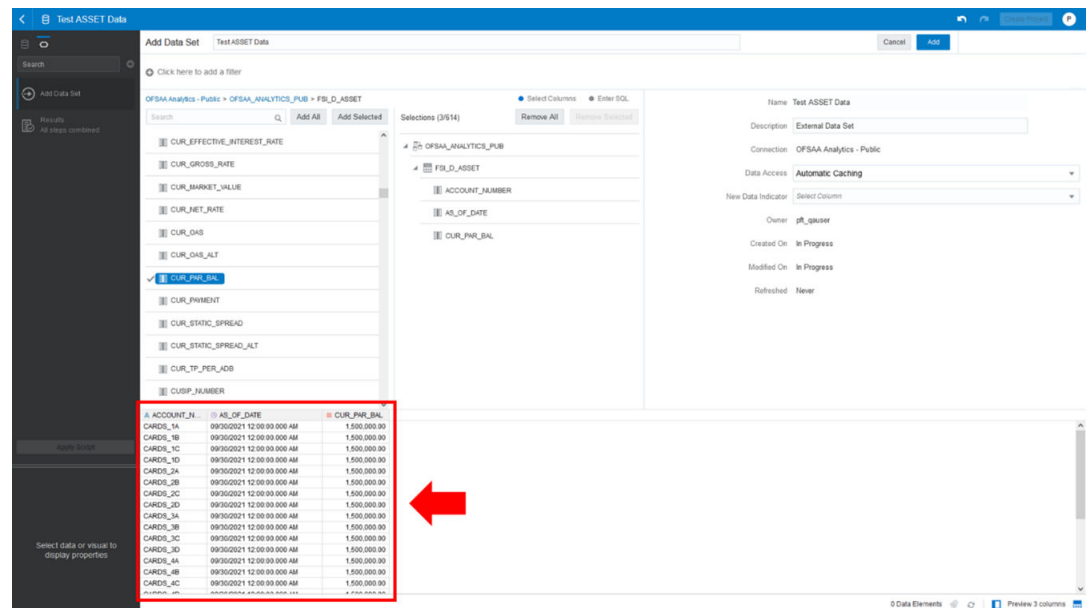


- In addition, you can switch to the Enter SQL Pane Editor. You can change the auto-generated SQL Query at any time and click Get Preview Data to retrieve the results based on the modified SQL Query.

Figure 10-8 Data Results based on modified SQL Query

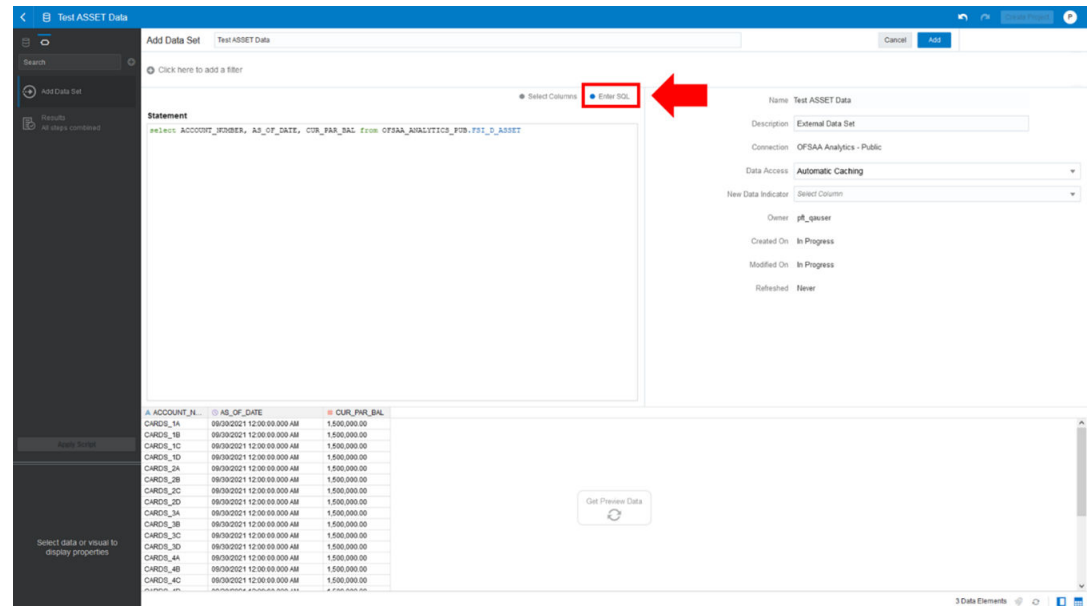

9. Click **Add** to save the SQL Data.
10. Click **Data** on the LHS Menu and click **Data Sets** to display the available Data Sets for usage.
11. Right-click on the Data Set name to display the options as shown:

Figure 10-9 Data Set Options

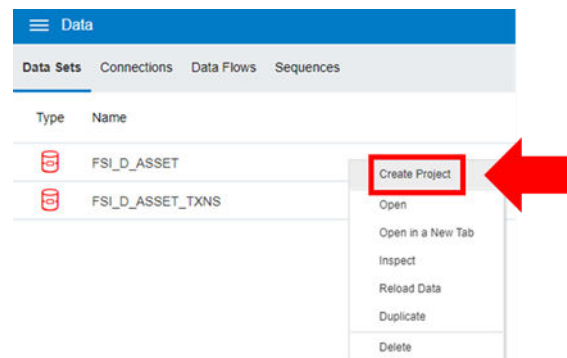

12. In the menu that is displayed, click **Create Project**.

Operational Analysis

This topic covers the following reports:

- [Dimensions Registry](#)
- [Currency Rates](#)
- [Segment Registry](#)
- [Data Quality Checks](#)

- [File Uploads](#)
- [Groups and Roles](#)
- [Tables and Partitions Report](#)

Dimensions Registry

To access the Dimensions Registry report, from the LHS menu, select **Operational Analysis**, and then select **Dimensions Registry**.

This is arranged as a set of reports catering to the analysis of the following categories:

- Financial Element
- Legal Entity
- Common COA
- GL Account
- Org Unit
- Product
- Industry
- Branch
- Geography
- IFRS9 Stage

Currency Rates

To access the Currency Rates report, from the LHS menu, select **Operational Analysis**, and then select **Currency Rates**.

Reporting Currency Rates is the currency in which an entity's financial statements or other financial documents are reported. Choosing one currency for reporting makes it easier to understand the financial documents across the board.

This is arranged as a set of reports catering to the analysis of the following categories:

- Floating Segment Rate
- Fixed Exchange Rate
- Exchange Rate

Segment Registry

To access the Segment Registry report, from the LHS menu, select **Operational Analysis**, and then select **Segment Registry**.

- This canvas shows an operational view of the segments for defined Segment Types, that were created using the segmentation UI. In particular, the reports focus on providing inputs on –.
- Segment Mapping Dimensions.
- Dimension Range Look Ups.
- Possible Intersection zones in case the same ranges for a particular dimension has been used in defining multiple Segments.

Report Filters

The following Report Filters are available:

- **Retail or Wholesale Flag:** You can use this filter to select customer type identification by category to retail or wholesale.
- **Segment Type:** You can use this filter to select a specific Segment Type for the Customer Profile.
- **Segment Name:** You can use this filter to select a specific Segment Type under the classification of segmentation Gold, Silver, Platinum, or Bronze.
- **Dimension Map Lookup Type:** You can use this filter to select an Exact Match or Range.
- **Segment Dimension Name:** You can choose an analysis dimension to assign to the report, they can be: ASSET Balance, Age, AVG Transaction Amount, Credit Score, Income, NIBT, No of Accounts, No of Transactions.
- **Band:** You can use this filter to select a specific range to define your band.

Data Quality Checks

To access the Data Quality Checks report, from the LHS menu, select **Operational Analysis**, and then select **Data Quality Checks**.

Data Quality Check Reports are divided into four canvases.

- DQ Check Platform Availability
- DQ Batch Executions
- DQ Results
- DQ Detail Results

DQ Check Platform Availability

You can use the following filters:

- **DQ Rule Name:** Rules created in the Application
- **Base Table:** Base tables used in the rules
- **Severity Values:** Error, Warning, Info

Total Checks: Number of Checks created in the Application.


Number of Total available checks for each Staging table: Gives the information regarding number of checks based on the various staging tables.

The following reports gives the information regarding the number of various checks created.

- **Range Checks:** Total number of Range checks defined in the system.
- **Data Length Checks:** Total number of Data Length checks defined in the system.
- **Column Reference Checks:** Total number of Column Reference checks defined in the system.
- **List of Values Checks:** Total number of List of values check defined in the system.
- **Null Checks:** Total number of Null checks defined in the system.
- **Blank Checks:** Total number of Blank checks defined in the system.

- **Integrity Checks:** Total number of Integrity checks defined in the system.
- **Duplicate Checks:** Total number of Duplicate checks defined in the system.
- **Business Checks:** Total number of Business checks defined in the system.


Figure 10-10 Number of Total available Checks for each Staging table

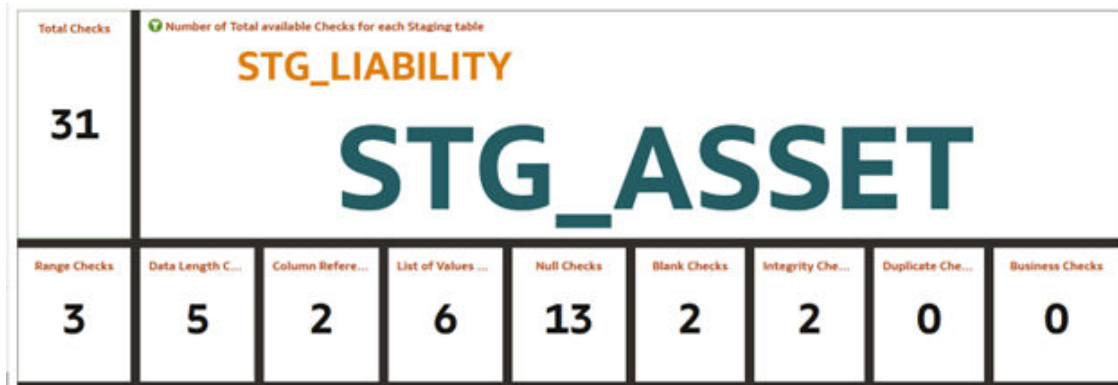

Data Quality Checks Distribution gives the distribution of checks based on the base tables.

Detail of Available quality checks in the platform gives the percentage distribution according to severity category defined on different Staging tables.

Figure 10-11 Detail Quality Checks Distribution and Detail of Available Quality Checks in the Platform

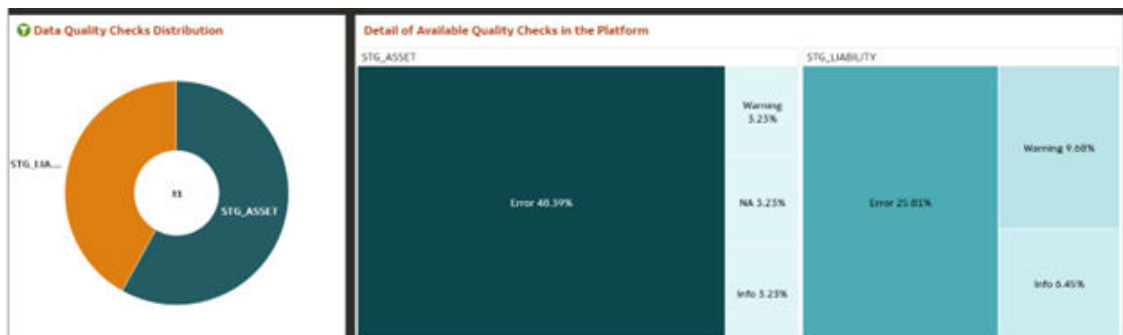

DQ Batch Executions Canvas

This canvas gives the information regarding the Batches executed on Data Quality Checks.


You can use the following filters:

- **Batch Identifier:** Batches executed in the system.
- **Process Identifier:** Process Name for the executed batch in the system.
- **Fic Mis Date:** Batch execution date.
- **DQ Group Identifier:** Data Quality Groups created in the system.
- **DQ Group Description:** Description of Data Quality Groups.

- **DQ Check Identifier:** Data Quality checks created in the system.
- **DQ Check Description:** Description of Data Quality checks.
- **DQ Source Table:** Base table on which Data Quality check is created.
- **DQ Category Name:** Data Quality check category.


Data Quality Batch As Of Date: This report provides details on the executed checks, including the date of execution, Batch name, and the count of scanned records and failed records against each defined check and corresponding to Data Quality Category name.

Figure 10-12 Data Quality Batch As Of Date

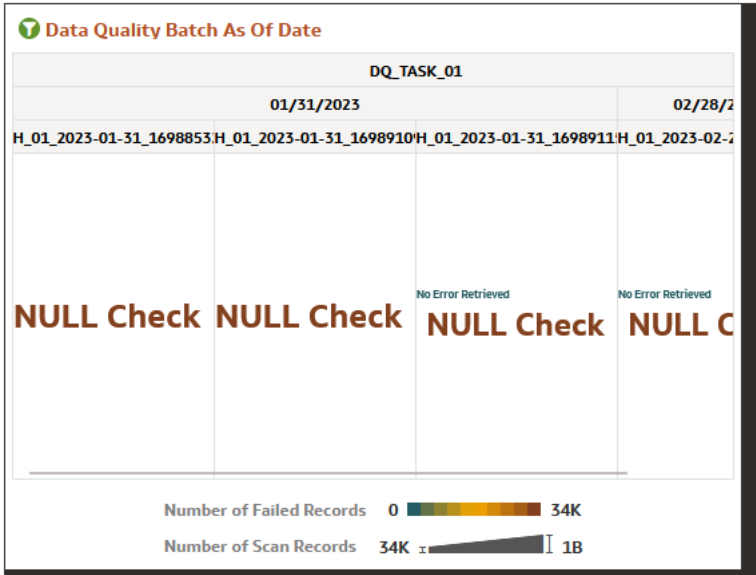


Results of Data Quality Batches by Severity and Category: This report provides details on the quantity of failed records across various batches, including the execution date and batch name according to Data Quality Category Name.

Figure 10-13 Data Quality Batch Results by Severity and Category

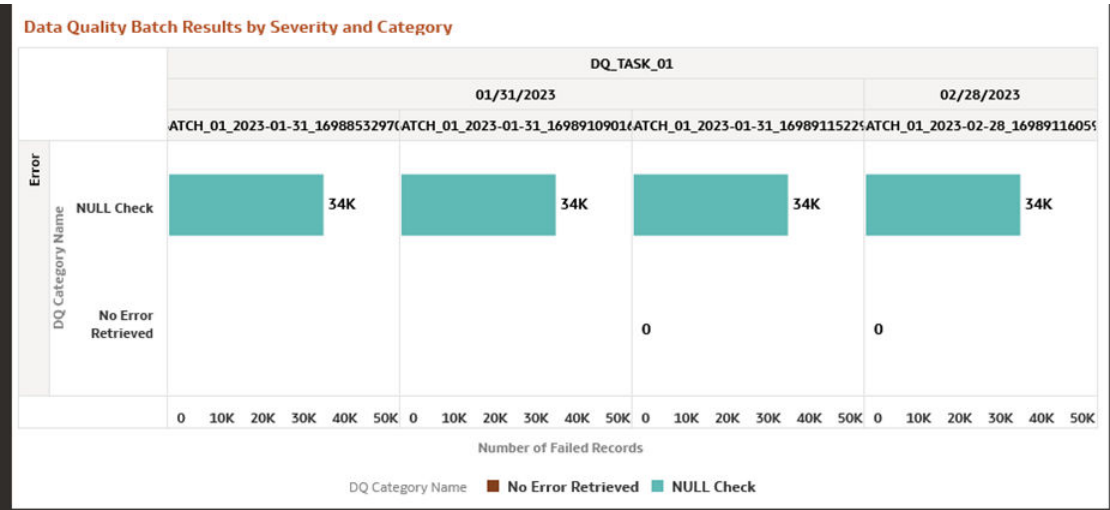

These tile reports display information about total number of scanned records and total number of failed records according to the last available Data Quality batch execution.

Figure 10-14 Number of Scan Records and Number of Failed Records

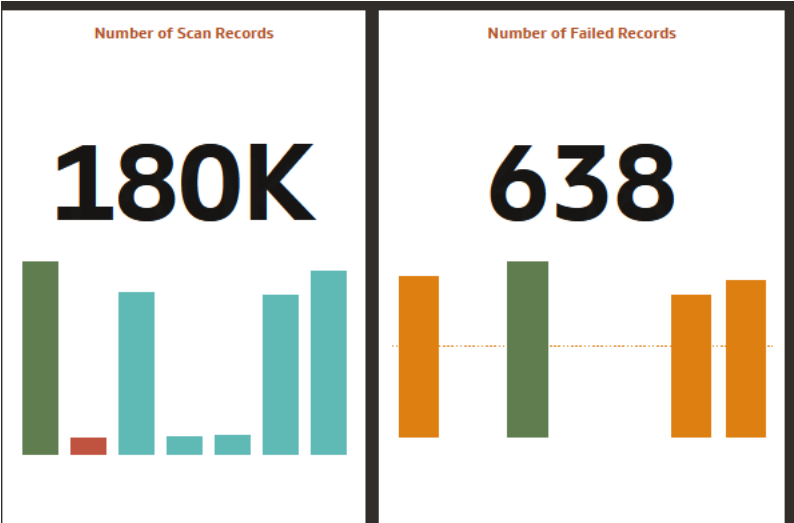

Results of Data Quality Batches for Scanned and Failed Records: This report presents a bar chart illustrating the total number of scanned records and total number of failed records, categorized by batch name and execution date.

Figure 10-15 Data Quality Batch Results for Scan and Failed Records



DQ Results


You can use the following filters:

- **Batch Identifier:** Batches executed in the system.
- **Process Identifier:** Process Name for the executed batch in the system.

- **Fic Mis Date:** Batch execution date.
- **DQ Group Identifier:** Data Quality Groups created in the system.
- **DQ Group Description:** Description of Data Quality Groups.
- **DQ Check Identifier:** Data Quality checks created in the system.
- **DQ Check Description:** Description of Data Quality checks.
- **DQ Source Table:** Base table on which Data Quality check is created.
- **DQ Category Name:** Data Quality check category.


Number of Records Failed by Data Quality Category Check: This report showcases the number of failed records for each Data quality check by batch names and execution dates according to Data Quality Category Name.

Figure 10-16 Number of Record Failed by DQ Category Check

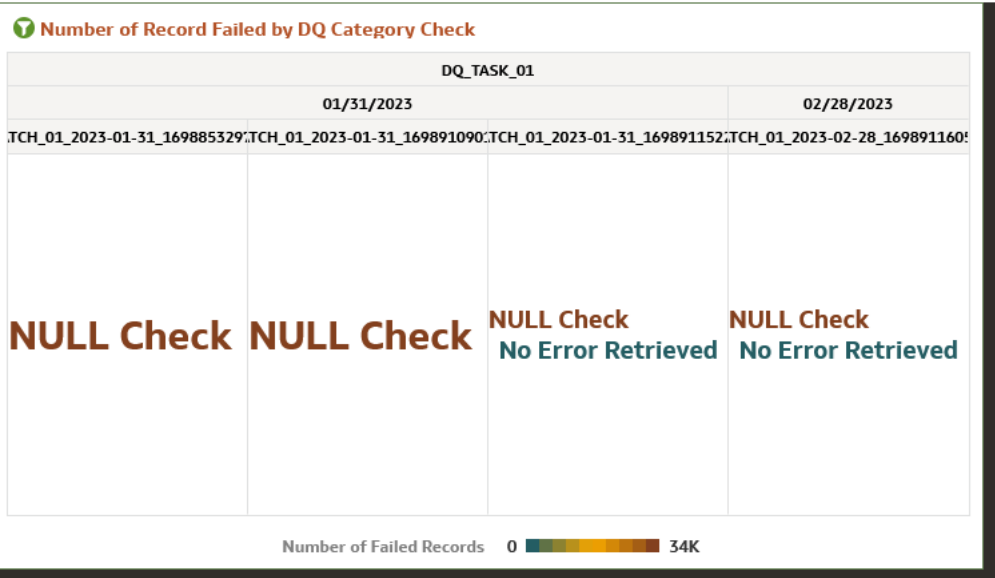


Percentage of Record Failed by DQ Category Check: This report gives the information regarding Percentage distribution and total number of checks by batch names and execution dates displayed by Data Quality Category Name.

Figure 10-17 Percentage of Record Failed by DQ Category Check

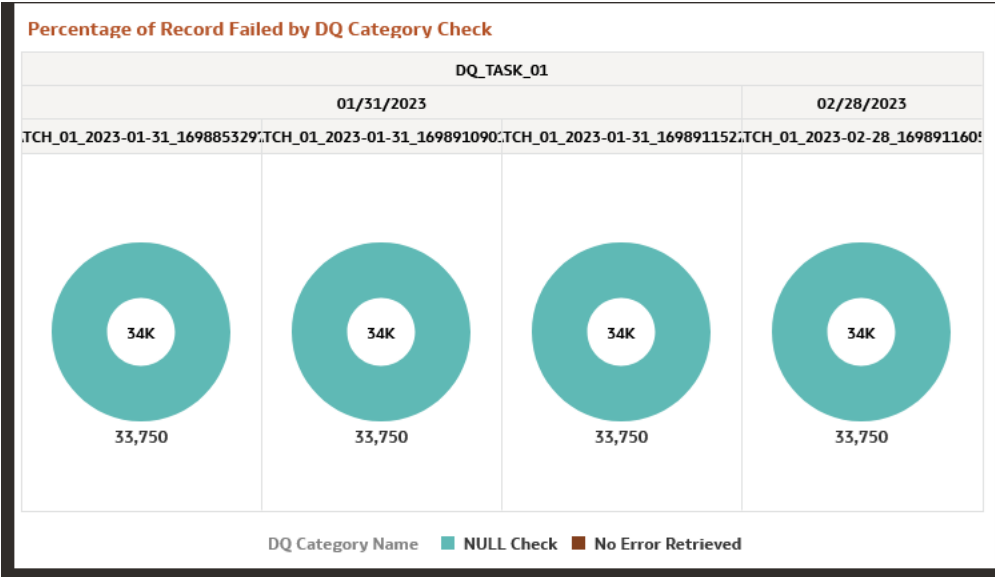

Number of Records Failed by DQ Error Value: This report shows the information regarding number of errors along with the Data Quality Check Description separated by batch names and execution dates.

Figure 10-18 Number of Records Failed by DQ Error Value

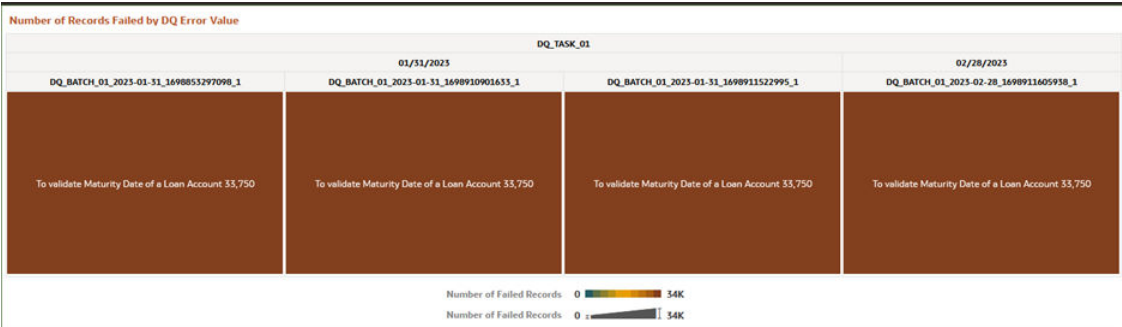

DQ Detail Results

This canvas gives the detailed information regarding the Data Quality Batch information.

Figure 10-19 DQ Detail Results

File Name	Batch Identifier	Process Identifier	DQ Group Identifier	DQ Group Description	DQ Check Identifier	DQ Check Description	DQ Category	DQ Category Name	DQ Source Table	DQ Source Column	Severity Values	Error Value	Default Value	Owner	Number of Rows	Number of Failed Rows	N_THRESHOLD_PERCENT	Rejection Count	Threshold Flag	Source PK Code
30/10/2015	T001	DQ-BATCH-STG-ASSET-BASE-001-2015-10-30-1491053879309_1	DQC-PR04-BASE-STG_ASSET_0001	Data Quality Group for Stage Asset Instruments - PR04CS 001	DQRL-PR04-BASE-0001	Account Number of the customer in Stage Assets should not have blank spaces	No Error Retrieved	STG_ASSET	ACCOUNT_NUMBER	Error				CFTEST	1,914	0	1	1	N	
30/10/2015	T001	DQ-BATCH-STG-ASSET-BASE-001-2015-10-30-1491053879309_1	DQC-PR04-BASE-STG_ASSET_0001	Data Quality Group for Stage Asset Instruments - PR04CS 001	DQRL-PR04-BASE-0002	Transaction Fees in Stage Assets must not be greater than Annual Fees	No Error Retrieved	STG_ASSET	FRGN_TYX_FEES	Error				CFTEST	1,914	0	1	1	N	
30/10/2015	T001	DQ-BATCH-STG-ASSET-BASE-001-2015-10-30-1491053879309_1	DQC-PR04-BASE-STG_ASSET_0001	Data Quality Group for Stage Asset Instruments - PR04CS 001	DQRL-PR04-BASE-0006	Amortization Term Multiplier in Stage Assets should have list of values as Y/N	No Error Retrieved	STG_ASSET	AMRT_TERM_MULT	Error				CFTEST	1,914	0	1	1	N	
30/10/2015	T001	DQ-BATCH-STG-ASSET-BASE-001-2015-10-30-1491053879309_1	DQC-PR04-BASE-STG_ASSET_0001	Data Quality Group for Stage Asset Instruments - PR04CS 001	DQRL-PR04-BASE-0007	Common Chart Of Account Code in Stage Assets should be present General Ledger Account	95	NULL Check	STG_ASSET	COMMON_COA_CODE	Error			CFTEST	17,226	9	9	9	N	ACCOUNT_NUMBER.A
30/10/2015	T001	DQ-BATCH-STG-ASSET-BASE-001-2015-10-30-1491053879309_1	DQC-PR04-BASE-STG_ASSET_0001	Data Quality Group for Stage Asset Instruments - PR04CS 001	DQRL-PR04-BASE-0009	Longer Account Code in Stage Assets should be Not Null	95	NULL Check	STG_ASSET	GL_ACCOUNT_CODE	Warning	-1		CFTEST	17,226	9	9	9	N	ACCOUNT_NUMBER.A
06/01/2015	Data Quality Batch	DQ-BATCH-STG-ASSET-BASE-001-2015-10-30-1491053879309_1	DQC-PR04-BASE-STG_ASSET_0001	Data Quality Group for Stage Asset Instruments - PR04CS 001	DQRL-PR04-BASE-0003	Number of the customer in Stage Assets should not have blank spaces	No Error Retrieved	STG_ASSET	ACCOUNT_NUMBER	Error				CFTEST	2,431	0	1	1	N	
06/01/2015	Data Quality Batch	DQ-BATCH-STG-ASSET-BASE-001-2015-10-30-1491053879309_1	DQC-PR04-BASE-STG_ASSET_0001	Data Quality Group for Stage Asset Instruments - PR04CS 001	DQRL-PR04-BASE-0002	Transaction Fees in Stage Assets must not be greater than Annual Fees	No Error Retrieved	STG_ASSET	FRGN_TYX_FEES	Error				CFTEST	2,139	0	1	1	N	
06/01/2015	Data Quality Batch	DQ-BATCH-STG-ASSET-BASE-001-2015-10-30-1491053879309_1	DQC-PR04-BASE-STG_ASSET_0001	Data Quality Group for Stage Asset Instruments - PR04CS 001	DQRL-PR04-BASE-0006	Amortization Term Multiplier in Stage Assets should have list of values as Y/N	No Error Retrieved	STG_ASSET	AMRT_TERM_MULT	Error				CFTEST	2,405	0	1	1	N	
06/01/2015	Data Quality Batch	DQ-BATCH-STG-ASSET-BASE-001-2015-10-30-1491053879309_1	DQC-PR04-BASE-STG_ASSET_0001	Data Quality Group for Stage Asset Instruments - PR04CS 001	DQRL-PR04-BASE-0007	Common Chart Of Account Code in Stage Assets	95	NULL Check	STG_ASSET	COMMON_COA_CODE	Error			CFTEST	19,245	14	9	9	N	ACCOUNT_NUMBER.A

Figure 10-20 Data Action

STG_LIABILITY

13 Total Checks

STG_ASSET

Base Table: STG_LIABILITY	Base Table: STG_LIABILITY	Base Table: STG_LIABILITY	Base Table: STG_LIABILITY	Base Table: STG_LIABILITY	Base Table: STG_LIABILITY	Base Table: STG_LIABILITY	Base Table: STG_LIABILITY
Range Checks	Data Length Checks	Column Reference Checks	List of Values Checks	Blank Checks	Integrity Checks	Duplicate Checks	Business Checks
2	2	1	1	1	1	0	0

Data Quality Checks Distribution

Detail of Available Checks

Base Table: STG_LIABILITY

Base Table: STG_LIABILITY

Data Action: A Data Action link can pass context values as parameters to other canvas. In Data Quality Reports we have two data actions namely DQ Results and DQ details results.


DQ Results: When user right clicks on any element and navigates to DQ Result, the selected object will get passed as a filter and pass this filter in DQ results Canvas.

DQ Result Details: When user right clicks on any element and navigates to DQ Result Details, the selected object will get passed as a filter and pass this filter in DQ Results Details Canvas.

File Uploads

To access the File Uploads report, from the LHS menu, select **Operational Analysis**, and then select **File Uploads**.

Figure 10-21 File Upload Report

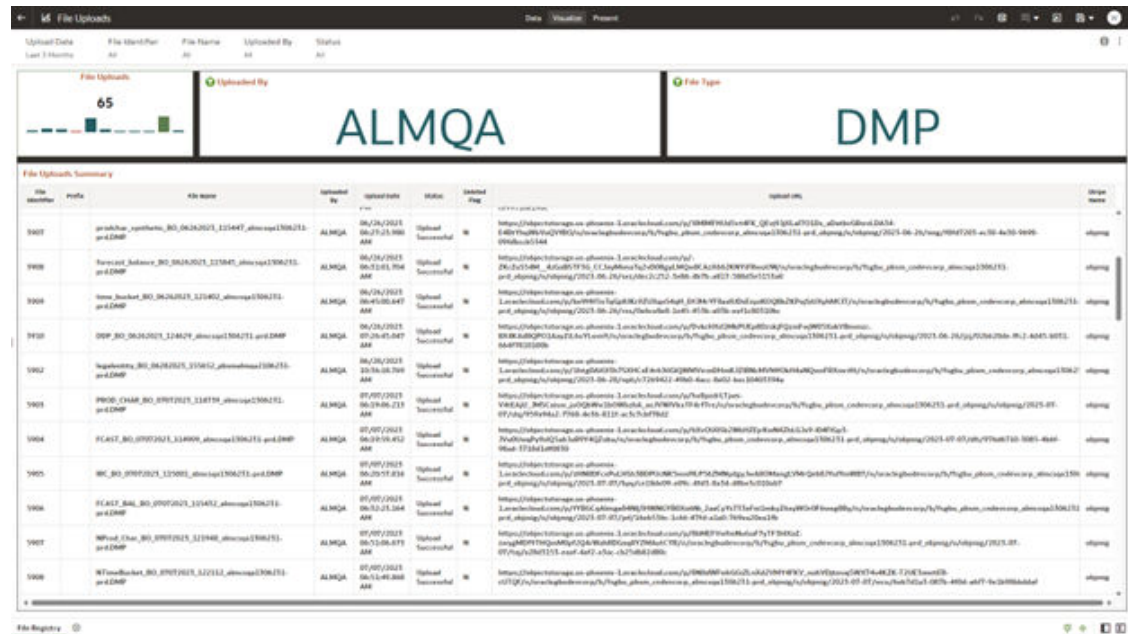

Report Common Filters

You can use a series of canvas level pinned Prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-22 Canvas Prompt Filters

Upload Date	File Identifier	File Name	Uploaded By	Status
Last 3 Months	All	All	All	All


The following filters are available:

- **Update Date:** Use this filter to select the Update Date. The selection default is Last 3 Months.
- **File Identifier:** Use this filter to select a specific File Identifier.
- **File Name:** Use this filter to select a specific File Name.
- **Upload By:** Use this filter to select Upload By.

Canvas File Uploads

This chart shows the total number of files uploaded based on a reporting period.

Figure 10-23 Canvas File Uploads

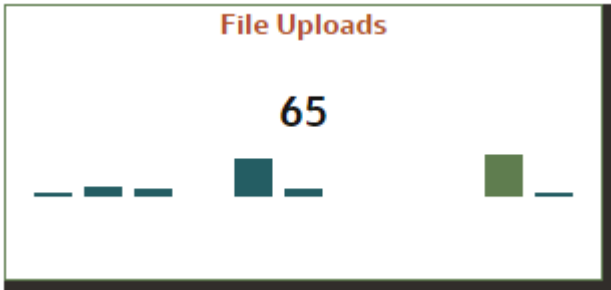

Canvas Uploads by

This filter enables you to view the details of the users who have uploaded the files via the UI or batch process.

Figure 10-24 Canvas Uploads by



Canvas File Type

This filter the data by the file type. In this case, it's DMP, but it can be CSV, TXT, or other formats supported by the UI.

Figure 10-25 Canvas File Type



Canvas Summary

This table gives a clear view of detailed file upload information, that is displayed based on the search filters. Here, you can see the file identifier, prefix, File Name, the user who uploaded the file, Upload Data, status, Deleted Flag – which identifies if the file has been deleted, and the Upload URL.

Figure 10-26 Canvas Summary

File Uploads Summary									
File identifier	Profile	File Name	Uploaded By	Upload Date	Status	Deleted Flag	Upload URL	Upload Size	Notes
53057	prashant_singhania_80_06/26/2021_115547_almsvc@1306211-pw@DMP		ALMSQA	06/26/2021 06:27:25.980	Upload Successful	N	L:\msvc\upload\almsvc@1306211-pw@DMP\06-26-2021_115547_almsvc@1306211-pw@DMP.DMP	1.44KB	1.44KB (1440 bytes) uploaded successfully. File name: 06-26-2021_115547_almsvc@1306211-pw@DMP.DMP
53058	harvinder_bhatnagar_80_06/26/2021_115545_almsvc@1306211-pw@DMP		ALMSQA	06/26/2021 06:51:51.704	Upload Successful	N	L:\msvc\upload\almsvc@1306211-pw@DMP\06-26-2021_115545_almsvc@1306211-pw@DMP.DMP	1.44KB	1.44KB (1440 bytes) uploaded successfully. File name: 06-26-2021_115545_almsvc@1306211-pw@DMP.DMP
53059	vineet_jain_80_06/26/2021_112401_almsvc@1306211-pw@DMP		ALMSQA	06/26/2021 06:45:40.647	Upload Successful	N	L:\msvc\upload\almsvc@1306211-pw@DMP\06-26-2021_112401_almsvc@1306211-pw@DMP.DMP	1.44KB	1.44KB (1440 bytes) uploaded successfully. File name: 06-26-2021_112401_almsvc@1306211-pw@DMP.DMP
53110	DEP_80_06/26/2021_124879_almsvc@1306211-pw@DMP		ALMSQA	06/26/2021 07:08:40.407	Upload Successful	N	L:\msvc\upload\almsvc@1306211-pw@DMP\06-26-2021_124879_almsvc@1306211-pw@DMP.DMP	1.44KB	1.44KB (1440 bytes) uploaded successfully. File name: 06-26-2021_124879_almsvc@1306211-pw@DMP.DMP
53062	hugoberto_80_06/26/2021_115612_almsvc@1306211-pw@DMP		ALMSQA	06/26/2021 10:56:58.789	Upload Successful	N	L:\msvc\upload\almsvc@1306211-pw@DMP\06-26-2021_115612_almsvc@1306211-pw@DMP.DMP	1.44KB	1.44KB (1440 bytes) uploaded successfully. File name: 06-26-2021_115612_almsvc@1306211-pw@DMP.DMP
53065	PR000_13066_80_07/07/2021_134719_almsvc@1306211-pw@DMP		ALMSQA	07/07/2021 06:19:06.711	Upload Successful	N	L:\msvc\upload\almsvc@1306211-pw@DMP\07-07-2021_134719_almsvc@1306211-pw@DMP.DMP	1.44KB	1.44KB (1440 bytes) uploaded successfully. File name: 07-07-2021_134719_almsvc@1306211-pw@DMP.DMP
53066	FCAS1_80_07/07/2021_114401_almsvc@1306211-pw@DMP		ALMSQA	07/07/2021 06:19:19.452	Upload Successful	N	L:\msvc\upload\almsvc@1306211-pw@DMP\07-07-2021_114401_almsvc@1306211-pw@DMP.DMP	1.44KB	1.44KB (1440 bytes) uploaded successfully. File name: 07-07-2021_114401_almsvc@1306211-pw@DMP.DMP
53067	80_80_07/07/2021_115801_almsvc@1306211-pw@DMP		ALMSQA	07/07/2021 06:19:27.816	Upload Successful	N	L:\msvc\upload\almsvc@1306211-pw@DMP\07-07-2021_115801_almsvc@1306211-pw@DMP.DMP	1.44KB	1.44KB (1440 bytes) uploaded successfully. File name: 07-07-2021_115801_almsvc@1306211-pw@DMP.DMP
53066	FCAS1_80_80_07/07/2021_115452_almsvc@1306211-pw@DMP		ALMSQA	07/07/2021 06:22:25.084	Upload Successful	N	L:\msvc\upload\almsvc@1306211-pw@DMP\07-07-2021_115452_almsvc@1306211-pw@DMP.DMP	1.44KB	1.44KB (1440 bytes) uploaded successfully. File name: 07-07-2021_115452_almsvc@1306211-pw@DMP.DMP

Groups and Roles

To open the Group and Users Report, from the LHS menu, select **Operational Analysis**, and then select **Groups and Roles**.

The Groups and Roles Report Reporting reports section is arranged as a set of canvases, classified into the following:

- Master Registry for Groups - Roles - Functions
- User to Groups Mapping
- Group to Roles Mapping
- Roles to Functions Mapping

Report Common Filters

You can use a series of canvas-level pinned Prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-27 Canvas Prompt Filters for Users, Groups and Roles

User Id	Group Code	Group Name	Role Name	Role Code	Function Code	Function Name
All	All	All	All	All	All	All

The following filters are available:

- **User ID:** To select/search for a specific user ID.
- **Group Code:** To select/search for a specific group code.
- **Group Name:** To select/search for a specific group name.
- **Role Name:** To select/search for a specific role name.
- **Role Code:** To select/search for a specific role code.
- **Function Code:** To select/search for a specific function code.
- **Function Name:** To select/search for a specific function name.

Report Data Action

The reports provide the capability to analyze data across canvases via a Data Action. The following are the Data Action Configuration details:

Figure 10-28 Data Action Configuration

Data Actions

Actions

▲ Analyze by User to Groups

Name: Analyze by User to Groups

Type: Analytics Link

Anchor To: Select Data

Target: This Workbook

Canvas Link: User to Groups Mapping

Pass Values: All

Supports Multiple Selection: On

▲ Analyze by Group to Roles

Name: Analyze by Group to Roles

Type: Analytics Link

Anchor To: Select Data

Target: This Workbook

Canvas Link: Group to Roles Mapping

Pass Values: All

Supports Multiple Selection: On

▲ Analyze by Role to Functions

Name: Analyze by Role to Functions

Type: Analytics Link

Anchor To: Select Data

Target: This Workbook

Canvas Link: Role to Functions Mapping

Pass Values: All

Supports Multiple Selection: On

Cancel

OK

You can analyze by User to Groups, Group to Roles, or Role to Functions.

Report Master Registry For Groups, Rules, Functions

The Master Registry for Groups-Roles-Functions, displays users mapped from the IAM into PBSMCS applications based on the user ID, user group, and related roles and functions, which are assigned to off the shelf groups.

Note that, IAM enables you to set up and manage users and groups, and assigns users to different user groups. You can also use the interactive charts available in the report to analyze the groups, roles, and functions for a given user.

Figure 10-29 Groups and Roles

[illegible]

User Group Mapping

In this canvas, you can view the User ID, Group Code, Group Name, and the Group Description. By using the User ID filter at top to search for a particular user, you can see the corresponding group name and description for the selected user.

Figure 10-30 User Group Mapping

Groups and Roles			Data Visualize Present	
User ID	Group Code	Group Name		
all	all	all		

Use to Show Groups

User ID	Group Code	Group Name	Group Desc
OPS_SVC_AU17	OPS_SVC_GRP	OPS Service Group	OPS Service Group
admin	IDENT_ADRB	Identity Administrator group	Identity Administrator group
admin	IDENT_AU19	Identity Authentication group	Identity Authentication group
admin	IDENT_ADRB	Proficiency Application Administrator	Proficiency Application Administrator
all	IDENT_ADRB	PACS R1 T0 - Data Viewset	PACS R1 T0 - Data Viewset
admin	IDENT_ADRB	PACS R1 B0 - Application Analyst	PACS R1 B0 - Application Analyst
admin	IDENT_ADRB	PACS R1 B0 - Data Viewset	PACS R1 B0 - Data Viewset
admin	IDENT_ADRB	PACS R1 B0 - Search Manager	PACS R1 B0 - Search Manager
admin	IDENT_ADRB	PACS R1 B0 - Product Manager	PACS R1 B0 - Product Manager
admin	IDENT_ADRB	PACS R1 B0 - Regional Manager	PACS R1 B0 - Regional Manager
admin	IDENT_ADRB	PACS R1 T0 - Application Analyst	PACS R1 T0 - Application Analyst
admin	IDENT_ADRB	PACS R1 T0 - Data Viewset	PACS R1 T0 - Data Viewset
admin	IDENT_ADRB	Proficiency Application Administrator	Proficiency Application Administrator
admin	IDENT_ADRB	PACS R1 T0 - Management/ LEO	PACS R1 T0 - Management/ LEO
admin	IDENT_ADRB	PACS R1 T0 - Log Feed	PACS R1 T0 - Log Feed
admin	IDENT_ADRB	PACS R1 T0 - Regional Manager	PACS R1 T0 - Regional Manager
admin	IDENT_ADRB	PACS R1 T0 - Update User Group	PACS R1 T0 - Update User Group
admin	IDENT_ADRB	PACS R1 B0 - Data Viewset	PACS R1 B0 - Data Viewset
admin	IDENT_ADRB	PACS R1 T0 - Data Viewset	PACS R1 T0 - Data Viewset
all	IDENT_ADRB	Identity Administrator group	Identity Administrator group
all	IDENT_AU19	Identity Authentication group	Identity Authentication group
all	IDENT_ADRB	Proficiency Application Administrator	Proficiency Application Administrator
all	IDENT_ADRB	Proficiency Application Analyst	Proficiency Application Analyst
all	IDENT_ADRB	Proficiency Application Analyst	Proficiency Application Analyst
all	IDENT_ADRB	Identity Administrator group	Identity Administrator group
all	IDENT_AU19	Identity Authentication group	Identity Authentication group

Group to Rules Mapping

In this canvas, you can filter using User ID, Group Code, Group Name, Role Code, and Role Name. For example, you can filter using a particular role name to view the groups assigned to that role.

Figure 10-31 Groups to Role Mapping

User ID	Group Code	Group Name	Role Code	Role Name	Role Desc
AI	AI	AI	AI	AI	AI
Groups to Roles Mapping					
Group Code	Group Name	Group Desc	Role Code	Role Name	Role Desc
IDENTY_ADAM	Identity Administrator group	Identity Administrator group	ADMIN_LINK	Admin Link Role	
IDENTY_ADAM	Identity Administrator group	Identity Administrator group	FLDR_ADV	Folders Advanced Role	
IDENTY_ADAM	Identity Administrator group	Identity Administrator group	FUNC_ADV	Function Advanced Role	
IDENTY_ADAM	Identity Administrator group	Identity Administrator group	GRP_ADV	Group Advanced Role	
IDENTY_ADAM	Identity Administrator group	Identity Administrator group	METABASE_ACE	Metabasing Access	
IDENTY_ADAM	Identity Administrator group	Identity Administrator group	ROLE_ADV	Role Advanced Role	
IDENTY_ADAM	Identity Administrator group	Identity Administrator group	USER_ADV	User Advanced Role	
IDENTY_AUTHN	Identity Authentication group	Identity Authentication group	ADMIN_LINK	Admin Link Role	
IDENTY_AUTHN	Identity Authentication group	Identity Authentication group	FLDR_AUTHN	Folders Authentication	Folders Authentication Role
IDENTY_AUTHN	Identity Authentication group	Identity Authentication group	FUNC_READ	Function Read Role	
IDENTY_AUTHN	Identity Authentication group	Identity Authentication group	GRP_READ	Group Read Role	
IDENTY_AUTHN	Identity Authentication group	Identity Authentication group	ROLE_READ	Role Read Role	
IDENTY_AUTHN	Identity Authentication group	Identity Authentication group	USER_READ	User Read Role	
IDENTY_AUTHN	Identity Authentication group	Identity Authentication group	ROLE_READ	Role Read Role	
IDENTY_AUTHN	Identity Authentication group	Identity Authentication group	USER_READ	User Read Role	
OPS_SRV_GRP	OPS Service Group	OPS Service Group	BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service
OPS_SRV_GRP	OPS Service Group	OPS Service Group	FLDR_ADV	Folders Advanced Role	
OPS_SRV_GRP	OPS Service Group	OPS Service Group	FLDR_WRITE	Folders Write Role	
OPS_SRV_GRP	OPS Service Group	OPS Service Group	OPS_SRV_GRP	OPS Service Role	OPS Service Role
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	BATCH_MAINT	Batch Maintenance Role	Batch maintenance role in scheduler service
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	BATCH_OPER	Batch Operation Role	Batch operation role in scheduler service
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	BATCH_READ	Batch Read Role	Batch read role in scheduler service
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	BATCH_WRITE	Batch Write Role	Batch write role in scheduler service
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	COMMON_CTS	COMMON CTS	User Group mapped will have access to Common Object Metadata Link and Summary
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	COMMON_CTS	COMMON CTS	User Group mapped will have access to Common Object Metadata
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	COMMON_CTS	COMMON CTS	User Group mapped will have access to add, edit, copy and delete Common Object Metadata
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	COMMON_CTS	COMMON CTS	User Group mapped will have access to Link and Summary
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	COMMON_CTS	COMMON CTS	User Group mapped will have access to Write Role
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	COMMON_CTS	COMMON CTS	User Group mapped will have access to View Definition
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	COMMON_CTS	COMMON CTS	User Group mapped will have access to add, edit, copy and delete Data Mapping
UAPRMLAN	PAC'S BI BI - Application Analyst	PAC'S BI BI - Application Analyst	FILE_DOWNLOAD	File Download Role	

Rule to Functions Mapping

This canvas displays all the functions mapped to the roles. You can filter based on User ID, Role Code, Role Name, Function Code and Function Name. For example, you can select a particular role, to view the role name, description, and the function assigned to that role.

Figure 10-32 Role to Functions Mapping

User ID	Role Code	Role Name	Function Code	Function Name	Function Desc
AI	AI	AI	AI	AI	AI
Functions mapped to Roles					
Role Code	Role Name	Role Desc	Function Code	Function Name	Function Desc
ADMIN_LINK	Admin Link Role	User Group mapped to this role will have access to Application Preferences Link and View the defined preferences	ADMIN_LINK	Admin Link	This gives access to administrative UI
APPREFACE	Application Preferences Access	User Group mapped to this role will have access to Application Preferences Link and View the defined preferences	APPREFACE	Application Preferences Access Function Code	This function gives access to preferences service
APPREFACE	Application Preferences Access	User Group mapped to this role will have access to Application Preferences Link and View the defined preferences	APPREFACEVIEW	Application Preferences Access View Function Code	This function gives access to view the preferences defined for admin user
APPREFACE	Application Preferences Access	User Group mapped to this role will have access to Application Preferences Link and View the defined preferences	APPREFACEVIEW	Application Preferences Access View Function Code	This function gives access to view the preferences defined for admin user
APPREFADAM	Application Preferences Admin Access	User Group mapped will have advanced access: Add, Edit, Copy, Delete	APPREFADAM	Application Preferences Admin Function Code	This function gives user access to define the preferences for admin user
APPREFADAM	Application Preferences Admin Access	User Group mapped will have advanced access: Add, Edit, Copy, Delete	APPREFADAMVIEW	Application Preferences Admin View Function Code	This function gives access to view the preferences defined for admin user
APPREFWRITE	Application Preferences Write	User Group mapped will have access to view and define application preferences	APPREFWRITE	Application Preferences Admin Function Code	This function gives user access to define the preferences for admin user
APPREFWRITE	Application Preferences Write	User Group mapped will have access to view and define application preferences	APPREFWRITEVIEW	Application Preferences Admin View Function Code	This function gives access to view the preferences defined for admin user
APPREFWRITE	Application Preferences Write	User Group mapped will have access to view and define application preferences	APPREFWRITEVIEW	Application Preferences Admin View Function Code	This function gives access to view the preferences defined for admin user
APPREFWRITE	Application Preferences Write	User Group mapped will have access to view and define application preferences	APPREFWRITEVIEW	Application Preferences Admin View Function Code	This function gives access to view the preferences defined for admin user
BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service	BATCH_ADD	Batch Add Function	Batch add function in scheduler service
BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service	BATCH_COPY	Batch Copy Function	Batch copy function in scheduler service
BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service	BATCH_DELETE	Batch Delete Function	Batch delete function in scheduler service
BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service	BATCH_EXECUTE	Batch Execute Function	Batch execute function in scheduler service
BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service	BATCH_MODIFY	Batch Modify Function	Batch modify function in scheduler service
BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service	BATCH_MOVE	Batch Move Function	Batch move function in scheduler service
BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service	BATCH_SCHEDULE	Batch Schedule Function	Batch schedule function in scheduler service
BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service	BATCH_SUMMARY	Batch Summary Function	Batch summary function in scheduler service
BATCH_ADV	Batch Advanced Role	Batch advanced role in scheduler service	BATCH_VIEW	Batch View Function	Batch view function in scheduler service
BATCH_AUTHN	Batch Authentication Role	Batch authentication role in scheduler service	FUNC_SUMMARY	Function Summary	This gives access to function summary
BATCH_AUTHN	Batch Authentication Role	Batch authentication role in scheduler service	BATCH_AUTHN	Batch Authentication Function	Batch authentication function in scheduler service
BATCH_AUTHN	Batch Authentication Role	Batch authentication role in scheduler service	BATCH_SUMMARY	Batch Summary Function	Batch summary function in scheduler service
BATCH_AUTHN	Batch Authentication Role	Batch authentication role in scheduler service	BATCH_VIEW	Batch View Function	Batch view function in scheduler service
BATCH_AUTHN	Batch Authentication Role	Batch authentication role in scheduler service	FUNC_SUMMARY	Function Summary	This gives access to function summary
BATCH_MAINT	Batch Maintenance Role	Batch maintenance role in scheduler service	BATCH_MODIFY	Batch Modify Function	Batch modify function in scheduler service
BATCH_MAINT	Batch Maintenance Role	Batch maintenance role in scheduler service	BATCH_SUMMARY	Batch Summary Function	Batch summary function in scheduler service
BATCH_MAINT	Batch Maintenance Role	Batch maintenance role in scheduler service	BATCH_VIEW	Batch View Function	Batch view function in scheduler service

Tables and Partitions

The Tables and Partitions Report displays all the tables, partitions, and subpartitions into PACS and PBSM schema for monitoring the details in the tables.

To open the Tables and Partitions Report, from the LHS menu, select **Operational Analysis**, and then select **Tables and Partitions**.

The Tables and Partitions reports section is arranged as a set of canvases, classified into the following:

- PA Tables and Partitions
- PA Tables and SubPartitions
- PBSM Tables and Partitions
- PBSM Tables and SubPartitions

Report Filters

You can use a series of canvas-level pinned Prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-33 Canvas Prompt Filters

Table Name	Partition Name	Subpartition Name
All	All	All

The following filters are available:

- **Table Name:** To select/search for a specific Table Name.
- **Partition Name:** To select/search for a specific Partition Name.
- **Subpartition Name:** To select/search for a specific Subpartition name.


PA Tables and Partitions

The ALL views show the Partitions as the case be in the PACS Schema.

The two target cloud charts present are: Table Name, Partition Name. You can click on a specific Table or Partition name in the Target Cloud chart to get finer level details on number of rows and checksum.

The table view details present: Table Name, Partition Name, RowCount, and CheckSum.


Figure 10-34 Operation Analysis - Tables and Partitions

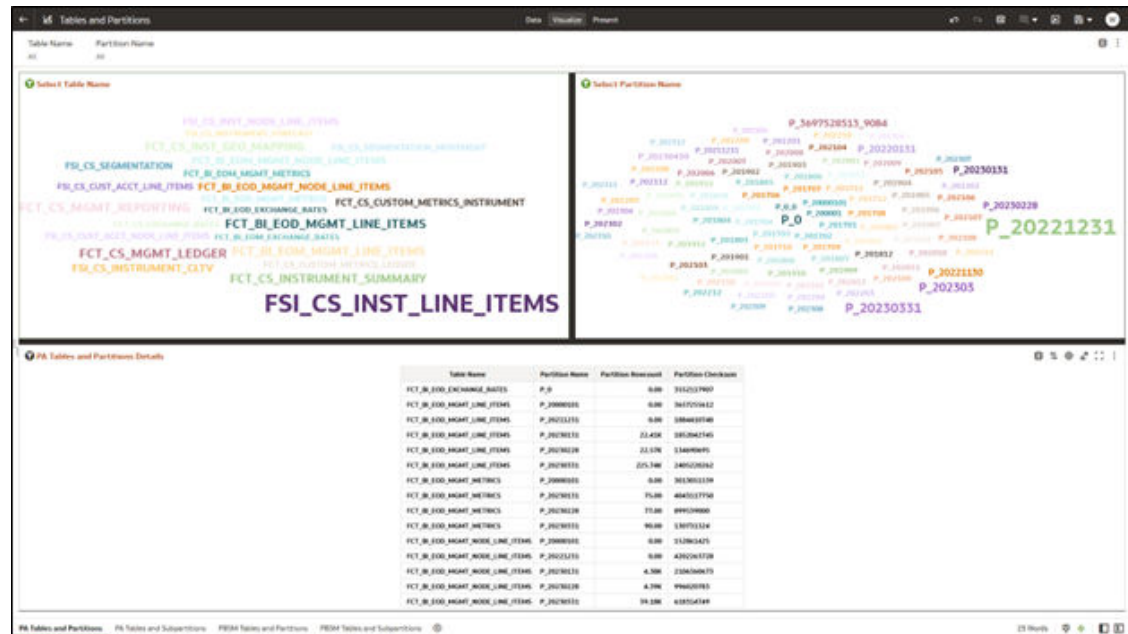

PA Tables and SubPartitions

The ALL views show the SubPartitions as the case be in the PACS Schema.


Figure 10-35 Operation Analysis - Profitability Analytics Cloud Service Tables and Partitions

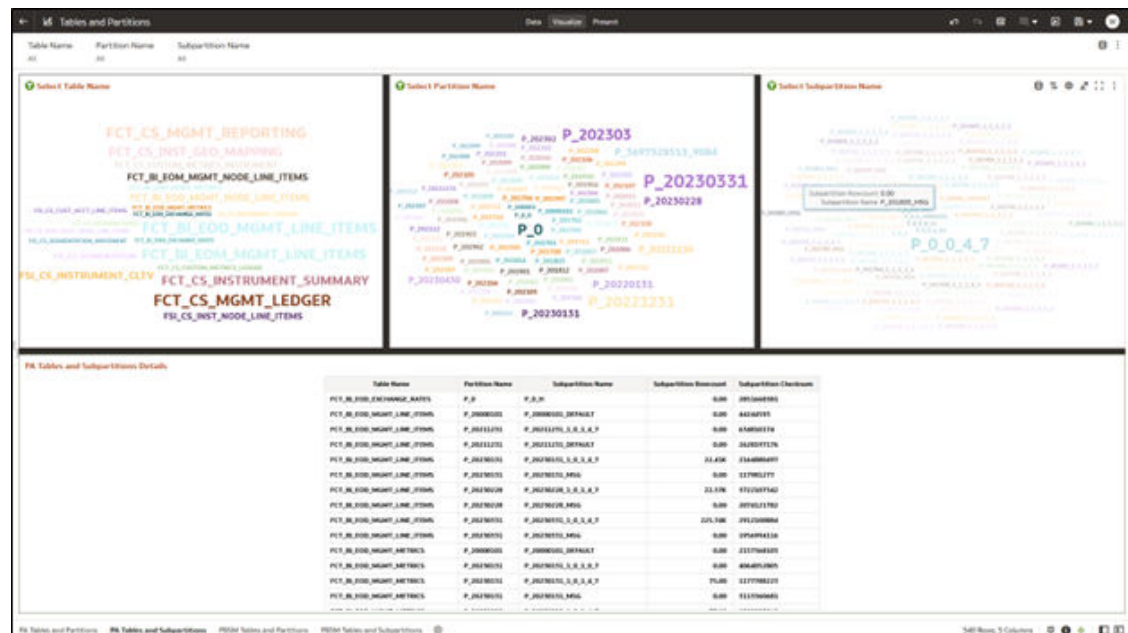

PBSM Tables and Partitions

The functionality of this canvas is similar to PACS canvas of the same name. The ALL views show the Partitions as the case in the PBSM Schema.


Figure 10-36 Profitability and Balance Sheet Management Cloud Service Tables and Partitions

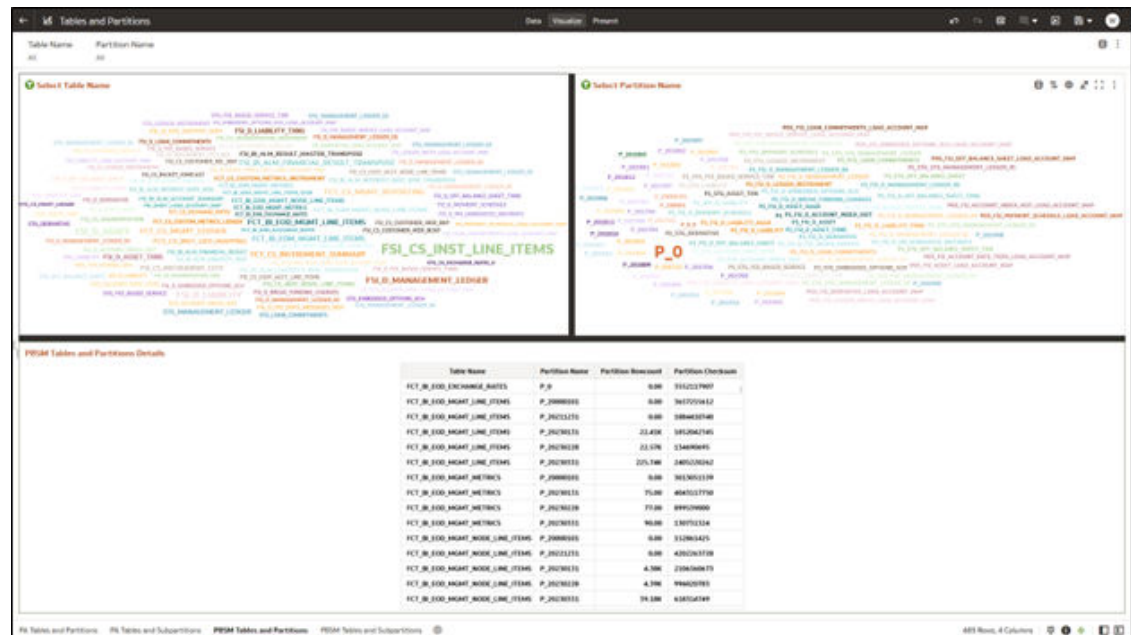

PBSM Tables and SubPartitions

The functionality of this canvas is similar to PACS canvas of the same name. The ALL views show the SubPartitions as the case in the PBSM Schema.


Figure 10-37 Profitability and Balance Sheet Management Cloud Service Tables and SubPartitions

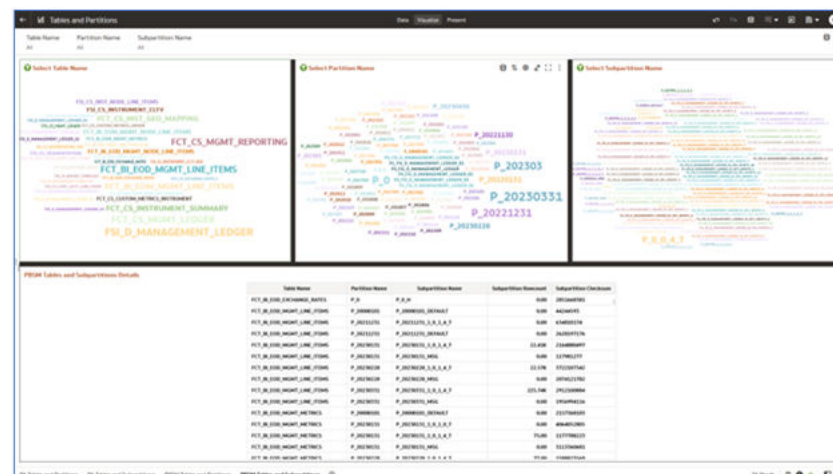

Runchart Execution

To access the **Runchart Executions** page, select **Analytics** from the LHS Menu, and then select **Runchart Executions**. Use the Runchart Executions page to monitor and analyze batch execution activity by execution date, table name, partition, and sub-partition. The page consists of filter fields, selection panels, and a details section.

Figure 10-38 Runchart Executions

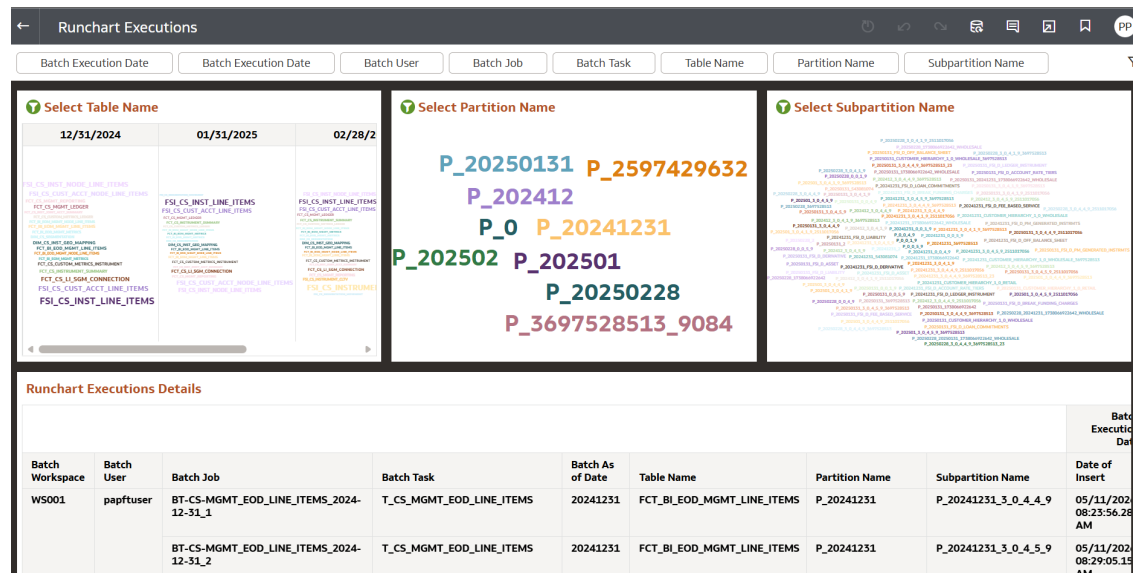

Filters

Use the filter fields at the top of the page to narrow the displayed execution data.

- Batch Execution Date
- Batch User
- Batch Job
- Batch Task
- Table Name
- Partition Name
- Subpartition Name

Selection Panels

The page contains three interactive panels used to visualize and select execution data. Each selection panel includes action menu items such as Sort By, Edit, and Export.

Select Table Name

- Displays table names associated with batch executions for selected execution dates. Table names are displayed as a word cloud. Hover over the table names to view Inserted Records, Batch Execution Date, and Table name.

- Selecting a table filters related partition and sub-partition data.

Select Partition Name

- Displays partition names related to the selected table.
- Partition names are displayed visually for analysis. Selecting a partition filters the related sub-partition information.

Select Sub-partition Name


- Displays sub-partition names associated with the table and selected partition.
- Use this panel to analyze execution activity at the sub partition level

Runchart Executions Details

- Displays detailed execution records for the selected filters and chart selections. The table includes the following information:
 - Batch Workspace
 - Batch User Batch
 - Job Batch
 - Task Batch
 - As of Date
 - Table Name
 - Partition Name
 - Sub-partition Name
 - Date of Insert

Data Level Security Registry

To access the **Data Level Security Registry** page, select **Analytics** from the LHS Menu, and then select **Data Level Security Registry**. Use the Data Level Security Registry page to view and manage data-level security assignments for users and dimensions. The page consists of a filter bar, selection panels, and a details section.

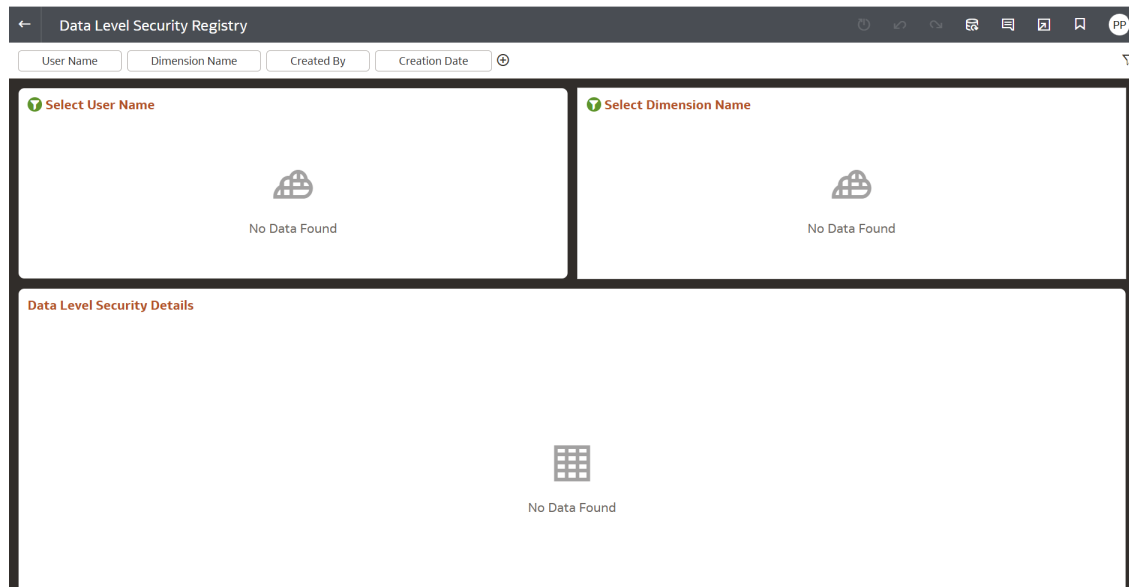Figure 10-39 Data Level Security Registry

Filters

Use the filter fields at the top of the page to search and filter security records.

- User Name
- Dimension Name
- Created By
- Creation Date

Selection Panels

The upper section of the page contains panels used to display and select security-related information. Each selection panel includes action menu items such as Sort By, Edit, and Export.

Select User Name

- Displays available users with assigned data-level security configurations.
- Select a user to view related dimension-level security details. Displays *No Data Found* when no records are available.

Select Dimension Name

- Displays dimensions associated with the selected user.
- Select a dimension to view detailed security assignments. Displays *No Data Found* when no records are available.

Data Level Security Details

- The lower section displays detailed data-level security records based on the selected filters and panel selections.
- The table provide the following details:
 - User information
 - Dimension assignments

- Security configuration details
- Creation
- Audit information
- If no matching records are available, the section displays *No Data Found*.

Usage Metering

To access the **Usage Metering** page, select **Analytics** from the LHS Menu, and then select **Usage Metering**.

Use the **Usage Metering** page to monitor application usage trends over time. The page consists of filter fields, a usage trend chart, and chart action menus.

Figure 10-40 Usage Metering



Filters

Use the filter fields at the top of the page to refine the displayed usage data.

- As of Date (Year)
- As of Date (Month)

Profitability Analytics – Usage Trend

The Profitability Analytics – Usage Trend chart represents the Number of Users for a selected month and year. The horizontal axis represents the reporting period. The vertical axis represents the usage count. Data values are displayed directly within the chart.

Actions Menu

Use the chart options menu to manage chart presentation and export settings. Action Menu items include:

- **Sort By:** Sort chart data using one or more fields, including such as:

- Number of Users
- As of Date (Month)
- Clear Sorts
- Custom
- **Zoom Chart:** Expand the chart for better view.
- **Edit:** Select Copy to copy the chart details to clipboard.
- **Export :**Export the chart in supported output formats.

Management Reporting

To access the PA Management Reporting canvas, select Analytics from the LHS Menu, and then select Management Reporting.

Note

Before generating reports and analytics, it is mandatory to set the relevant currencies and currency rates. This is required for generating the reports with correct values. For more information about creating currencies and currency rates, see the following:

- [Currencies](#)
- [Currency Rates](#)

Management Reporting is designed to provide timely and actionable Management Reports across organization, line of business, products, and legal entities. In addition to standard income statement and balance sheet reporting, you also get Risk Adjusted Performance Management (RAPM) reporting and scenario comparison analysis for profitability measures.

To feed the Management Reporting, refer to the *Oracle Financial Services Profitability Analytics Cloud Service Data Flow* document available at [Doc ID: 28694909.1](#).

For the Management Reporting, refer to the following Data Flow sub-sections:

- PACS – Management Ledger
- PACS – Management Reporting
- PACS – Management Line Items & Metrics

For Income Statement and Balance Sheet Hierarchies, or any other Hierarchy created out of Financial Element dimension, a Financial Element carrying a percentage value cannot be added as a child, Sibling to a child or Leaf under Parent/ Child/ Sibling in the Hierarchy. Users are expected to be mindful not to map a portfolio column to a FE denoting a rate or apply an expression, where a divisor is used in a way that the column value effectively becomes a rate, thus preventing a meaningful roll-up to the node of the hierarchy.

Management Ledger Based Reporting

You can use the Management Reporting section to perform analysis on summary Top Down numbers fed from the General Ledger.


The report provides you analysis on the Income Statement, its drivers, key profitability metrics and balances. Trends are available for all of them including comparisons with Budget and

Operating Plan. Analysis at the Organization Unit level including comparisons of the Top performing and bottom performing units are also provided.

The BI includes display of absolute values as well as growth rates over the previous available periods for key data elements. The Management Reporting reports section is arranged as a set of canvases, classified into the following:

- Top Down Summary
- Time
- Detailed IS
- Detailed BS
- Defined Org Unit

Figure 10-41 Management Ledger Based Reporting

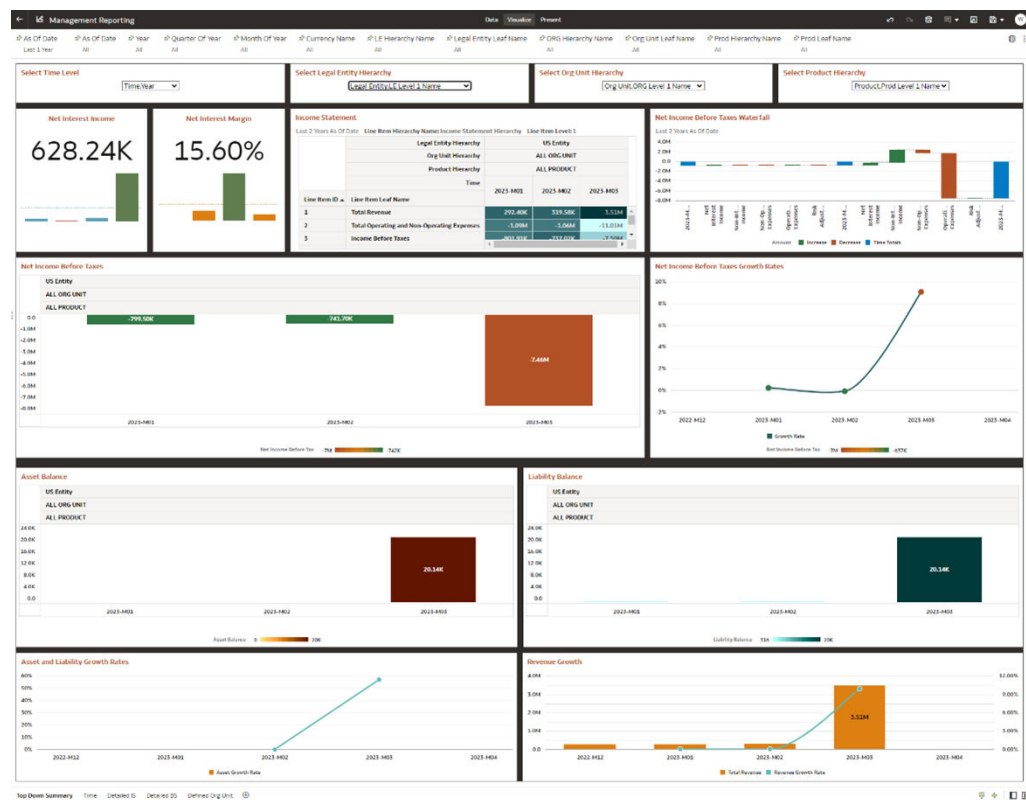

Report Common Filters


You can use a series of canvas level pinned Prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-42 Canvas Prompt Filters for Time Dimension



- **As of Date:** You can use this filter to isolate a selected timeframe for the analysis. The following screenshot displays the possible options that this filter provides against the Time Dimension.

Figure 10-43 As of Date Selection

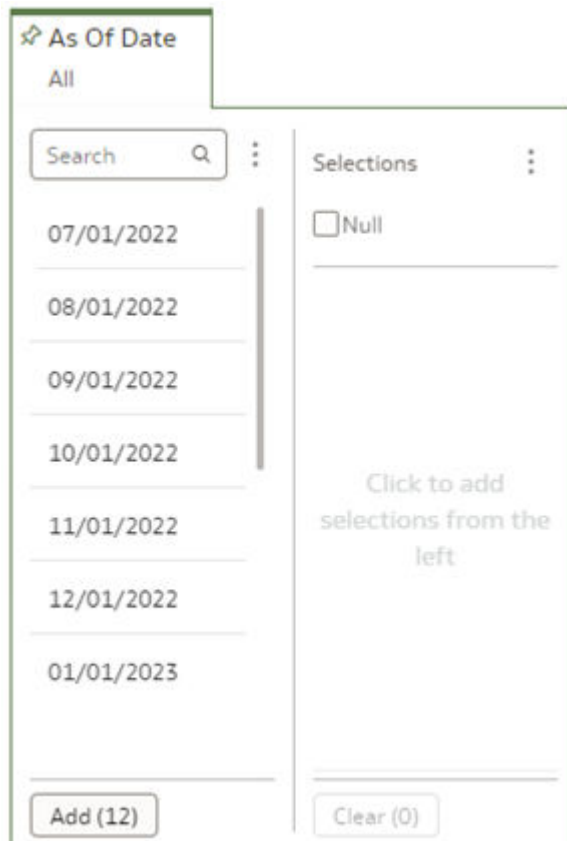

- Additional Filters for the Time Dimension as follows:
 - As of Date (Year)
 - As of Date (Day)
 - Year
 - Quarter of Year
 - Month of Year

Figure 10-44 Other Canvas Prompt Filters



- **Currency Name:** You can use this filter to select a specific Currency Code for the underlying preselected reporting currency.
- **Legal Entity Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Legal Entity Key Processing Dimension.

As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “LE Hierarchy Name” must be selected with only a single value simultaneously.

- **Legal Entity Leaf Name:** You can use this filter to select the Legal Entity Leaf Name that is related to the underlying Management Ledger data.
- **Org Unit Hierarchy Name:** This is a mandatory filter for the group filtering on Org Unit Key Processing Dimension. As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “Org Unit Hierarchy Name” must be selected with only a single value simultaneously.
- **Org Unit Leaf Name:** You can use this filter to select the Org Unit Leaf Name corresponding to the hierarchy.
- **Product Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Product Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “Prod Hierarchy Name” must be selected with only a single value simultaneously.
- **Product Leaf Name:** You can use this filter to select the Product Leaf Name corresponding to the hierarchy.

In canvas Variable Prompts

Figure 10-45 In-canvas Prompt Filters for Top Down Summary and Detailed Income Statement



- **Select Time Level:** You need to select Year/ Half Year/Quarter/ Month from this prompt to display the preference of the time block for the analysis.
- **Select Legal Entity Hierarchy:** You can use this filter to select the LE Level Name pertaining to the LE Hierarchy level, for rolling up the results on the underlying Legal Entity Leaves that are part of the selected hierarchy.
- **Select Org Unit Hierarchy:** You can use this filter to select the Org Unit Level Name pertaining to the Org Unit Hierarchy level, for rolling up the results on the underlying Org Unit Leaves that are part of the selected hierarchy.
- **Select Product Hierarchy:** You can use this filter to select the Product Level Name pertaining to the Product Hierarchy level, for rolling up the results on the underlying Product Leaves that are part of the selected hierarchy.

Figure 10-46 In-canvas Filters for Time and Defined Org Unit canvas



- **Select Income Statement Reporting Line:** This is a mandatory filter for the group filtering on the Income Statement reporting line dimension. The following filter values are available for selection:

- **Net Income Before Tax:** Net income before tax is the amount of profit made by the financial institution before income tax is paid. This figure is found by subtracting total expenses from total revenue.
- **Operating Expense:** Operating Expenses are expenses incurred by the bank or financial institution to carry out normal business operations.
- **Non Operating Expense:** A non-operating expenses are costs that are not directly related to core business operations of the bank. Typical examples of non-operating expenses for a bank are credit losses, recoveries, restructuring costs, write-offs and so on.
- **Total Revenue:** Total revenue is the total amount of income earned by the bank by selling products and services. It determines how well a company is bringing in money from its core operations of interest arbitrage and other income like fees and commissions.
- **Net Interest Income:** Net Interest Income (NII) is the difference between the revenue generated from a bank's interest-bearing assets and expenses incurred while paying its interest-bearing liabilities. A bank's assets consist of personal and commercial loans, mortgages, securities etc. A bank's liabilities typically consist of customer deposits.
- **Non Interest Income:** The non-interest income is the revenue generated by the banks and financial institutions, usually from the non-core activities (loan processing fee, late payment fees, credit card charges, service charges, penalties, etc. net off waivers).
- **Total Expense:** Total Expenses means the sum of cost of sales and operating expenses (general, administrative, sales and marketing expenses) and non-operating expenses.
- **Credit Loss Provision:** The provision for credit losses is an estimation of potential losses that a bank might experience due to credit risk. The provision for credit losses is treated as a non-operating expense on the company's financial statements.
- **Select Time Level:** You need to select Year/ Half Year/ Quarter/ Month from this prompt to display the preference of the time block for the analysis.
- **Select Legal Entity Hierarchy:** You can use this filter to select the LE Level Name pertaining to the LE Hierarchy level, for rolling up the results on the underlying Legal Entity Leaves that are part of the selected hierarchy.
- **Select Org Unit Hierarchy:** You can use this filter to select the Org Unit Level Name pertaining to the Org Unit Hierarchy level, for rolling up the results on the underlying Org Unit Leaves that are part of the selected hierarchy.
- **Select Product Hierarchy:** You can use this filter to select the Product Level Name pertaining to the Product Hierarchy level, for rolling up the results on the underlying Product Leaves that are part of the selected hierarchy.

Report Data Action

These reports provide the capability to analyze data across canvases via a data action. The following are the data action configuration details:

Figure 10-47 Data Action configuration in Top Down Summary canvas

Analyze By Time	Analyze By Detailed IS	Analyze By Defined Org unit
Name: Analyze By Time	Name: Analyze By Detailed IS	Name: Analyze By Defined Org unit
Type: Analytics Link	Type: Analytics Link	Type: Analytics Link
Anchor To: Select Data	Anchor To: Select Data	Anchor To: Select Data
Target: This Workbook	Target: This Workbook	Target: This Workbook
Canvas Link: Time	Canvas Link: Detailed IS	Canvas Link: Defined Org Unit
Pass Values: Custom	Pass Values: Custom	Pass Values: Custom
Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy Line Item Name Line Item Hierarchy	Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy	Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy
Supports Multiple Selection: On	Supports Multiple Selection: On	Supports Multiple Selection: On

From every chart available in “Top Down Summary”, except for “Net Interest Income” and “Net Interest Margin” charts, you can select a value, and then navigate to the Time, Detailed Income Statement and Defined Org Unit canvases.

In order to do so, with a right click on the chart selection, the data action option (Analyze) will appear for you to be able to pass on the data filters to the canvas that you select.

Figure 10-48 Data Action configuration in Time canvas

Analyze By Detailed IS	Analyze By Defined Org unit	Analyze By Top Down Summary	Analyze By Detailed BS
Name: Analyze By Detailed IS	Name: Analyze By Defined Org unit	Name: Analyze By Top Down Summary	Name: Analyze By Detailed BS
Type: Analytics Link	Type: Analytics Link	Type: Analytics Link	Type: Analytics Link
Anchor To: Select Data	Anchor To: Select Data	Anchor To: Select Data	Anchor To: Select Data
Target: This Workbook	Target: This Workbook	Target: This Workbook	Target: This Workbook
Canvas Link: Detailed IS	Canvas Link: Defined Org Unit	Canvas Link: Top Down Summary	Canvas Link: Detailed BS
Pass Values: Custom	Pass Values: Custom	Pass Values: Custom	Pass Values: Custom
Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy	Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy	Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy Line Item Name Line Item Hierarchy	Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy
Supports Multiple Selection: On	Supports Multiple Selection: On	Supports Multiple Selection: On	Supports Multiple Selection: On

From every chart available in the Time canvas, you can select a value, and then navigate to the Detailed Income Statement, Defined Org Unit canvas, Top Down Summary and Detailed BS.

In order to do so, with a right-click on the chart selection, the data action option (Analyze) will appear for you to be able to pass on the data filters to the canvas that you select.

Figure 10-49 Data Action configuration in Detailed Income Statement canvas

Analyze By Time	Analyze By Defined Org unit	Analyze By Top Down Summary
Name: Analyze By Time	Name: Analyze By Defined Org unit	Name: Analyze By Top Down Summary
Type: Analytics Link	Type: Analytics Link	Type: Analytics Link
Anchor To: Select Data	Anchor To: Select Data	Anchor To: Select Data
Target: This Workbook	Target: This Workbook	Target: This Workbook
Canvas Link: Time	Canvas Link: Defined Org Unit	Canvas Link: Top Down Summary
Pass Values: Custom	Pass Values: Custom	Pass Values: Custom
Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy Line Item Name Line Item Hierarchy	Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy	Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy Line Item Name Line Item Hierarchy
Supports Multiple Selection: On	Supports Multiple Selection: On	Supports Multiple Selection: On

Note that although Line Item Name and Hierarchy appear as a pass value, tool limitation currently limits passing these values to the other canvases.

In order to invoke Data Action within Detailed Income Statement report, with a right click on the reporting line selection, the data action option will appear for you to be able to navigate further to the canvas that you select.

Figure 10-50 Data Action configuration in Defined Org Unit canvas

Analyze By Time	Analyze By Detailed IS	Analyze By Top Down Summary
Name: Analyze By Time	Name: Analyze By Detailed IS	Name: Analyze By Top Down Summary
Type: Analytics Link	Type: Analytics Link	Type: Analytics Link
Anchor To: Select Data	Anchor To: Select Data	Anchor To: Select Data
Target: This Workbook	Target: This Workbook	Target: This Workbook
Canvas Link: Time	Canvas Link: Detailed IS	Canvas Link: Top Down Summary
Pass Values: Custom	Pass Values: Custom	Pass Values: Custom
Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy Line Item Name Line Item Hierarchy	Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy	Time Legal Entity Hierarchy Org Unit Hierarchy Product Hierarchy Line Item Name Line Item Hierarchy
Supports Multiple Selection: On	Supports Multiple Selection: On	Supports Multiple Selection: On

From every chart available in the Defined Org Unit canvas, you can select a value, and then navigate to the Time, Detailed Income Statement or Top Down Summary canvases.

In order to do so, with a right click on the chart selection, the data action option will appear for you to be able to navigate to the canvas you selected.

Figure 10-51 Data Action configuration in Detailed BS

From every chart available in the Detailed BS canvas, you can select a value, and then navigate to the Time, Detailed Income Statement Defined Org Unit, or Top Down Summary canvas.

In order to do so, with a right-click on the chart selection, the data action option will appear for you to be able to navigate to the canvas you selected.

Using a Sample Data Action

The following two screenshots are showing the procedure you have to follow; the first one shows how to perform the data action on a specific selection, and the second one the result of this Data Action Navigation.

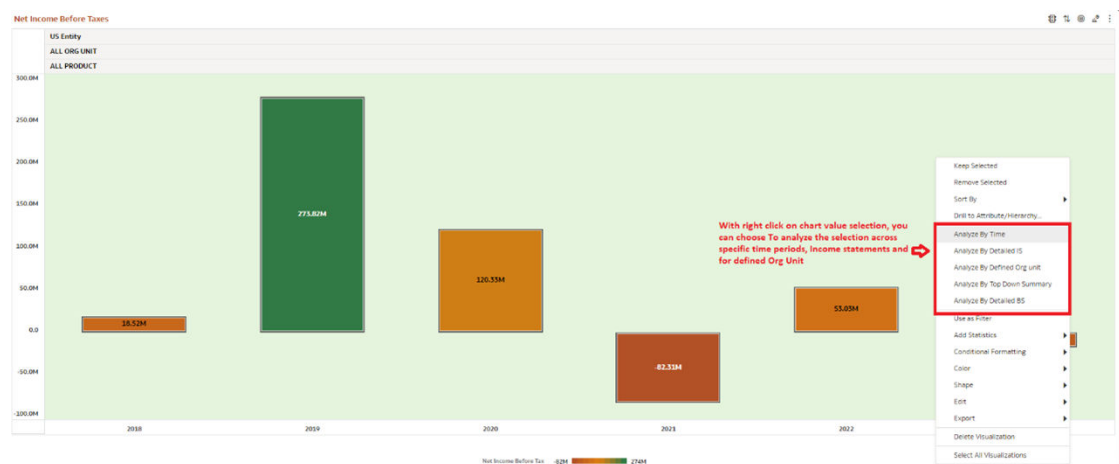
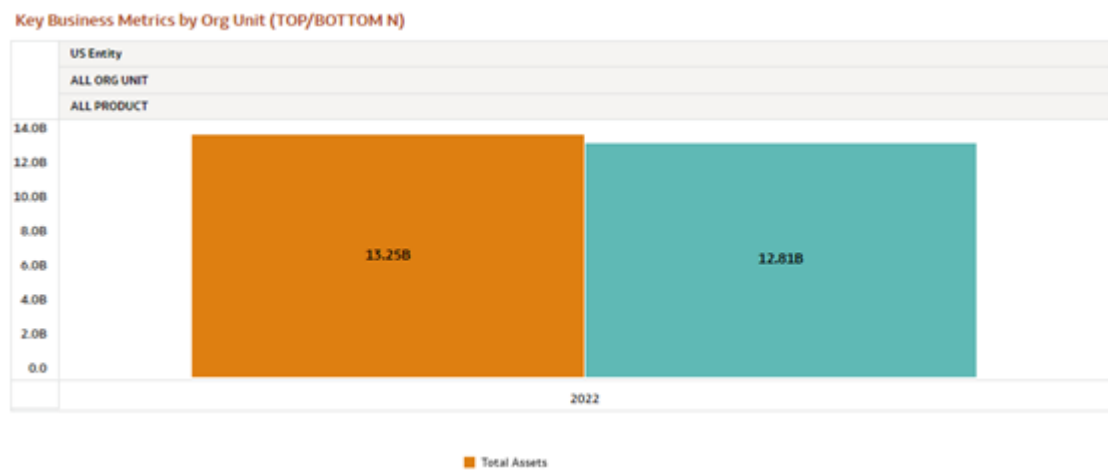
Figure 10-52 Use Data Action to Navigate to Defined Org Unit from Top Down Summary

Figure 10-53 Result of Data Action Navigation


Top Down Summary

The Top Down Summary Report provides a view of the descriptive analytics related to the heads of Income and Expenses.

You can use a series of Report Prompts, as previously described, to filter the data according to key attributes pertaining to the underlying Management Ledger tables. The canvas provides a summary view to key management reports for better performance tracking and profitability management. Distribution of Assets and Liabilities at enterprise and Income statement Analysis at enterprise/ Legal entity, Org Unit, and Product level along with Impact of on NII and NIM.

The report displays the underlying data according to the following Charts' logic:

- Net Interest Income and Net Interest Margin:** The chart displays the absolute value for the Net Interest Income and the Net Interest Margin as a percentage for the selected time level. NIM is usually Net Interest Income expressed as a percentage that is, it is the net interest income a bank or financial institution earns in percentage terms on the average interest-earning assets in a specified period.

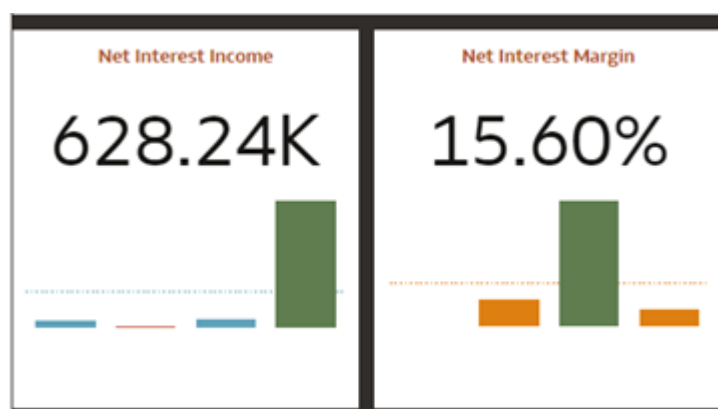Figure 10-54 Net Interest Income and Net Interest Margin

Income Statement: The income statement is a financial statement that shows you the bank's income and expenditures. It also shows whether the bank is making profit or loss for the given period. The Top Down Summary canvas displays a summary Income statement showing selected reporting lines with a dedicated canvas for the detailed statement showing reporting lines at multiple levels. Using the filter prompt in the chart you can select the 2 periods you want to compare.

Figure 10-55 Income Statement




Net Income Before Taxes Waterfall: The NIBT waterfall shows the incremental contribution of the displayed reporting lines over the base period that has been selected as the comparison point. For this report, the default view is of the last two time periods.


Figure 10-56 Net Income Before Taxes Waterfall



Net Income Before Taxes: The chart displays the absolute value for the Net Income Before Taxes for the selected time period/s. The default view of this chart is for the last 5 years from the current As-of-Date.

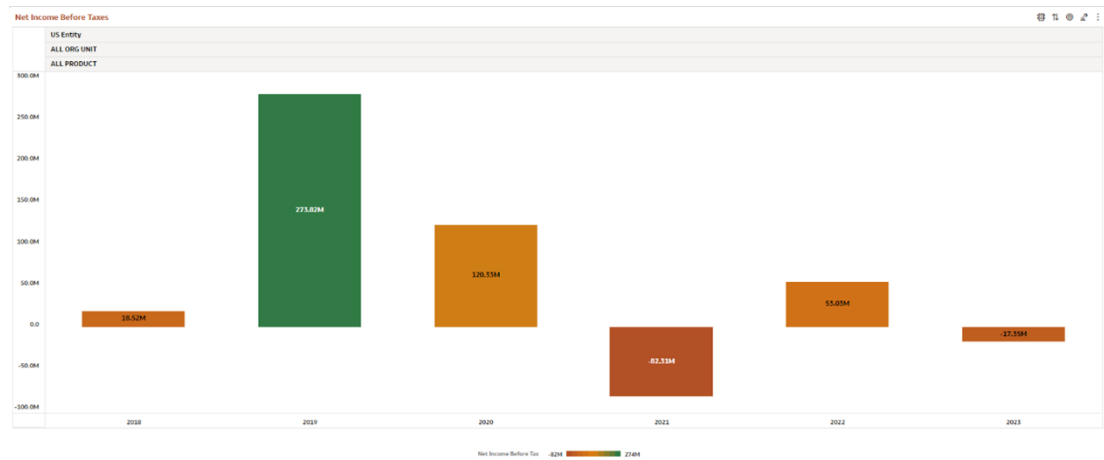
Figure 10-57 Net Income Before Taxes

Net Income Before Taxes Growth Rates: The chart displays the relative percentage variation of NIBT that is calculated over the previous period available as per the selection.

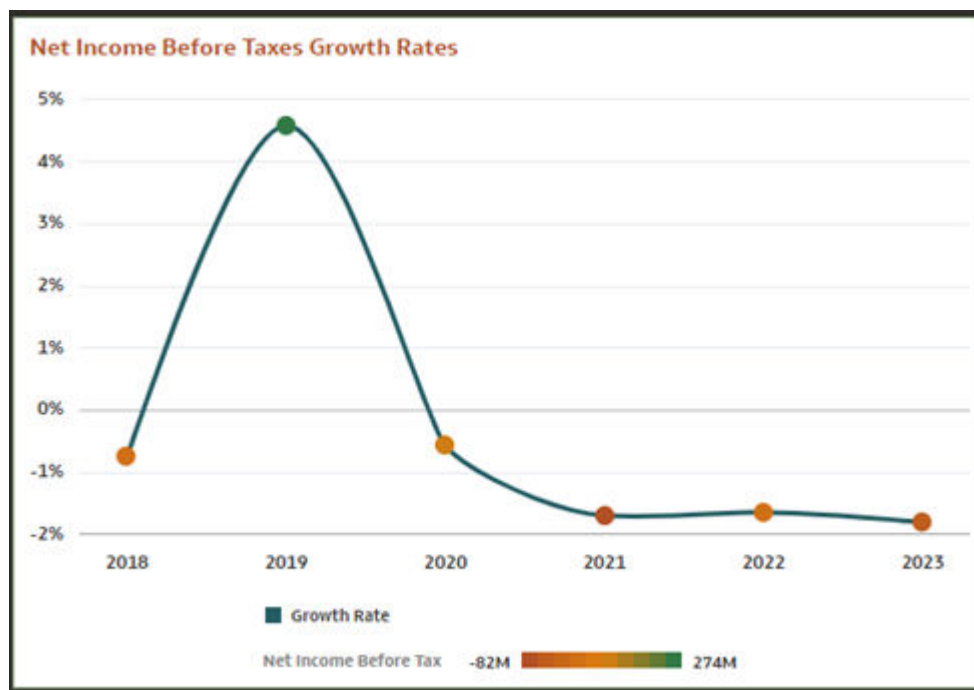Figure 10-58 Net Income Before Taxes Growth Rates


Asset Balance: The chart displays the absolute value for Asset Balances for the selected time period/s. The default view of this chart is for the last 5 years from the current As-of-Date.

Figure 10-59 Asset Balance

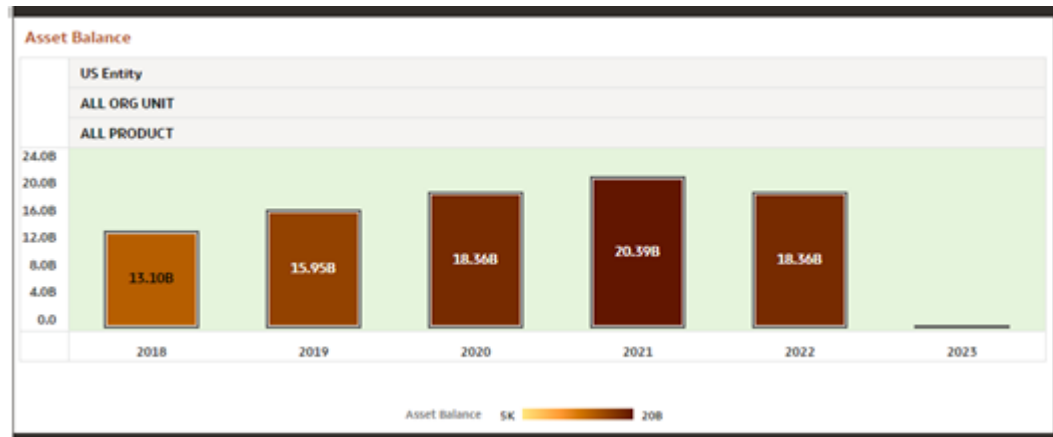

Liability Balance: The chart displays the absolute value for Liability Balances for the selected time period/s. The default view of this chart is for the last 5 years from the current As-of-Date.

Figure 10-60 Liability Balance

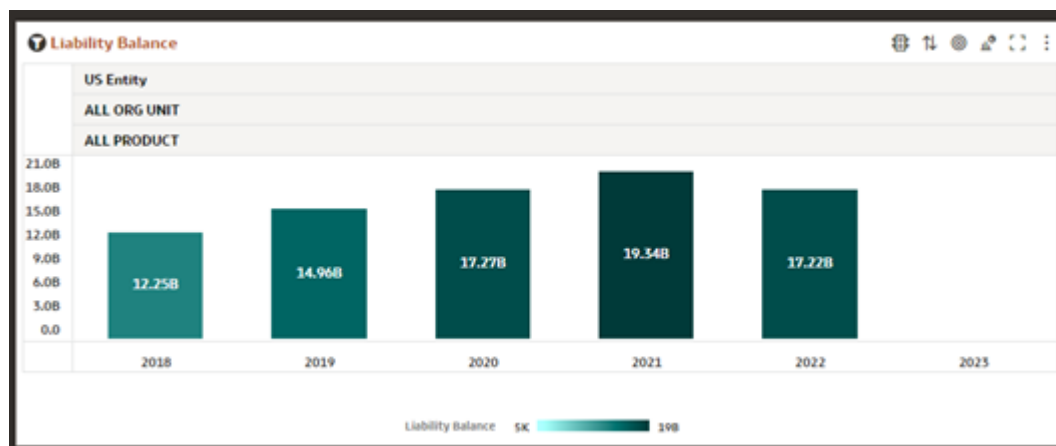

Asset and Liability Balance Growth Rates: The chart displays the relative percentage variation of Asset and Liability balance values that is calculated over the previous period available as per the selection. The default view of this chart is a comparison over the past 5 years.

Figure 10-61 Asset and Liability Balance Growth Rates



Time

The Time Report allows you to track profitability trends and reporting line trends based on key dimensions, conduct scenario analysis at an aggregated level to gauge profitability variations with Budget and Operating plan. In addition, you can compare actual performance with budgeted/forecasted report.

KPIs are reported across time along with the comparison with plan report users are able to monitor performance, analyze specific metrics, and compare them to budgets or specific benchmarks. They can spot deviations and take corrective action. Opportunities to improve performance can also be identified. The DV tool provides visual representations focusing on the variations observed.

Figure 10-62 Management Reporting

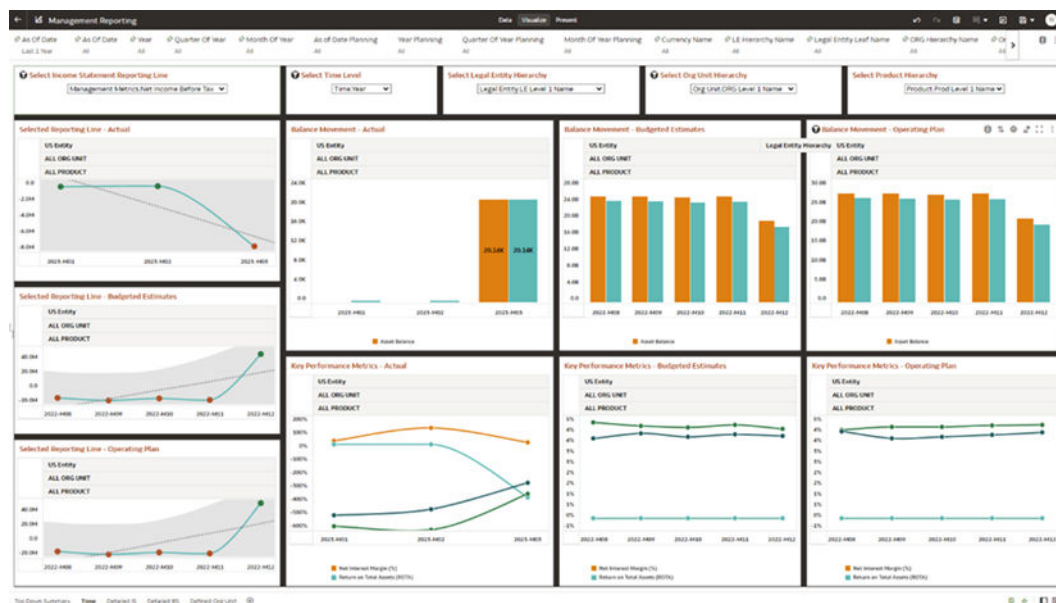


Figure 10-63 Selected Income Statement Reporting Lines


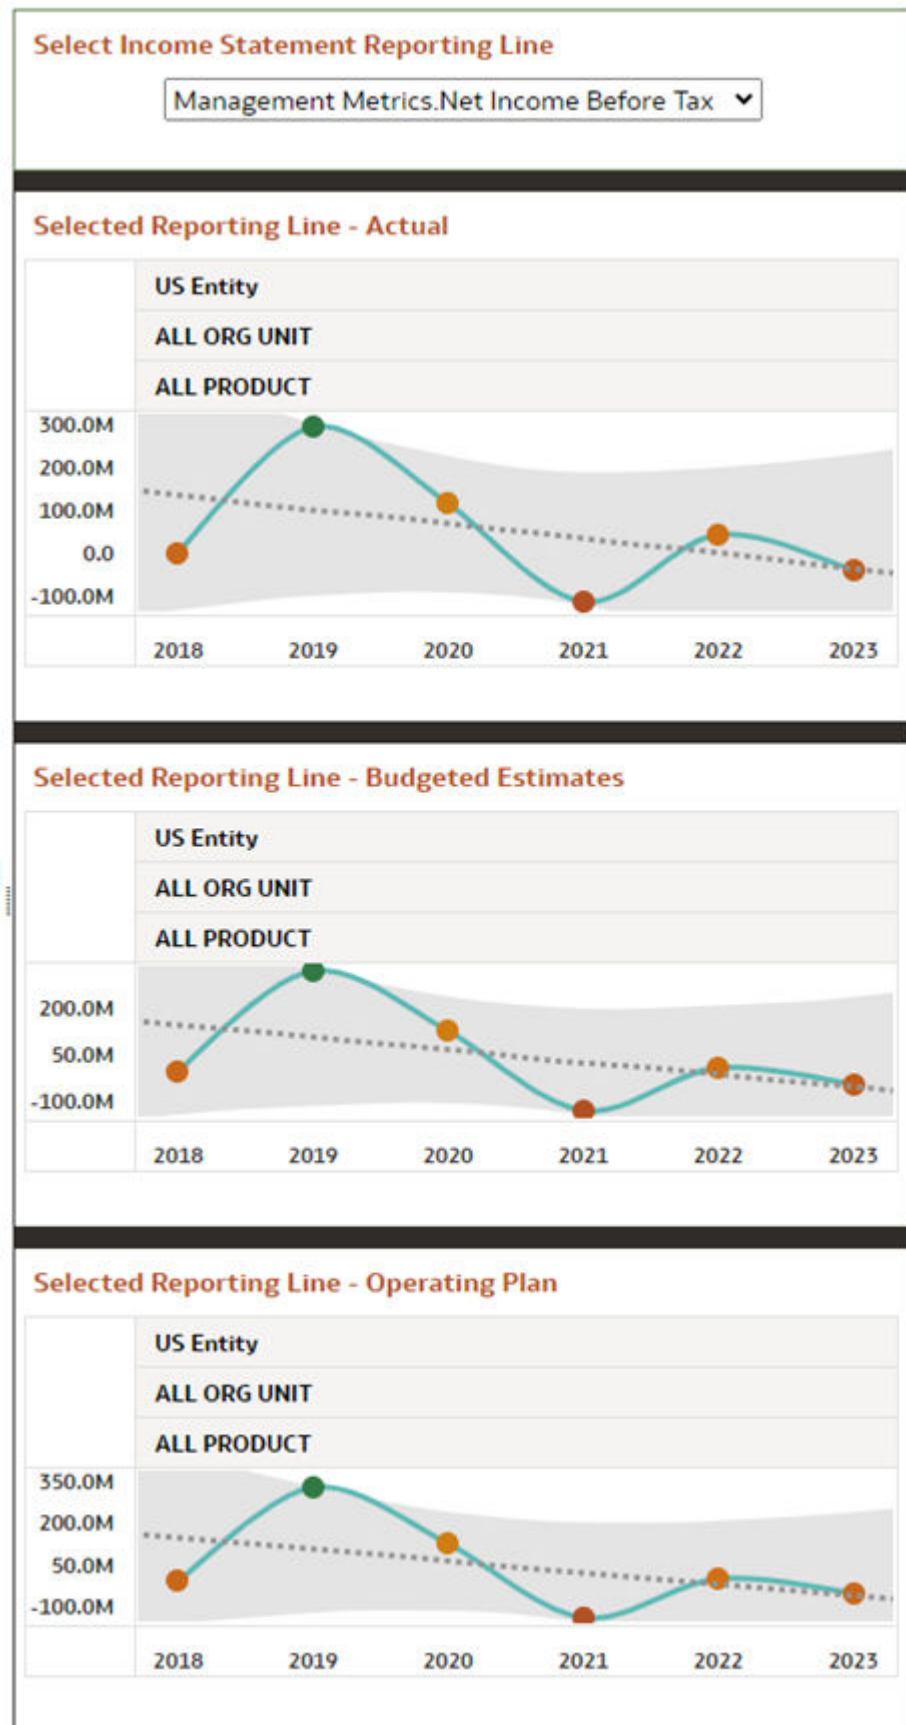


Figure 10-64 Overall Balances



- **Key Performance Metrics:** The following Key Performance Metrics can be observed from these set of charts.
 - **Net Interest Margin:** NIM is usually Net Interest Income expressed as a percentage that is, it is the net interest income a bank or financial institution earns in percentage terms on the average interest-earning assets in a specified period.
 - **Return on Total Assets:** Return on Total Assets (ROTA) is a ratio that measures a company's earnings before taxes (NIBT) relative to its total Assets. It is expressed as a percentage.

Figure 10-65 Key Performance Metrics

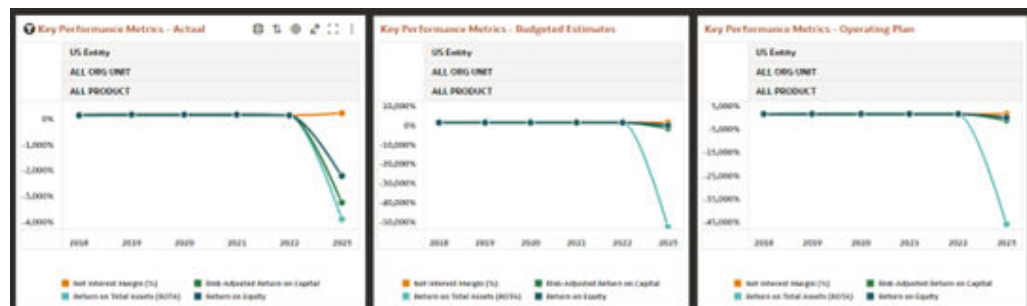

The canvas displays the comparisons of the following scenarios:

- **Actual:** These are actual metric and performance numbers as reported by the bank in their financial statements. These numbers are the outcomes of operations and business strategy that have been executed in the past.
- **Budget:** A budget's primary goal is to determine how many resources to allocate to each Business Unit. A fallout of the budgeting exercise are specific expectations around revenue and expected reporting lines as well as financial metrics. Budget numbers thus make business units at different levels responsible for the variances with actual numbers.
- **Operating Plan:** An operating plan is a financial snapshot of the business in future, as it is best understood today. The result is a forecast of how the business is trending taking into account the latest performance drivers. The banks operating plan is updated regularly. In this way, executives can make changes in real time, adjusting their product strategy, market position, marketing approach, and staffing to minimize variance with budget numbers.

Detailed IS

The Detailed Income Statement Report as it implies details the granular level reporting lines of the P&L of a bank. Time-series reporting of the income statement, with respect to the last five time periods selected are provided at the granularity of month.

Details of the revenue and expenses lines makes it possible to identify the inconsistencies in these values over time. You can use a series of Report Prompts, as previously described, to filter the data.

The report displays the underlying data according to selection of Levels 2 through 8 that can be done in the chart selection. The default view of the report has the levels 2-5 pre-selected, which has the same view as in the Income Statement Summary on the Top Down canvas.

- **Levels 2-5**
 - Total Revenue
 - Net Interest Income
 - Non-Interest Income
 - Total Operating and Non-Operating Expenses
 - Operating Expenses
 - Non-Operating Expenses
 - Income before Taxes
 - Provisions for Credit Losses
 - Net Income Before Taxes
 - Tax Expense
- **Level 6**
 - Total Interest Income
 - Total Interest Expense
 - Non-Interest Revenue
 - Indirect Non-interest Income
 - Other Revenue
 - Advertising and Marketing
 - Processing Expenses
 - Sales and Marketing Expenses
 - Product Management Expenses
 - Business Management Expenses
 - Indirect Processing Expense
 - Indirect Distribution Expense
 - Deposit Insurance
 - Other Allocated Costs
 - Net Credit Losses
- **Level 7**

- Agency Fees
- Print and Production Expenses
- Sales Commissions
- Product Development Expenses
- Miscellaneous Product Management Expenses
- Brand Management Expenses
- Miscellaneous Business Management Expenses
- Technology and Infrastructure Expenses
- Staff Costs
- Depreciation
- Amortization
- Income from Discontinued Operations, Net of Taxes
- Other Expense
- Allocated Indirect Expenses
- Allocated Non-cash Expenses
- Credit Losses
- Recoveries of amounts previously written-off
- **Level 8**
 - Other Income - Non-Customers
 - Allocated Other Income - Non-Customers
 - Total Brand Management Expenses
 - Business Promotion Expenses
 - Origination Expenses
 - Servicing Expenses
 - Collection Expenses
 - Direct Sales Expenses
 - Other Campaign Expenses
 - Miscellaneous Sales Expenses
 - Advertising Expenses
 - Credit for Other Allocated Liabilities
 - Credit for Liquidity
 - Amortization of Discount for Liability
 - Central Bank Int. Income
 - Credit for Float
 - Transfer Pricing Credit
 - Customer Break Funding Fees
 - Amortization of Premium for Asset
 - Amortization of Premium for Liability

- Amortization of Discount for Asset
- Transfer Pricing Charge
- Pricing Incentive
- Charge for Basis Risk
- Charge for Central Bank Reserves
- Charge for Liquidity
- Charge for Optionality
- Charge for Other Allocated Assets
- Commission
- Fees
- Penalties
- Other Income - Customers
- Waived Fees
- Early Redemption Fee
- Investment Income
- Branch Origination Expenses
- Mail Origination Expenses
- Phone Origination Expenses
- Loan Center Origination Expenses
- Origination Expenses, Other Channels
- Branch Platform Expenses
- Branch Teller Expenses
- In Network ATM Expenses
- Out of Network ATM Expenses
- Call Center Expenses
- E-Banking Expenses
- Statement Processing Expenses
- Loan Processing Expenses
- Compliance Expenses
- Commission on Collections
- Other Collection Expenses
- Amortization of Restructuring Expenses
- Gain or Loss on Sale of Assets from Discontinued Operations
- Income from Discontinued Operations
- **Level 9**
 - Credit for Equity
 - Economic Provision
 - Executive and Other Overhead Expenses

— Other Processing Expenses

Figure 10-66 Detailed IS Report Default


Income Statement

Line Item Hierarchy Name: Income Statement Hierarchy Line Item Level: 0, 1, 2, 5

		Legal Entity Hierarchy		US Entity		
		Org Unit Hierarchy		ALL ORG UNIT		
		Product Hierarchy		ALL PRODUCT		
		Time		2023-M01	2023-M02	2023-M03
Line Item ID ▲	Line Item Name					
0	Income Statement					
1	Total Revenue					
1.1	Net Interest Income					
1.1.1	Total Interest Income					
1.1.2	Primary FTP Charges					
1.1.3	Other FTP Charges					
1.1.4	Primary FTP Credits					
1.2	Non-Interest Income					
2	Total Operating and Non-Operating Expenses					
2.1	Operating Expenses					
2.2	Non-Operating Expenses					
3	Income Before Taxes					
4	Risk Adjustments					
4.1	Charges					
4.2	Credits					
5	Net Income Before Taxes					
6	Taxes					
7	Net Income After Taxes					


In this chart, you can look at how each Income Statement line item varies with respect to the absolute value during the previous time period.

Figure 10-67 Income Statement Line Item Variance Report

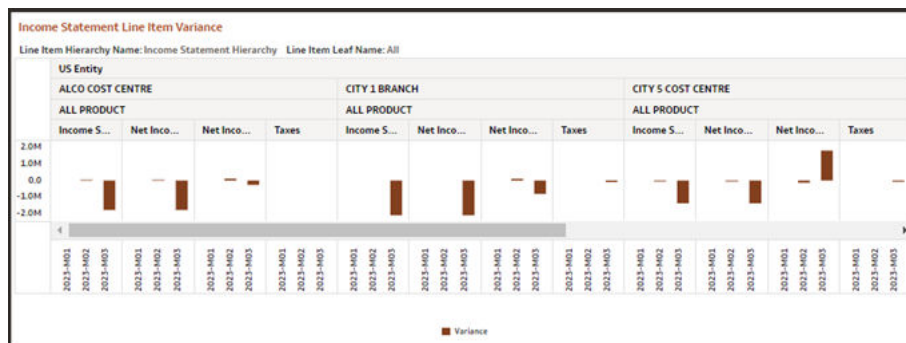

In this chart, you can look at how each Income Statement line item varies with respect to the percentage variation in absolute value when compared with the previous time period.

Figure 10-68 Income Statement Line Item Variance % Report

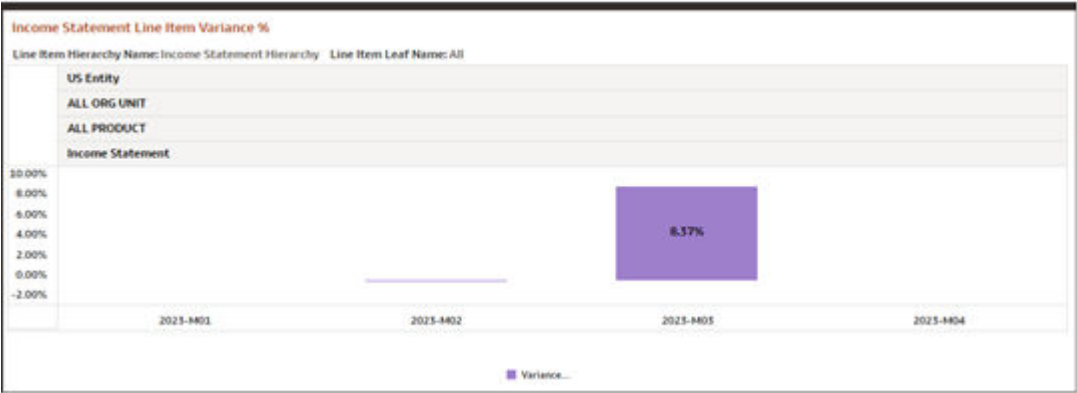

Detailed BS

The Detailed Balance Sheet Report as the name implies provides a view of the balance sheet which captures details around all the line items. The user can use the level selection filter to expand or contract the balance sheet.

Figure 10-69 Detailed BS Report Default

Balance Sheet

Line Item Hierarchy Name: Balance Sheet Hierarchy Line Item Level: 0, 1, 2, 3

		Legal Entity Hierarchy		US Entity	
		Org Unit Hierarchy		ALL ORG UNIT	
		Product Hierarchy		ALL PRODUCT	
		Time			
				2023-M01	2023-M02
				2023-M03	
Line Item ID	Line Item Name				
0	Balance Sheet	672.62K	669.35K	6.29M	
1	Primary Balances	109.06K	107.37K	971.20K	
2	Other Balances	141.16K	140.47K	3.32M	
3	Allocated Balances	422.40K	421.51K	5.91M	
4	Allocated Assets	105.65K	115.10K	991.04K	
5	Allocated Liabilities	45.01K	32.37K	504.46K	
6	Allocated Equity	234.75K	255.68K	2.34M	
7	Allocated Equity - Regulatory	41.01K	58.56K	272.52K	

The Balance Sheet line item variance and variance % reports work in the same way as in the case of the Detailed Income Statement canvas.

Figure 10-70 Balance Sheet Line Items Variance and Line Item Variance %


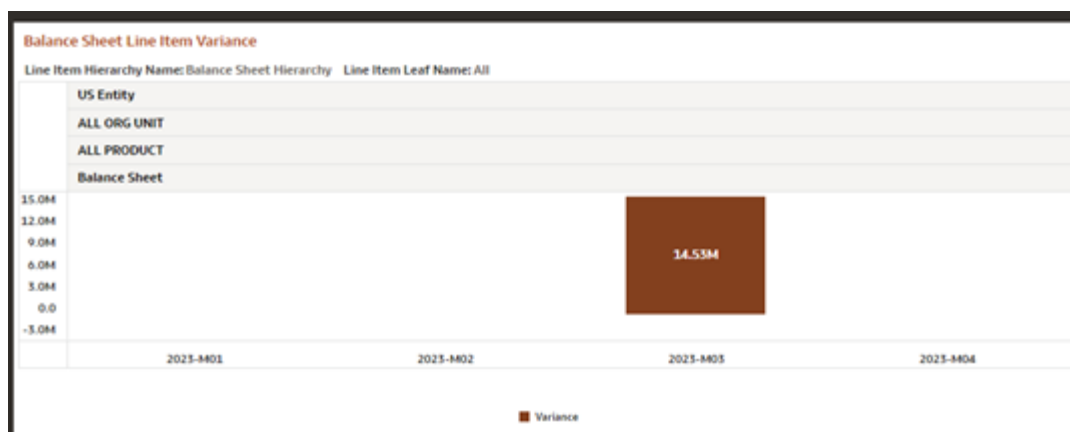


Figure 10-71 Balance Sheet Item Variance % Report

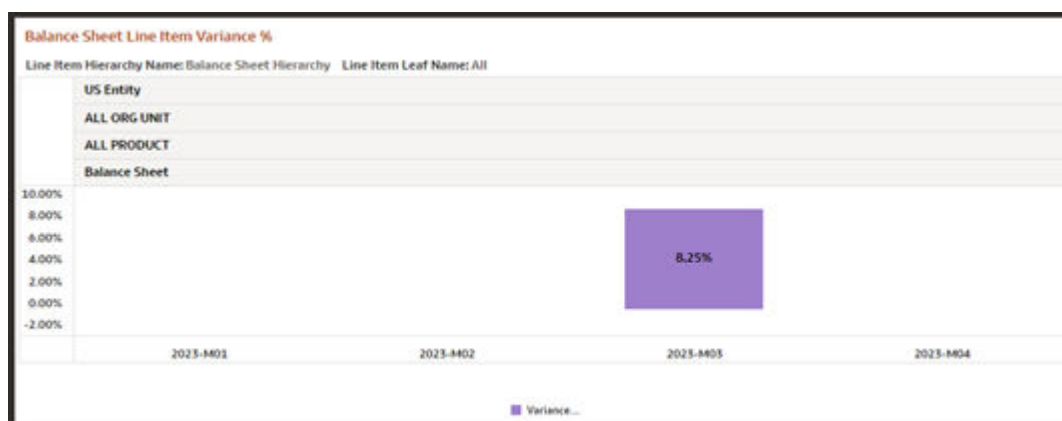


Defined Org Unit

The Defined Org Unit report provides a view of the Top Down Ledger Data for different Organizational Units. The canvas empowers all org owners to access actionable profitability insight directly. The users can then assess risk-adjusted metrics such as return on assets (ROTA), return on Net Interest Margin (NIM), risk-adjusted return on capital (RAROC) or key performance indicators such as top 10 products by balance growth.

You can use a series of Report Prompts, as previously described, to filter the data. In addition, there are In-Report prompt selections to select the Top/ Bottom N org units that you are interested in, and the corresponding data will be displayed.


The report displays the underlying data according to the following Charts:

- Org Unit wise contribution for Reporting Line (TOP N); the same is available for bottom view**
 In this chart, for the selected reporting line, the Top N (N selected from the chart prompt) and bottom N organization units are displayed in descending order of value of the reporting line.


Figure 10-72 Income Statement Reporting Line

The report displays the underlying data according to the following Charts:

- **Org Unit wise contribution for Reporting Line (TOP/ BOTTOM N):** The same is available for bottom view In this chart, for the selected reporting line, the Top N (N selected from the chart prompt) and bottom N organization units are displayed in descending order of value of the reporting line.

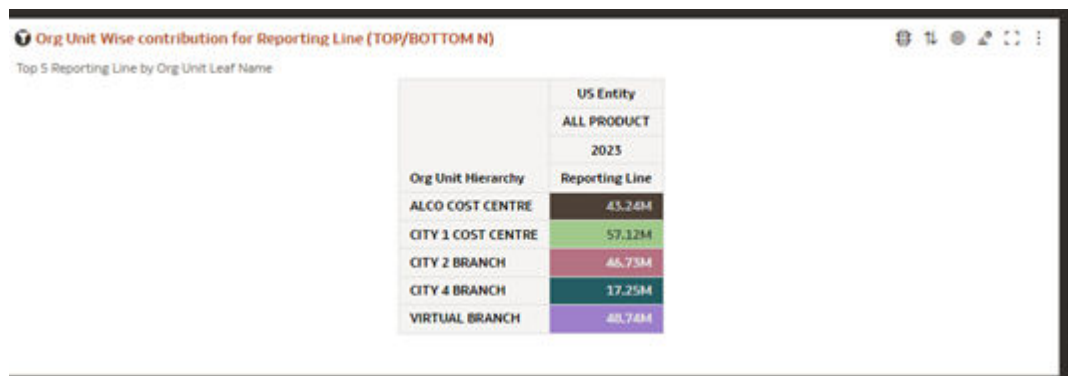Figure 10-73 Org Unit wise contribution for Reporting Line (TOP/BOTTOM N)


- **Org Unit by End of Period Balance (TOP/ BOTTOM N):** the same is available for bottom view The chart displays the Top N (N selected from the chart prompt) and bottom N organization units sorted in a descending order by End of Period Balances.

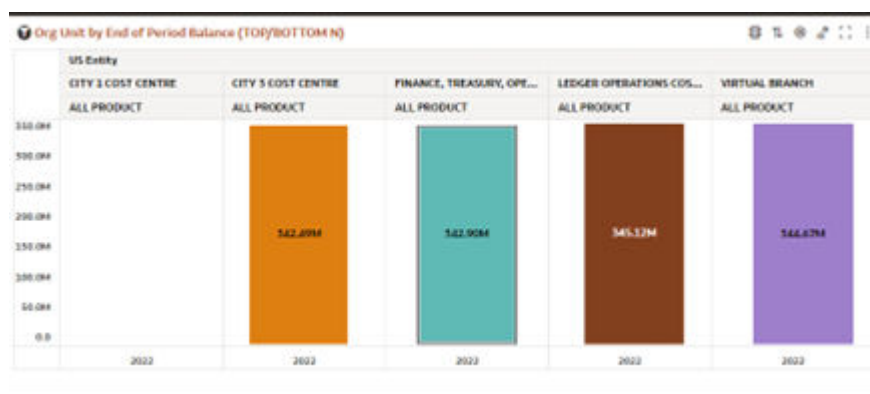Figure 10-74 Org Unit by End of Period Balance (TOP/BOTTOM N)


- **Org Unit by End of Period Balance (TOP N);** the same is available for bottom view The chart displays the Top N (N selected from the chart prompt) and bottom N organization units sorted in a descending order by End of Period Balances.

Figure 10-75 Org Unit by End of Period Balance (TOP N)**Org Unit by End of Period Balance (TOP N)**

Top 5 End of Period Balance by Org Unit Leaf Name

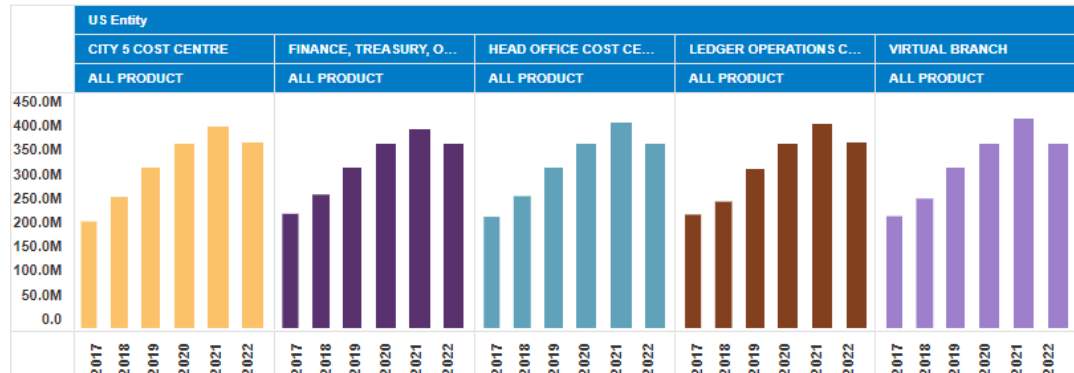


- **Key Business Metrics by Org Unit (TOP/ BOTTOM N):** the same is available for bottom view The chart displays the Top N (N selected from the chart prompt) and bottom N organization units sorted in a descending order by End of Period Balances and provides the breakup between Asset and Liability Balances.

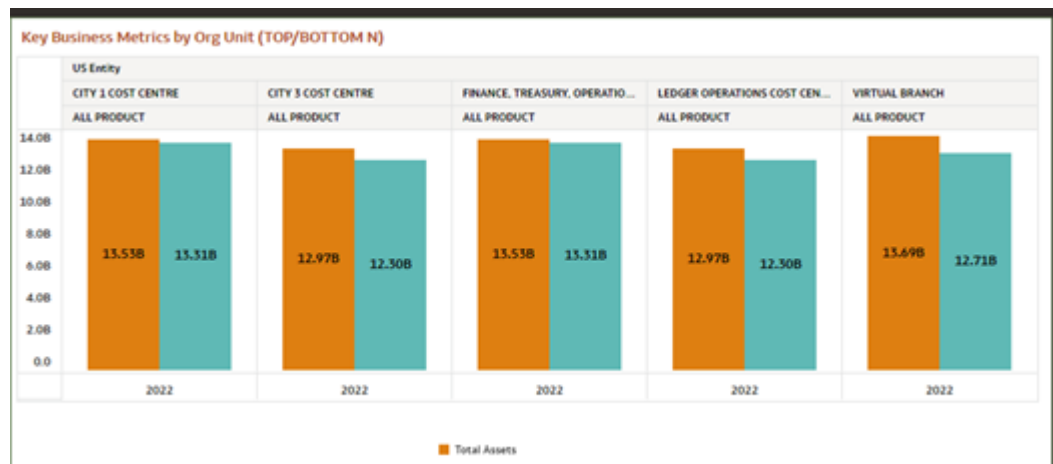Figure 10-76 Key Business Metrics by Org Unit (TOP/BOTTOM N)

- **Key Performance Metrics by Org Unit (TOP/ BOTTOM N):** the same is available for bottom view The chart displays the Top N (N selected from the chart prompt) and bottom N organization units sorted in a descending order by End of Period Balances and provides selected KPI's like NIM and ROTA of these Org Units.

Figure 10-77 Key Performance Metrics by Org Unit (TOP/ BOTTOM N)

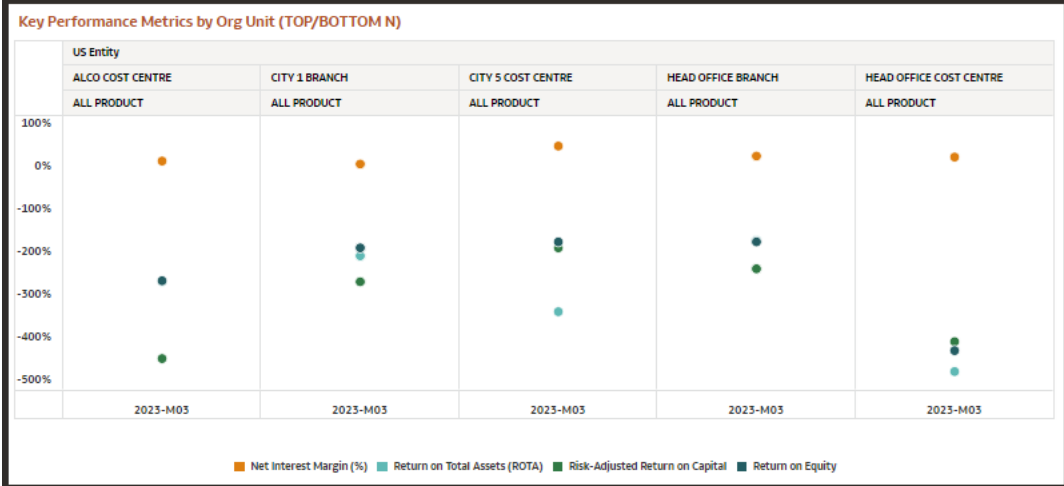

Profitability Insights

To access the Processing Analytics report, select **Analytics** from the LHS Menu, and then select **Profitability Insights**.

Profitability Insights provides strategic e a comprehensive view of financial performance around the Institutional and Retail customer of the bank across multiple dimensions, including Organization Unit, Product, Line of Business, Region, Channel, and Customer Performance, all aggregated up from the Instrument level.

Note

Before generating reports and analytics, it is mandatory to set the relevant currencies and currency rates. This is required for generating the reports with correct values. For more information about creating currencies and currency rates, see the following:

- [Currencies](#)
- [Currency Rates](#)

To feed the Profitability Insights Report, refer to the *Oracle Financial Services Profitability Analytics Cloud Service Data Flow* document available at [Doc ID: 2869409.1](#).

For the Profitability Insights Report refer to the following Data Flow sub-sections:

- PACS - Instrument Summary
- PACS - Instrument Income Statement


For Income Statement and Balance Sheet Hierarchies, or any other Hierarchy created out of Financial Element dimension, a Financial Element carrying a percentage value cannot be added as a child, Sibling to a child or Leaf under Parent/ Child/ Sibling in the Hierarchy. Users are expected to be mindful not to map a portfolio column to a FE denoting a rate or apply an expression, where a divisor is used in a way that the column value effectively becomes a rate, thus preventing a meaningful roll-up to the node of the hierarchy.

Instrument Level Aggregation and Insights

The Profitability Insights report is arranged as a set of reports, classified into the following:


- Org Unit
- Product
- Region
- Time
- Detailed IS
- Channel
- Other Insights

Figure 10-78 Profitability Insights

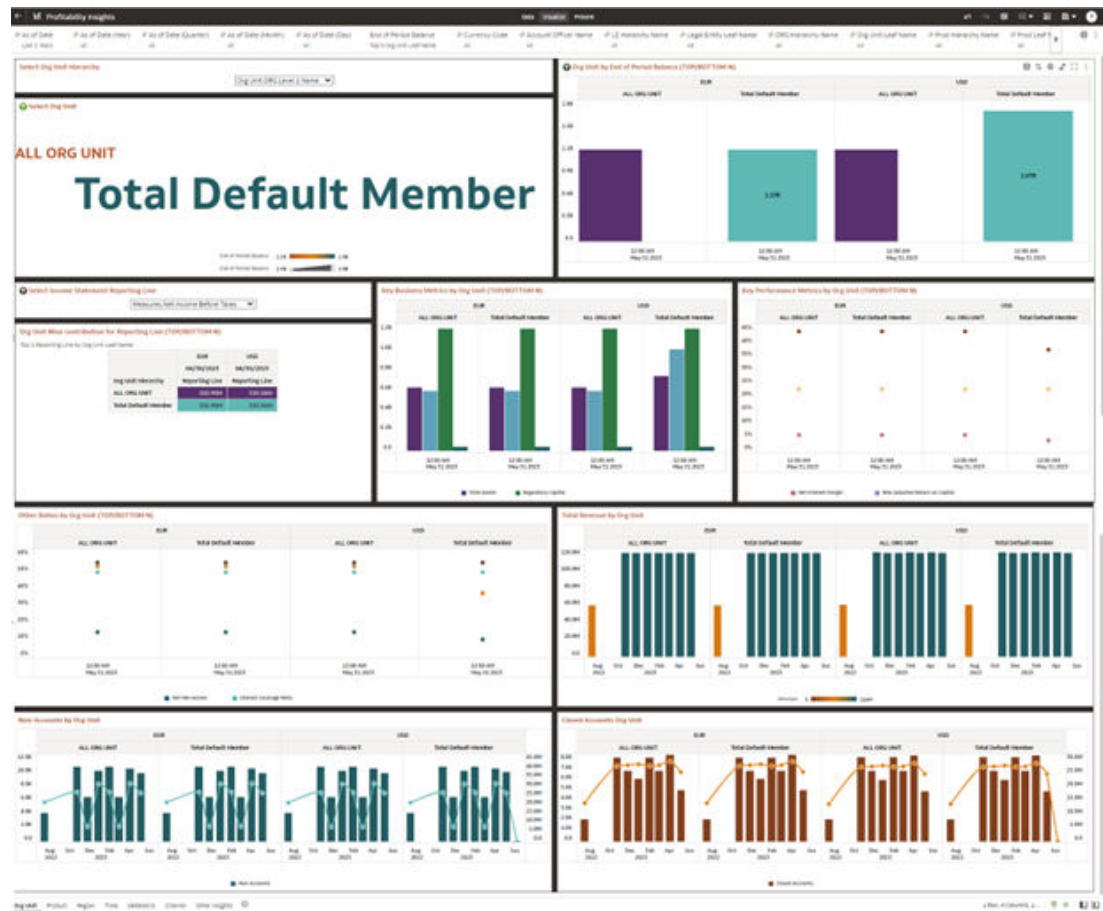


Report Common Filters

You can use a series of canvas level pinned Prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-79 Canvas Prompt Filters for Time Dimension

- **As of Date:** You can use this filter to isolate a selected timeframe for the analysis. The following screenshot displays the possible options that this filter provides against the Time Dimension.

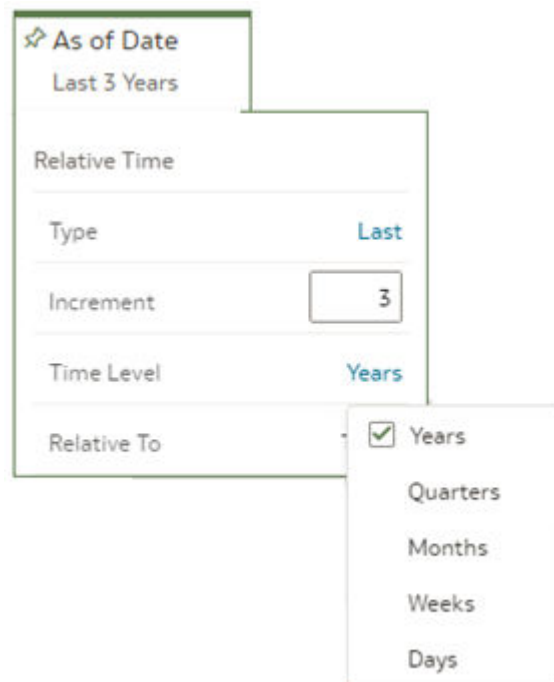Figure 10-80 As of Date Selection

- Additional Filters for the Time Dimension as follows:
 - **As of Date**
 - **As of Date (Year)**
 - **As of Date (Quarter)**
 - **As of Date (Month)**
 - **As of Date (Day)**

Figure 10-81 Key Processing Dimensions Prompt Filters

- **Legal Entity Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Legal Entity Key Processing Dimension. As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same

time, a mandatory driver to select “LE Hierarchy Name” must be selected with only a single value simultaneously.

- **Legal Entity Leaf Name:** You can use this filter to select the Legal Entity Leaf Name that is related to the underlying Management Ledger data.
- **Org Unit Hierarchy Name:** This filter is for the group filtering on Organization Unit key processing dimension. As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, you must select the “Org Unit Hierarchy Name” with only a single value simultaneously.
- **Org Unit Leaf Name:** You can use this filter to select the Org Unit Leaf Name corresponding to the hierarchy.
- **Product Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Product Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “Prod Hierarchy Name” must be selected with only a single value simultaneously.
- **Product Leaf Name:** You can use this filter to select the Prod Leaf Name that is related to the underlying Management Ledger data.
- **Geography Hierarchy Name:** This is a mandatory filter for the group filtering on the Geography Hierarchy.
As the application supports the creation of multiple hierarchies for the same dimension of analysis, to avoid displaying results from multiple hierarchies at the same time, a mandatory driver to select “Geography Hierarchy Name” must be selected.
- **Geography Leaf Name:** You can use this filter to select the Geography Leaf Name corresponding to the hierarchy.

Figure 10-82 Simple Dimensions Prompt Filters



- **Currency Code:** You can use this filter to select a specific Currency Code to be applied to the underlying management ledger data.
- **Account Officer Name:** You can use this filter to select the Account Officer or Account Manager for the underlying instrument tables accounts.
- **Customer Type Name:** You can use this filter to select the Customer Type for the underlying instrument tables accounts.

Figure 10-83 Standard Dimensions Prompt Filters



- **Geography Leaf Name:** You can use this filter to select a specific Geography value at leaf level related to the underlying instrument tables accounts.

- **Branch Leaf Name:** You can use this filter to select a specific Branch value at leaf level related to the underlying instrument tables accounts.
- **Industry Leaf Name:** You can use this filter to select a specific Industry value at leaf level related to the underlying instrument tables accounts.
- **Channel Name:**

In canvas Variable Prompts

Figure 10-84 In-canvas Prompt Filters for Org Unit

Figure 10-85 In-canvas Prompt Filters for Product

Figure 10-86 In-canvas Prompt Filters for Region

Figure 10-87 In-canvas Prompt Filters for Other Insights

- **Select Org Unit Hierarchy:** You can use this filter to select the Org Unit Level Name pertaining to the Org Unit Hierarchy level, for rolling up the results on the underlying Org Unit Leaves that are part of the selected hierarchy.
- **Select Product Hierarchy:** You can use this filter to select the Product Level Name pertaining to the Product Hierarchy level, for rolling up the results on the underlying Product Leaves that are part of the selected hierarchy.
- **Select Region Hierarchy:** You can use this filter to select the Region Level Name pertaining to the Region Hierarchy level, for rolling up the results on the underlying Region Leaves that are part of the selected hierarchy.
- **Select Income Statement Reporting Line:** This is a mandatory filter for the group filtering on the Income Statement reporting line dimension. The following filter values are available for selection:
 - **Net Income Before Tax:** Net income before tax is the amount of profit made by the financial institution before income tax is paid. This figure is found by subtracting total expenses from total revenue.
 - **Net Interest Income:** Net Interest Income (NII) is the difference between the revenue generated from a bank's interest-bearing assets and expenses incurred while paying its interest-bearing liabilities. A bank's assets consist of personal and commercial loans, mortgages, securities etc. A bank's liabilities typically consist of customer deposits.

- **Non Interest Income:** The non-interest income is the revenue generated by the banks and financial institutions, usually from the non-core activities (loan processing fee, late payment fees, credit card charges, service charges, penalties, and so on, net off waivers).
- **Operating Expenses:** Operating Expenses are expenses incurred by the bank or financial institution to carry out normal business operations.
- **Provision for Credit Losses:** The provision for credit losses is an estimation of potential losses that a bank might experience due to credit risk. The provision for credit losses is treated as a non-operating expense on the company's financial statements.

Report Data Action

The reports provide the capability to analyze data across canvases via a Data Action. The following are the Data Action Configuration details:

Figure 10-88 Data Action Configuration in Org Unit canvas

From every chart available in Org Unit you can select a value, and then navigate to the Product, Region and Other Insights canvases.


To do so, with a right click on the chart selection, the data action option (Analyze) will appear for you to be able to pass on the data filters to the canvas that you select.

Figure 10-89 Data Action Configuration in Product canvas

From every chart available in Product you can select a value, and then navigate to the Org Unit, Region and Other Insights canvas.

To do so, with a right click on the chart selection, the data action option (Analyze) will appear for you to be able to pass on the data filters to the canvas that you select.


Figure 10-90 Data Action Configuration in Region canvas

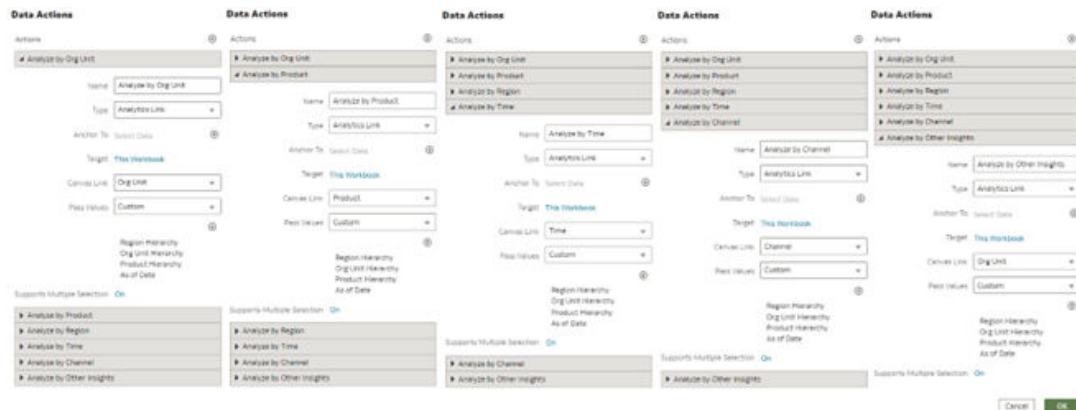

From every chart available in Region, you can select a value, and then navigate to the Org Unit, Product and Other Insights canvas.

In order to do so, with a right click on the chart selection, the data action option (Analyze) will appear for you to be able to pass on the data filters to the canvas that you select.

Figure 10-91 Data Action Configuration in Time canvas

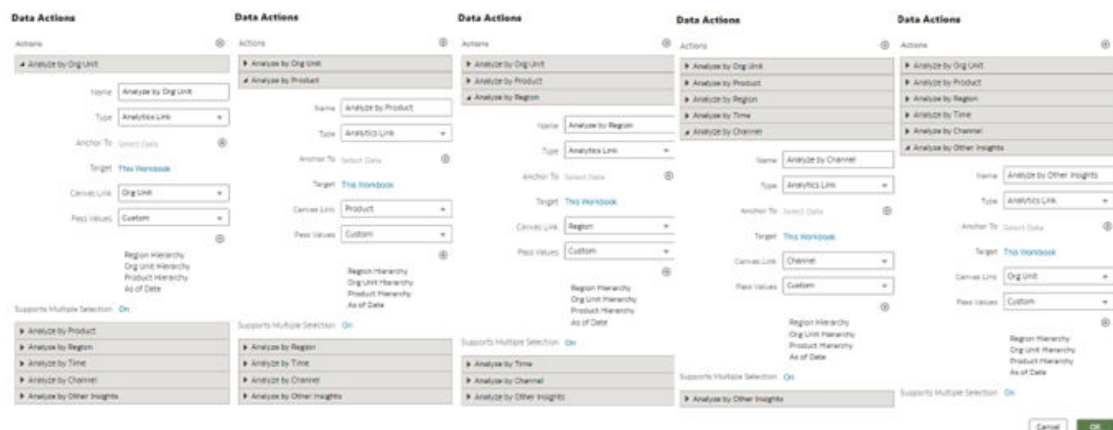

From every chart available in Other Insights, you can select a value, and then navigate to the Org Unit, Product and Region canvas.

In order to do so, with a right click on the chart selection, the data action option (Analyze) will appear for you to be able to pass on the data filters to the canvas that you select.

Figure 10-92 Data Action Configuration in Channel canvas

From every chart available in Region, you can select a value, and then navigate to the Org Unit, Product, Region, Time and Other Insights canvas.

In order to do so, with a right-click on the chart selection, the data action option (Analyze) will appear for you to be able to pass on the data filters to the canvas that you select.

Figure 10-93 Data Action Configuration in Other Insights canvas

From every chart available in Other Insights, you can select a value, and then navigate to the Org Unit, Product and Region canvas.


In order to do so, with a right click on the chart selection, the data action option (Analyze) will appear for you to be able to pass on the data filters to the canvas that you select.

Org Unit

Understanding Org Unit performance is of strategic importance to financial services institutions. The “Org Unit” report here is similar to the one we have in the Management Ledger Reporting section except for the fact that the reports are populated on the back off Instrument Summary data with additional reporting.

You can use a series of Report Prompts, as previously described, to filter the data. In addition, there are In-Report prompt selections to select the Top/ Bottom N org units that you are interested in, and the corresponding data will be displayed.

Figure 10-94 Select Income Statement Reporting Line




Select Income Statement Reporting Line

Measures.Net Income Before Taxes

The report displays the underlying data according to the following Charts:

- **Org Unit Wise contribution for Reporting Line (TOP N); the same is available for bottom view**
In this chart, for the selected reporting line, the Top N (N selected from the chart prompt) and bottom N organization units are displayed in descending order of value of the reporting line.

Figure 10-95 Org Unit Wise contribution for Reporting Line (TOP N)

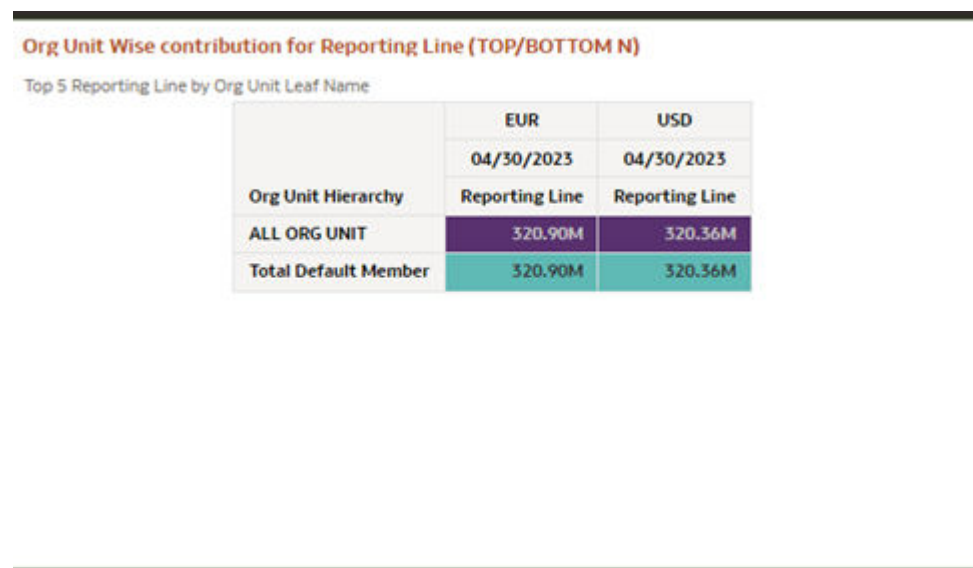

Org Unit Wise contribution for Reporting Line (TOP/BOTTOM N)

Top 5 Reporting Line by Org Unit Leaf Name

Org Unit Hierarchy	EUR	USD
	04/30/2023	04/30/2023
	Reporting Line	Reporting Line
ALL ORG UNIT	320.90M	320.36M
Total Default Member	320.90M	320.36M


- **Org Unit by End of Period Balance (TOP N); the same is available for bottom view:**
The chart displays the Top N (N selected from the chart prompt) and bottom N organization units sorted in a descending order by End of Period Balances.

Figure 10-96 Org Unit by End of Period Balance (TOP N)



- **Key Business Metrics by Org Unit (TOP N); the same is available for bottom view:** The chart displays the Top N (N selected from the chart prompt) and bottom N organization units sorted in a descending order by End of Period Balances and provides the breakup between Asset and Liability Balances along with Regulatory and Economic Capital.

Figure 10-97 Key Business Metrics by Org Unit (TOP/ BOTTOM N)

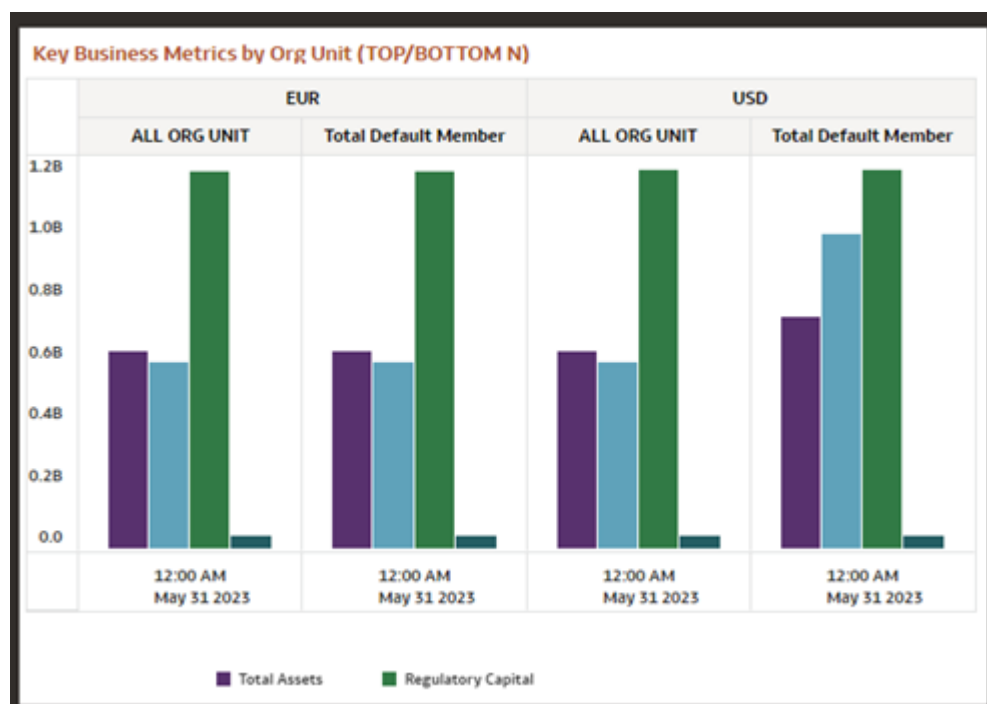


- **Total Assets and Total Liabilities:** Total Asset and Total Liability Balances.
- **Regulatory Capital:** Regulatory Capital is by definition similar to that of Economic capital except for the fact that unlike economic capital, regulatory capital is calculated as per regulations laid down by banking regulators in a country.
- **Economic Capital:** Economic Capital is the amount of risk capital, which a firm requires to cover the risks that it is running on books and collecting as a risk taking

enterprise. These risks are typically market risk, credit risk, legal risk, and operational risk. It is the amount of capital that is needed by the bank to stay solvent.


- **Key Performance Metrics by Org Unit (TOP N); the same is available for bottom view:** The chart displays the Top N (N selected from the chart prompt) and bottom N organization units sorted in a descending order by End of Period Balances and provides selected KPI's like NIM, RAROC, ROE and ROTA of these Org Units.

Figure 10-98 Key Performance Metrics by Org Unit (TOP/ BOTTOM N)

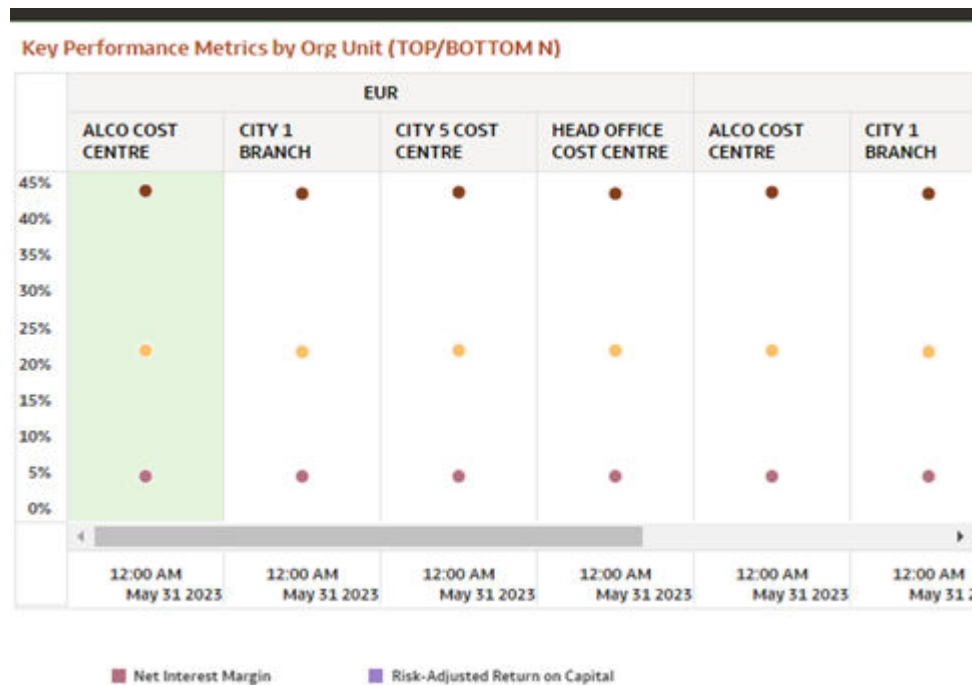

- **Net Interest Margin:** NIM is usually Net Interest Income expressed as a percentage that is, it is the net interest income a bank or financial institution earns in percentage terms on the average interest-earning assets in a specified period.
- **Return on Total Assets:** Return on Total Assets (ROTA) is a ratio that measures a company's earnings before taxes (NIBT) relative to its total Assets. It is expressed as a percentage.
- **Risk Adjusted Return on Capital:** Risk Adjusted Return on Capital is a ration that measures the financial health of the financial institution. Here NIBT is divided by Unexpected Losses and expressed as a percentage.
- **Return on Equity:** Return on equity (ROE) is the measure of a bank's net income divided by its shareholders' equity. ROE is a gauge of a corporation's profitability and how efficiently it generates those profits. The higher the ROE, the better a company is at converting its equity financing into profits.
- **Other Ratios by Org Unit (TOP N); the same is available for bottom view:** The chart displays the Top N (N selected from the chart prompt) and bottom N organization units sorted in a descending order by End of Period Balances and provides selected business metrics like Net Fee Income, Gross Interest Income, Interest Coverage Ratio and Debt coverage ratio, all expressed as percentages.

Figure 10-99 Other Ratios by Org Unit (TOP/ BOTTOM N)

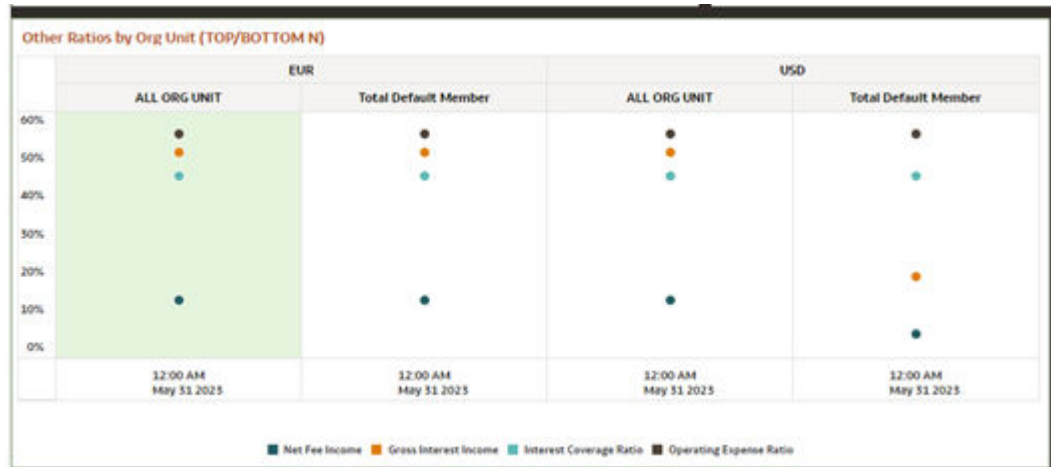

- **Net Fee Income:** Net Fee Income is the revenue generated by the bank from fees and commissions less the waivers expressed as a percentage of Total End of Period Balances.
- **Gross Interest Income:** Gross Interest Income is the total interest paid by the borrower to the bank relative to its total outstanding balances. It does not account for any interest expenses incurred by the bank or any kind of fees or charges. It is expressed as a percentage.
- **Interest Coverage Ratio:** The Interest Coverage Ratio measures a bank's ability to meet required interest expense payments related to its outstanding obligations. It is expressed as a ratio of NIBT with Total Interest Expenses expressed as a percentage.
- **Operating Expense Ratio:** Operating Expense ratio compares operating expenses to Total Revenue. It is a common metric financial institutions use to determine how efficient their management is at keeping operating costs low while also earning revenue.

Product

This report provides monthly trended results using that you can monitor product line performance, track earnings trend and other key factors at the product levels.

You can use a series of Report Prompts, as previously described, to filter the data. In addition, there are In-Report prompt selections to select the Top/ Bottom N products that you are interested in, and the corresponding data will be displayed.

The report displays the underlying data according to the following Charts:

- **Product wise contribution for Reporting Line (TOP N); the same is available for bottom view:** In this chart, for the selected reporting line, the Top N (N selected from the chart prompt) and bottom N products are displayed in descending order of value of the reporting line.


Figure 10-100 Product wise contribution for Reporting Line (TOP/ BOTTOM N)

Product Wise contribution for Reporting Line (TOP/BOTTOM N)

Top 5 Reporting Line by Prod Leaf Name


Product Hierarchy	EUR	USD
	04/30/2023	05/31/2023
	Reporting Line	Reporting Line
Current Account	32.30M	32.44M
Fixed Rate Mortgage	32.26M	32.04M
Offset Mortgage	32.22M	32.33M
Student Loan	16.54M	16.66M
Vostro Account Class	32.31M	32.21M

- **Product by End of Period Balance (TOP N);** the same is available for bottom view: The chart displays the Top N (N selected from the chart prompt) and bottom N products sorted in a descending order by End of Period Balances.

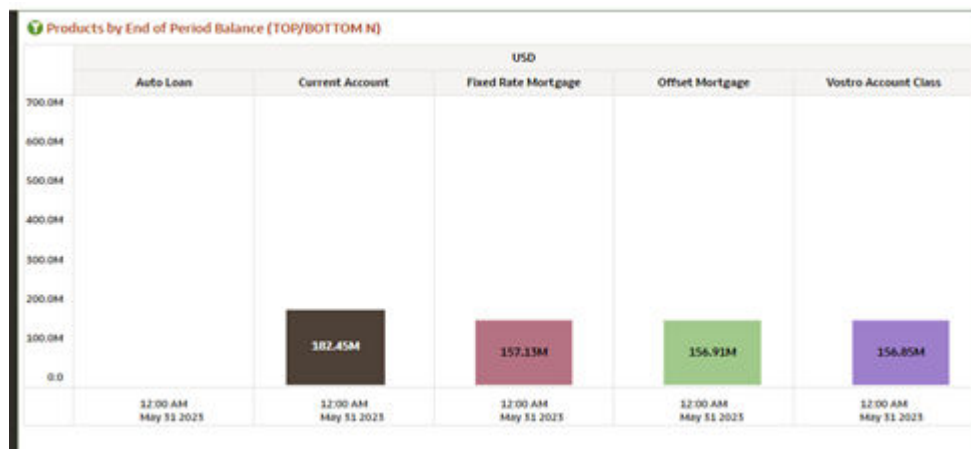Figure 10-101 Product by End of Period Balance (TOP/ BOTTOM N)


- **Key Business Metrics by Products (TOP N);** the same is available for bottom view: The chart displays the Top N (N selected from the chart prompt) and bottom N organization units sorted in a descending order by End of Period Balances and provides the breakup between Asset and Liability Balances along with Regulatory and Economic Capital.

Figure 10-102 Key Business Metrics by Products (TOP/ BOTTOM N)

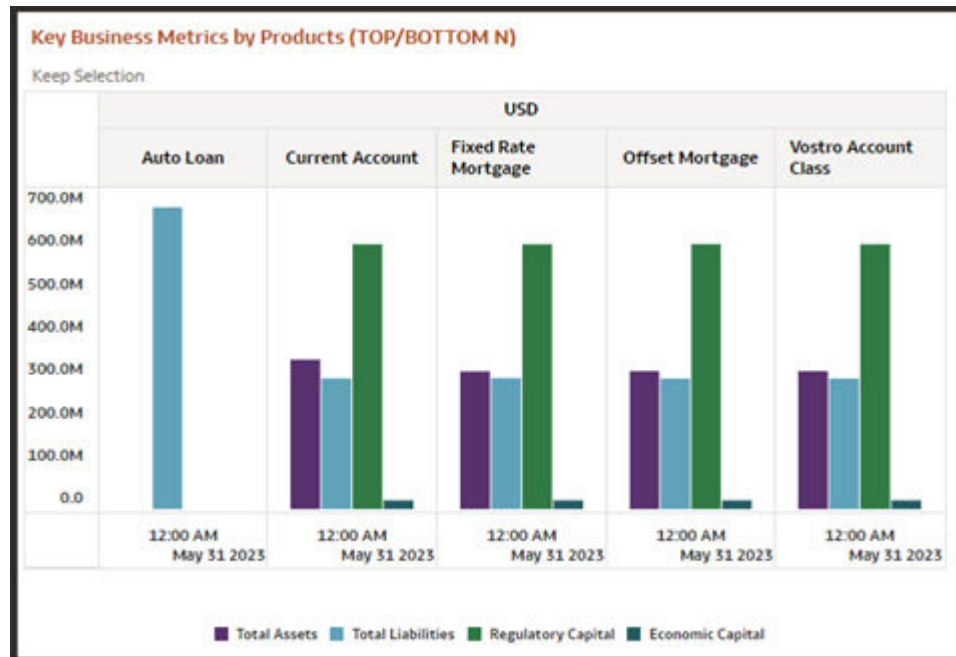

- **Key Performance Metrics by Products (TOP N); the same is available for bottom view:** The chart displays the Top N (N selected from the chart prompt) and bottom N products sorted in a descending order by End of Period Balances and provides selected KPI's like NIM, RAROC, ROE and ROTA of these Products.

Figure 10-103 Key Performance Metrics by Products (TOP/ BOTTOM N)

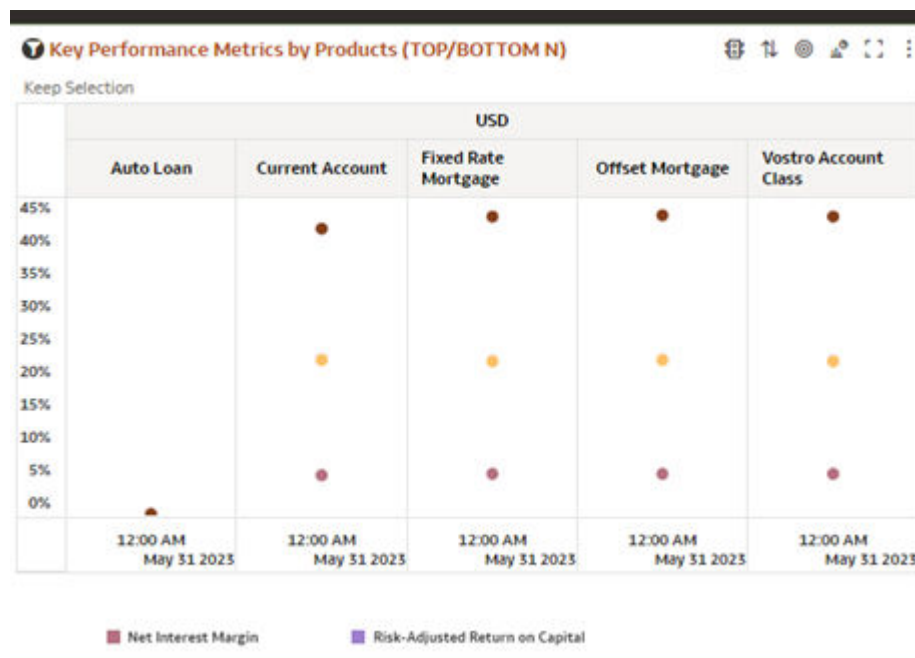

- **Other Ratios by Products (TOP N); the same is available for bottom view:** The chart displays the Top N (N selected from the chart prompt) and bottom N products sorted in a descending order by End of Period Balances and provides selected business metrics like


Net Fee Income, Gross Interest Income, Interest Coverage Ratio and Debt coverage ratio, all expressed as percentages.

Figure 10-104 Other Ratios by Products (TOP/ BOTTOM N)




- **Total Revenue by product:** This chart displays the revenues generated by the products.

Figure 10-105 Total Revenue by product

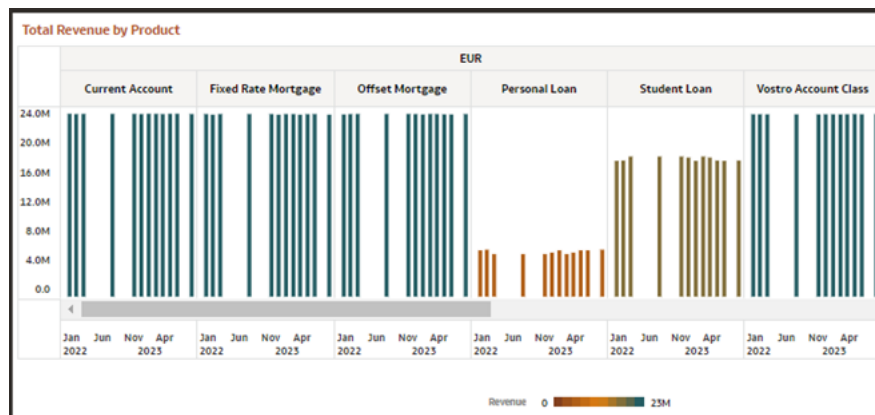


- **New Accounts by product:** This chart displays a time series view of the new accounts opened with the products displayed in trellis columns and the income generated from new accounts as lines.

Figure 10-106 New Accounts by product

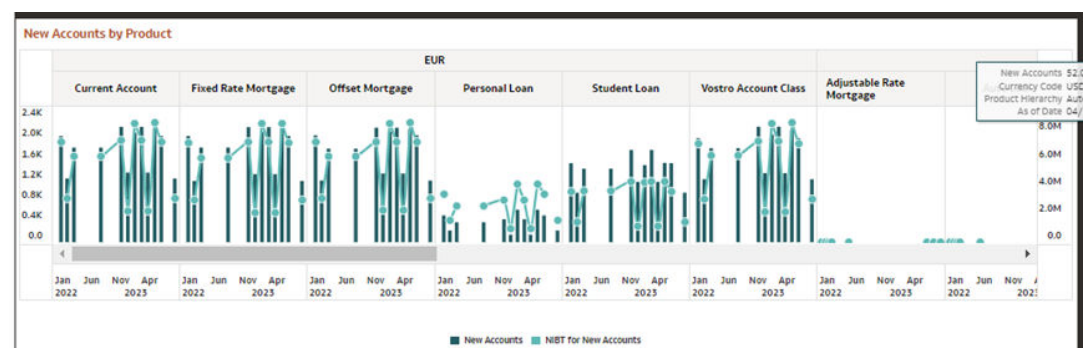

- **Closed Accounts by product:** This chart displays a time series view of the closed accounts opened with the products displayed in trellis columns and the income generated from the closed accounts as lines.

Figure 10-107 Closed Accounts by product

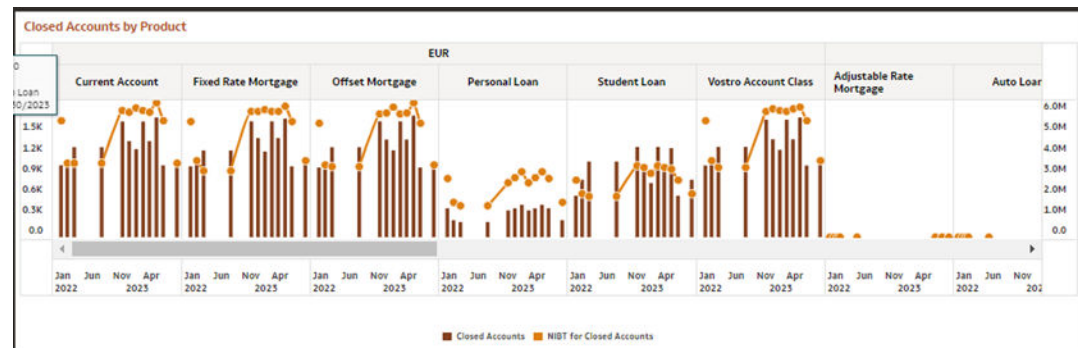


Region

This report enables tracking of Balances, reporting lines, business and performance metrics including comparison with selected regions and regional hierarchy at different levels.

You can use the following report filters to further slice and dice the available report charts:

Figure 10-108 Canvas Prompt Filters

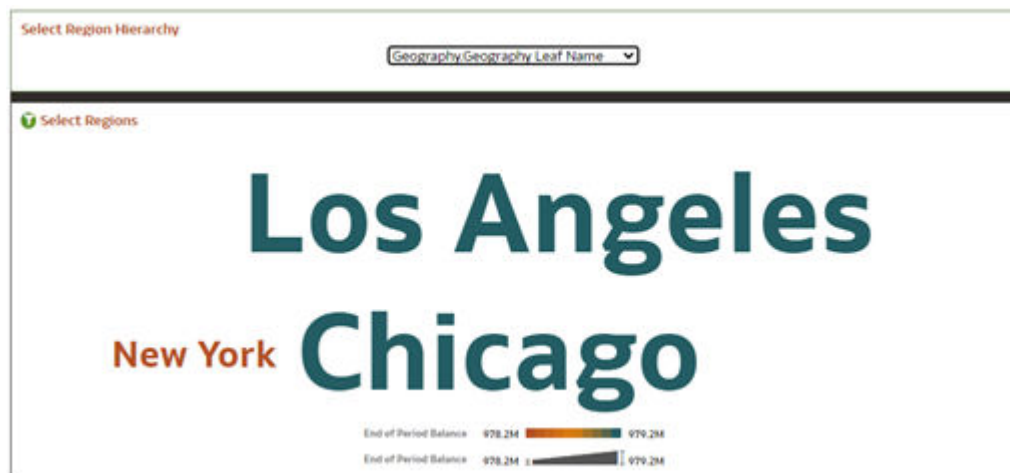

In addition, you can use a series of Report Prompts, as previously described, to filter the data. The report displays the underlying data according to the following Charts:

- **Regions by End of Period Balance:** The chart displays the End of Period Balances for the region hierarchy or leaf level as selected by the user.

Figure 10-109 Regions by End of Period Balance

Regions by End of Period Balance

	USD							
	07/31/2022	10/31/2022	11/30/2022	12/31/2022	01/31/2023	02/28/2023	03/31/2023	04/30/2023
Chicago	62.82M	130.09M	131.13M	130.79M	130.89M	131.13M	130.77M	130.79M
Los Angeles	62.93M	130.90M	130.98M	130.47M	130.90M	130.98M	130.83M	130.87M
New York	62.75M	130.75M	130.86M	130.79M	130.75M	130.86M	130.65M	130.79M
	0.00 80.00M	0.00 80.00M	0.00 80.00M	0.00 80.00M	0.00 80.00M	0.00 80.00M	0.00 80.00M	0.00 80.00M

- Region Wise Contribution for Reporting Line:** The chart displays the value of the reporting line for the selected combination of reporting line, leveraging the Select Income Statement Reporting Line variable prompt, and region hierarchy, as described earlier in how to leverage Select Region hierarchy.

Figure 10-110 Region Wise Contribution for Reporting Line

Select Income Statement Reporting Line


Measures.Net Income Before Taxes

Region Wise contribution for Reporting Line

Region Hierarchy	USD				
	07/31/2022	10/31/2022	11/30/2022	12/31/2022	01/31/2023
	Reporting Line	Reporting Line	Reporting Line	Reporting Line	Reporting Line
Chicago	25.53M	26.98M	26.77M	26.68M	26.98M
Los Angeles	25.67M	26.95M	26.75M	26.89M	26.95M
New York	25.45M	26.93M	26.77M	26.88M	26.93M


- Key Business Metrics by Region:** The chart displays the key Business Metrics – Total Assets, Total Liabilities, Economic Capital, and Regulatory Capital for the selected Region hierarchy.

Figure 10-111 Key Business Metrics by Region

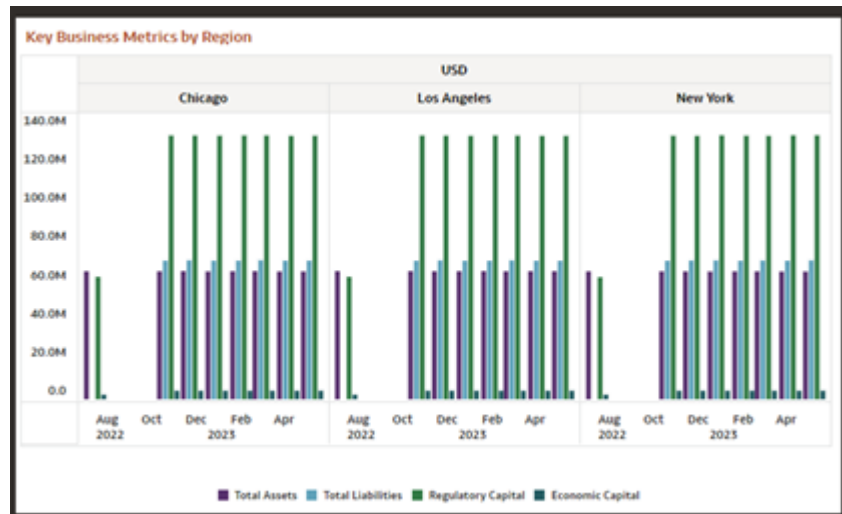


- **Key Performance Metrics by Region:** The chart displays the key Business Metrics – Net Interest Margin, Return on Total Assets, Risk Adjusted Return on Capital, and Return on Equity for the selected Region hierarchy.

Figure 10-112 Key Performance Metrics by Region

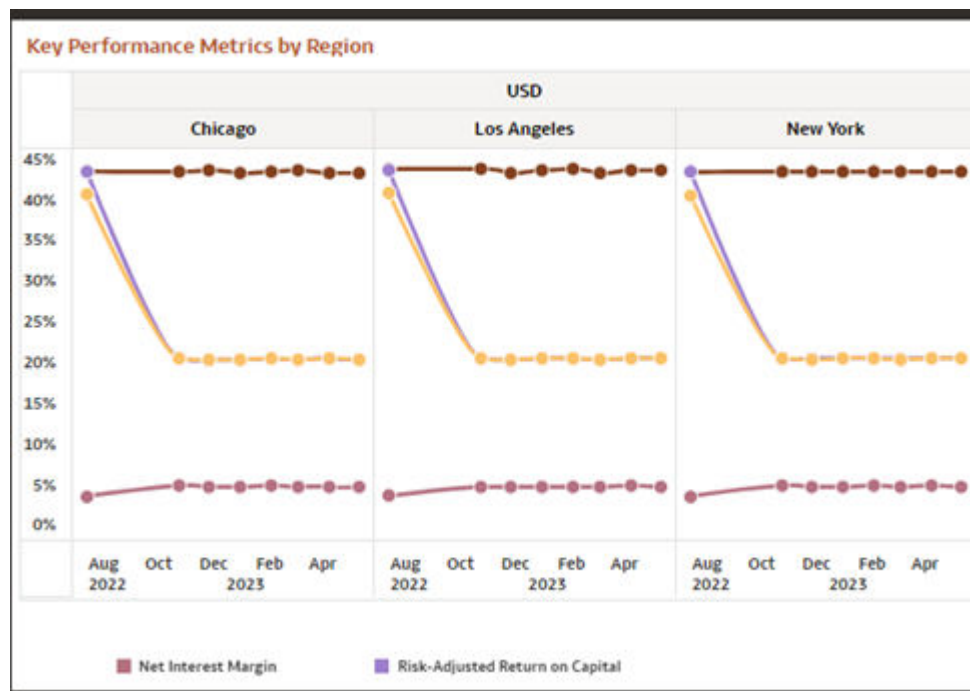

- **Other Ratios by Region:** The chart displays business metrics like Net Fee Income, Gross Interest Income, Interest Coverage Ratio and Debt coverage ratio, all expressed as percentages for the selected region hierarchy.

Figure 10-113 Other Ratios by Region

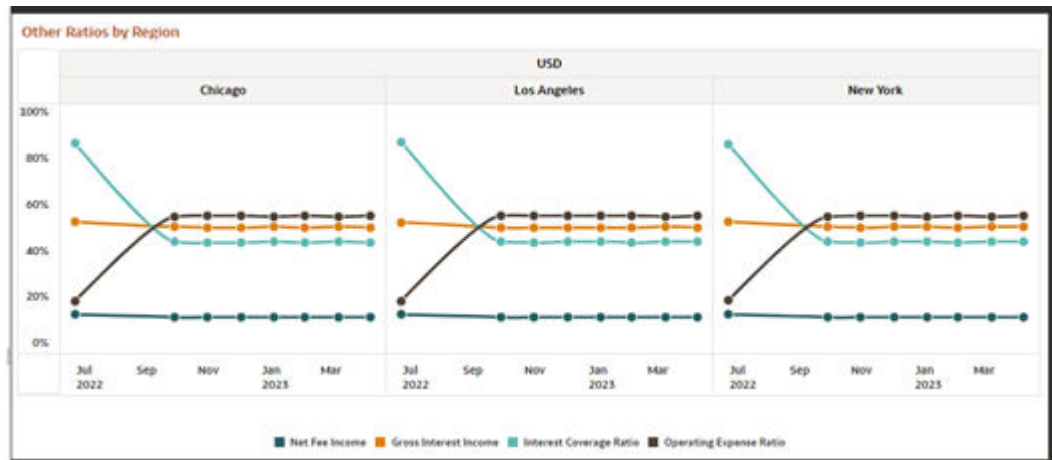


- **Total Revenue by Region:** The chart displays Total Revenue for the selected region hierarchy.

Figure 10-114 Total Revenue by Region




- **New Accounts and Closed Accounts by Region:** The chart displays business metrics NIBT, number of New Accounts and Closed Accounts over time.

Figure 10-115 New Accounts by Region

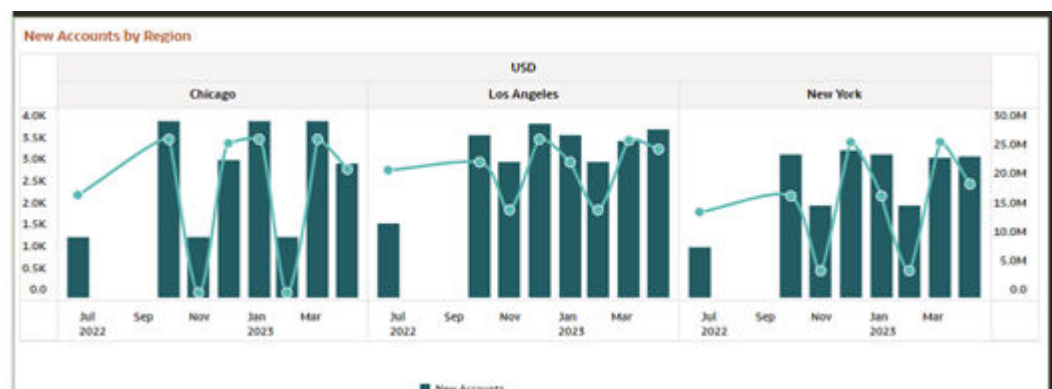

- Closed Accounts byRegion

Figure 10-116 Closed Accounts byRegion

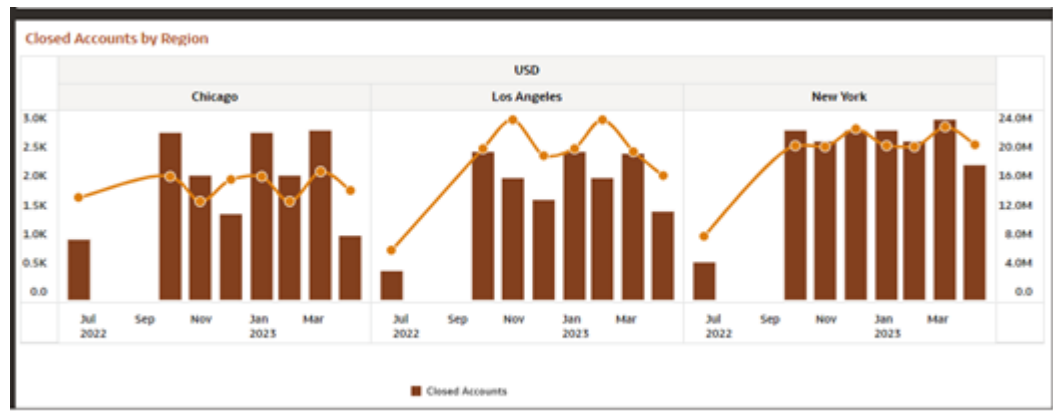

Time

This report provides a view-by-line Time tracking of reporting lines, business, and performance metrics including comparison with time dimension levels.

You can use the following report filters to further slice and dice the available report charts:

Figure 10-117 Canvas Prompt Filters – Time Dimension

As of Date (Year) Planning	As of Date (Quarter) Planning	As of Date (Month) Planning	As of Date (Day) Planning
All	All	All	All

Figure 10-118 Variable Prompt Filters

Select Income Statement Reporting Line Measures Net Income Before Taxes ...	Select Region Hierarchy Geography (Geography Leaf Name ...)	Select Org Unit Hierarchy Org Unit (Org Unit Leaf Name ...)	Select Product Hierarchy Product (Product Leaf Name ...)

- **Select Income Statement Reporting Line:** This is a mandatory filter for the group filtering on the Income Statement reporting line dimension. The following filter values are available for selection:
 - **Net Income Before Tax:** Net income before tax is the amount of profit made by the financial institution before income tax is paid. This figure is found by subtracting total expenses from total revenue.
 - **Net Interest Income:** Reflects the difference between the revenue generated from a bank's interest-bearing assets and the expenses associated with paying its interest-bearing liabilities.
 - **Non Interest Income:** Income derived primarily from fees including deposit and transaction fees, insufficient funds (NSF) fees, annual fees, monthly account service charges, inactivity fees, check and deposit slip fees, and so on.
 - **Operating Expenses:** Expenses that a business incurs through its normal business operations.

- **Provisions for Credit Loss:** Estimation of potential losses that a company might experience due to credit risk. The provision for credit losses is treated as an expense on the company's financial statements.

The view is segmented into three different perspectives. Actual, Budget Estimates, Operating Plan to enable comparison in these by dimensions Currency Code, Region, Organization Unit, and Product Hierarchy.

Figure 10-119 Selected Reporting Line



Figure 10-120 Key Business Metrics



Figure 10-121 Key Performance Metrics



Figure 10-122 Other Ratios -Actual



Detailed Income Statement

The Detailed IS Report as it implies details the granular level reporting lines of the P&L of a bank. Time-series reporting of the income statement, with respect to the last five time periods selected and are provided at the granularity of As of Date.

Figure 10-123 Detailed IS Report Default

Income Statement

Line Item Hierarchy Name: Income Statement Hierarchy Line Item Level: 0, 1, 2, 5

		Legal Entity Hierarchy		US Entity		
		Org Unit Hierarchy		ALL ORG UNIT		
		Product Hierarchy		ALL PRODUCT		
		Time		2023-M01	2023-M02	2023-M03
Line Item ID ▲	Line Item Name					
0	Income Statement					
1	Total Revenue					
1.1	Net Interest Income					
1.1.1	Total Interest Income					
1.1.2	Primary FTP Charges					
1.1.3	Other FTP Charges					
1.1.4	Primary FTP Credits					
1.2	Non-Interest Income					
2	Total Operating and Non-Operating Expenses					
2.1	Operating Expenses					
2.2	Non-Operating Expenses					
3	Income Before Taxes					
4	Risk Adjustments					
4.1	Charges					
4.2	Credits					
5	Net Income Before Taxes					
6	Taxes					
7	Net Income After Taxes					

Income Statement Line Items Variance and Line Item Variance %: The Income Statement line item variance and variance % reports work in the same way as in the case of the Detailed Income Statement canvas in Management Reporting.

Channel Canvas

This report enables tracking by Organization Channel performance metrics including comparison with selected regions, organizations, and product hierarchies at different levels.

You can use the following report filters to further slice and dice the available report charts:

- **New business by Origination Channel** report shows the new balances that have been added to the books across the various origination channels during the selected time period.

Figure 10-124 New Business by Origination Channel Report



- **New accounts by Origination Channel** report shows the new accounts that have been added to the books across the various origination channels during the selected time period.

Figure 10-125 New Accounts by Origination Channel Report



- **Closed accounts by Origination Channel** report shows the accounts that have been closed with a view of the origination channels of those accounts during the selected time period.

Figure 10-126 Closed Accounts by Origination Channel



Other Insights

The Other Insights report provides granular information on account and customer distribution. This data help banks manage their investments efficiently and invest in areas that are of strategic and financial importance to the bank. You can use a series of Report Prompts, as previously described, to filter the data.

The report displays the underlying data according to the following Charts:


- **Number of Accounts and Customers Distribution:** The chart displays business metrics like Number of Accounts and Number of Customers for the selected Region, Org Unit and Product hierarchy.

Figure 10-127 Number of Accounts and Customers Distribution




- **Number of Accounts dissemination by Geography, Org Unit, and Product:** As the name implies, this chart provides a breakup of the number of accounts by Region, Org Unit and Product.

Figure 10-128 Number of Accounts dissemination by Geography, Org Unit and Product

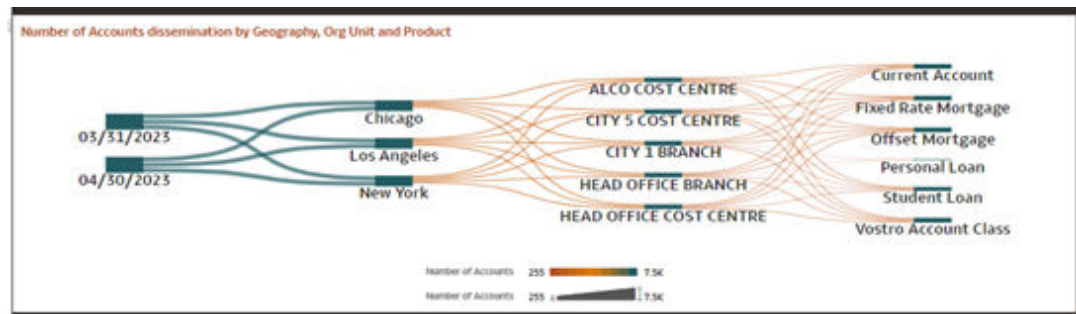


- **Number of Customers dissemination by Geography, Org Unit, and Product:** As the name implies, this chart provides a breakup of the number of customers by Region, Org Unit and Product.

Figure 10-129 Number of Customers dissemination by Geography, Org Unit and Product

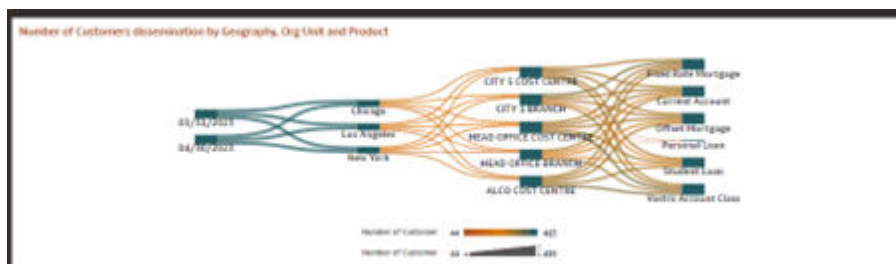


- **Relationship Depth by Geography:** Relationship depth indicates the number of accounts per customer. In this report, this is reported as per Geography.

Figure 10-130 Relationship Depth by Geography

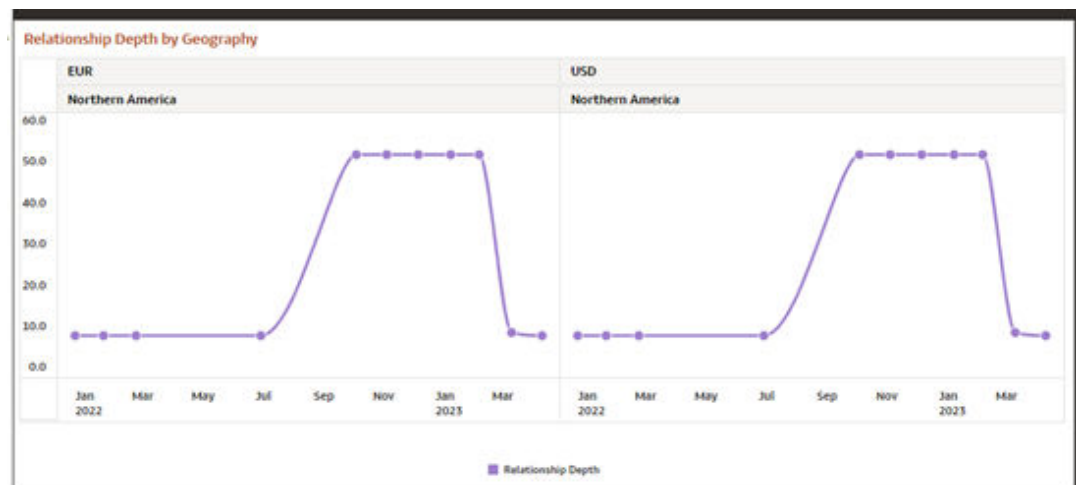


- **Number of Accounts by Credit Rating Report:** This report shows the credit rating distribution for the accounts in the portfolio, thus giving an indication of the health of the portfolio in terms of risk.

Figure 10-131 Number of Accounts by Credit Rating Report

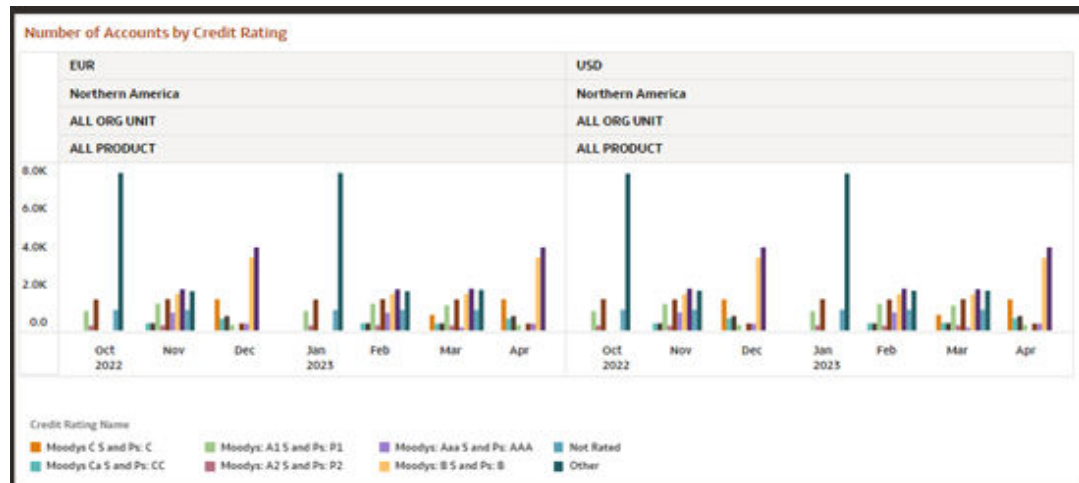


- **X-sell Matrix (Number of Accounts) Report:** This report shows a product wise distribution of the number of accounts that have been X-sold from a specific org unit that is selected from the dropdown, Selecting the leaf level option will display the X-sell Matrix.

Figure 10-132 X-sell Matrix (Number of Accounts) Report

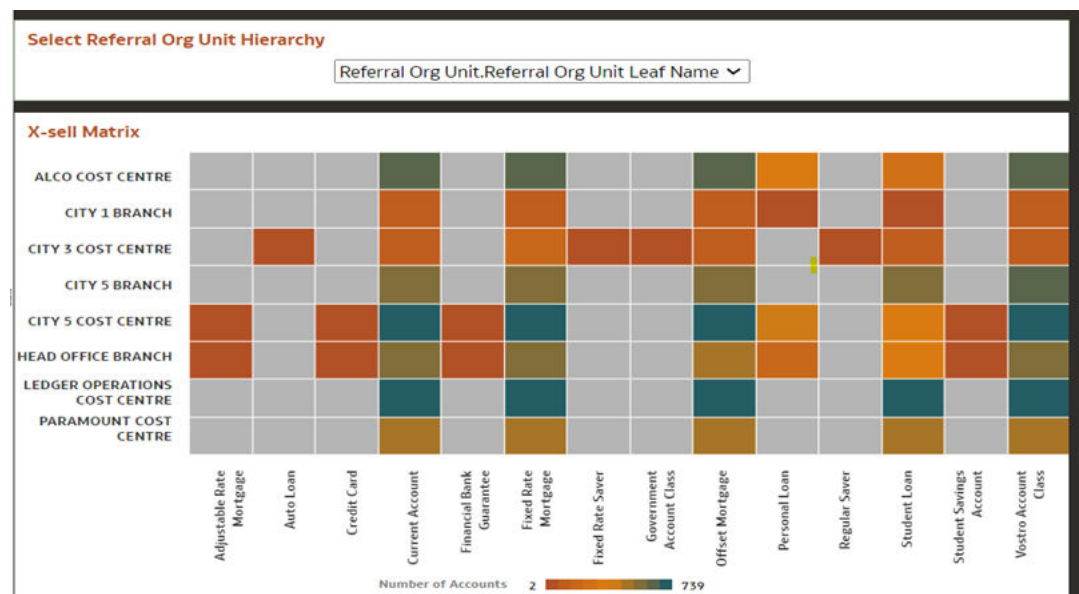

- **New Accounts Trend Report:** This report shows a product wise view of the new account openings during the selected time period. This can also be viewed as per the org unit or region.

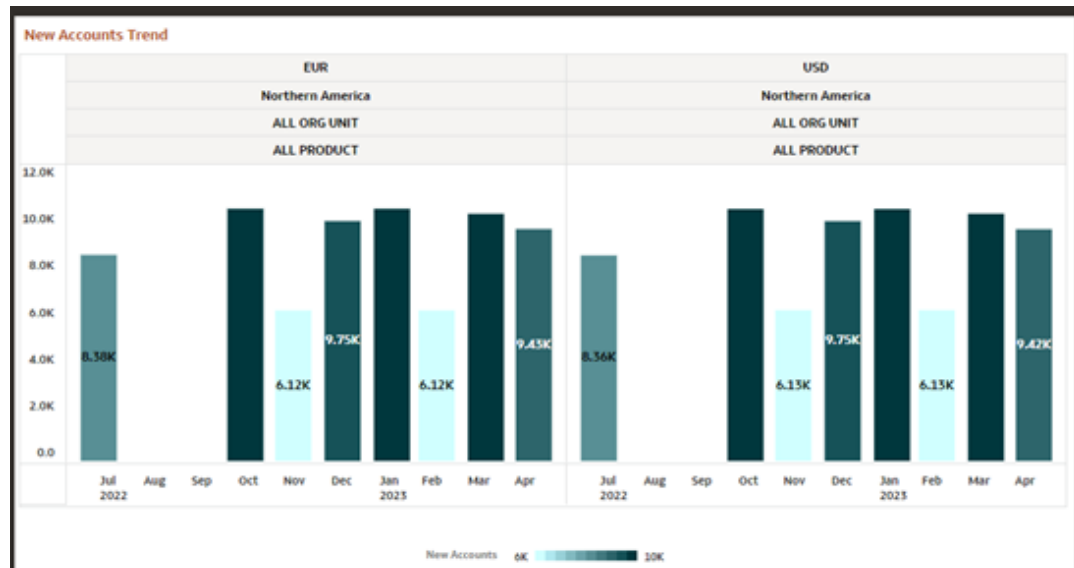Figure 10-133 New Accounts Trend Report

Customer Profitability

To access the Processing Analytics report, from the LHS Menu, select **Analytics**, and then select **Customer Profitability**.

Customer Profitability provides you with the roll-up and drill-down capability on the Instrument level the available levels into for product, region, or channel. This comprehensive view explores various insights around customer details and customer comparison with segments into customer relationships.

Note

Before generating reports and analytics, it is mandatory to set the relevant currencies and currency rates. This is required for generating the reports with correct values. For more information about creating currencies and currency rates, see the following:

- [Currencies](#)
- [Currency Rates](#)

To feed the Customer Profitability Report, refer to the *Oracle Financial Services Profitability Analytics Cloud Service Data Flow* document available at [Doc ID: 2869409.1](#).

For the Customer Profitability Report, refer to the following Data Flow sub-sections:

- PACS - Instrument Summary
- PACS – Instrument Income Statement
- PACS – Instrument Segmentation
- PACS - Customer and Account
- PACS – Instrument Life Time Value
- PACS – Customer Group Income Statement

- PACS – Instrument Segmentation Movements

For Income Statement and Balance Sheet Hierarchies, or any other Hierarchy created out of Financial Element dimension, a Financial Element carrying a percentage value cannot be added as a child, Sibling to a child or Leaf under Parent/ Child/ Sibling in the Hierarchy. Users are expected to be mindful not to map a portfolio column to a FE denoting a rate or apply an expression, where a divisor is used in a way that the column value effectively becomes a rate, thus preventing a meaningful roll-up to the node of the hierarchy.

Instrument Level Aggregation and Insights

The Customer Profitability report is arranged as a set of reports, classified into the following:

- Customer Details
- Customer IS
- Customer Life Time Value
- Customer vs Segment
- Segment Comparator
- Segment Analysis
- Segment Income Statement
- Relationship Manager Profitability
- Inter-Segment Movement
- Customer Group Details

Report Common Filters

You can use a series of canvas level pinned Prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-134 Canvas Prompt Filters for Time Dimension



As of Date: You can use this filter to isolate a selected timeframe for the analysis. The following screenshot displays this filter's possible options against the Time Dimension.

Figure 10-135 As of Date Selection

Additional Filters for the Time Dimension are as follows:

- As of Date (Year)
- As of Date (Day)

Figure 10-136 Other Canvas Prompt Filters

As of Date	As of Date	Segment Type	Segment Name	Customer Type Name	LE Hierarchy Name	Legal Entity Leaf Name	Org Hierarchy Name	Org Unit Leaf Name	Prod Hierarchy Name	Prod Leaf Name	Geography Hierarchy Name	Geography Leaf Name	Branch Leaf Name	Industry Leaf Name
Leaf Name	All	All	All	All	Legal Entity System Hierarchy	All	Org Unit System Hierarchy	All	Product System Hierarchy	All	Geographic Location System Hierarchy	All	All	All

- **Customer Type Name:** You can use this filter to select the Customer Type for the underlying Instrument Tables Accounts.
- **LE Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Legal Entity Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “LE Hierarchy Name” must be selected with only a single value simultaneously.
- **Legal Entity Leaf Name:** You can use this filter to select the Legal Entity Leaf Name that is related to the underlying Management Ledger data.
- **Org Hierarchy Name:** This is a mandatory filter for the group filtering on Org Unit Key Processing Dimension. As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “Org Hierarchy Name” must be selected with only a single value simultaneously.
- **Org Unit Leaf Name:** You can use this filter to select the Org Unit Leaf Name corresponding to the hierarchy.
- **Product Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Product Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “Prod Hierarchy Name” must be selected with only a single value simultaneously.
- **Product Leaf Name:** You can use this filter to select the Product Leaf Name corresponding to the hierarchy.

Figure 10-137 Standard Dimensions Prompt Filters

- **Geography Hierarchy Name:** This is a mandatory filter for the group filtering on the Geography Hierarchy.
As the application supports the creation of multiple hierarchies for the same dimension of analysis, to avoid displaying results from multiple hierarchies at the same time, a mandatory driver to select "Geography Hierarchy Name" must be selected.
- **Geography Leaf Name:** You can use this filter to select a specific Geography value at leaf level related to the underlying instrument tables accounts.
- **Branch Leaf Name:** You can use this filter to select a specific Branch value at leaf level related to the underlying instrument tables accounts.
- **Industry Leaf Name:** You can use this filter to select a specific Industry value at leaf level related to the underlying instrument tables accounts.
- **Currency Code:** You can use this filter to select a specific Currency Code for the underlying Instrument Tables Accounts.
- **Segment Type:** You can use this filter to select a specific Segment Type for the Customer Profile.
- **Segment Name:** You can use this filter to select a specific Segment Type under the classification of segmentation Gold, Silver, Platinum, or Bronze.

In-canvas Variable Prompts

Figure 10-138 In-canvas Prompt Filters for Canvas

- **Select Customer Name:** You can use this filter to isolate a selected Customer Name for the analysis.
- **Select Customer Number:** You can use this filter to isolate a selected Customer Number for the analysis.
- **Select Account Number:** You can use this filter to isolate a selected Account Number for the analysis.

The following screenshot displays this filter's possible options against the Customer Dimension.

Customer Details Canvas


The customer profitability analysis detailed summary displays different perspectives of customer and household data.

You can select, a customer name, customer number, or account number. This helps in navigating to the profile belonging to the customer.

For example, Select a specific customer as Jonathan Noel.

This displays data available in detail around the accounts of the selected customer.

Figure 10-139 Canvas Customer Detail

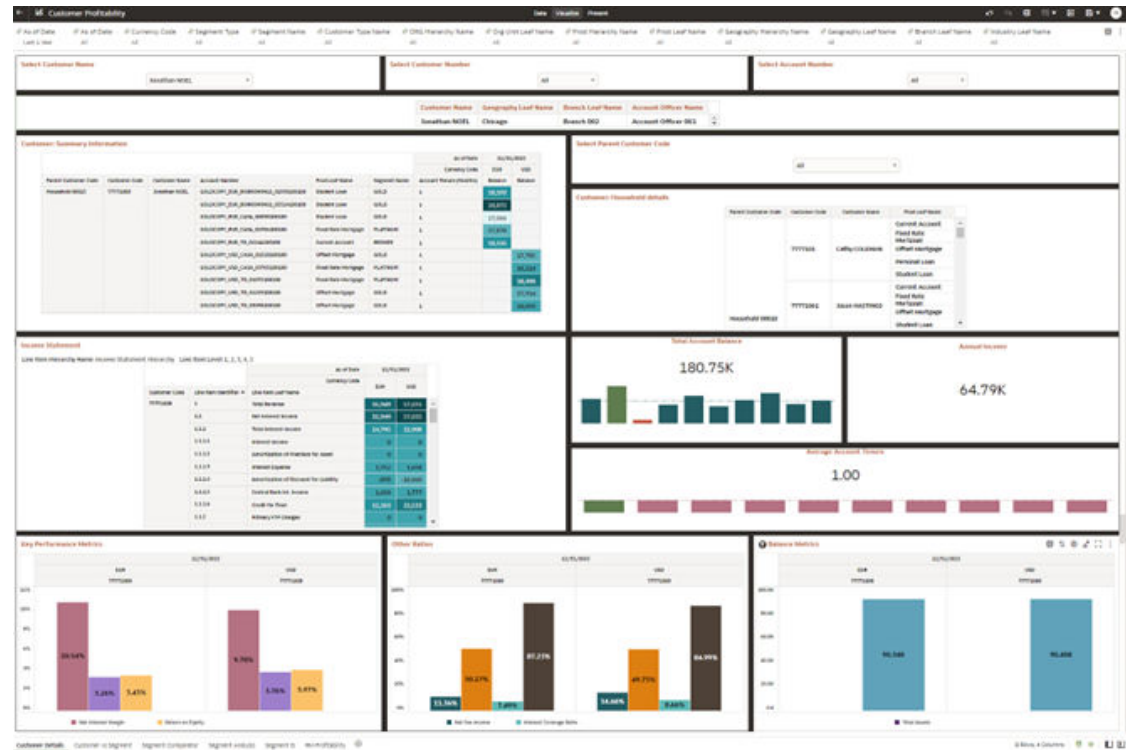

The customer summary information report shows the following details that are of interest to a front office persona:

- Product Holding
- Tenure of the products
- Account Balance
- Segment Information

As per selected dates:

Figure 10-140 Report - Customer : Summary Information

Customer: Summary Information							As of Date	01/31/2022	12/31/2022
							Currency Code	USD	USD
Parent Customer Code	Customer Code	Customer Name	Account Number	Prod Leaf Name	Segment Name	Account Tenure(Months)		Balance	Balance
Household 00015	77771008	Jonathan NOEL	GOLDCOPY_USD_CASA_01520100100	Offset Mortgage	GOLD	1			17,785.00
			GOLDCOPY_USD_CASA_02581100100	Fixed Rate Mortgage	PLATINUM	1		18,611.00	
			GOLDCOPY_USD_CASA_02589100100	Current Account	BRONZE	1		18,855.00	
			GOLDCOPY_USD_CASA_03703100100	Fixed Rate Mortgage	PLATINUM	1			18,114.00
			GOLDCOPY_USD_TD_01072100100	Fixed Rate Mortgage	PLATINUM	1			18,496.00
			GOLDCOPY_USD_TD_01229100100	Offset Mortgage	GOLD	1			17,914.00
			GOLDCOPY_USD_TD_03098100100	Offset Mortgage	GOLD	1			18,093.00

This report shows details of the banks customers who belong to the same household as that of the selected customer. The customer names are displayed along with the product holdings. In a wholesale context, this shows the subsidiaries of the selected customer.

Figure 10-141 Report - Customer: Household Details

Select Parent Customer Code			
Household 00015			
Customer: Household details			
Parent Customer Code	Customer Code	Customer Name	Prod Leaf Name
	77770042	Nancy BOYD	Fixed Rate Mortgage
	77770087	Erika LANE	Current Account
	77770203	Robyn BARKER	Offset Mortgage
	77770204	Willie NORRIS	Current Account
	77770209	Stephanie STEELE	Fixed Rate Mortgage
	77770212	Evan DOMINGUEZ	Student Loan
	77770391	Lindsay PATRICK	Current Account
			Student Loan

This report shows the P&L statement for the selected customer. The view is very detailed with all line item leaves. The view can however be compressed by selecting the appropriate level filter.

Figure 10-142 Report Income Statement Details


Income Statement

Line Item Hierarchy Name: Income Statement Hierarchy Line Item Level: All

		As of Date	12/31/2022
		Currency Code	USD
Customer Code	Line item identifier	Line item Leaf Name	Amount
77771008	0	Income Statement	-412,170
	1	Total Revenue	685,764
	1.1	Net interest income	685,764
	1.1.1	Total interest income	121,635
	1.1.1.1	Interest income	0
	1.1.1.2	Amortization of Premium for Asset	0
	1.1.1.3	Interest Expense	28,014
	1.1.1.4	Amortization of Discount for Liability	-219,903
	1.1.1.5	Central Bank Int. Income	25,491
	1.1.1.6	Credit for Float	788,033


This tile shows a the total balances held by the customer at the bank across asset and liability products. The bars show the amounts for the individual products that are held by the customer, details of which can be viewed via mouseover.

Figure 10-143 Tile - Total Account Balance

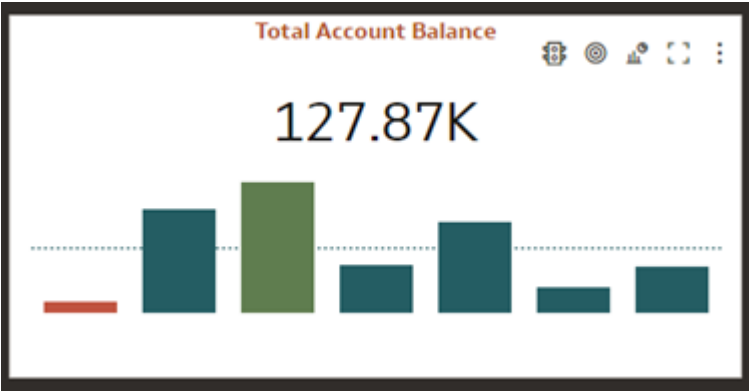


This tile shows the customer income in terms of his salary or compensation. For a wholesale customer, this would be the net profits of the enterprise.

Figure 10-144 Tile - Annual Income

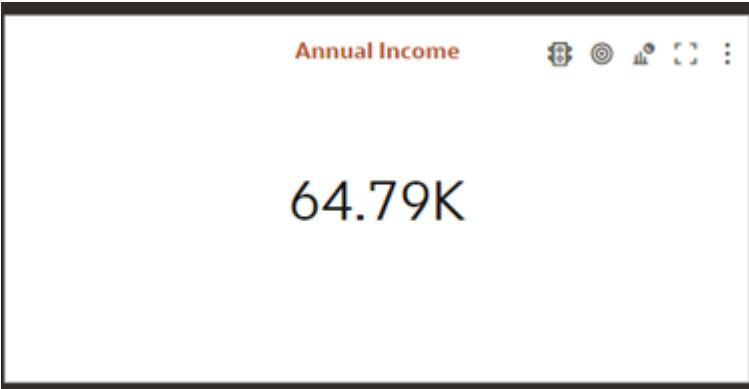


This tile shows the average account tenure of the customer at the bank across all his accounts. The bars show the tenures for the individual products/ accounts that are held by the customer, details of which can be viewed via mouseover.

Figure 10-145 Tile - Average Account Tenure




This report displays the NIM, RAROC, ROTA and ROE for the selected customer, aggregated from the customer accounts.

Figure 10-146 Report Key Performance Metrics

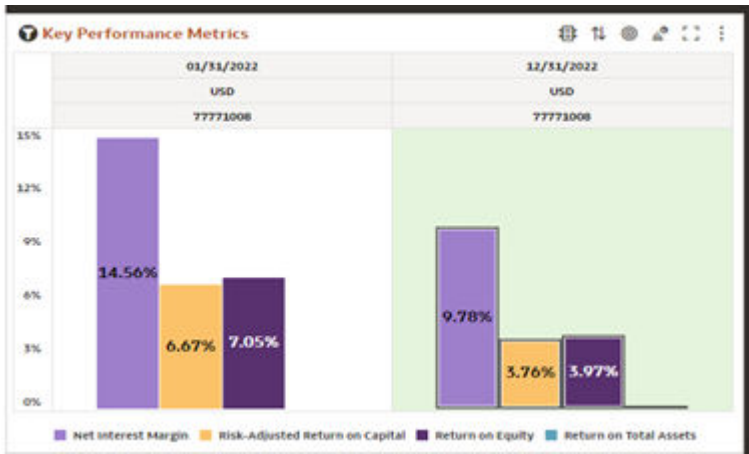


This report displays the NFI, GII, Interest Coverage and OpEx for the selected customer, aggregated from the customer accounts.

Figure 10-147 Report - Other Ratios

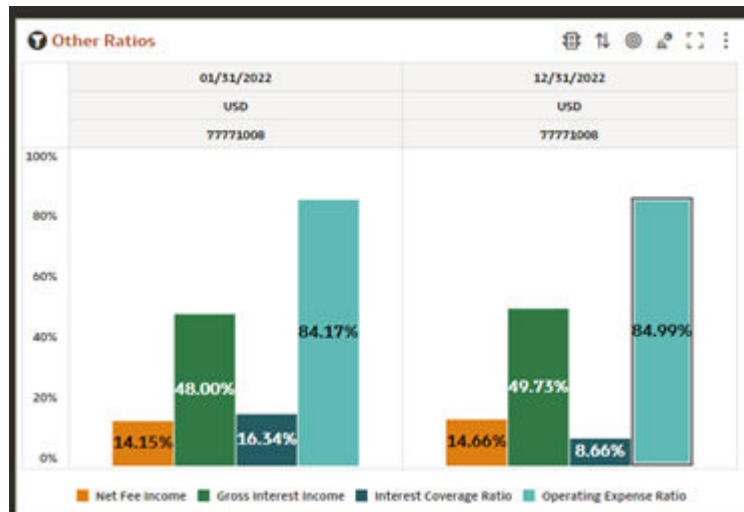

This report gives a view of the asset and liability balances of the customer as held at the bank across time periods.

Figure 10-148 Report - Balance Metrics

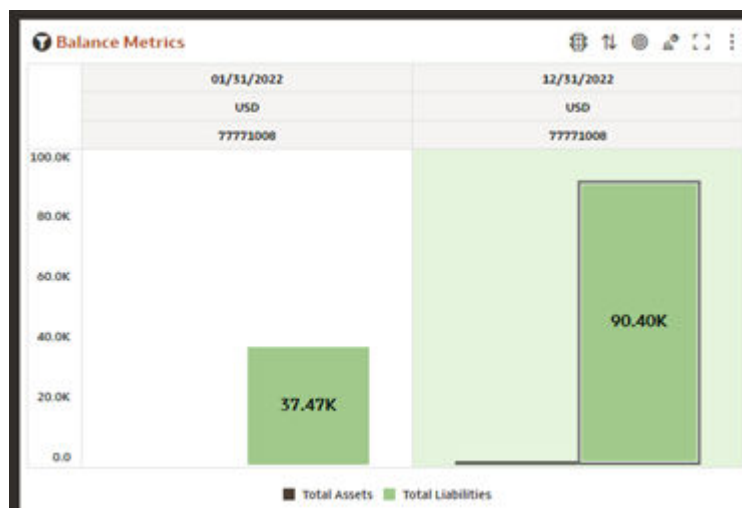

Customer Life Time Value

To access the Customer Life Time Value report, from the LHS Menu, select **Analytics**, select **Customer Profitability**, and then select **Customer Life Time Value**.

Refer to the Runchart available at [Doc ID: 2869409.1](#), then select and execute the **Instrument Life Time Value** with corresponding prerequisites mentioned in the **Index** tab of the Runchart.

To feed the Customer Life Time Value Report, refer to the *Oracle Financial Services Profitability Analytics Cloud Service Data Flow* document available at [Doc ID: 2869409.1](#).

For the Customer Life Time Value Report, refer to the following Data Flow sub-section:

- **PACS – Instrument Life Time Value**

CLTV – Customer Life time Value Calculation Method

We are looking at MTD account level NIBT values and then projecting into the future, the same using the Holt Winters algorithm available in the Oracle database. For arriving at CLTV, the first 30 months get forecasted and forecasts for the subsequent months are capped at the value of the 30th forecast obtained. In essence, we have the total account level NIBT contribution generated till date along with the forecasted contribution for 12, 36 and 60 months into the future. The future contributions for 1, 3 and 5 years are discounted using a discount factor to convert into a present value of future Cash Flows. The combined NIBT contribution generated till date and present value of future discounted Cash Flows give us the account level Lifetime value.

All the designated accounts of the customer are aggregated to arrive at the Customer Lifetime Value.

Sample of a hypothetical calculation method: Customer A has fairly constant NIBT at 100K USD every month (a bit variance here and there) whereas Customer B has an increasing NIBT (start with 80K USD and reaching 120K USD). Both have same CLTV Till Date, but Customer B will have higher forecasted CLTV (5 year) since monthly YTD NIBT shows increasing trend for customer B.

Customer Life time Value Analytics Metrics


- **Total Forecast Income:** calculated as **Total Forecast Net Income Before Taxes** (discounted for present value using the discount factor that has been set up from Preferences UI), the chart shows value for customer accounts as bar including min/max and average value via mouse over the tile chart
- **Customer Life Time Value (Till Date):** calculated as the aggregated value of monthly **Net Income Before Taxes** for latest 36 months.
- The value of **Customer Life Time Value** with n year projection (where n = 1,3,5 with each year having 12 monthly forecasts) is arrived at by adding the discounted forecasts for Net Income Before Taxes to the **Customer Life Time Value (Till Date)** over next n years. Two customers with same **Customer Life Time Value (Till Date)** may have different **CLTV (5 Yr projection)** if they exhibit different trends. The customer showing growth in his portfolio (Net Income Before Taxes) will be expected to have a higher **CLTV (5 Yr projection)**.
 - CLTV (1 Yr projection)
 - CLTV (3 Yr projection)
 - CLTV (5 Yr projection)

Figure 10-149 Customer Life Time Value - 5 years

Total Forecast Income 79.17M 	Customer Life Time Value (Till Date) 73.86M	CLTV (1 Yr projection) 91.71M
	CLTV (5 Yr projection) 124.23M	CLTV (5 Yr projection) 153.04M

The aforementioned CLTV – Customer Life time Value Analytics metrics are available in the out-of-the-box Customer Profitability Report as well as in the following subject area (the available granularity for these metrics is at account contract level):

Figure 10-150 Customer Life Time Value

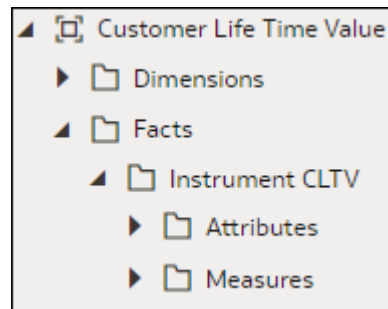

Customer vs Segment

This dashboard presents the customer as a comparison with the segment that he belongs to or any other segment of interest to the analyst.

For example, Select a specific customer as Jonathan Noel.

Exploring metrics around the customer's annual income, the net income before taxes, the number of accounts belonging to the customer, credit score, and others.

Next, you can view the number of transactions across the different channels. And track the dimensional analysis for the average transaction amount.

Figure 10-151 Canvas Customer vs Segment




Report – Customer : Summary Key Attributes: This report displays the following customer attributes:

- Credit Score/ Credit Rating as is the case for a Retail or Wholesale customer
- Segment
- Annual Income
- NIBT
- # Accounts

This report gives a view across selected time periods.


Figure 10-152 Report – Customer : Summary Key Attributes

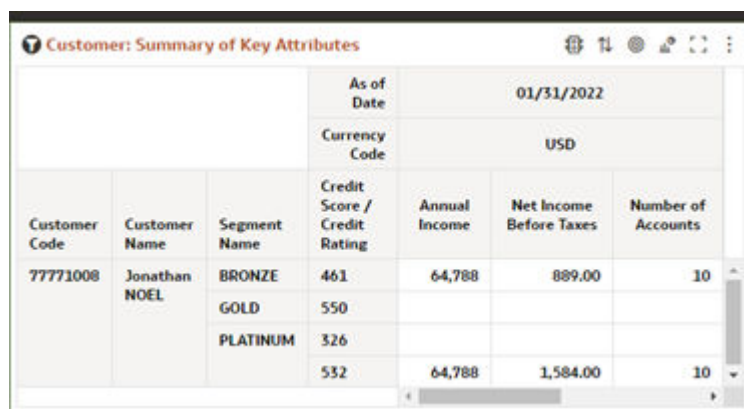

			As of Date	01/31/2022		
			Currency Code	USD		
Customer Code	Customer Name	Segment Name	Credit Score / Credit Rating	Annual Income	Net Income Before Taxes	Number of Accounts
77771008	Jonathan NOEL	BRONZE	461	64,788	889.00	10
		GOLD	550			
		PLATINUM	326			
			532	64,788	1,584.00	10


Report Total Number of Transactions by Channel: This report gives a view of the total number of transactions in different channels across time periods.

Figure 10-153 Report Total Number of Transactions by Channel

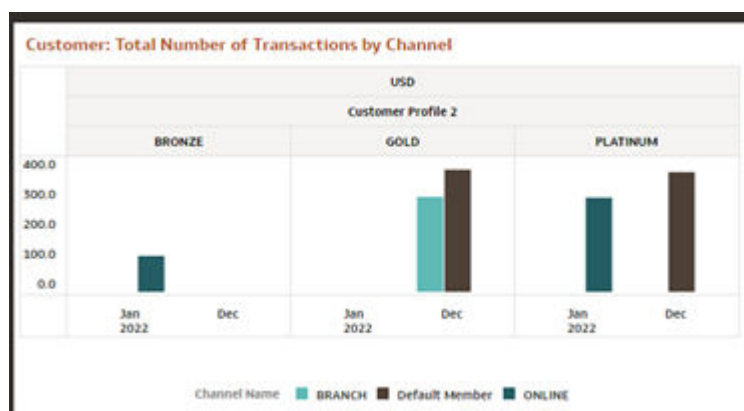

Report : Average Transaction Amount by Channel: This report gives a view of the average transaction amounts in different channels across time periods.

Figure 10-154 Report : Average Transaction Amount by Channel

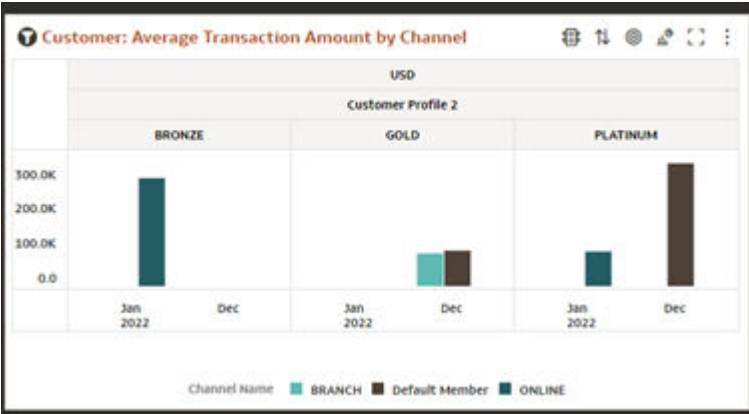

In-canvas Prompt Filter to select Segment for comparison

Figure 10-155 In-canvas Prompt Filter to select Segment for comparison




Report : Segment Summary Key Attributes

Figure 10-156 Report : Segment Summary Key Attributes

Segment: Summary of Key Attributes											
Segment Type	Segment Name	Credit Score / Credit Rating	Currency Code	01/11/2022				12/11/2022			
				USD				USD			
Customer Profile 2	BRONZE	515		Annual Income	Net Income Before Taxes	Number of Customers	Number of Accounts	Annual Income	Net Income Before Taxes	Number of Customers	Number of Accounts
		515		46,015	3,371.29	477	714	43,295	3,155.18	270	780
	GOLD	519		Annual Income	Net Income Before Taxes	Number of Customers	Number of Accounts	Annual Income	Net Income Before Taxes	Number of Customers	Number of Accounts
		512		46,246	3,361.54	714	3,321	42,078	3,089.47	238	5,723
	PLATINUM	545		Annual Income	Net Income Before Taxes	Number of Customers	Number of Accounts	Annual Income	Net Income Before Taxes	Number of Customers	Number of Accounts
	514			46,200	4,230.97	470	912	43,224	4,738.17	182	915
	545							43,384	7,221.40	3	3


Report : Average Number of Transactions by Channel for selected Segment

Figure 10-157 Report : Average Number of Transactions by Channel for selected Segment

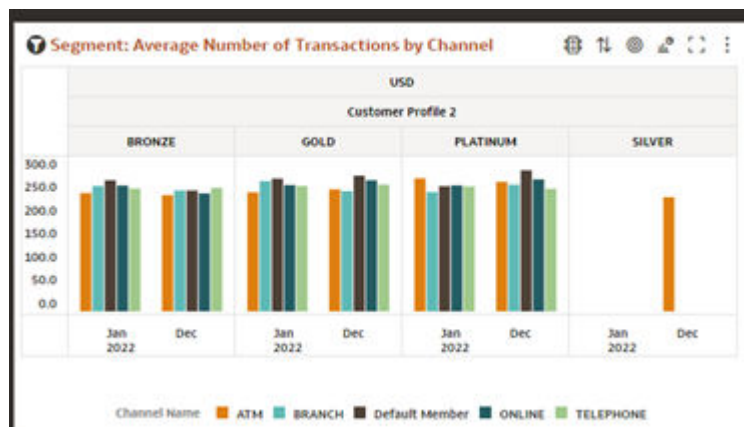

Report : Average Transaction Amount by Channel for selected segment

Figure 10-158 Report : Average Transaction Amount by Channel for selected segment

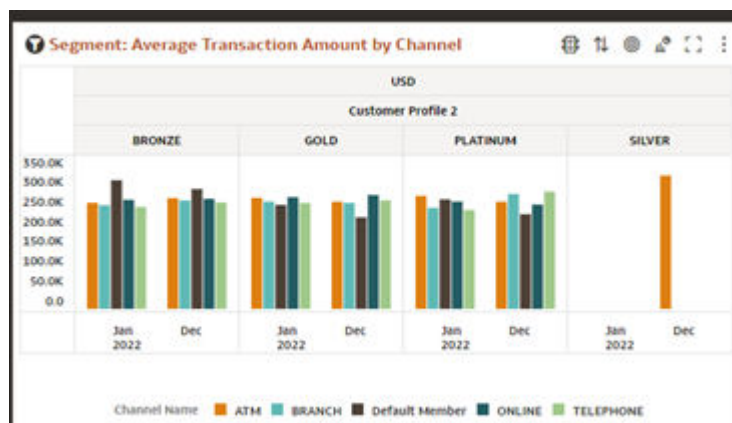

Segment Comparator

In this dashboard, the dimensions and attributes are compared across Segments.


For instance, segment 1 versus segment 2.

Currently, the comparison exists for Industry, Product Distribution, Net Income Before Taxes, Customer Annual Income, and Credit Score. This comparison can be analysed across time periods.

Note that if it's a retail customer rather than a wholesale one, you can move from the actual industry to the profession. The same logic is applicable for Credit Score and Credit Rating.


Note that The segment Type for the purposes of the illustration is Demographic (for retail use case).

Figure 10-159 Canvas Segment Comparator

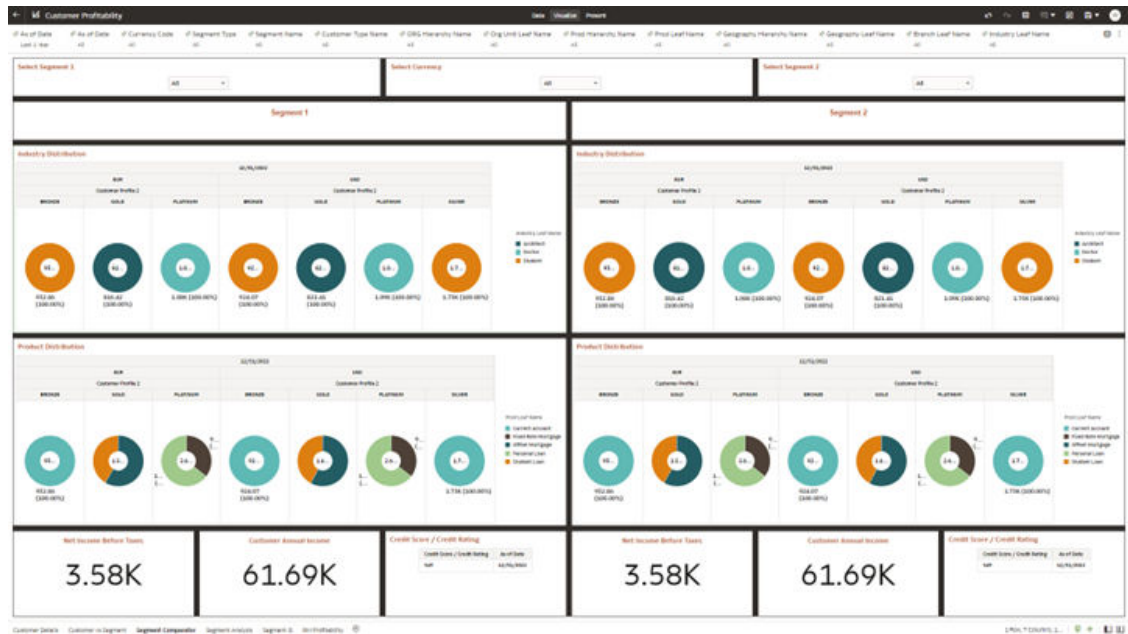


- **Segment 1:** You can use this filter to select, for a specific Segment Type the specific segmentation scheme - Gold, Silver, Platinum, or Bronze.


Figure 10-160 In-canvas Prompt Filters for Segment 1

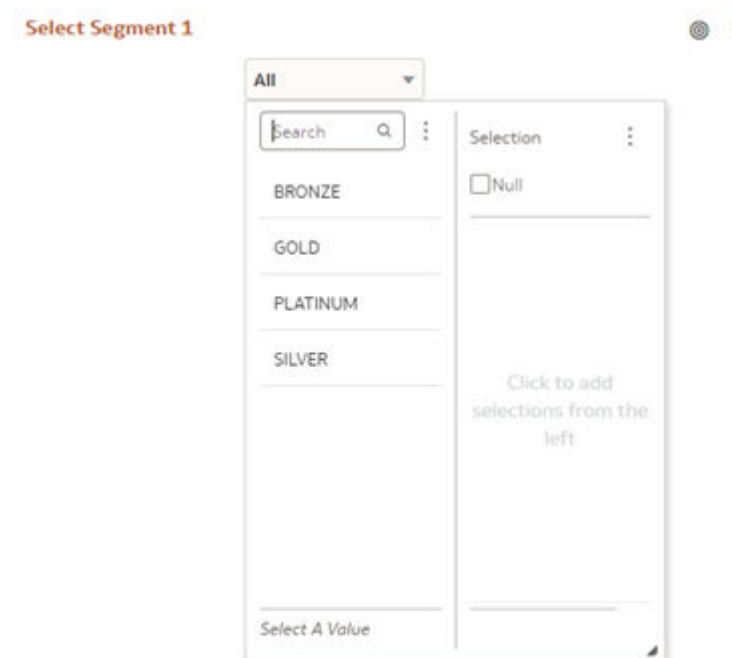

- **Currency Code:** You can use this filter to select a specific Currency Code for the underlying Instrument Tables Accounts.

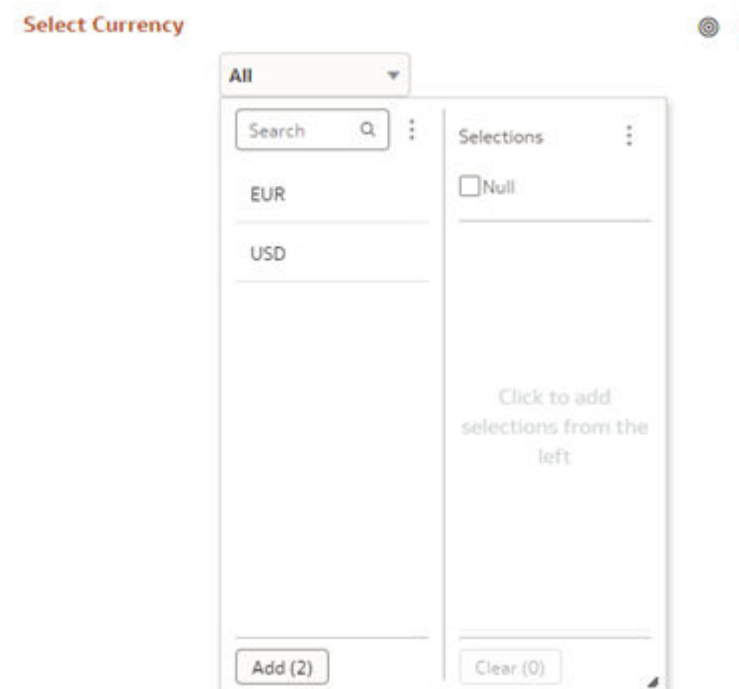Figure 10-161 In-canvas Prompt Filters for Currency

- **Segment 2:** You can use this filter to select, for the Segment Type corresponding to Segment 1, the specific segmentation scheme against which you want to compare Segment 1 selection with.

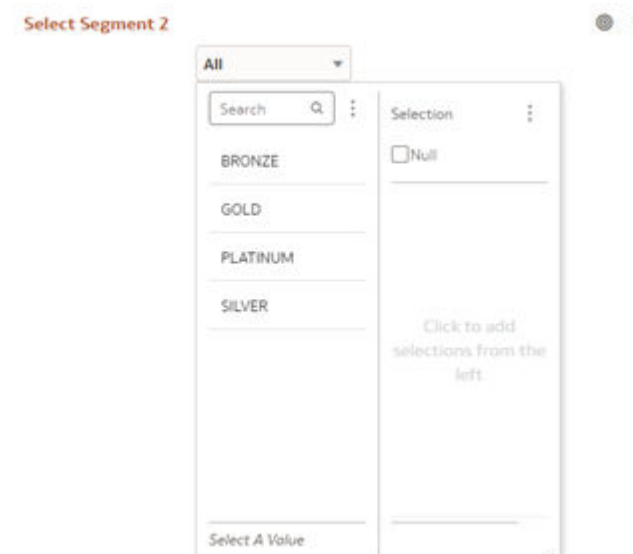Figure 10-162 In-canvas Prompt Filters for Segment 2


Report Segment 1 - Industry and Product Distribution: This report gives a view of the Industry/ Profession and Product Distribution of Segmentation scheme selected as Segment 1 across time periods.

Figure 10-163 Report Segment 1 - Industry and Product Distribution




This report gives a view of the Average NIBT, average customer income and average credit score/distribution of credit ratings of Segmentation scheme selected as Segment 1 across time periods.

Figure 10-164 Report Segment 1 Details

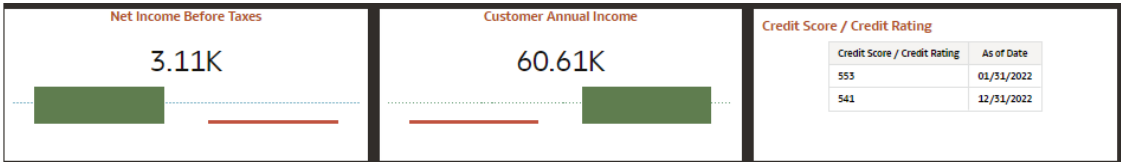


Report Segment 2 - Industry and Product Distribution: This report gives a view of the Industry/ Profession and Product Distribution of the comparator Segmentation scheme selected as Segment 2 across time periods.

Figure 10-165 Report Segment 2 - Industry and Product Distribution

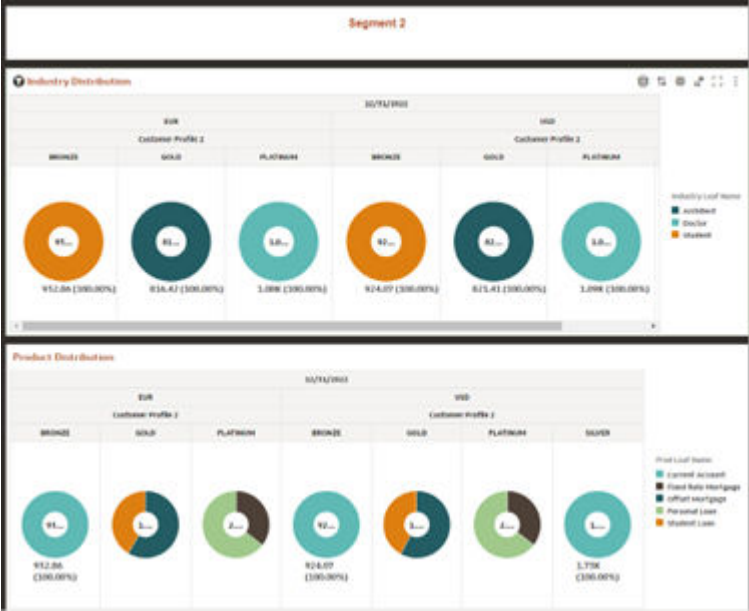

This report gives a view of the Average NIBT, average customer income and average credit score/ distribution of credit ratings of the comparator Segmentation scheme selected as Segment 2 across time periods.

Figure 10-166 Report Segment 2 Details

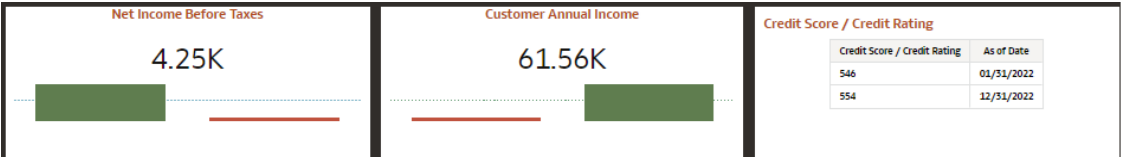

Segment Analysis

This canvas provides Detailed Analysis at the Segment Level (for all Segments and Segment Types as defined by the user).

You can use a series of Report Prompts, as previously described, to filter the data. In addition, there are In-Report prompt selections to select the Top/ Bottom N org units that you are interested in and the corresponding data will be displayed.

Figure 10-167 Canvas Segment Analysis


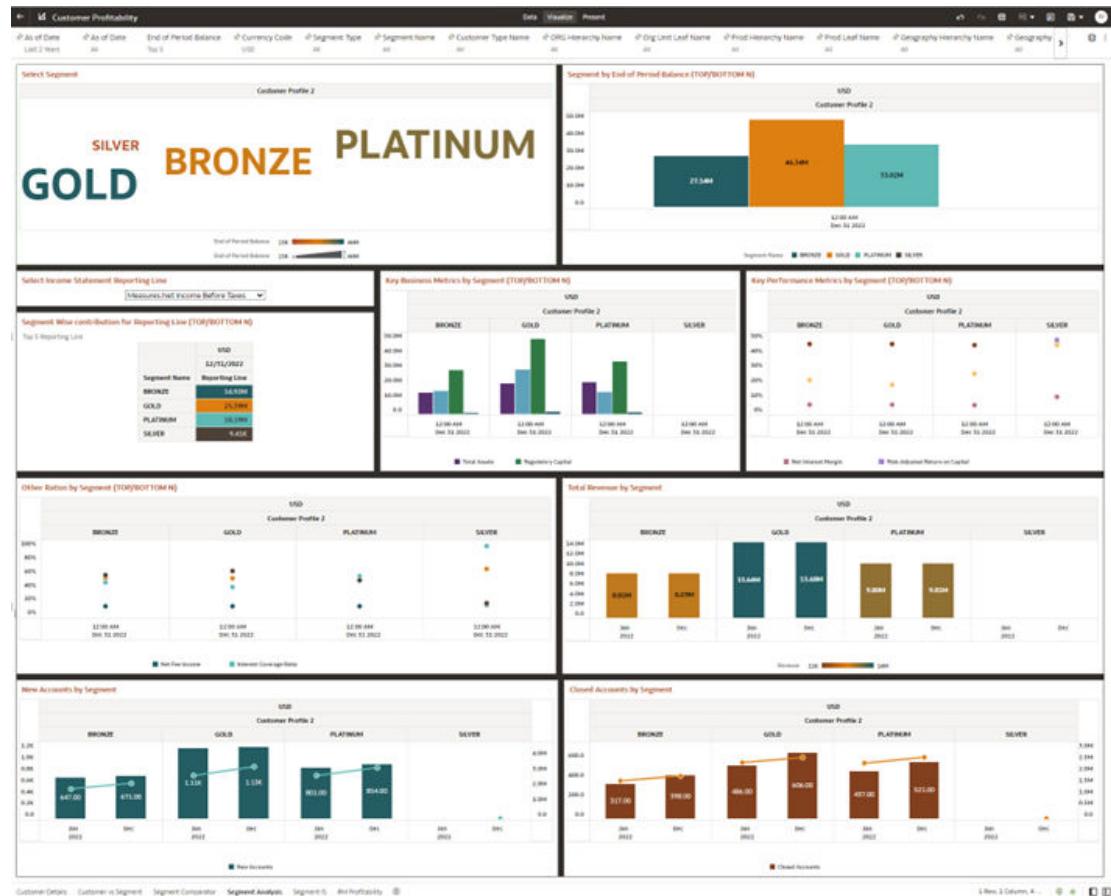



Figure 10-168 Target Cloud for Segment Type - Customer Profile 2

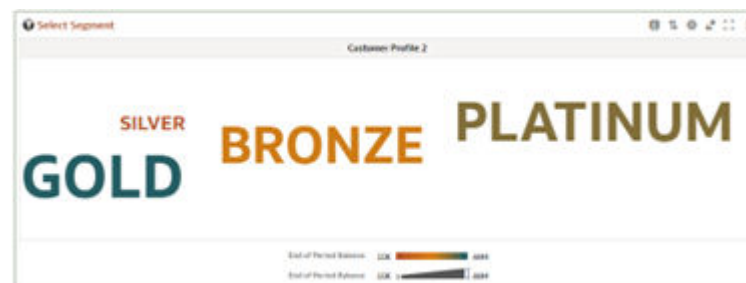


Report - Segment by End of Period Balance (Top/Bottom N): The chart displays the Top N (N selected from the chart prompt) and bottom N Segments sorted in a descending order by End of Period Balances.

Figure 10-169 Report - Segment by End of Period Balance (Top/Bottom N)**Figure 10-170 In-canvas Prompt Filter Income Statement Report Line**


Report - Segment Wise contribution for Report Line (Top/ Bottom N): In this chart, for the selected reporting line, the Top N (N selected from the chart prompt) and bottom N Segments are displayed in descending order of value of the reporting line.

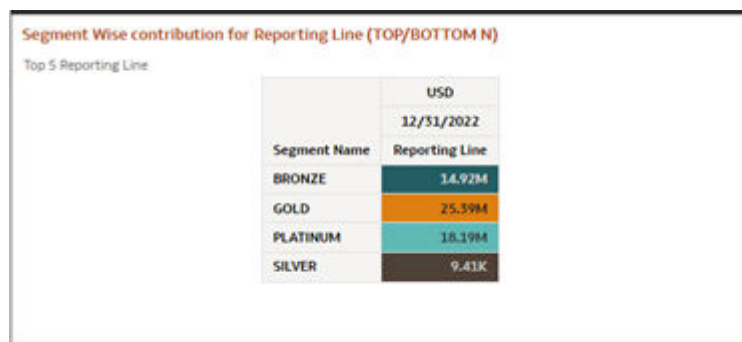Figure 10-171 Report - Segment Wise contribution for Report Line (Top/ Bottom N)

Report - Key Business Metrics by Segment (Top/ Bottom N): The chart displays the Top N (N selected from the chart prompt) and bottom N Segments sorted in a descending order by End of Period Balances and provides the break up between Asset and Liability Balances along with Regulatory and Economic Capital.

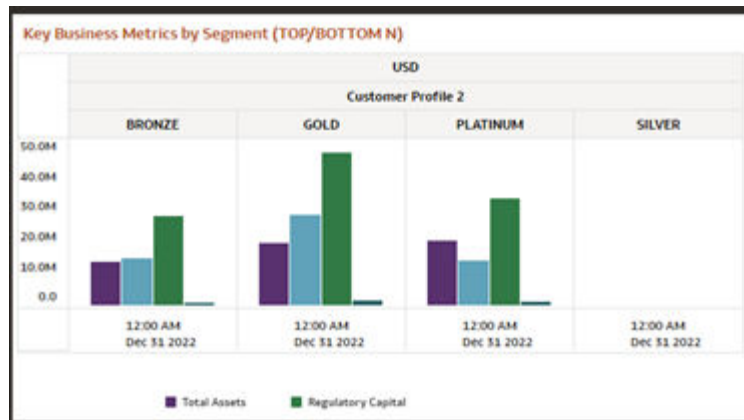Figure 10-172 Report - Key Business Metrics by Segment (Top/ Bottom N)

Report - Key Performance Metrics by Segment (Top/ Bottom N): The chart displays the Top N (N selected from the chart prompt) and bottom N Segments sorted in a descending order by End of Period Balances and provides selected KPI's like NIM, RAROC, ROE and ROTA of these Segments.

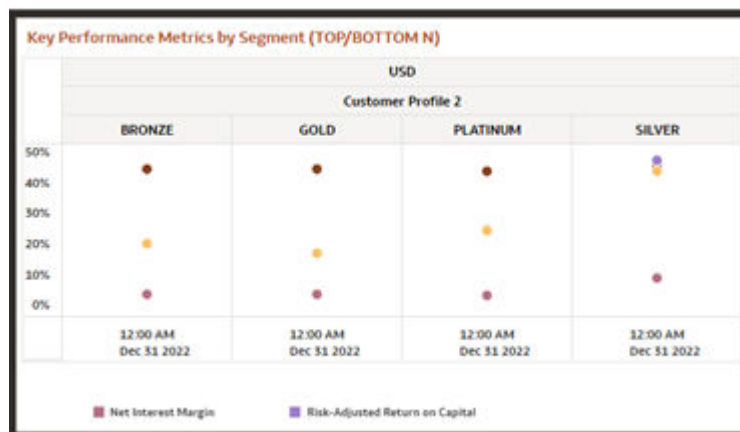Figure 10-173 Report - Key Performance Metrics by Segment (Top/ Bottom N)

Report - Other Ratios by Segment (Top/ Bottom N): The chart displays the Top N (N selected from the chart prompt) and bottom N segments sorted in a descending order by End of Period Balances and provides selected business metrics like Net Fee Income, Gross Interest Income, Interest Coverage Ratio and Debt coverage ratio, all expressed as percentages.

Figure 10-174 Report - Other Ratios by Segment (Top/ Bottom N)



Report - Total Revenue by Segment (Top/ Bottom N): The chart displays the Top N (N selected from the chart prompt) and bottom N Segments sorted in a descending order of Revenues of these Segments.

Figure 10-175 Report - Total Revenue by Segment (Top/ Bottom N)




Report - New Accounts by Segment: The chart displays the Top N (N selected from the chart prompt) and bottom N Segments sorted in a descending order of number of new accounts of these Segments across time periods.

Figure 10-176 Report - New Accounts by Segment



Report - Closed Accounts by Segment: The chart displays the Top N (N selected from the chart prompt) and bottom N Segments sorted in a descending order of number of closed accounts of these Segments across time periods.


Figure 10-177 Report - Closed Accounts by Segment

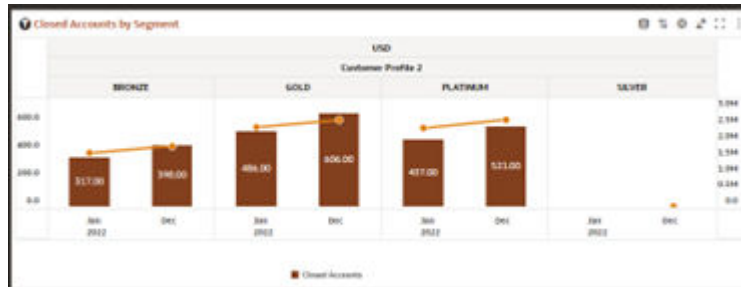

Segment Income Statement

In this dashboard, Detailed Income Statement at Segment Level (for all Segments within selected Segment Type, as defined by the user) can be viewed.

Figure 10-178 Canvas Segment Income Statement

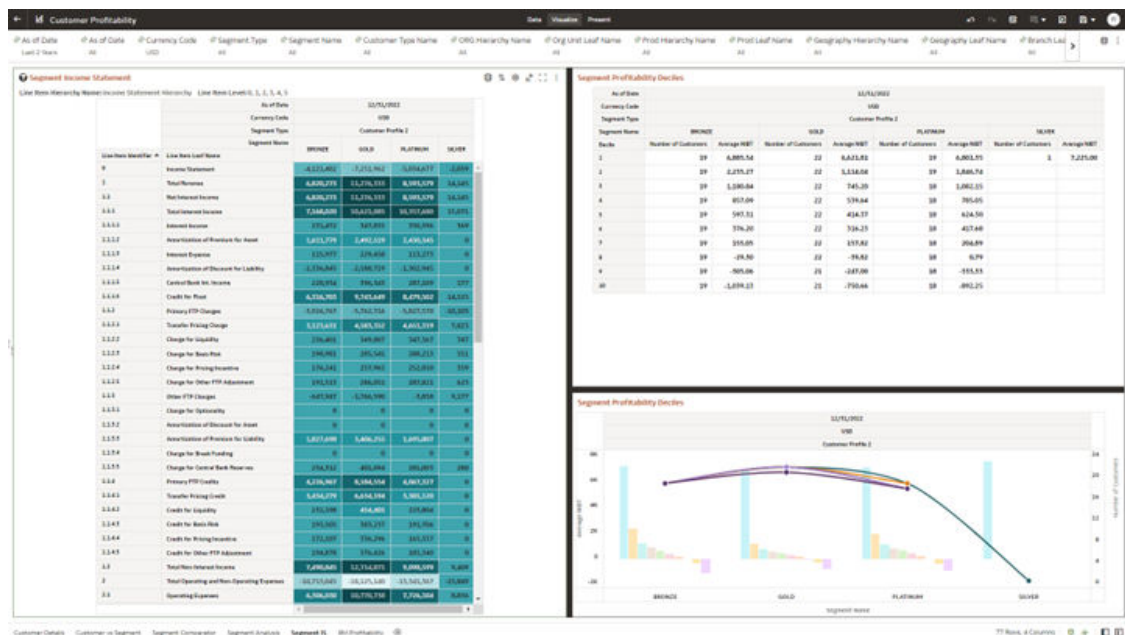

Report : Segment Income Statement: This view provides Detailed Segment level Income Statement in same format, as can be seen in other detailed income statements.

Figure 10-179 Report : Segment Income Statement

Segment Income Statement

Line Item Hierarchy Name: Income Statement Hierarchy Line Item Level: 0, 1, 2, 3

As of Date: 12/31/2022

Currency Code: USD

Segment Type: Customer Profile 2

Line Item Identifier #	Line Item Leaf Name	BRONX	QUR	PLATINUM	QUR
0	Income Statement	6,333,482	7,373,362	5,874,677	5,899
1	Total Revenue	6,808,778	11,276,513	6,993,579	14,341
1.1	Net Interest Income	6,808,778	11,276,513	6,993,579	14,341
1.1.1	Total Interest Income	1,386,888	10,821,885	35,317,686	13,071
1.1.2	Primary FTP Charges	-1,024,767	-5,763,724	-6,821,079	14,341
1.1.3	Other FTP Charges	-647,947	5,766,386	5,804	9,571
1.1.4	Primary FTP Credits	6,336,613	6,384,514	6,867,519	0
1.2	Total Net Interest Income	7,486,645	11,714,675	6,986,589	6,469
2	Total Operating and Non-Operating Expenses	-10,713,885	-10,125,345	-13,741,367	13,895
2.1	Operating Expenses	6,386,838	10,775,718	1,726,388	1,916
2.2	Non-Operating Expenses	6,807,889	7,349,627	5,823,889	1,979
3	Income Before Taxes	-3,893,771	6,866,807	6,747,799	3,766
4	Tax Adjustments	0	0	0	0
4.1	Charges	0	0	0	0
4.2	Credits	0	0	0	0
5	Net Income Before Taxes	-3,893,771	6,866,807	6,747,799	3,766
6	Taxes	-108,758	-807,095	-284,884	891
6.1	Tax Expense	-108,758	-807,095	-284,884	911
7	Net Income After Taxes	-4,002,529	7,253,902	6,462,915	2,875

Table Segment Profitability Deciles: For a selected Segment type, the profitability deciles table show the customer distribution across the different segments and shows income generated by customers of these segments in a decile view, the top decile showing the most profitable customers of the segment. This # customers and average NIBT can be compared across segments for the selected segment type.

Figure 10-180 Table Segment Profitability Deciles

Segment Profitability Deciles

As of Date: 12/31/2022


Currency Code: USD

Segment Type: Customer Profile 2

Decile	Number of Customers	Average NIBT	Number of Customers	Average NIBT	Number of Customers	Average NIBT	Number of Customers	Average NIBT
1	29	6,895.54	22	6,625.81	29	6,861.55	1	7,225.00
2	29	2,235.27	22	3,334.04	29	3,446.74		
3	29	1,380.84	22	745.20	28	1,082.15		
4	29	817.09	22	578.64	28	381.05		
5	29	-997.51	22	434.57	28	424.50		
6	29	576.20	22	936.25	28	457.68		
7	29	155.05	22	157.82	28	204.89		
8	29	-26.30	22	-79.82	28	0.79		
9	29	-305.04	21	-247.00	28	-153.33		
10	29	-1,079.33	21	-750.44	28	-942.25		

Canvas Segment Profitability Deciles: For a selected Segment type, the profitability deciles chart, visually shows the customer distribution across the different segments and shows income generated by customers of these segments in a decile, the top decile showing the most profitable customers of the segment. This # customers is shown by the line chart and average NIBT shown by the bars in this double axis chart.


Figure 10-181 Canvas Segment Profitability Deciles

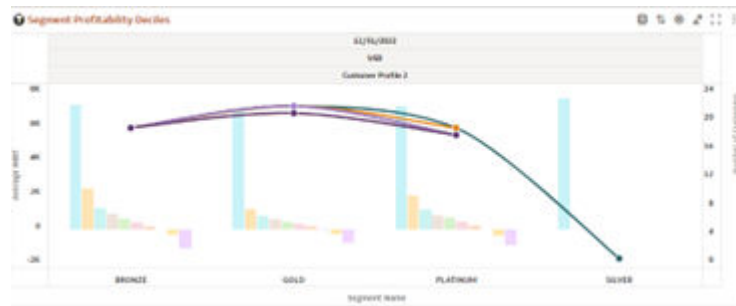

RM Profitability

In this canvas, Relationship manager performance can be monitored at multiple dimensions – You can choose Choose Relationship manager (Account Officer) hierarchy in the dropdown and understand profitability at individual and org level.

Figure 10-182 Canvas RM Profitability

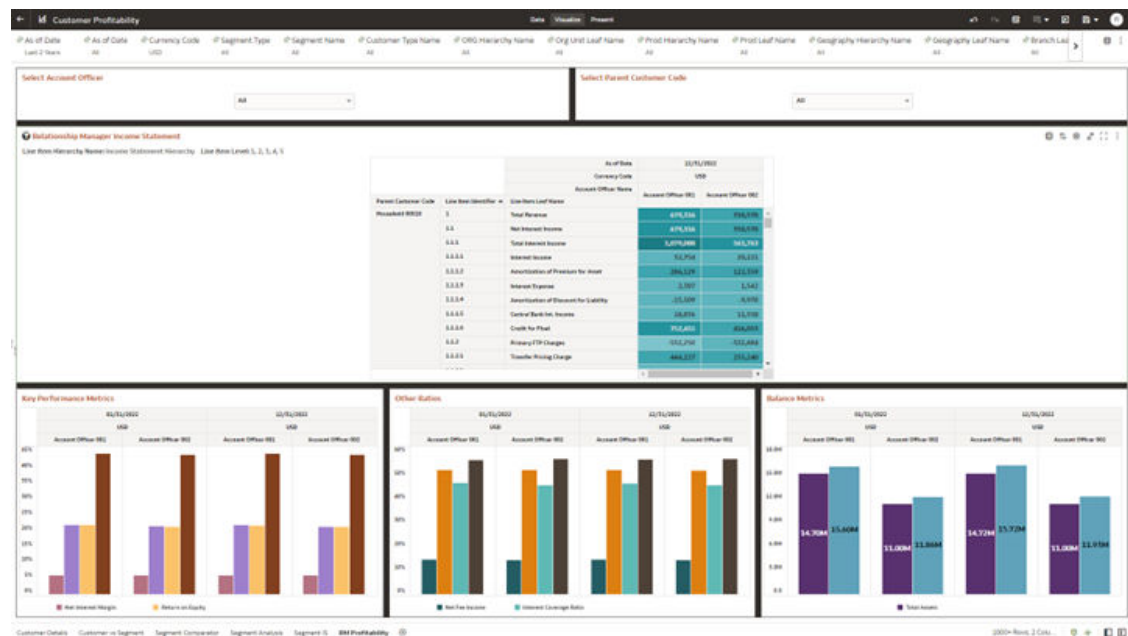

Account Officer: You can use this filter to select all or specific Account Officer.

Figure 10-183 In-canvas Prompt Filter Account Officer

Select Account Officer

All

Search

Account Officer 001

Account Officer 002

Selection

☐ Null

Click to add selections from the left

Select A Value

Parent Customer Code: You can use this filter to select all or specific Parent Customer Code, which specifically supports wholesale use cases for customer Group structures.

Figure 10-184 Parent Customer Code

Select Parent Customer Code

All

Search

Household 00010

Household 00011

Household 00012

Household 00013

Household 00014

Household 00015

Household 00016

Selections

☐ Null

Click to add selections from the left

Add (51)

Clear (0)

Report - Relationship Manager Income Statement: The report shows a detailed Income statement at the level of the relationship manager for selected customer group for accurate Expense Analysis & Revenue breakdowns with a view of overall income generated to the bank.

Figure 10-185 Report - Relationship Manager Income Statement

Relationship Manager Income Statement
Line Item Hierarchy Name: Income Statement Hierarchy Line Item Levels: 1, 2, 3

		As of Date	12/31/2022	
		Currency Code	USD	
		Account Officer Name	Account Officer 001	Account Officer 002
Parent Customer Code	Line Item Identifier	Line Item Leaf Name		
Newark0010000	1	Total Revenue	679,136	399,170
	1.1	Net Interest Income	679,136	399,170
	1.1.1	Total Interest Income	1,079,086	543,763
	1.1.2	Primary FTP Charges	-552,250	-512,484
	1.1.3	Other FTP Charges	55,700	54,163
	1.1.4	Primary FTP Credits	66,770	13,129
	1.2	Total Non-Interest Income	456,811	348,600
	2	Total Operating and Non-Operating Expenses	-977,509	-577,922
	2.1	Operating Expenses	528,680	292,384
	2.2	Non-Operating Expenses	-448,829	-285,538
3		Income Before Taxes	-349,762	-173,752

Report - Key Performance Metrics: The report shows the following KPI's – NIM, RAROC, ROE and ROTA at the level of the relationship manager for selected customer group.

Figure 10-186 Report - Key Performance Metrics




Report - Other Ratios: The report shows the following selected business metrics like Net Fee Income, Gross Interest Income, Interest Coverage Ratio and Debt coverage ratio, all expressed as percentages, at the level of the relationship manager for selected customer group.

Figure 10-187 Report - Other Ratios



Report - Balance Metrics: The report shows Asset and Liability Balances at the level of the relationship manager for selected customer group.


Figure 10-188 Report - Balance Metrics

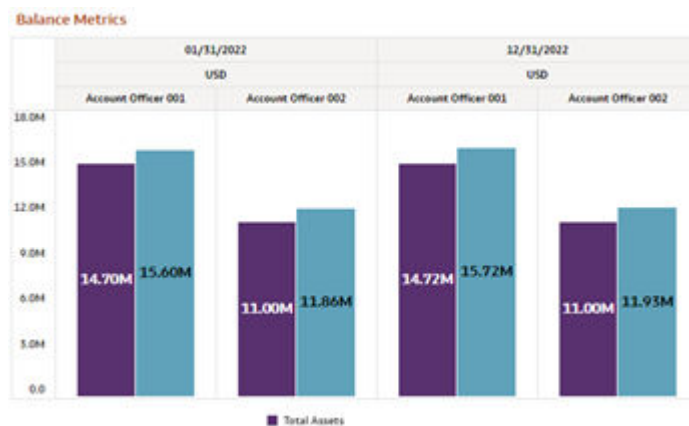

Inter-Segment Movement


In this canvas, comparative analysis is done of account and balance movement with respect to the previous time period (for all defined segments and segment types as detailed by customer profile).

Figure 10-189 Inter-Segment Movement Canvas

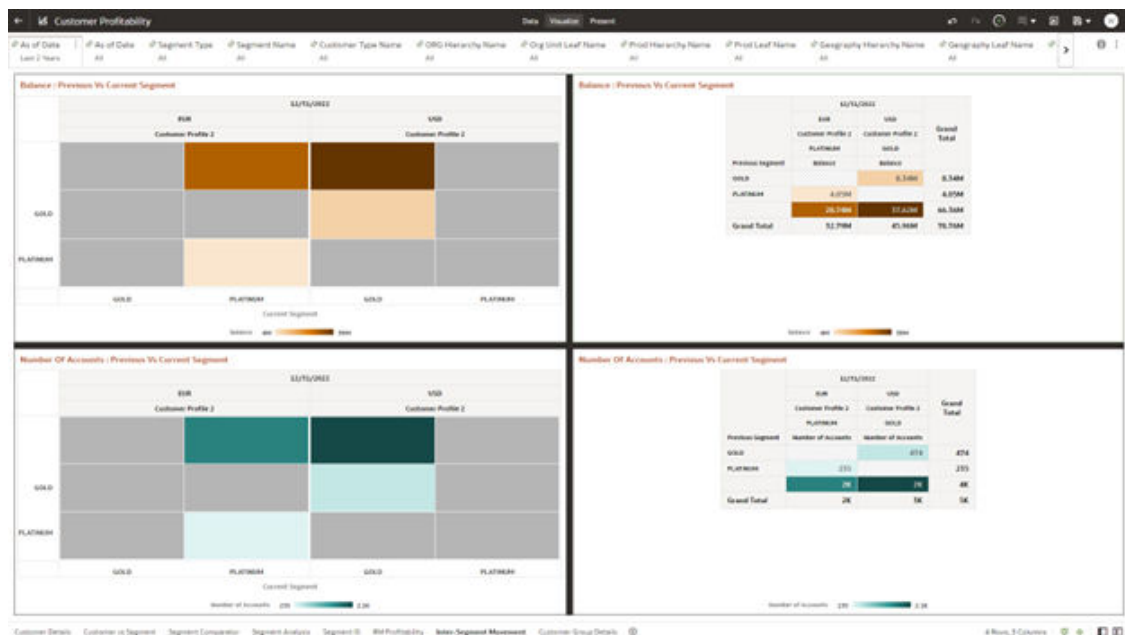

Report – Balance: Previous Vs Current Segment: The following report shows the following the Heat Map of Balance movement at the level of the segment and currency.

Figure 10-190 Report – Balance: Previous Vs Current Segment

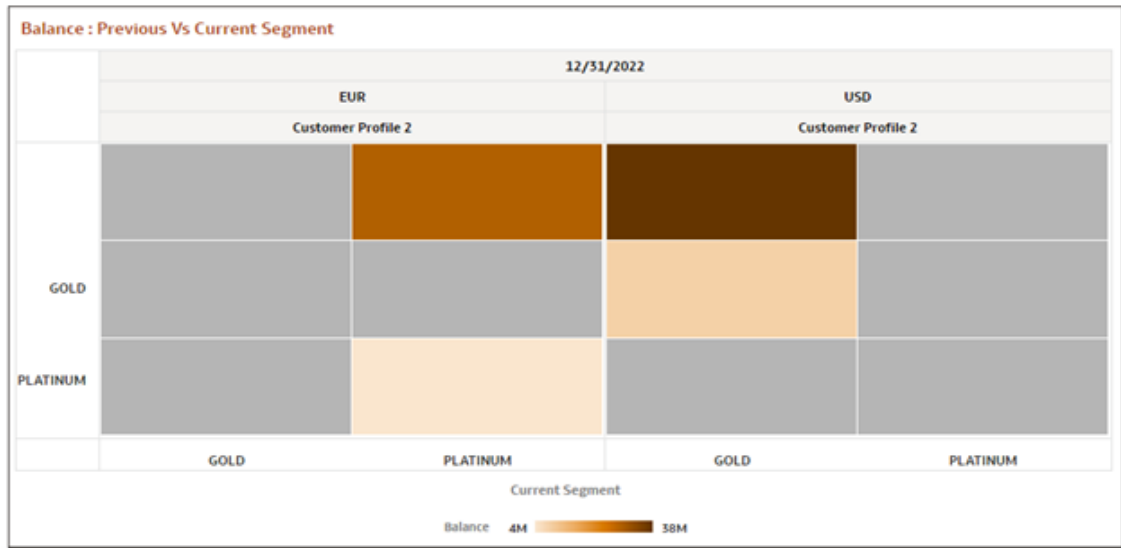


Balance: Previous Vs Current Segment: The report shows the same information as above by Segment dimension showing amount details.


Figure 10-191 Report – Balance: Previous Vs Current Segment



Report – Number of Accounts: Previous Vs Current Segment - The following report shows the following the Heat Map of movement of the number of accounts at the level of the segment and currency.

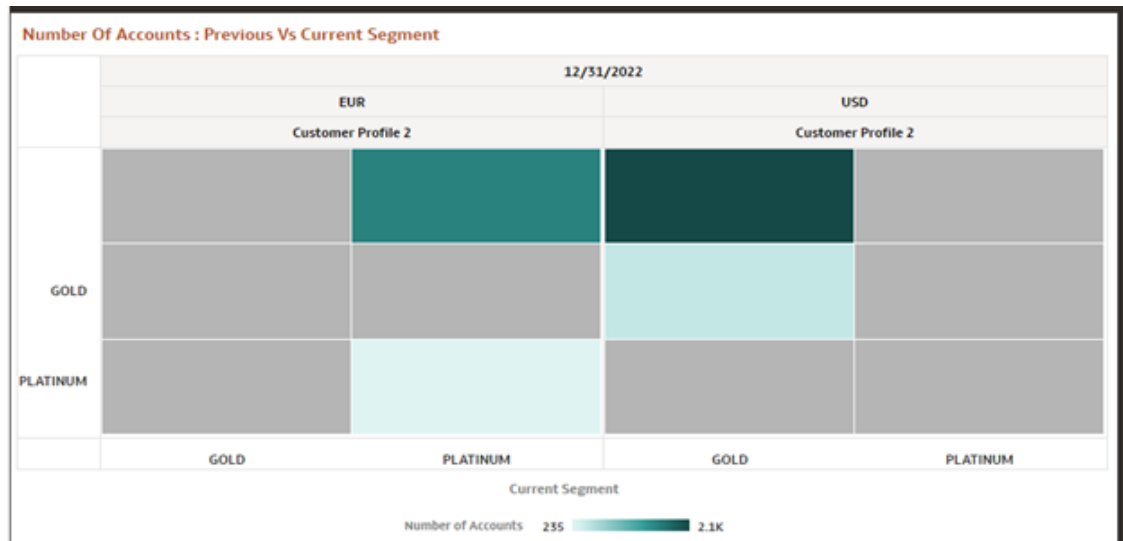Figure 10-192 Report – Number of Accounts: Previous vs Current Segment

Report – Number of Accounts: Previous Vs Current Segment - This report shows the same information as above by showing detailed number of accounts.

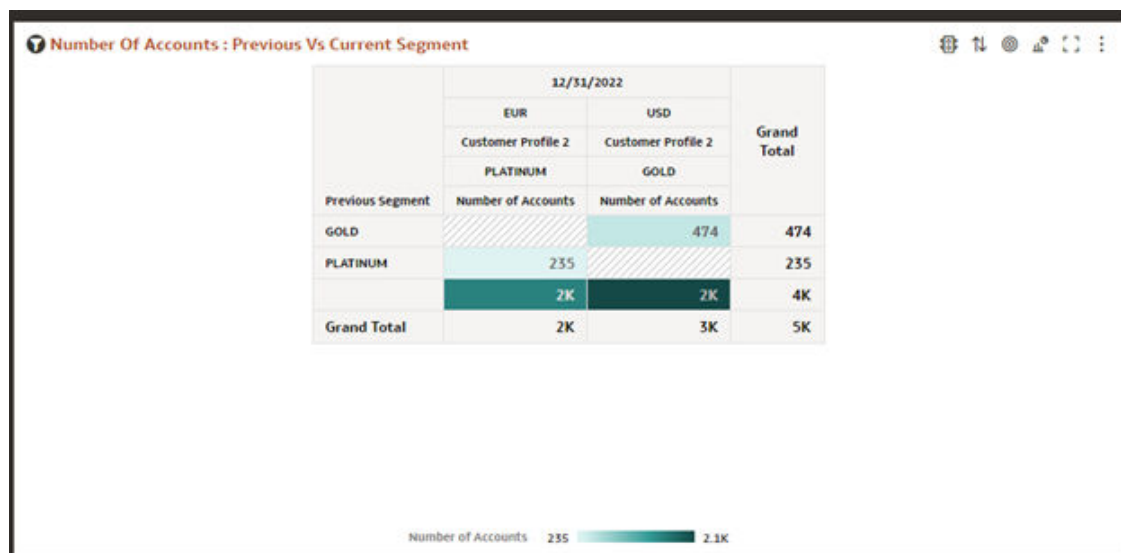Figure 10-193 Report – Number of Accounts: Previous vs Current Segment

Customer Group Details

This canvas depicts the detailed Income Statement and profitability information of a hierarchical Customer structure at the group level.

Figure 10-194 Customer Group Details Canvas

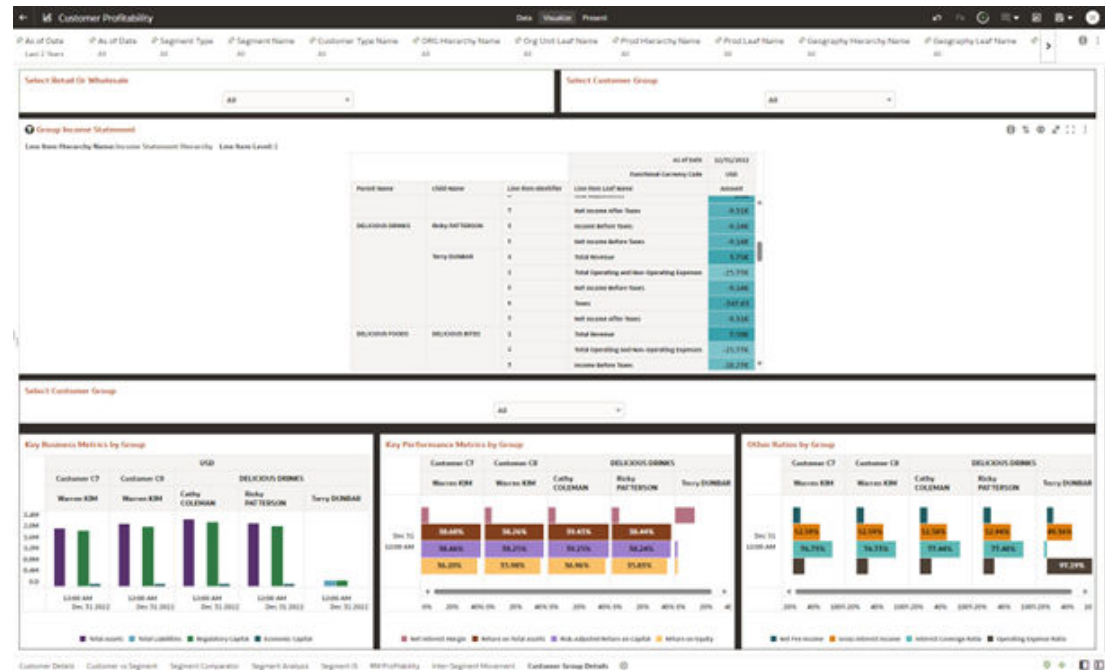


Figure 10-195 Filter Retail or Wholesale

Select Retail Or Wholesale

All

Search

Retail


Selection

☐ Null

Click to add selections from the left

Select A Value

Figure 10-196 Filter Customer Group

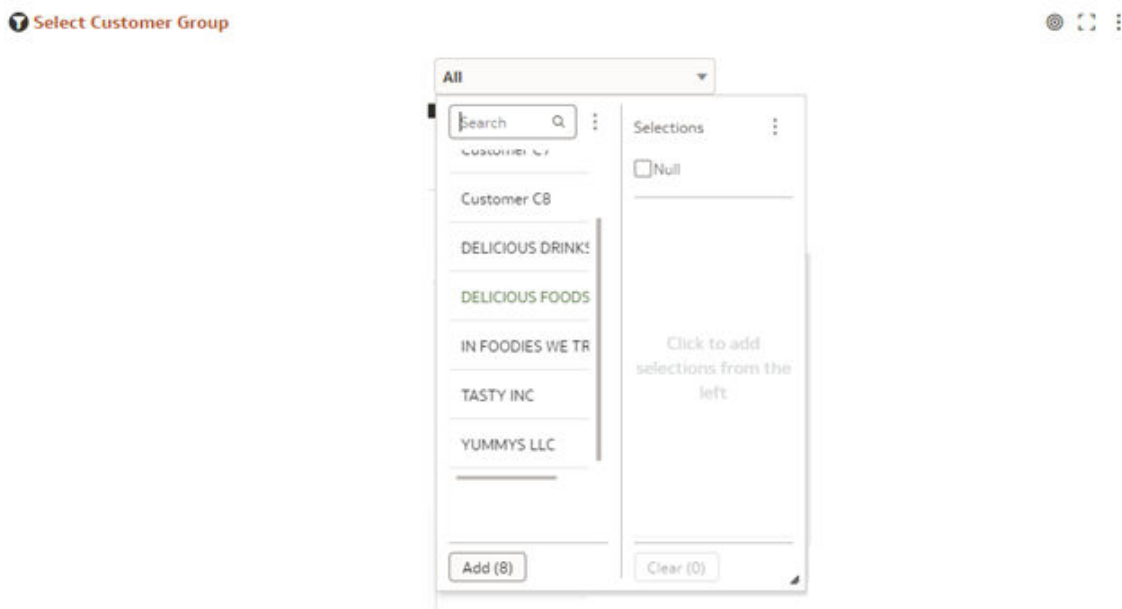

Report – Group Income Statements: The report shows the detailed income statement of the selected customer at a group level, including those of the child customers.

Figure 10-197 Group Income Statement Canvas

The screenshot shows the 'Group Income Statements' report canvas. The report displays a detailed income statement for the selected customer group, including child customers. The table has columns for Period Name, Line Item Name, Line Item Identifier, Line Item Unit Name, Functional Currency Code, and Amount. The data is presented in a hierarchical structure, with 'DELICIOUS DRINKS' as a major category.

Period Name	Line Item Name	Line Item Identifier	Line Item Unit Name	Functional Currency Code	Amount
		4	Wish Adjustments	USD	5,000
		5	Net Income Before Taxes	USD	20,279
		6	Taxes	USD	547,851
		7	Net Income After Taxes	USD	20,279
	DELICIOUS DRINKS	8	Total Revenue	USD	54,500
		9	Total Operating and Non-Operating Expenses	USD	34,221
		10	Income Before Taxes	USD	20,279
		11	Wish Adjustments	USD	5,000
		12	Net Income Before Taxes	USD	20,279
		13	Taxes	USD	547,851
		14	Net Income After Taxes	USD	20,279

Report – Key Business Metrics: The report shows the Key Business Metrics for the selected customer group including the child customers.

Figure 10-198 Key Business Metrics by Group Canvas


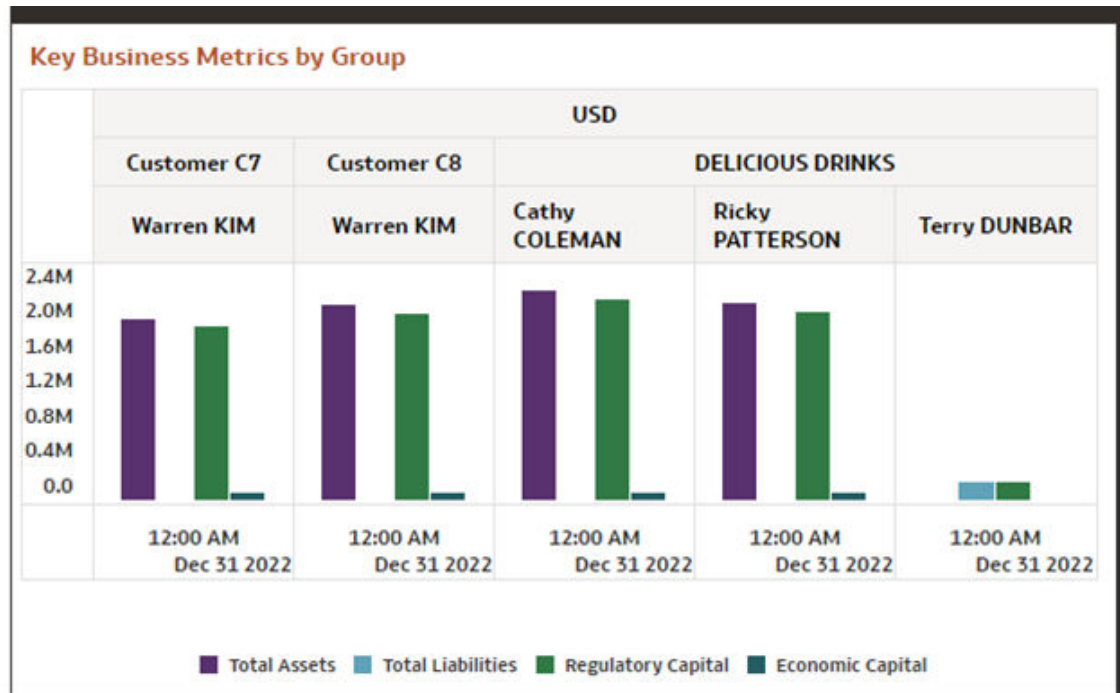


Figure 10-199 Key Business Metrics by Group Canvas

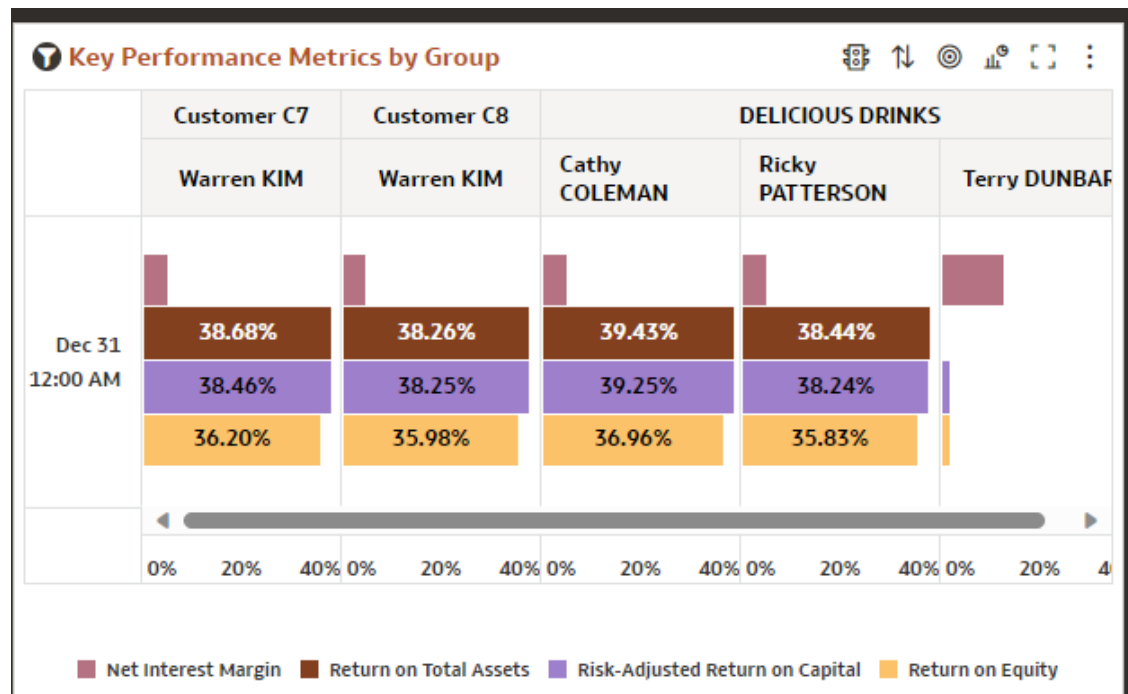


Report – Other Ratios: The report shows the following ratios for the selected customer group including the child customers, expressed as percentage.

- Net Fee Income

- Gross Interest Income
- Interest Coverage Ratio
- Operating Expense Ratio

Figure 10-200 Other Ratios by Group Canvas

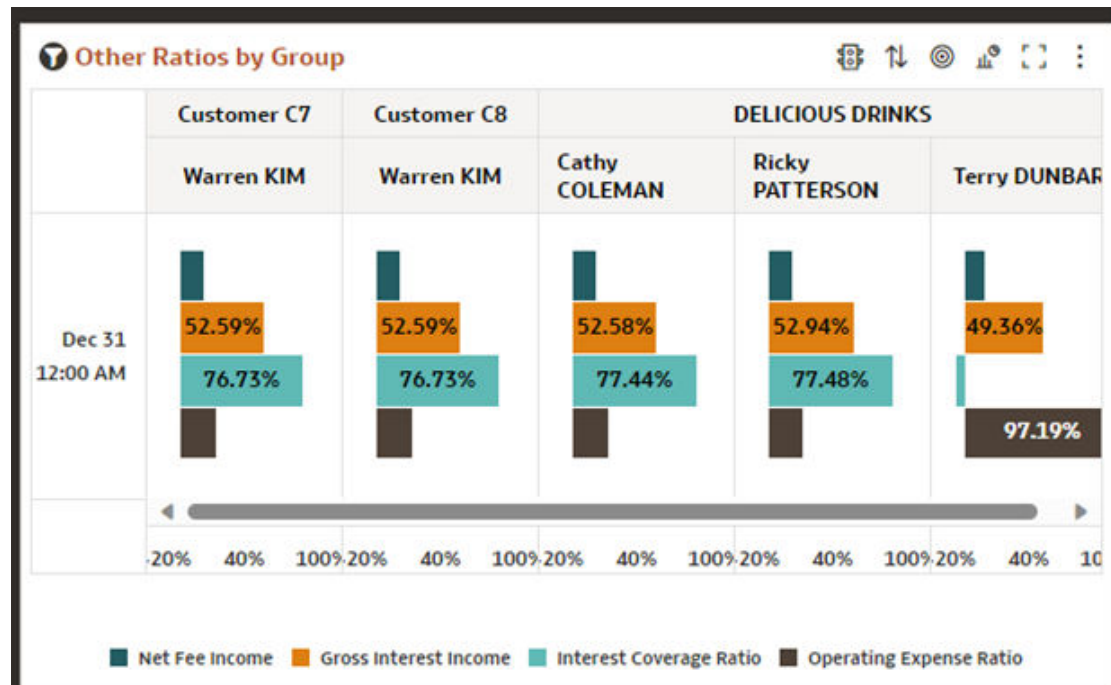

Geography Profitability

When you select the Geographic location and map it to the key dimensions of Profitability Analytics, the Profitability Insights Geography Profitability report which displays all the summary measures of profitability, KPI's and Business metrics. These are revenue, end of period balance, total assets, total liabilities, regulatory capital, economic capital, net interest margin, return on total assets, risk-adjusted return on capital, return on equity, net fee income, gross interest income, interest coverage ratio and operating expense ratio.

To feed the Geography Profitability Report, refer to the *Oracle Financial Services Profitability Analytics Cloud Service Dataflow* document available at [Doc ID: 2869409.1](#).

For the Geography Profitability Report refer to the following Data Flow sub-sections:


- PACS - Instrument Summary
- PACS - Instrument Geography

Overall Layout of Geography Canvas

All reports in the Geography Canvas have two layers: one for the city and another for the country. The color gradation is self explanatory and varies as per the value of the metric or measure depicted. Because of the presence of two layers, the overall map is colored as the average value of the measure. This color can be disabled by clicking on the polygon corresponding to the overall map.

The Summary canvas in Geography Profitability provides a map based depiction of profitability measures as follows:

Figure 10-201 Geography Profitability Summary

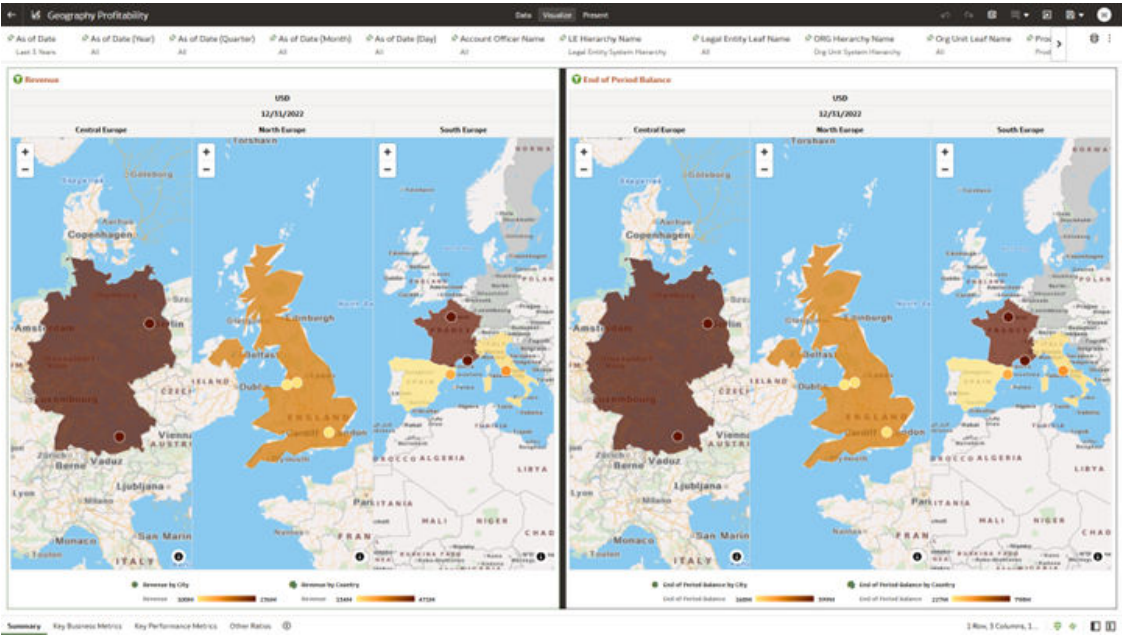

Report Common Filters

You can use a series of canvas level pinned Prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-202 Canvas Prompt Filters for Time Dimension

As Of Date	As Of Date (Year)	As Of Date (Quarter)	As Of Date (Month)	As Of Date (Day)
Last 3 Quarters	All	All	All	Full Range

As of Date: You can use this filter to isolate a selected timeframe for the analysis. The following screenshot displays this filter’s possible options against the Time Dimension.

Figure 10-203 Filter Date

As of Date
Last 3 Years

Relative Time

Type Last

Increment 3

Time Level Years

Relative To

- ☒ Years
- Quarters
- Months
- Weeks
- Days

Additional Filters for the Time Dimension are as follows:

- As of Date
- As of Date (Year)
- As of Date (Quarter)
- As of Date (Month)
- As of Date (Day)

Figure 10-204 Key Processing Dimensions Prompt Filters

Account Officer Name	LE Hierarchy Name	Legal Entity Leaf Name	ORG Hierarchy Name	Org Unit Leaf Name	Prod Hierarchy Name	Prod Leaf Name
All	Legal Entity System Hierarchy	All	Org Unit System Hierarchy	All	Products System Hierarchy	All

Figure 10-205 Key Processing Dimensions Prompt Filters

Geography Hierarchy Name	Geography Leaf Name	Customer Type Name	Branch Leaf Name	Industry Leaf Name	Channel Name
Geographic Location System Hierarchy	All	All	All	All	All

- **Account Officer Name:** You can use this filter to select the Account Officer or Account Manager for the underlying Instrument Tables Accounts.
- **LE Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Legal Entity Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same

time, a mandatory driver to select "LE Hierarchy Name" must be selected with only a single value simultaneously.

- **Legal Entity Leaf Name:** You can use this filter to select the Legal Entity Leaf Name that is related to the underlying Management Ledger data.
- **Org Unit Hierarchy Name:** This is a mandatory filter for the group filtering on Org Unit Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select "Org Unit Hierarchy Name" must be selected with only a single value simultaneously.
- **Org Unit Leaf Name:** You can use this filter to select the Org Unit Leaf Name corresponding to the hierarchy.
- **Prod Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Product Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select "Prod Hierarchy Name" must be selected with only a single value simultaneously.
- **Prod Leaf Name:** You can use this filter to select the Product Leaf Name corresponding to the hierarchy.
- **Geography Hierarchy Name:** This is a mandatory filter for the group filtering on the Geography Hierarchy.
As the application supports the creation of multiple hierarchies for the same dimension of analysis, to avoid displaying results from multiple hierarchies at the same time, a mandatory driver to select "Geography Hierarchy Name" must be selected.
- **Geography Leaf Name:** You can use this filter to select a specific Geography value at leaf level related to the underlying instrument tables accounts.
- **Customer Type:** You can use this filter to select the Customer Type for the underlying Instrument Tables Accounts.
- **Branch Leaf Name:** You can use this filter to select the Branch Leaf Name that is related to the underlying Branch.
- **Industry Leaf Name:** You can use this filter to select the Industry Leaf Name that is related to the underlying Industry.
- **Channel Name:** You can use this filter to select the Channel Name for the underlying channels.

Summary Tab

Figure 10-206 Revenue


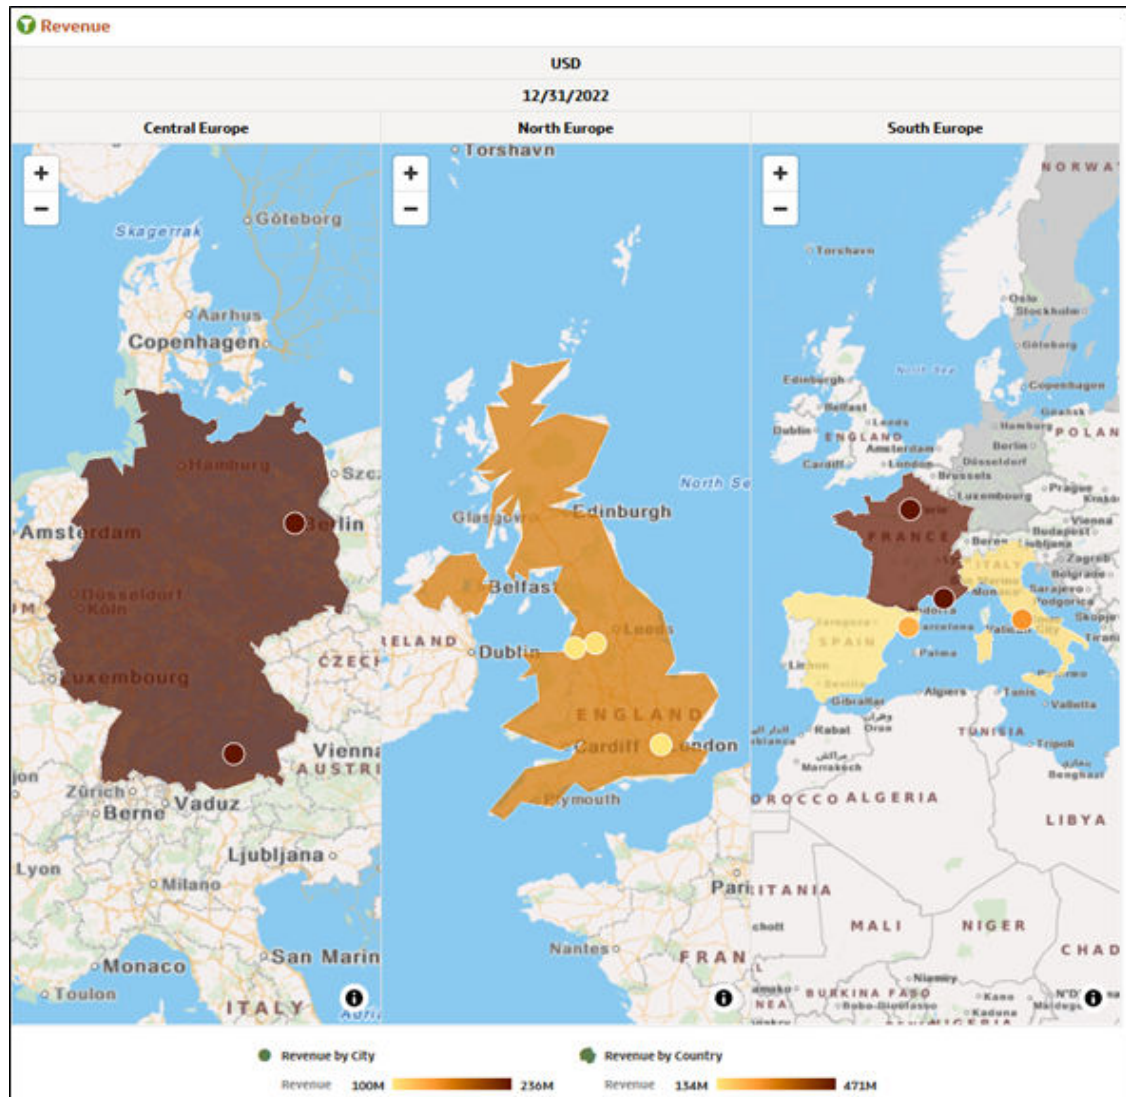


Figure 10-207 End of Period Balance

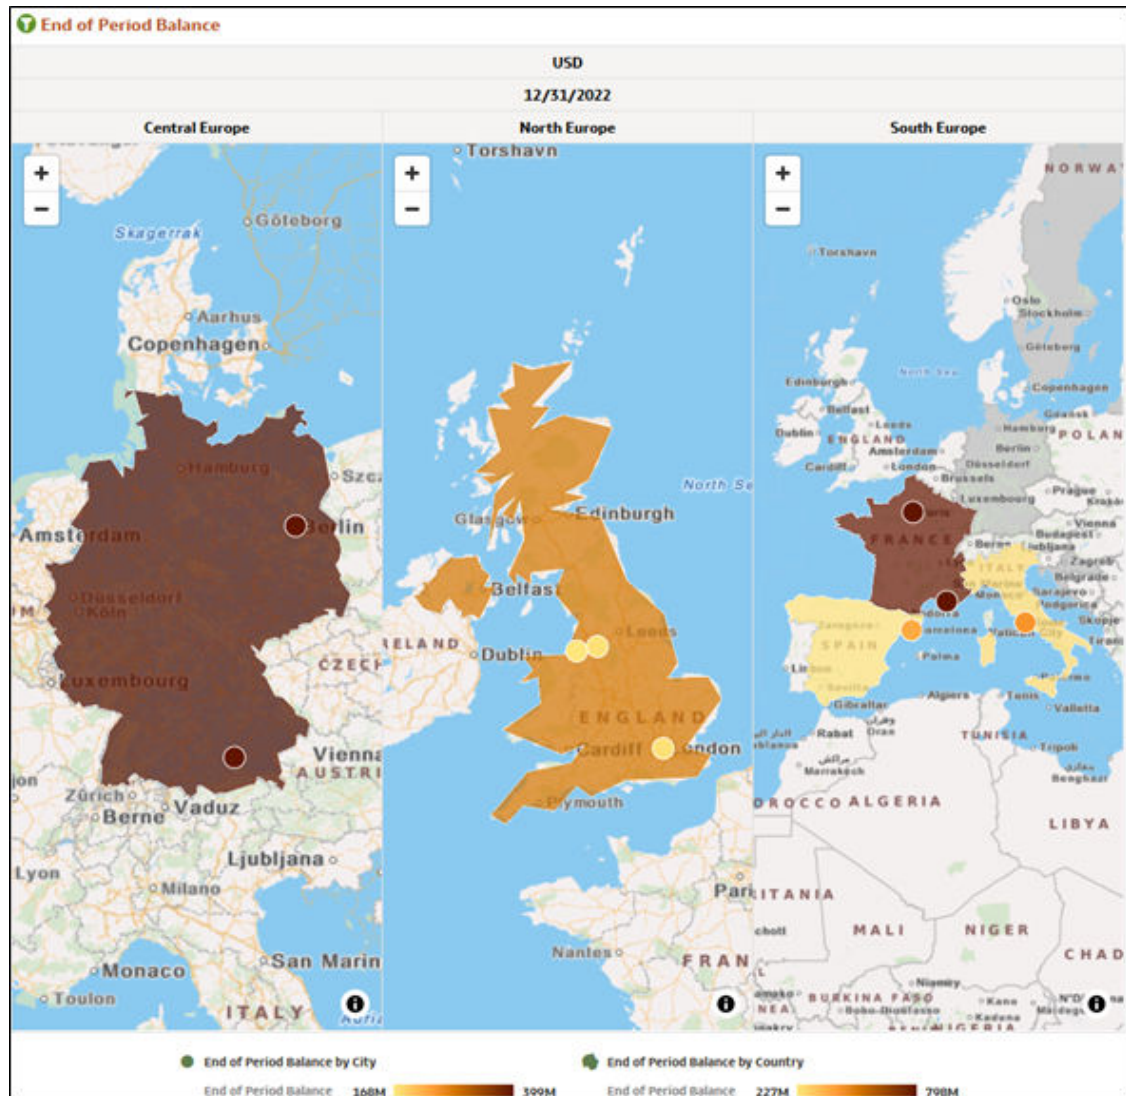

Key Business Metrics Tab

The Key Business Metrics canvas within Geography Profitability provides a map based depiction of profitability measures as follows:

Total Assets

USD
12/31/2022

Central Europe

North Europe

South Europe

Legend: ● Total Assets by City, ● Total Assets by Country

Color Scale: 76M (Green) to 181M (Dark Purple) for Cities; 96M (Green) to 361M (Dark Purple) for Countries.

Total Liabilities

USD
12/31/2022

Central Europe

North Europe

South Europe

Total Liabilities by City

Total Liabilities 92M 218M

Total Liabilities by Country

Total Liabilities 131M 436M

Figure 10-210 Regulatory Capital


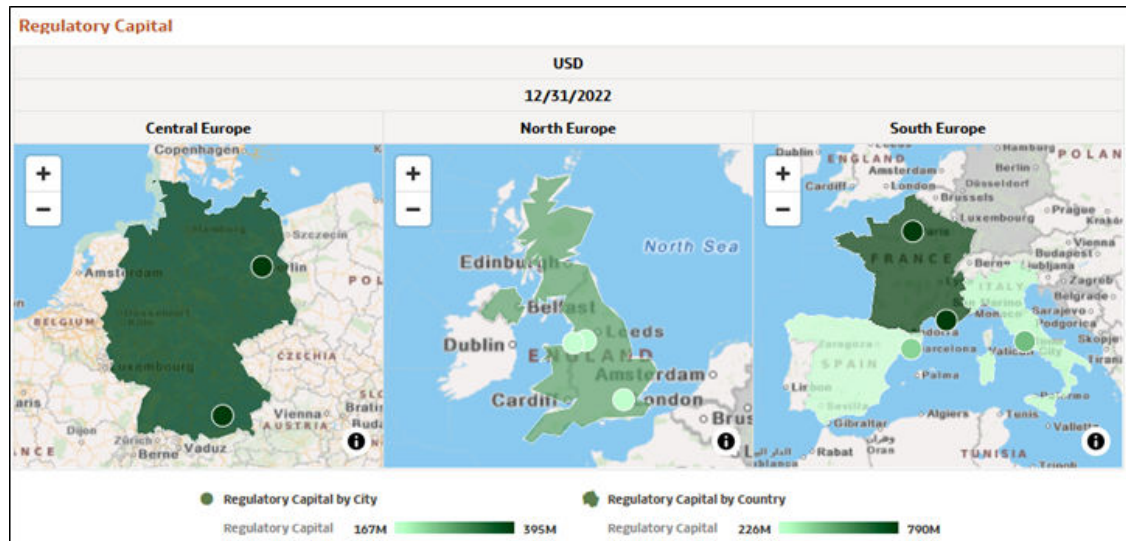


Figure 10-211 Economic Capital

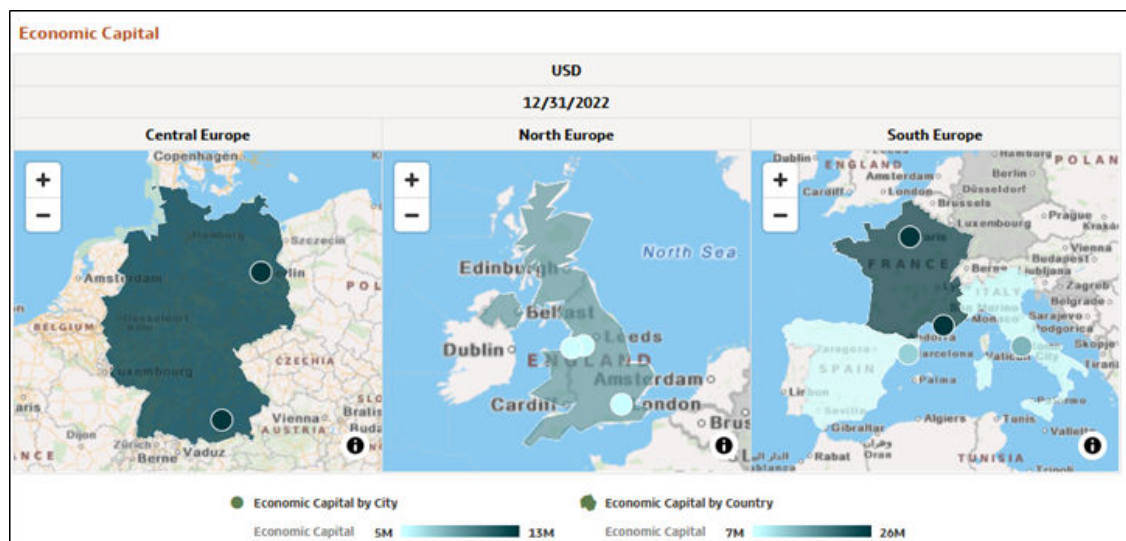

Key Performance Metrics Tab

The Key Performance Metrics canvas within Geography Profitability provides a map based depiction of profitability measures as follows:

Net Interest Margin

12/31/2022

The figure consists of three maps of Europe, each showing the Net Interest Margin (NIM) for various cities and countries as of 12/31/2022. The maps are categorized into Central Europe, North Europe, and South Europe. A legend at the bottom indicates that the NIM ranges from 5.781% (lightest shade) to 6.077% (darkest shade). The maps show that NIM is generally higher in Central Europe (e.g., Germany, France, Austria) and lower in North Europe (e.g., Ireland, Scotland, Wales). South Europe shows a mix of NIM levels, with Spain and Italy generally having lower NIMs than Central Europe.

Central Europe

North Europe

South Europe

Legend: Net Interest Margin by City (5.781% to 6.077%)

Return on Total Assets

12/31/2022

Central Europe
North Europe
South Europe

Return on Total Assets by City
Return on Total Assets by Country

Return on Total Assets 42.418% 42.614%
Return on Total Assets 42.4183% 42.5861%

Figure 10-214 Risk-Adjusted Return on Capital


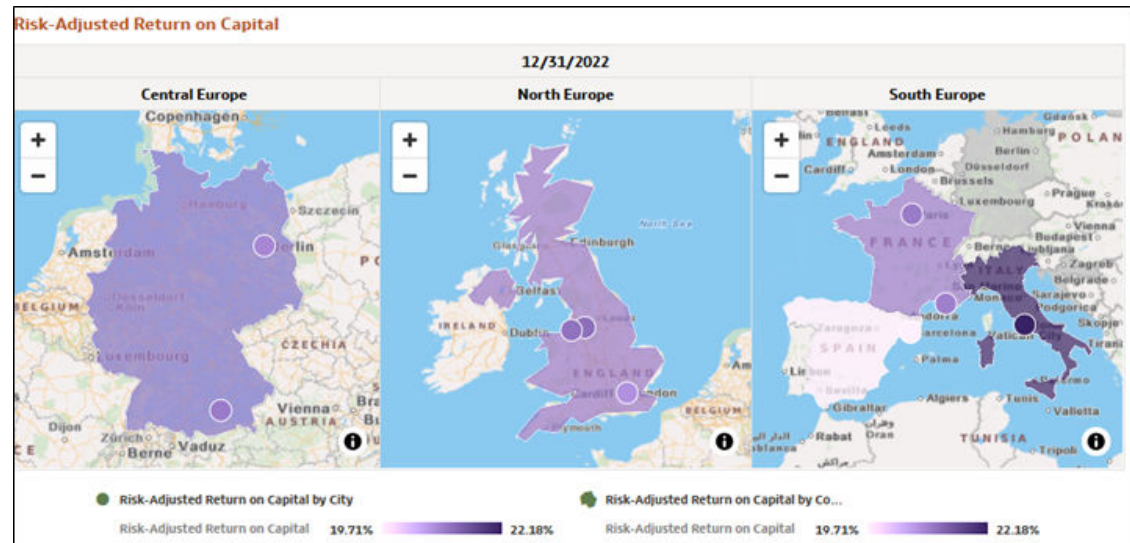


Figure 10-215 Return on Equity

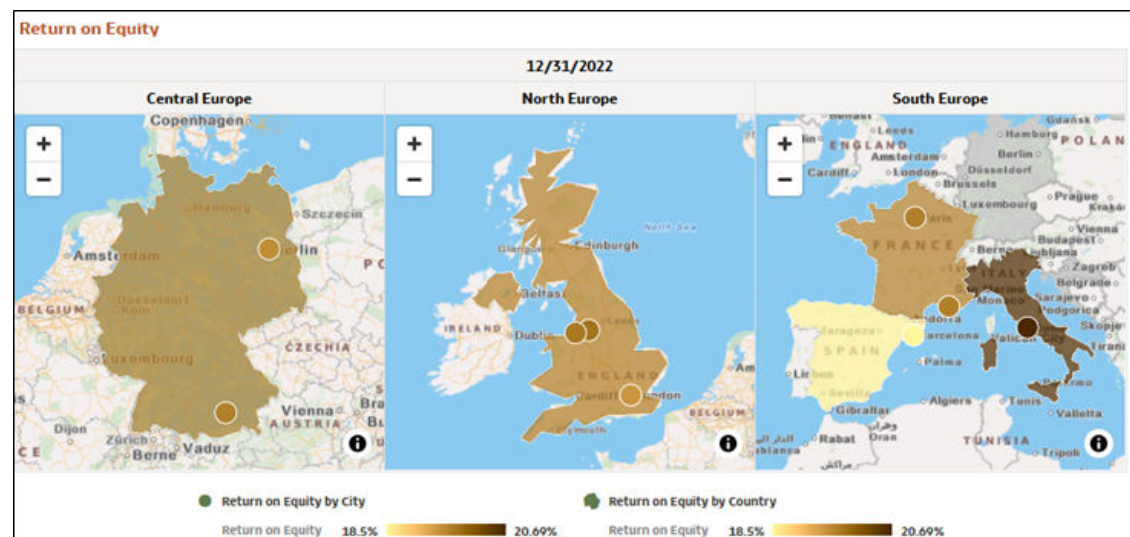

Other Ratios

The Other Ratio's canvas within Geography Profitability provides a map based depiction of profitability measures as follows:

Figure 10-216 Net Fee Income

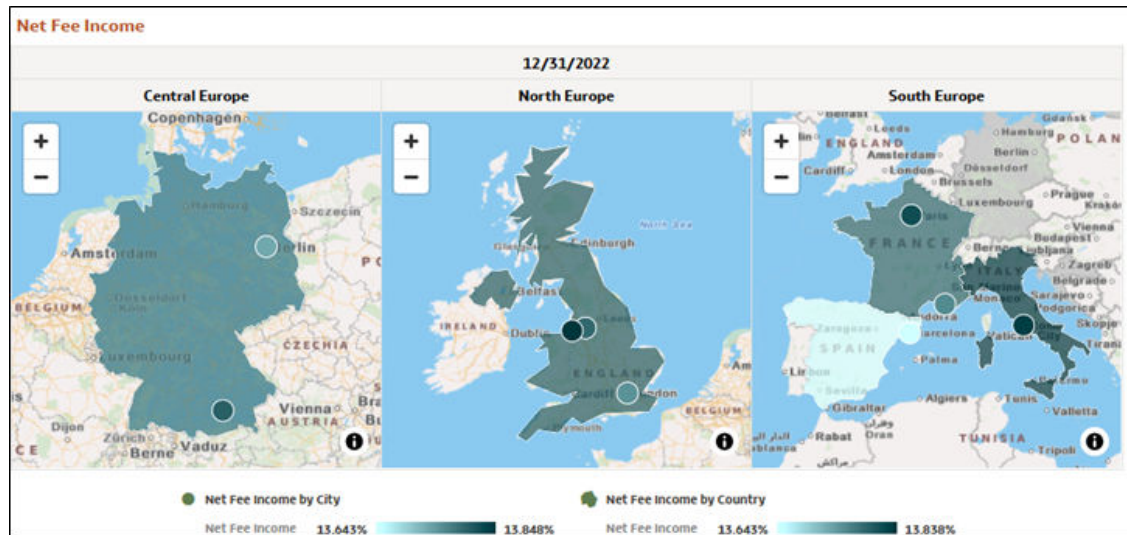


Figure 10-217 Gross Interest Income

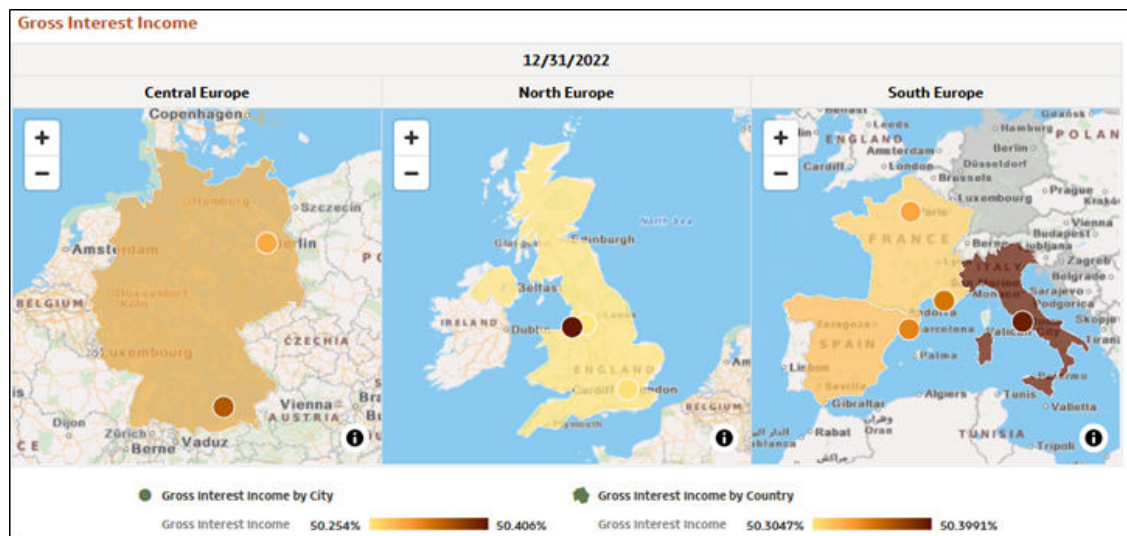


Figure 10-218 Interest Coverage Ratio


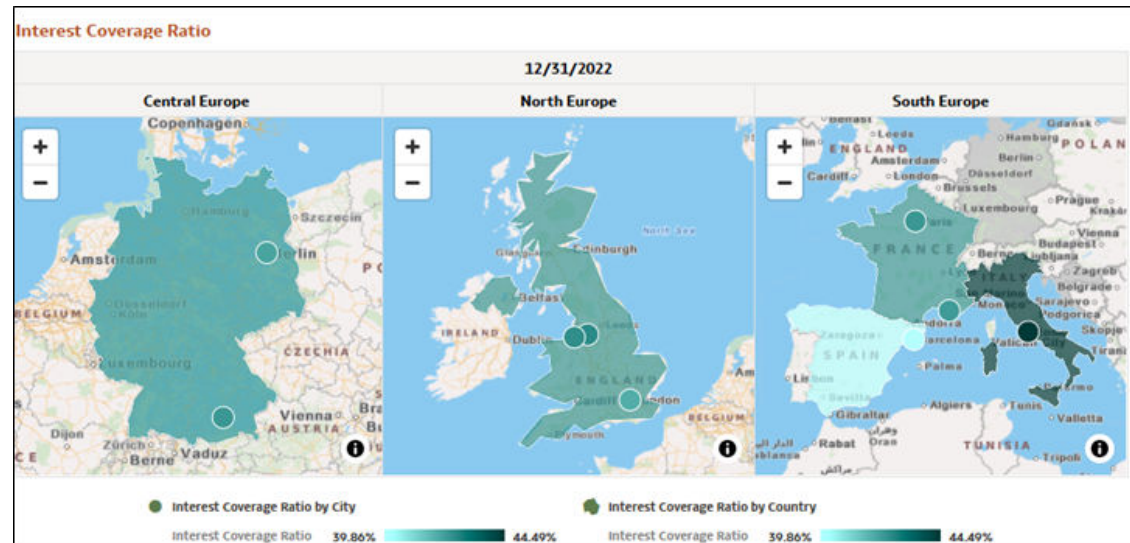


Figure 10-219 Operating Expense Ratio

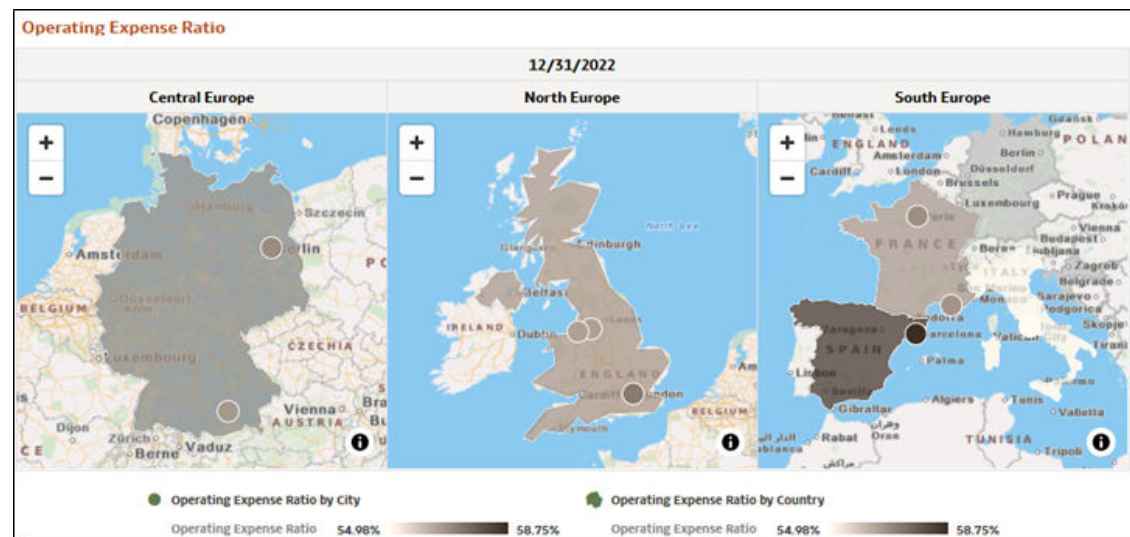


Instrument Custom Metrics

To access the Instrument Custom Metrics report, select **Analytics** from the LHS Menu, and then select **Instrument Custom Metrics**.

To feed the Custom Metrics to the below sub sections, refer to the *Oracle Financial Services Profitability Analytics Cloud Service Dataflow* document available at [Doc ID: 2869409.1](https://docs.oracle.com/en/cloud/financial-services/profitability-analytics-cloud-service/dataflow/):

Figure 10-220 Custom Metrics Canvas

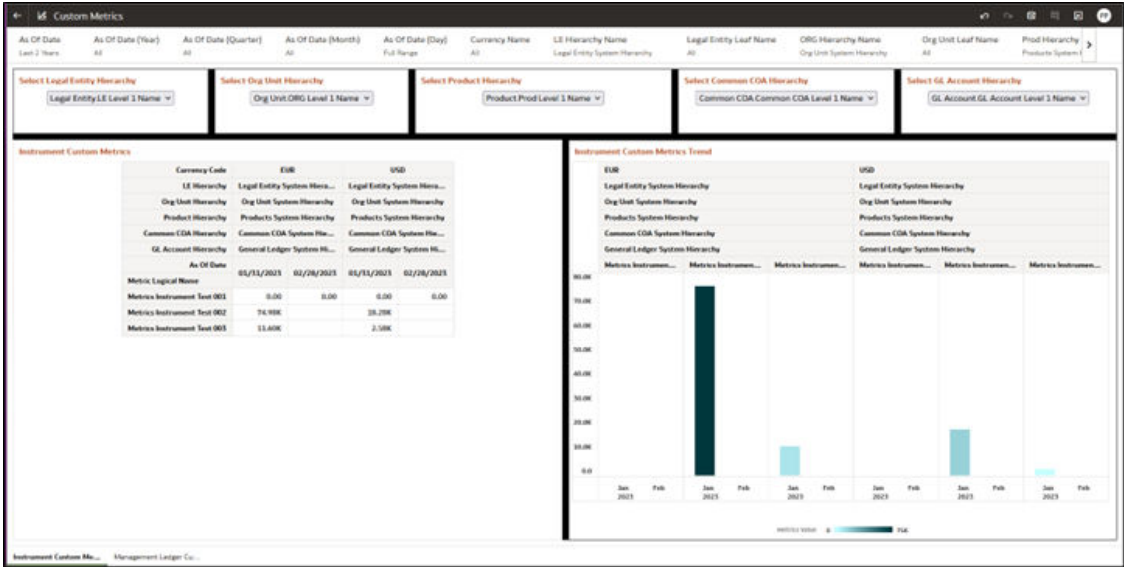

Report Filters

You can use a series of canvas level pinned Prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-221 Canvas Prompt Filters for Time Dimension



As of Date: You can use this filter to isolate a selected time frame for the analysis. The following screen shot displays the possible options that this filter provides against the Time Dimension.

Figure 10-222 Filter Date

As of Date
Last 3 Years

Relative Time

Type Last

Increment 3

Time Level Years

Relative To

- ☒ Years
- Quarters
- Months
- Weeks
- Days

Additional Filters for the Time Dimension are as follows:

- As of Date
- As of Date (Year)
- As of Date (Quarter)
- As of Date (Month)
- As of Date (Day)

Figure 10-223 Key Processing Dimensions Prompt Filters

LE Hierarchy Name	Legal Entity Leaf Name	ORG Hierarchy Name	Org Unit Leaf Name	Prod Hierarchy Name	Prod Leaf Name
Legal Entity System Hierarchy	All	Org Unit System Hierarchy	All	Products System Hierarchy	All

Figure 10-224 Key Processing Dimensions Prompt Filters

Common COA Hierarchy Name	Common COA Leaf Name	GL Account Hierarchy Name	GL Account Leaf Name
Common COA System Hierarchy	All	General Ledger System Hierarchy	All

- **Legal Entity Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Legal Entity Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select "LE Hierarchy Name" must be selected with only a single value simultaneously.

- **Legal Entity Leaf Name:** You can use this filter to select the Legal Entity Leaf Name that is related to the underlying Management Ledger data.
- **Org Unit Hierarchy Name:** This is a mandatory filter for the group filtering on Org Unit Key Processing Dimension. As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “Org Unit Hierarchy Name” must be selected with only a single value simultaneously.
- **Org Unit Leaf Name:** You can use this filter to select the Org Unit Leaf Name corresponding to the hierarchy.
- **Product Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Product Key Processing Dimension. As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “Prod Hierarchy Name” must be selected with only a single value simultaneously.
- **Product Leaf Name:** You can use this filter to select the Product Leaf Name corresponding to the hierarchy.
- **Currency Code:** You can use this filter to select a specific Currency Code to be applied to the underlying management ledger data.
- **Scenario Name**

In canvas Variable Prompts

Figure 10-225 In-canvas Prompt Filters - Instrument



- **Select Legal Entity Hierarchy:** You can use this filter to select the LE Level Name pertaining to the LE Hierarchy level, for rolling up the results on the underlying Legal Entity Leaves that are part of the selected hierarchy.
- **Select Org Unit Hierarchy:** You can use this filter to select the Org Unit Level Name pertaining to the Org Unit Hierarchy level, for rolling up the results on the underlying Org Unit Leaves that are part of the selected hierarchy.
- **Select Product Hierarchy:** You can use this filter to select the Product Level Name pertaining to the Product Hierarchy level, for rolling up the results on the underlying Product Leaves that are part of the selected hierarchy.
- **Select Common COA Hierarchy:**
- **Select GL Account Hierarchy:**
- **Figure 10-226 In-canvas Prompt Filters - Instrument**




Select Time Level:

- **Select Legal Entity Hierarchy:** You can use this filter to select the LE Level Name pertaining to the LE Hierarchy level, for rolling up the results on the underlying Legal Entity Leaves that are part of the selected hierarchy.
- **Select Org Unit Hierarchy:** You can use this filter to select the Org Unit Level Name pertaining to the Org Unit Hierarchy level, for rolling up the results on the underlying Org Unit Leaves that are part of the selected hierarchy.
- **Select Product Hierarchy:** You can use this filter to select the Product Level Name pertaining to the Product Hierarchy level, for rolling up the results on the underlying Product Leaves that are part of the selected hierarchy.

Instrument Custom Metrics Canvas

Figure 10-227 Canvas Instrument Custom Detail

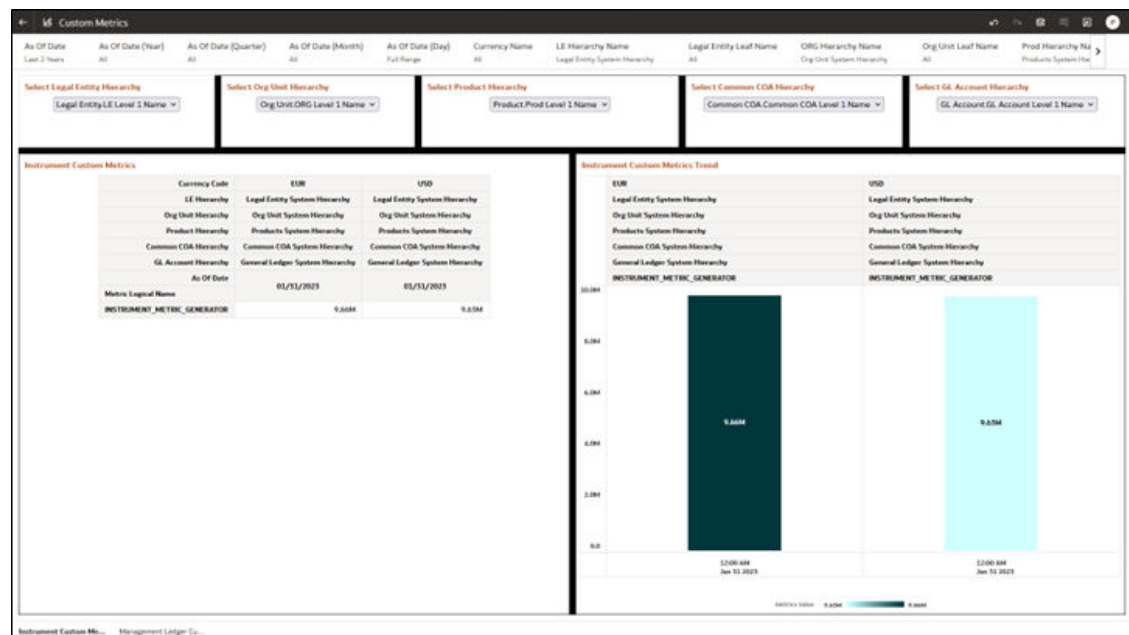


This report shows details of the Metric Logical Name across the dimensions by currency code in the period selected.

Figure 10-228 Instrument Custom Metrics Analysis

Instrument Custom Metrics		
Currency Code	EUR	USD
LE Hierarchy	Legal Entity System Hierarchy	Legal Entity System Hierarchy
Org Unit Hierarchy	Org Unit System Hierarchy	Org Unit System Hierarchy
Product Hierarchy	Products System Hierarchy	Products System Hierarchy
Common COA Hierarchy	Common COA System Hierarchy	Common COA System Hierarchy
GL Account Hierarchy	General Ledger System Hierarchy	General Ledger System Hierarchy
	01/31/2023	01/31/2023
Metric Logical Name		
INSTRUMENT_METRIC_GENERATOR	9.66M	9.63M

This report shows details of Instrument Custom Metrics Trend across the dimensions by currency code in the period selected.

Figure 10-229 Canvas Instrument Custom Metrics Trend

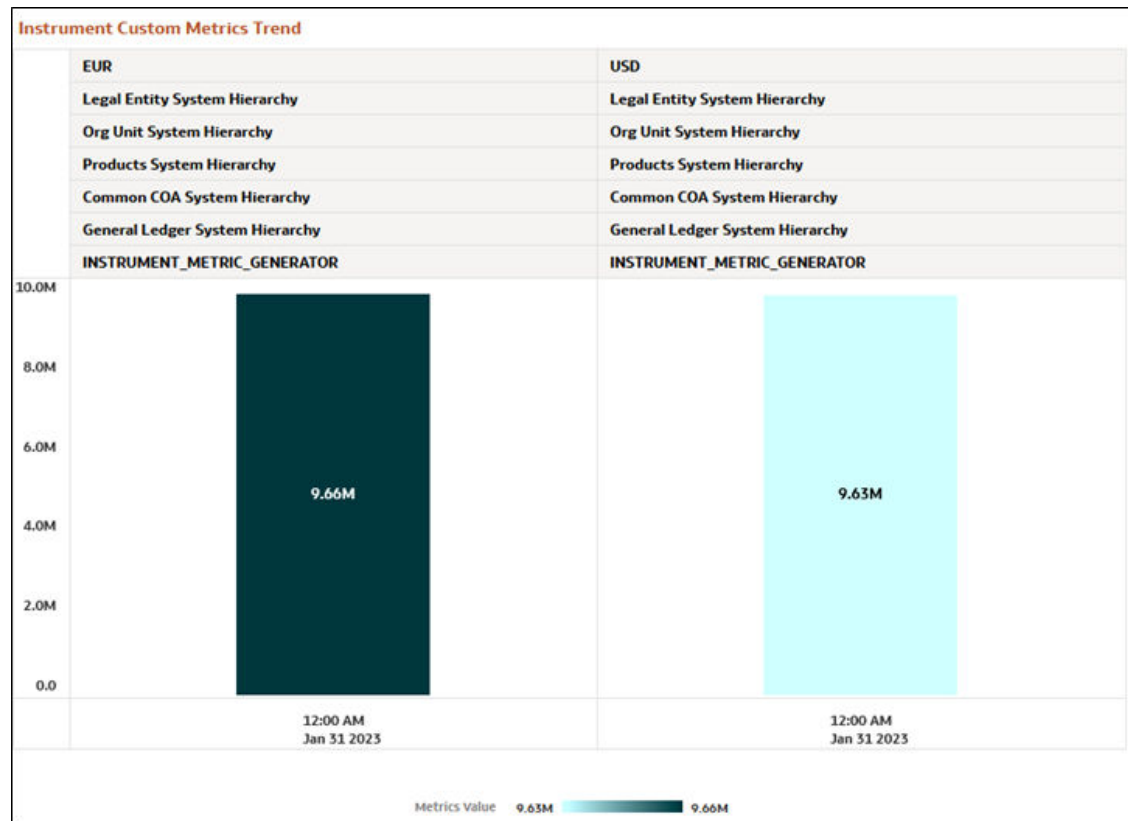

Management Ledger Custom Metrics

To access the Management Ledger Custom Metrics report, select **Analytics** from the LHS Menu, and then select **Management Ledger Custom Metrics**.

To feed the Custom Metrics to the below sub sections, refer to the *Oracle Financial Services Profitability Analytics Cloud Service Dataflow* document available at [Doc ID: 2869409.1](#):

Report Filters

You can use a series of canvas level pinned Prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-230 Canvas Prompt Filters for Time Dimension

As Of Date	As Of Date (Year)	As Of Date (Quarter)	As Of Date (Month)	As Of Date (Day)
Last 3 Quarters	All	All	All	Full Range

As of Date: You can use this filter to isolate a selected time frame for the analysis. The following screen shot displays the possible options that this filter provides against the Time Dimension.

Figure 10-231 Filter Date

Additional Filters for the Time Dimension are as follows:

- As of Date
- As of Date (Year)
- As of Date (Quarter)
- As of Date (Month)
- As of Date (Day)

Figure 10-232 Key Processing Dimensions Prompt Filters

LE Hierarchy Name	Legal Entity Leaf Name	ORG Hierarchy Name	Org Unit Leaf Name	Prod Hierarchy Name	Prod Leaf Name
Legal Entity System Hierarchy	All	Org Unit System Hierarchy	All	Products System Hierarchy	All

Figure 10-233 Key Processing Dimensions Prompt Filters

Common COA Hierarchy Name	Common COA Leaf Name	GL Account Hierarchy Name	GL Account Leaf Name
Common COA System Hierarchy	All	General Ledger System Hierarchy	All

- **Legal Entity Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Legal Entity Key Processing Dimension.

As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “LE Hierarchy Name” must be selected with only a single value simultaneously.

- **Legal Entity Leaf Name:** You can use this filter to select the Legal Entity Leaf Name that is related to the underlying Management Ledger data.
- **Org Unit Hierarchy Name:** This is a mandatory filter for the group filtering on Org Unit Key Processing Dimension. As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “Org Unit Hierarchy Name” must be selected with only a single value simultaneously.
- **Org Unit Leaf Name:** You can use this filter to select the Org Unit Leaf Name corresponding to the hierarchy.
- **Product Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Product Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select “Prod Hierarchy Name” must be selected with only a single value simultaneously.
- **Product Leaf Name:** You can use this filter to select the Product Leaf Name corresponding to the hierarchy.
- **Currency Code:** You can use this filter to select a specific Currency Code to be applied to the underlying management ledger data.
- **Scenario Name**

In canvas Variable Prompts

Figure 10-234 In-canvas Prompt Filters - Instrument

Select Legal Entity Hierarchy Legal Entity LE Level 1 Name ▾	Select Org Unit Hierarchy Org Unit ORG Level 1 Name ▾	Select Product Hierarchy Product Prod Level 1 Name ▾	Select Common COA Hierarchy Common COA Common COA Level 1 Name ▾	Select GL Account Hierarchy GL Account GL Account Level 1 Name ▾

- **Select Legal Entity Hierarchy:** You can use this filter to select the LE Level Name pertaining to the LE Hierarchy level, for rolling up the results on the underlying Legal Entity Leaves that are part of the selected hierarchy.
- **Select Org Unit Hierarchy:** You can use this filter to select the Org Unit Level Name pertaining to the Org Unit Hierarchy level, for rolling up the results on the underlying Org Unit Leaves that are part of the selected hierarchy.
- **Select Product Hierarchy:** You can use this filter to select the Product Level Name pertaining to the Product Hierarchy level, for rolling up the results on the underlying Product Leaves that are part of the selected hierarchy.
- **Select Common COA Hierarchy:**
- **Select GL Account Hierarchy:**
- **Figure 10-235 In-canvas Prompt Filters - Instrument**

Select Time Level Time - Day Day ▾	Select Legal Entity Hierarchy Legal Entity LE Level 1 Name ▾	Select Org Unit Hierarchy Org Unit ORG Level 1 Name ▾	Select Product Hierarchy Product Prod Level 1 Name ▾

Select Time Level:

- **Select Legal Entity Hierarchy:** You can use this filter to select the LE Level Name pertaining to the LE Hierarchy level, for rolling up the results on the underlying Legal Entity Leaves that are part of the selected hierarchy.
- **Select Org Unit Hierarchy:** You can use this filter to select the Org Unit Level Name pertaining to the Org Unit Hierarchy level, for rolling up the results on the underlying Org Unit Leaves that are part of the selected hierarchy.
- **Select Product Hierarchy:** You can use this filter to select the Product Level Name pertaining to the Product Hierarchy level, for rolling up the results on the underlying Product Leaves that are part of the selected hierarchy.


Management Ledger Custom Metrics Canvas

Figure 10-236 Management Ledger Custom Metrics Analysis

Management Ledger Custom Metrics		
Currency Name	Default Currency	US Dollar
Legal Entity Hierarchy	US Entity	US Entity
Org Unit Hierarchy	ALL ORG UNIT	ALL ORG UNIT
Product Hierarchy	ALL PRODUCT	ALL PRODUCT
Time	2022-12-31	2022-12-31
Metric Logical Name		
Default Top Down Metric	11.28K	18.94K

This report shows details of Management Custom Metrics Trend across the dimensions by currency code in the period selected.

Figure 10-237 Canvas Management Custom Metrics Trend

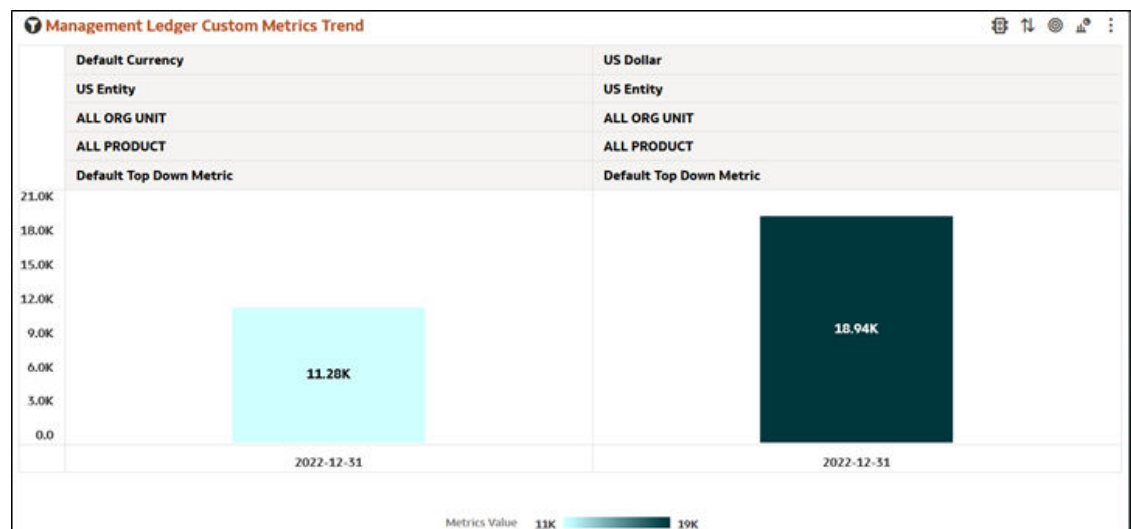


Retail Joint Accounts

To access the Retail Joint Accounts report, select **Analytics** from the LHS Menu, and then select **Retail Joint Accounts**.

Report Common Filters


You can use a series of canvas level pinned prompts to filter the data according to Functional Key Attributes as follows:

Figure 10-238 Canvas Prompt Level Filters for Management Ledger Custom Metrics



- **As of Date:** You can use this filter to isolate a selected timeframe for the analysis. The following screenshot displays this filter's possible options against the Time Dimension.

Figure 10-239 As of Date Selection

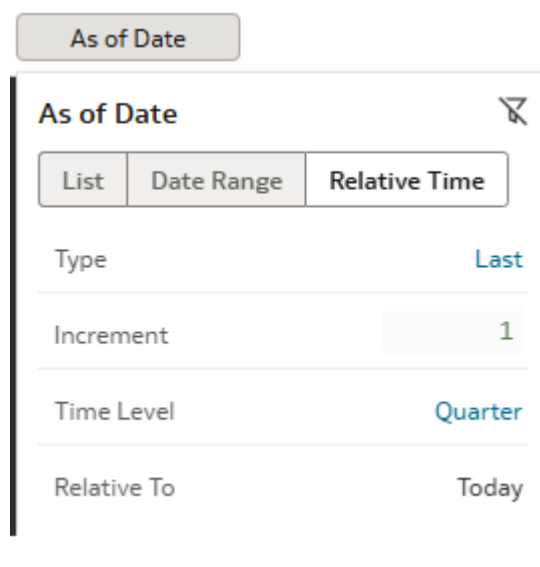

Additional Filters for the Time Dimension are as follows:

- As of Date (Year)
- As of Date (Quarter)
- As of Date (Month)
- As of Date (Day)
- **Key Processing Dimensions Prompt Filters:** You can use this filter to isolate a selected processing dimension:

- **Net Income Before Taxes:** Net income before tax is the amount of profit made by the financial institution before income tax is paid. This figure is found by subtracting total expenses from total revenue.
- **Customer Type Name:** You can use this filter to select the Customer Type for the underlying Instrument Tables Accounts.
- **LE Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Legal Entity Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select "LE Hierarchy Name" must be selected with only a single value simultaneously.
- **Legal Entity Leaf Name:** You can use this filter to select the Legal Entity Leaf Name that is related to the underlying Management Ledger data.
- **Org Hierarchy Name:** This is a mandatory filter for the group filtering on Org Unit Key Processing Dimension. As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select "Org Hierarchy Name" must be selected with only a single value simultaneously.
- **Org Unit Leaf Name:** You can use this filter to select the Org Unit Leaf Name corresponding to the hierarchy.
- **Prod Hierarchy Name:** Note that this is a mandatory filter for the group filtering on Product Key Processing Dimension.
As the Application supports the creation of multiple hierarchies for the same Dimension of analysis, and to avoid displaying results from multiple Dimension Hierarchies at the same time, a mandatory driver to select "Prod Hierarchy Name" must be selected with only a single value simultaneously.
- **Prod Leaf Name:** You can use this filter to select the Product Leaf Name corresponding to the hierarchy.
- **Geography Hierarchy Name:** This is a mandatory filter for the group filtering on the Geography Hierarchy.
As the application supports the creation of multiple hierarchies for the same dimension of analysis, to avoid displaying results from multiple hierarchies at the same time, a mandatory driver to select "Geography Hierarchy Name" must be selected.
- **Geography Leaf Name:** You can use this filter to select a specific Geography value at leaf level related to the underlying instrument tables accounts.
- **Branch Leaf Name:** You can use this filter to select a specific Branch value at leaf level related to the underlying instrument tables accounts.
- **Industry Leaf Name:** You can use this filter to select a specific Industry value at leaf level related to the underlying instrument tables accounts.

In-canvas Variable Prompts

The following screenshot displays this filter's possible options against the Customer Dimension.

Figure 10-240 In-canvas Prompt Filters for Canvas

Select Customer Name All	Select Customer Number All	Select Account Number All

- **Select Customer Name:** You can use this filter to isolate a selected Customer Name for the analysis.
- **Select Customer Number:** You can use this filter to isolate a selected Customer Number for the analysis.
- **Select Account Number:** You can use this filter to isolate a selected Account Number for the analysis.

Retail Joint Accounts Canvas

The Retail Joint Accounts is an alternative scenario that is a dedicated matrix and drives a list of joint accounts by Selection of Customer Name, Customer Number, Account Number.

Figure 10-241 Canvas Joint Accounts



Customer: Summary Information

The Summary Information section outlines the movements by Account Number, Customer Details, Product, and Currency for a given period, presenting the apportioned balance and original limit amount.

Figure 10-242 Customer: Summary Information

Customer: Summary Information					As of Date	30/04/2024
					Functional Currency Code	USD
Account Number	Customer Code	Customer Name	Prod Leaf Name	Account Tenure (Months)	Apportioned Balance	Original/Limit Amount
GOLDCOPY_BUDGET_USD_MORT_00715200200200	7777119	Barbara BRYANT	Current Account	1	10,436	9,488
	7777120	Danny ELLIS	Current Account	1	6,958	6,325
GOLDCOPY_FORECAST_USD_CARDS_02688300300300	7777108	Warren KIM	Offset Mortgage	1	7,050	6,334
	7777109	Ruby GONZALES	Offset Mortgage	1	5,288	4,750
	7777110	Michele ALEXANDER	Offset Mortgage	1	5,288	4,750
GOLDCOPY_FORECAST_USD_CARDS_03458300300300	7777106	Harriet HAMILTON	Offset Mortgage	1	8,321	8,062
	7777107	Sean GRAHAM	Offset Mortgage	1	8,321	8,062

Customer: Join Account Share

The Join Account Share section describes the percentage of Joint Account Share by Account Number, Customer Details and Product during a period.


Figure 10-243 Customer: Join Account Share

Customer: Joint Accounts Share				
Account Number	Customer Code	Customer Name	Joint Account Share	Prod Leaf Name
GOLDCOPY_BUDGET_USD_MORT_00715200200200	7777119	Barbara BRYANT	60%	Current Account
	7777120	Danny ELLIS	40%	Current Account
GOLDCOPY_FORECAST_USD_CARDS_02688300300300	7777108	Warren KIM	40%	Account Offset
	7777109	Ruby GONZALES	30%	Mortgage Offset
	7777110	Michele ALEXANDER	30%	Mortgage Offset
GOLDCOPY_FORECAST_USD_CARDS_03458300300300	7777106	Harriet HAMILTON	50%	Mortgage Offset
	7777107	Sean GRAHAM	50%	Mortgage Offset

Key Performance Metrics

The Key Business Metrics canvas within Retail Join Account by Account Number Presenting the Measurements Net Interest Margin, Risk-adjusted Return on capital, Return on Equity, Return on Total Assets during a period.


Figure 10-244 Key Performance Metrics

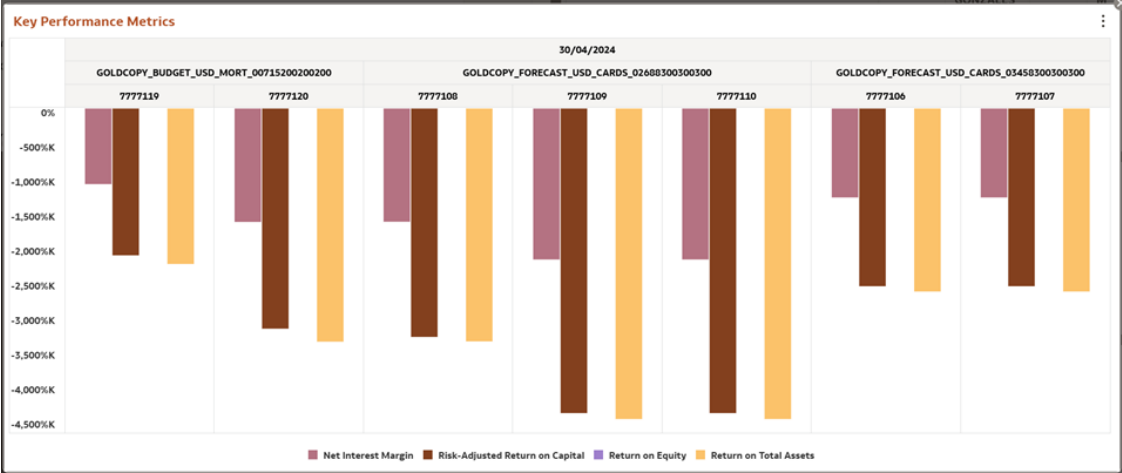

Balance Metrics

The Balance Metrics canvas within Retail Join Account by Account Number, Currency Presenting the Measurements Total Assets and Total Liabilities during a period.


Figure 10-245 Balance Metrics

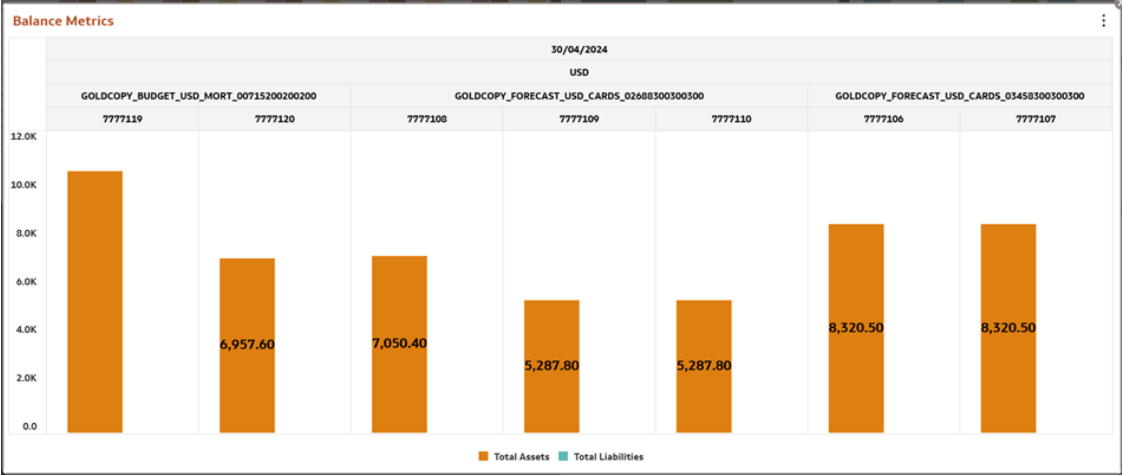

Other Ratios

The Other Ratios canvas within Retail Join Account Number presenting the Measurements Net Fee Income, Gross Interest Income, Interest Coverage Ratio, Operating Expense Ratio during a period.

Figure 10-246 Other Ratios

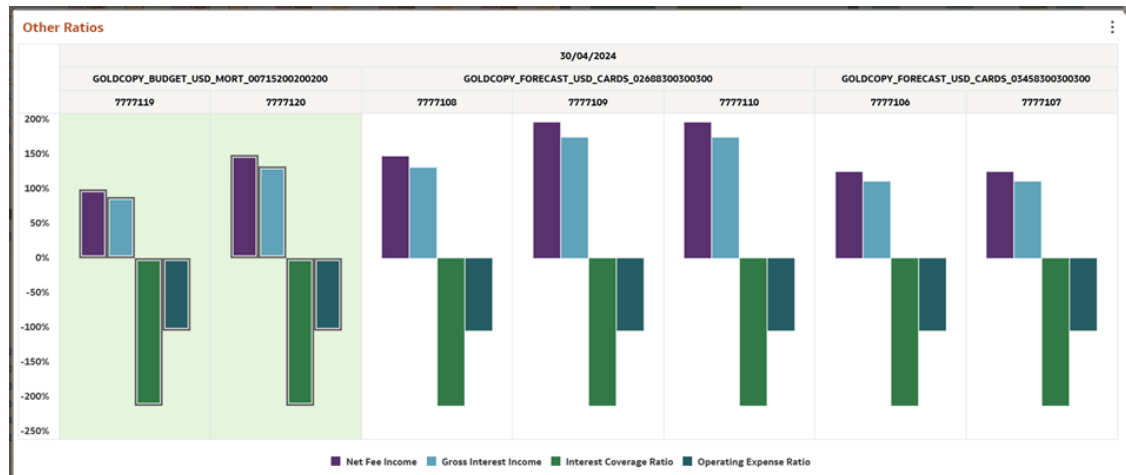

Creating Adhoc Reports and Analysis

The Profitability and Balance Sheet Management Ad-hoc Analysis is provided inside a Shared Folder. Users can use this folder for saving any ad-hoc reports which need to be shared across respective teams. When any patch is applied these reports will not be replaced or purged.

Amend Out-of-the-Box Reports

A user with DV Content Author privileges will have access to amend and save the out-of-the-box reports.

To amend and save the reports:


1. To open the ORACLE Analytics page, from the **Home Page**, select **Home Page**, and then from the **Page Menu** on the top-right corner, select **Open Classic Home**. A new window will open with Classic Home.

Figure 10-247 Classic Home Page



2. Click **Catalog**.

Figure 10-248 Catalog

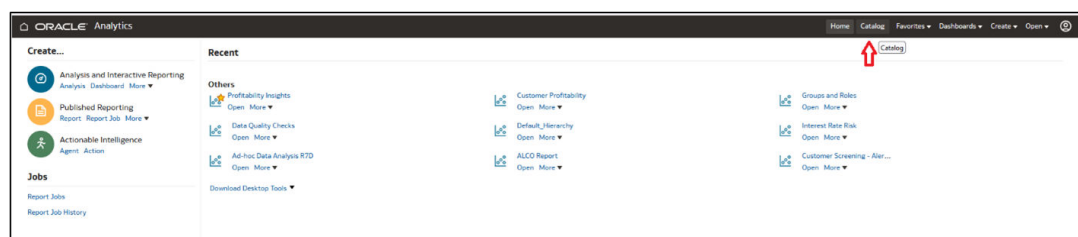

3. Navigate to **Shared Folders** and select the dashboard and subsequently the report from the available list that you want to edit and right click on your mouse. You will find the Copy option as indicated in the below illustration.

Figure 10-249 Copy Option



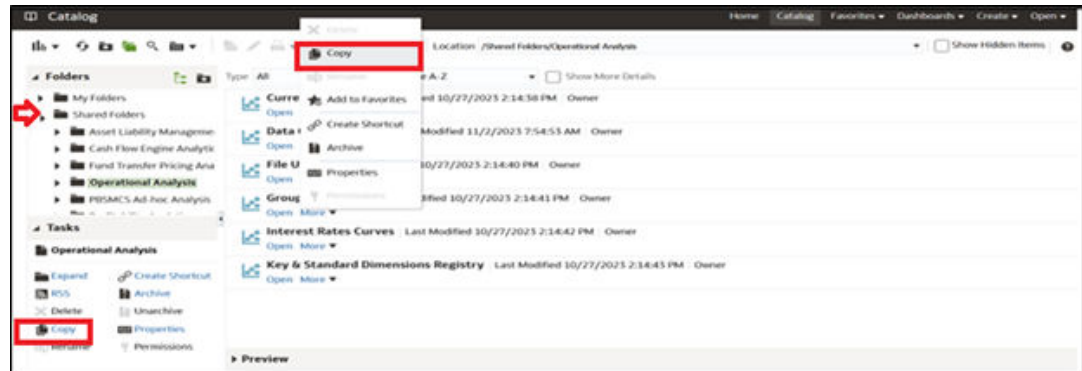


Figure 10-250 Folders

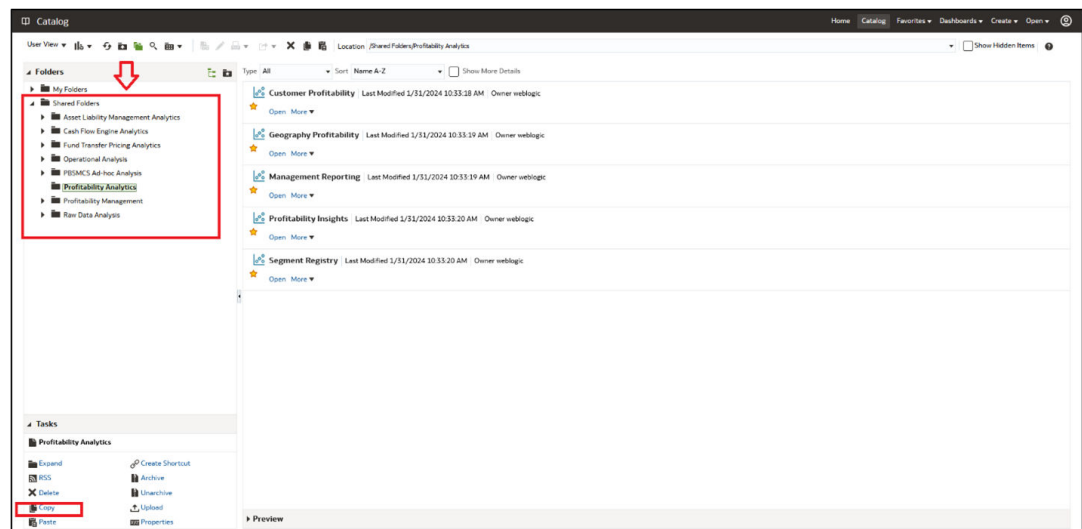

4. Navigate to **My Folders**.

Figure 10-251 My Folders

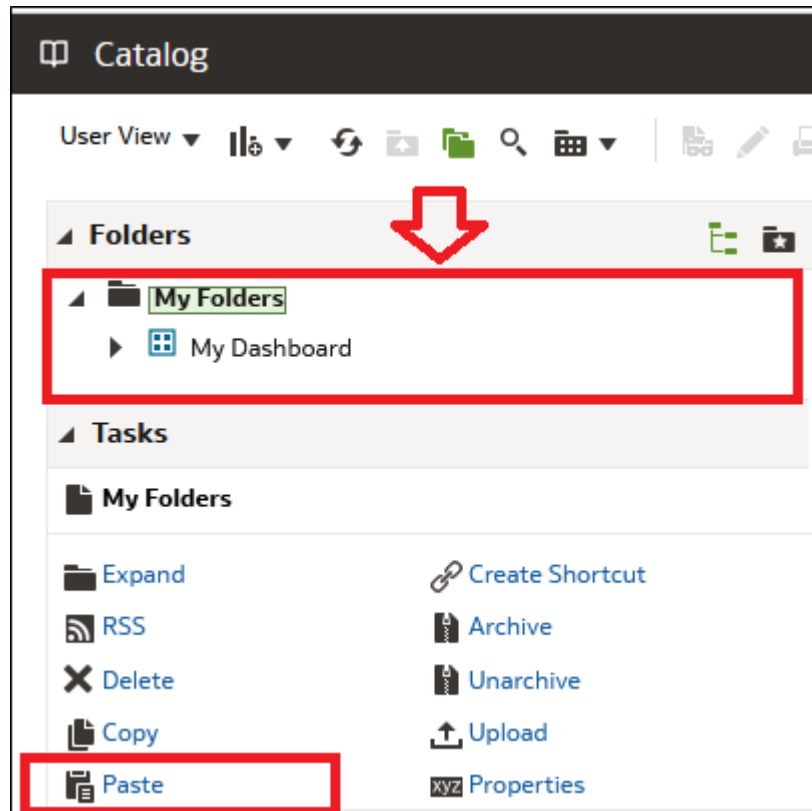


5. Paste the report.
You will be able to edit the Report which is saved inside My Folder.

Ad-hoc Analysis Folder

This Folder can be used by the customers to share the reports across the organization.

Figure 10-252 Ad-hoc Analysis folder

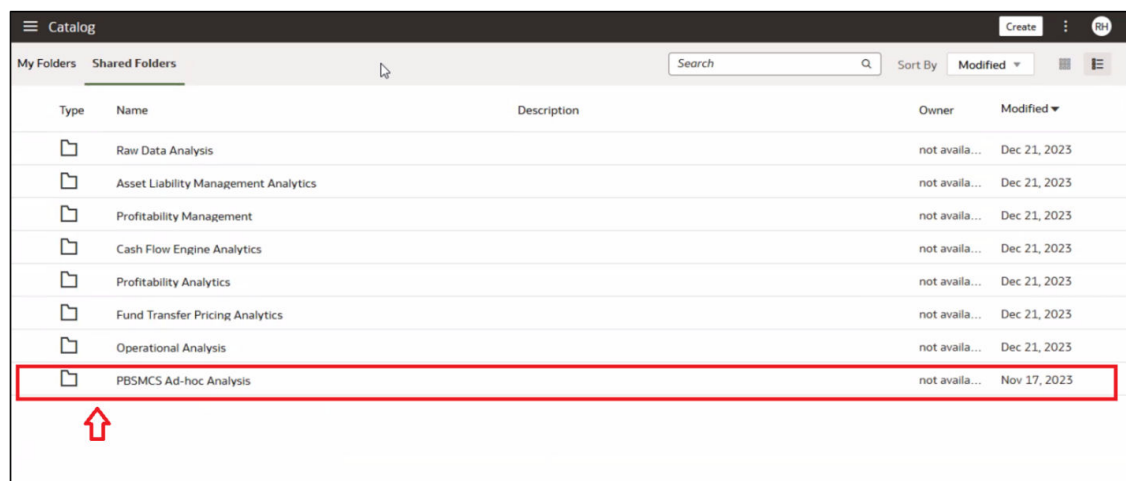

The out-of-the-box reports can be edited and saved inside Adhoc analysis folder. The reports inside these folders will not be updated or refreshed when any provisioning happens.


Working with Out-of-the-Box Subject Area

A user with DV Content Author credentials will have access to create new reports. The DV Consumer will have Read Only access.

To work with OOTB Subject Area:

1. To open the ORACLE Analytics page, from the **Home Page**, select **Home Page**.
2. Click the **Create** button and select **Workbook** as shown below.


Figure 10-253 Create



This opens the Add Dataset window.


3. Select the **Subject Areas** tab. You will find all the relevant subject areas listed as follows.

Figure 10-254 Subject Areas

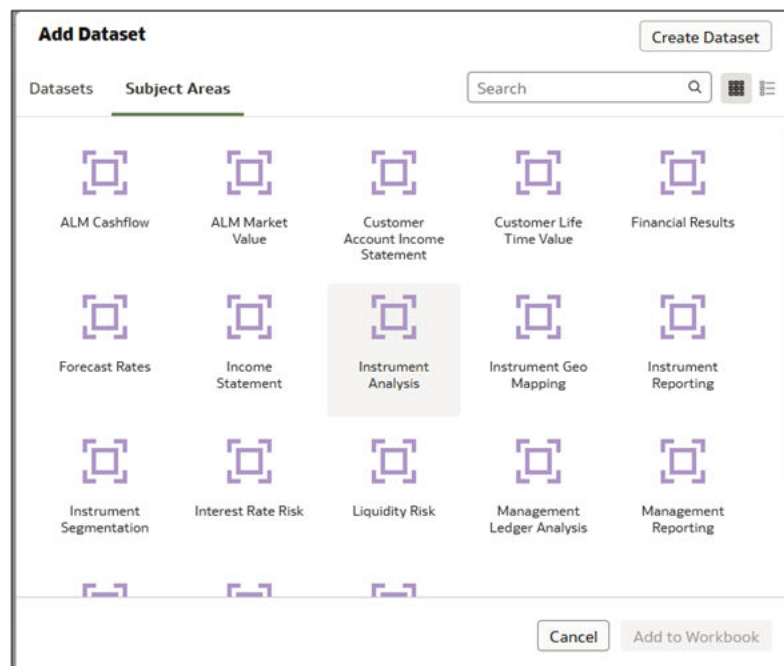

4. You can double click to select a particular Subject Areas and a new canvas will open up with the elements of the selected subject area.

Figure 10-255 New Workbook

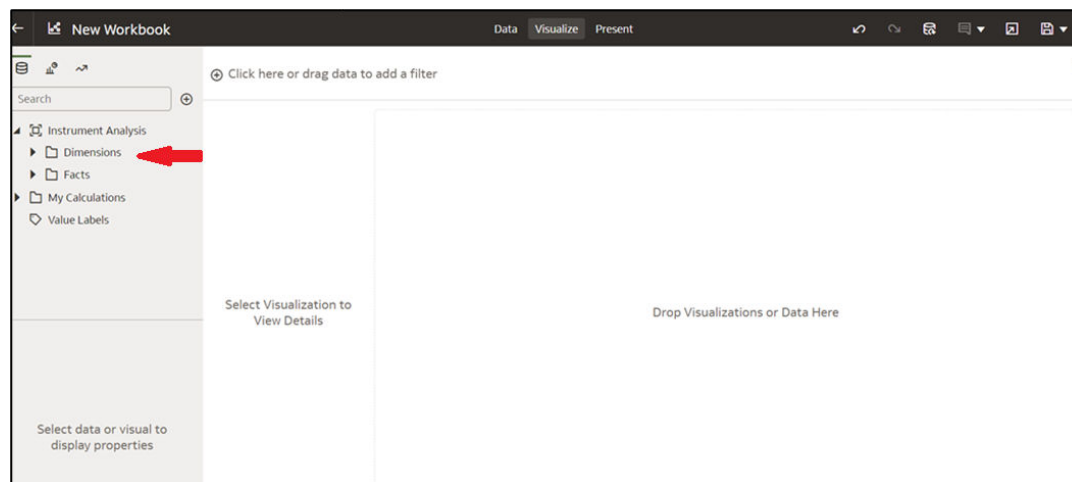

5. Expand the **Dimensions** and **Facts** and drop the relevant items on to the canvas. By default the best visualization/ chart type for the given data is displayed.

Migrating Analytics Content between Tenants

Content migration is supported exclusively for custom analyses that are built based on Subject Areas.

For step-by-step guidance on exporting and importing content between Oracle Analytics instances, please refer to the *Oracle Analytics* documentation.

Technical Documents

This chapter covers the following topics:

- [Run Chart](#)
- [Data Flow](#)
- [Customer Master Loader](#)
- [Customer Hierarchy Loader](#)
- [Retail Joint Accounts Loader](#)
- [Reporting Data Model](#)

Run Chart

Run Chart allows to understand the sequence of tasks to be performed to ensure valid Data Flow in the product. It contains the details about Data Loading for all mandatory tables for the product and the sequence of execution of Seeded Tasks or Batches.

For the Profitability Analytics Cloud Service Run Chart, see the [Doc ID: 2869409.1](#) under the Profitability Analytics Cloud Service Technical Documents header.

Data Flow

Data Flow is a visual representation of the Run Chart. It allows to understand the sequence of tasks including functional and logical processing steps at a high level.

For downloading the Profitability and Balance Sheet Management Cloud Service Data Flow, refer to the [Doc ID: 2869409.1](#) to retrieve the Profitability and Balance Sheet Management Cloud Service Glossary of the Reporting Data Model (RPD Subject Areas).

Customer Master Loader

The Customer Master Loader allows the user to load the Customer Master Information required by the Profitability Analytics Cloud Service to enrich the demographics at the account-level. To load the Customer Master Data, you need to use the Data Loader service. First you need to upload the data, and then run a Batch to propagate the data into the processing Processing Layer.

To load the data, follow these steps:

1. Navigate to **Profitability Management Cloud Service**. From the LHS menu, select **Data Management Tools**, select **Data File Administration**, and then select **File upload and download** to display the File Upload/Download screen.

The File Upload/Download screen displays the list of files that are uploaded to the Object Store. The list displays the following details for each file:

- **File ID:** The unique file id. This is auto generated during upload.
- **Prefix:** The prefix added to the file name.

- **File Name:** The name of the uploaded file.
 - **Stripe Name:** The unique identifier for storing the files.
 - **Uploaded Date:** The file upload date.
 - **Download File:** Click the Download icon to download a copy of the file.
 - **Delete:** Click Delete to delete the uploaded file.
2. Click **Drag and Drop** to browse and select a file for upload from the local directory. You can also browse to the local directory from the File Explorer and select file and drop it here.

The File Upload/Download service supports upload of TXT, DAT, and CSV format files.

Name of the Data File must follow the format as given below:

- A prefix as **input_yyyymmdd** where the date format is related to the As of Date of Interest (i.e., 02-May-2023 becomes 20230502).
- A suffix as **_STG_CUSTOMER_MASTER.dat**.
- An example of a Data File Name could be:
input_20230502_STG_CUSTOMER_MASTER.dat.

 Note

The file name is case-sensitive.

For a sample customer master loader, click [input_YYYYMMDD_STG_CUSTOMER_MASTER.dat](#).

For more information about File Upload and Download, see [File Upload and Download](#).

3. After selecting the file to upload, click **Upload**.
The UI displays a confirmation message *Upload successful*.
4. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Schedule Batch**.
5. Select the **Batch** that is a seeded batch labeled as **Customer Master** and click **Edit Parameters**. In the Dynamic Parameters pop-up window, change the date to the relevant As-of-Date, and then save the batch.
6. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Execute Batch**.
7. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Monitor Batch**.
8. Select the **Batch** and then select the **MISDATE** and the **Batch name**. There may be multiple executions of the Customer Master Loader batch. Select the latest execution and click **Start Monitor**.
The UI displays the Status of the batch.

For more details about Scheduler processes, see the following links:

- [Schedule Batch](#)
- [Monitor Batch](#)

Customer Hierarchy Loader

The Customer Hierarchy Loader allows the user to load the Customer Hierarchy Information required by the Profitability Analytics Cloud Service to enrich the demographics at the account-level. To load the Customer Hierarchy Data, you need to use the Data Loader service. First you need to upload the data, and then run a Batch to propagate the data into the processing Processing Layer.

To load the data, follow these steps:

1. Navigate to **Profitability Management Cloud Service**. From the LHS menu, select **Data Management Tools**, select **Data File Administration**, and then select **File upload and download** to display the File Upload/Download screen.
The File Upload/Download screen displays the list of files that are uploaded to the Object Store. The list displays the following details for each file:
 - **File ID**: The unique file id. This is auto generated during upload.
 - **Prefix**: The prefix added to the file name.
 - **File Name**: The name of the uploaded file.
 - **Stripe Name**: The unique identifier for storing the files.
 - **Uploaded Date**: The file upload date.
 - **Download File**: Click the Download icon to download a copy of the file.
 - **Delete**: Click Delete to delete the uploaded file.
2. Click **Drag and Drop** to browse and select a file for upload from the local directory. You can also browse to the local directory from the File Explorer and select file and drop it here.

The File Upload/Download service supports upload of TXT, DAT, and CSV format files.

Name of the Data File must follow the format as given below:

- A prefix as **input_yyyymmdd** where the date format is related to the As of Date of Interest (i.e., 02-May-2023 becomes 20230502).
- A suffix as **_STG_CUSTOMER_HIERARCHY.dat**.
- An example of a Data File Name could be:
input_20230502_STG_CUSTOMER_HIERARCHY.dat.

Note

The file name is case-sensitive.

For a sample Customer Hierarchy Loader file, click [input_YYYYMMDD_STG_CUSTOMER_HIER.dat](#)

For more information about File Upload and Download, see [File Upload and Download](#).

3. After selecting the file to upload, click **Upload**.
The UI displays a confirmation message *Upload successful*.
4. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Schedule Batch**.

5. Select the **Batch** that is a seeded batch labelled as **Customer Hierarchy** and click **Edit Parameters**. In the Dynamic Parameters pop-up window, change the date to the relevant As-of-Date, and then save the batch.
6. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Execute Batch**.
7. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Monitor Batch**.
8. Select the **Batch** and then select the **MISDATE** and the **Batch name**. There may be multiple executions of the Customer Hierarchy Loader batch. Select the latest execution and click **Start Monitor**.
The UI displays the Status of the batch.

For more details about Scheduler processes, see the following links:

- [Schedule Batch](#)
- [Monitor Batch](#)

Retail Joint Accounts Loader

The Retail Joint Accounts Loader allows the user to load the Retail Joint Accounts Information required by the Profitability Analytics Cloud Service. To load the Retail Joint Accounts Data, you need to use the Data Loader service. First you need to upload the data, and then run a Batch to propagate the data into the processing Processing Layer.

To load the data, follow these steps:

1. Navigate to **Profitability Management Cloud Service**. From the LHS menu, select **Data Management Tools**, select **Data File Administration**, and then select **File upload and download** to display the File Upload/Download screen.
The File Upload/Download screen displays the list of files that are uploaded to the Object Store. The list displays the following details for each file:
 - **File ID**: The unique file id. This is auto generated during upload.
 - **Prefix**: The prefix added to the file name.
 - **File Name**: The name of the uploaded file.
 - **Stripe Name**: The unique identifier for storing the files.
 - **Uploaded Date**: The file upload date.
 - **Download File**: Click the Download icon to download a copy of the file.
 - **Delete**: Click Delete to delete the uploaded file.
2. Click **Drag and Drop** to browse and select a file for upload from the local directory. You can also browse to the local directory from the File Explorer and select file and drop it here.

The File Upload/Download service supports upload of TXT, DAT, and CSV format files.

Name of the Data File must follow the format as given below:

- A prefix as **input_yyyymmdd** where the date format is related to the As of Date of Interest (i.e., 02-May-2023 becomes 20230502).
- A suffix as **_STG_CS_JOINT_ACCOUNTS.dat**.
- An example of a Data File Name could be:
input_20230502_STG_CS_JOINT_ACCOUNTS.dat.

Note

The file name is case-sensitive.

For a sample Joint Accounts Loader file, click [input_20250131_STG_CS_JOINT_ACCOUNTS.dat](#).

For more information about File Upload and Download, see [File Upload and Download](#).

3. After selecting the file to upload, click **Upload**.
The UI displays a confirmation message *Upload successful*.
4. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Schedule Batch**.
5. Select the **Batch** that is a seeded batch labelled as **PA Joint Accounts** and click **Edit Parameters**. In the Dynamic Parameters pop-up window, change the date to the relevant As-of-Date, and then save the batch.
6. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Execute Batch**.
7. From the LHS menu, navigate to **Operations and Processes**, select **Scheduler**, and then select **Monitor Batch**.
8. Select the **Batch** and then select the **MISDATE** and the **Batch name**. There may be multiple executions of the Joint Accounts Loader batch. Select the latest execution and click **Start Monitor**.
The UI displays the Status of the batch.

For more details about Scheduler processes, see the following links:

- [Schedule Batch](#)
- [Monitor Batch](#)

Reporting Data Model

Please refer to the [Doc ID: 2869409.1](#) to retrieve the Profitability and Balance Sheet Management Cloud Service Glossary of the Reporting Data Model (RPD Subject Areas).