# Oracle FCCM Transaction Filtering Cloud Service

**Administration Guide** 





Oracle FCCM Transaction Filtering Cloud Service Administration Guide, Release 25.11.01

G46711-01

Copyright © 2014, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

| Preface     |   |    |
|-------------|---|----|
| Related Re  | esources  | i  |
| Help        |   | i  |
| Audience    |   | i  |
| Document    | ation Accessibility   | i  |
| Diversity a | nd Inclusion  | i  |
| Convention  | ns  | ii |
| Comments    | s and Suggestions   | ii |
| Introduc    | ction   |    |
| 1.1 Acce    | essing the OFS Transaction Filtering Application                                | 2  |
| Applica     | tion Level Parameter  |    |
| 2.1 Con     | figuring Retrigger Time Interval  | 1  |
|             | figuring GEN AI Based Keyword Extraction for Fuzzy Matching of Narrative Fields | 1  |
| Map Ju      | risdiction to Pipeline  |    |
|             |   |    |
| Exempt      | ion Configuration   |    |
| 4.1 Exer    | mption List Management  | 1  |
| 4.1.1       | Select Columns  | 2  |
| 4.1.2       | Filter  | 3  |
| 4.1.3       | Rows Per Page   | 3  |
| 4.1.4       | Format  | 3  |
| 4.1.5       | Save Report   | 3  |
| 4.1.6       | Reset   | 3  |
| 4.1.7       | Download  | 4  |
| 4.2 Addi    | ing an Exemption  | 4  |
| 4.2.1       | Adding a Exemption through Case Management                                      | 4  |
| 4.2.2       | Adding a Exemption through TF Administration                                    | 4  |

| 5.1 Configuring the ISO20022 Message Parameters                           | 1 |
|---|---|
| 512 551mgaming the 16020022 mesoage i arameters                           | 1 |
| 5.2 Configuring GEN AI in ISO20022 Configuration Admin                    | 4 |
| SWIFT Configuration Admin   |   |
| 6.1 Message and Screening Configurations Window                           | 1 |
| 6.1.1 Adding or Updating a New Message Type                               | 2 |
| 6.1.2 Configuring the References  | 2 |
| 6.2 <message type=""> Subfield Level Configuration Window</message>       | 2 |
| 6.3 <message type=""> Screening Configuration Window</message>            | 4 |
| 6.3.1 Enabling or Disabling a Web Service                                 | 5 |
| 6.3.2 Updating and Removing a Web Service                                 | 6 |
| 6.3.3 Populating Data for the Trade Goods and Trade Port Web Services     | 6 |
| 6.4 <message type=""> Other Field/Subfield Configuration Window</message> | 7 |
| FED Configuration Admin   |   |
| 7.1 Message Type Configuration Window                                     | 1 |
| 7.1.1 Adding or Updating a New Message Type                               | 1 |
| 7.1.2 Configuring Message and Transaction References                      | 2 |
| 7.2 <message type=""> Subfield Level Configuration Window</message>       | 2 |
| 7.3 <message type=""> Screening Configuration Window</message>            | 3 |
| 7.3.1 Enabling or Disabling a Web Service                                 | 5 |
| 7.3.2 Updating and Removing a Web Service                                 | 5 |
| 7.3.3 Populating Data for the Trade Goods and Trade Port Web Services     | 5 |
| 7.4 <message type=""> Other Field/Subfield Configuration Window</message> | 5 |
| Run the ISO20022 Batch Screening  |   |
| 8.1 Prerequisites   | 1 |
| 8.2 Steps to Run a ISO20022 Batch   | 2 |
| 8.3 Purge Batches Available for ISO20022 Batch                            | 6 |
| Run the NACHA Batch Screening   |   |
| 9.1 Prerequisites   | 1 |
| 9.2 Steps to Run a NACHA Batch  | 2 |

### A Message Categories and Message Types

| A.1 | SWIFT Message Types    | A-1 |
|-----|------------------------|-----|
| A.2 | ISO20022 Message Types | A-2 |
| A.3 | Fedwire Message Types  | A-3 |
| A.4 | NACHA Message Types    | A-3 |



### **Preface**

*Transaction Filtering Administratin Guide* provides instructions that can help you use the Oracle Financial Services Transaction Filtering Cloud Service (OFS TF CS) application.

### **Related Resources**

For more information, see these Oracle resources:

- Oracle Public Cloud: http://cloud.oracle.com
- Community: Use <a href="https://community.oracle.com/customerconnect/">https://community.oracle.com/customerconnect/</a> to get information from experts at Oracle, the partner community, and other users.
- Training: Take courses on Oracle Cloud from <a href="https://education.oracle.com/oracle-cloud-learning-subscriptions">https://education.oracle.com/oracle-cloud-learning-subscriptions</a>.

### Help

Use Help Icon to access help in the application. If you don't see any help icons on your page, click your user image or name in the global header and select Show Help Icons. Not all pages have help icons. You can also access the <a href="https://docs.oracle.com/en/">https://docs.oracle.com/en/</a> to find guides and videos.

### **Audience**

This document is intended for users who are responsible for provisioning and activating Oracle FCCM Cloud Service or for adding other users who would manage the services, or for users who want to develop Oracle Cloud applications.

### **Documentation Accessibility**

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <a href="http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc">http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc</a>.

### **Access to Oracle Support**

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

### **Diversity and Inclusion**

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to



build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

### Conventions

The following text conventions are used in this document:

| Convention | Meaning  |  |
|------------|--|--|
| boldface   | Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.         |  |
| italic     | Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.                          |  |
| monospace  | Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter. |  |

# **Comments and Suggestions**

Please give us feedback about Oracle Applications Help and guides! You can send an e-mail to: https://support.oracle.com/portal/.

### Introduction

Oracle Financial Services Transaction Filtering is a Sanctions screening system that identifies Individuals, entities, cities, countries, goods, ports, BICs, and Stop keywords that may either be suspicious, restricted, or sanctioned with relation to a financial transaction that is processed through the Transaction Filtering application. The application enables you to integrate with any clearing or payment system, accept messages from the source system, and scans them against different watch lists maintained within the application to identify any suspicious data present within the message. The Transaction Filtering application can scan messages which are in the SWIFT, ISO20022, or Fedwire category.

Financial Institutions are required to comply with regulations from different authorities. Some of them are as follows:

- USA PATRIOT Act
- U.S. Treasury's Office of Foreign Assets Control (OFAC), USA
- Office of the Superintendent of Financial Institutions (OSFI), Canada
- Financial Action Task Force (on Money Laundering) (FATF/GAFI)
- EU Commission
- Country-specific authorities

While the regulations can differ between countries, the spirit of regulatory intervention is uniform, and that is to hold financial institutions responsible and accountable if they have been a party, intentionally or unintentionally, to a criminal or terrorist-related transaction.

Sanctions include the withholding of diplomatic recognition, the boycotting of athletic and cultural events, and the sequestering of the property of citizens of the sanctioned country. However, the forms of sanctions that attract the most attention and are likely to have the greatest impact are composed of various restrictions on international trade, financial flows, or the movement of people.

Transaction Filtering against government-regulated watch lists and internal watch lists is a key compliance requirement for financial institutions across the globe. At the turn of the century, Financial Institutions (FIs) were expected to identify customers who were either sanctioned or who lived in sanctioned countries and identify any transactions which were associated with these customers. FIs are now expected to also identify any suspicious dealings and parties involved in the transaction, and more recently identify information that is deliberately hidden or removed.

The Transaction Filtering application delivers a strong, effective filter that identifies all sanctioned individuals or entities with true positives and exploits all available information (internal and external) to reduce false positives and therefore minimizes the operational impact on Fls.



### 1.1 Accessing the OFS Transaction Filtering Application

The OFS TF CS application is qualified to run on Microsoft Edge Chromium or Google Chrome web browsers.

Your System Administrator provides the intranet address Uniform Resource Locator (URL), User ID, and Password to access the application. After your first login, you are prompted to change your password.

To access the OFS TF CS application, follow these steps:

- Enter the URL in the web browser. The Oracle Cloud Account Sign In page is displayed.
- Enter the login field details.

Table 1-1 Login Fields

| Fields    | Description  |
|-----------|--|
| User Name | Enter the unique identification of the user. You can enter up to twenty alphanumeric values. |
| Password  | Enter the unique password of the user. You can enter up to twenty alphanumeric values.       |

- 3. Click **Sign In**. The Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service landing page is displayed.
- 4. On the LHS menu, Click Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service.
- 5. Click Application Administration. The Application Administration page is displayed.
- **6.** Select **Customer Screening Administration**. The Customer Screening Administration page is displayed.
- 7. Select the required options (Pipeline, Entity Type, Jurisdiction Mapping or Case Type Priority Mapping). The corresponding page is displayed

# **Application Level Parameter**

Use the Application Level Parameter tab to configure the following parameters for the Transaction Filtering application.

### **Topics:**

- Configuring Retrigger Time Interval
- Configuring GEN AI Based Keyword Extraction for Fuzzy Matching of Narrative Fields

## 2.1 Configuring Retrigger Time Interval

Use this section to retrigger time interval.

To configure the parameters, follow these steps:

- 1. Navigate to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service landing page.
- Click Transaction Filtering Administration. The Transaction Filtering Administration page is displayed.
- 3. Click **Application Level Parameter** to display the configuration page.
- In the Retrigger section, enter the value for Retrigger Time Interval (in minutes) and Retry Count.
- 5. Click **Save** to save the configuration.

# 2.2 Configuring GEN AI Based Keyword Extraction for Fuzzy Matching of Narrative Fields

Use this section to configuring GEN AI Based keyword extraction for fuzzy matching of narrative fields.

Transaction narratives are open text fields that allow users to enter any kind of information. For example, names of individuals, entities, and vessels, countries, cities, goods, ports, and identifiers, and stop keywords.

Since these fields lack a predefined format, identifying relevant keywords for screening becomes challenging.

As a result, the system may generate too many false positive matches. GEN AI helps to extract exact keywords, which can then be used for precise and accurate matches.

THE GEN AI interface allows administrators to enable/disable and choose the mode of Gen Alassisted narrative extraction for transaction screening.

The following are two types of GENAI Screening Mode:

• GEN AI ONLY – This mode enables the system to extract keywords from narrative text using GEN AI and then screen the extracted narrative keywords.




 GEN AI + NON-GEN AI - This mode enables the system to extract keywords from narrative text using GEN AI and then screen both the extracted keywords and the original narrative text.

To configuring GEN AI Based keyword extraction for fuzzy matching of narrative fields, follow these steps:

- Navigate to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service landing page.
- Click Transaction Filtering Administration. The Transaction Filtering Administration page is displayed.
- 3. Click **Application Level Parameter** to display the configuration page.

Figure 2-1 GENAI Screening Mode

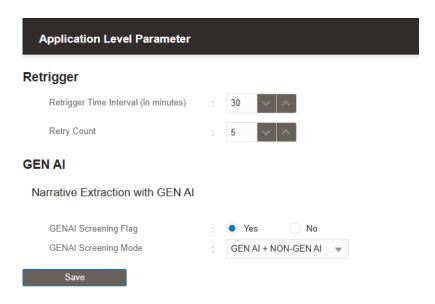

- In the GENAI section, to enable or disable GEN AI, select Yes or No in the GENAI Screening Flag.
- 5. To select GENAI Screening Mode, select the GEN AI ONLY(Only GEN AI extracted key words) or GEN AI + NON-GEN AI (Original narrated text with GEN AI extracted key words) from the dropdown.
- **6.** Click **Save** to save the configuration.

Once you enable GEN AI, you must configure the following messages:

- Configuring GEN AI in ISO20022 Configuration Admin
- <Message Type> Screening Configuration Window

# Map Jurisdiction to Pipeline

Procedure to map the jurisdiction to the pipeline.

Pipelines are mapped to message category and one or more jurisdictions and business domain using the **Pipeline**, **Message Category**, **Jurisdiction**, **Business Domain Mapping** window. This is a one-time activity, and needs to be performed only if you use the TF screening feature. There are two ready-to-use pipeline jobs for TF screening, one to run the Swift And Fedwire Screening job and one to run the ISO Screening job. The Swift And Fedwire Screening job has the Swift And Fedwire message type mapped to it, and the ISO Screening job has the ISO message types mapped to it.

To map the job to one or more jurisdictions, select the jurisdiction in the **Jurisdiction Name** field. You can select the **All** check box to map the job to all jurisdictions.

You can also add a new pipeline job. To add a new pipeline job and map the job to an entity and a jurisdiction, follow these steps:

1. Click Add in line with the Pipeline, Message Category, Jurisdiction, Business Domain Mapping label.

A new row is displayed.

- 2. Select the pipeline job name from the **Pipeline Job Name** drop-down list.
- 3. Click Add in line with the Message Category, Jurisdiction, Business Domain Mapping label.

A new row is displayed.

- 4. Select the message category from the **Message Category** drop-down list.
- 5. Select the jurisdiction name from the **Jurisdiction Name** drop-down list. Select the **All** check box to map the job to all jurisdictions.
- Select the business domain name from the Business Domain drop-down list.
- 7. Select the All check box to map the job to all business domain.

# **Exemption Configuration**

The Transaction Filtering application checks if there is a match or not for every parameter which is enabled, and if there is a match, the record is added to the exemption list.

To enable or disable the exemption parameters, follow these steps:

- Navigate to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service landing page.
- Click Transaction Filtering Administration. The Transaction Filtering Administration page is displayed.
- 3. Click **Exemption Configuration** to display the configuration page. The following exemption parameters are available in the exemption configuration page:
  - payment entity full name

### (i) Note

The payment entity full name must be matched, so it is mandatory to set the value in the Payment Entity Full Name to Yes.

- Watchlist Record Name
- **Payment Entity Jurisdiction**
- Watchlist Name
- Watchlist Record ID
- Payment Account ID
- Select **Yes** to enable the parameter and select **No** to disable the parameter.
- Click **Save** to save the changes.

### 4.1 Exemption List Management

The exemption list provides the exemption summary and corresponding parameter information. User with Reviewer, and Supervisor roles can access the data but only users with Supervisor role can manage the lists under the exemption list Summary.

As a Supervisor, to access the Exemption List follow these steps:

- Login to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service application as a Supervisor.
- 2. Click Transaction Filtering Administration, and select Exemption List. The Exemption summary page is displayed.

You can search for a record using the following criteria in the Exemption list page.

- **Exemption ID**
- Payment Entity Full Name



- Payment Account ID
- Jurisdiction
- Watchlist Record Name
- Watchlist Record ID
- Expiry Date
- Status
- Expiration Status
- Date Added

Click on the **Exemption ID** hyper link for match history, review and manage the exemption data. You can perform following actions on the details page.

- Change Record Parameters: Click to edit the record information.
- View Change History: Click to view the change history of the record.
- Comments: Click to type your comment for the record and click save to add the comment.
- Delete: Click to delete the exemption record.
- Approve: Click to Approve the exemption record. the status changes from Exemption Pending status to Approved.
- Reject: Click to reject the exemption record. the status changes from Exemption Pending status to Rejected.

Click on the Action button to perform the following action:

- Select Columns
- Filter
- Rows Per Page
- Format
- Save Report
- Reset
- Download

### 4.1.1 Select Columns

You can use the Select Column action to select the parameters to display in the exemption list UI. To add new column to the View or delete the column from the View, select the required column from the Do Not Display list or Display in Report list and use the following icon to move columns:

- Use icon to move all Columns from the **Do Not Display** list to the **Display in Report** list to add new columns
- Use icon to move the selected Columns from the Do Not Display list to the Display in Report list to add new columns
- Use icon to move the selected Columns from the **Display in Report** list to the **Do Not Display** list to delete the columns



 Use icon to move All Columns except Alert ID from Display in Report list to the Do Not Display list to delete the columns

### 4.1.2 Filter

You can filter the data to be displayed by selecting one of the criteria as mentioned in the Exemption Filter. You can also reset the filter criteria by clicking the **Clear** button. To apply the filter end the following fields and click **Apply**:

- Filter by Column
  - Column
  - Operator
  - Expression
- Filter by Row
  - Name
  - Filter Expression
  - Column Aliases
  - Function/Operators

### 4.1.3 Rows Per Page

You can use the Rows Per Page action to set the number exemption records per page.

### **4.1.4** Format

You can use the Format action to customize the exemption record UI view. Following formating actions are available:

- Sort
- Control Break
- Highlight
- Compute
- Aggregate
- Chart
- Group By
- Pivot

### 4.1.5 Save Report

You can use the **Save** action to save the report settings. Enter the name, description and click on the **Apply** button to save the report setting. You can also reset the saved report by clicking the **Clear** button.

### 4.1.6 Reset

You can use the Reset action to restore report to the default settings.



### 4.1.7 Download

You can use the Download action t download the exemption report. The following report download formats are available:

- CSV
- HTML
- Excel
- PDF
- Sent as Email

### 4.2 Adding an Exemption

You can add the exemption record through the following ways:

- Transaction Filtering Administration
- Case Management

### 4.2.1 Adding a Exemption through Case Management

The Analyst can add the exemption record in the Case Investigation User Interface. It then goes to the Supervisor for approval. If the Supervisor approves the exemption record, it is added to the exemption list. For more information on case investigation, see Oracle FCCM Cloud Services Case Investigation guide.

To add a new exemption record follow the subsequent steps:

- Navigate to Case Search and List Window. The Case Search and List page displays as a
  tab with a list of all open cases and a tab with a list of all open cases currently assigned to
  the logged in user.
- Select the case by clicking the corresponding Case ID hyper link to view the details. The Case Details page is displayed.
- In the Events list of the Case Details page, select one or more check boxes associated with events and click Add to Exemption. The Add to Exemption configuration page is displayed.
- 4. Select the part of text to be added in exemption list click move icon.
- 5. Click Clear to delete the selected part of the name.
- 6. Select the Expiry Date.
- Click Submit for Approval to submit the allow list name for approval or Click Cancel to close the window.

The exemption record is then send to the Supervisor for approval. The Supervisor can approve or reject the alert by clicking Actions.

### 4.2.2 Adding a Exemption through TF Administration

To add a new exemption record follow the subsequent steps:



### ① Note

Only the Supervisor can perform this action.

- Login to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service application as a Supervisor.
- Click Transaction Filtering Administration, and select Exemption List. The Exemption summary page is displayed.
- 3. Click **Add New Record**. The Add exemption page is displayed.
- 4. Enter the subsequent parameters:
  - Payment Details
    - Payment Full Name: Enter the record name.
    - Payment Entity Jurisdiction: You can either enter a jurisdiction name or select from the drop-down list.
    - Payment Account ID: Enter the identifier.
  - Watchlist Details
    - Watchlist Record Name: Enter the origin record name.
    - Watchlist Name: Enter the name of the origin.
    - Watchlist Record ID: Enter the record ID.
  - Date
    - Expiration Date: Select the expiration date
- Click Save to add the new exemption record to exception list. Click Cancel to close the Add exception page.

### Note

The newly added exemption record have Approved status.

### 4.2.2.1 Approving or Rejecting Alerts

To approve or reject the case as a Supervisor, follow these steps:


- Login to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service application as a Supervisor.
- Click Transaction Filtering Administration, and select Exemption List. The Exemption summary page is displayed.
- 3. Click on the **Exemption ID** hyper link to display the summary page.
- 4. Click Approve to approve the case or click Reject to reject the case. If the Supervisor approves the case, the status changes from Exemption Pending status to Approved. If the Supervisor rejects the case, the status changes from Exemption Pending status to Rejected.



(i) Note

It is mandatory to add comments after the case is approved or rejected.

Figure 4-1 Case Investigation UI Workflow to add a Exemption Record to the Good Guy List

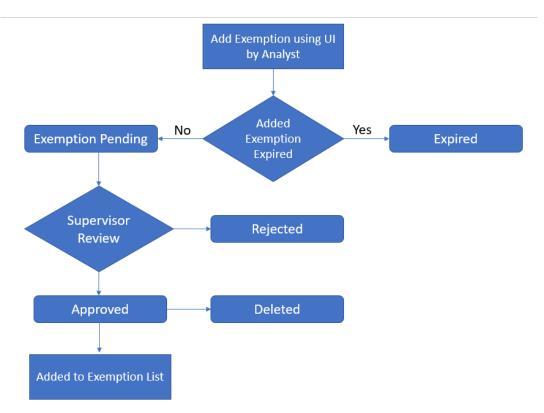

# **ISO Configuration Admin**

This chapter explains how to configure the parameters for the ISO20022 message category. The Configuration window allows you to view the elements associated with an XSD file after you upload the file. The elements are displayed in a tree structure. You must provide the transaction XPath before submitting the file. After the file is submitted, you can view the elements associated with a specific web service and define the XPath priority. This XSD file can be downloaded again. The Run page has information on the different tasks associated with the ISO20022 batch.

### (i) Note

The XPath of an element is the logical structure or hierarchy of the element within the XSD file.

### Topics:

- Configuring the ISO20022 Message Parameters
- **Configuring GEN AI in ISO20022 Configuration Admin**

### 5.1 Configuring the ISO20022 Message Parameters

To configure the ISO20022 message parameters, follow these steps:

- Navigate to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service landing page.
- Click **Transaction Filtering Administration**. The Transaction Filtering Administration page is displayed.
- Click ISO Configuration Admin. The Configuration window is displayed.
  - The Message List displays the XSD files associated with each message provider /scheme/ message type combination. Click the link in the **Message Provider** column to view the transaction XPaths for the message for every screening type. You can download the XSD for a message by clicking Download in the Download XSD column. The XSD is downloaded as a zip folder; unzip the folder to view the XSD files.
- To upload a new XSD file, click Add Message. An Attachment Details dialog box opens.
- Select the message provider and message type for the web service. If required, you can also select the message scheme. If you select a message scheme, then the message types change depending on the selected combination of the message provider and message scheme.
- To upload the parent XSD file and one or more child XSD files, click **Upload** and select the XSD file from your local drive. After you select the file and click Open, the XSD file name appears next to the Upload button. Select the radio button next to the primary file name and click **Upload**. A confirmation message appears, "File uploaded successfully." The basic elements related to the uploaded file appear in a tree view.



If you want to see the XPath of an element, select the element from the drop-down field. In the example window, the XPath for the StrNm element is highlighted in red.

To choose the Batch XPath or the Transaction XPath of the element, right-click any element node in the Tree view and click Batch or Transaction respectively. The values appear in the tree view. It is mandatory to select the Transaction XPath Configuration before you submit the uploaded files.

### (i) Note

To view the child elements for a parent element, mouse over the parent element and click the parent element in the Tree view. If Zero is displayed beside the element name, it means that there are no more child elements you can drill down

- 7. Click **Submit**. The ISO20022 parameter name appears in the Message List section with Draft attached to the parameter name.
- 8. Navigate to ISO20022/XML Configuration Admin in the Admin UI. To complete the configuration, click the message provider link. The XML Screening Configuration tab is displayed.

In this tab, you can view the details of the element XPaths available for the selected web service. You can also perform the following actions:

Table 5-1 Other Actions

| Do this   |
|---|
| Click Add. The Add a web service configuration fields is displayed.   |
| Select the message direction and enable or disable the web service and click <b>Save</b> . Clicking <b>Clear</b> clears any values selected. If you click <b>Cancel</b> , the fields disappear.   |
| In the Tree view, right-click any element node and click the element to view the element's XPath. The fields appear in the <b>Screening XPath Configuration</b> List section.   |
| Select the configuration you want to update and click <b>Update</b> . The fields shown in the previous row appear. Make the required changes and click <b>Save</b> . The updated values are displayed in the <b>Screening XPath Configuration List</b> section. |
| Select the configuration you want to remove and click <b>Remove</b> . The selected configuration is removed from the <b>Screening XPath Configuration List</b> section.   |
| Click Enable All.   |
| Click Disable All.  |
|   |

Navigate to ISO20022/XML Configuration Admin in the Admin UI and click the message provider link. To add the screening configuration of External Attribute, select the Attributes under the Screening External Attribute Configuration list. The Screening External **Attribute Configuration** list is displayed. In this tab, you can view the details of the attribute name, enable status, and message direction details.



Table 5-2 Other Actions

| То                                      | Do this   |
|---|---|
| Add an external attribute configuration | Click Add. The Add an External Attribute configuration fields is displayed: Select the message direction and enable or disable the web service and click Save. Clicking Clear clears any values selected. If you click Cancel, the fields disappear.                        |
| Update a web service configuration      | Select the configuration you want to <b>update</b> and click Update. The fields shown in the previous row appear. Make the required changes and click <b>Save</b> . The updated values are displayed in the <b>Screening External Attribute Configuration List</b> section. |
| Remove a web service configuration      | Select the configuration you want to remove and click <b>Remove</b> . The selected configuration is removed from the <b>Screening External Attribute Configuration List</b> section.  |
| Enable all web service configurations   | Click Enable All.   |
| Disable all web service configurations  | Click Disable All.  |

**10.** After configuring the External Attributes, give the following attribute names (Same attribute names which are populated in the above tables) in message posting jsp.

Example: SanctionsPost.jsp

11. To view the message tag configurations for a field, click the XML Message Configuration tab. You can also perform the following actions:

**Table 5-3 Other Actions** 

| То                          | Do this   |
|-----------------------------|---|
| Add a message configuration | Click Add. The Add a message configuration fields is displayed. Select the business data value, message direction, enable or disable the value, choose the Priority 1 XPath and Priority 2 XPath, and click Save. Clicking Clear clears any values selected. If you click Cancel, the fields disappear. |
|                             | In the Tree view, right-click any element node and click the element to view it's XPath. The fields appear in the <b>Message Tag Configuration List</b> section.  |



Table 5-3 (Cont.) Other Actions

| То                             | Do this   |
|--------------------------------|---|
| Update a message configuration | Select the configuration you want to update and click <b>Update</b> . The fields shown in the previous row appear. Make the required changes and click <b>Save</b> . The updated values are displayed in the <b>Message Tag Configuration List</b> section. |
| Remove a message configuration | Select the configuration you want to remove and click <b>Remove</b> . The selected configuration is removed from the <b>Message Tag Configuration List</b> section.   |

12. Click **Submit**. The ISO20022 parameter name is updated in the **Message List** without **Draft**.

# 5.2 Configuring GEN AI in ISO20022 Configuration Admin


Use this section to configuring GEN AI in ISO20022 configuration admin.

The system allows you to select the messages for which you want to use Gen Al-based keyword extraction for fuzzy screening of narrative fields.

To enable GEN AI in the ISO20022 message parameters, follow these steps:

- 1. Navigate to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service landing page.
- Click Transaction Filtering Administration. The Transaction Filtering Administration page is displayed. 3.
- Click ISO Configuration Admin. The Configuration window is displayed.
- **4.** The Message List displays the XSD files associated with each message provider /scheme/ message type combination.
- 5. Click the link in the **Message Provider** column to view the transaction XPaths for the message for every screening type.

Figure 5-1 XML Screening Configuration

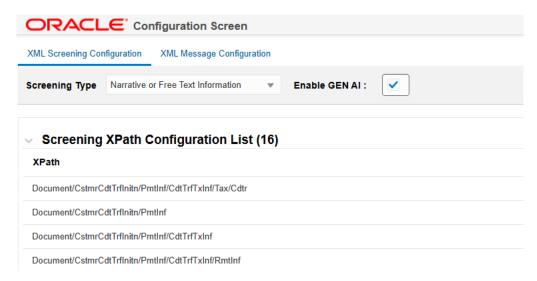



- 6. In the Screening Type dropdown, select **Narrative or Free Text Information**. Once you select the Narrative or Free Text Information, the Enable GEN AI checkbox is displayed.
- 7. Select the checkbox to enable GEN AI. A confirmation message is displayed.

# **SWIFT Configuration Admin**

To configure the message and screening parameters, follow these steps:

- Navigate to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service landing page.
- Click Transaction Filtering Administration. The Transaction Filtering Administration page is displayed.
- Click SWIFT Configuration Admin. The Message and Screening Configurations tab is displayed.

### ① Note

The following screens are the same for the Fedwire and SWIFT message parameters.

This tab has the following windows:

- Message and Screening Configurations Window
- <Message Type> Subfield Level Configuration Window
- <a href="Message Type">Message Type</a> Screening Configuration Window
- <<u>Message Type> Other Field/Subfield Configuration Window</u>

# 6.1 Message and Screening Configurations Window

This window allows you to edit the status, field names, and expressions of the different JSON parameters in the message.

In the Message Type Configuration field, select the SWIFT message category. All message definitions are SWIFT 2019 compliant.

Each message type has five blocks: Basic Header Block, Application Header Block, User Header Block, Text Block, and Trailer Block.

The first column lists all the SWIFT blocks and a list of fields within each block which follows SWIFT naming standards. In this field, if a part of the sequence has multiple formats, then while uploading the JSON for the message type, update the formats within [..] with unique identifiers. The other columns are:

- Status: This column mentions whether the field is Mandatory (M) or Optional (O).
- FieldName: This column describes the name of the given field as per SWIFT standards.
- **Expression**: This column depicts the field structure in terms of expression. For example, if the field is a data type, then the maximum length of the field is displayed.

To edit a parameter, click the parameter name. After you make the changes, click **Save**.



### 6.1.1 Adding or Updating a New Message Type

To add or update an existing message type, follow these steps:

- Click the Add/Update button. The Attachment Details window is displayed.
- Select the type of message that you want to add or update from the drop-down list.
- To upload an attachment, click Choose File. You can upload only one attachment at a time.



### (i) Note

This file must be of the format . json or .txt.

- Click Upload.
- Click Submit. The message is displayed in the following table as <Message Type draft>.

### 6.1.2 Configuring the References

To view and change the message reference or transaction reference, click Reference Configuration. Reference Configuration tab has the following fields:

- Message Identifier
- Transaction Reference
- Payment Account ID
  - Field
  - Field/Subfield Name

Any message which contains message references or transaction references, or both, must be configured. For the Message Reference field, a unique identifier must be configured at the message level for all message categories.

For the **Transaction Reference** field, a unique identifier must be configured at the transaction level only if applicable for the specific message category. For the Payment Account ID field, a unique identifier can be configured for each message type. You can enter multiple field values for **Payment Account ID** by clicking the plus icon.

# 6.2 < Message Type > Subfield Level Configuration Window

This window allows you to add a subfield to a field in the Message Type Configuration Window.

To add a subfield, provide the required values in the fields shown in the window and click Add icon. Enter values in the following fields:

Table 6-1 Fields in the <Message Type> Subfield Level Configuration Window

| Fields                 | Field Description  |
|------------------------|--|
| Expression Identifier  | Enter a unique identifier. It must begin with an alpha character and must not contain any spaces. This is a mandatory field. |
| Expression Name        | Enter a name for the expression. The name must be in capital letters. This is a mandatory field.                             |
| Expression Description | Enter a description for the Expression. This is a mandatory field.   |



Table 6-1 (Cont.) Fields in the <Message Type> Subfield Level Configuration Window

| Fields                                       | Field Description  |
|--|--|
| Field  | This field displays a complete list of fields in the drop-down for the given message type. Select the field from this drop-down field to configure the expression.   |
| Field/Subfield Name                          | This field displays the respective field name or subfield options for the field that was previously selected. Select the subfield from the drop-down list.   |
| Subfield Expression<br>Format and Occurrence | This field is populated when the Field is selected. Select an expression as it as or an element from that expression. You can also enter the number of occurrences for the expression within that message. By default, it is always 1. |
| Add button                                   | To add a subfield, provide the required values in the fields shown above and click Add icon.   |
| Update button                                | To update an existing subfield, click the name of the subfield. After you make the changes, click Update icon.   |
| Remove button                                | To remove an existing subfield, click the name of the subfield and click Remove icon.  |
| Clear button                                 | To clear the data in these fields, click Clear icon.   |

- 2. To update an existing subfield, click the name of the subfield. After you make the changes, click **Update**.
- 3. To remove an existing subfield, click the name of the subfield and click **Remove**.
- To clear the data in these fields, click Clear.

You can configure the subfield in two ways:

• By configuring the subfield level data within the option expression: Do this if you want to configure specific data within the expression.

For example, if field 57 has four options A, B, C, and D in MT103 message but you want to configure BIC (Identifier Code) from option A:

You must enter the names in the **Subfield Expression Identifier**, **Subfield Name**, and **Subfield Description fields**.

```
Option A:
[/1!a][/34x] (Party Identifier)
4!a2!a2!c[3!c] (Identifier Code)
```

By configuring the element level data within the subfield expression: Do this if you
want to further configure any data out of the subfield. In this example, if you want to
configure the country code for field 57, then you can configure 2!a from Identifier Code
expression as a country code by giving unique names in the Subfield Expression
Identifier, Subfield Name, and Subfield Description fields.

```
Option A:
[/1!a][/34x] (Party Identifier)
4!a 2!a 2!c[3!c] (Identifier Code)
```



# 6.3 < Message Type> Screening Configuration Window

This window allows you to add, update, remove, and enable or disable a web service. The window allows you to select the messages for which you want to use GenAI based keyword extraction for fuzzy screening of narrative fields.

To view a web service, enter values in the following fields:

| Fields               | Field Description   |  |
|----------------------|---|--|
| Screening WebService | Select a screening web service from the drop-down list. This field lists all the supported matching web services in the <b>Transaction Filtering</b> application. The following web services are available:  Identifier  Country and City  Goods Screening  Name and Address  Narrative or Free Text Information  Port Screening  The fields for all web services except Goods Screening are as shown here. |  |
| Enable Gen Al        | GenAl based keyword e   |  |
|                      | ORACLE Configuration Screen   |  |
|                      | Message and Screening Configurations  |  |
|                      | MT416 Screening Configuration   | Screening webservice: Narrative or Free Text Information |
|                      |   |  |

|                      | MT416 Screening Configuration                                     | Scr               | eening webser   | rvice: Narrative or Free Text Infor | mation •     |     |
|----------------------|---|-------------------|-----------------|-------------------------------------|--------------|-----|
|                      | Expression (ID-Name):   | •                 | (OR)            | Field:                              |              | ₩   |
|                      | Enable:   | •                 |                 | Message Direction:                  |              | •   |
|                      | Business Domain: All  | v                 |                 | Enable GEN AI :                     |              |     |
|                      |   |                   |                 |                                     |              |     |
|                      |   |                   |                 |                                     |              |     |
|                      | Once you select Narrative checkbox is displayed. Se               |                   |                 | ,                                   | EN AI        |     |
| Expression (ID-Name) | Select an expression iden values are populated in th              | ,                 |                 |                                     | entifier, th | ne  |
| Field                | Select the field name.  |                   |                 |                                     |              |     |
| Field/Subfield Name  | Select the subfield name.   | This displays the | expres          | ssion.                              |              |     |
| Enable               | Select Yes to enable the v  | veb service. Sele | ect <b>No</b> t | o disable the we                    | eb service   | е.  |
| Message Direction    | Select <b>INBOUND(o)</b> and <b>o</b> from the drop-down list. If | • • •             |                 | •                                   | •            | ent |

messages, select inbound, else select outbound. If that field must be

screened for both inbound and outbound, then select ANY.



Table 6-2 (Cont.) Fields in the <Message Type> Screening Configuration Window

| Fields             | Field Description  |
|--------------------|--|
| Jurisdiction       | Select <b>All</b> to apply the Webservice for all jurisdictions or select the specific jurisdiction to apply the webservice for a specific jurisdiction. |
|                    | Use the kdd_jrsdcn table to configure the jurisdiction values. It has the following columns:   |
|                    | JRSDCN_CD: Values must be unique.  JRSDCN_NM_Attual invited integrance.  JRSDCN_NM_Attual invited integrance.  |
|                    | <ul> <li>JRSDCN_NM: Actual jurisdiction name.</li> </ul>   |
|                    | <ul> <li>JRSDCN_DSPLY_NM: Jurisdiction name displayed in the Message and<br/>Configurations screen.</li> </ul>   |
|                    | <ul> <li>JRSDCN_DESC_TX: Optional field to adbusinesd descriptions for the<br/>jurisdictions.</li> </ul>   |
| Add button         | To add a web service, provide the required values in the fields shown above and click <b>Add</b> icon.   |
| Update button      | To update a web service, select the web service that you want to update and click <b>Update</b> icon.  |
| Remove button      | To remove a web service, select the web service that you want to remove and click <b>Remove</b> icon.  |
| Enable All button  | To enable all web services, click <b>Enable All</b> icon.  |
| Disable All button | To disable all web services, click <b>Disable All</b> icon.  |

The fields you can use to configure the Goods web service are different from the fields you can use to configure the other web services. These fields are as shown:

Table 6-3 Fields in the Goods Web Service Window

| Fields                | Field Description  |
|-----------------------|--|
| Fields                | Field Description  |
| Expression Identifier | Select the Expression for the good.  |
| Tag                   | Select the tag related to the good. Based on the tag selected, the field name is populated.  |
| Field Name            | The field name is populated based on the tag selected.   |
| Message Direction     | Select INBOUND(o) and OUTBOUND(i) based on the screening requirement from the drop-down list. If a field must be screened only for incoming messages, select inbound, else select outbound. If that field must be screened for both inbound and outbound, then select ANY. |
| Enable                | Select <b>Yes</b> to enable the message in a direction. Select <b>No</b> to disable the message in a direction.  |
| Add button            | To add a web service, provide the required values in the fields shown above and click <b>Add</b> icon.   |
| Update button         | To update a web service, select the web service that you want to update and click <b>Update</b> icon.  |
| Remove button         | To remove a web service, select the web service that you want to remove and click <b>Remove</b> icon.  |
| Enable All button     | To enable all web services, click <b>Enable All</b> icon.  |
| Disable All button    | To disable all web services, click <b>Disable All</b> icon.  |

### 6.3.1 Enabling or Disabling a Web Service

By default, every web service is enabled. You can change the message configuration by disabling a web service. When you do this, the selected web service is not evaluated. To



enable or disable one or more web services, replace the [WEBSERVICE\_IDS] placeholder with the corresponding web service ID. The web services and the corresponding IDs are shown here:

Table 6-4 Web Services in Transaction Filtering

| Web Service                           | Web Service ID                     |
|---------------------------------------|------------------------------------|
| Name and Address                      | Name and Address                   |
| BIC                                   | BIC                                |
| Country and City                      | Country and City                   |
| Narrative or Free Text<br>Information | Narrative or Free Text Information |
| Port Screening                        | Port Screening                     |
| Goods Screening                       | Goods Screening                    |

To disable all the web services, replace the [WEBSERVICE\_IDS] placeholder with 1, 2, 3, 4, 5, 6 in the following command:

UPDATE FSI\_RT\_MATCH\_SERVICE SET F\_ENABLED = 'N' WHERE N\_WEBSERVICE\_ID IN
([WEBSERVICE\_IDS])

To enable all the web services, change N to Y.

### 6.3.2 Updating and Removing a Web Service

To update an existing web service, click the name of the web service. The fields are populated with the web service parameters. After you make the changes, click **Update**.

To remove an existing web service, click the name of the web service and click **Remove**.

### 6.3.3 Populating Data for the Trade Goods and Trade Port Web Services

Data for the Trade goods and Trade port web services are taken from a reference table. To populate data for these web services, do this:

- 1. In the EDQ Director menu, go to the Watch List Management project.
- 2. Right-click on the Reference Data Refresh job.
- 3. Click Run. Provide a unique run label and run profile.
- 4. When you run this job, the port and goods reference data are refreshed at the same time.
- Go to the Transaction Filtering project.
- Right-click on the MAIN-Shutdown Real-time Screening job to shut down all web services.
- 7. Click Run.
- 8. Right-click on the MAIN job to restart all web services.
- Click Run.



# 6.4 < Message Type > Other Field/Subfield Configuration Window

This window allows you to update the other fields which are required for the application. It displays the list of fixed business data/names for the required fields to run the system for any given message type. You can select a business data value to mention the source for a given message type.

To update the parameter, click the parameter name. The fields are populated with the field parameters. The following fields are displayed in this window:

Table 6-5 Fields in the <Message Type> Other Field/Subfield Configuration Window

| Fields                | Field Description  |
|-----------------------|--|
| Generic Business Data | This field displays the Business Name of the record that is selected. It is mandatory to configure this field.   |
|                       | If the message contains one or more of the B, C, D, or E sequences, you must configure the field with the first tag of the sequence according to the SWIFT standard.   |
| Message Direction     | Select INBOUND(o) and OUTBOUND(i) based on the screening requirement from the drop-down list. If a field must be screened only for incoming messages, select inbound, else select outbound. If that field must be screened for both inbound and outbound, then select ANY. |
| Expression (ID-Name)  | Select an expression identifier. When you select an expression identifier, the values are populated in the <b>Field</b> and <b>Field/Subfield Name</b> fields.   |
| Field                 | Select the field name.   |
| Field/Subfield Name   | Select the Subfield Name. This displays the Expression.  |
| Add button            | To add a web service, provide the required values in the fields shown above and click <b>Add</b> icon.   |
| Update button         | To update a web service, select the web service that you want to update and click <b>Update</b> icon.  |
| Remove button         | To remove a web service, select the web service that you want to remove and click <b>Remove</b> icon.  |

After you make the changes, click **Update**.

# **FED Configuration Admin**

To configure the message and screening parameters, follow these steps:

- Navigate to the Oracle Financial Services Crime and Compliance Management Anti Money Laundering Cloud Service landing page.
- Click Transaction Filtering Administration. The Transaction Filtering Administration page is displayed.
- Click FED Configuration Admin. The Message and Screening Configurations tab is displayed.

### ① Note

The following screens are the same for the Fedwire and SWIFT message parameters.

This tab has the following windows:

- Message Type Configuration Window
- <a href="Message Type">Message Type</a> Subfield Level Configuration Window
- <a href="Message Type">Message Type</a> Screening Configuration Window
- <Message Type> Other Field/Subfield Configuration Window

### 7.1 Message Type Configuration Window

This window allows you to edit the status, field names, and expressions of the different JSON parameters in the message.

In the Message Type Configuration field, select the Fedwire message category.

Each message type has a Text Block. The fields in the Text Block may change depending on the message type.

The first column lists all the message identifiers for the Fedwire message category. The other columns are:

- Status: This column mentions whether the field is Mandatory (M) or Optional (O).
- **FieldName**: This column describes the name of the given field as per Fedwire standards.
- **Expression**: This column depicts the field structure in terms of expression. For example, if the field is a data type, then the maximum length of the field is displayed.

To edit a parameter, click the parameter name. After you make the changes, click Save.

### 7.1.1 Adding or Updating a New Message Type

To add or update an existing message type, follow these steps:



- 1. Click the Add/Update button. The Attachment Details window is displayed.
- 2. Select the type of message that you want to add or update from the drop-down list.
- 3. To upload an attachment, click Choose File. You can upload only one attachment at a time.

### Note

This file must be of the format . json or .txt.

- 4. Click Upload.
- 5. Click Submit. The message is displayed in the following table as <Message Type draft>.

### 7.1.2 Configuring Message and Transaction References

Any message which contains message references or transaction references, or both, must be configured. To view and change the message reference or transaction reference, click **Reference Configuration**.

For the **Message Reference** field, a unique identifier must be configured at the message level for all message categories. For the Transaction Reference field, a unique identifier must be configured at the transaction level only if applicable for the specific message category.

### 7.2 < Message Type > Subfield Level Configuration Window

This window allows you to add a subfield to a field in the **Message Type Configuration** Window.

To add a subfield, provide the required values in the fields shown in the window and click
 Add icon. Enter values in the following fields:

Table 7-1 Fields in the <Message Type> Subfield Level Configuration Window

| Fields                                       | Field Description  |
|--|--|
| Expression Identifier                        | Enter a unique identifier. It must begin with an alpha character and must not contain any spaces. This is a mandatory field.   |
| Expression Name                              | Enter a name for the expression. The name must be in capital letters. This is a mandatory field.   |
| Expression Description                       | Enter a description for the Expression. This is a mandatory field.   |
| Field  | This field displays a complete list of fields in the drop-down for the given message type. Select the field from this drop-down field to configure the expression.   |
| Field/Subfield Name                          | This field displays the respective field name or subfield options for the field that was previously selected. Select the subfield from the drop-down list.   |
| Subfield Expression<br>Format and Occurrence | This field is populated when the Field is selected. Select an expression as it as or an element from that expression. You can also enter the number of occurrences for the expression within that message. By default, it is always 1. |
| Add button                                   | To add a subfield, provide the required values in the fields shown above and click <b>Add</b> icon.  |
| Update button                                | To update an existing subfield, click the name of the subfield. After you make the changes, click <b>Update</b> icon.  |
| Remove button                                | To remove an existing subfield, click the name of the subfield and click <b>Remove</b> icon.   |



Table 7-1 (Cont.) Fields in the <Message Type> Subfield Level Configuration Window

| Fields       | Field Description                                    |
|--------------|--|
| Clear button | To clear the data in these fields, click Clear icon. |

You can configure the subfield in two ways:

• By configuring the subfield level data within the option expression: Do this if you want to configure specific data within the expression.

For example, if 1100 has four options A, B, C, and D in the FDBTR1002 message but you want to configure BIC (Identifier Code) from option A:

You must enter the names in the **Subfield Expression Identifier**, **Subfield Name**, and **Subfield Description fields**.

```
Option A:
[/1!a][/34x] (Party Identifier)
4!a2!a2!c[3!c] (Identifier Code)
```

By configuring the element level data within the subfield expression: Do this if you
want to further configure any data out of the subfield. In this example, if you want to
configure the country code for field 57, then you can configure 2!a from Identifier Code
expression as a country code by giving unique names in the Subfield Expression
Identifier, Subfield Name, and Subfield Description fields.

```
Option A:
[/1!a][/34x] (Party Identifier)
4!a 2!a 2!c[3!c] (Identifier Code)
```

### 7.3 < Message Type> Screening Configuration Window

This window allows you to add, update, remove, and enable or disable a web service.

To view a web service, enter values in the following fields:

Table 7-2 Fields in the <Message Type> Screening Configuration Window

| Fields               | Field Description   |
|----------------------|---|
| Screening WebService | Select a screening web service from the drop-down list. This field lists all the supported matching web services in the <b>Transaction Filtering</b> application. The following web services are available:  BIC  Country and City  Goods Screening  Name and Address  Narrative or Free Text Information  Port Screening |
|                      | The fields for all web services except Goods Screening are as shown here.   |
| Expression (ID-Name) | Select an expression identifier. When you select an expression identifier, the values are populated in the Field and Field/Subfield Name fields.  |
| Field                | Select the field name.  |
| Field/Subfield Name  | Select the subfield name. This displays the expression.   |



Table 7-2 (Cont.) Fields in the <Message Type> Screening Configuration Window

| Fields             | Field Description   |
|--------------------|---|
| Enable             | Select <b>Yes</b> to enable the web service. Select <b>No</b> to disable the web service.   |
| Message Direction  | Select INBOUND(o) and OUTBOUND(i) based on the screening requirement from the drop-down list. If a field must be screened only for incoming messages, select inbound, else select outbound. If that field must be screened for both inbound and outbound, then select ANY.  |
| Jurisdiction       | Select <b>All</b> to apply the Webservice for all jurisdictions or select the specific jurisdiction to apply the webservice for a specific jurisdiction.  |
|                    | <ul> <li>Use the kdd_jrsdcn table to configure the jurisdiction values. It has the following columns:</li> <li>JRSDCN_CD: Values must be unique.</li> <li>JRSDCN_NM: Actual jurisdiction name.</li> <li>JRSDCN_DSPLY_NM: Jurisdiction name displayed in the Message and Configurations screen.</li> <li>JRSDCN_DESC_TX: Optional field to adbusinesd descriptions for the jurisdictions.</li> </ul> |
| Add button         | To add a web service, provide the required values in the fields shown above and click <b>Add</b> icon.  |
| Update button      | To update a web service, select the web service that you want to update and click <b>Update</b> icon.   |
| Remove button      | To remove a web service, select the web service that you want to remove and click <b>Remove</b> icon.   |
| Enable All button  | To enable all web services, click <b>Enable All</b> icon.   |
| Disable All button | To disable all web services, click <b>Disable All</b> icon.   |

The fields you can use to configure the Goods web service are different from the fields you can use to configure the other web services. These fields are as shown:

Table 7-3 Fields in the Goods Web Service Window

| Fields                | Field Description  |
|-----------------------|--|
| Expression Identifier | Select the Expression for the good.  |
| Tag                   | Select the tag related to the good. Based on the tag selected, the field name is populated.  |
| Field Name            | The field name is populated based on the tag selected.   |
| Message Direction     | Select INBOUND(o) and OUTBOUND(i) based on the screening requirement from the drop-down list. If a field must be screened only for incoming messages, select inbound, else select outbound. If that field must be screened for both inbound and outbound, then select ANY. |
| Enable                | Select <b>Yes</b> to enable the message in a direction. Select <b>No</b> to disable the message in a direction.  |
| Add button            | To add a web service, provide the required values in the fields shown above and click <b>Add</b> icon.   |
| Update button         | To update a web service, select the web service that you want to update and click <b>Update</b> icon.  |
| Remove button         | To remove a web service, select the web service that you want to remove and click <b>Remove</b> icon.  |
| Enable All button     | To enable all web services, click <b>Enable All</b> icon.  |
| Disable All button    | To disable all web services, click <b>Disable All</b> icon.  |



### 7.3.1 Enabling or Disabling a Web Service

By default, every web service is enabled. You can change the message configuration by disabling a web service. When you do this, the selected web service is not evaluated. To enable or disable one or more web services, replace the [WEBSERVICE\_IDS] placeholder with the corresponding web service ID. The web services and the corresponding IDs are shown here:

Table 7-4 Web Services in Transaction Filtering

| Web Service ID                     |
|------------------------------------|
| Name and Address                   |
| BIC                                |
| Country and City                   |
| Narrative or Free Text Information |
| Port Screening                     |
| Goods Screening                    |
|                                    |

### 7.3.2 Updating and Removing a Web Service

To update an existing web service, click the name of the web service. The fields are populated with the web service parameters. After you make the changes, click **Update**.

To remove an existing web service, click the name of the web service and click **Remove**.

### 7.3.3 Populating Data for the Trade Goods and Trade Port Web Services

Data for the Trade goods and Trade port web services are taken from a reference table. To populate data for these web services, do this:

- In the EDQ Director menu, go to the Watch List Management project.
- 2. Right-click on the Reference Data Refresh job.
- 3. Click **Run**. Provide a unique run label and run profile.
- 4. When you run this job, the port and goods reference data are refreshed at the same time.
- 5. Go to the **Transaction Filtering** project.
- Right-click on the MAIN-Shutdown Real-time Screening job to shut down all web services.
- Click Run.
- Right-click on the MAIN job to restart all web services.
- 9. Click Run.

# 7.4 < Message Type > Other Field/Subfield Configuration Window

This window allows you to update the other fields which are required for the application. It displays the list of fixed business data/names for the required fields to run the system for any given message type. You can select a business data value to mention the source for a given message type.



To update the parameter, click the parameter name. The fields are populated with the field parameters. The following fields are displayed in this window:

Table 7-5 Fields in the <Message Type> Other Field/Subfield Configuration Window

| Field Description  |
|--|
| This field displays the Business Name of the record that is selected. It is mandatory to configure this field.   |
| If the message contains one or more of the B, C, D, or E sequences, you must configure the field with the first tag of the sequence according to the SWIFT standard.   |
| Select INBOUND(o) and OUTBOUND(i) based on the screening requirement from the drop-down list. If a field must be screened only for incoming messages, select inbound, else select outbound. If that field must be screened for both inbound and outbound, then select ANY. |
| Select an expression identifier. When you select an expression identifier, the values are populated in the <b>Field</b> and <b>Field/Subfield Name</b> fields.   |
| Select the field name.   |
| Select the Subfield Name. This displays the Expression.  |
| To add a web service, provide the required values in the fields shown above and click <b>Add</b> icon.   |
| To update a web service, select the web service that you want to update and click <b>Update</b> icon.  |
| To remove a web service, select the web service that you want to remove and click <b>Remove</b> icon.  |
|  |

After you make the changes, click **Update**.

# Run the ISO20022 Batch Screening

The ISO20022 transaction messages are processed in bulk using batches such as "ISO20022BatchScreening" and "ISOBatchScreeningToCaseManagement". Input Transaction Files are accepted in .json format and it can be either single json file with list of all transactions or multiple json files with list of transactions. Input transactions are processed, screened, and the feedback file is generated in the .json format.

For managing the above batches, refer <u>Transaction Filtering Screening Batches Details</u>.

### **Operations of ISO20022 Batches:**

- ISO20022BatchScreening This batch performs Download the Transaction files from Object Storage, Load the transactions into tables, Parse the raw messages, Transform data, Load transformed data to Matching Engine, Screen the Data against Watchlist and create Events, Generate Score, Make HOLD/CLEAN decision along with Exemption/Alert Suppression, Generate TF immediate Feedback and Upload to Object Storage, Highlight Raw Message, and Create TF Alerts.
- ISOBatchScreeningToCaseManagement This batch performs Generate Cases for created Alerts using Case Management Tasks and Update TF Feedback with Case Id.

## 8.1 Prerequisites

- Access the Object Storage Pre-authenticated URL form Admin Console. For more information see Access the Object Storage Pre-authenticated URL
- Setup the upload Transaction Files to Object Storage Utility.
  - a. In any Linux environment, create a new folder. E.g. ISO20022\_Batch\_InputData\_Upload\_Utility.
  - b. Change the directory inside the newly created folder.
  - **c.** Create a file named "cto.sh" and paste the below contents.

```
#!/bin/bash
filename='filename.txt'

n=1
tdate=$1

echo "Entered FIC MIS Date is: " $tdate
objstore="<<OBJECT_STORAGE_PAR_URL>>"

echo "Start Copy files to Object Store"
while read line; do
    trimmed_line=$(echo "$line" | sed 's/^[[:space:]]*//;s/
[[:space:]]*$//')
    #printf "line='%s'\n" $line
    #printf "trimmed_line='%s'\n" $trimmed_line
    sfile="@"$tdate"_"$trimmed_line".json"
    dfile=$objstore$tdate"_"$trimmed_line".json"
```



```
curl -X PUT --data-binary $sfile $dfile
    echo "File" $n ":" $sfile
    echo "File" $n ":" $dfile
    n=$((n+1))
done < $filename
    swfile="@"$tdate"_filewatcher.txt"
    dwfile=$objstore$tdate"_filewatcher.txt"
        curl -X PUT --data-binary $swfile $dwfile
        echo "File" $n ":" $swfile</pre>
```

Where <<OBJECT\_STORAGE\_PAR\_URL>> is the URL string obtained from Admin Console.

**d.** Create a file named "filename.txt" and add the file contents as follows: For Single input file:

```
RUN<<RUN_NUMBER>>_STG_TRANSACTIONS_ENTRY_1
```

Where <<RUN NUMBER>> is the positive number used for batch Run.

For Multiple input files:

```
RUN<RUN_NUMBER>>_STG_TRANSACTIONS_ENTRY_1
RUN<RUN_NUMBER>>_STG_TRANSACTIONS_ENTRY_2
RUN<RUN_NUMBER>>_STG_TRANSACTIONS_ENTRY_3
```

### Note

- i. The new line is mandatory at the end of last file name.
- ii. Default Batch accepts only STG\_TRANSACTIONS\_ENTRY file pattern. To change this, clone the following pipelines (Data Loading File Transfer Transaction Filtering and Load Transaction Filter Data) and change the input parameter "fileName" value in external service. Then Clone the associated jobs, attach the cloned pipeline and Save the job. Then, Change the Task Parameter "\$JOBNAME\$" value in two tasks "DataLoadingFileTransfer" and "TransFilterPipeline" respectively. Refer Pipeline Designer user guide.

### 8.2 Steps to Run a ISO20022 Batch

 Create a file named <<BATCH\_DATE>\_RUN<<RUN\_NUMBER>>\_ STG\_TRANSACTIONS\_ENTRY\_<<DIGIT>>.json.

### Where

- <BATCH\_DATE> is date used for "ISO20022BatchScreening" Batch run.
   Format:yyyyMMdd.
- <run\_number>is Any Positive number used for "ISO20022BatchScreening" Batch run.
- <DIGIT> is Any Positive number to represent the uniqueness of file.
   E.g.20241017\_RUN1\_STG\_TRANSACTIONS\_ENTRY\_1.json



### (i) Note

You can create multiple input json files for single batch run.

- 2. File contents must be in valid json format.
  - a. Example of Single Transaction in a file.

b. Example of Multiple Transactions in a file.

- Once the files are created, and place the input files inside the ISO20022\_Batch\_InputData\_Upload\_Utility folder.
- 4. Create an empty filewatcher text file named "<<BATCH\_DATE>>\_filewatcher.txt" inside the utility folder.

Where  $\mbox{\tt BATCH\_DATE}\mbox{\tt }$  is date used for "ISO20022BatchScreening" Batch run. Format:yyyyMMdd.



### ① Note


- **a.** The File Watcher text file with corresponding batch date is mandatory for the batch to run.
- If any input files created for a new date, filewatcher should also be created with same date.
- 5. Add the prefix name of input json files in filename.txt. Refer to the Prerequisties section to add the file name prefixes.
- 6. To upload the input data files to Object storage, Open the terminal, and run ./cto.sh <<BATCH\_DATE>>

For Example: ./cto.sh 20241017

### Note

- a. The cto.sh file contains Object Storage PAR URL as a variable "object". This URL get refreshed every day in admin console. Use the latest Object Storage PAR URL from admin console using Access the Object Storage Preauthenticated URL
  Access the Object Storage Pre-authenticated URL.
- 7. Once the input file upload is successful, Open Application URL and Navigate to **Batch Administration>Scheduler**.
- 8. In the Schedule Service Screen, click 'Schedule Batch' Navigation and under Execute Tab, then select the Batch as "ISO20022BatchScreening".
- 9. Click **Edit Parameters** button. The Edit Dynamic Params Dialog appears.

Figure 8-1 Edit Parameters

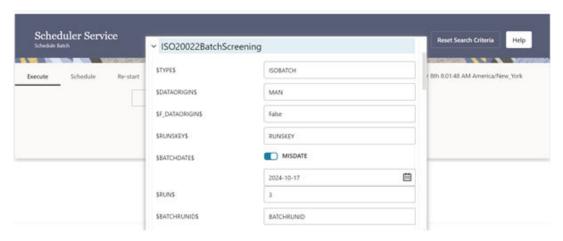

- **10.** Under the Batch Parameters, for Param \$BATCHDATE\$, enable MISDATE and select the date as <<BATCH DATE>> which is given in the input file name.
- 11. For Param \$RUN\$, enter the <<RUN\_NUMBER>> which is given in input file name.
- 12. Click Save.
- **13.** To run the batch, click the **Execute** button.



- 14. A confirmation popup appears. Click the Monitor button to monitor the batch.
- Once the batch is successful, call the following API with appropriate headers to get the download URL.

GET <<BASE\_URL>>/feedback-service/iso20022-batch/getFeedbackParURL?
runNumber=<<RUN\_NUMBER>>&batchDate=<<BATCH\_DATE>>

Refer API Documentation for More Information.

### (i) Note

The Download URL expiry date is 15 days. If any expiry happens, use the Following API to get the new Download URL.

POST <<BASE\_URL>>/feedback-service/iso20022-batch/uploadFeedbackToObjectStorage?runNumber=<<RUN\_NUMBER>>&batchDate=<<BATCH\_DATE>>

- **16.** Using the URL, download the immediate feedback zip file which contains json file(s) with content as transaction token, input data, and feedback data for each transaction.
- 17. Then, navigate to Schedule Batch and under Execute tab, select the batch as "ISOBatchScreeningToCaseManagement".

### (i) Note

- **a.** Make sure the "\$DATAORIGIN\$" Batch Parameter used is same in both the batches.
- b. As a pre-requisite for ISOBatchScreeningToCaseManagement Batch, "Maintenance" batch must be executed once in a setup for corresponding "\$DATAORIGIN\$" before triggering the above batch. It is a one-time activity in the application.
- 18. Then, click Execute.
- 19. Click Monitor to monitor the batch.
- 20. Once the batch is successful, cases are generated for given transactions.
- 21. Use the Following Feedback API to get the feedback with case Id or to get the final feedback.

GET <<BASE\_URL>>/feedback-service/Feedback/findByID?
messageType=3&transactionToken=<<TRANSACTION\_TOKEN>>
Where <TRANSACTION\_TOKEN>> - It can be obtained in immediate Feedback json file for each transaction.

Refer API Documentation for More Information.

Table 8-1 Task Details for ISO20022BatchScreening

| Task ID | Task Name     | Task Description |
|---------|---------------|------------------|
| Task1   | StartDataLoad | Starts the Batch |



Table 8-1 (Cont.) Task Details for ISO20022BatchScreening

| Task ID | Task Name                 | Task Description  |
|---------|---------------------------|---|
| Task2   | DataLoadingFileTransfer   | Downloads Input Files from the Object Storage and Transfers it to the FSS (File Storage Service) location.                                      |
| Task3   | DataLoadingFileScanner    | Scans the files in the FSS location for virus detection.  |
| Task4   | TransFilterPipeline       | Reads the data from json files in<br>the FSS location and insert the<br>data into the batch repository<br>and the batch transaction<br>tables.  |
| Task5   | TransactionInputProcess   | Fetches the input data from the batch transaction table, then processes it and insert them into pre-processing tables.                          |
| Task6   | ISO20022DataTransform     | Transforms the input data for provided rules under each webservice and persists them into transformed table.                                    |
| Task7   | TransactionSourceDataLoad | Loads the transformed data as indexes into Matching Engine.   |
| Task8   | ISO20022BulkMatching      | Performs screening of data,<br>scoring, decision making,<br>generating Immediate<br>Feedback, highlighting Raw<br>data, and Creating TF Alerts. |
| Task9   | GatherStats               | Gathers statistics for the loaded tables.   |
| Task10  | EndDataLoad               | Ends the Batch.   |

### Note

- a. Both batches must be run successfully, one after the other.
- **b.** If the batch run fails because of the server down issue, you must try to restart the batch. It will re-start from the failed task.
- c. Re-run option will create a new run for the batch with new batch run Id.

# 8.3 Purge Batches Available for ISO20022 Batch

Purge Batches are used to delete the data for particular batch run ID if required in case of any batch failures.

For more information see the <u>Purge Batch details</u> topic in the Pipleline Designer guide.

### 1. PurgelSO20022BatchTables

Click **Edit Parameters**, enter Task Parameter "**\$FCCMBATCHRUNID\$**" with corresponding Batch Run Id for "**ISO20022BatchScreening**", then save and execute the Batch.

### 2. PurgeCMTables



Click Edit Parameters, enter Task Parameter "\$FCCMBATCHRUNID\$" with corresponding Batch Run Id for "ISOBatchScreeningToCaseManagement", then save and execute the Batch.



### (i) Note

Make sure the "\$DATAORIGIN\$" batch param used here is same as in ISO20022 Batches.

# Run the NACHA Batch Screening

The NACHA transaction messages can be processed in bulk using batches such as "NACHABatchScreening" and "NACHABatchScreeningToCaseManagement". Input Transaction Files are accepted in the .json format and it can be either single json file with list of all transactions or multiple json files with list of transactions. Input transactions will be processed, screened and feedback file will be generated in the .json format.

For managing the above batches, refer <u>Transaction Filtering Screening Batches Details</u>.

### **Operations of NACHA Batches:**

- NACHABatchScreening This batch performs Download the Transaction files from Object Storage, Load the transactions into tables, Parse the raw messages, Transform data, Load transformed data to Matching Engine, Screen the Data against Watchlist and create Events, Generate Score, Make HOLD/CLEAN decision along with Exemption/Alert Suppression, Generate TF immediate Feedback and Upload to Object Storage, Highlight Raw Message, and Create TF Alerts.
- NACHABatchScreeningToCaseManagement This batch performs Generate Cases for created Alerts using Case Management Tasks and Update TF Feedback with Case Id.

## 9.1 Prerequisites

- Access the Object Storage Pre-authenticated URL form Admin Console. For more information see <u>Access the Object Storage Pre-authenticated URL</u>.
- 2. Setup the upload Transaction Files to Object Storage Utility.
  - In any Linux environment, create a new folder. E.g. NACHA\_Batch\_InputData\_Upload\_Utility.
  - b. Change the directory inside the newly created folder.
  - c. Create a file named "cto.sh" and paste the below contents.

```
#!/bin/bash
filename='filename.txt'

n=1
tdate=$1

echo "Entered FIC MIS Date is: " $tdate
objstore="<<OBJECT_STORAGE_PAR_URL>>"

echo "Start Copy files to Object Store"
while read line; do
    trimmed_line=$(echo "$line" | sed 's/^[[:space:]]*//;s/
[[:space:]]*$/')
    #printf "line='%s'\n" $line
    #printf "trimmed_line='%s'\n" $trimmed_line
    sfile="@"$tdate"_"$trimmed_line".json"
    dfile=$objstore$tdate"_"$trimmed_line".json"
```



```
curl -X PUT --data-binary $sfile $dfile
    echo "File" $n ":" $sfile
    echo "File" $n ":" $dfile
    n=$((n+1))
done < $filename
    swfile="@"$tdate"_filewatcher.txt"
    dwfile=$objstore$tdate"_filewatcher.txt"
        curl -X PUT --data-binary $swfile $dwfile
        echo "File" $n ":" $swfile</pre>
```

Where <<OBJECT\_STORAGE\_PAR\_URL>> is the URL string obtained from Admin Console.

**d.** Create a file named "filename.txt" and add the file contents as follows: For Single input file:

```
RUN<<RUN_NUMBER>>_ACH_STG_TRANSACTIONS_ENTRY_1
```

Where <<RUN NUMBER>> is the positive number used for batch Run.

For Multiple input files:

```
RUN<RUN_NUMBER>>_ACH_STG_TRANSACTIONS_ENTRY_1
RUN<RUN_NUMBER>>_ACH_STG_TRANSACTIONS_ENTRY_2
RUN<RUN_NUMBER>>_ACH_STG_TRANSACTIONS_ENTRY_3
```

### (i) Note

- i. The new line is mandatory at the end of last file name.
- ii. Default Batch accepts only STG\_TRANSACTIONS\_ENTRY file pattern. To change this, clone the following pipelines (Nacha Data Loading File Transfer and Nacha Load Transaction Filter Data) and change the input parameter "fileName" value in external service. Then Clone the associated jobs, attach the cloned pipeline and Save the job. Then, Change the Task Parameter "\$JOBNAME\$" value in two tasks "NachaDataLoadingFileTransfer" and "NachaLoadTransactionFilterData" respectively. Refer Pipeline Designer user guide.

### 9.2 Steps to Run a NACHA Batch

1. Create a file named

<<BATCH\_DATE>\_RUN<<RUN\_NUMBER>>\_ACH\_STG\_TRANSACTIONS\_ENTRY\_<<DIGIT>>.json.

#### Where

- <BATCH\_DATE> is date used for "NACHABatchScreening" Batch run. Format:yyyyMMdd.
- RUN\_NUMBER> is Any Positive number used for "NACHABatchScreening" Batch run.
- <DIGIT> is Any Positive number to represent the uniqueness of file.
   E.g.20251017\_RUN1\_ ACH\_STG\_TRANSACTIONS\_ENTRY\_1.json



### (i) Note

You can create multiple input json files for single batch run.

- 2. File contents must be in valid json format.
  - a. Example of Single Transaction in a file.

b. Example of Multiple Transactions in a file.

- Once the files are created, and place the input files inside the NACHA\_Batch\_InputData\_Upload\_Utility folder.
- 4. Create an empty filewatcher text file named "<<BATCH\_DATE>>\_filewatcher.txt" inside the utility folder.

Where <BATCH\_DATE> is date used for "NACHABatchScreening" Batch run. Format:yyyyMMdd.



### ① Note


- **a.** The File Watcher text file with corresponding batch date is mandatory for the batch to run.
- **b.** If any input files created for a new date, filewatcher should also be created with same date.
- **5.** Add the prefix name of input json files in filename.txt. Refer to the <u>Prerequisties</u> section to add the file name prefixes.
- 6. To upload the input data files to Object storage, Open the terminal, and run ./cto.sh <<BATCH DATE>>

For Example: ./cto.sh 20251017

### Note

- a. The **cto.sh** file contains Object Storage PAR URL as a variable "objstore". This URL get refreshed every day in admin console. Use the latest Object Storage PAR URL from admin console using Access the Object Storage Preauthenticated URLAccess the Object Storage Pre-authenticated URL.
- Once the input file upload is successful, Open Application URL and Navigate to Batch Administration>Scheduler.
- 8. In the Schedule Service Screen, click 'Schedule Batch' Navigation and under Execute Tab, then select the Batch as "NACHABatchScreening".
- 9. Click Edit Parameters button. The Edit Dynamic Params Dialog appears.



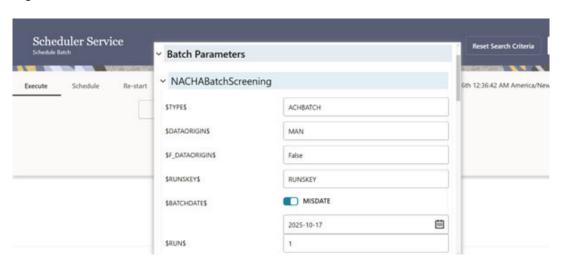

- 10. Under the Batch Parameters, for Param \$BATCHDATE\$, enable MISDATE and select the date as <<BATCH DATE>> which is given in the input file name.
- 11. For Param \$RUN\$, enter the <<RUN\_NUMBER>> which is given in input file name.
- 12. Click Save.



- 13. To run the batch, click the **Execute** button.
- 14. A confirmation pop-up appears. Click the **Monitor** button to monitor the batch.
- 15. Once the batch is successful, call the following API with appropriate headers to get the download URL.

GGET <<BASE\_URL>>/feedback-service/batch/getFeedbackParURL? runNumber = < < RUN NUMBER >> & batchDate = < < BATCH DATE >> & batchType = ACHBATCH

Refer API Documentation for More Information.

### (i) Note

The Download URL expiry date is 15 days. If any expiry happens, use the Following API to get the new Download URL.

POST <<BASE URL>>/feedback-service/batch/ uploadFeedbackToObjectStorage? runNumber=<<RUN\_NUMBER>>&batchDate=<<BATCH\_DATE>>&batchType=ACHBATCH

- 16. Using the URL, download the immediate feedback zip file which contains ison file(s) with content as transaction token, input data, and feedback data for each transaction.
- 17. Then, navigate to Schedule Batch and under Execute tab, select the batch as "NACHABatchScreeningToCaseManagement".

### (i) Note

- a. Make sure the "\$DATAORIGIN\$" Batch Parameter used is same in both the batches.
- b. As a pre-requisite for NACHABatchScreeningToCaseManagement Batch, "Maintenance" batch must be executed once in a setup for corresponding "\$DATAORIGIN\$" before triggering the above batch. It is a one-time activity in the application.
- 18. Then, click Execute.
- 19. Click **Monitor** to monitor the batch.
- 20. Once the batch is successful, cases are generated for given transactions.
- 21. Use the Following Feedback API to get the feedback with case Id or to get the final feedback.

GET <<BASE URL>>/feedback-service/Feedback/findByID? messageType=3&transactionToken=<<TRANSACTION\_TOKEN>> Where <TRANSACTION\_TOKEN>> - It can be obtained in immediate Feedback json file for each transaction.

Refer API Documentation for More Information.

Table 9-1 Task Details for NACHABatchScreening

| Task ID | Task Name     | Task Description |
|---------|---------------|------------------|
| Task1   | StartDataLoad | Starts the Batch |



Table 9-1 (Cont.) Task Details for NACHABatchScreening

| Task ID | Task Name                          | Task Description  |
|---------|------------------------------------|---|
| Task2   | NachaDataLoadingFileTransfer       | Downloads Input Files from the Object Storage and Transfers it to the FSS (File Storage Service) location.                                      |
| Task3   | NachaDataLoadingFileScanner        | Scans the files in the FSS location for virus detection.  |
| Task4   | NachaLoadTransactionFilterDat<br>a | Reads the data from json files in<br>the FSS location and insert the<br>data into the batch repository<br>and the batch transaction<br>tables.  |
| Task5   | NachaTransactionInputProcess       | Fetches the input data from the batch transaction table, then processes it and insert them into pre-processing tables.                          |
| Task6   | NachaDataTransform                 | Transforms the input data for provided rules under each webservice and persists them into transformed table.                                    |
| Task7   | NachaSourceDataLoad                | Loads the transformed data as indexes into Matching Engine.   |
| Task8   | NachaBulkMatching                  | Performs screening of data,<br>scoring, decision making,<br>generating Immediate<br>Feedback, highlighting Raw<br>data, and Creating TF Alerts. |
| Task9   | EndDataLoad                        | Ends the Batch.   |

### Note

- Both batches must be run successfully, one after the other.
- **b.** If the batch run fails because of the server down issue, you must try to restart the batch. It will re-start from the failed task.
- c. Re-run option will create a new run for the batch with new batch run Id.

# 9.3 Purge Batches Available for NACHA Batch

Purge Batches are used to delete the data for particular batch run ID if required in case of any batch failures.

For more information see the Purge Batch details topic in the Pipleline Designer guide.

### 1. PurgeNachaBatchTables

Click **Edit Parameters**, enter Task Parameter "**\$FCCMBATCHRUNID\$**" with corresponding Batch Run Id for "**NACHABatchScreening**", then save and execute the Batch.

### 2. PurgeCMTables



Click Edit Parameters, enter Task Parameter "\$FCCMBATCHRUNID\$" with corresponding Batch Run Id for "NACHBatchScreeningToCaseManagement", then save and execute the Batch.



### (i) Note

Make sure the "\$DATAORIGIN\$" batch param used here is same as in NACHA Batches.



# Message Categories and Message Types

A user of the Transaction Filtering application can use the following message categories:

- SWIFT Message Types
- ISO20022 Message Types
- Fedwire Message Types
- NACHA Message Types

Each message category has different message types defined. The following tables list the message categories and associated message types.

# A.1 SWIFT Message Types

For the SWIFT message category, the message types are out-of-the-box. The unsupported message types must to added using the SWIFT Administration tool.

Table A-1 SWIFT Message Types

| No | Message<br>Type | No | Message<br>Type | No | Message<br>Type | No | Message<br>Type |
|----|-----------------|----|-----------------|----|-----------------|----|-----------------|
| 1  | MT101           | 2  | MT102           | 3  | MT103           | 4  | MT103STP        |
| 5  | MT104           | 6  | MT105           | 7  | MT107           | 8  | MT110           |
| 9  | MT111           | 10 | MT112           | 11 | MT190           | 12 | MT191           |
| 13 | MT192           | 14 | MT195           | 15 | MT196           | 16 | MT198           |
| 17 | MT199           | 18 | MT200           | 19 | MT201           | 20 | MT202           |
| 21 | MT202COV        | 22 | MT203           | 23 | MT204           | 24 | MT205           |
| 25 | MT205COV        | 26 | MT210           | 27 | MT290           | 28 | MT291           |
| 29 | MT292           | 30 | MT295           | 31 | MT296           | 32 | MT298           |
| 33 | MT299           | 34 | MT300           | 35 | MT304           | 36 | MT305           |
| 37 | MT306           | 38 | MT320           | 39 | MT321           | 40 | MT350           |
| 41 | MT362           | 42 | MT395           | 43 | MT396           | 44 | MT399           |
| 45 | MT400           | 46 | MT410           | 47 | MT412           | 48 | MT416           |
| 49 | MT420           | 50 | MT430           | 51 | MT455           | 52 | MT456           |
| 53 | MT490           | 54 | MT491           | 55 | MT492           | 56 | MT495           |
| 57 | MT496           | 58 | MT498           | 59 | MT499           | 60 | MT515           |
| 61 | MT516           | 62 | MT526           | 63 | MT536           | 64 | MT537           |
| 65 | MT540           | 66 | MT541           | 67 | MT542           | 68 | MT543           |
| 69 | MT544           | 70 | MT545           | 71 | MT546           | 72 | MT547           |
| 73 | MT548           | 74 | MT564           | 75 | MT566           | 76 | MT568           |
| 77 | MT581           | 78 | MT590           | 79 | MT591           | 80 | MT592           |
| 81 | MT595           | 82 | MT596           | 83 | MT599           | 84 | MT604           |
| 85 | MT605           | 86 | MT606           | 87 | MT607           | 88 | MT608           |
| 89 | MT671           | 90 | MT695           | 91 | MT696           | 92 | MT699           |



Table A-1 (Cont.) SWIFT Message Types

| No  | Message<br>Type | No  | Message<br>Type | No  | Message<br>Type | No  | Message<br>Type |
|-----|-----------------|-----|-----------------|-----|-----------------|-----|-----------------|
| 93  | MT700           | 94  | MT701           | 95  | MT705           | 96  | MT707           |
| 97  | MT708           | 98  | MT710           | 99  | MT711           | 100 | MT720           |
| 101 | MT721           | 102 | MT730           | 103 | MT732           | 104 | MT734           |
| 105 | MT740           | 106 | MT742           | 107 | MT747           | 108 | MT750           |
| 109 | MT752           | 110 | MT754           | 111 | MT756           | 112 | MT759           |
| 113 | MT760           | 114 | MT765           | 115 | MT767           | 116 | MT768           |
| 117 | MT769           | 118 | MT790           | 119 | MT791           | 120 | MT792           |
| 121 | MT795           | 122 | MT796           | 123 | MT798           | 124 | MT799           |
| 125 | MT801           | 126 | MT802           | 127 | MT824           | 128 | MT890           |
| 129 | MT895           | 130 | MT896           | 131 | MT899           | 132 | MT900           |
| 133 | MT910           | 134 | MT940           | 135 | MT942           | 136 | MT950           |
| 137 | MT985           | 138 | MT986           | 139 | MT995           | 140 | MT996           |
| 141 | MT998           | 142 | MT999           |     |                 |     |                 |

# A.2 ISO20022 Message Types

For the ISO20022 message category, the following message types are the ready-to-use message types that you can use after you log in.

Table A-2 ISO20022 Message Types

| No | Message<br>Type     | No | Message<br>Type     | No | Message<br>Type     | No | Message<br>Type     |
|----|---------------------|----|---------------------|----|---------------------|----|---------------------|
| 1  | camt.026.00<br>1.09 | 2  | camt.027.00<br>1.09 | 3  | camt.028.00<br>1.11 | 4  | camt.029.00<br>1.11 |
| 5  | camt.031.00<br>1.06 | 6  | camt.032.00<br>1.04 | 7  | camt.033.00<br>1.06 | 8  | camt.038.00<br>1.04 |
| 9  | Camt.050.00<br>1.05 | 10 | camt.052.00<br>1.08 | 11 | camt.052.00<br>1.10 | 12 | camt.053.00<br>1.08 |
| 13 | camt.053.00<br>1.10 | 14 | camt.054.00<br>1.08 | 15 | camt.054.00<br>1.09 | 16 | camt.054.00<br>1.10 |
| 17 | camt.056.00<br>1.10 | 18 | camt.060.00<br>1.05 | 19 | camt.060.00<br>1.06 | 20 | camt.087.00<br>1.08 |
| 21 | pacs.002.001<br>.12 | 22 | Pacs.003.00<br>1.02 | 23 | pacs.003.001<br>.10 | 24 | Pacs.004.00<br>1.09 |
| 25 | pacs.004.001<br>.12 | 26 | Pacs.008.00<br>1.02 | 27 | Pacs.008.00<br>1.07 | 28 | Pacs.008.00<br>1.08 |
| 29 | pacs.008.001        | 30 | Pacs.009.00<br>1.08 | 31 | pacs.009.001<br>.10 | 32 | Pacs.010.00<br>1.03 |
| 33 | pacs.010.001<br>.05 | 34 | pacs.028.001<br>.05 | 35 | Pain.001.001<br>.08 | 36 | Pain.001.001<br>.09 |



# A.3 Fedwire Message Types

For the Fedwire message category, the following message types are the ready-to-use message types that you can use after you log in.

**Table A-3** Fedwire Message Types

| No | Message<br>Type | No | Message<br>Type | No | Message<br>Type | No | Message<br>Type |
|----|-----------------|----|-----------------|----|-----------------|----|-----------------|
| 1  | FDBTR1000       | 2  | FDBTR1002       | 3  | FDBTR1008       | 4  | FDBTR1600       |
| 5  | FDBTR1602       | 6  | FDCKS1600       | 7  | FDCKS1602       | 8  | FDCTP1000       |
| 9  | FDCTP1002       | 10 | FDCTP1008       | 11 | FDCTP1600       | 12 | FDCTP1602       |
| 13 | FDCTR1000       | 14 | FDCTR1002       | 15 | FDCTR1008       | 16 | FDCTR1600       |
| 17 | FDCTR1602       | 18 | FDDEP1600       | 19 | FDDEP1602       | 20 | FDFFR1600       |
| 21 | FDFFR1602       | 22 | FDFFS1600       | 23 | FDFFS1602       |    |                 |

# A.4 NACHA Message Types

For the NACHA message category, the following message types are the ready-to-use message types that you can use after you log in.

NACHA message types:

- CTX
- IAT
- RCK
- PPD
- CCD
- TEL
- WEB
- POP
- CIE
- ARC
- BOC