

Oracle Symphony

HTML5 Extensibility Developer Reference Guide



Release 19.9
G27867-01
September 2025

ORACLE®

G27867-01

Copyright ©, 2025, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this software or related documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface	vi
2 Introduction	1-1
3 API Basics	2-1
4 Code Samples	3-1
5 Cross-Platform Development	4-1
6 Rendering Technology	5-1
7 Raising a Dialog	6-1
In-Place HTML	6-1
Web Directory	6-2
8 Example Dialog HTML5	7-1
Simple Centered Dialog	7-1
Dialog Styling	7-2
Notes	7-4
Image References	7-5
Notes	7-7
9 Extensibility Callbacks	8-1

Extensibility Event	8-1
Extensibility Method	8-3
Context Method	8-4
Which to Use?	8-5
Results Status	8-6
10 System Keyboard	9-1
Displaying the Keyboard	9-1
Reacting to Keyboard Events	9-2
Ext App Handles All Key Presses	9-3
API Handles All Key Presses	9-3
API and Ext App Both Handle Key Presses	9-4
11 Barcode Scanning	10-1
12 JSON Serialization	11-1
13 What It Does Not Do	12-1
14 Web Directory Dialog Format	13-1
15 Debugging and Troubleshooting	14-1
Close Button	14-1
Debug Mode	14-2

Automatically Close Browser Window	14-5
Checking for API Existence	14-5
16 Sample Custom HTML5 Dialog Application	15-1
17 C# and SIM Differences	16-1
18 Feature Reference	17-1
POSDialogAPI.js	17-1
POSTheme.css	17-5
OpsContext	17-5
Support Classes	17-5
SIM	17-8

Preface

This release of Oracle Symphony includes an extensibility API for developing HTML5 dialogs that work across all platforms.

Purpose

This document is a developer reference guide for HTML5 user interface development for Oracle Symphony, including API details, reference material, code samples, and developer guidance.

Audience

This document is intended for developers who design custom dialogs for applications that extend core Oracle Symphony functionality.

Customer Support

To contact Oracle Customer Support, access the Customer Support Portal at:

<https://iccp.custhelp.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received and any associated log files
- Screenshots of each step you take

Documentation

Oracle Hospitality product documentation is available on the Oracle Help Center at <http://docs.oracle.com/en/industries/food-beverage/>

Revision History

Date	Description of Change
August 2025	Initial publication.

1

Introduction

Traditionally, Symphony extensibility (SIM/C#) had very primitive user interface functionality. The SIM Window feature is limited to form entry and C# has no built-in user interface functionality.

Microsoft Windows extensibility applications can use .NET forms/WPF to build complex user interfaces, but these technologies are not available for Linux or Android.

Simphony 19.2 provides an extensibility API for displaying complex dialogs across all platforms.

The technology to achieve this is HTML5 running isolated in an iframe or a separate browser instance. The benefits of this design are:

- HTML5 is a standard and familiar technology, with an industry wide population of HTML5 capable developers.
- HTML5 renders rich animated user interface experiences.
- HTML5 is platform independent. HTML5 dialogs render identically across Microsoft Windows, Android, and Linux.
- Isolating the HTML5 dialog gives the extensibility a safer sandbox to execute code.
- The renderer is CEF (Chromium Embedded Framework). This technology is standard for most browsers.

2

API Basics

The Custom Dialog API provides the following functionalities:

- Ext app (extensibility application) calls `OpsContext.ShowExtensibilityHtmlDialog ()` to show the dialog window.
- The HTML5 passes in as a string or a compressed archive.
- The HTML5 app needs the JavaScript API to do anything meaningful. The API provides methods for closing the dialog, interacting with the extension app, and keyboard functionality.
- The HTML5 app optionally includes a CSS resource to ensure that the dialog style matches the POS theme.
- Images in the Content/Extension Application Content are referenced in the HTML5 document using the `img` element and a special access syntax for the source.
- The HTML5 app executes methods indirectly on the extension app.
- Custom dialog nesting.

3

Code Samples

Click [Sample HTML5 Dialog Extension](#) to download a sample application that demonstrates how to code a dialog with C#, SIM, and HTML5. Most of the code here (HTML5, C#, SIM) is available in complete form in the sample application.

Most of the samples demonstrate a particular aspect of the feature with a minimal amount of code. Because of this, there is less error checking and the HTML5 is minimal.



NOTE:

Copy and paste the code from the sample application and not from this document. The code in this document is not self-contained; only enough code is provided to illustrate the implementation.

4

Cross-Platform Development

The API is the same across Microsoft Windows, Linux, and Android.

When choosing a language (C# or SIM), consider the support details listed in the following table:

	Microsoft Windows	Linux	Android
C#	X	X	Not supported
SIM	X	X	X

Android does not support .NET assemblies. If your application must support all platforms, SIM is the only choice.

5

Rendering Technology

Simphony uses Chromium Embedded Framework (CEF) across all platforms for rendering the HTML5 application. CEF is the world standard for browser rendering, and it allows extensibility developers to use the latest available HTML5 features. An added benefit is that dialogs render identically across platforms.

Microsoft Windows and Linux use the same CEF version (currently set to 118.6.8). Android uses the version of the browser installed on the device. On all platforms, the chromium version writes to the EGateway log at startup.

HTML5 dialogs on the POS have different containers based on the platform:

- Linux, Android:
 - o A full screen iframe to house the dialog HTML5.
 - o The iframe background is transparent.
- Microsoft Windows:
 - o A full-screen WPF dialog containing a browser control (CEF).
 - o The dialog window is transparent.

Make sure the dialog is full-screen, transparent, and centered on the screen.

Android Considerations

The Custom HTML dialog feature is only supported for Chrome/CEF versions 85 and higher.

The Oracle workstation base images for Windows and Linux come with their own CEF browser control. The shipped version is currently 85, and as of this writing, the current *release* Chrome version is 103.

Android devices come with their own Chrome/CEF instance. The Service Host APK takes advantage of the built-in Android browser. As such, it is possible that the Android Chrome/CEF version is *below* 85. The extensibility writer should do the following:

1. Add Chrome/CEF version checking in the dialog java script to validate that the version is correct.
2. Ensure that the customers' devices are at the appropriate version.

Please include this code, or some variation of it, in *all* custom dialogs.

JavaScript
<pre>// your onload initialization code. function onload() { // call this first, before accessing the API validateRuntime(); }</pre>

```
function validateRuntime()
{
    let valid = true;

    // validate chrome/cef version
    let minCefVersion = 85;
    let cefVersion = getChromeCefVersion();
    if (cefVersion == '?' || (cefVersion < minCefVersion))
    {
        alert('Chrome/CEF version below ' + minCefVersion + ', please
upgrade.\nCalculated version: ' + cefVersion + '\nUser agent: ' +
navigator.userAgent);
        valid = false;
    }

    // validate api object valid
    if (typeof SymphonyKioskAPI == 'undefined')
    {
        alert('SymphonyKioskAPI undefined. Please verify Chrome/CEF
version is correct.');
```

```
        valid = false;
    }

    return valid;
}

function getChromeCefVersion()
{
    try
    {
        let uaParts = navigator.userAgent.split(' ');
        for (let i = 0; i < uaParts.length; i++)
        {
            if (uaParts[i].startsWith("Chrome"))
            {
                let parts = uaParts[i].split('/');
                let vers = parts[1].split('.');
                return vers[0];
            }
        }
    }
    catch (ex)
    {
        log('error getting chrome version: ' + ex);
    }
    return '?';
}
```

6

Raising a Dialog

Raise a dialog as follows:

- C#: Call the `OpsContext.ShowExtensibilityHtmlDialog()` method.
- SIM: Call the `WaitForHtmlDialog` command.

`OpsContext.ShowExtensibilityHtmlDialog()` is synchronous, similar to the WPF `ShowDialog()` method. Control returns to the extensibility application when the dialog is closed.

In SIM, the `WaitForHtmlDialog` returns immediately, similar to the `WaitForRxMsg` command.

The extension app expects to supply the HTML5/JavaScript/CSS. This is accomplished in two ways:

1. Provide a simple string: in-place html.
2. Provide a zip file in the form of a binary array: web directory.

In-Place HTML

In the follow code sample, the HTML reads from the extension application content table. It can also be read from an embedded resource in the assembly (if C#) or constructed in place.

```
C#  
[ExtensibilityMethod]  
public void RaiseInPlaceDialog()  
{  
    var parms = new  
    Micros.PosCore.Extensibility.UserInterface.ExtensibilityInPlaceHtmlDialog  
    Parameters();  
    parms.HTML =  
    DataStore.ReadExtensionApplicationContentTextByNameKey( OpsContext.RvcID,  
    ApplicationName, "html" );  
    string result = OpsContext.ShowExtensibilityHtmlDialog( parms );  
    OpsContext.ShowMessage( result );  
}
```

SIM
<pre> event inq:1 var parms:object = new Micros.PosCore.Extensibility.UserInterface.ExtensibilityInPlaceHtml DialogParameters() parms.HTML = @DataStore.ReadExtensionApplicationContentTextByNameKey(@OpsContext.RvcID, @ApplicationName, "html") WaitForHtmlDialog parms, "SampleDialogClosed" endevent event dialog:SampleDialogClosed @OpsContext.ShowMessage(@HtmlDialogResult) endevent </pre>

Web Directory

A more versatile method of supplying the dialog HTML5 is through the “web directory dialog”. The custom dialog HTML5 passes in as a ZIP file (byte array). The ZIP file usually reads from extension application content, but it can also be an embedded resource in the extension app assembly.

C#
<pre> [ExtensibilityMethod] public void RaiseWebDirDialog() { var parms = new Micros.PosCore.Extensibility.UserInterface.ExtensibilityWebDirectoryDialogParameters(); parms.WebDirectoryZip = DataStore.ReadExtensionApplicationContentDataByNameKey(OpsContext.RvcID, ApplicationName, "webdir"); string result = OpsContext.ShowExtensibilityHtmlDialog(parms); OpsContext.ShowMessage("Dialog returned: " + result); } </pre>

SIM
<pre> event inq:2 var parms:object = new Micros.PosCore.Extensibility.UserInterface.ExtensibilityWebDirectoryDialogParameters() parms.WebDirectoryZip = @DataStore.ReadExtensionApplicationContentDataByNameKey(@OpsContext.RvcID, @ApplicationName, "webdir") parms.StartResource = "index.html" WaitForHtmlDialog parms, "SampleDialogClosed" endevent event dialog:SampleDialogClosed @OpsContext.ShowMessage(@HtmlDialogResult) endevent </pre>

7

Example Dialog HTML5

Simple Centered Dialog


This is an example of a simple HTML5 dialog:

- The `<script>` tag is used to include the Symphony POS API.
- The close button calls the API to close the dialog.

This dialog appears at the top left of the full screen, and the container is transparent.

HTML (SampleMinimal.html)

```
<!DOCTYPE html>
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
  <script src="Symphony/POSDialogAPI.js" charset="UTF-8"></script>
</head>
<body>
  <span style="background-color:lightblue; padding: 10px; width: auto;">
    Simple HTML Example
    <button onclick="SymphonyPOSAPI.closeDialog()">Close</button>
  </span>
</body>
</html>
```

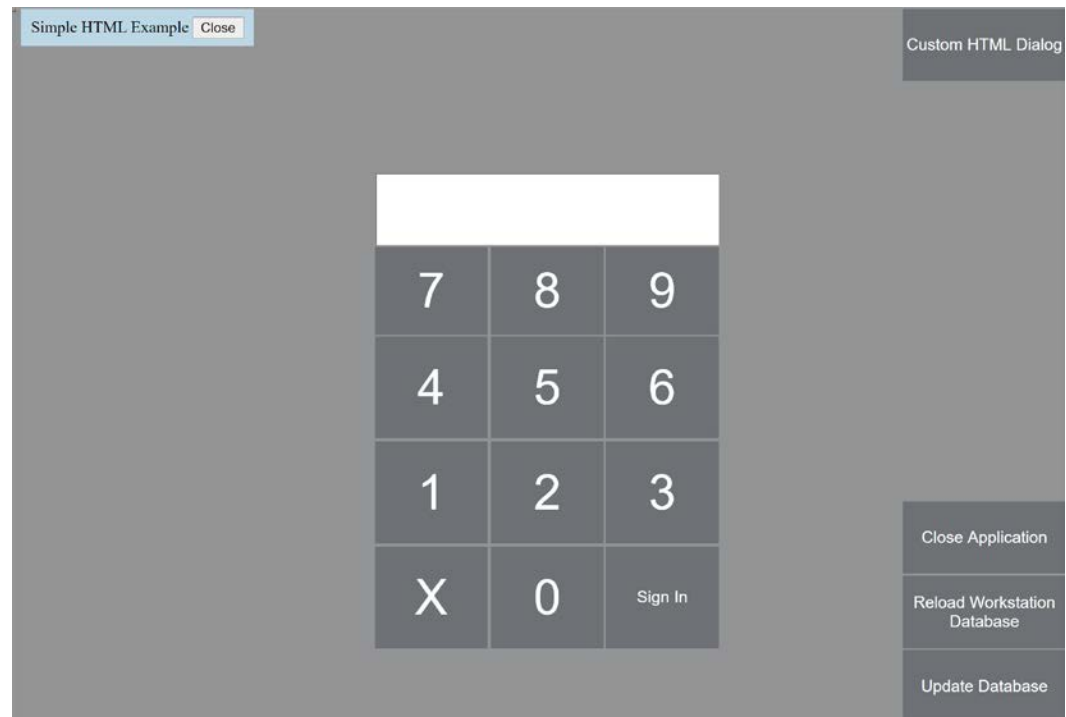

Dialog Styling

The purpose of styling is to convert text in an input box to upper case, as well as return the contents of the input box to the extensibility application. This section explains how to:

- Style dialog elements to match the Symphony style.
- Center the dialog.
- Return a result to the extensibility app.


HTML (SampleStyling.html)
<pre> <html> <head> <link href="Symphony/POSTheme.css" rel="stylesheet" type="text/css" /> </head> <script src="Symphony/POSDialogAPI.js"></script> <style> button { min-height: 30px; min-width: 80px; } </style> <SCRIPT LANGUAGE='JavaScript'> function closeClick() { let elem = document.getElementById('myTextInput'); } </pre>


```


        SymphonyPOSAPI.closeDialog(elem.value);
    }
    function convert()
    {
        let elem = document.getElementById('myTextInput');
        elem.value = elem.value.toUpperCase();
    }
</SCRIPT>
</head>

<body onload="onload()">
    <div class="SymphonyPOSDialogWindow SymphonyPOSCenterWindow">
        <table border="0">
            <tr>
                <td class="SymphonyPOSDialogTitleBar">My Custom
Dialog</td>
            </tr>
            <tr>
                <td>
                    Text to convert:
                    <input type="text" id="myTextInput"
style="width:250px; background-color: lightyellow;" />
                    <button class="SymphonyPOSDialogFunctionButton"
onclick='convert()'>Convert</button>
                    <button class="SymphonyPOSDialogControlButton"
onclick='closeClick()'>Close</button>
                </td>
            </tr>
        </table>
    </div>
</body>
</html>

```

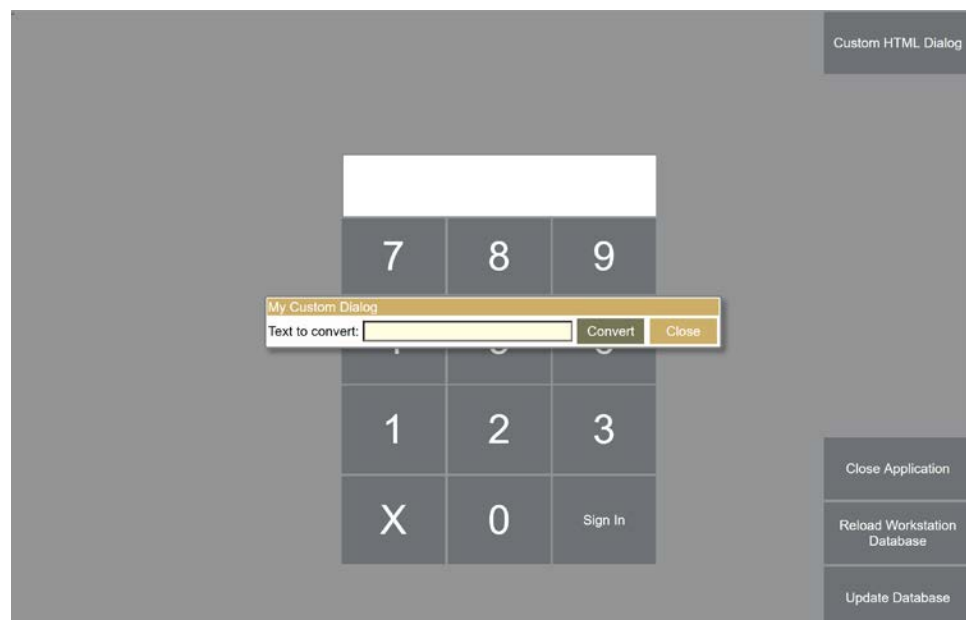

This dialog will be styled based on the current theme:

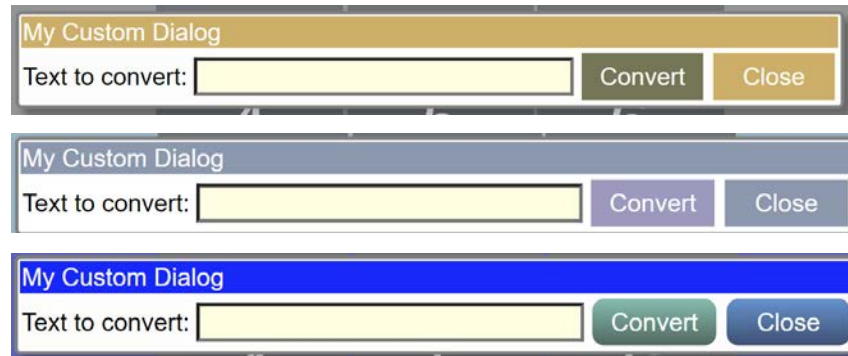

Notes

1. The application can call the API `closeDialog()` function with optional data. This data is returned to the ext app from the `RaiseBrowserDialog()` method. The data must be a string. If you pass back a complicated object, use `JSON.stringify()`.
2. The styling elements are:
 - a. `SimphonyPOSDialogWindow`: styles the window foreground and background colors, the dialog 'shading', and the border.
 - b. `SimphonyPOSCenterWindow`: styles the window to center within the screen.
 - c. `SimphonyPOSDialogTitleBar`: styles a title bar based on the current theme.
 - d. `SimphonyPOSDialogControlButton`, `SimphonyPOSDialogFunctionButton`: two buttons styles to match the POS dialog theme. The control button style is usually for buttons that close the dialog, the function buttons are for dialog functionality.

Image References

Images can be static or dynamically retrieved.

A web directory can contain an img folder with all relevant images. The tag src attribute provides the reference as follows:

```
<img src='img/myimage.jpg' />
```

You can use one of the following methods to dynamically reference an image:

- From Extension Application Content.
- From Content.
- From the extensibility application.

To reference database images, the Symphony/Database virtual directory pulls the image directly from the database without any extra coding. Ext app images require the application to first subscribe to the Resource Not Found event and then monitor the resources requests.

The resource not found event is useful for these reasons:

- Supplies a dynamically generated image from code.
- Intercepts unknown resource requests for debugging. For example, if a resource reference is misspelled, it is intercepted.

HTML (SampleImages.html)

```
<html>
<head>
  <link href="Symphony/POSTheme.css" rel="stylesheet" type="text/css"
/>
  <script src="Symphony/POSDialogAPI.js"></script>
  <style>
    button {
      min-height: 30px;
      min-width: 80px;
    }

    img {
      width: 100px;
      height: 50px;
    }
  </style>
</head>

<body>
  <div class="SymphonyPOSDialogWindow SymphonyPOSCenterWindow">
    <table>
      <tr>
        <td class="SymphonyPOSDialogTitleBar">My Custom
Dialog</td>
      </tr>
      <tr>
        <td>
          <!-- image supplied by ext app -->
```

```

        
        <!-- image read from ext app content -->
        

        <!-- image read from content -->
        
    </td>
</tr>
<tr>
    <td align="right">
        <button class="SimphonyPOSDialogControlButton"
onclick='SimphonyPOSAPI.closeDialog()'>Close</button>
    </td>
</tr>
</table>
</div>
</body>
</html>

```

C#

```

public CustomHTMLDialogApp( IExecutionContext context )
    : base( context )
{
    OpsResourceNotFoundEvent +=
CustomHTMLDialogApp_OpsResourceNotFoundEvent;
}

private EventProcessingInstruction
CustomHTMLDialogApp_OpsResourceNotFoundEvent( object sender,
OpsResourceNotFoundEventArgs args )
{
    if ( args.URL == "a/b/ext-flag-a.jpg" )
    {
        args.ResourceSupplied = true;
        args.ResourceExtension = "jpg";
        args.BinaryResource =
DataStore.ReadExtensionApplicationContentDataByNameKey( OpsContext.RvcID,
ApplicationName, "flag-a.jpg" );
    }
    return EventProcessingInstruction.Continue;
}

```

SIM


```

event init
    SubscribeToEvent "OpsResourceNotFoundEvent",
"ResourceNotFoundEvent"
endevent

event ResourceNotFoundEvent( var sender:object, var args:object)
    if args.URL = "a/b/flag-a.jpg"
        args.ResourceSupplied = 1
        args.ResourceExtension = "jpg"
        args.BinaryResource =
@DataStore.ReadExtensionApplicationContentDataByNameKey(
@OpsContext.RvcID, @ApplicationName, "flag-a.jpg" )
    endif

```

endevent

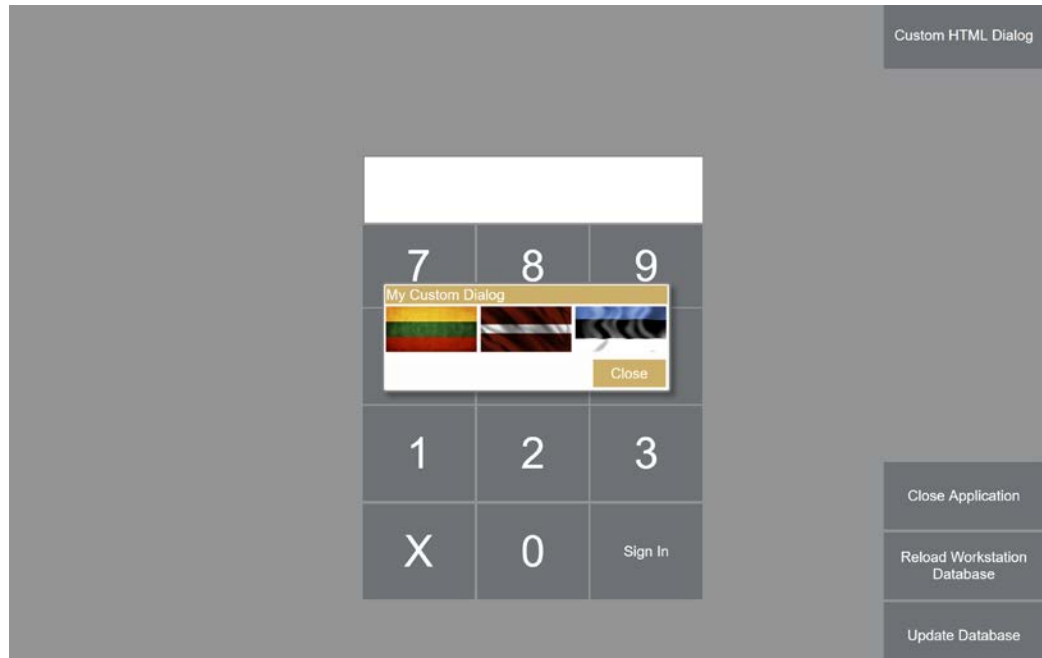

Notes

- The API reserves the Symphony root directory for API-specific resources. This includes JavaScript, CSS, and image references. Do not create a Symphony directory in your application because the API ignores it.
- There are two images stored in this database, one in the Extension application module and the other in the Content module. The image name (flag-a.png) must match the content name. Include the extension in the name.
 - o The Extension Application module.

General Designer: sim

Current Record

DbID 481

Name CustomHTMLDialogSample

Extension Application Contents

#	Zoneable Key
1	dll
2	flag-a.jpg
3	flag-b.jpg
4	html
5	sim
6	webdir

- o Content module

Home Page Content Enterprise

Filter

Show Records Where: Show All Records contains the text Filter Now Clear Filters Clear and R...

Name	Zone/Location	Inheritance Type	Description	Content Type
flag-c.png	Enterprise	Defined Here	flag-c.png	Image (JPG)

- Any type of resource can be stored in content: images, CSS, JavaScript.
- This sample reads the image from the extension app content but it can read from an embedded resource.
- If you do not subscribe to this event, unknown resources are ignored.

8

Extensibility Callbacks

This feature has the ability for the dialog JavaScript to call into the C# extensibility app while the dialog is running.

High-level overview:

- The following options are available for calling C# code from JavaScript:
 - Extensibility event
 - Extensibility method
 - Context method.
- String data passes to the C# app and string data returns to the JavaScript app.

The result types from a call are success, error, and timeout. All types are functionally equivalent. The differences between the types are stylistic and provide different levels of abstraction for the extensibility application.

Extensibility Event

Use the following JavaScript to raise a custom dialog event in the extensibility application:

```
JavaScript
function convertThroughExtEvent()
{
    let parms = new SymphonyPOSAPI_ExtensibilityEventParameters();
    parms.sender = 'MainDialog';
    parms.command = 'ToUpper';
    parms.argument = document.getElementById('textInput').value;

    SymphonyPOSAPI.runExtensibilityEvent(parms,
        (parmsOut) => document.getElementById('textInput').value =
parmsOut.response);
}
```

- ExtensibilityEventParameters must be allocated; do not create a simple Object.
- SymphonyPOSAPI.runExtensibilityEvent() is asynchronous and must be passed as a callback to process the response. If no processing is required, null can be passed in.
- The callback receives an object, which then indicates success, error, or timeout.
- The callback object response contains the string value returned from the extensibility application.

The code to process this event is:

C#

```
public CustomHTMLDialogApp( IExecutionContext context )
    : base( context )
{
    OpsCustomDialogEvent += CustomHTMLDialogApp_OpsCustomDialogEvent;
}

private EventProcessingInstruction
CustomHTMLDialogApp_OpsCustomDialogEvent( object sender,
OpsCustomDialogEventArgs args )
{
    switch ( args.Command )
    {
        case "ToUpper":
            args.Response = args.Argument.ToUpper() + " from ext event";
            break;
    }
    return EventProcessingInstruction.Continue;
}
```

SIM

```
event init
    SubscribeToEvent "OpsCustomDialogEvent", "CustomDialogEvent"
endevent

event CustomDialogEvent( var sender:object, var args:object )
    if args.Command = "ToUpper"
        args.Response = args.Argument.ToUpper() && " from sim dlg
event"
    endif
endevent
```

This is the classic extensibility pattern for shuttling all events into one method. The disadvantage of this pattern is that the switch() statement will eventually become very complicated.

Extensibility Method

Use the following code to call an individually named extensibility method in both SIM and C#.

JavaScript

```
function convertThroughExtMethod()
{
    let parms = new SymphonyPOSAPI_ExtensibilityMethodParameters();
    parms.dllName = "CustomHTMLDialogSample.dll";
    parms.method = 'ToUpper';
    parms.argument = document.getElementById('textInput').value;
    SymphonyPOSAPI.runExtensibilityMethod(parms,
        (parmsOut) => document.getElementById('textInput').value =
        parmsOut.response );
}
```

This code is similar to calling an extensibility event. In SIM, the 'DllName' property is ignored.

C#

```
[ExtensibilityMethod]
public object ToUpper( object arg )
{
    var text = arg as string;
    return text.ToUpper() + " from ext method";
}
```

SIM

```
event extensibility_method : ToUpper
var emd:object = @ExtensibilityMethodArgs
emd.Response = emd.Argument.ToUpper() && " from sim ext method"
endevent
```

This pattern is more useful for isolating code.

Context Method

The context method provides a more useful pattern when the ext app contains multiple dialogs with many states to initialize. It is similar to the extensibility method but instead calls the method on a specific user-supplied .NET object rather than the extension app.

JavaScript

```
function convertThroughContextMethod()
{
    let parms = new SymphonyPOSAPI_ContextMethodParameters();
    parms.Method = 'ToUpper';
    parms.Argument = document.getElementById('textInput').value;
    SymphonyPOSAPI.runContextMethod(parms,
        (parmsOut) => document.getElementById('textInput').value =
        parmsOut.response );
}
```

C#

```
[ExtensibilityMethod]
public void RaiseInPlaceDialog()
{
    var parms = new
    Micros.PosCore.Extensibility.UserInterface.ExtensibilityInPlaceHtmlDi
    alogParameters();
    parms.HTML =
    DataStore.ReadExtensionApplicationContentTextByNameKey( OpsContext.Rv
    cID, ApplicationName, "html" );
    parms.Sender = "CustomHTMLDialogSample-SampleApp";
    parms.Context = new DialogContext();
    string result = OpsContext.ShowExtensibilityHtmlDialog( parms );
}

public class DialogContext
{
    public object ToUpper( object arg )
    {
        var text = arg as string;
        return text.ToUpper() + " from content method";
    }
}
```

SIM

SIM does not support the Context method

Keep the following in mind:

- The context for the dialog is set in the parameters. It can be any object.
- The [ExtensibilityMethod] attribute is not required.

Consider an ext app with multiple dialogs, each having multiple callbacks. The code would look like:

```
Dialog1_FuncA {}
Dialog1_FuncB {}
Dialog1_FuncC {}

Dialog2_FuncA {}
Dialog2_FuncB {}

Dialog3_FuncA {}
Dialog3_FuncB {}
Dialog3_FuncC {}
Dialog3_FuncD {}
```

The code for all three dialogs is mixed in with each other and initialization can be easy to overlook.

If each dialog has its own context object, the code can be more easily partitioned, isolated, and initialized:

```
class Dialog1
{
    A() {}
    B() {}
    C() {}
}

class Dialog2
{
    A() {}
    B() {}
}

class Dialog3
{
    A() {}
    B() {}
    C() {}
    D() {}
}
```

In a sense, this pattern mirrors a WPF dialog, which has XAML and code-behind. In this case, we use HTML5 and the code-behind is its own object.

Which to Use?

Use either the extensibility methods or context methods. If an ext app has one dialog and that dialog does not have many callbacks, the extensibility methods are the most useful.

If the ext app raises multiple dialogs, each with its own state and methods, the context method is preferable.

Results Status

Each method call type returns a method response object. This object contains the status of the call (success, timeout, error) and the returned string data.

Status	Usage	Response value
SUCCESS	<code>if (parmsOut.isSuccess())</code>	The string value from the method call
ERROR	<code>if (parmsOut.isError())</code>	Error text generate by the system indicating the error.
TIMEOUT	<code>if (parmsOut.isTimeout())</code>	None

The following method will process a response from the API. All three conditions are tested (success, error, timeout) and error handling is up to the user.


```
JavaScript
function processResponse(parmsOut, callback)
{
    if (parmsOut.isSuccess())
    {
        if (callback)
            callback(parmsOut.Response);
    }
    else if (parmsOut.isError())
        alert('Error: ' + parmsOut.Response);
    else if (parmsOut.isTimeout())
        alert('Timeout');
}
```

9

System Keyboard

The API lets you insert a keyboard directly into the HTML5 document. If a form requires a text input, the dialog keyboard eliminates the need for a physical keyboard.

The following is an example dialog for entering custom information using the API keyboard:

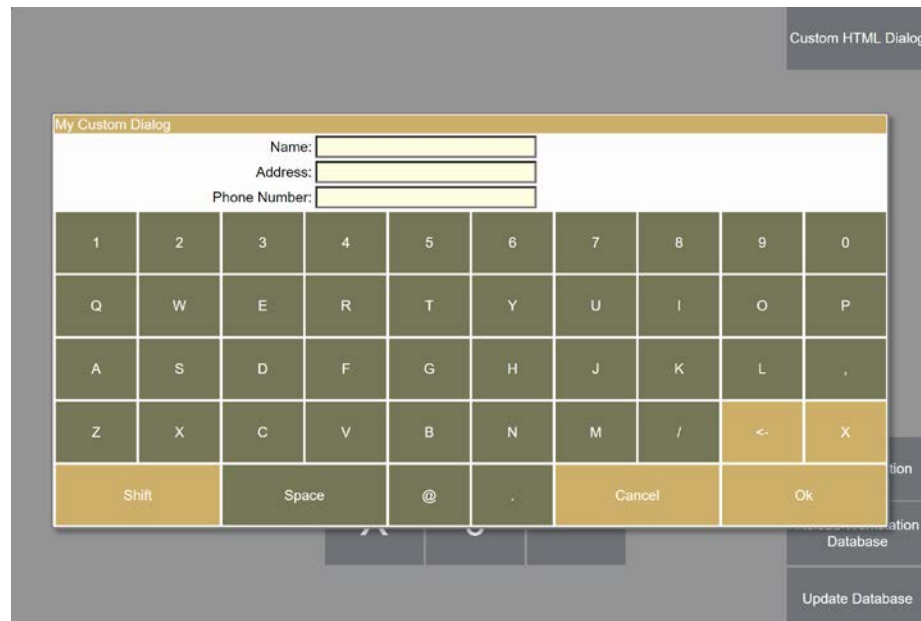

Dialog elements:

- Three input fields, each with its own input requirements
- API-supplied keyboard with Ok and Cancel buttons

Displaying the Keyboard

Displaying a keyboard is very straightforward. The minimum requirements to display the keyboard are:

- Creating a DOM element to 'contain' the keyboard. For example, a simple `<div>`.
- Calling `SimphonyPOSAPI.setKeyboard()` to initialize the keyboard.
- Indicate if the OK/Cancel buttons should be displayed with the keyboard

HTML

```
<div id='dlgKeyboard'></div>
```

JavaScript

```
function onload()
{
    let kbParms = new SymphonyPOSAPI_KeyboardParameters();
    kbParms.container = document.getElementById('dlgKeyboard');
    kbParms.showFunctionButtons = false;
    SymphonyPOSAPI.setKeyboard(kbParms);
}
```

The user application is responsible for sizing the keyboard appropriately. This sample code will size the keyboard to take 90 percent of the width and 50 percent of the height of the display.

JavaScript

```
let kb = document.getElementById('dlgKeyboard');
kb.style.height = '' + (window.innerHeight * .50) + 'px';
kb.style.width = '' + (window.innerWidth * .90) + 'px';
```

Reacting to Keyboard Events

Reacting to keyboard events is a complicated process. There are several uses for the extensibility developer:

- The ext app JavaScript handles all key presses.
- The API handles all the key presses.
- The API and ext app work together.

Ext App Handles All Key Presses

In this mode, the ext app initializes the API keyboard with a callback. When a button is pressed, the callback performs any processing.

```
JavaScript

function onload()
{
    let kbParms = SymphonyPOSAPI.allocateKeyboardParameters();
    kbParms.container = document.getElementById('dlgKeyboard');
    kbParms.callback = kbCallback;
    SymphonyPOSAPI.setKeyboard(kbParms);
}

function kbCallback(args)
{
    switch (args.keyboardEvent)
    {
        case SymphonyPOSAPI_KeyboardEventType.OK:
            break;
        case SymphonyPOSAPI_KeyboardEventType.CANCEL:
            break;
        case SymphonyPOSAPI_KeyboardEventType.TEXT:
            break;
    }
}
```

The ext app is responsible for populating any <input> elements.

API Handles All Key Presses

Place the API in the OSK mode. Any <input> elements present in the HTML5 document will be fed keyboard data based on the currently focused element. OSK mode is useful when there are multiple text boxes on the dialog.

```
JavaScript

let kbParms = SymphonyPOSAPI.allocateKeyboardParameters();
kbParms.enableOSKMode = true;
kbParms.container = document.getElementById('dlgKeyboard');
SymphonyPOSAPI.setKeyboard(kbParms);
```

When OSK mode is selected, the API assumes that every text box is selected for OSK mode. Alternatively, the ext app can supply the text boxes of interest.

```
JavaScript

let kbParms = SymphonyPOSAPI.allocateKeyboardParameters();
kbParms.enableOSKMode = true;
kbParms.domElementsToUse = [document.getElementById('textbox1'),
    document.getElementById('textbox2')];
kbParms.container = document.getElementById('dlgKeyboard');
SymphonyPOSAPI.setKeyboard(kbParms);
```

API and Ext App Both Handle Key Presses

When the ext app sets the callback property in the keyboard parameters, the API will always call the callback if the keyboard event args. The callback can do the following:

1. Inspect the command and text elements (alpha, ok, cancel)
2. Inspect the currently focused input element ('target' property). Note that this can be null.
3. Set the 'ignore' property to ignore the keyboard event.
4. Set the 'text' property to change the alpha text.

Consider the use case of the sample dialog, which has the following three text boxes: name, address, and phone number. The ext app may have these constraints:

- The name must always be in uppercase.
- The phone number can only contain digits.

In OSK mode, the text boxes are fed the alpha characters. By specifying a callback, the ext app can implement the two constraints.

JavaScript (SampleKb.html)

```
function kbCallback(args)
{
    if (args.keyboardEvent == SymphonyPOSAPI_KeyboardEventType.OK)
    {
        // package form elements and pass back to app
        SymphonyPOSAPI.closeDialog();
    }
    else if (args.keyboardEvent ==
SymphonyPOSAPI_KeyboardEventType.CANCEL)
    {
        SymphonyPOSAPI.closeDialog();
    }
    else if (args.keyboardEvent == SymphonyPOSAPI_KeyboardEventType.TEXT
&& args.target && args.target.id)
    {
        // if phone number ignore non-digits
        if (args.target.id == 'textInputPhoneNumber')
        {
            if (!("0123456789".includes(args.text)))
                args.ignore = true;
        }
        // if name convert to upper case
        else if (args.target.id == 'textInputName')
        {
            args.text = args.text.toUpperCase();
        }
    }
}
```


HTML/JavaScript

```

<html>
<head>
  <link href="Simphony/POSTheme.css" rel="stylesheet" type="text/css" />
  <script src="Simphony/POSDialogAPI.js"></script>

  <style>
    input {
      background-color: lightyellow;
    }
  </style>

  <SCRIPT LANGUAGE='JavaScript'>
    function onload()
    {
      // size the keyboard area
      let kb = document.getElementById('dlgKeyboard');
      kb.style.height = '' + (window.innerHeight * .50) + 'px';
      kb.style.width = '' + (window.innerWidth * .90) + 'px';

      // initialize on-screen keyboard
      let kbParms = new SimphonyPOSAPI_KeyboardParameters();
      kbParms.enableOSKMode = true;
      kbParms.container = document.getElementById('dlgKeyboard');
      kbParms.callback = kbCallback;
      kbParms.showFunctionButtons = true;
      SimphonyPOSAPI.setKeyboard(kbParms);
    }

    function kbCallback(args)
    {
      if (args.keyboardEvent == SimphonyPOSAPI_KeyboardEventType.OK)
      {
        // package form elements and pass back to app
        SimphonyPOSAPI.closeDialog();
      }
      else if (args.keyboardEvent == SimphonyPOSAPI_KeyboardEventType.CANCEL)
      {
        SimphonyPOSAPI.closeDialog();
      }
      else if (args.keyboardEvent == SimphonyPOSAPI_KeyboardEventType.TEXT &&
args.target && args.target.id)
      {
        // if phone number ignore non-digits
        if (args.target.id == 'textInputPhoneNumber')
        {
          if (!("0123456789".includes(args.text)))
            args.ignore = true;
        }
        // if name convert to upper case
        else if (args.target.id == 'textInputName')
        {
          args.text = args.text.toUpperCase();
        }
      }
    }
  </SCRIPT>
</head>

<body onload="onload()">
  <div class="SimphonyPOSDialogWindow SimphonyPOSCenterWindow">
    <table>
      <tr>

```

```
Dialog</td>      <td class="SimphonyPOSDialogTitleBar" colspan="2">My Custom
</tr>
<tr>
  <td align="right">Name:</td>
  <td><input type="text" id="textInputName" style="width:250px;"
/></td>
</tr>
<tr>
  <td align="right">Address:</td>
  <td><input type="text" id="textInputAddress" style="width:250px;"
/></td>
</tr>
<tr>
  <td align="right">Phone Number:</td>
  <td><input type="text" id="textInputPhoneNumber"
style="width:250px;" /></td>
</tr>
<tr>
  <td colspan="2">
    <div id='dlgKeyboard'></div>
  </td>
</tr>
</table>
</div>
</body>
</html>
```

10

Barcode Scanning

The API lets you pass in a scanned barcode into the HTML5 document. If a form requires a scanned barcode input, the `OpsBarcodePreviewEvent` can be used to forward this to the HTML5 document.

In order to allow scanned barcode input, the dialog parameter (`ExtensibilityHtmlDialogParameters`) property `AllowBarcode` needs to be set to true by the ext app.

The `OpsBarcodePreviewEvent` should be used to forward the scanned barcode to the HTML5 document using `SendExtensibilityHtmlDialogData()`.

C#

```
public CustomHTMLDialogApp( IExecutionContext context )
    : base( context )
{
    OpsBarcodePreviewEvent += CustomHTMLDialogApp_OpsBarcodePreviewEvent;
}

private EventProcessingInstruction
CustomHTMLDialogApp_OpsBarcodePreviewEvent(object sender,
OpsBarcodePreviewEventArgs args)
{
    // send barcode data to dialog
    OpsContext.SendExtensibilityHtmlDialogData(args.BarcodeString);
    return EventProcessingInstruction.Continue
}
```

SIM

```
event init
    SubscribeToEvent "OpsBarcodePreviewEvent", "OnBarcodePreviewEvent"
endevent

event OnBarcodePreviewEvent( var sender:object, var args:object )
    @OpsContext.SendExtensibilityHtmlDialogData(args.BarcodeString)
endevent
```

The HTML5 document needs to set and listen to async callbacks:

JavaScript

```
function onload()
{
    SymphonyPOSAPI.setAsyncDataCallback(asyncDataCallback);
}
function asyncDataCallback(data)
{
    document.getElementById('textBarcode').innerText = `Last barcode
scan: ${data}`;
}
```

11

JSON Serialization

There are two methods in the extensibility namespace for serializing and deserializing JSON:

```
C#  
  
namespace Micros.PosCore.Extensibility.Networking  
{  
    static public class JsonSerialization  
    {  
        static public string SerializeObjectToJson( object thing, bool formatted );  
        static public object DeserializeObjectFromJSON( string json, Type type );  
    }  
}
```

Although these methods are available, for SIM it is unclear of their utility, as SIM cannot define its own classes.

12

What It Does Not Do

The custom dialog feature does not provide the following functionalities for the HTML5 dialog application:

- Access to OpsContext and DataStore: The code-behind supplies this data to the dialog.
- Third-party frameworks: Libraries, such as jQuery, are not provided. The HTML5 app provides the framework in the web directory.
- XMLHttpRequest communications to extensibility application: The API must be used for executing code-behind.
- EGateway logging: The extensibility application should provide its own logging based on its needs.
- Asynchronous message from code-behind to the dialog: The dialog should poll for data periodically if needed.


13

Web Directory Dialog Format


Some HTML5 dialogs are too complex for a simple HTML5 document. There may be many images, different modules, and third-party frameworks. While it is possible to use content/ext app content to solve some of these problems, it can be difficult to configure and maintain.

The alternate method is to pass a ZIP file to `OpsContext.ShowExtensibilityHtmlDialog()`. The ZIP file can be stored in content, ext app content, or embedded in a .NET assembly. `RaiseBrowserDialog()` is passed a byte array with the zip file contents.

The simplest web directory is a ZIP file that contains a single `index.html` file:

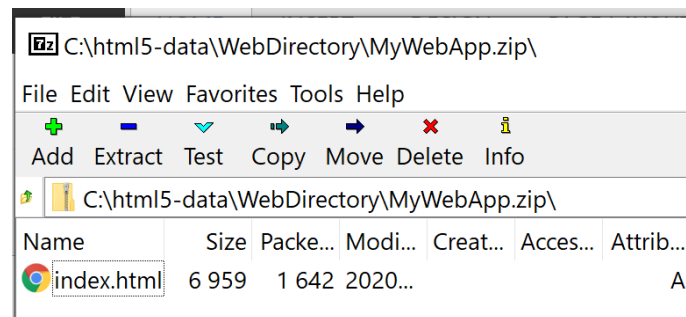

At run-time, the client searches for `index.html` as the start page. Override the start page resource in the dialog parameters. This allows multiple dialogs to coexist inside a web directory file. A more complex web directory can contain much more.

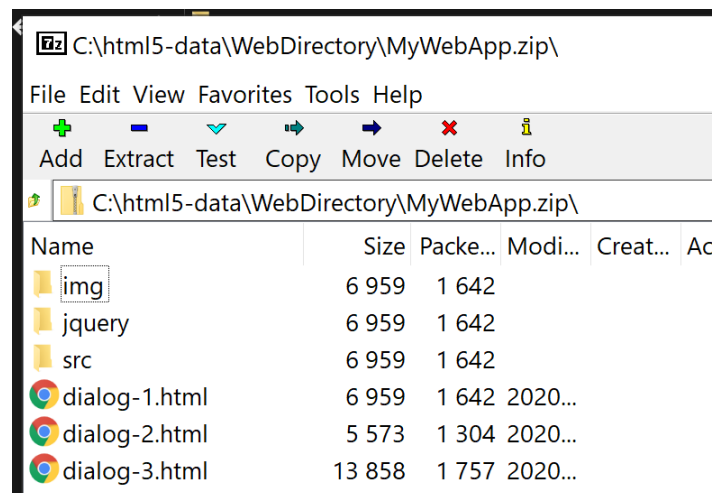

14

Debugging and Troubleshooting

Debugging a standard web application is a simple process, so long as you have direct access to the browser and its built-in debugger. Debugging on Symphony is more complex, given the closed nature of the container as well as operating system differences.

The custom dialog feature provides several facilities for aiding in writing and troubleshooting applications. Always disable these facilities on production code.

Close Button

When creating a custom HTML5 dialog, the JavaScript cannot parse, throw exceptions, and other issues. When this occurs, your dialog is considered 'dead' and there is no way to close it, as your close button may not even be displayed.

When instantiating a dialog, the C#/SIM can set a flag that automatically adds a 'close' button to the dialog.


C#

```
var parms = new
Micros.PosCore.Extensibility.UserInterface.ExtensibilityInPlaceHtmlDialog
Parameters();
parms.HTML =
DataStore.ReadExtensionApplicationContentTextByNameKey( OpsContext.RvcID,
ApplicationName, "html" );
parms.ShowCloseButton = false;
string result = OpsContext.ShowExtensibilityHtmlDialog( parms );
```

SIM

```
event inq:1
var parms:object = new
Micros.PosCore.Extensibility.UserInterface.ExtensibilityInPlaceHtml
DialogParameters()
parms.HTML =
@DataStore.ReadExtensionApplicationContentTextByNameKey(
@OpsContext.RvcID, @ApplicationName, "html" )
parms.ShowCloseButton = 1
WaitForHtmlDialog parms, "SampleDialogClosed"
endevent
```

When the dialog displays, the close button appears at the bottom right.

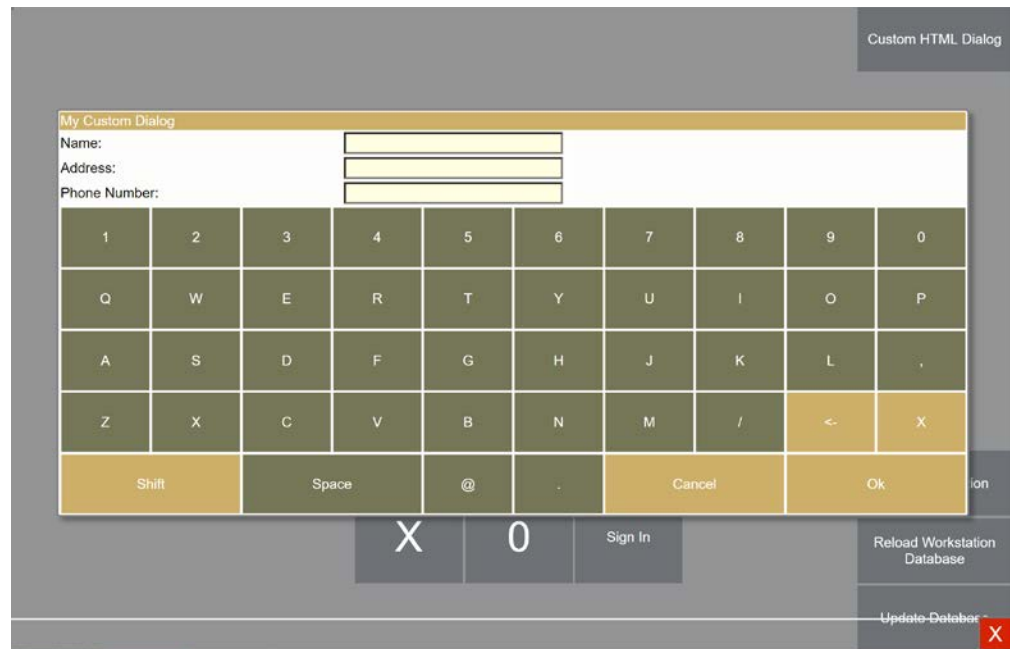

Pressing the close button is a hard close, meaning it dismisses the dialog without returning any data to the extensibility application. The size of the dialog is slightly smaller to accommodate the close button.

Debug Mode

None of the platforms allow for direct access to the browser or a built-in HTML5 debugger. The container on all platforms has no built-in debugger module.

When debug mode is enabled for a dialog, the extensibility application can open up the browser of its choice with a supplied URL. The POS will not open the browser; instead, it will only provide a URL that displays in a browser. In practical terms, debug mode only applies to Microsoft Windows. Theoretically, this can work on Linux and Android, however, it is a difficult process.

The following is an example of the supplied URL:

```
http://localhost:8080/CustomContent/ExtensibilityDialog/dbgyilfiwzidxwto
zfno/1/$CustomHTMDialogSample-inplace-html-1$
```

The requirements for the extensibility application and environment are:

- POS web.config.txt debug mode is enabled for the extensibility application.
- When instantiating the dialog set the DebugMode property to true in the dialog parameters.
- Subscribe to the OpsCustomDialogDebugModeReadyEvent.
- When the OpsCustomDialogDebugModeReadyEvent fires, the ext app should open a browser with the supplied URL.

Both the web.config.txt debug mode setting and the program set DebugMode have to be true to enable the mode.

Once the browser is opened, you can use the built-in browser debugger.

web.config.txt

```
<add key="Debug.CustomHTMLDialogSample.CustomDialogDebugMode.Enabled"
value="1" />
```

C#

```
public CustomHTMLDialogApp( IExecutionContext context )
    : base( context )
{
    OpsCustomDialogDebugModeReadyEvent +=
CustomHTMLDialogApp_OpsCustomDialogDebugModeReadyEvent;
}

[ExtensibilityMethod]
public void RaiseInPlaceDialog()
{
    var parms = new
Micros.PosCore.Extensibility.UserInterface.ExtensibilityInPlaceHtmlDialog
Parameters();
    parms.HTML =
DataStore.ReadExtensionApplicationContentTextByNameKey( OpsContext.RvcID,
ApplicationName, "html" );
    parms.DebugMode = true;
    string result = OpsContext.ShowExtensibilityHtmlDialog( parms );
}

private EventProcessingInstruction
CustomHTMLDialogApp_OpsCustomDialogDebugModeReadyEvent( object
sender, OpsCustomDialogDebugModeReadyArgs args )
{
    var browserProcess = new System.Diagnostics.Process();
    browserProcess.StartInfo.FileName = @"C:\Program
Files\Chromium\chrome.exe";
    browserProcess.StartInfo.Arguments = args.URL;
    browserProcess.Start();
    return EventProcessingInstruction.Continue;
}
```

SIM

```
NetImport from "System.Diagnostics.Process"
RetainGlobalVar
SetLocalScoping 1

event init
    SubscribeToEvent "OpsCustomDialogDebugModeReadyEvent",
"CustomDialogDebugModeReadyEvent"
endevent

event inq:1
    var parms:object = new
Micros.PosCore.Extensibility.UserInterface.ExtensibilityInPlaceHtml
DialogParameters()
    parms.HTML =
```

```
@DataStore.ReadExtensionApplicationContentTextByNameKey(
@OpsContext.RvcID, @ApplicationName, "html" )
parms.DebugMode = 1
WaitForHtmlDialog parms, "SampleDialogClosed"
endevent


event CustomDialogDebugModeReadyEvent( var sender:object, var
args:object)
var browserProcess:object = new System.Diagnostics.Process()
browserProcess.StartInfo.FileName = "C:\Program
Files\Chromium\chrome.exe"
browserProcess.StartInfo.Arguments = args.URL
browserProcess.Start()
endevent
```

When the dialog is raised, the POS instead shows a debug window on the POS.



The extensibility application debug event creates a browser instance, which can be used to troubleshoot your dialog.

The following image shows the POS application (on the left side) in debug mode, and a browser (on the right side) with debugging tools opened.

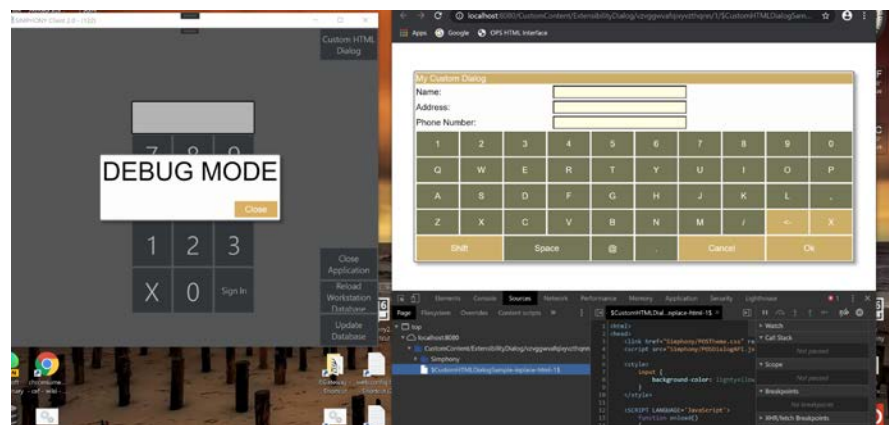

When the API `closeDialog()` method is called, the POS dismisses the debug window, and you must close the browser window.

Automatically Close Browser Window

To make development easier, the `SimphonyPOSAPI.DebugMode` property determines if you are running in debug mode. If in debug mode, the browser dialog can call `'window.close()'` to close the browser instance or the current tab. This code snippet remains in production, as debug mode should never be enabled in production code.

Javascript

```
function closeClick()
{
    // if we are in debug mode then close the current tab/window
    // there are timing issues with any javascript executing after the
    closeDialog()
    // method call. Close the window soon after closing the dialog.
    if (SimphonyPOSAPI.debugMode)
        setTimeout(function () { window.close(); }, 250);

    // send text back to ext app
    let result = getElem('textResult');
    SimphonyPOSAPI.closeDialog(result);
}
```

Checking for API Existence

We recommend checking for the existence of the API before calling any methods. One way to accomplish this is:

Javascript


```
function onload()
{
    // older or incompatible browsers can sometimes cause
    // Simphony/POSDialogAPI.js to fail to load.
    // If this happens the api object SimphonyPOSAPI may not exist
    // causing very subtle failures.
    // Show an error if the SimphonyPOSAPI is undefined.
    if (!("SimphonyPOSAPI" in window) && SimphonyPOSAPI)
    {
        alert('SimphonyPOSAPI is undefined, browser is possibly not up to
        date');
        return;
    }
}
```

15

Sample Custom HTML5 Dialog Application

The following sample application contains documentation on how to configure the Symphony system. It is a standard Visual Studio .csproj.

All of the code in this document is available in complete form in this sample application. The project contains HTML5, images, sim, and C# files.

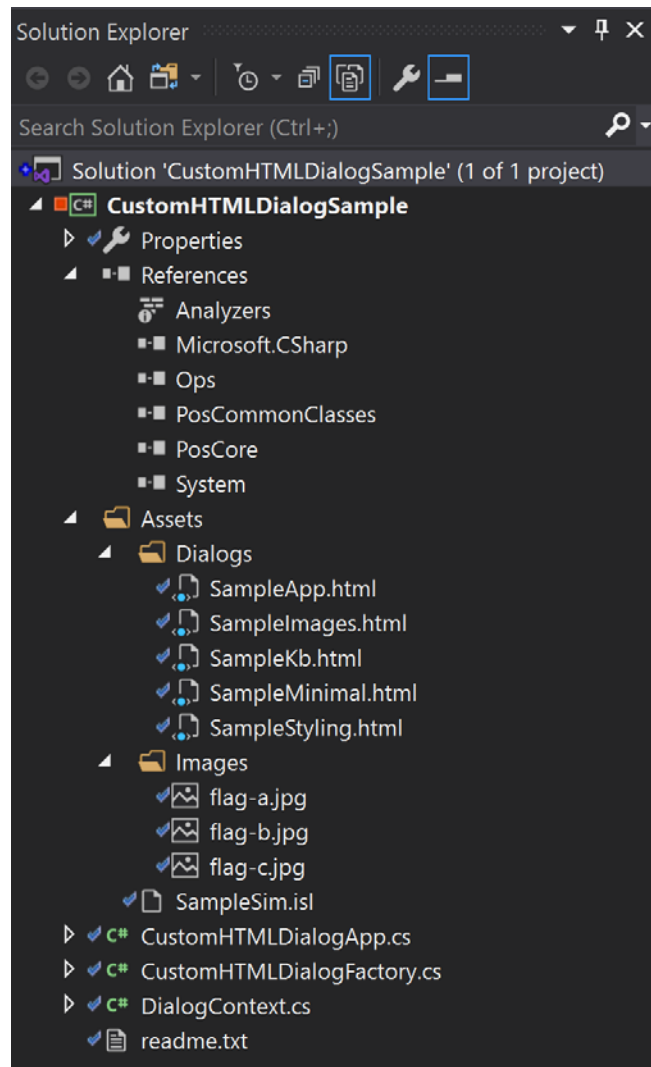

16

C# and SIM Differences

Overall, the same features are provided to SIM and C#. The notable differences are:

- SIM should not call the `OpsContext.ShowExtensibilityHtmlDialog()` method. The callbacks back into SIM will not work. Always use `WaitForHtmlDialog` instead.
- SIM does not allow for context methods, only extensibility event and extensibility method are allowed. In general, the context facility requires a more robust programming environment than SIM can offer. However, all three methods are functionally equivalent.

17

Feature Reference

POSDialogAPI.js

- **SimphonyPOSAPI**
 - o **argument**
 - property, read-only string
 - The value of the Argument property set in the parameters in the call to `OpsContext.ShowExtensibilityHtmlDialog()`
 - o **debugMode**
 - property, read-only boolean
 - Set to true if the dialog was launched in debug mode
 - o **closeDialog(data)**
 - method, called to close the current executing dialog
 - data parameter must be a string, null, or undefined
 - o **setKeyboard(parms)**
 - method, called to initialize on-screen keyboard
 - parms must be of type `SimphonyPOSAPI_KeyboardParameters()`
 - this method cannot be called twice in one dialog session. That is, it's not possible to have 2 or more keyboards in a single dialog.
 - o **runExtensibilityEvent(parms, callback)**
 - method, called to execute code in extensibility application using extensibility event mechanism
 - parms must be of type `SimphonyPOSAPI_ExtensibilityEventParameters`
 - this method is asynchronous and returns control immediately
 - callback is the method to execute when a response is received.
 - The callback method is called with a `SimphonyPOSAPI_ApplicationResponse` object.
 - Callback can be null
 - o **runExtensibilityMethod(parms, callback)**
 - method, called to execute code in extensibility application using extensibility method mechanism
 - parms must be of type `SimphonyPOSAPI_ExtensibilityMethodParameters`
 - see `runExtensibilityEvent()` for description of callback
 - o **runContextMethod(parms, callback)**
 - method, called to execute code in extensibility application using context method mechanism
 - parms must be of type `SimphonyPOSAPI_ContextMethodParameters`
 - see `runExtensibilityEvent()` for description of callback

- o `setAsyncDataCallback(callback)`
 - method, called to initialize the callback method used when data is passed via `OpsContext.SendExtensibilityHtmlDialogData()`
 - callback is the method to execute when data is received.
- `SimphonyPOSAPI_ApplicationResponseType`
 - o Enum, values indicate status of an extensibility call: SUCCESS, ERROR, TIMEOUT
- `SimphonyPOSAPI_ApplicationResponse`
 - o Object passed to callback method for `runExtensibilityEvent`, `runExtensibilityMethod`, `runContextMethod`
 - o status
 - read-only property, `SimphonyPOSAPI_ApplicationResponseType`
 - o response
 - read-only property, string
 - if a successful call then this property is the result set by the extensibility application back to the dialog
 - if an error occurred then this property will contain the error message
 - o `isSuccess()`, `isError()`, `isTimeout()`
 - shorthand methods to test status
- `SimphonyPOSAPI_ExtensibilityEventParameters`
 - o Object passed to the `runExtensibilityEvent()` method
 - o command
 - string property set by caller
 - this string will be passed to the extensibility application `OpsCustomDialogEventArgs.Message` property
 - o argument
 - string property optionally set by caller
 - this string will be passed to the extensibility application `OpsCustomDialogEventArgs.Argument` property
 - This property must be a string and not an object. Use `JSON.stringify()` to pass complex data.
- `SimphonyPOSAPI_ExtensibilityMethodParameters`
 - o Object passed to the `runExtensibilityMethod()` method
 - o dllName
 - the name of the assembly the extensibility method resides in. This parameter is the same that is used when configured a button in Page Designer.
 - This is null for SIM applications
 - o method
 - String property set by caller
 - This string represents the name of the method in the extensibility application
 - o argument
 - string property optionally set by caller
 - this string will be passed to the extensibility method as the first argument
 - This property must be a string and not an object. Use `JSON.stringify()` to pass complex data.
- `SimphonyPOSAPI_ContextMethodParameters`
 - o Object passed to the `runContextMethod()` method

- o method
 - string property set by caller
 - Name of method in the dialog context object
 - o argument
 - this string will be passed to the method as the first argument
- SymphonyPOSAPI_KeyboardParameters
 - o Object passed to the setKeyboard method()
 - o container
 - DOM element whose innerHTML will be set to the on-screen keyboard
 - Cannot be null
 - o enableOSKMode
 - boolean property
 - if true then the API will 'feed' characters into the currently focused textbox.
 - If false then the dialog must process all key presses.
 - The types of input elements that are searched for are 'email', 'number', 'password', 'search', 'tel', 'text', 'url', 'date'
 - o callback
 - property that can be optionally set with a callback when a key is pressed.
 - The callback will be passed a SymphonyPOSAPI_KeyboardEventArgs object
 - o domElementsToUse
 - optional array property, each element of the array is an <input> dom element
 - This configuration element allows finer control for choosing which textboxes are fed key presses.
 - o showFunctionButtons
 - Boolean property set by user
 - If true, then the ok/cancel buttons will be displayed. If false, the buttons will be hidden.
- SymphonyPOSAPI_KeyboardEventType
 - o Enum of keyboard event types: OK, CANCEL, TEXT, BACKSPACE, CLEAR, OTHER
- SymphonyPOSAPI_KeyboardEventArgs
 - o The object passed to the callback method defined in SymphonyPOSAPI_KeyboardParameters
 - o keyboardEvent
 - read-only property of type SymphonyPOSAPI_KeyboardEventType
 - If TEXT then the 'text' property will contain the key press.
 - o text
 - String property containing the key press value if the keyboardEvent is TEXT. The value is undefined if the keyboardEvent is not TEXT.
 - The dialog can change this value, for example, set it to its upper-case value.
 - o target
 - Readonly property, DOM element.

- if enableOSKMode is enabled the API keeps track of the currently focused input element. When a keyboard event target is set to the currently focused input element.

POSTheme.css

- `SimphonyPOSDialogWindow`
 - Style of dialog window.
- `SimphonyPOSCenterWindow`
 - Will center selected item in the window, both vertically and horizontally.
- `SimphonyPOSDialogTitleBar`
 - Will format the selected item with the theme-specific foreground and background colors.
- `SimphonyPOSDialogControlButton`
 - Will format the selected item as a control button.
 - Control buttons should be buttons that dismiss the dialog: ok, cancel, close.
- `SimphonyPOSDialogFunctionButton`
 - Will format the selected item as a function button
 - Function buttons perform actions within the dialog.

OpsContext

- `ShowExtensibilityHtmlDialog(ExtensibilityHtmlDialogParameters parameters )`
 - Parameters must be one of these types:
 - `ExtensibilityInPlaceHtmlDialogParameters`
 - `ExtensibilityWebDirectoryDialogParameters`
 - Returns string result from dialog
 - Control is only passed back when the dialog exists.
 - Can be nested.

Support Classes

- `ExtensibilityHtmlDialogParameters`
 - Namespace: `Micros.PosCore.Extensibility.UserInterface`
 - Base class for parameters for showing a dialog. Contains common properties.
 - `Sender`
 - String property
 - The `Sender` value will be sent to the extensibility application in the `OpsCustomDialogEventArgs.Sender` field
 - If an extensibility application can display two or more dialogs, this property allows the extensibility application to determine which dialog was raised. For example, the value could be `"MyDialog1"`, `"MyDialog2"`, ...
 - `Argument`
 - String property
 - The `Argument` is available to the dialog in `POSDialogAPI.argument` property
 - `Context`
 - Object property

- When `POSDialogAPI.runContextMethod()` is called, the specified method is invoked on this object.
 - o `ShowCloseButton`
 - Boolean property
 - When set to true the POS will display a close button alongside the dialog.
 - This property is useful during development when the dialog code can be unstable.
 - o `DebugMode`
 - Boolean property
 - When set to true the dialog will be raised in debug mode.
 - The corresponding `web.config.txt` setting must also be present to enable debug mode. The format of the `web.config.txt` entry is the following. Note that the `ExtAppName` must correspond to the extensibility application name .
 - `<add key="Debug.ExtAppName.CustomDialogDebugMode.Enabled" value="1" />`
 - o `AllowBarcode`
 - Boolean property
 - When set to true the dialog will scanned barcode input via `SendExtensibilityHtmlDialogData`
- `ExtensibilityInPlaceHtmlDialogParameters`
 - o Namespace: `Micros.PosCore.Extensibility.UserInterface`
 - o Parameters object for raising in-place html dialog
 - o HTML
 - String property
 - Set to the HTML to be displayed in the dialog.
- `ExtensibilityWebDirectoryDialogParameters`
 - o Namespace: `Micros.PosCore.Extensibility.UserInterface`
 - o Parameters object for raising web directory dialogs
 - o `WebDirectoryZip`
 - Byte array property containing zipped image of web directory.
 - o `StartResource`
 - String property indicating the start resource to display. If none is specified, the default is "index.html".
 - If an extensibility application contains multiple dialogs sharing the same resources, this property allows multiple dialogs to be contained in one web directory.
 - o `ZipPassword`
 - String property set to the password if the zip file is password protected
- `OpsCustomDialogEventArgs`
 - o Namespace: `Micros.PosCore.Extensibility.Ops`
 - o Object passed to extensibility when the `POSDialogAPI.runExtensibilityEvent()` is called
 - o Sender
 - String property set to the value of the parameters `Sender` property when the dialog is raised.
 - o Command

- String property set to the `SimphonyPOSAPI_ExtensibilityEventParameters.command` property
 - o Argument
 - String property set to the `SimphonyPOSAPI_ExtensibilityEventParameters.argument` property
 - o Response
 - String property set by extensibility application and available to dialog in the `SimphonyPOSAPI_ApplicationResponse.response` property.
- `OpsResourceNotFoundEventArgs`
 - o Namespace: `Micros.PosCore.Extensibility.Ops`
 - o Object passed to the extensibility application in the `OpsResourceNotFoundEvent`
 - o URL
 - Read-only string property containing the URL of the invalid resource
 - o Sender
 - Read-only string property referring to the Sender property when raising the dialog
 - o `HttpMethod`
 - Read-only string indicating the method of the call (POST, GET, ...)
 - o `ResourceSupplied`
 - Boolean property set by extensibility application if it chooses to supply the resource
 - o `ResourceExtension`
 - String property set by the extensibility application to indicate the resource extension (jpg, png, ...)
 - o `BinaryResource`
 - Byte array property set by the extensibility application containing the binary resource if the resource is binary.
 - o `TextResource`
 - String property set by the extensibility application containing the text resource if the resource is text.
- `OpsCustomDialogDebugModeReadyArgs`
 - o Namespace: `Micros.PosCore.Extensibility.Ops`
 - o Object passed to the extensibility application in the `OpsCustomDialogDebugModeReady` event
 - o URL
 - Read-only string property containing the fully qualified URL to be rendered in a browser for that dialog instance.
 - The URL is randomized, it cannot be used across sessions.

SIM

- WaitForHtmlDialog
 - o SIM command to show the dialog
 - Parameter 1: Either a ExtensibilityInPlaceHtmlDialogParameters or ExtensibilityWebDirectoryDialogParameters object
 - Parameter 2: String value indicating the name of the dialog event to raise when the dialog closes. This parameter must contain only alphanumeric characters or an underscore. It cannot contain spaces or punctuation.
 - o This command returns control immediately to the SIM application.
- event dialog : *eventname*
 - o event raised when a SIM dialog closes.
 - o The *eventname* is the parameter in the WaitForHtmlDialog command
 - o @HtmlDialogResult is valid in this event.
- event extensibility_method : *methodname*
 - o This event is raised when the POSDialogAPI.runExtensibilityMethod() method is called
 - o The *methodname* is the method name specified in the dialog API call.
 - o @ExtensibilityMethodArgs is valid in this event.
- @HtmlDialogResult
 - o SIM string system variable containing the POSDialogAPI.closeDialog() data parameter.
 - o Valid only in the “event dialog” event.
- @ExtensibilityMethodArgs
 - o SIM object system variable containing extensibility method data
 - o Argument
 - Read-only string property containing the argument from the dialog.
 - o Response
 - String property containing the result passed back to the dialog