Oracle® Healthcare Foundation Installation Guide





Oracle Healthcare Foundation Installation Guide, Release 8.2.5

G30222-01

Copyright © 2020, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

	Preface	
	Documentation Accessibility	X
	Diversity and Inclusion	Х
	Related resources	Х
	Access to Oracle Support	Х
	Additional copyright information	xi
1	Overview	
	Software Requirements	1-1
	Media Pack Content	1-2
	General Guidelines for Installation	1-2
	Supported Upgrade Paths	1-3
	Where to Find the Product Documentation	1-3
Par	t Installation	
2	Data Model Installation	
	Install the Data Model without Pre-created User Schemas	2-1
	Check Prerequisites	2-1
	Prepare the Installer	2-2
	Run the Installer	2-2
	Check the Installation	2-6
	Install the Data Model with Pre-created User Schemas	2-6
	Check Prerequisites	2-7
	Oracle Healthcare Foundation Tablespaces	2-8
	Temporary Tablespaces	2-8
	Prepare the Installation Files	2-8
	Create Database Roles	2-9
	Create User Schemas	2-9
	Run the Installation Scripts	2-9
	Start the Installer	2-10





Prepare the Installer	5-2
Run the Installer	5-2
Check the Installation	5-4
Installing the Middle-Tier on a Secondary Node	5-4
Check Prerequisites	5-4
Prepare the Installer	5-5
Run the Installer	5-5
Check the Installation	5-6
JDBC GridLink Data Source Configuration (optional)	
Edit the Existing Generic Data Source	6-1
Create the JDBC GridLink Data Source	6-1
Oracle Healthcare Foundation Omics Data Bank Loaders Inst	allation
Prerequisites	7-1
Installing the Oracle Healthcare Foundation Omics Data Bank Loaders	7-1
Oracle Healtheare Foundation Solf Service Analytics Installati	on
	on
Installation Overview	on 8-1
Installation Overview Prerequisites	
Installation Overview Prerequisites	8-1 8-1 8-1
Prerequisites	8-1 8-1
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics	8-1 8-1 8-1
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server	8-1 8-1 8-1
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server Oracle Healthcare Foundation Installation on ADW (ODI)	8-1 8-1 8-3
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server Oracle Healthcare Foundation Installation on ADW (ODI) Data Model Installation on ADW	8-1 8-1 8-3 9-1
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server Oracle Healthcare Foundation Installation on ADW (ODI) Data Model Installation on ADW Prerequisites	8-1 8-1 8-3 9-1
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server Oracle Healthcare Foundation Installation on ADW (ODI) Data Model Installation on ADW Prerequisites Prepare the Installer	8-1 8-3 8-3 9-1 9-1
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server Oracle Healthcare Foundation Installation on ADW (ODI) Data Model Installation on ADW Prerequisites Prepare the Installer Run the Installer Check the Installation	8-1 8-1 8-3 9-1 9-1 9-3
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server Oracle Healthcare Foundation Installation on ADW (ODI) Data Model Installation on ADW Prerequisites Prepare the Installer Run the Installer	8-1 8-3 8-3 9-1 9-1 9-3
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server Oracle Healthcare Foundation Installation on ADW (ODI) Data Model Installation on ADW Prerequisites Prepare the Installer Run the Installer Check the Installation Data Management Assembly for OCI Marketplace Oracle Data Integrator Installation	8-1 8-1 8-3 9-1 9-1 9-3 9-3
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server Oracle Healthcare Foundation Installation on ADW (ODI) Data Model Installation on ADW Prerequisites Prepare the Installer Run the Installer Check the Installation Data Management Assembly for OCI Marketplace Oracle Data Integrator Installation Prerequisites	8-1 8-1 8-3 9-1 9-1 9-3 9-3 9-3
Installation Overview Prerequisites Install the Oracle Healthcare Foundation Self-Service Analytics Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server Oracle Healthcare Foundation Installation on ADW (ODI) Data Model Installation on ADW Prerequisites Prepare the Installer Run the Installer Check the Installation Data Management Assembly for OCI Marketplace Oracle Data Integrator Installation Prerequisites Prepare the Installer	8-1 8-1 8-3 9-1 9-1 9-3 9-3 9-3 9-4 9-5



10 Oracle Healthcare Foundation Installation on ADW DMA (Informatica)

DM Installation on ADW DB server

	Prerequisites	10-1
	Prepare the Installer	10-2
	Run the Installer	10-3
	Check the Installation	10-3
	DMA Installation on ADW DB server	10-3
	Prerequisites for ADW DMA	10-3
	Prepare the Installer for OHF DMA Install	10-4
	Run the DMA HMC Installer	10-5
	Check the Installation	10-5
	DMA Repository Installation on Informatica server	10-6
	Prerequisites	10-6
	Prepare the Installer for OHF INFA Repository Install	10-6
	Run the DMA Repository Installer	10-9
	Check the Installation	10-9
	Post-DMA Installation Steps	10-10
	Create Users in Repository Database	10-10
Part 11		
	Data Model Upgrade	
		11-1
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version	11-1
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare	
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version	11-4
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer	11-4 11-4
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer	11-4 11-4 11-5
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer Check the Installation	11-4 11-4 11-5 11-7
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer Check the Installation Data Migration	11-4 11-4 11-5 11-7 11-8
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer Check the Installation Data Migration Check the Migration Scripts	11-4 11-5 11-7 11-8 11-8
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer Check the Installation Data Migration Check the Migration Scripts Upgrading from Oracle Healthcare Foundation versions earlier than 7.0.1	11-4 11-4 11-5 11-7 11-8 11-8
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer Check the Installation Data Migration Check the Migration Scripts Upgrading from Oracle Healthcare Foundation versions earlier than 7.0.1 Upgrading from an Oracle Healthcare Foundation Version before 7.1	11-4 11-5 11-7 11-8 11-8 11-9
12	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer Check the Installation Data Migration Check the Migration Scripts Upgrading from Oracle Healthcare Foundation versions earlier than 7.0.1 Upgrading from an Oracle Healthcare Foundation Version before 7.1 Upgrading from Oracle Healthcare Foundation Versions Earlier than 8.0	11-4 11-5 11-7 11-8 11-8 11-9 11-10
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer Check the Installation Data Migration Check the Migration Scripts Upgrading from Oracle Healthcare Foundation versions earlier than 7.0.1 Upgrading from an Oracle Healthcare Foundation Version before 7.1 Upgrading from Oracle Healthcare Foundation Versions Earlier than 8.0 Execute Schema Migration Scripts After Modifications Data Management Assembly for Oracle Data Integrator Upgrade	11-4 11-5 11-7 11-8 11-8 11-9 11-10
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer Check the Installation Data Migration Check the Migration Scripts Upgrading from Oracle Healthcare Foundation versions earlier than 7.0.1 Upgrading from an Oracle Healthcare Foundation Version before 7.1 Upgrading from Oracle Healthcare Foundation Versions Earlier than 8.0 Execute Schema Migration Scripts After Modifications Data Management Assembly for Oracle Data Integrator Upgrade Check Prerequisites	11-4 11-5 11-7 11-8 11-8 11-9 11-10
	Check Prerequisites Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version Prepare the Installer Run the Installer Check the Installation Data Migration Check the Migration Scripts Upgrading from Oracle Healthcare Foundation versions earlier than 7.0.1 Upgrading from an Oracle Healthcare Foundation Version before 7.1 Upgrading from Oracle Healthcare Foundation Versions Earlier than 8.0 Execute Schema Migration Scripts After Modifications Data Management Assembly for Oracle Data Integrator Upgrade	11-4 11-5 11-7 11-8 11-8 11-9 11-10



10-1

	Check the Installation and Delete E\$_tables	12-7	
	Create a New Oracle Data Integrator Repository Login	12-7	
13	Data Management Assembly for Informatica Upgrade		
	Check Prerequisites	13-1	
	Prepare the Installer	13-3	
	Run the Installer	13-3	
	Check the Installation	13-7	
14	Middle-Tier Upgrade on the Primary Node		
	Check Prerequisites	14-1	
	Prepare the Installer	14-1	
	Run the Installer	14-2	
	Check the Installation	14-3	
15	Upgrade for ADW		
	Data Model Upgrade on ADW	15-1	
	Data Management Assembly for OCI Marketplace Oracle Data Integrator Upgrade	15-1	
Part	Uninstall		
rait	TII UIIIIStali		
16	Data Model Uninstall		
17	Data Management Assembly for Oracle Data Integrator Uninstall		
18	Data Management Assembly for Informatica Uninstall		
TO			
19	Middle-Tier Uninstall		
Part	IV Troubleshooting		



Data Model Troubleshooting	
Installation Log Files	20-1
Data Management Assembly for Oracle Data Integ	grator Troubleshooting
Installation Log Files	21-1
Troubleshooting Timezone Errors	21-2
Troubleshooting Guidelines	21-2
Data Management Assembly for Informatica Troub	oleshooting
Installation Log Files	22-1
Troubleshooting Timezone Errors	22-2
Troubleshooting Guidelines	22-2
Troubleshooting	22-2
ETL Performance Troubleshooting	22-3
Middle-Tier Troubleshooting	
Installation Log Files	23-1
Troubleshooting the Primary Node Installation	23-1
Troubleshooting the Secondary Node Installation	23-2
Troubleshooting Coherence Cluster Errors	23-2
Troubleshooting the JAVA_HOME Error	23-2
Configuration Guide for Exadata	
System Configuration	A-1
Exadata Component Configuration	A-1
Database Configuration	A-1
Database I/O Calibration	A-2
Resource Manager	A-2
Database Parameters	A-2
Parallel Degree Policy	A-3
Oracle Automatic Stats Job	A-4
Tablespace and Redo Log Recommendations	A-4
ASM Recommendations	A-4
Maximum Availability Recommendations	A-4
Application Considerations	A-4
General Recommendations	A-5
Oracle Healthcare Foundation	A-5
Cohort Data Model	A-5
	,



Omics Loaders A-5

B Configuration Guide for Non-Exadata

Database Configuration	B-1
Database I/O Calibration	B-1
Resource Manager	B-1
Database Parameters	B-2
Parallel Degree Policy	B-2
Parallel Degree Limit	B-3
Adaptive Tuning	B-3
Parallel Max Servers	B-3
Parallel Min Servers	B-3
Memory Settings	B-3
Processes	B-3
Oracle Automatic Stats Job	B-3
Tablespace and Redo Log Recommendations	B-4
ASM Recommendations	B-4
Application Considerations	B-4
General Recommendations	B-4
Oracle Healthcare Foundation	B-5
Cohort Data Model	B-5
Omics Loaders	B-5



Preface

This preface contains the following sections:

- Documentation Accessibility
- · Diversity and Inclusion
- Related resources
- Access to Oracle Support
- Additional copyright information

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

Related resources

All documentation and other supporting materials are available on the Oracle Help Center.

Access to Oracle Support

Oracle customers that have purchased support have access to electronic support through Oracle Support Cloud.

Contact our Oracle Customer Support Services team by logging requests in one of the following locations:

- English interface Customer Support Portal (https://hsgbu.custhelp.com/)
- Japanese interface Customer Support Portal (https://hsqbu-jp.custhelp.com/)

You can also call our 24x7 help desk. For information, visit https://www.oracle.com/life-sciences/support/ or visit https://www.oracle.com/corporate/accessibility/learning-support.html#support-tab if you are hearing impaired.



Additional copyright information

This documentation may include references to materials, offerings, or products that were previously offered by Phase Forward Inc. Certain materials, offerings, services, or products may no longer be offered or provided. Oracle and its affiliates cannot be held responsible for any such references should they appear in the text provided.



1

Overview

This document explains the installation and initial setup of Oracle Healthcare Foundation. The user installing Oracle Healthcare Foundation (OHF) should have knowledge of Oracle, Informatica or Oracle Data Integrator, Oracle WebLogic Server, and the Linux operating system.

The Oracle Healthcare Foundation installer lets you install the components below on the Linux OS in the following order:

- 1. Oracle Healthcare Foundation Data Model
- Oracle Healthcare Foundation Data Management Assembly for Oracle Data Integrator or

Oracle Healthcare Foundation Data Management Assembly for Informatica

3. Oracle Healthcare Foundation Middle-Tier



Oracle Healthcare Foundation should be installed by the same user who installed the RDBMS or Oracle WebLogic Server.

This chapter contains the following topics:

- Software Requirements
- Media Pack Content
- General Guidelines for Installation
- Supported Upgrade Paths
- Where to Find the Product Documentation

Software Requirements

Component	Software Required
Common requirements for all components	 Oracle Linux 6.7 (64-bit) or above, or Oracle Linux 7 (64-bit) operating system (OS) Oracle Database Enterprise Edition 19c (19.3 or above) with the
	 latest patches Python 2 (version 2.6.6 or above) or Python 3 (version 3.6.4 or above)
Data Model	No additional requirements



Component	Software Required
Data Management Assembly (Oracle Data Integrator)	 Oracle Data Integrator (ODI) 14.1.2.0.0 Standalone or Enterprise edition Oracle Fusion Middleware Infrastructure 14.1.2.0.0 is required for Oracle Data Integrator Enterprise edition Java Development Kit (JDK) 1.8 Oracle WebLogic Server 14.1.2.0.0 (optional)
Data Management Assembly (Informatica)	Informatica PowerCenter 10.2 or 10.4 or 10.5.3
Middle-Tier	You must install the Middle-Tier on a different Oracle WebLogic Server than the Oracle Data Integrator server.
	 Oracle Fusion Middleware Infrastructure 14.1.2.0.0 with Oracle WebLogic Server 14.1.2.0.0 Java Development Kit (JDK) 1.8 Update 111 (JDK 1.8 u111) or above
Self-Service Analytics (optional)	 Oracle Analytics Server (OBIEE) 14.1.2.0.0 (Oracle Analytics Server 14.1.2.0.0 is compatible with Oracle Fusion Middleware Infrastructure 14.1.2.0.0)
	 Oracle Analytics Developer Client Tools 14.1.2.0.0 Java Runtime Environment (JRE) 1.8 Update 111 (JRE 1.8 u111) or above

Media Pack Content

The media pack from the Oracle Software Delivery Cloud (OSDC) contains the installer for:

Oracle Healthcare Foundation Linux (p37792720_82500_Generic.zip)

General Guidelines for Installation

- Linux X-windows should be used for the Linux Oracle Universal Installer (OUI) installation (Linux Graphical User Interface).
- Before running the installer, be sure to backup all existing Oracle Healthcare Foundation schemas and any customizations.
- Before running the installer, make sure that the ORACLE_HOME and PATH environment variables are setup in your session. For example:

```
export ORACLE_HOME=/u01/app/oracle/product/19.3
```

export PATH=\$PATH:\$ORACLE HOME/bin

- When re-executing the installer due to a failure, enter the same details in the question prompting phase at all times. Do not delete any objects in the installation folder.
- When re-executing the installer, if you receive OUI-10030 error messages, ignore the
 messages to continue using the existing Oracle Healthcare Foundation installation HOME
 path.
- Convert the installer execution shell to an SH shell as the installer script executes in the SH shell of the Linux OS.
- Text enclosed within <> in the following chapters indicate parameters and you must provide an appropriate value.



Supported Upgrade Paths

The following are the supported upgrade paths:

- HDWF 6.1/OHADI 3.1 to Oracle Healthcare Foundation 8.2.5
- Oracle Healthcare Foundation 7.0.1 to Oracle Healthcare Foundation 8.2.5
- Oracle Healthcare Foundation 7.1 to Oracle Healthcare Foundation 8.2.5
- Oracle Healthcare Foundation 7.1.x to Oracle Healthcare Foundation 8.2.5
- Oracle Healthcare Foundation 8.x to Oracle Healthcare Foundation 8.2.5
- Oracle Healthcare Translational Research 3.1.0.2/3.1.0.3/3.1.0.4 to Oracle Healthcare Foundation 8.2.5

To upgrade the OHF Middle Tier from Oracle Healthcare Foundation, uninstall the existing oh_domain and applications and install Oracle WebLogic Server 14.1.2.0.0. Then do a fresh Oracle Healthcare Foundation 8.2.5 Middle Tier installation (see Middle-Tier Installation).

Where to Find the Product Documentation

The product documentation is available from the following locations:

- My Oracle Support (https://support.oracle.com)
- Oracle Help Center (https://docs.oracle.com/en/industries/health-sciences/healthcare-foundation/index.html)

If the software is available for download, the documentation set is available from the Oracle Software Delivery Cloud (https://edelivery.oracle.com). All documents may not be updated for every release. Therefore, the version numbers for the documents in a release may differ.



Part I

Installation

In this chapter:

- Data Model Installation
- Data Management Assembly for Oracle Data Integrator Installation
- Data Management Assembly for Informatica Installation
- Middle-Tier Installation
- JDBC GridLink Data Source Configuration (optional)
- Oracle Healthcare Foundation Omics Data Bank Loaders Installation
- Oracle Healthcare Foundation Self-Service Analytics Installation
- Oracle Healthcare Foundation Installation on ADW (ODI)
- Oracle Healthcare Foundation Installation on ADW DMA (Informatica)



Data Model Installation

This chapter describes how to install the Oracle Healthcare Foundation Data Model. There are two ways to install the Data Model, depending on how you create the user schemas. The installer can create the user schemas during the installation or you can create them manually, prior to the installation

For more information, see:

- Install the Data Model without Pre-created User Schemas
- Install the Data Model with Pre-created User Schemas

Install the Data Model without Pre-created User Schemas

This section describes how to install the Data Model by using the installer to create fresh user schemas. Please complete the following:

- Check Prerequisites
- · Prepare the Installer
- Run the Installer
- Check the Installation

Check Prerequisites

-	Prerequisites
	Install Oracle Database Enterprise Edition 19c (19.3) with the latest patches.
	Make sure that the database compatible parameter is set to 19.3.0.0.0 or higher by connecting to the DBA user and running the query below:
	<pre>select * from v\$parameter where name = 'compatible';</pre>
	Ensure the parameter is set to 19.3.0.0.0 or higher.
	Create a container database with a single pluggable database instance with the help of a Oracle Database Administrator (optional).
	Make sure the database initialization parameter MAX_STRING_SIZE is set to STANDARD (default value).
	Note that this parameter cannot be changed to STANDARD if the database is created with MAX-STRING_SIZE set to EXTENDED.
	Set the NLS_LENGTH_SEMANTICS parameter to either CHAR or BYTE, based on your requirements.
	For Oracle Healthcare Foundation Globalization Support information, see <i>Oracle Database Globalization Support Guide</i> and set your database character set accordingly.
	Make sure that the password expiry notification message does not display for the sys and system schemas.



	- Prerequisites
	To create an encrypted tablespace during the installation, set up your environment for tablespace encryption. For more information, see <i>Oracle Database Advanced Security Guide 12.2</i> . The installer only creates the tablespace and does not handle prerequisites like setting up the keystore, opening it, and so forth. The installer only checks whether the keystore is open if the sys and system passwords are provided during the installation.
	Verify if you have a database license for Advanced Compression.
	Set the GLOBAL_NAMES database initialization parameter to false.
	If you are installing Oracle Healthcare Foundation on an Exadata database machine, see the Exadata Machine and Exadata Implementation sections in the <i>Oracle Healthcare Foundation Programmer's Guide</i> .
	For remote installations, make sure the following are available on the client machine:
	Oracle Linux 6.7 (64-bit) OS or above
	 Oracle Database Enterprise Edition 19c (19.3) with the latest patches and with the Sqlplus utility Client machine should contain Oracle client. If it does not have the client, install Oracle Instant Client. Refer to the Troubleshooting section for Install and Configure Oracle Instant Client.
	Verify the database connectivity through SERVICE_NAME. Make sure that you are connecting to the pluggable database (PDB) if installing in a container-based environment.
	Verify the database connectivity using the following command:
	SQL>connect username@hostname:port number/service name orsqlplususername@'(DESCRIPTION=(ADDRESS=(PROTOCOL=TCP)(HOST=dbhost) (PORT=dbport))
	(CONNECT_DATA=(SERVICE_NAME=dbservicename)))'
	The installer does not validate the tablespace data files location. If the database server is on the remote server, make sure the location physically exists or the installer will fail.
Prepare the	Installer
	- Steps
	The Oracle Healthcare Foundation 8.2.5.0.0 software is available for download from My Oracle Support https://support.oracle.com/ (available for registered users) with Patch number: 37792720
	Extract the contents of the Oracle Healthcare Foundation media pack to your system.
	Open the <i>media_pack_locationl</i> folder.
	Unzip the p37792720_82500_Generic.zip file where you want to launch the installer using the following command:
	unzip -a p37792720_82500_Generic.zip
	Open the Disk1/install folder.
	Change the protection on the files as follows: chmod 755 *

Run the Installer

Start the Oracle Universal Installer (OUI) using the following command:

If the database server (Exadata or non-Exadata) is on the machine where the installer is running, execute:

sh runInstaller.sh -local

• If the database server is on a different machine, execute: sh runInstaller.sh -local remote_installation=true

where the -local option is to install on the local node irrespective of the cluster nodes specified on the installer machine.

- Screen	Action
Welcome	Click Next.
Select a Product to Install	Select the Oracle Healthcare Foundation Data Model 8.2.5.0.0 option.
Specify Home Details	Enter the installation home name and location.
Verify Installation Prerequisites	Verify if all the prerequisites are met before proceeding.
Oracle Client Home Configuration	Specify the Oracle (version 19.3.0.0.0) client home path.
Database	Enter values for the following fields:
Configuration	 Hostname - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port - By default, the port number is 1521. You can edit this field if required. Service name System user password Sys user password
Table Compression	On an Exadata setup, use the following compression options:
Table Compression	Interface Tables schema
	Hybrid columnar compression (default)
	No Compression
	Data Warehouse schema
	No Compression (default)
	 Advanced Compression: Preferred if updates are high. If you don't have a license for Advanced Compression, select Hybrid Columnar Compression.
	Hybrid Columnar Compression
	Common Data Mart schema
	No Compression (default)
	Advanced Compression
	Cohort Data Mart schema
	No Compression (default)
	Advanced Compression
	Omics Data Bank schema
	Hybrid columnar compression (default)
	On a non-Exadata setup, for each of the above schemas, choose either No Compression (default) or Advanced Compression if it is licensed.



- Screen	Action
Data Model Configuration	Enter values for the following fields: Interface Tables schema name Interface Tables schema password Data Warehouse schema name Data Warehouse schema password Common Data Mart schema name Common Data Mart schema password Omics Data Bank schema name Omics Data Bank schema password
Data Model Configuration Data Model Configuration	Enter values for the following fields: Cohort Data Mart schema name Cohort Data Mart password Enterprise schema name Enterprise schema password Job Engine schema name Job Engine schema password Services schema name Services schema password Enter values for the following fields: Clinical Genomics (cga) schema name Clinical Genomics (cga) password
Data Model Configuration Verification	Click Next.
Tablespace Data File Location	Specify the location of the Tablespace data files. This is the directory on the database server where the data files are created during the installation. For example: Unix: /u01/oradata/dbname ASM: +DATA_EX02/hashas01/datafile Note: The ASM location must always start with +. The path should not end with /.



Screen Action The installer creates the following tablespaces. Make sure that these **Tablespace Details** tablespaces do not exist in the database. hdi_ts - Default tablespace used for Interface tables (hdi) schema hdm_ts - Default tablespace used for Data Warehouse (hdm) schema hcd_ts - Default tablespace used for Common Data Mart (hcd) schema odb_data_ts - Default tablespace used for Omics Data Bank (odb) schema odb_index_ts - Tablespace used for indexes of the Omics Data Bank (odb) schema odb_lob_ts - Tablespace used for LOB columns in the Omics Data Bank (odb) schema cdm_data_ts - Default tablespace used for Cohort Data Mart (cdm) schema cdm_index_ts - Tablespace used for indexes of the Cohort Data Mart (cdm) schema ent_ts - Default tablespace used for Enterprise (ent) schema job data ts - Default tablespace for Job Engine (job) schema job_index_ts - Tablespace used for indexes of the Job Engine (job) schema job_store_ts - Database File System (DBFS) store is created as part of the Job Engine installation job lob ts - Tablespace used to store LOB data in the DBFS store created for the JOB ENGINE schema user job_tbs_ts - Tablespace used for the DBFS store created for the JOB_ENGINE schema svc_ts - Default tablespace used for services schema (svc) api ts - Default tablespace used for Clinical Genomics schema (cga) For each schema, you can edit the default tablespace name, initial size, max size, and tablespace encryption. Temporary The installer creates the following tablespaces. Make sure that these Tablespace Details tablespaces do not exist in the database. hdi_temp - Temporary tablespace for the Interface tables schema (hdi) hdm_temp - Temporary tablespace for the Data Warehouse schema (hdm) hcd_temp - Temporary tablespace for the Common Data Mart schema (hcd) odb_temp - Temporary tablespace for the Omics Data Bank schema cdm_temp - Temporary tablespace for the Cohort Data Mart schema ent_temp - Temporary tablespace for the Enterprise schema (ent) job_temp - Temporary tablespace for the Job Engine schema (job) svc_temp - Temporary tablespace for the Services schema (svc) api_temp - Temporary tablespace used for Clinical Genomics schema

(cga)

For each schema, you can edit the temporary tablespace name, initial size, and max size.



Screen	Action
Omics Data Bank and	Enter values for the following fields:
Cohort Data Mart Parameters	 Result Partition - Used to partition result tables in the ODB schema. The available options are: GENE (Default)
	 Promoter Offset - Numerical value to specify a portion of the gene used as a promoter in the ODB schema. The default value is 200.
	 Flanking Offset - Numerical value to specify the region before and after a gene to link results to a gene in the ODB schema. The default value is 200.
	 Max Parallel Degree - An option to specify the maximum degree of parallelism to be set on tables or used in the SQL statements for the CDM or ODB schema. It is dependent on the machine configuration of the database server. The default value is 2.
	 Job Store Name - If you are using the same database instance for multiple environments, enter a unique job store name for each job schema.
Summary	Click Install.
End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.

Install the Data Model with Pre-created User Schemas

Contact Oracle support, if necessary, to resolve any errors.

This section describes how to install the Data Model by creating Oracle Healthcare Foundation user schemas and tablespaces outside the installer, then using the installer to create database objects in the respective user schemas. Please complete the following:

Review the generated installation log files for errors. For details, see Installation Log Files.

- Check Prerequisites
- Oracle Healthcare Foundation Tablespaces
- Temporary Tablespaces
- Prepare the Installation Files
- Create Database Roles
- Create User Schemas
- Run the Installation Scripts
- Start the Installer
- · Run the Installer
- Check the Installation
- Revoke Privileges



Check the

Check Prerequisites

- Prerequisites
Make sure Oracle Database Enterprise Edition 19c (19.3 or above) with the latest patches is installed.
Make sure that the database compatible parameter is set to 19.3.0.0.0 by connecting to the DBA user and running the query below:
<pre>select * from v\$parameter where name = 'compatible';</pre>
If the parameter is not set to 19.3.0.0.0, ask your database administrator to set it.
Make sure the database initialization parameter MAX_STRING_SIZE is set to STANDARD (default value). This parameter cannot be changed to STANDARD if the database was created with MAX_STRING_SIZE set to EXTENDED.
Set the NLS_LENGTH_SEMANTICS parameter to either CHAR or BYTE, based on your requirements.
For Oracle Healthcare Foundation Globalization Support information, see <i>Oracle Database Globalization Support Guide</i> and set your database character set accordingly.
Make sure that the password expiry notification message does not display for the sys and system schemas.
To create an encrypted tablespace during the installation, set up your environment for tablespace encryption. For more information, see <i>Oracle Database Advanced Security Guide 12.2</i> . The installer only creates the tablespace and does not handle prerequisites like setting up the keystore, opening it, and so forth. The installer only checks whether the keystore is open if the sys and system passwords are provided during the installation.
Verify if you have a database license for Advanced Compression.
Set the GLOBAL_NAMES database initialization parameter to false.
If you are installing Oracle Healthcare Foundation on an Exadata database machine, see the Exadata Machine and Exadata Implementation sections in the <i>Oracle Healthcare Foundation Programmer's Guide</i> .
For remote installations, make sure the following are available on the client machine: Oracle Linux 6.7 (64-bit) OS or above Oracle Database Enterprise Edition 19c (19.3) with the latest patches Client machine should contain Oracle client. If it does not have the client, install Oracle Instant Client. Refer to the Troubleshooting section for Install and Configure Oracle Instant Client.
Enable a database connection through SERVICE_NAME. Make sure that you are connecting to the pluggable database (PDB) if you are installing in a container-based environment. Verify the database connectivity using the following commands:
SQL>connect username@hostname:port number/service name
or
<pre>sqlplus username@'(DESCRIPTION=(ADDRESS=(PROTOCOL=TCP)(HOST=dbhost) (PORT=dbport))(CONNECT_DATA=(SERVICE_NAME=<dbservicename>)))'</dbservicename></pre>
Make sure that the Sqlplus utility is available in the installation server.



Oracle Healthcare Foundation Tablespaces

Create the following default tablespaces. You can use different tablespace names than the ones listed below.

- Tablespace Name	Big File Tablespace	Description
hdi_ts	Yes	Default tablespace for the Interface Tables (hdi) schema
hdm_ts	Yes	Default tablespace for the Data Warehouse (hdm) schema
hcd_ts	Yes	Default tablespace for the Common Data Mart (hcd) schema
odb_data_ts	Yes	Default tablespace for the Omics Data Bank (odb) schema
odb_index_ts	Yes	Used for indexes of the Omics Data Bank (odb) schema
odb_lob_ts	Yes	Used for LOB columns in the Omics Data Bank (odb) schema
cdm_data_ts	Yes	Default tablespace for the Cohort Data Mart (cdm) schema
cdm_index_ts	Yes	Used for indexes of the Cohort Data Mart (cdm) schema
ent_ts	No	Default tablespace for the Enterprise (ent) schema
job_data_ts	No	Default tablespace for the Job Engine (job) schema
job_index_ts	No	Used for indexes of the Job Engine (job) schema
job_store_ts	No	Database File System (DBFS) store created as part of the Job Engine installation
job_lob_ts	No	Name of the tablespace to store LOB data in the DBFS store created for the JOB ENGINE schema user
job_tbs_ts	No	Name of the tablespace to be used for the DBFS store created for the JOB_ENGINE schema
svc_ts	No	Default tablespace used for the Services (svc) schema
api_ts	No	Default tablespace for the Clinical Genomics (cga) API schema.

Temporary Tablespaces

Oracle Healthcare Foundation loaders and ETLs require a large temporary tablespace for sorting. A dedicated bigfile temporary tablespace or a single temporary tablespace group should be assigned to all Oracle Healthcare Foundation schemas.

Prepare the Installation Files

-	Preparations
	Extract the contents of the Oracle Healthcare Foundation media pack to your system.



- Preparations
Open the media_pack_location folder.
Unzip the $p37792720_82500_Generic.zip$ file where you want to launch the installer using the following command:
unzip -a p37792720_82500_Generic.zip

Create Database Roles

-	Instructions		
	Navigate to the directory <media_pack_location>/Disk1/stage/Components/ oracle.hsgbu.hc.datamodel/8.2.5.0.0/1/DataFiles/Expanded/ filegroup1 .</media_pack_location>		
	Unzip the master_install.zip file.		
	Connect to Oracle SYS from the extracted content and create database roles by executing the roles.sql script.		

Create User Schemas

Create the following user schemas and assign the appropriate default and temporary tablespaces. Refer to Oracle Healthcare Foundation Tablespaces and Temporary Tablespaces for details. If you created tablespaces with different names, use those names instead.

-	Schema	Default Tablespace	Temporary Tablespace
	Interface Tables (hdi)	hdi_ts	temp
	Data Warehouse (hdm)	hdm_ts	temp
	Common Data Mart (hcd)	hcd_ts	temp
	Omics Data Bank (odb)	odb_data_ts	temp
	Cohort Data Mart (cdm)	cdm_data_ts	temp
	Enterprise (ent)	ent_ts	temp
	Job Engine (job)	job_data_ts	temp
	Services (svc)	svc_ts	temp
	Clinical Genomics (cga)	api_ts	temp

Run the Installation Scripts

Execute the following scripts/commands as a DBA user. When prompted, enter the respective schema names.

When prompted for the application role, enter <code>OHF_APPLICATION_ROLE</code>.

- Scripts
@hdi_install/grant_schema_priv.sql
<pre>@hdm_install/grant_schema_priv.sql</pre>
<pre>@hcd_install/grant_schema_priv.sql</pre>
<pre>@odb_install/grant_schema_priv.sql Execute the following commands:</pre>
Execute the following command: > ALTER USER cdm QUOTA UNLIMITED on cdm_index_ts
@enterprise_install/grant_schema_priv.sql
@job_install/grant_schema_priv.sql Execute the following commands:
> ALTER USER job QUOTA UNLIMITED on job_index_ts > ALTER USER job QUOTA UNLIMITED on job_store_ts > ALTER USER job QUOTA UNLIMITED on job_lob_ts > ALTER USER job QUOTA UNLIMITED on job tbs ts
@svc_install/grant_schema_priv.sql

Start the Installer

-	Steps
	Make sure that all the Oracle Healthcare Foundation schemas are disconnected from the databas by querying gv_\$session from the sys user:
	<pre>select * from sys.gv_\$session where status <> 'KILLED' and username in ('<ohf schemas="">');</ohf></pre>
	Navigate to the media_pack_location/Disk1/install folder.
	Change the protection on the files as follows:



-	Steps
Г	Start the Oracle Universal Installer (OUI) using the following command:
	• If the database server is on the machine where the installer is running and is an Exadata instance: sh runInstaller.sh -local dba_tasks=false db_platform=exadata
	 If the database server is on the machine where the installer is running and is a non-Exadata instance: sh runInstaller.sh -local dba_tasks=false db_platform=default
	• If the database server is on a different machine and is an Exadata instance: sh runInstaller.sh -local remote_installation=true dba_tasks=false db_platform=exadata
	• If the database server is on a different machine and is a non-Exadata instance: sh runInstaller.sh -local dba_tasks=false db_platform=default remote_installation=true

The <code>-local</code> option tells the installer to install on the local node, irrespective of the cluster nodes specified on the installer machine.

The dba tasks=false option tells the installer not to create user schemas and tablespaces.

Run the Installer

- Screen	Action
Welcome	Click Next.
Select a Product to Install	Select the Oracle Healthcare Foundation Data Model 8.2.5.0.0 option.
Specify Home Details	Enter the installation home name and location.
Verify Installation Prerequisites	Verify if all the prerequisites are met before proceeding.
Oracle Client Home Configuration	Specify the Oracle (version 19.3.0.0.0) client home path. The installer validates this path.
Database	Enter values for the following fields:
Configuration	 Hostname - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port - By default, the port number is 1521. You can edit this field if required.
	Service name
	The installer will not validate the database connectivity. Make sure that you are able to connect to the database from SQLPlus.



-	Screen	Action		
	Table Compression	On an Exadata setup, use the following compression options:		
	•	Interface Tables schema		
		Hybrid columnar compression (default)		
		No Compression		
		Data Warehouse schema		
		No Compression (default)		
		 Advanced Compression: Preferred if updates are high. If you don't have a license for Advanced Compression, select Hybrid Columnar Compression. 		
		Hybrid Columnar Compression		
		Common Data Mart schema		
		No Compression (default)		
		Advanced Compression		
		Cohort Data Mart schema		
		No Compression (default)		
		Advanced Compression		
		Omics Data Bank schema		
		 Hybrid columnar compression (default) On a non-Exadata setup, for each of the above schemas, choose either No Compression (default) or Advanced Compression. 		
	Data Model	Enter values for the pre-created schemas:		
ш	Configuration	Interface Tables schema name		
		Interface Tables schema password		
		Data Warehouse schema name		
		Data Warehouse schema password		
		Common Data Mart schema name		
		Common Data Mart schema password		
		Omics Data Bank schema name		
		Omics Data Bank schema password		
	Data Model	Enter values for the pre-created schemas:		
	Configuration	•		
		Cohort Data Mart password		
		Conort Bata Mart password		
		Enterprise seriema name		
		Enterprise schema password Lob Faring scheme page		
		Job Engine schema name Job Engine schema name		
		Job Engine schema password		
		Services schema name		
		Services schema password		
	Data Model Configuration	Enter values for the pre-created schemas:		
		Clinical Genomics (cga) schema name		
		Clinical Genomics (cga) password		
	Data Model Configuration Verification	Click Next.		
	Tablespace Details	Click Next.		
	Temporary Tablespace Details	Click Next.		



	- Screen	Action
	Omics Data Bank and	Enter values for the following fields:
	Cohort Data Mart Parameters	 Result Partition - Used to partition result tables in the ODB schema. The available options are: GENE (Default)
		 Promoter Offset - Numerical value to specify a portion of the gene used as a promoter in the ODB schema. The default value is 200. Flanking Offset - Numerical value to specify the region before and after a gene to link results to a gene in the ODB scheme. The default value is
		a gene to link results to a gene in the ODB schema. The default value is 200.
		 Max Parallel Degree - An option to specify the maximum degree of parallelism to be set on tables or used in the SQL statements for the CDM or ODB schema. It is dependent on the machine configuration of the database server. The default value is 2.
		Job Store Name - Use the job schema name.
		Execute the following query to find all store names in the database (created by all previous installations) by connecting to the SYS user:
		<pre>SELECT DISTINCT owner,object_type,object_name,created FROM all_objects WHERE object_name LIKE '%JOB_STORE%';</pre>
		Note: If you have store names in the database that do not match the %JOB_STORE% pattern, run the following query to find the correct names:
		<pre>SELECT DISTINCT owner,object_type,object_name,created FROM all_objects WHERE owner = Job Username/schemaname AND object_type IN ('TABLE','VIEW');</pre>
	Tablespace Parameters	Enter values for the fields below from the existing or pre-created CDM, ODB, and Job engine schemas. Make sure that these tablespaces exist or were created before the installation. Refer to Oracle Healthcare Foundation Tablespaces for the tablespace names to be used.
		cdm_index_ts_name
		 odb_index_ts_name
		• odb_lob_ts_name
		• job_index_ts_name
		• job_lob_ts_name
		• job_tbs_ts_name
	Summary	Click Install.
	End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.
Check the Ir	nstallation	
	- Steps	
		installation log files for errors. For details, and Installation Log Files
	Review the generated	installation log files for errors. For details, see Installation Log Files.
	Contact Oracle suppor	t, if necessary, to resolve any errors.

Revoke Privileges

After the Cohort Data Mart (CDM) and Omics Data Bank (ODB) data model installation, connect to the database user with the DBA privilege, and execute the following scripts to revoke privileges:

REVOKE CREATE ANY DIRECTORY FROM odb user REVOKE CREATE ANY CONTEXT FROM cdm user where,

odb_user is the ODB schema name.

cdm_user is the CDM schema name.



Data Management Assembly for Oracle Data Integrator Installation

This chapter describes how to install the Oracle Healthcare Foundation Data Management Assembly for Oracle Data Integration (ODI). There are two ways to install the Data Management Assembly for ODI, depending on how you create the user schemas. The installer can create the user schemas during the installation or you can create them manually, prior to the installation. The two methods are described below:

- Installing the Data Management Assembly without Pre-Created User Schemas
- Installing the Data Management Assembly with Pre-Created User Schemas

Installing the Data Management Assembly without Pre-Created User Schemas

Complete the following:

- Check Prerequisites
- · Prepare the Installer
- Run the Installer
- Check the Installation
- Create a New Oracle Data Integrator Repository Login

Check Prerequisites

- Steps
The user is familiar with Oracle Database (DB), Oracle Data Integrator, and Linux OS.
The Oracle Healthcare Foundation Data Model is installed.
Follow the instructions in Data Model Installation or Data Model Upgrade.
The Data Management Assembly installer is run on the system where the Oracle Data Integrator server is installed.
Make sure that the database compatible parameter is set to 19.3.0.0.0 by connecting to the DBA user and running the query below:
<pre>select * from v\$parameter where name = 'compatible';</pre>
If the parameter is not set to 19.3.0.0.0, ask your database administrator to set it.
Oracle Data Integrator services can connect to the Data Model 8.2.5 database mentioned in the Oracle TNS file (TNS entries of the required database must be available in the installation server tnsnames.ora file).
The password expiry notification message does not display for the system user.



-	Steps
	Check write permissions on oralnventory is granted to "others". If write permissions are not granted then add the user that the oracle software being installed to the group of the inventory owner (for instance - oinstall) as root:
	<pre>usermod -a -G <ora inventory="" owner=""> <installation_user></installation_user></ora></pre>
	The terminology loaders source file location exists. The installer creates an archive directory. For example,
	$/ \verb scratch/home/oemora/TL_Source is the source file location specified during installation, which already exists.$
	$/ \verb scratch/home/oemora/TL_Archive_Files is created by the installer as the archive directory.$
	The path of the data file (Configuration schema/Repository schema tablespace) mentioned when creating the tablespace is correct. Make sure that the database user has write privileges.
	Enough space is available in the installation directory and the Oracle Home directory.
	The Sqlplus utility is available on the installation server.
	The impdp utility is available on the repository database server.
	The installation user has read, write, and execute privileges to the <code>\$ODI_HOME/odi/agent/bin</code> folder. The installer creates product specific files under this location.
	For remote installations, where the installation server and the Oracle Data Integrator Repository Database server are different machines, make sure that:
	 A directory from the remote database server is mounted to the installation server with appropriate read and write privileges.
	The remote directory is accessible from the installation server on mounting.
	 The user that owns Oracle db services on the remote server has privilege 755 for the directory that was mounted on the installation server.
	 If the database is on an Exadata machine, provide the database single node (the node which is mounted) as the host name when prompted during installation.
	 ODI app machine should contain Oracle client. If it does not have the client, install Oracle Instant Client. Refer to the Troubleshooting section for Install and Configure Oracle Instant Client.
	GLOBAL_NAMES database initialization parameter is set to false.
	In case of an Oracle Healthcare Foundation upgrade, back up the following csv files under <code>\$ODI_HOME/odi/agent/bin</code> if it exists:
	• bus_susp_day.csv
	• daylght_svngs_day.csv
	• hosp_hol_day.csv
	• time_odi.csv



Steps

In case of an Oracle Healthcare Foundation upgrade, if the Terminology Loaders source folder is shared, make a backup of the following files:

- Code Axes.txt
- Code Descriptions.txt
- Code Hierarchy.txt
- Code.txt
- Related Entity.txt
- Relations Type.txt
- Relations.txt
- Relationship Type.txt
- time.txt

The installer will overwrite any existing files from the list above.



The installer auto-populates some of the user parameters and lets you edit them.

Prepare the Installer

- Steps	
Extract the contents of the Oracle Healthcare Foundation media pack to your system.	
Navigate to the <i>media_pack_locationl</i> folder.	
Unzip the p37792720_82500_Generic.zip file where you want to launch the installer usin the following command: unzip -a p37792720_82500_Generic.zip	g
Navigate to the Disk1/install folder.	
Change the protection on the files as follows: chmod 755 *	

Run the Installer

Start the Oracle Universal Installer by running the following command:

- If the Oracle Data Integrator repository schemas (master and work) to be created are on the database instance of the installation server, execute:
 - sh runInstaller.sh -local
- If the Oracle Data Integrator repository database or Oracle Healthcare Foundation data model database is on the database instance of another server, execute:

```
sh runInstaller.sh -local remote installation=true
```

where, the -local option is to install on the local node irrespective of the cluster nodes specified on the installer machine.



-	Screen	Action
	Welcome	Click Next.
	Select a Product to Install	Select the Oracle Healthcare Foundation Data Management Assembly for ODI 8.2.5.0.0 option.
	Specify Home Details	Enter the installation home path.
	Verify Installation Prerequisites	Verify if all the prerequisites are met before proceeding.
	Select the Oracle Home Configuration	Specify the Oracle client home path.
	Select the Oracle Data Integrator Home Location	Specify the Oracle Data Integrator home location. The Oracle Data Integrator home should be one level above the / oracle_common directory. For example: /u01/app/oracle/Oracle_ODI1.
	Select the Database Server for the Oracle Data Integrator Repository Schemas	Select one of the following options for the Oracle Data Integrator repository schemas: If the Oracle Data Integrator repository database server is on the installation server, select the Installation database server option.
100000		• Else, select the Remote database server option.
	Specify Mount Path Details (applicable	Enter the configuration details for the mounted remote server directory:
	only for remote	Mounted directory path on the remote server
	installations)	 Mount path on the installation server To obtain the available storage drives, on the Linux machine, execute the df h command. If the remote server directory is mounted on the installation server, the mounting is displayed as follows:
		Remote Server name: Remote server path total size used up space Available space use% Path in installation server where mounting was done
		For example,
		abc:/scratch/dump 191G 138G 44G 76% /installation server
		Note:
		 The directory of the remote database server should be mounted to the installation server with appropriate read and write privileges for the IMPDB utility.
	Specify Healthcare Data Model Database Instance Details	 If the remote server mounted path is displayed as I, provide the absolute mounted path of the remote server.
		Enter values for the following fields:
Ш		 Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine.
		Port number
		Service name
		 System user password Select this database instance for repository schema creation If you select Yes, the installer uses the same Data Model database instance for Oracle Data Integrator repository schema creation.



-	Screen	Action
	Specify Oracle Data Integrator Repository Database Instance Details (applicable only if you selected No in the previous screen for Select this database instance for repository schema creation)	 Enter values for the following fields: Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port Service name System user password
	Specify Oracle Data Integrator Supervisor Password	Specify the supervisor password used for the Oracle Data Integrator console login.
	Select Terminology Loaders Source Location	Specify the Terminology loaders source file location. This location is used to read the terminology loaders source data files. You can change this location when required. The installer creates an archive directory at the same level as the source directory. Make sure that the create directory privileges exist for the installation user.
	Specify Healthcare Data Model Schema Details	 Enter values for the following fields: Interface table schema name Interface table schema password Data warehouse schema name Data warehouse schema password Common data mart (hcd) schema name Common data mart (hcd) schema password Cohort data mart (cdm) schema name Cohort data mart (cdm) schema password
	Specify Healthcare Data Model Schema Details	 Enter values for the following fields: Enterprise schema name Enterprise schema password.
	Specify Warehouse Integration Loader Details	 Enter values for the following fields: Configuration schema name Configuration schema password: Specify WIL configuration schema user and password details. Installer creates new schema for a fresh installation. Specify existing schema user and password details for upgrade.
	Specify OHF Repository Schema Details	 Specify OHF repository schema details OHF ODI repository schema name OHF ODI repository schema password Specify the OHF Repository schema user and password details. The Installer creates new Repository schema.
	Specify Healthcare Common Data Mart Loader Details	 Enter values for the following fields: Configuration schema name Configuration schema password Specify the new schema names for the HCD configuration schema, for upgrade specify the existing HCD configuration schema name.



Password Oracle D 3 schem. RCC RCC RCC Note: Th It cannot of the pre Specify a Reposito Note: Th long and a numbe ecify the ecify Tablespace Creation of Oracle a Integrator inporary Objects Pecify Tablespace Creation for oracle re compone ecify Tablespace creation for oracle cre	Uprefix_STB Uprefix_WLS Uprefix_WLS_RUNTIME e RCU Prefix must be unique. The prefix should be alphabetic have special characters and cannot start with a number. The least must not exceed 8 characters. In password for schemas created using the Oracle Data Integrative Creation Utility (RCU). In password must be between 8 and 12 alphanumeric character must include at least one number. The password cannot start with the tablespace names for the configuration schemas. The install these tablespaces if they do not exist. In pository schema default tablespace name applies pace names for the creation of temporary objects used by the password control of the tablespace names for the creation of temporary objects used by the password control of the tablespace names ablespace names for the creation of temporary objects used by the password control of the tablespace names ablespace names for the creation of temporary objects used by the password control of temporary objects used by the password
RCC Note: The lit cannot of the prospectify a Repositor Note: The long and a number of the prospectify the plespace Details Pecify the plespace Creation of Oracle of the prospectify Tablespace Creation of Oracle at Integrator Inporary Objects Pecify Tablespace Creation for Oracle recomponer of the locat privileges of the Oracle recomponer of the locat privileges of the Integration of Integration of the Integration of Integration	I prefix_WLS I prefix_WLS_RUNTIME e RCU Prefix must be unique. The prefix should be alphabetic have special characters and cannot start with a number. The lefix must not exceed 8 characters. It password for schemas created using the Oracle Data Integrating Creation Utility (RCU). It is password must be between 8 and 12 alphanumeric character must include at least one number. The password cannot start for the tablespace names for the configuration schemas. The instances tablespaces if they do not exist. In the schema default tablespace name assistory schema temporary tablespace name ablespace names for the creation of temporary objects used by ata Integrator Loaders. The installer creates these tablespaces not exist. In the schema temporation Loaders
RCC Note: The lt cannot of the prospective Repositor Rep	Prefix_WLS_RUNTIME e RCU Prefix must be unique. The prefix should be alphabetic have special characters and cannot start with a number. The left must not exceed 8 characters. It password for schemas created using the Oracle Data Integratory Creation Utility (RCU). It password must be between 8 and 12 alphanumeric character must include at least one number. The password cannot startor. In the tablespace names for the configuration schemas. The installation is tablespace if they do not exist. In the schema default tablespace name pository schema temporary tablespace name ablespace names for the creation of temporary objects used by ata Integrator Loaders. The installer creates these tablespaces integration Loaders.
Note: The It cannot of the present o	e RCU Prefix must be unique. The prefix should be alphabetic have special characters and cannot start with a number. The left must not exceed 8 characters. It password for schemas created using the Oracle Data Integrating Creation Utility (RCU). The password must be between 8 and 12 alphanumeric character must include at least one number. The password cannot start include at least one number. The password cannot start include at least one number in the password cannot start include at least one number. The password cannot start include at least one number in the password cannot start include at least one number. The password cannot start include at least one number in the password cannot start include at least one number. The password cannot start include at least one number in the password cannot start include at least one number. The password cannot start include at least one number in the password cannot start include at least one number. The password cannot start include at least
Repositor Note: The long and a number exify the elespace Details Pecify Tablespace Creation of Oracle at Integrator exit in for infiguration nemas Pecify Tablespace Specify the creates the component exit in for installation nemas Pecify Tablespace Specify the oracle of the component exit in for installation nemas Pecify Tablespace Specify the oracle of the component exit in for installation nemas Pecify Tablespace Specify the oracle of the oracle of the component exit in for installation of the continuation of the	have special characters and cannot start with a number. The leafix must not exceed 8 characters. It password for schemas created using the Oracle Data Integratory Creation Utility (RCU). The password must be between 8 and 12 alphanumeric character must include at least one number. The password cannot start or the tablespace names for the configuration schemas. The installation has tablespaces if they do not exist. The password cannot start or the tablespace name default tablespace name pository schema default tablespace name ablespace names for the creation of temporary objects used by ata Integrator Loaders. The installer creates these tablespaces not exist.
Repositor Note: The long and a number exify the elespace Details Pecify Tablespace Creation of Oracle to they do not they do	ry Creation Utility (RCU). e password must be between 8 and 12 alphanumeric characte must include at least one number. The password cannot start or. the tablespace names for the configuration schemas. The installatese tablespaces if they do not exist. cository schema default tablespace name cository schema temporary tablespace name ablespace names for the creation of temporary objects used by ata Integrator Loaders. The installer creates these tablespaces not exist.
long and a number specify the specify the specify to creates to the specify to creates to the specify to creation of Oracle oracle is a Integrator inporary Objects Pecify Tablespace oracle is a Integrator inporary Objects Pecify Tablespace oracle is componed in the specify to creation for infiguration in the mas oracle is cation for installation oracle if the oracle if the reputation oracle if the reputation oracle if the reputation oracle is cation for installation oracle if the reputation oracle is cation for installation oracle if the reputation oracle is cation for installation oracle if the oracle is cation for installation oracle in the cation for installation oracle in the cation for installation oracle is cation for installation oracle in the cation for installation oracle is cation for installation oracle in the cation for installation oracle is cation for installation oracle in the cation for installation oracle is cation for installation oracle in the cation for installation oracle in the cation for installation oracle is cation for installation oracle in the cation for installation oracle is cation for installation oracle in the catio	must include at least one number. The password cannot start r. the tablespace names for the configuration schemas. The installatese tablespaces if they do not exist. pository schema default tablespace name ablespace names for the creation of temporary objects used by ata Integrator Loaders. The installer creates these tablespaces not exist.
ecify Tablespace In Integrator Inporary Objects Pecify Tablespace It a Integrator Infiguration In Integrator Integrato	hese tablespaces if they do not exist. Disitory schema default tablespace name Disitory schema temporary tablespace name Diablespace names for the creation of temporary objects used by Diata Integrator Loaders. The installer creates these tablespaces Diot exist. Dehouse Integration Loaders
Representation of Oracle Drace	ository schema temporary tablespace name ablespace names for the creation of temporary objects used by ata Integrator Loaders. The installer creates these tablespaces of exist. Schouse Integration Loaders
Creation of Oracle Ital Integrator Inporary Objects Creation of Oracle Ital Integrator Inporary Objects Coh Ital Integrator Inporary Objects Coh Ital Integrator Inporary Objects Coh Ital Integrator Integra	ablespace names for the creation of temporary objects used by ata Integrator Loaders. The installer creates these tablespaces not exist. The installer creates these tablespaces are the exist.
Creation of Oracle ta Integrator Inporary Objects Oracle D Integrator Inporary Objects Warn Hea Coh Term Oracle re compone ecify Tablespace tation for Infiguration Inemas Ecify Tablespace Specify tablespace	ata Integrator Loaders. The installer creates these tablespaces ot exist. chouse Integration Loaders
Proporary Objects Hea Coh Term Oracle re compone ecify Tablespace cation for Infiguration Inemas Pecify Tablespace Cation for Installation Install	ehouse Integration Loaders
Hea Coh Tern Oracle recompone ecify Tablespace cation for nemas Becify Tablespace cation for configuration nemas If the Oracle recompone specify to the locat privileges action for consistory Schemas The locat privileges If the rep the locat Click Nexity Configuration Click Nexity Configuration Tern Configuration Click Nexity Click Nexity Configuration Click Nexity C	-
• Term Oracle re compone ecify Tablespace ration for nemas Becify Tablespace recify	
Oracle recomponer secify Tablespace sation for privileges nemas If the Oracle recomponer secify Tablespace secify Tablespace sation for schema. The local privileges schema. Click Nesting Configuration Oracle recomponer Componer The local privileges If the reputhe locate Click Nesting Componer Componer The local privileges The local pr	ort Data mart Loaders
components ecify Tablespace sation for The loca privileges from the Ora installation for Schema. Example 1	ninology Loaders
cation for a privileges of the Oral installation secify Tablespace cation for soository Schemas of the Iocal privileges of the Iocal privileges of the Iocal ify Configuration The Iocal privileges of the Iocal III of the Iocal III of Iocal privileges of the Iocal III of Iocal	ecommends that you provide different tablespace names for ea ent.
nfiguration privileges nemas If the Ora installation ecify Tablespace sation for schema. Dository Schemas The local privileges If the rep the locat ify Configuration Click Ne	ne tablespace location for configuration schemas.
ecify Tablespace Specify to schema. The local privileges If the Oral installation Specify to schema. The local privileges If the rep the locat Click Ne:	tion should be present in the data model database server with s.
cation for schema. The local privilege: If the reputhe locate ify Configuration Schema. The local privilege: If the reputhe locate Click Ne	acle Healthcare Foundation data model database is not on the on server, you must enter the location manually.
privilege: If the rep the locat ify Configuration Click Ne :	he tablespace location for the Oracle Data Integrator repository
the locat ify Configuration Click Ne :	
	ository database is not on the installation server, you must ento on manually.
ameters	ct.
•	
	t after reviewing the installation information. At the confirmation lick Yes to exit the installer.
nn	neters Click Inst f Installation Click Exi



-	Steps
	Contact Oracle support, if necessary, to resolve any errors.

Create a New Oracle Data Integrator Repository Login

Perform the following steps to create a new Oracle Data Integrator repository login:

- Steps
Navigate to ODI > File > New > Create a New ODI Repository Login.
Click OK . The Repository Connection Information screen is displayed.
Enter the following values:
Login Name - For example, OHF_REPOSITORY_LOGINUser - SUPERVISOR
 Password - Provide the Oracle Data Integrator Login password entered during installation (see Run the Installer)
User - database schema created for the master repository
Password - database schema password created for the master repository
Driver List - Select OracleJDBC Driver from the drop-down list
Driver Name - oracle.jdbc.oracledriver
Url - Set appropriate values based on your database details
 Work Repository - Select the Work Repository option, browse to select the work repository shown (for example, for Warehouse Integration loader, select OHF_WORK_REPOSITORY), and click OK.
Click OK . The login name is created with the name specified in the previous step.
Navigate to ODI > Connect > ODI Studio .
Enter the following details:
Login Name - Select OHF_REPOSITORY_LOGIN
User - Supervisor
Password - Provide the Oracle Data Integrator login password that was entered during

Similarly, follow the above steps to create the login for the Terminology loaders, Common Data Mart loader, and Cohort Data Mart loader.

Installing the Data Management Assembly with Pre-Created User Schemas

Complete the following:

- Check Prerequisites
- Create Default and Temporary Tablespaces

installation (see Run the Installer).

- Create User Schemas
- Prepare the Installer
- Run the Installer



- Check the Installation
- Revoke Privileges

Check Prerequisites

- Steps
The user is familiar with Oracle Database (DB), Oracle Data Integrator, and Linux OS.
The Oracle Healthcare Foundation Data Model is installed.
Follow the instructions in Data Model Installation or Data Model Upgrade.
The Data Management Assembly installer is run on the system where the Oracle Data Integrator server is installed.
Make sure that the database compatible parameter is set to 19.3.0.0.0 by connecting to the DBA user and running the query below:
<pre>select * from v\$parameter where name = 'compatible';</pre>
If the parameter is not set to 19.3.0.0.0, ask your database administrator to set it.
Oracle Data Integrator services can connect to the Data Model 8.2.5 database mentioned in the Oracle TNS file (TNS entries of the required database must be available in the installation server tnsnames.ora file).
The password expiry notification message does not display for the pre-created schemas or system user.
The terminology loaders source file location exists. The installer creates an archive directory. For example,
$/ \verb scratch/home/oemora/TL_Source is the source file location specified during installation which already exists.$
$/ \verb scratch/home/oemora/TL_Archive_Files is created by the installer as the archive directory.$
The path of the data file (Configuration schema/Repository schema tablespace) mentioned when creating the tablespace is correct. Make sure that the database user has write privileges.
Enough space is available in the installation directory and the Oracle Home directory.
The Sqlplus utility is available on the installation server.
The impdp utility is available on the repository database server.
Check write permissions on oralnventory is granted to "others". If write permissions are not grante then add the user that the oracle software being installed to the group of the inventory owner (for instance - oinstall) as root:
usermod -a -G <ora inventory="" owner=""> <installation_user></installation_user></ora>
The installation user has read, write, and execute privileges to the <code>\$ODI_HOME/odi/agent/bin</code> folder. The installer creates product specific files under this location.



Steps

For remote installations, where the installation server and the Oracle Data Integrator Repository Database server are different machines, make sure that:

- A directory from the remote database server is mounted to the installation server with appropriate read and write privileges.
- The remote directory is accessible from the installation server upon mounting.
- The user that owns Oracle Database services on the remote server has privilege 755 for the directory that has been mounted on the installation server.
- If the database is on an Exadata machine, provide the database single node (the node which is mounted) as the host name when prompted during installation.
- ODI app machine should contain Oracle client. If it does not have the client, install Oracle Instant Client. Refer to the Troubleshooting section for Install and Configure Oracle Instant Client.
- GLOBAL_NAMES database initialization parameter is set to false.
- In the case of an Oracle Healthcare Foundation upgrade, back up the following csv files under <code>\$ODI HOME/odi/agent/bin</code> if it exists:
 - bus_susp_day.csv
 - daylght_svngs_day.csv
 - hosp hol day.csv
 - time odi.csv
- In the case of an Oracle Healthcare Foundation upgrade, if the Terminology Loaders source folder is shared, make a backup of the following files:
 - Code Axes.txt
 - Code Descriptions.txt
 - Code Hierarchy.txt
 - Code.txt
 - Related Entity.txt
 - Relations Type.txt
 - Relations.txt
 - Relationship Type.txt
 - time.txt

The installer will overwrite any existing files from the list above.

Note:

The installer auto-populates some of the user parameters and lets you edit them.

Create Default and Temporary Tablespaces

Create the following default and temporary tablespaces with appropriate quotas. You can use different tablespace names than the ones listed below.



The hmc_ts and hmc_temp tablespaces must be created in the Data Model database instance.



- Tablespace Name	Big File Tablespace	Description
odirep_ts	Yes	Default tablespace for the Repository schema.
odirep_temp	Yes	Temporary tablespace for the Repository schema.
hmc_ts	Yes	Default tablespace for the Configuration schema.
hmc_temp	Yes	Temporary tablespace for the Configuration schema.
wil_odi_ts	Yes	Default tablespace for Oracle Data Integrator temporary objects for Warehouse Integration loaders.
hcd_odi_ts	Yes	Default tablespace for Oracle Data Integrator temporary objects for Healthcare Common Data mart loaders.
cdm_odi_ts	Yes	Default tablespace for Oracle Data Integrator temporary objects for Cohort Data mart loaders.
tl_odi_ts	Yes	Default tablespace for Oracle Data Integrator temporary objects for terminology loaders.

Create User Schemas

Create the following user schemas and assign the appropriate default and temporary tablespaces. Refer to Create Default and Temporary Tablespaces for details. If you created tablespaces with different names, use those instead.

- Schema Name	Schema Description	Default Tablespace	Temporary Tablespace
wil_hmc	Warehouse Integration Loader Configuration schema	hmc_ts	hmc_temp
hcd_hmc	Healthcare Common Data Mart Configuration schema	hmc_ts	hmc_temp
ohf_master_rep_80	Warehouse Integration Loader Master Repository schema	odirep_ts	odirep_temp
ohf_work_rep_80	Warehouse Integration Loader Work Repository schema	odirep_ts	odirep_temp

Prepare the Installer

-	Steps
	Extract the contents of the Oracle Healthcare Foundation media pack to your system.
	Navigate to <i>media_pack_locationI</i> folder.
	Unzip the p37792720_82500_Generic.zip file where you want to launch the installer using the following command:
	unzip -a p37792720_82500_Generic.zip
	Navigate to the media_pack_location/Disk2/stage/Components/oracle.hsgbu.hc.dma.odi/8.2.5.0.0/1/DataFiles/Expanded/filegroup1 directory.



- Steps		
Unzip the dma_odi_master_install.zip file.		
Navigate to the dma_odi_master_install/hmc_odi_install/ directory.		
Connect to the system user and execute the following scripts:		
• @odi_hdi_user_privilege.sql HDI_SCHEMA_NAME		
• @odi_hmc_user_privilege.sql WIL_HMC_SCHEMA_NAME HCD_HMC_SCHEMA_NAME		
 @odi_rep_user_privilege.sql HLI_MASTER_REP_USR WIL_MASTER_REP_USR AT_MASTER_REP_USR HLI_WORK_REP_USR WIL_WORK_REP_USR AT_WORK_REP_USR CDM_MASTER_REP_USR CDM_WORK_REP_USR 		
Navigate to the <i>media_pack_location</i> /Disk1/install folder.		
Change the protection on the files as follows: chmod 755 *		

Run the Installer

Start the Oracle Universal Installer by running the following command:

- If the Oracle Data Integrator repository schemas (master and work) to be created are on the database instance of the installation server, execute:
 sh runInstaller.sh -local dba tasks=false
- If the Oracle Data Integrator repository database or Oracle Healthcare Foundation data model database is on the database instance of another server, execute:

 sh runInstaller.sh -local remote_installation=true dba_tasks=false

where, the -local option is to install on the local node irrespective of the cluster nodes specified on the installer machine.

- Screen	Action
Welcome	Click Next.
Select a Product to Install	Select the Oracle Healthcare Foundation Data Management Assembly for ODI 8.2.5.0.0 option.
Specify Home Details	Enter the installation home path.
Verify Installation Prerequisites	Verify if all of the prerequisites are met before proceeding.
Select the Oracle Home Configuration	Specify the Oracle client home path.
Select the Oracle Data Integrator Home Location	Specify the Oracle Data Integrator home location. The Oracle Data Integrator home should be one level above the / oracle_common directory. For example, /u01/app/oracle/Oracle_ODI1.
Select Database Server for Oracle Data Integrator Repository Schemas	 Select one of the following options for the Oracle Data Integrator repository schemas: If the Oracle Data Integrator repository database server is on the installation server, select the Installation database server option. Else, select the Remote database server option.



Screen	Action
Specify Mount Path Details (applicable only for remote installations)	 Enter the configuration details for the mounted remote server directory: Mounted directory path on the remote server. Mount path on the installation server. To obtain the available storage drives, on the Linux machine, execute the df -h command. If the remote server directory is mounted on the installation server, the mounting is displayed as follows:
	Remote Server name: Remote server path total size Available space use% Path in installation server where mounting was done
	For example:
	abc:/scrath/dump 191g 138g 44g 76% / installation server
	 Note: The directory of the remote database server should be mounted to the installation server with appropriate read and write privileges for the IMPDB utility (folder with dba group). If the remote server mounted path is displayed as I, provide the absolute mounted path of the remote server.
Specify Healthcare Data Model Database Instance Details	 Enter values for the following fields: Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port number Service name Select this database instance for repository schema creation If you select Yes, the installer uses the same Data Model database instance for Oracle Data Integrator repository schema creation.
Specify Oracle Data Integrator Repository Database Instance Details (applicable only if you selected No in the previous screen for Select this database instance for repository schema creation)	 Enter values for the following fields: Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port Service name
Specify Oracle Data Integrator Supervisor Password	Specify the supervisor password used for the Oracle Data Integrator console login.
Select Terminology Loaders Source Location	Specify the Terminology loaders source file location. This location is used to read the terminology loaders source data files. You can change this location when required. The installer creates an archive directory at the same level as the source directory. Make sure that the create directory privileges exist for the installation user.



- Screen	Action
Specify Healthcare Data Model Schema Details	 Enter values for the pre-created schemas: Interface table schema name Interface table schema password Data warehouse schema name Data warehouse schema password Common data mart (hcd) schema name Common data mart (hcd) schema password Cohort data mart (cdm) schema name Cohort data mart (cdm) schema password
Specify Healthcare Data Model Schema Details	 Enter values for the pre-created schemas: Enterprise schema name Enterprise schema password.
Specify Warehouse Integration Loader Details	Enter values for the pre-created schemas: Configuration schema name Configuration schema password Specify WIL configuration schema user and password details.
Specify OHF Repository Schema Details	 Enter values for the OHF Repository pre-created schemas: OHF ODI repository schema name OHF ODI repository schema password The installer imports OHF repository into the pre-created OHF repository schemas.
Specify Healthcare Common Data Mart Loader Details	 Enter values for the pre-created schemas: Configuration schema name Configuration schema password Specify the existing/pre-created HCD configuration schema name.
Specify RCU Prefix and Password	Specify an RCU prefix to be prepended to the schemas created by the Oracle Data Integrator Repository Creation Utility (RCU). The RCU creates 3 schemas: • RCU Prefix_STB • RCU Prefix_WLS • RCU Prefix_WLS_RUNTIME Note: The RCU Prefix must be unique. The prefix should be alphabetic only. It cannot have special characters and cannot start with a number. The length of the prefix must not exceed 8 characters. Specify a password for schemas created using the Oracle Data Integrator Repository Creation Utility (RCU). Note: The password must be between 8 and 12 alphanumeric characters long and must include at least one number. The password cannot start with a number.
Specify Tablespace for Creation of Oracle Data Integrator Temporary Objects	Specify tablespace names for the creation of temporary objects used by the Oracle Data Integrator loaders. The installer creates the following tablespaces if they do not exist: Warehouse Integration Loaders Healthcare Common Datamart Loaders Cohort Datamart Loaders Terminology Loaders Oracle recommends that you provide different tablespace names for each component.
Verify Configuration Parameters	Click Next.



- Screen	Action
Summary	Click Install.
End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.

Check the Installation

•	Steps
	Review the generated installation log files for errors. For details, see Installation Log Files.
	Contact Oracle support, if necessary, to resolve any errors.

Revoke Privileges

After the Data Management Assembly for Oracle Data Integrator installation, run the following scripts from a user with DBA privileges:

```
@OHF_Install_Home/dma_odi_master_install/hmc_odi_install/dma_directory_drop.sql
@@OHF_Install_Home/dma_odi_master_install/hmc_odi_install/
dma_revoke_privilege.sql_WIL_MASTER_REP_USR_HCD_MASTER_REP_USR_CDM_MASTER_REP_USR
HLI MASTER_REP_USR
```

where,

OHF_Install_Home - Oracle Healthcare Foundation installation home directory

WIL_MASTER_REP_USR - Warehouse integration loader master repository schema name

HCD_MASTER_REP_USR - Healthcare common data mart loader master repository schema name

CDM_MASTER_REP_USR - Cohort data mart loader master repository schema name

HLI_MASTER_REP_USR - Terminology loader master repository schema name



4

Data Management Assembly for Informatica Installation

This chapter describes how to install the Oracle Healthcare Foundation Data Management Assembly for Informatica. There are two ways to install the Data Management Assembly for Informatica, depending on how you create the user schemas. The installer can create the user schemas during the installation or you can create them manually, prior to the installation. After the installation is complete, you must assign the integration service to the workflows:

- Installing the Data Management Assembly without Pre-Created User Schemas
- Installing the Data Management Assembly with Pre-Created User Schemas
- · Assigning the Integration Service

Installing the Data Management Assembly without Pre-Created User Schemas

Complete the following:

- Check Prerequisites
- · Prepare the Installer
- · Run the Installer
- Check the Installation

Check Prerequisites

-	Steps
	The user is familiar with Oracle Database (DB), Informatica, and Linux OS.
Г	The Oracle Healthcare Foundation Data Model is installed.
_	Follow the instructions in Data Model Installation or Data Model Upgrade.
	Make sure that the database compatible parameter is set to 19.3.0.0.0 by connecting to the DBA user and running the query below:
	<pre>select * from v\$parameter where name = 'compatible';</pre>
	If the parameter is not set to 19.3.0.0.0, ask your database administrator to set it.
	Upgrade to OHF 8.2.5 before upgrading to INFORMATICA 10.5.3.
	The Informatica domain is running and no user is connected to the Informatica Admin Console.
	Informatica services can connect to the Data Model 8.2.5 database mentioned in the Oracle TNS file (TNS entries of the required database must be available in the installation server tnsnames.ora file).



-	Steps
	You can connect the database using EZCONNECT syntax. For example, sqlplus user/password@hostname:port/service name.
	The password expiry notification message does not display for the system user.
	The installer is run on the system where the Informatica server is installed.
	The terminology loaders source file location exists. The installer creates an archive directory. For example,
	$/ \verb scratch/home/oemora/TL_Source is the source file location specified during installation, which already exists.$
	$/ \verb scratch/home/oemora/TL_Archive_Files \ \ \textbf{is created by the installer as the archive directory.}$
	The path of the data file (Configuration schema/Repository schema tablespace) mentioned when creating the tablespace is correct. Make sure that the database user has write privileges.
	Enough space is available in the installation directory and the Oracle Home directory.
	The Sqlplus utility is available on the installation server.
	The impdp utility is available on the repository database server.
	Check write permissions on oralnventory is granted to "others". If write permissions are not granted then add the user that the oracle software being installed to the group of the inventory owner (for instance- oinstall) as root:
	<pre>usermod -a -G <ora inventory="" owner=""> <installation_user></installation_user></ora></pre>
	The installation user has read, write, and execute privileges to the \$INFA_HOME/server folder. The installer creates product specific folders and parameter files under this location.
	For remote installations, where the installation server and the Informatica Repository Database are on different machines, make sure that:
	• The remote database server directory is mounted to the installation server with appropriate read and write privileges.
	The remote directories are accessible after mounting from the installation server.
	• The Linux user of the remote server, who executes the Oracle process, has privilege 755 for the directory (datapump).
	The Oracle user has privileges for the mount path directory.
	• If the repository DB is on an Exadata machine, the repository DB single node (the node which is mounted) TNSENTRY should be added to the tnsnames.ora file on the installation server.
	 After installation, revert TNSENTRY to the original entry. Informatica app machine should contain Oracle client. If it does not have the client, install Oracle Instant Client. Refer to the Troubleshooting section for Install and Configure Oracle Instant Client.
Г	GLOBAL_NAMES database initialization parameter is set to false.
	Back up the following csv files under \$INFORMATICA_HOME/server/infa_shared/ SrcFiles if it exists:
	• bus susp day.csv
	• daylght_svngs_day.csv
	• hosp_hol_day.csv
	• time_am.csv
	• time pm.csv



If the Terminology Loaders source folder is shared, make a backup of the following files:

- Code Axes.txt
- Code Descriptions.txt
- Code Hierarchy.txt
- Code.txt
- Related Entity.txt
- Relations Type.txt
- Relations.txt
- Relationship Type.txt
- time.txt

The installer will overwrite any existing files from the list above.

Prepare the Installer

Steps	
Extract the contents of the Oracle Healthcare Foundation media pack to your system.	
Navigate to <i>media_pack_location</i> /folder.	
Unzip the p37792720_82500_Generic.zip file where you want to launch the installer using the following command: unzip -a p37792720 82500 Generic.zip	
Navigate to the Disk1/install folder.	
Change the protection on files as follows: chmod 755 *	

Run the Installer

Start the Oracle Universal Installer by running the following command:

• If the Informatica repository schemas to be created are on the database instance of the installation server, execute:

sh runInstaller.sh -local

If the Informatica repository database or Oracle Healthcare Foundation data model database is on the database instance of another server, execute:

sh runInstaller.sh -local remote_installation=true

where, the -local option is to install on the local node irrespective of the cluster nodes specified on the installer machine.

- Scree	n	Action
Welco	me	Click Next.
Select Install	a Product to	Select the Oracle Healthcare Foundation Data Management Assembly for Informatica 8.2.5.0.0 option.
Specif	y Home Details	Enter or select the installation home path.



- Scr	reen	Action
	rify Installation erequisites	Verify if all of the prerequisites are met before proceeding.
	acle Home nfiguration	Specify the Oracle client home path.
	Select the Informatica Home Location	Specify the Informatica home location.
Ш Hor		The Informatica home should be one level above the /server directory. For example, $path/Informatica/961/$.
☐ Info	ormatica Shared th	The Informatica Shared Path should be one level above the SrcFiles folder. For example, path/Informatica/961/server/infa_shared.



Before starting installation ensure that all required subfolders are created under infa_shared folder.

For example: SrcFiles, TgtFiles, SessLogs, WorkflowLogs, and so forth.

Select Database
Server for Informatica
Repository Schemas

Specify Mount Path Details (applicable only for remote installations) Select one of the following options for the Informatica repository schemas:

- If the Informatica repository database server is on the installation server, select the **Installation database server** option.
- For remote installations, select the Remote database server option.

Enter the following mounted directory configuration details in which the remote server directory is mounted:

- Mount path in the repository database server Remote server path
- Mount path in the installation server Path on the installation server where the mounting is performed

To obtain the available storage drives, on the Linux machine, execute the \mathtt{df} -h command. If the remote server directory is mounted on the installation server, the mounting is displayed as follows:

Remote Server name:Remote server path
total size used up space Available space use% Path
in installation server where mounting was done

For example,

abc:/scratch/dump 191G 138G 44G 76% /installation server

Note:

- The (datapump) directory of the remote database server should be mounted to the installation server with appropriate read and write privileges for the IMPDB utility (folder with dba group).
- Make sure that the remote directories are accessible after mounting from the installation server.
- If the remote server mounted path is displayed as I, provide the absolute mounted path of the remote server.
- The remote server Linux user that executes the Oracle process must have the minimum privilege of 755 to the directory.



-	Screen	Action	
	Specify Healthcare Data Model Database Instance Details Specify Informatica Repository Database Instance Details (applicable only if you selected No in the previous screen for Select this database	 Enter values for the following fields: Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port number Service name System user password Select this database instance for repository schema creation If you select Yes, the installer uses the same Data Model database instance for Informatica repository schema creation. Enter values for the following fields: Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port Service name System user password 	
	instance for repository schema creation) Select Terminology	Specify the Terminology loaders source file location.	
	Loaders Source Location	This location is used to read the terminology loaders source data files. You can change this location when required.	
		The installer creates an archive directory at the same level as the source directory. Make sure that the create directory privileges exist for the installation user.	
	Specify Healthcare Data Model Schema Details	 Enter values for the following fields: Interface table schema name Interface table schema password Data warehouse schema name Data warehouse schema password Common data mart (hcd) schema name Common data mart (hcd) schema password Cohort data mart (cdm) schema name Cohort data mart (cdm) schema password 	
	Specify Healthcare Data Model Schema Details	 Enter values for the following fields: Enterprise schema name Enterprise schema password. 	
	Specify Warehouse Integration Loader Details	Enter values for the following fields: Configuration schema name Configuration schema password Repository name Repository schema name Repository schema password The installer creates a configuration schema if it does not exist. Provide the new Repository schema name.	



-	Screen	Action
	Specify Healthcare Common Data Mart Loader Details	 Enter values for the following fields: Configuration schema name Configuration schema password Repository name Repository schema name Repository schema password The installer creates a configuration schema if it does not exist. Provide the new Repository schema name. If you provide an existing repository name, the installer removes the repository and the corresponding integration service (Is_Repository name). It creates a repository service (Repository name) and integration service (Is_Repository name).
		The installer creates a repository schema if it does not exist in the database. If you enter an existing repository schema, the installer overwrites the content with the new one, and you will lose all existing objects.
	Specify Healthcare Cohort Data Mart Loader Details	 Enter values for the following fields: Repository name Repository schema name Repository schema password The configuration schema is not required for CDM. Provide the new Repository schema name.
	Specify Tablespace Details (if prompted)	Specify the tablespace names for the configuration schemas. The installer creates these tablespaces if they do not exist. Configuration schema default tablespace name Configuration schema temporary tablespace name
	Specify Tablespace Details (if prompted)	Specify the tablespace names for repository schemas. The installer creates these tablespaces if they do not exist in the database. Repository schema default tablespace name Repository schema temporary tablespace name
	Specify Tablespace Location for Configuration Schema (if prompted)	Specify the tablespace location for the Configuration schema. The location should be present in the Oracle Healthcare Foundation data model database server with write privileges. If the Oracle Healthcare Foundation data model database is not on the installation server, you must enter the location manually.
	Specify Tablespace Location for Repository Schema (if prompted)	Specify the tablespace location for the repository schemas. When the repository database is not on the installation server, you must enter the location manually. The location should be present on the repository database server with write privileges.



	- Screen	Action			
	Specify Informatica Domain Details	Specify the following parameters: Domain name Domain code page ID Node name License name Informatica host name Informatica port number Informatica administrator user name Informatica administrator password Contact your Informatica Administrator for the Domain Code Page ID and provide a valid Code Page ID. Make sure that the code page is compatible with the domain code page for creating the Integration Service. For a domain compatible code page, see any existing and active integration service code pages from the Informatica admin console. A list of sample code pages and their IDs are as follows: US-ASCII (ID 1) - 7-bit ASCII Latin1 (ID 4) - ISO 8859-1 Western European JapanEUC (ID 18) - Japanese Extended Unix Code (including JIS X 0212) UTF-8 (ID 106) - Unicode Transformation Format, multibyte MS932 (ID 2024) - MS Windows Japanese, Shift-JIS			
	Verify Configuration Parameters	 MS1252 (ID 2252) - MS Windows Latin1 (ANSI), superset of Latin1 Click Next. 			
	Summary	Click Install.			
	End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.			
Check the I	nstallation				
	- Steps				
	Review the generated	installation log files for errors. For details, see Installation Log Files.			
	Contact Oracle support, if necessary, to resolve any errors.				

Installing the Data Management Assembly with Pre-Created User Schemas

Complete the following:

- Check Prerequisites
- Create Default and Temporary Tablespaces
- Create User Schemas
- Prepare the Installer
- Run the Installer



- Check the Installation
- Revoke Privileges

Check Prerequisites

- Steps
The user is familiar with Oracle Database (DB), Informatica, and Linux OS.
The Oracle Healthcare Foundation Data Model is installed. Follow the instructions in Data Model Installation or Data Model Upgrade.
Make sure that the database compatible parameter is set to 19.3.0.0.0 by connecting to the DBA user and running the query below:
<pre>select * from v\$parameter where name = 'compatible';</pre>
If the parameter is not set to 19.3.0.0.0, ask your database administrator to set it.
The Informatica domain is running and no user is connected to the Informatica Admin Console.
Informatica services can connect to the Data Model 8.2.5 database mentioned in the Oracle TNS file (TNS entries of the required database must be available in the installation server tnsnames.ora file).
You can connect the database using EZCONNECT syntax. For example, sqlplus <i>user/</i> password@hostname:port/service name.
The password expiry notification message does not display for the system user or pre-created schemas.
The installer is run on the system where the Informatica server is installed.
The terminology loaders source file location exists. The installer creates an archive directory. For example,
/scratch/home/oemora/TL_Source is the source file location specified during installation, which already exists.
$/ \verb scratch/home/oemora/TL_Archive_Files \textbf{is created by the installer as the archive directory.} \\$
The path of the data file (Configuration schema/Repository schema tablespace) mentioned when creating the tablespace is correct. Make sure that the database user has write privileges.
Enough space is available in the installation directory and the Oracle Home directory.
The Sqlplus utility is available on the installation server.
The impdp utility is available on the repository database server.
Check write permissions on oralnventory is granted to "others". If write permissions are not granted then add the user that the oracle software being installed to the group of the inventory owner (for instance- oinstall) as root:
usermod -a -G <ora inventory="" owner=""> <installation_user></installation_user></ora>
The installation user has read, write, and execute privileges to the \$INFA_HOME/server folder. The installer creates product-specific folders and parameter files under this location.



Steps

For remote installations, where the installation server and the Informatica Repository Database are on different machines, make sure that:

- The remote database server directory is mounted to the installation server with appropriate read and write privileges.
- The remote directories are accessible after mounting from the installation server.
- The Linux user of the remote server, who executes the Oracle process, has privilege 755 for the directory (datapump).
- The Oracle user has privilege for the mount path directory.
- If the repository DB is on an Exadata machine, the repository DB single node (the node which is mounted) TNSENTRY should be added to the tnsnames.ora file on the installation server. After installation, revert TNSENTRY to the original entry.
- Informatica app machine should contain Oracle client. If it does not have the client, install Oracle Instant Client. Refer to the Troubleshooting section for Install and Configure Oracle Instant Client.
- GLOBAL NAMES database initialization parameter is set to false.
- Back up the following csv files under \$INFORMATICA_HOME/server/infa_shared/ SrcFiles if it exists:
 - bus susp day.csv
 - daylght svngs day.csv
 - hosp hol day.csv
 - time am.csv
 - time pm.csv
- If the Terminology Loaders source folder is shared, make a backup of the following files:
 - Code Axes.txt
 - Code Descriptions.txt
 - Code Hierarchy.txt
 - Code.txt
 - Related Entity.txt
 - Relations Type.txt
 - Relations.txt
 - Relationship Type.txt
 - time.txt

The installer will overwrite any existing files from the list above.

Create Default and Temporary Tablespaces

Create the following default and temporary tablespaces with appropriate quotas. You can use different tablespace names than the ones listed below.



The hmc_ts and hmc_temp tablespaces must be created in the Data Model database instance.



- Tablespace Name	Big File Tablespace	Description
infarep_ts	Yes	Default tablespace for the Repository schema
infarep_temp	Yes	Temporary tablespace for the Repository schema
hmc_ts	Yes	Default tablespace for the Configuration schema
hmc_temp	Yes	Temporary tablespace for the Configuration schema

Create User Schemas

Create the following user schemas and assign the appropriate default and temporary tablespaces. Refer to Create Default and Temporary Tablespaces for details. If you created tablespaces with different names, use those instead.

- Schema Name	Schema Description	Default Tablespace	Temporary Tablespace
wil_hmc	Warehouse Integration Loader Configuration schema	hmc_ts	hmc_temp
hcd_hmc	Healthcare Common Data Mart Configuration schema	hmc_ts	hmc_temp
wil_rep_82	Warehouse Integration Loader Repository schema	infarep_ts	infarep_temp
hcd_rep_82	Healthcare Common Data Mart Repository schema	infarep_ts	infarep_temp
cdm_rep_82	Healthcare Cohort Data Mart Repository schema	infarep_ts	infarep_temp

Prepare the Installer

-	Steps
	Extract the contents of the Oracle Healthcare Foundation media pack to your system.
	Navigate to the <i>media_pack_locationl</i> folder.
	Unzip the p37792720_82500_Generic.zip file where you want to launch the installer using the following command:
	unzip -a p37792720_82500_Generic.zip
	Navigate to the <media_pack_location>/Disk3/stage/Components/oracle.hsgbu.hc.dma.infa/8.2.5.0.0/1/DataFiles/Expanded/filegroup1 directory.</media_pack_location>
	Unzip the dma_infa_master_install.zip file.
	Navigate to the dma_infa_master_install/hmc_infa_install/ directory.



- Steps						
Connect to the system user and execute the following scripts:						
• @infa_hdi_user_privilege.sql HDI_SCHEMA_NAME						
• @infa_hmc_user_privilege.sql WIL_HMC_SCHEMA_NAME HCD_HMC_SCHEMA_NAME						
 @infa_rep_user_privilege.sql WIL_INFA_REP_DB_USER HCD_INFA_REP_DB_US. CDM_INFA_REP_DB_USER 	ΞR					
Navigate to the <i>media_pack_location</i> /Disk1/install folder.						
Change the protection on files as follows: chmod 755 *						

Run the Installer

Start the Oracle Universal Installer by running the following command:

- If the Informatica repository database or the Oracle Healthcare Foundation data model database is on the database instance of the installation server, execute: sh runInstaller.sh -local dba tasks=false
- If the Informatica repository schemas to be created are on the database instance of another server, execute:

sh runInstaller.sh -local remote_installation=true dba_tasks=false

where, the -local option is to install on the local node irrespective of the cluster nodes specified on the installer machine.

- Screen	Action
Welcome	Click Next.
Select a Product to Install	Select the Oracle Healthcare Foundation Data Management Assembly for Informatica 8.2.5.0.0 option.
Select the Informatica Home Location	Enter or select the installation home path.
Verify Installation Prerequisites	Verify if all the prerequisites are met before proceeding.
Oracle Home Configuration	Specify the Oracle client home path.
Specify the Informatica Home Location.	Specify the Informatica home location. The Informatica home should be one level above the /server directory. For example, path/Informatica/961/.



- Screen	Action
Specify the Informatica Shared Path	The Informatica Shared Path should be one level above the SrcFiles folder. For example, path/Informatica/961/server/infa_shared.
	Note: Before starting installation ensure that all required subfolders are created under infa_shared folder. For example: SrcFiles, TgtFiles, SessLogs, WorkflowLogs, and so forth.
Select Database Server for Informatica Repository Schemas Specify Mount Path Details (applicable only for remote installations)	 Select one of the following options for the Informatica repository schemas: If the Informatica repository database server is on the installation server, select the Installation database server option. For remote installations, select the Remote database server option. Enter the following mounted directory configuration details in which the remote server directory is mounted: Mount path in the repository database server - Remote server path Mount path in the installation server - Path on the installation server where the mounting is performed To obtain the available storage drives, on the Linux machine, execute the df -h command. If the remote server directory is mounted on the installation server, the mounting is displayed as follows: Remote Server name: Remote server path total size used up space Available space uses Path in installation server where mounting was done
	For example, abc:/scratch/dump 191G 138G 44G 76% /installation server
	 Note: The (datapump) directory of the remote database server should be mounted to the installation server with appropriate read and write privileges for the IMPDB utility (folder with dba group). Make sure that the remote directories are accessible after mounting from the installation server. If the remote server mounted path is displayed as <i>I</i>, provide the absolute mounted path of the remote server. The remote server Linux user that executes the Oracle process must have minimum privileges of 755 to the directory.
Specify Healthcare Data Model Database Instance Details	 Enter values for the following fields: Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port number Service name Select this database instance for repository schema creation If you select Yes, the installer uses the same Data Model database instance for Informatica repository schema creation.



- Screen	Action
Specify Informatica Repository Database Instance Details (applicable only if you selected No in the previous screen for Select this database instance for repository schema creation)	 Enter values for the following fields: Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port number Service name
Select Terminology Loaders Source Location	Specify the Terminology loaders source file location. This location is used to read the terminology loaders source data files. You can change this location when required. The installer creates an archive directory at the same level as the source directory. Make sure that the create directory privileges exist for the installation user.
Specify Healthcare Data Model Schema Details	 Enter values for the following fields: Interface table schema name Interface table schema password Data warehouse schema name Data warehouse schema password Common data mart (hcd) schema name Common data mart (hcd) schema password Cohort data mart (cdm) schema name Cohort data mart (cdm) schema password
Specify Healthcare Data Model Schema Details	 Enter values for the following fields: Enterprise schema name Enterprise schema password
Specify Warehouse Integration Loader Details	 Enter values for the following fields: Configuration schema name Configuration schema password Repository name Repository schema name Repository schema password Provide the pre-created hmc schema details. If you enter an existing repository name, the installer removes the repository and the corresponding integration service (Is_Repository name). It creates a repository service (Repository name) and integration service (Is_Repository name). If you enter an existing repository schema name, the installer overwrites the content with the new one, and you will lose the existing objects



- Screen	Action
Specify Healthcare Common Data Mart Loader Details	 Enter values for the following fields: Configuration schema name Configuration schema password Repository name Repository schema name Repository schema password Provide the pre-created hmc schema details. If you enter an existing repository name, the installer removes the repository and the corresponding integration service (Is_Repository name). The installer creates a repository service (Repository name) and integration service (Is_Repository name). If you create an existing repository schema name, the installer overwrites the content with the new one, and you will lose the existing objects.
Specify Healthcare Cohort Data Mart Loader Details	Enter values for the following fields: Repository name Repository schema name Repository schema password The configuration schema is not required for CDM. If you enter an existing repository name, the installer removes the repository and the corresponding integration service (Is_Repository name). The installer creates a repository service (Repository name) and integration service (Is_Repository name). If you enter an existing repository schema, the installer overwrites the content with the new one, and you will lose the existing objects.
Specify Informatica Domain Details	 Specify the following parameters: Domain name Domain code page ID Node name License name Informatica host name Informatica port number Informatica administrator user name Informatica administrator password Contact your Informatica Administrator for the Domain Code Page ID and provide a valid Code Page ID. Make sure that the code page is compatible with the domain code page for creating the Integration Service. For a domain compatible code page, see any existing and active integration service code pages from the Informatica admin console. A list of sample code pages and their IDs are as follows: US-ASCII (ID 1) - 7-bit ASCII Latin1 (ID 4) - ISO 8859-1 Western European JapanEUC (ID 18) - Japanese Extended Unix Code (including JIS X 0212) UTF-8 (ID 106) - Unicode Transformation Format, multibyte MS932 (ID 2024) - MS Windows Japanese, Shift-JIS MS1252 (ID 2252) - MS Windows Latin1 (ANSI), superset of Latin1
Verify Configuration Parameters	Click Next.
Summary	Click Install.
End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.



Check the Installation

-	Steps
	Review the generated installation log files for errors. For details, see Installation Log Files.
	Contact Oracle support, if necessary, to resolve any errors.

Revoke Privileges

After the Data Management Assembly for Informatica installation, run the following scripts from System user:

```
@OHF_Install_Home/dma_infa_master_install/hmc_infa_install/dma_directory_drop.sql
@OHF_Install_Home/dma_infa_master_install/hmc_infa_install/
dma_revoke_privilege.sql_WIL_INFA_REP_DB_USER_HCD_INFA_REP_DB_USER
CDM_INFA_REP_DB_USER
```

where,

OHF_Install_Home - Oracle Healthcare Foundation installation home directory

WIL_INFA_REP_DB_USER - Warehouse integration loader repository schema name

HCD_INFA_REP_DB_USER - Healthcare common data mart loader repository schema name

CDM_INFA_REP_DB_USER - Cohort data mart loader repository schema name

Assigning the Integration Service

You must assign the integration service manually after the installation is complete. You can assign the integration service for all the workflows from the Workflow Manager:

- Steps	
Open the Workflow Manager.	
Connect to the repository.	
Click on any folder in the repository.	
Under Menu, click on Service and select Assign Integration Service.	
In the dialog box that opens, choose Integration Service from the drop-down I	ist.
Select all the folders and check Select all displayed workflows .	
Click Assign .	



Middle-Tier Installation

The Oracle Healthcare Foundation (OHF) Middle-Tier installs the following Web application:

Administration Console

The Oracle Healthcare Foundation Middle-Tier installs the following REST services:

- Data Pipeline Service
- File Upload Service

First, you must install the Middle-Tier on a primary node. This creates a WebLogic domain named **oh_domain** with a cluster named **oh_cluster**.

After you install the Middle-Tier on the primary node, you can optionally extend **oh_cluster** on secondary nodes, by running the installer on their corresponding machines.

This chapter contains the following sections:

- · Installing the Middle-Tier on the Primary Node
- Installing the Middle-Tier on a Secondary Node

Installing the Middle-Tier on the Primary Node

Complete the following:

- Check Prerequisites
- · Prepare the Installer
- · Run the Installer
- Check the Installation

Check Prerequisites

-	Steps
	Oracle Fusion Middleware Infrastructure 14.1.2.0 is installed on the machine (see Software Requirements).
	There is no Oracle WebLogic Server domain named "oh_domain" on the machine.
	All of the Oracle Healthcare Foundation Data Model schemas exist.
	The Oracle external table DIRECTORY object is created for Omics Data Bank.
	If you have already installed Oracle Healthcare Foundation 7.0.1 or 7.1 Middle-Tier components on Oracle WebLogic Server 12.1.3, uninstall the existing oh_domain and applications and install Oracle WebLogic Server 14.1.2.0.0.



Prepare the Installer

- Steps
Extract the contents of the Oracle Healthcare Foundation media pack to your system.
Open the <i>media_pack_locationl</i> folder.
Unzip the p37792720_825_Generic.zip file where you want to launch the installer using the following command: unzip -a p37792720 825 Generic.zip
Open the Disk1/install folder.
Change the protection on the files as follows: chmod 755 *

Run the Installer

Start the Oracle Universal Installer (OUI) by running the following command.

./runInstaller

- Screen	Action
Welcome	Click Next.
Select a Product to Install	Select the Oracle Healthcare Foundation Middle-Tier 8.2.5.0.0 option
Specify Home Details	Enter the Middle-Tier install home name and location.
Choose Install Type	Select Yes to perform a fresh installation.
Verify Install Prerequisites	Verify if all of the prerequisites are met.
Java Home	Specify the JDK installation path. The installer validates this path.
Fusion Middleware Home	Specify the Oracle WebLogic Server with ADF installation path. The installer validates this path.
Cluster Configuration	Select Yes to create a domain and make the machine a primary node where the Oracle WebLogic Server AdminServer is located.
AdminServer Configuration NodeManager Configuration	 Enter values for the following fields: Listen address Listen port SSL listen port User name - Oracle WebLogic Server administrator user Password - Oracle WebLogic Server administrator password Enter values for the following fields: Listen address Listen port User name - Node manager administrator user Password - Node manager administrator password Verify password



- Screen	Action
Managed Server	Enter values for the following fields:
Configuration	Number of Managed Servers on this machine
	 Managed Servers listen port start index - This is used as a starting point for incrementing the port numbers. For example, if the number of managed servers is 3, and the listen port start index is 8081, three managed servers with listen ports 8081, 8082, and 8083 are created.
FMW Repository Creation Utility (RCU) Configuration	The Fusion Middleware (FMW) RCU requires an Oracle Database user with DBA or SYSDBA privileges. Using the installer, you can create new RCU repositories, or use pre-created repositories using the WebLogic RCU utility.
	If you want to create RCU schemas outside installer refer to: https://docs.oracle.com/middleware/1213/core/RCUUG/rcu.htm#RCUUG325 for more details.
	Database host
	Database port
	Service name
	Schema prefix
	 DBA user name - This field is optional if the RCU repositories are pre- created using the RCU utility
	 DBA password - This field is optional if the RCU repositories are pre- created using the RCU utility
	Schemas common password
Oracle Healthcare	Enter values for the following fields:
Foundation Data Model Configuration - part 1	 Database host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine.
	Database port
	Service name
Oracle Healthcare	Enter values for the following fields:
Foundation Data	Omics Data Bank schema name
Model Configuration -	Omics Data Bank schema password
part 2	Services schema name
	Services schema password
	HDM schema name
	HDM schema password
	Enterprise schema name
	Enterprise schema password
Oracle Healthcare	Enter values for the following fields:
Foundation Data	Cohort Data Mart (CDM) schema name
Model Configuration -	Cohort Data Mart (CDM) schema password
part 3	Clinical Genomics (cga) schema name
	Clinical Genomics (cga) schema password
Service Configuration	 To provide the service configuration now, select Yes and click Next to go to the next step (File Upload Service Configuration).
	 To provide the service configuration after the installation, select No and click Next to proceed to the Summary screen.
File Upload Service	Enter values for the following fields:
Configuration	File retention period in days
	File storage location
	Max file size in MB
	Max zip extract size in MB
	Simultaneous upload limit



- Screen	Action
Omics Loader Service Configuration	 Enter values for the following fields: Oracle data directory object Ensembl and SwissProt directory
Summary	Click Install.
End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.

Check the Installation

-	Steps
	Check the log file located in ORACLE_BASE/oraInventory/logs.
	Review the generated installation log files for errors. For details, see Middle-Tier Troubleshooting .
	Contact Oracle support, if necessary, to resolve any errors.

Installing the Middle-Tier on a Secondary Node

Complete the following:

- Check Prerequisites
- Prepare the Installer
- Run the Installer
- Check the Installation

Check Prerequisites

-	Steps
	Make sure that the database compatible parameter is set to 19.3.0.0.0 by connecting to the DBA user and running the query below:
	<pre>select * from v\$parameter where name = 'compatible';</pre>
	If the parameter is not set to 19.3.0.0.0, ask your database administrator to set it.
	Oracle Fusion Middleware Infrastructure is installed on the machine in the same file system location as on the primary node.
	There is no Oracle WebLogic Server domain named "oh_domain" on the machine.
	All Oracle Healthcare Foundation Data Model schemas exist.
	The Oracle external table DIRECTORY object is created for Omics Data Bank.



Prepare the Installer

- Steps
Extract the contents of the Oracle Healthcare Foundation media pack to your secondary node system.
Open the <i>media_pack_locationl</i> folder.
Unzip the p37792720_82500_Generic.zip file where you want to launch the installer using the following command:
unzip -a p37792720_82500_Generic.zip
Open the Disk1/install folder.
Change the protection on the files as follows: chmod 755 *

Run the Installer

Start the Oracle Universal Installer (OUI) by running the following command.

./runInstaller -local

where, the <code>-local</code> option is to install on the local node irrespective of the cluster nodes specified on the installer machine.

Follow the instructions below for each screen in the installation wizard:

- Screen	Action
Welcome	Click Next.
Select a Product to Install	Select the Oracle Healthcare Foundation Middle-Tier 8.2.5.0.0 option.
Specify Home Details	Enter the Middle-Tier install home name and location.
Choose Install Type	Select Yes to perform a fresh installation.
Verify Install Prerequisites	Verify if all the prerequisites are met.
Java Home	Specify the JDK installation path. The installer validates this path.
Oracle Fusion Middleware Home	Specify the WebLogic with ADF installation path. The installer validates this path.
Cluster Configuration	Select No to migrate an existing domain created by running this installer on the primary node to scale the cluster and add more machines to the domain.
AdminServer	Enter values for the following fields:
Configuration	 Listen address - Running AdminServer listen address provided as part of the primary node installation
	 Listen port - Running AdminServer listen port provided as part of the primary node installation
	 SSL listen port - Running AdminServer SSL listen port provided as part of the primary node installation
	User name - Oracle WebLogic Server administrator user
	Password - Oracle WebLogic Server administrator password



- Screen	Action
NodeManager	Enter values for the following fields:
Configuration	Listen address
	Listen port
	User name
	 Password
	 Verify password
Managed Server	Enter values for the following fields:
Configuration	Number of Managed Servers on this Machine
	 Managed Servers listen port start index - This is used to increment the port number. For example, if the number of managed servers is 3, and the listen port start index is 8081, three managed servers with listen ports 8081, 8082, and 8083 are created.
Summary	Click Install.
End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.

Check the Installation

-	Steps
	Check the log file located in ORACLE_BASE/oraInventory/logs.
	Review the generated installation log files for errors. For details, see Table 20-1.
	Contact Oracle support, if necessary, to resolve any errors.



6

JDBC GridLink Data Source Configuration (optional)

You can optionally configure the Oracle WebLogic Server GridLink data source to distribute database connections to Oracle RAC instances.

Before you create a multi-data source, edit the existing generic data source, create the generic data sources that the multi-data source will manage, and deploy them to the same targets where you want to deploy the multi-data source. You can create data sources and multi-data sources in a single edit session.

- Edit the Existing Generic Data Source
- Create the JDBC GridLink Data Source

Edit the Existing Generic Data Source

- Steps
Navigate to Administration Console > Change Center, click Lock & Edit.
In the Domain Structure tree, expand Services and select Data Sources .
Select the desired data source and, under the Configuration tab, select General .
Change JNDI Name to a unique value.
Note: You can use a numeric suffix, like -1, to make a value unique. For instance, you can change "jdbc/OHF-ODB" to "jdbc/OHF-ODB-1"
Click Save to save the JDBC data source changes.
Navigate to Administration Console > Change Center then click Activate Changes.
Note: Not all changes take effect immediately. Some changes can require a restart.
Follow the instructions described in https://support.oracle.com/epmos/faces/
DocumentDisplay?&id=1382656.1, using the following parameters:
- Steps
The data source Name and JNDI Name must be unique.
Use the JNDI Name used by the application. For OMICS, this is jdbc/OHF-ODB.

- Steps

Use the following default values for Oracle Healthcare Foundation Data Source creation:

- Add the following value to Properties: oracle.jdbc.defaultRowPrefetch=100
- Initial Capacity: 10
- Maximum Capacity: 10
- Minimum Capacity: 10
- Wrap Data Types: Unchecked for Omics Data Source



7

Oracle Healthcare Foundation Omics Data Bank Loaders Installation

You can load Omics data files by using REST APIs or PL/SQL loaders.

For information on how to load Omics data files using REST APIs, see the *Oracle Healthcare Foundation Application Programming Interface Guide*.

For information on how to load Omics data files using PL/SQL loaders, follow the instructions below:

- Prerequisites
- Installing the Oracle Healthcare Foundation Omics Data Bank Loaders
 Copy Omics Data Bank loaders from the data model folder to the ODB loaders folder.

Prerequisites

To install Omics Data Bank Loaders, the Data Model must be installed. For Data Model installation instructions, see Data Model Installation.

Installing Java

- 1. Download the JRE 1.8 from http://www.oracle.com/technetwork/java/javase/downloads/index-jsp-138363.html
- 2. Install the JRE on the system that you will use as the client tier. The EMBL and Swissprot loaders require JRE 1.8 to be installed on the machine from where they will be run.
- 3. Make sure that the path for Java 1.8 is set in the environment variable.



If you plan to execute multiple loaders, make sure that you execute each loader from a separate directory. You must copy .sh/.bat files to another directory to execute the loaders in parallel.

Installing the Oracle Healthcare Foundation Omics Data Bank Loaders

Copy Omics Data Bank loaders from the data model folder to the ODB loaders folder.

 Copy the ODB Loaders folder or ODB_Loaders.zip file from OHF_DATA_MODEL_INSTALL_HOME / to ODBLoaders_Home.

For example:

2. To execute the loaders on an operating system that supports the bash shell command language, make sure that the .sh files have execute privileges.

For example:

chmod +x filename

For more details, refer to the Omics Data Bank chapter in the *Oracle Healthcare Foundation Programmer's Guide*.



8

Oracle Healthcare Foundation Self-Service Analytics Installation

This chapter describes how to install the Oracle Healthcare Foundation (OHF) Self-Service Analytics:

- Installation Overview
- Prerequisites
- Install the Oracle Healthcare Foundation Self-Service Analytics
- Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server

Installation Overview

Oracle Healthcare Foundation Self-Service Analytics (SSA) is available in the media pack. It is an optional component that can be installed to perform Self Service Analytics using Oracle Analytics Server.

Oracle Healthcare Foundation SSA consists of the following components:

- Oracle Analytics Server RPD file for the Healthcare Common Data Mart, which is used for Self-Service Analytics.
- Oracle Analytics Server Catalog File with reports and dashboards built using the Oracle Analytics Server RPD file for the Healthcare Common Data Mart, covering various subject areas.
- Self-Service Analytics tool, to generate an Oracle Analytics Server RPD file for data marts built based on the Healthcare Common Data Mart.

Prerequisites

Oracle Healthcare Foundation Data Model must be installed. For other prerequisites, see Software Requirements.

Install the Oracle Healthcare Foundation Self-Service Analytics

Oracle Healthcare Foundation Self-Service Analytics (SSA) is available in the media pack at this location:/selfserviceanalytics/hcd_rpd/ohf_ssa_hcd.rpd. It is an optional component that can be installed to perform Self-Service Analytics using Oracle Analytics Server (OBIEE).



A default password is required to open the <code>ohf_ssa_hcd.rpd</code> file from the Oracle Business Intelligence Developer Client Tool (12.2.1.4.0). If you do not have the default password, raise a Service Request with theOracle Healthcare Foundation support team and request the default password. Remember to change the password after you access the file with the default password.

- 1. Download and install the Oracle Analytics Developer Client Tool (12.2.1.4.0):
 - a. From your browser, click Oracle Business Intelligence 12c (12.2.1.4.0) Downloads to go to the downloads page.
 - Scroll down and and select the link under Oracle Business Intelligence Developer Client Tool to download the tool.



- c. Unzip bi client 12.2.1.4.0 Windows.X64.zip.
- d. Open bi client 12.2.1.4.0 Windows.X64 in your download folder.
- e. Run setup_bi_client-12.2.1.4.0-win64.exe and follow the prompts to install the software.

The Oracle Business Intelligence Client Tool is now installed.

2. Navigate to the **selfserviceanalytics** folder in the media pack and copy the ofh ssa hcd.rpd file from your Linux environment to your client desktop.

The structure of the Self-Service Analytics directory:

```
/selfserviceanalytics
/hcd_rpd
ohf_ssa_hcd.rpd
obieeIds.csv
/hcd_catalog
Oracle Healthcare Foundation.catalog
Oracle Healthcare Foundation Images.catalog
/software
ohf_ssa_tool.zip
```

- From the Windows Start menu, select Oracle Business Intelligence Client > Administration.
- 4. Select File > Open and select the ohf ssa hcd.rpd file.
- **5.** Enter the default password.
- 6. Complete the following steps:
 - Navigate to Manage > Variables, update the default value of the puser variable to point to the HCD schema name, and click OK.

- In the Physical layer, expand localhost and double-click Relation Connection.
 - Update the Data source name with the database host name, port number, and service name where the HCD schema is installed.
 - Update the HCD schema password and confirm.
- In the Physical layer, expand localhost and double-click Initialization Block Connection.
 - Update the Data source name with the database host name, port number, and service name where the HCD schema is installed.
 - Update the HCD schema password and confirm.
- In the Physical layer, expand OHF Data Lineage and double-click OHF Data Lineage Connection Pool.
 - Update the Data source name with the database host name, port number, and service name of the Enterprise Schema (ENT).
 - Update the ENT schema password and confirm.
- 7. Select **File** > **Change Password** and enter a new password for the repository file.
- 8. Save the ohf_ssa_hcd.rpd file and select No when prompted for a consistency check.
- Deploy RPD on the Oracle Analytics Server server:
 - a. Create an Oracle Analytics Server domain. For details, see: https://docs.oracle.com/middleware/1221/core/BIEIG/GUID-4F0BD89A-C8 BE-4851-8D0C-422779D5BC1D.htm#INSOA375.
 - b. Navigate to the [OBIEE_HOME]/user_projects/domains/bi/bitools/bin folder.
 - c. Use the datamodel.sh command line utility to upload the RPD file to the Oracle Analytics Server server (look in the OBIEE Home/user_projects/domains/bi/bidata/service instances directory to find the service instance name):
 - ./datamodel.sh uploadrpd -I location of rpd file to be uploaded -W RPDpwd -SI service instance name -U weblogic user -P weblogic password
- 10. Create a folder OHF_SSA_HOME in a preferred drive.
- 11. Copy the ohf_ssa_tool.zip file available in the selfserviceanalytics\software folder to the OHF_SSA_HOME folder.
- 12. Extract the contents of the ohf_ssa_tool.zip file in the OHF_SSA_HOME folder.
 The Self-Service Analytics tool is now available in the OHF_SSA_HOME\ohf_ssa_tool folder.

For details on how to generate the Oracle Analytics Server RPD using the Self-Service Analytics tool, see the *Oracle Healthcare Foundation Programmer's Guide*.

For details on how to set up the Usage Tracking feature, see the *Oracle Healthcare Foundation Dashboards User's Guide*.

Deploy the Oracle Healthcare Foundation Catalog in Oracle Analytics Server

 Open the Oracle Analytics Server Analytics Page in a Web browser. For example: http://obiee host name:port number/analytics.



- 2. Navigate to the Catalog menu and, under Shared Folders, click Unarchive.
- 3. Specify the path to the Oracle Healthcare Foundation catalog file:

OHF Media Pack/selfserviceanalytics/hcd_catalog/ Oracle Healthcare Foundation.catalog

- In the Unarchive pop-up window, select None in the Replace field and select Preserve in the ACL field. Click OK.
- 5. Under the Catalog Menu, select **Shared Folders**. Click **Unarchive**.
- **6.** Specify the path to the Oracle Healthcare Foundation images catalog file:

OHF Media Pack/selfserviceanalytics/hcd_catalog/ Oracle Healthcare Foundation Images.catalog

7. In the Unarchive pop-up window, select **None** in the Replace field and select **Preserve** in the ACL field. Click **OK**.

The Oracle Healthcare Foundation catalog is now deployed in the Oracle Analytics Server shared folders location as Oracle Healthcare Foundation.

To test if the catalog has been deployed successfully, see if the Oracle Healthcare Foundation entry is available under **Dashboards** > **My Dashboards**.



9

Oracle Healthcare Foundation Installation on ADW (ODI)



For information on Middle tier installation on Weblogic Market place, refer to Oracle Healthcare Translational Research Installation Guide.

This chapter includes installation information for the following:

- Data Model Installation on ADW
- Data Management Assembly for OCI Marketplace Oracle Data Integrator Installation

Data Model Installation on ADW

This section includes the following topics:

- Prerequisites
- Prepare the Installer
- · Run the Installer
- Check the Installation


Prerequisites

	- Prerequisites
	ADW instance up and running. Database version 19c.
	Note: This feature is not supported on database 12c.
	-
	OCI VM instance with Oracle Client credentials of ADW connections updated.
	Create OHF schemas with the ohf_dm_schemas.sql script.
Prepare the	Installer
	- Prepare the Installer
	Extract the contents of the OHF media pack to any OCI VM instance or to ODI VM instance itself.



- Prepare the Installer
Make a new directory OHF installation home - <ohf_install_home>.</ohf_install_home>
Copy the OHF media pack to <ohf_install_home>/.</ohf_install_home>
Unzip the OHF_825_Linux-x64.zip file where you want to launch the installer using the following command:
unzip -a OHF_825_Linux-x64.zip
Open the Disk1/stage/Components/oracle.hsgbu.hc.datamodel/8.2.5.0.0/1/DataFiles/Expanded/filegroup1 folder.
There are two zip files in this folder:
 master install.zip
• ODB_Loaders.zip
Copy the master_install.zip file to OHF installation home.
<pre>cp master_install.zip <ohf_install_home>/</ohf_install_home></pre>
Unzip master_install.zip in the <ohf_install_home>/master_install folder.</ohf_install_home>
unzip -a master_install.zip
Change the protection on files as follows:
chmod 755 *
Update user parameters with the OHF pre-created schema in the <ohf_install_home>/ master_install/ohf_dm_installer.sh script.</ohf_install_home>
db_conn (ADW service name)
hdi_schema
hdm_schema
hcd_schema
cdm_schema
odb_schema
enterprise_schema
job_schema
svcs_schema
cga_schema
The remaining parameters have fixed values and Oracle recommends that you do not change these values. Schema passwords are prompted while running the script.



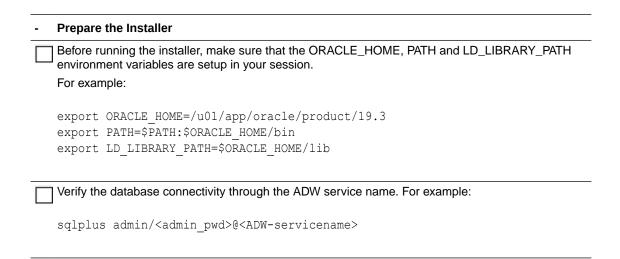

Run the Installer

Run the following script from <OHF INSTALL HOME>/master install folder:

sh OHF_DM_INSTALLER.sh

Check the Installation

If there are install errors, ohf install log.err is generated in this location.

Data Management Assembly for OCI Marketplace Oracle Data Integrator Installation

This section includes the following topics:

- Prerequisites
- Prepare the Installer
- Run the Installer
- Check the Installation
- Post-DMA Installation Steps



Prerequisites

Prerequisites

Install ODI from OCI marketplace by selecting option - Create new ODI Repository in an Autonomous Database (such as OHADW00) and provide schema prefix as OHF. This creates a default empty ODI repository and a default standalone agent.

This is required to install the OHF DMA components. Refer to: https://docs.oracle.com/en/middleware/fusion-middleware/data-integrator/14.1.2/dimgs/getting-started-oracle-cloud-marketplace.html#GUID-1793F6A6-8581-465D-BBE3-8F0C8ADD6536

Log in to the ODI marketplace VM instance and Install Oracle instant client (including Basic Package (ZIP), SQL*Plus Package (ZIP), Tools Package (ZIP).

- Copy tnsnames.ora and sqlnet.ora from wallet location (for example: /u01/ oracle/mwh/wallets/wallet_OHADW00/) to <Oracle Client Home>/ network/admin/location.
- 2. Update sqlnet.ora file in the <Oracle Client Home>/network/admin/ with the wallet directory (for example: /u01/oracle/mwh/wallets/wallet OHADW00).

Note:

If ODI repositories and OHF schemas resides in different autonomous datawarehouse then add OHF ADW wallet file (for e.g. wallet_OHFADW01.zip) to /u01/oracle/mwh/wallets/ location and unzip the wallet to its corresponding folder /wallet_OHFADW01.

Add tns entry of OHF schemas ADW connections in <Oracle Client Home>/network/admin/tnsnames.ora and update the wallet directory in the TNS entry as below.

For example:

```
ohadw01_low = (description= (retry_count=20)
(retry_delay=3)
(address=(protocol=tcps) (port=1522) (host=adb.uk-
london-1.oraclecloud.com))
(connect_data=(service_name=xyzxyzxyzhhyhy_ohadw00_l
ow.adb.oraclecloud.com))
(security=(ssl_server_cert_dn="CN=adwc.eucom-
central-1.oraclecloud.com,
OU=Oracle BMCS FRANKFURT,O=Oracle
Corporation,L=Redwood City,ST=California,C=US")
(MY_WALLET_DIRECTORY=/u01/oracle/mwh/wallets/
wallet_OHADW01)))
```

Log in to the ODI marketplace VM instance as the **opc** user and install the ksh and oci cli using **opc** as the root user if these are not already installed.

```
yum install ksh
yum install python36-oci-cli (check the latest version)
```



	- Prerequisites
	Log in to the ODI marketplace VM instance as the oracle user and perform oci config by running below command:
	oci setup config
	Refer to the following: https://docs.oracle.com/en-us/iaas/Content/API/SDKDocs/cliinstall.htm
Prepare the	Installer
	- Steps
	Extract the contents of the OHF media pack to ODI VM instance.
	Make a new directory for the OHF installation home, <ohf_install_home>.</ohf_install_home>
	Copy the OHF media pack to <ohf_install_home>/.</ohf_install_home>
	Unzip the OHF_825_Linux-x64.zip file where you want to launch the installer using the following command:
	unzip -a OHF_825_Linux-x64.zip
	The following zip is available:
	dma_odi_master_install_adw.zip
	Copy the dma_odi_master_install_adw.zip file to OHF installation home.
	<pre>cp dma_odi_master_install_adw.zip <ohf_install_home>/ dma_odi_master_install_adw</ohf_install_home></pre>
	Unzip dma_odi_master_install_adw.zip in the <ohf_install_home>/ dma_odi_master_install_adw folder:</ohf_install_home>
	unzip -a dma_odi_master_install_adw.zip
	Change the protection on files as follows:
	chmod 755 *



- Steps

Update the following user parameters in the <OHF_INSTALL_HOME>/
dma_odi_master_install_adw/ODI_SETENV_CREATE.ksh script.

ORAHOME

Oracle home directory

BASEDIR

Installation home directory

ODIHOME

ODI home directory

ODICREDFILE

ODI ADW wallet credential file location

ODIDBSRVNM

OHF data model ADW service name

HDIUSR

HDI schema name

HDMUSR

HDM schema name

HCDUSR

HCD schema name

CDMUSR

CDM schema name

ENTUSR

ENT schema name

WILHMCUSR

WIL_HMC schema name

ATHMCUSR

AT_HMC schema name

OHFODIREPUSR

ODI repository schema created during ODI marketplace installation

NAMESPACE

OCI Namespace

OCIOBJSTRSHORTURL

OCI Object Storage short URI

OHFBUCKETNAME

OCI Bucket name to upload ODI repository dump

OHFCREDNAME

Unique name for credential to store your Cloud Object Storage credential by using DBMS_CREDENTIAL.CREATE_CREDENTIAL

CREDUSERNAME

Credential user name for object storage access. Refer to:

https://docs.oracle.com/en/cloud/paas/autonomous-database/adbbk/#articletitle



The remainder of the parameters have fixed values and Oracle recommends that you do not change these values. Schema passwords are prompted while running the script. Apply the following grants to the ODI repository schema (created during the ODI marketplace installation): grant execute on DBMS_CLOUD to <OHFODIREPUSR>; grant read, write on directory data_pump_dir to <OHFODIREPUSR>; Before running the installer, make sure that the ORACLE_HOME, PATH and LD_LIBRARY_PATH environment variables are setup in your session. For example: export ORACLE_HOME=/u01/app/oracle/product/19.3 export PATH=\$PATH:\$ORACLE_HOME/bin export LD_LIBRARY_PATH=\$ORACLE_HOME Verify the database connectivity through the adw service names, such as: sqlplus admin/<admin_pwd>@<ADW-servicename>

Run the Installer

Run the following script from the <OHF_INSTALL_HOME>/dma_odi_master_install_adw folder:

```
sh OHF DMA INSTALLER.ksh
```

Check the Installation

Review the generated installation log files for errors.

Check the DMA HMC install log file hmc_install_log.log and error file hmc_install_log.err under the <OHF_INSTALL_HOME>/ dma_odi_master_install_adw/hmc_odi_install folder.

Check the DMA ODI install log file dma_etl_install.log under the <OHF_INSTALL_HOME>/dma_odi_master_install_adw/dmalogs folder.

The .done and .err files are generated under the following directory:

<OHF INSTALL HOME>/dma odi master install adw/dmalogs/tmplogs

Post-DMA Installation Steps

-	Steps
	Log in to the ODI marketplace VM instance.




-	Steps			
	Restart the ODI agent (/u	101/oracle/mwh	/odi/	common/scripts) from the root user.
	sudo systemctl stop	=		
	<pre>sudo systemctl start sudo systemctl statu</pre>	-		
	sado systemeer seate	agencour.berv	100	
	Launch the ODI studio an OHF_ODI_REPO.	d create a connectio	n to the	ODI repository, for example,
ш	Topology > Repositories >	Work Repositories:	> OHF_	rk repository connection information from _WORKREP Update schema password of ice name as either low, medium, or high).
ш		r > Technologies > U ther low, medium, or	pdate S	and update the OHF Schema connection Schema password and Connection Details or the Schemas shown.
	? Start Page × 1 HDI			
	Test Connection Discover Al	DBs		
	Definition			
	JDBC	Data Server		
	On Connect/Disconnect	Name:		HDI
	Datasources Version	Instance / dblink (Data :	Server):	ohadw00_low
	Privileges	Connection		
	Flexfields	User:	HDI	
		Password:	•••••	
		JNDI Connection	Use	Credential File
☐ Crendential Details				
		Credential File:	/u01/or	acle/mwh/wallets/wallet_OHADW00.zip
		Connection Details:	ohadw0	0_low
		Use Http Proxy		



- Steps

 $\begin{tabular}{ll} \begin{tabular}{ll} \beg$

Maximum Column Name Length = 35

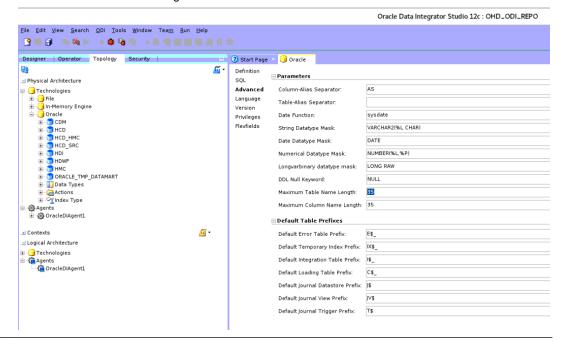



10

Oracle Healthcare Foundation Installation on ADW DMA (Informatica)



For information on Middle tier installation on Weblogic Market place, refer to Oracle Healthcare Translational Research Installation Guide.

This chapter includes installation information for the following:

- · DM Installation on ADW DB server
- DMA Installation on ADW DB server
- DMA Repository Installation on Informatica server
- Create Users in Repository Database

DM Installation on ADW DB server

This section includes the following topics:

- Prerequisites
- Prepare the Installer
- Run the Installer
- Check the Installation

Prerequisites

Prerequisites
Upgrade to OHF 8.2.5 before upgrading to INFORMATICA 10.5.3.
ADW instance up and running. Database version 19c.
Note: This feature is not supported on database 12c.
OCI VM instance with Oracle Client credentials of ADW connections updated.
Create OHF schemas with the ohf_dm_schemas.sql script.



Prepare the Installer

- Prepare the Installer
Extract the contents of the OHF media pack to any OCI VM instance or to ODI VM instance itself.
Make a new directory OHF installation home - <ohf_install_home>.</ohf_install_home>
Copy the OHF media pack to <ohf_install_home>/.</ohf_install_home>
Unzip the OHF_825_Linux-x64.zip file where you want to launch the installer using the following command:
unzip -a OHF_825_Linux-x64.zip
Open the Disk1/stage/Components/oracle.hsgbu.hc.datamodel/8.2.5.0.0/1/DataFiles/Expanded/filegroup1 folder.
There are two zip files in this folder:
master_install.zip
• ODB_Loaders.zip
Copy the master_install.zip file to OHF installation home.
<pre>cp master_install.zip <ohf_install_home>/</ohf_install_home></pre>
Unzip master_install.zip in the <ohf_install_home>/master_install folder.</ohf_install_home>
unzip -a master_install.zip
Change the protection on files as follows:
chmod 755 *
Update user parameters with the OHF pre-created schema in the <ohf_install_home>/ master_install/ohf_dm_installer.sh script.</ohf_install_home>
db_conn (ADW service name)
hdi_schema
hdm_schema
hcd_schema
cdm_schema
odb_schema
enterprise_schema
job_schema
svcs_schema
cga_schema
The remaining parameters have fixed values and Oracle recommends that you do not change these values. Schema passwords are prompted while running the script.

- Prepare the Installer Before running the installer, make sure that the ORACLE_HOME, PATH and LD_LIBRARY_PATH environment variables are setup in your session. For example: export ORACLE_HOME=/u01/app/oracle/product/19.3 export PATH=\$PATH:\$ORACLE_HOME/bin export LD_LIBRARY_PATH=\$ORACLE_HOME/lib Verify the database connectivity through the ADW service name. For example: sqlplus admin/<admin_pwd>@<ADW-servicename>

Run the Installer

Run the following script from <OHF INSTALL HOME>/master install folder:

sh OHF_DM_INSTALLER.sh

Check the Installation

Check the $ohf_install_log.log.under < OHF_INSTALL_HOME > / master_install folder.$

If there are install errors, ohf install log.err is generated in this location.

DMA Installation on ADW DB server

This section includes the following topics:

- Prerequisites for ADW DMA
- Prepare the Installer for OHF DMA Install
- · Run the DMA HMC Installer
- Check the Installation

Prerequisites for ADW DMA

- Prerequisites	
ADW instance up an	nd running. Database version 19c.
	Note: This feature is not supported on database 12c.

	- Prerequisites
	OCI VM instance with Oracle Client credentials of ADW connections updated.
Prepare the	Installer for OHF DMA Install
	- Prepare the Installer
	Extract the contents of the OHF media pack to any VM instance (which can connect to ADW).
	Make a new directory OHF installation home <ohf_install_home> .</ohf_install_home>
	Copy the OHF media pack to <ohf_install_home>/.</ohf_install_home>
	Unzip the OHF_825_Linux-x64.zip file where you want to launch the installer using the following command:
	unzip -a OHF 825 Linux-x64.zip

Open the Disk1/stage/Components/oracle.hsgbu.hc.dma.infa/8.2.5.0.0/1/DataFiles/Expanded/filegroup1 folder. There is a zip file in the folder:

• dma_infa_master_install.zip

 $\begin{tabular}{ll} \hline \begin{tabular}{ll} Copy the $\tt dma_infa_master_install.zip file to OHF installation home. \\ \end{tabular}$

cp dma_infa_master_install.zip <OHF_INSTALL_HOME>/dma_infa_master_install

Unzip dma_infa_master_install.zip in the <OHF_INSTALL_HOME>/
dma_infa_master_install folder.

unzip -a dma_infa_master_install.zip

Change the protection on files as follows:

chmod 755 *



- Prepare the Installer

Update user parameters with the OHF pre-created schema in the <OHF_INSTALL_HOME>/ dma_infa_master_install/ADW_INFA_SETENV_CREATE.ksh script.

Table 10-1 Parameters

Parameter	Description
ORAHOME	Oracle home directory
BASEDIR	Installation home directory
OHFCRDFILE	OHF ADW wallet credential file location
OHFDBSRVNM	OHF data model ADW service name
HDIUSR	HDI schema name
HDMUSR	HDM schema name
HCDUSR	HCD schema name
CDMUSR	CDM schema name
ENTUSR	ENT schema name
WILHMCUSR	WIL_HMC schema name
ATHMCUSR	AT_HMC schema name or HCD_HMC schema name. Both are the same.

The remaining parameters have fixed values and Oracle recommends that you do not change these values. Schema passwords are prompted while running the script.

Before running the installer, make sure that the ORACLE_HOME, PATH and LD_LIBRARY_PATH environment variables are setup in your session.

For example:

export ORACLE_HOME=/u01/oracle/instantclient_19_9
export LD_LIBRARY_PATH=\$ORACLE_HOME/lib
export PATH=\$PATH:\$ORACLE_HOME/bin

Verify the database connectivity through the ADW service names. For example:

sqlplus admin/<admin_pwd>@<ADW-servicename>

Run the DMA HMC Installer

Run the following script from <OHF INSTALL HOME>/dma infa master install folder:

sh ADW_INFA_DMA_HMC_INSTALLER.ksh

Check the Installation

Review the generated installation log files for errors. Check the DMA HMC install log file: hmc install log.log and error file hmc install log.err under

<OHF INSTALL HOME>/dma infa master install/hmc infa install folder.

DMA Repository Installation on Informatica server

This section includes the following topics:

- Prerequisites
- Prepare the Installer for OHF INFA Repository Install
- Run the DMA Repository Installer
- Check the Installation
- Post-DMA Installation Steps

Prerequisites

-	Pre	erequisites	
	Log	g in to the Database on the Informatica server.	
	Create OHF DMA Repository schemas (pre-created) with the ohf_dma_rep_schemas.sql script.		
		Note: See the following section for an example of creating users: Create Users in Repository Database.	
	Log	g in to the Informatica server and go to <oracle client="" home="">/network/admin path.</oracle>	
	1.	Copy content of tnsnames.ora and sqlnet.ora from wallet location (for example: /u01/oracle/mwh/wallets/wallet_OHADW00/) to <oracle client="" home="">/network/admin/ for tnsnames.ora and sqlnet.ora location.</oracle>	
	2.	Update sqlnet.ora file in the <oracle client="" home="">/network/admin/ with the wallet directory (for example: /u01/oracle/mwh/wallets/wallet_OHADW00) For example:</oracle>	
		<pre>WALLET_LOCATION = (SOURCE = (METHOD = file) (METHOD_DATA = (DIRECTORY=/u01/app/Oracle/product/12.2.0/dbhome_1/ network/admin/Wallet_OHADW00))) SSL_SERVER_DN_MATCH=yes</pre>	
		date tnsnames.ora file in the <oracle client="" home="">/network/admin/ by adding ADW tnsnames.ora file values or content.</oracle>	
In	sta	aller for OHF INFA Repository Install	
-	Ste	eps	
	Ext	ract the contents of the OHF media pack to INFORMATICA VM instance.	
Г] Ma	ke a new directory for the OHF installation home: <ohf home="" install="">.</ohf>	

Prepare the

-	Steps
	Copy the OHF media pack to <ohf_install_home>/.</ohf_install_home>
	Unzip the <code>OHF_825_Linux-x64.zip</code> file where you want to launch the installer using the following command:
	unzip -a OHF_825_Linux-x64.zip
	<pre>Open the Disk1\stage\Components\oracle.hsgbu.hc.dma.infa\8.2.5.0.0\1\DataFi les\Expanded\filegroup1 folder.</pre>
	The following zip is available: dma_infa_master_install.zip
	Copy the dma_infa_master_install.zip file to OHF installation home.
	<pre>cp dma_infa_master_install.zip <ohf_install_home>/dma_infa_master_install</ohf_install_home></pre>
	<pre>Unzip dma_infa_master_install.zip in the <ohf_install_home>/ dma_infa_master_install folder:</ohf_install_home></pre>
	unzip -a dma_infa_master_install.zip
	Change the protection on files as follows:
	chmod 755 *



- Steps

____Update the following user parameters in the <OHF_INSTALL_HOME>/
dma_infa_master_install/dmascripts /ADW_REP_INFA_SETENV_CREATE.ksh
script.

Table 10-2 Parameters

Parameter	Description
HDWFCRDFILE	OHF ADW wallet credential file location. The same as OHFCRDFILE given in Prepare the Installer for OHF DMA Install.
HDWFDBASID	OHF data model ADW service name. The same as OHFDBSRVNM given in Prepare the Installer for OHF DMA Install.
HDIUSR	HDI schema name
HDMUSR	HDM schema name
WILHMCUSR	WIL_HMC schema name
ATHMCUSR	AT_HMC schema name
HCDUSR	HCD schema name
ORAHOME	Oracle home directory on Informatica server
BASEDIR	Installation home directory
INFAHOME	Informatica home directory
DOMAINNAME	Informatica server Domain name
NODENAME	Informatica server Node name
DOMAINCDPGE	Informatica server Domain code page id ex.106
INFALISCENSE	Informatica License
INFAHOSTSVR	Informatica HOST server name
INFAPORTNO	Informatica server port number
INFAADMINUSER	Informatica Administration user name
INFAREPDBSID	Informatica Repository (database) connection string host:port/servicename Example: 'locathost.oraclevcn.com:1521/orclpdb'
WILREPNAME	Informatica WIL repository name
ATREPNAME	Informatica AT or HCD repository name
WILINTSRVC	Informatica WIL repository Integration service name
ATINTSRVC	Informatica AT or HCD repository Integration service name
WILINFAREPDBUSER	WIL repository data base schema username
ATINFAREPDBUSER	AT or HCD repository data base schema username
WILINFATBSP	WIL repository data base schema user table space name
ATINFATBSP	AT or HCD repository data base schema user table space name
CDMINFATBSP	CDM repository data base schema user table space name
WILINFATMPTBSP	WIL repository data base schema user temporary table space name
ATINFATMPTBSP	AT or HCD repository data base schema user temporary table space name
CDMINFATMPTBSP	CDM repository data base schema user temporary table space name
CDMUSR	CDM schema user name



- Steps

Table 10-2 (Cont.) Parameters

Description
CDM repository data base schema username
Informatica CDM repository name
Informatica CDM repository Integration service name
HLI source files path or TL_SRC_FILES path
Repository schema user table space path on Informatica server
Log file name
ENT / enterprise schema user name
Path for Informatica share folder path ex. INFA_SHARED folder path

The remainder of the parameters have fixed values and Oracle recommends that you do not change these values. Schema passwords are prompted while running the script.

Before running the installer, make sure that the ORACLE_HOME, PATH and LD_LIBRARY_PATH environment variables are setup in your session. For example:

```
export ORACLE_HOME=/u01/app/oracle/product/19.3.0/dbhome_1
export LD_LIBRARY_PATH=$ORACLE_HOME/lib
export PATH=$PATH:$ORACLE_HOME/bin
```

Verify the database connectivity through adw service names, such as:

sqlplus system/<system_pwd>@<Infa_server_DB-servicename>

Run the DMA Repository Installer

Run the following script from the <OHF_INSTALL_HOME>/dma_infa_master_install/dmascripts folder:

sh ADW OHF DMA INFA REP INSTALLER.ksh

Check the Installation

Review the generated installation log files for errors.

Check the DMA INFA install log file dma_etl_install.log under the <OHF_INSTALL_HOME>/dma_infa_master_install/dmalogs folder.

The .done and .err files are generated under the following directory:

<OHF_INSTALL_HOME>/dma_infa_master_install/dmalogs/tmplogs



Post-DMA Installation Steps

_	Steps
	Log in to WIL, HCD, CDM repository and check that the connections are updated as expected.
	Validate the global parameter file entries.

Create Users in Repository Database

The following statements show an example of creating users in the Repository Database:

CREATE TABLESPACE INFA_REP_USER_TS_adw DATAFILE '/u01/app/Oracle/oradata/orcl/orclpdb/INFA_REP_USER_TS_adw.dbf' SIZE 100M AUTOEXTEND ON NEXT 100M MAXSIZE UNLIMITED EXTENT MANAGEMENT LOCAL;

CREATE TEMPORARY TABLESPACE INFA_REP_USER_TMP_TS_adw TEMPFILE '/u01/app/Oracle/oradata/orcl/orclpdb/INFA_REP_USER_TMP_TS_adw.dbf' SIZE 100M AUTOEXTEND ON NEXT 100M MAXSIZE UNLIMITED EXTENT MANAGEMENT LOCAL;

CREATE USER INFA_WIL_REP_DB_USER_adw IDENTIFIED BY Welcome_1111 DEFAULT TABLESPACE INFA_REP_USER_TS_adw TEMPORARY TABLESPACE INFA_REP_USER_TMP_TS_adw QUOTA UNLIMITED ON INFA_REP_USER_TS_adw; GRANT CONNECT, RESOURCE, create any directory, CREATE VIEW TO INFA WIL REP DB USER adw;

CREATE USER INFA_HCD_REP_DB_USER_adw IDENTIFIED BY Welcome_1111 DEFAULT
TABLESPACE INFA_REP_USER_TS_adw TEMPORARY TABLESPACE INFA_REP_USER_TMP_TS_adw
QUOTA UNLIMITED ON INFA_REP_USER_TS_adw;
CRANT CONNECT_RESOURCE groate any directory CREATE VIEW_TO

GRANT CONNECT, RESOURCE, create any directory, CREATE VIEW TO INFA HCD REP DB USER adw;

--GRANT ALTER SESSION, CREATE DIRECTORY, CREATE INDEXTYPE, CREATE JOB, CREATE MATERIALIZED VIEW, CREATE PROCEDURE, CREATE SEQUENCE, CREATE SESSION, CREATE SYNONYM, CREATE TABLE, CREATE TRIGGER, CREATE TYPE, CREATE VIEW TO INFA HCD REP DB USER adw;

CREATE USER INFA_CDM_REP_DB_USER_adw IDENTIFIED BY Welcome_1111 DEFAULT TABLESPACE INFA_REP_USER_TS_adw TEMPORARY TABLESPACE INFA_REP_USER_TMP_TS_adw QUOTA UNLIMITED ON INFA_REP_USER_TS_adw; GRANT CONNECT, RESOURCE, create any directory, CREATE VIEW TO INFA CDM REP DB USER adw;



Part II

Upgrade

In this chapter:

- Data Model Upgrade
- Data Management Assembly for Oracle Data Integrator Upgrade
- Data Management Assembly for Informatica Upgrade
- Middle-Tier Upgrade on the Primary Node
- Upgrade for ADW



Data Model Upgrade

For a list of the supported upgrade paths, see Supported Upgrade Paths.

To upgrade the Oracle Healthcare Foundation (OHF) Data Model, follow the instructions below:

- Check Prerequisites
- Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version
- Data Migration

Check Prerequisites

- Steps
Make sure the Oracle Analytics Server service is shut down.
Make sure Oracle Database 19.3.0.0.0 Enterprise Edition is installed.
Make sure that the database compatible parameter is set to 19.3.0.0.0 by connecting to the DBA user and running the query below:
<pre>select * from v\$parameter where name = 'compatible';</pre>
If the parameter is not set to 19.3.0.0.0, ask your database administrator to set it.
If you are upgrading Oracle Healthcare Foundation on an Exadata environment, make sure the Oracle database patch 19562381 (Doc ID 19562381.8) is applied.
Create a container database with a single pluggable database instance with the help of a Database Administrator.
Make sure the database initialization parameter MAX_STRING_SIZE is set to STANDARD (defauvalue). This parameter cannot be changed to STANDARD if the database is created with MAX_STRING_SIZE set to EXTENDED.
Set the NLS_LENGTH_SEMANTICS parameter to either CHAR or BYTE based on your requirements.
For Oracle Healthcare Foundation Globalization Support information, see <i>Oracle Database Globalization Support Guide</i> and set your database character set accordingly.
Verify if you have a database license for Advanced Compression.
Make sure the password expiry notification message does not display for the Sys, system and all Oracle Healthcare Foundation schemas.



Ste	ps

During upgrade, shutdown weblogic server, Node Manager, refer to https://docs.oracle.com/en/middleware/fusion-middleware/weblogic-server/12.2.1.4/start/index.html

If you have Oracle Healthcare Translational Research (OHTR) 3.1.x installed, make backups of the CDM, Oracle Database, Enterprise, Job Engine and Apps schemas. Import CDM, ODB, Enterprise, Job Engine, and Apps schemas in the database instance created for Oracle Healthcare Foundation (PDB or non-container database).

The CDM, Oracle Database, Enterprise, and Job Engine schemas are updated as part of the Oracle Healthcare Foundation 8.2.5 upgrade. The Apps schema is upgraded during the Oracle Healthcare Translational Research 4.0 upgrade.

If you are importing existing Oracle Healthcare Translational Research CDM schema into different named CDM schema, update the table below after importing the dump. Connect to the Oracle Database schema and run the following commands:

select * from W_EHA_DATASOURCE
 In this table, update the CDM schema name to the new CDM schema name.

Before you upgrade to Oracle Healthcare Foundation 8.2.5, back up the data model schemas of the existing Oracle Healthcare Data Warehouse Foundation (HDWF) environment and the Oracle Healthcare Translational Research schemas (if you have installed older versions of Oracle Healthcare Translational Research).

Identify the manually updated seed data and inconsistent terminology records using the below query and revert the Oracle Healthcare Foundation seed data.

During the upgrade, certain objects are dropped irrespective of prefixes or naming conventions. This includes objects such as packages, stored procedures, views, materialized views, scheduler jobs, and synonyms.

Make a backup of the custom scripts before the upgrade and re-execute the custom scripts for all custom objects after the upgrade.



- Steps

During the upgrade, HCD materialized views will be dropped to replace the underlying sql logic, this requires all the dependent objects to be dropped. Any custom/peer objects referencing the Oracle Healthcare Foundation HCD materialized views will not be dropped by the installer.

Make sure to drop the custom referential integrity constraints before starting the upgrade. Identify the custom objects using the below query:

```
select uc.table name,
               uc.constraint name,
               o.object type
                             from user constraints uc,
                                            user objects o
                             where uc.table name=o.object name
                             and o.object type in ('TABLE', 'VIEW')
                             and uc.constraint type in ('R') -- R =
Referential integrity; U = Unique key; P = Primary key; C = Check
constraint
                             and r constraint name in
(select constraint_name from user_constraints
where table name in (select object name
    from user objects
    where object type in ('MATERIALIZED VIEW')
      and object name like 'W\ HCD\ %' ESCAPE '\'
                and not REGEXP LIKE (object name, ' X+')));
```

Set the GLOBAL_NAMES database initialization parameter to false.

For remote upgrades, make sure the following are available on the client machine:

- Oracle Linux 6.7 (64-bit) OS or above
- Oracle Database 19.3.0.0.0 client with the sqlplus utility
- Client machine should contain Oracle client. If it does not have the client, install Oracle Instant Client, refer to the Troubleshooting section for Install and Configure Oracle Instant Client.

Before you run the Oracle Healthcare Foundation installer to upgrade the existing schema, execute the following query as a SYSTEM user to validate if the data model user has OHF_APPLICATION_ROLE as the default role.

```
select grantee, DEFAULT_ROLE from dba_role_privs where
granted role='OHF APPLICATION ROLE' AND DEFAULT ROLE='NO';
```

Data model users are schema users that are used during the installation of the Oracle Healthcare Foundation Data Model. If this is not a default role, execute the following command as a SYSTEM user to set this as a default role:

```
alter user data model user default role all;
```

Where *data model user* should be assigned to each of the following users:

- Data warehouse schema name (HDM)
- Interface tables schema name (HDI)
- Common data mart schema name (HCD)
- Cohort data mart schema name (CDM)
- Job engine schema name (JOB)
- Services schema name (SVC)
- Omics data bank schema name (ODB)

Note: If you don't have Oracle Healthcare Translational Research products installed, assign data_model_user only to the HDM, HDI, and HCD schemas.



-	Steps
	Make sure that the SELECT privilege on the ALL_TAB_COLS view is granted to the PUBLIC role.
	Log in as a SYS user and execute the following query:
	<pre>select * from dba_tab_privs where table_name = 'ALL_TAB_COLS';</pre>
	If the privilege is not found, execute the below query as SYS user to grant the privileges to the PUBIC role:
	grant select on SYS.ALL_TAB_COLS to PUBLIC with grant option;
	The installer does not validate the tablespace data files location. If the database server is on the remote server, make sure the location physically exists or the installer will fail.

Upgrading from Healthcare Data Warehouse Foundation or a Previous Oracle Healthcare Foundation Version

For the list of supported upgrade paths, see Supported Upgrade Paths.

If you are upgrading from Healthcare Data Warehouse Foundation (HDWF) 6.1 to Oracle Healthcare Foundation, you must install Oracle Healthcare Analytics Data Integration (OHADI) 3.1.



After upgrading, continue to Data Migration for instructions on how to migrate data from Healthcare Data Warehouse Foundation to Oracle Healthcare Foundation.

To upgrade from HDWF 6.1 to Oracle Healthcare Foundation, upgrade the Healthcare Data Warehouse Foundation 6.1 database instance to Oracle Database 19c (version 19.3) Enterprise Edition.

- Prepare the Installer
- Run the Installer
- · Check the Installation

Prepare the Installer

Steps Make sure that all the Oracle Healthcare Foundation schemas are disconnected from the database by querying gv_\$session from the sys user: select * from sys.gv_\$session where status <> 'KILLED' and username in ('<OHF Schemas>');



- Steps
Extract the contents of the Oracle Healthcare Foundation media pack to your system.
Open the <i>media_pack_locationl</i> folder.
Unzip the p37792720_82500_Generic.zip file where you want to launch the installer using the following command: unzip -a p37792720 82500 Generic.zip
Open the Disk1/install folder.
Change the protection on files as follows: chmod 755 *

Run the Installer

Start the Oracle Universal Installer (OUI) using either of the following options:

Option 1: Create newly added tables into existing table space

This option creates newly added tables as part of OHF 8.2.5 onwards into existing tablespaces.

• If the database server (Exadata or non-Exadata) is on the machine where the installer is running, execute:

```
sh runInstaller.sh -local
```

• If the database server is on a different machine, execute: sh runInstaller.sh -local remote installation=true

Option 2: Create newly added tables into extended tablespaces

If existing HDI, HDM, and HCD table spaces exceeds the size limit and cannot be extended further, this option creates newly added tables as part of OHF 8.2.5 onwards into extended tablespaces. Extended table spaces need to be created manually before running the installer.

• If the database server (Exadata or non-Exadata) is on the machine where the installer is running, execute:

```
sh runInstaller.sh -local hdi_extn_tablespace=<"HDI_EXTENDED_TABLESPACE">
hdm_extn_tablespace=<"HDM_ EXTENDED_TABLESPACE">
hcd extn tablespace=<"HCD EXTENDED TABLESPACE">
```

If the database server is on a different machine, execute:

```
sh runInstaller.sh -local remote_installation=true

hdi_extn_tablespace=<"HDI_EXTENDED_TABLESPACE"> hdm_extn_tablespace=<"HDM_
EXTENDED_TABLESPACE"> hcd_extn_tablespace=<"HCD_EXTENDED_TABLESPACE">
```

where:

- The -local option is to install on the local node irrespective of the cluster nodes specified on the installer machine.
- hdi_extn_tablespace is the parameter to pass HDI extended tablespace name to the installer.
- hdm extn tablespace is the parameter to pass the HDM extended tablespace name.
- hcd extn tablespace is the parameter to pass the HCD extended tablespace name.

- Sc	creen	Action
W	/elcome	Click Next.
1 1	elect a Product to stall	Select the Oracle Healthcare Foundation Data Model 8.2.5.0.0 option.
Sp	pecify Home Details	Enter the installation home name and location.
	erify Installation rerequisites	Verify if all of the prerequisites are met before proceeding.
1 1	racle Client Home onfiguration	Specify the Oracle (version 19.3.0.0.0) client home path. The installer validates this path.
□ Da	atabase	Enter values for the following fields:
□ C	onfiguration	 Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine.
		 Port - By default, the port number is 1521. You can edit this field if required.
		Service name
		System user password
		Sys user password
ПТа	able Compression	On an Exadata setup, use the following compression options:
		Interface Tables schema
		Hybrid columnar compression (default)
		No Compression
		Data Warehouse schema
		No Compression (default)
		Advanced Compression: Preferred if updates are high. If you don't have
		a license for Advanced Compression, select Hybrid Columnar Compression .
		Hybrid Columnar Compression
		Common Data Mart schema
		No Compression (default)
		Advanced Compression
		Cohort Data Mart schema
		No Compression (default)
		Advanced Compression
		Omics Data Bank schema
		Hybrid columnar compression (default)
		On a non-Exadata setup, for each of the above schemas, choose either No Compression (default) or Advanced Compression.
	ata Model	Enter values for the pre-created schemas:
ĽС(onfiguration	Interface Tables schema name
		Interface Tables schema password
		Data Warehouse schema name
		Data Warehouse schema password
		Common Data Mart schema name
		Common Data Mart schema password
		Omics Data Bank schema name
		Omics Data Bank schema password



-	Screen	Action
	Data Model Configuration Data Model Configuration Data Model	Enter values for the pre-created schemas. If Oracle Healthcare Translational Research schemas exist, provide the existing schema names, otherwise provide new schema names. Cohort Data Mart schema name Cohort Data Mart password Enterprise schema name Enterprise schema password Job Engine schema name Job Engine schema password Services schema name Services schema password Enter values for the following fields: Clinical Genomics (cga) schema name Clinical Genomics (cga) schema password
	Configuration Verification	
	Omics Data Bank and Cohort Data Mart Parameters	 are currently using for: Result Partition, Promoter Offset, Flanking Offset, and Job Store Name. If you don't have existing Oracle Healthcare Translational Research schemas, then choose appropriate options. Result Partition - Used to partition result tables in the Oracle Database schema. The available options are: GENE (Default) STUDY Promoter Offset - Numerical value to specify a portion of the gene used as a promoter in the Oracle Database schema. The default value is 200. Flanking Offset - Numerical value to specify the region before and after a gene to link results to a gene in the Oracle Database schema. The default value is 200. Max Parallel Degree - An option to specify the maximum degree of parallelism to be set on tables or used in the SQL statements for the CDM or Oracle Database schema. It is dependent on the machine configuration of the database server. The default value is 2. Job Store Name Use the job schema name. Note: If you are using the same database instance for multiple environments, enter a unique job store name for each job schema.
	Summary	Click Install.
	End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.
Inst	allation	
- Steps		
	Review the generated installation log files for errors. For details, see Installation Log Files.	
	Contact Oracle support, if necessary, to resolve any errors.	



Check the

Data Migration

To upgrade from a previous Oracle Healthcare Foundation version or to migrate the data from Healthcare Data Warehouse Foundation 6.1, follow the steps below:

- Check the Migration Scripts
- Execute Schema Migration Scripts After Modifications

Check the Migration Scripts

Data migration for interface tables and data warehouse schema is not performed by the installer. You need to review the data migration scripts in <code>INSTALL_HOME/dm/hdi_install/post_ddl_upgrade.sql</code> and <code>INSTALL_HOME/dm/hdm_install/post_ddl_upgrade.sql</code> (note that there are references to other scripts within the main script). You can modify the scripts before executing them.



Migration scripts execution is mandatory and needs to be completed before the ETL execution.

Note:

Both sections below (Upgrading from Oracle Healthcare Foundation versions earlier than 7.0.1 and Upgrading from an Oracle Healthcare Foundation Version before 7.1) are applicable for migrating from Healthcare Data Warehouse 6.1 to Oracle Healthcare Foundation 8.2.4.

- Upgrading from Oracle Healthcare Foundation versions earlier than 7.0.1
- Upgrading from an Oracle Healthcare Foundation Version before 7.1
- Upgrading from Oracle Healthcare Foundation Versions Earlier than 8.0

Upgrading from Oracle Healthcare Foundation versions earlier than 7.0.1



Not Applicable when upgrading from Oracle Healthcare Foundation 7.1.

- Specimen.Intervention ID/VN is deprecated and data is migrated to Intervention Specimen.
- Specimen Processing Procedure. Specimen Processing Procedure Subtype is added as a mandatory attribute to the Specimen Processing Procedure. This is initialized with the appropriate seed data coded value 'SPP_SUBTYP_GEN' during the migration.
- Schedule Block.Schedule Block Subtype is added as a mandatory attribute to Schedule Block. This is initialized with the appropriate seed data coded value 'SCH_BLCK_SUBTYP_GEN' during the migration.



- Schedule.Service Provider is deprecated and data is transferred to Schedule Service Provider.
- Observation. Specimen ID/VN is deprecated and data is transferred to Observation Specimen. On the interface tables schema, data is transferred from Observation, Assessment, and Image Instance to Observation Specimen.
- Data is migrated from Encounter Service Provider to Encounter. Responsible Service
 Provider for Encounter Service Provider Relationship Type="Responsible Service
 Provider". If the same encounter is associated to multiple service providers for a given
 value of Encounter and Relationship Type="Responsible Service Provider", the service
 provider that was inserted last is migrated to Encounter.
- The integration ID of the parent table is used wherever a new table is populated based on an existing table.
- The migration scripts use the seed data values given below provided by Oracle. If you have used a different set of seed data values in Encounter Service Provider to represent a Responsible Service Provider relationship, change it in the migration script for both Interface Tables and Data Warehouse schema, and run post ddl upgrade.sql.
- The following are the seed data values that are used for filtering Encounter Service Provider. Encounter Service Provider Relationship Type in the migration scripts:
 - HDI_ENC_SVCPRV.ENC_SVCPRV_RLTYP_CD='ENC_SVCPRV_RLSHPTYP_RSPN SBL_SVCPRV' (CD_NM='Responsible Service Provider' AND INTEGRATION_ID='ENC_SVCPRV_RLSHPTYP_RSPNSBL_SVCPRV~EHA_CUSTO M_CD_SYS~1.0' AND SYS_INT_ID='EHA_CUSTOM_CD_SYS~1.0' AND SYS_DAT_SRC_NUM_ID=1 AND CREATED_BY_USER_ID='EHA_USER' AND CREATED_BY_USER_DS_NUM_ID=1)
 - On the Data Warehouse schema, it corresponds to HDM_ENC_SVCPRV.ENC_SVCPRV_RLSHPTYP_ID/VN resolving to the following code: CD='ENC_SVCPRV_RLSHPTYP_RSPNSBL_SVCPRV' AND CD_NM='Responsible Service Provider' AND INTEGRATION_ID='ENC_SVCPRV_RLSHPTYP_RSPNSBL_SVCPRV~EHA_CUSTO M_CD_SYS~1.0'

The values mentioned above are presented in a logical way and are not the exact physical representation of the values present in the migration scripts. See sql files <code>INSTALL_HOME/dm/hdi_install/pkb/hdi_upgrade_7_0.pkb</code> and <code>INSTALL_HOME/dm/hdm_install/pkb/hdm_upgrade_7_0.pkb</code> for the exact seed data values.

 Key steps related to data migration are logged into the HDI_RSLT_LOG and HDM_RSLT_LOG tables in the respective schemas.

Upgrading from an Oracle Healthcare Foundation Version before 7.1



Not applicable when upgrading from Oracle Healthcare Foundation 7.1.

 Bill Line Item.Bill Diagnosis ID/VN is deprecated and the corresponding data is migrated to Bill Diagnosis as new records.



 Claim Line Item.ClaimDiagnosis ID/VN is deprecated and the corresponding data is migrated to Claim Diagnosis as new records.

The values mentioned above are presented in a logical way and are not the exact physical representation of the values in the migration scripts. For exact details, see the SQL files:

```
INSTALL_HOME/dm/hdi_install/pkb/hdi_upgrade_7_1.pkb and
INSTALL HOME/dm/hdm install/pkb/hdm upgrade 7 1.pkb.
```

- HDM_INTVN_SPCMN. INTVN_SPCMN_RLSHPTYP_ID/VN is populated with the value -1 corresponding to the default value of CODEID_NAV configured in the HMC schema. If you have modified the seed data, change the script INSTALL_HOME/dm/hdm_install/post ddl upgrade.sql accordingly.
- Review the integration ID pattern for records populated using the migration scripts and change it accordingly if needed.
- It is assumed that the time stamps for SRC_CHANGED_ON_DT, match from the parent to
 the child reference on the interface schema. For example, the value of
 HDI_ENC_SVCPRV. ENC_SRC_CHANGED_ON_DT should be the same as that of the
 parent. That is, HDI_ENC.SRC_CHANGED_ON_DT for the same record being referred in
 both tables right up to the seconds. If it is not the same, change the migration script
 accordingly.

Upgrading from Oracle Healthcare Foundation Versions Earlier than 8.0

 Bill Line Item.Service Provider ID/VN is deprecated and the corresponding data is migrated to Bill Line Item Service Provider as new records.

The values mentioned above are presented in a logical way and are not the exact physical representation of the values in the migration scripts. For exact details, see the SQL files: <INSTALL_HOME>/dm/hdi_install/pkb/hdi_upgrade_8_0.pkb and <INSTALL_HOME>/dm/hdm_install/pkb/hdm_upgrade_8_0.pkb.

- Review the integration ID pattern for records populated using the migration scripts and change it accordingly if needed.
- It is assumed that the time stamps for SRC_CHANGED_ON_DT match from the parent to
 the child reference on the interface schema. For example, the value of
 HDI_ENC_SVCPRV. ENC_SRC_CHANGED_ON_DT should be same as that of the
 parent, that is, HDI_ENC.SRC_CHANGED_ON_DT for the same record being referred in
 both tables right up to the seconds. If it is not the same, change the migration script
 accordingly.

Execute Schema Migration Scripts After Modifications

Follow the instructions below to migrate the Interface Tables schema:

- Steps
Open the command prompt and navigate to the INSTALL_HOME/dm/hdi_install/ folder.
Connect to the interface tables schema using the SQL*Plus utility.
Execute the script using the command '@post_ddl_upgrade.sql'.
Follow the instructions below to migrate the Data Warehouse schema:



- Steps
Open the command prompt and navigate to the <code>INSTALL_HOME/dm/hdm_install/</code> folder.
Connect to the Data Warehouse schema using the SQL*Plus utility.
Execute the script using the command '@post_ddl_upgrade.sql'.



Data Management Assembly for Oracle Data Integrator Upgrade

For a list of the supported upgrade paths, see Supported Upgrade Paths.

To upgrade the Oracle Healthcare Foundation Data Management Assembly for Oracle Data Integrator (ODI), follow the instructions below:

- Check Prerequisites
- · Prepare the Installer
- Run the Installer
- Check the Installation and Delete E\$_tables
- Create a New Oracle Data Integrator Repository Login

remove them from the existing HMC schema.

Check Prerequisites

Steps	
The user is familiar with Oracle Database (DB), Oracle Data Integrator, and Linux OS.	
The Oracle Healthcare Foundation Data Model is installed.	
Follow the instructions in Data Model Installation or Data Model Upgrade.	
The Data Management Assembly installer is run on the system where the Oracle Data Integrator server is installed.	
Make sure that the database compatible parameter is set to 19.3.0.0.0 by connecting to the DBA user and running the query below:	
<pre>select * from v\$parameter where name = 'compatible';</pre>	
If the parameter is not set to 19.3.0.0.0, ask your database administrator to set it.	
Be sure to backup all custom database objects and custom ETL objects before initiating the Oracle Healthcare Foundation upgrade. Import the custom database objects and custom ETL into the upgraded environment.	
Oracle Healthcare Foundation uses separate HMC schemas for the WIL and HCD loaders. If you have a common HMC schema for OHADI (WIL) and HCD, designate different HMC schemas for WIL (the existing HMC) and HCD (the new HMC_HCD) by performing the following steps:	
1. Create a new HMC schema for HCD loaders. For example: HMC_HCD.	
2. Provide the newly created HMC_HCD schema with the same privileges as the existing HMC schema.	
3. Move the HCD* tables from the existing HMC schema to the new HMC_HCD schema and	



-	Steps		
	Oracle Data Integrator services can connect to the Data Model 8.2.5 database mentioned in the Oracle TNS file (TNS entries of the required database must be available in the installation server tnsnames.ora file).		
	The password expiry notification message does not display for the system user or existing schemas.		
	The terminology loaders source file location exists. The installer creates an archive directory. For example,		
	/scratch/home/oemora/TL_Source is the source file location specified during installation, which already exists.		
	/scratch/home/oemora/TL_Archive_Files is created by the installer as the archive directory.		
	The path of the data file (Configuration schema/Repository schema tablespace) mentioned when creating the tablespace is correct. Make sure that the database user has write privilego		
	Enough space is available in the installation directory and the Oracle Home directory.		
	The Sqlplus utility is available on the installation server.		
	The impdp utility is available on the repository database server.		
	The installation user has read, write, and execute privileges to the <code>\$ODI_HOME/odi/agent/bin</code> folder. The installer creates product-specific files under this location.		
	For remote installations, where the installation server and the Oracle Data Integrator Repository Database server are different machines, make sure that:		
	 A directory from the remote database server is mounted to the installation server with appropriate read and write privileges. 		
	The remote directory is accessible from the installation server upon mounting.		
	 The user that owns Oracle db services on the remote server has privilege 755 for the directory that has been mounted on the installation server. 		
	 If the database is on an Exadata machine, provide the database single node (the node which is mounted) as the host name when prompted during installation. 		
	ODI app machine should contain Oracle client. If it does not have the client, install Oracle Instant Client. Refer to the Troubleshooting section for Install and Configure Oracle Instant Client.		
	GLOBAL_NAMES database initialization parameter is set to false.		
	Back up the following csv files under <code>\$ODI_HOME/odi/agent/bin</code> if it exists:		
	• bus_susp_day.csv		
	• daylght_svngs_day.csv		
	• hosp_hol_day.csv		
	• time_odi.csv		



-	Steps		
	If the Terminology Loaders source folder is shared, make a backup of the following files:		
	• Code Axes.txt		
	• Code Descriptions.txt		
	• Code Hierarchy.txt		
	• Code.txt		
	• Related Entity.txt		
	• Relations Type.txt		
	• Relations.txt		
	• Relationship Type.txt		
	• time.txt		
	The installer will overwrite any existing files from the list above.		
	If any previous ETLs are in the failed status, make sure that they execute successfully before upgrading.		
	Make sure that the data models are upgraded to Oracle Healthcare Foundation 8.2.5.		
	The OUI displays default configuration schema (hmc) names. You must change these schema names to the existing hmc schema names.		
	The installer upgrades the configuration schemas to Oracle Healthcare Foundation 8.2.5.		
	Back up the existing hmc schemas.		
, P	Note:		

Prepare the Installer

-	Steps
	Extract the contents of the Oracle Healthcare Foundation media pack to your system.
	Navigate to the <i>media_pack_locationl</i> folder.
	Unzip the p37792720_82500_Generic.zip file where you want to launch the installer using the following command: unzip -a p37792720 82500 Generic.zip
	Navigate to the Disk1/install folder.
	Change the protection on files as follows: chmod 755 *

The installer auto-populates some of the user parameters and lets you edit them.

Run the Installer

Start the Oracle Universal Installer by running the following command:

• If the Oracle Data Integrator repository schemas (master and work) to be created are on the database instance of the installation server, execute:

sh runInstaller.sh -local

• If the Oracle Data Integrator repository database or Oracle Healthcare Foundation data model database is on the database instance of another server, execute:

sh runInstaller.sh -local remote_installation=true

where, the <code>-local</code> option is to install on the local node irrespective of the cluster nodes specified on the installer machine.

- Screen	Action
Welcome	Click Next.
Select a Product to Install	Select the Oracle Healthcare Foundation Data Management Assembly for ODI 8.2.5.0.0 option.
Specify Home Details	Enter the installation home path.
Verify Installation Prerequisites	Verify if all of the prerequisites are met before proceeding.
Select the Oracle Home Configuration	Specify the Oracle client home path.
Select the Oracle	Specify the Oracle Data Integrator home location.
Data Integrator Home Location	The Oracle Data Integrator home should be one level above the / oracle_common directory. For example: /u01/app/oracle/Oracle_ODI1.
Select Database Server for Oracle	Select one of the following options for the Oracle Data Integrator repository schemas:
Data Integrator Repository Schemas	 If the Oracle Data Integrator repository database server is on the installation server, select the Installation database server option. Else, select the Remote database server option.
Specify Mount Path	Enter the configuration details for the mounted remote server directory:
Details (applicable only for remote	 Mounted directory path on the remote server
installations)	Mount path on the installation server To obtain the qualitable stargers drives on the Linux repolition assessed the different particular and the different
	To obtain the available storage drives, on the Linux machine, execute the df -h command. If the remote server directory is mounted on the installation server, the mounting is displayed as follows:
	Remote Server name: Remove server path
	total size used up space Available space use% Path in installation server where mounting was done
	For example:
	abc:/scratch/dump 191G 138G 44G 76% / installation server
	Note: If the remote server mounted path is displayed as <i>I</i> , provide the absolute mounted path of the remote server.



-	Screen	Action
	Specify Healthcare Data Model Database Instance Details	 Enter values for the following fields: Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port number Service name System user password Select this database instance for repository schema creation If you select Yes, the installer uses the same Data Model database instance for Oracle Data Integrator repository schema creation.
	Specify Oracle Data Integrator Repository Database Instance Details (applicable only if you selected No in the previous screen for Select this database instance for repository schema creation)	 Enter values for the following fields: Host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Port Service name System user password
	Specify Oracle Data Integrator Supervisor Password	Specify the supervisor password used for the Oracle Data Integrator console login.
	Select Terminology Loaders Source Location	Specify the Terminology loaders source file location. This location is used to read the terminology loaders source data files. You can change this location when required. The installer creates an archive directory at the same level as the source directory. Make sure that the create directory privileges exist for the installation user.
	Specify Healthcare Data Model Schema Details	 Enter values for the pre-created schemas: Interface table schema name Interface table schema password Data warehouse schema name Data warehouse schema password Common data mart (hcd) schema name Common data mart (hcd) schema password Cohort data mart (cdm) schema name Cohort data mart (cdm) schema password
	Specify Healthcare Data Model Schema Details	Enter values for the pre-created schemas: • Enterprise schema name • Enterprise schema password.
	Specify Terminology Loader Details	 Enter values for the following fields: Master repository schema name Master repository schema password Work repository schema name Work repository schema password Specify the new schema names for the Master and Work repositories. The installer creates the Master and Work repository schemas, and imports loaders into them.



-	Screen	Action
	Specify Warehouse Integration Loader Details	Enter values for the following fields: Configuration schema name
	Details	 Configuration schema password Master repository schema name Master repository schema password Work repository schema name Work repository schema password Enter the existing Configuration schema name to upgrade it. Specify the new schema names for the Master and Work repositories. The installer creates the Master and Work repository schemas, and imports loaders into them.
	Specify Healthcare Common Data Mart Loader Details	 Enter values for the following fields: Configuration schema name Configuration schema password Master repository schema name Master repository schema password Work repository schema name Work repository schema password Enter the existing Configuration schema name to upgrade it. Specify the new schema names for the Master and Work repositories. The installer creates the Master and Work repository schemas, and imports loaders into them.
	Specify Healthcare Cohort Data Mart Loader Details	 Enter values for the following fields: Master repository schema name Master repository schema password Work repository schema name Work repository schema password Specify the new schema names for the Master and Work repositories. The installer creates the Master and Work repository schemas, and imports loaders into them. The configuration schema is not required for CDM.
	Specify RCU Prefix and Password	Specify an RCU Prefix to be prepended to the schemas created by the Oracle Data Integrator Repository Creation utility (RCU). The RCU creates 3 schemas: • RCU Prefix_STB • RCU Prefix_WLS • RCU Prefix_WLS_RUNTIME Note: The RCU Prefix must be unique. The prefix should be alphabetic only. It cannot have special characters and cannot start with a number. The length of the prefix must not exceed 8 characters. Specify a password for RCU schemas created using the Oracle Data Integrator Repository. Note: The password must be between 8 and 12 alphanumeric characters long and must include at least one number. The password cannot start with a number.
	Specify the Tablespace Details	Specify the tablespace names for the configuration schemas. The installer creates these tablespaces if they do not exist. Configuration schema default tablespace name Configuration schema temporary tablespace name



	- Screen	Action
	Specify the Tablespace Details	Specify the tablespace names for the repository schemas: wil_odi_ts - Default tablespace for Oracle Data Integrator temporary objects for Warehouse Integration Loaders hcd_odi_ts - Default tablespace for Oracle Data Integrator temporary objects for Healthcare Common Data mart Loaders cdm_odi_ts - Default tablespace for Oracle Data Integrator temporary objects for Cohort Data mart Loaders tl_odi_ts - Default tablespace for Oracle Data Integrator temporary objects for Terminology Loaders
	Specify Tablespace for Creation of Oracle Data Integrator Temporary Objects	Specify tablespace names for the creation of temporary objects used by the Oracle Data Integrator Loaders. The installer creates the following tablespaces if they do not exist: • Warehouse Integration Loaders • Healthcare Common Datamart loaders • Cohort Datamart loaders • Terminology loaders Oracle recommends that you provide different tablespace names for each component.
	Specify Tablespace Location for Configuration Schemas	Specify the tablespace location for the configuration schemas. The location should be present in the data model database server with write privileges. If the Oracle Healthcare Foundation data model database is not on the installation server, you must enter the location manually.
	Specify Tablespace Location for Repository Schemas	Specify the tablespace location for the Oracle Data Integrator repository schema. The location should be present in the repository database server with write privileges. If the repository database is not on the installation server, you must enter the location manually.
	Verify Configuration Parameters	Click Next.
	Summary	Click Install.
	End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.
Check the	Installation an	d Delete E\$_tables
•	- Steps	
	Review the generated	installation log files for errors. For details, see Installation Log Files.
	Contact Oracle suppor	t, if necessary, to resolve any errors.
	Delete all E\$_ tables u	nder the HCD schema.

Create a New Oracle Data Integrator Repository Login

Perform the following steps to create a new Oracle Data Integrator repository login:

- Steps			
Navigate to ODI > File > New > Create a New ODI Repository Login.			
Click OK . The Repository Connection Information screen is displayed.			
 Login Name - For example, WIL_REPOSITORY_LOGIN User - SUPERVISOR Password - Provide the Oracle Data Integrator Login password entered during installation (see Run the Installer) User - <database created="" for="" master="" repository="" schema="" the=""></database> Password - <database created="" for="" master="" password="" repository="" schema="" the=""></database> Driver List - Select OracleJDBC Driver from the drop-down list Driver Name - oracle.jdbc.oracledriver Url - Set appropriate values based on your database details Work Repository - Select the Work Repository option, browse to select the work repository shown (for example, for the Warehouse Integration loader, select WIL_WORK_REPOSITORY), and click OK. 			
Click OK . The login name is created with the name specified in the previous step.			
Navigate to ODI > Connect > ODI Studio .			
 Enter the following details: Login Name - Select WIL_REPOSITORY_LOGIN User - Supervisor Password - Provide the Oracle Data Integrator login password entered during installation (see Run the Installer). 			

Similarly, follow the above steps to create the login for the Terminology loaders, Common Data Mart loader, and Cohort Data Mart loader.



Data Management Assembly for Informatica Upgrade

For a list of the supported upgrade paths, see Supported Upgrade Paths.

To upgrade the Oracle Healthcare Foundation Data Management Assembly for Informatica, follow the instructions below:

- Check Prerequisites
- Prepare the Installer
- Run the Installer
- Check the Installation

Check Prerequisites

•	iteps		
	he user is familiar with Oracle Database (DB), Informatica, and Linux OS.		
	he Oracle Healthcare Foundation Data Model is installed.		
	follow the instructions in Data Model Installation or Data Model Upgrade.		
	Make sure that the database compatible parameter is set to 19.3.0.0.0 by connecting to the DBA user and running the query below:		
	<pre>elect * from v\$parameter where name = 'compatible';</pre>		
	the parameter is not set to 19.3.0.0.0, ask your database administrator to set it.		
	se sure to backup all custom database objects and custom ETL objects before initiating the Dracle Healthcare Foundation upgrade. Import the custom database objects and custom ETLs into the upgraded environment.		
	Oracle Healthcare Foundation uses separate HMC schemas for the WIL and HCD loaders. If you have a common HMC schema for OHADI (WIL) and HCD, designate different HMC schemas for WIL (the existing HMC) and HCD (the new HMC_HCD) by performing the followi steps:		
	. Create a new HMC schema for HCD loaders. For example: HMC_HCD.		
	Provide the newly created HMC_HCD schema with the same privileges as the existing HMC schema.		
	. Move the HCD* tables from the existing HMC schema to the new HMC_HCD schema and remove them from the existing HMC schema.		
	he Informatica domain is running and no user is connected to the Informatica Admin Console.		
	Informatica services can connect to the Data Model 8.2.5 database mentioned in the Oracle INS file (TNS entries of the required database must be available in the installation server insnames.ora file).		

-	Steps
	You can connect the database using EZCONNECT syntax. For example, sqlplus user/password@hostname:port/service name.
	The password expiry notification message does not display for the system user or the existing schemas.
	The installer is run on the system where the Informatica server is installed.
	The terminology loaders source file location exists. The installer creates an archive directory. For example,
	/scratch/home/oemora/TL_Source is the source file location specified during installation, which already exists.
	$/ \verb scratch/home/oemora/TL_Archive_Files is created by the installer as the archive directory.$
	The path of the data file (Configuration schema/Repository schema tablespace) mentioned when creating the tablespace is correct. Make sure that the database user has write privileges.
	Enough space is available in the installation directory and the Oracle Home directory.
	The Sqlplus utility is available on the installation server.
	The impdp utility is available on the repository database server.
	The installation user has read, write, and execute privileges to the \$INFA_HOME/server folder. The installer creates product-specific folders and parameter files under this location.
	For remote installations, where the installation server and the Informatica Repository Database are on different machines, make sure that:
	• The remote database server directory is mounted to the installation server with appropriate read and write privileges.
	The remote directories are accessible after mounting from the installation server.
	 The Linux user of the remote server, who executes the Oracle process, has privilege 755 for the directory (datapump).
	The Oracle user has privileges for the mount path directory.
	• If the repository DB is on an Exadata machine, the repository DB single node (the node which is mounted) TNSENTRY should be added to the tnsnames.ora file on the installation server. After installation, revert TNSENTRY to the original entry.
	 Informatica app machine should contain Oracle client. If it does not have the client, install Oracle Instant Client. Refer to the Troubleshooting section for Install and Configure Oracle Instant Client.
	GLOBAL_NAMES database initialization parameter is set to false.
	Back up the following csv files under \$INFORMATICA_HOME/server/infa_shared/SrcFiles if it exists:
	• bus_susp_day.csv
	• daylght_svngs_day.csv
	• hosp_hol_day.csv
	• time_am.csv
	• time pm.csv



-	Steps				
	If the Terminology Loaders source folder is shared, make a backup of the following files:				
	• Code Axes.txt				
	• Code Descriptions.txt				
	• Code Hierarchy.txt				
	• Code.txt				
	• Related Entity.txt				
	• Relations Type.txt				
	• Relations.txt				
	• Relationship Type.txt				
	• time.txt				
	The installer will overwrite any existing files from the list above.				
	If any previous ETLs are in the failed status, make sure that they execute successfully before upgrading.				
	Make sure that the data models are upgraded to Oracle Healthcare Foundation 8.2.5.				
	The OUI displays default configuration schema (hmc) names. You must change these schema names to the existing hmc schema names.				
	The installer upgrades the configuration schemas to Oracle Healthcare Foundation 8.2.5.				
	Back up the existing hmc schemas.				
	eps				

Prepare th

-	Steps
	Extract the contents of the Oracle Healthcare Foundation media pack to your system.
	Navigate to the <i>media_pack_locationl</i> folder.
	Unzip the p37792720_82500_Generic.zip file where you want to launch the installer using the following command:
	unzip -a p37792720_82500_Generic.zip
	Navigate to the Disk1/install folder.
	Change the protection on the files as follows: chmod 755 *

Run the Installer

Start the Oracle Universal Installer by running the following command:

If the Informatica repository schemas to be created are on the database instance of the installation server, execute:

```
sh runInstaller.sh -local
```


If the Informatica repository database or Oracle Healthcare Foundation data model database is on the database instance of another server, execute:

```
sh runInstaller.sh -local remote installation=true
```



where, the <code>-local</code> option is to install on the local node irrespective of the cluster nodes specified on the installer machine.

- Screen	Action		
Welcome	Click Next.		
Select a Product to Install	Select the Oracle Healthcare Foundation Data Management Assembly for Informatica 8.2.5.0.0 option.		
Select the Informatica Home Location	Enter or select the installation home path.		
Verify Installation Prerequisites	Verify if all the prerequisites are met before proceeding.		
Oracle Home Configuration	Specify the Oracle client home path.		
Select the Informatica Home Location	Specify the Informatica home location. The Informatica home should be one level above the <i>Iserver</i> directory. For example, <i>path</i> /Informatica/961/.		
Specify the Information Shared Path location	The Informatica Shared Path should be one level above the SrcFiles folder. For example, path/Informatica/961/server/infa_shared.		
	Note:		
	Before installation ensure that all required subfolders are created under infa_shared folder.		
	For example: SrcFiles, TgtFiles,		



Select one of the following options for the Informatica repository schemas:

SessLogs, WorkflowLogs, and so forth.

- If the Informatica repository database server is on the installation server, select the Installation database server option, and skip the next step.
- For remote installations, select the **Remote database server** option, and **go to the next step**.



Screen Action Specify Mount Path Enter the following mounted directory configuration details in which the Details (applicable remote server directory is mounted: only for remote Mount path in the repository database server - Remote server path installations) Mount path in the installation server - Path on the installation server where the mounting is performed To obtain the available storage drives, on the Linux machine, execute the df -h command. If the remote server directory is mounted on the installation server, the mounting is displayed as follows: Remote Server name: Remote server path total size used up space Available space use% Path in installation server where mounting was done For example, abc:/scratch/dump 191G 138G 44G 76% /installation server Note: The (datapump) directory of the remote database server should be mounted to the installation server with appropriate read and write privileges for the IMPDB utility (folder with dba group). Make sure that the remote directories are accessible after mounting from the installation server. If the remote server mounted path is displayed as I, provide the absolute mounted path of the remote server. The remote server Linux user that executes the Oracle process must have minimum privileges of 755 to the directory. Specify Healthcare Enter values for the following fields: Data Model Database Host name - By default, the system host name appears. For remote Instance Details installations, set this value to the host name of the remote machine. Port number Service name System user password Select this database instance for repository schema creation If you select Yes, the installer uses the same Data Model database instance for Informatica repository schema creation. Specify Informatica Enter values for the following fields: Repository Database Host name - By default, the system host name appears. For remote Instance Details installations, set this value to the host name of the remote machine. (applicable only if you Port selected No in the Service name previous screen for System user password Select this database instance for repository schema creation) Select Terminology Specify the Terminology loaders source file location. Loaders Source This location is used to read the terminology loaders source data files. You Location can change this location when required. The installer creates an archive directory at the same level as the source directory. Make sure that the create directory privileges exist for the installation user.

- Screen	Action
Specify Healthcare Data Model Schema	Enter values for the following fields:
Details	Interface table schema name
2 0100	Interface table schema password
	Data warehouse schema name
	Data warehouse schema password
	 Common data mart (hcd) schema name Common data mart (hcd) schema password
	Cohort data mart (cdm) schema name
	Cohort data mart (cdm) schema password
Specify Healthcare	Enter values for the following fields:
Data Model Schema	Enterprise schema name
Details	Enterprise schema password.
Specify Warehouse	Enter values for the following fields:
Integration Loader	Configuration schema name
Details	Configuration schema password
	Repository name
	Repository schema name
	Repository schema password
	Provide an existing HMC schema.
	Provide the new Repository schema name.
Specify Healthcare	Enter values for the following fields:
Common Data Mart Loader Details	Configuration schema name
Loader Details	Configuration schema password
	Repository name
	Repository schema name
	Repository schema password Specify on existing LIMC schema
	Specify an existing HMC schema. Provide the new Repository schema name.
Specify Healthcare Cohort Data Mart Loader Details	If you are upgrading the Informatica repository schemas from Enterprise Healthcare Analytics (EHA) 6.1 and Oracle Healthcare Foundation 7.0.1 to Oracle Healthcare Foundation 8.2.5, the repository name, tablespace, and temp space name should be the same as in the previous version.
	Enter values for the following fields:
	Repository name
	Repository schema name
	Repository schema password
	Provide the new Repository schema name.
	The configuration schema is not required for CDM.
Specify Tablespace Details (if prompted)	Specify the tablespace names for the configuration schemas. The installer creates these tablespaces if they do not exist.
	 Configuration schema default tablespace name
	Configuration schema temporary tablespace name
Specify Tablespace Details (if prompted)	Specify the tablespace names for repository schemas. The installer creates these tablespaces if they do not exist in the database.
	 Repository schema default tablespace name
	 Repository schema temporary tablespace name



	-	Screen	Action
		Specify Tablespace Location for Configuration Schema	Specify the tablespace location for the Configuration schema. The location should be present in the Oracle Healthcare Foundation data model database server with write privileges.
		(if prompted)	If the Oracle Healthcare Foundation data model database is not on the installation server, you must enter the location manually.
	П	Specify Tablespace	Specify the tablespace location for the repository schemas.
		Location for Repository Schema (if prompted)	When the repository database is not on the installation server, you must enter the location manually.
			The location should be present on the repository database server with write privileges.
		Specify Informatica Domain Details	 Specify the following parameters: Domain name Domain code page ID Node name License name Informatica host name Informatica port number Informatica administrator user name Informatica administrator password Contact your Informatica Administrator for the Domain Code Page ID and provide a valid Code Page ID. Make sure that the code page is compatible with the domain code page for creating the Integration Service. For a domain compatible code page, see any existing and active integration service code pages from the Informatica admin console. A list of sample code pages and their IDs are as follows: US-ASCII (ID 1) - 7-bit ASCII Latin1 (ID 4) - ISO 8859-1 Western European JapanEUC (ID 18) - Japanese Extended Unix Code (including JIS X
			 0212) UTF-8 (ID 106) - Unicode Transformation Format, multibyte MS932 (ID 2024) - MS Windows Japanese, Shift-JIS
			MS1252 (ID 2252) - MS Windows Latin1 (ANSI), superset of Latin1
		Verify Configuration Parameters	Click Next.
		Summary	Click Install.
		End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.
Check the	Ir	stallation	
	-	Steps	
		Review the generated i	nstallation log files for errors. For details, see Installation Log Files.
		Contact Oracle support	r, if necessary, to resolve any errors.

Middle-Tier Upgrade on the Primary Node

For a list of the supported upgrade paths, see Supported Upgrade Paths.

You must run the installer on the Primary node only, WebLogic will propagate applications updates to secondary nodes on clusters. It is not required to run the Installer on secondary node.

To upgrade the Oracle Healthcare Foundation Middle-Tier, follow the instructions below:

- Check Prerequisites
- Prepare the Installer
- Run the Installer
- · Check the Installation

Check Prerequisites

	- Steps
	Oracle Fusion Middleware Infrastructure is installed on the machine (see Software Requirements).
	The oh_domain Oracle WebLogic Server domain is present on the Oracle WebLogic Server machine.
	All of the Oracle Healthcare Foundation Data Model schemas exist.
	The Oracle external table DIRECTORY object is created for Omics Data Bank.
	Ensure all servers and node managers on primary and secondary nodes.
Prepare th	ne Installer
	- Steps
	Extract the contents of the Oracle Healthcare Foundation media pack to your system
	Open the <i>media_pack_locationl</i> folder.
	Unzip the p37792720_82500_Generic.zip file where you want to launch the installer using the following command:
	unzip -a p37792720_82500_Generic.zip
	Open the Disk1/install folder
	Change the protection on the files as follows: chmod 755 *



Run the Installer

Start the Oracle Universal Installer (OUI) using the following command:

./runInstaller.sh

- Screen	Action		
Welcome	Click Next.		
Select a Product to Install	Select the Oracle Healthcare Foundation Middle Tier 8.2.5.0.0 option.		
Specify Home Details	Enter the Middle Tier home name and location.		
Choose Install Type	Select No to perform an upgrade.		
Verify Upgrade Prerequisites	Verify if all of the prerequisites are met before proceeding.		
Oracle Fusion Middleware Home	Specify the WebLogic with ADF installation path. The installer validates this path.		
AdminServer Configuration	 Enter values for the following fields: Listen address Listen port SSL listen port User name - Oracle WebLogic Server administrator use Password - Oracle WebLogic Server administrator password 		
NodeManager Configuration	 Enter values for the following fields: Listen address Listen port User name - Node manager administrator use Password - Node manager administrator password 		
Oracle Healthcare Foundation Data Model Configuration - part 1	 Enter values for the following fields: Database host name - By default, the system host name appears. For remote installations, set this value to the host name of the remote machine. Database port Service name 		
Oracle Healthcare Foundation Data Model Configuration - part 2	Enter values for the following fields: Omics Data Bank schema name Omics Data Bank schema password Services schema name Services schema password HDM schema name HDM schema password Enterprise schema name Enterprise schema password		
Oracle Healthcare Foundation Data Model Configuration - part 3	Enter values for the following fields: Cohort Data Mart (CDM) schema name Cohort Data Mart (CDM) schema password Clinical Genomics (cga) schema name Clinical Genomics (cga) schema password Click Install.		



- Screen	Action
End of Installation	Click Exit after reviewing the installation information. At the confirmation prompt, click Yes to exit the installer.

Check the Installation

- Steps
Check the log file located in ORACLE_BASE/oraInventory/logs.
Review the generated installation files for errors. For details, see Middle-Tier Troubleshooting .
Contact Oracle support, if necessary, to resolve any errors.



15

Upgrade for ADW

This chapter provides information on the following:

- Data Model Upgrade on ADW
- Data Management Assembly for OCI Marketplace Oracle Data Integrator Upgrade

Data Model Upgrade on ADW

To upgrade the data model on ADW, see the instructions in Data Model Installation on ADW.

Data Management Assembly for OCI Marketplace Oracle Data Integrator Upgrade

To upgrade the data management assembly, following the instructions in Data Management Assembly for OCI Marketplace Oracle Data Integrator Installation and do the following:

 Update the OHFCREDNAME user parameter to a unique name for the upgrade in the <OHF_INSTALL_HOME>/dma_odi_master_install_adw/ODI_SETENV_CREATE.ksh script



Part III

Uninstall

Chapters in this part:

- Data Model Uninstall
- Data Management Assembly for Oracle Data Integrator Uninstall
- Data Management Assembly for Informatica Uninstall
- Middle-Tier Uninstall



16

Data Model Uninstall

This chapter describes how to uninstall the Oracle Healthcare Foundation Data Model.



Oracle recommends that you uninstall the Data Model only from the development environment. Also, make sure you have backups of the user schemas before dropping them.

Execute the following commands to drop user schemas by connecting to the system user. Replace the user schema names and tablespace names with the values provided during the installation.

```
drop user <hdi> cascade;
drop user <hdm> cascade;
drop user <hcd> cascade;
drop user <odb> cascade;
drop user <cdm> cascade;
drop user <ent> cascade;
drop user <job> cascade;
drop user <svc> cascade;
drop tablespace <hdi temp> INCLUDING CONTENTS and datafiles;
drop tablespace <hdm temp> INCLUDING CONTENTS and datafiles;
drop tablespace <hcd temp> INCLUDING CONTENTS and datafiles;
drop tablespace <odb temp> INCLUDING CONTENTS and datafiles;
drop tablespace <cdm temp> INCLUDING CONTENTS and datafiles;
drop tablespace <ent temp> INCLUDING CONTENTS and datafiles;
drop tablespace <job temp> INCLUDING CONTENTS and datafiles;
drop tablespace <svc temp> INCLUDING CONTENTS and datafiles;
drop tablespace <hdi ts> INCLUDING CONTENTS and datafiles;
drop tablespace <hdm ts> INCLUDING CONTENTS and datafiles;
drop tablespace <hcd ts> INCLUDING CONTENTS and datafiles;
drop tablespace <odb data ts> INCLUDING CONTENTS and datafiles;
drop tablespace <odb index ts> INCLUDING CONTENTS and datafiles;
drop tablespace <odb lob ts> INCLUDING CONTENTS and datafiles;
drop tablespace <cdm data ts> INCLUDING CONTENTS and datafiles;
drop tablespace <cdm index ts> INCLUDING CONTENTS and datafiles;
drop tablespace <ent ts> INCLUDING CONTENTS and datafiles;
drop tablespace <job data ts> INCLUDING CONTENTS and datafiles;
drop tablespace <job index ts> INCLUDING CONTENTS and datafiles;
drop tablespace <job store ts> INCLUDING CONTENTS and datafiles;
drop tablespace <job_lob_ts> INCLUDING CONTENTS and datafiles;
drop tablespace <job_tbs_ts> INCLUDING CONTENTS and datafiles;
drop tablespace <svc ts> INCLUDING CONTENTS and datafiles;
```

17

Data Management Assembly for Oracle Data Integrator Uninstall



This section is applicable only to uninstall the Data Management Assembly only from the development environment.

- Steps

Execute the following commands to drop user schemas by connecting to the system user. If you have installed the Data Model Assembly, replace the user schema name and tablespace names with the values provided during the installation.

```
drop user <HCD WORK REP 80> cascade;
drop user <HCD MASTER REP 80> cascade;
drop user <WIL WORK REP 80> cascade;
drop user <TL MASTER REP 80> cascade;
drop user <CDM WORK REP 80 cascade;
drop user <TL WORK REP 80> cascade;
drop user <WIL MASTER REP 80> cascade;
drop user <CDM MASTER REP 80> cascade;
drop user <WIL HMC80> cascade;
drop user <HCD HMC80> cascade;
drop tablespace <hmc_temp80> INCLUDING CONTENTS and datafiles;
drop tablespace <odirep_temp80> INCLUDING CONTENTS and datafiles;
drop tablespace <odirep ts80> INCLUDING CONTENTS and datafiles;
drop tablespace <hmc ts80> INCLUDING CONTENTS and datafiles;
drop tablespace <wil odi ts> INCLUDING CONTENTS and datafiles;
drop tablespace <hcd odi ts> INCLUDING CONTENTS and datafiles;
drop tablespace <cdm odi ts> INCLUDING CONTENTS and datafiles;
drop tablespace <tl odi ts> INCLUDING CONTENTS and datafiles;
commit;
```



- Steps

Drop the RCU repository:

1. Start the RCU from the terminal:

```
cd WLS_HOME/oracle_common/bin/
   ./rcu
```

- 2. In the Welcome screen, click Next.
- 3. Select **Drop Repository** and click **Next**.
- 4. Fill in the following values:
 - Database Type: eg. Oracle Database
 - Host Name: Host where the database is running
 - Port: Oracle Database service listener port
 - Service Name: Oracle Database service name
 - User Name: User name with SYSDBA privilege
 - Password: Password for the above sysdba user
 - Role: SYSDBA

Click Next.

- 5. Choose the existing RCU prefix created during the Oracle Data Integrator Data Assembly Installation to drop and select all the components in the bottom table and click **Next**.
- 6. Click **Drop** to drop all of the schemas with the selected prefix.
- 7. After the drop is completed, click **Finish**.
- Navigate to the Oracle Data Integrator domains directory and drop all the Oracle Healthcare Foundation domain folders created during the Oracle Healthcare Foundation installation. For example:

```
cd $ODI_HOME/user_projects/domains
rm -rf ${RCU_PREFIX}_WIL_domain_01
rm -rf ${RCU_PREFIX}_AT_domain_01
rm -rf ${RCU_PREFIX}_CDM_domain_01
rm -rf ${RCU_PREFIX}_TL domain_01
```



Data Management Assembly for Informatica Uninstall

Note:

This section is applicable only to uninstall the Data Management Assembly only from the development environment.

Steps

Execute the following commands to drop user schemas by connecting to the system user.

```
drop user <WIL_HMC_USR> cascade;
drop user <WIL_INFA_REP_DB_USER> cascade;
drop user <AT_HMC_USR> cascade;
drop user <AT_INFA_REP_DB_USER> cascade;
drop user <CDM_INFA_REP_DB_USER> cascade;
drop user <CDM_INFA_REP_DB_USER> cascade;
drop tablespace <INFA_REP_TBSP> INCLUDING CONTENTS and datafiles;
drop tablespace <INFA_REP_TMP_TBSP> INCLUDING CONTENTS and datafiles;
drop tablespace <HMC_SCHEMA_TBSP> INCLUDING CONTENTS and datafiles;
drop tablespace <HMC_SCHEMA_TMP_TBSP> INCLUDING CONTENTS and datafiles;
```

Log in to the Informatica Admin console and delete the following repositories and integration services:

- Repositories
 - WIL_REP_NAME
 - AT_REP_NAME
 - CDM_REP_NAME
- Integration Services
 - WIL_INT_SRVC
 - AT_INT_SRVC
 - CDM_INT_SRVC

Note:

Ensure that there are no db (.dbf files) files in INSTALL_HOME. If they exist, do not execute the following command:


```
rm -r INSTAL_HOME
```

Contact the Database Administrator for guidance.

 Back up any user-specific files (apart from installer default files) in the installation directory.



Middle-Tier Uninstall

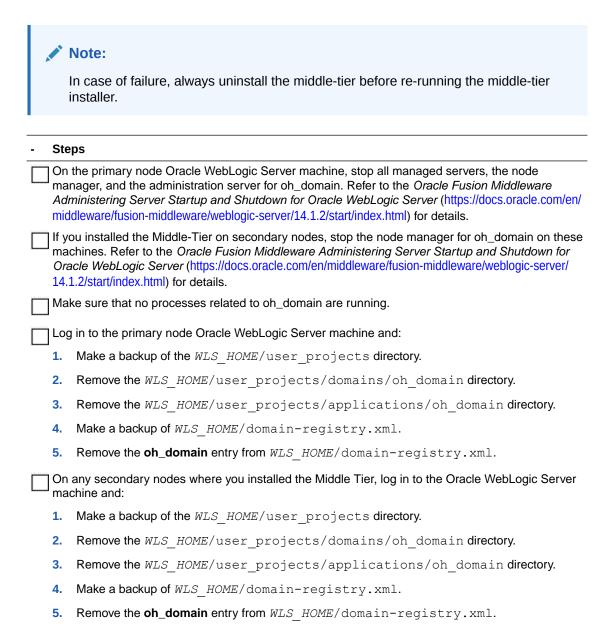

Remove the WLS HOME/user projects/templates directory.

- Steps

Drop the RCU repository:

1. Start the RCU from the terminal:

cd WLS_HOME/oracle_common/bin
./rcu

- 2. In the Welcome screen, click Next.
- 3. Select **Drop Repository** and click **Next**.
- **4.** Fill in the following values:
 - Database Type: eg. Oracle Database
 - Host Name: Host where the database is running
 - Port: Oracle Database service listener port
 - Service Name: Oracle Database service name
 - User Name: User name with SYSDBA privilege
 - Password: Password for the above sysdba user
 - Role: SYSDBA

Click Next.

- Choose Select existing prefix for your drop and select all of the components in the bottom table. Click Next.
- 6. Click **Drop** to drop all the schemas with the selected prefix.
- 7. After the drop is completed, click **Finish**.



Part IV

Troubleshooting

Chapters in this part:

- Data Model Troubleshooting
- Data Management Assembly for Oracle Data Integrator Troubleshooting
- Data Management Assembly for Informatica Troubleshooting
- Middle-Tier Troubleshooting
- Upgrade failed with "Bad version number in .class file occurred"
 Revise paths to resolve "bad version number" upgrade errors.
- Troubleshooting the JAVA_HOME Error
- Install and Configure Oracle Instant Client
 In the case of remote installation and when there is no Oracle database or client on the
 ODI app server, you should install Oracle Instant Client.

Upgrade failed with "Bad version number in .class file occurred"

Revise paths to resolve "bad version number" upgrade errors.

When attempting to install the Data Model, the following error occurs:

```
Exception java.lang.UnsupportedClassVersionError: Bad version number in .class file occurred. java.lang.UnsupportedClassVersionError: Bad version number in .class file at java.lang.ClassLoader.defineClass1(Native Method)
```

To address this error:

- 1. Source the environment with the path to the Java Development Kit (JDK) 1.8 location.
- 2. Use a new Data Model Home instead of the old 8.0.x "Data Model Home" folder.
- 3. Create a new Home for "Data Management Assembly" and "Middle-Tier" Upgrade as well.

Troubleshooting the JAVA_HOME Error

The OHF installer gives an error indicating that the jdk is not accessible if JDK updates are applied after the Oracle Fusion Middleware applications are installed.

To address this error:

1. For information on working around this error, see: https://docs.oracle.com/en/middleware/fusion-middleware/14.1.2.0.0/infup/shared-updating-jdk-installing-and-configuring-oracle-fusion-middleware-product.html#GUID-4230A928-7BE8-4D23-B8F9-1CB2D4EDEC33



If the OHF installer is not launching due to a JDK not found error, then run OHF installer with this command:

```
./runInstaller.sh -jreLoc <jdk_path> <use remaining parameters as per the install documentation>
```

Install and Configure Oracle Instant Client

In the case of remote installation and when there is no Oracle database or client on the ODI app server, you should install Oracle Instant Client.

1. Navigate to Oracle Instant Client:

https://www.oracle.com/database/technologies/instant-client/linux-x86-64-downloads.html

Scroll to "Version 19.19.0.0.0 (Requires glibc 2.14) - for OL9/RH9 only" (for LINUX 9 version).

You need 3 files: Basic Package, SQL*Plus Package, and Tools Package (either zip or rpm).

3. Move to the Instant Client installation path:

```
cd <Instant client installation path>/instantclient_19_19/
mkdir network
chmod 755 network
```

4. Navigate to the network directory and create admin directory:

```
cd network
mkdir admin
chmod 755 admin
```


- 5. Navigate to admin directory and place the tnsnames.ora file here from the database server.
- 6. Navigate back to instantclient_19_19 and create a bin directory.

```
cd .. / ..
cd <Instant client installation path>/instantclient_19_19/
mkdir bin
cd bin
ln -s ../sqlplus .
ln -s ../impdp .
ln -s ../sqlldr .
```

The last 3 commands create shortcuts to the respective app (as shown below).



Figure 1 Oracle Instant Client shortcuts



7. Create a set_env_19_9.sh script with following content:

```
export ORACLE_BASE=<Instant client installation path>/instantclient_19_19
export ORACLE_HOME=<Instant client installation path>/instantclient_19_19
export LD_LIBRARY_PATH=$LD_LIBRARY_PATH:$ORACLE_HOME
export JAVA_HOME=<JDK installation path>/jdk1.8.0_391
export PATH=$PATH:$ORACLE_HOME:$JAVA_HOME/bin
```

This script should be sourced/executed before running the OHF installer. After the steps above are complete, start the OHF824 DMA installation.



20

Data Model Troubleshooting

Review the following:

Installation Log Files

Installation Log Files

While installing the Data Model, the installer generates the following log files:

Table 20-1 Installation Log Files

File Name	Description
installActions <i>timestamp</i> .log	Records the actions of the installer and can be used to diagnose issues with the installer.
oralnstall <i>timestamp</i> .out	Records the output of the SQL scripts run by the installer. Oracle Database objects are installed using the Python framework.
oralnstall <i>timestamp</i> .err	Records the errors from the SQL scripts run by the installer.
	You can ignore the following error:
	<pre>java.io.FileNotFoundException: /INSTALL_HOME/ inventory/Components21/ oracle.hsgbu.hc.datamodel/8.2.5.0.0/context.xml</pre>
	The log files are time stamped and each installation session creates a new log file.
	On a Linux machine, the log files are located at \$ORACLE_BASE/oraInventory/logs. For example, /u01/app/oraInventory/logs.
INSTALL_HOME/dm/install.err	Contains any SQL errors. Oracle Database objects are installed using the Python framework and the error logging is redirected to this location.
INSTALL_HOME/reports/ dm_install <timestamp>.html</timestamp>	Contains the installation summary for the Data Model installation.

If the installation fails, check the log files for errors. You must fix the issues and rerun the installer from the installation home location.

While reporting any problems that occur during installation, make sure that you include all the above log files. Check which components were installed successfully using the following query by connecting to the enterprise schema:

Select * from W EHA PRODUCT VERSION

Send the result of the query when reporting any problems to Oracle support.

Data Management Assembly for Oracle Data Integrator Troubleshooting

Review the following:

- Installation Log Files
- Troubleshooting Timezone Errors
- Troubleshooting Guidelines

Installation Log Files

While installing the Data Management Assembly, the installer generates the following log files. When the installer is running the python script, the execution log is redirected to the below log files:

Table 21-1 Installation Log Files

File Name	Description
installActions <i>timestamp</i> .log	Records the action of the installer and can be used to diagnose issues with the installer.
oralnstall <i>timestamp</i> .out	Records the output of SQL scripts run by the installer.
oralnstall <i>timestamp</i> .err	Records the errors from the SQL scripts run by the installer.
	The log files are time stamped and each installation session creates a new log file.
	On a Linux machine, the log files are located at \$ORACLE_BASE/oraInventory/logs.
	For example, /u01/app/oraInventory/logs.

When the installer runs the ksh script, the execution log is redirected to the below log files:

- INSTALL_HOME/dma_odi_master_install/dmalogs/tmplogs/ script_name.error = Contains an error file if the script is not executed successfully.
- INSTALL_HOME/dma_odi_master_install/dmalogs/dma_etl_install.log =
 Contains a consolidated log file that is archived to INSTALL_HOMEI
 dma_odi_master_install/dmalogs/tmplogs/ with the time stamp for next execution of the installer. In case of restart, logs are appended to the existing dma_etl_install.log file.
- INSTALL_HOME/dma_odi_master_install/dmalogs/tmplogs/ script name.done = Indicates that the script is executed successfully.

The installer generates the following report:

• INSTALL_HOME/reports/dma_odi_installtime_stamp.html = Contains the installation summary of the Data Management Assembly for Oracle Data Integrator installation.

Troubleshooting Timezone Errors

If you encounter the following error during installation:ORA-39367: Statistics are being skipped. Cannot locate the time zone version 26 file. Refer to the workaround mentioned on My Oracle Support (MOS):

https://support.oracle.com/epmos/faces/DocumentDisplay?id=1614247.1

Troubleshooting Guidelines

- The OUI installer does not fix any issues automatically. If the installation fails, you must verify and fix the issues before restarting the installer.
- You must provide unique repository schema names. The installer imports the ETL
 metadata into these schemas. However, upon restarting the installer for any failures, you
 must specify the same values that were entered for the previous execution.
- When reporting any problems that occur during installation, make sure that you include all
 the above log files. Check which components were installed successfully using the
 following query by connecting to the enterprise schema:

```
Select * from W EHA PRODUCT VERSION
```

Send the result of the query when reporting any problems to Oracle support.



Data Management Assembly for Informatica Troubleshooting

Review the following:

- Installation Log Files
- Troubleshooting Timezone Errors
- Troubleshooting Guidelines
- Troubleshooting
- ETL Performance Troubleshooting

Installation Log Files

While installing Data Management Assembly, the installer generates the following log files. When the installer is running the python script, the execution log is redirected to the below log files:

Table 22-1 Installation Log Files

File Name	Description
installActions <i>timestamp</i> .log	Records the action of the installer and can be used to diagnose issues with the installer.
oralnstall timestamp.out	Records the output of SQL scripts run by the installer.
oralnstall <i>timestamp</i> .err	Records the errors from the SQL scripts run by the installer.
	The log files are time stamped and each installation session creates a new log file.
	On a Linux machine, the log files are located at \$ORACLE_BASE/oraInventory/logs.
	For example, /u01/app/oraInventory/logs.

When the installer is running the ksh script, the execution log is redirected to the below log files:

- INSTALL_HOME/dma_infa_master_install/dmalogs/dma_etl_install.log = Contains a consolidated log file that is archived to INSTALL_HOME/ dma_infa_master_install /dmalogs/tmplogs/ with the time stamp for next execution of the installer. In case of restart, logs are appended to the existing dma_etl_install.log file.
- INSTALL_HOME/dma_infa_master_install/dmalogs/tmplogs/ script name.error = Contains an error file if the script is not executed successfully.
- INSTALL_HOME/dma_infa_master_install/dmalogs/tmplogs/ script_name.done = Indicates that the script is executed successfully.

The installer generates the following reports:

• ORACLE_HOME/reports/dma_infa_installtimestamp.html = Contains the installation summary of the Data Management Assembly for Informatica installation.

Troubleshooting Timezone Errors

If you encounter the following error during installation:ORA-39367: Statistics are being skipped. Cannot locate the time zone version 26 file. Refer to the workaround mentioned on My Oracle Support (MOS):

https://support.oracle.com/epmos/faces/DocumentDisplay?id=1614247.1

Troubleshooting Guidelines

- The OUI installer does not fix any issues automatically. If the installation fails, you must verify and fix the issues before restarting the installer.
- You must provide unique repository schema names. The installer imports the ETL
 metadata into these schemas. However, upon restarting the installer for any failures, you
 must specify the same values that were entered for the previous execution.
- When reporting any problems that occur during installation, make sure that you include all
 the above log files. Check which components were installed successfully using the
 following query by connecting to the enterprise schema:

```
Select * from W EHA PRODUCT VERSION
```

Send the result of the query when reporting any problems to Oracle support.

Troubleshooting

- If the installer fails while executing the python script:
 - Review the logs.
 - 2. Analyze and fix the issue.
 - 3. Restart the installer with same installation home parameters.

For example, if the password expiry notification is displayed, reset the password and restart the installer.

- If the installer fails while executing the ksh script:
 - 1. Review the logs.
 - 2. Analyze and fix the issue.
 - 3. Restart the installer with same installation home parameters.

For example, if a particular directory does not have the write permission, provide the permission and restart the installer.

- To skip any execution process, create a zero byte done file in the temp directory using the following steps:
 - Navigate to the following folders and select the appropriate script: INSTALL_HOME/dma_infa_master_install/dmascripts/
 - Remove .ksh from the file, append .done to the file, and place a zero byte file in the temp log folder.

```
INSTALL HOME/dma infa master install/dmalogs/tmplogs
```

Unable to upgrade INFA repository without being in exclusive mode



- Connect to the Informatica Admin console.
- 2. Connect to repository services.
- Select the Properties tab, then Repository Properties update and then Operating Mode as Normal.
- 4. Refresh the repository services.

ETL Performance Troubleshooting

Performance of Informatica ETLs might slow down over time due to the increased number of records in the HDI_ETL_EXCPTN_LOG_G table. To improve HDI to HDM ETLs performance, it is recommended to partition the HDI_ETL_EXCPTN_LOG_G and HDI_ETL_EXCPTN_LOG_TMP by running SQL statements provided in the scripts below manually one at a time.

1. Navigate to the directory:

```
<OHF_INSTALLER_ZIP>/Disk1/stage/Components/oracle.hsgbu.hc.dma.infa/
8.2.5.0.0/1/DataFiles/Expanded/filegroup1
```

- 2. Unzip dma infa master install.zip
- 3. Use the following script:

```
@OHF_Install_Home/dma_infa_master_install/hmc_infa_install/
wil_hmc_HDI_ETL_EXCPTN_LOG_tables_online_partition.sql
```



Middle-Tier Troubleshooting

Review the following:

- Installation Log Files
- Troubleshooting the Primary Node Installation
- Troubleshooting the Secondary Node Installation
- Troubleshooting Coherence Cluster Errors
- Troubleshooting the JAVA_HOME Error

Installation Log Files

The installation log files are located at <code>\$ORACLE_BASE/oraInventory/logs</code>. For example: /u01/app/oraInventory/logs.

When installing the Oracle Healthcare Foundation Middle-Tier, the installer generates the following installation log files:

Log File	Description
installActions <i>timestamp</i> .log	Records the actions of the installer and can be used to diagnose issues with the installer.
oralnstall timestamp.out	Records the outputs of all the scripts run by the installer.
oralnstall <i>timestamp</i> .err	Records the errors from all the scripts run by the installer.

The log files are time stamped and each installation session creates a new set of log files.

An installation summary with all of the parameters provided for the installer is saved at:

INSTALL HOME/reports/dps install timestamp.html



When reporting any problems that occur during Middle-Tier installation, make sure that you include all the above log files.

Troubleshooting the Primary Node Installation

Issue	Fix
The installer fails due to the time taken by the node manager process to start.	Check the machine network configuration to make sure that other processes are listening on same port, and that the user running the installer has the required file system permissions.

Issue	Fix
The AdminServer fails to start because the node manager process is not available.	Verify if the node manager process is still running.
A wrong database configuration is provided.	Modify the database configuration from the Oracle WebLogic Server Admin console.

Troubleshooting the Secondary Node Installation

Issue	Fix
The installer fails to connect to the AdminServer	Verify if the AdminServer is running on the primary node by accessing the Oracle WebLogic Server Admin console from the secondary node.
The installer fails due to a wrong FMW path.	Make sure Oracle WebLogic Server is installed in the same file system location as on the primary node.

Troubleshooting Coherence Cluster Errors

Sometimes, a primary or secondary node may not start due to one of the following errors in the Oracle WebLogic Server log files:

- Warning (thread=Cluster, member=n/a): Received a discovery message that indicates the presence of an existing cluster that does not respond to join requests; this is usually caused by a network layer failure.
- Warning (thread=Cluster, member=n/a): Delaying formation of a new cluster;
 IpMonitor failed to verify the reachability of senior Member...

If this persists it is likely the result of a local or remote firewall rule blocking either ICMP pings, or connections to TCP port 7.

To overcome these errors, make sure that the DNS resolutions for the primary and secondary node machines lead to the same IP address when you ping the machines from the local system or from other systems.

Troubleshooting the JAVA HOME Error

The OHF installer gives an error indicating that the jdk is not accessible if JDK updates are applied after the Oracle Fusion Middleware applications are installed.

To address this error:

- 1. For information on working around this error, see: https://docs.oracle.com/en/middleware/fusion-middleware/14.1.2.0.0/infup/shared-updating-jdk-installing-and-configuring-oracle-fusion-middleware-product.html#GUID-4230A928-7BE8-4D23-B8F9-1CB2D4EDEC33
- If the OHF installer is not launching due to a JDK not found error, then run OHF installer with this command:

./runInstaller.sh -jreLoc <jdk_path> <use remaining parameters as per the install documentation>



Configuration Guide for Exadata

This guide describes the Exadata configuration for Oracle Healthcare Foundation. It contains minimum parameter requirements for a large deployment of about 10 million patients.

The contents of this guide apply only to the Oracle Healthcare Foundation ETL platform and does not consider any application stack.

This guide contains the following sections:

- System Configuration
- Application Considerations

System Configuration

Review the following:

- Exadata Component Configuration
- Database Configuration

Exadata Component Configuration

Table A-1 Exadata Components and Configuration

Component	Configuration
Exa check	Run the Exachk utility and verify the adherence to the recommended Exadata best practices.
	For more information, see article ID 1070954.1 on My Oracle Support (https://support.oracle.com).
RAC	Use defaults and native load balance.
High performance disks	We recommend 15000 revolutions per minute (RPM) high performance disks.

Database Configuration

Review the following:

- Database I/O Calibration
- Resource Manager
- Database Parameters
- Parallel Degree Policy
- Oracle Automatic Stats Job
- Tablespace and Redo Log Recommendations
- ASM Recommendations



Maximum Availability Recommendations

Database I/O Calibration

Run the I/O calibration tool for each database to set the automatic degree of parallelism.

For more information on I/O calibration and automatic degree of parallelism, see the I/O Calibration Inside the Database section in the Oracle 12.2 Database Performance Tuning Guide as well as article IDs 727062.1 and 1269321.1 on My Oracle Support (https://support.oracle.com).

Resource Manager

Use the Oracle Resource Manager to manage and prioritize the resource allocation for different applications, databases, instances, users, and so on.

For more information, see article ID 1339769.1 on My Oracle Support (https://support.oracle.com) and the White Paper Using Oracle Database Resource Manager.

Database Parameters

Table A-2 Recommended Settings for Database Parameters

Database Parameter	Recommended Settings
processes	1500
parallel_max_servers	500-1280
parallel_min_servers	128
parallel_degree_policy	LIMITED
parallel_adaptive_multi_user	TRUE
parallel_degree_limit	CPU
parallel_force_local	FALSE
sga_target	40 GB
sga_max_size	40 GB
pga_aggregate_target	If HugePages is used, set this parameter to 20 GB. Else, set it to 12 GB.
memory_target	If HugePages is used, set this parameter to 0. Else, set it to 60 GB.
memory_max_target	If HugePages is used, set this parameter to 0. Else, set it to 60 GB.
db_block_size	8192
workarea_size_policy	AUTO
db_cache_size	2 GB
shared_pool_size	2 GB
optimizer_secure_view_mer ging	False
_px_join_skew_handling	FALSE
result size max	0
_optimizer_dsdir_usage_con trol	0



Parallel Degree Policy

Set the parallel_degree_policy parameter to LIMITED to use the automatic degree of parallelism and smart scans.

- The Omics Data Bank (ODB) application uses Exadata SQL processing innovations.
 Setting this parameter to LIMITED disables the in-memory parallel execution that leads to better use of smart scans.
- Statement queuing is disabled to avoid any waits under heavy load where there are chances of draining all PX servers thereby impacting response times.

Parallel Degree Limit

Set the parallel_degree_limit parameter to CPU or below to improve the response time. A resource-intensive query may request too many PX servers, draining available resources. Use the Resource Manager to limit the resource allocation to intensive or long running processes.

Adaptive Tuning

Set the parallel_adaptive_multi_user parameter to TRUE, which lets Oracle downgrade PX requests under stress. You should not over-burden the database CPUs by allocating all requested PX servers, especially when the database nodes are running at over 80% CPU load.

Alternatively, you can use the Resource Manager to control resources.

Parallel Max Servers

Set the parallel_max_servers parameter between 500-1280 to make sure that there are enough PX server processes to allocate to concurrent user requests. In benchmark tests, this was set to 512.

Parallel Min Servers

Set the parallel_min_servers parameter to CPU to ensure the availability of a specific number of PX server processes at startup.

Memory Settings

Set the Automatic Memory Management (AMM) using the memory target parameter to 60 GB.

Also, you have to set the Program Global Area (PGA) (pga_aggregate_target parameter) to a minimum of 20/10 GB depending upon whether HugePages is used and the System Global Area (SGA) (sga_max_size parameter) to a minimum of 40 GB.



If you use HugePages, set all DB memory parameters appropriately as AMM does not work with HugePages. If you encounter any shared pool issues with HugePages, switch to alternate recommended settings.

Processes

Set the processes parameter to a sizeable number based on the expected concurrency. The minimum value should be 1024. In internal benchmarks, it was set to 2000 based on concurrent loads.



Oracle Automatic Stats Job

Disable the Oracle Automatic Stats job if it is configured.

Automatic statistics scheduler jobs run under different maintenance windows (such as daily, weekly, and so on). This may potentially generate bad statistics due to data availability (for example, the application may have transient data or no data in stage tables).

Tablespace and Redo Log Recommendations

Table A-3 Tablespace Recommendations

Tablespace	Recommended
TEMP	500 GB across all nodes.
UNDO	500 GB per instance.



Use the BigFile tablespace for TEMP, UNDO, and user (HDI, HDM, HCD, CDM, and ODB) tablespaces to ease tablespace maintenance.

Configure the redo logs to have at least five groups per instance with each member having a size of 500 MB or higher.

ASM Recommendations

Redundancy - Oracle uses NORMAL redundancy for all benchmarks. You can use HIGH redundancy as per the data mirroring requirements. However, note that the usable storage is lower when using ASM with HIGH redundancy disk groups.

ASM AU Size - We recommend you use the default setting for the disk sequential reads.

Maximum Availability Recommendations

You may want to consider the recommendations in the White Paper Best Practices for Database Consolidation on Exadata Database Machine.

Application Considerations

Review the following:

- General Recommendations
- Oracle Healthcare Foundation
- · Cohort Data Model
- Omics Loaders



General Recommendations

Oracle Table or Schema Statistics:
 Configure the scheduled jobs to collect the Oracle statistics using the following method.
 This should be configured after the initial load is complete.

```
eBEGINDBMS_SCHEDULER.create_job ( job_name => 'OWNER_STATS', job_type =>
'PLSQL_BLOCK', job_action => q'[BEGIN dbms_stats.gather_schema_stats
(ownname=> 'OWNER', method_opt=> 'for all columns size auto',
estimate_percent=> dbms_ stats.auto_sample_ size, cascade=>true, block_sample
=> true, options => 'GATHER STALE'); END;]', start_date => sysdate,
repeat_interval => 'FREQ=DAILY; BYHOUR=0', end_date => NULL, enabled => TRUE,
comments => 'Table stats gathering job for OWNER.'); END;/
```

 Data files or flat files (for example, Oracle Database result and reference data files) should be staged on Database File System (DBFS) as the Oracle Database provides much better security, availability, robustness, transactions, and scalability than the traditional file systems. For setting up DBFS, see article ID 1054431.1 on My Oracle Support (https:// support.oracle.com).

Oracle Healthcare Foundation

- Oracle Table or Schema Statistics:
 HDI source tables should have proper table statistics before the initial load. See Oracle Healthcare Foundation Administrator's Guide for details on gathering statistics and for ETL-specific recommendations regarding parallel options.
- Oracle Healthcare Foundation Data loads:
 - When you load HDI data, make sure that you load data using the direct path insert to obtain a high compression ratio. For more information about improving INSERT performance with Direct-Path INSERT, see the *Oracle Argus Insight Database Administrator's Guide*, and implement accordingly for your ETL loads to HDI.
 - If direct path insert is not possible due to code or ETL limitations, rebuild the tables or partitions using the alter table .. move .. SQL command (indexes on these tables should be rebuilt) to achieve better compression. However, this leads to regular maintenance of these tables to achieve maximum compression. Oracle recommends that you create scripts or ETL to support direct path insert rather than resorting to regular maintenance. For more details, see Oracle Healthcare Foundation Programmer's Guide.

Cohort Data Model

See Oracle Health Sciences Translational Research Center Installation Guide for Exadataspecific configurable partitioning and parallel options.

Omics Loaders

Run the result files in parallel to achieve maximum throughput.



You can execute maximum 4gVCF loaders on a single Exa node.

See Data Model Installation for Exadata-specific configurable partitioning and parallel options.



B

Configuration Guide for Non-Exadata

This guide details the Non-Exadata configuration for the Oracle Healthcare Foundation. It contains minimum parameter requirements for a medium deployment (about 3 million patients).

The contents of this guide apply only to the Oracle Healthcare Foundation ETL platform and does not consider any application stack.

This guide contains the following sections:

- Database Configuration
- Application Considerations

Database Configuration

Review the following:

- Database I/O Calibration
- Resource Manager
- Database Parameters
- Parallel Degree Policy
- Oracle Automatic Stats Job
- Tablespace and Redo Log Recommendations
- ASM Recommendations

Database I/O Calibration

Run the I/O calibration tool for each database to set the automatic degree of parallelism.

For more information on I/O calibration and automatic degree of parallelism, see the I/O Calibration Inside the Database section in Oracle 12.2 Database Performance Tuning Guide as well as article IDs 727062.1 and 1269321.1 on My Oracle Support (https://support.oracle.com).

Resource Manager

Use the Oracle Resource Manager to manage and prioritize the resource allocation for different applications, databases, instances, users, and so on.

For more information, see article ID 1339769.1 on My Oracle Support (https://support.oracle.com) and the White Paper *Using Oracle Database Resource Manager*.

Database Parameters

Table B-1 Recommended Settings for Database Parameters

Database Parameter	Recommended Settings
processes	2000
-	384
parallel_max_servers	
parallel_min_servers	32
<pre>parallel_degree_polic y</pre>	LIMITED
<pre>parallel_adaptive_mul ti_user</pre>	TRUE
parallel_degree_limit	16
sga_target	20 GB
sga_max_size	20 GB
pga_aggregate_target	If HugePages is used, set this parameter to 20 GB. Else, set it to 10 GB.
memory_target	If HugePages is used, set this parameter to 0. Else, set it to 40 GB.
memory_max_target	If HugePages is used, set this parameter to 0. Else, set it to 60 GB.
db_block_size	8000
workarea_size_policy	AUTO
db_cache_size	2 GB
shared_pool_size	2 GB
<pre>optimizer_secure_view _merging</pre>	FALSE
_px_join_skew_handlin	FALSE
result size max	0
_optimizer_dsdir_usag e_control	0

Parallel Degree Policy

Set the parallel_degree_policy parameter to LIMITED to use the automatic degree of parallelism.

Statement queuing is disabled to avoid any waits under heavy load where there are chances of draining all PX servers, thereby impacting response times.

- Parallel Degree Limit
- Adaptive Tuning
- Parallel Max Servers
- Parallel Min Servers
- Memory Settings



Processes

Parallel Degree Limit

Set the parallel_degree_limit parameter to 16 or below to improve the response time. A resource intensive query may request too many PX servers, draining available resources. Use the Resource Manager to limit the resource allocation to intensive or long running processes.

Adaptive Tuning

Set the parallel_adaptive_multi_user parameter to TRUE, which lets Oracle downgrade PX requests under stress. You should not over-burden the database (DB) CPUs by allocating all requested PX servers, especially when the DB nodes are running over 80% CPU consumption.

Alternatively, you can use the Resource Manager to control resources.

Parallel Max Servers

Set the parallel_max_servers parameter to 384 or less to make sure that there are enough PX server processes to allocate to concurrent user requests.

Parallel Min Servers

Set the parallel_min_servers parameter to 32 to ensure the availability of a specific number of PX server processes at startup.

Memory Settings

Set the Automatic Memory Management (AMM) using the memory target parameter to 40 GB.

You should also set the Program Global Area (PGA) (pga_aggregate_target parameter) to a minimum of 20/10 GB depending on whether HugePages is used and the System Global Area (SGA) (sga max size parameter) to a minimum of 20 GB.



If you use HugePages, set all DB memory parameters appropriately as AMM does not work with HugePages. If you encounter any shared pool issues with HugePages, switch to alternate recommended settings.

Processes

Set the processes parameter to a sizeable number based on the expected concurrency. In internal benchmarks, it was set to 2000 based on concurrent loads.

Oracle Automatic Stats Job

Disable the Oracle Automatic Stats Job if it is configured.

Automatic statistics scheduler jobs run under different maintenance windows (such as daily, weekly, and so on). This may potentially generate bad statistics due to data availability (for example, an application may have transient data or no data in stage tables).



Tablespace and Redo Log Recommendations

Table B-2 Tablespace Size Recommendations

Tablespace	Recommended Size
TEMP	500 GB per RAC node
UNDO	500 GB per RAC node



Use the BigFile tablespace for TEMP, UNDO, and user (HDI, HDM, HCD, CDM, and ODB) tablespaces to ease tablespace maintenance.

Configure the redo logs to have at least five groups per instance with each member having a size of 500 MB or higher.

ASM Recommendations

Redundancy - Oracle uses NORMAL redundancy for all benchmarks. You can use HIGH redundancy as per the data mirroring requirements. However, note that the usable storage is lower when using ASM with HIGH redundancy disk groups.

ASM AU Size - We recommend you use the default setting for the disk sequential reads.

Application Considerations

Review the following:

- General Recommendations
- Oracle Healthcare Foundation
- Cohort Data Model
- Omics Loaders

General Recommendations

Oracle Table or Schema Statistics:
 Configure the scheduled jobs to collect the Oracle statistics using the following method.
 This should be configured after the initial load is complete.

```
BEGINDBMS_SCHEDULER.create_job ( job_name => 'OWNER_STATS', job_type =>
'PLSQL_BLOCK', job_action => q'[BEGIN dbms_stats.gather_schema_stats
(ownname=> 'OWNER', method_opt=> 'for all columns size auto',
estimate_percent=> dbms_ stats.auto_sample_ size, cascade=>true, block_sample
=> true, options => 'GATHER STALE'); END;]', start_date => sysdate,
repeat_interval => 'FREQ=DAILY;BYHOUR=0', end_date => NULL, enabled => TRUE,
comments => 'Table stats gathering job for OWNER.');END;/
```

 Data files or flat files (for example, ODB result and reference data files) should be staged on Database File System (DBFS) as the Oracle Database provides much better security, availability, robustness, transactions, and scalability than the traditional file systems. For setting up DBFS, see article ID 1054431.1 on My Oracle Support (https://support.oracle.com).

Oracle Healthcare Foundation

Oracle Table or Schema Statistics:

HDI source tables should have proper table statistics before the initial load. See *Oracle Healthcare Foundation Administrator's Guide* for ETL-specific recommendations regarding parallel options.

Cohort Data Model

See *Oracle Healthcare Translational Research Installation Guide* for Non-Exadata specific configurable partitioning and parallel options.

Omics Loaders

- Run the result files in parallel to achieve maximum performance.
- See Data Model Installation for Non-Exadata specific configurable partitioning and parallel options.

