# Oracle® Hospitality Cruise Shipboard Property Management System Credit Card Setup Guide — Multiple Formats





Oracle Hospitality Cruise Shipboard Property Management System Credit Card Setup Guide — Multiple Formats, Release 20.2

F44435-03

Copyright © 2015, 2023, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

# Contents

# Preface

Prerequisites, Supported Systems, and Compatibility	1-1
SPMS Parameters	1-1
System Configuration	1-3
Registration of Credit Card	1-3
Registering Credit Card in Advance Quick Check-In (AQCI)	1-5
Credit Card Transfer Interface	1-6
Troubleshooting	1-11
Generic Credit Card	
SPMS Parameters	2-1
System Configuration	2-3
Department Setup	2-3
Receipt Setup	2-5
Transaction Services Installation	2-5
Registering a Credit Card	2-5
Creating Incremental / Top up Authorization File	2-7
Reading Authorization File	2-9
Obtaining Manual Authorization	2-10
Creating Settlement File	2-11
Report	2-12
Troubleshooting Section	2-13
Generic Credit Card Mapping Fields	2-15
Sample BIN Range	2-20
Ingenico Format	
Prerequisite, Supported Systems, and Compatibility	3-1
SPMS Parameters Ingenico	3-1



	System Configuration ingenico	3-3
	Merchant Setup	3-5
	Merchant Credentials	3-5
	Ingenico OHC Ship Transfer	3-7
	Checking Amount Authorized in Management module	3-8
	Processing Credit Card Batch	3-9
	Generating Batch Authorization	3-9
	Generating Batch Settlement	3-12
	Setting up a Report	3-15
	Troubleshooting Ingenico	3-16
	Appendices	3-19
	Sample BIN Ranges Ingenico	3-20
4	Servebase Format	
	Prerequisite, Supported Systems, and Compatibility	4-1
	SPMS Parameters Servebase	4-1
	System Configuration Servebase	4-3
	Setting up Merchant Details	4-5
	Servebase Web Services Installation	4-7
	Store Forward Handling	4-8
	Setting up Device	4-8
	OHC Ship Transfer Setup	4-10
	Configuring OHC Ship Transfer	4-11
	Registering a Credit Card Servebase	4-12
	Settling a Credit Card Batch	4-12
	Performing a Credit Card Refund	4-13
	Registering Credit Card in Advanced Quick Check In (AQCI)	4-14
	Sample Response File in Ship Transfer	4-15
	Synopsis	4-17
	Troubleshooting Servebase	4-30
5	PAYPOINT	
	SPMS Parameters Paypoint	5-1
	System Configuration Paypoint	5-3
	OHC Transfer Setup	5-5
	Paypoint Workflow	5-6
	PAYPOINT Handling	5-7
	Setting up Device in Advance Quick Check-In module	5-8
	Viewing Authorization Amount in Management module	5-9



	OHC Ship Transfer (Sample Response Message)	5-10
	Troubleshooting PAYPOINT	5-11
6	NCL DCC	
	SPMS Parameters NCL DCC	6-1
	Configuring SPMS	6-2
	Hardware Setup	6-3
	System Configuration NCL DCC	6-4
	Setting up Receipt	6-4
	Importing Credit Card BIN	6-4
	Loading the BIN File	6-5
	Setting up PGP Encryption	6-5
	Using the Verifone Card Device	6-6
	OHC Advanced Quick Check In	6-9
	OHC Credit Card Transfer	6-11
	Batch File Processes	6-12
	Reading an Authorization	6-14
	Generating an Incremental File	6-16
	Generating Incremental File with Authorization Template	6-17
	Generating Settlement File	6-19
	Recreating a Settlement File	6-20
	Mapping Fields	6-21



# **Preface**

This document explains how to set up the credit card interfaces to communicate with the shore-side Credit Card Service Providers to obtain card authorizations and settlements. Included in this guide are the credit card interfaces for:

- Papagena Format
- Generic Credit Card Format
- Ingenico Handling
- Servebase Handling
- Paypoint Handling
- NCL DCC Handling

#### **Audience**

This document is intended for installers, programmers, technical support teams, product specialists and others who are responsible for setting up Oracle Hospitality Cruise Shipboard Property Management System (SPMS) version 20.2.

## **Customer Support**

To contact Oracle Customer Support, access the Customer Support Portal at the following URL:

## https://iccp.custhelp.com

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received and any associated log files
- Screen shots of each step you take

#### **Documentation**

Oracle Hospitality product documentation is available on the Oracle Help Center at <a href="http://docs.oracle.com/en/industries/hospitality/cruise.html">http://docs.oracle.com/en/industries/hospitality/cruise.html</a>.



# **Revision History**

Table 1 Revision History

Date	Description of Change
September 2021	Initial publication.
March 2022	Made minor grammatical changes.
December 2023	Updated new customer portal.



1

# Papagena Format

The following section describes the setup and usage of Credit Card Transfer for PAPAGENA Handling.

# Prerequisites, Supported Systems, and Compatibility

# Compatibility

SPMS version 20.2 or later. For customer operating on version below 20.2, database upgrade to the recommended or latest version is required.

# Prerequisites, Supported Systems, and Compatibility

This section describes the minimum requirements for PAPAGENA Credit Card handling and supported peripherals.

## **Prerequisites**

- Credit Card Transfer.exe
- Tools.exe
- SPMS parameters
- SPMS DLL
  - MTIPADLIB.dll
  - IPADLIB.dll

# **SPMS** Parameters

This section describes the parameters available to the Credit Card Transfer module which are accessible from **Administration module**, **System Setup**, **Parameter** function.

Table 1-1 PAR \_GROUP General

PAR Name	PAR Value	Description
Enable Signature Capture for Credit Card	0 or 1	Prevent the credit card registration without a signature when enabled.
		0 - Disable Signature Capture for Credit Card.
		1 - Enable Signature Capture for Credit Card.

Table 1-1 (Cont.) PAR \_GROUP General

PAR Name	PAR Value	Description	
Disable C/Card and Posting when auth is decline	0 or 1	0 - No credit card deactivation and no posting disable.	
		1 - Deactivate the credit card followed by the posting if there are no other active credit cards.	
		2 - Deactivate the credit card. Posting remains enabled.	
Top Up Percentage	<value></value>	Specify top up percentage to be calculated with the total authorized amount.	
		For example, Total Auth Amount=1000 * 15% = 1150 as New Auth Amount.	
Test Auth Amount	<value></value>	Specify PAPAGENA test authorization amount for both online and offline mode.	
Card Track Data not Stored	<blank></blank>	List of card types that should not store or track data in the database. Format ('Card Type 1','Card Type 2').	
		For example, ('DS','DI','JC','DC').	
Allow Manual Card Entry for Papagena	0 or 1	0 - Do not allow manual entry when card swipe fail.	
		1 – Allow Manual Entry when card swipe fails.	

Table 1-2 PAR\_GROUP Interfaces

PAR Name	PAR Value	Description
Batch CCard Processing Format	PAPAGENA	Specify the message format to be generated by Credit Card Transfer program.
Merchant ID	<character></character>	Defines the Merchant ID for the authorization file.
CC Auth/Settlement Folder	Folder path	Repository location for authorization/settlement files generated by OHC Credit Card Interface.
		Note: To avoid adverse impact on your system, please abstain from using the following folder path:
		<ul> <li>System Directory</li> <li>"\Users\Public\Documen ts\Oracle Hospitality Cruise"</li> </ul>



# System Configuration

This section describes the setup of various system codes required by PAPAGENA handling. These codes are set up in **Administration module**, **Financial Setup**, **Department**.

## **Department Setup**

For charging and posting, a debit and credit department code for each credit card type accepted by the ship must be configured in SPMS.

# Credit/Debit Card Department Code Setup

- 1. Log in to the **Administration module** and select **Financial Setup, Department Setup** from the drop-down list.
- 2. Click **New** to create a Sub-Department code.
- Under the Main Department section, enter the credit/debit card information such as Payment Type, Department Code, and Description.
- 4. In the Payment Type Details section,
  - a. Enter the first two digits of the first set of credit card number in the Credit Card digits.
  - b. Enter the Credit Card ID. For example, MC MasterCard, VI Visa, and others.
  - c. Select the corresponding **Credit Card Internal ID** from the drop-down box.
  - d. Enter the Credit Card Merchant Number provided by the Service Provider.
  - e. Set the Minimum Authorized Value to 0.
  - f. Select the Commission Department from the drop-down list and update the Commission Rate in percentage.
  - g. Check the **Debit Card No Commission** charge if the commission is not applicable to debit card.
- In the Department Security access, select the appropriate security level from the dropdown box.
- **6.** Select the **Payment Type** in Payment Department Type. Options are: Both Credit and Debit card, Credit card, or Debit card.
- 7. Click OK to save.

#### **Receipt Setup**

You can generate a receipt upon payment, which requires setting up a report template. A Standard Credit Card receipt template is available in **Administration module, System Setup, Receipts Group**. Contact Oracle Hospitality Cruise Support if you would like to configure a customized receipt format.

# Registration of Credit Card

The SPMS program does not allow credit card registration without a signature if the **Enable Signature Capture for Credit Card** parameter is enabled, and a signature device is configured in the hardware option setup.

## **Registering Credit Card in Management module**

1. Log in to the Management module and select **Guest** from the **Cashier Menu**.



- 2. Select a checked-in **guest** and click the **Get Credit Card** button.
- 3. The system prompts to swipe a card through a reader.
- 4. After you swipe the credit card, the credit card details, validity and status of the card populates onto the Guest Handling, Credit Card Entry screen. If the card is valid, the card status shows Credit Card Accepted.

Figure 1-1 Credit Card Entry Screen



- 5. Click **OK** to proceed with payment card registration or click **Cancel** to terminate the payment card registration process.
- 6. When you click **OK**, the system prompts a signature screen for the card holder to sign and activates when the **Enable Signature Capture for Credit Card** parameter is enabled and a Signotec LCD Signature Pad Omega is installed.
- 7. Allow the cardholder to place the signature on the Signotec Signature pad and press the **green check mark** to complete the credit card registration. To capture a new signature, press the **Refresh** icon to clear the screen.
- **8.** After the registration is successful, this set offs a confirmation prompt. Click **OK** to confirm. If the '**X**' is clicked, this cancels the token request.

Figure 1-2 Credit Card Screen — Credit Card Registration is Complete







Figure 1-3 Signature Screen — User Cancel Signature Action




The credit card information and signature captured are stored in the Guest Handling Credit Card tab.

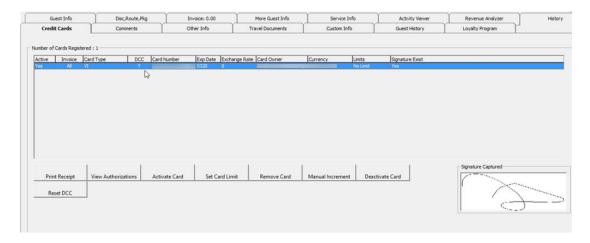

# Registering Credit Card in Advance Quick Check-In (AQCI)

- 1. Start the AQCI program and select a checked-in passenger.
- 2. Click the **Get Credit Card** button at the ribbon bar. Both devices prompt 'Please Swipe card'. At the Request Token prompt, swipe the credit card through a card reader device.
- 3. The detailed from the swiped credit card populate under Credit Card Details field. Click **Save** at the ribbon bar to save the information and this activates the signature screen on the Signotec Signature pad if the device is installed.

Figure 1-4 Advance QCI Credit Card Section

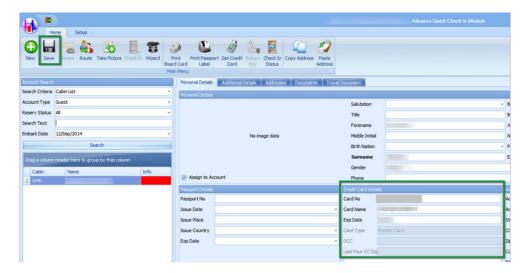



- 4. Click Save to proceed with the registration process. The signature screen prompts when the Enable Signature Capture for Credit Card parameter is enabled and the Signotec Signature Pad is installed.
- The registered credit card details are stored in the Guest Handling, Credit Card tab.

# Credit Card Transfer Interface

The Credit Card Interface has several functions enabled for PAPAGENA handling through the Credit Card Batch Authorization. Refer to the following table:

Table 1-3 Credit Card Transfer Interface Functions

Authorization	Settlement
<ul><li>Test File</li><li>New Authorization File</li></ul>	<ul><li>New Settlement File</li><li>Read Settlement File</li></ul>
Read Authorization File	
<ul> <li>Manual Authorization File</li> </ul>	

## **Creating Test Authorization File**

- 1. Start the Credit Card Transfer Interface and select the Authorization menu.
- 2. Select the **Test File** option from the drop-down menu.
- 3. All payment cards requiring authorization are listed in the Test Authorization screen, with the exception of credit card registered with a token.

Figure 1-5 Credit Card Transfer — Test Authorization Screen



4. Click **Process** to generate the Test Authorization. The amount shown in the Test Authorization is the value set within the **Test Auth Amount** parameter.

## **Creating Initial Authorization File**

- Repeat step 1 of Creating Test Authorization File and then select New Authorization File from the drop-down menu.
- 2. All payment cards requiring an incremental authorization are listed in the PAPAGENA Credit Card Authorization Write screen.



Papagena Credit Card Authorization Write - E X Embarked Open Authorization Cabin First Name Last Name Card No. Card Expiry Invoice AX AMEX Card AX American Express 0.00 0.00 0.00 0.00 0.00 0.00 0.00 1,290.30 0.00 0.00 0.00 AX AMEX Card
AX American Express
BA Diners
EC EDO
EC Maestro
J JCB Micros
JC JCB
MC Master Card
MC Master Card Micros
Pressure American 11/08/2013 972.00 1,117.80 R Discover SV Disney Reward Card VI VISA Selection Criteria ☐ Guest ☐ Staff Crew System Account Filter by F All C Debark Date 20/08/2013 ☐ Group Cabin/Name [ Close

Figure 1-6 Credit Card Transfer — New Authorization Screen

- 3. The initial authorization can be generated only when the Test Authorization is approved. Following are the validation prompts during the Test Authorization when generating an initial authorization:
  - a. Credit Card registered without Test Authorization or No Test Authorization The system prompts 'There is Test Authorization not created yet'.
  - b. Credit Card registered with Test Authorization has status Outstanding or Declined -The system prompts "There is Test Authorization without response or declined response"
- 4. Click the **Process** button to generate the Initial Authorization file. After the incremental authorization file is created, the screen displays the location of the saved file. A sample of the incremental file is illustrated in Figure 1-10 Sample Authorization File

Figure 1-7 Sample Authorization File



5. The authorization status of the card appears as *Outstanding* in the **Management module**, **Guest Handling**, **Credit Card** tab, **View Authorization** function.


## **Reading Authorization File**

After the authorization request is processed by the Merchant/Service Provider, a response file with authorization codes is returned. These authorization codes are updated in the guest account using the Read Authorization function.

1. Repeat step 1 of *Creating Test Authorization File* and select **Read Authorization File** from the drop-down menu.


- 2. On the PAPAGENA Credit Card Authorization Read screen, select **Open** to locate the response file returned by the merchant.
- 3. Click the **Process** button to process the information on file. The screen displays a progress status.

Figure 1-8 Credit Card Transfer — PAPAGENA Credit Card Authorization Read



4. At the end of the process, the system updates the payment card status to Authorized. You can verify the status by logging into the Management module, Guest Handling, Credit Card tab, View Authorization function.

Figure 1-9 Management - Authorization Screen

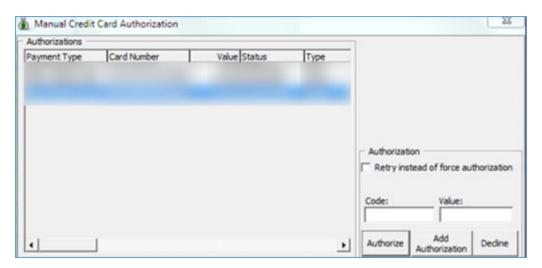

The above process also updates the CRD\_TOKEN field followed by CCT\_TOKEN field in the database, if the settlement record is created before running the Read Authorization.

## **Creating Incremental File**

When an account balance exceeds the initial authorization amount, you must obtain an additional authorization value to allow postings to flow through the account.


The process for obtaining additional authorization is the same as the steps in *Creating Initial Authorization File* and *Reading Authorization File*.

## **Obtaining Manual Authorization**




- 1. In the Management module, Guest Handling function, select the guest account.
- 2. Navigate to the **Credit Card** tab and click **View Authorization**.
- 3. In the Authorization screen, select **Add Authorization**.
- **4.** Enter the value including the initial authorized value in the Credit Card Authorization screen when prompted and click **OK** to save.

Figure 1-10 Management — Add Authorization Screen



5. An additional authorization is added to the Authorization grid with its status shown as Outstanding. Select the line item from the grid, enter the code and value obtained, and then click Authorized. This process overwrites the existing value and changes the authorization status to Forced, and writes the authorization code into the Settlement file as the last authorization code.

Figure 1-11 Management — Manual Authorization

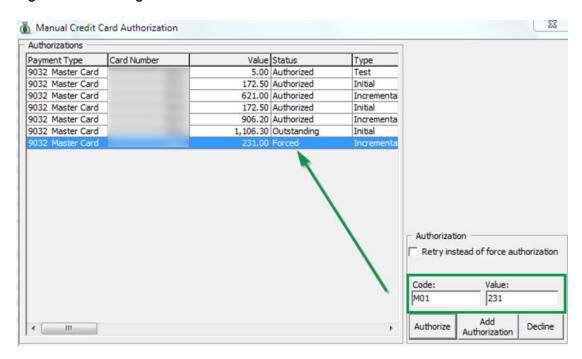

**Creating Settlement File** 



At the end of an invoice settlement, the system writes the settlement to the Settlement file to be processed in a batch.

- At the Credit Card Transfer Interface, select the Settlement menu, and select New Settlement File from the drop-down menu.
- 2. The settlement file can only be generated when the Test Authorization is approved. Below is the validation prompt during the Test Authorization when generating an initial authorization for:
  - **a.** Credit Card registered without Test Authorization or No Test Authorization the system prompts: "There is Test Authorization not created yet".
  - b. Credit Card registered with Test Authorization has status as *Outstanding* or *Declined*. The system prompts the following message: "There is Test Authorization without response or declined response."
    - If the Settlement has Test Authorization as *Outstanding* or *Declined*, this settlement only shows in the Settlement Write screen and it does not write into the Settlement File.
    - If the Settlement does not have an authorization and CCT\_TOKEN the settlement is then written into the Settlement File with CC|ORDER
- 3. Click the **Process**button to generate the Settlement File. After the Settlement file is created, the location of the saved file is displayed on the screen.

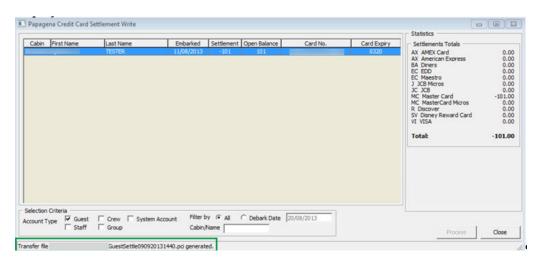


Figure 1-12 Credit Card Transfer — Settlement Write Screen


#### **Reading Settlement File**

A response file is sent back by the merchant or service provider after the settlement is processed at their end. You must upload the file and update the Settlement transactions status.

- 1. From the Settlement drop-down menu, select Read Settlement File.
- 2. On the PAPAGENA Credit Card Settlement Read screen, click the **Open File** button to locate the Settlement Response file.
- The status of the process is displayed on the Settlement Read screen. Click the Process button to read and update the Settlement record.



Figure 1-13 Credit Card Transfer — Settlement Read Screen (Ready to Process)

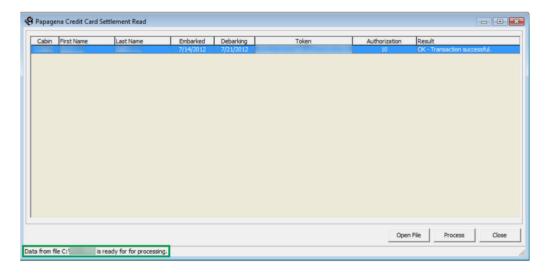

# **Troubleshooting**

This section describes the troubleshooting steps for resolving some known issues encountered in PAPAGENA Handling across various modules.

#### **Tools**

Table 1-4 Tool Known Issue and Solution

Known Issue	Solution
Error — 'Key unable to upload'	Register PGPBBox7.dll with regsvr32.exe again.
Error — 'License Key has not been set'	Register PGPBBox7.dll with regsvr32.exe again.

## **Credit Card Transfer Interface**

Table 1-5 Credit Card Transfer Interface Known Issue and Solution

Known Issue	Solution
Credit Card Transfer does not reflect correct desired credit card format	Check the credit card format setup in Administration module, System Setup, Database Parameter, 'Interfaces', 'Batch CCard Processing Format'.

# **PAPAGENA Mapping Fields**

This section describes the mapping fields used in PAPAGENA Credit Card format.

### File name format

The file naming format for PAPAGENA is explained in the following table, for example: GuestTransfer071020161138.pci



**Table 1-6 PAPAGENA File Format** 

Name	Description
Guest	The first word of the file name represents the Account Type base on the filter used to generate the authorization file.
	Guest - GuestTransfer######.pci
	Crew - CrewTransfer######.pci
	Group - GroupTransfer######.pci
	Staff - StaffTransfer######.pci
	All filter - <blank>Transfer######.pci</blank>
Transfer	The second word of the file name represents the type of transfer.
	TestTransfer = test authorization file
	Transfer = Authorization transaction file
	Settle = Settlement transaction file
071020161138	The date/time format of the authorization file:
	DDMMYYYYHHMM
pci or pcr	The file format extension of the authorization file
	pci = request file
	pcr = response file

# **Request File Format**

The following tables describes the field definitions for a Request File for Authorization and Settlement.

**Table 1-7 Request File Format** 

Field	Туре	Size	Definition
Header			
Head	Varchar	4	Fixed value: "HEAD"
data-source	Varchar	30	File sender name, example "MV SHIP"
Date	Int	12	Format: YYMMDDHHMMSS, 111019130712
file-number	Int	12	Counter for the file, example 42
Version	Varchar	4	The version string of our batch file, example 1.0
<b>Batch Record</b>			
MerchantID	Varchar	20	Merchant ID. For example HOTEL



Table 1-7 (Cont.) Request File Format

Field	Туре	Size	Definition
Paytype	Varchar	10	"CC" - for VI, MC "EDD" - for EC "TO" - for if token with value
Trxtype	Varchar	12	tstauth incauth  capture refund  tstauth: Test authorization, it is a mandatory authorization prior to generating an initial authorization. incauth: Incremental authorization increases amount of an existing authorization. Input has to be the total amount (initial+additional amount).
			capture: Book a pre- authorization. Capture amount has to be less than or equal to the authorized amount.
			refund: Refund an amount only valid for an existing order.
TransID	Varchar	50	Unique transaction identification number in ASCII. Does not support special characters.
TransID reference	Varchar	50	Reference to the original unique transaction where necessary. For example, capture, refund, incauth for an already existing transaction.
Amount	Int	9	Always in the smallest currency unit (in cent for Euro and so on, example 100 for 1 Euro), empty if Trxtype=register



Table 1-7 (Cont.) Request File Format

Field	Туре	Size	Definition
Currency	Varchar	3	Currency code according to ISO 4217 for this transaction, for example, EUR,USD, or follow the Ship's currency.
Description	Varchar	27	Note to Payee in text for Employment Development Department (EDD) Debit Card or other Payment Method.
AppCodeTel	Int	6	Special authorization code obtained manually through telephone for an authorization from an acquirer.
Customer	Varchar	27	Customer name.
CD_customerid	Varchar	16	Customer ID in Customer Relationship Management System.
CD_customertype	Varchar	12	Type of customer, for example crew, passenger, staff, and others.
CD_orderid	Varchar	16	Unique order-id.
CD_paxid	Varchar	16	Customer unique id.
CD_cruiseid	Varchar	10	Travel number.
CD_accountid	Varchar	12	On-board account number.
CD_roomid	Varchar	6	Cabin number.
CD_invoiceid	Varchar	12	Account number.
Reference	Varchar	30	Additional reference.
Token	Varchar	30-40	UUID, ex. ed4bdf30-4ac4-102f- 991a-000bcd838e00. Reference for a payment account, either from pre- registration (manifest) or earlier batch reply. Token usage is mandatory.



Table 1-7 (Cont.) Request File Format

Field	Туре	Size	Definition
CC_brand Varchar	Varchar	10	Credit card brand MasterCard, VISA, AMEX, DC, JCB.
CC_cardowner	Varchar	27	Card owner.
EDD_accountowner	Varchar	27	Bank account owner.
Track1enc	Varchar	256	For future use.
Track2enc	Varchar	256	For future use.
Track3enc	Varchar	256	For future use.
KSN	Varchar	32	For future use.
TransID reference	Varchar	50	Reference to the original unique transaction where necessary. For example, capture, refund, incauth for an already existing transaction.
Amount	Int	9	Always in the smallest currency unit (in cent for Euro and so on, example 100 for 1 Euro), empty if Trxtype=register
Currency	Varchar	3	Currency code according to ISO 4217 for this transaction, for example, EUR,USD, or follow the Ship's currency.
Description	Varchar	27	Note to Payee in text for Employment Development Department (EDD) Debit Card or other Payment Method.
AppCodeTel	Int	6	Special authorization code obtained manually through telephone for an authorization from an acquirer.
Customer	Varchar	27	Customer name.
CD_customerid	Varchar	16	Customer ID in Customer Relationship Management System.



Table 1-7 (Cont.) Request File Format

Field	Туре	Size	Definition
CD_customertype	Varchar	12	Type of customer, for example crew, passenger, staff, and others.
CD_orderid	Varchar	16	Unique order-id
CD_paxid	Varchar	16	Customer unique id
CD_cruiseid	Varchar	10	Travel number.
CD_accountid	Varchar	12	On-board account number.
CD_roomid	Varchar	6	Cabin number.
CD_invoiceid	Varchar	12	Account number
Reference	Varchar	30	Additional reference.
Token	Varchar	30-40	UUID, ex. ed4bdf30-4ac4-102f-991a-000bcd838e00. Reference for a payment account, either from preregistration (manifest) or earlier batch reply. Token usage is mandatory.
CC_brand Varchar	Varchar	10	Credit card brand MasterCard, VISA, AMEX, DC, JCB.
CC_cardowner	Varchar	27	Card owner.
EDD_accountowner	Varchar	27	Bank account owner.
Track1enc	Varchar	256	For future use.
Track2enc	Varchar	256	For future use.
Track3enc	Varchar	256	For future use.
KSN	Varchar	32	For future use.

# **Response File Format**

The following table describes the field definition for a Response File for Authorization and Settlement.

**Table 1-8 Response File Format** 

Field	Туре	Size	Definition
Head	Varchar	4	Fixed value: "HEAD".
data-source	Varchar	30	File sender name, example "MV SHIP".



Table 1-8 (Cont.) Response File Format

Field	Туре	Size	Definition
Date	Int	12	Format: YYMMDDHHMMSS, 111019130712.
file-number	Int	12	Counter for the file, for example 42.
Version	Varchar	4	The version string of our batch file, example 1.0 .
Response Record			
TransID	Varchar	50	unique transaction id.
Token	Varchar	40	Token, UUID for this payment account. Only if the payment account (credit card or EDD) is valid.
Return-code	Varchar	10	00000000 (8 zeros for OK)  NNNNNN (for Error. For example.
Status	Varchar	10	23055310).  The textual representation of return code, "OK", "Error".
Description	Varchar	255	Description for Status.
Reference	Varchar	30	Additional reference (same as input parameter).
CD_customerid	Varchar	16	Customer number from CRM.
Approvalcode	Int	6	Approval-code for this transaction.
EPAref	Int	9	EPA-Reference for this transaction, only used for Accounting.
auth_time	Varchar	20	Server time stamp for the single transaction,
			format YYYY-MM- DDTHH:MM:SS as UTC Time.
Footer			
Foot	Varchar	4	Fixed value: "FOOT".
Counter	Int	9	Total number of records.



# Generic Credit Card

The Credit Card Transfer is an interface that communicates with the shore-side Credit Card Service provider to obtain the card authorization and settlement through batch transfers.

## Prerequisite, Supported Systems, and Compatibility

This section describes the minimum requirements to operate the supported credit card device for Generic Credit Card Handling.

## **Prerequisite**

Credit Card Transfer.exe

Tools.exe

**SPMS** Parameters

### Compatibility

SPMS version 20.1 or later. For customer operating on version below 20.1, database upgrade to the recommended or latest version is required.

# **SPMS Parameters**

This section describes the parameters available to the Credit Card Transfer module. They are accessible in **Administration module**, **System Setup**, **Parameter** function.

# **PAR\_GROUP General**

Table 2-1 PAR Group General

PAR Name	PAR Value	Description
Enable Signature Capture for Credit Card	0 or 1	0 - Disables Signature Capture for Credit Card.
		1 - Enables Signature Capture for Credit Card.
Number of day before debarkation	2	Specifies the number of days before guest debarkation date to swipe the exact amount for debit/credit card in online mode.
Disable C/Card and Posting when auth is decline	0 or 1 or 2	0 - No credit card deactivation and no posting is disable.
		1 - We will deactivate the credit card first. If there is no more active credit card, the guest posting will be disable.
		2 - Deactivates the credit card but posting is still enable.



Table 2-1 (Cont.) PAR Group General

PAR Name	PAR Value	Description
Online Initial Auth Amount	<amount></amount>	Specifies the initial authorization amount for all card types when card is swiped at the terminal in Online mode.
Online Debit Initial Auth Amount	10, 20, 30, 40	Specifies four amounts for the debit card initial authorization amount.
Top Up Percentage	<value></value>	Specifies the top up percentage to be calculated with the total authorized amount. For example: Total Auth Amount=1000 * 15% = 1150.
Number of Credit Card Front Digit to Display	<value></value>	Only value 0 - 6 is allowed in this parameter.
		The value define in this parameter is to reflect the front digit of the credit card number in the report.
Card Track Data not Stored	<blank></blank>	List of card types that should not store track data in the database. Format ('Card Type 1','Card Type 2').
		For example: ('DS','DI','JC','DC')

# PAR\_GROUP Interfaces

Table 2-2 PAR Group Interfaces

PAR Name	PAR Value	Description
Batch CCard Processing Format	OHCCreditCard	Specifies the message format to be generated by Credit Card Transfer.
Merchant ID	<character></character>	Defines the Merchant ID for the authorization file.
CC Auth/Settlement Folder	Folder path	Repository location for authorization/settlement files generated by OHC Credit Card Interface.
		Note: To avoid adverse impact on your system, please abstain from using the following folder path:
		System Directory"\Users\Public \Documents\Oracle Hospitality Cruise"



## PAR\_GROUP Not Specified

Table 2-3 PAR\_GROUP Not Specified

PAR Name	PAR Value	Description
CC Transfer Format	OHCCreditCard	Specifies the message format to be generated by Credit Card Transfer.

# **System Configuration**

This section describes the setup of various system codes required by the Generic Credit Card handling and these codes are setup in **Administration module**, **Financial Setup**, **Department Setup**.

# Department Setup

## **Department Setup**

A debit and credit department code for each credit card type accepted by the ship must be configured for charging and posting to take place.

## **Credit/Debit Card Department Code Setup**

- Log in to the Aministration module and select Financial Setup, Department Setup from the drop-down list.
- 2. Click **New** to create a Sub-Department code.



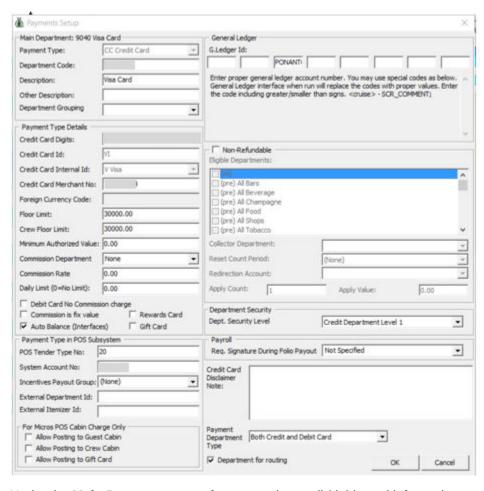


Figure 2-1 Department Code Setup

- 3. Under the **Main Department section**, enter the credit/debit card information such as payment type, department code, and description.
- 4. In the Payment Type Details section,
  - Enter the first two digits of the first set of the credit card number in Credit Card digit.
  - Enter the Credit Card ID, for example MC MasterCard, VI Visa, and others.
  - c. Select the corresponding **Credit Card Internal ID** from the drop-down box.
  - d. Enter the **Credit Card Merchant Number**provided by the service provider.
  - e. Set the Minimum Authorized Value to 0.
  - **f.** Select the **Commission department** from the drop-down list and update the **commission rate** in percentage.
  - g. Select the **Debit Card No Commission charge**checkbox if a commission is not applicable to the debit card.
- 5. In the **Department Security** access, select the appropriate security level from the drop-down box.
- 6. Select the **Payment Type** under the Payment Department Type, either Both Credit and Debit card, Credit card or Debit card.



Click OK to save.

# Receipt Setup

A receipt can be generated upon payment and this requires a report template to be set up. A Standard Credit Card receipt template is available in **Administration module**, **System Setup**, **Receipts Group**. Please contact Oracle Hospitality Cruise Support if you would like to configure a customized receipt format.

# **Transaction Services Installation**

In order to have the program to work seamlessly and as a standard installation, a Web Services installation is required. Download the latest *Installation Guide* from the Oracle Help Center and follow the steps to install.

# Registering a Credit Card

The Generic Credit Card handling has two operating modes: **Attended** and **Unattended**. The Unattended Mode offers user a payment solution in an un-managed environment such as kiosk, self-service outlets. The Attended Mode requires user intervention. Registration of credit cards in both modes is performed through a Web Service function.

## **Registering Credit Card in Attended Mode**

The Attended Mode is a direct sales mode that registers a card, performs the sale transaction, and deactivates the card after the sale transaction is complete and at the same time, inserts the card details into the account as *Inactive*. A board card or cruise card is required in order to process the sales transaction and a re-registration of the card if the guest decides to use the same card for settlement at a later time.

#### Viewing an Authorization Amount in Management module for Attended mode

- Log in to the Management module and navigate to the Guest Handling screen.
- In the Search Panel, browse for the guest account and navigate to the Credit Card tab in the guest account. The registered card should be in an *Inactive* mode.
- To display the initial authorization, select the credit card and click CView Authorization in the middle section of the screen.
- 4. Navigate to the **Invoice tab** to view the sale transaction of the credit card. The amount is credited automatically onto the invoice if the card is a Debit Card.

Figure 2-2 Authorization Display on Invoice — Credit Card


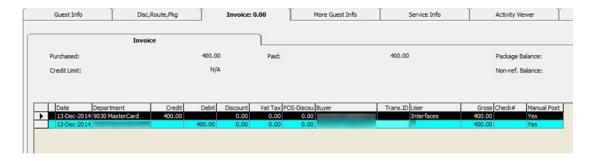




Figure 2-3 Management Authorization Display on Invoice — Debit Card




### **Registering Credit Card in Unattended Mode**

The Unattended mode registers the card as Active in the guest account and post sa credit if the registered card is a debit card. A board card or cruise card is required for payment card registration.

# Viewing an Authorization Amount in Management module for Unattended Mode.

- 1. Log in to the **Management module** and navigate to the **Guest Handling** screen.
- In the Search Panel, browse for the guest account and navigate to the Credit card tab in the Guest account.

Figure 2-4 Management Authorization View

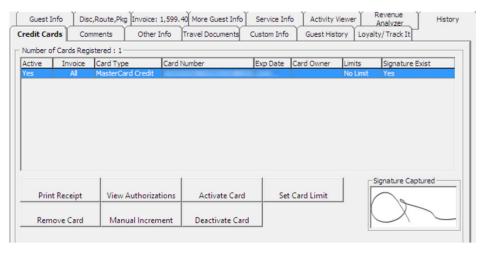

3. Select the registered credit/debit card and click **View Authorizations** to display the Initial Authorization.



ŏ Manual Credit Card Authorization Authorizations Details Authorizations Payment Type Card Number Value Status Type Number: 1 Pending Value: 0.00 Declined Value: 0.00 Authorized Value: 400.00 Authorization Retry instead of force authorization Value: Add Authorize Dedine Authorizatio

Figure 2-5 Management Initial Authorization View

#### **Credit Card Transfer Interface**

The Credit Card Interface has several functions enabled for Generic Card Transfer handling through the Credit Card Batch Authorization. Refer to the following table:

Table 2-4 Credit Card Transfer Interface Functions


# Authorization Settlement Test File New Authorization File Read Authorization File Manual Authorization File Settlement Read Settlement File Read Settlement File

# Creating Incremental / Top up Authorization File

1. Start the Credit Card Transfer Interface, select the Authorization menu, and select the New Authorization File from the drop-down menu.




Figure 2-6 Credit Card Transfer — Authorization Tab




In the Cruise Credit Card Authorization Write screen, a list of credit cards requiring incremental authorization appear in the grid. Use the Selection Criteria to filter the desired information.

Figure 2-7 New Authorization Screen

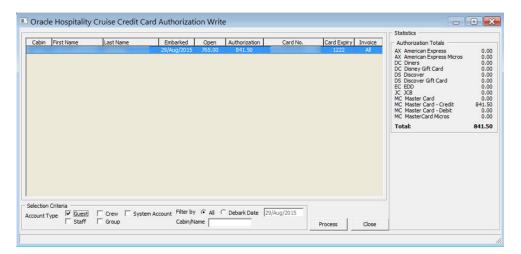

3. Click the **Process** button to generate the Authorization file. After the file generation completes, the location of the saved file is indicated on the screen.

Figure 2-8 Authorization File Location

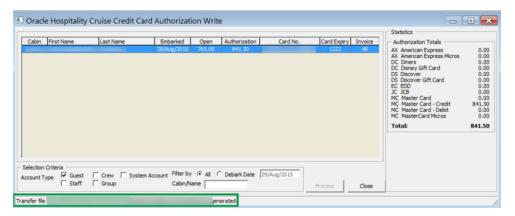

4. In the **Management module**, **Guest Handling** function, select the guest account and navigate to the **Credit Card tab**. Click **View Authorization** to open the

**Authorization** screen. The status of the transaction pending authorization is reflected as: Outstanding.

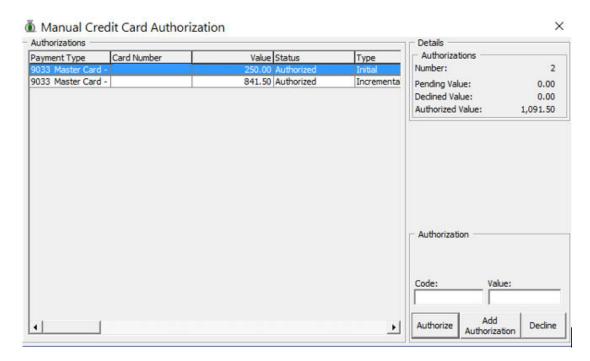


Figure 2-9 Management — Authorization Screen Manual

# Reading Authorization File

After the Merchant/Service Provider processes the authorization request, a response file with authorization codes is returned. You must update the authorization codes into the guest account using the Read Authorization function.

- 1. Repeat step 1 of *Creating Incremental/Top Up Authorization File* and select **Read Authorization File** from the drop-down menu.
- At the Cruise Credit Card Authorization Read screen, click Open File and search for the response file provided by the merchant, for example, the file name is XXXXXX.pcr
- Click Process to process the response transactions. A progress status is shown on the screen.
- 4. Navigate to the **Management module, Guest Handling** function, locate the guest account, and navigate to **Credit Card** tab.
- Click the View Authorization button to view. The authorized transaction status 'Authorized'.



Manual Credit Card Authorization X Authorizations Details Authorizations Туре Value Status Payment Type Card Number 2 Number: 9033 Master Card -841.50 Authorized Incrementa Pending Value: 0.00 Declined Value: 0.00 Authorized Value: 1.091.50 Add Authorize Decline Authorization


Figure 2-10 Management — Authorization Screen Manual

# **Obtaining Manual Authorization**

A manual authorization is available on an ad hoc basis and is performed within the guest account.

- 1. In the Management module, Guest Handling function, select the guest account.
- 2. Navigate to the Credit Card tab and click View Authorization.
- 3. In the Authorization screen, select **Add Authorization**.
- 4. Enter the value and the authorization code in the Credit Card Authorization screen when prompted, and click **OK** to save. This sets the status to 'Authorized' in the Manual Authorization screen.

Figure 2-11 Management — Add Authorization Screen — Credit Card Authorization



**5.** The Authorized code and value is shown at Authorization section when selecting the manual authorized transaction.


Manual Credit Card Authorization × Authorizations Details Authorizations Value Status Payment Type Card Number Type 4 9033 Master Card -Number: 250.00 Authorized Initial 9033 Master Card 841 50 Authorize 0.00 Pending Value: 9033 Master Card -1,996.50 Forced Declined Value: 0.00 Authorized Value: 3,188.00 Authorization Value: Code: 0005 1996.50 Add Dedine Authorization


Figure 2-12 Manual Authorization Screen, Forced Status

# Creating Settlement File

At the end of an invoice settlement, the system writes the settlement into the Settlement file, to be processed in a batch.

- 1. In the Credit Card Transfer Interface program, select from the drop-down menu **Settlement**, then **New Settlement File**.
- Click the Process button to generate the Settlement File. After the Settlement file is created, the location of the saved file is shown on the screen.






#### **Reading Settlement File**

After the Merchant or Service Provider returns a Response File, you must upload the file and update the Settlement transactions status.



- 1. From the **Settlement** drop-down menu, select **Read Settlement File**.
- On the Cruise Credit Card Settlement Read screen, click the Open File button and locate the Settlement Response file.
- **3.** The status of the process is on the Settlement Read screen. Click the **Process** button to read and update the Settlement record.

Figure 2-14 Settlement Read Screen

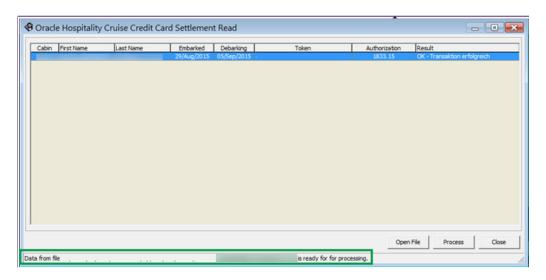

# Report

The credit card digits to print on reports depends on the setting defined in the **Number of Credit Card Front Digit to Display** parameter. This parameter only supports value from 0 - 6.

Below are the examples of the number of front digit to show on the report based on the value defined.

Figure 2-15 Reporting — Number of Front Digit to Appear in Report

'Number of Credit Card Front Digit to Display' = 0





## **Troubleshooting Section**

This section describes the troubleshooting steps for resolving some known issues encountered in Generic Credit Card handling.

Table 2-5 Tools Known Issue and Solution

Known Issue	Solution
Error — 'Key unable to upload'	Register PGPBBox7.dll with regsvr32.exe again.
Error — 'License Key has not been set'	Register PGPBBox7.dll with regsvr32.exe again.

### **Credit Card Transfer Interface**

Table 2-6 Credit Card Transfer Interface Known Issue and Solution

Known Issue	Solution
Credit Card Transfer does not reflect the correct desired credit card format	Check the credit card format setup in Administration module, System Setup, Database Parameter, Interfaces, Batch CCard Processing Format.

Table 2-7 Web Services Log

Parameter	Description
<guestsearch></guestsearch>	The program searches the guest details from the information obtained from the Credit Card device; all guests in the same cabin are also shown on the Credit Card device.
<getamount></getamount>	Credit Card device prompts to insert/swipe payment card and SPMS will determine the pre-authorization amount based on card information retrieved from Credit Card device.
	The Credit Card pre-authorization amount is based on the Online Initial Auth Amount parameter, and the debit card preauthorization amount is based on the Online Debit Initial Auth Amount parameter.
<updatecardinfo></updatecardinfo>	The SPMS obtain information provided by the merchant or service provider through the card device and inserts the token, status and modification date from the response into the card record and authorization record for Approved and Declined cards.
<addrouting></addrouting>	If the transaction is approved, the Credit Card device displays the other guest names of the same cabin for routing processing. SPMS updates the RES_QROUTE_ACC if routing is assigned through the device.



Table 2-7 (Cont.) Web Services Log

Parameter	Description
<tmltweet></tmltweet>	The function maintains the Credit Card device Keep Alive status. Additional information updates such as cruise currency, pending transaction depend on this function.
<gbcardregistration></gbcardregistration>	This parameter identifies whether the guest/ crew/system account is allowed to perform payment card registration or not. The value for the parameter is either true or false.
<gbrouting></gbrouting>	This parameter identifies whether the guest/ crew/system account is allowed or not to perform payment routing. The value for the parameter is either true or false.
<guestsearch></guestsearch>	The program searches the guest details from the information obtained from the Credit Card device; all guests in the same cabin are also shown on the Credit Card device.
<getamount></getamount>	The Credit Card device prompts to insert/swipe payment card, and SPMS determines the preauthorization amount based on card information retrieve from Credit Card device.
	The Credit card pre-authorization amount is based on the Online Initial Auth Amount parameter, and the debit card preauthorization amount is based on the Online Debit Initial Auth Amount parameter.
<updatecardinfo></updatecardinfo>	The SPMS obtain information provided by the merchant or service provider through the card device and inserts the token, status and modification date from the response into the card record and authorization record for Approved and Declined cards.
<addrouting></addrouting>	If the transaction is approved, the Credit Card device displays the other guest names of the same cabin for the routing process. SPMS updates the RES_QROUTE_ACC if routing is assigned through the device.
<tmltweet></tmltweet>	The function maintains the Credit Card device 'Keep Alive' status. Additional information update such as cruise currency, pending transaction depends on this function.
<gbcardregistration></gbcardregistration>	This parameter identifies whether the guest/ crew/system account is allowed to perform payment card registration. The value for the parameter is either true or false.



Table 2-7 (Cont.) Web Services Log

Parameter	Description
	This parameter identifies the guest/crew/ system account's last day of the cruise. The parameter is controlled by the 'General', 'Number of Before Disembarkation Days' parameter, and the value of the parameter is either true or false,
	for example:
<gblastday></gblastday>	If [Disembarkation date] - [Number of Before Disembarkation Days] = [System Date], then <gblastday> = true, else <gblastday> = false.</gblastday></gblastday>
<gbdebitrefund></gbdebitrefund>	This parameter identifies whether the guest/crew/system account is allowed to receive a refund the balance from their invoice account. The value for the parameter is either true or false.

# Generic Credit Card Mapping Fields

This section describes the field definition supported by the Generic Credit Card (OHCCreditCard) format.

#### **File Name Format**

The file naming format for Generic Credit Card is explained in in the following table, for example: GuestTransfer######.pci.

Table 2-8 Generic Credit Card File Format

Name	Description	
Guest	The first word of the file name is a representation of the Account Type based on the filter used to generate the authorization file.	
	Guest - GuestTransfer######.pci	
	Crew - CrewTransfer######.pci	
	Group - GroupTransfer######.pci	
	Staff - StaffTransfer######.pci	
	All filter - <blank>Transfer######.pci</blank>	
Transfer	The second word of the file name represents the type of transfer.	
	TestTransfer = test authorization file.	
	Transfer = Authorization transaction file.	
	Settle = Settlement transaction file.	
071020161138	The date/time format of the authorization file is	
	DDMMYYYYHHMM.	



Table 2-8 (Cont.) Generic Credit Card File Format

Name	Description
PCI or PCR	The file format extension of the authorization file:
	pci = request file
	pcr = response file

### **Request File Format**

The following table describes the field definitions for a Request File for Authorization and Settlement.

Table 2-9 Request File Format

Field	Туре	Size	Definition
Header			
Head	Varchar	4	Fixed value: "HEAD".
data-source	Varchar	30	File sender name, example "MV SHIP".
Date	Int	12	Format: YYMMDDHHMMSS, 111019130712.
file-number	Int	12	Counter for the file.
Version	Varchar	4	Version string of our batch file, example 1.0.
Batch Record			
MerchantID	Varchar	20	Merchant ID. For example: HOTEL.
Paytype	Varchar	10	"CC" - for VI, MC. "EDD" - for EC. "TO" - for if token with value.



Table 2-9 (Cont.) Request File Format

Field	Туре	Size	Definition
Trxtype	Varchar	12	tstauth incauth  capture refund
			tstauth: Test authorization, it is a mandatory authorization prior to generating an initial authorization.
			incauth: Incremental authorization increases amount of an existing authorization. Input has to be the total amount (initial+additional amount).
			capture: Book a pre- authorization. Capture amount has to be less than or equal to the authorized amount.
			refund: Refund an amount only valid for an existing order.
TransID	Varchar	50	Unique transaction identification number in ASCII. Does not support special characters.
TransID reference	Varchar	50	Reference to the original unique transaction where necessary. For example: capture, refund, incauth for an already existing transaction.
Amount	Int	9	Always in the smallest currency unit in cent for Euro and so on. For example 100 for 1 Euro.b Empty if Trxtype=register.



Table 2-9 (Cont.) Request File Format

Field	Туре	Size	Definition
Currency	Varchar	3	Currency code according to ISO 4217 for this transaction. For example; EUR, USD, or follow the Ship's currency.
Description	Varchar	27	Note to payee in text for EDD Debit Card or other Payment Method.
AppCodeTel	Int	6	Special authorization code obtained manually through telephone for an authorization from an acquirer.
Customer	Varchar	27	Customer name.
CD anatomorid	Versler.	10	Customer ID in Customer Relationship Management System
CD_customerid	Varchar	16	(CRM).
CD_customertype	Varchar	12	Type of customer, For example: crew, passenger, staff and others.
CD_orderid	Varchar	16	Unique order-id.
CD_paxid	Varchar	16	Customer unique ID.
CD_cruiseid	Varchar	10	Travel number.
CD_accountid	Varchar	12	On-board account number.
CD_roomid	Varchar	6	Cabin number
CD_invoiceid	Varchar	12	Account number
Reference	Varchar	30	Additional reference.
Token	Varchar	30-40	Universally unique identifier (UUID). For example: ed4bdf30-4ac4-102f-991a-000bcd838e00. Reference for a payment account, either from preregistration (manifest) or from earlier batch reply. Token usage is mandatory.



Table 2-9 (Cont.) Request File Format

Field	Туре	Size	Definition
CC_brand Varchar	Varchar	10	Credit card brand MasterCard, VISA, AMEX, DC, JCB.
CC_cardowner	Varchar	27	Card owner.
EDD_accountowner	Varchar	27	Bank account owner.
Track1enc	Varchar	256	For future use.
Track2enc	Varchar	256	For future use.
Track3enc	Varchar	256	For future use.
KSN	Varchar	32	For future use.
Device	Varchar	32	For future use.
Batch Footer			
Foot	Varchar	4	Fixed value: "FOOT".
Counter	Int	9	Total number of records.

Table 2-10 Response File Format

Field	Туре	Size	Definition
Head	Varchar	4	Fixed value: "HEAD".
data-source	Varchar	30	File sender name, example "MV SHIP".
Date	Int	12	Format: YYMMDDHHMMSS, 111019130712.
file-number	Int	12	Counter for the file.
Version	Varchar	4	Version string of our batch file, example 1.0.
Response Record			
TransID	Varchar	50	Unique transaction ID.
Token	Varchar	40	UUID for this payment account. Only if the payment account (credit card or EDD) is valid.
Return-code	Varchar	10	00000000 (8 zeros for OK)
			NNNNNN (for Error, ex. 23055310).
Status	Varchar	10	Textual representation of return code, "OK", "Error".
Description	Varchar	255	Description for Status.

Table 2-10 (Cont.) Response File Format

Field	Туре	Size	Definition
Reference	Varchar	30	Additional reference. Same as input parameter.
CD_customerid	Varchar	16	Customer number from CRM.
Approvalcode	Int	6	Approval-code for this transaction.
EPAref	Int	9	EPA-Reference for this transaction, only used for Accounting.
auth_time	Varchar	20	Server time stamp for the single transaction, format YYYY-MM- DDTHH:MM:SS as UTC Time.
Footer			
Foot	Varchar	4	Fixed value: "FOOT".
Counter	Int	9	Total number of records.

## Sample BIN Range

Below are the sample eligible BIN range for Generic Credit Card. 400626,400626,DEL,Visa Debit,16 480240,480240,DEL,Visa Debit,16 407704,407705,DEL,Visa Debit,16 407704,407705,DEL,Visa Debit,16 408367,408367,DEL,Visa Debit,16 484412,484412,DEL,Visa Debit,16 409400,409402,DEL,Visa Debit,16 484415,484417,DEL,Visa Debit,16 412285,412286,DEL,Visa Debit,16 484427,484427,DEL,Visa Debit,16 413733,413737,DEL,Visa Debit,16 490960,490979,DEL,Visa Debit,16 413787,413788,DEL,Visa Debit,16 492181,492182,DEL,Visa Debit,16 418760,418760,DEL,Visa Debit,16 495065,495065,DEL,Visa Debit,16 419176,419179,DEL,Visa Debit,16 495090,495094,DEL,Visa Debit,16 419772,419772,DEL,Visa Debit,16 498824,498824,DEL,Visa Debit,16 420672,420672,DEL,Visa Debit,16 499844,499846,DEL,Visa Debit,16 446213,446254,DEL,Visa Debit,16 499902,499902,DEL,Visa Debit,16 446257,446272,DEL,Visa Debit,16 400115,400115,ELC,Visa Electron,16 446274,446283,DEL,Visa Debit,16 400837,400839,ELC,Visa Electron,16 446286,446286,DEL,Visa Debit,16 412921,412923,ELC,Visa Electron,16



450875,450875,DEL,Visa Debit,16 424962,424963,ELC,Visa Electron,16 453978,453979,DEL,Visa Debit,16 444000,444000,ELC,Visa Electron,16 454313,454313,DEL,Visa Debit,16 484406,484408,ELC,Visa Electron,16 456705,456706,DEL,Visa Debit,16 484411,484411,ELC,Visa Electron,16 456725,456745,DEL,Visa Debit,16 484418,484426,ELC,Visa Electron,16 458046,458046,DEL,Visa Debit,16 484428,484455,ELC,Visa Electron,16 460024,460024,DEL,Visa Debit,16 491730,491759,ELC,Visa Electron,16 465830,465879,DEL,Visa Debit,16 499806,499806,ELC,Visa Electron,16 465901,465950,DEL,Visa Debit,16 512499,512499,MCD,MasterCard Debit,16 474503,474503,DEL,Visa Debit,16 512746,512746,MCD,MasterCard Debit,16 475110,475159,DEL,Visa Debit,16 535420,535819,MCD,MasterCard Debit,16 475183,475183,DEL,Visa Debit,16 537210,537609,MCD,MasterCard Debit,16 476220,476269,DEL,Visa Debit,16 557347,557496,MCD,MasterCard Debit,16 476340,476389,DEL,Visa Debit,16 545721,545723,MCD,MasterCard Debit,16



# Ingenico Format

The following sections describe the setup and usage of Online Credit Card Transfer for the INGENICO handling.

### Prerequisite, Supported Systems, and Compatibility

This section describes the minimum requirements for using the Ingenico handling.

#### **Prerequisite**

- OHC Ship Transf.exe
- OHC Tools.exe version
- Wrapper.dll version
- SPMS Parameters
- Web Services Installation
- CRUFLFC.dll version

### **Supported Credit Card Device**

Please contact your local provider on the device supported and the installation instructions.

### Compatibility

SPMS version 20.2 or later. For customer operating on version below 20.2, a database upgrade to the recommended or latest version is required.

## **SPMS Parameters Ingenico**

This section describes the parameters available to INGENICO Online Credit Card module. They are accessible from the **Administration module**, **System Setup**, **Parameter** function.

#### PAR\_GROUP General

Table 3-1 PAR Group General

PAR Name	PAR Value	Description
Enable Signature Capture for Credit Card	0 or 1	<ul><li>0 - Disables Signature Capture for Credit Card.</li><li>1 - Enables Signature Capture for Credit Card.</li></ul>
Number of day before debarkation	2	Specifies the number of days before guest disembarkation date to swipe the exact amount for debit/credit card in online mode.



Table 3-1 (Cont.) PAR Group General

PAR Name	PAR Value	Description
Allow payment for Declined Authorization	1	0 - Does not allow payment if authorization is declined but allow when offline.
		1 - Allows payment if authorization is decline or offline.
		2 - Does not allow payment if authorization is decline or offline.
Allow posting for declined authorization	1	0 - Does not allow posting if credit card authorization is declined.
		1 - Allows posting.
Online Initial Auth Amount	<amount></amount>	Defines the initial authorization amount for all card types when card is swiped at the terminal in online mode.
Online Debit Initial Auth Amount	10,20,30,40	Defines four amounts for the debit card initial authorization amount.
Allow Settlement Voiding	1	0 - Allows voiding, no message will be prompted.
		1 - Allows voiding, message will be prompted.
		2 - Does not allow voiding.
Number of hour after embark date to block card	<hours></hours>	Defines the number of hours after embarkation date to block cruise card/disable posting.
Number of Credit Card Front Digit to Display	<value></value>	Defines the number of credit card front digit visible in the credit card report. Value 0 to 6.

### PAR\_GROUP Ingenico

Table 3-2 PAR Group Ingenico

PAR Name	PAR Value	Description
		0 - Disables the change of payment department after card is deactivated.
Enable Change Payment Department	0	1 - Enables a change of payment department after card is deactivated.
Amount for Online top up	<amount></amount>	Defines the top up amount to define to send in online/offline mode.
Fixed Amount to add to top up amount	<amount></amount>	Defines the fixed amount to add to the top up value.
Posting amount to reject if auth declined/offline	<amount></amount>	Does not allow posting if posting amount are more than parameter defined amount AND authorization is decline or offline.
Credit Amount Not Allowed to Exceed	<amount></amount>	Specifies the credit posting amount not allowed to add if credit is greater than debit value and credit greater than new parameter value. Default value = 0.

### PAR\_GROUP Not Specified



Table 3-3 PAR\_GROUP Not Specified

PAR Name	PAR Value	Description
CC Transfer Format	OHCCreditCard	Specifies the message format to be generated by Credit Card Transfer.
CCard Interface Name	<workstation ip="" name=""></workstation>	Workstation IP address/name that runs OHC Ship Transfer.

## System Configuration Ingenico

This section describes the various system code setups used by Ingenico Handling. The function is available in the **Administration module**.

#### **Department Setup**

You must configure a debit and credit department code for each credit card type accepted by the ship in order for charging and posting to take place.

### **Credit/Debit Card Department Code Setup**

- 1. Log in to the **Administration module** and select **Financial Setup, Department setup** from the drop-down list.
- 2. Click the **New** button to create a **Sub-Department** code.



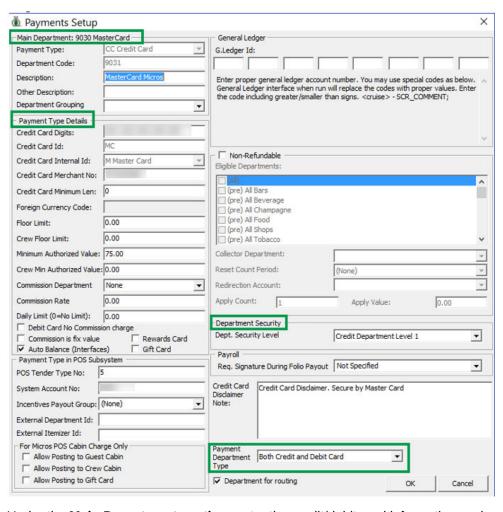


Figure 3-1 Department Code Setup

- 3. Under the **Main Department section**, enter the credit/debit card information such as Payment Type, Department Code, and Description.
- 4. In the **Payment Type Details** section:
  - Enter the first two digits of the first set of the credit card number in the Credit Card digits field.
  - Enter the Credit Card ID, for example, MC MasterCard, VI Visa, and others
  - Select the corresponding Credit Card Internal ID from the drop-down list.
  - Enter the Credit Card Merchant Number provided by the Service Provider.
  - Select the Commission department from the drop-down list and update the commission rate in percentage.
  - Select the **Debit Card No Commission** charge if the commission is not applicable to debit card.
- 5. In the **Department Security** access section, select the appropriate security level from the drop-down list.



- Select the Payment Type under Payment Department Type, either Both Credit and Debit card, Credit card or Debit card. This field determines whether the payment type is a Credit Card or Debit Card.
- 7. Click OK to save.

### Merchant Setup

A merchant credential is required for credit card authorizations and payments to be handled efficiently. Prior to setting up the Merchant's credentials, the following information must be ready:

- Pre-configured Credit Card type
- · Currency code exist in currency table
- Merchant information from service provider

### **Merchant Credentials**

- Log in to the Administration module and select Financial Setup, Credit Card Merchant Setup from the drop-down list.
- 2. Right-click and select **Add New** to open a new screen.

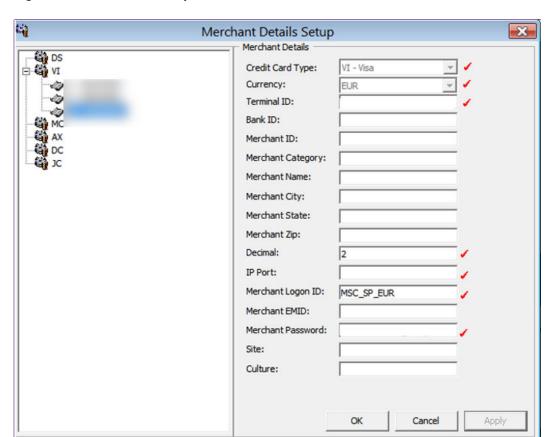


Figure 3-2 Merchant Setup

3. Fill in the following fields correctly:



- a. Credit Card type
- b. Currency
- c. Terminal IF
- d. Decimal
- e. IP port
- f. Merchant Logon ID
- q. Merchant Password
- 4. Click **OK** to save.
- **5.** Repeat steps 1 to 5 for other credit card types accepted by the Merchant.

#### **Receipt Setup**

A receipt can be generated upon payment and this requires setting up a report template. A Standard Credit Card receipt template is available in **Administration module**, **System Setup**, **Report setup**, **Receipts group**. Contact Oracle Hospitality Cruise Support if you want to configure a customized receipt format.

### **Credit Card BIN Import**

In order for the program to recognize the correct card type (Credit/Debit) and its handling, you must import a Credit Card Bank Identification Number (BIN) file provided by ELAVON to SPMS periodically. This file contains the complete set of eligible BINs and information from the previously loaded BIN file is overwritten during the reload process.

#### BIN file loading

- Log in to the Administration module and select Financial Setup, Import Credit Card Bin file.
- 2. Locate and select the latest BIN file from the folder, and click **Open**. For more information about the BIN format, see *Sample BIN Ranges*.
- 3. The BIN file Information populates in the Credit Card BIN Import screen. Click the Import to save the BIN ranges into the BIN table. Table 3–4 Card Type Category in BIN Table describes the card categories in the BIN file:

Table 3-4 Card Type Category in BIN Table

BIN-ISDEBIT	Description
0	Credit Card
1	Debit Card
2	Combo Card

4. Click Close to exit.

### **Transaction Services Installation**

As a standard installation, a Transaction Services installation is required. To install the **TransactionsServices**, consult the SPMS Installation Guide.



## Ingenico OHC Ship Transfer

The OHC Ship Transfer is an interface program that sends the batch authorization from SPMS to the Ingenico Payment Gateway at a scheduled time for credit card payments to be authorized.

### Setting up OHC Ship Transfer

- 1. Start OHC Ship Transf.exe and navigate to Settings tab.
- 2. Under the **Remote Server** section, insert the following URLs obtained from the respective payment gateway provider in the respective field:
  - Payment gateway URL / Web service URL
  - Batch Payment gateway URL / Batch Web service URL
- To set an Auto Scheduler for batch authorizations to be sent daily at a scheduled time, select the Auto Scheduler and set the desire time.

Figure 3-3 OHC Ship Transfer Scheduler



- 4. This function is only applicable to the Ingenico Online Credit Card format batch authorization. For Batch Settlement, these are performed in Management/Crew, Credit Card Batch Settlement function.
- 5. The above settings are saved in OHCSettings. Par under the following tag:




Table 3-5 OHCSettings.Par

Field Name	Description
[#ShipTransf.Connection.AutoScheduler= 1#]	Indicates whether the Auto Scheduler is turn on/off (1 = on, 0 = Off).
[#ShipTransf.Connection.AutoScheduler Time=23:30#]	Indicates the time set in Auto Scheduler.
[#ShipTransf.Connection.last Date Auto Authorization=20150307000000#]	Indicates the last sent date/time of the batch top up. The saved date/time format is YYYMMDDHHMMSS

# Checking Amount Authorized in Management module

- 1. Log in to the **Management** module and navigate to the **Guest Handling** screen.
- 2. In the **Search Panel**, browse for the guest account.
- 3. Navigate to the Credit Cards tab in the Guest account.

Figure 3-4 Management Authorization View Screen

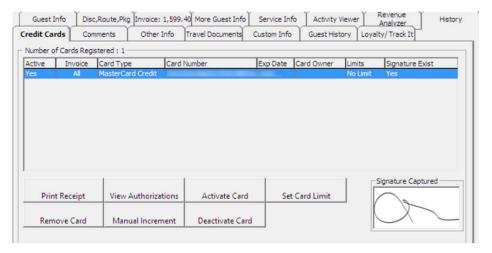

 Select the registered credit/debit card and click View Authorizations to display Initial Authorization.



Manual Credit Card Authorization ŏ Authorizations Details Authorizations Payment Type Card Number Value Status Number: 1 Pending Value: 0.00 Declined Value: 0.00 Authorized Value: 400.00 Authorization Retry instead of force authorization

Figure 3-5 Management Initial Authorization View Screen

### **Processing Credit Card Batch**

The batch function sends authorization requests and settlement by batch to Ingenico for processing. This function requires parameters, **Not Specified, CC Transfer Format** set as **"INGENICO"**. These functions are only permissible to users with assigned security rights. See *User Security Group* for access rights for details. Both functions are available in the Management and the Crew module.

- Management, Cashier, Credit Card Batch Authorization/ Credit Card Batch Settlement.
- Crew, Quick Functions, Credit.

## **Generating Batch Authorization**

The Credit Card Batch Authorization function sends authorization requests of credit/debit cards marked with 'Online top up amount' by batch to Ingenico through the Ship Transfer interface.

- Log in to the Management module.
- Select Credit Card Batch Authorization from the menu-item to open the Batch Authorization Handling screen. The Batch Authorization Handling screen includes four tabs.

Table 3-6 Batch Authorization Screen

Tab Name	Description
Outstanding Authorizations	Authorizations request yet to be process.
Pending Authorizations	Authorizations request pending approval from service provider.
Declined Authorizations	Authorizations request declined by service provider.



Table 3-6 (Cont.) Batch Authorization Screen

Tab Name	Description
Approved Authorizations	Authorization request approved by service provider.

3. To process the batch, select the desire tab and click **Process**. A progress bar is shown on the screen indicating the batch progress.

Figure 3-6 Management, Batch Authorization — Outstanding Authorization Tab


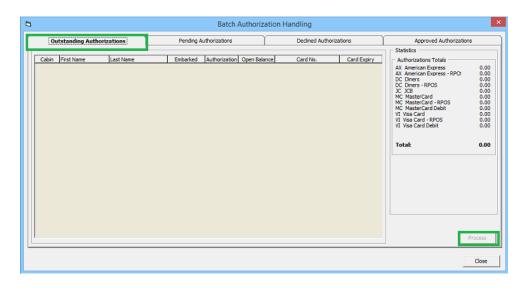


Figure 3-7 Management, Batch Authorization — Outstanding Authorization Tab




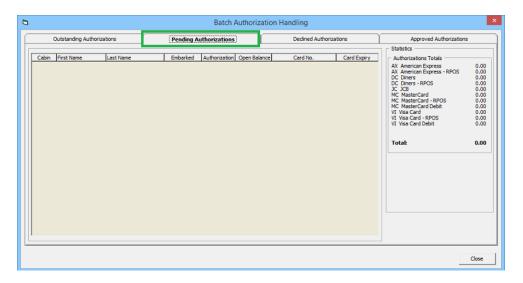

Batch Authorization Handling Outstanding Authorizations Pending Authorizations **Declined Authorizations** Approved Authorizations Statistics Cabin First Name Embarked Authorization Open Balance Card Expiry Last Name Card No. Authorizations Totals Authorizations Totals
AX. American Express
AX. American Express - RPOS
DC Diners
DC Diners - RPOS
JC JOB
MC MasterCard
MC MasterCard Gebit
VI Visa Card
VI Visa Card
VI Visa Card - RPOS
VI Visa Card - RPOS Total: 0.00 Close

Figure 3-8 Management, Batch Authorization — Declined Authorization Tab

Figure 3-9 Management, Batch Authorization — Approved Authorization Tab



4. Information is passed to the OHC Ship Transfer to request authorization from Ingenico. The status of the batch authorization is reflected in the OHC Ship Transfer Message tab in the following example:

Figure 3-10 OHC Ship Transfer Messages

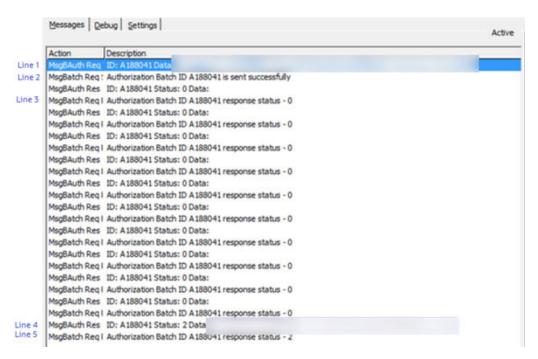


Table 3-7 OHC Ship Transfer Message Description

Message Line	Authorization Status
Line 1	Batch authorization requested to service provider.
Line 2	Batch authorization request is successful, can start sending batch authorization data.
Line 3	Batch authorization data sent successfully to service provider.
Line 4	Batch authorization data send completed, and now awaiting response from service provider.
Line 5	Batch authorization response from service provider.

## **Generating Batch Settlement**

The Batch Settlement Handling screen includes four tabs as follows:


- Outstanding Settlements: Settlement request yet to be process.
- Pending Settlements: Settlement request pending approval from services provider.
- Declined Settlements: Settlement request declined by service provider.
- Approved Settlements: Settlement request approved by service provider.


To generate a batch settlement,



- From the menu-item, select Credit Card Batch Settlement to open the Batch Settlement Handling screen.
- 2. Select the desire tab and click **Progress**. A progress bar appears on the screen indicating the batch progress.

Figure 3-11 Management, Batch Settlement — Outstanding Settlement Tab

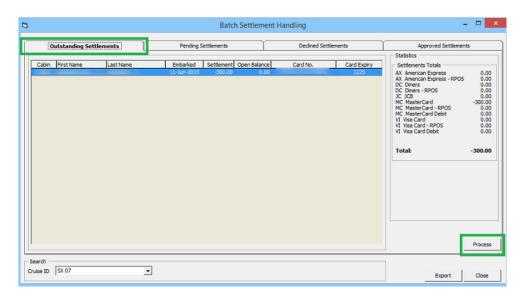

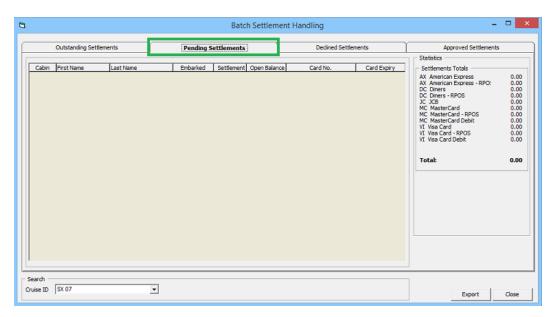


In the Declined tab, declined settlement transactions are listed. Click the Retry button to resubmit the declined settlement transaction for approval.

| Cabin | First Name | Last Name | Embarked | Settlement | Open Balance | Card No. | Card Expry | 120 | 11-3un-2015 | 758.00 | 0.00 | 1225 | 703 | 11-3un-2015 | 759.00 | 0.00 | 1225 | 7062 | 11-3un-2015 | 657.00 | 0.00 | 1225 | 7062 | 11-3un-2015 | 657.00 | 0.00 | 1225 | 7062 | 11-3un-2015 | 657.00 | 0.00 | 1229 | 7062 | 11-3un-2015 | 657.00 | 0.00 | 1229 | 7062 | 11-3un-2015 | 657.00 | 0.00 | 1229 | 7062 | 11-3un-2015 | 657.00 | 0.00 | 1229 | 7062 | 11-3un-2015 | 657.00 | 0.00 | 1229 | 7062 | 11-3un-2015 | 657.00 | 0.00 | 1229 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062 | 7062

Figure 3-12 Management, Batch Settlement — Declined Settlement Tab

Figure 3-13 Management, Batch Settlement — Approved Settlement Tab/ Progress Bar

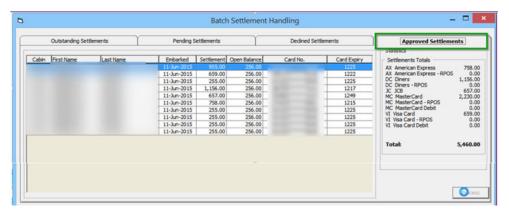

4. Information is passed to Ship Transfer to request a settlement process from Ingenico. The status of the batch settlements is reflected in the Ship Transfer's Message tab and illustrated in the following examples:



Messages Debug Settings Action Description MsgInit Connected Internal with on remote port was established. MsgRcv PingFrom \* MsgStop Internal connection with remote computer was terminated. MsgBSettle Rec ID: Data: D Line A MsgBatch Reg : Settlement Batch ID : is sent successfully MsgBSettle Res ID: Status: 0 Data: MsgBatch Req | Settlement Batch ID response status - 0 MsgBSettle Res ID: Status: 0 Data: Line C MsgBatch Req | Settlement Batch ID response status - 0 = MsgBSettle Res ID: Status: 0 Data: MsgBatch Req I Settlement Batch ID response status - 0 MsgBSettle Res ID: Status: 0 Data: MsgBatch Req | Settlement Batch ID response status - 0 MsgBSettle Res ID: \_\_\_\_\_ Status: 0 Data: MsgBatch Req | Settlement Batch ID response status - 0 MsgBSettle Res ID: Status: 0 Data: MsgBatch Req | Settlement Batch ID response status - 0 Line D MsgBSettle Res ID: Status: 2 Data: D, MsgBatch Req | Settlement Batch ID response status - 2-▶ Line F

Figure 3-14 OHC Ship Transfer Message

Table 3-8 OHC Ship Transfer Message Description

Message Line	Authorization Status
Line A	Batch Settlement Request sent (Positive / Negative/Refund amount).
Line B	Batch Settlement sent successfully.
Line C	Await response from service provider.
Line D	Response from service provider (Positive / Negative/Refund amount).
Line E	Response updates statuses.
	0 - Not Processed; 1 - Processing; 2 - Processed; 3 - Error.


### Setting up a Report

In order to meet Payment Application Data Security Standard (PA-DSS) requirements, all credit card numbers printed must be masked. This is accomplished using **Number of Credit Card Front Digit to Display** parameter to handle the number of digits to be displayed on the report. You can only enter a value ranging from zero to six in this parameter. Any value outside this range will receive an error.

The total front digit of the card number to display in the report is subject to the value defined in the **Number of Credit Card Front Digit to Display** parameter. See the following examples:



Figure 3-15 Number of Credit Card Front Digit to Display

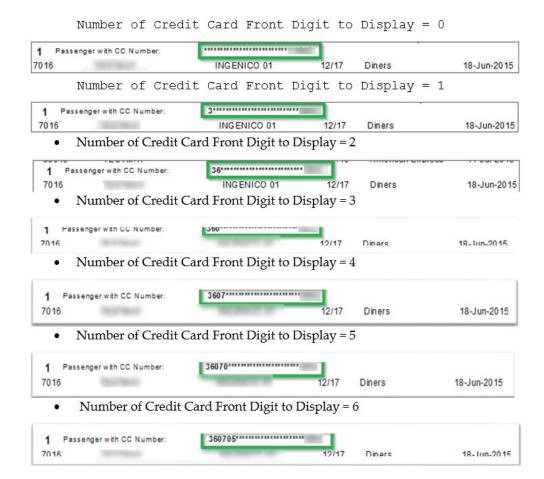

### **Troubleshooting Ingenico**

This section describes the troubleshooting steps that will assist you in resolving the known errors with Ingenico handling.

Table 3-9 Ship Transfer Interface Known Issue and Solution

Known Issue	Solution
OHC Ship Transfer program opens/closes itself	Ensure you are using latest wrapper.dll. Version 5.0.0.001 or later.
MsgErr <ht> Logon ID is Missing</ht>	Register the Wrapper.dll with regasm.exe
MsgErr <ht> Logon ID is Missing</ht>	Ensure the Logon and Password is configured in the merchant setup.



Table 3-10 Ingenico ISC480 Device Known Issue and Solution

Known Issue	Solution	
Error code : [1001]	Ensure the App_code.dll or OHCSPMSData.dll, OHCSPMSBusiness.dll, OHCSPMSMobile.dll, OHCSPMSUI.dll is of the same version in current SPMS Web Server in OHCWebservices, Bin folder.	
Error code : [1003]	Ensure the Webserver IP address, port number is configured correctly in the device.	
Error code : [3103]	Ensure the Web Server is connected to database defined in web.config file.	
	To check the connection between webserver and database.	
	Browsehttp:// <web hostname="" server="">/ OHCWebServices/IngenicoService.asmx? op=GuestSearch</web>	
	Key in the Terminal ID.	
	Key in guest's board card string.	
	Click Invoke.	
	Guest information populates if the connection between webserver and database is active.	

Table 3-11 Web Services Log

Parameter	Description
	Ingenico device will prompt to swipe board card screen.
<guestsearch></guestsearch>	SPMS will search guest details from the information retrieved (board card swiped through Ingenico device) from Ingenico device; all guests in same cabin will display in Ingenico device as well.
<getamount></getamount>	Ingenico device will prompt to insert/swipe payment card.
	SPMS will determine the card information retrieve from Ingenico device for the preauthorization amount.
	Credit card pre-authorization amount is based on parameter > 'Online Initial Auth Amount'.
	Debit card pre-authorization amount is based on parameter > 'Online Debit Initial Auth Amount'.
<updatecardinfo></updatecardinfo>	Ingenico device will get the transaction status from the merchant/service provider and response to SPMS.
	SPMS will insert the response into database and Authorization the status retrieves from response file (Approved/Declined).



Table 3-11 (Cont.) Web Services Log

Parameter	Description
<addrouting></addrouting>	If the transaction is approved, Ingenico device will display the other guest names of the same cabin for routing process.
	SPMS will update the RES_QROUTE_ACC if routing assign in the device.
<tmltweet></tmltweet>	This parameter is to keep the Ingenico device connection alive.
	Additional information like cruise currency, pending transaction will be determined by this function.
<gbcardregistration></gbcardregistration>	This parameter identifies the guest/crew/ system account allowed to perform payment card registration or not.
	The value for the parameter is true or false.
<gbrounting></gbrounting>	This parameter identifies the guest/crew/ system account allowed to perform payment routing or not.
	The value for the parameter is true or false.
<gblastday></gblastday>	This parameter identifies the guest/crew/ system account's last day of the cruise.
	This parameter is controlled by system parameter [Parameter > General > 'Number of Before Disembarkation Days']
	The value for the parameter is true or false.
	For example
	If [Disembarkation date] - [Number of Before Disembarkation Days] = [System Date], then <gblastday> = true, else <gblastday> = false</gblastday></gblastday>
<gbdebitrefund></gbdebitrefund>	This parameter identifies the guest/crew/ system account allowed to refund the balance from their invoice account.
	The value for the parameter is true or false

Table 3-12 Transaction Status

Status	Description
Initial Authorization	
CCA_OPERATION	1
CCA_MTYPE	0 (Online initial auth), 1 (Offline initial auth).
CCA_PREVIOUS	Original pre-authorization reference ID, value retrieve from parameter 'CC Ship' at (CCA_GROUP= 'Not Specified' + sequence CNT_POS_RES).
CCA_STATUS	0 (outstanding/pending), 1 (approved), 2 (declined).



Table 3-12 (Cont.) Transaction Status

Status	Description	
CCA_QSTATUS	0 (pending), 8 (completed).	
CCA_STATUS = 0	It means pseudo/temporary token is	
CCA_QSTATUS = 8	received and waiting for real token after connection with merchant/service provider is resume.	
Incremental Authorization		
CCA_OPERATION	2	
CCA_MTYPE	4 (Online incremental auth), 5 (offline incremental auth)	
	If CCA_MTYPE = 5	
	<ul> <li>When parameter 'Allow Posting For Declined Authorization' is set to 0. For incremental authorization created during system cruise change.</li> <li>When parameter 'Allow Payment For Declined Authorization' is set to 0 or 2.</li> </ul>	
	For incremental authorization created during pay invoice/quick billing.	
CCA_FILENO	File number being assigned when create batch authorization.	
CCA_FSTATUS	Batch file processing status	
	0 (pending), 1 (processing and waiting for response), 2 (processed done), 3 (error).	
Settlement		
CCT_STATUS	0 (outstanding), 1 (approved), 2 (declined)	
CCT_QSTATUS	0 (pending), 2 (when 'Process' is clicked on OHC Management > Credit Card Batch Settlement), 8 (Completed)	
CCT_FILENO	File number being assigned when create batch settlement	
CCT_FSTATUS	Batch file processing status	
	0 (pending), 1 (processing and waiting for response), 2 (completed), 3 (error)	
Direct Payment		
CCA_MTYPE	6	
CCA_STATUS	1 (approved), 2 (declined).	
No Settlement created		

# **Appendices**

### **User Security Group**

The following User Access Rights must be granted to users performing Batch Authorization/ Settlements.



**Table 3-13 User Security Group** 

User Group No	Security Reference No	Description
Management\Menu\Cashier	4596	Credit Card Batch Authorization.
Management\Menu\Cashier	4511	Credit Card Batch Settlement.
Crew\Menu\Quick Functions	4598	Credit Card Batch Authorization.
Crew\Menu\Quick Functions	4597	Credit Card Batch Settlement.

### Sample BIN Ranges Ingenico

The following are sample eligible BIN ranges for Ingenico:

400626,400626,DEL,Visa Debit,16 480240,480240,DEL,Visa Debit,16 407704,407705,DEL,Visa Debit,16 484409,484410,DEL,Visa Debit,16 408367,408367,DEL,Visa Debit,16 495067,495067,DEL,Visa Debit,16 419772,419772,DEL,Visa Debit,16 495090,495094,DEL,Visa Debit,16 420672,420672,DEL,Visa Debit,16 419773,419776,ELC,Visa Electron,16 445190,445192,DEL,Visa Debit,16 424519,424519,ELC,Visa Electron,16 446200,446211,DEL,Visa Debit,16 424962,424963,ELC,Visa Electron,16 446213,446254,DEL,Visa Debit,16 444000,444000,ELC,Visa Electron,16 446257,446272,DEL,Visa Debit,16 484406,484408,ELC,Visa Electron,16 446274,446283,DEL,Visa Debit,16 484428,484455,ELC,Visa Electron,16 446286,446286,DEL,Visa Debit,16 491730,491759,ELC,Visa Electron,16 460024,460024,DEL,Visa Debit,16 499806,499806,ELC,Visa Electron,16 465830,465879,DEL,Visa Debit,16 512499,512499,MCD,MasterCard Debit,16 465901,465950,DEL,Visa Debit,16 512746,512746,MCD,MasterCard Debit,16 474503,474503,DEL,Visa Debit,16 516001,516001,MCD,MasterCard Debit,16 474551,474551,DEL,Visa Debit,16 516730,516979,MCD,MasterCard Debit,16 475110,475159,DEL, Visa Debit,16 527591,527591,MCD, Master Card Debit,16 475183,475183,DEL,Visa Debit,16 535110,535309,MCD,MasterCard Debit,16 476220,476269,DEL,Visa Debit,16 557347,557496,MCD,MasterCard Debit,16 476340,476389,DEL,Visa Debit,16 545721,545723,MCD,MasterCard Debit,16



4

### Servebase Format

The following section describes the setup and use of Online Credit Card Transfer for Servebase Handling.

## Prerequisite, Supported Systems, and Compatibility

### Prerequisite, Supported Systems, and Compatibility

This section describes the minimum requirements to use the Online Credit Card Transfer Servebase Handling.

#### **Prerequisite**

- OHC Ship Transf.exe
- · OHC Tools.exe
- Wrapper.dll
- SPMS Parameters
- Servebase Web Services Installation
- CRUFLFC.dll

#### Compatibility

SPMS version 20.2 or later. For customer operating on version below 20.2, database upgrade to the recommended or latest version is required.

### **SPMS Parameters Servebase**

This section describes the **Parameters** available to Servebase Handling and they are accessible in the **Administration module**, **System Setup** parameter.

Table 4-1 PAR\_GROUP General

PAR Name	PAR Value	Description
Enable Signature Capture for Credit Card	0 or 1	0 - Disable Signature Capture for Credit Card.
		1 - Enable Signature Capture for Credit Card.
CC Type not Supported	<value></value>	Specifies unsupported Credit Card type, for example, ('AX','DS','VI','MC','DI','DC','JC', 'EC')

Table 4-1 (Cont.) PAR\_GROUP General

PAR Name	PAR Value	Description
CC Partial Reversal	<value></value>	Specifies the Credit Card type which does not support partial reversal, for example: ('AX','DS','VI','MC','DI','DC','JC', 'EC')
CC Type Reversal Not Supported	<value></value>	Specifies the Credit Card types for reversal. authorization not supported for online credit card system, for example: ('AX','DS','VI','MC','DI','DC','JC', 'EC')
Online Initial Auth Amount	<amount></amount>	Specifies the initial authorization amount for all card types when the card is swiped at the terminal with online mode.
Show Void Settlement	0 or 1	<ul><li>0 - To hide the voided settlement.</li><li>1 - To show the voided settlement.</li></ul>

Table 4-2 PAR Group Interfaces

PAR Name	PAR Value	Description	
Auto Incremental Auth Amount	<amount></amount>	Specifies the incremental authorization amount.	
Enable Auto Incremental Auth	0 or 1	0 - Disallows the auto incremental authorization.	
		1 - Allows the auto incremental authorization.	
Get Last Approval Code	0 or 1	0 - Does not assign the last approval code for settlement.	
		1 - Assigns the last approval code for settlement.	
Online CC Remote Port	16107	The remote port where interface communication with.	
Online CCard Timeout	120	Duration to wait (in seconds) for a response from Online Credit Card Interface.	



Table 4-2 (Cont.) PAR Group Interfaces

PAR Name	PAR Value	Description	
Online CCard Automatic Settlement	0 or 1	0 - Settlement records will send by batch manually. ('Credit Card Batch Settlement' function is enabled in Management module).	
		<ol> <li>Ship Transfer picks up the settlement automatically.</li> </ol>	
CC Auth/Settlement Folder	Folder path	Repository location for authorization/settlement files generated by OHC Credit Card Interface.	
		Note: To avoid adverse impact on your system, please abstain from using the following folder path:	
		<ul> <li>System Directory</li> <li>"\Users\Public\Documen ts\Oracle Hospitality Cruise"</li> </ul>	

Table 4-3 PAR Group Not Specified

PAR Name	PAR Value	Description
CC Transfer Format	SERVEBASE	Online Credit Card Format.
CCard Interface Name	<workstation ip="" name=""></workstation>	Workstation IP address/name which used to run OHC Ship Transfer.

## System Configuration Servebase

This section describes the various system codes setup within the **Administration module.** 

### **Setting up Department Code**

A debit and credit department code of each credit card type accepted by the ship must be configured for charging and posting to take place.

#### **Credit/Debit Card Department Code Setup**

- 1. Log in to the **Administration module** and select **Financial Setup, Department setup** from the drop-down list.
- 2. Click New to create a Sub-Department code.



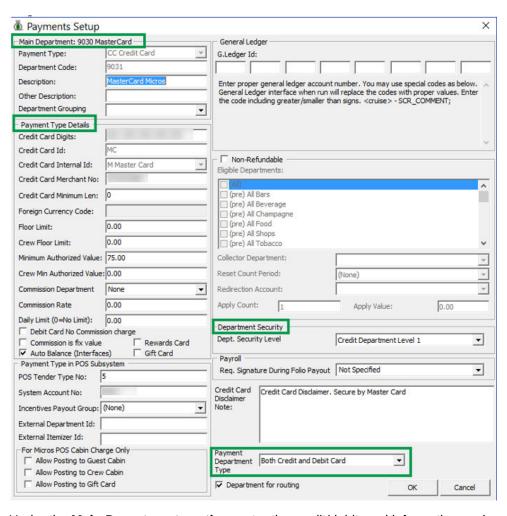


Figure 4-1 Department Code Setup

- 3. Under the **Main Department section**, enter the credit/debit card information such as payment type, department code and description.
- 4. In the Payment Type Details section,
  - Enter the first two digits of the first set of the credit card number in Credit Card digit.
  - Enter the Credit Card ID, for example MC MasterCard, VI Visa, and others
  - c. Select the corresponding Credit Card Internal ID from the drop-down box.
  - d. Enter the Credit Card Merchant Number provided by the Service Provider.
  - e. Set the Minimum Authorized Value to 0.
  - **f.** Select the **Commission department** from the drop-down list and update the **commission rate** in percentages.
  - g. Check the **Debit Card No Commission Charge** if the commission is not applicable to debit card.
- In the Department Security access, select the appropriate security level from the drop-down box.



- 6. Select the **Payment Type** under the Payment Department Type, either Both Credit and Debit card, Credit card or Debit card.
- 7. Click **OK** to save.

### Setting up Merchant Details

#### **Setting up Merchant Details**

A Merchant credential is required for credit card authorizations and payment to be handled efficiently. Before you set up the Merchant's credential, you must have the following information ready:

- Pre-configured Credit Card type
- Currency code exist in currency table
- Merchant information from service provider

To setup the merchant,

- 1. From the Financial Setup, select Credit Card Merchant setup from the drop-down list.
- 2. Right-click and select Add New.

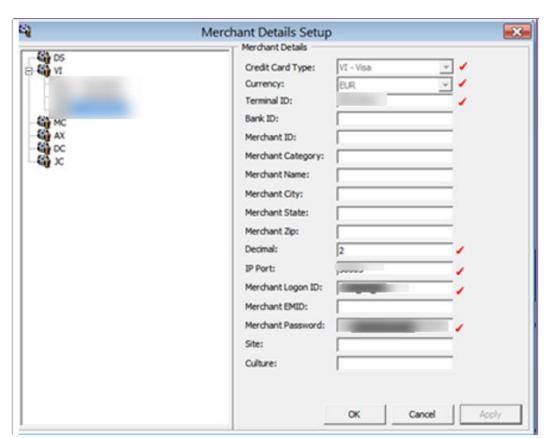


Figure 4-2 Merchant Details Setup

- 3. Fill in the following fields correctly:
  - a. Credit Card type



- b. Currency
- c. Terminal ID The Terminal ID must match the PIN pad Terminal ID.
- d. Decimal
- e. IP port
- f. Merchant Logon ID
- Merchant Password
- Click OK to save.
- 5. Repeat steps 1 to 4 for other credit card types accepted by the Merchant.

Below are the sample Merchant Information used for testing purpose only.

**Table 4-4** Sample Merchant Information (Only for Reference)

Merchant Info	User Account 1	User Account 2	User Account 3
Credit Card Type	MC - Master Card	MC - Master Card	MC - Master Card
Currency	GBP	GBP	GBP
Terminal ID	001	002	003
Bank ID	FID	FID	FID
Merchant ID	21249872	21249872	21249872
Decimal	2	2	2
IP Port	30003	30003	30003
Merchant Logon ID	FIDxx0000001	FIDxx00002	FIDxx00003
Site	FID000000001	FID000000001	FID000000001
Culture	en	en	en

### Setting up a Receipt

Receipts are generated upon payment and this requires a report template to be set up. A Standard Credit Card receipt template is available in **Administration Module**, **System Setup**, **Report Setup**, **Receipts group**. Please contact Oracle Hospitality Cruise Support if you would like to configure a customized receipt format.

#### Setting up the PIN Pad Terminal

In order for the program to determine the connection availability of the PIN Pad device, an IP address is assigned to the Credit Card device connecting to the PIN Pad Terminal program.

#### **Adding PIN Pad Device**

- 1. From the Administration drop-down menu, select Pinpad Terminal Setup.
- 2. In the Pinpad Terminal Setup screen, right-click and select Add New.
- 3. Enter the credit card device by the IP address assigned.
- The Enabled checkbox is selected by default. To disable the device, deselect the checkbox.
- 5. Click **OK** to save.



### Servebase Web Services Installation

The PED Framework Service (PC-EFT POS) is a Web Service that provides communication between SPMS applications and the Servebase Gateway. You are to obtain the installation file from the bank/PXP provider and follow the deployment instructions.

1. After the installation is complete, open

Servebase.Pceft.Ped.Service.Server.exe.config in C:\Program Files (x64)\PXP Solutions folder and change the highlighted text value per below.

```
<diagnosticConfiguration keepLogFilesFor="10" logFilePath="c:\work\" />
```

<endpointSettings port="####" messageFormat="Native" endpointProtocol="Ip"
supportDeviceIsDisplaying="true" supportCustomerInteraction="true"
supportAcknowledgements="true" supportNetworkStatus="true"
monoCertificatePolicy="false" />

<externalServices base="<servebaseURL>" requestTimeout="30000">

<endpointAddress type="Request">

<serialPort comPort="COM1" />

<tcp hostName="IP ADDRESS" />

<failoverService processTimePollIntervalInSeconds="300" atOnceTransactionLimit="15" ignoreProcessorTime="false" path="c:\dir\"

storeFailoverResponses="true" failedResponseListeningAvailable="true" socketIdleTime="10"/>

- 2. At the root of C:\, create and name the folder as **Work**. This is used to save the transaction log between SPMS applications and the Servebase gateway
- Copy the Credential.xml from C:\Programs Files (x64)\PXP Solution folder into C:\Work folder.

```
<CustomerCode></CustomerCode>
```

- <IpAddress></IpAddress>
- <Merchant></Merchant>
- <Password></Password>
- <Site></Site>
- <Terminal1><Terminal1/>
- <Username></Username>
- <WorkStation></WorkStation>
- 4. At the Windows desktop, click Start and click Run.
- 5. In the Run dialog box, type **Services.msc**, and click **OK**.
- In the Services screen, locate and start the PEDFrameworkService. The Password in Credential.xml will encrypt after PEDFrameworkServices starts.



## Store Forward Handling

The Store Forwarding handling sends the pre-authorization through 'Authorization Connection Type = ForcedFailOver' and receives the response from the listener port, whereas the normal handling sends the pre-authorization through 'Authorization Connection Type = OnlineAuthorization' and receive the response from current port.

To use the Store Forward handling, the **Interfaces, Store Forward Handling** parameter must be enabled and configured per the following:

- Open Servebase.Pceft.Ped.Service.Server.exe.config in C:\Program Files
  (x64)\PXP Solutions folder and change the highlighted value per the following:
  <failoverService processTimePollIntervalInSeconds="300"
  atOnceTransactionLimit="15" ignoreProcessorTime="false" path="c:\dir\"
  storeFailoverResponses="true" failedResponseListeningAvailable="true"
  socketIdleTime="10"/>
- 2. The default resend interval is set to 60 seconds. Change if necessary.
- 3. When registering the credit card, the Ship Transfer will not pick up the registration and send the authorization immediately. Hence, the authorization status is 'Outstanding' and the following message is shown in the Ship Transfer log.
  - <a href="AuthorizationConnectionType">AuthorizationConnectionType</a>
- **4.** The Ship Transfer resumes sending the failed transactions to the PXP Services provider after a few minutes.

### Setting up Device

- Run the Management module and navigate to the Option menu and Hardware tab
- Enter the device IP Address in the Pin Entry Device Initialization section and click Save PED IP.




Options General Colors Hardware Video Parameters Document Scanner Support Report Printers Barcode Reader (RS232 Connection) Card Reader/Encoder #1 Card Reader Type #1: (None) Port Number: Bands Port #1: Speed (Bits Per Second): Cash Book Vouchers RFID Type v Data Bits: Certificates \* Invoices ¥ Key Runner Receipts Card Reader Type #2: (None) Label ۳ Stop Bits: Labels Receipt v Passport Readers RFID Type #2: Receipts (None) ¥ Safety Forms RFID Type: Card Printer Encode Door Lock (Track #3) Key: No • Auto Detect v Eltron Door Key Options : Encode At Lock -Enable MyCard ACR38 Reader Do not encode Magnetic Stripe Signature Device F Enable Sound for Desko Penta Zebra Device Name: • (None) Credit Card Reader: (None) • cmbZebra Coerdvity: Special RFID Encoding Port: (undefined) \* CEIA Reader Port: Board Card Print Manager Mapping Use Right Mouse Button Emulation No Mapping -Track 1 Start Sentinel: 6/2 End Sentinel: Pin Entry Device Initialization Track 2 Start Sentinel : ; Track 3 Start Sentinel : + Pin Entry Device IP Additional Cmd for Pebble Evolis when encode track 3: Save PED IP Cancel Apply

Figure 4-3 Management — Options — Hardware — Pin Entry Device Initialization

- 3. At the Pin Entry Device confirmation message, the Workstation name is visible. On the device screen, the 'PED [IP Address] Initialization on PC [workstation name]' is shown. Verify the device is connected to the correct workstation.
- 4. The response message from PED Framework Service is shown in the Ship Transfer Message tab when the device is successfully configured in the Management module.

Figure 4-4 Ship Transfer — Device Initialization

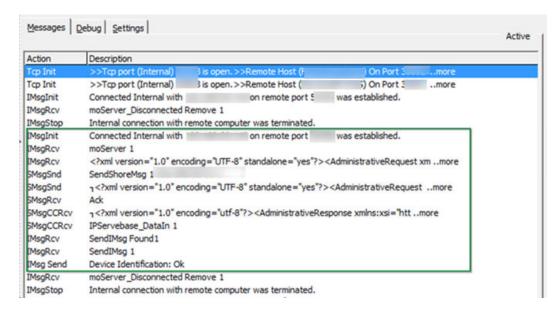



 Click the Yes button on the device defined for the workstation. After the device is identified, a dialog box prompting 'Device Identification:OK' appears in SPMS. Click OK to confirm and close.

## **OHC Ship Transfer Setup**

The Ship Transfer Interface is an interface that sends the credit card payments for authorization from SPMS to SERVEBASE Payment Gateway by batch.

Figure 4-5 OHC Ship Transfer Setup



**Table 4-5 Ship Transfer Application Parameter** 

Settings	Value	Description
Acknowledge Timeout (sec)	<value></value>	Defines the duration to wait for a response from other parties, such as third party provide, bank provider before timing out the authorization.
Shore Remote Host	<ip address="" host="" name=""></ip>	IP address of the workstation/PC where Servebase PED Framework Services is running.
IP Shore Connection Port	5000	TCP Port number of another party interface to connect.
Remote listener Port	30002	Listener port for third party interface.




Table 4-5 (Cont.) Ship Transfer Application Parameter

Settings	Value	Description
Workstation ID	<workstation id=""></workstation>	Workstation ID maintained in Credit Card Merchant Setup (CCM) but not in Pin Pad Terminal Setup (TYP_PIN).
		The workstation ID is saved in internal system parameter.
Resend Interval	<value></value>	Define the value in minutes to resend the outstanding authorizations and settlements after X minutes.

# Configuring OHC Ship Transfer

- 1. Start OHC Ship Transf.exe and navigate to the **Settings** tab.
- 2. In the **Shore Communication** section, update the value of the respective parameter.
- 3. Click **Apply** to save the setting.
- 4. Navigate to the **Message** tab and verify the connection to Servebase Services (PED Framework Service is connected successfully.

Figure 4-6 OHC Ship Transfer Connection to PED Framework Services

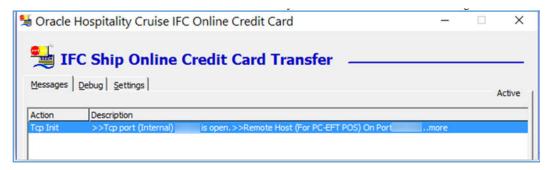

- 5. To ensure the PED Framework Service is running, see step 6 of Servebase Web Services Installation.
- 6. The above settings are saved in **OHCSettings.par** under the following tag.

Table 4-6 OHCSettings.par

Setting Name	Description
[#ShipTransf.Connection.Connection=TCP/IP#]	Indicates the OHC Ship Transfer is in Active mode.
[#ShipTransf.Connection.Remote Host=HOSTNAME	Indicates the remote host IP Address where PED Framework Services running.



Table 4-6 (Cont.) OHCSettings.par

Setting Name	Description
[#ShipTransf.Connection.Remote Port=5000#]	Indicates the TCP Port number of other party the interface connects to.
[#ShipTransf.Connection.Remote Timeout=5#]	Indicate the duration to wait for a response from other party before timing out the authorization.
[#ShipTransf.Connection.Remote Listen Port=30002#]	Indicates the listener port of the third party such as PXP Web Service port.
[#ShipTransf.PARAM.Restart Interval=24#]	Indicates the interval hours before system restarts the Ship Transfer program.
[#ShipTransf.PARAM.Resend Interval=1#]	Indicates the last sent date/time of the batch top up. The saved date/time format is YYYMMDDHHMMSS.

## Registering a Credit Card Servebase

This section describes the steps taken to register a credit card in SPMS.

### **Registering Credit Card in Management Mode**

- 1. Log in to the Management module and select Guest from the Cashier Menu.
- 2. Select a checked-in guest and click the **Get Credit Card** button.
- 3. The system prompts for a card to be swiped. Swipe the credit card through the card device.
- 4. After the guest enters the credit card pin, the Servebase service checks and authenticates the initial authorization at the same time, and stores the card information in the **Guest Handling**, **Credit Card tab**.
- If the initial authorization is approved or outstanding, the credit card status will be in active mode.
- 6. If the initial authorization is declined, the credit card status is in deactivate mode.

Figure 4-7 Guest Handling Credit Card




### Settling a Credit Card Batch

The Servebase Handling supports both online and offline batch settlements and the settlement function is accessible from **Management module**, **Cashier Menu**. This function is mainly used by financial officers to review all the settlements created prior to sending the settlements to the Servebase service provider.



This function is enabled when the **Interface, Online CCard Automatic Settlement** parameter is disabled. Else, OHC Ship Transfer will pick up the settlement transaction and send it to the Servebase service provider automatically as shown in the figure below.

Figure 4-8 Management, Cashier — Credit Card Batch Settlement

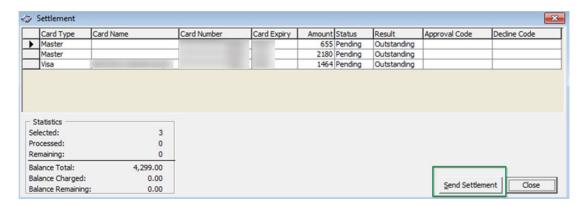

The voided settlement transaction is highlighted in red and appears when the **General, Show Voided Settlement** parameter is enabled.

Figure 4-9 Management, Cashier — Batch Settlement with Voided Transaction



Please note that the program only processes the settlement with CCT\_QSTATUS = 0. If the original settlement is still residing in the 'pending send' queue, the voided settlement will not be sent for processing. Both the original settlement and voided settlement record will be highlight if the color defined in the **Management module**, **Option**, **Color**, **NoPrint** section.

## Performing a Credit Card Refund

The credit card Refund function is available to Serverbase Handling only. The refund button is enabled automatically when a negative amount is entered.

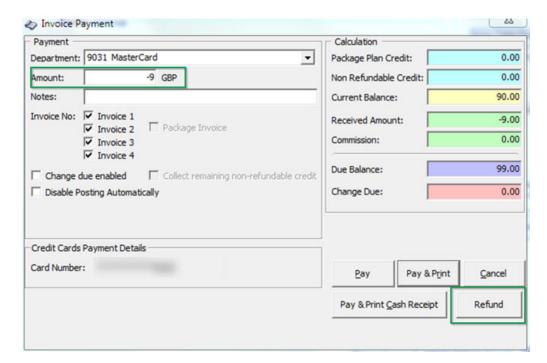


Figure 4-10 Management, Pay Invoice Refund

- 1. In the Guest Handling screen, clicking the **Refund** button will prompt a 'Request Token' screen. Insert or swipe the card through the device.
- 2. After the refund process completes successfully, the authorization code is CCA MTYPE = 6 and POS transaction is created.
- 3. If the guest account has a pre-registered credit card and a negative amount is entered followed by clicking the **Pay** button in Pay Invoice screen, you will receive a message box prompting you to perform a Refund instead.

# Registering Credit Card in Advanced Quick Check In (AQCI)

Below are the steps to register a credit card in Advance Quick Check-in module.

- Log in to the AQCI program and search for an account using the Account Search function.
- Click the Get Credit Card button and swipe or insert the card into the card reader device when prompted.
- After the guest enters the pin, the Servebase service checks and authenticates the initial authorization. Details of the card are stored in Guest Handling, Credit card tab.
  - If initial authorization is approved or outstanding, the credit card status will be in active mode.
  - If initial authorization is declined, the credit card status is in deactivate mode.



Cuest Info Disc, Route, Pkig Invoice: 0.00 More Guest Info Service Info Activity Viewer Revenue Analyzer History

Credit Cards Comments Other Info Travel Documents Custom Info Guest History Loyalty Program

Number of Cards Registered: 1

Active Invoice Card Type DCC Card Number Exp Date Exchange Rate Card Owner Currency Limits Signature Exist

Cost View Authorizations Activate Card Set Card Limit Remove Card Manual Increment Deactivate Card

Reset DCC

More Exchange Rate Card Currency Limits Signature Exist

Signature Captured

Signature Captured

Signature Captured

Signature Captured

Signature Captured

Signature Captured

Figure 4-11 Guest Handling Screen —Credit Card Tab

## Sample Response File in Ship Transfer

The sections below describe the samples of the response messages as shown in the Ship Transfer program.

Figure 4-12 Response Message of Register Credit Card

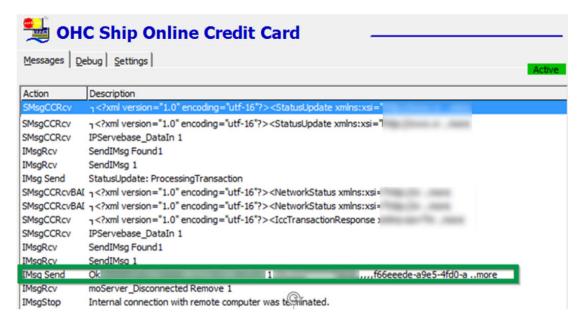




Figure 4-13 Response Message of Register Credit Card in Debug Details



Figure 4-14 Response Message of Send Authorization

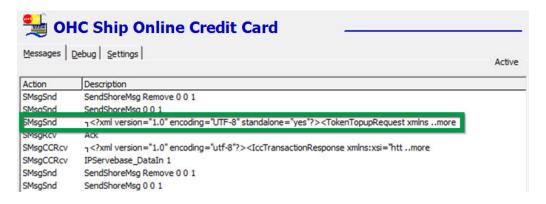


Figure 4-15 Response Message of Send Authorization in Debug Details

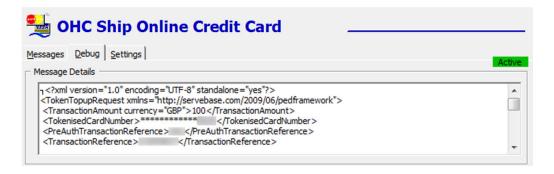


Figure 4-16 Response Message for Send Settlement






Figure 4-17 Response Message for Send Settlement in Debug Details



Figure 4-18 Response Message for Send Refund



Figure 4-19 Response Message for Send Refund in Debug Details

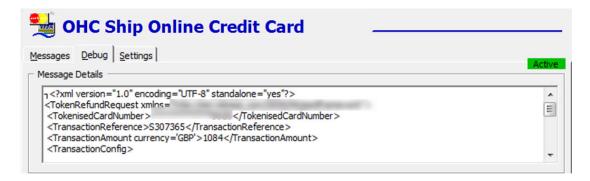

## **Synopsis**

The following sections describe the synopsis of Servebase Handling.

**Register Credit Card and Send Initial Authorization** 

Table 4-7 Register Credit Card and Send Initial Authorization Process and Expected

No	Process	Expected Result	Remarks
1	Use the <b>Insert</b> method to register the credit card where invoice balance = 0	Initial authorization amount = 'Online Initial Auth Amount'	CRD_MANUAL = I
2	Use the <b>Insert</b> method to register credit card where invoice balance > 'Online Initial Auth Amount'	Initial authorization amount = 'Online Initial Auth Amount'	CRD_MANUAL = I
3	Use the <b>Swipe</b> method to register credit card where invoice balance = 0	Initial authorization amount = 'Online Initial Auth Amount'	CRD_MANUAL = A
4	Register Credit Card with the Signature Capture function enabled.	Prompt for signature. Able to register credit card after accepting signature capture.	
5	Clicking the Cancel button on Signature Pad after Credit Card accepted by bank issuer at Management module.	<ul> <li>Message 'User Cancel Signature Action' prompt.</li> <li>Does not allow to register a credit card.</li> </ul>	
6	Register same credit card where the previous registered credit card is deactivated after settlement.	Same credit card will be reactivated and new initial authorization is sent.	
7	Register the same credit card where previous registered credit card is deactivated manually.	Message 'The Credit Card is already registered in the system'. You need to click 'Activate' button to activate the card manually.	
8	Register first credit card during Online. Swipe the same credit card during Offline.	The Second credit card will be created due to the real token does not reply to the actual credit card number.	



Table 4-8 Add Posting and Send Incremental Authorization

No	Process	Ex	pected Result	Remarks
1	Total posting is less than the initial authorization.	•	No incremental authorization sends.	
2	Total posting is more than initial authorization, but less then 'Auto Incremental Amount'.	•	Incremental Amount = 'Auto Incremental Amount'.	
3	Total posting is more than initial authorization, and more than 'Auto Incremental Amount'.	•	Incremental Amount = [Total Posting Amount] - [Total Authorization Amount]	

Table 4-9 Pay Invoice and Send Settlement Authorization

No	Process	Expected Result	Remarks
1	Payment amount is more than Total Authorization Amount. The incremental authorization is Approved / Declined / Outstanding.	<ul> <li>Send additional incremental authorization.</li> <li>Message 'Settlement is done. The card is currently deactivated' prompt.</li> <li>Payment type is changed to default payment type.</li> </ul>	
2	Payment amount is less than total authorization amount.	<ul> <li>No reversal is sent.</li> <li>Message 'Settlement is done. The card is currently deactivated' prompt.</li> <li>Payment type is changed to the default payment type.</li> </ul>	



Table 4-9 (Cont.) Pay Invoice and Send Settlement Authorization

No	Process	Expected Result	Remarks
3	Payment amount is same with total authorization amount. Where, incremental authorization is approved.	<ul> <li>Message         'Settlement is         done. The card is         currently         deactivated.'         prompt.</li> <li>Payment type is         changed to the         default payment         type.</li> </ul>	
4	Pay Invoice again after payment is voided.	<ul> <li>Message         'Settlement is         done. The card is         currently         deactivated'         prompt.</li> <li>Payment type is         changed to the         default payment         type.</li> </ul>	
5	Pay Invoice while authorization still in 'Outstanding' status	<ul> <li>The program is not able to get CCT_CCA_ID and it caused the CRD_ACTIVATION_ LOCK still is 0.</li> </ul>	

#### **Direct Sales**

Direct sales function is available when a guest does not have a pre-registered credit card. The 'Pay Direct Sale' is visible in the Pay Invoice screen.

Table 4-10 Direct Sales Process and Expected Result

No Pro	cess	Expected Result	Remarks
	payment without -registered credit d		

Table 4-11 Void Payment and Send Refund

No	Process	Expected Result
1	Use Void button; If original settlement CCT_QSTATUS = 0	Credit Card is reactivated automatically without initial authorization
		Original settlement and refund will not be sent out
		Payment type changed to Credit Card



Table 4-11 (Cont.) Void Payment and Send Refund

No	Process	Expected Result
2	Use Void button; If original settlement CCT_QSTATUS > 0	
		Send refund
		Guest payment type remain as Cash
3	Pay amount \$80 with credit	Initial authorization = \$20
	card, but invoice balance = 0	Incremental authorization = \$60 send out
		Invoice balance = -\$80
		Pay -\$80 will send as refund
4	Invoice balance = \$150, pay	Settlement created with CCT_AMOUNT = \$200
		Invoice balance = -\$50
		Pay -\$50 will send as refund
5	Pay -\$120 on invoice balance=0	Servebase does not support a negative amount
		The message 'Unable to refund a transaction until it has been settled' prompt

Table 4-12 Pay Negative Amount and Send Refund

No	Process	Expected Result
1	A pre-registered credit card is deactivated. Payment type is Cash. Enter the negative amount and click on Refund button.	<ul> <li>Refund sent successfully.</li> <li>Authorization created with CCA_MTYPE = 6.</li> </ul>
2	A pre-registered credit card is activated. Payment type is a Credit card. Enter the negative amount and click on Refund button.	<ul> <li>Refund sent successfully.</li> <li>Authorization created with CCA_MTYPE = 6.</li> <li>The credit card is deactivated automatically and not able to be reactivated.</li> </ul>
3	A pre-registered credit card is activated. Payment type is Credit card. Enter the negative amount and click on Refund button with swipe different credit card.	<ul> <li>Refund sent successfully.</li> <li>Authorization created with CCA_MTYPE = 6.</li> <li>The pre-registered credit card remains active.</li> </ul>



Table 4-12 (Cont.) Pay Negative Amount and Send Refund

No	Process	Expected Result
4	No pre-register credit card. Payment type is Cash. Enter the negative amount and click on Refund button with swipe different credit card	<ul> <li>Refund send successfully.</li> <li>Authorization created with CCA_MTYPE = 6</li> <li>Card record created and deactivated.</li> </ul>
5	Do refund while no internet connection	<ul> <li>Refund failed due to transaction being approved offline.</li> </ul>

### **Multiple Credit Card**

The message 'This Credit Card is already registered in the system' will always prompt even when the **Check Credit Card Registration** parameter is disabled.

Table 4-13 Multiple Credit Card Process and Expected Result

No	Process Expected Result
1	Register same credit card for the same guest where a first registered credit card is in active mode.  Message as above prompt. No Card record and Authorization create for second registration.
	Guest A Register Card A
	Guest A Register Card A again
2	Register same credit card for the same guest where a first registered credit card is deactivated manually.  Message as above prompt. You have to re-activate the credit card manually through Activate button.
	Guest A Register Card A and deactivated manually Guest A Register Card A Authorization create for second registration. again
3	Register same credit card for the same guest where the first registered credit card is deactivated after settlement.  No message prompts.  The card is reactivated automatically.  Initial authorization sends again.
	Guest A Register Card A, and do settlement.
	Guest A Register Card A again
4	Register same credit card No message prompts. for different guest where a first registered credit card is in active mode.
	Guest A Register Card A
	Guest B Register Card B



Table 4-13 (Cont.) Multiple Credit Card Process and Expected Result

No	Process	Expected Result
5	Register same credit card for different guest where the first registered credit card is deactivated manually.	No message prompts. The credit card registers successfully.
deactivate manua	Guest A Register Card A, and deactivate manually Guest B Register Card A	
6	Register same credit card for different guest where the first registered credit card is deactivated after settlement.	No message prompts. The credit card registers successfully.
	Guest A Register Card A, and do Settlement.	
	Guest B Register Card A	

### **Multiple Pin Pad Terminal Run Simultaneously**

Table 4-14 Multiple Pin Pad Terminal Run Simultaneously Process and Expected Result

No	Process	Expected Result
1	Run the same application on different PC. Each PC connect to the different pin pad	Able to register credit card accordingly.
2	Run a different application on different PC. Each PC connect to the same pin pad	The message 'The Pin Entry Device IP xxx is in used by OHC XX on workstation XX' shall prompt.

### **Activate/Deactivate Credit Card**

Table 4-15 Activate/Deactivate Credit Card Process and Expected Result

No	Process	Expected Result
1	The Card is deactivated after performing the settlement	<ul> <li>Message prompt         "Settlement or reversal is done for this card, please get credit card again."</li> <li>Credit card remains deactivated.</li> <li>Found the CRD_LOCK_ACTIVATION = 1</li> </ul>
2	Use Deactivate Card button to deactivate the card	<ul> <li>Credit card is able to be activated.</li> </ul>



Table 4-15 (Cont.) Activate/Deactivate Credit Card Process and Expected Result

No	Process	Expected Result
3	Card is deactivated after Direct Sales	<ul> <li>Message prompt         'Activation not allowed for         Direct Sale Credit / Debit         Card'.</li> <li>Found the         CRD_LOCK_ACTIVATION =         2</li> </ul>
4	Card is deactivated after upgrade from an old format to SERVEBASE format	<ul> <li>Message prompt 'This card is not allowed to activate as the credit card format is not supported'</li> </ul>
		<ul> <li>Found the CRD_TOKEN is null.</li> </ul>

Table 4-16 Manually Add Authorization

No	Process	Expected Result
1	Click Add Authorization button on View	Authorization Value screen pops up.
	Authorization screen	Incremental Authorization with CCA_STATUS= 0 is created.
		OHC Ship Transfer will send the authorization for approval.

### Offline Handling



Table 4-17 Offline Handling Process and Expected Result

No	Process	Expected Result
1	No internet connection while getting credit card	<ul> <li>Credit card is still able to register and saved into the database with CCA_STATUS=0, CCA_QSTATUS = 8</li> <li>OHC Ship Transfer keep trying and show 'QueryForFailover'</li> <li>Restart PED Framework Service, the Authorization record is resent for authorization .</li> <li>Proceed to add posting, the Top Up authorization will not send until the</li> </ul>
		initial authorization get approved
2	Initial authorization of the offline credit card registration return declined	<ul> <li>All the authorization (top up, settlement) belongs to the credit card will update to declined automatically</li> <li>Proceed to add posting, the offline initial auth created (CCA_MTYPE = 1)</li> </ul>



Table 4-17 (Cont.) Offline Handling Process and Expected Result

No	Process	Expected Result
No 3	Multiple Offline Token handling - Initial Authorization is 'pending' status	<ul> <li>Register credit card A.</li> <li>Interface sends the preauthorization but no response. Initial authorization in outstanding status.</li> <li>Register credit card B.</li> <li>Interface sends the preauthorization and get approved response. Initial authorization in approved status.</li> <li>Add posting to credit card A.</li> <li>Interface does not send the top up request. Incremental authorization in outstanding status.</li> <li>Add posting to credit card B.</li> <li>Interface sends the top up request and get approved response. Incremental authorization in outstanding status.</li> <li>Perform settlement for credit card A.</li> <li>Interface does not send Settlement request for credit card A.</li> <li>Interface does not send Settlement request for credit card A. (This is due to initial authorization is still pending for approval). The settlement in outstanding status.</li> <li>Perform settlement for</li> </ul>
		<ul> <li>credit card B.</li> <li>Interface sends settlement request and get approved response. Settlement in approved status.</li> </ul>



Table 4-17 (Cont.) Offline Handling Process and Expected Result

4 Multiple Offline Token handling - Initial Authorization is 'declined' status	Register credit card A. Interface sends the preauthorization but no response. Initial authorization in
	Interface sends the preauthorization and get approved response. Initial authorization in approved status.  Interface receives decline response for credit card A to pre-authorization.  Initial authorization for credit card A in declined status. Credit card A is deactivated automatically.

### **Declining Offline Token**

### Credit Card Data:

- Date: Credit Card A + Credit Card B
- Initial authorization is outstanding
- Incremental authorization is outstanding
- Settlement is Outstanding



Table 4-18 Credit Card Process and Expected Result

Parameter 'Disable C/Card and Posting when auth is decline' = 0  1	No	Process	Expected Result
response 'decline'  Pupdate CRD_LOCK_ACTIVATION 1 for credit card A.  Credit card is deactivated and payment department default to Cash.  If multiple credit card, all invoices are routed to credit card B.  Posting status is enable.  One of the incremental authorization responses back 'decline'  Parameter 'Disable C/Card and Posting when auth is decline'  Parameter 'Disable C/Card and Posting when auth is decline'  Initial authorization response 'decline'  Posting tard activation status remains active.  Parameter 'Disable C/Card and Posting when auth is decline'  Parameter 'Disable C/Card and Posting when auth is decline'  Posting tard activation and Settlement for credit card activation and Settlement for credit card A is updated to decline.  Update CRD_LOCK_ACTIVATION 1 for credit card A. Credit Card A is deactivated and payment department default to Cash  Posting is disabled.  Posting is disabled.  If multiple credit card, all invoices are routed to credit card B. payment department	Parameter 'Disable C/Card	and Posting when auth is dec	cline' = 0
authorization responses back 'decline'  Parameter 'Disable C/Card and Posting when auth is decline' = 1  Initial authorization response 'decline'  All Authorization and Settlement for credit card A is updated to decline.  Update  CRD_LOCK_ACTIVATION  1 for credit card A.  Credit Card A is deactivated and payment department default to Cash  Posting is disabled.  Posting is disabled.  If multiple credit card, all invoices are routed to credit card B. payment department	1		Settlement for credit card A is updated to decline.  Update CRD_LOCK_ACTIVATION = 1 for credit card A.  Credit card is deactivated and payment department default to Cash.  If multiple credit card, all invoices are routed to credit card B. payment department default to credit B.
Initial authorization response 'decline'  All Authorization and Settlement for credit card A is updated to decline.  Update CRD_LOCK_ACTIVATION = 1 for credit card A. Credit Card A is deactivated and payment department default to Cash  Posting is disabled.  If multiple credit card, all invoices are routed to credit card B. payment department	2	authorization responses	<ul><li>is updated to decline.</li><li>Credit card activation</li></ul>
response 'decline'  Settlement for credit card A is updated to decline.  Update  CRD_LOCK_ACTIVATION  = 1 for credit card A.  Credit Card A is deactivated and payment department default to Cash  .  Posting is disabled.  If multiple credit card, all invoices are routed to credit card B. payment department	Parameter 'Disable C/Card	and Posting when auth is dec	cline' = 1
default to credit B.	1		Settlement for credit card A is updated to decline.  Update CRD_LOCK_ACTIVATION = 1 for credit card A. Credit Card A is deactivated and payment department default to Cash  Posting is disabled.  If multiple credit card, all invoices are routed to credit card B. payment department



Table 4-18 (Cont.) Credit Card Process and Expected Result

2	One of the incremental	• Only that Authorization
_	authorization responses back 'decline'	is updated to decline.  • Credit card status is
		deactivated and payment department is
		updated to Cash. • CRD_LOCK_ACTIVATION = 0
		<ul> <li>Posting status updates to disable.</li> </ul>
		<ul> <li>If multiple credit card, all invoices are routed to credit card B. payment department default to credit B. Posting status remains</li> </ul>
		enable.
	l and Posting when auth is d	
1	Initial authorization response 'decline'	<ul> <li>All Authorization and Settlement for credit card A is updated to decline.</li> </ul>
		<ul> <li>Update         CRD_LOCK_ACTIVATION         = 1 for credit card A</li> </ul>
		<ul> <li>Credit Card A is deactivated and payment department default to Cash.</li> </ul>
		<ul> <li>Posting is enabled.</li> </ul>
		<ul> <li>If multiple credit card, all invoices are routed to credit card B.</li> </ul>
		payment department default to credit B. Posting status remains enable.
2	One of the incremental authorization responses back 'decline'	• Only that Authorization is updated to decline.
	back decline	<ul> <li>Credit card status is Deactivate and payment department is updated to Cash.</li> </ul>
		• CRD_LOCK_ACTIVATION = 0
		Posting status remains enable.
		If multiple credit card, all invoices are routed to credit card B. payment department default to credit B. Posting status remains enable



status remains enable.

# **Troubleshooting Servebase**

This section describes the troubleshooting steps that assist you in resolving the commonly known errors with Servebase Handling.

Table 4-19 OHC Ship Transfer Interface

Known Issue	Solution
OHC Ship Transfer program opens/closes by itself	<ul> <li>Ensure you are using the latest wrapper.dll.</li> <li>Register the wrapper.dll with regasm.exe.</li> </ul>
Authorization/Settlement in pending status, and not send to Ship Transfer Interface	
	The recommended workaround is:
	<ul> <li>Locate the authorization/settlement with missing initial authorization (CCA_PREVIOUS).</li> </ul>
	• From the Authorization record, determine the transaction date and approval code from the record. Obtain the corresponding Ship Transfer log file and locate the initial authorization reference tag <transactionreference> used in the authorization code under the <authoritycode> tag.</authoritycode></transactionreference>
	<ul> <li>To update the initial authorization reference value to CCA_PREVIOUS column for the affected Authorization record, please contact your consultant/ support to help you regarding an SQL statement that you need to apply when this issue occurs.</li> </ul>
CRD_ACTIVATION_LOCK not updated to 1 after performing the payment.	Ensure CCT_CCA_ID value is valid.
Initial authorization getting 'Outstanding' status	Check the Pin Pad Terminal Setup. Ensure the Pin Pad IP matches the device that is used to register a credit card.
Message 'Socket is not connected', when trying to save the PED IP or Message 'Error in connection with this Pin Entry Device'	<ul> <li>Verify and ensure:</li> <li>The PED Framework Service is running.</li> <li>The connection information is correct.</li> <li>The Pin Pad device is connected.</li> <li>Window firewall is turn off.</li> </ul>
To find the outstanding CCA causing other CCT not able to process	Please contact your consultant/support to help you regarding an SQL statement that you need to apply when this issue occurs.

### Management module

Table 4-20 Management module Known Issue and Solution

Known Issue	Solution
	Check and ensure the PED Framework Services is running.
	Ensure the Configuration file settings is the same as below:
	<endpointsettings< td=""></endpointsettings<>
	port="5000"
	messageFormat="Native"
	endpointProtocol="Ip"
	supportDeviceIsDisplaying="true"
	supportCustomerInteraction="true"
	supportAcknowledgements="true"
Showing 'Please Wait', and did not prompt	supportNetworkStatus="true"
for 'Insert/Swipe Card' to notify user.	monoCertificatePolicy="false" />
Request Token prompts 'Precondition failed: ! string.IsnullOrEmpty (item.Credentials.CustomerCode)	Ensure Merchant Setting is correct (CCM).
Message 'Invalid Credentials. No user records that match the supplied credentials' when try to register credit card	Ensure User account setup in Servebase configuration file / CCM entry is valid.
Message 'Client found response content type of 'text/html; charset=utf-8', but expected 'text/xml' when trying to register credit card.	Ensure the correct credential file is located. And, the ship currency and match with CCM.

### **Windows Services**

Table 4-21 Windows Services Known Issue and Solution

Known Issue	Solution
The PED Framework Service on Local Computer started and stopped. Some services stop automatically if they are not in use by other services or programs,	Ensure the C:\Work folder exists.

### **Transaction Status**

**Table 4-22 Transaction Status** 

Status	Description
Initial Authorization	
CCA_OPERATION	1
CCA_MTYPE	0 (Online initial auth), 1 (Offline initial auth).
CCA_PREVIOUS	Original pre-authorization reference ID, value generated from sequence CNT_POS_RES)
CCA_STATUS	0 (outstanding/pending), 1 (approved), 2 (declined).



Table 4-22 (Cont.) Transaction Status

Status	Description
CCA_QSTATUS	0 (pending), 2 (Transaction sent out from OHC Ship Transfer), 3 (Acknowledgement received from Credit Card provider), 8 (completed).
CCA_STATUS = 0	It means pseudo/temporary token is received
CCA_QSTATUS = 8	and waiting for real token after the connection with merchant/service provider is resume.
Incremental Authorization	
CCA_OPERATION	2
CCA_MTYPE	4 (Online incremental auth), 5 (offline incremental auth)
	If CCA_MTYPE = 5
	<ul> <li>When parameter 'Allow Posting For Declined Authorization' is set to 0. For incremental authorization created during system cruise change.</li> <li>When parameter 'Allow Payment For Declined Authorization' is set to 0 or 2. For incremental authorization created during pay invoice/quick billing.</li> </ul>
Settlement	
CCT_STATUS	0 (outstanding), 1 (approved), 2 (declined)
CCT_QSTATUS	0 (pending), 2 (Transaction sent out from OHC Ship Transfer), 3 (Acknowledgement received from Credit card provider), 8 (Completed).
Direct Payment	
CCA_MTYPE	6
CCA_STATUS	1 (approved), 2 (declined).
No Settlement create	



5

## **PAYPOINT**

The following sections describe the setup, usage of Online Credit Card Transfer for PAYPOINT Handling.

### Prerequisite, Supported Systems, and Compatibility

This section describes the minimum requirements to operate the Paypoint credit card device.

#### **Prerequisite**

- · OHC Ship Transf.exe
- OHC Tools.exe
- Wrapper.dll
- SPMS Parameters
- CRUFLFC.dll version
- PaypointAPI.dlli9
- Interop.PAYPOINTAPILib.dll
- Paypoint.dll

#### Compatibility

SPMS version 20.1 or later. For customer operating on version below 20.1, database upgrade to the recommended or latest version is required.

# **SPMS** Parameters Paypoint

This section describes the **parameters** available to the Paypoint Online Credit Card module, which are accessible in the **Administration module**, **System Setup**, **Parameter**.

Table 5-1 PAR\_GROUP General

PAR Name	PAR Value	Description
Enable Signature Capture for Credit Card	0 or 1	0 — Disables Signature Capture for Credit Card.
		1 — Enables Signature Capture for Credit Card.



Table 5-1 (Cont.) PAR\_GROUP General

PAR Name	PAR Value	Description
Allow payment for declined authorization	0 or 1 or 2	0 — Does not allow payment if authorization is declined by allow when offline.
		1 — Allows payment if authorization is declined or offline.
		2 — Does not allow payment if authorization is decline or offline.
Allow posting for declined authorization	0 or 1	0 — Does not allow posting if credit card authorization is declined.
		1 — Allows posting.
Online Initial Auth Amount	<amount></amount>	Specifies intial authorization amount for all cad types when the card is swiped at the terminal with online mode.
CC Type Not Supported	<blank></blank>	Does not include supported credit card.
Auto Incremental Auth Amount	<amount></amount>	Minimum Incremental Amount.
Specify Decline Error to Allow Payment	('FEIL VED KOMMUNIKASJON','TIMEOUT' )	This parameter is work with 'Allow Payment for Declined Authorization'.
		If payment does not allow due authorization is offline or decline, but with decline error specified in parameter, the program will still allow payment to be performed.

Table 5-2 PAR\_GROUP Interfaces

PAR Name	PAR Value	Description
Specify Decline Error for Resend	('FEIL VED KOMMUNIKASJON','TERM. ER OPPTATT','MISTET FORBINDELSE','TIDSAVBRU DD')	This parameter allows the identified transaction to be resent. If the Paypoint returns a response with an error message, OHC Ship Transfer will update the CCT_STATUS = 0, CCT_QSTATUS = 8 and remove the CCT_NONAPPROVALTEXT for resent purpose.



Table 5-2 (Cont.) PAR\_GROUP Interfaces

PAR Name	PAR Value	Description
Enable Auto Incremental Auth	0 or 1	This is used for OCC. When enabled, the system checks for each debit posting amount if it is within the last approved auth amount. If not, an auth is sent with the amount specified in the parameter Auto Incremental Amount.
		0 - Disable the automatic incremental authorization.
		1 - Enable the automatic incremental authorization.
CC Auth/Settlement Folder	Folder path	Repository location for authorization/settlement files generated by OHC Credit Card Interface
		<b>Note:</b> To avoid adverse impact on your system, please abstain from using the following folder path:
		<ul> <li>System Directory</li> <li>"\Users\Public\Documen ts\Oracle Hospitality Cruise"</li> </ul>

Table 5-3 PAR Group Not Specified

PAR Name	PAR Value	Description
CC Transfer Format	PAYPOINT	Online Credit Card Format.
CCard Interface Name	<workstation ip="" name=""></workstation>	Workstation IP address/name which used to run OHC Ship Transfer.

# **System Configuration Paypoint**

This section describes the various system codes setup within the **Administration module**.

#### **Department Setup**

A debit/credit department code of a credit card type is required for charge/posting and this is setup up in **Administration module**, **Financial Setup**, **Department setup**.

#### **Credit/Debit Card Department Code Setup**

- 1. Log in to **Administration module** and select **Financial Setup, Department setup** from the drop-down list.
- 2. Click New to create a Sub-Department code.



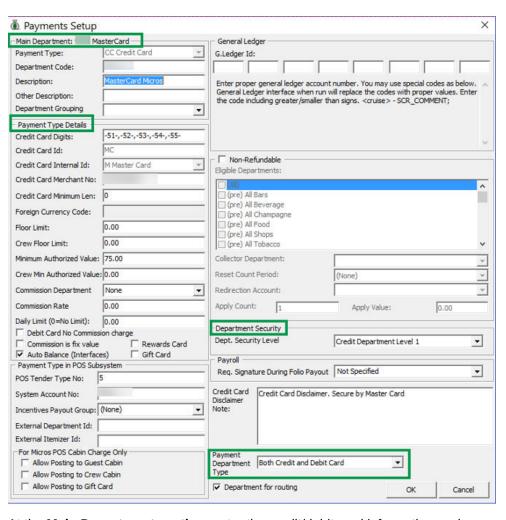


Figure 5-1 Department Code Setup

- 3. At the **Main Department section**, enter the credit/debit card information such as Payment type, department code and description.
  - Enter the two digits of the first set of the credit card number of the Credit Card type.
  - Enter the Credit Card ID. For example, MC for MasterCard, VI for Visa, and others
  - c. Select the corresponding Credit Card Internal ID from the drop-down list.
  - d. Enter the **Credit Card Merchant Number** provided by the Service Provider.
  - Select the Commission Department from the drop-down list and update the commission rate in percentage.
  - f. Check the **Debit Card No Commission charge** if the commission is not applicable to debit card.
- At the **Department Security** access, select the relevant security level from the drop-down list.
- Select the relevant Payment Type under Payment Department Type, either Both Credit and Debit card, Credit card or Debit card. This field determines whether the payment type is a Credit Card or Debit Card.



6. Click OK to save.

#### **Setting up Receipt**

To generate a receipt upon payment, it requires a report template to be set up. A Standard Credit Card receipt template is available in **Administration module**, **System Setup**, **Report setup**, **\_Receipts group**.

Please contact Oracle Hospitality Cruise Support if you would like to configure a customized receipt format.


### **OHC Transfer Setup**

The OHC Ship Transfer Interface is an interface that sends credit card payments from SPMS to Paypoint Payment Gateway for credit card payments to be authorized using interface program OHC Ship Transf.exe

#### **Configure OHC Ship Transfer**

- 1. Start OHC Ship Transf.exe and navigate to the **Settings** tab.
- Enter the Shore Remote Host IP address. The shore remote host is the Paypoint Terminal IP address.

Figure 5-2 OHC Ship Transfer — Setting Screen

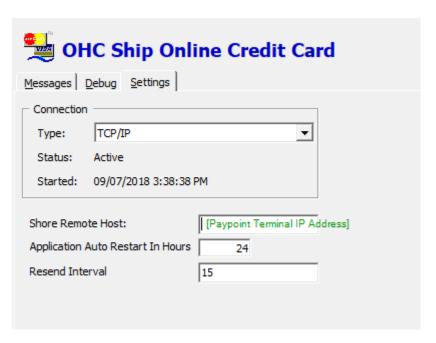

3. The connection is shown in Message tab per below figure.

Figure 5-3 OHC Ship Transfer — Message Screen



## Paypoint Workflow

The SPMS application communicates with Paypoint device through a TCP/IP protocol and the device handles the communication with the host through its own network card. The IP address is stored in the Paypoint device itself.


#### **Send Initial Authorization**

Authorization requests performed at Management module, Get Credit Card or Advance Quick Check-in module, Get Credit Card/Direct Sales are sent to the Paypoint device before passing them to the Paypoint Payment Gateway.

#### Send Incremental/Settlement Authorization

An Incremental/Settlement request performed at **Management module**, **Add Posting / Pay invoice function** is sent to OHC Ship Transfer module before being passed to Paypoint payment gateway.

Figure 5-4 Paypoint Credit Card Handling Workflow

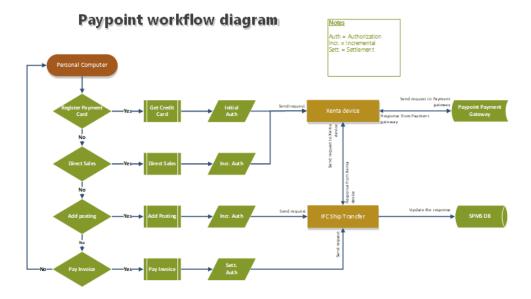


## **PAYPOINT Handling**

This section describes the device set up for Paypoint credit card handling. **Setting up Device in Management module** 

- 1. Navigate to **Options**, **Hardware tab** from the menu bar.
- 2. Enter the device IP address into the **Pin Entry Device Initialization** field and click **Save PED IP**.

Figure 5-5 Hardware Options — Pin Entry Device IP



3. After the **Save PED IP** button is clicked, a Test Communication between the **Management module** and the device shall commence.

Figure 5-6 Management — Test Communication — In Progress




Figure 5-7 Management — Get Credit Card



**4.** When you click the **Get Credit Card** button at Guest Handling, the program communicates with the device and prompts to insert/swipe a credit card.



## Setting up Device in Advance Quick Check-In module


 At the start up the AQCI module and if the module has never been connected/ configured with a card device, the **Pin Entry Device** screen without an IP address prompts 'Enter the device's IP address' and click **OK**.

Figure 5-8 Advance QCI — Pin Entry Device



 If AQCI has been connected to the card device before, the previous IP address is stored in Pin Entry Device. Click the PED Overwrite button to change the IP address if the device's IP is different.

Figure 5-9 Advance QCI — Pin Entry Device — with IP address

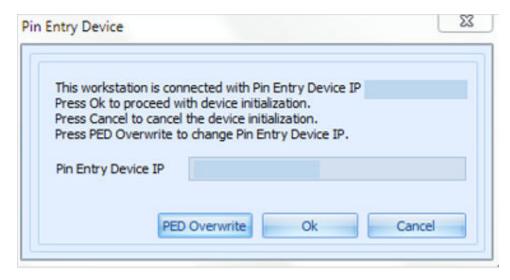

- The AQCI program will run the Test Communication between AQCI and the card device when the OK button is clicked and you will receive a notification when the testing is OK.
- 4. To change or re-test the connection, navigate to the **Setup** tab, click the **Credit Card PED IP setup** at the ribbon bar and the **Pin Entry Device IP** screen shall prompt. Click the **PED Overwrite** button and enter the new IP address.



Figure 5-10 Advance QCI — Credit Card PED IP Setup

## Viewing Authorization Amount in Management module

- 1. Log in to Management module and navigate to Guest Handling screen.
- 2. At the **Search Panel**, browse the guest account.
- 3. Navigate to the **Credit Card** tab of the guest account. The registered card status should be in *Inactive* mode.

Figure 5-11 Management Credit Card



- 4. To display the initial authorization, select the credit card and click View Authorization.
- **5.** The Authorized Value shown in **View Authorization** is the last authorization amount, excluding the amount from Direct Sales.



Guest Info Disc,Route,Pkg Invoice: 826.50 More Guest Info Service Info Activity Viewer Revenue Analyzer History

Credit Cards Comments Other Info Travel Documents Custom Info Guest History Loyalty/Track It

Number of Cards Registered: 1

Active Invoice Card Type Card Number Exp Date Card Owner Limits Signature Exist

No All MasterCard Credit No Limit Yes


Print Receipt View Authorizations Activate Card Set Card Limit

Remove Card Manual Increment Deactivate Card

Figure 5-12 Management View Authorization

- 6. To view the earlier settlement of the credit card, navigate to the **Invoice** tab.
- 7. If the card is a debit card, the amount is credited onto the invoice automatically.

Figure 5-13 Management Authorization Display on Invoice — Debit Card Details

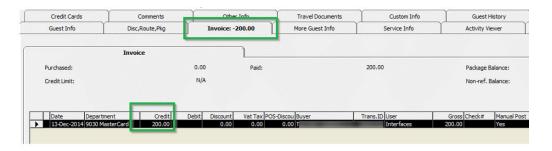


## OHC Ship Transfer (Sample Response Message)

Below are the samples response message in OHC Ship Transfer.

**Send Authorization** 


Figure 5-14 OHC Ship Transfer — Send Request Message — Send Authorization

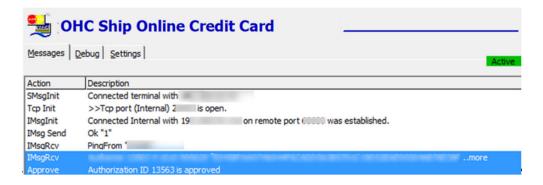




#### **Send Settlement**

Figure 5-15 OHC Ship Transfer — Send Request Message — Send Settlement

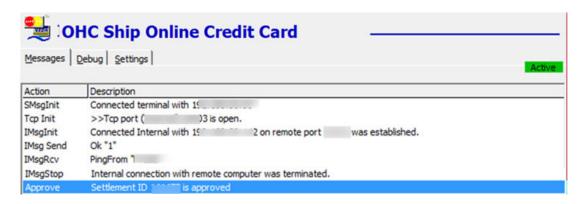

#### **Send Refund**

Figure 5-16 OHC Ship Transfer — Send Request Message — Send Refund

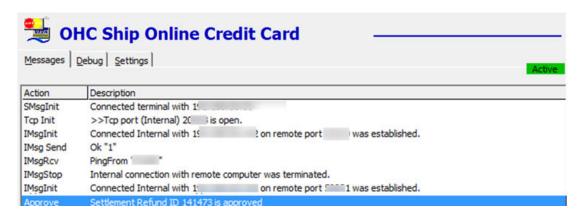

## Troubleshooting PAYPOINT

This section describes the troubleshooting steps that will assist you in resolving the known errors with PAYPOINT Credit Card Handling.

#### General

Table 5-4 General Known Issue and Solution

Known Issue	Solution
To trace the Paypoint error log	The log file is saved in Oracle Hospitality Cruise folder
	.\DIR\DIR\Paypoint.log or Paypointtrans.log

#### Management module



Table 5-5 module

Known Issue	Solution
Error 'No contact with term'	Restart the program or device. This is due to no connection between the program and the device.
Error 'No contact with card issuer'	Try another credit card. This card may be blocked by Paypoint payment gateway.
Error 'Error in sending pre-authorization'	Restart the program and reset the network connection.
Error 'Invalid Service for this card'	This is due to the credit card type not defined in parameter 'CCard Not Supported'.

#### **Transaction Status**

Table 5-6 Transaction Status Detail

Status	Description/Transaction Type
Initial Authorization	
CCA_OPERATION	1
CCA_MTYPE	0 = Online initial auth, 1 = Offline initial auth
CCA_STATUS	0 = outstanding/pending, 1 = approved, 2 = declined
CCA_QSTATUS	0 = pending, 8 = completed
Incremental Authorization	
CCA_OPERATION	2
CCA_MTYPE	4 = Online incremental auth, 5 =offline incremental auth
	If CCA_MTYPE = 5
	When parameter <b>Allow Posting For Declined Authorization</b> is set to 0, the incremental authorization is created during system cruise change.
	When parameter <b>Allow Payment For Declined Authorization</b> is set to 0 or 2, then the incremental authorization is created during pay invoice/quick billing.
Settlement	
CCT_STATUS	0 = outstanding, 1 = approved, 2 = declined
CCT_QSTATUS	0 = pending, 2 = "Process" button pressed at Management module, Credit Card Batch Settlement, 8 = Completed
Direct Payment	
CCA_MTYPE	6
CCA_STATUS	1=approved, 2=declined



#### **Ship Transfer Interface module**

Table 5-7 Ship Transfer Interface module Known Issue and Solution

Known Issue	Solution
Error 'Duplicate reject trans'	Turn off the checking on XENTA device from Menu, Administer, Change Params, General Use, Duplicate.
Error 'Automation Error. The Specification module could not be found'	The PAYPOINTAPI.dll is missing or corrupted. Replace the new PAYPOINTAPI.dll into Oracle Hospitality Cruise folder.
Error 'paypoint.dll open failed'	The remote shore host does not match the Paypoint terminal IP address.
Do not pick up the settlement transaction to process	<ul> <li>Possible due to initial authorization is missing, or status is outstanding.</li> <li>Check on CCA_PREVIOUS and CCT_CCA_ID for further investigation.</li> <li>Check the Paypoint.log for further investigation.</li> </ul>
Do not pick up the authorization transaction	<ul> <li>Check the Paypoint.log</li> <li>CCA_QSTATUS must less than 3.</li> <li>CCA_STATUS have to be 0.</li> <li>Authorization not able to process due to invalid characters found in the transaction string, for example "ñøôñ÷à ï÷éøîà'</li> <li>2015-05-07 05:12:34.373 ERROR Illegal additional transaction data</li> <li>2015-05-07 05:14:34.511 DEBUG TransData (type 49):</li> <li>300000;4;ñøôñ÷à</li> <li>ï÷éøîà;A000000025010402;526542;;;;;</li> <li>2015-05-07 05:14:34.511 DEBUG TransData (type 50): 1164347</li> <li>The characters highlighted in yellow are the invalid characters returned by Paypoint service.</li> <li>The characters highlighted in green refers to CCA_ACC_ID.</li> <li>Open Oracle SQL Developer, and filter the CCA_ACC_ID transaction.</li> <li>Locate the initial authorization (CCA_OPERATION = 1), then identify the column CCA_LOCALMODEDATA where the transaction data will be saved in this column.</li> <li>Edit and remove the invalid character, commit the changes.</li> <li>Go to Ship Transfer interfaces and click Applyto initial the authorization process again.</li> </ul>



6

# NCL DCC

This document contains the setup and usage of Credit Card Transfer for NCL DCC (Dynamic Currency Conversion) Handling.

#### Prerequisite, Supported Systems, and Compatibility

This section describes the minimum requirements to use the NCL DCC Handling.

#### **Prerequisite**

- OHC Credit Card Transfer.exe
- OHC Tools.exe
- SPMS Parameters

#### Compatibility

SPMS version 20.1 or later. For customer operating on version below 20.1, database upgrade to the recommended or latest version is required.

### SPMS Parameters NCL DCC

This section describes the **parameters** available to Credit Card Transfer module and they are accessible in the **Administration module**, **System Setup**, **Parameter**.

Table 6-1 PAR\_GROUP General

PAR Name	PAR Value	Description
Enable Signature Capture for Credit Card	0 or 1	0 - Disables Signature Capture for Credit Card.
		1 - Enables Signature Capture for Credit Card.
Credit Card DCC Confirm Message	0 or 1	0 - Disables Credit Card DCC (Dynamic Currency Conversion).
		1 - Enables Credit Card DCC (Dynamic Currency Conversion).
Credit Card DCC Message		&Guest Currency Choice &&Your Card Billing Currency: <xxx> &amp;&amp;Current Rate of Exchange: <yyy> &amp;Rate includes 3% margin &amp;&amp;Select the currency your charges will be finalized in.</yyy></xxx>



Table 6-1 (Cont.) PAR\_GROUP General

PAR Name	PAR Value	Description
Credit Card DCC Route Message		&The guest named below: &Name as it appears on the card: & <cname> &amp;&amp;Credit Card No.: &amp; XXXX XXXX XXXX <no> &amp;will pay for all charges made by the &amp; Following guest(s) during their onboard vacation: &amp;&amp;Cabin: Guest Name: &amp;</no></cname>
DCC Base Country		Leaves as blank.
Enable Credit Card DCC	0 or 1	0 - Enables Credit Card DCC. 1 - Disables Credit Card DCC.

Table 6-2 PAR\_GROUP Interfaces

PAR Name	PAR Value	Description	
Enable Add-on DCC	NOVATE	CC Provider that supports Addon DCC. For example: Novate.	
Batch CCard Processing Format	NCL	Specifies the message format to be generated by OHC Credit Card Transfer.	
CC Auth/Settlement Folder	Folder path	Repository location for authorization/settlement files generated by OHC Credit Card Interface.	
		Note: To avoid adverse impact on your system, please abstain from using the following folder path:	
		<ul><li>System Directory</li><li>"\Users\Public\Documents\O racle Hospitality Cruise"</li></ul>	

# **Configuring SPMS**

This section describes the program setup within the **Administration module** and **Management module**.

#### **Prerequisite for Program Setup**

The Verifone card device requires the vFormAgent.dll and Interop.vFormAgent.dll. These files are downloaded automatically from XAPP into Oracle Hospitality Cruise folder after you run the OHC Launch Panel.

You have to run the OHC Database Installer to ensure you have the latest program files. The device also requires below forms and you can obtain these from Oracle Support.



- DCCLBL.frm
- DCCCONFIRMLBL.frm
- SIGNATURE.frm
- 925 SWIPE CARDONLY.frm
- WELCOME.frm
- ROUTING.frm

### Hardware Setup

Before you begin using the Verifone device, you must configure the device connection in the **Management module**.

- 1. Start the Management module and select the **Options** menu.
- 2. Navigate to the **Hardware tab** of the **Options** screen.
- 3. At the Card Reader/Encoder #1 section, select the Card Reader Type as **Verifone MX925**. The port details are shared with Signature Capture, defined in the next step.
- The port details need to be defined as per below setting, similar to Port properties configured in My Computer, Device Manager.

a. Speed: 115200b. Data bits: 8

c. Parity: None

d. Stop Bits: 1

- 5. Click **Apply** and close the Hardware Option screen. The Verifone device downloads the required pre-loaded forms and prompt 'File successfully downloaded' upon completion.
- Re-open the Hardware tab and verify that the port number no longer appears in the Port Number column.
- 7. If a Signature Capture device is used during the credit card registration, assign the device at the Hardware Option under Signature Device. Both the Verifone MX925 Card Reader Type and Signature Capture share the same Port setting.
- 8. Close the **Hardware Option**screen and restart OHC Management. The device downloads and installs the required forms upon the program startup. Below are the indicators for the process.
  - Signal is caught screen: This mean the Verifone device is detected.
  - Form Agent screen: Forms are being loaded from the device.
  - **System Information screen:** Displays the configuration information.
- If the port number is wrongly assigned or the device is not properly connected, a
  message box prompts during program startup. Check if the device is connected and the
  DLL are properly registered.

vFormAgent.dll & interop.vFormAgent.dll is not updated.vFormAgent.dll & interop.vFormAgent.dll is not registered properly.



## System Configuration NCL DCC

This section describes the various system codes setup within the **Administration** module.

#### **Department Setup**

A debit/credit department code of a credit card type is required for charge/posting, which is set up in the **Administration module**, **Financial Setup**, **Department setup**.

#### Credit/Debit Card Department Code Setup

- Log in to the Administration module and select Financial Setup, Department setup from the drop-down list.
- 2. Click the **New** button to create a Sub-Department code.
- 3. At the **Main Department section**, enter the credit/debit card information such as Payment type, Department Code, and Description.
- 4. At the Payment Type details section,
  - Enter the two digits of the first set of the credit card number in Credit Card digit.
  - b. Enter the Credit Card ID, for example, MC MasterCard, VI Visa, etc.
  - c. Select the corresponding Credit Card Internal ID from the drop-down box.
  - d. Enter the Credit Card Merchant Number provided by the Service Provider.
  - Select the Commission department from the drop-down list and update the commission rate in percentage.
  - f. Check the **Debit Card No Commission** charge if the commission is not applicable to debit card.
- At the **Department Security** access, select the relevant security level from the drop-down box.
- At the **Department Security** access, select the relevant security level from the drop-down box.
- 7. Click **OK** to save.

### Setting up Receipt

A receipt can be generated upon payment, which requires a report template to be set up. A Standard Credit Card receipt template is available in the **Administration module**, **System Setup**, **Report setup**, **\_Receipts group**. Please contact Oracle Hospitality Cruise Support if you would like to configure a customized receipt format.

### Importing Credit Card BIN

In order for the program to determine the correct card type (Credit/Debit) and its handling, you must mport a Credit Card Bank Identification Numbers (BIN) in the file into SPMS. This file contains the complete set of eligible BIN range and is provided periodically by ELAVON. When the BIN file reloads, all previously loaded information is overwritten during the process.



### Loading the BIN File

- to the Administration module and select Financial SLoginetup, Import Credit Card Bin file.
- Locate and select the latest BIN File from the folder. For example, see section Sample BIN file



Figure 6-1 Credit Card BIN Import Screen

3. The BIN file information populates in the Credit Card BIN Import screen. Click **Import** to save the BIN ranges into the BIN table and **Close** to exit.

## Setting up PGP Encryption

The PGP Encryption is a Payment Application Data Security Standard (PA-DSS) Compliant requirements. Its aims to prevent any third parties from storing prohibited secure data including credit card track data, card validation codes or pin block data, therefore minimize the potential security breaches leading to compromising the full magnetic stripe data, card validation codes or pin block data. The encryption is performed using OHC Tools by way of uploading a PGP key pair, which is then used to encrypt and decrypt the authorization file in OHC Credit Card Transfer.

1. Run OHC Tools and select **Upload PGP Key** to upload PGP key pair for DCC handling.

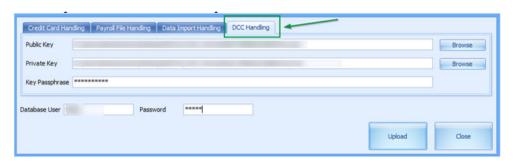


Figure 6-2 OHC Tools Menu




- 2. At the PGP Key Uploaded screen, navigate to the DCC handling tab.
- 3. Browse for the bank public key (file format is .pkr) under **Public Key column**.
- 4. Browse for the secret key (file format is .skr) under **Private Key column**.
- 5. Enter a **Key Passphrase** if the key pair is generated with a passphrase.
- **6.** Enter Ship's database username and password.

Figure 6-3 PGP Key Uploader — DCC Handling Tab



- Click the Upload button to begin the key upload for DCC Handling.
- Upon successful upload, the system prompts a message box. Click OK to close and exit.

Figure 6-4 Successful PGP Key Upload Prompt



### Using the Verifone Card Device


This section describes the usage of the Verifone device in AQCI, Management module, and Credit Card Transfer Program.

#### **OHC Management**

To register a credit card using a Verifone device in the Management module, follow the steps below:

- **1.** Start the **Management** module.
- 2. From the main menu, select Cashier then Guests.
- Select a checked-in guest and click Get Credit Card button in the Guest Handling screen.
- **4.** The system will prompt a message requesting the card to be swiped. Swipe the card through the card slot of the card device.
- After the card is swiped, the credit card information and its status are reflected on the credit card entry. If the credit card is valid, the credit card accepted status is shown on the screen.

Figure 6-5 Credit Card Entry Details

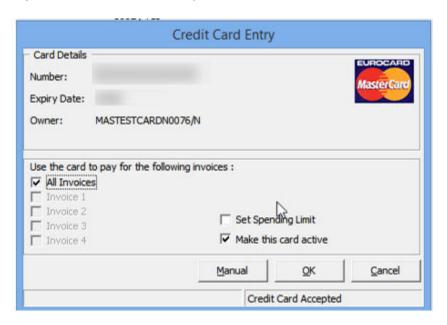

6. The processing screen displays during the credit card registration in the Credit Card Entry screen.

#### Note:

The Currency Exchange rate used refers to the DCC table and exchange rate imported from the authorization response file.


If the credit card is eligible for Dynamic Currency Conversion (DCC) and is within the DCC BIN range, the program prompts the DCC handling message box, followed by the currency selection screen

- Select the available Card Billing Currency for the credit card to enroll into the DCC handling prompt for acknowledgement of the DCC's Term and Conditions clause on the card device.
- 8. Click the **Decline** prompt on the device to terminate the credit card enrollment and save the credit card data into the database. Before saving the credit card data, it will prompt for signature if the **Enable Signature Capture for Credit Card** parameter is enabled.




Click Accept enroll the credit card in DCC Handling. The system prompts a confirmation to save the credit card data. Click Yes to proceed.

Figure 6-6 Message box — DCC Confirmation

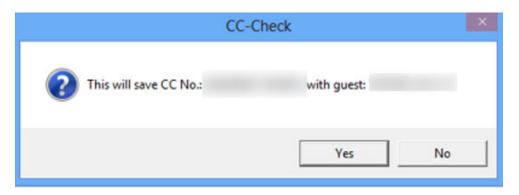

- **10.** If the **Credit Card DCC Route Message** parameter is enabled, a routing message appears on the device.
- 11. Click the **Accept** button to accept the routing for the other guest or **Decline** if there is no routing for this guest.
- 12. To use the Signature Capture feature, the **Enable Signature Capture for Credit**Card parameter and the Signature screen will prompt when the card is registered at both the Management module and the device.

Figure 6-7 Signature Screen at Module

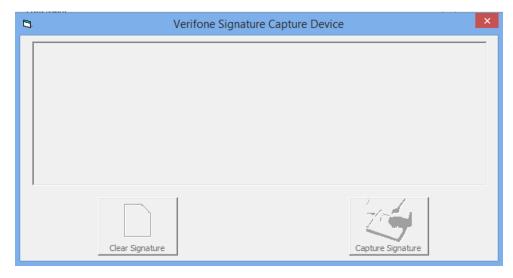


- 13. After the guest places their signature on the device, click Enter to complete the credit card registration process. If Cancel is pressed, you will receive a No Signature Received promptly in Guest Handling screen.
- **14.** A **Transaction Completed** screen appears on the device when the registration completes or **Transaction Cancelled** appears when the **Cancel** button is pressed.
- **15.** The signature captured is shown on the signature screen. Clicking the **Clear Signature** button resets the signature and allows the guest to place a fresh signature.




- **16.** Click the **Capture Signature** button to complete the credit card registration on the guest account.
- **17**. Click **OK** at the registration complete prompt to return to the previous screen.
- 18. The registered credit card details are stored in the Credit Card tab of Guest handling screen, with the DCC column flagged with 'Y' when the card is enrolled with DCC. At the Signature Captured column, the signature captured during the credit card registration is shown. The program does not allow credit card registration without a signature when Enable Signature Capture for Credit Card parameter is enabled.

Figure 6-8 Guest Handling Credit Card Screen

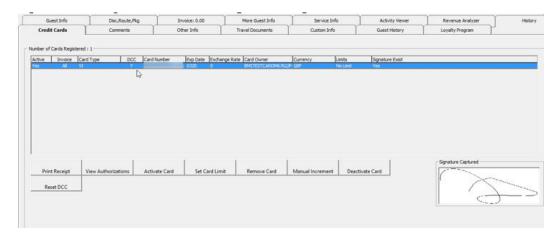

19. For DCC handling, the following message box will prompt when the 'Card Reader Type' is assigned to a magnetic swipe device. This shows that the credit card is eligible for DCC enrollment.

Figure 6-9 DCC Enable Screen — Manual Card Swipe

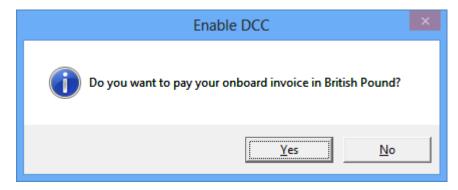

Click Yes to enroll the DCC handling or No to register the credit card without DCC handling.


### OHC Advanced Quick Check In

- 1. Run OHC Advanced Quick Check In (AQCI).
- 2. At the ribbon bar, select the **Setup tab, General Setup**, **Hardware tab**.



- 3. At the **Hardware** tab, Card Reader #1 section, a port number is assigned. The port number in AQCI always shows the assigned port number that is different from OHC Management.
- 4. Select the device from the drop-down list. The **Get Credit Card** button is enabled at the ribbon bar after you assigned the device.
- 5. Clicking the **Get Credit Card** button after selecting a checked-in passenger will prompt a **Please Swipe Card** notification on AQCI screen.
- After the card is swiped, the credit card details populate in the respective field of Credit Card Details section.



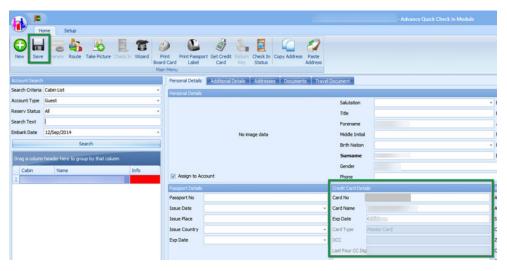

7. Click Save to proceed with the registration. If the credit card is eligible for DCC (Dynamic Currency Conversion) enrolment, the system prompts the DCC handling message, requesting you to select the currency on the device.

#### Note:

The Currency exchange rate used refers to the rate in DCC table, an exchange rate imported from the authorization response file.

If the credit card is eligible for Dynamic Currency Conversion (DCC) and is within the DCC BIN range, the program prompts the DCC handling message box, followed by the currency selection screen.

- 8. Select the available Credit Card Billing Currency to enroll the card in DCC handling. At the DCC Term and Conditions notification prompt, have the guest read and **Accept** the Terms & Condition on the device. Pressing **Decline** terminates the card enrollment and saves the credit details into the database. You are prompted to place a signature on the device if **Enable Signature Capture for Credit Card** parameter is enabled.
- **9.** At the AQCI screen, select **Yes** at the confirmation to write the card details into the database.




- 10. If the Credit Card DCC Route Message parameter is enabled, a routing message displays on the device. Click Accept to route to another guest or Decline if no routing is required.
- 11. Have the guest place the signature on the device signature screen and press **Enter** to complete the card registration. The guest signature is captured and shown on AQCI screen. Click the **Capture Signature** to save and complete the registration.
- 12. Clicking the **Clear Signature** button erases the signature, allowing the guest to replace the signature. This prompts a **No Signature Received** on AQCI screen and Transaction Cancelled on the device.
- 13. The registered credit card details are stored in the Credit Card tab of Guest handling screen, with the DCC column flagged with 'Y' when the card is enrolled with DCC. At the Signature Captured column, the signature captured during the credit card registration is shown. The program does not allow credit card registration without a signature when Enable Signature Capture for Credit Card parameter is enabled and you are required to configure the device in hardware option setup.
- 14. For DCC handling, when the 'Card Reader Type' is assigned to magnetic swipe (not Verifone device), the system prompts a message if you would like to settle the invoice in xxx currency. This shows that the credit card is eligible for DCC enrolment.
- 15. Click Yes to enroll the DCC handling or No to register credit card without DCC handling.

### **OHC Credit Card Transfer**

An Authorization file can be generated using one of this option:

- DCC New Incremental File: For credit card enrolled with DCC Handling.
- New Incremental File: For normal credit card registration that is not enrolled with DCC Handling.

Figure 6-11 OHC Credit Card Transfer — Authorization Menu



When the PGP Key Pair does not exist in the database, and the **Process** button is clicked, a message box per the following figure will prompt prohibiting you from generating an authorization file.



CCardAuthorizationInterface

The Credit Card public key for PGP is not exist in the database. Please upload a public key to generate or read the file.

OK

CCardAuthorizationInterface

The Credit Card private key for PGP is not exist in the database. Please upload a private key to generate or read the file.

OK


Figure 6-12 PGP Does Not Exist Message Prompt

### **Batch File Processes**

#### **Generating an Initial Authorization**

 At the Authorization menu, click the DCC New Incremental File to list all the credit cards requiring authorization that are flagged with DCC= "Y" on the DCC Credit Card Authorization Write screen.

Figure 6-13 DCC Credit Card Authorization Write Screen

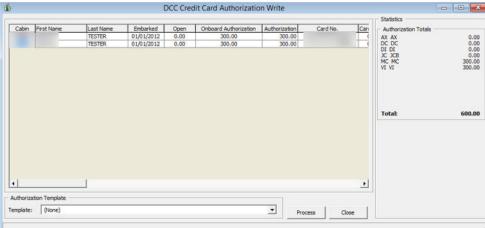






The initial authorization amount refers to Minimum Authorization in Credit Card Financial Setup.

2. After you click the **Process** button, an Authorization file is generated and encrypted with a PGP key.

Figure 6-14 Sample PGP Encrypted Authorization File

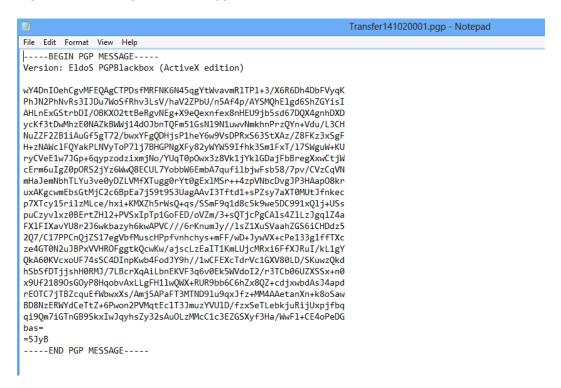

 Status for the pending approval authorization transaction is Outstanding, and the transaction can be traced in Management module, Guest handling, Credit Card tab, View Authorization.




ō Manual Credit Card Authorization Authorizations Details Card Number Value Status Type Authorizations Payment Type Pending Value: 300.00 Declined Value: 0.00 Authorized Value: Authorization Authorization

Figure 6-15 Credit Card Authorization in Management module

## Reading an Authorization

- 1. After you have obtained the response file from the merchant, at the **Authorization** menu, select **DCC Read Increment File**.
- 2. Click the **Open File** button and locate the response file from the merchant.
- 3. If the response file is not encrypted, an alert message box will prompt. Select the appropriate response.

Figure 6-16 Non-encrypted Response File

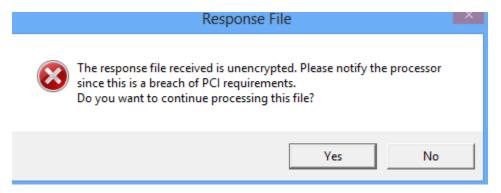

**4.** You will receive a batch with currency exchange rate provided by the merchant. See the figure below for sample.

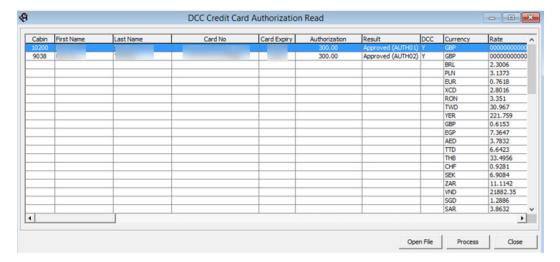


Figure 6-17 Sample Response File with Currency Exchange Rate



Click the **Process** button to continue and this populates the authorization transactions onto the grid.

Figure 6-18 DCC Credit Card Authorization Read Screen with Data



- 6. Click the **Process** button again to begin the process. The progress status appears on DCC Credit Card Authorization Read screen.
- 7. After the authorization completes, the authorization status in **Guest Handling, Credit Card tab, View Authorization** is updated to **Authorized**, with the exchange rate provided in the response file. The exchange rate is also stored in the DCC table.



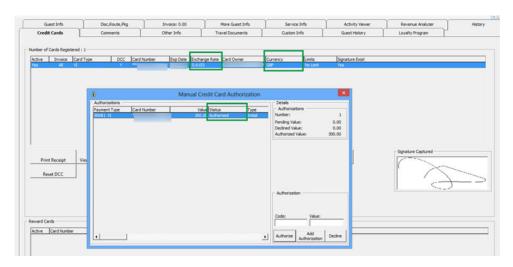


Figure 6-19 OHC Management — Credit Card Tab

### Generating an Incremental File

When the total posting amount is more than the initial authorization, an incremental authorization is required. For example, additional posting is at \$370 and the initial authorization is \$300. The incremental authorization will be \$70.

 At the DCC Credit Card Authorization Write screen, a converted (Onboard Authorization \* Currency Exchange Rate) pending authorization transaction is listed. Click the Process button to write the authorization transactions into the file.

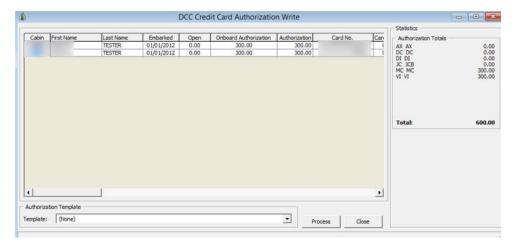


Figure 6-20 DCC Credit Card Authorization Write

- 2. In the **Guest Handling, Credit Card, View Authorization** screen, the status of the unconverted incremental authorization amount is listed as *Outstanding* status.
- 3. To change the status to Authorize, see *Reading an Authorization*.



Manual Credit Card Authorization Authorizations Details Authorizations Value Status Payment Type Card Number Type 90071 MC 300.00 Authorized Number: 2 Initial Pending Value: 70.00 Declined Value: 0.00 Authorized Value: 300.00 Authorization Code: Add Authorize Decline

Figure 6-21 View Authorization with Incremental Authorization — Pending Approval

# Generating Incremental File with Authorization Template

An Authorization Template is used to obtain additional authorization amounts. The template only applies to Incremental Authorization. Use the following steps to set up the Authorization Template.

1. At the Authorization menu, select **Level Criteria Setup**from the drop-down list.




Figure 6-22 OHC Credit Card Transfer — Authorization

 Configure the Authorization template in value amount. For example, see Figure 6–22 — Sample Level Criteria Setup in Value.




- Define the credit card type (VI Visa).
- Define the Level ID (02)
- Define the Account Balance (999999)
- Define the Value/Percentage (100)

Figure 6-23 Sample Level Criteria Setup in Value

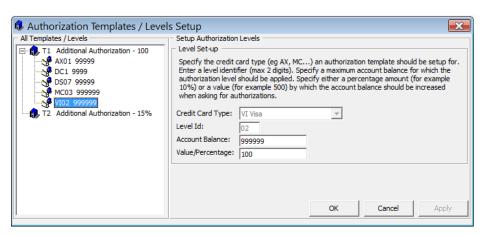

- Configure the Authorization template in percentage. For example, see Figure 6–23
   — Sample Level Criteria Setup in Percentage.
  - Define the credit card type (VI Visa)
  - Define the Level ID (05)
  - Define the Account Balance (999999)
  - Define the Value/Percentage (15%)

Figure 6-24 Sample Level Criteria Setup in Percentage

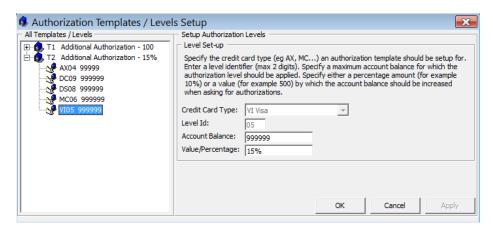

- 4. The following are formulas used in **Authorization Template** calculations:
  - For Value Amount
    - If current balance > 0 = (Total Posting Total Approved Authorization Amount) + Level Amount



- If current balance < 0 = (Level Amount Open balance)</li>
- For Percentage
  - (Total posting Total approved authorization) + (current balance + percentage%)


In the following scenario,

- Current Balance = -10
- Total Approved Authorization Amount = 50

Authorization Template: Value Amount

- Template: Additional Authorization \$100
- Result: (-10 + 100) 50 = 40
- \*\*Authorization amount converted with exchange rate = 40 \* 0.6153 = 24.61

Figure 6-25 DCC Credit Card Authorization Write with Authorization Template

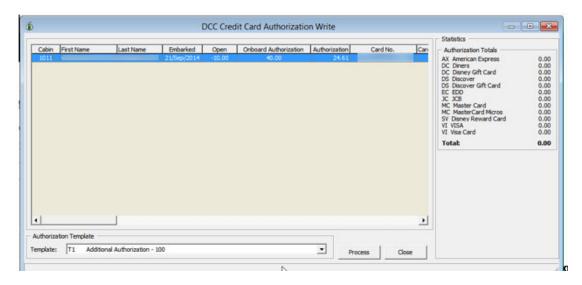

Authorization Template: Percentage

- Template : Additional Authorization 15%
- Result : (-10 50) + (-10 \* 15%) = -61.50
- Negative Authorization amount/value will not be process

## Generating Settlement File

1. After a settlement is performed on a guest account, the settlement transaction requiring approval becomes listed under DCC New Settlement file.


Figure 6-26 OHC Credit Card Transfer — Settlement Menu





2. At the **Settlement Menu, DCC New Settlement** screen, the settlement transaction is flagged with DCC, and the amount shown is converted using the exchange rate from the DCC table. (Onboard Settlement \* Currency Exchange Rate).

Figure 6-27 DCC Credit Card Settlement Write Screen (With Settlement Transaction)

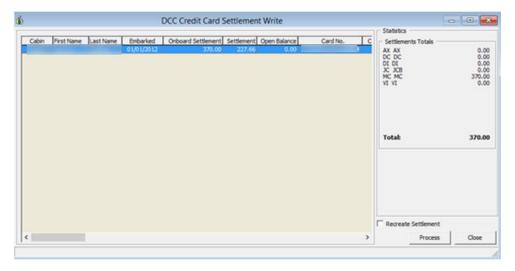

3. Click the **Process** button to write the settlement transaction into the settlement file.




The NCL Credit Card format does not read the settlement response file. Hence the CCT\_STATUS is updated to '1' upon generation of the settlement file.

# Recreating a Settlement File

This function allows you to recreate the settlement file.


1. Click the Recreate Settlement from the Settlement menu.

Figure 6-28 Settlement Menu — Recreate Settlement

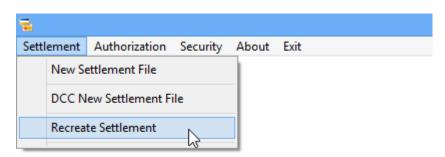


At the Restore Settlement Data screen, select a Transfer Date to recreate and click Process.

Figure 6-29 OHC Credit Card Transfer — Recreate Settlement Screen



3. At the DCC Credit Card Settlement Write screen, select the Recreate Settlement checkbox to list the transaction.

Figure 6-30 DCC Credit Card Settlement Write Screen — Recreate Settlement Checkbox

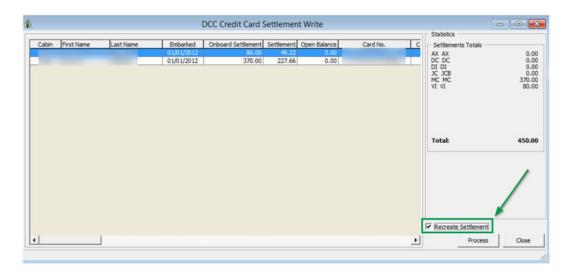

# Mapping Fields

This section lists the mapping format used in NCL DCC Credit Card.

#### **Request File Format**

Transfer161108006.pgp

Transfer<DATE><SEQ#>.pgp

Table 6-3 Request File Format Detail

Name	Description
	Transfer - Authorization file.
Transfer	Settle - Settlement file.



Table 6-3 (Cont.) Request File Format Detail

Name	Description
161108	Creation date.
006	Sequence number of authorization/settlement file.
.pgp	File name extension.

**Table 6-4 Transaction Record Detail** 

Field	Start	End	Size	Comment
Account No	1	7	7	Generated when authorization or settlement file is created by OHC Credit Card Transfer. (CCA_ID, CCT_ID)
Trans. Type	8	10	3	Hardcoded -
11011011) po		10	J	OBC
Method of Pmt.	11	12	2	Hardcoded - AX- Amex, MV-Visa/ Master, D- Discover
Credit Card No.	13	28	16	CRD_NO
Blank	29	29	1	Blank
Crdt Card Seq no	30	33	4	Hardcoded - 0001
Company	34	35	2	Hardcoded - 01
Blank	36	36	1	Blank
Ship No.	37	38	2	Parameter > DCC Ship ID
Reply Code	39	39	1	A-Approved, H- Refund, S- Settled, D- Denied, W-Wait, E-Error, C-Call back, X-Deleted, ''-None, R-Reject (CCA_CRED_SOU RCE / CCA_CRED_RESP ONSE)
Response Code	40	45	6	Authorization number provided in authorization response file (CCA_AUTH_REF ERENCE)



Table 6-4 (Cont.) Transaction Record Detail

Reservation no.	46	54	9	RES_V_GUESTID
Group No	55	60	6	Space
Cruise no	61	68	8	Read ship number from parameter (DCC Ship Id) + SCR_A_DATE
Cruise Segment	69	70	2	Space
Blank	71	71	1	Blank
Sailing date	72	77	6	Format : YYMMDD (SCR_A_DATE)
Blank	78	78	1	Blank
Amount	79	88	10	CCA_AMOUNT - Authorization amount CCT_AMOUNT - Settlement amount CCA_CUR_AMOU NT - to track value written to authorization / settlement file
Blank	89	89	1	Blank
Cdt Card Expiry	90	93	4	Credit card expiry date (Format : MMYY)
Last Name	94	108	15	UXP_A_NAME
First Name	109	118	10	UXP_A_FSTN
Authentication Code	119	127	9	Blank
Authentication Source	128	128	1	5-Approval, D- Referral, E- Offline Approval. (CCA_CRED_RES PONSE / CCA_CRED_SOU RCE)
Interface Cmd	129	133	5	CAUTH - Authorization CSETL - Settlement
Card track 1	134	212	79	Blank
Card track 2	213	252	40	Blank



Table 6-4 (Cont.) Transaction Record Detail

Message	253	282	30	Use only when declined - CCA_NONAPPRO VAL_TEXT
Auth ACI Code	283	284	2	Blank
Tran ID	285	299	15	CCA_REPLY017T O122
Validation Code	300	303	4	CCA_REASON
Transmit Status	304	304	1	Blank
Request Type	305	305	1	A-Authorization, I-Incremental, I- Settlement
Blank	306	306	1	Blank
CTD Auth Amount	307	316	10	Hardcoded - 0
Blank	317	317	1	Blank
Initial Auth Amount	318	326	10	CCA_AMOUNT
Blank	327	328	2	Blank
Init Auth Date	329	334	6	CCA_BDATE
Blank	335	335	1	Blank
Init. Auth. Time	336	341	6	CCA_BDATE
DCC Opt In	342	342	1	1 - DCC, 0 - Not DCC (CRD_DCC)
DCC Currency Ind.	343	345	3	CRD_CUR
DCC Exchange Rate	346	356	11	CCA_RATE
DCC Control Number	357	396	40	CCA_CTLNO

Table 6-5 Exchange Rate Record Detail

Field	Start	End	Size	Comment
Base currency code	1	3	3	Currency code is in ISO 4217 format. (DCC_BASE)
Foreign currency code	4	6	3	Currency code is in ISO 4217 format. (DCC_CUR)
Exchange rate	7	19	13	DCC_EXRATE
Rate issue date	20	33	14	DCC_DATE
Rate expiry date	34	47	14	DCC_EXP_DATE



Table 6-5 (Cont.) Exchange Rate Record Detail

Field	Start	End	Size	Comment
Exchange rate source name	48	79	32	Specifies the source of the exchange rate
Commission percentage	80	86	7	Reserved for the purpose of meeting regulatory requirements where applicable. Space if not present.
Exchange rate source timestamp	87	100	14	Format yyyymmddhhm mss.

#### Sample BIN file

Below are the BIN range samples provided periodically by the bank. VOL120110427162858 4000790643RUB 4001020986BRL 4001030032ARS 4001040032ARS 4001150826GBP 4001210978EUR 4001310978EUR 4001360986BRL 4001450937VEF 4001540710ZAR 4001590376ILS 4001620986BRL 4001630986BRL 4001680986BRL 4001700986BRL 4001740986BRL 4001760986BRL 4001780986BRL 4001820986BRL 4001840986BRL 4001850986BRL 4001870986BRL 4001880978EUR 4001900978EUR 4001910986BRL 4001920578NOK 4001990986BRL 4002010901TWD 4002110901TWD 4002160578NOK 4002170986BRL 4002230410KRW 4002250986BRL 4002270985PLN 4002340986BRL 4002350986BRL 4002360986BRL 4002370986BRL 4002380986BRL 4002390986BRL 4002420986BRL 4002430986BRL 4002450986BRL 4002470986BRL 4002480986BRL 4002490986BRL 4002520986BRL 4002530986BRL 4002540986BRL 4002580214DOP 4002670214DOP 4002680986BRL 4002710978EUR 4002720978EUR 4002760032ARS 4002770578NOK 4002800978EUR 4002810978EUR 4002870643RUB 4002880578NOK 4002910784AED 4002930978EUR 4003020978EUR 4003080214DOP 4003090214DOP 4003110978EUR 4003120978EUR 4003140978EUR 4003150978EUR 4003160978EUR 4003170978EUR 4003320978EUR 4003330978EUR 4003340978EUR 4003350978EUR



4003400780TTD 4003530901TWD 4003550901TWD 4003560901TWD 4003570901TWD 4003580344HKD 4003590901TWD 4003610901TWD 4003890344HKD 4003990682SAR 4005240203CZK 4006010414KWD 4006050484MXN 4006080170COP 4006090036AUD 4006120344HKD 4006150032ARS 4006250986BRL 4006260826GBP 4006270643RUB 4006280643RUB 4006310780TTD 4006340986BRL 4006350986BRL 4006360986BRL 4006450986BRL 4006460986BRL 4006470986BRL 4006430986BRL 4006450986BRL 4006460986BRL 4006470986BRL

Table 6-6 OHC Tools Known Issue and Solution

Known Issue	Solution
Error - 'Key unable to upload'	Register PGPBBox7.dll with regsvr32.exe again.
Error - 'License Key has not been set'	Register PGPBBox7.dll with regsvr32.exe again.

Table 6-7 OHC Credit Card Transfer Known Issue and Solution

Known Issue	Solution
OHC Credit Card Transfer doesn't reflect the correct credit card format.	Check the credit card format in System Parameter in Administration module under System Setup, Database Parameter, Interfaces, Batch CCard Processing Format.

Table 6-8 OHC Management Known Issue and Solution

Known Issue	Solution
Error - 'Please check if Verifone device dll is registered or device is connected'.	Ensure the Verifone device is connected with the workstation.

