

Oracle Hospitality OPERA Cloud Gaming Integration User Guide



Release 24.7
G22753-02
March 2025

ORACLE®

Copyright © 2023, 2024, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

1	Overview	
2	Summary of the Operations	
3	High Level Architecture	
4	Prerequisites	
5	OPERA Cloud Connectivity Agent	
	System Requirements	5-1
	JDK Version, Operation System, and Heap Size Requirements	5-1
	Networking Requirements	5-2
	Backup and Antivirus Information	5-2
	Patching and Updates	5-2
	High Availability Mode	5-2
	Installation Steps	5-2
	Run the Agent as a Service	5-4
	Install/Update Certificates on the Agent	5-11
	Restart	5-11
	JDK Upgrade and Keystore Migration	5-13
	Download JDK17 for Microsoft Windows	5-13
	Install Java for Microsoft Windows	5-13
	Download JDK17 for Linux	5-15
	Install Java for Linux	5-16
	Convert the JKS KeyStore and Restart the Agent	5-16
6	Gaming Integration Configurations	
	OPERA Cloud Controls	6-1
	Membership Management	6-2

Rate Management	6-4
Gaming Vendor Specific Configurations	6-4
Aristocrat Oasis	6-4
Comp Accounting	6-7
OPERA Cloud Outbound Configuration for Aristocrat Oasis	6-8
DVMs for Aristocrat Oasis	6-11
Business Events	6-64
IGT	6-65
OPERA Cloud Outbound Configuration for IGT	6-69
DVMs for IGT	6-72
Credit Account	6-126
Business Events	6-127
OPERA Cloud Flex Fields	6-131
Aristocrat Loyalty	6-131
OPERA Cloud Outbound Configuration for Aristocrat Loyalty	6-133
DVMs for Aristocrat Loyalty	6-136
Business Events	6-154

Preface

Oracle Hospitality OPERA Cloud Gaming Integration users are authorized to access the following modules and features:

- Oracle Hospitality OPERA Cloud Gaming Integration

Purpose

This guide describes the required prerequisites and configurations that enable OPERA Cloud to communicate with your PTS.

Audience

This guide is intended for customers and partners who use Oracle Hospitality OPERA Cloud Gaming Integration.

Customer Support

To contact Oracle Customer Support, access the Customer Support Portal at the following URL:

<https://iccp.custhelp.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screenshots of each step you take

Documentation

Oracle Hospitality product documentation is available on the Oracle Help Center at <http://docs.oracle.com/en/industries/hospitality/>.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <http://www.oracle.com/pls/topic/lookup?ctx=acc=docacc>.

Revision History

Date	Description of Change
December 2024	Initial publication
March 2025	Removed content from the table in Aristocrat Oasis section.

1

Overview

The OPERA Cloud Service Casino and Gaming Management component or Gaming Integration is an add-on to OPERA Cloud Services to enable integration with your Patron Tracking System (PTS).

The supported operations depend on your Patron Tracking System (PTS), but generally there are two types of operations supported:

CRM Operations

Customer Relationship Management (CRM) enables you to query or push the available player information in your PTS directly from OPERA Cloud and consists of the following operations:

- Player Lookup to search for a player in the PTS. This can be done using the first and/or last name.
- Player Download to save specific player information in OPERA Cloud.
- Player Statistics to see (in OPERA Cloud) the statistics of the player saved in the PTS.
- Player Enrollment to enroll the guest in the PTS system as a player.
- Player Offers to validate if an offer in the PTS is valid for that player for a specific reservation dates.
- Profile Updates to PTS, to update or create profile information on the PTS system
- Reservation Notifications, to notify the PTS system about reservation creation or changes

Cashier Operations

Cashier operations enables you to post comps to your PTS from OPERA Cloud and consists of the following:

- Comp Redemption — Enables you to send redemptions to one of the pre-configured buckets (or account types) in your PTS. The current balance of the pre-configured buckets will appear in OPERA Cloud. You can also reverse a redemption that has been redeemed.
- Comp Posting — Enables you to post discretionary comp transactions to the PTS from the guest's OPERA Cloud folio. You can reverse these postings if needed.
- Async Comp Posting, for bulk processing a list of comp posting transitions, normally used in the end-of-day process

This guide describes the required prerequisites and configurations you must follow to enable communication between OPERA Cloud and your PTS.

2

Summary of the Operations

Table 2-1 Summary of Operations


































Operation	IGT ADI	Aristocrat Oasis	Aristocrat Loyalty
Player Enrollment			
Player Lookup			
Player Download			
Player Statistics			
Player Offers			
Profile Update to PTS			
Reservation Notifications			


Table 2-1 (Cont.) Summary of Operations

Operation	IGT ADI	Aristocrat Oasis	Aristocrat Loyalty
Comp Posting (with reverse)			
Comp Posting (with reverse and generates)			
Async Comp Posting			
Comp Redemption (with reverse)			

3

High Level Architecture

This diagram depicts the integration between OPERA Cloud Services and on-premise Patron Tracking Systems (PTS) that are connected by the OPERA Connectivity Agent.

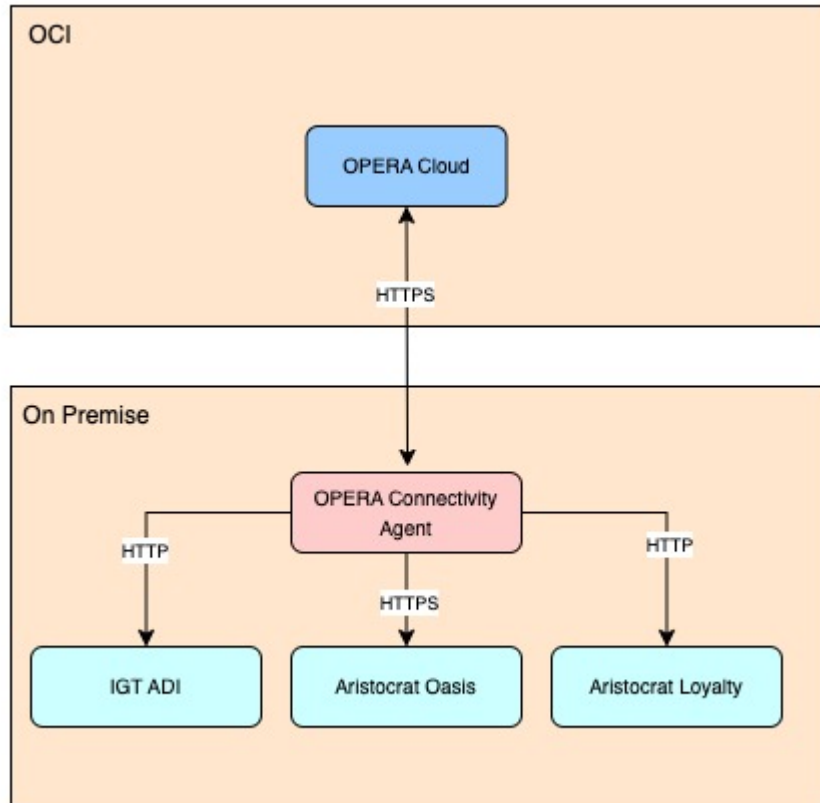

4

Prerequisites

Application Versions

To use the Gaming Integration component, you must comply with the minimum required versions indicated in the table below:

Table 4-1 Application Versions

Application	Minimum Version	Comments
OPERA Cloud	23.5	This is the minimum version supported for gaming integration.
nConnect	1.8.4	Only applicable if your PTS is provided by Aristocrat.
ADI	8.X	Only applicable if your PTS is provided IGT.

System Requirements

When integrating two different applications where one application runs in the cloud and the another runs on-premise, there are some infrastructure and networking requirements that must be met to allow enable this cloud to on-premise integration.

Because OPERA Cloud runs in OCI (Oracle Cloud Infrastructure) and your PTS is predominantly running in your datacenter (either directly or via a hosting agreement), you must have your datacenter configured to enable OPERA Cloud to invoke APIs from your PTS that are unavailable through the internet.

The Oracle Hospitality Connectivity Agent for Gaming Integration is software developed by Oracle to run on your infrastructure. It is responsible for the integration between OPERA Cloud and your on-premise Gaming PTS. This Connectivity Agent for Gaming Integration is software developed by Oracle to run on your infrastructure.

5

OPERA Cloud Connectivity Agent

The Oracle Hospitality Connectivity Agent for Gaming Integration is software developed by Oracle to run on your infrastructure. It is responsible for the integration between OPERA Cloud and your on-premise Gaming PTS.

If your gaming vendor APIs do not have a publicly available endpoint, you must install the OPERA Cloud Connectivity Agent on an environment with access to these APIs to make a connection between OPERA Cloud and your gaming vendor. Considering the supported gaming vendors, if your gaming vendor is IGT, Aristocrat Oasis, Aristocrat Loyalty, or Konami, you must install this agent.

System Requirements

When integrating two different applications where one runs in the cloud and another runs on-premise, there are some infrastructure and networking requirements that must be met to run a software component that will allow this Cloud to On-Premise integration to happen.

Because OPERA Cloud runs in OCI (Oracle Cloud Infrastructure) and, predominantly, your PTS is running in your datacenter (whether directly or via a hosting agreement), you will need to have some configuration done within your datacenter in order to allow OPERA Cloud to invoke APIs from your PTS that are not available through the internet.

The Oracle Hospitality Connectivity Agent for Gaming Integration is software developed by Oracle to run on your infrastructure. It is responsible for the integration between OPERA Cloud and your on-premise Gaming PTS. This Connectivity Agent for Gaming Integration is software developed by Oracle to run on your infrastructure.

JDK Version, Operation System, and Heap Size Requirements

Install and use JDK version 17. To install this version, go to the [JDK Development Kit 17.0.9 downloads](#) page.

The JDK installation can be shared with other products installed on the same host. However, ensure the JDK installation is not modified for use with these other products. Also, to avoid having JDK v17 updated to another version, ensure your host does not have automatic updates for JDK.

Use one of the following operating systems:

- Oracle Linux 6.x
- Oracle Linux 7.x
- Oracle Linux 8.x
- Red Hat Enterprise Linux 6.6
- Red Hat Enterprise Linux 7.x
- Red Hat Enterprise Linux 8.x
- Suse Linux Enterprise Edition 12 SP2
- Microsoft Windows Standard Edition 2016

- Microsoft Windows 2019

**Note:**

IBM or Open JDK are not supported.

Provide a minimum of 8 GB memory with 4 GB of heap size dedicated for the agent JVM. If you want to include any additional processes on that host besides the on-premises agent, it is strongly recommended that you increase physical memory to a value greater than 8 GB.

Networking Requirements

Since this agent is (from a networking perspective) connected to both your on-premise Gaming PTS and OPERA Cloud, the machine on which this agent is deployed must have internet outbound connectivity and connectivity to your Gaming PTS. There is no need for internet inbound connection as all interactions between this agent and OPERA Cloud are always from the agent to Oracle's cloud. Never the other way around.

In regards to the on-premise Gaming PTS system, there must be network connectivity between this agent and the PTS system. This does not mean both must reside on the same subnet, but only requires network connectivity between the two.

This connectivity agent should not be deployed on your DMZ.

Depending on your Gaming PTS vendor, the agent either uses port 80 or port 443 and all traffic is done using HTTPS protocol. Contact your Oracle team for further information.

Backup and Antivirus Information

Oracle does not provide support for customer backups or antivirus. If this agent must be included as part of a backup strategy, the entire agent folder must be considered for that purpose. It is not required for agent folders to be excluded from antivirus configurations.

Patching and Updates

There is no need for you to do any patching or updates for this agent. OPERA Cloud installs patches and updates for the agent in a fully automated manner.

High Availability Mode

To ensure that connectivity between OPERA Cloud and your PTS is not disrupted, it is highly recommended that you install the agent in 'High Availability' mode. High Availability mode means having two agents with the same configuration on two different (virtual) machines.

Installation Steps

You must have the connectivity agent file (this is normally named oic_connectivity_agent.zip) and install it in your on-premise environment. The connectivity agent is also associated with what is called "agent group identifier" and OIC URL. The connectivity agent must also authenticate itself, which requires you to have the agent's credentials. Reach out to your Oracle contact to get the connectivity agent file, your agent group identifier, your OIC URL, and

your agent's respective credentials. You can install the agent on up to two separate environments for redundancy. To do this, repeat the same steps in both environments.

1. Create a directory for the connectivity agent installation on your on-premises host. Consider this folder as the %AGENT_ROOT%.
2. Unzip the connectivity agent file (that is, oic_connectivity_agent.zip) in this folder.
3. Modify InstallerProfile.cfg to include the following information:

```
# Required Parameters
# oic_URL format should be https://<runtimehostname>
oic_URL=https://my-instance.integration.us-phoenix-1.ocp.oraclecloud.com
agent_GROUP_IDENTIFIER=MYGAMINGAGENTGROUP
oic_IDCS_URL=https://idcs-123456789.identity.oraclecloud.com:443
oic_SCOPE=https://QWERTY.integration.us-phoenix-1.ocp.oraclecloud.com:443urn:opc:resource:consumer::all
oic_CLIENT_ID=123456789QWERTY
oic_CLIENT_SECRET=QWERTY123456789

#Proxy Parameters
proxy_HOST=
proxy_PORT=
proxy_USER=
proxy_PASSWORD=
proxy_NON_PROXY_HOSTS=
```

- a. **oic_URL**: This parameter is required. This is the HTTPS URL for the Oracle Integration host. The port is 443.
- b. **agent_GROUP_IDENTIFIER**: This parameter is required. This is the identifier for the connectivity agent group created in Oracle Integration. The identifier name is case-sensitive.
- c. **oic_IDCS_URL**: This parameter is required. This is the HTTPS URL for the IDCS associated with the Oracle Integration host.
- d. **oic_SCOPE**: This parameter is required. This is the scope associated with the security application being authenticated.
- e. **oic_CLIENT_ID**: This is the encrypted value of the security application Client ID for secure persistence necessary for the OAuth authentication.
- f. **oic_CLIENT_SECRET**: This is the encrypted value of the security application Client Secret for secure persistence necessary for the OAuth authentication.
- g. **oic_PASSWORD**: This parameter provides the Oracle Integration password. When the agent runs for the first time, this field will be encrypted in the properties file for secure persistence.
- h. **Proxy Parameters**: These parameters are only required if the connectivity agent is used behind a proxy in the on-premises environment. If you have multiple hosts that need configured in a nonproxy host environment, you must separate each IP address or host with a pipe symbol (|) in the proxy_NON_PROXY_HOSTS parameter. For example: proxy_NON_PROXY_HOSTS=localhost|127.0.0.1|*.myorg.com.

If your proxy user is part of a domain, the user name must include the MS domain name in front of the user name, along with double backslashes before the user name

(for example, MS_domain\username). If you do not specify the double backslashes, you receive a 407 Proxy Authentication Required error.

Note that if you need to add, change, or bypass the non-proxy host configuration after agent installation, do not edit the `InstallerConfing.cfg` file. Proxy host changes made to that file after agent installation do not take effect. Instead, update the host with the `proxy_nonProxyHosts` parameter in the `%AGENT_ROOT%./agenthome/agent/config/CpiAgent.properties` file for your changes to take effect. After editing this file, restart the agent.

4. Open a command line and run the following command to confirm that your default active Java version is 17.

 **Note:**

To comply with Oracle security standards, JDK 8 and JDK 11 are being deprecated for use with the on-premises connectivity agent. You must upgrade to JDK 17 as soon as possible following the instructions in this guide.

```
java --version
```

If you can not set Java 17 as your default active version because you have legacy applications running old Java versions, please navigate to the `bin` folder under the JDK 17 installation folder before running the following commands.

```
# The standdar folder in Windows
cd "C:\Program Files\Java\jdk-17\bin"
# The standard folder in Linux
cd "/usr/java/jdk-17.*"
```

5. Run the connectivity agent installer from the command prompt. Ensure that it does not have any special characters.

```
java -jar connectivityagent.jar
```

6. Wait for a successful installation message to appear. For example:
"Done with Agent installation & configuration... Starting agent for message processing.
Agent started successfully... listening for new messages..."

Run the Agent as a Service

You can now run the agent as a service. This is the preferable way of running the agent because if you run it as a normal process, every time the environment is restarted, the command prompt window is closed or the process is terminated. If this occurs, you must repeat steps 4 and 5 of the [Installation Steps](#).

Linux Installation

This step explains how to run the connectivity agent as a Linux service using `systemd`.

1. After you followed successfully the Installation steps, make sure you stop the running agent by pressing **Ctrl+C** in the command line. Consider that the agent root folder is named `<AGENT_ROOT>`.

2. Create a Linux script named `agentstartup.sh` that triggers the agent startup (see script below). Place this script in `<AGENT_ROOT>`.

```
#!/bin/bash

java -version

cd <AGENT_ROOT>

java -jar connectivityagent.jar
```

3. Replace `<AGENT_ROOT>` with your path. For example, `/home/myuser/connectivity_agent`.
4. After saving the above script, make sure to add the execution permission:

```
sudo chmod +x agentstartup.sh
```

5. Create a new `.service` file (`connectivity_agent.service`) under `/etc/systemd/system/` to associate the script created with the Linux startup daemon process. You must have root access to create this file

```
[Unit]
Description=Connectivity Agent
After=network.target

[Service]
Type=simple
ExecStart=<AGENT_ROOT>/agentstartup.sh
User=<myUser>
Group=<myGroup>

[Install]
WantedBy=multi-user.target
```

6. Replace `<AGENT_ROOT>` with your path (for example, `/home/myuser/connectivity_agent`), `<myUser>` and `<myGroup>` with your user and user group.
7. Execute the below commands to enable/start the `connectivity_agent.service` process:

```
sudo systemctl daemon-reload
sudo systemctl enable connectivity_agent.service
sudo systemctl start connectivity_agent.service
```

8. To check the status of execution for the `connectivity_agent.service`, execute the below command. Make sure the status is **active (running)**, and the last msg log is "Agent started successfully... Now available for new messages..."

```
sudo systemctl status connectivity_agent.service
```

```

connectivity_agent.service - Connectivity Agent Startup
Loaded: loaded (/etc/systemd/system/connectivity_agent.service; enabled; vendor preset: disabled)
Active: active (running) since Fri 2024-02-02 10:27:18 UTC; 20s ago
Main PID: 23907 (agentstartup.sh)
Tasks: 45
Memory: 1.0G
CGroup: /system.slice/connectivity_agent.service
└─23907 /bin/bash /home/.../agent/agentstartup.sh
    └─23937 java -jar connectivityagent.jar

Feb 02 10:27:18 systemd[1]: Started Connectivity Agent Startup.
Feb 02 10:27:18 agentstartup.sh[23907]: java version "17.0.10" 2024-01-16 LTS
Feb 02 10:27:18 agentstartup.sh[23907]: Java(TM) SE Runtime Environment (build 17.0.10+11-LTS-240)
Feb 02 10:27:18 agentstartup.sh[23907]: Java HotSpot(TM) 64-Bit Server VM (build 17.0.10+11-LTS-240, mixed mode, sharing)
Feb 02 10:27:19 agentstartup.sh[23907]: Existing Agent installation found... Starting Agent for message processing.
Feb 02 10:27:19 agentstartup.sh[23907]: Checking for already running instances of this agent. This might take up to 15 seconds ...
Feb 02 10:27:21 agentstartup.sh[23907]: Initializing the credential store ...
Feb 02 10:27:27 agentstartup.sh[23907]: Agent started successfully...Now available for new messages...

```

Microsoft Windows Installation

This series of steps explains how to run the connectivity agent as a Microsoft Windows service using the Apache Commons Daemon. If you need more information on Apache Commons Daemon/ Procrun, visit the Apache Commons website at: <https://commons.apache.org/proper/commons-daemon/procrun.html>.

1. Download Procrun

- a. Go to the download page for Microsoft Windows at <https://downloads.apache.org/commons/daemon/binaries/windows/>.

Download the latest version of the zip file. For example: commons-daemon-1.3.4-bin-windows.zip.

- b. Unzip the zip content into a dedicated folder, such as "C:\Apache Commons Daemon."

2. Install the service.

- a. Open a command prompt in the **C:\Apache Commons Daemon** folder with Administrator privileges. You can do that by opening the "Command Prompt" and then typing the following:

```
cd "C:\Apache Commons Daemon"
```

- b. To make it easier later, create a local variable named 'AGENT_ROOT' with the folder path where you installed your OIC Agent. This is the folder containing the file "connectivityagent.jar." For example: C:\oic_agent. Note that this is set without quotation marks.

```
set AGENT_ROOT=C:\oic_agent
```

- c. Create the folder 'serviceLogFiles' under AGENT_ROOT.

```
mkdir "%AGENT_ROOT%\serviceLogs"
```

- d. Make sure that you have the Java executable in the correct place by querying its version.

```
"C:\Progra~1\Common Files\Oracle\Java\javapath\java.exe" --version
```

This should return something like the following:

```

C:\Apache Commons Daemon>"C:\Progra~1\Common
Files\Oracle\Java\javapath\java.exe" --version
java 17.0.9 2023-10-17 LTS
Java(TM) SE Runtime Environment (build 17.0.9+11-LTS-201)

```

Java HotSpot(TM) 64-Bit Server VM (build 17.0.9+11-LTS-201, mixed mode, sharing)

e. Run the command to install the service.

```
prunsvr.exe //IS//oic_agent --DisplayName "Oracle OIC Agent" --Startup
"auto" ^
--StartMode "exe" --StartImage "C:\Progra~1\Common
Files\Oracle\Java\javapath\java.exe" --StartPath "%AGENT_ROOT%" --
StartParams "-jar#%AGENT_ROOT%\connectivityagent.jar" ^
--StopMode "exe" --StopImage "cmd.exe" --StopParams "/c#FOR /F %A IN
('type "%AGENT_ROOT%\pid") DO (taskkill /F /PID %~A && del
"%AGENT_ROOT%\pid")" --StopTimeout 10 ^
--LogPath "%AGENT_ROOT%\serviceLogs" --LogPrefix "commons-daemon" --
LogLevel "Info" --StdError "auto" --StdOutput "auto"
```

This should return something like the following:

```
C:\Apache Commons Daemon>prunsvr.exe //IS//oic_agent --DisplayName
"Oracle OIC Agent" ^
More? --StartMode "exe" --StartImage "C:\Progra~1\Common
Files\Oracle\Java\javapath\java.exe" --StartPath "%AGENT_ROOT%" --
StartParams "-jar#%AGENT_ROOT%\connectivityagent.jar" ^
More? --StopMode "exe" --StopImage "cmd.exe" --StopParams "/c#FOR /F
%A IN ('type "%AGENT_ROOT%\pid") DO (taskkill /F /PID %~A && del
"%AGENT_ROOT%\pid")" --StopTimeout 10 ^
More? --LogPath "%AGENT_ROOT%\serviceLogs" --LogPrefix "commons-
daemon" --LogLevel "Info" --StdError "auto" --StdOutput "auto"
[2023-12-22 01:53:14] [info] [ 9080] Apache Commons Daemon procrun
(1.3.4.0 32-bit) started.
[2023-12-22 01:53:14] [info] [ 9080] Installing service 'oic_agent_qa'
name 'Oracle OIC Agent QA'.
[2023-12-22 01:53:14] [info] [ 9080] Service 'oic_agent_qa' installed.
[2023-12-22 01:53:14] [info] [ 9080] Apache Commons Daemon procrun
finished.
```

3. Start the service.

- a. Open the command prompt where the connectivity agent is being run and stop it by pressing **Ctrl+C**. If you cannot find that command prompt, run the command where <agentPid> is the agent process ID. You can find that in the %AGENT_ROOT%\pid file.

```
taskkill /F /PID <agentPid>
```

- b. Delete all the content under %AGENT_ROOT%\agenthome\logs. Since the service will run as LocalService and the log files were created by another user, you will see "access denied" errors and the agent log will not be properly produced.

The same will also happen with the PID file, so also remove this file to avoid issues.

```
del "%AGENT_ROOT%\agenthome\logs\*"
del "%AGENT_ROOT%\pid"
```

- c. Run the following command to run the service:

```
prunmgr //MR//oic_agent
```


- d. Open the latest file %AGENT_ROOT%\serviceLogs\oic_agent-stdout.YYYY-MM-dd.log and make sure you have the last log "Agent started successfully... Now available for new messages...". It should look like the following:


```
2023-12-22 02:17:23 Apache Commons Daemon procrun stdout initialized.  
Existing Agent installation found... Starting Agent for message  
processing.
```

```
Checking for already running instances of this agent. This might take  
up to 15 seconds ...
```

```
Initializing the credential store ...
```

```
Agent started successfully...Now available for new messages...
```

- e. You will also find it on the system tray with this  icon. There you can manage the service (that is, start, stop, and configure the service).
- f. In the service logs folder %AGENT_ROOT%\serviceLogs, you will find these files.

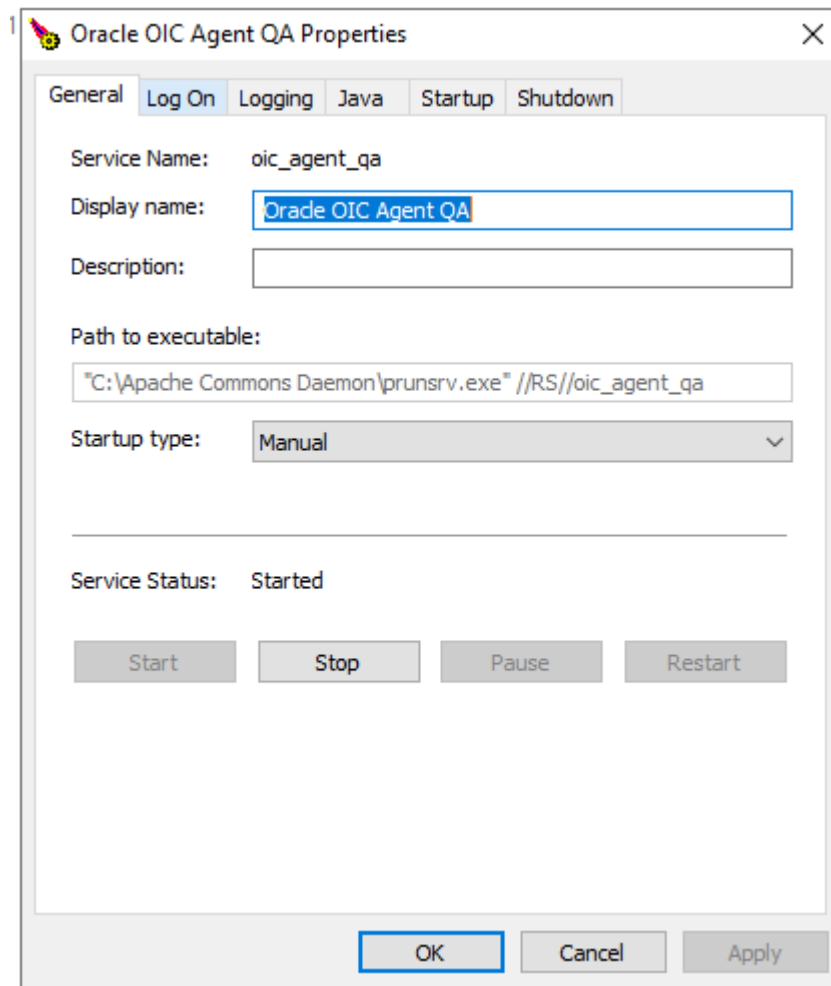

- commons-daemon.YYYY-MM-dd.log - The Procrun logs.
- oic_agent_qa-stderr.YYYY-MM-dd.log - The standard error of the java connectivity agent.
- oic_agent_qa-stdout.YYYY-MM-dd.log - The standard out of the java connectivity agent.

Troubleshooting Tips

This section provides some tips on how to troubleshoot the common problems you might find when using an agent such as a Microsoft Windows service.

Start by looking at the service logs to understand what is the main cause of the problem:

- Go to **%AGENT_ROOT%\serviceLogs** where you will see several files. Take the most recent ones:
 - oic_agent_dev-stdout.*.log - The standard out of the agent. You will find the generic progression of the status of the agent.
 - commons-daemon.2024-01-23.log - The logs of the agent service. You will find the start/stop commands.

- oic_agent_dev-stderr.2024-01-23.log - The standard error of the agent. You will find exceptions trace logs and specific information about any issue about the agent.
- Before solving this issue, you may want to stop the service and agent (see the next tip on how to do this). Some common issues can be wrong/experienced credentials or locked/access denied on log files (see below).

To force the service and agent to stop, you can do the following:


- Open the file %AGENT_ROOT%\pid and make note of the PID number.
- Run the command as "Run as administrator" on a command line console. This terminates the Java process running the agent.

```
taskkill /F /PID <agentPid>
```

- Run the Task Manager app as "Run as administrator":
 1. Open the **Services** tab.
 2. Select the service of your agent.
 3. Right click and select **Stop**.

One common issue is the locked/access denied on the log files of the agent. You will get this issue if you try to run the agent from the command line with a user different than the user used by the service.

1. Stop the service and agent as before.
2. Open Microsoft Windows File Explorer on the folder %AGENT_ROOT%\agenthome\logs.
3. Delete all files that end in .lck and that are not owned by LOCAL SERVICE. For example, see the files in the below image:

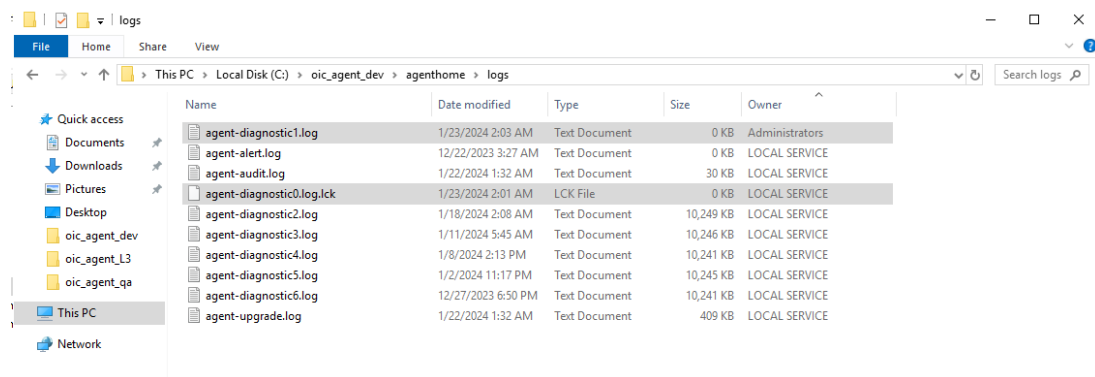

Start the service:

- Run the Task Manager app as "Run as administrator":
 1. Open the **Services** tab.
 2. Select the service of your agent.
 3. Right click and select **Start**.

Install/Update Certificates on the Agent

Installing dedicated certificates enables you to access hosts with self-signed certificates. You would normally need to import the certificate in the agent keystore in the following two scenarios:

- The connectivity agent is used with an SSL proxy.
- The connectivity agent is used to invoke secure (SSL) on-premises endpoints.



Note:

These tasks require you to briefly stop and restart the connectivity agent, so choose a time when the connectivity agent is not being used.

1. If you need to add a certificate on the agent keystore, use the `keytool` command to import the certificate into the `keystore.p12`. Make sure it is installed.
2. Stop the connectivity agent (if it is already running). The agent can be stopped in the two following ways:
 - If the agent is running as a normal process, press **Ctrl+C** on the command terminal window on which the agent is running, or search for the connectivity agent process and terminate it.
 - If the agent is running as an OS service, open the task manager and stop the `oic_agent` service.
3. Open a command line and navigate to the **%AGENT_ROOT%/agent/cert/** directory. (The `keystore.p12` file is available there.)
4. Run the following command:

```
keytool -importcert -keystore keystore.p12 -storepass  
<agent_keystore_password> -alias <alias_name> -noprompt -file  
<certificate_file_path>
```

Where:

- **storepass password:** The default, initial password for the agent keystore. Refer to your `keytool` documentation for the default storepass password. For more information, see the [keytool Command](#).
 - **alias alias_name:** Any name to uniquely identify the imported certificate in the keystore.
 - **file certificate_file:** Absolute path of the certificate file.
5. Restart the connectivity agent following Step 3 in [Restart](#).

Restart

You can restart the connectivity agent if required.

1. Stop the agent in either of the following ways:

- If the agent is running as a normal process, press **Ctrl+C** on the command terminal window on which the agent is running, or search for the connectivity agent process and terminate it.
 - If the agent is running as an OS service, open the task manager and stop the oic_agent service.
2. Wait at least 45 seconds before restarting the agent. This is because the agent monitoring framework waits for 45 seconds before marking the agent status as being down. If you start the agent before 45 seconds have completed, the agent restart fails with the following error message:

Agent is already running for this particular instance.

3. Restart the agent based on your environment and production load size.

Environment	Enter the Following Command
Production environments	<p>To troubleshoot issues, it is recommended that you restart the agent with the -XX:+HeapDumpOnOutOfMemoryError parameter:</p> <pre>java - XX:+HeapDumpOnOutOfMemoryError -jar connectivityagent.jar</pre> <p>If the connectivity agent runs out of memory, this parameter by default ensures that the heap dump is stored in a java_pidpid.hprof file in the directory where the agent application is run.</p> <p>Based on production loads, it may sometimes be necessary to allocate a larger amount of heap size for the agent process. If you determine that the process must be allocated a larger heap size, tune the -Xms and -Xmx parameters accordingly.</p> <ul style="list-style-type: none"> • Xms<Heap_minimum_size>G • Xmx<Heap_maximum_size>G <p>For example, assume you want to assign a minimum of 2 GB and a maximum of 8 GB to the agent JVM.</p> <pre>java -Xms2G -Xmx8G -jar connectivityagent.jar</pre> <p>The -XX, -Xms, and -Xmx parameters can all be specified at the same time if needed.</p>
Nonproduction environments	<pre>java -jar connectivityagent.jar</pre>

JDK Upgrade and Keystore Migration

To use the agent, you must have JDK version 17. If you are using an older version, follow the steps below to upgrade the JDK version and keystore. For the official JDK installation for Microsoft Windows with executable, see [JDK Installation Instructions for Microsoft Windows](#) in the JDK Installation Guide.

Download JDK17 for Microsoft Windows

1. Go to [JDK Development Kit 17.0.9 downloads](#).
2. Select **JDK17** and **Windows** tabs.
3. Click the **x64 Installer** link to download the `jdk-17_windows-x64_bin.exe`.


The screenshot shows the Oracle JDK 17 download page. The 'JDK 17' tab is selected under 'JDK Development Kit 17.0.9 downloads'. The 'Windows' tab is selected under the operating system options. A table lists the available download options for Windows:

Product/file description	File size	Download
x64 Compressed Archive	172.42 MB	https://download.oracle.com/java/17/latest/jdk-17_windows-x64_bin.zip (sha256)
x64 Installer	153.51 MB	https://download.oracle.com/java/17/latest/jdk-17_windows-x64_bin.exe (sha256)
x64 MSI Installer	152.30 MB	https://download.oracle.com/java/17/latest/jdk-17_windows-x64_bin.msi (sha256)


The 'x64 Installer' row is highlighted with a red box, and the 'Windows' tab is also highlighted with a red box.

Install Java for Microsoft Windows

1. Click the downloaded `jdk-17_windows-x64_bin.exe` to start the installation.
2. If prompted, click **Yes** to allow Java to make changes in your system.
3. Click **Next** to start the installation.

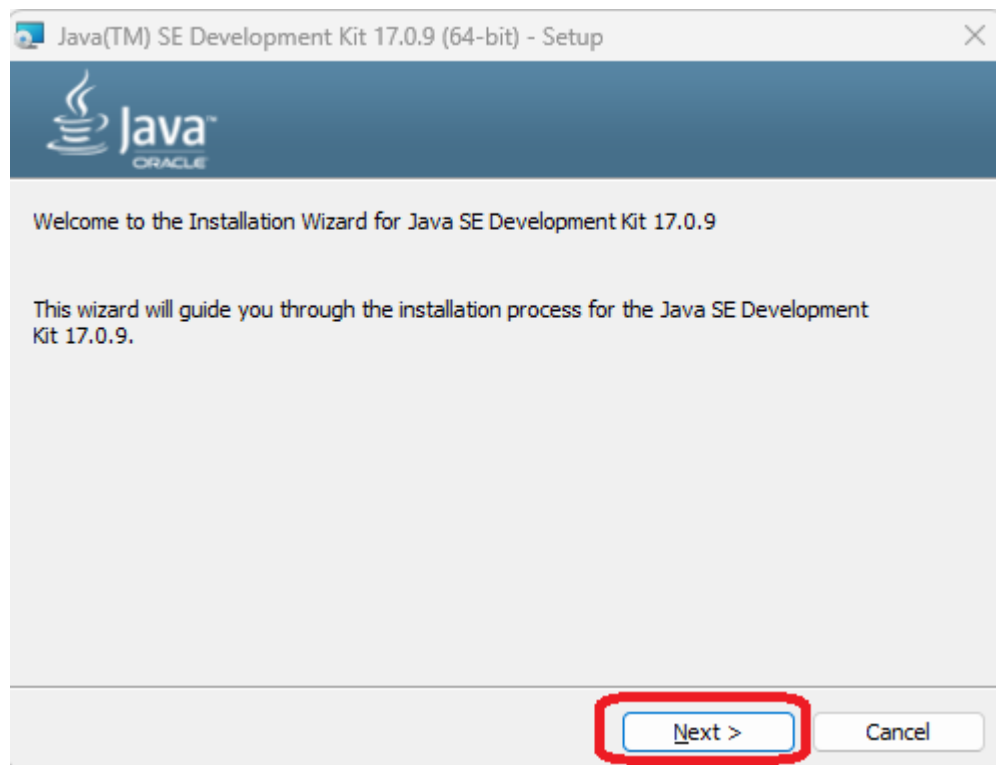

4. Accept the default install location and click **Next**.

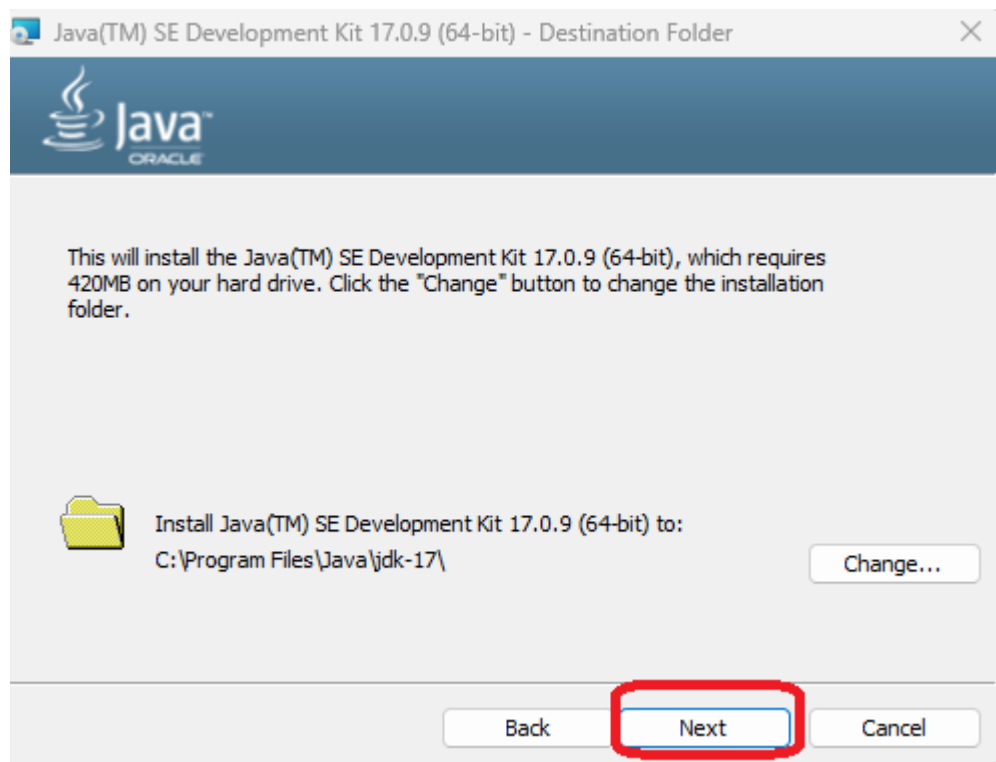

5. Verify the installation completed successfully and click **Close** to finish the installation process.



6. Open a command prompt and verify that you have JDK17 installed as the default version for Java.

```
Command Prompt
Microsoft Windows [Version 10.0.22621.2715]
(c) Microsoft Corporation. All rights reserved.

C:\Users\serdemir>java -version
java version "17.0.9" 2023-10-17 LTS
Java(TM) SE Runtime Environment (build 17.0.9+11-LTS-201)
Java HotSpot(TM) 64-Bit Server VM (build 17.0.9+11-LTS-201, mixed mode, sharing)

C:\Users\serdemir>
```

Download JDK17 for Linux

There are three ways to install JDK on Linux. This guide describes the installation on RPM Based Linux. For more information, see [Installation of the JDK on Linux Platforms](#) in the JDK Installation Guide.

1. Go to [JDK Development Kit 17.0.10 downloads](#).
2. Select **JDK17** and then select the **Linux** tab.
3. Click the **x64 RPM Package** link to download **jdk-17_linux-x64_bin.rpm**.

Java 21 and Java 17 available now

JDK 21 is the latest long-term support release of Java SE Platform.

JDK 21 **JDK 17** GraalVM for JDK 21 GraalVM for JDK 17

JDK Development Kit 17.0.10 downloads

JDK 17 binaries are free to use in production and free to redistribute, at no cost, under the [Oracle No-Fee Terms and Conditions \(NFTC\)](#).

JDK 17 will receive updates under the NFTC, until September 2024. Subsequent JDK 17 updates will be licensed under the [Java SE OTN License \(OTN\)](#) and production use beyond the [limited free grants](#) of the OTN license will [require a fee](#).

Linux macOS Windows

Product/file description	File size	Download
ARM64 Compressed Archive	172.65 MB	https://download.oracle.com/java/17/latest/jdk-17_linux-aarch64_bin.tar.gz (sha256)
ARM64 RPM Package	172.40 MB	https://download.oracle.com/java/17/latest/jdk-17_linux-aarch64_bin.rpm (sha256) (OL 8 GPG Key)
x64 Compressed Archive	174.03 MB	https://download.oracle.com/java/17/latest/jdk-17_linux-x64_bin.tar.gz (sha256)
x64 Debian Package	149.43 MB	https://download.oracle.com/java/17/latest/jdk-17_linux-x64_bin.deb (sha256)
x64 RPM Package	173.77 MB	https://download.oracle.com/java/17/latest/jdk-17_linux-x64_bin.rpm (sha256) (OL 8 GPG Key)

Install Java for Linux

Ensure you have the root user access. You can do this by running the command “su” and entering the **superuser password**.

1. Switch to the root user.
2. From a command prompt, navigate to the directory from which you downloaded the RPM file.
3. Install the required package using the following command:

```
rpm -ivh jdk-17_linux-x64_bin.rpm
```

```
[root@wfv03546 java]# rpm -ivh jdk-17_linux-x64_bin.rpm
warning: jdk-17_linux-x64_bin.rpm: Header V3 RSA/SHA256 Signature, key ID ad986da3: NOKEY
Preparing... ##### [100%]
Updating / installing...
 1:jdk-17-2000:17.0.10-11 ##### [100%]
[root@wfv03546 java]#
```

4. Verify you have JDK17 as the default version for Java.

```
[root@wfv03546 java]# java -version
java version "17.0.10" 2024-01-16 LTS
Java(TM) SE Runtime Environment (build 17.0.10+11-LTS-240)
Java HotSpot(TM) 64-Bit Server VM (build 17.0.10+11-LTS-240, mixed mode, sharing)
[root@wfv03546 java]#
```


5. Delete the .rpm file if you need to save disk space.

Convert the JKS KeyStore and Restart the Agent


1. Go to your agent installation directory and navigate to **Agent_Install_Location>/agenthome/agent/cert**.

 **Note:**

If you already have the PKCS12 KeyStore (as shown in the image below), you do not need to complete these steps. You can restart the agent with steps 4 and 6 .

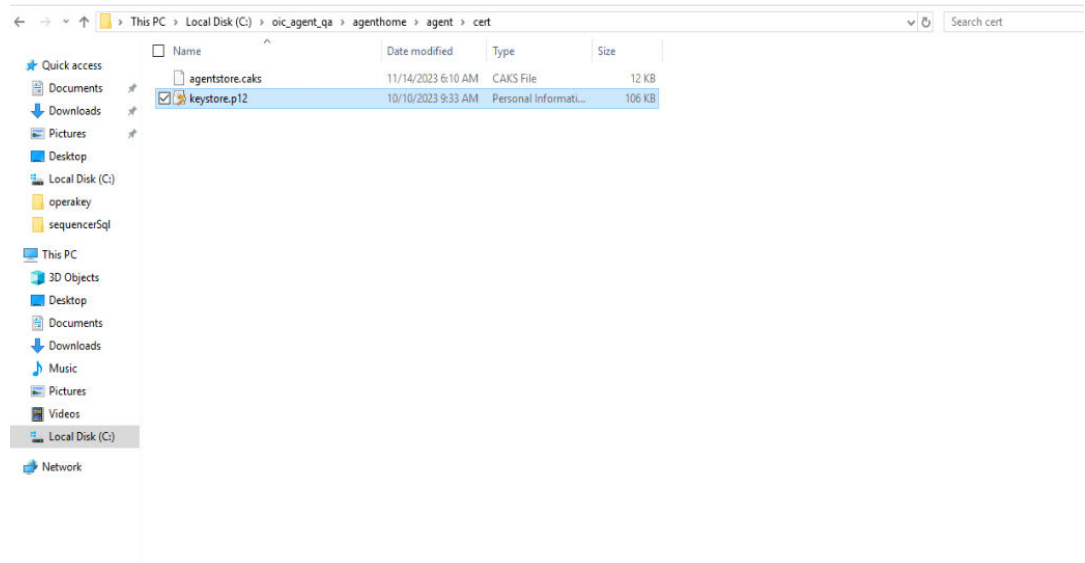

If you still have the JKS KeyStore on the "keystore.jks" file (as shown in the image below), complete the following steps. These tasks require you to briefly stop and then restart the connectivity agent, so choose a time when the connectivity agent is not being used.

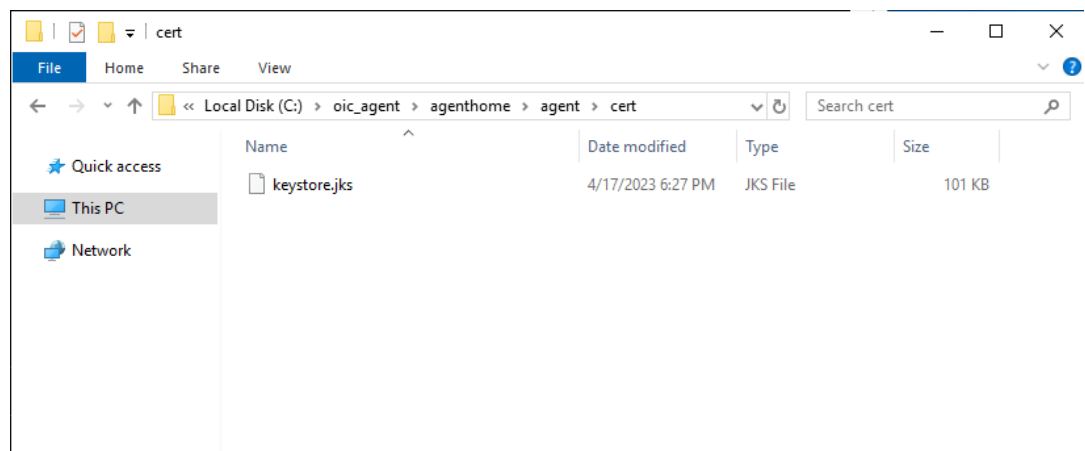


2. On the server that hosts the connectivity agent, create a backup of the keystore.jks file for safety by copy-pasting and naming it "keystore_backup.jks." Move this backup file to a safe folder.

3. Convert the JKS KeyStore to the PKCS12 KeyStore by running the following commands from the command line where <Agent_Install_Location> is your agent root folder location.

```
cd <Agent_Install_Location> /agenthome/agent/cert
```

```
keytool -importkeystore -srckeystore keystore.jks -destkeystore  
keystore.p12 -srcstoretype JKS -deststoretype PKCS12 -deststorepass  
changeit -srcstorepass changeit
```

The below image shows an example of these commands:

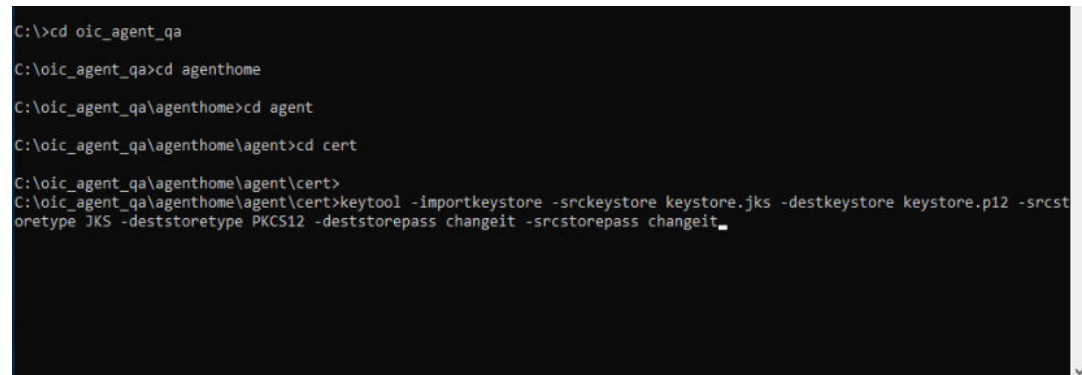


```
C:\>cd oic_agent_qa  
C:\oic_agent_qa>cd agenthome  
C:\oic_agent_qa\agenthome>cd agent  
C:\oic_agent_qa\agenthome\agent>cd cert  
C:\oic_agent_qa\agenthome\agent\cert>  
C:\oic_agent_qa\agenthome\agent\cert>keytool -importkeystore -srckeystore keystore.jks -destkeystore keystore.p12 -srcstoretype JKS -deststoretype PKCS12 -deststorepass changeit -srcstorepass changeit_
```

4. Stop the agent by sending a **CTRL+C** signal or closing the command prompt window that runs the agent.
5. Delete the keystore.jks file if you just converted to the PKCS12 KeyStore.
6. Start the agent by doing the following:
 - a. Go to the installation directory.
 - b. Run the following command on a command line prompt:

```
java -jar connectivityagent.jar
```

- c. Verify the agent is running successfully.



```
Checking for already running instances of this agent. This might take up to 15 seconds ...  
Initializing the credential store ...  
Agent started successfully...Now available for new messages...
```

7. If everything is working correctly, delete the backup **keystore_backup.jks**. If not, you can roll back using the JKS keystore backup.

6

Gaming Integration Configurations

Complete these configurations to enable gaming operations between OPERA Cloud and your PTS.

OPERA Cloud Controls

For gaming system operations to work with the external PTS system, the following OPERA Cloud modules must be active:

OPERA Membership

- Function Enrollment with system **GAMING** added to it (other systems can also exist).
- Setting **Default Membership Type** to the membership type you created as described in [Membership Management](#).

OPERA Comp Accounting

- Function **Comp Request** must be active.
- Function **Comp Types** must be active.
- Parameter **Comp Accounting Integration Service** must be active.
- Parameter **Comp Redemption** must be active (only if using Aristocrat Oasis).
- Parameter **Generic Comp Membership Number** must be active.
- Parameter **PTS Membership Type based Comp Routing** must be active.
- Parameter **Player Statistics** must be active.
- Setting **Default PTS Membership Type** to the membership type you created as described in [Membership Management](#).

OPERA Profile

- Functions **Profile Lookup** → **Default External System for Lookup** set to **External System** with the same name as the Outbound Configuration you created as described in the OPERA Cloud Outbound Configuration topics. For more information, see [Outbound Configuration for Aristocrat Oasis](#) and [Outbound Configuration for IGT](#). This External System must be flagged for Loyalty.
- Functions **Profile Lookup** → **External Lookup Behavior** set to **FORCE**.
- Functions **Profile Lookup** → **Profile Types for Lookup** set to **Company, Individual, Group, Source, and Travel Agent**.

For details on how to access and configure OPERA Controls, refer to [OPERA Controls](#) in the OPERA Cloud Services documentation.

Membership Management

For details on completing the following configurations, refer to [Guest Loyalty Programs](#) in the OPERA Cloud Services documentation.

Membership Class

To properly use these gaming operations, you must have a membership class flagged as "Loyalty Program." For details on creating membership classes, refer to [Configuring Membership Classes](#) in the OPERA Cloud Services documentation.



Note:

Only one membership class can be flagged as "Loyalty Program."

Figure 6-1 Membership Class Screen

Membership Class

* Required Field

Code
PTS

Description
PTS Gaming Class

Sequence
- 1 +

☒ Loyalty Program ?

☐ Frequent Flyer ?

Membership Type

To execute gaming operations with the IGT system, you must create a PTS membership type with the name "PTS."



Note:

The name of this Membership Type must be entered exactly as "PTS."

For details on how to create a membership type, refer to [Configuring Membership Types](#) in the OPERA Cloud Services documentation.

For the membership type details:

1. Mark the membership as **Primary**.
2. Mark the membership as **Centrally Managed**. Only one membership type can be centrally managed.
3. Select the membership class you previously created.

Figure 6-2 Membership Type Details Screen

Membership Type Details

Type
PTS

Description
Patron Membership Type

Points Label
—

Class
PTS

Seq
1

☒ Centrally Managed

☒ Primary

☐ Inactive

Edit

For the Membership Handling:

1. Set the External Database to the one with the same name as the outbound configuration that you previously created.
2. Set Membership Action to **Auto Attach** and select **New Reservation**.

Figure 6-3 Membership Handling Screen

Membership Handling

Default Member Status:
—

Membership Action
Auto Attach

☒ New Reservation

☐ Update Reservation

☒ Check In

☐ Check Out

☐ Exclude Profile From Purge

☐ Fulfillment

☐ Enrollment Code Required

☒ Externally Controlled

External Database
IGTADI_CUSTOM

☒ Name Protected

☐ Alternate Name Protected

☒ Auto Populate Number From Name

Expiry Period
1 Year December

Edit

For Card Number Details:

1. Deselect **Expiration Date Required**.

Figure 6-4 Card Number Details Screen

Card Number Details

Select either Card Number Validation or Card Number Auto Generation. Validation is recommended if card numbers are entered manually and/or downloaded from an external system. Auto Generation is recommended if members are enrolled and managed in OPERA Cloud.

☒ Card Number Validation ☐ Card Number Auto Generation

☒ Allow duplicate card numbers

☐ Expiration Date Required

☐ Level Required


☐ Name on Card From Alt Name

Edit

Membership Levels

Once the membership type is configured, add your Membership Levels to this Membership Type. The values on the below image is just for illustration purposes. Your Hotel/Casino will have its own Membership Levels already defined by the business.

Figure 6-5 Membership Levels Screen

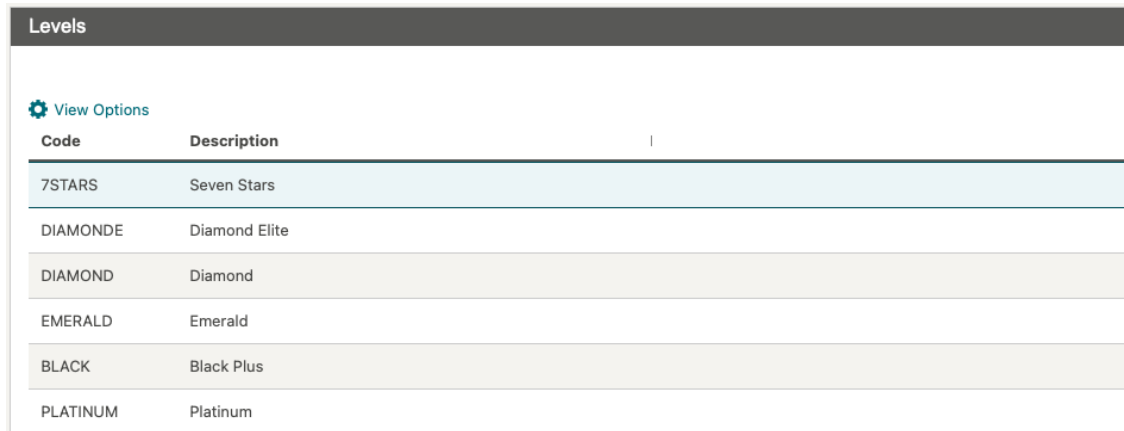

Code	Description
7STARS	Seven Stars
DIAMONDE	Diamond Elite
DIAMOND	Diamond
EMERALD	Emerald
BLACK	Black Plus
PLATINUM	Platinum

Rate Management

Promotion Codes

To fetch offers from a PTS system while creating reservations, you must create promotion codes in OPERA Cloud. These promotions must have the same information (code, start and end dates) as the existing offers in the corresponding gaming system.

These promotions will later be redeemed in your PTS system at guest check-out via the Comp Posting operation. The promotion will automatically route from the guest's folio to a comp window when the reservation is created.

For details on creating promotion codes in OPERA Cloud, refer to [Configuring Promotion Codes](#) in the OPERA Cloud Services documentation.

Gaming Vendor Specific Configurations

Aristocrat Oasis

The following operations are supported as part of this gaming integration product. Only the operations listed below are currently supported.

Table 6-1 APIs

Function	How it works	Direction
Player Enrollment	<ul style="list-style-type: none"> OPERA Cloud sends the name and address information for a new player profile or an existing OPERA Cloud profile to OASIS 360. OASIS 360 creates a player profile and responds to OPERA Cloud with the player ID. 	OPERA Cloud → OASIS 360
Profile Lookup	<ul style="list-style-type: none"> OPERA Cloud users can search OASIS 360 for profile(s) based on Player ID or Last and/or First Name. OASIS 360 returns a list of profiles matching the criteria requested, which the OPERA Cloud user views on-screen. 	OPERA Cloud → OASIS 360
Profile Fetch	<ul style="list-style-type: none"> The OPERA Cloud user selects a profile from a list provided during the Lookup operation. OASIS 360 returns the patron's name, addresses, birth date, and email address; OPERA Cloud will either insert a new profile record or merge the data into an existing record. 	OPERA Cloud → OASIS 360
Profile Update	OPERA Cloud notifies OASIS 360 of any changes made to the name and/or address, telephone, and email on any OPERA Cloud profile that has an associated OASIS 360 player id.	OPERA Cloud → OASIS 360
Comp Postings	<ul style="list-style-type: none"> OPERA Cloud sends a comp request to OASIS 360 when a charge is posted to a comp window (101-108). A comp posting is any charge that was moved to a comp window, regardless of whether it was originally posted manually, through the End of Day sequence, or by POS interface to OPERA Cloud. To void a comp transaction, you must move back to a cash window (1-8). A Void is then sent to OASIS 360. OASIS 360 will either approve or decline the comp posting. Approval status appears on the OPERA Cloud Comp Journal screen. OPERA Cloud sends comp postings to OASIS 360 in monetary value / amount only. OPERA Cloud sends comps monetary value / amount to only one default bucket in OASIS 360. 	OPERA Cloud → OASIS 360

 **Note:**

Do not move transactions between comp windows (101-108).

Table 6-1 (Cont.) APIs

Function	How it works	Direction
Comp Redemption (payment for window 1-8)	<ul style="list-style-type: none"> Ability in OPERA to obtain a players earned bucket values from the gaming system in order to use as a credit/payment towards their hotel folio balance (cash windows 1-8) OPERA Cloud sends comp redemption to OASIS 360 in monetary value / amount only. 	OPERA Cloud → OASIS 360
Player Snapshot/ PTS Inquiry (view only)	<ul style="list-style-type: none"> OPERA Cloud users can view basic, real-time balances and account information by sending a Player Statistics request from OPERA Cloud to OASIS 360. This information is never stored in OPERA Cloud. OASIS 360 responds with details that appear on Players Statistics screen in OPERA Cloud. For example, comp dollar or points balance. The scope of data sent is not configurable in OPERA Cloud. 	OPERA Cloud → OASIS 360
Player Promotions/ Offers (view only)	<ul style="list-style-type: none"> Promotion/Offer codes must be created for both OPERA Cloud and OASIS 360. OPERA Cloud users can click Fetch Offer from the Look to Book screen to view promotions/offers available for the player. 	OPERA Cloud → OASIS 360

Required Information

To invoke the nConnect APIs from OPERA Cloud, you must provide the following nConnect OAuth credentials:

- URL for Identity Server
- Client ID
- Client Secret
- URL for nConnect Server
- Username and Password
- Scope

The integration between OPERA Cloud and nConnect uses the following APIs with their required permissions. nConnect requires these permissions to successfully execute the operations (see list of operations above).

Table 6-2 APIs

API	Method	Permission
/api/v1/PlayerInfo/	POST	AddPlayerPermission
/api/v1/PlayerInfo/	GET	GetPlayerPermission
/api/v1/PlayerInfo/{PlayerID}/Statistics	GET	GetPlayerStatisticsPermission
/api/v1/PlayerInfo/{playerId}/MarketingCouponsWithPlayerID	GET	GetPlayerMarketingCouponsPermission

Table 6-2 (Cont.) APIs

API	Method	Permission
/api/v1/PlayerInfo/{playerId}/Accounts/AccountType/{accountType}	GET	GetPlayerAccountBalanceByAccountTypeIdPermission
/api/v1/PlayerInfo/{playerId}/Transactions	POST	AddPlayerTransactionPermission
/api/v1/PlayerInfo/{playerId}/Accounts	GET	GetPlayerAccountBalancePermission
/api/v1/PlayerInfo/{playerId}	PUT	UpdatePlayerProfilePermission
/api/v1/PlayerInfo/{playerId}	GET	GetPlayerPermission
/api/v1/PlayerInfo/{playerId}/Address	POST	AddPlayerAddressPermission
/api/v1/PlayerInfo/{playerId}/Address/{addressId}	PUT	UpdatePlayerAddressPermission
/api/v1/PlayerInfo/{playerId}/Email	POST	AddPlayerEmailPermission
/api/v1/PlayerInfo/{playerId}/Email/{emailId}	PUT	UpdatePlayerEmailPermission
/api/v1/PlayerInfo/{playerId}/PersonalID	POST	AddPlayerPersonalIDPermission
/api/v1/PlayerInfo/{playerId}/PersonalID/{ID}	PUT	UpdatePlayerPersonalIDPermission

For further details on nConnect (or Aristocrat Oasis) configurations, email your Aristocrat point of contact or your Oracle Hospitality point of contact.

Comp Accounting

Comp Redemption Codes

Comp Redemption Codes are required to execute the cashier operations in Comp Redemption. These codes correspond to the account types in Aristocrat Oasis.

Create the following codes in OPERA Cloud to redeem transactions in all available account types in Oasis. In OPERA Cloud, each Comp Redemption Code has an associated transition code.

Table 6-3 Comp Redemption Codes

Oasis Account Type	Code	Description	Transaction Code
2	2	Comps	55903
3	3	Cash	55904
4	4	Promo	99500
5	5	Discretionary	99502

You can configure any transaction codes in OPERA Cloud and associate them to these Comp Redemption Codes if the following conditions are met:

- Transaction Code group is 'PAYMENT'

- Transaction Code payment type is 'Others'
- Transaction Code is marked for 'Cashier Payments'

Figure 6-6 Manage Transaction Code Screen


The screenshot displays the 'Manage Transaction Code' interface. It features a top navigation bar with 'Property' and 'Template' tabs. The main content area is divided into several sections: 'Ownership' (Property), 'Description' (Discretionary Redemption), 'Transaction Type', 'Service Recovery Code', 'Minimum Amount' (USD), 'Accounting Code', 'Payment Details' (Payment Type: Others), 'Processing Type', 'CC Code', 'CC Commission Pct', and 'Options'. The 'Options' section includes checkboxes for 'Revenue Group', 'Payout', 'Membership', 'Check Number Mandatory', 'Deposit Payments', 'Comp Payments', 'Include in Deposit/CXL Rule', 'Cashier Payments' (checked), 'Generates Inclusive', 'Manual Posting', and 'Print Receipt'. The 'Cashier Payments' checkbox is highlighted with a red box.

OPERA Cloud Outbound Configuration for Aristocrat Oasis


A new outbound system configuration is required for OPERA Cloud to connect to nConnect.

Follow the below steps to set up the Outbound Configuration in OPERA Cloud. For additional details on creating an outbound configuration, refer to [Configuring Outbound Systems](#) in the OPERA Cloud Services documentation.


1. Log in to OPERA Cloud and click the **vertical ellipsis** and select **Toolbox**.

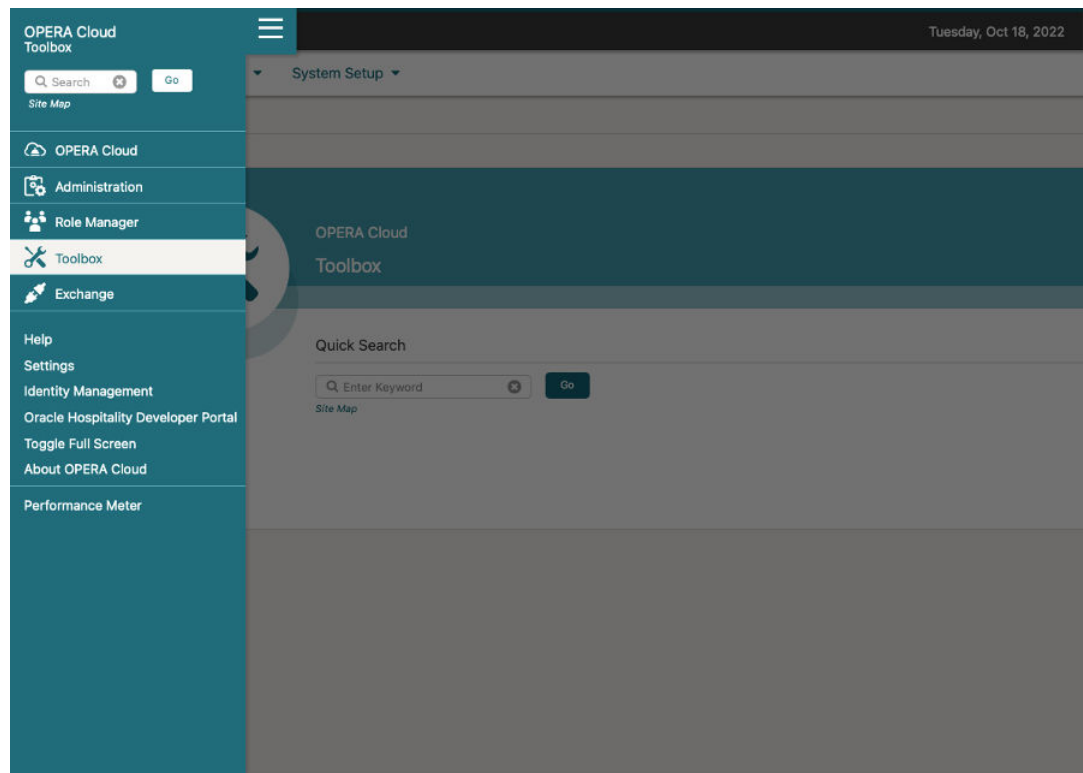

2. Select **System Setup**, select **Outbound**, and then select **Outbound Configuration**.

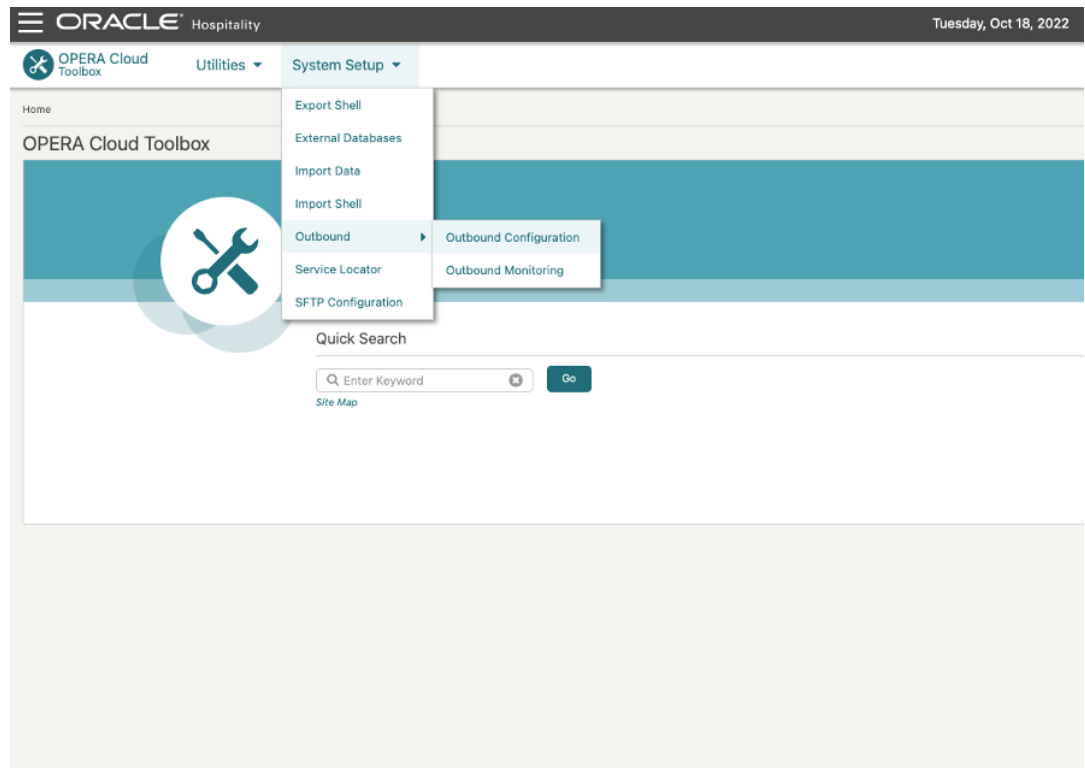

3. Select the **Property** and then click **New** to set up the new Outbound Configuration.

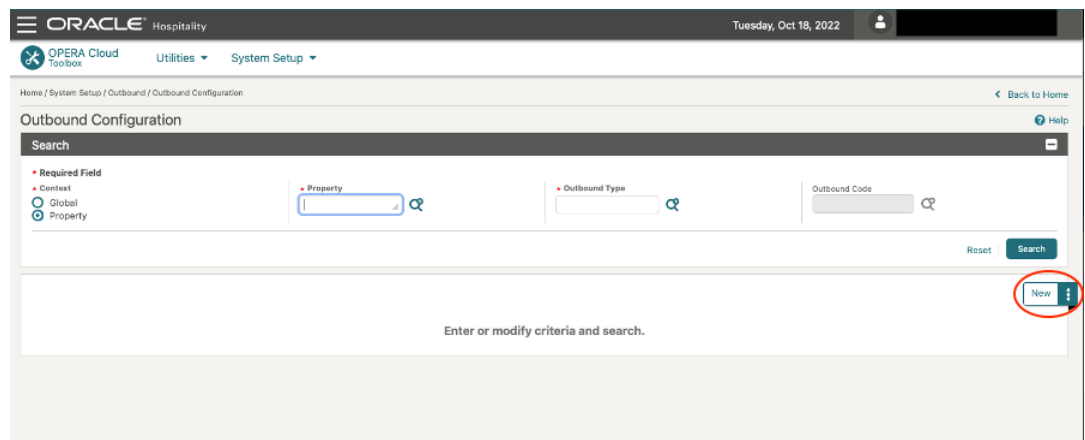

The screenshot displays the 'Outbound System Configuration' page in the Oracle Hospitality OPERA Cloud interface. The page is divided into several sections for configuration:

- Context:** Radio buttons for 'Global' and 'Property' (selected).
- Property:** A dropdown menu for selecting a property.
- Outbound Type:** A dropdown menu for selecting the outbound type.
- Outbound Code:** A text field for the unique identifier.
- Outbound Description:** A text area for an optional description.
- Authorization Type:** A dropdown menu with 'OAUTH' selected.
- Service Account:** Fields for 'your username' and 'your password'.
- OAuth Token URL:** A text field for the identity provider URL.
- Grant Type:** A dropdown menu with 'Password' selected.
- Client ID:** A text field for the client identifier.
- Client Key:** A text field for the client key.
- Scope:** A text field for the scope.
- Application Key:** A text field for the external system identifier.
- Protocol:** Checkboxes for 'Enable External System' and 'Enable Conversions'.
- Bypass Proxy:** A checkbox.

At the bottom right, there are 'Cancel' and 'Save' buttons.

4. Complete the following fields and click **Save**. For the specific details on each field and how to create an Outbound Configuration, see [Managing Outbound System Configuration](#) in the OPERA Cloud Services documentation.
 - a. **Context:** Select the **Property** option.
 - b. **Property:** Select the property for which this configuration is being set up.
 - c. **Outbound Type:** Select **GAMING_CUSTOM** from the list of options.
 - d. **Outbound Code:** Provide the unique identifier (for example: ATI_{Property_Name}).
 - e. **Outbound Description:** Provide the description (optional).
 - f. **Authorization Type:** Select **OAUTH** from the list of options. When you select OAUTH, all related Authorization fields appear.
 - g. **Service Account:** Enter your **Client ID**.
 - h. **Service Account Key:** Enter your **Client Secret**.
 - i. **OAuth Token URL:** Type the URL of the identity provider from where the token will be fetched.
 - j. **Grant Type:** Select **Password** from the drop down list.
 - k. **Client Id:** Enter your **Username**.
 - l. **Client Key:** Enter your **Password**.
 - m. **Scope:** Enter your **Scope**.
 - n. **Enable External System:** Select this option.
 - o. **Enable Conversions:** Select this option.
 - p. **External Property:** Enter the **Site ID** or **Hotel Code** provided by ATI.
 - q. **Bypass Proxy:** Select this option.
 - r. **RESTAPIBaseURL:** Enter the base URL of the nConnect server where the APIs are running. This URL can be something like the following: https://<hostname or ip address>:<port>

Once the configuration is saved, the final configuration should look like the page below:

Outbound System Configuration

Context
Property
Outbound Type
GAMING_CUSTOM

Outbound Code
Outbound Description

Protocol
REST
Enable External System
Enable Conversions
External Property
ADI

Authorization Type
OAUTH
Service Account
Service Account Key

OAuth Token Url
Grant Type
Password
Client Id
Client Key
Scope
urn:nC_realm

Application Key
Bypass Proxy

Service Details
Service Name
Service Path
RESTAPIBaseURL

Once the above fields are completed, save the outbound configuration and proceed to [Data Value Mappings](#) (DVM). No Custom Headers are required.

DVMs for Aristocrat Oasis

The following Data Value Mappings (DVMs) must be set up for the Aristocrat Oasis system. For details on how to create DVMs within OPERA Cloud, see [Data Value Mappings](#) in the OPERA Cloud Services documentation.

The below DVM values are for reference only and can vary by property.

Country Codes

This DVM will convert the Country Code used in OPERA Cloud with the Country Code used in Aristocrat Oasis for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:



Note:

This list follows the ISO 3166.

- **OPERA Cloud Code:** This is the Country Code used in OPERA Cloud.
- **External Value:** This is the Country Code in Aristocrat Oasis that corresponds to the OPERA Cloud Country Code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-4 Country Codes


OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Afghanistan	AF		
Albania	AL		
Algeria	DZ		
American Samoa	AS		
Andorra	AD		
Angola	AO		
Anguilla	AI		

Table 6-4 (Cont.) Country Codes













OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Antarctica	AQ		
Antigua and Barbuda	AG		
Argentina	AR		
Armenia	AM		
Aruba	AW		
Australia	AU		
Austria	AT		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Azerbaijan	AZ		
Bahamas (the)	BS		
Bahrain	BH		
Bangladesh	BD		
Barbados	BB		
Belarus	BY		
Belgium	BE		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Belize	BZ		
Benin	BJ		
Bermuda	BM		
Bhutan	BT		
Bolivia (Plurinational State of)	BO		
Bonaire, Sint Eustatius and Saba	BQ		
Bosnia and Herzegovina	BA		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Botswana	BW		
Bouvet Island	BV		
Brazil	BR		
British Indian Ocean Territory (the)	IO		
Brunei Darussalam	BN		
Bulgaria	BG		
Burkina Faso	BF		

Table 6-4 (Cont.) Country Codes



OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Burundi	BI		
Cabo Verde	CV		
Cambodia	KH		
Cameroon	CM		
Canada	CA		
Cayman Islands (the)	KY		
Central African Republic (the)	CF		

Table 6-4 (Cont.) Country Codes



OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Chad	TD		
Chile	CL		
China	CN		
Christmas Island	CX		
Cocos (Keeling) Islands (the)	CC		
Colombia	CO		
Comoros (the)	KM		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Congo (the Democratic Republic of the)	CD		
Congo (the)	CG		
Cook Islands (the)	CK		
Costa Rica	CR		
Croatia	HR		
Cuba	CU		
Curaao	CW		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Cyprus	CY		
Czechia	CZ		
Cte d'Ivoire	CI		
Denmark	DK		
Djibouti	DJ		
Dominica	DM		
Dominican Republic (the)	DO		

Table 6-4 (Cont.) Country Codes












OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Ecuador	EC		
Egypt	EG		
El Salvador	SV		
Equatorial Guinea	GQ		
Eritrea	ER		
Estonia	EE		
Eswatini	SZ		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Ethiopia	ET		
Falkland Islands (the) [Malvinas]	FK		
Faroe Islands (the)	FO		
Fiji	FJ		
Finland	FI		
France	FR		
French Guiana	GF		

Table 6-4 (Cont.) Country Codes















OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
French Polynesia	PF		
French Southern Territories (the)	TF		
Gabon	GA		
Gambia (the)	GM		
Georgia	GE		
Germany	DE		
Ghana	GH		

Table 6-4 (Cont.) Country Codes









OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Gibraltar	GI		
Greece	GR		
Greenland	GL		
Grenada	GD		
Guadeloupe	GP		
Guam	GU		
Guatemala	GT		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Guernsey	GG		
Guinea	GN		
Guinea-Bissau	GW		
Guyana	GY		
Haiti	HT		
Heard Island and McDonald Islands	HM		
Holy See (the)	VA		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Honduras	HN		
Hong Kong	HK		
Hungary	HU		
Iceland	IS		
India	IN		
Indonesia	ID		
Iran (Islamic Republic of)	IR		

Table 6-4 (Cont.) Country Codes





OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Iraq	IQ		
Ireland	IE		
Isle of Man	IM		
Israel	IL		
Italy	IT		
Jamaica	JM		
Japan	JP		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Jersey	JE		
Jordan	JO		
Kazakhstan	KZ		
Kenya	KE		
Kiribati	KI		
Korea (the Democratic People's Republic of)	KP		
Korea (the Republic of)	KR		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Kuwait	KW		
Kyrgyzstan	KG		
Lao People's Democratic Republic (the)	LA		
Latvia	LV		
Lebanon	LB		
Lesotho	LS		
Liberia	LR		

Table 6-4 (Cont.) Country Codes



OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Libya	LY		
Liechtenstein	LI		
Lithuania	LT		
Luxembourg	LU		
Macao	MO		
Madagascar	MG		
Malawi	MW		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Malaysia	MY		
Maldives	MV		
Mali	ML		
Malta	MT		
Marshall Islands (the)	MH		
Martinique	MQ		
Mauritania	MR		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Mauritius	MU		
Mayotte	YT		
Mexico	MX		
Micronesia (Federated States of)	FM		
Moldova (the Republic of)	MD		
Monaco	MC		
Mongolia	MN		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Montenegro	ME		
Montserrat	MS		
Morocco	MA		
Mozambique	MZ		
Myanmar	MM		
Namibia	NA		
Nauru	NR		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Nepal	NP		
Netherlands (the)	NL		
New Caledonia	NC		
New Zealand	NZ		
Nicaragua	NI		
Niger (the)	NE		
Nigeria	NG		

Table 6-4 (Cont.) Country Codes






OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Niue	NU		
Norfolk Island	NF		
North Macedonia	MK		
Northern Mariana Islands (the)	MP		
Norway	NO		
Oman	OM		
Pakistan	PK		

Table 6-4 (Cont.) Country Codes



OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Palau	PW		
Palestine, State of	PS		
Panama	PA		
Papua New Guinea	PG		
Paraguay	PY		
Peru	PE		
Philippines (the)	PH		

Table 6-4 (Cont.) Country Codes








OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Pitcairn	PN		
Poland	PL		
Portugal	PT		
Puerto Rico	PR		
Qatar	QA		
Romania	RO		
Russian Federation (the)	RU		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Rwanda	RW		
Runion	RE		
Saint Barthlemy	BL		
Saint Helena, Ascension and Tristan da Cunha	SH		
Saint Kitts and Nevis	KN		
Saint Lucia	LC		
Saint Martin (French part)	MF		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Saint Pierre and Miquelon	PM		
Saint Vincent and the Grenadines	VC		
Samoa	WS		
San Marino	SM		
Sao Tome and Principe	ST		
Saudi Arabia	SA		
Senegal	SN		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Serbia	RS		
Seychelles	SC		
Sierra Leone	SL		
Singapore	SG		
Sint Maarten (Dutch part)	SX		
Slovakia	SK		
Slovenia	SI		

Table 6-4 (Cont.) Country Codes




OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Solomon Islands	SB		
Somalia	SO		
South Africa	ZA		
South Georgia and the South Sandwich Islands	GS		
South Sudan	SS		
Spain	ES		
Sri Lanka	LK		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Sudan (the)	SD		
Suriname	SR		
Svalbard and Jan Mayen	SJ		
Sweden	SE		
Switzerland	CH		
Syrian Arab Republic (the)	SY		
Taiwan (Province of China)	TW		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Tajikistan	TJ		
Tanzania, the United Republic of	TZ		
Thailand	TH		
Timor-Leste	TL		
Togo	TG		
Tokelau	TK		
Tonga	TO		

Table 6-4 (Cont.) Country Codes















OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Trinidad and Tobago	TT		
Tunisia	TN		
Turkey	TM		
Turkmenistan	TC		
Turks and Caicos Islands (the)	TV		
Tuvalu	TR		
Uganda	UG		









Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Ukraine	UA		
United Arab Emirates (the)	AE		
United Kingdom of Great Britain and Northern Ireland (the)	GB		
United States Minor Outlying Islands (the)	UM		
United States of America (the)	US		
Uruguay	UY		
Uzbekistan	UZ		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Vanuatu	VU		
Venezuela (Bolivarian Republic of)	VE		
Viet Nam	VN		
Virgin Islands (British)	VG		
Virgin Islands (U.S.)	VI		
Wallis and Futuna	WF		
Western Sahara*	EH		

Table 6-4 (Cont.) Country Codes

OPERA Cloud Value	External Value	External > OPERA Cloud	OPERA Cloud > External
Yemen	YE		
Zambia	ZM		
Zimbabwe	ZW		
land Islands	AX		







Membership Level

This DVM will convert the Membership Levels codes previously created into the Aristocrat Oasis Player Ranking Levels (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Membership Level code that you previously created.
- **External Value:** This is the Player Ranking in Aristocrat Oasis that corresponds to the OPERA Cloud Membership Level code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-5 Membership Level

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
BRONZE	0		
DIAMOND	1		
PLATINUM	2		



Membership Type

This DVM will convert the Membership Type used in OPERA Cloud to the Membership type used within Aristocrat Oasis (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Membership Type code that you previously created.
- **External Value:** This is the Aristocrat Oasis membership type that corresponds to the OPERA Cloud Membership Type.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-6 Membership Type

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
PTS	PTS		

Address Type

This DVM will convert the Address Type used in OPERA Cloud with the Address Type used in Aristocrat Oasis for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Address Type that exists in OPERA Cloud.
- **External Value:** This is the Address Type in Aristocrat Oasis that corresponds to the OPERA Cloud Address Type code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-7 Address Type







OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
HOME	1		
BUSINESS	2		

Table 6-7 (Cont.) Address Type

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
MAILING	4		

Document Type

This DVM will convert the Document Type used in OPERA Cloud with the Identification Type used in Aristocrat Oasis for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Document Type that exists in OPERA Cloud.
- **External Value:** This is the Identification Type in Aristocrat Oasis that corresponds to the OPERA Cloud Document Type code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-8 Document Type





OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External Cloud
Drivers License	D		
SSN Card	N		

Table 6-8 (Cont.) Document Type

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External Cloud
Passport	P		
Alien Registration	A		
Military ID	M		
State ID	S		
Voter ID	V		
Other	O		

Phone Type

This DVM converts the Phone Type used in OPERA Cloud with the Phone Type used in Aristocrat Oasis for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Phone Type that exists in OPERA Cloud.
- **External Value:** This is the Phone Type in Aristocrat Oasis that corresponds to the OPERA Cloud Phone Type code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Aristocrat Oasis uses the following nomenclature for phone types and e-mail types:

- Phone Type 1 is for Home.
- Phone Type 2 is for Work.
- Phone Type 3 is for Cell.
- E-mail Type 1 is for Home.
- E-mail Type 2 is for Work.

OPERA Cloud uses the Phone Type DVM to translate all profile communication types (home, e-mail, mobile, fax, and so on), which means some logic must exist in the background to match. For example, a Home e-mail type in OPERA Cloud to that same Home e-mail type in Aristocrat Oasis. You are unable to configure OPERA Cloud to translate Oasis type 1 to HOME (phone) and (home) EMAIL at the same time for the inbound messages. Therefore, the Home Email should be configured to translate to '1' on the OPERACloud > External direction and should be configured to translate to 'E_1' on the External > OPERA Cloud directions. The system translates '1' to 'E_1' from the Aristocrat response to do this logic on the OPERA Cloud DVM. This also applies to the Home Phone as well, you need to add a 'P_' prefix for phone communication channel.

Table 6-9 Phone Type









OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External Cloud
HOME PHONE	1		
HOME PHONE	P_1		
MOBILE PHONE	3		

Table 6-9 (Cont.) Phone Type

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External Cloud
MOBILE PHONE	P_3		
HOME EMAIL	1		
HOME EMAIL	E_1		
BUSINESS EMAIL	2		
BUSINESS EMAIL	E_2		

State Codes

This DVM will convert the State Code used in OPERA Cloud with the State Province Code used in Aristocrat Oasis for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the State Code that exists in OPERA Cloud.
- **External Value:** This is the State Province Code in Aristocrat Oasis that corresponds to the OPERA Cloud State Code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.

- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-10 States Codes













OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
AB	AB		
BC	BC		
MB	MB		
NB	NB		
NL	NL		
NS	NS		

Table 6-10 (Cont.) States Codes


OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
NT	NT		
NU	NU		
ON	ON		
PE	PE		
QC	QC		
SK	SK		

Table 6-10 (Cont.) States Codes













OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
YT	YT		
AK	AK		
AL	AL		
AR	AR		
AZ	AZ		
CA	CA		

Table 6-10 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
CO	CO		
CT	CT		
DC	DC		
DE	DE		
FL	FL		
GA	GA		

Table 6-10 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
HI	HI		
IA	IA		
ID	ID		
IL	IL		
IN	IN		
KS	KS		

Table 6-10 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
KY	KY		
LA	LA		
MA	MA		
MD	MD		
ME	ME		
MI	MI		

Table 6-10 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
MN	MN		
MO	MO		
MS	MS		
MT	MT		
NC	NC		
ND	ND		

Table 6-10 (Cont.) States Codes





OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
NE	NE		
NH	NH		
NJ	NJ		
NM	NM		
NV	NV		
NY	NY		

Table 6-10 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
OH	OH		
OK	OK		
OR	OR		
PA	PA		
RI	RI		
SC	SC		

Table 6-10 (Cont.) States Codes


















OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
SD	SD		
TN	TN		
TX	TX		
UT	UT		
VA	VA		
VT	VT		

Table 6-10 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
WA	WA		
WI	WI		
WV	WV		
WY	WY		

Business Events

In the context of Gaming Integration with Aristocrat Oasis, business events are used to send both profile updates to Aristocrat Oasis.

Please configure the below business events in OPERA Cloud in order to have these operations working. For details on configuring business events, refer to [Configuring Business Events](#) in the OPERA Cloud services documentation.

Profiles

Use the below details to create business events for OPERA Cloud Profiles.

- **Property:** Select your OPERA Cloud property.
- **External System:** Select the external system with the same name as the Outbound Configuration you previously created.
- **Module:** Select PROFILE.
- **Business Event:** Select UPDATE PROFILE.

- **Data Elements:** Select all available data elements.
- **Conditions:**
 - MEMBERSHIP NUMBER IS NOT NULL
 - MEMBERSHIP TYPE = 'PTS'
 - Ensure these conditions are used as 'AND' (do not use 'OR')

Business Events Configuration

Property: ARISOAS | External System: | Module: PROFILE | Database Code: | Business Event: UPDATE

Data Elements

Available

Q Filter [Go]

No values are available to select

Selected

Q Filter [Go]

Code	Description
A/R NUMBER	A/R NUMBER
ACCESS CH...	ACCESS CHANNEL
ACCESS CH...	ACCESS CHANNEL CODE
ACCESS CO...	ACCESS CODE
ACCESS INA...	ACCESS INACTIVE DATE
ACCESS RAT...	ACCESS RATE CODE
ACCESS RES...	ACCESS RESORTS
ACCESS UP...	ACCESS UPDATE DATE
ACCOUNT S...	ACCOUNT SOURCE
ACCOUNT T...	ACCOUNT TYPE

Navigation buttons: > >> < <<

Business Event Configuration

Search

Required Field: | Property: | External System: | Module: PROFILE | Database Code: |

Reset Search

View Options

Business Event

UPDATE PROFILE

IGT

The following operations are supported as part of this gaming integration product. Only the operations listed below are currently supported.

Table 6-11 Operations

Operation	How Does it Work?	Direction
Player Enrollment	<ul style="list-style-type: none"> • OPERA Cloud sends the name and address information for a new player profile or an existing OPERA Cloud profile to IGT. • IGT creates a player profile and responds to OPERA Cloud with the player ID. 	OPERA Cloud → IGT-Acres

Table 6-11 (Cont.) Operations

Operation	How Does it Work?	Direction
Profile Lookup (by first and last name and membership ID)	<ul style="list-style-type: none">• OPERA Cloud users can search IGT-Acres for profile(s) based on Player ID or Last and/or First Name.• IGT-Acres returns a list of profiles matching the criteria requested, which the OPERA Cloud user views on-screen.	OPERA Cloud → IGT-Acres
Profile Fetch (Profile Download)	<ul style="list-style-type: none">• The OPERA Cloud user selects a profile from a list provided during the Lookup operation.• IGT-Acres returns the patron's name, addresses, birth date, and email address; OPERA Cloud will either insert a new profile record or merge the data into an existing record.	OPERA Cloud → IGT-Acres
Profile Update	<ul style="list-style-type: none">• OPERA Cloud notifies IGT of any changes made to the name and/or address, telephone, and email on any OPERA Cloud profile that has an associated IGT player ID.	OPERA Cloud → IGT-Acres
Reservation Notification	<ul style="list-style-type: none">• When a reservation is created/changed or cancelled, OPERA Cloud sends a notification message (including reservation status) to IGT for the associated player.	OPERA Cloud → IGT-Acres

Table 6-11 (Cont.) Operations

Operation	How Does it Work?	Direction
Comp Postings (including reverse)	<ul style="list-style-type: none">• OPERA Cloud sends a comp request to IGT-Acres when a charge is posted to a comp window (101-108). A comp posting is any charge that was moved to a comp window, regardless of whether it was originally posted manually, through the End of Day sequence, or by POS interface to OPERA Cloud.• To void a comp transaction, you must move back to a cash window (1-8). A Void is then sent to IGT-Acres.• IGT-Acres will either approve or decline the comp posting. Approval status appears on the OPERA Cloud Comp Journal screen.• OPERA Cloud sends comp postings to IGT-Acres in monetary value / amount only.	OPERA Cloud → IGT-Acres

 **Note:**

Do not move transactions between comp windows (101-108).

Table 6-11 (Cont.) Operations

Operation	How Does it Work?	Direction
Player Snapshot/ PTS Inquiry (Player Statistics) (view only)	<ul style="list-style-type: none"> OPERA Cloud users can view basic, real-time balances and account information by sending a Player Statistics request from OPERA Cloud to IGT. This information is never stored in OPERA Cloud. IGT responds with values that appear on the screen with OPERA Cloud. For example, comp dollar or points balance. The scope of data sent is not configured in OPERA Cloud. 	OPERA Cloud → IGT-Acres
Player Promotions/Offer (view only)	<ul style="list-style-type: none"> Promotion/Offer codes must be created for both OPERA Cloud and IGT. OPERA Cloud users can click Fetch Offer from the Look to Book screen to view promotions/offers available for the player. 	OPERA Cloud → IGT-Acres

The following Bucket Types are supported in this product:

Table 6-12 Bucket Types

Folio Numbers	Bucket Type
101	Other
102	Point
103	Primary Comp
104	Rewards
105	Secondary Comp
106	Non-Gaming
107	Coupon
108	Promotional

Required Information

The integration with your IGT system is done using ADI. For OPERA Cloud to connect to ADI, the following information is required:

- ADI CRM HTTP server endpoints
If your postings run on a different server or port, the following details are also required:
- ORACLEUSER: This is a generic user created to perform postings.
- Site ID for CRM operations


- Site ID for Comp Posting operations

OPERA Cloud Outbound Configuration for IGT


A new outbound system configuration is required for OPERA Cloud to connect to IGT.

For additional details on creating an outbound configuration, refer to [Configuring Outbound Systems](#) in the OPERA Cloud Services documentation.


1. Log in to OPERA Cloud and click the **vertical ellipsis** and select **Toolbox**.

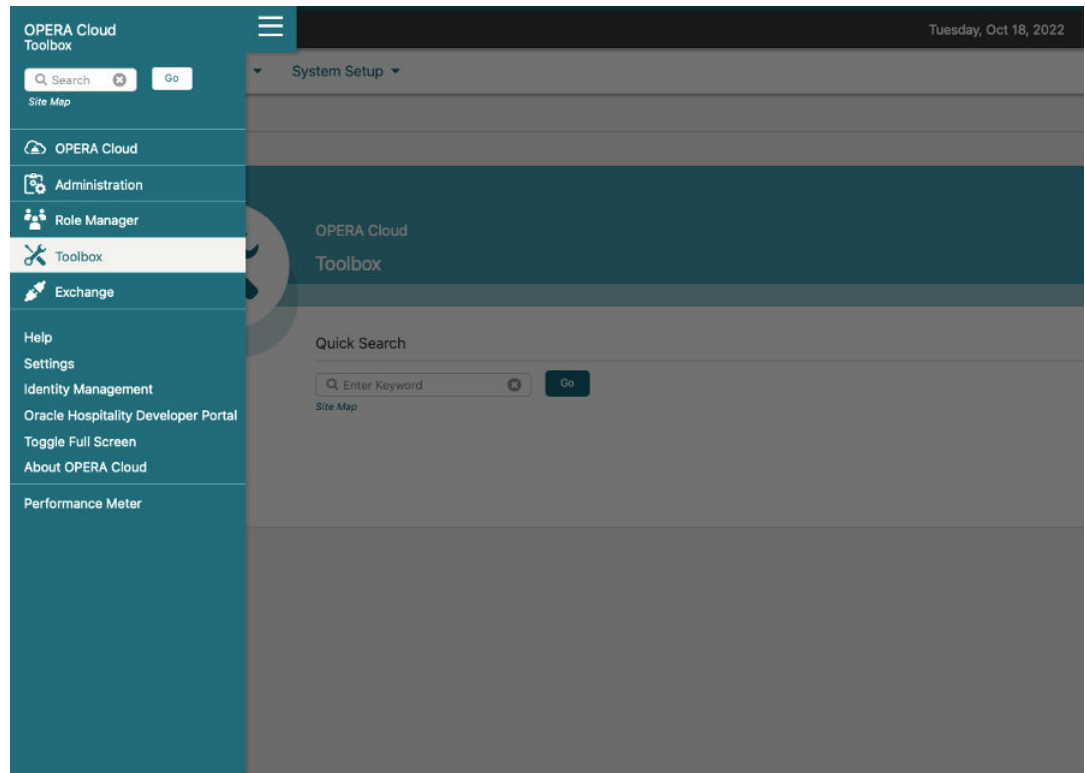

2. Select **System Setup**, select **Outbound**, and then select **Outbound Configuration**.

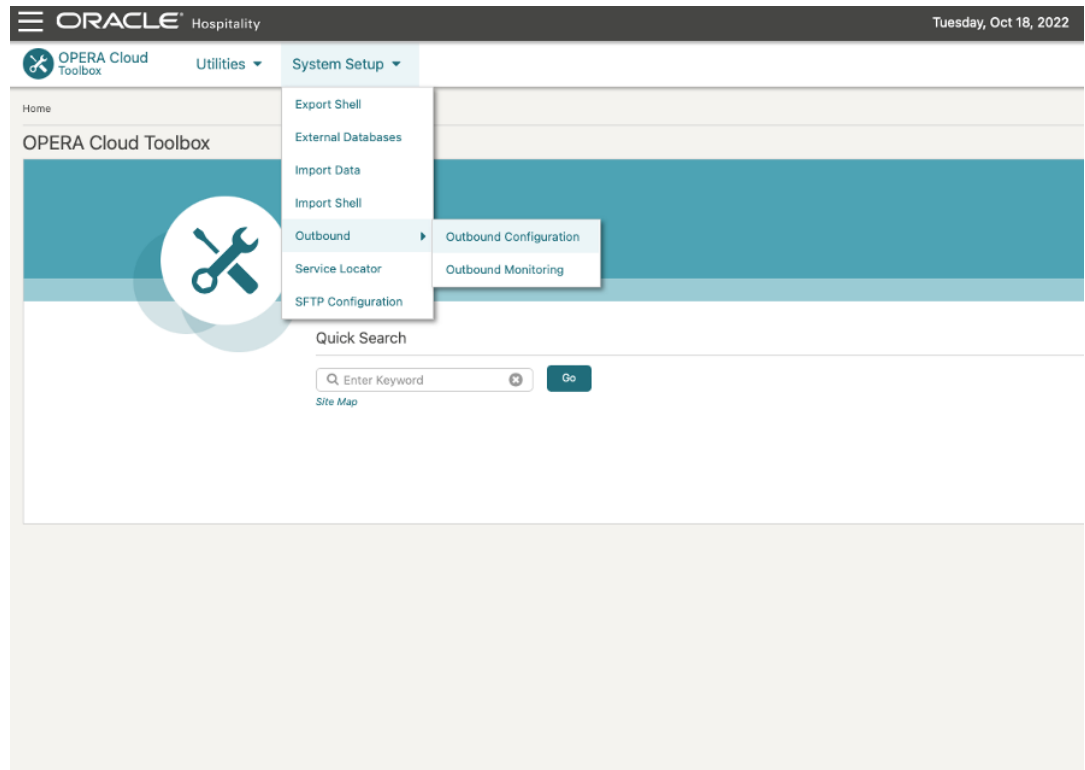

3. Select the **Property** and then click **New** to set up the new Outbound Configuration.

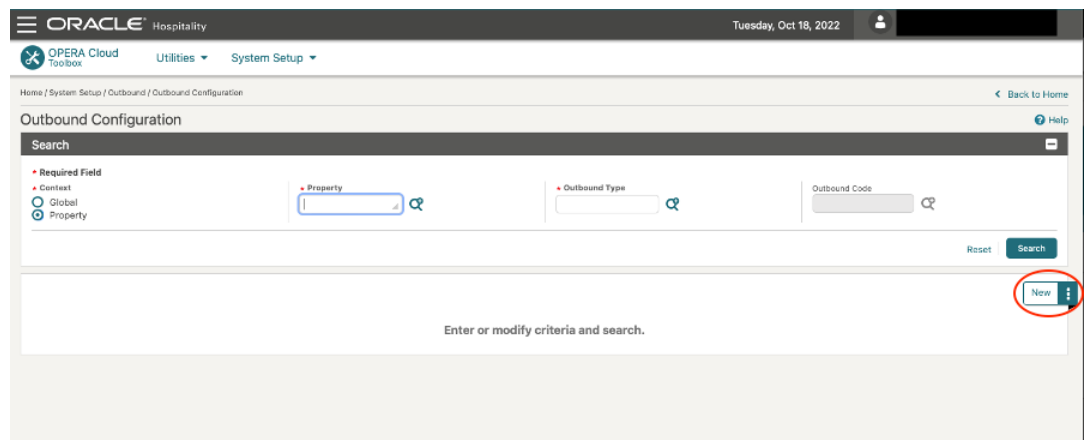

The screenshot displays the 'Outbound System Configuration' page in the Oracle Hospitality OPERA Cloud interface. The page is titled 'Outbound System Configuration' and includes a 'Help' link. It features several sections for configuration:

- Required Field:** Includes 'Context' (Global/Property), 'Outbound Code', 'Outbound Description', 'Outbound Type', 'Authorization Type' (OAUTH), 'Service Account' (username/password), 'OAuth Token Url', 'Grant Type' (Password), 'Client Id', 'Client Key', 'Application Key', 'Enable External System', 'Enable Conversions', and 'Bypass Proxy'.
- Buttons:** 'Cancel' and 'Save' buttons are located at the bottom right.

4. Complete the following fields and click **Save**. For the specific details on each field and how to create an Outbound Configuration, see [Managing Outbound System Configuration](#) in the OPERA Cloud Services documentation.
 - a. **Context:** Select the **Property** option.
 - b. **Property:** Select the property for which this configuration is being set up.
 - c. **Outbound Type:** Select **GAMING_CUSTOM** from the list of options.
 - d. **Outbound Code:** Provide the unique identifier (for example: IGT_{Property_Name}).
 - e. **Outbound Description:** Provide the description (optional).
 - f. **Authorization Type:** Select **NONE** from the list of options. By selecting this option, all other Authorization related fields no longer appear.
 - g. **Application Key:** Leave this field blank.
 - h. **Enable External System:** Select this option.
 - i. **Enable Conversions:** Select this option.
 - j. **External Property:** Enter the **Site ID** provided by IGT.
 - k. **Bypass Proxy:** Select this option.

Once the configuration is saved, the final configuration is shown below:

Outbound System Configuration

Required Field

Context
Property
Property
Outbound Type
GAMING_CUSTOM

Outbound Code
Outbound Description
Gaming custom configuration for IGT

Protocol
REST
☒ Enable External System
☒ Enable Conversions
External Property
1

Authorization Type
NONE

Application Key
your identifier for external system

☒ Bypass Proxy

Service Details

[View Options](#)

Service Name
RESTAPIBaseURL

Service Path

5. Add the following Custom Headers for this outbound configuration. Click the **I Want To...** from the search results row where you want to define Custom Headers.

Once the configuration is saved, the final configuration is shown below:

[View Options](#)

I Want To...

Property

Outbound Code

Outbound Description

Outbound Type

IGT Outbound configuration for ... GAMING_CUSTOM

I Want To...

- Modify/Update
- Data Value Mappings
- Custom Headers**

Header Name	Header Value
CompPostingURL	This is the URL that is going to be used for the Comp Posting operations.
HotelID	The Site ID from IGT.
UserID	The UserID used in CRM operations.
CompPostingUserId	The MicrosUserId.


Once the above fields are completed, save the outbound configuration and proceed to [Data Value Mappings](#) (DVM).

DVMs for IGT

The following Data Value Mappings (DVMs) must be set up for the IGT system to correctly integrate with OPERA Cloud. For details on how to create DVMs within OPERA Cloud, see [Data Value Mappings](#) in the OPERA Cloud Services documentation.

The below DVM values are for reference only and can vary by property.


Click **I Want To . . .** and select **Data Value Mapping** to edit the Data Value Mappings accordingly.

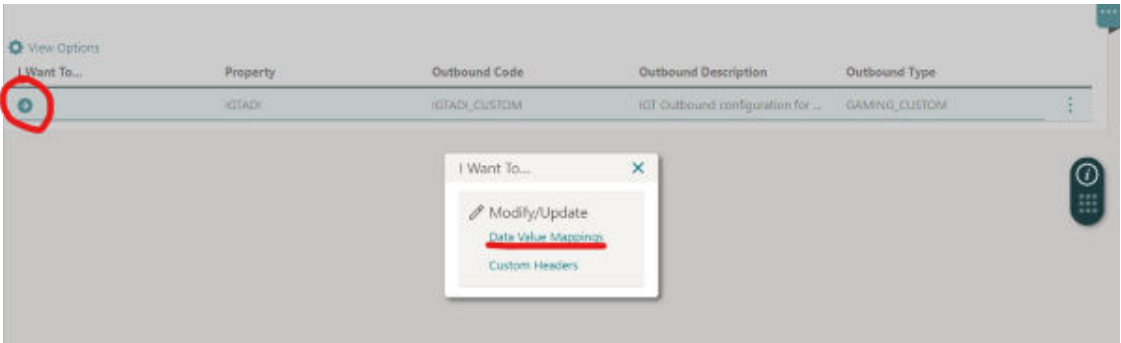

Country Codes

This DVM will convert the Country Code used in OPERA Cloud with the Country Code used in IGT for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

 **Note:**

This list follows the ISO 3166.

- **OPERA Cloud Code:** This is the Country Code used in OPERA Cloud.
- **External Value:** This is the Country Code in IGT that corresponds to the OPERA Cloud Country Code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-13 Country Codes





OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Afghanistan	4		
Albania	8		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Algeria	12		
American Samoa	16		
Andorra	20		
Angola	24		
Anguilla	660		
Antarctica	10		
Antigua and Barbuda	28		

Table 6-13 (Cont.) Country Codes


OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Argentina	32		
Armenia	51		
Aruba	533		
Australia	36		
Austria	40		
Azerbaijan	31		
Bahamas (the)	44		

Table 6-13 (Cont.) Country Codes















OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Bahrain	48		
Bangladesh	50		
Barbados	52		
Belarus	112		
Belgium	56		
Belize	84		
Benin	204		

Table 6-13 (Cont.) Country Codes



OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Bermuda	60		
Bhutan	64		
Bolivia (Plurinational State of)	68		
Bonaire, Sint Eustatius and Saba	535		
Bosnia and Herzegovina	70		
Botswana	72		
Bouvet Island	74		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Brazil	76		
British Indian Ocean Territory (the)	86		
Brunei Darussalam	96		
Bulgaria	100		
Burkina Faso	854		
Burundi	108		
Cabo Verde	132		

Table 6-13 (Cont.) Country Codes




OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Cambodia	116		
Cameroon	120		
Canada	124		
Cayman Islands (the)	136		
Central African Republic (the)	140		
Chad	148		
Chile	152		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
China	156		
Christmas Island	162		
Cocos (Keeling) Islands (the)	166		
Colombia	170		
Comoros (the)	174		
Congo (the Democratic Republic of the)	180		
Congo (the)	178		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Cook Islands (the)	184		
Costa Rica	188		
Croatia	191		
Cuba	192		
Curaao	531		
Cyprus	196		
Czechia	203		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Cte d'Ivoire	384		
Denmark	208		
Djibouti	262		
Dominica	212		
Dominican Republic (the)	214		
Ecuador	218		
Egypt	818		

Table 6-13 (Cont.) Country Codes






OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
El Salvador	222		
Equatorial Guinea	226		
Eritrea	232		
Estonia	233		
Eswatini	748		
Ethiopia	231		
Falkland Islands (the) [Malvinas]	238		

Table 6-13 (Cont.) Country Codes







OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Faroe Islands (the)	234		
Fiji	242		
Finland	246		
France	250		
French Guiana	254		
French Polynesia	258		
French Southern Territories (the)	260		

Table 6-13 (Cont.) Country Codes














OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Gabon	266		
Gambia (the)	270		
Georgia	268		
Germany	276		
Ghana	288		
Gibraltar	292		
Greece	300		

Table 6-13 (Cont.) Country Codes














OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Greenland	304		
Grenada	308		
Guadeloupe	312		
Guam	316		
Guatemala	320		
Guernsey	831		
Guinea	324		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Guinea-Bissau	624		
Guyana	328		
Haiti	332		
Heard Island and McDonald Islands	334		
Holy See (the)	336		
Honduras	340		
Hong Kong	344		

Table 6-13 (Cont.) Country Codes














OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Hungary	348		
Iceland	352		
India	356		
Indonesia	360		
Iran (Islamic Republic of)	364		
Iraq	368		
Ireland	372		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Isle of Man	833		
Israel	376		
Italy	380		
Jamaica	388		
Japan	392		
Jersey	832		
Jordan	400		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Kazakhstan	398		
Kenya	404		
Kiribati	296		
Korea (the Democratic People's Republic of)	408		
Korea (the Republic of)	410		
Kuwait	414		
Kyrgyzstan	417		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Lao People's Democratic Republic (the)	418		
Latvia	428		
Lebanon	422		
Lesotho	426		
Liberia	430		
Libya	434		
Liechtenstein	438		

Table 6-13 (Cont.) Country Codes













OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Lithuania	440		
Luxembourg	442		
Macao	446		
Madagascar	450		
Malawi	454		
Malaysia	458		
Maldives	462		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Mali	466		
Malta	470		
Marshall Islands (the)	584		
Martinique	474		
Mauritania	478		
Mauritius	480		
Mayotte	175		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Mexico	484		
Micronesia (Federated States of)	583		
Moldova (the Republic of)	498		
Monaco	492		
Mongolia	496		
Montenegro	499		
Montserrat	500		

Table 6-13 (Cont.) Country Codes





OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Morocco	504		
Mozambique	508		
Myanmar	104		
Namibia	516		
Nauru	520		
Nepal	524		
Netherlands (the)	528		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
New Caledonia	540		
New Zealand	554		
Nicaragua	558		
Niger (the)	562		
Nigeria	566		
Niue	570		
Norfolk Island	574		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
North Macedonia	807		
Northern Mariana Islands (the)	580		
Norway	578		
Oman	512		
Pakistan	586		
Palau	585		
Palestine, State of	275		

Table 6-13 (Cont.) Country Codes





OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Panama	591		
Papua New Guinea	598		
Paraguay	600		
Peru	604		
Philippines (the)	608		
Pitcairn	612		
Poland	616		

Table 6-13 (Cont.) Country Codes














OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Portugal	620		
Puerto Rico	630		
Qatar	634		
Romania	642		
Russian Federation (the)	643		
Rwanda	646		
Runion	638		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Saint Barthlemy	652		
Saint Helena, Ascension and Tristan da Cunha	654		
Saint Kitts and Nevis	659		
Saint Lucia	662		
Saint Martin (French part)	663		
Saint Pierre and Miquelon	666		
Saint Vincent and the Grenadines	670		

Table 6-13 (Cont.) Country Codes











OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Samoa	882		
San Marino	674		
Sao Tome and Principe	678		
Saudi Arabia	682		
Senegal	686		
Serbia	688		
Seychelles	690		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Sierra Leone	694		
Singapore	702		
Sint Maarten (Dutch part)	534		
Slovakia	703		
Slovenia	705		
Solomon Islands	90		
Somalia	706		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
South Africa	710		
South Georgia and the South Sandwich Islands	239		
South Sudan	728		
Spain	724		
Sri Lanka	144		
Sudan (the)	729		
Suriname	740		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Svalbard and Jan Mayen	744		
Sweden	752		
Switzerland	756		
Syrian Arab Republic (the)	760		
Taiwan (Province of China)	158		
Tajikistan	762		
Tanzania, the United Republic of	834		

Table 6-13 (Cont.) Country Codes















OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Thailand	764		
Timor-Leste	626		
Togo	768		
Tokelau	772		
Tonga	776		
Trinidad and Tobago	780		
Tunisia	788		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Turkey	792		
Turkmenistan	795		
Turks and Caicos Islands (the)	796		
Tuvalu	798		
Uganda	800		
Ukraine	804		
United Arab Emirates (the)	784		





Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
United Kingdom of Great Britain and Northern Ireland (the)	826		
United States Minor Outlying Islands (the)	581		
United States of America (the)	840		
Uruguay	858		
Uzbekistan	860		
Vanuatu	548		
Venezuela (Bolivarian Republic of)	862		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Viet Nam	704		
Virgin Islands (British)	92		
Virgin Islands (U.S.)	850		
Wallis and Futuna	876		
Western Sahara*	732		
Yemen	887		
Zambia	894		

Table 6-13 (Cont.) Country Codes

OPERA Cloud Value	External Code (aka IGT)	External > OPERA Cloud	OPERA Cloud > External
Zimbabwe	716		
land Islands	248		

Membership Level

This DVM will convert the Membership Levels codes previously created into the IGT Ranking Levels (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Membership Level code that you previously created.
- **External Value:** This is the Ranking Code in IGT that corresponds to the OPERA Cloud Membership Level code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-14 Membership Level







OPERA Cloud Code	External Code	External > OPERA Cloud	OPERA Cloud > External
BRONZE	1		

Table 6-14 (Cont.) Membership Level

OPERA Cloud Code	External Code	External > OPERA Cloud	OPERA Cloud > External
DIAMOND	2		
PLATINUM	3		



Membership Type

This DVM will convert the Membership Type codes used in OPERA Cloud Membership Types into IGT codes (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Membership Type code that you previously created.
- **External Code:** This is the IGT Membership Type code that corresponds to the OPERA Cloud Membership Type code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-15 Membership Type

OPERA Cloud Code	External Code	External > OPERA Cloud	OPERA Cloud > External
PTS	PTS		





Address Type

This DVM will convert the Address Type used in OPERA Cloud with the Location used in IGT for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Address Type that exists in OPERA Cloud.
- **External Value:** This is the Location in IGT that corresponds to the OPERA Cloud Address Type code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-16 Address Type

OPERA Cloud Code	External Code	External > OPERA Cloud	OPERA Cloud > External
HOME	Home		
WORK	Work		





Document Type

This DVM will convert the Document Type used in OPERA Cloud with the Identification Type used in IGT for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Document Type that exists in OPERA Cloud.
- **External Value:** This is the Identification Type in IGT that corresponds to the OPERA Cloud Document Type code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-17 Document Type

OPERA Cloud Code	External Code	External > OPERA Cloud	OPERA Cloud > External Cloud
DL	Drivers License		
SC	SSN		

Phone Type

This DVM converts the Phone Type used in OPERA Cloud with the Phone Location used in IGT for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Phone Type that exists in OPERA Cloud.
- **External Value:** This is the Phone Location in IGT that corresponds to the OPERA Phone Type code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-18 Phone Type









OPERA Cloud Code	External Code	External > OPERA Cloud	OPERA Cloud > External Cloud
HOME	Home		

Table 6-18 (Cont.) Phone Type

OPERA Cloud Code	External Code	External > OPERA Cloud	OPERA Cloud > External Cloud
MOBILE	Mobile		
EMAIL	Main Email		
BUSINESS	Business		

Transaction Codes

This DVM converts the Transaction Codes used in OPERA Cloud with the Comp Type Reference Code used in IGT for messages being sent from OPERA Cloud (mainly for the Comp Posting operation).

Table 6-19 Comp Type Reference Codes

Comp Name	Comp Type Code
Buffet Comp	BUF
Dollar Comp	DOL
Penny Comp_Auto	PEN
Gift Comp	GIF
Room Comp	ROM

The values in the table below are just for illustration purposes. All transactions (including generates transactions) comped with PTS must be included. To complete this DVM, you need the following:



- **OPERA Cloud Code:** This is the Transaction Code that exists in OPERA Cloud.
- **External Value:** This is the Comp Type Reference Code in IGT that corresponds to the OPERA Cloud Transaction code.
- **External > OPERA Cloud:** Deselect this option as inbound messages are not translated in OPERA Cloud for Transaction Codes.

- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA10001.

Table 6-20 Transaction Codes

OPERA Cloud Code	External Code	External > OPERA Cloud	OPERA Cloud > External Cloud
10001	ROM		
10002	DOL		
10009	DOL		
100123	BUF		
102511	DOL		
55904	PEN		

Table 6-20 (Cont.) Transaction Codes

OPERA Cloud Code	External Code	External > OPERA Cloud	OPERA Cloud > External Cloud
99502	GIF		

State Codes

This DVM will convert the State Code used in OPERA Cloud with the State Province Code used in IGT for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the State Code that exists in OPERA Cloud.
- **External Value:** This is the State Province Code in IGT that corresponds to the OPERA Cloud State Code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-21 States Codes





OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
AB	AB		
BC	BC		

Table 6-21 (Cont.) States Codes







OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
MB	MB		
NB	NB		
NL	NL		
NS	NS		
NT	NT		
NU	NU		

Table 6-21 (Cont.) States Codes




OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
ON	ON		
PE	PE		
QC	QC		
SK	SK		
YT	YT		
AK	AK		

Table 6-21 (Cont.) States Codes






OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
AL	AL		
AR	AR		
AZ	AZ		
CA	CA		
CO	CO		
CT	CT		

Table 6-21 (Cont.) States Codes







OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
DC	DC		
DE	DE		
FL	FL		
GA	GA		
HI	HI		
IA	IA		

Table 6-21 (Cont.) States Codes












OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
ID	ID		
IL	IL		
IN	IN		
KS	KS		
KY	KY		
LA	LA		

Table 6-21 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
MA	MA		
MD	MD		
ME	ME		
MI	MI		
MN	MN		
MO	MO		

Table 6-21 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
MS	MS		
MT	MT		
NC	NC		
ND	ND		
NE	NE		
NH	NH		

Table 6-21 (Cont.) States Codes









OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
NJ	NJ		
NM	NM		
NV	NV		
NY	NY		
OH	OH		
OK	OK		

Table 6-21 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
OR	OR		
PA	PA		
RI	RI		
SC	SC		
SD	SD		
TN	TN		

Table 6-21 (Cont.) States Codes















OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
TX	TX		
UT	UT		
VA	VA		
VT	VT		
WA	WA		
WI	WI		

Table 6-21 (Cont.) States Codes

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
WV	WV		
WY	WY		

Credit Account

The information regarding Player Credit Account is received from IGT to indicate if the guest has a credit account in IGT or not. If the profile has a credit account, OPERA user should not be able to change it using OPERA Cloud. To ensure that credit accounts are not changed, it is necessary to disable the **Override Profile Protection** option in the **Roles**. The below details can be used to deactivate it.

OPERA Cloud Control Profile Protection

From the **OPERA Cloud Administration** menu, select **Enterprise** and then select **OPERA Controls** to activate the **Profile Protection** function, under the **Group Profile**, and set it with **BY PROFILE**:



OPERA Cloud Profile Protection Rules

1. From the **OPERA Cloud Administration** menu, select **Client Relations**, select **Profile Management**, and then select **Profile Protection** to set the protection rules.
2. Search for IGT property and then click **Edit**.
3. Select the **Profile Type** as "Guest" and then select the **Screen** or **Field Name** that needs to be protected:

Screen / Field Name	Profile Type					
	Company	Contact	Group	Guest	Source	Travel Agent
Profile Details	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sales Information	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Communication	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Mailings	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Privacy	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Identification	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Attachments	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Payment and Instructions	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Channel Rate	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Membership	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Negotiated Rate	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Preferences	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Relationships	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Profile Notes	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Owner	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Commissions	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
User Defined Fields	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- Click **Save** to save the changes.

OPERA Cloud Role Manager

- From OPERA Cloud **Role Manager**, select **Manage Chain Roles**.
- Enter search criteria for **Role ALLTask**, then click **Search**.
- Select the role, then click the vertical ellipsis **Actions** menu and select **Edit**.

Role	Display Name	Internal	Department Code
ALLTASK	EIDEVS-ALLTASK	<input type="checkbox"/>	

- Filter by Protection and disable the **Override Profile Protection** option.

Main Tasks	Selected Tasks (7)
Client Relations	102/121
Financial Admin	236/241
Client Relations Admin	220/235

Available Tasks
<input checked="" type="checkbox"/> Profiles Management
<input type="checkbox"/> Override Profile Protection
<input type="checkbox"/> Override Profile Protection For Contact Profile
<input type="checkbox"/> Override Profile Protection For Guest Profile
<input type="checkbox"/> Override Profile Protection For Source Profile
<input type="checkbox"/> Override Profile Protection For Travel Agent Profile
<input type="checkbox"/> Override Profile Protection For Company Profile
<input type="checkbox"/> Override Profile Protection For Group Profile

- Click **Save** to save the changes.

Business Events

In the context of Gaming Integration with IGT, business events are used to send both profile updates and reservation notifications to IGT.

For these operations to work, you must configure the below business events in OPERA Cloud. For details on configuring business events, refer to [Configuring Business Events](#) in the OPERA Cloud services documentation.

Profiles

Use the below details to create business events for OPERA Cloud Profiles.

- **Property:** Select your OPERA Cloud property.
- **External System:** Select the external system with the same name as the Outbound Configuration you previously created.
- **Module:** Select PROFILE.
- **Business Event:** Select UPDATE PROFILE.
- **Data Elements:** Select all available data elements.
- **Conditions:**
 - MEMBERSHIP NUMBER IS NOT NULL
 - MEMBERSHIP TYPE = 'PTS'
 - Ensure these conditions are used as 'AND' (do not use 'OR')

The screenshot shows the 'Business Events Configuration' interface. At the top, there are four tabs: 'Property', 'Module' (selected, showing 'PROFILE'), 'Database Code', and 'Business Event' (showing 'UPDATE PROFILE'). Below these is the 'Data Elements' section, which is divided into 'Available' and 'Selected' columns. Each column has a search bar and a 'Go' button. Between the columns are navigation buttons: '>', '>>', '<<', and '<'. Below the 'Data Elements' section is the 'Conditions' section, which contains a list of conditions: 'AND MEMBERSHIP NUMBER IS NOT NULL' and 'AND MEMBERSHIP TYPE = 'PTS''. There is an 'Add' button next to the conditions list. Below the conditions is a 'Filter Conditions' section with the text 'AND MEMBERSHIP NUMBER IS NOT NULL AND MEMBERSHIP TYPE = 'PTS''.

The screenshot shows the 'Business Event Configuration' interface with the 'Search' section active. It features a search bar and several filters: 'Required Field', 'Property', 'External System', 'Module' (set to 'PROFILE'), and 'Database Code'. There are 'Reset' and 'Search' buttons. Below the search section is a 'View Options' section with a 'Business Event' dropdown menu showing 'UPDATE PROFILE'. There is also a 'New' button with a plus icon.

Reservations

Use the below details to create business events for OPERA Cloud Reservations.

- **Property:** Select your OPERA Cloud property.
- **External System:** Select the external system with the same name as the Outbound Configuration you previously created.

- **Module:** Select RESERVATION.
- **Business Event:** Select NEW RESERVATION.
- **Data Elements:** Select all available data elements.
- **Conditions:**
 - MEMBERSHIP NUMBER IS NOT NULL
 - MEMBERSHIP TYPE = 'PTS'
 - Ensure these conditions are used as 'AND' (do not use 'OR')

The screenshot shows the 'Business Events Configuration' window. At the top, there are tabs for 'Property', 'Module' (set to 'RESERVATION'), 'Database Code', and 'Business Event' (set to 'NEW RESERVATION'). Below these is the 'Data Elements' section, which is divided into 'Available' and 'Selected' columns. Each column has a search filter and a 'Go' button. Between the columns are navigation buttons: '>', '>>', '<<', and '<'. Below the data elements is the 'Conditions' section, which contains a list of conditions: 'AND MEMBERSHIP NUMBER IS NOT NULL' and 'MEMBERSHIP TYPE = 'PTS''. There is an 'Add' button next to the conditions list. At the bottom, there is a 'Filter Conditions' section with the text 'AND MEMBERSHIP NUMBER IS NOT NULL MEMBERSHIP TYPE = 'PTS''.

Repeat the above steps to create business events for the following Reservation Modules:

- ADVANCE CHECK IN
- CANCEL
- CHECK IN
- CHECK OUT
- NEW RESERVATION
- NO SHOW
- REVERSE CHECK IN
- REVERSE CHECK OUT
- ROLLBACK CANCEL
- UPDATE RESERVATION
- JOIN GUEST
- SEPARATE GUEST FROM SHARE


Membership Number automatically assigned to Reservations

For the updates of a new reservation to be integrated, the membership number of the profile should be attached to the reservation

For automatic update of membership number:

1. From the **Administration** menu, select **Client Relations, Membership Management**, and then **Membership Types**.
2. Search for **Membership Type** as 'PTS' and click **Search**.
3. Select the membership type and click the vertical ellipses **Actions** menu and select **Edit**.
4. Click **Membership Handling**.
5. Click **Edit** and complete the following:
6. Select the Membership Action as **Auto Attach** for attaching memberships to a reservation:
7. Next select the lifecycle of the reservation when you want the membership action to be taken:
 - a. **New Reservation**: Select if the Membership Action should be taken when the reservation is created.
 - b. **Update Reservation**: Select if the Membership Action should be taken when an existing reservation is accessed.
8. Click **Save**.

9.

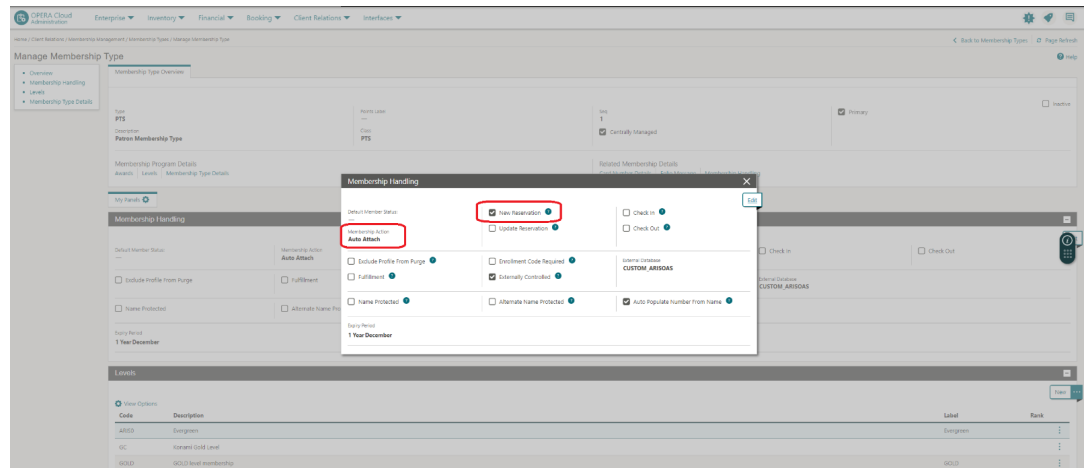

OPERA Cloud Flex Fields

This integration solution makes use of some flex fields for specific use cases. If you also use flex fields as part of your OPERA Cloud configuration, review these flex fields to ensure there are no conflicts between them.

- **Profile Preferred Name:** Flex field UDFC40 is used to store the guest preferred name and this information is being integrated to IGT.
- **Player Credit Account:** Flex field UDFN40 is used to store the player credit account flag from IGT. This information is received from IGT to indicate if the guest has a credit account in IGT.

Aristocrat Loyalty


The following operations are supported as part of this gaming integration product. Only the operations listed below are currently supported.

Table 6-22 Aristocrat Loyalty

Function	How it works	Direction
Player Enrollment	<ul style="list-style-type: none"> • OPERA Cloud sends the name and address information for a new player profile to Loyalty. • Loyalty creates a player profile and responds to OPERA Cloud with the player ID. 	OPERA Cloud→ LOYALTY
Profile Lookup	<ul style="list-style-type: none"> • OPERA Cloud users can search Loyalty for profile(s) based on Player ID or Last and/or First Name. • Loyalty returns a list of profiles matching the criteria requested, which the OPERA Cloud user views on-screen. 	OPERA Cloud → LOYALTY
Profile Fetch	<ul style="list-style-type: none"> • The OPERA Cloud user selects a profile from a list provided during the Lookup operation. • Loyalty returns the patron's name, addresses, birth date, and email address; OPERA Cloud will either insert a new profile record or merge the data into an existing record. 	OPERA Cloud → LOYALTY

Table 6-22 (Cont.) Aristocrat Loyalty

Function	How it works	Direction
Profile Update	OPERA Cloud notifies Loyalty of any changes made to the name and/or address, telephone, and email on any OPERA Cloud profile that has an associated Loyalty Player Id.	OPERA Cloud → LOYALTY
Reservation Notification	When a reservation is created/changed or cancelled, OPERA Cloud sends a notification message (including reservation status) to Loyalty for the associated player.	OPERA Cloud → LOYALTY
Comp Postings	<ul style="list-style-type: none"> OPERA Cloud sends a comp request to Loyalty when a charge is posted to a comp window (101-108). A comp posting is any charge that was moved to a comp window, regardless of whether it was originally posted manually, through the End of Day sequence, or by POS interface to OPERA Cloud. To void a comp transaction, you must move back to a cash window (1-8). A Void is then sent to Loyalty. Loyalty will either approve or decline the comp posting. Approval status appears on the OPERA Cloud Comp Journal screen. OPERA Cloud sends comp postings to Loyalty in monetary value / amount only. OPERA Cloud sends comps monetary value / amount to only one default bucket in Loyalty. 	OPERA Cloud → LOYALTY

 **Note:**
Do not move transactions between comp windows (101-108).

Required Information

To invoke the Loyalty webservices from OPERA Cloud, below are the required details that needs to be requested for configuration:

- Webservice URL for PartnerNameService [ex: http://{hostname}:{port}/PartnerNameService]
- Webservice URL for PartnerGamingService [ex: http://{hostname}:{port}/PartnerGamingService]
- Webservice URL for PartnerReservationService [ex: http://{hostname}:{port}/PartnerReservationService]

The integration between OPERA Cloud and Aristocrat Loyalty uses the following Webservice operations.

Table 6-23 Webservice operations

Webservice	Operation	Function
PartnerNameService	ProfileLookup	Profile Lookup
PartnerNameService	FetchProfile	Profile Fetch
PartnerGamingService, PartnerNameService	EnrollProfile, FetchProfile	Profile Enrollment
PartnerNameService	UpdateProfile	Profile Update
PartnerReservationService	ReservationNotifi cation	Reservation Notification
PartnerGamingService	CompPost	Comp Postings


For further details on Loyalty configurations, please get in touch with your Aristocrat Loyalty point of contact or your Oracle Hospitality point of contact.

OPERA Cloud Outbound Configuration for Aristocrat Loyalty


A new outbound system configuration is required for OPERA Cloud to connect to Loyalty.

For additional details on creating an outbound configuration, refer to [Configuring Outbound Systems](#) in the OPERA Cloud Services documentation.


1. Log in to OPERA Cloud and click the **vertical ellipsis** and select **Toolbox**.

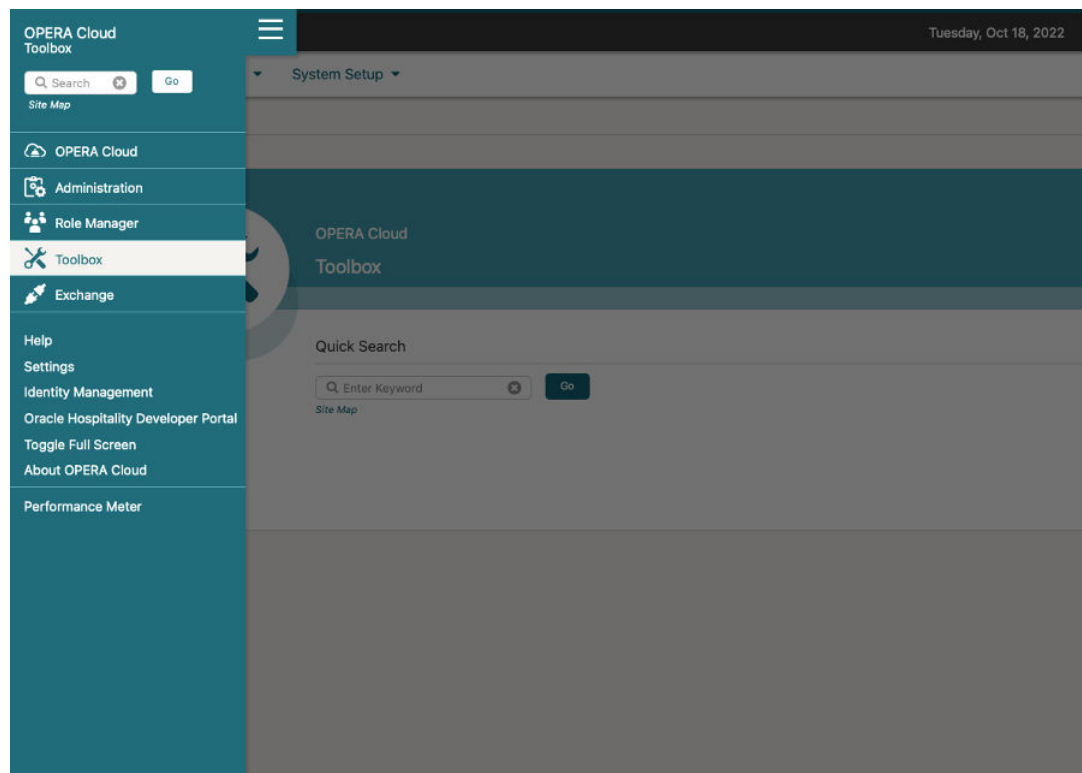

2. Select **System Setup**, select **Outbound**, and then select **Outbound Configuration**.

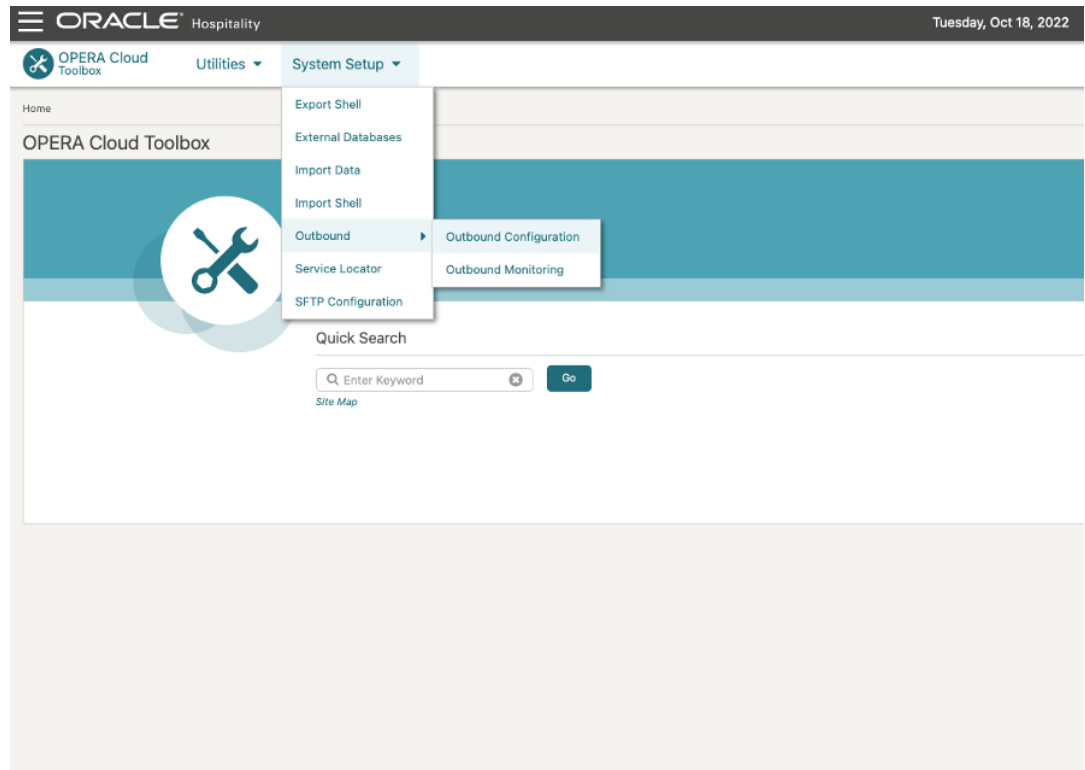

3. Select the **Property** and then click **New** to set up the new Outbound Configuration.

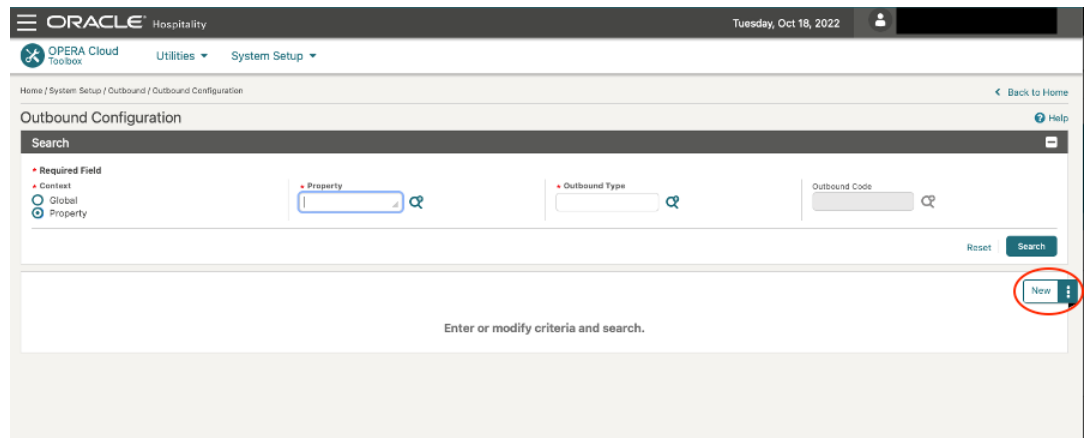

4. Complete the following fields and click **Save**. For the specific details on each field and how to create an Outbound Configuration, see [Managing Outbound System Configuration](#) in the OPERA Cloud Services documentation.
 - a. **Context:** Select the **Property** option.
 - b. **Property:** Select the property for which this configuration is being set up.
 - c. **Outbound Type:** Select **GAMING_CUSTOM** from the list of options.
 - d. **Outbound Code:** Provide the unique identifier (for example: LOY_{Property_Name}).
 - e. **Outbound Description:** Provide the description (optional).
 - f. **Authorization Type:** Select **NONE** from the list of options. By selecting this option, all other Authorization related fields no longer appear.


- g. **Application Key:** Leave this field blank.
- h. **Enable External System:** Select this option.
- i. **Enable Conversions:** Select this option.
- j. **External Property:** Enter the **Site Id** or **Hotel Id** provided by Aristocrat Loyalty.
- k. **Bypass Proxy:** Select this option.
- l. **RESTAPIBaseURL:** Type the webservice url of the PartnerNameService (used for CRM operations). [ex: http://{hostname}:{port}/PartnerNameService]

Once the configuration is saved, proceed to Custom Headers and DVM configurations.

5. Add the following Custom Headers for this outbound configuration. Click the **I Want To...** from the search results row where you want to define Custom Headers.

Once the configuration is saved, the final configuration is shown below:

Header Name	Header Value
CompPostingURL	Webservice URL for PartnerGamingService, used for Comp Posting operations [ex: http://{hostname}:{port}/PartnerGamingService]

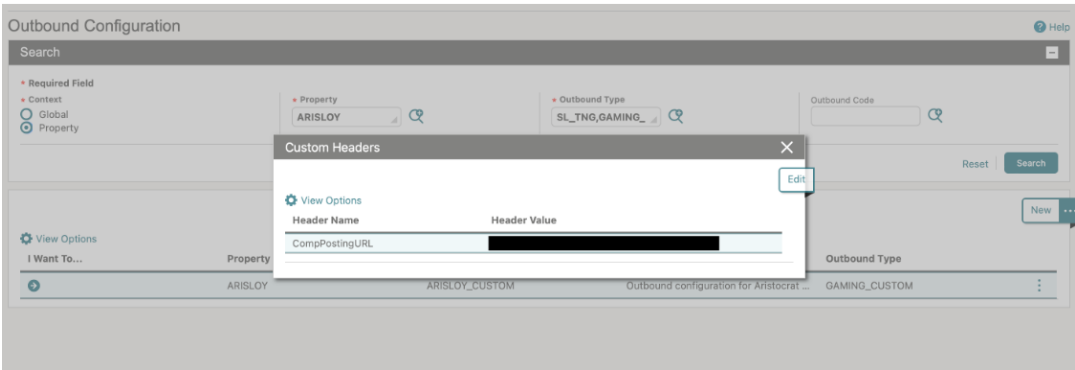


Once the above fields are completed, save the outbound configuration and proceed to [Data Value Mappings \(DVM\)](#).

DVMs for Aristocrat Loyalty

The following Data Value Mappings (DVMs) must be set up for the Aristocrat Loyalty system. DVM configurations are required to convert the categorical values from OPERA Cloud to Loyalty (and vice-versa). For details on how to create DVMs within OPERA Cloud, see [Data Value Mappings](#) in the OPERA Cloud Services documentation.

Configure the DVMs for this outbound configuration. Click the **I Want To...** and select **Data Value Mapping**.

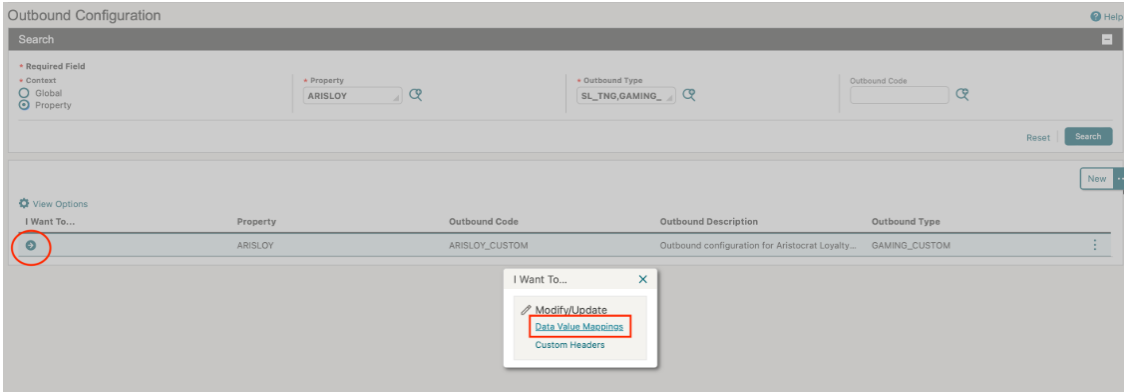

The below DVM values are for reference only and can vary by property.

Country Codes

This DVM will convert the Country Code used in OPERA Cloud with the Country Code used in Loyalty for both messages being sent and received from/to OPERA Cloud.

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

**Note:**

This list follows the ISO 3166.

- **OPERA Cloud Code:** This is the Country Code used in OPERA Cloud.
- **External Value:** This is the Country Code in Loyalty that corresponds to the OPERA Cloud Country Code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-24 Country Codes





















OPERA Cloud Value	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
AW	ABW		
CA	CAN		
GB	GBR		
IN	IND		

Table 6-24 (Cont.) Country Codes

OPERA Cloud Value	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
JP	JPN		
NL	NLD		
PH	PHL		
PT	PRT		
SA	SAU		
US	USA		







Membership Level

This DVM will convert the Membership Levels codes in OPERA Cloud into the Loyalty Ranking Levels codes (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Membership Level code that you previously created.
- **External Value:** This is the Ranking Code in Loyalty that corresponds to the OPERA Cloud Membership Level code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-25 Membership Level

OPERA Cloud Code	External Value	External > OPERA Cloud	OPERA Cloud > External
BRONZE	1		
DIAMOND	2		
PLATINUM	3		



Membership Type

This DVM will convert the Membership Type used in OPERA Cloud to the Membership type used within Loyalty (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Membership Type code that you previously created.
- **External Value:** This is the Aristocrat Loyalty membership type that corresponds to the OPERA Cloud Membership Type.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-26 Membership Type

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
PTS	GC		

Address Type

This DVM will convert the Address Type used in OPERA Cloud with the Address Type used in Aristocrat Loyalty (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Address Type that exists in OPERA Cloud.
- **External Value:** This is the Address Type in Aristocrat Loyalty that corresponds to the OPERA Cloud Address Type code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-27 Address Type









OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
HOME	Resi		
BUSINESS	Mail		

Table 6-27 (Cont.) Address Type

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
MAILING	Mailing		
OTHER	Altn		

Phone Type

This DVM converts the Phone Type used in OPERA Cloud with the Phone Type used in Aristocrat Loyalty (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Phone Type that exists in OPERA Cloud.
- **External Value:** This is the Phone Type in Aristocrat Loyalty that corresponds to the OPERA Cloud Phone Type code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-28 Phone Type









OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External Cloud
HOME	Primary		

Table 6-28 (Cont.) Phone Type

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External Cloud
MOBILE	Mobile		
EMAIL	EMAIL		
BUSINESS	Work		







Gender

This DVM converts the Gender Code used in OPERA Cloud with the Gender Code used in Aristocrat Loyalty (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the Gender Code that exists in OPERA Cloud.
- **External Value:** This is the Gender Code in Aristocrat Loyalty that corresponds to the OPERA Cloud Gender code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-29 Gender

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External Cloud
F	FEMALE		
M	MALE		
U	UNKNOWN		

State Codes

This DVM will convert the State Code used in OPERA Cloud with the State Code used in Aristocrat Loyalty (and vice-versa).

The values in the table below are just for illustration purposes. To complete this DVM, you need the following:

- **OPERA Cloud Code:** This is the State Code that exists in OPERA Cloud.
- **External Value:** This is the State Code in Aristocrat Loyalty that corresponds to the OPERA Cloud State Code.
- **External > OPERA Cloud:** Select this option to translate these values for messages received in OPERA Cloud.
- **OPERA Cloud > External:** Select this option to translate these values for messages being sent by OPERA Cloud.

Table 6-30 States Codes













OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
AB	AB		
BC	BC		
MB	MB		
NB	NB		
NL	NL		
NS	NS		

Table 6-30 (Cont.) States Codes












OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
NT	NT		
NU	NU		
ON	ON		
PE	PE		
QC	QC		
SK	SK		

Table 6-30 (Cont.) States Codes













OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
YT	YT		
AK	AK		
AL	AL		
AR	AR		
AZ	AZ		
CA	CA		

Table 6-30 (Cont.) States Codes

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
CO	CO		
CT	CT		
DC	DC		
DE	DE		
FL	FL		
GA	GA		

Table 6-30 (Cont.) States Codes

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
HI	HI		
IA	IA		
ID	ID		
IL	IL		
IN	IN		
KS	KS		

Table 6-30 (Cont.) States Codes

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
KY	KY		
LA	LA		
MA	MA		
MD	MD		
ME	ME		
MI	MI		

Table 6-30 (Cont.) States Codes

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
MN	MN		
MO	MO		
MS	MS		
MT	MT		
NC	NC		
ND	ND		

Table 6-30 (Cont.) States Codes

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
NE	NE		
NH	NH		
NJ	NJ		
NM	NM		
NV	NV		
NY	NY		

Table 6-30 (Cont.) States Codes

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
OH	OH		
OK	OK		
OR	OR		
PA	PA		
RI	RI		
SC	SC		

Table 6-30 (Cont.) States Codes

















OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
SD	SD		
TN	TN		
TX	TX		
UT	UT		
VA	VA		
VT	VT		

Table 6-30 (Cont.) States Codes

OPERA Cloud Code	External Value (aka Loyalty)	External > OPERA Cloud	OPERA Cloud > External
WA	WA		
WI	WI		
WV	WV		
WY	WY		

Business Events

In the context of Gaming Integration with Aristocrat Loyalty, business events are used to send both profile updates and reservation notifications to Aristocrat Loyalty from OPERA Cloud.

Please configure the below business events in OPERA Cloud in order to have these operations working. For details on configuring business events, refer to [Configuring Business Events](#) in the OPERA Cloud services documentation.

Profiles

Use the below details to create business events for OPERA Cloud Profiles.

- **Property:** Select your OPERA Cloud property.
- **External System:** Select the external system with the same name as the Outbound Configuration you previously created.
- **Module:** Select PROFILE.
- **Business Event:** Select UPDATE PROFILE.

- **Data Elements:** Select all available data elements.
- **Conditions:**
 - MEMBERSHIP NUMBER IS NOT NULL
 - MEMBERSHIP TYPE = 'PTS'
 - Ensure these conditions are used as 'AND' (do not use 'OR')

The screenshot shows the 'Business Events Configuration' window. At the top, there are tabs for 'Property' (ARISLOY), 'External System' (ARISLOY_CUSTOM), 'Module' (PROFILE), 'Database Code' (ARISLOY_CUSTOM), and 'Business Event' (UPDATE PROFILE). Below these is the 'Data Elements' section, which is divided into 'Available' and 'Selected' areas. The 'Available' area is empty with the text 'No values are available to select'. The 'Selected' area contains a table with the following data:

Code	Description
A/R NUMB..	A/R NUMBER
ACCESS C..	ACCESS CHANNEL
ACCESS C..	ACCESS CHANNEL CODE
ACCESS C..	ACCESS CODE
ACCESS I..	ACCESS INACTIVE DATE
ACCESS R..	ACCESS RATE CODE
ACCESS R..	ACCESS RESORTS
ACCESS U..	ACCESS UPDATE DATE
ACCOUNT..	ACCOUNT SOURCE
ACCOUNT..	ACCOUNT TYPE

Below the 'Data Elements' section is the 'Conditions' section. It contains a list of conditions: 'MEMBERSHIP TYPE = 'PTS'' and 'AND MEMBERSHIP NUMBER IS NOT NULL'. Below this is a 'Filter Conditions' section with the text 'MEMBERSHIP TYPE = 'PTS' AND MEMBERSHIP NUMBER IS NOT NULL'. At the bottom right, there are 'Cancel' and 'Save' buttons.

The screenshot shows the 'Business Event Configuration' window with the 'Search' section selected. It contains a 'Required Field' section with the following fields: 'Property' (ARISLOY), 'External System' (ARISLOY_CUST), 'Module' (PROFILE), and 'Database Code' (ARISLOY_CUSTOM). There are 'Reset' and 'Search' buttons. Below the search fields is a 'View Options' section with a 'Business Event' dropdown menu showing 'UPDATE PROFILE'. At the bottom right, there is a 'New' button.

Reservations

Use the below details to create business events for OPERA Reservations.

- **Property:** Select your OPERA Cloud property.
- **External System:** Select the external system with the same name as the Outbound Configuration you previously created.
- **Module:** Select RESERVATION.
- **Business Event:** Select NEW RESERVATION.
- **Data Elements:** Select all available data elements.
- **Conditions:**
 - MEMBERSHIP NUMBER IS NOT NULL
 - MEMBERSHIP TYPE = 'PTS'
 - Ensure these conditions are used as 'AND' (do not use 'OR')

Business Events Configuration

Property: ARISLOY External System: ARISLOY_CUSTOM Module: RESERVATION Database Code: ARISLOY_CUSTOM Business Event: NEW RESERVATION

Data Elements

Available: No values are available to select

Selected:

Code	Description
ACCOMPA...	ACCOMPANYING GUEST
ACCOMPA...	ACCOMPANYING GUEST ADDRESS1
ACCOMPA...	ACCOMPANYING GUEST ADDRESS2
ACCOMPA...	ACCOMPANYING GUEST ADDRESS3
ACCOMPA...	ACCOMPANYING GUEST ADDRESS4
ACCOMPA...	ACCOMPANYING GUEST BIRTH DATE
ACCOMPA...	ACCOMPANYING GUEST CITY
ACCOMPA...	ACCOMPANYING GUEST COUNTRY
ACCOMPA...	ACCOMPANYING GUEST EMAIL
ACCOMPA...	ACCOMPANYING GUEST FIRST

Conditions

Conditions: MEMBERSHIP NUMBER IS NOT NULL AND MEMBERSHIP TYPE = 'PTS'

Filter Conditions: MEMBERSHIP NUMBER IS NOT NULL AND MEMBERSHIP TYPE = 'PTS'

Cancel Save

Repeat the above steps to create business events for the following Reservation Modules:

- ADVANCE CHECK IN
- CANCEL
- CHECK IN
- CHECK OUT
- NEW RESERVATION
- NO SHOW
- REVERSE CHECK IN
- REVERSE CHECK OUT
- ROLLBACK CANCEL
- UPDATE RESERVATION

Business Event Configuration

Search: Check List

Required Field: Property: ARISLOY External System: ARISLOY_CUSTOM Module: RESERVATION Database Code: ARISLOY_CUSTOM

Reset Search

New

View Options

Business Event

ADVANCE CHECK IN	...
CANCEL	...
CHECK IN	...
CHECK OUT	...
NEW RESERVATION	...
NO SHOW	...
REVERSE CHECK IN	...
REVERSE CHECK OUT	...
ROLLBACK CANCEL	...
UPDATE RESERVATION	...

Membership Number automatically assigned to Reservations

To receive updates for a New/Updated reservation, the Membership number of the profile must be attached to the reservation.

To automatically update the Membership number on the new/updated reservations, follow the below steps for configuration:

1. From the **Administration** menu, select **Client Relations**, **Membership Management**, and then **Membership Types**.
2. Search for **Membership Type** as 'PTS' and click **Search**.
3. Select the membership type and click the vertical ellipse **Actions** menu and select **Edit**.
4. Click **Membership Handling**.
5. Click **Edit** and complete the following:
6. Select the Membership Action as **Auto Attach** for attaching memberships to a reservation:
7. Next select the lifecycle of the reservation when you want the membership action to be taken:
 - a. **New Reservation:** Select if the Membership Action should be taken when the reservation is created.
 - b. **Update Reservation:** Select if the Membership Action should be taken when an existing reservation is accessed.

The screenshot shows the 'Manage Membership Type' interface for a membership type named 'PTS'. The 'Membership Handling' tab is active, displaying various configuration options. The 'Membership Action' is set to 'Auto Attach'. The 'New Reservation' and 'Update Reservation' checkboxes are checked, indicating the membership action should be taken when a new reservation is created or an existing reservation is accessed. Other options like 'Check In', 'Check Out', 'Exclude Profile From Purge', 'Enrollment Code Required', 'Externally Controlled', 'Name Protected', 'Alternate Name Protected', and 'Auto Populate Number From Name' are also visible.

8. Click **Save**.