

Oracle Hospitality OPERA Cloud Identity Management

Administrator Guide for Configuring Microsoft Azure AD Synchronization with OPERA Cloud Identity Management



Release 24.1

F97445-02

July 2024

The Oracle logo, consisting of a solid red square with the word "ORACLE" in white, uppercase, sans-serif font centered within it.

ORACLE®

Oracle Hospitality OPERA Cloud Identity Management Administrator Guide for Configuring Microsoft Azure AD Synchronization with OPERA Cloud Identity Management, Release 24.1

F97445-02

Copyright © 2023, Oracle and/or its affiliates.

Contents

1	Microsoft Azure AD Synchronization Overview	
	Prerequisites for Microsoft Azure AD Synchronization	1-1
2	Configuring Microsoft Azure AD Synchronization in OCI IAM Identity Domain	
	1. Create a Confidential Application	2-1
	2. Find the Domain URL and Generate a Secret Token	2-3
	3. Create the OCI Application on Azure AD	2-4
	4. Additional Configurations for Federated Users	2-6
	5. Assign Users and Groups to the Microsoft Azure AD Application	2-15
	Note	2-17

Notices

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Preface

Purpose

This guide explains the Microsoft Azure Active Directory (AD) Synchronization feature of Oracle Hospitality OPERA Cloud. Customers who are using Microsoft Azure AD as their identity provider can utilize the Microsoft Azure AD Synchronization feature.

Audience

This document is intended for OPERA Cloud Services application administrators.

Customer Support

To contact Oracle Customer Support, access the Customer Support Portal at the following URL:

<https://iccp.custhelp.com>

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Documentation

Oracle Hospitality product documentation is available on the Oracle Help Center at

<http://docs.oracle.com/en/industries/hospitality/>

Revision History

Table Revision History

Date	Description of Change
July 2024	Initial Publication

1

Microsoft Azure AD Synchronization Overview

OPERA Cloud Identity Management's OCI IAM Identity Domains provide the capability of synchronizing users and groups from Microsoft Azure Active Directory (Azure AD). This feature ensures customers who are using Microsoft Azure AD as their identity provider can centrally manage their users and groups in Microsoft Azure AD, and those users, groups, and user group memberships are seamlessly synchronized into OPERA Cloud Identity Management.

Prerequisites for Microsoft Azure AD Synchronization

- An operational Microsoft Azure AD tenant
- A user account in Microsoft Azure AD with permission to configure provisioning (for example, Application Administrator, Cloud Application Administrator, Application Owner, or Global Administrator).
- OPERA Cloud Identity Management's OCI IAM Identity Domains provisioned for the customer.
- User account in OCI IAM Identity Domain with Administrator permissions.

2

Configuring Microsoft Azure AD Synchronization in OCI IAM Identity Domain


This section provides the steps to configure Microsoft Azure AD as the authoritative identity store to manage identities in OPERA Cloud Identity Management. Microsoft Azure AD is configured using an application template from Microsoft Azure AD Gallery.

Below are the high-level steps involved in this configuration.


1. Configure OCI IAM so that Microsoft Azure AD is the identity store to manage identities in OCI IAM. In OCI IAM, create a confidential application.
2. Generate a secret token from the OCI IAM identity domain's client ID and client secret. Use this along with the domain URL in Azure AD.
3. Create an app in Microsoft Azure AD and use the secret token and identity domain URL to specify the OCI IAM identity domain and prove that it works by pushing users from Microsoft Azure AD to OCI IAM.
4. Assign the users and groups you want to provision to OCI IAM in the Microsoft Azure AD application.

1. Create a Confidential Application

1. In the OCI Identity Domain, open the navigation menu and click **Identity & Security**.
2. Under Identity, click **Domains**.
3. Click **Integrated Applications** in the identity domain in which you are working
4. Click **Add Application** and choose **Confidential Application** and click **Launch workflow**.

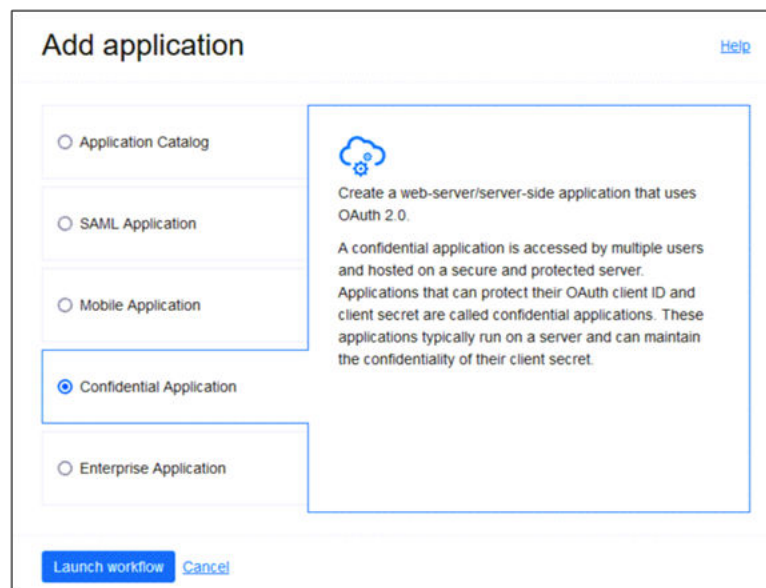


5. Enter a name for the application, for example Azure AD, and click **Next**.
6. Under Client configuration, select **Configure this application as a client now**.

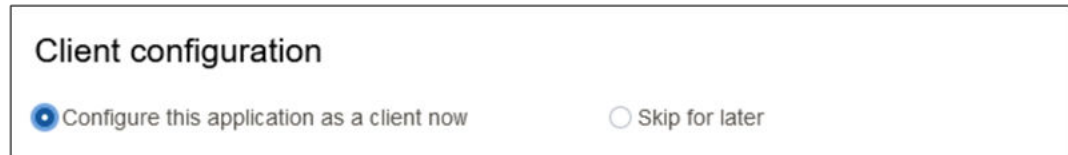

Client configuration

Configure this application as a client now Skip for later

7. Under Authorization, select **Client credentials**.




Authorization

Allowed grant types ⓘ

<input type="checkbox"/> Resource owner	<input type="checkbox"/> Authorization code
<input checked="" type="checkbox"/> Client credentials	<input type="checkbox"/> Implicit
<input type="checkbox"/> JWT assertion	<input type="checkbox"/> SAML2 assertion
<input type="checkbox"/> Refresh token	<input type="checkbox"/> TLS client authentication
<input type="checkbox"/> Device code	

8. Under Client type, select **Confidential**.
9. Scroll down and in the Token issuance policy section, set Authorized resources to **Specific**.

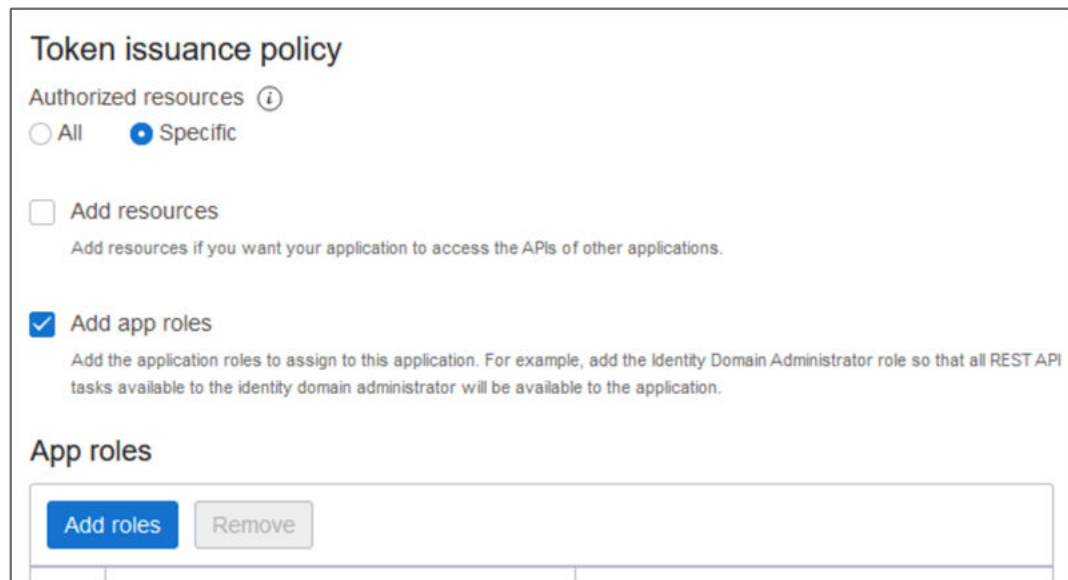

Token issuance policy

Authorized resources ⓘ

All Specific

Add resources
Add resources if you want your application to access the APIs of other applications.

Add app roles
Add the application roles to assign to this application. For example, add the Identity Domain Administrator role so that all REST API tasks available to the identity domain administrator will be available to the application.


App roles

10. Select **Add app roles**.
11. In the App roles section, click the **Add roles** button.
12. On the Add app roles page, select **User Administrator** and then click **Add**.
13. Click **Next** and then click **Finish**.
14. On the Application Overview page, click **Activate** and confirm that you want to activate the application. The confidential application is now activated.


2. Find the Domain URL and Generate a Secret Token

You need the following pieces of information for the connection settings of the enterprise app you create:

- The domain URL
 - A secret token generated from the client ID and client secret
1. Return to the identity domain overview by clicking the identity domain name in the breadcrumbs. Click Copy next to the Domain URL in Domain information and save the URL to an app where you can edit it.

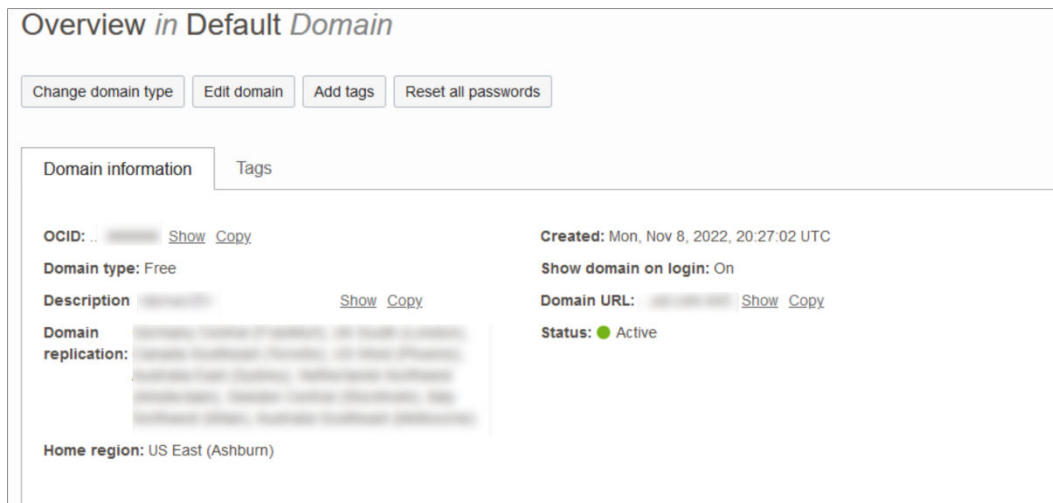

2. In the confidential app in OCI IAM, click the **OAuth** configuration under Resources.
3. Scroll down and find the **Client ID** and **Client secret** under General Information.
4. Copy the **client ID** and store it.
5. Click **Show secret** and copy the secret and store it.

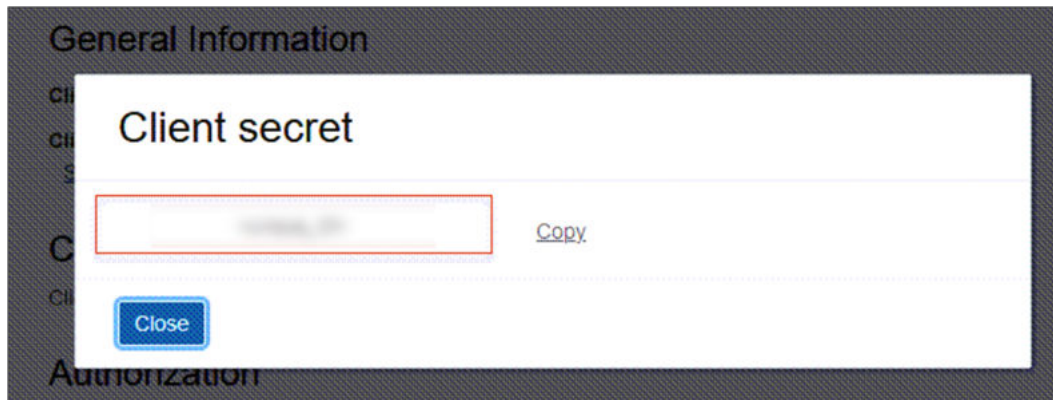

The secret token is the base64 encoding of <clientID>:<clientsecret> or base64(<clientID>:<clientsecret>)

The following examples show how to generate the secret token on Windows and MacOS:

- In a Windows environment, open CMD and use this powershell command to generate base64:

```
[Convert]::ToBase64String([System.Text.Encoding]::UTF8.GetBytes('client_id:secret'))
```

- In MacOS, use the following:

```
echo -n <clientID>:<clientsecret> | base64
```

The secret token is returned. For example:

```
echo -n 392357752347523923457437:3454-9853-7843-3554 | base64
```


```
Nk0NzUyMzcyMzQ1NzMTc0NzUyMzMtNTQzNC05ODc4LTUzNQ==
```

Make a note of the secret token value.


3. Create the OCI Application on Azure AD

Configure Microsoft Azure AD to enable Azure AD to be the authoritative identity store to manage identities in IAM.


1. In the browser, sign into Microsoft Azure using the URL <https://portal.azure.com>
2. Click **Azure Active Directory** to open the Azure Active Directory overview page.
3. In the left menu, click **Enterprise applications**.

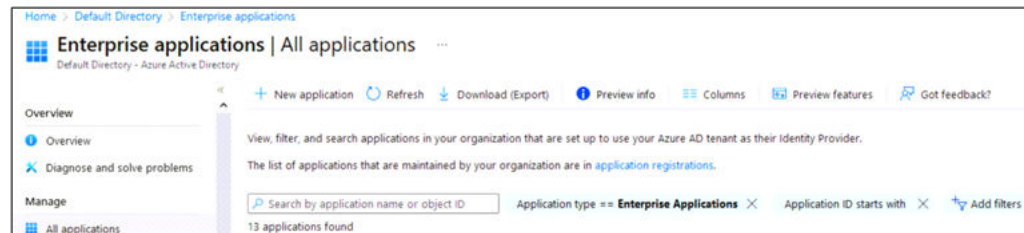


4. On the Enterprise applications page, click **New application**.
5. Select **Oracle Cloud Infrastructure Console**.

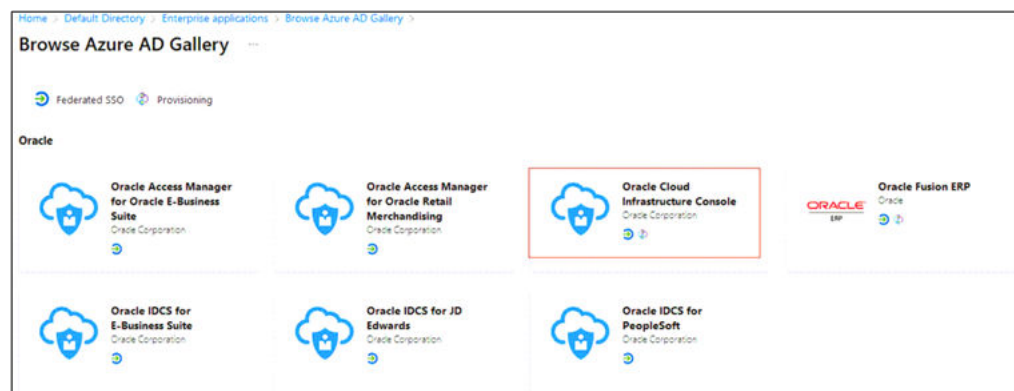

6. Enter a name or accept the default of Oracle Cloud Infrastructure Console.
7. Click **Create**.

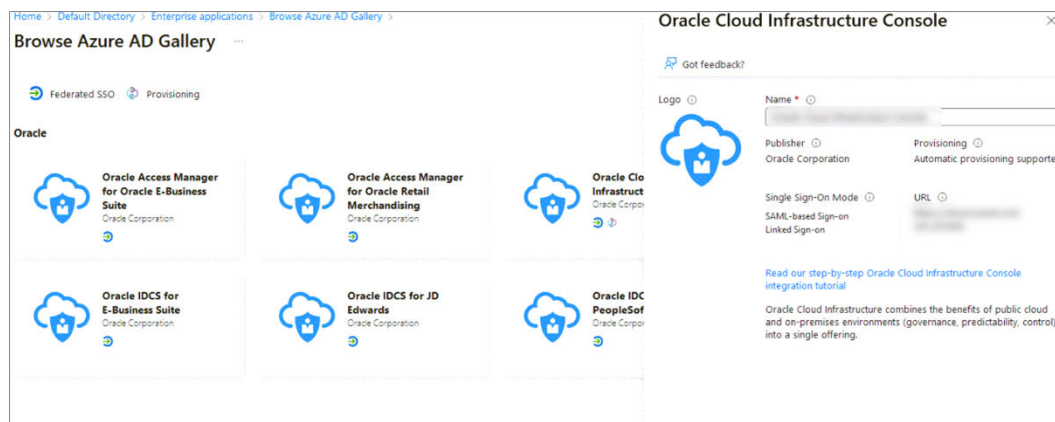

8. Select **Provisioning** from the left menu under Manage.

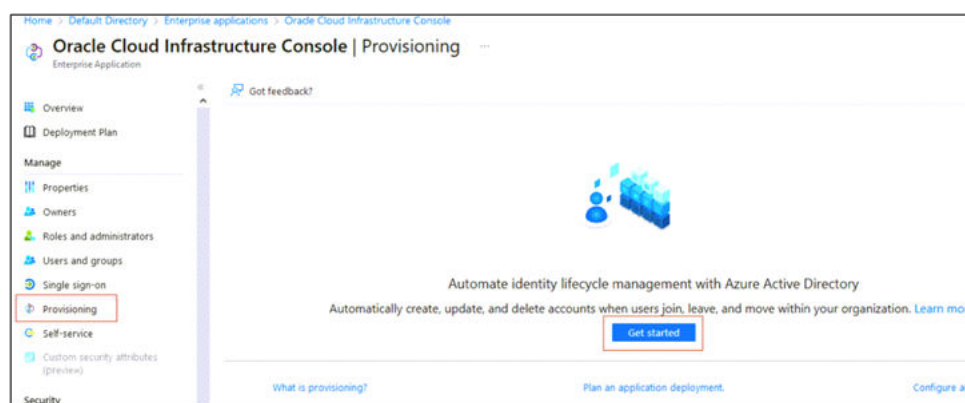

9. Click **Get started** and change the Provisioning Mode to **Automatic**.
10. In the **Tenant URL**, enter the **OCI IAM Domain URL** from 2. [Find the Domain URL and Generate a Secret Token](#) followed by **/admin/v1**. That is, the tenant URL is `https://<domainURL>/admin/v1`
11. Enter the secret token you generated in 2. [Find the Domain URL and Generate a Secret Token](#).

The screenshot shows the 'Provisioning' configuration page for the Oracle Cloud Infrastructure Console. The breadcrumb trail is 'Home > Default Directory > Enterprise applications > Oracle Cloud Infrastructure Console > Provisioning'. At the top, there are 'Save' and 'Discard' buttons. A message states: 'This provisioning connector is in preview. Please click here to provide us feedback.' The 'Provisioning Mode' dropdown menu is set to 'Automatic'. Below this, a note reads: 'Use Azure AD to manage the creation and synchronization of user accounts in Oracle Cloud Infrastructure Console based on user and group assignment.' The 'Admin Credentials' section is expanded, showing instructions: 'Admin Credentials: Azure AD needs the following information to connect to Oracle Cloud Infrastructure Console's API and synchronize user data.' The 'Tenant URL' field is filled with a redacted value and has a green checkmark. The 'Secret Token' field is also redacted. A 'Test Connection' button is located at the bottom of the form.

12. Click **Test Connection** and verify if the test is successful.

4. Additional Configurations for Federated Users

1. In the browser, log in to Microsoft Azure using the URL.
2. Click **Azure Active Directory** to open the Azure Active Directory overview page.
3. In the left menu, click **Enterprise applications**.
4. Click the application you created earlier, Oracle Cloud Infrastructure Console.
5. In the left menu under Manage, click **Provisioning** and then click **Edit Provisioning**.
6. In the Provisioning page, click **Mappings**.
7. Under Mappings, click **Provision Azure Active Directory Users**.

Provisioning Mode

Automatic

Use Azure AD to manage the creation and synchronization of user accounts in OCI IAM - SHCorp based on user and group assignment.

Admin Credentials

Mappings

Mappings allow you to define how data should flow between Azure Active Directory and OracleIDCS.

Name	Enabled
Provision Azure Active Directory Groups	Yes
Provision Azure Active Directory Users	Yes

Restore default mappings

- Under Attribute Mappings, scroll down and click **Add New Mapping**.

Note:

- In Azure User mapping, keep only the mappings shown in the below table and remove all other mappings.
- If the target attribute is not found in the User Mapping in Azure, refer to the 'Custom Attribute Mapping' section to add the target attribute.

Table 2-1 User Mappings

Azure AD User Attribute Name	OCI IAM Domain User Attribute Name	IAM Domain Attribute Type	Mapping Type	Value	Description	Mandatory Attribute
userPrincipalName	userName	String	Direct	N/A	User name	Yes
surname	name.familyName	String	Direct	N/A	Last name	Yes
mail	emails[type eq "work"].value	String	Direct	N/A	Email address	Yes

Table 2-1 (Cont.) User Mappings

Azure AD User Attribute Name	OCI IAM Domain User Attribute Name	IAM Domain Attribute Type	Mapping Type	Value	Description	Mandatory Attribute
extensionAttributePrimaryWorkLocation	urn:ietf:params:scim:schemas:idcs:extension:User:OC_PrimaryWorkLocation	String	Direct	N/A	Mandatory Single Valued User Attribute. Indicates the User's primary work location. Primary Work Location can have values <ENTERPRISE_ID>:E for multi chain customers derived from the User profile. For customers having only a single chain, the source value can be set to constant <CHAINCODE>:C for all users.	Yes
CBool("true")	urn:ietf:params:scim:schemas:oracle:idcs:extension:user:User:isFederatedUsers	Boolean	Expression	CBool("true")	Enable Federated User flag in Identity Domain.	Yes

Table 2-1 (Cont.) User Mappings

Azure AD User Attribute Name	OCI IAM Domain User Attribute Name	IAM Domain Attribute Type	Mapping Type	Value	Description	Mandatory Attribute
CBool("true")	urn:ietf:params:scim:schemas:oracle:idcs:extension:user:User:bypassNotification	Boolean	Expression	CBool("true")	The bypass notification flag controls whether an email notification is sent after creating or updating a user account in Identity Domain. by passNotification to be set to "true" for Federated users and this disables user account activation notification in IAM Identity Domain for the user.	Yes
active	active	String	Expression	Not([IsSoft Deleted])	User status. The attribute IsSoftDeleted is often part of the default mappings for an application in Azure AD. It is not recommended to remove the IsSoftDeleted attribute from your attribute mappings.	Yes
givenName	name.givenName	String	Direct	N/A	First name	No

Table 2-1 (Cont.) User Mappings

Azure AD User Attribute Name	OCI IAM Domain User Attribute Name	IAM Domain Attribute Type	Mapping Type	Value	Description	Mandatory Attribute
preferredLanguage	preferredLanguage	String	Direct	N/A	User's preferred written or spoken language used for localized user interfaces.	No
displayName	displayName	String	Direct	N/A	Display name	No
jobTitle	title	String	Direct	N/A	Title	No
mobile	phoneNumbers[type eq "mobile"].value	String	Direct	N/A	User's mobile phone number	No
extensionAttributeUserOwnerCode	urn:ietf:params:scim:schemas:oc:extension:custom:User:OC_UserOwnerCode	String	Direct	N/A	Unique code (typically, the sales manager's initials) for the owner. For example, oc_ownercode=First_Last_Initial.	No
employeeId	urn:ietf:params:scim:schemas:oc:extension:custom:User:OC_UserEmployeeNo	String	Direct	N/A	Numeric or alphanumeric identifier assigned to a person, typically based on order of hire or association with an organization.	No

Table 2-1 (Cont.) User Mappings

Azure AD User Attribute Name	OCI IAM Domain User Attribute Name	IAM Domain Attribute Type	Mapping Type	Value	Description	Mandatory Attribute
employeeType	urn:ietf:params:scim:schemas:idcs:extension:custom:User:OC_UserType	String	Direct	Possible Values: <ul style="list-style-type: none"> FULL-TIME EMPLOYEE PART-TIME EMPLOYEE TRAINEE CONTRACTOR CONSULTANT OTHER 	Used to identify the organization-to-user relationship.	No
department	urn:ietf:params:scim:schemas:idcs:extension:custom:User:OC_Department	String	Direct	N/A	Specifies the user's department	No
telephoneNumber	phoneNumbers[type eq "work"].value	String	Direct	N/A	User's work phone number	No
extensionAttributeHonorificPrefix	name.honorificPrefix	String	Direct	N/A	User's Initials	No
extensionAttributeMiddleName	name.middleName	String	Direct	N/A	User's Middle name	No
extensionAttributeHonorificSuffix	name.honorificSuffix	String	Direct	N/A	Suffix	No
extensionAttributeTimezone	urn:ietf:params:scim:schemas:core:2.0:User:timezone	String	Direct	N/A	User's timezone	No

Table 2-1 (Cont.) User Mappings

Azure AD User Attribute Name	OCI IAM Domain User Attribute Name	IAM Domain Attribute Type	Mapping Type	Value	Description	Mandatory Attribute
extensionAttributeLocale	urn:ietf:params:scim:schemas:core:2.0:User:locale	String	Direct	N/A	Used to indicate the user's default location for purposes of localizing items such as currency, date and time format, numerical representations, and so on.	No

Azure Active Directory Attribute	OracleIDCS Attribute	Matching precedence	Remove
Item([Split(UserPrincipalName, '@'), 1])	userName	1	<input type="button" value="Delete"/>
Not([IsSoftDeleted])	active		<input type="button" value="Delete"/>
displayName	displayName		<input type="button" value="Delete"/>
jobTitle	title		<input type="button" value="Delete"/>
mail	emails[type eq "work"].value		<input type="button" value="Delete"/>
preferredLanguage	preferredLanguage		<input type="button" value="Delete"/>
givenName	name.givenName		<input type="button" value="Delete"/>
surname	name.familyName		<input type="button" value="Delete"/>
CBool("true")	urn:ietf:params:scim:schemas:oracle:ids:extension:user:UserbyPassNotification		<input type="button" value="Delete"/>
CBool("true")	urn:ietf:params:scim:schemas:oracle:ids:extension:user:UserIsFederatedUser		<input type="button" value="Delete"/>
employeeid	urn:ietf:params:scim:schemas:ids:extension:custom:User:OC_UserEmployeeNo		<input type="button" value="Delete"/>
extensionAttributeUserOwnerCode	urn:ietf:params:scim:schemas:ids:extension:custom:User:OC_OwnerCode		<input type="button" value="Delete"/>
extensionAttributePrimaryWorkLocation	urn:ietf:params:scim:schemas:ids:extension:custom:User:OC_PrimaryWorkLocation		<input type="button" value="Delete"/>
employeeType	urn:ietf:params:scim:schemas:ids:extension:custom:User:OC_UserType		<input type="button" value="Delete"/>

[Add New Mapping](#)

Custom Attribute Mapping

To add mapping for target attributes, such as custom attributes and attributes not defined by default in the provisioning connector schema, you can edit the JSON representation of the schema to add these attribute mappings.

 **Note:**

Editing the list of supported attributes is only recommended for administrators who have customized the schema of their applications and systems and have first-hand knowledge of how their custom attributes are defined or if a source attribute is not automatically displayed in the Microsoft Entra admin center UI. This sometimes requires familiarity with the APIs and developer tools provided by an application or system. The ability to edit the list of supported attributes is locked down by default, but customers can enable this capability by navigating to the following URL: https://portal.azure.com/?Microsoft_AAD_Connect_Provisioning_forceSchemaEditorEnabled=true.

You can navigate to your application to view the attribute list. For more information, see the "Editing the list of supported attributes" section of the Microsoft article *Tutorial - Customize user provisioning attribute-mappings for SaaS applications in Microsoft Entra ID*.

1. Under Provisioning, select **Mappings**, and then select **Provision Azure Active Directory Users**.
2. Select the **Show advanced options** check box at the bottom of the Attribute Mapping screen, and then select **Edit attribute list for OracleIDCS**.



3. **Save** the mapping.

Group Attribute Mapping

1. On the Provisioning page, click **Mappings**.
2. Under Mappings, click **Provision Azure Active Directory Groups**. Refer to the below table to update and add the mappings for Group attributes.

Table 2-2 Group Attribute Mappings

Azure AD Attribute	IAM Domain Group Attribute Name	IAM Domain Attribute Type	Mapping Type	Value	Description	Mandatory Attribute
displayName	displayName	String	Direct	N/A	Group display name	Yes

Table 2-2 (Cont.) Group Attribute Mappings

Azure AD Attribute	IAM Domain Group Attribute Name	IAM Domain Attribute Type	Mapping Type	Value	Description	Mandatory Attribute
members	members	String	Direct	N/A	Members of the group	No
objectId	externalId	String	Direct	N/A	External Group Id	No
description	urn:ietf:params:scim:schemas:oracle:idcs:extension:group:Group:description	String	Direct	N/A	Group description	No

Group Attribute Mapping in Azure AD

Azure Active Directory Attribute	OracleIDCS Attribute	Matching precedence	Remove
displayName	displayName	1	Delete
members	members		Delete
objectId	externalid		Delete
description	urn:ietf:params:scim:schemas:oracle:idcs:extension:group:Group:description		Delete


Follow the below steps to add the IDCS Group Description attribute.

1. Under Provisioning, select **Mappings** and then select **Provision Azure Active Directory Groups**.
2. Select the **Show advanced options** check box at the bottom of the Attribute Mapping screen and then select **Edit attribute list for OracleIDCS**.

Note:

For this operation, you must set the Azure Portal URL with forceSchemaEditorEnabled=true as mentioned in the Note under the 'Custom Attribute Mapping' section.

3. Add the attribute.
4. Save the mapping.
5. Navigate to **Provision Azure Active Directory Groups** and add the mapping for the Group description and save the changes.
6. Select **Provisioning** from the left menu and set the **Provisioning Status** to "On."

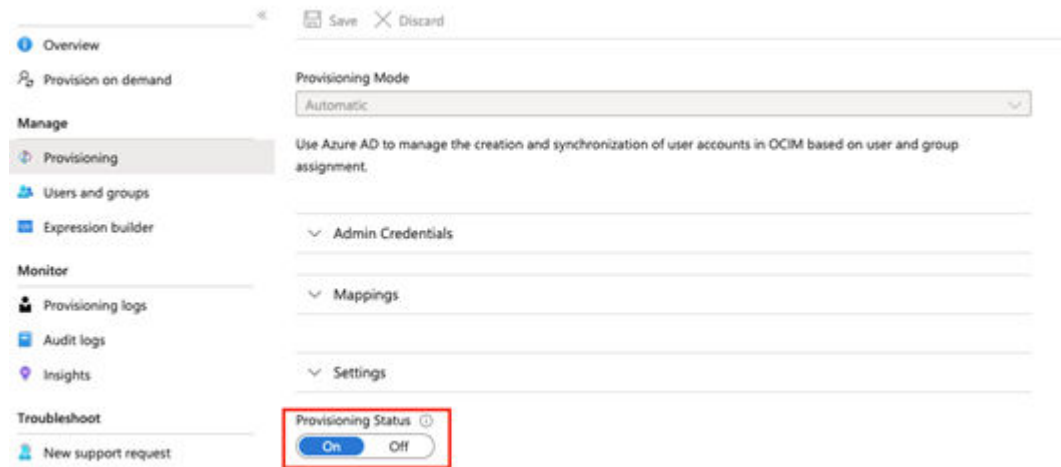


7. Save the changes.


5. Assign Users and Groups to the Microsoft Azure AD Application

Assign the users you want to provision to OCI IAM.


1. In Azure AD, in the left menu, click **Enterprise applications**.
2. Click the application you created earlier, Oracle Cloud Infrastructure Console.
3. In the left menu under Manage, click **Users and groups**.
4. In the Users and groups page, click **Add user/group**.
5. On the Add Assignment page, under Users and groups, click **None Selected**. The Users and groups page opens.
6. Select one or more users or groups from the list by clicking them. The ones you select are listed under Selected items.

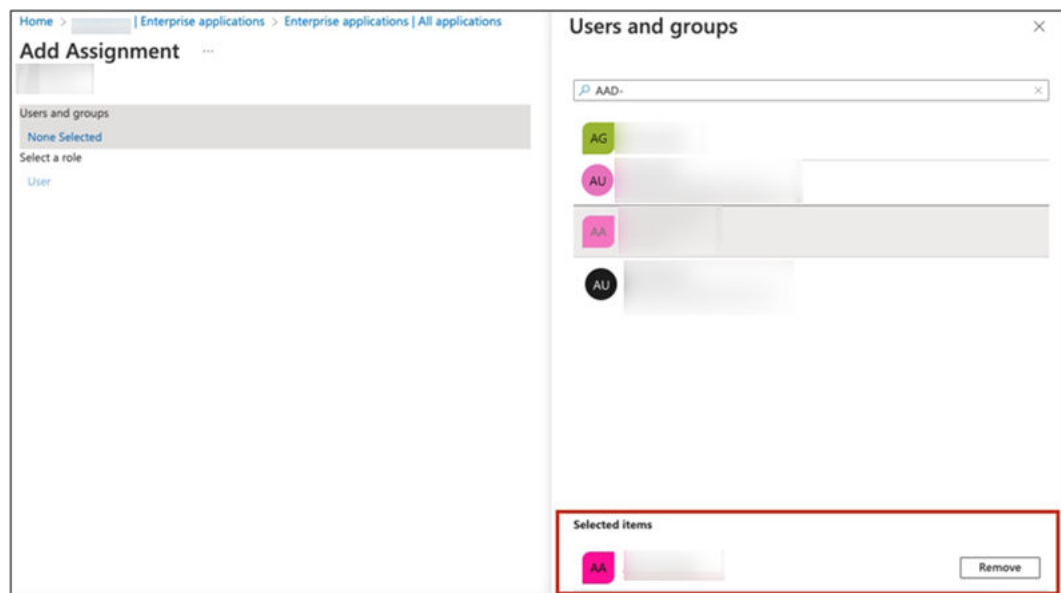


- Click **Select**. The number of users and groups selected are shown on the Add Assignment page.

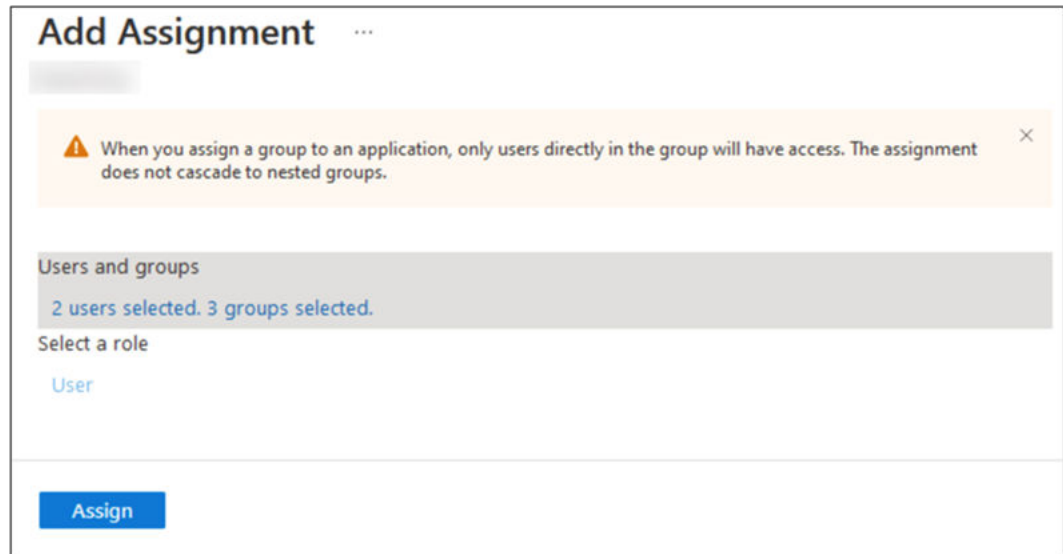


- On the Add Assignment page, click **Assign**. The Users and groups page now shows the users and groups you have chosen.

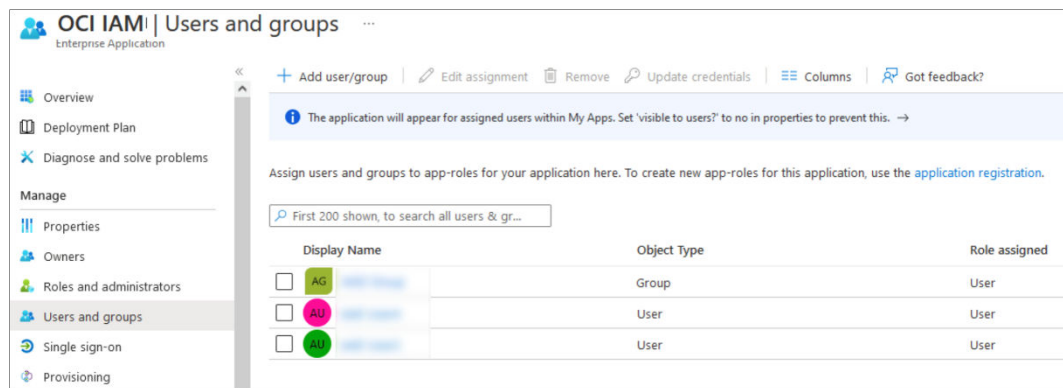

- Click **Provisioning** in the left menu to provision the groups and users. The provisioning log shows the status.

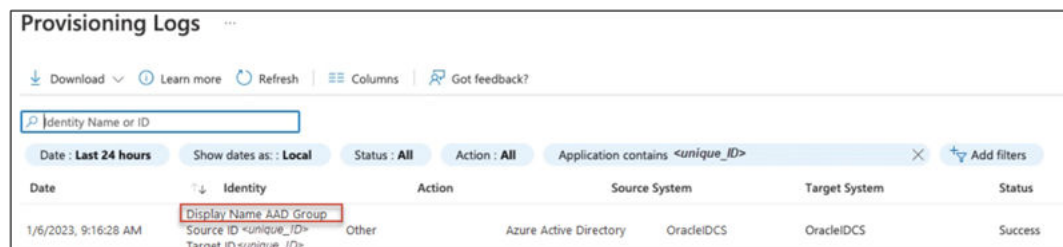

- When provisioning is successful, the **Current cycle status** indicates that the incremental cycle has completed, and the number of users provisioned to OCI IAM appears.

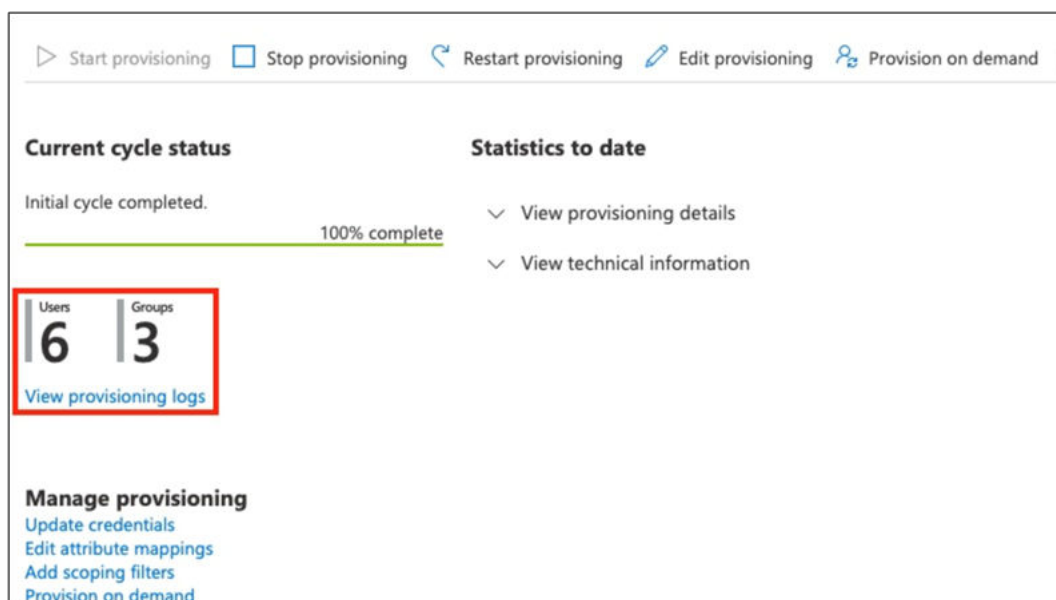


The screenshot shows the OCI IAM provisioning dashboard. At the top, there are several action buttons: Start provisioning, Stop provisioning, Restart provisioning, Edit provisioning, and Provision on demand. Below this, the dashboard is divided into two main sections: Current cycle status and Statistics to date.

Current cycle status
Initial cycle completed. A progress bar indicates 100% complete.

Statistics to date
Users: 6
Groups: 3
View provisioning logs

Manage provisioning
Update credentials
Edit attribute mappings
Add scoping filters
Provision on demand

In OCI IAM, you can now see the users and groups provisioned from Azure AD.

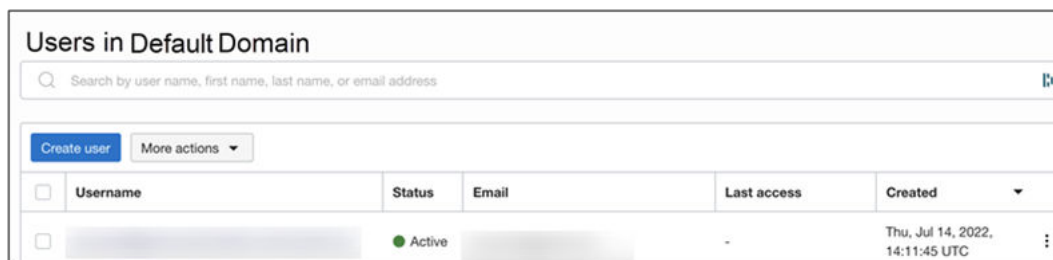

The screenshot shows the 'Users in Default Domain' page. It includes a search bar, a 'Create user' button, and a 'More actions' dropdown. Below is a table with columns for Username, Status, Email, Last access, and Created.

	Username	Status	Email	Last access	Created
<input type="checkbox"/>		Active		-	Thu, Jul 14, 2022, 14:11:45 UTC

Note

OC_PrimaryWorkLocation is a custom attribute in OCI IAM Domain. Due to an issue in Microsoft Azure, this does not get synced from Microsoft Azure to Oracle via the provisioning connector in Microsoft Entra. As a work around, we are having the custom attribute sync carried out by JIT attribute mapping as part of the Federation configuration. This custom attribute is updated in OCI IAM Domain at the time of the user's first login to OPERA Cloud.