Oracle® Hospitality OPERA Cloud Identity Management

Administrator Guide for Setting Up Identity Federation with Just-In-Time Provisioning (JIT) in OCI IAM Identity Domains





Oracle Hospitality OPERA Cloud Identity Management Administrator Guide for Setting Up Identity Federation with Just-In-Time Provisioning (JIT) in OCI IAM Identity Domains, Release 25.2

G33281-01

Copyright $^{\scriptsize \textcircled{\tiny 0}}$ 2024, 2025, Oracle and/or its affiliates.

Contents

Steps to Configure Identity Federation in OCI IAM Identity Domains with Just-In-Time Provisioning

Step 1: Downloading the SAML Metadata in OCI IAM Identity Domain	1-1
Step 2: Adding OCI IAM Identity Domain as a Service Provider (SP) in the Identity Provider	
(IdP)	1-1
Step 3: Downloading the Identity Provider SAML Metadata Document	1-4
Step 4: Adding the Identity Provider in OCI IAM Identity Domains	1-4
Step 5: Configuring Just In Time Provisioning in OPERA Cloud Identity Management Portal	1-5
Step 6: Testing SSO between Identity Provider and OCI IAM	1-6



Notices

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software" or "commercial computer software documentation" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.



Preface

Purpose

This guide explains the steps to configure Identity Federation to set up OPERA Cloud services single sign-on (SSO) with a customer identity provider.

Audience

This document is intended for OPERA Cloud Services application administrators.

Customer Support

To contact Oracle Customer Support, access the Customer Support Portal at the following URL:

https://iccp.custhelp.com

When contacting Customer Support, please provide the following:

- Product version and program/module name
- Functional and technical description of the problem (include business impact)
- Detailed step-by-step instructions to re-create
- Exact error message received
- Screen shots of each step you take

Documentation

Oracle Hospitality product documentation is available on the Oracle Help Center at

http://docs.oracle.com/en/industries/hospitality/

Revision History

Table Revision History

Date	Description of Change
June 2025	Initial Publication



1

Steps to Configure Identity Federation in OCI IAM Identity Domains with Just-In-Time Provisioning

OPERA Cloud Identity Management provides the capability of identity federation by determining which customers can integrate their identity provider with OPERA Cloud to implement single sign-on with OPERA Cloud. Leveraging OPERA Cloud Identity Management's identity federation feature, customers can use their corporate credentials to log on to OPERA Cloud, which eliminates the necessity to separately manage users and their access to OPERA Cloud.

This document explains the steps required to configure identity federation with Just In Time (JIT) user provisioning in a customer's OCI IAM Identity Domains.

Step 1: Downloading the SAML Metadata in OCI IAM Identity Domain

- 1. Log on to Oracle IAM Domain Admin Console.
- 2. Open the navigation menu, select **Security** and then click **Identity providers**.
- 3. Open an identity provider.
- Click Export SAML metadata.
- 5. Select one of the following options:
 - Metadata File: Select download the SAML XML metadata file or select download the SAML XML metadata with self-signed certificates.
 - Manual Export: Manually exporting the metadata enables you to choose from multiple SAML options. For example, the Entity ID or Logout response URL. After you copy the export file, you can download the service provider signing certificate or the service provider encryption certificate.
 - Metadata URL: If your IdP supports downloading SAML metadata directly, click
 Access signing certificate to allow clients to access the signing certificate without the
 need to log on to an IdP.

Step 2: Adding OCI IAM Identity Domain as a Service Provider (SP) in the Identity Provider (IdP)

- 1. Add the OCI IAM Identity Domain as the service provider in your identity using the metadata downloaded earlier.
- 2. Map the Name identifier (Name ID) value field as the username.
- The below table lists the SAML attributes that must be configured in identity provider to pass as assertion during the SAML response.

Table 1-1 SAML Attributes

SAML Attribute Name	Attribute Description	Mandatory Attribute
oc_userid	User Name	Yes
oc_surname	Family Name	Yes
oc_emailaddress	Primary Email	Yes
oc_userid	User Name	Yes
oc_surname	Family Name	Yes
oc_primaryworklocation	User's primary work location. This is a mandatory single value user attribute that indicates the user's primary work location. The primary work location can have the following values: <enterprise id="">:E for multichain customers derived from the user profile for those users who are at the enterprise level.</enterprise>	
	For customers having only a single chain, the source value can be set to constant <chain code="">:C for all users.</chain>	
	Assign <property code="">:P derived from the user profile in the identity provider to assign users with a property code as their primary work location.</property>	
oc_role	Group memberships (role memberships) of the user.	Yes
oc_actas	You can send values for a new user's Act As field from your identity provider, which eliminates overhead for an admin to manually assign Act As for a new user in OPERA Cloud Role Manager.	
	Possible Values: Reservation Sales Person Conference Sales Person External System	
oc_actat	You can send values for a new user's Act At field from your identity provider, which eliminates overhead for an admin to manually assign Act At for a new user in OPERA Cloud Role Manager.	
	Possible Values: • Property • Central	
oc_preferredlanguage	User Preferred Language	No



Table 1-1 (Cont.) SAML Attributes

SAML Attribute Name	Attribute Description	Mandatory Attribute
oc_givenname	Given Name	No
oc_employeenumber	Employee Number	No
oc_telephonenumber	Mobile Number	No
oc_title	Title	No
oc_displayname	Display Name	No
oc_usertype	User Type. The possible values are: FULL-TIME EMPLOYEE PART-TIME EMPLOYEE TRAINEE CONTRACTOR CONSULTANT OTHER	No
oc_orgcode	Enterprise or Chain Code	No
oc_workphonenumber	Work Phone Number	No
oc_userinitial	Honorific Prefix	No
oc_middlename	Middle Name	No
oc_honorificsuffix	Honorific Suffix	No
oc_timezone	User Timezone	No
oc_locale	User Locale	No
oc_ownercode	Owner code of the user	No
oc_hubs	This SAML claim enables customers to map HUB(s) to a user in OPERA Cloud. This claim is mapped to a string array attribute in OCI IAM Identity Domain and allows multiple values. If the identity provider system does not support string array data types, then use the claim oc_hubs_string as described below. If no value is passed, the user is assigned to the default hub in OPERA Cloud.	No
oc_hubs_string	This SAML claim enables customers to map HUB(s) to a user in OPERA Cloud. This claim is mapped to a string attribute in OCI IAM Identity Domain. Please note, only oc_hubs or oc_hubs_string can be used based on the data type supported in the identity provider. If no value is passed, the user is assigned to the default hub in OPERA Cloud.	



Step 3: Downloading the Identity Provider SAML Metadata Document

Download this metadata XML file and make a note of where you save it. You will upload
this document to the IAM Domain Console in the next series of steps.


Step 4: Adding the Identity Provider in OCI IAM Identity Domains

Enter the identity provider details by following these steps:

- Navigate to the Oracle IAM domain console.
- 2. On the navigation menu, click Security and then click Identity providers.
- Click Add IdP and then click Add SAML IdP.
- 4. Enter the following information:
 - Name: Enter the name of the IdP.
 - (Optional) **Description**: Enter a description of the IdP.
 - (Optional) Identity provider icon: Drag and drop a supported image or click select one to browse for the image.
- Click Next.

Verify the **Import identity provider metadata** is selected and browse and select or drag and drop the metadata XML file onto the Identity provider metadata. This is the metadata file you saved earlier from your identity provider.


- 6. Click Next.
- 7. In Map user identity, set the values as shown in the following image.

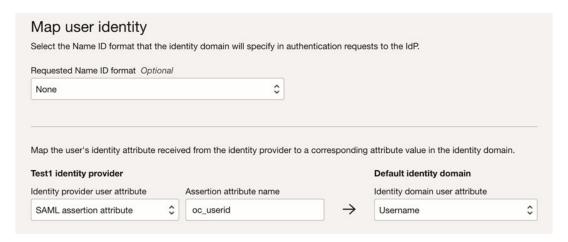

- Click Next.
- 9. Under Review and Create, verify the configurations, and then click Create IdP.
- 10. Click Activate.
- 11. Click Add to IdP Policy Rule.
- Click Default Identity Provider Policy to open it, and from the context (vertical ellipsis) menu, select Edit IdP rule.



- Click Assign identity providers and then click the Identity provider name to add it to the list.
- 14. Click Save Changes.
- 15. Go back to Security and click Sign-on policies.
- 16. Click Default Identity Provider Policy to open it, and in the Sign-on rules from the context (vertical ellipsis) menu on the right, select Edit IdP rule.
- 17. Select the identity provider.

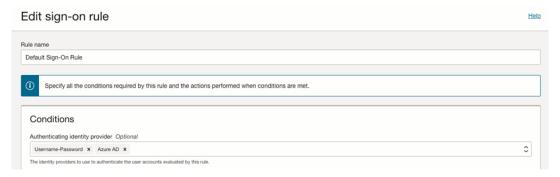

18. Save your changes.

Step 5: Configuring Just In Time Provisioning in OPERA Cloud Identity Management Portal

The Configure Identity Providers tool in OPERA Cloud Identity Management portal configures attribute mappings for Just-in-time (JIT) provisioning in the selected SAML Identity Provider of the respective Oracle Cloud Infrastructure Identity and Access Management (OCI IAM) Identity Domain.

Enterprise administrators have access to this feature in the OPERA Cloud Identity Management portal Tools page. In addition, the customer administrator should also have the Identity Domain Administrator or the Security Administrator Application Roles in Oracle Cloud Infrastructure Identity and Access Management to configure the Identity Provider.

Configure Identity Providers

- 1. Log in to OPERA Cloud Identity Management Portal as an enterprise administrator.
- 2. Click the **Tools** tile on the Homepage.



The Tools page consists of a list of available tools including Configure Identity Providers.

Select Configure Identity Providers.
 All active Identity Providers in the respective OCI IAM Identity Domain are shown.



Note:

User must have the Identity Domain Administrator or Security Administrator role in Oracle Cloud Infrastructure Identity and Access Management to perform this operation. For more information, refer to <u>Understanding Administrator Roles</u> in the Oracle Cloud Infrastructure Documentation.

4. Click the Configure JIT button next to the respective Identity Provider. This enables JIT for the respective Identity Provider and adds all the attribute mappings including the custom attributes needed for provisioning.

Confirm the JIT Mappings are Created

- 1. Go to the OCI console and navigate to the Identity domain in which you want to work and select the **Identity Provider**.
- Click Configure JIT and confirm the JIT is enabled and the attribute mappings have been created.
- 3. Click Save changes.

Note:

Oracle does not recommend that customers make any customization to the JIT configuration from the Oracle Cloud Infrastructure console. Any updates made in the OCI console will not be saved or captured by the Configure Identity Providers tool.

Step 6: Testing SSO between Identity Provider and OCI IAM

In this section, you can test that federated authentication works between OCI IAM and the customer's identity provider.

- Open a supported browser and enter the OCI Console URL: https://cloud.oracle.com.
- 2. Enter your Cloud Account Name, also referred to as your tenancy name, and click Next.
- 3. Select the identity domain in which Identity provider has been configured.
- 4. On the sign-in page, you can see an option to sign in with identity provider.
- 5. Select the identity provider. You are redirected to the Microsoft login page.
- 6. Provide your identity provider user credentials.
- 7. On successful authentication, you are logged in to the OCI Console.

