Oracle Utilities Testing Accelerator for Cloud

Reference Guide for Customer Program Management Cloud Service



Release 26.10
G62499-01
November 2026



Oracle Utilities Testing Accelerator for Cloud Reference Guide for Customer Program Management Cloud Service, Release 26.10

G62499-01

Copyright © 2026, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

Oracle customer access to and use of Oracle support services will be pursuant to the terms and conditions specified in their Oracle order for the applicable services.

Contents

1 Introduction

2 Preface

3 Component Reference

Overview 1
Components 1
- ADK Master Data 2
- Administration Data 3
- Asset Management 17
- Bill Determinants 46
- Communication 49
- Construction Work Management 67
- Customer Information 73
- Customer Program Management Cloud Service 79
- CX REST API 84
- Data Model 96
- Data Synchronization 99
- Extendable Lookup 102
- General 106
- Initial Measurement Data 108
- Integration 109
- Inventory Management 111
- Invoicing 117
- Purchasing 117
- Resource Management 120
- Self Service 121
- Service Order Management 126
- Service Task Type 126
- SMDF Admin Data 129
- SMDF Master Data 137
- Usage 138

Copyright © 2026, Oracle and/or its affiliates.

4 Inbound Web Services

5 Identifying Fields For a Web Service Request

Copyright © 2026, Oracle and/or its affiliates.

1

Introduction

Welcome to the Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Program Management Cloud Service for release 26.10. This document describes the Oracle Utilities Customer Program Management Cloud Service components and function libraries used to create those components in Oracle Utilities Testing Accelerator. These components are used to build test flows in Oracle Utilities Testing Accelerator Workbench.

This guide contains the following:

- Preface
- Component Reference
- Inbound Web Services
- Identifying Fields For a Web Service Request

For information about the other documentation included in this release, please refer to the Oracle Utilities Testing Accelerator for Cloud Services page on Oracle Help Center .

Have a question? Contact your Delivery Team or visit My Oracle Support.

Copyright © 2026, Oracle and/or its affiliates.

2 Preface

The preface includes the following sections:

- Audience
- Related Documents
- Updates to Documentation
- Documentation Accessibility
- Conventions
- Abbreviations

Audience

This guide is intended for QA/Test Engineers and Automation Developers to understand the various components and libraries available for them to automate the business test flows for Oracle Utilities Customer Program Management Cloud Service using Oracle Utilities Testing Accelerator for Oracle Utilities Customer Program Management Cloud Service.

Related Documents

For more information, refer to the following Oracle resources.

- *Oracle Utilities Testing Accelerator User's Guide for Cloud*
- *Oracle Utilities Testing Accelerator Reference Guide for Core*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Billing Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Care and Billing Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Customer Program Management Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Meter Solution Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Rate Cloud Service*
- *Oracle Utilities Testing Accelerator Reference Guide for Oracle Utilities Work and Asset Cloud Service*

Also, see the following documentation libraries on Oracle Help Center:

- Oracle Utilities Customer Program Management Cloud Service
- Oracle Utilities Customer Program Management

Updates to Documentation

Documentation updates are posted on Oracle Help Center as they become available.

Copyright © 2026, Oracle and/or its affiliates.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle's Accessibility Program website.

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. If you are hearing impaired, visit the Oracle Accessibility Learning and Support website for more information.

Conventions

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
`Monospace`	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Abbreviations

Term	Expanded Form
CPCS/OUCPMCS	Oracle Utilities Customer Program Management Cloud Service
OUTA/UTA	Oracle Utilities Testing Accelerator
OUMDM/MDM	Oracle Utilities Meter Data Management
OUC2M/C2M	Oracle Utilities Customer to Meter

Copyright © 2026, Oracle and/or its affiliates.

3
Component Reference

This chapter lists the Oracle Utilities Customer Program Management Cloud Service starter components available to create flows in Oracle Utilities Testing Accelerator Workbench for testing the applications. It includes the following sections:

- Overview
- Components

Overview

Oracle Utilities Testing Accelerator for Oracle Utilities Customer Program Management Cloud Service is a test starter pack built on top of Oracle Utilities Testing Accelerator that generates test automation scripts using Oracle Utilities Testing Accelerator Workbench.

Oracle Utilities Testing Accelerator for Oracle Utilities Customer Program Management Cloud Service contains out-of-the-box product-specific components used to build new test flows in Oracle Utilities Testing Accelerator Workbench to test the Oracle Utilities Customer Program Management Cloud Service application. These out-of-the-box components correspond to specific business entities, such as business objects, service scripts, or business services used for interfacing with the application. Users can use these components as available or can extend them. Users can also create new components to be used to create flows. This starter pack also contains a set of function libraries that can be used for creating custom components.

Consider this pack to be a starter kit which can be expanded and built upon. A few sample flows are included as an example.

For more information about creating components and flows, refer to the *Oracle Utilities Testing Accelerator User's Guide* available on the Oracle Utilities Testing Accelerator for Cloud Services page on Oracle Help Center.

Components

This section lists the starter components available for Oracle Utilities Customer Program Management Cloud Service.

> **Note**
>
> The Inbound Web Service using the respective business object should be available in the application.
>
> Failure while creating, reading, or updating the component is logged in the test execution report, thus facilitating debugging/analysis of the problem.

The components are categorized under the following functional areas:

- ADK Master Data
- Administration Data

Copyright © 2026, Oracle and/or its affiliates.

- Asset Management
- Bill Determinants
- Communication
- Construction Work Management
- Customer Information
- Customer Program Management Cloud Service
- Data Model
- Data Synchronization
- Extendable Lookup
- General
- Initial Measurement Data
- Integration
- Inventory Management
- Invoicing
- Purchasing
- Resource Management
- SMDF Admin Data
- SMDF Master Data
- Usage
- Work Management

ADK Master Data

Component	Description
DG-ConDisconStChgNotification	Used to perform actions such as ADD, READ, UPDATE and DELETE a Connect Disconnect State Change Notification record. This component invokes the DG-ConnectDisconStateChgNtfBusiness Object using the ATDGConnectDisconStateChgNtf Inbound Web Service.
DG-OutageDetectionEventNotification	Used to perform actions such as ADD, READ, UPDATE and DELETE a Outage Detection Event Notification record. This component invokes the DG-OutageDetectEvtNotification Business Object using the ATDGOutageDetectEvtNotification Inbound Web Service.
DG-SmartMeter	Used to perform actions such as ADD, READ, UPDATE and DELETE a SmartMeter record. This component invokes the DG- SmartMeter using the ATDGSmartMeter Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
DG-ReadingChangedNotification	Used to perform actions such as ADD, READ, UPDATE and DELETE a Reading Change Notification record. This component invokes the DG-ReadingChgNotificationBusiness Object using the ATDGReadingChgNotification Inbound Web Service.

Administration Data

Component	Description
W1-AccountingCalendar	Used to create, update, read, or delete AccountingCalendar in the WAM application. This component calls the W1-AccountingCalendar business object using the Inbound Web Service.
W1-StatusReason	Used to create, update, read, or delete StatusReason in the WAM application. This component calls the W1-StatusReason business object using the Inbound Web Service.
W1-PERMITCLS	Used to create, update, read, or delete PERMITCLS in the WAM application. This component calls the W1-PERMITCLS business object using the Inbound Web Service.
W1-NormalizationDeficiency	Used to create, update, read, or delete NormalizationDeficiency in the WAM application. This component calls the W1-NormalizationDeficiency business object using the Inbound Web Service.
W1-MDMIntegrationMasterConfig	Used to create, update, read, or delete MDMIntegrationMasterConfig in the WAM application. This component calls the W1-MDMIntegrationMasterConfig business object using the Inbound Web Service.
F1-EsriMapMasterConfig	Used to create, update, read, or delete EsriMapMasterConfig in the WAM application. This component calls the F1-EsriMapMasterConfig business object using the Inbound Web Service.
F1-EsriWebMap	Used to create, update, read, or delete EsriWebMap in the WAM application. This component calls the F1-EsriWebMap business object using the Inbound Web Service.
W1-CCBIntegrationMasterConfig	Used to create, update, read, or delete CCBIntegrationMasterConfig in the WAM application. This component calls the W1-CCBIntegrationMasterConfig business object using the Inbound Web Service.
W1-ConfigClass	Used to create, update, read, or delete ConfigClass in the WAM application. This component calls the W1-ConfigClass business object using the Inbound Web Service.
W1-DSIIdentifierMap	Used to create, update, read, or delete DSIIdentifierMap in the WAM application. This component calls the W1-DSIIdentifierMap business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-ErasureScheduleContact	Used to create, update, read, or delete ErasureScheduleContact in the WAM application. This component calls the W1-ErasureScheduleContact business object using the Inbound Web Service.
W1-EsriWAMIntegMasterConfig	Used to create, update, read, or delete EsriWAMIntegMasterConfig in the WAM application. This component calls the W1-EsriWAMIntegMasterConfig business object using the Inbound Web Service.
W1-ExternalPermitTemplate	Used to create, update, read, or delete ExternalPermitTemplate in the WAM application. This component calls the W1-ExternalPermitTemplate business object using the Inbound Web Service.
W1-FailureDowntimeSHTCmpEvtTyp	Used to create, update, read, or delete FailureDowntimeSHTCmpEvtTyp in the WAM application. This component calls the W1-FailureDowntimeSHTCmpEvtTyp business object using the Inbound Web Service.
W1-FailureProfFailureRepair	Used to create, update, read, or delete FailureProfFailureRepair in the WAM application. This component calls the W1-FailureProfFailureRepair business object using the Inbound Web Service.
W1-GISProjectedCoordinateSys	Used to create, update, read, or delete GISProjectedCoordinateSys in the WAM application. This component calls the W1-GISProjectedCoordinateSys business object using the Inbound Web Service.
W1-GISToWAMSyncMapping	Used to create, update, read, or delete GISToWAMSyncMapping in the WAM application. This component calls the W1-GISToWAMSyncMapping business object using the Inbound Web Service.
W1-GaugeRdWtThresholdMsrType	Used to create, update, read, or delete GaugeRdWtThresholdMsrType in the WAM application. This component calls the W1-GaugeRdWtThresholdMsrType business object using the Inbound Web Service.
W1-GaugeReadRange	Used to create, update, read, or delete GaugeReadRange in the WAM application. This component calls the W1-GaugeReadRange business object using the Inbound Web Service.
W1-HomepageMasterConfig	Used to create, update, read, or delete HomepageMasterConfig in the WAM application. This component calls the W1-HomepageMasterConfig business object using the Inbound Web Service.
W1-InspectionTypeGenrlWeighted	Used to create, update, read, or delete InspectionTypeGenrlWeighted in the WAM application. This component calls the W1-InspectionTypeGenrlWeighted business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-InternalPermitTemplate	Used to create, update, read, or delete InternalPermitTemplate in the WAM application. This component calls the W1-InternalPermitTemplate business object using the Inbound Web Service.
W1-InventoryLocationType	Used to create, update, read, or delete InventoryLocationType in the WAM application. This component calls the W1-InventoryLocationType business object using the Inbound Web Service.
W1-MeterRdWithRollOverMeasType	Used to create, update, read, or delete MeterRdWithRollOverMeasType in the WAM application. This component calls the W1-MeterRdWithRollOverMeasType business object using the Inbound Web Service.
W1-MeteredReadRollover	Used to create, update, read, or delete MeteredReadRollover in the WAM application. This component calls the W1-MeteredReadRollover business object using the Inbound Web Service.
W1-MsrmtNumericGaugeReason	Used to create, update, read, or delete MsrmtNumericGaugeReason in the WAM application. This component calls the W1-MsrmtNumericGaugeReason business object using the Inbound Web Service.
W1-MsrmtNumericMeterReason	Used to create, update, read, or delete MsrmtNumericMeterReason in the WAM application. This component calls the W1-MsrmtNumericMeterReason business object using the Inbound Web Service.
W1-MsrtQuckEntryCmplEvtType	Used to create, update, read, or delete MsrtQuckEntryCmplEvtType in the WAM application. This component calls the W1-MsrtQuckEntryCmplEvtType business object using the Inbound Web Service.
W1-NormalizationGenrlWeighted	Used to create, update, read, or delete NormalizationGenrlWeighted in the WAM application. This component calls the W1-NormalizationGenrlWeighted business object using the Inbound Web Service.
W1-NormalizationPercentOfNew	Used to create, update, read, or delete NormalizationPercentOfNew in the WAM application. This component calls the W1-NormalizationPercentOfNew business object using the Inbound Web Service.
W1-PermitOnlyChecklistType	Used to create, update, read, or delete PermitOnlyChecklistType in the WAM application. This component calls the W1-PermitOnlyChecklistType business object using the Inbound Web Service.
W1-SeederSyncReqMasterConfig	Used to create, update, read, or delete SeederSyncReqMasterConfig in the WAM application. This component calls the W1-SeederSyncReqMasterConfig business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-SrvHistFromActTyCmplEvtType	Used to create, update, read, or delete SrvHistFromActTyCmplEvtType in the WAM application. This component calls the W1-SrvHistFromActTyCmplEvtType business object using the Inbound Web Service.
W2-ServicePointWarning	Used to create, update, read, or delete ServicePointWarning in the WAM application. This component calls the W2-ServicePointWarning business object using the Inbound Web Service.
W2-Key	Used to create, update, read, or delete Key in the WAM application. This component calls the W2-Key business object using the Inbound Web Service.
W2-SynchronizationAddSP	Used to create, update, read, or delete SynchronizationAddSP in the WAM application. This component calls the W2-SynchronizationAddSP business object using the Inbound Web Service.
W1-ActivityCompletionEventType	Used to create, update, read, or delete ActivityCompletionEventType in the WAM application. This component calls the W1-ActivityCompletionEventType business object using the Inbound Web Service.
W1- AssetCompletionEventType	Used to create, update, read, or delete AssetCompletionEventType in the WAM application. This component calls the W1-AssetCompletionEventType business object using the Inbound Web Service.
W1- AssetDposCmpEvtType	Used to create, update, read, or delete AssetDposCmpEvtType in the WAM application. This component calls the W1-AssetDposCmpEvtType business object using the Inbound Web Service.
W1- AssetLocationType	Used to create, update, read, or delete AssetLocationType in the WAM application. This component calls the W1- AssetLocationType business object using the Inbound Web Service.
W1- AssetType	Used to create, update, read, or delete AssetType in the WAM application. This component calls the W1-AssetType business object using the Inbound Web Service.
W1- ComponentType	Used to create, update, read, or delete ComponentType in the WAM application. This component calls the W1-ComponentType business object using the Inbound Web Service
W1- DataAreaCmpEvtType	Used to create, update, read, or delete DataAreaCmpEvtType in the WAM application. This component calls the W1-DataAreaCmpEvtType business object using the Inbound Web Service.
W1- GeneralCompletionEventType	Used to create, update, read, or delete GeneralCompletionEventType in the WAM application. This component calls the W1-GeneralCompletionEventType business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-OrganizationType	Used to create, update, read, or delete OrganizationType in the WAM application. This component calls the W1-OrganizationType business object using the Inbound Web Service.
W1- ReplicationComplEventType	Used to create, update, read, or delete ReplicationComplEventType in the WAM application. This component calls the W1-ReplicationComplEventType business object using the Inbound Web Service.
W1-AmtBasedAppvlProf	Used to create, update, read, or delete AmtBasedAppvlProf in the WAM application. This component calls the W1-AmtBasedAppvlProf business object using the Inbound Web Service.
W1-AssessmentClass	Used to create, update, read, or delete AssessmentClass in the WAM application. This component calls the W1-AssessmentClass business object using the Inbound Web Service.
W1-AssessmentGroup	Used to create, update, read, or delete AssessmentGroup in the WAM application. This component calls the W1-AssessmentGroup business object using the Inbound Web Service.
W1-AssetTypeAverageCost	Used to create, update, read, or delete AssetTypeAverageCost in the WAM application. This component calls the W1-AssetTypeAverageCost business object using the Inbound Web Service.
W1-BillableRate	Used to create, update, read, or delete BillableRate in the WAM application. This component calls the W1-BillableRate business object using the Inbound Web Service.
W1-BusinessUnit	Used to create, update, read, or delete BusinessUnit in the WAM application. This component calls the W1-BusinessUnit business object using the Inbound Web Service.
W1-Buyer	Used to create, update, read, or delete Buyer in the WAM application. This component calls the W1-Buyer business object using the Inbound Web Service.
W1-CalendarAnniversary	Used to create, update, read, or delete CalendarAnniversary in the WAM application. This component calls the W1-CalendarAnniversary business object using the Inbound Web Service.
W1-CalendarInterval	Used to create, update, read, or delete CalendarInterval in the WAM application. This component calls the W1-CalendarInterval business object using the Inbound Web Service.
W1-CapabilityType	Used to create, update, read, or delete CapabilityType in the WAM application. This component calls the W1-CapabilityType business object using the Inbound Web Service.
W1-Circle	Used to create, update, read, or delete Circle in the WAM application. This component calls the W1-Circle business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-Color	Used to create, update, read, or delete Color in the WAM application. This component calls the W1-Color business object using the Inbound Web Service.
W1-CommodityCategory	Used to create, update, read, or delete CommodityCategory in the WAM application. This component calls the W1-CommodityCategory business object using the Inbound Web Service.
W1-CommodityName	Used to create, update, read, or delete CommodityName in the WAM application. This component calls the W1-CommodityName business object using the Inbound Web Service.
W1-CommodityType	Used to create, update, read, or delete CommodityType in the WAM application. This component calls the W1-CommodityType business object using the Inbound Web Service.
W1-ComponentTypeAverageCost	Used to create, update, read, or delete ComponentTypeAverageCost the in WAM application. This component calls the W1-ComponentTypeAverageCost business object using the Inbound Web Service.
W1-ContactType	Used to create, update, read, or delete ContactType in the WAM application. This component calls the W1-ContactType business object using the Inbound Web Service.
W1-CostCategory	Used to create, update, read, or delete CostCategory in the WAM application. This component calls the W1-CostCategory business object using the Inbound Web Service.
W1-CostCenter	Used to create, update, read, or delete CostCenter in the WAM application. This component calls the W1-CostCenter business object Inbound Web Service.
W1-Course	Used to create, update, read, or delete Course in the WAM application. This component calls the W1-Course business object using the Inbound Web Service.
W1-CrewType	Used to create, update, read, or delete CrewType in the WAM application. This component calls the W1-CrewType business object using the Inbound Web Service.
W1-DailyScheduleType	Used to create, update, read, or delete DailyScheduleType in the WAM application. This component calls the W1-DailyScheduleType business object using the Inbound Web Service.
W1-DistributionCode	Used to create, update, read, or delete DistributionCode in the WAM application. This component calls the W1-DistributionCode business object using the Inbound Web Service.
W1-DocActType	Used to create, update, read, or delete DocActType in the WAM application. This component calls the W1-DocActType business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-DocCmplEvntType	Used to create, update, read, or delete DocCmplEvntType in the WAM application. This component calls the W1-DocCmplEvntType business object using the Inbound Web Service.
W1-DocumentType	Used to create, update, read, or delete DocumentType in the WAM application. This component calls the W1-DocumentType business object using the Inbound Web Service.
W1-EmployeeType	Used to create, update, read, or delete EmployeeType in the WAM application. This component calls the W1-EmployeeType business object using the Inbound Web Service.
W1-Equipment	Used to create, update, read, or delete Equipment in the WAM application. This component calls the W1-Equipment business object using the Inbound Web Service.
W1-ExpenseCode	Used to create, update, read, or delete ExpenseCode in the WAM application. This component calls the W1-ExpenseCode business object using the Inbound Web Service.
W1-Factor	Used to create, update, read, or delete Factor in the WAM application. This component calls the W1-Factor business object using the Inbound Web Service.
W1-FactorValue	Used to create, update, read, or delete FactorValue in the WAM application. This component calls the W1-FactorValue business object using the Inbound Web Service.
W1-FailureComponent	Used to create, update, read, or delete FailureComponent in the WAM application. This component calls the W1-FailureComponent business object using the Inbound Web Service.
W1-FailureMode	Used to create, update, read, or delete FailureMode in the WAM application. This component calls the W1-FailureMode business object using the Inbound Web Service.
W1-FailureProfile	Used to create, update, read, or delete FailureProfile in the WAM application. This component calls the W1-FailureProfile business object using the Inbound Web Service.
W1-FailureProfileFailureComp	Used to create, update, read, or delete FailureProfileFailureComp in the WAM application. This component calls the W1-FailureProfileFailureComp business object using the Inbound Web Service.
W1-FailureProfileFailureMode	Used to create, update, read, or delete FailureProfileFailureMode in the WAM application. This component calls the W1-FailureProfileFailureMode business object using the Inbound Web Service.
W1-FailureProfileFailureRepair	Used to create, update, read, or delete FailureProfileFailureRepair in the WAM application. This component calls the W1-FailureProfileFailureRepair business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-FailureProfileFailureType	This component can be used to create/update/read/delete FailureProfileFailureType in WAM application. This component calls the business object W1- FailureProfileFailureType using the Inbound Web Service.
W1-FailureRepair	Used to create, update, read, or delete FailureRepair in the WAM application. This component calls the W1-FailureRepair business object using the Inbound Web Service.
W1-FailureType	Used to create, update, read, or delete FailureType in the WAM application. This component calls the W1-FailureType business object using the Inbound Web Service.
W1-FinancialMasterConfig	Used to create, update, read, or delete FinancialMasterConfig in the WAM application. This component calls the W1-FinancialMasterConfig business object using the Inbound Web Service.
W2-SynchronizationAddSP	Used to create, update, read, or delete SynchronizationAddSP in the WAM application. This component calls the W2-SynchronizationAddSP business object using the Inbound Web Service.
W2-ServicePointWarning	Used to create, update, read, or delete ServicePointWarning in the WAM application. This component calls the W2-ServicePointWarning business object using the Inbound Web Service.
W2-Key	Used to create, update, read, or delete Key in the WAM application. This component calls the W2-Key business object using the Inbound Web Service.
W1-Fob	Used to create, update, read, or delete Fob in the WAM application. This component calls the W1-Fob business object using the Inbound Web Service.
W1-Function	Used to create, update, read, or delete Function in the WAM application. This component calls the W1-Function business object using the Inbound Web Service.
W1-FunctionType	Used to create, update, read, or delete FunctionType in the WAM application. This component calls the W1-FunctionType business object using the Inbound Web Service.
W1-GaugeReadWithThresholdMeasType	Used to create, update, read, or delete GaugeReadWithThresholdMeasType in the WAM application. This component calls the W1-GaugeReadWithThresholdMeasType business object using the Inbound Web Service.
W1-GeneralAssetLocationType	Used to create/update/read/delete GeneralAssetLocationType in the WAM application. This component calls the business object Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-GeneralCompletionEventType	Used to create, update, read, or delete GeneralCompletionEventType in the WAM application. This component calls the W1-GeneralCompletionEventType business object using the Inbound Web Service.
W1-InventoryMgmtMasterConfig	Used to create, update, read, or delete InventoryMgmtMasterConfig in the WAM application. This component calls the W1-InventoryMgmtMasterConfig business object using the Inbound Web Service.
W1-LaborEarningType	Used to create, update, read, or delete LaborEarningType in the WAM application. This component calls the W1-LaborEarningType business object using the Inbound Web Service.
W1-LeaveType	Used to create, update, read, or delete LeaveType in the WAM application. This component calls the W1-LeaveType business object using the Inbound Web Service.
W1-Line	Used to create, update, read, or delete Line in the WAM application. This component calls the W1-Line business object using the Inbound Web Service.
W1-LinearAssetLocationType	Used to create, update, read, or delete LinearAssetLocationType in the WAM application. This component calls the W1-LinearAssetLocationType business object using the Inbound Web Service.
W1-MeasurementUOM	Used to create, update, read, or delete MeasurementUOM in the WAM application. This component calls the W1-MeasurementUOM business object using the Inbound Web Service.
W1-MeterReadWithRollOverMeasType	Used to create, update, read, or delete MeterReadWithRollOverMeasType in the WAM application. This component calls the W1-MeterReadWithRollOverMeasType business object using the Inbound Web Service.
W1-MsrtQuckEntryCmplEvtTyp	Used to create, update, read, or delete MsrtQuckEntryCmplEvtTyp in the WAM application. This component calls the W1-MsrtQuckEntryCmplEvtTyp business object using the Inbound Web Service.
W1-MTBFMTTRBuckets	Used to create, update, read, or delete MTBFMTTRBuckets in the WAM application. This component calls the W1-MTBFMTTRBuckets business object using the Inbound Web Service.
W1-NoAppvlRequiredProf	Used to create, update, read, or delete NoAppvlRequiredProf in the WAM application. This component calls the W1- NoAppvlRequiredProf business object using the Inbound Web Service.
W1-NonAmtBasedAppvlProf	Used to create, update, read, or delete NonAmtBasedAppvlProf in the WAM application. This component calls the W1-NonAmtBasedAppvlProf business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-NumericGauge	Used to create, update, read, or delete NumericGauge in the WAM application. This component calls the W1-NumericGauge business object using the Inbound Web Service.
W1-NumericMeter	Used to create, update, read, or delete NumericMeter in the WAM application. This component calls the W1-NumericMeter business object using the Inbound Web Service.
W1-OrganizationType	Used to create, update, read, or delete OrganizationType in the WAM application. This component calls the W1-OrganizationType business object using the Inbound Web Service.
W1-OutboundActivityType	Used to create, update, read, or delete OutboundActivityType in the WAM application. This component calls the W1- OutboundActivityType business object using the Inbound Web Service.
W1-Planner	Used to create, update, or delete Planner in the WAM application. This component calls W1-Planner business object using the Inbound Web Service ATW1Planner.
W1-OvertimeType	Used to create, update, read, or delete OvertimeType in the WAM application. This component calls the W1-OvertimeType business object using the Inbound Web Service.
W1-PaymentTerm	Used to create, update, read, or delete PaymentTerm in the WAM application. This component calls the W1-PaymentTerm business object using the Inbound Web Service.
W1-PersonWAM	Used to create, update, read, or delete PersonWAM in the WAM application. This component calls the W1-PersonWAM business object using the Inbound Web Service.
W1-PlantAssetLocationType	Used to create, update, read, or delete PlantAssetLocationType in the WAM application. This component calls the W1-PlantAssetLocationType business object using the Inbound Web Service.
W1-ProjectCategory	Used to create, update, read, or delete ProjectCategory in the WAM application. This component calls the W1-ProjectCategory business object using the Inbound Web Service.
W1-PurchaseCommodity	Used to create, update, read, or delete PurchaseCommodity in the WAM application. This component calls the W1-PurchaseCommodity business object using the Inbound Web Service.
W1-PurchasingMasterConfig	Used to create, update, read, or delete PurchasingMasterConfig in the WAM application. This component calls the W1-PurchasingMasterConfig business object using the Inbound Web Service.
W1-Question	Used to create, update, read, or delete Question in the WAM application. This component calls the W1-Question business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-ReadLogEntry	Used to read ReadLogEntry in the WAM application. This component uses the W1-ReadLogEntry business Service using the Inbound Web Service.
W1-ReadWithNoEvaluateMeasType	Used to create, update, read, or delete ReadWithNoEvaluateMeasType in the WAM application. This component calls the W1-ReadWithNoEvaluateMeasType business object using the Inbound Web Service.
W1-ResourceUOM	Used to create, update, read, or delete ResourceUOM in the WAM application. This component calls the W1-ResourceUOM business object using the Inbound Web Service.
W1-ScheduledActivityType	Used to create, update, read, or delete ScheduledActivityType in the WAM application. This component calls the W1-ScheduledActivityType business object using the Inbound Web Service.
W1-ScheduledActivityTypeWAM	Used to create, update, read, or delete ScheduledActivityTypeWAM in the WAM application. This component calls the W1-ScheduledActivityTypeWAM business object using the Inbound Web Service.
W1-SchedulePlanType	Used to create, update, read, or delete SchedulePlanType in the WAM application. This component calls the W1-SchedulePlanType business object using the Inbound Web Service.
W1-ServHistFromActTypeCmplEvntType	Used to create, update, read, or delete ServHistFromActTypeCmplEvntType in the WAM application. This component calls the W1-ServHistFromActTypeCmplEvntType business object using the Inbound Web Service.
W1-ServiceArea	Used to create, update, read, or delete ServiceArea in the WAM application. This component calls the W1-ServiceArea business object using the Inbound Web Service.
W1-ServiceClass	Used to create, update, read, or delete ServiceClass in the WAM application. This component calls the W1-ServiceClass business object using the Inbound Web Service.
W1-ShiftPlanTemplate	Used to create, update, or delete Shift Plan Template in the WAM application. This component calls the business object W1- ShiftPlanTemplate using the Inbound Web Service.
W1-ServiceHistoryType	Used to create, update, read, or delete ServiceHistoryType in the WAM application. This component calls the W1-ServiceHistoryType business object using the Inbound Web Service.
W1-ServiceHistTypeCmpEvtType	Used to create, update, read, or delete ServiceHistTypeCmpEvtType in the WAM application. This component calls the W1-ServiceHistTypeCmpEvtType business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-StorageLocationType	Used to create, update, read, or delete StorageLocationType in the WAM application. This component calls the W1-StorageLocationType business object using the Inbound Web Service.
W1-TaxRateSchedule	Used to create, update, read, or delete TaxRateSchedule in the WAM application. This component calls the W1-TaxRateSchedule business object using the Inbound Web Service.
W1-TimePeriod	Used to create, update, read, or delete TimePeriod in the WAM application. This component calls the W1-TimePeriod business object using the Inbound Web Service.
W1-WorkCalendar	Used to create, update, read, or delete WorkCalendar in the WAM application. This component calls the W1-WorkCalendar business object using the Inbound Web Service.
W1-WorkManagementMasterConfig	Used to create, update, read, or delete WorkManagementMasterConfig in the WAM application. This component calls the W1-WorkManagementMasterConfig business object using the Inbound Web Service.
W1-WorkPriorityBuckets	Used to create, update, read, or delete WorkPriorityBuckets in the WAM application. This component calls the W1-WorkPriorityBuckets business object using the Inbound Web Service.
W1-WorkReqCompletionEventType	Used to create, update, read, or delete WorkReqCompletionEventType in the WAM application. This component calls the W1-WorkReqCompletionEventType business object using the Inbound Web Service.
W1-WAssetInstallAgeBuckets	Used to create, update, read, or delete WAssetInstallAgeBuckets in the WAM application. This component calls the W1-WAssetInstallAgeBuckets business object using the Inbound Web Service.
W1-WAssetAgeBuckets	Used to create, update, read, or delete WAssetAgeBuckets in the WAM application. This component calls the W1-WAssetAgeBuckets business object using the Inbound Web Service.
W1-WAMBIExtractParameters	Used to create, update, read, or delete WAMBIExtractParameters in the WAM application. This component calls the W1-WAMBIExtractParameters business object using the Inbound Web Service.
W1-QuestionnaireSvcHistType	Used to create, update, read, or delete QuestionnaireSvcHistType in the WAM application. This component calls the W1-QuestionnaireSvcHistType business object using the Inbound Web Service.
W1-NumberOfCyclesOverdueBucket	Used to create, update, read, or delete NumberOfCyclesOverdueBucket in the WAM application. This component calls the W1-NumberOfCyclesOverdueBucket business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AssetCriticalityBuckets	Used to create, update, read, or delete AssetCriticalityBuckets in the WAM application. This component calls the W1-AssetCriticalityBuckets business object using the Inbound Web Service.
W1-AssetConditionScoreBuckets	Used to create, update, read, or delete AssetConditionScoreBuckets in the WAM application. This component calls the W1-AssetConditionScoreBuckets business object using the Inbound Web Service.
W1-GeneralCompletionEventType	Used to create, update, read, or delete GeneralCompletionEventType in the WAM application. This component calls the W1-GeneralCompletionEventType business object using the Inbound Web Service.
W1- ResourceMgmntMasterConfig	Used to create, update, read, or delete ResourceMgmntMasterConfigin the WAM application. This component calls the W1-ResourceMgmntMasterConfig business object using the Inbound Web Service.
W1-NUMGAUGESQL	Used to read/retrieve an Asset ID using Measurement ID. This component calls the CM-NUMGAUGE business service using the ATW1NUMGAUGESQL Inbound Web Service.
W1-NUMMETERSQL	Used to read/retrieve Measurement ID by using Measurement Type and Asset ID. This component calls the CM- NUMMETER business service using the ATW1NUMMETERSQL Inbound Web Service.
W1-SVCHSTWAMSQL	Used to read/retrieve Service History ID using Act ID. This component calls the CM-SVCHSTWAM business service using the ATW1SVCHSTWAMSQL Inbound Web Service.
W2-SmartMeterConfiguration	Used to create, update, read, or delete SmartMeterConfiguration in the WAM application. This component calls the W2-SmartMeterConfiguration business object using the Inbound Web Service.
W2-SiteLocation	Used to create, update, read, or delete SiteLocation in the WAM Apalication. This component calls the W2-SiteLocation business object using the Inbound Web Service.
W2-ServicePointInstruction	Used to create, update, read, or delete ServicePointInstruction in the WAM application. This component calls the W2-ServicePointInstruction business object using the Inbound Web Service.
W2-ManualMeterConfiguration	Used to create, update, read, or delete ManualMeterConfiguration in the WAM application. This component calls the W2-ManualMeterConfiguration business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W2-CommunicationComponentCfg	Used to create, update, read, or delete CommunicationComponentCfg in the WAM application. This component calls the W2-CommunicationComponentCfg business object using the Inbound Web Service.
W1-WAMToGISSyncMapping	Used to create, update, read, or delete WAMToGISSyncMapping in the WAM application. This component calls the W1-WAMToGISSyncMapping business object using the Inbound Web Service.
W1-SOMActivityType	Used to create, update, read, or deleteSOMActivityTypein the WAM ApplicationThis component calls theW1-SOMActivityType business object usingthe Inbound Web Service.
W1- PlannerWOSummary	Used to create, update, read, or delete PlannerWOSummary in the WAM application. This component calls the W1-PlannerWOSummary business object using the Inbound Web Service.
W1- AdjustmentType	Used to create, update, read, or delete AdjustmentType in the WAM application. This component calls the W1-AdjustmentType business object using the Inbound Web Service.
W1- BatchLoaderRequestType	Used to create, update, read, or delete BatchLoaderRequestType in the WAM application. This component calls the W1-BatchLoaderRequestType business object using the Inbound Web Service.
W1- ChangeRequestType	Used to create, update, read, or delete ChangeRequestType in the WAM application. This component calls the W1- ChangeRequestType business object using the ATW1ChangeRequestType Inbound Web Service.
W1- ChangeRequestRelatedObject	Used to create, update, read, or delete ChangeRequestRelatedObject in the WAM application. This component calls the W1-ChangeRequestRelatedObject business object using the ATW1 ChangeRequestRelatedObject Inbound Web Service.
W1-AccessGroupTables	Used to create, update, read, or delete AccessGroupTables in the WAM application. This component calls the W1-AccessGroupTables business object using the ATW1AccessGroupTables Inbound Web Service.
W1-AssetDisposition	Used to create, update, read, or delete AssetDisposition in the WAM application. This component calls the W1- AssetDisposition business object using the ATW1AssetDisposition Inbound Web Service.
W1-ERPIntegrationMasterConfig	Used to create, update, read, or delete ERPIntegrationMasterConfig in the WAM application. This component calls the W1-ERPIntegrationMasterConfig business object using the ATW1ERPIntegrationMasterConfig Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-HCMIntegrationMasterConfig	Used to create, update, read, or delete HCMIntegrationMasterConfig in the WAM application. This component calls the W1-HCMIntegrationMasterConfig business object using the ATW1HCMIntegrationMasterConfigInbound Web Service.
W1-TimShtQuickEntryCmplEvtType	Used to create, update, read, or delete Time Sheet Quick Entry Completion Event Types in the WAM application. This component calls the W1-TimShtQuickEntryCmplEvtType business object using the ATW1TimShtQuickEntryCmplEvtType Inbound Web Service.
W1-InspectionTypeDeficiency	Used to create, update, read, or delete InspectionTypeDeficiency in the WAM application. This component calls the W1-InspectionTypeDeficiency business object using the ATW1InspectionTypeDeficiency Inbound Web Service.
W1-InspectionTypePercentOfNew	Used to create, update, read, or delete InspectionTypePercentOfNew in the WAM application. This component calls the W1-InspectionTypePercentOfNew business object using the ATW1InspectionTypePercentOfNew Inbound Web Service.
W1-ResetAssetConditionRatinSHT	Used to create, update, read, or delete ResetAssetConditionRatinSHT in the WAM application. This component calls the W1-ResetAssetConditionRatinSHT business object using the ATW1ResetAssetConditionRatinSHT Inbound Web Service.
W1- ItemConfiguration	Used to create, update, read, or delete ItemConfiguration in the WAM application. This component calls the W1-ItemConfiguration business object using the ATW1ItemConfiguration Inbound Web Service.
W1-Timekeeper	Used to create, update, read, or delete Timekeeper in the WAM application. This component calls the W1-Timekeeper business object using the ATW1Timekeeper Inbound Web Service.

Asset Management

Component	Description
W1-CalendarWarranty	Used to create, update, read, or delete CalendarWarranty in the WAM application. This component calls the W1-CalendarWarranty business object using the Inbound Web Service.
W1-CalendarWarrantyTerm	Used to create, update, read, or delete CalendarWarrantyTerm in the WAM application. This component calls the W1-CalendarWarrantyTerm business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W2-CommunicationComponent	Used to create, update, read, or delete CommunicationComponent in the WAM application. This component calls the W2-CommunicationComponent business object using the Inbound Web Service.
W2-CommunicationRelay	Used to create, update, read, or delete CommunicationRelay in the WAM application. This component calls the W2-CommunicationRelay business object using the Inbound Web Service.
W2-ServicePoint	Used to create, update, read, or delete ServicePoint in the WAM application. This component calls the W2-ServicePoint business object using the Inbound Web Service.
W2-SmartMeter	Used to create, update, read, or delete SmartMeter in the WAM application. This component calls the W2-SmartMeter business object using the Inbound Web Service.
W2-CommunicationComponentSpec	Used to create, update, read, or delete CommunicationComponentSpec in the WAM application. This component calls the W2-CommunicationComponentSpec business object using the Inbound Web Service.
W2-CommunicationRelaySpec	Used to create, update, read, or delete CommunicationRelaySpec in the WAM application. This component calls the W2-CommunicationRelaySpec business object using the Inbound Web Service.
W1-FailureServiceHistory	Used to create, update, read, or delete FailureServiceHistory in the WAM application. This component calls the W1-FailureServiceHistory business object using the Inbound Web Service.
W2-FirmwareSpecification	Used to create, update, read, or delete FirmwareSpecification in the WAM application. This component calls the W2-FirmwareSpecification business object using the Inbound Web Service.
W1-FirmwareVersion	Used to create, update, read, or delete FirmwareVersion in the WAM application. This component calls the W1-FirmwareVersion business object using the Inbound Web Service.
W1-GeneralAssetLocation	Used to create, update, read, or delete GeneralAssetLocation in the WAM application. This component calls the W1-GeneralAssetLocation business object using the Inbound Web Service.
W1-InOutofServiceGeneralAsset	Used to create, update, read, or delete InOutofServiceGeneralAsset in the WAM application. This component calls the W1-InOutofServiceGeneralAsset business object using the Inbound Web Service.
W1-IOSvcGeneralComponent	Used to create, update, read, or delete InOutofServiceGeneralComponent in the WAM application. This component calls the W1-IOSvcGeneralComponent business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-IOSvcFleetAsset	Used to create, update, read, or delete IOSvcFleetAsset in the WAM application. This component calls the W1-IOSvcFleetAsset business object using the Inbound Web Service.
W1-IOSvcInfrastructureAsset	Used to create, update, read, or delete IOSvcInfrastructureAsset in the WAM application. This component calls the W1-IOSvcInfrastructureAsset business object using the Inbound Web Service.
W1-IOSvcITAsset	Used to create, update, read, or delete IOSvcITAsset in WAM the application. This component calls the W1-IOSvcITAsset business object using the Inbound Web Service.
W1-InOutSvcAsset	Used to create, update, read, or delete W1-InOutSvcAsset in WAM the application. This component calls the W1-InOutSvcAsset business object using the Inbound Web Service.
W1-InOutSvcComponent	Used to create, update, read, or delete W1-InOutSvcComponent in WAM the application. This component calls the W1-InOutSvcComponent business object using the Inbound Web Service.
W1-AssetLocation	Used to create, update, read, or delete W1-AssetLocation in WAM the application. This component calls the W1-AssetLocation business object using the Inbound Web Service.
W1-ServiceHistory	Used to create, update, read, or delete ServiceHistory in the WAM application. This component calls the W1-ServiceHistory business object using the Inbound Web Service.
W1-ServiceHistoryWAM	Used to create, update, read, or delete ServiceHistory in the WAM application. This component calls the W1-ServiceHistory(Deficiency/General Weighted/ Percent of New)business object using the Inbound Web Service.
W1-StoreroomInventoryMgmt	Used to create, update, read, or delete StoreroomInventoryMgmt in the WAM application. This component calls the W1-StoreroomInventoryMgmt business object using the Inbound Web Service.
W1-TrackedFleetSpecification	Used to create, update, read, or delete TrackedFleetSpecification in the WAM application. This component calls the W1-TrackedFleetSpecification business object using the Inbound Web Service.
W1-TrackedITSpecification	Used to create, update, read, or delete TrackedITSpecification in the WAM application. This component calls the W1-TrackedITSpecification business object using the Inbound Web Service.
W1-TrackedInfrastructureSpec	Used to create, update, read, or delete TrackedInfrastructureSpec in the WAM application. This component calls the W1-TrackedInfrastructureSpec business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-MsrmtQuickEntryCmplEvt	Used to create, update, read, or deleteMsrmtQuickEntryCmplEvt in the WAM application. This component calls the W1-MsrmtQuickEntryCmplEvt business object using the Inbound Web Service.
W1-IOSvcITComponent	Used to create, update, read, or delete IOSvcITComponent in the WAM application. This component calls the W1-IOSvcITComponent business object using the Inbound Web Service.
W1-LinearAssetLocation	Used to create, update, read, or delete LinearAssetLocation in the WAM application. This component calls the W1-LinearAssetLocation business object using the Inbound Web Service.
W2-ManualMeterSpecification	Used to create, update, read, or delete ManualMeterSpecification in the WAM application. This component calls the W2-ManualMeterSpecification business object using the Inbound Web Service.
W1-Manufacturer	Used to create, update, read, or delete Manufacturer in the WAM application. This component calls the W1-Manufacturer business object using the Inbound Web Service.
W1-MsrmtQuickEntryActivity	Used to create, update, read, or delete MsrmtQuickEntryActivity in the WAM application. This component calls the W1-MsrmtQuickEntryActivity business object using the Inbound Web Service.
W1-Organization	Used to create, update, read, or delete Organization in the WAM application. This component calls the W1-Organization business object using the Inbound Web Service.
W1-PlantAssetLocation	Used to create, update, read, or delete PlantAssetLocation in the WAM application. This component calls the W1-PlantAssetLocation business object using the Inbound Web Service.
W1-QuestionnaireSvcHist	Used to create, update, read, or delete QuestionnaireSvcHist in the WAM application. This component calls the W1-QuestionnaireSvcHist business object using the Inbound Web Service.
W1-RuntimeAnniversary	Used to create, update, read, or delete RuntimeAnniversary in the WAM application. This component calls the W1-RuntimeAnniversary business object using the Inbound Web Service.
W1-RuntimeInterval	Used to create, update, read, or delete RuntimeInterval in the WAM application. This component calls the W1-RuntimeInterval business object using the Inbound Web Service.
W1-RuntimeWarranty	Used to create, update, read, or delete RuntimeWarranty in the WAM application. This component calls the W1-RuntimeWarranty business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-RuntimeWarrantyTerm	Used to create, update, read, or delete RuntimeWarrantyTerm in the WAM application. This component calls the W1-RuntimeWarrantyTerm business object using the Inbound Web Service.
W2-ServicePoint	Used to create, update, read, or delete ServicePoint in the WAM application. This component calls the W2-ServicePoint business object using the Inbound Web Service.
W2-SmartMeterSpecification	Used to create, update, read, or delete SmartMeterSpecification in the WAM application. This component calls the W2-SmartMeterSpecification business object using the Inbound Web Service.
W1-StorageLocation	Used to create, update, read, or delete StorageLocation in the WAM application. This component calls the W1-StorageLocation business object using the Inbound Web Service.
W1-TrackedGeneralAsset	Used to create, update, read, or delete TrackedGeneralAsset in the WAM application. This component calls the W1-TrackedGeneralAsset business object using the Inbound Web Service.
W1-TrackedGeneralComponent	Used to create, update, read, or delete TrackedGeneralComponent in the WAM application. This component calls the W1-TrackedGeneralComponent business object using the Inbound Web Service.
W1-TrackedGeneralSpecification	Used to create, update, read, or delete TrackedGeneralSpecification in the WAM application. This component calls the W1-TrackedGeneralSpecification business object using the Inbound Web Service.
W1-TrackedITAsset	Used to create, update, read, or delete TrackedITAsset in the WAM application. This component calls the W1-TrackedITAsset business object using the Inbound Web Service.
W1-TrackedITComponent	Used to create, update, read, or delete TrackedITComponent in the WAM application. This component calls the W1-TrackedITComponent business object using the Inbound Web Service.
W2-Vehicle	Used to create, update, read, or delete Vehicle in the WAM application. This component calls the W2-Vehicle business object using the Inbound Web Service.
W1-ServiceCondition	Used to create, update, read, or delete ServiceCondition in the WAM Application. This component calls the W1-ServiceCondition business object using the ATW1ServiceCondition Inbound Web Service.
W1- AssetTypePerformance	Used to update or read, AssetTypePerformance in the WAM application. This component calls the W2- AssetTypePerformance business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1- AssetPerformance	Used to update, read, or delete AssetPerformance in the WAM application. This component calls the W1- AssetPerformance business object using the ATW1 AssetPerformance Inbound Web Service.
W2- ManualMeter	Used to update, read, or delete ManualMeter in the WAM application. This component calls the W2-ManualMeter business object using the ATW2ManualMeter Inbound Web Service.
W1- Specification	Used to update, read, or delete Specificationin the WAM application. This component calls the W1-Specification business object using the ATW2ManualMeter Inbound Web Service.
W1- SiteLocation	Used to update, read, or delete SiteLocation the WAM application. This component calls the W1-SiteLocation business object using the ATW1SiteLocation Inbound Web Service.
W1-ResetAssetConditionRatingSH	Used to update, read, or delete ResetAssetConditionRatingServiceHistory in the WAM application. This component calls the W1-ResetAssetConditionRatingSH business object using the ATW1ResetAssetConditionRatingSH Inbound Web Service.
W1- Item	Used to update, read, or delete Item in the WAM application. This component calls the W1-Item business object using the ATW1Item Inbound Web Service.
W1- AssetDownTime	Used to update, read, or delete AssetDownTime in the WAM application. This component calls the W1-AssetDownTime business object using the ATW1AssetDownTime Inbound Web Service.
W1-InspectionDeficiency	Used to update, read, or delete InspectionDeficiency in the WAM application. This component calls the W1-InspectionDeficiency business object using the ATW1InspectionDeficiency Inbound Web Service.
W1-InspectionPercentOfNew	Used to update, read, or delete InspectionPercentOfNew in the WAM application. This component calls the W1-InspectionPercentOfNew business object using the ATW1InspectionPercentOfNew Inbound Web Service.
W1- ItemSpecification	Used to update, read, or delete ItemSpecification in the WAM application. This component calls the W1-ItemSpecification business object using the ATW1ItemSpecification Inbound Web Service.
W1- ProcessType	Used to update, read, or delete ProcessType in theWAM application. This component calls the W1-ProcessType business object using the ATW1 ProcessType Inbound Web Service.
W1- MobileUpdWorkedAssetCmpEvt	Used to update, read, or delete MobileUpdWorkedAssetCmpEvt in the WAM application. This component calls the W1-MobileUpdWorkedAssetCmpEvt business object using the ATW1MobileUpdWorkedAssetCmpEvt Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1- Process	Used to update, read, or delete Process in the WAM application. This component calls the W1-Process business object using the ATW1Process Inbound Web Service.
W1- ASTATT	Used to update, read, or delete ASTATT in the WAM application. This component calls the W1-ASTATT business Service using the ATW1ATATT Inbound Web Service.
W1- ItemServicePoint	Used to update, read, or delete ItemServicePoint in the WAM application. This component calls the W1-ItemServicePoint business Service using the ATW1ItemServicePoint Inbound Web Service.
W1-CMAssetInformation	Used to search asset details through Asset information in the WAM application. This component calls the CM-ASSETQ1 business process using Inbound Web Service.
W1-CMAssetIdentifier	Used to search asset details using asset identifier in the WAM application. This component calls the CM-ASSETQ2 business Service using Inbound Web Service.
W1-CMAssetDisposition	Used to search asset using asset disposition details in the WAM application. This component calls the CM-ASSETQ3 business service using Inbound Web Service.
W1-CMAssetSpecification	Used to search asset using asset specification details in the WAM application. This component calls the CM-ASSETQ4 business service using Inbound Web Service.
W1-CMEmployeeInformation	Used to search asset using employee information details in the WAM application. This component calls the CM-ASSETQ5 business service using Inbound Web Service.
W1-CMInstallDate	Used to search asset using install date details in the WAM application. This component calls the CM-ASSETQ6 business service using Inbound Web Service.
W1-CMAssetMaintenanceSpecification	Used to search asset using asset maintenance specification details in the WAM application. This component calls the CM-ASSETQ7 business service using Inbound web service.
W1-CMAssetAttribute	Used to search asset using asset attributes details in the WAM application. This component calls the CM-ASSETQ8 business service using Inbound web service.
W1-CMAssetLocationByAssetLocationInformation	Used to search asset location details using asset location Information in the WAM application. This component calls the CM-ASLOQ1 business Service using Inbound Web Service.
W1-AssetComponentHistory	Used to fetch asset component history using system information in the WAM application. This component calls the CM-ASTCMPHST business service using Inbound web service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CMAssetLocationByContactName	Used to search asset location using contact information in the WAM application. This component calls the CM-ASLOQ3 business service using Inbound web service.
W1-CMAssetLocationByLatitudeandLongitude	Used to search asset location using latitude and longitude information in the WAM application. This component calls the CM-ASLOQ5 business service using Inbound web service.
W1-CMAssetLocationBySystem	Used to search asset location details using system information in the WAM application. This component calls the CM-ASLOQ6 business service using Inbound web service.
W1- GeneralProcess	Used to update, read, or delete GeneralProcess in the WAM application. This component calls the W1-GeneralProcess business Service using the ATW1GeneralProcess Inbound Web Service.
W1-RetAstCostCatSum	Used to fetch Asset Cost category information like maintenance amount, operational amount, etc using Asset ID. This component calls the W1-RetAsCstCatSum business Service using the ATW1RetAsCstCatSum Inbound Web Service.
W1-RetAstCostCatSum	Used to fetch Asset Cost category information, such as maintenance amount, operational amount, etc using Asset ID. This component calls the W1-RetAsCstCatSum business Service using the ATW1RetAsCstCatSum Inbound Web Service.
W1-SingleAssetConfigRead	Used to query an existing Single Asset Config record. This component invokes the ATW1SingleAssetConfig Inbound Web Service using W1-SingleAssetConfig BO.
W1-SingleAssetConfigUpdate	Used to update an existing Single Asset Config record. This component invokes the ATW1SingleAssetConfig Inbound Web Service using W1-SingleAssetConfig BO.
W1-AssetLocationAdd	Used to add an Operational Device Asset Location record. This component invokes the Inbound Web Service ATW1AssetLocation using the W1-AssetLocation Business Object.
W1-AssetLocationDelete	Used to delete an Operational Device Asset Location record. This component invokes the Inbound Web Service ATW1AssetLocation using the W1-AssetLocation Business Object.
W1-AssetLocationRead	Used to read an Operational Device Asset Location record. This component invokes the Inbound Web Service ATW1AssetLocation using the W1-AssetLocation Business Object.
W1-AssetLocationUpdate	Used to update an Operational Device Asset Location record. This component invokes the Inbound Web Service ATW1AssetLocation using the W1-AssetLocation Business Object.
W1-BasicTestAdd	Used to add an Operational Device Basic Test record. This component invokes the Inbound Web Service ATW1BasicTest using the W1-BasicTest business object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-BasicTestDelete	Used to delete an Operational Device Basic Test record. This component invokes the Inbound Web Service ATW1BasicTest using the W1-BasicTest business object.
W1-BasicTestRead	Used to read an Operational Device Basic Test record. This component invokes the Inbound Web Service ATW1BasicTest using the W1-BasicTest business object.
W1-BasicTestUpdate	Used to update an Operational Device Basic Test record. This component invokes the Inbound Web Service ATW1BasicTest using the W1-BasicTest business object.
W1-ServiceHistoryAdd	Used to add a Service History record. This component invokes the Inbound Web Service ATW1ServiceHistory using the W1-ServiceHistory business object.
W1-ServiceHistoryDelete	Used to delete a Service History record. This component invokes the Inbound Web Service ATW1ServiceHistory using the W1-ServiceHistory business object.
W1-ServiceHistoryRead	Used to read a Service History record. This component invokes the Inbound Web Service ATW1ServiceHistory using the W1-ServiceHistory business object.
W1-ServiceHistoryUpdate	Used to update a Service History record. This component invokes the Inbound Web Service ATW1ServiceHistory using the W1-ServiceHistory business object.
W2-CommComponentAdd	Used to add a Communication Component record. This component invokes the Inbound Web Service ATW2CommunicationComponent using the W2-CommunicationComponent Business Object.
W2-CommComponentDelete	Used to delete a Communication Component record. This component invokes the Inbound Web Service ATW2CommunicationComponent using the W2-CommunicationComponent Business Object.
W2-CommComponentRead	Used to read a Communication Component record. This component invokes the Inbound Web Service ATW2CommunicationComponent using the W2-CommunicationComponent Business Object.
W2-CommComponentUpdate	Used to update a Communication Component record. This component invokes the Inbound Web Service ATW2CommunicationComponent using the W2-CommunicationComponent Business Object.
W2-CommCompSpecificationAdd	Used to add a Comm Comp Specification record. This component invokes the Inbound Web Service ATW2CommunicationComponentSpec using the W2-CommunicationComponentSpec Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W2-CommCompSpecificationDelete	Used to delete a Comm Comp Specification record. This component invokes the Inbound Web Service ATW2CommunicationComponentSpec using the W2-CommunicationComponentSpec Business Object.
W2-CommCompSpecificationRead	Used to read a Comm Comp Specification record. This component invokes the Inbound Web Service ATW2CommunicationComponentSpec using the W2-CommunicationComponentSpec Business Object.
W2-CommCompSpecificationUpdate	Used to update a Comm Comp Specification record. This component invokes the Inbound Web Service ATW2CommunicationComponentSpec using the W2-CommunicationComponentSpec Business Object.
W2-CommRelaySpecificationAdd	Used to add a Comm Relay Specification record. This component invokes the Inbound Web Service ATW2CommunicationRelaySpec using the W2-CommunicationRelaySpec Business Object.
W2-CommRelaySpecificationDelete	Used to delete a Comm Relay Specification record. This component invokes the Inbound Web Service ATW2CommunicationRelaySpec using the W2-CommunicationRelaySpec Business Object.
W2-CommRelaySpecificationRead	Used to read a Comm Relay Specification record. This component invokes the Inbound Web Service ATW2CommunicationRelaySpec using the W2-CommunicationRelaySpec Business Object.
W2-CommRelaySpecificationUpdate	Used to update a Comm Relay Specification record. This component invokes the Inbound Web Service ATW2CommunicationRelaySpec using the W2-CommunicationRelaySpec Business Object.
W2-CommunicationRelayAdd	Used to add a Communication Relay record. This component invokes the Inbound Web Service ATW2CommunicationRelay using the W2-CommunicationRelay Business Object.
W2-CommunicationRelayDelete	Used to delete a Communication Relay record. This component invokes the Inbound Web Service ATW2CommunicationRelay using the W2-CommunicationRelay Business Object.
W2-CommunicationRelayRead	Used to read a Communication Relay record. This component invokes the Inbound Web Service ATW2CommunicationRelay using the W2-CommunicationRelay Business Object.
W2-CommunicationRelayUpdate	Used to update a Communication Relay record. This component invokes the Inbound Web Service ATW2CommunicationRelay using the W2-CommunicationRelay Business Object.
W2-FirmwareSpecificationAdd	Used to add a Firmware Specification record. This component invokes the Inbound Web Service ATW2FirmwareSpecification using the W2-FirmwareSpecification Business Object.
W2-FirmwareSpecificationDelete	Used to delete a Firmware Specification record. This component invokes the Inbound Web Service ATW2FirmwareSpecification using the W2-FirmwareSpecification Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W2-FirmwareSpecificationRead	Used to read a Firmware Specification record. This component invokes the Inbound Web Service ATW2FirmwareSpecification using the W2-FirmwareSpecification Business Object.
W2-FirmwareSpecificationUpdate	Used to update a Firmware Specification record. This component invokes the Inbound Web Service ATW2FirmwareSpecification using the W2-FirmwareSpecification Business Object.
W2-FirmwareVersionAdd	Used to add a Firmware Version record. This component invokes the Inbound Web Service ATW2FirmwareVersion using the W2-FirmwareVersion Business Object.
W2-FirmwareVersionDelete	Used to delete a Firmware Version record. This component invokes the Inbound Web Service ATW2FirmwareVersion using the W2-FirmwareVersion Business Object.
W2-FirmwareVersionRead	Used to read a Firmware Version record. This component invokes the Inbound Web Service ATW2FirmwareVersion using the W2-FirmwareVersion Business Object.
W2-FirmwareVersionUpdate	Used to update a Firmware Version record. This component invokes the Inbound Web Service ATW2FirmwareVersion using the W2-FirmwareVersion Business Object.
W2-ManualMeterAdd	Used to add an Analog Meter record. This component invokes the Inbound Web Service ATW2ManualMeter using the W2-ManualMeter Business Object.
W2-ManualMeterDelete	Used to delete an existing Analog Meter record. This component invokes the Inbound Web Service ATW2ManualMeter using the W2-ManualMeter Business Object.
W2-ManualMeterRead	Used to read an existing Analog Meter record. This component invokes the Inbound Web Service ATW2ManualMeter using the W2-ManualMeter Business Object.
W2-ManualMeterUpdate	Used to update an existing Analog Meter record. This component invokes the Inbound Web Service ATW2ManualMeter using the W2-ManualMeter Business Object.
W2-ManualMeterSpecificationAdd	Used to add an Analog Meter Specification record. This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.
W2-ManualMeterSpecificationDelete	Used to delete an Analog Meter Specification record. This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.
W2-ManualMeterSpecificationRead	Used to read an Analog Meter Specification record. This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W2-ManualMeterSpecificationUpdate	Used to update an Analog Meter Specification record. This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.
W2-SmartMeterAdd	Used to add a Smart Meter record. This component invokes the Inbound Web Service ATW2SmartMeter using the W2-SmartMeter Business Object.
W2-SmartMeterDelete	Used to delete an existing Smart Meter record. This component invokes the Inbound Web Service ATW2SmartMeter using the W2-SmartMeter Business Object.
W2-SmartMeterRead	Used to read an existing Smart Meter record. This component invokes the Inbound Web Service ATW2SmartMeter using the W2-SmartMeter Business Object.
W2-SmartMeterUpdate	Used to update an existing Smart Meter record. This component invokes the Inbound Web Service ATW2SmartMeter using the W2-SmartMeter Business Object.
W2-SmartMeterSpecificationAdd	Used to add a Smart Meter Specification record. This component invokes the Inbound Web Service ATW2SmartMeterSpecification using the W2-SmartMeterSpecification Business Object.
W2-SmartMeterSpecificationDelete	Used to delete a Smart Meter Specification record. This component invokes the Inbound Web Service ATW2ManualMeterSpecification using the W2-ManualMeterSpecification Business Object.
W2-SmartMeterSpecificationRead	Used to read a Smart Meter Specification record. This component invokes the Inbound Web Service ATW2SmartMeterSpecification using the W2-SmartMeterSpecification Business Object.
W2-SmartMeterSpecificationUpdate	Used to update a Smart Meter Specification record. This component invokes the Inbound Web Service ATW2SmartMeterSpecification using the W2-SmartMeterSpecification Business Object.
W2-SmartTestAdd	Used to add a Smart Device Test record. This component invokes the Inbound Web Service ATW2SmartTest using the W2-SmartTest Business Object.
W2-SmartTestDelete	Used to delete an existing Smart Device Test record. This component invokes the Inbound Web Service ATW2SmartTest using the W2-SmartTest Business Object.
W2-SmartTestRead	Used to query an existing Smart Device Test record. This component invokes the Inbound Web Service ATW2SmartTest using the W2-SmartTest Business Object.
W2-SmartTestUpdate	Used to update an existing Smart Device Test record. This component invokes the Inbound Web Service ATW2SmartTest using the W2-SmartTest Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AACCfgDeviceUpgradeAdd	Used to add a Configuration - Device - Asset to Component record.This component invokes the Inbound Web Service ATW1AACCfgDeviceUpgrade using W1-AACCfgDeviceUpgrade Business Object.
W1-AACCfgDeviceUpgradeDelete	Used to delete an existing a Configuration - Device - Asset to Component record. This component invokes the Inbound Web Service ATW1AACCfgDeviceUpgrade using W1-AACCfgDeviceUpgrade Business Object.
W1-AACCfgDeviceUpgradeRead	Used to query an existing Configuration - Device - Asset to Component record. This component invokes the Inbound Web Service ATW1AACCfgDeviceUpgrade using W1-AACCfgDeviceUpgrade Business Object.
W1-AACCfgDeviceUpgradeUpdate	Used to update an existing Configuration - Device - Asset to Component record. This component invokes the Inbound Web Service ATW1AACCfgDeviceUpgrade using W1-AACCfgDeviceUpgrade Business Object.
W1-AACfgDeviceUpgradeAdd	Used to create a Configuration - Device - Asset to Asset record. This component invokes the Inbound Web Service ATW1AACfgDeviceUpgrade using W1-AACfgDeviceUpgrade Business Object.
W1-AACfgDeviceUpgradeDelete	Used to delete an existing Configuration - Device - Asset to Asset record. This component invokes the Inbound Web Service ATW1AACfgDeviceUpgrade using W1-AACfgDeviceUpgrade Business Object.
W1-AACfgDeviceUpgradeRead	Used to query an existing Configuration - Device - Asset to Asset record. This component invokes the Inbound Web Service ATW1AACfgDeviceUpgrade using W1-AACfgDeviceUpgrade Business Object.
W1-AACfgDeviceUpgradeUpdate	Used to update an existing Configuration - Device - Asset to Asset record. This component invokes the Inbound Web Service ATW1AACfgDeviceUpgrade using W1-AACfgDeviceUpgrade Business Object.
W1-ACACCfgDeviceUpgradeAdd	Used to create a Configuration - Device - Component to Component record. This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.
W1-ACACCfgDeviceUpgradeDelete	Used to delete an existing Configuration - Device - Component to Component record. This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.
W1-ACACCfgDeviceUpgradeRead	Used to query an existing Configuration - Device - Component to Component record. This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-ACACCfgDeviceUpgradeUpdate	Used to update an existing Configuration - Device - Component to Component record. This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.
W1-ACACfgDeviceUpgradeAdd	Used to create a Configuration - Device - Component to Asset record. This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.
W1-ACACfgDeviceUpgradeDelete	Used to delete an existing Configuration - Device - Component to Asset record. This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.
W1-ACACfgDeviceUpgradeRead	Used to query an existing Configuration - Device - Component to Asset record. This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.
W1-ACACfgDeviceUpgradeUpdate	Used to update an existing Configuration - Device - Component to Asset record. This component invokes the Inbound Web Service ATW1ACACfgDeviceUpgrade using W1-ACACfgDeviceUpgrade Business Object.
W1-ACCfgDeviceUpgradeAdd	Used to create a Configuration - Device - Component record. This component invokes the Inbound Web Service ATW1ACCfgDeviceUpgrade using W1-ACCfgDeviceUpgrade Business Object.
W1-ACCfgDeviceUpgradeDelete	Used to delete an existing Device - Component record. This component invokes the Inbound Web Service ATW1ACCfgDeviceUpgrade using W1-ACCfgDeviceUpgrade Business Object.
W1-ACCfgDeviceUpgradeRead	Used to query an existing Device - Component record. This component invokes the Inbound Web Service ATW1ACCfgDeviceUpgrade using W1-ACCfgDeviceUpgrade Business Object.
W1-ACCfgDeviceUpgradeUpdate	Used to update an existing Device - Component record. This component invokes the Inbound Web Service ATW1ACCfgDeviceUpgrade using W1-ACCfgDeviceUpgrade Business Object.
W1-ACfgDeviceUpgradeAdd	Used to create a Configuration - Device Asset record. This component invokes the Inbound Web Service ATW1ACfgDeviceUpgrade using W1-ACfgDeviceUpgrade Business Object.
W1-ACfgDeviceUpgradeDelete	Used to delete a Configuration - Device Asset record. This component invokes the Inbound Web Service ATW1ACfgDeviceUpgrade using W1-ACfgDeviceUpgrade Business Object.
W1-ACfgDeviceUpgradeRead	Used to query an existing Configuration - Device Asset record. This component invokes the Inbound Web Service ATW1ACfgDeviceUpgrade using W1-ACfgDeviceUpgrade Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-ACfgDeviceUpgradeUpdate	Used to update an existing Configuration - Device Asset record. This component invokes the Inbound Web Service ATW1ACfgDeviceUpgrade using W1-ACfgDeviceUpgrade Business Object.
W1-ActivityComplInboundCommAdd	Used to create an Inbound Communication record. This component invokes the Inbound Web Service ATW1ActivityComplInboundComm using W1-ActivityComplInboundComm Business Object.
W1-ActivityComplInboundCommDelete	Used to create an Inbound Communication record. This component invokes the Inbound Web Service ATW1ActivityComplInboundComm using W1-ActivityComplInboundComm Business Object.
W1-ActivityComplInboundCommRead	Used to query an existing Inbound Communication Record. This component invokes the Inbound Web Service ATW1ActivityComplInboundComm using W1-ActivityComplInboundComm Business Object.
W1-ActivityComplInboundCommUpdate	Used to update an existing Inbound Communication Record. This component invokes the Inbound Web Service ATW1ActivityComplInboundComm using W1-ActivityComplInboundComm Business Object.
W1-ActivityNotesAdd	Used to create an Activity Notes record. This component invokes the Inbound Web Service ATW1ActivityNotes W1-ActivityNotes using Business Object.
W1-ActivityNotesDelete	Used to delete an existing Activity Notes record. This component invokes the Inbound Web Service ATW1ActivityNotes using W1-ActivityNotes Business Object.
W1-ActivityNotesRead	Used to query an existing Activity Notes record. This component invokes the Inbound Web Service ATW1ActivityNotes using W1-ActivityNotes Business Object.
W1-ActivityNotesUpdate	Used to query an existing Activity Notes record. This component invokes the Inbound Web Service ATW1ActivityNotes using W1-ActivityNotes Business Object.
W1-AdHocActCoreNoLocationAdd	Used to create an Adhoc Activity Core No Location record.This component invokes the Inbound Web Service ATW1AdHocActCoreNoLocation using W1- AdHocActCoreNoLocation Business Object.
W1-AdHocActCoreNoLocationDelete	Used to delete an existing Adhoc Activity Core No Location record. This component invokes the Inbound Web Service ATW1AdHocActCoreNoLocation using W1-AdHocActCoreNoLocation Business Object.
W1-AdHocActCoreNoLocationRead	Used to query an existing Adhoc Activity Core No Location record. This component invokes the Inbound Web Service ATW1AdHocActCoreNoLocation using W1-AdHocActCoreNoLocation Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AdHocActCoreNoLocationUpdate	Used to delete an existing Adhoc Activity Core No Location record. This component invokes the Inbound Web Service ATW1AdHocActCoreNoLocation using W1-AdHocActCoreNoLocation Business Object.
W1-AdHocActivityCoreAdd	Used to create an Adhoc Activity Core record. This component invokes the Inbound Web Service ATW1AdHocActivityCore using W1-AdHocActivityCore Business Object.
W1-AdHocActivityCoreDelete	Used to delete an existing Adhoc Activity Core record. This component invokes the Inbound Web Service ATW1AdHocActivityCore using W1-AdHocActivityCore Business Object.
W1-AdHocActivityCoreRead	Used to query existing Adhoc Activity Core record. This component invokes the Inbound Web Service ATW1AdHocActivityCore using W1-AdHocActivityCore Business Object.
W1-AdHocActivityCoreUpdate	Used to query existing Adhoc Activity Core record. This component invokes the Inbound Web Service ATW1AdHocActivityCore using W1-AdHocActivityCore Business Object.
W1-AssetCompCfgWOAdd	Used to create a Configuration - Asset Component record. This component invokes the Inbound Web Service ATW1AssetCompCfgWO using W1-AssetCompCfgWO Business Object.
W1-AssetCompCfgWODelete	Used to delete an existing Configuration - Asset Component record. This component invokes the Inbound Web Service ATW1AssetCompCfgWO using W1-AssetCompCfgWO Business Object.
W1-AssetCompCfgWORead	Used to delete an existing Configuration - Asset Component record. This component invokes the Inbound Web Service ATW1AssetCompCfgWO using W1-AssetCompCfgWO Business Object.
W1-AssetCompCfgWOUpdate	Used to update an existing Configuration - Asset Component record. This component invokes the Inbound Web Service ATW1AssetCompCfgWO using W1-AssetCompCfgWO Business Object.
W1-AssetCompToAssetCfgWOAdd	Used to create a Configuration - Component to Asset record. This component invokes the Inbound Web Service ATW1AssetCompToAssetCfgWO using W1-AssetCompToAssetCfgWO Business Object.
W1-AssetCompToAssetCfgWODelete	Used to delete a Configuration - Component to Asset record. This component invokes the Inbound Web Service ATW1AssetCompToAssetCfgWO using W1-AssetCompToAssetCfgWO Business Object.
W1-AssetCompToAssetCfgWORead	Used to update an existing Configuration - Component to Asset record. This component invokes the Inbound Web Service ATW1AssetCompToAssetCfgWO using W1-AssetCompToAssetCfgWO Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AssetCompToAssetCfgWOUpdate	Used to update an existing Configuration - Component to Asset record. This component invokes the Inbound Web Service used to update an existing Configuration - Component using W1-AssetCompToAssetCfgWO Business Object.
W1-ssetCompToAssetCompCfgWOAdd	Used to create an Configuration - Component to Component record. This component invokes the Inbound Web Service ATW1AssetCompToAssetCompCfgWO using W1-AssetCompToAssetCompCfgWO Business Object.
W1-AssetCompToAssetCompCfg WODelete	Used to delete an existing Configuration - Component to Component record. This component invokes the Inbound Web Service ATW1AssetCompToAssetCompCfgWO using W1-AssetCompToAssetCompCfgWO Business Object.
W1-AssetCompToAssetCompCfg WORead	Used to query an existing Configuration - Component to Component record. This component invokes the Inbound Web Service ATW1AssetCompToAssetCompCfgWO using W1-AssetCompToAssetCompCfgWO Business Object.
W1-AssetCompToAssetCompCfg WOUpdate	Used to update an existing Configuration - Component to Component record. This component invokes the Inbound Web Service ATW1AssetCompToAssetCompCfgWO using W1-AssetCompToAssetCompCfgWO Business Object.
W1-AssetCriteriaActGeneratorAdd	Used to create an Activity Generator - Asset Criteria record. This component invokes the Inbound Web Service ATW1AssetCriteriaActGenerator using W1-AssetCriteriaActGenerator Business Object.
W1-AssetCriteriaActGeneratorDelete	Used to delete an existing Activity Generator - Asset Criteria.This component invokes the Inbound Web Service ATW1AssetCriteriaActGenerator using W1-AssetCriteriaActGenerator Business Object.
W1-AssetCriteriaActGeneratorRead	Used to query an existing Activity Generator - Asset Criteria record. This component invokes the Inbound Web Service ATW1AssetCriteriaActGenerator using W1-AssetCriteriaActGenerator Business Object.
W1-AssetCriteriaActGeneratorUpdate	Used to query an existing Activity Generator - Asset Criteria record. This component invokes the Inbound Web Service ATW1AssetCriteriaActGenerator using W1-AssetCriteriaActGenerator Business Object.
W1-AssetListActGeneratorAdd	Used to create an Activity Generator - Asset List record.This component invokes the Inbound Web Service ATW1AssetListActGenerator using W1-AssetListActGenerator Business Object.
W1-AssetListActGeneratorDelete	Used to delete an existing Activity Generator - Asset List record.This component invokes the Inbound Web Service ATW1AssetListActGenerator using W1-AssetListActGenerator Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AssetListActGeneratorRead	Used to query an existing Activity Generator - Asset List record. This component invokes the Inbound Web Service ATW1AssetListActGenerator using W1-AssetListActGenerator Business Object.
W1-AssetListActGeneratorUpdate	Used to update an existing Activity Generator - Asset List record. This component invokes the Inbound Web Service ATW1AssetListActGenerator using W1-AssetListActGenerator Business Object.
W1-AssetReplicationActivityAdd	Used to create an Asset Replication Activity record. This component invokes the Inbound Web Service ATW1AssetReplicationActivity using W1-AssetReplicationActivity Business Object.
W1-AssetReplicationActivityDelete	Used to delete an existing Asset Replication Activity record.This component invokes the Inbound Web Service ATW1AssetReplicationActivity using W1-AssetReplicationActivity Business Object.
W1-AssetReplicationActivityRead	Used to query an existing Asset Replication Activity record. This component invokes the Inbound Web Service ATW1AssetReplicationActivity using W1-AssetReplicationActivity Business Object.
W1-AssetReplicationActivityUpdate	Used to update an existing Asset Replication Activity record. This component invokes the Inbound Web Service ATW1AssetReplicationActivity using W1-AssetReplicationActivity Business Object.
W1-AssetReplicationComplEventAdd	Used to create a Completion Event record. This component invokes the Inbound Web Service ATW1AssetReplicationComplEvent using W1-AssetReplicationComplEvent Business Object.
W1-AssetReplicationComplEventDelete	Used to delete a Completion Event record. This component invokes the Inbound Web Service ATW1AssetReplicationComplEvent using W1-AssetReplicationComplEvent Business Object.
W1-AssetReplicationComplEventRead	Used to query an existing Completion Event record. This component invokes the Inbound Web Service ATW1AssetReplicationComplEvent using W1-AssetReplicationComplEvent Business Object.
W1-AssetReplicationComplEventUpdate	Used to update an existing Completion Event record. This component invokes the Inbound Web Service ATW1AssetReplicationComplEvent using W1-AssetReplicationComplEvent Business Object.
W1-AssetToAssetCompCfgWOAdd	Used to create a Configuration - Asset to Component record This component invokes the Inbound Web ServiceATW1AssetToAssetCompCfgWO using W1-AssetToAssetCompCfgWO Business Object.
W1-AssetToAssetCompCfgWODelete	Used to delete an existing Configuration - Asset to Component record. This component invokes the Inbound Web Service ATD1CutServiceForNonPayment using D1-CutServiceForNonPayment Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AssetToAssetCompCfgWORead	Used to query an existing Configuration - Asset to Component record This component invokes the Inbound Web Service ATW1AssetToAssetCompCfgWO using W1-AssetToAssetCompCfgWO Business Object.
W1-AssetToAssetCompCfgWOUpdate	Used to update an existing Configuration - Asset to Component record. This component invokes the Inbound Web Service ATD1CutServiceForNonPayment using D1-CutServiceForNonPayment Business Object.
W1-BasicWorkOrderAdd	Used to create a Basic Work Order record. This component invokes the Inbound Web Service ATW1BasicWorkOrder using W1-BasicWorkOrder Business Object.
W1-BasicWorkOrderDelete	Used to delete an existing a Basic Work Order record. This component invokes the Inbound Web Service ATW1BasicWorkOrder using W1-BasicWorkOrder Business Object.
W1-BasicWorkOrderRead	Used to query an existing a Basic Work Order record. This component invokes the Inbound Web Service ATW1BasicWorkOrder using W1-BasicWorkOrder Business Object.
W1-BasicWorkOrderUpdate	Used to update an existing a Basic Work Order record. This component invokes the Inbound Web Service ATW1BasicWorkOrder using W1-BasicWorkOrder Business Object.
W1-CompnAssetListActGeneratorAdd	Used to create an Activity Generator - Component List record. This component invokes the Inbound Web Service ATW1CompnAssetListActGenerator using W1-CompnAssetListActGenerator Business Object.
W1-CompnAssetListActGeneratorDelete	Used to update an existing an Activity Generator - Component List record. This component invokes the Inbound Web Service ATW1CompnAssetListActGenerator using W1-CompnAssetListActGenerator Business Object.
W1-CompnAssetListActGeneratorRead	Used to query an existing an Activity Generator - Component List record. This component invokes the Inbound Web Service ATW1CompnAssetListActGenerator using W1-CompnAssetListActGenerator Business Object.
W1-CompnAssetListActGeneratorUpdate	Used to update an existing an Activity Generator - Component List record. This component invokes the Inbound Web Service ATW1CompnAssetListActGenerator using W1-CompnAssetListActGenerator Business Object.
W1-CompnCriteriaActGeneratorAdd	Used to create an Activity Generator - Component Criteria record. This component invokes the Inbound Web Service ATW1CompnCriteriaActGenerator using W1-CompnCriteriaActGenerator Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CompnCriteriaActGeneratorDelete	Used to delete an existing Activity Generator - Component Criteria record. This component invokes the Inbound Web Service ATW1CompnCriteriaActGenerator using W1-CompnCriteriaActGenerator Business Object.
W1-CompnCriteriaActGeneratorRead	Used to query an existing Activity Generator - Component Criteria record. This component invokes the Inbound Web Service ATW1CompnCriteriaActGenerator using W1-CompnCriteriaActGenerator Business Object.
W1-CompnCriteriaActGeneratorUpdate	Used to update an existing Activity Generator - Component Criteria record. This component invokes the Inbound Web Service ATW1CompnCriteriaActGenerator using W1-CompnCriteriaActGenerator Business Object.
W1-CrAnyServiceHistoryCmplEvtAdd	Used to creating a Completion Event record. This component invokes the Inbound Web Service ATW1CrAnyServiceHistoryCmplEvt using W1-CrAnyServiceHistoryCmplEvt Business Object.
W1-CrAnyServiceHistoryCmplEvtDelete	Used to delete a Completion Event record. This component invokes the Inbound Web Service ATW1CrAnyServiceHistoryCmplEvt using W1-CrAnyServiceHistoryCmplEvt Business Object.
W1-rAnyServiceHistoryCmplEvtRead	Used to query an existing Completion Event record. This component invokes the Inbound Web Service ATW1CrAnyServiceHistoryCmplEvt using W1-CrAnyServiceHistoryCmplEvt Business Object.
W1-CrAnyServiceHistoryCmplEvtUpdate	Used to update an existing Completion Event record. This component invokes the Inbound Web Service ATW1CrAnyServiceHistoryCmplEvt using W1-CrAnyServiceHistoryCmplEvt Business Object.
W1-CreActivityPayCmpEvtAdd	Used to create a Create Specific Activity Completion Event record. This component invokes the Inbound Web Service ATW1CreActivityPayCmpEvt using W1-CreActivityPayCmpEvt Business Object.
W1-CreActivityPayCmpEvtDelete	Used to delete an existing Create Specific Activity. Event record. This component invokes the Inbound Web Service ATW1CreActivityPayCmpEvt using W1-CreActivityPayCPayment Business Object.
W1-CreActivityPayCmpEvtRead	Used to query an existing Create Specific Activity. Event record. This component invokes the Inbound Web Service ATW1CreActivityPayCmpEvt using W1-CreActivityPayCPayment Business Object.
W1-CreActivityPayCmpEvtUpdate	Used to query an existing Create Specific Activity Event record. This component invokes the Inbound Web Service ATW1CreActivityPayCmpEvt using W1-CreActivityPayCPayment Business Object.
W1-CreAssetPayCmpEvtAdd	Used to Create Specific Asset Completion Event. This component invokes the Inbound Web Service ATW1CreAssetPayCmpEvt using W1-CreAssetPayCmpEvt Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CreAssetPayCmpEvtDelete	Used to delete an existing Specific Asset Completion Event record. This component invokes the Inbound Web Service ATW1CreAssetPayCmpEvt using W1-CreAssetPayCmpEvt Business Object.
W1-CreAssetPayCmpEvtRead	Used to query an existing Specific Asset Completion Event record. This component invokes the Inbound Web Service ATW1CreAssetPayCmpEvt using W1-CreAssetPayCmp Business Object.
W1-CreAssetPayCmpEvtUpdate	Used to query an existing Specific Asset Completion Event record. This component invokes the Inbound Web Service ATW1CreAssetPayCmpEvt using W1-CreAssetPayCmp Business Object.
W1-CreateMobileWOInboundCommAdd	Used to create a Mobile Work Order Inbound Communication record. This component invokes the Inbound Web Service ATW1CreateMobileWOInboundComm using W1-CreateMobileWOInboundComm Business Object.
W1-CreateMobileWOInboundCommDelete	Used to delete an existing Mobile Work Order Inbound Communication record. This component invokes the Inbound Web Service ATW1CreateMobileWOInboundComm using W1-CreateMobileWOInboundComm Business Object.
W1-CreateMobileWOInboundCommRead	Used to query existing Mobile Work Order Inbound Communication record.This component invokes the Inbound Web Service ATW1CreateMobileWOInboundComm using W1-CreateMobileWOInbound Business Object.
W1-CreateMobileWOInboundCommUpdate	Used to query existing Mobile Work Order Inbound Communication record. This component invokes the Inbound Web Service ATW1CreateMobileWOInboundComm using W1-CreateMobileWOInbound Business Object.
W1-CreNodeAttachCmpEvtAdd	Used to create a Location Attachment Completion Event record. This component invokes the Inbound Web Service ATW1CreNodeAttachCmpEvt using W1-CreNodeAttachCmpEvt Business Object.
W1-CreNodeAttachCmpEvtDelete	Used to delete an existing Location Attachment Completion Event record. This component invokes the Inbound Web Service ATW1CreNodeAttachCmpEvt using W1-CreNodeAttachCmpEvt Business Object.
W1-CreNodeAttachCmpEvtRead	Used to query an existing Location Attachment Completion Event record. This component invokes the Inbound Web Service ATW1CreNodeAttachCmpEvt using W1-CreNodeAttachCmpEvt Business Object.
W1-CreNodeAttachCmpEvtUpdate	Used to update an existing Location Attachment Completion Event record. This component invokes the Inbound Web Service ATW1CreNodeAttachCmpEvt using W1-CreNodeAttachCmpEvt Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CreServiceHistoryAttCmpEvAdd	Used to create a Service History Attachment Completion Event record. This component invokes the Inbound Web Service ATW1CreServiceHistoryAttCmpEvt using W1-CreServiceHistoryAttCmpEvt Business Object.
W1-CreServiceHistoryAttCmpEvtDelete	Used to delete an existing Service History Attachment Completion Event record. This component invokes the Inbound Web Service ATW1CreServiceHistoryAttCmpEvt using W1-CreServiceHistoryAttCmpEvt Business Object.
W1-CreServiceHistoryAttCmpEvtRead	Used to query an existing Service History Attachment Completion Event record. This component invokes the Inbound Web ServiceATW1CreServiceHistoryAttCmpEvt using W1-CreServiceHistoryAttCmpEvt Business Object.
W1-CreServiceHistoryAttCmpEvtUpdate	Used to update an existing Service History Attachment Completion Event record. This component invokes the Inbound Web Service ATW1CreServiceHistoryAttCmpEvt using W1-CreServiceHistoryAttCmpEvt Business Object.
W1-CreServiceHistoryPayCmpEvtAdd	Used to create a Specific Service History Completion Event record. This component invokes the Inbound Web Service ATW1CreServiceHistoryPayCmpEvt using W1-CreServiceHistoryPayCmpEvt Business Object.
W1-CreServiceHistoryPayCmpEvtDelete	Used to delete an existing Specific Service History Completion Event record. This component invokes the Inbound Web Service ATW1CreServiceHistoryPayCmpEvt using W1-CreServiceHistoryPayCmpEvt Business Object.
W1-CreServiceHistoryPayCmpEvtRead	Used to query an existing Specific Service History Completion Event record. This component invokes the Inbound Web Service ATW1CreServiceHistoryPayCmpEvt using W1-CreServiceHistoryPayCmpEvt Business Object.
W1-CreServiceHistoryPayCmpEvtUpdate	Used to update an existing Specific Service History Completion Event record. This component invokes the Inbound Web Service ATW1CreServiceHistoryPayCmpEvt using W1-CreServiceHistoryPayCmpEvt Business Object.
W1-CreSvcHistCmpEvtAdd	Used to Create Any Service History Completion Event (Online Only) record. This component invokes the Inbound Web Service ATW1CreSvcHistCmpEvt using W1-CreSvcHistCmpEvt Business Object.
W1-CreSvcHistCmpEvtDelete	Used to delete existing Create Any Service History Completion Event (Online Only) record. This component invokes the Inbound Web Service ATW1CreSvcHistCmpEvt using W1-CreSvcHistCmpEvt Business Object.
W1-CreSvcHistCmpEvtRead	Used to query an existing Create Any Service History Completion Event (Online Only) record. This component invokes the Inbound Web Service ATW1CreSvcHistCmpEvt using W1-CreSvcHistCmpEvt Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CreSvcHistCmpEvtUpdate	Used to update an existing Create Any Service History Completion Event (Online Only) record. This component invokes the Inbound Web Service ATW1CreSvcHistCmpEvt using W1-CreSvcHistCmpEvt Business Object.
W1-FollowUpSkippedAssetsCmpEvtAdd	Used to create a Follow-Up Skipped Assets Completion Event record. This component invokes the Inbound Web Service ATW1FollowUpSkippedAssetsCmpEvt using W1-FollowUpSkippedAssetsCmpEvt Business Object.
W1-FollowUpSkippedAssetsCmpEvtDelete	Used to delete an existing a Follow-Up Skipped As Completion Event record. This component invokes the Inbound Web Service ATW1FollowUpSkippedAssetsCmpEvt using W1-FollowUpSkippedAssetsCmpEvt Business Object.
W1-FollowUpSkippedAssetsCmpEvtRead	Used to query an existing a Follow-Up Skipped As Completion Event record. This component invokes the Inbound Web Service ATW1FollowUpSkippedAssetsCmpEvt W1-FollowUpSkippedAssetsCmpEvt Business Object.
W1-FollowUpSkippedAssetsCmpEvtUpdate	Used to update an existing a Follow-Up Skipped As Completion Event record. This component invokes the Inbound Web Service ATW1FollowUpSkippedAssetsCmpEvt using W1-FollowUpSkippedAssetsCmpEvBusiness Object.
W1-LocalActivityCoreAdd	Used to create a Local Activity Core record. This component invokes the Inbound Web Service ATW1LocalActivityCore using ATW1LocalActivityCore Business Object.
W1-LocalActivityCoreDelete	Used to delete an existing Local Activity Core record. This component invokes the Inbound Web Service ATW1LocalActivityCore using W1-LocalActivityCore Business Object.
W1-LocalActivityCoreRead	Used to query an existing Local Activity Core record. This component invokes the Inbound Web Service ATW1LocalActivityCore using W1-LocalActivityCore Business Object.
W1-LocalActivityCoreUpdate	Used to update an existing Local Activity Core record. This component invokes the Inbound Web Service ATW1LocalActivityCore using W1-LocalActivityCore Business Object.
W1-MobileUpdWorkedAssetCmpEvtAdd	Used to create a Mobile Update Worked Assets Completion Event record. This component invokes the Inbound Web Service ATW1MobileUpdWorkedAssetCmpEvt using W1-MobileUpdWorkedAssetCmpEvt Business Object.
W1-MobileUpdWorkedAssetCmpEvtDelete	Used to delete an existing Mobile Update Worked Assets Completion Event record. This component invokes the Inbound Web Service ATW1MobileUpdWorkedAssetCmpEvt using W1-MobileUpdWorkedAssetCmpEvt Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-MobileUpdWorkedAssetCmpEvtRead	Used to query an existing Mobile Update Worked Assets Completion Event record. This component invokes the Inbound Web Service ATW1MobileUpdWorkedAssetCmpEvt using W1-MobileUpdWorkedAssetCmpEvt Business Object.
W1-MobileUpdWorkedAssetCmpUpdate	Used to update an existing Mobile Update Worked Assets Completion Event record. This component invokes the Inbound Web Service ATW1MobileUpdWorkedAssetCmpEvt using W1-MobileUpdWorkedAssetCmpEvt Business Object.
W1-NodeCriteriaActGeneratorAdd	Used to create an Activity Generator - Node Criteria record. This component invokes the Inbound Web Service ATW1NodeCriteriaActGenerator using W1-NodeCriteriaActGenerator Business Object.
W1-NodeCriteriaActGeneratorDelete	Used to delete an existing Activity Generator - Node Criteria record. This component invokes the Inbound Web Service ATW1NodeCriteriaActGenerator using W1-NodeCriteriaActGenerator Business Object.
W1-NodeCriteriaActGeneratorRead	Used to query an existing Activity Generator - Node Criteria record. This component invokes the Inbound Web Service ATW1NodeCriteriaActGenerator using W1-NodeCriteriaActGenerator Business Object.
W1-NodeCriteriaActGeneratorUpdate	Used to delete an existing Activity Generator - Node Criteria record. This component invokes the Inbound Web Service ATW1NodeCriteriaActGenerator using W1-NodeCriteriaActGenerator Business Object.
W1-OutboundActivityCoreAdd	Used to create an Outbound Activity Core record. This component invokes the Inbound Web Service ATW1OutboundActivityCore using W1-OutboundActivityCore Business Object.
W1-OutboundActivityCoreDelete	Used to delete an existing Outbound Activity Core record. This component invokes the Inbound Web Service ATW1OutboundActivityCore using W1-OutboundActivityCore Business Object.
W1-OutboundActivityCoreRead	Used to query an existing Outbound Activity Core record. This component invokes the Inbound Web Service ATW1OutboundActivityCore W1-OutboundActivityCore Business Object.
W1-OutboundActivityCoreUpdate	Used to update an existing Outbound Activity Core record. This component invokes the Inbound Web Service ATW1OutboundActivityCore using W1-OutboundActivityCore Business Object.
W1-ReplaceAssetLocalAdd	Used to create a Replace Asset Local record. This component invokes the Inbound Web Service ATW1ReplaceAssetLocal using W1-ReplaceAssetLocal Business Object.
W1-ReplaceAssetLocalDelete	Used to delete an existing Replace Asset Local record. This component invokes the Inbound Web Service ATW1ReplaceAssetLocal using W1-ReplaceAssetLocal Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-ReplaceAssetLocalRead	Used to query an existing Replace Asset Local record. This component invokes the Inbound Web Service ATW1ReplaceAssetLocal using W1-ReplaceAssetLocal Business Object.
W1-ReplaceAssetLocalUpdate	Used to update an existing Replace Asset Local record. This component invokes the Inbound Web Service ATW1ReplaceAssetLocal using W1-ReplaceAssetLocal Business Object.
W1-ReplaceAssetOutboundAdd	Used to create a Replace Asset Outbound record. This component invokes the Inbound Web Service ATW1ReplaceAssetOutbound using W1-ReplaceAssetOutbound Business Object.
W1-ReplaceAssetOutboundDelete	Used to delete an existing a Replace Asset Outbound record. This component invokes the Inbound Web Service ATW1ReplaceAssetOutbound using W1-ReplaceAssetOutbound Business Object.
W1-ReplaceAssetOutboundRead	Used to query an existing a Replace Asset Outbound record. This component invokes the Inbound Web Service ATW1ReplaceAssetOutbound using W1-ReplaceAssetOutbound Business Object.
W1-ReplaceAssetOutboundUpdate	Used to update an existing a Replace Asset Outbound record. This component invokes the Inbound Web Service ATW1ReplaceAssetOutbound using W1-ReplaceAssetOutbound Business Object.
W1-SingleAssetCfgWOAdd	Used to create a Configuration - Single Asset record. This component invokes the Inbound Web Service ATW1SingleAssetCfgWO using W1-SingleAssetCfgWO Business Object.
W1-SingleAssetCfgWODelete	Used to delete an existing Configuration - Single Asset record. This component invokes the Inbound Web Service ATW1SingleAssetCfgWO using W1-SingleAssetCfgWO Business Object.
W1-SingleAssetCfgWORead	Used to query an existing Configuration - Single Asset record. This component invokes the Inbound Web Service ATW1SingleAssetCfgWO using W1-SingleAssetCfgWO Business Object.
W1-SingleAssetCfgWOUpdate	Used to update an existing Configuration - Single Asset record. This component invokes the Inbound Web Service ATW1SingleAssetCfgWO using W1-SingleAssetCfgWO Business Object.
W1-SOMActivityAdd	Used to create a SOM Activity record. This component invokes the Inbound Web Service ATW1SOMActivity using W1-SOMActivity Business Object.
W1-TrnAssetCmpEventAdd	Used to create a Transition Asset Completion Event record. This component invokes the Inbound Web Service ATW1TrnAssetCmpEvent using W1-TrnAssetCmpEvent Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-TrnAssetCmpEventDelete	Used to delete an existing Transition Asset Completion Event n Event record. This component invokes the Inbound Web Service ATW1TrnAssetCmpEvent using W1-TrnAssetCmpEvent Business Object.
W1-TrnAssetCmpEventRead	Used to query an existing Transition Asset Completion record. This component invokes the Inbound Web Service ATW1TrnAssetCmpEvent using W1-TrnAssetCmpEvent Business Object.
W1-TrnAssetCmpEventUpdate	Used to update an existing Transition Asset Completion record. This component invokes the Inbound Web Service ATW1TrnAssetCmpEvent using W1-TrnAssetCmpEvent Business Object.
W1-UpdAssetPayCmpEvtAdd	Used to create a Update Asset Using DA Completion Event record. This component invokes the Inbound Web Service ATW1UpdAssetPayCmpEvt using W1-UpdAssetPayCmpEvt Business Object.
W1-UpdAssetPayCmpEvtDelete	Used to delete an existing Update Asset Using DA Completion Event record. This component invokes the Inbound Web Service ATW1UpdAssetPayCmpEvt using W1-UpdAssetPayCmpEvt Business Object.
W1-UpdAssetPayCmpEvtRead	Used to query an existing Update Asset Using DA Completion Event record. This component invokes the Inbound Web Service ATW1UpdAssetPayCmpEvt using W1-UpdAssetPayCmpEvt Business Object.
W1-UpdAssetPayCmpEvtUpdate	Used to update an existing Update Asset Using DA Completion Event record. This component invokes the Inbound Web Service ATW1UpdAssetPayCmpEvt using W1-UpdAssetPayCmpEvt Business Object.
W1-UpdNodePayCmpEvtAdd	Used to create an Update Location Using DA Completion Event record. This component invokes the Inbound Web Service ATW1UpdNodePayCmpEvt using W1-UpdNodePayCmpEvt Business Object.
W1-UpdNodePayCmpEvtDelete	Used to delete an existing Update Location Using DA Completion Event record. This component invokes the Inbound Web Service ATW1UpdNodePayCmpEvt using W1-UpdNodePayCmpEvt Business Object.
W1-UpdNodePayCmpEvtRead	Used to query an existing Update Location Using DA Completion Event record. This component invokes the Inbound Web Service ATW1UpdNodePayCmpEvt using W1-UpdNodePayCmpEvt Business Object.
W1-UpdNodePayCmpEvtUpdate	Used to query an existing Update Location Using DA Completion Event record. This component invokes the Inbound Web Service ATW1UpdNodePayCmpEvt using W1-UpdNodePayCmpEvt Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-WorkOrderNotesAdd	Used to create a Work Order Notes record. This component invokes the Inbound Web Service ATW1WorkOrderNotes using W1-WorkOrderNotes Business Object.
W1-WorkOrderNotesDelete	Used to delete an existing Work Order Notes record. This component invokes the Inbound Web Service ATW1WorkOrderNotes using W1-WorkOrderNotes Business Object.
W1-WorkOrderNotesRead	Used to query an existing Work Order Notes record. This component invokes the Inbound Web Service ATW1WorkOrderNotes using W1-WorkOrderNotes Business Object.
W1-WorkOrderNotesUpdate	Used to update an existing Work Order Notes record. This component invokes the Inbound Web Service ATW1WorkOrderNotes using W1-WorkOrderNotes Business Object.
W2-AACCfgFirmwareUpgradeAdd	Used to create a Configuration - Firmware - Asset to Component record. This component invokes the Inbound Web Service ATW2AACCfgFirmwareUpgrade using W2-AACCfgFirmwareUpgrade Business Object.
W2-AACCfgFirmwareUpgradeDelete	Used to delete an existing Configuration - Firmware - Asset to Component record. This component invokes the Inbound Web Service ATW2AACCfgFirmwareUpgrade using W2-AACCfgFirmwareUpgrade Business Object.
W2-AACCfgFirmwareUpgradeRead	Used to query an existing Configuration - Firmware - Asset to Component record. This component invokes the Inbound Web Service ATW2AACCfgFirmwareUpgrade using W2-AACCfgFirmwareUpgrade Business Object.
W2-AACCfgFirmwareUpgradeUpdate	Used to update an existing Configuration - Firmware - Asset to Component record. This component invokes the Inbound Web Service ATW2AACCfgFirmwareUpgrade using W2-AACCfgFirmwareUpgrad Business Object.
W2-AACfgFirmwareUpgradeAdd	Used to create a Configuration - Firmware - Asset to Asset record. This component invokes the Inbound Web Service ATW2AACfgFirmwareUpgrade using W2-AACfgFirmwareUpgrade Business Object.
W2-AACfgFirmwareUpgradeDelete	Used to delete an existing Configuration - Firmware - Asset record. This component invokes the Inbound Web Service ATW2AACfgFirmwareUpgrade using W2-AACfgFirmwareUpgrade Business Object.
W2-AACfgFirmwareUpgradeRead	Used to query an existing Configuration - Firmware - Asset to Asset record. This component invokes the Inbound Web Service ATW2AACfgFirmwareUpgrade using W2-AACfgFirmwareUpgrade Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W2-AACfgFirmwareUpgradeUpdate	Used to update an existing Configuration - Firmware - Asset to Asset record. This component invokes the Inbound Web Service ATW2AACfgFirmwareUpgrade using W2-AACfgFirmwareUpgrade Business Object.
W2-ACACCfgFirmwareUpgradeAdd	Used to create a Configuration - Firmware - Component to Component record. This component invokes the Inbound Web Service ATW2ACACCfgFirmwareUpgrade using W2-ACACCfgFirmwareUpgrade Business Object.
W2-ACACCfgFirmwareUpgradeDelete	Used to delete an existing Configuration - Firmware - Component to Component record. This component invokes the Inbound Web Service ATW2ACACCfgFirmwareUpgrade using W2-ACACCfgFirmwareUpgrade Business Object.
W2-ACACCfgFirmwareUpgradeRead	Used to query an existing Configuration - Firmware - Component to Component record. This component invokes the Inbound Web Service ATW2ACACCfgFirmwareUpgrade using W2-ACACCfgFirmwareUpgrade Business Object.
W2-ACACCfgFirmwareUpgradeUpdate	Used to update an existing Configuration - Firmware Component to Component record. This component invokes the Inbound Web Service ATW2ACACCfgFirmwareUpgrade using W2-ACACCfgFirmwareUpgrade Business Object.
W2-ACACfgFirmwareUpgradeAdd	Used to create a Configuration - Firmware - Component to Asset record. This component invokes the Inbound Web Service ATW2ACACfgFirmwareUpgrade using W2-ACACfgFirmwareUpgrade Business Object.
W2-ACACfgFirmwareUpgradeDelete	Used to delete an existing Configuration - Firmware - Component to Asset record. This component invokes the Inbound Web Service ATW2ACACfgFirmwareUpgrade using W2-ACACfgFirmwareUpgrade Business Object.
W2-ACACfgFirmwareUpgradeRead	Used to query an existing Configuration - Firmware Component to Asset record. This component invokes the Inbound Web Service ATW2ACACfgFirmwareUpgrade using W2-ACACfgFirmwareUpgrade Business Object.
W2-ACACfgFirmwareUpgradeUpdate	Used to update an existing Configuration - Firmware Component to Asset record. This component invokes the Inbound Web Service ATW2ACACfgFirmwareUpgrade using W2-ACACfgFirmwareUpgrade Business Object.
W2-ACCfgFirmwareUpgradeAdd	Used to create Configuration - Firmware - Component record. This component invokes the Inbound Web Service ATW2ACCfgFirmwareUpgrade using W2-ACCfgFirmwareUpgrade Business Object.
W2-ACCfgFirmwareUpgradeDelete	Used to delete an existing Configuration - Firmware - Component record. This component invokes the Inbound Web Service ATW2ACCfgFirmwareUpgrade using W2-ACCfgFirmwareUpgrade Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W2-ACCfgFirmwareUpgradeRead	Used to query an existing Configuration - Firmware - Component record. This component invokes the Inbound Web Service ATW2ACCfgFirmwareUpgrade using W2-ACCfgFirmwareUpgrade Business Object.
W2-ACCfgFirmwareUpgradeUpdate	Used to update an existing Configuration - Firmware - Component record. This component invokes the Inbound Web Service ATW2ACCfgFirmwareUpgrade using W2-ACCfgFirmwareUpgrade Business Object.
W2-ACfgFirmwareUpgradeAdd	Used to create a Configuration - Firmware - Asset record. This component invokes the Inbound Web Service ATW2ACfgFirmwareUpgrade using W2-ACfgFirmwareUpgrade Business Object.
W2-ACfgFirmwareUpgradeDelete	Used to delete an existing Configuration - Firmware - Asset record. This component invokes the Inbound Web Service ATW2ACfgFirmwareUpgrade using W2-ACfgFirmwareUpgrade Business Object.
W2-ACfgFirmwareUpgradeRead	Used to query an existing Configuration - Firmware - Asset record. This component invokes the Inbound Web Service ATW2ACfgFirmwareUpgrade using W2-ACfgFirmwareUpgrade Business Object.
W2-ACfgFirmwareUpgradeUpdate	Used to update an existing Configuration - Firmware - Asset record. This component invokes the Inbound Web Service ATW2ACfgFirmwareUpgrade using W2-ACfgFirmwareUpgrade Business Object.
W2-FirmwareCommandLocalAdd	Used to create a Firmware Command Local record. This component invokes the Inbound Web Service ATW2FirmwareCommandLocal using W2-FirmwareCommandLocal Business Object.
W2-FirmwareCommandLocalDelete	Used to delete an existing Firmware Command Local record. This component invokes the Inbound Web Service ATW2FirmwareCommandLocal using W2-FirmwareCommandLocal Business Object.
W2-FirmwareCommandLocalRead	Used to query an existing Firmware Command Local record. This component invokes the Inbound Web Service ATW2FirmwareCommandLocal using W2-FirmwareCommandLocal Business Object.
W2-FirmwareCommandLocalUpdate	Used to update an existing Firmware Command Local record. This component invokes the Inbound Web Service ATW2FirmwareCommandLocal using W2-FirmwareCommandLocal Business Object.
W2-FirmwareCommandOutboundAdd	Used to create a Firmware Command Outbound record. This component invokes the Inbound Web Service ATW2FirmwareCommandOutbound using W2-FirmwareCommandOutbound Business Object.
W2-FirmwareCommandOutbound	Used to delete a Firmware Command Outbound record. This component invokes the Inbound Web Service ATW2FirmwareCommandOutbound using W2-FirmwareCommandOutbound Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W2-FirmwareCommandOutboundRead	Used to query an existing Firmware Command Outbound record. This component invokes the Inbound Web Service ATW2FirmwareCommandOutbound using W2-FirmwareCommandOutbound Business Object.
W2-FirmwareCommandOutboundUpdate	Used to update an existing Firmware Command Outbound record. This component invokes the Inbound Web Service ATW2FirmwareCommandOutbound using W2-FirmwareCommandOutbound Business Object.

Bill Determinants

Component	Description
D2-UsgTranSeeder	Used to perform actions such as ADD, READ, UPDATE, and DELETE a Usage Transaction Seeder. This component invokes the D2-UsgTranSeeder Business Object using the ATD2UsgTranSeeder Inbound Web Service.
D2-UsageTransaction	Used to perform actions such as ADD, READ, UPDATE, and DELETE a Usage Transaction. This component invokes the D2-UsageTransaction Business Object using the ATD2UsageTransaction Inbound Web Service.
D2-UsageSubscription	Used to create a Usage Subscription. This component invokes the D2-UsageSubscription Business Object using the ATD2UsageSubscription Inbound Web Service.
D2-TOUMap	Used to create a TOU Map. This component invokes the D2-TOUMap Business Object using the ATD2TOUMap Inbound Web Service.
D2-DynamicOption	Used to create a Dynamic Option. This component invokes the D2-DynamicOption Business Object using the ATD2DynamicOption Inbound Web Service.
D2-DynamicOptionEvent	Used to create a Dynamic Option Event. This component invokes the D2-DynamicOptionEvent Business Object using the ATD2DynamicOptionEvent Inbound Web Service.
D1-UsageGroup	Used to create a Usage Group This component invokes the D1-UsageGroup Business Object using the ATD1UsageGroup Inbound Web Service.
D2-GetScalar	Used to create a GetScalar Usage Rule. This component invokes the D2-GetScalar Business Object using the ATD2GetScalar Inbound Web Service.
D2-BaselineCalc	Used to create a BaselineCalc Usage Rule. This component invokes the D2-BaselineCalc Business Object using the ATD2BaselineCalc Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-DataSourceEntityGrpMDMSP	Used to create a DataSourceEntityGrpMDMSP. This component invokes the D1-DataSourceEntityGrpMDMSP Business Object using the ATD1DataSourceEntityGrpMDMSP IWS.
D1-DataSourceEntityGrpCtrlDvc	Used to create a DataSourceEntityGrpCtrlDvc. This component invokes the D1-DataSourceEntityGrpCtrlDvc Business Object using the ATD1DataSourceEntityGrpCtrlDvc IWS.
D1-CalcRollingDemandRule	Used to create a CalcRollingDemandRule. This component invokes the D1-CalcRollingDemandRule using the ATD1CalcRollingDemandRule IWS Inbound Web Service.
D1-CoincidentPeakSPDemandRule	Used to create a CoincidentPeakSPDemandRule. This component invokes the D1-CoincidentPeakSPDemandRule Business Object using the ATD1CoincidentPeakSPDemandRule.
D1-CoincidentPeakOperandLookup	Used to create a CoincidentPeakOperandLookup. This component invokes the D1-CoincidentPeakOperandLookup Business Object using the ATD1CoincidentPeakOperandLookup Inbound Web Service.
D2-GetTOUUsage	Used to create a GetTOUUsage Usage Rule. This component invokes the D2-GetTOUUsage Business Object using the ATD2GetTOUUsage Inbound Web Service.
D2-DynamicOptionType	Describes the creation of Dynamic Option Type. This component invokes the D2-DynamicOptionType Business Object using the ATD2DynamicOptionType Inbound Web Service.
D2-GetIntervalData	Allows the configuration of interval data retrieval during usage transaction processing. The rule records service quantities per service point and measuring component - which means that interval curves for different measuring components. This component invokes the D2-GetIntervalData Business Object using the ATD2GetIntervalData Inbound Web Service.
D2-Math	Allows the configuration of interval data retrieval during usage transaction processing. The rule records service quantities per service point and measuring component - which means that interval curves for different measuring components. This component invokes the D2-Math Business Object using the ATD2Math Inbound Web Service.
D2-UsageSubscriptionType	Allows to create a usage subscription type for creating a usage subscription. This component invokes the D2-UsageSubscriptionType Business Object using the ATD2UsageSubscriptionType Inbound Web Service.
D2-TOUMapType	Describes Time Of Use Map Type. This component invokes the D2-TOUMapType Business Object using the ATD2TOUMapType Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D2-HowToCreateUSInformation	Describes how to create the Usage Subscription related information. This component invokes the D2-HowToCreateUSInformation Business Object using the ATD2HowToCreateUSInformation Inbound Web Service.
D2-ApplyMathInt	Describes the structure and rules applicable to Apply Math (Interval Data) usage rule. This component invokes the D2-ApplyMathInt Business Object using the ATD2ApplyMathInt Inbound Web Service.
D1-FactorNumber	Describes the Factor Number. This component invokes the D1-FactorNumber Business Object using the ATD1FactorNumber Inbound Web Service.
D1-FactorProfile	Used to create a FactorProfile Factor Value. This component invokes the D1-FactorProfile Business Object using the ATD1FactorProfile Inbound Web Service.
D1-FactorVEEGroup	Used to create a FactorVEEGroup Factor. This component invokes the D1- FactorVEEGroup Business Object using the ATD1FactorVEEGroup Inbound Web Service.
D2-GetItemCountsConsumption	Used to create a GetItemCountsConsumption Usage Rule. This component invokes the D2-GetItemCountsConsumption Business Object using the ATD2GetItemCountsConsumption Inbound Web Service.
D2-TOUMapTemplate	Used to create a TOU Map Template. This component invokes the D2-TOUMapTemplate Business Object using the ATD2TOUMapTemplate Inbound Web Service.
D2-ValAgainstTol	Used to create a Validate Against Tolerance usage rule. This component invokes the D2-ValAgainstTol Business Object using the ATD2ValAgainstTol Inbound Web Service.
D1-FactorValueNumber	Used to create a Factor Value Number. This component invokes the D1-FactorValueNumber Business Object using the ATD1FactorValueNumber Inbound Web Service.
D1-FactorValueVEEGroup	Describes the Factor Value VEE Group. This component invokes the D1-FactorValueVEEGroup Business Object using the ATD1FactorValueVEEGroup Inbound Web Service.
D1-FactorValueProfile	Used to create a FactorValueProfile Factor. This component invokes the D1-FactorValueProfile Business Object using the ATD1FactorValueProfile Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Communication

Component	Description
D1-CutServiceForNonPaymentTypeAdd	Used to create a Cut Service for Non-Payment Typerecord. This component invokes theATD1CutServiceForNonPaymentType InboundWeb Service using D1-CutServiceForNonPaymentType Business Object.
D1-CutServiceForNonPaymentTypeDelete	Used to delete an existing Cut Service for Non-Payment Type record. This component invokes theATD1CutServiceForNonPaymentType InboundWeb Service using D1-CutServiceForNonPaymentType Business Object.
D1-CutServiceForNonPaymentTypeRead	Used to query an existing Cut Service for Non-Payment Type record. This component invokes theATD1CutServiceForNonPaymentType InboundWeb Service using D1-CutServiceForNonPaymentType Business Object.
D1-CutServiceForNonPaymentTypeUpdate	Used to update an existing Cut Service for Non-Payment Type record. This component invokes theATD1CutServiceForNonPaymentType InboundWeb Service using D1-CutServiceForNonPaymentType Business Object.
D1-DisableServiceTypeAdd	Used to create a Disable Service Type record. This component invokes theATD1DisableServiceType IWS using D1-DisableServiceType Business Object.
D1-DisableServiceTypeDelete	Used to delete an existing Disable Service Type record. This component invokes theATD1DisableServiceType IWS using D1-DisableServiceType Business Object.
D1-DisableServiceTypeRead	Used to query an existing Disable Service Type record. This component invokes theATD1DisableServiceType IWS using D1-DisableServiceType Business Object.
D1-DisableServiceTypeUpdate	Used to update an existing Disable Service Type record. This component invokes theATD1DisableServiceType IWS using D1-DisableServiceType Business Object.
D1-EnableServiceTypeAdd	Used to create an Enable Service Type record. This component invokes theATD1EnableServiceType IWS using D1-EnableServiceType Business Object.
D1-EnableServiceTypeDelete	Used to delete an existing Enable Service Type record. This component invokes theATD1EnableServiceType IWS using D1-EnableServiceType Business Object.
D1-EnableServiceTypeRead	Used to query an existing Enable Service Type record. This component invokes theATD1EnableServiceType IWS using D1-EnableServiceType Business Object.
D1-EnableServiceTypeUpdate	Used to update an existing Enable Service Type record. This component invokes theATD1EnableServiceType IWS using D1-EnableServiceType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-FieldActivityTypeAdd	Used to create a Field Activity Type record. This component invokes the ATD1FieldActivityType Inbound Web Service using D1-FieldActivityType Business Object.
D1-FieldActivityTypeDelete	Used to delete an existing Field Activity Type record. This component invokes theATD1FieldActivityType Inbound Web Service usingD1-FieldActivityType Business Object.
D1-FieldActivityTypeRead	Used to query an existing Field Activity Type record. This component invokes theATD1FieldActivityType Inbound Web Service usingD1-FieldActivityType Business Object.
D1-FieldActivityTypeUpdate	Used to update an existing Field Activity Type record. This component invokes theATD1FieldActivityType Inbound Web Service usingD1-FieldActivityType Business Object.
C1-PremiseTypeAdd	Used to create a Premise Type record. This component invokes the ATC1PremiseType Inbound Web Service using the C1-PremiseTypePhysicalBO business object.
C1-PremiseTypeDelete	Used to delete an existing Premise Type record. This component invokes the ATC1PremiseTypeInbound Web Service using the C1-PremiseTypePhysicalBO business object.
C1-PremiseTypeRead	Used to query an existing Premise Type record. This component invokes the ATC1PremiseTypeInbound Web Service using the C1-PremiseTypePhysicalBO business object.
C1-PremiseTypeUpdate	Used to update an existing Premise Type record. This component invokes the ATC1PremiseTypeInbound Web Service using the C1-PremiseTypePhysicalBO business object.
W1-AssetLocationTypeAdd	Used to create an Asset Location Type record. This component invokes theATW1AssetLocationType Inbound Web Serviceusing the W1-AssetLocationType business object.
W1-AssetLocationTypeDelete	Used to delete an existing Asset Location Type record. This component invokes theATW1AssetLocationType Inbound Web Serviceusing the W1-AssetLocationType business object.
W1-AssetLocationTypeRead	Used to query an existing Asset Location Type record. This component invokes theATW1AssetLocationType Inbound Web Serviceusing the W1-AssetLocationType business object.
W1-AssetLocationTypeUpdate	Used to update an existing Asset Location Type record. This component invokes theATW1AssetLocationType Inbound Web Serviceusing W1-AssetLocationType business object.
W1-AssetTypeAdd	Used to create an Asset Type record. This component invokes the ATW1AssetTypeInbound Web Service using the W1-AssetTypebusiness object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AssetTypeDelete	Used to delete an existing Asset Type record. This component invokes the ATW1AssetTypeInbound Web Service using the W1-AssetTypebusiness object.
W1-AssetTypeRead	Used to query an existing Asset Type record. This component invokes the ATW1AssetTypeInbound Web Service using the W1-AssetTypebusiness object.
W1-AssetTypeUpdate	Used to update an existing Asset Type record. This component invokes the ATW1AssetType Inbound Web Service using W1-AssetType business object.
W1-ContactTypeRead	Used to query an existing Contact Type record. This component invokes the ATW1ContactType Inbound Web Service using the W1-ContactType business object.
W1-ComponentTypeAdd	Used to create an Operational Device Component Type record. This component invokes the ATW1ComponentType Inbound Web Service using the W1-ComponentType business object.
W1-ComponentTypeDelete	Used to delete an existing Operational Device Component Type record. This component invokes the ATW1ComponentType Inbound Web Service using the W1-ComponentType business object.
W1-ComponentTypeRead	Used to query an existing Operational Device Component Type record. This component invokes theATW1ComponentType Inbound Web Service usingthe W1-ComponentType business object.
W1-ComponentTypeUpdate	Used to update an existing Operational Device Component Type record. This component invokes theATW1ComponentType Inbound Web Service usingW1-ComponentType business object.
W1-OrganizationAdd	Used to create an Organization record. This component invokes the ATW1OrganizationInbound Web Service using the W1-Organizationbusiness object.
W1-OrganizationDelete	Used to delete an existing Organization record. This component invokes the ATW1OrganizationInbound Web Service using the W1-Organizationbusiness object.
W1-OrganizationRead	Used to query an existing Organization record. This component invokes the ATW1OrganizationInbound Web Service using the W1-Organizationbusiness object.
W1-OrganizationUpdate	Used to update an existing Organization record. This component invokes the ATW1OrganizationInbound Web Service using W1-Organizationbusiness object.
W1-OrganizationTypeAdd	Used to create an Organization Type record. This component invokes theATW1OrganizationType Inbound Web Serviceusing the W1-OrganizationType business object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-OrganizationTypeDelete	Used to delete an existing Organization Type record. This component invokes theATW1OrganizationType Inbound Web Serviceusing the W1-OrganizationType business object.
W1-OrganizationTypeRead	Used to query an existing Organization Type record. This component invokes theATW1OrganizationType Inbound Web Serviceusing the W1-OrganizationType business object.
W1-OrganizationTypeUpdate	Used to update an existing Organization Type record. This component invokes theATW1OrganizationType Inbound Web Serviceusing W1-OrganizationType business object.
W1-ServiceHistoryAdd	Used to create an Operational Device Service History record. This component invokes the ATW1ServiceHistoryInbound Web Service using the W1-ServiceHistorybusiness object.
W1-ServiceHistoryDelete	Used to delete an existing Operational Device Service History record. This component invokes the ATW1ServiceHistoryInbound Web Service using the W1-ServiceHistorybusiness object.
W1-ServiceHistoryRead	Used to query an existing Operational Device Service History record. This component invokes the ATW1ServiceHistoryInbound Web Service using the W1-ServiceHistorybusiness object.
W1-ServiceHistoryUpdate	Used to update an existing Operational Device Service History record. This component invokes the ATW1ServiceHistoryInbound Web Service using W1-ServiceHistorybusiness object.
W1-StorageLocationAdd	Used to create an Out of Service Location record. This component invokes the ATW1StorageLocation Inbound Web Service using the W1-StorageLocation business object.
W1-StorageLocationDelete	Used to delete an existing Out of Service Location record. This component invokes the ATW1StorageLocation Inbound Web Service using the W1-StorageLocation business object.
W1-StorageLocationRead	Used to query an existing Out of Service Location record. This component invokes the ATW1StorageLocation Inbound Web Service using the W1-StorageLocation business object.
W1-StorageLocationUpdate	Used to update an existing Out of Service Location record. This component invokes the ATW1StorageLocation Inbound Web Service using W1-StorageLocation business object.
W1-StorageLocationTypeAdd	Used to create an Out of Service Location Type record. This component invokes the ATW1StorageLocationType Inbound Web Service using the W1-StorageLocationType business object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-StorageLocationTypeDelete	Used to delete an existing Out of Service Location Type record. This component invokes the ATW1StorageLocationType Inbound Web Serviceusing the W1-StorageLocationType business object.
W1-StorageLocationTypeRead	Used to query an existing Out of Service Location Type record. This component invokes the ATW1StorageLocationType Inbound Web Service using the W1-StorageLocationType business object.
W1-StorageLocationTypeUpdate	Used to update an existing Out of Service Location Type record. This component invokes theATW1StorageLocationType Inbound Web Serviceusing W1-StorageLocationType business object.
W2-ServicePointRead	Used to query an existing Service Point record. This component invokes the ATW2ServicePointInbound Web Service using the W2-ServicePointbusiness object.
W2-VehicleAdd	Used to create a Vehicle record. This component invokes the ATW2Vehicle Inbound Web Service using the W2-Vehicle business object.
W1-VehicleDelete	Used to delete an existing Vehicle record. This component invokes the ATW2Vehicle InboundWeb Service using the W2-Vehicle business object.
W1-VehicleRead	Used to query an existing Vehicle record. This component invokes the ATW2Vehicle InboundWeb Service using the W2-Vehicle business object.
W1-VehicleUpdate	Used to update an existing Vehicle record. This component invokes the ATW2Vehicle InboundWeb Service using W2-Vehicle business object.
X1-AssetLocationTypeAdd	Used to create a Service Point Type - ODM record. This component invokes theATX1AssetLocationType Inbound Web Serviceusing the X1-AssetLocationType business object.
X1-AssetLocationTypeDelete	Used to delete an existing Service Point Type - ODM record. This component invokes theATX1AssetLocationType Inbound Web Serviceusing the X1-AssetLocationType business object.
X1-AssetLocationTypeRead	Used to query an existing Service Point Type - ODM record. This component invokes theATX1AssetLocationType Inbound Web Serviceusing the X1-AssetLocationType business object.
X1-AssetLocationTypeUpdate	Used to update an existing Service Point Type - ODM record. This component invokes theATX1AssetLocationType Inbound Web Serviceusing X1-AssetLocationType business object.
X1-ServicePointTypeAdd	Used to create a Service Point Type - CCB record. This component invokes theATX1ServicePointType Inbound Web Service usingX1-ServicePointType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
X1-ServicePointTypeDelete	Used to delete an existing Service Point Type - CCB record. This component invokes theATX1ServicePointType Inbound Web Service usingX1-ServicePointType BO.
X1-ServicePointTypeRead	Used to query an existing Service Point Type - CCB record. This component invokes theATX1ServicePointType Inbound Web Service usingX1-ServicePointType BO.
X1-ServicePointTypeUpdate	Used to update an existing Service Point Type - CCB record. This component invokes theATX1ServicePointType Inbound Web Service usingX1-ServicePointType BO.
X1-ServiceTypeAdd	Used to create a Service Type - CCB record. This component invokes the ATX1ServiceType Inbound Web Service using X1-ServiceType BO.
X1-ServiceTypeDelete	Used to delete an existing Service Type - CCB record. This component invokes the ATX1ServiceTypeInbound Web Service using X1-ServiceType BO.
X1-ServiceTypeRead	Used to query an existing Service Type - CCB record. This component invokes the ATX1ServiceTypeInbound Web Service using X1-ServiceType BO.
X1-ServiceTypeUpdate	Used to update an existing Service Type - CCB record. This component invokes the ATX1ServiceTypeInbound Web Service using X1-ServiceType BO.
X1D-ServicePointTypeAdd	Used to create a Service Point Type - MDM record. This component invokes theATXD1ServicePointType Inbound Web Serviceusing X1D-ServicePointType BO.
X1D-ServicePointTypeDelete	Used to delete an existing Service Point Type - MDM record. This component invokes the ATXD1ServicePointType Inbound Web Service using X1D-ServicePointType BO.
X1D-ServicePointTypeRead	Used to query an existing Service Point Type - MDM record. This component invokes theATXD1ServicePointType Inbound Web Serviceusing X1D-ServicePointType BO.
X1D-ServicePointTypeUpdate	Used to update an existing Service Point Type - MDM record. This component invokes theATXD1ServicePointType Inbound Web Serviceusing X1D-ServicePointType BO.
D1-DeviceEventComRespTypeAdd	Used to create a Device Event Communication Response Type record. This component invokes the ATD1DeviceEventComRespType Inbound WebService using D1-DeviceEventComRespType BO.
D1-DeviceEventComRespTypeDel	Used to delete an existing Device Event Communication Response Type record. This component invokes the ATD1DeviceEventComRespType Inbound Web Service using D1-DeviceEventComRespType BO.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-DeviceEventComRespTypeRead	Used to query an existing Device Event Communication Response Type record. This component invokes the ATD1DeviceEventComRespType Inbound WebService using D1-DeviceEventComRespType BO.
D1-DeviceEventComRespTypeUpd	Used to update an existing Device Event Communication Response Type record. This component invokes theATD1DeviceEventComRespType Inbound WebService using D1-DeviceEventComRespType BO.
W1-AssetCompCfgRptAdd	Used to create a Component Config Report record. This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Serviceof ATW1AssetCompCfgRpt.
W1-AssetCompCfgRptDelete	Used to delete an existing Component Config Report record. This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Serviceof ATW1AssetCompCfgRpt.
W1-AssetCompCfgRptRead	Used to query an existing Component Config Report record. This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Serviceof ATW1AssetCompCfgRpt.
W1-AssetCompCfgRptUpdate	Used to update an existing Component Config Report record. This component invokes the Business Object W1-AssetCompCfgRpt using the Inbound Web Serviceof ATW1AssetCompCfgRpt.
W1-AssetCompConfigAdd	Used to create an Asset Component Config Report record. This component invokes theATW1AssetCompConfig Inbound Web Serviceusing W1-AssetCompConfig BO.
W1-AssetCompConfigDelete	Used to delete an Asset Component Config Report record. This component invokes theATW1AssetCompConfig Inbound Web Serviceusing W1-AssetCompConfig BO.
W1-AssetCompConfigRead	Used to query an Asset Component Config Report record. This component invokes theATW1AssetCompConfig Inbound Web Serviceusing W1-AssetCompConfig BO.
W1-AssetCompConfigUpdate	Used to query an Asset Component Config Report record. This component invokes theATW1AssetCompConfig Inbound Web Serviceusing W1-AssetCompConfig BO.
W1-AssetCompToAssetCompCfgRptAdd	Used to create an Asset Component to Asset Component Config Report record. This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt InboundWeb Service using W1-AssetCompToAssetCompCfgRpt BO.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AssetCompToAssetCompCfgRptDelete	Used to update an existing Asset Component to Asset Component Config Report record. This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt InboundWeb Service using W1-AssetCompToAssetCompCfgRpt BO.
W1-AssetCompToAssetCompCfgRptRead	Used to update an query Asset Component to Asset Component Config Report record. This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt InboundWeb Service using W1-AssetCompToAssetCompCfgRpt BO.
W1-AssetCompToAssetCompCfgRptUpdate	Used to delete an query Asset Component to Asset Component Config Report record. This component invokes the W1-ATW1AssetCompToAssetCompCfgRpt InboundWeb Service using W1-AssetCompToAssetCompCfgRpt BO.
W1-AssetCompToAssetConfigAdd	Used to create an Asset Component to Asset Config record. This component invokes theATW1AssetCompToAssetConfig Inbound WebService using W1-AssetCompToAssetConfig BO.
W1-AssetCompToAssetConfigDelete	Used to delete an existing Asset Component to Asset Config record. This component invokes theATW1AssetCompToAssetConfig Inbound WebService using W1-AssetCompToAssetConfig BO.
W1-AssetCompToAssetConfigRead	Used to update an existing Asset Component to Asset Config record. This component invokes theATW1AssetCompToAssetConfig Inbound WebService using W1-AssetCompToAssetConfig BO.
W1-AssetCompToAssetConfigUpdate	Used to update an existing Asset Component to Asset Component Config record. This component invokes theATW1AssetCompToAssetConfig Inbound WebService using W1-AssetCompToAssetConfig BO.
W1-AssetToAssetCompCfgRptAdd	Used to create an Asset to Asset Component Config Report record. This component invokes theATW1AssetToAssetCompCfgRpt Inbound WebService using W1-AssetToAssetCompCfgRpt BO.
W1-AssetToAssetCompCfgRptDelete	Used to delete an existing Asset to Asset Component Config Report record. This component invokes theATW1AssetToAssetCompCfgRpt Inbound WebService using W1-AssetToAssetCompCfgRpt BO.
W1-AssetToAssetCompCfgRptRead	Used to query an existing Asset to Asset Component Config Report record. This component invokes theATW1AssetToAssetCompCfgRpt Inbound WebService using W1-AssetToAssetCompCfgRpt BO.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AssetToAssetCompCfgRptUpdate	Used to update an existing Asset to Asset Component Config Report record. This component invokes theATW1AssetToAssetCompCfgRpt Inbound WebService using W1-AssetToAssetCompCfgRpt BO.
W1-AssetToAssetConfigAdd	Used to create an Asset to Asset record. This component invokes theATD8StatusChangedType Inbound Web Serviceusing D8-ReadOnDemandReadResultType BO.
W1-AssetToAssetConfigDelete	Used to delete an existing Asset to Asset record. This component invokes theATD8ReadOnDemandReadResultType InboundWeb Service using D8-StatusChangedType BO.
W1-AssetToAssetConfigUdpate	Used to update an existing Asset to Asset record. This component invokes theATD8StatusChangedType Inbound Web Serviceusing D8-StatusChangedType BO.
W1-ConfigTypeAdd	Used to create a Config Type record. This component invokes the ATW1ConfigTypeInbound Web Service using W1-ConfigType BO.
W1-ConfigTypeDelete	Used to delete an existing Config Type record. This component invokes the ATW1ConfigTypeInbound Web Service using W1-ConfigType BO.
W1-ConfigTypeRead	Used to query an existing Config Type record. This component invokes the ATW1ConfigTypeInbound Web Service using W1-ConfigType BO.
W1-ConfigTypeUpdate	Used to update an existing Config Type record. This component invokes the ATW1ConfigTypeInbound Web Service using W1-ConfigType BO.
W1-SingleAssetCfgRptAdd	Used to create a Single Asset Config Report record. This component invokes theATW1SingleAssetCfgRp Inbound Web Serviceusing W1-SingleAssetCfgRp BO.
W1-SingleAssetCfgRptDelete	Used to delete an existing Single Asset Config Report record. This component invokes theATW1SingleAssetCfgRp Inbound Web Serviceusing W1-SingleAssetCfgRp BO.
W1-SingleAssetCfgRptRead	Used to query an existing Single Asset Config Reportrecord. This component invokes theATW1SingleAssetCfgRp Inbound Web Serviceusing W1-SingleAssetCfgRp BO.
W1-SingleAssetCfgRptUdpate	Used to update an existing Single Asset Config Report record. This component invokes theATW1SingleAssetCfgRp Inbound Web Serviceusing W1-SingleAssetCfgRp BO.
W1-SingleAssetConfigAdd	Used to create a Single Asset Config record. This component invokes theATW1SingleAssetConfig Inbound Web Serviceusing W1-SingleAssetConfig BO.
W1-SingleAssetConfigDelete	Used to delete an existing Single Asset Configrecord. This component invokes theATW1SingleAssetConfig Inbound Web Serviceusing W1-SingleAssetConfig BO.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-ActivityCompletionEventTypeAdd	Used to create an Activity Completion Event Type record. This component invokes theATW1ActivityCompletionEventType Inbound WebService using W1-ActivityCompletionEventTypeBusiness Object.
W1-ActivityCompletionEventTypeDelete	Used to delete an existing Activity Completion Event Type record. This component invokes theATW1ActivityCompletionEventType Inbound WebService using W1-ActivityCompletionEventTypeBusiness Object.
W1-ActivityCompletionEventTypeRead	Used to query an existing Activity Completion Event Type record. This component invokes theATW1ActivityCompletionEventType Inbound WebService using W1-ActivityCompletionEventTypeBusiness Object.
W1-ActivityCompletionEventTypeUpdate	Used to update an existing Activity CompletionEvent Type record. This component invokes theATW1ActivityCompletionEventType Inbound WebService using W1-ActivityCompletionEventTypeBusiness Object.
W1-AssetDposCmpEvtTypeAdd	Used to create an Asset Disposition Completion Event Type record. This component invokes theATW1AssetDposCmpEvtType Inbound WebService using W1-AssetDposCmpEvtType BusinessObject.
W1-AssetDposCmpEvtTypeDelete	Used to delete an existing Asset Disposition Completion Event Type record. This component invokes theATW1AssetDposCmpEvtType Inbound WebService using W1-AssetDposCmpEvtType BusinessObject.
W1-AssetDposCmpEvtTypeRead	Used to query an existing Asset Disposition Completion Event Type record. This component invokes theATW1AssetDposCmpEvtType Inbound WebService using W1-AssetDposCmpEvtType BusinessObject.
W1-AssetDposCmpEvtTypeUpdate	Used to update an existing Asset Disposition Completion Event Type record. This component invokes theATW1AssetDposCmpEvtType Inbound WebService using W1-AssetDposCmpEvtType BusinessObject.
W1-BasicActivityTypeAdd	Used to create a Basic Activity Type record. This component invokes theATW1BasicActivityType Inbound Web Serviceusing W1-BasicActivityType Business Object.
W1-BasicActivityTypeDel	Used to delete an existing Basic Activity Type record. This component invokes theATW1BasicActivityTypeInbound Web Service usingW1-BasicActivityType Business Object.
W1-BasicActivityTypeRead	Used to query an existing Basic Activity Type record. This component invokes theATW1BasicActivityType Inbound Web Serviceusing W1-BasicActivityType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-BasicActivityTypeUpdate	Used to update an existing Basic Activity Type record. This component invokes theATW1BasicActivityType Inbound Web Serviceusing W1-BasicActivityType Business Object.
W1-DataAreaCmpEvtTypeAdd	Used to create Data Area Completion Event Type record. This component invokes theATW1DataAreaCmpEvtType Inbound Web Serviceusing W1-DataAreaCmpEvtType Business Object.
W1-DataAreaCmpEvtTypeDelete	Used to delete an existing Data Area Completion Event Type record. This component invokes theATW1DataAreaCmpEvtType Inbound Web Serviceusing W1-DataAreaCmpEvtType Business Object.
W1-DataAreaCmpEvtTypeRead	Used to query an existing Data Area CompletionEvent Type record. This component invokes theATW1DataAreaCmpEvtType Inbound Web Serviceusing W1-DataAreaCmpEvtType Business Object.
W1-DataAreaCmpEvtTypeUpdate	Used to update an existing Data Area CompletionEvent Type record. This component invokes theATW1DataAreaCmpEvtType Inbound Web Serviceusing W1-DataAreaCmpEvtType Business Object.
W1-GeneralCommunicationAdd	Used to create a General Inbound Communication Type record. This component invokes theATW1GeneralCommunicationType Inbound WebService using W1-GeneralCommunicationTypeBusiness Object.
W1-GeneralCommunicationDelete	Used to delete an existing General Inbound Communication Type record. This component invokes the ATW1GeneralCommunicationType Inbound Web Service using W1-GeneralCommunicationType Business Object.
W1-GeneralCommunicationRead	Used to query an existing General Inbound Communication Type record. This component invokes theATW1GeneralCommunicationType Inbound WebService using W1-GeneralCommunicationTypeBusiness Object.
W1-GeneralCommunicationUpdate	Used to update an existing General Inbound Communication Type record. This component invokes theATW1GeneralCommunicationType Inbound WebService using W1-GeneralCommunicationTypeBusiness Object.
W1-GeneralCompletionEventTypeAdd	Used to create General Completion Event Type record. This component invokes theATW1GeneralCompletionEventType Inbound WebService using W1-GeneralCompletionEventTypeBusiness Object.
W1-GeneralCompletionEventTypeDelete	Used to delete an existing General Completion Event Type record. This component invokes the ATW1GeneralCompletionEventType Inbound Web Service using W1-GeneralCompletionEventType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-GeneralCompletionEventTypeRead	Used to query an existing General Completion Event Type record. This component invokes theATW1GeneralCompletionEventType Inbound WebService using W1-GeneralCompletionEventTypeBusiness Object.
W1-GeneralCompletionEventTypeUpdate	Used to update an existing General CompletionEvent Type record. This component invokes theATW1GeneralCompletionEventType Inbound WebService using W1-GeneralCompletionEventTypeBusiness Object.
W1-ManufacturerAdd	Used to create a Manufacturer record. This component invokes the ATW1ManufacturerInbound Web Service using W1-ManufacturerBusiness Object.
W1-ManufacturerDelete	Used to delete an existing Manufacturer record. This component invokes the ATW1ManufacturerInbound Web Service using W1-ManufacturerBusiness Object.
W1-ManufacturerRead	Used to query an existing Manufacturer record. This component invokes the ATW1ManufacturerInbound Web Service using W1-ManufacturerBusiness Object.
W1-ManufacturerUpdate	Used to update an existing Manufacturer record. This component invokes the ATW1ManufacturerInbound Web Service using W1-ManufacturerBusiness Object.
W1-OutboundActivityTypeAdd	Used to create an Outbound Activity Type record. This component invokes the ATW1OutboundActivityType Inbound Web Serviceusing W1-OutboundActivityType Business Object.
W1-OutboundActivityTypeDelete	Used to delete an existing Outbound Activity Typerecord. This component invokes theATW1OutboundActivityType Inbound Web Serviceusing W1-OutboundActivityType Business Object.
W1-OutboundActivityTypeRead	Used to query an existing Outbound Activity Type record. This component invokes theATW1OutboundActivityType Inbound Web ServiceW1-OutboundActivityType Business Object.
W1-OutboundActivityTypeUpdate	Used to update an existing Outbound Activity Typerecord. This component invokes theATW1OutboundActivityType Inbound Web Serviceusing W1-OutboundActivityType Business Object.
W1-ReplicationComplEventTypeAdd	Used to create a Replication Completion Event Typerecord. This component invokes theATW1ReplicationComplEventType Inbound WebService using W1-ReplicationComplEventTypeBusiness Object.
W1-ReplicationComplEventTypeDelete	Used to delete an existing Replication Completion Event Type record. This component invokes theATW1ReplicationComplEventType Inbound WebService using W1-ReplicationComplEventTypeBusiness Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-ReplicationComplEventTypeRead	Used to query an existing Replication CompletionEvent Type record. This component invokes theATW1ReplicationComplEventType Inbound WebService using W1-ReplicationComplEventTypeBusiness Object.
W1-ReplicationComplEventTypeUpdate	Used to update an existing Replication CompletionEvent Type record. This component invokes theATW1ReplicationComplEventType Inbound WebService using W1-ReplicationComplEventTypeBusiness Object.
W1-ScheduledActivityTypeAdd	Used to create a Scheduled Activity Type record. This component invokes theATW1ScheduledActivityType Inbound Web Serviceusing W1-ScheduledActivityType Business Object.
W1-ScheduledActivityTypeDelete	Used to delete an existing Scheduled Activity Typerecord. This component invokes theATW1ScheduledActivityType Inbound Web Serviceusing W1-ScheduledActivityType Business Object.
W1-ScheduledActivityTypeRead	Used to query an existing Scheduled Activity Typerecord. This component invokes theATW1ScheduledActivityType Inbound Web ServiceW1-ScheduledActivityType Business Object.
W1-ScheduledActivityTypeUpdate	Used to update an existing Scheduled Activity Type record. This component invokes theATW1ScheduledActivityType Inbound Web Serviceusing W1-ScheduledActivityType Business Object.
W1-ServiceHistTypeCmpEvtTypeAdd	Used to create a Service History Completion EventType record. This component invokes the ATW1ServiceHistTypeCmpEvtTypeInbound WebService using W1-ServiceHistTypeCmpEvtTypeBusiness Object.
W1-ServiceHistTypeCmpEvtTypeDelete	Used to delete an existing Service History Completion Event Type record. This component invokes theATW1ServiceHistTypeCmpEvtTypeInbound WebService W1-ServiceHistTypeCmpEvtType BusinessObject.
W1-ServiceHistTypeCmpEvtTypeRead	Used to query an existing Service History Completion Event Type record. This component invokes theATW1ServiceHistTypeCmpEvtTypeInbound WebService W1-ServiceHistTypeCmpEvtType BusinessObject.
W1-ServiceHistTypeCmpEvtTypeUpdate	Used to update an existing Service History Completion Event Type record. This component invokes theATW1ServiceHistTypeCmpEvtType Inbound WebService using W1-ServiceHistTypeCmpEvtTypeBusiness Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-SvcHistFromActvCmplEvtTypeAdd	Used to create a Service History From Activity Completion Event Type record. This component invokes theATW1SvcHistFromActvCmplEvtType InboundWeb Service W1-SvcHistFromActvCmplEvtTypeBusiness Object.
W1-SvcHistFromActvCmplEvtTypeDelete	Used to delete an existing Service History From Activity Completion Event Type record. This component invokes theATW1SvcHistFromActvCmplEvtType InboundWeb Service W1-SvcHistFromActvCmplEvtTypeBusiness Object.
W1-SvcHistFromActvCmplEvtTypeRead	Used to query an existing Service History From Activity Completion Event Type record. This component invokes theATW1SvcHistFromActvCmplEvtType InboundWeb Service W1-SvcHistFromActvCmplEvtTypeBusiness Object.
W1-SvcHistFromActvCmplEvtTypeUpdate	Used to update an existing Service History From Activity Completion Event Type record. This component invokes theATW1SvcHistFromActvCmplEvtType InboundWeb Service W1-SvcHistFromActvCmplEvtTypeBusiness Object.
W1-SOMActivityTypeRead	Used to query a SOM Activity Type record. This component invokes theATW1SOMActivityType Inbound Web Serviceusing W1-SOMActivityType Business Object.
D2-SubIntAdjustmentVEE	Performs adjustments to consumption; the changes to consumption will be validated against the readingscontained prior to and subsequent to the change made. This component invokes the D2-SubIntAdjustmentVEE Business Object using theATD2SubIntAdjustmentVEE Inbound WebService.
D2-GetSubtractiveInterval	Allows the configuration of subtractive interval data retrieval during usage transaction processing. The rule records service quantities per service point and measuring component - which means that subtractive interval curves for different measuring components. This component invokes the D2-GetSubtractiveInterval Business Object using theATD2GetSubtractiveInterval Inbound Web Service.
D1-MeterReadDownloadActType	Used to create a MeterReadDownloadActType Activity Type. This component invokes the D1-MeterReadDownloadActType Business Object usingthe ATD1MeterReadDownloadActType InboundWeb Service.
D1-PairedEventLastDvcEvtType	Used to create a PairedEventLastDvcEvtType Device Event Type. This component invokes the D1-PairedEventLastDvcEvtType Business Object usingthe ATD1PairedEventLastDvcEvtType InboundWeb Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-StandardDeviceEventType	Used to create a StandardDeviceEventType Device Event Type. This component invokes the D1-StandardDeviceEventType Business Object usingthe ATD1StandardDeviceEventType Inbound WebService.
D1-UTCorrectnPrcessrActvtyType	Defines the activity BO to use in the creation of a Usage Transaction Correction Processor. This component also defines the general category of these activities as a Correction Processor. The component invokes the D1-UTCorrectnPrcessrActvtyType Business Objectusing the ATD1UTCorrectnPrcessrActvtyTypeInbound Web Service.
D1-RemoteConnectType	Describes configuration parameters required for the Remote Connect command activity, including automated retry and command time-out options. This component allows the definition of a Service Issue Monitor Type resulting in the creation of a Service Issue Monitor of the configured type if a Remote Connect command activity has failed. The component invokes the D1-RemoteConnectType Business Object using theATD1RemoteConnectType Inbound Web Service.
D1-PairedEventFirstDvcEvtType	Describes the Device Event Type - Paired Event (First). This component invokes the D1-PairedEventFirstDvcEvtType Business Object usingthe ATD1PairedEventFirstDvcEvtType InboundWeb Service.
D1-DeviceWithDurationActType	Describes the Device Activity with Duration Type. This component invokes the D1-DeviceWithDurationActType Business Object usingthe ATD1DeviceWithDurationActType InboundWeb Service.
D2-SubMeasurementAggType	Describes the Sub Measurement Aggregator Type. This component invokes the D2-SubMeasurementAggType Business Object using theATD2SubMeasurementAggType Inbound WebService.
D2-MasterMsrmtAggregatorType	Describes the Master Measurement Aggregator Type. This component invokes the D2-MasterMsrmtAggregatorType Business Object usingthe ATD2MasterMsrmtAggregatorType InboundWeb Service.
D2-ActivityTypeAggDimScanner	Describes the Aggregator Dimension Scanner Activity Type. This component invokes the D2-ActivityTypeAggDimScanner Business Object usingthe ATD2ActivityTypeAggDimScanner InboundWeb Service.
D2-AggregatorType	Used to create an AggregatorType Measuring Component Type. This component invokes the D2-AggregatorTypeBusiness Object using the ATD2AggregatorTypeInbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-IntervalPriceType	Used to create a IntervalPriceType. This component invokes the D1-IntervalPriceType Business Object using the ATD1IntervalPriceType Inbound Web Service.
D1-IntervalChannelTypePhysical	Used to create a IntervalChannelTypePhysical. This component invokes the D1-IntervalChannelTypePhysical Business Object usingthe ATD1IntervalChannelTypePhysical InboundWeb Service.
D1-MeasurementCycleSchedule	Used to create a MeasurementCycleSchedule. This component invokes the D1-MeasurementCycleSchedule Business Object usingthe ATD1MeasurementCycleSchedule Inbound WebService.
D1-ReaderRemarkType	Used to create a ReaderRemarkType. This component invokes the D1-ReaderRemarkTypeBusiness Object using the ATD1ReaderRemarkTypeInbound Web Service.
D1-ServiceIssueMonitorType	Used to create a ServiceIssueMonitorType. This component invokes the D1-ServiceIssueMonitorType Business Object using theATD1ServiceIssueMonitorType Inbound WebService.
D2-MsrmtQuantityAggScannerType	Used to create a MsrmtQuantityAggScannerType. This component invokes the D2-MsrmtQuantityAggScannerType Business Objectusing the ATD2MsrmtQuantityAggScannerTypeInbound Web Service.
D2-TOUGroup	Used to create a TOUGroup. This component invokes the D2-TOUGroup Business Object using the ATD2TOUGroup Inbound Web Service.
D2-VEERuleHighLowCheck	Used to create a VEERuleHighLowCheck. This component invokes the D2-VEERuleHighLowCheck Business Object using theATD2VEERuleHighLowCheck Inbound WebService.
D1-HowToCreateMCInformation	Used to create a HowToCreateMCInformation. This component invokes the D1-HowToCreateMCInformation Business Objectusing the ATD1HowToCreateMCInformationInbound Web Service.
D1-HowToSendActivityResponse	Used to create a HowToSendActivityResponse. This component invokes the D1-HowToSendActivityResponse Business Object usingthe ATD1HowToSendActivityResponse InboundWeb Service.
D1-AvgDailyEstItemConsumption	Used to create a AvgDailyEstItemConsumption. This component invokes the D1-AvgDailyEstItemConsumption Business Objectusing the ATD1AvgDailyEstItemConsumptionInbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-VEEEligibilityCriteria	Used to create a VEEEligibilityCriteria. This component invokes the D1-VEEEligibilityCriteria Business Object using theATD1VEEEligibilityCriteria Inbound Web Service.
D2-VerifyUomTouSqiMCExistForUs	Used to create a VerifyUomTouSqiMCExistForUs. This component invokes the D2-VerifyUomTouSqiMCExistForUs Business Objectusing the ATD2VerifyUomTouSqiMCExistForUsInbound Web Service.
D1-DeviceEventSeeder	Used to create a DeviceEventSeeder. This component invokes the D1-DeviceEventSeederBusiness Object using the ATD1DeviceEventSeederInbound Web Service.
D1-FieldActivity	Used to create a FieldActivity. This component invokes the D1-FieldActivityBusiness Object using the ATD1FieldActivityInbound Web Service.
D1-ReaderRemark	Used to create a ReaderRemark. This component invokes the D1-ReaderRemarkBusiness Object using the ATD1ReaderRemarkInbound Web Service.
D1-TimeZoneTranslationLookup	Used to create a TimeZoneTranslationLookup. This component invokes the D1-ATD1TimeZoneTranslationLookup BusinessObject using the ATD1ReaderRemark Inbound WebService.
D2-UsageCalculationGroupLookup	Used to create a UsageCalculationGroupLookup. This component invokes the D2-UsageCalculationGroupLookup Business Objectusing the ATD2UsageCalculationGroupLookupInbound Web Service.
D2-MDMMasterConfig	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig. This component invokes the D2-MDMMasterConfig Business Object using theATD2MDMMasterConfig Inbound Web Service.
D2-MDMMasterConfig	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig. This component invokes the D2-MDMMasterConfig Business Object using theATD2MDMMasterConfig Inbound Web Service.
D2-MtrCommTrckngAggregatorType	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MtrCommTrckngAggregatorType. This component invokes the D2-MtrCommTrckngAggregatorType Business Objectusing the ATD2MtrCommTrckngAggregatorTypeInbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-EstimationSuppressionType	Used to perform actions such as ADD, READ, UPDATE, and DELETE a EstimationSuppressionType. This component invokes the D1-EstimationSuppressionType Business Object usingthe ATD1EstimationSuppressionType InboundWeb Service.
D2-InactiveMeasurementCheck	Used to perform actions such as ADD, READ, UPDATE, and DELETE a InactiveMeasurementCheck VEE Rule. This component invokes the D1-InactiveMeasurementCheck Business Object usingthe ATD2InactiveMeasurementCheck Inbound WebService.
D1-ChannelStatisticsType	Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatisticsType. This component invokes the D1-ChannelStatisticsType Business Object using theATD1ChannelStatisticsType Inbound Web Service.
D1-ChannelStatistics	Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatistics. This component invokes the D1-ChannelStatisticsBusiness Object using the ATD1ChannelStatisticsInbound Web Service.
D1-FacilityLite	Used to perform actions such as ADD, READ, UPDATE, and DELETE a FacilityLite. This component invokes the D1- FacilityLiteBusiness Object using the ATD1FacilityLiteInbound Web Service.
D1-SpecificationLookup	Used to perform actions such as ADD, READ, UPDATE, and DELETE a SpecificationLookup. This component invokes the D1-SpecificationLookup Business Object using theATD1SpecificationLookup Inbound Web Service.
D1-MeasuringCompTypLite	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MeasuringCompTypLite. This component invokes the D1-MeasuringCompTypLite Business Object using theATD1MeasuringCompTypLite Inbound WebService.
D1-GetDvcFrmIdenTypFlag	Used to retrieve Device ID By Identifier and Type Flag using the ATD1 GetDvcFrmIdenTypFlag Inbound Web Service.
D1-GetSimdIdFromImd	Used to retrieve Simd ID By IMD ID using the ATD1GetSimdIdFromImd Inbound Web Service.
D1-GetMCFrmDvcExtId	Used to retrieve Measuring Component ID from Device External ID using the ATD1GetMCFrmDvcExtId Inbound Web Service.
D1-GetProductKeyFromSync	Used to Get Product Key from Sync Request ID using the ATD1 GetProductKeyFromSync Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-GetUsageFromExtID	Used to retrieve Usage ID from CCB Usage ID using the ATD1 GetUsageFromExtID Inbound Web Service.
D2-GetUSFromExtID	Used to retrieve US ID from External ID using the ATD1 GetUSFromExtID Inbound Web Service.
D1-GetDCFrmDvcExtId	Used to retrieve DC ID from External ID using the ATD1GetDCFrmDvcExtId Inbound Web Service.
D1-GetInstEvtFromDvcExId	Used to retrieve Install Event ID from Device External ID using ATD1GetInstEvtFromDvcExId Inbound Web Service.
D1-GetInstEvtFrmSPExtId	Used to retrieve Install Event ID from Service Point External ID using the ATD1GetInstEvtFrmSPExtId Inbound Web Service.
D1-GetMCFromExtID	Used to retrieve Measuring Component ID from External ID using the ATD1GetMCFromExtID Inbound Web Service.
D1-GetContactFromExtID	Used to retrieve Contact ID from External ID using the ATD1GetContactFromExtID Inbound Web Service.
D1-GetSpFromExtID	Used to retrieve Service Point ID from External ID using the ATD1GetSpFromExtID Inbound Web Service.
D1-GetSyncReqIdFrmExtId	Used to retrieve Sync Request ID from External ID using the ATD1GetSyncReqIdFrmExtId InboundWeb Service.

Construction Work Management

Component	Description
W1-ActivityReconciliation	Used to create, update, read, or delete ActivityReconciliation in the WAM application. This component calls the W1-ActivityReconciliation business object using the ATW1ActivityReconciliation Inbound Web Service.
W1-RTNCSVCCL	Used to read RTNCSVCCL in the WAM application. This component calls the W1-RTNCSVCCL business service using the Inbound Web Service.
W1-RTASSETCU	Used to read RTASSETCU in the WAM application. This component calls the W1-RTASSETCU business service using the Inbound Web Service.
W1-ConstructionLoc	Used to create, update, read, or delete Construction Location in the WAM application. This component calls the W1-Construction Location business object using the ATW1ConstructionLocation Inbound Web Service.
W1-ConstructionWorkActivity	Used to create, update, read, or delete ConstructionWorkActivity in the WAM application. This component calls the W1-ConstructionWorkActivity business object using the ATW1ConstructionWorkActivity Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-TmplConstructionActivity	Used to create, update, read, or delete Template ConstructionWorkActivity in the WAM application. This component calls the W1-TmplConstructionActivity business object using the ATW1TmplConstructionActivity Inbound Web Service.
W1-ConstructionWorkOrder	Used to create, update, read, or delete ConstructionWorkOrder in the WAM application. This component calls the W1-ConstructionWorkOrder business object using the ATW1ConstructionWorkActivity Inbound Web Service.
W1-TmplConstructionWorkOrder	Used to create, update, read, or delete Template Construction Work Order in the WAM application. This component calls the W1-TmplConstructionWorkOrder business object using ATW1TmplConstructionWorkOrder inbound web service.
W1-ConstrWorkActivityType	Used to create, update, read, or delete ConstrWorkActivityType in the WAM application. This component calls the W1-ConstrWorkActivityType business object using the ATW1ConstrWorkActivityType Inbound Web Service.
W1-ContractorBid	Used to create, update, read, or delete ContractorBid in the WAM application. This component calls the W1-ContractorBid business object using the ATW1ContractorBid Inbound Web Service.
W1-ContractorBidNotes	Used to create, update, read, or delete ContractorBidNotes in the WAM application. This component calls the W1-ContractorBidNotes business object using the ATW1ContractorBidNotes Inbound Web Service.
W1-ContractorBidRefAttachments	Used to create, update, read, or delete ContractorBidRefAttachments in the WAM application. This component calls the W1-ContractorBidRefAttachments business object using the ATW1ContractorBidRefAttachments Inbound Web Service.
W1-CrewTypeCUEquipmentProfile	Used to create, update, read, or delete CrewTypeCUEquipmentProfile in the WAM application. This component calls the W1-CrewTypeCUEquipmentProfile business object using the ATW1CrewTypeCUEquipmentProfile Inbound Web Service.
W1-CrewTypeCULaborProfile	Used to create, update, read, or delete CrewTypeCULaborProfile in the WAM application. This component calls the W1-CrewTypeCULaborProfile business object using the ATW1CrewTypeCULaborProfile Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CrewTypeCUProfile	Used to create, update, read, or delete CrewTypeCUProfile in the WAM application. This component calls the W1- CrewTypeCUProfile business object using the ATW1CrewTypeCUProfile Inbound Web Service.
W1-CU	Used to create, update, read, or delete Compatibility Unit in the WAM application. This component calls the W1- CU business object using the ATW1CU Inbound Web Service.
W1-CUCategory	Used to create, update, read, or delete CUCategory in the WAM application. This component calls the W1- CUCategory business object using the ATW1CUCategory Inbound Web Service.
W1-CULaborAndEquipment	Used to create, update, read, or delete CULaborAndEquipment in the WAM application. This component calls the W1-CULaborAndEquipment business object using the ATW1CULaborAndEquipment Inbound Web Service.
W1-CUMaterialResources	Used to create, update, read, or delete CUMaterialResources in the WAM application. This component calls the W1- CUMaterialResources business object using the ATW1CUMaterialResources Inbound Web Service.
W1-CUMaterialsForRemoval	Used to create, update, read, or delete CUMaterialsForRemoval in the WAM application. This component calls the W1-CUMaterialsForRemoval business object using the ATW1CUMaterialsForRemoval Inbound Web Service.
W1-CUNotes	Used to create, update, read, or delete CUNotes in the WAM application. This component calls the W1- CUNotes business object using the ATW1CUNotes Inbound Web Service.
W1-CURefAttachments	Used to create, update, read, or delete CURefAttachments in the WAM application. This component calls the W1-CURefAttachments business object using the ATW1CURefAttachments Inbound Web Service.
W1-CompatibleUnitSet	Used to create, update, read, or delete CUSET in the WAM application. This component calls the W1- CUSET business object using the ATW1CUSET Inbound Web Service.
W1-CUSetNotes	Used to create, update, read, or delete CUSetNotes in the WAM application. This component calls the W1- CUSetNotes business object using the ATW1CUSetNotes Inbound Web Service.
W1-CUSetRefAttachments	Used to create, update, read, or delete CUSetRefAttachments in the WAM application. This component calls the W1-CUSetRefAttachments business object using the ATW1CUSetRefAttachments Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CUUsage	Used to create, update, read, or delete CUUsage in the WAM application. This component calls the W1- CUUsage business object using the ATW1CUUsage Inbound Web Service.
W1-DeleteGeneralProcessRecord	Used to read DeleteGeneralProcessRecord in the WAM application. This component calls the W1-DeleteGeneralProcessRecord business service using the ATW1DeleteGeneralProcessRecord Inbound Web Service.
W1-DesignElement	Used to create, update, read, or delete DesignElement in the WAM application. This component calls the W1-DesignElement business object using the ATW1DesignElement Inbound Web Service.
W1-DesignElementCU	Used to create, update, read, or delete DesignElementCU in the WAM application. This component calls the W1-DesignElementCU business object using the ATW1DesignElementCU Inbound Web Service.
W1-DesignElementItems	Used to create, update, read, or delete DesignElementItems in the WAM application. This component calls the W1- DesignElementItems business object using the ATW1DesignElementItems Inbound Web Service.
W1-EquipmentGroup	Used to create, update, read, or delete EquipmentGroup in the WAM application. This component calls the W1- EquipmentGroup business object using the ATW1EquipmentGroup Inbound Web Service.
W1-Overhead	Used to create, update, read, or delete Overhead in the WAM application. This component calls the W1- Overhead business object using the ATW1Overhead Inbound Web Service.
W1-PropUnit	Used to create, update, read, or delete Property Unit in the WAM application. This component calls the W1-PropUnit object using the ATW1PropUnit Inbound Web Service.
W1-PropUnitBundlingAddBO	Used to create, update, read, or delete Property Unit Bundling in the WAM application. This component calls the W1-PropUnitBundlingAddBO object using the ATW1PropUnitBundlingAddBO Inbound Web Service.
W1-PropUnitPhysicalBO	Used to create, update, read, or delete Property Unit physical in the WAM application. This component calls the W1- PropUnitPhysicalBO object using the ATW1PropUnitPhysicalBO Inbound Web Service.
W1-RETCLCUCC	Used to read/retrieve Construction Location Expanded CU/Cost Center in the WAM application. This component calls the W1-RETCLCUCC business service using the ATW1RETCLCUCC Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-RETCUHIER	Used to read/retrieve CU Hierarchy in the WAM application. This component calls the W1-RETCUHIER business service using the ATW1RETCUHIER Inbound Web Service.
W1-RETCURESO	Used to read/retrieve CU Resources in the WAM application. This component calls the W1-RETCURESO business service using the ATW1RETCURESO Inbound Web Service.
W1-RETDEHIER	Used to read/retrieve Design Element Hierarchy in the WAM application. This component calls the W1-RETDEHIER business service using the ATW1RETDEHIER Inbound Web Service.
W1-RETREFCU	Used to read/retrieve Referencing CU with Property Unit in the WAM application. This component calls the W1-RETREFCU business service using the ATW1RETREFCU Inbound Web Service.
W1-RETREFDCU	Used to read/retrieve Referencing CU with Property Unit in the WAM application. This component calls the W1-RETREFCU business service using the ATW1RETREFCU Inbound Web Service.
W1-RETWDDE	Used to read/retrieve Design in the WAM application. This component calls the W1-RETWDDE business service using the ATW1RETWDDE Inbound Web Service.
W1-RNCACTRRQ	Used to read/retrieve Non-Cancelled Activity Resource Requirement for Resource Type/Stock Item in the WAM application. This component calls the W1- RNCACTRRQ business service using the ATW1RNCACTRRQ Inbound Web Service.
W1-RSTITAUPR	Used to read/retrieve Stock Item Average Unit Price in the WAM application. This component calls the W1-RSTITAUPR business service using the ATW1RSTITAUPR Inbound Web Service.
W1-RTACONLAS	Used to read/retrieve Activity Construction Location Assets in the WAM application. This component calls the W1-RTACONLAS business service using the ATW1RTACONLAS Inbound Web Service.
W1-RTACTACGL	Used to read/retrieve Activity Actual Cost Grouped by GL Entry in the WAM application. This component calls the W1-RTACTACGL business service using the ATW1RTACTACGL Inbound Web Service.
W1-RTACTACRC	Used to read/retrieve Activity Actual Cost Grouped by GL Entry in the WAM application. This component calls the W1-RTACTACRC business service using the ATW1RTACTACRC Inbound Web Service.
W1-RTACTRCON	Used to read/retrieve Activity Reconciliation for an Activity in the WAM application. This component calls the W1-RTACTRCON business service using the ATW1RTACTRCON Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-RTCBASTPU	Used to read/retrieve Contributed Asset Property Unit in the WAM application. This component calls the W1-RTCBASTPU business service using the ATW1RTCBASTPU Inbound Web Service.
W1-RTCCCUUSG	Used to read/retrieve Cost Center for Usage in the WAM application. This component calls the W1-RTCCCUUSG business service using the ATW1RTCCCUUSG Inbound Web Service.
W1-RTCNASTPU	Used to read/retrieve Constructed Asset for a Property Unit in the WAM application. This component calls the W1- RTCNASTPU business service using the ATW1RTCNASTPU Inbound Web Service.
W1-RTCONLACU	Used to read/retrieve Construction Location Applicable CU's in the WAM application. This component calls the W1- RTCONLACU business service using the ATW1RTCONLACU Inbound Web Service.
W1-RTCRACTTY	Used to read/retrieve Construction Related Activity Types in the WAM application. This component calls the W1-RTCRACTTY business service using the ATW1RTCRACTTY Inbound Web Service.
W1-RTCUSTCU	Used to read/retrieve CU Set CU's in the WAM application. This component calls the W1-RTCUSTCU business service using the ATW1RTCUSTCU Inbound Web Service.
W1-RTEASTISD	Used to read/Retrieve Earliest Asset In Service Date in the WAM application. This component calls the W1- RTEASTISD business service using the ATW1RTEASTISD Inbound Web Service.
W1-RTNFODCDT	Used to read/retrieve Non-Final ODC Details in the WAM application. This component calls the W1-RTNFODCDT business service using the ATW1RTNFODCDT Inbound Web Service.
W1-RTNFTSDTL	Used to read/retrieve Non-Final Timesheet Details in the WAM application. This component calls the W1-RTNFTSDTL business service using the ATW1RTNFTSDTL Inbound Web Service.
W1-RTNFWOACT	Used to read/retrieve Non-Final Non-Overhead Activities in the WAM application. This component calls the W1- RTNFWOACT business service using the ATW1RTNFWOACT Inbound Web Service.
W1-RTPRCPAST	Used to read/retrieve Pre-Capitalized Assets in the WAM application. This component calls the W1-RTPRCPAST business service using the ATW1RTPRCPAST Inbound Web Service.
W1-RTVLTASTY	Used to read/retrieve Valid Location Type for Asset Type in the WAM application. This component calls the W1- RTVLTASTY business service using the ATW1RTVLTASTY Inbound Web Service.
W1-WDRefAttachments	Used to create, update, read, or delete Work Design RefAttachments in the WAM application. This component calls the W1-WDRefAttachments object using the ATW1WDRefAttachments Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-WorkDesign	Used to create, update, read, or delete Work Design in the WAM application. This component calls the W1-WorkDesign object using the ATW1WorkDesign Inbound Web Service.
W1-WorkDesignNotes	Used to create, update, read, or delete WorkDesignNotes in the WAM application. This component calls the W1-WorkDesignNotes object using the ATW1WorkDesignNotes Inbound Web Service.
W1-CWM-RetriveReconID	Used to read/retrieving Activity Reconcilition ID from Activity in the WAM application. This component calls the ATW1RTARID business service using the ATW1RTARID Inbound Web Service.
W1-DTOHCSTSQL	Used to read/retrieve Direct Overhead Cost for Activity in the WAM application. This component calls the CM-DTOHCST business service using the ATW1DTOHCST Inbound Web Service.
W1- IDTOHCSTSQL	Used to read/retrieve InDirect Overhead cost for the activity in the WAM Application. This component calls the CM-IDTOHCST business service using the ATW1IDTOHCST Inbound Web Service.
W1-CUAccessory	Used to create, update, read, or delete Accessory CU in the WAM application. This component calls the W1-CUAccessory object using the ATW1CUAccessory Inbound Web Service.
W1-CUFunction	Used to create, update, read, or delete Functional CU in the WAM application. This component calls the W1-CUFunction object using the ATW1CUFunction Inbound Web Service.

Customer Information

Component	Description
C1-AccountAdd	Used to create an Account record. This component invokes the ATC1Account Inbound Web Service using the C1AccountPhysical Business Object.
C1-AccountUpdate	Used to update an existing Account record. This component invokes the ATC1Account Inbound Web Service using the C1AccountPhysical Business Object.
C1-AccountDelete	Used to delete an existing Account record. This component invokes the ATC1Account Inbound Web Service using the C1AccountPhysical Business Object.
C1-AccountRead	Used to read an existing Account record. This component invokes the ATC1Account Inbound Web Service using the C1AccountPhysical Business Object.
C1-CaseBOAdd	Used to create a Case record. This component invokes the ATC1CaseBO Inbound Web Service using the C1-Case Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-CaseBOUpdate	Used to update an existing Case record. This component invokes the ATC1CaseBO Inbound Web Service using the C1-Case Business Object.
C1-CaseBORead	Used to read an existing Case record. This component invokes the ATC1CaseBO Inbound Web Service using the C1-Case Business Object.
C1-AccountBSRead	Used to read an existing Account record. This component invokes the ATC1AccountBS Inbound Web Service using the C1-AccountRead Business Service.
C1-AccountBSUpdate	Used to update an existing Account record. This component invokes the ATC1AccountBS Inbound Web Service using the C1-AccountUpdate Business Service.
C1-ContractOptionAdd	Used to create a Contract Option record. This component invokes the ATC1ContractOption Inbound Web Service using the C1ContractOptionPhysical Business Object.
C1-ContractOptionDelete	Used to delete an existing Contract Option record. This component invokes the ATC1ContractOption Inbound Web Service using the C1ContractOptionPhysical Business Object.
C1-ContractOptionUpdate	Used to update (Update, Freeze and Cancel) an existing Contract Option record. This component invokes the ATC1ContractOption Inbound Web Service using the C1ContractOptionPhysical Business Object.
C1-ContractOptionRead	Used to read an existing Contract Option record. This component invokes the ATC1ContractOption Inbound Web Service using the C1ContractOptionPhysical Business Object.
C1-StartServiceRequestAdd	Used to add a Start Service Request. This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-StartServiceRequestDelete	Used to delete a Start Service Request. This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-StartServiceRequestRead	Used to read a Start Service Request. This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-StartServiceRequestUpdate	Used to update a Start Service Request. This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-StopServiceRequestAdd	Used to add a Stop Service Request. This component invokes the ATC1StopServiceRequest Inbound Web Service using the C1-StopServiceRequest Business Object.
C1-StopServiceRequestDelete	Used to delete a Stop Service Request. This component invokes the ATC1StopServiceRequest Inbound Web Service using the C1-StopServiceRequest Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-StopServiceRequestRead	Used to read a Stop Service Request. This component invokes the ATC1StopServiceRequest Inbound Web Service using the C1-StopServiceRequest Business Object.
C1-StopServiceRequestUpdate	Used to update a Stop Service Request. This component invokes the ATC1StopServiceRequest Inbound Web Service using the C1-StopServiceRequest Business Object.
C1-TransferServiceRequestAdd	Used to add a Transfer Service Request. This component invokes the ATC1TransferServiceRequest Inbound Web Service using the C1-TransferServiceRequest Business Object.
C1-TransferServiceRequestDelete	Used to delete a Transfer Service Request. This component invokes the ATC1StartServiceRequest Inbound Web Service using the C1-StartServiceRequest Business Object.
C1-TransferServiceRequestRead	Used to read a Transfer Service Request. This component invokes the ATC1TransferServiceRequest Inbound Web Service using the C1-TransferServiceRequest Business Object.
C1-TransferServiceRequestUpdate	Used to update a Transfer Service Request. This component invokes the ATC1TransferServiceRequest Inbound Web Service using the C1-TransferServiceRequest Business Object.
C1-CreateSARelationshipSubSA	Used to create SA Relationship Sub SA record. This component invokes the ATC1CreateSARelationshipSubSA Inbound Web Service using the C1CreateSARelationshipSubSA Service Script.
C1-RecommendBudget	Used to Recommend Budget. This component invokes the ATC1Recommend Budget Inbound Web Service using the C1-RecommendBudget Business Service.
C1-ContractOptEventAdd	Used to create a Contract Option Event record. This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventAdd Business Service.
C1-ContractOptEventDelete	Used to delete an existing Contract Option Event record. This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventDelete Business Service.
C1-ContractOptEventRead	Used to query an existing Contract Option Event record. This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventRead Business Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-ContractOptEventUpdate	Used to update an existing Contract Option Event record. This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventUpdate Business Service.
C1-PersonAdd	Used to create a Person record. This component invokes the ATC1Person Inbound Web Service using the C1PersonPhysical Business Object.
C1-PersonUpdate	Used to update an existing Person record. This component invokes the ATC1Person Inbound Web Service using the C1PersonPhysical Business Object.
C1-PersonDelete	Used to delete an existing Person record. This component invokes the ATC1Person Inbound Web Service using the C1PersonPhysical Business Object.
C1-PersonRead	Used to read an existing Person record. This component invokes the ATC1Person Inbound Web Service using the C1PersonPhysical Business Object.
C1-PersonBSAdd	Used to create a Person record. This component invokes the ATC1PersonBS Inbound Web Service using the C1-PersonAdd Business Service.
C1-PersonBSRead	Used to read a Person record. This component invokes the ATC1PersonBS Inbound Web Service using the C1-PersonRead Business Service.
C1-PersonBSUpdate	Used to update a Person record. This component invokes the ATC1PersonBS Inbound Web Service using the C1-PersonUpdate Business Service.
C1-PremiseAdd	Used to create a Premise record. This component invokes the ATC1Premise Inbound Web Service using the C1PremisePhysical Business Object.
C1-PremiseUpdate	Used to update an existing Premise record. This component invokes the ATC1Premise Inbound Web Service using the C1PremisePhysical Business Object.
C1-PremiseDelete	Used to delete an existing Premise record. This component invokes the ATC1Premise Inbound Web Service using the C1PremisePhysical Business Object.
C1-PremiseRead	Used to read an existing Premise record. This component invokes the ATC1Premise Inbound Web Service using the C1PremisePhysical Business Object.
C1-SARelationshipAdd	Used to create an SA Relationship record. This component invokes the ATC1SARelationship Inbound Web Service using the C1SARelationshipAdd Business Service.
C1-SARelationshipUpdate	Used to update (update, activate, cancel, create sub SA) an existing SA Relationship record. This component invokes the ATC1SARelationship Inbound Web Service using the C1SARelationshipUpdate Business Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-SARelationshipRead	Used to read an existing SA Relationship record. This component invokes the ATC1SARelationship Inbound Web Service using the C1SARelationshipRead Business Service.
C1-ServiceAgreementAdd	Used to create a Service Agreement record. This component invokes the ATC1ServiceAgreement Inbound Web Service using the C1ServiceAgreementPhysical Business Object.
C1-ServiceAgreementRead	Used to read an existing Service Agreement record. This component invokes the ATC1ServiceAgreement Inbound Web Service using the C1ServiceAgreementPhysical Business Object.
C1-ServiceAgreementUpdate	Used to update (activate, apply new start option, cancel, close, cancel proposal SA, accept proposal SA, decline proposal SA, activate proposal SA, reactivate, stop) an existing Service Agreement record. This component invokes the ATC1ServiceAgreementUpdate Inbound Web Service using the C1ServiceAgreementUpdate Business Service.
C1-StartStopUpdate	Used to invoke the Start Stop functionality including the cancel, stop and start actions. This component invokes the ATC1StartStop Inbound Web Service using the C1StartStopUpdate Business Service.
C1-StartStopRead	Used to read a Start Stop record. This component invokes the ATC1StartStop Inbound Web Service using the C1StartStopRead Business Service.
C1-StartStopBSUpdate	Used to invoke the Start Stop functionality including the cancel, stop and start actions. This component invokes the ATC1StartStopBS Inbound Web Service using the C1-StartStopMaintenanceRead Business Service.
C1-StartStopBSRead	Used to read a Start Stop record. This component invokes the ATC1StartStopBS Inbound Web Service using the C1-StartStopMaintenanceUpdate Business Service.
C1-StartServiceActionMethodAdd	Used for adding a Start Service Action Method record. This component invokes the ATC1StartServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-StartServiceActionMethodDelete	Used for deleting a Start Service Action Method record. This component invokes the ATC1StartServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-StartServiceActionMethodRead	Used for reading a Start Service Action Method record. This component invokes the ATC1StartServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-StartServiceActionMethodUpdate	Used for updating a Start Service Action Method record. This component invokes the ATC1StartServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-StopServiceActionMethodAdd	Used for adding a Stop Service Action Method record. This component invokes the ATC1StopServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-StopServiceActionMethodDelete	Used for deleting a Stop Service Action Method record. This component invokes the ATC1StopServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-StopServiceActionMethodRead	Used for reading a Stop Service Action Method record. This component invokes the ATC1StopServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-StopServiceActionMethodUpdate	Used for updating a Stop Service Action Method record. This component invokes the ATC1StopServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-SATypeStartOptionAdd	Used for adding a SA Type Start Option record. This component invokes the ATC1SATypeStartOption Inbound Web Service using the C1-SATypeStartOptionPhysicalBO Business Object.
C1-SATypeStartOptionDelete	Used for deleting a SA Type Start Option record. This component invokes the ATC1SATypeStartOption Inbound Web Service using the C1-SATypeStartOptionPhysicalBO Business Object.
C1-SATypeStartOptionRead	Used for reading a SA Type Start Option record. This component invokes the ATC1SATypeStartOption Inbound Web Service using the C1-SATypeStartOptionPhysicalBO Business Object.
C1-SATypeStartOptionUpdate	Used for updating a SA Type Start Option record. This component invokes the ATC1SATypeStartOption Inbound Web Service using the C1-SATypeStartOptionPhysicalBO Business Object.
C1-TransferServiceActionMethodAdd	Used for adding a Transfer Service Action Method record. This component invokes the ATC1TransferServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-TransferServiceActionMethodDelete	Used for deleting a Transfer Service Action Method record. This component invokes the ATC1TransferServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-TransferServiceActionMethodRead	Used for reading a Transfer Service Action Method record. This component invokes the ATC1TransferServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
C1-TransferServiceActionMethodUpdate	Used for updating a Transfer Service Action Method record. This component invokes the ATC1TransferServiceActionMethod Inbound Web Service using the C1-StartStopActionMethod Business Object.
W1-BusinessRead	Used to query an existing ODM Business Contact record. This component invokes the ATW1Person Inbound Web Service using the W1-Business Business Object.
W1-PersonRead	Used to query an existing ODM Person Contact record. This component invokes the ATW1Person Inbound Web Service using the W1-Person Business Object.
X1-ServicePointAdd	Used to create a Service Point record. This component invokes the ATX1ServicePoint Inbound Web Service using the X1D-ServicePoint Business Object.
X1-ServicePointDelete	Used to delete an existing Service Point record. This component invokes the ATX1ServicePoint Inbound Web Service using the X1D-ServicePoint Business Object.
X1-ServicePointRead	Used to query an existing Service Point record. This component invokes the ATX1ServicePoint Inbound Web Service using the X1D-ServicePoint Business Object.
X1-ServicePointUpdate	Used to update an existing Service Point record. This component invokes the ATX1ServicePoint Inbound Web Service using the X1D-ServicePoint Business Object.
X1D-ServicePoint	Used to add/edit/read/delete existing Service Point. This component invokes the ATX1DServicePoint Inbound Web Service using the X1D-ServicePoint Business Object.

Customer Program Management Cloud Service

Component	Description
X1-ControllableAssetSpec	Used to create controllable asset specification. This component invokes the X1-ControllableAssetSpec business object using the ATX1ControllableAssetSpec Inbound Web Service.
X1-ControllableAsset	Used to create controllable asset. This component invokes the X1-ControllableAsset business object using the ATX1ControllableAsset Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
X1-CtrlDvcStatusCheckRespType	Used to create CtrlDvcStatusCheckRespType. This component invokes the X1-CtrlDvcStatusCheckRespType business object using the ATX1CtrlDvcStatusCheckRespType IWS.
X1-CtrlDvcStatusCheckComm	Used to create CtrlDvcStatusCheckComm. This component invokes the X1-CtrlDvcStatusCheckComm business object using the ATX1CtrlDvcStatusCheckCommIWS.
X1-CtrlDvcStatusCheck	Used to create CtrlDvcStatusCheck. This component invokes the X1- CtrlDvcStatusCheck business object using the ATX1CtrlDvcStatusCheck IWS.
X1-CtrlDvcHeadEndSystem	Used to create CtrlDvcHeadEndSystem. This component invokes the X1-CtrlDvcHeadEndSystem business object using the ATX1CtrlDvcHeadEndSystemIWS.
X1-HowToSendSvcTaskResponse	Used to create HowToSendSvcTaskResponse. This invokes the X1-HowToSendSvcTaskResponse business object using the ATX1HowToSendSvcTaskResponseIWS.
X1-CtrlDvcStatusCheckCommType	Used to create CtrlDvcStatusCheckCommType. This invokes X1-CtrlDvcStatusCheckCommType business object using the ATX1CtrlDvcStatusCheckCommType IWS.
X1-DigitalAssetEnrollTaskType	Used to create DigitalAssetEnrollTaskType. This component invokes the X1-DigitalAssetEnrollTaskType business object using the ATX1DigitalAssetEnrollTaskType IWS.
X1-DigitalAssetEnrollTask	Used to create DigitalAssetEnrollTask. This component invokes the X1- DigitalAssetEnrollTask business object using the ATX1DigitalAssetEnrollTask IWS.
X1-EventSettlementCalcGroup	Used to create EventSettlementCalcGroup. This component invokes the X1-EventSettlementCalcGroup business object using the ATX1EventSettlementCalcGroup IWS.
X1-EventSettlementCalcRule	Used to create EventSettlementCalcRule. This component invokes the X1-EventSettlementCalcRule business object using the ATX1EventSettlementCalcRule Inbound Web Service.
X1-KWhAvdBusinessFlag	Used to create KWhAvdBusinessFlag. This component invokes the X1-KWhAvdBusinessFlag business object using the ATX1KWhAvdBusinessFlag Inbound Web Service.
X1-MeteredServicePointType	Used to create MeteredServicePointType. This component invokes the X1-MeteredServicePointType business object using the ATX1MeteredServicePointType Inbound Web Service.
X1-ProgramEvent	Used to create ProgramEvent. This component invokes the X1- ProgramEvent business object using the ATX1ProgramEvent Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
X1-EventParticipation	Used to create EventParticipation. This component invokes the X1-EventParticipation business object using the ATX1EventParticipation IWS.
X1-EventSettlementTransaction	Used to create EventSettlementTransaction. This component invokes the X1-EventSettlementTransaction business object using the ATX1EventSettlementTransaction IWS.
X1-ProgramEventSettlementTr	Used to create ProgramEventSettlementTr. This component invokes the X1-ProgramEventSettlementTr business object using the ATX1ProgramEventSettlementTr IWS.
X1-MsrmtVerifSubscription	Used to create MsrmtVerifSubscription. This component invokes the X1- MsrmtVerifSubscription business object using the ATX1MsrmtVerifSubscription IWS.
X1-MsrmtVerifTransaction	Used to create MsrmtVerifTransaction. This component invokes the X1- MsrmtVerifTransaction business object using the ATX1MsrmtVerifTransaction IWS.
X1-ServicePointEventOutcome	Used to create ServicePointEventOutcome. This component invokes the X1-ServicePointEventOutcome business object using the ATX1ServicePointEventOutcome IWS.
X1-RegressionAggregatorMV	Used to create RegressionAggregatorMV. This component invokes the X1-RegressionAggregatorMV business object using the ATX1RegressionAggregatorMV IWS.
X1-RegressionAggregatorMVType	Used to create RegressionAggregatorMVType. This component invokes the X1-RegressionAggregatorMVType business object using the ATX1RegressionAggregatorMVType IWS.
X1-CtrlDvcStatusCheckType	Used to create CtrlDvcStatusCheckRespType. This component invokes the X1-CtrlDvcStatusCheckType business object using the ATX1CtrlDvcStatusCheckType IWS.
X1-UpdateCDL	Used to create UpdateCDL. This component invokes the X1-UpdateCDL business object using the ATX1UpdateCDL IWS.
X1-DeviceLocation	Used to create DeviceLocation. This component invokes the X1-DeviceLocation business object using the ATX1DeviceLocation IWS.
X1-CtrlDvcStatusCheckResp	Used to create CtrlDvcStatusCheckResp. This component invokes the X1-CtrlDvcStatusCheckResp business object using the ATX1CtrlDvcStatusCheckResp IWS.
X1-ControllableDevice	Used to create ControllableDevice. This component invokes the X1-ControllableDevice business object using the ATX1ControllableDevice IWS.
X1-ControllableDeviceType	Used to delete an existing Contract Option Event record. This component invokes the ATC1ContractOptEvent Inbound Web Service using the C1-ContractOptEventDelete Business Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-ContractOptEventRead	Used to create ControllableDeviceType. This component invokes the X1-ControllableDeviceType business object using the ATX1ControllableDeviceType IWS.
X1-ControllableAssetType	Used to create ControllableAssetType. This component invokes the X1- ControllableAssetType business object using the ATX1ControllableAssetType IWS.
X1-DeviceLocationType	Used to create DeviceLocationType. This component invokes the X1- DeviceLocationType business object using the ATX1DeviceLocationType IWS.
X1-ProgramSubscriptionType	Used to create ProgramSubscriptionType. This component invokes the X1-ProgramSubscriptionType business object using the ATX1ProgramSubscriptionType IWS.
X1-ProgramCalculationGroup	Used to create ProgramCalculationGroup. This component invokes the X1-ProgramCalculationGroup business object using the ATX1ProgramCalculationGroup IWS.
X1-ProgramSubscription	Used to create ProgramSubscription. This component invokes the X1- ProgramSubscription business object using the ATX1ProgramSubscription IWS.
X1-CrossedMeterCorrectionAdd	Used to add a Cross Install Meter Bill Correction. This component invokes the X1-CrossedMeterCorrection Business Object using the ATX1CrossedMeterCorrection Inbound Web Service.
X1-CrossedMeterCorrectionRead	Used to read a Cross Install Meter Bill Correction. This component invokes the X1-CrossedMeterCorrection Business Object using the ATX1CrossedMeterCorrection Inbound Web Service.
X1-CrossedMeterCorrectionUpdate	Used to update a Cross Install Meter Bill Correction. This component invokes the X1-CrossedMeterCorrection Business Object using the ATX1CrossedMeterCorrection Inbound Web Service.
X1-CrossedMeterRequestAdd	Used to add a Cross Install Meter Request. This component invokes the X1-CrossedMeterRequest Business Object using the ATX1CrossedMeterRequest Inbound Web Service.
X1-CrossedMeterRequestDelete	Used to delete a Cross Install Meter Request. This component invokes the X1-CrossedMeterRequest Business Object using the ATX1CrossedMeterRequest Inbound Web Service.
X1-CrossedMeterRequestRead	Used to read a Cross Install Meter Request. This component invokes the X1-CrossedMeterRequest Business Object using the ATX1CrossedMeterRequest Inbound Web Service.
X1-CrossedMeterRequestUpdate	Used to update a Cross Install Meter Request. This component invokes the X1-CrossedMeterRequest Business Object using the ATX1CrossedMeterRequest Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
X1-GenericProgramCalcRule	Used to create GenericProgramCalcRule. This component invokes the X1-GenericProgramCalcRule business object using the ATX1GenericProgramCalcRule IWS.
X1-DigitalAssetUnenrollTaskTyp	Used to create DigitalAssetUnenrollTaskTyp. This component invokes the X1-DigitalAssetUnenrollTaskTyp business object using the ATX1 DigitalAssetUnenrollTaskTyp IWS.
X1-DAUnenrollActionMethod	Used to create DAUnenrollActionMethod. This component invokes the X1-DAUnenrollActionMethod business object using the ATX1 DAUnenrollActionMethod IWS.
X1-DAEnrollActionMethod	Used to create DAEnrollActionMethod. This component invokes the X1- DAEnrollActionMethod business object using the ATX1 DAEnrollActionMethod IWS.
X1-InitiativeDigitalAsset	Used to create InitiativeDigitalAsset. This component invokes the X1- InitiativeDigitalAsset business object using the ATX1InitiativeDigitalAsset IWS.
X1-MeteredServiceCrit	Used to create MeteredServiceCrit. This component invokes the X1- MeteredServiceCrit business object using the ATX1MeteredServiceCrit IWS.
X1-DigitalAssetMasterConfig	Used to create DigitalAssetMasterConfig. This component invokes the X1-DigitalAssetMasterConfig business object using the ATX1DigitalAssetMasterConfig IWS.
X1-DigitalAssetUnenrollTask	Used to create DigitalAssetUnenrollTask. This component invokes the X1-DigitalAssetUnenrollTask business object using the ATX1DigitalAssetUnenrollTask IWS.
X1-NMSDigitalAssetContact	Used to create NMSDigitalAssetContact. This component invokes the X1-NMSDigitalAssetContact business object using the ATX1NMSDigitalAssetContact IWS.
X1-NMSDigitalAssetCustSync	Used to create NMSDigitalAssetCustSync. This component invokes the X1-NMSDigitalAssetCustSync business object using the ATX1NMSDigitalAssetCustSync IWS.
X1-NMSDigitalAssetSubscription	Used to create NMSDigitalAssetSubscription. This component invokes the X1-NMSDigitalAssetSubscription business object using the ATX1NMSDigitalAssetSubscription IWS.
X1-NMSDigitalAssetLocation	Used to create NMSDigitalAssetLocation. This component invokes the X1-NMSDigitalAssetLocation business object using the ATX1NMSDigitalAssetLocation IWS.
X1-NMSDigitalAssetFacility	Used to create NMSDigitalAssetFacility. This component invokes the X1-NMSDigitalAssetFacility business object using the ATX1NMSDigitalAssetFacility IWS.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
X1-NMSDigitalAssetCustOutMsg	Used to create NMSDigitalAssetCustOutMsg. This component invokes the X1-NMSDigitalAssetCustOutMsg business object using the ATX1NMSDigitalAssetCustOutMsg IWS.
X1-CtrlDvcStatusCheckOBMsg	Used to create CtrlDvcStatusCheckOBMsg. This component invokes the X1-CtrlDvcStatusCheckOBMsg business object using the ATX1CtrlDvcStatusCheckOBMsg IWS.
D1-RemoveIMDObjectCount	Used to perform actions such as ADD, READ, UPDATE, and DELETE of RemoveIMDObjectCount. This component invokes the D1-RemoveIMDObjectCount using the ATD1RemoveIMDObjectCount Inbound Web Service.
D1-IMDFilter	This is the wrapper for the service that filters out IMD's based on the configuration of the device. This invokes the D1-IMDFilter Business Service using the ATD1IMDFilter Inbound Web Service.
D8-ReadOnDemandReadResultType	Used to perform actions such as ADD, READ, UPDATE and DELETE a Read On Demand Read Result Type for Itron. This component invokes the D8- ReadOnDemandReadResultType Business Object using the ATD8ReadOnDemandReadResultType.

CX REST API

Component	Description
C1-AccountDataRestIWS	Used to get an Account Financial Data. This component invokes the C1-AccountData Inbound Web Service using the C1FinDetails Service Script.
C1-ActionBudgetRestIWS	Used to update Budget. This component invokes the C1-Budget Inbound Web Service using the C1BudgetData Service Script.
D1-InstallEventIWS	Used to get an Install event. This component invokes the D1-GtInstEve Service Script using the D1-InstallEvent Inbound Web Service.
C1-ActionCutProcessRestIWS	Used to update Cut process. This component invokes the C1-CutProcess Inbound Web Service using the C1CutProcess Service Script.
C1-ActionOverdueProcessRestIWS	Used to update Overdue process. This component invokes the C1-OverdueProcess Inbound Web Service using the C1OverduePro Service Script.
C1-AdjustmentSummaryRestIWS	Used to retrieve Adjustment Summary. This component invokes the C1-Adjustment Inbound Web Service using the C1AdjSumry Service Script.
C1-BillSegmentSummaryRestIWS	Used to retrieve Bill Segment Summary. This component invokes the C1-BillSegment Inbound Web Service using the C1BilSegSmry Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-ExpandTreeRestIWS	Used to Expand Tree. This component invokes the F1-ExpandTree Inbound Web Service using the F1-ExpandTree Service Script.
C1-MultiAccountStatisticsRestIWS	Used to Get Multi Account Statistics. This component invokes the C1-AccountData Inbound Web Service using the C1FinStats Service Script.
C1-RatesRestIWS	Used to search Rate Schedules. This component invokes the C1-Rates Inbound Web Service using the C1RetRSSATyD Service Script.
C1-SATypeRestIWS	Used to retrieve SA Type List for SP Type and CIS Division. This component invokes the C1-SAType Inbound Web Service using the C1ReSATySPTD Service Script.
C1-MultiAccountUsageSummaryRestIWS	Used to Get Multi Account Usage Summary. This component invokes the C1-BilledUsageData Inbound Web Service using the C1MlAcUsgSum Service Script.
C1-PaymentSummaryRestIWS	Used to Retrieve the Payment Summary. This component invokes the C1-Payment Inbound Web Service using the C1-UpdPymt Service Script.
C1-PersonSearchRestIWS	Used to search a Person. This component invokes the C1-PersonSearch Inbound Web Service using the C1PersonSrch Service Script.
C1-SearchAccountPremisesRestIWS	Used to Search Account Premises. This component invokes the C1-BillingContext Inbound web Service using the C1-GetPremAcc Service Script.
C1-ServiceAgreementSearchRestIWS	Used to search for Service Agreement. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1SASearhSer Service Script.
C1-BillSearchRestIWS	Used to search Bill. This component invokes the C1-Bill Inbound Web Service using the C1BillsForAc Service Script.
C1-BillSegmentsSearchRestIWS	Used to search Bill Segment. This component invokes the C1-BillSegment Inbound Web Service using the C1BilSegSrch Service Script.
C1-BillSummaryRestIWS	Used to get Bill Summary. This component invokes the C1-Bill Inbound Web Service using the C1BillSumry Service Script.
C1-BusinessPersonQueriesSummaryRestIWS	Used to retrieve Business Person Queries. This component invokes the C1PersonQueries Inbound Web Service using the C1PersonSumm Service Script.
C1-BusinessSearch	Used to search CX4U Key Account Mgt. (KAM) This component invokes the C1-BusinessSearch Inbound Web Service using the C1BusinSrch Service Script.
C1-EntityReferencesRestIWS	Used to support of selected CX4U Entities. This component invokes the C1-EntityReferences Inbound Web Service using the C1EntRefSumm Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-GetCollectionProcessRestIWS	Used to get a collection process. This component invokes the C1-CollectionProcess Inbound Web Service using the C1CollProces Service Script.
C1-GetLandlordAgreementRestIWS	Used to get Landlord Agreement. This component invokes the C1-LandordAgreement Inbound Web Service using the C1LandLordAg Service Script.
C1-DeleteLandlordAgreement	Used to delete a Landlord record. This component invokes the C1-LandlordAgreement Inbound Web Service using the C1LandlordAg Service Script.
C1-GetSeveranceProcessRestIWs	Used to lead to the severance of a service agreement. This component invokes the C1-SeveranceProcess Inbound Web Service using the C1SeveraProc Service Script.
C1-PayPlanRestIWS	Used to create a Payment Tender. This component invokes the C1-PayPlan Inbound Web Service using the C1-PayPlan Service Script.
C1-ServicePointSearchRestIWS	Used to search Service Point. This component invokes the C1-ServicePointSearch Inbound Web Service using the C1ServPtSrch Script.
C1-UpdateLandlordAgreementRestIWS	Used to update Landlord Agreement. This component invokes the C1-LandordAgreement Inbound Web Service using the C1LandLordAg Service Script.
C1-CaseSearchRestIWS	Used to search Case. This component invokes the C1-Case Inbound Web Service using the C1CaseSearch Service Script.
C1-GetServiceAgreementStatistics_GG_NEE	Used to Service Agreement Statistics. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-ServiceAg Service Script.
C1-GetServiceAgreementStatistics_GG_NENE	Used to Get Service Agreement Statistics. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-ServiceAg Service Script.
C1-GetWebUserAccount	Used to Get Web User Account. This component invokes the C1-WebUserAccount Inbound Web Service using the C1-CxWbUsrAt Service Script.
C1-CreateWebUserAccount	Used to create a Web User Account. This component invokes the C1-WebUserAccount Inbound Web Service using the C1-CxWbUsrAtService Script.
C1-CreateWriteOffProcessRestIWS	Used to create a Write Off process. This component invokes the C1-WriteOffProcess Inbound Web Service using the C1WriteOffPr Service Script.
C1-GetAccountFinancialHistory	Used to get Account Financial History. This component invokes the C1-Bill Inbound Web Service using the C1-CreBill Service Script.
C1-GetBillBillSegmentRestIWS	Used to get a bill's Bill Segments. This component invokes the C1-BillSegment Inbound Web Service using the C1-GetBilSeg Service Script.
C1-GetBillRestIWS	Used to get a Bill. This component invokes the C1-Bill Inbound Web Service using the C1-GetBill Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-GetBillSegmentRestIWS	Used to get Bill Segment. This component invokes the C1-BillSegment Inbound Web Service using the C1-BillSegm Service Script.
C1-GetBudgetRestIWS	Used to get a Budget. This component invokes the C1-Budget Inbound Web Service using the C1BudgetDeta Service Script.
C1-GetCutProcessRestIWS	Used to get Cut process. This component invokes the C1-CutProcess Inbound Web Service using the C1CutProcess Service Script.
C1-GetLandlordAgreementsPremisesList	Used to get Land Lord Agreement Premise List. This component invokes the C1-LandlordAgreement Inbound Web Service using the C1LandlordAg Service Script.
C1-GetOverdueProcessRestIWS	Used to get Overdue process. This component invokes the C1-OverdueProcess Inbound Web Service using the C1OverduePro Service Script.
C1-GetPaymentChar	Used to get Payment Characteristics. This component invokes the C1-Payment Inbound Web Service using the C1-GtPytChar Service Script.
C1-GetPaymentPaySegmentRestIWS	Used to get Payment Segment in payment. This component invokes the C1-Payment Inbound Web Service using the C1-CxPayment Service Script.
C1-GetWriteOffProcessRestIWS	Used to get Write Off process. This component invokes the C1-WriteoffProcess Inbound Web Service using the C1WriteOffPr Service Script.
C1-PaymentDelete	Used to Delete Payment. This component invokes the C1-Payment Inbound Web Service using the C1-DltPaym Service Script.
C1-PayPlanUpdate	Used to Update Pay Plan. This component invokes the C1-PayPlan Inbound Web Service using the C1PayPlan Service Script.
C1-PaymentEventGet	Used to get Payment Event. This component invokes the C1-PaymentEvent Inbound Web Service using the C1-PayEvent Service Script.
C1-PaymentEventPaymentsRestIWS	Used to get payments of Payment Event. This component invokes the C1-PaymentEvent Inbound Web Service using the C1PayEvtPay Service Script.
C1-PaymentEventPost	Used to create Payment Event. This component invokes the C1-PaymentEvent Inbound Web Service using the C1-PayEvent Service Script.
C1-PaymentGet	Used to get Payment. This component invokes the C1-Payment Inbound Web Service using the C1-GetPaymnt Service Script.
C1-PaymentPost	Used to create Payment. This component invokes the C1-Payment Inbound Web Service using the C1-CrPymtHdr Service Script.
C1-PaymentPut	Used to update Payment. This component invokes the C1-Payment Inbound Web Service using the C1-UpdPymt Service Script.
C1-PaymentTenderRestIWS	Used to get Payment Tender. This component invokes the C1-PaymentTender Inbound Web Service using the C1-GetPayTen Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-ServicePointCreate	Used to create a Service Point. This component invokes the C1-ServicePoint Inbound Web Service using the C1-CreateSP Service Script.
C1-ServicePointDelete	Used to delete a Service Point. This component invokes the C1-ServicePoint Inbound Web Service using the C1-DeleteSP Service Script.
C1-ServicePointPut	Used to update a Service Point. This component invokes the C1-ServicePoint Inbound Web Service using the C1-UpdateSP Service Script.
C1-ServicePointRestIWS	Used to get a Service Point and it's child APIs. This component invokes the C1-ServicePoint Inbound Web Service using the C1-GetSP Service Script.
C1-UpdateBillCharacteristicRestIWS	Used to update Bill Characteristics. This component invokes the C1-Bill Inbound Web Service using the C1-CrBilChar Service Script.
C1-UpdateBillMessagesRestIWS	Used to update Bill Messages. This component invokes the C1-Bill Inbound Web Service using the C1-CrBilMsg Service Script.
C1-UpdateBillRestIWS	Used to update Bill. This component invokes the C1-Bill Inbound Web Service using the C1-CreBill Service Script.
C1-UpdateBillRoutingsRestIWS	Used to update Bill Routings. This component invokes the C1-Bill Inbound Web Service using the C1-CrBilRtng Service Script.
C1-UpdateBillSegmentItems	Used to update Bill Segments Items. This component invokes the C1-BillSegment Inbound Web Service using the C1ActBillSeg Service Script.
C1-UpdateBillSegmentMessages	Used to update Bill Segments Messages. This component invokes the C1-BillSegment Inbound Web Service using the C1ActBillSeg Service Script.
C1-UpdateCutProcessRestIWS	Used to update Cut process. This component invokes the C1-CutProcess Inbound Web Service using the C1CutProcess Service Script.
C1-UpdateOverdueProcessRestIWS	Used to update Overdue process. This component invokes the C1-OverdueProcess Inbound Web Service using the C1OverduePro Service Script.
C1-UpdatePaymentTender	Used to update Payment Tender. This component invokes the C1-PaymentTender Inbound Web Service using the C1-UpPyTndrs Service Script.
C1-UpdatePaymentTenderChar	Used to update Payment Tender Char. This component invokes the C1-PaymentTender Inbound Web Service using the C1-UpPyTndCh Service Script.
C1-UpdatePersonCharacteristics	Used to update a Person Characteristics. This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonIdentifiers	Used to update a Person Identifiers. This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonNames	Used to update a Person Name. This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-UpdatePersonNameOptions	Used to update Person Name Options. This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonPhones	Used to update Person Phones. This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonRelationships	Used to update Person Relationships. This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdatePersonSeasonalAddress	Used to update a Person Seasonal Address. This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-UpdateServicePointOperationAreas	Used to update Service Point Operation Areas. This component invokes the C1-ServicePoint Inbound Web Service using the C1-UpdateSP Service Script.
C1-UpdateWriteOffProcessRestIWS	Used to update Write Off process. This component invokes the C1-WriteoffProcess Inbound Web Service using the C1WriteOffPr Service Script.
CX-BillPayHistoryRetriever	Views Bill or Payment History. This component invokes the CXBillPayHistoryRetriever Inbound Web Service using the WX-BillPayHs Service Script.
CX-BillSegmentHistoryRetriever	Bill Segment History -Amount and Quantity. This component invokes the CXBillSegmentHistoryRetriever Inbound Web Service using the CX-BsegHist Service Script.
CX-AccountChargesSummaryRetriever	Retrieves Account Charges Summary. This component invokes the CXAccountChargesSummaryRetriever Inbound Web Service using the
CX-BillView	View Bill. This component invokes the CXBillView Inbound Web Service using the WX-ViewBill Service Script.
CX-CancelSchedPay	Cancels scheduled One-Time Payment. This component invokes the CXCancelSchedPay Inbound Web Service using the WX-CanSchPay Service Script.
CX-ConnectedAccountsDetails	Retrieves the List of Connected Accounts. This component invokes the CXConnectedAccountsDetails Inbound Web Service using the CXConAccDtls Service Script.
CX-ConnectedAccountsWithGuests	Connected accounts with guest users. This component invokes the CXConnectedAccountsWithGuests Inbound Web Service using the CXConActWGst Service Script.
CX-ContextInfo	Gets Self Service Context Information. This component invokes the CXContextInfo Inbound Web Service using the CX-CntxtInfo Service Script.
CX-CreateMeterRead	Creates Meter Read. This component invokes the CXCreateMeterRead Inbound Web Service using the WX-CreSSMR Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
CX-FinancialHistoryDownload	Account's Financial History Download. This component invokes the CXFinancialHistoryDownload Inbound Web Service using the CX-AcctFinHD Service Script.
CX-FinancialHistoryRetriever	Gets account's Financial History. This component invokes the CXFinancialHistoryRetriever Inbound Web Service using the CX-AcctFinHs Service Script.
CX-FormsList	Forms List. This component invokes the CXFormsList Inbound Web Service using the CX-FormsList Service Script.
CX-FormsManagement	Forms Management. This component invokes the CXFormsManagement Inbound Web Service using the WX-FormsMgmt Service Script.
CX-GetConsumptionSummary	Gets Consumption Summary. This component invokes the CXGetConsumptionSummary Inbound Web Service using the WX-GetConS Service Script.
CX-GetDSSAlerts	Returns DSS Alerts. This component invokes the CXGetDSSAlerts Inbound Web Service using the CX-SSAlerts Service Script.
CX-GetMeteredOrBDSAs	List of Metered or Bill Determinant SA. This component invokes the CXGetMeteredOrBDSAs Inbound Web Service using the CX-RETSASPCL Service Script.
CX-GetSelfServiceLabels	Retrieves Self-Service Field Labels. This component invokes the CXGetSelfServiceLabels Inbound Web Service using the CX-GetSSLbl Service Script.
CX-AutoPaySetup	Auto Pay Setup. This component invokes the CXAutoPaySetup Inbound Web Service using the WX-ApaySet Service Script.
CX-GetSelfServiceDropdowns	Retrieve Self-Service Dropdowns. This component invokes the CXGetSelfServiceDropDowns Inbound Web Service using the WX-GetSSDD Service Script.
CX-GetSelfServiceLabels_upd	Retrieve Self-Service Field Labels. This component invokes the CXGetSelfServiceLabels Inbound Web Service using the CX-GetSSLbl Service Script.
CX-MakePayment_upd	Multi Account Payments. This component invokes the CXMakePayment Inbound Web Service using the WX-MakePay Service Script.
CX-MaintainCommPreferences	Maintains Communication Preferences. This component invokes the CXMaintainCommPreferences Inbound Web Service using the WX-CommPref Service Script.
CX-MaintainMailingAddressInfo	Maintains Mailing Address Information. This component invokes the CXMaintainMailingAddressInfo Inbound Web Service using the WX-MAddMain Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
CX-MaintainPersonLanguageTimeZone	Maintains Person Language and Time Zone. This component invokes the CXMaintainPersonLanguageTimeZone Inbound Web Service using the WX-MPerLngTZ Service Script.
CX-MaintainWebUser	Maintains Self Service Web User. This component invokes the CXMaintainWebUser Inbound Web Service using the CXWebUsrMain Service Script.
CX-MaintainWebUserAccount	Maintains Self Service Web User Account. This component invokes the CXMaintainWebUserAccount Inbound Web Service using the CXWebUsrAcct Service Script.
CX-MakePayment	Multi Account Payments. This component invokes the CXMakePayment Inbound Web Service using the WX-MakePay Service Script.
CX-ManageCharities	Manages Auto Pay Charities. This component invokes the CXManageCharities Inbound Web Service using the C1PrcChrtyAP Service Script.
CX-ManagePaymentOptions	Manages Self-Service Payment Options. This component invokes the CXManagePaymentOptions Inbound Web Service using the C1MngPayOpt Service Script.
CX-PaymentExtensionRequest	Payment Extension Request. This component invokes the CXPaymentExtensionRequest Inbound Web Service using the C1ProcPayExt Service Script.
CX-PreferredPayDateRequest	Processes Preferred Pay Date Request. This component invokes the CXPreferredPayDateRequest Inbound Web Service using the C1PrefPayDt Service Script.
CX-PremiseSearch	Premise Search. This component invokes the CXPremiseSearch Inbound Web Service using the WX-PremSrch Service Script.
CX-ProcessBudgetRequest	Process Budget Request. This component invokes the CXProcessBudgetRequest Inbound Web Service using the WX-BudgetReq Service Script.
CX-ProcessInvitation	Process Invitation. This component invokes the CXProcessInvitation Inbound Web Service using the CXProcInvite Service Script.
CX-ProcessPayArrangementRequest	Processes Payment Arrangement Request. This component invokes the CXProcessPayArrangementRequest Inbound Web Service using the WX-PayArrReq Service Script.
CX-ProcessStartStopRequest	Processes Start Stop Request. This component invokes the CXProcessStartStopRequest Inbound Web Service using the WX-StrStpReq Service Script.
CX-RateAnalysis	Performs Rate Analysis. This component invokes the CXRateAnalysis Inbound Web Service using the WX-RateAnlys Service Script.
CX-RetrieveScalarUsage	Retrieves Scalar Usage. This component invokes the CXRetrieveScalarUsage Inbound Web Service using the WX-RetScaUsg Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
CX-SetBillNotifyPreference	Sets up Billing Notification Preferences. This component invokes the CXSetBillNotifyPreference Inbound Web Service using the WX-BNPSet Service Script.
CX-SetNotificationPreferences	Sets Notification Preferences. This component invokes the CXSetNotificationPreferences Inbound Web Service using the WX-SetNtPref Service Script.
CX-UsageChargesProjected	Retrieves Projected Charges. This component invokes the CXUsageChargesProjected Inbound Web Service using the WX-ProjChrg Service Script.
CX-UsageChargesToDate	Retrieves Usage Charges to Date. This component invokes the CXUsageChargesToDate Inbound Web Service using the WX-UsgChrgDt Service Script.
CX-VerifyAccount	Account Verification (AND/OR). This component invokes the CXVerifyAccount Inbound Web Service using the CX-VerAcct Service Script.
CX-WebUserSearch	Web User Search. This component invokes the CXWebUserSearch Inbound Web Service using the CXWebUsrSrch Service Script.
WX-ProcessStartStopRequest	Processes Start Stop Request. This component invokes the WXProcessStartStopRequest Inbound Web Service using the WX-StrStpReq Service Script.
D1-CreateInstallEvent	Used to create an Install event. This component invokes the D1-CrInsEven Service Script using the D1-InstallEvent Inbound Web Service.
D1-UpdateInstallEvent	Used to update an Install Event. This component invokes the D1-UpdInsEve Service Script using the D1-InstallEvent Inbound Web Service.
D1-DeleteInstallEvents	Used to delete an Install Event. This component invokes the D1-DelInsEve Service Script using the D1-InstallEvent Inbound Web Service.
D1-GetUsageSubscriptionChildRestIWS	Used to get any Usage Subscription child operation. This component invokes different service scripts using the D1-UsageSubscription web service.
D1-UpdateUsageSubscriptionRestIWS	Used to update an Usage Subscription operation. This component invokes D1-UpdateUS Service Script using the D1-UsageSubscription web service.
D1-GetUsageTransactionRestIWS	Used to get an Usage Transaction. This component invokes D1-GtUsgTran Service Script using the D1-UsageTransaction web service.
D1-MeterIWS	Used to get a Meter. This component invokes the D1-GetMeter Service Script using the D1-Meter Inbound Web Service.
D1-MeterIWSPost	Used to create a Meter. This component invokes the D1-CreateMtr Service Script using the D1-Meter Inbound Web Service.
D1-MeterIWSPut	Used to update a Meter. This component invokes the D1-UpdateMtr Service Script using the D1-Meter Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-MeterIWSDelete	Used to delete a Meter. This component invokes the D1-DeleteMtr Service Script using the D1-Meter Inbound Web Service.
D1-ServicePointRestIWS	Used to get a Service Point. This component invokes the D1-GetSPoint Service Script using the D1-ServicePoint Inbound Web Service.
D1-CreateServicePointRestIWS	Used to create a Service Point. This component invokes the D1-CreateSP Service Script using the D1-ServicePoint Inbound Web Service.
D1-UpdateServicePointRestIWS	Used to update a Service Point. This component invokes the D1-UpdateSPt Service Script using the D1-ServicePoint Inbound Web Service.
D1-DeleteServicePointRestIWS	Used to delete a Service Point. This component invokes the D1-DeleteSP Service Script using the D1-ServicePoint Inbound Web Service.
D1-CreateUsageSubscriptionRestIWS	Used to create a Usage Subscription. This component invokes the D1-CreateUS Service Script using the D1-UsageSubscription Inbound Web Service.
D1-DeleteUsageSubscriptionRestIWS	Used to delete a Usage Subscription. This component invokes the D1-DeleteUS Service Script using the D1-UsageSubscription Inbound Web Service.
D1-GetUsageSubscriptionRestIWS	Used to get a Usage Subscription. This component invokes D1-GetUsgSub script using D1-UsageSubscription Web Service.
D1-UsageTransactionDelete	Used to delete a Usage Transaction. This component invokes the D1-DelUsgTrn Script using the D1-UsageTransaction Inbound Web Service.
D1-UsageTransactionGet	Used to get a Usage Transaction. This component invokes D1-GtUsgTran Service Script using the D1-UsageTransaction Web Service.
D1-UsageTransactionPost	Used to create a Usage Transaction. This component invokes D1-CrUsgTran Service Script using the D1-UsageTransaction Inbound Web Service.
D1-UsageTransactionActionRestIWS	Used to update UT status.This component invokes the D1ActUsgTran Service Script using the D1-UsageTransactionActionRestIWS.
D1-UsageTransactionPut	Used to update a Usage Transaction. This component invokes D1-UpUsgTran Service Script using the D1-UsageTransaction IWS.
D1-ItemIWS	Used to get an Item. This component invokes the D1-GetItem Service Script using the D1-Item Inbound Web Service.
D1-ItemIWSPost	Used to create an Item. This component invokes the D1-CreateItm Service Script using the D1-Item Inbound Web Service.
D1-ItemIWSPut	Used to update an Item. This component invokes the D1-UpdItem Service Script using the D1-Item Inbound Web Service.
D1-ItemIWSDelete	Used to delete an Item. This component invokes the D1-DelItem Service Script using the D1-Item Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-AccountRestIWS	Used to get an Account & it's child API's. This component invokes the C1-Account Inbound Web Service using the C1-GtAccount Service Script.
C1-AccountSearchNEERestIWS	Used to Search Account. This component invokes the C1-Account Inbound Web Service using the C1-CXAccount Service Script.
C1-AccountSearchNENERestIWS	Used to Search Account. This component invokes the C1-Account Inbound Web Service using the C1-CXAccount Service Script.
C1-CreateAccountRestIWS	Used to create an Account. This component invokes the C1-Account Inbound Web Service using the C1-CrAccount Service Script.
C1-UpdateAccountRestIWS	Used to update an Account. This component invokes the C1-Account Inbound Web Service using the C1-UpAccount Service Script.
C1-DeleteAccount	Used to delete an Account. This component invokes the C1-Account Inbound Web Service using the C1-DelAcc Service Script.
C1-DeleteBill	Used to delete a Bill. This component invokes the C1-Bill Inbound Web Service using the C1-DeletBill Service Script.
C1-DeleteWebUserAccount	Used to delete a Web User Account. This component invokes the C1-WebUserAccount Inbound Web Service using the C1-DelWbUsAt Service Script.
C1-PersonRestIWS	Used to get a Person and its child APIs. This component invokes the C1-Person Inbound Web Service using the C1-GetPerson Service Script.
C1-PersonPost	Used to create a Person. This component invokes the C1-Person Inbound Web Service using the C1-CrePerson Service Script.
C1-PersonQueriesNEERestIWS	Business Person Query This component invokes the C1-PersonQueries Inbound Web Service using the C1PersonSumm Service Script.
C1-PersonQueriesNENERestIWS	Business Person Query. This component invokes the C1-PersonQueries Inbound Web Service using the C1PersonSumm Service Script.
C1-UpdatePerson	Used to update a Person. This component invokes the C1-Person Inbound Web Service using the C1-UpdPerson Service Script.
C1-DeletePerson	Used to delete a Person. This component invokes the C1-Person Inbound Web Service using the C1-DelPerson.
C1-CustomerContactRestIWS	Used to get a Customer Contact & it's child API's. This component invokes the C1-CustomerContact Inbound Web Service using the C1-GetCustCt.
C1-CustomerContactPost	Used to create a Customer Contact. This component invokes the C1-CustomerContact Inbound Web Service using the C1-CreCustCt Service Script.
C1-CustomerContactPut	Used to update a Customer Contact. This component invokes the C1-CustomerContact Inbound web Service using the C1-UpdCustCt Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-CustomerContactDelete	Used to delete a Customer Contact. This component invokes the C1-Person Inbound Web Service using the C1-DelCustCt Service Script.
C1-PremiseRestIWS	Used to get a Premise & its child API's. This component invokes the C1-Premise Inbound Web Service using the C1-GtPremise Service Script.
C1-CreatePremiseRestIWS	Used to create a Premise. This component invokes the C1-Premise Inbound Web Service using the C1-CrPremise Service Script.
C1-UpdatePremiseRestIWS	Used to update a Premise. This component invokes the C1-Premise Inbound Web Service using the C1-UpPremise Service Script.
C1-DeletePremiseRestIWS	Used to delete a Premise. This component invokes the C1-Premise Inbound Web Service using the C1-DePremiseService Script.
C1-ServiceAgreementBilledUsage_GL_NEE	Used to Update SA Billed Usage GL NEE. This component invokes the C1-ServiceAgreement Inbound web Service using the C1-ServiceAg Service Script.
C1-ServiceAgreementBilledUsage_GL_NENE	Used to Update SA Billed Usage GL NENE. This component invokes the C1-ServiceAgreement Inbound web Service using the C1-ServiceAg Service Script.
C1-ServiceAgreementRestIWS	Used to get a Service Agreement and the child API's. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-GetSA Service Script.
C1-CreateServiceAgreementRestIWS	Used to create a Service Agreement. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-CreateSA Service Script.
C1-UpdateServiceAgreementRestIWS	Used to update a Service Agreement. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-UpdateSA Service Script.
C1-UpdateWebUserAccount	Used to Update Web User Account. This component invokes the C1-WriteoffProcess Inbound Web Service using the C1WriteOffPr Service Script.
C1-WebUserCreate	Used to Create Web User. This component invokes the C1-WebUser Inbound Web Service using the C1-WebUser Service Script.
C1-WebUserDelete	Used to Delete Web User. This component invokes the C1-WebUser Inbound Web Service using the C1-DelWebUsr Service Script.
C1-WebUserGet	Used to Get Web User. This component invokes the C1-WebUser Inbound Web Service using the C1-WebUser Service Script.
C1-WebUserUpdate	Used to Update Web User. This component invokes the C1-WebUser Inbound Web Service using the C1-WebUser Service Script.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-DeleteServiceAgreementRestIWS	Used to delete a Service Agreement. This component invokes the C1-ServiceAgreement Inbound Web Service using the C1-DeleteSA Service Script.

Data Model

Component	Description
D1-SmartMeter	Used to perform actions such as ADD, READ, UPDATE and DELETE a Smart Meter. This component invokes the D1-SmartMeter Business Object using the ATD1SmartMeter Inbound Web Service.
D1-DvcCommEquipment	Used to create a Device Communication Equipment. This component invokes the D1-DvcCommEquipment using the ATD1 DvcCommEquipment inbound web service.
D1-DvcCommEquipmentType	Used to create a Device Communication Equipment Type. This component invokes the D1-DvcCommEquipmentType using ATD1DvcCommEquipmentType Inbound Web Service.
D1-DeviceConfiguration	Used to add Device Configuration to a device. This component invokes the D1-DeviceConfiguration Business Object using the ATD1DeviceConfigurationSVC Inbound Web Service.
D1-IntervalChannel	Used to add interval measuring components to a device configuration. This component invokes the D1-IntervalChannel Business Object using the ATD1IntervalChannel Inbound Web Service.
D1-Register	Used to add scalar measuring components to a device configuration. This component invokes the D1-Register Business Object using the ATD1Register Inbound Web Service.
D1-ServicePoint	Used to create a Service Point. This component invokes the D1- ServicePoint Business Object using the ATD1ServicePoint Inbound Web Service.
D1-SmartMeterInstallEvent	Used to create an installation event for a Smart Meter. This component invokes the D1-SmartMeterInstallEvent Business Object using the ATD1SmartMeterInstallEvent Inbound Web Service.
D1-ManualMeterInstallEvent	Used to create an installation event for a Manual Meter. This component invokes the D1-ManualMeterInstallEvent Business Object using the ATD1ManualMeterInstallEvent Inbound Web Service.
D1-Transformer	Used to create a Facility (Transformer) for a service type. This component invokes the D1-Transformer Business Object using the ATD1Transformer Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-ElectricityNetworkLocation	Used to create an Electricity Network Location. This component invokes the D1-ElectricityNetworkLocation Business Object using the ATD1ElectricityNetworkLocation Inbound Web Service.
D1-IntervalScratchpad	Used to create Interval Scratchpad MC. This component invokes the D1-IntervalScratchpad Business Object using the ATD1IntervalScratchpad Inbound Web Service.
D1-Person	Used to create a Person. This component invokes the D1-Person Business Object using the ATD1Person Inbound Web Service.
D1-Business	Used to create a Business. This component invokes the D1-Business Business Object using the ATD1Business Inbound Web Service.
D1-RegisterAutoRead	Used to add register auto read measuring components to a device configuration. This component invokes the D1-RegisterAutoRead Business Object using the ATD1RegisterAutoRead Inbound Web Service.
D1-Item	Used to perform actions such as ADD, READ, UPDATE and DELETE an Item. This component invokes the D1-Item Business Object using the ATD1Item Inbound Web Service.
D1-ItemInstallEvent	Used to create an installation event for a Smart Meter. This component invokes the D1-ItemInstallEvent Business Object using the ATD1ItemInstallEvent Inbound Web Service.
D1-AutoReadRegisterType	Used to define the properties of measuring components automatically read on a regular basis, but for which only one measurement is received at a time, meaning one measurement per Initial Measurement. This component invokes the D1-AutoReadRegisterType Business Object using the ATD1AutoReadRegisterType Inbound Web Service.
D1-DeviceConfigurationType	Used to create a device configuration type used to create device configuration for a device. This component invokes the D1-DeviceConfigurationType Business Object using the ATD1DeviceConfigurationType Inbound Web Service.
D1-ExceptionType	Used to set up VEE Exception Types. This component invokes the D1-ExceptionType Business Object using the ATD1ExsceptionType Inbound Web Service.
D1-ExternalApplication	Used to create a Service Provider. This component invokes the D1-ExternalApplication Business Object using the ATD1ExternalApplication Inbound Web Service.
D1-HeadEndSystem	Used to create a Head End system service provider. This component invokes the D1-HeadEndSystem Business Object using the ATD1HeadEndSystem Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-ItemConfigurationType	Creates a configuration types for Item Types that can represent badged items. This component invokes the D1-ItemConfigurationType Business Object using the ATD1ItemConfigurationType Inbound Web Service.
D1-ItemType	Creates an item type applicable to badged and unbadged non-meter devices. This component invokes the D1-ItemType Business Object using the ATD1ItemType Inbound Web Service.
D1-ManualMeterType	Creates an item type applicable to badged and unbadged non-meter devices. This component invokes the D1-ManualMeterType Business Object using the ATD1ManualMeterType Inbound Web Service.
D1-ServiceType	Used to create a Service Type. This component invokes the D1-ServiceType Business Object using the ATD1ServiceType Inbound Web Service.
D1-SmartMeterType	Used to create a Device of Smart Meter Type. This component invokes the D1-SmartMeterType Business Object using the ATD1SmartMeterType Inbound Web Service.
D1-TimeOfUse	Used to create a TOU. This component invokes the D1-TimeOfUse Business Object using the ATD1TimeOfUse Inbound Web Service.
D1-UnitOfMeasure	Used to create a Unit of Measure. This component invokes the D1-UnitOfMeasure Business Object using the ATD1 UnitOfMeasure Inbound Web Service.
D1-Manufacturer	Describes the structure and business rules applicable to manufacturers. This component invokes the D1-Manufacturer Business Object using the ATD1 Manufacturer Inbound Web Service.
D1-MeasurementCycle	Describes the Measurement Cycle creation. This component invokes the D1-MeasurementCycle Business Object using the ATD1MeasurementCycle Inbound Web Service.
D1-RegisterTypePhysical	Used to create Register Type component. This component invokes the D1-RegisterTypePhysical Business Object using the ATD1RegisterTypePhysical Inbound Web Service.
D1-ServicePointType	A generic component used to create Service point type. This component invokes the D1-ServicePointType Business Object using the ATD1ServicePointType Inbound Web Service.
D1-MeasurementCycleRoute	Used to create Measurement Cycle Route. This component invokes the D1-MeasurementCycleRoute Business Object using the ATD1MeasurementCycleRoute Inbound Web Service.
D1-HowToProcessDeviceInfo	Describes how to process the Device Related Information. This component invokes the D1-HowToProcessDeviceInfo Business Object using the ATD1HowToProcessDeviceInfo Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-HeadendSQILookup	A non-instantiable Extendable Lookup BO that provides translation between an external SQI sent in via a meter data source/provider, such as a head-end system and SQIs that have been configured within the application. SGG adapter products will deliver instantiable child BOs of this BO if SQI translation is needed. This component invokes the D1-HeadendSQILookup Business Object using the ATD1HeadendSQILookup Inbound Web Service.
D1-ServiceQuantityIdentifier	Describes the structure and business rules applicable to Service Quantity Identifier definitions. This component invokes the D1-ServiceQuantityIdentifier Business Object using the ATD1ServiceQuantityIdentifier Inbound Web Service.
D1-Market2	Valid Service Providers are Market Participants. This component invokes the D1-Market2 Business Object using the ATD1Market2 Inbound Web Service.
D1-ContactType	Describes Contact Type. This component invokes the D1-ContactType Business Object using the ATD1ContactType Inbound Web Service.
D2-DynCompValidation	Used to perform actions such as ADD, READ, UPDATE, and DELETE a DynCompValidation. This component invokes the D2- DynCompValidation Business Object using the ATD2DynCompValidation Inbound Web Service.

Data Synchronization

Component	Description
C1-FASyncRequestRead	Used to read an FA Sync Request record. This component invokes the ATC1FASyncRequestRead Inbound Web Service using the C1-FASyncRequest Business Object.
C1-GetSyncRequestId	Used to get the sync request ID of a given primary key ID (for example: Person, SP, SA, Contract Option, Contract Option Event, etc) using a specific query zone. The following zones can be used:• C1-GETSYNCU2 - Get Sync Req ID using Contract Option Event ID• C1-GETSYNCU3 - Get Sync Req ID using Contract Option ID• C1-GETPERSYN - Get Sync Request ID using Person ID• C1-GETSASYNC - Get Sync Request ID using Service Agreement ID• C1-GETFASYNC - Get Sync Request ID using Field Activity ID• C1-GETSYNCRQ - Get Sync Request ID using External IDThis component invokes the ATC1GetSyncRequestId Inbound Web Service using C1-GetSyncRequestId Business Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-MDM2ContOptEvtSyncReqRead	Used to read an MDM2 Contract Option Event Sync Request record. This component invokes the ATC1MDM2ContrOptEvtSyncReqRead Inbound Web Service using the C1-MDM2ContrOptEvtSyncRequest Business Object.
C1-MDM2ContractOptSyncReqRead	Used to read an MDM2 Contract Option Sync Request record. This component invokes the ATC1MDM2ContractOptSyncReqRead Inbound Web Service using the C1-MDM2ContractOptSyncRequest Business Object.
C1-NtfContactPreferenceSyncUpdate	Used to update a Notification Contact Preference Sync Request. This component invokes the ATC1NtfContactPreferenceSyncRead Inbound Web Service using the C1-NtfContactPreferenceSync Business Object.
C1-MDM2PersonSyncRequestRead	Used to read an MDM2 Person Sync Request record. This component invokes the ATC1MDM2PersonSyncReqRead Inbound Web Service using the C1-MDM2PersonSyncRequest Business Object.
C1-MDM2SARelSyncRequestRead	Used to read an MDM2 SA Relationship Sync Request record. This component invokes the ATC1MDM2SARelSyncRequestRead Inbound Web Service using the C1-MDM2SARelSyncRequest Business Object.
F1-GenericDataSyncAdd	Used to add a Generic Sync Request record. This component invokes the ATF1GenericDataSync Inbound Web Service using the F1-GenericDataSync Business Object.
F1-GenericDataSyncDelete	Used to delete a Generic Sync Request record. This component invokes the ATF1GenericDataSync Inbound Web Service using the F1-GenericDataSync Business Object.
F1-GenericDataSyncRead	Used to read a Generic Sync Request record. This component invokes the ATF1GenericDataSync Inbound Web Service using the F1-GenericDataSynct Business Object.
F1-GenericDataSyncUpdate	Used to update a Generic Sync Request record. This component invokes the ATF1GenericDataSync Inbound Web Service using the F1-GenericDataSynct Business Object.
C1-MDM2SASyncRequestRead	Used to read an MDM2 Service Agreement Sync Request record. This component invokes the ATC1MDM2SASyncRequestRead Inbound Web Service using the C1-MDM2SASyncRequest Business Object.
D1-InstallEventSyncRequestRead	Used to read an ODM Install Event Sync Request record. This component invokes the ATD1InstallEventSyncRequestRead Inbound Web Service using D1-InstallEventSyncRequest Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-MDMAssetSyncRequestRead	Used to read an MDM Asset Sync Request record. This component invokes the ATW1MDMAssetSyncRequestRead Inbound Web Service using the W1-MDMAssetSyncRequest Business Object.
W1-OngoingSyncRequestAssetNodeRead	Used to read an Asset-Node Ongoing Sync Request record. This component invokes the ATW1OngoingSyncRequestAssetNodeRead Inbound Web Service using the W1-OngoingSyncRequestAssetNode Business Object.
X1-GetInboundSyncRequestId	Used to retrieve the Inbound Sync Request Id depending on the query zone used. The following zones can be used:• X1-GETSYNCEX - Get Inbound Sync Request ID using External IDThis component invokes the ATX1GetSyncRequestInId Inbound Web Service using the X1-GetSyncRequestInId Business Service.
C1-ExternalRepoPlusBillingSync	Used to read a Billing Data Extract Sync Request record. This component invokes the ATC1ExternalRepoPlusBillingSync Inbound Web Service using C1-ExternalRepoPlusBillingSync Business Object.
C1-ExternalRepoPlusCusDataSync	Used to read a Customer Data Extract Sync Request record. This component invokes the ATC1ExternalRepoPlusCusDataSyncRead Inbound Web Service using C1-ExternalRepoPlusCusDataSync Business Object.
C1-ExternalRepoPlusSPMeterSync	Used to read a SP and Meter Data Extract Sync Request record. This component invokes the ATC1ExternalRepoPlusBillingSyncRead Inbound Web Service using the C1-ExternalRepoPlusSPMeterSync Business Object.
C1-ExternalRepoPlusSASPSyncRead	Used to read a SA/SP Data Sync for DataConnect v1+. This component invokes the ATC1ExternalRepoPlusSASPSync Inbound Web Service using the C1-ExternalRepoSASPSync Business Object.
C1-ExternalRepoPlusSASPSyncUpdate	Used to update a SA/SP Data Sync for DataConnect v1+ This component invokes the ATC1ExternalRepoPlusSASPSync Inbound Web Service using the C1-ExternalRepoSASPSync Business Object.
C1-ExternalRepoPlusSPMeterSyncRead	Used to read a Service Point Sync Request record. This component invokes the ATC1ExternalRepoPlusSPMeterSync Inbound Web Service using the C1-ExternalRepoPlusSPMeterSync Business Object.
C1-ExternalRepoPlusSPMeterSyncUpdate	Used to update a Service Point Sync Request record. This component invokes the ATC1ExternalRepoPlusSPMeterSync Inbound Web Service using the C1-ExternalRepoPlusSPMeterSync Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-ExternalRepoPlusMailAddSyncRead	Used to read a Mailing Address Data for DataConnect v1+ sync. This component invokes the ATC1ExternalRepoPlusMailAddSync Inbound Web Service using the C1-ExternalRepoPlusMailAddSync Business Object.
C1-ExternalRepoPlusMailAddSyncUpdate	Used to read a Mailing Address Data for DataConnect v1+ sync. This component invokes the ATC1ExternalRepoPlusMailAddSync Inbound Web Service using the C1-ExternalRepoPlusMailAddSync Business Object.

Extendable Lookup

Component	Description
X1-C2MSATypeMappingAdd	Used to create a Customer to Meter SA Type mapping Extendable Lookup record. This component invokes the ATX1C2MSATypeMapping Inbound Web Service using the X1-C2MSATypeMapping Business Object.
X1-C2MSATypeMappingUpdate	Used to update an existing Customer to Meter SA Type mapping Extendable Lookup record. This component invokes the ATX1C2MSATypeMapping Inbound Web Service using the X1-C2MSATypeMapping Business Object.
X1-C2MSATypeMappingDelete	Used to delete an existing Customer to Meter SA Type mapping Extendable Lookup record. This component invokes the ATX1C2MSATypeMapping Inbound Web Service using the X1-C2MSATypeMapping Business Object.
X1-C2MSATypeMappingRead	Used to query an existing Customer to Meter SA Type mapping Extendable Lookup record. This component invokes the ATX1C2MSATypeMapping Inbound Web Service using the X1-C2MSATypeMapping Business Object.
X1-CCBMDM-MDMCCB-LookupAdd	Used to create the mapping values for each field that requires translation between CCB and MDM Maintenance Objects. The following lookup value can be used: • C1_HIGHLIGHT_TYPE_FLG - Highlight Type • C1_USG_RQST_SA_SKIP_RSN_FLG - SA Skip Reason • CONT_OPT_TYPE_CD - Contract Option Type • DISCON_LOC_CD - Disconnect Location • FA_TYPE_CD - Field Activity Type • KEY_SW - key • LS_SL_FLG - Life Support / Sensitive Load • OK_TO_ENTER_SW - OK to Enter • PER_OR_BUS_FLG - Contact Type This component invokes the ATX1CCBMDM-MDMCCB-Lookup Inbound Web Service using the X1-CCBMDM-MDMCCB-Lookup Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
X1-CCBMDM-MDMCCB-LookupUpd	Used to update an existing mapping values for each field that requires translation between CCB and MDM Maintenance Objects. The following lookup value can be used: • C1_HIGHLIGHT_TYPE_FLG - Highlight Type • C1_USG_RQST_SA_SKIP_RSN_FLG - SA Skip Reason • CONT_OPT_TYPE_CD - Contract Option Type • DISCON_LOC_CD - Disconnect Location • FA_TYPE_CD - Field Activity Type • KEY_SW - key; LS_SL_FLG - Life Support / Sensitive Load • OK_TO_ENTER_SW - OK to Enter • PER_OR_BUS_FLG - Contact Type This component invokes the ATX1CCBMDM-MDMCCB-Lookup Inbound Web Service using the X1-CCBMDM-MDMCCB-Lookup Business Object.
X1-CCBMDM-MDMCCB-LookupDel	Used to delete an existing mapping values for each field that requires translation between CCB and MDM Maintenance Objects. The following lookup value can be used: • C1_HIGHLIGHT_TYPE_FLG - Highlight Type • C1_USG_RQST_SA_SKIP_RSN_FLG - SA Skip Reason • CONT_OPT_TYPE_CD - Contract Option Type • DISCON_LOC_CD - Disconnect Location • FA_TYPE_CD - Field Activity Type • KEY_SW - key; LS_SL_FLG - Life Support / Sensitive Load • OK_TO_ENTER_SW - OK to Enter • PER_OR_BUS_FLG - Contact Type This component invokes the ATX1CCBMDM-MDMCCB-Lookup Inbound Web Service using the X1-CCBMDM-MDMCCB-Lookup Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
X1-CCBMDM-MDMCCB-LookupRead	Used to query an existing mapping values for each field that requires translation between CCB and MDM Maintenance Objects. The following lookup value can be used: • C1_HIGHLIGHT_TYPE_FLG - Highlight Type • C1_USG_RQST_SA_SKIP_RSN_FLG - SA Skip Reason • CONT_OPT_TYPE_CD - Contract Option Type • DISCON_LOC_CD - Disconnect Location • FA_TYPE_CD - Field Activity Type • KEY_SW - key • LS_SL_FLG - Life Support / Sensitive Load • OK_TO_ENTER_SW - OK to Enter • PER_OR_BUS_FLG - Contact Type This component invokes the ATX1CCBMDM-MDMCCB-Lookup Inbound Web Service using the X1-CCBMDM-MDMCCB-Lookup Business Object.
X1-ODMMDM-MDMODM-LookupAdd	Used to create the mapping values for each field that requires translation between ODM and MDM maintenance objects. The following lookup value can be used: • ASSET_STATUS (Asset/Device Status) • ASSET_TYPE_CD (Asset Type/Device Type) • CONTACT_BUS_OBJ_CD (Contact Business Object) • DISCONNECT_LOC_FLG (Disconnect Location); KEY_SW (Key) • LIFE_SUPPORT_SENS_LOAD_FLG (Life Support/Sensitive Load) • MR_INSTR_CD (SP Instruction) • MR_WARN_CD (SP Warning) • MTR_LOC_CD (Site Location) • OK_TO_ENTER_FLG (OK to Enter) • SVC_TYPE_FLG (Service Type) This component invokes the ATX1ODMMDM-MDMODM-Lookup Inbound Web Service using X1-ODMMDM-MDMODM-Lookup Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
X1-ODMMDM-MDMODM-LookupDelete	Used to delete an existing mapping values for each field that requires translation between ODM and MDM maintenance objects. The following lookup value can be used: • ASSET_STATUS (Asset/Device Status) • ASSET_TYPE_CD (Asset Type/Device Type) • CONTACT_BUS_OBJ_CD (Contact Business Object) • DISCONNECT_LOC_FLG (Disconnect Location) • KEY_SW (Key) • LIFE_SUPPORT_SENS_LOAD_FLG (Life Support/Sensitive Load) • MR_INSTR_CD (SP Instruction) • MR_WARN_CD (SP Warning) • MTR_LOC_CD (Site Location) • OK_TO_ENTER_FLG (OK to Enter) • SVC_TYPE_FLG (Service Type) This component invokes the ATX1ODMMDM-MDMODM-Lookup Inbound Web Service using X1-ODMMDM-MDMODM-Lookup Business Object.
X1-ODMMDM-MDMODM-LookupUpd	Used to update and existing mapping values for each field that requires translation between ODM and MDM maintenance objects. The following lookup value can be used: • ASSET_STATUS (Asset/Device Status) • ASSET_TYPE_CD (Asset Type/Device Type) • CONTACT_BUS_OBJ_CD (Contact Business Object) • DISCONNECT_LOC_FLG (Disconnect Location); KEY_SW (Key) • LIFE_SUPPORT_SENS_LOAD_FLG (Life Support/Sensitive Load) • MR_INSTR_CD (SP Instruction) • MR_WARN_CD (SP Warning) • MTR_LOC_CD (Site Location); • OK_TO_ENTER_FLG (OK to Enter) • SVC_TYPE_FLG (Service Type) This component invokes the ATX1ODMMDM-MDMODM-Lookup Inbound Web Service using X1-ODMMDM-MDMODM-Lookup Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
X1-ODMMDM-MDMODM-LookupRead	Used to query an existing mapping values for each field that requires translation between ODM and MDM maintenance objects. The following lookup value can be used: • ASSET_STATUS (Asset/Device Status) • ASSET_TYPE_CD (Asset Type/Device Type) • CONTACT_BUS_OBJ_CD (Contact Business Object) • DISCONNECT_LOC_FLG (Disconnect Location); KEY_SW (Key) • LIFE_SUPPORT_SENS_LOAD_FLG (Life Support/Sensitive Load) • MR_INSTR_CD (SP Instruction) • MR_WARN_CD (SP Warning) • MTR_LOC_CD (Site Location) • OK_TO_ENTER_FLG (OK to Enter) • SVC_TYPE_FLG (Service Type) This component invokes the ATX1ODMMDM-MDMODM-Lookup Inbound Web Service using X1-ODMMDM-MDMODM-Lookup Business Object.

General

Component	Description
W1-ApprovalRequest	Used to create, update, read, or delete ApprovalRequest in the WAM application. This component calls the W1-ApprovalRequest business object using the Inbound Web Service.
W1-CreLocationDocumentCmpEvt	Used to create, update, read, or delete CreLocationDocumentCmpEvt in the WAM application. This component calls the W1-CreLocationDocumentCmpEvt business object using the Inbound Web Service.
W1-DocAttachment	Used to create, update, read, or delete DocAttachment in the WAM application. This component calls the W1-DocAttachment business object using the Inbound Web Service.
W1-CreDocumentPayCmpEvt	Used to create, update, read, or delete CreDocumentPayCmpEvt in the WAM application. This component calls the W1-CreDocumentPayCmpEvt business object using the Inbound Web Service
W1-DocUrl	Used to create, update, read, or delete DocUrl in the WAM application. This component calls the W1-DocUrl business object using the Inbound Web Service.
W1-FinancialTransaction	Used to create, update, read, or delete FinancialTransaction in the WAM application. This component calls the W1-FinancialTransaction business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-StandardNote	Used to create, update, read, or delete StandardNote in the WAM application. This component calls the W1-StandardNote business object using the Inbound Web Service.
W1-ARSQL	Used to read an Approval Request ID using an External ID. This component calls the CM-ARSQL business service using the ATW1ARSQL Inbound Web Service.
W1-FTSQL	Used to read an FT ID using TimeSheet Detail ID. This component calls the CM-FTSQL business service using the ATW1FTSQL Inbound Web Service.
W1-Fact	Used to create, update, read, or delete a fact in the WAM application. This component calls the W1-Fact business object using the ATW1FACT Inbound Web Service.
W1- OnlineLoaderReq	Used to create, update, read, or delete OnlineLoaderReq in the WAM application. This component calls the W1- OnlineLoaderReq business object using the ATWLOnlineLoaderReq Inbound Web Service.
W1- OnlineLoaderRequestType	Used to create, update, read, or delete OnlineLoaderRequestType in the WAM application. This component calls the W1-OnlineLoaderRequestType business object using the ATW1OnlineLoaderRequesrType Inbound Web Service.
W1-GenericAttachmentLite	Used to create, update, read, or delete GenericAttachmentLite in the WAM application. This component calls the W1-GenericAttachmentLite business object using the ATW1 GenericAttachmentLite Inbound Web Service.
W1-Adjustment	Used to create, update, read, or delete Adjustment in the WAM application. This component calls the W1-Adjustment business object using the ATW1Adjustment Inbound Web Service.
W1-RETCEVT	Used to retrieve completion events for a measurement in the WAM application. This component calls the W1-RETCEVT business service using the ATW1RETCEVT Inbound Web service.
W1-CMRETREFATT	Used to retrieve all the referenced attachments of an Object. This component calls the W1-RETREFATT business service using the ATW1RETREFATT Inbound Web Service.
W1-CMDeleteMODocument	Used to delete document entry on a Maintenance Object. This component calls the W1-DeleteMODocument business service using the ATW1DeleteMODocument Inbound Web Service.
W1-CMAddMODocument	Used to add document entry to a maintenance object. This component calls W1-AddMODocument business service using the ATW1AddMODocument Inbound Web service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AttachmentUrl	Used to create, update, read, or delete AttachmentUrl in the WAM application. This component calls the W1-AttachmentUrl business object using the ATW1AttachmentUrl Web Service.

Initial Measurement Data

Component	Description
D1-IMDSeeder	Used to perform actions such as ADD, READ, UPDATE, and DELETE of an IMD Seeder. This component invokes the D1-IMDSeeder Business Object using the ATD1IMDSeeder Inbound Web Service.
D1-ManualIMDInterval	Used to perform actions such as ADD, READ, UPDATE, and DELETE of Manual IMD Interval records. This component invokes the D1-ManualIMDInterval Business Object using the ATD1ManualIMDInterval Inbound Web Service.
D1-ManualIMDScalar	Used to perform actions such as ADD, READ, UPDATE, and DELETE of Manual IMD Scalar records. This component invokes the D1-ManualIMDScalar Business Object using the ATD1ManualIMDScalar Inbound Web Service.
D1-InitialLoadIMDInterval	Used to perform actions such as ADD, READ, UPDATE, and DELETE of Initial Load IMD Interval records. This component invokes the D1-InitialLoadIMDInterval Business Object using the ATD1InitialLoadIMDInterval Inbound Web Service.
D1-InitialLoadIMDScalar	Used to perform actions such as ADD, READ, UPDATE, and DELETE of Initial Load IMD Scalar records. This component invokes the D1-InitialLoadIMDScalar Business Object using the ATD1InitialLoadIMDScalar Inbound Web Service.
D1-EstimationIMDInterval	Used to perform actions such as ADD, READ, UPDATE, and DELETE of Estimation IMD Interval records. This component invokes the D1-EstimationIMDInterval Business Object using the ATD1EstimationIMDInterval Inbound Web Service.
D1-EstimationIMDScalar	Used to perform actions such as ADD, READ, UPDATE, and DELETE of Estimation IMD Scalar records. This component invokes the D1-EstimationIMDScalar Business Object using the ATD1EstimationIMDScalar Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Integration

Component	Description
D1-OngoingSyncRequestContact	Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestContact. This component invokes the D1-Ongoing SyncRequestContact Business Object using the ATD1OngoingSyncRequestContact Inbound Web Service.
D1-OngoingSyncRequestSP	Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestSP. This component invokes the D1-OngoingSyncRequestSP Business Object using the ATD1OngoingSyncRequestSP Inbound Web Service.
D1-OngoingSyncRequestDevice	Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestDevice. This component invokes the D1-OngoingSyncRequestDevice Business Object using the ATD1OngoingSyncRequestDevice Inbound Web Service.
D2-OngoingSyncRequestUS	Used to perform actions such as ADD, READ, UPDATE, and DELETE a OngoingSyncRequestUS. This component invokes the D2-OngoingSyncRequestUS Business Object using the ATD2OngoingSyncRequestUS Inbound Web Service.
D1-OngoingSyncRequestDC	Used to perform actions such as ADD, READ, UPDATE,and DELETE a OngoingSyncRequestDC. This component invokes the D2-OngoingSyncRequestDC Business Object using the ATD1OngoingSyncRequestDC Inbound Web Service.
D1-CompositeSyncRequestDC	Used to perform actions such as ADD, READ, UPDATE,and DELETE a CompositeSyncRequestDC. This component invokes the D1-CompositeSyncRequestDC Business Object using the ATD1CompositeSyncRequestDC Inbound Web Service.
D1-OngoingSyncRequestMC	Used to perform actions such as ADD, READ, UPDATE,and DELETE a OngoingSyncRequestMC. This component invokes the D1-OngoingSyncRequestMC Business Object using the ATD1OngoingSyncRequestMC Inbound Web Service.
D1-OngoingSyncReqScalarMtrRead	Used to perform actions such as ADD, READ, UPDATE,and DELETE a OngoingSyncReqScalarMtrRead. This component invokes the D1-OngoingSyncReqScalarMtrRead Business Object using the ATD1OngoingSyncReqScalarMtrRead Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-OngoingSyncRequestIE	Used to perform actions such as ADD, READ, UPDATE,and DELETE a OngoingSyncRequestIE. This component invokes the D1-OngoingSyncRequestIE Business Object using the ATD1OngoingSyncRequestIE Inbound Web Service.
D2-UsageTran_ValSQHighList	Used to perform actions such as READ on D2-UsageTransaction This component invokes the D2-UsageTransaction Business Object using the ATD2UsageTransactiion Inbound Web Service.
D2-UsageTran_ValUsgPeriod	Used to perform actions such as READ on D2-UsageTransaction This component invokes the D2-UsageTransaction Business Object using the ATD2UsageTransactiion Inbound Web Service.
D2-InitialSyncRequestDynOpt	Used to perform actions such as ADD, READ, UPDATE,and DELETE a InitialSyncRequestDynOpt. This component invokes the D2- InitialSyncRequestDynOpt Business Object using the ATD2InitialSyncRequestDynOpt Inbound Web Service.
D2-OngoingSyncRequestDynOpt	Used to perform actions such as ADD, READ, UPDATE,and DELETE a OngoingSyncRequestDynOpt. This component invokes the D2-OngoingSyncRequestDynOpt Business Object using the ATD2OngoingSyncRequestDynOpt Inbound Web Service.
D2-InitialSyncRequestDynOptEvt	Used to perform actions such as ADD, READ, UPDATE,and DELETE a InitialSyncRequestDynOptEvt. This component invokes the D2- InitialSyncRequestDynOptEvt Business Object using the ATD2InitialSyncRequestDynOptEvt Inbound Web Service.
D2-OngoingSyncRequestDynOptEvt	Used to perform actions such as ADD, READ, UPDATE,and DELETE a OngoingSyncRequestDynOptEvt. This component invokes the D2- OngoingSyncRequestDynOptEvt Business Object using the ATD2OngoingSyncRequestDynOptEvt Inbound Web Service.
D2-CCBContractOptionTypeLookup	Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBContractOptionTypeLookup. This component invokes the D2- CCBContractOptionTypeLookup Business Object using the ATD2CCBContractOptionTypeLookup Inbound Web Service.
D1-HowToTranslateExternalValue	Used to perform actions such as ADD, READ, UPDATE,and DELETE a HowToTranslateExternalValue. This component invokes the D1- HowToTranslateExternalValue Business Object using the ATD1HowToTranslateExternalValue Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-CCBContactTypeLookup	Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBContactTypeLookup. This component invokes the D1-CCBContactTypeLookup Business Object using the ATd1CCBContactTypeLookup Inbound Web Service.
D1-CCBLifeSupSensitiveLdLookup	Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBLifeSupSensitiveLdLookup. This component invokes the D1- CCBLifeSupSensitiveLdLookup Business Object using the ATD1CCBLifeSupSensitiveLdLookup Inbound Web Service.
D2-CCBSATypeLookup	Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBSATypeLookup. This component invokes the D2- CCBSATypeLookup Business Object using the ATD2CCBSATypeLookup Inbound Web Service.
D2-CCBSAStatusLookup	Used to perform actions such as ADD, READ, UPDATE,and DELETE a CCBSAStatusLookup. This component invokes the D2-CCBSAStatusLookup Business Object using the ATD2CCBSAStatusLookup Inbound Web Service.
D1-InitialSyncRequestDevice	Used to perform actions such as ADD, READ, UPDATE,and DELETE a InitialSyncRequestDevice. This component invokes the D2-InitialSyncRequestDevice Business Object using the ATD1InitialSyncRequestDevice Inbound Web Service.

Inventory Management

Component	Description
W1-AcceptLineMaterial	Used to create, update, read, or delete AcceptLineMaterial in the WAM application. This component calls the W1-AcceptLineMaterial business object using the Inbound Web Service.
W1-PhysicalInvCountMaster	Used to create, update, read, or delete PhysicalInvCountMaster in the WAM application. This component calls the W1-PhysicalInvCountMaster business object using the Inbound Web Service.
W1-InventoryAdjustmentILM	Used to create, update, read, or delete Inventory Adjustment Lot Management in the WAM application. This component calls the W1-InventoryAdjustmentILM business object using the Inbound Web Service.
W1-MaterialReturnLine	Used to create, update, read, or delete MaterialReturnLine in the WAM application. This component calls the W1-MaterialReturnLine business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-IsSPAStLn	Used to execute IsSPAStLn in the WAM application. This component calls the W1-IsSPAStLnservice script using the Inbound Web Service.
W1-GenericDataLoaderSync	Used to create, update, read, or delete GenericDataLoaderSync in the WAM application. This component calls the W1-GenericDataLoaderSync business object using the Inbound Web Service.
W1-CMUpdCntLin	Used to execute CMUpdCntLin in the WAM application. This component calls the W1-CMUpdCntLin service script using the Inbound Web Service.
W1-CMRETCNTLIN	Used to read CMRETCNTLIN in the WAM application. This component calls the W1-CMRETCNTLIN business service using the Inbound Web Service.
W1-AddSPAIsLn	Used to execute AddSPAIsLn in the WAM application. This component calls the W1-AddSPAIsLn service script using the Inbound Web Service.
W1-AcceptlineSQL	Used to create, update, read, or delete AcceptlineSQL in the WAM application. This component calls the W1-AcceptlineSQL business object using the Inbound Web Service.
W1-AcceptLineCraft	Used to create, update, read, or delete AcceptLineCraft in the WAM application. This component calls the W1-AcceptLineCraft business object using the Inbound Web Service.
W1-StockTransaction	Used to create, update, read, or delete StockTransaction in the WAM application. This component calls the W1-StockTransaction business object using the Inbound Web Service.
W1-BOMGenStockItem	Used to create, update, read, or delete BOMGenStockItem in the WAM application. This component calls the W1-BOMGenStockItem business object using the Inbound Web Service.
W1-IndependentPartBOM	Used to create, update, read, or delete IndependentPartBOM in the WAM application. This component calls the W1-IndependentPartBOM business object using the Inbound Web Service.
W1-BOMGENSISQL	Used to read a BOM Part ID using Resource Type ID. This component calls the CM-BOMGENSI business service using the ATW1BOMGENSISQL Inbound Web Service.
W1-ReorderReviewSQL	Used to read/retrieve the ReviewReorder ID using Stock Item Detail ID. This component calls the CM-RRSQL business service using the ATW1RRSQL Inbound Web Service.
W1-InvAdjustInvTracked	Used to create, update, read, or delete InvAdjustInvTracked in the WAM application. This component calls the W1-InvAdjustInvTracked business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-InvAdjLotManaged	Used to create, update, read, or delete InvAdjLotManaged in the WAM application. This component calls the W1-InvAdjLotManaged business object using the Inbound Web Service.
W1-InvAdjRegularInventory	Used to create, update, read, or delete InvAdjRegularInventory in the WAM application. This component calls the W1-InvAdjRegularInventory business object using the Inbound Web Service.
W1-MaterialRequestHeader	Used to create, update, read, or delete MaterialRequestHeader in the WAM application. This component calls the W1-MaterialRequestHeader business object using the Inbound Web Service.
W1-MaterialRequestLine	Used to create, update, read, or delete MaterialRequestLine in the WAM application. This component calls the W1-MaterialRequestLine business object using the Inbound Web Service.
W1-MaterialRequestTemplate	Used to create, update, read, or delete MaterialRequestTemplate in the WAM application. This component calls the W1-MaterialRequestTemplate business object using the Inbound Web Service.
W1-MaterialReturnHeader	Used to create, update, read, or delete MaterialReturnHeader in the WAM application. This component calls the W1-MaterialReturnHeader business object using the Inbound Web Service.
W1-PhysicalInventoryCountLine	Used to create, update, read, or delete PhysicalInventoryCountLine in the WAM application. This component calls the W1-PhysicalInventoryCountLine business object using the Inbound Web Service.
W1-PhysicalInventoryCountMaster	Used to create, update, read, or delete PhysicalInventoryCountMaster in the WAM application. This component calls the W1-PhysicalInventoryCountMaster business object using the Inbound Web Service.
W1-PhysicalInventoryHeader	Used to create, update, read, or delete PhysicalInventoryHeader in the WAM application. This component calls the W1-PhysicalInventoryHeader business object using the Inbound Web Service.
W1-ReceiptHeader	Used to create, update, read, or delete ReceiptHeader in the WAM application. This component calls the W1-ReceiptHeader business object using the Inbound Web Service.
W1-ReceiptLine	Used to create, update, read, or delete ReceiptLine in the WAM application. This component calls the W1-ReceiptLine business object using the Inbound Web Service.
W1-ReceiptLineCraft	Used to create, update, read, or delete ReceiptLineCraft in the WAM application. This component calls the W1-ReceiptLineCraft business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-ReorderReview	Used to create, update, read, or delete ReorderReview in the WAM application. This component calls the W1-ReorderReview business object using the Inbound Web Service.
W1-ReturnLine	Used to create, update, read, or delete ReturnLine in the WAM application. This component calls the W1-ReturnLine business object using the Inbound Web Service.
W1-SIDDirectPurchase	Used to create, update, read, or delete SIDDirectPurchase in the WAM application. This component calls the W1-SIDDirectPurchase business object using the Inbound Web Service.
W1-SIDSpecifiDirectPurchase	Used to create, update, read, or delete SIDSpecifiDirectPurchase in the WAM application. This component calls the W1-SIDSpecifiDirectPurchase business object using the Inbound Web Service
W1-SIDExpensedAtReceipt	Used to create, update, read, or delete SIDExpensedAtReceipt in the WAM application. This component calls the W1-SIDExpensedAtReceipt business object using the Inbound Web Service.
W1-SIDInventory	Used to create, update, read, or delete SIDInventory in the WAM application. This component calls the W1-SIDInventory business object using the Inbound Web Service.
W1-SIDSpecificLot	Used to create, update, read, or delete SIDSpecificLot in the WAM application. This component calls the W1-SIDSpecificLot business object using the Inbound Web Service.
W1-StockItem	Used to create, update, read, or delete StockItem in the WAM application. This component calls the W1-StockItem business object using the Inbound Web Service.
W1-StockTransferHeader	Used to create, update, read, or delete StockTransferHeader in the WAM application. This component calls the W1-StockTransferHeader business object using the Inbound Web Service.
W1-StockTransferIssueLine	Used to create, update, read, or delete StockTransferIssueLine in the WAM application. This component calls the W1-StockTransferIssueLine business object using the Inbound Web Service.
W1-StockTransferReceiptHeader	Used to create, update, read, or delete StockTransferReceiptHeader in the WAM application. This component calls the W1-StockTransferReceiptHeader business object using the Inbound Web Service.
W1-StockTransferReceiptLine	Used to create, update, read, or delete StockTransferReceiptLine in the WAM application. This component calls the W1-StockTransferReceiptLine business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-StockTransferRequestLine	Used to create, update, read, or delete StockTransferRequestLine in the WAM application. This component calls the W1-StockTransferRequestLine business object using the Inbound Web Service.
W1-AcceptLineSQL	Used to read Acceptline from the receipt line. This component calls the ACPT_LINE_ID business service using the (ATW1AcceptLineSQL) Inbound Web Service.
W1-TransferShippingMemo	Used to create, update, read, or delete TransferShippingMemo in the WAM application. This component calls the W1-TransferShippingMemo business object using the Inbound Web Service.
W1-TrackedStockShippingLine	Used to create, update, read, or delete TrackedStockShippingLine in the WAM application. This component calls the W1-TrackedStockShippingLine Business object using the Inbound Web Service.
W1-StockShippingLine	Used to create, update, read, or delete StockShippingLine in the WAM application. This component calls the W1-StockShippingLine Business object using the Inbound Web Service.
W1-TransferShippingMemo	Used to create, update, read, or delete TransferShippingMemo in the WAM application. This component calls the W1-TransferShippingMemo business object using the Inbound Web Service.
W1-ReturnShippingMemo	Used to create, update, read, or delete ReturnShippingMemoin in the WAM application. This component calls the W1-ReturnShippingMemo business object using the Inbound Web Service.
W1- RepairShippingMemo	Used to create, update, read, or delete RepairShippingMemo the WAM application. This component calls the W1-ReturnShippingMemo Business object using the Inbound Web Service.
W1-LotStockShippingLine	Used to create, update, read, or delete LotStockShippingLine the WAM application. This component calls the W1-LotStockShippingLine Business object using the Inbound Web Service.
W1- MaterialIssueLine	Used to create, update, read, or delete MaterialIssueLine in the WAM application. This component calls the W1- MaterialIssueLine Business object using the Inbound Web Service.
W1- GeneralShippingMemo	Used to create, update, read, or delete GeneralShippingMemo in the WAM application. This component calls the W1-GeneralShippingMemo Business object using the Inbound Web Service.
W1- ShipmentDeficiencyType	Used to create, update, read, or delete ShipmentDeficiencyType in the WAM application. This component calls the W1-ShipmentDeficiencyType Business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CMStockItemInformation	Used to search stock item information with all search parameters like Stock Item search screen in WAM application. This component calls the CM-STKITMQ1 business service using the Inbound Web Service.
W1-CMStockItemIdentifier	Used to search stock item information based on stock item identifier like Stock identifier search screen in WAM application. This component calls the CM-STKITMQ2 business service using the Inbound Web Service.
W1- CMStockItemDetailByStockItemDetailInfo	Used to search stock item details using various parameters like WAM application. This component calls the CM-SIDQ1 business service using the Inbound Web Service.
W1- CMStockItemDetailByStockItemDetailID	Used to search stock item details using various parameters like WAM application. This component calls the CM-SIDQ2 business service using the Inbound Web Service.
W1-CMStockItemDetailByStockItemInfo	Used to search stock item details using various parameters like WAM application. This component calls the CM-SIDSTRQRY business service using the Inbound Web Service.
W1- CMRETPOLINEID	Used to retrieve PO Line ID using PO Header ID and PO Line Business Object. This component calls the CM-RETPOLINE business service using the Inbound Web Service.
W1-CMRETPRLINEID	Used to retrieve PR Line ID using PR Header ID and PR Line Business Object. This component calls the CM-RETPRLINE business service using the Inbound Web Service.
W1-CMMaterialRequestHeaderInformation	Used to search Material request header information. This component calls the CM-MTRQHDQ1 business service using the Inbound Web Service.
W1-CMMaterialRequestHeaderID	Used to search Material request header ID. This component calls the CM-MTRQHDQ2 business service using the Inbound Web Service.
W1-CMShippingMemoByShippingMemoInfo	Used to search Shipping Memo Information. This component calls the CM-SHPMMQ1 business service using the Inbound Web Service.
W1-CMShippingMemoByShippingMemoID	Used to search Shipping Memo ID. This component calls the CM-SHPMMQ2 business service using the Inbound Web Service.
W1-CMRecvAllnPartial	Used to receive all or partial stock items. This component calls the CM-RcvAllPar script using the Inbound Web Service.
W1-RetriveInventoryDetails	Used to retrieve/read the stocks inventory details. This component calls the W1-RetInvDtl script using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Invoicing

Component	Description
W1-InvoiceHeader	Used to create, update, read, or delete InvoiceHeader in the WAM application. This component calls the W1-InvoiceHeader business object using the Inbound Web Service.
W1-InvoiceLine	Used to create, update, read, or delete InvoiceLine in the WAM application. This component calls the W1-InvoiceLine business object using the Inbound Web Service.
W1-CMInvoiceHeaderInformation	Used to search Invoice header information in the WAM application. This component calls the CM-INVCHDRQ1 business service using the Inbound Web Service.
W1-CMInvoiceHeaderIdentifier	Used to search invoice using identifier in the WAM application. This component calls the CM-INVCHDRQ2 business service using the Inbound Web Service.
W1-CMInvoiceLineInformation	Used to search invoice using line information in the WAM application. This component calls the CM-INVCHDRQ3 business service using the Inbound Web Service.

Purchasing

Component	Description
W1-BCAccessList	Used to create, update, read, or delete BCAccessList in the WAM application. This component calls the W1-BCAccessList business object using the Inbound Web Service.
W1-BCCraftLine	Used to create, update, read, or delete BCCraftLine in the WAM application. This component calls the W1-BCCraftLine business object using the Inbound Web Service.
W1-CMBCLNS	Used to fetch all blanket contract lines from active blanket contract in the WAM application. This component calls W1-CMBCLNS business service using the Inbound Web Service.
W1-CrePOFrBC	Used to create purchase order from blanket contract in the WAM application. This component calls W1CrePOFrBC service script using the Inbound Web Service.
W1-CrePORev	Used to create new revision for purchase order in the WAM application. This component calls W1CrePORev service script using the Inbound Web Service.
W1-InvoiceGroup	Used to create, update, read, or delete InvoiceGroup in the WAM application. This component calls the W1-InvoiceGroup business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CMCrtPORev	Used to execute CMCrtPORev in the WAM application. This component calls the W1-CMCrtPORevservice script using the Inbound Web Service.
W1-BCLineIntegration	Used to create, update, read, or delete BCLineIntegration in the WAM application. This component calls the W1-BCLineIntegration business object using the Inbound Web Service.
W1-BCEquipmentLine	Used to create, update, read, or delete BCEquipmentLine in the WAM application. This component calls the W1-BCEquipmentLine business object using the Inbound Web Service.
W1-BCHeader	Used to create, update, read, or delete BCHeader in the WAM application. This component calls the W1-BCHeader business object using the Inbound Web Service.
W1-BCHeaderIntegration	Used to create, update, read, or delete BCHeaderIntegration in the WAM application. This component calls the W1-BCHeaderIntegration business object using the Inbound Web Service.
W1-BCOtherLine	Used to create, update, read, or delete BCOtherLine in the WAM application. This component calls the W1-BCOtherLine business object using the Inbound Web Service.
W1-BCStockItemLine	Used to create, update, read, or delete BCStockItemLine in the WAM application. This component calls the W1-BCStockItemLine business object using the Inbound Web Service.
W1-CraftPOLine	Used to create, update, read, or delete CraftPOLine in the WAM application. This component calls the W1-CraftPOLine business object using the Inbound Web Service.
W1-EquipmentPOLine	Used to create, update, read, or delete EquipmentPOLine in the WAM application. This component calls the W1-EquipmentPOLine business object using the Inbound Web Service.
W1-EquipmentPRLine	Used to create, update, read, or delete EquipmentPRLine in the WAM application. This component calls the W1-EquipmentPRLine business object using the Inbound Web Service.
W1-Expedite	Used to create, update, read, or delete Expedite in the WAM application. This component calls the W1-Expedite business object using the Inbound Web Service.
W1-OtherResourcePOLine	Used to create, update, read, or delete OtherResourcePOLine in the WAM application. This component calls the W1-OtherResourcePOLine business object using the Inbound Web Service.
W1-POLineIntegration	Used to create, update, read, or delete POLineIntegration in the WAM application. This component calls the W1-POLineIntegration business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-POHeaderIntegration	Used to create, update, read, or delete POHeaderIntegration in the WAM application. This component calls the W1-POHeaderIntegration business object using the Inbound Web Service.
W1-PRCreBC	Used to create, update, read, or delete PRCreBC in the WAM application. This component calls the W1-PRCreBC business object using the Inbound Web Service.
W1-PRCrLine	Used to create, update, read, or delete PRCrLine in the WAM application. This component calls the W1-PRCrLine business object using the Inbound Web Service.
W1-PREqLine	Used to create, update, read, or delete PREqLine in the WAM application. This component calls the W1- PREqLine business object using the Inbound Web Service.
W1-PRHeader	Used to create, update, read, or delete PRHeader in the WAM application. This component calls the W1-PRHeader business object using the Inbound Web Service.
W1-PRORLine	Used to create, update, read, or delete PRORLine in the WAM application. This component calls the W1-PRORLine business object using the Inbound Web Service.
W1-PRSILine	Used to create, update, read, or delete PRSILine in the WAM application. This component calls the W1-PRSILine business object using the Inbound Web Service.
W1-PurchaseOrderHeader	Used to create, update, read, or delete PurchaseOrderHeader in the WAM application. This component calls the W1-PurchaseOrderHeader business object using the Inbound Web Service.
W1-StockItemPOLine	Used to create, update, read, or delete StockItemPOLine in the WAM application. This component calls the W1-StockItemPOLine business object using the Inbound Web Service.
W1-Vendor	Used to create, update, read, or delete Vendor in the WAM application. This component calls the W1-Vendor business object using the Inbound Web Service.
W1-VendorLocation	Used to create, update, read, or delete VendorLocation in the WAM application. This component calls the W1-VendorLocation business object using the Inbound Web Service.
W1-CMPOHSQL	Used to read a Purchase Order ID using an External ID. This component calls the CM-POHSQL business service using the ATW1CMPOHSQL Inbound Web Service.
W1-CMBlanketContractByBlanketContractHeaderInfo	Used to search Blanket contract by Blanket Contract Header Information. This component calls the CM-BCHDQ1 business service using Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CMBlanketContractByBlanketContractHeaderID	Used to search Blanket contract by Blanket Contract Header ID. This component calls the CM-BCHDQ2 business service using Inbound Web Service.
W1-CMBlanketContractByBlanketContractHeaderResourceType	Used to search Blanket contract by Blanket Contract Resource type details. This component calls the CM-BCHDQ3 business service using Inbound Web Service.
W1-CMPOByHeaderInfo	Used to search purchase order by header information. This component calls the CM-POQ1 business service using Inbound Web Service.
W1-CMPOByLineInfo	Used to search purchase order by line information. This component calls the CM-POQ2 business service using Inbound Web Service.
W1-CMPOByHeaderId	Used to search purchase order information using header ID. This component calls the CM-POQ3 business service using Inbound Web Service.
W1-CMPOByWorkOrder	Used to search purchase order by work order details. This component calls the CM-POQ4 business service using Inbound Web Service.
W1-PRPOHSQL	Used to fetch PO details for a specific PR. This component calls the CM-PRPOHSQL business service using Inbound Web Service.
W1-CMPRByHeaderInfo	Used to search purchase request by header information. This component calls the CM-PRHQ1 business service using Inbound Web Service.
W1-CMPRByLineInfo	Used to search purchase request by line information. This component calls the CM-PRHQ2 business service using Inbound Web Service.
W1-CMPRById	Used to search purchase request using identifiers. This component calls the CM-PRHQ3 business service using Inbound Web Service.
W1-CMPRByWOInfo	Used to search purchase request by work order information. This component calls the CM-PRHQ4 business service using Inbound Web Service.

Resource Management

Component	Description
W1-CMCrewShiftByServiceInfo	Used to search crew shift by service info in the WAM application. This component calls the CM-CRSHFQ1 business service using thee Inbound web service.
W1-CMCrewShiftByCrewInfo	Used to search crew shift by crew info in the WAM application. This component calls the CM-CRSHFQ2 business service using thee Inbound web service.
W1-CMCrewShiftByIndentifier	Used to search crew shift by identifier in the WAM application. This component calls the CM-CRSHFQ3 business service using thee Inbound web service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CMCrewShiftBySchdPlanInfo	Used to search crew shift by scheduled Plan information in the WAM application. This component calls the CM-CRSHFQ4 business service using thee Inbound web service.
W1-CMChangeReqByInfo	Used to search change request by information in the WAM application. This component calls the CM-CHGREQQ1 business service using thee Inbound web service.
W1-CMChangeReqByRelatedObj	Used to search change request by related object information in the WAM application. This component calls the CM-CHGREQQ2 business service using thee Inbound web service.
W1-CMChangeReqByIdentifier	Used to search change request by identifier in the WAM application. This component calls the CM-CHGREQQ3 business service using thee Inbound web service.

Self Service

Component	Description
C1-RetrieveServiceTask	Used to retrieve Service Task record. This component invokes the ATC1RetrieveServiceTask Inbound Web Service using the C1-RETSVCTSK Business Service. C1-ThirdPartyAcctVerificationTaskRead Used to read a Third Party Account Verification Task. This component invokes the ATC1ThirdPartyAcctVerifTask Inbound Web Service using the C1-ThirdPartyAcctVerifTaskRead Business Object.
C1-StartServiceRequestSAAdd	Used to add a Start Service Request SA record. This component invokes the ATC1StartServiceRequestSA Inbound Web Service using the C1-StartServiceRequestSA Business Object.
C1-StartServiceRequestSADelete	Used to delete a Start Service Request SA record. This component invokes the ATC1StartServiceRequestSA Inbound Web Service using the C1-StartServiceRequestSA Business Object.
C1-StartServiceRequestSARead	Used to read a Start Service Request SA record. This component invokes the ATC1StartServiceRequestSA Inbound Web Service using the C1-StartServiceRequestSA Business Object.
C1-StartServiceRequestSAUpdate	Used to update a Start Service Request SA record. This component invokes the ATC1StartServiceRequestSA Inbound Web Service using the C1-StartServiceRequestSA Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-StopServiceRequestSAAdd	Used to add a Stop Service Request SA record. This component invokes the ATC1StopServiceRequestSA Inbound Web Service using the C1-StopServiceRequestSA Business Object.
C1-StopServiceRequestSADelete	Used to delete a Stop Service Request SA record. This component invokes the ATC1StopServiceRequestSA Inbound Web Service using the C1-StopServiceRequestSA Business Object.
C1-StopServiceRequestSAUpdate	Used to update a Stop Service Request SA record. This component invokes the ATC1StopServiceRequestSA Inbound Web Service using the C1-StopServiceRequestSA Business Object.
C1-StopServiceRequestSARead	Used to read a Stop Service Request SA record. This component invokes the ATC1StopServiceRequestSA Inbound Web Service using the C1-StopServiceRequestSA Business Object.
C1-SSStartStopXferServiceTaskAdd	Used to add a Start Stop Transfer Service Task. This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStartStopXferServiceTaskDelete	Used to delete a Start Stop Transfer Service Task. This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStartStopXferServiceTaskRead	Used to read a Start Stop Transfer Service Task. This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStartStopXferServiceTaskUpdate	Used to update a Start Stop Transfer Service Task. This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSAddServiceRequestTypeAdd	Used to add Self-Service Add Service Request Type. This component invokes the ATC1-SSAddServiceRequestType Inbound Web Service using the C1-SSAddServiceRequestType Business Object.
C1-SSAddServiceRequestTypeDelete	Used to delete Self-Service Add Service Request Type. This component invokes the ATC1-SSAddServiceRequestType Inbound Web Service using the C1-SSAddServiceRequestType Business Object.
C1-SSAddServiceRequestTypeRead	Used to read Self-Service Add Service Request Type. This component invokes the ATC1-SSAddServiceRequestType Inbound Web Service using the C1-SSAddServiceRequestType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-SSAddServiceRequestTypeUpdate	Used to update Self-Service Add Service Request Type. This component invokes the ATC1-SSAddServiceRequestType Inbound Web Service using the C1-SSAddServiceRequestType Business Object.
C1-SSNewServiceRequestTypeAdd	Used to add Self-Service New Service Request Type. This component invokes the ATC1-SSNewServiceRequestType Inbound Web Service using the C1-SSNewServiceRequestType Business Object.
C1-SSNewServiceRequestTypeDelete	Used to delete Self-Service New Service Request Type. This component invokes the ATC1-SSNewServiceRequestType Inbound Web Service using the C1-SSNewServiceRequestType Business Object.
C1-SSNewServiceRequestTypeRead	Used to read Self-Service New Service Request Type. This component invokes the ATC1-SSNewServiceRequestType Inbound Web Service using the C1-SSNewServiceRequestType Business Object.
C1-SSNewServiceRequestTypeUpdate	Used to update Self-Service New Service Request Type. This component invokes the ATC1-SSNewServiceRequestType Inbound Web Service using the C1-SSNewServiceRequestType Business Object.
C1-SSStartStopXferServiceTaskAdd	Used to add a Start Stop Transfer Service Task. This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStartStopXferServiceTaskDelete	Used to delete a Start Stop Transfer Service Task. This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStartStopXferServiceTaskRead	Used to read a Start Stop Transfer Service Task. This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStartStopXferServiceTaskUpdate	Used to update a Start Stop Transfer Service Task. This component invokes the ATC1SSStartStopXferServiceTask Inbound Web Service using the C1-SSStartStopXferServiceTask Business Object.
C1-SSStopServiceRequestTypeAdd	Used to add Self-Service Stop Service Request Type. This component invokes the ATC1-SSStopServiceRequestType Inbound Web Service using the C1-SSStopServiceRequestType Business Object.
C1-SSStopServiceRequestTypeDelete	Used to delete Self-Service Stop Service Request Type. This component invokes the ATC1-SSStopServiceRequestType Inbound Web Service using the C1-SSStopServiceRequestType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-SSStopServiceRequestTypeRead	Used to read Self-Service Stop Service Request Type. This component invokes the ATC1-SSStopServiceRequestType Inbound Web Service using the C1-SSStopServiceRequestType Business Object.
C1-SSStopServiceRequestTypeUpdate	Used to Update Self-Service Stop Service Request Type. This component invokes the ATC1-SSStopServiceRequestType Inbound Web Service using the C1-SSStopServiceRequestType Business Object.
C1-SSTransferServiceReqTypeAdd	Used to add Self-Service Transfer Service Request Type. This component invokes the ATC1-SSTransferServiceReqType Inbound Web Service using the C1-SSTransferServiceReqType Business Object.
C1-SSTransferServiceReqTypeDelete	Used to delete Self-Service Transfer Service Request Type. This component invokes the ATC1-SSTransferServiceReqType Inbound Web Service using the C1-SSTransferServiceReqType Business Object.
C1-SSTransferServiceReqTypeRead	Used to read Self-Service Transfer Service Request Type. This component invokes the ATC1-SSTransferServiceReqType Inbound Web Service using the C1-SSTransferServiceReqType Business Object.
C1-SSTransferServiceReqTypeUpdate	Used to update Self-Service Transfer Service Request Type. This component invokes the ATC1-SSTransferServiceReqType Inbound Web Service using the C1-SSTransferServiceReqType Business Object.
C1-ThirdPartyAutoPaySetupAdd	Used to add a Third Party Auto Pay Setup. This component invokes the ATC1ThirdPartyAutoPaySetup Inbound Web Service using the C1-TPApaySet Service Script.
C1-ThirdPartyAutoPaySetupCancel	Used to cancel a Third Party Auto Pay Setup. This component invokes the ATC1ThirdPartyAutoPaySetup Inbound Web Service using the C1-TPApaySet Service Script.
C1-OneTimePaymentTaskRead	Used to read a One Time Payment Service Task. This component invokes the ATC1OneTimePaymentTask Inbound Web Service using the WX-OneTimePayTask Business Object.
C1-CCBOneTimeTaskTypeAdd	Used for adding a One Time Task Type record. This component invokes the ATC1CCBOneTimePaymentTaskType Inbound Web Service using the C1-OneTimePaymentTaskType Business Object.
C1-CCBOneTimeTaskTypeDelete	Used for deleting a One Time Task Type record. This component invokes the ATC1CCBOneTimePaymentTaskType Inbound Web Service using the C1-OneTimePaymentTaskType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-CCBOneTimeTaskTypeRead	Used for reading a One Time Task Type record. This component invokes the ATC1CCBOneTimePaymentTaskType Inbound Web Service using the C1-OneTimePaymentTaskType Business Object.
C1-CCBOneTimeTaskTypeUpdate	Used for updating a One Time Task Type record. This component invokes the ATC1CCBOneTimePaymentTaskType Inbound Web Service using the C1-OneTimePaymentTaskType Business Object
C1-SSStartStopXferServiceTaskTypeAdd	Used for adding Start Stop Transfer Service Task Type. This component invokes the ATC1SSStartStopXferSvcTaskType Inbound Web Service using the C1-SSStartStopXferSvcTaskType Business Object.
C1-SSStartStopXferServiceTaskTypeDelete	Used for deleting Start Stop Transfer Service Task Type. This component invokes the ATC1SSStartStopXferSvcTaskType Inbound Web Service using the C1-SSStartStopXferSvcTaskType Business Object.
C1-SSStartStopXferServiceTaskTypeRead	Used for reading Start Stop Transfer Service Task Type. This component invokes the ATC1SSStartStopXferSvcTaskType Inbound Web Service using the C1-SSStartStopXferSvcTaskType Business Object.
C1-ThirdPartyAutoPaySetupUpdate	Used to cancel a Third Party Auto Pay Setup. This component invokes the ATC1ThirdPartyAutoPaySetup Inbound Web Service using the C1-TPApaySet Service Script.
C1-AutoPayTaskRead	Used to read an Auto Pay Setup Service Task. This component invokes the ATC1AutoPayTask Inbound Web Service using the WX-AutoPayTask Business Object.
C1-ThirdPartyAutoPayTaskRead	Used to read a Third Party Auto Pay Task. This component invokes the ATC1ThirdPartyAutoPayTask Inbound Web Service using the C1-ThirdPartyAutoPayTask Business Object.
C1-BillingToDoDashboardConfigAdd	Used to add a Billing To Do Dashboard Config record. This component invokes the Business Object "C1-BillingToDoDashboardConfig" using the Inbound Web Service of ATC1BillingToDoDashboardConfig.
C1-BillingToDoDashboardConfigRead	Used to read a Billing To Do Dashboard Config record. This component invokes the Business Object "C1-BillingToDoDashboardConfig" using the Inbound Web Service of ATC1BillingToDoDashboardConfig.
C1-BillingToDoDashboardConfigUpdate	Used to update a Billing To Do Dashboard Config record. This component invokes the Business Object "C1-BillingToDoDashboardConfig" using the Inbound Web Service of ATC1BillingToDoDashboardConfig.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-OneTimePaymentTaskAdd	Used to add One Time Payment Service Task. This component invokes the WXMakePayment Inbound Web Service using the WX-OneTimePayTask Business Object.
C1-OneTimePaymentTaskRead	Used to read a One Time Payment Service Task. This component invokes the ATC1OneTimePaymentTask Inbound Web Service using the WX-OneTimePayTask Business Object.
C1-ThirdPartyOneTimePayNotifAdd	Used to add a Third Party One Time Payment. This component invokes the ATC1ThirdPartyPaymntIntegration Inbound Web Service using the C1-TPPayNotf Service Script.

Service Order Management

Component	Description
C1-ActivityInformation	Used to read an Activity Information. This component invokes the ATC1ActivityInformation Inbound Web Service using the C1-ActvtyInf Service Script.
C1-DeviceInformation	Used to retrieving the Device Information. This component invokes the ATC1DeviceInformation Inbound Web Service using the C1-DeviceInf Service Script.
C1-FACompletionMessage	Used for the FA Completion Message. This component invokes the ATC1FACompletionMessage Inbound Web Service using the C1-FACmplMsg Service Script.
C1-PremiseFAGTT	Used for inserting the Premise Activities to GTT. This component invokes the ATC1PremFAGTT Inbound Web Service using the C1-PremFAGTT Service Script.
C1-ServiceRequestUpdate	Used for updating a SOM Request. This component invokes the ATC1ServiceRequestUpdate Inbound Web Service using the C1-SvcReqUpd Service Script.

Service Task Type

Component	Description
C1-OutageCallTypeAdd	Used to add an Outage Call Type record. This component invokes the ATC1OutageCallType Inbound Web Service using the C1-OutageCallType Business Object.
C1-OutageCallTypeRead	Used to read an Outage Call Type record. This component invokes the ATC1OutageCallType Inbound Web Service using the C1-OutageCallType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-OutageCallTypeUpdate	Used to update an Outage Call Type record. This component invokes the ATC1OutageCallType Inbound Web Service using the C1-OutageCallType Business Object.
C1-OutageCallTypeDelete	Used to delete an Outage Call Type record. This component invokes the ATC1OutageCallType Inbound Web Service using the C1-OutageCallType Business Object.
C1-ThirdPartyAcctVerifTaskTypeAdd	Used to add a Third Party Account Verification Task Type. This component invokes the ATC1ThirdPartyAcctVerificationTaskType Inbound Web Service using the C1-ThirdPartyAcctVerifTaskType Business Object. C1-ThirdPartyAcctVerifTaskTypeDelete Used to delete a Third Party Account Verification Task Type. This component invokes the ATC1ThirdPartyAcctVerificationTaskType Inbound Web Service using the C1-ThirdPartyAcctVerifTaskType Business Object.
C1-ThirdPartyAcctVerifTaskTypeRead	Used to read a Third Party Account Verification Task Type. This component invokes the ATC1ThirdPartyAcctVerificationTaskType Inbound Web Service using the C1-ThirdPartyAcctVerifTaskType Business Object.
C1-ThirdPartyAcctVerifTaskTypeUpdate	Used to update a Third Party Account Verification Task Type. This component invokes the ATC1ThirdPartyAcctVerificationTaskType Inbound Web Service using the C1-ThirdPartyAcctVerifTaskType Business Object.
C1-ThirdPartyAutoPayTaskTypeAdd	Used to add a Third Party Auto Pay Task Type. This component invokes the ATC1ThirdPartyAutoPayTaskType Inbound Web Service using the C1-ThirdPartyAutoPayTaskType Business Object.
C1- ThirdPartyAutoPayTaskTypeDelete	Used to delete a Third Party Auto Pay Task Type. This component invokes the ATC1ThirdPartyAutoPayTaskType Inbound Web Service using the C1-ThirdPartyAutoPayTaskType Business Object.
C1-ThirdPartyAutoPayTaskTypeRead	Used to read a Third Party Auto Pay Task Type. This component invokes the ATC1ThirdPartyAutoPayTaskType Inbound Web Service using the C1-ThirdPartyAutoPayTaskType Business Object.
C1- ThirdPartyAutoPayTaskTypeUpdate	Used to update a Third Party Auto Pay Task Type. This component invokes the ATC1ThirdPartyAutoPayTaskType Inbound Web Service using the C1-ThirdPartyAutoPayTaskType Business Object.
C1- ThirdPartyOneTimePayTaskTypeAdd	Used to add a Third Party One Time Payment Task Type. This component invokes the ATC1ThirdPartyOneTimePyTaskType Inbound Web Service using the C1-ThirdPartyOneTimePyTaskType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-ThirdPartyOneTimePayTaskTypeDelete	Used to delete a Third Party One Time Payment Task Type. This component invokes the ATC1ThirdPartyOneTimePyTaskType Inbound Web Service using the C1-ThirdPartyOneTimePyTaskType Business Object.
C1-ThirdPartyOneTimePayTaskTypeRead	Used to delete a Third Party One Time Payment Task Type. This component invokes the ATC1ThirdPartyOneTimePyTaskType Inbound Web Service using the C1-ThirdPartyOneTimePyTaskType Business Object.
C1-ThirdPartyOneTimePayTaskTypeUpdate	Used to update a Third Party One Time Payment Task Type. This component invokes the ATC1ThirdPartyOneTimePyTaskType Inbound Web Service using the C1-ThirdPartyOneTimePyTaskType Business Object.
C1-AutoPayTaskTypeAdd	Used to add an Auto Pay Task Type. This component invokes the ATC1AutoPayTaskType Inbound Web Service using the WX-AutoPayTaskType Business Object.
C1-AutoPayTaskTypeDelete	Used to delete an Auto Pay Task Type. This component invokes the ATC1AutoPayTaskType Inbound Web Service using the WX-AutoPayTaskType Business Object.
C1-AutoPayTaskTypeRead	Used to read an Auto Pay Task Type. This component invokes the ATC1AutoPayTaskType Inbound Web Service using the WX-AutoPayTaskType Business Object.
C1-AutoPayTaskTypeUpdate	Used to update an Auto Pay Task Type. This component invokes the ATC1AutoPayTaskType Inbound Web Service using the WX-AutoPayTaskType Business Object.
C1-OneTimePaymentTaskTypeAdd	Used to add a One Time Payment Task Type. This component invokes the ATC1OneTimePaymentTaskType Inbound Web Service using the WX-OneTimePayTaskType Business Object.
C1-OneTimePaymentTaskTypeDelete	Used to delete a One Time Payment Task Type. This component invokes the ATC1OneTimePaymentTaskType Inbound Web Service using the WX-OneTimePayTaskType Business Object.
C1-OneTimePaymentTaskTypeRead	Used to read a One Time Payment Task Type. This component invokes the ATC1OneTimePaymentTaskType Inbound Web Service using the WX-OneTimePayTaskType Business Object.
C1-OneTimePaymentTaskTypeUpdate	Used to update a One Time Payment Task Type. This component invokes the ATC1OneTimePaymentTaskType Inbound Web Service using the WX-OneTimePayTaskType Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-BankAcctApaySetupTaskTypeAdd	Used to add a Bank Account Auto Pay Set Up Task Type. This component invokes the ATC1BankAcctApaySetupTaskType Inbound Web Service using the C1-BankAcctApaySetupTaskType Business Object.
C1-BankAcctApaySetupTaskTypeRead	Used to read a Bank Account Auto Pay Set Up Task Type. This component invokes the ATC1BankAcctApaySetupTaskType Inbound Web Service using the C1-BankAcctApaySetupTaskType Business Object.
C1-BankAcctApaySetupTaskTypeUpdate	Used to update a Bank Account Auto Pay Set Up Task Type. This component invokes the ATC1BankAcctApaySetupTaskType Inbound Web Service using the C1-BankAcctApaySetupTaskType Business Object.
C1-BankAcctApaySetupTaskTypeDelete	Used to delete a Bank Account Auto Pay Setup Task Type. This component invokes the ATC1BankAcctApaySetupTaskType Inbound Web Service using the C1-BankAcctApaySetupTaskType Business Object.

SMDF Admin Data

Component	Description
D2-SubIntAdjustmentVEE	Performs adjustments to consumption; the changes to consumption will be validated against the readings contained prior to and subsequent to the change made. This component invokes the D2-SubIntAdjustmentVEE Business Object using the ATD2SubIntAdjustmentVEE Inbound Web Service.
D1-VEEGroup	Used to create a VEE Group. This component invokes the D1-VEEGroup Business Object using the ATD1VEEGroup Inbound Web Service.
D2-NegativeConsumptionCheck	Used to create a Negative-Consumption Check VEE Rule. This component invokes the D2-NegativeConsumptionCheck Business Object using the ATD2NegativeConsumptionCheck Inbound Web Service.
D2-RegisterMultiplierCheck	Used to create a Multiplier Check VEE Rule. This component invokes the D2-RegisterMultiplierCheck Business Object using the ATD2RegisterMultiplierCheck Inbound Web Service.
D2-IntervalReplacementRule	Used to create an IntervalReplacementRule VEE rule. This component invokes the D2-IntervalReplacementRule Business Object using the ATD2IntervalReplacementRule Inbound Web Service.
D2-IntervalSpikeCheck	Used to create an IntervalSpikeCheck VEE rule. This component invokes the D2-IntervalSpikeCheck Business Object using the ATD2IntervalSpikeCheck Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D2-ScalarReplacementRule	Used to create a ScalarReplacementRule VEE rule. This component invokes the D2-ScalarReplacementRule Business Object using the ATD2ScalarReplacementRule Inbound Web Service.
D1-VEERuleSuccessTermination	Used to create a VEERuleSuccessTermination VEE rule. This component invokes the D1-VEERuleSuccessTermination Business Object using the ATD1VEERuleSuccessTermination Inbound Web Service.
D2-IntervalAveragingEstimation	Describes Interval Averaging Estimation. This component invokes the D2-IntervalAveragingEstimation Business Object using the ATD2IntervalAveragingEstimation Inbound Web Service.
D2-IntervalProfileEstimation	Describes Interval Profile Estimation. This component invokes the D2-IntervalProfileEstimation Business Object using the ATD2IntervalProfileEstimation Inbound Web Service.
D2-IntervalSizeValidation	Describes Interval Size Validation. This component invokes the D2-IntervalSizeValidation Business Object using the ATD2IntervalSizeValidation Inbound Web Service.
D2-RaiseMissingQuantityExcp	Describes Raise Missing Quantity Exception. This component invokes the D2-RaiseMissingQuantityExcp Business Object using the ATD2RaiseMissingQuantityExcp Inbound Web Service.
D1-VEERuleReferredVEEGroup	Calls the VEE processor to execute the rules for the VEE group configured on the rule. This component invokes the D1-VEERuleReferredVEEGroup Business Object using the ATD1VEERuleReferredVEEGroup Inbound Web Service.
D2-SSMeterReadTaskType	Holds the default values such as measurement condition, service provider, and data source used in self-service meter read creation. To Do type and role, if specified will be used when reporting errors that occur during IMD creation. This component invokes the D2-SSMeterReadTaskType Business Object using the ATD2SSMeterReadTaskType Inbound Web Service.
D2-ProlongedEstimationCheck	Describes ProlongedEstimationCheck. This component invokes the D2-ProlongedEstimationCheck Business Object using the ATD2 ProlongedEstimationCheck Inbound Web Service.
D1-DuplicateIMDCheck	Checks whether the current IMD is a duplicate of one already received for the same measuring component. This component produces a VEE exception of the type and severity defined on the rule when it is configured. It invokes the D1-DuplicateIMDCheck Business Object using the ATD1DuplicateIMDCheck Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-VEERuleGroupFactor	Describes the VEE Rule group factor. This component invokes the D1-VEERuleGroupFactor Business Object using the ATD1VEERuleGroupFactor Inbound Web Service.
D2-FinalMeasurementValidation	Describes the Final Measurement Validation. This component invokes the D2-FinalMeasurementValidation Business Object using the ATD2FinalMeasurementValidation Inbound Web Service.
D2-ScalarProfileEstimation	Used to create a ScalarProfileEstimation VEE Rule. This component invokes the D2-ScalarProfileEstimation Business Object using the ATD2ScalarProfileEstimation Inbound Web Service.
D2-SumCheck	Used to create a SumCheck VEE Rule. This component invokes the D2-SumCheck Business Object using the ATD2SumCheck Inbound Web Service.
D2-ScalarCalcFromInterval	Describes Scalar Calculation from Interval. This component invokes the D2-ScalarCalcFromInterval Business Object using the ATD2ScalarCalcFromInterval Inbound Web Service.
D2-ScalarEstimation	Describes the Describes Scalar Estimation VEE Rule. This component invokes the D2-ScalarEstimation Business Object using the ATD2ScalarEstimation Inbound Web Service.
D2-UOMCheck	Used to create UOM Check VEE rule. This component invokes the D2-UOMCheck Business Object using the ATD2UOMCheck Inbound Web Service.
D2-ZeroConsumptionCheck	Used to create Zero Consumption Check VEE rule. This component invokes the D2-ZeroConsumptionCheck Business Object using the ATD2ZeroConsumptionCheck Inbound Web Service.
D1-VEERuleExceptionHandler	Used to create a VEERuleExceptionHandler VEE Rule. This component invokes the D1-VEERuleExceptionHandler Business Object using the ATD1VEERuleExceptionHandler Inbound Web Service.
D2-EnsureIMDExistsForSibling	Used to create a EnsureIMDExistsForSibling VEE rule. This component invokes the D2-EnsureIMDExistsForSibling Business Object using the ATD2EnsureIMDExistsForSibling Inbound Web Service.
D2-IntervalAdjustmentFrmScalar	Used to create a IntervalAdjustmentFrmScalar VEE rule. This component invokes the D2-IntervalAdjustmentFrmScalar Business Object using the ATD2IntervalAdjustmentFrmScalar Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D2-IntervalInterpolationEst	Used to create an IntervalInterpolationEst VEE rule. This component invokes the D2-IntervalInterpolationEst Business Object using the ATD2IntervalInterpolationEst Inbound Web Service.
D2-GetSubtractiveInterval	Allows the configuration of subtractive interval data retrieval during usage transaction processing. The rule records service quantities per service point and measuring component - which means that subtractive interval curves for different measuring components. This component invokes the D2-GetSubtractiveInterval Business Object using the ATD2GetSubtractiveInterval Inbound Web Service.
D1-MeterReadDownloadActType	Used to create a MeterReadDownloadActType Activity Type. This component invokes the D1-MeterReadDownloadActType Business Object using the ATD1MeterReadDownloadActType Inbound Web Service.
D1-PairedEventLastDvcEvtType	Used to create a PairedEventLastDvcEvtType Device Event Type. This component invokes the D1-PairedEventLastDvcEvtType Business Object using the ATD1PairedEventLastDvcEvtType Inbound Web Service.
D1-StandardDeviceEventType	Used to create a StandardDeviceEventType Device Event Type. This component invokes the D1-StandardDeviceEventType Business Object using the ATD1StandardDeviceEventType Inbound Web Service.
D1-UTCorrectnPrcessrActvtyType	Defines the activity BO to use in the creation of a Usage Transaction Correction Processor. This component also defines the general category of these activities as a Correction Processor. The component invokes the D1-UTCorrectnPrcessrActvtyType Business Object using the ATD1UTCorrectnPrcessrActvtyType Inbound Web Service.
D1-RemoteConnectType	Describes configuration parameters required for the Remote Connect command activity, including automated retry and command time-out options. This component allows the definition of a Service Issue Monitor Type resulting in the creation of a Service Issue Monitor of the configured type if a Remote Connect command activity has failed. The component invokes the D1-RemoteConnectType Business Object using the ATD1RemoteConnectType Inbound Web Service.
D1-PairedEventFirstDvcEvtType	Describes the Device Event Type - Paired Event (First). This component invokes the D1-PairedEventFirstDvcEvtType Business Object using the ATD1PairedEventFirstDvcEvtType Inbound Web Service.
D1-DeviceWithDurationActType	Describes the Device Activity with Duration Type. This component invokes the D1-DeviceWithDurationActType Business Object using the ATD1DeviceWithDurationActType Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D2-SubMeasurementAggType	Describes the Sub Measurement Aggregator Type. This component invokes the D2-SubMeasurementAggType Business Object using the ATD2SubMeasurementAggType Inbound Web Service.
D2-MasterMsrmtAggregatorType	Describes the Master Measurement Aggregator Type. This component invokes the D2-MasterMsrmtAggregatorType Business Object using the ATD2MasterMsrmtAggregatorType Inbound Web Service.
D2-ActivityTypeAggDimScanner	Describes the Aggregator Dimension Scanner Activity Type. This component invokes the D2-ActivityTypeAggDimScanner Business Object using the ATD2ActivityTypeAggDimScanner Inbound Web Service.
D2-AggregatorType	Used to create an AggregatorType Measuring Component Type. This component invokes the D2-AggregatorType Business Object using the ATD2AggregatorType Inbound Web Service.
D1-IntervalPriceType	Used to create a IntervalPriceType. This component invokes the D1-IntervalPriceType Business Object using the ATD1IntervalPriceType Inbound Web Service.
D1-IntervalChannelTypePhysical	Used to create a IntervalChannelTypePhysical. This component invokes the D1-IntervalChannelTypePhysical Business Object using the ATD1IntervalChannelTypePhysical Inbound Web Service.
D1-IntervalChannelTypeExternal	Used to create a IntervalChannelTypeExternal. This component invokes the D1-IntervalChannelTypeExternal Business Object using the ATD1IntervalChannelTypeExternal Inbound Web Service.
D1-ScalarChannelTypeExternal	Used to create a ScalarChannelTypeExternal. This component invokes the D1-ScalarChannelTypeExternal Business Object using the ATD1ScalarChannelTypeExternal Inbound Web Service.
D1-BulkCommandProcessor	Used to create a Bulk Command Processor. This component invokes the D1-BulkCommandProcessor Business Object using the ATD1BulkCommandProcessor Inbound Web Service.
D1-ChannelCountMetric	Used to create a ChannelCountMetric. This component invokes the D1-ChannelCountMetric Business Object using the ATD1ChannelCountMetric Inbound Web Service.
D1-DeviceCountMetric	Used to create a DeviceCountMetric. This component invokes the D1-DeviceCountMetric Business Object using the ATD1DeviceCountMetric Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-MeasurementCycleSchedule	Used to create a MeasurementCycleSchedule. This component invokes the D1-MeasurementCycleSchedule Business Object using the ATD1MeasurementCycleSchedule Inbound Web Service.
D1-ReaderRemarkType	Used to create a ReaderRemarkType. This component invokes the D1-ReaderRemarkType Business Object using the ATD1ReaderRemarkType Inbound Web Service.
D1-ServiceIssueMonitorType	Used to create a ServiceIssueMonitorType. This component invokes the D1-ServiceIssueMonitorType Business Object using the ATD1ServiceIssueMonitorType Inbound Web Service.
D2-MsrmtQuantityAggScannerType	Used to create a MsrmtQuantityAggScannerType. This component invokes the D2-MsrmtQuantityAggScannerType Business Object using the ATD2MsrmtQuantityAggScannerType Inbound Web Service.
D2-TOUGroup	Used to create a TOUGroup. This component invokes the D2-TOUGroup Business Object using the ATD2TOUGroup Inbound Web Service.
D2-VEERuleHighLowCheck	Used to create a VEERuleHighLowCheck. This component invokes the D2-VEERuleHighLowCheck Business Object using the ATD2VEERuleHighLowCheck Inbound Web Service.
D1-HowToCreateMCInformation	Used to create a HowToCreateMCInformation. This component invokes the D1-HowToCreateMCInformation Business Object using the ATD1HowToCreateMCInformation Inbound Web Service.
D1-HowToSendActivityResponse	Used to create a HowToSendActivityResponse. This component invokes the D1-HowToSendActivityResponse Business Object using the ATD1HowToSendActivityResponse Inbound Web Service.
D1-AvgDailyEstItemConsumption	Used to create a AvgDailyEstItemConsumption. This component invokes the D1-AvgDailyEstItemConsumption Business Object using the ATD1AvgDailyEstItemConsumption Inbound Web Service.
D1-VEEEligibilityCriteria	Used to create a VEEEligibilityCriteria. This component invokes the D1-VEEEligibilityCriteria Business Object using the ATD1VEEEligibilityCriteria Inbound Web Service.
D2-VerifyUomTouSqiMCExistForUs	Used to create a VerifyUomTouSqiMCExistForUs. This component invokes the D2-VerifyUomTouSqiMCExistForUs Business Object using the ATD2VerifyUomTouSqiMCExistForUs Inbound Web Service.
D1-DeviceEventSeeder	Used to create a DeviceEventSeeder. This component invokes the D1-DeviceEventSeeder Business Object using the ATD1DeviceEventSeeder Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-FieldActivity	Used to create a FieldActivity. This component invokes the D1-FieldActivity Business Object using the ATD1FieldActivity Inbound Web Service.
D1-ReaderRemark	Used to create a ReaderRemark. This component invokes the D1-ReaderRemark Business Object using the ATD1ReaderRemark Inbound Web Service.
D1-TimeZoneTranslationLookup	Used to create a TimeZoneTranslationLookup. This component invokes the D1-ATD1TimeZoneTranslationLookup Business Object using the ATD1ReaderRemark Inbound Web Service.
D2-UsageCalculationGroupLookup	Used to create a UsageCalculationGroupLookup. This component invokes the D2-UsageCalculationGroupLookup Business Object using the ATD2UsageCalculationGroupLookup Inbound Web Service.
D2-MDMMasterConfig	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig. This component invokes the D2-MDMMasterConfig Business Object using the ATD2MDMMasterConfig Inbound Web Service.
D2-MDMMasterConfig	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MDMMasterConfig. This component invokes the D2-MDMMasterConfig Business Object using the ATD2MDMMasterConfig Inbound Web Service.
D2-MtrCommTrckngAggregatorType	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MtrCommTrckngAggregatorType. This component invokes the D2-MtrCommTrckngAggregatorType Business Object using the ATD2MtrCommTrckngAggregatorType Inbound Web Service.
D1-EstimationSuppressionType	Used to perform actions such as ADD, READ, UPDATE, and DELETE a EstimationSuppressionType. This component invokes the D1-EstimationSuppressionType Business Object using the ATD1EstimationSuppressionType Inbound Web Service.
D2-InactiveMeasurementCheck	Used to perform actions such as ADD, READ, UPDATE, and DELETE a InactiveMeasurementCheck VEE Rule. This component invokes the D1-InactiveMeasurementCheck Business Object using the ATD2InactiveMeasurementCheck Inbound Web Service.
D1-ChannelStatisticsType	Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatisticsType. This component invokes the D1-ChannelStatisticsType Business Object using the ATD1ChannelStatisticsType Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-ChannelStatistics	Used to perform actions such as ADD, READ, UPDATE, and DELETE a ChannelStatistics. This component invokes the D1- ChannelStatistics Business Object using the ATD1ChannelStatistics Inbound Web Service.
D1-FacilityLite	Used to perform actions such as ADD, READ, UPDATE, and DELETE a FacilityLite. This component invokes the D1- FacilityLite Business Object using the ATD1FacilityLite Inbound Web Service.
D1-SpecificationLookup	Used to perform actions such as ADD, READ, UPDATE, and DELETE a SpecificationLookup. This component invokes the D1-SpecificationLookup Business Object using the ATD1SpecificationLookup Inbound Web Service.
D1-MeasuringCompTypLite	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MeasuringCompTypLite. This component invokes the D1-MeasuringCompTypLite Business Object using the ATD1MeasuringCompTypLite Inbound Web Service.
D1-GetDvcFrmIdenTypFlag	Used to retrieve Device ID By Identifier and Type Flag using the ATD1 GetDvcFrmIdenTypFlag Inbound Web Service.
D1-GetSimdIdFromImd	Used to retrieve Simd ID By IMD ID using the ATD1GetSimdIdFromImd Inbound Web Service.
D1-GetMCFrmDvcExtId	Used to retrieve Measuring Component ID from Device External ID using the ATD1GetMCFrmDvcExtId Inbound Web Service.
D1-GetProductKeyFromSync	Used to Get Product Key from Sync Request ID using the ATD1 GetProductKeyFromSync Inbound Web Service.
D1-GetUsageFromExtID	Used to retrieve Usage ID from CCB Usage ID using the ATD1 GetUsageFromExtID Inbound Web Service.
D2-GetUSFromExtID	Used to retrieve US ID from External ID using the ATD1 GetUSFromExtID Inbound Web Service.
D1-GetDCFrmDvcExtId	Used to retrieve DC ID from External ID using the ATD1GetDCFrmDvcExtId Inbound Web Service.
D1-GetInstEvtFromDvcExId	Used to retrieve Install Event ID from Device External ID using ATD1GetInstEvtFromDvcExId Inbound Web Service.
D1-GetInstEvtFrmSPExtId	Used to retrieve Install Event ID from Service Point External ID using the ATD1GetInstEvtFrmSPExtId Inbound Web Service.
D1-GetMCFromExtID	Used to retrieve Measuring Component ID from External ID using the ATD1GetMCFromExtID Inbound Web Service.
D1-GetContactFromExtID	Used to retrieve Contact ID from External ID using the ATD1GetContactFromExtID Inbound Web Service.
D1-GetSpFromExtID	Used to retrieve Service Point ID from External ID using the ATD1GetSpFromExtID Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-GetSyncReqIdFrmExtId	Used to retrieve Sync Request ID from External ID using the ATD1GetSyncReqIdFrmExtId Inbound Web Service.

SMDF Master Data

Component	Description
D2-MtrCommTrckgDimScanner	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MtrCommTrckgDimScanner. This component invokes the D2-MtrCommTrckgDimScanner Business Object using the ATD2MtrCommTrckgDimScanner Inbound Web Service.
D2-MtrCommTrckgDimScanner	Used to perform actions such as ADD, READ, UPDATE, and DELETE a MtrCommTrckgDimScanner. This component invokes the D2-MtrCommTrckgDimScanner Business Object using the ATD2MtrCommTrckgDimScanner Inbound Web Service.
D1-EstimationSuppression	Used to perform actions such as ADD, READ, UPDATE, and DELETE a EstimationSuppression. This component invokes the D2-EstimationSuppression Business Object using the ATD2EstimationSuppression Inbound Web Service.
D1-InitialLoadIMDSubtrInterval	Used to perform actions such as ADD, READ, UPDATE, and DELETE a InitialLoadIMDSubtrInterval. This component invokes the D1-InitialLoadIMDSubtrInterval Business Object using the ATD1InitialLoadIMDSubtrInterval Inbound Web Service.
D1-EstimationIMDSubtrInterval	Used to perform actions such as ADD, READ, UPDATE, and DELETE a EstimationIMDSubtrInterval. This component invokes the D1-EstimationIMDSubtrInterval Business Object using the ATD1EstimationIMDSubtrInterval Inbound Web Service.
D1-ManualIMDSubtrInterval	Used to perform actions such as ADD, READ, UPDATE, and DELETE a ManualIMDSubtrInterval. This component invokes the D1-ManualIMDSubtrInterval Business Object using the ATD1ManualIMDSubtrInterval Inbound Web Service.
D1-SystemIMDSubtrInterval	Used to perform actions such as ADD, READ, UPDATE, and DELETE a SystemIMDSubtrInterval. This component invokes the D1-SystemIMDSubtrInterval Business Object using the ATD1SystemIMDSubtrInterval Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
D1-IntervalPriceSet	Used to perform actions such as ADD, READ, UPDATE, and DELETE a IntervalPriceSet. This component invokes the D1-IntervalPriceSetBusiness Object using the ATD1IntervalPriceSet Inbound Web Service.
D1-SubtractveIntvalMeasurement	Used to perform actions such as ADD, READ, UPDATE, and DELETE a SubtractveIntvalMeasurement. This component invokes the D1-SubtractveIntvalMeasurement Business Object using the ATD1SystemIMDSubtrInterval Inbound Web Service.
D1-IntrvlChanTypPhysSubtractiv	Used to perform actions such as ADD, READ, UPDATE, and DELETE a IntrvlChanTypPhysSubtractiv. This component invokes the D1-IntrvlChanTypPhysSubtractiv Business Object using the ATD1IntrvlChanTypPhysSubtractiv Inbound Web Service.
D1-IntervalChannelSubtractive	Used to perform actions such as ADD, READ, UPDATE, and DELETE a IntervalChannelSubtractive. This component invokes the D1-IntervalChannelSubtractive Business Object using the ATD1IntervalChannelSubtractive Inbound Web Service.
X1-RetrieveDeviceConfigId	Used to retrieve Device Configuration ID. This component invokes the ATX1RetrieveDeviceConfigID Inbound Web Service using the X1-RETDCFGID Business Service.
X1-RetrieveMesuringComponentId	Used to retrieve Measuring Component ID. This component invokes the ATX1RetrieveMeasuringComponentId Inbound Web Service using D1-RETMEACID Business Service.
X1-CreateIntervalFunction	Used to add/create Override Interval Reads. This component invokes the ATX1RCreateIntervalFunction Inbound Web Service using D2-OvrIntBck Service Script.

Usage

Component	Description
C1-GetUsageId	Used to get the usage request ID of given a person name. This component invokes the ATC1GetUsageId Inbound Web Service using the C1-GetUsageId Business Service.
C1-UsageReqCyclicalBillingRead	Used to read a Usage Request Cyclical Billing record. This component invokes the ATC1UsageReqCyclicalBillingRead Inbound Web Service using the C1-UsageRequestCyclicalBilling Business Object.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
C1-UsageRequestNonCyclicalRead	Used to read a Usage Request Non-Cyclical Billing record. This component invokes the ATC1UsageRequestNonCyclical Inbound Web Service using the C1-UsageRequestNonCyclical Business Object.
X1-UsageAndChargeRequestAdd	Used to add a Usage and Charge Request record. This component invokes the ATX1UsageAndChargeRequest Inbound Web Service using the X1-UsageAndChargeRequest Business Object.
X1-UsageAndChargeRequestDelete	Used to delete a Usage and Charge Request record. This component invokes the ATX1UsageAndChargeRequest Inbound Web Service using the X1-UsageAndChargeRequest Business Object.
X1-UsageAndChargeRequestRead	Used to read a Usage and Charge Request record. This component invokes the ATX1UsageAndChargeRequest Inbound Web Service using the X1-UsageAndChargeRequest Business Object.
X1-UsageAndChargeRequestUpdate	Used to update a Usage and Charge Request record. This component invokes the ATX1UsageAndChargeRequest Inbound Web Service using the X1-UsageAndChargeRequest Business Object.
X1-VectorMathNonMeterAdd	Used to add a Usage and Charge Request record. This component invokes the ATX1VectorMathNonMeter Inbound Web Service using the X1-VectorMathNonMeter Business Object.
X1-VectorMathNonMeterDelete	Used to delete a Usage and Charge Request record. This component invokes the ATX1VectorMathNonMeter Inbound Web Service using the X1-VectorMathNonMeter Business Object.
X1-VectorMathNonMeterRead	Used to read a Usage and Charge Request record. This component invokes the ATX1VectorMathNonMeter Inbound Web Service using the X1-VectorMathNonMeter Business Object.
X1-VectorMathNonMeterUpdate	Used to update a Usage and Charge Request record. This component invokes the ATX1VectorMathNonMeter Inbound Web Service using the X1-VectorMathNonMeter Business Object.

Work Management

Component	Description
W1-ActivityComplInboundComm	Used to create, update, read, or delete ActivityComplInboundComm in the WAM application. This component calls the W1-ActivityComplInboundComm business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-ServiceHistoryParticipant	Used to create, update, read, or deleteServiceHistoryParticipant in the WAM application. This component calls the W1-ServiceHistoryParticipant business object using the Inbound Web Service.
W1-ShiftHours	Used to read ShiftHours in the WAM application. This component calls the W1-ShiftHours business service using the Inbound Web Service.
W1-RCMSchedule	Used to create, update, read, or delete RCMSchedule in the WAM application. This component calls the W1-RCMSchedule business object using the Inbound Web Service.
W1-PtNotes	Used to create, update, read, or delete PtNotes in the WAM application. This component calls the W1-PtNotes business object using the Inbound Web Service.
W1-ProjectMgmntIntegMstConfig	Used to create, update, read, or delete ProjectMgmntIntegMstConfig in the WAM application. This component calls the W1-ProjectMgmntIntegMstConfig business object using the Inbound Web Service.
W1-PmtNotes	Used to create, update, read, or delete PmtNotes in the WAM application. This component calls the W1-PmtNotes business object using the Inbound Web Service.
W1-PermitChecklist	Used to create, update, read, or delete PermitChecklist in the WAM application. This component calls the W1-PermitChecklist business object using the Inbound Web Service.
W1-PRJWD	Used to read PRJWD in the WAM application. This component calls the W1-PRJWDbusiness service using the Inbound Web Service.
W1-PRJTMST	Used to read PRJTMST in the WAM application. This component calls the W1-PRJTMSTbusiness service using the Inbound Web Service.
W1-PRJPOLINE	Used to read PRJPOLINE in the WAM application. This component calls the W1-PRJPOLINEbusiness service using the Inbound Web Service.
W1-PIHeader	Used to create, update, read, or delete PIHeader in the WAM application. This component calls the W1-PIHeader business object using the Inbound Web Service.
W1-InternalPermit	Used to create, update, read, or delete InternalPermit in the WAM application. This component calls the W1-InternalPermit business object using the Inbound Web Service.
W1-FollowUpSkippedAssetsCmpEvt	Used to create, update, read, or delete FollowUpSkippedAssetsCmpEvt in the WAM application. This component calls the W1-FollowUpSkippedAssetsCmpEvt business object using the Inbound Web Service.
W1-ExternalPermit	Used to create, update, read, or delete ExternalPermit in the WAM application. This component calls the W1-ExternalPermit business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-EventTrigger	Used to create, update, read, or delete EventTrigger in the WAM application. This component calls the W1-EventTrigger business object using the Inbound Web Service.
W1-OperationMaintSpec	Used to create, update, read, or delete OperationMaintSpec in the WAM application. This component calls the W1-OperationMaintSpec business object using the Inbound Web Service.
W1-MobileStoreroomInventory	Used to create, update, read, or delete MobileStoreroomInventory in the WAM application. This component calls the W1-MobileStoreroomInventory business object using the Inbound Web Service.
W1-MassUpd	Used to createMassUpd in the WAM application. This component calls the W1-MassUpd service script using the Inbound Web Service.
W1-InternalPermit	Used to create, update, read, or delete InternalPermit in the WAM application. This component calls the W1-InternalPermit business object using the Inbound Web Service.
W1-EventSchedule	Used to create, update, read, or delete EventSchedule in the WAM application. This component calls the W1-EventSchedule business object using the Inbound Web Service.
W1-DowntimeFailureRuntimCmpEvt	Used to create, update, read, or delete DowntimeFailureRuntimCmpEvt in the WAM application. This component calls the W1-DowntimeFailureRuntimCmpEvt business object using the Inbound Web Service.
W1-ActivityEquipRequirement	Used to create, update, read, or delete ActivityEquipRequirement in the WAM application. This component calls the W1-ActivityEquipRequirement business object using the Inbound Web Service.
W1-TrnAssetRcdMsrmtCmplEvt	Used to create, update, read, or delete TrnAssetRcdMsrmtCmplEvt in the WAM application. This component calls the W1-TrnAssetRcdMsrmtCmplEvt business object using the Inbound Web Service.
W1-ActivityLaborRequirement	Used to create, update, read, or delete ActivityLaborRequirement in the WAM application. This component calls the W1-ActivityLaborRequirement business object using the Inbound Web Service.
W1-SynchronizeMobileStoreroomDetails	Used to create, update, read, or deleteSynchronizeMobileStoreroomDetails in the WAM application. This component calls the W1-SynchronizeMobileStoreroomDetails business object using the Inbound Web Service.
W1-DetermineMaintTrigger	Used to read DetermineMaintTrigger in the WAM application. This component calls the W1-DetermineMaintTrigger business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CreSvcHstDocumentCmpEvt	Used to create, update, read, or delete CreSvcHstDocumentCmpEvt in the WAM application. This component calls the W1-CreSvcHstDocumentCmpEvt business object using the Inbound Web Service.
W1-CMWorkReqInformation	Used to read CMWorkReqInformation in the WAM application. This component calls the W1-CMWorkReqInformation business service using the Inbound Web Service.
W1-CMWorkReqIdentifier	Used to read CMWorkReqIdentifier in the WAM application. This component calls the W1-CMWorkReqIdentifier business service using the Inbound Web Service.
W1-CMWorkActivityInformation	Used to read CMWorkActivityInformation in the WAM application. This component calls the W1-CMWorkActivityInformation business object using the Inbound Web Service.
W1-CMWRWORKDUP	Used to read CMWRWORKDUP in the WAM application. This component calls the W1-CMWRWORKDUP business service using the Inbound Web Service.
W1-CMWOWASHSQL	Used to read CMWOWASHSQL in the WAM application. This component calls the W1-CMWOWASHSQL business service using the Inbound Web Service.
W1-CMWOWASCSQL	Used to read CMWOWASCSQL in the WAM application. This component calls the W1-CMWOWASCSQL business service using the Inbound Web Service.
W1-CMWOWAPMSQL	Used to read CMWOWAPMSQL in the WAM application. This component calls the W1-CMWOWAPMSQL business service using the Inbound Web Service.
W1-CMWOByInformation	Used to read CMWOByInformation in the WAM application. This component calls the W1-CMWOByInformation business service using the Inbound Web Service.
W1-CMWOBYID	Used to read CMWOBYID in the WAM application. This component calls the W1-CMWOBYID business service using the Inbound Web Service.
W1-CMServiceCallInformation	Used to read CMServiceCallInformation in the WAM application. This component calls the W1-CMServiceCallInformation business service using the Inbound Web Service.
W1-CMServiceCallIdentifier	Used to read CMServiceCallIdentifier in the WAM application. This component calls the W1-CMServiceCallIdentifier business service using the Inbound Web Service.
W1-CMPRJWO	Used to read CMPRJWO in the WAM application. This component calls the W1-CMPRJWO business service using the Inbound Web Service.
W1-CMPRJWACT	Used to read CMPRJWACT in the WAM application. This component calls the W1-CMPRJWACT business service using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CMLnkPmCkls	Used to execute CMLnkPmCkls in the WAM application. This component calls the W1-CMLnkPmCklsservice script using the Inbound Web Service.
W1-CMActivityWorkWindow	Used to read CMActivityWorkWindow in the WAM application. This component calls the W1-CMActivityWorkWindow business service using the Inbound Web Service.
W1-CMActivityLocation	Used to read CMActivityLocation in the WAM application. This component calls the W1-CMActivityLocation business service using the Inbound Web Service.
W1-CMActivityIdentifier	Used to read CMActivityIdentifier in the WAM application. This component calls the W1-CMActivityIdentifier business service using the Inbound Web Service.
W1-CMAcNoteMnt	Used to execute CMAcNoteMnt in the WAM application. This component calls the W1-CMAcNoteMnt service script using the Inbound Web Service.
W1-ActivityNotes	Used to update, read, or delete ActivityNotes in the WAM application. This component calls the W1-ActivityNotes business object using the Inbound Web Service.
W1-ActivityMaterialUsage	Used to execute ActivityMaterialUsage in the WAM application. This component calls the W1-ActivityMaterialUsage service script using the Inbound Web Service.
W1-ActAstLst	Used to execute ActAstLst in the WAM application. This component calls the W1-ActAstLst service script using the Inbound Web Service.
W1-ACfgDeviceUpgrade	Used to create, update, read, or delete ACfgDeviceUpgrade in the WAM application. This component calls the W1-ACfgDeviceUpgrade business object using the Inbound Web Service.
W1-ActivityMaterialRequirement	Used to create, update, read, or delete ActivityMaterialRequirement in the WAM application. This component calls the W1-ActivityMaterialRequirement business object using the Inbound Web Service.
W1-ACCfgDeviceUpgrade	Used to create, update, read, or delete ACCfgDeviceUpgrade in the WAM application. This component calls the W1-ACCfgDeviceUpgrade business object using the Inbound Web Service.
W1-ACACfgDeviceUpgrade	Used to create, update, read, or delete ACACfgDeviceUpgrade in the WAM application. This component calls the W1-ACACfgDeviceUpgrade business object using the Inbound Web Service.
W1-ACACCfgDeviceUpgrade	Used to create, update, read, or delete ACACCfgDeviceUpgrade in the WAM application. This component calls the W1-ACACCfgDeviceUpgrade business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-AACfgDeviceUpgrade	Used to create, update, read, or delete AACfgDeviceUpgrade in the WAM application. This component calls the W1-AACfgDeviceUpgrade business object using the Inbound Web Service.
W1-AACCfgDeviceUpgrade	Used to create, update, read, or delete AACCfgDeviceUpgrade in the WAM application. This component calls the W1-AACCfgDeviceUpgrade business object using the Inbound Web Service.
W1-ActivityOtherRequirement	Used to create, update, read, or delete ActivityOtherRequirement in the WAM application. This component calls the W1-ActivityOtherRequirement business object using the Inbound Web Service.
W1-AdHocActivityCore	Used to create, update, read, or delete AdHocActivityCore in the WAM application. This component calls the W1-AdHocActivityCore business object using the Inbound Web Service.
W1-AssetLocationSpecificTempl	Used to create, update, read, or delete AssetLocationSpecificTempl in the WAM application. This component calls the W1-AssetLocationSpecificTempl business object using the Inbound Web Service.
W1-AssetLocSpecTemplWorkOrder	Used to create, update, read, or delete AssetLocSpecTemplWorkOrder in the WAM application. This component calls the W1-AssetLocSpecTemplWorkOrder business object using the Inbound Web Service.
W1-AssetLocSpecTemplateAct	Used to create, update, read, or delete AssetLocSpecTemplateAct in the WAM application. This component calls the W1-AssetLocSpecTemplateAct business object using the Inbound Web Service.
W1-AssetReplicationActivity	Used to create, update, read, or delete AssetReplicationActivity in the WAM application. This component calls the W1-AssetReplicationActivity business object using the Inbound Web Service.
W1-AssetReplicationComplEvent	Used to create, update, read, or delete AssetReplicationComplEvent in the WAM application. This component calls the W1-AssetReplicationComplEvent business object using the Inbound Web Service.
W1-CreAssetAttachCmpEvt	Used to create, update, read, or delete CreAssetAttachCmpEvt in the WAM application. This component calls the W1-CreAssetAttachCmpEvt business object using the Inbound Web Service.
W1-CreAssetDocumentCmpEvt	Used to create, update, read, or deleteCreAssetDocumentCmpEvt in the WAM application. This component calls the W1-CreAssetDocumentCmpEvt business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CreAssetPayCmpEvt	Used to create, update, read, or delete CreAssetPayCmpEvt in the WAM application. This component calls the W1-CreAssetPayCmpEvt business object using the Inbound Web Service.
W1-CreNodeAttachCmpEvt	Used to create, update, read, or delete CreNodeAttachCmpEvt in the WAM application. This component calls the W1-CreNodeAttachCmpEvt business object using the Inbound Web Service.
W1-CreServiceHistoryAttCmpEvt	Used to create, update, read, or delete CreServiceHistoryAttCmpEvt in the WAM application. This component calls the W1-CreServiceHistoryAttCmpEvt business object using the Inbound Web Service.
W1-SubscriptionShiftPlanTemp	Used to create, update, read, or delete SubscriptionShiftPlanTemp in the WAM application. This component calls the W1-SubscriptionShiftPlanTemp business object using the Inbound Web Service.
W1-CommonShiftPlanTemplate	Used to create, update, read, or delete CommonShiftPlanTemplate in the WAM application. This component calls the W1-CommonShiftPlanTemplate business object using the Inbound Web Service.
W1-Craft	Used to create, update, read, or delete Craft in the WAM application. This component calls the W1-Craft business object using the Inbound Web Service.
W1-CreActivityPayCmpEvt	Used to create, update, read, or delete CreActivityPayCmpEvt in the WAM application. This component calls the W1-CreActivityPayCmpEvt business object using the Inbound Web Service.
W1-CreateActivityInboundComm	Used to create, update, read, or delete CreateActivityInboundComm in the WAM application. This component calls the W1-CreateActivityInboundComm business object using the Inbound Web Service.
W1-CreComActivityInboundComm	Used to create, update, read, or delete CreComActivityInboundComm in the WAM application. This component calls the W1-CreComActivityInboundComm business object using the Inbound Web Service.
W1-CreServiceHistoryPayCmpEvt	Used to create, update, read, or delete CreServiceHistoryPayCmpEvt in the WAM application. This component calls the W1-CreServiceHistoryPayCmpEvt business object using the Inbound Web Service.
W1-Crew	Used to create, update, read, or delete Crew in the WAM application. This component calls the W1-Crew business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CreWorkReqDocumentCmpEvt	Used to create, update, read, or delete CreWorkReqDocumentCmpEvt in the WAM application. This component calls the W1-CreWorkReqDocumentCmpEvt business object using the Inbound Web Service.
W1-CreWorkRequestPayCmpEvt	Used to create, update, read, or delete CreWorkRequestPayCmpEvt in the WAM application. This component calls the W1-CreWorkRequestPayCmpEvt business object using the Inbound Web Service.
W1-CrewShiftTemplate	Used to create, update, read, or delete CrewShiftTemplate in the WAM application. This component calls the W1-CrewShiftTemplate business object using the Inbound Web Service.
W1-CrewWithCraft	Used to create, update, read, or delete CrewWithCraft in the WAM application. This component calls the W1-CrewWithCraft business object using the Inbound Web Service.
W1-CreSvcHistCmpEvt	Used to create, update, read, or delete CreSvcHistCmpEvt in the WAM application. This component calls the W1-CreSvcHistCmpEvt business object using the Inbound Web Service.
W1-CreAssetCmpEvt	Used to create, update, read, or delete CreAssetCmpEvt in the WAM application. This component calls the W1-CreAssetCmpEvt business object using the Inbound Web Service.
W1-CreActivityCmpEvt	Used to create, update, read, or delete CreActivityCmpEvt in the WAM application. This component calls the W1-CreActivityCmpEvt business object using the Inbound Web Service.
W1- CreAssetDocumentCmpEvt	Used to create, update, read, or delete CreAssetDocumentCmpEvt in the WAM application. This component calls the W1-CreAssetDocumentCmpEvt business object using the Inbound Web Service.
W1- MeasQuckEntryActivityType	Used to create, update, read, or delete MeasQuckEntryActivityType in the WAM application. This component calls the W1-MeasQuckEntryActivityType business object using the Inbound Web Service.
W-RCMCalendarInterval	Used to create, update, read, or delete RCMCalendarInterval in the WAM application. This component calls the W1- RCMCalendarInterval business object using the Inbound Web Service.
W1-RCMRuntimeAnniversary	Used to create, update, read, or delete RCMRuntimeAnniversary in the WAM application. This component calls the W1-RCMRuntimeAnniversary business object using the Inbound Web Service.
W1-RCMRuntimeInterval	Used to create, update, read, or delete RCMRuntimeIntervalin the WAM application. This component calls the W1- RCMRuntimeInterval business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-DailySchedule	Used to create, update, read, or delete DailySchedule in the WAM application. This component calls the W1-DailySchedule business object using the Inbound Web Service.
W1-Employee	Used to create, update, read, or delete Employee in the WAM application. This component calls the W1-Employee business object using the Inbound Web Service.
W1-EquipForTemplateAct	Used to create, update, read, or delete EquipForTemplateAct in the WAM application. This component calls the W1-EquipForTemplateAct business object using the Inbound Web Service.
W1-GeneralTemplateActivity	Used to create, update, read, or delete GeneralTemplateActivity in the WAM application. This component calls the W1-GeneralTemplateActivity business object using the Inbound Web Service.
W1-GeneralTemplateWorkOrder	Used to create, update, read, or delete GeneralTemplateWorkOrder in the WAM application. This component calls the W1-GeneralTemplateWorkOrder business object using the Inbound Web Service.
W1-LaborForTemplateAct	Used to create, update, read, or delete LaborForTemplateAct in the WAM application. This component calls the W1-LaborForTemplateAct business object using the Inbound Web Service.
W1-Leave	Used to create, update, read, or delete Leave in the WAM application. This component calls the W1-Leave business object using the Inbound Web Service.
W1-LocalActivityCoreWAM	Used to create, update, read, or delete LocalActivityCoreWAM in the WAM application. This component calls the W1-LocalActivityCoreWAM business object using the Inbound Web Service.
W1-MaintenanceSchedule	Used to create, update, read, or delete MaintenanceSchedule in the WAM application. This component calls the W1-MaintenanceSchedule business object using the Inbound Web Service.
W1-ODCEquipment	Used to create, update, read, or delete ODCEquipment in the WAM application. This component calls the W1-ODCEquipment business object using the Inbound Web Service.
W1-OperationalReadingCmpEvt	Used to create, update, read, or delete OperationalReadingCmpEvt in the WAM application. This component calls the W1-OperationalReadingCmpEvt business object using the Inbound Web Service.
W1-Other	Used to create, update, read, or delete Other in the WAM application. This component calls the W1-Other business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-OtherDirectCharges	Used to create, update, read, or delete OtherDirectCharges in the WAM application. This component calls the W1-OtherDirectCharges business object using the Inbound Web Service.
W1-OtherDirectChargesOther	Used to create, update, read, or delete OtherDirectChargesOther in the WAM application. This component calls the W1-OtherDirectChargesOther business object using the Inbound Web Service.
W1-OtherForTemplateAct	Used to create, update, read, or delete OtherForTemplateAct in the WAM application. This component calls the W1-OtherForTemplateAct business object using the Inbound Web Service.
W1-Project	Used to create, update, read, or delete Project in the WAM application. This component calls the W1-Project business object using the Inbound Web Service.
W1-RCMCalendarAnniversary	Used to create, update, read, or delete RCMCalendarAnniversary in the WAM application. This component calls the W1-RCMCalendarAnniversary business object using the Inbound Web Service.
W1-RetrieveComplEvents	Used to retrieve the completion events from an activity. This component calls the W1-RETCEVT business service using the Inbound Web Service.
W1-SchedulePlan	Used to create, update, read, or delete SchedulePlan in the WAM application. This component calls the W1-SchedulePlan business object using the Inbound Web Service.
W1-TemplateActivityLaborReq	Used to create, update, read, or delete TemplateActivityLaborReq in the WAM application. This component calls the W1-TemplateActivityLaborReq business object using the Inbound Web Service.
W1-TempActMaterialReq	Used to create, update, read, or delete TemplateActMaterialReq in the WAM application. This component calls the W1-TempActMaterialReq business object using the Inbound Web Service.
W1-Timesheet	Used to create, update, read, or delete Timesheet in the WAM application. This component calls the W1-Timesheet business object using the Inbound Web Service.
W1-TimesheetDetail	Used to create, update, read, or delete TimesheetDetail in the WAM application. This component calls the W1-TimesheetDetail business object using the Inbound Web Service.
W1-TrnAssetCmpEvent	Used to create, update, read, or delete TrnAssetCmpEvent in the WAM application. This component calls the W1-TrnAssetCmpEvent business object using the Inbound Web Service.
W1- UpdAssetPayCmpEvt	Used to create, update, read, or delete UpdAssetPayCmpEvtin the WAM application. This component calls the W1- UpdAssetPayCmpEvt business object using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1- UpdNodePayCmpEvt	Used to create, update, read, or delete UpdNodePayCmpEvtthe WAM application. This component calls the W1-UpdNodePayCmpEvt business object using the Inbound Web Service.
W1-WorkOrder	Used to create, update, read, or delete WorkOrder in the WAM application. This component calls the W1-WorkOrder business object using the Inbound Web Service.
W1-WorkRequest	Used to create, update, read, or delete WorkRequest in the WAM application. This component calls the W1-WorkRequest business object using the Inbound Web Service.
W1-WorkRequestComplEvt	Used to create, update, read, or delete WorkRequestComplEvt in the WAM application. This component calls the W1-WorkRequestComplEvt business object using the Inbound Web Service.
W1-RetriveAERID	Used to read/retrieve Activity Equipment requirement ID from Act in the WAM application. This component calls the ATW1RTAERID business service using the ATW1RTAERID Inbound Web Service.
W1-RetriveALRID	Used to read/retrieve Activity Labor Requirement ID from Activity in the WAM application. This component calls the ATW1RTALRID business service using the ATW1RTALRID Inbound Web Service.
W1-RetriveAMRID	Used to read/retrieve Activity Material Requirement ID from Activity in the WAM application. This component calls the ATW1RTAMRID business service using the ATW1RTAMRID Inbound Web Service.
W1-RetriveAORID	Used to read/retrieve Activity Other Requirement ID from Activity in the WAM application. This component calls the ATW1RTAORID business service using the ATW1RTAORID Inbound Web Service.
W1-ActivityChecklist	Used to create, update, read, or delete ActivityChecklist in the WAM application. This component calls the W1-ActivityChecklist business object using ATW1ActivityChecklist Inbound Web Service.
W1-ChecklistType	Used to create, update, read, or delete W1-ChecklistType in the WAM application. This component calls the W1-ChecklistType business object using ATW1ChecklistType Inbound Web Service.
W1-WOActivityActiveOutboundMsg	Used to add/update WOActivityActive Outbound message BO in the WAM Application. This component calls the W1-WOActivityActiveOutboundMsg business service using the ATW1WOActivityActiveOutboundMsg Inbound WebService.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-WOActivityFinalOutboundMsg	Used to cancel/complete WOActivityFinalOutboundMessage BO in the WAM application. This component calls the W1-WOActivityFinalOutboundMsg business service using the ATW1WOActivityFinalOutboundMsg Inbound Web Service.
W1-WorkCategory	Used to create, update, read, or delete WorkCategory in the WAM application. This component calls the W1-WorkCategory business object using the ATW1WorkCategory Inbound Web Service.
W1-WorkCategoryBundlingAddBO	Used to create, update, read, or delete WorkCategoryBundlingAddBO in the WAM application. This component calls the W1-WorkCategoryBundlingAddBO business object using the Inbound Web Service.
W1-WorkCategoryPhysicalBO	Used to create, update, read, or deleteWorkCategoryPhysicalBO in the WAM application. This component calls the W1-WorkCategoryPhysicalBO business object using the ATW1 WorkCategoryPhysicalBO Inbound Web Service.
W1-WorkClass	Used to create, update, read, or delete WorkClass in the WAM application. This component calls the W1-WorkClass business object using the ATW1WorkClass Inbound Web Service.
W1-WorkClassBundlingAddBO	Used to create, update, read, or delete WorkClassBundlingAddBO in the WAM application. This component calls the W1-WorkClassBundlingAddBO business object using the ATW1WorkClassBundlingAddBO Inbound Web Service.
W1-WorkClassPhysicalBO	Used to create, update, read, or delete WorkClassPhysicalBO in the WAM application. This component calls the W1-WorkClassPhysicalBO business object using ATW1WorkClassPhysicalBO Inbound Web Service.
W1-ActivityGenerator	Used to create, update, read, or delete ActivityGeneratorin the WAM application. This component calls the W1- W1-ActivityGenerator business object using ATW1ActivityGenerator Inbound Web Service.
W1-ComplianceCategory	Used to create, update, read, or delete ComplianceCategory in the WAM application. This component calls the W1-ComplianceCategory business object using the ATW1ComplianceCategory Inbound Web Service.
W1-ComplianceType	Used to create, update, read, or delete ComplianceType in the WAM application. This component calls the W1-ComplianceType business object using ATW1ComplianceType Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CrAnyServiceHistoryCmplEvt	Used to create, update, read, or delete W1-CrAnyServiceHistoryCmplEvt the WAM application. This component calls the W1-CrAnyServiceHistoryCmplEvt business object using ATW1ActivityGenerator Inbound Web Service.
W1- CorrectiveComplianceType	Used to create, update, read, or delete W1-CorrectiveComplianceType the WAM application. This component calls the W1-CorrectiveComplianceType business object using ATW1 CorrectiveComplianceType Inbound Web Service.
W1- ServiceCode	Used to create, update, read, or delete ServiceCode in the WAM application. This component calls the W1- ServiceCode business object using ATW1 ServiceCode Inbound Web Service.
W1- ServiceCallCategory	Used to create, update, read, or delete W1-ServiceCallCategory the WAM application. This component calls the W1- ServiceCallCategory business object using ATW1 ServiceCallCategory Inbound Web Service.
W1- ServiceCall	Used to create, update, read, or delete W1-ServiceCall the WAM application. This component calls the W1-serviceCall business object using ATW1ServiceCall Inbound Web Service.
W1- Communication	Used to create, update, read, or delete W1-Communication the WAM application. This component calls the W1-Communication business object using ATW1Communication l Inbound Web Service.
W1-ProjectActOutboundSyncReq	Used to update or read delete W1-ProjectActOutboundSyncReq the WAM application. This component calls the W1-ProjectActOutboundSyncReq business object using ATW1 ProjectActOutboundSyncReq Inbound Web Service.
W1- ProjectActOutboundMsg	Used to update or read, W1-ProjectActOutboundMsg in the WAM application. This component calls the W1-ProjectActOutboundMsg object using ATW1 ProjectActOutboundMsg Inbound Web Service.
W1- ProjectActOutboundMsg	Used to create, update, read, or delete W1-ProjectActOutboundMsg the WAM application. This component calls the W1- ProjectActOutboundMsg business object using ATW1 ProjectActOutboundMsg Inbound Web Service.
W1-SOMActivity	Used to create, update, read, or delete W1-SOMActivity the WAM application. This component calls the W1-SOMActivity business object using ATW1SOMActivity Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1- ReplaceAssetOutbound	Used to create, update, read, or delete W1-ReplaceAssetOutbound the WAM application. This component calls the W1-ReplaceAssetOutbound business object using ATW1ReplaceAssetOutbound Inbound Web Service.
W1-ReplaceAssetLocal	Used to create, update, read, or delete W1-ReplaceAssetLocalthe WAM application. This component calls the W1-ReplaceAssetLocalbusiness object using ATW1ReplaceAssetLocal Inbound Web Service.
W1- Document	Used to create, update, read, or delete W1-Document in the WAM application. This component calls the W1- Document business object using ATW1Document Inbound Web Service.
W1- CrewWOSummary	Used to create, update, read, or delete W1-CrewWOSummary in the WAM application. This component calls the W1- CrewWOSummary business object using ATW1 CrewWOSummary Inbound Web Service.
W1- BatchLoaderRequest	Used to create, update, read, or delete W1-BatchLoaderRequest in the WAM application. This component calls the W1- BatchLoaderRequest business object using ATW1BatchLoaderRequest Inbound Web Service.
W1- ChangeRequest	Used to create, update, read, or delete W1-ChangeRequest in the WAM application. This component calls the W1- ChangeRequest business object using ATW1 ChangeRequest Inbound Web Service.
W1- RETSYNID	Used to create, update, read, or delete W1-RETSYNID in the WAM application. This component calls the W1- RETSYNID business Service using ATW1 RETSYNID Inbound Web Service.
W1-RETOUTID	Used to create, update, read, or delete W1-RETOUTID in the WAM application. This component calls the W1- RETOUTID business service using ATW1 RETOUTID Inbound Web Service.
W1-MaintenanceEvent	Used to create, update, read, or delete W1-MaintenanceEvent in the WAM application. This component calls the W1-MaintenanceEvent business object using ATW1MaintenanceEvent Inbound Web Service.
W1-GenMaterialDisposition	Used to create, update, read, or delete W1-GenMaterialDisposition in the WAM application. This component calls the W1-GenMaterialDisposition business object using ATW1GenMaterialDisposition Inbound Web Service.
W1-MaintenanceManager	Used to create, update, read, or delete W1-MaintenanceManager in the WAM application. This component calls the W1-MaintenanceManager business object using ATW1MaintenanceManager Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-SEARCHOTHRESREQBYACTIVITYID	Used to find all other resource requirements associated with a work activity. This component calls the ATW1RTAORID business service using the Inbound Web Service.
W1-SEARCHEQURESREQBYACTIVITYID	Used to find all equipment requirements associated with a work activity. This component calls the ATW1RTAERID business service using the Inbound Web Service.
W1-SEARCHLABRESREQBYACTIVITYID	Used to find all labor resource requirements associated with a work activity. This component calls the ATW1RTALRID business service using the Inbound Web Service.
W1-SEARCHMATRESREQBYACTIVITYID	Used to find all Material resource requirements associated with a work activity. This component calls the ATW1RTAMRID business service using the Inbound Web Service.
W1-TSDBYACTID	Used to retrieve all Time sheet details associated with a work activity. This component calls the ATW1TIMESHEETDETAILBYACTIVITYI business service using the Inbound Web Service.
W1-RETTSTPEM	Used to retrieve Timesheet using employee ID and time period. This component calls the W1-RETTSTPEM business service using the Inbound Web Service.
W1- RETTSDET	Used to retrieve Timesheet details. This component calls the W1-RETTSDET business service using the Inbound Web Service.
W1-RETINCOMM	Used to retrieve inbound communication details based on an activity. This component calls the W1-RETINCOMM business service using the Inbound Web Service.
W1-RETSHACT	Used to retrieve Service History Details using Activity ID. This component calls the ATW1RETSHACT business service using the Inbound Web Service.
W1-RetrieveComplEventsDtlByActId	Used to Retrieve Completion Events by Activity ID. This component calls the CM-RETCEVT business service using the Inbound Web Service.
W1-SEARCHEMPIDBYEXTID	Used to search employees by using external ID. This component calls 'W1-RETEMPLID' business service using the inbound web service.
W1-CMFieldActivityIdentifier	Used to search field activities by Activity identifier. This component calls the CM-ActivityIdentifier business service using the Inbound Web Service.
W1-CMFieldActivityWorkWindow	Used to search field activities by Activity work window. This component calls CM-ActivityWorkWindow business service using the inbound web service.
W1-CMFieldActivityLocation	Used to search field activities by Activity location. This component calls the CM-ActivityLocation business service using the Inbound Web Service.

Copyright © 2026, Oracle and/or its affiliates.

Component	Description
W1-CMFieldActivityInformation	Used to search field activities by Activity information. This component calls CM-FieldActivityInformation business service using the inbound web service.
W1-CMPermitByInfo	Used to search permit by information. This component calls the CM-PERMITQ1 business service using the Inbound Web Service.
W1-CMPermitByIdentifier	Used to search permit by identifier. This component calls CM-PERMITQ2 business service using the inbound web service.
W1-CMActivityGenByInfo	Used to search activity generator data by information. This component calls the CM-WOQ1 business service using the Inbound Web Service.
W1-CMActivityGenByIdentifier	Used to search activity generator by identifier. This component calls CM-WOQ2 business service using the inbound web service.
W1-CMActivityGenByTemplateInfo	Used to search activity generator by template information. This component calls CM-WOQ3 business service using the inbound web service.
W1-CMActivityGenBySrvSchdInfo	Used to search activity generator using Service schedule information. This component calls the CM-WOQ4 business service using the Inbound Web Service.
W1-CMActivityGenByIdentifier	Used to search activity generator by identifier. This component calls CM-WOQ2 business service using the inbound web service.
W1-CMCopyNRebalanceActAstList	Used to perform Copy and Rebalance of Work Activity Asset List. This component calls 'CM-CPNRBAST' service script using the inbound web service.
W1-CMSCHEDULEDCREWSHIFTBYACTIVITYID	Used to search crew shit using a activity ID. This component calls CM-ACTSCHLRQ business service using the inbound web service.
W1-CMWorkActivityByMaintScheduleTrigger	Used to search work activity details associated with a maintenance schedule trigger. This component calls CM-WAMSMT business service using the inbound web service.
W1-CMCommonWoActCostCalc	Used to fetch cost details for a Construction Work Activity. This component calls W1-CommonWoActCostCalc business service using the inbound web service.
W1-GetWOFrmAssetId	Used to fetch Workorder ID from Asset ID. This component calls CM-WACTQ1-WO business service using the inbound web service.

Copyright © 2026, Oracle and/or its affiliates.

4

Inbound Web Services

The Oracle Utilities Customer Program Management Cloud Service components are developed using Web services method, and these components require Inbound Web Services to be defined in the application.

This chapter includes the following:

- Pre-Requisites
- List of Inbound Web Services

Pre-Requisites

Before running the automation on Oracle Utilities Customer Program Management Cloud Service, run X1-ImportBundles-Flow1 and X1-ImportBundles-Flow2 in the Oracle Utilities Application Framework environment. This imports all the necessary Inbound Web Services required to automate flows in Oracle Utilities Customer Program Management Cloud Service environment.

List of Inbound Web Services

The Inbound Web Services provided to use with the delivered components and flows are:

- ATC1Account
- ATC1AccountBS
- ATC1AccountLetterExtract
- ATC1AcctBalLetterExtract
- ATC1ActivityInformation
- ATC1AdjLetterExtract
- ATC1Adjustment
- ATC1AutoPayLetterExtract
- ATC1Bill
- ATC1BillableCharge
- ATC1BillLetterExtract
- ATC1BillSegment
- ATC1CollectionAgencyReferral
- ATC1CollectionProcess
- ATC1CollLetterExtract
- ATC1ContractOptEvent
- ATC1ContractOption
- ATC1CtrlCenSearchByAccountId
- ATC1CtrlCenSearchByAddress

Copyright © 2026, Oracle and/or its affiliates.

- ATC1CtrlCenSearchByNameAddress
- ATC1CustConLetterExtract
- ATC1CutProcess
- ATC1DepositControl
- ATC1DeviceInformation
- ATC1EndOfLetterExtract
- ATC1FACompletionMessage
- ATC1FASyncRequestRead
- ATC1FT
- ATC1GetSyncRequestId
- ATC1GetUsageId
- ATC1IdentifierType
- ATC1LetterTemplate
- ATC1MailInfoLetterExtract
- ATC1MatchEvent
- ATC1MDM2ContractOptSyncReqRead
- ATC1MDM2ContrOptEvtSyncReqRead
- ATC1MDM2PersonSyncRequestRead
- ATC1MDM2SARelSyncRequestRead
- ATC1MDM2SASyncRequestRead
- ATC1MultiCancelRebill
- ATC1OffCycleBillGenerator
- ATC1OverdueProcess
- ATC1PayArrangeByBill
- ATC1PayArrangement
- ATC1Payment
- ATC1PaymentEvent
- ATC1PaymentEventQuickAdd
- ATC1PaymentLetterExtract
- ATC1PaymentQuickAdd
- ATC1PayPlan
- ATC1PayTndrLetterExtract
- ATC1Person
- ATC1PersonBS
- ATC1PersonLetterExtract
- ATC1PremFAGTT
- ATC1PremiseLetterExtract
- ATC1PremiseType

Copyright © 2026, Oracle and/or its affiliates.

- ATC1RateEngineConfig
- ATC1SARelationship
- ATC1ServiceAgreement
- ATC1ServiceAgreementUpdate
- ATC1ServiceRequestUpdate
- ATC1SeveranceProcess
- ATC1SevLetterExtract
- ATC1StartStop
- ATC1StartStopBS
- ATC1Statement
- ATC1SummaryLetterExtract
- ATC1TenderControl
- ATC1TenderCtrlSearchByAllUser
- ATC1UsageReqCyclicalBilling
- ATC1UsageRequestNonCyclical
- ATC1WriteOff
- ATC1WriteOffLetterExtract
- ATC1WriteOffProcess
- ATCMSyncCfgBO
- ATC1MktSATypeSARelationshipType
- ATC1SATypeSARelationshipType
- ATC1UserMiscRead
- ATC1ExternalRepoPlusSASPSync
- ATC1ExternalRepoPlusMailAddSync
- ATD1Business
- ATD1ContactType
- ATD1CreateFAIMDRead
- ATD1CutServiceForNonPayment
- ATD1DeviceCommissionRead
- ATD1DeviceConfiguration
- ATD1DeviceConfigurationType
- ATD1DisableService
- ATD1DisableServiceType
- ATD1DvcEventCategoryLookup
- ATD1EnableService
- ATD1EnableServiceType
- ATD1EstimationIMDInterval
- ATD1EstimationIMDScalar

Copyright © 2026, Oracle and/or its affiliates.

- ATD1ExternalApplication
- ATD1FieldActivity
- ATD1FieldActivityType
- ATD1GetUsageFromExtID
- ATD1HeadEndSystem
- ATD1HowToCreateActivityOBComm
- ATD1HowToCreateMCInformation
- ATD1HowToProcessDeviceInfo
- ATD1IMDSeeder
- ATD1InitialLoadIMDInterval
- ATD1InitialLoadIMDScalar
- ATD1InitialLoadIMDSubtrInterval
- ATD1InstallDeviceRead
- ATD1InstallEventSyncRequestRead
- ATD1IntervalChannel
- ATD1Item
- ATD1ItemInstallEvent
- ATD1ItemType
- ATD1ManualIMDInterval
- ATD1ManualIMDScalar
- ATD1ManualIMDSubtrInterval
- ATD1ManualMeter
- ATD1ManualMeterInstallEvent
- ATD1Manufacturer
- ATD1MarketParticipant
- ATD1OnDemandReadInterval
- ATD1OnDemandReadIntervalType
- ATD1OnDemandReadScalar
- ATD1OnDemandReadScalarType
- ATD1OngoingSyncRequestContactRead
- ATD1OngoingSyncRequestDeviceRead
- ATD1Person
- ATD1Register
- ATD1RegisterType
- ATD1RequestToDoRead
- ATD1SeederSyncMasterConfig
- ATD1ServicePoint
- ATD1ServicePointCharacteristics

Copyright © 2026, Oracle and/or its affiliates.

- ATD1ServicePointType
- ATD1ServiceType
- ATD1SGGPayloadProcessing
- ATD1SmartMeter
- ATD1SmartMeterInstallEvent
- ATD1SmartMeterType
- ATD1StdEventNameLookup
- ATD1UnitOfMeasure
- ATD1UpdateDeviceRead
- ATD1UpdateSPRead
- ATD1VEEGroup
- ATD2DynamicOption
- ATD2DynamicOptionEvent
- ATD2OngoingSyncRequestDynOptEvtRead
- ATD2OngoingSyncRequestDynOptRead
- ATD2OngoingSyncRequestUSRead
- ATD2OngoingSyncReqUSMktPartRead
- ATD2UsageSubscription
- ATD2UsageTransaction
- ATD2UsgSubsMarketParticipant
- ATD8DeviceEventMappingLookup
- ATD8HeadendUOMLookup
- ATD8ReadOnDemandReadResultType
- ATD8ReadResultType
- ATD8ReadScalarType
- ATD8StatusChangedType
- ATD8VersionMasterConfig
- ATW1AACCfgDeviceUpgrade
- ATW1AACfgDeviceUpgrade
- ATW1ACACCfgDeviceUpgrade
- ATW1ACACfgDeviceUpgrade
- ATW1ActivityCompletionEventType
- ATW1ActivityComplInboundComm
- ATW1ActivityNotes
- ATW1AdHocActCoreNoLocation
- ATW1AdHocActivityCore
- ATW1AssetCompCfgRpt
- ATW1AssetCompCfgWO

Copyright © 2026, Oracle and/or its affiliates.

- ATW1AssetCompConfig
- ATW1AssetCompletionEventType
- ATW1AssetCompToAssetCfgWO
- ATW1AssetCompToAssetCompCfgRpt
- ATW1AssetCompToAssetCompCfgWO
- ATW1AssetCompToAssetCompConfig
- ATW1AssetCriteriaActGenerator
- ATW1AssetDposCmpEvtType
- ATW1AssetListActGenerator
- ATW1AssetLocation
- ATW1AssetLocationType
- ATW1AssetReplicationActivity
- ATW1AssetReplicationComplEvent
- ATW1AssetToAssetCfgWO
- ATW1AssetToAssetCompCfgRpt
- ATW1AssetToAssetCompCfgWO
- ATW1AssetToAssetConfig
- ATW1AssetType
- ATW1BasicActivityType
- ATW1BasicTest
- ATW1BasicWorkOrder
- ATW1Business
- ATW1CompnAssetListActGenerator
- ATW1CompnCriteriaActGenerator
- ATW1ComponentType
- ATW1ConfigType
- ATW1ContactType
- ATW1CrAnyServiceHistoryCmplEvt
- ATW1CreActivityPayCmpEvt
- ATW1CreAssetAttachCmpEvt
- ATW1CreAssetCmpEvt
- ATW1CreAssetPayCmpEvt
- ATW1CreateMobileWOInboundComm
- ATW1CreNodeAttachCmpEvt
- ATW1CreServiceHistoryAttCmpEvt
- ATW1CreServiceHistoryPayCmpEvt
- ATW1CreSvcHistCmpEvt
- ATW1DataAreaCmpEvtType

Copyright © 2026, Oracle and/or its affiliates.

- ATW1FollowUpSkippedAssetsCmpEvt
- ATW1GeneralCommunicationType
- ATW1GeneralCompletionEventType
- ATW1LocalActivityCore
- ATW1Manufacturer
- ATW1MDMAssetSyncRequestRead
- ATW1MobileUpdWorkedAssetCmpEvt
- ATW1NodeCriteriaActGenerator
- ATW1OngoingSyncRequestAssetNodeRead
- ATW1Organization
- ATW1OrganizationType
- ATW1OutboundActivityCore
- ATW1OutboundActivityType
- ATW1Person
- ATW1ReplaceAssetLocal
- ATW1ReplaceAssetOutbound
- ATW1ReplicationComplEventType
- ATW1ScheduledActivityType
- ATW1ServiceHistory
- ATW1ServiceHistoryType
- ATW1ServiceHistTypeCmpEvtType
- ATW1SingleAssetCfgRpt
- ATW1SingleAssetCfgWO
- ATW1SingleAssetConfig
- ATW1SOMActivity
- ATW1SOMActiviType
- ATW1StorageLocation
- ATW1StorageLocationType
- ATW1SvcHistFromActvCmplEvtType
- ATW1TrnAssetCmpEvent
- ATW1UpdAssetPayCmpEvt
- ATW1UpdNodePayCmpEvt
- ATW1WorkOrderNotes
- ATW2AACCfgFirmwareUpgrade
- ATW2AACfgFirmwareUpgrade
- ATW2ACACCfgFirmwareUpgrade
- ATW2ACACfgFirmwareUpgrade
- ATW2ACCfgFirmwareUpgrade

Copyright © 2026, Oracle and/or its affiliates.

- ATW2ACfgFirmwareUpgrade
- ATW2CommunicationComponent
- ATW2CommunicationComponentSpec
- ATW2CommunicationRelay
- ATW2CommunicationRelaySpec
- ATW2FirmwareCommandLocal
- ATW2FirmwareCommandOutbound
- ATW2FirmwareSpecification
- ATW2FirmwareVersion
- ATW2ManualMeter
- ATW2ManualMeterSpecification
- ATW2ServicePoint
- ATW2SmartMeter
- ATW2SmartMeterSpecification
- ATW2SmartTest
- ATW2Vehicle
- ATX1AssetLocationType
- ATX1C2MMasterConfiguration
- ATX1C2MSATypeMapping
- ATX1CCBMDM-MDMCCB-Lookup
- ATX1DServicePointType
- ATX1GetSyncRequestInId
- ATX1ODMMDM-MDMODM-Lookup
- ATX1RetrieveAlerts
- ATX1RetrieveGlobalContexts
- ATX1ServicePoint
- ATX1ServicePointType
- ATX1ServiceType
- ATX1UnitOfMeasure
- ATC1AutoPayTask
- ATC1AutoPayTaskType
- ATC1OneTimePaymentTask
- ATC1OneTimePaymentTaskType
- ACT1RecommendBudget
- ATC1PayEventPhysicalBO
- D1-DataSourceMeasurements
- D1-DataSourceMeasurementDirect

Copyright © 2026, Oracle and/or its affiliates.

5

Identifying Fields For a Web Service Request

The requisite fields need to be filled up with data in order to map the value on a given schema.

Example: When a person is added online, only the field description is shown, but the exact field mapping is hidden from the user.

Following are the methods you can use to identify fields for a web service request and add data in those fields:

- Debug Mode in the Application
- IE Development Tool Bar
- SOAP UI

Debug Mode in the Application


The debug mode enables users to check the field mapping on a given maintenance page. This is actually the easiest among the different possible ways; however some clients may have system restriction (such as access restriction) on using debug mode.

To enter test data in the requisite fields using the debug method:

1. Login to the application in the ‘debug’ mode.
2. Before clicking the Debug mode switch ensure to navigate first to the target page. Example: Person maintenance page

Copyright © 2026, Oracle and/or its affiliates.


Figure 5-1 Debug Switch

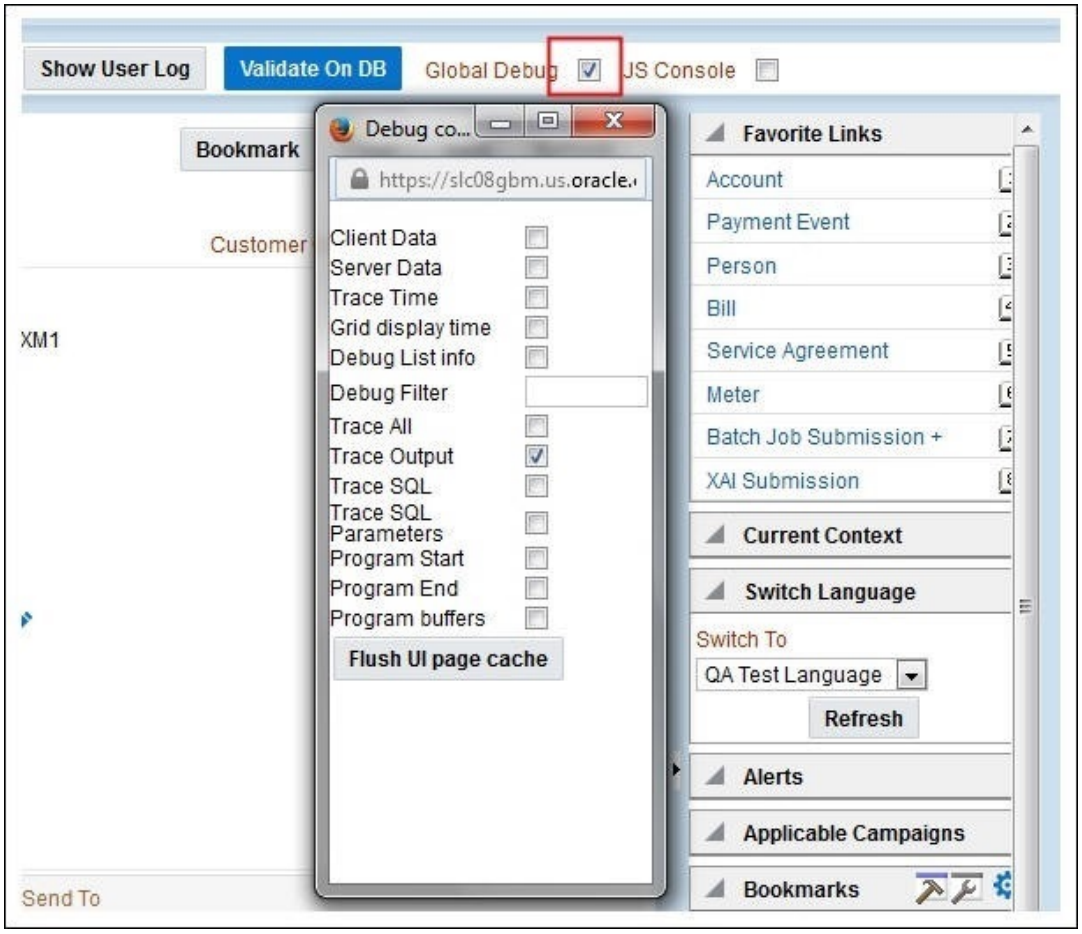

3. Perform the required action and click **Save**.
Example: The figure below shows adding a person (person name, person phone, person contacts, Person IDs, etc) .

Copyright © 2026, Oracle and/or its affiliates.


Figure 5-2 Add a person

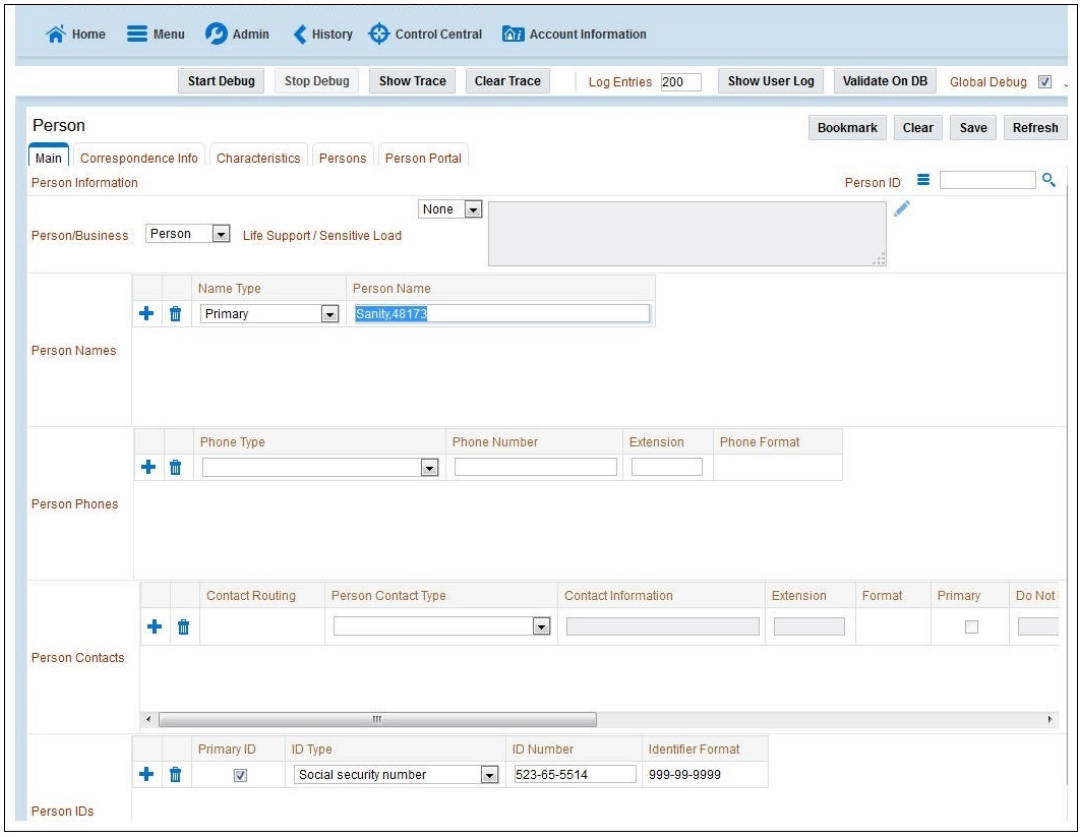

The schema window showing the populated values is displayed.

Copyright © 2026, Oracle and/or its affiliates.


Figure 5-3 Schema window

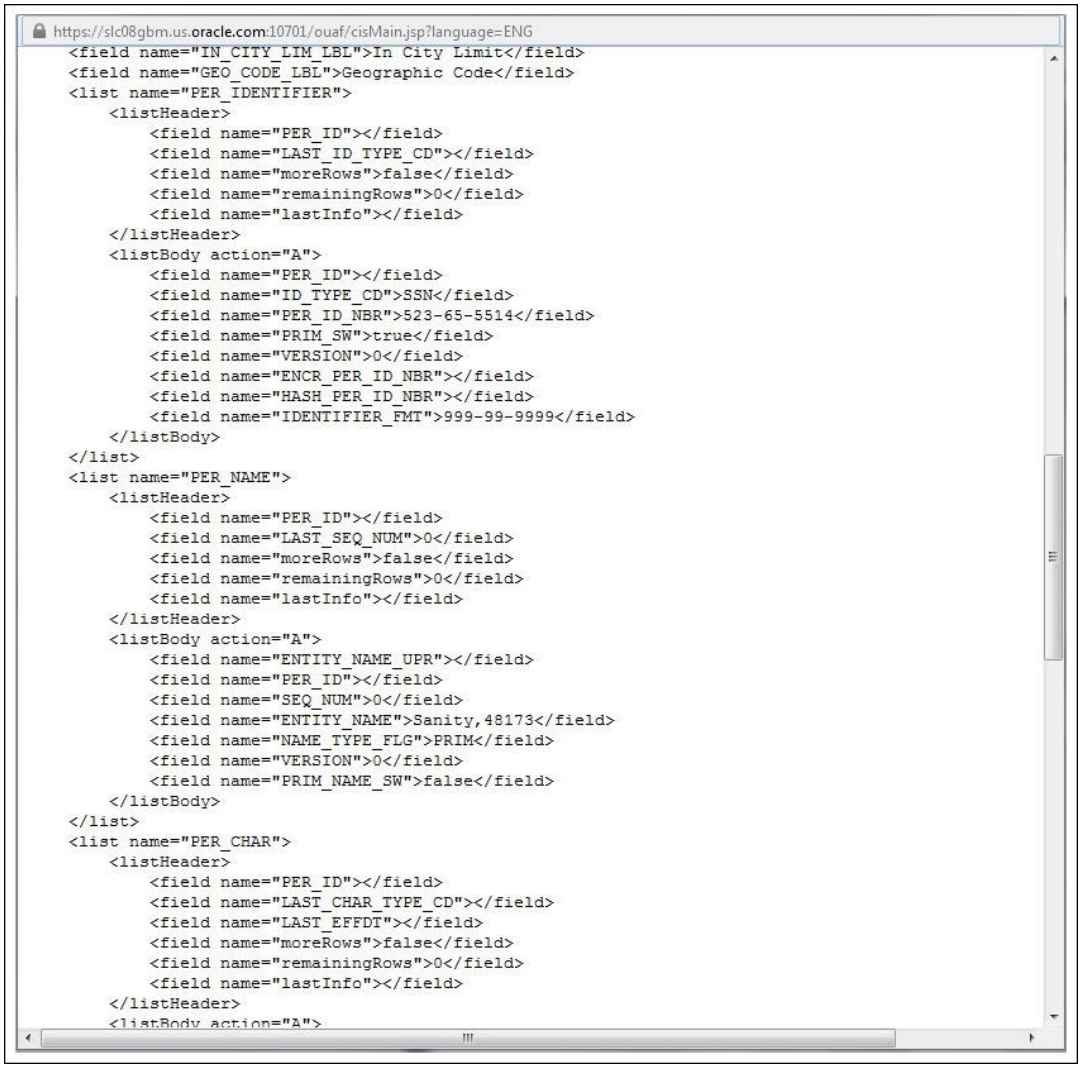

4. Navigate to the Business Object or Business Service lookup window for the requisite field. Example: In the figure below, ENTITY_NAME is named as entityName.


Copyright © 2026, Oracle and/or its affiliates.

Figure 5-4 Business Object Lookup window

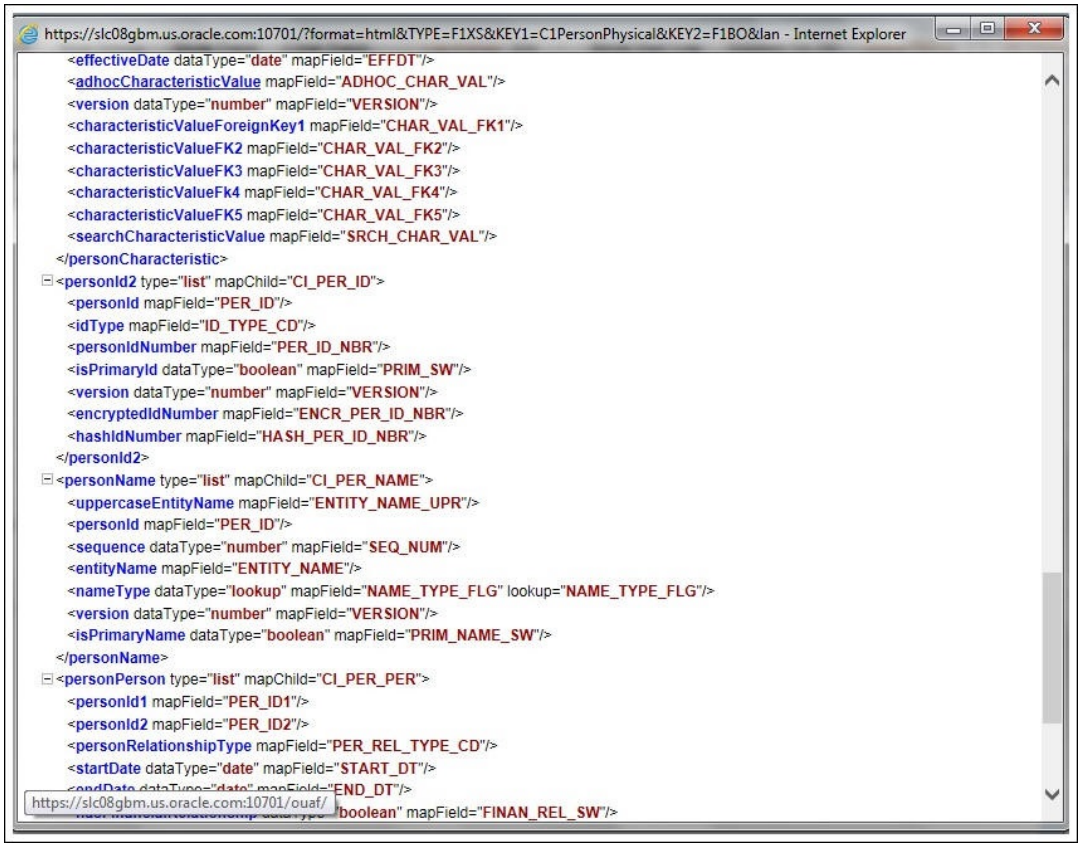

5. In the flow, search for the requisite field and enter the component test data.

Figure 5-5 Component Test Data

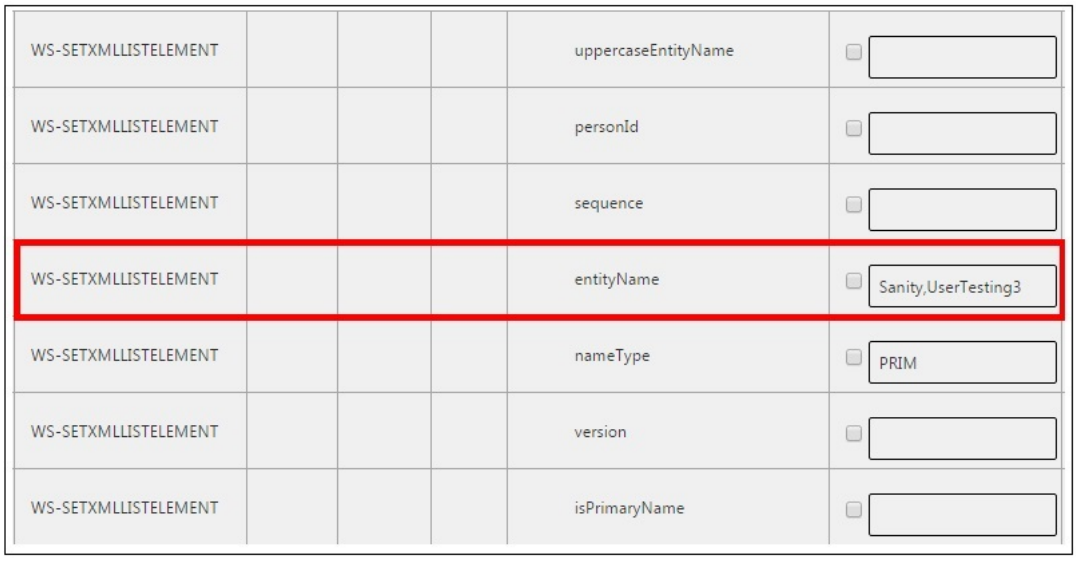

6. Click **Save** to save the test data.

Copyright © 2026, Oracle and/or its affiliates.


IE Development Tool Bar

The IE Development tool bar, available in IE11, enables users to inspect the page and its field mapping. It is on a 1:1 basis, meaning one inspect = one field.

To enter test data in the requisite fields using the IE Development tool bar:


1. Login to Oracle Utilities Rate Cloud Service using Internet Explorer 11.
2. Navigate to the page where the requisite field needs to be updated with data.
   Example: The figure below shows the **Account** page where the **Characteristic Value** field on the **Characteristics** tab needs to be updated.

Figure 5-6 Accounts page

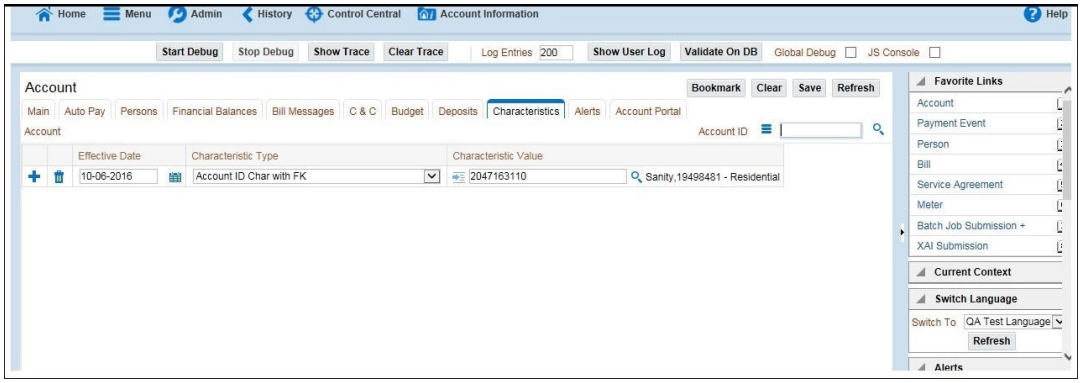

3. Press **F12**. The browser displays the F12 developer tools that help in building and debugging web pages.


Figure 5-7 F12 Developer tools

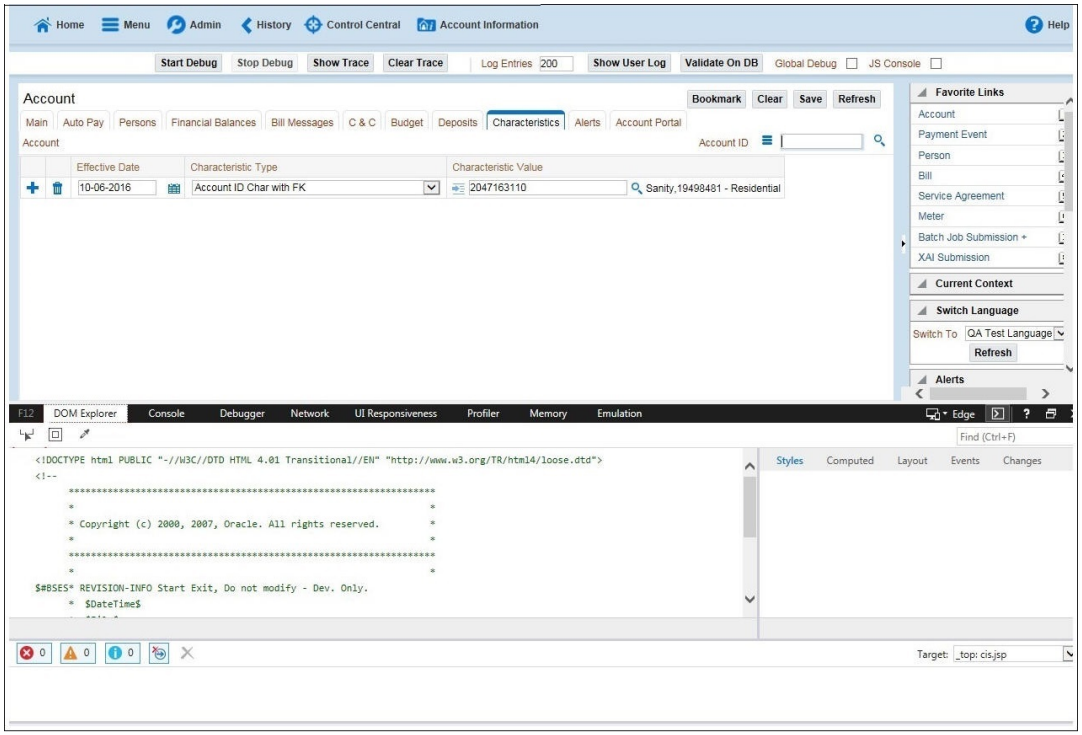

Copyright © 2026, Oracle and/or its affiliates.

4. On the F12 tools menu, click the **DOM Explorer** tab, and then click the **Select element** icon.


Figure 5-8 DOM Explorer

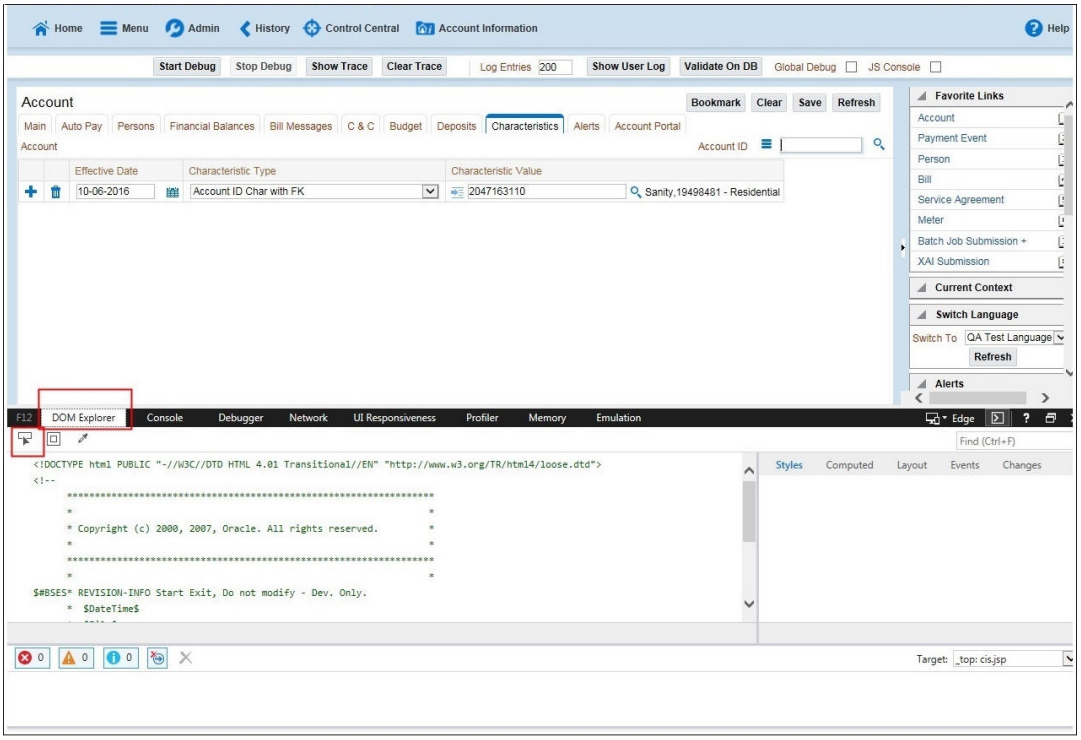

5. On the application page, click the field for which you need to enter the data. The DOM Explorer shows the HTML for the selected field.
Example: Click the **Characteristic Value** field on the **Account** page. The DOM Explorer shows the **ID** of that field.


Copyright © 2026, Oracle and/or its affiliates.

Figure 5-9 DOM Explorer

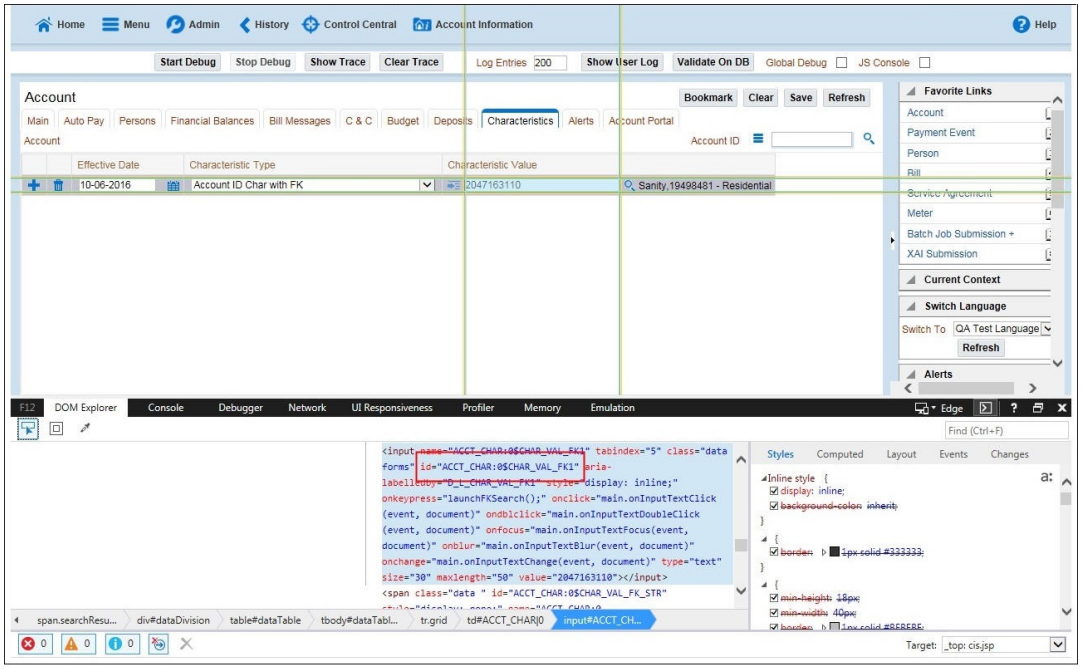

6. On the object lookup window, search the requisite field.
Example: Search for CHAR_VAL_FK1.


Figure 5-10 Object Lookup window

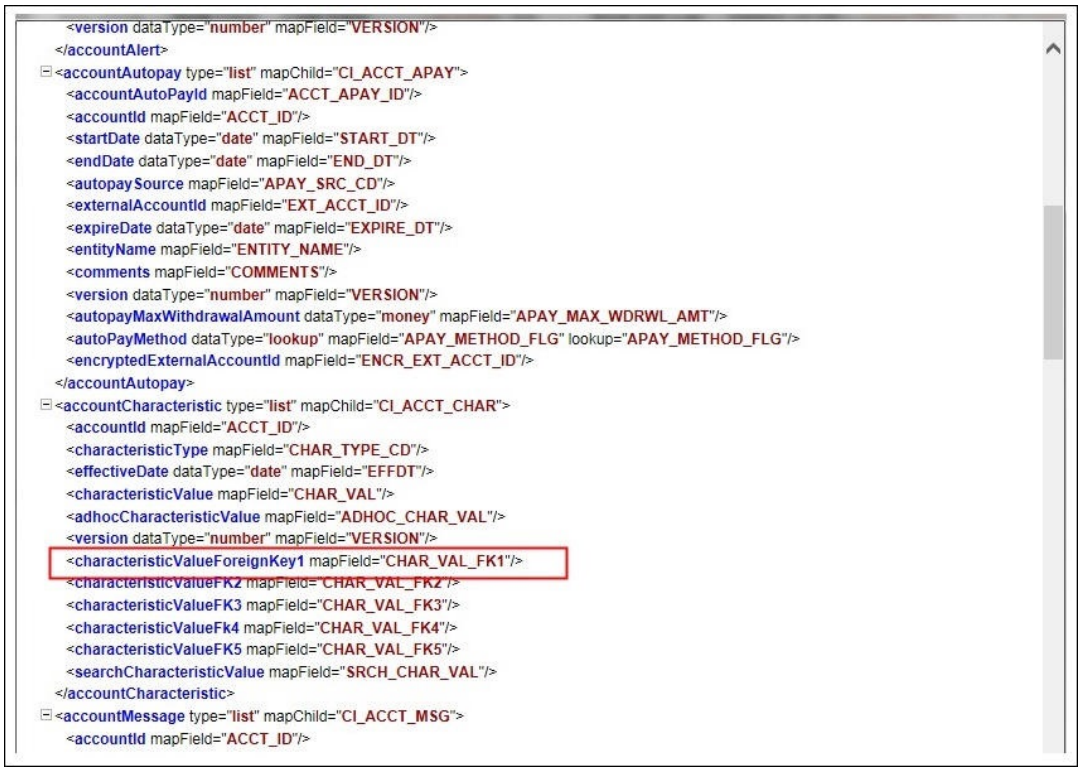

7. In the flow, add the necessary data into the field.

Copyright © 2026, Oracle and/or its affiliates.

Figure 5-11 Flow window

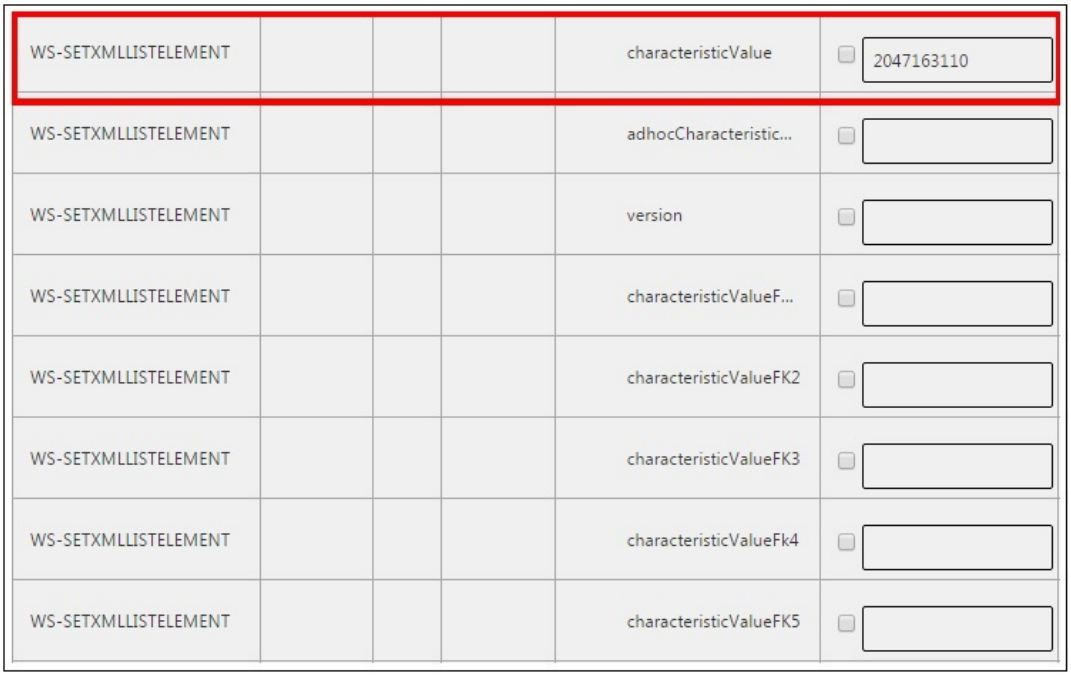

8. Click **Save** to save the data.

SOAP UI


This method is an alternative to the other methods mentioned above if the user is familiar with SOAP UI.

To identify the requisite fields using SOAP UI:

1. Login to the Oracle Utilities Rate Cloud Service application.
2. Navigate to the page where the test data has to added. Add the data in the respective fields.
   Example: The figure below shows the **Case** page where **Characteristics Type** and **Characteristic Value** are added in the **Characteristics** section.

Copyright © 2026, Oracle and/or its affiliates.


Figure 5-12 Case page

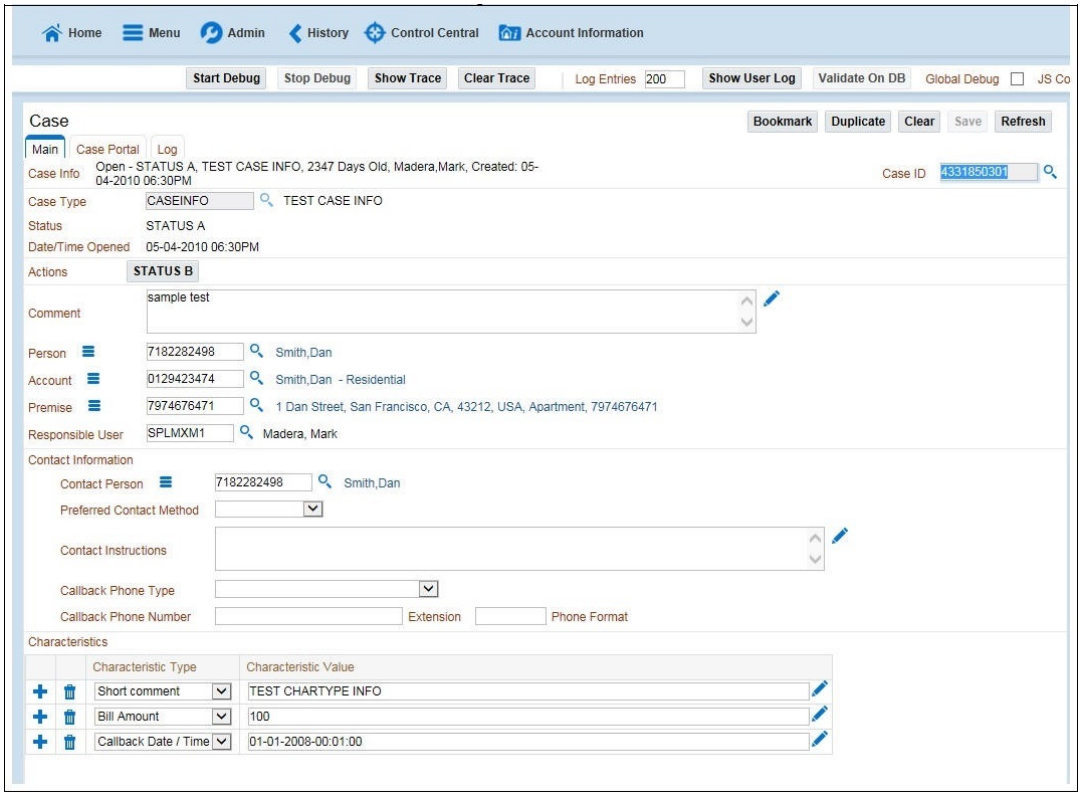

3. On the SOAP UI, perform a Read using the data that has been added on the **Case** page (in step 2). The result is displayed in the right pane.

Copyright © 2026, Oracle and/or its affiliates.

Figure 5-13 Performing a read

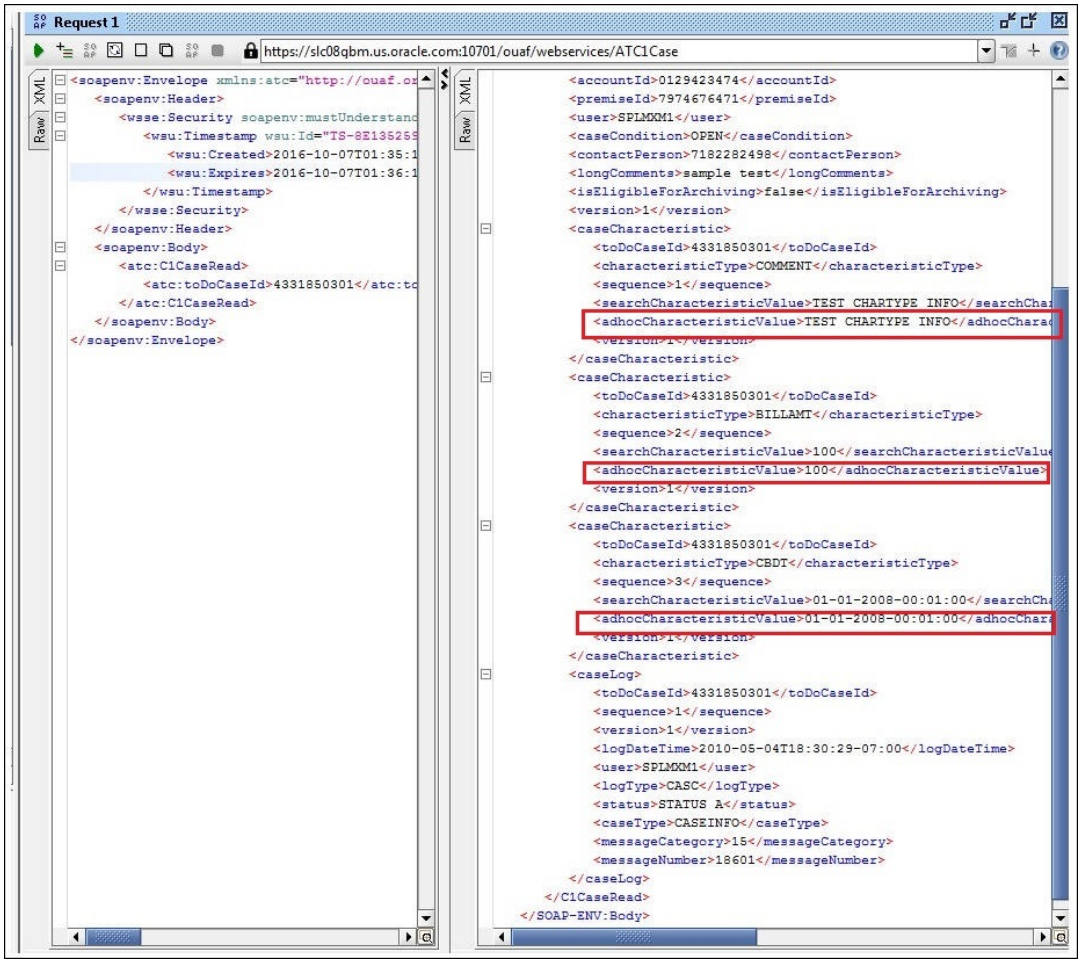


4. Copy the values and paste them in the respective fields on the flow. Example: COMMENT and TEST CHARTYPE INFO are the values for **characteristicType** and **adhocCharacteristicValue** fields.

> **Note**
>
> Not all fields populated on the SOAP response needs to be populated on the flow. (Example: version, info, other type of description, etc).

Copyright © 2026, Oracle and/or its affiliates.

Figure 5-14 Copy values

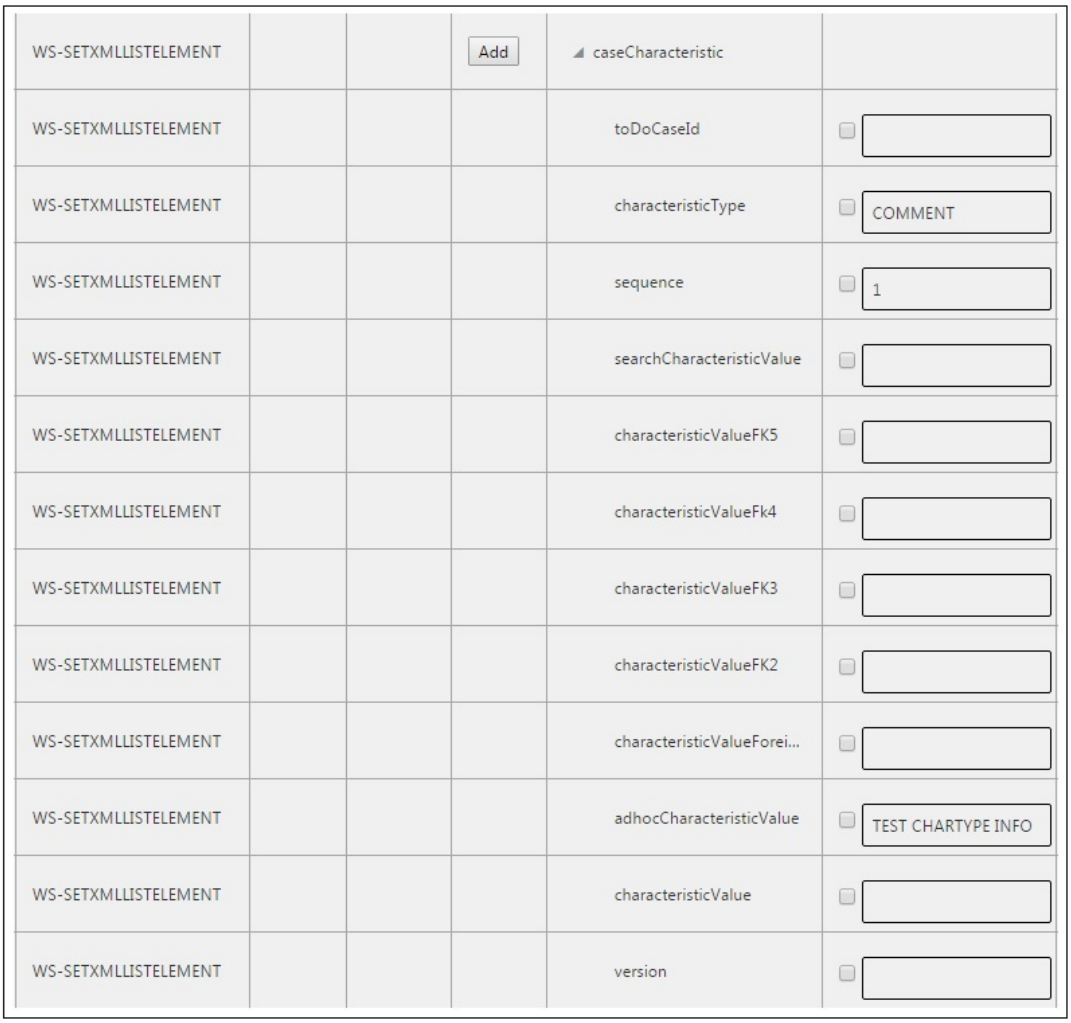

5. Click **Save** to save the data.

Copyright © 2026, Oracle and/or its affiliates.