

Java Platform, Standard Edition

Core Libraries



Release 17
F40864-06
October 2025



Copyright © 2017, 2025, Oracle and/or its affiliates.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software, software documentation, data (as defined in the Federal Acquisition Regulation), or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs) and Oracle computer documentation or other Oracle data delivered to or accessed by U.S. Government end users are "commercial computer software," "commercial computer software documentation," or "limited rights data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, reproduction, duplication, release, display, disclosure, modification, preparation of derivative works, and/or adaptation of i) Oracle programs (including any operating system, integrated software, any programs embedded, installed, or activated on delivered hardware, and modifications of such programs), ii) Oracle computer documentation and/or iii) other Oracle data, is subject to the rights and limitations specified in the license contained in the applicable contract. The terms governing the U.S. Government's use of Oracle cloud services are defined by the applicable contract for such services. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle®, Java, MySQL, and NetSuite are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Inside are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Epyc, and the AMD logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information about content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services unless otherwise set forth in an applicable agreement between you and Oracle. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services, except as set forth in an applicable agreement between you and Oracle.

Contents

Preface

Audience	i
Related Documents	i
Conventions	i

1 Java Core Libraries

2 Serialization Filtering

Addressing Deserialization Vulnerabilities	1
Java Serialization Filters	2
Filter Factories	3
Allow-Lists and Reject-Lists	3
Creating Pattern-Based Filters	4
Creating Custom Filters	6
Reading a Stream of Serialized Objects	6
Setting a Custom Filter for an Individual Stream	7
Setting a JVM-Wide Custom Filter	7
Setting a Custom Filter Using a Pattern	7
Setting a Custom Filter as a Class	8
Setting a Custom Filter as a Method	9
Creating a Filter with ObjectInputFilter Methods	9
Setting a Filter Factory	10
Setting a Filter Factory with setSerialFilterFactory	11
Specifying a Filter Factory in a System or Security Property	13
Built-in Filters	13
Logging Filter Actions	15

3 Enhanced Deprecation

Deprecation in the JDK	1
How to Deprecate APIs	1
Notifications and Warnings	3

4 XML Catalog API

Purpose of XML Catalog API	1
XML Catalog API Interfaces	2
Using the XML Catalog API	3
System Reference	3
Public Reference	5
URI Reference	5
Java XML Processors Support	6
Enable Catalog Support	7
Use Catalog with XML Processors	8
Calling Order for Resolvers	12
Detecting Errors	12

5 Creating Unmodifiable Lists, Sets, and Maps

Use Cases	1
Syntax	2
Unmodifiable List Static Factory Methods	2
Unmodifiable Set Static Factory Methods	2
Unmodifiable Map Static Factory Methods	3
Creating Unmodifiable Copies of Collections	4
Creating Unmodifiable Collections from Streams	4
Randomized Iteration Order	5
About Unmodifiable Collections	6
Space Efficiency	7
Thread Safety	8

6 Process API

Process API Classes and Interfaces	1
ProcessBuilder Class	2
Process Class	2
ProcessHandle Interface	3
ProcessHandle.Info Interface	4
Creating a Process	4
Getting Information About a Process	5
Redirecting Output from a Process	6
Filtering Processes with Streams	6
Handling Processes When They Terminate with the onExit Method	7

7 Preferences API

Comparing the Preferences API to Other Mechanisms	1
Usage Notes	2
Obtain Preferences Objects for an Enclosing Class	2
Obtain Preferences Objects for a Static Method	3
Atomic Updates	3
Determine Backing Store Status	4
Design FAQ	4

8 Java Logging Overview

Java Logging Examples	7
Appendix A: DTD for XMLFormatter Output	9

9 Java NIO

Grep NIO Example	4
Checksum NIO Example	5
Time Query NIO Example	6
Time Server NIO Example	8
Non-Blocking Time Server NIO Example	9
Internet Protocol and UNIX Domain Sockets NIO Example	10
Chmod File NIO Example	17
Copy File NIO Example	22
Disk Usage File NIO Example	26
User-Defined File Attributes File NIO Example	26

10 Java Networking

Networking System Properties	1
HTTP Client Properties	1
HTTP Server Properties	4
IPv4 and IPv6 Protocol Properties	6
HTTP Proxy Properties	7
HTTPS Proxy Properties	8
FTP Proxy Properties	8
SOCKS Proxy Properties	9
Acquiring the SOCKS User Name and Password	9
Other Proxy-Related Properties	10

UNIX Domain Sockets Properties	11
Other HTTP URL Stream Protocol Handler Properties	12
System Properties That Modify the Behavior of HTTP Digest Authentication Mechanism	14
Address Cache Properties	15
Enhanced Exception Messages	15

11 Pseudorandom Number Generators

Characteristics of PRNGs	1
Generating Pseudorandom Numbers with RandomGenerator Interface	2
Generating Pseudorandom Numbers in Multithreaded Applications	3
Dynamically Creating New Generators	3
Creating Stream of Generators	3
Choosing a PRNG Algorithm	4

Preface

This guide provides information about the Java core libraries.

Audience

This document is for Java developers who develop applications that require functionality such as threading, process control, I/O, monitoring and management of the Java Virtual Machine (JVM), serialization, concurrency, and other functionality close to the JVM.

Related Documents

See [JDK 17 Documentation](#).

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

1

Java Core Libraries

The core libraries consist of classes which are used by many portions of the JDK. They include functionality which is close to the VM and is not explicitly included in other areas, such as security. Here you will find current information that will help you use some of the core libraries.

Topics in this Guide

- [Serialization Filtering](#)
- [Enhanced Deprecation](#)
- [XML Catalog API](#)
- [Creating Unmodifiable Lists, Sets, and Maps](#)
- [Process API](#)
- [Preferences API](#)
- [Java Logging Overview](#)
- [Java NIO](#)
- [Java Networking](#)
- [Pseudorandom Number Generators](#)

Other Core Libraries Guides

- Internationalization Overview in *Java Platform, Standard Edition Internationalization Guide*

Security Related Topics

- [Serialization Filtering](#)
- RMI:
 - RMI Security Recommendations in *Java Platform, Standard Edition Java Remote Method Invocation User's Guide*
 - [Using Custom Socket Factories with Java RMI](#) in the Java Tutorials
- JAXP:
 - [JAXP Processing Limits](#) in the Java Tutorials
 - [External Access Restriction Properties](#) in the Java Tutorials

Serialization Filtering

You can use the Java serialization filtering mechanism to help prevent deserialization vulnerabilities. You can define pattern-based filters or you can create custom filters.

Topics:

- [Addressing Deserialization Vulnerabilities](#)
- [Java Serialization Filters](#)
- [Filter Factories](#)
- [Allow-Lists and Reject-Lists](#)
- [Creating Pattern-Based Filters](#)
- [Creating Custom Filters](#)
- [Setting a Filter Factory](#)
- [Built-in Filters](#)
- [Logging Filter Actions](#)

Addressing Deserialization Vulnerabilities

An application that accepts untrusted data and deserializes it is vulnerable to attacks. You can create filters to screen incoming streams of serialized objects before they are deserialized.

Inherent Dangers of Deserialization

Deserializing untrusted data, especially from an unknown, untrusted, or unauthenticated client, is an inherently dangerous activity because the content of the incoming data stream determines the objects that are created, the values of their fields, and the references between them. By careful construction of the stream, an adversary can run code in arbitrary classes with malicious intent.

For example, if object construction has side effects that change state or invoke other actions, then those actions can compromise the integrity of application objects, library objects, and even the Java runtime. "Gadget classes," which can perform arbitrary reflective actions such as create classes and invoke methods on them, can be serialized maliciously to cause a denial of service or remote code execution.

The key to disabling deserialization attacks is to prevent instances of arbitrary classes from being serialized, thereby preventing the direct or indirect execution of their methods. You can do this through serialization filters.

Java Serialization and Deserialization Overview

An object is serialized when its state is converted to a byte stream. That stream can be sent to a file, to a database, or over a network. A Java object is serializable if its class or any of its superclasses implements either the `java.io.Serializable` interface or the `java.io.Externalizable` subinterface. In the JDK, serialization is used in many areas,

including Remote Method Invocation (RMI), custom RMI for interprocess communication (IPC) protocols (such as the Spring HTTP invoker), and Java Management Extensions (JMX).

An object is deserialized when its serialized form is converted to a copy of the object. It is important to ensure the security of this conversion. Deserialization is code execution because the `readObject` method of the class that is being deserialized can contain custom code.

Serialization Filters

A serialization filter enables you to specify which classes are acceptable to an application and which should be rejected. Filters also enable you to control the object graph size and complexity during deserialization so that the object graph doesn't exceed reasonable limits. You can configure filters as properties or implement them programmatically.

Note

A serialization filter is not enabled or configured by default. Serialization filtering doesn't occur unless you have specified the filter in a system property or a Security Property or set it with the `ObjectInputFilter` class.

Besides creating filters, you can take the following actions to help prevent deserialization vulnerabilities:

- Do not deserialize untrusted data.
- Use SSL to encrypt and authenticate the connections between applications.
- Validate field values before assignment, for example, checking object invariants by using the `readObject` method.

Note

Built-in filters are provided for RMI. However, you should use these built-in filters as starting points only. Configure reject-lists and/or extend the allow-list to add additional protection for your application that uses RMI. See [Built-in Filters](#).

For more information about these and other strategies, see "Serialization and Deserialization" in [Secure Coding Guidelines for Java SE](#).

Java Serialization Filters

The Java serialization filtering mechanism screens incoming streams of serialized objects to help improve security and robustness. Filters can validate incoming instances of classes before they are deserialized.

As stated in [JEP 290](#) and [JEP 415](#), the goals of the Java serialization filtering mechanism are to:

- Provide a way to narrow the classes that can be deserialized down to a context-appropriate set of classes.
- Provide metrics to the filter for graph size and complexity during deserialization to validate normal graph behaviors.
- Allow RMI-exported objects to validate the classes expected in invocations.

There are two kinds of filters:

- **JVM-wide filter:** Is applied to every deserialization in the JVM. However, whether and how a JVM-wide filter validates classes in a particular deserialization depends on how it's combined with other filters.
- **Stream-specific filter:** Validates classes from one specific `ObjectInputStream`.

You can implement a serialization filter in the following ways:

- **Specify a JVM-wide, pattern-based filter with the `jdk.serialFilter` property:** A pattern-based filter consists of a sequence of patterns that can accept or reject the name of specific classes, packages, or modules. It can place limits on array sizes, graph depth, total references, and stream size. A typical use case is to add classes that have been identified as potentially compromising the Java runtime to a reject-list. If you specify a pattern-based filter with the `jdk.serialFilter` property, then you don't have to modify your application.
- **Implement a custom or pattern-based stream-specific filter with the `ObjectInputFilter` API:** You can implement a filter with the `ObjectInputFilter` API, which you then set on an `ObjectInputStream`. You can create a pattern-based filter with the `ObjectInputFilter` API by calling the `Config.createFilter(String)` method.

 **Note**

A serialization filter is not enabled or configured by default. Serialization filtering doesn't occur unless you have specified the filter in a system property or a Security Property or set it with the `ObjectInputFilter` class.

For every new object in the stream, the filter mechanism applies only one filter to it. However, this filter might be a combination of filters.

In most cases, a stream-specific filter should check if a JVM-wide filter is set, especially if you haven't specified a filter factory. If a JVM-wide filter does exist, then the stream-specific filter should invoke it and use the JVM-wide filter's result unless the status is `UNDECIDED`.

Filter Factories

A filter factory selects, chooses, or combines filters into a single filter to be used for a stream. When you specify one, a deserialization operation uses it when it encounters a class for the first time to determine whether to allow it. (Subsequent instances of the same class aren't filtered.) It's implemented as a `BinaryOperator<ObjectInputFilter>` and specified with the `ObjectInputFilter.Config.setSerialFilterFactory` method or in a system or Security property; see [Setting a Filter Factory](#). Whenever an `ObjectInputStream` is created, the filter factory selects an `ObjectInputFilter`. However, you can have a different filter created based on the characteristics of the stream and the filter that the filter factory previously created.

Allow-Lists and Reject-Lists

Allow-lists and reject-lists can be implemented using pattern-based filters or custom filters. These lists allow you to take proactive and defensive approaches to protect your applications.

The proactive approach uses allow-lists to allow only class names that are recognized and trusted and to reject all others. You can implement allow-lists in your code when you develop

your application, or later by defining pattern-based filters. If your application only deals with a small set of classes then this approach can work very well. You can implement allow-lists by specifying the names of classes, packages, or modules that are allowed.

The defensive approach uses reject-lists to reject instances of classes that are not trusted. Usually, reject-lists are implemented after an attack that reveals that a class is a problem. A class name can be added to a reject-list, without a code change, by adding it to a pattern-based filter that's specified in the `jdk.serialFilter` property.

Creating Pattern-Based Filters

Pattern-based filters are filters that you define without changing your application code. You add JVM-wide filters in properties files or application-specific filters on the `java` command line.

A pattern-based filter is a sequence of patterns. Each pattern is matched against the name of a class in the stream or a resource limit. Class-based and resource limit patterns can be combined in one filter string, with each pattern separated by a semicolon (;).

Pattern-based Filter Syntax

When you create a filter that is composed of patterns, use the following guidelines:

- Separate patterns by semicolons. For example:

```
pattern1.*;pattern2.*
```

- White space is significant and is considered part of the pattern.
- Put the limits first in the string. They are evaluated first regardless of where they are in the string, so putting them first reinforces the ordering. Otherwise, patterns are evaluated from left to right.
- A class name that matches a pattern that is preceded by ! is rejected. A class name that matches a pattern without ! is allowed. The following filter rejects `pattern1.MyClass` but allows `pattern2.MyClass`:

```
!pattern1.*;pattern2.*
```

- Use the wildcard symbol (*) to represent unspecified class names in a pattern as shown in the following examples:
 - To match every class name, use *
 - To match every class name in `mypackage`, use `mypackage.*`
 - To match every class name in `mypackage` and its subpackages, use `mypackage.**`
 - To match every class name that starts with `text`, use `text*`

If a class name doesn't match any filter, then it is allowed. If you want to allow only certain class names, then your filter must reject everything that doesn't match. To reject all class names other than those specified, include `!*` as the last pattern in a class filter.

For a complete description of the syntax for the patterns, see [JEP 290](#).

Pattern-Based Filter Limitations

The following are some of the limitations of pattern-based filters:

- Patterns can't allow different sizes of arrays based on the class name.

- Patterns can't match classes based on the supertype or interfaces of the class name.
- Patterns have no state and can't make choices depending on the class instances serialized earlier in the stream.

Note

A pattern-based filter doesn't check interfaces that are implemented by classes being serialized. The filter is invoked for interfaces explicitly referenced in the stream; it isn't invoked for interfaces implemented by classes for objects being serialized.

Define a Pattern-Based Filter for One Application

You can define a pattern-based filter as a system property for one application. A system property supersedes a Security Property value.

To create a filter that only applies to one application, and only to a single invocation of Java, define the `jdk.serialFilter` system property in the command line.

The following example shows how to limit resource usage for an individual application:

```
java -Djdk.serialFilter=maxarray=100000;maxdepth=20;maxrefs=500 com.example.test.Application
```

Define a Pattern-Based Filter for All Applications

You can define a pattern-based, JVM-wide filter that affects every application run with a Java runtime from `$JAVA_HOME` by specifying it as a Security Property. (Note that a system property supersedes a Security Property value.) Edit the file `$JAVA_HOME/conf/security/java.security` and add the pattern-based filter to the `jdk.serialFilter` Security Property.

Define a Class Filter

You can create a pattern-based class filter that is applied globally. For example, the pattern might be a class name or a package with wildcard.

In the following example, the filter rejects one class name from a package (`!example.somepackage.SomeClass`), and allows all other class names in the package:

```
jdk.serialFilter=!example.somepackage.SomeClass;example.somepackage.*;
```

The previous example filter allows all other class names, not just those in `example.somepackage.*`. To reject all other class names, add `!*`:

```
jdk.serialFilter=!example.somepackage.SomeClass;example.somepackage.*;!*
```

Define a Resource Limit Filter

A resource filter limits graph complexity and size. You can create filters for the following parameters to control the resource usage for each application:

- Maximum allowed array size. For example: `maxarray=100000`;
- Maximum depth of a graph. For example: `maxdepth=20`;

- Maximum references in a graph between objects. For example: `maxrefs=500`;
- Maximum number of bytes in a stream. For example: `maxbytes=500000`;

Creating Custom Filters

Custom filters are filters you specify in your application's code. They are set on an individual stream or on all streams in a process. You can implement a custom filter as a pattern, a method, a lambda expression, or a class.

Topics

- [Reading a Stream of Serialized Objects](#)
- [Setting a Custom Filter for an Individual Stream](#)
- [Setting a JVM-Wide Custom Filter](#)
- [Setting a Custom Filter Using a Pattern](#)
- [Setting a Custom Filter as a Class](#)
- [Setting a Custom Filter as a Method](#)
- [Creating a Filter with ObjectInputFilter Methods](#)

Reading a Stream of Serialized Objects

You can set a custom filter on one `ObjectInputStream`, or, to apply the same filter to every stream, set a JVM-wide filter. If an `ObjectInputStream` doesn't have a filter defined for it, the JVM-wide filter is called, if there is one.

While the stream is being decoded, the following actions occur:

- For each new object in the stream and before the object is instantiated and deserialized, the filter is called when it encounters a class for the first time. (Subsequent instances of the same class aren't filtered.)
- For each class in the stream, the filter is called with the resolved class. It is called separately for each supertype and interface in the stream.
- The filter can examine each class referenced in the stream, including the class of objects to be created, supertypes of those classes, and their interfaces.
- For each array in the stream, whether it is an array of primitives, array of strings, or array of objects, the filter is called with the array class and the array length.
- For each reference to an object already read from the stream, the filter is called so it can check the depth, number of references, and stream length. The depth starts at 1 and increases for each nested object and decreases when each nested call returns.
- The filter is not called for primitives or for `java.lang.String` instances that are encoded concretely in the stream.
- The filter returns a status of accept, reject, or undecided.
- Filter actions are logged if logging is enabled.

Unless a filter rejects the object, the object is accepted.

Setting a Custom Filter for an Individual Stream

You can set a filter on an individual `ObjectInputStream` when the input to the stream is untrusted and the filter has a limited set of classes or constraints to enforce. For example, you could ensure that a stream only contains numbers, strings, and other application-specified types.

A custom filter is set using the `setObjectInputFilter` method. The custom filter must be set before objects are read from the stream.

In the following example, the `setObjectInputFilter` method is invoked with the `dateTimeFilter` method. This filter only accepts classes from the `java.time` package. The `dateTimeFilter` method is defined in a code sample in [Setting a Custom Filter as a Method](#).

```
LocalDateTime readDateTime(InputStream is) throws IOException {
    try (ObjectInputStream ois = new ObjectInputStream(is)) {
        ois.setObjectInputFilter(FilterClass::dateTimeFilter);
        return (LocalDateTime) ois.readObject();
    } catch (ClassNotFoundException ex) {
        IOException ioe = new StreamCorruptedException("class missing");
        ioe.initCause(ex);
        throw ioe;
    }
}
```

Setting a JVM-Wide Custom Filter

You can set a JVM-wide filter that applies to every use of `ObjectInputStream` unless it is overridden on a specific stream. If you can identify every type and condition that is needed by the entire application, the filter can allow those and reject the rest. Typically, JVM-wide filters are used to reject specific classes or packages, or to limit array sizes, graph depth, or total graph size.

A JVM-wide filter is set once using the methods of the `ObjectInputFilter.Config` class. The filter can be an instance of a class, a lambda expression, a method reference, or a pattern.

```
ObjectInputFilter filter = ...
ObjectInputFilter.Config.setSerialFilter(filter);
```

In the following example, the JVM-wide filter is set by using a lambda expression.

```
ObjectInputFilter.Config.setSerialFilter(
    info -> info.depth() > 10 ? Status.REJECTED : Status.UNDECIDED);
```

In the following example, the JVM-wide filter is set by using a method reference:

```
ObjectInputFilter.Config.setSerialFilter(FilterClass::dateTimeFilter);
```

Setting a Custom Filter Using a Pattern

A pattern-based custom filter, which is convenient for simple cases, can be created by using the `ObjectInputFilter.Config.createFilter` method. You can create a pattern-based

filter as a system property or Security Property. Implementing a pattern-based filter as a method or a lambda expression gives you more flexibility.

The filter patterns can accept or reject specific names of classes, packages, and modules and can place limits on array sizes, graph depth, total references, and stream size. Patterns cannot match the names of the supertype or interfaces of the class.

In the following example, the filter allows `example.File` and rejects `example.Directory`.

```
ObjectInputFilter filesOnlyFilter =
    ObjectInputFilter.Config.createFilter("example.File;!example.Directory");
```

This example allows only `example.File`. All other class names are rejected.

```
ObjectInputFilter filesOnlyFilter =
    ObjectInputFilter.Config.createFilter("example.File;!*");
```

Setting a Custom Filter as a Class

A custom filter can be implemented as a class implementing the `java.io.ObjectInputFilter` interface, as a lambda expression, or as a method.

A filter is typically stateless and performs checks solely on the input parameters. However, you may implement a filter that, for example, maintains state between calls to the `checkInput` method to count artifacts in the stream.

In the following example, the `FilterNumber` class allows any object that is an instance of the `Number` class and rejects all others.

```
class FilterNumber implements ObjectInputFilter {
    public Status checkInput(FilterInfo filterInfo) {
        Class<?> clazz = filterInfo.serialClass();
        if (clazz != null) {
            return (Number.class.isAssignableFrom(clazz))
                ? ObjectInputFilter.Status.ALLOWED
                : ObjectInputFilter.Status.REJECTED;
        }
        return ObjectInputFilter.Status.UNDECIDED;
    }
}
```

In the example:

- The `checkInput` method accepts an `ObjectInputFilter.FilterInfo` object. The object's methods provide access to the class to be checked, array size, current depth, number of references to existing objects, and stream size read so far.
- If `serialClass` is not null, then the value is checked to see if the class of the object is `Number`. If so, it is accepted and returns `ObjectInputFilter.Status.ALLOWED`. Otherwise, it is rejected and returns `ObjectInputFilter.Status.REJECTED`.
- Any other combination of arguments returns `ObjectInputFilter.Status.UNDECIDED`. Deserialization continues, and any remaining filters are run until the object is accepted or rejected. If there are no other filters, the object is accepted.

Setting a Custom Filter as a Method

A custom filter can also be implemented as a method. The method reference is used instead of an inline lambda expression.

The `dateTimeFilter` method that is defined in the following example is used by the code sample in [Setting a Custom Filter for an Individual Stream](#).

```
public class FilterClass {  
    static ObjectInputFilter.Status  
dateTimeFilter(ObjectInputFilter.FilterInfo info) {  
    Class<?> serialClass = info.serialClass();  
    if (serialClass != null) {  
        return serialClass.getPackageName().equals("java.time")  
            ? ObjectInputFilter.Status.ALLOWED  
            : ObjectInputFilter.Status.REJECTED;  
    }  
    return ObjectInputFilter.Status.UNDECIDED;  
}  
}
```

This custom filter allows only the classes found in the base module of the JDK:

```
static ObjectInputFilter.Status  
baseFilter(ObjectInputFilter.FilterInfo info) {  
    Class<?> serialClass = info.serialClass();  
    if (serialClass != null) {  
        return serialClass.getModule().getName().equals("java.base")  
            ? ObjectInputFilter.Status.ALLOWED  
            : ObjectInputFilter.Status.REJECTED;  
    }  
    return ObjectInputFilter.Status.UNDECIDED;  
}
```

Creating a Filter with ObjectInputFilter Methods

The `ObjectInputFilter` interface includes the following static methods that enable you to quickly create filters:

- `allowFilter(Predicate<Class<?>>, ObjectInputFilter.Status)`
- `rejectFilter(Predicate<Class<?>>, ObjectInputFilter.Status)`
- `rejectUndecidedClass(ObjectInputFilter)`
- `merge(ObjectInputFilter, ObjectInputFilter)`

The `allowFilter` method creates a filter based on a `Predicate` that takes a `Class` as its argument. The created filter returns `ObjectInputFilter.Status.ALLOWED` if the predicate is true. Otherwise, it returns the value of the `allowFilter` method's second argument. The

following creates a filter that accepts the `Integer` class. All other classes are considered undecided:

```
ObjectInputFilter intFilter = ObjectInputFilter.allowFilter(  
    cl -> cl.equals(Integer.class), ObjectInputFilter.Status.UNDECIDED);
```

The `rejectFilter` method is the inverse of `allowFilter`: It creates a filter based on a Predicate that takes a Class as its argument. The created filter returns `ObjectInputFilter.Status.REJECTED` if the predicate is true. Otherwise, it returns the value of the `rejectFilter` method's second argument. The following creates a filter that rejects any class loaded from the application class loader:

```
ObjectInputFilter f = ObjectInputFilter.rejectFilter(cl ->  
    cl.getClassLoader() == ClassLoader.getSystemClassLoader(),  
    Status.UNDECIDED);
```

The `rejectUndecidedClass` method creates a new filter based on an existing filter by rejecting any class that the existing filter considers as undecided. The following creates a filter based on `intFilter`. It accepts the `Integer` class but rejects all other (undecided) classes:

```
ObjectInputFilter rejectUndecidedFilter =  
    ObjectInputFilter.rejectUndecidedClass(intFilter);
```

The `merge` method creates a new filter by merging two filters. The following merges the filters `intFilter` and `f`. It accepts the `Integer` class but rejects any class loaded from the application class loader:

```
ObjectInputFilter mergedFilter = ObjectInputFilter.merge(intFilter, f);
```

A merged filter follows these steps when it filters a class:

1. Return `Status.REJECTED` if either of its filters return `Status.REJECTED`.
2. Return `Status.ACCEPTED` if either of its filters return `Status.ACCEPTED`.
3. Return `Status.UNDECIDED` (both of its filters return `Status.UNDECIDED`).

The `merge` method is useful in filter factories. Every time a filter is set on a stream, you can append that filter to the one that the filter factory creates with the `merge` method. See the [ObjectInputFilter](#) API documentation for an example.

Note

It's a good idea to merge the JVM-wide filter with the requested, stream-specific filter in your filter factory. If you just return the requested filter, then you effectively disable the JVM-wide filter, which will lead to security gaps.

Setting a Filter Factory

A filter factory is a `BinaryOperator`, which is a function of two operands that chooses the filter for a stream. You can set a filter factory by calling the method

`ObjectInputFilter.Config.setSerialFilterFactory` or specifying it in a system or Security property.

① Note

You can set a filter factory exactly once, either with the method `setSerialFilterFactory`, in the system property `jdk.serialFilterFactory`, or in the Security Property `jdk.serialFilterFactory`.

Topics:

- [Setting a Filter Factory with `setSerialFilterFactory`](#)
- [Specifying a Filter Factory in a System or Security Property](#)

Setting a Filter Factory with `setSerialFilterFactory`

When you set a filter factory by calling the method

`ObjectInputFilter.Config.setSerialFilterFactory`, the filter factory's method `BinaryOperator<ObjectInputFilter>.apply(ObjectInputFilter t, ObjectInputFilter u)` will be invoked when an `ObjectInputStream` is constructed and when a stream-specific filter is set on an `ObjectInputStream`. The parameter `t` is the current filter and `u` is the requested filter. When `apply` is first invoked, `t` will be null. If a JVM-wide filter has been set, then when `apply` is first invoked, `u` will be the JVM-wide filter. Otherwise, `u` will be null. The `apply` method (which you must implement yourself) returns the filter to be used for the stream. If `apply` is invoked again, then the parameter `t` will be this returned filter. When you set a filter with the method `ObjectInputStream.setObjectInputFilter(ObjectInputFilter)`, then parameter `u` will be this filter.

The following example implements a simple filter factory that prints its `ObjectInputFilter` parameters every time its `apply` method is invoked, merges these parameters into one combined filter, then returns this merged filter.

```
public class SimpleFilterFactory {

    static class MySimpleFilterFactory implements
BinaryOperator<ObjectInputFilter> {
        public ObjectInputFilter apply(
            ObjectInputFilter curr, ObjectInputFilter next) {
            System.out.println("Current filter: " + curr);
            System.out.println("Requested filter: " + next);
            return ObjectInputFilter.merge(next, curr);
        }
    }

    private static byte[] createSimpleStream(Object obj) {
        ByteArrayOutputStream boas = new ByteArrayOutputStream();
        try (ObjectOutputStream ois = new ObjectOutputStream(boas)) {
            ois.writeObject(obj);
            return boas.toByteArray();
        } catch (IOException ioe) {
            ioe.printStackTrace();
        }
        throw new RuntimeException();
    }
}
```

```
}

public static void main(String[] args) throws IOException {

    // Set a filter factory

    MySimpleFilterFactory contextFilterFactory = new
MySimpleFilterFactory();

    ObjectInputFilter.Config.setSerialFilterFactory(contextFilterFactory);

    // Set a stream-specific filter

    ObjectInputFilter filter1 =
        ObjectInputFilter.Config.createFilter("example.*;java.base/*;!*");
    ObjectInputFilter.Config.setSerialFilter(filter1);

    // Create another filter

    ObjectInputFilter intFilter = ObjectInputFilter.allowFilter(
        cl -> cl.equals(Integer.class),
ObjectInputFilter.Status.UNDECIDED);

    // Create input stream

    byte[] intByteStream = createSimpleStream(42);
    InputStream is = new ByteArrayInputStream(intByteStream);
    ObjectInputStream ois = new ObjectInputStream(is);
    ois.setObjectInputFilter(intFilter);

    try {
        Object obj = ois.readObject();
        System.out.println("Read obj: " + obj);
    } catch (ClassNotFoundException e) {
        e.printStackTrace();
    }
}
}
```

This example prints output similar to the following (line breaks have been added for clarity):

```
Current filter: null
Requested filter: example.*;java.base/*;!*
Current filter: example.*;java.base/*;!*
Requested filter:
    merge(
        predicate(
            SimpleFilterFactory$$Lambda$8/0x0000000800c00c60@76ed5528,
            ifTrue: ALLOWED, ifFalse: UNDECIDED),
        predicate(
            SimpleFilterFactory$$Lambda$9/0x0000000800c01800@2c7b84de,
            ifTrue: REJECTED, ifFalse: UNDECIDED)))
Read obj: 42
```

The `apply` method is invoked twice: when the `ObjectInputStream` is created and when the method `setObjectInputFilter` is called.

 **Note**

- You can set a filter on an `ObjectInputStream` only once. An `IllegalStateException` will be thrown otherwise.
- To protect against unexpected deserializations, ensure that security experts thoroughly review how your filter factories select and combine filters.

Specifying a Filter Factory in a System or Security Property

You can set a filter factory that applies to only one application and to only a single invocation of Java by specifying it in the `jdk.serialFilterFactory` system property in the command line:

```
java -Djdk.serialFilterFactory=FilterFactoryClassName YourApplication
```

The value of `jdk.serialFilterFactory` is the class name of the filter factory to be set before the first deserialization. The class must be public and accessible to the application class loader (which the method [java.lang.ClassLoader.getSystemClassLoader\(\)](#) returns).

You can set a JVM-wide filter factory that affects every application run with a Java runtime from `$JAVA_HOME` by specifying it in a Security Property. Note that a system property supersedes a Security Property value. Edit the file `$JAVA_HOME/conf/security/java.security` and specify the filter factory's class name in the `jdk.serialFilterFactory` Security Property.

Built-in Filters

The Java Remote Method Invocation (RMI) Registry, the RMI Distributed Garbage Collector, and Java Management Extensions (JMX) all have filters that are included in the JDK. You should specify your own filters for the RMI Registry and the RMI Distributed Garbage Collector to add additional protection.

Filters for RMI Registry

 **Note**

Use these built-in filters as starting points only. Edit the `sun.rmi.registry.registryFilter` system property to configure reject-lists and/or extend the allow-list to add additional protection for the RMI Registry. To protect the whole application, add the patterns to the `jdk.serialFilter` global system property to increase protection for other serialization users that do not have their own custom filters.

The RMI Registry has a built-in allow-list filter that allows objects to be bound in the registry. It includes instances of the `java.rmi.Remote`, `java.lang.Number`, `java.lang.reflect.Proxy`, `java.rmi.server.UnicastRef`, `java.rmi.server.UID`, `java.rmi.server.RMIClientSocketFactory`, and `java.rmi.server.RMIServerSocketFactory` classes.

The built-in filter includes size limits:

```
maxarray=1000000;maxdepth=20
```

Supersede the built-in filter by defining a filter using the `sun.rmi.registry.registryFilter` system property with a pattern. If the filter that you define either accepts classes passed to the filter, or rejects classes or sizes, the built-in filter is not invoked. If your filter does not accept or reject anything, the built-filter is invoked.

Filters for RMI Distributed Garbage Collector

ⓘ Note

Use these built-in filters as starting points only. Edit the `sun.rmi.transport.dgcFilter` system property to configure reject-lists and/or extend the allow-list to add additional protection for Distributed Garbage Collector. To protect the whole application, add the patterns to the `jdk.serialFilter` global system property to increase protection for other serialization users that do not have their own custom filters.

The RMI Distributed Garbage Collector has a built-in allow-list filter that accepts a limited set of classes. It includes instances of the `java.rmi.server.ObjID`, `java.rmi.server.UID`, `java.rmi.dgc.VMID`, and `java.rmi.dgc.Lease` classes.

The built-in filter includes size limits:

```
maxarray=1000000;maxdepth=20
```

Supersede the built-in filter by defining a filter using the `sun.rmi.transport.dgcFilter` system property with a pattern. If the filter accepts classes passed to the filter, or rejects classes or sizes, the built-in filter is not invoked. If the superseding filter does not accept or reject anything, the built-filter is invoked.

Filters for JMX

ⓘ Note

Use these built-in filters as starting points only. Edit the `com.sun.management.jmxremote.serial.filter.pattern` management property to configure reject-lists and/or extend the allow-list to add additional protection for JMX. To protect the whole application, add the patterns to the `jdk.serialFilter` global system property to increase protection for other serialization users that do not have their own custom filters.

JMX has a built-in filter to limit a set of classes allowed to be sent as a deserializing parameters over RMI to the server. That filter is disabled by default. To enable the filter, define the `com.sun.management.jmxremote.serial.filter.pattern` management property with a pattern.

The pattern must include the types that are allowed to be sent as parameters over RMI to the server and all types that they depend on, plus `javax.management.ObjectName` and `java.rmi.MarshalledObject` types. For example, to limit the allowed set of classes to Open

MBean types and the types that they depend on, add the following line to `management.properties` file:

```
com.sun.management.jmxremote.serial.filter.pattern=java.lang.*;java.math.BigInteger;java.math.BigDecimal;java.util.*;javax.management.openmbean.*;javax.management.ObjectName;java.rmi.MarshalledObject;!*
```

Logging Filter Actions

You can turn on logging to record the initialization, rejections, and acceptances of calls to serialization filters. Use the log output as a diagnostic tool to see what's being deserialized, and to confirm your settings when you configure allow-lists and reject-lists.

When logging is enabled, filter actions are logged to the `java.io.serialization` logger.

To enable serialization filter logging, edit the `$JDK_HOME/conf/logging.properties` file.

To log calls that are rejected, add

```
java.io.serialization.level = FINE
```

To log all filter results, add

```
java.io.serialization.level = FINEST
```

3

Enhanced Deprecation

The semantics of what deprecation means includes whether an API may be removed in the near future.

If you are a library maintainer, you can take advantage of the updated deprecation syntax to inform users of your library about the status of APIs provided by your library.

If you are a library or application developer, you can use the `jdeprscan` tool to find uses of deprecated JDK API elements in your applications or libraries.

Topics

- [Deprecation in the JDK](#)
- [How to Deprecate APIs](#)
- [Notifications and Warnings](#)
- [Running jdeprscan](#)

Deprecation in the JDK

Deprecation is a notification to library consumers that they should migrate code from a deprecated API.

In the JDK, APIs have been deprecated for widely varying reasons, such as:

- The API is dangerous (for example, the `Thread.stop` method).
- There is a simple rename (for example, `AWT Component.show/hide` replaced by `setVisible`).
- A newer, better API can be used instead.
- The API is going to be removed.

In prior releases, APIs were deprecated but rarely ever removed. Starting with JDK 9, APIs may be marked as deprecated for removal. This indicates that the API is eligible to be removed in the next release of the JDK platform. If your application or library consumes any of these APIs, then you should plan to migrate from them soon.

For a list of deprecated APIs in the current release of the JDK, see the [Deprecated API](#) page in the API specification.

How to Deprecate APIs

Deprecating an API requires using two different mechanisms: the `@Deprecated` annotation and the `@deprecated` JavaDoc tag.

The `@Deprecated` annotation marks an API in a way that is recorded in the class file and is available at runtime. This allows various tools, such as `javac` and `jdeprscan`, to detect and flag usage of deprecated APIs. The `@deprecated` JavaDoc tag is used in documentation of deprecated APIs, for example, to describe the reason for deprecation, and to suggest alternative APIs.

Note the capitalization: the annotation starts with an uppercase *D* and the JavaDoc tag starts with a lowercase *d*.

Using the @Deprecated Annotation

To indicate deprecation, precede the module, class, method, or member declaration with `@Deprecated`. The annotation contains these elements:

- `@Deprecated(since=<version>)`
 - `<version>` identifies the version in which the API was deprecated. This is for informational purposes. The default is the empty string ("").
- `@Deprecated(forRemoval=<boolean>)`
 - `forRemoval=true` indicates that the API is subject to removal in a future release.
 - `forRemoval=false` recommends that code should no longer use this API; however, there is no current intent to remove the API. This is the default value.

For example: `@Deprecated(since="9" , forRemoval=true)`

The `@Deprecated` annotation causes the JavaDoc-generated documentation to be marked with one of the following, wherever that program element appears:

- **Deprecated.**
- **Deprecated, for removal: This API element is subject to removal in a future version.**

The `javadoc` tool generates a page named `deprecated-list.html` containing the list of deprecated APIs, and adds a link in the navigation bar to that page.

The following is a simple example of using the `@Deprecated` annotation from the `java.lang.Thread` class:

```
public class Thread implements Runnable {  
    ...  
    @Deprecated(since="1.2")  
    public final void stop() {  
        ...  
    }  
    ...  
}
```

Semantics of Deprecation

The two elements of the `@Deprecated` annotation give developers the opportunity to clarify what deprecation means for their exported APIs (which are APIs that are provided by a library that are accessible to code outside of that library, such as applications or other libraries).

For the JDK platform:

- `@Deprecated(forRemoval=true)` indicates that the API is eligible to be removed in a future release of the JDK platform.
- `@Deprecated(since=<version>)` contains the JDK version string that indicates when the API element was deprecated, for those deprecated in JDK 9 and beyond.

If you maintain libraries and produce your own APIs, then you probably use the `@Deprecated` annotation. You should determine and communicate your policy around API removals. For example, if you release a new library every six weeks, then you may choose to deprecate an API for removal, but not remove it for several months to give your customers time to migrate.

Using the @deprecated JavaDoc Tag

Use the `@deprecated` tag in the JavaDoc comment of any deprecated program element to indicate that it should no longer be used (even though it may continue to work). This tag is valid in all class, method, or field documentation comments. The `@deprecated` tag must be followed by a space or a newline. In the paragraph following the `@deprecated` tag, explain why the item was deprecated, and suggest what to use instead. Mark the text that refers to new versions of the same functionality with an `@link` tag.

When it encounters an `@deprecated` tag, the `javadoc` tool moves the text following the `@deprecated` tag to the front of the description and precedes it with a warning. For example, this source:

```
/**  
 * ...  
 * @deprecated This method does not properly convert bytes into  
 * characters. As of JDK 1.1, the preferred way to do this is via the  
 * {@code String} constructors that take a {@link  
 * java.nio.charset.Charset}, charset name, or that use the platform's  
 * default charset.  
 * ...  
 */  
@Deprecated(since="1.1")  
public String(byte ascii[], int hibyte) {  
    ...  
}
```

generates the following output:

```
@Deprecated(since="1.1")  
public String(byte[] ascii,  
             int hibyte)  
Deprecated. This method does not properly convert bytes into characters. As  
of  
JDK 1.1, the preferred way to do this is via the String constructors that  
take a  
Charset, charset name, or that use the platform's default charset.
```

If you use the `@deprecated` JavaDoc tag without the corresponding `@Deprecated` annotation, a warning is generated.

Notifications and Warnings

When an API is deprecated, developers must be notified. The deprecated API may cause problems in your code, or, if it is eventually removed, cause failures at run time.

The Java compiler generates warnings about deprecated APIs. There are options to generate more information about warnings, and you can also suppress deprecation warnings.

Compiler Deprecation Warnings

If the deprecation is `forRemoval=false`, the Java compiler generates an "ordinary deprecation warning". If the deprecation is `forRemoval=true`, the compiler generates a "removal warning".

The two kinds of warnings are controlled by separate `-Xlint` flags: `-Xlint:deprecation` and `-Xlint:removal`. The `javac -Xlint:removal` option is enabled by default, so removal warnings are shown.

The warnings can also be turned off independently (note the `"-"`): `-Xlint:-deprecation` and `-Xlint:-removal`.

This is an example of an ordinary deprecation warning.

```
$ javac src/example/DeprecationExample.java
Note: src/example/DeprecationExample.java uses or overrides a deprecated
API.
Note: Recompile with -Xlint:deprecation for details.
```

Use the `javac -Xlint:deprecation` option to see what API is deprecated.

```
$ javac -Xlint:deprecation src/example/DeprecationExample.java
src/example/DeprecationExample.java:12: warning: [deprecation]
getSelectedValues() in JList has been deprecated
    Object[] values = jlist.getSelectedValues();
                           ^
1 warning
```

Here is an example of a removal warning.

```
public class RemovalExample {
    public static void main(String[] args) {
        System.runFinalizersOnExit(true);
    }
}
$ javac RemovalExample.java
RemovalExample.java:3: warning: [removal] runFinalizersOnExit(boolean) in
System
has been deprecated and marked for removal
    System.runFinalizersOnExit(true);
                           ^
1 warning
=====
```

Suppressing Deprecation Warnings

The `javac -Xlint` options control warnings for all files compiled in a particular run of `javac`. You may have identified specific locations in source code that generate warnings that you no longer want to see. You can use the `@SuppressWarnings` annotation to suppress warnings whenever that code is compiled. Place the `@SuppressWarnings` annotation at the declaration of the class, method, field, or local variable that uses the deprecated API.

The `@SuppressWarnings` options are:

- `@SuppressWarnings("deprecation")` — Suppresses only the ordinary deprecation warnings.
- `@SuppressWarnings("removal")` — Suppresses only the removal warnings.
- `@SuppressWarnings({"deprecation", "removal"})` — Suppresses both types of warnings.

Here's an example of suppressing a warning.

```
@SuppressWarnings( "deprecation" )
Object[] values = jlist.getSelectedValues();
```

With the `@SuppressWarnings` annotation, no warnings are issued for this line, even if warnings are enabled on the command line.

Running jdeprscan

`jdeprscan` is a static analysis tool that reports on an application's use of deprecated JDK API elements. Run `jdeprscan` to help identify possible issues in compiled class files or jar files.

You can find out about deprecated JDK APIs from the compiler notifications. However, if you don't recompile with every JDK release, or if the warnings were suppressed, or if you depend on third-party libraries that are distributed as binary artifacts, then you should run `jdeprscan`.

It's important to discover dependencies on deprecated APIs before the APIs are removed from the JDK. If the binary uses an API that is deprecated for removal in the current JDK release, and you don't recompile, then you won't get any notifications. When the API is removed in a future JDK release, then the binary will simply fail at runtime. `jdeprscan` lets you detect such usage now, well before the API is removed.

For the complete syntax of how to run the tool and how to interpret the output, see [The jdeprscan Command](#) in the *Java Development Kit Tool Specifications*.

XML Catalog API

Use the XML Catalog API to implement a local XML catalog.

Java SE 9 introduced a new XML Catalog API to support the Organization for the Advancement of Structured Information Standards (OASIS) [XML Catalogs, OASIS Standard V1.1, 7 October 2005](#). This chapter of the Core Libraries Guide describes the API, its support by the Java XML processors, and usage patterns.

The XML Catalog API is a straightforward API for implementing a local catalog, and the support by the JDK XML processors makes it easier to configure your processors or the entire environment to take advantage of the feature.

Learning More About Creating Catalogs

To learn about creating catalogs, see [XML Catalogs, OASIS Standard V1.1, 7 October 2005](#). The XML catalogs under the directory `/etc/xml/catalog` on some Linux distributions can also be a good reference for creating a local catalog.

Purpose of XML Catalog API

The XML Catalog API and the Java XML processors provide an option for developers and system administrators to manage external resources.

The XML Catalog API provides an implementation of OASIS XML Catalogs v1.1, a standard designed to address issues caused by external resources.

Problems Caused by External Resources

XML, XSD and XSL documents may contain references to external resources that Java XML processors need to retrieve to process the documents. External resources can cause a problem for the applications or the system. The Catalog API and the Java XML processors provide an option for developers and system administrators to manage these external resources.

External resources can cause a problem for the application or the system in these areas:

- **Availability:** If a resource is remote, then XML processors must be able to connect to the remote server hosting the resource. Even though connectivity is rarely an issue, it's still a factor in the stability of an application. Too many connections can be a hazard to servers that hold the resources, and this in turn could affect your applications. See [Use Catalog with XML Processors](#) for an example that solves this issue using the XML Catalog API.
- **Performance.** Although in most cases connectivity isn't an issue, a remote fetch can still cause a performance issue for an application. Furthermore, there may be multiple applications on the same system attempting to resolve the same resource, and this would be a waste of system resources.
- **Security:** Allowing remote connections can pose a security risk if the application processes untrusted XML sources.
- **Manageability:** If a system processes a large number of XML documents, then externally referenced documents, whether local or remote, can become a maintenance hassle.

How XML Catalog API Addresses Problems Caused by External Resources

Application developers can create a local catalog of all external references for the application, and let the Catalog API resolve them for the application. This not only avoids remote connections but also makes it easier to manage these resources.

System administrators can establish a local catalog for the system and configure the Java VM to use the catalog. Then, all of the applications on the system may share the same catalog without any code changes to the applications, assuming that they're compatible with Java SE 9. To establish a catalog, you may take advantage of existing catalogs such as those included with some Linux distributions.

XML Catalog API Interfaces

Access the XML Catalog API through its interfaces.

XML Catalog API Interfaces

The XML Catalog API defines the following interfaces:

- The Catalog interface represents an entity catalog as defined by [XML Catalogs, OASIS Standard V1.1, 7 October 2005](#). A Catalog object is immutable. After it's created, the Catalog object can be used to find matches in a system, public, or uri entry. A custom resolver implementation may find it useful to locate local resources through a catalog.
- The CatalogFeatures class provides the features and properties the Catalog API supports, including javax.xml.catalog.files, javax.xml.catalog.defer, javax.xml.catalog.prefer, and javax.xml.catalog.resolve.
- The CatalogManager class manages the creation of XML catalogs and catalog resolvers.
- The CatalogResolver interface is a catalog resolver that implements SAX EntityResolver, StAX XMLResolver, DOM LS LSResourceResolver used by schema validation, and transform URIResolver. This interface resolves external references using catalogs.

Details on the CatalogFeatures Class

The catalog features are collectively defined in the CatalogFeatures class. The features are defined at the API and system levels, which means that they can be set through the API, system properties, and JAXP properties. To set a feature through the API, use the CatalogFeatures class.

The following code sets javax.xml.catalog.resolve to continue so that the process continues even if no match is found by the CatalogResolver:

```
CatalogFeatures f = CatalogFeatures.builder().with(Feature.RESOLVE,  
"continue").build();
```

To set this continue functionality system-wide, use the Java command line or System.setProperty method:

```
System.setProperty(Feature.RESOLVE.getPropertyName(), "continue");
```

To set this `continue` functionality for the whole JVM instance, enter a line in the `jaxp.properties` file:

```
javax.xml.catalog.resolve = "continue"
```

The `jaxp.properties` file is typically in the `$JAVA_HOME/conf` directory.

The `resolve` property, as well as the `prefer` and `defer` properties, can be set as an attribute of the catalog or group entry in a catalog file. For example, in the following catalog, the `resolve` attribute is set with the value `continue`. The attribute can also be set on the group entry as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<catalog
  xmlns="urn:oasis:names:tc:entity:xmlns:xml:catalog"
  resolve="continue"
  xml:base="http://local/base/dtd/">
  <group resolve="continue">
    <system
      systemId="http://remote/dtd/alice/docAlice.dtd"
      uri="http://local/dtd/docAliceSys.dtd"/>
  </group>
</catalog>
```

Properties set in a narrower scope override those that are set in a wider one. Therefore, a property set through the API always takes preference.

Using the XML Catalog API

Resolve DTD, entity, and alternate URI references in XML source documents using the various entry types of the XML Catalog standard.

The XML Catalog Standard defines a number of entry types. Among them, the system entries, including `system`, `rewriteSystem`, and `systemSuffix` entries, are used for resolving DTD and entity references in XML source documents, whereas `uri` entries are for alternate URI references.

System Reference

Use a `CatalogResolver` object to locate a local resource.

Locating a Local Resource

The following example demonstrates how to use a `CatalogResolver` object to locate a local resource.

Consider the following XML file:

```
<?xml version="1.0"?>
<!DOCTYPE catalogtest PUBLIC "-//OPENJDK//XML CATALOG DTD//1.0"
  "http://openjdk.java.net/xml/catalog/dtd/example.dtd">

<catalogtest>
```

```
Test &example; entry
</catalogtest>
```

The example.dtd file defines an entity example:

```
<!ENTITY example "system">
```

However, the URI to the example.dtd file in the XML file doesn't need to exist. The purpose is to provide a unique identifier for the CatalogResolver object to locate a local resource. To do this, create a catalog entry file called catalog.xml with a system entry to refer to the local resource:

```
<?xml version="1.0" encoding="UTF-8"?>
<catalog xmlns="urn:oasis:names:tc:entity:xmlns:xml:catalog">
  <system
    systemId="http://openjdk.java.net/xml/catalog/dtd/example.dtd"
    uri="example.dtd"/>
</catalog>
```

With this catalog entry file and the system entry, all you need to do is get a default CatalogFeatures object and set the URI to the catalog entry file to create a CatalogResolver object:

```
CatalogResolver cr =
  CatalogManager.catalogResolver(CatalogFeatures.defaults(), catalogUri);
```

catalogUri must be a valid URI. For example:

```
URI.create("file:///users/auser/catalog/catalog.xml")
```

The CatalogResolver object can now be used as a JDK XML resolver. In the following example, it's used as a SAX EntityResolver:

```
SAXParserFactory factory = SAXParserFactory.newInstance();
factory.setNamespaceAware(true);
XMLReader reader = factory.newSAXParser().getXMLReader();
reader.setEntityResolver(cr);
```

Notice that in the example the system identifier is given an absolute URI. That makes it easy for the resolver to find the match with exactly the same systemId in the catalog's system entry.

If the system identifier in the XML is relative, then it may complicate the matching process because the XML processor may have made it absolute with a specified base URI or the source file's URI. In that situation, the systemId of the system entry would need to match the anticipated absolute URI. An easier solution is to use the systemSuffix entry, for example:

```
<systemSuffix systemIdSuffix="example.dtd" uri="example.dtd"/>
```

The systemSuffix entry matches any reference that ends with example.dtd in an XML source and resolves it to a local example.dtd file as specified in the uri attribute. You may add more to the systemId to ensure that it's unique or the correct reference. For example, you may set

the `systemIdSuffix` to `xml/catalog/dtd/example.dtd`, or rename the `id` in both the XML source file and the `systemSuffix` entry to make it a unique match, for example `my_example.dtd`.

The URI of the `system` entry can be absolute or relative. If the external resources have a fixed location, then an absolute URI is more likely to guarantee uniqueness. If the external resources are placed relative to your application or the catalog entry file, then a relative URI may be more effective, allowing the deployment of your application without knowing where it's installed. Such a relative URI then is resolved using the base URI or the catalog file's URI if the base URI isn't specified. In the previous example, `example.dtd` is assumed to have been placed in the same directory as the catalog file.

Public Reference

Use a `public` entry instead of a `system` entry to find a desired resource.

If no `system` entry matches the desired resource, and the `PREFER` property is specified to match `public`, then a `public` entry can do the same as a `system` entry. Note that `public` is the default setting for the `PREFER` property.

Using a Public Entry

When the DTD reference in the parsed XML file contains a public identifier such as `"-//OPENJDK//XML CATALOG DTD//1.0"`, a `public` entry can be written as follows in the catalog entry file:

```
<public publicId="-//OPENJDK//XML CATALOG DTD//1.0" uri="example.dtd"/>
```

When you create and use a `CatalogResolver` object with this entry file, the `example.dtd` resolves through the `publicId` property. See [System Reference](#) for an example of creating a `CatalogResolver` object.

URI Reference

Use a `uri` entry to find a desired resource.

The URI type entries, including `uri`, `rewriteURI`, and `uriSuffix`, can be used in a similar way as the `system` type entries.

Using URI Entries

While the XML Catalog Standard gives a preference to the `system` type entries for resolving DTD references, and `uri` type entries for everything else, the Java XML Catalog API doesn't make that distinction. This is because the specifications for the existing Java XML Resolvers, such as `XMLResolver` and `LSResourceResolver`, doesn't give a preference. The `uri` type entries, including `uri`, `rewriteURI`, and `uriSuffix`, can be used in a similar way as the `system` type entries. The `uri` elements are defined to associate an alternate URI reference with a URI reference. In the case of `system` reference, this is the `systemId` property.

You may therefore replace the `system` entry with a `uri` entry in the following example, although `system` entries are more generally used for DTD references.

```
<system
  systemId="http://openjdk.java.net/xml/catalog/dtd/example.dtd"
  uri="example.dtd"/>
```

A `uri` entry would look like the following:

```
<uri name="http://openjdk.java.net/xml/catalog/dtd/example.dtd"
uri="example.dtd"/>
```

While `system` entries are frequently used for DTDs, `uri` entries are preferred for URI references such as XSD and XSL import and include. The next example uses a `uri` entry to resolve a XSL import.

As described in [XML Catalog API Interfaces](#), the XML Catalog API defines the `CatalogResolver` interface that extends Java XML Resolvers including `EntityResolver`, `XMLResolver`, `URIResolver`, and `LSResolver`. Therefore, a `CatalogResolver` object can be used by SAX, DOM, StAX, Schema Validation, as well as XSLT Transform. The following code creates a `CatalogResolver` object with default feature settings:

```
CatalogResolver cr =
    CatalogManager.catalogResolver(CatalogFeatures.defaults(), catalogUri);
```

The code then registers this `CatalogResolver` object on a `TransformerFactory` class where a `URIResolver` object is expected:

```
TransformerFactory factory = TransformerFactory.newInstance();
factory.setURIResolver(cr);
```

Alternatively the code can register the `CatalogResolver` object on the `Transformer` object:

```
Transformer transformer = factory.newTransformer(xslSource);
transformer.setURIResolver(cr);
```

Assuming the XSL source file contains an `import` element to import the `xslImport.xsl` file into the XSL source:

```
<xsl:import href="path/to/xslImport.xsl"/>
```

To resolve the `import` reference to where the import file is actually located, a `CatalogResolver` object should be set on the `TransformerFactory` class before creating the `Transformer` object, and a `uri` entry such as the following must be added to the catalog entry file:

```
<uri name="path/to/xslImport.xsl" uri="xslImport.xsl"/>
```

The discussion about absolute or relative URIs and the use of `systemSuffix` or `uriSuffix` entries with the `system` reference applies to the `uri` entries as well.

Java XML Processors Support

Use the XML Catalogs features with the standard Java XML processors.

The XML Catalogs features are supported throughout the Java XML processors, including SAX and DOM (`javax.xml.parsers`), and StAX parsers (`javax.xml.stream`), schema validation (`javax.xml.validation`), and XML transformation (`javax.xml.transform`).

This means that you don't need to create a `CatalogResolver` object outside an XML processor. Catalog files can be registered directly to the Java XML processor, or specified through system properties, or in the `jaxp.properties` file. The XML processors perform the mappings through the catalogs automatically.

Enable Catalog Support

To enable the support for the XML Catalogs feature on a processor, the `USE_CATALOG` feature must be set to `true`, and at least one catalog entry file specified.

`USE_CATALOG`

A Java XML processor determines whether the XML Catalogs feature is supported based on the value of the `USE_CATALOG` feature. By default, `USE_CATALOG` is set to `true` for all JDK XML Processors. The Java XML processor further checks for the availability of a catalog file, and attempts to use the XML Catalog API only when the `USE_CATALOG` feature is `true` and a catalog is available.

The `USE_CATALOG` feature is supported by the XML Catalog API, the system property, and the `jaxp.properties` file. For example, if `USE_CATALOG` is set to `true` and it's desirable to disable the catalog support for a particular processor, then this can be done by setting the `USE_CATALOG` feature to `false` through the processor's `setFeature` method. The following code sets the `USE_CATALOG` feature to the specified value `useCatalog` for an `XMLReader` object:

```
SAXParserFactory spf = SAXParserFactory.newInstance();
spf.setNamespaceAware(true);
XMLReader reader = spf.newSAXParser().getXMLReader();
if (setUseCatalog) {
    reader.setFeature(XMLConstants.USE_CATALOG, useCatalog);
}
```

On the other hand, if the entire environment must have the catalog turned off, then this can be done by configuring the `jaxp.properties` file with a line:

```
javax.xml.useCatalog = false;
```

`javax.xml.catalog.files`

The `javax.xml.catalog.files` property is defined by the XML Catalog API and supported by the JDK XML processors, along with other catalog features. To employ the catalog feature on a parsing, validating, or transforming process, all that's needed is to set the `FILES` property on the processor, through its system property or using the `jaxp.properties` file.

`Catalog URI`

The catalog file reference must be a valid URI, such as `file:///users/auser/catalog/catalog.xml`.

The URI reference in a system or a URI entry in the catalog file can be absolute or relative. If they're relative, then they are resolved using the catalog file's URI or a base URI if specified.

`Using system or uri Entries`

When using the XML Catalog API directly (see [XML Catalog API Interfaces](#) for an example), `system` and `uri` entries both work when using the JDK XML Processors' native support of the `CatalogFeatures` class. In general, `system` entries are searched first, then `public` entries, and

if no match is found then the processor continues searching `uri` entries. Because both `system` and `uri` entries are supported, it's recommended that you follow the custom of XML specifications when selecting between using a `system` or `uri` entry. For example, DTDs are defined with a `systemId` and therefore `system` entries are preferable.

Use Catalog with XML Processors

Use the XML Catalog API with various Java XML processors.

The XML Catalog API is supported throughout JDK XML processors. The following sections describe how it can be enabled for a particular type of processor.

Use Catalog with DOM

To use a catalog with DOM, set the `FILES` property on a `DocumentBuilderFactory` instance as demonstrated in the following code:

```
static final String CATALOG_FILE =
CatalogFeatures.Feature.FILES.getPropertyName();
DocumentBuilderFactory dbf = DocumentBuilderFactory.newInstance();
dbf.setNamespaceAware(true);
if (catalog != null) {
    dbf.setAttribute(CATALOG_FILE, catalog);
}
```

Note that `catalog` is a URI to a catalog file. For example, it could be something like "file:///users/auser/catalog/catalog.xml".

It's best to deploy resolving target files along with the catalog entry file, so that the files can be resolved relative to the catalog file. For example, if the following is a `uri` entry in the catalog file, then the `XSLImport_html.xsl` file will be located at `/users/auser/catalog/XSLImport_html.xsl`.

```
<uri name="path/to/XSLImport_html.xsl" uri="XSLImport_html.xsl"/>
```

Use Catalog with SAX

To use the Catalog feature on a SAX parser, set the catalog file to the `SAXParser` instance:

```
SAXParserFactory spf = SAXParserFactory.newInstance();
spf.setNamespaceAware(true);
spf.setXIncludeAware(true);
SAXParser parser = spf.newSAXParser();
parser.setProperty(CATALOG_FILE, catalog);
```

In the prior sample code, note the statement `spf.setXIncludeAware(true)`. When this is enabled, any `XInclude` is resolved using the catalog as well.

Given an XML file `XI_simple.xml`:

```
<simple>
  <test xmlns:xinclude="http://www.w3.org/2001/XInclude">
    <latin1>
      <firstElement/>
    <xinclude:include href="path/to/XI_text.xml" parse="text" />
  </test>
</simple>
```

```
<insideChildren/>
<another>
  <deeper>text</deeper>
</another>
</latin1>
<test2>
  <xinclude:include href="path/to/XI_test2.xml"/>
</test2>
</test>
</simple>
```

Additionally, given another XML file `XI_test2.xml`:

```
<?xml version="1.0"?>
<!-- comment before root -->
<!DOCTYPE red SYSTEM "path/to/XI_red.dtd">
<red xmlns:xinclude="http://www.w3.org/2001/XInclude">
  <blue>
    <xinclude:include href="path/to/XI_text.xml" parse="text"/>
  </blue>
</red>
```

Assume another text file, `XI_text.xml`, contains a simple string, and the file `XI_red.dtd` is as follows:

```
<!ENTITY red "it is read">
```

In these XML files, there is an `XInclude` element inside an `XInclude` element, and a reference to a DTD. Assuming they are located in the same folder along with the catalog file `CatalogSupport.xml`, add the following catalog entries to map them:

```
<uri name="path/to/XI_text.xml" uri="XI_text.xml"/>
<uri name="path/to/XI_test2.xml" uri="XI_test2.xml"/>
<system systemId="path/to/XI_red.dtd" uri="XI_red.dtd"/>
```

When the `parser.parse` method is called to parse the `XI_simple.xml` file, it's able to locate the `XI_test2.xml` file in the `XI_simple.xml` file, and the `XI_text.xml` file and the `XI_red.dtd` file in the `XI_test2.xml` file through the specified catalog.

Use Catalog with StAX

To use the catalog feature with a StAX parser, set the catalog file on the `XMLInputFactory` instance before creating the `XMLStreamReader` object:

```
XMLInputFactory factory = XMLInputFactory.newInstance();
factory.setProperty(CatalogFeatures.Feature.FILES.getPropertyName(), catalog);
XMLStreamReader streamReader =
  factory.createXMLStreamReader(xml, new FileInputStream(xml));
```

When the `XMLStreamReader` `streamReader` object is used to parse the XML source, external references in the source are then resolved in accordance with the specified entries in the catalog.

Note that unlike the `DocumentBuilderFactory` class that has both `setFeature` and `setAttribute` methods, the `XMLInputFactory` class defines only a `setProperty` method. The XML Catalog API features including `XMLConstants.USE_CATALOG` are all set through this `setProperty` method. For example, to disable `USE_CATALOG` on a `XMLStreamReader` object, you can do the following:

```
factory.setProperty(XMLConstants.USE_CATALOG, false);
```

Use Catalog with Schema Validation

To use a catalog to resolve any external resources in a schema, such as XSD `import` and `include`, set the catalog on the `SchemaFactory` object:

```
SchemaFactory factory =
    SchemaFactory.newInstance(XMLConstants.W3C_XML_SCHEMA_NS_URI);
factory.setProperty(CatalogFeatures.Feature.FILES.getPropertyName(), catalog);
Schema schema = factory.newSchema(schemaFile);
```

The [XMLSchema schema document](#) contains references to external DTD:

```
<!DOCTYPE xs:schema PUBLIC "-//W3C//DTD XMLSCHEMA 200102//EN" "path/to/
XMLSchema.dtd" [
    ...
]>
```

And to xsd import:

```
<xs:import
    namespace="http://www.w3.org/XML/1998/namespace"
    schemaLocation="http://www.w3.org/2001/path/to/xml.xsd">
    <xs:annotation>
        <xs:documentation>
            Get access to the xml: attribute groups for xml:lang
            as declared on 'schema' and 'documentation' below
        </xs:documentation>
    </xs:annotation>
</xs:import>
```

Following along with this example, to use local resources to improve your application performance by reducing calls to the W3C server:

- Include these entries in the catalog set on the `SchemaFactory` object:

```
<public publicId="-//W3C//DTD XMLSCHEMA 200102//EN" uri="XMLSchema.dtd"/>
<!-- XMLSchema.dtd refers to datatypes.dtd --&gt;
&lt;systemSuffix systemIdSuffix="datatypes.dtd" uri="datatypes.dtd"/&gt;
&lt;uri name="http://www.w3.org/2001/path/to/xml.xsd" uri="xml.xsd"/&gt;</pre>
```

- Download the source files `XMLSchema.dtd`, `datatypes.dtd`, and `xml.xsd` and save them along with the catalog file.

As already discussed, the XML Catalog API lets you use any of the entry types that you prefer. In the prior case, instead of the `uri` entry, you could also use either one of the following:

- A `public` entry, because the `namespace` attribute in the `import` element is treated as the `publicId` element:

```
<public publicId="http://www.w3.org/XML/1998/namespace" uri="xml.xsd"/>
```

- A `system` entry:

```
<system systemId="http://www.w3.org/2001/path/to/xml.xsd" uri="xml.xsd"/>
```

Note

When experimenting with the XML Catalog API, it might be useful to ensure that none of the URIs or system IDs used in your sample files points to any actual resources on the internet, and especially not to the W3C server. This lets you catch mistakes early should the catalog resolution fail, and avoids putting a burden on W3C servers, thus freeing them from any unnecessary connections. All the examples in this topic and other related topics about the XML Catalog API, have an arbitrary string "path/to" added to any URI for that purpose, so that no URI could possibly resolve to an external W3C resource.

To use the catalog to resolve any external resources in an XML source to be validated, set the `catalog` on the `Validator` object:

```
SchemaFactory schemaFactory =
  SchemaFactory.newInstance(XMLConstants.W3C_XML_SCHEMA_NS_URI);
Schema schema = schemaFactory.newSchema();
Validator validator = schema.newValidator();
validator.setProperty(CatalogFeatures.Feature.FILES.getPropertyName(),
catalog);
StreamSource source = new StreamSource(new File(xml));
validator.validate(source);
```

Use Catalog with Transform

To use the XML Catalog API in a XSLT transform process, set the `catalog` file on the `TransformerFactory` object.

```
TransformerFactory factory = TransformerFactory.newInstance();
factory.setAttribute(CatalogFeatures.Feature.FILES.getPropertyName(),
catalog);
Transformer transformer = factory.newTransformer(xslSource);
```

If the XSL source that the factory is using to create the `Transformer` object contains DTD, import, and include statements similar to these:

```
<!DOCTYPE HTML>
<xsl:import href="path/to/XSLImport_html.xsl"/>
<xsl:include href="path/to/XSLInclude_header.xsl"/>
```

Then the following catalog entries can be used to resolve these references:

```
<system
  systemId="http://openjdk.java.net/xml/catalog/dtd/XSLDTD.dtd"
  uri="XSLDTD.dtd"/>
<uri name="path/to/XSLImport_html.xsl" uri="XSLImport_html.xsl"/>
<uri name="path/to/XSLInclude_header.xsl" uri="XSLInclude_header.xsl"/>
```

Calling Order for Resolvers

The JDK XML processors call a custom resolver before the catalog resolver.

Custom Resolver Preferred to Catalog Resolver

The catalog resolver (defined by the `CatalogResolver` interface) can be used to resolve external references by the JDK XML processors to which a catalog file has been set. However, if a custom resolver is also provided, then it's always be placed ahead of the catalog resolver. This means that a JDK XML processor first calls a custom resolver to attempt to resolve external resources. If the resolution is successful, then the processor skips the catalog resolver and continues. Only when there's no custom resolver or if the resolution by a custom resolver returns null, does the processor then call the catalog resolver.

For applications that use custom resolvers, it's therefore safe to set an additional catalog to resolve any resources that the custom resolvers don't handle. For existing applications, if changing the code isn't feasible, then you may set a catalog through the `system` property or `jaxp.properties` file to redirect external references to local resources knowing that such a setting won't interfere with existing processes that are handled by custom resolvers.

Detecting Errors

Detect configuration issues by isolating the problem.

The XML Catalogs Standard requires that the processors recover from any resource failures and continue, therefore the XML Catalog API ignores any failed catalog entry files without issuing an error, which makes it harder to detect configuration issues.

Detecting Configuration Issues

To detect configuration issues, isolate the issues by setting one catalog at a time, setting the `RESOLVE` value to `strict`, and checking for a `CatalogException` exception when no match is found.

Table 4-1 RESOLVE Settings

RESOLVE Value	CatalogResolver Behavior	Description
strict (default)	Throws a <code>CatalogException</code> if no match is found with a specified reference	An unmatched reference may indicate a possible error in the catalog or in setting the catalog.
continue	Returns quietly	This is useful in a production environment where you want the XML processors to continue resolving any external references not covered by the catalog.

Table 4-1 (Cont.) RESOLVE Settings

RESOLVE Value	CatalogResolver Behavior	Description
ignore	Returns quietly	For processors such as SAX, that allow skipping the external references, the ignore value instructs the CatalogResolver object to return an empty InputSource object, thus skipping the external reference.

Creating Unmodifiable Lists, Sets, and Maps

Convenience static factory methods on the `List`, `Set`, and `Map` interfaces let you easily create unmodifiable lists, sets, and maps.

A collection is considered *unmodifiable* if elements cannot be added, removed, or replaced. After you create an unmodifiable instance of a collection, it holds the same data as long as a reference to it exists.

A collection that is modifiable must maintain bookkeeping data to support future modifications. This adds overhead to the data that is stored in the modifiable collection. A collection that is unmodifiable does not need this extra bookkeeping data. Because the collection never needs to be modified, the data contained in the collection can be packed much more densely. Unmodifiable collection instances generally consume much less memory than modifiable collection instances that contain the same data.

Topics

- [Use Cases](#)
- [Syntax](#)
- [Creating Unmodifiable Copies of Collections](#)
- [Creating Unmodifiable Collections from Streams](#)
- [Randomized Iteration Order](#)
- [About Unmodifiable Collections](#)
- [Space Efficiency](#)
- [Thread Safety](#)

Use Cases

Whether to use an unmodifiable collection or a modifiable collection depends on the data in the collection.

An unmodifiable collection provides space efficiency benefits and prevents the collection from accidentally being modified, which might cause the program to work incorrectly. An unmodifiable collection is recommended for the following cases:

- Collections that are initialized from constants that are known when the program is written
- Collections that are initialized at the beginning of a program from data that is computed or is read from something such as a configuration file

For a collection that holds data that is modified throughout the course of the program, a modifiable collection is the best choice. Modifications are performed in-place, so that incremental additions or deletions of data elements are quite inexpensive. If this were done with an unmodifiable collection, a complete copy would have to be made to add or remove a single element, which usually has unacceptable overhead.

Syntax

The API for these collections is simple, especially for small numbers of elements.

Topics

- [Unmodifiable List Static Factory Methods](#)
- [Unmodifiable Set Static Factory Methods](#)
- [Unmodifiable Map Static Factory Methods](#)

Unmodifiable List Static Factory Methods

The `List.of` static factory methods provide a convenient way to create unmodifiable lists.

A list is an ordered collection in which duplicate elements are allowed. Null values are not allowed.

The syntax of these methods is:

```
List.of()
List.of(e1)
List.of(e1, e2)          // fixed-argument form overloads up to 10 elements
List.of(elements...)    // varargs form supports an arbitrary number of
elements or an array
```

Example 5-1 Examples

In JDK 8:

```
List<String> stringList = Arrays.asList("a", "b", "c");
stringList = Collections.unmodifiableList(stringList);
```

In JDK 9 and later:

```
List<String> stringList = List.of("a", "b", "c");
```

See [Unmodifiable Lists](#).

Unmodifiable Set Static Factory Methods

The `Set.of` static factory methods provide a convenient way to create unmodifiable sets.

A set is a collection that does not contain duplicate elements. If a duplicate entry is detected, then an `IllegalArgumentException` is thrown. Null values are not allowed.

The syntax of these methods is:

```
Set.of()
Set.of(e1)
Set.of(e1, e2)          // fixed-argument form overloads up to 10 elements
Set.of(elements...)    // varargs form supports an arbitrary number of
elements or an array
```

Example 5-2 Examples

In JDK 8:

```
Set<String> stringSet = new HashSet<>(Arrays.asList("a", "b", "c"));
stringSet = Collections.unmodifiableSet(stringSet);
```

In JDK 9 and later:

```
Set<String> stringSet = Set.of("a", "b", "c");
```

See [Unmodifiable Sets](#).

Unmodifiable Map Static Factory Methods

The `Map.of` and `Map.ofEntries` static factory methods provide a convenient way to create unmodifiable maps.

A `Map` cannot contain duplicate keys. If a duplicate key is detected, then an `IllegalArgumentException` is thrown. Each key is associated with one value. `Null` cannot be used for either `Map` keys or values.

The syntax of these methods is:

```
Map.of()
Map.of(k1, v1)
Map.of(k1, v1, k2, v2)      // fixed-argument form overloads up to 10 key-value
                           pairs
Map.ofEntries(entry(k1, v1), entry(k2, v2),...)
                           // varargs form supports an arbitrary number of Entry objects or an array
```

Example 5-3 Examples

In JDK 8:

```
Map<String, Integer> stringMap = new HashMap<String, Integer>();
stringMap.put("a", 1);
stringMap.put("b", 2);
stringMap.put("c", 3);
stringMap = Collections.unmodifiableMap(stringMap);
```

In JDK 9 and later:

```
Map<String, Integer> stringMap = Map.of("a", 1, "b", 2, "c", 3);
```

Example 5-4 Map with Arbitrary Number of Pairs

If you have more than 10 key-value pairs, then create the map entries using the `Map.entry` method, and pass those objects to the `Map.ofEntries` method. For example:

```
import static java.util.Map.entry;
Map <Integer, String> friendMap = Map.ofEntries(
    entry(1, "Tom"),
    entry(2, "Dick"),
```

```
entry(3, "Harry"),
...
entry(99, "Mathilde"));
```

See [Unmodifiable Maps](#).

Creating Unmodifiable Copies of Collections

Let's consider the case where you create a collection by adding elements and modifying it, and then at some point, you want an unmodifiable snapshot of that collection. Create the copy using the `copyOf` family of methods.

For example, suppose you have some code that gathers elements from several places:

```
List<Item> list = new ArrayList<>();
list.addAll(getItemsFromSomewhere());
list.addAll(getItemsFromElsewhere());
list.addAll(getItemsFromYetAnotherPlace());
```

It's inconvenient to create an unmodifiable collection using the `List.of` method. Doing this would require creating an array of the right size, copying elements from the list into the array, and then calling `List.of(array)` to create the unmodifiable snapshot. Instead, do it in one step using the `copyOf` static factory method:

```
List<Item> snapshot = List.copyOf(list);
```

There are corresponding static factory methods for `Set` and `Map` called `Set.copyOf` and `Map.copyOf`. Because the parameter of `List.copyOf` and `Set.copyOf` is `Collection`, you can create an unmodifiable `List` that contains the elements of a `Set` and an unmodifiable `Set` that contains the elements of a `List`. If you use `Set.copyOf` to create a `Set` from a `List`, and the `List` contains duplicate elements, an exception is not thrown. Instead, an arbitrary one of the duplicate elements is included in the resulting `Set`.

If the collection you want to copy is modifiable, then the `copyOf` method creates an unmodifiable collection that is a copy of the original. That is, the result contains all the same elements as the original. If elements are added to or removed from the original collection, that won't affect the copy.

If the original collection is *already* unmodifiable, then the `copyOf` method simply returns a reference to the original collection. The point of making a copy is to isolate the returned collection from changes to the original one. But if the original collection cannot be changed, there is no need to make a copy of it.

In both of these cases, if the elements are mutable, and an element is modified, that change causes both the original collection and the copy to appear to have changed.

Creating Unmodifiable Collections from Streams

The Streams library includes a set of terminal operations known as `Collectors`. A `Collector` is most often used to create a new collection that contains the elements of the stream. The `java.util.stream.Collectors` class has `Collectors` that create new unmodifiable collections from the elements of the streams.

If you want to guarantee that the returned collection is unmodifiable, you should use one of the `toUnmodifiable`- collectors. These collectors are:

```
Collectors.toUnmodifiableList()
Collectors.toUnmodifiableSet()
Collectors.toUnmodifiableMap(keyMapper, valueMapper)
Collectors.toUnmodifiableMap(keyMapper, valueMapper, mergeFunction)
```

For example, to transform the elements of a source collection and place the results into an unmodifiable set, you can do the following:

```
Set<Item> unmodifiableSet =
    sourceCollection.stream()
        .map(...)
        .collect(Collectors.toUnmodifiableSet());
```

If the stream contains duplicate elements, the `toUnmodifiableSet` collector chooses an arbitrary one of the duplicates to include in the resulting `Set`. For the `toUnmodifiableMap(keyMapper, valueMapper)` collector, if the `keyMapper` function produces duplicate keys, an `IllegalStateException` is thrown. If duplicate keys are a possibility, use the `toUnmodifiableMap(keyMapper, valueMapper, mergeFunction)` collector instead. If duplicate keys occur, the `mergeFunction` is called to merge the values of each duplicate key into a single value.

The `toUnmodifiable`- collectors are conceptually similar to their counterparts `toList`, `toSet`, and the corresponding two `toMap` methods, but they have different characteristics. Specifically, the `toList`, `toSet`, and `toMap` methods make no guarantee about the modifiability of the returned collection, however, the `toUnmodifiable`- collectors guarantee that the result is unmodifiable.

Randomized Iteration Order

Iteration order for `Set` elements and `Map` keys is randomized and likely to be different from one JVM run to the next. This is intentional and makes it easier to identify code that depends on iteration order. Inadvertent dependencies on iteration order can cause problems that are difficult to debug.

The following example shows how the iteration order is different after `jshell` is restarted.

```
jshell> var stringMap = Map.of("a", 1, "b", 2, "c", 3);
stringMap ==> {b=2, c=3, a=1}

jshell> /exit
| Goodbye

C:\Program Files\Java\jdk\bin>jshell

jshell> var stringMap = Map.of("a", 1, "b", 2, "c", 3);
stringMap ==> {a=1, b=2, c=3}
```

Randomized iteration order applies to the collection instances created by the `Set.of`, `Map.of`, and `Map.ofEntries` methods and the `toUnmodifiableSet` and `toUnmodifiableMap`

collectors. The iteration ordering of collection implementations such as `HashMap` and `HashSet` is unchanged.

About Unmodifiable Collections

The collections returned by the convenience factory methods added in JDK 9 are unmodifiable. Any attempt to add, set, or remove elements from these collections causes an `UnsupportedOperationException` to be thrown.

However, if the contained elements are mutable, then this may cause the collection to behave inconsistently or make its contents to appear to change.

Let's look at an example where an unmodifiable collection contains mutable elements. Using `jshell`, create two lists of `String` objects using the `ArrayList` class, where the second list is a copy of the first. Trivial `jshell` output was removed.

```
jshell> List<String> list1 = new ArrayList<>();
jshell> list1.add("a")
jshell> list1.add("b")
jshell> list1
list1 ==> [a, b]

jshell> List<String> list2 = new ArrayList<>(list1);
list2 ==> [a, b]
```

Next, using the `List.of` method, create `unmodlist1` and `unmodlist2` that point to the first lists. If you try to modify `unmodlist1`, then you see an exception error because `unmodlist1` is unmodifiable. Any modification attempt throws an exception.

```
jshell> List<List<String>> unmodlist1 = List.of(list1, list1);
unmodlist1 ==> [[a, b], [a, b]]

jshell> List<List<String>> unmodlist2 = List.of(list2, list2);
unmodlist2 ==> [[a, b], [a, b]]

jshell> unmodlist1.add(new ArrayList<String>())
|   java.lang.UnsupportedOperationException thrown:
|       at ImmutableCollections.ue (ImmutableCollections.java:71)
|       at ImmutableCollections$AbstractImmutableList.add
(ImmutableCollections
.java:75)
|       at (#8:1)
```

But if you modify the original `list1`, the contents of `unmodlist1` changes, even though `unmodlist1` is unmodifiable.

```
jshell> list1.add("c")
jshell> list1
list1 ==> [a, b, c]
jshell> unmodlist1
list1 ==> [[a, b, c], [a, b, c]]

jshell> unmodlist2
list2 ==> [[a, b], [a, b]]
```

```
jshell> unmodlist1.equals(unmodlist2)
$14 ==> false
```

Unmodifiable Collections vs. Unmodifiable Views

The unmodifiable collections behave in the same way as the unmodifiable views returned by the `Collections.unmodifiable...` methods. (See [Unmodifiable View Collections](#) in the Collection interface JavaDoc API documentation). However, the unmodifiable collections are not views — these are data structures implemented by classes where any attempt to modify the data causes an exception to be thrown.

If you create a `List` and pass it to the `Collections.unmodifiableList` method, then you get an unmodifiable view. The underlying list is still modifiable, and modifications to it are visible through the `List` that is returned, so it is not actually immutable.

To demonstrate this behavior, create a `List` and pass it to `Collections.unmodifiableList`. If you try to add to that `List` directly, then an exception is thrown.

```
jshell> List<String> list1 = new ArrayList<>();
jshell> list1.add("a")
jshell> list1.add("b")
jshell> list1
list1 ==> [a, b]

jshell> List<String> unmodlist1 = Collections.unmodifiableList(list1);
unmodlist1 ==> [a, b]

jshell> unmodlist1.add("c")
|   Exception java.lang.UnsupportedOperationException
|       at Collections$UnmodifiableCollection.add (Collections.java:1058)
|       at (#8:1)
```

Note that `unmodlist1` is a view of `list1`. You cannot change the view directly, but you can change the original list, which changes the view. If you change the original `list1`, no error is generated, and the `unmodlist1` list has been modified.

```
jshell> list1.add("c")
$19 ==> true
jshell> list1
list1 ==> [a, b, c]

jshell> unmodlist1
unmodlist1 ==> [a, b, c]
```

The reason for an unmodifiable view is that the collection cannot be modified by calling methods on the view. However, anyone with a reference to the underlying collection, and the ability to modify it, can cause the unmodifiable view to change.

Space Efficiency

The collections returned by the convenience factory methods are more space efficient than their modifiable equivalents.

All of the implementations of these collections are private classes hidden behind a static factory method. When it is called, the static factory method chooses the implementation class based on the size of the collection. The data may be stored in a compact field-based or array-based layout.

Let's look at the heap space consumed by two alternative implementations. First, here's an unmodifiable `HashSet` that contains two strings:

```
Set<String> set = new HashSet<>(3);    // 3 buckets
set.add("silly");
set.add("string");
set = Collections.unmodifiableSet(set);
```

The set includes six objects: the unmodifiable wrapper; the `HashSet`, which contains a `HashMap`; the table of buckets (an array); and two `Node` instances (one for each element). On a typical VM, with a 12-byte header per object, the total overhead comes to 96 bytes + 28 * 2 = 152 bytes for the set. This is a large amount of overhead compared to the amount of data stored. Plus, access to the data unavoidably requires multiple method calls and pointer dereferences.

Instead, we can implement the set using `Set.of`:

```
Set<String> set = Set.of("silly", "string");
```

Because this is a field-based implementation, the set contains one object and two fields. The overhead is 20 bytes. The new collections consume less heap space, both in terms of fixed overhead and on a per-element basis.

Not needing to support mutation also contributes to space savings. In addition, the locality of reference is improved, because there are fewer objects required to hold the data.

Thread Safety

If multiple threads share a modifiable data structure, steps must be taken to ensure that modifications made by one thread do not cause unexpected side effects for other threads. However, because an immutable object cannot be changed, it is considered thread safe without requiring any additional effort.

When several parts of a program share data structures, a modification to a structure made by one part of the program is visible to the other parts. If the other parts of the program aren't prepared for changes to the data, then bugs, crashes, or other unexpected behavior could occur. However, if different parts of a program share an immutable data structure, such unexpected behavior can never happen, because the shared structure cannot be changed.

Similarly, when multiple threads share a data structure, each thread must take precautions when modifying that data structure. Typically, threads must hold a lock while reading from or writing to any shared data structure. Failing to lock properly can lead to race conditions or inconsistencies in the data structure, which can result in bugs, crashes, or other unexpected behavior. However, if multiple threads share an immutable data structure, these problems cannot occur, even in the absence of locking. Therefore, an immutable data structure is said to be thread safe without requiring any additional effort such as adding locking code.

A collection is considered unmodifiable if elements cannot be added, removed, or replaced. However, an unmodifiable collection is only immutable if the elements contained in the collection are immutable. To be considered thread safe, collections created using the static factory methods and `toUnmodifiable`- collectors must contain only immutable elements.

Process API

The Process API lets you start, retrieve information about, and manage native operating system processes.

With this API, you can work with operating system processes as follows:

- Run arbitrary commands:
 - Filter running processes
 - Redirect output
 - Connect heterogeneous commands and shells by scheduling tasks to start when another ends
 - Clean up leftover processes
- Test the running of commands:
 - Run a series of tests
 - Log output
- Monitor commands:
 - Monitor long-running processes and restart them if they terminate
 - Collect usage statistics

Topics

- [Process API Classes and Interfaces](#)
- [Creating a Process](#)
- [Getting Information About a Process](#)
- [Redirecting Output from a Process](#)
- [Filtering Processes with Streams](#)
- [Handling Processes When They Terminate with the onExit Method](#)
- [Controlling Access to Sensitive Process Information](#)

Process API Classes and Interfaces

The Process API consists of the classes and interfaces `ProcessBuilder`, `Process`, `ProcessHandle`, and `ProcessHandle.Info`.

Topics

- [ProcessBuilder Class](#)
- [Process Class](#)
- [ProcessHandle Interface](#)
- [ProcessHandle.Info Interface](#)

ProcessBuilder Class

The `ProcessBuilder` class lets you create and start operating system processes.

See [Creating a Process](#) for examples on how to create and start a process. The `ProcessBuilder` class manages various process attributes, which the following table summarizes:

Table 6-1 ProcessBuilder Class Attributes and Related Methods

Process Attribute	Description	Related Methods
Command	Strings that specify the external program file to call and its arguments, if any.	<ul style="list-style-type: none"> • ProcessBuilder constructor • command(String... command)
Environment	The environment variables (and their values). This is initially a copy of the system environment of the current process (see the System.getenv() method).	<ul style="list-style-type: none"> • environment()
Working directory	By default, the current working directory of the current process.	<ul style="list-style-type: none"> • directory() • directory(File directory)
Standard input source	By default, a process reads standard input from a pipe; access this through the output stream returned by the Process.getOutputStream method.	<ul style="list-style-type: none"> • redirectInput(ProcessBuilder.Redirect source)
Standard output and standard error destinations	By default, a process writes standard output and standard error to pipes; access these through the input streams returned by the Process.getInputStream and Process.getErrorStream methods. See Redirecting Output from a Process for an example.	<ul style="list-style-type: none"> • redirectOutput(ProcessBuilder.Redirect destination) • redirectError(ProcessBuilder.Redirect destination)
redirectErrorStream property	Specifies whether to send standard output and error output as two separate streams (with a value of false) or merge any error output with standard output (with a value of true).	<ul style="list-style-type: none"> • redirectErrorStream() • redirectErrorStream(boolean redirectErrorStream)

Process Class

The methods in the `Process` class let you to control processes started by the methods `ProcessBuilder.start` and `Runtime.exec`. The following table summarizes these methods:

The following table summarizes the methods of the `Process` class.

Table 6-2 Process Class Methods

Method Type	Related Methods
Wait for the process to complete.	<ul style="list-style-type: none"> waitFor() waitFor(long timeout, TimeUnit unit)
Retrieve information about the process.	<ul style="list-style-type: none"> isAlive() pid() info() exitValue()
Retrieve input, output, and error streams. See Handling Processes When They Terminate with the onExit Method for an example.	<ul style="list-style-type: none"> getInputStream() getOutputStream() getErrorStream()
Retrieve direct and indirect child processes.	<ul style="list-style-type: none"> children() descendants()
Destroy or terminate the process.	<ul style="list-style-type: none"> destroy() destroyForcibly() supportsNormalTermination() onExit()
Return a CompletableFuture instance that will be completed when the process exits. See Handling Processes When They Terminate with the onExit Method for an example.	

ProcessHandle Interface

The `ProcessHandle` interface lets you identify and control native processes. The `Process` class is different from `ProcessHandle` because it lets you control processes started only by the methods `ProcessBuilder.start` and `Runtime.exec`; however, the `Process` class lets you access process input, output, and error streams.

See [Filtering Processes with Streams](#) for an example of the `ProcessHandle` interface. The following table summarizes the methods of this interface:

Table 6-3 ProcessHandle Interface Methods

Method Type	Related Methods
Retrieve all operating system processes.	<ul style="list-style-type: none"> allProcesses()
Retrieve process handle.	<ul style="list-style-type: none"> current() of(long pid) parent()
Retrieve information about the process.	<ul style="list-style-type: none"> isAlive() pid() info()
Retrieve stream of direct and indirect child processes.	<ul style="list-style-type: none"> children() descendants()
Destroy process.	<ul style="list-style-type: none"> destroy() destroyForcibly()

Table 6-3 (Cont.) ProcessHandle Interface Methods

Method Type	Related Methods
Return a CompletableFuture instance that will be completed when the process exits. See Handling Processes When They Terminate with the onExit Method for an example.	<ul style="list-style-type: none"> • onExit()

ProcessHandle.Info Interface

The `ProcessHandle.Info` interface lets you retrieve information about a process, including processes created by the `ProcessBuilder.start` method and native processes.

See [Getting Information About a Process](#) for an example of the `ProcessHandle.Info` interface. The following table summarizes the methods in this interface:

Table 6-4 ProcessHandle.Info Interface Methods

Method	Description
arguments()	Returns the arguments of the process as a String array.
command()	Returns the executable path name of the process.
commandLine()	Returns the command line of the process.
startInstant()	Returns the start time of the process.
totalCpuDuration()	Returns the process's total accumulated CPU time.
user()	Returns the user of the process.

Creating a Process

To create a process, first specify the attributes of the process, such as the command's name and its arguments, with the `ProcessBuilder` class. Then, start the process with the `ProcessBuilder.start` method, which returns a `Process` instance.

The following lines create and start a process:

```
ProcessBuilder pb = new ProcessBuilder("echo", "Hello World!");
Process p = pb.start();
```

In the following excerpt, the `setEnvTest` method sets two environment variables, `horse` and `dog`, then prints the value of these environment variables (as well as the system environment variable `HOME`) with the `echo` command:

```
public static void setEnvTest() throws IOException, InterruptedException {
    ProcessBuilder pb =
        new ProcessBuilder("/bin/sh", "-c",
"echo $horse $dog $HOME").inheritIO();
    pb.environment().put("horse", "oats");
    pb.environment().put("dog", "treats");
    pb.start().waitFor();
}
```

This method prints the following (assuming that your home directory is /home/admin):

```
oats treats /home/admin
```

Getting Information About a Process

The method `Process.pid` returns the native process ID of the process. The method `Process.info` returns a `ProcessHandle.Info` instance, which contains additional information about the process, such as its executable path name, start time, and user.

In the following excerpt, the method `getInfoTest` starts a process and then prints information about it:

```
public static void getInfoTest() throws IOException {
    ProcessBuilder pb = new ProcessBuilder("echo", "Hello World!");
    String na = "<not available>";
    Process p = pb.start();
    ProcessHandle.Info info = p.info();
    System.out.printf("Process ID: %s%n", p.pid());
    System.out.printf("Command name: %s%n", info.command().orElse(na));
    System.out.printf("Command line: %s%n",
                      info.commandLine().orElse(na));

    System.out.printf("Start time: %s%n",
                      info.startInstant().map((Instant i) -> i
                        .atZone(ZoneId.systemDefault()).toLocalDateTime().toString())
                        .orElse(na));

    System.out.printf("Arguments: %s%n",
                      info.arguments().map(
                        (String[] a) -> Stream.of(a).collect(Collectors.joining(" ")))
                        .orElse(na));

    System.out.printf("User: %s%n", info.user().orElse(na));
}
```

This method prints output similar to the following:

```
Process ID: 18761
Command name: /usr/bin/echo
Command line: echo Hello World!
Start time: 2017-05-30T18:52:15.577
Arguments: <not available>
User: administrator
```

Note

- The attributes of a process vary by operating system and are not available in all implementations. In addition, information about processes is limited by the operating system privileges of the process making the request.
- All the methods in the interface `ProcessHandle.Info` return instances of `Optional<T>`; always check if the returned value is empty.

Redirecting Output from a Process

By default, a process writes standard output and standard error to pipes. In your application, you can access these pipes through the input streams returned by the methods `Process.getOutputStream` and `Process.getErrorStream`. However, before starting the process, you can redirect standard output and standard error to other destinations, such as a file, with the methods `redirectOutput` and `redirectError`.

In the following excerpt, the method `redirectToFileTest` redirects standard input to a file, `out.tmp`, then prints this file:

```
public static void redirectToFileTest() throws IOException,  
InterruptedException {  
    File outFile = new File("out.tmp");  
    Process p = new ProcessBuilder("ls", "-la")  
        .redirectOutput(outFile)  
        .redirectError(Redirect.INHERIT)  
        .start();  
    int status = p.waitFor();  
    if (status == 0) {  
        p = new ProcessBuilder("cat", outFile.toString())  
            .inheritIO()  
            .start();  
        p.waitFor();  
    }  
}
```

The excerpt redirects standard output to the file `out.tmp`. It redirects standard error to the standard error of the invoking process; the value `Redirect.INHERIT` specifies that the subprocess I/O source or destination is the same as that of the current process. The call to the `inheritIO()` method is equivalent to `redirectInput(Redirect.INHERIT).redirectOutput(Redirect.INHERIT).redirectError(Redirect.INHERIT)`.

Filtering Processes with Streams

The method `ProcessHandle.allProcesses` returns a stream of all processes visible to the current process. You can filter the `ProcessHandle` instances of this stream the same way that you filter elements from a collection.

In the following excerpt, the method `filterProcessesTest` prints information about all the processes owned by the current user, sorted by the process ID of their parent's process:

```
public class ProcessTest {  
  
    // ...  
  
    public static void main(String[] args) {  
        ProcessTest.filterProcessesTest();  
    }  
  
    static void filterProcessesTest() {  
        Optional<String> currUser = ProcessHandle.current().info().user();  
        ProcessHandle.allProcesses()  
            .filter(p1 -> p1.info().user().equals(currUser))  
            .sorted(ProcessTest::parentComparator)  
            .forEach(ProcessTest::showProcess);  
    }  
  
    static int parentComparator(ProcessHandle p1, ProcessHandle p2) {  
        long pid1 = p1.parent().map(ph -> ph.pid()).orElse(-1L);  
        long pid2 = p2.parent().map(ph -> ph.pid()).orElse(-1L);  
        return Long.compare(pid1, pid2);  
    }  
  
    static void showProcess(ProcessHandle ph) {  
        ProcessHandle.Info info = ph.info();  
        System.out.printf("pid: %d, user: %s, cmd: %s%n",  
            ph.pid(), info.user().orElse("none"), info.command().orElse("none"));  
    }  
  
    // ...  
}
```

Note that the `allProcesses` method is limited by native operating system access controls. Also, because all processes are created and terminated asynchronously, there is no guarantee that a process in the stream is alive or that no other processes may have been created since the call to the `allProcesses` method.

Handling Processes When They Terminate with the onExit Method

The `Process.onExit` and `ProcessHandle.onExit` methods return a `CompletableFuture` instance, which you can use to schedule tasks when a process terminates. Alternatively, if you want your application to wait for a process to terminate, then you can call `onExit().get()`.

In the following excerpt, the method `startProcessesTest` creates three processes and then starts them. Afterward, it calls `onExit().thenAccept(onExitMethod)` on each of the processes; `onExitMethod` prints the process ID (PID), exit status, and output of the process.

```
public class ProcessTest {
```

```
// ...  
  
    static public void startProcessesTest() throws IOException,  
InterruptedException {  
    List<ProcessBuilder> greps = new ArrayList<>();  
    greps.add(new ProcessBuilder("/bin/sh", "-c", "grep -c \"java\" *"));  
    greps.add(new ProcessBuilder("/bin/sh", "-c", "grep -c \"Process\" *"));  
    greps.add(new ProcessBuilder("/bin/sh", "-c", "grep -c \"onExit\" *"));  
    ProcessTest.startSeveralProcesses (greps,  
ProcessTest::printGrepResults);  
    System.out.println("\nPress enter to continue ...\\n");  
    System.in.read();  
}  
  
    static void startSeveralProcesses (   
        List<ProcessBuilder> pBList,  
        Consumer<Process> onExitMethod)  
    throws InterruptedException {  
    System.out.println("Number of processes: " + pBList.size());  
    pBList.stream().forEach(  
        pb -> {  
            try {  
                Process p = pb.start();  
                System.out.printf("Start %d, %s%n",  
                    p.pid(), p.info().commandLine().orElse("<na>"));  
                p.onExit().thenAccept(onExitMethod);  
            } catch (IOException e) {  
                System.err.println("Exception caught");  
                e.printStackTrace();  
            }  
        }  
    );  
}  
  
    static void printGrepResults(Process p) {  
    System.out.printf("Exit %d, status %d%n%s%n%n",  
        p.pid(), p.exitValue(), output(p.getInputStream()));  
}  
  
    private static String output(InputStream inputStream) {  
        String s = "";  
        try (BufferedReader br = new BufferedReader(new  
InputStreamReader(inputStream))) {  
            s =  
br.lines().collect(Collectors.joining(System.getProperty("line.separator")));  
        } catch (IOException e) {  
            System.err.println("Caught IOException");  
            e.printStackTrace();  
        }  
        return s;  
    }  
  
    // ...  
}
```

The output of the method `startProcessesTest` is similar to the following. Note that the processes might exit in a different order than the order in which they were started.

```
Number of processes: 3
Start 12401, /bin/sh -c grep -c "java" *
Start 12403, /bin/sh -c grep -c "Process" *
Start 12404, /bin/sh -c grep -c "onExit" *

Press enter to continue ...

Exit 12401, status 0
ProcessTest.class:0
ProcessTest.java:16

Exit 12404, status 0
ProcessTest.class:0
ProcessTest.java:8

Exit 12403, status 0
ProcessTest.class:0
ProcessTest.java:38
```

This method calls the `System.in.read()` method to prevent the program from terminating before all the processes have exited (and have run the method specified by the `thenAccept` method).

If you want to wait for a process to terminate before proceeding with the rest of the program, then call `onExit().get()`:

```
static void startSeveralProcesses (
    List<ProcessBuilder> pBList, Consumer<Process> onExitMethod)
    throws InterruptedException {
    System.out.println("Number of processes: " + pBList.size());
    pBList.stream().forEach(
        pb -> {
            try {
                Process p = pb.start();
                System.out.printf("Start %d, %s%n",
                    p.pid(), p.info().commandLine().orElse("<na>"));
                p.onExit().get();
                printGrepResults(p);
            } catch (IOException|InterruptedException|ExecutionException e) {
                System.err.println("Exception caught");
                e.printStackTrace();
            }
        }
    );
}
```

The `ComputableFuture` class contains a variety of methods that you can call to schedule tasks when a process exits including the following:

- `thenApply`: Similar to `thenAccept`, except that it takes a lambda expression of type `Function` (a lambda expression that returns a value).

- `thenRun`: Takes a lambda expression of type `Runnable` (no formal parameters or return value).
- `thenApplyAsync`: Runs the specified `Function` with a thread from `ForkJoinPool.commonPool()`.

Because `ComputableFuture` implements the `Future` interface, this class also contains synchronous methods:

- `get(long timeout, TimeUnit unit)`: Waits, if necessary, at most the time specified by its arguments for the process to complete.
- `isDone`: Returns true if the process is completed.

Controlling Access to Sensitive Process Information

Process information may contain sensitive information such as user IDs, paths, and arguments to commands. Control access to process information with a security manager.

When running as a normal application, a `ProcessHandle` has the same operating system privileges to information about other processes as a native application; however, information about system processes may not be available.

If your application uses the `SecurityManager` class to implement a security policy, then to enable it to access process information, the security policy must grant `RuntimePermission("manageProcess")`. This permission enables native process termination and access to the process `ProcessHandle` information. Note that this permission enables code to identify and terminate processes that it did not create.

Warning

The Security Manager and APIs related to it have been deprecated and are subject to removal in a future release. There is no replacement for the Security Manager. See [JEP 411](#) for discussion and alternatives.

Preferences API

The Preferences API enables applications to manage preference and configuration data.

Applications require preference and configuration data to adapt to the needs of different users and environments. The [java.util.prefs](#) package provides a way for applications to store and retrieve user and system preference and configuration data. The data is stored persistently in an implementation-dependent backing store. There are two separate trees of preference nodes: one for user preferences and one for system preferences.

All of the methods that modify preference data are permitted to operate asynchronously. They may return immediately, and changes will eventually propagate to the persistent backing store. The [flush](#) method can be used to force changes to the backing store.

The methods in the [Preferences](#) class may be invoked concurrently by multiple threads in a single JVM without the need for external synchronization, and the results will be equivalent to some serial execution. If this class is used concurrently by multiple JVMs that store their preference data in the same backing store, the data store will not be corrupted, but no other guarantees are made concerning the consistency of the preference data.

Topics:

- [Comparing the Preferences API to Other Mechanisms](#)
- [Usage Notes](#)
- [Design FAQ](#)

Comparing the Preferences API to Other Mechanisms

Prior to the introduction of the Preferences API, developers could choose to manage preference and configuration data in a dynamic fashion by using the Properties API or the Java Naming and Directory Interface (JNDI) API.

Often, preference and configuration data was stored in properties files, accessed through the [java.util.Properties](#) API. However, there are no standards as to where such files should reside on disk, or what they should be called. Using this mechanism, it is extremely difficult to back up a user's preference data, or transfer it from one machine to another. Furthermore, as the number of applications increases, the possibility of file name conflicts increases. Also, this mechanism is of no help on platforms that lack a local disk, or where it is desirable that the data be stored in an external data store, such as an enterprise-wide LDAP directory service.

Less frequently, developers stored user preference and configuration data in a directory service accessed through the JNDI API. Unlike the Properties API, JNDI allows the use of arbitrary data stores (back-end neutrality). While JNDI is extremely powerful, it is also rather large, consisting of 5 packages and 83 classes. JNDI provides no policy as to where in the directory name space the preference data should be stored, or in which name space.

Neither Properties nor JNDI provide a simple, ubiquitous, back-end neutral preferences management facility. The Preferences API does provide such a facility, combining the simplicity of Properties with the back-end neutrality of JNDI. It provides sufficient built-in policy to prevent

name clashes, foster consistency, and encourage robustness in the face of inaccessibility of the backing data store.

Usage Notes

The information in this section is not part of the Preferences API specification. It is intended to provide some examples of how the Preferences API might be used.

Topics:

- [Obtain Preferences Objects for an Enclosing Class](#)
- [Obtain Preferences Objects for a Static Method](#)
- [Atomic Updates](#)
- [Determine Backing Store Status](#)

Obtain Preferences Objects for an Enclosing Class

The examples in this section show how you can obtain the system and user Preferences objects pertaining to the enclosing class. These examples only work inside instance methods.

The following example obtains per-user preferences. Reasonable defaults are provided for each of the preference values obtained. These defaults are returned if no preference value has been set, or if the backing store is inaccessible.

Note that static final fields, rather than inline `String` literals, are used for the key names (`NUM_ROWS` and `NUM_COLS`). This reduces the likelihood of runtime bugs from typographical errors in key names.

```
package com.greencorp.widget;
import java.util.prefs.*;

public class Gadget {
    // Preference keys for this package
    private static final String NUM_ROWS = "num_rows";
    private static final String NUM_COLS = "num_cols";

    void getPrefs() {
        Preferences prefs = Preferences.userNodeForPackage(Gadget.class);

        int numRows = prefs.getInt(NUM_ROWS, 40);
        int numCols = prefs.getInt(NUM_COLS, 80);

        ...
    }
}
```

The previous example obtains per-user preferences. If a single, per-system value is desired, replace the first line in `getPrefs` with the following:

```
Preferences prefs = Preferences.systemNodeForPackage(Gadget.class);
```

Obtain Preferences Objects for a Static Method

The examples in this section show how you can obtain the system and user Preferences objects in a static method.

In a static method (or static initializer), you need to explicitly provide the name of the package:

```
static String ourNodeName = "/com/greencorp/widget";
static void getPrefs() {
    Preferences prefs = Preferences.userRoot().node(ourNodeName);

    ...
}
```

It is always acceptable to obtain a system preferences object once, in a static initializer, and use it whenever system preferences are required:

```
static Preferences prefs = Preferences.systemRoot().node(ourNodeName);
```

In general, it is acceptable to do the same thing for a user preferences object, but not if the code in question is to be used in a server, wherein multiple users are running concurrently or serially. In such a system, `userNodeForPackage` and `userRoot` return the appropriate node for the calling user, thus it's critical that calls to `userNodeForPackage` or `userRoot` be made from the appropriate thread at the appropriate time. If a piece of code may eventually be used in such a server environment, it is a good, conservative practice to obtain user preferences objects immediately before they are used, as in the prior example.

Atomic Updates

The Preferences API does not provide database-like "transactions" wherein multiple preferences are modified atomically. Occasionally, it is necessary to modify two or more preferences as a unit.

For example, suppose you are storing the x and y coordinates where a window is to be placed. The only way to achieve atomicity is to store both values in a single preference. Many encodings are possible. Here's a simple one:

```
int x, y;
...
prefs.put(POSITION, x + "," + y);
```

When such a "compound preference" is read, it must be decoded. For robustness, allowances should be made for a corrupt (unparseable) value:

```
static int X_DEFAULT = 50, Y_DEFAULT = 25;
void parsePrefs() {
    String position = prefs.get(POSITION, X_DEFAULT + "," + Y_DEFAULT);
    int x, y;
    try {
        int i = position.indexOf(',');
        x = Integer.parseInt(coordinates.substring(0, i));
        y = Integer.parseInt(position.substring(i + 1));
    } catch(Exception e) {
```

```
        // Value was corrupt, just use defaults
        x = X_DEFAULT;
        y = Y_DEFAULT;
    }
    ...
}
```

Determine Backing Store Status

Typical application code has no need to know whether the backing store is available. It should almost always be available, but if it isn't, the code should continue to execute using default values in place of preference values from the backing store.

Very rarely, some advanced program might want to vary its behavior, or simply refuse to run, if the backing store is unavailable. Following is a method that determines whether the backing store is available by attempting to modify a preference value and flush the result to the backing store.

```
private static final String BACKING_STORE_AVAIL = "BackingStoreAvail";

private static boolean backingStoreAvailable() {
    Preferences prefs = Preferences.userRoot().node("<temporary>");
    try {
        boolean oldValue = prefs.getBoolean(BACKING_STORE_AVAIL, false);
        prefs.putBoolean(BACKING_STORE_AVAIL, !oldValue);
        prefs.flush();
    } catch(BackingStoreException e) {
        return false;
    }
    return true;
}
```

Design FAQ

This section provides answers to frequently asked questions about the design of the Preferences API.

Topics:

- [How does this Preferences API relate to the Properties API?](#)
- [How does the Preferences API relate to JNDI?](#)
- [Why do all of the get methods require the caller to pass in a default?](#)
- [How was it decided which methods should throw BackingStoreException?](#)
- [Why doesn't this API provide stronger guarantees concerning concurrent access by multiple VMs? Similarly, why doesn't the API allow multiple Preferences updates to be combined into a single "transaction", with all or nothing semantics?](#)
- [Why does this API have case-sensitive keys and node-names, while other APIs playing in a similar space \(such as the Microsoft Windows Registry and LDAP\) do not?](#)
- [Why doesn't this API use the Java 2 Collections Framework?](#)
- [Why don't the put and remove methods return the old values?](#)

- [Why does the API permit, but not require, stored defaults?](#)
- [Why doesn't this API contain methods to read and write arbitrary serializable objects?](#)
- [Why is Preferences an abstract class rather than an interface?](#)
- [Where is the default backing store?](#)

How does this Preferences API relate to the Properties API?

It is intended to replace most common uses of Properties, rectifying many of its deficiencies, while retaining its light weight. When using Properties, the programmer must explicitly specify a path name for each properties file, but there is no standard location or naming convention. Properties files are "brittle", as they are hand-editable but easily corrupted by careless editing. Support for non-string data types in properties is non-existent. Properties cannot easily be used with a persistence mechanism other than the file system. In sum, the Properties facility does not scale.

How does the Preferences API relate to JNDI?

Like JNDI, it provides back-end neutral access to persistent key-value data. JNDI, however, is far more powerful, and correspondingly heavyweight. JNDI is appropriate for enterprise applications that need its power. The Preferences API is intended as a simple, ubiquitous, back-end neutral preferences-management facility, enabling any Java application to easily tailor its behavior to user preferences and maintain small amounts of state from run to run.

Why do all of the get methods require the caller to pass in a default?

This forces the application authors to provide reasonable default values, so that applications have a reasonable chance of running even if the repository is unavailable.

How was it decided which methods should throw BackingStoreException?

Only methods whose semantics absolutely require the ability to communicate with the backing store throw this exception. Typical applications will have no need to call these methods. As long as these methods are avoided, applications will be able to run even if the backing store is unavailable, which was an explicit design goal.

Why doesn't this API provide stronger guarantees concerning concurrent access by multiple VMs? Similarly, why doesn't the API allow multiple Preferences updates to be combined into a single "transaction", with all or nothing semantics?

While the API does provide rudimentary persistent data storage, it is not intended as a substitute for a database. It is critical that it be possible to implement this API atop standard preference/configuration repositories, most of which do not provide database-like guarantees and functionality. Such repositories have proven adequate for the purposes for which this API is intended.

Why does this API have case-sensitive keys and node-names, while other APIs playing in a similar space (such as the Microsoft Windows Registry and LDAP) do not?

In the Java programming universe, case-sensitive String keys are ubiquitous. In particular, they are provided by the Properties class, which this API is intended to replace. It is not uncommon for people to use Properties in a fashion that demands case-sensitivity. For example, Java package names (which are case-sensitive) are sometimes used as keys. It is recognized that this design decision complicates the life of the systems programmer who implements Preferences atop a backing store with case-insensitive keys, but this is considered an acceptable price to pay, as far more programmers will use the Preferences API than will implement it.

Why doesn't this API use the Java 2 Collections Framework?

This API is designed for a very particular purpose, and is optimized for that purpose. In the absence of generic types (see JSR-14), the API would be less convenient for typical users. It would lack compile-time type safety, if forced to conform to the Map API. Also, it is not anticipated that interoperability with other Map implementations will be required (though it would be straightforward to implement an adapter class if this assumption turned out to be wrong). The Preferences API is, by design, so similar to Map that programmers familiar with the latter should have no difficulties using the former.

Why don't the put and remove methods return the old values?

It is desirable that both of these methods be executable even if the backing store is unavailable. This would not be possible if they were required to return the old value. Further, it would have negative performance impact if the API were implemented atop some common back-end data stores.

Why does the API permit, but not require, stored defaults?

This functionality is required in enterprise settings for scalable, cost-effective administration of preferences across the enterprise, but would be overkill in a self-administered single-user setting.

Why doesn't this API contain methods to read and write arbitrary serializable objects?

Serialized objects are somewhat fragile: if the version of the program that reads such a property differs from the version that wrote it, the object may not deserialize properly (or at all). It is not impossible to store serialized objects using this API, but we do not encourage it, and have not provided a convenience method.

Why is Preferences an abstract class rather than an interface?

It was decided that the ability to add new methods in an upward compatible fashion outweighed the disadvantage that Preferences cannot be used as a "mixin". That is to say, arbitrary classes cannot also be made to serve as Preferences objects. Also, prior to JDK 8, this obviated the need for a separate class for the static methods; in releases prior to JDK 8, interfaces cannot contain static methods.

Where is the default backing store?

System and user preference data is stored persistently in an implementation-dependent backing store. Typical implementations include flat files, OS-specific registries, directory servers and SQL databases. For example, on Windows systems the data is stored in the Windows registry.

On Linux systems, the system preferences are typically stored at `java-home/.systemPrefs` in a network installation, or `/etc/.java/.systemPrefs` in a local installation. If both are present, `/etc/.java/.systemPrefs` takes precedence. The system preferences location can be overridden by setting the system property `java.util.prefs.systemRoot`. The user preferences are typically stored at `user-home/.java/.userPrefs`. The user preferences location can be overridden by setting the system property `java.util.prefs.userRoot`.

Java Logging Overview

The Java Logging APIs, contained in the package [java.util.logging](#), facilitate software servicing and maintenance at customer sites by producing log reports suitable for analysis by end users, system administrators, field service engineers, and software development teams. The Logging APIs capture information such as security failures, configuration errors, performance bottlenecks, and/or bugs in the application or platform.

The core package includes support for delivering plain text or XML-formatted log records to memory, output streams, consoles, files, and sockets. In addition, the logging APIs are capable of interacting with logging services that already exist on the host operating system.

Topics


- [Overview of Control Flow](#)
- [Log Levels](#)
- [Loggers](#)
- [Logging Methods](#)
- [Handlers](#)
- [Formatters](#)
- [The LogManager](#)
- [Configuration File](#)
- [Default Configuration](#)
- [Dynamic Configuration Updates](#)
- [Native Methods](#)
- [XML DTD](#)
- [Unique Message IDs](#)
- [Security](#)
- [Configuration Management](#)
- [Packaging](#)
- [Localization](#)
- [Remote Access and Serialization](#)
- [Java Logging Examples](#)
- [Appendix A: DTD for XMLFormatter Output](#)

Overview of Control Flow

Applications make logging calls on `Logger` objects. `Logger` objects are organized in a hierarchical namespace and child `Logger` objects may inherit some logging properties from their parents in the namespace.

These `Logger` objects allocate `LogRecord` objects which are passed to `Handler` objects for publication. Both `Logger` and `Handler` objects may use logging `Level` objects and (optionally) `Filter` objects to decide if they are interested in a particular `LogRecord` object. When it is necessary to publish a `LogRecord` object externally, a `Handler` object can (optionally) use a `Formatter` object to localize and format the message before publishing it to an I/O stream.


Figure 8-1 Java Logging Control Flow

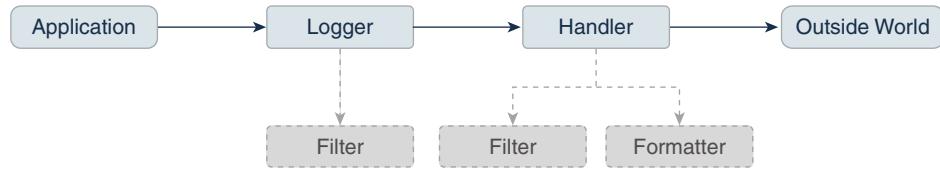

Each `Logger` object keeps track of a set of output `Handler` objects. By default all `Logger` objects also send their output to their parent `Logger`. But `Logger` objects may also be configured to ignore `Handler` objects higher up the tree.

Some `Handler` objects may direct output to other `Handler` objects. For example, the `MemoryHandler` maintains an internal ring buffer of `LogRecord` objects, and on trigger events, it publishes its `LogRecord` object through a target `Handler`. In such cases, any formatting is done by the last `Handler` in the chain.

Figure 8-2 Java Logging Control Flow with MemoryHandler

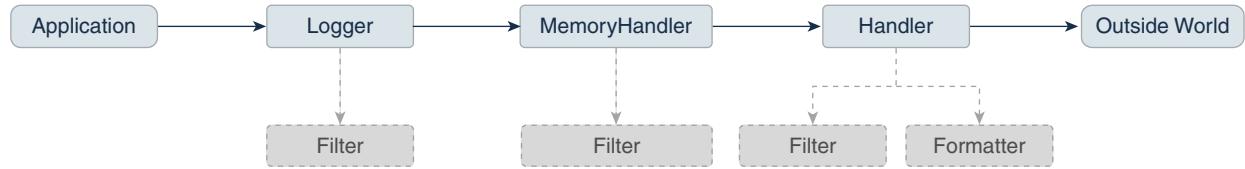

The APIs are structured so that calls on the `Logger` APIs can be cheap when logging is disabled. If logging is disabled for a given log level, then the `Logger` can make a cheap comparison test and return. If logging is enabled for a given log level, the `Logger` is still careful to minimize costs before passing the `LogRecord` to the `Handler`. In particular, localization and formatting (which are relatively expensive) are deferred until the `Handler` requests them. For example, a `MemoryHandler` can maintain a circular buffer of `LogRecord` objects without having to pay formatting costs.

Log Levels

Each log message has an associated log `Level` object. The `Level` gives a rough guide to the importance and urgency of a log message. `Log Level` objects encapsulate an integer value, with higher values indicating higher priorities.

The `Level` class defines seven standard log levels, ranging from `FINEST` (the lowest priority, with the lowest value) to `SEVERE` (the highest priority, with the highest value).

Loggers

As stated earlier, client code sends log requests to `Logger` objects. Each logger keeps track of a log level that it is interested in, and discards log requests that are below this level.

Logger objects are normally named entities, using dot-separated names such as `java.awt`. The namespace is hierarchical and is managed by the `LogManager`. The namespace should typically be aligned with the Java packaging namespace, but is not required to follow it exactly. For example, a Logger called `java.awt` might handle logging requests for classes in the `java.awt` package, but it might also handle logging for classes in `sun.awt` that support the client-visible abstractions defined in the `java.awt` package.

In addition to named `Logger` objects, it is also possible to create anonymous `Logger` objects that don't appear in the shared namespace. See the [Security](#) section.

Loggers keep track of their parent loggers in the logging namespace. A logger's parent is its nearest extant ancestor in the logging namespace. The root logger (named "") has no parent. Anonymous loggers are all given the root logger as their parent. Loggers may inherit various attributes from their parents in the logger namespace. In particular, a logger may inherit:

- **Logging level:** If a logger's level is set to be null, then the logger will use an effective `Level` that will be obtained by walking up the parent tree and using the first non-null `Level`.
- **Handlers:** By default, a `Logger` will log any output messages to its parent's handlers, and so on recursively up the tree.
- **Resource bundle names:** If a logger has a null resource bundle name, then it will inherit any resource bundle name defined for its parent, and so on recursively up the tree.

Logging Methods

The `Logger` class provides a large set of convenience methods for generating log messages. For convenience, there are methods for each logging level, corresponding to the logging level name. Thus rather than calling `logger.log(Level.WARNING, ...)`, a developer can simply call the convenience method `logger.warning(...)`.

There are two different styles of logging methods, to meet the needs of different communities of users.

First, there are methods that take an explicit source class name and source method name. These methods are intended for developers who want to be able to quickly locate the source of any given logging message. An example of this style is:

```
void warning(String sourceClass, String sourceMethod, String msg);
```

Second, there are a set of methods that do not take explicit source class or source method names. These are intended for developers who want easy-to-use logging and do not require detailed source information.

```
void warning(String msg);
```

For this second set of methods, the Logging framework will make a "best effort" to determine which class and method called into the logging framework and will add this information into the `LogRecord`. However, it is important to realize that this automatically inferred information may only be approximate. Virtual machines perform extensive optimizations when just-in-time compiling and may entirely remove stack frames, making it impossible to reliably locate the calling class and method.

Handlers

Java SE provides the following `Handler` classes:

- `StreamHandler`: A simple handler for writing formatted records to an `OutputStream`.
- `ConsoleHandler`: A simple handler for writing formatted records to `System.err`.
- `FileHandler`: A handler that writes formatted log records either to a single file, or to a set of rotating log files.
- `SocketHandler`: A handler that writes formatted log records to remote TCP ports.
- `MemoryHandler`: A handler that buffers log records in memory.

It is fairly straightforward to develop new `Handler` classes. Developers requiring specific functionality can either develop a handler from scratch or subclass one of the provided handlers.

Formatters

Java SE also includes two standard `Formatter` classes:

- `SimpleFormatter`: Writes brief "human-readable" summaries of log records.
- `XMLFormatter`: Writes detailed XML-structured information.

As with handlers, it is fairly straightforward to develop new formatters.

The LogManager

There is a global `LogManager` object that keeps track of global logging information. This includes:

- A hierarchical namespace of named `Loggers`.
- A set of logging control properties read from the configuration file. See the section [Configuration File](#).

There is a single `LogManager` object that can be retrieved using the static `LogManager.getLogManager` method. This is created during `LogManager` initialization, based on a system property. This property allows container applications (such as EJB containers) to substitute their own subclass of `LogManager` in place of the default class.

Configuration File

The logging configuration can be initialized using a logging configuration file that will be read at startup. This logging configuration file is in standard `java.util.Properties` format.

Alternatively, the logging configuration can be initialized by specifying a class that can be used for reading initialization properties. This mechanism allows configuration data to be read from arbitrary sources, such as LDAP and JDBC.

There is a small set of global configuration information. This is specified in the description of the `LogManager` class and includes a list of root-level handlers to install during startup.

The initial configuration may specify levels for particular loggers. These levels are applied to the named logger and any loggers below it in the naming hierarchy. The levels are applied in the order they are defined in the configuration file.

The initial configuration may contain arbitrary properties for use by handlers or by subsystems doing logging. By convention, these properties should use names starting with the name of the handler class or the name of the main `Logger` for the subsystem.

For example, the `MemoryHandler` uses a property `java.util.logging.MemoryHandler.size` to determine the default size for its ring buffer.

Default Configuration

The default logging configuration that ships with the JDK is only a default and can be overridden by ISVs, system administrators, and end users. This file is located at `java-home/conf/logging.properties`.

The default configuration makes only limited use of disk space. It doesn't flood the user with information, but does make sure to always capture key failure information.

The default configuration establishes a single handler on the root logger for sending output to the console.

Dynamic Configuration Updates

Programmers can update the logging configuration at run time in a variety of ways:

- `FileHandler`, `MemoryHandler`, and `ConsoleHandler` objects can all be created with various attributes.
- New `Handler` objects can be added and old ones removed.
- New `Logger` object can be created and can be supplied with specific `Handlers`.
- `Level` objects can be set on target `Handler` objects.

Native Methods

There are no native APIs for logging.

Native code that wishes to use the Java Logging mechanisms should make normal JNI calls into the Java Logging APIs.

XML DTD

The XML DTD used by the `XMLFormatter` is specified in [Appendix A: DTD for XMLFormatter Output](#).

The DTD is designed with a `<log>` element as the top-level document. Individual log records are then written as `<record>` elements.

Note that in the event of JVM crashes it may not be possible to cleanly terminate an `XMLFormatter` stream with the appropriate closing `</log>`. Therefore, tools that are analyzing log records should be prepared to cope with un-terminated streams.

Unique Message IDs

The Java Logging APIs do not provide any direct support for unique message IDs. Those applications or subsystems requiring unique message IDs should define their own conventions and include the unique IDs in the message strings as appropriate.

Security

The principal security requirement is that untrusted code should not be able to change the logging configuration. Specifically, if the logging configuration has been set up to log a particular category of information to a particular Handler, then untrusted code should not be able to prevent or disrupt that logging.

The security permission `LoggingPermission` controls updates to the logging configuration.

Trusted applications are given the appropriate `LoggingPermission` so they can call any of the logging configuration APIs. Untrusted applets are a different story. Untrusted applets can

create and use named loggers in the normal way, but they are not allowed to change logging control settings, such as adding or removing handlers, or changing log levels. However, untrusted applets are able to create and use their own "anonymous" loggers, using `Logger.getAnonymousLogger`. These anonymous loggers are not registered in the global namespace, and their methods are not access-checked, allowing even untrusted code to change their logging control settings.

The logging framework does not attempt to prevent spoofing. The sources of logging calls cannot be determined reliably, so when a `LogRecord` is published that claims to be from a particular source class and source method, it may be a fabrication. Similarly, formatters such as the `XMLFormatter` do not attempt to protect themselves against nested log messages inside message strings. Thus, a spoof `LogRecord` might contain a spoof set of XML inside its message string to make it look as if there was an additional XML record in the output.

In addition, the logging framework does not attempt to protect itself against denial of service attacks. Any given logging client can flood the logging framework with meaningless messages in an attempt to conceal some important log message.

Configuration Management

The APIs are structured so that an initial set of configuration information is read as properties from a configuration file. The configuration information may then be changed programmatically by calls on the various logging classes and objects.

In addition, there are methods on `LogManager` that allow the configuration file to be re-read. When this happens, the configuration file values will override any changes that have been made programmatically.

Packaging

All of the logging class are in the `java.*` part of the namespace, in the `java.util.logging` package.

Localization

Log messages may need to be localized.

Each logger may have a `ResourceBundle` name associated with it. The corresponding `ResourceBundle` can be used to map between raw message strings and localized message strings.

Normally, formatters perform localization. As a convenience, the `Formatter` class provides a `formatMessage` method that provides some basic localization and formatting support.

Remote Access and Serialization

As with most Java platform APIs, the logging APIs are designed for use inside a single address space. All calls are intended to be local. However, it is expected that some handlers will want to forward their output to other systems. There are a variety of ways of doing this:

Some handlers (such as the `SocketHandler`) may write data to other systems using the `XMLFormatter`. This provides a simple, standard, inter-change format that can be parsed and processed on a variety of systems.

Some handlers may wish to pass `LogRecord` objects over RMI. The `LogRecord` class is therefore serializable. However, there is a problem in how to deal with the `LogRecord` parameters. Some parameters may not be serializable and other parameters may have been designed to serialize much more state than is required for logging. To avoid these problems,

the `LogRecord` class has a custom `writeObject` method that converts the parameters to strings (using `Object.toString()`) before writing them out.

Most of the logging classes are not intended to be serializable. Both loggers and handlers are stateful classes that are tied into a specific virtual machine. In this respect they are analogous to the `java.io` classes, which are also not serializable.

Java Logging Examples

Simple Use

The following is a small program that performs logging using the default configuration.

This program relies on the root handlers that were established by the `LogManager` based on the configuration file. It creates its own `Logger` object and then makes calls to that `Logger` object to report various events.

```
package com.wombat;
import java.util.logging.*;

public class Nose {
    // Obtain a suitable logger.
    private static Logger logger = Logger.getLogger("com.wombat.nose");
    public static void main(String argv[]) {
        // Log a FINE tracing message
        logger.fine("doing stuff");
        try {
            Wombat.sneeze();
        } catch (Exception ex) {
            // Log the exception
            logger.log(Level.WARNING, "trouble sneezing", ex);
        }
        logger.fine("done");
    }
}
```

Changing the Configuration

Here's a small program that dynamically adjusts the logging configuration to send output to a specific file and to get lots of information on wombats. The pattern `%t` means the system temporary directory.

```
public static void main(String[] args) {
    Handler fh = new FileHandler("%t/wombat.log");
    Logger.getLogger("").addHandler(fh);
    Logger.getLogger("com.wombat").setLevel(Level.FINEST);
    ...
}
```

Simple Use, Ignoring Global Configuration

Here's a small program that sets up its own logging Handler and ignores the global configuration.

```
package com.wombat;

import java.util.logging.*;

public class Nose {
    private static Logger logger = Logger.getLogger("com.wombat.nose");
    private static FileHandler fh = new FileHandler("mylog.txt");
    public static void main(String argv[]) {
        // Send logger output to our FileHandler.
        logger.addHandler(fh);
        // Request that every detail gets logged.
        logger.setLevel(Level.ALL);
        // Log a simple INFO message.
        logger.info("doing stuff");
        try {
            Wombat.sneeze();
        } catch (Exception ex) {
            logger.log(Level.WARNING, "trouble sneezing", ex);
        }
        logger.fine("done");
    }
}
```

Sample XML Output

Here's a small sample of what some XMLFormatter XML output looks like:

```
<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<!DOCTYPE log SYSTEM "logger.dtd">
<log>
    <record>
        <date>2015-02-27T09:35:44.885562Z</date>
        <millis>1425029744885</millis>
        <nanos>562000</nanos>
        <sequence>1256</sequence>
        <logger>kgh.test.fred</logger>
        <level>INFO</level>
        <class>kgh.test.XMLTest</class>
        <method>writeLog</method>
        <thread>10</thread>
        <message>Hello world!</message>
    </record>
</log>
```

Appendix A: DTD for XMLFormatter Output

```
<!-- DTD used by the java.util.logging.XMLFormatter -->
<!-- This provides an XML formatted log message. -->

<!-- The document type is "log" which consists of a sequence
of record elements -->
<!ELEMENT log (record*)>

<!-- Each logging call is described by a record element. -->
<!ELEMENT record (date, millis, nanos?, sequence, logger?, level,
class?, method?, thread?, message, key?, catalog?, param*, exception?)>

<!-- Date and time when LogRecord was created in ISO 8601 format -->
<!ELEMENT date (#PCDATA)>

<!-- Time when LogRecord was created in milliseconds since
midnight January 1st, 1970, UTC. -->
<!ELEMENT millis (#PCDATA)>

<!-- Nano second adjustment to add to the time in milliseconds.
This is an optional element, added since JDK 9, which adds further
precision to the time when LogRecord was created.
-->
<!ELEMENT nanos (#PCDATA)>

<!-- Unique sequence number within source VM. -->
<!ELEMENT sequence (#PCDATA)>

<!-- Name of source Logger object. -->
<!ELEMENT logger (#PCDATA)>

<!-- Logging level, may be either one of the constant
names from java.util.logging.Level (such as "SEVERE"
or "WARNING") or an integer value such as "20". -->
<!ELEMENT level (#PCDATA)>

<!-- Fully qualified name of class that issued
logging call, e.g. "javax.marsupial.Wombat". -->
<!ELEMENT class (#PCDATA)>

<!-- Name of method that issued logging call.
It may be either an unqualified method name such as
"fred" or it may include argument type information
in parenthesis, for example "fred(int, String)". -->
<!ELEMENT method (#PCDATA)>

<!-- Integer thread ID. -->
<!ELEMENT thread (#PCDATA)>

<!-- The message element contains the text string of a log message. -->
<!ELEMENT message (#PCDATA)>
```

```
<!-- If the message string was localized, the key element provides
the original localization message key. -->
<!ELEMENT key (#PCDATA)>

<!-- If the message string was localized, the catalog element provides
the logger's localization resource bundle name. -->
<!ELEMENT catalog (#PCDATA)>

<!-- If the message string was localized, each of the param elements
provides the String value (obtained using Object.toString())
of the corresponding LogRecord parameter. -->
<!ELEMENT param (#PCDATA)>

<!-- An exception consists of an optional message string followed
by a series of StackFrames. Exception elements are used
for Java exceptions and other java Throwables. -->
<!ELEMENT exception (message?, frame+)>

<!-- A frame describes one line in a Throwable backtrace. -->
<!ELEMENT frame (class, method, line?)>

<!-- an integer line number within a class's source file. -->
<!ELEMENT line (#PCDATA)>
```

Java NIO

The Java NIO (New Input/Output) API defines [buffers](#), which are containers for data, and other structures, such as [charsets](#), [channels](#), and selectable channels. Charsets are mappings between bytes and Unicode characters. Channels represent connections to entities capable of performing I/O operations. Selectable channels are those that can be multiplexed, which means that they can process multiple I/O operations in one channel.

Java NIO Examples

The following code examples demonstrate the Java NIO API:

- [Grep NIO Example](#)
- [Checksum NIO Example](#)
- [Time Query NIO Example](#)
- [Time Server NIO Example](#)
- [Non-Blocking Time Server NIO Example](#)
- [Internet Protocol and UNIX Domain Sockets NIO Example](#)
- File NIO examples:
 - [Chmod File NIO Example](#)
 - [Copy File NIO Example](#)
 - [Disk Usage File NIO Example](#)
 - [User-Defined File Attributes File NIO Example](#)

Buffers

They are containers for a fixed amount of data of a specific primitive type. See the [java.nio](#) package and [Table 9-1](#).

Table 9-1 Buffer Classes

Buffer Class	Description
Buffer	Base class for buffer classes.
ByteBuffer	Buffer for bytes.
MappedByteBuffer	Buffer for bytes that is mapped to a file.
CharBuffer	Buffer for the char data type.
DoubleBuffer	Buffer for the double data type.
FloatBuffer	Buffer for the float data type.
IntBuffer	Buffer for the int data type.
LongBuffer	Buffer for the long data type.
ShortBuffer	Buffer for the short data type.

Charsets

They are named mappings between sequences of 16-bit Unicode characters and sequences of bytes. Support for charsets include decoders and encoders, which translate between bytes and Unicode characters. See the [java.nio.charset](#) package and [Table 9-2](#).

Table 9-2 Charset Classes

Charset Class	Description
Charset	Named mapping between characters and bytes, for example, US-ASCII and UTF-8.
CharsetDecoder	Decodes bytes into characters.
CharsetEncoder	Encodes characters into bytes.
CoderResult	Describes the result state of an decoder or encoder.
CodingErrorAction	Describes actions to take when coding errors are detected.

Channels

They represent an open connection to an entity such as a hardware device, a file, a network socket, or a program component that is capable of performing one or more distinct I/O operations, for example reading or writing. See the [java.nio.channels](#) package and [Table 9-3](#).

Table 9-3 Channel Interfaces and Classes

Channel Interface or Class	Description
Channel	Base interface for channel interfaces and classes.
ReadableByteChannel	A channel that can read bytes.
ScatteringByteChannel	A channel that can read bytes into a sequence of buffers. A <i>scattering</i> read operation reads, in a single invocation, a sequence of bytes into one or more of a given sequence of buffers.
WritableByteChannel	A channel that can write bytes.
GatheringByteChannel	A channel that can write bytes from a sequence of buffers. A <i>gathering</i> write operation writes, in a single invocation, a sequence of bytes from one or more of a given sequence of buffers.
ByteChannel	A channel that can read and write bytes. It unifies ReadableByteChannel and WritableByteChannel.
SeekableByteChannel	A byte channel that maintains a current <i>position</i> and allows the position to be changed. A seekable byte channel is connected to an entity, typically a file, that contains a variable-length sequence of bytes that can be read and written.
AsynchronousChannel	A channel that supports asynchronous I/O operations.
AsynchronousByteChannel	An asynchronous channel that can read and write bytes.
NetworkChannel	A channel to a network socket.

Table 9-3 (Cont.) Channel Interfaces and Classes

Channel Interface or Class	Description
MulticastChannel	A network channel that supports Internet Protocol (IP) multicasting. IP multicasting is the transmission of IP datagrams to members of a <i>group</i> that is zero or more hosts identified by a single destination address.
FileChannel	A channel for reading, writing, mapping, and manipulating a file. It's a <code>SeekableByteChannel</code> that is connected to a file.
SelectableChannel	A channel that can be multiplexed through a <code>Selector</code> .
	Multiplexing is the ability to process multiple I/O operations in one channel. A selectable channel can be put into blocking or non-blocking mode. In blocking mode, every I/O operation invoked upon the channel will block until it completes. In non-blocking mode, an I/O operation will never block and may transfer fewer bytes than were requested or possibly no bytes at all.
DatagramChannel	A selectable channel that can send and receive UDP (User Datagram Protocol) packets.
	You can create datagram channels with different protocol families:
	<ul style="list-style-type: none"> • Create channels for Internet Protocol sockets with the <code>INET</code> or <code>INET6</code> protocol families. These channels support network communication using TCP and UDP. Their addresses are of type <code>InetSocketAddress</code>, which encapsulates an IP address and port number. • Create channels for UNIX Domain sockets with the <code>UNIX</code> protocol family. These sockets support local interprocess communication on the same host. Their addresses are of type <code>UnixDomainSocketAddress</code>, which encapsulate a file system path name on the local system.
Pipe.SinkChannel	A channel representing the writable end of a pipe. A <code>Pipe</code> is a pair of channels: A writable sink channel and a readable source channel.
Pipe.SourceChannel	A channel representing the readable end of a pipe.
ServerSocketChannel	A selectable channel for stream-oriented listening sockets. Like datagram channels, you can create server socket channels that are for Internet Protocol sockets or Unix Domain sockets.
SocketChannel	A selectable channel for stream-oriented connecting sockets. Like datagram channels, you can create socket channels that are for Internet Protocol sockets or Unix Domain sockets.

Table 9-3 (Cont.) Channel Interfaces and Classes

Channel Interface or Class	Description
AsynchronousFileChannel	An asynchronous channel for reading, writing, and manipulating a file.
AsynchronousSocketChannel	An asynchronous channel for stream-oriented connecting sockets.
AsynchronousServerSocketChannel	An asynchronous channel for stream-oriented listening sockets.

Grep NIO Example

This example searches a list of files for lines that match a given regular expression pattern. It demonstrates NIO-mapped byte buffers, charsets, and regular expressions.

```
public class Grep {

    // Charset and decoder for ISO-8859-15
    private static Charset charset = Charset.forName("ISO-8859-15");
    private static CharsetDecoder decoder = charset.newDecoder();

    // Pattern used to parse lines
    private static Pattern linePattern = Pattern.compile(".*\r?\n");

    // The input pattern that we're looking for
    private static Pattern pattern;

    // Compile the pattern from the command line
    private static void compile(String pat) {
        try {
            pattern = Pattern.compile(pat);
        } catch (PatternSyntaxException x) {
            System.err.println(x.getMessage());
            System.exit(1);
        }
    }

    // Use the linePattern to break the given CharBuffer into lines, applying
    // the input pattern to each line to see if we have a match
    private static void grep(File f, CharBuffer cb) {
        Matcher lm = linePattern.matcher(cb); // Line matcher
        Matcher pm = null; // Pattern matcher
        int lines = 0;
        while (lm.find()) {
            lines++;
            CharSequence cs = lm.group(); // The current line
            if (pm == null)
                pm = pattern.matcher(cs);
            else
                pm.reset(cs);
            if (pm.find())
                System.out.print(f + ":" + lines + ":" + cs);
            if (lm.end() == cb.limit())
        }
    }
}
```

```
        break;
    }
}

// Search for occurrences of the input pattern in the given file
private static void grep(File f) throws IOException {

    // Open the file and then get a channel from the stream
    try (FileInputStream fis = new FileInputStream(f);
         FileChannel fc = fis.getChannel()) {

        // Get the file's size and then map it into memory
        int sz = (int) fc.size();
        MappedByteBuffer bb = fc.map(FileChannel.MapMode.READ_ONLY, 0,
                                      sz);

        // Decode the file into a char buffer
        CharBuffer cb = decoder.decode(bb);

        // Perform the search
        grep(f, cb);
    }
}

public static void main(String[] args) {
    if (args.length < 2) {
        System.err.println("Usage: java Grep pattern file...");
        return;
    }
    compile(args[0]);
    for (int i = 1; i < args.length; i++) {
        File f = new File(args[i]);
        try {
            grep(f);
        } catch (IOException x) {
            System.err.println(f + ": " + x);
        }
    }
}
```

Checksum NIO Example

This example computes 16-bit checksums for a list of files. It uses NIO-mapped byte buffers for speed.

```
public class Sum {

    // Compute a 16-bit checksum for all the remaining bytes
    // in the given byte buffer

    private static int sum(ByteBuffer bb) {
        int sum = 0;
        while (bb.hasRemaining()) {
            if ((sum & 1) != 0)
```

```
        sum = (sum >> 1) + 0x8000;
    else
        sum >>= 1;
    sum += bb.get() & 0xff;
    sum &= 0xffff;
}
return sum;
}

// Compute and print a checksum for the given file

private static void sum(File f) throws IOException {

    // Open the file and then get a channel from the stream
    try {
        FileInputStream fis = new FileInputStream(f);
        FileChannel fc = fis.getChannel() {

            // Get the file's size and then map it into memory
            int sz = (int) fc.size();
            MappedByteBuffer bb = fc.map(FileChannel.MapMode.READ_ONLY, 0,
sz);

            // Compute and print the checksum
            int sum = sum(bb);
            int kb = (sz + 1023) / 1024;
            String s = Integer.toString(sum);
            System.out.println(s + "\t" + kb + "\t" + f);
        }
    }

    public static void main(String[] args) {
        if (args.length < 1) {
            System.err.println("Usage: java Sum file...");
            return;
        }
        for (int i = 0; i < args.length; i++) {
            File f = new File(args[i]);
            try {
                sum(f);
            } catch (IOException e) {
                System.err.println(f + ": " + e);
            }
        }
    }
}
```

Time Query NIO Example

This example asks a list of hosts what time it is. It's a simple, blocking program that demonstrates NIO socket channels (connection and reading), buffer handling, charsets, and regular expressions.

```
public class TimeQuery {
```

```
// The standard daytime port
private static int DAYTIME_PORT = 13;

// The port we'll actually use
private static int port = DAYTIME_PORT;

// Charset and decoder for US-ASCII
private static Charset charset = Charset.forName("US-ASCII");
private static CharsetDecoder decoder = charset.newDecoder();

// Direct byte buffer for reading
private static ByteBuffer dbuf = ByteBuffer.allocateDirect(1024);

// Ask the given host what time it is
private static void query(String host) throws IOException {

    try (SocketChannel sc = SocketChannel.open()) {
        InetSocketAddress isa = new InetSocketAddress(
            InetAddress.getByName(host), port);

        // Connect
        sc.connect(isa);

        // Read the time from the remote host. For simplicity we assume
        // that the time comes back to us in a single packet, so that we
        // only need to read once.
        dbuf.clear();
        sc.read(dbuf);

        // Print the remote address and the received time
        dbuf.flip();
        CharBuffer cb = decoder.decode(dbuf);
        System.out.print(isa + " : " + cb);

    }
}

public static void main(String[] args) {
    if (args.length < 1) {
        System.err.println("Usage: java TimeQuery [port] host...");
        return;
    }
    int firstArg = 0;

    // If the first argument is a string of digits then we take that
    // to be the port number
    if (Pattern.matches("[0-9]+", args[0])) {
        port = Integer.parseInt(args[0]);
        firstArg = 1;
    }

    for (int i = firstArg; i < args.length; i++) {
        String host = args[i];
        try {
            query(host);
        } catch (IOException e) {
```

```
        System.err.println(host + ":" + e);
        e.printStackTrace();
    }
}
}
```

Time Server NIO Example

This example listens for connections and tells callers what time it is. Is a simple, blocking program that demonstrates NIO socket channels (accepting and writing), buffer handling, charsets, and regular expressions.

```
public class TimeServer {

    // We can't use the normal daytime port (unless we're running as root,
    // which is unlikely), so we use this one instead
    private static int PORT = 8013;

    // The port we'll actually use
    private static int port = PORT;

    // Charset and encoder for US-ASCII
    private static Charset charset = Charset.forName("US-ASCII");
    private static CharsetEncoder encoder = charset.newEncoder();

    // Direct byte buffer for writing
    private static ByteBuffer dbuf = ByteBuffer.allocateDirect(1024);

    // Open and bind the server-socket channel

    private static ServerSocketChannel setup() throws IOException {
        ServerSocketChannel ssc = ServerSocketChannel.open();
        InetSocketAddress isa = new InetSocketAddress(
            InetAddress.getLocalHost(), port);
        ssc.socket().bind(isa);
        return ssc;
    }

    // Service the next request to come in on the given channel

    private static void serve(ServerSocketChannel ssc) throws IOException {
        try (SocketChannel sc = ssc.accept()) {
            String now = new Date().toString();
            System.out.println("now: " + now);
            sc.write(encoder.encode(CharBuffer.wrap(now + "\r\n")));
            System.out.println(sc.socket().getInetAddress() + " : " + now);
        }
    }

    public static void main(String[] args) {
        if (args.length > 1) {
            System.err.println("Usage: java TimeServer [port]");
            return;
        }
    }
}
```

```
// If the first argument is a string of digits then we take that
// to be the port number
if ((args.length == 1) && Pattern.matches("[0-9]+", args[0]))
    port = Integer.parseInt(args[0]);

try {
    ServerSocketChannel ssc = setup();
    for (;;) {
        serve(ssc);
    }
} catch (IOException e) {
    e.printStackTrace();
}
}
```

Non-Blocking Time Server NIO Example

This example implements a non-blocking internet time server.

```
public class NBTimeServer {
    private static final int DEFAULT_TIME_PORT = 8900;

    // Constructor with no arguments creates a time server on default port.
    public NBTimeServer() throws Exception {
        acceptConnections(this.DEFAULT_TIME_PORT);
    }

    // Constructor with port argument creates a time server on specified port.
    public NBTimeServer(int port) throws Exception {
        acceptConnections(port);
    }

    // Accept connections for current time. Lazy Exception thrown.
    private static void acceptConnections(int port) throws Exception {
        // Selector for incoming time requests
        Selector acceptSelector = SelectorProvider.provider().openSelector();

        // Create a new server socket and set to non blocking mode
        ServerSocketChannel ssc = ServerSocketChannel.open();
        ssc.configureBlocking(false);

        // Bind the server socket to the local host and port

        InetAddress lh = InetAddress.getLocalHost();
        InetSocketAddress isa = new InetSocketAddress(lh, port);
        ssc.socket().bind(isa);

        // Register accepts on the server socket with the selector. This
        // step tells the selector that the socket wants to be put on the
        // ready list when accept operations occur, so allowing multiplexed
        // non-blocking I/O to take place.
        SelectionKey acceptKey = ssc.register(acceptSelector,
            SelectionKey.OP_ACCEPT);
```

```
int keysAdded = 0;

// Here's where everything happens. The select method will
// return when any operations registered above have occurred, the
// thread has been interrupted, etc.
while ((keysAdded = acceptSelector.select()) > 0) {
    // Someone is ready for I/O, get the ready keys
    Set<SelectionKey> readyKeys = acceptSelector.selectedKeys();
    Iterator<SelectionKey> i = readyKeys.iterator();

    // Walk through the ready keys collection and process date
    requests.
    while (i.hasNext()) {
        SelectionKey sk = (SelectionKey) i.next();
        i.remove();
        // The key indexes into the selector so you
        // can retrieve the socket that's ready for I/O
        ServerSocketChannel nextReady = (ServerSocketChannel) sk
            .channel();
        // Accept the date request and send back the date string
        Socket s = nextReady.accept().socket();
        // Write the current time to the socket
        PrintWriter out = new PrintWriter(s.getOutputStream(), true);
        Date now = new Date();
        out.println(now);
        out.close();
    }
}

// Entry point.
public static void main(String[] args) {
    // Parse command line arguments and
    // create a new time server (no arguments yet)
    try {
        NBTimeServer nbt = new NBTimeServer();
    } catch (Exception e) {
        e.printStackTrace();
    }
}
```

Internet Protocol and UNIX Domain Sockets NIO Example

This example illustrates how to intermix AF_UNIX and AF_INET/6 channels with the `SocketChannel` and `ServerSocketChannel` classes in a non-blocking client/server single-threaded application.

This example mimics some of the capabilities of the `socat` command-line utility. It can create listeners or clients and connect them to listeners and perform various different types of binding. Run this command with the `-h` option to print usage information.

Special handling is only required for the different address types at initialization. For the server side, once a listener is created and bound to an address, the code managing the selector can handle the different address families identically.

```
import java.io.IOException;
import java.io.UncheckedIOException;
import java.net.*;
import java.nio.ByteBuffer;
import java.nio.channels.*;
import java.util.HashMap;
import java.util.LinkedList;
import java.util.List;
import java.util.Map;

import jdk.net.ExtendedSocketOptions;
import jdk.net.UnixDomainPrincipal;

import static java.net.StandardProtocolFamily.UNIX;
import static java.net.StandardProtocolFamily.INET;
import static java.net.StandardProtocolFamily.INET6;

public class Socat {
    static void usage() {
        String ustring = """
usage: java Socat -s <baddr>...
        java Socat -c [-bind <baddr>] <daddr> N [delay]
        java Socat -h

-s means create one or more listening servers bound to addresses <baddr>..., then accept all incoming connections and display (counts of) received data. If more than one <baddr> is supplied, then multiple channels are created, each bound to one of the supplied addresses. All channels are non-blocking and managed by one Selector.

-c means create a client, connect it to <daddr> and send N (16 Kb) buffers. The client may optionally bind to a given address <baddr>. If a delay is specified, then the program pauses for the specified number of milliseconds between each send. After sending, the client reads until EOF and then exits.

Note: AF_UNIX client sockets do not bind to an address by default. Therefore, the remote address seen on the server side (and the client's local address) is an empty path. This is slightly different from AF_INET/6 sockets, which, if the user does not choose a local port, then a randomly chosen one is assigned.

-h means print this message and exit.

<baddr> and <daddr> are addresses specified as follows:

    UNIX:{path}
```

```
INET:{host}:port

INET6:{host}:port

{path} is the name of a socket file surrounded by curly brackets,
{}, which can be empty when binding a server signifying a randomly chosen
local
address.

{host}:port is an internet address comprising a domain name or IPv4/v6 literal
surrounded by curly brackets, {}, which can be empty when binding (signifying
any local address) and a port number, which can be zero when binding.

""";
        System.out.println(ustring);
    }

    static boolean isClient;
    static boolean initialized = false;
    static final int BUFSIZE = 8 * 1024;
    static int N;           // Number of buffers to send
    static int DELAY = 0;   // Milliseconds to delay between sends

    static List<AddressAndFamily> locals = new LinkedList<>();
    static AddressAndFamily remote;

    // family is only needed in cases where address is null.
    // It could be a Record type.

    static class AddressAndFamily {
        SocketAddress address;
        ProtocolFamily family;
        AddressAndFamily(ProtocolFamily family, SocketAddress address) {
            this.address = address;
            this.family = family;
        }
    }

    static AddressAndFamily parseAddress(String addr) throws
UnknownHostException {
        char c = addr.charAt(0);
        if (c != 'U' && c != 'I')
            throw new IllegalArgumentException("invalid address");

        String family = addr.substring(0, addr.indexOf(':')).toUpperCase();

        return switch (family) {
            case "UNIX" -> parseUnixAddress(addr);
            case "INET" -> parseInetSocketAddress(INET, addr);
            case "INET6" -> parseInetSocketAddress(INET6, addr);
            default -> throw new IllegalArgumentException();
        };
    }

    static AddressAndFamily parseUnixAddress(String token) {
        String path = getPathDomain(token);
        UnixDomainSocketAddress address;
```

```
        if (path.isEmpty())
            address = null;
        else
            address = UnixDomainSocketAddress.of(path);
        return new AddressAndFamily(UNIX, address);
    }

    static AddressAndFamily parseInetSocketAddress(StandardProtocolFamily
family, String token) throws UnknownHostException {
    String domain = getPathDomain(token);
    InetAddress address;
    if (domain.isEmpty()) {
        address = (family == StandardProtocolFamily.INET)
            ? InetAddress.getByName("0.0.0.0")
            : InetAddress.getByName(":0");
    } else {
        address = InetAddress.getByName(domain);
    }
    int cp = token.lastIndexOf':' + 1;
    int port = Integer.parseInt(token.substring(cp));
    var isa = new InetSocketAddress(address, port);
    return new AddressAndFamily(family, isa);
}

// Return the token between braces, that is, a domain name or UNIX path.

static String getPathDomain(String s) {
    int start = s.indexOf('{') + 1;
    int end = s.indexOf('}');
    if (start == -1 || end == -1 || (start > end))
        throw new IllegalArgumentException(s);
    return s.substring(start, end);
}

// Return false if the program must exit.

static void parseArgs(String[] args) throws UnknownHostException {
    if (args[0].equals("-h")) {
        usage();
    } else if (args[0].equals("-c")) {
        isClient = true;
        int nextArg;
        AddressAndFamily local = null;
        if (args[1].equals("-bind")) {
            local = parseAddress(args[2]);
            locals.add(local);
            nextArg = 3;
        } else {
            nextArg = 1;
        }
        remote = parseAddress(args[nextArg++]);
        N = Integer.parseInt(args[nextArg++]);
        if (nextArg == args.length - 1) {
            DELAY = Integer.parseInt(args[nextArg]);
        }
        initialized = true;
    }
}
```

```
        } else if (args[0].equals("-s")) {
            isClient = false;
            for (int i = 1; i < args.length; i++) {
                locals.add(parseAddress(args[i]));
            }
            initialized = true;
        } else
            throw new IllegalArgumentException();
    }

    public static void main(String[] args) throws Exception {
        try {
            parseArgs(args);
        } catch (Exception e) {
            System.out.printf("\nInvalid arguments supplied. See the
following for usage information\n");
            usage();
        }
        if (!initialized)
            return;
        if (isClient) {
            doClient();
        } else {
            doServer();
        }
    }

    static Map<SocketChannel, Integer> byteCounter = new HashMap<>();

    private static void initListener(AddressAndFamily aaf, Selector selector)
    {
        try {
            ProtocolFamily family = aaf.family;
            SocketAddress address = aaf.address;
            ServerSocketChannel server = ServerSocketChannel.open(family);
            server.bind(address);
            server.configureBlocking(false);
            postBind(address);
            server.register(selector, SelectionKey.OP_ACCEPT, null);
            System.out.println("Server: Listening on " +
server.getLocalAddress());
        } catch (IOException e) {
            throw new UncheckedIOException(e);
        }
    }

    private static void doServer() throws IOException {
        ByteBuffer readBuf = ByteBuffer.allocate(64 * 1024);
        final Selector selector = Selector.open();
        locals.forEach(localAddress -> initListener(localAddress, selector));
        int nextConnectionId = 1;
        while (true) {
            selector.select();
            var keys = selector.selectedKeys();
            for (SelectionKey key : keys) {
                try {

```

```
SelectableChannel c = key.channel();
if (c instanceof ServerSocketChannel) {
    var server = (ServerSocketChannel)c;
    var ch = server.accept();
    var userid = "";
    if (server.getLocalAddress() instanceof
        UnixDomainSocketAddress) {

        // An illustration of additional capability of
        UNIX
        // channels; it's not required behavior.

        UnixDomainPrincipal pr =
        ch.getOption(ExtendedSocketOptions.SO_PEERCREDS);
        userid = "user: " + pr.user().toString() + "
group: " +
                    pr.group().toString();
    }
    ch.configureBlocking(false);
    byteCounter.put(ch, 0);
    System.out.printf("Server: new connection\n\tfrom { %s }
\n", ch.getRemoteAddress());
    System.out.printf("\tConnection id: %s\n",
nextConnectionId);
    if (userid.length() > 0) {
        System.out.printf("\tpeer credentials: %s\n",
userid);
    }
    System.out.printf("\tConnection count: %d\n",
byteCounter.size());
    ch.register(selector, SelectionKey.OP_READ,
nextConnectionId++);
} else {
    var ch = (SocketChannel) c;
    int id = (Integer)key.attachment();
    int bytes = byteCounter.get(ch);
    readBuf.clear();
    int n = ch.read(readBuf);
    if (n < 0) {
        String remote = ch.getRemoteAddress().toString();
        System.out.printf("Server: closing
connection\n\tfrom: { %s } Id: %d\n", remote, id);
        System.out.printf("\tBytes received: %d\n",
bytes);
        byteCounter.remove(ch);
        ch.close();
    } else {
        readBuf.flip();
        bytes += n;
        byteCounter.put(ch, bytes);
        display(ch, readBuf, id);
    }
}
} catch (IOException e) {
    throw new UncheckedIOException(e);
}
```

```
        };
        keys.clear();
    }
}

private static void postBind(SocketAddress address) {
    if (address instanceof UnixDomainSocketAddress) {
        var usa = (UnixDomainSocketAddress)address;
        usa.getPath().toFile().deleteOnExit();
    }
}

private static void display(SocketChannel ch, ByteBuffer readBuf, int id)
throws IOException
{
    System.out.printf("Server: received %d bytes from: %s Id: %d\n",
        readBuf.remaining(), ch.getRemoteAddress(), id);
}

private static void doClient() throws Exception {
    SocketChannel client;
    if (locals.isEmpty())
        client = SocketChannel.open(remote.address);
    else {
        AddressAndFamily aaf = locals.get(0);
        client = SocketChannel.open(aaf.family);
        client.bind(aaf.address);
        postBind(aaf.address);
        client.connect(remote.address);
    }
    ByteBuffer sendBuf = ByteBuffer.allocate(BUFSIZE);
    for (int i=0; i<N; i++) {
        fill(sendBuf);
        client.write(sendBuf);
        Thread.sleep(DELAY);
    }
    client.shutdownOutput();
    ByteBuffer rxb = ByteBuffer.allocate(64 * 1024);
    int c;
    while ((c = client.read(rxb)) > 0) {
        rxb.flip();
        System.out.printf("Client: received %d bytes\n", rxb.remaining());
        rxb.clear();
    }
    client.close();
}

private static void fill(ByteBuffer sendBuf) {

    // Because this example is for demonstration purposes, this method
    // doesn't fill the ByteBuffer sendBuf with data. Instead, it sets the
    // limits of sendBuf to its capacity and its position to zero.
    // Consequently, when the example writes the contents of sendBuf, it
    // writes the entire contents of whatever happened to be in memory
when
    // sendBuf was allocated.
```

```
        sendBuf.limit(sendBuf.capacity());
        sendBuf.position(0);
    }
}
```

Example of Running the Socat Example

The following is an example of running the `Socat` example:

1. In a command-line shell, run `Socat` as follows:

```
$ java Socat -s UNIX:{/tmp/uds.sock}
Server: Listening on /tmp/uds.sock
```

2. In another command-line shell, run `Socat` as follows:

```
$ java Socat -c UNIX:{/tmp/uds.sock} 1
```

In the first command-line shell, you'll see output similar to the following:

```
Server: new connection
        from {}
Connection id: 1
peer credentials: user: yourusername group: yourgroup
Connection count: 1
Server: received 8192 bytes from: {} Id: 1
Server: closing connection
        from: {} Id: 1
Bytes received: 8192
```

If you don't specify a file name when you create a UNIX domain socket, then the JVM creates a socket file and automatically binds the socket to it:

```
$ java Socat -s UNIX:{}
Server: Listening on /tmp/socket_837668026
```

This is the same as calling `ServerSocketChannel.bind(null)`. You can change the default directory where the JVM saves automatically generated socket files by setting the `jdk.net.unixdomain.tmpdir` system property. See [Networking System Properties](#).

Chmod File NIO Example

This example compiles a list of one or more *symbolic mode expressions* that can change a set of file permissions in a manner similar to the UNIX `chmod` command.

The *symbolic-mode-list* parameter is a comma-separated list of expressions where each expression has the following form:

```
who operator [permissions]
```

- *who*: One or more of the following characters: `u`, `g`, `o`, or `a`, meaning owner (user), group, others, or all (owner, group, and others), respectively.

- *operator*: The character +, -, or =, signifying how to change the permissions:
 - +: Permissions are added
 - -: Permissions are removed
 - =: Permissions are assigned absolutely
- *permissions*: A sequence of zero or more of the following:
 - r: Read permission
 - w: Write permission
 - x: Execute permission

If *permissions* is omitted when permissions are assigned absolutely (with the = operator), then the permissions are cleared for the owner, group or others as identified by *who*. When *permissions* is omitted, then the operators + and - are ignored.

The following are examples of the *symbolic-mode-list* parameter:

- u=rw: Sets the owner permissions to read and write.
- ug+w: Sets the owner write and group write permissions.
- u+w,o-rwx: Sets the owner write permission and removes the others read, others write, and others execute permissions.
- o=: Sets the others permission to none (others read, others write, and others executed permissions are removed if set).

```
public class Chmod {  
  
    public static Changer compile(String exprs) {  
        // minimum is who and operator (u= for example)  
        if (exprs.length() < 2)  
            throw new IllegalArgumentException("Invalid mode");  
  
        // permissions that the changer will add or remove  
        final Set<PosixFilePermission> toAdd = new  
        HashSet<PosixFilePermission>();  
        final Set<PosixFilePermission> toRemove = new  
        HashSet<PosixFilePermission>();  
  
        // iterate over each of expression modes  
        for (String expr: exprs.split(",")) {  
            // minimum of who and operator  
            if (expr.length() < 2)  
                throw new IllegalArgumentException("Invalid mode");  
  
            int pos = 0;  
  
            // who  
            boolean u = false;  
            boolean g = false;  
            boolean o = false;  
            boolean done = false;  
            for (;;) {  
                switch (expr.charAt(pos)) {  
                    case 'u' : u = true; break;  
                    case 'g' : g = true; break;  
                    case 'o' : o = true; break;  
                    case '=' :  
                    case '+' :  
                    case '-' :  
                        if (done)  
                            throw new IllegalArgumentException("Invalid mode");  
                        done = true;  
                        if (u && g && o)  
                            break;  
                        if (u && g)  
                            toAdd.add(PosixFilePermission.of(0660));  
                        else if (u && o)  
                            toAdd.add(PosixFilePermission.of(0770));  
                        else if (g && o)  
                            toAdd.add(PosixFilePermission.of(0662));  
                        else if (u)  
                            toAdd.add(PosixFilePermission.of(0600));  
                        else if (g)  
                            toAdd.add(PosixFilePermission.of(0602));  
                        else if (o)  
                            toAdd.add(PosixFilePermission.of(0604));  
                        else if (u && g && o)  
                            toRemove.add(PosixFilePermission.of(0660));  
                        else if (u && g)  
                            toRemove.add(PosixFilePermission.of(0770));  
                        else if (u && o)  
                            toRemove.add(PosixFilePermission.of(0662));  
                        else if (g && o)  
                            toRemove.add(PosixFilePermission.of(0664));  
                        else if (u)  
                            toRemove.add(PosixFilePermission.of(0600));  
                        else if (g)  
                            toRemove.add(PosixFilePermission.of(0602));  
                        else if (o)  
                            toRemove.add(PosixFilePermission.of(0604));  
                }  
                pos++;  
            }  
        }  
    }  
}
```

```
        case 'o' : o = true; break;
        case 'a' : u = true; g = true; o = true; break;
        default : done = true;
    }
    if (done)
        break;
    pos++;
}
if (!u && !g && !o)
    throw new IllegalArgumentException("Invalid mode");

// get operator and permissions
char op = expr.charAt(pos++);
String mask = (expr.length() == pos) ? "" : expr.substring(pos);

// operator
boolean add = (op == '+');
boolean remove = (op == '-');
boolean assign = (op == '=');
if (!add && !remove && !assign)
    throw new IllegalArgumentException("Invalid mode");

// who= means remove all
if (assign && mask.length() == 0) {
    assign = false;
    remove = true;
    mask = "rwx";
}

// permissions
boolean r = false;
boolean w = false;
boolean x = false;
for (int i=0; i<mask.length(); i++) {
    switch (mask.charAt(i)) {
        case 'r' : r = true; break;
        case 'w' : w = true; break;
        case 'x' : x = true; break;
        default:
            throw new IllegalArgumentException("Invalid mode");
    }
}

// update permissions set
if (add) {
    if (u) {
        if (r) toAdd.add(OWNER_READ);
        if (w) toAdd.add(OWNER_WRITE);
        if (x) toAdd.add(OWNER_EXECUTE);
    }
    if (g) {
        if (r) toAdd.add(GROUP_READ);
        if (w) toAdd.add(GROUP_WRITE);
        if (x) toAdd.add(GROUP_EXECUTE);
    }
    if (o) {
```

```
        if (r) toAdd.add(OTHERS_READ);
        if (w) toAdd.add(OTHERS_WRITE);
        if (x) toAdd.add(OTHERS_EXECUTE);
    }
}
if (remove) {
    if (u) {
        if (r) toRemove.add(OWNER_READ);
        if (w) toRemove.add(OWNER_WRITE);
        if (x) toRemove.add(OWNER_EXECUTE);
    }
    if (g) {
        if (r) toRemove.add(GROUP_READ);
        if (w) toRemove.add(GROUP_WRITE);
        if (x) toRemove.add(GROUP_EXECUTE);
    }
    if (o) {
        if (r) toRemove.add(OTHERS_READ);
        if (w) toRemove.add(OTHERS_WRITE);
        if (x) toRemove.add(OTHERS_EXECUTE);
    }
}
if (assign) {
    if (u) {
        if (r) toAdd.add(OWNER_READ);
        else toRemove.add(OWNER_READ);
        if (w) toAdd.add(OWNER_WRITE);
        else toRemove.add(OWNER_WRITE);
        if (x) toAdd.add(OWNER_EXECUTE);
        else toRemove.add(OWNER_EXECUTE);
    }
    if (g) {
        if (r) toAdd.add(GROUP_READ);
        else toRemove.add(GROUP_READ);
        if (w) toAdd.add(GROUP_WRITE);
        else toRemove.add(GROUP_WRITE);
        if (x) toAdd.add(GROUP_EXECUTE);
        else toRemove.add(GROUP_EXECUTE);
    }
    if (o) {
        if (r) toAdd.add(OTHERS_READ);
        else toRemove.add(OTHERS_READ);
        if (w) toAdd.add(OTHERS_WRITE);
        else toRemove.add(OTHERS_WRITE);
        if (x) toAdd.add(OTHERS_EXECUTE);
        else toRemove.add(OTHERS_EXECUTE);
    }
}
}

// return changer
return new Changer() {
    @Override
    public Set<PosixFilePermission> change(Set<PosixFilePermission>
perms) {
        perms.addAll(toAdd);
    }
}
```

```
        perms.removeAll(toRemove);
        return perms;
    }
}

/**
 * A task that <i>changes</i> a set of {@link PosixFilePermission} elements.
 */
public interface Changer {
    /**
     * Applies the changes to the given set of permissions.
     *
     * @param perms
     *         The set of permissions to change
     *
     * @return The {@code perms} parameter
     */
    Set<PosixFilePermission> change(Set<PosixFilePermission> perms);
}

/**
 * Changes the permissions of the file using the given Changer.
 */
static void chmod(Path file, Changer changer) {
    try {
        Set<PosixFilePermission> perms = Files
            .getPosixFilePermissions(file);
        Files.setPosixFilePermissions(file, changer.change(perms));
    } catch (IOException x) {
        System.err.println(x);
    }
}

/**
 * Changes the permission of each file and directory visited
 */
static class TreeVisitor implements FileVisitor<Path> {
    private final Changer changer;

    TreeVisitor(Changer changer) {
        this.changer = changer;
    }

    @Override
    public FileVisitResult preVisitDirectory(Path dir,
        BasicFileAttributes attrs) {
        chmod(dir, changer);
        return CONTINUE;
    }

    @Override
    public FileVisitResult visitFile(Path file, BasicFileAttributes
        attrs) {
        chmod(file, changer);
    }
}
```

```
        return CONTINUE;
    }

    @Override
    public FileVisitResult postVisitDirectory(Path dir, IOException exc) {
        if (exc != null)
            System.err.println("WARNING: " + exc);
        return CONTINUE;
    }

    @Override
    public FileVisitResult visitFileFailed(Path file, IOException exc) {
        System.err.println("WARNING: " + exc);
        return CONTINUE;
    }
}

static void usage() {
    System.err.println("java Chmod [-R] symbolic-mode-list file...");
    System.exit(-1);
}

public static void main(String[] args) throws IOException {
    if (args.length < 2)
        usage();
    int argi = 0;
    int maxDepth = 0;
    if (args[argi].equals("-R")) {
        if (args.length < 3)
            usage();
        argi++;
        maxDepth = Integer.MAX_VALUE;
    }

    // compile the symbolic mode expressions
    Changer changer = compile(args[argi++]);
    TreeVisitor visitor = new TreeVisitor(changer);

    Set<FileVisitOption> opts = Collections.emptySet();
    while (argi < args.length) {
        Path file = Paths.get(args[argi]);
        Files.walkFileTree(file, opts, maxDepth, visitor);
        argi++;
    }
}
}
```

Copy File NIO Example

This example copies files in a similar manner to the `copy` command.

```
public class Copy {

    /**
     * Returns {@code true} if okay to overwrite a file ("cp -i")
```

```
/*
 * static boolean okayToOverwrite(Path file) {
 *     String answer = System.console().readLine("overwrite %s (yes/no)? ", file);
 *     return (answer.equalsIgnoreCase("Y") || answer.equalsIgnoreCase("yes"));
 * }
 */
/***
 * Copy source file to target location. If {@code prompt} is true then
 * prompt user to overwrite target if it exists. The {@code preserve}
 * parameter determines if file attributes should be copied/preserved.
 */
static void copyFile(Path source, Path target, boolean prompt, boolean preserve) {
    CopyOption[] options = (preserve) ?
        new CopyOption[] { COPY_ATTRIBUTES, REPLACE_EXISTING } :
        new CopyOption[] { REPLACE_EXISTING };
    if (!prompt || Files.notExists(target) || okayToOverwrite(target)) {
        try {
            Files.copy(source, target, options);
        } catch (IOException x) {
            System.err.format("Unable to copy: %s: %s%n", source, x);
        }
    }
}

/**
 * A {@code FileVisitor} that copies a file-tree ("cp -r")
 */
static class TreeCopier implements FileVisitor<Path> {
    private final Path source;
    private final Path target;
    private final boolean prompt;
    private final boolean preserve;

    TreeCopier(Path source, Path target, boolean prompt, boolean preserve) {
        this.source = source;
        this.target = target;
        this.prompt = prompt;
        this.preserve = preserve;
    }

    @Override
    public FileVisitResult preVisitDirectory(Path dir,
    BasicFileAttributes attrs) {
        // before visiting entries in a directory we copy the directory
        // (okay if directory already exists).
        CopyOption[] options = (preserve) ?
            new CopyOption[] { COPY_ATTRIBUTES } : new CopyOption[0];

        Path newdir = target.resolve(source.relativize(dir));
        try {
            Files.copy(dir, newdir, options);
        } catch (FileAlreadyExistsException x) {

```

```
        // ignore
    } catch (IOException x) {
        System.err.format("Unable to create: %s: %s%n", newdir, x);
        return SKIP_SUBTREE;
    }
    return CONTINUE;
}

@Override
public FileVisitResult visitFile(Path file, BasicFileAttributes
attrs) {
    copyFile(file, target.resolve(source.relativize(file)),
        prompt, preserve);
    return CONTINUE;
}

@Override
public FileVisitResult postVisitDirectory(Path dir, IOException exc) {
    // fix up modification time of directory when done
    if (exc == null && preserve) {
        Path newdir = target.resolve(source.relativize(dir));
        try {
            FileTime time = Files.getLastModifiedTime(dir);
            Files.setLastModifiedTime(newdir, time);
        } catch (IOException x) {
            System.err.format("Unable to copy all attributes to: %s:
%s%n", newdir, x);
        }
    }
    return CONTINUE;
}

@Override
public FileVisitResult visitFileFailed(Path file, IOException exc) {
    if (exc instanceof FileSystemLoopException) {
        System.err.println("cycle detected: " + file);
    } else {
        System.err.format("Unable to copy: %s: %s%n", file, exc);
    }
    return CONTINUE;
}
}

static void usage() {
    System.err.println("java Copy [-ip] source... target");
    System.err.println("java Copy -r [-ip] source-dir... target");
    System.exit(-1);
}

public static void main(String[] args) throws IOException {
    boolean recursive = false;
    boolean prompt = false;
    boolean preserve = false;

    // process options
    int argi = 0;
```

```
        while (argi < args.length) {
            String arg = args[argi];
            if (!arg.startsWith("-"))
                break;
            if (arg.length() < 2)
                usage();
            for (int i=1; i<arg.length(); i++) {
                char c = arg.charAt(i);
                switch (c) {
                    case 'r' : recursive = true; break;
                    case 'i' : prompt = true; break;
                    case 'p' : preserve = true; break;
                    default : usage();
                }
            }
            argi++;
        }

        // remaining arguments are the source file(s) and the target location
        int remaining = args.length - argi;
        if (remaining < 2)
            usage();
        Path[] source = new Path[remaining-1];
        int i=0;
        while (remaining > 1) {
            source[i++] = Paths.get(args[argi++]);
            remaining--;
        }
        Path target = Paths.get(args[argi]);

        // check if target is a directory
        boolean isDir = Files.isDirectory(target);

        // copy each source file/directory to target
        for (i=0; i<source.length; i++) {
            Path dest = (isDir) ? target.resolve(source[i].getFileName()) :
target;

            if (recursive) {
                // follow links when copying files
                EnumSet<FileVisitOption> opts =
EnumSet.of(FileVisitOption.FOLLOW_LINKS);
                TreeCopier tc = new TreeCopier(source[i], dest, prompt,
preserve);
                Files.walkFileTree(source[i], opts, Integer.MAX_VALUE, tc);
            } else {
                // not recursive so source must not be a directory
                if (Files.isDirectory(source[i])) {
                    System.err.format("%s: is a directory%n", source[i]);
                    continue;
                }
                copyFile(source[i], dest, prompt, preserve);
            }
        }
    }
}
```

Disk Usage File NIO Example

This example prints disk space information in a similar manner to the `df` command.

```
public class DiskUsage {  
  
    static final long K = 1024;  
  
    static void printFileStore(FileStore store) throws IOException {  
        long total = store.getTotalSpace() / K;  
        long used = (store.getTotalSpace() - store.getUnallocatedSpace()) / K;  
        long avail = store.getUsableSpace() / K;  
  
        String s = store.toString();  
        if (s.length() > 20) {  
            System.out.println(s);  
            s = "";  
        }  
        System.out.format("%-20s %12d %12d %12d\n", s, total, used, avail);  
    }  
  
    public static void main(String[] args) throws IOException {  
        System.out.format("%-20s %12s %12s %12s\n", "Filesystem", "kbytes",  
"used", "avail");  
        if (args.length == 0) {  
            FileSystem fs = FileSystems.getDefault();  
            for (FileStore store: fs.getFileStores()) {  
                printFileStore(store);  
            }  
        } else {  
            for (String file: args) {  
                FileStore store = Files.getFileStore(Paths.get(file));  
                printFileStore(store);  
            }  
        }  
    }  
}
```

User-Defined File Attributes File NIO Example

This example lists, sets, retrieves, and deletes user-defined file attributes.

```
public class Xdd {  
  
    static void usage() {  
        System.out.println("Usage: java Xdd <file>");  
        System.out.println("      java Xdd -set <name>=<value> <file>");  
        System.out.println("      java Xdd -get <name> <file>");  
        System.out.println("      java Xdd -del <name> <file>");  
        System.exit(-1);  
    }  
  
    public static void main(String[] args) throws IOException {
```

```
// one or three parameters
if (args.length != 1 && args.length != 3)
    usage();

Path file = (args.length == 1) ? Paths.get(args[0])
    : Paths.get(args[2]);

// check that user defined attributes are supported by the file store
FileStore store = Files.getFileStore(file);
if (!store
    .supportsFileAttributeView(UserDefinedFileAttributeView.class)) {
    System.err.format(
        "UserDefinedFileAttributeView not supported on %s\n", store);
    System.exit(-1);

}

UserDefinedFileAttributeView view = Files.getFileAttributeView(file,
    UserDefinedFileAttributeView.class);

// list user defined attributes
if (args.length == 1) {
    System.out.println("      Size  Name");
    System.out
        .println("----- -----");
    for (String name : view.list()) {
        System.out.format("%8d  %s\n", view.size(name), name);
    }
    return;
}

// Add/replace a file's user defined attribute
if (args[0].equals("-set")) {
    // name=value
    String[] s = args[1].split("=");
    if (s.length != 2)
        usage();
    String name = s[0];
    String value = s[1];
    view.write(name, Charset.defaultCharset().encode(value));
    return;
}

// Print out the value of a file's user defined attribute
if (args[0].equals("-get")) {
    String name = args[1];
    int size = view.size(name);
    ByteBuffer buf = ByteBuffer.allocateDirect(size);
    view.read(name, buf);
    buf.flip();

    System.out.println(Charset.defaultCharset().decode(buf).toString());
    return;
}

// Delete a file's user defined attribute
if (args[0].equals("-del")) {
```

```
        view.delete(args[1]);
        return;
    }

    // option not recognized
    usage();
}
}
```

10

Java Networking

The Java networking API provides classes for networking functionality, including addressing, classes for using URLs and URIs, socket classes for connecting to servers, networking security functionality, and more. It consists of these packages and modules:

- [java.net](#): Classes for implementing networking applications.
- [java.net.http](#): Contains the API for the HTTP Client, which provides high-level client interfaces to HTTP (versions 1.1 and 2) and low-level client interfaces to WebSocket instances. See [Java HTTP Client](#) for more information about this API, including videos and sample code.
- [javax.net](#): Classes for creating sockets.
- [javax.net.ssl](#): Secure socket classes.
- [jdk.httpserver](#): Defines the JDK-specific HTTP server API.
- [jdk.net](#): Platform-specific socket options for the `java.net` and `java.nio.channels` socket classes.

Networking System Properties

You can set the following networking system properties in one of three ways:

- Using the `-D` option of the `java` command
- Using the `System.setProperty(String, String)` method
- Specifying them in the `$JAVA_HOME/conf/net.properties` file. Note that you can specify only proxy-related properties in this file.

Unless specified otherwise, a property value is checked every time it's used.

See [Networking Properties](#) and the [java.net.http](#) and [jdk.httpserver](#) modules in the Java SE API Specification for more information.

HTTP Client Properties

Some of the following properties are subject to predefined minimum and maximum values that override any user-specified values. Note that the default value of boolean values is true if the property exists but has no value.

Table 10-1 HTTP Client Properties

Property	Default Value	Description
<code>jdk.httpclient.allowRestrictedHeaders</code>	<i>No default value</i>	A comma-separated list of normally restricted HTTP header names that users may set in HTTP requests or by user code in <code>HttpRequest</code> instances. By default, the following request headers are not allowed to be set by user code: <code>connection</code> , <code>content-length</code> , <code>expect</code> , <code>host</code> , and <code>upgrade</code> . You can override this behavior with this property. The names are case-insensitive and whitespace is ignored. Note that this property is intended for testing and not for real-world deployments. Protocol errors or other undefined behavior are likely to occur when using this property. There may be other headers that are restricted from being set depending on the context. This includes the "Authorization" header when the relevant <code>HttpClient</code> has an authenticator set. These restrictions cannot be overridden by this property.
<code>jdk.httpclient.bufsize</code>	16384 (16 kB)	The size to use for internal allocated buffers in bytes.
<code>jdk.httpclient.connectionPoolSize</code>	0	The maximum number of connections to keep in the HTTP/1.1 keep alive cache. A value of 0 means that the cache is unbounded.
<code>jdk.httpclient.connectionWindowSize</code>	2^{26}	The HTTP/2 client connection window size in bytes. The maximum size is $2^{31}-1$. This value cannot be smaller than the stream window size.
<code>jdk.httpclient.disableRetryOnConnect</code>	false	Whether automatic retry of connection failures is disabled. If false, then retries are attempted (subject to the retry limit).
<code>jdk.httpclient.enableAllMethodRetry</code>	false	Whether it is permitted to automatically retry non-idempotent HTTP requests.
<code>jdk.httpclient.enablepush</code>	1	Whether HTTP/2 push promise is enabled. A value of 1 enables push promise; a value of 0 disables it.

Table 10-1 (Cont.) HTTP Client Properties

Property	Default Value	Description
<code>jdk.httpclient.hpack.maxhederTableSize</code>	16384 (16 kB)	The HTTP/2 client maximum HPACK header table size in bytes.
<code>jdk.httpclient.HttpClient.log</code>	<i>No default value</i>	<p>Enables high-level logging of various events through the Java Logging API (which is contained in the package <code>java.util.logging</code>).</p> <p>The value contains a comma-separated list of any of the following items:</p> <ul style="list-style-type: none"> • errors • requests • headers • frames • ssl • trace • channel <p>You can append the <code>frames</code> item with a colon-separated list of any of the following items:</p> <ul style="list-style-type: none"> • control • data • window • all <p>Specifying an item adds it to the HTTP client's log. For example, if you specify the following value, then the Java Logging API logs all possible HTTP Client events:</p> <pre>errors,requests,headers,frames:control:data:window,ssl,trace,channel</pre> <p>Note that you can replace <code>control:data:window</code> with <code>all</code>.</p> <p>The name of the logger is <code>jdk.httpclient.HttpClient</code>, and all logging is at level <code>INFO</code>.</p>
<code>jdk.httpclient.keepalive.timeout</code>	1200	The number of seconds to keep idle HTTP/1.1 connections alive in the keep alive cache.
<code>jdk.httpclient.maxframeSize</code>	16384 (16 kB)	The HTTP/2 client maximum frame size in bytes. The server is not permitted to send a frame larger than this.
<code>jdk.httpclient.maxstreams</code>	100	The maximum number of HTTP/2 streams per connection.
<code>jdk.httpclient.receiveBufferSize</code>	<i>The operating system's default value</i>	The HTTP client socket receive buffer size in bytes.

Table 10-1 (Cont.) HTTP Client Properties

Property	Default Value	Description
jdk.httpclient.redirects.retryLimit	5	The maximum number of attempts to send a HTTP request when redirected or any failure occurs for any reason.
jdk.httpclient.websocket.writeBufferSize	16384 (16 kB)	The buffer size used by the web socket implementation for socket writes.
jdk.httpclient.windowSize	16777216 (16 MB)	The HTTP/2 client stream window size in bytes.

HTTP Server Properties

The following are JDK-specific system properties used by the default HTTP server implementation in the JDK. Any of these properties that take a numeric value assume the default value if given a string that does not parse as a number.

Table 10-2 HTTP Server Properties

Property	Default Value	Description
jdk.http.maxHeaderSize	393216 (384 kB)	<p>The maximum response header size that the JDK built-in implementation of the legacy URL protocol handler for HTTP, <code>java.net.HttpURLConnection</code> and the newer HTTP client, <code>java.net.http.HttpClient</code>, will accept from a remote party. This limit is computed as the cumulative size of all header names and header values plus an overhead of 32 bytes per header name-value pair.</p> <p>If this limit is exceeded, then the request fails with a protocol exception.</p> <p>If this property has a zero or negative value, then there's no limit.</p>
jdk.httpserver.maxConnections	-1	The maximum number of open connections at a time. This includes active and idle connections. If this property has a zero or negative value, then no limit is enforced.

Table 10-2 (Cont.) HTTP Server Properties

Property	Default Value	Description
<code>sun.net.httpserver.drainAmount</code>	65536	The maximum number of bytes that will be automatically read and discarded from a request body that has not been completely consumed by its <code>HttpHandler</code> . If the number of remaining unread bytes are less than this limit, then the connection will be put in the idle connection cache. If not, then it will be closed.
<code>sun.net.httpserver.idleInterval</code>	30	The maximum duration in seconds which an idle connection is kept open. This timer has an implementation-specific granularity that may mean that idle connections are closed later than the specified interval. If this property has a zero or negative value, then the default value is used.
<code>sun.net.httpserver.maxIdleConnections</code>	200	The maximum number of idle connections that may exist at the same time. If this property has a zero or negative value, then connections are closed after use.
<code>sun.net.httpserver.maxReqHeaders</code>	200	The maximum number of header fields accepted in a request. If this limit is exceeded while the headers are being read, then the connection is terminated and the request ignored. If this property has a zero or negative value, then the default value is used.
<code>sun.net.httpserver.maxReqHeaderSize</code>	393216 (384 kB)	The maximum request header size that the JDK built-in implementation of <code>com.sun.net.httpserver.HttpServer</code> will accept. This limit is computed the same way as <code>jdk.http.maxHeaderSize</code> . If the limit is exceeded, then the connection is closed. If this property has a zero or negative value, then there's no limit.

Table 10-2 (Cont.) HTTP Server Properties

Property	Default Value	Description
<code>sun.net.httpserver.maxReqT -1</code> ime		The maximum time in milliseconds allowed to receive a request headers and body. In practice, the actual time is a function of request size, network speed, and handler processing delays. If this property has a zero or negative value, then the time is not limited. If the limit is exceeded, then the connection is terminated and the handler will receive an <code>IOException</code> . This timer has an implementation-specific granularity that may mean requests are aborted later than the specified interval.
<code>sun.net.httpserver.maxRspT -1</code> ime		The maximum time in milliseconds allowed to receive a response headers and body. In practice, the actual time is a function of response size, network speed, and handler processing delays. If this property has a zero or negative value, then the time is not limited. If the limit is exceeded then the connection is terminated and the handler will receive an <code>IOException</code> . This timer has an implementation-specific granularity that may mean responses are aborted later than the specified interval.
<code>sun.net.httpserver.nodelay</code> false		A boolean value, which if true, sets the TCP_NODELAY socket option on all incoming connections.

IPv4 and IPv6 Protocol Properties

These two properties are checked only once, at startup.

Table 10-3 IPv4 and IPv6 Protocol Properties

Property	Default Value	Description
<code>java.net.preferIPv4Stack</code>	<code>false</code>	If IPv6 is available on the operating system, then the underlying native socket will be, by default, an IPv6 socket, which lets applications connect to, and accept connections from, both IPv4 and IPv6 hosts. Set this property to <code>true</code> if you want your application use IPv4-only sockets. This implies that it won't be possible for the application to communicate with IPv6-only hosts.
<code>java.net.preferIPv6Address</code>	<code>false</code>	When dealing with a host which has both IPv4 and IPv6 addresses, and if IPv6 is available on the operating system, the default behavior is to prefer using IPv4 addresses over IPv6 ones. This is to ensure backward compatibility, for example, for applications that depend on the representation of an IPv4 address (such as 192.168.1.1). Set this property to <code>true</code> to change this preference and use IPv6 addresses over IPv4 ones where possible.
		Set this property to <code>system</code> to preserve the order of the addresses as returned by the operating system.

HTTP Proxy Properties

The following proxy settings are used by the HTTP protocol handler and the default proxy selector.

Table 10-4 HTTP Proxy Properties

Property	Default Value	Description
<code>http.proxyHost</code>	<i>No default value</i>	Proxy server that the HTTP protocol handler will use.
<code>http.proxyPort</code>	80	Port that the HTTP protocol handler will use.

Table 10-4 (Cont.) HTTP Proxy Properties

Property	Default Value	Description
http.nonProxyHosts	localhost 127.* [:]1]	<p>Indicates the hosts that should be accessed without going through the proxy. Typically, this defines internal hosts. The value of this property is a list of hosts, separated by the vertical bar () character. In addition, you can use the asterisk (*) for pattern matching. For example, the following specifies that every host in the exmaple.com domain and localhost should be accessed directly even if a proxy server is specified:</p> <ul style="list-style-type: none"> – <p>Dhttp.nonProxyHosts="*.example.com localhost"</p> <p>The default value excludes all common variations of the loopback address.</p>

HTTPS Proxy Properties

HTTPS, HTTP over SSL, is a secure version of HTTP mainly used when confidentiality is needed (such as payment web sites). The following proxy settings are used by the HTTPS protocol handler and the default proxy selector.

 **Note**

The HTTPS protocol handler uses the same `http.nonProxyHosts` property as the HTTP protocol.

Table 10-5 HTTPS Proxy Properties

Property	Default Value	Description
<code>https.proxyHost</code>	<i>No default value</i>	Proxy server that the HTTPS protocol handler will use.
<code>https.proxyPort</code>	443	Port that the HTTPS protocol handler will use.

FTP Proxy Properties

The following proxy settings are used by the FTP protocol handler.

Table 10-6 FTP Proxy Properties

System Property	Default Value	Description
ftp.proxyHost	<i>No default value</i>	Proxy server that the FTP protocol handler will use.
ftp.proxyPort	80	Port that the FTP protocol handler will use.
ftp.nonProxyHosts	localhost 127.* [:1]	Similar to http.nonProxyHosts, this property indicates the hosts that should be accessed without going through the proxy. The default value excludes all common variations of the loopback address.

SOCKS Proxy Properties

The SOCKS proxy enables a lower-level type of tunneling because it works at the TCP level. Specifying a SOCKS proxy server results in all TCP connections going through that proxy server unless other proxies are specified. The following proxy settings are used by the SOCKS protocol handler.

Table 10-7 SOCKS Proxy Properties

Property	Default Value	Description
java.net.socks.username	<i>No default value</i>	See Acquiring the SOCKS User Name and Password
java.net.socks.password	<i>No default value</i>	See Acquiring the SOCKS User Name and Password
socksProxyHost	<i>No default value</i>	SOCKS proxy server that the SOCKS protocol handler will use.
socksProxyPort	1080	Port that the SOCKS protocol handler will use.
socksProxyVersion	5	The version of the SOCKS protocol supported by the server. The default is 5 indicating SOCKS V5; alternatively 4 can be specified for SOCKS V4. Setting the property to values other than these leads to unspecified behavior.

Acquiring the SOCKS User Name and Password

The SOCKS user name and password are acquired in the following way:

1. First, if the application has registered a `java.net.Authenticator` default instance, then this will be queried with the protocol set to the string `SOCKS5`, and the prompt set to the string `SOCKS` authentication.

2. If the authenticator does not return a user name/password or if no authenticator is registered, then the system checks the values of properties `java.net.socks.username` and `java.net.socks.password`.
3. If these values don't exist, then the system property `user.name` is checked for a user name. In this case, no password is supplied.

Other Proxy-Related Properties

Table 10-8 Other Proxy-Related Properties

Property	Default Value	Description
<code>java.net.useSystemProxies</code>	<code>false</code>	<p>If <code>true</code>, then the operating system's proxy settings are used. Note that the system properties that explicitly set proxies like <code>http.proxyHost</code> take precedence over the system settings even if <code>java.net.useSystemProxies</code> is set to <code>true</code>.</p> <p>This property is checked only once, at startup.</p>
<code>jdk.http.auth.tunneling.disabledSchemes</code>	<code>Basic</code>	<p>Lists the authentication schemes that will be disabled when tunneling HTTPS over a proxy with the HTTP CONNECT method.</p> <p>The value of this property is a comma-separated list of case-insensitive authentication scheme names, as defined by their relevant RFCs. Schemes include Basic, Digest, NTLM, Kerberos, and Negotiate. A scheme that is not known or supported is ignored.</p>

Table 10-8 (Cont.) Other Proxy-Related Properties

Property	Default Value	Description
jdk.http.auth.proxying.disabledSchemes	No default value	<p>Lists the authentication schemes that will be disabled when proxying HTTP.</p> <p>The value of this property is a comma-separated list of case-insensitive authentication scheme names, as defined by their relevant RFCs. Schemes include Basic, Digest, NTLM, Kerberos, and Negotiate. A scheme that is not known or supported is ignored.</p> <p>In some environments, certain authentication schemes may be undesirable when proxying HTTP or HTTPS. For example, Basic results in effectively the cleartext transmission of the user's password over the physical network.</p>

UNIX Domain Sockets Properties

Calling `ServerSocketChannel.bind` with a null address parameter will bind the channel's socket to an automatically assigned socket address. For UNIX domain sockets, this means a unique path in some predefined system temporary directory.

Use these properties to control the selection of this directory:

Table 10-9 UNIX Domain Sockets Properties

Property	Default Value	Description
<code>java.io.tmpdir</code>	Dependent on the operating system	If the temporary directory can't be determined with the <code>jdk.net.unixdomain.tmpdir</code> system property, then the directory specified by the <code>java.io.tmpdir</code> system property is used.
<code>jdk.net.unixdomain.tmpdir</code>	On some platforms, (for example, some UNIX systems) this will have a predefined default value. On others, (for example, Windows) there is no default value.	Specifies the directory to use for automatically bound server socket addresses.

On Linux and macOS, the search order to determine this directory is as follows:

1. The system property `jdk.net.unixdomain.tmpdir` (set on the command line or by `System.setProperty(String, String)`)
2. The same property set in the `$JAVA_HOME/conf/net.properties` file

3. The system property `java.io.tmpdir`

On Windows, the search order to determine this directory is as follows:

1. The system property `jdk.net.unixdomain.tmpdir` (set on the command line or by `System.setProperty(String, String)`)
2. The same property set in the `%JAVA_HOME%\conf\net.properties` file
3. The `TEMP` environment variable
4. The system property `java.io.tmpdir`

Because UNIX domain socket addresses are limited in length to approximately 100 bytes (depending on the platform), it is important to ensure that the temporary directory's name together with the file name used for the socket does not exceed this limit.

Note

If a client socket is connected to a remote destination without calling `bind` first, then the socket is implicitly bound. In this case, UNIX domain sockets are unnamed (that is, their path is empty). This behavior is not affected by any system or networking properties.

Other HTTP URL Stream Protocol Handler Properties

These properties are checked only once, at startup.

Table 10-10 Other HTTP URL Stream Protocol Handler Properties

Property	Default Value	Description
<code>http.agent</code>	<code>Java/<version></code>	Defines the string sent in the User-Agent request header in HTTP requests. Note that the string <code>Java/<version></code> will be appended to the one provided in the property. For example, if - <code>Dhttp.agent="foobar"</code> is specified, the User-Agent header will contain <code>foobar Java/1.8.0</code> if the version of the JVM is <code>1.8.0</code> .
<code>http.auth.digest.cnonceRep</code>	5	See System Properties That Modify the Behavior of HTTP Digest Authentication Mechanism .
<code>http.auth.digest.eat</code>		
<code>http.auth.digest.validateP</code>	<code>false</code>	See System Properties That Modify the Behavior of HTTP Digest Authentication Mechanism .
<code>http.auth.digest.validateS</code>	<code>false</code>	See System Properties That Modify the Behavior of HTTP Digest Authentication Mechanism .
<code>http.auth.digest.server</code>		

Table 10-10 (Cont.) Other HTTP URL Stream Protocol Handler Properties

Property	Default Value	Description
http.auth.ntlm.domain	<i>No default value</i>	<p>Similar to other HTTP authentication schemes, New Technology LAN Manager (NTLM) uses the <code>java.net.Authenticator</code> class to acquire user names and passwords when they are needed. However, NTLM also needs the NT domain name. There are three options for specifying the domain:</p> <ol style="list-style-type: none"> 1. Do not specify it. In some environments, the domain is not actually required and the application does not have to specify it. 2. The domain name can be encoded within the user name by prefixing the domain name followed by a backslash (\) before the user name. With this method, existing applications that use the <code>Authenticator</code> class do not need to be modified, as long as users are made aware that this notation must be used. 3. If a domain name is not specified as in the second option and the system property <code>http.auth.ntlm.domain</code> is defined, then the value of this property will be used as the domain name.
http.keepAlive	true	<p>Indicates if persistent (keep-alive) connections should be supported. They improve performance by allowing the underlying socket connection to be reused for multiple HTTP requests. If this is set to <code>true</code>, then persistent connections will be requested with HTTP 1.1 servers.</p> <p>Set this property to <code>false</code> to disable the use of persistent connections.</p>
http.KeepAlive.queuedConnections	10	The maximum number of keep-alive connections to be on the queue for clean up.

Table 10-10 (Cont.) Other HTTP URL Stream Protocol Handler Properties

Property	Default Value	Description
<code>http.KeepAlive.remainingData</code>	512	The maximum amount of data in kilobytes that will be cleaned off the underlying socket so that it can be reused.
<code>http.maxConnections</code>	5	If HTTP persistent connections (see the <code>http.keepAlive</code> property) are enabled, then this value determines the maximum number of idle connections that will be simultaneously kept alive per destination.
<code>jdk.http.ntlm.transparentAuth</code>	<i>No default value</i>	<p>Enables transparent New Technology LAN Manager (NTLM) HTTP authentication on Windows.</p> <p>Transparent authentication can be used for the NTLM scheme, where the security credentials based on the currently logged in user's name and password can be obtained directly from the operating system, without prompting the user.</p> <p>If this value is not set, then transparent authentication is never used.</p> <p>This property has three possible values:</p> <ul style="list-style-type: none"> • <code>disabled</code>: Transparent authentication is never used. • <code>allHosts</code>: Transparent authentication is used for all hosts • <code>trustedHosts</code>: Transparent authentication is enabled for hosts that are trusted in Windows Internet settings. <p>Note that NTLM is not a strongly secure authentication scheme; care should be taken before enabling it.</p>

System Properties That Modify the Behavior of HTTP Digest Authentication Mechanism

The system properties `http.auth.digest.validateServer` and `http.auth.digest.validateProxy` modify the behavior of the HTTP digest authentication mechanism. Digest authentication provides a limited ability for the server to authenticate itself to the client (that is, by proving that it knows the user's password). However, not all servers support this capability and by default the check is switched off. To enforce this check for authentication with an origin, set `http.auth.digest.validateServer` to `true`; with a proxy server, set `http.auth.digest.validateProxy` to `true`.

It is usually not necessary to set the system property `http.auth.digest.cnonceRepeat`. This determines how many times a cnonce value is reused. This can be useful when the MD5-sess algorithm is being used. Increasing the value reduces the computational overhead on both the client and the server by reducing the amount of material that has to be hashed for each HTTP request.

Address Cache Properties

The `java.net` package, when performing name resolution, uses an address cache for both security and performance reasons. Any address resolution attempt, be it forward (name to IP address) or reverse (IP address to name), will have its result cached, whether it was successful or not, so that subsequent identical requests will not have to access the naming service. These properties enable you to tune how the address cache operates.

Table 10-11 Address Cache Properties

Property	Default Value	Description
<code>networkaddress.cache.ttl</code>	-1	Specified in the <code>\$JAVA_HOME/conf/security/java.security</code> file to indicate the caching policy for successful name lookups from the name service. The value is an integer corresponding to the number of seconds successful name lookups will be kept in the cache. A value of -1 (or any other negative value) indicates a “cache forever” policy, while a value of 0 (zero) means no caching. The default value is -1 (forever) if a security manager is installed and implementation-specific if no security manager is installed.
<code>networkaddress.cache.negative.ttl</code>	10	Specified in the <code>\$JAVA_HOME/conf/security/java.security</code> file to indicate the caching policy for unsuccessful name lookups from the name service. The value is an integer corresponding to the number of seconds an unsuccessful name lookup will be kept in the cache. A value of -1 (or any negative value) means “cache forever,” while a value of 0 (zero) means no caching.

Enhanced Exception Messages

By default, for security reasons, exception messages do not include potentially sensitive security information such as hostnames or UNIX domain socket address paths. Use the `jdk.includeInExceptions` to relax this restriction for debugging and other purposes.

Table 10-12 Enhanced Exception Messages Property

Property	Default Value	Description
jdk.includeInExceptions	<i>No default value</i>	The value is a comma-separated list of keywords that refer to exception types whose messages may be enhanced with more detailed information. In particular, if the value includes the string <code>hostInfo</code> , then socket addresses will be included in exception message texts (for example, hostnames and UNIX domain socket address paths).

11

Pseudorandom Number Generators

Random number generators included in Java SE are more accurately called pseudorandom number generators (PRNGs). They create a series of numbers based on a deterministic algorithm.

The most important interfaces and classes are [RandomGenerator](#), which enables you to generate random numbers of various primitive types given a PRNG algorithm, and [RandomGeneratorFactory](#), which enables you to create PRNGs based on characteristics other than the algorithm's name.

See the [java.util.random](#) package for more detailed information about the PRNGs implemented in Java SE.

Topics

- [Characteristics of PRNGs](#)
- [Generating Pseudorandom Numbers with RandomGenerator Interface](#)
- [Generating Pseudorandom Numbers in Multithreaded Applications](#)
 - [Dynamically Creating New Generators](#)
 - [Creating Stream of Generators](#)
- [Choosing a PRNG Algorithm](#)

Characteristics of PRNGs

Because PRNGs generate a sequence of values based on an algorithm instead of a “random” physical source, this sequence will eventually restart. The number of values a PRNG generates before it restarts is called a period.

The state cycle of a PRNG consists of the sequence of all possible values a PRNG can generate. The state of a PRNG is the position of the last generated value in its state cycle.

In general, to generate a value, the PRNG bases it on the previously generated value. However, some PRNGs can generate a value many values further down the sequence without calculating any intermediate values. These are called jumpable PRNGs because they could jump far ahead in the sequence of values, usually by a fixed distance, typically 2^{64} . A leapable PRNG can jump even further, typically 2^{128} values. An arbitrarily jumpable PRNG can jump to any value in the generated sequence of values.

The `java.util.Random` Class Compared to Other PRNGs

The `java.util.random.RandomGeneratorFactory` class enables you to create various PRNGs, many of which are in the `jdk.random` package. The most significant difference between the PRNGs in `jdk.random` and the `java.util.Random` class is that `Random` has a very short period: only 2^{48} values.

Generating Pseudorandom Numbers with RandomGenerator Interface

The following example demonstrates the basic way to create a PRNG and use it to generate a random number:

```
RandomGenerator random1 = RandomGenerator.of("Random");
long value1 = random1.nextLong();
System.out.println(value1);
```

It uses the method `RandomGenerator.of(String)`. The argument of this method is the algorithm name of the PRNG. Java SE contains many PRNG classes. Unlike `Random`, however, most of them are in the `jdk.random` package.

The `RandomGenerator` interface contains many methods such as `nextLong()`, `nextInt()`, `nextDouble()`, and `nextBoolean()` to generate a random number of various primitive data types.

The following example demonstrates how to create a PRNG using the `RandomGeneratorFactory` class:

```
RandomGeneratorFactory<RandomGenerator> factory2 =
    RandomGeneratorFactory.of("SecureRandom");
RandomGenerator random2 = factory2.create();
long value2 = random2.nextLong();
System.out.println(value2);
```

To obtain a list of PRNGs implemented by Java SE, call the `RandomGeneratorFactory.all()` method:

```
RandomGeneratorFactory.all()
    .map(f -> f.name())
    .sorted()
    .forEach(n -> System.out.println(n));
```

This method returns a stream of all the available `RandomGeneratorFactory` instances available.

You can use the `RandomGeneratorFactory` class to create PRNGs based on characteristics other than an algorithm's name. The following example finds the PRNG with the longest period, and creates a `RandomGeneratorFactory` based on this characteristic:

```
RandomGeneratorFactory<RandomGenerator> greatest =
    RandomGeneratorFactory
        .all()
        .sorted((f, g) -> g.period().compareTo(f.period()))
        .findFirst()
        .orElse(RandomGeneratorFactory.of("Random"));
System.out.println(greatest.name());
System.out.println(greatest.group());
System.out.println(greatest.create().nextLong());
```

Generating Pseudorandom Numbers in Multithreaded Applications

If multiple threads in your application are generating sequences of values using PRNGs, then you want to ensure that there's no chance that these sequences contain values that coincide with each other, especially if they're using the same PRNG algorithm. (You would want to use the same PRNG algorithm to ensure that all your application's pseudorandom number sequences have the same statistical properties.) Splittable, jumpable, and leapable PRNGs are ideal for this; they can create a stream of generators that have the same statistical properties and are statistically independent.

There are two techniques you can use to incorporate PRNGs into your applications. You can dynamically create a new generator when an application needs to fork a new thread. Alternatively, you can create a stream of `RandomGenerator` objects based on an initial `RandomGenerator`, then map each `RandomGenerator` object from the stream to its own thread.

Dynamically Creating New Generators

If you're using a PRNG that implements the `RandomGenerator.SplittableGenerator` interface, then when a thread running in your application needs to fork a new thread, call the `split()` method. It creates a new generator with the same properties as the original generator. It does this by partitioning the original generator's period into two; each partition is for the exclusive use of either the original or new generator.

The following example uses the `L128X1024MixRandom` PRNG, which implements the `RandomGenerator.SplittableGenerator` interface. The `IntStream` `processes` stream represents tasks intended to be run on different threads.

```
int NUM_PROCESSES = 100;

RandomGeneratorFactory<SplittableGenerator> factory =
    RandomGeneratorFactory.of("L128X1024MixRandom");
SplittableGenerator random = factory.create();

IntStream processes = IntStream.rangeClosed(1, NUM_PROCESSES);

processes.parallel().forEach(p -> {
    RandomGenerator r = random.split();
    System.out.println(p + ": " + r.nextLong());
});
```

Splittable PRNGs generally have large periods to ensure that new objects resulting from a split use different state cycles. But even if two instances "accidentally" use the same state cycle, they are highly likely to traverse different regions of that shared state cycle.

Creating Stream of Generators

If the initial generator implements the interface `RandomGenerator.StreamableGenerator`, then call the method `rngs()`, `jumps()` (for jumpable generators), or `leaps()` (for leapable generators) to create a stream of generators. Call the `map()` method on the stream to assign each generator to its own thread.

When you call the `jumps()` method, the generator changes its state by jumping forward a large fixed distance within its state cycle, then creates a new generator based on the generator's new state. The generator repeatedly jumps and creates generators, creating a stream of generators. The `leaps()` method is similar; the size of the jump is much larger.

The following example creates a jumpable generator, then creates a stream of generators based on this initial generator by calling the `jumps()` method. The first several generators in the stream (defined by `NUM_TASKS`) are wrapped in a `Task` instance, then each `Task` is run in its own thread.

```
int NUM_TASKS = 10;

RandomGeneratorFactory<JumpableGenerator> factory =
    RandomGeneratorFactory.of("Xoshiro256PlusPlus");
JumpableGenerator random = factory.create();

class Task implements Runnable {
    private int p;
    private RandomGenerator r;
    public Task(RandomGenerator prng) {
        r = prng;
    }
    public void run() {
        System.out.println(r.nextLong());
    }
}

List<Thread> taskList = random
    .jumps()
    .limit(NUM_TASKS)
    .map(prng -> new Thread(new Task(prng)))
    .collect(Collectors.toList());
taskList.stream().forEach(t -> t.start());
```

Choosing a PRNG Algorithm

For applications (such as physical simulation, machine learning, and games) that don't require a cryptographically secure algorithm, the `java.util.random` package provides multiple implementations of interface `RandomGenerator` that focus on one or more PRNG properties, which include speed, space, period, accidental correlation, and equidistribution.

Note

As PRNG algorithms evolve, Java SE may add new PRNG algorithms and deprecate older ones. It's recommended that you don't use deprecated algorithms; they may be removed from a future Java SE release. Check if an algorithm has been deprecated by calling either the `RandomGenerator.isDeprecated()` or `RandomGeneratorFactory.isDeprecated()` method.

Cryptographically Secure

For applications that require a random number generator algorithm that is cryptographically secure, use the `SecureRandom` class in the `java.security` package.

See The `SecureRandom` Class in *Java Platform, Standard Edition Security Developer's Guide* for more information.

General Purpose

For applications with no special requirements, `L64X128MixRandom` balances speed, space, and period well. It's suitable for both single-threaded and multithreaded applications when used properly (a separate instance for each thread).

Single-Threaded, High Performance

For single-threaded applications, `Xoroshiro128PlusPlus` is small, fast, and has a sufficiently long period.

32-Bit Applications

For applications running in a 32-bit environment and using only one or a small number of threads, `L32X64StarStarRandom` or `L32X64MixRandom` are good choices.

Multithreaded Applications with Static Threads

For applications that use many threads that are allocated in one batch at the start of computation, consider a jumpable generator such as `Xoroshiro128PlusPlus` or `Xoshiro256PlusPlus` or a splittable generator such as `L64X128MixRandom` or `L64X256MixRandom`. If your application uses only floating-point values from a uniform distribution where no more than 32 bits of floating-point precision is required and exact equidistribution is not required, then `MRG32k3a`, a classic and well-studied algorithm, may be appropriate.

Multithreaded Applications with Dynamic Threads

For applications that create many threads dynamically, perhaps through the use of splitters, a splittable generator such as `L64X128MixRandom` or `L64X256MixRandom` is recommended.

If the number of generators created dynamically may be very large (millions or more), then using generators such as `L128X128MixRandom` or `L128X256MixRandom` will make it much less likely that two instances use the same state cycle.

Tuples of Consecutively Generated Values

For applications that use tuples of consecutively generated values, consider a generator that is k -equidistributed such that k is at least as large as the length of the tuples being generated. For example, the generator `L64X256MixRandom` is shown to be 4-equidistributed, which means that you can have a sequence of tuples that contain four values, and these tuples will be uniformly distributed (there's an equal chance that any 4-tuple will appear in the sequence). It's also shown that `L64X1024MixRandom` is 16-equidistributed.

Large Permutations

For applications that generate large permutations, consider a generator whose period is much larger than the total number of possible permutations; otherwise, it will be impossible to generate some of the intended permutations. For example, if the goal is to shuffle a deck of 52 cards, the number of possible permutations is $52!$ (52 factorial), which is approximately $2^{225.58}$, so it may be best to use a generator whose period is roughly 2^{256} or larger, such as `L64X256MixRandom`, `L64X1024MixRandom`, `L128X256MixRandom`, or `L128X1024MixRandom`.