

The software described in this documentation is either no longer supported or is in extended support.  
Oracle recommends that you upgrade to a current supported release.

# Oracle® Cloud Native Environment

## Container Runtimes for Release 1.3

**ORACLE®**

F50646-02

April 2022

The software described in this documentation is either no longer supported or is in extended support.  
Oracle recommends that you upgrade to a current supported release.

---

## **Oracle Legal Notices**

Copyright © 2019, 2022, Oracle and/or its affiliates.

---

## Table of Contents

Preface .....	v
1 Introduction to Container Runtimes .....	1
1.1 Introduction to runC .....	1
1.2 Introduction to Kata Containers .....	1
1.3 Setting Runtime Classes .....	2
2 Using runC .....	5
2.1 Installing runC .....	5
2.2 Creating runC Containers .....	5
3 Using Kata Containers .....	7
3.1 Installing Kata Containers .....	7
3.2 Checking Hardware .....	7
3.3 Creating Kata Containers .....	7



## Preface

This document contains information about using the container runtimes available with Oracle Cloud Native Environment.

Document generated on: 2022-04-29 (revision: 1232)

## Audience

This document is written for system administrators and developers who want to specify whether to use runC or Kata Containers as the runtime engine for containers with Oracle Cloud Native Environment. It is assumed that readers have a general understanding of the Oracle Linux operating system and container concepts.

## Related Documents

The latest version of this document and other documentation for this product are available at:

<https://docs.oracle.com/en/operating-systems/olcne/>

## Conventions

The following text conventions are used in this document:

Convention	Meaning
<b>boldface</b>	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
<i>italic</i>	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
<code>monospace</code>	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

## Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at <https://www.oracle.com/corporate/accessibility/>.

For information about the accessibility of the Oracle Help Center, see the Oracle Accessibility Conformance Report at <https://www.oracle.com/corporate/accessibility/templates/t2-11535.html>.

## Access to Oracle Support for Accessibility

Oracle customers that have purchased support have access to electronic support through My Oracle Support. For information, visit <https://www.oracle.com/corporate/accessibility/learning-support.html#support-tab>.

## Diversity and Inclusion

Oracle is fully committed to diversity and inclusion. Oracle respects and values having a diverse workforce that increases thought leadership and innovation. As part of our initiative to build a more inclusive culture

The software described in this documentation is either no longer supported or is in extended support.  
Oracle recommends that you upgrade to a current supported release.

## Diversity and Inclusion

---

that positively impacts our employees, customers, and partners, we are working to remove insensitive terms from our products and documentation. We are also mindful of the necessity to maintain compatibility with our customers' existing technologies and the need to ensure continuity of service as Oracle's offerings and industry standards evolve. Because of these technical constraints, our effort to remove insensitive terms is ongoing and will take time and external cooperation.

# Chapter 1 Introduction to Container Runtimes

This chapter introduces the container runtimes available in Oracle Cloud Native Environment. The available container runtimes are compliant with the Open Container Initiative (OCI) Runtime Specification.

This chapter provides introductory information about runC and Kata Containers.

This document does not attempt to explain how to use images to create containers in any detail, nor does it attempt to explain how to create and use Kubernetes pods or deployments.

For more detailed information on creating and managing containers using Kubernetes, see [Container Orchestration](#).

## 1.1 Introduction to runC

runC is a container runtime based on the Linux Foundation's Runtime Specification ([runtime-spec](#)). runC is developed by the Open Container Initiative.

runC is a component of Oracle Cloud Native Environment. runC is a Cloud Native Computing Foundation (CNCF) compliant environment to deploy microservices, and to orchestrate containers.

runC is based on a stable release of the upstream runC project. Differences between Oracle versions of the software and upstream releases are limited to Oracle specific fixes and patches for specific bugs.

For upstream runC documentation, see:

<https://github.com/opencontainers/runc/blob/master/man/runc.8.md>

For more information about runC, see:

<https://github.com/opencontainers/runc>

## 1.2 Introduction to Kata Containers

You can provide additional security and isolation of workloads using Kata Containers. Kata Containers is based on the upstream Kata Containers OpenStack Foundation project. Kata Containers delivers the framework for creating lightweight virtual machines, that can easily plug into a container ecosystem. Kata Containers offers additional levels of security, while maintaining the development and deployment speed of traditional containers.

Kata Containers is a component of Oracle Cloud Native Environment. Kata Containers is a Cloud Native Computing Foundation (CNCF) compliant environment to deploy microservices, and to orchestrate containers.

Kata Containers is based on a stable release of the upstream Kata Containers project. Differences between Oracle versions of the software and upstream releases are limited to Oracle specific fixes and patches for specific bugs.

For upstream Kata Containers documentation, see:

<https://github.com/kata-containers/documentation>


For more information about Kata Containers, see:

<https://katacontainers.io/>

## 1.3 Setting Runtime Classes

CRI-O uses a Kubernetes annotation or Runtime class set in the pod configuration file to decide whether to run a pod using `runc` or `kata-runtime`.

Figure 1.1 Kubernetes Runtimes

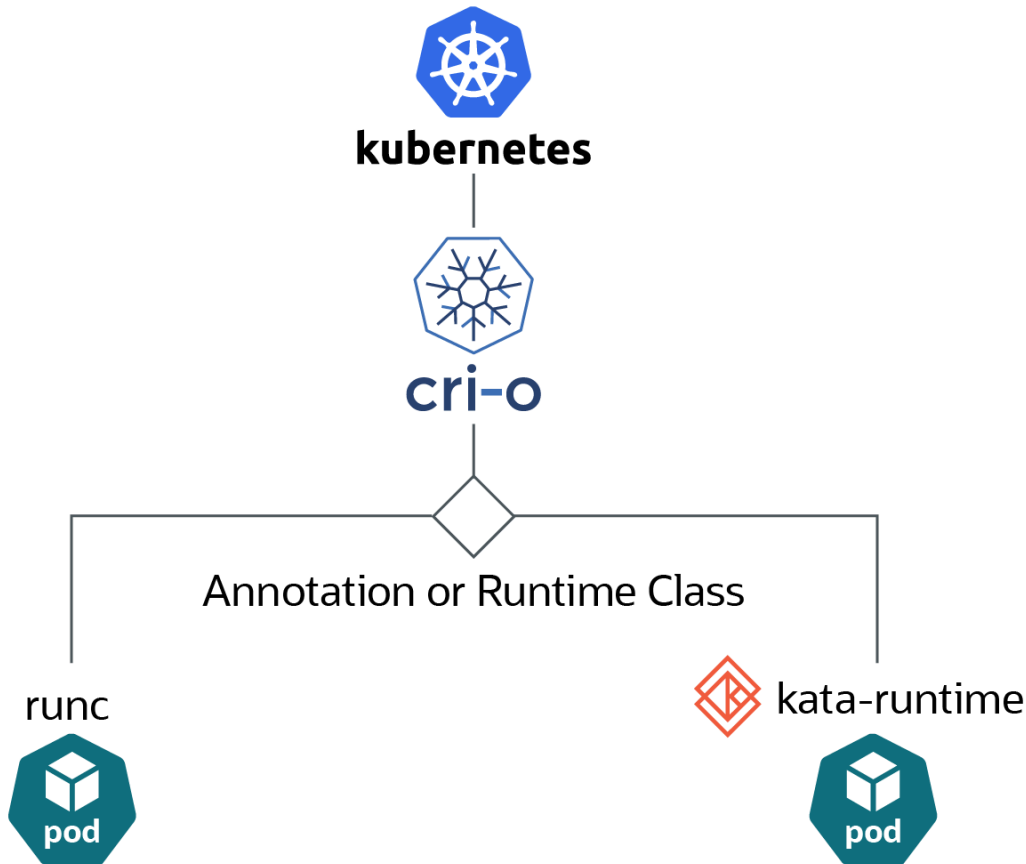

You can create Kubernetes runtime classes to specify whether containers should be run as the default runtime, `runc`, or using `kata-runtime`. The examples in this book use the name `native` to specify the use of `runc`, and the name `kata-containers` to specify the use of `kata-runtime`. You can use any name you like.

### To create a runtime class:

1. Create a file for a runtime class for Kata Containers named `kata-runtime.yaml` with the following contents:

```
kind: RuntimeClass
apiVersion: node.k8s.io/v1beta1
metadata:
  name: kata-containers
handler: kata
```

Load the runtime class to the Kubernetes deployment:



```
kubectl apply -f kata-runtime.yaml
```

The runtime class `kata-containers` can now be used in pod configuration files to specify a container should be run as a Kata container, using the `kata-containers` runtime. For examples of creating pods using this runtime class, see [Section 3.3, “Creating Kata Containers”](#).

2. (Optional) If you want to specify a runtime for `runc`, you can do this in a similar way. This is an optional configuration step. As `runc` is the default runtime, pods automatically run using `runc` unless you specify otherwise. This file is named `runc-runtime.yaml`:

```
kind: RuntimeClass
apiVersion: node.k8s.io/v1beta1
metadata:
  name: native
handler: runc
```

Load the runtime class to the Kubernetes deployment:

```
kubectl apply -f runc-runtime.yaml
```

The runtime class `native` can be used in pod configuration files to specify a container should be run as a runC container, using the `runc` runtime.

3. You can see a list of the available runtime classes for a Kubernetes cluster using the `kubectl get runtimeclass`. For example:

```
kubectl get runtimeclass
```

NAME	CREATED AT
kata-containers	2019-09-11T06:48:12Z
native	2019-09-11T07:08:56Z



## Chapter 2 Using runC

This chapter briefly discusses creating runC containers.

### 2.1 Installing runC

To deploy runC containers you must first set up an Oracle Cloud Native Environment, including the [kubernetes](#) module. For information on installing and deploying Oracle Cloud Native Environment, see [Getting Started](#).

### 2.2 Creating runC Containers

RunC is the default runtime when you create containers using the `kubect1` command. No special runtime class is needed. For information creating containers using `runc` as the runtime engine, see [Container Orchestration](#).



## Chapter 3 Using Kata Containers

This chapter briefly discusses creating Kata containers. This information can be used to verify the installation is successful, and that you can create containers using `kata-runtime` as the runtime engine.

### 3.1 Installing Kata Containers

To deploy Kata Containers you must first set up an Oracle Cloud Native Environment, including the `kubernetes` module. For information on installing and deploying Oracle Cloud Native Environment, see [Getting Started](#).

### 3.2 Checking Hardware

You can test whether your hardware is capable of running Kata Containers using the `kata-runtime kata-check` command. To use this command you must first have a running Kubernetes deployment. On a Kubernetes worker node, run:

```
sudo kata-runtime kata-check
```

For more information on using the `kata-runtime` command, use the `kata-runtime --help` command.

### 3.3 Creating Kata Containers

This section provide an example of creating a Kubernetes pod configuration file, which is used to create a container using `kata-runtime` as the runtime engine. Before you create Kata Containers, you should set up a Kubernetes runtime class for `kata-runtime`. For information on setting up a runtime class, see [Section 1.3, “Setting Runtime Classes”](#).

#### Example 3.1 Creating an NGINX container

This example uses a Kubernetes pod configuration file to create a Kata container. The pod configuration file creates an NGINX web server container, which is often used when testing containers.

**To create an NGINX Kata container:**

1. On a host that is set up to use the `kubectl` command to connect to the Kubernetes cluster, create a Kubernetes pod configuration file. To specify the container should be run as a Kata container, use the notation `runtimeClassName: kata-containers` in the pod file. When CRI-O encounters this runtime class in a pod file, it passes the container to `kata-runtime` to run the container.

This pod file is named `kata-nginx.yaml`.

```
apiVersion: v1
kind: Pod
metadata:
  name: kata-nginx
spec:
  runtimeClassName: kata-containers
  containers:
  - name: nginx
    image: nginx
    ports:
    - containerPort: 80
```

2. Create the Kata container using the `kata-nginx.yaml` file with the `kubectl apply` command:

```
kubectl apply -f kata-nginx.yaml
```

```
pod/nginx-kata created
```

3. To check the pod has been created, use the `kubectl get pods` command:

```
kubectl get pods
```

```
NAME          READY   STATUS    RESTARTS   AGE
kata-nginx    1/1     Running   0           11s
```

4. Use the `kubectl describe` command to show a more detailed view of the pod, including which worker node is hosting the pod and the Container ID.

```
kubectl describe pod kata-nginx
```

```
Name:          kata-nginx
Namespace:     default
Priority:       0
PriorityClassName: <none>
Node:          worker1.example.com/192.0.2.24
Start Time:    Thu, 12 Sep 2019 01:53:35 +0100
Labels:        <none>
Annotations:   kubectl.kubernetes.io/last-applied-configuration:
                {"apiVersion":"v1","kind":"Pod","metadata":{"annotations":{}}...
Status:        Running
IP:            10.244.3.3
Containers:
  mycontainer:
    Container ID:  cri-o://8f7d91a1893638498b3bbf74271e4b24361830e29ac65cc361a4c0...
    Image:         nginx
    Image ID:      docker.io/library/nginx@sha256:099019968725f0fc12c4b69b289a347...
    Port:          80/TCP
    Host Port:     0/TCP
    State:         Running
...

```

5. You can list the pods on a worker node using the `crictl pods` command. For example, on a worker node, run:

```
sudo crictl pods
```

```
POD ID          CREATED          STATE    NAME                NAMESPACE    ATTEMPT
03564d1e87df9  1 hours ago     Ready   kata-nginx          default       0
3bfabc5c7eea5  22 hours ago    Ready   kube-flannel-ds-6fkld kube-system   0
bb0delbfff1cdf 22 hours ago    Ready   kube-proxy-cc7tb   kube-system   0
```

You can see the `kata-nginx` container is running on this worker node.

For more information on using the `crictl` command, use the `crictl --help` command.

6. You can get more detailed information about the containers on a worker node using the `crictl ps` command. For example:

```
sudo crictl ps
```

```
CONTAINER      IMAGE                NAME                POD ID
8f7d91a189363  docker.io/library/ngin...  nginx                03564d1e87df9
0e9db3f09163a  0a95ca9313ebb9fc3708d8...  kube-flannel        3bfabc5c7eea5
f8350c6fe0c55  container-registry.ora...  kube-proxy          bb0delbfff1cdf
```

Note the Container ID is a shortened version of the `Container ID` shown in the pod description.

7. To get detailed information about a container, use the `crictl inspectp` command using the `POD ID`. For example:

```
sudo crictl inspectp 03564d1e87df9

{
  "status": {
    "id": "03564d1e87df9d7330e949e67e18252d2a02b0fac585293667d7dd7b92857b9b",
    "metadata": {
      "attempt": 0,
      "name": "kata-nginx",
      "namespace": "default",
      "uid": "bfda5be6-d4f7-11e9-8ad8-52540037f605"
    },
    "state": "SANDBOX_READY",
    "createdAt": "2019-09-12T01:53:35.552628639+01:00",
    "network": {
      "ip": "10.244.3.3"
    }
  }
  ...
}
```

8. To confirm the container is running using `kata-runtime`, use the `kata-runtime list` command. For example:

```
sudo kata-runtime list
```

ID	PID	STATUS	BUNDLE	...
03564d1e87df9d7330e949e67e1825...	20140	running	/run/containers/storage/...	
8f7d91a1893638498b3bbf74271e4b...	20191	running	/run/containers/storage...	

Note the `ID` is the same as the `Container ID` shown in the pod description.

9. You can delete the pod using the `kubectl delete` command on the control plane node:

```
kubectl delete pod kata-nginx

pod "kata-nginx" deleted
```

