Sun Studio 12: Performance Analyzer



Sun Microsystems, Inc. 4150 Network Circle Santa Clara, CA 95054 U.S.A.

Part No: 819-5264 September 2007 Copyright 2007 Sun Microsystems, Inc. 4150 Network Circle, Santa Clara, CA 95054 U.S.A. All rights reserved.

Sun Microsystems, Inc. has intellectual property rights relating to technology embodied in the product that is described in this document. In particular, and without limitation, these intellectual property rights may include one or more U.S. patents or pending patent applications in the U.S. and in other countries.

U.S. Government Rights – Commercial software. Government users are subject to the Sun Microsystems, Inc. standard license agreement and applicable provisions of the FAR and its supplements.

This distribution may include materials developed by third parties.

Parts of the product may be derived from Berkeley BSD systems, licensed from the University of California. UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd.

Sun, Sun Microsystems, the Sun logo, the Solaris logo, the Java Coffee Cup logo, docs.sun.com, Java, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the U.S. and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc.

The OPEN LOOK and Sun Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

Products covered by and information contained in this publication are controlled by U.S. Export Control laws and may be subject to the export or import laws in other countries. Nuclear, missile, chemical or biological weapons or nuclear maritime end uses or end users, whether direct or indirect, are strictly prohibited. Export or reexport to countries subject to U.S. embargo or to entities identified on U.S. export exclusion lists, including, but not limited to, the denied persons and specially designated nationals lists is strictly prohibited.

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Copyright 2007 Sun Microsystems, Inc. 4150 Network Circle, Santa Clara, CA 95054 U.S.A. Tous droits réservés.

Sun Microsystems, Inc. détient les droits de propriété intellectuelle relatifs à la technologie incorporée dans le produit qui est décrit dans ce document. En particulier, et ce sans limitation, ces droits de propriété intellectuelle peuvent inclure un ou plusieurs brevets américains ou des applications de brevet en attente aux Etats-Unis et dans d'autres pays.

Cette distribution peut comprendre des composants développés par des tierces personnes.

Certaines composants de ce produit peuvent être dérivées du logiciel Berkeley BSD, licenciés par l'Université de Californie. UNIX est une marque déposée aux Etats-Unis et dans d'autres pays; elle est licenciée exclusivement par X/Open Company, Ltd.

Sun, Sun Microsystems, le logo Sun, le logo Solaris, le logo Java Coffee Cup, docs.sun.com, Java et Solaris sont des marques de fabrique ou des marques déposées de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays. Toutes les marques SPARC sont utilisées sous licence et sont des marques de fabrique ou des marques déposées de SPARC International, Inc. aux Etats-Unis et dans d'autres pays. Les produits portant les marques SPARC sont basés sur une architecture développée par Sun Microsystems. Inc.

L'interface d'utilisation graphique OPEN LOOK et Sun a été développée par Sun Microsystems, Inc. pour ses utilisateurs et licenciés. Sun reconnaît les efforts de pionniers de Xerox pour la recherche et le développement du concept des interfaces d'utilisation visuelle ou graphique pour l'industrie de l'informatique. Sun détient une licence non exclusive de Xerox sur l'interface d'utilisation graphique Xerox, cette licence couvrant également les licenciés de Sun qui mettent en place l'interface d'utilisation graphique OPEN LOOK et qui, en outre, se conforment aux licences écrites de Sun.

Les produits qui font l'objet de cette publication et les informations qu'il contient sont régis par la legislation américaine en matière de contrôle des exportations et peuvent être soumis au droit d'autres pays dans le domaine des exportations et importations. Les utilisations finales, ou utilisateurs finaux, pour des armes nucléaires, des missiles, des armes chimiques ou biologiques ou pour le nucléaire maritime, directement ou indirectement, sont strictement interdites. Les exportations ou réexportations vers des pays sous embargo des Etats-Unis, ou vers des entités figurant sur les listes d'exclusion d'exportation américaines, y compris, mais de manière non exclusive, la liste de personnes qui font objet d'un ordre de ne pas participer, d'une façon directe ou indirecte, aux exportations des produits ou des services qui sont régis par la legislation américaine en matière de contrôle des exportations et la liste de ressortissants spécifiquement designés, sont rigoureusement interdites.

LA DOCUMENTATION EST FOURNIE "EN L'ETAT" ET TOUTES AUTRES CONDITIONS, DECLARATIONS ET GARANTIES EXPRESSES OU TACITES SONT FORMELLEMENT EXCLUES, DANS LA MESURE AUTORISEE PAR LA LOI APPLICABLE, Y COMPRIS NOTAMMENT TOUTE GARANTIE IMPLICITE RELATIVE A LA QUALITE MARCHANDE, A L'APTITUDE A UNE UTILISATION PARTICULIERE OU A L'ABSENCE DE CONTREFACON.

Contents

	Preface	13
1	Overview of the Performance Analyzer	19
	Starting the Performance Analyzer From the Integrated Development Environment	19
	The Tools of Performance Analysis	19
	The Collector Tool	20
	The Performance Analyzer Tool	20
	The er_print Utility	21
	The tcov Utility	21
	The Performance Analyzer Window	21
	Traditional UNIX Performance Tools	22
2	Performance Data	23
	What Data the Collector Collects	24
	Clock Data	25
	Hardware Counter Overflow Profiling Data	26
	Synchronization Wait Tracing Data	29
	Heap Tracing (Memory Allocation) Data	30
	MPI Tracing Data	31
	Global (Sampling) Data	32
	How Metrics Are Assigned to Program Structure	33
	Function-Level Metrics: Exclusive, Inclusive, and Attributed	33
	Interpreting Attributed Metrics: An Example	35
	How Recursion Affects Function-Level Metrics	
3	Collecting Performance Data	39
_	Compiling and Linking Your Program	
	Companie and Dinails Tour Hogiani	37

Source Code Information	39
Static Linking	40
Optimization at Compile Time	40
Compiling Java Programs	40
Preparing Your Program for Data Collection and Analysis	41
Using Dynamically Allocated Memory	41
Using System Libraries	42
Using Signal Handlers	43
Using setuid	43
Program Control of Data Collection	44
The C, C++, Fortran, and Java API Functions	46
Dynamic Functions and Modules	47
Limitations on Data Collection	48
Limitations on Clock-Based Profiling	49
Limitations on Collection of Tracing Data	49
Limitations on Hardware Counter Overflow Profiling	49
Runtime Distortion and Dilation With Hardware Counter Overflow Profiling	50
Limitations on Data Collection for Descendant Processes	50
Limitations on Java Profiling	50
Runtime Performance Distortion and Dilation for Applications Written in the Java Programming Language	51
Where the Data Is Stored	
Experiment Names	52
Moving Experiments	53
Estimating Storage Requirements	53
Collecting Data	54
Collecting Data Using the collect Command	55
Data Collection Options	55
Experiment Control Options	59
Output Options	63
Other Options	64
Collecting Data From a Running Process Using the collect Utility	65
▼ To Collect Data From a Running Process Using the collect Utility	65
Collecting Data Using the dbx collector Subcommands	66
▼ To Run the Collector From dbx:	
Data Collection Subcommands	66

	Experiment Control Subcommands	70
	Output Subcommands	70
	Information Subcommands	71
	Collecting Data From a Running Process With dbx	72
	▼ To Collect Data From a Running Process That is Not Under the Control of dbx:	72
	Collecting Tracing Data From a Running Program	73
	Collecting Data From MPI Programs	74
	Storing MPI Experiments	75
	Running the collect Command Under MPI	76
	Collecting Data by Starting dbx Under MPI	77
	Using collect With ppgsz	78
4	The Performance Analyzer Tool	
	Starting the Performance Analyzer	79
	Analyzer Options	80
	Analyzer Default Settings	81
	Performance Analyzer GUI	82
	The Menu Bar	82
	Toolbar	
	Analyzer Data Displays	
	Setting Data Presentation Options	92
	Saving Data Presentation Options	94
	Finding Text and Data	
	Showing or Hiding Functions	
	Filtering Data	
	Experiment Selection	
	Sample Selection	
	Thread Selection	
	LWP Selection	
	CPU Selection	
	Recording Experiments	
	Generating Mapfiles and Function Reordering	
	Default Settings for Analyzer	98

5	Kernel Profiling	99
	Kernel Experiments	99
	Setting Up Your System for Kernel Profiling	99
	Running the er_kernel Utility	100
	▼ Profiling the Kernel	100
	▼ Profiling Under Load	101
	▼ Profiling the Kernel and Load Together	101
	Profiling a Specific Process or Kernel Thread	101
	Analyzing a Kernel Profile	102
6	The er_print Command Line Performance Analysis Tool	103
	er_print Syntax	104
	Metric Lists	105
	Commands That Control the Function List	108
	functions	108
	metrics metric_spec	108
	sort metric_spec	109
	fsummary	110
	${\tt fsingle} \ \textit{function_name} \ [N] \ \dots \\$	110
	Commands That Control the Callers-Callees List	110
	callers-callees	110
	cmetrics metric_spec	111
	${\tt csingle} \ \textit{function_name} \ [N] \$	112
	csort metric_spec	112
	Commands That Control the Leak and Allocation Lists	
	leaks	112
	allocs	113
	Commands That Control the Source and Disassembly Listings	113
	pcs	113
	psummary	113
	lines	113
	lsummary	113
	source { filename function_name } [N]	113
	${\tt disasm}~\{~{\it filename}~ ~{\it function_name}~\}~[~N]~$	114
	scc com_spec	114

sthresh <i>value</i>	115
dcc com_spec	115
dthresh value	116
cc com_spec	116
setpath path_list	116
addpath path_list	116
pathmap old-prefix new-prefix	117
Commands That Control the Data Space List	117
data_objects	117
${\sf data_single}\ name\ [N]$	117
data_layout	117
data_metrics metric_spec	117
data_sort	118
Commands That Control Memory Object Lists	118
memobj $mobj_type$	118
mobj_list	119
<pre>mobj_define mobj_type index_exp</pre>	119
Commands That Control Index Object Lists	119
indxobj <i>indxobj_type</i>	119
indxobj_list	120
<pre>indxobj_define indxobj_type index_exp</pre>	120
<pre>indxobj_metrics metric_spec</pre>	120
indxobj_sort metric_spec	120
Commands That Support the Thread Analyzer	121
races	121
rdetail race_id	121
deadlocks	121
ddetail deadlock_id	121
Commands That List Experiments, Samples, Threads, and LWPs	121
experiment_list	121
sample_list	122
lwp_list	122
thread_list	122
cpu_list	122
Commands That Control Filtering of Experiment Data	122
Specifying a Filter Expression	

Selecting Samples, Threads, LWPs, and CPUs for Filtering	123
Commands That Control Load Object Expansion and Collapse	124
object_list	124
object_select object1,object2,	125
Commands That List Metrics	125
metric_list	125
cmetric_list	126
data_metric_list	126
indx_metric_list	126
Commands That Control Output	126
outfile { filename - }	126
appendfile filename	127
limit n	127
<pre>name { long short } [:{ shared_object_name no_shared_object_name }]"</pre>	127
<pre>viewmode { user expert machine }</pre>	127
Commands That Print Other Information	128
header exp_id	128
ifreq	128
objects	128
overview exp_id	128
statistics exp_id	129
Commands That Set Defaults	129
dmetrics metric_spec	129
dsort metric_spec	130
en_desc { on off =regexp}	130
Commands That Set Defaults Only For the Performance Analyzer	130
tabs tab_spec	130
rtabs tab_spec	131
tlmode tl_mode	131
tldata tl_data	131
Miscellaneous Commands	132
mapfile load-object { mapfilename - }	132
procstats	132
script file	132
version	132
quit	132

	help	132
	Expression Grammar	133
	er_print command Examples	134
7	Understanding the Performance Analyzer and Its Data	137
	How Data Collection Works	137
	Experiment Format	138
	Recording Experiments	140
	Interpreting Performance Metrics	141
	Clock-Based Profiling	141
	Synchronization Wait Tracing	144
	Hardware Counter Overflow Profiling	144
	Heap Tracing	145
	Dataspace Profiling	146
	MPI Tracing	146
	Call Stacks and Program Execution	147
	Single-Threaded Execution and Function Calls	147
	Explicit Multithreading	150
	Overview of Java Technology-Based Software Execution	151
	Java Processing Representations	152
	Overview of OpenMP Software Execution	154
	Incomplete Stack Unwinds	163
	Mapping Addresses to Program Structure	164
	The Process Image	164
	Load Objects and Functions	165
	Aliased Functions	165
	Non-Unique Function Names	166
	Static Functions From Stripped Shared Libraries	166
	Fortran Alternate Entry Points	167
	Cloned Functions	167
	Inlined Functions	167
	Compiler-Generated Body Functions	168
	Outline Functions	169
	Dynamically Compiled Functions	169
	The <unknown> Function</unknown>	170

	OpenMP Special Functions	170
	The < JVM-System> Function	171
	The <no callstack="" java="" recorded=""> Function</no>	171
	The <truncated-stack> Function</truncated-stack>	171
	The <total> Function</total>	171
	Functions Related to Hardware Counter Overflow Profiling	172
	Mapping Performance Data to Index Objects	172
	Mapping Data Addresses to Program Data Objects	173
	Data Object Descriptors	173
	Mapping Performance Data to Memory Objects	175
8	Understanding Annotated Source and Disassembly Data	177
	Annotated Source Code	177
	Performance Analyzer Source Tab Layout	177
	Annotated Disassembly Code	184
	Interpreting Annotated Disassembly	186
	Special Lines in the Source, Disassembly and PCs Tabs	188
	Outline Functions	188
	Compiler-Generated Body Functions	189
	Dynamically Compiled Functions	190
	Java Native Functions	192
	Cloned Functions	193
	Static Functions	193
	Inclusive Metrics	194
	Branch Target	194
	Viewing Source/Disassembly Without An Experiment	195
	- func	195
9	Manipulating Experiments	197
	Manipulating Experiments	197
	Copying Experiments With the er_cp Utility	197
	Moving Experiments With the er_mv Utility	198
	Deleting Experiments With the er_rm Utility	198
	Other Utilities	198
	The er_archive Utility	198

The er_export Utility	200
Index	201

Preface

This manual describes the performance analysis tools in the Sun[™] Studio 12 software.

The Collector and Performance Analyzer are a pair of tools that perform statistical profiling of a wide range of performance data and tracing of various system calls, and relate the data to program structure at the function, source line and instruction level.

This manual is intended for application developers with a working knowledge of Fortran, C, C++, or $Java^{TM}$ programming languages. Users of the performance tools need some understanding of the Solaris TM Operating System (Solaris OS), or the Linux operating system, and $UNIX^*$ operating system commands. Some knowledge of performance analysis is helpful but is not required to use the tools.

How This Book Is Organized

Chapter 1, "Overview of the Performance Analyzer" introduces the performance analysis tools, briefly discussing what they do and when to use them.

Chapter 2, "Performance Data" describes the data collected by the Collector and how the data is converted into metrics of performance.

Chapter 3, "Collecting Performance Data" describes how to use the Collector to collect timing data, synchronization delay data, and hardware event data from your program.

Chapter 4, "The Performance Analyzer Tool" describes how to start the Performance Analyzer and how to use the tool to analyze performance data collected by the Collector.

Chapter 5, "Kernel Profiling" describes how you can use the Sun Studio performance tools to profile the kernel while the Solaris OS is running a load.

Chapter 6, "The er_print Command Line Performance Analysis Tool" describes how to use the er_print command line interface to analyze the data collected by the Collector.

Chapter 7, "Understanding the Performance Analyzer and Its Data" describes the process of converting the data collected by the Collector into performance metrics and how the metrics are related to program structure.

Chapter 8, "Understanding Annotated Source and Disassembly Data" describes how to use and understand the information in the source and disassembly windows of the Performance Analyzer.

Chapter 9, "Manipulating Experiments" presents information on the utilities that are provided for manipulating and converting performance experiments and viewing annotated source code and disassembly code without running an experiment.

Typographic Conventions

The following table describes the typographic conventions that are used in this book.

TABLE P-1 Typographic Conventions

Typeface	Meaning	Example
AaBbCc123	The names of commands, files, and directories,	Edit your . login file.
	and onscreen computer output	Use 1s -a to list all files.
		machine_name% you have mail.
AaBbCc123	What you type, contrasted with onscreen	machine_name% su
	computer output	Password:
aabbcc123	Placeholder: replace with a real name or value	The command to remove a file is rm filename.
AaBbCc123	Book titles, new terms, and terms to be	Read Chapter 6 in the <i>User's Guide</i> .
	emphasized	A <i>cache</i> is a copy that is stored locally.
		Do <i>not</i> save the file.
		Note: Some emphasized items appear bold online.

Shell Prompts in Command Examples

The following table shows the default UNIX system prompt and superuser prompt for the C shell, Bourne shell, and Korn shell.

TABLE P-2 Shell Prompts

Shell	Prompt
C shell	machine_name%
C shell for superuser	machine_name#
Bourne shell and Korn shell	\$
Bourne shell and Korn shell for superuser	#

Supported Platforms

This Sun Studio release supports systems that use the SPARC* and x86 families of processor architectures: UltraSPARC*, SPARC64, AMD64, Pentium, and Xeon EM64T. The supported systems for the version of the Solaris Operating System you are running are available in the hardware compatibility lists at http://www.sun.com/bigadmin/hcl. These documents cite any implementation differences between the platform types.

In this document, these x86 related terms mean the following:

- "x86" refers to the larger family of 64-bit and 32-bit x86 compatible products.
- "x64' points out specific 64-bit information about AMD64 or EM64T systems.
- "32-bit x86" points out specific 32-bit information about x86 based systems.

For supported systems, see the hardware compatibility lists.

Accessing Sun Studio Documentation

You can access the documentation at the following locations:

- The documentation is available from the documentation index that is installed with the software on your local system or network at file:/opt/SUNWspro/docs/index.html on Solaris platforms, and at file:/opt/sun/sunstudio12/docs/index.html on Linux platforms.
 - If your software is not installed in the /opt directory on a Solaris platform or the /opt/sun directory on a Linux platform, ask your system administrator for the equivalent path on your system.
- The documentation index is also available online from the Sun Studio portal at http://developers.sun.com/sunstudio/documentation/ss12.
- The latest release notes are available from the Sun Studio portal at http://developers.sun.com/sunstudio/documentation/ss12/release_notes.html.
- Online help for all components of the IDE is available through the Help menu, as well as through Help buttons on many windows and dialog boxes, in the IDE.

The http://docs.sun.com/ web site enables you to read, print, and buy Sun Microsystems manuals through the Internet. If you cannot find a manual, see the documentation index that is installed with the software on your local system or network.

Note – Sun is not responsible for the availability of third-party Web sites mentioned in this document. Sun does not endorse and is not responsible or liable for any content, advertising, products, or other materials that are available on or through such sites or resources. Sun will not be responsible or liable for any actual or alleged damage or loss caused by or in connection with the use of or reliance on any such content, goods, or services that are available on or through such sites or resources.

Accessing Related Solaris Documentation

The following table describes related documentation that is available through the docs.sun.com web site.

Document Collection	Document Title	Description
Solaris 10 Reference Manual Collection	See the titles of man page sections.	Provides information about the Solaris OS.
Solaris 10 Software Developer Collection	Linker and Libraries Guide	Describes the operations of the Solaris link-editor and runtime linker.
Solaris 10 Software Developer Collection	Multithreaded Programming Guide	Covers the POSIX® and Solaris threads APIs, programming with synchronization objects, compiling multithreaded programs, and finding tools for multithreaded programs.
Solaris 10 Software Developer Collection	SPARC Assembly Language Reference Manual	Describes the assembly language for SPARC processors.
Solaris 10 System Administrator Collection	Solaris Tunable Parameters Reference Manual	Provides reference information on Solaris tunable parameters.

Resources for Developers

Visit http://developers.sun.com/sunstudio to find these frequently updated resources:

- Articles on programming techniques and best practices
- A knowledge base of short programming tips
- Documentation of compilers and tools components, as well as corrections to the documentation that is installed with your software

- Information on support levels
- User forums
- Downloadable code samples
- New technology previews

You can find resources for the Performance Analyzer at http://developers.sun.com/sunstudio/analyzer index.html.

Documentation, Support, and Training

The Sun web site provides information about the following additional resources:

- Documentation (http://www.sun.com/documentation/)
- Support (http://www.sun.com/support/)
- Training (http://www.sun.com/training/)

Contacting Sun Technical Support

If you have technical questions about this product that are not answered in this document, go to:

http://www.sun.com/service/contacting

Sending Your Comments

Sun is interested in improving its documentation and welcomes your comments and suggestions. Submit your comments to Sun at this URL

http://www.sun.com/documentation/feedback/feedback.jsp

Please include the part number (819-5264-10) of your document.

◆ ◆ ◆ CHAPTER 1

Overview of the Performance Analyzer

Developing high performance applications requires a combination of compiler features, libraries of optimized functions, and tools for performance analysis. The *Performance Analyzer* manual describes the tools that are available to help you assess the performance of your code, identify potential performance problems, and locate the part of the code where the problems occur.

Starting the Performance Analyzer From the Integrated Development Environment

For information on starting the Performance Analyzer from the Integrated Development Environment (IDE), see the Performance Analyzer Readme, which is available through the documentation index at /installation_directory/docs/index.html. The default installation directory on Solaris platforms is /opt/SUNWspro. The default installation directory on Linux platforms is /opt/sun/sunstudio12. If the Sun Studio 12 compilers and tools are not installed in the /opt directory, ask your system administrator for the equivalent path on your system.

The Tools of Performance Analysis

This manual describes the Collector and Performance Analyzer, a pair of Sun Studio tools that you use to collect and analyze performance data for your application. Both tools can be used from the command line or from a graphical user interface.

The Collector and Performance Analyzer are designed for use by any software developer, even if performance tuning is not the developer's main responsibility. These tools provide a more flexible, detailed, and accurate analysis than the commonly used profiling tools prof and gprof, and are not subject to an attribution error in gprof.

The Collector and Performance Analyzer tools help to answer the following kinds of questions:

- How much of the available resources does the program consume?
- Which functions or load objects are consuming the most resources?
- Which source lines and instructions are responsible for resource consumption?
- How did the program arrive at this point in the execution?
- Which resources are being consumed by a function or load object?

The Collector Tool

The Collector tool collects performance data using a statistical method called profiling and by tracing function calls. The data can include call stacks, microstate accounting information, thread synchronization delay data, hardware counter overflow data, Message Passing Interface (MPI) function call data, memory allocation data, and summary information for the operating system and the process. The Collector can collect all kinds of data for C, C++ and Fortran programs, and it can collect profiling data for applications written in the Java™ programming language. It can collect data for dynamically-generated functions and for descendant processes. See Chapter 2, "Performance Data" for information about the data collected and Chapter 3, "Collecting Performance Data" for detailed information about the Collector. The Collector can be run from the Performance Analyzer GUI, from the IDE, from the dbx command line tool, and using the collect command.

The Performance Analyzer Tool

The Performance Analyzer tool displays the data recorded by the Collector, so that you can examine the information. The Performance Analyzer processes the data and displays various metrics of performance at the level of the program, the functions, the source lines, and the instructions. These metrics are classed into five groups:

- Clock profiling metrics
- Hardware counter metrics
- Synchronization delay metrics
- Memory allocation metrics
- MPI tracing metrics

The Performance Analyzer also displays the raw data in a graphical format as a function of time. The Performance Analyzer can create a mapfile that you can use to change the order of function loading in the program's address space, to improve performance.

See Chapter 4, "The Performance Analyzer Tool" and the online help in the IDE or the Performance Analyzer GUI for detailed information about the Performance Analyzer.

Chapter 5, "Kernel Profiling" describes how you can use the Sun Studio performance tools to profile the kernel while the Solaris™ Operating System (Solaris OS) is running a load.

Chapter 6, "The er_print Command Line Performance Analysis Tool" describes how to use the er_print command line interface to analyze the data collected by the Collector.

Chapter 7, "Understanding the Performance Analyzer and Its Data" discusses topics related to understanding the performance analyzer and its data, including: how data collection works, interpreting performance metrics, call stacks and program execution, and annotated code listings. Annotated source code listings and disassembly code listings that include compiler commentary but do not include performance data can be viewed with the er_src utility (see Chapter 9, "Manipulating Experiments" for more information).

Chapter 8, "Understanding Annotated Source and Disassembly Data" provides an understanding of the annotated source and disassembly, providing explanations about the different types of index lines and compiler commentary that the Performance Analyzer displays.

Chapter 9, "Manipulating Experiments" describes how to copy, move, delete, archive, and export experiments.

Theer print Utility

The er_print utility presents in plain text all the displays that are presented by the Performance Analyzer, with the exception of the Timeline display.

The tcov Utility

The Sun Studio software includes an additional profiling tool called tcov, which generates exact counts of the number of times each statement in a program is executed. See the tcov(1) man page for more information about this tool.

The Performance Analyzer Window

Note – The following is a brief overview of the Performance Analyzer window. See Chapter 4, "The Performance Analyzer Tool" and the online help for a complete and detailed discussion of the functionality and features of the tabs discussed below.

The Performance Analyzer window consists of a multi-tabbed display, with a menu bar and a toolbar. The tab that is displayed when the Performance Analyzer is started shows a list of functions for the program with exclusive and inclusive metrics for each function. The list can be filtered by load object, by thread, by lightweight process (LWP), by CPU, and by time slice.

For a selected function, another tab displays the callers and callees of the function. This tab can be used to navigate the call tree—in search of high metric values, for example.

Two other tabs display source code that is annotated line-by-line with performance metrics and interleaved with compiler commentary, and disassembly code that is annotated with metrics for each instruction and interleaved with both source code and compiler commentary if they are available.

The performance data is displayed as a function of time in another tab.

Other tabs show details of the experiments and load objects, summary information for a function, memory leaks, and statistics for the process.

Other tabs show Index Objects, Memory Objects, Data Objects, Data Layout, Lines, and PCs. See the "Analyzer Data Displays" on page 82 for more information about each tab.

For experiments that have recorded Thread Analyzer data, tabs for data Races and Deadlocks are also available. Tabs are shown only if the loaded experiments have data supporting them.

See the *Sun Studio 12: Thread Analyzer User's Guide* for more information about Thread Analyzer.

You can navigate the Performance Analyzer from the keyboard as well as with a mouse.

Traditional UNIX Performance Tools

The Solaris OS has long provided two standard UNIX® profiling tools prof and gprof. The prof utility generates a statistical profile of the CPU time used by a program and an exact count of the number of times each function is entered. The gprof utility generates a statistical profile of the CPU time used by a program, along with an exact count of the number of times each function is entered and the number of times each arc (caller-callee pair) in the program's call graph is traversed. These tools, while useful for simple programs, are not adequate for tuning complex programs. See the prof(1) and gprof(1) man pages for more information about these standard tools.



Performance Data

The performance tools work by recording data about specific events while a program is running, and converting the data into measurements of program performance called metrics.

This chapter describes the data collected by the performance tools, how it is processed and displayed, and how it can be used for performance analysis. Because there is more than one tool that collects performance data, the term Collector is used to refer to any of these tools. Likewise, because there is more than one tool that analyzes performance data, the term analysis tools is used to refer to any of these tools.

This chapter covers the following topics.

- "What Data the Collector Collects" on page 24
- "How Metrics Are Assigned to Program Structure" on page 33

See Chapter 3, "Collecting Performance Data" for information on collecting and storing performance data.

See Chapter 4, "The Performance Analyzer Tool" for information on analyzing performance data with the performance analyzer.

See Chapter 5, "Kernel Profiling" for information on profiling the kernel while the Solaris OS is running a load.

See Chapter 6, "The er_print Command Line Performance Analysis Tool" for information on analyzing performance data with the er print utility.

What Data the Collector Collects

The Collector collects three different kinds of data: profiling data, tracing data and global data.

- Profiling data is collected by recording profile events at regular intervals. The interval is either a time interval obtained by using the system clock or a number of hardware events of a specific type. When the interval expires, a signal is delivered to the system and the data is recorded at the next opportunity.
- Tracing data is collected by interposing a wrapper function on various system functions so that calls to the system functions can be intercepted and data recorded about the calls.
- Global data is collected by calling various system routines to obtain information. The global data packet is called a sample.

Both profiling data and tracing data contain information about specific events, and both types of data are converted into performance metrics. Global data is not converted into metrics, but is used to provide markers that can be used to divide the program execution into time segments. The global data gives an overview of the program execution during that time segment.

The data packets collected at each profiling event or tracing event include the following information:

- A header identifying the data
- A high-resolution timestamp
- A thread ID
- A lightweight process (LWP) ID
- A processor (CPU) ID, when available from the operating system
- A copy of the call stack. For Java programs, two call stacks are recorded: the machine call stack and the Java call stack.
- For OpenMP programs, an identifier for the current parallel region and the OpenMP state are also collected

For more information on threads and lightweight processes, see Chapter 7, "Understanding the Performance Analyzer and Its Data."

In addition to the common data, each event-specific data packet contains information specific to the data type. The five types of data that the Collector can record are:

- Clock profile data
- Hardware counter overflow profiling data
- Synchronization wait tracing data
- Heap tracing (memory allocation) data
- MPI tracing data

These five data types, the metrics that are derived from them, and how you might use them, are described in the following subsections. A sixth type of data, global sampling data, cannot be converted to metrics because it does not include call stack information.

Clock Data

When you are doing clock-based profiling, the data collected depends on the metrics provided by the operating system.

Clock-based Profiling Under the Solaris OS

In clock-based profiling under the Solaris OS, the state of each LWP is stored at regular time intervals. This time interval is called the profiling interval. The information is stored in an integer array: one element of the array is used for each of the ten microaccounting states maintained by the kernel. The data collected is converted by the Performance Analyzer into times spent in each state, with a resolution of the profiling interval. The default profiling interval is approximately 10 milliseconds (10 ms). The Collector provides a high-resolution profiling interval of approximately 1 ms and a low-resolution profiling interval of approximately 100 ms, and, where the OS permits, allows arbitrary intervals. Running the collect command with no arguments prints the range and resolution allowable on the system on which it is run.

The metrics that are computed from clock-based data are defined in the following table.

TABLE 2-1 Solaris Timing Metrics

Metric	Definition
User CPU time	LWP time spent running in user mode on the CPU.
Walltime	LWP time spent in LWP 1. This is usually the "wall clock time"
Total LWP time	Sum of all LWP times.
System CPU time	LWP time spent running in kernel mode on the CPU or in a trap state.
Wait CPU time	LWP time spent waiting for a CPU.
User lock time	LWP time spent waiting for a lock.
Text page fault time	LWP time spent waiting for a text page.
Data page fault time	LWP time spent waiting for a data page.
Other wait time	LWP time spent waiting for a kernel page, or time spent sleeping or stopped.

For multithreaded experiments, times other than wall clock time are summed across all LWPs. Wall time as defined is not meaningful for multiple-program multiple-data (MPMD) programs.

Timing metrics tell you where your program spent time in several categories and can be used to improve the performance of your program.

- High user CPU time tells you where the program did most of the work. It can be used to find the parts of the program where there may be the most gain from redesigning the algorithm.
- High system CPU time tells you that your program is spending a lot of time in calls to system routines.
- High wait CPU time tells you that there are more threads ready to run than there are CPUs available, or that other processes are using the CPUs.
- High user lock time tells you that threads are unable to obtain the lock that they request.
- High text page fault time means that the code generated by the linker is organized in memory so that calls or branches cause a new page to be loaded. Creating and using a mapfile (see "Generating and Using a Mapfile" in the Performance Analyzer online help) can fix this kind of problem.
- High data page fault time indicates that access to the data is causing new pages to be loaded.
 Reorganizing the data structure or the algorithm in your program can fix this problem.

Clock-based Profiling Under the Linux OS

Under the Linux OS, the only metric available is User CPU time. Although the total CPU utilization time reported is accurate, it may not be possible for the Analyzer to determine the proportion of the time that is actually System CPU time as accurately as for the Solaris OS. Although the Analyzer displays the information as if the data were for a lightweight process (LWP), in reality there are no LWP's on a Linux OS; the displayed LWP ID is actually the thread ID.

Hardware Counter Overflow Profiling Data

Hardware counters keep track of events like cache misses, cache stall cycles, floating-point operations, branch mispredictions, CPU cycles, and instructions executed. In hardware counter overflow profiling, the Collector records a profile packet when a designated hardware counter of the CPU on which an LWP is running overflows. The counter is reset and continues counting. The profile packet includes the overflow value and the counter type.

Various CPU families support from two to eighteen simultaneous hardware counter registers. The Collector can collect data on one or more registers. For each register the Collector allows you to select the type of counter to monitor for overflow, and to set an overflow value for the counter. Some hardware counters can use any register, others are only available on a particular register. Consequently, not all combinations of hardware counters can be chosen in a single experiment.

Hardware counter overflow profiling data is converted by the Performance Analyzer into count metrics. For counters that count in cycles, the metrics reported are converted to times; for counters that do not count in cycles, the metrics reported are event counts. On machines with

multiple CPUs, the clock frequency used to convert the metrics is the harmonic mean of the clock frequencies of the individual CPUs. Because each type of processor has its own set of hardware counters, and because the number of hardware counters is large, the hardware counter metrics are not listed here. The next subsection tells you how to find out what hardware counters are available.

One use of hardware counters is to diagnose problems with the flow of information into and out of the CPU. High counts of cache misses, for example, indicate that restructuring your program to improve data or text locality or to increase cache reuse can improve program performance.

Some of the hardware counters provide similar or related information. For example, branch mispredictions and instruction cache misses are often related because a branch misprediction causes the wrong instructions to be loaded into the instruction cache, and these must be replaced by the correct instructions. The replacement can cause an instruction cache miss, or an instruction translation lookaside buffer (ITLB) miss, or even a page fault.

Hardware counter overflows are often delivered one or more instructions after the instruction which caused the event and the corresponding event counter to overflow: this is referred to as "skid" and it can make counter overflow profiles difficult to interpret. In the absence of hardware support for precise identification of the causal instruction, an apropos backtracking search for a candidate causal instruction may be attempted.

When such backtracking is supported and specified during collection, hardware counter profile packets additionally include the PC (program counter) and EA (effective address) of a candidate memory-referencing instruction appropriate for the hardware counter event. (Subsequent processing during analysis is required to validate the candidate event PC and EA.) This additional information about memory-referencing events facilitates various data-oriented analyses.

Backtracking and recording of a candidate event PC and EA can also be specified for clock-profiling.

Hardware Counter Lists

Hardware counters are processor-specific, so the choice of counters available to you depends on the processor that you are using. The performance tools provide aliases for a number of counters that are likely to be in common use. You can obtain a list of available hardware counters on any particular system from the Collector by typing collect with no arguments in a terminal window on that system. If the processor and system support hardware counter profiling, the collect command prints two lists containing information about hardware counters. The first list contains "well-known" (aliased) hardware counters; the second list contains raw hardware counters.

Here is an example that shows the entries in the counter list. The counters that are considered well-known are displayed first in the list, followed by a list of the raw hardware counters. Each line of output in this example is formatted for print.

```
Well known HW counters available for profiling:
cycles[/{0|1}],9999991 ('CPU Cycles', alias for Cycle_cnt; CPU-cycles)
insts[/{0|1}],9999991 ('Instructions Executed', alias for Instr_cnt; events)
dcrm[/1],100003 ('D$ Read Misses', alias for DC_rd_miss; load events)
...
Raw HW counters available for profiling:
Cycle_cnt[/{0|1}],1000003 (CPU-cycles)
Instr_cnt[/{0|1}],1000003 (events)
DC rd[/0],1000003 (load events)
```

Format of the Well-Known Hardware Counter List

In the well-known hardware counter list, the first field (for example, cycles) gives the alias name that can be used in the -h *counter*... argument of the collect command. This alias name is also the identifier to use in the er_print command.

The second field lists the available registers for the counter; for example, [/{0|1}]. For well-known counters, the default value has been chosen to provide a reasonable sample rate. Because actual rates vary considerably, you might need to specify a non-default value.

The third field, for example, 9999991, is the default overflow value for the counter.

The fourth field, in parentheses, contains type information. It provides a short description (for example, CPU Cycles), the raw hardware counter name (for example, Cycle_cnt), and the type of units being counted (for example, CPU-cycles), which can include up to two words.

If the first word of type information is:

- load, store, or load-store, the counter is memory-related. You can prepend a + sign to the counter name (for example, +dcrm) in the collect -h command, to request a search for the precise instruction and virtual address that caused the event. The + sign also enables dataspace profiling; see "The DataObjects Tab" on page 88, "The DataLayout Tab" on page 89, and "The MemoryObjects Tabs" on page 91 for details.
- not-program-related, the counter captures events initiated by some other program, such as CPU-to-CPU cache snoops. Using the counter for profiling generates a warning and profiling does not record a call stack.

If the second or only word of the type information is:

- CPU-cycles, the counter can be used to provide a time-based metric. The metrics reported
 for such counters are converted by default to inclusive and exclusive times, but can
 optionally be shown as event counts.
- events, the metric is inclusive and exclusive event counts, and cannot be converted to a time.

In the well-known hardware counter list in the example, the type information contains one word, CPU-cycles for the first counter and events for the second counter. For the third counter, the type information contains two words, load events.

Format of the Raw Hardware Counter List

The information included in the raw hardware counter list is a subset of the information in the well-known hardware counter list. Each line includes the internal counter name as used by cpu-track(1), the register number(s) on which that counter can be used, the default overflow value, and the counter units, which can be either CPU-cycles or Events.

If the counter measures events unrelated to the program running, the first word of type information is not-program-related. For such a counter, profiling does not record a call stack, but instead shows the time being spent in an artificial function, collector not program related. Thread and LWP ID's are recorded, but are meaningless.

The default overflow value for raw counters is 1000003. This value is not ideal for most raw counters, so you should specify timeout values when specifying raw counters.

Synchronization Wait Tracing Data

In multithreaded programs, the synchronization of tasks performed by different threads can cause delays in execution of your program, because one thread might have to wait for access to data that has been locked by another thread, for example. These events are called synchronization delay events and are collected by tracing calls to the Solaris or pthread thread functions. The process of collecting and recording these events is called synchronization wait tracing. The time spent waiting for the lock is called the wait time. Currently, synchronization wait tracing is only available for systems running the Solaris OS.

Events are only recorded if their wait time exceeds a threshold value, which is given in microseconds. A threshold value of 0 means that all synchronization delay events are traced, regardless of wait time. The default threshold is determined by running a calibration test, in which calls are made to the threads library without any synchronization delay. The threshold is the average time for these calls multiplied by an arbitrary factor (currently 6). This procedure prevents the recording of events for which the wait times are due only to the call itself and not to a real delay. As a result, the amount of data is greatly reduced, but the count of synchronization events can be significantly underestimated.

Synchronization tracing for Java programs is based on events generated when a thread attempts to acquire a Java Monitor. Both machine and Java call stacks are collected for these events, but no synchronization tracing data is collected for internal locks used within the JavaTM Virtual Machine (JVM) software. In the machine representation, thread synchronization devolves into calls to _lwp_mutex_lock, and no synchronization data is shown, since these calls are not traced.

Synchronization wait tracing data is converted into the following metrics.

TABLE 2-2 Synchronization Wait Tracing Metrics

Metric	Definition
Synchronization delay events.	The number of calls to a synchronization routine where the wait time exceeded the prescribed threshold.
Synchronization wait time.	Total of wait times that exceeded the prescribed threshold.

From this information you can determine if functions or load objects are either frequently blocked, or experience unusually long wait times when they do make a call to a synchronization routine. High synchronization wait times indicate contention among threads. You can reduce the contention by redesigning your algorithms, particularly restructuring your locks so that they cover only the data for each thread that needs to be locked.

Heap Tracing (Memory Allocation) Data

Calls to memory allocation and deallocation functions that are not properly managed can be a source of inefficient data usage and can result in poor program performance. In heap tracing, the Collector traces memory allocation and deallocation requests by interposing on the C standard library memory allocation functions malloc, realloc, valloc, and memalign and the deallocation function free. Calls to mmap are treated as memory allocations, which allows heap tracing events for Java memory allocations to be recorded. The Fortran functions allocate and deallocate call the C standard library functions, so these routines are also traced indirectly.

Heap profiling for Java programs is not supported.

Heap tracing data is converted into the following metrics.

TABLE 2-3 Memory Allocation (Heap Tracing) Metrics

Metric	Definition	
Allocations	The number of calls to the memory allocation functions.	
Bytes allocated	The sum of the number of bytes allocated in each call to the memory allocation functions.	
Leaks	The number of calls to the memory allocation functions that did not have a corresponding call to a deallocation function.	
Bytes leaked	The number of bytes that were allocated but not deallocated.	

Collecting heap tracing data can help you identify memory leaks in your program or locate places where there is inefficient allocation of memory.

Another definition of memory leaks that is commonly used, such as in the dbx debugging tool, says a memory leak is a dynamically-allocated block of memory that has no pointers pointing to it anywhere in the data space of the program. The definition of leaks used here includes this alternative definition, but also includes memory for which pointers do exist.

MPI Tracing Data

The Collector can collect data on calls to the Message Passing Interface (MPI) library. Currently, MPI tracing is only available for system running the Solaris OS. The functions for which data is collected are listed below.

MPI_Allgather	MPI_Allgatherv	MPI_Allreduce
MPI_Alltoall	MPI_Alltoallv	MPI_Barrier
MPI_Bcast	MPI_Bsend	MPI_Gather
MPI_Gatherv	MPI_Irecv	MPI_Isend
MPI_Recv	MPI_Reduce	MPI_Reduce_scatter
MPI_Rsend	MPI_Scan	MPI_Scatter
MPI_Scatterv	MPI_Send	MPI_Sendrecv
MPI_Sendrecv_replace	MPI_Ssend	MPI_Wait
MPI_Waitall	MPI_Waitany	MPI_Waitsome
MPI_Win_fence	MPI_Win_lock	

MPI tracing data is converted into the following metrics.

TABLE 2-4 MPI Tracing Metrics

Metric	Definition
MPI Receives	Number of receive operations in MPI functions that receive data
MPI Bytes Received	Number of bytes received in MPI functions
MPI Sends	Number of send operations in MPI functions that send data
MPI Bytes Sent	Number of bytes sent in MPI functions
MPI Time	Time spent in all calls to MPI functions
Other MPI Calls	Number of calls to other MPI functions

The number of bytes recorded as received or sent is the buffer size given in the call. This number might be larger than the actual number of bytes received or sent. In the global communication functions and collective communication functions, the number of bytes sent or received is the maximum number, assuming direct interprocessor communication and no optimization of the data transfer or retransmission of the data.

The functions from the MPI library that are traced are listed in Table 2–5, categorized as MPI send functions, MPI receive functions, MPI send and receive functions, and other MPI functions.

TABLE 2-5 Classification of MPI Functions Into Send, Receive, Send and Receive, and Other

Category	Functions	
MPI send functions	${\tt MPI_Bsend}, {\tt MPI_Isend}, {\tt MPI_Rsend}, {\tt MPI_Send}, {\tt MPI_Ssend}$	
MPI receive functions	MPI_Irecv, MPI_Recv	
MPI send and receive functions	MPI_Allgather, MPI_Allgatherv, MPI_Allreduce, MPI_Alltoall, MPI_Alltoallv, MPI_Bcast, MPI_Gather, MPI_Gatherv, MPI_Reduce, MPI_Reduce_scatter, MPI_Scan, MPI_Scatter, MPI_Scatterv, MPI_Sendrecv_replace	
Other MPI functions	<pre>MPI_Barrier, MPI_Wait, MPI_Waitall, MPI_Waitany, MPI_Waitsome, MPI_Win_fence, MPI_Win_lock</pre>	

Collecting MPI tracing data can help you identify places where you have a performance problem in an MPI program that could be due to MPI calls. Examples of possible performance problems are load balancing, synchronization delays, and communications bottlenecks.

Global (Sampling) Data

Global data is recorded by the Collector in packets called sample packets. Each packet contains a header, a timestamp, execution statistics from the kernel such as page fault and I/O data, context switches, and a variety of page residency (working-set and paging) statistics. The data recorded in sample packets is global to the program and is not converted into performance metrics. The process of recording sample packets is called sampling.

Sample packets are recorded in the following circumstances:

- When the program stops for any reason in the Debugging window of the IDE or in dbx, such as at a breakpoint, if the option to do this is set
- At the end of a sampling interval, if you have selected periodic sampling. The sampling interval is specified as an integer in units of seconds. The default value is 1 second
- When you choose Debug → Performance Toolkit → Enable Collector and select the Periodic Samples checkbox in the Collector window

- When you use the dbx collector sample record command to manually record a sample
- At a call to collector_sample, if you have put calls to this routine in your code (see "Program Control of Data Collection" on page 44)
- When a specified signal is delivered, if you have used the -l option with the collect command (see the collect(1) man page)
- When collection is initiated and terminated
- When you pause collection with the dbx collector pause command (just before the pause) and when you resume collection with the dbx collector resume command (just after the resume)
- Before and after a descendant process is created

The performance tools use the data recorded in the sample packets to group the data into time periods, which are called samples. You can filter the event-specific data by selecting a set of samples, so that you see only information for these particular time periods. You can also view the global data for each sample.

The performance tools make no distinction between the different kinds of sample points. To make use of sample points for analysis you should choose only one kind of point to be recorded. In particular, if you want to record sample points that are related to the program structure or execution sequence, you should turn off periodic sampling, and use samples recorded when dbx stops the process, or when a signal is delivered to the process that is recording data using the collect command, or when a call is made to the Collector API functions.

How Metrics Are Assigned to Program Structure

Metrics are assigned to program instructions using the call stack that is recorded with the event-specific data. If the information is available, each instruction is mapped to a line of source code and the metrics assigned to that instruction are also assigned to the line of source code. See Chapter 7, "Understanding the Performance Analyzer and Its Data" for a more detailed explanation of how this is done.

In addition to source code and instructions, metrics are assigned to higher level objects: functions and load objects. The call stack contains information on the sequence of function calls made to arrive at the instruction address recorded when a profile was taken. The Performance Analyzer uses the call stack to compute metrics for each function in the program. These metrics are called function-level metrics.

Function-Level Metrics: Exclusive, Inclusive, and Attributed

The Performance Analyzer computes three types of function-level metrics: exclusive metrics, inclusive metrics and attributed metrics.

- Exclusive metrics for a function are calculated from events which occur inside the function itself: they exclude metrics coming from calls to other functions.
- Inclusive metrics are calculated from events which occur inside the function and any functions it calls: they include metrics coming from calls to other functions.
- Attributed metrics tell you how much of an inclusive metric came from calls from or to another function: they attribute metrics to another function.

For a function that only appears at the bottom of call stacks (a leaf function), the exclusive and inclusive metrics are the same.

Exclusive and inclusive metrics are also computed for load objects. Exclusive metrics for a load object are calculated by summing the function-level metrics over all functions in the load object. Inclusive metrics for load objects are calculated in the same way as for functions.

Exclusive and inclusive metrics for a function give information about all recorded paths through the function. Attributed metrics give information about particular paths through a function. They show how much of a metric came from a particular function call. The two functions involved in the call are described as a *caller* and a *callee*. For each function in the call tree:

- The attributed metrics for a function's callers tell you how much of the function's inclusive metric was due to calls from each caller. The attributed metrics for the callers sum to the function's inclusive metric.
- The attributed metrics for a function's callees tell you how much of the function's inclusive metric came from calls to each callee. Their sum plus the function's exclusive metric equals the function's inclusive metric.

The relationship between the metrics can be expressed by the following equation:

$$\sum_{\substack{\text{metric}\\\text{metric}}} \text{Attributed} = \lim_{\substack{\text{metric}\\\text{metric}}} = \left(\sum_{\substack{\text{metric}\\\text{metric}}} \text{Attributed} + \sup_{\substack{\text{Exclusive}\\\text{metric}}}\right)$$

Comparison of attributed and inclusive metrics for the caller or the callee gives further information:

- The difference between a caller's attributed metric and its inclusive metric tells you how
 much of the metric came from calls to other functions and from work in the caller itself.
- The difference between a callee's attributed metric and its inclusive metric tells you how much of the callee's inclusive metric came from calls to it from other functions.

To locate places where you could improve the performance of your program:

- Use exclusive metrics to locate functions that have high metric values.
- Use inclusive metrics to determine which call sequence in your program was responsible for high metric values.

• Use attributed metrics to trace a particular call sequence to the function or functions that are responsible for high metric values.

Interpreting Attributed Metrics: An Example

Exclusive, inclusive and attributed metrics are illustrated in Figure 2–1, which contains a complete call tree. The focus is on the central function, function C.

Pseudo-code of the program is shown after the diagram.

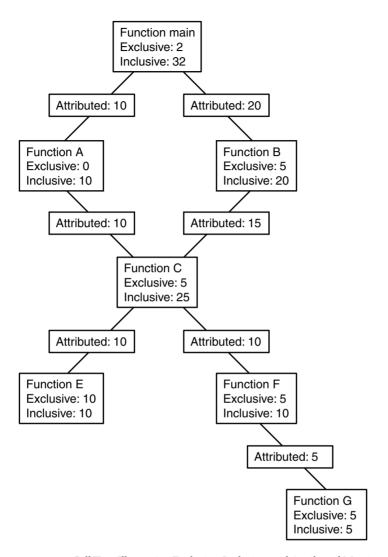


FIGURE 2-1 Call Tree Illustrating Exclusive, Inclusive, and Attributed Metrics

The Main function calls Function A and Function B, and attributes 10 units of its inclusive metric to Function A and 20 units to function B. These are the callee attributed metrics for function Main. Their sum (10+20) added to the exclusive metric of function Main equals the inclusive metric of function main (32).

Function A spends all of its time in the call to function C, so it has 0 units of exclusive metrics.

Function C is called by two functions: function A and function B, and attributes 10 units of its inclusive metric to function A and 15 units to function B. These are the caller attributed metrics. Their sum (10+15) equals the inclusive metric of function C (25)

The caller attributed metric is equal to the difference between the inclusive and exclusive metrics for function A and B, which means they each call only function C. (In fact, the functions might call other functions but the time is so small that it does not appear in the experiment.)

Function C calls two functions, function E and function F, and attributes 10 units of its inclusive metric to function E and 10 units to function F. These are the callee attributed metrics. Their sum (10+10) added to the exclusive metric of function C (5) equals the inclusive metric of function C (25).

The callee attributed metric and the callee inclusive metric are the same for function E and for function F. This means that both function E and function F are only called by function C. The exclusive metric and the inclusive metric are the same for function E but different for function F. This is because function F calls another function, Function G, but function E does not.

Pseudo-code for this program is shown below.

```
main() {
   A():
   /Do 2 units of work;/
   B():
}
A() {
   C(10);
B() {
   C(7.5);
   /Do 5 units of work:/
   C(7.5);
}
C(arg) {
      /Do a total of "arg" units of work, with 20% done in C itself,
      40% done by calling E, and 40% done by calling F./
}
```

How Recursion Affects Function-Level Metrics

Recursive function calls, whether direct or indirect, complicate the calculation of metrics. The Performance Analyzer displays metrics for a function as a whole, not for each invocation of a function: the metrics for a series of recursive calls must therefore be compressed into a single

metric. This does not affect exclusive metrics, which are calculated from the function at the bottom of the call stack (the leaf function), but it does affect inclusive and attributed metrics.

Inclusive metrics are computed by adding the metric for the event to the inclusive metric of the functions in the call stack. To ensure that the metric is not counted multiple times in a recursive call stack, the metric for the event is only added to the inclusive metric for each unique function.

Attributed metrics are computed from inclusive metrics. In the simplest case of recursion, a recursive function has two callers: itself and another function (the initiating function). If all the work is done in the final call, the inclusive metric for the recursive function is attributed to itself and not to the initiating function. This attribution occurs because the inclusive metric for all the higher invocations of the recursive function is regarded as zero to avoid multiple counting of the metric. The initiating function, however, correctly attributes to the recursive function as a callee the portion of its inclusive metric due to the recursive call.



Collecting Performance Data

The first stage of performance analysis is data collection. This chapter describes what is required for data collection, where the data is stored, how to collect data, and how to manage the data collection. For more information about the data itself, see Chapter 2, "Performance Data."

This chapter covers the following topics.

- "Compiling and Linking Your Program" on page 39
- "Preparing Your Program for Data Collection and Analysis" on page 41
- "Limitations on Data Collection" on page 48
- "Where the Data Is Stored" on page 51
- "Estimating Storage Requirements" on page 53
- "Collecting Data" on page 54
- "Collecting Data Using the collect Command" on page 55
- "Collecting Data Using the dbx collector Subcommands" on page 66
- "Collecting Data From a Running Process With dbx" on page 72
- "Collecting Data From MPI Programs" on page 74
- "Using collect With ppgsz" on page 78

Compiling and Linking Your Program

You can collect and analyze data for a program compiled with almost any option, but some choices affect what you can collect or what you can see in the Performance Analyzer. The issues that you should take into account when you compile and link your program are described in the following subsections.

Source Code Information

To see source code in annotated Source and Disassembly analyses, and source lines in the Lines analyses, you must compile the source files of interest with the -g compiler option (-g0 for C++

to enable front-end inlining) to generate debug symbol information. The format of the debug symbol information can be either DWARF2 or stabs, as specified by -xdebugformat=(dwarf|stabs). The default debug format is dwarf.

To prepare compilation objects with debug information that allows dataspace profiles, currently only for SPARC® processors, compile by specifying -xhwcprof -xdebugformat=dwarf and any level of optimization. (Currently, this functionality is not available without optimization.) To see program data objects in Data Objects analyses, also add -g (or -g0 for C++) to obtain full symbolic information.

Executables and libraries built with DWARF format debugging symbols automatically include a copy of each constituent object file's debugging symbols. Executables and libraries built with stabs format debugging symbols also include a copy of each constituent object file's debugging symbols if they are linked with the -xs option, which leaves stabs symbols in the various object files as well as the executable. The inclusion of this information is particularly useful if you need to move or remove the object files. With all of the debugging symbols in the executables and libraries themselves, it is easier to move the experiment and the program-related files to a new location.

Static Linking

When you compile your program, you must not disable dynamic linking, which is done with the -dn and -Bstatic compiler options. If you try to collect data for a program that is entirely statically linked, the Collector prints an error message and does not collect data. The error occurs because the collector library, among others, is dynamically loaded when you run the Collector.

Do not statically link any of the system libraries. If you do, you might not be able to collect any kind of tracing data. Also, do not link to the Collector library, libcollector.so.

Optimization at Compile Time

If you compile your program with optimization turned on at some level, the compiler can rearrange the order of execution so that it does not strictly follow the sequence of lines in your program. The Performance Analyzer can analyze experiments collected on optimized code, but the data it presents at the disassembly level is often difficult to relate to the original source code lines. In addition, the call sequence can appear to be different from what you expect if the compiler performs tail-call optimizations. See "Tail-Call Optimization" on page 149 for more information.

Compiling Java Programs

No special action is required for compiling Java programs with the javac command.

Preparing Your Program for Data Collection and Analysis

You do not need to do anything special to prepare most programs for data collection and analysis. You should read one or more of the subsections below if your program does any of the following:

- Installs a signal handler
- Explicitly dynamically loads a system library
- Dynamically compiles functions
- Creates descendant processes that you want to profile
- Uses the asynchronous I/O library
- Uses the profiling timer or hardware counter API directly
- Calls setuid(2) or executes a setuid file

Also, if you want to control data collection from your program, you should read the relevant subsection.

Using Dynamically Allocated Memory

Many programs rely on dynamically-allocated memory, using features such as:

- malloc, valloc, alloca (C/C++)
- new (C++)
- stack local variables (Fortran)
- MALLOC, MALLOC64 (Fortran)

You must take care to ensure that a program does not rely on the initial contents of dynamically allocated memory, unless the memory allocation method is explicitly documented as setting an initial value: for example, compare the descriptions of calloc and malloc in the man page for malloc(3C).

Occasionally, a program that uses dynamically-allocated memory might appear to work correctly when run alone, but might fail when run with performance data collection enabled. Symptoms might include unexpected floating point behavior, segmentation faults, or application-specific error messages.

Such behavior might occur if the uninitialized memory is, by chance, set to a benign value when the application is run alone, but is set to a different value when the application is run in conjunction with the performance data collection tools. In such cases, the performance tools are not at fault. Any application that relies on the contents of dynamically allocated memory has a latent bug: an operating system is at liberty to provide any content whatsoever in dynamically allocated memory, unless explicitly documented otherwise. Even if an operating system happens to always set dynamically allocated memory to a certain value today, such latent bugs might cause unexpected behavior with a later revision of the operating system, or if the program is ported to a different operating system in the future.

The following tools may help in finding such latent bugs:

- f95 -xcheck=init_local
 For more information, see the Fortran User's Guide or the f95(1) man page
- lint utility
 For more information, see the C User's Guide or the lint(1) man page
- Runtime checking under dbx
 For more information, see the *Debugging a Program With* dbx manual or the dbx(1) man page.
- Rational Purify

Using System Libraries

The Collector interposes on functions from various system libraries, to collect tracing data and to ensure the integrity of data collection. The following list describes situations in which the Collector interposes on calls to library functions.

- Collecting synchronization wait tracing data. The Collector interposes on functions from the Solaris threads library, libthread. so on the Solaris 9 OS, and from the Solaris C library, libc. so, on the Solaris 10 OS.
- Collecting heap tracing data. The Collector interposes on the functions malloc, realloc, memalign and free. Versions of these functions are found in the C standard library, libc.so and also in other libraries such as libmalloc.so and libmtmalloc.so.
- Collecting MPI tracing data. The Collector interposes on functions from the Solaris MPI library, libmpi.so.
- Ensuring the integrity of clock data. The Collector interposes on setitimer and prevents the program from using the profiling timer.
- Ensuring the integrity of hardware counter data. The Collector interposes on functions from the hardware counter library, libcpc.so and prevents the program from using the counters. Calls from the program to functions from this library return a value of -1.
- Enabling data collection on descendant processes. The Collector interposes on the functions fork(2), fork1(2), vfork(2), fork(3F), system(3C), system(3F), sh(3F), popen(3C), and exec(2) and its variants. Calls to vfork are replaced internally by calls to fork1. These interpositions are only done for the collect command.
- Guaranteeing the handling of the SIGPROF and SIGEMT signals by the Collector. The
 Collector interposes on sigaction to ensure that its signal handler is the primary signal
 handler for these signals.

Under some circumstances the interposition does not succeed:

- Statically linking a program with any of the libraries that contain functions that are interposed.
- Attaching dbx to a running application that does not have the collector library preloaded.
- Dynamically loading one of these libraries and resolving the symbols by searching only within the library.

The failure of interposition by the Collector can cause loss or invalidation of performance data.

Using Signal Handlers

The Collector uses two signals to collect profiling data: SIGPROF for all experiments and SIGEMT for hardware counter experiments only. The Collector installs a signal handler for each of these signals. The signal handler intercepts and processes its own signal, but passes other signals on to any other signal handlers that are installed. If a program installs its own signal handler for these signals, the Collector reinstalls its signal handler as the primary handler to guarantee the integrity of the performance data.

The collect command can also use user-specified signals for pausing and resuming data collection and for recording samples. These signals are not protected by the Collector although a warning is written to the experiment if a user handler is installed. It is your responsibility to ensure that there is no conflict between use of the specified signals by the Collector and any use made by the application of the same signals.

The signal handlers installed by the Collector set a flag that ensures that system calls are not interrupted for signal delivery. This flag setting could change the behavior of the program if the program's signal handler sets the flag to permit interruption of system calls. One important example of a change in behavior occurs for the asynchronous I/O library, libaio.so, which uses SIGPROF for asynchronous cancel operations, and which does interrupt system calls. If the collector library, libcollector.so, is installed, the cancel signal invariably arrives too late to cancel the asynchronous I/O operation.

If you attach dbx to a process without preloading the collector library and enable performance data collection, and the program subsequently installs its own signal handler, the Collector does not reinstall its own signal handler. In this case, the program's signal handler must ensure that the SIGPROF and SIGEMT signals are passed on so that performance data is not lost. If the program's signal handler interrupts system calls, both the program behavior and the profiling behavior are different from when the collector library is preloaded.

Using setuid

Restrictions enforced by the dynamic loader make it difficult to use setuid(2) and collect performance data. If your program calls setuid or executes a setuid file, it is likely that the Collector cannot write an experiment file because it lacks the necessary permissions for the new user ID.

You can work around this issue by ensuring that your umask is set to give write permission to any UIDs or GIDs that the process may run under. The ids must have write permission for the experiments.

Program Control of Data Collection

If you want to control data collection from your program, the Collector shared library, libcollector. so contains some API functions that you can use. The functions are written in C. A Fortran interface is also provided. Both C and Fortran interfaces are defined in header files that are provided with the library.

The API functions are defined as follows.

```
void collector_sample(char *name);
void collector_pause(void);
void collector_resume(void);
void collector_thread_pause(unsigned int t);
void collector_thread_resume(unsigned int t);
void collector_terminate_expt(void);
```

Similar functionality is provided for JavaTM programs by the CollectorAPI class, which is described in "The Java Interface" on page 45.

The C and C++ Interface

There are two ways to access the C and C++ interface:

- One way is to include collectorAPI.h and link with -lcollectorAPI, which contains real
 functions to check for the existence of the underlying libcollector.so API functions.
 - This way requires that you link with an API library, and works under all circumstances. If no experiment is active, the API calls are ignored.
- The second way is to include libcollector.h, which contains macros that check for the existence of the underlying libcollector.so API functions.
 - This way works when used in the main executable, and when data collection is started at the same time the program starts. This way does not always work when dbx is used to attach to the process, nor when used from within a shared library that is dlopen'd by the process. This second way is provided for backward compatibility *only*, and its use is discouraged for any other purpose.

Note – Do not link a program in any language with -lcollector. If you do, the Collector can exhibit unpredictable behavior.

The Fortran Interface

The Fortran API libfcollector.h file defines the Fortran interface to the library. The application must be linked with -lcollectorAPI to use this library. (An alternate name for the library, -lfcollector, is provided for backward compatibility.) The Fortran API provides the same features as the C and C++ API, excluding the dynamic function and thread pause and resume calls.

Insert the following statement to use the API functions for Fortran:

```
include "libfcollector.h"
```

Note – Do not link a program in any language with -lcollector. If you do, the Collector can exhibit unpredictable behavior.

The Java Interface

Use the following statement to import the CollectorAPI class and access the Java API. Note however that your application must be invoked with a classpath pointing to / installation_directory/lib/collector.jar where installation-directory is the directory in which the Sun Studio software is installed.

```
import com.sun.forte.st.collector.CollectorAPI;
```

The Java Collector API methods are defined as follows:

```
CollectorAPI.sample(String name)
CollectorAPI.pause()
CollectorAPI.resume()
CollectorAPI.threadPause(Thread thread)
CollectorAPI.threadResume(Thread thread)
CollectorAPI.terminate()
```

The Java API includes the same functions as the C and C++ API, excluding the dynamic function API.

The C include file libcollector.h contains macros that bypass the calls to the real API functions if data is not being collected. In this case the functions are not dynamically loaded. However, using these macros is risky because the macros do not work well under some circumstances. It is safer to use collectorAPI.h because it does not use macros. Rather, it refers directly to the functions.

The Fortran API subroutines call the C API functions if performance data is being collected, otherwise they return. The overhead for the checking is very small and should not significantly affect program performance.

To collect performance data you must run your program using the Collector, as described later in this chapter. Inserting calls to the API functions does not enable data collection.

If you intend to use the API functions in a multithreaded program, you should ensure that they are only called by one thread. With the exception of collector_thread_pause() and collector_thread_resume(), the API functions perform actions that apply to the process and not to individual threads. If each thread calls the API functions, the data that is recorded might not be what you expect. For example, if collector_pause() or collector_terminate_expt() is called by one thread before the other threads have reached the same point in the program, collection is paused or terminated for all threads, and data can be lost from the threads that were executing code before the API call. To control data collection at the level of the individual threads, use the collector_thread_pause() and collector_thread_resume() functions. There are two viable ways of using these functions: by having one master thread make all the calls for all threads, including itself; or by having each thread make calls only for itself. Any other usage can lead to unpredictable results.

The C, C++, Fortran, and Java API Functions

The descriptions of the API functions follow.

■ C and C++: collector sample(char *name)

Fortran: collector sample(string name)

Java: CollectorAPI.sample(String name)

Record a sample packet and label the sample with the given name or string. The label is displayed by the Performance Analyzer in the Event tab. The Fortran argument string is of type character.

Sample points contain data for the process and not for individual threads. In a multithreaded application, the collector_sample() API function ensures that only one sample is written if another call is made while it is recording a sample. The number of samples recorded can be less than the number of threads making the call.

The Performance Analyzer does not distinguish between samples recorded by different mechanisms. If you want to see only the samples recorded by API calls, you should turn off all other sampling modes when you record performance data.

■ C, C++, Fortran: collector pause()

Java: CollectorAPI.pause()

Stop writing event-specific data to the experiment. The experiment remains open, and global data continues to be written. The call is ignored if no experiment is active or if data recording is already stopped. This function stops the writing of all event-specific data even if it is enabled for specific threads by the collector thread resume() function.

■ C, C++, Fortran: collector resume()

Java: CollectorAPI.resume()

Resume writing event-specific data to the experiment after a call to collector_pause(). The call is ignored if no experiment is active or if data recording is active.

■ C and C++ only: collector thread pause(unsigned int t)

```
Java: CollectorAPI.threadPause(Thread t)
```

Stop writing event-specific data from the thread specified in the argument list to the experiment. The argument t is the POSIX thread identifier for C/C++ programs and a Java thread for Java programs. If the experiment is already terminated, or no experiment is active, or writing of data for that thread is already turned off, the call is ignored. This function stops the writing of data from the specified thread even if the writing of data is globally enabled. By default, recording of data for individual threads is turned on.

C and C++ only: collector thread resume(unsigned int t)

```
Java: CollectorAPI.threadResume(Thread t)
```

Resume writing event-specific data from the thread specified in the argument list to the experiment. The argument t is the POSIX thread identifier for C/C++ programs and a Java thread for Java programs. If the experiment is already terminated, or no experiment is active, or writing of data for that thread is already turned on, the call is ignored. Data is written to the experiment only if the writing of data is globally enabled as well as enabled for the thread.

■ C, C++, Fortran: collector terminate expt()

```
Java: CollectorAPI. terminate
```

Terminate the experiment whose data is being collected. No further data is collected, but the program continues to run normally. The call is ignored if no experiment is active.

Dynamic Functions and Modules

If your C or C++ program dynamically compiles functions into the data space of the program, you must supply information to the Collector if you want to see data for the dynamic function or module in the Performance Analyzer. The information is passed by calls to collector API functions. The definitions of the API functions are as follows.

You do not need to use these API functions for Java methods that are compiled by the Java HotSpot[™] virtual machine, for which a different interface is used. The Java interface provides the name of the method that was compiled to the Collector. You can see function data and annotated disassembly listings for Java compiled methods, but not annotated source listings.

The descriptions of the API functions follow.

collector func load()

Pass information about dynamically compiled functions to the Collector for recording in the experiment. The parameter list is described in the following table.

TABLE 3-1 Parameter List for collector func load()

Parameter	Definition
name	The name of the dynamically compiled function that is used by the performance tools. The name does not have to be the actual name of the function. The name need not follow any of the normal naming conventions of functions, although it should not contain embedded blanks or embedded quote characters.
alias	An arbitrary string used to describe the function. It can be NULL. It is not interpreted in any way, and can contain embedded blanks. It is displayed in the Summary tab of the Analyzer. It can be used to indicate what the function is, or why the function was dynamically constructed.
sourcename	The path to the source file from which the function was constructed. It can be NULL. The source file is used for annotated source listings.
vaddr	The address at which the function was loaded.
size	The size of the function in bytes.
lntsize	A count of the number of entries in the line number table. It should be zero if line number information is not provided.
lntable	A table containing lntsize entries, each of which is a pair of integers. The first integer is an offset, and the second entry is a line number. All instructions between an offset in one entry and the offset given in the next entry are attributed to the line number given in the first entry. Offsets must be in increasing numeric order, but the order of line numbers is arbitrary. If lntable is NULL, no source listings of the function are possible, although disassembly listings are available.

collector_func_unload()

Inform the collector that the dynamic function at the address vaddr has been unloaded.

Limitations on Data Collection

This section describes the limitations on data collection that are imposed by the hardware, the operating system, the way you run your program, or by the Collector itself.

There are no limitations on simultaneous collection of different data types: you can collect any data type with any other data type.

Limitations on Clock-Based Profiling

The minimum value of the profiling interval and the resolution of the clock used for profiling depend on the particular operating environment. The maximum value is set to 1 second. The value of the profiling interval is rounded down to the nearest multiple of the clock resolution. The minimum and maximum value and the clock resolution can be found by typing the collect command with no arguments.

Runtime Distortion and Dilation with Clock-profiling

Clock-based profiling records data when a SIGPROF signal is delivered to the target. It causes dilation to process that signal, and unwind the call stack. The deeper the call stack, and the more frequent the signals, the greater the dilation. To a limited extent, clock-based profiling shows some distortion, deriving from greater dilation for those parts of the program executing with the deepest stacks.

Where possible, a default value is set not to an exact number of milliseconds, but to slightly more or less than an exact number (for example, 10.007 ms or 0.997 ms) to avoid correlations with the system clock, which can also distort the data. Set custom values the same way on SPARC platforms (not possible on Linux platforms).

Limitations on Collection of Tracing Data

You cannot collect any kind of tracing data from a program that is already running unless the Collector library, libcollector.so, had been preloaded. See "Collecting Tracing Data From a Running Program" on page 73 for more information.

Runtime Distortion and Dilation with Tracing

Tracing data dilates the run in proportion to the number of events that are traced. If done with clock-based profiling, the clock data is distorted by the dilation induced by tracing events.

Limitations on Hardware Counter Overflow Profiling

Hardware counter overflow profiling has several limitations:

- You can only collect hardware counter overflow data on processors that have hardware counters and that support overflow profiling. On other systems, hardware counter overflow profiling is disabled. UltraSPARC® processors prior to the UltraSPARC III processor family do not support hardware counter overflow profiling.
- You cannot collect hardware counter overflow data on a system while cpustat(1) is running, because cpustat takes control of the counters and does not let a user process use the counters. If cpustat is started during data collection, the hardware counter overflow profiling is terminated and an error is recorded in the experiment.

- You cannot use the hardware counters in your own code with the libcpc(3) API if you are doing hardware counter overflow profiling. The Collector interposes on the libcpc library functions and returns with a return value of -1 if the call did not come from the Collector. Your program should be coded so as to work correctly if it fails to get access to the hardware counters. If not coded to handle this, the program will fail under hardware counter profiling, or if the root invokes system-wide tools that also use the counters.
- If you try to collect hardware counter data on a running program that is using the hardware counter library by attaching dbx to the process, the experiment may be corrupted.

Note – To view a list of all available counters, run the collect command with no arguments.

Runtime Distortion and Dilation With Hardware Counter Overflow Profiling

Hardware counter overflow profiling records data when a SIGEMT is delivered to the target. It causes dilation to process that signal, and unwind the call stack. Unlike clock-based profiling, for some hardware counters, different parts of the program might generate events more rapidly than other parts, and show dilation in that part of the code. Any part of the program that generates such events very rapidly might be significantly distorted. Similarly, some events might be generated in one thread disproportionately to the other threads.

Limitations on Data Collection for Descendant Processes

You can collect data on descendant processes subject to some limitations.

If you want to collect data for all descendant processes that are followed by the Collector, you must use the collect command with the one of the following options:

- -F on option enables you to collect data automatically for calls to fork and its variants and exec and its variants.
- -Fall option causes the Collector to follow all descendant processes, including those due to calls to system, popen, and sh.
- F'=*regexp*' option enables data to be collected on all descendant processes whose name or lineage matches the specified regular expression.

See "Experiment Control Options" on page 59 for more information about the -F option.

Limitations on Java Profiling

You can collect data on Java programs subject to the following limitations:

- You should use a version of the Java 2 Platform, Standard Edition (J2SE) no earlier than 1.5.0_03. By default, the collect command uses the path where the J2SE was installed by the Sun Studio installer, if any. You can override this default path by setting either the JDK_HOME environment variable or the JAVA_PATH environment variable. The Collector verifies that the version of java it finds in these environment variables is an ELF executable, and if it is not, an error message is printed, indicating which environment variable was used, and the full path name that was tried.
- You must use the collect command to collect data. You cannot use the dbx collector subcommands or the data collection capabilities of the IDE.
- Applications that create descendant processes that run JVM software cannot be profiled.
- If you want to use the 64-bit JVM software, you must use the -j on flag and specify the 64-bit JVM software as the target. Do not use java -d64 to collect data using the 64-bit JVM software. If you do so, no data is collected.

Runtime Performance Distortion and Dilation for Applications Written in the Java Programming Language

Java profiling uses the Java Virtual Machine Tools Interface (JVMTI), which can cause some distortion and dilation of the run.

For clock-based profiling and hardware counter overflow profiling, the data collection process makes various calls into the JVM software, and handles profiling events in signal handlers. The overhead of these routines, and the cost of writing the experiments to disk will dilate the runtime of the Java program. Such dilation is typically less than 10%.

For synchronization tracing, data collection uses other JVMTI events, which causes dilation in proportion to the amount of monitor contention in the application.

Where the Data Is Stored

The data collected during one execution of your application is called an experiment. The experiment consists of a set of files that are stored in a directory. The name of the experiment is the name of the directory.

In addition to recording the experiment data, the Collector creates its own archives of the load objects used by the program. These archives contain the addresses, sizes and names of each object file and each function in the load object, as well as the address of the load object and a time stamp for its last modification.

Experiments are stored by default in the current directory. If this directory is on a networked file system, storing the data takes longer than on a local file system, and can distort the

performance data. You should always try to record experiments on a local file system if possible. You can specify the storage location when you run the Collector.

Experiments for descendant processes are stored inside the experiment for the founder process.

Experiment Names

The default name for a new experiment is test.1.er. The suffix .er is mandatory: if you give a name that does not have it, an error message is displayed and the name is not accepted.

If you choose a name with the format *experiment.n.*er, where *n* is a positive integer, the Collector automatically increments *n* by one in the names of subsequent experiments—for example, mytest.l.er is followed by mytest.l.er, mytest.l.er, and so on. The Collector also increments *n* if the experiment already exists, and continues to increment *n* until it finds an experiment name that is not in use. If the experiment name does not contain *n* and the experiment exists, the Collector prints an error message.

Experiments can be collected into groups. The group is defined in an experiment group file, which is stored by default in the current directory. The experiment group file is a plain text file with a special header line and an experiment name on each subsequent line. The default name for an experiment group file is test.erg. If the name does not end in .erg, an error is displayed and the name is not accepted. Once you have created an experiment group, any experiments you run with that group name are added to the group.

You can manually create an experiment group file by creating a plain text file whose first line is

#analyzer experiment group

and adding the names of the experiments on subsequent lines. The name of the file must end in . erg.

You can also create an experiment group by using the -g argument to the collect command.

The default experiment name is different for experiments collected from MPI programs, which create one experiment for each MPI process. The default experiment name is test.m.er, where m is the MPI rank of the process. If you specify an experiment group group.erg, the default experiment name is group.m.er. If you specify an experiment name, you override these defaults. See "Collecting Data From MPI Programs" on page 74 for more information.

Experiments for descendant processes are named with their lineage as follows. To form the experiment name for a descendant process, an underscore, a code letter and a number are added to the stem of its creator's experiment name. The code letter is f for a fork, x for an exec, and c for combination. The number is the index of the fork or exec (whether successful or not). For example, if the experiment name for the founder process is test.l.er, the experiment for the child process created by the third call to fork is test.l.er/_f3.er. If that child process calls exec successfully, the experiment name for the new descendant process is test.l.er/ f3 xl.er.

Moving Experiments

If you want to move an experiment to another computer to analyze it, you should be aware of the dependencies of the analysis on the operating environment in which the experiment was recorded.

The archive files contain all the information necessary to compute metrics at the function level and to display the timeline. However, if you want to see annotated source code or annotated disassembly code, you must have access to versions of the load objects or source files that are identical to the ones used when the experiment was recorded.

The Performance Analyzer searches for the source, object and executable files in the following locations in turn, and stops when it finds a file of the correct basename:

- The archive directories of experiments.
- The current working directory.
- The absolute pathname as recorded in the executables or compilation objects.

You can change the search order or add other search directories from the Analyzer GUI or by using the setpath and addpath directives.

To ensure that you see the correct annotated source code and annotated disassembly code for your program, you can copy the source code, the object files and the executable into the experiment before you move or copy the experiment. If you don't want to copy the object files, you can link your program with -xs to ensure that the information on source lines and file locations are inserted into the executable. You can automatically copy the load objects into the experiment using the -A option of the collect command or the dbx collector archive command.

Estimating Storage Requirements

This section gives some guidelines for estimating the amount of disk space needed to record an experiment. The size of the experiment depends directly on the size of the data packets and the rate at which they are recorded, the number of LWPs used by the program, and the execution time of the program.

The data packets contain event-specific data and data that depends on the program structure (the call stack). The amount of data that depends on the data type is approximately 50 to 100 bytes. The call stack data consists of return addresses for each call, and contains 4 bytes per address, or 8 bytes per address on 64 bit executables. Data packets are recorded for each LWP in the experiment. Note that for Java programs, there are two call stacks of interest: the Java call stack and the machine call stack, which therefore result in more data being written to disk.

The rate at which profiling data packets are recorded is controlled by the profiling interval for clock data and by the overflow value for hardware counter data. However, the choice of these parameters also affects the data quality and the distortion of program performance due to the

data collection overhead. Smaller values of these parameters give better statistics but also increase the overhead. The default values of the profiling interval and the overflow value have been carefully chosen as a compromise between obtaining good statistics and minimizing the overhead. Smaller values also mean more data.

For a clock-based profiling experiment with a profiling interval of 10ms and a small call stack, such that the packet size is 100 bytes, data is recorded at a rate of 10 kbytes/sec per LWP. For a hardware counter overflow profiling experiment collecting data for CPU cycles and instructions executed on a 750MHz processor with an overflow value of 1000000 and a packet size of 100 bytes, data is recorded at a rate of 150 kbytes/sec per LWP. Applications that have call stacks with a depth of hundreds of calls could easily record data at ten times these rates.

Your estimate of the size of the experiment should also take into account the disk space used by the archive files, which is usually a small fraction of the total disk space requirement (see the previous section). If you are not sure how much space you need, try running your experiment for a short time. From this test you can obtain the size of the archive files, which are independent of the data collection time, and scale the size of the profile files to obtain an estimate of the size for the full-length experiment.

As well as allocating disk space, the Collector allocates buffers in memory to store the profile data before writing it to disk. Currently no way exists to specify the size of these buffers. If the Collector runs out of memory, try to reduce the amount of data collected.

If your estimate of the space required to store the experiment is larger than the space you have available, consider collecting data for part of the run rather than the whole run. You can collect data on part of the run with the collect command, with the dbx collector subcommands, or by inserting calls in your program to the collector API. You can also limit the total amount of profiling and tracing data collected with the collect command or with the dbx collector subcommands.

Note – The Performance Analyzer cannot read more than 2 GB of performance data.

Collecting Data

You can collect performance data in either the standalone Performance Analyzer or the Analyzer window in the IDE in several ways:

- Using the collect command from the command line (see "Collecting Data Using the collect Command" on page 55 and the collect(1) man page). The collect command-line tool has smaller data collection overheads than dbx so this method can be superior to the others.
- Using the Performance Tools Collect dialog in the Performance Analyzer (see "Collecting Performance Data Using the Performance Tools Collector" in the Performance Analyzer online help).

- Using the Collector dialog in the Debugger (see "Collecting Performance Data Using the Debugger" in the Performance Analyzer online help).
- Using the collector command from the dbx command line (see "Collecting Data Using the dbx collector Subcommands" on page 66 and "collector Command" in the Debugging online help in the IDE).

The following data collection capabilities are available only with the Performance Tools Collect dialog and the collect command:

- Collecting data on Java programs. If you try to collect data on a Java program with Collector
 Dialog in the Debugger in the IDE or with the collector command in dbx, the information
 that is collected is for the JVM software, not the Java program.
- Collecting data automatically on descendant processes.

Collecting Data Using the collect Command

To run the Collector from the command line using the collect command, type the following.

% collect collect-options program program-arguments

Here, *collect-options* are the collect command options, *program* is the name of the program you want to collect data on, and *program-arguments* are the program's arguments.

If no *collect-options* are given, the default is to turn on clock-based profiling with a profiling interval of approximately 10 milliseconds.

To obtain a list of options and a list of the names of any hardware counters that are available for profiling, type the collect command with no arguments.

% collect

For a description of the list of hardware counters, see "Hardware Counter Overflow Profiling Data" on page 26. See also "Limitations on Hardware Counter Overflow Profiling" on page 49.

Data Collection Options

These options control the types of data that are collected. See "What Data the Collector Collects" on page 24 for a description of the data types.

If you do not specify data collection options, the default is -p on, which enables clock-based profiling with the default profiling interval of approximately 10 milliseconds. The default is turned off by the -h option but not by any of the other data collection options.

If you explicitly disable clock-based profiling, and do not enable tracing or hardware counter overflow profiling, the collect command prints a warning message, and collects global data only.

-poption

Collect clock-based profiling data. The allowed values of *option* are:

- off-Turn off clock-based profiling.
- on- Turn on clock-based profiling with the default profiling interval of approximately 10
 milliseconds.
- lo[w] Turn on clock-based profiling with the low-resolution profiling interval of approximately 100 milliseconds.
- hi[gh] Turn on clock-based profiling with the high-resolution profiling interval of approximately 1 millisecond. See "Limitations on Clock-Based Profiling" on page 49 for information on enabling high-resolution profiling.
- [+] value Turn on clock-based profiling and set the profiling interval to value. The default units for value are milliseconds. You can specify value as an integer or a floating-point number. The numeric value can optionally be followed by the suffix m to select millisecond units or u to select microsecond units. The value should be a multiple of the clock resolution. If it is larger but not a multiple it is rounded down. If it is smaller, a warning message is printed and it is set to the clock resolution.

On SPARC platforms, any value may be prepended with a + sign to enable clock-based dataspace profiling, as is done for hardware counter profiling.

Collecting clock-based profiling data is the default action of the collect command.

-h counter_definition_1 . . . [, counter_definition_n]

Collect hardware counter overflow profiling data. The number of counter definitions is processor-dependent. This option is now available on systems running the Linux operating system if you have installed the perfctr patch, which you can download from http://user.it.uu.se/~mikpe/linux/perfctr/2.6/perfctr-2.6.15.tar.gz.

A counter definition can take one of the following forms, depending on whether the processor supports attributes for hardware counters.

```
[+]counter_name[/ register_number][,interval]

[+]counter_name[~ attribute_1=value_1]...[~attribute_n =value_n][/ register_number][,interval]
```

The processor-specific *counter_name* can be one of the following:

A well-known (aliased) counter name

A raw (internal) name, as used by cputrack(1). If the counter can use either event register, the event register to be used can be specified by appending /0 or /1 to the internal name.

If you specify more than one counter, they must use different registers. If they do not use different registers, the collect command prints an error message and exits. Some counters can count on either register.

To obtain a list of available counters, type collect with no arguments in a terminal window. A description of the counter list is given in the section "Hardware Counter Lists" on page 27.

If the hardware counter counts events that relate to memory access, you can prefix the counter name with a + sign to turn on searching for the true program counter address (PC) of the instruction that caused the counter overflow. This backtracking works on SPARC processors, and only with counters of type load, store, or load-store. If the search is successful, the virtual PC, the physical PC, and the effective address that was referenced are stored in the event data packet.

On some processors, attribute options can be associated with a hardware counter. If a processor supports attribute options, then running the collect command with no arguments lists the counter definitions including the attribute names. You can specify attribute values in decimal or hexadecimal format.

The interval (overflow value) is the number of events counted at which the hardware counter overflows and the overflow event is recorded. The interval can be set to one of the following:

- on, or a null string
 — The default overflow value, which you can determine by typing collect with no arguments.
- hi[gh] The high-resolution value for the chosen counter, which is approximately ten times shorter than the default overflow value. The abbreviation h is also supported for compatibility with previous software releases.
- lo[w] The low-resolution value for the chosen counter, which is approximately ten times longer than the default overflow value.
- interval— A specific overflow value, which must be a positive integer and can be in decimal
 or hexadecimal format.

The default is the normal threshold, which is predefined for each counter and which appears in the counter list. See also "Limitations on Hardware Counter Overflow Profiling" on page 49.

If you use the -h option without explicitly specifying a -p option, clock-based profiling is turned off. To collect both hardware counter data and clock-based data, you must specify both a -h option and a -p option.

-s option

Collect synchronization wait tracing data. The allowed values of *option* are:

- all Enable synchronization wait tracing with a zero threshold. This option forces all synchronization events to be recorded.
- calibrate Enable synchronization wait tracing and set the threshold value by calibration at runtime. (Equivalent to on.)
- off- Disable synchronization wait tracing.
- on– Enable synchronization wait tracing with the default threshold, which is to set the value by calibration at runtime. (Equivalent to calibrate.)
- *value* Set the threshold to *value*, given as a positive integer in microseconds.

Synchronization wait tracing data is not recorded for Java monitors.

-Hoption

Collect heap tracing data. The allowed values of *option* are:

- on– Turn on tracing of heap allocation and deallocation requests.
- off-Turn off heap tracing.

Heap tracing is turned off by default. Heap tracing is not supported for Java programs; specifying it is treated as an error.

-moption

Collect MPI tracing data. The allowed values of option are:

- on– Turn on tracing of MPI calls.
- off-Turn off tracing of MPI calls.

MPI tracing is turned off by default.

See "MPI Tracing Data" on page 31 for more information about the MPI functions whose calls are traced and the metrics that are computed from the tracing data.

-Soption

Record sample packets periodically. The allowed values of *option* are:

- off-Turn off periodic sampling.
- on– Turn on periodic sampling with the default sampling interval of 1 second.
- value Turn on periodic sampling and set the sampling interval to value. The interval value must be positive, and is given in seconds.

By default, periodic sampling at 1 second intervals is enabled.

-coption

Record count data, for SPARC processors only.

Note – This feature requires you to install the Binary Interface Tool (BIT), which is part of the Add-on Cool Tools for Sun Studio 12, available at http://cooltools.sunsource.net/. BIT is a tool for measuring performance or test suite coverage of SPARC binaries.

The allowed values of option are

- on- Turn on collection of function and instruction count data. Data is recorded for the executable and for any shared objects that the executable statically links with, provided that those executables and shared objects were compiled with the -xbinopt=prepare flag. Any other shared objects that are statically linked but not compiled with the -xbinopt=prepare flag are not included in the data. Likewise, any shared objects that are dynamically opened are not included in the data. The data is viewed in the Instruction-Frequency tab in Performance Analyzer, or with the er_print ifreq command.
- static- Generates an experiment with the assumption that every instruction in the target executable and any statically linked shared objects was executed exactly once. As with the -c on option, the -c static option requires that the executables and shared objects are compiled with the -xbinopt=prepare flag.

-roption

Collect data for data race detection or deadlock detection for the Thread Analyzer. The allowed values are:

- on- Turn on thread analyzer data-race-detection data
- off- Turn off thread analyzer data
- all-Turn on all thread analyzer data
- race- Turn on thread analyzer data-race-detection data
- deadlock Collect deadlock and potential-deadlock data
- dt*N*− Turn on specific thread analyzer data types, as named by the dt* parameters.

For more information about the collect -r command and Thread Analyzer, see the *Sun Studio 12: Thread Analyzer User's Guide* and the tha.1 man page.

Experiment Control Options

-Foption

Control whether or not descendant processes should have their data recorded. The allowed values of *option* are:

 on- Record experiments only on descendant processes that are created by functions fork, exec, and their variants.

- all-Record experiments on all descendant processes.
- off- Do not record experiments on descendant processes.
- = regexp- Record experiments on all descendant processes whose name or lineage matches the specified regular expression.

If you specify the -F on option, the Collector follows processes created by calls to the functions fork(2), fork(3F), vfork(2), and exec(2) and its variants. The call to vfork is replaced internally by a call to fork1.

If you specify the -F all option, the Collector follows all descendant processes including those created by calls to system(3C), system(3F), sh(3F), and popen(3C), and similar functions, and their associated descendant processes.

If you specify the -F '= regexp' option, the Collector follows all descendant processes whose name or lineage matches the specified regular expression. See the regexp(5) man page for information about regular expressions.

When you collect data on descendant processes, the Collector opens a new experiment for each descendant process inside the founder experiment. These new experiments are named by adding an underscore, a letter, and a number to the experiment suffix, as follows:

- The letter is either an "f" to indicate a fork, an "x" to indicate an exec, or "c" to indicate any other descendant process.
- The number is the index of the fork or exec (whether successful or not) or other call.

For example, if the experiment name for the initial process is test.1.er, the experiment for the child process created by its third fork is test.1.er/_f3.er. If that child process execs a new image, the corresponding experiment name is test.1.er/_f3_x1.er. If that child creates another process using a popen call, the experiment name is test.1.er/_f3_x1_c1.er.

The Analyzer and the er_print utility automatically read experiments for descendant processes when the founder experiment is read, but the experiments for the descendant processes are not selected for data display.

To select the data for display from the command line, specify the path name explicitly to either er_print or analyzer. The specified path must include the founder experiment name, and descendant experiment name inside the founder directory.

For example, here's what you specify to see the data for the third fork of the test.1.er experiment:

```
er_print test.1.er/_f3.er
analyzer test.1.er/_f3.er
```

Alternatively, you can prepare an experiment group file with the explicit names of the descendant experiments in which you are interested.

To examine descendant processes in the Analyzer, load the founder experiment and select Filter Data from the View menu. A list of experiments is displayed with only the founder experiment checked. Uncheck it and check the descendant experiment of interest.

Note – If the founder process exits while descendant processes are being followed, collection of data from descendants might continue. The founder experiment directory continues to grow accordingly.

- j option

Enable Java profiling when the target program is a JVM. The allowed values of *option* are:

- on Recognize methods compiled by the Java HotSpot virtual machine, and attempt to record Java call stacks.
- off Do not attempt to recognize methods compiled by the Java HotSpot virtual machine.
- *path* Record profiling data for the JVM installed in the specified *path*.

The -j option is not needed if you want to collect data on a . class file or a . jar file, provided that the path to the java executable is in either the JDK_HOME environment variable or the JAVA_PATH environment variable. You can then specify the target *program* on the collect command line as the . class file or the . jar file, with or without the extension.

If you cannot define the path to java in the JDK_HOME or JAVA_PATH environment variables, or if you want to disable the recognition of methods compiled by the Java HotSpot virtual machine you can use the -j option. If you use this option, the *program* specified on the collect command line must be a Java virtual machine whose version is not earlier than 1.5_03. The collect command verifies that *program* is a JVM, and is an ELF executable; if it is not, the collect command prints an error message.

If you want to collect data using the 64-bit JVM, you must not use the -d64 option to java for a 32-bit JVM. If you do so, no data is collected. Instead you must specify the path to the 64-bit JVM either in the *program* argument to the collect command or in one of the environment variables given in this section.

-J java_argument

Specify a single argument to be passed to the JVM used for profiling. If you specify the -J option, but do not specify Java profiling, an error is generated, and no experiment is run. The argument is passed as a single argument to the JVM. If multiple arguments are needed, do not use the -J option. Instead, specify the path to the JVM explicitly, use -j on, and add the arguments for the JVM after the path to the JVM on the collect command line.

- L signal

Record a sample packet when the signal named *signal* is delivered to the process.

You can specify the signal by the full signal name, by the signal name without the initial letters SIG, or by the signal number. Do not use a signal that is used by the program or that would terminate execution. Suggested signals are SIGUSR1 and SIGUSR2. Signals can be delivered to a process by the kill command.

If you use both the -l and the -yoptions, you must use different signals for each option.

If you use this option and your program has its own signal handler, you should make sure that the signal that you specify with -l is passed on to the Collector's signal handler, and is not intercepted or ignored.

See the signal(3HEAD) man page for more information about signals.

-t duration

Specify a time range for data collection.

The *duration* can be specified as a single number, with an optional mors suffix, to indicate the time in minutes or seconds at which the experiment should be terminated. By default, the duration is in seconds. The *duration* can also be specified as two such numbers separated by a hyphen, which causes data collection to pause until the first time elapses, and at that time data collection begins. When the second time is reached, data collection terminates. If the second number is a zero, data will be collected after the initial pause until the end of the program's run. Even if the experiment is terminated, the target process is allowed to run to completion.

- X

Leave the target process stopped on exit from the exec system call in order to allow a debugger to attach to it. If you attach dbx to the process, use the dbx commands ignore PROF and ignore EMT to ensure that collection signals are passed on to the collect command.

-y signal[, r]

Control recording of data with the signal named *signal*. Whenever the signal is delivered to the process, it switches between the paused state, in which no data is recorded, and the recording state, in which data is recorded. Sample points are always recorded, regardless of the state of the switch.

The signal can be specified by the full signal name, by the signal name without the initial letters SIG, or by the signal number. Do not use a signal that is used by the program or that would terminate execution. Suggested signals are SIGUSR1 and SIGUSR2. Signals can be delivered to a process by the kill(1) command.

If you use both the -1 and the -y options, you must use different signals for each option.

When the -y option is used, the Collector is started in the recording state if the optional r argument is given, otherwise it is started in the paused state. If the -y option is not used, the Collector is started in the recording state.

If you use this option and your program has its own signal handler, make sure that the signal that you specify with -y is passed on to the Collector's signal handler, and is not intercepted or ignored.

See the signal(3HEAD) man page for more information about signals.

Output Options

-o experiment_name

Use *experiment_name* as the name of the experiment to be recorded. The *experiment_name* string must end in the string ".er"; if not, the collect utility prints an error message and exits.

-d directory-name

Place the experiment in directory *directory-name*. This option only applies to individual experiments and not to experiment groups. If the directory does not exist, the collect utility prints an error message and exits. If a group is specified with the -g option, the group file is also written to *directory-name*.

-g group-name

Make the experiment part of experiment group *group-name*. If *group-name* does not end in .erg, the collect utility prints an error message and exits. If the group exists, the experiment is added to it. If *group-name* is not an absolute path, the experiment group is placed in the directory *directory-name* if a directory has been specified with -d, otherwise it is placed in the current directory.

- A option

Control whether or not load objects used by the target process should be archived or copied into the recorded experiment. The allowed values of option are:

- off- do not archive load objects into the experiment.
- on– archive load objects into the experiment.
- copy copy and archive load objects into the experiment.

If you expect to copy experiments to a different machine from which they were recorded, or to read the experiments from a different machine, specify - A copy. Using this option does not copy any source files or object files into the experiment. You should ensure that those files are accessible on the machine to which you are copying the experiment.

-Lsize

Limit the amount of profiling data recorded to *size* megabytes. The limit applies to the sum of the amounts of clock-based profiling data, hardware counter overflow profiling data, and synchronization wait tracing data, but not to sample points. The limit is only approximate, and can be exceeded.

When the limit is reached, no more profiling data is recorded but the experiment remains open until the target process terminates. If periodic sampling is enabled, sample points continue to be written.

The default limit on the amount of data recorded is 2000 Mbytes. This limit was chosen because the Performance Analyzer cannot process experiments that contain more than 2 Gbytes of data. To remove the limit, set *size* to unlimited or none.

-0 file

Append all output from collect itself to the name *file*, but do not redirect the output from the spawned target. If file is set to /dev/null, suppress all output from collect, including any error messages.

Other Options

-C comment

Put the comment into the notes file for the experiment. You can supply up to ten -C options. The contents of the notes file are prepended to the experiment header.

- n

Do not run the target but print the details of the experiment that would be generated if the target were run. This option is a dry run option.

-R

Display the text version of the Performance Analyzer Readme in the terminal window. If the readme is not found, a warning is printed. No further arguments are examined, and no further processing is done.

-V

Print the current version of the collect command. No further arguments are examined, and no further processing is done.

- V

Print the current version of the collect command and detailed information about the experiment being run.

Collecting Data From a Running Process Using the collect **Utility**

In the Solaris OS only, the -P *pid* option can be used with the collect utility to attach to the process with the specified PID, and collect data from the process. The other options to the collect command are translated into a script for dbx, which is then invoked to collect the data. Only clock-based profile data (-p option) and hardware counter overflow profile data (-h option) can be collected. Tracing data is not supported.

If you use the -h option without explicitly specifying a -p option, clock-based profiling is turned off. To collect both hardware counter data and clock-based data, you must specify both a -h option and a -p option.

▼ To Collect Data From a Running Process Using the collect Utility

1 Determine the program's process ID (PID).

If you started the program from the command line and put it in the background, its PID will be printed to standard output by the shell. Otherwise you can determine the program's PID by typing the following.

```
% ps -ef | grep program-name
```

2 Use the collect command to enable data collection on the process, and set any optional parameters.

```
% collect -P pid collect-options
```

The collector options are described in "Data Collection Options" on page 55. For information about clock-based profiling, see "-p *option*" on page 56. For information about hardware clock profiling, see -h option.

Collecting Data Using the dbx collector Subcommands

This section shows how to run the Collector from dbx, and then explains each of the subcommands that you can use with the collector command within dbx.

▼ To Run the Collector From dbx:

1 Load your program into dbx by typing the following command.

% dbx program

2 Use the collector command to enable data collection, select the data types, and set any optional parameters.

(dbx) collector subcommand

To get a listing of available collector subcommands, type:

(dbx) help collector

You must use one collector command for each subcommand.

3 Set up any dbx options you wish to use and run the program.

If a subcommand is incorrectly given, a warning message is printed and the subcommand is ignored. A complete listing of the collector subcommands follows.

Data Collection Subcommands

The following subcommands control the types of data that are collected by the Collector. They are ignored with a warning if an experiment is active.

profile option

Controls the collection of clock-based profiling data. The allowed values for option are:

- on– Enables clock-based profiling with the default profiling interval of 10 ms.
- off- Disables clock-based profiling.
- timer interval—Sets the profiling interval. The allowed values of interval are
 - on– Use the default profiling interval of approximately 10 milliseconds.
 - lo[w] Use the low-resolution profiling interval of approximately 100 milliseconds.
 - hi[gh] Use the high-resolution profiling interval of approximately 1 millisecond. See "Limitations on Clock-Based Profiling" on page 49 for information on enabling high-resolution profiling.

■ *value*—Set the profiling interval to *value*. The default units for *value* are milliseconds. You can specify *value* as an integer or a floating-point number. The numeric value can optionally be followed by the suffix m to select millisecond units or u to select microsecond units. The value should be a multiple of the clock resolution. If the value is larger than the clock resolution but not a multiple it is rounded down. If the value is smaller than the clock resolution it is set to the clock resolution. In both cases a warning message is printed.

The default setting is approximately 10 milliseconds.

The Collector collects clock-based profiling data by default, unless the collection of hardware-counter overflow profiling data is turned on using the hwprofile subcommand.

hwprofile option

Controls the collection of hardware counter overflow profiling data. If you attempt to enable hardware counter overflow profiling on systems that do not support it, dbx returns a warning message and the command is ignored. The allowed values for *option* are:

- on– Turns on hardware counter overflow profiling. The default action is to collect data for the cycles counter at the normal overflow value.
- off-Turns off hardware counter overflow profiling.
- list-Returns a list of available counters. See "Hardware Counter Lists" on page 27 for a
 description of the list. If your system does not support hardware counter overflow profiling,
 dbx returns a warning message.
- counter counter_definition... [, counter_definition] A counter definition can take one of
 the following forms, depending on whether the processor supports attributes for hardware
 counters.

```
[+] counter_name[/ register_number] [, interval]
[+] counter_name[~ attribute_1=value_1]...[~attribute_n = value_n] [/ register_number] [, interval]
```

Selects the hardware counter *name*, and sets its overflow value to *interval*; optionally selects additional hardware counter names and sets their overflow values to the specified intervals. The overflow value can be one of the following.

- on, or a null string— The default overflow value, which you can determine by typing collect with no arguments.
- hi[gh] The high-resolution value for the chosen counter, which is approximately ten times shorter than the default overflow value. The abbreviation h is also supported for compatibility with previous software releases.
- lo[w] The low-resolution value for the chosen counter, which is approximately ten times longer than the default overflow value.

 interval— A specific overflow value, which must be a positive integer and can be in decimal or hexadecimal format.

If you specify more than one counter, they must use different registers. If they do not, a warning message is printed and the command is ignored.

If the hardware counter counts events that relate to memory access, you can prefix the counter name with a + sign to turn on searching for the true PC of the instruction that caused the counter overflow. If the search is successful, the PC and the effective address that was referenced are stored in the event data packet.

The Collector does not collect hardware counter overflow profiling data by default. If hardware-counter overflow profiling is enabled and a profile command has not been given, clock-based profiling is turned off.

See also "Limitations on Hardware Counter Overflow Profiling" on page 49.

synctrace option

Controls the collection of synchronization wait tracing data. The allowed values for option are

- on– Enable synchronization wait tracing with the default threshold.
- off- Disable synchronization wait tracing.
- threshold value Sets the threshold for the minimum synchronization delay. The allowed values for value are:
 - all– Use a zero threshold. This option forces all synchronization events to be recorded.
 - calibrate Set the threshold value by calibration at runtime. (Equivalent to on.)
 - off- Turn off synchronization wait tracing.
 - on— Use the default threshold, which is to set the value by calibration at runtime. (Equivalent to calibrate.)
 - *number* Set the threshold to *number*, given as a positive integer in microseconds. If value is 0, all events are traced.

By default, the Collector does not collect synchronization wait tracing data.

heaptrace option

Controls the collection of heap tracing data. The allowed values for option are

- on– Enables heap tracing.
- off- Disables heap tracing.

By default, the Collector does not collect heap tracing data.

mpitrace option

Controls the collection of MPI tracing data. The allowed values for option are

- on– Enables tracing of MPI calls.
- off- Disables tracing of MPI calls.

By default, the Collector does not collect MPI tracing data.

tha option

Collect data for data race detection or deadlock detection for the Thread Analyzer. The allowed values are:

- on- Turn on thread analyzer data-race-detection data
- off- Turn off thread analyzer data
- all-Turn on all thread analyzer data
- race- Turn on thread analyzer data-race-detection data
- deadlock Collect deadlock and potential-deadlock data
- dtN- Turn on specific thread analyzer data types, as named by the dt^* parameters.

For more information about the Thread Analyzer, see the *Sun Studio 12: Thread Analyzer User's Guide* and the tha.1 man page.

sample option

Controls the sampling mode. The allowed values for option are:

- periodic Enables periodic sampling.
- manual Disables periodic sampling. Manual sampling remains enabled.
- period *value* Sets the sampling interval to *value*, given in seconds.

By default, periodic sampling is enabled, with a sampling interval *value* of 1 second.

dbxsample{on|off}

Controls the recording of samples when dbx stops the target process. The meanings of the keywords are as follows:

- on– A sample is recorded each time dbx stops the target process.
- off-Samples are not recorded when dbx stops the target process.

By default, samples are recorded when dbx stops the target process.

Experiment Control Subcommands

disable

Disables data collection. If a process is running and collecting data, it terminates the experiment and disables data collection. If a process is running and data collection is disabled, it is ignored with a warning. If no process is running, it disables data collection for subsequent runs.

enable

Enables data collection. If a process is running but data collection is disabled, it enables data collection and starts a new experiment. If a process is running and data collection is enabled, it is ignored with a warning. If no process is running, it enables data collection for subsequent runs.

You can enable and disable data collection as many times as you like during the execution of any process. Each time you enable data collection, a new experiment is created.

pause

Suspends the collection of data, but leaves the experiment open. Sample points are not recorded while the Collector is paused. A sample is generated prior to a pause, and another sample is generated immediately following a resume. This subcommand is ignored if data collection is already paused.

resume

Resumes data collection after a pause has been issued. This subcommand is ignored if data is being collected.

sample record name

Record a sample packet with the label *name*. The label is displayed in the Event tab of the Performance Analyzer.

Output Subcommands

The following subcommands define storage options for the experiment. They are ignored with a warning if an experiment is active.

archive *mode*

Set the mode for archiving the experiment. The allowed values for *mode* are

- on– normal archiving of load objects
- off- no archiving of load objects

copy – copy load objects into experiment in addition to normal archiving

If you intend to move the experiment to a different machine, or read it from another machine, you should enable the copying of load objects. If an experiment is active, the command is ignored with a warning. This command does not copy source files or object files into the experiment.

limit value

Limit the amount of profiling data recorded to *value* megabytes. The limit applies to the sum of the amounts of clock-based profiling data, hardware counter overflow profiling data, and synchronization wait tracing data, but not to sample points. The limit is only approximate, and can be exceeded.

When the limit is reached, no more profiling data is recorded but the experiment remains open and sample points continue to be recorded.

The default limit on the amount of data recorded is 2000 Mbytes. This limit was chosen because the Performance Analyzer cannot process experiments that contain more than 2 Gbytes of data. To remove the limit, set *value* to unlimited or none.

store option

Governs where the experiment is stored. This command is ignored with a warning if an experiment is active. The allowed values for *option* are:

- directory *directory-name* Sets the directory where the experiment and any experiment group is stored. This subcommand is ignored with a warning if the directory does not exist.
- experiment experiment-name— Sets the name of the experiment. If the experiment name does not end in .er, the subcommand is ignored with a warning. See "Where the Data Is Stored" on page 51 for more information on experiment names and how the Collector handles them.
- group group-name— Sets the name of the experiment group. If the group name does not end in .erg, the subcommand is ignored with a warning. If the group already exists, the experiment is added to the group. If the directory name has been set using the store directory subcommand and the group name is not an absolute path, the group name is prefixed with the directory name.

Information Subcommands

show

Shows the current setting of every Collector control.

status

Reports on the status of any open experiment.

Collecting Data From a Running Process With dbx

The Collector allows you to collect data from a running process. If the process is already under the control of dbx, you can pause the process and enable data collection using the methods described in previous sections.

If the process is not under the control of dbx, the collect —P pid command can be used to collect data from a running process, as described in "Collecting Data From a Running Process Using the collect Utility" on page 65. You can also attach dbx to it, collect performance data, and then detach from the process, leaving it to continue. If you want to collect performance data for selected descendant processes, you must attach dbx to each process.

▼ To Collect Data From a Running Process That is Not Under the Control of dbx:

1 Determine the program's process ID (PID).

If you started the program from the command line and put it in the background, its PID will be printed to standard output by the shell. Otherwise you can determine the program's PID by typing the following.

% ps -ef | grep program-name

2 Attach to the process.

From dbx, type the following.

(dbx) attach program-name pid

If dbx is not already running, type the following.

% dbx program-name pid

Attaching to a running process pauses the process.

See the manual, *Sun Studio 12: Debugging a Program With dbx*, for more information about attaching to a process.

3 Start data collection.

From dbx, use the collector command to set up the data collection parameters and the cont command to resume execution of the process.

4 Detach from the process.

When you have finished collecting data, pause the program and then detach the process from dbx.

From dbx, type the following. (dbx) detach

Collecting Tracing Data From a Running Program

If you want to collect any kind of tracing data, you must preload the Collector library, libcollector.so, before you run your program, because the library provides wrappers to the real functions that enable data collection to take place. In addition, the Collector adds wrapper functions to other system library calls to guarantee the integrity of performance data. If you do not preload the Collector library, these wrapper functions cannot be inserted. See "Using System Libraries" on page 42 for more information on how the Collector interposes on system library functions.

To preload libcollector.so, you must set both the name of the library and the path to the library using environment variables, as shown in the table below. Use the environment variable LD_PRELOAD to set the name of the library. Use the environment variables LD_LIBRARY_PATH, LD_LIBRARY_PATH_32, or LD_LIBRARY_PATH_64 to set the path to the library. LD_LIBRARY_PATH is used if the _32 and _64 variants are not defined. If you have already defined these environment variables, add new values to them.

TABLE 3-2 Environment Variable Settings for Preloading the libcollector. so Library

Environment Variable	Value
LD_PRELOAD	libcollector.so
LD_LIBRARY_PATH	/opt/SUNWspro/prod/lib/dbxruntime
LD_LIBRARY_PATH_32	/opt/SUNWspro/prod/lib/dbxruntime
LD_LIBRARY_PATH_64	/opt/SUNWspro/prod/lib/v9/dbxruntime
LD_LIBRARY_PATH_64	/opt/SUNWspro/prod/lib/amd64/dbxruntime

If your Sun Studio software is not installed in /opt/SUNWspro, ask your system administrator for the correct path. You can set the full path in LD_PRELOAD, but doing this can create complications when using SPARC V9 64-bit architecture.

Note – Remove the LD_PRELOAD and LD_LIBRARY_PATH settings after the run, so they do not remain in effect for other programs that are started from the same shell.

If you want to collect data from an MPI program that is already running, you must attach a separate instance of dbx to each process and enable the Collector for each process. When you attach dbx to the processes in an MPI job, each process is halted and restarted at a different time. The time difference could change the interaction between the MPI processes and affect the performance data you collect. To minimize this problem, one solution is to use the pstop(1) command to halt all the processes. However, once you attach dbx to the processes, you must restart them from dbx, and there is a timing delay in restarting the processes, which can affect the synchronization of the MPI processes. See also "Collecting Data From MPI Programs" on page 74.

Collecting Data From MPI Programs

The Collector can collect performance data from multi-process programs that use the Message Passing Interface (MPI) library. The Open MPI library is included in the Sun HPC ClusterTools[™] 7 software, and the Sun MPI library is included in ClusterTools 5 and ClusterTools 6 software. The ClusterTools software is available at http://www.sun.com/software/products/clustertools/.

To start the parallel jobs when using ClusterTools 7, use the Open Run-Time Environment (ORTE) command mpirun.

To start parallel jobs when using ClusterTools 5 or ClusterTools 6, use the Sun Cluster Runtime Environment (CRE) command mprun.

See the Sun HPC Cluster Tools documentation for more information.

For information about MPI and the MPI standard, see the MPI web site http://www.mcs.anl.gov/mpi/. For more information about Open MPI, see the web site http://www.open-mpi.org/.

Because of the way MPI and the Collector are implemented, each MPI process records a separate experiment. Each experiment must have a unique name. Where and how the experiment is stored depends on the kinds of file systems that are available to your MPI job. Issues about storing experiments are discussed in the next section, "Storing MPI Experiments" on page 75.

To collect data from MPI jobs, you can either run the collect command under MPI or start dbx under MPI and use the dbx collector subcommands. These tasks are discussed in "Running the collect Command Under MPI" on page 76 and "Collecting Data by Starting dbx Under MPI" on page 77.

Storing MPI Experiments

Because multiprocessing environments can be complex, you should be aware of some issues about storing MPI experiments when you collect performance data from MPI programs. These issues concern the efficiency of data collection and storage, and the naming of experiments. See "Where the Data Is Stored" on page 51 for information on naming experiments, including MPI experiments.

Each MPI process that collects performance data creates its own experiment. When an MPI process creates an experiment, it locks the experiment directory. All other MPI processes must wait until the lock is released before they can use the directory. Thus, if you store the experiments on a file system that is accessible to all MPI processes, the experiments are created sequentially, but if you store the experiments on file systems that are local to each MPI process, the experiments are created concurrently.

Issues with experiment names and storage location can be avoided if you allow the Collector to create the experiment names. See the following section "Default MPI Experiment Names" on page 75.

Default MPI Experiment Names

If you do not specify an experiment name, the default experiment name is used. The Collector uses the MPI rank to construct an experiment name with the standard form *experiment.m.er*, where *m* is the MPI rank. The stem, *experiment*, is the stem of the experiment group name if you specify an experiment group, otherwise it is test. The experiment names are unique, regardless of whether you use a common file system or a local file system. Thus, if you use a local file system to record the experiments and copy them to a common file system, you do not have to rename the experiments when you copy them and reconstruct any experiment group file. In most cases, you should allow the Collector to create the experiment names to ensure unique names across all file systems.

Specifying Non-Default MPI Experiment Names

If you store the experiments on a common file system and specify an experiment name in the standard format, *experiment*. n. er, each experiment is given a unique name when the value of n is incremented for each experiment. Experiments are numbered according to the order in which MPI processes obtain the lock on the experiment directory, and cannot be guaranteed to correspond to the MPI rank of the process. If you attach dbx to MPI processes in a running MPI job, experiment numbering is determined by the order of attachment.

If you store each experiment on its own local file system and specify an explicit experiment name, each experiment might receive that same name. For example, suppose you ran an MPI job across a cluster with four single-processor nodes labelled node0, node1, node2 and node3. Each node has a local disk called /scratch, and you store the experiments in directory username on this disk. The experiments created by the MPI job have the following full path names.

```
node0:/scratch/username/test.1.er
node1:/scratch/username/test.1.er
node2:/scratch/username/test.1.er
node3:/scratch/username/test.1.er
```

The full name including the node name is unique, but in each experiment directory there is an experiment named test.l.er. If you move the experiments to a common location after the MPI job is completed, you must make sure that the names remain unique. For example, to move these experiments to your home directory, which is assumed to be accessible from all nodes, and rename the experiments, type the following commands.

```
rsh node0 'er_mv /scratch/username/test.1.er test.0.er' rsh node1 'er_mv /scratch/username/test.1.er test.1.er' rsh node2 'er_mv /scratch/username/test.1.er test.2.er' rsh node3 'er mv /scratch/username/test.1.er test.3.er'
```

For large MPI jobs, you might want to move the experiments to a common location using a script. Do not use the UNIX° commands cp or mv; use er_cp or er_mv as shown in the example above, and described in "Manipulating Experiments" on page 197.

If you do not know which local file systems are available to you, use the df-lk command or ask your system administrator. Always make sure that the experiments are stored in a directory that already exists, that is uniquely defined and that is not in use for any other experiment. Also make sure that the file system has enough space for the experiments. See "Estimating Storage Requirements" on page 53 for information on how to estimate the space needed.

Note – If you copy or move experiments between computers or nodes you cannot view the annotated source code or source lines in the annotated disassembly code unless you have access to the load objects and source files that were used to run the experiment, or a copy with the same path and timestamp.

Running the collect Command Under MPI

To collect data with the collect command under the control of MPI, use the following syntax, as appropriate for your version of ClusterTools.

On Sun HPC ClusterTools 7:

```
% mpirun -np n
collect [collect-arguments] program-name
[program-arguments]
```

On Sun HPC ClusterTools 6 and earlier:

```
% mprun -np n
collect [collect-arguments] program-name
[program-arguments]
```

In each case, *n* is the number of processes to be created by MPI. This procedure creates *n* separate instances of collect, each of which records an experiment. Read the section "Where the Data Is Stored" on page 51 for information on where and how to store the experiments.

To ensure that the sets of experiments from different MPI runs are stored separately, you can create an experiment group with the -g option for each MPI run. The experiment group should be stored on a file system that is accessible to all MPI processes. Creating an experiment group also makes it easier to load the set of experiments for a single MPI run into the Performance Analyzer. An alternative to creating a group is to specify a separate directory for each MPI run with the -d option.

Collecting Data by Starting dbx Under MPI

To start dbx and collect data under the control of MPI, use the following syntax.

On Sun HPC Cluster Tools 7:

```
% mpirun -np n dbx program-name < collection-script
```

On Sun HPC ClusterTools 6 or earlier:

```
% mprun -np n dbx program-name < collection-script
```

In each case, *n* is the number of processes to be created by MPI and *collection-script* is a dbx script that contains the commands necessary to set up and start data collection. This procedure creates *n* separate instances of dbx, each of which records an experiment on one of the MPI processes. If you do not define the experiment name, the experiment is labelled with the MPI rank. Read the section "Storing MPI Experiments" on page 75 for information on where and how to store the experiments.

You can name the experiments with the MPI rank by using the collection script and a call to MPI_Comm_rank() in your program. For example, in a C program you would insert the following line.

```
ier = MPI_Comm_rank(MPI_COMM_WORLD,&me);
```

In a Fortran program you would insert the following line.

```
call MPI_Comm_rank(MPI_COMM_WORLD, me, ier)
```

If this call was inserted at line 17, for example, you could use a script like this.

```
stop at 18
run program-arguments
rank=$[me]
collector enable
collector store filename experiment.$rank.er
cont
quit
```

Using collect With ppgsz

You can use collect with ppgsz(1) by running collect on the ppgsz command and specifying the -F on or -F all flag. The founder experiment is on the ppgsz executable and uninteresting. If your path finds the 32-bit version of ppgsz, and the experiment is run on a system that supports 64-bit processes, the first thing it will do is exec its 64-bit version, creating _x1.er. That executable forks, creating _x1_f1.er.

The child process attempts to exec the named target in the first directory on your path, then in the second, and so forth, until one of the exec attempts succeeds. If, for example, the third attempt succeeds, the first two descendant experiments are named _x1_f1_x1.er and _x1_f1_x2.er, and both are completely empty. The experiment on the target is the one from the successful exec, the third one in the example, and is named _x1_f1_x3.er, stored under the founder experiment. It can be processed directly by invoking the Analyzer or the er_print utility on test.1.er/_x1_f1_x3.er.

If the 64-bit ppgsz is the initial process, or if the 32-bit ppgsz is invoked on a 32-bit kernel, the fork child that execs the real target has its data in _f1.er, and the real target's experiment is in _f1_x3.er, assuming the same path properties as in the example above.

◆ ◆ ◆ CHAPTER 4

The Performance Analyzer Tool

The Performance Analyzer is a graphical data-analysis tool that analyzes performance data collected by the Collector using the collect command, the IDE, or the collector commands in dbx. The Collector gathers performance information to create an experiment during the execution of a process, as described in Chapter 3, "Collecting Performance Data." The Performance Analyzer reads in such experiments, analyzes the data, and displays the data in tabular and graphical displays. A command-line version of the Analyzer is available as the er_print utility, which is described in Chapter 6, "The er_print Command Line Performance Analysis Tool."

Starting the Performance Analyzer

To start the Performance Analyzer, type the following on the command line:

% analyzer [control-options] [experiment-list]

Alternatively, use the Explorer in the IDE to navigate to an experiment and open it. The *experiment-list* command argument is a blank-separated list of experiment names, experiment group names, or both.

You can specify multiple experiments or experiment groups on the command line. If you specify an experiment that has descendant experiments inside it, all descendant experiments are automatically loaded, but the display of data for the descendant experiments is disabled. To load individual descendant experiments you must specify each experiment explicitly or create an experiment group.

To create an experiment group, you can use the -g argument to the collect utility. To manually create an experiment group, create a plain text file whose first line is as follows:

#analyzer experiment group

Then add the names of the experiments on subsequent lines. The file extension must be erg.

You can also use the File menu in the Analyzer window to add experiments or experiment groups. To open experiments recorded on descendant processes, you must type the file name in the Open Experiment dialog box (or Add Experiment dialog box) because the file chooser does not permit you to open an experiment as a directory.

When the Analyzer displays multiple experiments, however they were loaded, data from all the experiments is aggregated.

You can preview an experiment or experiment group for loading by single-clicking on its name in either the Open Experiment dialog or the Add Experiment dialog.

You can also start the Performance Analyzer from the command line to record an experiment as follows:

```
% analyzer [Java-options] [control-options] target [target-arguments]
```

The Analyzer starts up with the Performance Tools Collect window showing the named target and its arguments, and settings for collecting an experiment. See "Recording Experiments" on page 97 for details.

Analyzer Options

These options control the behavior of the Analyzer and are divided into three groups:

- Java options
- Control options
- Information options

Java Options

-j | --jdkhome *jvm-path*

Specify the path to the JVM software for running the Analyzer. When the -j option is not specified, the default path is taken first by examining environment variables for a path to the JVM, in the order JDK_HOME and then JAVA_PATH. If neither environment variable is set, the default path is where the Java $^{\text{TM}}$ 2 Software Development Kit was installed by the Sun Studio installer. If the SDK was not installed, the JVM found on the user's PATH is used. Use the -j option to override all the default paths.

-J jvm-options

Specify the JVM options.

Control Options

```
-f | --fontsize size
```

Specify the font size to be used in the Analyzer GUI.

```
-v | --verbose
```

Print version information and Java runtime arguments before starting.

Information Options

These options do not invoke the Performance Analyzer GUI, but print information about analyzer to standard output. The individual options below are stand-alone options; they cannot be combined with other analyzer options nor combined with target or experiment-list arguments.

Print version information and exit.

Print usage information and exit.

Analyzer Default Settings

The Analyzer uses resource files named .er.rc to determine default values for various settings upon startup. The system wide er.rc defaults file is read first, then an .er.rc file in the user's home directory, if present, then an .er.rc file in the current directory. Defaults from the .er.rc file in your home directory override the system defaults, and defaults from the .er.rc file in the current directory override both home and system defaults. The .er.rc files are used by the Analyzer and the er_print utility. Any settings in .er.rc that apply to source and disassembly compiler commentary are also used by the er_src utility.

See the sections "Default Settings for Analyzer" on page 98 for more information about the .er.rc files. See "Commands That Set Defaults" on page 129 and "Commands That Set Defaults Only For the Performance Analyzer" on page 130 for information about setting defaults with er_print commands.

Performance Analyzer GUI

The Analyzer window has a menu bar, a tool bar, and a split pane that contains tabs for the various data displays.

The Menu Bar

The menu bar contains a File menu, a View menu, a Timeline menu, and a Help menu.

The File menu is for opening, adding, and dropping experiments and experiment groups. The File menu allows you to collect data for an experiment using the Performance Analyzer GUI. For details on using the Performance Analyzer to collect data, refer to "Recording Experiments" on page 97. From the File menu, you can also create a mapfile, which is used to optimize the size of an executable or optimize its effective cache behavior. For more details on mapfiles, refer to "Generating Mapfiles and Function Reordering" on page 97.

The View menu allows you to configure how experiment data is displayed.

The Timeline menu, as its name suggests, helps you to navigate the timeline display, described in "Analyzer Data Displays" on page 82.

The Help menu provides online help for the Performance Analyzer, provides a summary of new features, has quick-reference and shortcut sections, and has a troubleshooting section.

Toolbar

The toolbar provides sets of icons as shortcuts, and includes a Find function to help you locate text or highlighted lines in the tabs. For more details about the Find function, refer to "Finding Text and Data" on page 95

Analyzer Data Displays

The Performance Analyzer uses a split-window to divide the data presentation into two panes. Each pane is tabbed to allow you to select different data displays for the same experiment or experiment group.

Data Display, Left Pane

The left pane displays tabs for the principal Analyzer displays in the order in which they appear:

- The Races tab
- The Deadlocks tab
- The Functions tab

- The Callers-Callees tab
- Dual-Source tab
- Source-Disassembly tab
- The Source tab
- The Lines tab
- The Disassembly tab
- The PCs tab
- The Timeline tab
- The Leaklist tab
- The DataObjects tab
- The DataLayout tab
- The Inst-Freq tab
- The Statistics tab
- The Experiments tab
- Various Memory Objects Tabs
- Various Index Object tabs

If you invoke the Analyzer without a target, you are prompted for an experiment to open.

By default, the first visible tab is selected. Only tabs applicable to the data in the loaded experiments are displayed.

Whether a tab is displayed in the left pane of Analyzer window when you open an experiment is determined by a tabs directive in the .er.rc files read when you start the Analyzer and the applicability of the tab to the data in the experiment. You can use the Tabs tab in the Set Data Presentation dialog box (see "Tabs Tab" on page 94) to select the tabs you want to display for an experiment.

The Races Tab

The Races tab shows a list of all the data races detected in a data-race experiment. For more information, see *Sun Studio 12: Thread Analyzer User's Guide*.

The Deadlocks tab

The Deadlocks tab shows a list of all the deadlocks detected in a deadlock experiment. For more information, see *Sun Studio 12: Thread Analyzer User's Guide*.

The Functions Tab

The Functions tab shows a list consisting of functions and their metrics. The metrics are derived from the data collected in the experiment. Metrics can be either exclusive or inclusive. Exclusive metrics represent usage within the function itself. Inclusive metrics represent usage within the function and all the functions it called.

The list of available metrics for each kind of data collected is given in the collect(1) man page. Only the functions that have non-zero metrics are listed.

Time metrics are shown as seconds, presented to millisecond precision. Percentages are shown to a precision of 0.01%. If a metric value is precisely zero, its time and percentage is shown as "0." If the value is not exactly zero, but is smaller than the precision, its value is shown as "0.000" and its percentage as "0.00". Because of rounding, percentages may not sum to exactly 100%. Count metrics are shown as an integer count.

The metrics initially shown are based on the data collected and on the default settings read from various .er.rc files. When the Performance Analyzer is initially installed, the defaults are as follows:

- For clock-based profiling, the default set consists of inclusive and exclusive User CPU time.
- For synchronization delay tracing, the default set consists of inclusive synchronization wait count and inclusive synchronization time.
- For hardware counter overflow profiling, the default set consists of inclusive and exclusive times (for counters that count in cycles) or event counts (for other counters).
- For heap tracing, the default set consists of heap leaks and bytes leaked.

If more than one type of data has been collected, the default metrics for each type are shown.

The metrics that are shown can be changed or reorganized; see the online help for details.

To search for a function, use the Find tool. For further details about the Find tool, refer to "Finding Text and Data" on page 95.

To select a single function, click on that function.

To select several functions that are displayed contiguously in the tab, select the first function of the group, then Shift-click on the last function of the group.

To select a several functions that are not displayed contiguously in the tab, select the first function of the group, then select the additional functions by Ctrl-clicking on each function.

When you click the Compose Filter Clause button on the toolbar, the Filter dialog box opens with Advanced tab selected and the Filter clause text box loaded with a filter clause that reflects the selection(s) in the Functions tab.

The Callers-Callees Tab

The Callers-Callees tab shows the selected function in a pane in the center, with callers of that function in a pane above, and callees of that function in a pane below.

In addition to showing exclusive and inclusive metric values for each function, the tab also shows attributed metrics. For the selected function, the attributed metric represents the exclusive metric for that function. For the callees, the attribute metric represents the portion of the callee's inclusive metric that is attributable to calls from the center function. The sum of attributed metrics for the callees and the selected function will add up to the inclusive metric for the selected function.

For the callers, the attributed metrics represent the portion of the selected function's inclusive metric that is attributable to calls from the callers. The sum of the attributed metrics for all callers should also add up to the inclusive metric for the selected function.

The metrics shown in the Callers-Callees tab can be changed or reorganized; see the online help for details.

Clicking once on a function in the caller or callee pane selects that function, causing the window contents to be redrawn so that the selected function appears in the center pane.

The Dual-Source Tab

The Dual-Source tab shows the two source contexts involved in the selected data race or deadlock. The tab is shown only if data-race-detection or deadlock experiments are loaded.

The Source-Disassembly Tab

The Source-Disassembly tab shows the annotated source in an upper pane, and the annotated disassembly in a lower pane. The tab is not visible by default. Use the Set Data Presentation option on the View menu to add the Source-Disassembly tab.

The Source Tab

If available, the Source tab shows the file containing the source code of the selected function, annotated with performance metrics for each source line. The full names of the source file, the corresponding object file and the load object are given in the column heading for the source code. In the rare case where the same source file is used to compile more than one object file, the Source tab shows the performance data for the object file containing the selected function.

The Analyzer looks for the file containing the selected function under the absolute pathname as recorded in the executable. If the file is not there, the Analyzer tries to find a file of the same basename in the current working directory. If you have moved the sources, or the experiment was recorded in a different file system, you can put a symbolic link from the current directory to the real source location in order to see the annotated source.

When you select a function in the Functions tab and the Source tab is opened, the source file displayed is the default source context for that function. The default source context of a function is the file containing the function's first instruction, which for C code is the function's opening brace. Immediately following the first instruction, the annotated source file adds an index line for the function. The source window displays index lines as text in red italics within angle brackets in the form:

<*Function: f_name>*

A function might have an alternate source context, which is another file that contains instructions attributed to the function. Such instructions might come from include files or from

other functions inlined into the selected function. If there are any alternate source contexts, the beginning of the default source context includes a list of extended index lines that indicate where the alternate source contexts are located.

<*Function: f, instructions from source file src.h>*

Double clicking on an index line that refers to another source context opens the file containing that source context, at the location associated with the indexed function.

To aid navigation, alternate source contexts also start with a list of index lines that refer back to functions defined in the default source context and other alternate source contexts.

The source code is interleaved with any compiler commentary that has been selected for display. The classes of commentary shown can be set in the Set Data Presentation dialog box. The default classes can be set in a .er.rc defaults file.

The metrics displayed in the Source tab can be changed or reorganized; see the online help for details.

Lines with metrics that are equal to or exceed a threshold percentage of the maximum of that metric for any line in the source file are highlighted to make it easier to find the important lines. The threshold can be set in the Set Data Presentation dialog box. The default threshold can be set in a .er.rc defaults file. Tick marks are shown next to the scrollbar, corresponding to the position of over-threshold lines within the source file. For example, if there were two over-threshold lines near the end of the source file, two ticks would be shown next to the scrollbar near the bottom of the source window. Positioning the scrollbar next to a tick mark will position the source lines displayed in the source window so that the corresponding over-threshold line is displayed.

The Lines Tab

The Lines tab shows a list consisting of source lines and their metrics. Source lines are labeled with the function from which they came and the line number and source file name. If no line-number information is available for a function, or the source file for the function is not known, all of the function's program counters (PCs) appear aggregated into a single entry for the function in the lines display. PCs from functions that are from load-objects whose functions are hidden appear aggregated as a single entry for the load-object in the lines display. Selecting a line in the Lines tab shows all the metrics for that line in the Summary tab. Selecting the Source or Disassembly tab after selecting a line from the Lines tab positions the display at the appropriate line.

The Disassembly Tab

The Disassembly tab shows a disassembly listing of the object file containing the selected function, annotated with performance metrics for each instruction.

Interleaved within the disassembly listing is the source code, if available, and any compiler commentary chosen for display. The algorithm for finding the source file in the Disassembly tab is the same as the algorithm used in the Source tab.

Just as with the Source tab, index lines are displayed in Disassembly tab. But unlike with the Source tab, index lines for alternate source contexts cannot be used directly for navigation purposes. Also, index lines for alternate source contexts are displayed at the start of where the #included or inlined code is inserted, rather than just being listed at the beginning of the Disassembly view. Code that is #included or inlined from other files shows as raw disassembly instructions without interleaving the source code. However, placing the cursor on one of these instructions and selecting the Source tab opens the source file containing the #included or inlined code. Selecting the Disassembly tab with this file displayed opens the Disassembly view in the new context, thus displaying the disassembly code with interleaved source code.

The classes of commentary shown can be set in the Set Data Presentation dialog box. The default classes can be set in a .er.rc defaults file.

The Analyzer highlights lines with metrics that are equal to or exceed a metric-specific threshold, to make it easier to find the important lines. You can set the threshold in the Set Data Presentation dialog box. You can set the default threshold in a .er.rc defaults file. As with the Source tab, tick marks are shown next to the scrollbar, corresponding to the position of over-threshold lines within the disassembly code.

The PCs Tab

The PCs tab shows a list consisting of program counters (PCs) and their metrics. PCs are labeled with the function from which they came and the offset within that function. PCs from functions that are from load-objects whose functions are hidden appear aggregated as a single entry for the load-object in the PCs display. Selecting a line in the PCs tab shows all the metrics for that PC in the Summary tab. Selecting the Source tab or Disassembly tab after selecting a line from the PCs tab positions the display at the appropriate line.

See the section "Call Stacks and Program Execution" on page 147 for more information about PCs.

The Timeline Tab

The Timeline tab shows a chart of the events and the sample points recorded by the Collector as a function of time. Data is displayed in horizontal bars. For each experiment there is a bar for sample data and a set of bars for each LWP. The set for an LWP consists of one bar for each data type recorded: clock-based profiling, hardware counter overflow profiling, synchronization tracing, heap tracing, and MPI tracing.

The bars that contain sample data show a color-coded representation of the time spent in each microstate for each sample. Samples are displayed as a period of time because the data in a sample point represents time spent between that point and the previous point. Clicking a sample displays the data for that sample in the Event tab.

The profiling data or tracing data bars show an event marker for each event recorded. The event markers consist of a color-coded representation of the call stack recorded with the event, as a stack of colored rectangles. Clicking a colored rectangle in an event marker selects the corresponding function and PC and displays the data for that event and that function in the Event tab. The selection is highlighted in both the Event tab and the Legend tab, and selecting the Source tab or Disassembly tab positions the tab display at the line corresponding to that frame in the call stack.

For some kinds of data, events may overlap and not be visible. Whenever two or more events would appear at exactly the same position, only one is drawn; if there are two or more events within one or two pixels, all are drawn. although they may not be visually distinguishable. In either case, a small gray tick mark is displayed below the drawn events indicating the overlap.

The Timeline tab of the Set Data Presentation dialog box allows you to change the types of event-specific data that are shown; to select the display of event-specific data for threads, LWPs, or CPUs; to choose to align the call stack representation at the root or at the leaf; and to choose the number of levels of the call stack that are displayed.

You can change the types of event-specific data shown in the Timeline tab, as well as the colors mapped to selected functions. For details about using the Timeline tab, refer to the online help.

The LeakList Tab

The LeakList tab shows two lines, the upper one representing leaks, and the lower one representing allocations. Each contains a call stack, similar to that shown in the Timeline tab, in the center with a bar above proportional to the bytes leaked or allocated, and a bar below proportional to the number of leaks or allocations.

Selection of a leak or allocation displays the data for the selected leak or allocation in the Leak tab, and selects a frame in the call stack, just as it does in the Timeline tab.

You can display the LeakList tab by selecting it in the Tabs tab of the Set Data Presentation dialog box (see "Tabs Tab" on page 94). You can make the LeakList tab visible only if one or more of the loaded experiments contains heap trace data.

The DataObjects Tab

The DataObjects tab shows the list of data objects with their metrics. The tab is applicable only to hardware counter overflow experiments where the aggressive backtracking option was enabled, and for source files that were compiled with the -xhwcprof option in the C compiler.

You can display the tab by selecting it in the Tabs tab of the Set Data Presentation dialog box (see "Tabs Tab" on page 94). You can make the DataObjects tab visible only if one or more of the loaded experiments contains a dataspace profile.

The tab shows hardware counter memory operation metrics against the various data structures and variables in the program.

To select a single data object, click on that object.

To select several objects that are displayed contiguously in the tab, select the first object, then press Shift while clicking on the last object.

To select several objects that are not displayed contiguously in the tab, select the first object, then select the additional objects by pressing Ctrl while clicking on each object.

When you click the Compose Filter Clause button on the toolbar, the Filter dialog box opens with Advanced tab selected and the Filter clause text box loaded with a filter clause that reflects the selection(s) in the DataObjects tab.

The DataLayout Tab

The DataLayout tab shows the annotated data object layouts for all program data objects with data-derived metric data. The layouts appear in the tab sorted by the data sort metrics values for the structure as a whole. The tab shows each aggregate data object with the total metrics attributed to it, followed by all of its elements in offset order. Each element, in turn, has its own metrics and an indicator of its size and location in 32-byte blocks.

The DataLayout tab can be displayed by selecting it in the Tabs tab of the Set Data Presentation dialog box (see "Tabs Tab" on page 94). As with the DataObjects tab, you can make the DataLayout tab visible only if one or more of the loaded experiments contains a dataspace profile.

To select a single data object, click on that object.

To select several objects that are displayed contiguously in the tab, select the first object, then press the Shift key while clicking on the last object.

To select several objects that are not displayed contiguously in the tab, select the first object, then select the additional objects by pressing the Ctrl key while clicking on each object.

When you click the Compose Filter Clause button on the toolbar, the Filter dialog box opens with Advanced tab selected and the Filter clause text box loaded with a filter clause that reflects the selection(s) in the DataLayout tab.

The Inst-Freq Tab

The Inst-Freq, or instruction-frequency, tab shows a summary of the frequency with which each type of instruction was executed in a count-data experiment. The tab also shows data about the frequency of execution of load, store, and floating-point instructions. In addition, the tab includes information about annulled instructions and instructions in a branch delay slot.

The Statistics Tab

The Statistics tab shows totals for various system statistics summed over the selected experiments and samples. The totals are followed by the statistics for the selected samples of each experiment. For information on the statistics presented, see the getrusage(3C) and proc (4) man pages.

The Experiments Tab

The Experiments tab is divided into two panels. The top panel contains a tree that includes nodes for the load objects in all the loaded experiments, and for each experiment load. When you expand the Load Objects node, a list of all load objects is displayed with various messages about their processing. When you expand the node for an experiment, two areas are displayed: a Notes area and an Info area.

The Notes area displays the contents of any notes file in the experiment. You can edit the notes by typing directly in the Notes area. The Notes area includes its own toolbar with buttons for saving or discarding the notes and for undoing or redoing any edits since the last save.

The Info area contains information about the experiments collected and the load objects accessed by the collection target, including any error messages or warning messages generated during the processing of the experiment or the load objects.

The bottom panel lists error and warning messages from the Analyzer session.

The Index Tabs

Each Index tab shows the metric values from data attributed to various index objects, such as Threads, Cpus, and Seconds. Inclusive and Exclusive metrics are not shown, since Index objects are not hierarchical. Only a single metric of each type is shown.

Several Index tabs are predefined: Threads, Cpus, Samples, and Seconds. You can define a custom index object by clicking on the Add Custom Index Tab button in the Set Data Presentation dialog box to open the Add Index Objects dialog box.

A radio button at the top of each Index tab lets you select either a Text display or a Graphical display. The Text display is similar to the display in the DataObjects tab and uses the same metric settings. The Graphical display shows a graphical representation of the relative values for each index object, with a separate histogram for each metric sorted by the data sort metric.

When you click the Filter Data button on the toolbar, the Filter Data dialog box opens. Click the Advanced tab and the Filter clause text box loaded with a filter clause that reflects the selections in the IndexObjects tab.

The MemoryObjects Tabs

Each MemoryObjects tab shows the metric values for dataspace metrics attributed to the various memory objects such as pages. If one or more of the loaded experiments contains a dataspace profile, you can select the memory objects for which you want to display tabs in the Tabs tab of the Set Data Presentation dialog box. Any number of MemoryObjects tabs can be displayed.

Various MemoryObject tabs are predefined. You can define a custom memory object by clicking the Add Custom Object button in the Set Data Presentation dialog box to open the Add Memory Objects dialog box.

A radio button on each MemoryObjects tab lets you select either a Text display or a Graphical display. The Text display is similar to the display in the DataObjects tab and uses the same metric settings. The Graphical display shows a graphical representation of the relative values for each memory object, with a separate histogram for each metric sorted by the data sort metric.

When you click the Compose Filter Clause button on the toolbar, the Filter dialog box opens with Advanced tab selected and the Filter clause text box loaded with a filter clause that reflects the selections in the MemoryObjects tab.

Data Display, Right Pane

The right pane contains the Summary tab, the Event tab, the Race Detail tab, Deadlock Detail tab, and Leak tab. By default the Summary tab is displayed.

The Summary Tab

The Summary tab shows all the recorded metrics for the selected function or load object, both as values and percentages, and information on the selected function or load object. The Summary tab is updated whenever a new function or load object is selected in any tab.

The Event Tab

The Event tab shows detailed data for the event that is selected in the Timeline tab, including the event type, leaf function, LWP ID, thread ID, and CPU ID. Below the data panel the call stack is displayed with the color coding for each function in the stack. Clicking a function in the call stack makes it the selected function.

When a sample is selected in the Timeline tab, the Event tab shows the sample number, the start and end time of the sample, and the microstates with the amount of time spent in each microstate and the color coding.

The Leak Tab

The Leak tab shows detailed data for the selected leak or allocation in the Leaklist tab. Below the data panel, the Leak tab shows the call stack at the time when the selected leak or allocation was detected. Clicking a function in the call stack makes it the selected function.

The Race Detail Tab

The Race Detail tab shows detailed data for the selected datarace in the Races tab. See the *Sun Studio 12: Thread Analyzer User's Guide* for more information.

The Deadlock Detail Tab

The Deadlock Detail tab shows detailed data for the selected Deadlock in the Deadlocks tab. See the *Sun Studio 12: Thread Analyzer User's Guide* for more information.

Setting Data Presentation Options

You can control the presentation of data from the Set Data Presentation dialog box. To open this dialog box, click the Set Data Presentation button in the toolbar or choose View \rightarrow Set Data Presentation.

The Set Data Presentation dialog box has a tabbed pane with the following tabs:

- Metrics
- Sort
- Source/Disassembly
- Formats
- Timeline
- Search Path
- Pathmaps
- Tabs

The dialog box has a Save button with which you can store the current settings, including any custom-defined memory objects.

Note – Since the defaults for the Analyzer, the er_print utility and the er_src utility are set by a common .er.rc file, output from the er_print utility and er_src utility is affected as a result of saving changes in the Set Data Preferences dialog box.

Metrics Tab

The Metrics tab shows all of the available metrics. Each metric has check boxes in one or more of the columns labeled Time, Value and %, depending on the type of metric. Alternatively, instead of setting individual metrics, you can set all metrics at once by selecting or deselecting the check boxes in the bottom row of the dialog box and then clicking on the Apply to all metrics button.

Sort Tab

The Sort tab shows the order of the metrics presented, and the choice of metric to sort by.

Source/Disassembly Tab

The Source/Disassembly tab presents a list of check boxes that you can use to select the information presented, as follows:

- The compiler commentary that is shown in the source listing and the disassembly listing
- The threshold for highlighting important lines in the source listing and the disassembly listing
- The interleaving of source code in the disassembly listing
- The metrics on the source lines in the disassembly listing
- The display of instructions in hexadecimal in the disassembly listing.

Formats Tab

The Formats tab presents a choice for the long form, short form, or mangled form of C++ function names and Java method names. If you select the Append SO name to Function name checkbox, the name of the shared object in which the function or method is located is appended to the function name or method name.

The Formats tab also presents a choice for View Mode of User, Expert, or Machine. The View Mode setting controls the processing of Java experiments and OpenMP experiments.

For Java experiments:

- User mode shows Java call stacks for Java threads, and does not show housekeeping threads.
- Expert mode shows Java call stacks for Java threads when the user's Java code is being executed, and machine call stacks when JVM code is being executed or when the JVM software does not report a Java call stack. It shows machine call stacks for housekeeping threads.
- Machine mode shows machine call stacks for all threads.

For OpenMP experiments:

- User mode and expert mode show master-thread call stacks and slave-thread call stacks reconciled, and add special functions, with the names of form <OMP-*>, when the OpenMP runtime is performing certain operations.
- Machine mode shows machine call stacks for all threads.

For all other experiments, all three modes show the same data.

Timeline Tab

The Timeline tab presents choices for the types of event-specific data that are shown, the display of event-specific data for threads, LWP, or CPUs; the alignment of the call stack representation at the root or at the leaf; and the number of levels of the call stack that are displayed.

Search Path Tab

The Search Path tab allows you to manage a list of directories to be used for searching for source and object files. The special name \$expts refers to the experiments loaded; all other names should be paths in the file system.

Pathmaps Tab

The Pathmaps tab enables you to map the leading part of a file path from one location to another. You specify a set of prefix pairs: the original prefix and a new prefix. The path is then mapped from the original prefix to the new prefix for a given path. Multiple pathmaps may be specified, and each will be tried in turn to find a file.

Tabs Tab

You can use the Tabs tab of the Set Data Presentation dialog box to select the tabs to be displayed in the Analyzer window.

The Tabs tab lists the applicable tabs for the current experiment. The standard tabs are listed in the left column. The Index tabs are listed in the center column, and the defined Memory tabs are listed in the right column.

In the left column, click the checkboxes to select or deselect standard tabs for display.

In the center column, click the check boxes to select or deselect Index tabs for display. The predefined Index tabs are Threads, Cpus, Samples, and Seconds. To add a tab for another index object, click the Add Custom Index Tab button to open the Add Index Object dialog. In the Object name text box, type the name of the new object. In the Formula text box, type an index expression to be used to map the recorded physical address or virtual address to the object index. For information on the rules for index expressions, see "indxobj_define <code>indxobj_type index_exp</code>" on page 120

In the right column, click the check boxes to select or deselect Memory Object tabs for display. To add a custom object, click the Add Custom Object button to open the Add Memory Object dialog box. In the Object name text box, type the name of the new custom memory object. In the Formula text box, type an index expression to be used to map the recorded physical address or virtual address to the object index. For information on the rules for index expressions, see "mobj_define mobj_type index_exp" on page 119

When you have added a custom index object or memory object, a checkbox for that object is added to the the Tabs tab and is selected by default.

Saving Data Presentation Options

The Set Data Presentation dialog box has a Save button to store the current settings.

Note – Since the defaults for the Analyzer, the er_print utility and the er_src utility are set by a common .er.rc file, output from the er_print utility and the er_src utility is affected as a result of saving changes in the Analyzer's Set Data Preferences dialog box.

Finding Text and Data

The Analyzer has a Find tool available through the toolbar, with two options for search targets that are given in a combo box. You can search for text in the Name column of the Functions tab or Callers-Callees tabs and in the code column of the Source tab and Disassembly tab. You can search for a high-metric item in the Source tab and Disassembly tab. The metric values on the lines containing high-metric items are highlighted in green. Use the arrow buttons next to the Find field to search up or down.

Showing or Hiding Functions

By default, all functions in each load object are shown in the Functions tab and Callers-Callees tab. You can hide all the functions in a load object using the Show/Hide Functions dialog box; see the online help for details.

When the functions in a load object are hidden, the Functions tab and Callers-Callees tab show a single entry representing the aggregate of all functions from the load object. Similarly, the Lines tab and PCs tab show a single entry aggregating all PCs from all functions from the load object.

In contrast to filtering, metrics corresponding to hidden functions are still represented in some form in all displays.

Filtering Data

By default, data is shown in each tab for all experiments, all samples, all threads, all LWPs, and all CPUs. A subset of data can be selected using the Filter Data dialog box.

The Filter Data dialog box has a Simple tab and an Advanced tab. In the Simple tab, you can select the experiments for which you want to filter data. You can then specify the samples, threads, LWPs, and CPUs for which to display metrics. In the Advanced tab, you can specify a filter expression that evaluates as true for any data record you want to include in the display. For information on the grammar to use in a filter expression, see "Expression Grammar" on page 133.

When you have made a selection in the Functions tab, DataLayout tab, DataObjects tab, or a MemoryObject tab in the Analyzer, clicking the Compose Filter Clause button on the toolbar opens the Advanced tab of the Filter Data dialog box and loads the Filter clause text box with a clause that reflects the selection.

For details about using the Filter Data dialog box, refer to the online help.

Experiment Selection

The Analyzer allows filtering by experiment when more than one experiment is loaded. The experiments can be loaded individually, or by naming an experiment group.

Sample Selection

Samples are numbered from 1 to N, and you can select any set of samples. The selection consists of a comma-separated list of sample numbers or ranges such as 1–5.

Thread Selection

Threads are numbered from 1 to *N*, and you can select any set of threads. The selection consists of a comma-separated list of thread numbers or ranges. Profile data for threads only covers that part of the run where the thread was actually scheduled on an LWP.

LWP Selection

LWPs are numbered from 1 to N, and you can select any set of LWPs. The selection consists of a comma-separated list of LWP numbers or ranges. If synchronization data is recorded, the LWP reported is the LWP at entry to a synchronization event, which might be different from the LWP at exit from the synchronization event.

On Linux systems, threads and LWPs are synonymous.

CPU Selection

Where CPU information is recorded (Solaris OS), any set of CPUs can be selected. The selection consists of a comma-separated list of CPU numbers or ranges.

Recording Experiments

When you invoke the Analyzer with a target name and target arguments, it starts up with the Performance Tools Collect window open, which allows you to record an experiment on the named target. If you invoke the Analyzer with no arguments, or with an experiment list, you can record a new experiment by choosing File → Collect Experiment to open the Performance Tools Collect window

The Collect Experiment tab of the Performance Tools Collect window has a panel you use to specify the target, its arguments, and the various parameters to be used to run the experiment. They correspond to the options available in the collect command, as described in Chapter 3, "Collecting Performance Data."

Immediately below the panel is a Preview Command button, and a text field. When you click the button, the text field is filled in with the collect command that would be used when you click the Run button.

In the Data to Collect tab, you can select the types of data you want to collect.

The Input/Output tab has two panels: one that receives output from the Collector itself, and a second for output from the process.

A set of buttons allows the following operations:

- Run the experiment
- Terminate the run
- Send Pause, Resume, and Sample signals to the process during the run (enabled if the corresponding signals are specified),
- Close the window.

If you close the window while an experiment is in progress, the experiment continues. If you reopen the window, it shows the experiment in progress, as if it had been left open during the run. If you attempt to exit the Analyzer while an experiment is in progress, a dialog box is posted asking whether you want the run terminated or allowed to continue.

Generating Mapfiles and Function Reordering

In addition to analyzing the data, the Analyzer also provides a function-reordering capability. Based on the data in an experiment, the Analyzer can generate a mapfile which, when used with the static linker (ld) to relink the application, creates an executable with a smaller working set size, or better I-cache behavior, or both.

The order of the functions that is recorded in the mapfile and used to reorder the functions in the executable is determined by the metric that is used for sorting the function list. Exclusive

User CPU time or Exclusive CPU Cycle time are normally used for producing a mapfile. Some metrics, such as those from synchronization delay or heap tracing, or name or address do not produce meaningful ordering for a mapfile.

Default Settings for Analyzer

The Analyzer processes directives from an .er.rc file in the current directory, if present; from a .er.rc file in your home directory, if present; and from a system-wide .er.rc file. These files can contain default settings for which tabs are visible when you load an experiment into the Analyzer. The tabs are named by the er_print command for the corresponding report except for the Experiments tab and the Timeline tab.

The .er.rc files can also contain default settings for metrics, for sorting, and for specifying compiler commentary options and highlighting thresholds for source and disassembly output. They also specify default settings for the Timeline tab, and for name formatting, and setting View mode. The files can also contain directives to control the search path or pathmaps for source files and object files.

The .er.rc files can also contain definitions for custom MemoryObjects and IndexObjects.

The .er.rc files can also contain a setting for en_desc mode to control whether or not descendant experiments are selected and read when the founder experiment is read. The setting for en_desc may be on, off, or =regexp to specifying reading and loading all descendants, no descendants, or reading and loading those descendants whose lineage or executable name match the given regular expression, respectively.

In the Analyzer GUI, you can save an .er.rc file by clicking the Save button in the Set Data Presentation dialog, which you can open from the View menu. Saving an .er.rc file from the Set Data Presentation dialog box not only affects subsequent invocations of the Analyzer, but also the er print utility and er src utility.



Kernel Profiling

This chapter describes how you can use the Sun Studio performance tools to profile the kernel while the Solaris OS is running a load. Kernel profiling is available if you are running Sun Studio software on the Solaris 10 OS. Kernel profiling is *not* available on the Solaris 9 OS and on Linux systems.

Kernel Experiments

You can record kernel profiles with the er_kernel utility.

The er_kernel utility uses the DTrace driver, a comprehensive dynamic tracing facility that is built into Solaris 10 OS.

The er_kernel utility captures kernel profile data and records the data as an Analyzer experiment in the same format as a user profile. The experiment can be processed by the er_print utility or the Performance Analyzer. A kernel experiment can show function data, caller-callee data, instruction-level data, and a timeline, but not source-line data (because most Solaris OS modules do not contain line-number tables).

Setting Up Your System for Kernel Profiling

Before you can use the er_kernel utility for kernel profiling, you need to set up access to the DTrace driver.

Normally, the DTrace driver is restricted to user root. To run er_kernel utility as a user other than root, you must have specific privileges assigned, and be a member of group sys. To assign the necessary privileges, add the following line to the file /etc/user attr:

username::::defaultpriv=basic,dtrace_kernel,dtrace_proc

To add yourself to the group sys, add your user name to the sys line in the file /etc/group.

Running the er kernel Utility

You can run the er_kernel utility to profile only the kernel or both the kernel and the load you are running. For a complete description of the er_kernel command, see the er_kernel (1) man page.

Profiling the Kernel

1 Collect the experiment by typing:

% er_kernel -p on

- 2 Run whatever load you want in a separate shell.
- 3 When the load completes, terminate the en kernel utility by typing Ctrl-C.
- 4 Load the resulting experiment, named ktest.1.er by default, into the Performance Analyzer or the er print utility.

Kernel clock profiling produces one performance metric, labeled KCPU Cycles. In the Performance Analyzer, it is shown for kernel functions in the Functions Tab, for callers and callees in the Caller-Callee Tab, and for instructions in the Disassembly Tab. The Source Tab does not show data, because kernel modules, as shipped, do not usually contain file and line symbol table information (stabs).

You can replace the -p on argument to the er_kernel utility with -p high for high-resolution profiling or -p low for low-resolution profiling. If you expect the run of the load to take 2 to 20 minutes, the default clock profiling is appropriate. If you expect the run to take less than 2 minutes, use -p high; if you expect the run to take longer than 20 minutes, use -p low.

You can add a -t *duration* argument, which will cause the er_kernel utility to terminate itself according to the time specified by *duration*.

The -t *duration* can be specified as a single number, with an optional mor s suffix, to indicate the time in minutes or seconds at which the experiment should be terminated. By default, the duration is in seconds. The *duration* can also be specified as two such numbers separated by a hyphen, which causes data collection to pause until the first time elapses, and at that time data collection begins. When the second time is reached, data collection terminates. If the second number is a zero, data will be collected after the initial pause until the end of the program's run. Even if the experiment is terminated, the target process is allowed to run to completion.

You can add the -v argument if you want more information about the run printed to the screen. The -n argument lets you see a preview of the experiment that would be recorded, without actually recording anything.

By default, the experiment generated by the er_kernel utility is named ktest.1.er; the number is incremented for successive runs.

Profiling Under Load

If you have a single command, either a program or a script, that you wish to use as a load:

1 Collect the experiment by typing:

```
% er kernel -p on load
```

2 Analyze the experiment by typing:

```
% analyzer ktest.1.er
```

The er_kernel utility forks a child process and pauses for a quiet period, and then the child process runs the specified load. When the load terminates, the er_kernel utility pauses again for a quiet period and then exits. The experiment shows the behavior of the Solaris OS during the running of the load, and during the quiet periods before and after. You can specify the duration of the quiet period in seconds with the -q argument to the er_kernel command.

Profiling the Kernel and Load Together

If you have a single program that you wish to use as a load, and you are interested in seeing its profile in conjunction with the kernel profile:

1 Collect both a kernel profile and a user profile by typing both the er_kernel command and the collect command:

```
% er kernel collect load
```

2 Analyze the two profiles together by typing:

```
% analyzer ktest.1.er test.1.er
```

The data displayed by the Analyzer shows both the kernel profile from ktest.1.er and the user profile from test.1.er. The timeline allows you to see correlations between the two experiments.

Note – To use a script as the load, and profile the various parts of it, prepend the collect, command, with the appropriate arguments, to the various commands within the script.

Profiling a Specific Process or Kernel Thread

You can invoke the er_kernel utility with one or more -T arguments to specify profiling for specific processes or threads:

- -T pid/ tid for a specific process and kernel-thread
- -T 0/ did for a specific pure-kernel thread

The target threads must have been created before you invoke the er kernel utility for them.

When you give one or more -T arguments, an additional metric, labeled Kthr Time, is produced. Data is captured for all profiled threads, whether running on a CPU or not. Special single-frame call stacks are used for indicating the process is suspended (the function <SLEEPING>) or waiting for the CPU (the function <STALLED>).

Functions with high Kthr Time metrics, but low KCPU Cycles metrics, are functions that are spending a lot of time for the profiled threads waiting for some other events.

Analyzing a Kernel Profile

A few of the recorded fields in kernel experiments have a different meaning from the same fields in user-mode experiments. A user-mode experiment contains data for a single process ID only; a kernel experiment has data that may apply to many different process IDs. To better present that information, some of the field labels in the Analyzer have different meanings in the two types of experiments, as shown in the following table.

TABLE 5-1 Field Label Meanings for Kernel Experiments in the Analyzer

Analyzer Label	Meaning in User-mode Experiments	Meaning in Kernel Experiments	
LWP	User process LWP ID	Process PID; 0 for kernel threads	
Thread	Thread ID within process	Kernel TID; kernel DID for kernel threads	

For example, in an kernel experiment, if you want to filter only a few process IDs, enter the PID(s) of interest in the LWP filter field in the Filter Data dialog box.



The er_print Command Line Performance Analysis Tool

This chapter explains how to use the er_print utility for performance analysis. The er_print utility prints an ASCII version of the various displays supported by the Performance Analyzer. The information is written to standard output unless you redirect it to a file. You must give the er_print utility the name of one or more experiments or experiment groups generated by the Collector as arguments. You can use the er_print utility to display the performance metrics for functions, for callers and callees; the source code listing and disassembly listing; sampling information; data-space data; and execution statistics.

This chapter covers the following topics.

- "er_print Syntax" on page 104
- "Metric Lists" on page 105
- "Commands That Control the Function List" on page 108
- "Commands That Control the Callers-Callees List" on page 110
- "Commands That Control the Leak and Allocation Lists" on page 112
- "Commands That Control the Source and Disassembly Listings" on page 113
- "Commands That Control the Data Space List" on page 117
- "Commands That Control Memory Object Lists" on page 118
- "Commands That Control Index Object Lists" on page 119
- "Commands That Support the Thread Analyzer" on page 121
- "Commands That List Experiments, Samples, Threads, and LWPs" on page 121
- "Commands That Control Filtering of Experiment Data" on page 122
- "Commands That Control Load Object Expansion and Collapse" on page 124
- "Commands That List Metrics" on page 125
- "Commands That Control Output" on page 126
- "Commands That Print Other Information" on page 128
- "Commands That Set Defaults" on page 129
- "Commands That Set Defaults Only For the Performance Analyzer" on page 130
- "Miscellaneous Commands" on page 132
- "Expression Grammar" on page 133
- "er print command Examples" on page 134

For a description of the data collected by the Collector, see Chapter 2, "Performance Data."

For instructions on how to use the Performance Analyzer to display information in a graphical format, see Chapter 4, "The Performance Analyzer Tool" and the online help.

er_print Syntax

The command-line syntax for the er_print utility is:

```
er_print [ -script script | -command | - | -V ] experiment-list
```

The options for the er print utility are:

- Read er print commands entered from the keyboard.

-script script Read commands from the file script, which contains a list of

er_print commands, one per line. If the -script option is not present, er_print reads commands from the terminal or from the

command line.

-command [argument] Process the given command.

-V Display version information and exit.

Multiple options can appear on the er_print command line. They are processed in the order they appear. You can mix scripts, hyphens, and explicit commands in any order. The default action if you do not supply any commands or scripts is to enter interactive mode, in which commands are entered from the keyboard. To exit interactive mode type quit or Ctrl-D.

After each command is processed, any error messages or warning messages arising from the processing are printed. You can print summary statistics on the processing with the procestats command.

The commands accepted by the er print utility are listed in the following sections.

You can abbreviate any command with a shorter string as long as the command is unambiguous. You can split a command into multiple lines by terminating a line with a backslash, \. Any line that ends in \ will have the \ character removed, and the content of the next line appended before the line is parsed. There is no limit, other than available memory, on the number of lines you can use for a command

You must enclose arguments that contain embedded blanks in double quotes. You can split the text inside the quotes across lines.

Metric Lists

Many of the er print commands use a list of metric keywords. The syntax of the list is:

metric-keyword-1[:metric-keyword2...]

For dynamic metrics, those based on measured data, a metric keyword consists of three parts: a metric flavor string, a metric visibility string, and a metric name string. These are joined with no spaces, as follows.

flavorvisibilityname

For static metrics, those based on the static properties of the load objects in the experiment (name, address, and size), a metric keyword consists of a metric name, optionally preceded by a metric visibility string, joined with no spaces:

[visibility]name

The metric *flavor* and metric *visibility* strings are composed of flavor and visibility characters.

The allowed metric flavor characters are given in Table 6–1. A metric keyword that contains more than one flavor character is expanded into a list of metric keywords. For example, ie.user is expanded into i.user:e.user.

TABLE 6-1 Metric Flavor Characters

Character	Description	
е	Show exclusive metric value	
i	Show inclusive metric value	
a	Show attributed metric value (for callers-callees metric only)	
d	Show dynamic metric value (for data-derived metrics only)	

The allowed metric visibility characters are given in Table 6–2. The order of the visibility characters in the visibility string does not matter: it does not affect the order in which the corresponding metrics are displayed. For example, both i%.user and i.%user are interpreted as i.user: i%user.

Metrics that differ only in the visibility are always displayed together in the standard order. If two metric keywords that differ only in the visibility are separated by some other keywords, the metrics appear in the standard order at the position of the first of the two metrics.

TABLE 6-2 Metric Visibility Characters

Character	Description
	Show metric as a time. Applies to timing metrics and hardware counter metrics that measure cycle counts. Interpreted as "+" for other metrics.
%	Show metric as a percentage of the total program metric. For attributed metrics in the callers-callees list, show metric as a percentage of the inclusive metric for the selected function.
+	Show metric as an absolute value. For hardware counters, this value is the event count. Interpreted as a " . " for timing metrics.
!	$Do \ not \ show \ any \ metric \ value. \ Cannot \ be \ used \ in \ combination \ with \ other \ visibility \ characters.$

When both flavor and visibility strings have more than one character, the flavor is expanded first. Thus ie.%user is expanded to i.%user:e.%user, which is then interpreted as i.user:i%user:e.user:e%user.

For static metrics, the visibility characters period (.), plus (+), and percent sign (%), are equivalent for the purposes of defining the sort order. Thus sort i%user, sort i.user, and sort i+user all mean that the Analyzer should sort by inclusive user CPU time if it is visible in any form, and sort i!user means the Analyzer should sort by inclusive user CPU time, whether or not it is visible.

You can use the visibility character exclamation point (!) to override the built-in visibility defaults for each flavor of metric.

If the same metric appears multiple times in the metric list, only the first appearance is processed and subsequent appearances are ignored. If the named metric is not on the list, it is appended to the list.

Table 6–3 lists the available er_print metric name strings for timing metrics, synchronization delay metrics, memory allocation metrics, MPI tracing metrics, and the two common hardware counter metrics. For other hardware counter metrics, the metric name string is the same as the counter name. You can get a list of all the available metric name strings for the loaded experiments with the metric_list command. A list of counter names can be obtained by using the collect command with no arguments. See "Hardware Counter Overflow Profiling Data" on page 26 for more information on hardware counters.

TABLE 6-3 Metric Name Strings

Category	String	Description
Timing metrics	user	User CPU time
	wall	Wall-clock time

Category	String	Description
	total	Total LWP time
	system	System CPU time
	wait	CPU wait time
	ulock	User lock time
	text	Text-page fault time
	data	Data-page fault time
	owait	Other wait time
Synchronization delay metrics	sync	Synchronization wait time
	syncn	Synchronization wait count
MPI tracing metrics	mpitime	Time spent in MPI calls
	mpisend	Number of MPI send operations
	mpibytessent	Number of bytes sent in MPI send operations
	mpireceive	Number of MPI receive operations
	mpibytesrecv	Number of bytes received in MPI receive operations
	mpiother	Number of calls to other MPI functions
Memory allocation metrics	alloc	Number of allocations
	balloc	Bytes allocated
	leak	Number of leaks
	bleak	Bytes leaked
Hardware counter overflow metrics	cycles	CPU cycles
	insts	Instructions issued
Thread Analyzer metrics	raccesses	Data race accesses
	deadlocks	Deadlocks

In addition to the name strings listed in Table 6–3, two name strings can only be used in default metrics lists. These are hwc, which matches any hardware counter name, and any, which matches any metric name string. Also note that cycles and insts are common to SPARC*

platforms and x86 platforms, but other flavors also exist that are architecture-specific. To list all available counters, use the collect command with no arguments.

To see the metrics available from the experiments you have loaded, use the metric_list command.

Commands That Control the Function List

The following commands control how the function information is displayed.

functions

Write the function list with the currently selected metrics. The function list includes all functions in load objects that are selected for display of functions, and any load objects whose functions are hidden with the object select command.

You can limit the number of lines written by using the limit command (see "Commands That Control Output" on page 126).

The default metrics printed are exclusive and inclusive user CPU time, in both seconds and percentage of total program metric. You can change the current metrics displayed with the metrics command, which you must issue before you issue the functions command. You can also change the defaults with the dmetrics command in an .er.rc file.

For applications written in the Java programming language, the displayed function information varies depending on whether the View mode is set to user, expert, or machine.

- User mode shows each method by name, with data for interpreted and HotSpot-compiled methods aggregated together; it also suppresses data for non-user-Java threads.
- Expert mode separates HotSpot-compiled methods from interpreted methods, and does not suppress non-user Java threads.
- Machine mode shows data for interpreted Java methods against the Java Virtual Machine (JVM) software as it does the interpreting, while data for methods compiled with the Java HotSpot virtual machine is reported for named methods. All threads are shown.

In all three modes, data is reported in the usual way for any C, C++, or Fortran code called by a Java target.

metrics metric_spec

Specify a selection of function-list metrics. The string *metric_spec* can either be the keyword default, which restores the default metric selection, or a list of metric keywords, separated by colons. The following example illustrates a metric list.

% metrics i.user:i%user:e.user:e%user

This command instructs the er print utility to display the following metrics:

- Inclusive user CPU time in seconds
- Inclusive user CPU time percentage
- Exclusive user CPU time in seconds
- Exclusive user CPU time percentage

By default, the metric setting used is based on the dmetrics command, processed from .er.rc files, as described in "Commands That Set Defaults" on page 129. If a metrics command explicitly sets *metric_spec* to default, the default settings are restored as appropriate to the data recorded.

When metrics are reset, the default sort metric is set in the new list.

If *metric_spec* is omitted, the current metrics setting is displayed.

In addition to setting the metrics for the function list, the metrics command sets metrics for caller-callees and metrics for data-derived output to the same settings. See "cmetrics metric_spec" on page 111 and "data_metrics metric_spec" on page 117 for further information.

When the metrics command is processed, a message is printed showing the current metric selection. For the preceding example the message is as follows.

```
current: i.user:i%user:e.user:e%user:name
```

For information on the syntax of metric lists, see "Metric Lists" on page 105. To see a listing of the available metrics, use the metric list command.

If a metrics command has an error in it, it is ignored with a warning, and the previous settings remain in effect.

sort metric_spec

Sort the function list on *metric_spec*. The *visibility* in the metric name does not affect the sort order. If more than one metric is named in the *metric_spec*, use the first one that is visible. If none of the metrics named are visible, ignore the command. You can precede the *metric_spec* with a minus sign (-) to specify a reverse sort.

By default, the metric sort setting is based on the dsort command, processed from .er.rc files, as described in "Commands That Set Defaults" on page 129. If a sort command explicitly sets *metric_spec* to default, the default settings are used.

The string *metric_spec* is one of the metric keywords described in "Metric Lists" on page 105, as shown in this example.

```
% sort i.user
```

This command tells the er_print utility to sort the function list by inclusive user CPU time. If the metric is not in the experiments that have been loaded, a warning is printed and the command is ignored. When the command is finished, the sort metric is printed.

fsummary

Write a summary panel for each function in the function list. You can limit the number of panels written by using the limit command (see "Commands That Control Output" on page 126).

The summary metrics panel includes the name, address and size of the function or load object, and for functions, the name of the source file, object file and load object, and all the recorded metrics for the selected function or load object, both exclusive and inclusive, as values and percentages.

fsingle function_name [N]

Write a summary panel for the specified function. The optional parameter N is needed for those cases where there are several functions with the same name. The summary metrics panel is written for the Nth function with the given function name. When the command is given on the command line, N is required; if it is not needed it is ignored. When the command is given interactively without N but N is required, a list of functions with the corresponding N value is printed.

For a description of the summary metrics for a function, see the fsummary command description.

Commands That Control the Callers-Callees List

The following commands control how the caller and callee information is displayed.

callers-callees

Print the callers-callees panel for each of the functions, in the order specified by the function sort metric (sort).

Within each caller-callee report, the callers and callees are sorted by the caller-callee sort metrics (csort). You can limit the number of panels written by using the limit command (see "Commands That Control Output" on page 126). The selected (center) function is marked with an asterisk, as shown in this example.

Attr.	Excl.	Incl.	Name
User CPU	User CPU	User CPU	
sec.	sec.	sec.	
4.440	0.	42.910	commandline
0.	0.	4.440	*gpf
4.080	0.	4.080	gpf_b
0.360	0.	0.360	gpf_a

In this example, gpf is the selected function; it is called by commandline, and it calls gpf_a and gpf b.

cmetrics metric_spec

Specify a selection of callers-callees metrics. By default, the caller-callee metrics is set to match the function list metrics whenever they are changed. If *metric_spec* is omitted, the current caller-callee metrics setting is displayed.

The string *metric_spec* is one of the metric keywords described in "Metric Lists" on page 105, as shown in this example.

```
% cmetrics i.%user:a.%user
```

This command instructs er print to display the following metrics.

- Inclusive user CPU time in seconds
- Inclusive user CPU time percentage
- Attributed user CPU time in seconds
- Attributed user CPU time percentage

When the cmetrics command is finished, a message is printed showing the current metric selection. For the preceding example the message is as follows.

```
current: i.%user:a.%user:name
```

By default, the caller-callee metrics are set to match the function list metrics whenever the function list metrics are changed.

Caller-callee attributed metrics are inserted in front of the corresponding exclusive metric and inclusive metric, with *visibility* corresponding to the logical or of the *visibility* setting for those two. Static metric settings are copied to the caller-callee metrics. If the *metric-name* is not in the list, it is appended to it.

A list of all the available *metric-name* values for the experiments loaded can be obtained with the cmetric_list command.

If a cmetrics command has an error in it, it is ignored with a warning, and the previous settings remain in effect.

csingle function_name [N]

Write the callers-callees panel for the named function. The optional parameter N is needed for those cases where there are several functions with the same name. The callers-callees panel is written for the Nth function with the given function name. When the command is given on the command line, N is required; if it is not needed it is ignored. When the command is given interactively without N but N is required, a list of functions with the corresponding N value is printed.

csort metric_spec

Sort the callers-callees display by the specified metric. The string *metric_spec* is one of the metric keywords described in "Metric Lists" on page 105, as shown in this example.

% csort a.user

If *metric-spec* is omitted, the current callers-callees sort metric is displayed.

The csort metric must be either an attributed metric, or a static metric. If multiple metrics are specified, sort by the first visible one that matches.

Whenever metrics are set, either explicitly or by default, the caller-callee sort metric is set based on the function metrics as follows:

- If sorting is by a dynamic metric, either inclusive or exclusive, sort by the corresponding attributed metric.
- If sorting is by a static metric, sort by it.

This command tells the er_print utility to sort the callers-callees display by attributed user CPU time. When the command finishes, the sort metric is printed.

Commands That Control the Leak and Allocation Lists

This section describes the commands that relate to memory allocations and deallocations.

leaks

Display a list of memory leaks, aggregated by common call stack. Each entry presents the total number of leaks and the total bytes leaked for the given call stack. The list is sorted by the number of bytes leaked.

allocs

Display a list of memory allocations, aggregated by common call stack. Each entry presents the number of allocations and the total bytes allocated for the given call stack. The list is sorted by the number of bytes allocated.

Commands That Control the Source and Disassembly Listings

The following commands control how annotated source and disassembly code is displayed.

pcs

Write a list of program counters (PCs) and their metrics, ordered by the current sort metric. The list includes lines that show aggregated metrics for each load object whose functions are hidden with the object select command.

psummary

Write the summary metrics panel for each PC in the PC list, in the order specified by the current sort metric.

lines

Write a list of source lines and their metrics, ordered by the current sort metric. The list includes lines that show aggregated metrics for each function that does not have line-number information, or whose source file is unknown, and lines that show aggregated metrics for each load object whose functions are hidden with the object select command.

lsummary

Write the summary metrics panel for each line in the lines list, in the order specified by the current sort metric.

source { filename | function_name } [N]

Write out annotated source code for either the specified file or the file containing the specified function. The file in either case must be in a directory in your path. If the source was compiled with the GNU Fortran compiler, you must add two underscore characters after the function name as it appears in the source.

Use the optional parameter N (a positive integer) only in those cases where the file or function name is ambiguous; in this case, the Nth possible choice is used. If you give an ambiguous name without the numeric specifier the er_print utility prints a list of possible object-file names; if the name you gave was a function, the name of the function is appended to the object-file name, and the number that represents the value of N for that object file is also printed.

The function name can also be specified as *function*" file", where *file* is used to specify an alternate source context for the function. Immediately following the first instruction, an index line is added for the function. Index lines are displayed as text within angle brackets in the following form:

<Function: f_name>

The default source context for any function is defined as the source file to which the first instruction in that function is attributed. It is normally the source file compiled to produce the object module containing the function. Alternate source contexts consist of other files that contain instructions attributed to the function. Such contexts include instructions coming from include files and instructions from functions inlined into the named function. If there are any alternate source contexts, include a list of extended index lines at the beginning of the default source context to indicate where the alternate source contexts are located in the following form:

<Function: f, instructions from source file src.h>

Note – If you use the -source argument when invoking the er_print utility on the command line, the backslash escape character must prepend the file quotes. In other words, the function name is of the form function\"file\". The backslash is not required, and should not be used, when the er_print utility is in interactive mode.

Normally when the default source context is used, metrics are shown for all functions from that file. Referring to the file explicitly shows metrics only for the named function.

disasm { filename | function_name } [N]

Write out annotated disassembly code for either the specified file, or the file containing the specified function. The file must be in a directory in your path.

The optional parameter N is used in the same way as for the source command.

scc com_spec

Specify the classes of compiler commentary that are shown in the annotated source listing. The class list is a colon-separated list of classes, containing zero or more of the following message classes.

TABLE 6-4 Compiler Commentary Message Classes

Class	Meaning	
b[asic]	Show the basic level messages.	
v[ersion]	Show version messages, including source file name and last modified date, versions of the compiler components, compilation date and options.	
pa[rallel]	Show messages about parallelization.	
q[uery]	Show questions about the code that affect its optimization.	
l[oop]	Show messages about loop optimizations and transformations.	
pi[pe]	Show messages about pipelining of loops.	
i[nline]	Show messages about inlining of functions.	
m[emops]	Show messages about memory operations, such as load, store, prefetch.	
f[e]	Show front-end messages.	
all	Show all messages.	
none	Do not show any messages.	

The classes all and none cannot be used with other classes.

If no scc command is given, the default class shown is basic. If the scc command is given with an empty *class-list*, compiler commentary is turned off. The scc command is normally used only in an .er.rc file.

sthresh value

Specify the threshold percentage for highlighting metrics in the annotated source code. If the value of any metric is equal to or greater than *value* % of the maximum value of that metric for any source line in the file, the line on which the metrics occur have ## inserted at the beginning of the line.

dcc com_spec

Specify the classes of compiler commentary that are shown in the annotated disassembly listing. The class list is a colon-separated list of classes. The list of available classes is the same as the list of classes for annotated source code listing shown in Table 6-4. You can add the following options to the class list.

TABLE 6-5 Additional Options for the dcc Command

Option	Meaning	
h[ex]	Show the hexadecimal value of the instructions.	
noh[ex]	Do not show the hexadecimal value of the instructions.	
s[rc]	Interleave the source listing in the annotated disassembly listing.	
nos[rc]	Do not interleave the source listing in the annotated disassembly listing.	
as[rc]	Interleave the annotated source code in the annotated disassembly listing.	

dthresh value

Specify the threshold percentage for highlighting metrics in the annotated disassembly code. If the value of any metric is equal to or greater than *value* % of the maximum value of that metric for any instruction line in the file, the line on which the metrics occur have ## inserted at the beginning of the line.

cc com_spec

Specify the classes of compiler commentary that are shown in the annotated source and disassembly listing. The class list is a colon-separated list of classes. The list of available classes is the same as the list of classes for annotated source code listing shown in Table 6–4.

setpath path_list

Set the path used to find source, object, etc. files. *path_list* is a colon-separated list of directories. If any directory has a colon character in it, escape it with a backslash. The special directory name, \$expts, refers to the set of current experiments, in the order in which they were loaded; you can abbreviate it with a single \$ character.

The default setting is: \$expts:.. The compiled-in full pathname is used if a file is not found in searching the current path setting.

setpath with no argument prints the current path.

addpath path_list

Append *path_list* to the current setpath settings.

pathmap old-prefix new-prefix

If a file cannot be found using the *path_list* set by addpath or setpath, you can specify one or more path remappings with the pathmap command. In any pathname for a source file, object file, or shared object that begins with the prefix specified with *old-prefix*, the old prefix is replaced by the prefix specified with *new-prefix*. The resulting path is then used to find the file. Multiple pathmap commands can be supplied, and each is tried until the file is found.

Commands That Control the Data Space List

Data space commands are applicable only to hardware counter experiments where aggressive backtracking was specified, and for objects in files that were compiled with the -xhwcprof option, which is available on SPARC platforms. See the Sun Studio 12: Fortran User's Guide, Sun Studio 12: C User's Guide, or the Sun Studio 12: C++ User's Guide for further information.

data objects

Write the list of data objects with their metrics.

data single name[N]

Write the summary metrics panel for the named data object. The optional parameter N is needed for those cases where the object name is ambiguous. When the directive is on the command-line, N is required; if it is not needed, it is ignored.

data layout

Write the annotated data object layouts for all program data objects with data-derived metric data, sorted by the current data sort metric values for the structures as a whole. Each aggregate data object is shown with the total metrics attributed to it, followed by all of its elements in offset order, each with their own metrics and an indicator of its size and location relative to 32-byte blocks.

data metrics *metric_spec*

Set the data-derived metrics. The *metric_spec* is defined in "Metric Lists" on page 105.

By default, the data-derived metrics are set to match the function list metrics whenever they are changed. The data-derived metrics corresponding to any visible exclusive metric or inclusive metric that has a data-derived flavor, are set with *visibility* corresponding to the logical or of the *visibility* setting for those two.

Static metric settings are copied to the data-derived metrics. If the metric name is not in the list, the metric name is appended to the list.

If *metric_spec* is omitted, the current data-derived metrics setting is displayed.

A list of all the available *metric-name* values for the experiments loaded can be obtained with the data metric list command.

If the *metric_spec* has any errors, it is ignored, and the data-derived metrics are left unchanged.

data sort

Set the sort metric for data objects. The prefix d is needed for dynamic metrics, but may be omitted for static metrics. The data_sort metric must be either a data-derived metric or a static metric.

If multiple metrics are specified, sort by the first visible one that matches. Whenever metrics are set, either explicitly or by default, set the data-derived sort metric based on the function metrics:

- If sorting is by a dynamic metric, either inclusive or exclusive, that has a corresponding data-derived flavor, sort by the corresponding data-derived metric.
- If sorting is by an inclusive or exclusive metric that does not have a data-derived flavor, sort by the first visible data-derived metric.
- If sorting is by a static metric, sort by it.

Commands That Control Memory Object Lists

Memory object commands are applicable only to hardware counter experiments where aggressive backtracking was specified, and for objects in files that were compiled with the -xhwcprof option, which is available on SPARC platforms. See the *Sun Studio 12: Fortran User's Guide*, the *Sun Studio 12: C User's Guide*, or the *Sun Studio 12: C++ User's Guide* for further information.

Memory objects are components in the memory subsystem, such as cache lines, pages, and memory banks. The object is determined from an index computed from the virtual or physical address as recorded. Memory objects are predefined for virtual and physical pages, for sizes of 8KB, 64KB, 512KB, and 4 MB. You can define others with the mobj_define command.

The following commands control the memory object lists.

memobj *mobj_type*

Write the list of the memory objects of the given type with the current metrics. Metrics used and sorting as for the data space list. You can also use the name *mobj_type* directly as the command.

mobj list

Write the list of known types of memory objects, as used for *mobj_type* in the memobj command.

mobj_define mobj_type index_exp

Define a new type of memory objects with a mapping of VA/PA to the object given by the *index_exp*. The syntax of the expression is described in "Expression Grammar" on page 133.

The *mobj_type* must not already be defined. Its name must be entirely composed of alphanumeric characters or the 'character, and begin with an alphabetic character.

The *index_exp* must be syntactically correct. If it is not syntactically correct, an error is returned and the definition is ignored.

The <Unknown> memory object has an index of -1, and the expression used to define a new memory object should support recognizing <Unknown>. For example, for VADDR-based objects, the expression should be of the following form:

VADDR>255?expression:-1

and for PADDR-based objects, the expression should be of the following form:

PADDR>0?expression: -1

Commands That Control Index Object Lists

Index objects commands are applicable to all experiments. An index object list is a list of objects for whom an index can be computed from the recorded data. Index objects are predefined for Threads, Cpus, Samples, and Seconds. You can define other index objects with the indxobj_define command.

The following commands control the index-object lists.

indxobj *indxobj_type*

Write the list of the index objects that match the given type, along with their metrics. Metrics and sorting for index objects is the same as those for the function list, but containing exclusive metrics only. The name <code>indxobj_type</code> can also be used directly as the command.

indxobj list

Write the list of known types of index objects, as used for *indxobj_type* in the indxobj command.

indxobj define indxobj_type index_exp

Define a new type of index object with a mapping of packets to the object given by the *index_exp*. The syntax of the expression is described in "Expression Grammar" on page 133.

The *indxobj_type* must not already be defined. Its name is case-insensitive, must be entirely composed of alphanumeric characters or the '_' character, and begin with an alphabetic character.

The *index_exp* must be syntactically correct, or an error is returned and the definition is ignored. If the *index_exp* contains any blanks, it must be surrounded by double quotes (").

The <Unknown> index object has an index of -1, and the expression used to define a new index object should support recognizing <Unknown>.

For example, for index objects based on virtual or physical PC, the expression should be of the following form:

VIRTPC>0?VIRTPC:-1

indxobj metrics metric_spec

Specify a selection of metrics for index objects. The *metric_spec* may only contain exclusive metrics and static metrics, since index objects are not hierarchical.

For information on the syntax of metric lists, see "Metric Lists" on page 105. To see a listing of the available metrics, use the metric list command.

indxobj_sort metric_spec

Sort the index object lists by the specified metric. The indxobj_sort metric must be either an exclusive metric or a static metric. If multiple metrics are specified, sort is done according to the first visible one that matches.

Commands That Support the Thread Analyzer

The following commands are in support of the Thread Analyzer. See the *Sun Studio 12: Thread Analyzer User's Guide* for more information about the data captured and shown.

races

Writes a list of all dataraces in the experiments. Data-race reports are available only from experiments with data-race-detection data.

rdetail race id

Writes the detailed information for the given *race_id*. If the *race_id* is set to all, detailed information for all dataraces is shown. Data-race reports are available only from experiments with data-race-detection data.

deadlocks

Writes a list of all detected real and potential deadlocks in the experiments. Deadlock reports are available only from experiments with deadlock-detection data.

ddetail deadlock_id

Writes the detailed information for the given *deadlock_id*. If the *deadlock_id* is set to all, detailed information for all deadlocks is shown. Deadlock reports are available only from experiments with deadlock-detection data.

Commands That List Experiments, Samples, Threads, and LWPs

This section describes the commands that list experiments, samples, threads, and LWPs.

experiment_list

Display the full list of experiments loaded with their ID number. Each experiment is listed with an index, which is used when selecting samples, threads, or LWPs, and a PID, which can be used for advanced filtering.

The following example shows an experiment list.

sample_list

Display the list of samples currently selected for analysis.

The following example shows a sample list.

lwp list

Display the list of LWPs currently selected for analysis.

thread list

Display the list of threads currently selected for analysis.

cpu list

Display the list of CPUs currently selected for analysis.

Commands That Control Filtering of Experiment Data

You can specify filtering of experiment data in two ways:

- By specifying a filter expression, which is evaluated for each data record to determine whether or not the record should be included
- By selecting experiments, samples, threads, CPUs, and LWPs for filtering

Specifying a Filter Expression

You can specify a filter expression with the filters command.

```
filters filter_exp
```

filter_exp is an expression that evaluates as true for any data record that should be included, and false for records that should not be included. The grammar of the expression is described in "Expression Grammar" on page 133.

Selecting Samples, Threads, LWPs, and CPUs for Filtering

Selection Lists

The syntax of a selection is shown in the following example. This syntax is used in the command descriptions.

```
[experiment-list:]selection-list[+[experiment-list:]selection-list ...]
```

Each selection list can be preceded by an experiment list, separated from it by a colon and no spaces. You can make multiple selections by joining selection lists with a + sign.

The experiment list and the selection list have the same syntax, which is either the keyword all or a list of numbers or ranges of numbers (n-m) separated by commas but no spaces, as shown in this example.

```
2,4,9-11,23-32,38,40
```

The experiment numbers can be determined by using the exp list command.

Some examples of selections are as follows.

```
1:1-4+2:5,6
all:1,3-6
```

In the first example, objects 1 through 4 are selected from experiment 1 and objects 5 and 6 are selected from experiment 2. In the second example, objects 1 and 3 through 6 are selected from all experiments. The objects may be LWPs, threads, or samples.

Selection Commands

The commands to select LWPs, samples, CPUs, and threads are not independent. If the experiment list for a command is different from that for the previous command, the experiment list from the latest command is applied to all three selection targets— LWPs, samples, and threads, in the following way.

- Existing selections for experiments not in the latest experiment list are turned off.
- Existing selections for experiments in the latest experiment list are kept.
- Selections are set to all for targets for which no selection has been made.

sample_select sample_spec

Select the samples for which you want to display information. The list of samples you selected is displayed when the command finishes.

lwp select lwp_spec

Select the LWPs about which you want to display information. The list of LWPs you selected is displayed when the command finishes.

thread_select thread_spec

Select the threads about which you want to display information. The list of threads you selected is displayed when the command finishes.

cpu select cpu_spec

Select the CPUs about which you want to display information. The list of CPUs you selected is displayed when the command finishes.

Commands That Control Load Object Expansion and Collapse

object list

Display a two-column list showing the status and names of available load objects. The expansion status of each load object is shown in the first column, and the name of the object is shown in the second column. The name of each load object is preceded either by a yes that indicates that the functions of that object are shown in the function list (expanded), or by a no that indicates that the functions of that object are not shown in the function list (collapsed). All functions for a collapsed load object map to a single entry in the function list representing the entire load object.

The following is an example of a load object list.

```
(er print) object list
Sel Load Object
no Inknown>
yes <Freeway>
yes <libCstd isa.so.1>
yes <libnsl.so.1>
ves <libmp.so.2>
yes <libc.so.1>
ves <libICE.so.6>
yes <libSM.so.6>
yes <libm.so.1>
ves <libCstd.so.1>
yes <libX11.so.4>
yes <libXext.so.0>
yes <libCrun.so.1>
ves <libXt.so.4>
ves <libXm.so.4>
yes <libsocket.so.1>
yes <libgen.so.1>
yes <libcollector.so>
yes <libc psr.so.1>
yes <ld.so.1>
yes <liblayout.so.1>
```

object select object1,object2,...

Select the load objects for which you want to display information about the functions in the load object. *object-list* is a list of load objects, separated by commas but no spaces. If a load object is selected, its functions are expanded, and all functions that have non-zero metrics are shown in the function list. If a load object is not selected, its functions are collapsed, and only a single line with metrics for the entire load object instead of its individual functions is displayed.

The names of the load objects should be either full path names or the basename. If an object name itself contains a comma, you must surround the name with double quotation marks.

Commands That List Metrics

The following commands list the currently selected metrics and all available metric keywords.

metric list

Display the currently selected metrics in the function list and a list of metric keywords that you can use in other commands (for example, metrics and sort) to reference various types of metrics in the function list.

cmetric list

Display the currently selected metrics in the callers-callees list and a list of metric keywords that you can use in other commands (for example, cmetrics and csort) to reference various types of metrics in the callers-callees list.

Note – Attributed metrics can be specified for display only with the cmetrics command, not the metrics command or the data_metrics command, and displayed only with the callers-callees command, not the functions command or data_objects command.

data metric list

Display the currently selected data-derived metrics and a list of metrics and keyword names for all data-derived reports. Display the list in the same way as the output for the metric_list command, but include only those metrics that have a data-derived flavor and static metrics.

Note – Data-derived metrics can be specified for display only with the data_metrics command, not the metrics command or the cmetrics command, and displayed only with the data objects command, not the functions command or callers-callees command

indx metric list

Display the currently selected index-object metrics. Display the list in the same way as the metric_list command, but include only those metrics that have an exclusive flavor, and static metrics.

Commands That Control Output

The following commands control er_print display output.

outfile { filename | - }

Close any open output file, then open *filename* for subsequent output. When opening *filename*, clear any pre-existing content. If you specify a dash (-) instead of *filename*, output is written to standard output. If you specify two dashes (--) instead of *filename*, output is written to standard error.

appendfile filename

Close any open output file and open *filename*, preserving any pre-existing content, so that subsequent output is appended to the end of the file. If *filename* does not exist, the functionality of the appendfile command is the same as for the outfile command.

limit n

Limit output to the first *n* entries of the report; *n* is an unsigned positive integer.

```
name { long | short } [ :{ shared_object_name |
no_shared_object_name } ]"
```

Specify whether to use the long or the short form of function names (C++ and Java only). If *shared_object_name* is specified, append the shared-object name to the function name.

viewmode { user | expert | machine }

Set the mode to one of the following:

user

For Java experiments, show the Java call stacks for Java threads, and do not show housekeeping threads. The function list includes a function <JVM-System> representing aggregated time from non-Java threads. When the JVM software does not report a Java call stack, time is reported against the function <no Java callstack recorded>.

For OpenMP experiments, show master-thread call stacks and slave thread call stacks reconciled, and add special functions, with the names of form <OMP-*>, when the OpenMP runtime is performing certain operations.

expert

For Java experiments, show the Java call stacks for Java threads when the user's Java code is being executed, and machine call stacks when JVM code is being executed or when the JVM software does not report a Java call stack. Show the machine call stacks for housekeeping threads.

For OpenMP experiments, show the same information as for user mode.

machine

For Java experiments and OpenMP experiments, show the machine call stacks for all threads.

For all experiments other than Java experiments and OpenMP experiments, all three modes show the same data.

Commands That Print Other Information

header exp_id

Display descriptive information about the specified experiment. The *exp_id* can be obtained from the exp_list command. If the *exp_id* is all or is not given, the information is displayed for all experiments loaded.

Following each header, any errors or warnings are printed. Headers for each experiment are separated by a line of dashes.

If the experiment directory contains a file named notes, the contents of that file are prepended to the header information. A notes file may be manually added or edited or specified with -C " comment" arguments to the collect command.

exp_id is required on the command line, but not in a script or in interactive mode.

ifreq

Write a list of instruction frequency from the measured count data. The instruction frequency report can only be generated from count data. This command applies only on SPARC processors running the Solaris OS.

objects

List the load objects with any error or warning messages that result from the use of the load object for performance analysis. The number of load objects listed can be limited by using the limit command (see "Commands That Control Output" on page 126).

overview exp_id

Write out the sample data of each of the currently selected samples for the specified experiment. The exp_id can be obtained from the exp_list command. If the exp_id is all or is not given, the sample data is displayed for all experiments. exp_id is required on the command line, but not in a script or in interactive mode.

statistics exp_id

Write out execution statistics, aggregated over the current sample set for the specified experiment. For information on the definitions and meanings of the execution statistics that are presented, see the getrusage(3C) and proc(4) man pages. The execution statistics include statistics from system threads for which the Collector does not collect any data.

The *exp_id* can be obtained from the experiment_list command. If the *exp_id* is not given, the sum of data for all experiments is displayed, aggregated over the sample set for each experiment. If *exp_id* is all, the sum and the individual statistics for each experiment are displayed.

Commands That Set Defaults

You can use the following commands to set the defaults for er_print and for the Performance Analyzer. You can use these commands only for setting defaults: they cannot be used as input for the er_print utility. They can be included in a defaults file named .er.rc.Commands that apply only to defaults for the Performance Analyzer are described in "Commands That Set Defaults Only For the Performance Analyzer" on page 130.

You can include a defaults file in your home directory to set defaults for all experiments, or in any other directory to set defaults locally. When the er_print utility, the er_src utility, or the Performance Analyzer is started, the current directory and your home directory are scanned for defaults files, which are read if they are present, and the system defaults file is also read. Defaults from the .er.rc file in your home directory override the system defaults, and defaults from the .er.rc file in the current directory override both home and system defaults.

Note – To ensure that you read the defaults file from the directory where your experiment is stored, you must start the Performance Analyzer or the er print utility from that directory.

The defaults file can also include the scc, sthresh, dcc, dthresh, cc, setpath, addpath, pathmap, name, mobj_define, indxobj_define, tabs, rtabs, and viewmode commands. You can include multiple dmetrics, dsort, addpath, pathmap, mobj_define, and indxobj_define commands in a defaults file, and the commands from all .er.rc files are concatenated. For all other commands, the first appearance of the command is used and subsequent appearances are ignored.

dmetrics metric_spec

Specify the default metrics to be displayed or printed in the function list. The syntax and use of the metric list is described in the section "Metric Lists" on page 105. The order of the metric

keywords in the list determines the order in which the metrics are presented and the order in which they appear in the Metric chooser in the Performance Analyzer.

Default metrics for the Callers-Callees list are derived from the function list default metrics by adding the corresponding attributed metric before the first occurrence of each metric name in the list.

dsort *metric_spec*

Specify the default metric by which the function list is sorted. The sort metric is the first metric in this list that matches a metric in any loaded experiment, subject to the following conditions:

- If the entry in metric_spec has a visibility string of an exclamation point, !, the first metric
 whose name matches is used, whether it is visible or not.
- If the entry in metric_spec has any other visibility string, the first visible metric whose name matches is used.

The syntax and use of the metric list is described in the section "Metric Lists" on page 105.

The default sort metric for the Callers-Callees list is the attributed metric corresponding to the default sort metric for the function list.

Set the mode for reading descendant experiments to on (enable all descendants) or off (disable all descendants). If the =*regexp* is used, enable data from those experiments whose lineage or executable name matches the regular expression.

Commands That Set Defaults Only For the Performance Analyzer

tabs tab_spec

Set the default set of tabs to be visible in the Analyzer. The tabs are named by the er_print command that generates the corresponding reports, including <code>mobj_type</code> for MemoryObject tabs or <code>indxobj_type</code> for IndexObject tabs. <code>timeline</code> specifies the Timeline tab, and <code>headers</code> specifies the Experiments tab.

Only those tabs that are supported by the data in the loaded experiments are shown.

rtabs tab_spec

Set the default set of tabs to be visible when the Analyzer is invoked with the tha command, for examining Thread Analyzer experiments. Only those tabs that are supported by the data in the loaded experiments are shown.

tlmode *tl_mode*

Set the display mode options for the Timeline tab of the Performance Analyzer. The list of options is a colon-separated list. The allowed options are described in the following table.

TABLE 6-6 Timeline Display Mode Options

Option	Meaning	
lw[p]	Display events for LWPs	
t[hread]	Display events for threads	
c[pu]	Display events for CPUs	
r[oot]	Align call stack at the root	
le[af]	Align call stack at the leaf	
d[epth] nn	Set the maximum depth of the call stack that can be displayed	

The options lwp, thread, and cpu are mutually exclusive, as are root and leaf. If more than one of a set of mutually exclusive options is included in the list, the last one is the only one that is used.

tldata tl_data

Select the default data types shown in the Timeline tab of the Performance Analyzer. The types in the type list are separated by colons. The allowed types are listed in the following table.

TABLE 6-7 Timeline Display Data Types

Туре	Meaning	
sa[mple]	Display sample data	
c[lock]	Display clock profiling data	
hw[c]	Display hardware counter profiling data	

TABLE 6-7 Timeline Disp	olay Data Types (Continued)
Туре	Meaning
sy[nctrace]	Display thread synchronization tracing data
mp[itrace]	Display MPI tracing data
he[aptrace]	Display heap tracing data

Miscellaneous Commands

mapfile load-object { mapfilename | - }

Write a mapfile for the specified load object to the file *mapfilename*. If you specify a dash (-) instead of *mapfilename*, er print writes the mapfile to standard output.

procstats

Print the accumulated statistics from processing data.

script file

Process additional commands from the script file file.

version

Print the current release number of the er_print utility

quit

Terminate processing of the current script, or exit interactive mode.

help

Print a list of er_print commands.

Expression Grammar

A common grammar is used for an expression defining a filter and an expression used to compute a memory object index.

The grammar specifies an expression as a combination of operators and operands. For filters, if the expression evaluates to true, the packet is included; if the expression evaluates to false, the packet is excluded. For memory objects or index objects, the expression is evaluated to an index that defines the particular memory object or index object referenced in the packet.

Operands in an expression are either constants, or fields within a data record, including THRID, LWPID, CPUID, STACK, LEAF, VIRTPC, PHYSPC, VADDR, PADDR, DOBJ, TSTAMP, SAMPLE, EXPID, PID, or the name of a memory object. Operators include the usual logical operators and arithmetic (including shift) operators, in C notation, with C precedence rules, and an operator for determining whether an element is in a set (IN) or whether any or all of a set of elements is contained in a set (SOME IN or IN, respectively). If-then-else constructs are specified as in C, with the ? and : operators. Use parentheses to ensure proper parsing of all expressions. On the er_print command lines, the expression cannot be split across lines. In scripts or on the command line, the expression must be inside double quotes if it contains blanks.

Filter expressions evaluate to a boolean value, true if the packet should be included, and false if it should not be included. Thread, LWP, CPU, experiment-id, process-pid, and sample filtering are based on a relational expression between the appropriate keyword and an integer, or using the IN operator and a comma-separated list of integers.

Time-filtering is used by specifying one or more relational expressions between TSTAMP and a time, given in integer nanoseconds from the start of the experiment whose packets are being processed. Times for samples can be obtained using the overview command. Times in the overview command are given in seconds, and must be converted to nanoseconds for time-filtering. Times can also be obtained from the Timeline display in the Analyzer.

Function filtering can be based either on the leaf function, or on any function in the stack. Filtering by leaf function is specified by a relational expression between the LEAF keyword and an integer function id, or using the IN operator and the construct FNAME (" regexp"), where regexp is a regular expression as specified on the regexp(5) man page. The entire name of the function, as given by the current setting of name, must match.

Filtering based on any function in the call stack is specified by determining if any function in the construct FNAME ("regexp") is in the array of functions represented by the keyword STACK: (FNAME ("myfunc") SOME IN STACK).

Data object filtering is analogous to stack function filtering, using the DOBJ keyword and the construct DNAME (" regexp") enclosed in parentheses.

Memory object filtering is specified using the name of the memory object, as shown in the mobj_list command, and the integer index of the object, or the indices of a set of objects. (The <Unknown> memory object has index -1.)

Index object filtering is specified using the name of the index object, as shown in the indxobj_list command, and the integer index of the object, or the indices of a set of objects. (The <Unknown> index object has index -1.)

Data object filtering and memory object filtering are meaningful only for hardware counter packets with dataspace data; all other packets are excluded under such filtering.

Direct filtering of virtual addresses or physical addresses is specified with a relational expression between VADDR or PADDR, and the address.

Memory object definitions (see "mobj_define mobj_type index_exp" on page 119) use an expression that evaluates to an integer index, using either the VADDR keyword or PADDR keyword. The definitions are applicable only to hardware counter packets for memory counters and dataspace data. The expression should return an integer, or -1 for the <Unknown> memory object.

Index object definitions (see "indxobj_define indxobj_type index_exp" on page 120) use an expression that evaluates to an integer index. The expression should return an integer, or -1 for the <Unknown> index object.

er_print command Examples

The following example generates a gprof-like list from an experiment. The output is a file named er_print.out which lists the top 100 functions, followed by caller-callee data, sorted by attributed user time for each.

```
er_print -outfile er_print.out -metrics e.%user \
-sort e.user -limit 100 -functions -cmetrics a.user \
-csort a.user -callers-callees test.1.er
```

You can also simplify this example into the following independent commands. However, keep in mind that each call to er_print in a large experiment or application can be time intensive:

```
er_print -metrics e.%user -sort e.user \
-limit 100 -functions test.1.er

er_print -cmetrics a.%user -csort a.user \
-callers-callees test.1.er
```

This example summarizes how time is spent in functions.

```
er_print -functions test.*.er
```

This example shows the caller-callee relationships.

```
er_print -callers-callees test.*.er
```

■ This example shows which source lines are hot. Source-line information assumes the code was compiled and linked with -g. Append a trailing underscore to the function name for Fortran functions and routines. The 1 after the function name is used to distinguish between multiple instances of myfunction.

```
er print -source myfunction 1 test.*.er
```

This example shows only the compiler commentary. It is not necessary to run your program
in order to use this command.

```
er src -myfile.o
```

These examples use wall-clock profiling to list functions and callers-callees.

```
er_print -metrics ei.%wall -functions test.*.er
er_print -cmetrics aei.%wall -callers-callees test.*.er
```

• This example shows how to run a script containing er print commands.

```
er_print -script myscriptfile test.1.er
```

The myscriptfile script contains er_print commands. A sample of the script file contents follows:

```
## myscriptfile
## Send script output to standard output
outfile -
## Display descriptive information about the experiments
header
## Write out the sample data for all experiments
overview
## Write out execution statistics, aggregated over
## the current sample set for all experiments
statistics
## List functions
functions
## Display status and names of available load objects
object_list
## Write out annotated disassembly code for systime,
## to file disasm.out
```

```
outfile disasm.out
disasm systime

## Write out annotated source code for synprog.c
## to file source.out
outfile source.out
source synprog.c

## Terminate processing of the script
quit
```

This example shows high-level MPI functions. MPI has many internal software layers, but this example shows one way to see just the entry points. There might be some duplicates of symbols, which you can ignore.

```
er_print -functions test.*.er | grep PMPI_
```

◆ ◆ ◆ CHAPTER 7

Understanding the Performance Analyzer and Its Data

The Performance Analyzer reads the event data that is collected by the Collector and converts it into performance metrics. The metrics are computed for various elements in the structure of the target program, such as instructions, source lines, functions, and load objects. In addition to a header, the data recorded for each event collected has two parts:

- Some event-specific data that is used to compute metrics
- A call stack of the application that is used to associate those metrics with the program structure

The process of associating the metrics with the program structure is not always straightforward, due to the insertions, transformations, and optimizations made by the compiler. This chapter describes the process and discusses the effect on what you see in the Performance Analyzer displays.

This chapter covers the following topics:

- "How Data Collection Works" on page 137
- "Interpreting Performance Metrics" on page 141
- "Call Stacks and Program Execution" on page 147
- "Mapping Addresses to Program Structure" on page 164
- "Mapping Performance Data to Index Objects" on page 172
- "Mapping Data Addresses to Program Data Objects" on page 173

How Data Collection Works

The output from a data collection run is an experiment, which is stored as a directory with various internal files and subdirectories in the file system.

Experiment Format

All experiments must have three files:

- A log file (log.xml), an XML file that contains information about what data was collected, the versions of various components, a record of various events during the life of the target, and the word size of the target.
- A map file (map.xml), an XML file that records the time-dependent information about what load objects are loaded into the address space of the target, and the times at which they are loaded or unloaded.
- An overview file; a binary file containing usage information recorded at every sample point in the experiment.

In addition, experiments have binary data files representing the profile events in the life of the process. Each data file has a series of events, as described below under "Interpreting Performance Metrics" on page 141. Separate files are used for each type of data, but each file is shared by all LWPs in the target. The data files are named as follows:

TABLE 7-1	Data Types and	Corresponding File Names	,
-----------	----------------	--------------------------	---

Data Type	File Name
Clock-based profiling	profile
Hardware counter overflow profiling	hwcounters
Synchronization tracing	synctrace
Heap tracing	heaptrace
MPI tracing	mpitrace
Open MP tracing	omptrace

For clock-based profiling, or hardware counter overflow profiling, the data is written in a signal handler invoked by the clock tick or counter overflow. For synchronization tracing, heap tracing, MPI tracing, or Open MP tracing, data is written from libcollector. so routines that are interposed by the LD_PRELOAD environment variable on the normal user-invoked routines. Each such interposition routine partially fills in a data record, then invokes the normal user-invoked routine, and fills in the rest of the data record when that routine returns, and writes the record to the data file.

All data files are memory-mapped and written in blocks. The records are filled in such a way as to always have a valid record structure, so that experiments can be read as they are being written. The buffer management strategy is designed to minimize contention and serialization between LWPs.

An experiment can optionally contain an ASCII file with the filename of notes. This file is automatically created when using the -C comment argument to the collect command. You can create or edit the file manually after the experiment has been created. The contents of the file are prepended to the experiment header.

The archives Directory

Each experiment has an archives directory that contains binary files describing each load object referenced in the map.xml file. These files are produced by the er_archive utility, which runs at the end of data collection. If the process terminates abnormally, the er_archive utility may not be invoked, in which case, the archive files are written by the er_print utility or the Analyzer when first invoked on the experiment.

Descendant Processes

Descendant processes write their experiments into subdirectories within the founder-process' experiment directory.

These new experiments are named to indicate their lineage as follows:

- An underscore is appended to the creator's experiment name
- One of the following code letters is added: f for fork, x for exec, and c for other descendants.
- A number to indicate the index of the fork or exec is added after the code letter. This
 number is applied whether the process was started successfully or not.
- The experiment suffix, .er is appended to complete the experiment name.

For example, if the experiment name for the founder process is test.1.er, the experiment for the child process created by its third fork is test.1.er/_f3.er. If that child process executes a new image, the corresponding experiment name is test.1.er/_f3_x1.er. Descendant experiments consist of the same files as the parent experiment, but they do not have descendant experiments (all descendants are represented by subdirectories in the founder experiment), and they do not have archive subdirectories (all archiving is done into the founder experiment).

Dynamic Functions

An experiment where the target creates dynamic functions has additional records in the map.xml file describing those functions, and an additional file, dyntext, containing a copy of the actual instructions of the dynamic functions. The copy is needed to produce annotated disassembly of dynamic functions.

Java Experiments

A Java experiment has additional records in the map.xml file, both for dynamic functions created by the JVM software for its internal purposes, and for dynamically-compiled (HotSpot) versions of the target Java methods.

In addition, a Java experiment has a JAVA_CLASSES file, containing information about all of the user's Java classes invoked.

Java tracing data is recorded using a JVMTI agent, which is part of libcollector.so. The agent receives events that are mapped into the recorded trace events. The agent also receives events for class loading and HotSpot compilation, that are used to write the JAVA_CLASSES file, and the Java-compiled method records in the map.xml file.

Recording Experiments

You can record an experiment in three different ways:

- With the collect command
- With dbx creating a process
- With dbx creating an experiment from a running process

The Performance Tools Collect window in the Analyzer GUI runs a collect experiment; the Collector dialog in the IDE runs a dbx experiment.

collect Experiments

When you use the collect command to record an experiment, the collect utility creates the experiment directory and sets the LD_PRELOAD environment variable to ensure that libcollector.so is preloaded into the target's address space. It then sets environment variables to inform libcollector.so about the experiment name, and data collection options, and executes the target on top of itself.

libcollector.so is responsible for writing all experiment files.

dbx Experiments That Create a Process

When dbx is used to launch a process with data collection enabled, dbx also creates the experiment directory and ensures preloading of libcollector.so. Then dbx stops the process at a breakpoint before its first instruction, and calls an initialization routine in libcollector.so to start the data collection.

Java experiments can not be collected by dbx, since dbx uses a Java Virtual Machine Debug Interface (JVMDI) agent for debugging, and that agent can not coexist with the Java Virtual Machine Tools Interface (JVMTI) agent needed for data collection.

dbx Experiments, on a Running Process

When dbx is used to start an experiment on a running process, it creates the experiment directory, but cannot use the LD_PRELOAD environment variable. dbx makes an interactive function call into the target to open libcollector.so, and then calls the libcollector.so initialization routine, just as it does when creating the process. Data is written by libcollector.so just as in a collect experiment.

Since libcollector. so was not in the target address space when the process started, any data collection that depends on interposition on user-callable functions (synchronization tracing, heap tracing, MPI tracing) might not work. In general, the symbols have already been resolved to the underlying functions, so the interposition can not happen. Furthermore, the following of descendant processes also depends on interposition, and does not work properly for experiments created by dbx on a running process.

If you have explicitly preloaded libcollector. so before starting the process with dbx, or before using dbx to attach to the running process, you can collect tracing data.

Interpreting Performance Metrics

The data for each event contains a high-resolution timestamp, a thread ID, an LWP ID, and a processor ID. The first three of these can be used to filter the metrics in the Performance Analyzer by time, thread or LWP. See the getcpuid(2) man page for information on processor IDs. On systems where getcpuid is not available, the processor ID is -1, which maps to Unknown.

In addition to the common data, each event generates specific raw data, which is described in the following sections. Each section also contains a discussion of the accuracy of the metrics derived from the raw data and the effect of data collection on the metrics.

Clock-Based Profiling

The event-specific data for clock-based profiling consists of an array of profiling interval counts. On the Solaris OS, an interval counter is provided. At the end of the profiling interval, the appropriate interval counter is incremented by 1, and another profiling signal is scheduled. The array is recorded and reset only when the Solaris LWP thread enters CPU user mode. Resetting the array consists of setting the array element for the User-CPU state to 1, and the array elements for all the other states to 0. The array data is recorded on entry to user mode before the array is reset. Thus, the array contains an accumulation of counts for each microstate that was entered since the previous entry into user mode, for each of the ten microstates maintained by the kernel for each Solaris LWP. On the Linux OS, microstates do not exist; the only interval counter is User CPU Time.

The call stack is recorded at the same time as the data. If the Solaris LWP is not in user mode at the end of the profiling interval, the call stack cannot change until the LWP or thread enters user mode again. Thus the call stack always accurately records the position of the program counter at the end of each profiling interval.

The metrics to which each of the microstates contributes on the Solaris OS are shown in Table 7-2.

Kernel Microstate	Description
LMS USER	Running in user mode

TABLE 7-2 How Kernel Microstates Contribute to Metrics

Kernel Microstate	Description	Metric Name
LMS_USER	Running in user mode	User CPU Time
LMS_SYSTEM	Running in system call or page fault	System CPU Time
LMS_TRAP	Running in any other trap	System CPU Time
LMS_TFAULT	Asleep in user text page fault	Text Page Fault Time
LMS_DFAULT	Asleep in user data page fault	Data Page Fault Time
LMS_KFAULT	Asleep in kernel page fault	Other Wait Time
LMS_USER_LOCK	Asleep waiting for user-mode lock	User Lock Time
LMS_SLEEP	Asleep for any other reason	Other Wait Time
LMS_STOPPED	Stopped (/proc, job control, or lwp_stop)	Other Wait Time
LMS_WAIT_CPU	Waiting for CPU	Wait CPU Time

Accuracy of Timing Metrics

Timing data is collected on a statistical basis, and is therefore subject to all the errors of any statistical sampling method. For very short runs, in which only a small number of profile packets is recorded, the call stacks might not represent the parts of the program which consume the most resources. Run your program for long enough or enough times to accumulate hundreds of profile packets for any function or source line you are interested in.

In addition to statistical sampling errors, specific errors arise from the way the data is collected and attributed and the way the program progresses through the system. The following are some of the circumstances in which inaccuracies or distortions can appear in the timing metrics:

- When a Solaris LWP or Linux thread is created, the time spent before the first profile packet is recorded is less than the profiling interval, but the entire profiling interval is ascribed to the microstate recorded in the first profile packet. If many LWP or threads are created, the error can be many times the profiling interval.
- When a Solaris LWP or Linux thread is destroyed, some time is spent after the last profile packet is recorded. If many LWPs or threads are destroyed, the error can be many times the profiling interval.
- Rescheduling of LWPs or threads can occur during a profiling interval. As a consequence, the recorded state of the LWP might not represent the microstate in which it spent most of the profiling interval. The errors are likely to be larger when there are more Solaris LWPs or Linux threads to run than there are processors to run them.
- A program can behave in a way that is correlated with the system clock. In this case, the profiling interval always expires when the Solaris LWP or Linux thread is in a state that might represent a small fraction of the time spent, and the call stacks recorded for a

particular part of the program are overrepresented. On a multiprocessor system, the profiling signal can induce a correlation: processors that are interrupted by the profiling signal while they are running LWPs for the program are likely to be in the Trap-CPU microstate when the microstate is recorded.

- The kernel records the microstate value when the profiling interval expires. When the system is under heavy load, that value might not represent the true state of the process. On the Solaris OS, this situation is likely to result in overaccounting of the Trap-CPU or Wait-CPU microstate.
- When the system clock is being synchronized with an external source, the time stamps recorded in profile packets do not reflect the profiling interval but include any adjustment that was made to the clock. The clock adjustment can make it appear that profile packets are lost. The time period involved is usually several seconds, and the adjustments are made in increments.

In addition to the inaccuracies just described, timing metrics are distorted by the process of collecting data. The time spent recording profile packets never appears in the metrics for the program, because the recording is initiated by the profiling signal. (This is another instance of correlation.) The user CPU time spent in the recording process is distributed over whatever microstates are recorded. The result is an underaccounting of the User CPU Time metric and an overaccounting of other metrics. The amount of time spent recording data is typically less than a few percent of the CPU time for the default profiling interval.

Comparisons of Timing Metrics

If you compare timing metrics obtained from the profiling done in a clock-based experiment with times obtained by other means, you should be aware of the following issues.

For a single-threaded application, the total Solaris LWP or Linux thread time recorded for a process is usually accurate to a few tenths of a percent, compared with the values returned by gethrtime(3C) for the same process. The CPU time can vary by several percentage points from the values returned by gethrvtime(3C) for the same process. Under heavy load, the variation might be even more pronounced. However, the CPU time differences do not represent a systematic distortion, and the relative times reported for different functions, source-lines, and such are not substantially distorted.

For multithreaded applications using unbound threads on the Solaris OS, differences in values returned by gethrvtime() could be meaningless because gethrvtime() returns values for an LWP, and a thread can change from one LWP to another.

The LWP times that are reported in the Performance Analyzer can differ substantially from the times that are reported by vmstat, because vmstat reports times that are summed over CPUs. If the target process has more LWPs than the system on which it is running has CPUs, the Performance Analyzer shows more wait time than vmstat reports.

The microstate timings that appear in the Statistics tab of the Performance Analyzer and the er_print statistics display are based on process file system /proc usage reports, for which the times spent in the microstates are recorded to high accuracy. See the proc (4) man page for more information. You can compare these timings with the metrics for the <Total> function, which represents the program as a whole, to gain an indication of the accuracy of the aggregated timing metrics. However, the values displayed in the Statistics tab can include other contributions that are not included in the timing metric values for <Total>. These contributions come from the periods of time in which data collection is paused.

User CPU time and hardware counter cycle time differ because the hardware counters are turned off when the CPU mode has been switched to system mode. For more information, see "Traps" on page 149.

Synchronization Wait Tracing

Synchronization wait tracing is available only on Solaris platforms. The Collector collects synchronization delay events by tracing calls to the functions in the threads library, libthread.so, or to the real time extensions library, librt.so. The event-specific data consists of high-resolution timestamps for the request and the grant (beginning and end of the call that is traced), and the address of the synchronization object (the mutex lock being requested, for example). The thread and LWP IDs are the IDs at the time the data is recorded. The wait time is the difference between the request time and the grant time. Only events for which the wait time exceeds the specified threshold are recorded. The synchronization wait tracing data is recorded in the experiment at the time of the grant.

The LWP on which the waiting thread is scheduled cannot perform any other work until the event that caused the delay is completed. The time spent waiting appears both as Synchronization Wait Time and as User Lock Time. User Lock Time can be larger than Synchronization Wait Time because the synchronization delay threshold screens out delays of short duration.

The wait time is distorted by the overhead for data collection. The overhead is proportional to the number of events collected. You can minimize the fraction of the wait time spent in overhead by increasing the threshold for recording events.

Hardware Counter Overflow Profiling

Hardware counter overflow profiling data includes a counter ID and the overflow value. The value can be larger than the value at which the counter is set to overflow, because the processor executes some instructions between the overflow and the recording of the event. The value is especially likely to be larger for cycle and instruction counters, which are incremented much more frequently than counters such as floating-point operations or cache misses. The delay in recording the event also means that the program counter address recorded with call stack does

not correspond exactly to the overflow event. See "Attribution of Hardware Counter Overflows" on page 188 for more information. See also the discussion of "Traps" on page 149. Traps and trap handlers can cause significant differences between reported User CPU time and time reported by the cycle counter.

The amount of data collected depends on the overflow value. Choosing a value that is too small can have the following consequences.

- The amount of time spent collecting data can be a substantial fraction of the execution time of the program. The collection run might spend most of its time handling overflows and writing data instead of running the program.
- A substantial fraction of the counts can come from the collection process. These counts are attributed to the collector function collector_record_counters. If you see high counts for this function, the overflow value is too small.
- The collection of data can alter the behavior of the program. For example, if you are collecting data on cache misses, the majority of the misses could come from flushing the collector instructions and profiling data from the cache and replacing it with the program instructions and data. The program would appear to have a lot of cache misses, but without data collection there might in fact be very few cache misses.

Choosing a value that is too large can result in too few overflows for good statistics. The counts that are accrued after the last overflow are attributed to the collector function collector_final_counters. If you see a substantial fraction of the counts in this function, the overflow value is too large.

Heap Tracing

The Collector records tracing data for calls to the memory allocation and deallocation functions malloc, realloc, memalign, and free by interposing on these functions. If your program bypasses these functions to allocate memory, tracing data is not recorded. Tracing data is not recorded for Java memory management, which uses a different mechanism.

The functions that are traced could be loaded from any of a number of libraries. The data that you see in the Performance Analyzer might depend on the library from which a given function is loaded.

If a program makes a large number of calls to the traced functions in a short space of time, the time taken to execute the program can be significantly lengthened. The extra time is used in recording the tracing data.

Dataspace Profiling

A dataspace profile is a data collection in which memory- related events, such as cache misses, are reported against the data-object references that cause the events rather than just the instructions where the memory-related events occur. Dataspace profiling is not available on Linux systems.

To allow dataspace profiling, the target must be a C program, compiled for the SPARC architecture, with the -xhwcprof flag and -xdebugformat=dwarf -g flag. Furthermore, the data collected must be hardware counter profiles for memory-related counters and the optional + sign must be prepended to the counter name. The Performance Analyzer includes two tabs related to dataspace profiling, the DataObject tab and the DataLayout tab, and various tabs for memory objects.

Dataspace profiling can also be done with clock-profiling, by prepending a plus sign (+) to the profiling interval.

MPI Tracing

MPI tracing is available only on Solaris platforms. MPI tracing records information about calls to MPI library functions. The event-specific data consists of high-resolution timestamps for the request and the grant (beginning and end of the call that is traced), the number of send and receive operations and the number of bytes sent or received. Tracing is done by interposing on the calls to the MPI library. The interposing functions do not have detailed information about the optimization of data transmission, nor about transmission errors, so the information that is presented represents a simple model of the data transmission, which is explained in the following paragraphs.

The number of bytes received is the length of the buffer as defined in the call to the MPI function. The actual number of bytes received is not available to the interposing function.

Some of the Global Communication functions have a single origin or a single receiving process known as the root. The accounting for such functions is done as follows:

- Root sends data to all processes, itself included.
- Root receives data from all processes. itself included.
- Each process communicates with each process, itself included

The following examples illustrate the accounting procedure. In these examples, G is the size of the group.

For a call to MPI Bcast(),

- Root sends G packets of N bytes, one packet to each process, including itself
- All G processes in the group (including root) receive N bytes

For a call to MPI_Allreduce(),

- Each process sends G packets of N bytes
- Each process receives G packets of N bytes

For a call to MPI_Reduce_scatter(),

- Each process sends G packets of N/G bytes
- Each process receives G packets of N/G bytes

Call Stacks and Program Execution

A *call stack* is a series of program counter addresses (PCs) representing instructions from within the program. The first PC, called the *leaf PC*, is at the bottom of the stack, and is the address of the next instruction to be executed. The next PC is the address of the call to the function containing the leaf PC; the next PC is the address of the call to that function, and so forth, until the top of the stack is reached. Each such address is known as a return address. The process of recording a call stack involves obtaining the return addresses from the program stack and is referred to as *unwinding the stack*. For information on unwind failures, see "Incomplete Stack Unwinds" on page 163.

The leaf PC in a call stack is used to assign exclusive metrics from the performance data to the function in which that PC is located. Each PC on the stack, including the leaf PC, is used to assign inclusive metrics to the function in which it is located.

Most of the time, the PCs in the recorded call stack correspond in a natural way to functions as they appear in the source code of the program, and the Performance Analyzer's reported metrics correspond directly to those functions. Sometimes, however, the actual execution of the program does not correspond to a simple intuitive model of how the program would execute, and the Performance Analyzer's reported metrics might be confusing. See "Mapping Addresses to Program Structure" on page 164 for more information about such cases.

Single-Threaded Execution and Function Calls

The simplest case of program execution is that of a single-threaded program calling functions within its own load object.

When a program is loaded into memory to begin execution, a context is established for it that includes the initial address to be executed, an initial register set, and a stack (a region of memory used for scratch data and for keeping track of how functions call each other). The initial address is always at the beginning of the function <code>start()</code>, which is built into every executable.

When the program runs, instructions are executed in sequence until a branch instruction is encountered, which among other things could represent a function call or a conditional statement. At the branch point, control is transferred to the address given by the target of the branch, and execution proceeds from there. (Usually the next instruction after the branch is

already committed for execution: this instruction is called the branch delay slot instruction. However, some branch instructions annul the execution of the branch delay slot instruction).

When the instruction sequence that represents a call is executed, the return address is put into a register, and execution proceeds at the first instruction of the function being called.

In most cases, somewhere in the first few instructions of the called function, a new frame (a region of memory used to store information about the function) is pushed onto the stack, and the return address is put into that frame. The register used for the return address can then be used when the called function itself calls another function. When the function is about to return, it pops its frame from the stack, and control returns to the address from which the function was called.

Function Calls Between Shared Objects

When a function in one shared object calls a function in another shared object, the execution is more complicated than in a simple call to a function within the program. Each shared object contains a Program Linkage Table, or PLT, which contains entries for every function external to that shared object that is referenced from it. Initially the address for each external function in the PLT is actually an address within ld. so, the dynamic linker. The first time such a function is called, control is transferred to the dynamic linker, which resolves the call to the real external function and patches the PLT address for subsequent calls.

If a profiling event occurs during the execution of one of the three PLT instructions, the PLT PCs are deleted, and exclusive time is attributed to the call instruction. If a profiling event occurs during the first call through a PLT entry, but the leaf PC is not one of the PLT instructions, any PCs that arise from the PLT and code in ld.so are replaced by a call to an artificial function, @plt, which accumulates inclusive time. There is one such artificial function for each shared object. If the program uses the LD_AUDIT interface, the PLT entries might never be patched, and non-leaf PCs from @plt can occur more frequently.

Signals

When a signal is sent to a process, various register and stack operations occur that make it look as though the leaf PC at the time of the signal is the return address for a call to a system function, sigacthandler(). sigacthandler() calls the user-specified signal handler just as any function would call another.

The Performance Analyzer treats the frames resulting from signal delivery as ordinary frames. The user code at the point at which the signal was delivered is shown as calling the system function sigacthandler(), and sigacthandler() in turn is shown as calling the user's signal handler. Inclusive metrics from both sigacthandler() and any user signal handler, and any other functions they call, appear as inclusive metrics for the interrupted function.

The Collector interposes on sigaction() to ensure that its handlers are the primary handlers for the SIGPROF signal when clock data is collected and SIGEMT signal when hardware counter overflow data is collected.

Traps

Traps can be issued by an instruction or by the hardware, and are caught by a trap handler. System traps are traps that are initiated from an instruction and trap into the kernel. All system calls are implemented using trap instructions. Some examples of hardware traps are those issued from the floating point unit when it is unable to complete an instruction (such as the fitos instruction for some register-content values on the UltraSPARC* III platform), or when the instruction is not implemented in the hardware.

When a trap is issued, the Solaris LWP or Linux kernel enters system mode. On the Solaris OS, the microstate is usually switched from User CPU state to Trap state then to System state. The time spent handling the trap can show as a combination of System CPU time and User CPU time, depending on the point at which the microstate is switched. The time is attributed to the instruction in the user's code from which the trap was initiated (or to the system call).

For some system calls, it is considered critical to provide as efficient handling of the call as possible. The traps generated by these calls are known as *fast traps*. Among the system functions that generate fast traps are gethrtime and gethrvtime. In these functions, the microstate is not switched because of the overhead involved.

In other circumstances it is also considered critical to provide as efficient handling of the trap as possible. Some examples of these are TLB (translation lookaside buffer) misses and register window spills and fills, for which the microstate is not switched.

In both cases, the time spent is recorded as User CPU time. However, the hardware counters are turned off because the CPU mode has been switched to system mode. The time spent handling these traps can therefore be estimated by taking the difference between User CPU time and Cycles time, preferably recorded in the same experiment.

In one case the trap handler switches back to user mode, and that is the misaligned memory reference trap for an 8-byte integer which is aligned on a 4-byte boundary in Fortran. A frame for the trap handler appears on the stack, and a call to the handler can appear in the Performance Analyzer, attributed to the integer load or store instruction.

When an instruction traps into the kernel, the instruction following the trapping instruction appears to take a long time, because it cannot start until the kernel has finished executing the trapping instruction.

Tail-Call Optimization

The compiler can do one particular optimization whenever the last thing a particular function does is to call another function. Rather than generating a new frame, the callee reuses the frame from the caller, and the return address for the callee is copied from the caller. The motivation for this optimization is to reduce the size of the stack, and, on SPARC platforms, to reduce the use of register windows.

Suppose that the call sequence in your program source looks like this:

```
A -> B -> C -> D
```

When B and C are tail-call optimized, the call stack looks as if function A calls functions B, C, and D directly.

A -> B

A -> C

A -> D

That is, the call tree is flattened. When code is compiled with the -g option, tail-call optimization takes place only at a compiler optimization level of 4 or higher. When code is compiled without the -g option, tail-call optimization takes place at a compiler optimization level of 2 or higher.

Explicit Multithreading

A simple program executes in a single thread, on a single LWP (lightweight process) in the Solaris OS. Multithreaded executables make calls to a thread creation function, to which the target function for execution is passed. When the target exits, the thread is destroyed.

The Solaris OS supports two thread implementations: Solaris threads and POSIX threads (Pthreads). Beginning with the Solaris 10 OS, both thread implementations are included in libc.so. In the Solaris 9 OS, the thread implementations are contained in separate libraries, libthread.so and libpthread.so.

With Solaris threads, newly-created threads begin execution at a function called _thread_start(), which calls the function passed in the thread creation call. For any call stack involving the target as executed by this thread, the top of the stack is _thread_start(), and there is no connection to the caller of the thread creation function. Inclusive metrics associated with the created thread therefore only propagate up as far as _thread_start() and the <Total> function. In addition to creating the threads, the Solaris threads implementation also creates LWPs on Solaris to execute the threads. Each thread is bound to a specific LWP.

Pthreads is available in the Solaris 10 OS as well as in the Linux OS for explicit multithreading.

In both environments, to create a new thread, the application calls the Pthread API function pthread_create(), passing a pointer to an application-defined start routine as one of the function arguments.

On the Solaris OS, when a new pthread starts execution, it calls the <code>_lwp_start()</code> function. On the Solaris 10 OS, <code>_lwp_start()</code> calls an intermediate function <code>_thr_setup()</code>, which then calls the application-defined start routine that was specified in <code>pthread_create()</code>. On the Solaris 9 OS, the <code>lwp_start()</code> directly calls the application's start routine.

On the Linux OS, when the new pthread starts execution, it runs a Linux-specific system function, clone(), which calls another internal initialization function, pthread_start_thread(), which in turn calls the application-defined start routine that was

specified in pthread_create(). The Linux metrics-gathering functions available to the Collector are thread-specific. Therefore, when the collect utility runs, it interposes a metrics-gathering function, named collector_root(), between pthread_start_thread() and the application-defined thread start routine.

Overview of Java Technology-Based Software Execution

To the typical developer, a Java technology-based application runs just like any other program. The application begins at a main entry point, typically named class.main, which may call other methods, just as a C or C++ application does.

To the operating system, an application written in the Java programming language, (pure or mixed with C/C++), runs as a process instantiating the JVM software. The JVM software is compiled from C++ sources and starts execution at $_$ start, which calls main, and so forth. It reads bytecode from .class and/or .jar files, and performs the operations specified in that program. Among the operations that can be specified is the dynamic loading of a native shared object, and calls into various functions or methods contained within that object.

The JVM software does a number of things that are typically not done by applications written in traditional languages. At startup, it creates a number of regions of dynamically-generated code in its data space. One of these regions is the actual interpreter code used to process the application's bytecode methods.

During execution of a Java technology-based application, most methods are interpreted by the JVM software; these methods are referred to as interpreted methods. The Java HotSpot virtual machine monitors performance as it interprets the bytecode to detect methods that are frequently executed. Methods that are repeatedly executed might then be compiled by the Java HotSpot virtual machine to generate machine code for those methods. The resulting methods are referred to as compiled methods. The virtual machine executes the more efficient compiled methods thereafter, rather than interpret the original bytecode for the methods. Compiled methods are loaded into the data space of the application, and may be unloaded at some later point in time. In addition, other code is generated in the data space to execute the transitions between interpreted and compiled code.

Code written in the Java programming language might also call directly into native-compiled code, either C, C++, or Fortran; the targets of such calls are referred to as native methods.

Applications written in the Java programming language are inherently multithreaded, and have one JVM software thread for each thread in the user's program. Java applications also have several housekeeping threads used for signal handling, memory management, and Java HotSpot virtual machine compilation.

Data collection is implemented with various methods in the JVMTI in J2SE 5.0.

Java Call Stacks and Machine Call Stacks

The performance tools collect their data by recording events in the life of each Solaris LWP or Linux thread, along with the call stack at the time of the event. At any point in the execution of any application, the call stack represents where the program is in its execution, and how it got there. One important way that mixed-model Java applications differ from traditional C, C++, and Fortran applications is that at any instant during the run of the target there are two call stacks that are meaningful: a Java call stack, and a machine call stack. Both call stacks are recorded during profiling, and are reconciled during analysis.

Clock-based Profiling and Hardware Counter Overflow Profiling

Clock-based profiling and hardware counter overflow profiling for Java programs work just as for C, C++, and Fortran programs, except that both Java call stacks and machine call stacks are collected.

Synchronization Tracing

Synchronization tracing for Java programs is based on events generated when a thread attempts to acquire a Java Monitor. Both machine call stacks and Java call stacks are collected for these events, but no synchronization tracing data is collected for internal locks used within the JVM software.

Heap Tracing

Heap tracing data records object-allocation events, generated by the user code, and object-deallocation events, generated by the garbage collector. In addition, any use of C/C++ memory-management functions, such as malloc and free, also generates events that are recorded.

Java Processing Representations

There are three representations for displaying performance data for applications written in the Java programming language: the Java representation, the Expert-Java representation, and the Machine representation. The Java representation is shown by default where the data supports it. The following section summarizes the main differences between these three representations.

The User Representation

The User representation shows compiled and interpreted Java methods by name, and shows native methods in their natural form. During execution, there might be many instances of a particular Java method executed: the interpreted version, and, perhaps, one or more compiled versions. In the Java representation all methods are shown aggregated as a single method. This representation is selected in the Analyzer by default.

A PC for a Java method in the Java representation corresponds to the method-id and a bytecode index into that method; a PC for a native function correspond to a machine PC. The call stack for a Java thread may have a mixture of Java PCs and machine PCs. It does not have any frames corresponding to Java housekeeping code, which does not have a Java representation. Under some circumstances, the JVM software cannot unwind the Java stack, and a single frame with the special function, <no Java callstack recorded>, is returned. Typically, it amounts to no more than 5-10% of the total time.

The function list in the Java representation shows metrics against the Java methods and any native methods called. The caller-callee panel shows the calling relationships in the Java representation.

Source for a Java method corresponds to the source code in the . java file from which it was compiled, with metrics on each source line. The disassembly of any Java method shows the bytecode generated for it, with metrics against each bytecode, and interleaved Java source, where available.

The Timeline in the Java representation shows only Java threads. The call stack for each thread is shown with its Java methods.

All Java programs may have explicit synchronization, usually performed by calling the monitor-enter routine.

Synchronization-delay tracing in the Java representation is based on the JVMTI synchronization events. Data from the normal synchronization tracing is not shown in the Java representation.

Data space profiling in the Java representation is not currently supported.

The Expert-User Representation

The Expert-Java representation is similar to the Java Representation, except that some details of the JVM internals that are suppressed in the Java Representation are exposed in the Expert-Java Representation. With the Expert-Java representation, the Timeline shows all threads; the call stack for housekeeping threads is a native call stack.

The Machine Representation

The Machine representation shows functions from the JVM software itself, rather than from the application being interpreted by the JVM software. It also shows all compiled and native methods. The machine representation looks the same as that of applications written in traditional languages. The call stack shows JVM frames, native frames, and compiled-method frames. Some of the JVM frames represent transition code between interpreted Java, compiled Java, and native code.

Source from compiled methods are shown against the Java source; the data represents the specific instance of the compiled-method selected. Disassembly for compiled methods show the

generated machine assembler code, not the Java bytecode. Caller-callee relationships show all overhead frames, and all frames representing the transitions between interpreted, compiled, and native methods.

The Timeline in the machine representation shows bars for all threads, LWPs, or CPUs, and the call stack in each is the machine-representation call stack.

In the machine representation, thread synchronization devolves into calls to _lwp_mutex_lock. No synchronization data is shown, since these calls are not traced.

Overview of OpenMP Software Execution

The actual execution model of OpenMP Applications is described in the OpenMP specifications (See, for example, OpenMP Application Program Interface, Version 2.5, section 1.3.) The specification, however, does not describe some implementation details that may be important to users, and the actual implementation at Sun Microsystems is such that directly recorded profiling information does not easily allow the user to understand how the threads interact.

As any single-threaded program runs, its call stack shows its current location, and a trace of how it got there, starting from the beginning instructions in a routine called _start, which calls main, which then proceeds and calls various subroutines within the program. When a subroutine contains a loop, the program executes the code inside the loop repeatedly until the loop exit criterion is reached. The execution then proceeds to the next sequence of code, and so forth.

When the program is parallelized with OpenMP (or by autoparallelization), the behavior is different. An intuitive model of that behavior has the main, or master, thread executing just as a single-threaded program. When it reaches a parallel loop or parallel region, additional slave threads appear, each a clone of the master thread, with all of them executing the contents of the loop or parallel region, in parallel, each for different chunks of work. When all chunks of work are completed, all the threads are synchronized, the slave threads disappear, and the master thread proceeds.

When the compiler generates code for a parallel region or loop (or any other OpenMP construct), the code inside it is extracted and made into an independent function, called an mfunction. (It may also be referred to as an outlined function, or a loop-body-function.) The name of the function encodes the OpenMP construct type, the name of the function from which it was extracted, and the line number of the source line at which the construct appears. The names of these functions are shown in the Analyzer in the following form, where the name in brackets is the actual symbol-table name of the function:

```
bardo_ -- OMP parallel region from line 9 [_$p1C9.bardo_]
atomsum_ -- MP doall from line 7 [_$d1A7.atomsum_]
```

There are other forms of such functions, derived from other source constructs, for which the OMP parallel region in the name is replaced by MP construct, MP doall, or OMP sections. In the following discussion, all of these are referred to generically as "parallel regions".

Each thread executing the code within the parallel loop can invoke its mfunction multiple times, with each invocation doing a chunk of the work within the loop. When all the chunks of work are complete, each thread calls synchronization or reduction routines in the library; the master thread then continues, while the slave threads become idle, waiting for the master thread to enter the next parallel region. All of the scheduling and synchronization are handled by calls to the OpenMP runtime.

During its execution, the code within the parallel region might be doing a chunk of the work, or it might be synchronizing with other threads or picking up additional chunks of work to do. It might also call other functions, which may in turn call still others. A slave thread (or the master thread) executing within a parallel region, might itself, or from a function it calls, act as a master thread, and enter its own parallel region, giving rise to nested parallelism.

The Analyzer collects data based on statistical sampling of call stacks, and aggregates its data across all threads and shows metrics of performance based on the type of data collected, against functions, callers and callees, source lines, and instructions. It presents information on the performance of OpenMP programs in either of two modes, User mode and Machine mode. (A third mode, Expert mode, is supported, but is identical to User mode.)

For more detailed information, see the white paper An OpenMP Runtime API for Profiling at the OpenMP user community web site.

User Mode Display of OpenMP Profile Data

The User mode presentation of the profile data attempts to present the information as if the program really executed according to the model described in "Overview of OpenMP Software Execution" on page 154. The actual data captures the implementation details of the runtime library, libmtsk.so, which does not correspond to the model. In User mode, the presentation of profile data is altered to match the model better, and differs from the recorded data and Machine mode presentation in three ways:

- Artificial functions are constructed representing the state of each thread from the point of view of the OpenMP runtime library.
- Call stacks are manipulated to report data corresponding to the model of how the code runs, as described above.
- Two additional metrics of performance are constructed for clock-based profiling experiments, corresponding to time spent doing useful work and time spent waiting in the OpenMP runtime.

Artificial Functions

Artificial functions are constructed and put onto the User mode call stacks reflecting events in which a thread was in some state within the OpenMP runtime library.

The following artificial functions are defined; each is followed by a description of its function:

- <0MP-overhead>— executing in the OpenMP library
- <OMP-idle>— slave thread, waiting for work
- <OMP-reduction>— thread performing a reduction operation
- <OMP-implicit_barrier>— thread waiting at an implicit barrier
- <OMP-explicit barrier>— thread waiting at an explicit barrier
- <OMP-lock wait>— thread waiting for a lock
- <OMP-critical_section_wait>— thread waiting to enter a critical section
- <0MP-ordered section wait>— thread waiting for its turn to enter an ordered section

When a thread is in an OpenMP runtime state corresponding to one of those functions, the corresponding function is added as the leaf function on the stack. When a thread's leaf function is anywhere in the OpenMP runtime, it is replaced by <OMP-overhead> as the leaf function. Otherwise, all PCs from the OpenMP runtime are omitted from the user-mode stack.

User Mode Call Stacks

The easiest way to understand this model is to look at the call stacks of an OpenMP program at various points in its execution. This section considers a simple program that has a main program that calls one subroutine, foo. That subroutine has a single parallel loop, in which the threads do work, contend for, acquire, and release a lock, and enter and leave a critical section. An additional set of call stacks is shown, reflecting the state when one slave thread has called another function, bar, which enters a nested parallel region.

In this presentation, all the inclusive time spent in a parallel region is included in the inclusive time in the function from which it was extracted, including time spent in the OpenMP runtime, and that inclusive time is propagated all the way up to main and start

The call stacks that represent the behavior in this model appear as shown in the subsections that follow. The actual names of the parallel region functions are of the following form, as described above:

```
foo -- OMP parallel region from line 9[ [_$p1C9.foo] bar -- OMP parallel region from line 5[ [_$p1C5.bar]
```

For clarity, the following shortened forms are used in the descriptions:

```
foo -- OMP...
bar -- OMP...
```

In the descriptions, call stacks from all threads are shown at an instant during execution of the program. The call stack for each thread is shown as a stack of frames, matching the data from selecting an individual profile event in the Analyzer Timeline tab for a single thread, with the leaf PC at the top. In the Timeline tab, each frame is shown with a PC offset, which is omitted below. The stacks from all the threads are shown in a horizontal array, while in the Analyzer Timeline tab, the stacks for other threads would appear in profile bars stacked vertically. Furthermore, in the representation presented, the stacks for all the threads are shown as if they were captured at exactly the same instant, while in a real experiment, the stacks are captured independently in each thread, and may be skewed relative to each other.

The call stacks shown represent the data as it is presented with a view mode of User in the Analyzer or in the er_print utility.

1. Before the first parallel region

Before the first parallel region is entered, there is only the one thread, the master thread.

Master	
foo	
main	
_start	

2. Upon entering the first parallel region

At this point, the library has created the slave threads, and all of the threads, master and slaves, are about to start processing their chunks of work. All threads are shown as having called into the code for the parallel region, foo-OMP..., from foo at the line on which the OpenMP directive for the construct appears, or from the line containing the loop statement that was autoparallelized. The code for the parallel region in each thread is calling into the OpenMP support library, shown as the <OMP-overhead> function, from the first instruction in the parallel region.

Master	Slave 1	Slave 2	Slave 3
<omp-overhead></omp-overhead>	<omp-overhead></omp-overhead>	<omp-overhead></omp-overhead>	<omp-overhead></omp-overhead>
foo-OMP	foo-OMP	foo-OMP	foo-OMP
foo	foo	foo	foo
main	main	main	main
_start	_start	_start	_start

The window in which <OMP-overhead> might appear is quite small, so that function might not appear in any particular experiment.

3. While executing within a parallel region

All four of the threads are doing useful work in the parallel region.

Master	Slave 1	Slave 2	Slave 3
foo-OMP	foo-OMP	foo-OMP	foo-OMP
foo	foo	foo	foo
main	main	main	main
_start	_start	_start	_start

4. While executing within a parallel region between chunks of work

All four of the threads are doing useful work, but one has finished one chunk of work, and is obtaining its next chunk.

Master	Slave 1	Slave 2	Slave 3		
	<omp-overhead></omp-overhead>	<omp-overhead></omp-overhead>			
foo-OMP	foo-OMP	foo-OMP	foo-OMP		
foo	foo	foo	foo		
main	main	main	main		
_start	_start	_start	_start		

5. While executing in a critical section within the parallel region

All four of the threads are executing, each within the parallel region. One of them is in the critical section, while one of the others is running before reaching the critical section (or after finishing it). The remaining two are waiting to enter the critical section themselves.

Master	Slave 1	Slave 2	Slave 3
<pre><omp-critical_section_wait></omp-critical_section_wait></pre>			<pre><omp-critical_section_wait></omp-critical_section_wait></pre>
foo-OMP	foo-OMP	foo-OMP	foo-OMP
foo	foo	foo	foo
main	main	main	main

Master	Slave 1	Slave 2	Slave 3
_start	_start	_start	_start

The data collected does not distinguish between the call stack of the thread that is executing in the critical section, and that of the thread that has not yet reached, or has already passed the critical section.

6. While executing around a lock within the parallel region

A section of code around a lock is completely analogous to a critical section. All four of the threads are executing within the parallel region. One thread is executing while holding the lock, one is executing before acquiring the lock (or after acquiring and releasing it), and the other two threads are waiting for the lock.

Master	Slave 1	Slave 2	Slave 3
<omp-lock_wait></omp-lock_wait>	<omp-lock_wait></omp-lock_wait>		
foo-OMP	foo-OMP	foo-OMP	foo-OMP
foo	foo	foo	foo
main	main	main	main
_start	_start	_start	_start

As in the critical section example, the data collected does not distinguish between the call stack of a thread holding the lock and executing, or executing before it acquires the lock or after it releases it.

7. Near the end of a parallel region

At this point, three of the threads have finished all their chunks of work, but one of them is still working. The OpenMP construct in this case implicitly specified a barrier; if the user code had explicitly specified the barrier, the <OMP-implicit_barrier> function would be replaced by <OMP-explicit_barrier>.

Master	Slave 1	Slave 2	Slave 3
<omp-implicit_barrier< td=""><td><omp-implicit_barrier></omp-implicit_barrier></td></omp-implicit_barrier<>	<omp-implicit_barrier></omp-implicit_barrier>		
foo-OMP	foo-OMP	foo-OMP	foo-OMP
foo	foo	foo	foo
main	main	main	main
_start	_start	_start	_start

8. Near the end of a parallel region, with one or more reduction variables

At this point, two of the threads have finished all their chunks of work, and are performing the reduction computations, but one of them is still working, and the fourth has finished its part of the reduction, and is waiting at the barrier.

Master	Slave 1	Slave 2	Slave 3	
<omp-reduction></omp-reduction>	<omp-implicit_barrier></omp-implicit_barrier>	<omp-implicit_barrier></omp-implicit_barrier>		
foo-OMP	foo-OMP	foo-OMP	foo-OMP	
foo	foo	foo	foo	
main	main	main	main	
_start	_start	_start	_start	

While one thread is shown in the <OMP-reduction> function, the actual time spent in doing the reduction is usually quite small, and is rarely captured in a call stack sample.

9. At the end of a parallel region

At this point, all threads have finished all chunks of work within the parallel region, and have reached the barrier.

Master	Slave 1	Slave 2	Slave 3	
<pre><omp-implicit_barrier×omp-implicit_barrier×omp-implicit_barrier></omp-implicit_barrier×omp-implicit_barrier×omp-implicit_barrier></pre>				
foo-OMP	foo-OMP	foo-OMP	foo-OMP	
foo	foo	foo	foo	
main	main	main	main	
_start	_start	_start	_start	

Since all the threads have reached the barrier, they may all proceed, and it is unlikely that an experiment would ever find all the threads in this state.

10. After leaving the parallel region

At this point, all the slave threads are waiting for entry into the next parallel region, either spinning or sleeping, depending on the various environment variables set by the user. The program is in serial execution.

Master	Slave 1	Slave 2	Slave 3	
foo				
main				
_start	<omp-idle></omp-idle>	<omp-idle></omp-idle>	<omp-idle></omp-idle>	

11. While executing in a nested parallel region

All four of the threads are working, each within the outer parallel region. One of the slave threads has called another function, bar, and it has created a nested parallel region, and an additional slave thread is created to work with it.

Master	Slave 1	Slave 2	Slave 3	Slave 4
	bar-OMP			bar-OMP
	bar			bar
foo-OMP	foo-OMP	foo-OMP	foo-OMP	foo-OMP
foo	foo	foo	foo	foo
main	main	main	main	main
_start	_start	_start	_start	_start

OpenMP Metrics

When processing a clock-profile event for an OpenMP program, two metrics corresponding to the time spent in each of two states in the OpenMP system are shown. They are "OMP work" and "OMP wait".

Time is accumulated in "OMP work" whenever a thread is executing from the user code, whether in serial or parallel. Time is accumulated in "OMP wait" whenever a thread is waiting for something before it can proceed, whether the wait is a busy-wait (spin-wait), or sleeping. The sum of these two metrics matches the "Total LWP Time" metric in the clock profiles.

Machine Presentation of OpenMP Profiling Data

The real call stacks of the program during various phases of execution are quite different from the ones portrayed above in the intuitive model. The Machine mode of presentation shows the call stacks as measured, with no transformations done, and no artificial functions constructed. The clock-profiling metrics are, however, still shown.

In each of the call stacks below, libmtsk represents one or more frames in the call stack within the OpenMP runtime library. The details of which functions appear and in which order change from release to release, as does the internal implementation of code for a barrier, or to perform a reduction.

1. Before the first parallel region

Before the first parallel region is entered, there is only the one thread, the master thread. The call stack is identical to that in User mode.

Master		
foo		
main		
_start		

2. During execution in a parallel region

Master	Slave 1	Slave 2	Slave 3
foo-OMP			
libmtsk			
foo	foo-OMP	foo-OMP	foo-OMP
main	libmtsk	libmtsk	libmtsk
_start	_lwp_start	_lwp_start	_lwp_start

In Machine mode, the slave threads are shown as starting in $_{\text{lwp_start}}$, rather than in $_{\text{start}}$ where the master starts. (In some versions of the thread library, that function may appear as $_{\text{thread_start}}$.)

3. At the point at which all threads are at a barrier

Master	Slave 1	Slave 2	Slave 3
libmtsk			
foo-OMP			
foo	libmtsk	libmtsk	libmtsk
main	foo-OMP	foo-OMP	foo-OMP
_start	_lwp_start	_lwp_start	_lwp_start

Unlike when the threads are executing in the parallel region, when the threads are waiting at a barrier there are no frames from the OpenMP runtime between foo and the parallel region code, foo-OMP.... The reason is that the real execution does not include the OMP parallel

region function, but the OpenMP runtime manipulates registers so that the stack unwind shows a call from the last-executed parallel region function to the runtime barrier code. Without it, there would be no way to determine which parallel region is related to the barrier call in Machine mode.

4. After leaving the parallel region

Master	Slave 1	Slave 2	Slave 3
foo			
main	libmtsk	libmtsk	libmtsk
_start	_lwp_start	_lwp_start	_lwp_start

In the slave threads, no user frames are on the call stack.

5. When in a nested parallel region

Master	Slave 1	Slave 2	Slave 3	Slave 4
	bar-OMP			
foo-OMP	libmtsk			
libmtsk	bar			
foo	foo-OMP	foo-OMP	foo-OMP	bar-OMP
main	libmtsk	libmtsk	libmtsk	libmtsk
_start	_lwp_start	_lwp_start	_lwp_start	_lwp_start

Incomplete Stack Unwinds

Stack unwind might fail for a number of reasons:

- If the stack has been corrupted by the user code; if so, the program might core dump, or the data collection code might core dump, depending on exactly how the stack was corrupted.
- If the user code does not follow the standard ABI conventions for function calls. In particular, on the SPARC platform, if the return register, %07, is altered before a save instruction is executed.

On any platform, hand-written assembler code might violate the conventions.

• If the leaf PC is in a function after the callee's frame is popped from the stack, but before the function returns.

• If the call stack contains more than about 250 frames, the Collector does not have the space to completely unwind the call stack. In this case, PCs for functions from _start to some point in the call stack are not recorded in the experiment. The artificial function <Truncated-stack> is shown as called from <Total> to tally the topmost frames recorded.

Intermediate Files

If you generate intermediate files using the -E or -P compiler options, the Analyzer uses the intermediate file for annotated source code, not the original source file. The #line directives generated with -E can cause problems in the assignment of metrics to source lines.

The following line appears in annotated source if there are instructions from a function that do not have line numbers referring to the source file that was compiled to generate the function:

function_name -- <instructions without line numbers>

Line numbers can be absent under the following circumstances:

- You compiled without specifying the -g option.
- The debugging information was stripped after compilation, or the executables or object files that contain the information are moved or deleted or subsequently modified.
- The function contains code that was generated from #include files rather than from the original source file.
- At high optimization, if code was inlined from a function in a different file.
- The source file has #line directives referring to some other file; compiling with the -E option, and then compiling the resulting .i file is one way in which this happens. It may also happen when you compile with the -P flag.
- The object file cannot be found to read line number information.
- The compiler used generates incomplete line number tables.

Mapping Addresses to Program Structure

Once a call stack is processed into PC values, the Analyzer maps those PCs to shared objects, functions, source lines, and disassembly lines (instructions) in the program. This section describes those mappings.

The Process Image

When a program is run, a process is instantiated from the executable for that program. The process has a number of regions in its address space, some of which are text and represent executable instructions, and some of which are data that is not normally executed. PCs as recorded in the call stack normally correspond to addresses within one of the text segments of the program.

The first text section in a process derives from the executable itself. Others correspond to shared objects that are loaded with the executable, either at the time the process is started, or dynamically loaded by the process. The PCs in a call stack are resolved based on the executable and shared objects loaded at the time the call stack was recorded. Executables and shared objects are very similar, and are collectively referred to as load objects.

Because shared objects can be loaded and unloaded in the course of program execution, any given PC might correspond to different functions at different times during the run. In addition, different PCs at different times might correspond to the same function, when a shared object is unloaded and then reloaded at a different address.

Load Objects and Functions

Each load object, whether an executable or a shared object, contains a text section with the instructions generated by the compiler, a data section for data, and various symbol tables. All load objects must contain an ELF symbol table, which gives the names and addresses of all the globally-known functions in that object. Load objects compiled with the -g option contain additional symbolic information, which can augment the ELF symbol table and provide information about functions that are not global, additional information about object modules from which the functions came, and line number information relating addresses to source lines.

The term *function* is used to describe a set of instructions that represent a high-level operation described in the source code. The term covers subroutines as used in Fortran, methods as used in C++ and the Java programming language, and the like. Functions are described cleanly in the source code, and normally their names appear in the symbol table representing a set of addresses; if the program counter is within that set, the program is executing within that function.

In principle, any address within the text segment of a load object can be mapped to a function. Exactly the same mapping is used for the leaf PC and all the other PCs on the call stack. Most of the functions correspond directly to the source model of the program. Some do not; these functions are described in the following sections.

Aliased Functions

Typically, functions are defined as global, meaning that their names are known everywhere in the program. The name of a global function must be unique within the executable. If there is more than one global function of a given name within the address space, the runtime linker resolves all references to one of them. The others are never executed, and so do not appear in the function list. In the Summary tab, you can see the shared object and object module that contain the selected function.

Under various circumstances, a function can be known by several different names. A very common example of this is the use of so-called weak and strong symbols for the same piece of code. A strong name is usually the same as the corresponding weak name, except that it has a

leading underscore. Many of the functions in the threads library also have alternate names for pthreads and Solaris threads, as well as strong and weak names and alternate internal symbols. In all such cases, only one name is used in the function list of the Analyzer. The name chosen is the last symbol at the given address in alphabetic order. This choice most often corresponds to the name that the user would use. In the Summary tab, all the aliases for the selected function are shown.

Non-Unique Function Names

While aliased functions reflect multiple names for the same piece of code, under some circumstances, multiple pieces of code have the same name:

- Sometimes, for reasons of modularity, functions are defined as static, meaning that their names are known only in some parts of the program (usually a single compiled object module). In such cases, several functions of the same name referring to quite different parts of the program appear in the Analyzer. In the Summary tab, the object module name for each of these functions is given to distinguish them from one another. In addition, any selection of one of these functions can be used to show the source, disassembly, and the callers and callees of that specific function.
- Sometimes a program uses wrapper or interposition functions that have the weak name of a function in a library and supersede calls to that library function. Some wrapper functions call the original function in the library, in which case both instances of the name appear in the Analyzer function list. Such functions come from different shared objects and different object modules, and can be distinguished from each other in that way. The Collector wraps some library functions, and both the wrapper function and the real function can appear in the Analyzer.

Static Functions From Stripped Shared Libraries

Static functions are often used within libraries, so that the name used internally in a library does not conflict with a name that you might use. When libraries are stripped, the names of static functions are deleted from the symbol table. In such cases, the Analyzer generates an artificial name for each text region in the library containing stripped static functions. The name is of the form <static>@0x12345, where the string following the @ sign is the offset of the text region within the library. The Analyzer cannot distinguish between contiguous stripped static functions and a single such function, so two or more such functions can appear with their metrics coalesced.

Stripped static functions are shown as called from the correct caller, except when the PC from the static function is a leaf PC that appears after the save instruction in the static function. Without the symbolic information, the Analyzer does not know the save address, and cannot tell whether to use the return register as the caller. It always ignores the return register. Since several functions can be coalesced into a single <static>@0x12345 function, the real caller or callee might not be distinguished from the adjacent functions.

Fortran Alternate Entry Points

Fortran provides a way of having multiple entry points to a single piece of code, allowing a caller to call into the middle of a function. When such code is compiled, it consists of a prologue for the main entry point, a prologue to the alternate entry point, and the main body of code for the function. Each prologue sets up the stack for the function's eventual return and then branches or falls through to the main body of code.

The prologue code for each entry point always corresponds to a region of text that has the name of that entry point, but the code for the main body of the subroutine receives only one of the possible entry point names. The name received varies from one compiler to another.

The prologues rarely account for any significant amount of time, and the functions corresponding to entry points other than the one that is associated with the main body of the subroutine rarely appear in the Analyzer. Call stacks representing time in Fortran subroutines with alternate entry points usually have PCs in the main body of the subroutine, rather than the prologue, and only the name associated with the main body appears as a callee. Likewise, all calls from the subroutine are shown as being made from the name associated with the main body of the subroutine.

Cloned Functions

The compilers have the ability to recognize calls to a function for which extra optimization can be performed. An example of such calls is a call to a function for which some of the arguments are constants. When the compiler identifies particular calls that it can optimize, it creates a copy of the function, which is called a clone, and generates optimized code. The clone function name is a mangled name that identifies the particular call. The Analyzer demangles the name, and presents each instance of a cloned function separately in the function list. Each cloned function has a different set of instructions, so the annotated disassembly listing shows the cloned functions separately. Each cloned function has the same source code, so the annotated source listing sums the data over all copies of the function.

Inlined Functions

An inlined function is a function for which the instructions generated by the compiler are inserted at the call site of the function instead of an actual call. There are two kinds of inlining, both of which are done to improve performance, and both of which affect the Analyzer.

■ C++ inline function definitions. The rationale for inlining in this case is that the cost of calling a function is much greater than the work done by the inlined function, so it is better to simply insert the code for the function at the call site, instead of setting up a call. Typically, access functions are defined to be inlined, because they often only require one instruction. When you compile with the -g option, inlining of functions is disabled; compilation with -g0 permits inlining of functions, and is recommended.

Explicit or automatic inlining performed by the compiler at high optimization levels (4 and 5). Explicit and automatic inlining is performed even when -g is turned on. The rationale for this type of inlining can be to save the cost of a function call, but more often it is to provide more instructions for which register usage and instruction scheduling can be optimized.

Both kinds of inlining have the same effect on the display of metrics. Functions that appear in the source code but have been inlined do not show up in the function list, nor do they appear as callees of the functions into which they have been inlined. Metrics that would otherwise appear as inclusive metrics at the call site of the inlined function, representing time spent in the called function, are actually shown as exclusive metrics attributed to the call site, representing the instructions of the inlined function.

Note – Inlining can make data difficult to interpret, so you might want to disable inlining when you compile your program for performance analysis.

In some cases, even when a function is inlined, a so-called out-of-line function is left. Some call sites call the out-of-line function, but others have the instructions inlined. In such cases, the function appears in the function list but the metrics attributed to it represent only the out-of-line calls.

Compiler-Generated Body Functions

When a compiler parallelizes a loop in a function, or a region that has parallelization directives, it creates new body functions that are not in the original source code. These functions are described in "Overview of OpenMP Software Execution" on page 154.

The Analyzer shows these functions as normal functions, and assigns a name to them based on the function from which they were extracted, in addition to the compiler-generated name. Their exclusive metrics and inclusive metrics represent the time spent in the body function. In addition, the function from which the construct was extracted shows inclusive metrics from each of the body functions. The means by which this is achieved is described in "Overview of OpenMP Software Execution" on page 154.

When a function containing parallel loops is inlined, the names of its compiler-generated body functions reflect the function into which it was inlined, not the original function.

Note – The names of compiler-generated body functions can only be demangled for modules compiled with -g.

Outline Functions

Outline functions can be created during feedback-optimized compilations. They represent code that is not normally executed, specifically code that is not executed during the training run used to generate the feedback for the final optimized compilation. A typical example is code that performs error checking on the return value from library functions; the error-handling code is never normally run. To improve paging and instruction-cache behavior, such code is moved elsewhere in the address space, and is made into a separate function. The name of the outline function encodes information about the section of outlined code, including the name of the function from which the code was extracted and the line number of the beginning of the section in the source code. These mangled names can vary from release to release. The Analyzer provides a readable version of the function name.

Outline functions are not really called, but rather are jumped to; similarly they do not return, they jump back. In order to make the behavior more closely match the user's source code model, the Analyzer imputes an artificial call from the main function to its outline portion.

Outline functions are shown as normal functions, with the appropriate inclusive and exclusive metrics. In addition, the metrics for the outline function are added as inclusive metrics in the function from which the code was outlined.

For further details on feedback-optimized compilations, refer to the description of the -xprofile compiler option in *Appendix B* of the *C User's Guide*, *Appendix A* of the *C++ User's Guide*, or *Chapter 3* of the *Fortran User's Guide*.

Dynamically Compiled Functions

Dynamically compiled functions are functions that are compiled and linked while the program is executing. The Collector has no information about dynamically compiled functions that are written in C or C++, unless the user supplies the required information using the Collector API functions. See "Dynamic Functions and Modules" on page 47 for information about the API functions. If information is not supplied, the function appears in the performance analysis tools as <Unknown>.

For Java programs, the Collector obtains information on methods that are compiled by the Java HotSpot virtual machine, and there is no need to use the API functions to provide the information. For other methods, the performance tools show information for the JVM software that executes the methods. In the Java representation, all methods are merged with the interpreted version. In the machine representation, each HotSpot-compiled version is shown separately, and JVM functions are shown for each interpreted method.

The <Unknown> Function

Under some circumstances, a PC does not map to a known function. In such cases, the PC is mapped to the special function named <Unknown>.

The following circumstances show PCs mapping to <Unknown>:

- When a function written in C or C++ is dynamically generated, and information about the function is not provided to the Collector using the Collector API functions. See "Dynamic Functions and Modules" on page 47 for more information about the Collector API functions.
- When a Java method is dynamically compiled but Java profiling is disabled.
- When the PC corresponds to an address in the data section of the executable or a shared object. One case is the SPARC V7 version of libc.so, which has several functions (.mul and .div, for example) in its data section. The code is in the data section so that it can be dynamically rewritten to use machine instructions when the library detects that it is executing on a SPARC V8 or SPARC V9 platform.
- When the PC corresponds to a shared object in the address space of the executable that is not recorded in the experiment.
- When the PC is not within any known load object. The most likely cause is an unwind failure, where the value recorded as a PC is not a PC at all, but rather some other word. If the PC is the return register, and it does not seem to be within any known load object, it is ignored, rather than attributed to the <Unknown> function.
- When a PC maps to an internal part of the JVM software for which the Collector has no symbolic information.

Callers and callees of the <Unknown> function represent the previous and next PCs in the call stack, and are treated normally.

OpenMP Special Functions

Artificial functions are constructed and put onto the User mode call stacks reflecting events in which a thread was in some state within the OpenMP runtime library. The following artificial functions are defined; each is followed by a description of its function:

- <0MP-overhead> executing in the OpenMP library
- <OMP-idle> slave thread, waiting for work
- <OMP-reduction> thread performing a reduction operation
- <OMP-implicit_barrier> thread waiting at an implicit barrier
- <OMP-explicit barrier> thread waiting at an explicit barrier
- <OMP-lock_wait> thread waiting for a lock

- <OMP-critical section wait> thread waiting to enter a critical section
- <0MP-ordered section wait> thread waiting for its turn to enter an ordered section

The <JVM-System> Function

In the User representation, the <JVM-System> function represents time used by the JVM software performing actions other than running a Java program. In this time interval, the JVM software is performing tasks such as garbage collection and HotSpot compilation. By default, <JVM-System> is visible in the Function list.

The < no Java callstack recorded > Function

The <no Java callstack recorded> function is similar to the <Unknown> function, but for Java threads, in the Java representation only. When the Collector receives an event from a Java thread, it unwinds the native stack and calls into the JVM software to obtain the corresponding Java stack. If that call fails for any reason, the event is shown in the Analyzer with the artificial function <no Java callstack recorded>. The JVM software might refuse to report a call stack either to avoid deadlock, or when unwinding the Java stack would cause excessive synchronization.

The < Truncated - stack > Function

The size of the buffer used by the Analyzer for recording the metrics of individual functions in the call stack is limited. If the size of the call stack becomes so large that the buffer becomes full, any further increase in size of the call stack will force the analyzer to drop function profile information. Since in most programs the bulk of exclusive CPU time is spent in the leaf functions, the Analyzer drops the metrics for functions the less critical functions at the bottom of the stack, starting with the entry functions <code>_start()</code> and <code>main()</code>. The metrics for the dropped functions are consolidated into the single artificial <code><Truncated-stack></code> function. The <code><Truncated-stack></code> function may also appear in Java programs.

The < Total > Function

The <Total> function is an artificial construct used to represent the program as a whole. All performance metrics, in addition to being attributed to the functions on the call stack, are attributed to the special function <Total>. The function appears at the top of the function list and its data can be used to give perspective on the data for other functions. In the Callers-Callees list, it is shown as the nominal caller of _start() in the main thread of execution of any program, and also as the nominal caller of _thread_start() for created threads. If the stack unwind was incomplete, the <Total> function can appear as the caller of <Truncated-stack>.

Functions Related to Hardware Counter Overflow Profiling

The following functions are related to hardware counter overflow profiling:

- collector not program related: The counter does not relate to the program.
- collector_lost_hwc_overflow: The counter appears to have exceeded the overflow value without generating an overflow signal. The value is recorded and the counter reset.
- collector_lost_sigemt: The counter appears to have exceeded the overflow value and been halted but the overflow signal appears to be lost. The value is recorded and the counter reset.
- collector_hwc_ABORT: Reading the hardware counters has failed, typically when a
 privileged process has taken control of the counters, resulting in the termination of
 hardware counter collection.
- collector_final_counters: The values of the counters taken immediately before suspending or terminating collection, with the count since the previous overflow. If this corresponds to a significant fraction of the <Total> count, a smaller overflow interval (that is, a higher resolution configuration) is recommended.
- collector_record_counters: The counts accumulated while handling and recording
 hardware counter events, partially accounting for hardware counter overflow profiling
 overhead. If this corresponds to a significant fraction of the <Total> count, a larger overflow
 interval (that is, a lower resolution configuration) is recommended.

Mapping Performance Data to Index Objects

Index objects represent sets of things whose index can be computed from the data recorded in each packet. Index-object sets that are predefined include: Threads, Cpus, Samples, and Seconds. Other index objects may be defined either through the er_print indxobj_define command, issued directly or in a .er.rc file. In the IDE, you can define index objects by selecting Set Data Presentation from the View menu, selecting the Tabs tab, and clicking the Add Custom Index Object button.

For each packet, the index is computed and the metrics associated with the packet are added to the Index Object at that index. An index of -1 maps to the <Unknown> Index Object. All metrics for index objects are exclusive metrics, as no hierarchical representation of index objects is meaningful.

Mapping Data Addresses to Program Data Objects

Once a PC from a hardware counter event corresponding to a memory operation has been processed to successfully backtrack to a likely causal memory-referencing instruction, the Analyzer uses instruction identifiers and descriptors provided by the compiler in its hardware profiling support information to derive the associated program data object.

The term data object is used to refer to program constants, variables, arrays and aggregates such as structures and unions, along with distinct aggregate elements, described in source code. Depending on the source language, data object types and their sizes vary. Many data objects are explicitly named in source programs, while others may be unnamed. Some data objects are derived or aggregated from other (simpler) data objects, resulting in a rich, often complex, set of data objects.

Each data object has an associated scope, the region of the source program where it is defined and can be referenced, which may be global (such as a load object), a particular compilation unit (an object file), or function. Identical data objects may be defined with different scopes, or particular data objects referred to differently in different scopes.

Data-derived metrics from hardware counter events for memory operations collected with backtracking enabled are attributed to the associated program data object type and propagate to any aggregates containing the data object and the artificial <Total>, which is considered to contain all data objects (including <Unknown> and <Scalars>). The different subtypes of <Unknown> propagate up to the <Unknown> aggregate. The following section describes the <Total>, <Scalars>, and <Unknown> data objects.

Data Object Descriptors

Data objects are fully described by a combination of their declared type and name. A simple scalar data object {int i} describes a variable called i of type int, while {const+pointer+int p} describes a constant pointer to a type int called p. Spaces in the type names are replaced with underscore (_), and unnamed data objects are represented with a name of dash (-), for example: {double_precision_complex -}.

An entire aggregate is similarly represented {structure:foo_t} for a structure of type foo_t. An element of an aggregate requires the additional specification of its container, for example, {structure:foo_t}. {int i} for a member i of type int of the previous structure of type foo_t. Aggregates can also themselves be elements of (larger) aggregates, with their corresponding descriptor constructed as a concatenation of aggregate descriptors and ultimately a scalar descriptor.

While a fully-qualified descriptor may not always be necessary to disambiguate data objects, it provides a generic complete specification to assist with data object identification.

The <Total > Data Object

The <Total> data object is an artificial construct used to represent the program's data objects as a whole. All performance metrics, in addition to being attributed to a distinct data object (and any aggregate to which it belongs), are attributed to the special data object <Total>. It appears at the top of the data object list and its data can be used to give perspective to the data for other data objects.

The <Scalars> Data Object

While aggregate elements have their performance metrics additionally attributed into the metric value for their associated aggregate, all of the scalar constants and variables have their performance metrics additionally attributed into the metric value for the artificial <Scalars> data object.

The <Unknown> Data Object and Its Elements

Under various circumstances, event data can not be mapped to a particular data object. In such cases, the data is mapped to the special data object named <Unknown> and one of its elements as described below.

- Module with trigger PC not compiled with -xhwcprof
 No event-causing instruction or data object was identified because the object code was not compiled with hardware counter profiling support.
- Backtracking failed to find a valid branch target
 - No event-causing instruction was identified because the hardware profiling support information provided in the compilation object was insufficient to verify the validity of backtracking.
- Backtracking traversed a branch target
 - No event-causing instruction or data object was identified because backtracking encountered a control transfer target in the instruction stream.
- No identifying descriptor provided by the compiler
 Backtracking determined the likely causal memory-referencing instruction, but its associated data object was not specified by the compiler.
- No type information
 - Backtracking determined the likely event-causing instruction, but the instruction was not identified by the compiler as a memory-referencing instruction.
- Not determined from the symbolic information provided by the compiler
 Backtracking determined the likely causal memory-referencing instruction, but it was not identified by the compiler and associated data object determination is therefore not possible. Compiler temporaries are generally unidentified.
- Backtracking was prevented by a jump or call instruction

No event-causing instructions were identified because backtracking encountered a branch or call instruction in the instruction stream.

- Backtracking did not find trigger PC
 No event-causing instructions were found within the maximum backtracking range.
- Could not determine VA because registers changed after trigger instruction
 The virtual address of the data object was not determined because registers were overwritten during hardware counter skid.
- Memory-referencing instruction did not specify a valid VA
 The virtual address of the data object did not appear to be valid.

Mapping Performance Data to Memory Objects

Memory objects are components in the memory subsystem, such as cache-lines, pages, and memory-banks. The object is determined from an index computed from the virtual and/or physical address as recorded. Memory objects are predefined for virtual pages and physical pages, for sizes of 8 KB, 64 KB, 512 KB, and 4 MB. You can define others with the mobj_define command in the er_print utility. You can also define custom memory objects using the Add Memory Objects dialog box in the Analyzer, which you can open by clicking the Add Custom Memory Object button in the Set Data Presentation dialog box.



Understanding Annotated Source and Disassembly Data

Annotated source code and annotated disassembly code are useful for determining which source lines or instructions within a function are responsible for poor performance, and to view commentary on how the compiler has performed transformations on the code. This section describes the annotation process and some of the issues involved in interpreting the annotated code.

Annotated Source Code

Annotated source code for an experiment can be viewed in the Performance Analyzer by selecting the Source tab in the left pane of the Analyzer window. Alternatively, annotated source code can be viewed without running an experiment, using the er_src utility. This section of the manual describes how source code is displayed in the Performance Analyzer. For details on viewing annotated source code with the er_src utility, see "Viewing Source/Disassembly Without An Experiment" on page 195.

Annotated source in the Analyzer contains the following information:

- The contents of the original source file
- The performance metrics of each line of executable source code
- Highlighting of code lines with metrics exceeding a specific threshold
- Index lines
- Compiler commentary

Performance Analyzer Source Tab Layout

The Source tab is divided into columns, with fixed-width columns for individual metrics on the left and the annotated source taking up the remaining width on the right.

Identifying the Original Source Lines

All lines displayed in black in the annotated source are taken from the original source file. The number at the start of a line in the annotated source column corresponds to the line number in the original source file. Any lines with characters displayed in a different color are either index lines or compiler commentary lines.

Index Lines in the Source Tab

A source file is any file compiled to produce an object file or interpreted into byte code. An object file normally contains one or more regions of executable code corresponding to functions, subroutines, or methods in the source code. The Analyzer analyzes the object file, identifies each executable region as a function, and attempts to map the functions it finds in the object code to the functions, routines, subroutines, or methods in the source file associated with the object code. When the analyzer succeeds, it adds an index line in the annotated source file in the location corresponding to the first instruction in the function found in the object code.

The annotated source shows an index line for every function—including inline functions—even though inline functions are not displayed in the list displayed by the Function tab. The Source tab displays index lines in red italics with text in angle-brackets. The simplest type of index line corresponds to the function's default context. The default source context for any function is defined as the source file to which the first instruction in that function is attributed. The following example shows an index line for a C function icputime.

As can be seen from the above example, the index line appears on the line following the first instruction. For C source, the first instruction corresponds to the opening brace at the start of the function body. In Fortran source, the index line for each subroutine follows the line containing the subroutine keyword. Also, a main function index line follows the first Fortran source instruction executed when the application starts, as shown in the following example:

```
0.
0.
                  1. ! Copyright 02/04/2000 Sun Microsystems, Inc. All Rights Reserved
0.
         0.
Ø
                  3. ! Synthetic f90 program, used for testing openmp directives and
0.
         0.
                  4. ! the analyzer
0
         0.
0.
         0.
                  !$PRAGMA C (gethrtime, gethrvtime)
Ø
         0.
                  7.
0.
         81.497
                   [ 8] 9000
                                 format('X', f7.3, 7x, f7.3, 4x, a)
0.
         0.
                        <Function: main>
```

Sometimes, the Analyzer might not be able to map a function it finds in the object code with any programming instructions in the source file associated with that object code; for example, code may be #included or inlined from another file, such as a header file.

If the source for the object code is not the default source context for a function contained in the object code, then the annotated source corresponding to the object code contains a special index line cross-referring to the function's default source context. For example, compiling the synprog demo creates an object module, endcases.o corresponding to source file endcases.c. The source in endcases.c declares function inc_func, which is defined in header inc_func.h. Headers often include inline function definitions in this way. Because endcases.c declares function inc_func, but no source line within endcases.c corresponds to the instructions of inc_func, the top of the annotated source file for endcases.c displays a special index line, as follows:

```
0.650 0.650 <Function: inc_func, instructions from source file inc_func.h>
```

The metrics on the index line indicates that part of the code from the endcases.o object module does not have line-mappings (within the source file endcases.c).

The Analyzer also adds a standard index line in the annotated source for inc_func.h, where the function inc_func is defined.

Similarly, if a function has an *alternate* source context, then an index line cross referring to that context is displayed in the annotated source for the *default* source context.

Double-clicking on an index line referring to another source context will display the contents of that source file in the source window.

Also displayed in red are special index lines and other special lines that are not compiler commentary. For example, as a result of compiler optimization, a special index line might be created for a function in the object code that does not correspond to code written in any source file. For details, refer to "Special Lines in the Source, Disassembly and PCs Tabs" on page 188.

Compiler Commentary

Compiler commentary indicates how compiler-optimized code has been generated. Compiler commentary lines are displayed in blue, to distinguish them from index lines and original source lines. Various parts of the compiler can incorporate commentary into the executable. Each comment is associated with a specific line of source code. When the annotated source is written, the compiler commentary for any source line appears immediately preceding the source line.

The compiler commentary describes many of the transformations which have been made to the source code to optimize it. These transformations include loop optimizations, parallelization, inlining and pipelining. The following shows an example of compiler commentary.

```
Function freegraph inlined from source file ptraliasstr.c into
                    the code for the following line
0.
         0.
                             freegraph();
                    48
0
         a
                    49.
                          for (j=0;j<ITER;j++) {
                    Function initgraph inlined from source file ptraliasstr.c into
                    the code for the following line
0.
                    50.
         0.
                              initgraph(rows);
                    Function setvalsmod inlined from source file ptraliasstr.c into
                    the code for the following line
                    Loop below fissioned into 2 loops
                    Loop below fused with loop on line 51
                    Loop below had iterations peeled off for better unrolling and/or
                    parallelization
                    Loop below scheduled with steady-state cycle count = 3
                    Loop below unrolled 8 times
                    Loop below has 0 loads, 3 stores, 3 prefetches, 0 FPadds,
                    0 FPmuls, and FPdivs per iteration
                              setvalsmod():
```

Note that the commentary for line 51 includes loop commentary because the function setvalsmod() contains loop code, and the function has been inlined.

You can set the types of compiler commentary displayed in the Source tab using the Source/Disassembly tab in the Set Data Presentation dialog box; for details, see "Setting Data Presentation Options" on page 92.

Common Subexpression Elimination

One very common optimization recognizes that the same expression appears in more than one place, and that performance can be improved by generating the code for that expression in one place. For example, if the same operation appears in both the if and the else branches of a

block of code, the compiler can move that operation to just before the if statement. When it does so, it assigns line numbers to the instructions based on one of the previous occurrences of the expression. If the line numbers assigned to the common code correspond to one branch of an if structure, and the code actually always takes the other branch, the annotated source shows metrics on lines within the branch that is not taken.

Loop Optimizations

The compiler can do several types of loop optimization. Some of the more common ones are as follows:

- Loop unrolling
- Loop peeling
- Loop interchange
- Loop fission
- Loop fusion

Loop unrolling consists of repeating several iterations of a loop within the loop body, and adjusting the loop index accordingly. As the body of the loop becomes larger, the compiler can schedule the instructions more efficiently. Also reduced is the overhead caused by the loop index increment and conditional check operations. The remainder of the loop is handled using loop peeling.

Loop peeling consists of removing a number of loop iterations from the loop, and moving them in front of or after the loop, as appropriate.

Loop interchange changes the ordering of nested loops to minimize memory stride, to maximize cache-line hit rates.

Loop fusion consists of combining adjacent or closely located loops into a single loop. The benefits of loop fusion are similar to loop unrolling. In addition, if common data is accessed in the two pre-optimized loops, cache locality is improved by loop fusion, providing the compiler with more opportunities to exploit instruction-level parallelism.

Loop fission is the opposite of loop fusion: a loop is split into two or more loops. This optimization is appropriate if the number of computations in a loop becomes excessive, leading to register spills that degrade performance. Loop fission can also come into play if a loop contains conditional statements. Sometimes it is possible to split the loops into two: one with the conditional statement and one without. This can increase opportunities for software pipelining in the loop without the conditional statement.

Sometimes, with nested loops, the compiler applies loop fission to split a loop apart, and then performs loop fusion to recombine the loop in a different way to increase performance. In this case, you see compiler commentary similar to the following:

```
Loop below fissioned into 2 loops
Loop below fused with loop on line 116
[116] for (i=0;i<nvtxs;i++) {
```

Inlining of Functions

With an inline function, the compiler inserts the function instructions directly at the locations where it is called instead of making actual function calls. Thus, similar to a C/C++ macro, the instructions of an inline function are replicated at each call location. The compiler performs explicit or automatic inlining at high optimization levels (4 and 5). Inlining saves the cost of a function call and provides more instructions for which register usage and instruction scheduling can be optimized, at the cost of a larger code footprint in memory. The following is an example of inlining compiler commentary.

Note – The compiler commentary does not wrap onto two lines in the Source tab of the Analyzer.

Parallelization

If your code contains Sun, Cray, or OpenMP parallelization directives, it can be compiled for parallel execution on multiple processors. The compiler commentary indicates where parallelization has and has not been performed, and why. The following shows an example of parallelization computer commentary.

```
0.
         6.324
                     9. c$omp parallel do shared(a,b,c,n) private(i,j,k)
0.
         0.
                   Loop below parallelized by explicit user directive
                   Loop below interchanged with loop on line 12
0.010
         0.010
                   [10]
                                   do i = 2, n-1
                   Loop below not parallelized because it was nested in a parallel loop
                   Loop below interchanged with loop on line 12
0.170
         0.170
                    11.
                                       do j = 2, i
```

For more details about parallel execution and compiler-generated body functions, refer to "Overview of OpenMP Software Execution" on page 154.

Special Lines in the Annotated Source

Several other annotations for special cases can be shown under the Source tab, either in the form of compiler commentary, or as special lines displayed in the same color as index lines. For details, refer to "Special Lines in the Source, Disassembly and PCs Tabs" on page 188.

Source Line Metrics

Source code metrics are displayed, for each line of executable code, in fixed-width columns. The metrics are the same as in the function list. You can change the defaults for an experiment using a .er.rc file; for details, see "Commands That Set Defaults" on page 129. You can also change the metrics displayed and highlighting thresholds in the Analyzer using the Set Data Presentation dialog box; for details, see "Setting Data Presentation Options" on page 92.

Annotated source code shows the metrics of an application at the source-line level. It is produced by taking the PCs (program counts) that are recorded in the application's call stack, and mapping each PC to a source line. To produce an annotated source file, the Analyzer first determines all of the functions that are generated in a particular object module (.o file) or load object, then scans the data for all PCs from each function. In order to produce annotated source, the Analyzer must be able to find and read the object module or load object to determine the mapping from PCs to source lines, and it must be able to read the source file to produce an annotated copy, which is displayed. The Analyzer searches for the source file, object file, and executable files in the following default locations in turn, and stops when it finds a file of the correct basename:

- The archive directories of experiments
- The current working directory
- The absolute pathname as recorded in the executables or compilation objects

The default can be changed by the addpath or setpath directive, or by the Analyzer GUI.

If a file cannot be found using the path list set by addpath or setpath, you can specify one or more path remappings with the pathmap command. With the pathmap command you specify an *old-prefix* and *new-prefix*. In any pathname for a source file, object file, or shared object that begins with the prefix specified with *old-prefix*, the old prefix is replaced by the prefix specified with *new-prefix*. The resulting path is then used to find the file. Multiple pathmap commands can be supplied, and each is tried until the file is found.

The compilation process goes through many stages, depending on the level of optimization requested, and transformations take place which can confuse the mapping of instructions to source lines. For some optimizations, source line information might be completely lost, while for others, it might be confusing. The compiler relies on various heuristics to track the source line for an instruction, and these heuristics are not infallible.

Interpreting Source Line Metrics

Metrics for an instruction must be interpreted as metrics accrued while waiting for the instruction to be executed. If the instruction being executed when an event is recorded comes from the same source line as the leaf PC, the metrics can be interpreted as due to execution of that source line. However, if the leaf PC comes from a different source line than the instruction being executed, at least some of the metrics for the source line that the leaf PC belongs to must be interpreted as metrics accumulated while this line was waiting to be executed. An example is when a value that is computed on one source line is used on the next source line.

The issue of how to interpret the metrics matters most when there is a substantial delay in execution, such as at a cache miss or a resource queue stall, or when an instruction is waiting for a result from a previous instruction. In such cases the metrics for the source lines can seem to be unreasonably high, and you should look at other lines in the code to find the line responsible for the high metric value.

Metric Formats

The four possible formats for the metrics that can appear on a line of annotated source code are explained in Table 8-1.

TABLE 8-1 Annotated Source-Code Metrics

Metric	Significance
(Blank)	No PC in the program corresponds to this line of code. This case should always apply to comment lines, and applies to apparent code lines in the following circumstances: All the instructions from the apparent piece of code have been eliminated during optimization.
	 The code is repeated elsewhere, and the compiler performed common subexpression recognition and tagged all the instructions with the lines for the other copy.
	■ The compiler tagged an instruction from that line with an incorrect line number.
0.	Some PCs in the program were tagged as derived from this line, but no data referred to those PCs: they were never in a call stack that was sampled statistically or traced. The 0. metric does not indicate that the line was not executed, only that it did not show up statistically in a profiling data packet or a recorded tracing data packet.
0.000	At least one PC from this line appeared in the data, but the computed metric value rounded to zero.
1.234	The metrics for all PCs attributed to this line added up to the non-zero numerical value shown.

Annotated Disassembly Code

Annotated disassembly provides an assembly-code listing of the instructions of a function or object module, with the performance metrics associated with each instruction. Annotated disassembly can be displayed in several ways, determined by whether line-number mappings and the source file are available, and whether the object module for the function whose annotated disassembly is being requested is known:

- If the object module is not known, the Analyzer disassembles the instructions for just the specified function, and does not show any source lines in the disassembly.
- If the object module is known, the disassembly covers all functions within the object module.

- If the source file is available, and line number data is recorded, the Analyzer can interleave the source with the disassembly, depending on the display preference.
- If the compiler has inserted any commentary into the object code, it too, is interleaved in the disassembly if the corresponding preferences are set.

Each instruction in the disassembly code is annotated with the following information.

- A source line number, as reported by the compiler
- Its relative address
- The hexadecimal representation of the instruction, if requested
- The assembler ASCII representation of the instruction

Where possible, call addresses are resolved to symbols (such as function names). Metrics are shown on the lines for instructions, and can be shown on any interleaved source code if the corresponding preference is set. Possible metric values are as described for source-code annotations, in Table 8–1.

The disassembly listing for code that is #included in multiple locations repeats the disassembly instructions once for each time that the code has been #included. The source code is interleaved only for the first time a repeated block of disassembly code is shown in a file. For example, if a block of code defined in a header called inc_body.h is #included by four functions named inc_body,inc_entry,inc_middle, and inc_exit, then the block of disassembly instructions appears four times in the disassembly listing for inc_body.h, but the source code is interleaved only in the first of the four blocks of disassembly instructions. Switching to Source tab reveals index lines corresponding to each of the times that the disassembly code was repeated.

Index lines can be displayed in the Disassembly tab. Unlike with the Source tab, these index lines cannot be used directly for navigation purposes. However, placing the cursor on one of the instructions immediately below the index line and selecting the Source tab navigates you to the file referenced in the index line.

Files that #include code from other files show the included code as raw disassembly instructions without interleaving the source code. However, placing the cursor on one of these instructions and selecting the Source tab opens the file containing the #included code. Selecting the Disassembly tab with this file displayed shows the disassembly code with interleaved source code.

Source code can be interleaved with disassembly code for inline functions, but not for macros.

When code is not optimized, the line numbers for each instruction are in sequential order, and the interleaving of source lines and disassembled instructions occurs in the expected way. When optimization takes place, instructions from later lines sometimes appear before those from earlier lines. The Analyzer's algorithm for interleaving is that whenever an instruction is shown as coming from line N, all source lines up to and including line N are written before the

instruction. One effect of optimization is that source code can appear between a control transfer instruction and its delay slot instruction. Compiler commentary associated with line *N* of the source is written immediately before that line.

Interpreting Annotated Disassembly

Interpreting annotated disassembly is not straightforward. The leaf PC is the address of the next instruction to execute, so metrics attributed to an instruction should be considered as time spent waiting for the instruction to execute. However, the execution of instructions does not always happen in sequence, and there might be delays in the recording of the call stack. To make use of annotated disassembly, you should become familiar with the hardware on which you record your experiments and the way in which it loads and executes instructions.

The next few subsections discuss some of the issues of interpreting annotated disassembly.

Instruction Issue Grouping

Instructions are loaded and issued in groups known as instruction issue groups. Which instructions are in the group depends on the hardware, the instruction type, the instructions already being executed, and any dependencies on other instructions or registers. As a result, some instructions might be underrepresented because they are always issued in the same clock cycle as the previous instruction, so they never represent the next instruction to be executed. And when the call stack is recorded, there might be several instructions that could be considered the next instruction to execute.

Instruction issue rules vary from one processor type to another, and depend on the instruction alignment within cache lines. Since the linker forces instruction alignment at a finer granularity than the cache line, changes in a function that might seem unrelated can cause different alignment of instructions. The different alignment can cause a performance improvement or degradation.

The following artificial situation shows the same function compiled and linked in slightly different circumstances. The two output examples shown below are the annotated disassembly listings from the er_print utility. The instructions for the two examples are identical, but the instructions are aligned differently.

In this example the instruction alignment maps the two instructions cmp and bl, a to different cache lines, and a significant amount of time is used waiting to execute these two instructions.

```
Excl. Incl.
User CPU User CPU
sec. sec.

1. static int
2. ifunc()
3. {
```

```
int i;
                              4.
                              5.
                              6.
                                      for (i=0; i<10000; i++)
                                 <function: ifunc>
   0.010
             0.010
                                 [ 61
                                          1066c: clr
                                                               %00
   0.
             Ø
                                  [ 6]
                                          10670: sethi
                                                               %hi(0x2400), %o5
   0.
             0.
                                  [6]
                                          10674: inc
                                                               784, %05
                              7.
                                          i++;
   0.
                                  [7]
                                                               2. %00
             0.
                                          10678: inc
## 1.360
             1.360
                                  [7]
                                          1067c:
                                                               %00, %05
                                                  cmp
## 1.510
             1.510
                                 [7]
                                          10680:
                                                  bl,a
                                                               0x1067c
   0.
             0.
                                 [7]
                                          10684:
                                                  inc
                                                               2, %00
   0.
                                 [7]
             0.
                                          10688:
                                                   retl
   0.
             0.
                                  [7]
                                          1068c:
                                                  gon
                              8.
                                      return i;
                              9. }
```

In this example, the instruction alignment maps the two instructions cmp and bl, a to the same cache line, and a significant amount of time is used waiting to execute only one of these instructions.

```
Excl.
             Incl.
          User CPU
User CPU
    sec.
               sec.
                               1. static int
                               2. ifunc()
                               3. {
                               4.
                                      int i:
                               5.
                                      for (i=0; i<10000; i++)
                                  <function: ifunc>
   0.
             0.
                                  [6]
                                          10684: clr
                                                                %00
   0.
             0.
                                  [6]
                                          10688: sethi
                                                                %hi(0x2400), %o5
                                  [6]
                                          1068c: inc
   0.
             0.
                                                                784, %05
                               7.
                                          i++;
   0.
             0.
                                  [7]
                                          10690: inc
                                                                2, %00
                                                                %00, %05
## 1.440
             1.440
                                  [7]
                                          10694: cmp
   0.
             0.
                                  [7]
                                          10698:
                                                  bl,a
                                                                0×10694
                                                                2, %00
   0.
             0.
                                  [7]
                                          1069c: inc
   0.
             0.
                                  [7]
                                          106a0:
                                                   retl
   0.
             0.
                                  [7]
                                          106a4:
                                                   nop
                               8.
                                      return i;
                               9. }
```

Instruction Issue Delay

Sometimes, specific leaf PCs appear more frequently because the instruction that they represent is delayed before issue. This can occur for a number of reasons, some of which are listed below:

- The previous instruction takes a long time to execute and is not interruptible, for example when an instruction traps into the kernel.
- An arithmetic instruction needs a register that is not available because the register contents
 were set by an earlier instruction that has not yet completed. An example of this sort of delay
 is a load instruction that has a data cache miss.
- A floating-point arithmetic instruction is waiting for another floating-point instruction to complete. This situation occurs for instructions that cannot be pipelined, such as square root and floating-point divide.
- The instruction cache does not include the memory word that contains the instruction (I-cache miss).
- On UltraSPARC* III processors, a cache miss on a load instruction blocks all instructions
 that follow it until the miss is resolved, regardless of whether these instructions use the data
 item that is being loaded. UltraSPARC II processors only block instructions that use the data
 item that is being loaded.

Attribution of Hardware Counter Overflows

Apart from TLB misses, the call stack for a hardware counter overflow event is recorded at some point further on in the sequence of instructions than the point at which the overflow occurred, for various reasons including the time taken to handle the interrupt generated by the overflow. For some counters, such as cycles or instructions issued, this delay does not matter. For other counters, such as those counting cache misses or floating point operations, the metric is attributed to a different instruction from that which is responsible for the overflow. Often the PC that caused the event is only a few instructions before the recorded PC, and the instruction can be correctly located in the disassembly listing. However, if there is a branch target within this instruction range, it might be difficult or impossible to tell which instruction corresponds to the PC that caused the event. For hardware counters that count memory access events, the Collector searches for the PC that caused the event if the counter name is prefixed with a plus, +.

Special Lines in the Source, Disassembly and PCs Tabs

Outline Functions

Outline functions can be created during feedback-optimized compilations. They are displayed as special index lines in the Source tab and Disassembly tab. In the Source tab, an annotation is displayed in the block of code that has been converted into an outline function.

```
Function binsearchmod inlined from source file ptralias2.c into the 0. 0. 58. if( binsearchmod( asize, &element ) ) { 0.240 0.240 59. if( key != (element << 1) ) { 0. 60. error |= BINSEARCHMODPOSTESTFAILED;
```

In the Disassembly tab, the outline functions are typically displayed at the end of the file.

```
<Function: main -- outline code from line 85 [ $o1D85.main]>
0.
         0.
                        [ 85] 100001034: sethi
                                                       %hi(0x100000), %i5
0
         a
                        [ 86] 100001038: bset
                                                       4, %i3
0.
                                                       %i5, 1, %l7
         0.
                        [ 85] 10000103c: or
0.
         0.
                        [ 85] 100001040: sllx
                                                       %17, 12, %15
0.
         0.
                        [ 85] 100001044: call
                                                       printf ! 0x100101300
Ø
                        [ 85] 100001048:
                                                       %15, 336, %00
0.
                        [ 90] 10000104c:
                                                       %i3. 0
0.
                        [ 20] 100001050: ba,a
                                                       0x1000010b4
                        <Function: main -- outline code from line 46 [ $o1A46.main]>
0.
         0.
                        [ 46] 100001054: mov
                                                       1, %i3
0.
                        [ 47] 100001058:
                                                       0×100001090
0.
                        [ 56] 10000105c: clr
                        <Function: main -- outline code from line 60 [ $o1B60.main]>
0.
                        [ 60] 100001060: bset
                                                       2. %i3
0.
                        [ 61] 100001064: ba
                                                       0x10000109c
0.
                        [ 74] 100001068: mov
                                                       1. %03
```

The name of the outline function is displayed in square brackets, and encodes information about the section of outlined code, including the name of the function from which the code was extracted and the line number of the beginning of the section in the source code. These mangled names can vary from release to release. The Analyzer provides a readable version of the function name. For further details, refer to "Outline Functions" on page 169.

If an outline function is called when collecting the performance data for an application, the Analyzer displays a special line in the annotated disassembly to show inclusive metrics for that function. For further details, see "Inclusive Metrics" on page 194.

Compiler-Generated Body Functions

When a compiler parallelizes a loop in a function, or a region that has parallelization directives, it creates new body functions that are not in the original source code. These functions are described in "Overview of OpenMP Software Execution" on page 154.

The compiler assigns mangled names to body functions that encode the type of parallel construct, the name of the function from which the construct was extracted, the line number of the beginning of the construct in the original source, and the sequence number of the parallel construct. These mangled names vary from release to release of the microtasking library, but are shown demangled into more comprehensible names.

The following shows a typical compiler-generated body function as displayed in the functions list.

```
7.415 14.860 psec_ -- OMP sections from line 9 [_$s1A9.psec_]
3.873 3.903 craydo -- MP doall from line 10 [ $d1A10.craydo ]
```

As can be seen from the above examples, the name of the function from which the construct was extracted is shown first, followed by the type of parallel construct, followed by the line number of the parallel construct, followed by the mangled name of the compiler-generated body function in square brackets. Similarly, in the disassembly code, a special index line is generated.

```
0.
                       <Function: psec -- OMP sections from line 9 [ $s1A9.psec ]>
        a
a
        7 445
                               1d8cc: save
                                                   %sp, -168, %sp
0.
        0.
                       [24]
                               1d8d0: ld
                                                   [%i0], %q1
        0.
Ø
                       [24]
                               1d8d4: tst
                                                   %i1
0.
        0.
                       <Function: craydo -- MP doall from line 10 [ $d1A10.craydo ]>
0.
        0.030
                       [ ?]
                               197e8: save
                                                   %sp, -128, %sp
0.
                       [?]
                               197ec: ld
                                                   [%i0 + 20], %i5
                       [?]
                               197f0: st
                                                   %i1, [%sp + 112]
0.
                       [ ?]
                               197f4: ld
                                                   [%i5]. %i3
```

With Cray directives, the function may not be correlated with source code line numbers. In such cases, a [?] is displayed in place of the line number. If the index line is shown in the annotated source code, the index line indicates instructions without line numbers, as shown below.

Note – Index lines and compiler-commentary lines do not wrap in the real displays.

Dynamically Compiled Functions

Dynamically compiled functions are functions that are compiled and linked while the program is executing. The Collector has no information about dynamically compiled functions that are

written in C or C++, unless the user supplies the required information using the Collector API function collector_func_load(). Information displayed by the Function tab, Source tab, and Disassembly tab depends on the information passed to collector_func_load() as follows:

- If information is not supplied—collector_func_load() is not called—the dynamically compiled and loaded function appears in the function list as <Unknown>. Neither function source nor disassembly code is viewable in the Analyzer.
- If no source file name and no line-number table is provided, but the name of the function, its size, and its address are provided, the name of the dynamically compiled and loaded function and its metrics appear in the function list. The annotated source is available, and the disassembly instructions are viewable, although the line numbers are specified by [?] to indicate that they are unknown.
- If the source file name is given, but no line-number table is provided, the information displayed by the Analyzer is similar to the case where no source file name is given, except that the beginning of the annotated source displays a special index line indicating that the function is composed of instructions without line numbers. For example:

 If the source file name and line-number table is provided, the function and its metrics are displayed by the Function tab, Source tab, and Disassembly tab in the same way as conventionally compiled functions.

For more information about the Collector API functions, see "Dynamic Functions and Modules" on page 47.

For Java programs, most methods are interpreted by the JVM software. The Java HotSpot virtual machine, running in a separate thread, monitors performance during the interpretive execution. During the monitoring process, the virtual machine may decide to take one or more interpreted methods, generate machine code for them, and execute the more-efficient machine-code version, rather than interpret the original.

For Java programs, there is no need to use the Collector API functions; the Analyzer signifies the existence of Java HotSpot-compiled code in the annotated disassembly listing using a special line underneath the index line for the method, as shown in the following example.

The disassembly listing only shows the interpreted byte code, not the compiled instructions. By default, the metrics for the compiled code are shown next to the special line. The exclusive and inclusive CPU times are different than the sum of all the inclusive and exclusive CPU times

shown for each line of interpreted byte code. In general, if the method is called on several occasions, the CPU times for the compiled instructions are greater than the sum of the CPU times for the interpreted byte code, because the interpreted code is executed only once when the method is initially called, whereas the compiled code is executed thereafter.

The annotated source does not show Java HotSpot-compiled functions. Instead, it displays a special index line to indicate instructions without line numbers. For example, the annotated source corresponding to the disassembly extract shown above is as follows:

Java Native Functions

Native code is compiled code originally written in C, C++, or Fortran, called via the Java Native Interface (JNI) by Java code. The following example is taken from the annotated disassembly of file jsynprog. java associated with demo program jsynprog.

```
5. class jsynprog
                        <Function: jsynprog.<init>()>
         5.504
0.
                        jsynprog.JavaCC() <Java native method>
0.
         1.431
                        jsynprog.JavaCJava(int) <Java native method>
0.
         5.684
                        jsynprog.JavaJavaC(int) <Java native method>
0.
         0.
                        [ 5] 00000000: aload 0
0.
         0.
                         5  500000001: invokespecial <init>()
0.
         0.
                        [ 5] 00000004: return
```

Because the native methods are not included in the Java source, the beginning of the annotated source for j synprog. java shows each Java native method using a special index line to indicate instructions without line numbers.

Note – The index lines do not wrap in the real annotated source display.

Cloned Functions

The compilers have the ability to recognize calls to a function for which extra optimization can be performed. An example of such is a call to a function where some of the arguments passed are constants. When the compiler identifies particular calls that it can optimize, it creates a copy of the function, which is called a clone, and generates optimized code.

In the annotated source, compiler commentary indicates if a cloned function has been created:

```
    Function foo from source file clone.c cloned, creating cloned function _$c1A.foo; constant parameters propagated to clone
    0. 0.570 27. foo(100, 50, a, a+50, b);
```

Note – Compiler commentary lines do not wrap in the real annotated source display.

The clone function name is a mangled name that identifies the particular call. In the above example, the compiler commentary indicates that the name of the cloned function is \$c1A. foo. This function can be seen in the function list as follows:

```
0.350 0.550 foo
0.340 0.570 $c1A.foo
```

Each cloned function has a different set of instructions, so the annotated disassembly listing shows the cloned functions separately. They are not associated with any source file, and therefore the instructions are not associated with any source line numbers. The following shows the first few lines of the annotated disassembly for a cloned function.

```
0.
         0.
                      <Function: $c1A.foo>
0.
                      [?]
                              10e98: save
                                                   %sp, -120, %sp
0.
                                                  %hi(0x10c00), %i4
                      [?]
                              10e9c: sethi
Ø
                      [?]
                              10ea0: mov
                                                  100, %i3
0.
         0.
                      [?]
                                                  %i3, [%i0]
                              10ea4: st
Ø
         Ø
                      [?]
                              10ea8: ldd
                                                   [%i4 + 640], %f8
```

Static Functions

Static functions are often used within libraries, so that the name used internally in a library does not conflict with a name that the user might use. When libraries are stripped, the names of static functions are deleted from the symbol table. In such cases, the Analyzer generates an artificial name for each text region in the library containing stripped static functions. The name is of the form <static>@0x12345, where the string following the @ sign is the offset of the text region within the library. The Analyzer cannot distinguish between contiguous stripped static

functions and a single such function, so two or more such functions can appear with their metrics coalesced. Examples of static functions can be found in the functions list of the jsynprog demo, reproduced below.

In the PCs tab, the above functions are represented with an offset, as follows:

An alternative representation in the PCs tab of functions called within a stripped library is:

```
library.so> -- no functions found + 0x0000F870
```

Inclusive Metrics

In the annotated disassembly, special lines exist to tag the time taken by outline functions.

The following shows an example of the annotated disassembly displayed when an outline function is called:

Branch Target

Viewing Source/Disassembly Without An Experiment

You can view annotated source code and annotated disassembly code using the er_src utility, without running an experiment. The display is generated in the same way as in the Analyzer, except that it does not display any metrics. The syntax of the er_src command is

```
er_src [ -func | -{source,src} item tag | -disasm item tag |
-{cc,scc,dcc} com_spec | -outfile filename | -V ] object
```

object is the name of an executable, a shared object, or an object file (.o file).

item is the name of a function or of a source or object file used to build the executable or shared object. *item* can also be specified in the form *function'file*, in which case er_src displays the source or disassembly of the named function in the source context of the named file.

tag is an index used to determine which *item* is being referred to when multiple functions have the same name. It is required, but is ignored if not necessary to resolve the function.

The special item and tag, all -1, tells er_src to generate the annotated source or disassembly for all functions in the object.

Note – The output generated as a result of using all -1 on executables and shared objects may be very large.

The following sections describe the options accepted by the er src utility.

-func

List all the functions from the given object.

-{source, src} item tag

Show the annotated source for the listed item.

-disasmitem tag

Include the disassembly in the listing. The default listing does not include the disassembly. If there is no source available, a listing of the disassembly without compiler commentary is produced.

-{c,scc,dcc} com-spec

Specify which classes of compiler commentary classes to show. *com-spec* is a list of classes separated by colons. The *com-spec* is applied to source compiler commentary if the -scc option is used, to disassembly commentary if the -dcc option is used, or to both source and disassembly commentary if -c is used. See "Commands That Control the Source and Disassembly Listings" on page 113 for a description of these classes.

The commentary classes can be specified in a defaults file. The system wide er.rc defaults file is read first, then an .er.rc file in the user's home directory, if present, then an .er.rc file in the current directory. Defaults from the .er.rc file in your home directory override the system defaults, and defaults from the .er.rc file in the current directory override both home and system defaults. These files are also used by the Analyzer and the er_print utility, but only the settings for source and disassembly compiler commentary are used by the er_src utility. See "Commands That Set Defaults" on page 129 for a description of the defaults files. Commands in a defaults file other than scc and dcc are ignored by the er_src utility.

-outfile *filename*

Open the file *filename* for output of the listing. By default, or if the filename is a dash (-), output is written to stdout.

-V

Print the current release version.



Manipulating Experiments

This chapter describes the utilities which are available for use with the Collector and Performance Analyzer.

This chapter covers the following topics:

- "Manipulating Experiments" on page 197
- "Other Utilities" on page 198

Manipulating Experiments

Experiments are stored in a directory that is created by the Collector. To manipulate experiments, you can use the usual UNIX® commands cp, mv and rm and apply them to the directory. You cannot do so for experiments from releases earlier than Forte Developer 7 (SunTM ONE Studio 7, Enterprise Edition for Solaris). Three utilities which behave like the UNIX commands have been provided to copy, move and delete experiments. These utilities are er_cp(1), er_mv(1) and er_rm(1), and are described below.

The data in the experiment includes archive files for each of the load objects used by your program. These archive files contain the absolute path of the load object and the date on which it was last modified. This information is not changed when you move or copy an experiment.

Copying Experiments With the er_cp Utility

Two forms of the er cp command exist:

er_cp [-V] experiment1 experiment2
er_cp [-V] experiment-list directory

The first form of the er_cp command copies *experiment1* to *experiment2*. If *experiment2* exists, er_cp exits with an error message. The second form copies a blank-separated list of experiments to a directory. If the directory already contains an experiment with the same name

as one of the experiments being copied the er_mv utility exits with an error message. The -V option prints the version of the er_cv utility. This command does not copy experiments created with software releases earlier than the Forte Developer 7 release.

Moving Experiments With the er mv Utility

Two forms of the er mv command exist:

```
er_mv [-V] experiment1 experiment2
er_mv [-V] experiment-list directory
```

The first form of the er_mv command moves *experiment1* to *experiment2*. If *experiment2* exists the er_mv utility exits with an error message. The second form moves a blank-separated list of experiments to a directory. If the directory already contains an experiment with the same name as one of the experiments being moved, the er_mv utility exits with an error message. The -V option prints the version of the er_mv utility. This command does not move experiments created with software releases earlier than the Forte Developer 7 release.

Deleting Experiments With the er_rm Utility

Removes a list of experiments or experiment groups. When experiment groups are removed, each experiment in the group is removed then the group file is removed.

The syntax of the er rm command is as follows:

```
er_rm [-f] [-V] experiment-list
```

The -f option suppresses error messages and ensures successful completion, whether or not the experiments are found. The -V option prints the version of the er_rm utility. This command removes experiments created with software releases earlier than the Forte Developer 7 release.

Other Utilities

Some other utilities should not need to be used in normal circumstances. They are documented here for completeness, with a description of the circumstances in which it might be necessary to use them.

The er_archive Utility

The syntax of the er_archive command is as follows.

```
er_archive [-nqAF] experiment
er_archive -V
```

The er_archive utility is automatically run when an experiment completes normally, or when the Performance Analyzer or er_print utility is started on an experiment. It reads the list of shared objects referenced in the experiment, and constructs an archive file for each. Each output file is named with a suffix of .archive, and contains function and module mappings for the shared object.

If the target program terminates abnormally, the er_archive utility might not be run by the Collector. If you want to examine the experiment from an abnormally-terminated run on a different machine from the one on which it was recorded, you must run the er_archive utility on the experiment, on the machine on which the data was recorded. To ensure that the load objects are available on the machine to which the experiment is copied, use the -A option.

An archive file is generated for all shared objects referred to in the experiment. These archives contain the addresses, sizes and names of each object file and each function in the load object, as well as the absolute path of the load object and a time stamp for its last modification.

If the shared object cannot be found when the er_archive utility is run, or if it has a time stamp differing from that recorded in the experiment, or if the er_archive utility is run on a different machine from that on which the experiment was recorded, the archive file contains a warning. Warnings are also written to stderr whenever the er_archive utility is run manually (without the -q flag).

The following sections describe the options accepted by the er_archive utility.

- n

Archive the named experiment only, not any of its descendants.

-q

Do not write any warnings to stderr. Warnings are incorporated into the archive file, and shown in the Performance Analyzer or output from the er_print utility.

—A

Request writing of all load objects into the experiment. This argument can be used to generate experiments that are more readily copied to a machine other than the one on which the experiment was recorded.

-F

Force writing or rewriting of archive files. This argument can be used to run er_archive by hand, to rewrite files that had warnings.

-V

Write version number information for the er_archive utility and exit.

The er_export Utility

The syntax of the er_export command is as follows.

er_export [-V] experiment

The er_export utility converts the raw data in an experiment into ASCII text. The format and the content of the file are subject to change, and should not be relied on for any use. This utility is intended to be used only when the Performance Analyzer cannot read an experiment; the output allows the tool developers to understand the raw data and analyze the failure. The–V option prints version number information.

Index

Numbers and Symbols @plt function, 148 <scalars> data object descriptor, 174 <total> data object descriptor, 174 <total> function comparing times with execution statistics, 144 described, 171 <unknown> function callers and callees, 170 mapping of PC to, 170</unknown></total></total></scalars>	appending path to files, 116 archiving load objects in experiments, 63,70 artificial functions, in User mode call stacks, 156 asynchronous I/O library, interaction with data collection, 43 attaching the Collector to a running process, 72 attributed metrics defined, 34 effect of recursion on, 38 illustrated, 36 use of, 35
addpath command, 116 address spaces, text and data regions, 164 aggressive backtracking, 88 aliased functions, 165 alternate entry points in Fortran functions, 167 alternate source context, 114 Analyzer, See Performance Analyzer analyzer command	B backtracking, 27 body functions, compiler-generated displayed by the Performance Analyzer, 168, 189 names, 189 branch target, 194
font size (-f) option, 81 help (-h) option, 81 JVM options (-J) option, 80 JVM path (-j) option, 80 verbose (-v) option, 81 version (-V) option, 81 annotated disassembly code, See disassembly code, annotated annotated source code, See source code, annotated API, Collector, 44	C compiler option, xhwcprof, 88 call stack, 88 default alignment and depth in the Timeline tab, 131 defined, 147 effect of tail-call optimization on, 150 in the Event tab, 91 in Timeline tab, 88 incomplete unwind, 164

call stack (Continued)	collect command (Continued)
mapping addresses to program structure, 164	miscellaneous options, 64-65
unwinding, 147	MPI tracing (-m) option, 58
callers-callees metrics	output options, 63-64
attributed, defined, 34	pause and resume data recording (-y) option, 62-63
displaying list of in er_print utility, 126	periodic sampling (-S) option, 58
printing for a single function in er_print	readme display (-R) option, 64
utility, 112	record count data (-c) option, 58-59
printing in er_print utility,110-111	record sample point (-1) option, 61-62
selecting in er_print utility,111	stop target after exec (-x) option, 62
sort order in er_print utility,112	synchronization wait tracing (-s) option, 57-58
Callers-Callees tab, 84, 95	syntax, 55
clock-based profiling	collect command, time range for data collection (-t)
accuracy of metrics, 144	option, 62
collecting data in dbx, 66	collect command
collecting data with the collect command, 56	verbose (-v) option, 65
comparison with gethrtime and gethrvtime, 143	version (-V) option, 64
data in profile packet, 141	with ppgsz command, 78
default metrics, 84	Collect Experiment, Preview command, 97
defined, 25	Collector
distortion due to overheads, 143	API, using in your program, 44, 45
interval	attaching to a running process, 72
See profiling interval	defined, 20, 24
metrics, 25, 141	disabling in dbx, 70
cloned functions, 167, 193	enabling in dbx, 70
collect command	running in dbx, 66
archiving (-A) option, 63	running with the collect command, 55
clock-based profiling (-p) option, 56	collectorAPI.h, 45
collecting data with, 55	as part of C and C++ interface to collector, 44
data collection options, 55, 80	common subexpression elimination, 180
data limit (-L) option, 64	compiler commentary, 86
data race detection (-r) option, 59	classes defined, 114-115
deadlock detection (-r) option, 59	cloned functions, 193
dry run (-n) option, 64	common subexpression elimination, 180
experiment control options, 59-63	description of, 180
experiment directory (-d) option, 63	filtering in er_src utility, 196
experiment group (-g) option, 63	filtering types displayed, 180
experiment name (-o) option, 64	inlined functions, 182
follow descendant processes (-F) option, 59-61	loop optimizations, 181
hardware counter overflow profiling (-h)	parallelizaton, 182
option, 56-57	selecting for annotated disassembly listing in
heap tracing (-H) option, 58	er_print utility,115
Java version (-j) option, 61	selecting for annotated source and disassembly
listing the options of 55	listing in er print utility, 116

compiler commentary (Continued)	data collection (Continued)
selecting for annotated source listing in er_print	resuming for collect command, 62
utility, 114	resuming from your program, 47
compiler-generated body functions	resuming in dbx, 70
displayed by the Performance Analyzer, 168, 189	segmentation faults, 41
names, 189	using dbx, 66
compiler optimization	using the collect command, 55
inlining, 182	data-derived metrics
parallelization, 182	displaying list of in er_print utility, 126
compiling	setting in the er_print utility, 117-118
affects of optimization on program analysis, 40	data_layout command, 117
debug symbol information format, 40	data objects
effect of static linking on data collection, 40	<scalars> descriptors, 174</scalars>
for Lines analyses, 39	<total>descriptor, 174</total>
Java programming language, 40	defined, 173
linking for data collection, 40	descriptors, 173
source code for annotated Source and	in hardware counter overflow experiments, 117
Disassembly, 39	layout, 89
static linking of libraries, 40	scope, 173
copying an experiment, 197	set the sort metric for, 118
correlation, effect on metrics, 142	data objects command, 117
CPU filtering, 96	data presentation
CPUs	•
listing selected, in er_print utility, 122	saving settings, 94
selecting in er_print utility, 124	setting options, 92
	data_single command, 117
	data_sort command, 118
	data types, 24
D	clock-based profiling, 25
data collection	default, in the Timeline tab, 131
controlling from your program, 44	hardware counter overflow profiling, 26
disabling from your program, 47	heap tracing, 30
disabling in dbx, 70	MPI tracing, 31
dynamic memory allocation effects, 41	synchronization wait tracing, 29
enabling in dbx, 70	DataLayout tab, 89
from MPI programs, 74	DataObjects tab, 88
linking for, 40	dataraces
MPI program, using dbx, 77	detailed information, 121
MPI program, using the collect command, 76	listing, 121
pausing for collect command, 62	dataspace profiling, data objects, 173
pausing from your program, 46	dbx
pausing in dbx, 70	collecting data under MPI, 77
preparing your program for, 41	running the Collector in, 66
program control of, 44	dbx collector subcommands
rate of, 54	archive, 70-71

dbx collector subcommands (Continued)	disassembly code, annotated (Continued)
dbxsample, 69	HotSpot-compiled instructions, 191
disable, 70	inclusive metrics, 194
enable, 70	instruction issue dependencies, 186
enable_once (obsolete), 72	interpreting, 186
hwprofile, 67-68	Java native methods, 192
limit, 71	location of executable, 53
pause, 70	metric formats, 184
profile, 66-67	printing in er_print utility,114
quit (obsolete), 72	setting preferences in er_print utility, 115-116
resume, 70	setting the highlighting threshold in er_print
sample, 69	utility, 116
sample record, 70	viewing with er_src utility,195
show, 71	Disassembly tab, 86
status, 72	disk space, estimating for experiments, 53
store, 71	documentation, accessing, 15-16
store filename (obsolete), 72	documentation index, 15
synctrace, 68,69	DTrace driver
tha, 69	described, 99
ddetail command, 121	setting up access to, 99
Deadlock Detail tab, 92	Dual-Source tab, 85
deadlocks	dynamically compiled functions
detailed information, 121	Collector API for, 47
listing, 121	definition, 169, 190
deadlocks command, 121	
Deadlocks tab, 83	
default metrics, 84	E
defaults, setting in a defaults file, 129	-
descendant experiments	entry points, alternate, in Fortran functions, 167
loading, 79	environment variables
setting mode for reading, in er_print utility, 130	JAVA_PATH, 51
descendant processes	JDK_HOME, 51
collecting data for all followed, 59	LD_LIBRARY_PATH, 73 LD_PRELOAD, 73
collecting data for selected, 72	PATH, 51
experiment location, 52	er_archive utility, 199
experiment names, 52	er cp utility, 197
followed by Collector, 50	er_export utility, 200
limitations on data collection for, 50	er_kernel utility, 99
disassembly code, annotated	er_mv utility, 198
branch target, 194	er_print commands
cloned functions, 193	addpath, 116
description, 184	allocs, 113
for cloned functions, 167, 193	appendtfile, 127
hardware counter metric attribution, 188	callers-callees, 110-111

er_print commands (Continued)	<pre>er_print commands (Continued)</pre>
cc, 116	object_list, 124-125
<pre>cmetric_list, 126</pre>	object_select, 125
cmetrics, 111	objects, 128
cpu_list, 122	outfile, 126
cpu_select, 124	overview, 128
csingle, 112	pathmap, 117
csort, 112	pcs, 113
data_layout, 117	procstats, 132
data_metric_list, 126	psummary, 113
data_metrics, 117-118	quit, 132
data_objects, 117	races, 121
data_single, 117	rdetail, 121
data_sort, 118	rtabs, 131
dcc, 115-116	sample list, 122
ddetail, 121	sample select, 124
deadlocks, 121	scc, 114-115
disasm, 114	script, 132
dmetrics, 129-130	setpath, 116
dsort, 130	sort, 109-110
en_desc, 130	source, 113-114
exp_list, 121-122	statistics, 129
fsingle, 110	sthresh, 115,116
fsummary, 110	tabs, 130
functions, 108	thread list, 122
header, 128	thread_tist, 122 thread select, 124
help, 132	tldata, 131-132
ifreq, 128	tlmode, 131
indx_metric_list, 126	version, 132
indxobj, 119	viewmode, 127
indxobj_define, 120	er print utility
indxobj_list, 120	command-line options, 104
indxobj_metrics, 120	commands
indxobj_sort, 120	_
leaks, 112	See er_print commands
limit, 127	metric keywords, 106
lines, 113	metric lists, 105
lsummary, 113	purpose, 103
lwp_list, 122	syntax, 104
lwp_select, 124	.er.rc file, 81, 84, 95, 98, 196
mapfile, 132	er_rm utility, 198
metric_list, 125	er_src utility, 195
metrics, 108-109	event marker, 88
name, 127	Event tab, 88, 91

events	experiments (Continued)
default display type in the Timeline tab, 131	groups, 52
displayed in Timeline tab, 87	header information in er_print utility, 128
exclusive metrics	limiting the size of, 64,71
defined, 34	listing in er_print utility, 121-122
for PLT instructions, 148	location, 51
how computed, 147	moving, 53, 198
illustrated, 36	moving MPI, 76
use of, 34	MPI storage issues, 75
execution statistics	multiple, 79
comparison of times with the function, 144	naming, 52
printing in er_print utility, 129	opening, 79
experiment directory	preview, 80
default, 51	remapping path prefixes, 117
specifying in dbx, 71	removing, 198
specifying with collect command, 63	setting mode for Java and OpenMP, 127
experiment filtering, 96	setting path to find files, 116
experiment groups, 51	storage requirements, estimating, 53
adding, 80	terminating from your program, 47
creating, 79	where stored, 63,71
default name, 52	experiments, descendant, setting mode for reading, in
defined, 52	er_print utility,130
multiple, 79	Experiments tab, 90
name restrictions, 52	explicit multithreading, 150
preview, 80	
removing, 198	
specifying name in dbx, 71	_
specifying name with collect command, 63	F
experiment names, 51	fast traps, 149
default, 52	filter CPU, 96
MPI, using MPI_comm_rank and a script, 77	Filter Data dialog box, 96
MPI default, 52,75	filter experiment, 96
restrictions, 52	filter LWPs, 96
specifying in dbx, 71	filter sample, 96
experiments	filter threads, 96
See also experiment directory	Find tool, 95
adding, 80	Formats tab, 93
appending current path, 116	Fortran
archiving load objects in, 63, 70	alternate entry points, 167
copying, 197	Collector API, 44
	subroutines, 165
data aggregation, 80 default name, 52	frames, stack, See stack frames
defined, 51	function calls
-	between shared objects, 148
descendant, loading, 79	in single-threaded programs,147

function calls (Continued)	Н
recursive, metric assignment to, 37	hardware counter, defined, 26
function list	hardware counter attribute options, 57
compiler-generated body function, 190	hardware counter library, libcpc.so, 50
printing in er_print utility,108	hardware counter list
sort order, specifying in er_print utility, 109	description of fields, 27
function-list metrics	obtaining with collect command, 55
displaying list of in er_print utility, 125	obtaining with dbx collector command, 67
selecting default in .er.rc file, 129-130	raw counters, 29
selecting in er_print utility, 108-109	well-known counters, 27
setting default sort order in .er.rc file, 130	hardware counter metrics, displayed in DataObjects
function names, C++, choosing long or short form in	tab, 88
er_print utility,127	hardware counter overflow profiling
function PCs, aggregation, 86, 87, 95	collecting data with collect command, 56
function reordering, 97	collecting data with dbx, 67
functions	data in profile packet, 144
@plt, 148	default metrics, 84
<total>, 171</total>	defined, 26
<unknown>, 170</unknown>	hardware counter overflow value
address within a load object, 165	consequences of too small or too large, 145
aliased, 165	defined, 26
alternate entry points (Fortran), 167	experiment size, effect on, 54
cloned, 167, 193	setting in dbx, 67
Collector API, 44, 47	setting with collect, 57
definition of, 165	hardware counters
dynamically compiled, 47, 169, 190	choosing with collect command, 56
global, 165	choosing with dbx collector command, 67
inlined, 167	counter names, 56
MPI, traced, 31	data objects and metrics, 117
non-unique, names of, 166	list described, 27
outline, 169, 188	obtaining a list of, 55, 67
static, in stripped shared libraries, 166, 193	overflow value, 26
static, with duplicate names, 166	heap tracing
system library, interposition by Collector, 42	collecting data in dbx, 68
variation in addresses of, 165	collecting data with collect command, 58
wrapper, 166	default metrics, 84
Functions tab, 83,95	metrics, 30
	preloading the Collector library, 73
	high metric values
G	in annotated disassembly code, 116
gprof utility, 22	in annotated source code, 115
gpior aunity, 22	

1	interposition by Collector on system library
inclusive metrics	functions, 42
defined, 34	interval, profiling, See profiling interval
effect of recursion on, 38	interval, sampling, See sampling interval
for outlined functions, 194	
for PLT instructions, 148	
how computed, 147	
illustrated, 36	J
use of, 34	Java
index lines, 178	dynamically compiled methods, 47, 169
in Disassembly tab, 87, 185	monitors, 29
in er_print utility,114	profiling limitations, 50
in Source tab, 86, 178, 185	setting er_print display output for, 127
index lines, special	JAVA_PATH environment variable, 51
compiler-generated body functions, 190	Java Virtual Machine path, analyzer command
HotSpot-compiled instructions, 191	option, 80
instructions without line numbers, 191	JDK_HOME environment variable, 51
Java native methods, 192	jdkhome analyzer command option, 80
outline functions, 188	
index-object metrics, displaying list of in er_print	
utility, 126	K
index objects, 119	kernel clock profiling, 100
defining, 120	kernel experiment
listing, 120	field label meanings, 102
metrics, 120	types of data, 99
sorting, 120	kernel profile, analyzing, 102
Index Tabs, 90	kernel profiling
indxobj command, 119	profiling a specific process or kernel
indxobj_define command, 120	thread, 101-102
indxobj_list command, 120	setting up your system for, 99
indxobj_metrics command, 120	keywords, metric, er_print utility, 106
indxobj_sort command, 120	, <u>_</u> r,,
inlined functions, 167	
input file	
terminating in er_print utility, 132	L
to er_print utility, 132	LD_LIBRARY_PATH environment variable, 73
Inst-Freq tab, 89	LD_PRELOAD environment variable, 73
instruction frequency, printing list in er_print	leaf PC, defined, 147
utility, 128	Leak tab, 91
instruction issue	LeakList tab, 88
delay, 187	leaks, memory, definition, 31
grouping, effect on annotated disassembly, 186	Legend tab, 88
intermediate files, use for annotated source listings, 164	libaio.so, interaction with data collection, 43 libcollector.h, 44

libcollector.h (Continued)	M
as part of Java programming language interface to	mapfile
collector, 45	generating, 97
libcollector.so shared library	generating with er_print utility, 132
preloading, 73	memory allocations, 30
using in your program, 44	and leaks, 88
libcpc.so, use of, 50	effects on data collection, 41
libfcollector.h, 45	memory leaks, definition, 31
libraries	memory object, defined, 118
collectorAPI.h, 45	MemoryObjects Tabs, 91
interposition on, 42	methods, See functions
libaio.so, 43	metrics
libcollector.so, 43,44,73	attributed, 84
libcpc.so, 42,50	See attributed metrics
libthread.so, 42	clock-based profiling, 25, 141
MPI, 42,74	default, 84
static linking, 40	defined, 23
stripped shared, and static functions, 166, 193	effect of correlation, 142
system, 42	exclusive
limitations	See exclusive metrics
descendant process data collection, 50	function-list
experiment group names, 52	See function-list metrics
experiment name, 52	hardware counter, attributing to instructions, 188
Java profiling, 50	heap tracing, 30
profiling interval value, 49	inclusive
limiting output in er_print utility, 127	See inclusive metrics
limiting the experiment size, 64, 71	inclusive and exclusive, 83,84
Lines tab, 86,95	interpreting for instructions, 186
load objects	interpreting for source lines, 184
addresses of functions, 165	memory allocation, 30
contents of, 165	MPI tracing, 31 synchronization wait tracing, 29
defined, 165	threshold, 87
listing selected, in er print utility, 124-125	threshold, setting, 86
printing list in er_print utility, 128	time precision, 84
selecting in er print utility, 125	timing, 25
symbol tables, 165	Metrics tab, 92
writing layouts of, 117	microstates, 91
loop optimizations, 181	contribution to metrics, 141
LWPs	switching, 149
creation by Solaris threads, 150	moving an experiment, 53, 198
filtering, 96	MPI experiments
listing selected, in er_print utility, 122	default name, 52
selecting in er print utility, 124	moving, 76

MPI experiments (Continued)	outline functions, 169, 188
storage issues, 75	output file
MPI programs	closing, in er_print utility, 126
attaching to, 74	closing and opening new, in er_print utility, 127
collecting data from, 74	overflow value, hardware counter, See hardware
collecting data with collect command, 76	counter overflow value
collecting data with dbx, 77	overview data, printing in er print utility, 128
experiment names, 52,75	
experiment storage issues, 75	
MPI tracing	
collecting data in dbx, 69	P
collecting data with collect command, 58	parallel execution, directives, 182
data in profile packet, 146	PATH environment variable, 51
functions traced, 31	path prefix mapping, 94
interpretation of metrics, 146	path to files, 116
metrics, 31	pathmap command,117
preloading the Collector library, 73	Pathmaps tab, 94
multithreaded applications, attaching the Collector	pausing data collection
to, 72	for collect command, 62
multithreading, explicit, 150	from your program, 46
<i>O</i> 1 ,	in dbx, 70
	PCs
	defined, 147
N	from PLT, 148
naming an experiment, 52	ordered list in er_print utility, 113
networked disks, 51	PCs tab, 87, 95
NFS, 51	Performance Analyzer
non-unique function names, 166	Callers-Callees tab, 84, 95
•	command-line options, 80
	DataLayout tab, 89
	DataObjects tab, 88
0	Deadlock Detail tab, 92
OpenMP	Deadlocks tab, 83
metrics, 161	defaults, 98
overview of execution, 154-163	defined, 20
profiling data, machine representation, 161-163	definition, 79
setting er_print display output for, 127	Disassembly tab, 86
User mode call stacks, 156	Dual-Source tab, 85
user mode display of profile data, 155-161	Event tab, 88, 91
OpenMP parallelization, 182	Experiments tab, 90
optimizations	File menu, 82
common subexpression elimination, 180	Filter Data dialog box, 96
program analysis affect of, 40	Find tool, 95
tail-call, 149	Formats tab, 93
options, command-line, er_print utility, 104	Functions tab, 83, 95

Performance Analyzer (Continued)	profiling interval
Help menu, 82	defined, 25
Index tabs, 90	experiment size, effect on, 54
Inst-Freq tab, 89	limitations on value, 49
Leak tab, 91	setting with dbx collector command, 66
LeakList tab, 88	setting with the collect command, 56,67
Legend tab, 88	program counter (PC), defined, 147
Lines tab, 86, 95	program execution
MemoryObjects tabs, 91	call stacks described, 147
Metrics tab, 92	explicit multithreading, 150
Pathmaps tab, 94	shared objects and function calls, 148
PCs tab, 87, 95	signal handling, 148
Race Detail tab, 92	single-threaded, 147
Races tab, 83	tail-call optimization,149
recording an experiment, 80	traps, 149
Search Path tab, 94	Program Linkage Table (PLT), 148
Show/Hide Functions, 95	program structure, mapping call stack addresses
Sort tab, 92	to, 164
Source/Disassembly tab, 93	
Source tab, 85	
starting, 79	R
Statistics tab, 90	
Summary tab, 87, 91	Race Detail tab, 92
tabs to be shown, 92	races command, 121
Timeline menu, 82	Races tab, 83
Timeline tab, 87, 91, 93	raw hardware counters, 27, 29
View menu, 82	rdetail command, 121
performance data, conversion into metrics, 23	recursive function calls, metric assignment to, 37
performance metrics, See metrics	remapping path prefixes, 94, 117
PLT (Program Linkage Table), 148	removing an experiment or experiment group, 198 restrictions, <i>See</i> limitations
ppgsz command, 78	resuming data collection
preloading libcollector.so, 73	for collect command, 62
printing accumulated statistics from er_print	from your program, 47
utility, 132	in dbx, 70
printing the current path, 116	mudx, 70
process address-space text and data regions, 164	
prof utility, 22	
profile packet	S
clock-based data, 141	sample filtering, 96
hardware counter overflow data, 144	sample points, displayed in Timeline tab, 87
MPI tracing data, 146	samples
size of, 53	circumstances of recording, 32
synchronization wait tracing data, 144	defined, 33
profiling, defined, 24	information contained in packet, 32

samples (Continued)	source and disassembly code, annotated, setting
interval	preferences in er_print utility, 116
See sampling interval	source code, annotated
listing selected, in er_print utility, 122	cloned functions, 193
manual recording in dbx, 70	compiler commentary, 180
manual recording with collect, 61	compiler-generated body functions, 190
periodic recording in dbx, 69	description, 177, 183
periodic recording with collect command, 58	discerning annotations from source, 178
recording from your program, 46	for cloned functions, 167
recording when dbx stops a process, 69	index lines, 178
selecting in er_print utility, 124	instructions without line numbers, 191
Sampling Collector, See Collector	interpreting, 184
sampling interval	location of source files, 53
defined, 32	metric formats, 184
setting in dbx, 69	outline functions, 188
setting with the collect command, 58	printing in er_print utility, 113
Search Path tab, 94	setting compiler commentary classes in er_print
searching for source and object files, 94	utility, 114
segmentation faults during data collection, 41	setting the highlighting threshold in er_print
Select Tabs dialog box, 89, 94	utility, 115
setpath command, 116	use of intermediate files, 164
setting mode for reading descendant experiments in	viewing in Performance Analyzer, 177
er_print utility, 130	viewing with er_src utility, 195
setuid, use of, 43	source code, compiler commentary, 86
shared objects, function calls between, 148	Source/Disassembly tab, 93
Show/Hide Functions dialog box, 95	source lines, ordered list in er_print utility, 113
signal handlers	Source tab, 85 stack frames
installed by Collector, 43, 148	
user program, 43	defined, 148
signals	from trap handler, 149 reuse of in tail-call optimization, 149
calls to handlers, 148	static functions
profiling, 43	duplicate names, 166
profiling, passing from dbx to collect	in stripped shared libraries, 166, 193
command, 62	static linking, effect on data collection, 40
use for manual sampling with collect	Statistics tab, 90
command, 61	storage requirements, estimating for experiments, 53
use for pause and resume with collect	subroutines, See functions
command, 62	summary metrics
single-threaded program execution, 147	for a single function, printing in er_print
sort order	utility, 110
callers-callees metrics, in er_print utility, 112	for all functions, printing in er_print utility, 110
function list, specifying in er_print utility, 109	Summary tab, 87,91
Sort tab, 92	symbol tables, load-object, 165

synchronization delay events	threshold, highlighting (Continued)
data in profile packet, 144	in annotated source code, er_print utility, 115
defined, 29	threshold, synchronization wait tracing
metric defined, 30	calibration, 29
synchronization delay tracing, default metrics, 84	defined, 29
synchronization wait time	effect on collection overhead, 144
defined, 29, 144	setting with dbx collector, 68
metric, defined, 30	setting with the collect command, 58,68
synchronization wait tracing	time metrics, precision, 84
collecting data in dbx, 68	Timeline menu, 82
collecting data with collect command, 57	Timeline tab, 87, 91, 93
data in profile packet, 144	TLB (translation lookaside buffer) misses, 149, 188
defined, 29	traps, 149
metrics, 29	1
preloading the Collector library, 73	
threshold	
See threshold, synchronization wait tracing	U
wait time, 29, 144	unwinding the call stack, 147
syntax	User mode call stacks in OpenMP applications, 156
er_archive utility, 199	* **
er_export utility, 200	
er_print utility,104	
er_src utility, 195	V
	version information
	for collect command, 64
	for er_cp utility,198
Т	for er_mv utility,198
tabs	for er_print utility, 132
selecting for display, 94	for er_rm utility,198
setting default visible set for Thread Analyzer, in	for er_src utility,196
er_print utility,131	view mode, explained, 93
setting default visible set of, in er_print utility, 130	viewmode command, 127
tail-call optimization, 149	
Thread Analyzer, setting default visible set, in er_print	
utility, 131	
thread filtering, 96	W
threads	wait time, See synchronization wait time
creation of, 150	well-known hardware counters, 27
library, 42	wrapper functions, 166
listing selected, in er_print utility, 122	
selecting in er_print utility, 124	
worker, 150	V
threshold, highlighting	X
in annotated disassembly code, er_print utility, 116	-xdebugformat, setting debug symbol information format, 40

xhwcprof C compiler option, 88