JD Edwards World

Upgrade Guide Release A9.3

E21963-05

May 2013



JD Edwards World Upgrade Guide, Release A9.3

E21963-05

Copyright © 2013, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT END USERS: Oracle programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

Contents

Pr	eface		. vii			
	Audier	Audience				
	Documentation Accessibility					
	Related	l Documents	vii			
	Conve	ventions				
1	Phase	One - Upgrade Process Overview (Release A9.3 Update)				
	1.1	Upgrade Methodology	1-3			
	1.1.1	Alternate Environment Set up				
	1.1.2	Disk Space Considerations	1-3			
	1.1.3	Duplicate Files Rule	1-3			
	1.1.4	Control File Dependencies	1-3			
	1.1.5	Monitor Changes to JD Edwards World Control Files	1-4			
	1.2	A9.3 Update 1	1-4			
	1.3	Pre-Upgrade Application and Technical Instructions	1-5			
	1.3.1	Sign on to Production Environment	1-5			
	1.3.2	Run Integrity Reports	1-5			
	1.3.3	Accounts Payable	1-5			
	1.3.4	Menu History File	1-5			
	1.3.5	Custom Menus	1-5			
	1.3.6	Contract Billing and Service Billing	1-5			
	1.3.7	Delete Vocabulary Override Record	1-5			
	1.3.8	Manufacturing - A7.3 Customers	1-5			
	1.3.9	Sales Orders and Purchase Orders - A7.3 and A8.1 Customers	1-6			
	1.3.10	EnterpriseOne (OneWorld) Files - A7.3 Customers	1-6			
	1.3.11	Database Audit Manager and Other Triggers	1-6			
2	Phase	Two - Planning and Upgrading the Alternate Environment				
	2.1	Overview	2-1			
	2.2	Set Up an Environment	2-1			
	2.3	Check for DDM Files	2-2			
	2.4	IBM Journaling	2-2			
	2.5	Payroll - A7.3 Customer	2-2			
	2.6	Delete Files	2-2			
	2.7	Create and Validate Upgrade Plan	2-2			

	2.7.1	Sign on as JDEINSTAL to Access the Software Upgrade Menu	2-3
	2.7.2	Create Upgrade Plan	
	2.7.3	Indicate the Libraries for this Plan	
	2.7.4	Indicate the Merge Information	
	2.7.5	Indicate the Printer Information	
	2.7.6	Select Advanced Options	
	2.7.7	Designate the Data Dictionary Field Ownership information	
	2.7.8	Validate Your Upgrade Plan	
	2.8	Start the Upgrade and Track Progress	
	2.8.1		2-11
	2.8.2		2-11
	2.8.3	10	2-12
	2.8.4	Inquire on File Conversion Status	
3	Phase	Three - Create New Files and Update Control Files	
•	3.1	Overview	3-1
	3.2	Change the QJDF Data Area in JDFOBJALT	3-1
	3.3	Sign On as the Security Administrator User ID you entered during the OUI Process	
	3.4	Activate Installed Systems	3-2
	3.5	Create New Files	3-3
	3.5.1	Build New Files List Report	3-3
	3.5.2	Create New Files	3-4
	3.6	Optional Files	
	3.7	Run the Menu Comparison Report	
	3.8	Print Menu, User Defined Code, and New Automatic Accounting Instruction (AAI) Reports 3-8	
	3.8.1	Update the Menu Files	3-9
	3.8.2	•	3-10
	3.8.3		3-11
	3.8.4	•	3-12
	3.8.5	•	3-12
	3.8.6	•	3-13
	3.8.7	•	3-14
	3.9	*	3-15
	3.10		3-17
	3.10.1	1 11 7	3-17
	3.10.2	*	3-18
	3.10.3		3-21
4	Phase	Four - Run Special Application Jobs	
	4.1	Sign On as the User ID you entered during the OUI process	4-1
	4.2	Access the Post Upgrade Menu	4-1
	4.3	Rebuild Menu Word Search	4-2
	4.4	Run Special Application Jobs	4-2
	4.5	Activate Triggers	4-4
	4.6	Rebuild DD/VO	4-4
	4.7	Only if You Use a Comma for the Decimal Character	4-5

5	Phase	Phase Five - Post Upgrade Tasks				
	5.1	Overview	5-1			
	5.2	Access the Post Upgrade Menu	5-1			
	5.3	Work with 'Z' Libraries	5-1			
	5.4	Sign on as JDEINSTAL to Access the Software Upgrade Menu	5-2			
	5.5	Print the Conversion Status Report	5-2			
	5.6	Review the Upgrade Reports	5-3			
	5.7	Sign off as JDEINSTAL	5-3			
	5.8	Sign On as the Security Administrator User ID You Entered During the OUI Process	5-3			
	5.9	End the JD Edwards World Monitor	5-3			
	5.10	Test in the Alternate Environment	5-3			
	5.11	Install A9.3 Update 1 to the Alternate Environment	5-4			
6	Phase Six - Upgrade the Production Environment					
	6.1	Overview	6-1			
	6.2	Pre-Upgrade Application and Technical Instructions for the A7.3, A8.1, A9.1, or A9.2 Production Environment 6-2				
	6.2.1	Payroll - A7.3 Customer	6-2			
	6.2.2	Run Integrity Reports	6-2			
	6.2.3	Accounts Payable	6-3			
	6.2.4	Contract Billing and Service Billing	6-3			
	6.2.5	Check for DDM Files	6-3			
	6.2.6	IBM Journaling	6-3			
	6.2.7	Database Audit Manager and Other Triggers	6-3			
	6.3	Delete Files	6-3			
	6.4	Sign on as JDEINSTAL to Access the Software Upgrade Menu	6-4			
	6.4.1	Set Up an Upgrade Plan for the Production Data Libraries	6-4			
	6.4.2	Stop JD Edwards World Subsystems	6-5			
	6.4.3	Sleeper (required)	6-5			
	6.4.4	Order Processing (If Installed)	6-6			
	6.4.5	Human Resources (If Installed)	6-6			
	6.4.6	Back Up Libraries	6-6			
	6.4.7	Be Sure Users are Not Accessing the Libraries You Want to Upgrade	6-6			
	6.5	Start the Upgrade and Track Progress	6-6			
	6.5.1	Start the Upgrade	6-6			
	6.5.2	Inquire on File Conversion Status	6-8			
	6.5.3	Change the QJDF Data Area in JDFOBJALT	6-8			
	6.6	Sign On as the Security Administrator User ID You Entered During the OUI Process	6-9			
	6.6.1	Create New Files	6-9			
	6.6.2	Update Your Applications	6-9			
	6.6.3	Run Special Application Jobs, and Perform Post Upgrade Tasks, Upgrade Reports. 6-11				
	6.6.4	Change the JDEPROD Library List	6-12			
	6.6.5		6-12			
	6.7	•	6-13			
	6.8		6-13			

	6.9	Rename the Alternate JDF Libraries	. 6-13		
	6.10	Sign On to the Production Environment6			
	6.11	Start JD Edwards World Subsystems			
	6.11.1	Order Processing (If Installed)	. 6-14		
	6.11.2	Human Resources (If Installed)	. 6-14		
	6.11.3	Start the JD Edwards World Sleeper Subsystem	. 6-14		
	6.12	End the JD Edwards World Monitor	. 6-14		
	6.13	Activate Triggers	. 6-14		
	6.14	Update the Library Entries in Software Versions Repository	. 6-15		
	6.15	User Profiles	. 6-15		
Α	Contro	ol File Dependencies			
	A.1	Control File Sets	A-1		
	A.1.1	User Security	A-1		
	A.1.2	DREAM Writer	A-1		
	A.1.3	Data Dictionary	A-2		
	A.1.4	Vocabulary Overrides/Function Keys	A-2		
	A.1.5	User Defined Codes	A-2		
	A.1.6	Software Versions Repository	A-3		
	A.1.7	Generic Message/Rates Files			
	A.1.8	Menu Files	A-3		
	A.1.9	Generic Text Files	A-3		
В	Upgra	de Planner Screens			
В	Upgra B.1		B-1		
В	. •	Plan the Upgrade ScreenLibraries for this Plan Screen			
В	B.1	Plan the Upgrade ScreenLibraries for this Plan Screen	B-2		
В	B.1 B.2	Plan the Upgrade ScreenLibraries for this Plan Screen	B-2 B-4		
В	B.1 B.2 B.3	Plan the Upgrade ScreenLibraries for this Plan Screen	B-2 B-4 B-8		
С	B.1 B.2 B.3 B.4 B.5	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen	B-2 B-4 B-8		
	B.1 B.2 B.3 B.4 B.5	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen onversions	B-2 B-4 B-8		
	B.1 B.2 B.3 B.4 B.5	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen onversions Scheduler Conversions	B-2 B-4 B-8 . B-10		
	B.1 B.2 B.3 B.4 B.5	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen onversions Scheduler Conversions Scheduler Types	B-2 B-4 B-8 . B-10		
	B.1 B.2 B.3 B.4 B.5 File C	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen Onversions Scheduler Conversions Scheduler Types Main Conversions	B-2 B-4 B-8 . B-10 C-1 C-1		
	B.1 B.2 B.3 B.4 B.5 File Co	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen Onversions Scheduler Conversions Scheduler Types Main Conversions JDEINSTAL Subsystem	B-2 B-4 B-8 . B-10 C-1 C-1 C-2 C-2		
	B.1 B.2 B.3 B.4 B.5 File C.1 C.1.1 C.2 C.3	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen Onversions Scheduler Conversions Scheduler Types Main Conversions JDEINSTAL Subsystem JDEINSTAL Job Queues	B-2 B-4 B-8 . B-10 C-1 C-1 C-2 C-2 C-3		
	B.1 B.2 B.3 B.4 B.5 File Control Contr	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen Onversions Scheduler Conversions Scheduler Types Main Conversions JDEINSTAL Subsystem	B-2 B-4 B-8 . B-10 C-1 C-1 C-2 C-2 C-3 C-3		
	B.1 B.2 B.3 B.4 B.5 File Constant Const	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen Onversions Scheduler Conversions Scheduler Types Main Conversions JDEINSTAL Subsystem JDEINSTAL Job Queues File Conversion Job Queues File Conversion Job Queues Disk Utilization - Work With Disk Status	B-2 B-4 B-8 . B-10 C-1 C-1 C-2 C-2 C-3 C-3 C-4		
	B.1 B.2 B.3 B.4 B.5 File C.1 C.1.1 C.2 C.3 C.4 C.5 C.6	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen Onversions Scheduler Conversions Scheduler Types Main Conversions JDEINSTAL Subsystem JDEINSTAL Job Queues File Conversion Job Queues	B-2 B-4 B-8 . B-10 C-1 C-1 C-2 C-2 C-3 C-3 C-4 C-5		
	B.1 B.2 B.3 B.4 B.5 File C.1 C.1.1 C.2 C.3 C.4 C.5 C.6 C.7 C.8	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen Scheduler Conversions Scheduler Types Main Conversions JDEINSTAL Subsystem JDEINSTAL Job Queues File Conversion Job Queues Disk Utilization - Work With Disk Status CPU Utilization - Work With System Status Summary	B-2 B-4 B-8 . B-10 C-1 C-1 C-2 C-2 C-3 C-3 C-4 C-5		
С	B.1 B.2 B.3 B.4 B.5 File C.1 C.1.1 C.2 C.3 C.4 C.5 C.6 C.7 C.8	Plan the Upgrade Screen Libraries for this Plan Screen Merge Information Screen Printer Information Screen Advanced Options Screen Scheduler Conversions Scheduler Types Main Conversions JDEINSTAL Subsystem JDEINSTAL Job Queues File Conversion Job Queues File Conversion Job Queues Disk Utilization - Work With Disk Status CPU Utilization - Work With System Status	B-2 B-4 B-8 . B-10 C-1 C-1 C-2 C-2 C-3 C-3 C-4 C-5		

Preface

Welcome to the JD Edwards World Upgrade Guide.

Audience

This guide is intended for implementers and end users of JD Edwards World releases A7.3, A8.1, A9.1, and A9.2.

Documentation Accessibility

For information about Oracle's commitment to accessibility, visit the Oracle Accessibility Program website at

http://www.oracle.com/pls/topic/lookup?ctx=acc&id=docacc.

Access to Oracle Support

Oracle customers have access to electronic support through My Oracle Support. For information, visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=info or visit http://www.oracle.com/pls/topic/lookup?ctx=acc&id=trs if you are hearing impaired.

Related Documents

You can access related documents from the JD Edwards World Release Documentation Overview pages on My Oracle Support. Access the main documentation overview page by searching for the document ID, which is 1362397.1, or by using this link:

https://support.oracle.com/CSP/main/article?cmd=show&type=NOT&id=1362397.
1

Conventions

The following text conventions are used in this document:

Convention	Meaning
boldface	Boldface type indicates graphical user interface elements associated with an action, or terms defined in text or the glossary.
italic	Italic type indicates book titles, emphasis, or placeholder variables for which you supply particular values.
monospace	Monospace type indicates commands within a paragraph, URLs, code in examples, text that appears on the screen, or text that you enter.

Phase One - Upgrade Process Overview (Release A9.3 Update)

This chapter contains these topics:

- Section 1.1, "Upgrade Methodology,"
- Section 1.2, "A9.3 Update 1,"
- Section 1.3, "Pre-Upgrade Application and Technical Instructions."

The following graphic is a high-level overview of the upgrade process:

Figure 1-1 Upgrade Process

Process Highlights Process Flow Phase 1 Overview Phase 2 Restore data libraries to alternate names (A97JDE) Planning the Upgrade screen Libraries for This Environment screen Upgrade Merge Information screen Planner Printer Information screen Screens Advanced Options screen Data Dictionary Field Ownership screen Upgrade Planner Validation Report Duplicate Files Found Report Validator Data Dictionary Field Ownership Report Change Message Break mode Start the Upgrade Start Upgrade Inquire on File Conversion status (A97JDE) Change QJDF Data Area Update Install History Activate Installed Systems Build new Files List Create new Files Print menu, Automatic Accounting Instruction (AAI), Phase 3 and User-Defined Code (UDC) Reports (G97R4) Update menus, AAIs, and UDCs Menu Comparison Report Data Dictionary Workbench Create ASI Report Work with instructions (ASIs) Review DREAM Writer Versions Workbench Rebuild menu word search Phase 4 Run special application status (G97R4) Rebuild DD/VO Display and delete 'Z' libraries Phase 5 Print the File Conversion Status Report (G97R4) Test the alternate environment

· Upgrade production environment

Phase 6

(G97R4)

1.1 Upgrade Methodology

JD Edwards World highly recommends that you always upgrade your software in an alternate (test) environment before you upgrade your production environment. This benefits you in the following ways:

- Allows users to test the upgraded JD Edwards World software with copies of your data files. When you are satisfied with the testing, you can then upgrade your production environment.
- Users can be trained in the alternate environment while continuing your daily processing in the production environment.
- Modified or custom programs can be updated and tested in the alternate environment to verify they work with the upgraded software.
- Timings from file conversions in the alternate environment will help you plan for upgrading the production environment.

The procedures in this publication guide you through upgrading an alternate environment and then using the alternate to upgrade your production environment.

1.1.1 Alternate Environment Set up

Note: Before setting up the Alternate Environment, make sure you have performed the instructions in the A9.3 Quick Installation Guide.

The only libraries that will exist in the alternate environment before you start the A9.3 upgrade are copies of your production libraries. This includes data, control, and security files. You should restore the libraries from a backup tape. Until the A9.3 upgrade is complete, you will not be able to sign into the alternate environment.

1.1.2 Disk Space Considerations

It is recommended that you have enough disk space to restore a copy of your data libraries, space for a full A9.3 set of software, which is 7 gigabytes and another 10% of your data libraries combined size. For A9.3, most conversions are done as in place conversions, thus extra space is not needed for an additional copy of the file as in upgrades prior to A9.1.

1.1.3 Duplicate Files Rule

The upgrade process does not allow duplicate files to exist in the customer data libraries defined in an upgrade plan (control, data, and security files). In preparation for the upgrade in the alternate environment, remove duplicate files from the appropriate library. The validation process of the upgrade identifies any remaining duplicate files and produces a report. Any duplicate files on the report need to be cleaned up before initiating the upgrade. Evaluate the number of records in each duplicate file and note that the system updates the first file in the library list before removing a duplicate file. The file that is going to be deleted must not contain any records needed for processing.

1.1.4 Control File Dependencies

To avoid problems when you use or upgrade JD Edwards World software, make sure specific sets of control files and their associated logical files are together in the same

library on your machine. For a list of the control files, see Section A, "Control File Dependencies."

1.1.5 Monitor Changes to JD Edwards World Control Files

You will need to apply manual changes to the JD Edwards World control files (for example, data dictionary, menus, DREAM Writer, and so on) as part of the upgrade process. If you can follow one of the three methods below, you will need to perform most of the changes only once. If not, you will need to apply all manual changes twice (to the alternate environment, and then to the production environment).

Dual Maintenance

Apply all changes made to the JD Edwards World production control files and the alternate environment. Synchronize the files in both places. For a list of control files, refer to the Control File Changes Monitored chart in Section 6.6.2, "Update Your Applications."

Note: If you use system 12 (Fixed Assets) or system 83 (FASTR) and plan to monitor the changes to DREAM Writer, you must use the dual maintenance method to monitor your changes and maintain your STAR and FASTR versions in both the production and alternate environments. When you upgrade your production environment in Phase Six, you need to copy these system files along with the DREAM Writer files. For more information, see the Note in the Section 6.6.2, "Update Your Applications."

Control Changes

Do not allow users to change JD Edwards World production control files between the time you create the alternate environment and the time you upgrade the production environment.

Track Changes

Make note of all changes made to JD Edwards World production control files after you create the alternate environment, and then apply the same changes to the alternate environment.

You can use Data Base Audit Manager to track changes made to control files. For more information, refer to the JD Edwards World Database Audit Manager Guide.

1.2 A9.3 Update 1

JD Edwards World recommends that you install A9.3 Update 1 followed by A9311 (Single Byte) or D9311 (Double Byte) to your alternate environment after the A9.3 upgrade is performed in that environment. A download is available, which contains new install libraries that allows you to upgrade the A7.3, A8.1, A9.1, or A9.2 productions libraries to A9.3 Update 1 plus A9311 or D9311.

Note: A9311 is the first Group Software Update for A9.3.1. You will install the Group Software Update that is generally available on the Update Center when you perform the A9.3 Upgrade.

1.3 Pre-Upgrade Application and Technical Instructions

1.3.1 Sign on to Production Environment

The instructions in this section should be performed in your production environment. In the next Phase, you will back up and restore the data libraries from your production environment to set up your A9.3 alternate (test) environment.

Note: As of A9.3, J98INIT as the Initial Program on the IBM profile is obsolete. Only J98INITA is supported for A9.3.

1.3.2 Run Integrity Reports

Run all standard integrity reports to ensure that all critical files are in balance before starting the upgrade.

1.3.3 Accounts Payable

The F04571, F04572, and F04573 files will be cleared in your data library as part of the upgrade process. If you have open payment groups, you need to use the Undo key to remove payments that cannot be completed before the upgrade.

1.3.4 Menu History File

Be aware that the Menu History File (F0082H) is cleared during the Upgrade process.

1.3.5 Custom Menus

If you have Custom menus that begin with 'G', you need to have them coded to systems 55-59.

1.3.6 Contract Billing and Service Billing

All Invoice Generation and Journal Generation processes should be completed before starting the upgrade process. By completing these processes the F48910 and F48911 work files will be empty.

1.3.7 Delete Vocabulary Override Record

Use option 13 on menu G90 to delete the V06053A1 Vocabulary Override record with Application Override 77 (77 in the Applic. Override field) if the record exists.

1.3.8 Manufacturing - A7.3 Customers

Rate Schedules are not converted during the A9.3 upgrade. Rate Schedule files and programs changed significantly between A7.3 and A8.1/A9.3. Rate Schedules were replaced with Repetitive Schedules which use the same menu, G3115.

Prior to the upgrade, close all open Rate Schedules in A7.3. Open new Repetitive Schedules in A9.3.

See Doc ID 662219.1 on My Oracle Support.

Close all work orders and run manufacturing and variance accounting before the upgrade.

1.3.9 Sales Orders and Purchase Orders - A7.3 and A8.1 Customers

Software Updates A738355623 and A814653295 are available from the Update Center to assist customers in identifying duplicate sales lines at an open status in the Sales Order (F4211) file. The duplicate sales lines must be cleaned up before setting up the alternate environment or the F4211 file conversion will fail. The update also checks for duplicates in the F4301 file for customers who also use the localization file F76431.

1.3.10 EnterpriseOne (OneWorld) Files - A7.3 Customers

Customers who previously installed EnterpriseOne, are likely to have EnterpriseOne formatted files in their environment. Those files have 'F' for format name instead of 'I' when doing DSPFD on the file. You must delete those files from your environment before setting up your alternate environment in Phase Two. Failure to delete the EnterpriseOne files affects the file conversion process of the upgrade. A Software Update (A738428634) is available from the Update Center to assist you in determining if you have EnterpriseOne formatted files in your environment.

1.3.11 Database Audit Manager and Other Triggers

If you have used Database Audit Manager to attach triggers to files in your production environment, you must deactivate the triggers in your production environment before you save the copy of the production data libraries which you will restore in Phase Two to set up the alternate environment.

Access menu G946 option 4 and verify if any files have the Status *ACTIVE, if yes, then enter a 5 in front of each file listed to turn the trigger off. If you have Option 7, Deactivate All Configurations, on menu G946, you can use this option.

Triggers cannot be turned off or on if the file is locked. Note:

If you have triggers attached to other files, they must also be removed before saving the production libraries. To identify files with triggers attached, use the PRTTRGPGM command to produce a report. Use the RMVPFTRG command to remove triggers from the files.

Step 2 of the upgrade process will halt if triggers are attached to files and you will need to remove the triggers in the alternate environment before continuing with file conversion.

After the production data libraries are saved you can reactivate the Database Audit Manager triggers in the production environment (menu G946 option 8). For other triggers you removed, use the results from the PRTTRGPGM report and then ADDPFTRG command or whatever method you use to add the triggers back to the production files.

Phase Two - Planning and Upgrading the Alternate Environment

This chapter contains these topics:

- Section 2.1, "Overview,"
- Section 2.2, "Set Up an Environment,"
- Section 2.3, "Check for DDM Files,"
- Section 2.4, "IBM Journaling,"
- Section 2.5, "Payroll A7.3 Customer,"
- Section 2.6, "Delete Files,"
- Section 2.7, "Create and Validate Upgrade Plan,"
- Section 2.8, "Start the Upgrade and Track Progress."

2.1 Overview

For this phase of the upgrade, first, restore a set of your A7.3, A8.1, A9.1 or A9.2 data libraries, use the DVD for PC or download the A9.3 software from Oracle's E-delivery site, and then set up an upgrade plan, which defines which data libraries will convert during the upgrade process and the libraries which will contain the new A9.3 software. After the upgrade plan is set up, initiate the upgrade command.

2.2 Set Up an Environment

Note: If you plan to convert multiple environments, please contact Oracle Support Services, JD Edwards World Technical group.

The first step in the upgrade process is to use a recent backup tape to restore your data libraries to another set of libraries. This includes libraries for data, control, and security files. Do not restore a copy of your production object, source or JDFDATA libraries as the A9.3 copy will be restored during the upgrade process.

Note: Library names must not be more than 9 characters.

If you were unable to deactivate triggers from the files used to create your alternate environment, you must remove the triggers from the files in your alternate libraries. Refer to menu G946 option 2 in your production environment for a list of files that have *ACTIVE status.

To remove the triggers from the files in your alternate environment, on a command line, use the IBM command RMVPFTRG for each file in your alternate environment on the list from the prior step.

Next, clear the F98201, F98202, F98203, and F98204 database audit manager files in your alternate library using the CLRPFM command.

Note: Ensure that you entered the alternate environment library name in the RMVPFTRG and CLRPFM commands.

2.3 Check for DDM Files

DDM files cannot exist in the data libraries you restored in the step above for the upgrade to work successfully. Use the WRKDDMF command to check for DDM files. If any exist, delete the files using the DLTF command.

2.4 IBM Journaling

IBM Journaling must be turned off on files that are part of the upgrade plan before you start the A9.3 upgrade.

2.5 Payroll - A7.3 Customer

For release A9.3, for customers upgrading from A7.3, the upgrade process moves all user-defined codes and data dictionary items associated with the previous Payroll system (06) to the Enhanced Payroll system (07). Review customized User Defined Codes and Data Dictionary items as they will also be moved to system code 07.

Some A7.3 customers have an entry for User Defined Codes 07/BC, 07/DB, 07/DM, 07/GR, 07/PC, 07/PF, 07/PG, 07/SC, 07/SG 07/ST, or 07/WP. These values and the UDC Code Type (F5 from the UDC screen) need to be deleted in order to bring over the values correctly. If you have entries for any of these User-defined Codes, you must delete them now. Use option 3 on menu G90 to view User Defined Codes.


2.6 Delete Files

- DLTF FILE(dtalib/F74R0430L*) where dtalib is your data library
- DLTF FILE(dtalib/F74R0430)
- DLTF FILE(dtalib/F74R0433)
- CRTDUPOBJ OBJ(F74R0411) FROMLIB(dtalib) OBJTYPE(*FILE) TOLIB(templib) DATA(*YES)
- DLTF FILE(dtalib/F74R0411)

2.7 Create and Validate Upgrade Plan

2.7.1 Sign on as JDEINSTAL to Access the Software Upgrade Menu

Figure 2-1 Software Upgrade Menu screen

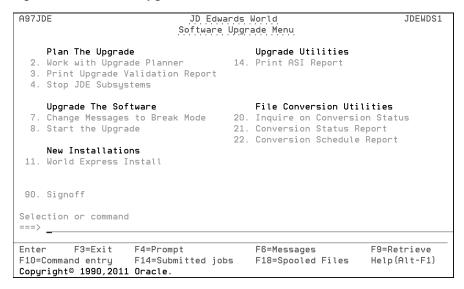

2.7.2 Create Upgrade Plan

From the Software Upgrade Menu (A97IDE), select Work with Upgrade Planner. The Plan the Upgrade screen appears.

Figure 2-2 Plan the Upgrade screen

```
960099
                                 Plan the Upgrade
Action Code. . . \underline{I}
Plan Name. . . ZJDE ALT
Description. . . TEST (ALTERNATE) PLAN
     Enter the name of a Plan.
     You can choose one of the following or copy them
     to create your own plan. Note that "ZJDE" Plans
     cannot be changed or deleted.
     We recommend you review the following:
                 ZJDE - Simple production plan
                 ZJDE_ALT - Alternate upgrade plan
                 ** Press F5 key to enter Upgrade Data **
                                F5=Plan Data
```

This screen is the first of a series of upgrade planner screens, all of which are described below. For more information on the upgrade planner screens - see Appendix B, "Upgrade Planner Screens."


The Plan the Upgrade screen lets you begin to add or change an environment upgrade plan. JD Edwards World recommends that you use the ZJDE_ALT upgrade plan model to create your plan for the alternate environment.

- 1. From the Plan the Upgrade screen, inquire on ZJDE_ALT (an upgrade plan model supplied by JD Edwards World).
- In the Action Code field, type A (Add).
- In the Plan Name field, type a name for the new upgrade plan.

Note: Do not begin your plan name with ZJDE, numbers, or any special characters except underscore (__). Do not use a name for a plan that already exists as a library on your system. Your plan name cannot exceed nine (9) characters.

- **4.** In the Description field, type a description for the new upgrade plan.
- To add the new upgrade plan, press Enter.
- Inquire on the new upgrade plan, and then press F5. The Libraries for This Plan screen appears.

Figure 2–3 Libraries for This Plan screen

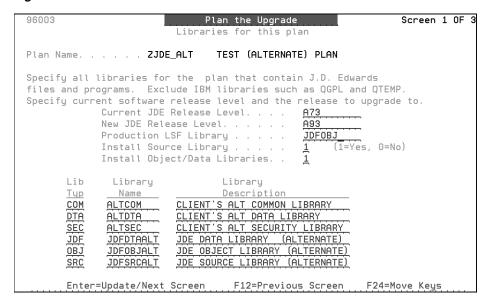

2.7.3 Indicate the Libraries for this Plan

The Libraries for This Plan screen allows you to specify your current and new JD Edwards World release levels, whether you want to install object and data only or source only, and the libraries that define one complete environment. If you have payroll in a separate data library, it must be included as a second DTA type in the plan. It is recommended that you install source.

You can view source only first, set the Install Source Library value to '1' and the Install Object/Data Libraries value to '0'. If you are installing source only, the plan needs to have a JDF and OBJ type library that are populated. You can specify your A7.3, A8.1, A9.1, or A9.2 libraries.

For the Production LSF Library line, fill in the name of your production object library, which contains the F99LSF file. The information from the F99LSF file is copied to the new A9.3 object library during the upgrade process.


MULTI-PLANS: All plans must have the same Current and New JD Edwards World Release Level values. They also must have the same object, JD Edwards World data (JDFDATA), and source library names (library types OBJ, JDF, and SRC). If you need assistance setting up Multi-Plans, contact JD Edwards World Technical support for assistance.

If you make changes to this screen, press Enter. If one or more libraries you specify on this screen do not exist on your machine, the Create Plan Library screen appears. Verify the name of the library, or change it, and then press Enter to create it. The JDF, OBJ, and SRC type libraries are always created for the alternate upgrade.

Note: If the Coded Character Set ID (CCSID) for your system value QCCSID is set to 65535, and if the CCSIDs associated with your data dictionary and DREAM Writer files do not match each other, the Reinstall Language Exception window appears. Enter the correct CCSID.

Press Enter. The Merge Information screen appears.

Figure 2–4 Merge Information screen

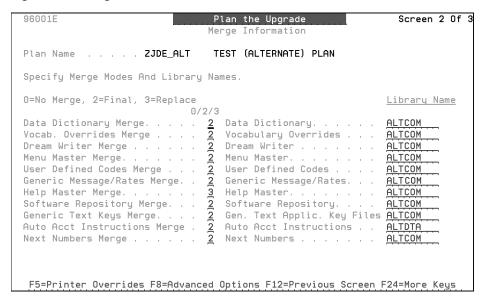

2.7.4 Indicate the Merge Information

The Merge Information screen allows you to specify modes in which you want the merges to run and the library locations of the control files. For more detailed information on the merges - see Appendix B, "Upgrade Planner Screens."


Note: ID Edwards World recommends that you do not change the merge modes. If the library locations are not correct, blank out the library name fields and press Enter. Your libraries will be searched and the correct locations will be retrieved.

MULTI-PLANS: If the plans share the same common files, you do not need to set the merge modes for the shared control files to run for the second and subsequent plans. From this screen, you can access two screens that allow you to override printer file defaults and select advanced functions for the upgrade process. Review these screens to make sure your plans are correct.

- To access the Printer Information screen, press F5 (Printer Overrides).
- To access the Advanced Options screen, press F8 (Advanced Options).

2.7.5 Indicate the Printer Information

Figure 2-5 Printer Information screen

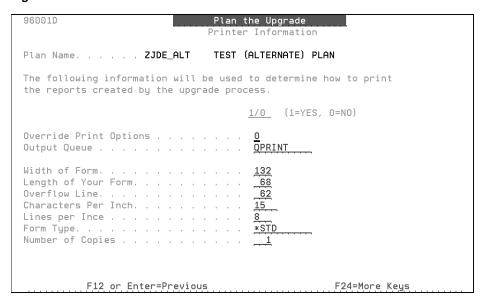


The Printer Information screen allows you to override the default values set for various printer attributes, such as form length, form type, and line spacing.

If you make changes to this screen, press Enter twice. Otherwise, press Enter once. The Merge Information screen reappears.

2.7.6 Select Advanced Options

Figure 2–6 Advanced Options screen

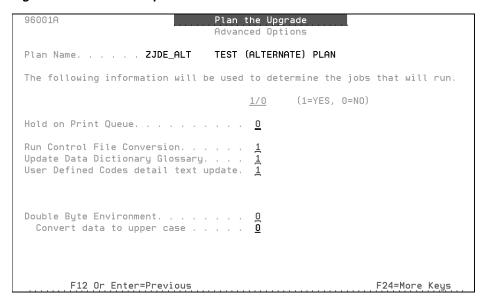

The Advanced Options screen lets you select from several advanced upgrade functions, including enabling or disabling:

- Hold on print queue option
- Control file conversion
- Data dictionary glossary update
- User defined codes detail text update

You can also indicate whether the environment you are upgrading is double byte, and whether you want to convert all display data to uppercase characters.

If you make changes to the screen, press Enter twice. Otherwise, press Enter once. Press Enter to move to the Data Dictionary Field Ownership screen.

2.7.7 Designate the Data Dictionary Field Ownership information


The Data Dictionary Field Ownership screen allows you to indicate fields in the Data Dictionary you want to automatically update with the Data Dictionary merge, which runs during the upgrade process. These are fields that customers may have chosen to modify for their business needs. Other fields that are not modified by customers such as system code are also updated by the Data Dictionary merge.

A 'J' in any field, indicates that the upgrade overrides the value in the customer's library for this field with the value from the JDF type library in your plan.

A 'C' in any field indicates that the upgrade does not replace the value for that field in the customer's library.

After the upgrade, you use the Data Dictionary Workbench to view and reconcile differences for fields with a value of 'C'.

Figure 2-7 Data Dictionary Field Ownership screen

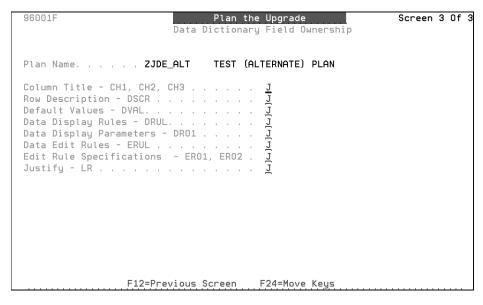

If you do not have many custom Data Dictionary items, enter 'J' in all of the fields and later re-enter your custom Data Dictionary changes. The Data Dictionary merge produces reports and the Data Dictionary Workbench allows you to view the before and after value for all of the fields on the Data Dictionary Field Ownership screen.

Press Enter.

2.7.8 Validate Your Upgrade Plan

The upgrade planner creates the Upgrade Planner Validation Report (R96004YR) when you select Print Upgrade Validation Report from the Software Upgrade Menu (A97JDE). The validation process also creates the Duplicate Files Found Report (R97281) if a processing option for the Upgrade Planner Validation Report is set to a '1'. The DD Field Ownership Report (R96004) prints as part of the validation process.

MULTI-PLANS: You must validate each plan.

Create the validation reports

- Be sure you are signed on as JDEINSTAL.
- From the Software Upgrade Menu (A97JDE), select Print Upgrade Validation Report. A Processing Options Revisions screen appears.

Figure 2–8 Processing Options Revisions screen

98312	Processing Options Revis	sions Form ID P96004YR
ZJDE - Upgrade Planner	Validation Report	Version ZJDE0001 Display Level.
This job has various o press Enter to continu		Enter the desired values and
Enter Environment Name Validate	You Wish to	YOUR PLAN NAME_
Enter 1-If this is a F or 0-if you are Upgr		0
Enter 1-to check for d or 0-to bypass check	uplicate objects	1
Enter Upgrade Type - * *PTF or *ALT	INSTALL *REINSTALL	*REINSTALL
	F5=Printer Overrides	

- Enter the appropriate information in the processing option fields. Specify in the first field an upgrade plan name.
 - Specify 0 in the second field and 1 in the third field, which indicates you want a report created that checks for duplicate files. Specify *REINSTALL in the fourth field.
- After you verify your information, press Enter.
 - The report submits to batch.
- If you receive a message that one or more errors occurred, you have errors listed in the Upgrade Planner Validation Report (R96004YR) and/or duplicate files listed in the Duplicate Files Found Report (R97281).


The Upgrade Planner Validation Report

The report (R96004YR) identifies errors in the information you specified in your upgrade plan. It lists the plan information as you entered it and prints error codes to the right of the incorrect information. A total number of errors are given at the end of the plan information. The error codes that appear on the report are fully described at the end of it, including error descriptions, cause statements, and instructions about resolving the errors. The report must have an error count of zero before you can begin the upgrade process.



Figure 2–9 Upgrade Planner Validation Report, part 1

Figure 2–10 Upgrade Planner Validation Report, part 2

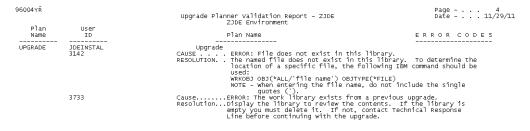

The Duplicate Files Found Report

The report (R97281) identifies any duplicate files in the environment you ran the report against. This report will be created when you create the Upgrade Planner Validation Report. If you set the processing option for the Upgrade Planner Validation Report to check for duplicate files, the report will list the file and the library in which the duplicate was found for each duplicate file, or it will indicate "NO DUPLICATE FILES FOUND."

You need to clean up any duplicate files on the report before you initiate the upgrade. Evaluate the number of records in each duplicate file and note that the system updates the first file in the library list before removing a duplicate file. When you delete files, you must verify that they do not contain any records needed for processing.

Figure 2–11 Duplicate Files Found Report

97281			J.D Edwards & Company Duplicate Files Found Report Plan Name UPGRADE	Page - 1 Date - 11/29/11 Time - 18:48:04
Object	Object	Object		
F0002 F0002 F0003 F0003 F0101 F0101	CLTCRT CLTDRT CLTCRT CLTDRT CLTCRT CLTCRT	*FILE *FILE *FILE *FILE *FILE	Next Numbers - Automatic Next Numbers - Automatic Action Code Security Action Code Security Address Book Master Address Book Master	

The DD Field Ownership Report

The report (R96004) prints the values you filled in on the DD Field Ownership screen for your plan.

2.8 Start the Upgrade and Track Progress


2.8.1 Change Messages to Break Mode

From the Software Upgrade Menu (A97JDE), select Change Messages to Break Mode. This changes the QSYSOPR message queue to break mode.

2.8.2 Start the Upgrade

1. From the Software Upgrade Menu (A97JDE), select Start the Upgrade.

Figure 2–12 JDE Upgrade Command screen

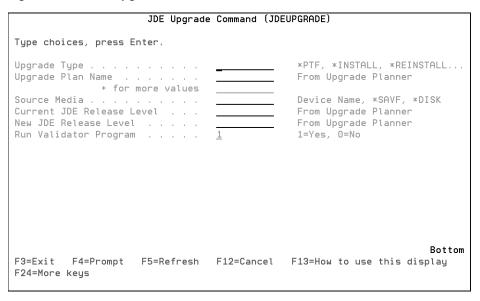

- **2.** In the Upgrade Type field, enter *REINSTALL.
- 3. In the Plan Name field, type the name of the upgrade plan that defines the environment you want to upgrade.
 - MULTI-PLANS: If you are upgrading more than one environment (multiple plans), enter a plus character (+) in the second Plan Name field, press Enter and then enter the additional plans in the fields provided.
- **4.** In the Source Media field, type *SAVF.

- **5.** In the Current JDE Release Level field, type the current JD Edwards World software release level of the environment you want to upgrade (A73, A81, A91, and A92 are valid values).
 - This release level must match the current JD Edwards World release level specified in the upgrade plan.
- **6.** In the New JDE Release Level field, type A93 and press Enter.
 - This release level must match the new JD Edwards World release level specified in the upgrade plan.
- **7.** Leave the default values in the remaining fields.
- 8. Press Enter.

2.8.3 Track the Progress of the Upgrade

The first part of the upgrade process (UPG_STEP1) restores the software from the save files in the JDEINSTAL2 library and sends you a message when system 00 is restored. All systems are included in system 00.

The second part of the upgrade process (UPG_STEP2) submits merges and converts files. These jobs run in the JDEINSTAL subsystem in separate job queues.

Note: Step 2 will halt if there are trigger programs attached to files in your alternate environment data libraries. A query report is produced listing the files with triggers attached. Use the RMVPFTRG command to remove the triggers. You may restart the Upgrade by typing *ALT for the Upgrade Type and *DISK for Source Media on the Start the Upgrade command.

After UPG_STEP2 completes, the upgrade process submits the following job automatically:

Rebuild field reference files (FRFs) and the JD Edwards World message file (J98FRFGEN)

MULTI-PLANS: UPG_STEP1 builds work files for all plans before it begins the restore process. UPG STEP2 performs file conversions and merges for the first environment. An ALT_STEP2 job performs file conversions and merges for each subsequent plan.

Note: JDE and JDEPROD job descriptions are changed in Step 2 to the libraries in the Upgrade Plan. You should not use JDE or JDEPROD as the job description for other user profiles.

Note: The upgrade process produces job logs (QPJOBLOG) for UPG_ STEP1 and UPG_STEP2. Keep job log files (QPJOBLOG) in an output queue where they will not be deleted. They are extremely useful for resolving upgrade issues.

The UPG_STEP1 job log shows what happened during the DVD or Save File restore portion of the upgrade process. The UPG STEP2 job logs (and ALT_STEP2 if upgrading multiple environments) show what happened during file conversions and merges.


2.8.4 Inquire on File Conversion Status

After UPG_STEP2 completes, check for file conversions that completed abnormally and resolve any problems. For detailed information on the File Conversion process, see Appendix C, "File Conversions."

MULTI-PLANS: You must inquire on file conversion status for each plan. Specify each plan name and the associated library name. Do not check file conversion status for an upgrade plan until the associated STEP2 job has finished. The message STEP 2 Completed for Plan name appears for each plan.

1. From the Software Upgrade Menu (A97JDE), select Inquire on File Conversion Status.

Figure 2–13 File Conversion Status Inquiry screen

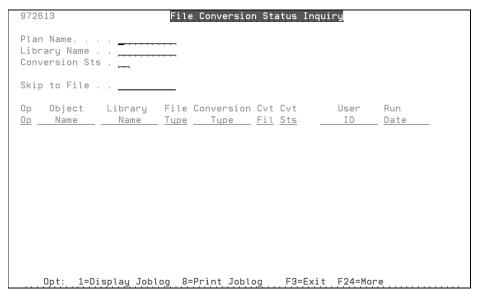

- In the Plan Name field, type the name of the upgrade plan for which you want to check file conversion status.
- In the Library Name field, type the name of your common library.
- In the Conversion Sts field, enter CA (Completed Abnormally).
- To display the job log for a file conversion listed on this screen, in the OP (Option) field next to a file conversion job, enter 1 (Display the job log).
- Repeat steps 3 through 5 for your data and security libraries.
- Note any files that failed conversion and resolve any problems before you continue with the upgrade. For assistance, call JD Edwards World Technical Support. If you need to run single file conversion programs, first you need to perform the following two steps (as noted in Phase Three):
 - Change the QJDF Data Area in JDFOBJALT.
 - Sign On as the Security Administrator User ID you entered during the OUI process. This is the only user who will be able to access the Alternate Environment you want to update until you perform Post Install jobs and evaluate how you want to open up security in the environment. In A9.3, the security setup is delivered in a "no access" state.

Note: If for any reason you must start the upgrade process again because file conversion status showed significant errors, call JD Edwards World Technical Support for assistance.

Go to the Next Phase

Phase Three - Create New Files and Update Control Files

This chapter contains these topics:

- Section 3.1, "Overview,"
- Section 3.2, "Change the QJDF Data Area in JDFOBJALT,"
- Section 3.3, "Sign On as the Security Administrator User ID you entered during the OUI Process,"
- Section 3.4, "Activate Installed Systems,"
- Section 3.5, "Create New Files,"
- Section 3.6, "Optional Files,"
- Section 3.7, "Run the Menu Comparison Report,"
- Section 3.8, "Print Menu, User Defined Code, and New Automatic Accounting Instruction (AAI) Reports,"
- Section 3.9, "Update the Data Dictionary Files Using Data Dictionary Workbench,"
- Section 3.10, "Create/Print ASI Report/Apply ASIs/DREAM Writer Workbench."

3.1 Overview

This phase shows what you must do to activate installed systems, create new files, run the menu comparison report, and update some of your JD Edwards World control files.

MULTI-PLANS: In this phase, you may need to perform the procedures more than

3.2 Change the QJDF Data Area in JDFOBJALT

Use the CHGDTAARA command to change the QJDF in your alternate object library starting at position 181 to the name of the alternate library, which has your security files such as F0092.

CHGDTAARA DTAARA(JDFOBJALT/QJDF (181 10)) VALUE('XXXX') where XXXX is the name of your alternate library containing your security files.

Note: With A9.3, there is no Software Protection Code. If you wish to use Software License Manager in Audit Mode, you will only be able to do that when you are live on A9.3 and have no other environments using Software License Manager on your machine.

3.3 Sign On as the Security Administrator User ID you entered during the **OUI Process**

During the upgrade process, the JDEPROD library list is set up with the libraries from the upgrade plan. The description is JDE World A9.3 Production.

Note: If you have multiple plans, the JDEPROD library list is only set up for the first plan.

Note: If you are upgrading from a release prior to A73 CU 15 or A8.1 CU 6, duplicate the F00944 file with no data from the JDF type library in your plan to your library containing the F0092 file.

The Install History (Type 97 on command line) in the new object library for A9.3 will only contain a record for the upgrade you just completed. You can copy in the install history records from your production object library so that when you GO LIVE on A9.3, you will have a complete install history. Use the following command to update the install history in A9.3:

CPYF FROMFILE(PRODOBJ/T97300) TOFILE(JDFOBJALT/T97300) MBROPT(*ADD)


where PRODOBJ is your production object library and JDFOBJALT is the name of your A9.3 object library.

3.4 Activate Installed Systems

From any JD Edwards World menu, enter G97R42.

From the Upgrade Utilities menu, take selection 6. Place a '1' in the OP field next to any application system, you will start using with the A9.3 release. Place a '2' in the OP field next to any application system you will no longer use. Before activating new application systems, check your contract to ensure that you are licensed to that application. Additional information can be found in the help for this program.

Figure 3–1 Activate Installed Systems screen

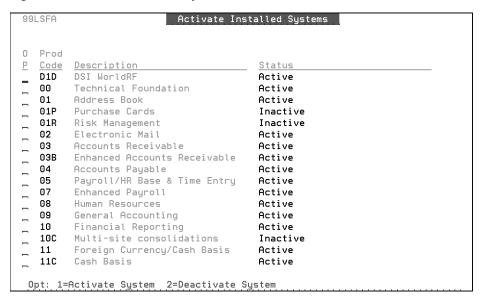


3.5 Create New Files

3.5.1 Build New Files List Report

From the Post Upgrade Menu (G97R4), select Build New Files List.

Figure 3–2 Post Upgrade menu

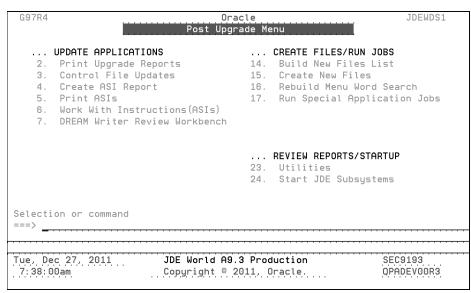

1. Enter the name of the upgrade plan for the environment in which you want to create the new files.

The report job is sent to batch for processing.

When the job finishes, print the New Files List Report (R97452).

Note: Do not proceed to Create New Files until this job finishes.


3.5.2 Create New Files

In this step, you will create new files in your common library, and then the rest of the new files in your production library or libraries. If you have your files split into multiple libraries, such as payroll files in a separate library, you need to do this process several times making sure to create the files in the correct library.

Note: Files which have an entry in the 97/NF UDC file are not created during this process.

From the Post Upgrade Menu (G97R4), select Create New Files.

Figure 3-3 Create New Files screen

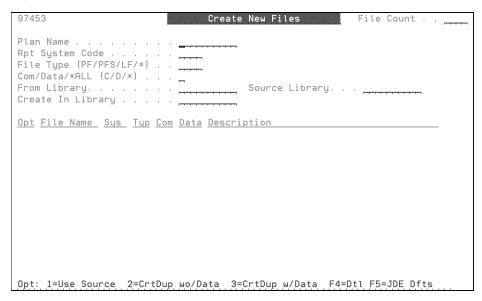


- Type the name of the upgrade plan in the Plan Name field for the environment in which you want to create the new files.
- Type C to show all the common files (in the Com/Data/*ALL field).

Note: If you do not have a common library, type an asterisk (*) instead of C or D in the Com/Data/*ALL field on the screen shown below.

- 4. Enter the name of the common library (in the Create In Library field) in which you want the files created. This library must be defined in the upgrade plan.
- **5.** After you verify your selections, press Enter. Your screen lists the files that JD Edwards World recommends you create in your common library.

Figure 3–4 List of Recommended Files to be Created

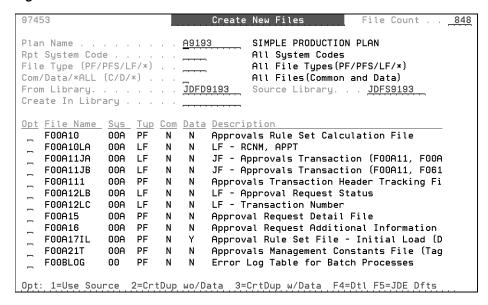

- To select JD Edwards World default options for the Opt (Option) field to the left of each listed file, press F5 (JD Edwards World Defaults).
- 7. To create the new files, press Enter.
- Repeat the steps in this checklist item, but specify the following values:
 - In the Com/Data/*ALL field, specify D to show all the production data files.
 - In the Create In Library field, specify the name of the production library in which you want the files created.

Note: If you have multiple DTA libraries in your plan, make sure to create the new files in the correct library.

Repeat the tasks to Build New Files List Report and Create New Files until the New Files List Report is empty.

Note: If QEBB shows on your list of files to create, use the CRTDUPOBJ command to duplicate it from the JDF type library in your plan to your data library.

Note: If any logical file fails to create because of duplicate records, view the Duplicate Cleanup jobs on menu G97U64 (upgrading from A73) or G97U62 (upgrading from A81) before manually cleaning up duplicate records and then creating the logical using the CRTDUPOBI command. If you use the special jobs on G97U64 or G97U62, you must delete the logical before running the special job, as the logical was created with no members during the create new files build.

3.6 Optional Files

Some new files for A9.3 were not created during the Create New Files process. The files that are optional are listed in User Defined Code 97NF. Use option 4 (User Defined Codes) on menu G97R6 to inquire on UDC 97NF. F21 from the User Defined Codes screen takes you to DREAM Writer P0005P versions list. Copy the XJDE0001 version and change Data Selection to be Product Code EQ 97 and User Defined Codes EQ NF. Execute the DREAM Writer and a report (R0005P) is generated. In the Description field on the report is a short explanation of when the file is needed. If you determine you need the file, you can use the CRTDUPOBJ command to duplicate the file from the JDF type library in your plan to your data library. Not all of the values in UDC 97NF are new for A9.3 so you may already have some of the files in your alternate data library from previous upgrades. Use the WRKOBJ command to determine if the file already exists in your data library.

Note: Not all files listed in the 97/NF UDC table exist in JDFDATA. Use the WRKOBJ command to determine if the file exists in JDFDATA before you attempt to duplicate it to your data library.

3.7 Run the Menu Comparison Report

During the upgrade, the following tasks are completed when the Menu Merge runs:

- Added new menus
- Added new selections to existing menus
- Removed obsolete selections from menus
- Changed selections on menus if there was a replacement program for an obsolete program

The next step is to run the Menu Comparison report. Based on how you complete the processing options, you might have additional work to update your menus.

- From the Control Files Update (G97R6) menu, select Menu Comparison Report.
- In the O (Option) field next to ZJDE0001, enter 1 (Execute).

Figure 3-5 Menu Comparison Report, part 1

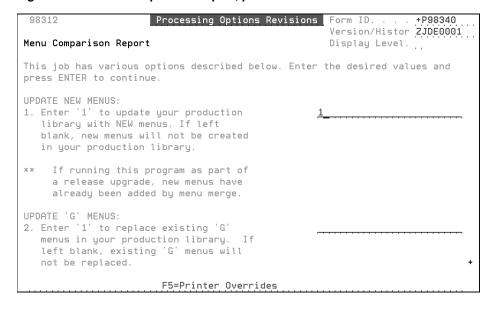


Figure 3-6 Menu Comparison Report, part 2


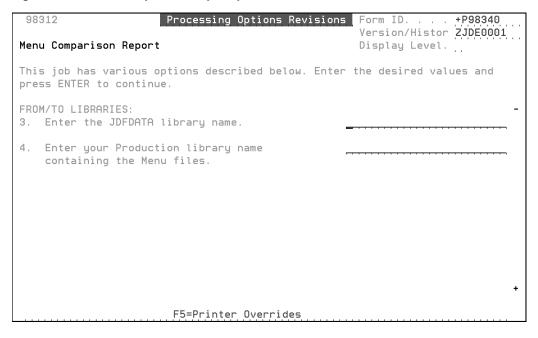


Figure 3–7 Menu Companison Report, part 3

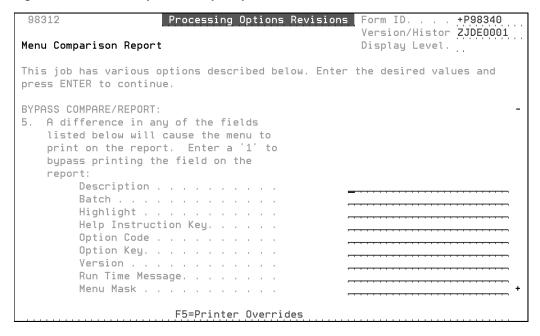

- Enter the processing options with appropriate information:
 - Processing Option one must have a '1'. If left blank, the G menus are deleted from your files
 - For processing option 2, enter a blank and the system creates a Menu Comparison report (R98340). After you review the Menu Comparison report, you can go back and set processing option 2 to a '1', if you want to overlay G menus. If you decide to overlay the G menus, you can then use the Menu Comparison report to make any custom changes such as menu masking.

Note: If you have custom G menus, they must be coded to systems 55-69 to be retained, if you enter a '1' in processing option 2. Custom menus that do not begin with 'G' are ignored regardless of system code.

During the Menu Merge, options were removed from your custom menus if that program is now obsolete and has no replacement program. Programs that are obsolete have a record in the F9806 file.

- Processing option 3 is the JDF type library name from your plan
- Processing option 4 is the COM type library name from your plan, assuming that is the library containing the menu files
- If you did not enter a '1' for processing option 2, use the Menu Comparison report to make changes to your menus by either copying the menus or changing individual selections. Procedures for both methods are detailed in the Update the Menu files section.

3.8 Print Menu, User Defined Code, and New Automatic Accounting Instruction (AAI) Reports

From the Post Upgrade Menu (G97R4), select Print Upgrade Reports.

The Work with Spooled Files (WRKSPLF) screen appears.

- In the User field, enter JDEINSTAL.
- Print the following reports if they have not been printed already.

Number	Description
R97883A	Menu Merge Exceptions Report
R987241	User Defined Code Merge Report or view online
R98727	New Automatic Accounting Instructions (AAI) Report

3.8.1 Update the Menu Files

You can update the menus by either replacing them or changing selections in them individually. Use the Menu Merge Exceptions Report (R97883A) and the Menu Comparison Report to determine the changes to make.

> **Note:** If you overlaid the G menus when running the Menu Comparison Report, you do not need to Update Menus.

How to use the Menu Exceptions Report

Review the Message column on the report. Possible messages are:

New pgm for release

Indicates that the program was added to a menu. Consider setting up menu security for these menu selections.

Program might be obsolete

Indicates that the program shown in the Job to Execute column on the report is obsolete and the merge did not find a program to replace it. The merge attaches a menu message warning to menu selections that access the obsolete programs. You must remove these programs from the menus unless the programs exist in a custom library.

* Review Security

Indicates that you must review the menu selection for security setup. The selection is secured because it calls a job that was previously secured in your menu file. However, security setup is inconsistent, and requires your review.

Cannot add sel to menu

Indicates that the merge unsuccessfully attempted to add a selection because no selection spaces were available on the menu. Use option 6 on menu G97R6 to copy the menu from the JDF Type library in your plan to the library containing the menu files.

Opt key/vers not found

Indicates that the merge did not find a form ID or version in the DREAM Writer files. Ignore those that have *NONE in the Option Key field.

Figure 3-8 Menu Merge Exceptions report

97883A	Library IDEDRI		J.D. Edwards Menu Merge E	& Company xceptions			Page – 1 Date – 11/22/11 Mode – Update
TO Li Menu Id	Library – JDFDRT brary – CLTCRT Menu Title	s1 No	Selection Description	Job to Execute	Option Key	Version	Message
G00 G00VENDA	Drary — CLICRI Menu Title General Systems Buyer Self-Service - Stock Buyer Self-Service - Encumbran Payment Terms Revisions Japanese Consumption Tax	18	Business Values List Cats Enter Blanker Orders Enter Quote Orders Enter Requisitions Receipts by Purchase Order Open Order Inquiry Open Requisitions Inquiry Open Requisitions Inquiry Supplier Ledger Inquiry Supplier Ledger Inquiry Supplier Ledger Inquiry Supplier Summary Applied Titem Summary Applied Carpers Litem Search Litem Search Litem Search Summary Availability Detail Availability Detail Availability Detail Review - PO Orders Awaiting Approval Requisitions Awaiting Approval Require Person P	30060 34311 34311 34311 34312 3430301 3430301 3430301 3430301 3042004 343230 301051 341200 34111 341023 341023 341023 343080 343081 343080 343081 343080	P4311 P4311 P4311 P4312 P430301 P430301 P430301 P430301 P042003 P042004 P43230 P01051 P41200 P4111 P41200 P41023 P41023 P4103 P43080 P43080 P43080 P43080 P43080 P43080 P43080 P43080	W/JDE0006 W/JDE0002 W/JDE0003 W/JDE0001	New pgm for release Cannot add sel to menu
GOOVENDB	Buyer Self-Service - Stock		Test P42180 Enter Blanket Orders Enter Quote Orders Enter Quote Orders Enter Requisitions Receipts by Purchase Order Open Order Inquiry Open Requisitions Inquiry Open Requisitions Inquiry Supplier Ledger Inquiry Supplier Ledger Inquiry Supplier Payment Inquiry Supplier Teem Summary Address Book Item Search Item Ledger - CARDEX Summary Availability Detail Availability Buyers Information Approval Review - PO Orders Awalting Approval	343180 34311 34311 34311 34312 3430301 3430301 3430301 3430301 3430301 342004 342004 342200 301051 341200 34111 341023 34115 343080	P43180 P4311 P4311 P4311 P4312 P430301 P430301 P430301 P430301 P042003 P042004 P43230 P01051 P41200 P4111 P41202 P4115 P43080 P43081	WJDEOOO1 WJDEOOO7 WJDEOOO7 WJDEOOO00 WJDEOOO000 WJDEOOO000 WJDEOOO000 WJDEOOO000 WJDEOOO000	cannot add sel to menu
G00VENDC	Buyer Self-Service - Encumbran		Requisitions Awaiting Approvl Approval Review - Reds Supplier Payment Inquiry Address Book Buyers Information Approval Review - Po Orders Awaiting Approval Requisitions Awaiting Approvl Approval Review - Reds	J43081 J43080 J042004 J01051 J4115 J43080 J43081 J43081 J43080	P43081 P43080 P042004 P01051 P4115 P43080 P43081 P43081 P43080	W/JDE0001 W/JDE0001 W/JDE0001 W/JDE0001 W/JDE0002 W/JDE0002 W/JDE0001 W/JDE0001	Cannot add sel to menu Cannot add sel to menu
G00141	Payment Terms Revisiions	21	Update A/P Vouchers	J005141 J005142	P005141		New pgm for release
G00212	Japanese Consumption Tax	08	Japanese Era Dates	10089	. 505146		New pgm for release


After you determine the changes you need to make, use one of the following methods to make your changes.

3.8.2 Copy the Entire Menu

Note: If you use this copy feature, any security you had set up for the affected menu must be set up again.

From the Post Upgrade Menu (G97R4), select Control File Updates. From the Control File Updates menu, select Copy DD, VO, DW, UDC, SVR, Menus.

Figure 3-9 Copy DD, VO, DW, UDC, SVR, Menus screen

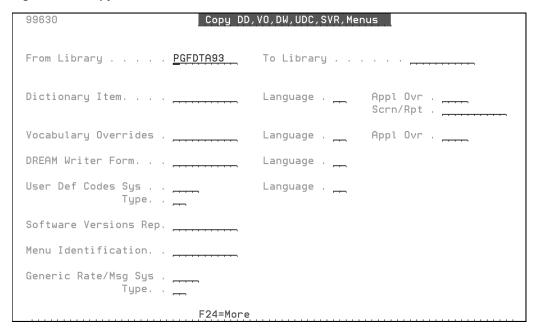

1. Enter the appropriate libraries in the From Library and To Library fields, and the menu you want to copy in the Menu Identification field.

3.8.3 Update a Menu Selection

From the Control File Updates menu (G97R6), select Menu Selections.

Figure 3-10 Menu Selections screen

00908 Action Code Menu Title Advanced/Tech Menu Class	Menu Id Setup M Product	enu .	A J K DP F Lock . Level of Displa
Selection Job to Execute . Menu to Execute . Option Code Appl Override	Batch. Help In	Highl st Key Key .	ight. <u>A J K DP F</u> Sel Lock . Version Cntry/Reg
F4=Skip To F5=U	odt w/Redisplay F	6=Browse F18=Sec	urity Review F9=Search

1. Inquire on the menu and make the appropriate changes.

3.8.4 Update the User-defined Code (UDC) Files

You might need to update the UDC tables based on information on the User Defined Code Merge report (R987241).

How to use the User Defined Code Merge Report

Using the User Defined Code Merge report you printed earlier, identify the UDC tables that have ** Already Exists in the Merge Result column. This means that the new value in the Description 1 column was not added to your UDC table because one exists already. You need to check these UDC tables to make sure your codes are described accurately.

Figure 3-11 User Defined Code Merge report

9872	41		J.D. Edwards User Defined C					Date - 11/22/11 Page - 1 From - JDFDRT To - CLTCRT
Sys	Code	Code	Description 1	Description 2	Cde	2nd	Cde	Mode - Final Merge
00	AA AA AA		Generic Y, N only No Yes		01	N	N	New UDC Table F0005 Added F0005 Added
00	AB AB AB AB AB AB AB AB	A C E I L M O	Activity Based Cost Type Address Book Number Business Unit Number Equipment Number Item Number (Short) Lease Number Summarized Work Order Number Order Number Work Order Number	Hard Coded Edit in F0101 Hard Coded Edit in F0006 Hard Coded Edit in F1201 Hard Coded Edit in F4101 Hard Coded Edit in F4101 Manufacturing Summarized J.E. Hard Coded Edit in F4201 Hard Coded Edit in F4801	01	Υ	N	New UDC Table F0005 Added F0005 Added F0005 Added F0005 Added F0005 Added F0005 Added F0005 Added F0005 Added
00 00	AD AT AT AT AT AT AT	PD PH TC 01	Approvals Rule Set Calculation Approval Type Address Book Purchase Order Detail Purchase Order Header Timecard Address Book RTE Item RTE		10 02	Y N	N N	New UDC Table New UDC Table F0005 Added F0005 Added F0005 Added F0005 Added F0005 Added F0005 Added
00	AU AU AU AU AU	AB P* PD PH	Approval Type (Workbench) Address Book Purchase Order (All) Purchase Order Detail Purchase Order Header Timecard		02	N	N	New UDC Table F0005 Added F0005 Added F0005 Added F0005 Added F0005 Added
000	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	POOEPURGE POO18IE POO18IK POO18IK1 POO922P POO9253P POO9253P POO9255P PO19255P PO19255P PO19401 PO14031 PO14031 PO14031 PO3413 PO3413 PO3413 PO35001 PO35001 PO3505 PO35111 PO3505 PO35111 PO3505 PO35111 PO3505 PO3	Batch Export Enabled Program EDD Transaction Purge Report English Format Intrastat repor English Firt Intrastat RPT DSK English English English Report English	ANS1 ANS1 ANS ANS1 PYE	10	Υ	N	New UDC Table F0005 Added

3.8.5 Review and Update a UDC

From the Control File Updates menu (G97R6), select User Defined Codes.

Figure 3–12 User Defined Codes screen

00051	User Defined O	
Action Code		Product Code
Code		Description-2
F5=Code Types F	14=Memo F15=Where Used F	F18=Translate F21=Print F24=More

- Inquire on a UDC table you want to review.
- Verify whether your codes are described accurately. If necessary, change your descriptions to match those that appear on the report.

3.8.6 Update the Automatic Accounting Instruction (AAI) Files

You might need to update the AAI tables based on information on the New Automatic Accounting Instructions (AAI) report (R98727).

How to use the New Automatic Accounting Instructions (AAI) Report

Using the New Automatic Accounting Instructions (AAI) report you printed earlier, identify the automatic accounting instructions that the merge added. The merge assigned company 00000 to each new AAI and did not assign account numbers to them.

Based on the information in the Account Use Description column on the report, you might need to change company 00000 to your company number and indicate your account number. In some cases, you might need to add additional AAIs for your company or companies and assign appropriate account numbers.

Note:	Do not add AAI GR.


Figure 3–13 New Automatic Accounting Instructions (AAIs) report

98727 J.D. Edwards & Company New Automatic Acctg Insts(AAI) Page - 1
Date - 11/22/11
From Libr - JDFDRT
TO Libr - CLTDRT
Mode - Final Sequence Syst Number Code Item Number Co Account Use Description Expense Account - PCards
Liability Account - PCards
Book differences between
F0311 and F0911 Distribution.
Used by EURO Integrity F03711.
Book differences between
F0311 and F0911 AE Offset.
Used by EURO Integrity F03711.
Netting 00000 00000 3.000 03 AER 00000 3.000 03 Used by EURO Integrity p03711.
Netting
Suspense Account
Accounts Receivable Tax
Retention-deferred tax
Accounts Receivable class Default if G/L Class code
field is left blank.
(customer Master, Invoice
Entry screens)
Book differences between
F0411, F0414 and F0911 Distribution. Used by EURO
Integrity P04711 and P04712.
Book differences between
F0411, F0414 and F0911 AE
offset Used by EURO
Integrity P04711 and P04712.
1099-MISC Oirect Sales
Beginning Range 1 00000 3.511 03 RCVATD 00000 3.110 03 RC3015 00000 3.110 03 ADP 00000 4.000 04 AEP 00000 4.000 04 PX4901 00000 1.520 09 PXA901 00000 1.320 09 1093-MISC Direct Sales
Beginning Range 1
PXA902 00000 1.520 09 1099-MISC Direct Sales
Ending Range 1
PX0501 00000 1.520 09 1099-INT Investment Expenses Beginning Range 1
P×1502 00000 1.520 09 1099-INT Investment Expenses

3.8.7 Review and Update an AAI

From the Control File Updates menu (G97R6), select Automatic Accounting Instr.

Figure 3-14 Automataic Accounting Instructions screen

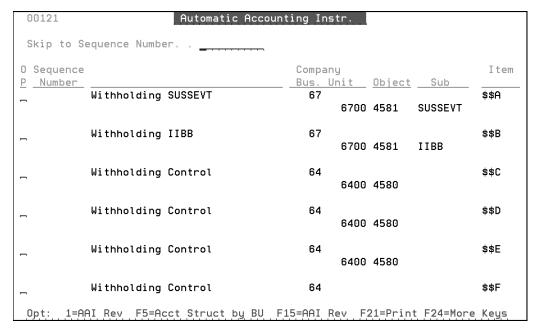

1. Press F15 (AAI Revisions).

Single AAI Revisions Action Code. Product Code ___ Account Codes Option Options: Business Unit. O = Optional R = Required Object Account Subsidiary _ N = Not Used Account Use Description. F21=Print Automatic Accounting Instructions F24=More Keys

Figure 3–15 Single AAI Revisons screen

Inquire on an Item number and change the account number for company 00000, or add new AAIs for your company or companies and assign appropriate account numbers.


3.9 Update the Data Dictionary Files Using Data Dictionary Workbench

The Data Dictionary workbench is used to review and reconcile changes not automatically applied by the Data Dictionary merge. The fields that will be reviewed are those that had a 'C' on the DD Field Ownership screen in the plan used for the upgrade. The user will apply a resolution code that applies the change to the Data Dictionary files.

Note: If all fields were set to 'J' on the DD Field Ownership screen used in the upgrade, you may bypass this section. The Data Dictionary Workbench file (F97806) is replaced each time you run an upgrade.

- 1. From the Control File Updates menu (G97R6), select Data Dictionary Workbench. After reading the WARNING press F6.
- Enter the name of the upgrade plan in the processing option on the Data Dictionary Workbench initial screen. Press Enter.

Figure 3–16 Data Dictionary Workbench initial screen

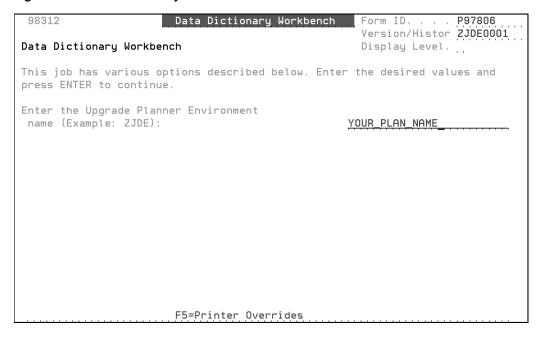

The Data Dictionary Workbench screen (97806) appears.

The From lib is the A9.3 JDF type library from your upgrade plan.

The To Lib is the name of the library for the Data Dictionary merge on the merge information screen of your plan.

'AJ' in the Resolution Code (Rs Cd) column indicates that the changes were applied by the Data Dictionary merge.

A blank in the Rs Cd column shows which Data Dictionary items need to be reconciled.

Figure 3-17 Data Dictionary Workbench screen

97806		Data Dict	ionary Worl	kbench	Plan Name.	A9193
Action Cd <u>I</u>						
DD Field . *	OR	*	OR *			
Resolution *	Orig	ginal Value	ж			
Data Item. *		JDE Value.	*			
Scrn/Rpt . *	Alia	as Type *	Fld Alias	*		
Appl Ovrrd *		guage . 🔻	From Lib.	JDFD9193	To Lib.	DTA91
O Rs Data	DD					Appl L
P Cd Item	Field	Current Va	1110			Ovr
AJ #AUD	DVAL	*BLANK	itue			001
AJ #AUD	ERO1	1 ' '				
	ERUL	VALUE				
_ AJ #CQ	CH1	Cumulat				
_ AJ #CQ	CH2	Quanti	τy			
_ AJ #CQ	CH3					
_ AJ #CQ	DRO1	М				
_ AJ #CQ	DRUL	CODE				
_ AJ #DIA	ER01	0 Q F B 1	2 3 4 ′′			
_ AJ #DIA	ERUL	VALUE				
_ AJ #EAS	CLAS					
_ AJ #FQG	ER01	82				
Opt: 1=Speci	fications	2=Glossar <u>ı</u>	y 3=Where	Used		

The Data Dictionary Workbench can be queried by any of the fields in the header portion of the screen. The help instructions provide a detailed explanation of search capabilities for the workbench.

Each Data Dictionary item that does not have 'AJ' in the Rs Cd column requires a decision. In order to apply changes, you must place 'C' in the Action Cd field and press Enter to activate the Rs Cd field. F4 shows you the original value for the Data Dictionary field and the New A9.3 JDE Value.

The options are:

- 'J' The JDE World value is applied to your Data Dictionary.
- 'C' Your original value for the specified Data Dictionary field is retained.
- 'M' Manual Change has been applied.

3.10 Create/Print ASI Report/Apply ASIs/DREAM Writer Workbench

Use option 2 (Versions List) on menu G81 to copy the ZJDE0002 for Form P98490 to your own version. Run your version to generate the ASI report.

The DREAM Writer data selection screen for Print Instructions (ASIs) appears. You will need to change the DREAM Writer data selection screen for ASI Report Instructions by System.

Form ID. . . . P98490 98302 Create ASI Report Version/Histor ZJDE0002 ASI Report Instructions by System NUMERICS-DECIMAL POINTS ARE NOW ENTERED Explanation Selection . Value Rel. Y Release. . . EQ A93 And EQ Y Product Code *ALL And Y ASI Type EQ *ALL Y Priority . And EQ <u>*ALL</u> Y ASI Parameter. And EQ *ALI And Y Menu Job to Execute. EQ *ALL And Y SAR Number . . *ALI F4=Extra Data F5=Updt w/Redisplay F16=Display All Data Fields

Figure 3–18 Create ASI Report screen

- Change the Release value to A93, and press Enter.
- If you are upgrading from A7.3 or A8.1, create additional ASI reports for A91, A92, and A92PC00001. If you are upgrading from A9.1, create additional ASI reports for A92 and A92PC00001.

3.10.1 Print ASI Report

From the Post Upgrade Menu (G97R4), select Print ASIs.

1. Print the following reports if you created them in the previous item:

Number	Description
R98490	ASI Report

3.10.2 Work with Application Specific Instructions (ASIs)

Run Special Job

Run the Create/Change P record for DW special job from menu G97U74.

Display the ASIs

From the Post Upgrade Menu (G97R4), select Work With Instructions (ASIs).

Figure 3–19 Work with Instructions (ASIs) screen

98292	Work W	ith Instructions(ASIs)
Reportin	ng System	. Release A93
	· · · · · — — — — —	New Software Library (From) JDFD9193
ASI Sta	tus Selection 💌	Current Common Data Library(To) . DTA91
		Current World Writer Library(To).
0 SY	_	Last
P CD	Type	<u>ItemUpdated</u>
_ 00	Automatic Accounting Inst	
_ 00	DREAM Writer	P00151
_ 00	User Defined Codes	00DI
_ 00	User Defined Codes	00DT
_ 00	User Defined Codes	0010
_ 01	User Defined Codes	01HL
_ 04	Special Instructions DREAM Writer	F04581 P041015
_ 04 _ 04	DREAM Writer	P04514CMP
04	DREAM Writer	XT0413
04	User Defined Codes	00BT
04	User Defined Codes	04PP
07	Special Instructions	F06723
07	User Defined Codes	07J
07	User Defined Codes	07M
	User Defined Codes	07NA
Opt:	3=Copy 4=Select ASI	F3=Exit F5=Select ALL ASI F24=More Keys

1. In the Release field, type A93.

WARNING: If you are upgrading from release A7.3 or A8.1, you must display and apply the A91, A92, and A92PC00001 ASIs in consecutive order before you apply the A93 ASIs. If you are upgrading from A9.1, display and apply the A92 and A92PC00001 ASIs before you apply the A93 ASIs.

- 2. In the New Software Library (From) field, type the name of the JDF type library from your plan.
- 3. Leave the value in the ASI Status Selection field set to an asterisk (*), which displays all ASIs (whether applied or not).
- **4.** In the Current Common Data Library (To) field, type the name of the common library that contains the control files you want to update.
- **5.** If you have the World Writer system, in the Current World Writer Library (To) field, type the name of the production data library that contains the F82100 World Writer file.

After you verify your information, press Enter and then press F5 (Select ALL

The screen lists all the ASIs for the application systems you have on your machine.

Apply the ASIs

- If an ASI affects a file located in a library that is different than the one appearing in the Current Common Data Library (To) field on the Work With Instructions (ASIs) screen, change the library name in that field to the appropriate one.
- For DREAM Writer ASIs, each one instructs you to update a certain version for a form ID. You should update any other versions that are based on that version also.
- If you need to update secured DEMO DREAM Writer versions, you must unsecure them first by using the Report Version Security selection from the Security Advanced and Technical Ops menu (G9431).

The DEMO user profile must exist on the IBM side and in the F0092 file in the A9.3 environment. Use option 6 on menu G9401 if you need to set up the DEMO profile in the A9.3 environment.

Put D (DREAM Writer), F (FASTR), or S (STAR) in the Report Writer Type field; DEMO in the Version Owner field; * in the Form ID field and '0' in the User Exclusive field.

After all ASI changes are complete, if you want to re secure the versions, do the same steps except put a '1' in the User Exclusive field.

The Last Change User ID on versions you update will change to the ID of the user who makes the changes. The original owner will not be changed, for example DEMO.

Note: Some of the ASIs may already be done in your environment. For A9.3, some of the ASIs are from previous A7.3, A8.1, and A9.2 updates.

1. From the Work With Instructions (ASIs) screen, press Enter.

The detail for the first ASI listed and selected on the Work With Instructions (ASIs) screen appears.

Figure 3–20 ASI Inquiry/Update screen

A81 ASI Inquiry/Update Ty / Item. DW / PUIRFEI Priority 1 DREAM Writers Form ID: PUIRFEI Version Number: ZJDE0001 Procedure: Change Reason: Change values for processing options 1 and 2. From the Processing Options Revisions screen: PROCESSING OPTION NUMBER NEW VALUE ZJDE0004 2 ZJDE0001 Enter=Go to Next ASI F6=Copy New to Prod F10=Chg Prod F11=View New F24=More

- At this point, ASIs are applied two ways:
 - Copy the item affected by this ASI in its entirety from the JD Edwards World data library to your production data library, or
 - Update specific data associated with the item according to information contained in the ASI.

Note: If the Procedure on the ASI does not say COPY (F6) we recommend you apply the change manually (F10).

To copy the item in its entirety (F6).

To copy an entire item from the JD Edwards World data library, press F6 (Copy New to Prod). The Record Transfer screen appears with the appropriate fields filled in. Press Enter to copy the item and return to the ASI Inquiry/Update screen. Press Enter again to continue to the next ASI.

Note: This copy feature cannot be applied to automatic accounting instructions (AAIs) or next numbers.

To update specific data associated with the item (F10).

To update the data, press F10 (Change Prod). The appropriate screen from which to manually apply this ASI appears. After you update the item, press F3 to return to the ASI Inquiry/Update screen. Press Enter to continue to the next ASI.

3. Continue to apply the ASIs by using the above methods until the Work With Instructions (ASIs) screen reappears. The Last Updated fields indicate the library locations where the ASIs were applied.

MULTI-PLANS: The Last Updated fields will help you determine the last library in which the ASIs were applied.

Additional ASI Instructions:

- Single Byte customers executing the F48019 DBAM ASI will first need to apply Software Update A934118308.
- All customers These are additional instructions for the F48019 DBAM ASI.

In step 6, the last paragraph is incomplete. The sentence should be – We recommend at minimum the following three fields have an option 2 placed on them (rather than option 1): WASRST (Status), WADRQJ (Requested Date), and WAUORG (Quantity Ordered). When finished, all fields should have a value of '1' or '2' placed on them. Press Enter. See Doc ID 1279122.1.

Additional Special Instruction

"CPYF FROMFILE(templib/F74R0411) TOFILE(dtalib/F74R0411) MBROPT (*REPLACE) FMTOPT(*NOCHK)

Templib is the library you created in Section 2.5.

3.10.3 Use the DREAM Writer Review Workbench

The DREAM Writer Review Workbench (contained in files F9835, F9836, F98361, and F9837) allows you to review changes the DREAM Writer merge made to many of your versions.

Because some versions either have no user interface or are recursive in nature, you must review them at this time. The workbench identifies the Form IDs for these versions with a review type of asterisk (*), which indicates mandatory review.

You will need to review other versions that the upgrade process changed. However, you do not need to review them at this time. They include changes to processing options, data selection, and data sequencing. You can review the versions now by using the workbench (use a review type of blank, which includes versions of review type *). If you do not review them at this time, users will be required to review them as they use them. When you attempt to run one of these versions for the first time, a window appears that indicates the DREAM Writer parameters that have changed for that version. If users are reviewing the versions at runtime, they should pay special attention to Processing Option changes. Values should be reviewed as they may have shifted to a new sequence in the processing options.


Note: You must have proper authority to use the DREAM Writer Review Workbench. Otherwise, you will receive a security error when you attempt to change a version. To unsecure a Form ID and its associated versions, select Report Version Security Advanced and Technical Ops menu (G9431).

There are some DREAM Writer forms for which the based on file has changed. It is important that you verify and possibly correct the data selection and/or sequencing on versions you created at earlier releases before attempting to run your DREAM Writer versions of these forms. The following is a list of DREAM Writer forms where the Based on File changed and which version you should use for verifying that the data selection/sequencing is set correctly for your versions. If more than one version is listed for verification, you will want to use the version that you based your customer version on.

DREAM Writer FORM	Version to Use for Verification
P013151	ZJDE0001
P74SC125	XJDE0001
P74SL650	XJDE0001
P082800	XJDE0001 or XJDE0002
P062001	XJDE0001
P00PURGE	ZJDE0029, ZJDE0030, ZJDE0031, ZJDE0032, ZJDE0045, or ZJDE0046
P30820	ZJDE0001
P30835	ZJDE0001
P3411A	ZJDE0001
P39120	XJDE0001 or XJDE0003
P42642	ZJDE0001
P42995	XJDE0001, XJDE0002
P471411	ZJDE0001
P48210	ZJDE0001
P42642	ZJDE0001

1. From the Post Upgrade Menu (G97R4), select DREAM Writer Review Workbench.

Figure 3-21 DREAM Writer Review Workbench screen

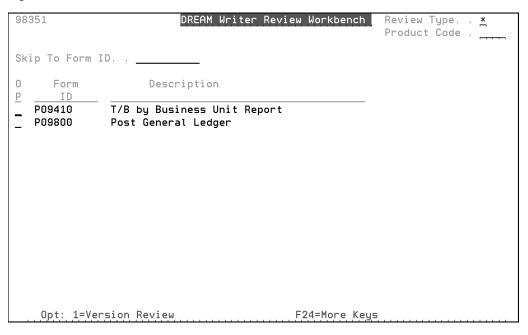


By default, the screen lists the Form IDs you must review at this time (record type *).

Note: If you want to list all Form IDs that require your review, enter a blank in the Review Type field.

2. To list all of the versions associated with the first form ID, in the OP (Option) field next to it, enter 1 (Version Review).

Figure 3-22 DREAM Writer Version Review screen

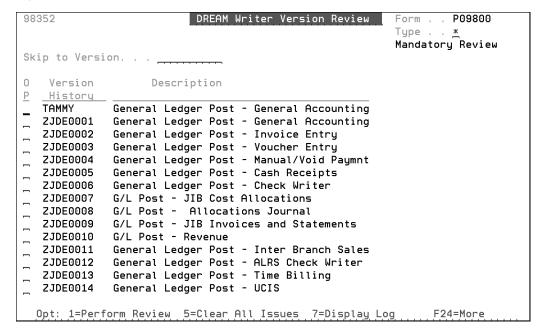

3. In the OP (Option) field next to the first version, enter 1 (Perform Review).

Note: If you do not want to review a specific version, in the OP (Option) field next to the version, enter 5 (Clear All Issues).

Figure 3-23 DREAM Writer Review screen



This window shows the DREAM Writer parameters that you need to review. Possible parameters include processing options, data selection, and data sequencing. Some versions do not require you to review all three parameters, such as the one above.

4. To review the parameters, make sure the parameter fields are set to 1 (Review), and press Enter.

When you review the parameters, the field values you need to check are highlighted. Verify that they will produce the results you expect. If you do not want to review the changes, press F6 to continue.

Note: To examine the fields that the upgrade process deleted for data selection, or that the process changed or deleted for data sequencing, press F17.

5. Repeat these procedures for each version associated with a Form ID that requires your review.

MULTI-PLANS: You must sign on as a user to each production library that contains a DREAM Writer file.

Go to the Next Phase

Phase Four - Run Special Application Jobs

This chapter contains these topics:


- Section 4.1, "Sign On as the User ID you entered during the OUI process,"
- Section 4.2, "Access the Post Upgrade Menu,"
- Section 4.3, "Rebuild Menu Word Search,"
- Section 4.4, "Run Special Application Jobs,"
- Section 4.5, "Activate Triggers,"
- Section 4.6, "Rebuild DD/VO,"
- Section 4.7, "Only if You Use a Comma for the Decimal Character."

4.1 Sign On as the User ID you entered during the OUI process

4.2 Access the Post Upgrade Menu

From any JD Edwards World menu, enter G97R4.

Figure 4-1 Post Upgrade Menu screen

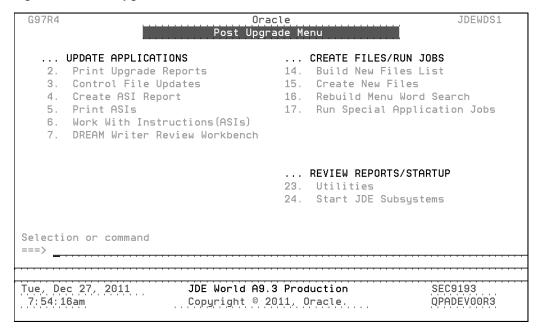

4.3 Rebuild Menu Word Search

From the Post Upgrade Menu (G97R4), select Rebuild Menu Word Search. The job submits to batch.


4.4 Run Special Application Jobs

You must select jobs in the order in which they appear for a product group. Be sure to read the menu message that appears after you select a job.

MULTI-PLANS: You must run the appropriate special application jobs against each data library defined in your plans.

1. From the Post Upgrade Menu (G97R4), select Run Special Application Jobs. The A9.3 Special Jobs Menu appears.

Figure 4–2 A9.3 Special Application Jobs screen

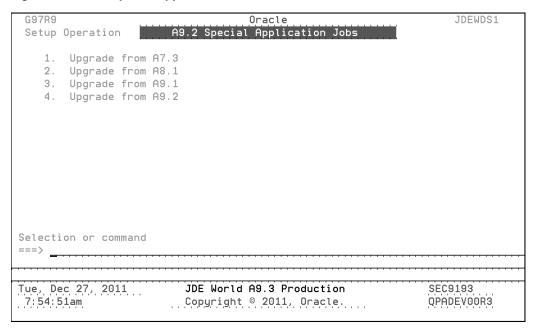


Each of the selections that appear on this menu access an A9.3 Special Application Jobs menu specific to the release level you are upgrading from.

From this menu, select the release you are upgrading from.

The appropriate A9.3 Special Application Jobs menu appears, as shown in the example below.

Figure 4–3 A9.3 Special Application Jobs menu

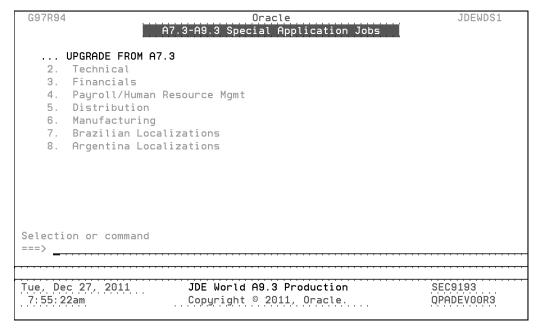

- **3.** Required jobs are listed by product group. To display the jobs for a particular product group, select the appropriate product group from the Special Application Jobs menu.
- **4.** Run the jobs for each product group that you have installed.

Single Byte Customers ONLY - Software Update A934160908 must be installed if you are running option 22 on menu G97U34.

Note: If you are running any special application jobs to build logical files that did not built during create new files because of duplicate records, you must first delete the logical file from your environment if it exists as it would have been created with no members during the create new files process.

- **5.** Corrections to special jobs menu messages:
 - G97U34 option 13 can be ignored if you ran G97U141 option 2.
 - Option 3 on menus G97U74 and G97U72 require the A7.3 or A8.1DREAM Writer files.

WARNING: If you are upgrading from A8.1, A9.1, or A9.2, and you will use A9.3 Financials or Purchase Cards, you must ensure that the J0911QD2 job is run and completed normally before entering any data.

The job is on menus G97U22 (option 9), G97U25 (option 2), or G97U26 (option 4). Use the menu that corresponds to the upgrade you are performing. This job will left justify any of the 8 character Enhanced Subledgers for Enhanced Subledger Types A, E, O, W, L, I, or J that were entered in the G/L file (F0911) for release A8.1, A9.1 or A9.2 OR to the Purchase Card Transaction file (F01P111) for release A9.1 or A9.2.

If you have any questions, please contact the Oracle Support Services World Financials group.

4.5 Activate Triggers

If you require triggers on your alternate environment, you must start with new audit files and activate the triggers in the alternate environment. Do not use Menu G946 option 8. If you use this option, triggers are activated for your alternate environment files but records are added to your production audit files.

4.6 Rebuild DD/VO

From the Post Upgrade Menu (G97R6), select Rebuild DD/VO only if you used the Data Dictionary workbench to apply any row or column changes.

Figure 4-4 Rebuild DD/VO screen

0021J0 Rebuild DD/VO This procedure updates the Video/Report text which is associated with Data Dictionary data elements and does not have text overrides. It also updates the field descriptions in the Dream Writer Select and Sequencing records. Data Dict. Library (F9200) . . . Vocab. Ovr File Library(F9220) . Dream Writer File Library(F98301) _ Warning: This procedure should not be run when application users are signed on. All Videos and Reports will be impacted. ENTER - Update Video/Report/File Text F3=Exit w/o Update F24=More Keys

1. From the Rebuild DD/VO screen, enter the names of the libraries where your data dictionary, vocabulary overrides, and DREAM Writer files are located. The job submits to batch.

4.7 Only if You Use a Comma for the Decimal Character

If your system uses a comma (,) for the decimal character, complete the checklist items in Appendix D - Change Decimal Character. Otherwise, continue to the next checklist item.

Go to the Next Phase

Phase Five - Post Upgrade Tasks

This chapter contains these topics:

- Section 5.1, "Overview,"
- Section 5.2, "Access the Post Upgrade Menu,"
- Section 5.3, "Work with 'Z' Libraries,"
- Section 5.4, "Sign on as JDEINSTAL to Access the Software Upgrade Menu,"
- Section 5.5, "Print the Conversion Status Report,"
- Section 5.6, "Review the Upgrade Reports,"
- Section 5.7, "Sign off as JDEINSTAL,"
- Section 5.8, "Sign On as the Security Administrator User ID You Entered During the OUI Process,"
- Section 5.9, "End the JD Edwards World Monitor,"
- Section 5.10, "Test in the Alternate Environment,"
- Section 5.11, "Install A9.3 Update 1 to the Alternate Environment."

5.1 Overview

This phase shows what you must do to ready your alternate environment for use.

5.2 Access the Post Upgrade Menu

From any JD Edwards World menu, enter G97R4.

5.3 Work with 'Z' Libraries

The work libraries are named Library where library is the name of your common or production data library. You must display your 'Z' libraries. You must delete all empty 'Z' libraries.


Note: If a 'Z' library is not empty, an unresolved file conversion problem may exist. For assistance, call JD Edwards World Worldwide Customer Support.

1. From the Post Upgrade Menu (G97R4), select Utilities.

- 2. From the Upgrade Utilities menu (G97R42), select Work with 'Z' Libraries.
- In the Library field on the Work with 'Z' Libraries screen, enter Z*. The 'Z' libraries are listed.
- **4.** To view the contents of a library, enter a 5 (Display) in the Opt field next to the library name.
- If the library is empty, from the Work with 'Z' Libraries screen, enter 4 (Delete) in the option field next to the library.

5.4 Sign on as JDEINSTAL to Access the Software Upgrade Menu

Figure 5–1 Software Upgrade Menu screen

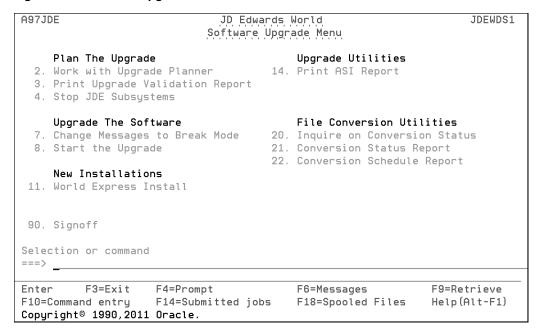

5.5 Print the Conversion Status Report

JD Edwards World recommends that you print this report for your records.

- 1. From the Software Upgrade Menu (A97JDE), select Conversion Status Report. The Version Selection screen appears for form ID P972612.
- **2.** In the O (Option) field next to version ZJDE0001, enter 3 (Add).
- Press Enter until the Data Selection screen appears.
- **4.** In the Value field for Plan Name, type the name of the upgrade plan that defines the environment for which you want to run the report.
- **5.** Press Enter until the Version Selection screen appears again.
- In the O (Option) field next to the version you created, enter 1 (Run).
- When the job finishes, print the report.

5.6 Review the Upgrade Reports

After you complete Phase Four, you can review the various reports the system produced. Sign on as JDEINSTAL and type WRKSBMJOB. You may print the reports found under UPG_STEP2 (ALT_STEP2 for GO LIVE).

5.7 Sign off as JDEINSTAL

5.8 Sign On as the Security Administrator User ID You Entered During the **OUI Process**

5.9 End the JD Edwards World Monitor

After you have completely upgraded, end the JD Edwards World monitor.

MULTI-PLANS: Do not end the JD Edwards World monitor until you have completely upgraded all alternate environments.

- From the Post Upgrade Menu (G97R4), select Utilities.
- From the Upgrade Utilities menu (G97R42), select End JD Edwards World Monitor.

5.10 Test in the Alternate Environment

Caution: JD Edwards World A9.3 is delivered in a "locked down" state, meaning that the default for all major security types is "NO ACCESS". Before users can begin using the A9.3 environment, YOU MUST TAKE ACTION. Access to most system resources must be specifically granted in the security setup. To get users up and running in the A9.3 test environment, you can set up security records that emulate the old program behavior of granting access by default. Usually this can be done by entering a record for user *PUBLIC which grants access to *ALL resources. Once you are familiar with how A9.3 security works, and you are ready to set up security appropriately, you should then add appropriate security records for individual users or groups and remove security records which grant *PUBLIC / *ALL (default) access.

Refer to the JD Edwards World Technical Foundation Guide the online helps for options 14 through 23 on menu G9401 and Doc ID 1460223.1.

For existing users who will access the A93 test environment and lower release environments, you will need to change their IBM profile to call J98INITA from the A93 alternate object library.

You can operate your alternate environment at release level A9.3. JD Edwards World recommends that you test the performance of the environment against your data files, and train your users at the new release. When you are satisfied with its performance,

you are ready to use it to upgrade your production environment, which is described in the next phase.

5.11 Install A9.3 Update 1 to the Alternate Environment

JD Edwards World recommends that you install A9.3 Update 1 followed by A9311 (Single Byte) or D9311 (Double Byte) to your alternate environment. You must include your JDFDATA on the Configuration screen when you install A9311 or D9311 as that is used in your GO LIVE process. A download is available for your production GO-LIVE upgrade to allow you to go from A7.3, A8.1, A9.1, or A9.2 directly to A9.3 Update 1. For more information, see Phase 6 of this guide.

You start with the Quick Install Guide for A9.3 Update 1.

Note: A9311 is the first Group Software Update for A9.3.1. You will install the Group Software Update that is generally available on the Update Center when you perform the A9.3 Upgrade.

Go to the Next Phase

Phase Six - Upgrade the Production Environment

This chapter contains these topics:

- Section 6.1, "Overview,"
- Section 6.2, "Pre-Upgrade Application and Technical Instructions for the A7.3, A8.1, A9.1, or A9.2 Production Environment,"
- Section 6.3, "Delete Files,"
- Section 6.4, "Sign on as JDEINSTAL to Access the Software Upgrade Menu,"
- Section 6.5, "Start the Upgrade and Track Progress,"
- Section 6.6, "Sign On as the Security Administrator User ID You Entered During the OUI Process,"
- Section 6.7, "Change the Security Administrator and JDE User Profiles,"
- Section 6.8, "Rename the Production JDF Libraries,"
- Section 6.9, "Rename the Alternate JDF Libraries,"
- Section 6.10, "Sign On to the Production Environment,"
- Section 6.11, "Start JD Edwards World Subsystems,"
- Section 6.12, "End the JD Edwards World Monitor,"
- Section 6.13, "Activate Triggers,"
- Section 6.14, "Update the Library Entries in Software Versions Repository,"
- Section 6.15, "User Profiles."

Note: Do not start this phase until you are satisfied with the performance of the upgraded alternate environment.

6.1 Overview

This phase details all steps needed to upgrade your production environment.

WARNING: These steps are ONLY for customers who upgraded an alternate environment from A7.3, A8.1, A91, or A9.2, to A9.3 and then installed A9.3 Update 1 and then either A9311 (Single Byte) or D9311 (Double Byte) to the alternate environment.

After you restore the install libraries using the Readme instructions included with the A931INS or A931INSD libraries, you MUST execute these commands in order to be able to sign on as the Security Administrator User ID in step 6.6.

- CRTDTAARA DTAARA(JDFINS/JDEINSSHLD) TYPE(*CHAR) LENGTH(1000)
- CHGDTAARA DTAARA (JDFINS/JDEINSSHLD (531 10)) VALUE('XXXX') where XXXX is the Security Administrator User ID You Entered During the OUI Process when you did your A9.3 Alternate Upgrade.

Download the A931INS (Single Byte) or A931INSD (Double Byte) Software Update from the Update Center and follow the special Install instructions included with the update. This update contains new install libraries (JDEINSTAL and JDFINS) that allows you to upgrade the A7.3, A8.1, A9.1, or A9.2 production libraries to A9.3 Update 1 plus A9311 or D9311 directly.

Note: A9311 is the first Group Software Update for A9.3.1. You installed the Group Software Update that was generally available on the Update Center when you performed the A9.3 Upgrade.

6.2 Pre-Upgrade Application and Technical Instructions for the A7.3, A8.1, A9.1, or A9.2 Production Environment

6.2.1 Payroll - A7.3 Customer

For release A9.3, for customers upgrading from A7.3, the upgrade process moves all user-defined codes and data dictionary items associated with the previous Payroll system (06) to the Enhanced Payroll system (07). Review customized User Defined Codes and Data Dictionary items as they will also be moved to system code 07.

Some A7.3 customers have an entry for User Defined Codes 07/BC, 07/DB, 07/DM, 07/GR, 07/PC, 07/PF, 07/PG, 07/SC, 07/SG 07/ST, or 07/WP. These values and the UDC Code Type (F5 from the UDC screen) need to be deleted in order to bring over the values correctly. If you have entries for any of these User-defined Codes, you must delete them now. Use option 3 on menu G90 to view User Defined Codes.

6.2.2 Run Integrity Reports

Run all standard integrity reports to ensure that all critical files are in balance before starting the upgrade.

6.2.3 Accounts Payable

The F04571, F04572, and F04573 files are cleared in your data library as part of the upgrade process. If you have open payment groups, you need to use the Undo key to remove payments that cannot be completed before the upgrade.

6.2.4 Contract Billing and Service Billing

All Invoice Generation and Journal Generation processes must be completed before starting the upgrade process. After you complete these processes, the F48910 and F48911 work files are empty.

6.2.5 Check for DDM Files

DDM files cannot exist in the data libraries. You need to convert for the upgrade to work successfully. Use the WRKDDMF command to check for DDM files. If any exist, delete the files using the DLTF command.

6.2.6 IBM Journaling

IBM Journaling must be turned off on files that are part of the upgrade plan before you start the A9.3 upgrade.

6.2.7 Database Audit Manager and Other Triggers

Deactivate Triggers in Database Audit Manager. Access G946 option 4 and verify if any files have the Status *ACTIVE, if yes, then enter a 5 in front of each file listed to turn the trigger off. If you have Option 7, Deactivate All Configurations, on menu G946, you can use this option.

Note: Triggers cannot be turned off or on if the file is locked.


To identify other triggers, use the PRTTRGPGM command to produce a report. Use the RMVPFTRG command to remove triggers from the files.

6.3 Delete Files

- DLTF FILE(dtalib/F74R0430L*) where dtalib is your data library
- DLTF FILE(dtalib/F74R0430).
- DLTF FILE(dtalib/F74R0433)
- CRTDUPOBJ OBJ(F74R0411) FROMLIB(dtalib) OBJTYPE(*FILE) TOLIB(templib) DATA(*YES)
- DLTF FILE(dtalib/F74R0411)

6.4 Sign on as JDEINSTAL to Access the Software Upgrade Menu

Figure 6-1 Software Upgrade Menu screen

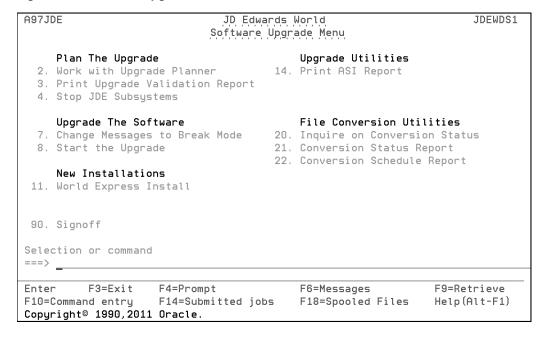


6.4.1 Set Up an Upgrade Plan for the Production Data Libraries

You must create an upgrade plan based on the one you used to upgrade the alternate environment. In addition to the setup instructions given for the upgrade planner in Phase One, follow these guidelines.

- Inquire on the upgrade plan you used to upgrade the alternate environment, and add a new plan to upgrade your production environment.
- Your Libraries for this plan screen should look similar to the one below, which is based on the ZJDE_ALT model. Change the library names for library types DTA, COM, and SEC to match the libraries in your production environment. For instance, type the name of the common library that is in your production environment in the Library Name field for library type COM. The library names may not be the same as the ones shown on the screen below. The JDF, OBJ, and SRC libraries for the plan are the A9.3 or A9.3 Update 1 libraries from your alternate environment.

Figure 6–2 Libraries for This Plan screen

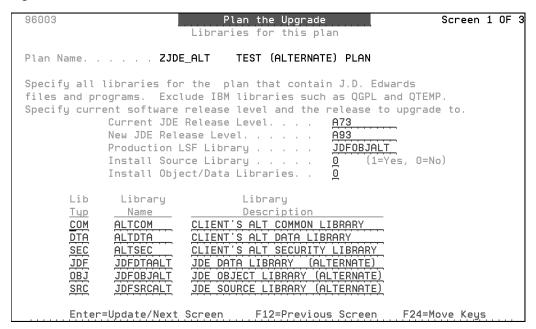

- The Install Source Library and Install Object/Data Libraries fields must be set to 0.
- On the Production LSF Library line, specify the OBJ library name from your plan (JDFOBJALT).

Note: If the Coded Character Set ID (CCSID) for your system value QCCSID is set to 65535, and if the CCSIDs associated with your data dictionary and DREAM Writer files do not match each other, the Reinstall Language Exception window appears. Enter the correct CCSID.

- Verify the library names on the Merge Information screen. JD Edwards World recommends that you do not change the merge modes.
- The Data Dictionary Field Ownership screen must be the same as your alternate environment report R96004.
- Run the Upgrade Planner Validation Report (R96004YR) to validate this upgrade plan. Be sure that your plan does not have errors or duplicate files before you continue to the next item. Use *ALT for the 4th processing option.

6.4.2 Stop JD Edwards World Subsystems

6.4.3 Sleeper (required)

- From the Software Upgrade Menu (A97JDE), select Stop JD Edwards World Subsystems.
- From the Stop JD Edwards World Subsystems menu, select Sleeper.

6.4.4 Order Processing (If Installed)

- 1. From the Stop JD Edwards World Subsystems menu (A97JDE2), select Order Processing (If Installed).
- Enter the name of your Order Processing subsystem, and repeat this step for each additional subsystem you may have.

6.4.5 Human Resources (If Installed)

- Be sure your Human Resources monitor has finished processing any history entries.
- After processing completes, from the Stop JD Edwards World Subsystems menu (A97JDE2), select Human Resources Management (if installed).
- 3. Enter the name of your Human Resources subsystem, and repeat this step for each additional subsystem you may have.

6.4.6 Back Up Libraries

Back up all libraries that appear in the upgrade plan for the production environment.

6.4.7 Be Sure Users are Not Accessing the Libraries You Want to Upgrade

Perform the following procedure for any common, production, object, and security libraries you want to upgrade.

- 1. On the command entry line, type WRKOBJLCK, then press F4 (Prompt). The Work with Object Locks screen appears.
- In the Object field, type the production data library name.
- **3.** In the Library field, type QSYS.
- In the Object Type field, enter *LIB.
- Repeat for each library you want to upgrade.

6.5 Start the Upgrade and Track Progress

6.5.1 Start the Upgrade

- 1. From the Software Upgrade Menu (A97JDE), enter DSPMSG JDEINSTAL to display messages issued during the upgrade process for the alternate environment.
- **2.** Press F13 to clear all of these messages.
- **3.** From the Software Upgrade Menu (A97 JDE), select Start the Upgrade.

Figure 6-3 JDE Upgrade Command screen

JDE Upgrade	Command	(JDEUPGRADE)
Type choices, press Enter.		
Upgrade Type		*PTF, *INSTALL, *REINSTALL From Upgrade Planner
Source Media	1	Device Name, *SAVF, *DISK From Upgrade Planner From Upgrade Planner 1=Yes, 0=No
F3=Exit F4=Prompt F5=Refresh F24=More keys	F12=Cand	Bottom cel F13=How to use this display

- In the Upgrade Type field, enter *ALT.
- In the Plan Name field, type the name of the upgrade plan that defines the environment you want to upgrade.

MULTI-PLANS: If you are upgrading more than one environment (multiple plans), enter a plus character (+) in the second Plan Name field, and then enter the additional plans in the fields provided.

- In the Source Media field, type *DISK.
- In the Current JD Edwards World Release Level field, type the current JD Edwards World software release level of the environment you want to upgrade.

This release level must match the current JD Edwards World release level specified in the upgrade plan.

- In the New JD Edwards World Release Level field, type A93.
 - This release level must match the new JD Edwards World release level specified in the upgrade plan.
- Leave the default values in the Run Validator Program and Hold Install Job on Job Queue fields.
- **10.** After you verify the information, press Enter.

The upgrade process, which has two steps, begins. Step 1 (ALT_STEP1) sets up work files. Step 2 (ALT_STEP2) converts files and runs control file merges in the production environment.

Note: If the reinstallation process encounters inconsistent code character set IDs (CCSIDs) in your files, it produces a report (CCSIDLIST) that lists your inconsistent files and their associated CCSIDs. This report is for your information only. The reinstallation process automatically changes the CCSIDs for these files and runs conversions on them. Keep this report in case you encounter problems with files that are listed on it when you use the production environment.

Note: Step 2 will halt if there are trigger programs attached to files in your production environment data libraries. A query report is produced listing the files with triggers attached. Use the RMVPFTRG command to remove the triggers. You may restart the Upgrade by typing *ALT for the Upgrade Type and *DISK for Source Media on the Start the Upgrade command.

After ALT_STEP2 completes, the upgrade process rebuilds the field reference files (FRFs) and the JD Edwards World message file automatically (job J98FRFGEN).

MULTI-PLANS: ALT_STEP1 builds the work files for all plans. A separate ALT_ STEP2 job performs file conversions and merges for each plan.

Note: The upgrade process produces job logs (QPJOBLOG) for ALT_ STEP1 and ALT_STEP2. Keep job log files (QPJOBLOG) in an output queue where they will not be deleted. They are extremely useful for resolving upgrade issues. The ALT_STEP1 job log shows what happened during the building of work files in the upgrade process. The ALT_STEP2 job logs show what happened during file conversions and merges.

6.5.2 Inquire on File Conversion Status

After the ALT_STEP1 and ALT_STEP2 jobs complete, check for file conversion problems as you did in Phase Two. When you inquire on file conversion status, specify the common and production data libraries that appear in the upgrade plan you used to upgrade your production environment.

MULTI-PLANS: You must inquire on file conversion status for each plan. Specify each plan name and the associated library name. Do not check file conversion status for an upgrade plan until the associated STEP2 job has finished. The message STEP 2 Completed for Plan name appears for each plan where name is the name of the plan.

6.5.3 Change the QJDF Data Area in JDFOBJALT

Use the CHGDTAARA command to change the QJDF in your alternate object library starting at position 181 to the name of the production library, which has your security files such as F0092.

CHGDTAARA DTAARA(JDFOBJALT/QJDF (181 10)) VALUE('XXXX')

where XXXX is the name of your production library containing your security files.

6.6 Sign On as the Security Administrator User ID You Entered During the **OUI Process**

6.6.1 Create New Files

See Section 3.5, "Create New Files." You must create new files in the common and data libraries in your production environment.

6.6.2 Update Your Applications

This section explains what you must do to update your JD Edwards World system applications in the production environment.

If you were able to monitor control file changes as described in Phase One, follow the guidelines in Control File Changes Monitored.

If you were not able to follow one of the methods for monitoring control file changes, follow the guidelines in Control Files Changes Not Monitored.

Control File Changes Monitored

If you monitored control file changes, you can copy most of the control files from the alternate common library (ALTCOM) to the common or data library in your production environment. If a file can be copied, you do not have to reapply manual changes.

The control files that can be copied are as follows:

Control File Type	Control File
Automatic Accounting Instructions	F0012
Menu	F0082, F00821, F0083, F009190, F009690, F009790
Data Dictionary	F9200, F9202, F9203, F9204, F9207, F9210, F9816, F98163
DREAM Writer	F98301, F98302, F98303, F9831, F98310, F98311, F98312, F9835, F9836, F98361, F9837
User Defined Codes	F0004, F0004D, F0005, F0005D
Software Versions Repository	F9801, F9802
Vocabulary Overrides	F9220, F9601, F9601D, F9611, F9620, F9621
World Writer	F8201, F8202, F82013, F82100, F82101, F82102, F82103, F82104, F82105, F82106, F82107, F82108, F82100E, F82109, F9401
	Note: World Writer and Automatic Accounting Instructions are not considered control files but are files that can be copied from the alternate environment if changes were monitored.

To copy files, sign on as JDEINSTAL and issue the CPYF command:

CPYF FROMFILE(ALTCOM/ctrlfile) TOFILE(PRODXXX/ctrlfile) MBROPT(*REPLACE) where ctrlfile is the control file name you want to copy. **Note:** The Next Number file (F0002) cannot be copied. You must apply the manual changes to the newly converted file in the common library of your production environment. Any A9.3 Special Instructions ASIs also need to be completed.

Note: If you use system 12 (Fixed Assets) or system 83 (FASTR), and if you will be copying DREAM Writer files, you must copy the following files also.

For system 12 - F12603 through F12609

For system 83 - F8303 through F8309

You must have used the dual maintenance method of monitoring DREAM Writer, FASTR, and STAR changes as described in Phase One. See the IMPORTANT NOTE in Section 1.1.5, "Monitor Changes to JD Edwards World Control Files."

Control File Changes not Monitored

If you cannot copy some or all of the control files, you must reapply manual changes to the files.

To apply the manual changes, sign on as the Security Administrator you entered during the OUI process.

Perform all the procedures in Phase Three, with the following guidelines:

- If you were unable to copy the Menu files, run the Menu Comparison Report, print the Menu Merge reports (R97883A, R97883B) and update menus if required.
- If you were unable to copy the User Defined Code (UDC) files, print, or view online the UDC report (R987241) and perform the manual changes.
- If you were unable to copy the Automatic Accounting Instruction (AAI) file, print the AAI report (R98727) and perform the manual changes.
- If you were unable to copy the Data Dictionary (DD) files and had some of the values on the Data Dictionary Field Ownership screen of the upgrade plan set to C, use the Data Dictionary workbench to apply changes.
- Print and perform the any ASIs pertaining to the control files you could not copy.

Note: Any ASIs for files that are not on the list to copy need to be performed. An example is Special Instructions ASIs.

Also, review the CRTDUPOBJ section of the ASI for UDC 97/NF.

- Review the DREAM Writer (DW) Review Workbench only if you were unable to copy the DW files.
- If you installed A9.3 Update 1, you must also perform the A9.3 Update 1 ASIs for files you were not able to copy in addition to the Special Instruction ASIs for A9.3 Update 1.

Copy Security Files

If you would like to copy the security setup from your A9.3 test environment, you may copy the following security files using the CPYF *REPLACE command:

- F00823 Advanced Menu Security
- F0003 Action Code Security
- F0003T Action Code Security Tag file
- F0103 Name Search Type Security
- F0024 Batch Approval/Post
- F9425 Report Writer Form Security
- F00168 Generic Text Security
- F9612 Function Key Security
- F00042 User Defined Code Security
- F00FP Fast Path Security
- F0001 Business Unit Security
- F0034 Company File Security

You will want to carefully look at each file before you copy the data from the test to the production library as you will be replacing production data.

Copy Role-Based Security Files

If you have set up Role-Based security in your A9.3 test environment, you may copy the following files from your A9.3 test security library to your A9.3 production security library using the CPYF *REPLACE command:

- F00926 Role
- F009261 Role/User
- F009262 Role/Group
- F009264 Role/Library List

6.6.3 Run Special Application Jobs, and Perform Post Upgrade Tasks, Upgrade Reports

Perform the procedures in Phase Four and Phase Five with the following guidelines:

WARNING: If you are upgrading from A8.1, A9.1, or A9.2, and you will use A9.3 Financials or Purchase Cards, you must ensure that the J0911QD2 job is run and completed normally before entering any data.

The job is on menus G97U22 (option 9), G97U25 (option 2), or G97U26 (option 4). Use the menu that corresponds to the upgrade you are performing. This job will left justify any of the 8 character Enhanced Subledgers for Enhanced Subledger Types A, E, O, W, L, I, or J that were entered in the G/L file (F0911) for release A8.1, A9.1 or A9.2 OR to the Purchase Card Transaction file (F01P111) for release A9.1 or A9.2.

If you have any questions, please contact the Oracle Support Services World Financials group.

When the instructions ask for an upgrade plan name, enter the one you used to upgrade your production environment.

- If you made manual changes in the data dictionary, using the Data Dictionary Workbench, run the Rebuild DD/VO from G97R6
- If you made manual changes on menus, run the Rebuild Menu Word Search.
- If you installed A9.3 Update 1 to the alternate environment, you must also run the Special Application Jobs on menu G97U01

Caution: If you copied the Fast Path Security file (F00FP), you do not need to run the Fast Path Security Conversion job (J00FPC) on the Technical Special Application Jobs menus. If you do, the *ALL value for each user will come from the Fast Path setting in the production F0092 file.

6.6.4 Change the JDEPROD Library List


- 1. From the System Administration menu (G944), select Library List Revisions.
- Inquire on the JDEPROD library list. The Description is JDE World A9.3 Production.
- Change the alternate object and source library names to the production object and source (if you installed source) library names.

6.6.5 Change the JD Edwards World System Values

From the System Administration menu (G944), select JDE System Values.

- After you read the message screen that appears, press F6 (Execute). The first JD Edwards World System Values screen appears.
- Verify that the alternate object library (JDFOBJALT) is in the QJDF Library Name field. Press Enter. The second JD Edwards World System. The Values screen appears.
- In the Source Library field, type the name of the source library in your production environment if you have source code.
- In the Object Library field, type the name of the object library in your production environment.
- In the User Profile Library (F0092) field, type the name of the security library in your production environment (where your F0092 file resides).
- In the Control File Library (F9200, F9220) field, type the name of the library in your production environment where your F9200 and F9220 files reside. Your screen must look similar to the following graphic:

Figure 6-4 JDE System Values screen

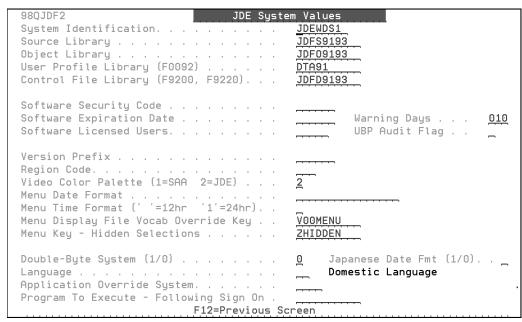

7. After you verify the information on this screen, press Enter and then F3 (Exit).

6.7 Change the Security Administrator and JDE User Profiles

You must change these profiles to call J98INITA from your production object library. From the command entry screen, enter the following command:

CHGUSRPRF USRPRF(XXX) INLPGM(JDFOBJ/J98INITA), where XXX is your Security Administrator profile.

CHGUSRPRF USRPRF(JDE) INLPGM(JDFOBJ/J98INITA)

6.8 Rename the Production JDF Libraries

You can rename the object, source, and JD Edwards World data libraries in your production environment, or delete them if you have a backup. To rename them, sign on as JDEINSTAL, then change the names of the following libraries.

JDFOBJ to JDFOBJX

JDFDATA to JDFDATAX

JDFSRC to JDFSRCX (if you have source)

where JDFOBJ is the name of the object library in your production environment, JDFDATA is the name of the JD Edwards World data library, JDFSRC is the name of the source library, and X is 73, 81, 91 or 92 depending on the release level of your production environment before the upgrade.

If you want to delete the old release libraries, enter DLTLIB library where library is the name of the library you want to delete from your machine.

6.9 Rename the Alternate JDF Libraries

Rename the alternate libraries so that they become your live production libraries.

JDFOBJALT to JDFOBJ

JDFDTAALT to JDFDATA

JDFSRCALT to JDFSRC (if you have source)

where IDFOBI is the name of the object library in your production environment, JDFDATA is the name of the JD Edwards World data library, and JDFSRC is the name of the source library.

6.10 Sign On to the Production Environment

Sign on as the Security Administrator user to verify that the rename of the libraries was successful. You are now ready to set up security and allow users into the JD Edwards World Software at the A9.3 or A9.3 Update 1 release level in a live production environment.

6.11 Start JD Edwards World Subsystems

6.11.1 Order Processing (If Installed)

- 1. From the Post Upgrade Menu (G97R4), select Start JD Edwards World Subsystems.
- 2. From the System Specific Startup menu, select Start Subsystem under ORDER PROCESSING.
- 3. Enter the name of your Order Processing subsystem, and repeat this step for each additional subsystem you may have.

6.11.2 Human Resources (If Installed)

- From the System Specific Startup menu (G97R7), select Start Subsystem & Monitor under HUMAN RESOURCES MANAGEMENT.
- Enter the name of your Human Resources subsystem, and repeat this step for each additional subsystem you may have.

6.11.3 Start the JD Edwards World Sleeper Subsystem

While signed on as the Security Administrator, start the sleeper subsystem.

6.12 End the JD Edwards World Monitor

After you completely upgrade your production environment, end the JD Edwards World monitor.

- 1. From the Post Upgrade Menu (G97R4), select Utilities.
- From the Upgrade Utilities menu (G97R42), select End JD Edwards World Monitor.

6.13 Activate Triggers

If you deactivated Database Audit Manager triggers prior to upgrading your production environment, use option 8 on menu G946 to activate those triggers. CALL PGM(JDFOBJ/J98206CV1) to convert the old Database Audit Manager triggers to the new Database Audit Manager named triggers. If you removed other triggers as a result of the PRTTRGPGM report or the query report produced by Step 2 of the upgrade, you can reattach those triggers to your files in the production environment. A9.3 is not coexistent with EnterpriseOne, only add back triggers needed to run A9.3 or A9.3 Update 1 software.

6.14 Update the Library Entries in Software Versions Repository

If you installed source, you need to get the library entries (F9802 file) for the Software Versions Repository screen updated to reflect your production library names. Refer to Doc ID 627330.1 on My Oracle Support for instructions to populate the F9802 file.

6.15 User Profiles

You will need to change the object library on the IBM profile to the production (A9.3) object library for all users who will need to access the A9.3 production environment and any earlier World release environments.

Control File Dependencies

This appendix contains the topic:

Section A.1, "Control File Sets."

Certain sets of control files must be maintained in the same library on your machine to avoid problems when using or upgrading JD Edwards World Software. In addition, Data Dictionary, Vocabulary Overrides/Function Keys, and User Defined Codes sets must be in the same library. The remaining sets of files can be in different libraries, but all files in a particular set must be in the same library.

A.1 Control File Sets

A.1.1 User Security

F0092 User Information

F0092T Library Lists User Tag

F00921 User Display Preferences

F00921T User Display Preference Tag

F0093 Library List Control

F0093T Library List Control Tag

F0094 Library List Master Files

F00944 Library List Master File - Additional Libraries

F00926 Role File

F009261 Role/User File

F009262 Role/Group File

F009264 Role/Library List File

A.1.2 DREAM Writer

F98301 DREAM Writer Master Parameter

F98302 DREAM Writer Processing Options (Language Preference)

F98303 DREAM Writer Version Headings (Language Preference)

F9831 DREAM Writer Values Parameter

F98310 DREAM Writer Values Parameter

F98311 DREAM Writer Headings File

F98312 DREAM Writer Printer Overrides

F81900 DREAM Writer Performance Statistics Master

F81901 DREAM Writer Statistics Detail

F81902 DREAM Writer Statistics Detail Accumulator

A.1.3 Data Dictionary

If you are currently at release A7.3:

F9200 Data Item Master

F9201 Data Field Specs

F9202 Data Field Display Text

F9203 Data Item Alpha Descriptions

F9204 Data Item Aliases

F9205 Data Dictionary - Error Message Program ID

F9206 Alternate User Defined Codes Tag File

F9816 Data Dictionary Generic Text File

F98163 Data Dictionary Generic Text Key Index File

If you currently are on release A8.1 or above:

F9200 Data Item Master

F9202 Data Field Display Text

F9203 Data Item Alpha Descriptions

F9204 Data Item Aliases

F9207 Data Dictionary - Error Message Information

F9210 Data Dictionary - OneWorld Attributes

F9816 Data Dictionary Generic Text File

F98163 Data Dictionary Generic Text Key Index File

A.1.4 Vocabulary Overrides/Function Keys

F9220 Screen/Report Text Master

F9601 Function Key Translation Master

F9601D Function Key Definitions - Alternate Language Descriptions

F9611 Function Key Translation Detail

F9620 Cursor Sensitive Control Master

F9621 Cursor Control Format Master Maintenance

A.1.5 User Defined Codes

F0004 User Defined Code Types

F0004D User Defined Code Types (Alternate Language Descriptions)

F0005 User Defined Codes

F0005D User Defined Codes (Alternate Language Descriptions)

A.1.6 Software Versions Repository

F9801 Software Versions Repository Master

F98012 SVR Member Category Codes

F98013 SVR Member Parm/Key List

F9802 Software Versions Repository Detail

A.1.7 Generic Message/Rates Files

F0019 Generic Message/Rates Types

F00191 Generic Message Rates

F00192 Generic Message Detail

A.1.8 Menu Files

F0082 Menu Master File

F00821 Menu Selections

F0083 Menu Text Overrides

F009190 Word Search Occurrences Master

F009690 Word Search Master

F009790 Word Search Verbs

A.1.9 Generic Text Files

F0016 Generic Text File

F00161 Generic Text Window Definition File

F00162 Generic Text Key Definition File

F00163 Generic Text Key Index File

F00164 Generic Text Key Index File (120 Character)

Upgrade Planner Screens

This appendix contains these topics:

- Section B.1, "Plan the Upgrade Screen,"
- Section B.2, "Libraries for this Plan Screen,"
- Section B.3, "Merge Information Screen,"
- Section B.4, "Printer Information Screen,"
- Section B.5, "Advanced Options Screen."

This appendix describes the upgrade planner screens and their fields.

B.1 Plan the Upgrade Screen

This screen lets you add or change an upgrade plan that the installation or upgrade process will use.

Figure B-1 Plan the Upgrade screen

```
960099
                                Plan the Upgrade
Action Code. . . <u>I</u>
Plan Name. . . ZJDE_ALT
Description. . TEST (ALTERNATE) PLAN
     Enter the name of a Plan.
     You can choose one of the following or copy them
     to create your own plan. Note that "ZJDE" Plans
     cannot be changed or deleted.
     We recommend you review the following:
                 ZJDE - Simple production plan
                 ZJDE_ALT - Alternate upgrade plan
                 ** Press F5 key to enter Upgrade Data **
                    F3=Exit
                                F5=Plan Data
```

To display a list of all available plans, move the cursor to the Plan Name field on the Plan the Upgrade screen, and press Fl. You cannot modify or delete the models (ZJDE-type plans).

Field	Explanation
Action Code	Specify the action you want to perform on an upgrade plan. Valid action codes are:
	A – Add
	C – Change
	D – Delete
	I – Inquire
Plan Name	Specify the name of an upgrade plan. To add a plan, see the instructions that follow this table. Do not prefix your new plan name with ZJDE or numbers.
Description	Specify a description for the plan.

To Add an Upgrade Plan


From the Plan the Upgrade screen, inquire on a ZJDE upgrade plan model provided by JD Edwards World.

- **1.** In the Action Code field, type A (Add).
- In the Plan Name field, type a name for the new upgrade plan.
- In the Description field, enter a description for the new upgrade plan.
- Inquire on the new upgrade plan.

B.2 Libraries for this Plan Screen

This screen lets you define environment information for the upgrade plan. It lets you specify the JD Edwards World libraries to which you want the software restored and the libraries that contain data files you want to convert.

Figure B–2 Libraries for This Plan screen

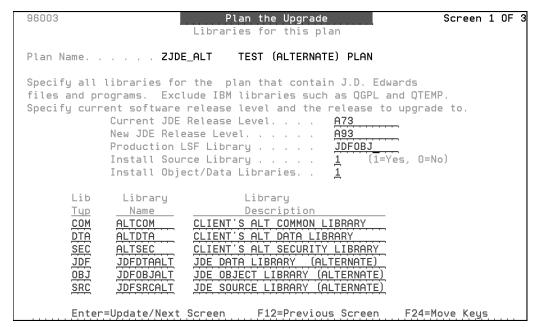

Field	Explanation
Current JD Edwards World Release Level	Specify the current JD Edwards World software release level of the environment you want to upgrade.
	Note: Do not type more than three characters in this field.
New JD Edwards World Release Level	Specify the JD Edwards World software release level to which you want to upgrade your environment (for example, A93).
Production LSF Library	Specify the Production Object library name containing the F99LSF file.
Install Source Library	Specify whether you want the JD Edwards World source code library (usually JDFSRC) restored. Valid values are:
	0 – Do not restore the source code library.
	1 – Restore the source code library.
Install Object/Data Libraries	Specify whether you want the JD Edwards World object and data libraries (usually JDFOBJ and JDFDATA) restored. Valid values are:
	0 – Do not restore the object and data libraries.
	1 – Restore the object and data libraries.
Lib Typ (Library Type)	Specify the type of library. Valid values are:
	COM – Common Library
	CSO – Custom Object
	CSS – Custom Source
	DTA – Client's Data Library
	JDF – JD Edwards World Data Library
	KBG – CASE Constants Library
	OBJ – JD Edwards World Object Library
	SEC – Security Library
	SRC – JD Edwards World Source Library
	Note: Do not create new library types, which will cause unpredictable results. In addition, do not specify more than one library for JDF, OBJ, SEC, and SRC library types.
	Data libraries contain JD Edwards World data files, such as Address Book. The common library holds JD Edwards World control files, such as menu and DREAM Writer files.

Field	Explanation
Library Name	Specify the name of a library for this environment.
multiple environments that have separate object li environment plan must have separate sets of secu- (F0092, F0093, F0094, and F0095). JD Edwards Wor recommends you set up SEC-type libraries (securi for these files. Note: If a library you specify in this field does not machine, the Create Plan Library screen appears a press Enter from the Libraries for This Plan screen of the Create Plan Library screen follows this table lets you verify the library name that appears on th for This Plan screen, but does not exist on your ma Enter to create the library, or press F3 to exit witho it. If the library name is not correct, enter a new na library name on the Libraries for This Plan screen	Note: If you are setting up your own upgrade plans for multiple environments that have separate object libraries, each environment plan must have separate sets of security files (F0092, F0093, F0094, and F0095). JD Edwards World recommends you set up SEC-type libraries (security libraries) for these files.
	Note: If a library you specify in this field does not exist on your machine, the Create Plan Library screen appears after you press Enter from the Libraries for This Plan screen. An example of the Create Plan Library screen follows this table. This screen lets you verify the library name that appears on the Libraries for This Plan screen, but does not exist on your machine. Press Enter to create the library, or press F3 to exit without creating it. If the library name is not correct, enter a new name. The library name on the Libraries for This Plan screen will be updated automatically.
Library Description	Specify a description for each library. For example, you could describe JDFDATA as JD Edwards World Data Library.

B.3 Merge Information Screen

The Merge Information screen lets you specify the modes in which the merges will run and indicate the library locations for the files to be merged.

Note: JD Edwards World recommends you do not change the default merge modes whether you are installing to new environments or upgrading existing ones.

The upgrade planner fills the Library Name fields with the default library names from the Libraries for This Plan screen. Be sure the library names represent the locations of the files and also appear on the Libraries for This Plan screen.

Figure B-3 Merge Information screen

96001E Plan the Upgrade Merge Information	Screen 2 Of 3
Plan Name ZJDE_ALT TEST (ALTERNATE) PLAN	
Specify Merge Modes And Library Names.	
0=No Merge, 2=Final, 3=Replace	<u>Library Name</u>
Data Dictionary Merge 2 Vocab. Overrides Merge 2 Dream Writer Merge	ALTCOM
F5=Printer Overrides F8=Advanced Options F12=Previous Screen	F24=More Keys

Field	Explanation
Data Dictionary Merge	Specify the mode in which you want the merge to run.
	In final mode, the merge adds new data items and updates fields in your existing data items, some of which are based on your values on the Data Dictionary field ownership screen of your upgrade plan. Display decimals are not changed. The merge also produces a report that lists updates made to your data items.
	0 – Do not run the merge (No Merge).
	2 – Run the merge and generate the reports (Final).
	3 – Run the language upgrade (Replace).
	This is valid for language upgrades only. For upgrade, it will run as 2 (Final).
	Note: To update the data dictionary glossary, see Section B.5, "Advanced Options Screen" in this appendix.
Data Dictionary Library Name	Specify the name of the production library that contains your Data Dictionary file (F9200).
Vocab. Overrides Merge	Specify the mode in which you want the merge to run.
· ·	In final mode, the merge adds new vocabulary override fields and records, deletes obsolete VTX fields, and updates text for existing records, but not VTX (video and report soft-coded text) fields that have a Y in the override field. The merge also produces two reports: one that lists updates made to your records and another that lists VTX fields not updated because each has a Y in the override field.
	0 – Do not run the merge (No Merge).
	2 – Run the merge and generate the reports (Final).
	3 – Run the language upgrade (Replace). This is valid for language upgrades only. For upgrades, it will run as 2 (Final).

Field	Explanation
Vocabulary Overrides Library Name	Specify the name of the production library that contains your Vocabulary Overrides file (F9220).
DREAM Writer Merge	Specify the mode in which you want the merge to run.
	In final mode, the merge adds new form IDs and their associated versions, replaces processing option text, adds new ZJDE and XJDE versions, replaces existing XJDE versions, and updates the open query file option fields if your fields are different than those in JDFDATA.
	For upgrades, the merge updates data selection, data sequencing, and processing options wherever it is possible, flags some items for your review, and does not produce a report.
	0 – Do not run the merge (No Merge).
	2 – Run the merge (Final).
	3 – Run the language upgrade (Replace). This is valid for language upgrades only. For upgrades, it will run as 2 (Final).
DREAM Writer Library Name	Specify the name of the production library that contains your DREAM Writer file (F98301).
Menu Master Merge	Specify the mode in which you want the merge to run.
	For upgrades:
	In final mode, the merge adds new menus and lists them on the Menu Additions Report.
	It may produce a Menu Merge Exceptions report, which lists new and obsolete programs and other menu conditions which may need to be reviewed.
	Options are removed from menus if the program is obsolete. Options are changed on a menu if there is a replacement program for the menu. The F9806 file controls this.
	New menu options are added to existing menus. If a slot is open, the new option is added there. If that selection is taken, then the menu merge starts with selection 24 and works backwards to add new options.
	The menu comparison is run as part of Phase 3 to provide the necessary information to complete the manual changes for menus. An option is available with the menu comparison to overlay 'G' menus from JDFDATA.
	0 – Do not run the merge (No Merge).
	2 – Update existing menus and generate the reports.
	3 – For language upgrades, replace all JD Edwards World menus.
Menu Master Library Name	Specify the name of the production library that contains your Menus file (F0082).


Field	Explanation
User Defined Codes Merge	Specify the mode in which you want the merge to run.
	In final mode, the merge adds new user defined code tables and their values for all system codes, and adds new user defined code values for existing tables located in system codes 84 through 99 and in system code 00, record type IO. It adds selected new values to existing tables. The merge also produces a report that lists updates made to your tables and codes.
	0 – Do not run the merge (No Merge).
	2 – Run the merge and generate the report (Final).
	3 – Run the language upgrade (Replace). This is valid for language upgrades only. For upgrades, it will run as 2 (Final).
	Note: To update the user defined code detail text, see Section B.5, "Advanced Options Screen" in this appendix.
User Defined Codes Library Name	Specify the name of the production library that contains your User Defined Codes files (F0004 and F0005).
Generic Message/Rates Merge	Specify the mode in which you want the merge to run. The merge operates the same as the user-defined codes merge except that it includes the free form text associated with the rate on the message.
	In final mode, the merge adds new user defined code tables and their values for all system codes, and adds new user defined code values for existing tables located in system codes 80 through 99. It does not add new values for existing tables located in system codes 00 through 79. The merge also produces a report that lists updates made to your tables and codes.
	0 – Do not run the merge (No Merge).
	2 – Run the merge and generate the report (Final).
Generic Message/Rates Library Name	Specify the name of the production library that contains your Generic Message/Rates files (F0019, F00191, and F00192).
Help Master Merge	Specify the mode in which you want the merge to run.
	This merge runs in replace mode only, which replaces changed help text and adds new help text. It does not replace your entire help file. The merge does not produce a report.
	0 – Do not run the merge (No Merge).
	3 – Run the merge in replace mode (Replace).
Help Master Library Name	Specify the name of the production library that contains your Help file (F98HELP).
Software Repository Merge	Specify the mode in which you want the merge to run.
	0 – Do not run the merge (No Merge).
	2 – Run the merge and generate the report (Final).
Software Repository Library Name	Specify the name of the production library that contains your Software Versions Repository files (F9801 and F9802).
Generic Text Keys Merge	Specify the mode in which you want the merge to run.
	The merge does not produce a report.
	0 – Do not run the merge (No Merge).
	2 – Run the merge (Final).

Field	Explanation
Gen. Text Applic. Key Files (Generic Text Application Key Files) Library Name	Specify the name of the library that contains your Generic Text Application Key files (F00161 and F00162). These files contain the key fields that are used on generic text windows (program P0016) to access the generic text. For example, F14 (Memo) on the User Defined Codes screen accesses the User Defined Code Detail window (a generic text window), which displays descriptive text about a specific user defined code. The three key fields displayed at the top of the window are defined in the Generic Text Application Key files. You cannot modify the information in these files.
Auto Acct Instructions	Specify the mode in which you want the merge to run.
(Automatic Accounting Instructions) Merge	In final mode, the merge adds new automatic accounting instructions (AAIs) with the exception of distribution AAIs. The merge also produces a report that lists the new AAIs.
	0 – Do not run the merge (No Merge).
	2 – Run the merge and generate the report (Final).
Auto Acct Instructions (Automatic Accounting Instructions) Library Name	Specify the name of the production library that contains your Automatic Accounting Instructions file (F0012).
Next Numbers Merge	Specify the mode in which you want the merge to run.
	In final mode, the merge adds new next numbers (index lines) for existing systems or new systems. The merge also produces a report that lists the new next numbers.
	0 – Do not run the merge (No Merge).
	2 – Run the merge and generate the report (Final).
Next Numbers Library Name	Specify the name of the production library that contains your Next Numbers file (F0002).

B.4 Printer Information Screen

This screen lets you override default values for the various printer attributes, such as form length, form type, and lines per inch, for the reports created during the upgrade process.

Figure B-4 Printer Information screen

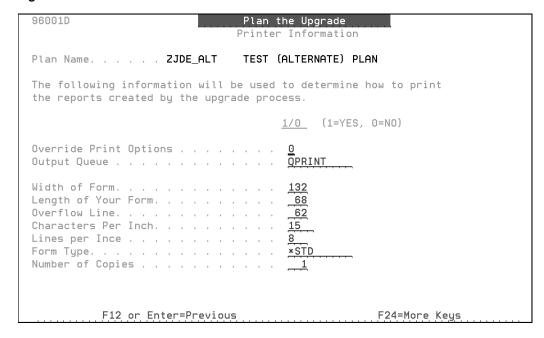

Field	Explanation
Override Print Options	Specify whether you want to override the default values for the printer file attributes, which determine how reports are printed. Valid values are:
	0 – Do not override printer file information.
	1 – Override printer file information.
Output Queue	Specify the name of the output queue to which you want reports sent. If the output queue does not exist, you must create it. Typically, the output queue is QPRINT. If no printer is assigned to the user's terminal, the default output queue will be used.
Width of Form	Specify the width of the form you will use to print reports. You must enter this value as the number of print positions per line in the range 1 to 378.
Length of Your Form	Specify the length of the form you will use to print reports. You must enter this value as the number of lines per page in the range 1 to 255.
Overflow Line	Specify when overflow to a new page should occur. Overflow occurs when the line you specify becomes the current line number, regardless of whether printing occurs on that line. You must enter this value as the number of lines per page in the range 1 to 255.
Characters per Inch	Specify the horizontal printing density of characters you want to use for reports. You must enter this value as characters per inch, and it must be supported by your printer.

Field	Explanation
Lines per Inch	Specify the line spacing you want to use for reports. You must enter this value as lines per inch, and it must be supported by your printer. Valid values are:
	4 – IBM 5219, 5224, 5225, and 3287 printers only.
	6 – IBM 5224 printer only.
	8 – IBM 5224 printer only.
	9 – IBM 5224 printer only.
Form Type	Specify the type of form you want to use for reports. You must enter a value that is supported by your printer. Valid values are:
	*STD The standard printer form used by your printer.
	Name The name of a special form type defined for your printer.
Number of Copies	Specify the number of copies you want printed for reports.

B.5 Advanced Options Screen


This screen lets you control several advanced upgrade functions, including:

- Hold on print queue option
- Control file conversion
- Data dictionary glossary update
- User defined codes detail text update

You can also indicate whether the environment you are upgrading is double byte.

Note: You may not need to change the values on this screen. Review the values to make sure the selections are appropriate for your upgrade plan.


Figure B-5 Advanced Options screen

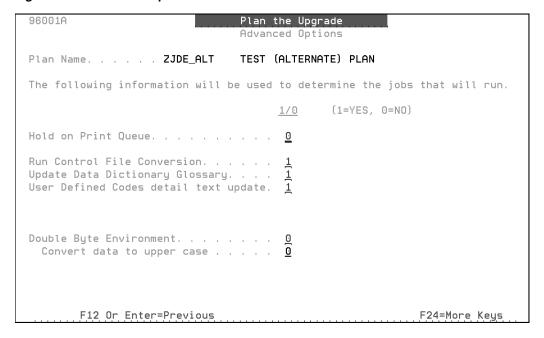

Combonation
Explanation
Specify whether to hold the print file in the print queue rather than printing it. Valid values are:
0 – Do not hold files on the print queue.
1 – Hold files on the print queue.
Specify whether control file conversion should run during the upgrade process. Leave this value set to 1 unless you are instructed otherwise. Valid values are:
0 – Do not run control file conversion.
1 – Run control file conversion.
Specify whether the data dictionary glossary should be updated during the upgrade process. If you have changed the glossary extensively in the past, you may not want to update it. However, because no report exists to show you the glossary differences between JDFDATA and your environment, no alternative exists to update your glossary. Glossary items cannot be selectively updated. Valid values are:
0 – Do not update the glossary.
1 – Update the glossary.
Specify whether the detailed text associated with user-defined codes (F9816 and F98163) should be updated during the upgrade process. Valid values are:
0 – Do not update the detailed text.
1 – Add new detailed text (does not affect existing text).
Specify whether the environment you are upgrading is double byte. Valid values are:
0 – Not double-byte environment.
1 – Double-byte environment.

Field	Explanation
Convert Data to Upper Case	Specify whether you want to convert all display data to uppercase characters for double-byte purposes. Valid values are:
	0 – Do not convert data to uppercase characters.
	1 – Convert data to uppercase characters.

Figure B-6 Data Dictionary Field Ownership screen

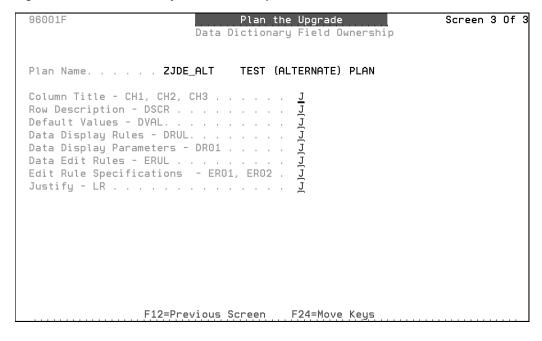

Field	Explanation
ALL	J – Override value for field from JDF type library during Data Dictionary merges.
	C – Retain Customer's value during Data Dictionary merges.

File Conversions

This appendix contains these topics:

- Section C.1, "Scheduler Conversions,"
- Section C.2, "Main Conversions,"
- Section C.3, "JDEINSTAL Subsystem,"
- Section C.4, "JDEINSTAL Job Queues,"
- Section C.5, "File Conversion Job Queues,"
- Section C.6, "Disk Utilization Work With Disk Status,"
- Section C.7, "CPU Utilization Work With System Status,"
- Section C.8, "Summary."

There are two types of conversions for A9.3:

- Scheduler Conversions
- Main File Conversions

C.1 Scheduler Conversions

There are two reasons for scheduler conversions.

- Program conversions where the data in the file needs to be manipulated.
- Data files that must convert first because the file is used in another conversion later in the process. A schedule is set up and delivered in the JDEINSTAL library that determines the order in which scheduler conversions run.

C.1.1 Scheduler Types

There are four types of scheduler conversions:

- 1. Control File Conversions (CTF) are for files that are the technical foundation of JD Edwards World software such as Data Dictionary and Menus. These conversions occur first in the process as other conversions and the control file merges are dependent on the files already being converted.
- **2.** Application Control File Conversions (ACF) are for files considered application control files such as Company Constants (F0010). Some other application conversion programs (BIG, LTL) are dependent on these files already being converted.

- 3. Large File Conversions (BIG) are for master and transaction files that contain large volumes of data. An example is the General Ledger File (F0911). Most of the large file conversions have been converted to SQL which considerably reduces the conversion time.
- Small File Conversions (LTL) are for secondary data files where the files generally contain small amounts of data.

C.2 Main Conversions

Main conversions are run for files where one of the following has changed and there is no scheduler record for the file:

- record format
- file keys
- select/omit criteria

These files do not require special processing of data; have no dependency on other files. Physical files, logical files that have key or select/omit criteria changes and join logical files with changes can run through the main conversion process.

Main file conversions use CHGPF which is considerably faster than CPYF which was used in previous upgrades.

As a default, the main conversions run as single threaded jobs. Batch job performance of file conversions is not an issue for most customers. However, if many of your files have millions of records, the following information may help you fine tune the main conversion process.

Many articles, etc. have been written through the years about machine tuning to optimize batch performance and throughput. Experts and distinguished IBM engineers, such as Rick Turner and Dick Bains, and folks in the IBM Teraplex Center make careers from just this one topic. The articles, discussions, and range of performance monitoring tools are aimed at data collection, analysis, and reconfiguring machine resources to optimize batch performance for repeatable jobs on a specific machine configuration. A software upgrade (control file merges and database conversions) presents a different perspective to the performance discussion because it is a one time job, expected to run across the full range of machine models, configurations, and over databases ranging from minimal in size, to those that exceed terabytes.

Within that context, every plausible question regarding performance factors of an upgrade can be answered with - it depends. This paper explains the subsystem definition, job queues, and methodology of file conversion execution, and one adjustable factor you can make determined by a couple observations.

C.3 JDEINSTAL Subsystem

The JDEINSTAL library contains the work management components, subsystem, job queues, job descriptions, etc. used by the batch drivers, and individual file conversion drivers during an upgrade. The definition and activity levels of the components are depicted here.

JDEINSTAL Subsystem

Maximum Active Jobs in subsystem - 20

Storage Pool ID: 1

Storage Size: *BASE

JdeMonitor Job

Step-1/2 Drivers					
MaxAct-1					
Each Step-2 job loads up the file conversion job queues.	"Big" File Conversions MaxAct-1	"Little" File Conversions MaxAct-3	"Main" File Conversions MaxAct-1	Logical File Conversions MaxAct-6	Join File Conversions MaxAct-3
JDEINSTAL	JDEBIGQ	JDELTLQ	JDEFILCNV	JDECRTLF	JDECRTJLF
Step-1 Job	BigFile1	LtlFile1	MainFile1	LglFile1	JoinFile1
Step-2 Job	BigFile2	LtlFile2	MainFile2	LglFile2	JoinFile2
Step-2 Job	BigFile3	LtlFile3	MainFile3	LglFile3	JoinFile3
	END_BIGS	LtlFile4	MainFile4	LglFile4	JoinFile4
	BigFile1	END_LTLS	MainFile5	LglFile5	END_JOINS
	BigFile2	LtlFile1	MainFile6	LglFile6	JoinFile1
	BigFile3	LtlFile2	END_MAINS	LglFile7	JoinFile2
	END_BIGS	LtlFile3	MainFile1	LglFile8	JoinFile3
		LtlFile4	MainFile2		JoinFile4
		END_LTLS	MainFile3		END_JOINS
			MainFile4		
			MainFile5		
			MainFile6		
			END_MAINS		

The maximum activity level for the subsystem is 20 jobs. The subsystem contains six job queues. The JDEMONITOR job is always running throughout the upgrade process and is submitted through the JDEINSTAL job queue. It is the message dispatcher for various parts of the Step-1 and Step-2 batch jobs, as well as the message handler for all the various file conversion drivers, and also updates the final conversion status for each spawned conversion job. It is not a controller or sequencer, but only a message dispatcher.

C.4 JDEINSTAL Job Queues

The JDEINSTAL job queue is also where the Step-1 and Step-2 drivers are submitted. The other job queues run the file conversions.

C.5 File Conversion Job Queues

Job queues JDEBIGQ, JDELTLQ, and JDEFILCNV are referred to as the "data pumps" they convert the physical structure of the physical files. JDEBIGQ and JDELTLQ run scheduler conversion jobs which normally manipulate the files data as part of the file

conversion process. Job queue JDEFILCNV is where physical files are converted that require no additional data manipulation or processing.

Job queue JDECRTLF rebuilds any changed logical files (indexes) after the physical file has been processed, and job queue JDECRTJLF is held until the data pump queues have completed all conversions for the current Step-2 job. The END xxxx are the final jobs in the data pump queues and when all three indicate completion, the JDECRTJLF job queue is released. Join logical file rebuilds begin and when its END_xxxx comes active, holds the job queue. This provides the needed boundary control for multi-plan upgrades. It also performs a look ahead at the next plan to determine if all three data pumps have completed or not. If not, the queue is held, is the next Step-2 job has completed all physical file conversions, the JDECRTJLF continues processing join rebuilds for the next environment.

The JDEFILCNV job queue can be increased to run multiple conversions simultaneously depending upon available system resources.

The rule of thumb is one for each CPU, or until disk utilization and activity levels are achieved as described below.

C.6 Disk Utilization - Work With Disk Status

The data pumps use little CPU as file conversions, while using system memory, are mostly I/O intensive. The command WRKDSKSTS shows statistics on disk activity. Observe the "%busy" column. Maximum disk arm utilization is achieved around 40%. The recommendation is to achieve a level close to 30% over an elapsed time of around 30 seconds. Use F10 to restart the statistics use F5 to refresh the display until you reach an elapsed time of 30 seconds.

Elaps	ed time	e: 00:0	0:00	Work	with Disk	Status		12/2		DEWDS1 08:01:39
Unit 1 2 3 4 5	Type 433C 433C 433C 433C 433C	Size (M) 111669 111669 111669 111669	% Used 68.9 65.0 65.0 65.0	I/O Rqs .0 .0 .0	Request Size (K) .0 .0 .0 .0 .0	Read Rqs . 0 . 0 . 0 . 0	Write Rqs .0 .0 .0 .0	Read (K) .0 .0 .0	Write (K) .0 .0 .0 .0 .0	% Busy 0 0 0 0
Comma ===> F3=Ex	_	5=Refresh	F12=	-Cancel	F24=Mor	e keys				Bottom

Note: This display is just representation of the Disk Status Panel and is not a representative example of actual system activity.

If the %busy column is low, you can increase the activity level of the "MAIN" conversion job queue and allowing more conversion jobs to run. Use the following command to do so:

CHGJOBQE SBSD(JDFINS/JDEINSTAL) JOBQ(JDFINS/JDEFILCNV) MAXACT(2)

Increasing the activity level for the job queue will allow additional conversion jobs to run simultaneously. Increment in small graduations, and continue checking the disk activity as stated above.

It important to note that the maximum active jobs allowed in the subsystem is configured at 20. This translates into a maximum activity level for job queue JDEFILCNV to 8, after all Step-2 jobs have completed. (job queue JDEINSTAL is

C.7 CPU Utilization - Work With System Status

The command WRKSYSSTS shows a range of statistical information on CPU utilization, DASD, memory pool sizes, system activity and page faults. If you are knowledgeable, and comfortable with machine tuning you can adjust memory storage pool sizes and allocate more memory to *BASE.

			Work wit	th Syste	m Statu	ıs			JDEWDS1
				_			12/	27/11	08:02:3
% CPU u	sed	:		.1 A	uxiliar	y stora	ae:		
						ASP .	_		558.3
			_			em ASP			
	_		1934 % syst						
% temp	addresses	:	. 0	135					
					Maximu	ım unpro	tect .	. :	3876
Pool 1 2	Size (M) - 403.45 - 584.64 - 20.29	Reserved Size (M) 134.49 2.96 .00	Active +++++ 110 7	Fault .0 .0	Pages . 0 . 0 . 0	Fault .9 .0	Pages .9 .0		
Command									Botto
		pt F5=Re	fresh	F9=Retr	ieve	F10=Res	tart	F12=Ca	incel
		em status							

Remember that four conversion "programs" could be active at any point in time, one from job queue JDEBIGQ and three from job queue JDELTLQ. All remaining activity will be system commands (CHGPF/CPYF) and index rebuilds (CRTLF). Although each CHGPF/CPYF and index build job has a driver program, the resources of those drivers are minimal - as is the overhead of the JDEMONITOR itself.

C.8 Summary

In summary, when migrating large amounts of data, the bottleneck will be disk speed and utilization. So throwing more memory at the process may result in little if any gain at all, unless your batch pools are already undersized.

Performance tuning is an art geared toward maximizing job throughput on a machine with fixed, known resources. The upgrade batch jobs must run on all System i models comprised of unlimited variations of memory, DASD, etc. and resource allocations. Therefore, the assumptions and configurations we make are conservative.

Change Decimal Character

This appendix contains the topic:

Section D.1, "Change the Decimal Character for the Category Table of Contents."

These checklist items show what you must do to change the decimal character used in the Category Table of Contents to a comma character.

Note: The user signon you use for the following procedure must have command entry authority.

D.1 Change the Decimal Character for the Category Table of Contents

- In the Selection field at the bottom of your screen, enter DSPSYSVAL QDECFMT. This displays your system's decimal format. If your format is 2, 3, I, or J, your system uses a comma for the decimal character.
- After you determine the decimal character your system uses, exit this screen.
- If your system does not use the comma, skip the following steps. Continue to the next checklist item.
- From the Post Upgrade Menu (G97R4), select Control File Updates.
- From the Control File Updates menu, select Data Dictionary Items. The Data Dictionary Items screen appears.
- In the Data Item field, inquire on HELP100A. The Data Item Glossary Revisions screen appears.
- In the Action Code field, type C.
- In the series of numbers displayed as 1.1, 1.2, 1.3, and so on, replace the decimal point (.) with a comma (,). Return to where you left off in Phase Four.

Index

<u>A</u>	<u>r</u>
Accounts Payable, 6-3 ASI apply ASIs, 3-17 Work with Application Specific Instructions, 3-18	file Automatic Accounting Instruction (AAI) files, 3-13 control file changes, 1-4, 6-9
Automatic Accounting Instruction (AAI) files, 3-13	control file dependency, 1-3 conversion status, 6-8 create new, 3-3
changes, 1-4 comma used for decimal character, 4-5 control file changes, 1-4, 6-9 conversion, B-10 dependencies, 1-3 monitor changes to, 1-3	Data Dictionary Files, 3-15 DDM Files, 6-3 duplicates, 1-3, 2-10 Inquire on File Conversion Status, 2-13 optional, 3-6 security files, 6-10
sets, A-1 conversions main, C-2 scheduler, C-1	history install history, 3-2
D	IBM Journaling, 6-3 instructions, 1-5
Data Dictionary Field, 2-7 glossary update, B-10 Workbench, 3-15 Database Audit Manager, 6-3 decimal character changing for the category table of contents, D-1 comma used for, 4-5 disk space, 1-3 DREAM Writer Review Workbench, 3-21 Workbench, 3-17	L libraries, 1-3, 2-4, B-2 Alternate JDF Libraries, 6-13 alternate object library, 3-1 JDEPROD library list, 3-2 multiple Post Upgrade Menu (G97R4), 3-4 new object library, 3-2 production data libraries upgrade plan, 6-4 Production JDF Libraries, 6-13 Update the Library Entries in Software Versions Repository, 6-15 Z libraries, 5-1
environment alternate, 4-4, 5-3	М
production, 6-1 set up, 1-3, 2-1	menu Post Upgrade Menu, 4-1, 5-1 Post Upgrade Menu (G97R4), 3-4, 4-2 Software Upgrade Menu, 5-2

```
update menus, 3-9
  Upgrade Utilities menu, 3-2
messages, 2-11
  possible messages, 3-9
monitor
  JD Edwards World Monitor, 5-3
pre-upgrade instructions, 1-5
printer, 2-6
  print queue option, B-10
  Printer Information Screen, B-8
R
report
  ASI Report, 3-17
     print, 3-17
  Conversion Status Report, 5-2
  Duplicate Files Found Report, 2-10
  Integrity Reports, 6-2
  Menu Comparison Report, 3-6
  New Automatic Accounting Instruction (AAI)
       report, 3-8
  Print Menu report, 3-8
  upgrade reports, 5-3
  User Defined Code Merge Report, 3-12
  User Defined Code report, 3-8
  validation report, 2-8, 2-9
S
Security Administrator, 3-2, 4-1, 6-9, 6-13
T
triggers, 4-4, 6-3
  activate, 6-14
UDC. see User-defined Code
upgrade
  instructions, 1-5
  Post Upgrade Tasks, 6-11
  pre-upgrade instructions, 1-5
  Upgrade Plan, 2-2
  Upgrade Utilities menu, 3-2
User Profiles, 6-15
User-defined Code, 6-2
  update user defined code files, 3-12
User-defined Codes
  detail text update, B-10
```