# Oracle® Communications EAGLE Element Management System Reporting Studio

Install/Upgrade Procedure Release 45.0 909-2301-001 Revision C

July 2014



Oracle Communications EAGLE Element Management System Reporting Studio Install/Upgrade Procedure, Release 45.0

Copyright © 2013, 2014, Oracle and/or its affiliates. All rights reserved.

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle America, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

CAUTION: Use only the guide downloaded from the Oracle Technology Network (OTN) (<a href="http://www.oracle.com/technetwork/indexes/documentation/oracle-comms-tekelec-2136003.html">http://www.oracle.com/technetwork/indexes/documentation/oracle-comms-tekelec-2136003.html</a>). Before upgrading your system, access the My Oracle Support web portal (<a href="https://support.oracle.com">https://support.oracle.com</a>) and review any Knowledge Alerts that may be related to the System Health Check or the Upgrade.

Before beginning this procedure, contact My Oracle Support and inform them of your upgrade plans. Refer to Appendix A for instructions on accessing My Oracle Support.

# **TABLE OF CONTENTS**

1.0	INTRODUCTION	4		
1.1	Purpose and Scope	4		
1.2	ACRONYMS AND TERMINOLOGY	4		
2.0	INSTALLATION OF I-NET CLEAR REPORTS	5		
Inst	FALLATION STEPS	5		
3.0	STARTING I–NET CLEAR REPORTS SERVER	9		
4.0	CONFIGURATION OF I-NET CLEAR REPORTS	10		
5.0	STOPPING I-NET CLEAR REPORTS SERVER	26		
6.0	UNINSTALLATION OF I-NET CLEAR REPORTS	27		
APPE	NDIX A: MY ORACLE SUPPORT	36		
l ¦a.	t of Tables			
LIS	t of Tables			
Table	1: Acronyms and Terminology	4		
Lis	t of Figures			
Figure	Figure 1: i-net Clear Reports Welcome Page			
Figure	Figure 2: User Login Screen			
Figure	igure 3: Remote Interface Screen			
Figure	Figure 4: System Permissions Screen - Users			
Figure	figure 5: System Permissions Screen - Add 'root' user			
Figure	Figure 6: System Permissions Screen - Add 'root' user - Done			
Figure	Figure 7: Repository Screen - Click folder icon			
Figure	Figure 8: Repository Screen – Browse to repository path			
Figure	Figure 9: Repository Screen – Add the repository path			
Figure	gure 10: Repository Screen – Activate the repository			
Figure	igure 11: Activating Scheduler module			
Figure	gure 12: Adding E5ms Filter			
Figure	ure 13: Setting Login Type			
Figure	igure 14: Adding E5-MS database as datasource			
Figure	Figure 15: Adding E5-MS database - Select driver			
Figure	igure 16: Adding E5-MS database - Done			

# 1.0 INTRODUCTION

# 1.1 Purpose and Scope

The scope of this document is to describe the installation and configuration of i-net Clear Reports.

# 1.2 Acronyms and Terminology

**Table 1: Acronyms and Terminology** 

TERM	DESCRIPTION
Ad Hoc Reporting	Creating reports on the fly without any predefined template.
Configuration	Managing i-net Clear Reports configurations. A configuration contains all options to configure i-net Clear Reports.
Data Source Configuration	Configuring the data sources to be used for report generation.
E5-MS Reporting Studio	Term used for all the reporting features accessible from E5-MS
Report Designer	An interface for designing and editing report templates files.
Repository	Directory containing existing reporting templates
Schedule	Scheduling report templates to generate reports at desired tine.
Template	i-net Clear Reports template (.rpt format) for creating report.

#### 2.0 INSTALLATION OF I-NET CLEAR REPORTS

i-net Clear Reports Multi Platform installation zip shall be used for installation. A valid license for the same should be ready before proceeding with installation.

# **Installation Steps**

The steps for installation of i-net Clear Reports as 'Standalone Server' are given below. The steps should be performed by 'root' or a system admin user. Complete installation shall take about 10-15 minutes.

- 1. Copy the i-net Clear Reports Multi Platform installation zip to an appropriate directory of the server where E5-MS is installed.
- 2. Being in the directory where i-net Clear Reports installation zip has been placed, unzip the same using the command given below –

```
# unzip <i-net Clear Report.zip> -d clear-reports
```

```
[root@e5ms7 Downloads] # unzip clear-reports-12.1.218.zip -d clear-reports
Archive: clear-reports-12.1.218.zip
 inflating: clear-reports/readme.html
 inflating: clear-reports/setup.bat
 inflating: clear-reports/setup.sh
 inflating: clear-reports/setup.jar
  creating: clear-reports/lib/
  creating: clear-reports/lib/exe/
  creating: clear-reports/lib/tpl/
  creating: clear-reports/lib/tpl/clearreports-setup/
  creating: clear-reports/lib/tpl/clearreports-setup/images/
 inflating: clear-reports/lib/exe/css.php.s.print.t.clearreports-setup.css
 inflating: clear-reports/lib/exe/css.php.t.clearreports-setup.css
 inflating: clear-reports/lib/tpl/clearreports-setup/images/background-bottom-light.jpg
 inflating: clear-reports/lib/tpl/clearreports-setup/images/bullet.gif
 inflating: clear-reports/lib/tpl/clearreports-setup/images/favicon.ico
 inflating: clear-reports/lib/tpl/clearreports-setup/images/logo.png
```

3. cd to the clear-reports directory –

# cd clear-reports

```
drwxr-xr-x. 4 root root 4096 Feb 24 02:43 lib

-rwxrwxrwx. 1 root root 5311 Feb 24 02:43 readme.html

-rw-r--r-. 1 root root 575 Feb 24 02:43 setup.bat

-rw-r--r-. 1 root root 100652660 Feb 24 02:44 setup.jar

-rwxr-xr-x. 1 root root 608 Feb 24 02:43 setup.sh
```

4. Execute the installer script using the command given below -

```
# java -Djava.awt.headless=true -jar setup.jar
```

5. Provide input 1 as shown below to accept the terms of the i-net license agreement -

```
A© Copyright 1996 - 2012, i-net software; All Rights Reserved.

1 - I accept the terms of this license agreement.

2 - I do not accept the terms of this license agreement.

Please select : 1
```

6. Provide input 2 as shown below to choose the "as Daemon (System)" option -

```
Select an installation environment

1 - Standalone Server

2 - as Daemon (System)

3 - IBM WebSphere 7.0 and higher

4 - Oracle WebLogic Server

5 - Apache Tomcat

6 - Apache with PHP (System)

7 - Jetty Webserver 6 and higher

8 - JBoss Application Server 4 and higher

9 - GlassFish Application Server

10 - Generic Servlet

Please select (2): 2
```

7. Press Enter to proceed with the default installation directory.

```
Select a path to install
------
Installation Path (/usr/local/i-net Clear Reports) :
```

8. Provide input 1 as shown below for creating a new configuration -

```
Create Configuration

1 - Create a new configuration

Please select (1): 1
```

9. Provide input 1 as shown below to set Scope as 'System' -

```
Scope :
1 - System
Please select(1): 1
```

10. Press Enter to accept Default configuration name and proceed.

```
Name of the new configuration (Default) :
```

11. Provide input 1 as shown below to select Default Configuration -

```
1 - Default Configuration
2 - Copy from a local Configuration
3 - Import crystalclear.properties
Please select (1): 1
```

12. Provide input 1 as shown below to proceed with Existing License -

```
License for i-net Clear Reports.

1 - Existing License
2 - Trial License
3 - Plus Trial License
Please select (3): 1
```

13. Provide a valid license key -

```
License Key: : 0AF809-22F1-B3D151-CF01C3-0412
```

14. Press Enter to accept default Port –

```
Advanced Settings
------
TCP/IP Port (9000) :
```

15. Provide inputs Y as shown below to activate the remote interface and Ad-Hoc Reporting -

```
Advanced Settings

TCP/IP Port (9000) : 2057

Activate remote interface (Y/n): Y

Activate Ad-Hoc Reporting (Y/n): Y
```

16. Provide input 3 as shown below to choose login type Master Password, then provide a suitable password value (must have 8 characters or more) as desired –

```
Login Type:
1 - Automatic
2 - External Webserver
3 - Master Password
Please select(1): 3
Master password: e5msreporting
Confirm password: e5msreporting
```


**Note**: Master password login shall be used in initial configuration of i-net Clear Reports. Logging in using the Master Password, a user gets the privilege of an admin. It is highly recommended that only system admin has access to this password and it is used as the fall back mechanism in case no others users can login to i-net Clear Reports from E5-MS. The normal E5-MS users shall always use the single sign on provided from E5-MS to login to i-net Clear Reports.

17. Press Enter to proceed with installation -

```
IP Filter
Enter which IP addresses are to be allowed access to the remote interface.
Enter individual addresses or address ranges, comma-separated.
Example: 192.168.1.2, 192.168.1.5-10

Filter:
```

18. Wait for the installation to complete -

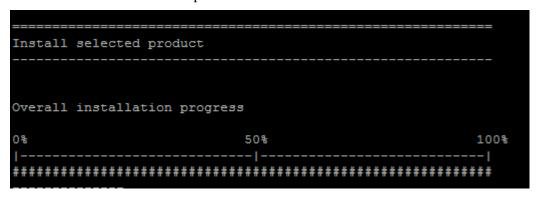

19. Provide input 'n' to decline the below request -

```
Data for statistical analysis

Enter 'y' to send brief and anonymous information about which components were selected. This will help i-net software to improve the flow of the setup tool and to focus on components customers really need. No private information such as setup paths or names will be sent. (Y/n): n
```

20. Copy the E5msFilter jar and NmsServerClasses.jar into the lib folder inside i-net Clear Reports installation directory (/usr/local/i-net Clear Reports/lib).

```
cp E5msFilter-45.0.0-1.0.jar /usr/local/i-net\ Clear\ Reports/lib/
cp NmsServerClasses.jar /usr/local/i-net\ Clear\ Reports/lib/
```

21. Now the server will already be running as daemon. Restart the server once to load the E5msFilter.jar & NmsServerClasses.jar in server space.

### 3.0 STARTING I-NET CLEAR REPORTS SERVER

After successful installation, following steps should be performed by 'root' or a system admin user to start i-net Clear Reports server –

1. cd to the i-net Clear Reports installation directory –

```
# cd /usr/local/i-net\ Clear\ Reports/
```

2. Start i-net Clear Reports server by using following command –

```
# sh startListener.sh
```

i-net server shall start listening to the preconfigured port 9000 and it can now be used -

```
[root@e5ms5 i-net Clear Reports] # sh startListener.sh

Starting i-net Clear Reports Standalone Server [ OK ]

./Listener.sh: line 36: log_end_msg: command not found
[root@e5ms5 i-net Clear Reports] # [Config,STATUS, 4/2 23:17:23, #00001] setting configuration from system proper
ty: user/Default
[Config,STATUS, 4/2 23:17:23, #00001] Setting current configuration to: User/Default
[Config,STATUS, 4/2 23:17:23, #00001] Setting current configuration to: User/Default
[CC,STATUS, 4/2 23:17:34, #00001] Waiting for client requests on port 9000.
[root@e5ms5 i-net Clear Reports] # [
```

#### 4.0 CONFIGURATION OF I-NET CLEAR REPORTS

After successful installation and startup of i-net Clear Reports server, following steps needs to be performed to configure it so that it is ready to be used with E5-MS. Note that E5-MS server should be running while i-net Clear Reports is being configured.

1. Open URL http://<IPAddress\_of\_Server>:9000 for i-net Clear Reports in a browser window. It shall open i-net Clear Reports Welcome page as shown below.



Figure 1: i-net Clear Reports Welcome Page

1. Click on the 'Open the Remote Interface' link (circled above). It shall open a User Login prompt as shown below. Provide the Master Password created during installation (step 16 above).

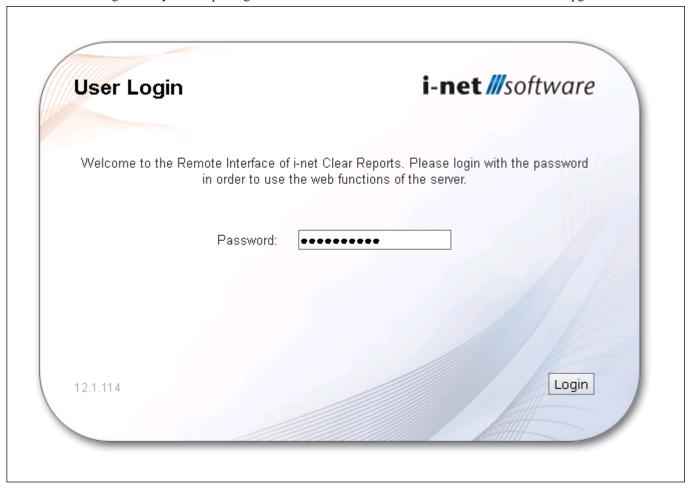


Figure 2: User Login Screen

On successful login, the Remote Interface screen shall be shown which will show all the remote interfaces available.



Figure 3: Remote Interface Screen

## 2. Creation of 'root' user and assigning permissions –

In correspondence to the default admin 'root' in E5-MS, a user named 'root' needs to be created in i-net Clear Reports so that E5-MS 'root' user can login to i-net Clear Reports from E5-MS. For this, perform following steps -

Click on the 'System Permissions' option in the Security section. It shall open the 'System Permissions' screen

On the 'System Permissions' screen, click 'Toggle view' button in left pane. It shall open the Users pane as shown below -

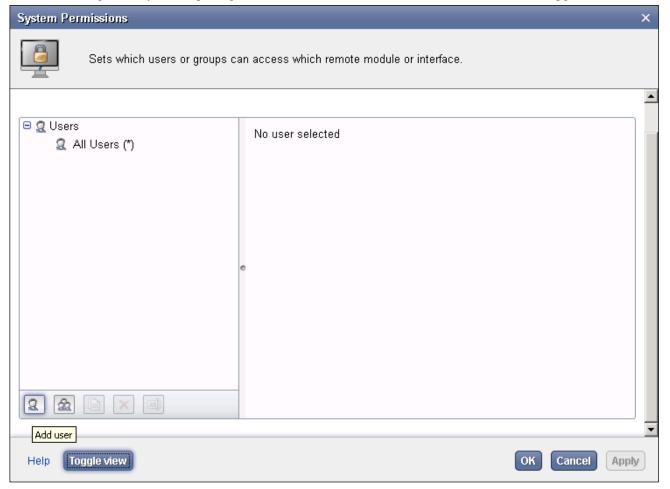


Figure 4: System Permissions Screen - Users

Click on the 'Add user' button in left pane, provide name 'root' and add all the modules given in 'Remote Modules' section and 'Remote Designer incl. WebDAV' and 'Remote Data Sources' in the 'Interfaces' section, then click Apply and OK.

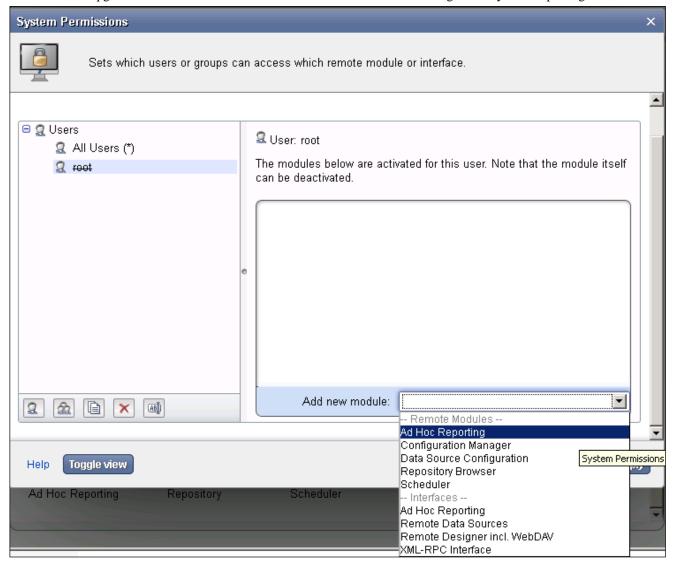


Figure 5: System Permissions Screen - Add 'root' user

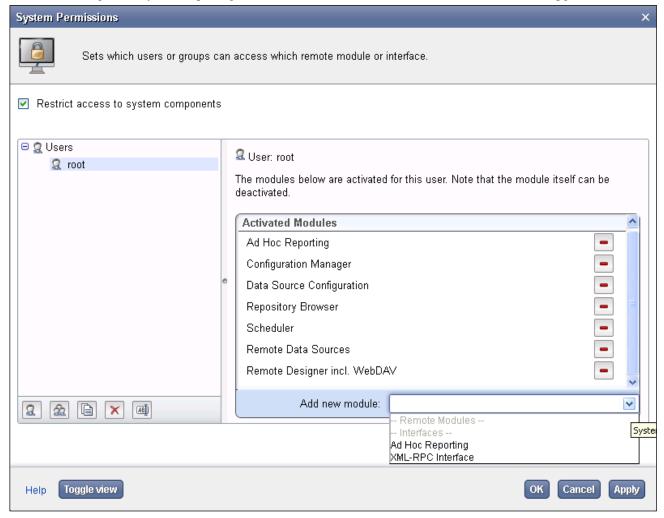


Figure 6: System Permissions Screen - Add 'root' user - Done

3. Creating a remote Report Repository and activating it –

Click on the 'Repository' option in the Components section. It shall open the 'Repository' screen. Click on the folder icon.

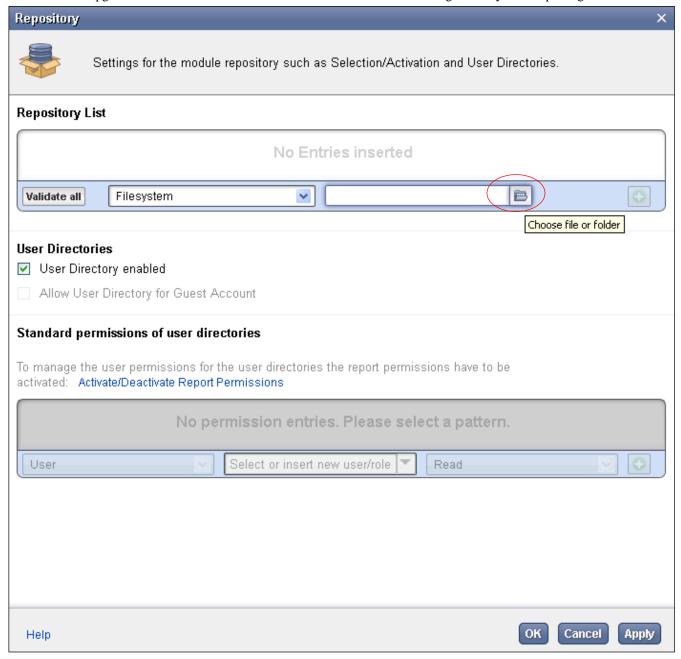


Figure 7: Repository Screen - Click folder icon

On the newly opened screen, browse to path "/Tekelec/WebNMS/reportingStudio" and click OK button.

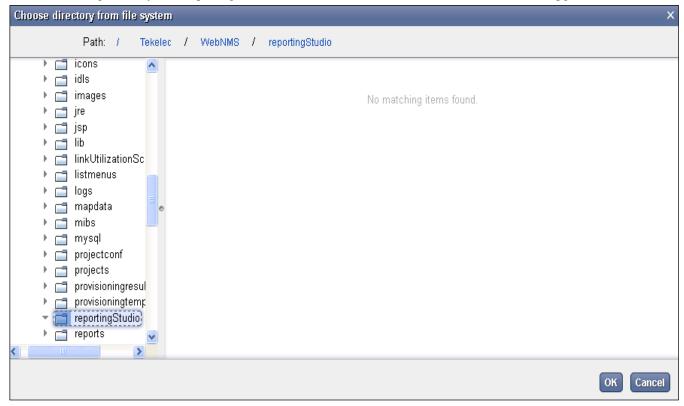


Figure 8: Repository Screen – Browse to repository path

Further, click the "+" icon on right side of the folder icon to add the previously selected repository path.

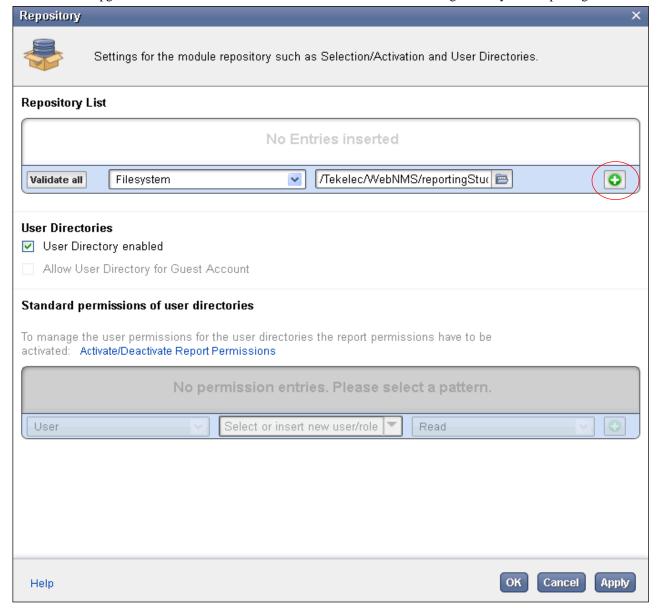
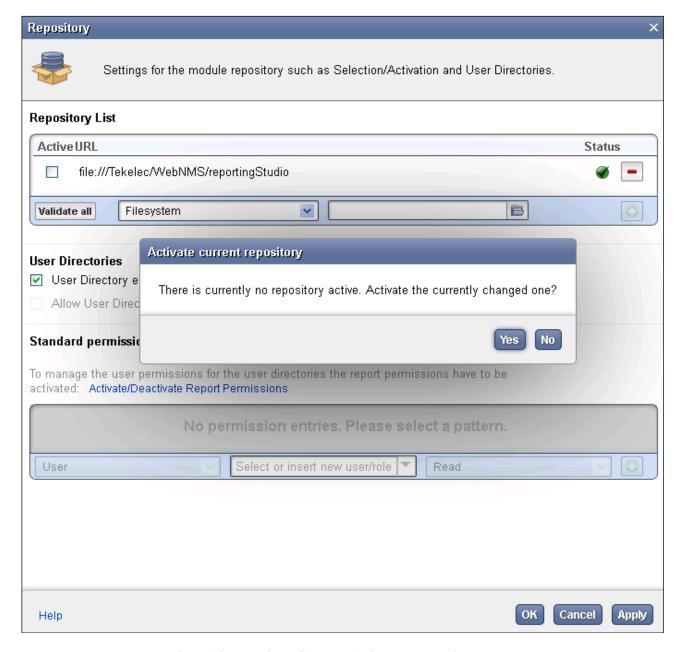


Figure 9: Repository Screen – Add the repository path

On the 'Activate current repository' pop-up, click Yes button. Then click Apply and OK buttons to save the changes.



**Figure 10: Repository Screen – Activate the repository** 

#### 4. Activating Scheduler–

The Scheduler feature is not enabled by default and it needs to be enabled for use.

Click on the 'Scheduler' option in the Components section. It shall open the 'Scheduler' screen. Select the checkbox against the 'Scheduler activated' option as shown below. Then, click Apply and OK buttons to save the changes.

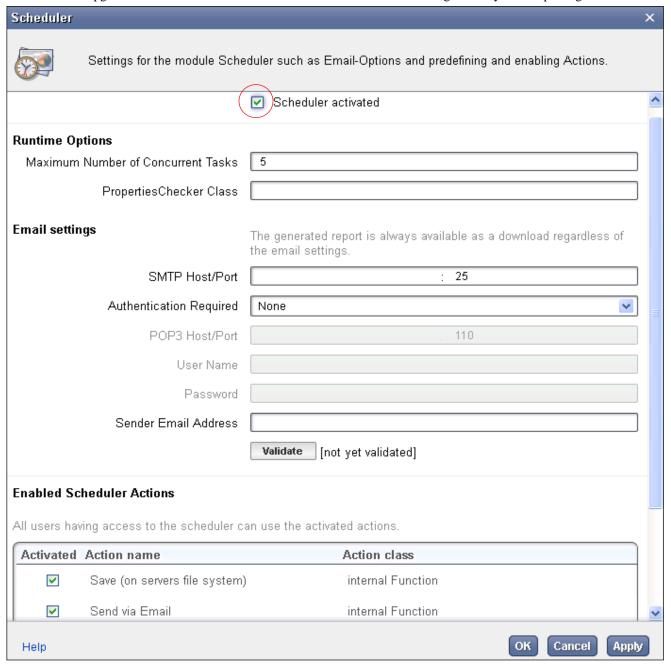


Figure 11: Activating Scheduler module

5. Adding E5ms filter for single sign on from E5-MS –

Click on the 'Customization' option in the System section. It shall open the 'Customization' screen. Add an entry "com.tekelec.e5ms.filter.E5msFilter" in the Servlet Filter text box and click on the "+" icon. This will add the "com.tekelec.e5ms.filter.E5msFilter" entry. Then, click on Apply and OK buttons to save the changes.

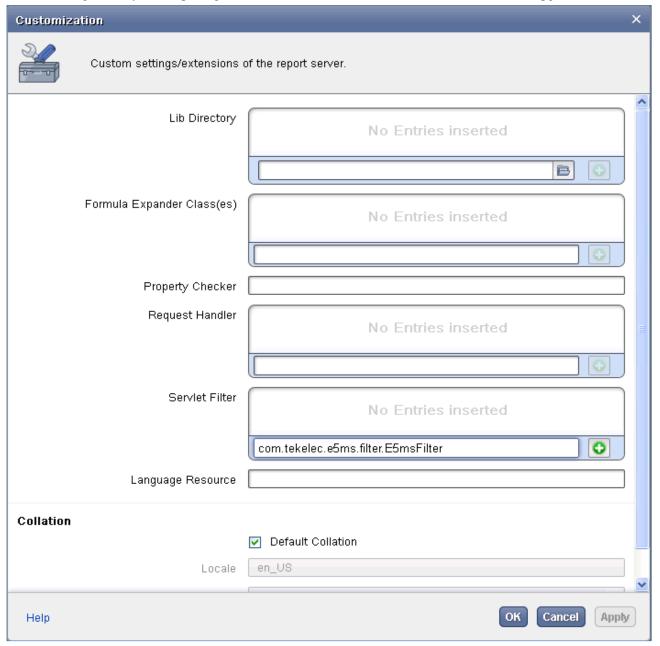


Figure 12: Adding E5ms Filter

## 6. Setting Login type –

Click on the 'Login/IP Filter' option in the Security section. It shall open the 'Login/IP Filter' screen. In the Login Type drop down, select value Internal Webserver. Then, click on Apply and OK buttons to save the changes.

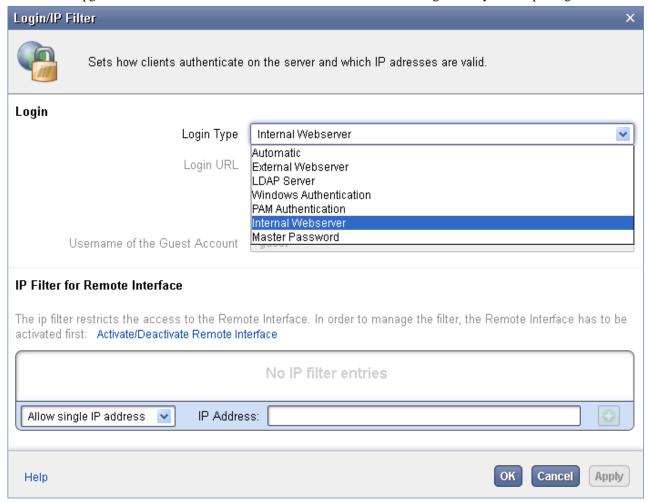


Figure 13: Setting Login Type

#### 7. Adding E5-MS database as the data source –

Click on 'Data Source Configuration' tab on Remote Interface screen. It shall open the Data Source Configuration screen. On this screen, Select tab User (root), click Add button and provide the database name 'e5msdb' and click OK as shown below -



Figure 14: Adding E5-MS database as datasource

On the next page, select the MySQL driver as shown below and click OK.

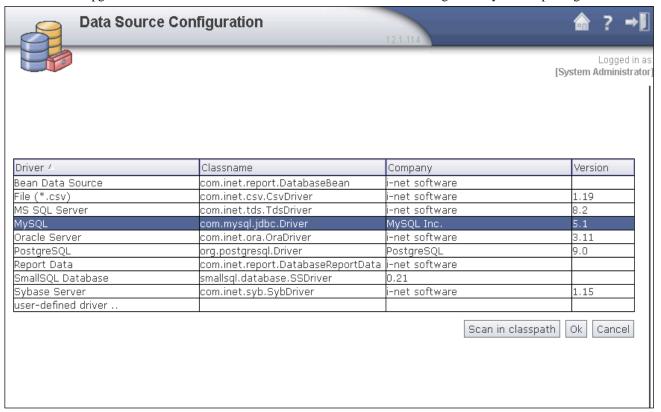


Figure 15: Adding E5-MS database - Select driver

On the next page, provide values for User, Password, Host and Database fields as shown below. If E5-MS server is running, then on clicking the Check Connection button, it shall show a connection successful message as shown below -



Figure 16: Adding E5-MS database - Done

### 5.0 STOPPING I-NET CLEAR REPORTS SERVER

To stop i-net Clear Reports server, following steps should be performed by 'root' or a system admin user -

1. cd to the i-net Clear Reports installation directory –

```
# cd /usr/local/i-net\ Clear\ Reports/
```

2. Stop i-net Clear Reports server by using following command –

# sh stopListener.sh

#### 6.0 UNINSTALLATION OF I-NET CLEAR REPORTS

To uninstall i-net Clear Reports server, following steps should be performed by 'root' or a system admin user. Note that the uninstallation script launches windows so the display of server shall be properly forwarded —

1. cd to the i-net Clear Reports installation directory –

# cd /usr/local/i-net\ Clear\ Reports/

2. Execute the uninstall script using following command –

# sh uninstall.sh

This shall display messages similar to following -

[root@e5ms1 i-net Clear Reports]# sh uninstall.sh
Starting the i-net Clear Reports Uninstaller
+ cd '/usr/local/i-net Clear Reports'
+ java -jar Uninstaller/uninstaller.jar
Command line uninstaller.

```
Force deletion: false
Processing destroy
/usr/local/i-net Clear Reports/uninstall.sh
/usr/local/i-net Clear Reports/tutorials/300_How_to_create_a_Chart.tut
/usr/local/i-net Clear Reports/tutorials/200 How to create a Report with a Datasource.tut
/usr/local/i-net Clear Reports/tutorials/100 How to create a Datasource.tut
/usr/local/i-net Clear Reports/templates/04-reportsamples/pie_chart_sample.rpt
/usr/local/i-net Clear Reports/templates/04-reportsamples/orders per products.rpt
/usr/local/i-net Clear Reports/templates/04-reportsamples/multicolumn.rpt
/usr/local/i-net Clear Reports/templates/04-reportsamples/mailing label.rpt
/usr/local/i-net Clear Reports/templates/04-reportsamples/empoftheyear.rpt
/usr/local/i-net Clear Reports/templates/04-reportsamples/customerprofilereport.rpt
/usr/local/i-net Clear Reports/templates/04-reportsamples/crosstab sample.rpt
/usr/local/i-net Clear Reports/templates/04-reportsamples/bowling sample.rpt
/usr/local/i-net Clear Reports/templates/04-reportsamples/bar chart sample.rpt
/usr/local/i-net Clear Reports/templates/04-reportsamples/.directoryName
/usr/local/i-net Clear Reports/templates/03-blueberry/05-blueberry-crosstab-landscape.rpt
/usr/local/i-net Clear Reports/templates/03-blueberry/04-blueberry-crosstab-portrait.rpt
/usr/local/i-net Clear Reports/templates/03-blueberry/03-blueberry-chart-landscape.rpt
/usr/local/i-net Clear Reports/templates/03-blueberry/02-blueberry-chart-portrait.rpt
/usr/local/i-net Clear Reports/templates/03-blueberry/01-blueberry-table-data.rpt
/usr/local/i-net Clear Reports/templates/03-blueberry/.directoryName
/usr/local/i-net Clear Reports/templates/02-summer-breeze/05-summer-breeze-crosstab-
landscape.rpt
/usr/local/i-net Clear Reports/templates/02-summer-breeze/04-summer-breeze-crosstab-
portrait.rpt
/usr/local/i-net Clear Reports/templates/02-summer-breeze/03-summer-breeze-chart-
landscape.rpt
/usr/local/i-net Clear Reports/templates/02-summer-breeze/02-summer-breeze-chart-
portrait.rpt
/usr/local/i-net Clear Reports/templates/02-summer-breeze/01-summer-breeze-table-data.rpt
/usr/local/i-net Clear Reports/templates/02-summer-breeze/.directoryName
/usr/local/i-net Clear Reports/templates/01-unstyled/10-unstyled-labels.rpt
/usr/local/i-net Clear Reports/templates/01-unstyled/09-unstyled-complex-landscape.rpt
/usr/local/i-net Clear Reports/templates/01-unstyled/08-unstyled-complex-portrait.rpt
```

```
/usr/local/i-net Clear Reports/templates/01-unstyled/07-unstyled-table-data-landscape.rpt
/usr/local/i-net Clear Reports/templates/01-unstyled/06-unstyled-table-data-portrait.rpt
/usr/local/i-net Clear Reports/templates/01-unstyled/05-unstyled-crosstab-landscape.rpt
/usr/local/i-net Clear Reports/templates/01-unstyled/04-unstyled-crosstab-portrait.rpt
/usr/local/i-net Clear Reports/templates/01-unstyled/03-unstyled-chart-landscape.rpt
/usr/local/i-net Clear Reports/templates/01-unstyled/02-unstyled-chart-portrait.rpt
/usr/local/i-net Clear Reports/templates/01-unstyled/01-unstyled-table-data.rpt
/usr/local/i-net Clear Reports/templates/01-unstyled/.directoryName
/usr/local/i-net Clear Reports/stopListener.sh
/usr/local/i-net Clear Reports/startpage/style.css
/usr/local/i-net Clear Reports/startpage/start.rpt
/usr/local/i-net Clear Reports/startpage/reportPermissions.xml
/usr/local/i-net Clear Reports/startpage/index.html
/usr/local/i-net Clear Reports/startpage/images/scheduler.png
/usr/local/i-net Clear Reports/startpage/images/remote-interface.png
/usr/local/i-net Clear Reports/startpage/images/mod scheduler.png
/usr/local/i-net Clear Reports/startpage/images/mod adhoc.png
/usr/local/i-net Clear Reports/startpage/images/logo.png
/usr/local/i-net Clear Reports/startpage/images/error.png
/usr/local/i-net Clear Reports/startpage/images/designer_70.png
/usr/local/i-net Clear Reports/startpage/images/cc-background-top.jpg
/usr/local/i-net Clear Reports/startpage/images/bullet.gif
/usr/local/i-net Clear Reports/startpage/images/background-bottom.jpg
/usr/local/i-net Clear Reports/startpage/error.json
/usr/local/i-net Clear Reports/startpage/error.html
/usr/local/i-net Clear Reports/startStandaloneConfiguration.sh
/usr/local/i-net Clear Reports/startListener.sh
/usr/local/i-net Clear Reports/setup_tmp/inetold-rpt.xml
/usr/local/i-net Clear Reports/setup tmp/inet-rpt.xml
/usr/local/i-net Clear Reports/setup_tmp/inet-jra.xml
/usr/local/i-net Clear Reports/setup tmp/inet-dataview.xml
/usr/local/i-net Clear Reports/setup tmp/default sybase.xml
/usr/local/i-net Clear Reports/setup_tmp/default_postgresql.xml
/usr/local/i-net Clear Reports/setup tmp/default oracle.xml
/usr/local/i-net Clear Reports/setup_tmp/default_mysql.xml
/usr/local/i-net Clear Reports/setup tmp/default mssql.xml
/usr/local/i-net Clear Reports/setup tmp/crystalclear.properties
/usr/local/i-net Clear Reports/setup_tmp/client/documentation/ccruntime.html
/usr/local/i-net Clear Reports/setup tmp/ccsetup.jar
/usr/local/i-net Clear Reports/setup_tmp/LayoutDatasource.xml
/usr/local/i-net Clear Reports/setup tmp/CCLnF.jar
/usr/local/i-net Clear Reports/sampledatabase/smallsql.master
/usr/local/i-net Clear Reports/sampledatabase/bowlingResults.sdb
/usr/local/i-net Clear Reports/sampledatabase/Signature.sdb
/usr/local/i-net Clear Reports/sampledatabase/ProjectManagement.sdb
/usr/local/i-net Clear Reports/sampledatabase/Products.sdb
/usr/local/i-net Clear Reports/sampledatabase/Products.lob
/usr/local/i-net Clear Reports/sampledatabase/Orders.sdb
/usr/local/i-net Clear Reports/sampledatabase/Order Details.sdb
/usr/local/i-net Clear Reports/sampledatabase/JavaClasses.sdb
/usr/local/i-net Clear Reports/sampledatabase/Employees.sdb
```

```
/usr/local/i-net Clear Reports/sampledatabase/EmployeeAddresses.sdb
/usr/local/i-net Clear Reports/sampledatabase/Customers.sdb
/usr/local/i-net Clear Reports/lib/waffle/waffle-jna.jar
/usr/local/i-net Clear Reports/lib/waffle/platform.jar
/usr/local/i-net Clear Reports/lib/waffle/libpam4j.jar
/usr/local/i-net Clear Reports/lib/waffle/jna.jar
/usr/local/i-net Clear Reports/lib/waffle/guava.jar
/usr/local/i-net Clear Reports/lib/waffle/License_libpam4j.txt
/usr/local/i-net Clear Reports/lib/waffle/License jna.txt
/usr/local/i-net Clear Reports/lib/waffle/License_guava.txt
/usr/local/i-net Clear Reports/lib/waffle/License.txt
/usr/local/i-net Clear Reports/lib/driver/smallsql.jar
/usr/local/i-net Clear Reports/lib/driver/postgresql-jdbc4_license.txt
/usr/local/i-net Clear Reports/lib/driver/postgresql-jdbc4.jar
/usr/local/i-net Clear Reports/lib/driver/mysql-connector-java_license.txt
/usr/local/i-net Clear Reports/lib/driver/mysql-connector-java.jar
/usr/local/i-net Clear Reports/lib/driver/Syto.jar
/usr/local/i-net Clear Reports/lib/driver/Oranxo.jar
/usr/local/i-net Clear Reports/lib/driver/Merlia.jar
/usr/local/i-net Clear Reports/lib/driver/License_smallsql.txt
/usr/local/i-net Clear Reports/lib/driver/LayoutJDBCDriver.jar
/usr/local/i-net Clear Reports/lib/driver/Fositex.jar
/usr/local/i-net Clear Reports/lib/dataview-fileicon.ico
/usr/local/i-net Clear Reports/lib/commons-logging.jar
/usr/local/i-net Clear Reports/lib/cc.ico
/usr/local/i-net Clear Reports/lib/cc-uninstall.ico
/usr/local/i-net Clear Reports/lib/cc-fileicon.ico
/usr/local/i-net Clear Reports/lib/beans/zxing/zxing_core_javase.jar
/usr/local/i-net Clear Reports/lib/beans/svgSalamander-tiny.jar
/usr/local/i-net Clear Reports/lib/beans/jeuclid.jar
/usr/local/i-net Clear Reports/lib/beans/ZxingBarCodes.jar
/usr/local/i-net Clear Reports/lib/beans/License svgSalamander.txt
/usr/local/i-net Clear Reports/lib/beans/License_JGaugeBean.txt
/usr/local/i-net Clear Reports/lib/beans/License JEuclid.txt
/usr/local/i-net Clear Reports/lib/beans/License_JBarcodeBean.txt
/usr/local/i-net Clear Reports/lib/beans/JGaugeBean.jar
/usr/local/i-net Clear Reports/lib/beans/JBarcodeBean.jar
/usr/local/i-net Clear Reports/lib/beans/BarcodePDF417Bean.jar
/usr/local/i-net Clear Reports/lib/Scheduler.jar
/usr/local/i-net Clear Reports/lib/Configuration.jar
/usr/local/i-net Clear Reports/lib/Config-Manager.ico
/usr/local/i-net Clear Reports/gettingstarted.html
/usr/local/i-net Clear Reports/core/xmlrpc-1.1.1.jar
/usr/local/i-net Clear Reports/core/webdav/webdavclient4j-core-0.92.jar
/usr/local/i-net Clear Reports/core/webdav/jdom-1.0.jar
/usr/local/i-net Clear Reports/core/webdav/commons-httpclient-3.0.1.jar
/usr/local/i-net Clear Reports/core/webdav/commons-codec-1.3.jar
/usr/local/i-net Clear Reports/core/webdav/License_jdom.txt
/usr/local/i-net Clear Reports/core/webdav/License.txt
/usr/local/i-net Clear Reports/core/slf4j-api-1.6.1.jar
/usr/local/i-net Clear Reports/core/milton/mime-util.jar
```

```
/usr/local/i-net Clear Reports/core/milton/milton-servlet-1.4.jar
/usr/local/i-net Clear Reports/core/milton/milton-api-1.4.jar
/usr/local/i-net Clear Reports/core/milton/License.txt
/usr/local/i-net Clear Reports/core/milton/License.html
/usr/local/i-net Clear Reports/core/mail.jar
/usr/local/i-net Clear Reports/core/lucene/lucene-core.jar
/usr/local/i-net Clear Reports/core/lucene/compass.jar
/usr/local/i-net Clear Reports/core/lucene/License.txt
/usr/local/i-net Clear Reports/core/jsr305.jar
/usr/local/i-net Clear Reports/core/jhall.jar
/usr/local/i-net Clear Reports/core/jfreechartCC.jar
/usr/local/i-net Clear Reports/core/jfreechart-licence.txt
/usr/local/i-net Clear Reports/core/jetty/jsp-api-2.0.jar
/usr/local/i-net Clear Reports/core/jetty/jetty licenses.zip
/usr/local/i-net Clear Reports/core/jetty/CCservlet-api-2.5.jar
/usr/local/i-net Clear Reports/core/jetty/CCjetty.jar
/usr/local/i-net Clear Reports/core/jetty/CCjetty-util.jar
/usr/local/i-net Clear Reports/core/jcommon.jar
/usr/local/i-net Clear Reports/core/gwt-servlet.jar
/usr/local/i-net Clear Reports/core/gwt-servlet-deps.jar
/usr/local/i-net Clear Reports/core/ehcache-core.jar
/usr/local/i-net Clear Reports/core/echo2/echopointng.jar
/usr/local/i-net Clear Reports/core/echo2/commons-fileupload-1.0.jar
/usr/local/i-net Clear Reports/core/echo2/MPL-1.1.txt
/usr/local/i-net Clear Reports/core/echo2/LICENSE-2.0.txt
/usr/local/i-net Clear Reports/core/echo2/Echo2 WebRender.jar
/usr/local/i-net Clear Reports/core/echo2/Echo2_WebContainer.jar
/usr/local/i-net Clear Reports/core/echo2/Echo2_FileTransfer_WebContainer.jar
/usr/local/i-net Clear Reports/core/echo2/Echo2 FileTransfer App.jar
/usr/local/i-net Clear Reports/core/echo2/Echo2_Extras_WebContainer.jar
/usr/local/i-net Clear Reports/core/echo2/Echo2 Extras App.jar
/usr/local/i-net Clear Reports/core/echo2/Echo2 App.jar
/usr/local/i-net Clear Reports/core/designer/swing-layout.jar
/usr/local/i-net Clear Reports/core/designer/jortho.jar
/usr/local/i-net Clear Reports/core/designer/SBSTutorial.jar
/usr/local/i-net Clear Reports/core/designer/License swing-layout.txt
/usr/local/i-net Clear Reports/core/designer/License sbstutorial.txt
/usr/local/i-net Clear Reports/core/designer/License_JOrtho.txt
/usr/local/i-net Clear Reports/core/commons-net-3.0.1.jar
/usr/local/i-net Clear Reports/core/commons-logging.jar
/usr/local/i-net Clear Reports/core/commons-digester3-3.2-with-deps.jar
/usr/local/i-net Clear Reports/core/adhocLoader.jar
/usr/local/i-net Clear Reports/core/adhocClient.jar
/usr/local/i-net Clear Reports/core/activation.jar
/usr/local/i-net Clear Reports/core/TableLayout.jar
/usr/local/i-net Clear Reports/core/ReportViewer.jar
/usr/local/i-net Clear Reports/core/RemoteGUI.jar
/usr/local/i-net Clear Reports/core/License_xmlrpc.txt
/usr/local/i-net Clear Reports/core/License gwt.txt
/usr/local/i-net Clear Reports/core/JnlpDesigner.jar
/usr/local/i-net Clear Reports/core/JWebEngine.jar
```

```
/usr/local/i-net Clear Reports/core/Designer.jar
/usr/local/i-net Clear Reports/core/ClearReports.jar
/usr/local/i-net Clear Reports/core/CCLib.jar
/usr/local/i-net Clear Reports/client/svgviewer/zoomout.gif
/usr/local/i-net Clear Reports/client/svgviewer/zoomin.gif
/usr/local/i-net Clear Reports/client/svgviewer/unlock.gif
/usr/local/i-net Clear Reports/client/svgviewer/start disabled.gif
/usr/local/i-net Clear Reports/client/svgviewer/start.gif
/usr/local/i-net Clear Reports/client/svgviewer/singlepage.gif
/usr/local/i-net Clear Reports/client/svgviewer/save.gif
/usr/local/i-net Clear Reports/client/svgviewer/print.gif
/usr/local/i-net Clear Reports/client/svgviewer/next disabled.gif
/usr/local/i-net Clear Reports/client/svgviewer/next.gif
/usr/local/i-net Clear Reports/client/svgviewer/lock.gif
/usr/local/i-net Clear Reports/client/svgviewer/export.gif
/usr/local/i-net Clear Reports/client/svgviewer/end disabled.gif
/usr/local/i-net Clear Reports/client/svgviewer/end.gif
/usr/local/i-net Clear Reports/client/svgviewer/dropdown.png
/usr/local/i-net Clear Reports/client/svgviewer/doublepage disabled.gif
/usr/local/i-net Clear Reports/client/svgviewer/doublepage.gif
/usr/local/i-net Clear Reports/client/svgviewer/doublecontinous disabled.gif
/usr/local/i-net Clear Reports/client/svgviewer/doublecontinous.gif
/usr/local/i-net Clear Reports/client/svgviewer/back_disabled.gif
/usr/local/i-net Clear Reports/client/svgviewer/back.gif
/usr/local/i-net Clear Reports/client/prompt/static-gwt.css
/usr/local/i-net Clear Reports/client/prompt/prompt.nocache.js
/usr/local/i-net Clear Reports/client/prompt/hosted.html
/usr/local/i-net Clear Reports/client/prompt/gwt/standard/standard_rtl.css
/usr/local/i-net Clear Reports/client/prompt/gwt/standard/standard.css
/usr/local/i-net Clear Reports/client/prompt/gwt/standard/images/vborder_ie6.png
/usr/local/i-net Clear Reports/client/prompt/gwt/standard/images/vborder.png
/usr/local/i-net Clear Reports/client/prompt/gwt/standard/images/splitPanelThumb.png
/usr/local/i-net Clear
Reports/client/prompt/gwt/standard/images/ie6/vborder gray shadow.png
/usr/local/i-net Clear
Reports/client/prompt/gwt/standard/images/ie6/vborder blue shadow.png
/usr/local/i-net Clear
Reports/client/prompt/gwt/standard/images/ie6/hborder gray shadow.png
/usr/local/i-net Clear
Reports/client/prompt/gwt/standard/images/ie6/hborder blue shadow.png
/usr/local/i-net Clear
Reports/client/prompt/gwt/standard/images/ie6/corner dialog topright.png
/usr/local/i-net Clear
Reports/client/prompt/gwt/standard/images/ie6/corner dialog topleft.png
/usr/local/i-net Clear Reports/client/prompt/gwt/standard/images/hborder ie6.png
/usr/local/i-net Clear Reports/client/prompt/gwt/standard/images/hborder.png
/usr/local/i-net Clear Reports/client/prompt/gwt/standard/images/corner ie6.png
/usr/local/i-net Clear Reports/client/prompt/gwt/standard/images/corner.png
/usr/local/i-net Clear Reports/client/prompt/colors.css
/usr/local/i-net Clear Reports/client/prompt/clear.cache.gif
/usr/local/i-net Clear Reports/client/prompt/EFF4EE18B737FCBE4E802D27AEF03FB6.cache.html
/usr/local/i-net Clear Reports/client/prompt/EDC7827FEEA59EE44AD790B1C6430C45.cache.png
```

```
/usr/local/i-net Clear Reports/client/prompt/E44767377485D18D6B6864F65BA8EF73.cache.png
/usr/local/i-net Clear Reports/client/prompt/DF7764EEC1903CD03C9545B354D8D8E4.cache.png
/usr/local/i-net Clear Reports/client/prompt/D124619199E91C758B040D7EBDB8137E.cache.html
/usr/local/i-net Clear Reports/client/prompt/C4DA5A6DC1EC4AEC52B3FB464706B366.cache.html
/usr/local/i-net Clear Reports/client/prompt/ACFBDF8485BF82D614A5C415F3BFE42D.cache.html
/usr/local/i-net Clear Reports/client/prompt/A511C9E0BCF1E8B953CB45A1E9FAF14D.cache.html
/usr/local/i-net Clear Reports/client/prompt/A254687876623CA647090B38B47B9D82.cache.html
/usr/local/i-net Clear Reports/client/prompt/9F54EEBDF0F89D40F239D6FAD4DC02C8.cache.html
/usr/local/i-net Clear Reports/client/prompt/9C4DBD8966DCFFBC1EE1278C896F6F65.cache.html
/usr/local/i-net Clear Reports/client/prompt/9A43C7A2A24C3A2A5CA12F8FAC3A0ABC.gwt.rpc
/usr/local/i-net Clear Reports/client/prompt/8B18766A69586CF39F78EFA08EDEFA5A.cache.html
/usr/local/i-net Clear Reports/client/prompt/8603379B5088782D2C0620FAE856E112.cache.png
/usr/local/i-net Clear Reports/client/prompt/7CE10ED14F903D6393613D3C4510CB0E.cache.html
/usr/local/i-net Clear Reports/client/prompt/62173631D35272D2ADCCD0D29743B7D4.cache.html
/usr/local/i-net Clear Reports/client/prompt/50F879137934FFF1F0C4AE438C095215.cache.png
/usr/local/i-net Clear Reports/client/prompt/4D4C3B94A087E5325D48925FDED3A6EE.cache.html
/usr/local/i-net Clear Reports/client/prompt/48000E2BAA21BEDF8A1E7E98FDAE85EF.cache.html
/usr/local/i-net Clear Reports/client/prompt/396F806CD63ABD414BFBB9D57429F05B.cache.png
/usr/local/i-net Clear Reports/client/prompt/343EA543BA64CE0B62FFADB08F79F438.cache.html
/usr/local/i-net Clear Reports/client/prompt/323B5BF681DF9042E36CD8F436CE655F.cache.png
/usr/local/i-net Clear Reports/client/prompt/2C1B980EE20206A9D4ED8E02C31D6504.cache.html
/usr/local/i-net Clear Reports/client/prompt/2869D097E8ED12E6E65FB7BC054F8BA1.cache.html
/usr/local/i-net Clear Reports/client/prompt/19EE590F021AEBB2F416EACA2EB7B91C.cache.html
/usr/local/i-net Clear Reports/client/prompt/0A9476898799A150D840F0B1C3672921.cache.png
/usr/local/i-net Clear Reports/client/prompt/078515D10D3B7B6F7159863FBCBB069A.cache.html
/usr/local/i-net Clear Reports/client/favicon.ico
/usr/local/i-net Clear Reports/client/favicon.icns
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/xls.html
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/txt.html
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/ps.html
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/pdf.html
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/image.html
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/htm.html
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/export-
xls.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/export-
txt.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/export-
ps.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/export-
pdf.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/export-
jpg.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/export-
html.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/export-
csv.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats/csv.html
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-formats.html
/usr/local/i-net Clear Reports/client/documentation/viewer/en/export-dialog.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/xls.html
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/txt.html
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/ps.html
```

```
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/pdf.html
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/image.html
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/html
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/export-xls-
german.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/export-txt-
german.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/export-ps-
german.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/export-pdf-
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/export-jpg-
german.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/export-html-
german.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/export-csv-
german.jpg
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats/csv.html
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-formats.html
/usr/local/i-net Clear Reports/client/documentation/viewer/de/export-dialog-german.jpg
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
setup/images/logo.png
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
setup/images/favicon.ico
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
setup/images/bullet.gif
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
setup/images/background-bottom-light.jpg
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
documentation/images/topimage.png
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
documentation/images/pagebackground.jpg
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
documentation/images/logo.png
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
documentation/images/list-style-image.png
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
documentation/images/header-logo.png
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
documentation/images/favicon.ico
/usr/local/i-net Clear Reports/client/documentation/lib/tpl/clearreports-
documentation/images/bullet.gif
/usr/local/i-net Clear
Reports/client/documentation/lib/plugins/popupviewer/images/modifier-images.png
/usr/local/i-net Clear
Reports/client/documentation/lib/plugins/popupviewer/images/loading.gif
/usr/local/i-net Clear Reports/client/documentation/lib/exe/js.php.t.clearreports-
documentation.js
/usr/local/i-net Clear Reports/client/documentation/lib/exe/css.php.t.clearreports-
setup.css
/usr/local/i-net Clear Reports/client/documentation/lib/exe/css.php.t.clearreports-
documentation.css
/usr/local/i-net Clear
Reports/client/documentation/lib/exe/css.php.s.print.t.clearreports-setup.css
/usr/local/i-net Clear
Reports/client/documentation/lib/exe/css.php.s.print.t.clearreports-documentation.css
```

/usr/local/i-net Clear Reports/client/documentation/gettingstarted.html

```
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
setup/images/logo.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
setup/images/favicon.ico
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
setup/images/bullet.gif
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
setup/images/background-bottom-light.jpg
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
documentation/images/topimage.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
documentation/images/pagebackground.jpg
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
documentation/images/logo.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
documentation/images/list-style-image.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
documentation/images/header-logo.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
documentation/images/favicon.ico
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/tpl/clearreports-
documentation/images/bullet.gif
/usr/local/i-net Clear
Reports/client/documentation/adhoc/lib/plugins/popupviewer/images/modifier-images.png
/usr/local/i-net Clear
Reports/client/documentation/adhoc/lib/plugins/popupviewer/images/loading.gif
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/exe/js.php.t.clearreports-
documentation.js
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/exe/css.php.t.clearreports-
setup.css
/usr/local/i-net Clear Reports/client/documentation/adhoc/lib/exe/css.php.t.clearreports-
documentation.css
/usr/local/i-net Clear
Reports/client/documentation/adhoc/lib/exe/css.php.s.print.t.clearreports-setup.css
/usr/local/i-net Clear
Reports/client/documentation/adhoc/lib/exe/css.php.s.print.t.clearreports-
documentation.css
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/sum.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/sortup.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/sortoriginal.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/sortdown.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/sort.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/f unknown 16.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/f t 16.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/f s 16.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/f n 16.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/f dt 16.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/f d 16.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/f cur 16.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/f bin 16.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/images/f b 16.png
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/visuallinking.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/summary.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/reporttype.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/mailinglabel.html
```

```
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/groups.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/filter.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/document.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/dataview.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/datasource.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/crosstab.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/column.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/en/chart.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/visuallinking.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/summary.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/reporttype.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/mailinglabel.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/groups.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/filter.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/document.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/dataview.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/datasource.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/crosstab.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/column.html
/usr/local/i-net Clear Reports/client/documentation/adhoc/de/chart.html
/usr/local/i-net Clear Reports/Uninstaller/uninstaller.jar
/usr/local/i-net Clear Reports/Uninstaller/uninstallAssociations.sh
/usr/local/i-net Clear Reports/Uninstaller/inetold-rpt.xml
/usr/local/i-net Clear Reports/Uninstaller/inet-rpt.xml
/usr/local/i-net Clear Reports/Uninstaller/inet-jra.xml
/usr/local/i-net Clear Reports/Uninstaller/inet-dataview.xml
/usr/local/i-net Clear Reports/Listener.sh
/usr/local/i-net Clear Reports/ClearReportsSetup 1366576824227.txt
/root/Downloads/clear-reports/ClearReportsSetup 1366576824227.txt
[ cleanups ]
creating Logfile: 'ClearReportsSetup_1366576960550.txt' in: '/usr/local/i-net Clear
Reports'
[Finished]
```

3. Remove the installation directory – Come a level up on system and verify if i-net Clear Reports installation directory still exists. If it does, remove it by using following commands –

```
# cd ..
# rm -rf i-net\ Clear\ Reports/
```

### APPENDIX A: MY ORACLE SUPPORT

CAUTION: Use only the guide downloaded from the Oracle Technology Network (OTN) (http://www.oracle.com/technetwork/indexes/documentation/oracle-comms-tekelec-2136003.html).

Before upgrading your system, access the **My Oracle Support** web portal (<a href="https://support.oracle.com">https://support.oracle.com</a>) and review any Knowledge Alerts that may be related to the System Health Check or the Upgrade.

Web portal (preferred option): My Oracle Support (MOS) (<a href="https://support.oracle.com">https://support.oracle.com</a>)

Phone: Contact your local Oracle Global Customer Support Center (<a href="http://www.oracle.com/support/contact.html">http://www.oracle.com/support/contact.html</a>)

Make the following selections on the Support telephone menu:

- 1. Select '2' for New Service Request
- 2. Select '3' for Hardware, Networking and Solaris Operating System Support
- 3. Select '1' for Technical Issues and when talking to the agent, please indicate that you are an existing Tekelec customer